

**APPLICATION**  
For  
**GRANT OF**  
**CERTIFICATION**

**FOR**

**MODEL:**

**STREETPILOT 2730**

**FM Transmitter**

**P/N 011-01147-xx**

**FCC ID: IHP-00880**

**IC: 1792A-00880**

FOR

**GARMIN INTERNATIONAL, INC.**

1200 East 151st Street

Olathe, KS 66062



# ROGERS LABS, INC.

4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone / Fax (913) 837-3214

## TEST REPORT

For

## APPLICATION of CERTIFICATION

For

### GARMIN INTERNATIONAL, INC.

1200 East 151st Street  
Olathe, KS 66062  
Phone: (913) 397-8200

Mr. Van Ruggles  
Director of Quality Assurance

MODEL: STREETPILOT 2730 PN 011-01147-xx

FM Transmitter  
FREQUENCY: 88-108 MHz

FCC ID: IPH-00880  
IC: 1792A-00880

Test Date: August 25, 2005

Certifying Engineer: *Scot D Rogers*  
Scot D. Rogers  
ROGERS LABS, INC.  
4405 West 259th Terrace  
Louisburg, KS 66053  
Phone: (913) 837-3214  
FAX: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

**TABLE OF CONTENTS**

**TABLE OF CONTENTS** 3

**APPLICABLE STANDARDS & TEST PROCEDURES** 4

**EQUIPMENT TESTED** 4

**LIST OF TEST EQUIPMENT** 5

**2.1033(B) APPLICATION FOR CERTIFICATION** 6

**EQUIPMENT AND CABLE CONFIGURATION** 7

    Test Setup 7

**EQUIPMENT FUNCTION AND TESTING PROCEDURES** 7

    Configuration options for the EUT 8

    AC Line Conducted Emission Test Procedure 8

    Radiated Emission Test Procedure 9

    Units of Measurements 9

    Test Site Locations 9

**SUBPART C - INTENTIONAL RADIATORS** 10

**15.203 ANTENNA REQUIREMENTS** 10

**15.205 RESTRICTED BANDS OF OPERATION** 10

    Data 15.205 11

    Summary of Results for Radiated Emissions in Restricted Bands 15.205 11

**15.207 CONDUCTED EMISSIONS LIMITS; GENERAL REQUIREMENTS** 12

    AC Line Conducted EMI 15.207 12

    Summary of Results for Conducted General Emissions 15.207 13

**15.209 RADIATED EMISSIONS LIMITS; GENERAL REQUIREMENTS** 14

    Radiated EMI 15.209 14

    Data 15.209 15

    Summary of Results for General Radiated Emissions 15.209 15

**15.239 OPERATION IN THE BAND 88-108 MHZ** 16

    Data 15.239 17

**SUMMARY OF RESULTS** 21

    Summary of Results for Radiated Emissions 15.239 21

    Statement of Modifications 21

**APPENDIX** 22

**Applicable Standards & Test Procedures**

- a) In accordance with the Federal Communications Code of Federal Regulations, dated October 1, 2004, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, applicable parts of paragraph 15, Part 15C paragraphs 15.231, and Industry Canada RSS-210, the following information is submitted.
- b) Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in the ANSI 63.4-2003 Document FCC and documents DA00-1407 and DA00-705.

**Equipment Tested**

<u>Equipment</u>	<u>Serial Number</u>	<u>FCC I.D.#</u>
StreetPilot 2730	XM6	IPH-00880
GPS Antenna	ENG #1	DoC
XM receiver	416	DoC
Automotive Mount	FM	N/A
Headphones		

### List of Test Equipment

A Hewlett Packard 8591EM and or 8562A Spectrum Analyzer was used as the measuring device for the emissions testing. The analyzer settings used are described in the following table. Refer to the Appendix for a complete list of Test Equipment.

<b>HP 8591EM SPECTRUM ANALYZER SETTINGS</b>		
CONDUCTED EMISSIONS:		
RBW	AVG. BW	DETECTOR FUNCTION
9 kHz	30 kHz	Peak/Quasi Peak
RADIATED EMISSIONS (30 - 1000 MHz):		
RBW	AVG. BW	DETECTOR FUNCTION
120 kHz	300 kHz	Peak/Quasi Peak
<b>HP 8562A SPECTRUM ANALYZER SETTINGS</b>		
RADIATED EMISSIONS (1 - 40 GHz):		
RBW	AVG. BW	DETECTOR FUNCTION
1 MHz	1 MHz	Peak/Average
ANTENNA CONDUCTED EMISSIONS:		
RBW	AVG. BW	DETECTOR FUNCTION
120 kHz	300 kHz	Peak

## 2.1033(b) Application for Certification

- (1) Manufacturer: GARMIN INTERNATIONAL, INC.  
1200 East 151st Street  
Olathe, KS 66062  
PHONE: (913) 397-8200
- (2) FCC Identification: FCC I.D.: IPH-00880
- (3) Copy of the installation and operating manual:  
Refer to exhibit for Draft Instruction Manual.
- (4) Description of Circuit Functions, Device Operation:  
The StreetPilot 2730 is a low power FM transmitter.
- (5) Block Diagram with Frequencies:  
Refer to exhibit for the Block Diagram
- (6) Report of measurements showing compliance with the  
pertinent FCC technical requires are provided in this  
report.
- (7) Photographs of equipment are provided in this report and  
exhibits.
- (8) Peripheral equipment or accessories for the equipment  
include output jack for audio, input port for XM  
receiver, GPS receiver, and Automotive mount with  
cabling. The unit was tested with all of the available  
peripheral options and continues to demonstrate  
compliance with the regulations.
- (9) Transition Provisions of 15.37 are not being requested.
- (10) The equipment is not a scanning receiver.
- (11) The equipment is not a transmitter operating in the 59-  
64 GHz frequency range.

## Equipment and Cable Configuration

### **Test Setup**


The EUT was arranged in typical user equipment configurations (configuration 1 was investigated for this report). The StreetPilot 2730 is a display and control unit for the GPS receiver used for location and navigation. It may be connected to periphery equipment as shown in the configurations diagram offering a variety of functionality for the end user. The FM transmitter would be used to interface with the FM receiver in an automobile to allow utilization of the cars audio system. For testing purposes, the unit was powered from the manufacturer supplied automotive wiring harness connected to a DC power supply. As requested by the manufacturer and required by the CFR, the unit was tested for emissions compliance using the available configurations with the worst-case data presented. Test results in this report relate only to the products described in this report.

## Equipment Function and Testing Procedures


The EUT is a multi-channel transmitter operating in the FM services frequency band. The unit allows a message, recorded or live, to be broadcast to a FM receiver in close proximity. The unit is targeted to broadcast the message received to the local automobile audio system. The design of the system allows for the use of FM channels not currently in use in the vehicles area.

**Configuration options for the EUT**

1. STP-2730 (GPN: 011-01147-04) connected to car cigarette lighter, power cable assembly (GPN: 011-01241-00), GA 27C external antenna (GPN: 011-00149-05), GXM30 XM Antenna(GPN: 011-01160-00), and headphones while broadcasting FM.

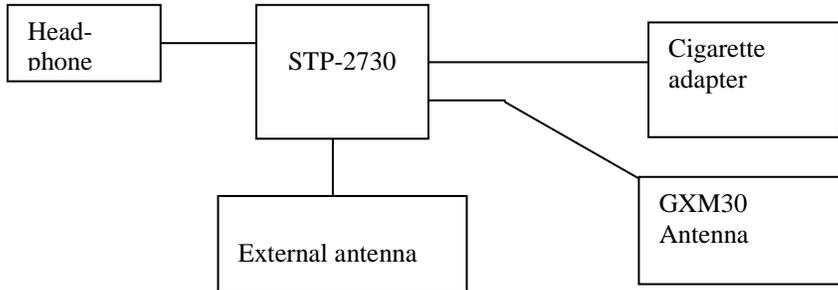

2. STP-2730 connected to AC power supply (GPN: 320-00171-11), and to computer through USB cable (GPN: 325-00128-00).

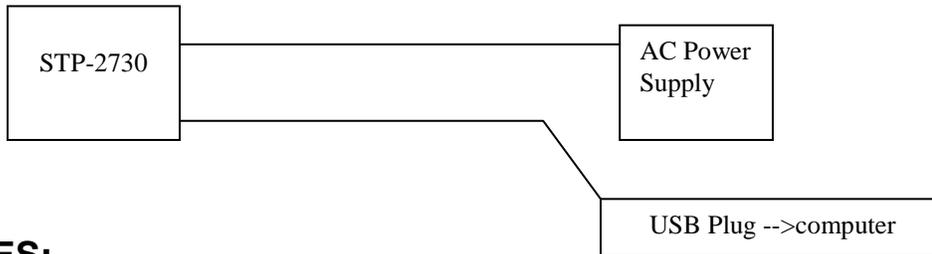

**NOTES:**

- A. The input voltage range for the cigarette lighter is 10-18Vdc.
- B. The input voltage range for the AC wall brick is 100-240Vac.
- C. The output voltage of the AC wall brick is 12Vdc @2Adc
- D. The output voltage range for the cigarette adapter is 10-18Vdc @2Adc.
- E. The clock/crystal frequencies operating in the DUT are: 45.158Mhz, 16.367673 MHz, 12.000MHz, 7.6Mhz and 32.768kHz

**AC Line Conducted Emission Test Procedure**

In configuration #1 the equipment operates solely from DC power offered in an auxiliary power port inside an automobile and is therefore exempt from AC Line conducted emissions testing. AC power line conducted emissions testing was performed using configuration #2 and presented in this report for completeness.

**Radiated Emission Test Procedure**

The EUT was placed on a rotating 1 x 1.5-meter wooden platform 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. EMI energy was maximized by equipment placement, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken using a spectrum analyzer. Refer to photographs in exhibits for EUT placement.

**Units of Measurements**

Conducted EMI: Data is in dB $\mu$ V; dB referenced to one microvolt.

Radiated EMI: Data is in dB $\mu$ V/m; dB/m referenced to one microvolt per meter.

**Test Site Locations**

Conducted EMI: ROGERS LABS, INC. located at 4405 W. 259<sup>th</sup> Terrace, Louisburg, KS.

Radiated EMI: The radiated emissions tests were performed at Rogers Labs, Inc. 3 meters Open Area Test Site (OATS).

Site Approval: Refer to Appendix for FCC Site Approval Letter, Reference 90910, And Dated August 15, 2003, Industry Canada reference IC 3041 dated August 30, 2003.

## Subpart C - Intentional Radiators

As per CFR Part 15, Subpart C the following information is submitted for consideration in obtaining a grant of certification for unlicensed intentional radiators.

### 15.203 Antenna Requirements

The unit is produced with a permanently attached antenna inside the automotive mount cable harness. No provisions for modification or alterations of the antenna configuration are available to the end user. The requirements of 15.203 are met there are no deviations or exceptions to the specification.

### 15.205 Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at the OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were checked at the OATS, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. No other significant emission was observed which fell into the restricted bands of operation. Computed emission values take into account the measured radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

Sample Calculations:

$$\begin{aligned} \text{Computed Peak (dB}\mu\text{V/m @ 3m)} &= \text{FSM (dB}\mu\text{V)} + \text{A.F. (dB)} - \text{Gain (dB)} \\ &= 54.3 + 7.0 - 30 \\ &= 31.3 \end{aligned}$$

**Data 15.205**

Radiated (Highest Emissions):

Emission Frequency (MHz)	FSM Horz. (dBμV)	FSM Vert. (dBμV)	Ant. Factor (dB)	Amp. Gain (dB)	RFS Horz. @ 3m (dBμV/m)	RFS Vert. @ 3m (dBμV/m)	Limit @ 3m (dBμV/m)
118.0	54.3	44.7	7.0	30	31.3	21.7	43.5
119.4	53.3	44.2	7.0	30	30.3	21.2	43.5
120.0	61.4	40.8	7.0	30	38.4	17.8	43.5
120.8	53.4	43.7	7.0	30	30.4	20.7	43.5
126.0	54.7	44.6	7.6	30	32.3	22.2	43.5
130.9	51.7	44.4	8.0	30	29.7	22.4	43.5
132.0	59.0	45.0	8.0	30	37.0	23.0	43.5
134.5	54.7	40.5	8.4	30	33.1	18.9	43.5
138.0	52.1	38.6	9.5	30	31.6	18.1	43.5
266.7	36.0	32.0	12.6	30	18.6	14.6	46.0
245.6	58.6	43.0	12.1	30	40.7	25.1	46.0
275.8	48.3	30.6	12.7	30	31.0	13.3	46.0
323.1	30.7	26.9	14.6	30	15.3	11.5	46.0
969.3	25.4	25.2	23.5	30	18.9	18.7	54.0

No other emissions found in the restricted bands.

**Summary of Results for Radiated Emissions in Restricted Bands 15.205**

The radiated emissions for the EUT meet the requirements for FCC CFR 47 Part 15.205 restricted bands of operation. The EUT had a 5.1 dB minimum margin below the limits. Other emissions were present with amplitudes at least 20 dB below the FCC Limits.

## 15.207 Conducted emissions limits; general requirements

### **AC Line Conducted EMI 15.207**

The EUT was arranged in typical equipment configuration (configuration #2) and placed on a 1 x 1.5-meter wooden bench 80 cm above the conducting ground plane, floor of a screen room. The bench was positioned 40 cm away from the wall of the screen room.

The LISN was positioned on the floor of the screen room 80-cm from the rear of the EUT. Testing for the line-conducted emissions was as follows. The ac adapter for the EUT (configurations #2) was connected to the LISN for line-conducted emissions testing. A second LISN was positioned on the floor of the screen room 80-cm from the rear of the supporting equipment of the EUT. All power cords except the EUT were then powered from the second LISN. EMI was coupled to the spectrum analyzer through a 0.1  $\mu$ F capacitor, internal to the LISN. Power line conducted emissions testing was carried out individually for each current carrying conductor of the EUT. The excess length of lead between the system and the LISN receptacle was folded back and forth to form a bundle not exceeding 40 cm in length. The screen room, conducting ground plane, analyzer, and LISN were bonded together to the protective earth ground. Preliminary testing was performed to identify the frequencies of each of these emissions, which had the highest amplitudes. The cables were repositioned to obtain maximum amplitude of measured EMI level. Once the worst-case configuration was identified, plots were made of the EMI from 0.15

MHz to 30 MHz then the data was recorded with maximum conducted emissions levels. Refer to Figures one and two for plots of the EUT conducted emissions frequency spectrum taken in the screen room.

**Summary of Results for Conducted General Emissions 15.207**

The conducted emissions for the EUT meet the requirements for FCC Part 15C Intentional Radiators. The EUT had a 9.9 dB minimum margin below the quasi-peak limits. The EUT had a 9.8 dB minimum margin below the average limits. Other emissions were present with amplitudes at least 20 dB below the FCC Limits.

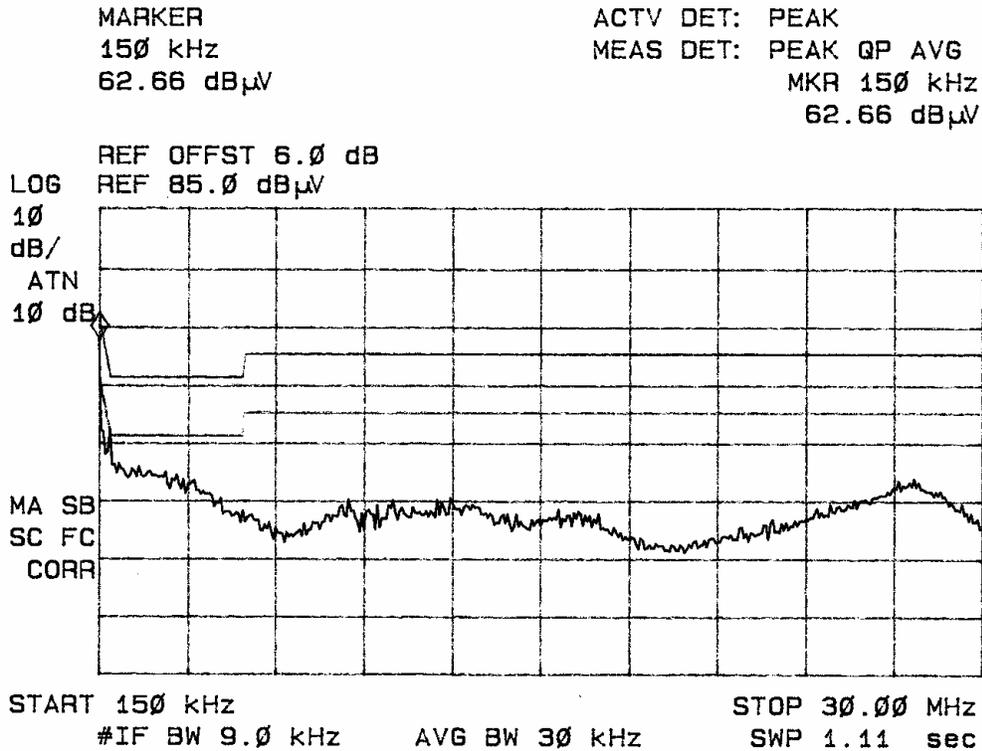


Figure one Conducted emissions of EUT line 1 (configuration #2).

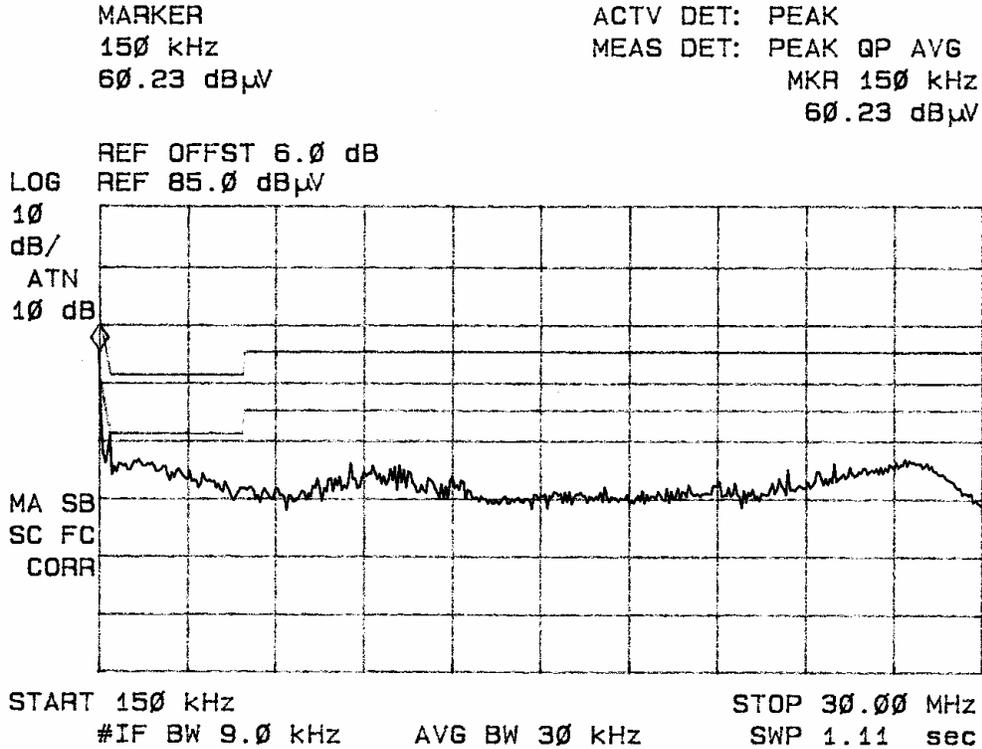


Figure two Conducted emissions of EUT line 2 (configuration #2).

### 15.209 Radiated emissions limits; general requirements

#### **Radiated EMI 15.209**

The EUT was arranged in a typical equipment configuration and operated through all of its various modes. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Plots were made of the frequency spectrum from 30 MHz to 1200 MHz for the preliminary testing. The highest radiated emission was then re-maximized at this location before final radiated emissions measurements were performed. Final data was taken with the EUT located at the open field test site at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum

from 30 MHz to 20,000 MHz was searched for radiated emissions. Measured emission levels were maximized by EUT placement on the table, changing cable location, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna polarization between horizontal and vertical. Antennas used were Broadband Biconical from 30 MHz to 200 MHz, Log Periodic from 200 MHz to 5 GHz, and/or Biconilog from 30 MHz to 1000 MHz, and Pyramidal Horns.

Sample Calculations:

$$\begin{aligned}
 \text{RFS} &= \text{Radiated Field Strength} \\
 \text{dB}\mu\text{V/m @ 3m} &= \text{dB}\mu\text{V} + \text{A.F.} - \text{Amplifier Gain} \\
 \text{dB}\mu\text{V/m @ 3m} &= 61.4 + 7.0 - 30 \\
 &= 38.4
 \end{aligned}$$

**Data 15.209**

Radiated (6 Highest Emissions) 15.209

Emission Freq. (MHz)	FSM Horz. (dBμV)	FSM Vert. (dBμV)	Ant. Factor (dB)	Amp. Gain (dB)	RFS Horz. @ 3m (dBμV/m)	RFS Vert. @ 3m (dBμV/m)	Limit @ 3m (dBμV/m)
120.0	61.4	40.8	7.0	30	38.4	17.8	43.5
132.0	59.0	45.0	8.0	30	37.0	23.0	43.5
229.1	51.2	43.0	11.4	30	32.6	24.4	46.0
230.4	50.4	42.3	11.4	30	31.8	23.7	46.0
230.5	51.2	36.4	11.4	30	32.6	17.8	46.0
245.6	58.6	43.0	12.1	30	40.7	25.1	46.0

Other emissions were present with amplitudes at least 20 dB below limits.

**Summary of Results for General Radiated Emissions 15.209**

The radiated emissions for the EUT meet the requirements for FCC Part 15C Intentional Radiators. The EUT had a 5.1 dB minimum margin below the limits. Other emissions were present with amplitudes at least 20 dB below the FCC Limits.

**15.239 Operation in the Band 88-108 MHz**

(a) Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88-108 MHz. The EUT only tunes 88.1-107.9 MHz and the emissions meet the 200 kHz wide band restriction. Therefore, the requirements are met. There are no deviations or exceptions to the specification.

(b) The field strength of any emission within the permitted 200 kHz band shall not exceed 250 micro volts/meter at 3 meters (48 dB $\mu$ V/m). The emission limit in this paragraph is based on measuring equipment employing an average detector. Emissions were measured and data recorded for this report. No emission was measured above the limitations of this part. Therefore, the requirements are satisfied. There are no deviations or exceptions to the specifications.

(c) The field strength of any emissions radiated on any frequency outside of the 200 kHz band shall not exceed the general radiated emission limits in 15.209. Emissions were measured and data recorded for this report. No emission was measured above the limitations of this part. Therefore, the requirements are satisfied. The requirements of 15.209 are met there are no deviations or exceptions to the specification. Refer to figures three through eight, radiated emissions taken in a screen room at 1-meter distance, demonstrating compliance to the requirements.

**Data 15.239**

Intentional and Spurious Emissions:


Emission Frequency (MHz)	FSM Horz. (dBµV)	FSM Vert. (dBµV)	Ant. Factor (dB)	Amp. Gain (dB)	RFS Horz. @ 3m (dBµV/m)	RFS Vert. @ 3m (dBµV/m)	Limit @ 3m (dBµV/m)
88.9	69.9	63.0	7.7	30	47.6	40.7	48.0
177.8	38.7	34.1	9.1	30	17.8	13.2	43.5
266.7	36.0	32.0	12.6	30	18.6	14.6	46.0
355.6	27.3	26.7	15.4	30	12.7	12.1	46.0
444.5	26.1	27.0	17.0	30	13.1	14.0	46.0
533.4	37.8	34.3	19.1	30	26.9	23.4	46.0
622.3	25.8	29.4	19.7	30	15.5	19.1	46.0
711.2	25.8	29.4	19.7	30	17.1	17.2	46.0
99.3	70.6	64.8	7.3	30	47.9	42.1	46.0
198.6	40.0	35.0	10.6	30	20.6	15.6	48.0
297.9	39.5	30.3	14.0	30	23.5	14.3	43.5
397.2	31.1	27.9	16.5	30	17.6	14.4	46.0
496.5	34.7	39.6	17.6	30	22.3	27.2	46.0
595.8	26.5	25.8	19.3	30	15.8	15.1	46.0
695.1	33.1	39.3	20.9	30	24.0	30.2	46.0
794.4	26.9	26.0	22.0	30	18.9	18.0	46.0
107.7	70.7	60.4	7.1	30	47.8	37.5	48.0
215.4	43.3	36.8	10.9	30	24.2	17.7	43.5
323.1	30.7	26.9	14.6	30	15.3	11.5	46.0
430.8	28.3	29.3	16.7	30	15.0	16.0	46.0
538.5	25.7	26.3	19.4	30	15.1	15.7	46.0
646.2	26.1	26.1	20.3	30	16.4	16.4	46.0
753.9	26.2	26.3	22.2	30	18.4	18.5	46.0
861.6	40.6	38.3	22.9	30	33.5	31.2	46.0

Other emissions were present with amplitudes at least 20 dB below limits.

MARKER  $\Delta$   
80.0 kHz  
2.00 dB

ACTV DET: PEAK  
MEAS DET: PEAK QP  
MKR 80.0 kHz  
2.00 dB

LOG REF 80.0 dB $\mu$ V

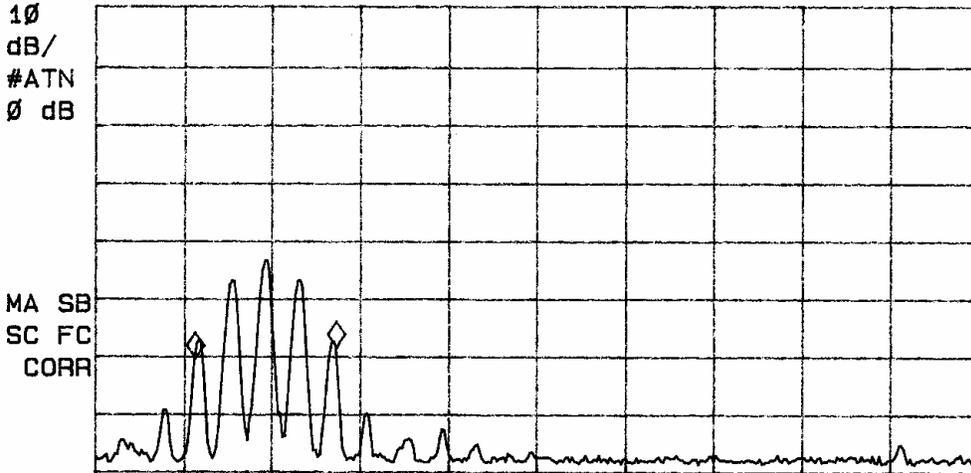


START 88.0000 MHz STOP 88.5000 MHz  
#IF BW 3.0 kHz AVG BW 3 kHz SWP 167 msec

Figure three Band Edges of operation (at 88.1 MHz)

MARKER  $\Delta$   
117.5 kHz  
4.09 dB

ACTV DET: PEAK  
MEAS DET: PEAK QP  
MKR 117.5 kHz  
4.09 dB

LOG REF 80.0 dB $\mu$ V

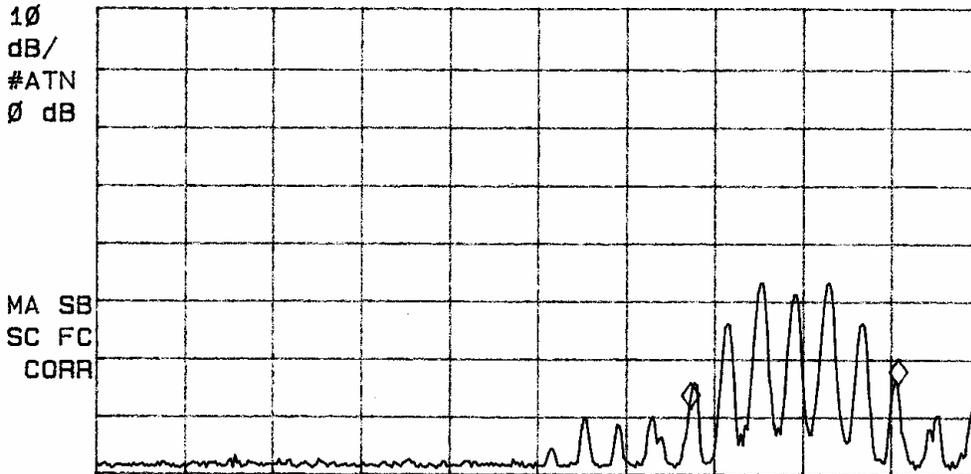

START 107.5000 MHz STOP 108.0000 MHz  
#IF BW 3.0 kHz AVG BW 3 kHz SWP 167 msec

Figure four Band Edges of operation (at 107.9 MHz)





## SUMMARY OF RESULTS

### ***Summary of Results for Radiated Emissions 15.239***

The EUT had a 0.1-dB margin below the limits of 15.239. The radiated emissions for the EUT meet the requirements for FCC CFR 47 Part 15.239 Intentional Radiators. There are no measurable emissions in the restricted bands other than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the FCC Limits.

### ***Statement of Modifications***

No modifications to the EUT were required for the unit to meet the FCC CFR 47 Parts 15B & 15C, Class B Emissions Standards. There were no deviations to the specifications.

## APPENDIX

Model: STREETPILOT 2730

1. Test Equipment List.
2. Rogers Qualifications.
3. FCC Site Approval Letter.

**TEST EQUIPMENT LIST FOR ROGERS LABS, INC.**

The test equipment used is maintained in calibration and good operating condition. Use of this calibrated equipment ensures measurements are traceable to national standards.

<u>List of Test Equipment:</u>	<u>Calibration Date:</u>
Scope: Tektronix 2230	2/05
Wattmeter: Bird 43 with Load Bird 8085	2/05
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140	2/05
H/V Power Supply: Fluke Model: 408B (SN: 573)	2/05
R.F. Generator: HP 606A	2/05
R.F. Generator: HP 8614A	2/05
R.F. Generator: HP 8640B	2/05
Spectrum Analyzer: HP 8562A,	2/05
Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W	
HP Adapters: 11518, 11519, 11520	
Spectrum Analyzer: HP 8591 EM	5/05
Frequency Counter: Leader LDC 825	2/05
Antenna: EMCO Biconilog Model: 3143	5/05
Antenna: EMCO Log Periodic Model: 3147	10/04
Antenna: Antenna Research Biconical Model: BCD 235	10/04
Antenna: EMCO Dipole Set 3121C	2/05
Antenna: C.D. B-101	2/05
Antenna: Solar 9229-1 & 9230-1	2/05
Antenna: EMCO 6509	2/05
Audio Oscillator: H.P. 201CD	2/05
R.F. Power Amp 65W Model: 470-A-1010	2/05
R.F. Power Amp 50W M185- 10-501	2/05
R.F. PreAmp CPPA-102	2/05
LISN 50 µHy/50 ohm/0.1 µf	10/04
LISN Compliance Eng. 240/20	2/05
LISN Fischer Custom Communications FCC-LISN-50-16-2-08	6/05
Peavey Power Amp Model: IPS 801	2/05
Power Amp A.R. Model: 10W 1010M7	2/05
Power Amp EIN Model: A301	2/05
ELGAR Model: 1751	2/05
ELGAR Model: TG 704A-3D	2/05
ESD Test Set 2010i	2/05
Fast Transient Burst Generator Model: EFT/B-101	2/05
Current Probe: Singer CP-105	2/05
Current Probe: Solar 9108-1N	2/05
Field Intensity Meter: EFM-018	2/05
KEYTEK Ecat Surge Generator	2/05
Shielded Room 5 M x 3 M x 3.0 M (101 dB Integrity)	
6/8/2005	

**QUALIFICATIONS**

Of

**SCOT D. ROGERS, ENGINEER**

**ROGERS LABS, INC.**

Mr. Rogers has approximately 16 years experience in the field of electronics. Six years working in the automated controls industry and 6 years working with the design, development and testing of radio communications and electronic equipment.

**POSITIONS HELD:**

Systems Engineer:	A/C Controls Mfg. Co., Inc. 6 Years
Electrical Engineer:	Rogers Consulting Labs, Inc. 5 Years
Electrical Engineer:	Rogers Labs, Inc. Current

**EDUCATIONAL BACKGROUND:**

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.

*Scot D Rogers*

Scot D. Rogers

August 25, 2005

Date

1/11/03

**FEDERAL COMMUNICATIONS COMMISSION****Laboratory Division  
7435 Oakland Mills Road  
Columbia, MD 21046**

August 15, 2003

Registration Number: 90910

Rogers Labs, Inc.  
4405 West 259th Terrace  
Louisburg, KS 66053

Attention: Scot Rogers


Re: Measurement facility located at Louisburg  
3 & 10 meter site  
Date of Renewal: August 15, 2003

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website [www.fcc.gov](http://www.fcc.gov) under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

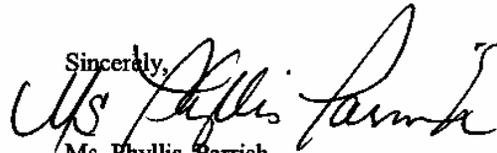Ms. Phyllis Parrish  
Information Technician