

# Application For Grant of Certification

FOR

FOR

Model: M3APGT03

2402-2480 MHz (DTS)

2412-2462 MHz (802.11)

Broadband Digital Transmission System

FCC ID: IPH-02120D

IC: 1792A-02120D


FOR

## Garmin International, Inc.

1200 East 151st Street

Olathe, KS 66062

Test Report Number: 130211 03

Authorized Signatory: 

Scot D. Rogers



# **ROGERS LABS, INC.**

4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone / Fax (913) 837-3214

## Engineering Test Report For Grant of Certification Application

FOR  
CFR 47, PART 15C - Intentional Radiators  
CFR 47 Paragraph 15.247 and  
Industry Canada RSS-210  
License Exempt Intentional Radiator

For

## **Garmin International, Inc.**

1200 East 151st Street  
Olathe, KS 66062

Broadband Digital Transmission System  
Model: M3APGT03  
Frequency Range 2402-2480 MHz  
FCC ID#: IPH-02120D  
IC: 1792A-02120D

Test Date: February 11, 2013

Certifying Engineer: *Scot D. Rogers*  
Scot D. Rogers  
Rogers Labs, Inc.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Telephone/Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory.  
This report must not be used by the client to claim product endorsement by NVLAP, NIST, or  
any agency of the U.S. Government.



# Table Of Contents

**TABLE OF CONTENTS..... 3**

**REVISIONS..... 4**

**FORWARD ..... 5**

**OPINION / INTERPRETATION OF RESULTS ..... 5**

**EQUIPMENT TESTED..... 5**

**EQUIPMENT FUNCTION AND CONFIGURATION..... 6**

    Equipment Configuration.....6

**APPLICATION FOR CERTIFICATION..... 7**

**APPLICABLE STANDARDS & TEST PROCEDURES ..... 8**

**EQUIPMENT TESTING PROCEDURES ..... 8**

**AC Line Conducted Emission Test Procedure .....8**

        Diagram 1 Test arrangement for Conducted emissions .....9

**Radiated Emission Test Procedure.....10**

        Diagram 2 Test arrangement for radiated emissions of tabletop equipment..... 10

        Diagram 3 Test arrangement for radiated emissions tested on Open Area Test Site (OATS)..... 11

**TEST SITE LOCATIONS ..... 12**

**UNITS OF MEASUREMENTS ..... 12**

**ENVIRONMENTAL CONDITIONS..... 12**

**LIST OF TEST EQUIPMENT ..... 13**

**INTENTIONAL RADIATORS..... 14**

**Antenna Requirements .....14**

**Restricted Bands of Operation.....14**

        Table 1 General Radiated Emissions in Restricted Bands Data ..... 14

        Table 2 Harmonic Radiated Emissions in Restricted Bands Data (802.11 mode)..... 15

        Table 3 Harmonic Radiated Emissions in Restricted Bands Data (DTS mode) ..... 16

**Summary of Results for Radiated Emissions in Restricted Bands .....16**



**General Radiated Emissions Procedure.....17**  
 Table 4 General Radiated Emissions from EUT Data (Highest Emissions).....18  
**Summary of Results for General Radiated Emissions .....18**  
**Operation in the Band 2400 – 2483.5 MHz .....19**  
 Figure 1 Plot of Transmitter Emissions (Output in 802.11 B- Mode) .....20  
 Figure 2 Plot of Transmitter Emissions (Output in 802.11 G- Mode).....20  
 Figure 3 Plot of Transmitter Emissions (Output in Operational Band, DTS mode) .....21  
 Figure 4 Plot of Low Band Edge (802.11 B-Mode) .....21  
 Figure 5 Plot of High Band Edge (802.11 B-Mode).....22  
 Figure 6 Plot of Low Band Edge (802.11 G-Mode) .....22  
 Figure 7 Plot of High Band Edge (802.11 G-Mode).....23  
 Figure 8 Plot of Low Band Edge (DTS-Mode) .....23  
 Figure 9 Plot of High Band Edge (DTS-Mode).....24  
**Transmitter Emissions Data.....24**  
 Table 5 Transmitter Antenna Port Power .....24  
 Table 6 Transmitter Radiated Emission (802.11 mode) .....25  
 Table 7 Transmitter Radiated Emission (DTS mode).....26  
 Summary of Results for Transmitter Radiated Emissions of Intentional Radiator .....27  
  
**STATEMENT OF MODIFICATIONS AND DEVIATIONS ..... 27**  
  
**ANNEX..... 28**  
  
 Annex A Measurement Uncertainty Calculations.....29  
 Annex B Rogers Labs Test Equipment List.....30  
 Annex C Rogers Qualifications .....31  
 Annex D FCC Site Registration Letter.....32  
 Annex E Industry Canada Site Registration Letter .....33

## Revisions

Revision 2 Issued April 2, 2013 - corrected type error listing power in Table 5 page 24

Revision 1 Issued March 22, 2013



## Forward

The following information is submitted for consideration in obtaining Grant of Certification for License Exempt Digital Transmission System Intentional Radiator operating under CFR 47 Paragraph 15.247 and Industry Canada RSS-210, operation in the 2400 – 2483.5 MHz band.

Name of Applicant: Garmin International, Inc.  
1200 East 151st Street  
Olathe, KS 66062

Model: M3APGT03

FCC I.D.: IPH-02120D                      Industry Canada ID: 1792A-02120D

Frequency Range: 2402-2480 MHz with power level 0.06 watts and  
2412-2462 MHz with power level 0.094 Watt

## Opinion / Interpretation of Results

Tests Performed	Margin (dB)	Results
Emissions as per CFR 47 paragraphs 2 and 15.205	-0.9	Complies
Emissions as per CFR 47 paragraphs 2 and 15.207	N/A	Complies
Emissions as per CFR 47 paragraphs 2 and 15.209	-0.9	Complies
Harmonic Emissions per CFR 47 15.247	-9.1	Complies
Peak Power Spectral Density per CFR 47 15.247	-6.3	Complies

## Equipment Tested


<u>Equipment</u>	<u>Model / PN</u>	<u>Serial Number</u>
EUT	M3APGT03	385939929b
EUT (#2)	M3APGT03	385938930b
Support Interface	As supplied by Manufacturer	N/A
DC Power supply	1670A	N961313540

Test results in this report relate only to the items tested.

## Equipment Function and Configuration

The EUT is a GPS mapping display and interface system providing interface options for power/data (NMEA 0183) and 8 pin sonar. The completed system offers end user ability to utilize GPS information for display of location and navigational aid. The EUT operates as a Digital Transmission System of two modes, DTS or 802.11B/G. The DTS mode operates in frequency band 2402-2480 MHz with lower power or 802.11B/G mode operating in frequency band 2412-2462 MHz and higher output power. The design utilizes internal fixed antenna system and offers no provision for antenna replacement or modification. The equipment is marketed for use to incorporate a wireless link to exchange data information from one point to another. For testing purposes, the M3APGT03 transceiver was connected to the manufacturer supplied supporting equipment and DC power supply. Manufacturer installed test software offered operational control of the transmitter for testing purposes. The EUT offers single interface port to compliant communications system and equipment, which also provides power. No other interfacing options are provided. For testing purposes, the M3APGT03 received powered from external DC supply powering supporting equipment and was configured to transmit in available data modes. The device is produced with integral antenna system only. The antenna system complies with requirements for unique antenna connection port.

## Equipment Configuration

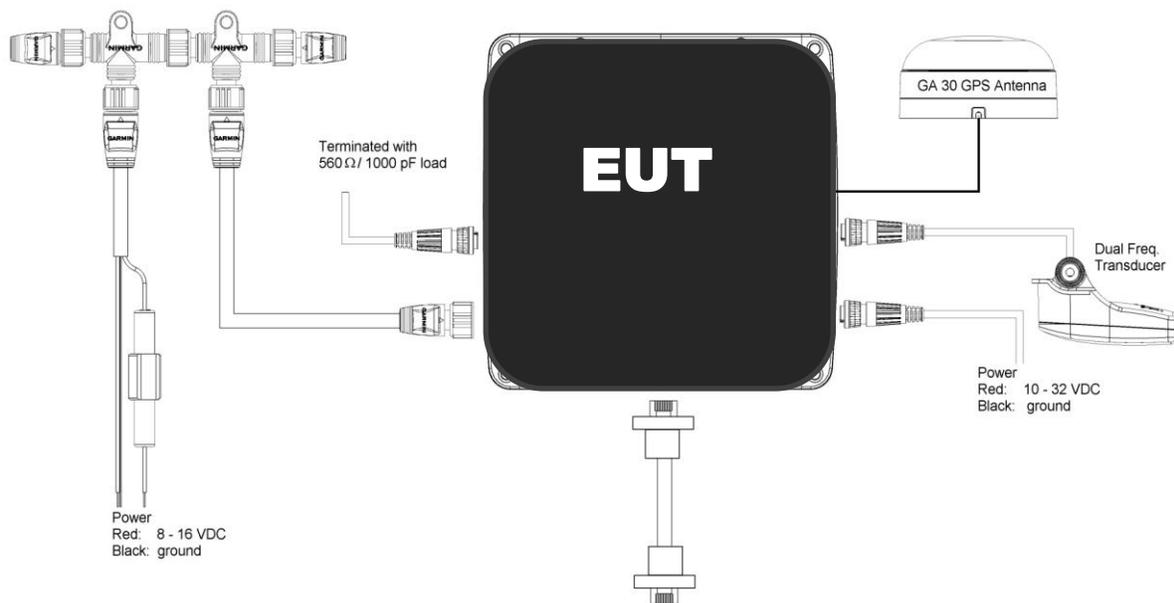



## Application for Certification

- (1) Manufacturer: Garmin International, Inc.  
1200 East 151st Street  
Olathe, KS 66062
  
- (2) Identification: Model: M3APGT03  
FCC I.D.: IPH-02120D IC ID: 1792A-02120D
  
- (3) Instruction Book:  
Refer to Exhibit for Instruction Manual.
  
- (4) Description of Circuit Functions:  
Refer to Exhibit of Operational Description.
  
- (5) Block Diagram with Frequencies:  
Refer to Exhibit of Operational Description.
  
- (6) Report of Measurements:  
Report of measurements follows in this Report.
  
- (7) Photographs: Construction, Component Placement, etc.:  
Refer to Exhibit for photographs of equipment.
  
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from DC power supplied from supporting equipment and installation vehicle only. The EUT offers no other connection ports.
  
- (9) Transition Provisions of CFR47 15.37 are not requested.
  
- (10) Not Applicable. The unit is not a scanning receiver.
  
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
  
- (12) The equipment is not software defined and this section is not applicable.

## Applicable Standards & Test Procedures


In accordance with the Federal Communications Code of Federal Regulations, dated October 1, 2012, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, and applicable parts of paragraph 15, Part 15C Paragraph 15.247, and RSS-210 the following information is submitted. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.4-2009, ANSI C63.10-2009, FCC KDB documents KDB 558074 D01 v02 and KDB 913591. Testing for the AC line-conducted emissions were performed as defined in sections 7 and 13.1.3, testing of the radiated emissions was performed as defined in sections 8 and 13.1.4 of ANSI C63.4-2009. Testing of the radiated emissions was performed as required including procedures in section 13 of ANSI C63.4-2009.

## Equipment Testing Procedures

### *AC Line Conducted Emission Test Procedure*

The EUT operates solely from direct current power and offers no provision for connection to utility AC power systems. Therefore, no AC power line conducted emissions test was required or performed. If required, the manufacturer supplied AC connection would be used to power the EUT. Testing for the AC line-conducted emissions testing would be performed as defined in sections 7 and 13.1.3 of ANSI C63.4-2009. The test setup including the EUT would be arranged in typical equipment configurations and placed on a 1 x 1.5-meter wooden bench, 0.8 meters high located in a screen room. The power lines of the system would be isolated from the power source using a standard LISN with a 50- $\mu$ Hy choke. EMI was coupled to the spectrum analyzer through a 0.1  $\mu$ F capacitor internal to the LISN. The LISN would be positioned on the floor beneath the wooden bench supporting the EUT. The power lines and cables would be draped over the back edge of the table. Refer to diagram 1 showing typical test arrangement and photographs in the test setup exhibits for specific EUT placement during testing.

**Diagram 1 Test arrangement for Conducted emissions**

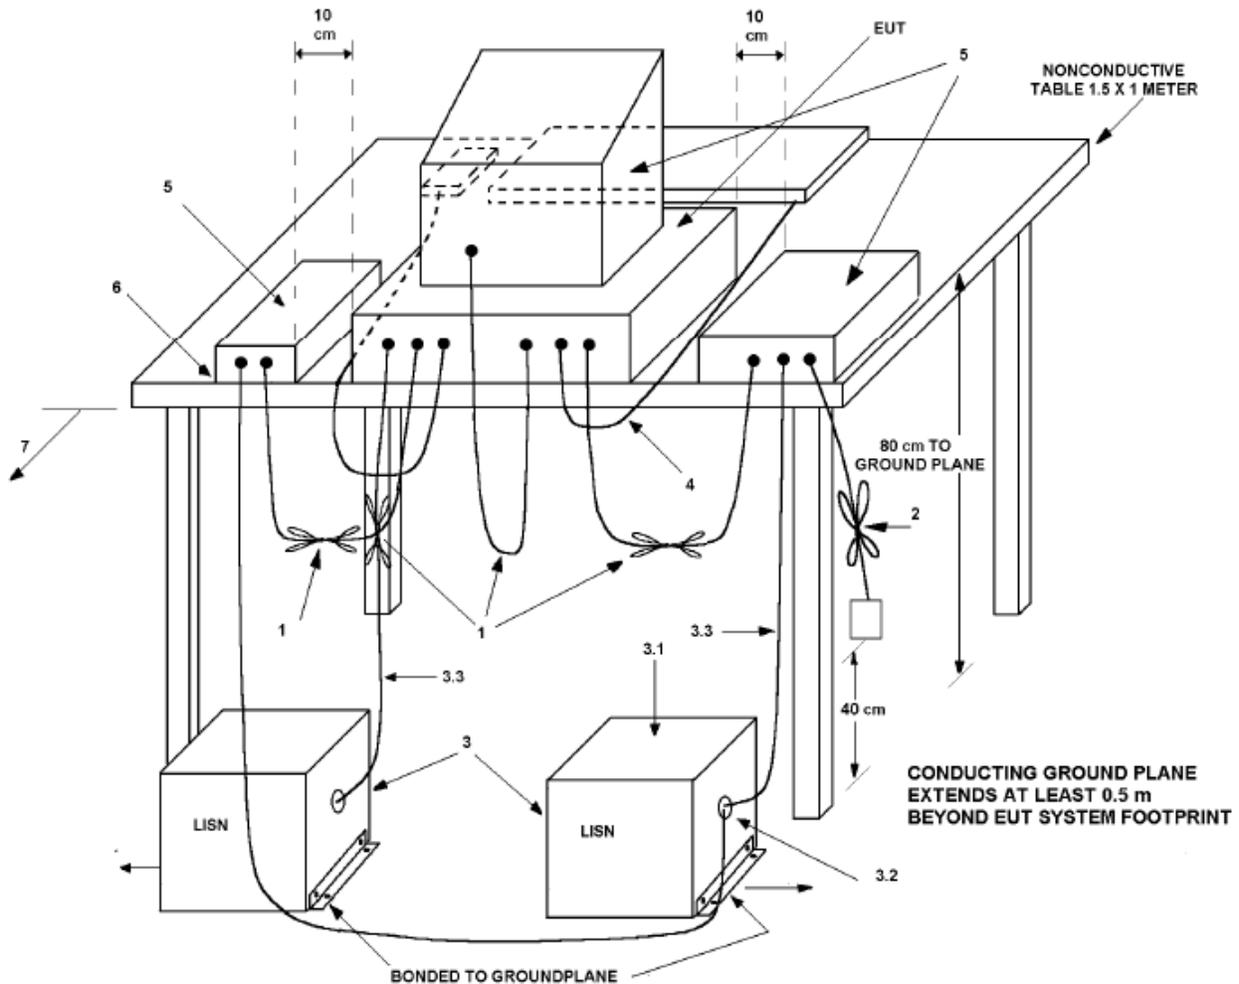


1. Interconnecting cables that hang closer than 40 cm to the ground plane were folded back and forth in the center forming a bundle 30 cm to 40 cm long.
2. Input/output (I/O) cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
3. EUT connected to one LISN. Unused LISN measuring port connectors are terminated into 50  $\Omega$  loads. LISN is placed on top of and bonded to reference ground plane.
  - 3.1 All other equipment powered from additional LISN(s).
  - 3.2 Multiple outlet strips can be used for multiple power cords of non-EUT equipment.
  - 3.3 LISN is positioned at least 80 cm from nearest part of EUT chassis.
4. Cables of hand-operated devices, such as keyboards, mice, and so on, shall be placed as for normal use.
5. Non-EUT components of EUT system being tested.
6. Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
7. Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane (see 5.2.2 for options).

### Radiated Emission Test Procedure

The EUT was placed on a rotating 1 x 1.5-meter wooden platform, 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. Radiated emissions testing was performed as required in CFR47 15, RSS-210 and specified in sections 8 and 13.1.4 of ANSI C63.4-2009. EMI energy was maximized by equipment placement, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken using a spectrum analyzer. The frequency spectrum from 9 kHz to 25,000 MHz was searched for during preliminary investigation. Refer to diagrams 2 and 3 showing typical test arrangement and photographs in the test setup exhibits for specific EUT placement during testing.


**Diagram 2 Test arrangement for radiated emissions of tabletop equipment**

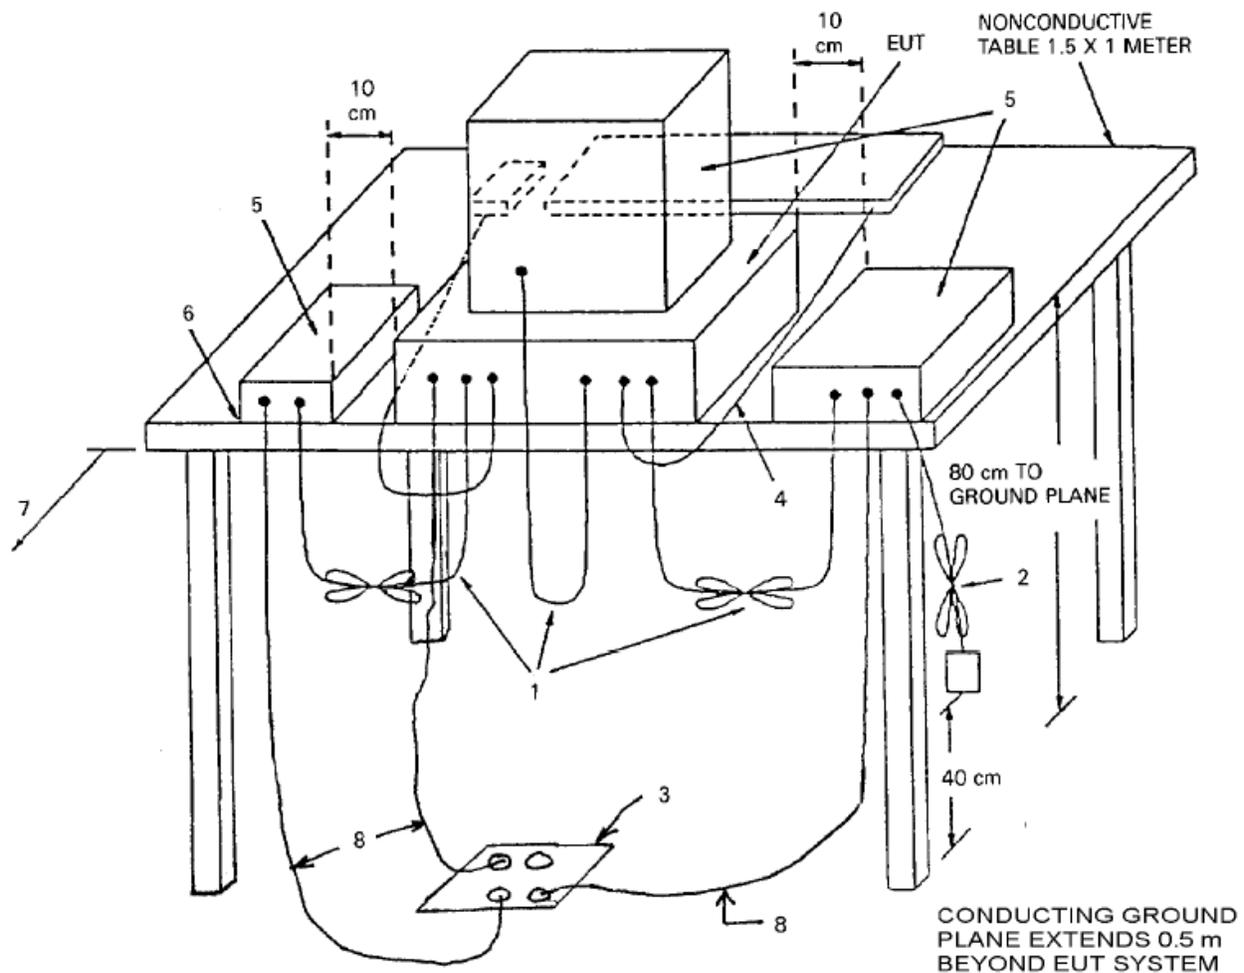

1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center, forming a bundle 30 cm to 40 cm long.

2. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated if required using the correct terminating impedance. The total length shall not exceed 1 m.
3. If LISNs are kept in the test setup for radiated emissions, it is preferred that they be installed under the ground plane with the receptacle flush with the ground plane.
4. Cables of hand-operated devices, such as keyboards, mice, and so on, shall be placed as for normal use.
5. Non-EUT components of EUT system being tested.
6. Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop (possibly center of table for transmitter equipment).
7. No vertical conducting plane used.
8. Power cords drape to the floor and are routed over to receptacle.

**Diagram 3 Test arrangement for radiated emissions tested on Open Area Test Site (OATS)**

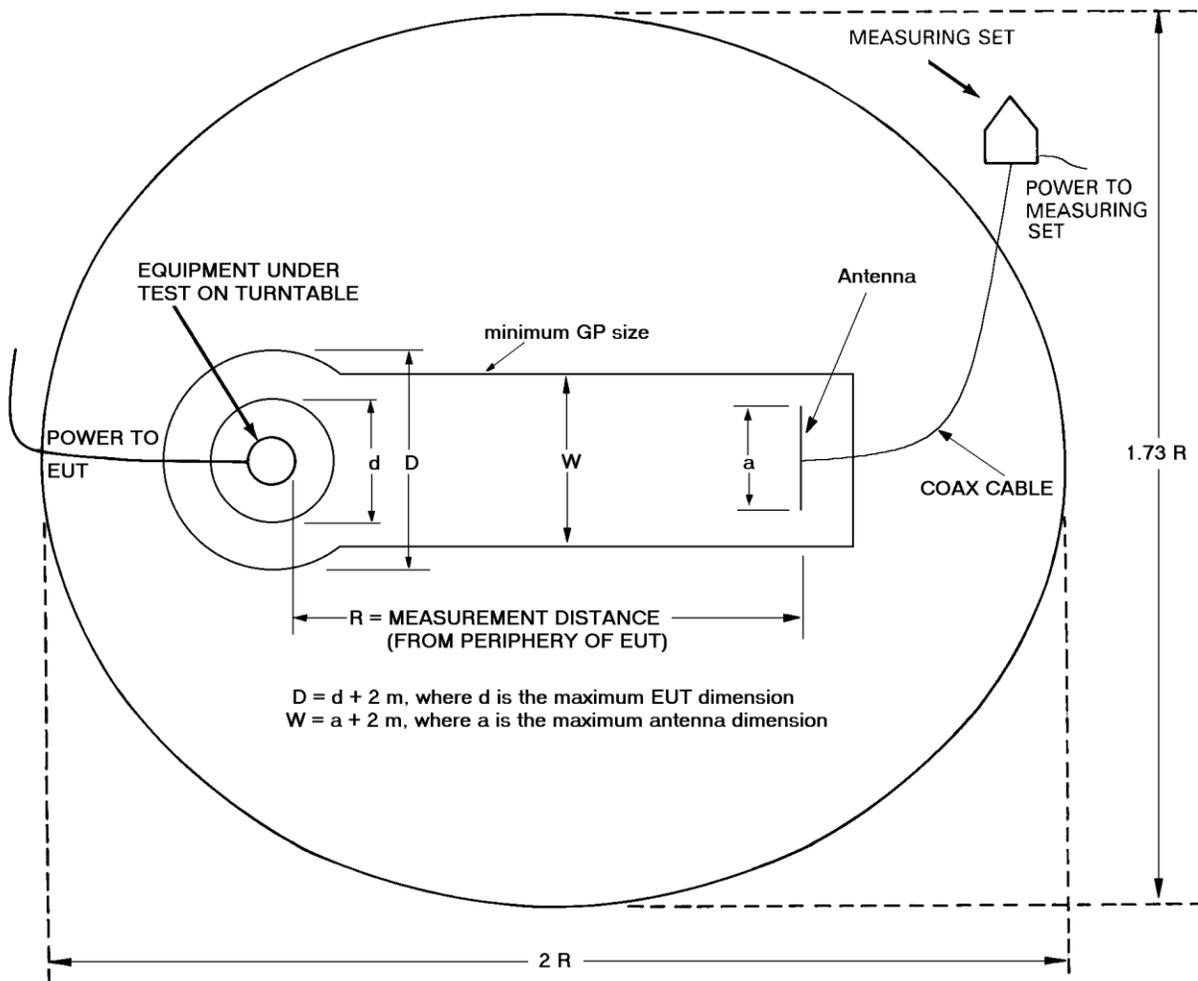

AREA DIMENSIONS =	R = 3m	R = 10 m	R = 30 m
	6 m x 5.2 m	20 m x 17.3 m	60 m x 52 m



## Test Site Locations

- Conducted EMI      The AC power line conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 W. 259<sup>th</sup> Terrace, Louisburg, KS
- Radiated EMI      The radiated emissions tests were performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 W. 259<sup>th</sup> Terrace, Louisburg, KS
- Site Registration      Refer to Annex for Site Registration Letters
- NVLAP Accreditation      Lab code 200087-0

## Units of Measurements

- Conducted EMI      Data is in dB $\mu$ V; dB referenced to one microvolt
- Radiated EMI      Data is in dB $\mu$ V/m; dB/m referenced to one microvolt per meter

### Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured  
 A.F. = Receive antenna factor, Gain = amplification gains and/or cable losses  

$$RFS \text{ (dB}\mu\text{V/m @ 3m)} = FSM \text{ (dB}\mu\text{V)} + A.F. \text{ (dB)} - \text{Gain (dB)}$$

## Environmental Conditions

Ambient Temperature	21.2° C
Relative Humidity	36%
Atmospheric Pressure	1019.6 mb

## List of Test Equipment

A Rohde and Schwarz ESU40 and/or Hewlett Packard 8591EM was used as the measuring device for the emissions testing of frequencies below 1 GHz. A Rohde and Schwarz ESU40 and/or Hewlett Packard 8562A Spectrum Analyzer was used as the measuring device for testing the emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table. Refer to the appendix for a complete list of test equipment.

AC Line Conducted Emissions (0.150 -30 MHz)		
RBW	AVG. BW	Detector Function
9 kHz	30 kHz	Peak / Quasi Peak
Emissions (30-1000 MHz)		
RBW	AVG. BW	Detector Function
120 kHz	300 kHz	Peak / Quasi Peak
Emissions (Above 1000 MHz)		
RBW	Video BW	Detector Function
100 kHz	100 kHz	Peak
1 MHz	1 MHz	Peak / Average

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model</u>	<u>Band</u>	<u>Cal Date</u>	<u>Due</u>
<input type="checkbox"/> LISN	Comp. Design	FCC-LISN-2-MOD.CD	.15-30MHz	10/12	10/13
<input type="checkbox"/> Antenna	ARA	BCD-235-B	20-350MHz	10/12	10/13
<input type="checkbox"/> Antenna	EMCO	3147	200-1000MHz	10/12	10/13
<input checked="" type="checkbox"/> Antenna	Com Power	AH-118	1-18 GHz	10/12	10/13
<input checked="" type="checkbox"/> Antenna	Com Power	AH-840	18-40 GHz	10/12	10/13
<input checked="" type="checkbox"/> Antenna	Standard	FXRY638A	10-18 GHz	3/12	5/13
<input checked="" type="checkbox"/> Antenna	EMCO	6509	.001-30 MHz	10/12	10/13
<input type="checkbox"/> Antenna	EMCO	3143	20-1200 MHz	5/12	5/13
<input checked="" type="checkbox"/> Antenna	Sunol	JB-6	30-1000 MHz	5/12	5/13
<input type="checkbox"/> Analyzer	HP	8591EM	9kHz-1.8GHz	5/12	5/13
<input type="checkbox"/> Analyzer	HP	8562A	9kHz-110GHz	5/12	5/13
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESU40	20Hz-40GHz	5/12	5/13
<input checked="" type="checkbox"/> Amplifier	Com-Power	PA-010	100Hz-30MHz	10/12	10/13
<input checked="" type="checkbox"/> Amplifier	Com-Power	CPPA-102	1-1000 MHz	10/12	10/13
<input checked="" type="checkbox"/> Amplifier	Com-Power	PA-22	0.5-22 GHz	10/12	10/13



## Intentional Radiators

As per CFR47, Subpart C, paragraph 15.247 and RSS-210 the following information is submitted.

### Antenna Requirements

The EUT incorporates integral antenna system and offers no provision for connection to alternate system. The antenna connection point complies with the unique antenna connection requirements. The unique antenna connection requirements are fulfilled. There are no deviations or exceptions to the specification.

### Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at the OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were investigated at the OATS, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI C63.4-2009 paragraphs 13.1 and 8.3.1.2 and KDB 558074 paragraph 10.2 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed emission values take into account the received radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

**Table 1 General Radiated Emissions in Restricted Bands Data**

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Quasi-Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Quasi-Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)
120.0	32.3	30.1	N/A	30.5	28.5	N/A	43.5
168.0	34.0	32.4	N/A	34.4	32.7	N/A	43.5
240.0	46.5	45.1	N/A	43.7	41.9	N/A	46.0
250.0	43.1	41.0	N/A	39.9	36.8	N/A	46.0



**Table 2 Harmonic Radiated Emissions in Restricted Bands Data (802.11 mode)**

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2390.0	48.1	N/A	35.6	50.7	N/A	36.9	54.0
2483.5	52.0	N/A	41.1	47.6	N/A	33.9	54.0
4824.0	47.2	N/A	34.1	47.2	N/A	34.1	54.0
4874.0	46.6	N/A	33.7	46.9	N/A	33.6	54.0
4924.0	45.9	N/A	33.4	46.9	N/A	33.4	54.0
7236.0	46.9	N/A	33.5	46.4	N/A	33.5	54.0
7311.0	47.6	N/A	35.1	48.1	N/A	35.2	54.0
7386.0	46.3	N/A	33.1	45.7	N/A	33.1	54.0
12060.0	49.3	N/A	36.5	48.7	N/A	36.2	54.0
12185.0	48.7	N/A	17.3	48.6	N/A	35.9	54.0
12310.0	47.5	N/A	34.9	48.1	N/A	35.5	54.0
14472.0	55.6	N/A	42.4	55.2	N/A	42.3	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

**Table 3 Harmonic Radiated Emissions in Restricted Bands Data (DTS mode)**

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2390.0	42.1	N/A	29.1	50.7	N/A	29.9	54.0
2483.5	43.7	N/A	30.5	49.6	N/A	36.0	54.0
4804.0	47.4	N/A	34.8	47.1	N/A	34.5	54.0
4882.0	46.3	N/A	33.4	46.9	N/A	33.5	54.0
4960.0	46.6	N/A	33.8	47.8	N/A	33.9	54.0
7206.0	49.9	N/A	36.6	49.9	N/A	36.7	54.0
7323.0	49.0	N/A	35.7	47.7	N/A	34.5	54.0
7440.0	48.4	N/A	35.4	48.0	N/A	35.3	54.0
12010.0	50.0	N/A	36.0	49.0	N/A	36.0	54.0
12205.0	49.3	N/A	36.2	49.2	N/A	36.4	54.0
12400.0	50.6	N/A	37.3	50.0	N/A	37.0	54.0
2390.0	42.1	N/A	29.1	50.7	N/A	29.9	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

**Summary of Results for Radiated Emissions in Restricted Bands**

The EUT demonstrated compliance with the radiated emissions requirements of CFR 47 Part 15C and RSS-210 Intentional Radiators. The EUT demonstrated a worst-case minimum margin of -0.9 dB below the radiated emissions requirements in restricted frequency bands. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.



### **General Radiated Emissions Procedure**

The EUT was arranged in a typical equipment configuration and operated through all available modes with worst-case data recorded. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Each radiated emission was then maximized at the OATS location before final radiated emissions measurements were performed. Final data was taken with the EUT located at the OATS at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 9 kHz to 25,000 MHz was searched for general radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Loop from 9 kHz to 30 MHz, Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 1 GHz and or double Ridge or pyramidal horns and mixers from 1 GHz to 40 GHz, notch filters and appropriate amplifiers and external mixers were utilized.

**Table 4 General Radiated Emissions from EUT Data (Highest Emissions)**

Frequency in MHz	Horizontal Peak (dB $\mu$ V/m)	Horizontal Quasi-Peak (dB $\mu$ V/m)	Horizontal Average (dB $\mu$ V/m)	Vertical Peak (dB $\mu$ V/m)	Vertical Quasi-Peak (dB $\mu$ V/m)	Vertical Average (dB $\mu$ V/m)	Limit @ 3m (dB $\mu$ V/m)
72.0	27.3	23.6	N/A	24.2	20.3	N/A	40.0
120.0	32.3	30.1	N/A	30.5	28.5	N/A	43.5
144.0	39.5	38.3	N/A	38.2	36.6	N/A	43.5
168.0	34.0	32.4	N/A	34.4	32.7	N/A	43.5
192.0	35.3	33.6	N/A	35.2	33.6	N/A	43.5
216.0	44.4	44.1	N/A	44.0	42.8	N/A	46.0
240.0	46.5	45.1	N/A	43.7	41.9	N/A	46.0
250.0	43.1	41.0	N/A	39.9	36.8	N/A	46.0
312.0	42.0	39.6	N/A	40.3	39.5	N/A	46.0
360.0	44.8	43.0	N/A	41.5	40.2	N/A	46.0
384.0	37.0	35.6	N/A	37.1	35.0	N/A	46.0
432.0	41.0	38.7	N/A	34.2	31.3	N/A	46.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

**Summary of Results for General Radiated Emissions**

The EUT demonstrated compliance with the radiated emissions requirements of CFR47 Part 15C paragraph 15.209 and RSS-210 Intentional Radiators. The EUT demonstrated a minimum margin of -0.9 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

### **Operation in the Band 2400 – 2483.5 MHz**

The power output was measured at the open area test site at a three-meter distance. The EUT was placed on a wooden turntable 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. The peak and quasi-peak amplitude of the frequencies below 1000 MHz were measured using a spectrum analyzer. The peak and average amplitude of emissions above 1000 MHz including were measured using a spectrum analyzer. Emissions data was recorded from the measurement results. Plots were made of transmitter performance for reference purposes. Refer to figures one through seven showing plots taken of the EUT performance displaying compliance with the specifications.

This product utilizes permanently attached antenna system and offers no provision for conducted antenna port measurements. Test procedures as defined in publications KDB 558074 and ANSI C63.10-2009 were utilized for compliance testing. These procedures utilize measurement of maximum field strength and conversion calculation for comparison with requirements.

1. Calculate the transmitter's peak power using the following equation:

$$P = (E * d)^2 / (30 * G)$$

Where: E = the measured maximum field strength in V/m.

G = the numeric gain of the transmitting antenna over an isotropic radiator.

d = the distance in meters from which the field strength was measured.

P = the power in watts

Setting the RBW > 6dB bandwidth of the emission or using a peak power meter

Power measurements were conducted utilizing the channel power measurement function of the ESU40 receiver.

2. Emission Bandwidth was measured in compliance with KDB 558074 paragraph 7.
3. Maximum Peak Output Power was measured in compliance with KDB 558074 paragraph 8.
4. Maximum Power Spectral Density was measured in compliance with KDB 558074 paragraph 9.
5. Maximum Unwanted Emissions Levels were measured in compliance with KDB 558074 and CFR47 paragraph 15C at 3-meters distance located on the OATS.
6. Band Edge compliance was performed in compliance with KDB 913591.

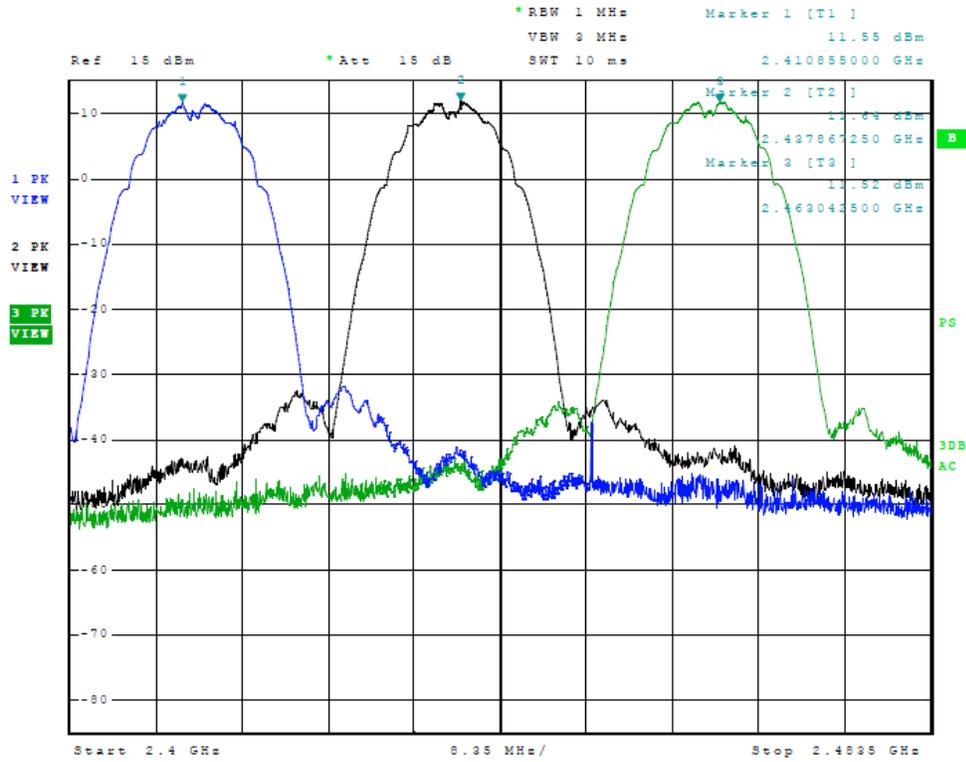


Figure 1 Plot of Transmitter Emissions (Output in 802.11 B- Mode)



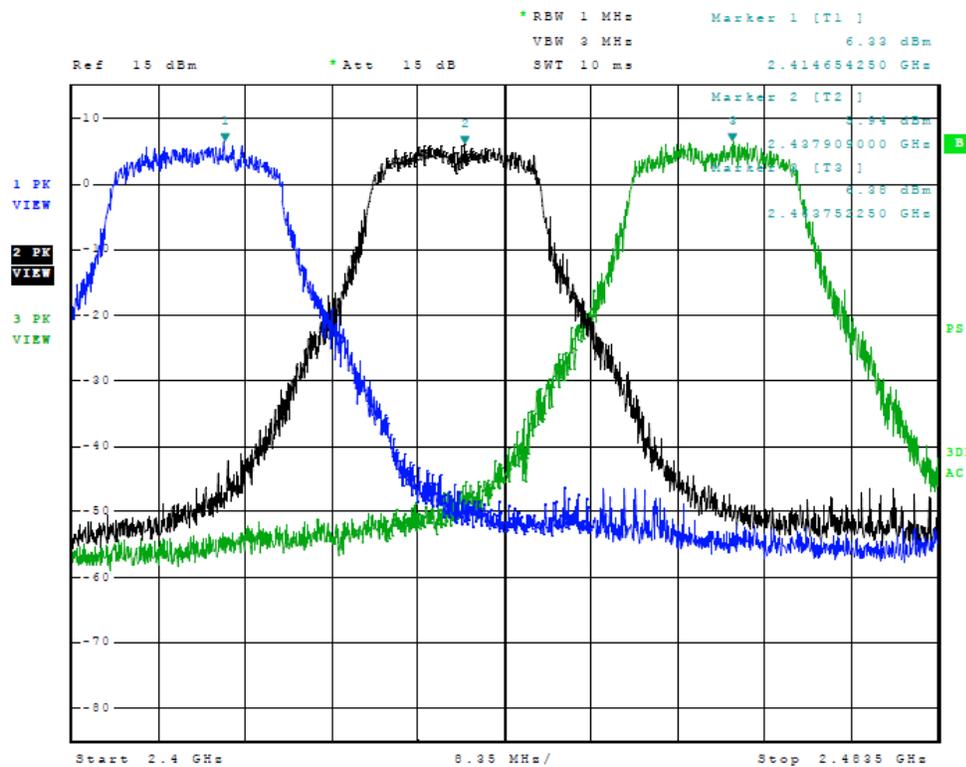


Figure 2 Plot of Transmitter Emissions (Output in 802.11 G- Mode)

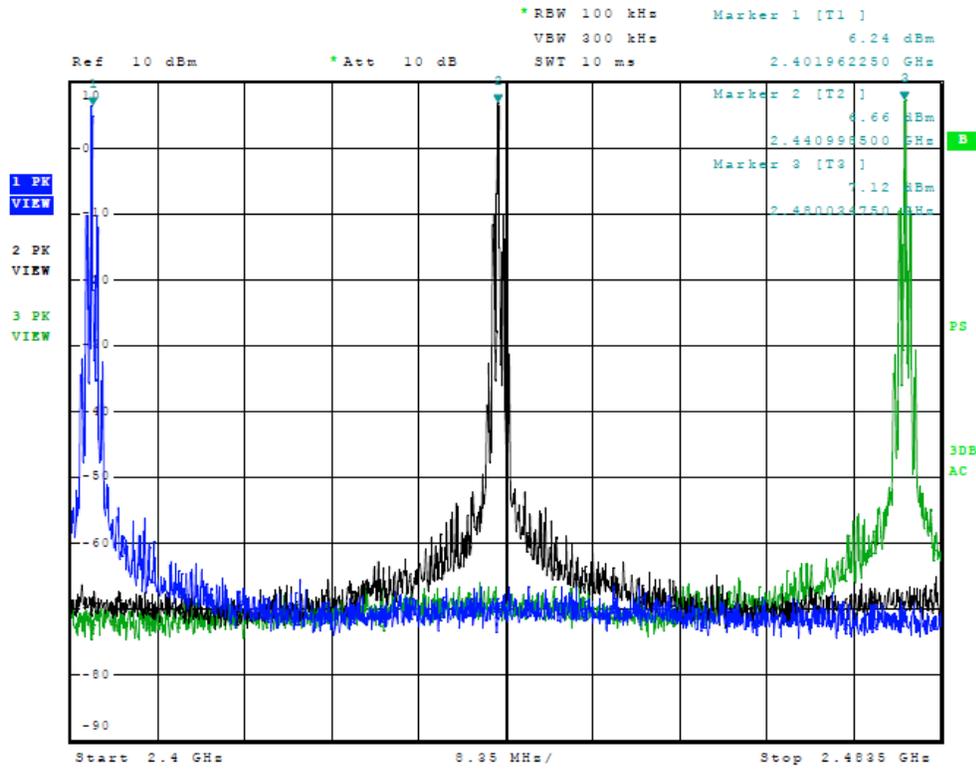


**Figure 3 Plot of Transmitter Emissions (Output in Operational Band, DTS mode)**

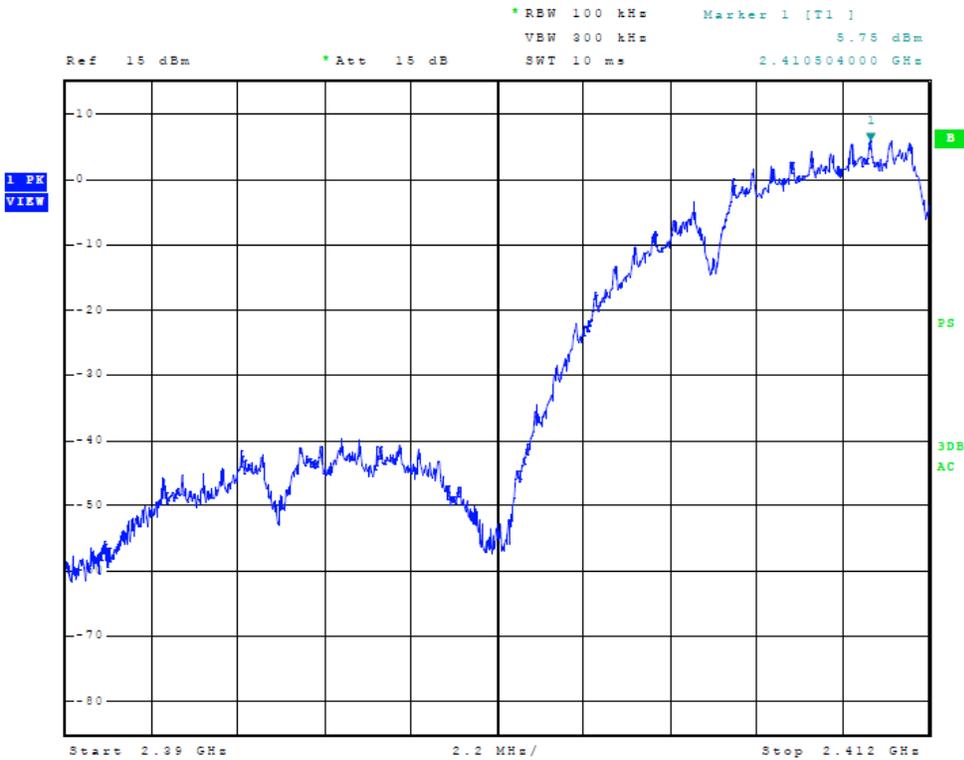


**Figure 4 Plot of Low Band Edge (802.11 B-Mode)**




**Figure 5 Plot of High Band Edge (802.11 B-Mode)**

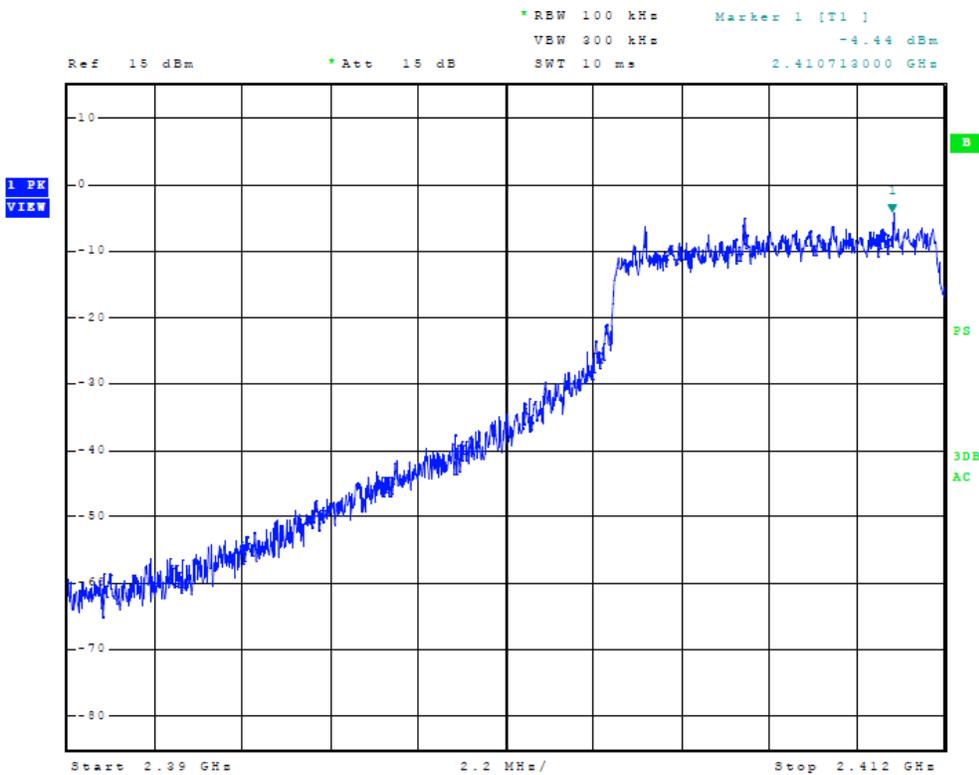


**Figure 6 Plot of Low Band Edge (802.11 G-Mode)**

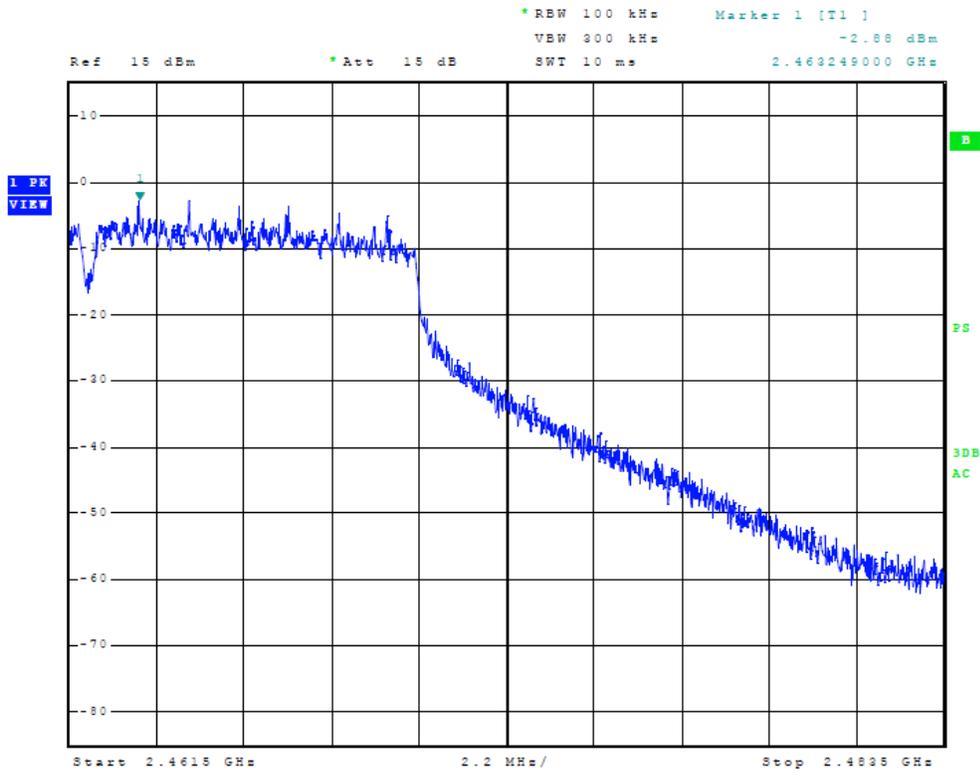

**Figure 7 Plot of High Band Edge (802.11 G-Mode)**

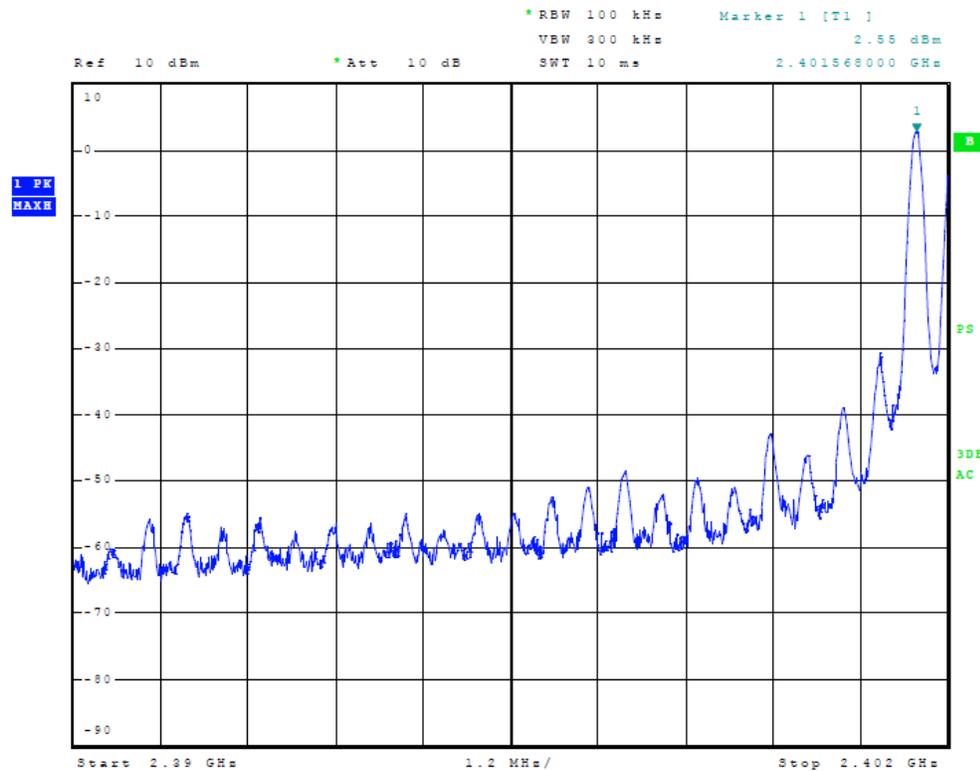

**Figure 8 Plot of Low Band Edge (DTS-Mode)**

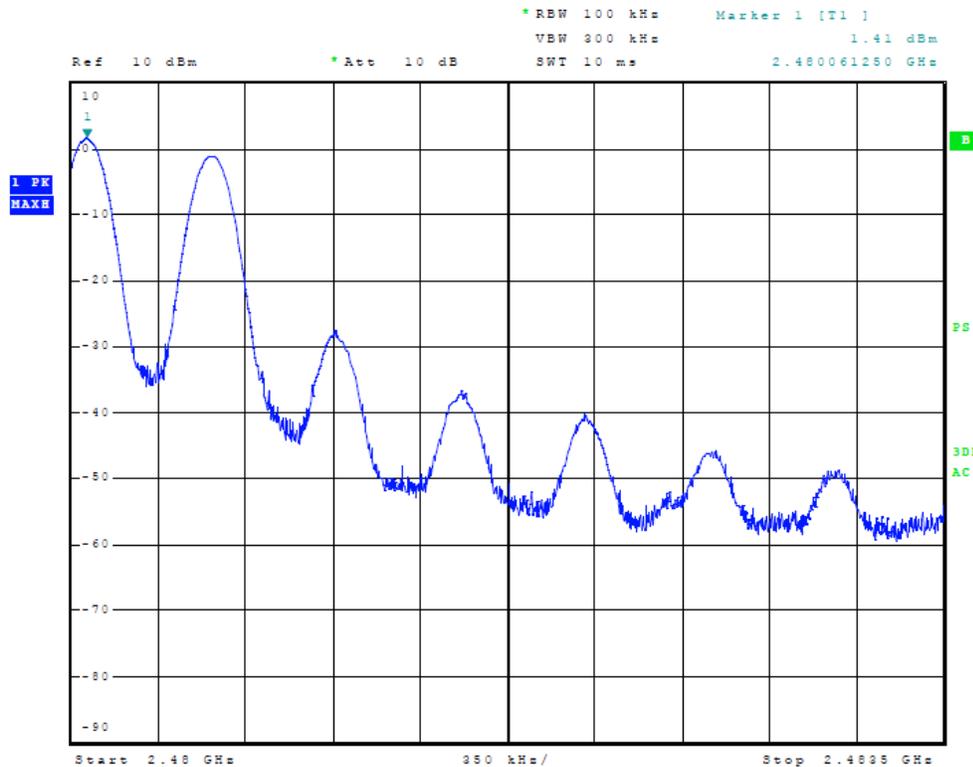

**Figure 9 Plot of High Band Edge (DTS-Mode)**

**Transmitter Emissions Data**

**Table 5 Transmitter Antenna Port Power**

Frequency MHz	Conducted Antenna Port Output Power (Watts)	Occupied Bandwidth (kHz)	Power Spectral Density (dBm)
802.11 B-Mode			
2412	0.085	15,300	-3.13
2437	0.084	15,300	-2.00
2462	0.094	15,300	-0.73
802.11 G-Mode			
2412	0.042	16,710	-13.56
2437	0.042	16,740	-14.00
2462	0.044	16,725	-14.09
DTS-Mode			
2402	0.04	1,120	1.32
2441	0.05	1,120	1.38
2480	0.06	1,120	1.69

**Table 6 Transmitter Radiated Emission (802.11 mode)**

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)
2412.0	--	--	--	--	--
4824.0	47.2	34.1	47.2	34.1	54.0
7236.0	46.9	33.5	46.4	33.5	54.0
9648.0	50.8	37.9	51.1	37.8	54.0
12060.0	49.3	36.5	48.7	36.2	54.0
14472.0	55.6	42.4	55.2	42.3	54.0
16884.0	49.9	37.2	50.0	37.3	54.0
2437.0	--	--	--	--	--
4874.0	47.2	34.1	47.2	34.1	54.0
7311.0	46.9	33.5	46.4	33.5	54.0
9748.0	50.8	37.9	51.1	37.8	54.0
12185.0	49.3	36.5	48.7	36.2	54.0
14622.0	55.6	42.4	55.2	42.3	54.0
17059.0	49.9	37.2	50.0	37.3	54.0
2462.0	--	--	--	--	--
4924.0	45.9	33.4	46.9	33.4	54.0
7386.0	46.3	33.1	45.7	33.1	54.0
9848.0	51.1	37.8	50.8	38.0	54.0
12310.0	47.5	34.9	48.1	35.5	54.0
14772.0	55.9	43.1	56.6	43.2	54.0
17234.0	54.3	41.6	54.4	41.6	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

**Table 7 Transmitter Radiated Emission (DTS mode)**

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2402.0	--	--	--	--	--
4804.0	47.4	34.8	47.1	34.5	54.0
7206.0	49.9	36.6	49.9	36.7	54.0
9608.0	50.8	37.3	50.5	37.6	54.0
12010.0	50.0	36.0	49.0	36.0	54.0
14412.0	55.7	43.1	55.7	43.0	54.0
16814.0	49.8	36.9	50.0	37.4	54.0
2441.0	--	--	--	--	--
4882.0	46.3	33.4	46.9	33.5	54.0
7323.0	49.0	35.7	47.7	34.5	54.0
9764.0	50.9	37.9	51.4	38.4	54.0
12205.0	49.3	36.2	49.2	36.4	54.0
14646.0	57.7	44.6	57.7	44.9	54.0
17087.0	52.5	39.3	52.2	39.3	54.0
2480.0	--	--	--	--	--
4960.0	46.6	33.8	47.8	33.9	54.0
7440.0	48.4	35.4	48.0	35.3	54.0
9920.0	50.3	37.5	50.0	36.9	54.0
12400.0	50.6	37.3	50.0	37.0	54.0
14880.0	55.1	41.9	54.4	41.7	54.0
17360.0	54.9	42.2	55.2	42.2	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.



## Summary of Results for Transmitter Radiated Emissions of Intentional Radiator

The EUT demonstrated compliance with the radiated emissions requirements of CFR47 Part 15.247 and RSS-210 Digital Transmission Systems. Measured Peak conducted power of 19.72 dBm, 0.938 Watts for operation in 2412-2462 MHz and 7.19 dBm, 0.05 watts for operation in 2402-2480 MHz band. The peak power spectral density presented a minimum margin of -6.1 dB below the requirements. The EUT demonstrated a minimum margin of -9.1 dB below the harmonic emissions requirements. There were no other significantly measurable emissions in the restricted bands other than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the requirements. There were no other deviations or exceptions to the requirements.

## Statement of Modifications and Deviations

No modifications to the EUT were required for the unit to demonstrate compliance with the CFR47 Part 15C and RSS-210 emission requirements. There were no deviations to the specifications.



NVLAP Lab Code 200087-0

## Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Rogers Labs Test Equipment List
- Annex C Rogers Qualifications
- Annex D FCC Site Registration Letter
- Annex E Industry Canada Site Registration Letter

**Annex A Measurement Uncertainty Calculations**

Measurement uncertainty calculations were made for the laboratory. Result of measurement uncertainty calculations are recorded below for AC line conducted and radiated emission measurements.

Measurement Uncertainty	$U_{(E)}$	$U_{(lab)}$
3 Meter Horizontal 30-200 MHz Measurements	2.08	4.16
3 Meter Vertical 30-200 MHz Measurements	2.16	4.33
3 Meter Vertical Measurements 200-1000 MHz	2.99	5.97
10 Meter Horizontal Measurements 30-200 MHz	2.07	4.15
10 Meter Vertical Measurements 30-200 MHz	2.06	4.13
10 Meter Horizontal Measurements 200-1000 MHz	2.32	4.64
10 Meter Vertical Measurements 200-1000 MHz	2.33	4.66
3 Meter Measurements 1-6 GHz	2.57	5.14
3 Meter Measurements 6-18 GHz	2.58	5.16
AC Line Conducted	1.72	3.43



**Annex B Rogers Labs Test Equipment List**

List of Test Equipment	Calibration Date
Spectrum Analyzer: Rohde & Schwarz ESU40	5/12
Spectrum Analyzer: HP 8562A, HP Adapters: 11518, 11519, and 11520 Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W	5/12
Spectrum Analyzer: HP 8591EM	5/12
Antenna: EMCO Biconilog Model: 3143	5/12
Antenna: Sunol Biconilog Model: JB6	10/12
Antenna: EMCO Log Periodic Model: 3147	10/12
Antenna: Com Power Model: AH-118	10/12
Antenna: Com Power Model: AH-840	10/12
Antenna: Antenna Research Biconical Model: BCD 235	10/12
LISN: Compliance Design Model: FCC-LISN-2.Mod.cd, 50 µHy/50 ohm/0.1 µf	10/12
R.F. Preamp CPPA-102	10/12
Attenuator: HP Model: HP11509A	10/12
Attenuator: Mini Circuits Model: CAT-3	10/12
Attenuator: Mini Circuits Model: CAT-3	10/12
Cable: Belden RG-58 (L1)	10/12
Cable: Belden RG-58 (L2)	10/12
Cable: Belden 8268 (L3)	10/12
Cable: Time Microwave: 4M-750HF290-750	10/12
Cable: Time Microwave: 10M-750HF290-750	10/12
Frequency Counter: Leader LDC825	2/13
Oscilloscope Scope: Tektronix 2230	2/13
Wattmeter: Bird 43 with Load Bird 8085	2/13
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140	2/13
R.F. Generators: HP 606A, HP 8614A, HP 8640B	2/13
R.F. Power Amp 65W Model: 470-A-1010	2/13
R.F. Power Amp 50W M185- 10-501	2/13
R.F. Power Amp A.R. Model: 10W 1010M7	2/13
R.F. Power Amp EIN Model: A301	2/13
LISN: Compliance Eng. Model 240/20	2/13
LISN: Fischer Custom Communications Model: FCC-LISN-50-16-2-08	2/13
Antenna: EMCO Dipole Set 3121C	2/13
Antenna: C.D. B-101	2/13
Antenna: Solar 9229-1 & 9230-1	2/13
Antenna: EMCO 6509	10/12
Audio Oscillator: H.P. 201CD	2/13
ELGAR Model: 1751	2/13
ELGAR Model: TG 704A-3D	2/13
ESD Test Set 2010i	2/13
Fast Transient Burst Generator Model: EFT/B-101	2/13
Field Intensity Meter: EFM-018	2/13
KEYTEK Ecat Surge Generator	2/13
Shielded Room 5 M x 3 M x 3.0 M	



## **Annex C Rogers Qualifications**

***Scot D. Rogers, Engineer***

### **Rogers Labs, Inc.**

Mr. Rogers has approximately 17 years experience in the field of electronics. Engineering experience includes six years in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

#### Positions Held

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

#### Educational Background

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.

Scot D. Rogers



NVLAP Lab Code 200087-0

**Annex D FCC Site Registration Letter**

**FEDERAL COMMUNICATIONS COMMISSION**

**Laboratory Division  
7435 Oakland Mills Road  
Columbia, MD 21046**

November 01, 2011

Registration Number: 90910

Rogers Labs, Inc.  
4405 West 259th Terrace,  
Louisburg, KS 66053

Attention: Scot Rogers,

Re: Measurement facility located at Louisburg  
3 & 10 meter site  
Date of Renewal: November 01, 2011

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website [www.fcc.gov](http://www.fcc.gov) under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

Phyllis Parrish  
Industry Analyst


Rogers Labs, Inc.  
4405 W. 259th Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 2

Garmin International, Inc.  
Model: M3APGT03 SN: 3859389296b FCC ID#: IPH-02120D  
Test #: 130211 03 IC: 1792A-02120D  
Test to: CFR47 (15.247), RSS-210 (DTS) Date: April 2, 2013  
File: Garmin M3APGT03 DTS TstRpt 130211 03r2 Page 32 of 33



NVLAP Lab Code 200087-0

## Annex E Industry Canada Site Registration Letter



December 28, 2011

OUR FILE: 46405-3041  
Submission No: 152685

Rogers Labs Inc.  
4405 West 259th Terrance  
Louisburg, KS, 66053  
USA

**Attention:** Mr. Scot D. Rogers

Dear Sir/Madame:

The Bureau has received your application for the renewal of 3/10m OATS. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought ( **Site# 3041A-1** ). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please keep for your records the following information;

- The company address code associated to the site(s) located at the above address is: **3041A**

Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2003 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2003 or later shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 metre OATS or 3 metre chamber). If the test facility is not accredited to ANSI C63.4-2003 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to **exceed three years**. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL;  
[http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h\\_tt00052e.html](http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h_tt00052e.html).

If you have any questions, you may contact the Bureau by e-mail at [certification.bureau@ic.gc.ca](mailto:certification.bureau@ic.gc.ca) Please reference our file and submission number above for all correspondence.

Yours sincerely,

Dalwinder Gill  
For: Wireless Laboratory Manager  
**Certification and Engineering Bureau**  
3701 Carling Ave., Building 94  
P.O. Box 11490, Station "H"  
Ottawa, Ontario K2H 8S2  
Email: [dalwinder.gill@ic.gc.ca](mailto:dalwinder.gill@ic.gc.ca)  
Tel. No. (613) 998-8363  
Fax. No. (613) 990-4752

Rogers Labs, Inc.  
4405 W. 259th Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 2

Garmin International, Inc.  
Model: M3APGT03 SN: 3859389296b FCC ID#: IPH-02120D  
Test #: 130211 03 IC: 1792A-02120D  
Test to: CFR47 (15.247), RSS-210 (DTS) Date: April 2, 2013  
File: Garmin M3APGT03 DTS TstRpt 130211 03r2 Page 33 of 33