

FCC/ISED Test Report

Prepared for: Garmin International Inc.

Address: 1200 E. 151st Street
Olathe, Kansas, 66062, USA

Product: A03473

Test Report No: R20181107-20-04B

Approved By:



Nic S. Johnson, NCE

Technical Manager

iNARTE Certified EMC Engineer #EMC-003337-NE

DATE: 5 June 2019

Total Pages: 44

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.



	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

REVISION PAGE

Rev. No.	Date	Description
0	16 May 2019	Original – NJohnson Prepared by KVepuri/CFarrington
A	5 June 2019	Updated calibration table. Includes NCEE Labs report R20181107-20-04 and its amendment in full. -NJ
B	5 June 2019	Removed irrelevant note from Page 16. Includes NCEE Labs report R20181107-20-04A and its amendment in full. -NJ

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

CONTENTS

Revision Page.....	2
1.0 Summary of test results.....	3
2.0 EUT Description	5
2.1 Equipment under test.....	5
2.2 Description of test modes	6
2.3 Description of support units	7
Laboratory description	7
3.1 Laboratory description	7
3.2 Test Personnel	7
3.0	8
4.0 Detailed results	9
4.1 Duty Cycle	9
4.2 Radiated emissions	10
4.3 Peak Output Power	17
4.4 Bandwidth	23
4.5 Bandedges	31
4.6 Power Spectral Density	37
Appendix A: Sample Calculation	41
Appendix B – Measurement Uncertainty	43
REPORT END.....	44

1.0 SUMMARY OF TEST RESULTS

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

The worst-case measurements were reported in this report. The EUT has been tested according to the following specifications:

APPLIED STANDARDS AND REGULATIONS		
Standard Section	Test Type	Result
FCC Part 15.35 RSS Gen, Issue 4, Section 6.10	Duty Cycle	Pass
FCC Part 15.247(a)(1) RSS-247 Issue 2 Section 5.2	Peak output power	Pass
FCC Part 15.247(a)(1) RSS-247 Issue 2 Section 5.2	Bandwidth	Pass
FCC Part 15.209 RSS-Gen Issue 4, Section 7.1	Receiver Radiated Emissions	Pass
FCC Part 15.209 (restricted bands), 15.247 (unrestricted) RSS-247 Issue 2 Section 5.5, RSS-Gen Issue 4, Section 8.9	Transmitter Radiated Emissions	Pass
FCC Part 15.247(a)(1) RSS-247 Issue 2 Section 5.2	Power Spectral Density	Pass
FCC Part 15.209, 15.247(d) RSS-247 Issue 2 Section 11.13	Band Edge Measurement	Pass
FCC Part 15.207 RSS-Gen Issue 4, Section 7.1	Conducted Emissions	NA

See Section 4 for details on the test methods used for each test.

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

2.0 EUT DESCRIPTION

2.1 EQUIPMENT UNDER TEST

The Equipment Under Test (EUT) was a wireless device from Garmin. It features GFSK module and has transmit and receives capabilities

EUT	A03473
EUT Received	20 December 2018
EUT Tested	20 December 2018 - 16 May 2019
Serial No.	5R8000034
Operating Band	2400.0 - 2483.5 GHz
Device Type	GFSK
Antenna	Trace Antenna
Power Supply	10-45VDC, or Two AA batteries No connection to AC mains, battery only.

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

2.2 DESCRIPTION OF TEST MODES

The EUT operates on, and was tested at the frequencies below:

Channel	Frequency
Low (Channel 1)	2402
Middle (Channel 6)	2440
High (Channel 11)	2480

These are the only three representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequency and designations.

This EUT was set to transmit in a worse-case scenario with modulation on. The manufacturer modified the unit to transmit continuously on the lowest, highest and one channel in the middle.

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

2.3 DESCRIPTION OF SUPPORT UNITS

NA

3.0 LABORATORY DESCRIPTION

3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
 4740 Discovery Drive
 Lincoln, NE 68521

A2LA Certificate Number:	1953.01
FCC Accredited Test Site Designation No:	US1060
Industry Canada Test Site Registration No:	4294A-1
NCC CAB Identification No:	US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of $35 \pm 4\%$
 Temperature of $22 \pm 3^{\circ}$ Celsius

3.2 TEST PERSONNEL

All testing was performed by Karthik Vepuri of NCEE Labs. The results were reviewed by Nic Johnson.

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

3.3 TEST EQUIPMENT

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Rohde & Schwarz Test Receiver	ES126	100037	30 Jan 2018	30 Jan 2020
EMCO Biconilog Antenna	3142B	1647	02 Aug 2017	02 Aug 2019
EMCO Horn Antenna	3115	6416	26 Jan 2018	26 Jan 2020
EMCO Horn Antenna	3116	2576	31 Jan 2018	31 Jan 2020
Rohde & Schwarz Preamplifier	TS-PR18	3545700803	09 Mar 2018*	09 Mar 2020*
Trilithic High Pass Filter	6HC330	23042	09 Mar 2018*	09 Mar 2020*
Rohde & Schwarz LISN	ESH3-Z5	836679/010	26 Jul 2018	26 Jul 2019
RF Cable (preamplifier to antenna)	MFR-57500	01-07-002	09 Mar 2018*	09 Mar 2020*
RF Cable (antenna to 10m chamber bulkhead)	FSCM 64639	01E3872	09 Mar 2018*	09 Mar 2020*
RF Cable (10m chamber bulkhead to control room bulkhead)	FSCM 64639	01E3874	09 Mar 2018*	09 Mar 2020*
RF Cable (Control room bulkhead to RF switch)	FSCM 64639	01E3871	09 Mar 2018*	09 Mar 2020*
RF Cable (RF switch to test receiver)	FSCM 64639	01F1206	09 Mar 2018*	09 Mar 2020*
RF switch – Rohde and Schwarz	TS-RSP	1113.5503.14	09 Mar 2018*	09 Mar 2020*
N connector bulkhead (10m chamber)	PE9128	NCEEBH1	09 Mar 2018*	09 Mar 2020*
N connector bulkhead (control room)	PE9128	NCEEBH2	09 Mar 2018*	09 Mar 2020*

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

4.0 DETAILED RESULTS

4.1 DUTY CYCLE

NA

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

4.2 RADIATED EMISSIONS

Test Method: ANSI C63.10-2013:

1. Section 6.5, "Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz"
2. Section 6.6, "Radiated emissions from unlicensed wireless devices above 1 GHz"
3. Section 11.11, "Measurement in unrestricted frequency bands"
4. Section 11.12, "Emissions in restricted bands"

Limits for radiated emissions measurements:

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH (μV/m)	MEASUREMENT DISTANCE (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note about requirement from FCC Part 15.247(d) and RSS-247, Section 5.5:

In addition to the limits shown above, all emissions were also required to be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. All measurements were performed with a 1 MHz bandwidth, but the bandwidth conversion from 1 MHz to 100 kHz would be equally applied to the highest emission and the spurious emissions, so it would not affect the delta measurement.

Since the fundamental emissions was at least 20 dB over the spurious emissions limits from 15.209 and all spurious emissions were below the 15.209 limit, this requirement was met.

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 * log * Emission level (μV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

Test procedures:

- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1Ghz and 1.5m for measurements from 1GHz and higher.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. BLE mode was tested. All final measurements were performed with the EUT transmitting continuously in this mode.

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz. A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

Deviations from test standard:

No deviation.

Test setup:

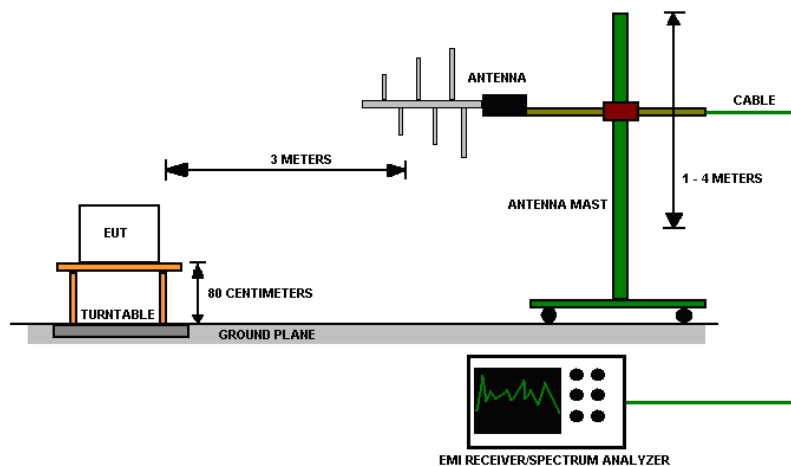


Figure 1 - Radiated Emissions Test Setup

EUT operating conditions

The EUT was powered by a 12V Battery unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range. EUT was set to transmit in GFSK.

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

Test results:

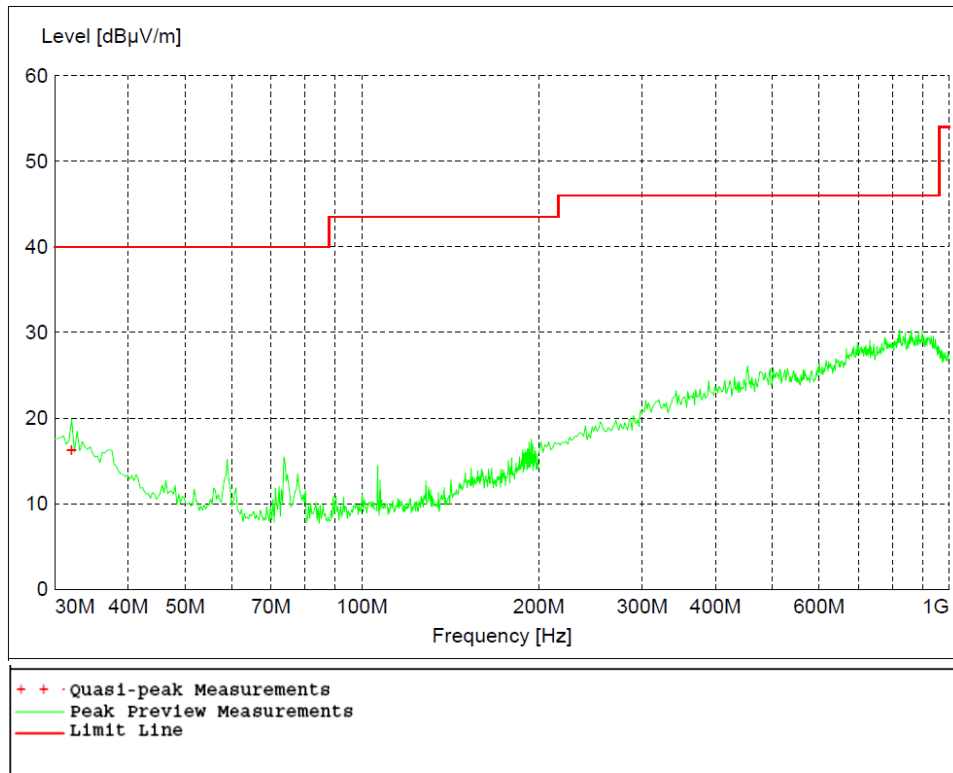


Figure 2 - Radiated Emissions Plot, Receive

Table 1 - Radiated Emissions Quasi-peak and Peak Measurements, Receive

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg.	
32.040000	16.31	40.00	23.70	102	51	VERT

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

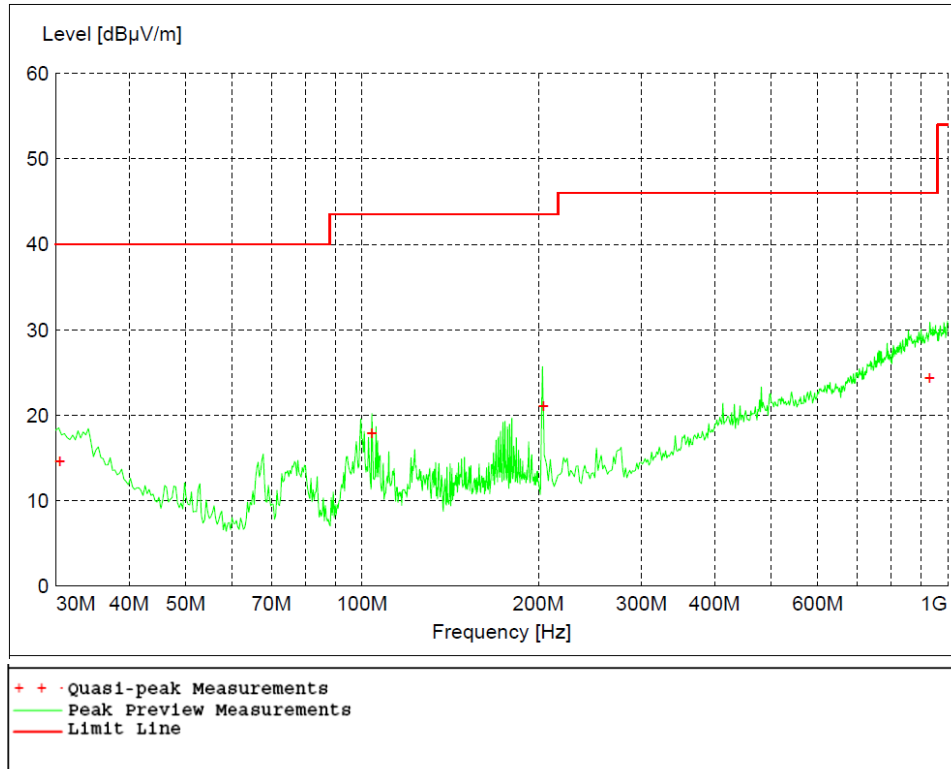


Figure 3 - Radiated Emissions Plot, Low Channel

Table 2 - Radiated Emissions Quasi-peak Measurements, Low Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBμV/m	dBμV/m	dB	cm.	deg.	
30.480000	14.63	40.00	25.40	100	111	VERT
103.980000	17.90	43.50	25.60	100	347	VERT
204.060000	21.07	43.50	22.40	100	6	VERT
931.680000	24.45	46.00	21.60	390	210	VERT

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

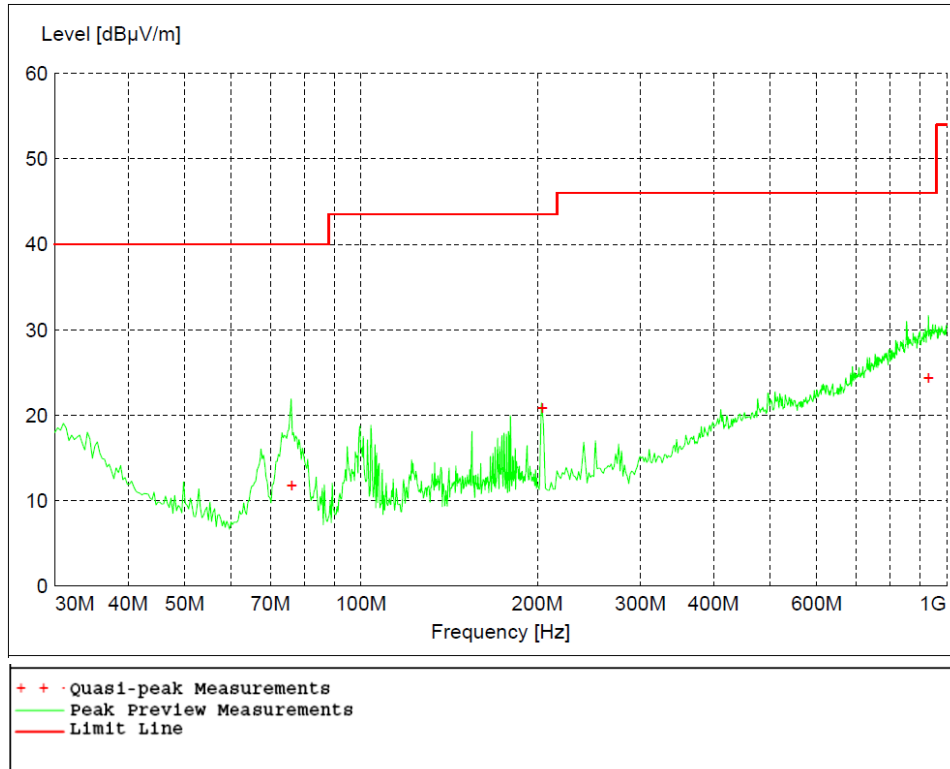


Figure 4 - Radiated Emissions Plot, Mid Channel

Table 3 - Radiated Emissions Quasi-peak Measurements, Mid Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBμV/m	dBμV/m	dB	cm.	deg.	
76.260000	11.83	40.00	28.20	193	143	VERT
204.060000	20.90	43.50	22.60	99	360	VERT
931.740000	24.37	46.00	21.60	182	67	VERT

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

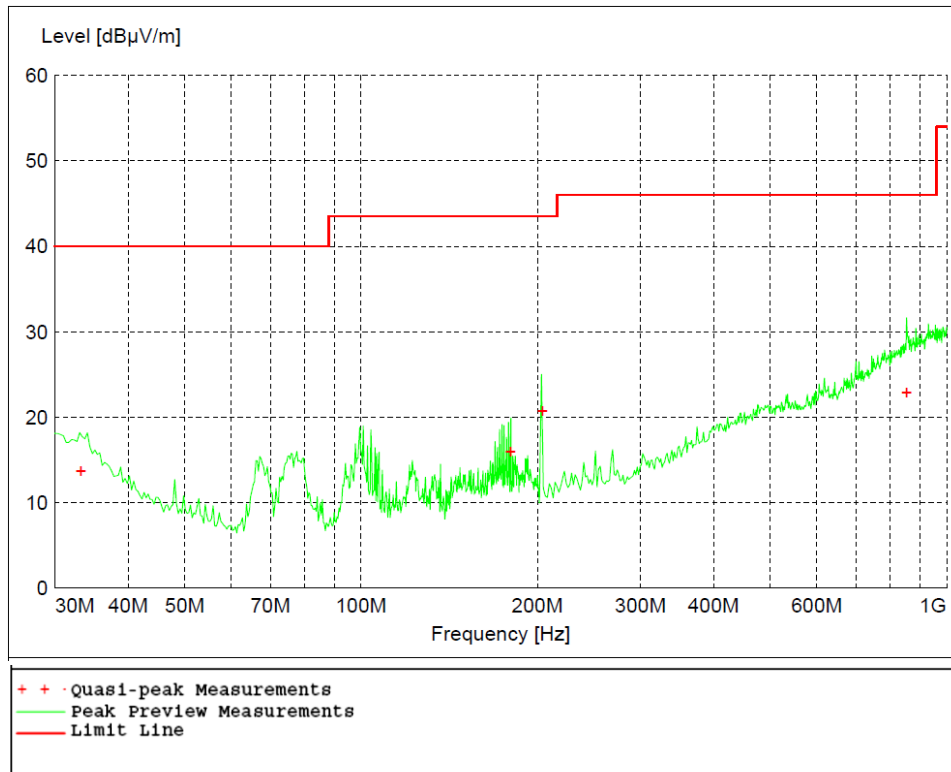


Figure 5 - Radiated Emissions Plot, High Channel

Table 4 - Radiated Emissions Quasi-peak Measurements, High Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBμV/m	dBμV/m	dB	cm.	deg.	
33.240000	13.78	40.00	26.20	100	146	VERT
180.060000	16.04	43.50	27.50	100	313	VERT
204.060000	20.80	43.50	22.70	99	358	VERT
854.580000	22.94	46.00	23.10	199	339	HORI

REMARKS:

1. Emission level (dBμV/m) = Raw Value (dBμV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

Table 5 - Radiated Emissions Peak Detector Measurements, Low Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg.	
2402.000000	96.23	N/A	N/A	201	298	HORI
4804.200000	47.63	74.00	26.37	203	0	HORI

Table 6 - Radiated Emissions Average Detector Measurements, Low Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg.	
2402.000000	95.54	N/A	N/A	201	298	HORI
4804.200000	40.43	54.00	13.60	203	0	HORI

Table 7 - Radiated Emissions Peak Detector Measurements, Middle Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg.	
2442.000000	97.71	N/A	N/A	244	228	HORI
4884.200000	48.74	74.00	25.26	100	263	HORI

Table 8 - Radiated Emissions Average Detector Measurements, Middle Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg.	
2442.000000	97.15	N/A	N/A	244	228	HORI
4884.200000	42.31	54.00	11.70	100	263	HORI

Table 9 - Radiated Emissions Peak Detector Measurements, High Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg.	
2480.000000	97.54	N/A	N/A	234	226	HORI
4960.000000	45.84	74.00	28.16	328	198	HORI
6998.600000	46.12	74.00	27.88	105	338	HORI

Table 10 - Radiated Emissions Average Detector Measurements, High Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg.	
2480.000000	96.97	N/A	N/A	234	226	HORI
4960.000000	32.19	54.00	21.80	328	198	HORI
6998.600000	33.12	54.00	20.90	105	338	HORI

4.3 PEAK OUTPUT POWER

Test Method: ANSI C63.10:

1. Section(s) 11.9.1.1

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

Limits of power measurements:

The maximum allowed peak output power is 30 dBm.

Test procedures:

All measurements were taken at a distance of 3m from the EUT. The EUT was maximized in all 3 orthogonal positions. 10 MHz RBW and 10 MHz VBW was used. The intention was to verify that the measurement results were the same as the original filing for this device within the measurement uncertainty of the laboratory.

Deviations from test standard:

No deviation.

Test setup:

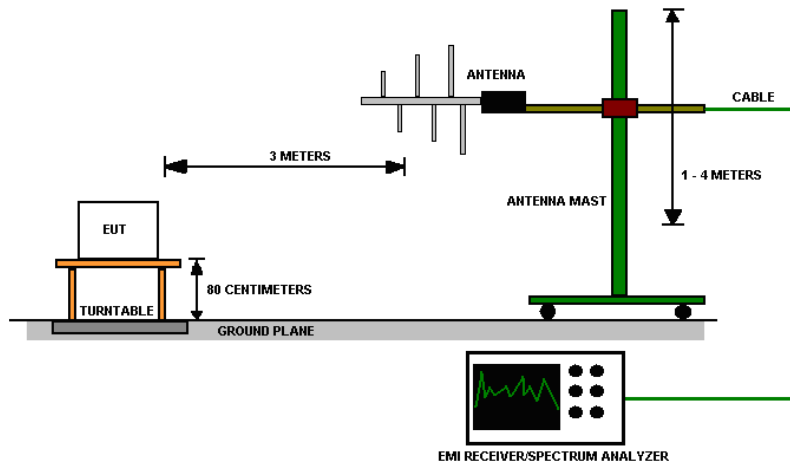


Figure 6 – Peak Output Power Measurements Test Setup

EUT operating conditions:

The EUT was powered 12V battery unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.

Test results:

The uncertainty for conducted peak power measurements is ± 1.1 dB and average power is ± 1.37 dB


	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

Peak Output Power

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK OUTPUT POWER (dBm) MU = ± 1.1 dB	Method	RESULT
Low	2402	-0.10	Radiated	PASS
Middle	2440	0.72	Radiated	PASS
High	2480	0.59	Radiated	PASS

** Sample EIRP measurement can be found in Appendix A. The plots reflect uncorrected value.

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

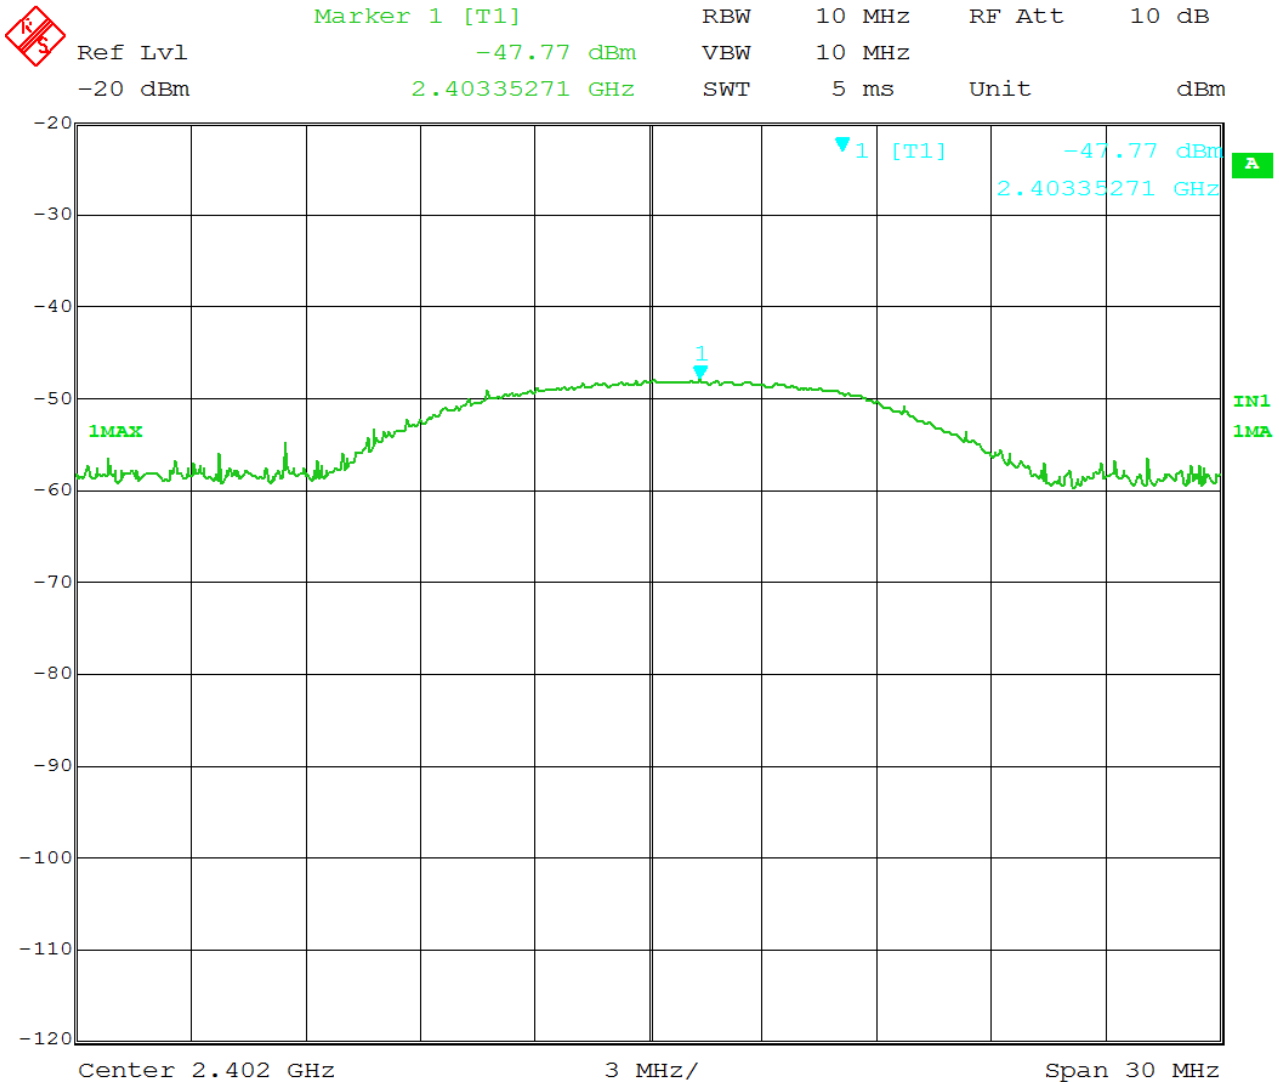

Date: 11.APR.2019 12:28:13

Figure 7 – Peak Output Power, Low Channel, GFSK

Maximum power = $-47.77 \text{ dBm} + 107 + \text{CL} + \text{AF} - 95.23 = -0.10 \text{ dBm}^*$


CL = cable loss = 7.60 dB

AF = antenna factor = 28.30 dB

107 = conversion from dBm to dBμV on a 50Ω measurement system

-95.23 = Conversion from field strength (dBμV/m) to EIRP (dBm) at a 3m measurement distance

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

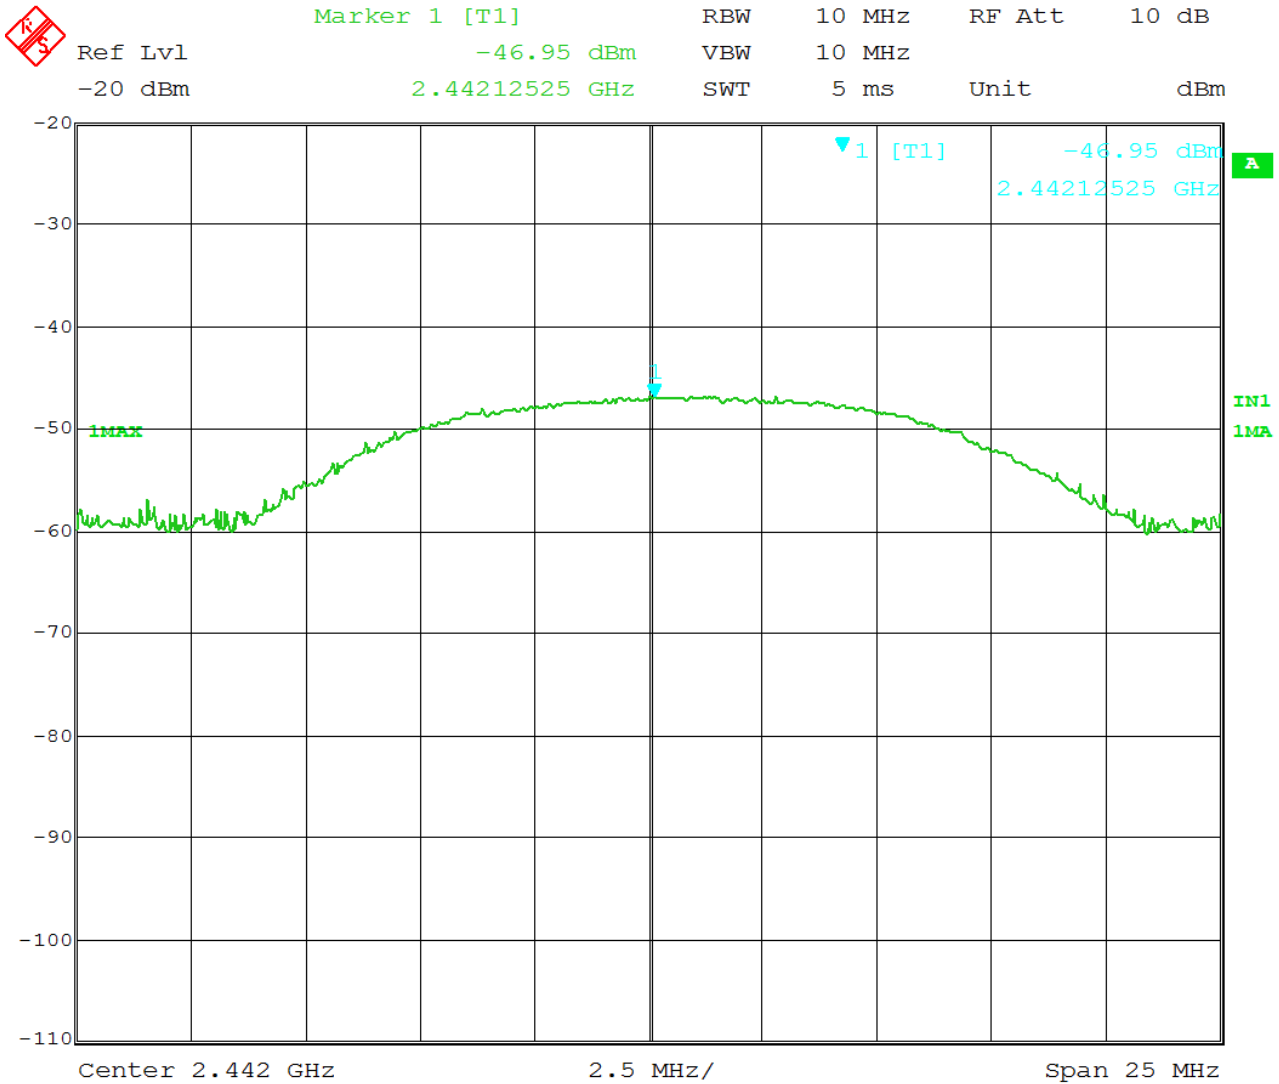

Date: 11.APR.2019 14:00:23

Figure 8 – Peak Output Power, Mid Channel, GFSK

Maximum power = -46.95 dBm + 107 + CL + AF - 95.23 = 0.72 dBm*


CL = cable loss = 7.70 dB

AF = antenna factor = 28.30 dB

107 = conversion from dBm to dBμV on a 50Ω measurement system

-95.23 = Conversion from field strength (dBμV/m) to EIRP (dBm) at a 3m measurement distance

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

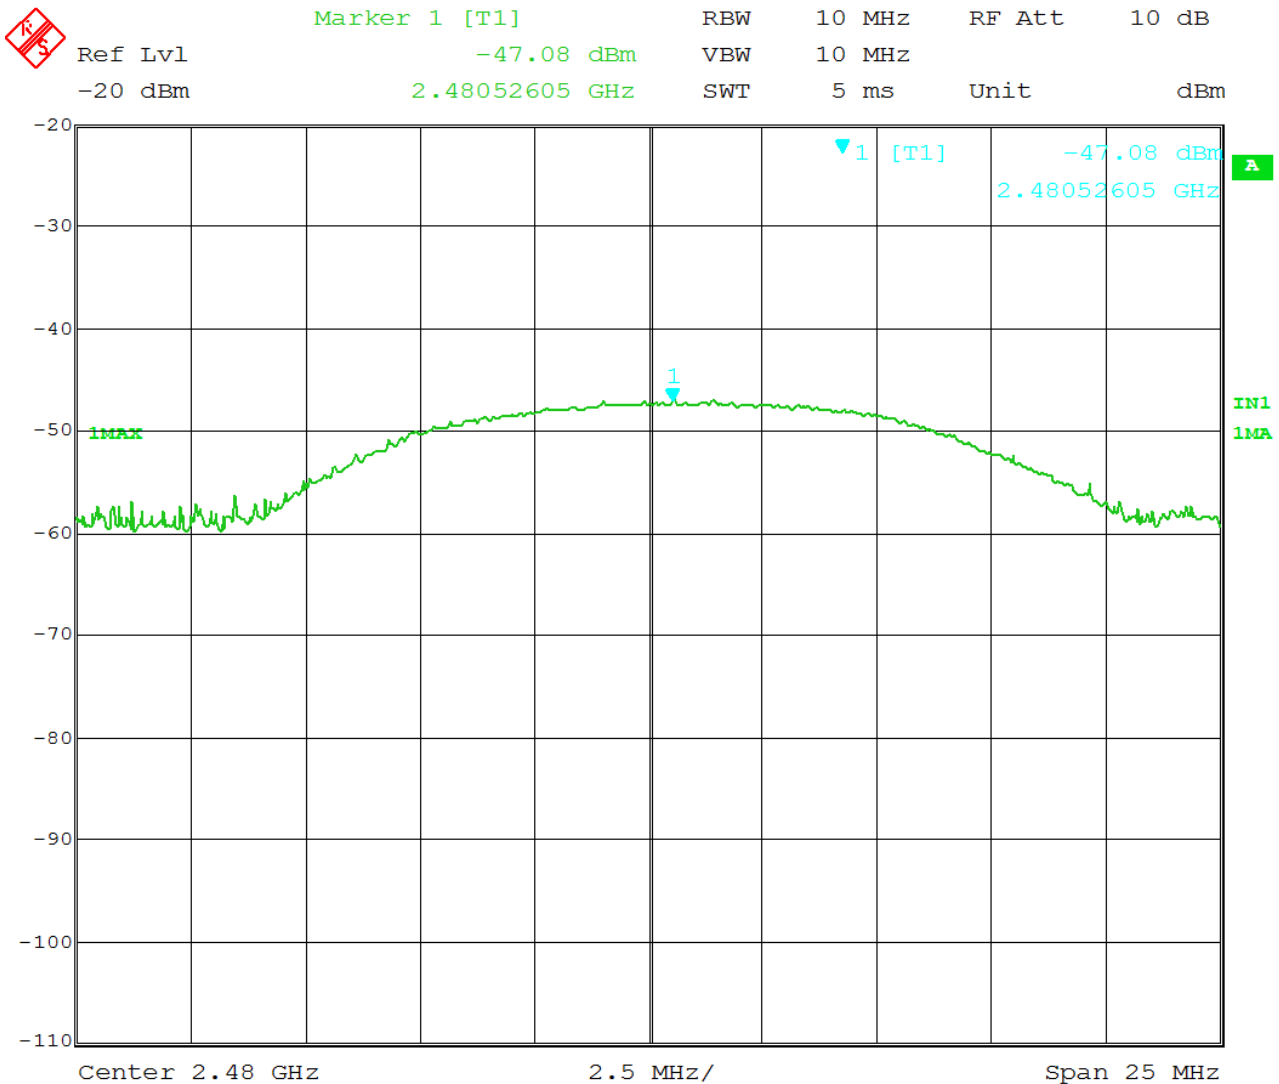

Date: 11.APR.2019 14:03:51

Figure 9 – Peak Output Power, High Channel, GFSK

Maximum power = -47.08 dBm + 107 + CL + AF - 95.23 = 0.59 dBm*

CL = cable loss = 7.70 dB

AF = antenna factor = 28.20 dB

107 = conversion from dBm to dBμV on a 50Ω measurement system

-95.23 = Conversion from field strength (dBμV/m) to EIRP (dBm) at a 3m measurement distance

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

4.4 BANDWIDTH

Test Method: ANSI C63.10,
1. Section(s) 11.8.1 “DTS Bandwidth, Option 1”

Limits of bandwidth measurements:
The 99% occupied bandwidth is displayed.

The 6dB bandwidth of the signal must be greater than 500 kHz.

Test procedures:
All measurements were taken at a distance of 3m from the EUT. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW.

The 99% occupied is defined as the bandwidth at which 99% of the signal power is found. This corresponds to 20dB down from the maximum power level. The maximum power was measured with the largest resolution bandwidth possible (10MHz) and this value was recorded. The signal was then captured with a 1 MHz resolution bandwidth and the frequencies where the measurements were 20dB below the maximum power were marked. The bandwidth between these frequencies was recorded as the 99% occupied bandwidth.

The 6 dB bandwidth is defined as the bandwidth of which is higher than peak power minus 6dB.

Deviations from test standard:
No deviation

Test setup:
See Section 4.3

EUT operating conditions:
The EUT was powered a 12V battery unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

Test results:


99% Occupied Bandwidth

CHANNEL	CHANNEL FREQUENCY (MHz)	99% Occupied BW (MHz)
Low	2402	1.206
Middle	2440	1.142
High	2480	1.130

6dB Bandwidth

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BW (kHz)
Low	2402	741.49
Middle	2440	741.49
High	2480	736.84


	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

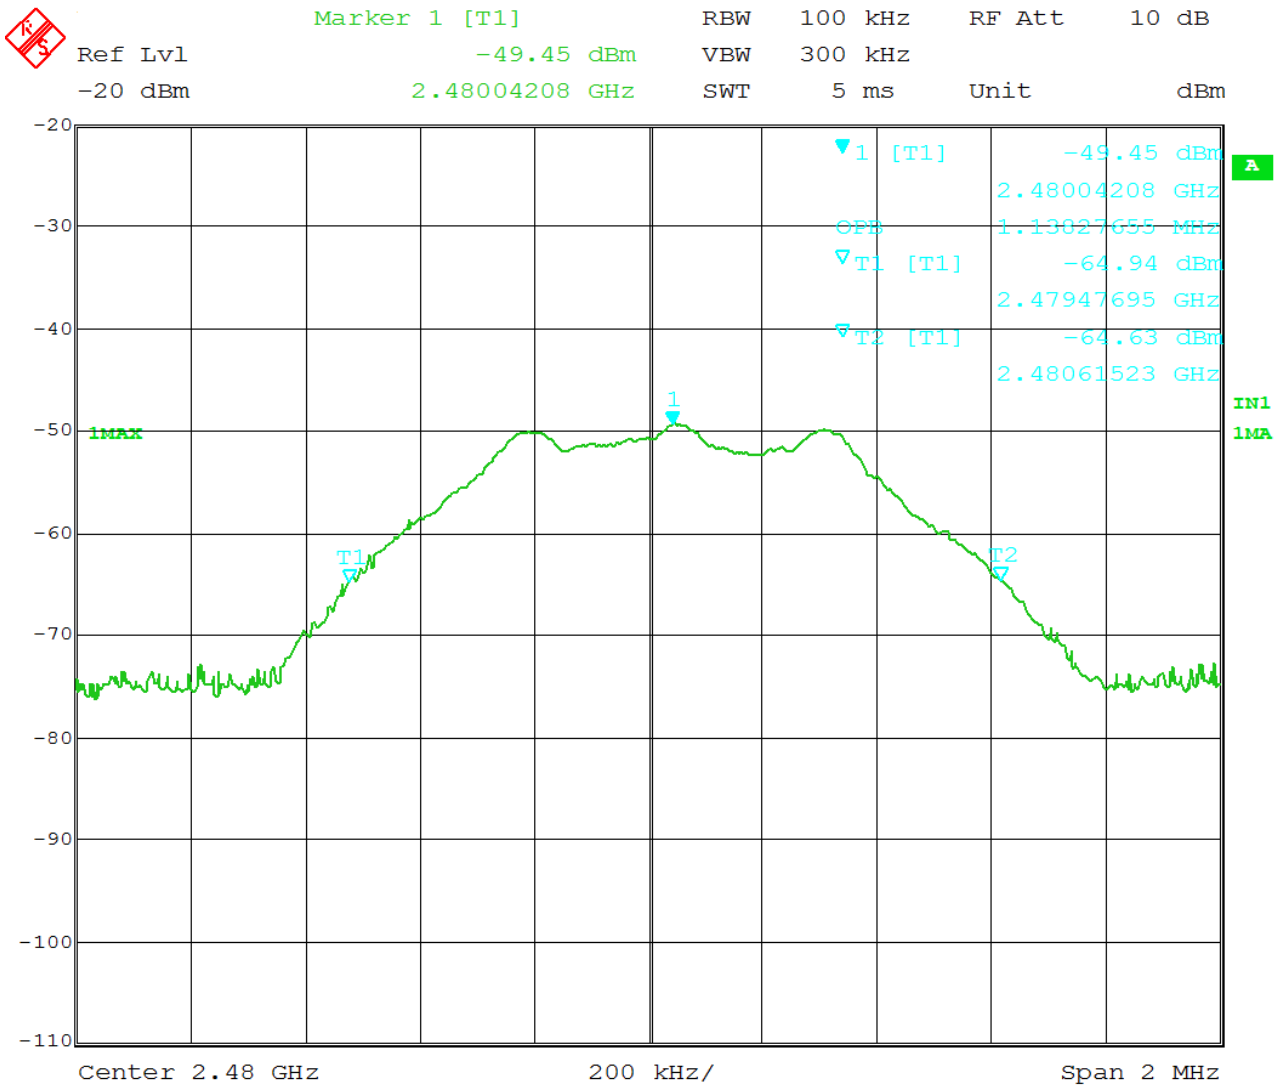

Date: 11.APR.2019 14:05:22


Figure 12 - 99% Occupied Bandwidth, High Channel, GFSK

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

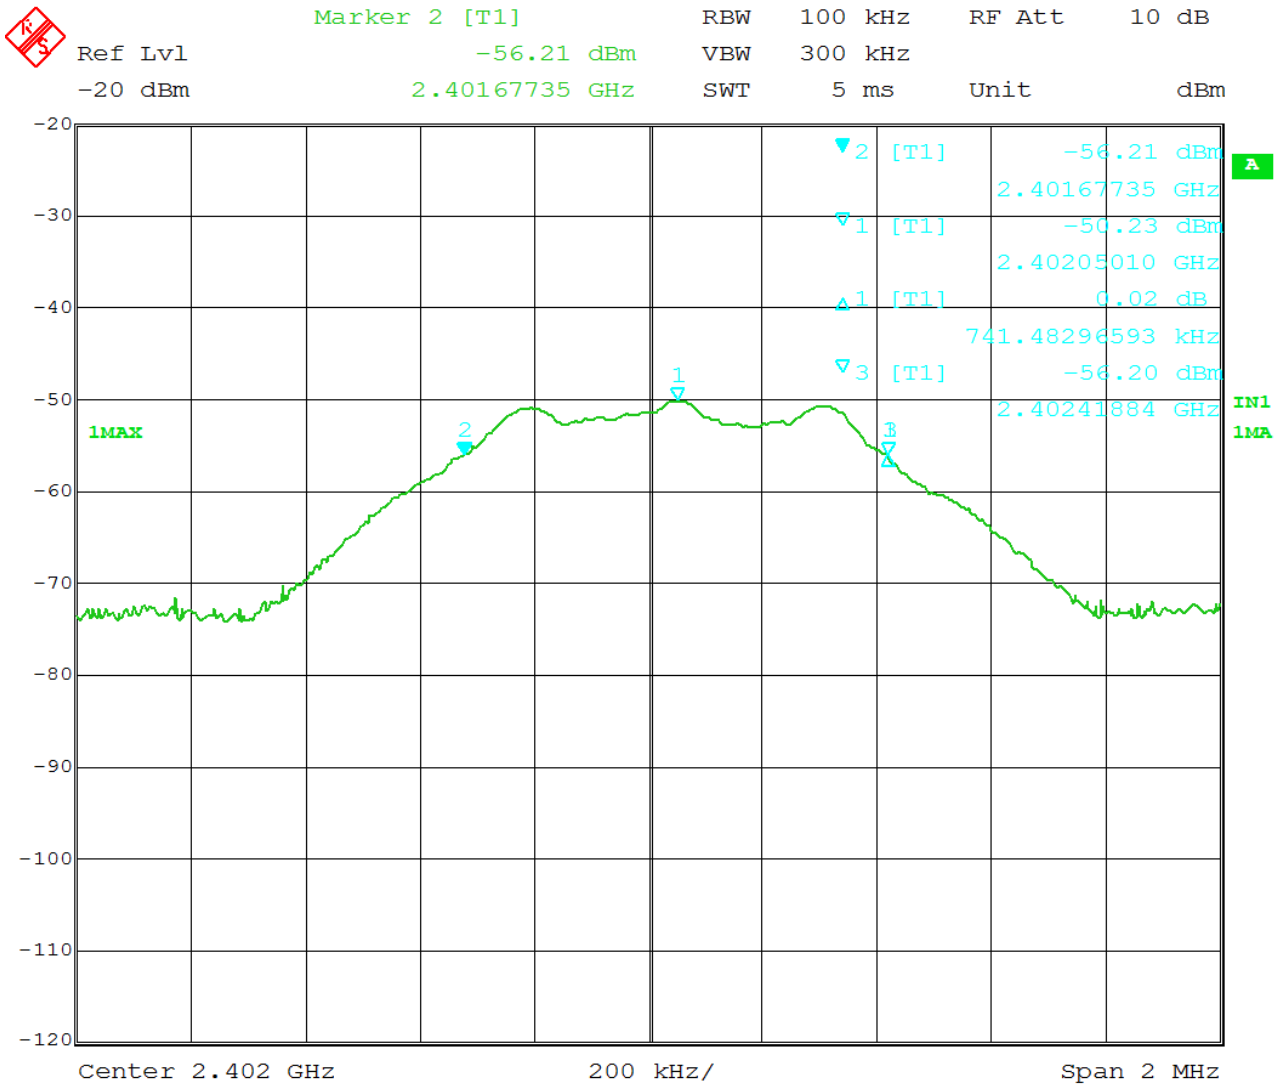

Date: 11.APR.2019 12:40:02

Figure 13 - 6dB Bandwidth, Low Channel, GFSK

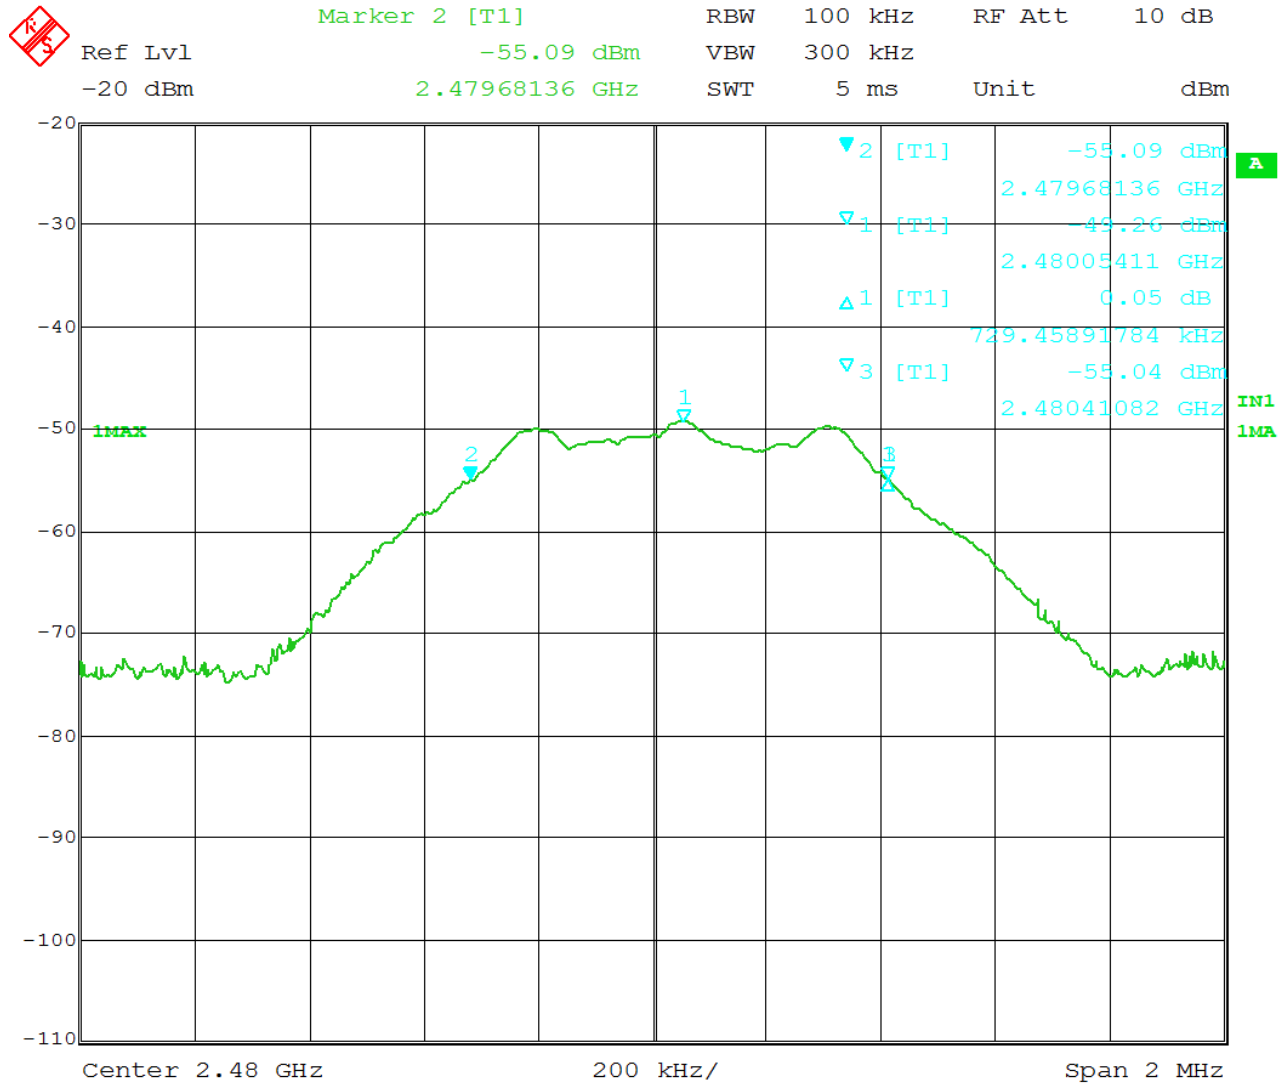

Date: 11.APR.2019 14:07:22

Figure 15 - 6dB Bandwidth, High Channel, GFSK

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

4.5 BANDEDGES

Test Method: ANSI C63.10:

1. Section 6.10.5 (used for restricted bands)
2. Section 11.13.2 "Marker-delta method" (for unrestricted bands)
3. Section 11.11, "Measurement in unrestricted frequency bands"

Limits of bandedge measurements:

For emissions outside of the allowed band of operation (2400.0MHz – 2480.0MHz), the emission level needs to be 20dB under the maximum fundamental field strength. However, if the emissions fall within one of the restricted bands from 15.205 the field strength levels need to be under that of the limits in 15.209.

Test procedures:

The EUT was tested in the same method as described in section 4.4 - *Bandwidth*. The resolution bandwidth was set to 100kHz and video bandwidth to 300 kHz the EMI receiver was used to scan from the bandedge to the fundamental frequency with a quasi-peak detector. The highest emissions level beyond the bandedge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209.

Deviations from test standard:

No deviation.

Test setup:

See Section 4.3

EUT operating conditions:

The EUT was powered by a 12V battery unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

Test results:

CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level dBm	Relative Fundamental dBm	Delta (dB)	Min Delta (dB)	Result
Low, Continuous (restricted)	GFSK	2390	-98.39	-50.47	47.92	42.23	PASS
High, Continuous (restricted)	GFSK	2483.5	-101.68	-49.55	52.13	43.54	PASS
Low, Continuous (unrestricted)	GFSK	2400	-73.54	-50.47	23.07	20.00	PASS
High, Continuous (unrestricted)	GFSK	2483.5	-75.40	-49.55	25.85	20.00	PASS


*Minimum delta = [highest fundamental peak field strength from Section 4.2] – [Part 15.209 radiated emissions limit.]

From Section 4.2

Fundamental peak field strength at Low Channel GFSK = 96.23 dBμV/m
Fundamental peak field strength at High Channel GFSK = 97.54 dBμV/m

Low Channel minimum delta GFSK = 96.23 – 54.0 dBμV/m = 42.23 dBc
High Channel minimum delta GFSK = 97.54 – 54.0 dBμV/m = 43.54 dBc


	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

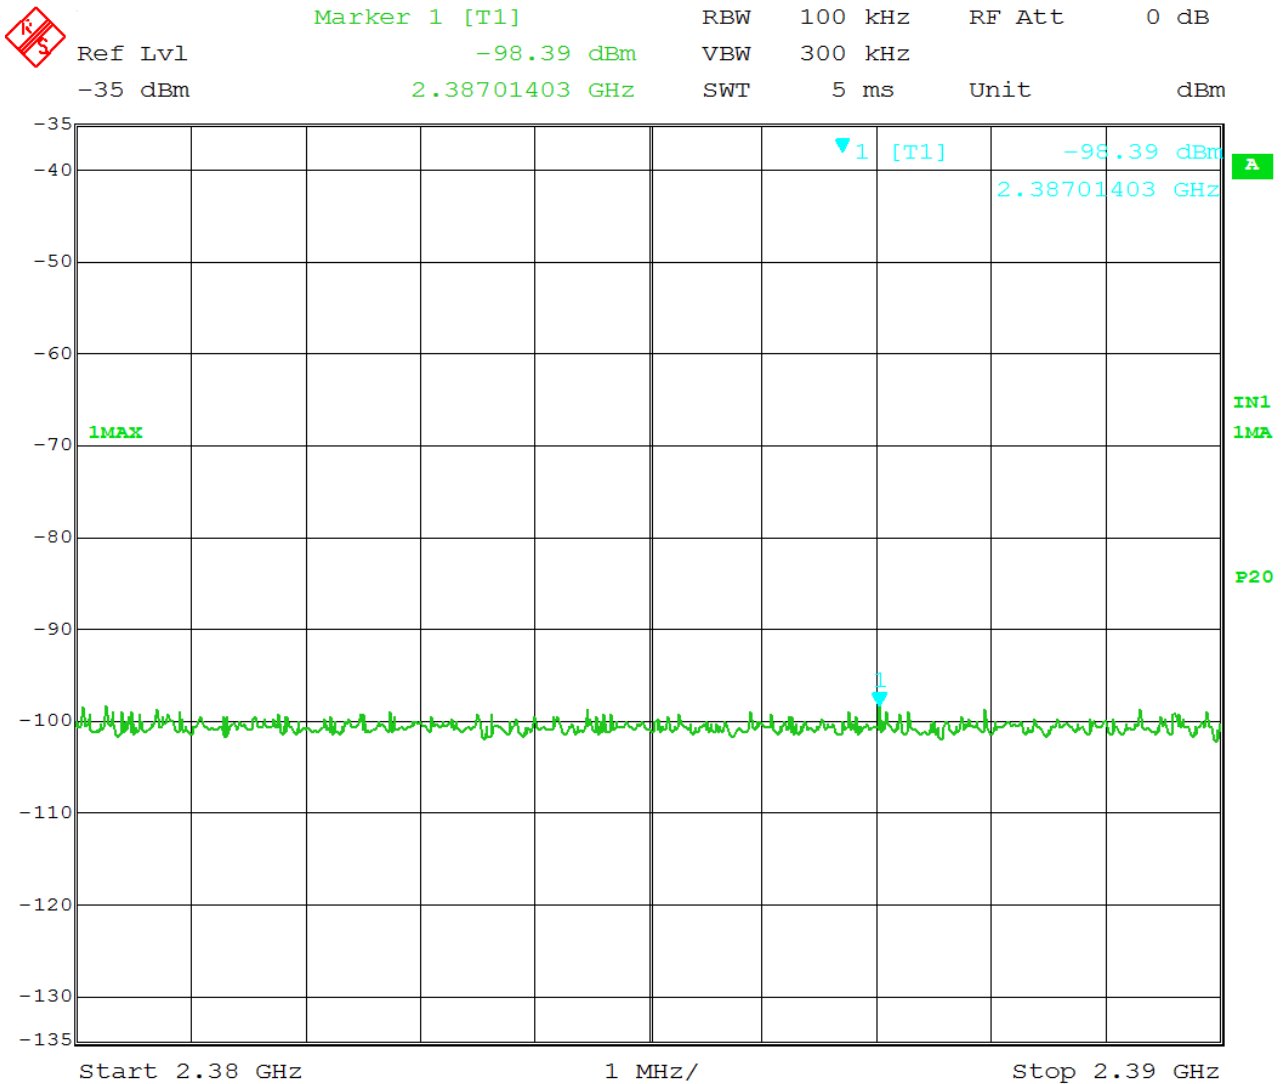

Date: 11.APR.2019 12:46:32

Figure 16 - Band-edge Measurement, Low Channel, Restricted Frequency, Peak


	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

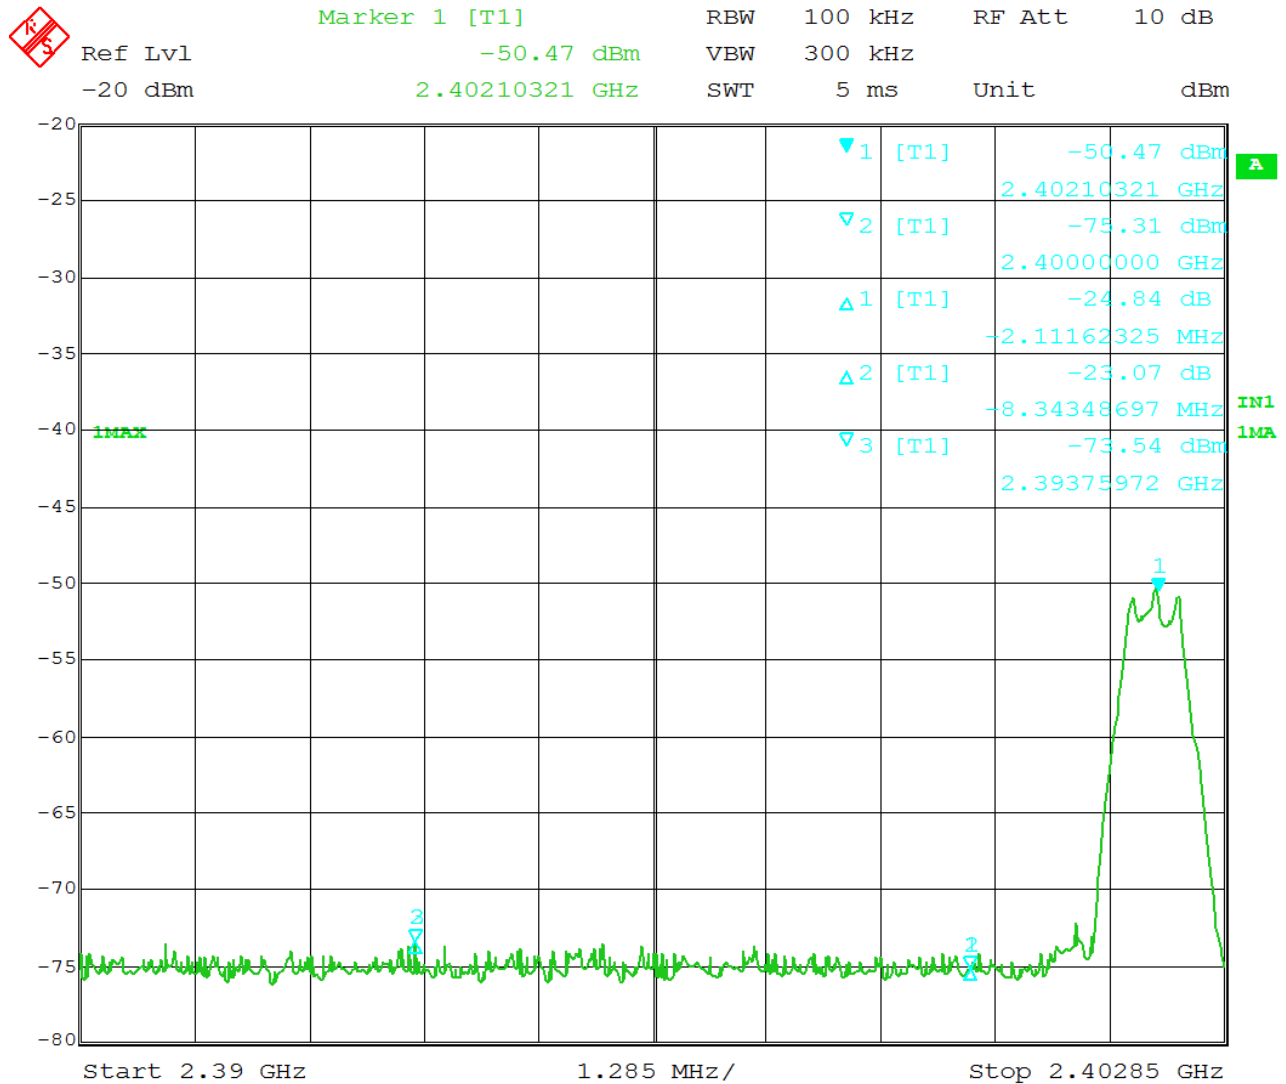

Date: 11.APR.2019 12:44:38

Figure 17 - Band-edge Measurement, Low Channel, Fundamental, Peak


	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

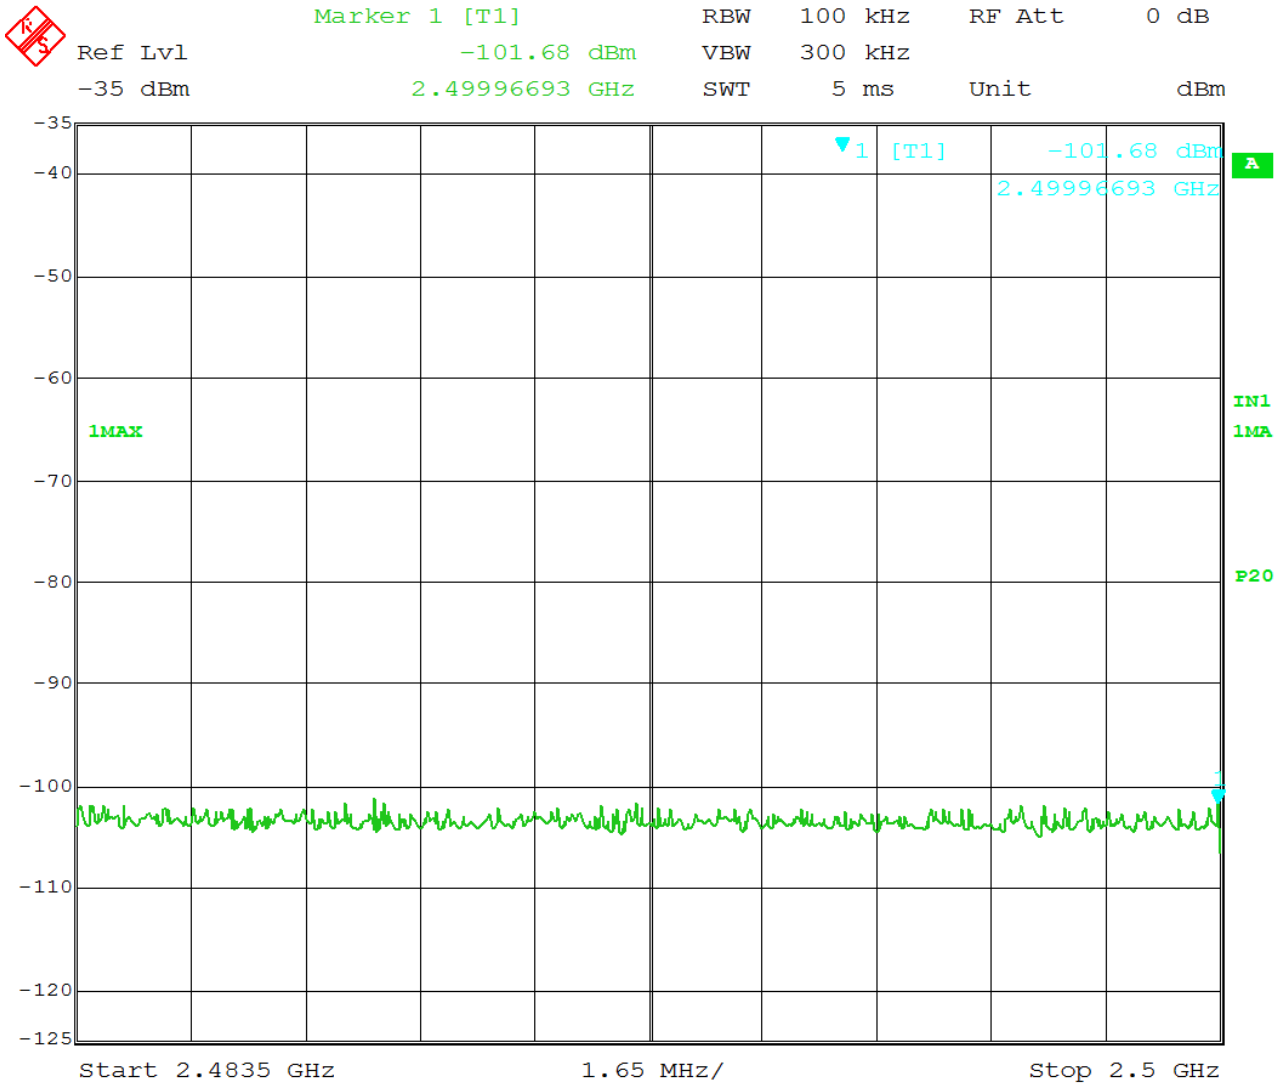

Date: 11.APR.2019 14:09:45

Figure 18 - Band-edge Measurement, High Channel, Restricted Frequency, Peak

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

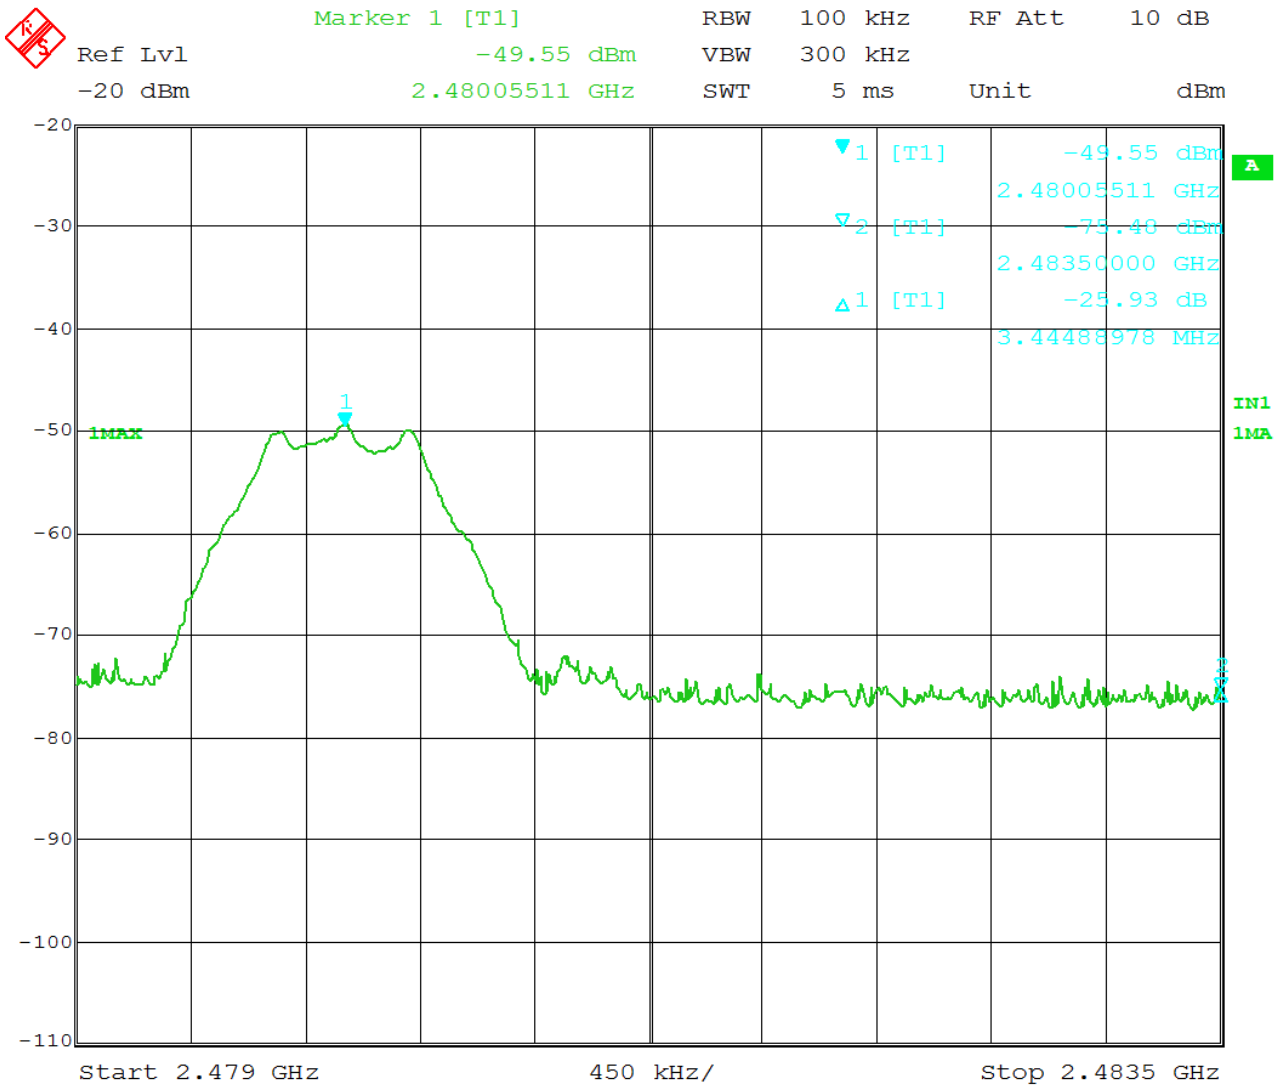

Date: 11.APR.2019 14:08:34

Figure 19 - Band-edge Measurement, High Channel, Fundamental, Peak

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

4.6 POWER SPECTRAL DENSITY

Test Method: ANSI C63.10,

1. Section 11.10.2 "Method PKPSD (peak PSD)"

Limits of power measurements:

The maximum PSD allowed is 8 dBm.

Test procedures:

1. All measurements were taken at a distance of 3m from the EUT. The EUT was maximized in all 3 orthogonal positions.
2. The resolution bandwidth was set to 3 kHz and the video bandwidth was set to 10 kHz to capture the signal. The analyzer used a peak detector in max hold mode.

Test setup:

The EUT was connected to the spectrum analyzer directly with a low-loss shielded coaxial cable on a bench top.

EUT operating conditions:

The EUT was powered by a 12V battery unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.


Test results:

Power Spectral Density

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK PSD(dBm)	Method	Limit (dBm)	RESULT
Low	2402	-17.96	Radiated	8.00	PASS
Middle	2440	-16.49	Radiated	8.00	PASS
High	2480	-17.06	Radiated	8.00	PASS

** Sample EIRP measurement can be found in Appendix A. The plots reflect uncorrected value.


	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

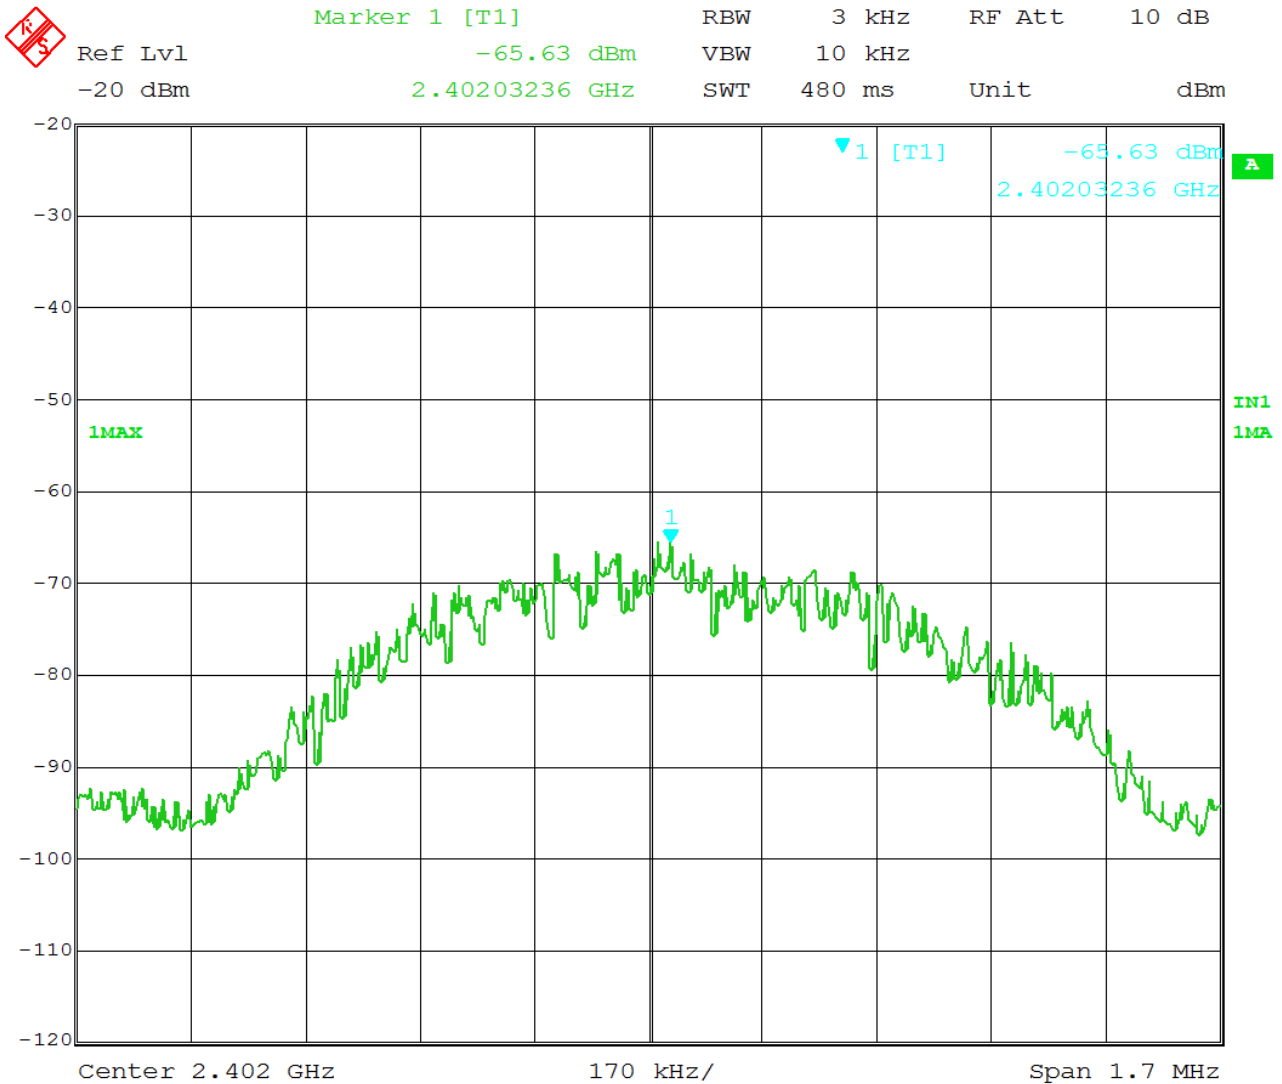

Date: 11.APR.2019 12:41:25

Figure 20 - Power Spectral Density, Low Channel


	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

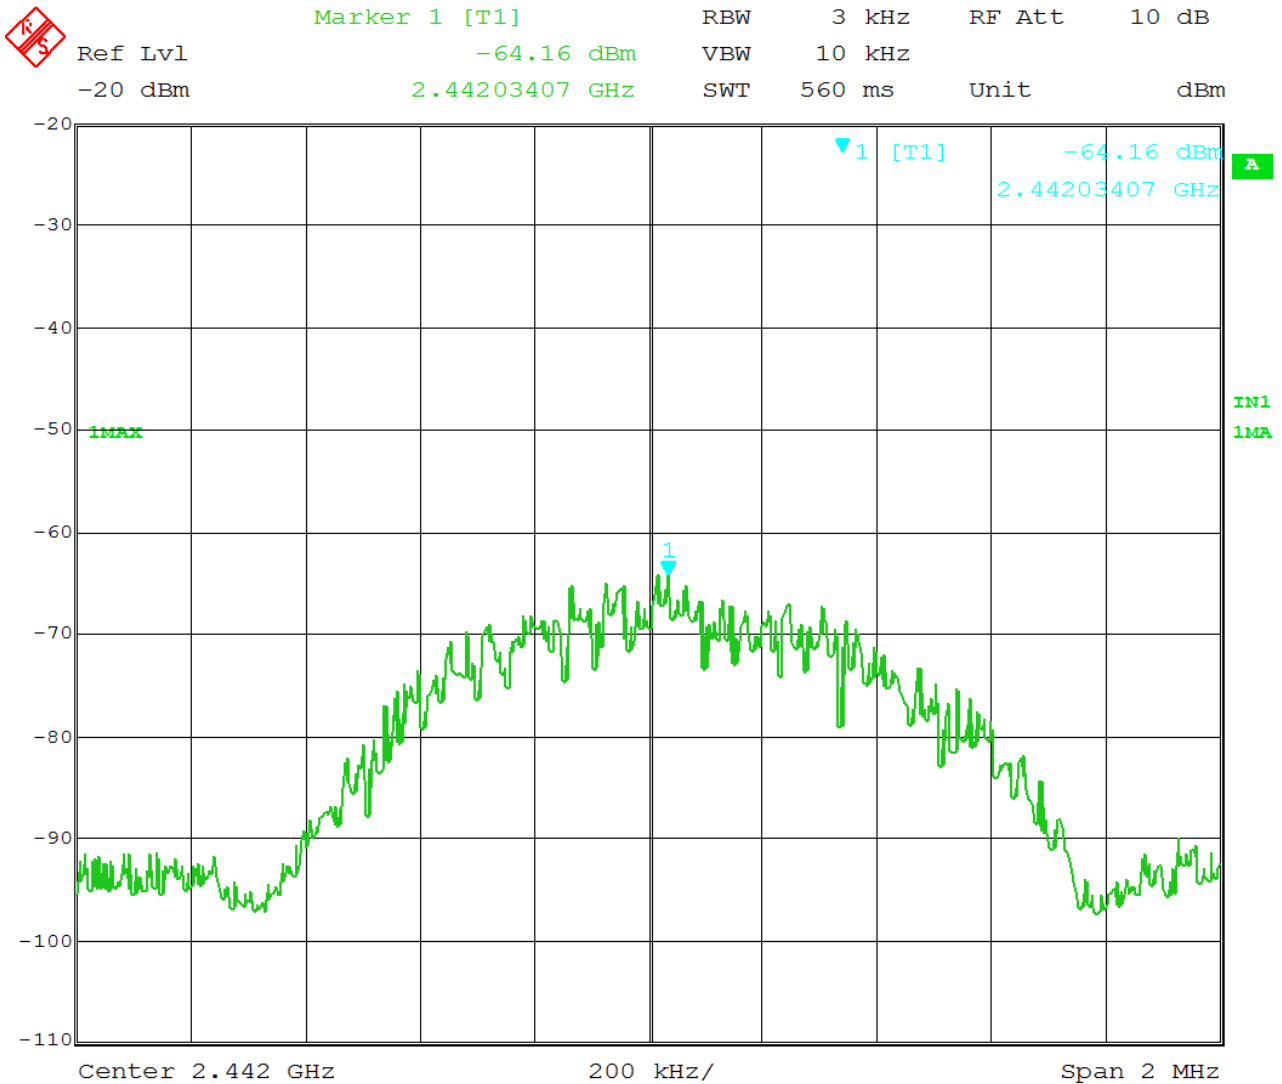

Date: 11.APR.2019 13:59:28

Figure 21 - Power Spectral Density, Mid Channel

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

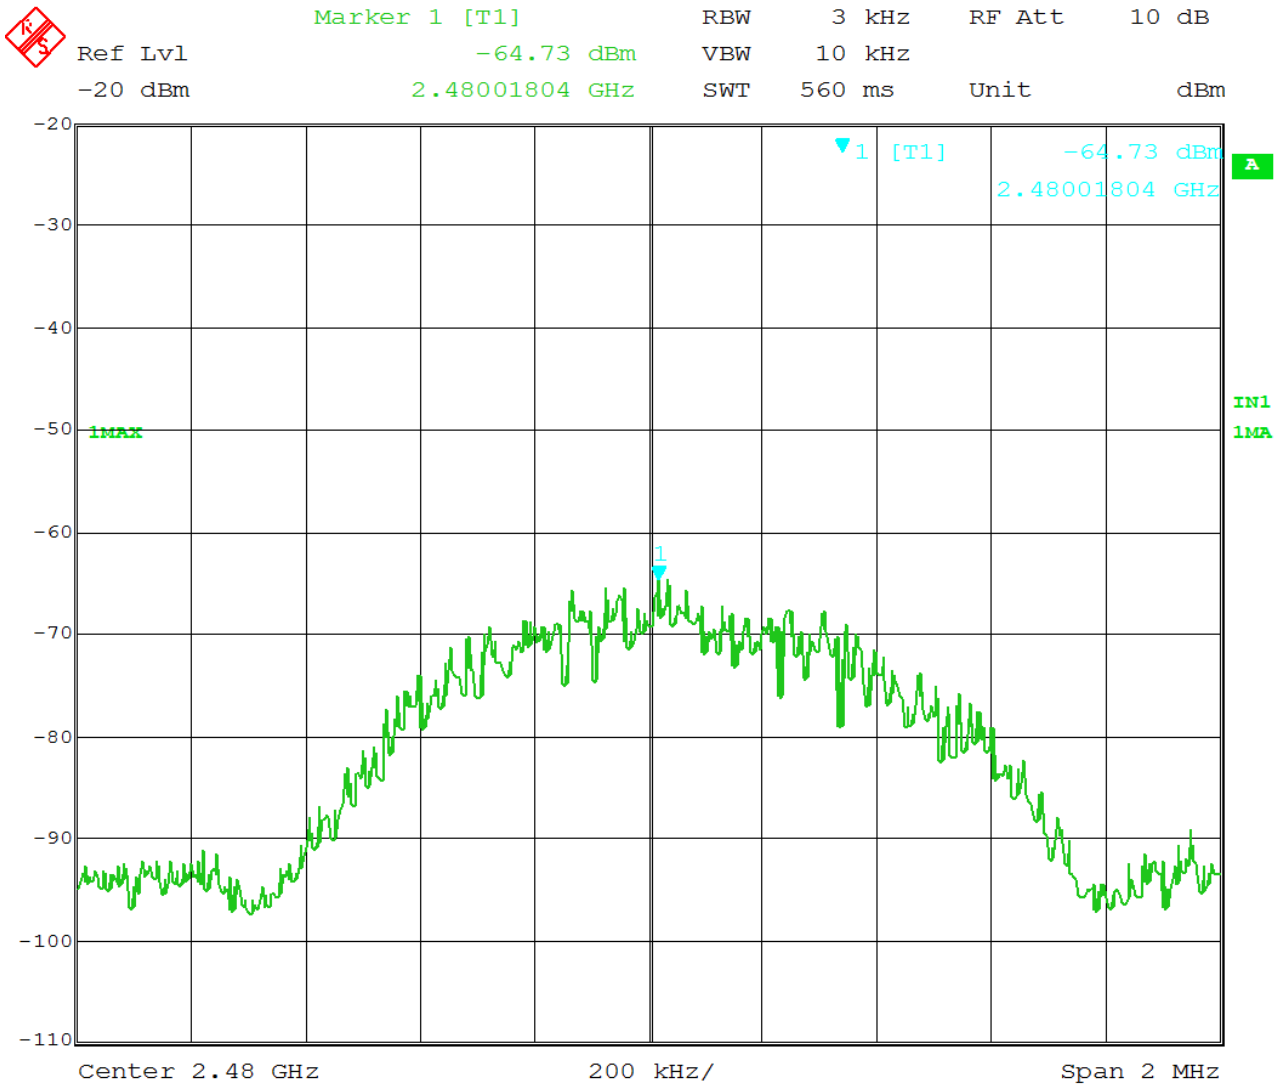

Date: 11.APR.2019 14:04:32

Figure 22 - Power Spectral Density, High Channel

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

APPENDIX A: SAMPLE CALCULATION

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by the taking the $20 \cdot \log(T_{\text{on}}/100)$ where T_{on} is the maximum transmission time in any 100ms window.

****Sample EIRP Measurements:**

$$\text{Maximum power} = -41.06 \text{ dBm} + 107 + \text{CL} + \text{AF} - 95.23 = 6.61 \text{ dBm}^*$$

CL = cable loss = 7.60 dB

AF = antenna factor = 28.30 dB

107 = conversion from dBm to dB μ V on a 50 Ω measurement system

-95.23 = Conversion from field strength (dB μ V/m) to EIRP (dBm) at a 3m measurement distance

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP (Watts) = [Field Strength (V/m) \times antenna distance (m)]^2 / 30$$

$$Power (watts) = 10^{[Power (dBm)/10]} / 1000$$

$$Voltage (dB\mu V) = Power (dBm) + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$Field Strength (V/m) = 10^{[Field Strength (dB\mu V/m) / 20]} / 10^6$$

$$Gain = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = [FS(V/m) \times d^2]/30 = FS [0.3] \quad \text{for } d = 3$$

$$EIRP(dBm) = FS(dB\mu V/m) - 10(\log 10^9) + 10\log[0.3] = FS(dB\mu V/m) - 95.23$$

10log(10^9) is the conversion from micro to milli

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

APPENDIX B – MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:

Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	±3.82 dB
Radiated Emissions, 3m	1GHz - 18GHz	±4.44 dB
Emissions limits, conducted	30MHz – 18GHz	±3.30 dB
Antenna port conducted	9 kHz – 25 GHz	±0.50 dB

Values were calculated per CISPR 16-4-2:2011

Expanded uncertainty values are calculated to a confidence level of 95%.

	Report Number:	R20181130-20-04	Rev	B
	Prepared for:	Garmin		

REPORT END