

FCC/ISED DXX Part 15.225 Test Report

Prepared for: Garmin International Inc.

Address: 1200 E. 151st Street
Olathe, Kansas, 66062, USA

Product: A03618

Test Report No: R20181219-20-10A

Approved By:



Nic S. Johnson, NCE
Technical Manager
iNARTE Certified EMC Engineer #EMC-003337-NE

DATE: 12 July 2019

Total Pages: 23



The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

	Report Number:	R20181130-20-10	Rev	A
	Prepared for:	Garmin		

Revision Page

Rev. No.	Date	Description
Original	21 May 2019	Original – Prepared by KVepuri Approved by NJohnson
A	12 July 2019	Updated calculations below Figure 1 Added note to Section 3.1.1 Corrected peak power calculation on Page 10 Includes NCEE Labs report R20181130-20-10 and its amendment in full -NJ

	Report Number:	R20181130-20-10	Rev	A
	Prepared for:	Garmin		

TABLE OF CONTENTS

1	Summary of Test Results	4
1.1	Emissions Test Results	4
2	EUT Description.....	5
2.1	Equipment under Test (EUT)	5
2.2	Laboratory Description	5
2.3	EUT Setup	5
3	Test Results	6
3.1	Radiated Emissions, Band Width, Output Power and Band edge	6
3.2	Frequency Error	15
3.3	Conducted Emissions.....	17
Annex A: Measurement Uncertainty.....		20
Annex B: Sample Field Strength Calculation		21
REPORT END		23

TABLES

Table 1 – Emissions Test Results	4
Table 2 – Equipment under Test (EUT)	5
Table 3 – Radiated Emissions QP Data.....	8
Table 4 - Frequency Range Measurements.....	16
Table 5 - Voltage Range Measurements.....	16

FIGURES

Figure 1 – Radiated Emissions Peak Plot, Horizontal Polarization, 10 MHz- 30 MHz.....	7
Figure 2 – Radiated Emissions Peak Plot, 30 MHz- 1 GHz	8
Figure 3 - 99% Occupied Bandwidth, NFC	9
Figure 4 – Output Power	10
Figure 5 – Lower Bandedge	11
Figure 6 – Lower Bandedge	12
Figure 7 – Higher Band edge	13
Figure 8 – Higher Band edge	14
Figure 9 - Conducted Emissions, Line.....	18
Figure 10 - Conducted Emissions, Neutral.....	19

	Report Number:	R20181130-20-10	Rev	A
	Prepared for:	Garmin		

1 Summary of Test Results

The EUT was tested for compliance to the following standards and/or regulations;

1.1 Emissions Test Results

The EUT was tested for compliance to:

US CFR Title 47 FCC Part 15.225
RSS-210 Issue 9

Below is a summary of the test results. Complete results of testing can be found in Section 3.

Table 1 – Emissions Test Results

Emissions Tests	Test Method and Limits	Result
Radiated Emissions	FCC Part 15.225 (a), (b), (c), (d) RSS-210 Issue 5, Sec 4.3	Complies
Frequency Error	FCC Part 15.225 (e) RSS-210 Issue 5, Annex D	Complies
Conducted Emissions	FCC Part 15.207 RSS-Gen Issue 5, Sec 8.8	Complies

	Report Number:	R20181130-20-10	Rev	A
	Prepared for:	Garmin		

2 EUT Description

The Equipment Under Test (EUT) was a portable transceiver from Garmin.

2.1 Equipment under Test (EUT)

Table 2 – Equipment under Test (EUT)

Model	A03618
EUT Received	3 May 2019
EUT Tested	20 May 2019
Serial No.	3988191810 (radiated unit); 3988191793 (conducted unit)
Operating Band	13.56 MHz
Device Type	Low-power
Antenna	Trace Antenna
Power Supply	Internal Battery/ Charger: Garmin (Phi Hong) MN: PSAI10R-050Q (Representative Power Supply)

2.2 Laboratory Description

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
 4740 Discovery Drive
 Lincoln, NE 68521

A2LA Certificate Number: 1953.01
 FCC Accredited Test Site Designation No: US1060
 Industry Canada Test Site Registration No: 4294A-1
 NCC CAB Identification No: US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of $28 \pm 4\%$
 Temperature of $22 \pm 3^\circ \text{C}$

2.3 EUT Setup

The EUT was powered by 120 VAC / 60Hz (5 VDC Output) for all tests.

	Report Number:	R20181130-20-10	Rev	A
	Prepared for:	Garmin		

3 Test Results

3.1 Radiated Emissions, Band Width, Output Power and Band edge

Test:	FCC Part 15.225 (a), (b), (c), (d)		
Test Specifications:	Class A		
Test Result:	Complies	Date:	5/20/2019

3.1.1 Test Description

Radiated emissions measurements were made from 30MHz to 1GHz at a distance of 3m (Radiated Emissions) and 1m (Band width, Output Power and Band edges) inside a semi-anechoic chamber. The EUT was rotated 360°, the antenna height varied from 1-4 meters and both the vertical and horizontal antenna polarizations examined. The results were compared against the limits. Measurements were made by first using a spectrum analyzer to acquire the signal spectrum; individual frequencies were then measured using a CISPR 16.1 compliant receiver with the following bandwidth setting:

- 30MHz – 1GHz:120kHz IF bandwidth, 60kHz steps
- 10 – 30MHz, 9kHz RBW, 5 kHz steps

Intermodulation products were investigated by measuring spurious emissions with all three transmitters continuously transmitting. No intermodulation products were found above the labs system sensitivity.

3.1.2 Test Results

No radiated emissions measurements were found in excess of the limits. Test result data can be seen below.

3.1.3 Test Environment

Testing was performed at the NCEE Labs Lincoln facility in the 10m semi-anechoic chamber. Laboratory environmental conditions varied slightly throughout the test:

- Relative humidity of 30 ± 5%
- Temperature of 23 ±2° C

3.1.4 Test Setup

See Section 2.3 for further details.


3.1.5 Test Equipment Used

Serial No.	Manufacturer	Model	Description	Last Cal.
1647	EMCO	3142B	Bicon Antenna	02 Aug 2017*
00024936	EMCO	6512	Loop Antenna	30 Jan 2018*
100037	Rohde & Schwarz	ES126	EMI Test Receiver	30 Jan 2018*
2575	Rohde & Schwarz	ES-K1	Software v.1.60	N/A

*Two Year Calibration Cycle

	Report Number:	R20181130-20-10	Rev	A
	Prepared for:	Garmin		

3.1.6 Test Pictures and/or Figures

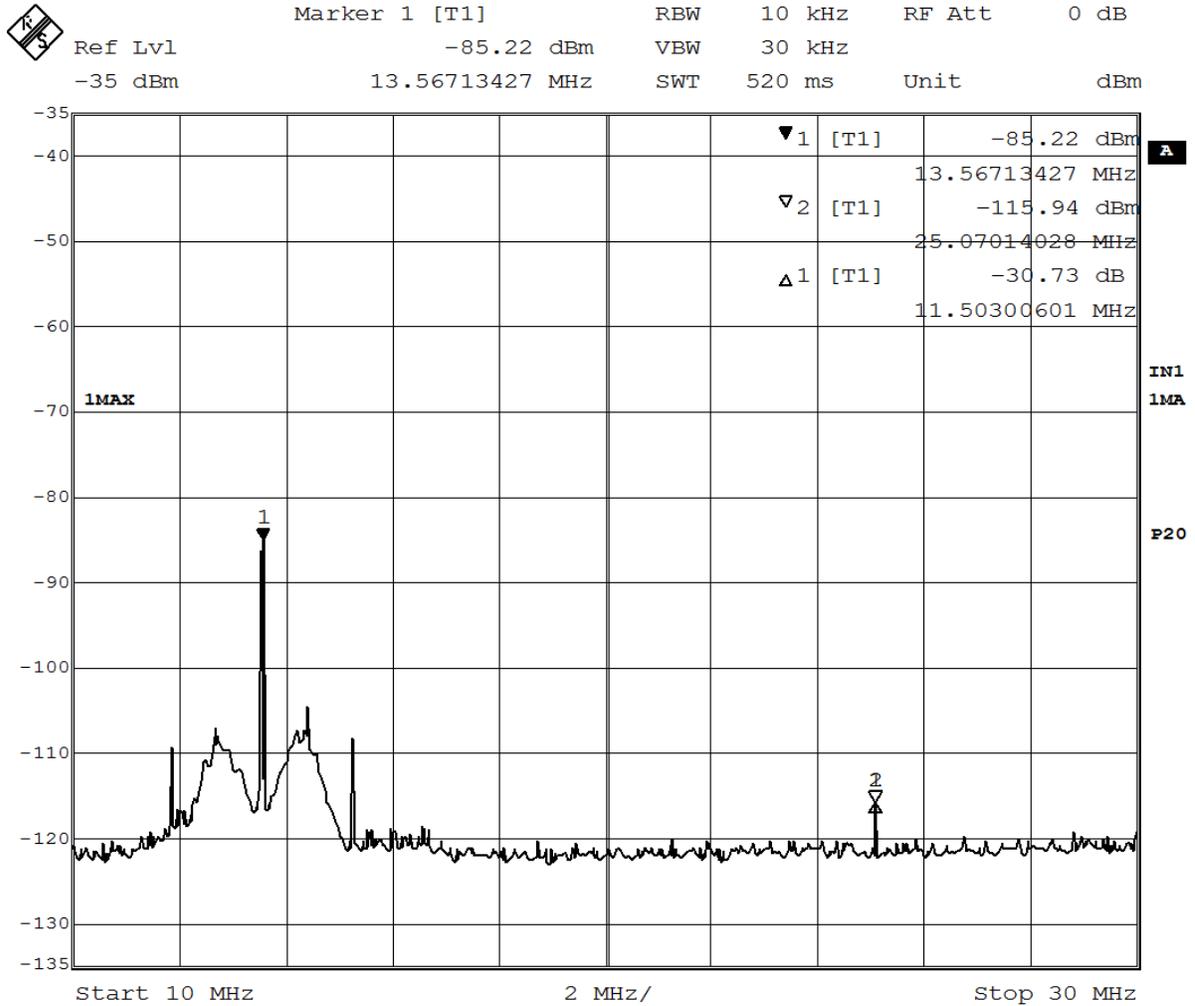

Date: 17.MAY.2019 14:59:12

Figure 1 – Radiated Emissions Peak Plot, Horizontal Polarization, 10 MHz- 30 MHz

Limit: $30 \mu\text{V/m at } 30\text{m} = 29.54 \text{ dB}\mu\text{V/m} = 59.08 \text{ dB}\mu\text{V/m at } 1\text{m}$

Maximum Spurious = $107 - \text{FS}(\text{dBm}) + \text{CL} + \text{AF} = 107 - 115.94 + 0.9 + 35 = 26.96 \text{ dBuV/m @ } 1\text{m}$

CL = cable loss = 0.90 dB

AF = antenna factor = 35.00 dB

107 = conversion from dBm to dB μ V on a 50 Ω measurement system

Loop antenna was used in all three axis, worst axis is reported.


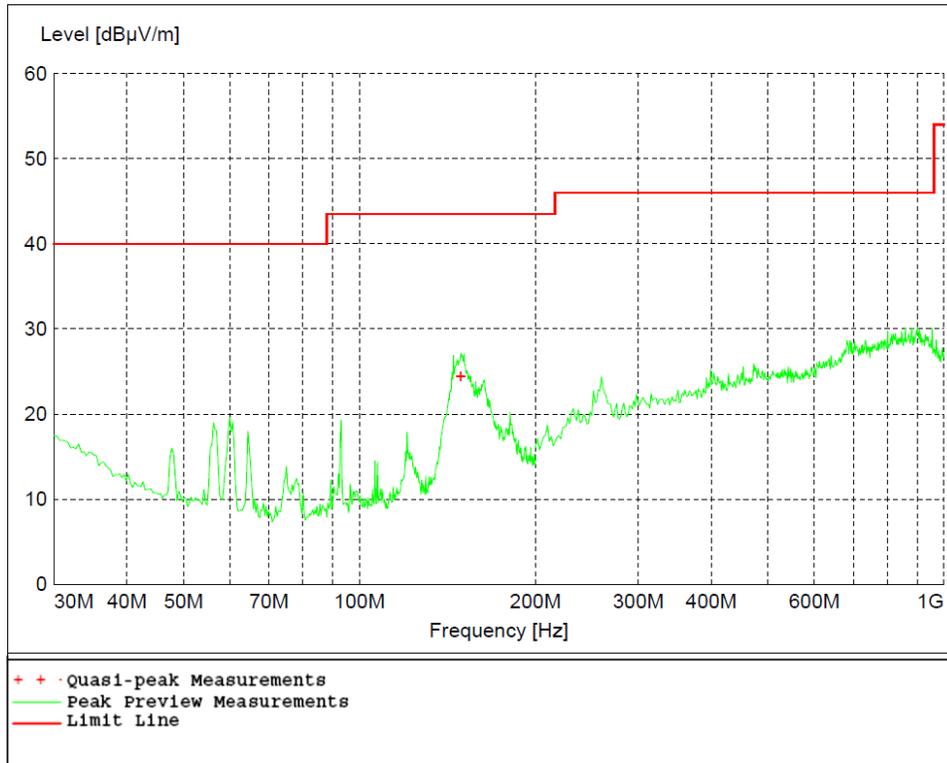


Figure 2 – Radiated Emissions Peak Plot, 30 MHz- 1 GHz

Table 3 – Radiated Emissions QP Data

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg	
148.980000	24.41	43.50	19.10	223	360	HORI


	Report Number:	R20181130-20-10	Rev	A
	Prepared for:	Garmin		

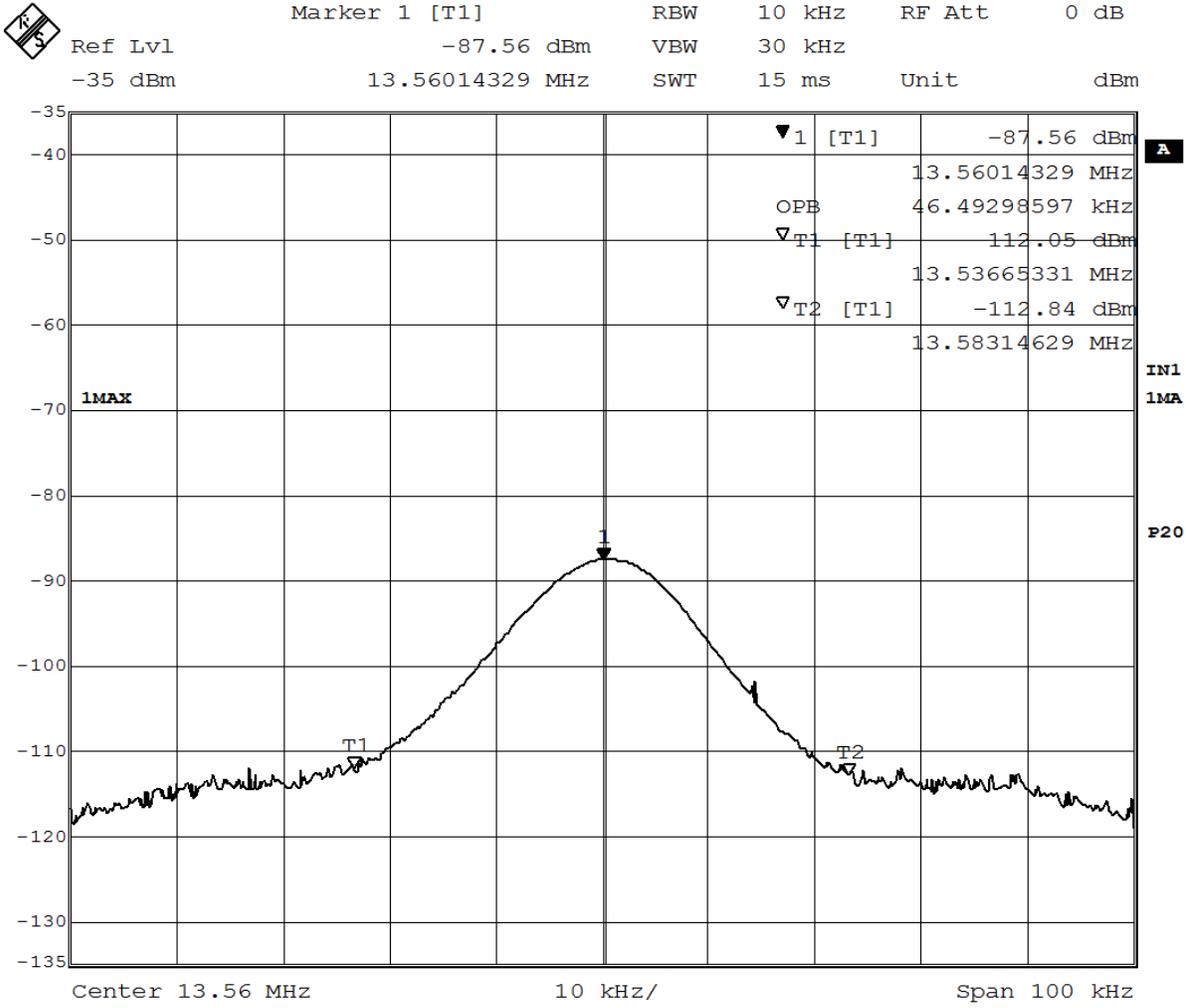

Date: 20.MAY.2019 08:53:11

Figure 3 - 99% Occupied Bandwidth, NFC

	Report Number:	R20181130-20-10	Rev	A
	Prepared for:	Garmin		

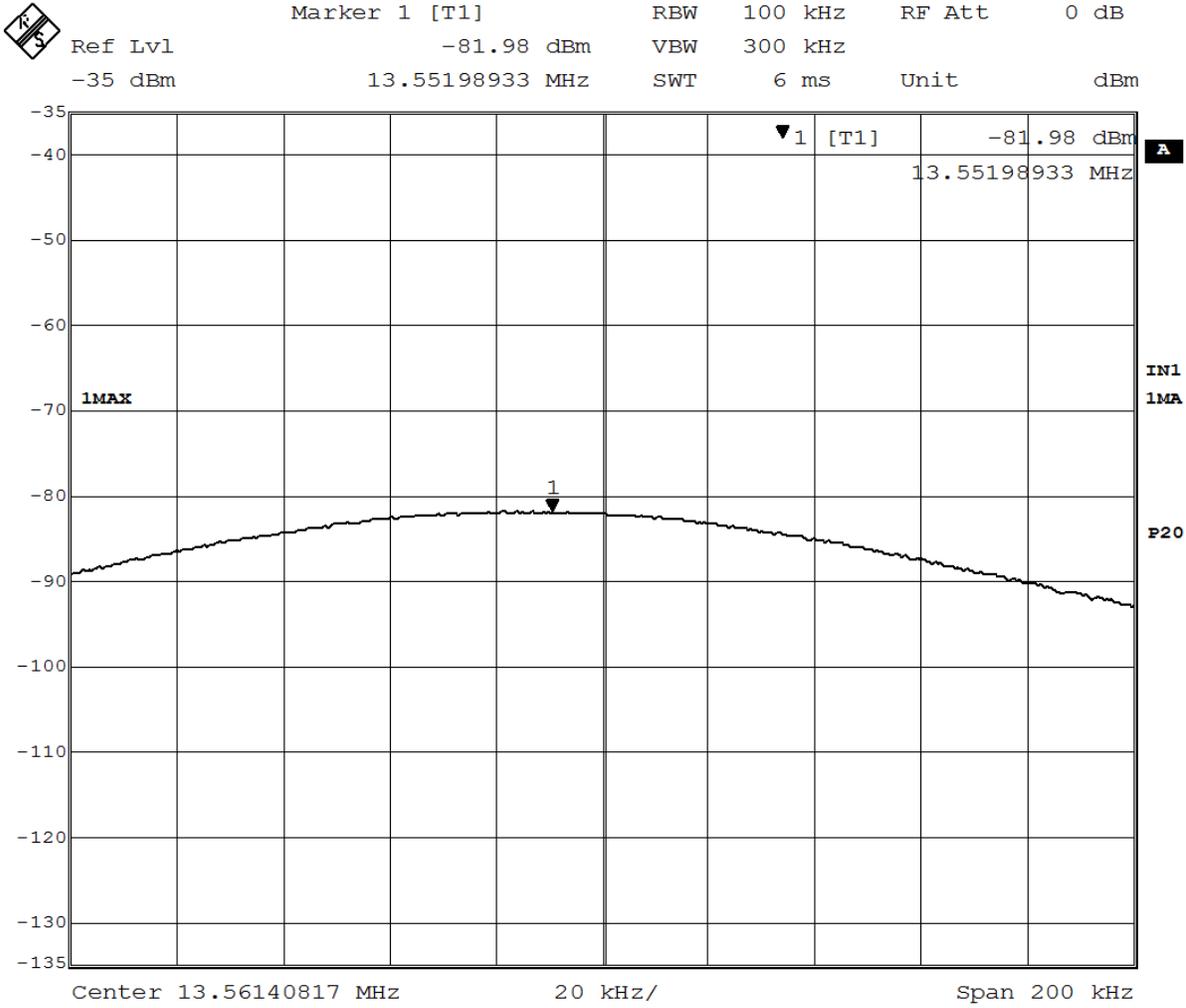

Date: 17.MAY.2019 14:44:58

Figure 4 – Output Power

Raw band level dBm	Corrected band level dB μ V/m	Limit	Margin	Result
-81.98	60.92	113.54*	52.62	PASS

Maximum power = $107 - 81.98 + 0.9 + 35 = 60.92$ dB μ V/m @ 1m
 CL = cable loss = 0.90 dB
 AF = antenna factor = 35.00 dB
 107 = conversion from dBm to dB μ V on a 50 Ω measurement system

* Extrapolated limit from 30 m to 1 m; Measurement performed at 1m distance.




Report Number:	R20181130-20-10	Rev	A
Prepared for:	Garmin		

Band Edge Measurements:

Band edge /Measurement Frequency (MHz)	Uncorrected band level dBμV	Corrected band level dBuV/m @ 1m	Limit	Margin	Result
13.11-13.41	-3.44	32.46	70.51*	38.05	PASS
13.41-13.553	16.34	52.24	80.02*	27.78	PASS
13.71-14.01	16.92	52.82	70.51*	17.69	PASS
13.567-13.71	-2.85	33.05	80.02*	46.97	PASS


* Extrapolated limit from 30 m to 1 m. Corrected band level = uncorrected band level + cable loss + antenna factor

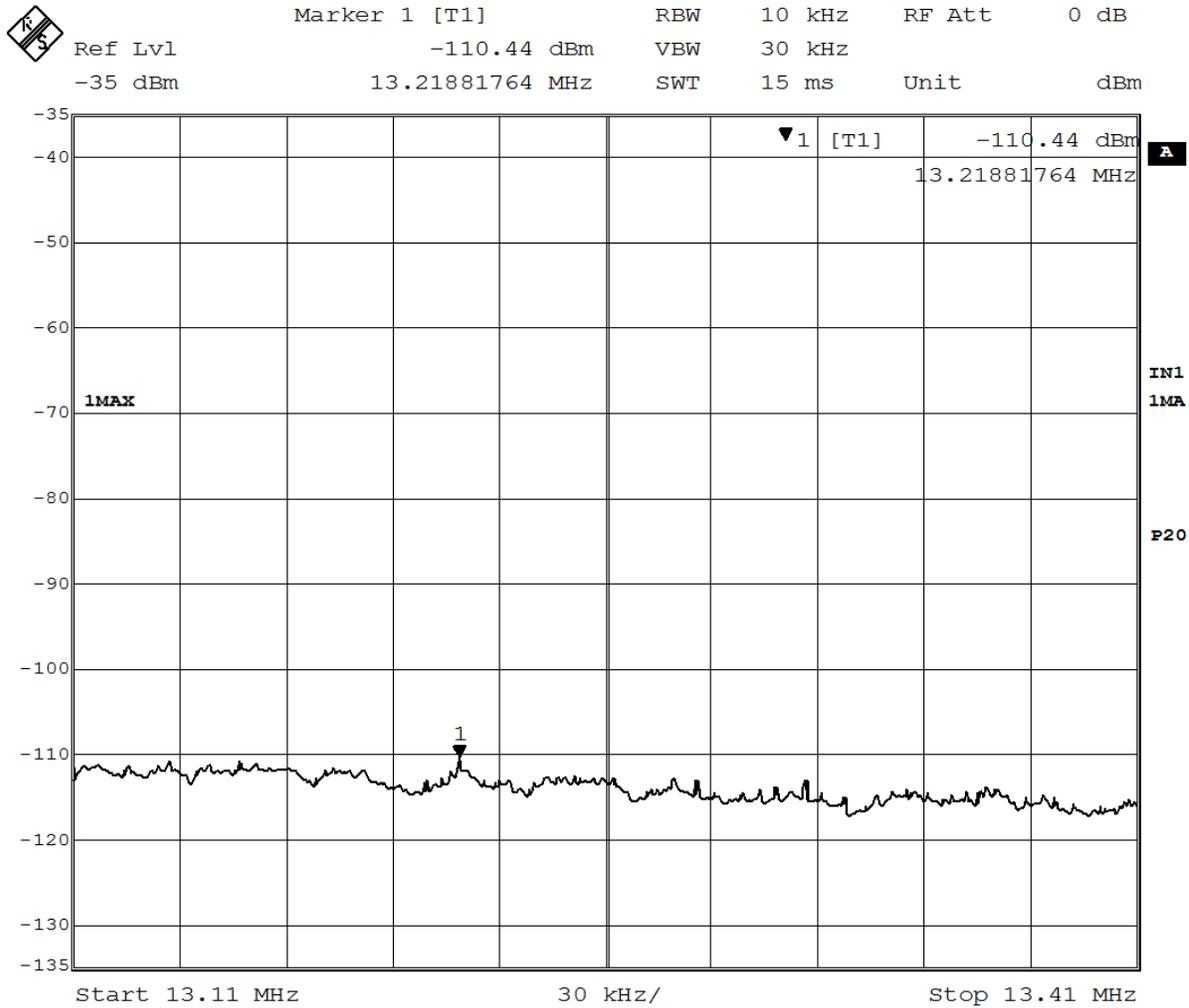

Date: 20.MAY.2019 08:29:18

Figure 5 – Lower Bandedge


	Report Number:	R20181130-20-10	Rev	A
	Prepared for:	Garmin		

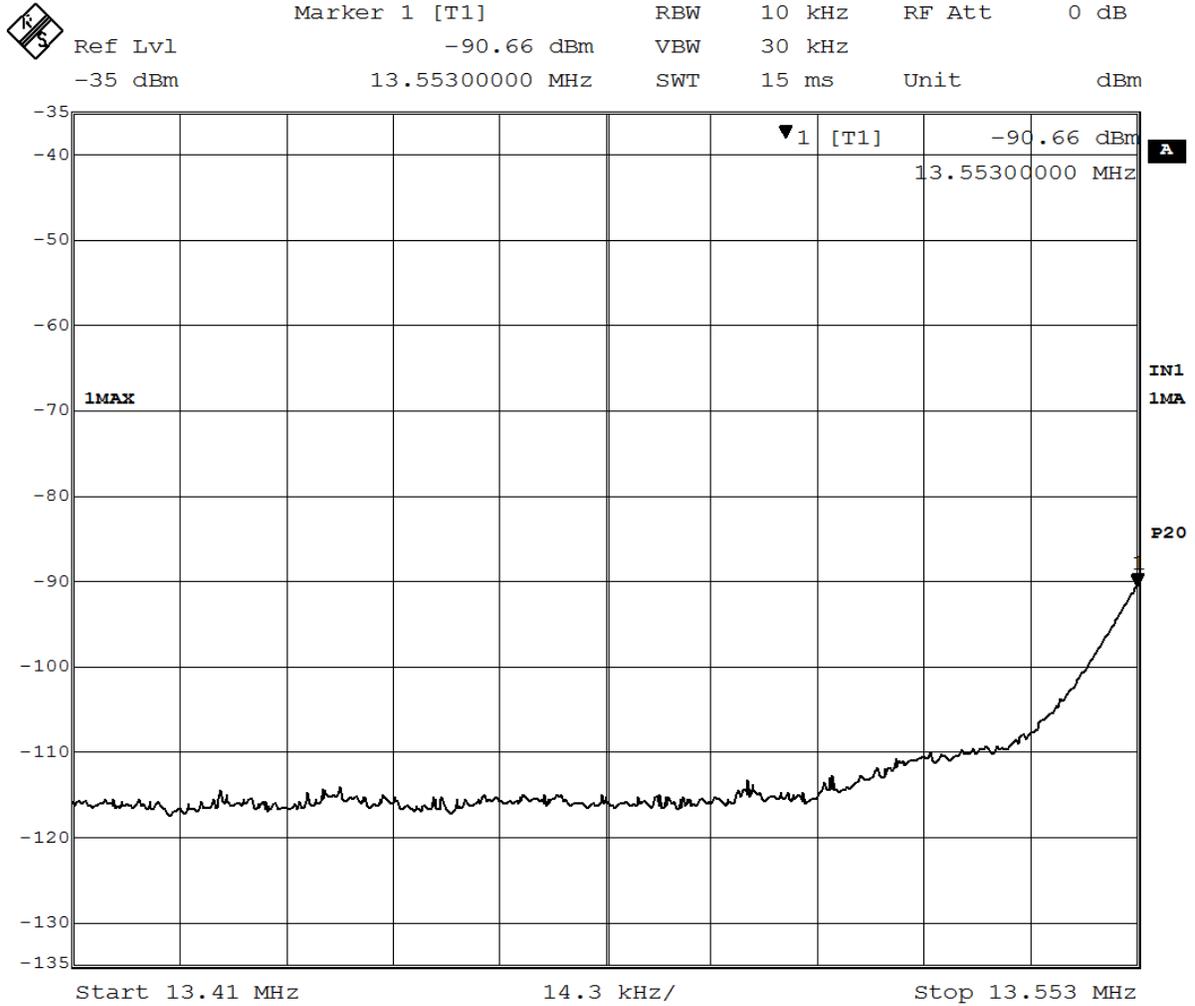

Date: 20.MAY.2019 08:32:22

Figure 6 – Lower Bandedge

	Report Number:	R20181130-20-10	Rev	A
	Prepared for:	Garmin		

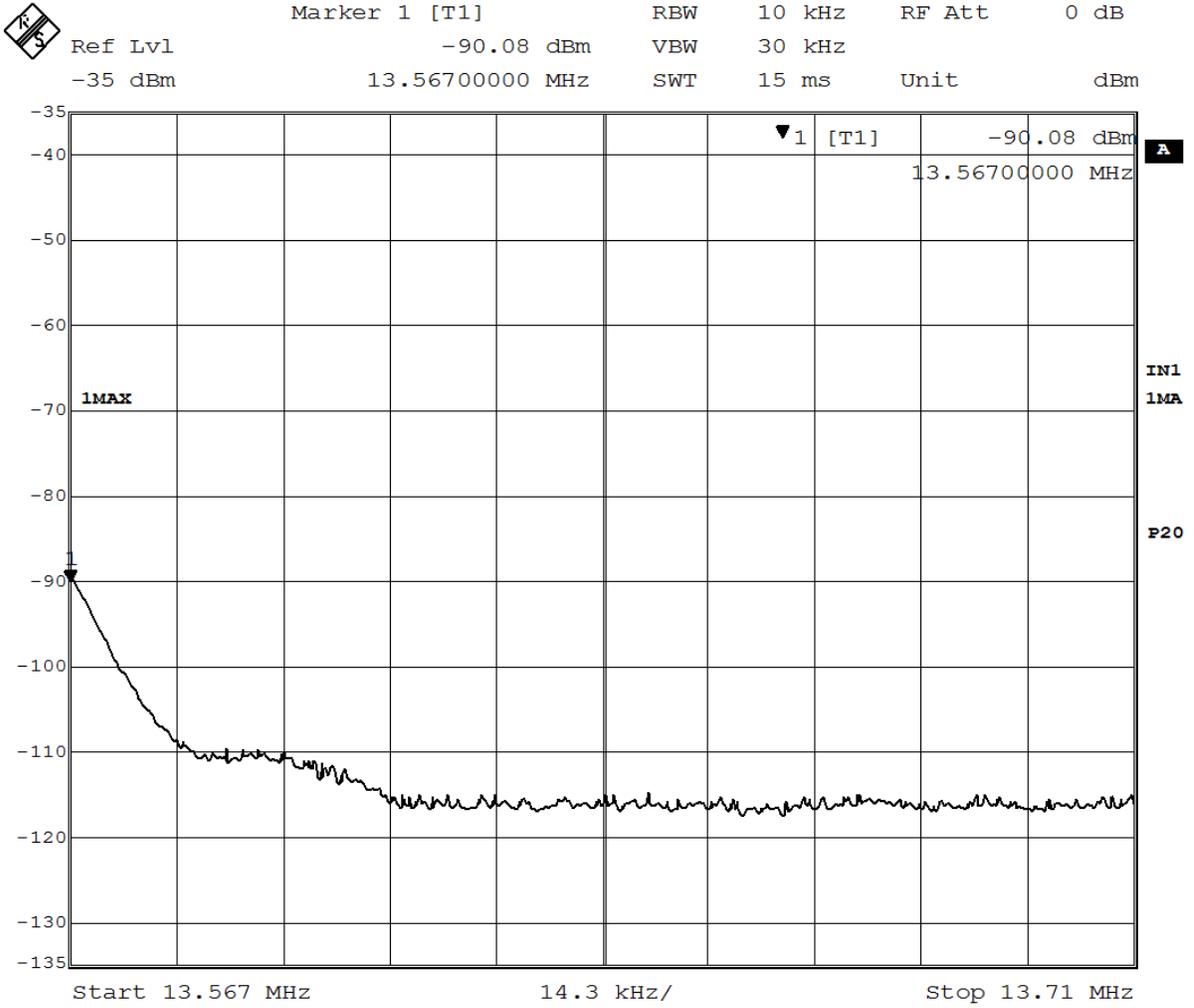

Date: 20.MAY.2019 08:34:51


Figure 7 – Higher Band edge



Report Number:	R20181130-20-10	Rev	A
Prepared for:	Garmin		



Marker 1 [T1] RBW 10 kHz RF Att 0 dB
Ref Lvl -109.85 dBm VBW 30 kHz
-35 dBm 14.00639279 MHz SWT 15 ms Unit dBm

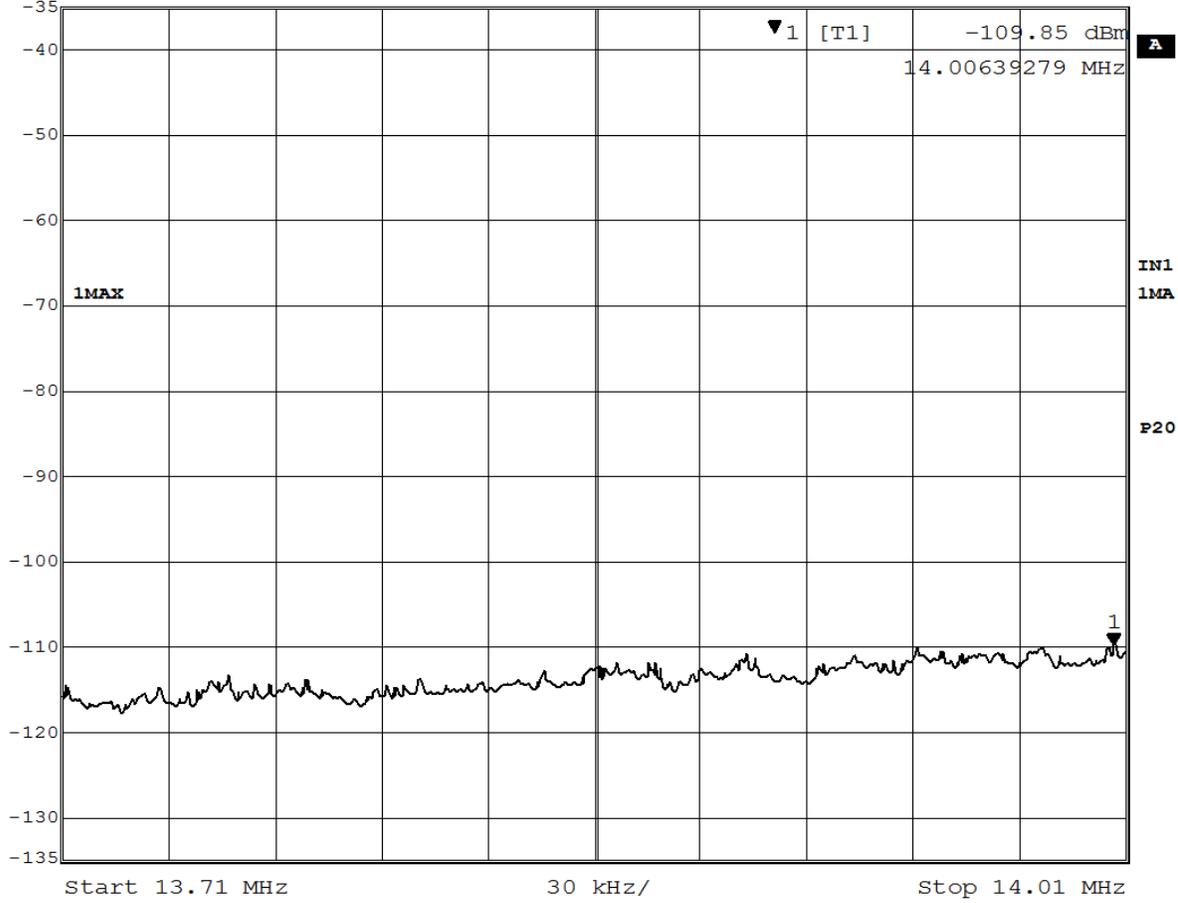

Date: 20.MAY.2019 08:33:28

Figure 8 – Higher Band edge

	Report Number:	R20181130-20-10	Rev	A
	Prepared for:	Garmin		

3.2 Frequency Error

Test:	FCC Part 15.225 (e)		
Test Result:	Complies	Date:	5/20/2019

3.2.1 Test Description

Radiated power was measured on a spectrum analyzer with resolution bandwidth and video bandwidth set to 3 kHz and 10 kHz respectively. The center frequency was found by measuring the frequency of the signal 10dB below the peak on the high and low end of the signal. The frequency half way in between these frequencies was recorded as the center frequency. The temperature was varied from -20°C to -50°C. Limit: 100 PPM on

3.2.2 Test Results

No results were found to be in excess of the limits. A plot of the results can be seen below.

3.2.3 Test Environment

Testing was performed at the NCEE Labs Lincoln facility on the 10-meter chamber ground plane. Laboratory environmental conditions varied slightly throughout the test:

Relative humidity of 30 ± 5%

Temperature of 23 ±2° C

3.2.4 Test Setup

See Section 2.3 for further details.

3.2.5 Test Equipment Used

Serial No.	Manufacturer	Model	Description	Last Cal.
31373	Thermotron	SE1000-5-5	Temp chamber	NA
100007	Rohde & Schwarz	ESIB7	EMI Test Receiver	2018 Jul 31
00024936	EMCO	6512	Loop Antenna	30 Jan 2018*
ID # 2130155	Omega	iTHX-SD	3m Temp. Humidity Meter	2018 Jan 31

*Two Year Calibration Cycle

	Report Number:	R20181130-20-10	Rev	A
	Prepared for:	Garmin		

3.2.6 Test results

Table 4 - Frequency Range Measurements

Temperature (°C)	Channel (MHz)
	13.56000 Nom.
-20°C	13.55996
-10°C	13.55995
0°C	13.55995
10°C	13.55996
20°C	13.56082
30°C	13.55996
40°C	13.55996
50°C	13.55995

Limit: 100 PPM

Table 5 - Voltage Range Measurements

Temperature (°C)	Voltage (VDC)	Channel (MHz)
		13.56000
20°C	3.20	13.56094
20°C	3.90	13.56082
20°C	4.75	13.56000

Voltage ranges provided by the manufacturer, Limit: 100 PPM

	Report Number:	R20181130-20-10	Rev	A
	Prepared for:	Garmin		

3.3 Conducted Emissions

Test Method:	ANSI C63.10-2013, Section(s) 6.2		
Test Result:	Complies	Date:	5/20/2019

3.3.1 Test Description

Conducted emissions measurements were made from 150kHz to 30MHz via a 50µH Line Impedance Stabilization Network (LISN). The results were compared against the limits. Measurements were made on both the line and neutral conductors by first using a spectrum analyzer to acquire the signal spectrum; individual frequencies were then measured using a CISPR 16.1 compliant receiver with the following bandwidth setting:

150kHz – 30MHz: 9kHz IF bandwidth, 5kHz steps

3.3.2 Test Results

No results were found to be in excess of the limits. A plot of the results can be seen below.

3.3.3 Test Environment

Testing was performed at the NCEE Labs Lincoln facility. Laboratory environmental conditions varied slightly throughout the test:

Relative humidity of 30 ± 5%

Temperature of 23 ±2° C

3.3.4 Test Setup

See Section 2.3 for further details.

3.3.5 Test Equipment Used

Serial No.	Manufacturer	Model	Description	Last Cal.
836679/010	Rohde & Schwarz	ESH3-Z5	Artificial Mains	26 Jul 2018
100037	Rohde & Schwarz	ES126	EMI Test Receiver	30 Jan 2018*
2575	Rohde & Schwarz	ES-K1	Software v.1.60	N/A

*Two Year Calibration Cycle

	Report Number:	R20181130-20-10	Rev	A
	Prepared for:	Garmin		

3.3.6 Test Pictures and/or Figures


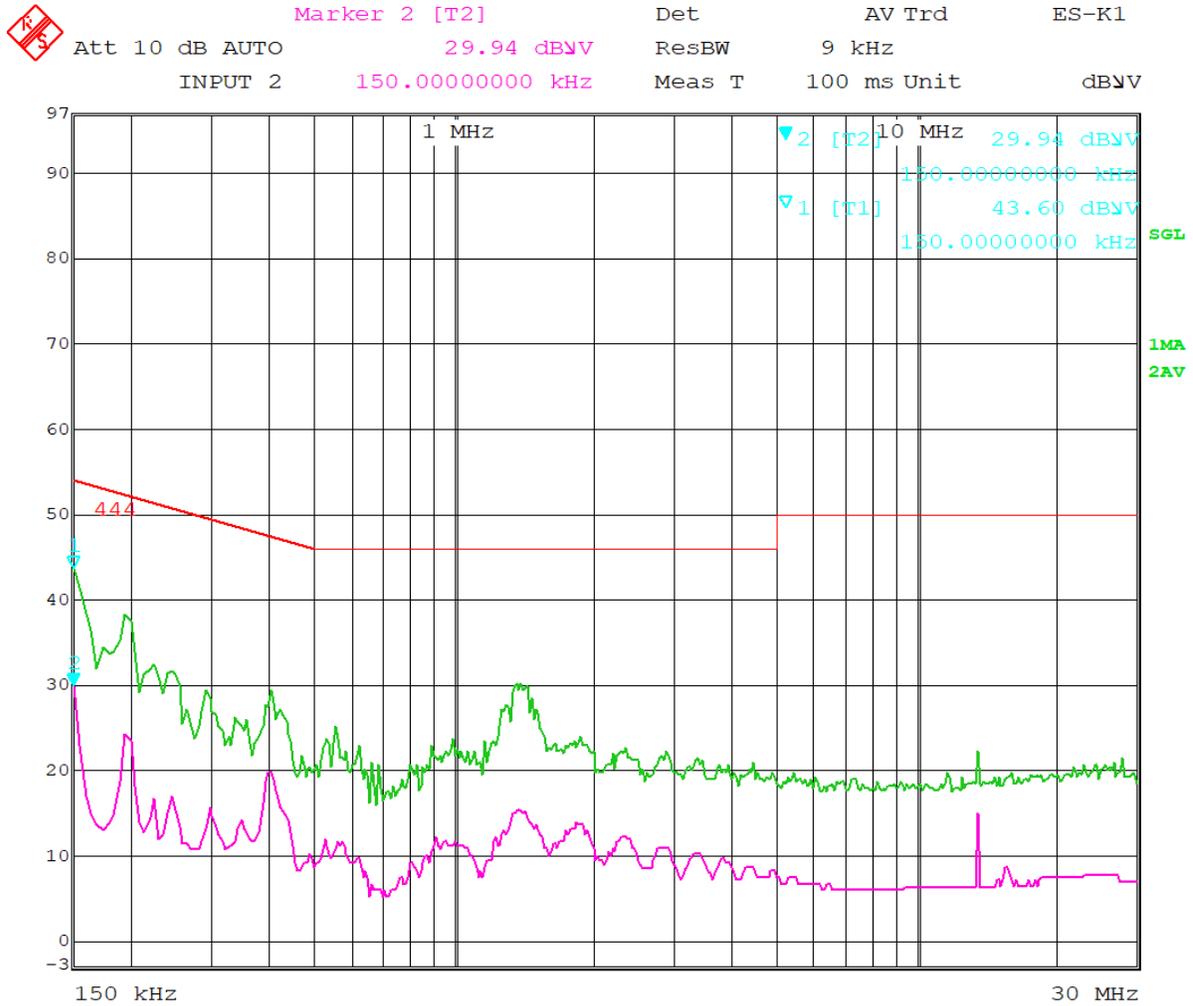


Figure 9 - Conducted Emissions, Line
 All Measurements were found to be at least 10 dB below the limits.

	Report Number:	R20181130-20-10	Rev	A
	Prepared for:	Garmin		

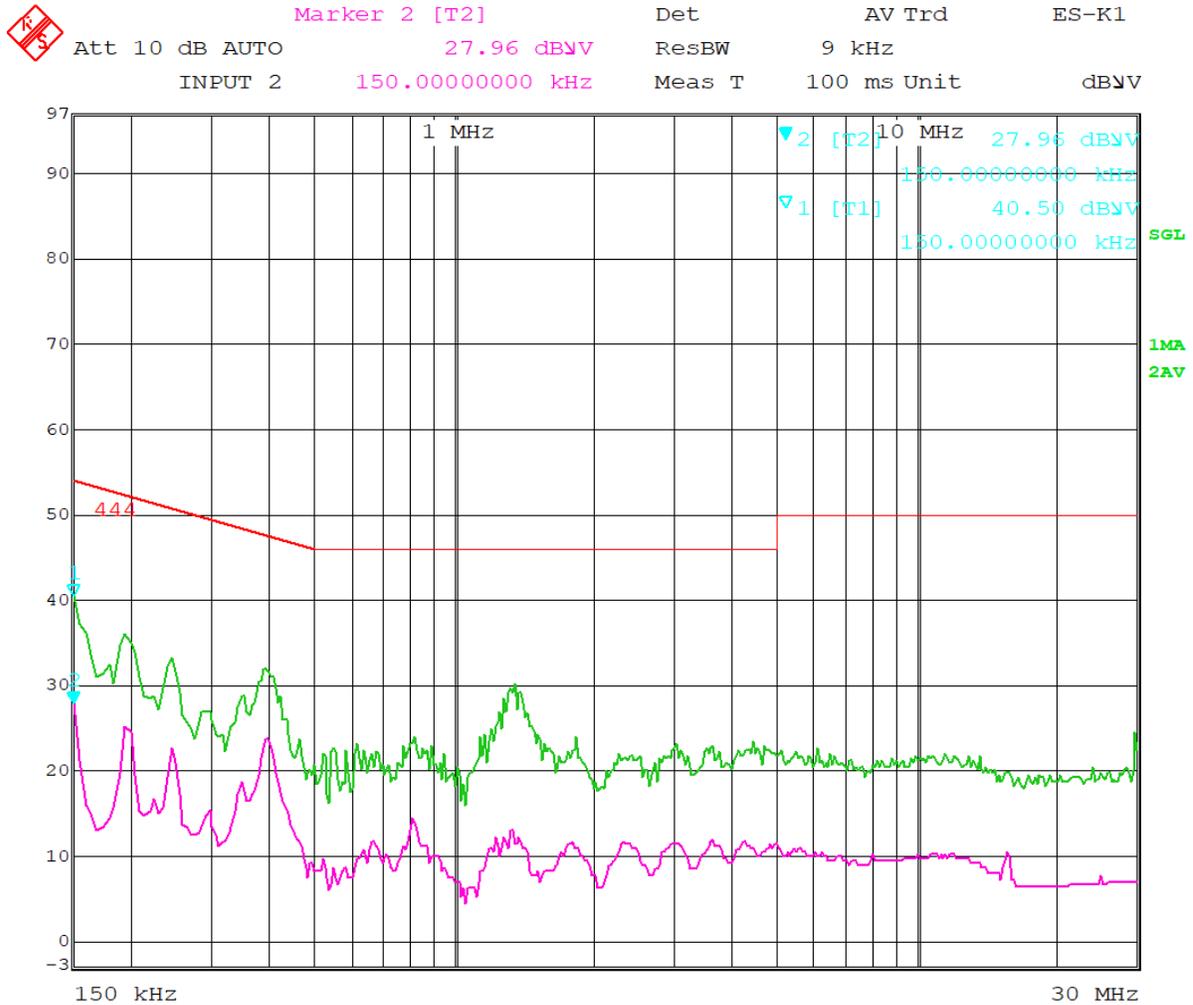

Date: 20.MAY.2019 15:32:24

Figure 10 - Conducted Emissions, Neutral

All Measurements were found to be at least 10 dB below the limits.

	Report Number:	R20181130-20-10	Rev	A
	Prepared for:	Garmin		

Annex A: Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:

Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	±3.82 dB
Radiated Emissions, 3m	1GHz - 18GHz	±4.44 dB
Emissions limits, conducted	30MHz – 18GHz	±3.30 dB
Antenna port conducted	9 kHz – 25 GHz	±0.50 dB

Values were calculated per CISPR 16-4-2:2011

Expanded uncertainty values are calculated to a confidence level of 95%.

	Report Number:	R20181130-20-10	Rev	A
	Prepared for:	Garmin		

Annex B: Sample Field Strength Calculation

Radiated Emissions

The field strength is calculated in decibels (dB) by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = R + AF - (-CF + AG)$$

where FS = Field Strength

R = Receiver Amplitude Receiver reading in dB μ V

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Preamplifier Amplifier Gain

Assume a receiver reading of 55.00 dB μ V is obtained. The Antenna Factor of 12.00 and a Cable Factor of 1.10 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.10 dB μ V/m.

$$FS = 55.00 + 12.00 - (-1.10 + 20.00) = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

Conducted Emissions

Receiver readings are compared directly to the conducted emissions limits in decibels (dB) by adding the cable loss and LISN insertion loss to the receiver reading. The basic equations with a sample calculation is as follows;

$$FS = R + IL - (-CF)$$

where V = Conducted Emissions Voltage Measurement

R = Receiver reading in dB μ V

	Report Number:	R20181130-20-10	Rev	A
	Prepared for:	Garmin		

IL = LISN Insertion Loss

CF = Cable Attenuation Factor

Assume a receiver reading of 52.00 dB μ V is obtained. The LISN insertion loss of 0.80 dB and a Cable Factor of 1.10 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$V = 52.00 + 0.80 - (-1.10) = 53.90 \text{ dB}\mu\text{V/m}$$

The 53.90 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(48.1 \text{ dB}\mu\text{V/m})/20] = 495.45 \mu\text{V/m}$$

*Note: NCEE Labs uses the Rohde and Schwarz ES-K1 software package. In this software, all cable losses are listed as negative. This is why cable loss is subtracting in the preceding equations.

Margin is calculated by taking the limit and subtracting the Field

	Report Number:	R20181130-20-10	Rev	A
	Prepared for:	Garmin		

REPORT END