


FCC Test Report

FCC ID : IPH-05049
Equipment : Outdoor Product
Model No. : A05049
Brand Name : GARMIN
Applicant : Garmin International, Inc.
Address : 1200 E. 151st Street Olathe, KS 66062 United States
Standard : 47 CFR FCC Part 15.249
Received Date : May 13, 2025
Tested Date : May 13 ~ May 19, 2025

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:



Along Chen / Assistant Manager



Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	9
1.6	Deviation from Test Standard and Measurement Procedure.....	9
1.7	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Facility.....	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS.....	11
3.1	Unwanted Emission.....	11
3.2	20dB and Occupied Bandwidth	14
3.3	AC Power Line Conducted Emissions	15
4	TEST LABORATORY INFORMATION	16
 Appendix A. Unwanted Emission		
Appendix B. 20dB and Occupied Bandwidth		
Appendix C. AC Power Line Conducted Emissions		

Release Record

Report No.	Version	Description	Issued Date
FR4O1704AF	Rev. 01	Initial issue	Jun. 05, 2025

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.484MHz 31.21 (Margin -15.06dB) - AV	Pass
15.249(a)	Field Strength of Fundamental	Meet the requirement of limit	Pass
15.249(a)(d)	Field Strength of Harmonics and Emissions Radiated outside of the Specified Frequency Bands	Meet the requirement of limit	Pass
15.215(c)	20dB bandwidth	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Modulation	Ch. Freq. (MHz)	Channel Number	Data Rate
2400-2483.5	GFSK	2402-2480	1-79 [79]	1 Mbps

1.1.2 Antenna Details

Ant. No.	Brand	Model	Type	Connector	Gain (dBi)
1	Garmin	700-00225-10	PIFA	No	-3.27

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5Vdc from host 3.87Vdc from battery
-------------------	--

1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	Battery	Brand: Garmin Model: 361-00157-10 Rating: 3.87Vdc, 221mA
2	USB cable	Brand: GARMIN Model: 320-01602-00 0.56m shielded without core.

1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2402	21	2422	41	2442	61	2462
2	2403	22	2423	42	2443	62	2463
3	2404	23	2424	43	2444	63	2464
4	2405	24	2425	44	2445	64	2465
5	2406	25	2426	45	2446	65	2466
6	2407	26	2427	46	2447	66	2467
7	2408	27	2428	47	2448	67	2468
8	2409	28	2429	48	2449	68	2469
9	2410	29	2430	49	2450	69	2470
10	2411	30	2431	50	2451	70	2471
11	2412	31	2432	51	2452	71	2472
12	2413	32	2433	52	2453	72	2473
13	2414	33	2434	53	2454	73	2474
14	2415	34	2435	54	2455	74	2475
15	2416	35	2436	55	2456	75	2476
16	2417	36	2437	56	2457	76	2477
17	2418	37	2438	57	2458	77	2478
18	2419	38	2439	58	2459	78	2479
19	2420	39	2440	59	2460	79	2480
20	2421	40	2441	60	2461	---	---

1.1.6 Test Tool and Duty Cycle

Test Tool	ANT Test, version: 1.04	
Duty Cycle and Duty Factor	Duty Cycle (%)	Duty Factor (dB)
	94.87%	0.23



1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)		
	2402	2441	2480
ANT+	default	default	default

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Adapter	Samsung	EP-TA800	---	---

1.3 Test Setup Chart

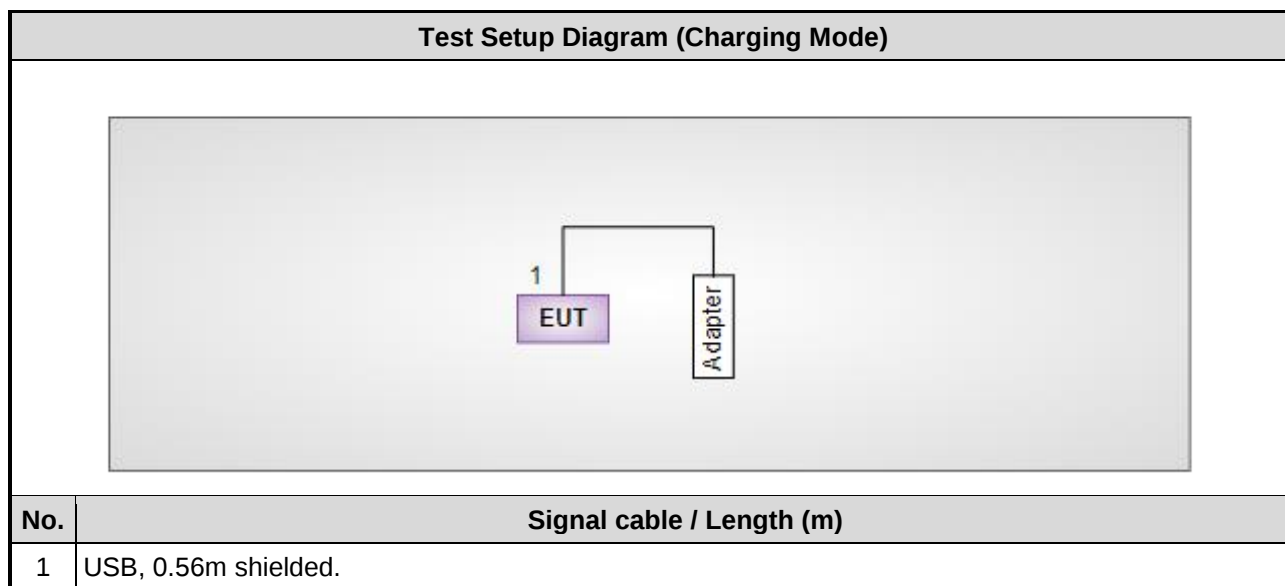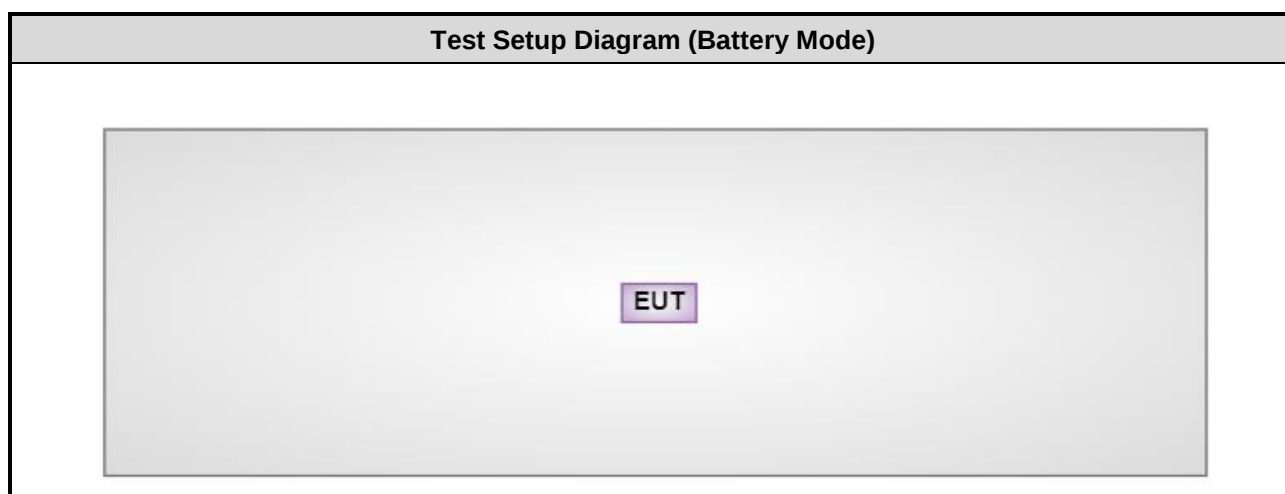

1.4 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	May 13 ~ May 15, 2025				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 11, 2025	Mar. 10, 2026
Spectrum Analyzer	R&S	FSV40	101498	Nov. 12, 2024	Nov. 11, 2025
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 05, 2024	Nov. 04, 2025
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Aug. 09, 2024	Aug. 08, 2025
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Nov. 28, 2024	Nov. 27, 2025
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 18, 2024	Nov. 17, 2025
Preamplifier	EMC	EMC02325	980225	Jun. 17, 2024	Jun. 16, 2025
Preamplifier	EMC	EMC118A45SE	980898	Jul. 05, 2024	Jul. 04, 2025
Preamplifier	EMC	EMC184045SE	980903	Jul. 30, 2024	Jul. 29, 2025
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 02, 2024	Oct. 01, 2025
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 02, 2024	Oct. 01, 2025
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 02, 2024	Oct. 01, 2025
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 02, 2024	Oct. 01, 2025
RF Cable	EMC	EMC104-35M-35M- 8000	210920	Oct. 02, 2024	Oct. 01, 2025
RF Cable	EMC	EMC104-35M-35M- 3000	210922	Oct. 02, 2024	Oct. 01, 2025
Attenuator	Pasternack	PE7005-10	10-1	Oct. 02, 2024	Oct. 01, 2025
HIGHPASS FILTER 3.1-18G	WHK	WHK3.1/18G-10SS	39	Oct. 02, 2024	Oct. 01, 2025
Measurement Software	Sporton	SENSE-EMI	V5.11	NA	NA
Measurement Software	Sporton	SENSE-15247_FS	V5.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	May 19, 2025				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 25, 2025	Feb. 24, 2026
LISN	R&S	ENV216	101579	May 07, 2025	May 06, 2026
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Mar. 21, 2025	Mar. 20, 2026
RF Cable-CON	EMC	EMCCFD300-BM-B M-6000	50821	Oct. 09, 2024	Oct. 08, 2025
50 ohm terminal	NA	50	01	Jun. 19, 2024	Jun. 18, 2025
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.249
ANSI C63.10-2013

1.6 Deviation from Test Standard and Measurement Procedure

None

1.7 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.130 Hz
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.41 dB
Radiated emission > 1GHz	±4.59 dB

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, 03CH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISSED#: 10807A
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Mode
AC Power Line Conducted Emissions	Charging	---	---	2
Field Strength of Fundamental	GFSK	2402, 2441, 2480	1 Mbps	1
Unwanted Emissions $\leq$ 1GHz	GFSK	2480	1 Mbps	1
	Charging	---	---	2
Unwanted Emissions > 1GHz 20dB bandwidth	GFSK	2402, 2441, 2480	1 Mbps	1
NOTE: 1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Z-plane result was found as the worst case and was shown in this report. 2. The test configurations are listed as follows: 1) Mode 1: Battery mode 2) Mode 2: Charging mode				

3 Transmitter Test Results

3.1 Unwanted Emission

This section includes field strength of fundamental, field strength of harmonics and emissions radiated outside of the operating frequency bands.

3.1.1 Limit of field strength of fundamental and field strength of harmonics

Fundamental Frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
2400–2483.5 MHz	50	500

3.1.2 Limit of Unwanted Emissions

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in below table, whichever is the lesser attenuation.

Radiated emission limits			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.1.3 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. Radiated emission below 1GHz
120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission
2. Radiated emission above 1GHz / Peak value except fundamental
RBW=1MHz, VBW=3MHz and Peak detector
3. Radiated emission above 1GHz / Average value for field strength of fundamental and harmonics
The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:

$$20\log (\text{Duty cycle}) = 20\log \frac{0.18841*1 \text{ ms}}{100 \text{ ms}} = -54.5\text{dB}$$


4. Radiated emission above 1GHz / Average value for other emissions
RBW=1MHz, VBW=1/T and Peak detector
5. Radiated emission Peak value for fundamental
RBW=2MHz, VBW=10MHz and Peak detector

3.1.4 Test Setup

Radiated Emissions below 1 GHz

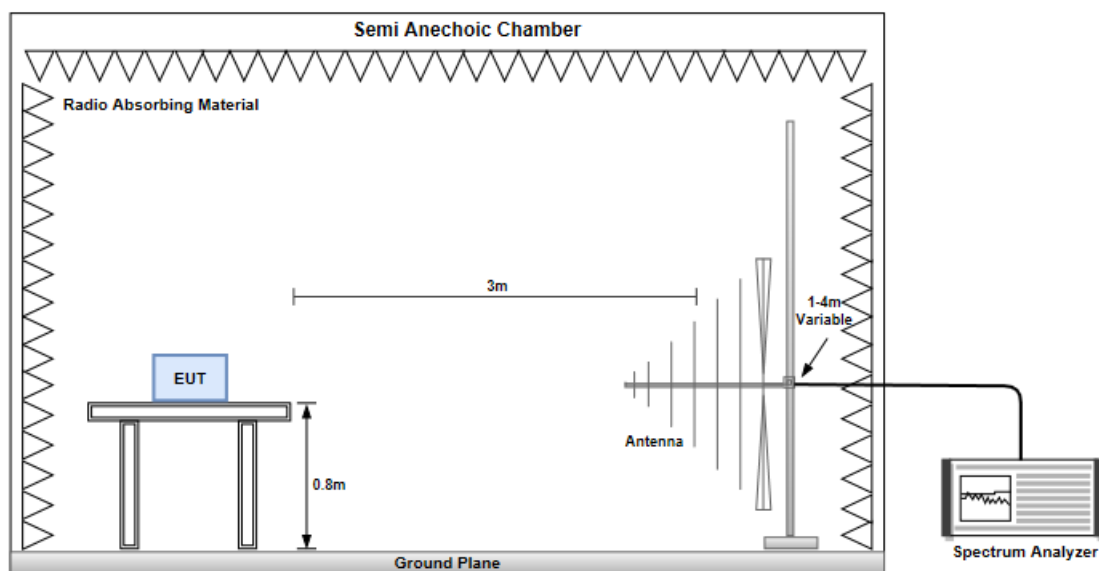

Radiated Emissions above 1 GHz

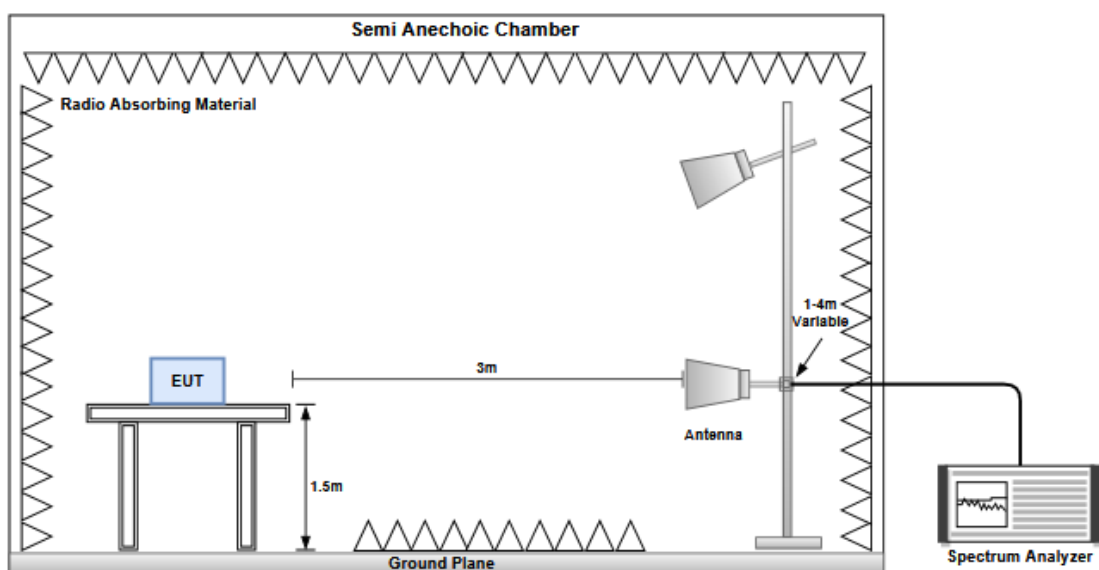

3.1.5 Test Results

Ambient Condition	25-26°C / 61-63%	Tested By	Sean Yu / Allen Lee
--------------------------	------------------	------------------	---------------------


Refer to Appendix A.

3.2 20dB and Occupied Bandwidth

3.2.1 Test Procedures

1. Set resolution bandwidth (RBW) = 20 kHz, Video bandwidth = 100 kHz.
2. Detector = Peak(20 dB bandwidth), Trace mode = max hold
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20dB relative to the maximum level measured in the fundamental emission.
5. Use the occupied measurement function of spectrum analyzer to measure 99% occupied bandwidth.

3.2.2 Test Setup



3.2.3 Test Results

Ambient Condition	26°C / 61%	Tested By	Sean Yu
-------------------	------------	-----------	---------

Refer to Appendix B.

3.3 AC Power Line Conducted Emissions

3.3.1 Limit of AC Power Line Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.3.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

3.3.3 Test Setup

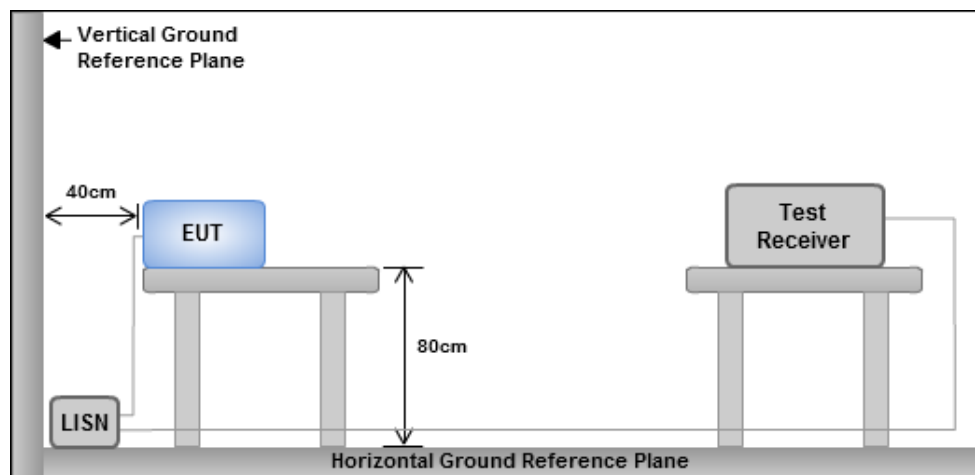

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.3.4 Test Results

Refer to Appendix C.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw

==END==




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	52.1M	22.89	40.00	-17.11	Vertical
Mode 2	Pass	PK	52.7M	28.60	40.00	-11.40	Vertical




Mode 1

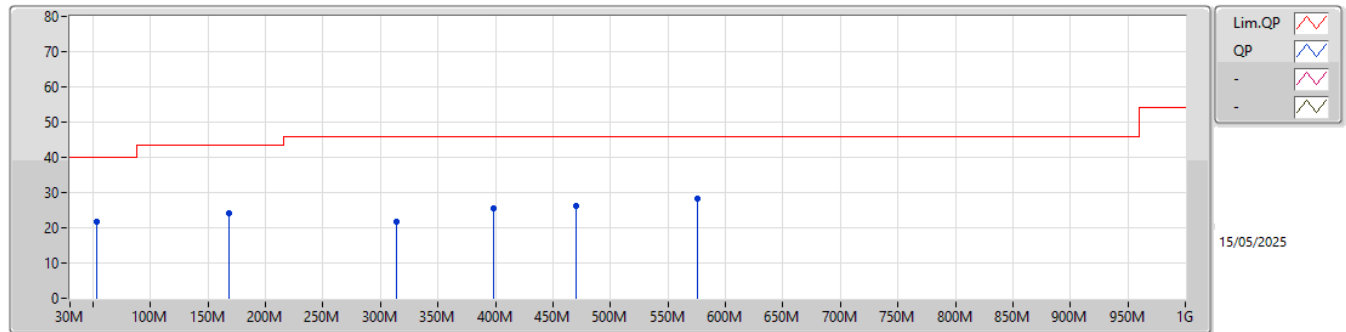


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	52.9M	21.87	40.00	-18.13	-8.23	3	Horizontal	-	-	-	30.10	19.19	0.73	28.15		
PK	168M	24.31	43.50	-19.19	-8.97	3	Horizontal	-	-	-	33.28	18.00	1.29	28.26		
PK	313.5M	21.71	46.00	-24.29	-7.38	3	Horizontal	-	-	-	29.09	19.04	1.80	28.22		
PK	398.6M	25.52	46.00	-20.48	-5.50	3	Horizontal	-	-	-	31.02	20.77	1.90	28.17		
PK	470.4M	26.31	46.00	-19.69	-3.88	3	Horizontal	-	-	-	30.19	22.31	2.00	28.19		
PK	575.3M	28.42	46.00	-17.58	-1.66	3	Horizontal	-	-	-	30.08	24.21	2.31	28.18		

Mode 1

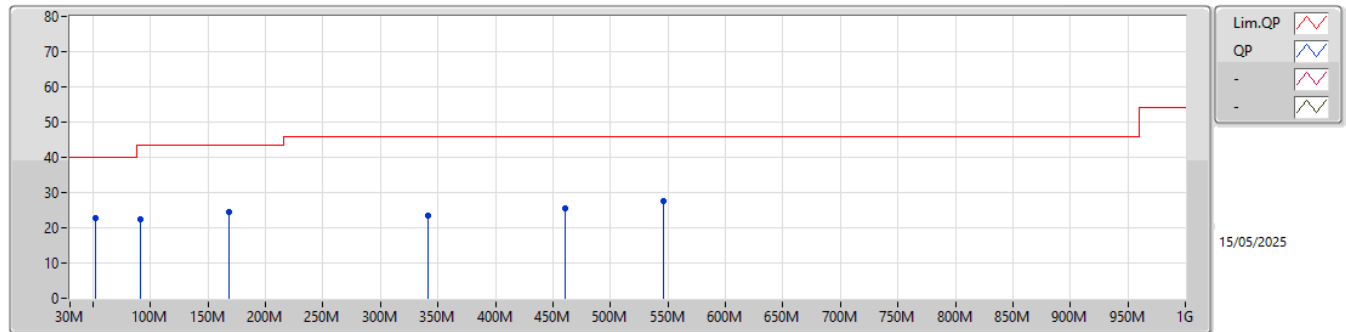


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	52.1M	22.89	40.00	-17.11	-8.30	3	Vertical	-	-	-	31.19	19.11	0.73	28.14		
PK	91.1M	22.41	43.50	-21.09	-14.44	3	Vertical	-	-	-	36.85	12.80	0.97	28.21		
PK	168M	24.43	43.50	-19.07	-8.97	3	Vertical	-	-	-	33.40	18.00	1.29	28.26		
PK	341.7M	23.29	46.00	-22.71	-7.05	3	Vertical	-	-	-	30.34	19.33	1.82	28.20		
PK	460.6M	25.59	46.00	-20.41	-3.99	3	Vertical	-	-	-	29.58	22.21	1.99	28.19		
PK	545.9M	27.46	46.00	-18.54	-2.47	3	Vertical	-	-	-	29.93	23.50	2.22	28.19		

Mode 2

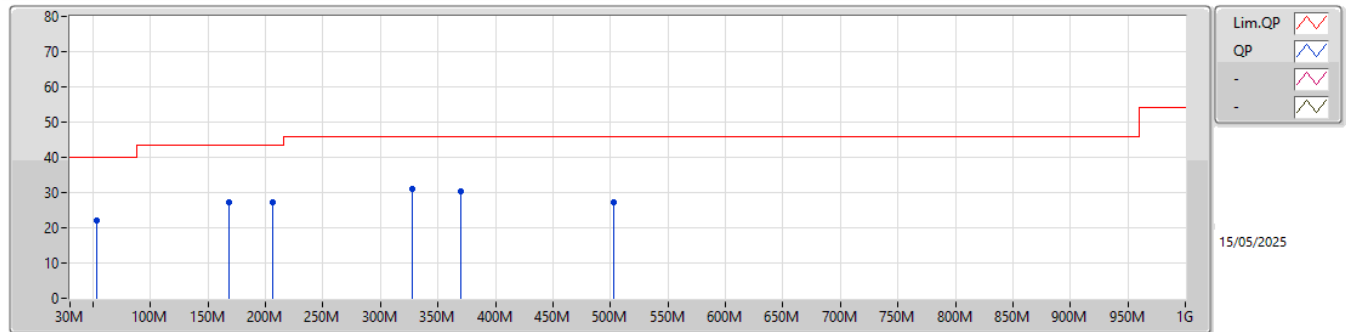

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	53.5M	21.93	40.00	-18.07	-8.26	3	Horizontal	-	-	-	30.19	19.15	0.74	28.15		
PK	168M	27.15	43.50	-16.35	-8.97	3	Horizontal	-	-	-	36.12	18.00	1.29	28.26		
PK	206.1M	27.11	43.50	-16.39	-11.69	3	Horizontal	-	-	-	38.80	15.16	1.43	28.28		
PK	327.2M	31.11	46.00	-14.89	-7.16	3	Horizontal	-	-	-	38.27	19.24	1.81	28.21		
PK	369.6M	30.21	46.00	-15.79	-6.26	3	Horizontal	-	-	-	36.47	20.08	1.85	28.19		
PK	502.5M	27.35	46.00	-18.65	-3.25	3	Horizontal	-	-	-	30.60	22.90	2.05	28.20		

Mode 2

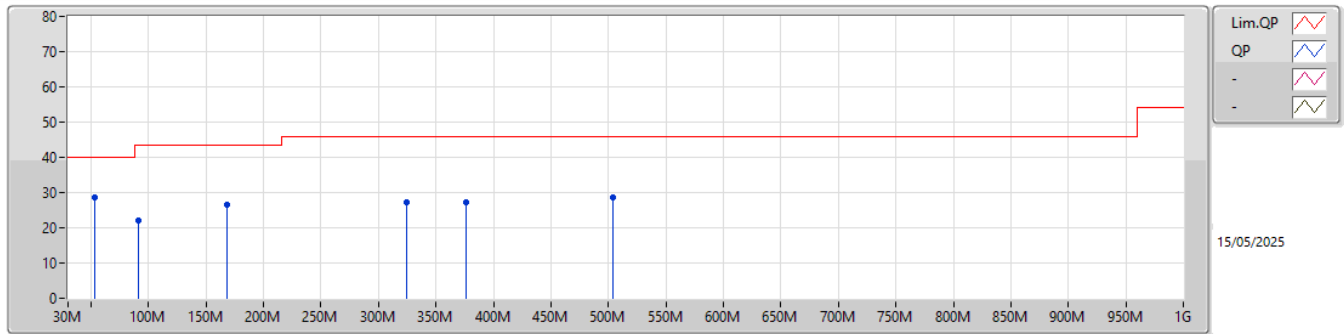

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	52.7M	28.60	40.00	-11.40	-8.24	3	Vertical	-	-	-	36.84	19.17	0.73	28.14		
PK	91.1M	22.18	43.50	-21.32	-14.44	3	Vertical	-	-	-	36.62	12.80	0.97	28.21		
PK	168M	26.71	43.50	-16.79	-8.97	3	Vertical	-	-	-	35.68	18.00	1.29	28.26		
PK	324.5M	27.34	46.00	-18.66	-7.23	3	Vertical	-	-	-	34.57	19.19	1.80	28.22		
PK	376.5M	27.40	46.00	-18.60	-5.96	3	Vertical	-	-	-	33.36	20.36	1.86	28.18		
PK	503.4M	28.47	46.00	-17.53	-3.21	3	Vertical	-	-	-	31.68	22.94	2.05	28.20		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
ANT+ (GFSK)	Pass	AV	2.4G	38.01	54.00	-15.99	3	Vertical	194	2.24	-

2.4-2.4835GHz_ANT+ (GFSK)


2402MHz_TX

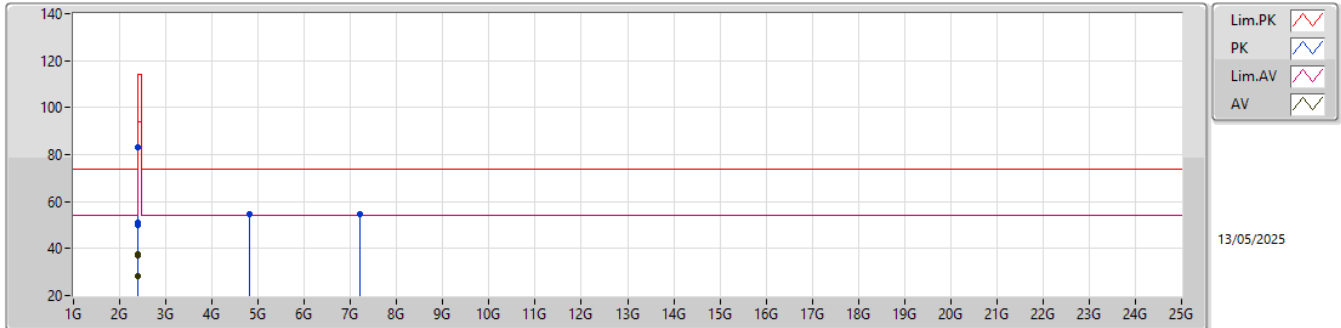

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)				
AV	2.39G	36.96	54.00	-17.04	41.35	3	Horizontal	353	1.40	-	27.80	4.70	36.89				
PK	2.39G	50.12	74.00	-23.88	54.51	3	Horizontal	353	1.40	-	27.80	4.70	36.89				
AV	2.4G	37.49	54.00	-16.51	41.98	3	Horizontal	353	1.40	-	27.70	4.71	36.90				
PK	2.4G	50.90	74.00	-23.10	55.39	3	Horizontal	353	1.40	-	27.70	4.71	36.90				
AV	2.402G	28.35	94.00	-65.65	-	3	Horizontal	-	-	-	-	-	-				
PK	2.402G	82.85	114.00	-31.15	87.35	3	Horizontal	353	1.40	-	27.70	4.71	36.91				
AV	4.804G	0.25	54.00	-53.75	-	3	Horizontal	-	-	-	-	-	-				
PK	4.804G	54.75	74.00	-19.25	55.19	3	Horizontal	162	1.00	-	31.40	6.68	38.52				
AV	7.206G	0.18	54.00	-53.82	-	3	Horizontal	-	-	-	-	-	-				
PK	7.206G	54.68	74.00	-19.32	49.20	3	Horizontal	33	1.00	-	36.12	8.61	39.25				

2.4-2.4835GHz_ANT+ (GFSK)


2402MHz_TX

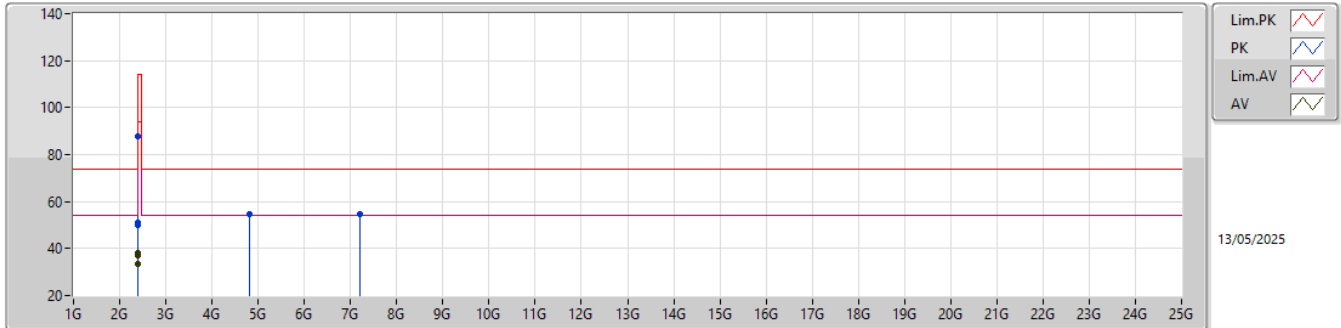

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	2.39G	37.07	54.00	-16.93	41.46	3	Vertical	194	2.24	-	27.80	4.70	36.89			
PK	2.39G	50.18	74.00	-23.82	54.57	3	Vertical	194	2.24	-	27.80	4.70	36.89			
AV	2.4G	38.01	54.00	-15.99	42.50	3	Vertical	194	2.24	-	27.70	4.71	36.90			
PK	2.4G	50.80	74.00	-23.20	55.29	3	Vertical	194	2.24	-	27.70	4.71	36.90			
AV	2.402G	33.45	94.00	-60.55	-	3	Vertical	-	-	-	-	-	-			
PK	2.402G	87.95	114.00	-26.05	92.45	3	Vertical	194	2.24	-	27.70	4.71	36.91			
AV	4.804G	0.13	54.00	-53.87	-	3	Vertical	-	-	-	-	-	-			
PK	4.804G	54.63	74.00	-19.37	55.07	3	Vertical	254	1.00	-	31.40	6.68	38.52			
AV	7.206G	0.14	54.00	-53.86	-	3	Vertical	-	-	-	-	-	-			
PK	7.206G	54.64	74.00	-19.36	49.16	3	Vertical	126	1.00	-	36.12	8.61	39.25			

2.4-2.4835GHz_ANT+ (GFSK)


2441MHz_TX

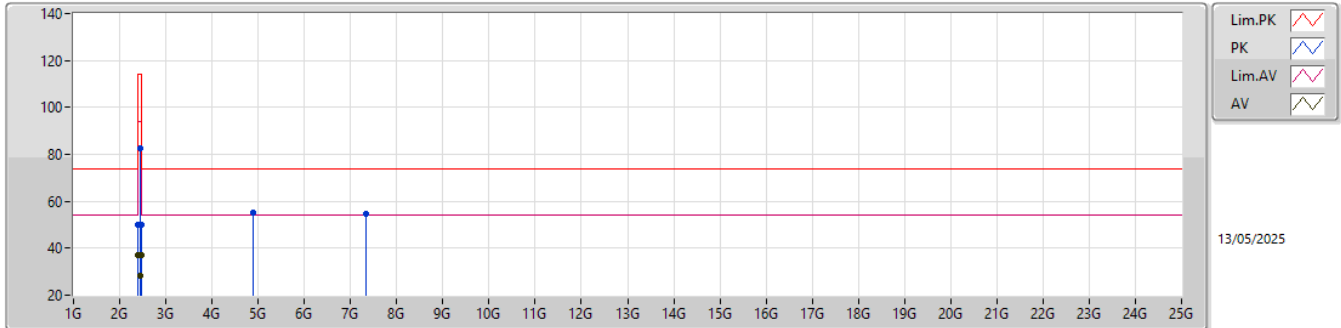

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	2.39G	37.12	54.00	-16.88	41.51	3	Horizontal	336	1.48	-	27.80	4.70	36.89			
PK	2.39G	49.99	74.00	-24.01	54.38	3	Horizontal	336	1.48	-	27.80	4.70	36.89			
AV	2.4G	37.17	54.00	-16.83	41.66	3	Horizontal	336	1.48	-	27.70	4.71	36.90			
PK	2.4G	50.18	74.00	-23.82	54.67	3	Horizontal	336	1.48	-	27.70	4.71	36.90			
AV	2.441G	28.31	94.00	-65.69	-	3	Horizontal	-	-	-	-	-	-			
PK	2.441G	82.81	114.00	-31.19	87.40	3	Horizontal	336	1.48	-	27.59	4.76	36.94			
AV	2.4835G	36.82	54.00	-17.18	41.59	3	Horizontal	336	1.48	-	27.40	4.81	36.98			
PK	2.4835G	49.79	74.00	-24.21	54.56	3	Horizontal	336	1.48	-	27.40	4.81	36.98			
AV	4.882G	0.76	54.00	-53.24	-	3	Horizontal	-	-	-	-	-	-			
PK	4.882G	55.26	74.00	-18.74	55.66	3	Horizontal	158	1.00	-	31.40	6.77	38.57			
AV	7.323G	0.36	54.00	-53.64	-	3	Horizontal	-	-	-	-	-	-			
PK	7.323G	54.86	74.00	-19.14	49.38	3	Horizontal	26	1.00	-	36.25	8.63	39.40			

2.4-2.4835GHz_ANT+ (GFSK)


2441MHz_TX

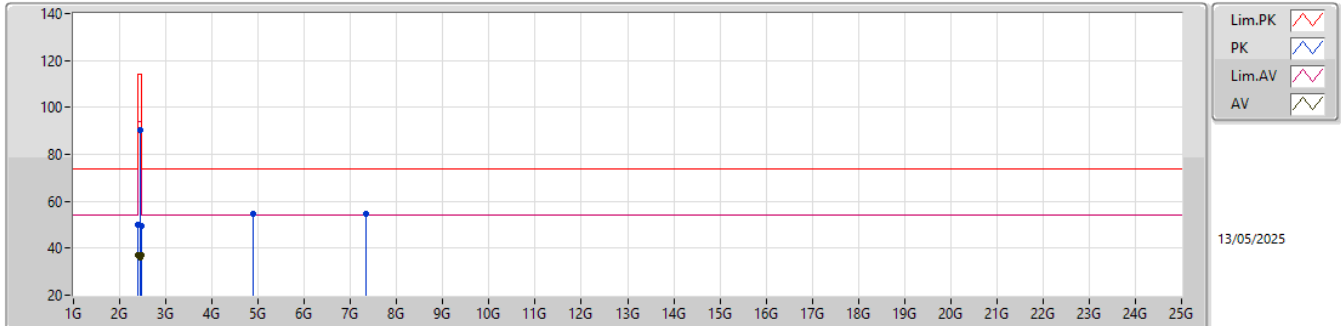

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	2.39G	37.16	54.00	-16.84	41.55	3	Vertical	195	2.20	-	27.80	4.70	36.89			
PK	2.39G	50.00	74.00	-24.00	54.39	3	Vertical	195	2.20	-	27.80	4.70	36.89			
AV	2.4G	37.10	54.00	-16.90	41.59	3	Vertical	195	2.20	-	27.70	4.71	36.90			
PK	2.4G	50.06	74.00	-23.94	54.55	3	Vertical	195	2.20	-	27.70	4.71	36.90			
AV	2.441G	35.95	94.00	-58.05	-	3	Vertical	-	-	-	-	-	-			
PK	2.441G	90.45	114.00	-23.55	95.04	3	Vertical	195	2.20	-	27.59	4.76	36.94			
AV	2.4835G	36.86	54.00	-17.14	41.63	3	Vertical	195	2.20	-	27.40	4.81	36.98			
PK	2.4835G	49.74	74.00	-24.26	54.51	3	Vertical	195	2.20	-	27.40	4.81	36.98			
AV	4.882G	0.34	54.00	-53.66	-	3	Vertical	-	-	-	-	-	-			
PK	4.882G	54.84	74.00	-19.16	55.24	3	Vertical	246	1.00	-	31.40	6.77	38.57			
AV	7.323G	0.09	54.00	-53.91	-	3	Vertical	-	-	-	-	-	-			
PK	7.323G	54.59	74.00	-19.41	49.11	3	Vertical	137	1.00	-	36.25	8.63	39.40			

2.4-2.4835GHz_ANT+ (GFSK)


2480MHz_TX

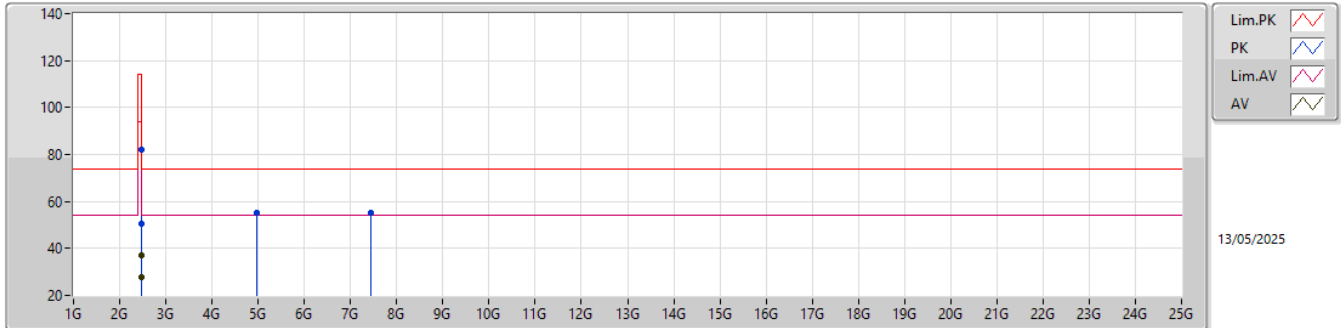



Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	2.48G	27.59	94.00	-66.41	-	3	Horizontal	-	-	-	-	-	-			
PK	2.48G	82.09	114.00	-31.91	86.86	3	Horizontal	1	1.26	-	27.40	4.81	36.98			
AV	2.4835G	37.09	54.00	-16.91	41.86	3	Horizontal	1	1.26	-	27.40	4.81	36.98			
PK	2.4835G	50.38	74.00	-23.62	55.15	3	Horizontal	1	1.26	-	27.40	4.81	36.98			
AV	4.96G	0.51	54.00	-53.49	-	3	Horizontal	-	-	-	-	-	-			
PK	4.96G	55.01	74.00	-18.99	55.33	3	Horizontal	157	1.00	-	31.44	6.86	38.62			
AV	7.44G	0.46	54.00	-53.54	-	3	Horizontal	-	-	-	-	-	-			
PK	7.44G	54.96	74.00	-19.04	49.56	3	Horizontal	30	1.00	-	36.28	8.66	39.54			

2.4-2.4835GHz_ANT+ (GFSK)

2480MHz_TX

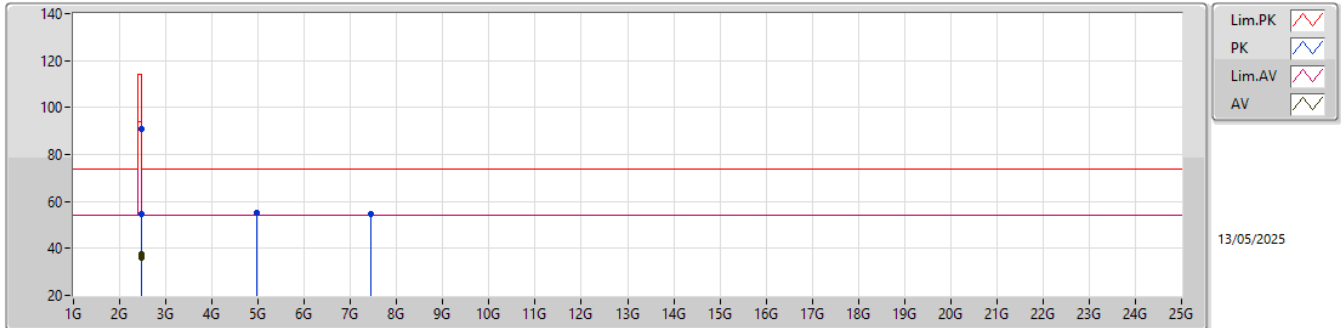


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	2.48G	36.19	94.00	-57.81	-	3	Vertical	-	-	-	-	-	-			
PK	2.48G	90.69	114.00	-23.31	95.46	3	Vertical	200	2.26	-	27.40	4.81	36.98			
AV	2.4835G	37.49	54.00	-16.51	42.26	3	Vertical	200	2.26	-	27.40	4.81	36.98			
PK	2.4835G	54.53	74.00	-19.47	59.30	3	Vertical	200	2.26	-	27.40	4.81	36.98			
AV	4.96G	0.49	54.00	-53.51	-	3	Vertical	-	-	-	-	-	-			
PK	4.96G	54.99	74.00	-19.01	55.31	3	Vertical	255	1.00	-	31.44	6.86	38.62			
AV	7.44G	0.16	54.00	-53.84	-	3	Vertical	-	-	-	-	-	-			
PK	7.44G	54.66	74.00	-19.34	49.26	3	Vertical	126	1.00	-	36.28	8.66	39.54			

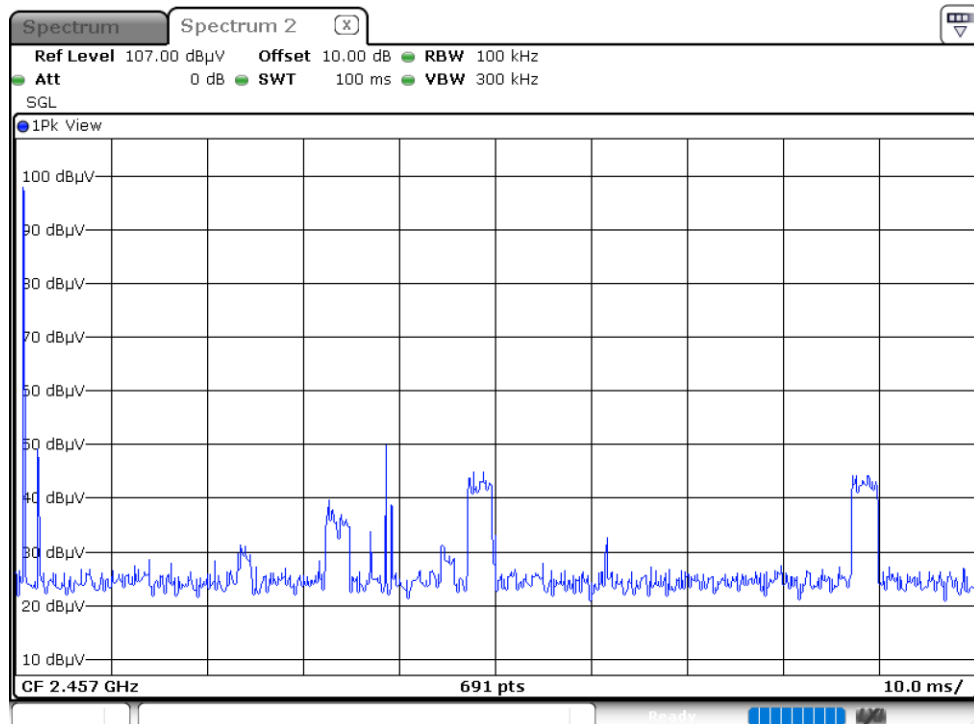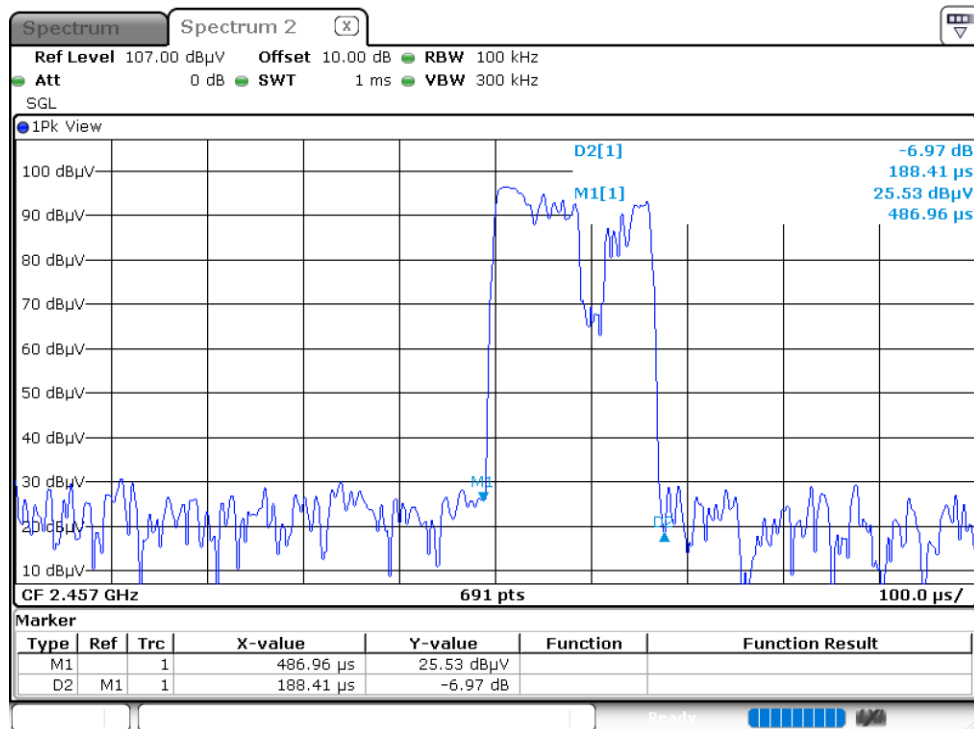


$$20\log (\text{Duty cycle}) = 20\log \frac{0.18841 \times 1 \text{ ms}}{100 \text{ ms}} = -54.5\text{dB}$$



Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
2402	1.056	0.991
2441	1.056	0.999
2480	1.049	0.999

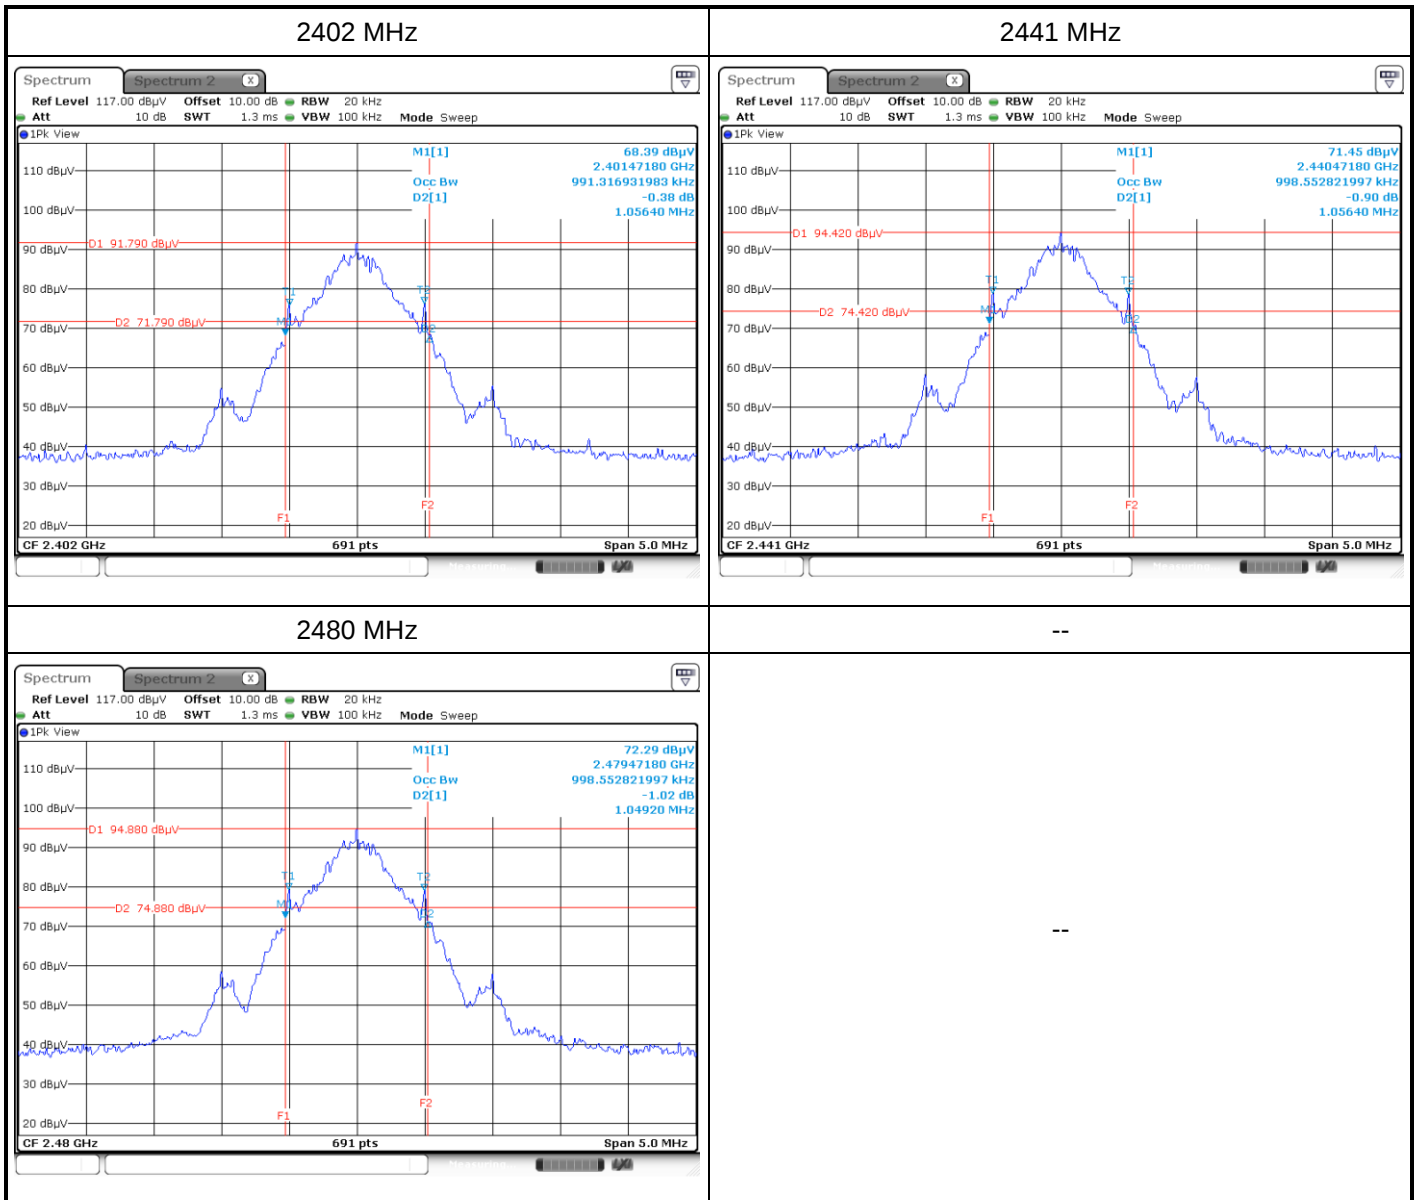

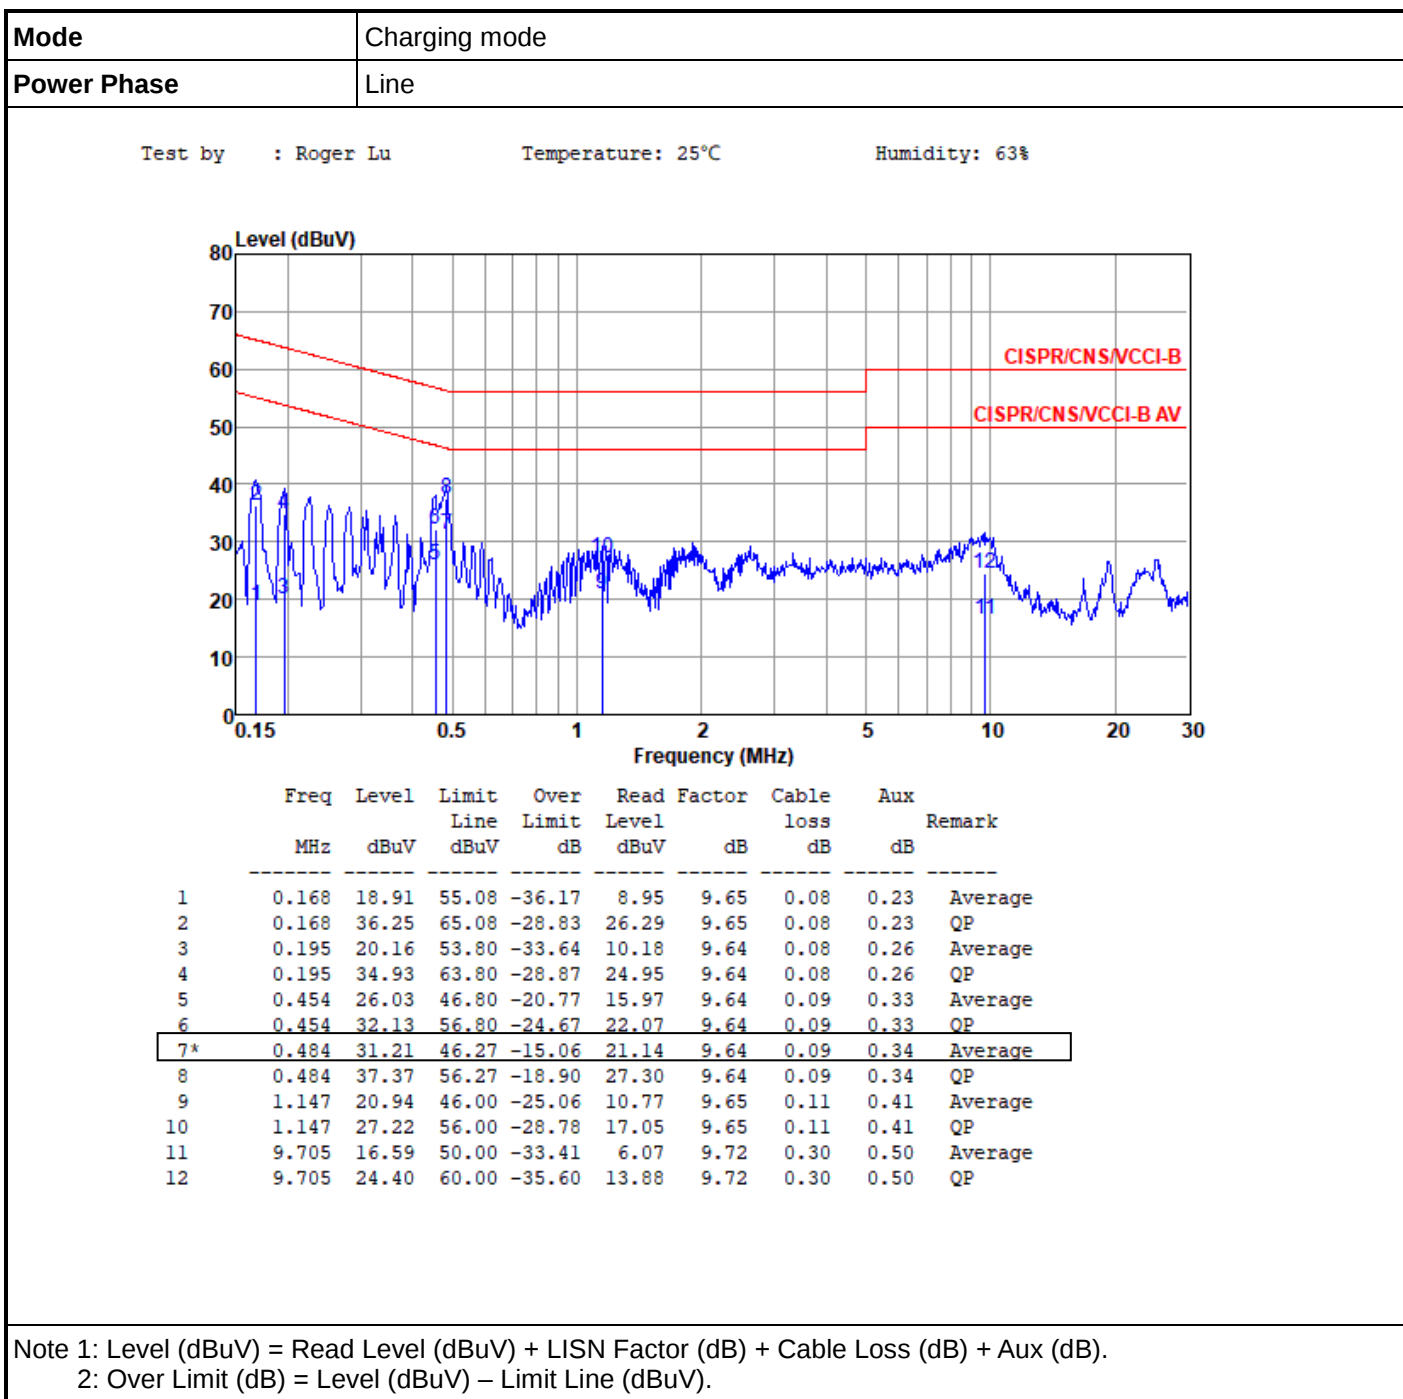

Mode	Charging mode																																																																																																																																																								
Power Phase	Neutral																																																																																																																																																								
Test by : Roger Lu Temperature: 25°C Humidity: 63%																																																																																																																																																									
Level (dBUV) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Cable</th><th>Aux</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>Line</th><th>Limit</th><th>Level</th><th></th><th>loss</th><th></th><th></th></tr><tr><th></th><th></th><th></th><th>dBuV</th><th>dB</th><th>dBuV</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>0.165</td><td>16.72</td><td>55.21</td><td>-38.49</td><td>6.84</td><td>9.64</td><td>0.08</td><td>0.16</td><td>Average</td></tr><tr><td>2</td><td>0.165</td><td>36.20</td><td>65.21</td><td>-29.01</td><td>26.32</td><td>9.64</td><td>0.08</td><td>0.16</td><td>QP</td></tr><tr><td>3</td><td>0.222</td><td>14.35</td><td>52.74</td><td>-38.39</td><td>4.42</td><td>9.64</td><td>0.08</td><td>0.21</td><td>Average</td></tr><tr><td>4</td><td>0.222</td><td>32.07</td><td>62.74</td><td>-30.67</td><td>22.14</td><td>9.64</td><td>0.08</td><td>0.21</td><td>QP</td></tr><tr><td>5</td><td>0.481</td><td>27.27</td><td>46.32</td><td>-19.05</td><td>17.27</td><td>9.63</td><td>0.09</td><td>0.28</td><td>Average</td></tr><tr><td>6*</td><td>0.481</td><td>37.86</td><td>56.32</td><td>-18.46</td><td>27.86</td><td>9.63</td><td>0.09</td><td>0.28</td><td>QP</td></tr><tr><td>7</td><td>1.172</td><td>15.51</td><td>46.00</td><td>-30.49</td><td>5.38</td><td>9.64</td><td>0.12</td><td>0.37</td><td>Average</td></tr><tr><td>8</td><td>1.172</td><td>26.82</td><td>56.00</td><td>-29.18</td><td>16.69</td><td>9.64</td><td>0.12</td><td>0.37</td><td>QP</td></tr><tr><td>9</td><td>1.848</td><td>14.27</td><td>46.00</td><td>-31.73</td><td>4.05</td><td>9.65</td><td>0.16</td><td>0.41</td><td>Average</td></tr><tr><td>10</td><td>1.848</td><td>26.05</td><td>56.00</td><td>-29.95</td><td>15.83</td><td>9.65</td><td>0.16</td><td>0.41</td><td>QP</td></tr><tr><td>11</td><td>9.654</td><td>17.65</td><td>50.00</td><td>-32.35</td><td>7.09</td><td>9.72</td><td>0.30</td><td>0.54</td><td>Average</td></tr><tr><td>12</td><td>9.654</td><td>27.11</td><td>60.00</td><td>-32.89</td><td>16.55</td><td>9.72</td><td>0.30</td><td>0.54</td><td>QP</td></tr></tbody></table>					Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark		MHz	dBuV	Line	Limit	Level		loss						dBuV	dB	dBuV	dB	dB	dB		1	0.165	16.72	55.21	-38.49	6.84	9.64	0.08	0.16	Average	2	0.165	36.20	65.21	-29.01	26.32	9.64	0.08	0.16	QP	3	0.222	14.35	52.74	-38.39	4.42	9.64	0.08	0.21	Average	4	0.222	32.07	62.74	-30.67	22.14	9.64	0.08	0.21	QP	5	0.481	27.27	46.32	-19.05	17.27	9.63	0.09	0.28	Average	6*	0.481	37.86	56.32	-18.46	27.86	9.63	0.09	0.28	QP	7	1.172	15.51	46.00	-30.49	5.38	9.64	0.12	0.37	Average	8	1.172	26.82	56.00	-29.18	16.69	9.64	0.12	0.37	QP	9	1.848	14.27	46.00	-31.73	4.05	9.65	0.16	0.41	Average	10	1.848	26.05	56.00	-29.95	15.83	9.65	0.16	0.41	QP	11	9.654	17.65	50.00	-32.35	7.09	9.72	0.30	0.54	Average	12	9.654	27.11	60.00	-32.89	16.55	9.72	0.30	0.54	QP
	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark																																																																																																																																																
	MHz	dBuV	Line	Limit	Level		loss																																																																																																																																																		
			dBuV	dB	dBuV	dB	dB	dB																																																																																																																																																	
1	0.165	16.72	55.21	-38.49	6.84	9.64	0.08	0.16	Average																																																																																																																																																
2	0.165	36.20	65.21	-29.01	26.32	9.64	0.08	0.16	QP																																																																																																																																																
3	0.222	14.35	52.74	-38.39	4.42	9.64	0.08	0.21	Average																																																																																																																																																
4	0.222	32.07	62.74	-30.67	22.14	9.64	0.08	0.21	QP																																																																																																																																																
5	0.481	27.27	46.32	-19.05	17.27	9.63	0.09	0.28	Average																																																																																																																																																
6*	0.481	37.86	56.32	-18.46	27.86	9.63	0.09	0.28	QP																																																																																																																																																
7	1.172	15.51	46.00	-30.49	5.38	9.64	0.12	0.37	Average																																																																																																																																																
8	1.172	26.82	56.00	-29.18	16.69	9.64	0.12	0.37	QP																																																																																																																																																
9	1.848	14.27	46.00	-31.73	4.05	9.65	0.16	0.41	Average																																																																																																																																																
10	1.848	26.05	56.00	-29.95	15.83	9.65	0.16	0.41	QP																																																																																																																																																
11	9.654	17.65	50.00	-32.35	7.09	9.72	0.30	0.54	Average																																																																																																																																																
12	9.654	27.11	60.00	-32.89	16.55	9.72	0.30	0.54	QP																																																																																																																																																
Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).																																																																																																																																																									