

4740 Discovery Drive | Lincoln, NE 68521 tel- 402.323.6233 | tel -888.657.6860 | fax - 402.323.6238 info@nceelabs.com | http://nceelabs.com

# **FCC/ISED Test Report**

Prepared for: Garmin International, Inc.

Address: 1200 E. 151<sup>st</sup> Street

Olathe, Kansas, 66062, USA

Lane

Product: AA4624

Test Report No: R20220615-20-E5

Approved by:

Fox Lane,

**EMC Test Engineer** 

DATE: November 30, 2022

Total Pages: 141

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.





Report Number:	R20220615-20-E5	Rev	0

Prepared for: Garmin International, Inc.

# REVISION PAGE

Rev. No.	Date	Description	
		Issued by FLane	
0	30 November 2022	Reviewed by KVepuri	
		Prepared by FLane	

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 2 of 141



Report Number:

R20220615-20-E5

Rev

0

#### <u>.</u>

Prepared for:	Garmin	International,	Inc
---------------	--------	----------------	-----

# CONTENTS

Rev	ision Pa	ge	2
1.0	Sum	nmary of test results	4
2.0	EUT	Description	5
	2.1	Equipment under test	
	2.2	Description of test modes	
	2.3	Description of support units	6
3.0	Lab	oratory and General Test Description	7
	3.1	Laboratory description	7
	3.2	Test personnel	7
	3.3	Test equipment	8
	3.4	General Test Procedure and Setup for Radio Measuremnts	9
4.0	Res	ults	10
	4.1	Output Power	
		·	
	4.2	Bandwidth	
	4.3	Power Spectral Density	15
	4.4	Conducted Spurious Emissions	16
	4.5	Conducted AC Mains Emissions	26
	4.6	Duty Cycle	29
	4.7	Radiated emissions	30
	4.8	Band edges	39
	4.9	Antenna Gain	
Ann			
• •		: Sample Calculation	
App	endix B	- Measurement Uncertainty	44
App	endix C	- Graphs and Tables	45
REP	ORT EN	ID	141



Report Number:	R20220615-20-E5	Rev	0
Prenared for:	Garmin International Inc		

### 1.0 SUMMARY OF TEST RESULTS

## FCC Part 15.247 ⊠

The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISED RSS-Gen, Issue 5
- (3) ISED RSS-247, Issue 2

APPLIED STANDARDS AND REGULATIONS			
Standard Section	Test Type	Result	
FCC Part 15.35 RSS Gen, Issue 5, Section 6.10	Duty Cycle	Pass	
FCC Part 15.247(b)(3) RSS-247 Issue 2 Section 5.4(d)	Peak output power	Pass	
FCC Part 15.247(a)(2) RSS-247 Issue 2 Section 5.2	Bandwidth	Pass	
FCC Part 15.209 RSS-Gen Issue 5, Section 7.3	Receiver Radiated Emissions	Pass	
FCC Part 15.209 (restricted bands), 15.247 (unrestricted) RSS-247 Issue 2 Section 5.5, RSS-Gen Issue 5, Section 8.9	Transmitter Radiated Emissions	Pass	
FCC Part 15.247(e) RSS-247 Issue 2 Section 5.2	Power Spectral Density	Pass	
FCC Part 15.209, 15.247(d) RSS-247 Issue 2 Section 5.5	Band Edge Measurement	Pass	
FCC Part 15.207 RSS-Gen Issue 5, Section 8.8	Conducted Emissions	Pass	



Report Number:	R20220615-20-E5	Rev	0
Prepared for:	ared for: Garmin International, Inc.		

### 2.0 EUT DESCRIPTION

### 2.1 EQUIPMENT UNDER TEST

### **Summary and Operating Condition:**

Device under test was a rechargeable battery powered transceiver manufactured by Garmin International, Inc.

EUT	AA4624
IC	1792A-A4624
FCC ID	IPH-A4624
EUT Received	29 August 2022
EUT Tested	5 September 2022- 28 October 2022
Serial No.	3426363242 (Radiated Measurements) 3426363123 (Conducted Measurements)
Operating Band	2400 – 2483.5 MHz
Device Type	☐ GMSK ☐ GFSK ☐ BT BR ☐ BT EDR 2MB ☐ BT EDR 3MB ☐ 802.11x
Power Supply / Voltage	Internal Battery / 5VDC Charger: Garmin (Phi Hong) Model: LACA046 GPN: 362-00112-00 (Representative Power Supply)
Antenna Type / Gain (dBi)	Trace Antenna -3.29 dBi

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive

Lincoln, NE 68521 Page 5 of 141



Report Number:	R20220615-20-E5	Rev	0
Prenared for:	Garmin International Inc		

### 2.2 DESCRIPTION OF TEST MODES

The operating range of the EUT is dependent on the device type found in section 2.1:

The EUT was powered by 5 VDC. It was set to transmit continuously on the 3 different channels of its operating range where available.

For 802.11x Transmissions:

Channel	Frequency
Low	2412 MHz
Mid	2437 MHz
High	2462 MHz

Data Rate				
Modulation Low High				
802.11b	1Mb	11Mb		
802.11g	6Mb	54Mb		
802.11n	MCS0	MCS7		

These are the only representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequency and designations.

The following power table was used for the entirety of testing:

802.11x Power Table				
Modulation	Low	Mid	High	
802.11b	42	42	42	
802.11g	33	42	33	
802.11n	32	42	32	

### 2.3 DESCRIPTION OF SUPPORT UNITS

None

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 6 of 141



 Report Number:
 R20220615-20-E5
 Rev
 0

Prepared for: | Garmin International, Inc.

### 3.0 LABORATORY AND GENERAL TEST DESCRIPTION

### 3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs) 4740 Discovery Drive Lincoln, NE 68521

A2LA Certificate Number: 1953.01 FCC Accredited Test Site Designation No: US1060 Industry Canada Test Site Registration No: 4294A NCC CAB Identification No: US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of  $35 \pm 4\%$ Temperature of  $22 \pm 3^{\circ}$  Celsius



### 3.2 TEST PERSONNEL

No.	PERSONNEL	TITLE	ROLE
	AP - L.L.	Table to INA	De la la la Rica
1	Nic Johnson	Technical Manager	Review/editing
2	Fox Lane	Test Engineer	Testing/Review and Report
3	Blake Winter	Test Engineer	Testing
4	Grace Larsen	Test Engineer	Testing and Report
5	Ethan Schmidt	Test Technician	Testing

### Notes:

All personnel are permanent staff members of NCEE Labs. No testing or review was sub-contracted or performed by sub-contracted personnel.

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive

Lincoln, NE 68521 Page 7 of 141



Prepared for: Garmin International, Inc.

### 3.3 TEST EQUIPMENT

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Keysight MXE Signal Analyzer (44GHz)**	N9038A	MY59050109	July 19, 2022	July 19, 2024
Keysight MXE Signal Analyzer (26.5GHz)**	N9038A	MY56400083	July 19, 2022	July 19, 2024
Keysight EXA Signal Analyzer**	N9010A	MY56070862	July 20, 2021	July 20, 2023
SunAR RF Motion	JB1	A082918-1	July 26, 2022	July 26, 2023
ETS EMCO Red Horn Antenna	3115	00218655	July 21, 2022	July 21, 2023
Com-Power LISN, Single Phase**	LI-220C	20070017	July 18, 2022	July 18, 2024
8447F POT H64 Preamplifier*	8447F POT H64	3113AD4667	March 21, 2022	March 21, 2024
Rohde & Schwarz Preamplifier*	TS-PR18	3545700803	August 22, 2022	August 22, 2024
Trilithic High Pass Filter*	6HC330	23042	March 21, 2022	March 21, 2024
ETS – Lindgren- VSWR on 10m Chamber***	10m Semi- anechoic chamber- VSWR	4740 Discovery Drive	July 30, 2020	July 30, 2023
NCEE Labs-NSA on 10m Chamber*	10m Semi- anechoic chamber- NSA	NCEE-001	May 25, 2022	May 25, 2024
TDK Emissions Lab Software	V11.25	700307	NA	NA
RF Cable (preamplifier to antenna)*	MFR-57500	90-195-040	August 22, 2022	August 22, 2024
RF Cable (antenna to 10m chamber bulkhead)*	FSCM 64639	01E3872	September 24, 2021	September 24, 2023
RF Cable (10m chamber bulkhead to control room bulkhead)*	FSCM 64639	01E3864	September 24, 2021	September 24, 2023
RF Cable (control room bulkhead to test receiver)*	FSCM 64639	01F1206	September 24, 2021	September 24, 2023
N connector bulkhead (10m chamber)*	PE9128	NCEEBH1	September 24, 2021	September 24, 2023
N connector bulkhead (control room)*	PE9128	NCEEBH2	September 24, 2021	September 24, 2023

<sup>\*</sup>Internal Characterization

### Notes:

All equipment is owned by NCEE Labs and stored permanently at NCEE Labs facilities.

Lincoln, NE 68521 Page 8 of 141

<sup>\*\*2</sup> Year Cal Cycle



### 3.4 GENERAL TEST PROCEDURE AND SETUP FOR RADIO MEASUREMNTS

Measurement type presented in this report (Please see the checked box below):

### Conducted

The conducted measurements were performed by connecting the output of the transmitter directly into a spectrum analyzer using an impedance matched cable and connector soldered to the EUT in place of the antenna. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.



Figure 1 - Bandwidth Measurements Test Setup

### Radiated ⊠

All the radiated measurements were taken at a distance of 3m from the EUT. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

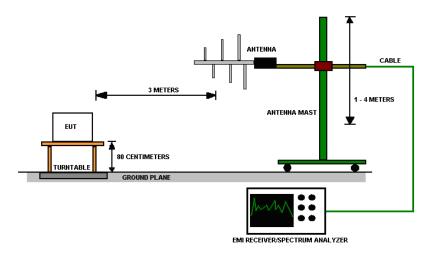


Figure 2 - Radiated Emissions Test Setup

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 9 of 141



Prepared for: Garmin International, Inc.

## 4.0 RESULTS

		DTS Rad	lio Measureme	ents, Low Data R	ate									
CHANNEL	Transmitter	Occupied Bandwidth (MHz)	6 dB Bandwidth (MHz)	AVERAGE OUTPUT POWER (dBm)	AVERAGE OUTPUT POWER (mW)	PSD (dBm)	RESULT							
Low	802.11 b	15.19	10.06	15.380	34.514	0.755	PASS							
Mid	802.11 b	15.19	10.06	15.010	31.696	0.595	PASS							
High	802.11 b	15.49	10.06	16.740	47.206	2.226	PASS							
Low	802.11 g	16.76	16.46	13.940	24.774	-9.423	PASS							
Mid	802.11 g	16.96	16.50	15.530	35.727	-8.139	PASS							
High	802.11 g	16.88	16.50	14.120	25.823	-8.951	PASS							
Low	802.11 n	17.599	17.63	13.5	22.387	-11.124	PASS							
Mid	802.11 n	17.616	17.65	14.38	27.416	-9.951	PASS							
High	802.11 n	17.634	17.63	13.3	21.380	-11.155	PASS							
Occupied Ba	andwidth = $N/A$ ;	6 dB Bandwidth Li	mit = 500 kHz	Peak Output Po	wer Limit = 30	dBm; PSD Li	mit = 8 dBm							
		DTS Pad	io Massurama	nte High Data P	DTS Radio Measurements High Data Rate									

	DTS Radio Measurements, High Data Rate									
CHANNEL	Transmitter	Occupied Bandwidth (MHz)	6 dB Bandwidth (MHz)	AVERAGE OUTPUT POWER (dBm)	AVERAGE OUTPUT POWER (mW)	PSD (dBm)	RESULT			
Low	802.11 b	14.73	8.94	14.770	29.992	-7.901	PASS			
Mid	802.11 b	14.70	9.01	14.700	29.512	-8.107	PASS			
High	802.11 b	14.88	9.04	16.510	44.771	-6.363	PASS			
Low	802.11 g	16.58	16.53	11.150	13.032	-12.525	PASS			
Mid	802.11 g	16.57	16.51	10.750	11.885	-13.459	PASS			
High	802.11 g	16.60	16.52	10.770	11.940	-13.149	PASS			
Low	802.11 n	17.56	17.53	5.340	3.420	-14.501	PASS			
Mid	802.11 n	17.53	17.66	5.030	3.184	-14.683	PASS			
High	802.11 n	17.54	17.65	5.130	3.258	-15.051	PASS			
Occupied Ba	andwidth = $N/A$ ;	6 dB Bandwidth Li	mit = 500 kHz	Peak Output Po	wer Limit = 30	dBm; PSD Li	mit = 8 dBm			

	Unrestricted Band-Edge, Low Data Rate										
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level (dBuV)	Relative Fundamental (dBuV)	Delta (dB)	Min Delta (dB)	Result				
Low	802.11 b	2390.00	80.71	113.34	32.64	30.00	PASS				
Low	802.11 g	2390.00	75.71	108.24	32.53	30.00	PASS				
Low	802.11 n	2390.00	77.28	108.59	31.31	30.00	PASS				
High	802.11 b	2483.50	59.89	114.74	54.85	30.00	PASS				
High	802.11 g	2483.50	77.17	108.87	31.69	30.00	PASS				
High	802.11 n	2483.50	77.23	108.03	30.80	30.00	PASS				

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive

Lincoln, NE 68521



Prepared for: Garmin International, Inc.

	Unrestricted Band-Edge, High Data Rate										
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level (dBuV)	Relative Fundamental (dBuV)	Delta (dB)	Min Delta (dB)	Result				
Low	802.11 b	2400.00	80.52	113.41	32.89	30.00	PASS				
Low	802.11 g	2400.00	74.01	106.45	32.45	30.00	PASS				
Low	802.11 n	2400.00	70.78	104.99	34.21	30.00	PASS				
High	802.11 b	2483.50	69.88	114.87	44.99	30.00	PASS				
High	802.11 g	2483.50	66.50	105.53	39.03	30.00	PASS				
High	802.11 n	2483.50	65.16	104.94	39.78	30.00	PASS				

	Peak Restricted Band-Edge, Low Data Rate										
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result				
Low	802.11 b	2390.00	55.56	Peak	73.98	18.42	PASS				
Low	802.11 g	2390.00	66.01	Peak	73.98	7.97	PASS				
Low	802.11 n	2390.00	60.50	Peak	73.98	13.48	PASS				
High	802.11 b	2483.50	55.08	Peak	73.98	18.90	PASS				
High	802.11 g	2483.50	70.36	Peak	73.98	3.63	PASS				
High	802.11 n	2483.50	69.30	Peak	73.98	4.68	PASS				

<sup>\*</sup>Limit shown is the peak limit taken from FCC Part 15.209

## **Average Restricted Band-Edge, Low Data Rate**

CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	44.84	Average	53.98	9.14	PASS
Low	802.11 g	2390.00	52.91	Average	53.98	1.07	PASS
Low	802.11 n	2390.00	53.71	Average	53.98	0.27	PASS
High	802.11 b	2483.50	43.84	Average	53.98	10.14	PASS
High	802.11 g	2483.50	53.05	Average	53.98	0.93	PASS
High	802.11 n	2483.50	53.09	Average	53.98	0.89	PASS
*Limit shown i	s the averag	e limit taken from	FCC Part 15.209				



Prepared for: Garmin International, Inc.

	Peak Restricted Band-Edge, High Data Rate										
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result				
Low	802.11 b	2390.00	56.16	Peak	73.98	17.82	PASS				
Low	802.11 g	2390.00	64.71	Peak	73.98	9.28	PASS				
Low	802.11 n	2390.00	63.53	Peak	73.98	10.45	PASS				
High	802.11 b	2483.50	54.81	Peak	73.98	19.17	PASS				
High	802.11 g	2483.50	60.85	Peak	73.98	13.13	PASS				
High	802.11 n	2483.50	58.20	Peak	73.98	15.78	PASS				

<sup>\*</sup>Limit shown is the peak limit taken from FCC Part 15.209

# Average Restricted Band-Edge, High Data Rate

CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	44.84	Average	53.98	9.14	PASS
Low	802.11 g	2390.00	48.97	Average	53.98	5.01	PASS
Low	802.11 n	2390.00	47.50	Average	53.98	6.48	PASS
High	802.11 b	2483.50	43.38	Average	53.98	10.60	PASS
High	802.11 g	2483.50	45.57	Average	53.98	8.41	PASS
High	802.11 n	2483.50	44.27	Average	53.98	9.71	PASS

<sup>\*</sup>Limit shown is the average limit taken from FCC Part 15.209



 Report Number:
 R20220615-20-E5
 Rev
 0

Prepared for: Garmin International, Inc.

### 4.1 OUTPUT POWER

**Test Method**: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

### Limits of power measurements:

### For FCC Part 15.247 Device:

The maximum allowed peak output power is 30 dBm.

### Test procedures:

Details can be found in section 3.4 of this report.

### **Deviations from test standard:**

No deviation.

### Test setup:

Details can be found in section 3.4 of this report.

### **EUT operating conditions:**

Details can be found in section 2.1 of this report.

### Test results:

### **Pass**

### Comments:

- 1. All the output power plots can be found in the Appendix C.
- 2. All the measurements were found to be compliant.
- 3. Results were all within measurement tolerance.

Lincoln, NE 68521 Page 13 of 141



Report Number:	R20220615-20-E5	Rev	0
Prenared for:	Garmin International Inc		

#### **BANDWIDTH** 4.2

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

### Limits of bandwidth measurements:

### For FCC Part 15.247 Device:

The 99% occupied bandwidth is for informational purpose only. The 6dB bandwidth of the signal must be greater than 500 kHz.

### Test procedures:

Details can be found in section 3.4 of this report.

### **Deviations from test standard:**

No deviation.

### Test setup:

Test setup details can be found in section 3.4 of this report.

### **EUT operating conditions:**

Details can be found in section 2.1 of this report.

### Test results:

### **Pass**

Comments:

- 1. All the bandwidth plots can be found in the Appendix C.
- 2. All the measurements were found to be compliant.

Page 14 of 141



Report Number:	R20220615-20-E5	Rev	0
Prepared for:	Garmin International, Inc.		

### 4.3 POWER SPECTRAL DENSITY

**Test Method**: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

### Limits of power measurements:

#### For FCC Part 15.247 Device:

The maximum PSD allowed is 8 dBm.

### Test procedures:

Details can be found in section 3.4 of this report.

### **Deviations from test standard:**

No deviation.

### Test setup:

Details can be found in section 3.4 of this report.

### **EUT operating conditions:**

Details can be found in section 2.1 of this report.

#### Test results:

### **Pass**

### Comments:

- 1. All the Power Spectral Density (PSD) plots can be found in the Appendix C.
- 2. All the measurements were found to be compliant.
- 3. The measurements are reported on the graph.

Page 15 of 141



 Report Number:
 R20220615-20-E5
 Rev
 0

Prepared for: | Garmin International, Inc.

#### 4.4 CONDUCTED SPURIOUS EMISSIONS

**Test Method**: ANSI C63.10-2013, Section 7.8.8

### Limits of spurious emissions:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

### Test procedures:

The highest emissions level was measured and recorded. All spurious measurements were evaluated to 20dB below the fundamental. More details can be found in section 3.4 of this report.

### **Deviations from test standard:**

No deviation.

#### Test setup:

Test setup details can be found in section 3.4 of this report.

#### **EUT operating conditions:**

Details can be found in section 2.1 of this report.

### Test results:

Page 16 of 141



Prepared for: | Garmin International, Inc.

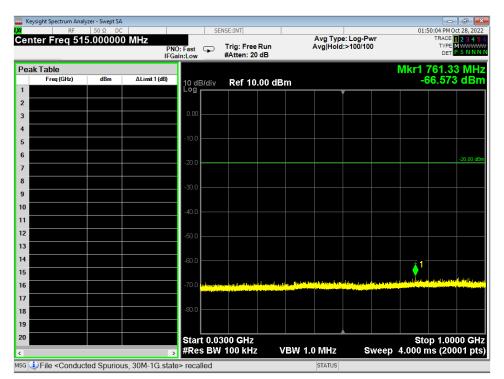


Figure 3 - Conducted Emissions Plot, Wifi B 1MB, 30M - 1G

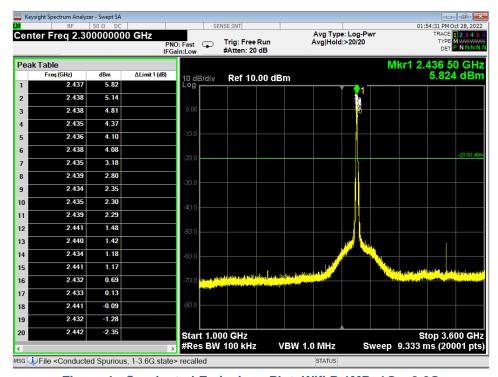


Figure 4 - Conducted Emissions Plot, Wifi B 1MB, 1G - 3.6G

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 17 of 141



Prepared for: | Garmin International, Inc.

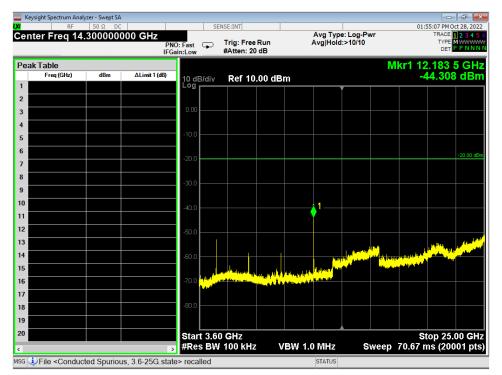


Figure 5 - Conducted Emissions Plot, Wifi B 1MB, 3.6G - 25G

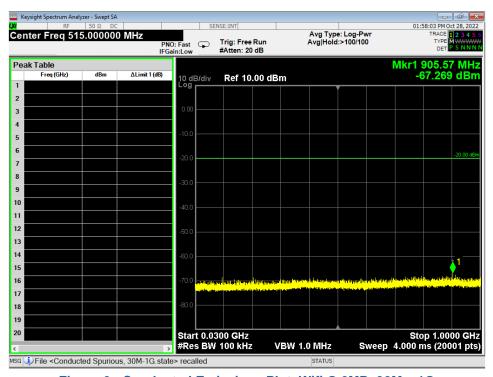


Figure 6 - Conducted Emissions Plot, Wifi G 6MB, 30M - 1G

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 18 of 141



Prepared for: | Garmin International, Inc.

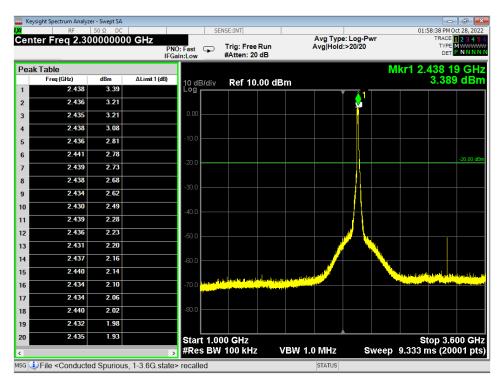


Figure 7 - Conducted Emissions Plot, Wifi G 6MB, 1G - 3.6G

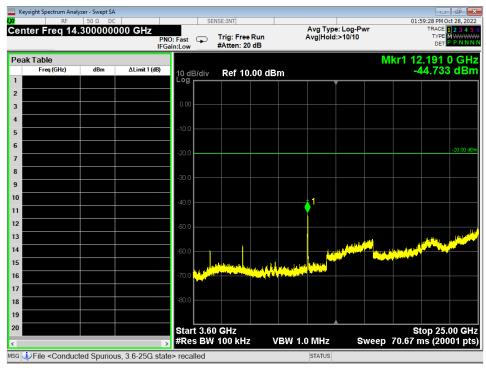


Figure 8 - Conducted Emissions Plot, Wifi G 6MB, 3.6G - 25G

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 19 of 141



Prepared for: | Garmin International, Inc.

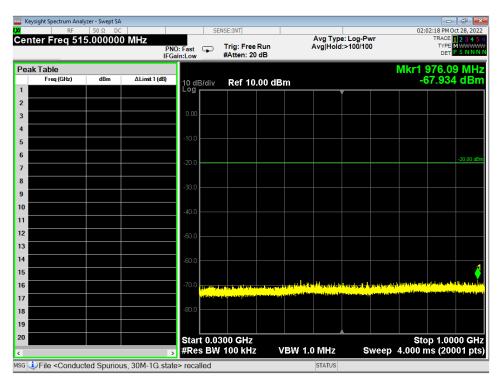


Figure 9 - Conducted Emissions Plot, Wifi N MCS0, 30M - 1G

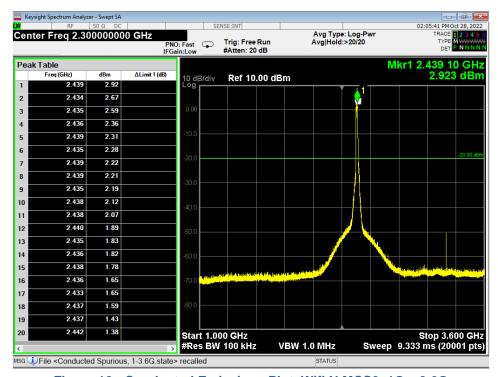


Figure 10 - Conducted Emissions Plot, Wifi N MCS0, 1G - 3.6G

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 20 of 141



Prepared for: | Garmin International, Inc.

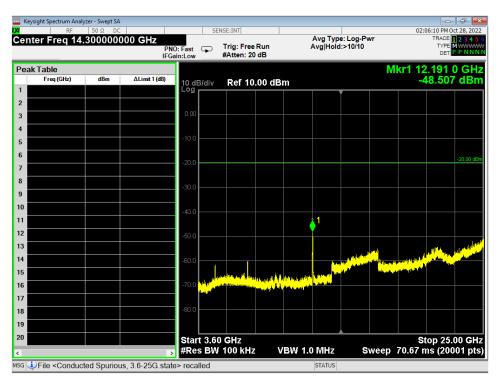


Figure 11 - Conducted Emissions Plot, Wifi N MCS0, 3.6G - 25G

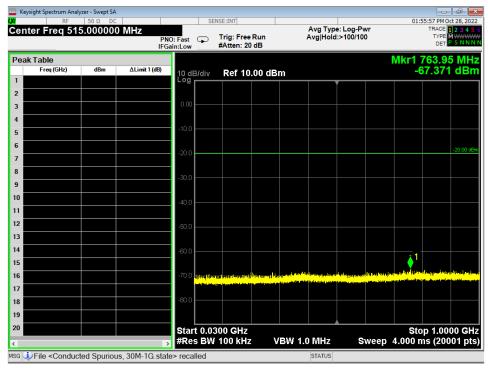


Figure 12 - Conducted Emissions Plot, Wifi B 11MB, 30M - 1G

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 21 of 141



Prepared for: | Garmin International, Inc.

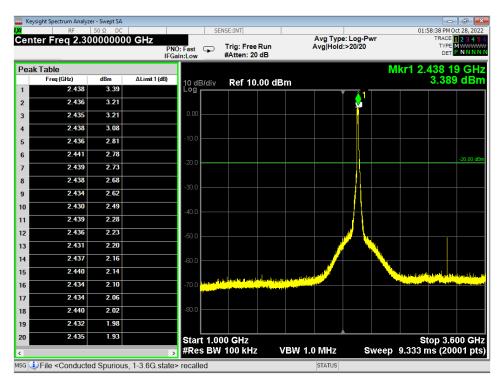


Figure 13 - Conducted Emissions Plot, Wifi B 11MB, 1G - 3.6G

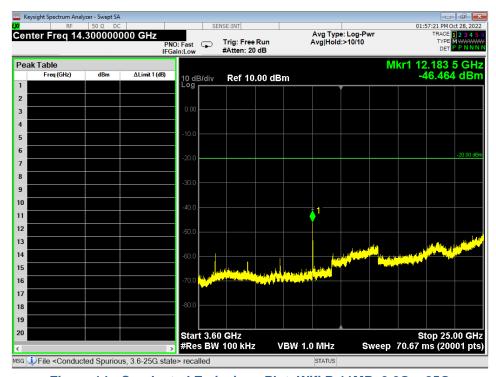


Figure 14 - Conducted Emissions Plot, Wifi B 11MB, 3.6G - 25G

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 22 of 141



Prepared for: | Garmin International, Inc.

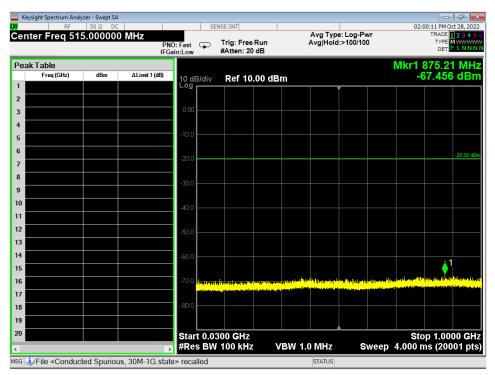


Figure 15 - Conducted Emissions Plot, Wifi G 54MB, 30M - 1G

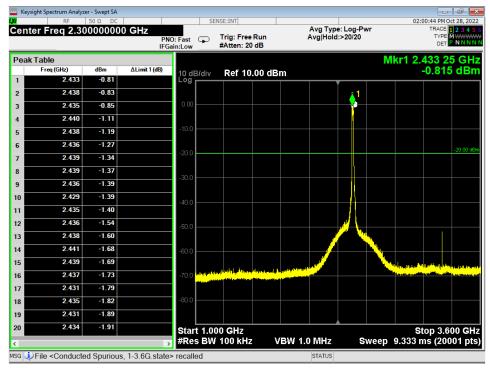


Figure 16 - Conducted Emissions Plot, Wifi G 54MB, 1G - 3.6G

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 23 of 141



Prepared for: | Garmin International, Inc.

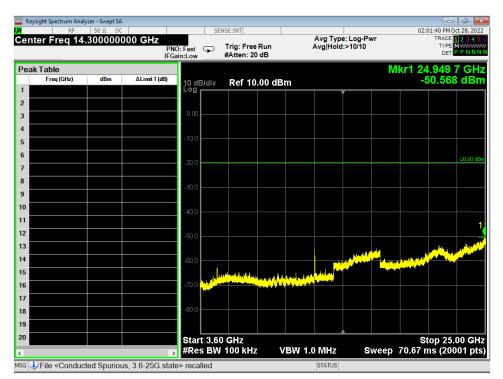


Figure 17 - Conducted Emissions Plot, Wifi G 54MB, 3.6G - 25G

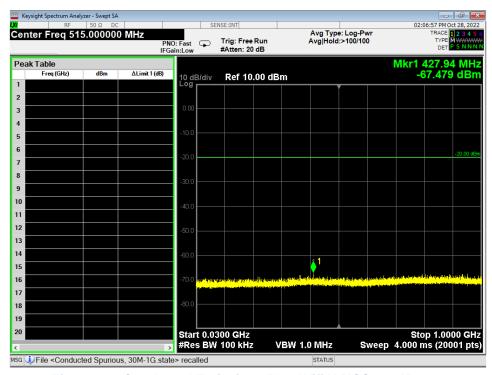


Figure 18 - Conducted Emissions Plot, Wifi N MCS7, 30M - 1G

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 24 of 141



Prepared for: | Garmin International, Inc.

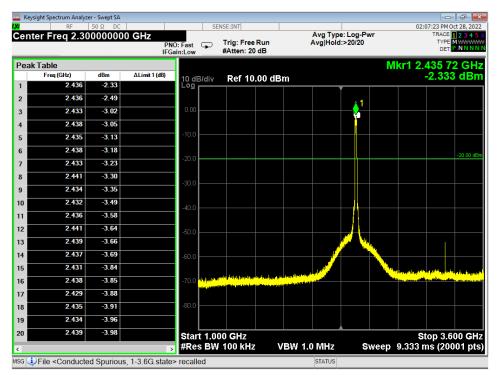


Figure 19 - Conducted Emissions Plot, Wifi N MCS7, 1G - 3.6G



Figure 20 - Conducted Emissions Plot, Wifi N MCS7, 3.6G - 25G

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 25 of 141



Report Number:	R20220615-20-E5	Rev	0

Prepared for: Garmin International, Inc.

### 4.5 CONDUCTED AC MAINS EMISSIONS

Test Method: ANSI C63.10-2013, Section(s) 6.2

#### Limits for conducted emissions measurements:

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)			
(1411 12)	Quasi-peak	Average		
0.15-0.5	66 to 56	56 to 46		
0.5-5	56	46		
5-30	60	50		

#### Notes:

- 1. The lower limit shall apply at the transition frequencies.
- 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz
- 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### **Test Procedures:**

- a. The EUT was placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits are not reported.
- d. Results were compared to the 15.207 limits.

#### Deviation from the test standard:

No deviation

### **EUT operating conditions:**

Details can be found in section 2.1 of this report.

.

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 26 of 141



Prepared for: | Garmin International, Inc.

### **Test Results:**

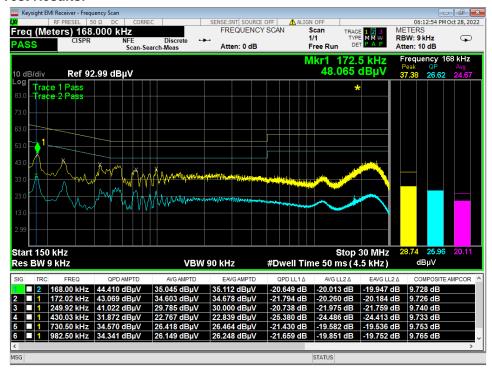


Figure 21 - Conducted Emissions Plot, Line, TX

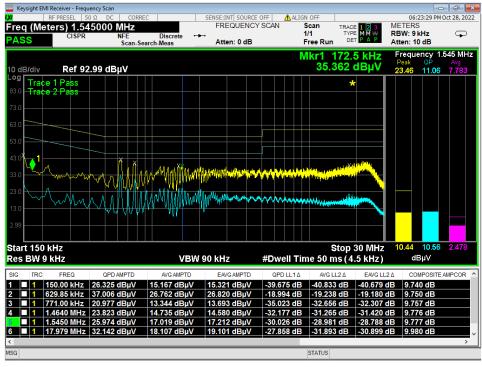


Figure 22 - Conducted Emissions Plot, Neutral, TX

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 27 of 141



Prepared for: | Garmin International, Inc.

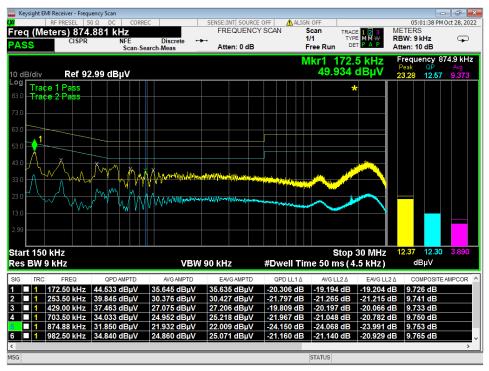


Figure 23 - Conducted Emissions Plot, Line, IDLE

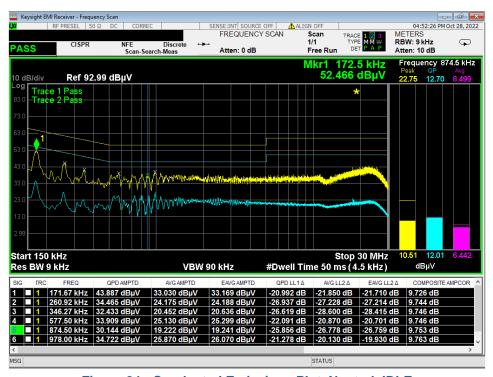


Figure 24 - Conducted Emissions Plot, Neutral, IDLE

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 28 of 141



0

### 4.6 DUTY CYCLE

### **Test Method:**

All Modulations/Transmitters in this report had a duty cycle of >98%



 Report Number:
 R20220615-20-E5
 Rev
 0

Prepared for:

Garmin International, Inc.

### 4.7 RADIATED EMISSIONS

**Test Method**: ANSI C63.10-2013, Section 6.5, 6.6

### Limits for radiated emissions measurements:

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH (µV/m)	MEASUREMENT DISTANCE (m)		
0.009-0.490	2400/F(kHz)	300		
0.490-1.705	24000/F(kHz)	30		
1.705-30.0	30	3		
30-88	100	3		
88-216	150	3		
216-960	200	3		
Above 960	500	3		

#### NOTE:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level (dBuV/m) = 20 \* log \* Emission level ( $\mu$ V/m).
- 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.
- 4. The EUT was tested for spurious emissions while running off of battery power and external USB power. The worse-case emissions were produced while running off of USB power, so results from this mode are presented.

Page 30 of 141



 Report Number:
 R20220615-20-E5
 Rev
 0

 Prepared for:
 Garmin International, Inc.

Test procedures:

a. The EUT was placed on the top of a rotating table above the ground plane in a 10-meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1Ghz and 1.5m for measurements from 1GHz and higher.

- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise, the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.



Prepared for: | Garmin International, Inc.

### Test setup:

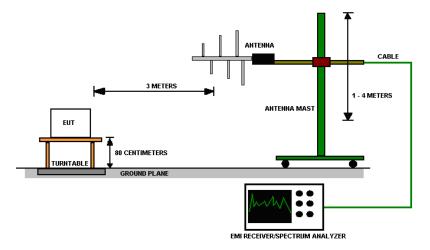


Figure 25 - Radiated Emissions Test Setup

### NOTE:

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
- 2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

### **Deviations from test standard:**

No deviation.

### **EUT operating conditions**

Details can be found in section 2.1 of this report.

Page 32 of 141



 Report Number:
 R20220615-20-E5
 Rev
 0

Prepared for: Garmin International, Inc.

### Test results:

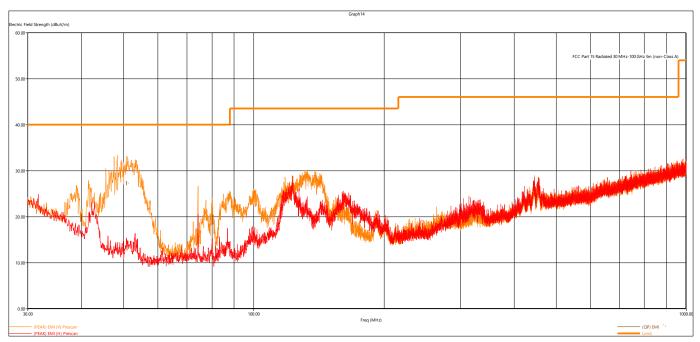


Figure 26 - Radiated Emissions Plot, Receive

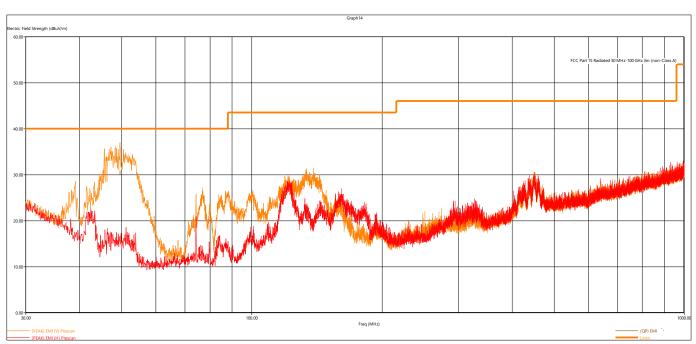


Figure 27 - Radiated Emissions Plot, 802.11b, Low Data Rate

Page 33 of 141



Report Number: R2

R20220615-20-E5

Rev

0

Prepared for:

Garmin International, Inc.

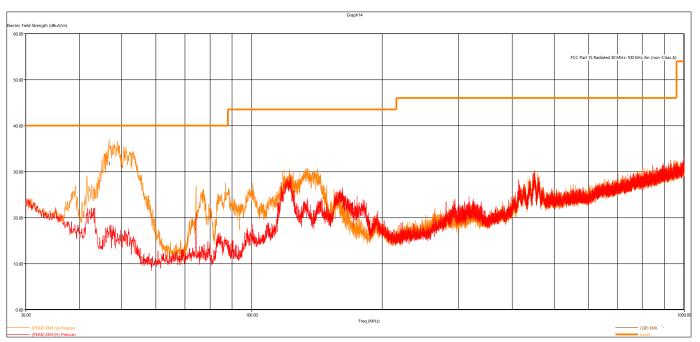


Figure 28 - Radiated Emissions Plot, 802.11g, Low Data Rate

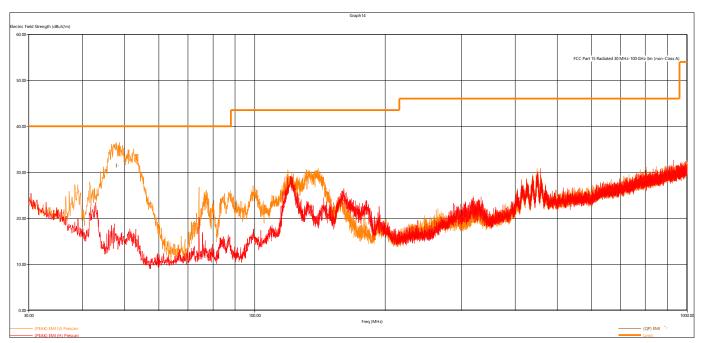


Figure 29 - Radiated Emissions Plot, 802.11n, Low Data Rate

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 34 of 141



Report Number: F

R20220615-20-E5

Rev

0

Prepared for:

Garmin International, Inc.

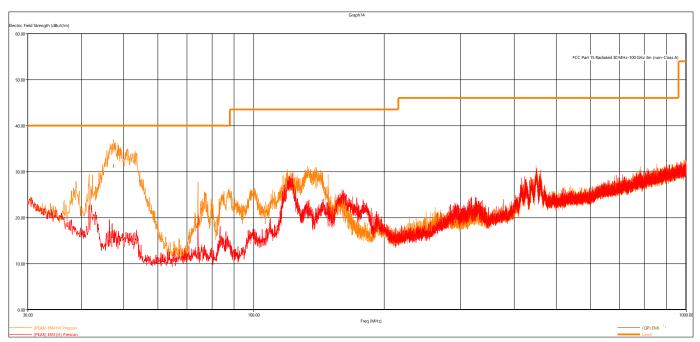


Figure 30 - Radiated Emissions Plot, 802.11b, High Data Rate

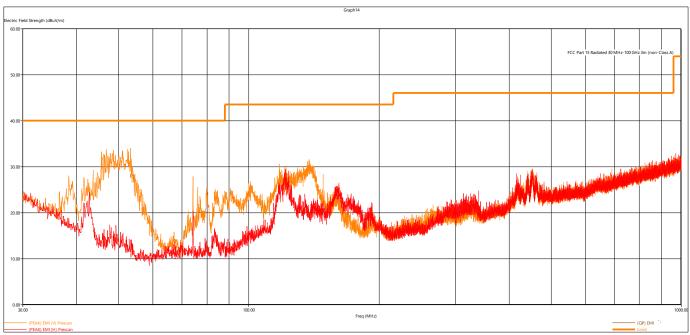


Figure 31 - Radiated Emissions Plot, 802.11g, High Data Rate

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 35 of 141



 Report Number:
 R20220615-20-E5
 Rev
 0

Prepared for: | Garmin International, Inc.

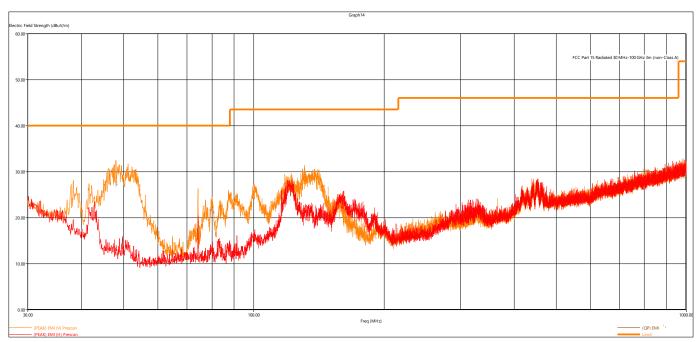


Figure 32 - Radiated Emissions Plot, 802.11n, High Data Rate

#### **REMARKS**:

- 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Limit value Emission level

Quasi-Peak Measurements, 802.11x								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dBµV/m	dBµV/m	dB	cm.	deg.			
49.538160	30.35	40.00	9.65	106.00	22.00	V	Low	WIFI B 1MB
47.420640	31.15	40.00	8.85	111.00	298.00	V	Low	WIFI B 11MB
46.832640	31.71	40.00	8.29	112.00	321.00	V	Low	WIFI G 6MHz
53.470560	27.97	40.00	12.03	108.00	24.00	V	Low	WIFI G 54MHz
47.860080	31.44	40.00	8.56	106.00	314.00	V	Low	WIFI N MCS0
47.778960	27.20	40.00	12.80	116.00	316.00	V	Low	WIFI N MCS7
50.845200	27.22	40.00	12.78	116.00	39.00	V		RX

All other measurements found to be at least 6dB below the limit line

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 36 of 141



Prepared for: Garmin International, Inc.

Peak Measurements, 802.11x								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dBµV/m	dBµV/m	dB	cm.	deg.			
2411.116000	98.80	NA	NA	170	189	Η	Low	WIFI B 1MB
2436.094000	98.98	NA	NA	125	32	Н	Mid	WIFI B 1MB
2461.082000	99.48	NA	NA	211	183	Н	High	WIFI B 1MB
2412.346000	102.40	NA	NA	169	188	Н	Low	WIFI B 11MB
2436.234000	103.61	NA	NA	134	186	Н	Mid	WIFI B 11MB
2461.218000	103.96	NA	NA	209	185	Н	High	WIFI B 11MB
2410.898000	99.74	NA	NA	146	25	Η	Low	WIFI G 6MHz
2435.156000	103.46	NA	NA	158	188	Н	Mid	WIFI G 6MHz
2459.818000	101.41	NA	NA	278	177	Η	High	WIFI G 6MHz
2412.520000	98.85	NA	NA	203	185	Η	Low	WIFI G 54MHz
2435.178000	98.97	NA	NA	163	29	Н	Mid	WIFI G 54MHz
2461.174000	97.94	NA	NA	112	181	Н	High	WIFI G 54MHz
2409.936000	101.28	NA	NA	396	297	Η	Low	WIFI N MCS0
2434.892000	102.73	NA	NA	206	32	Н	Mid	WIFI N MCS0
2461.230000	100.04	NA	NA	192	20	Η	High	WIFI N MCS0
2410.754000	98.43	NA	NA	397	299	Η	Low	WIFI N MCS7
2435.420000	96.46	NA	NA	161	26	Н	Mid	WIFI N MCS7
2461.472000	96.96	NA	NA	237	18	Η	High	WIFI N MCS7

The EUT was maximized in all 3 orthogonal axes. The worst-case is shown in the plot and table above. All other emissions found to be at least 6dB below the limit line. System Noise floor was at least 6 dB below the limit line throughout the test range.



Prepared for: | Garmin International, Inc.

Average Measurements, 802.11x								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dBµV/m	dBµV/m	dB	cm.	deg.			
2411.116000	95.93	NA	NA	170	189	Η	Low	WIFI B 1MB
2436.094000	96.02	NA	NA	125	32	Η	Mid	WIFI B 1MB
2461.082000	96.47	NA	NA	211	183	Н	High	WIFI B 1MB
2412.346000	94.91	NA	NA	169	188	Η	Low	WIFI B 11MB
2436.234000	95.49	NA	NA	134	186	Н	Mid	WIFI B 11MB
2461.218000	95.83	NA	NA	209	185	Н	High	WIFI B 11MB
2410.898000	90.60	NA	NA	146	25	Η	Low	WIFI G 6MHz
2435.156000	94.23	NA	NA	158	188	Η	Mid	WIFI G 6MHz
2459.818000	91.36	NA	NA	278	177	Н	High	WIFI G 6MHz
2412.520000	87.77	NA	NA	203	185	Η	Low	WIFI G 54MHz
2435.178000	88.19	NA	NA	163	29	Н	Mid	WIFI G 54MHz
2461.174000	88.13	NA	NA	112	181	Н	High	WIFI G 54MHz
2409.936000	91.44	NA	NA	396	297	Η	Low	WIFI N MCS0
2434.892000	93.01	NA	NA	206	32	Н	Mid	WIFI N MCS0
2461.230000	90.78	NA	NA	192	20	Н	High	WIFI N MCS0
2410.754000	87.65	NA	NA	397	299	Н	Low	WIFI N MCS7
2435.420000	85.80	NA	NA	161	26	Н	Mid	WIFI N MCS7
2461.472000	85.94	NA	NA	237	18	Н	High	WIFI N MCS7

The EUT was maximized in all 3 orthogonal axes. The worst-case is shown in the plot and table above. All other emissions found to be at least 6dB below the limit line. System Noise floor was at least 6 dB below the limit line throughout the test range.



Prepared for: Garmin International, Inc.

#### 4.8 BAND EDGES

**Test Method**: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

### Limits of band-edge measurements:

### For FCC Part 15.247 Device:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.205(c))

### Test procedures:

The highest emissions level beyond the band-edge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209. More details can be found in section 3.4 of this report.

### **Deviations from test standard:**

No deviation.

### Test setup:

Test setup details can be found in section 3.4 of this report.

### **EUT operating conditions:**

Details can be found in section 2.1 of this report.

#### Test results:

### **Pass**

#### Comments:

- 1. All the band edge plots can be found in the Appendix C.
- 2. If the device falls under FCC Part 15.247 (Details can be found in summary of test results), compliance is shown in the unrestricted band edges by showing minimum delta of 20 dB between peak and the band edge.
- 3. The restricted band edge compliance is shown by comparing to the general limit defined in Part 15.209. The limit shown in the graph accounts for the antenna gain of the device.

Page 39 of 141



Prepared for: | Garmin International, Inc.

### 4.9 ANTENNA GAIN

### Test procedures:

Device's conducted power was measured then then same measurement was repeated on a radiated sample at 3m test distance and converted to E.I.R.P.

## Test setup:

Details can be found in section 2.1 of this report.

# **EUT operating conditions:**

Details can be found in section 2.1 and 2.2 of this report.

## Test results:

#### Antenna Gain:

Radiated Average power – Conducted Average Power = Antenna gain 12.24 dBm – 15.53 dBm = **-3.29 dBi** 

#### Comments:

1. Since antenna gain was negative, conducted values were compared to the limit as if it has 0dBm gain for worst case

Lincoln, NE 68521 Page 40 of 141



Prepared for: | Garmin International, Inc.

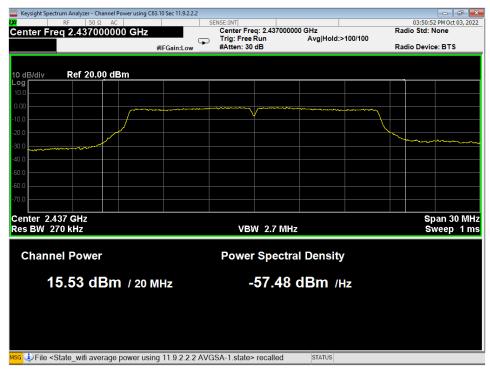


Figure 33 - Conducted Average Power Measurement, 802.11g 6MB

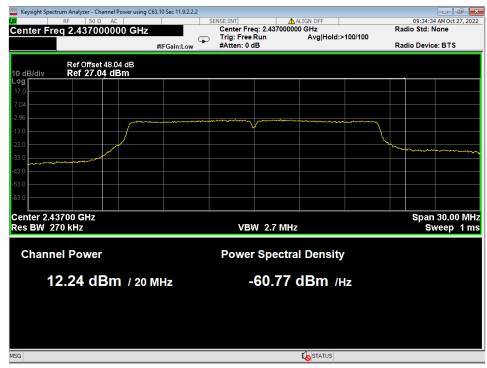


Figure 34 – Radiated Average Power Measurement, 802.11g 6MB
Reference offset includes EIRP conversion and corrections

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 41 of 141



Report Number:	R20220615-20-E5		0
		•	

Prepared for: | Garmin International, Inc.

## APPENDIX A: SAMPLE CALCULATION

# **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB $\mu$ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB $\mu$ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 dB\mu V/m$$

The 48.1 dB<sub>μ</sub>V/m value can be mathematically converted to its corresponding level in μV/m.

Level in  $\mu$ V/m = Common Antilogarithm [(48.1 dB $\mu$ V/m)/20]= 254.1  $\mu$ V/m

AV is calculated by the taking the  $20*log(T_{on}/100)$  where  $T_{on}$  is the maximum transmission time in any 100ms window.

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 42 of 141



Report Number:	R20220615-20-E5	Rev	0
Prenared for:	Garmin International Inc		

## **EIRP Calculations**

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

EIRP (Watts) = [Field Strength (V/m) x antenna distance (m)] $^2$  / 30

Power (watts) =  $10^{Power} (dBm)/10 / 1000$ 

Voltage  $(dB\mu V)$  = Power (dBm) + 107 (for 50 $\Omega$  measurement systems)

Field Strength  $(V/m) = 10^{field Strength} (dB\mu V/m) / 20] / 10^6$ 

Gain = 1 (numeric gain for isotropic radiator)

Conversion from 3m field strength to EIRP (d=3):

 $EIRP = [FS(V/m) \times d^2]/30 = FS[0.3]$  for d = 3

 $EIRP(dBm) = FS(dB\mu V/m) - 10(log 10^9) + 10log[0.3] = FS(dB\mu V/m) - 95.23$ 

10log(10^9) is the conversion from micro to milli

Lincoln, NE 68521 Page 43 of 141



Report Number:	R20220615-20-E5	Rev	0
Prepared for:	Garmin International, Inc.		

# APPENDIX B - MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:

Test	Frequency Range	Uncertainty Value (dB)		
Radiated Emissions, 3m	30MHz - 1GHz	±4.31		
Radiated Emissions, 3m	1GHz - 18GHz	±5.08		
Emissions limits, conducted	150kHz – 30MHz	±3.03		

Expanded uncertainty values are calculated to a confidence level of 95%.

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 44 of 141



Report Number: | F

R20220615-20-E5

-F5


Rev

0

Prepared for:

Garmin International, Inc.

## APPENDIX C - GRAPHS AND TABLES

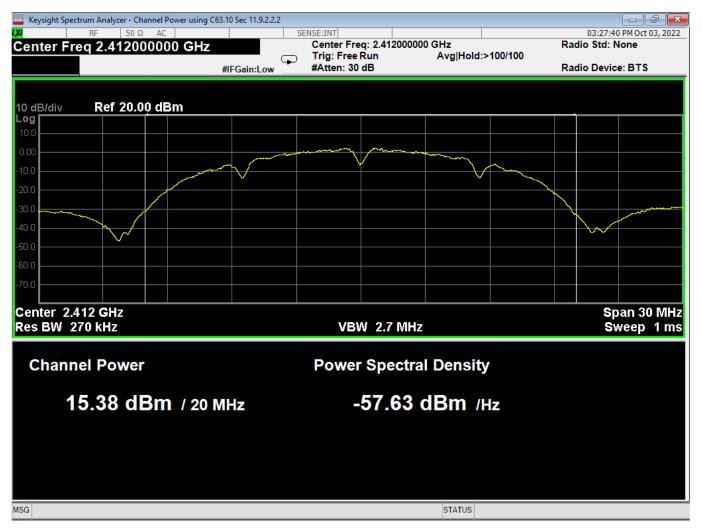

01 Average Power, Low, Wifi B, Low Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 45 of 141



Prepared for:

Garmin International, Inc.

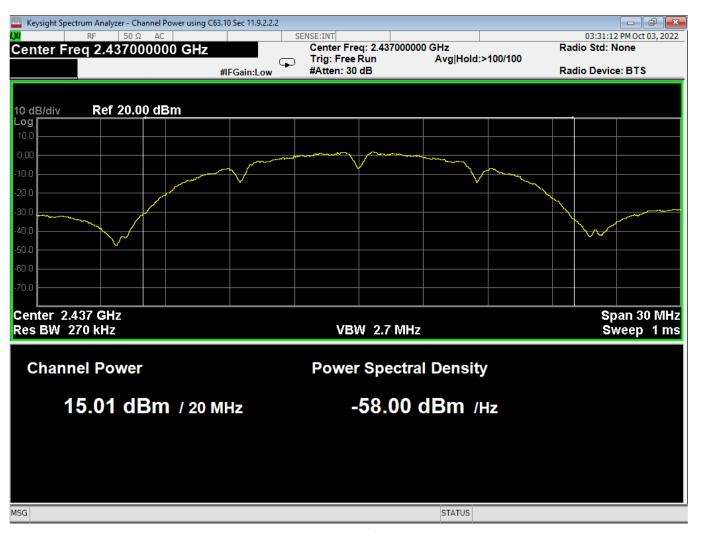

02 Average Power, Mid, Wifi B, Low Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 46 of 141



Prepared for:

Garmin International, Inc.

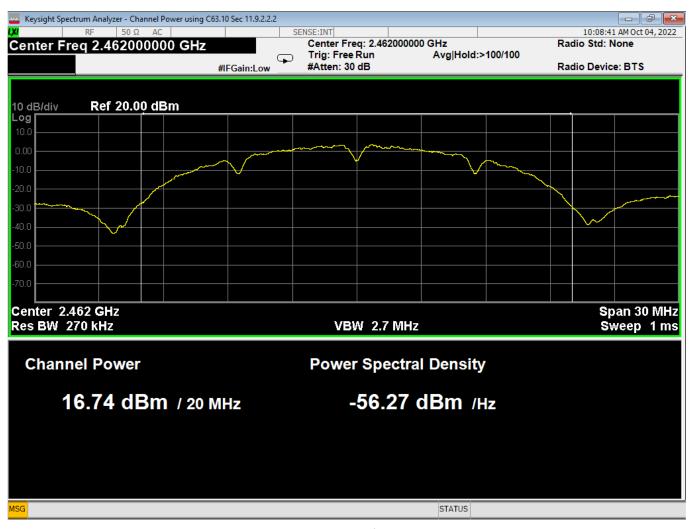

03 Average Power, High, Wifi B, Low Data Rate

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521


Page 47 of 141



R20220615-20-E5 0 Report Number: Rev

Prepared for:

Garmin International, Inc.

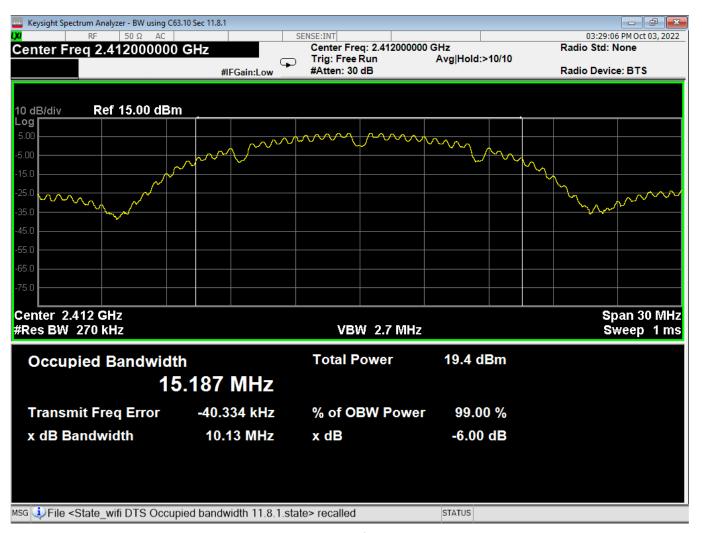


04 Bandwidth, Low, Wifi B, Low Data Rate

Page 48 of 141



Prepared for:

Garmin International, Inc.

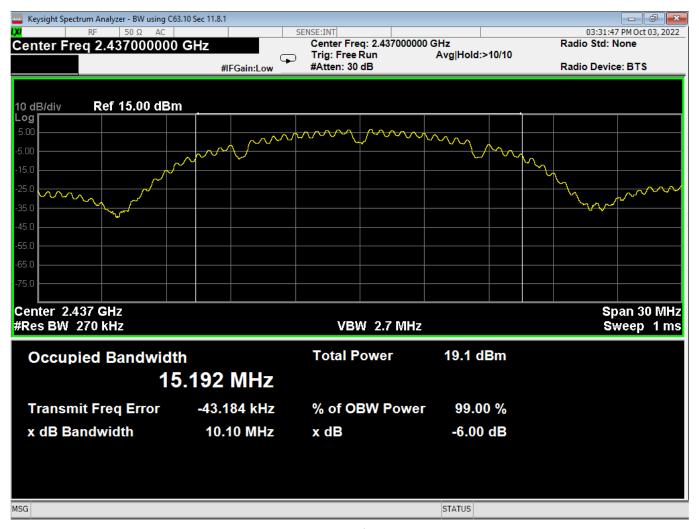

05 Bandwidth, Mid, Wifi B, Low Data Rate

Lincoln, NE 68521 Page 49 of 141



Prepared for:

Garmin International, Inc.



06 Bandwidth, High, Wifi B, Low Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 50 of 141



Prepared for:

Garmin International, Inc.

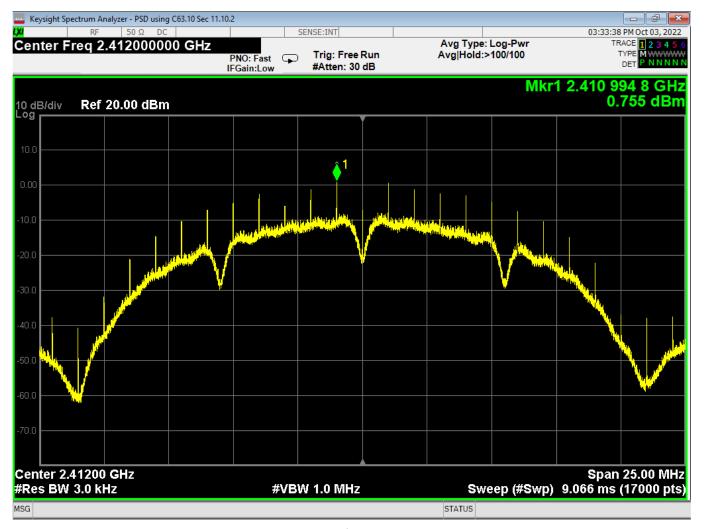

07 PSD, Low, Wifi B, Low Data Rate

Page 51 of 141



Report Number:

R20220615-20-E5

Rev

0

Prepared for:

Garmin International, Inc.



08 PSD, Mid, Wifi B, Low Data Rate

Page 52 of 141



Prepared for:

Garmin International, Inc.




09 PSD, High, Wifi B, Low Data Rate

Page 53 of 141



Prepared for: | Garmin International, Inc.

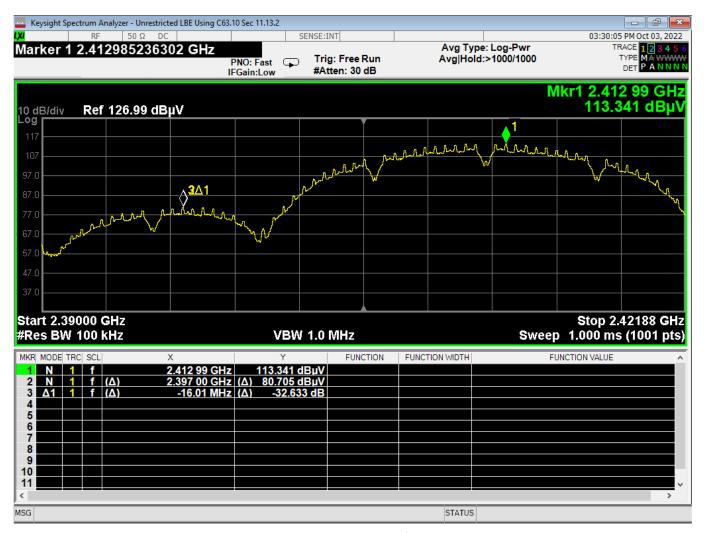

10 Lower Bandedge, Unrestricted, Wifi B, Low Data Rate

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 54 of 141



Prepared for: Ga

Garmin International, Inc.




11 Higher Bandedge, Unrestricted, Wifi B, Low Data Rate

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 55 of 141



Prepared for: Garmin International, Inc.

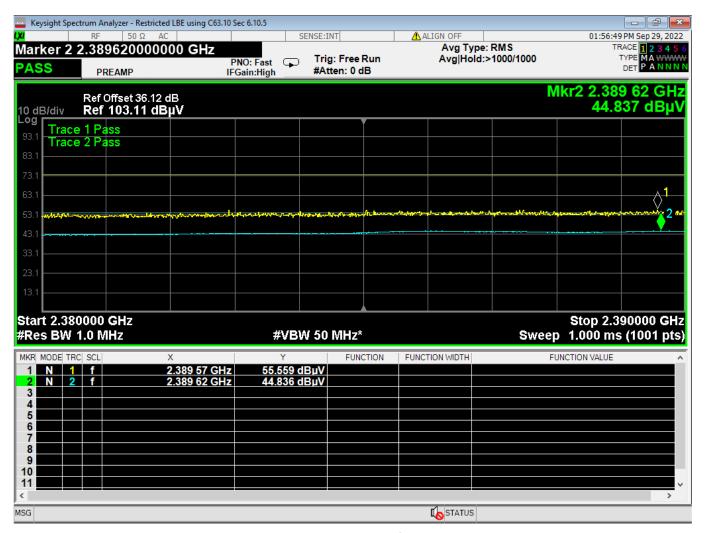

12 Lower Bandedge, Restricted, Wifi B, Low Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 56 of 141



Prepared for:

Garmin International, Inc.

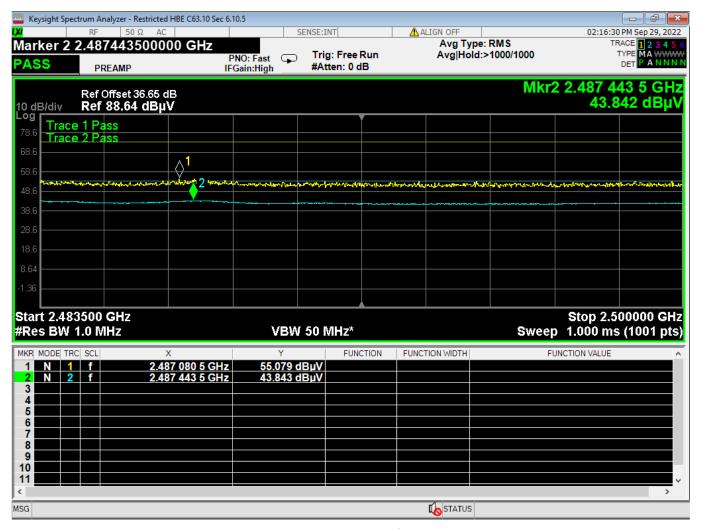


13 Higher Bandedge, Restricted, Wifi B, Low Data Rate

Page 57 of 141



Prepared for: Ga

Garmin International, Inc.

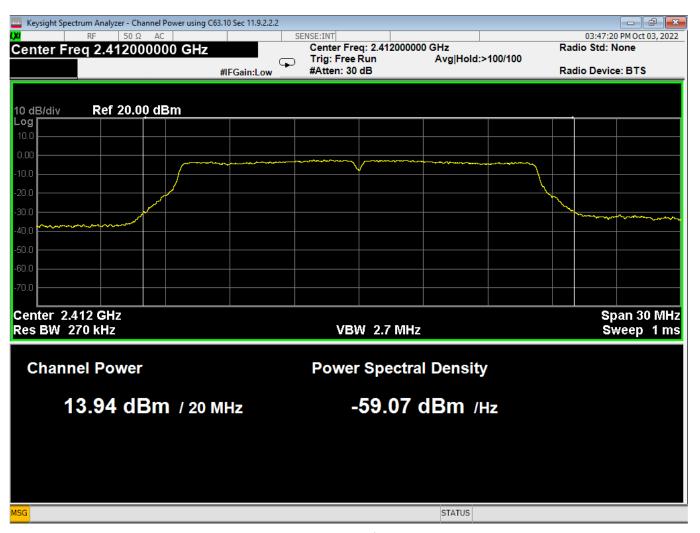


14 Average Power, Low, Wifi G, Low Data Rate

Page 58 of 141



Prepared for: | Ga

Garmin International, Inc.

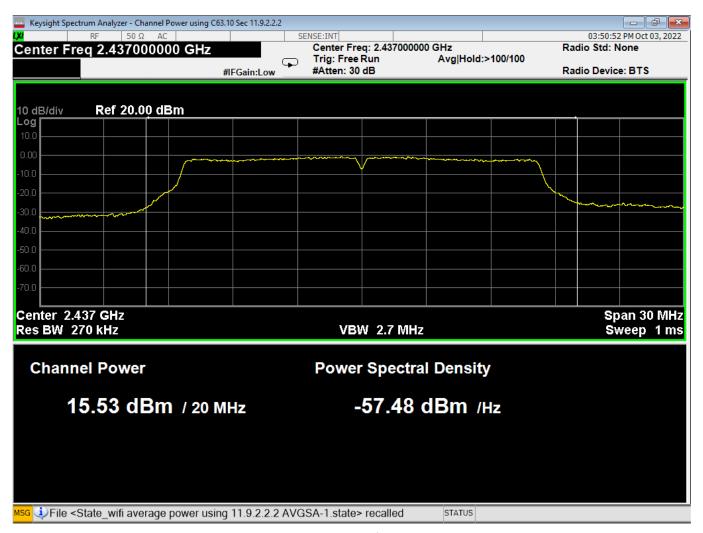


15 Average Power, Mid, Wifi G, Low Data Rate

Page 59 of 141



Prepared for: | Garmii

Garmin International, Inc.

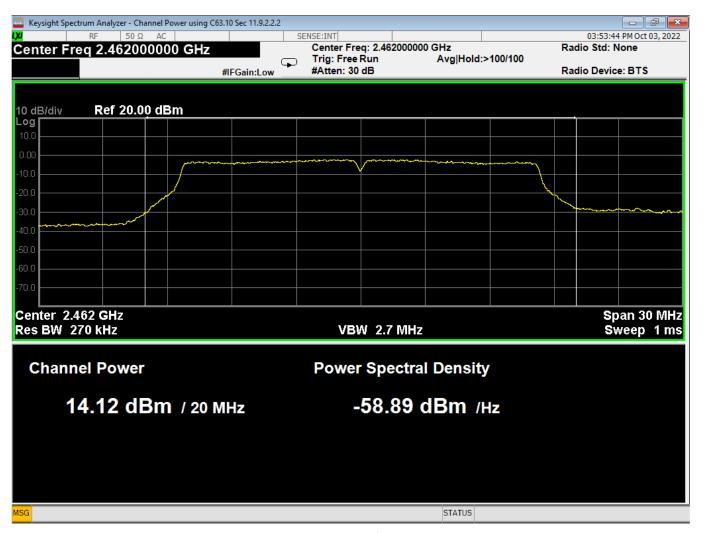

16 Average Power, High, Wifi G, Low Data Rate


Page 60 of 141



R20220615-20-E5 0 Report Number: Rev

Prepared for:

Garmin International, Inc.

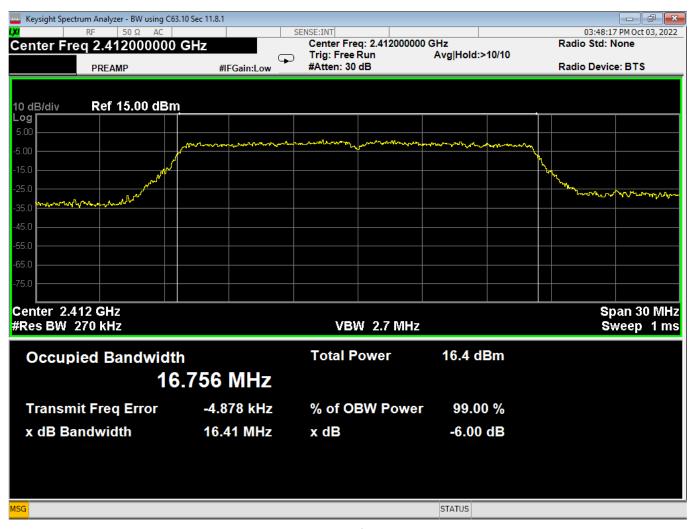

17 Bandwidth, Low, Wifi G, Low Data Rate

Page 61 of 141



Prepared for:

Garmin International, Inc.




18 Bandwidth, Mid, Wifi G, Low Data Rate

Page 62 of 141



Prepared for: | Garmin

Garmin International, Inc.

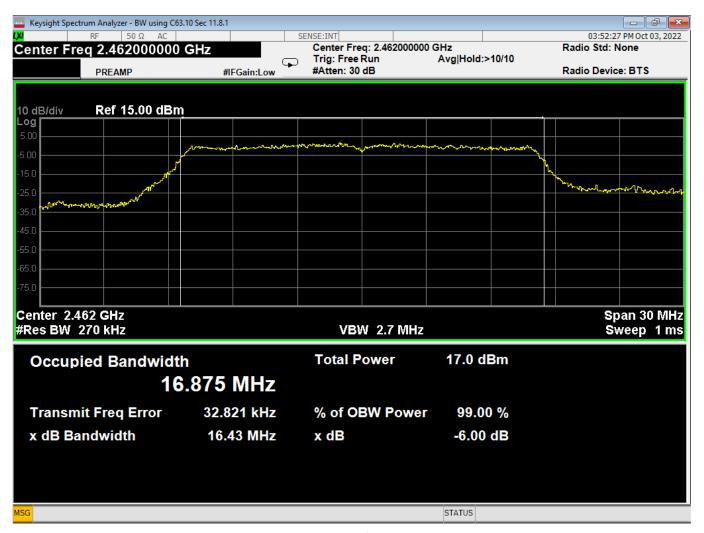

19 Bandwidth, High, Wifi G, Low Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 63 of 141



Prepared for: | Garm

Garmin International, Inc.

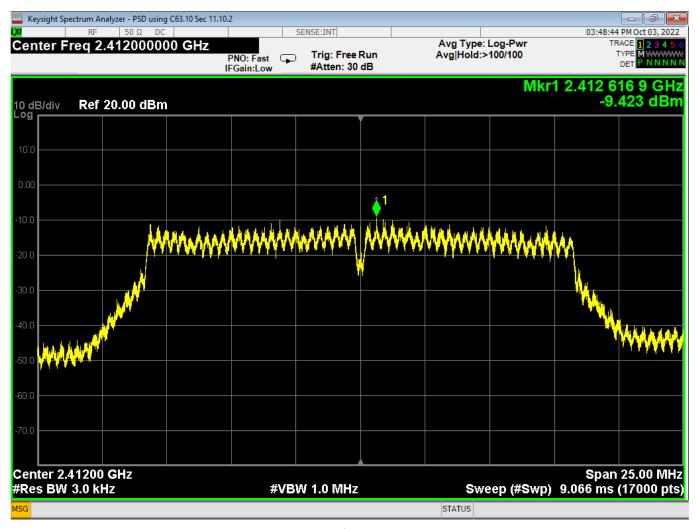


20 PSD, Low, Wifi G, Low Data Rate

Page 64 of 141



Prepared for: | Gai

Garmin International, Inc.

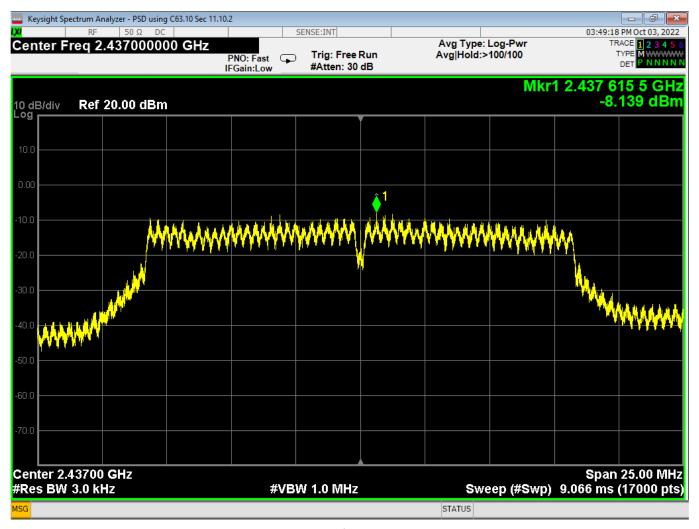


21 PSD, Mid, Wifi G, Low Data Rate

Page 65 of 141



Prepared for:

Garmin International, Inc.

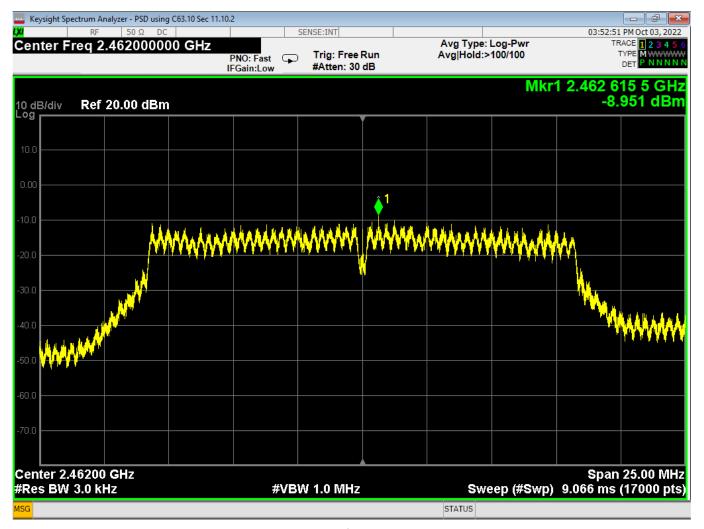


22 PSD, High, Wifi G, Low Data Rate

Page 66 of 141



Prepared for:

Garmin International, Inc.

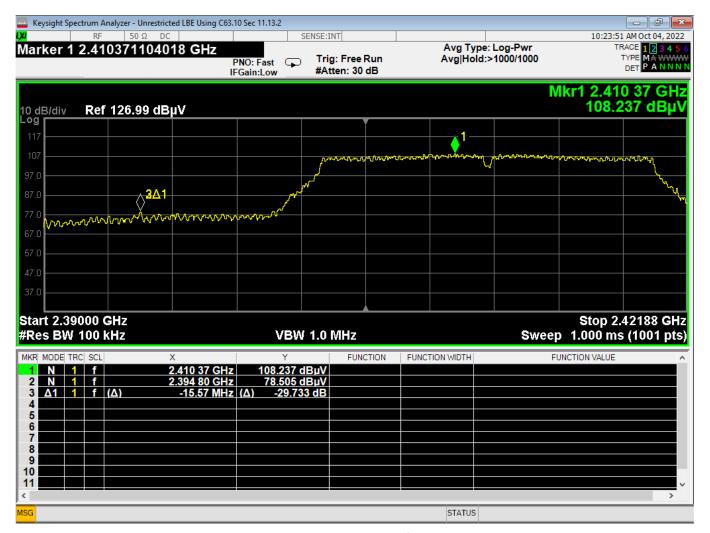

23 Lower Bandedge, Unrestricted, Wifi G, Low Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 67 of 141



Prepared for:

Garmin International, Inc.

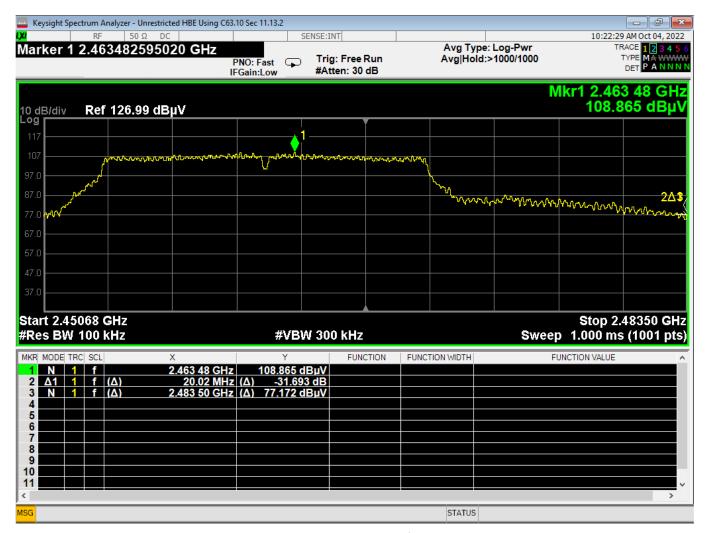


24 Higher Bandedge, Unrestricted, Wifi G, Low Data Rate

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 68 of 141



Prepared for: | Garmin International, Inc.

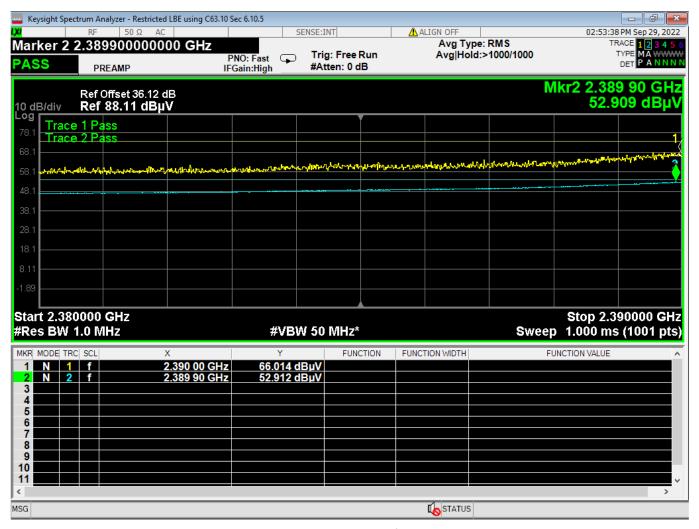

25 Lower Bandedge, Restricted, Wifi G, Low Data Rate

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 69 of 141



Prepared for:

Garmin International, Inc.

Keysight Spectrum Analyzer - Restricted HBE C63.10 Sec 6.10.5 SENSE:INT 03:14:59 PM Sep 29, 2022 ALIGN OFF Marker 2 2.483566000000 GHz Avg Type: RMS TRACE 1 2 3 4 5 ( Avg|Hold:>1000/1000 Trig: Free Run PNO: Fast IFGain:High DET PANNN **PASS** PREAMP #Atten: 0 dB Mkr2 2.483 549 5 GHz Ref Offset 36.65 dB Ref 88.64 dBµV 53.052 dBµ\ 10 dB/div Log Trace 1 Pass Trace 2 Pass Marchest from the months of the control of the cont Stop 2.500000 GHz Start 2.483500 GHz #Res BW 1.0 MHz VBW 50 MHz\* Sweep 1.000 ms (1001 pts) FUNCTION FUNCTION VALUE FUNCTION WIDTH MKR MODE TRC SCL 2.484 275 5 GHz 2.483 549 5 GHz 70.355 dBµV 53.050 dBµV 3 6 7 8 9 11 MSG STATUS

26 Higher Bandedge, Restricted, Wifi G, Low Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 70 of 141



Prepared for: | Garmin |

Garmin International, Inc.

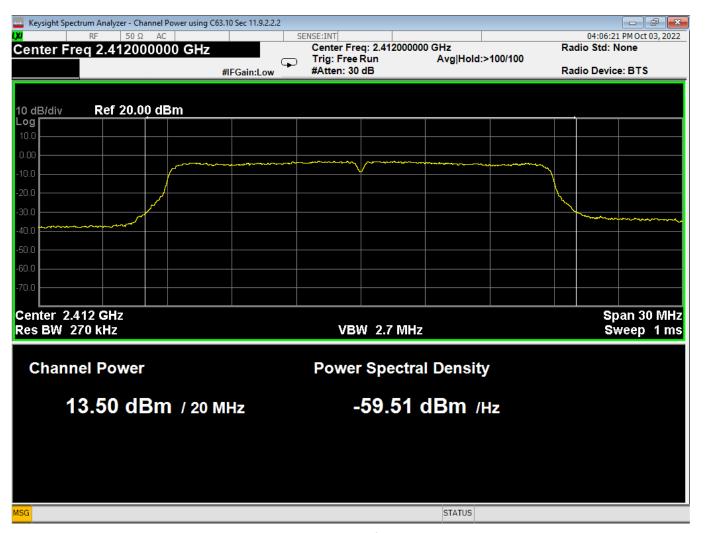


27 Average Power, Low, Wifi N, Low Data Rate

Page 71 of 141



Prepared for: | G

Garmin International, Inc.

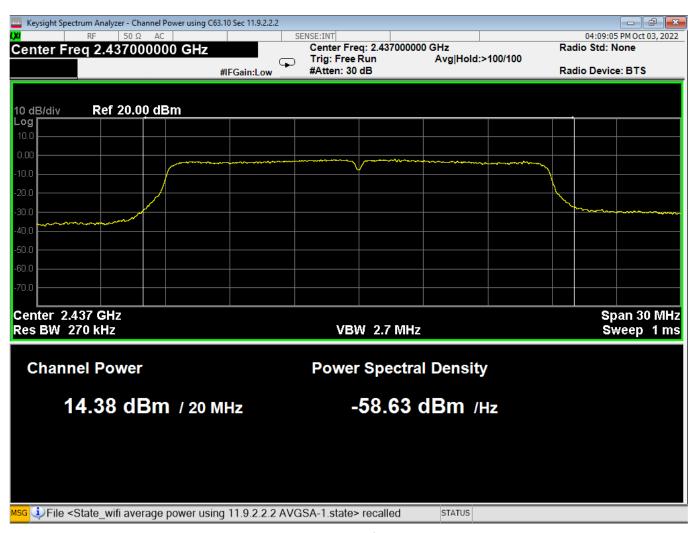


28 Average Power, Mid, Wifi N, Low Data Rate

Page 72 of 141



Prepared for:

Garmin International, Inc.

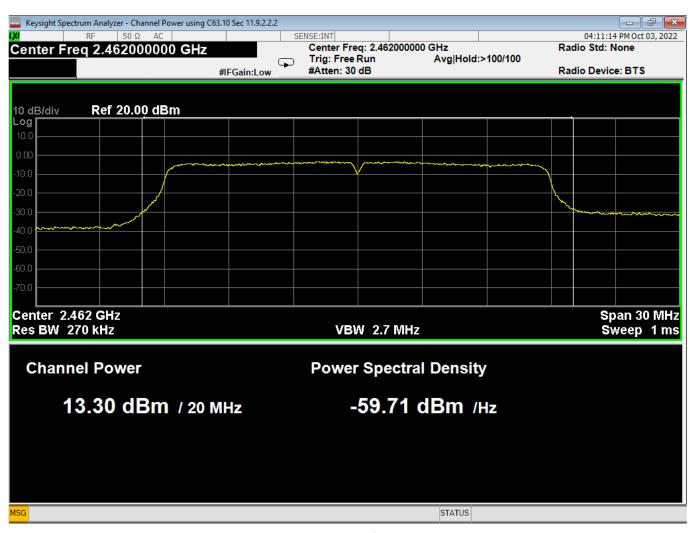

29 Average Power, High, Wifi N, Low Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 73 of 141



Prepared for:

Garmin International, Inc.

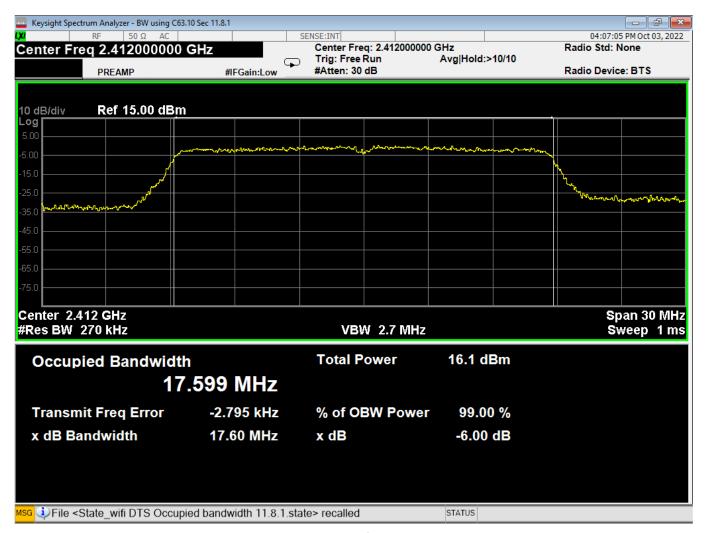

30 Bandwidth, Low, Wifi N, Low Data Rate

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 74 of 141



Prepared for:

Garmin International, Inc.



31 Bandwidth, Mid, Wifi N, Low Data Rate

Page 75 of 141



Prepared for:

Garmin International, Inc.



32 Bandwidth, High, Wifi N, Low Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 76 of 141



Prepared for: | Garm

Garmin International, Inc.

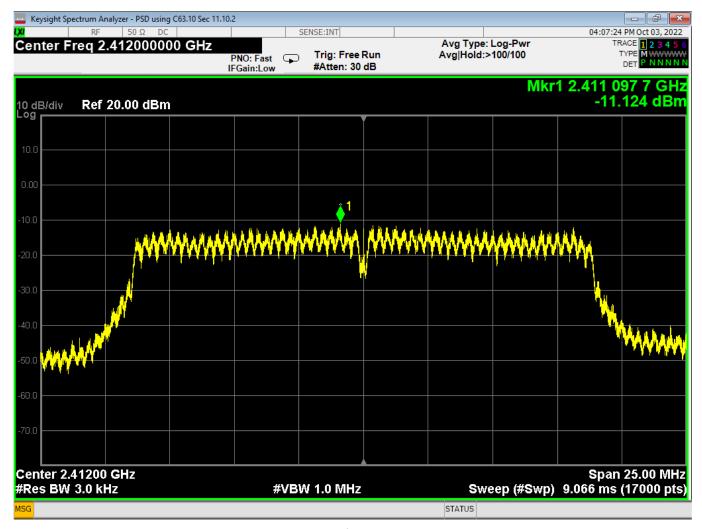


33 PSD, Low, Wifi N, Low Data Rate

Page 77 of 141



Prepared for: G

Garmin International, Inc.

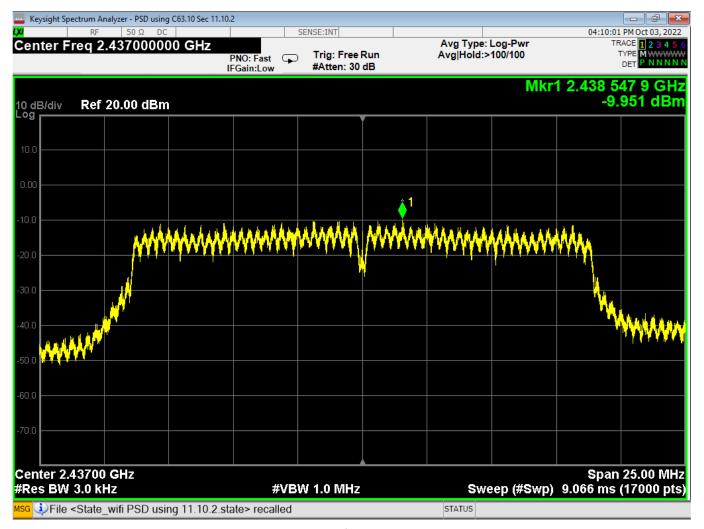


34 PSD, Mid, Wifi N, Low Data Rate

Page 78 of 141



Prepared for:

Garmin International, Inc.

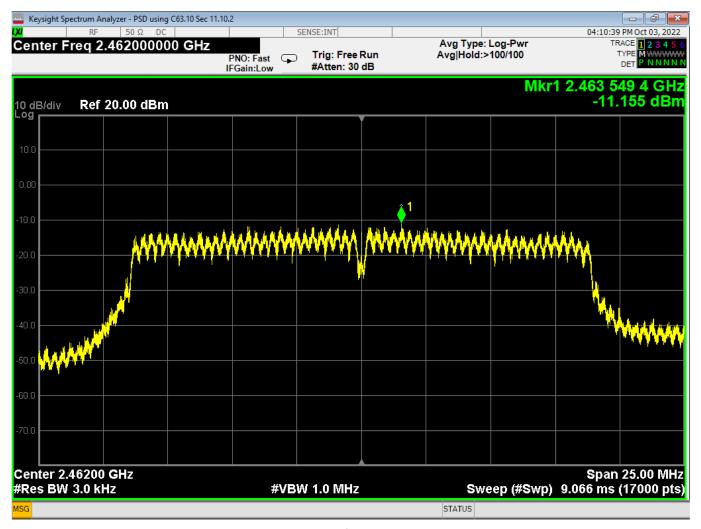


35 PSD, High, Wifi N, Low Data Rate

Page 79 of 141



Prepared for: | Ga

Garmin International, Inc.

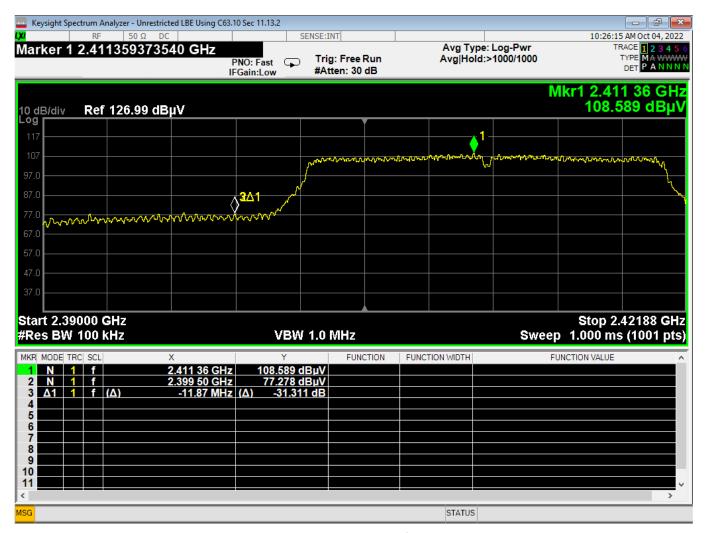

36 Lower Bandedge, Unrestricted, Wifi N, Low Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 80 of 141



Prepared for:

Garmin International, Inc.

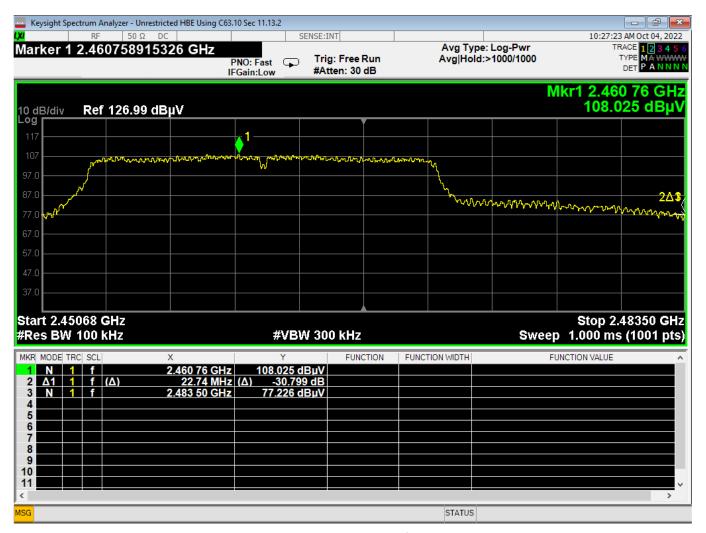


37 Higher Bandedge, Unrestricted, Wifi N, Low Data Rate

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 81 of 141



Prepared for: Garmin International, Inc.

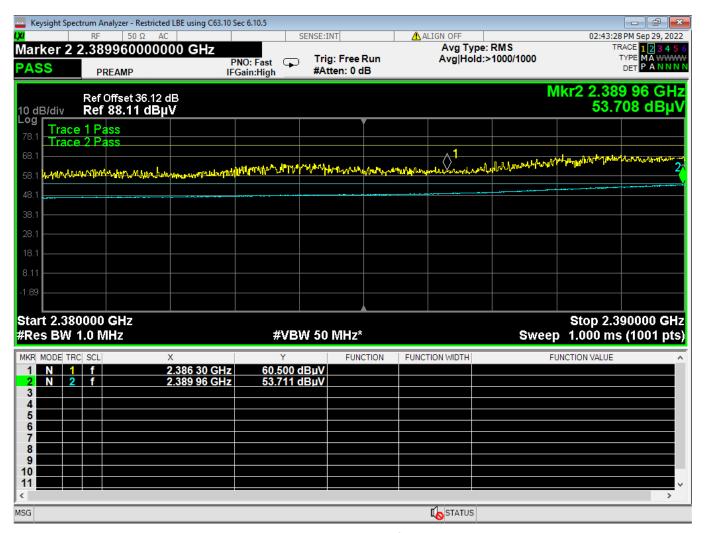

38 Lower Bandedge, Restricted, Wifi N, Low Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 82 of 141



Prepared for:

Garmin International, Inc.

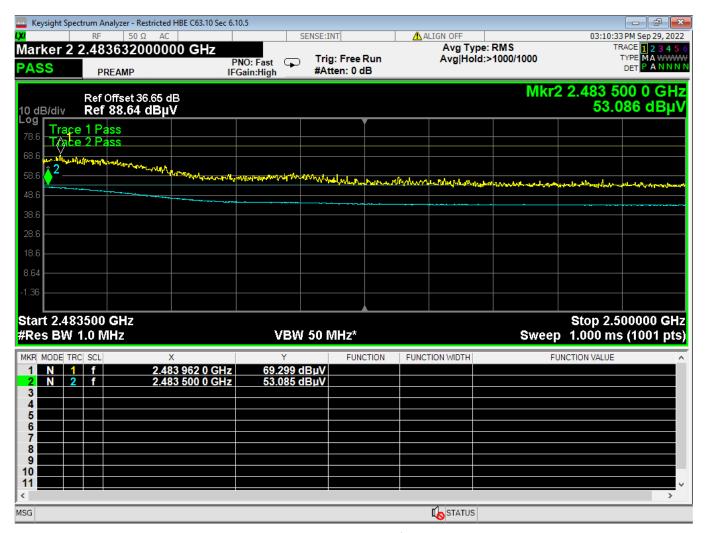

39 Higher Bandedge, Restricted, Wifi N, Low Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 83 of 141



Prepared for:

Garmin International, Inc.

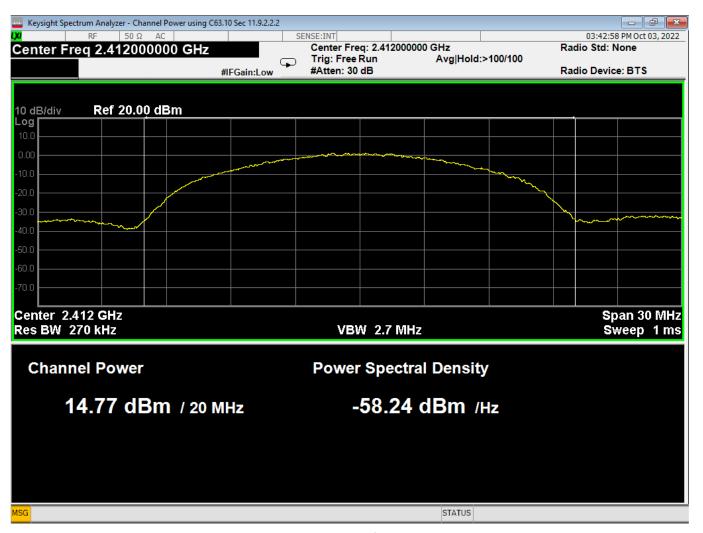

40 Average Power, Low, Wifi B, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 84 of 141



Prepared for:

Garmin International, Inc.

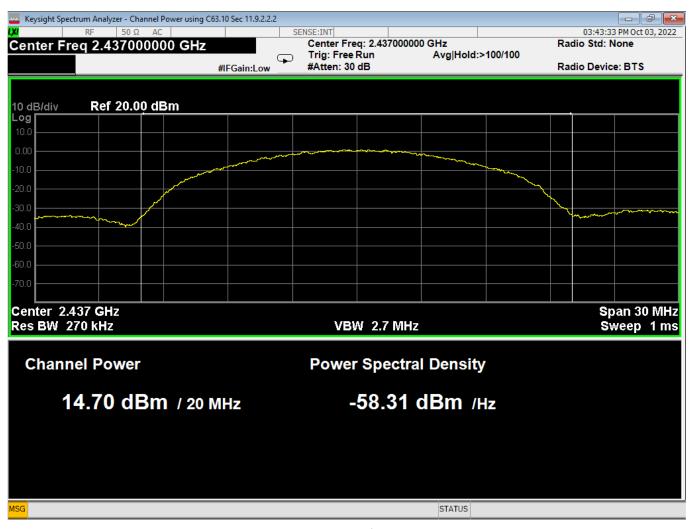

41 Average Power, Mid, Wifi B, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 85 of 141



Prepared for:

Garmin International, Inc.

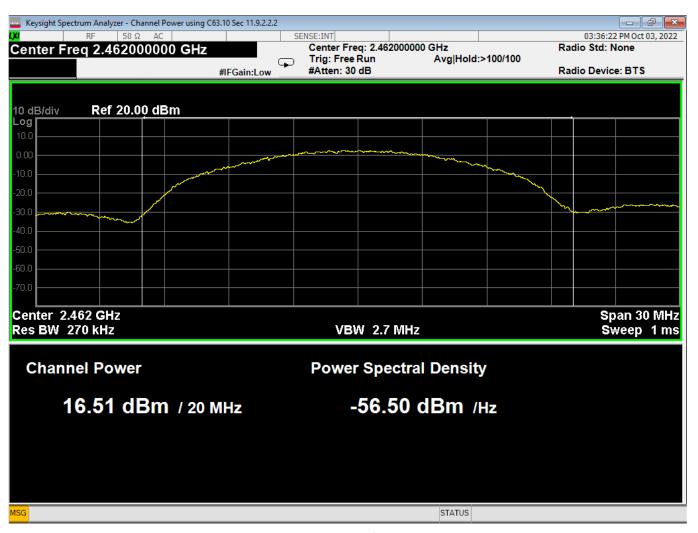


42 Average Power, High, Wifi B, High Data Rate

Page 86 of 141



Prepared for: 0

Garmin International, Inc.

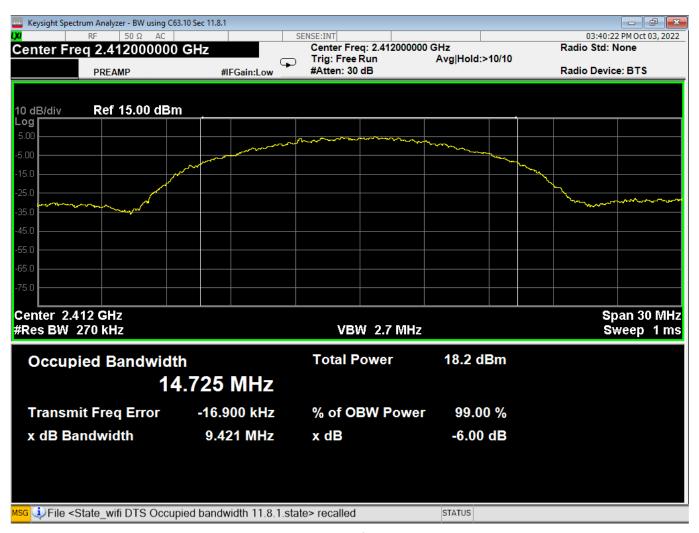

43 Bandwidth, Low, Wifi B, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 87 of 141



R20220615-20-E5 0 Report Number: Rev

Prepared for: Garmin International, Inc.

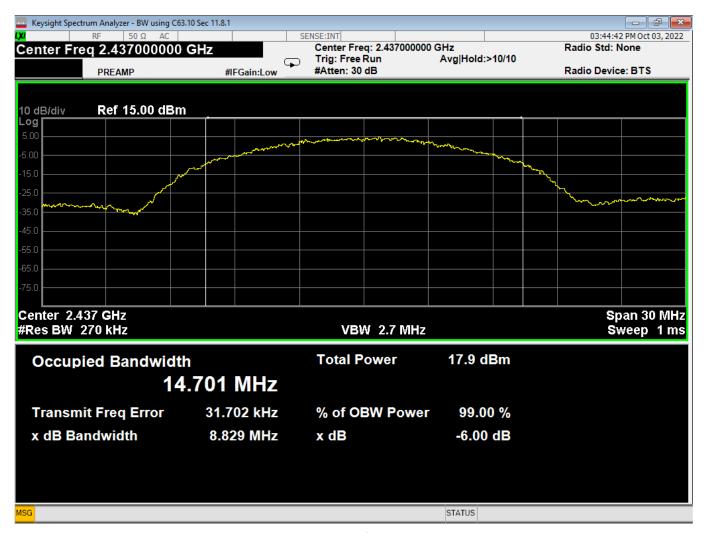

44 Bandwidth, Mid, Wifi B, High Data Rate

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521


Page 88 of 141



R20220615-20-E5 0 Report Number: Rev

Prepared for:

Garmin International, Inc.

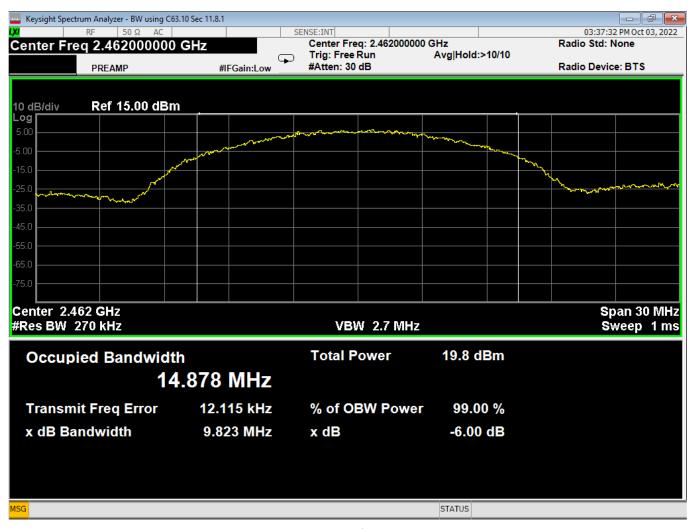


45 Bandwidth, High, Wifi B, High Data Rate

Page 89 of 141



Prepared for:

Garmin International, Inc.

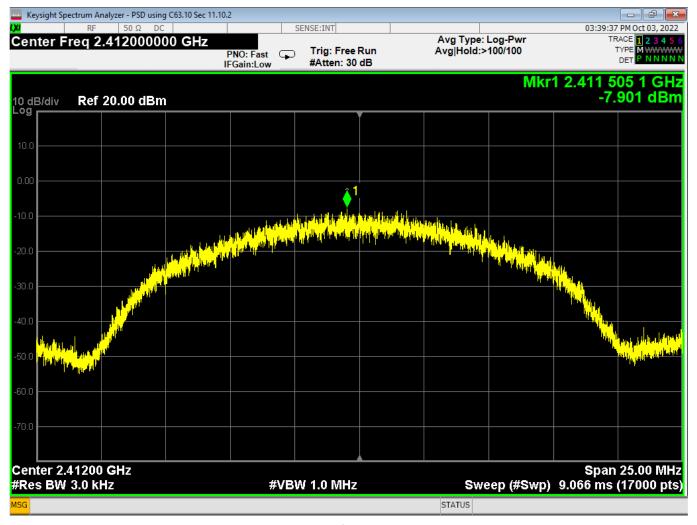


46 PSD, Low, Wifi B, High Data Rate

Page 90 of 141



Prepared for:

Garmin International, Inc.

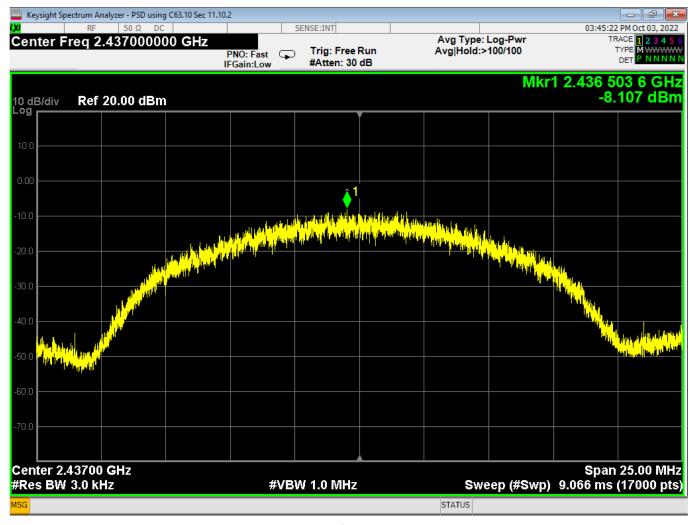

47 PSD, Mid, Wifi B, High Data Rate


Page 91 of 141



R20220615-20-E5 0 Report Number: Rev

Prepared for:

Garmin International, Inc.

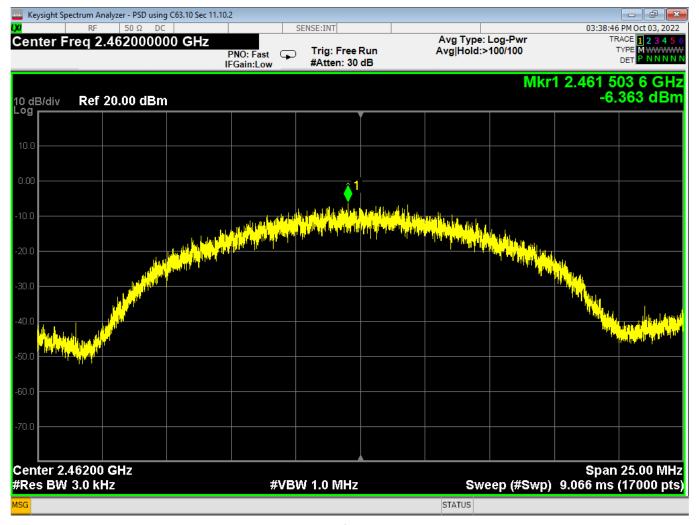


48 PSD, High, Wifi B, High Data Rate

Page 92 of 141



Prepared for: | Garm

Garmin International, Inc.

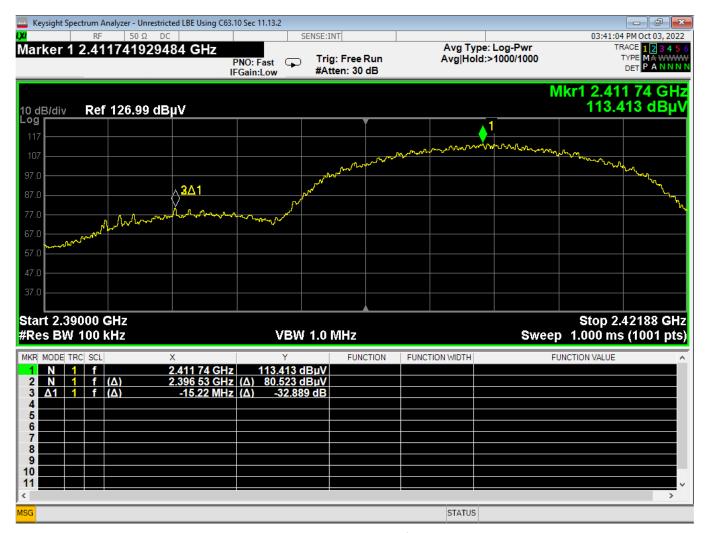

49 Lower Bandedge, Unrestricted, Wifi B, High Data Rate

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 93 of 141



Prepared for:

Garmin International, Inc.



50 Higher Bandedge, Unrestricted, Wifi B, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 94 of 141



Prepared for:

Garmin International, Inc.

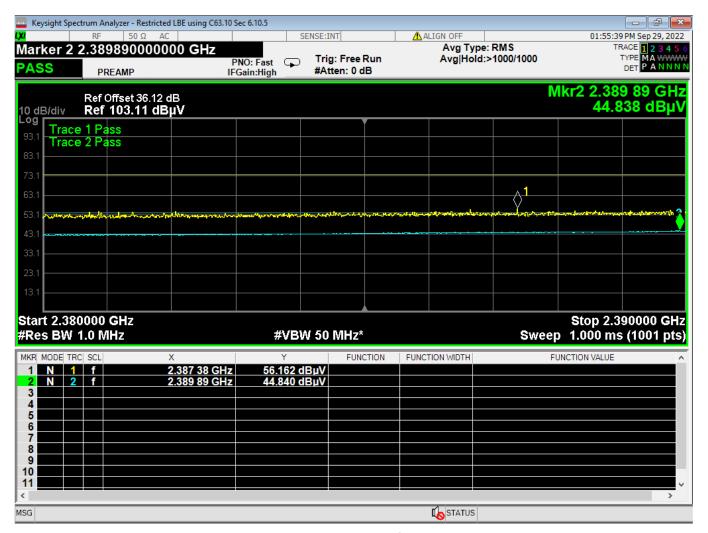


51 Lower Bandedge, Restricted, Wifi B, High Data Rate

Page 95 of 141



Prepared for:

Garmin International, Inc.

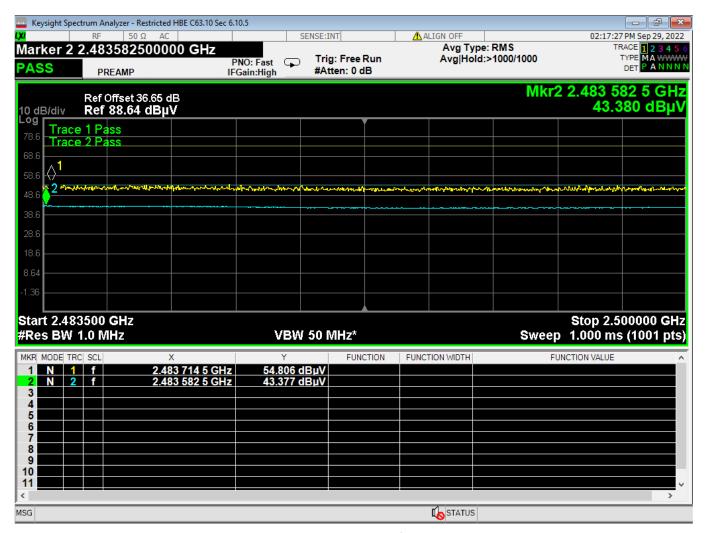

52 Higher Bandedge, Restricted, Wifi B, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 96 of 141



Prepared for:

Garmin International, Inc.

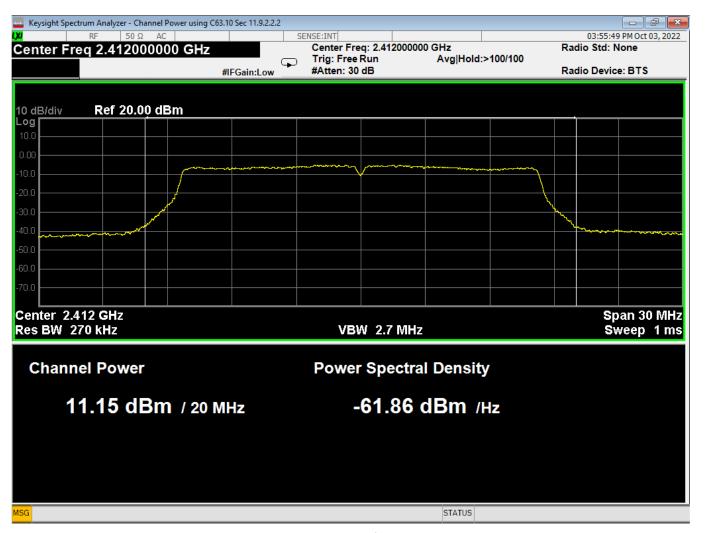

53 Average Power, Low, Wifi G, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 97 of 141



Prepared for: | Garmir

Garmin International, Inc.

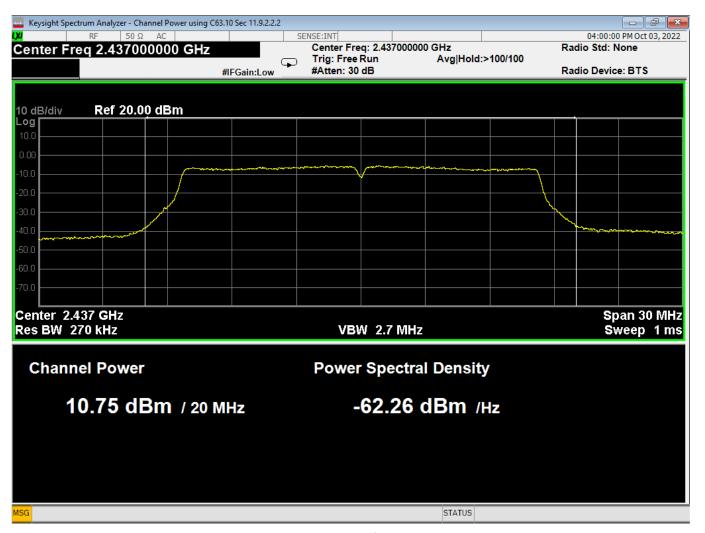


54 Average Power, Mid, Wifi G, High Data Rate

Page 98 of 141



Prepared for: | Garmin I

Garmin International, Inc.

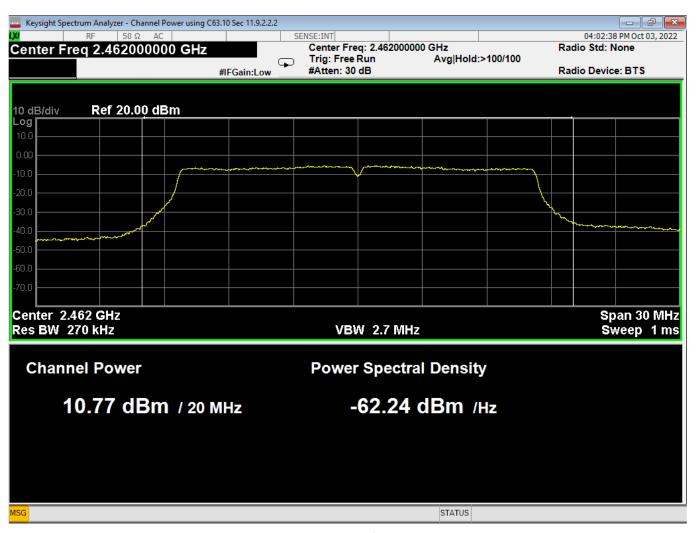

55 Average Power, High, Wifi G, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 99 of 141



Prepared for:

Garmin International, Inc.

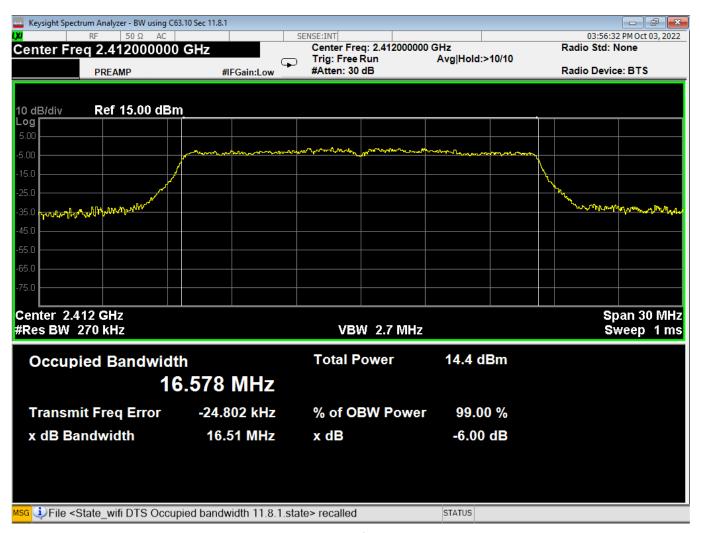

56 Bandwidth, Low, Wifi G, High Data Rate

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521


Page 100 of 141



R20220615-20-E5 0 Report Number: Rev

Prepared for:

Garmin International, Inc.

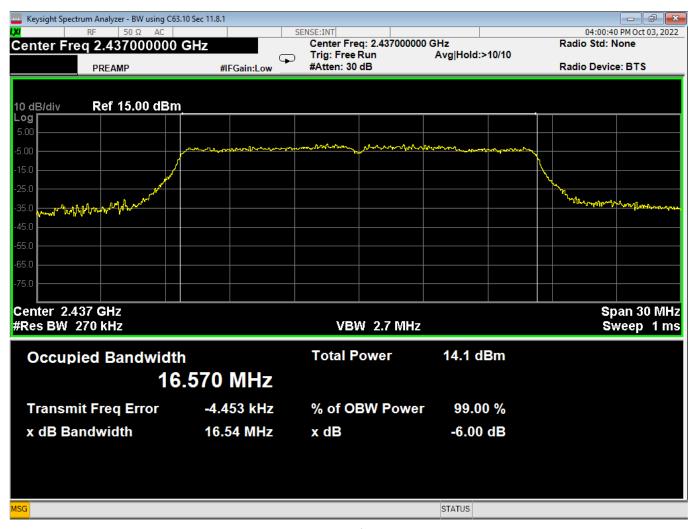

57 Bandwidth, Mid, Wifi G, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 101 of 141



Prepared for:

Garmin International, Inc.

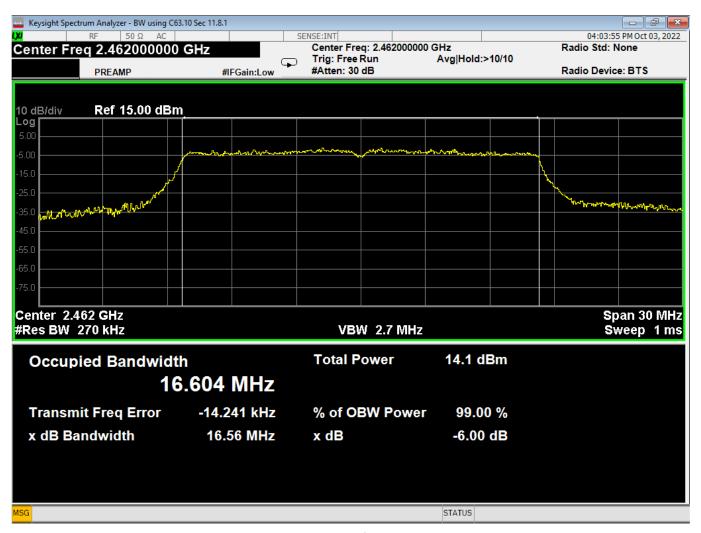

58 Bandwidth, High, Wifi G, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 102 of 141



Prepared for: | Gai

Garmin International, Inc.

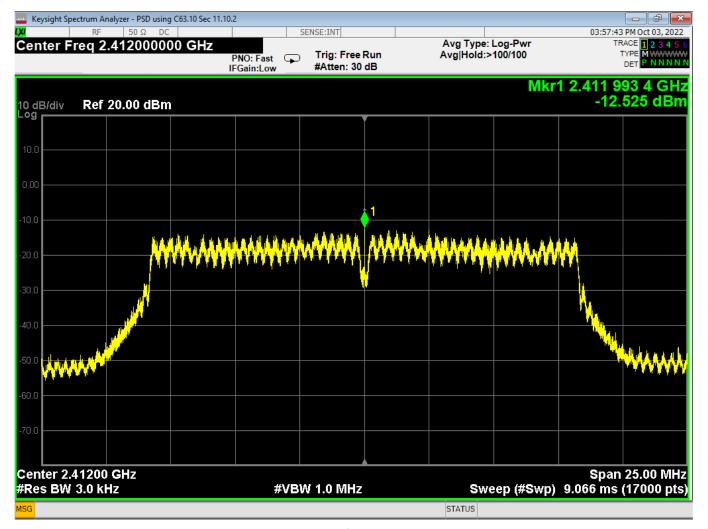

59 PSD, Low, Wifi G, High Data Rate


Page 103 of 141



R20220615-20-E5 0 Report Number: Rev

Prepared for:

Garmin International, Inc.

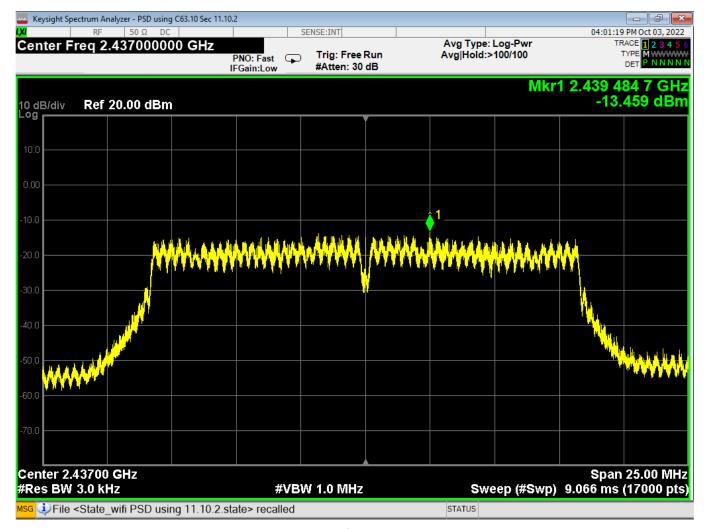


60 PSD, Mid, Wifi G, High Data Rate

Page 104 of 141



Prepared for:

Garmin International, Inc.

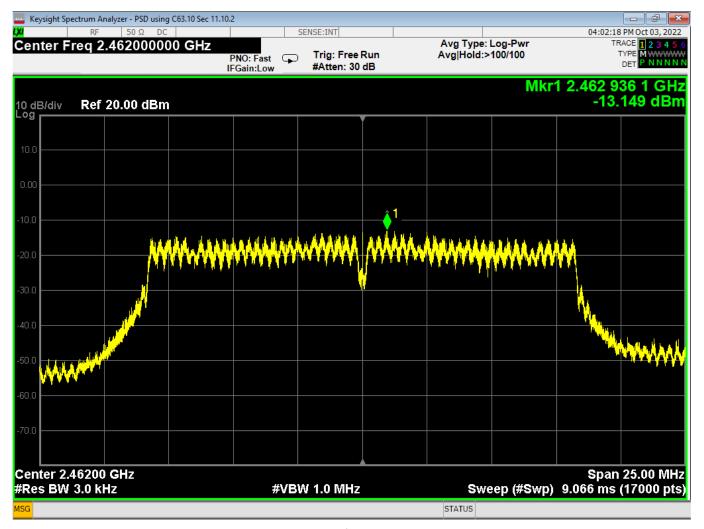


61 PSD, High, Wifi G, High Data Rate

Lincoln, NE 68521 Page 105 of 141



Prepared for: Gar

Garmin International, Inc.

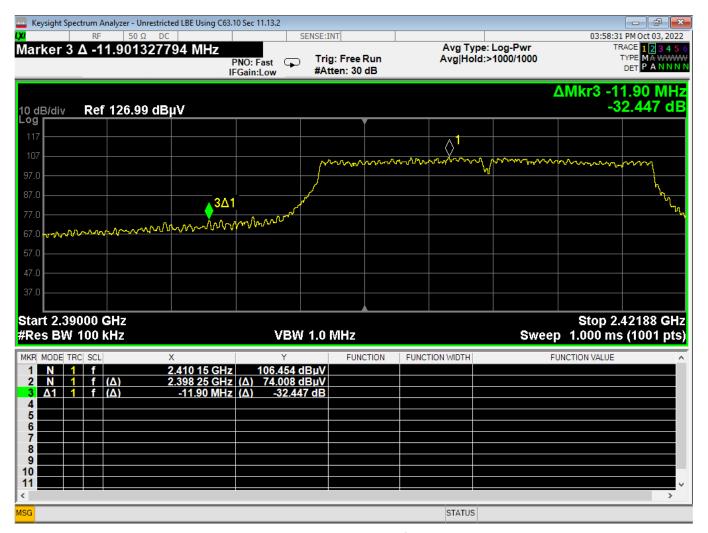

62 Lower Bandedge, Unrestricted, Wifi G, High Data Rate

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 106 of 141



Prepared for: | Ga

Garmin International, Inc.



63 Higher Bandedge, Unrestricted, Wifi G, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 107 of 141



Prepared for: | Garmin

Garmin International, Inc.

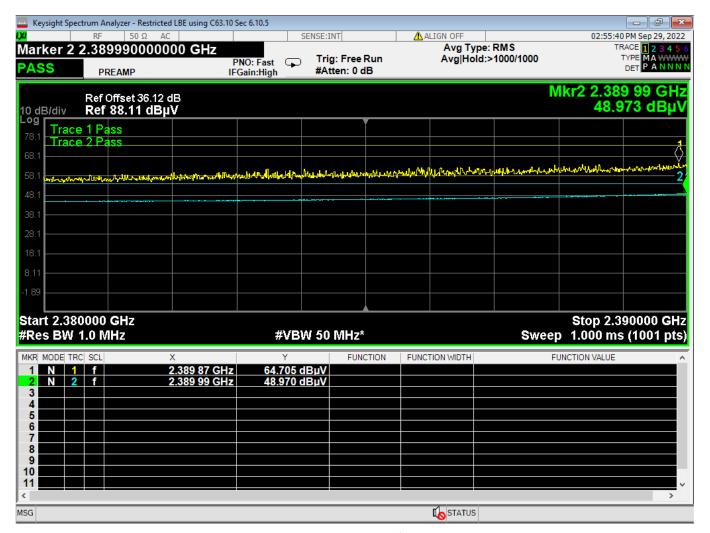

64 Lower Bandedge, Restricted, Wifi G, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 108 of 141



Prepared for: | G

Garmin International, Inc.

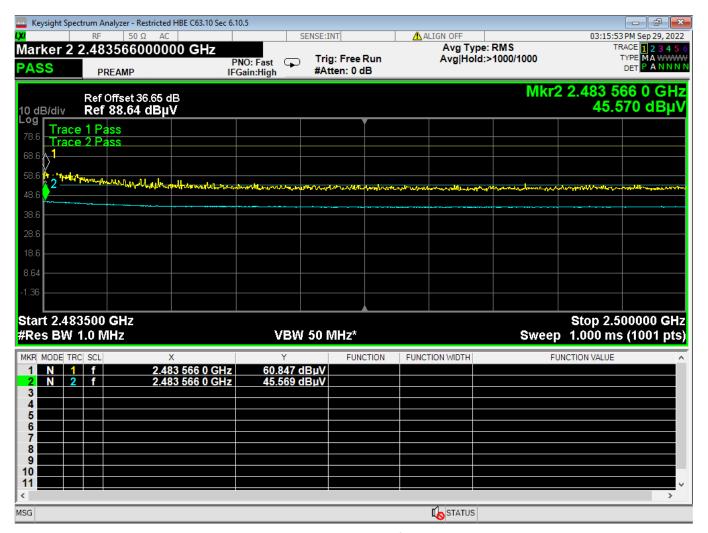

65 Higher Bandedge, Restricted, Wifi G, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 109 of 141



Prepared for:

Garmin International, Inc.

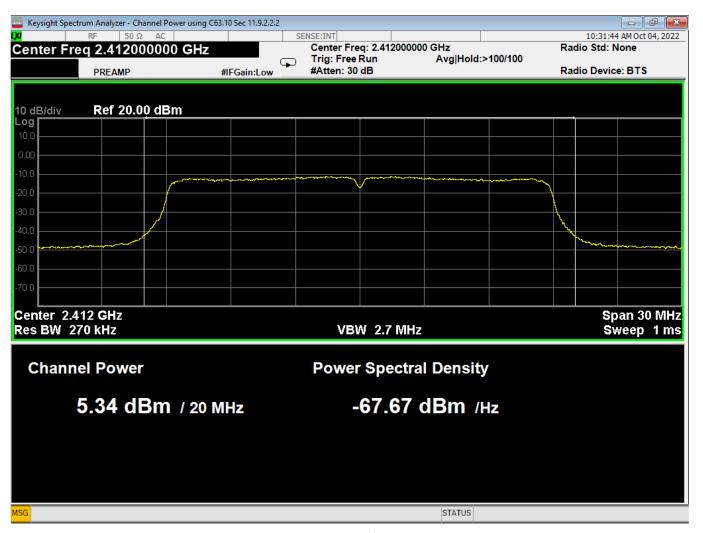


66 Average Power, Low, Wifi N, High Data Rate

Page 110 of 141



Prepared for: | Garmin

Garmin International, Inc.

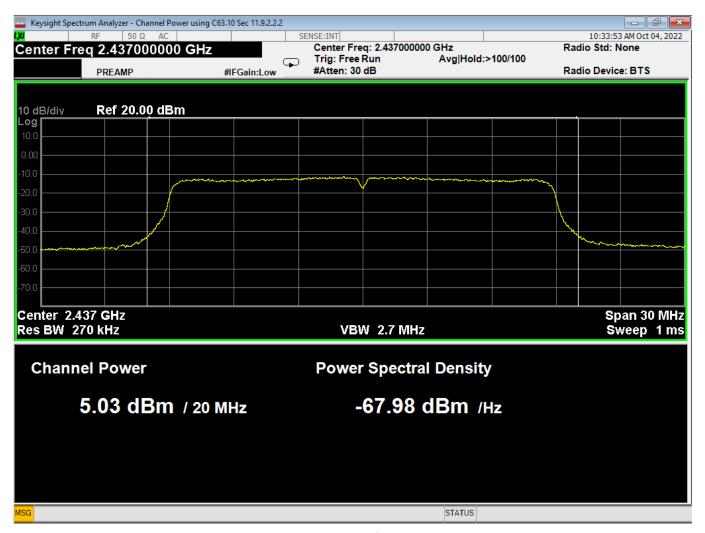


67 Average Power, Mid, Wifi N, High Data Rate

Lincoln, NE 68521 Page 111 of 141



Prepared for:

Garmin International, Inc.

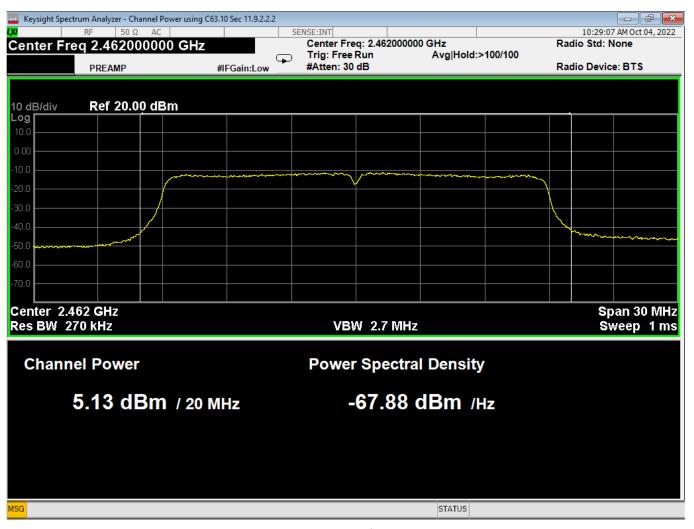

68 Average Power, High, Wifi N, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 112 of 141



Prepared for:

Garmin International, Inc.

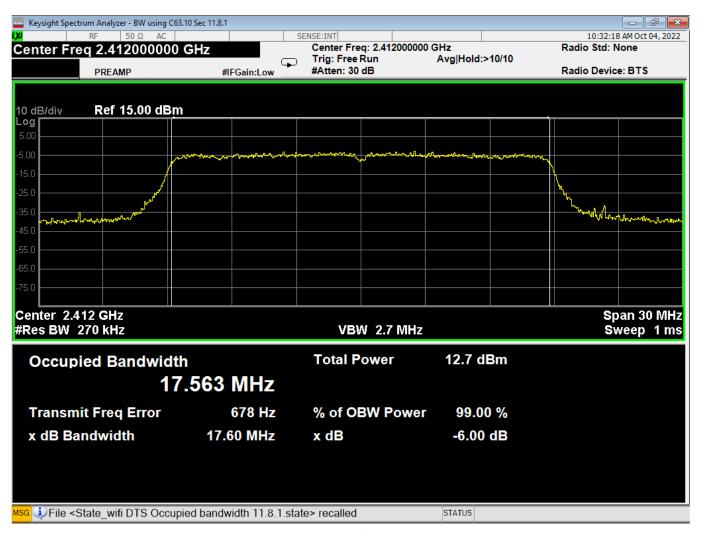

69 Bandwidth, Low, Wifi N, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 113 of 141



Prepared for:

Garmin International, Inc.

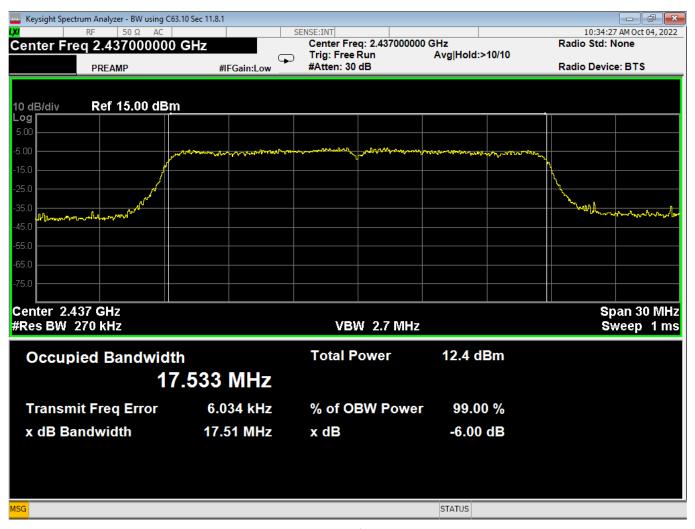

70 Bandwidth, Mid, Wifi N, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 114 of 141



Prepared for:

Garmin International, Inc.

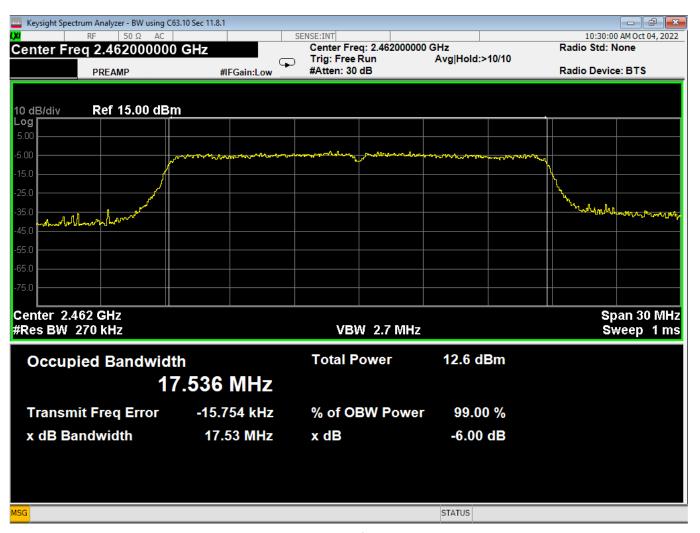


71 Bandwidth, High, Wifi N, High Data Rate

Lincoln, NE 68521 Page 115 of 141



Prepared for:

Garmin International, Inc.

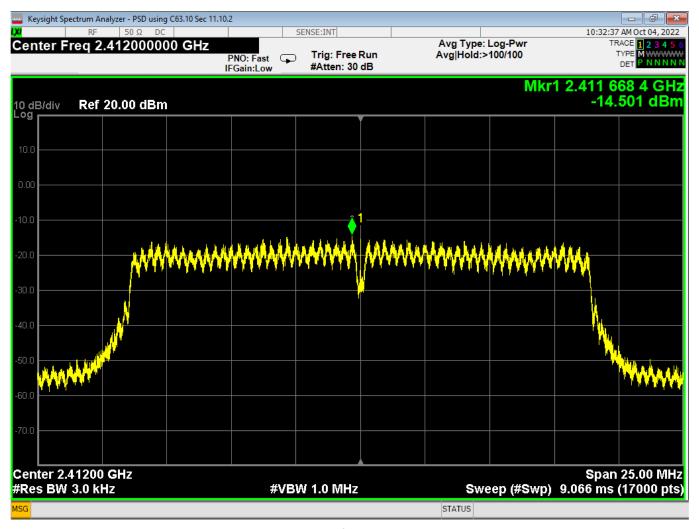


72 PSD, Low, Wifi N, High Data Rate

Page 116 of 141



Prepared for:

Garmin International, Inc.

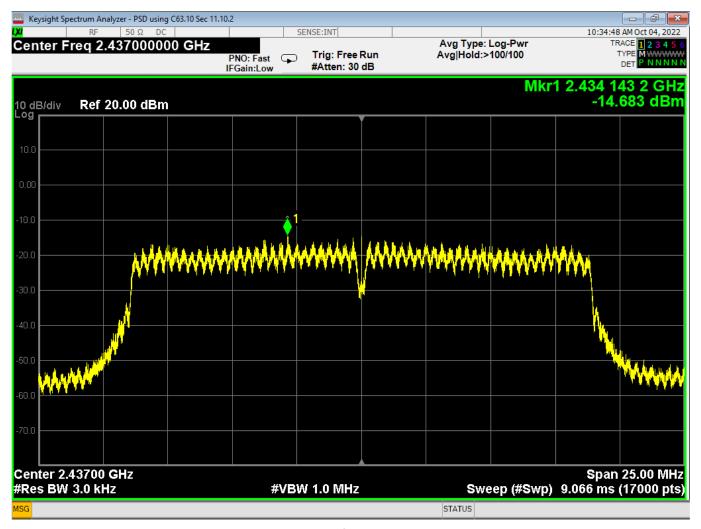


73 PSD, Mid, Wifi N, High Data Rate

Page 117 of 141



Prepared for:

Garmin International, Inc.

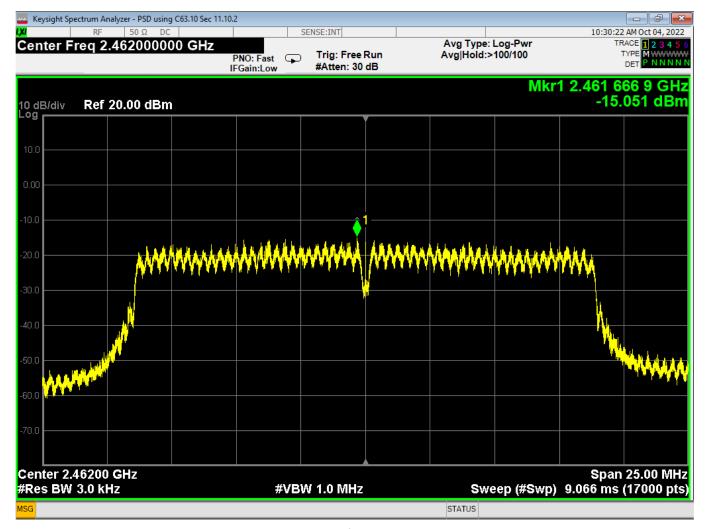


74 PSD, High, Wifi N, High Data Rate

Page 118 of 141



Prepared for: | Ga

Garmin International, Inc.

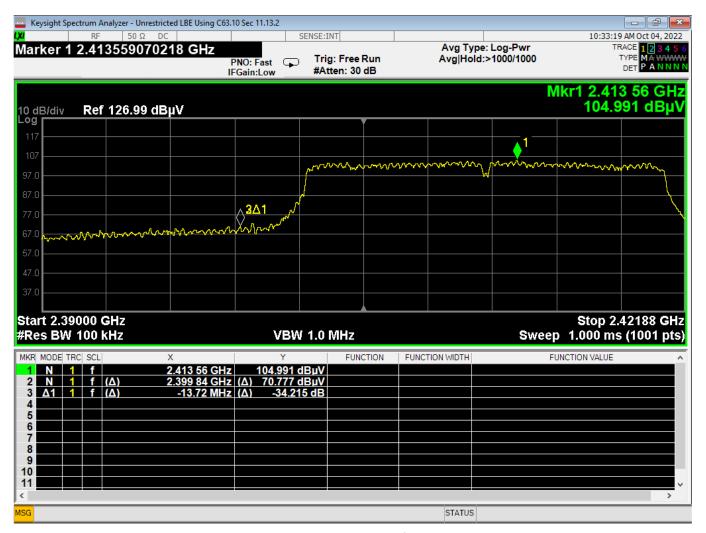

75 Lower Bandedge, Unrestricted, Wifi N, High Data Rate

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 119 of 141



Prepared for:

Garmin International, Inc.



76 Higher Bandedge, Unrestricted, Wifi N, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 120 of 141



Prepared for:

Garmin International, Inc.

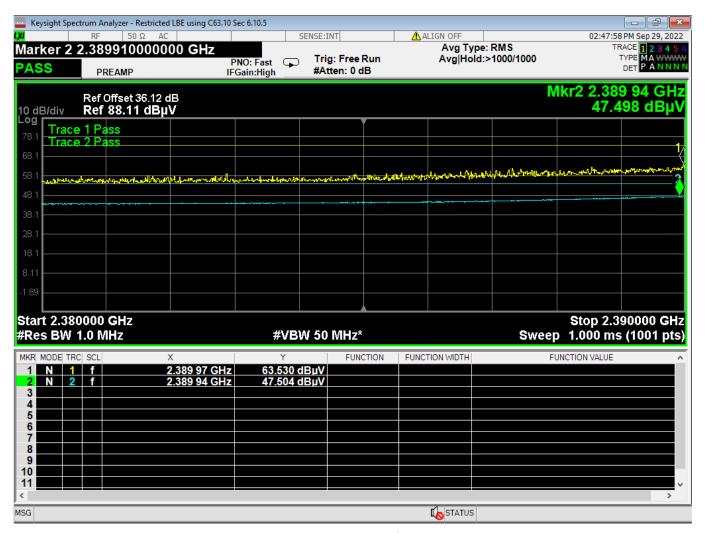

77 Lower Bandedge, Restricted, Wifi N, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 121 of 141



Prepared for:

Garmin International, Inc.

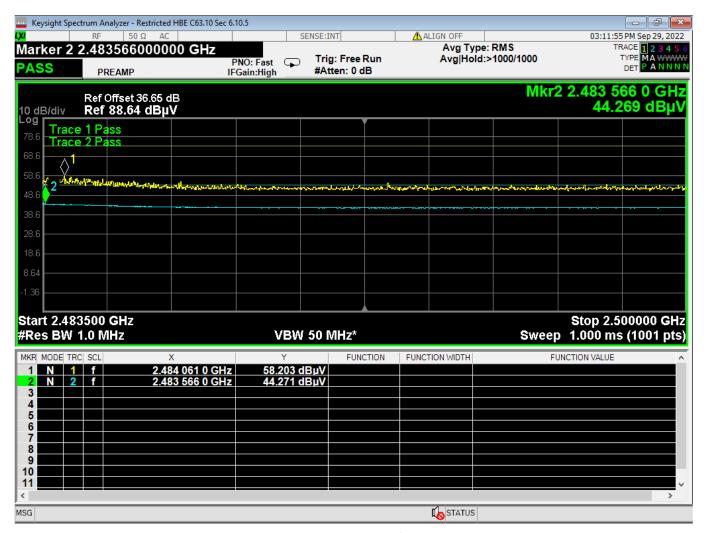

78 Higher Bandedge, Restricted, Wifi N, High Data Rate

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 122 of 141



Prepared for:

Garmin International, Inc.




79 6dB Bandwidth, Low, Wifi B, Low Data Rate

Lincoln, NE 68521 Page 123 of 141



Prepared for:

Garmin International, Inc.

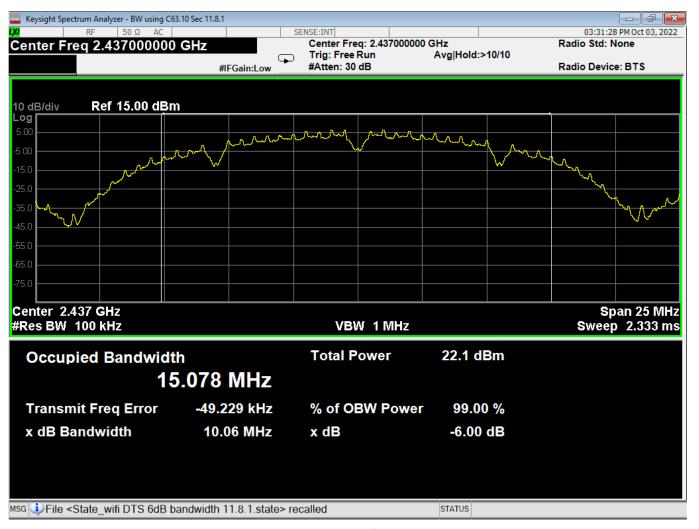


80 6dB Bandwidth, Mid, Wifi B, Low Data Rate

Page 124 of 141



Prepared for:

Garmin International, Inc.

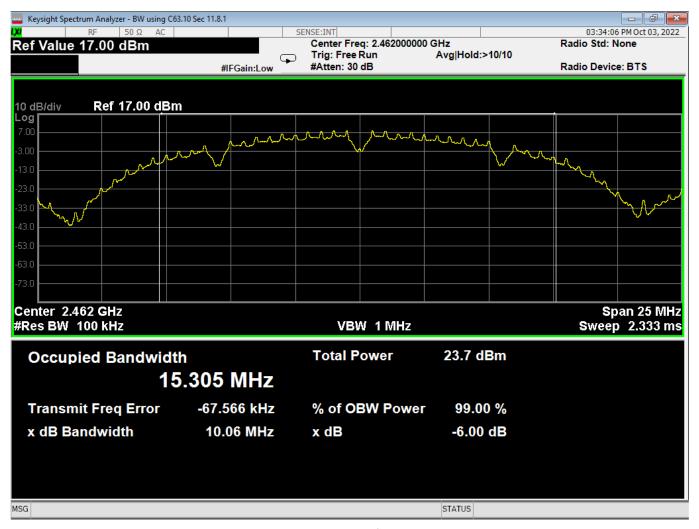


81 6dB Bandwidth, High, Wifi B, Low Data Rate

Page 125 of 141



Prepared for:

Garmin International, Inc.

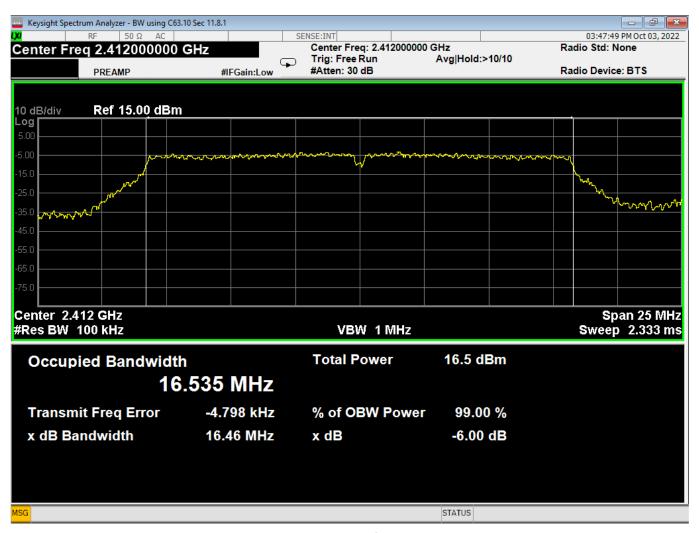


82 6dB Bandwidth, Low, Wifi G, Low Data Rate

Page 126 of 141



Prepared for:

Garmin International, Inc.

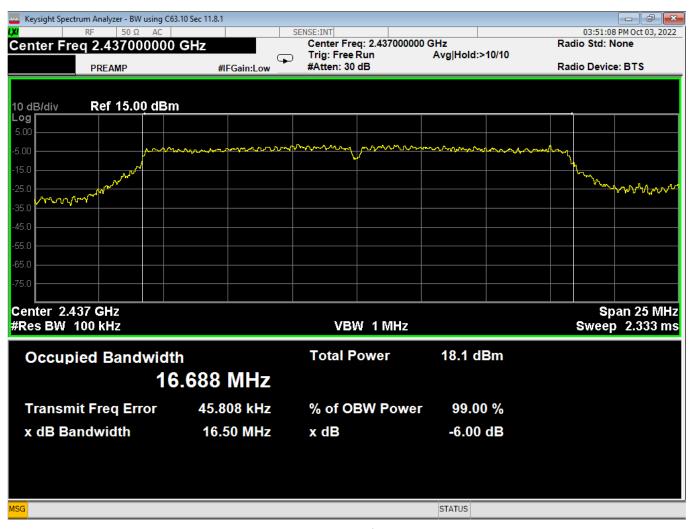


83 6dB Bandwidth, Mid, Wifi G, Low Data Rate

Page 127 of 141



Prepared for:

Garmin International, Inc.

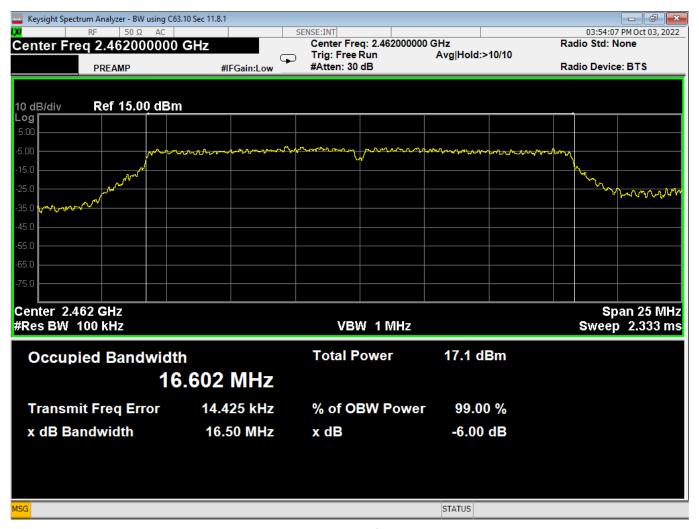

84 6dB Bandwidth, High, Wifi G, Low Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 128 of 141



Prepared for:

Garmin International, Inc.

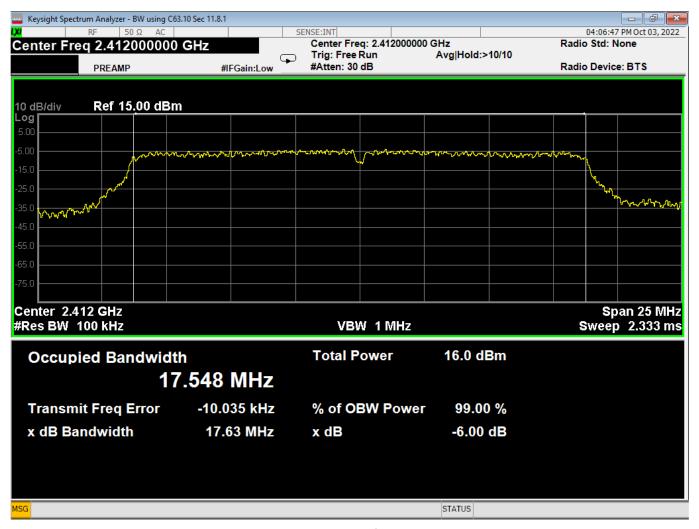


85 6dB Bandwidth, Low, Wifi N, Low Data Rate

Lincoln, NE 68521 Page 129 of 141



Prepared for:

Garmin International, Inc.

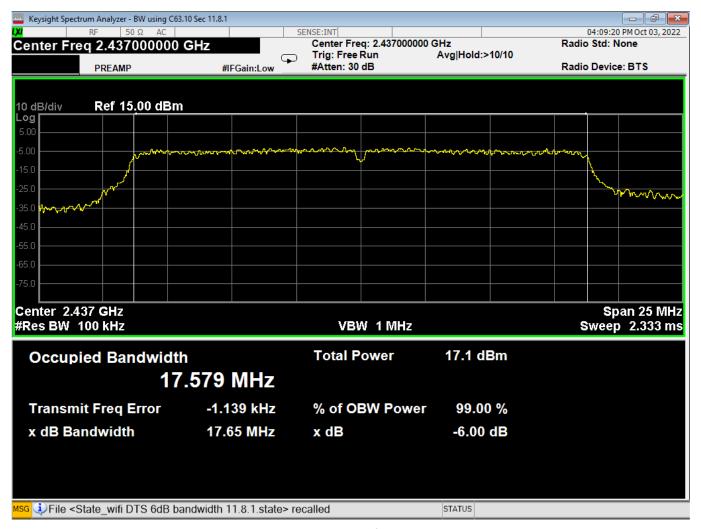


86 6dB Bandwidth, Mid, Wifi N, Low Data Rate

Page 130 of 141



Prepared for:

Garmin International, Inc.

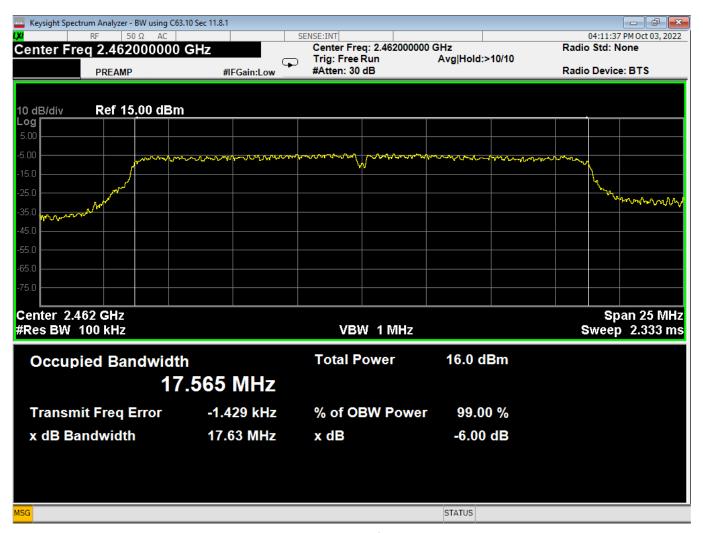

87 6dB Bandwidth, High, Wifi N, Low Data Rate

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 131 of 141



Prepared for:

Garmin International, Inc.



88 6dB Bandwidth, Low, Wifi B, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 132 of 141



Prepared for:

Garmin International, Inc.

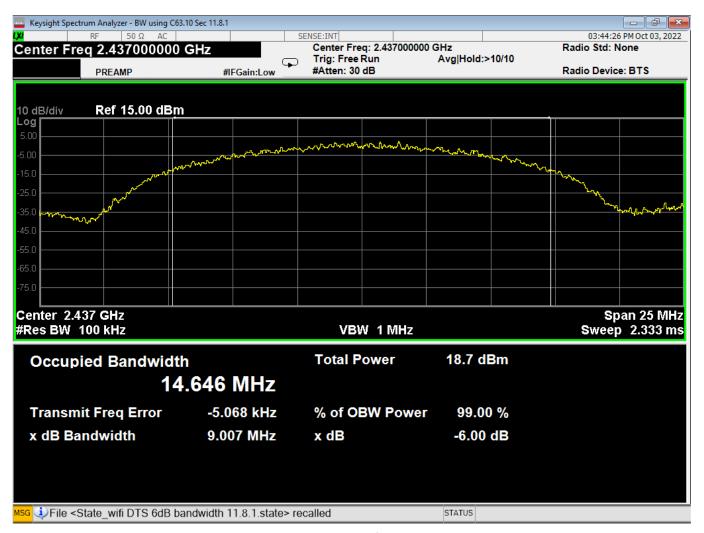

89 6dB Bandwidth, Mid, Wifi B, High Data Rate

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 133 of 141



Prepared for:

Garmin International, Inc.



90 6dB Bandwidth, High, Wifi B, High Data Rate

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 134 of 141



Prepared for:

Garmin International, Inc.



91 6dB Bandwidth, Low, Wifi G, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 135 of 141



Prepared for:

Garmin International, Inc.

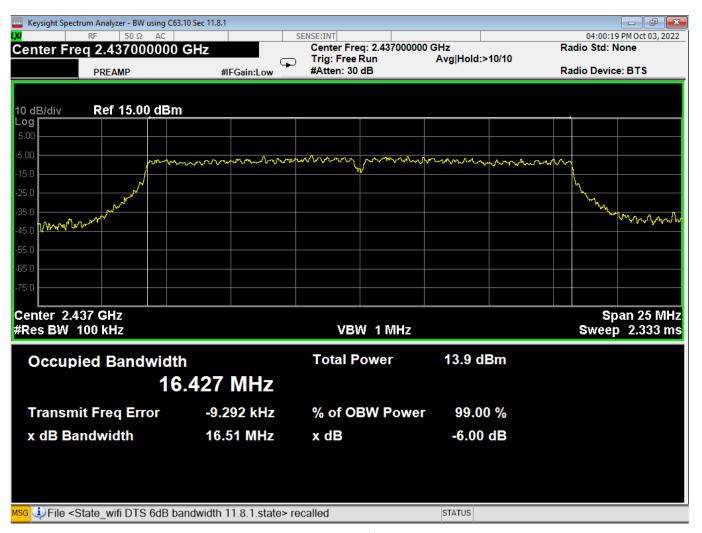


92 6dB Bandwidth, Mid, Wifi G, High Data Rate

Lincoln, NE 68521 Page 136 of 141



Prepared for:

Garmin International, Inc.

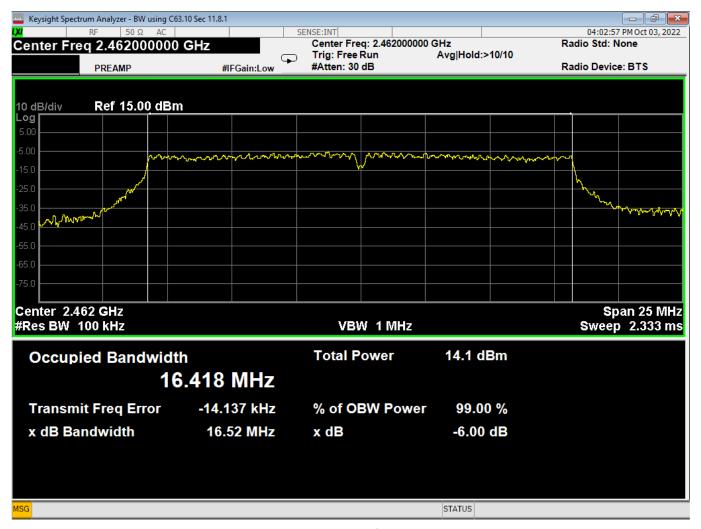

93 6dB Bandwidth, High, Wifi G, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 137 of 141



Prepared for:

Garmin International, Inc.

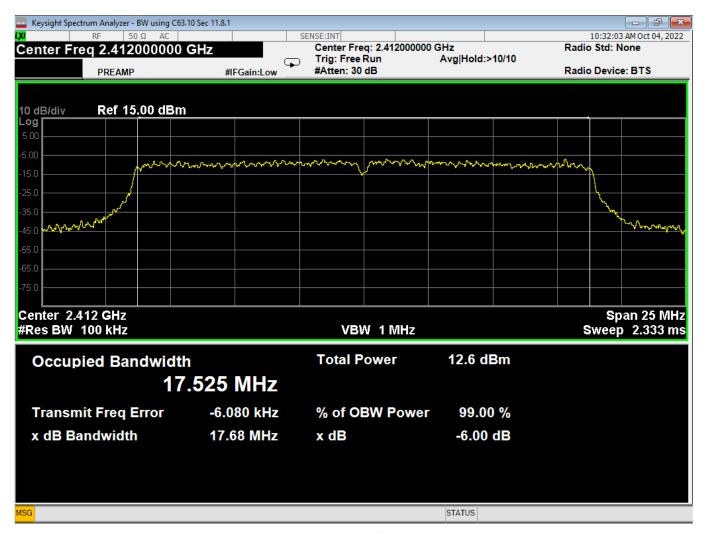

94 6dB Bandwidth, Low, Wifi N, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 138 of 141



Prepared for:

Garmin International, Inc.

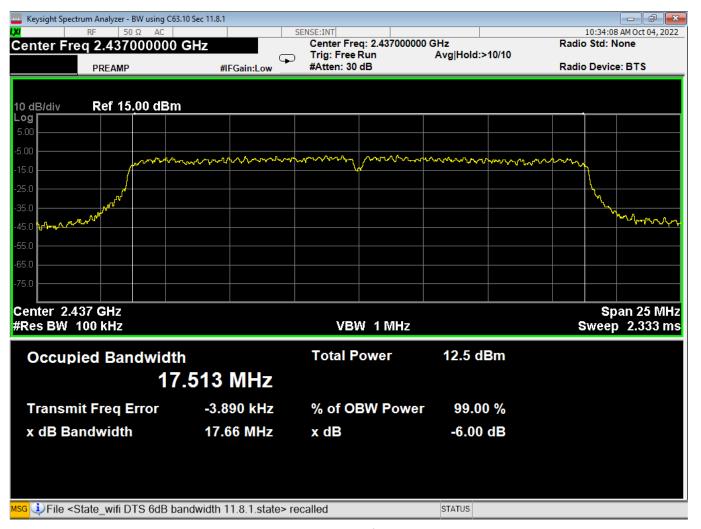

95 6dB Bandwidth, Mid, Wifi N, High Data Rate


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 139 of 141



Prepared for:

Garmin International, Inc.

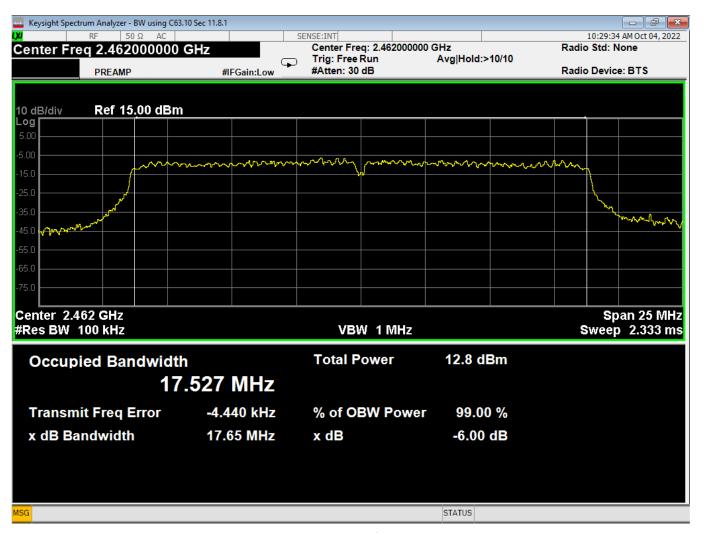

96 6dB Bandwidth, High, Wifi N, High Data Rate

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 140 of 141



Report Number:	R20220615-20-E5	Rev	0
Prepared for:	Garmin International, Inc.		

## REPORT END

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 141 of 141