

4740 Discovery Drive | Lincoln, NE 68521 tel- 402.323.6233 | tel -888.657.6860 | fax - 402.323.6238 info@nceelabs.com | http://nceelabs.com

FCC/ISED Test Report

Prepared for: Garmin International, Inc.

Address: 1200 E. 151st Street

Olathe, Kansas, 66062, USA

Lane

Product: AA4624

Test Report No: R20220615-20-E4A

Approved by:

Fox Lane,

EMC Test Engineer

DATE: December 7, 2022

Total Pages: 87

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.





 Report Number:
 R20220615-20-E4A
 Rev
 0

Prepared for: Garmin International, Inc.

REVISION PAGE

Rev. No.	Date	Description	
		Issued by FLane	
0	29 November 2022	Reviewed by KVepuri	
		Prepared by FLane	
A	7 December 2022	Corrected 6dB BW – FL	

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 2 of 87



Report Number:

Prepared for:

R20220615-20-E4A

Garmin International, Inc.

Rev

0

CONTENTS

Revi	ision Pag	ge	2
1.0	Sum	mary of test results	4
2.0		Description	
2.0		·	
	2.1	Equipment under test	
	2.2	Description of test modes	5
	2.3	Description of support units	5
3.0	Labo	oratory and General Test Description	6
	3.1	Laboratory description	6
	3.2	Test personnel	6
	3.3	Test equipment	7
	3.4	General Test Procedure and Setup for Radio Measuremnts	8
4.0	Resi	ults	
-1.0	4.1	Output Power	
	4.2	Bandwidth	
	4.3	Duty Cycle	13
	4.4	Radiated emissions	14
	4.5	Conducted Spurious Emissions	22
	4.6	Band edges	28
	4.7	Power Spectral Density	30
	4.8	Conducted AC Mains Emissions	31
	4.9	Antenna Gain	34
۸nn			
		: Sample Calculation	
		- Measurement Uncertainty	
App	endix C	- Graphs and Tables	39
REP	ORT EN	ID	87



Report Number:	R20220615-20-E4A	Rev	0
Prepared for:	Garmin International, Inc.		

1.0 SUMMARY OF TEST RESULTS

The worst-case measurements were reported in this report. Summary of test results presented in this report correspond to the following section:

FCC Part 15.247

The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISED RSS-Gen, Issue 5
- (3) ISED RSS-247, Issue 2

APPLIED STANDARDS AND REGULATIONS			
Standard Section	Test Type	Result	
FCC Part 15.35 RSS Gen, Issue 5, Section 6.10	Duty Cycle	Pass	
FCC Part 15.247(b)(3) RSS-247 Issue 2 Section 5.4(d)	Peak output power	Pass	
FCC Part 15.247(a)(2) RSS-247 Issue 2 Section 5.2	Bandwidth	Pass	
FCC Part 15.209 RSS-Gen Issue 5, Section 7.3	Receiver Radiated Emissions	Pass	
FCC Part 15.209 (restricted bands), 15.247 (unrestricted) RSS-247 Issue 2 Section 5.5, RSS-Gen Issue 5, Section 8.9	Transmitter Radiated Emissions	Pass	
FCC Part 15.247(e) RSS-247 Issue 2 Section 5.2	Power Spectral Density	Pass	
FCC Part 15.209, 15.247(d) RSS-247 Issue 2 Section 5.5	Band Edge Measurement	Pass	
FCC Part 15.207 RSS-Gen Issue 5, Section 8.8	Conducted Emissions	Pass	

Page 4 of 87



Report Number:	R20220615-20-E4A	Rev	0
Prepared for:	Garmin International, Inc.		

2.0 EUT DESCRIPTION

2.1 EQUIPMENT UNDER TEST

Summary and Operating Condition:

EUT	AA4624
IC	1792A-A4624
FCC ID	IPH-A4624
EUT Received	29 August 2022
EUT Tested	5 September 2022- 28 October 2022
Serial No. 3426363242 (Radiated Measurements) 3426363123 (Conducted Measurements)	
Operating Band 2400 – 2483.5 MHz	
Device Type	☑ GMSK ☑ GFSK □ BT BR □ BT EDR 2MB □ BT EDR 3MB □ 802.11x
Power Supply / Voltage Internal Battery / 5VDC Charger: Garmin (Phi Hong) Model: LACA04 GPN: 362-00112-00 (Representative Power Supply)	
Antenna Type / Gain (dBi)	Trace Antenna -3.29 dBi

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.2 DESCRIPTION OF TEST MODES

The operating range of the EUT is dependent on the device type found in section 2.1:

GFSK and GMSK 1MB Transmissions:

Channel	Frequency
Low	2402 MHz
Mid	2440 MHz
High	2480 MHz

GMSK 2MB Transmissions:

00	
Channel	Frequency
Low	2404 MHz
Mid	2440 MHz
High	2478 MHz

These are the only representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequency and designations.

2.3 DESCRIPTION OF SUPPORT UNITS

None

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive

Lincoln, NE 68521 Page 5 of 87



Report Number:	R20220615-20-E4A	Rev	0

Prepared for: | Garmin International, Inc.

3.0 LABORATORY AND GENERAL TEST DESCRIPTION

3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)

4740 Discovery Drive

Lincoln, NE 68521

A2LA Certificate Number: 1953.01
FCC Accredited Test Site Designation No: US1060
Industry Canada Test Site Registration No: 4294A
NCC CAB Identification No: US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of 35 \pm 4%

Temperature of 22 \pm 3° Celsius



3.2 TEST PERSONNEL

No.	PERSONNEL	TITLE	ROLE
1	Fox Lane	Test Engineer	Review/Testing and Report
2	Blake Winter	Test Engineer	Testing
3	Grace Larsen	Test Engineer	Testing
4	Ethan Schmidt	Test Technician	Testing

Notes: All personnel are permanent staff members of NCEE Labs. No testing or review was sub-contracted or performed by sub-contracted personnel.

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive

Lincoln, NE 68521 Page 6 of 87



Report Number:	R20220615-20-E4A	Rev	0
Prepared for:	Garmin International, Inc.		

3.3 TEST EQUIPMENT

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Keysight MXE Signal Analyzer (44GHz)**	N9038A	MY59050109	July 19, 2022	July 19, 2024
Keysight MXE Signal Analyzer (26.5GHz)**	N9038A	MY56400083	July 19, 2022	July 19, 2024
Keysight EXA Signal Analyzer**	N9010A	MY56070862	July 20, 2021	July 20, 2023
SunAR RF Motion	JB1	A082918-1	July 26, 2022	July 26, 2023
ETS EMCO Red Horn Antenna	3115	00218655	July 21, 2022	July 21, 2023
Com-Power LISN, Single Phase**	LI-220C	20070017	July 18, 2022	July 18, 2024
8447F POT H64 Preamplifier*	8447F POT H64	3113AD4667	March 21, 2022	March 21, 2024
Rohde & Schwarz Preamplifier*	TS-PR18	3545700803	August 22, 2022	August 22, 2024
Trilithic High Pass Filter*	6HC330	23042	March 21, 2022	March 21, 2024
ETS – Lindgren- VSWR on 10m Chamber***	10m Semi- anechoic chamber- VSWR	4740 Discovery Drive	July 30, 2020	July 30, 2023
NCEE Labs-NSA on 10m Chamber*	10m Semi- anechoic chamber-NSA	NCEE-001	May 25, 2022	May 25, 2024
TDK Emissions Lab Software	V11.25	700307	NA	NA
RF Cable (preamplifier to antenna)*	MFR-57500	90-195-040	August 22, 2022	August 22, 2024
RF Cable (antenna to 10m chamber bulkhead)*	FSCM 64639	01E3872	September 24, 2021	September 24, 2023
RF Cable (10m chamber bulkhead to control room bulkhead)*	FSCM 64639	01E3864	September 24, 2021	September 24, 2023
RF Cable (control room bulkhead to test receiver)*	FSCM 64639	01F1206	September 24, 2021	September 24, 2023
N connector bulkhead (10m chamber)*	PE9128	NCEEBH1	September 24, 2021	September 24, 2023
N connector bulkhead (control room)*	PE9128	NCEEBH2	September 24, 2021	September 24, 2023

^{*}Internal Characterization

Notes:

All equipment is owned by NCEE Labs and stored permanently at NCEE Labs facilities.

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive

Lincoln, NE 68521 Page 7 of 87

^{**2} Year Cal Cycle

^{***3} Year Cal Cycle



3.4 GENERAL TEST PROCEDURE AND SETUP FOR RADIO MEASUREMNTS

Measurement type presented in this report (Please see the checked box below):

Conducted ⊠

The conducted measurements were performed by connecting the output of the transmitter directly into a spectrum analyzer using an impedance matched cable and connector soldered to the EUT in place of the antenna. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.



Figure 1 - Bandwidth Measurements Test Setup

Radiated ⊠

All the radiated measurements were taken at a distance of 3m from the EUT. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

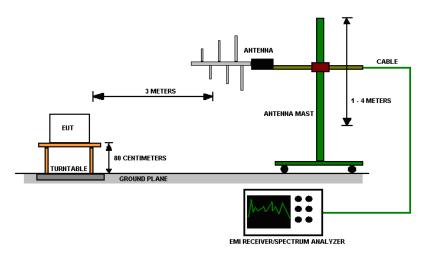


Figure 2 - Radiated Emissions Test Setup

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 8 of 87



Prepared for: | Garmin International, Inc.

4.0 RESULTS

DTS Radio Measurements								
CHANNEL	Transmitter	Occupied Bandwidth (kHz)	6 dB Bandwidth (kHz)	AVERAGE OUTPUT POWER (dBm)	AVERAGE OUTPUT POWER (mW)	PSD (dBm)	RESULT	
Low	GFSK	1323.10	879.10	0.100	1.023	-17.109	PASS	
Mid	GFSK	1329.60	890.60	3.010	2.000	-12.55	PASS	
High	GFSK	1479.80	928.00	-1.140	0.769	-17.563	PASS	
Low	GMSK 1Mb	1310.90	790.50	0.070	1.016	-17.324	PASS	
Mid	GMSK 1Mb	1265.40	767.50	2.830	1.919	-13.704	PASS	
High	GMSK 1Mb	1316.60	866.80	-1.240	0.752	-18.022	PASS	
Low	GMSK 2Mb	2515.60	1395.00	3.300	2.138	-13.552	PASS	
Mid	GMSK 2Mb	2550.40	1439.00	2.910	1.954	-14.429	PASS	
High	GMSK 2Mb	2492.10	1413.00	-1.210	0.757	-18.071	PASS	
_		6 dB Bandwidth Li		Peak Output Po				
	,		Unrestricted E			, ,		
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level (dBuV)	Relative Fundamental (dBuV)	Delta (dB)	Min Delta (dB)	Result	
Low	GMSK 1Mb	2400.00	63.96	105.757	39.797	30.00	PASS	
Low	GMSK 2Mb	2400.00	64.37	107.268	42.627	30.00	PASS	
Low	GFSK	2400.00	58.989	105.668	36.815	30.00	PASS	
High	GMSK 1Mb	2483.50	51.268	104.538	48.664	30.00	PASS	
High	GMSK 2Mb	2483.50	58.941	102.579	42.055	30.00	PASS	
High	GFSK	2483.50	52.82	104.528	44.105	30.00	PASS	
		P	eak Restricted	Band-Edge				
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result	
Low	GMSK 1Mb	2390.00	53.093	Peak	73.98	20.89	PASS	
Low	GMSK 2Mb	2390.00	53.257	Peak	73.98	20.72	PASS	
Low	GFSK	2390.00	53.986	Peak	73.98	19.99	PASS	
High	GMSK 1Mb	2483.50	54.659	Peak	73.98	19.32	PASS	
High	GMSK 2Mb	2483.50	56.981	Peak	73.98	17.00	PASS	
High	GFSK	2483.50	54.879	Peak	73.98	19.10	PASS	
	is the peak limi	t taken from FCC	Part 15.209					



 Report Number:
 R20220615-20-E4A
 Rev
 0

Prepared for: Garmin International, Inc.

	Average Restricted Band-Edge										
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result				
Low	GMSK 1Mb	2390.00	40.983	Average	53.98	13.00	PASS				
Low	GMSK 2Mb	2390.00	41.83	Average	53.98	12.15	PASS				
Low	GFSK	2390.00	41.13	Average	53.98	12.85	PASS				
High	GMSK 1Mb	2483.50	43.113	Average	53.98	10.87	PASS				
High	GMSK 2Mb	2483.50	46.441	Average	53.98	7.54	PASS				
High	GFSK	2483.50	43.172	Average	53.98	10.81	PASS				
*Limit shown	is the average	limit taken from FC	C Part 15.209)	•	•					



4.1

 Report Number:
 R20220615-20-E4A
 Rev
 0

 Prepared for:
 Garmin International, Inc.

.

OUTPUT POWER

Test Method: All measurements were performed using the section 11.9.2.2.2 from ANSI C63.10.

Limits of power measurements:

For FCC Part 15.247 Device:

The maximum allowed output power is 30 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

- 1. All the output power plots can be found in the Appendix C.
- 2. All the measurements were found to be compliant.
- 3. Tabulated data is listed in section 4.0.

Page 11 of 87



Report Number:	R20220615-20-E4A	Rev	0
Prenared for:	Garmin International Inc		

4.2 BANDWIDTH

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of bandwidth measurements:

For FCC Part 15.247 Device:

The 99% occupied bandwidth is for informational purpose only. The 6dB bandwidth of the signal must be greater than 500 kHz.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

- 1. All the bandwidth plots can be found in the Appendix C.
- 2. All the measurements were found to be compliant.
- 3. Tabulated data is listed in section 4.0.

Page 12 of 87



Report Number:	R20220615-20-E4A	Rev	0
Prepared for:	Garmin International, Inc.		

4.3 DUTY CYCLE

Test Method:

All Modulations/transmitters shown have a duty cycle of >98%.

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 13 of 87



 Report Number:
 R20220615-20-E4A
 Rev
 0

Prepared for: | Garmin International, Inc.

4.4 RADIATED EMISSIONS

Test Method: ANSI C63.10-2013, Section 6.5, 6.6

Limits for radiated emissions measurements:

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH (µV/m)	MEASUREMENT DISTANCE (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level (dBuV/m) = 20 * log * Emission level (μ V/m).
- 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.
- 4. The EUT was tested for spurious emissions while running off of battery power and external USB power. The worse-case emissions were produced while running off of USB power, so results from this mode are presented.

Page 14 of 87



Report Number: R20220615-20-E4A Rev 0

Prepared for: Garmin International, Inc.

Test procedures:

a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1Ghz and 1.5m for measurements from 1GHz and higher.

- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.



Prepared for: | Garmin International, Inc.

Test setup:

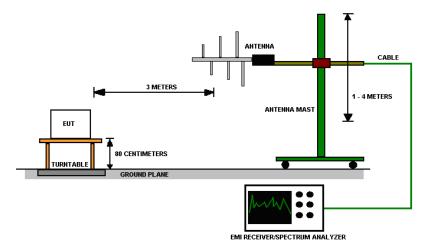


Figure 3 - Radiated Emissions Test Setup

NOTE:

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
- 2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

Deviations from test standard:

No deviation.

EUT operating conditions

Details can be found in section 2.1 of this report.

Page 16 of 87



 Report Number:
 R20220615-20-E4A
 Rev
 0

Prepared for: Garmin International, Inc.

Test results:

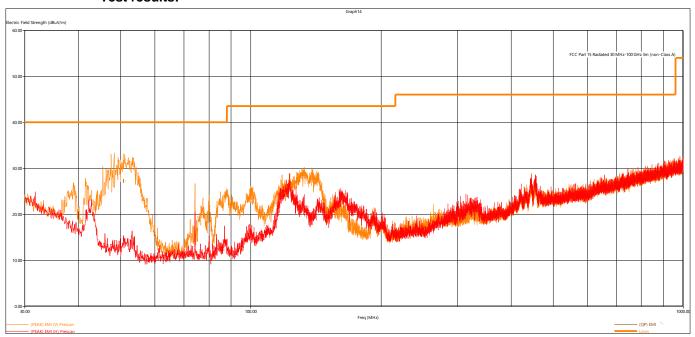


Figure 4 - Radiated Emissions Plot, Receive

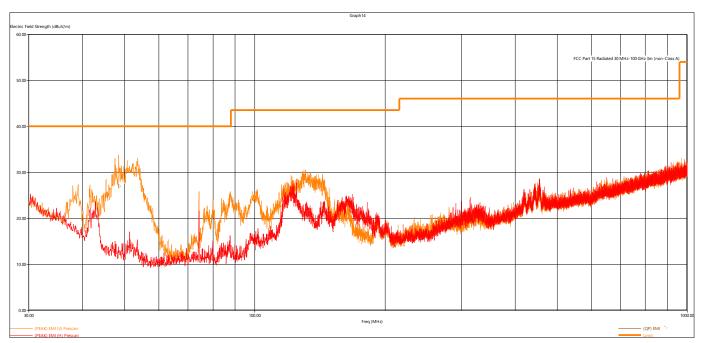


Figure 5 - Radiated Emissions Plot, GFSK



Rev

0

Prepared for:

Garmin International, Inc.

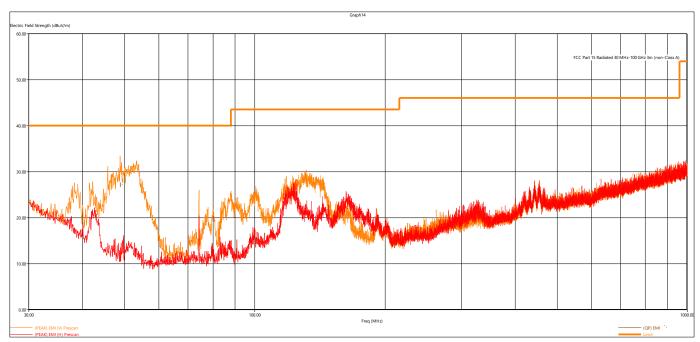


Figure 6 - Radiated Emissions Plot, GMSK 1MB

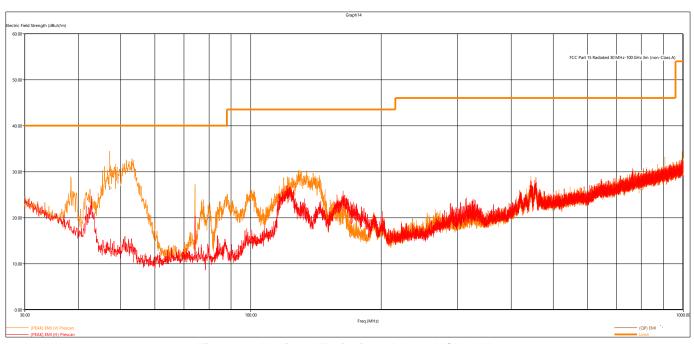


Figure 7 - Radiated Emissions Plot, GMSK 2MB

REMARKS:

- 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Limit value Emission level



Report Number:	R20220615-20-E4A	Rev	0
Prenared for:	Garmin International Inc		

Quasi-Peak Measurements, GMSK-GFSK									
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation	
MHz	dBµV/m	dBμV/m	dB	cm.	deg.				
48.382080	26.87	40.00	13.13	108.00	140.00	V	Low	GFSK	
48.788640	27.08	40.00	12.92	107.00	99.00	V	Low	GMSK 1MB	
47.134080	26.42	40.00	13.58	112.00	328.00	V	Low	GMSK 2MB	
50.845200	27.22	40.00	12.78	116.00	39.00	V		RX	

The EUT was maximized in all 3 orthogonal axes. The worst-case is shown in the plot and table above.

All other measurements were found to be at least 6 dB Below the limit.



Report Number: R20220615-20-E4A Rev 0

Prepared for: Garmin International, Inc.

	Peak Measurements, GMSK-GFSK							
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dBµV/m	dBμV/m	dB	cm.	deg.			
2402.232000	92.79	NA	NA	202	120	Н	Low	GMSK 1MB
2439.716000	96.86	NA	NA	186	120	Н	Mid	GMSK 1MB
2479.712000	93.30	NA	NA	366	122	Н	High	GMSK 1MB
2403.496000	96.20	NA	NA	393	120	Н	Low	GMSK 2MB
2440.438000	96.65	NA	NA	132	345	Н	Mid	GMSK 2MB
2477.552000	92.95	NA	NA	368	122	Н	High	GMSK 2MB
2402.244000	92.92	NA	NA	390	122	Н	Low	GFSK
2440.258000	97.27	NA	NA	332	122	Н	Mid	GFSK
2479.716000	93.56	NA	NA	421	125	Н	High	GFSK
7205.536000	51.92	73.98	22.06	401	147	V	Low	GFSK
7319.384000	54.52	73.98	19.46	381	147	V	Mid	GFSK
7438.858000	51.13	73.98	22.85	188	156	V	High	GFSK
7205.372000	53.89	73.98	20.09	135	203	Н	Low	GMSK 1MB
7319.572000	54.00	73.98	19.98	473	149	V	Mid	GMSK 1MB
7438.644000	51.62	73.98	22.36	458	147	V	High	GMSK 1MB
7213.174000	53.39	73.98	20.59	199	201	Н	Low	GMSK 2MB
7321.702000	54.84	73.98	19.14	127	216	Н	Mid	GMSK 2MB
7432.322000	52.28	73.98	21.70	388	210	V	High	GMSK 2MB

The EUT was maximized in all 3 orthogonal axes. The worst-case is shown in the plot and table above.

All other measurements were found to be at least 6 dB Below the limit.



Report Number:	R20220615-20-E4A	Rev	0
Prepared for:	Garmin International, Inc.		

	Average Measurements, GMSK-GFSK							
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dBµV/m	dBµV/m	dB	cm.	deg.			
2402.232000	90.08	NA	NA	202	120	Н	Low	GMSK 1MB
2439.716000	93.82	NA	NA	186	120	Н	Mid	GMSK 1MB
2479.712000	89.76	NA	NA	366	122	Н	High	GMSK 1MB
2403.496000	89.74	NA	NA	393	120	Н	Low	GMSK 2MB
2440.438000	91.03	NA	NA	132	345	Н	Mid	GMSK 2MB
2477.552000	86.84	NA	NA	368	122	Н	High	GMSK 2MB
2402.244000	89.83	NA	NA	332	122	Н	Low	GFSK
2440.258000	94.29	NA	NA	390	332	122	Mid	GFSK
2479.716000	89.87	NA	NA	421	125	Н	High	GFSK
7205.536000	41.56	53.98	12.42	401	147	V	Low	GFSK
7319.384000	45.82	53.98	8.16	381	147	V	Mid	GFSK
7438.858000	39.53	53.98	14.45	188	156	V	High	GFSK
7205.372000	44.11	53.98	9.87	135	203	Н	Low	GMSK 1MB
7319.572000	45.26	53.98	8.72	473	149	V	Mid	GMSK 1MB
7438.644000	39.11	53.98	14.87	458	147	V	High	GMSK 1MB
7213.174000	43.39	53.98	10.59	199	201	Н	Low	GMSK 2MB
7321.702000	44.13	53.98	9.85	127	216	Н	Mid	GMSK 2MB
7432.322000	40.16	53.98	13.82	388	210	V	High	GMSK 2MB

The EUT was maximized in all 3 orthogonal axes. The worst-case is shown in the table above.

All other measurements were found to be at least 6 dB Below the limit.



 Report Number:
 R20220615-20-E4A
 Rev
 0

Prepared for: | Garmin International, Inc.

4.5 CONDUCTED SPURIOUS EMISSIONS

Test Method: ANSI C63.10-2013, Section 6.7

Limits of spurious emissions:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Test procedures:

The highest emissions level was measured and recorded. All spurious measurements were evaluated to 30dB below the fundamental. More details can be found in section 3.4 of this report.

Deviations from test standard:

None.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Note that the limit shown on the plots does not apply. It is a line for reference

Page 22 of 87



Prepared for: | Garmin International, Inc.

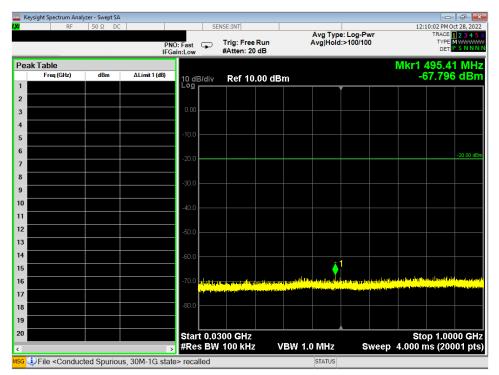


Figure 8 - Radiated Emissions Plot, GFSK, 30MHz - 1GHz, Mid

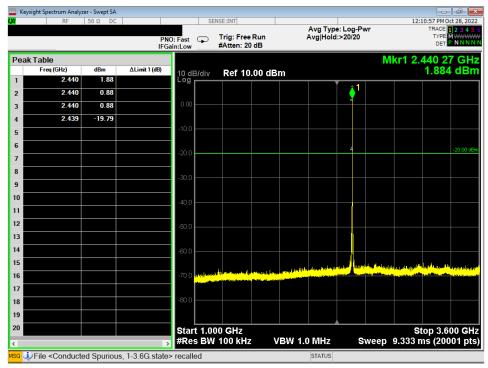


Figure 9 - Radiated Emissions Plot, GFSK, 1GHz - 3.6GHz, Mid

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 23 of 87



Prepared for: | Garmin International, Inc.

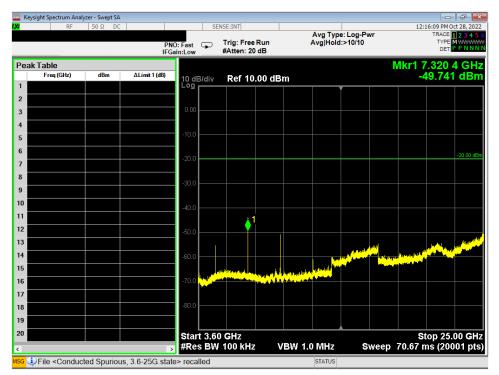


Figure 10 - Radiated Emissions Plot, GFSK, 3.6GHz - 25GHz, Mid

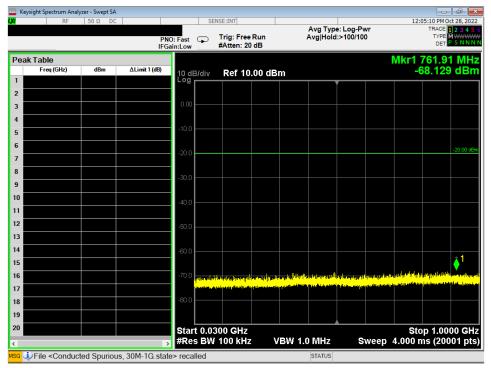


Figure 11 - Radiated Emissions Plot, GMSK 1MB, 30MHz - 1GHz, Mid

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 24 of 87



Prepared for: | Garmin International, Inc.

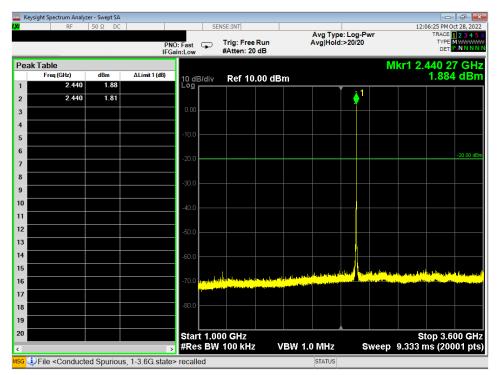


Figure 12 - Radiated Emissions Plot, GMSK 1MB, 1GHz - 3.6GHz, Mid

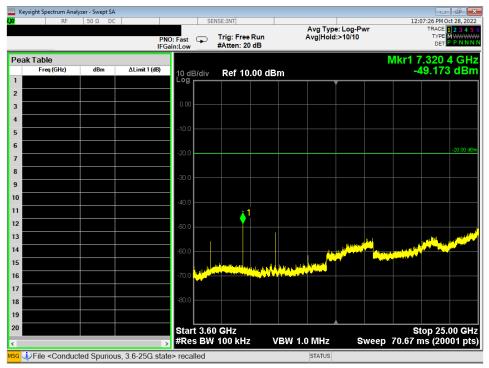


Figure 13 - Radiated Emissions Plot, GMSK 1MB, 3.6GHz - 25GHz, Mid

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 25 of 87



Prepared for: | Garmin International, Inc.

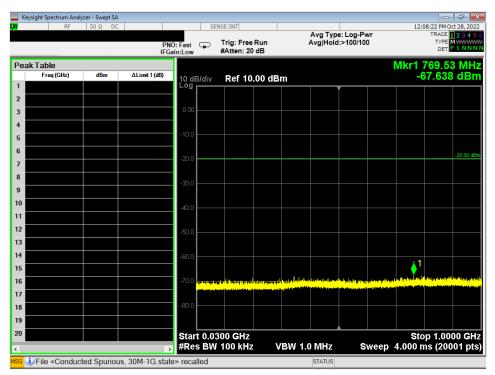


Figure 14 - Radiated Emissions Plot, GMSK 2MB, 30MHz - 1GHz, Mid

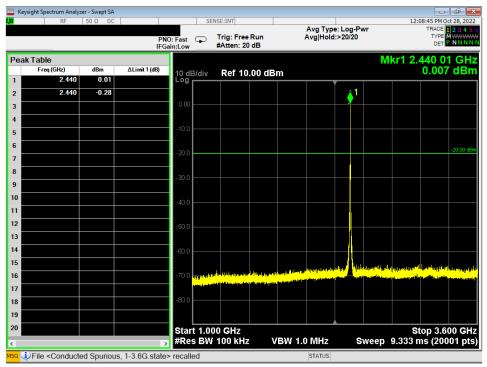


Figure 15 - Radiated Emissions Plot, GMSK 2MB, 1GHz - 3.6GHz, Mid

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 26 of 87



 Report Number:
 R20220615-20-E4A
 Rev
 0

Prepared for: | Garmin International, Inc.

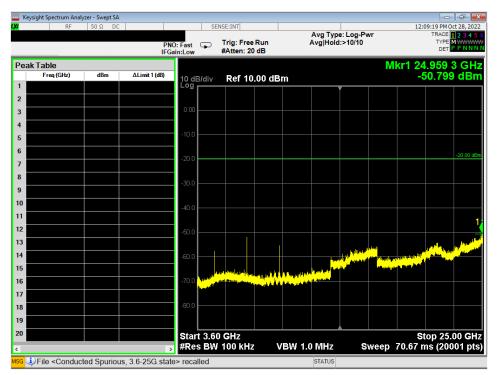


Figure 16 - Radiated Emissions Plot, GMSK 2MB, 3.6GHz - 25GHz, Mid

Page 27 of 87



Prepared for: | Garmin International, Inc.

4.6 BAND EDGES

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of band-edge measurements:

For FCC Part 15.247 Device:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.205(c))

Test procedures:

The highest emissions level beyond the band-edge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209. More details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Page 28 of 87



 Report Number:
 R20220615-20-E4A
 Rev
 0

 Prepared for:
 Garmin International, Inc.

Test results:

Pass

Comments:

- 1. All the band edge plots can be found in the Appendix C.
- 2. If the device falls under FCC Part 15.247 (Details can be found in summary of test results), compliance is shown in the unrestricted band edges by showing minimum delta of 20 dB between peak and the band edge.
- 3. The restricted band edge compliance is shown by comparing to the general limit defined in Part 15.209.
- 4. Tabulated data is listed in section 4.0.



Report Number:	R20220615-20-E4A	Rev	0
Prepared for:	Garmin International Inc		

4.7 POWER SPECTRAL DENSITY

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of power measurements:

For FCC Part 15.247 Device:

The maximum PSD allowed is 8 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

- 1. All the Power Spectral Density (PSD) plots can be found in the Appendix C.
- 2. All the measurements were found to be compliant.
- 3. Tabulated data is listed in section 4.0.

Page 30 of 87



Report Number:	R20220615-20-E4A	Rev	0
Propared for:	Garmin International Inc		

4.8 CONDUCTED AC MAINS EMISSIONS

Test Method: ANSI C63.10-2013, Section(s) 6.2

Limits for conducted emissions measurements:

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Notes:

- 1. The lower limit shall apply at the transition frequencies.
- 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz
- 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Test Procedures:

- a. The EUT was placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits are not reported.
- d. Results were compared to the 15.207 limits.

Deviation from the test standard:

No deviation

EUT operating conditions:

Details can be found in section 2.1 of this report.

Page 31 of 87



Prepared for: | Garmin International, Inc.

Test Results:

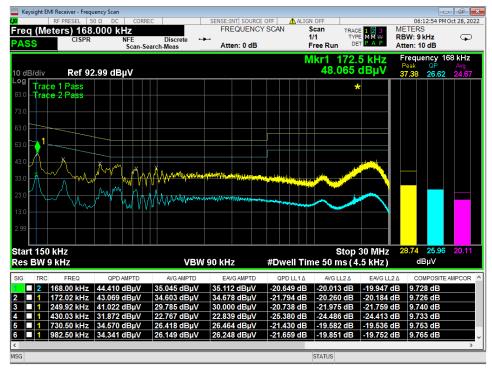


Figure 17 - Conducted Emissions Plot, Line, TX

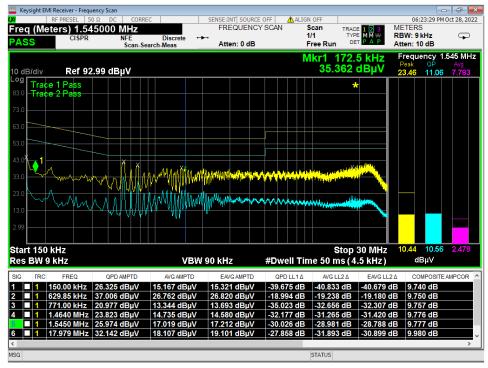


Figure 18 - Conducted Emissions Plot, Neutral, TX

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 32 of 87



Prepared for: | Garmin International, Inc.

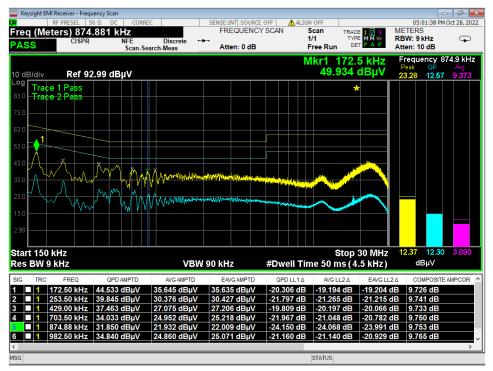


Figure 19 - Conducted Emissions Plot, Line, IDLE

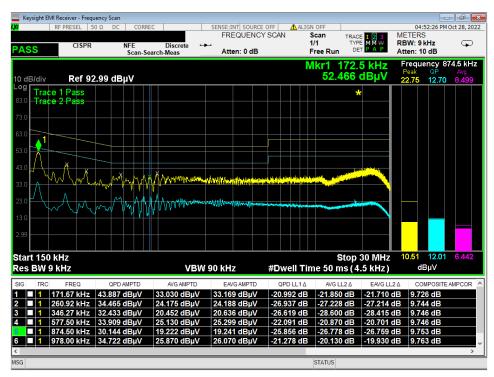


Figure 20 - Conducted Emissions Plot, Neutral, IDLE

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 33 of 87



Prepared for: Garmin International, Inc.

4.9 ANTENNA GAIN

Test procedures:

Device's conducted power was measured then then same measurement was repeated on a radiated sample at 3m test distance and converted to E.I.R.P.

Test setup:

Details can be found in section 2.1 of this report.

EUT operating conditions:

Details can be found in section 2.1 and 2.2 of this report.

Test results:

Antenna Gain:

Radiated Average power – Conducted Average Power = Antenna gain 12.24 dBm – 15.53 dBm = **-3.29 dBi**

Comments:

- 1. Data was used from a different transmitter that utilizes the same antenna and same frequency band
- 2. Since antenna gain was negative, conducted values were compared to the limit as if 0dBm gain for worst case

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 34 of 87



Prepared for: | Garmin International, Inc.

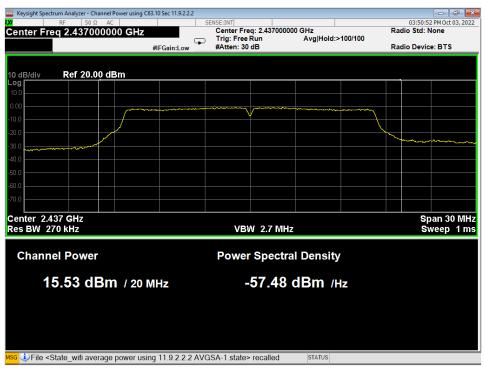


Figure 21 – Conducted Average Power Measurement, 802.11g 6MB

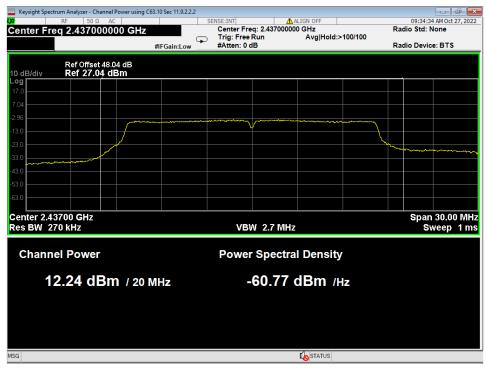


Figure 22 – Radiated Average Power Measurement, 802.11g 6MB
Reference offset includes EIRP conversion and corrections

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 35 of 87



Report Number:	R20220615-20-E4A	Rev	0

Prepared for: Garmin International, Inc.

APPENDIX A: SAMPLE CALCULATION

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 dB\mu V/m$$

The 48.1 dB_μV/m value can be mathematically converted to its corresponding level in μV/m.

Level in μ V/m = Common Antilogarithm [(48.1 dB μ V/m)/20]= 254.1 μ V/m

AV is calculated by the taking the $20*log(T_{on}/100)$ where T_{on} is the maximum transmission time in any 100ms window.

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 36 of 87



Report Number:	R20220615-20-E4A	Rev	0
Prepared for:	Garmin International Inc		

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

EIRP (Watts) = [Field Strength (V/m) x antenna distance (m)] 2 / 30

Power (watts) = $10^{Power} (dBm)/10 / 1000$

Voltage $(dB\mu V)$ = Power (dBm) + 107 (for 50 Ω measurement systems)

Field Strength $(V/m) = 10^{field Strength} (dB\mu V/m) / 20] / 10^6$

Gain = 1 (numeric gain for isotropic radiator)

Conversion from 3m field strength to EIRP (d=3):

 $EIRP = [FS(V/m) \times d^2]/30 = FS[0.3]$ for d = 3

 $EIRP(dBm) = FS(dB\mu V/m) - 10(log 10^9) + 10log[0.3] = FS(dB\mu V/m) - 95.23$

10log(10^9) is the conversion from micro to milli

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 37 of 87



Report Number:	R20220615-20-E4A	Rev	0
Prepared for:	Garmin International, Inc.		

APPENDIX B - MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:

Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	±4.31
Radiated Emissions, 3m	1GHz - 18GHz	±5.08
Emissions limits, conducted	30MHz – 18GHz	±3.03

Expanded uncertainty values are calculated to a confidence level of 95%.

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 38 of 87



Report Number:

R20220615-20-E4A


Rev

0

Prepared for:

Garmin International, Inc.

APPENDIX C - GRAPHS AND TABLES

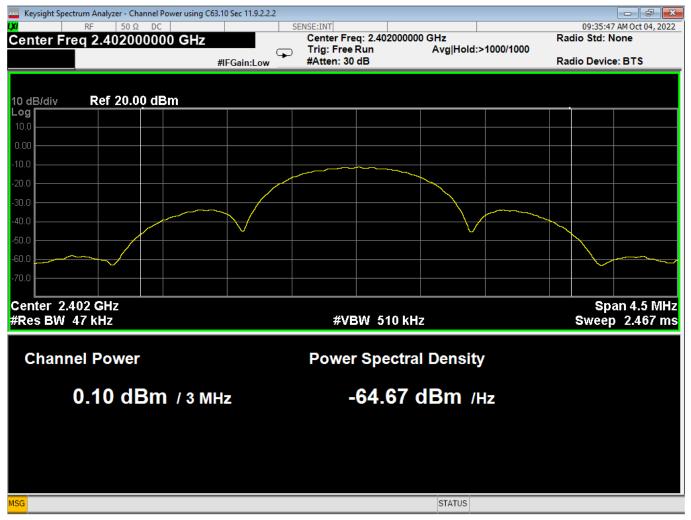

01 Average Power, Low Channel, GFSK


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 39 of 87



Prepared for:

Garmin International, Inc.

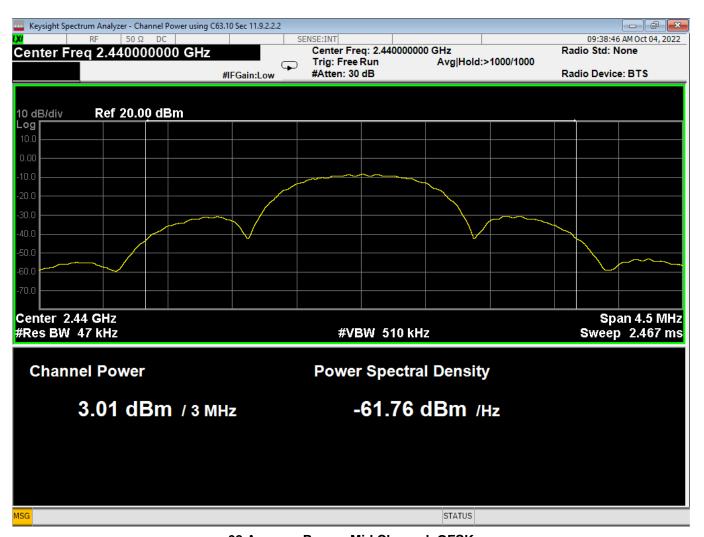

02 Average Power, Mid Channel, GFSK

Page 40 of 87



Prepared for: | Garmin International, Inc.

Keysight Spectrum Analyzer - Channel Power using C63.10 Sec 11.9.2.2.2 09:40:23 AM Oct 04, 2022 Center Freq: 2.480000000 GHz Radio Std: None Center Freq 2.480000000 GHz Trig: Free Run Avg|Hold:>1000/1000 #IFGain:Low #Atten: 30 dB Radio Device: BTS 10 dB/div Log Ref 20.00 dBm Center 2.48 GHz Span 4.5 MHz #Res BW 47 kHz **#VBW 510 kHz** Sweep 2.467 ms **Channel Power Power Spectral Density** -1.14 dBm / 3 MHz -65.91 dBm /Hz STATUS


03 Average Power, High Channel, GFSK

Page 41 of 87



Prepared for: 0

Garmin International, Inc.

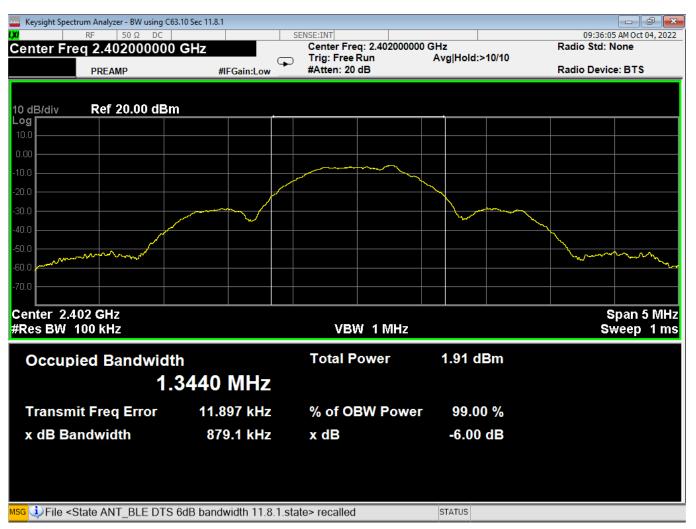

04 6dB Bandwidth, Low Channel, GFSK

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 42 of 87



Prepared for:

Garmin International, Inc.



05 6dB Bandwidth, Mid Channel, GFSK

Page 43 of 87



Prepared for:

Garmin International, Inc.




06 6dB Bandwidth, High Channel, GFSK

Page 44 of 87



Prepared for: | Garmin International, Inc.

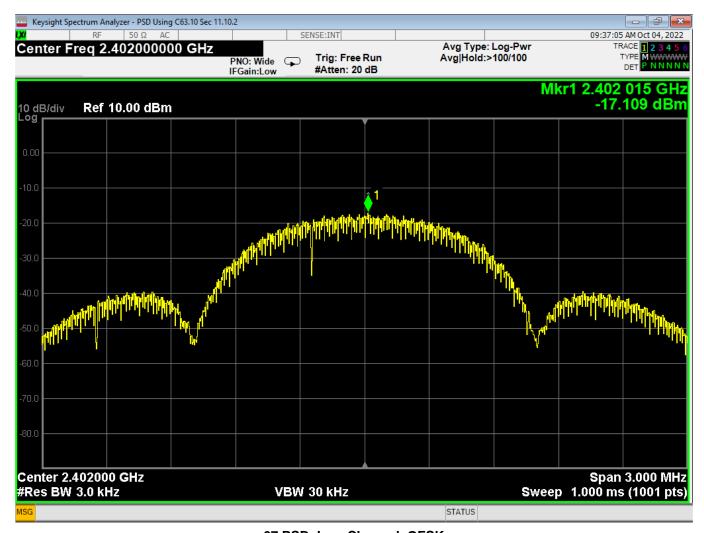

07 PSD, Low Channel, GFSK


Page 45 of 87



0

Prepared for: | Garmin I

Garmin International, Inc.

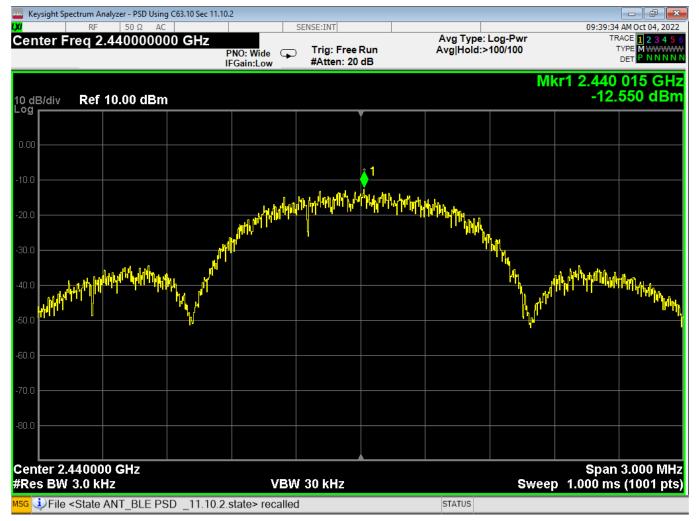

08 PSD, Mid Channel, GFSK


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 46 of 87



Prepared for: G

Garmin International, Inc.

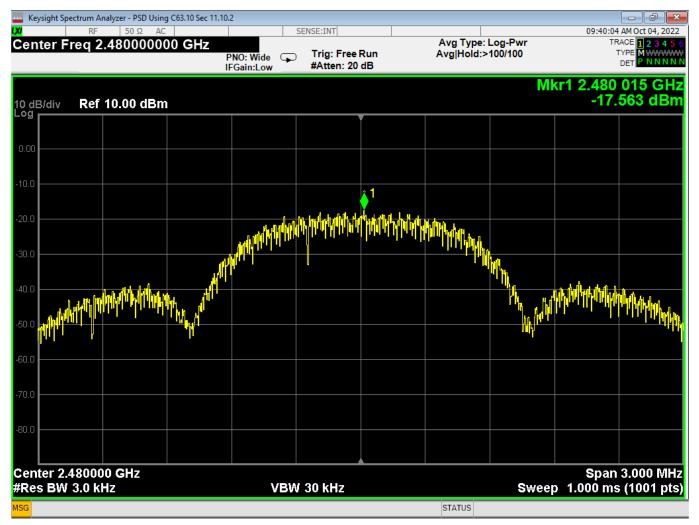


09 PSD, High Channel, GFSK

Page 47 of 87



Prepared for:

Garmin International, Inc.

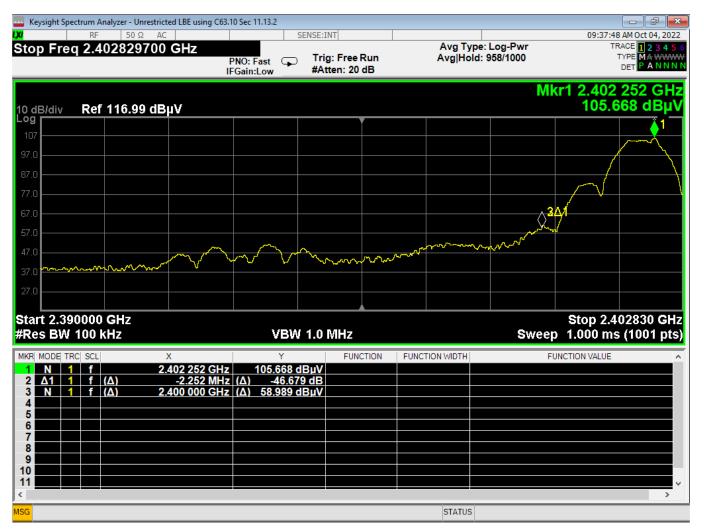

10 Lower Bandedge, Unrestricted, GFSK


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 48 of 87



Prepared for: | Garmin In

Garmin International, Inc.

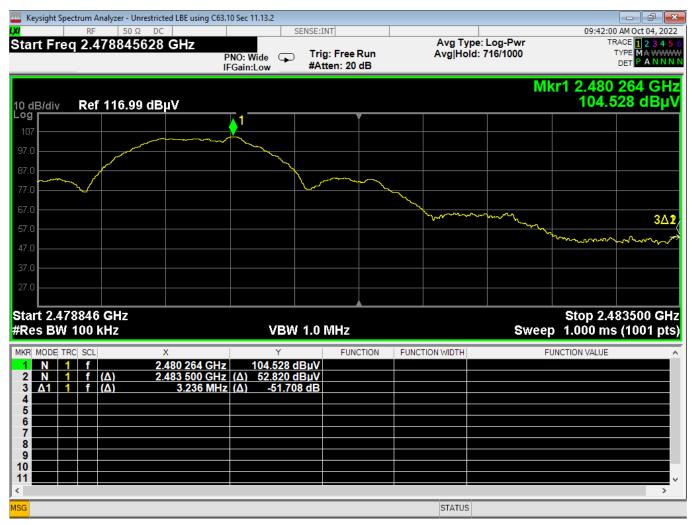

11 Higher Bandedge, Unrestricted, GFSK


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 49 of 87



Prepared for: | Garmin

Garmin International, Inc.

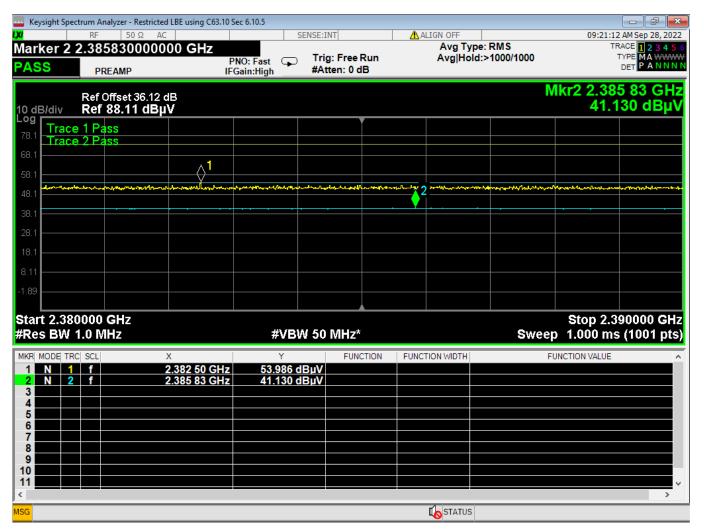

12 Lower Bandedge, Restricted, GFSK


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 50 of 87



Prepared for: Garmin

Garmin International, Inc.

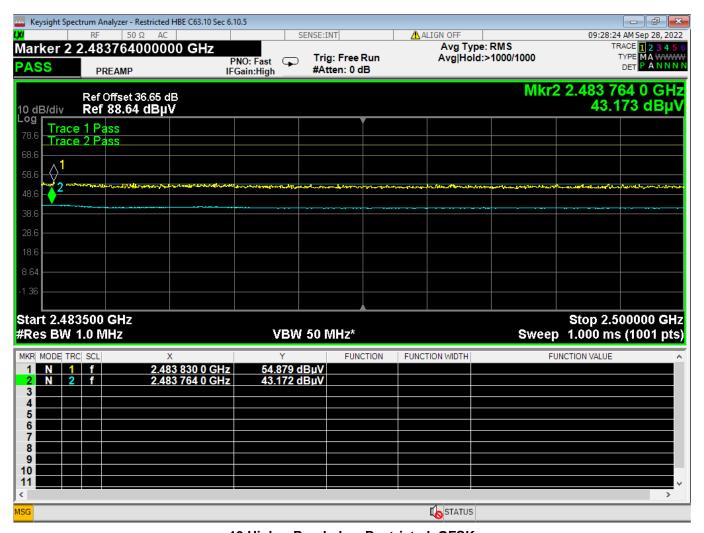

13 Higher Bandedge, Restricted, GFSK


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 51 of 87



Prepared for: G

Garmin International, Inc.

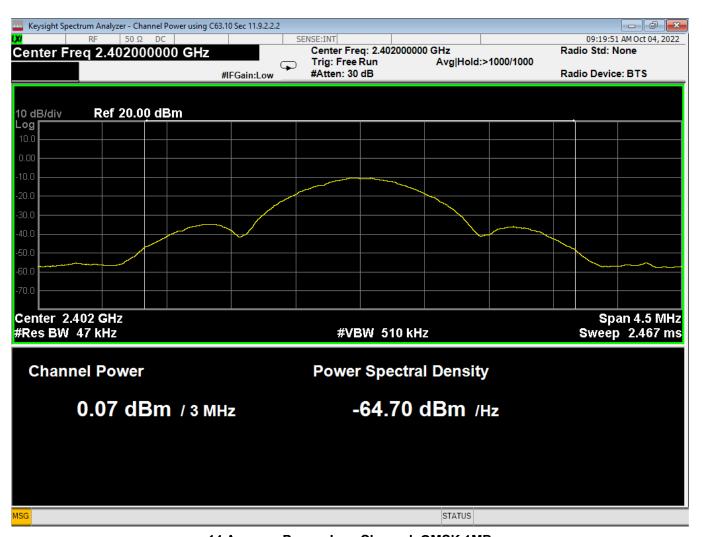

14 Average Power, Low Channel, GMSK 1MB


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 52 of 87



Prepared for:

Garmin International, Inc.

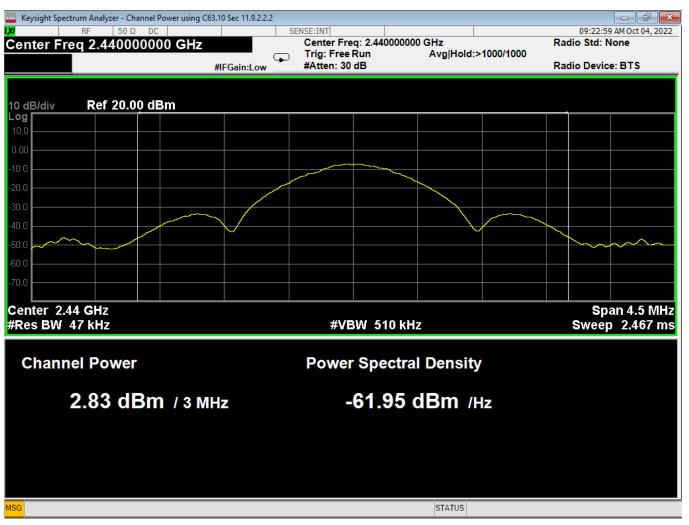


15 Average Power, Mid Channel, GMSK 1MB

Page 53 of 87



Prepared for:

Garmin International, Inc.

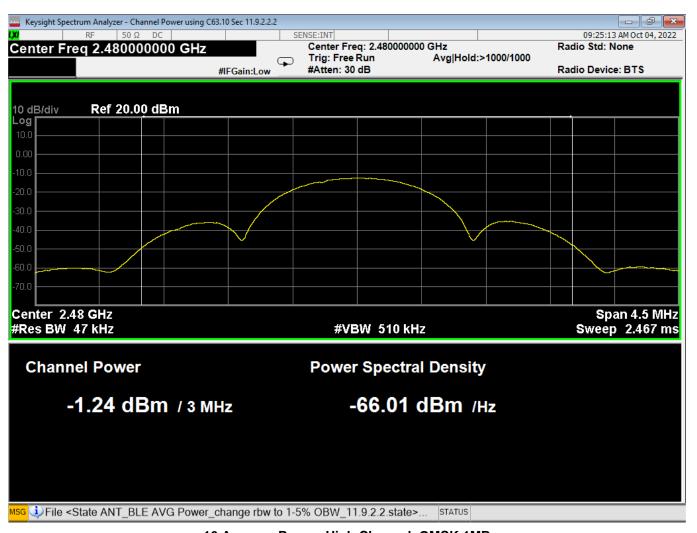

16 Average Power, High Channel, GMSK 1MB


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 54 of 87



Prepared for:

Garmin International, Inc.

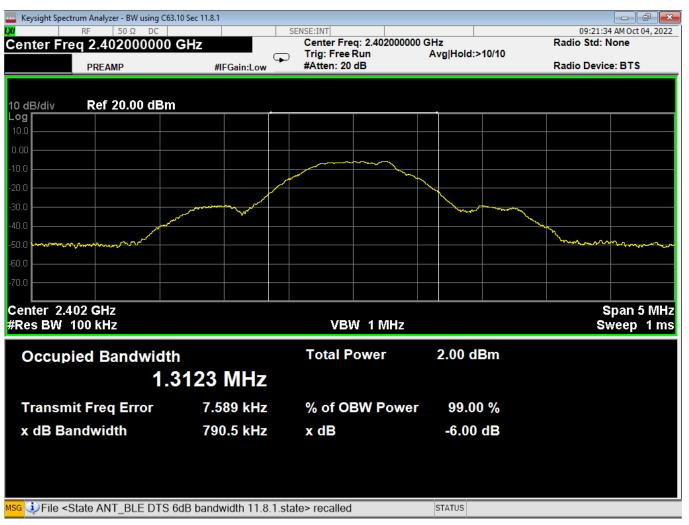

17 6dB Bandwidth, Low Channel, GMSK 1MB


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 55 of 87



Prepared for:

Garmin International, Inc.

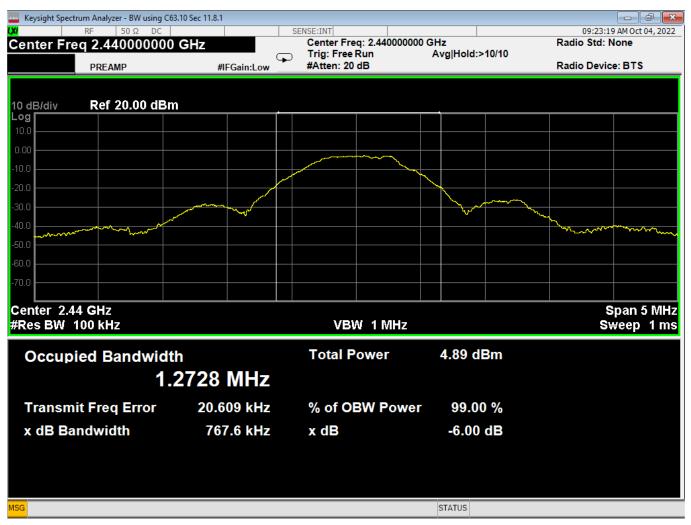


18 6dB Bandwidth, Mid Channel, GMSK 1MB

Page 56 of 87



Prepared for:

Garmin International, Inc.

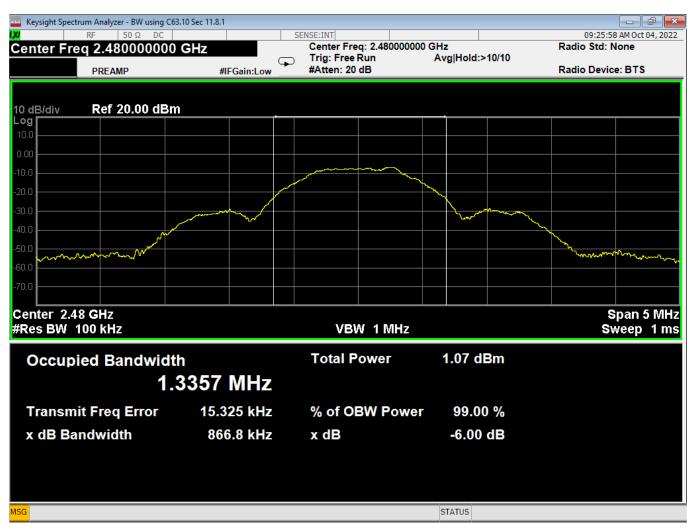


19 6dB Bandwidth, High Channel, GMSK 1MB

Page 57 of 87



Prepared for: Garmin International, Inc.

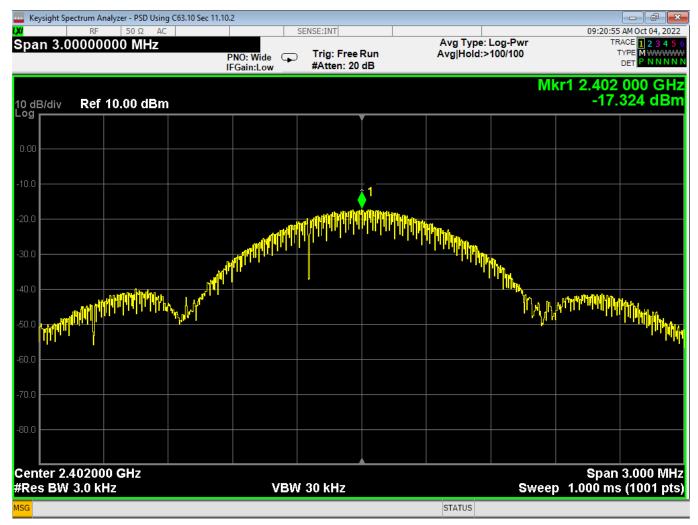


20 PSD, Low Channel, GMSK 1MB

Page 58 of 87



Prepared for: | Ga

Garmin International, Inc.

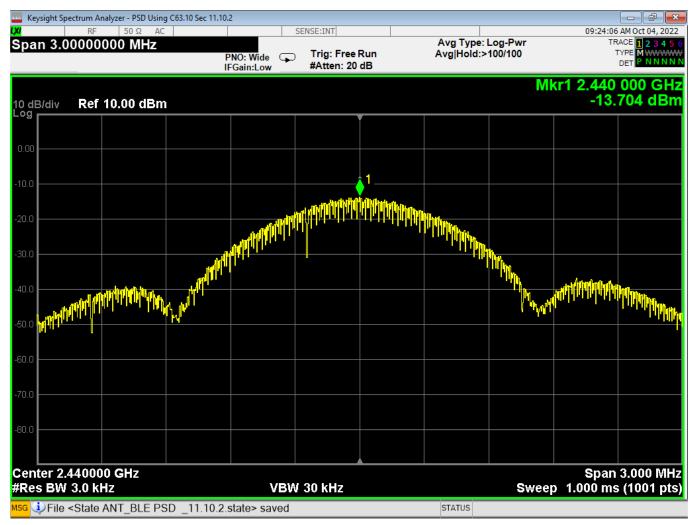


21 PSD, Mid Channel, GMSK 1MB

Page 59 of 87



Prepared for: | Garmin International, Inc.

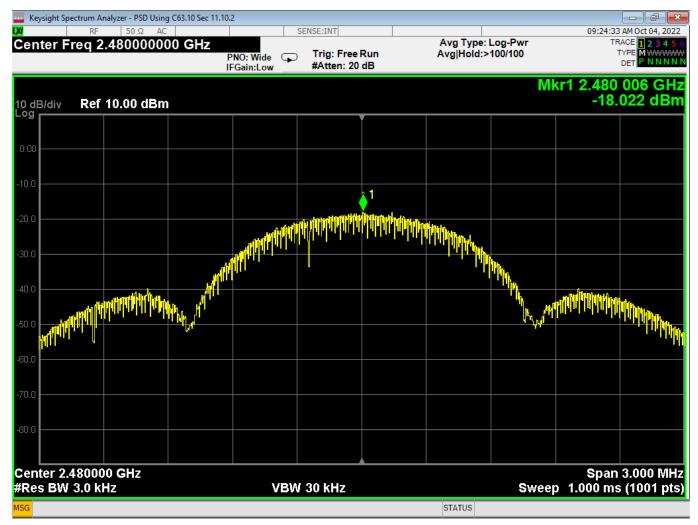

22 PSD, High Channel, GMSK 1MB

Page 60 of 87



Prepared for: 0

Garmin International, Inc.



23 LBE, unrestricted GMSK 1MB

Page 61 of 87



Prepared for: | Ga

Garmin International, Inc.




24 HBE, unrestricted GMSK 1MB

Page 62 of 87



Prepared for: | G

Garmin International, Inc.

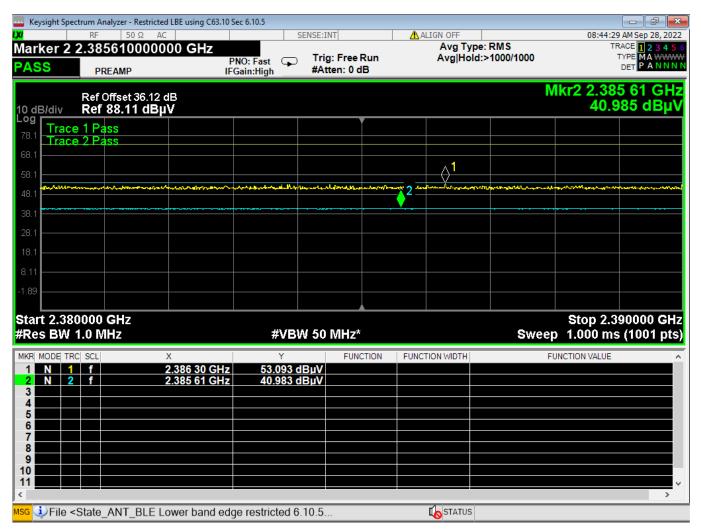

25 LBE, Restricted GMSK 1MB


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 63 of 87



Prepared for: Garmi

Garmin International, Inc.

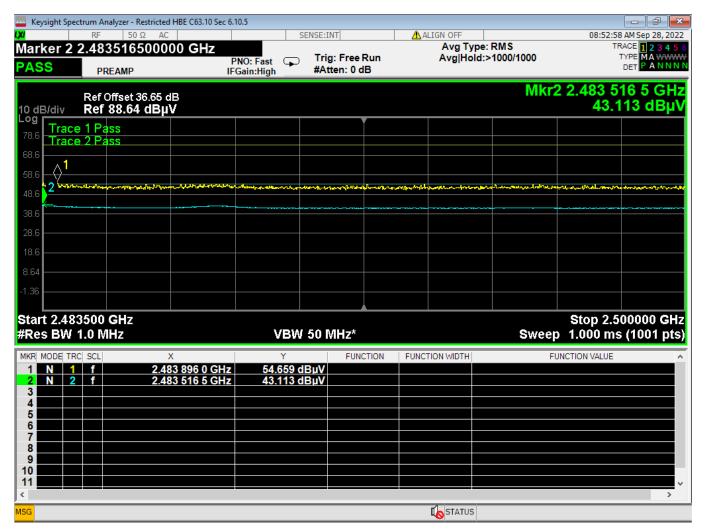

26 HBE, Restricted GMSK 1MB


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 64 of 87



Prepared for: | G

Garmin International, Inc.

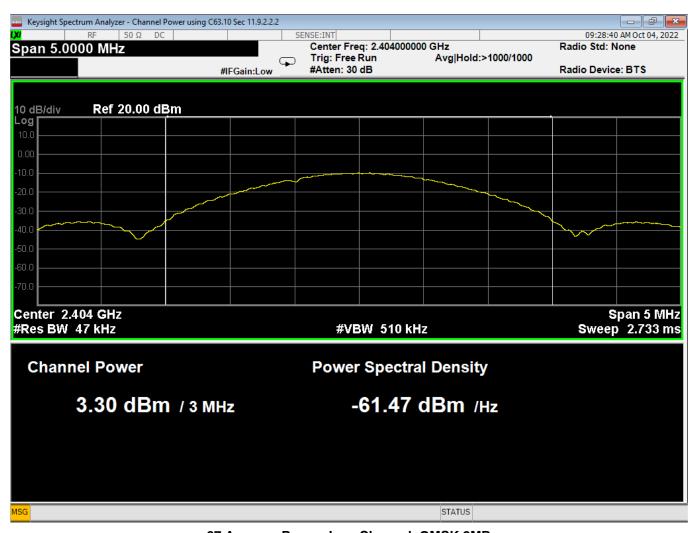

27 Average Power, Low Channel, GMSK 2MB


Page 65 of 87



0

Prepared for: Garmin In

Garmin International, Inc.

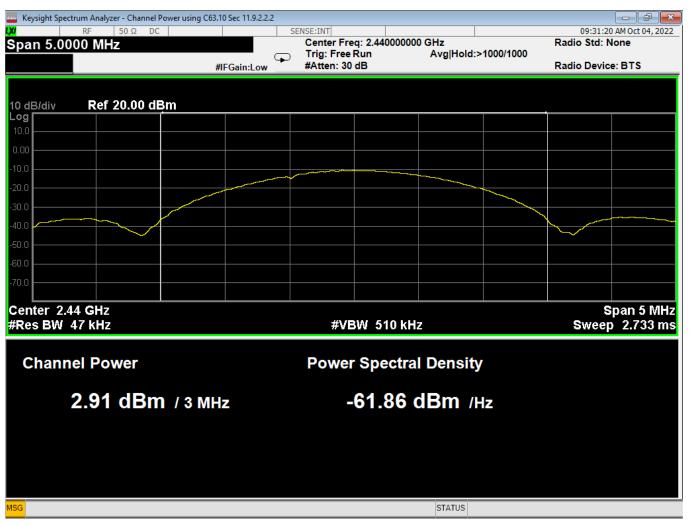


28 Average Power, Mid Channel, GMSK 2MB

Page 66 of 87



Prepared for: | Garm

Garmin International, Inc.

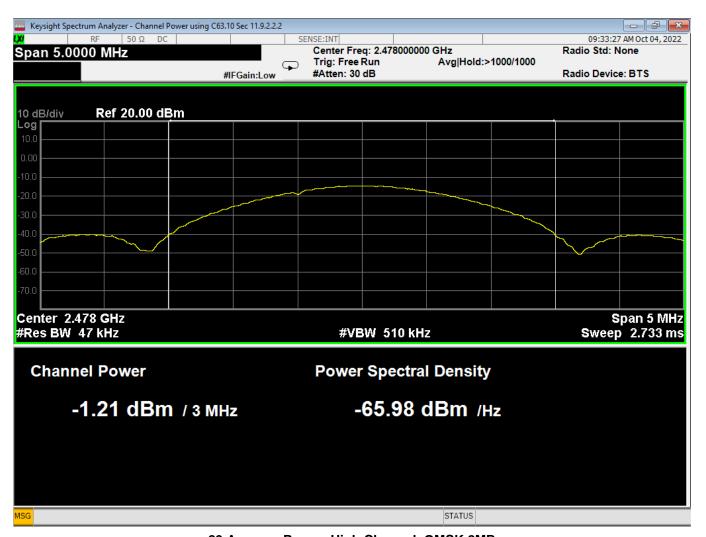


29 Average Power, High Channel, GMSK 2MB

Page 67 of 87



Prepared for:

Garmin International, Inc.

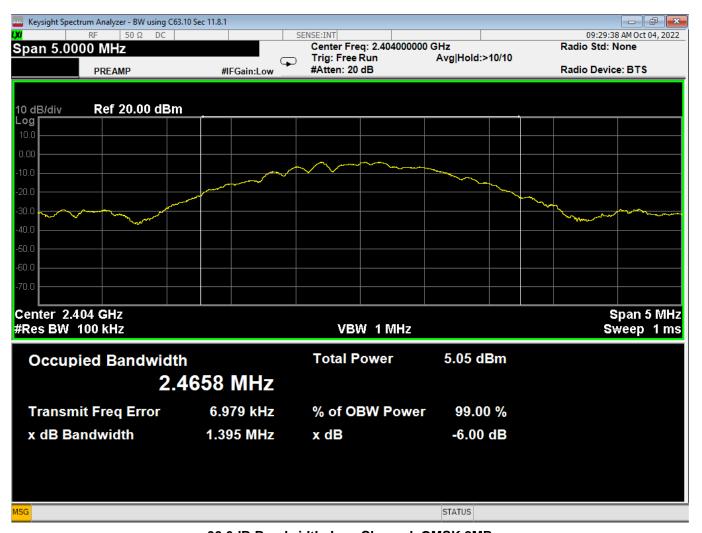

30 6dB Bandwidth, Low Channel, GMSK 2MB

Page 68 of 87



Prepared for: | Garmin International, Inc.



31 6dB Bandwidth, Mid Channel, GMSK 2MB


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 69 of 87



Prepared for:

Garmin International, Inc.

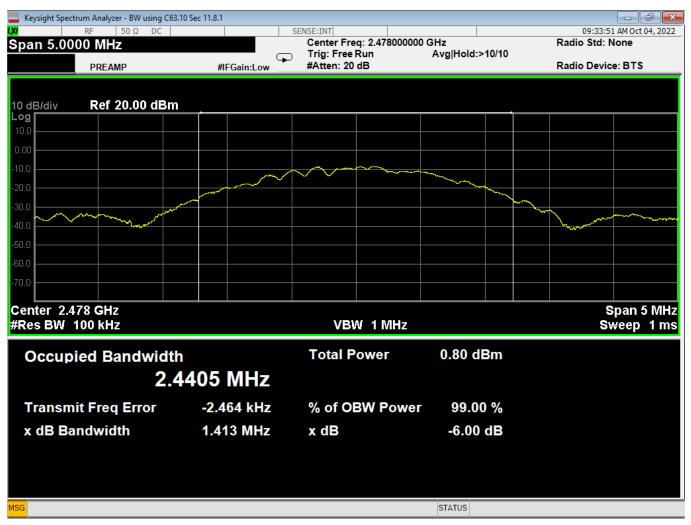


32 6dB Bandwidth, High Channel, GMSK 2MB

Page 70 of 87



Prepared for:

Garmin International, Inc.

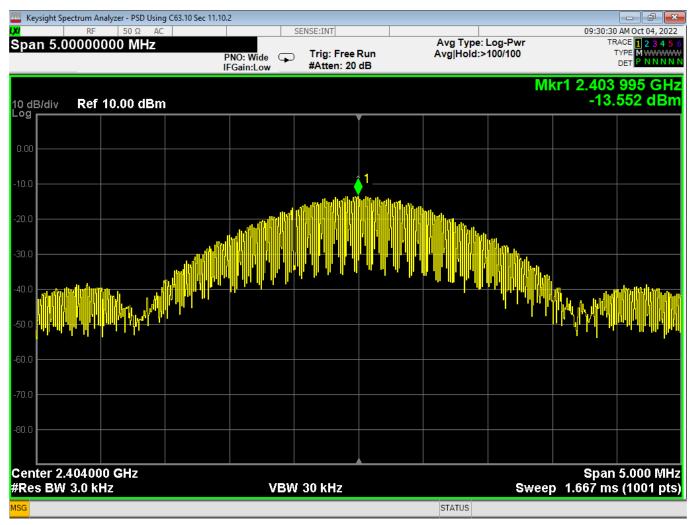


33 PSD, Low Channel, GMSK 2MB

Page 71 of 87



Prepared for: | Garmin International, Inc.

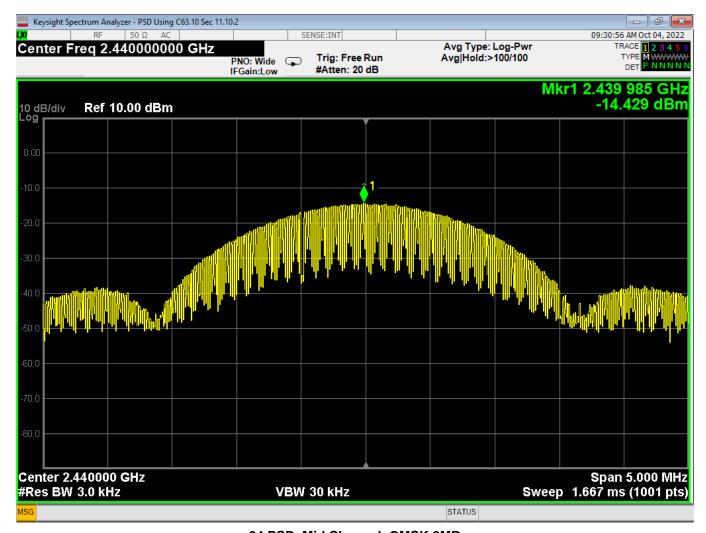


34 PSD, Mid Channel, GMSK 2MB

Page 72 of 87



Prepared for: | Garm

Garmin International, Inc.

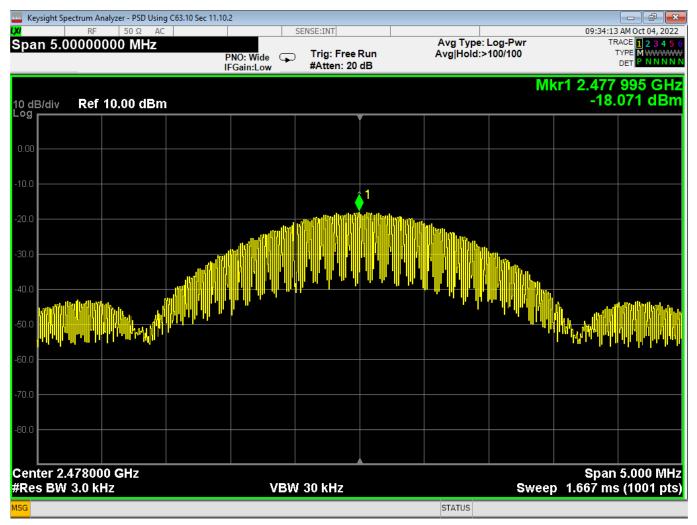


35 PSD, High Channel, GMSK 2MB

Page 73 of 87



Prepared for:

Garmin International, Inc.

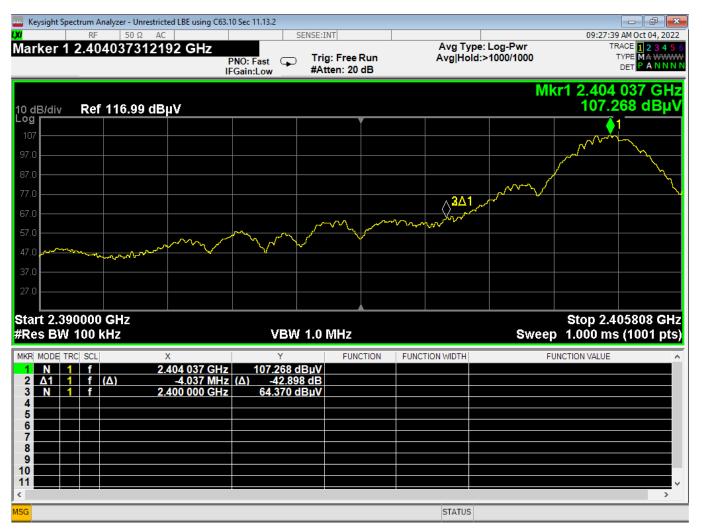

36 Lower Bandedge, Unrestricted, GMSK 2MB

Page 74 of 87



Prepared for:

Garmin International, Inc.



37 Higher Bandedge, Unrestricted, GMSK 2MB


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 75 of 87



Prepared for: | Ga

Garmin International, Inc.

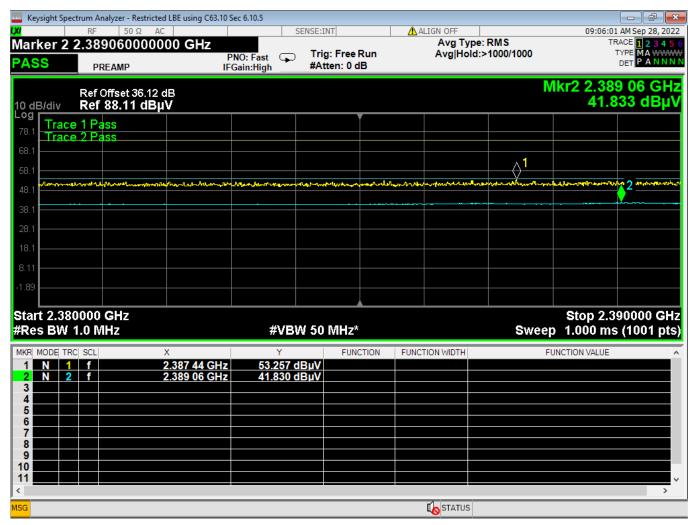

38 Lower Bandedge, Restricted, GMSK 2MB


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 76 of 87



Prepared for: | Ga

Garmin International, Inc.

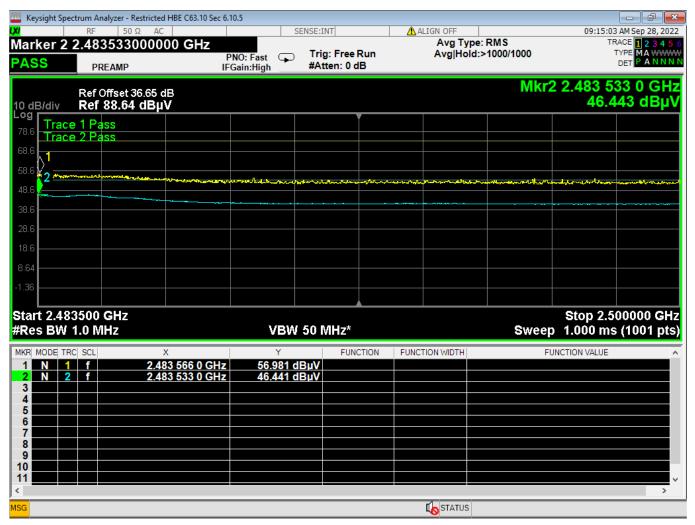

39 Higher Bandedge, Restricted, GMSK 2MB

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 77 of 87



Prepared for:

Garmin International, Inc.



40 Occupied Bandwidth, Low Channel, GFSK

Page 78 of 87



Prepared for:

Garmin International, Inc.



41 Occupied Bandwidth, Mid Channel, GFSK


The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 79 of 87



Prepared for:

Garmin International, Inc.

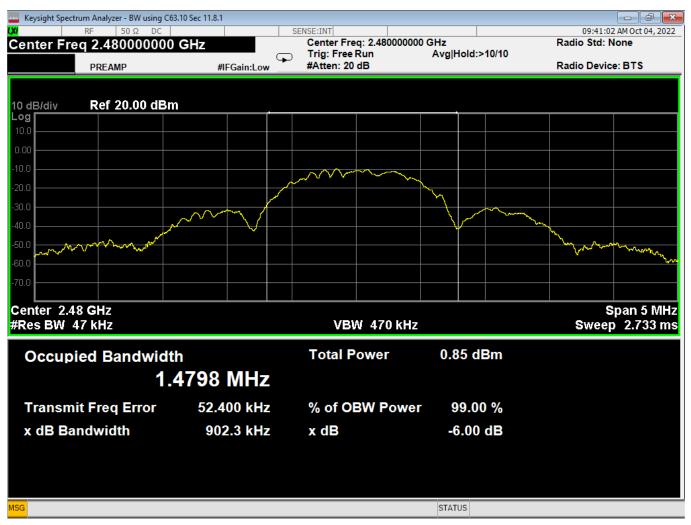

42 Occupied Bandwidth, High Channel, GFSK

Page 80 of 87



0

Prepared for:

File <State ANT_BLE DTS Occupied Bandwidth 11.8.1.state> recalled

Garmin International, Inc.

Keysight Spectrum Analyzer - BW using C63.10 Sec 11.8.1 - F X 09:21:14 AM Oct 04, 2022 Center Freq: 2.402000000 GHz Radio Std: None Center Freq 2.402000000 GHz Trig: Free Run Avg|Hold:>10/10 PREAMP #IFGain:Low #Atten: 20 dB Radio Device: BTS 10 dB/div Ref 20.00 dBm Log Center 2.402 GHz Span 5 MHz #Res BW 47 kHz Sweep 2.733 ms **VBW 470 kHz Total Power** 1.72 dBm **Occupied Bandwidth** 1.3109 MHz **Transmit Freq Error** 4.944 kHz % of OBW Power 99.00 % x dB Bandwidth 718.4 kHz x dB -6.00 dB

43 Occupied Bandwidth, Low Channel, GMSK 1MB

STATUS

Page 81 of 87



0

Prepared for:

Garmin International, Inc.



44 Occupied Bandwidth, Mid Channel, GMSK 1MB

Page 82 of 87



Prepared for:

Garmin International, Inc.



45 Occupied Bandwidth, High Channel, GMSK 1MB

Page 83 of 87



Prepared for:

Garmin International, Inc.



46 Occupied Bandwidth, Low Channel, GMSK 2MB

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 84 of 87



Prepared for:

Garmin International, Inc.




47 Occupied Bandwidth, Mid Channel, GMSK 2MB

Page 85 of 87



Prepared for:

Garmin International, Inc.

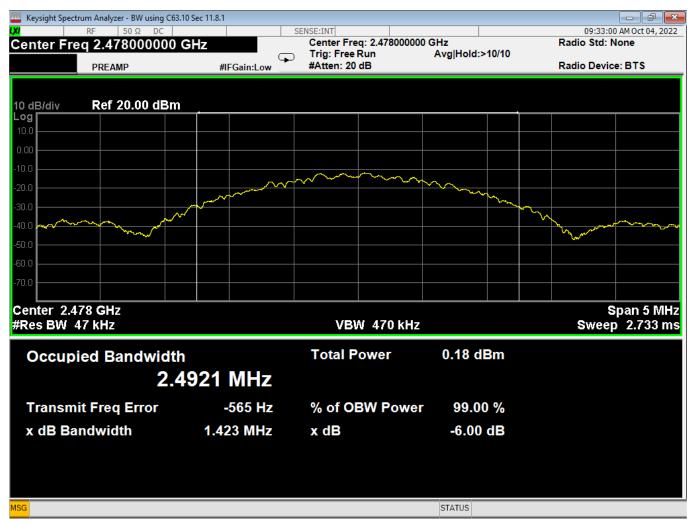

48 Occupied Bandwidth, High Channel, GMSK 2MB

Page 86 of 87



 Report Number:
 R20220615-20-E4A
 Rev
 0

 Prepared for:
 Garmin International, Inc.

REPORT END

The Nebraska Center for Excellence in Electronics 4740 Discovery Drive Lincoln, NE 68521

Page 87 of 87