



Nemko

Test Report: 2W06678

Applicant: Instantel Inc.
309 Legget Drive
Kanata, Ontario K2K 3A3

**Equipment Under Test:
(EUT)** 806A2201, Mother Tag
125KHz Low Power Transmitter

In Accordance With: **FCC Part 15, Subpart C, 15.209**

FCC I.D. : **ISEKTG**

Tested By: Nemko Canada Inc.
303 River Road, R.R. 5
Ottawa, Ontario K1V 1H2

Authorized By: 
Kevin Carr, EMC Specialist

Date: 12 November 2002

Total Number of Pages: 11

Table Of Contents

Section 1. Summary Of Test Results.....3

Section 2. General Equipment Specification5

Section 3. Radiated Emissions.....7

Section 4. Block Diagrams..... 10

Section 5. Test Equipment List 11

EQUIPMENT: 806A2201 Mother Tag

Section 1. Summary Of Test Results

General

All measurements are traceable to national standards.

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 15, Subpart C for low power devices. All tests were conducted using measurement procedure ANSI C63.4-1992. Radiated Emissions were made on an open area test site. A description of the test facility is on file with the FCC.

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE
TEST SPECIFICATIONS HAVE BEEN MADE.

See " Summary of Test Data".



TESTED BY: _____
Glen Westwell, Wireless Technologist

DATE: 11 November 2002

Nemko Canada Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

This report applies only to the items tested.

EQUIPMENT: 806A2201 Mother Tag

Summary Of Test Data

Name Of Test	Para. No.	Result
Powerline Conducted Emissions	15.207	N/A
Radiated Emissions	15.209	Complies

Footnotes For N/A's:

- This device is powered by a 3 Vdc Lithium cell.
- This device has been previously certified under FCC ID ISEMTG (Ref. Nemko test report 2W04940) The original test data has been included for completeness.
- This application for a new FCC ID is based on original test results. No performance changes have been incorporated from the original application. The frequency of operation has been changed from a fixed frequency of 125KHz to a range from 117-129KHz. See Customer statement of change below.
- The power consumption from the battery is optimised for battery longevity by operating the three separate antenna windings slightly off each of their resonant points. The tag firmware has been designed with the capability of transmitting on slightly different frequencies, determined during the production testing of the tag. Each optimised frequency is stored in non-volatile memory. This means that the tag transmits on up to three distinct frequencies as the firmware sequences through the three antennas in time. The frequency range will be 117 kHz to 129 kHz. There is also an LED (for low-battery indication) and a phototransistor (to keep the product inactive during shipping).

Test Conditions:

Indoor Temperature: 24 °C
 Humidity: 38 %


Outdoor Temperature: 15 °C
 Humidity: 44 %

EQUIPMENT: 806A2201 Mother Tag

Section 2. General Equipment Specification

Manufacturer:	Instantel Inc.
Model No.:	806A2201
Serial No.:	None
Date Received In Laboratory:	7 May 2002
Nemko Identification No.:	#1
Frequency:	117-129 kHz
Modulation:	Pulse Modulated (on/off keying)
Emission Designator:	32K3POD

EQUIPMENT: 806A2201 Mother Tag

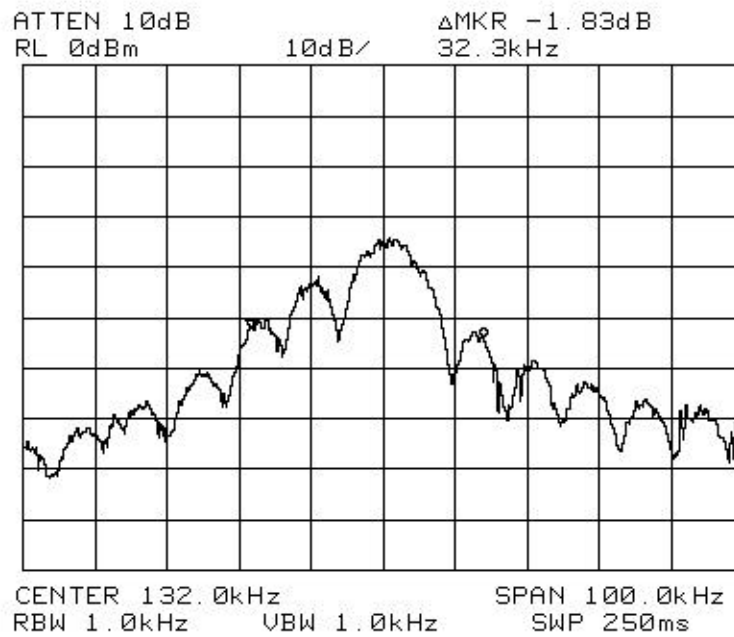

EQUIPMENT: 806A2201 Mother Tag

Section 3. Radiated Emissions**Para. No.: 15.209**

Test Performed By: Glen Westwell	Date of Test: 13 May 2002
---	----------------------------------

Minimum Standard:

Fundamental (MHz)	Field Strength (μV/m)	Field Strength (dBμV)
0.009 - 0.490	2400/F(kHz) @ 300m	—
0.490 - 1.705	24000/F(kHz) @ 30m	—
1.705 - 30	30 @ 30m	—
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

Test Results: Complies.**Measurement Data:** See attached table.

EQUIPMENT: 806A2201 Mother Tag

Test Data - Radiated Emissions

Frequency of Emission (MHz)	Received Signal (dBuV/m@0.1m)	Received Signal (dBuV/m@1m)	Extrapolated Signal (dBuV/m@300m)	Limit (dBuV/m@300m)	Margin (dB)
0.125	--	45.3	-53.7	25.6	79.4
0.250	35.0	N.D.	-104.1	19.6	123.7
0.375	29.0	N.D.	-110.1	16.1	126.2
0.500	28.7	N.D.	-110.4	33.6	143.9
0.625	30.0	N.D.	-109.1	31.7	140.4

Notes:

Field strength emissions were measured at 0.1m and 1m due to the very low power of the device.

All emissions measured were extrapolated using 40 dB/decade extrapolation factor.

N.D. = Not Detected.

All harmonic and spurious emissions were searched up to the 10th harmonic.


EQUIPMENT: 806A2201 Mother Tag

Radiated Emissions- Photographs




Section 4. Block Diagrams

Radiated Prescan

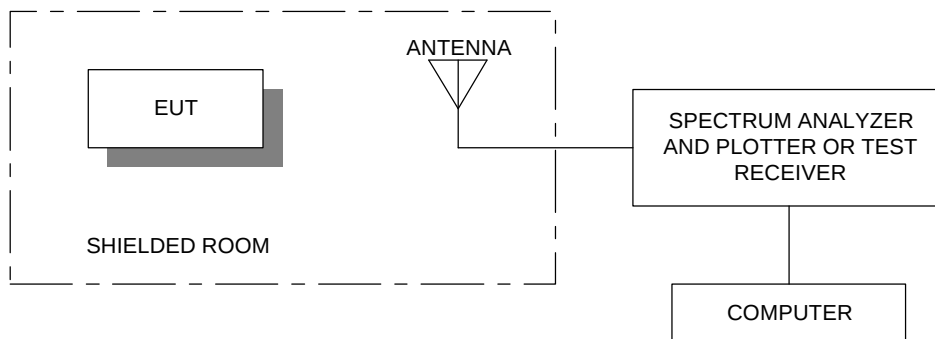

Test Site For Radiated Emissions

Measurement distance at 1m, fundamental and 0.1m harmonics, due to the very low power of this device.

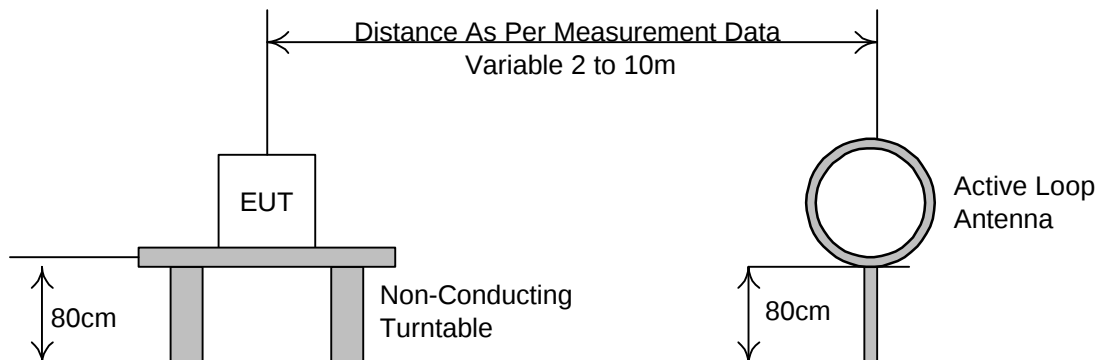

EQUIPMENT: 806A2201 Mother Tag

Section 5. Test Equipment List

CAL CYCLE	EQUIPMENT	MANUFACTURER	MODEL	SERIAL	LAST CAL.	NEXT CAL.
1 Year	Spectrum Analyzer	Hewlett Packard	8564E	FA001367	Mar 6/02	Mar 6/03
1 Year	Receiver	Rohde & Schwarz	ESH3	892473/002	Oct 18/01	Oct 18/02
1 Year	Active Loop Antenna	Rohde & Schwarz	HFH2-Z2	FA000631	May 12/02	May 12/03

NA: Not Applicable

NCR: No Cal Required

COU: CAL On Use