

ROGERS LABS, INC.

4405 West 259th Terrace
Louisburg, KS 66053
Phone / Fax (913) 837-3214

TEST REPORT For APPLICATION of CERTIFICATION

For

KUSTOM SIGNALS, INC.
9325 Pflumm
Lenexa, KS 66215-3347

John Kusek,
President

MODEL: DRU
Traffic Monitor
Frequency 24.125 GHz
FCC ID: IVQDRU

Test Date: January 26, 2000

Certification Date: January 26, 2000

Certifying Engineer: *Scot D Rogers*

Scot D. Rogers
ROGERS LABS, INC.
4405 West 259th Terrace
Louisburg, KS 66053
Phone: (913) 837-3214
FAX: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

TABLE OF CONTENTS

FORWARD:	3
1) APPLICABLE STANDARDS & TEST PROCEDURES	3
2.1033(b).....	Application for Certification
4	
2) EQUIPMENT TESTED	5
3) EQUIPMENT FUNCTION AND TESTING PROCEDURES	5
4) EQUIPMENT AND CABLE CONFIGURATIONS	6
Conducted Emission Test Procedure	6
Radiated Emission Test Procedure	6
5) LIST OF TEST EQUIPMENT	7
6) UNITS OF MEASUREMENTS	8
7) TEST SITE LOCATIONS	8
8) SUBPART B – UNINTENTIONAL RADIATORS	8
Conducted EMI.....	8
Radiated EMI.....	11
Data: Conducted (7 Highest Emissions):	15
Data: EUT and System Radiated Emissions (9 Highest) :	16
Data: Support Equipment Radiated Emissions (6 Highest) :	16
Summary of Results for Conducted Emissions:	16
Summary of Results for Radiated Emissions:	17
Statement of Modifications:.....	17
9) SUBPART C - INTENTIONAL RADIATORS	17
15.203 Antenna Requirements	17
Restricted Bands of Operation Per 15.205.....	17
Data 15.205:.....	18
15.209 Radiated Emissions Limits; General Requirements.....	19
Radiated EMI.....	19
Data 15.209:.....	20
Summary of Results for Radiated Emissions:	20
15.245 Operation in the Band 24.00-24.25 GHz.....	21
Radiated Emissions of Intentional Radiator:.....	26
Statement of Modifications:.....	27

FORWARD:

The following is submitted for consideration in obtaining a Grant of Certification for low power intentional radiators operated under CFR 47, paragraph 15.245.

Name of Applicant:

KUSTOM SIGNALS, INC.
9325 Pflumm
Lenexa, KS 66215-3347

Model: DRU Traffic Monitor

FCC I.D.: IVQDRU

Frequency Range: 24.000 GHz to 24.250 GHz

Operating Power: 250 mV/m @ 3 Meters (107.9 dB μ V/m @ 3 meters)

1) Applicable Standards & Test Procedures

a) In accordance with the Federal Communications Code of Federal Regulations, dated October 1, 1998, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, Part 15C Paragraph 15.245, and FCC Document FCC98-58 the following is submitted:

b) Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in the ANSI 63.4-1992 Document.

ROGERS LABS, INC. Kustom Signals, Inc..
4405 W. 259th Terrace MODEL: DRU Traffic Monitor
Louisburg, KS 66053 Test #: 000126 FCCID#: IVQDRU
Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c

Page 3 of 38
CERTIFICATION\KUSTOMDRU15245 03/07/2000

2.1033(b) Application for Certification

- (1) Manufacturer:
KUSTOM SIGNALS, INC.
9325 Pflumm
Lenexa, KS 66215-3347
- (2) Identification: Model: DRU
FCC I.D.: IVQDRU
- (3) Instruction Book:

Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:

Refer to Exhibit for Circuit Description.
- (5) Block Diagram with Frequencies:

Refer to Exhibit for Block Diagram.
- (6) Report of Measurements:

Follows in this Report.
- (7) Photos: Construction, Component Placement, etc.:

Refer to Appendix of this report for Photographs of equipment.
- (8) Brief description of peripheral equipment used with EUT.

The EUT has provision to interface with any device, which uses the RS232 communications protocol. The support equipment used for testing was a Sharp laptop computer and a Panasonic printer. The communications cable for the EUT was supplied by the manufacturer.
- (9) Transition Provisions of 15.37 are not being requested.
- (10) Direct Sequence Spread Spectrum:
Not Applicable.
- (11) Not Applicable. The EUT is not a Scanning Receiver.

ROGERS LABS, INC. Kustom Signals, Inc..
4405 W. 259th Terrace MODEL: DRU Traffic Monitor
Louisburg, KS 66053 Test #: 000126 FCCID#: IVQDRU
Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c

2) Equipment Tested

<u>EQUIPMENT</u>	<u>MODEL/PART#</u>	<u>FCC I.D.</u>
EUT	DRU	IVQDRU
CPU	Sharp PC9000	FKG PC9000
Printer	KX-P1092	ACJ 96NKX-P1092

3) Equipment Function and Testing Procedures

The EUT is a 24.150 GHz radio transmitter used to monitor automotive traffic as a field disturbance sensor. The EUT was designed for use where vehicle speed is an issue. The unit uses the 24.150 GHz transmitter to measure vehicle speed and relay the information to a monitor via a RS232 communications line. The unit is designed to interface to any device utilizing the RS232 communications protocol. The EUT is operated from a 12-volt battery and has no provision for connection to the utility power system. A laptop computer was used to communicate with the EUT over the RS232 cable. Since the EUT is battery operated, line conducted emissions testing was performed on the laptop computer. A printer was also connected to the laptop through a standard parallel printer cable.

4) Equipment and Cable Configurations

Conducted Emission Test Procedure

The test setup, including the EUT, was arranged in a typical equipment configuration and placed on a 1 x 1.5-meter wooden bench, 0.8 meters high located in a screen room. Since the EUT is battery operated, line conducted emissions testing was performed on the laptop computer which was connected to the EUT through the manufacturer supplied cable. The power lines of the system were isolated from the power source using a standard LISN with a 50- μ Hy choke. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor internal to the LISN. The LISN was positioned on the floor beneath the wooden bench supporting the EUT. The power lines and cables were draped over the back edge of the table.

Radiated Emission Test Procedure

The EUT was placed on a rotatable 1 x 1.5-meter wooden platform, 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. EMI energy was maximized by equipment placement, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken using a spectrum analyzer. Refer to photos in Appendix for EUT placement.

5) List of Test Equipment

A Hewlett Packard 8591EM Spectrum Analyzer was used as the measuring device for the emissions testing of frequencies below 1 GHz. A Hewlett Packard 8562A Spectrum Analyzer was used as the measuring device for testing the emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table. Refer to Appendix for a complete list of Test Equipment.

HP 8591 EM ANALYZER SETTINGS		
CONDUCTED EMISSIONS:		
RBW	AVG. BW	DETECTOR FUNCTION
9 kHz	30 kHz	Peak / Quasi Peak
RADIATED EMISSIONS:		
RBW	AVG. BW	DETECTOR FUNCTION
120 kHz	300 kHz	Peak / Quasi Peak
HP 8562A ANALYZER SETTINGS		
RBW	VIDEO BW	DETECTOR FUNCTION
100 kHz	100 kHz	PEAK
1 MHz	1 MHz	Peak / Average

EQUIPMENT	MFG.	MODEL	CAL. DATES	DUE.
LISN	Comp. Design	1762	9/99	9/00
Antenna	ARA	BCD-235-B	9/99	9/00
Antenna	EMCO	3147	9/99	9/00
Antenna	EMCO	3143	4/99	4/00
Analyzer	HP	8591EM	7/99	7/00

ROGERS LABS, INC. Kustom Signals, Inc..
 4405 W. 259th Terrace MODEL: DRU Traffic Monitor
 Louisburg, KS 66053 Test #: 000126 FCCID#: IVQDRU
 Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c

6) Units of Measurements

Conducted EMI: Data is in dB μ V; dB referenced to one microvolt.

Radiated EMI: Data is in dB μ V/m; dB/m referenced to one microvolt per meter.

7) Test Site Locations

Conducted EMI: The AC powerline conducted emissions tests were performed in a shielded screen room located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS.

Radiated EMI: The radiated emissions tests were performed at Rogers Labs, Inc. 3 meters Open Area Test Site (OATS).

Site Approval: Refer to Appendix for FCC Site Approval Letter, Reference 31040/SIT 1300F2, Dated February 6, 1998.

8) SUBPART B – Unintentional Radiators

Conducted EMI

The EUT was arranged in a typical equipment configuration and placed on a 1 x 1.5-meter wooden bench 80 cm above the conducting ground plane, floor of a screen room. The bench was positioned 40 cm away from the wall of the screen room.

The LISN was positioned on the floor of the screen room 80-cm from the rear of the EUT. The power cord of the laptop was connected to the LISN. A second LISN was also positioned on the floor of the screen room and used to power the auxiliary

ROGERS LABS, INC. Kustom Signals, Inc..
4405 W. 259th Terrace MODEL: DRU Traffic Monitor
Louisburg, KS 66053 Test #: 000126 FCCID#: IVQDRU
Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c Page 8 of 38
CERTIFICATION\KUSTOMDRU15245 03/07/2000

equipment. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor, internal to the LISN. Power line conducted emissions testing was carried out individually for each current carrying conductor of the laptop computer. The excess length of lead between the system and the LISN receptacle was folded back and forth to form a bundle not exceeding 40 cm in length. The screen room, conducting ground plane, analyzer and LISN were bonded together to the protective earth ground. Preliminary testing was performed to identify the frequencies of the emissions, which had the highest amplitudes. The cables were repositioned to obtain maximum amplitude of measured EMI level. Once the worst case configuration was identified, plots were made of the EMI from 0.15 MHz to 30 MHz then the data was recorded with maximum conducted emissions levels. Refer to figures 1 and 2 for plots of conducted emissions for the laptop computer.

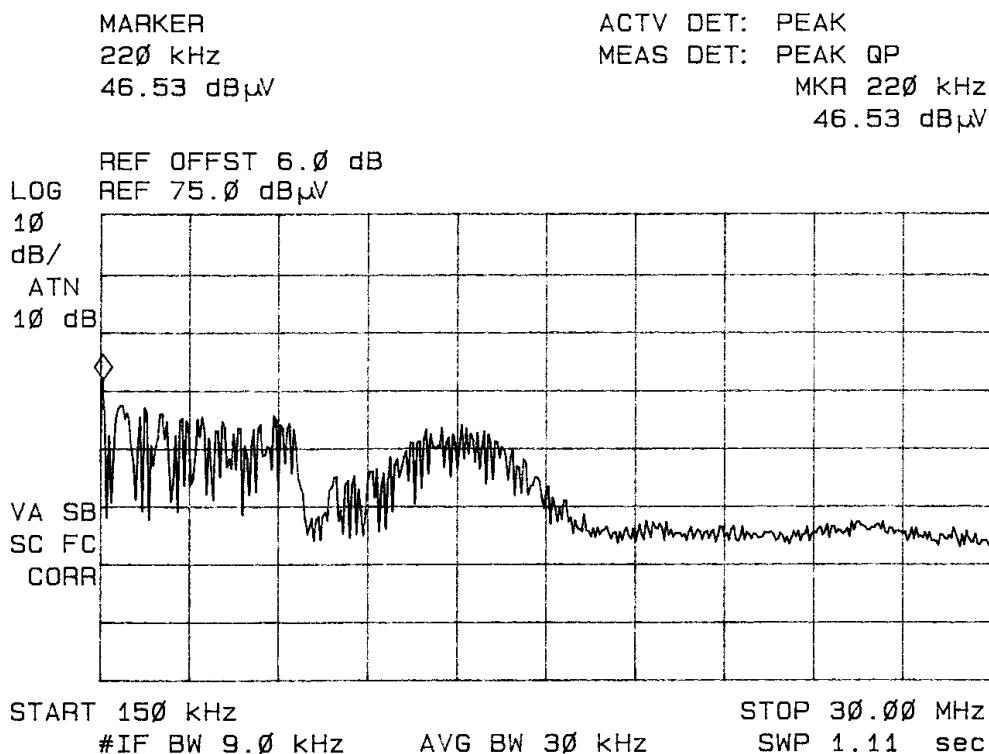


Figure 1 Line conducted emissions L1

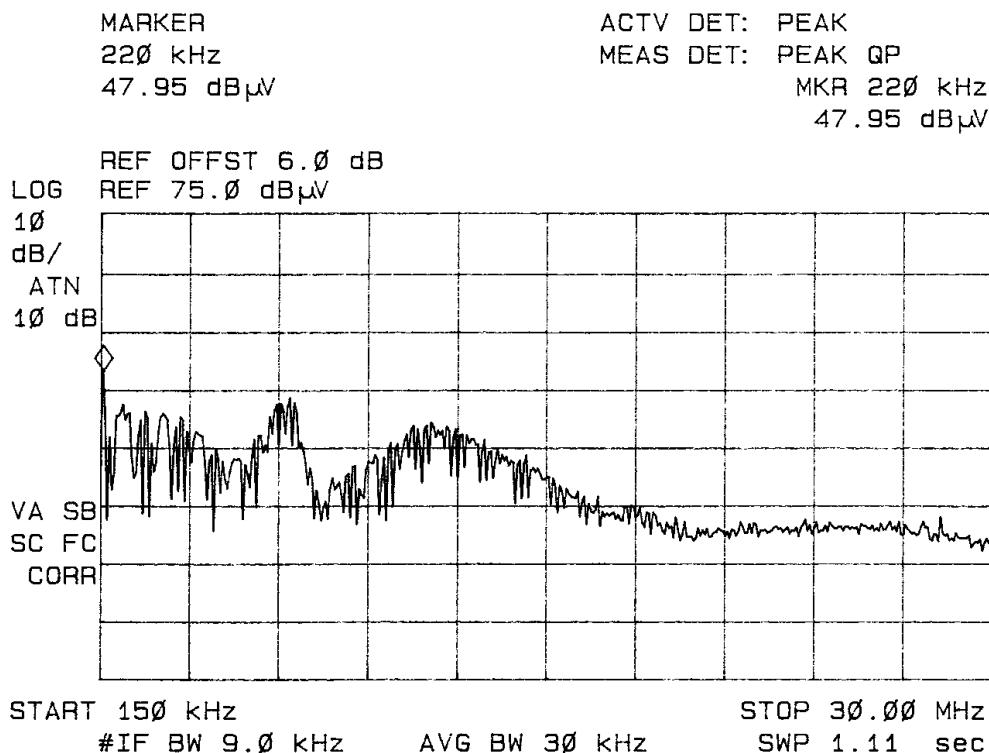


Figure 2 Line conducted emissions L2

ROGERS LABS, INC.

Kustom Signals, Inc..

4405 W. 259th Terrace

MODEL: DRU Traffic Monitor

Louisburg, KS 66053

Test #: 000126 FCCID#: IVQDRU

Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c

Radiated EMI

The EUT was arranged in a typical equipment configuration and operated in a standard mode. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Plots were made of the frequency spectrum from 30 MHz to 1000 MHz for the preliminary testing. Refer to figures 3 through 8 for plots of the frequency spectrum produced by the EUT, EUT and support equipment, and support equipment. The EUT and cable locations were noted and reconfigured at the open area test site. The highest radiated emission was then re-maximized at this location before final radiated emissions measurements were performed. Final data was taken with the EUT located at the OATS at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 30 MHz to 1000 MHz was searched for radiated emissions. Measured emission levels were maximized by EUT placement on the table, changing cable location, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Broadband Biconical from 30 to 200 MHz, Log Periodic from 200 MHz to 5

$$\begin{aligned}
 @ 3m &= 63.9 + 8.9 - 35 \\
 &= 37.8
 \end{aligned}$$

MARKER
 200.5 MHz
 43.75 dB μ V

ACTV DET: PEAK
 MEAS DET: PEAK QP
 MKR 200.5 MHz
 43.75 dB μ V

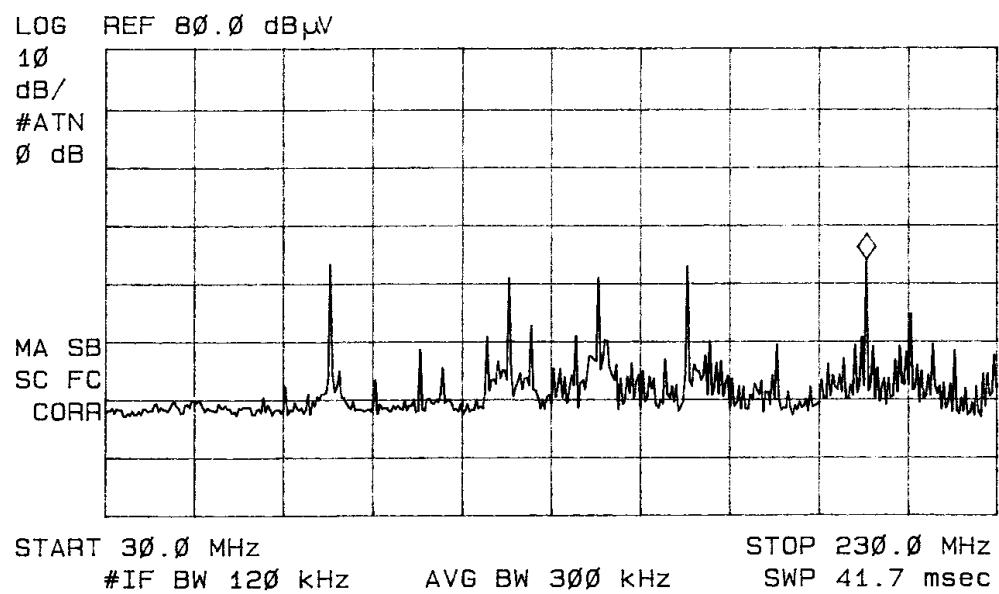


Figure 3 Radiated Emissions taken in screen room (EUT only).

MARKER
243 MHz
43.62 dB μ V

ACTV DET: PEAK
MEAS DET: PEAK QP
MKR 243 MHz
43.62 dB μ V

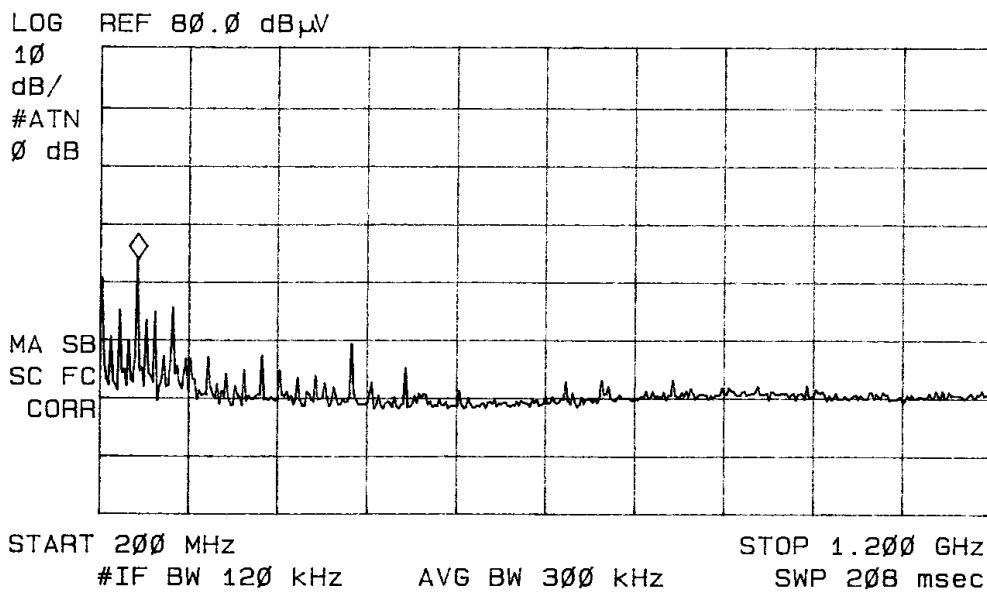


Figure 4 Radiated Emissions taken in screen room (EUT only).

MARKER
140.5 MHz
44.82 dB μ V

ACTV DET: PEAK
MEAS DET: PEAK QP
MKR 140.5 MHz
44.82 dB μ V

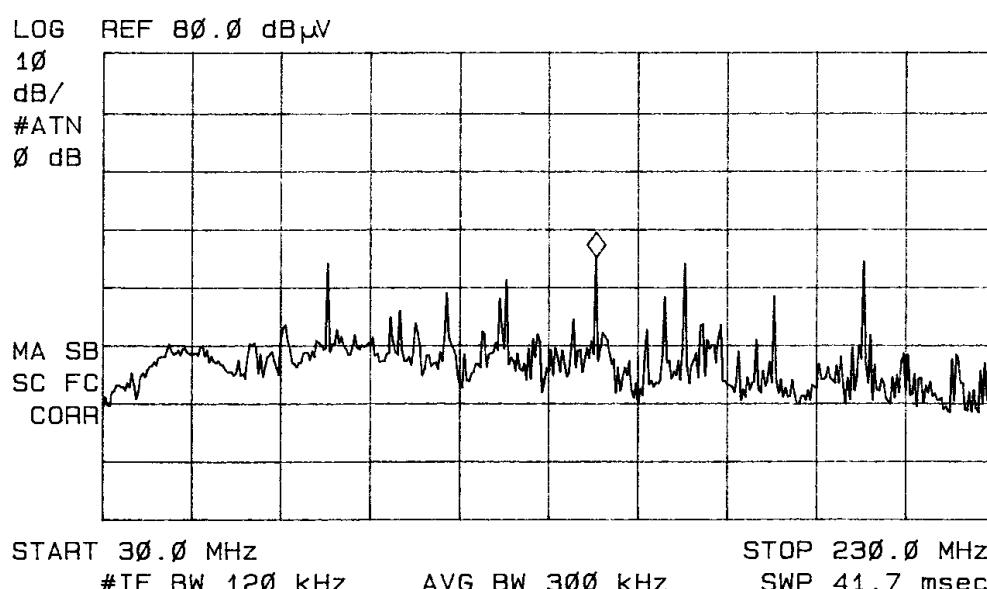


Figure 5 Radiated Emissions taken in screen room (EUT and support equipment).

ROGERS LABS, INC.

Kustom Signals, Inc..

4405 W. 259th Terrace

MODEL: DRU Traffic Monitor

Louisburg, KS 66053

Test #: 000126 FCCID#: IVODRUE

Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c

MARKER
243 MHz
43.32 dB μ V

ACTV DET: PEAK
MEAS DET: PEAK QP
MKR 243 MHz
43.32 dB μ V

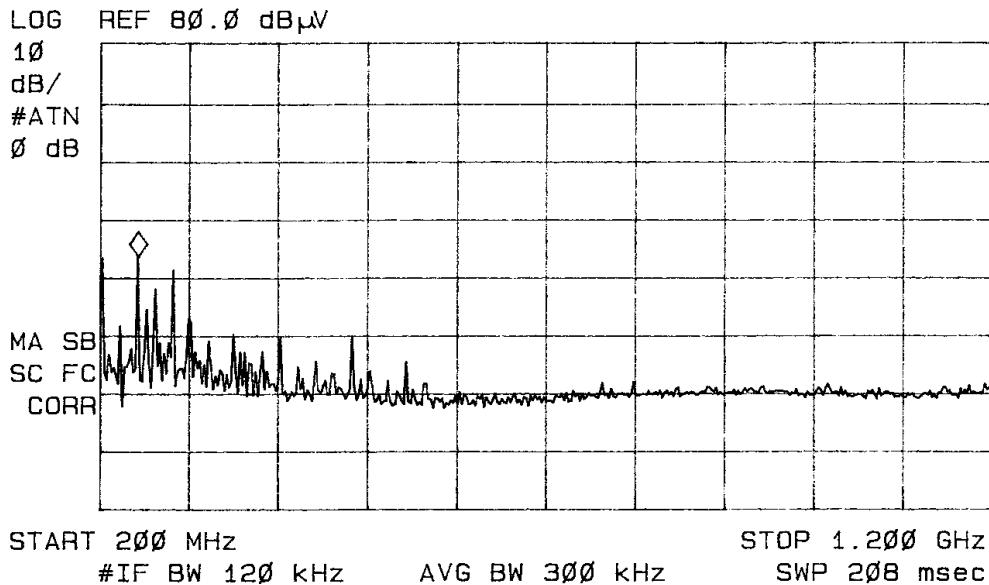


Figure 6 Radiated Emissions taken in screen room (EUT and support equipment).

MARKER
140.5 MHz
40.06 dB μ V

ACTV DET: PEAK
MEAS DET: PEAK QP
MKR 140.5 MHz
40.06 dB μ V

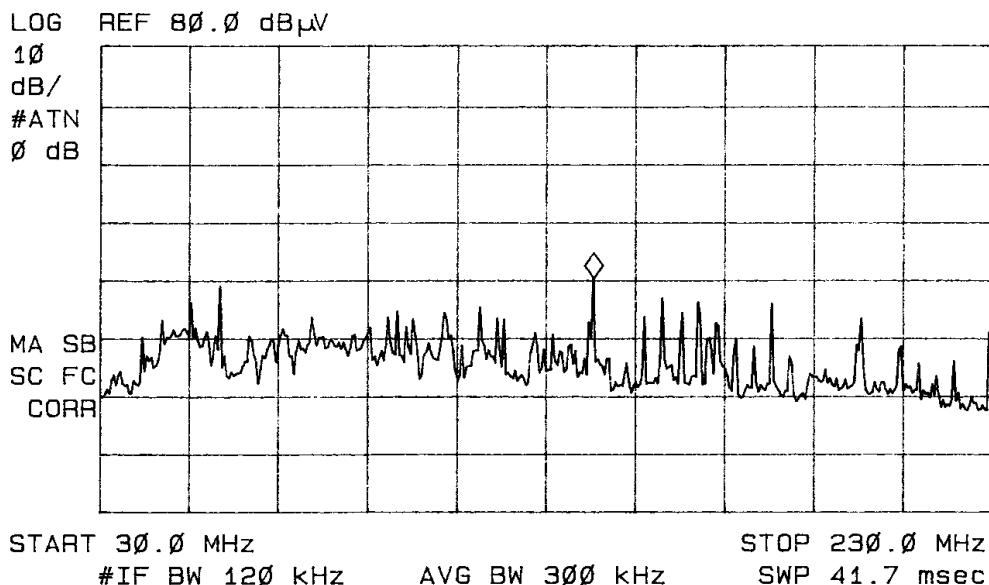


Figure 7 Radiated Emissions taken in screen room (Support Equipment only).

MARKER
303 MHz
33.30 dB μ V

ACTV DET: PEAK
MEAS DET: PEAK QP
MKR 303 MHz
33.30 dB μ V

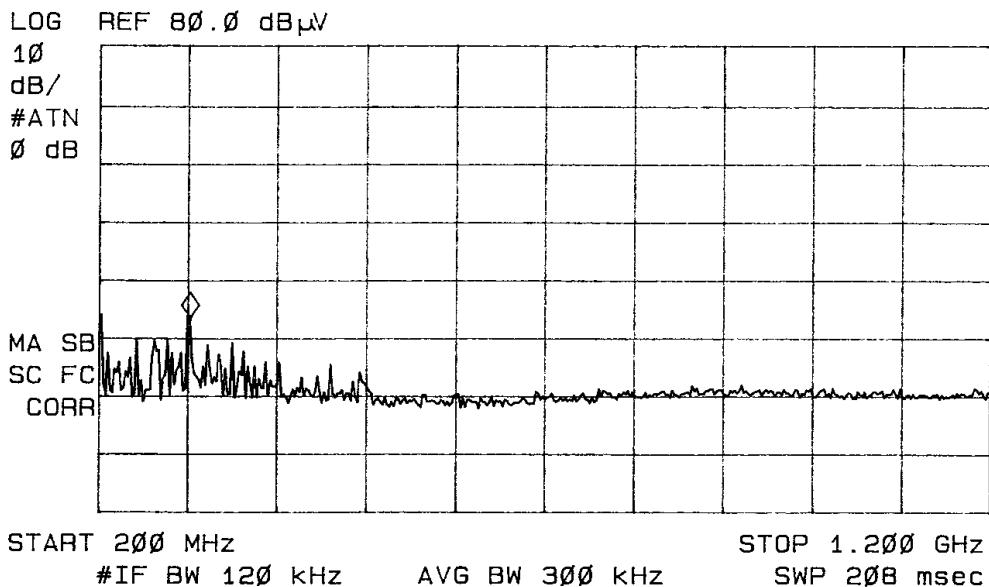


Figure 8 Radiated Emissions taken in screen room (Support Equipment only).

Data: Conducted (7 Highest Emissions):

Frequency In MHz	L1 Peak Level In dB μ V	L2 Peak Level In dB μ V	FCC Quasi-peak Limit in dB μ V
0.22	46.5	47.9	N/A
0.45	37.0	36.7	48.0
0.9	42.1	42.2	48.0
1.6	41.8	41.0	48.0
6.0	40.4	42.2	48.0
6.5	38.2	43.4	48.0
6.6	39.0	42.6	48.0

Other emissions present had amplitudes at least 10 dB below the limit.

ROGERS LABS, INC. Kustom Signals, Inc..
4405 W. 259th Terrace MODEL: DRU Traffic Monitor
Louisburg, KS 66053 Test #: 000126 FCCID#: IVQDRU
Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c

Data: EUT and System Radiated Emissions (9 Highest) :

Frequency In MHz	FSM Hor. (dB μ V) Quasi-Peak	FSM Vert. (dB μ V) Quasi-Peak	Ant. Fact. (dB)	Amp. Gain (dB)	Comp. Hor. (dB μ V/m) @ 3m	Comp. Vert. (dB μ V/m) @ 3 m	FCC Limit (dB μ V)
80.0	63.9	55.3	8.9	35	37.8	29.2	40.0
117.2	69.5	57.8	7.6	35	42.1	30.4	43.5
120.0	60.5	67.1	7.9	35	33.4	40.0	43.5
140.0	64.0	67.1	10.5	35	39.5	42.6	43.5
160.0	64.1	62.2	9.7	35	38.8	36.9	43.5
180.0	60.1	59.0	9.6	35	34.7	33.6	43.5
220.0	51.0	53.6	11.1	35	27.1	29.7	46.0
250.0	55.3	51.4	12.1	35	32.4	28.5	46.0
260.0	63.2	52.4	13.2	35	41.4	30.6	46.0

Other emissions present had amplitudes at least 10 dB below the limit.

Data: Support Equipment Radiated Emissions (6 Highest) :

Frequency In MHz	FSM Hor. (dB μ V) Quasi-peak	FSM Vert. (dB μ V) Quasi-peak	Ant. Fact. (dB)	Amp. Gain (dB)	Comp. Hor. (dB μ V/m) @ 3m	Comp. Vert. (dB μ V/m) @ 3 m	FCC Limit (dB μ V)
63.3	54.2	61.1	6.7	35	25.9	32.8	40.0
68.4	49.5	59.4	6.7	35	21.2	31.1	40.0
132.8	44.1	56.9	8.9	35	18.0	30.8	43.5
155.5	44.2	63.0	10.7	35	19.9	38.7	43.5
159.6	42.8	60.9	10.7	35	18.5	36.6	43.5
163.7	53.8	63.4	9.7	35	28.5	38.1	43.5

Other emissions present had amplitudes at least 10 dB below the limit.

Summary of Results for Conducted Emissions:

The conducted emissions for the EUT meet the requirements for FCC Part 15B CLASS B Digital Devices. The EUT had a 4.6 dB minimum margin below the limit. Other emissions were present with amplitudes at least 10.0 dB below the limit.

Summary of Results for Radiated Emissions:

The radiated emissions for the EUT meet the requirements for FCC Part 15B CLASS B Digital Devices. The EUT had a 0.9 dB minimum margin below the limit. Other emissions were present with amplitudes at least 10 dB below the limit.

Statement of Modifications:

No modifications to the EUT were required for the unit to meet the FCC Part 15B CLASS B emissions standards. There were no deviations to the specifications.

9) Subpart C - Intentional Radiators

As per CFR Part 15, Subpart C. The following information is submitted:

15.203 Antenna Requirements

The unit is produced with a permanently attached antenna. The antenna is not replaceable or user serviceable. The requirements of 15.203 are met; there are no deviations or exceptions to the specification.

Restricted Bands of Operation Per 15.205

Spurious emissions falling in the restricted frequency bands of operation were measured at the OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were checked at the OATS, using appropriate antennas or pyramidal horns,

amplification stages, and a spectrum analyzer. No other significant emission was observed which fell into the restricted bands of operation.

Data 15.205:

Radiated Emissions In Restricted Bands:

Emission Frequency (MHz)	FSM Horz. (dB μ V)	FSM Vert. (dB μ V)	Ant. Factor (dB)	Amp. Gain (dB)	RFS Horz. @ 3m (dB μ V/m)	RFS Vert. @ 3m (dB μ V/m)	Limit @ 3m (dB μ V/m)
120.0	60.5	67.1	7.9	35	33.4	40.0	43.5
163.6	57.8	61.0	9.7	35	32.5	35.7	43.5
240.0	63.8	63.0	12.1	35	40.9	40.1	46.0
250.0	55.3	51.4	12.1	35	32.4	28.5	46.0
260.0	63.2	52.4	13.2	35	41.1	30.6	46.0
280.0	57.6	52.4	13.2	35	35.8	30.6	46.0

No other emissions found in the restricted bands.

Sample Calculations:

$$\begin{aligned}
 \text{Computed Quasi-Peak (dB μ V/m @ 3m)} &= \text{FSM(dB μ V)} + \text{A.F.(dB)} - \text{Gain(dB)} \\
 &= 60.5 + 7.9 - 35 \\
 &= 33.4
 \end{aligned}$$

15.209 Radiated Emissions Limits; General Requirements

Radiated EMI

The EUT was arranged in a typical equipment configuration and operated in a standard mode. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Plots were made of the frequency spectrum from 30 MHz to 40 GHz for the preliminary testing. The highest radiated emission was then re-maximized at this location before final radiated emissions measurements were performed. Final data was taken with the EUT located at the open field test site at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 30 MHz to 100 GHz was searched for radiated emissions. Measured emission levels were maximized by EUT placement on the table, changing cable location, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna polarization between horizontal and vertical. Antennas used were Broadband Biconical from 30 MHz to 200 MHz, Log Periodic from 200 MHz to 5 GHz and/or Biconilog from 30 MHz to 1000 MHz; and pyramidal horns and or mixers from 4 GHz to 100 GHz

Data 15.209:

Data: EUT and System Radiated Emissions (9 Highest):

Frequency In MHz	FSM Hor. (dB μ V) Quasi-Peak	FSM Vert. (dB μ V) Quasi-Peak	Ant. Fact. (dB)	Amp. Gain (dB)	Comp. Hor. (dB μ V/m) @ 3m	Comp. Vert. (dB μ V/m) @ 3 m	FCC Limit (dB μ V)
80.0	63.9	55.3	8.9	35	37.8	29.2	40.0
117.2	69.5	57.8	7.6	35	42.1	30.4	43.5
120.0	60.5	67.1	7.9	35	33.4	40.0	43.5
140.0	64.0	67.1	10.5	35	39.5	42.6	43.5
160.0	64.1	62.2	9.7	35	38.8	36.9	43.5
180.0	60.1	59.0	9.6	35	34.7	33.6	43.5
220.0	51.0	53.6	11.1	35	27.1	29.7	46.0
250.0	55.3	51.4	12.1	35	32.4	28.5	46.0
260.0	63.2	52.4	13.2	35	41.4	30.6	46.0

Other emissions present had amplitudes at least 10 dB below the limit.

Sample Calculations:

RFS = Radiated Field Strength

dB μ V/m @ 3m = dB μ V + A.F. - Amplifier Gain

$$\begin{aligned} \text{dB}\mu\text{V/m} @ 3\text{m} &= 63.9 + 8.9 - 35 \\ &= 37.8 \end{aligned}$$

Summary of Results for Radiated Emissions:

The radiated emissions for the EUT meet the requirements for FCC Part 15C Intentional Radiators. The EUT had a 0.9 dB minimum margin below the limits. Other emissions were present with amplitudes at least 10 dB below the FCC Limits.

15.245 Operation in the Band 24.00-24.25 GHz

The power output was measured on an open field test site @ 3 meters. Data was taken per Paragraph 2.1046(a) and 15.245.

(a) The EUT was placed on a wooden turntable 0.8 meters above the ground plane and at a distance of 3 meters from the FSM antenna. The amplitude of the carrier frequency was measured using a spectrum analyzer. The amplitude of the emission was then recorded from the analyzer display.

(b) Emissions radiated outside of the specified bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation. The amplitudes of each spurious emission were measured at a distance of 3 meters from the FSM antenna at the OATS. The amplitude of each spurious emission was maximized by varying the FSM antenna height, polarization, and by rotating the turntable. A Biconilog Antenna was used for measuring emissions from 30 to 1000 MHz, a Log Periodic Antenna for 200 to 5000 MHz; and/or Pyramidal Horn Antenna and/or mixers from 4 to 100 GHz. Emissions were measured in dB μ V/m and converted to dB μ V/m @ 3 meters using the following equation.

Data: Intentional Radiated Emissions:

FREQ.	FSM IN HOR. dB μ V	FSM IN VERT. dB μ V	ANT. FACT.	AMP. GAIN	LEVEL IN dB μ V/m @ 3m HOR.	LEVEL IN dB μ V/m @ 3m VERT.	LEVEL IN dB μ V/m @ 3m
24129.0	87.8	73.3	20	0	107.8	93.3	107.9

Note: Level was measured @ 3 meter site.

$$\begin{aligned} \text{dB}\mu\text{V/m}@ 3\text{m} &= \text{FSM} + \text{A.F.} - \text{AMP. GAIN} & \mu\text{V/M} &= 10^{((\text{dB}\mu\text{V/m}/20)} \\ &= 87.8 + 20.0 & &= 245.47\text{E}3 \mu\text{V/M} \\ &= 107.8 \end{aligned}$$

Refer to Figures 9 through 16 showing plots taken in the screen room from the spectrum analyzer at a distance of 1 meter. The band edges are protected due to the frequency band of operation.

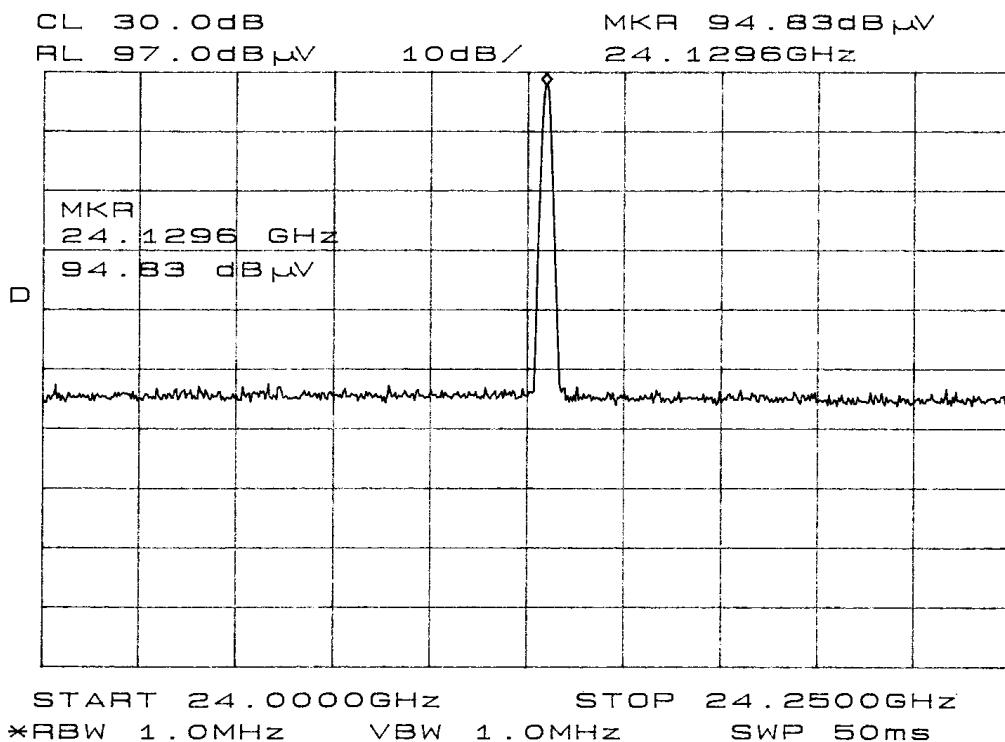


Figure 9 Emissions @ 1 Meter in Screen Room

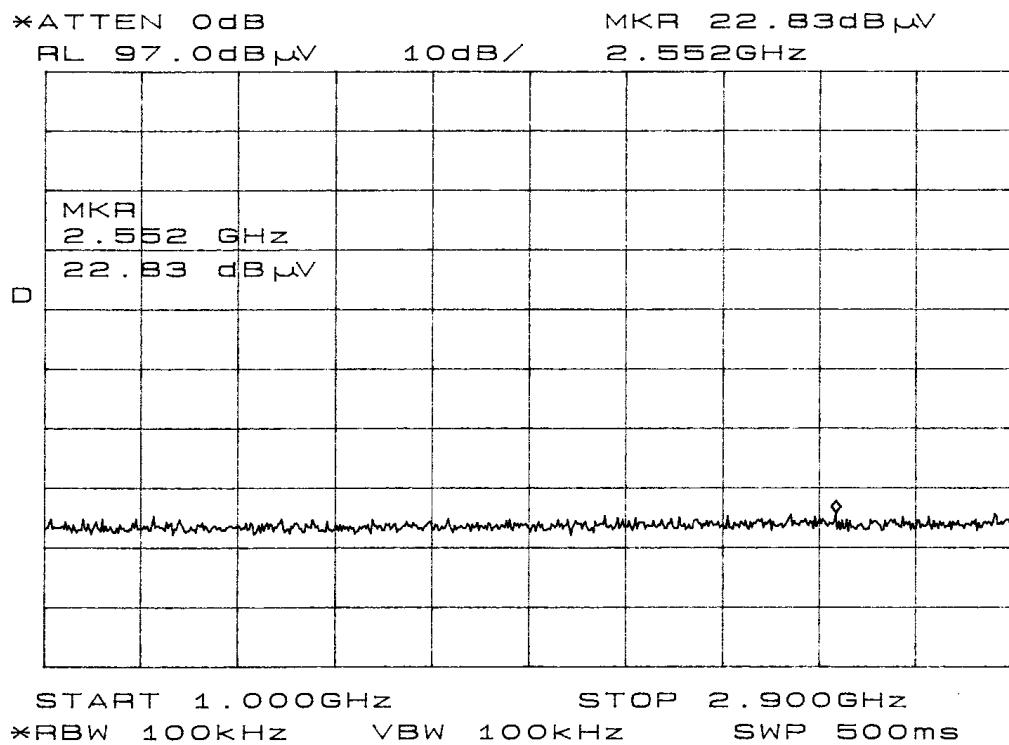


Figure 10 Emissions @ 1 Meter in Screen Room

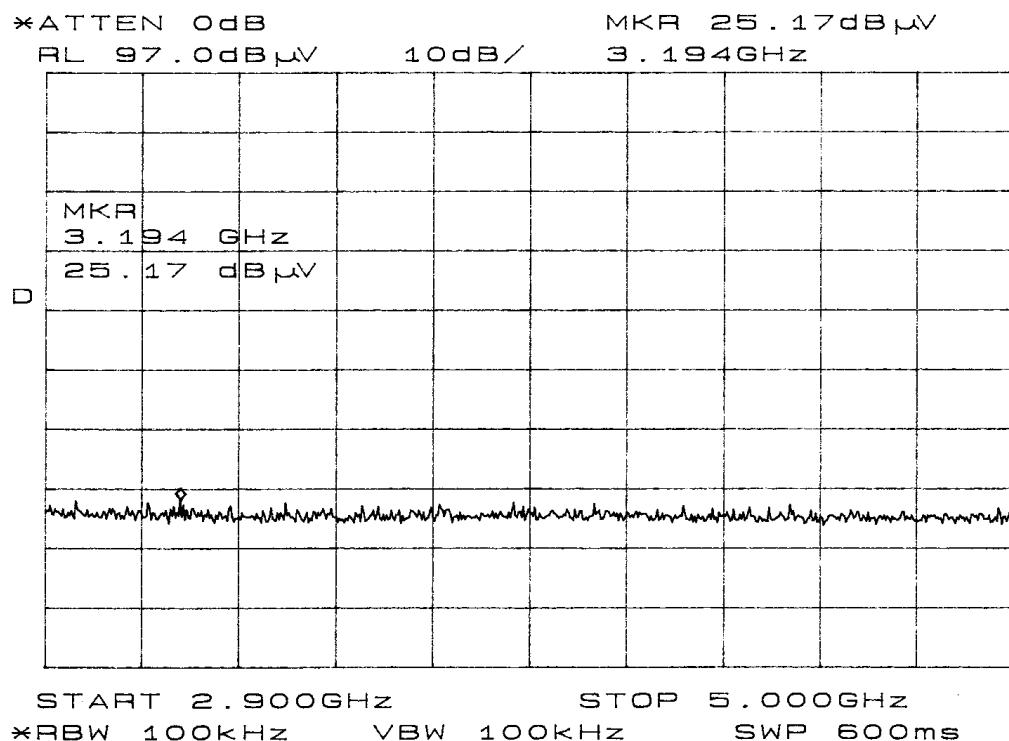


Figure 11 Emissions @ 1 Meter in Screen Room

ROGERS LABS, INC.

Kustom Signals, Inc..

4405 W. 259th Terrace

MODEL: DRU Traffic Monitor

1005 W. 235th Terrace

Test #: 000126 ECCTD #: TY0DBU

Phone/Fax: (813) 837-3314 Test to: FCC Parts 3 and 15c

Page 23 of 38
CERTIFICATION\KUSTOMDRII15245 03/07/2000

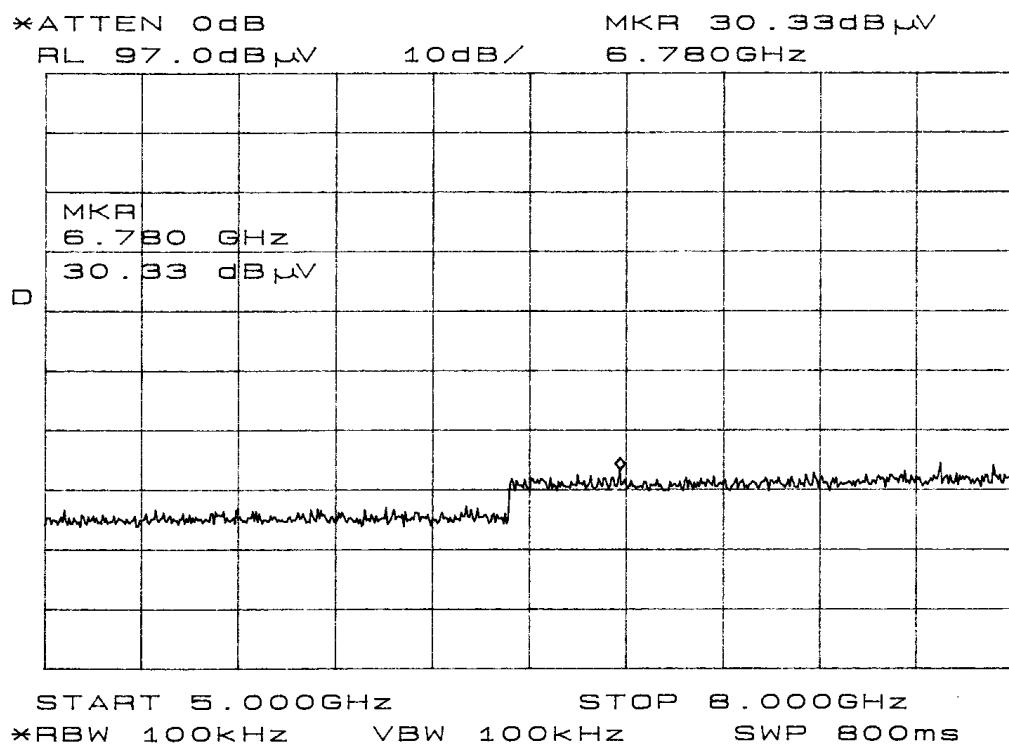


Figure 12 Emissions @ 1 Meter in Screen Room

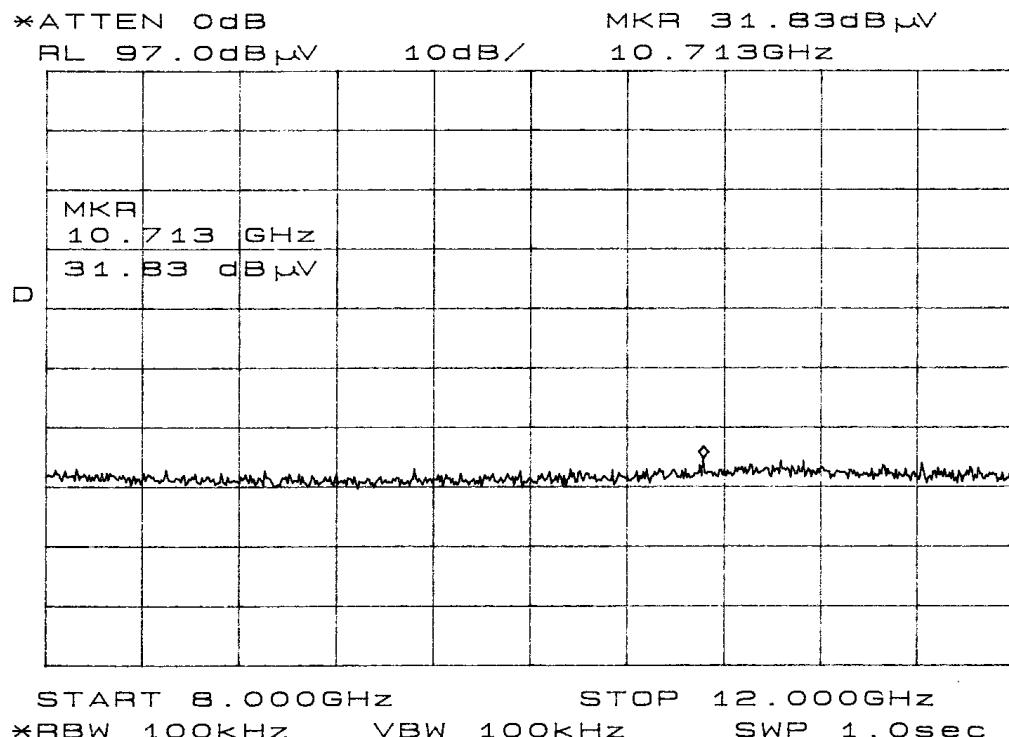


Figure 13 Emissions @ 1 Meter in Screen Room

ROGERS LABS, INC.

4405 W. 259th Terrace

Louisburg, KS 66053

Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c

Kustom Signals, Inc..

MODEL: DRU Traffic Monitor

Test #: 000126 FCCID#: IVQDRU

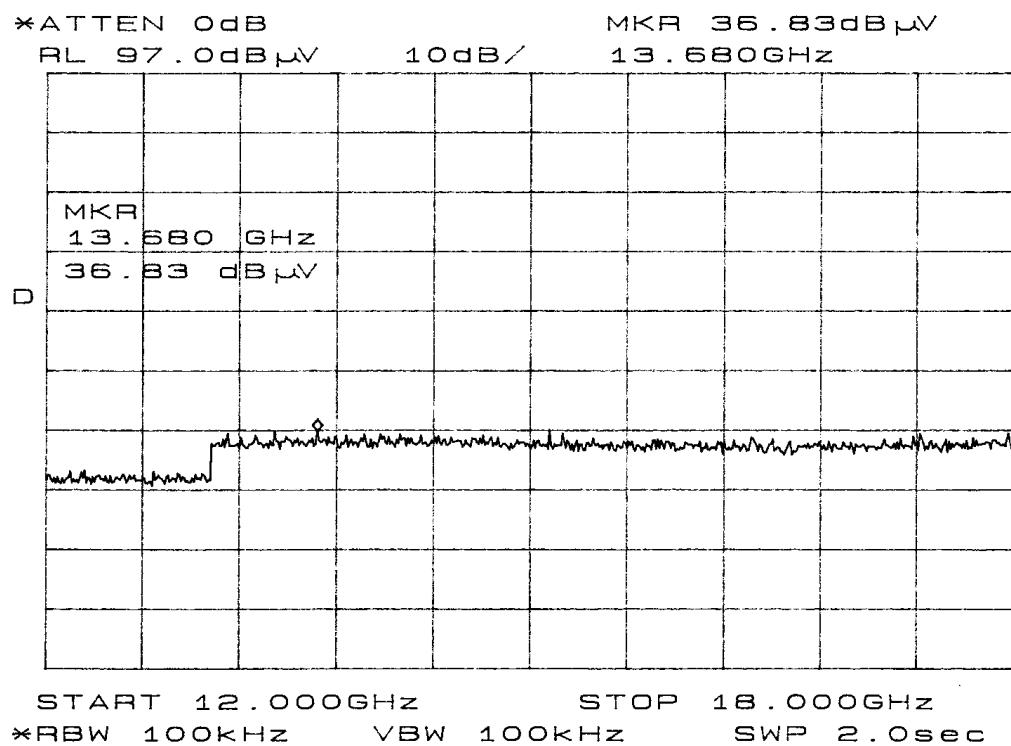


Figure 14 Emissions @ 1 Meter in Screen Room

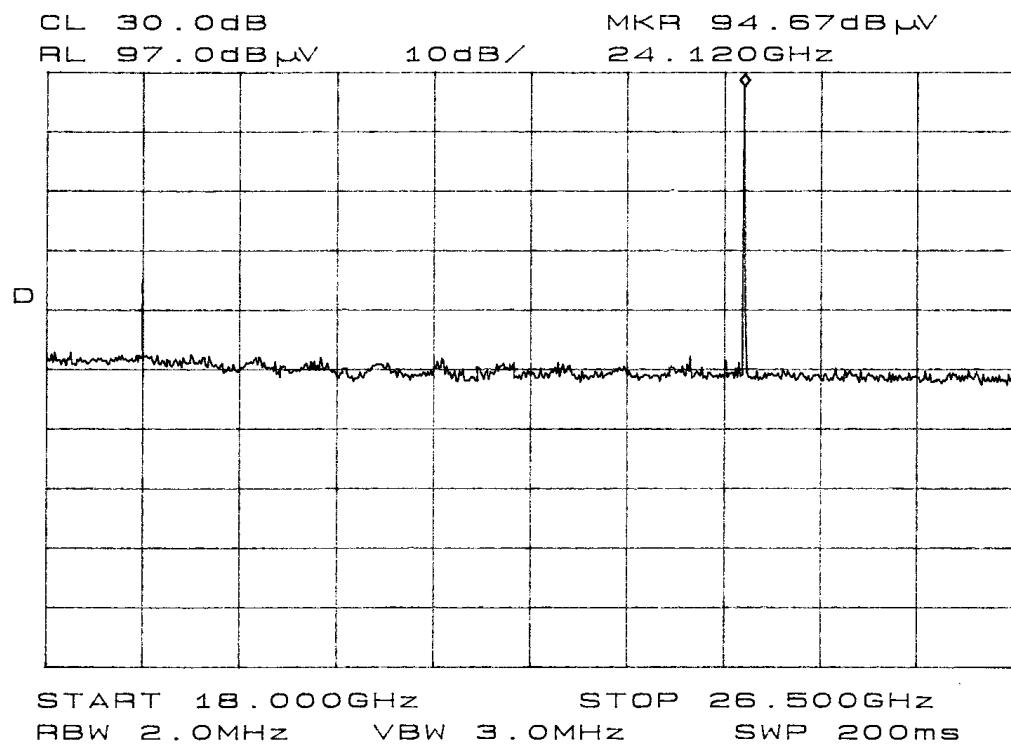


Figure 15 Emissions @ 1 Meter in Screen Room

ROGERS LABS, INC.

4405 W. 259th Terrace

Louisburg, KS 66053

Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c

Kustom Signals, Inc..

MODEL: DRU Traffic Monitor

Test #: 000126 FCCID#: IVQDRU

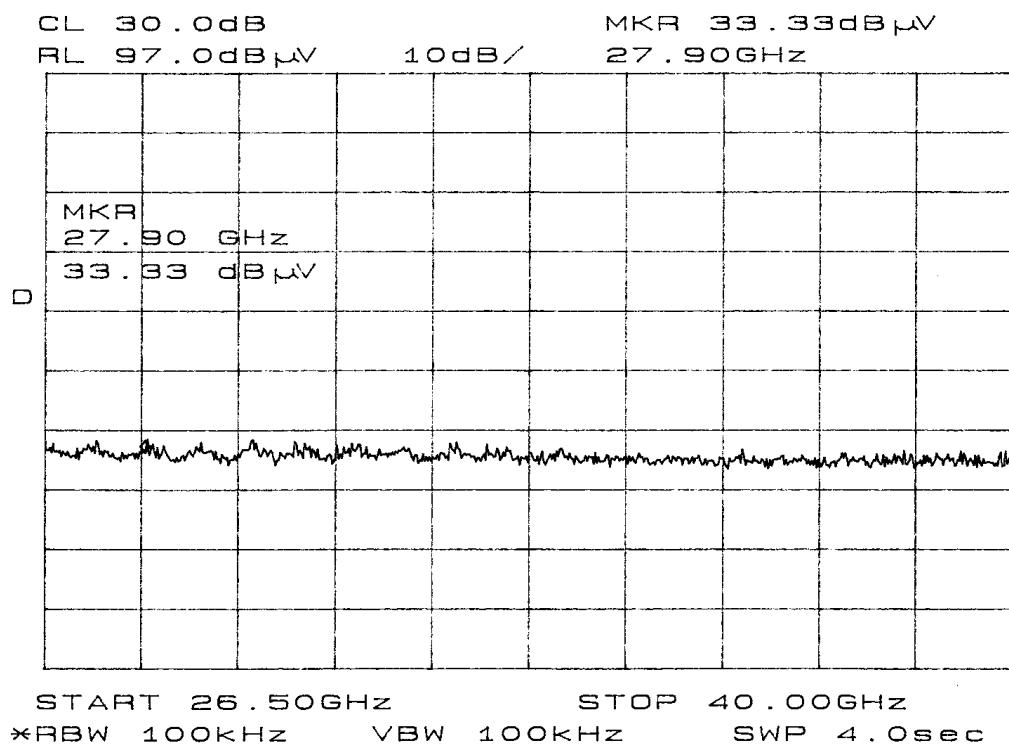


Figure 16 Emissions @ 1 Meter in Screen Room

Radiated Emissions of Intentional Radiator:

The EUT had a 0.1 dB margin below the limits. The radiated emissions for the EUT meet the requirements for FCC Part 15C Intentional Radiators. There are no measurable emissions in the restricted bands other than those recorded in this report. Other emissions were present with amplitudes at least 10 dB below the FCC Limits. The specification of 15.245 are met, there are no deviations or exceptions to the requirements.

Statement of Modifications:

No modifications to the EUT were required for the unit to meet the FCC Part 15B CLASS B emissions standards. There were no deviations to the specifications.

ROGERS LABS, INC. Kustom Signals, Inc..
4405 W. 259th Terrace MODEL: DRU Traffic Monitor
Louisburg, KS 66053 Test #: 000126 FCCID#: IVQDRU
Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c

APPENDIX

Model: DRU

1. Photos of Conducted Emissions Test Set Up
2. Photos of Radiated Emissions Test Set Up
3. Photos of Case Front and Back
4. Photo Inside of Case
5. Photos RF Printed Circuit Board
6. Photos Digital Printed Circuit Board
7. Photo FCC ID Label Location
8. Rogers Qualifications
8. Test Equipment List
9. FCC Site Approval Letter

KUSTOM SIGNALS, INC.
MODEL: DRU
PHOTOS OF CONDUCTED EMISSIONS TEST SET UP



ROGERS LABS, INC.

4405 W. 259th Terrace

Louisburg, KS 66053

Phone/Fax: (913) 837-3214

Kustom Signals, Inc..


MODEL: DRU Traffic Monitor

Test #: 000126 FCCID#: IVQDRU

Test to: FCC Parts 2 and 15c

Page 29 of 38
CERTIFICATION\KUSTOMDRU15245 03/07/2000

KUSTOM SIGNALS, INC.
MODEL: DRU
PHOTOS OF RADIATED EMISSIONS TEST SET UP

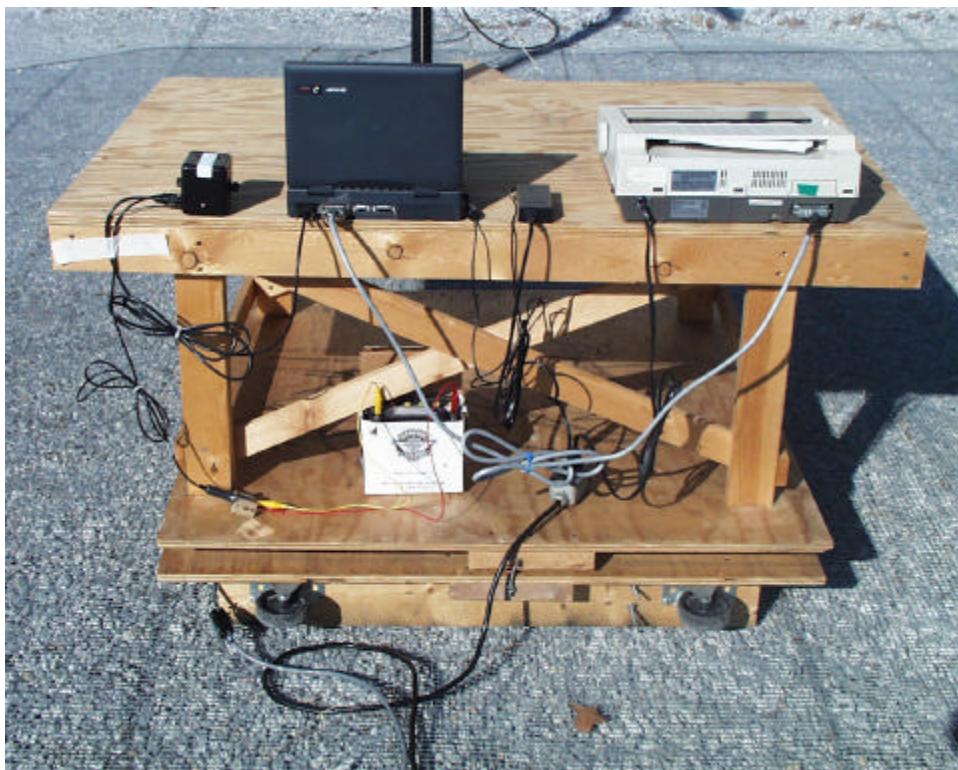

ROGERS LABS, INC.

4405 W. 259th Terrace

Louisburg, KS 66053

Phone/Fax: (913) 837-3214

Kustom Signals, Inc..

MODEL: DRU Traffic Monitor

Test #: 000126 FCCID#: IVQDRU

Test to: FCC Parts 2 and 15c

Page 30 of 38
CERTIFICATION\KUSTOMDRU15245 03/07/2000

KUSTOM SIGNALS, INC.
MODEL: DRU
PHOTOS OF CASE FRONT AND BACK



ROGERS LABS, INC.

4405 W. 259th Terrace

Louisburg, KS 66053

Phone/Fax: (913) 837-3214

Kustom Signals, Inc..


MODEL: DRU Traffic Monitor

Test #: 000126 FCCID#: IVQDRU

Test to: FCC Parts 2 and 15c

Page 31 of 38
CERTIFICATION\KUSTOMDRU15245 03/07/2000

KUSTOM SIGNALS, INC.
MODEL: DRU
PHOTO OF INSIDE CASE

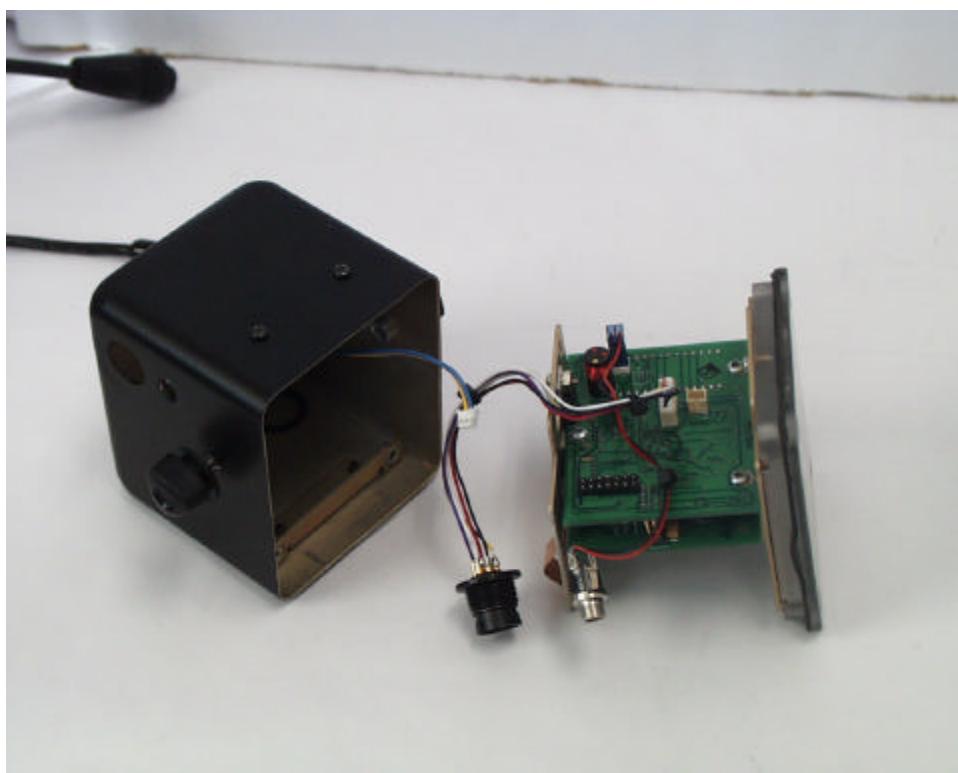

ROGERS LABS, INC.

4405 W. 259th Terrace

Louisburg, KS 66053

Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c

Kustom Signals, Inc..

MODEL: DRU Traffic Monitor

Test #: 000126 FCCID#: IVQDRU

Page 32 of 38
CERTIFICATION\KUSTOMDRU15245 03/07/2000

KUSTOM SIGNALS, INC.
MODEL: DRU
PHOTOS OF RF PRINTED CIRCUIT BOARD



ROGERS LABS, INC.

4405 W. 259th Terrace

Louisburg, KS 66053

Phone/Fax: (913) 837-3214



Kustom Signals, Inc..

MODEL: DRU Traffic Monitor

Test #: 000126 FCCID#: IVQDRU

Test to: FCC Parts 2 and 15c

KUSTOM SIGNALS, INC.
MODEL: DRU
PHOTOS OF DIGITAL PRINTED CIRCUIT BOARD

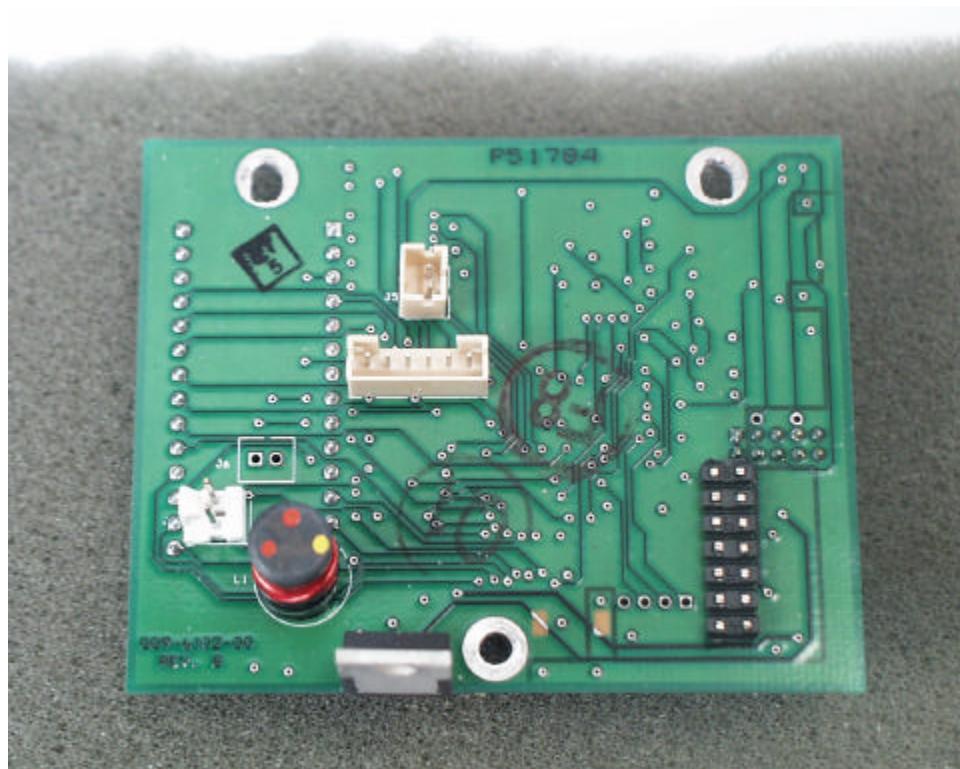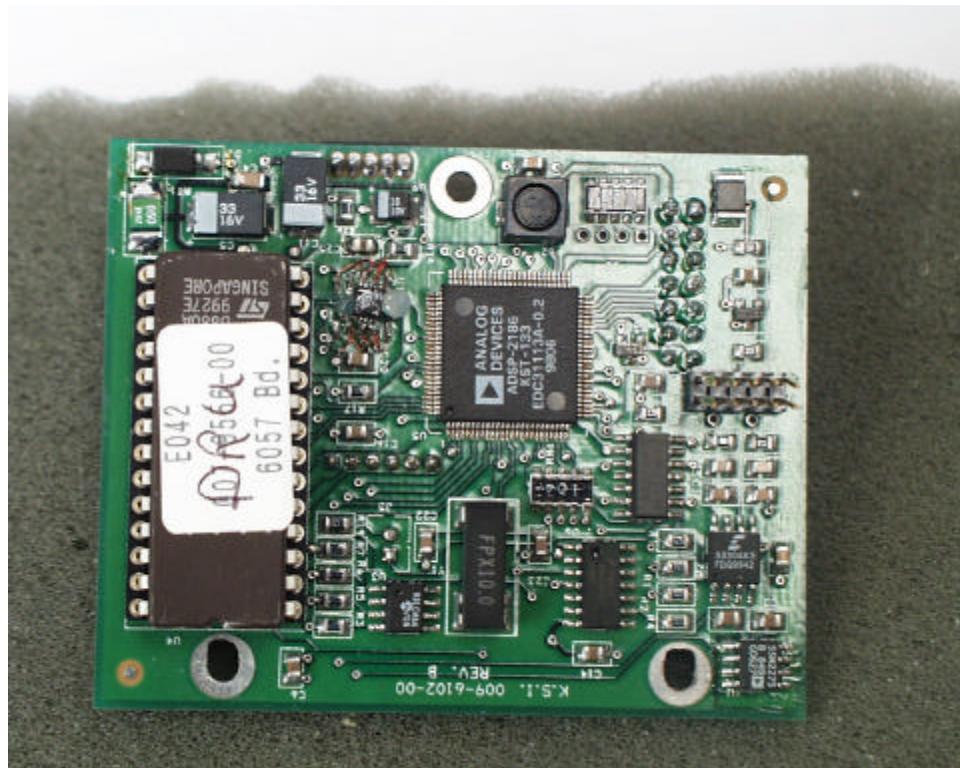

ROGERS LABS, INC.

4405 W. 259th Terrace

Louisburg, KS 66053

Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c

Kustom Signals, Inc..

MODEL: DRU Traffic Monitor

Test #: 000126 FCCID#: IVQDRU

Page 34 of 38
CERTIFICATION\KUSTOMDRU15245 03/07/2000

KUSTOM SIGNALS, INC.
MODEL: DRU
PHOTO FCC ID LABEL LOCATION



ROGERS LABS, INC. Kustom Signals, Inc..
4405 W. 259th Terrace MODEL: DRU Traffic Monitor
Louisburg, KS 66053 Test #: 000126 FCCID#: IVQDRU
Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c

Page 35 of 38
CERTIFICATION\KUSTOMDRU15245 03/07/2000

TEST EQUIPMENT LIST FOR ROGERS LABS, INC.

The equipment is used daily and kept in good calibration and operating condition. Calibration of critical items are checked for accuracy each time used.

List of Test Equipment:

Calibration Date:

Scope: Tektronix 2230	2/99
Wattmeter: Bird 43 with Load Bird 8085	2/99
Power Supplies: Sorensen SRL 20-25, DCR 150, DCR 140	2/99
H/V Power Supply: Fluke Model: 408B (SN: 573)	2/99
R.F. Generator: Boonton 102F	2/99
R.F. Generator: HP 606A	2/99
R.F. Generator: HP 8614A	2/99
R.F. Generator: HP 8640B	2/99
Spectrum Analyzer: HP 8562A,	2/99
Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W	
HP Adapters: 11518, 11519, 11520	
Spectrum Analyzer: HP 8591 EM	7/99
Frequency Counter: Weston 1255	2/99
Frequency Counter: Leader LDC 825	2/99
Antenna: EMCO Log Periodic	10/99
Antenna: BCD 235/BNC Antenna Research	10/99
Antenna: EMCO Dipole Set 3121C	2/99
Antenna: C.D. B-100	2/99
Antenna: Solar 9229-1 & 9230-1	2/99
Antenna: EMCO 6509	2/99
Microline Freq. Meter: Model 27B	2/99
Dana Modulation Meter: Model 9008	2/99
Audio Oscillator: H.P. 200CD	2/99
R.F. Power Amp 65W Model: 470-A-1000	9/97
R.F. Power Amp 50W M185- 10-500	9/97
R.F. PreAmp CPPA-102	9/97
Shielded Room 5 M x 3 M x 3.0 M (100 dB Integrity)	
LISN 50 μ Hy/50 ohm/0.1 μ f	10/99
LISN Compliance Eng. 240/20	2/99
SCS Power Amp Model: 2350A	2/99
Power Amp A.R. Model: 10W 1000M7	2/99
Power Amp EIN Model: A300	1/99
Linear Amp Mini Circuits: ZHL-1A (2 Units)	2/99
Combiner Unit Mini Circuits: ZSC-2-1 (2 Units)	2/99
ELGAR Model: 1751	2/99
ELGAR Model: TG 704A-3D	2/99
ELGAR Model: 400SD (PB)	2/99
ESD Test Set 2000i	10/95
Fast Transient Burst Generator Model: EFT/B-100	10/95
Current Probe: Singer CP-105	8/97
Current Probe: Solar 9108-1N	8/97
Field Intensity Meter: EFM-018	10/95
KETEK Ecat Surge Generator	10/99

11/01/99

ROGERS LABS, INC. Kustom Signals, Inc..
4405 W. 259th Terrace MODEL: DRU Traffic Monitor
Louisburg, KS 66053 Test #: 000126 FCCID#: IVQDRU
Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c

QUALIFICATIONS
of
SCOT D. ROGERS, ENGINEER
ROGERS LABS, INC.

Mr. Rogers has approximately 12 years experience in the field of electronics. Six years working in the automated controls industry and 6 years working with the design, development and testing of radio communications and electronic equipment.

POSITIONS HELD:

Systems Engineer: A/C Controls Mfg. Co., Inc.
6 Years

Electrical Engineer: Rogers Consulting Labs, Inc.
5 Years

Electrical Engineer: Rogers Labs, Inc.
Current

EDUCATIONAL BACKGROUND:

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.

Scot D Rogers
Scot D. Rogers

February 10, 2000
Date

1/11/99

ROGERS LABS, INC. Kustom Signals, Inc..
4405 W. 259th Terrace MODEL: DRU Traffic Monitor
Louisburg, KS 66053 Test #: 000126 FCCID#: IVQDRU
Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c

Page 37 of 38
CERTIFICATION\KUSTOMDRU15245 03/07/2000

FEDERAL COMMUNICATIONS COMMISSION

7435 Oakland Mills Road
Columbia, MD 21046
Telephone: 301-725-1585 (ext-218)
Facsimile: 301-344-2050

February 6, 1998

IN REPLY REFER TO
31040/SIT
1300F2

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053

Attention: **Scot D. Rogers**


Re: Measurement facility located at above address
(3 and 10 meter site)

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for certification or notification under Parts 15 or 18 of the Commission's Rules. Our list will also indicate that the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4-1992. Please note that this filing must be updated for any changes made to the facility, and at least every three years the data on file must be certified as current.

Per your request, the above mentioned facility has been also added to our list of those who perform these measurement services for the public on a fee basis. This list is updated monthly and is available on the Laboratory's Public Access Link (PAL) at 301-725-1072, and also on the Internet at the FCC Website www.fcc.gov/oet/info/database/testsite/.

Sincerely,



Thomas W. Phillips
Electronics Engineer
Customer Service Branch

ROGERS LABS, INC. Kustom Signals, Inc..
4405 W. 259th Terrace MODEL: DRU Traffic Monitor
Louisburg, KS 66053 Test #: 000126 FCCID#: IVQDRU
Phone/Fax: (913) 837-3214 Test to: FCC Parts 2 and 15c