


Appendix B

Output Power

Field Strength of Fundamental

FCC RULES PART 15, SUBPART C


EUT: REMOTE CONTROL
MODEL NO.: TX3312S
Approval Holder: AutoMicro Technology Inc.
Test Site / Operator: ETS / PIERCE PENG
Temperature/Voltage: Temp.: 23°C/ Unom.: 12 VDC (battery)
Test Specification: according to Section15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HL223
Freq: 433.928MHz, Emax: 80.47dB μ V/m, RBW: 100kHz

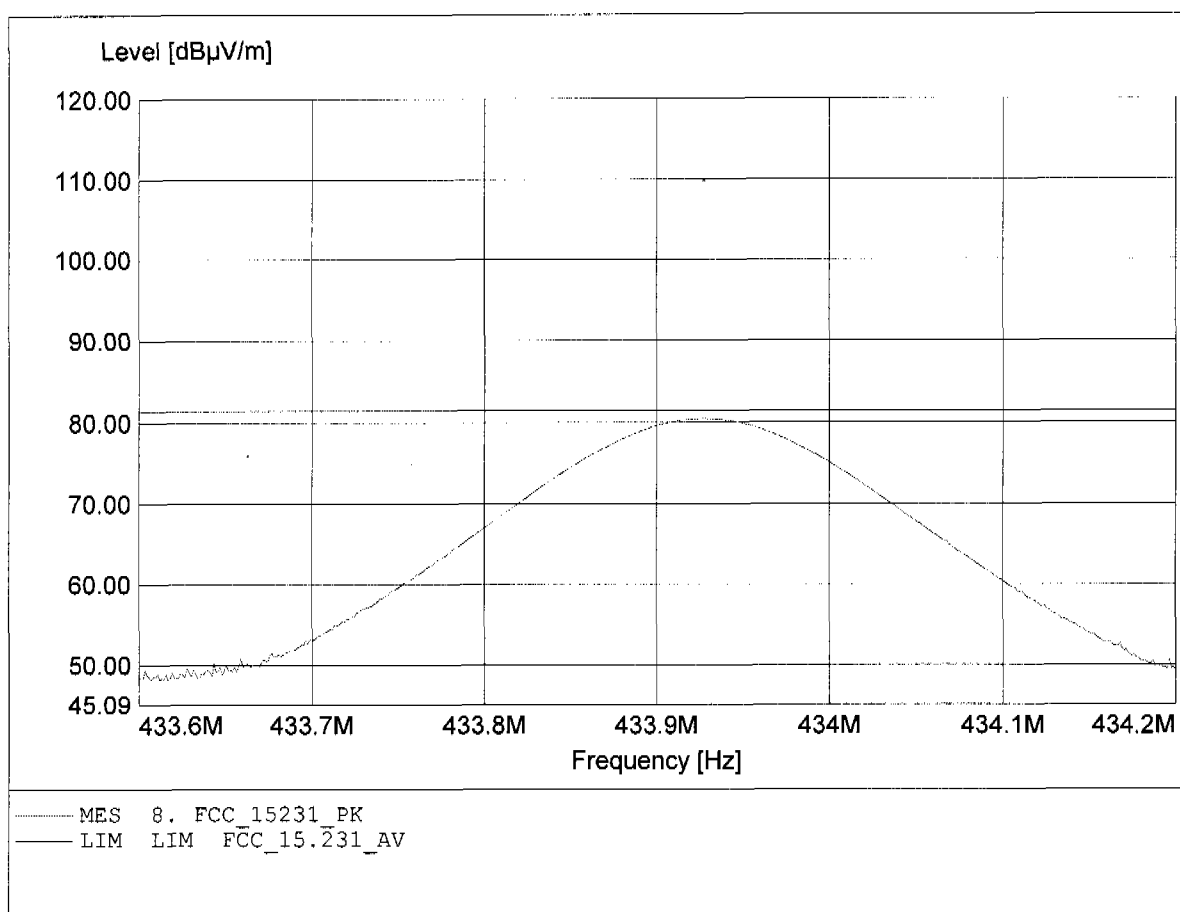

Field Strength of Fundamental

FCC RULES PART 15, SUBPART C

EUT: REMOTE CONTROL
MODEL NO.: TX3312S
Approval Holder: AutoMicro Technology Inc.
Test Site / Operator: ETS / PIERCE PENG
Temperature/Voltage: Temp.: 23°C/ Unom.: 12 VDC (battery)
Test Specification: according to Section 15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HL223
Freq: 433.926MHz, Emax: 75.78dBμV/m, RBW: 100kHz

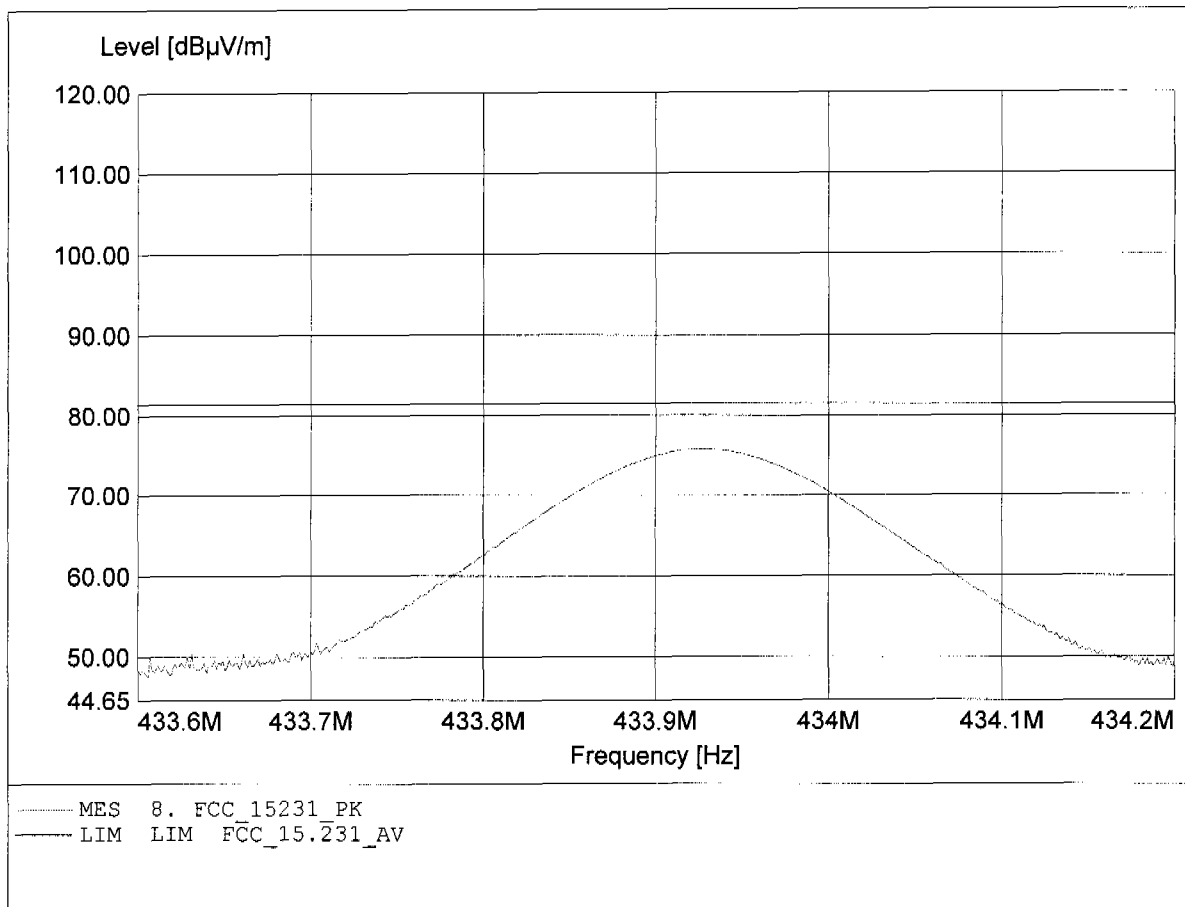


Appendix C

Spurious Emissions radiated, Transmitter

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: REMOTE CONTROL
MODEL NO.: TX3312S
Approval Holder: AutoMicro Technology Inc.
Test Site / Operator: ETS / PIERCE PENG
Temperature/Voltage: Temp.: 23°C/ Unom.: 12 VDC (battery)
Test Specification: according to Section15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 193.868MHz, Emax: 25.27dB μ V/m, RBW: 100kHz

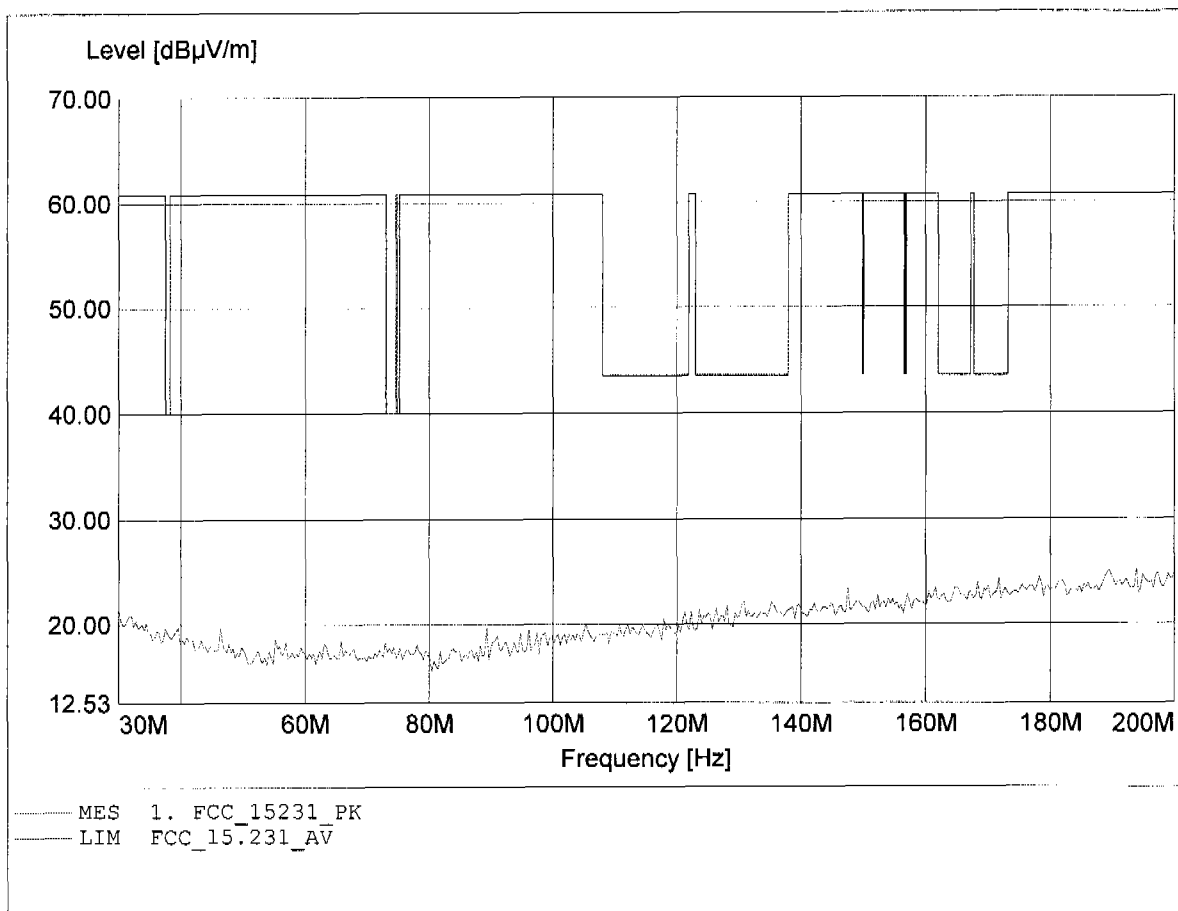

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: REMOTE CONTROL
MODEL NO.: TX3312S
Approval Holder: AutoMicro Technology Inc.
Test Site / Operator: ETS / PIERCE PENG
Temperature/Voltage: Temp.: 23°C/ Unom.: 12 VDC (battery)
Test Specification: according to Section 15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 199.319MHz, Emax: 25.91dBµV/m, RBW: 100kHz

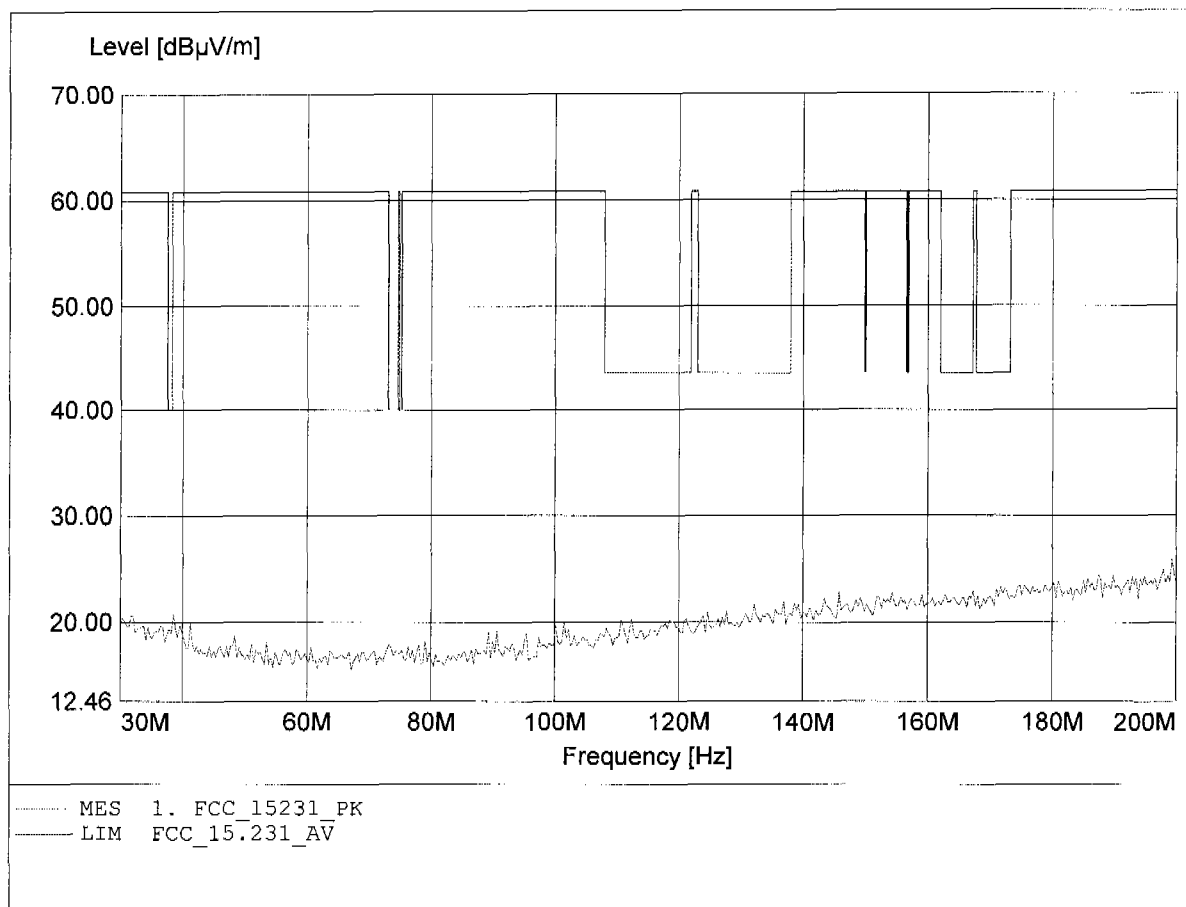

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: REMOTE CONTROL
MODEL NO.: TX3312S
Approval Holder: AutoMicro Technology Inc.
Test Site / Operator: ETS / PIERCE PENG
Temperature/Voltage: Temp.: 23°C/ Unom.: 12 VDC (battery)
Test Specification: according to Section 15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Freq: 434.068MHz, Emax: 76.58dBµV/m, RBW: 100kHz

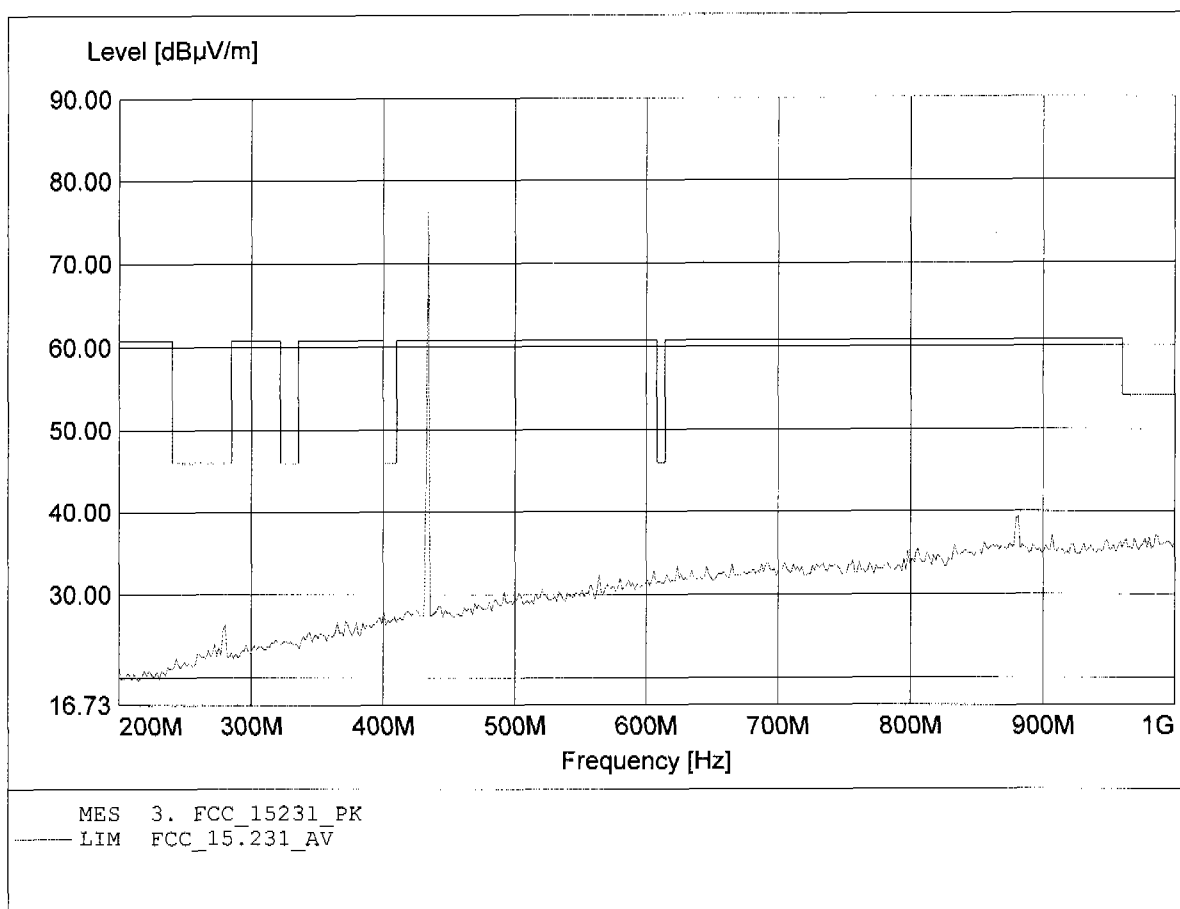

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: REMOTE CONTROL
MODEL NO.: TX3312S
Approval Holder: AutoMicro Technology Inc.
Test Site / Operator: ETS / PIERCE PENG
Temperature/Voltage: Temp.: 23°C/ Unom.: 12 VDC (battery)
Test Specification: according to Section 15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Freq: 434.068MHz, Emax: 78.97dBµV/m, RBW: 100kHz

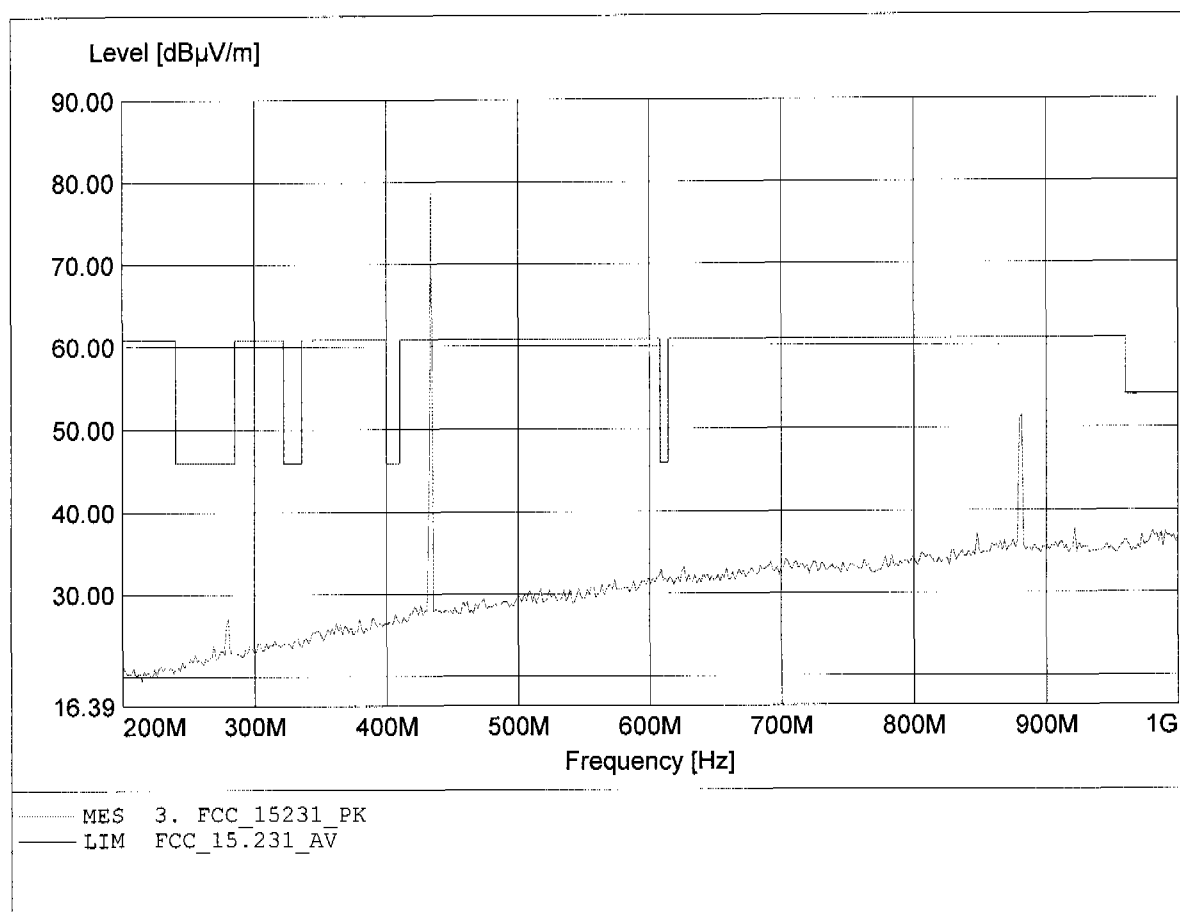

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: REMOTE CONTROL
MODEL NO.: TX3312S
Approval Holder: AutoMicro Technology Inc.
Test Site / Operator: ETS / PIERCE PENG
Temperature/Voltage: Temp.: 23°C/ Unom.: 12 VDC (battery)
Test Specification: according to Section 15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.605GHz, Emax: 48.22dBµV/m, RBW: 1MHz

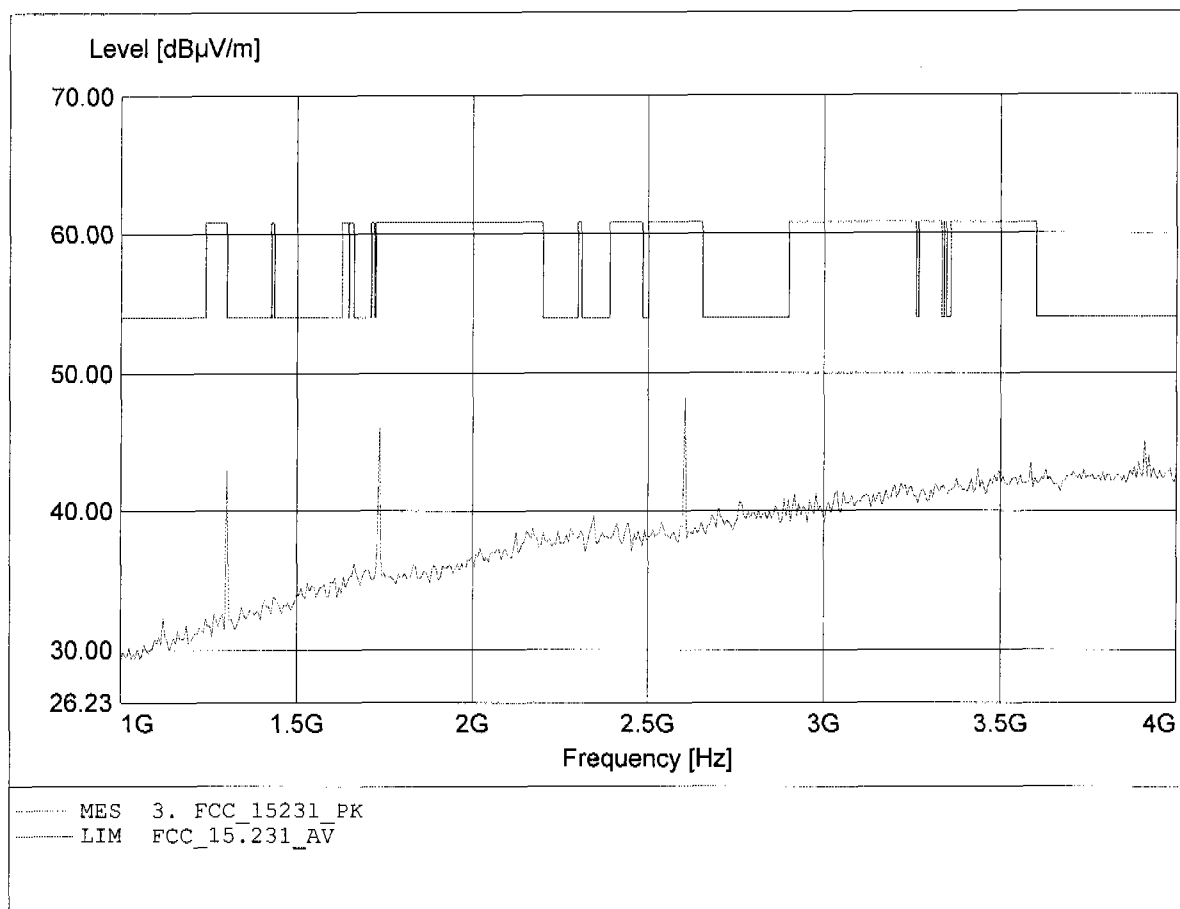

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: REMOTE CONTROL
MODEL NO.: TX3312S
Approval Holder: AutoMicro Technology Inc.
Test Site / Operator: ETS / PIERCE PENG
Temperature/Voltage: Temp.: 23°C/ Unom.: 12 VDC (battery)
Test Specification: according to Section 15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 1.733GHz, Emax: 58.15dBμV/m, RBW: 1MHz

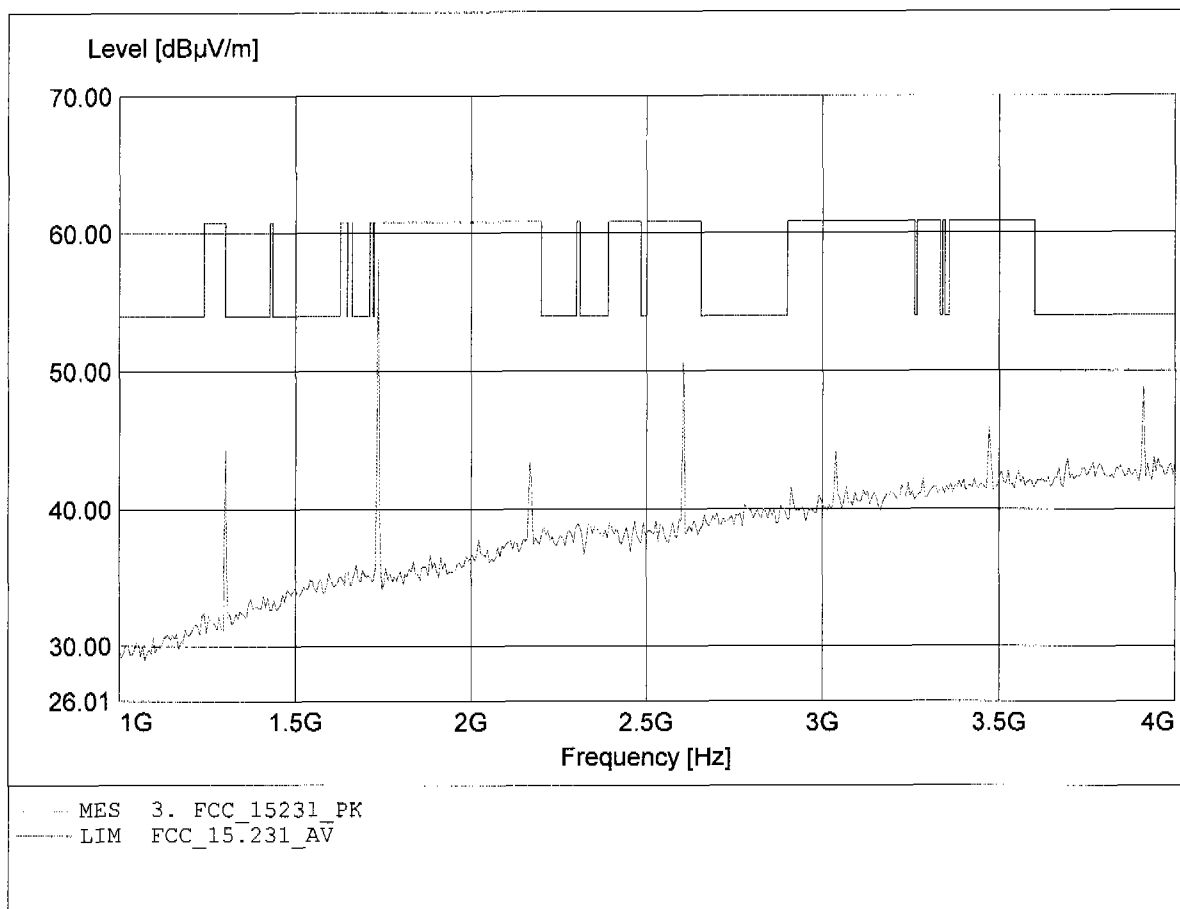

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


EUT: REMOTE CONTROL
MODEL NO.: TX3312S
Approval Holder: AutoMicro Technology Inc.
Test Site / Operator: ETS / PIERCE PENG
Temperature/Voltage: Temp.: 23°C/ Unom.: 12 VDC (battery)
Test Specification: according to Section 15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.263GHz, Emax: 42.56dBuV/m, RBW: 1MHz

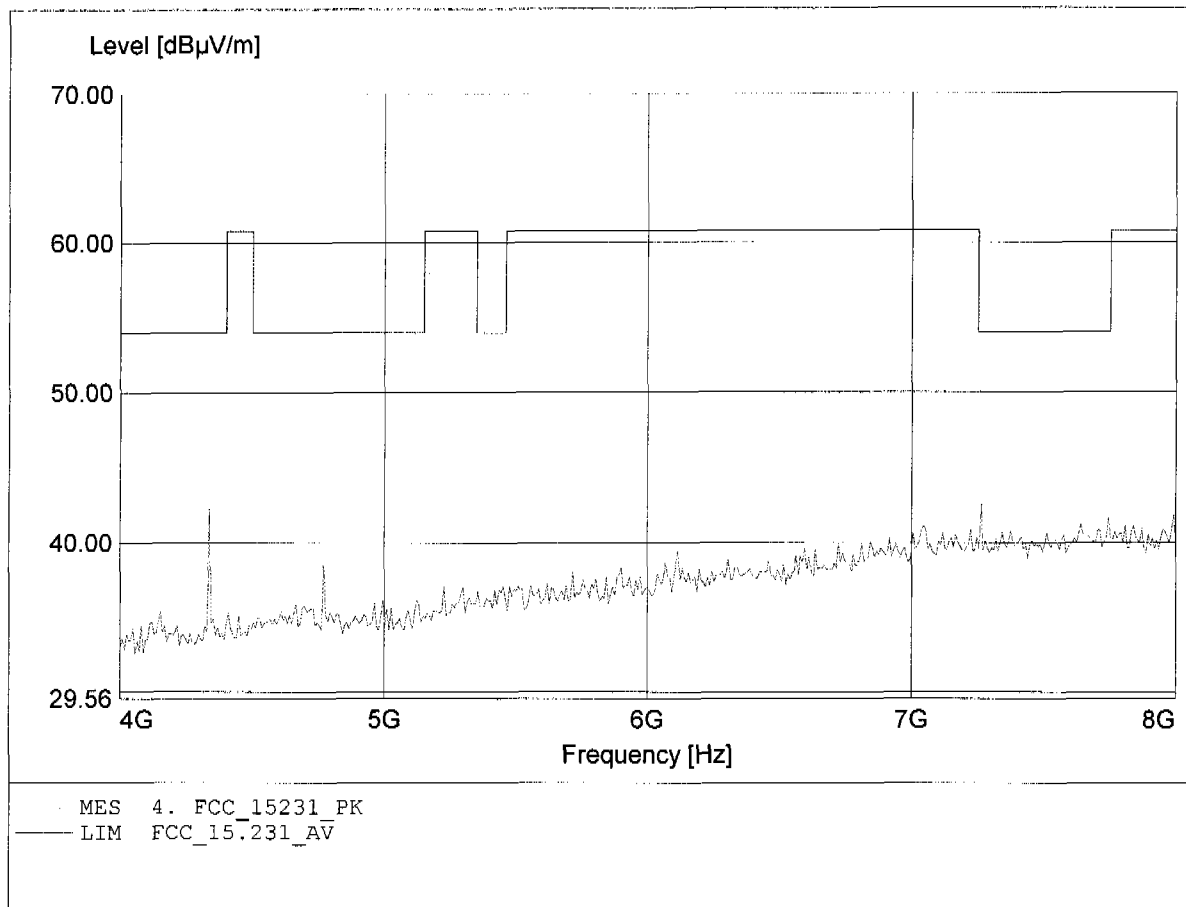

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

EUT: REMOTE CONTROL
MODEL NO.: TX3312S
Approval Holder: AutoMicro Technology Inc.
Test Site / Operator: ETS / PIERCE PENG
Temperature/Voltage: Temp.: 23°C/ Unom.: 12 VDC (battery)
Test Specification: according to Section 15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 4.337GHz, Emax: 47.95dBμV/m, RBW: 1MHz

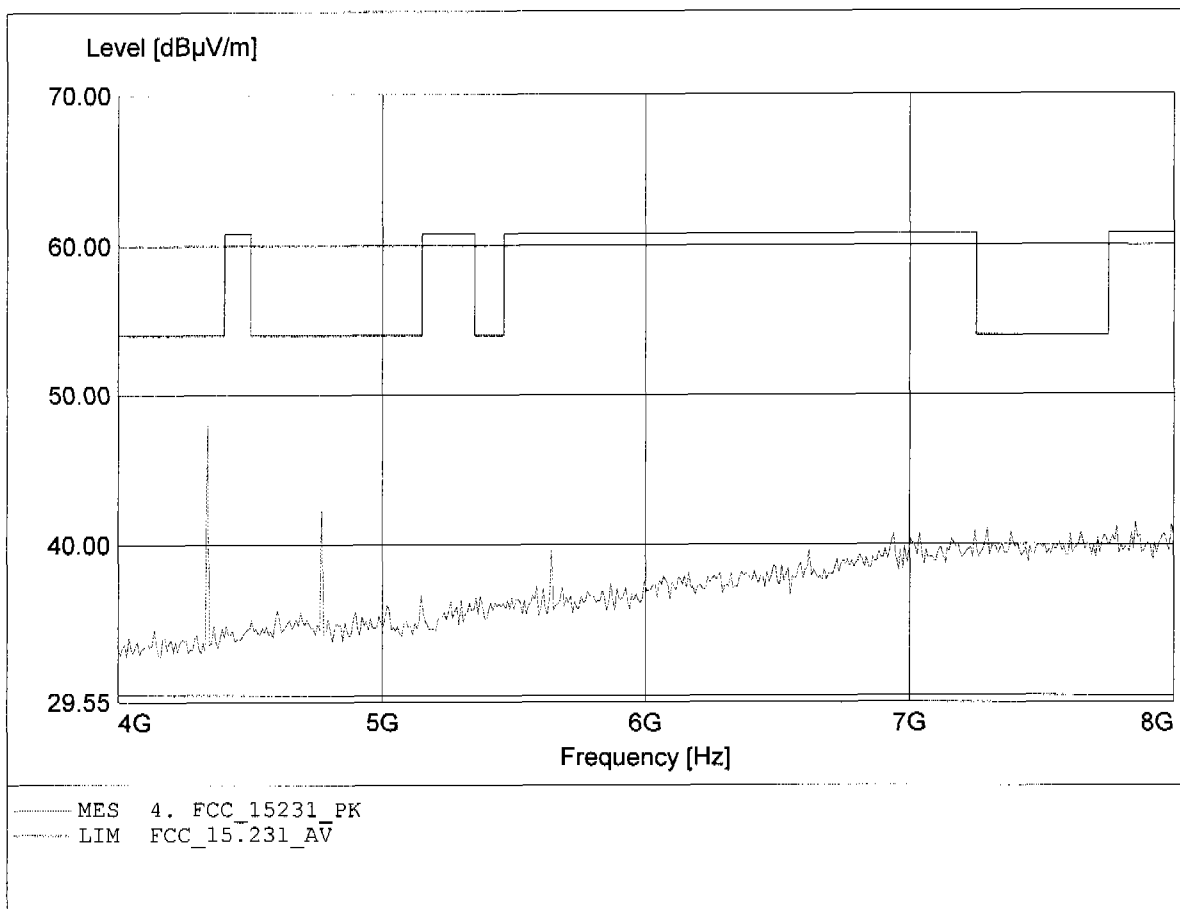


Appendix D

Bandwidth



Marker 1 [T1 ndB] RBW 100 kHz RF Att 40 dB
Ref Lvl ndB 20.00 dB VBW 100 kHz
117 dBV BW 447.42610220 kHz SWT 20 ms Unit dBV

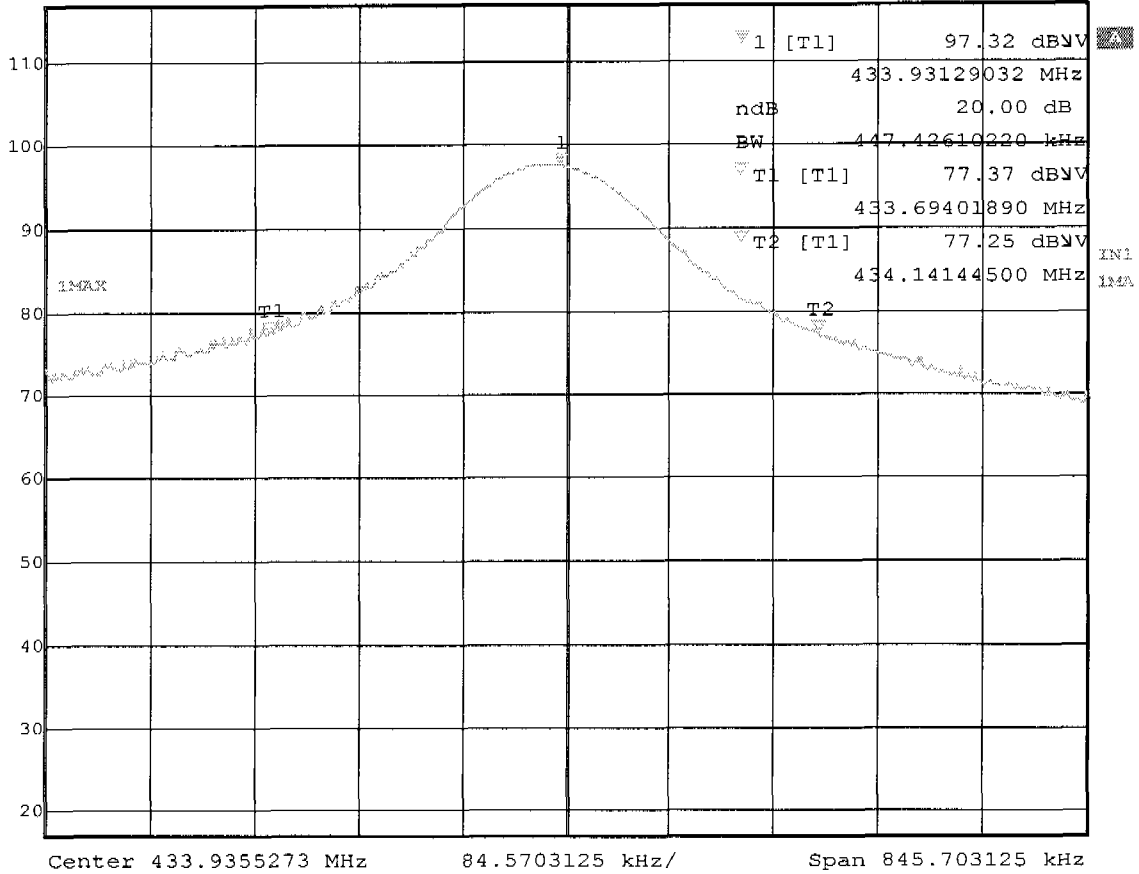

Title: bandwidth
Date: 12.JAN.2004 18:38:31

Appendix E

Spurious Emissions radiated, Receiving

Appendix F

Conducted Measurement at (AC) Power Line