



FCC PART 15.247

MEASUREMENT AND TEST REPORT

For

Hobbico, Inc.

2904 Research Road, Champaign, Illinois 61826, USA

FCC ID: IYFTTX404B

Report Type: Original Report	Product Type: 2.4 GHz FHSS TRANSMITTER
Test Engineer: <u>Leon Chen</u> <i>leon chen</i>	
Report Number: <u>RSZ10110514</u>	
Report Date: <u>2010-12-22</u>	
Reviewed By: <u>Merry Zhao</u> <i>Merry Zhao</i> <u>EMC Engineer</u>	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
STANDARD APPLICABLE	9
TEST DATA	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP	11
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST PROCEDURE	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	12
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	17
APPLICABLE STANDARD	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST PROCEDURE	17
TEST DATA	17
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING.....	20
APPLICABLE STANDARD	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST PROCEDURE	20
TEST DATA	20
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	23
APPLICABLE STANDARD	23

TEST EQUIPMENT LIST AND DETAILS.....	23
TEST PROCEDURE	23
TEST DATA	23
FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....	25
APPLICABLE STANDARD	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST PROCEDURE	25
TEST DATA	25
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	28
APPLICABLE STANDARD	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST PROCEDURE	28
TEST DATA	28
FCC §15.247(d) - BAND EDGES TESTING	31
APPLICABLE STANDARD	31
TEST EQUIPMENT LIST AND DETAILS.....	31
TEST PROCEDURE	31
TEST DATA	32
PRODUCT SIMILARITY DECLARATION LETTER	34

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Hobbico, Inc.* 's product, model number: *TTX404 mode 1 and TTX404 mode 2 (FCC ID: IYFTTX404B)* or the "EUT" as referred to in this report is a *2.4GHz FHSS TRANSMITTER*, which measures approximately: 18.8 cm (L) x 6.7 cm (W) x 21.2 cm (H), rated input voltage: DC 6.0 V battery.

Frequency Range: 2403-2480 MHz (TX/RX)

Modulation Mode: FHSS

Transmitter Output Power: ≤ 20 dBm

Note: The model *TTX404 mode 1 and TTX404 mode 2*, they are electrically identical, only button placement is different, which were explained in the attached declaration letter.

All measurement and test data in this report was gathered from production sample serial number: 1011029 (Assigned by BACL, Shenzhen). The EUT was received on 2010-11-05.

Objective

This Type approval report is prepared on behalf of *Hobbico, Inc* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

N/A

Equipment Modifications

No modification was made to the unit tested.


Local Support Equipment List and Details

N/A


External I/O Cable

N/A

Configuration of Test Setup



Block Diagram of Test Setup

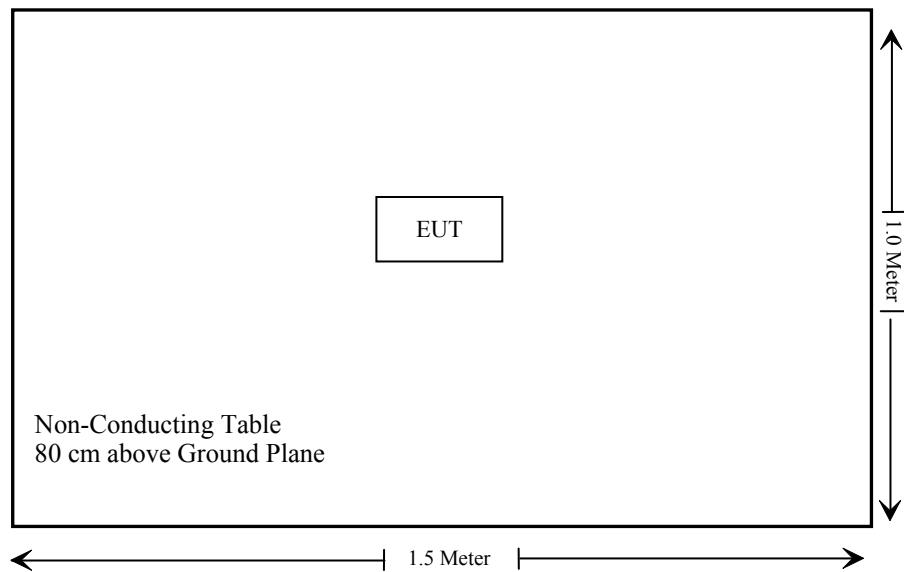

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b)(1), §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	N/A
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Standard Applicable

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mw/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Test Data

Predication of MPE limit at a given distance

$$S = PG/4\pi R^2$$

Where:

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally **numeric** gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Maximum peak output power at antenna input terminal: 16.75 (dBm)

Maximum peak output power at antenna input terminal: 47.30(mW)

Predication distance: >20 (cm)

Predication frequency: 2403 (MHz)

Antenna Gain (typical): 2 (dBi)

Maximum Antenna Gain: 1.58 (numeric)

The worst case is power density at predication frequency at 20 cm: 0.015 (mW/cm²)

MPE limit for general population exposure at predication frequency: 1.0 (mW/cm²)

Result:

The predicted power density level at 20 cm is 0.015 mw/cm² which is below the uncontrolled exposure limit of 1.0 mw/cm². The EUT is used at least 20 cm away from user's body. It is determined as mobile equipment and complies with the MPE limit.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a integral antennas, the gain is 2.0 dBi, which in accordance to section 15.203, please refer to the internal photos.

Result: Compliance.

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB (k=2, 95% level of confidence).

EUT Setup

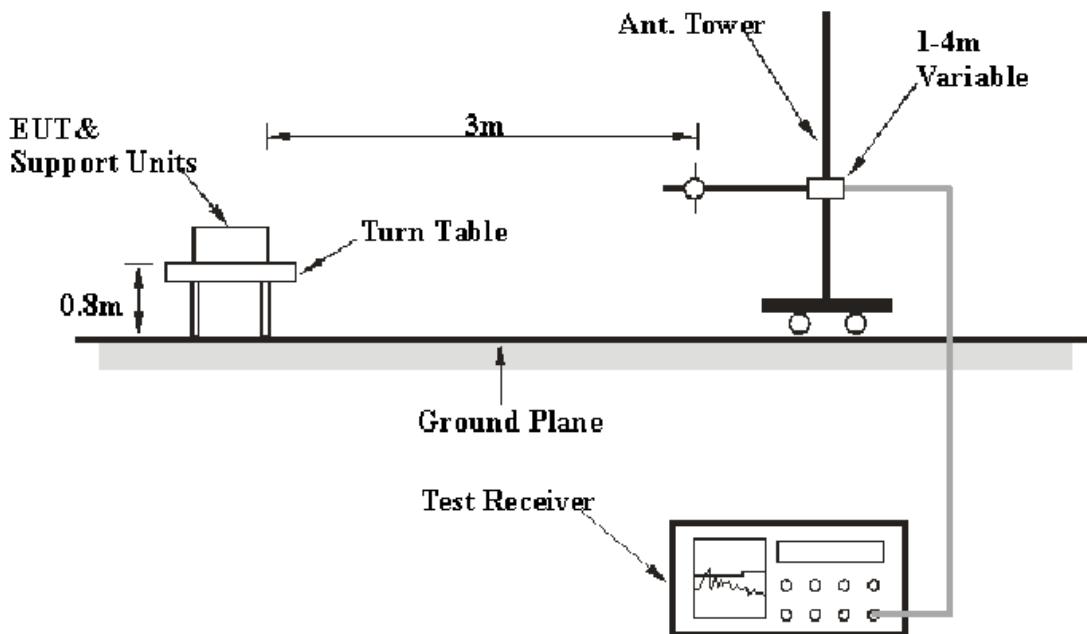

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<u>Frequency Range</u>	<u>RBW</u>	<u>Video B/W</u>
30MHz – 1000 MHz	100 kHz	300 kHz
1000 MHz – 25 GHz	1 MHz	3 MHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2010-08-02	2011-08-02
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2010-03-11	2011-03-11
HP	Amplifier	8449B	3008A00277	2010-09-12	2011-09-11
Sunol Sciences	Horn Antenna	DRH-118	A052604	2010-05-05	2011-05-04
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2010-07-08	2011-07-08

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz and peak and Average detection modes for frequencies above 1GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

30 -1000 MHz:

5.5 dB at 907.195750 MHz in the **Horizontal** polarization

Above 1 GHz:

1.34 dB at 2390 MHz in the **Horizontal** polarization

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa


The testing was performed by Leon Chen on 2010-12-06.

30-1000 MHz:*Test Mode: Transmitting***Model 1:**

Auto Test(FCC 15.209)

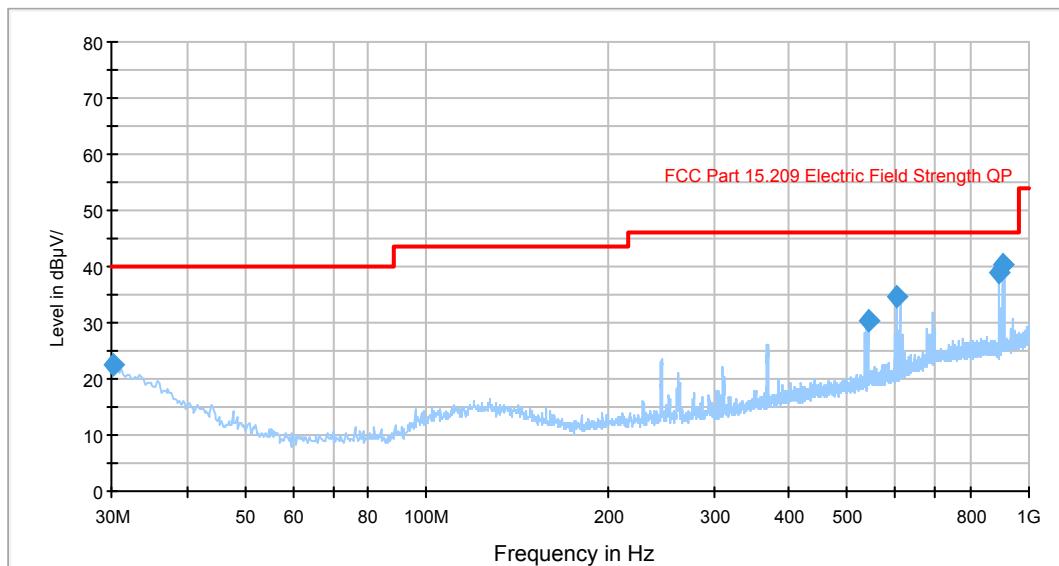

Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Ant. Height (cm)	Ant. Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB)	Limit (dB μ V/m)	Margin (dB)
907.195750	40.5	166.0	H	230.0	-0.6	46.0	5.5
891.355000	38.9	304.0	H	185.0	-1.2	46.0	7.1
604.782500	34.7	100.0	V	247.0	-6.4	46.0	11.3
540.121250	30.2	100.0	V	294.0	-7.7	46.0	15.8
30.203631	22.5	400.0	H	131.0	-5.5	40.0	17.5

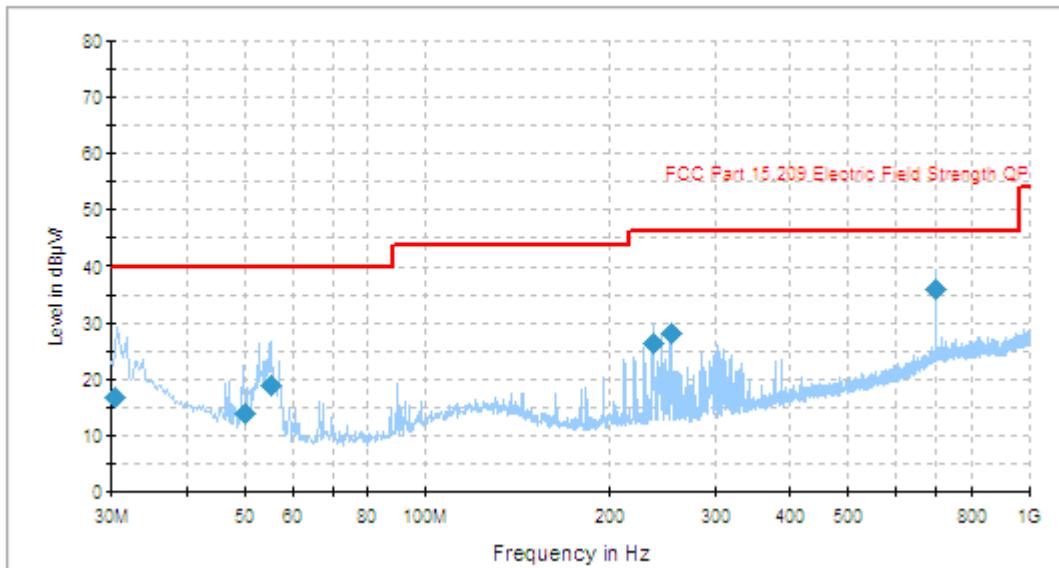Model 2:

Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Ant. Height (cm)	Ant. Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB)	Limit (dB μ V/m)	Margin (dB)
253.171750	28.1	100.0	H	162.0	-13.4	46.0	17.9
236.541750	26.4	133.0	H	331.0	-13.7	46.0	19.6
30.561750	16.7	201.0	H	8.0	-5.8	40.0	23.3
55.387000	18.9	100.0	V	322.0	-18.1	40.0	30.1
50.117000	14.1	117.0	V	329.0	-17.3	40.0	33.9

Above 1 GHz:

Indicated		Detector (PK/Ave)	Table Angle Degree	Test Antenna		Correction Factor			FCC Part 15.247/15.209			
Frequency (MHz)	S.A. Reading (dB μ V)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Comment
Low Channel												
4806	57.76	PK	352	1.5	H	36.3	4.3	26.81	71.55	74	2.45*	harmonic
4806	58.78	PK	342	1.1	V	33.8	4.3	26.81	70.07	74	3.93*	harmonic
4806	39.13	Ave	342	1.1	V	33.8	4.3	26.81	50.42	54	3.58*	harmonic
4806	36.53	Ave	352	1.5	H	36.3	4.3	26.81	50.32	54	3.68*	harmonic
Middle Channel												
4882	58.05	PK	11	1.4	H	36.3	4.37	26.78	71.94	74	2.06**	harmonic
4882	59.07	PK	11	1.4	V	33.8	4.37	26.78	70.46	74	3.54*	harmonic
4882	37.03	Ave	11	1.4	H	36.3	4.37	26.78	50.92	54	3.08*	harmonic
4882	39.16	Ave	11	1.4	V	33.8	4.37	26.78	50.55	54	3.45*	harmonic
High Channel												
4960	57.69	PK	32	2	H	36.3	4.41	26.75	71.65	74	2.35*	harmonic
4960	58.34	PK	27	1.8	V	33.8	4.41	26.75	69.80	74	4.20	harmonic
4960	36.68	Ave	32	2	H	36.3	4.41	26.75	50.64	54	3.36*	harmonic
4960	37.52	Ave	27	1.8	V	33.8	4.41	26.75	48.98	54	5.02	harmonic

* Within measurement uncertainty.

Spurious emission in restricted band:

Indicated		Detector (PK/Ave)	Table Angle Degree	Test Antenna		Correction Factor			FCC Part 15.247/15.209			
Frequency (MHz)	S.A. Reading (dB μ V)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Comment
2390	37.26	PK	48	1.2	H	30.6	3.03	0	70.89	74	3.11*	spurious
2483.5	36.67	PK	176	1.7	H	30.6	3.18	0	70.45	74	3.55*	spurious
2483.5	36.77	PK	295	1.5	V	30.4	3.18	0	70.35	74	3.65*	spurious
2390	35.15	PK	235	1.5	V	30.4	3.03	0	68.58	74	5.42	spurious
2390	19.03	Ave	48	1.2	H	30.6	3.03	0	52.66	54	1.34*	spurious
2483.5	17.82	Ave	176	1.7	H	30.6	3.18	0	51.60	54	2.40*	spurious
2483.5	17.49	Ave	295	1.5	V	30.4	3.18	0	51.07	54	2.93*	spurious
2390	16.36	Ave	235	1.5	V	30.4	3.03	0	49.79	54	4.21	spurious

* Within measurement uncertainty.

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

* The testing was performed by Leon Chen on 2010-12-14.


Test Result: Compliant.



Please refer to following tables and plots

Test Mode: Transmitting

Channel	Channel Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low Channel	2403	5.008	0.576	Pass
Adjacent Channel	2408			
Mid Channel	2441	6.016	0.492	Pass
Adjacent Channel	2447			
High Channel	2480	6.016	0.376	Pass
Adjacent Channel	2474			

Please refer to the following plots.

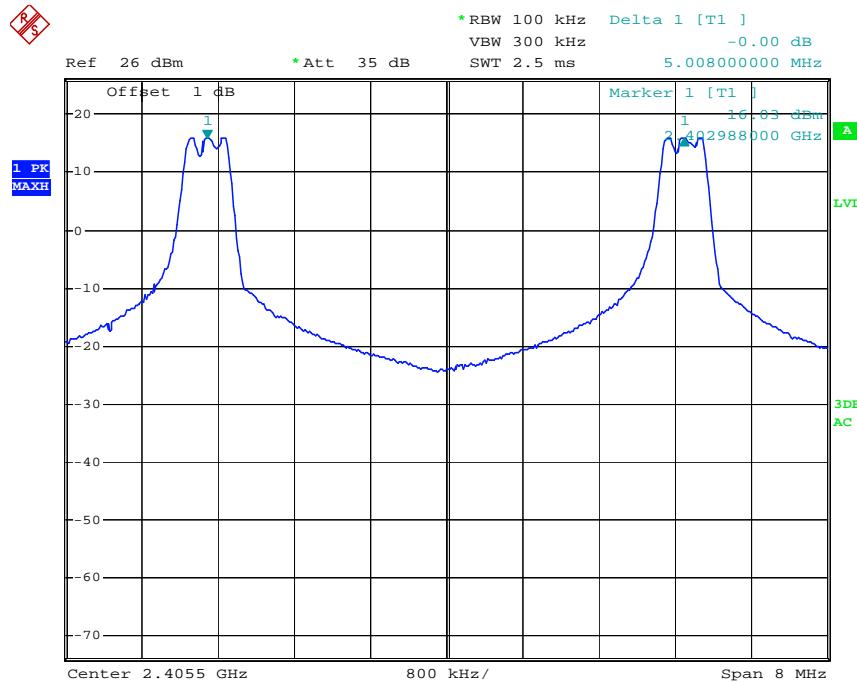Low Channel

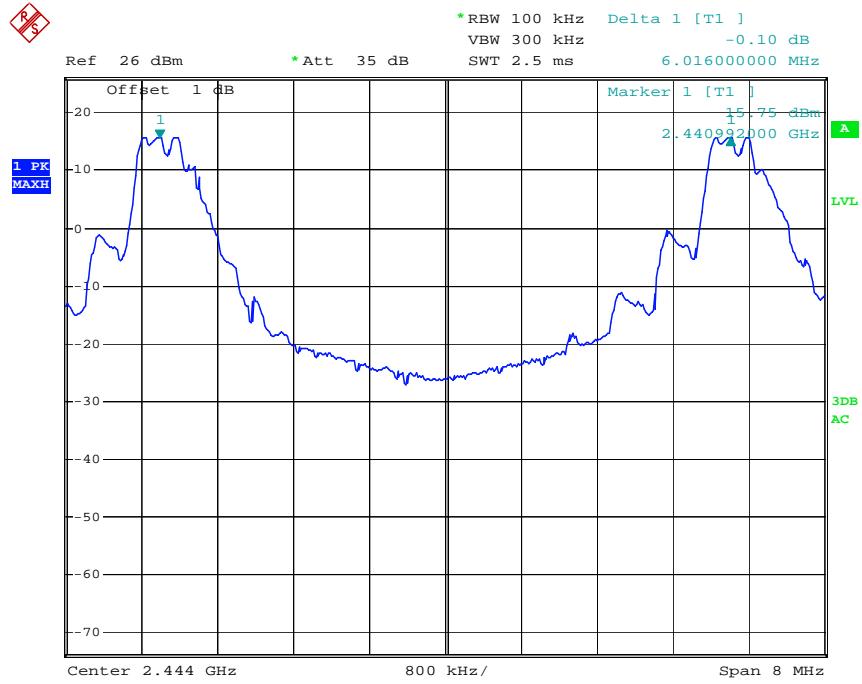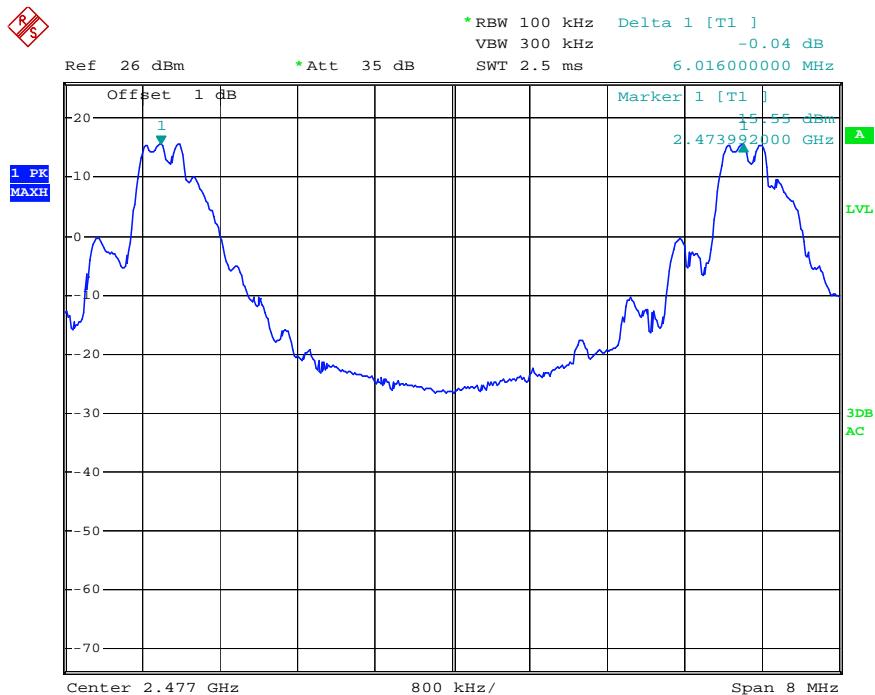Middle Channel**High Channel**

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

* The testing was performed by Leon Chen on 2010-12-08.

Test Result: Compliance.


Please refer to following tables and plots



Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2403	0.864
Middle	2441	0.738
High	2480	0.564

Please refer to the following plots.

Low Channel

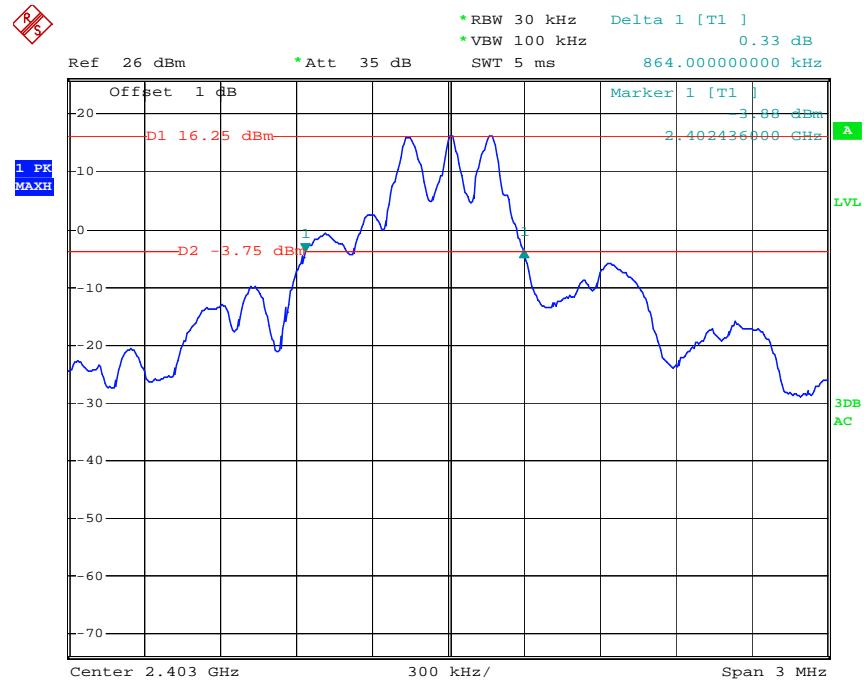

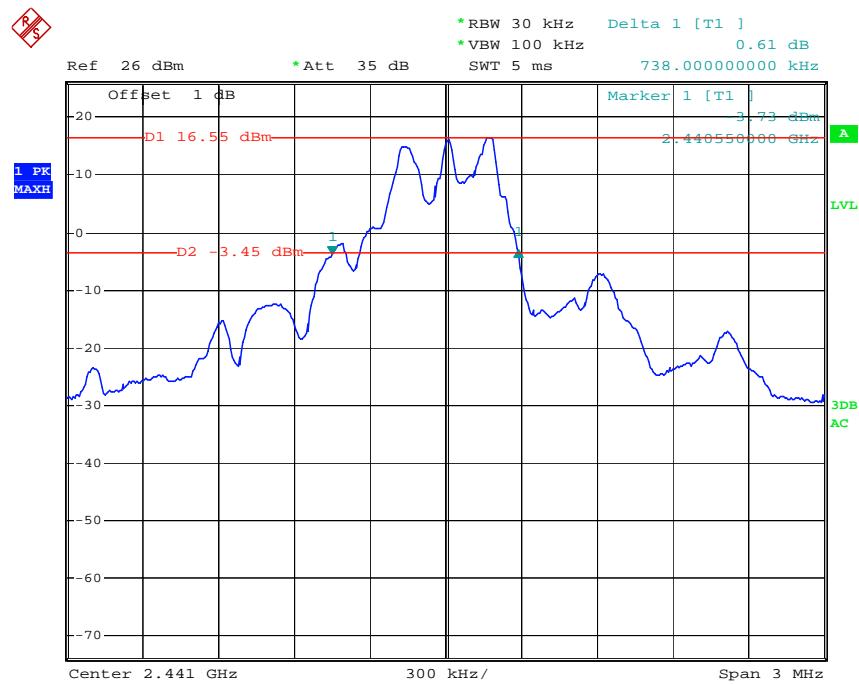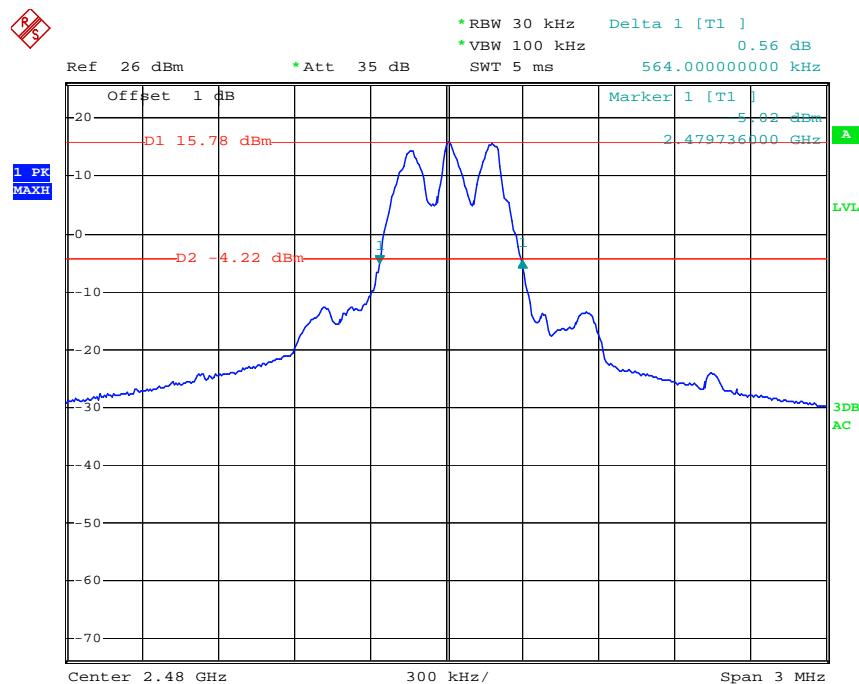Middle Channel**High Channel**

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10
HP	Amplifier	8449B	3008A00277	2010-09-12	2011-09-11
Sunol Sciences	Horn Antenna	DRH-118	A052604	2010-05-05	2011-05-04
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2010-07-08	2011-07-08

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

The testing was performed by Leon Chen on 2010-12-08.


Test Result: Compliant.

Please refer to following tables and plots

Test Mode: Transmitting

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	15	≥ 15

Number of Hopping Channels

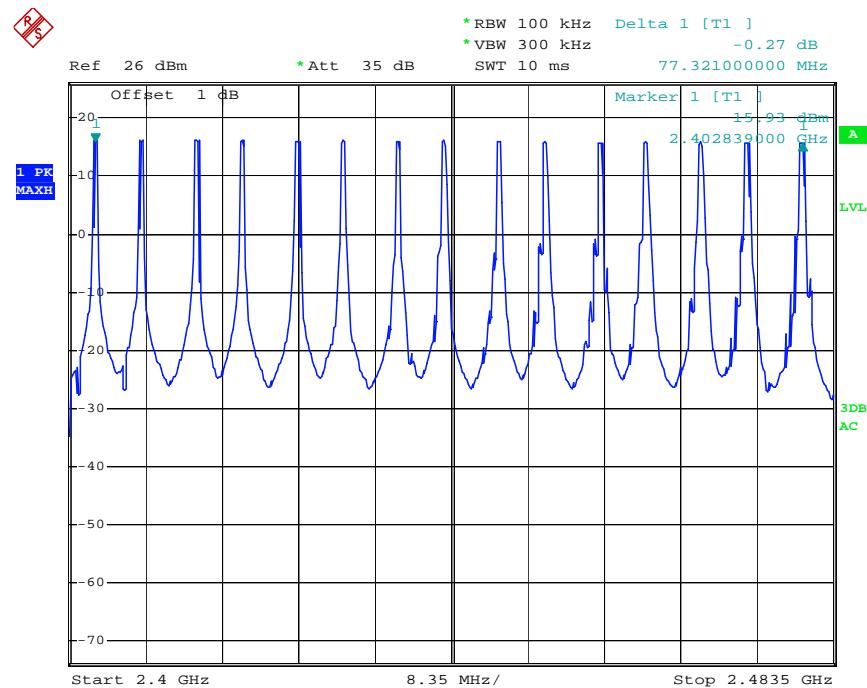

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length * hop rate/ number of hopping channels * 31.6s

Hop rate=1600/s

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

* The testing was performed by Leon Chen on 2010-12-09.


Test Result: Compliance.



Please refer to following tables and plots

Test Mode: Transmitting

Channel	Pulse wide (msec)	Dwell time (sec)	Limit (sec)	Result
Low	1.44	0.032	0.4	Pass
Mid	1.44	0.032	0.4	Pass
High	1.44	0.032	0.4	Pass
Note: Dwell time = Pulse time*(56/1/15)*(15*0.4) S				

Please refer to the following plots.

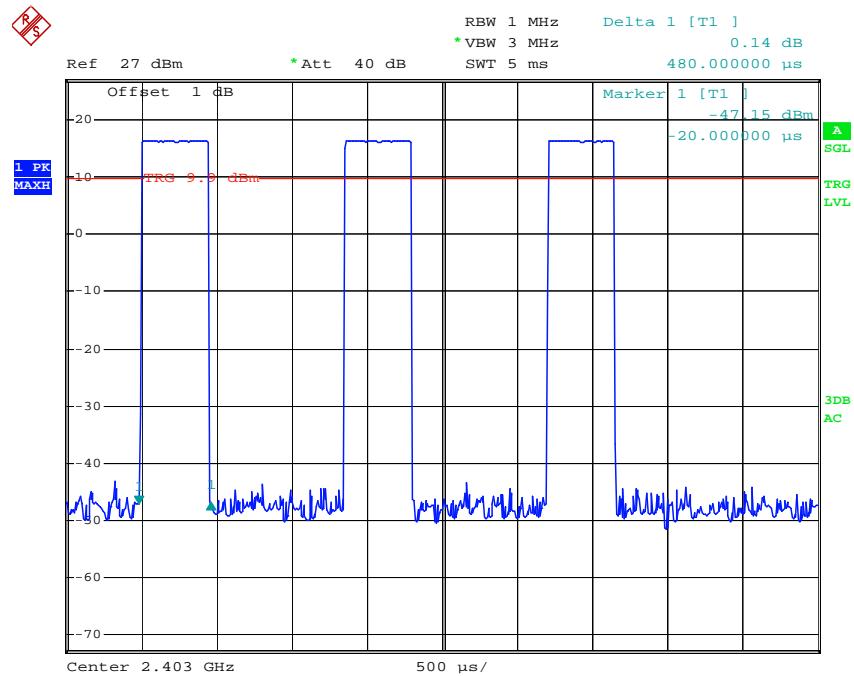Low Channel

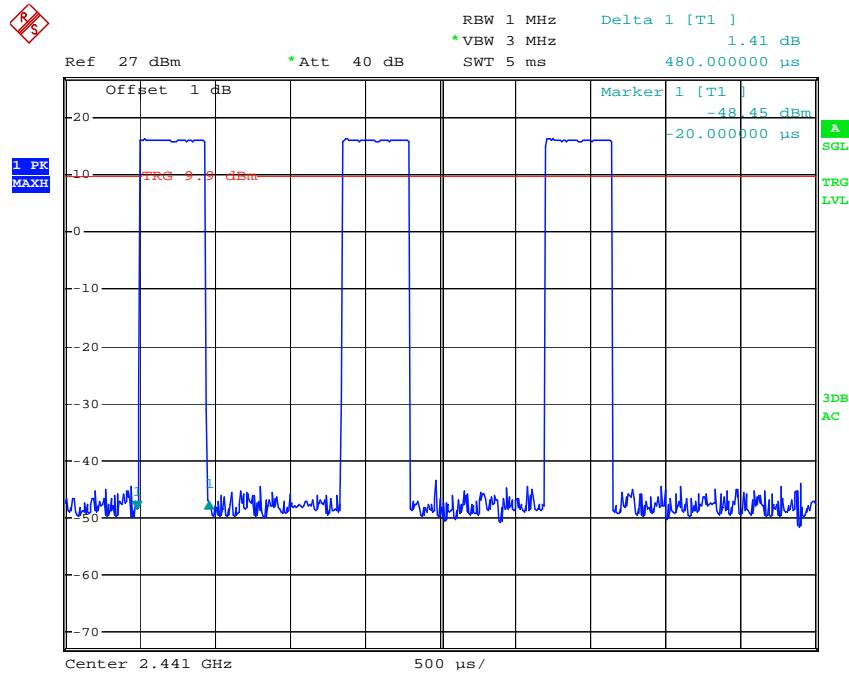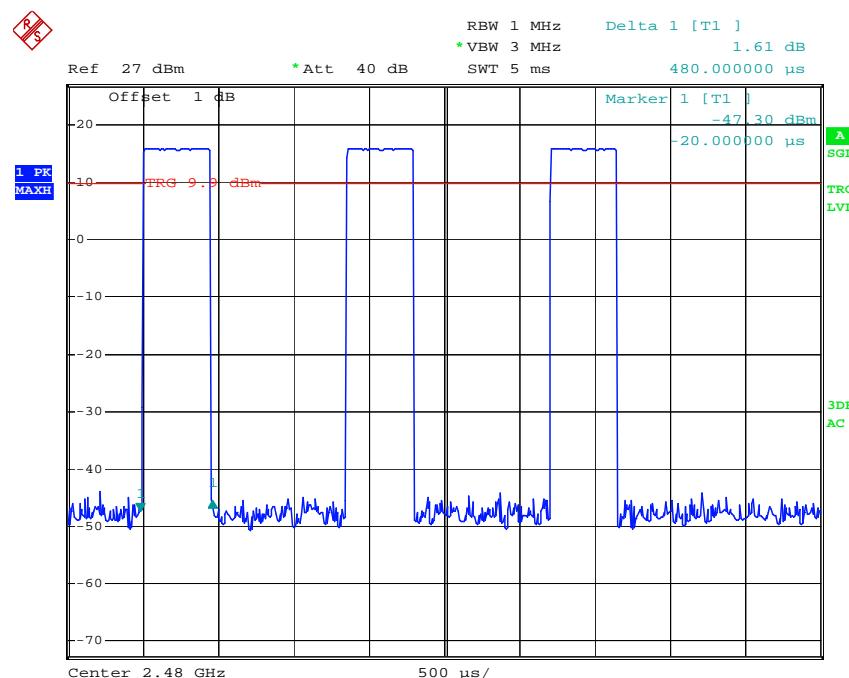Middle Channel**High Channel**

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The antenna was integrated; radiated test method will be applied.

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa


** The testing was performed by Leon Chen on 2010-12-09.*

Test Result: Compliance.


Test Mode: Transmitting

Channel	Channel Frequency (MHz)	Reading power (dBm)	Power output (mW)	Limit (mW)
Low	2403	16.75	47.3	125
Middle	2441	16.46	44.3	125
High	2480	16.12	40.9	125


Note: The data above was tested in conducted mode.

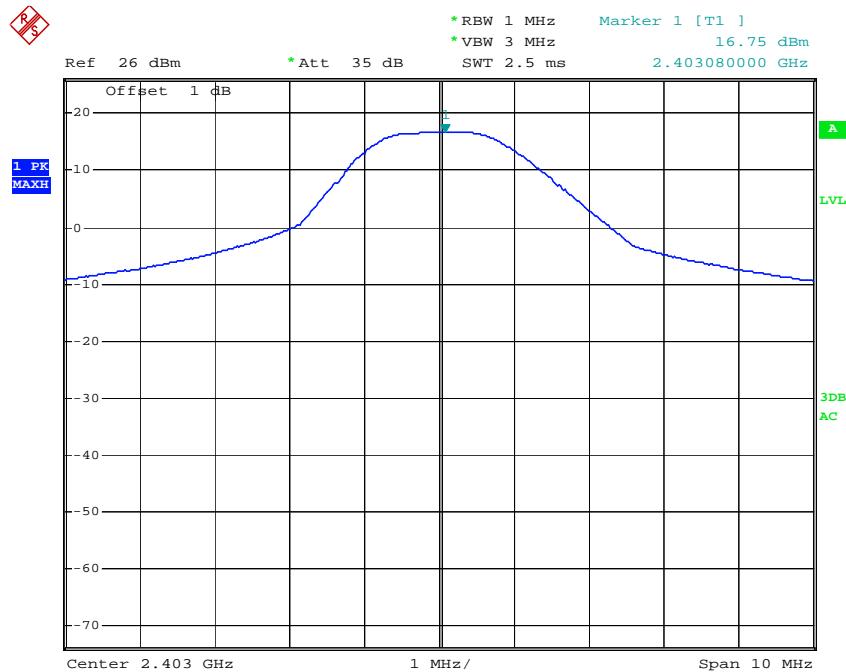Low Channel

Middle Channel

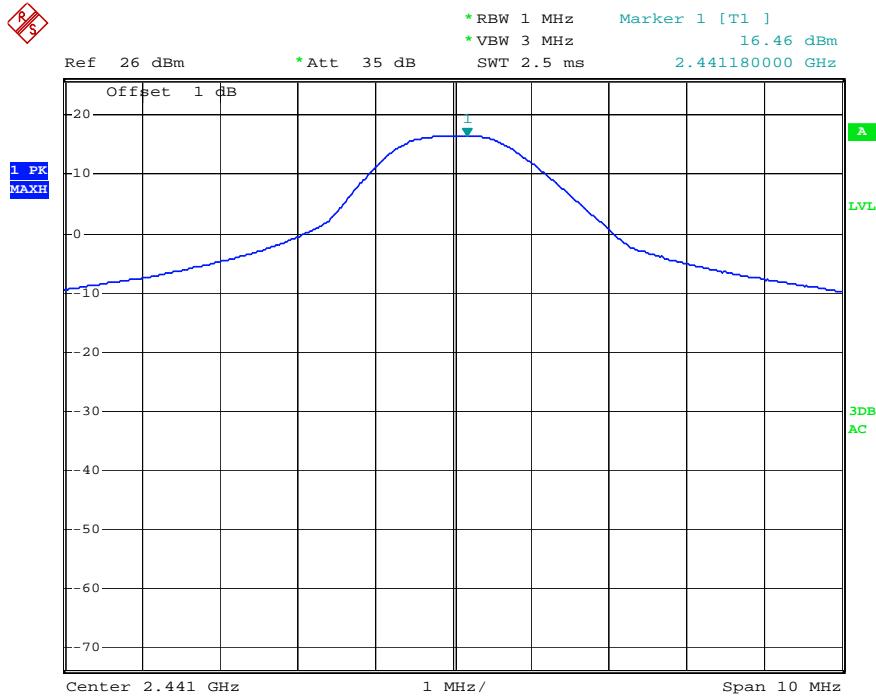

High Channel

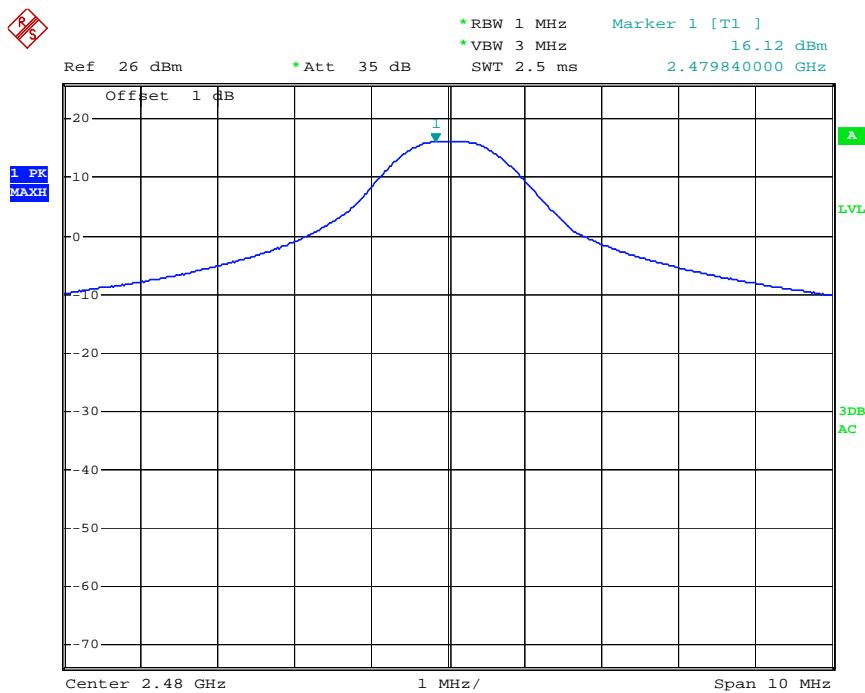

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-24	2010-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

*The testing was performed by Leon Chen on 2010-12-06.

Test Result: Compliant


Test Mode: Transmitting

Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)
2399.200	-51.80	20
2483.600	-54.14	20


Note: The point fall into the stricted band was in FCC 15.209, please refer to the restrict band testing.

Please refer to follow plots:

Band Edge: Left Side

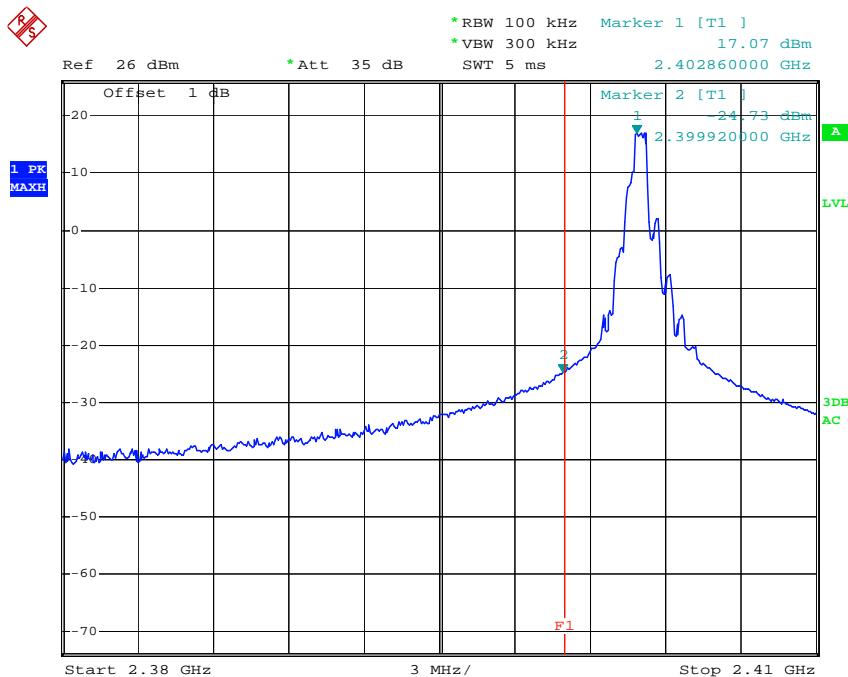

Band Edge: Right Side

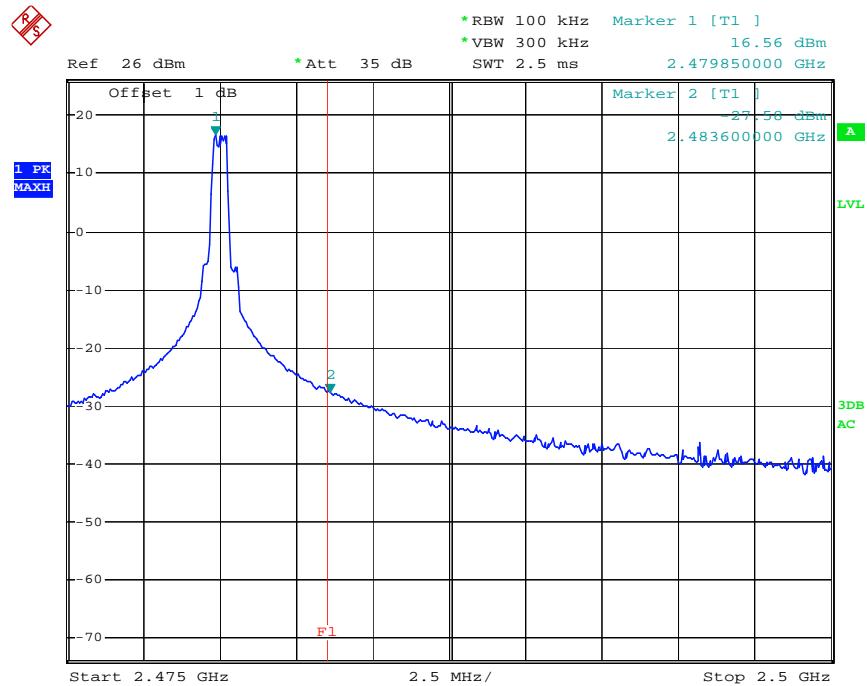

PRODUCT SIMILARITY DECLARATION LETTER

Hobbico, Inc.

Add :2904 Research Road Champaign, Illinois, USA

Tel:001- 217-398-3630

Fax:001-217-398-0008

Product Similarity Declaration

We, **Hobbico Inc**, authorize Bay Area Compliance Laboratories Corp. do test for our 2.4G radio control system: TTX404 mode1 and mode2; and for our business requirement, we declare that for this product we have made some hardware change. the differences between TTX404 mode1 and TTX404 mode2 details as below.

1 Appearance

TTX404 mode1

- a. Throttle stick and its trim lever on the right.
- b. Trainer switch on the right (over the throttle stick)
- c. Elevator stick and its trim lever on the left

TTX404 mode2

- a. Throttle stick and its trim lever on the left
- b. Trainer switch on the left (over the throttle stick)
- c. Elevator stick and its trim lever on the right

2 PCB

The element position corresponding have a little change.

Please help to deal with it ,and let me know if you have any question.



Signature:

Contact Person: ZHENMIN ZHOU

Title: Product Development

Company: Hobbico, Inc.

***** END OF REPORT *****