



LEXMARK INTERNATIONAL

TEST REPORT

for

**FCC PART 15
INDUSTRY CANADA RSS-210**

TRADE NAME: T640rn Laser Printer

MODEL NUMBER: 4061-0R0

Test Report Number: 571-EMC-2006-FCC-080206

Date: August 2, 2006

1 TABLE OF CONTENTS

| | | |
|-----|--|----|
| 1 | TABLE OF CONTENTS | 2 |
| 2 | TECHNICAL REPORT | 3 |
| 2.1 | PURPOSE OF TESTING | 3 |
| 2.2 | APPLIED STANDARDS | 3 |
| 3 | SUMMARY | 4 |
| 4 | DESCRIPTION OF EUT | 5 |
| 4.1 | EUT PHOTOS | 5 |
| 4.2 | EUT ANTENNA | 7 |
| 4.3 | EUT CLOCK FREQUENCIES | 8 |
| 5 | TEST CONFIGURATION | 9 |
| 6 | CABLE INFORMATION | 10 |
| 7 | TESTING & MEASUREMENT EQUIPMENT | 11 |
| 8 | TEST RESULTS | 12 |
| 8.1 | 20 dB BANDWIDTH | 12 |
| 8.2 | HOPPING CHANNEL SEPARATION | 20 |
| 8.3 | NUMBER OF HOPPING CHANNEL FREQUENCIES | 22 |
| 8.4 | AVERAGE TIME OF OCCUPANCY | 24 |
| 8.5 | CONDUCTED POWER | 29 |
| 8.6 | OUT OF BAND EMISSIONS AT ANTENNA TERMINALS | 35 |
| 8.7 | RADIATED SPURIOUS EMISSIONS | 46 |
| 8.8 | CONDUCTED EMISSIONS | 50 |
| 8.9 | MAXIMUM PERMISSIBLE EXPOSURE CALCULATIONS | 53 |

2 TECHNICAL REPORT

| | |
|---|---|
| Manufacturer of Equipment-under-test | Lexmark International, Inc. |
| Address of Manufacturer | 740 New Circle Rd. Lexington, Kentucky 40511 |

| Equipment Under Test | |
|--|--|
| Trade Name(s) | T640rn Laser Printer |
| Model Number | 4061-0R0 |
| FCC ID | IYL4061-0R0 |
| Industry Canada ID | 2376A-40610R0 |
| Device Category | Mobile |
| RF Exposure Category | General Population/Uncontrolled Environment |
| Transmission Modes | EPC Class 0, EPC Class 1, EPC Gen 2, ISO 18000-6b |
| Frequency Range (MHz) | 902.990 - 927.189 |
| Maximum Conducted RF Output Power (dBm) | 26.23 |
| Antenna Type | Cabled from PCB to mounted antenna |
| Antenna Location | Internal to printer |
| Antenna Gain (dBi) | -1 |

2.1 PURPOSE OF TESTING

The purpose of this testing was to evaluate the EUT for compliance to the FCC and Industry Canada Rules for a frequency hopping RFID device operating in the frequency range 902-928 MHz.

2.2 APPLIED STANDARDS

- [1] FCC Part 15 Rules and Regulations
- [2] RSS-210, Issue 6, *Low Power License-Exempt Radiocommunication Devices (All Frequency Bands)*
- [3] RSS-Gen, Issue 1, *General Requirements and Information for the Certification of Radiocommunication Equipment.*

3 SUMMARY

The purpose of this testing was to evaluate the EUT for compliance to the FCC and Industry Canada Rules for a frequency hopping RFID device operating in the frequency range 902-928 MHz. This data demonstrates that the EUT complies with these requirements.

The following is a summary of the testing documented in this report:

| FCC Rules | Description of Test | Result | Page of this Report |
|------------------|---------------------------------|-----------|---------------------|
| §15.247(a)(1) | Hopping channel separation | Compliant | 20 |
| §15.247(a)(1)(i) | Number of hopping channels | Compliant | 22 |
| §15.247(a)(1)(i) | 20 dB bandwidth | Compliant | 12 |
| §15.247(a)(1)(i) | Average time of occupancy | Compliant | 24 |
| §15.247(b)(2) | Peak output power | Compliant | 29 |
| §15.247(d) | Conducted out of band emissions | Compliant | 35 |
| §15.203 | Antenna | Compliant | 7 |
| §15.209 | Radiated emissions | Compliant | 46 |
| §15.207 | Conducted emissions | Compliant | 50 |
| §15.247(i) | RF exposure | Compliant | 53 |

| Industry Canada RSS-210 & RSS-Gen | Description of Test | Result | Page of this Report |
|-----------------------------------|---------------------------------|-----------|---------------------|
| §A8.1(2) [2] | Hopping channel separation | Compliant | 20 |
| §A8.1(3) [2] | Number of hopping channels | Compliant | 22 |
| §A8.1(3) [2] | 20 dB bandwidth | Compliant | 12 |
| §A8.1(3) [2] | Average time of occupancy | Compliant | 24 |
| §A8.4(1) [2] | Peak output power | Compliant | 29 |
| §A8.5 [2] | Conducted out of band emissions | Compliant | 35 |
| §7.1.4 [3] | Antenna | Compliant | 7 |
| §7.2.3.2 [3] | Radiated emissions | Compliant | 46 |
| §7.2.2 [3] | Conducted emissions | Compliant | 50 |
| §5.5 [3] | RF exposure | Compliant | 53 |

This report has been reviewed by:

Keith Hardin

Keith Hardin

August 2, 2006

Name

Signature

Date

4 DESCRIPTION OF EUT

The Equipment Under Test (EUT) is a Lexmark T640n desktop laser printer combined with an integrated RFID reader capable of reading and writing to a variety of passive tags. The laser printer can attach to a personal computer via Universal Serial Bus (USB) or parallel cables and to a wired 10 Mbps or 100 Mbps network. The printer supports a variety of paper options. During testing, an optional output stacker, envelope feeder and 250-sheet drawer were installed. The RFID reader is a ThingMagic Mercury 4e multi-protocol UHF RFID reader.

4.1 EUT PHOTOS



Figure 1. Front view of EUT.



Figure 2. Right view of EUT.



Figure 3. Left view of EUT (plastic side cover removed).



Figure 4. Back view of EUT.

4.2 EUT ANTENNA

The EUT employs a planar antenna internal to the printer, as shown in Figures 5 and 6. A coaxial cable connects the antenna to the RF output port of the transmitter. A MMCX connector is used at the RF output port and a MCX connector is used at the antenna. Removal of or accessing the antenna would require significant disassembly of a portion of the printer, which the user would not be expected to do. The EUT meets the requirement that no antenna other than the one supplied with the EUT can be used.

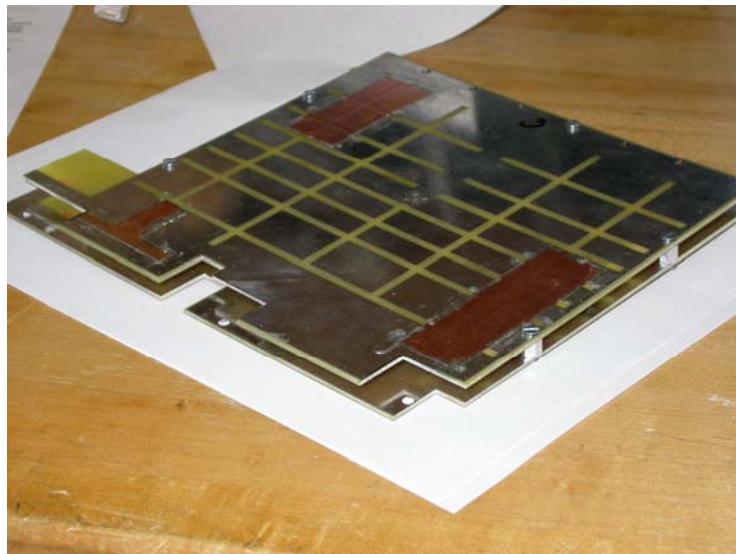


Figure 5. Antenna removed from EUT.

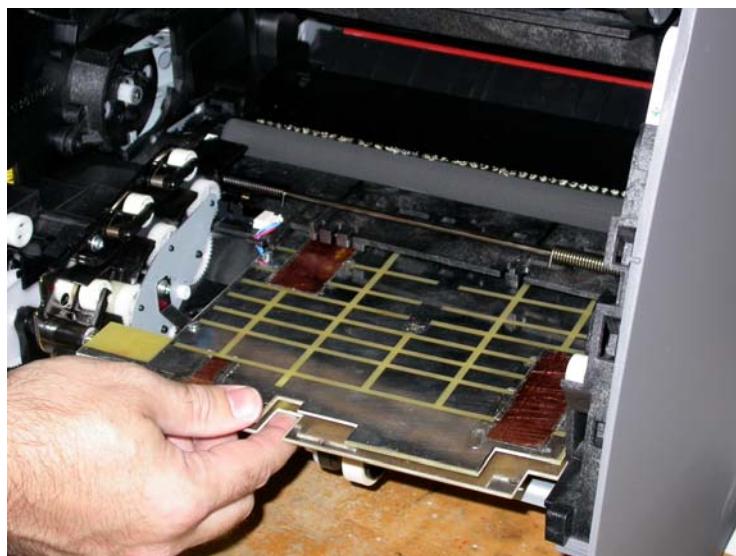



Figure 6. Antenna installation inside EUT.

4.3 EUT CLOCK FREQUENCIES

| Description | Frequency (MHz) |
|---------------------|-----------------|
| PLL Reference clock | 16.0 |
| Internal Clock | 20.0 |

NOTE: These frequencies are only associated with the intentional radiator portion of the EUT.

5 TEST CONFIGURATION

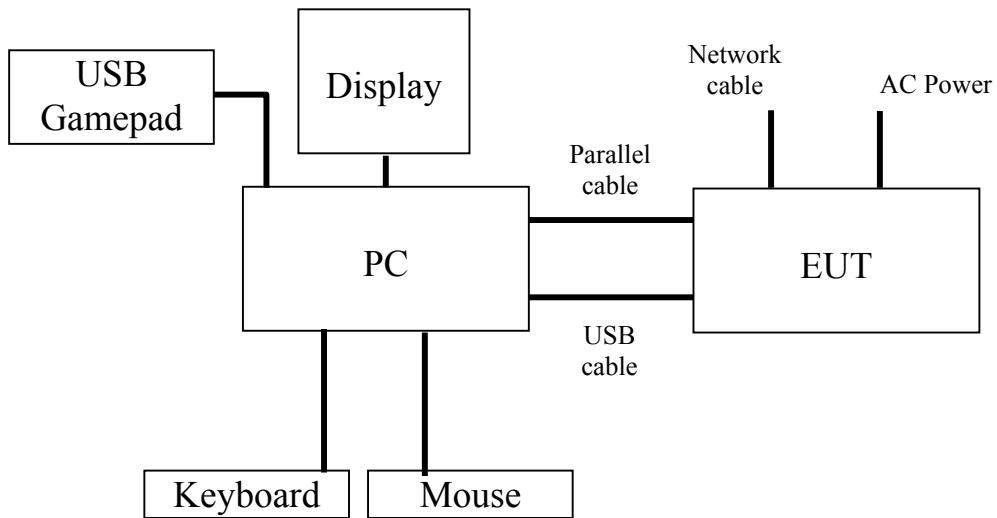

The following auxiliary equipment was used during the testing of the EUT:

| Description | Manufacturer | Model |
|-------------------|--------------|----------------|
| USB Gamepad | Microsoft | Game Pad Pro |
| Personal Computer | Dell | Optiplex GX260 |
| Display | Dell | E173FPb |
| Display | HP | Mx50 |

6 CABLE INFORMATION

Cables used for testing included the following:

| Cable Description | Cable Length (meters) | Ferrites | Shield Status |
|-------------------------------|-----------------------|----------|---------------|
| USB cable from PC to EUT | 2 | No | Shielded |
| Parallel cable from PC to EUT | 3 | No | Shielded |
| PC to LCD display | 2 | Yes | Shielded |
| Network cable to EUT | > 3 | No | Unshielded |
| PC to USB gamepad | 2 | Yes | Shielded |

7 TESTING & MEASUREMENT EQUIPMENT

| Description | Manufacturer | Model Number | Serial Number | Calibration Due Date |
|-------------------------------|------------------|--------------|---------------|---|
| EMI receiver | Rhode & Schwarz | ESI7 | 100009 | 8/10/07 |
| EMI receiver | Rhode & Schwarz | ESIB7 | 100093 | 5/25/07 |
| EMI receiver | Rhode & Schwarz | ESIB40 | 1112950683 | 5/4/08 |
| EMI receiver | Rhode & Schwarz | ESIB40 | 100148 | 5/5/07 |
| Bi-Log antenna | Chase | CBL6111C | 2449 | 9/12/07 |
| Horn antenna (1 - 18 GHz) | Antenna Research | DRG-1181A | 1091 | N/A |
| Horn antenna (18 - 40 GHz) | Antenna Research | DRG1840A | 1047 | N/A |
| Loop antenna (9 kHz - 30 MHz) | Rhode & Schwarz | HFH 2Z2 | 881056/074 | 6/2/07 |
| LISN | Rhode & Schwarz | ESH2-Z5 | 848765/017 | 6/1/07 |
| Signal generator | Rhode & Schwarz | SMR40 | 100150 | Output set & measured using power meter |

8 TEST RESULTS

8.1 20 dB BANDWIDTH

Criteria for 20 dB Bandwidth [1]: For frequency hopping systems operating in the 902-928 MHz band, the maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Test Procedure for 20 dB Bandwidth: The antenna port of the EUT was connected directly to the input of the spectrum analyzer via a short coaxial cable. The resolution and video bandwidths of the analyzer were set to 10 kHz and 30 kHz, respectively. The frequency span was set so that the entire channel of operation could be displayed on the spectrum analyzer. The max hold function was used to capture the maximum levels over this frequency range. Markers and display lines were then used to determine the two frequencies on the upper and lower edge of the channel where the amplitude was 20 dB below the highest amplitude within the channel. The difference in the frequencies of the upper and lower markers represents the 20 dB bandwidth of the channel.

All modes of operation on the highest, lowest and middle channels were measured and are reported. The hopping function was disabled for this testing. Discrete channels were selected as indicated in the test results.

Results for 20 dB Bandwidth: See Table 1 and Figures 7 - 18 for results. The maximum 20 dB bandwidth measured was 436.874 kHz. The EUT met the requirements for 20 dB bandwidth.

| Channel | 20 dB Bandwidth (kHz) | | | | 20 dB Bandwidth Limit (kHz) |
|---------|-----------------------|-------------|----------------|-----------|-----------------------------|
| | EPC Class 0 | EPC Class 1 | EPC Gen2 | ISO 18000 | |
| 1 | 243.487 | 155.311 | 366.733 | 253.507 | 500.00 |
| 26 | 240.481 | 153.307 | 436.874 | 251.503 | 500.00 |
| 53 | 243.487 | 154.309 | 436.874 | 251.503 | 500.00 |

Table 1. Measured data for 20 dB bandwidths.

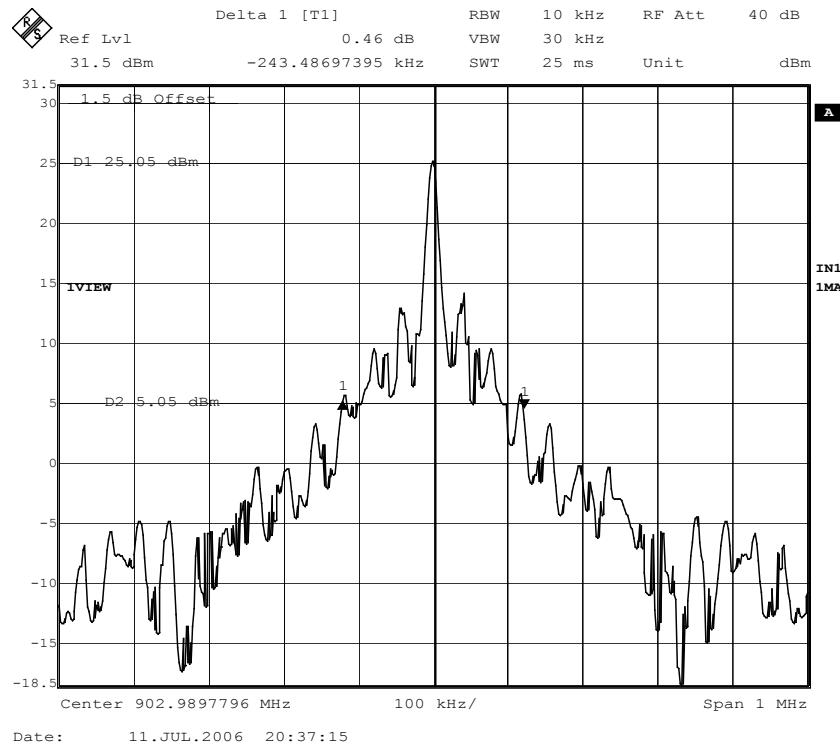


Figure 7. 20 dB Bandwidth, EPC Class 0, Channel 1.

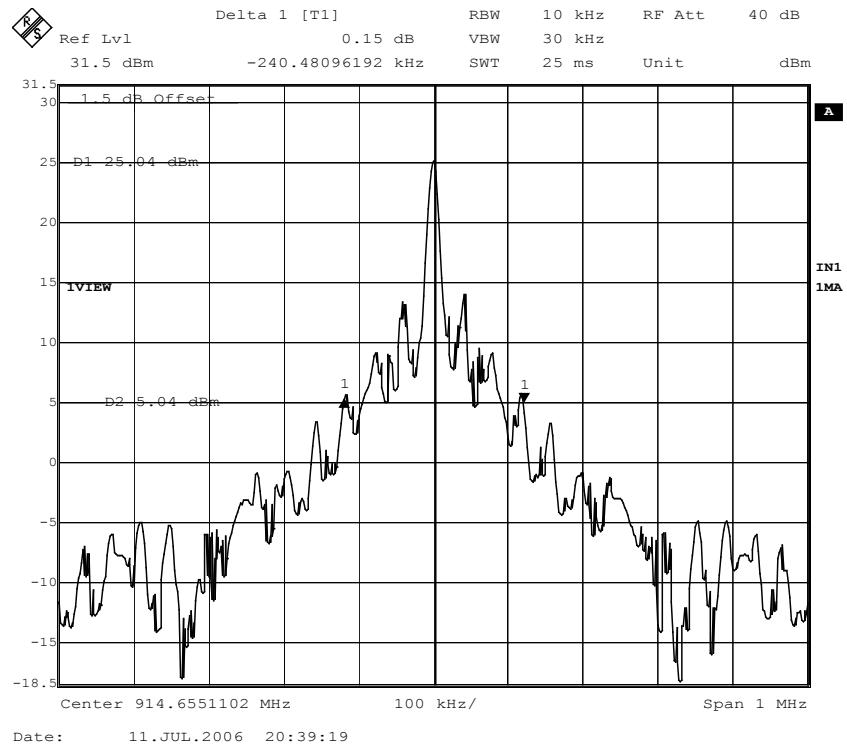


Figure 8. 20 dB Bandwidth, EPC Class 0, Channel 26.

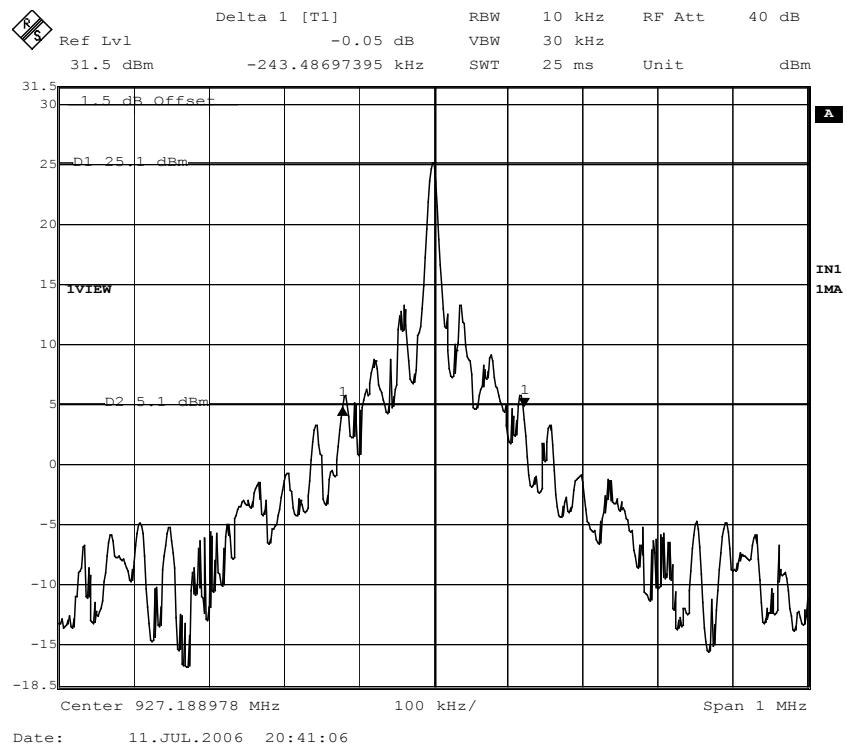


Figure 9. 20 dB Bandwidth, EPC Class 0, Channel 53.

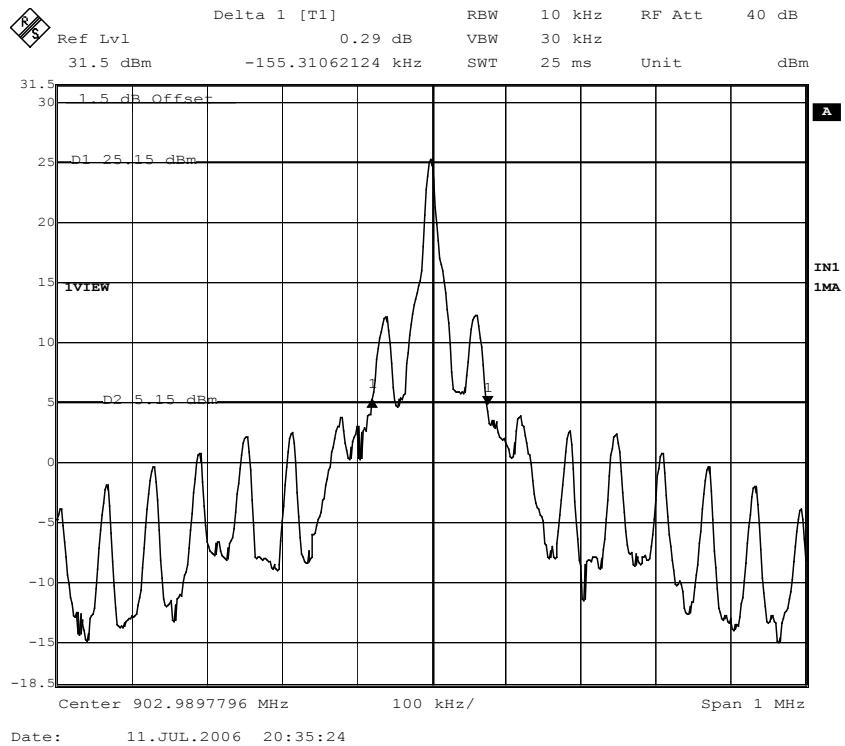


Figure 10. 20 dB Bandwidth, EPC Class 1, Channel 1.

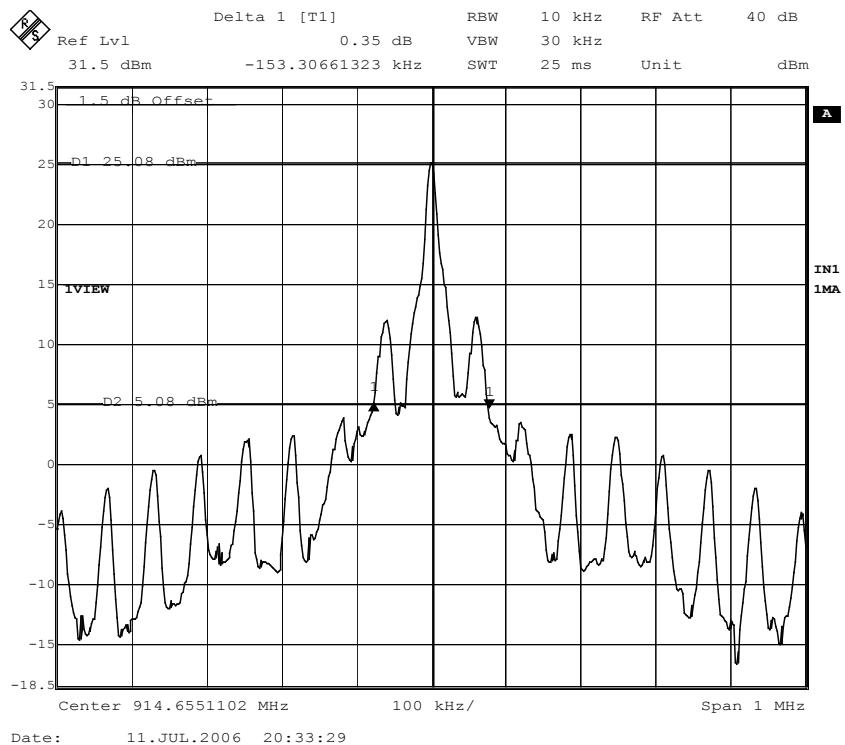


Figure 11. 20 dB Bandwidth, EPC Class 1, Channel 26.

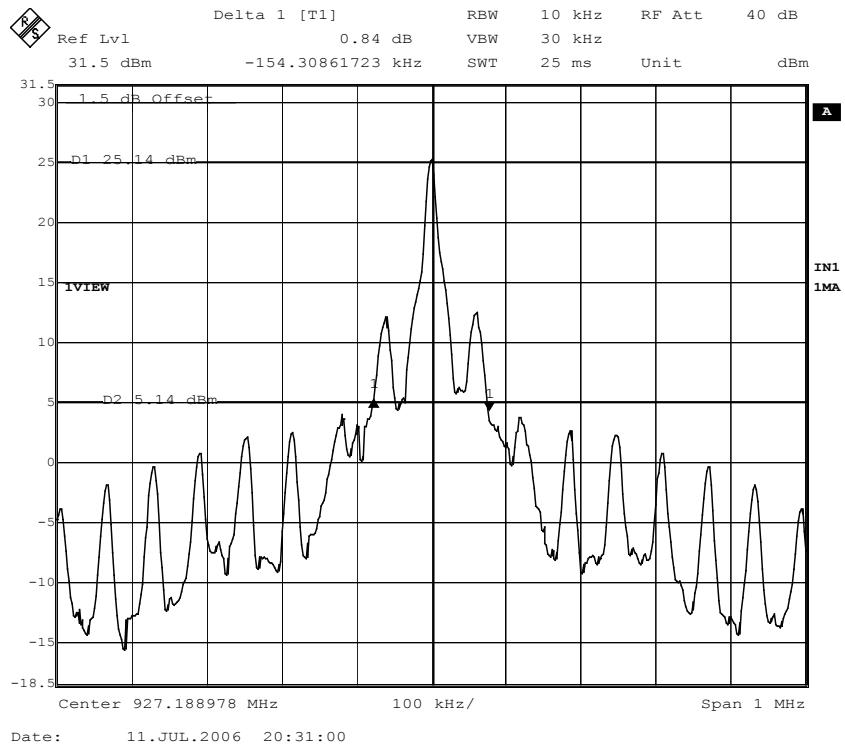


Figure 12. 20 dB Bandwidth, EPC Class 1, Channel 53.

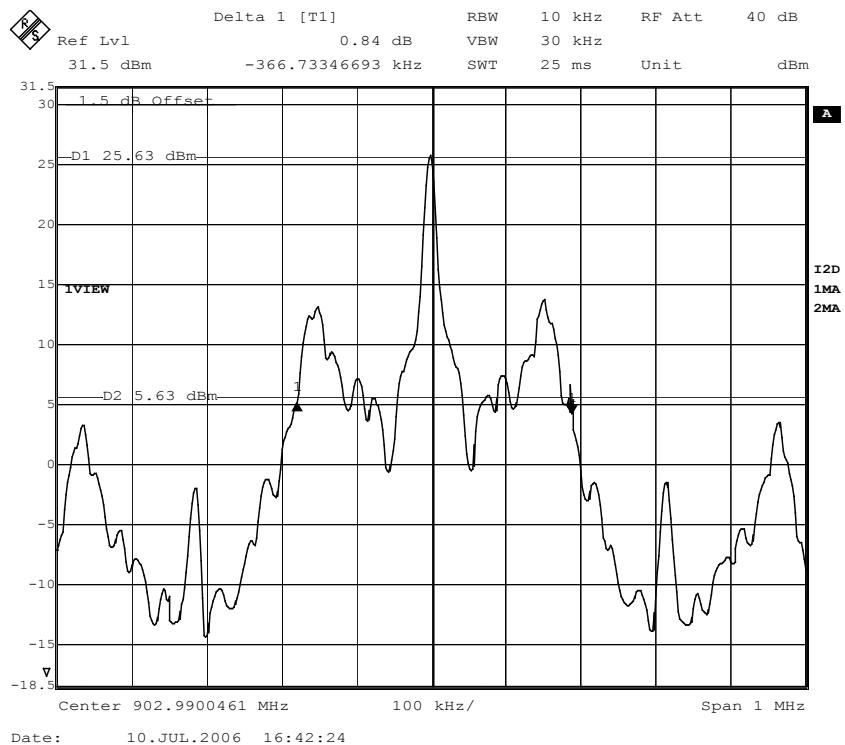


Figure 13. 20 dB Bandwidth, EPC Gen2, Channel 1.

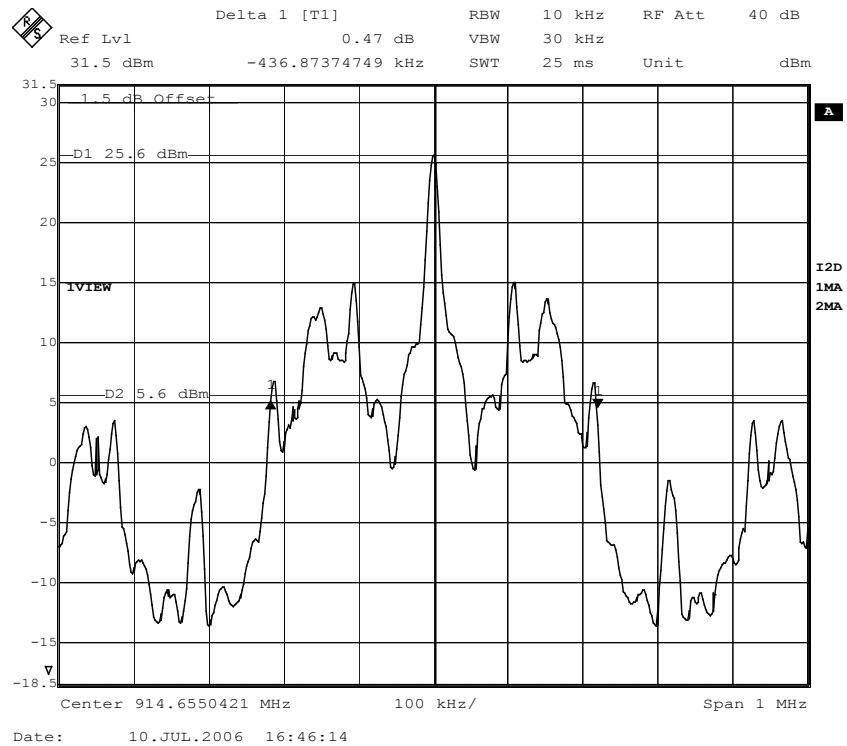


Figure 14. 20 dB Bandwidth, EPC Gen2, Channel 26.

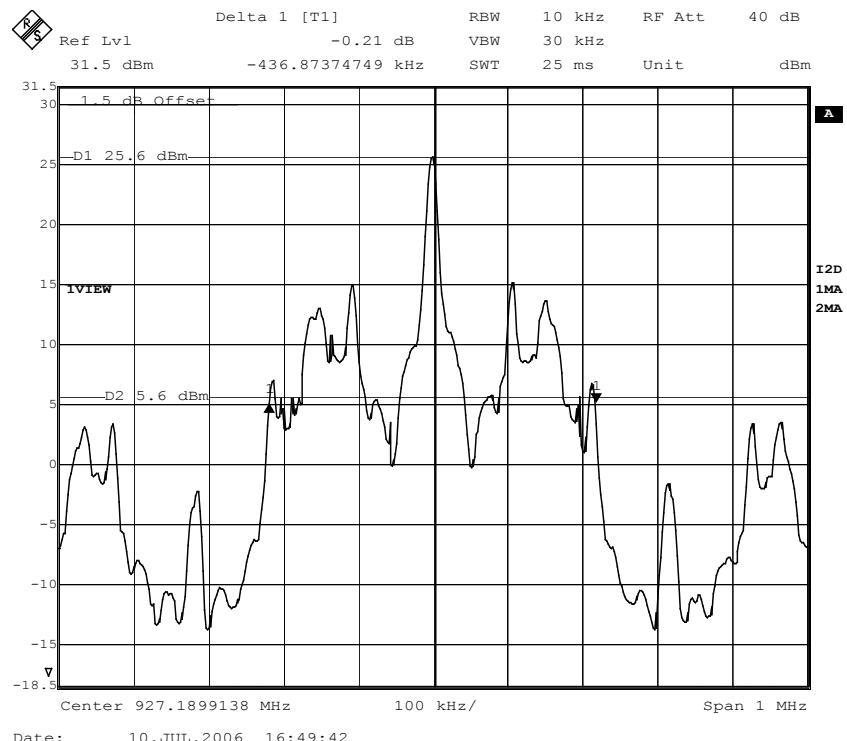


Figure 15. 20 dB Bandwidth, EPC Gen2, Channel 53.

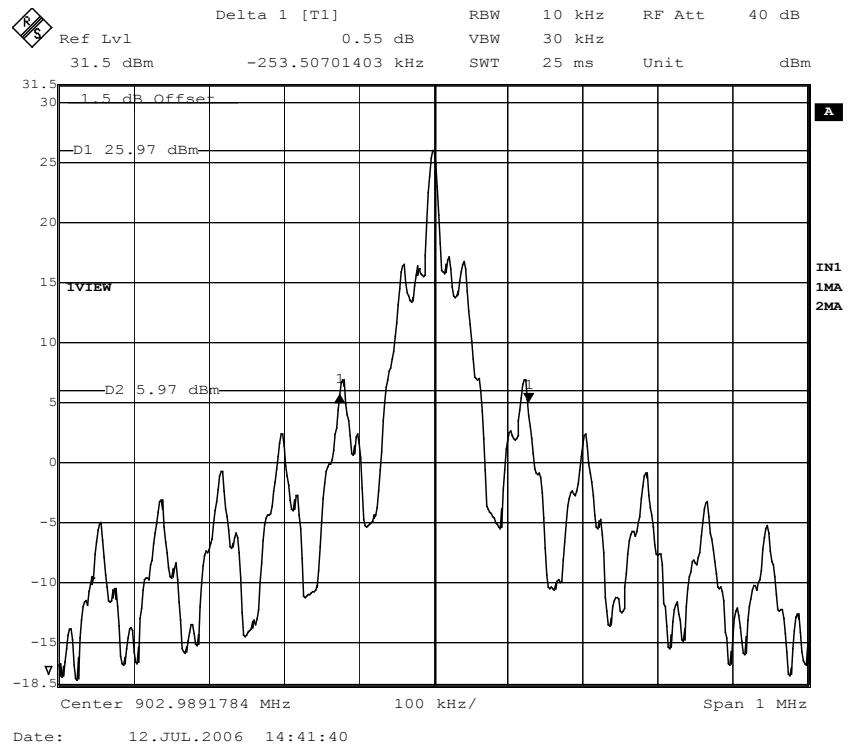


Figure 16. 20 dB Bandwidth, ISO 18000-6B, Channel 1.

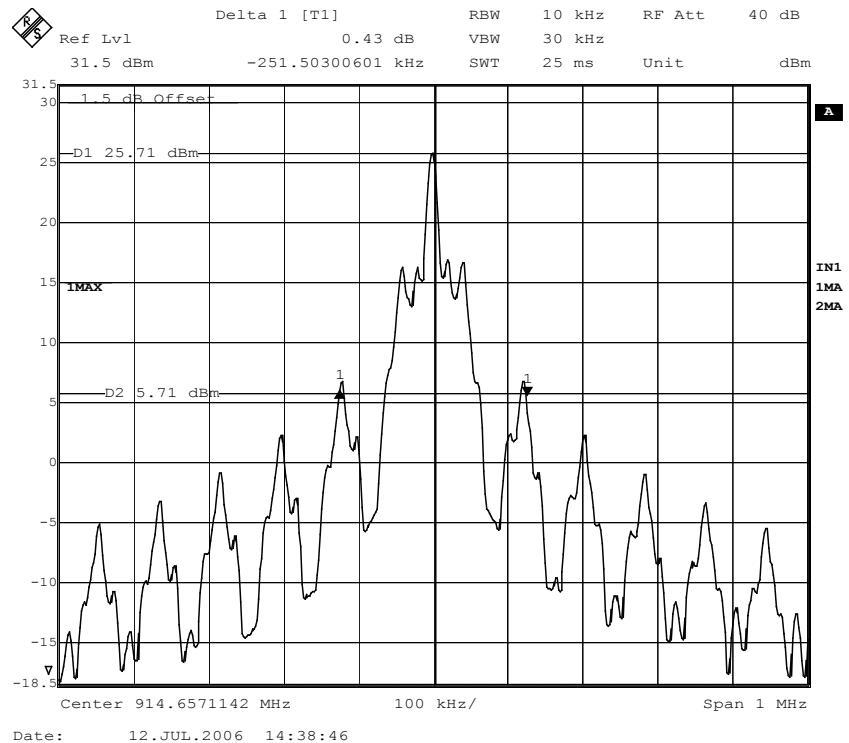


Figure 17. 20 dB Bandwidth, ISO 18000-6B, Channel 26.

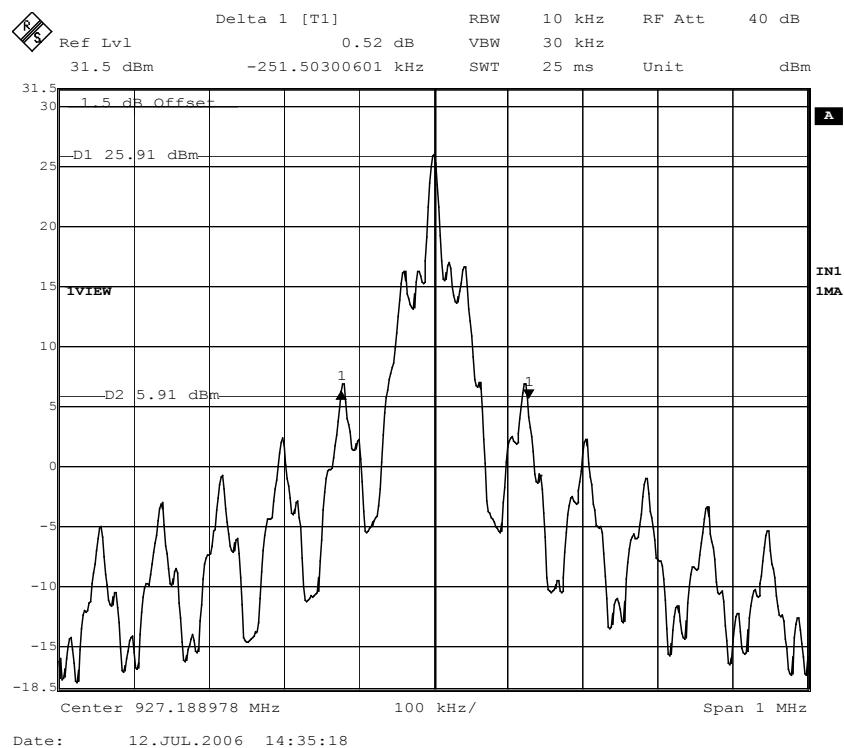


Figure 18. 20 dB Bandwidth, ISO 18000-6B, Channel 53.

8.2 HOPPING CHANNEL SEPARATION

Criteria for Hopping Channel Separation [1]: Frequency hopping systems operating in the 902-928 MHz band shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Test Procedure for Hopping Channel Separation: The antenna port of the EUT was connected directly to the input of the spectrum analyzer via a short coaxial cable. The resolution and video bandwidths of the analyzer were set to 100 kHz. The center frequency was set to 915 MHz, the center of the hopping frequencies. The frequency span was set so that at least 4 channels could be observed. The max hold function was used to capture the maximum levels over this frequency range. Markers were then used to determine the difference in the frequencies of two channels.

The EUT was operated in the EPC Gen2 mode with the hopping function enabled. It is not expected that the mode of operation would affect the hopping channel separation.

Results for Hopping Channel Separation: See Figure 19 for results. The hopping channel separation is 468.905 kHz. Since the maximum 20 dB bandwidth was 436.874 kHz, the EUT met the requirement for hopping channel separation.

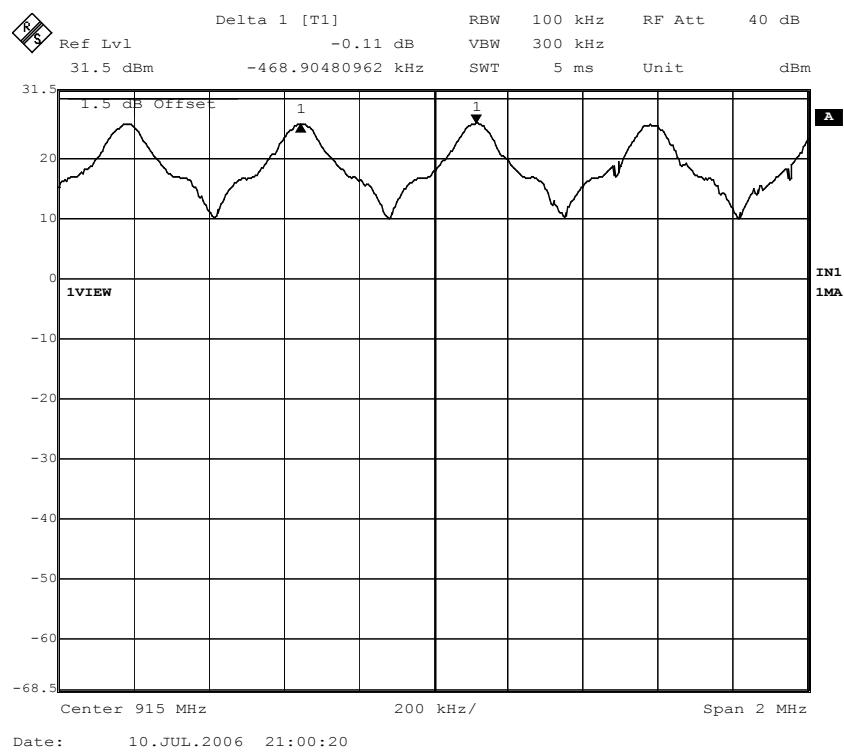


Figure 19. Hopping channel separation.

8.3 NUMBER OF HOPPING CHANNEL FREQUENCIES

Criteria for Number of Hopping Channel Frequencies [1]: For frequency hopping systems operating in the 902-928 MHz band, if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies.

Test Procedure for Number of Hopping Channel Frequencies: The antenna port of the EUT was connected directly to the input of the spectrum analyzer via a short coaxial cable. The resolution and video bandwidths of the analyzer were set to 100 kHz. The frequency span was set so that the entire frequency range of operation could be displayed on the spectrum analyzer. The max hold function was used to capture the maximum levels over this frequency range.

The EUT was operated in the EPC Gen2 mode with the hopping function enabled. It is not expected that the mode of operation would affect the number of hopping channels.

Results for Number of Hopping Channel Frequencies: See Figure 20 for results. The number of hopping channels used by the EUT is 53. Since the range of the 20 dB bandwidth was 191.383 kHz - 436.874 kHz, the EUT met the requirements of using at least 50 hopping channel frequencies.

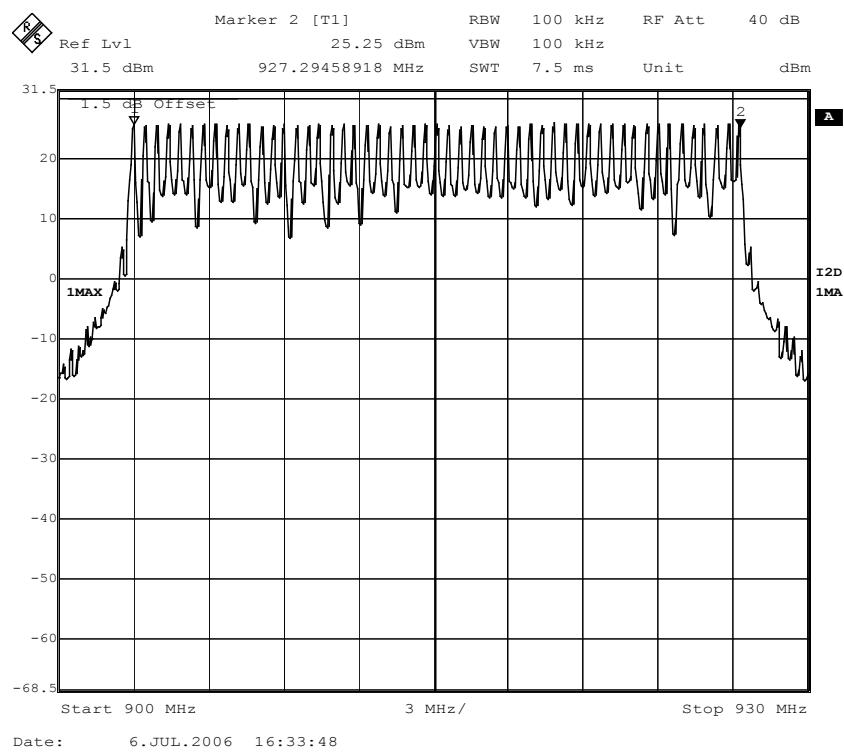


Figure 20. Number of hopping channels.

8.4 AVERAGE TIME OF OCCUPANCY

Criteria for Average Time of Occupancy [1]: For frequency hopping systems operating in the 902-928 MHz band, if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not be greater than 400 milliseconds within a 20 second period. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 400 milliseconds within a 10 second period.

Test Procedure for Average Time of Occupancy: The antenna port of the EUT was connected directly to the input of the spectrum analyzer via a short coaxial cable. The resolution and video bandwidths of the analyzer were set to 100 kHz. The frequency span was set so that the entire channel of operation could be displayed on the spectrum analyzer. The max hold function was used to capture the maximum levels over this frequency range. The frequency that corresponded to the highest amplitude in the channel was then set to be the center frequency.

The span was then set to 0 MHz and the sweep time was set to 5 seconds. The number of times the channel was occupied in a 5 second interval was then measured. This measurement was repeated 5 times and these times are designated as N_1 , N_2 , N_3 , N_4 and N_5 . The average number of times the channel is occupied in a 1 second interval is given as N_{avg} and is calculated by the equation:

$$N_{avg} = \frac{N_1 + N_2 + N_3 + N_4 + N_5}{5}$$

The sweep time was then set to 5 ms and the total time (t_{ON}) the channel was active within an occurrence was measured. The total time a channel was occupied within a period of t_{period} can be calculated using the following equation:

$$t_{occupied} = t_{period} N_{avg} t_{ON}$$

The EUT was operated in the EPC Gen2 mode with the hopping function enabled. It is not expected that the mode of operation would affect the average time of occupancy. The measurements were performed while centered on the lowest, highest and middle channels.

Results for Average Time of Occupancy: See Table 2 for results. Measured number of occurrences for 1 of 5 samples and occupied time are shown in Figures 21 - 26. The maximum occupancy time was 123.10 ms in a 10 second interval and 246.19 ms in a 20 second interval. The EUT met the requirements for average time of occupancy.

| Channel | Number Occurrences in 5s Interval | | | | | N_{avg} | t_{ON} (ms) | Occupancy Time in 10 sec (ms) | Occupancy Time in 20 sec (ms) |
|---------|-----------------------------------|-------|-------|-------|-------|-----------|---------------|-------------------------------|-------------------------------|
| | N_1 | N_2 | N_3 | N_4 | N_5 | | | | |
| 1 | 13 | 13 | 14 | 13 | 13 | 13.20 | 3.40 | 89.76 | 179.52 |
| 26 | 14 | 14 | 14 | 14 | 14 | 14.00 | 4.28 | 119.84 | 239.68 |
| 53 | 13 | 14 | 14 | 14 | 14 | 13.80 | 4.46 | 123.10 | 246.19 |

Table 2. Measured data for occupancy times.

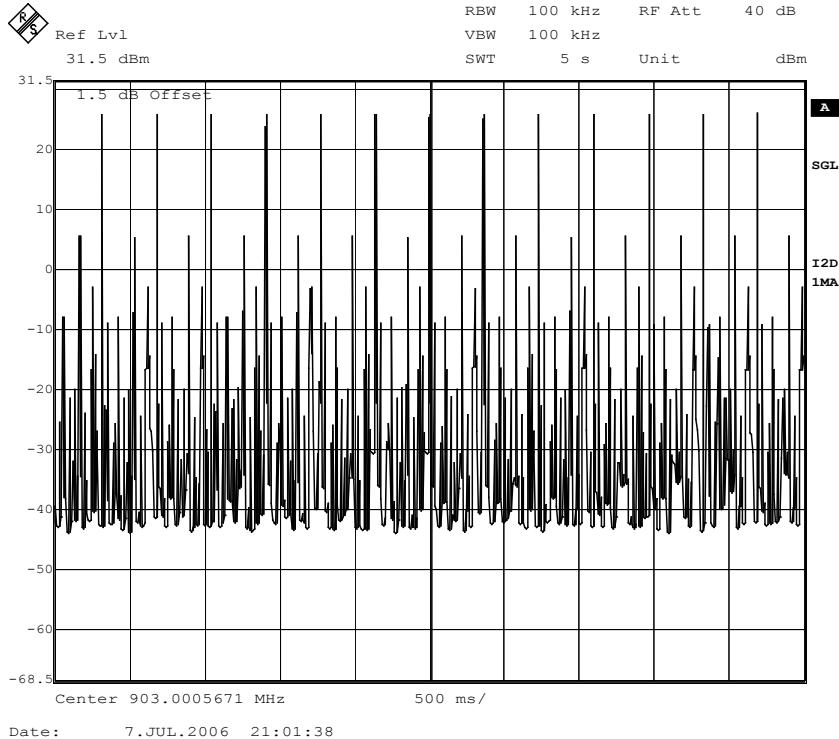


Figure 21. Number of ON events in a 5 second sweep; Channel 1.

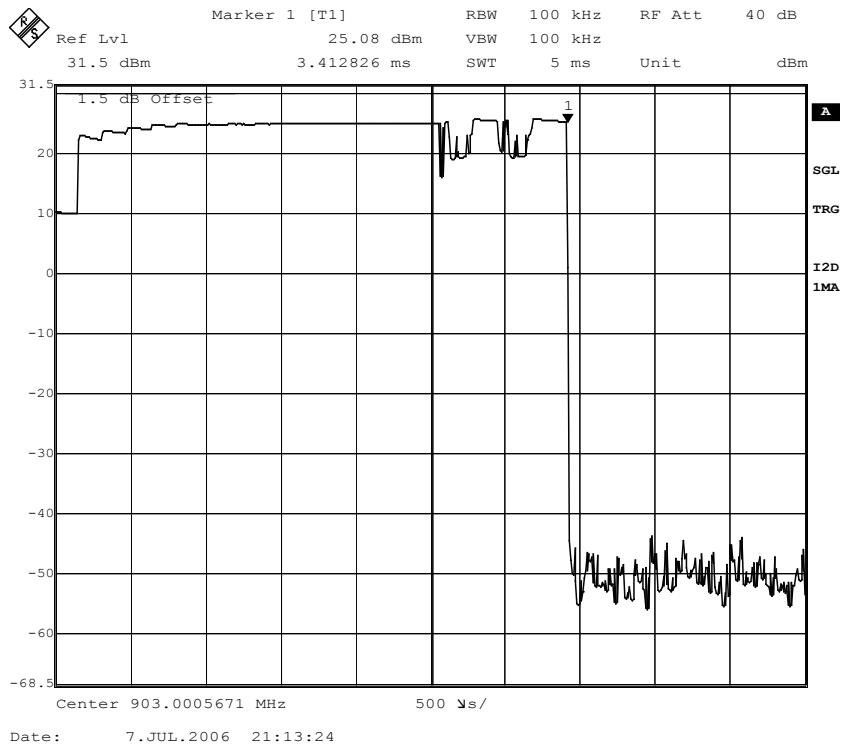


Figure 22. ON time; Channel 1.

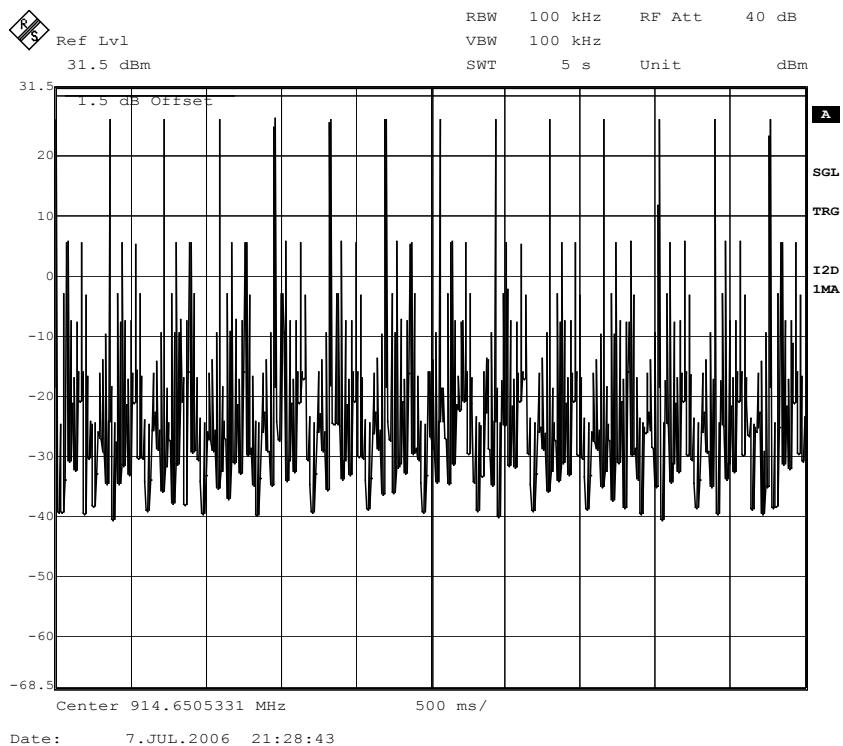


Figure 23. Number of ON events in a 5 second sweep; Channel 26.

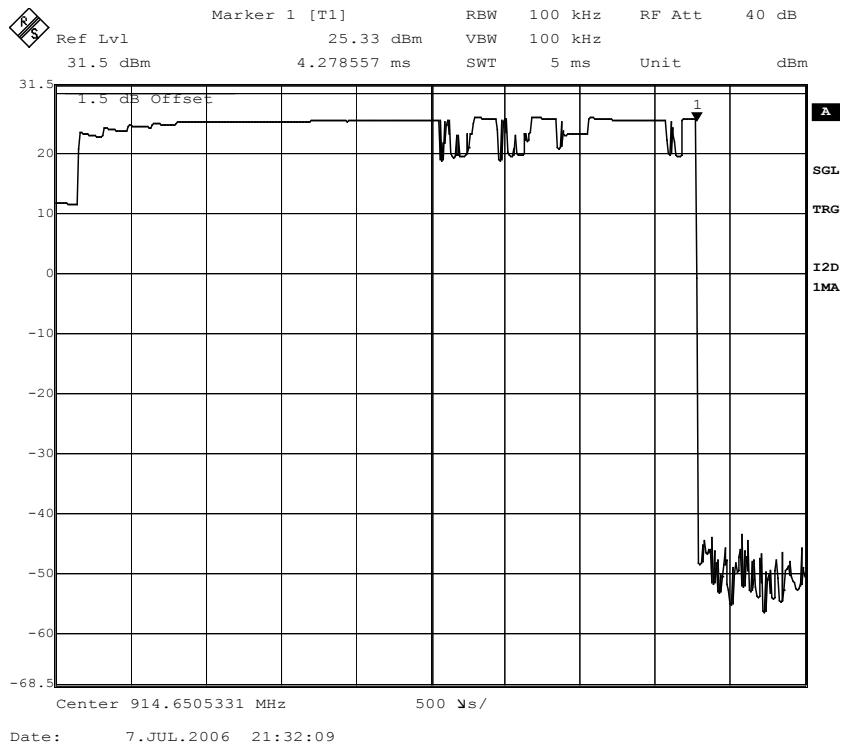


Figure 24. ON time; Channel 26.

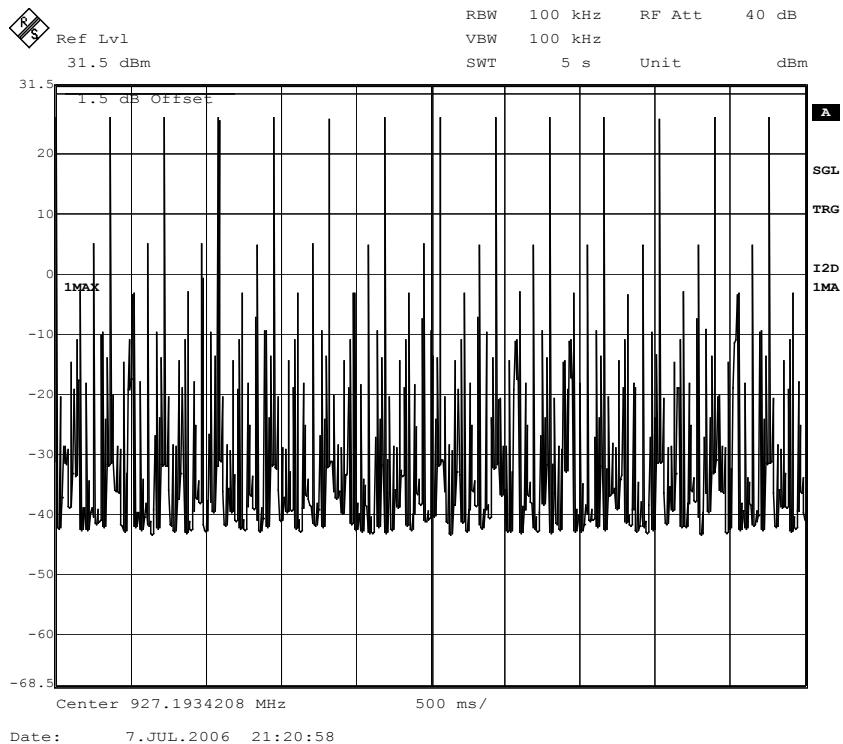


Figure 25. Number of ON events in a 5 second sweep; Channel 53.

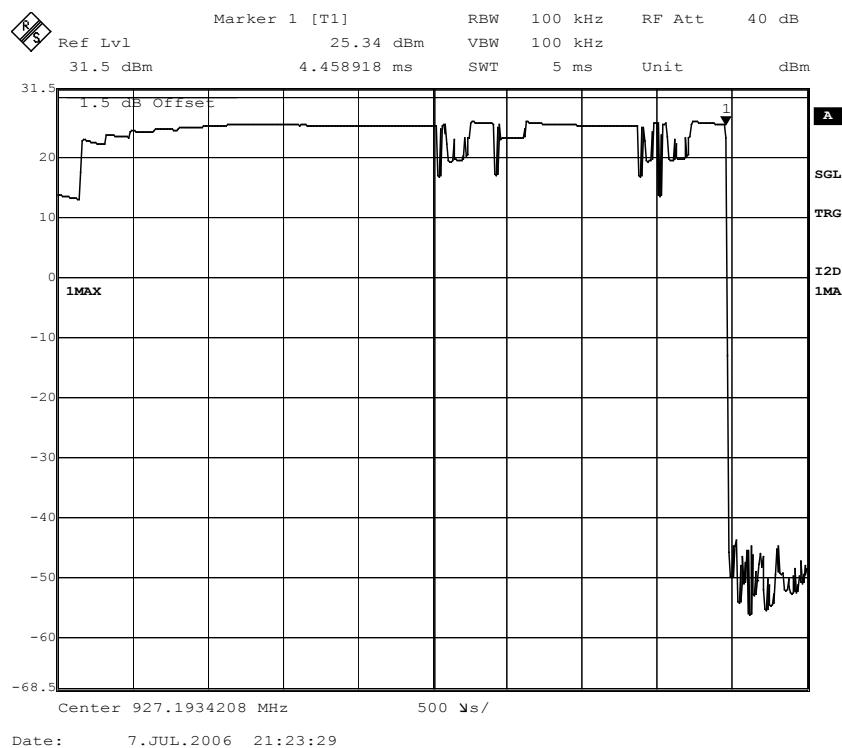


Figure 26. ON time; Channel 53.

8.5 CONDUCTED POWER

Criteria for Conducted Power [1]: For systems using frequency hopping techniques in the 902 - 928 MHz band and employing at least 50 hopping channels, the maximum peak output power is 1 Watt (30 dBm). The variation of the input power shall be also be measured with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Test Procedure for Conducted Power: The antenna port of the EUT was connected directly to the input of a spectrum analyzer via a short coaxial cable. The level of the spectrum analyzer was offset an amount equal to the loss of the short coaxial cable. The resolution and video bandwidths of the analyzer were set to 1 MHz and 3 MHz, respectively. The frequency span was set to 2 MHz. The max hold function was used to capture the maximum levels over this frequency range. The peak search function was used to report the highest power level.

Power measurements were performed with the AC supply voltage to the EUT set to 102V/60Hz (85% nominal), 120V/60Hz (nominal) and 138V/60Hz (115% nominal).

The EUT was operated in the EPC Gen2 mode with the hopping function disabled. It is not expected that the mode of operation would affect the conducted power.

Results for Conducted Power: See Figures 27 - 35 for results. The maximum conducted power for the lowest, highest and middle channels and various supply voltages was 26.23 dBm. The EUT met the requirement for a maximum output power of 30 dBm.

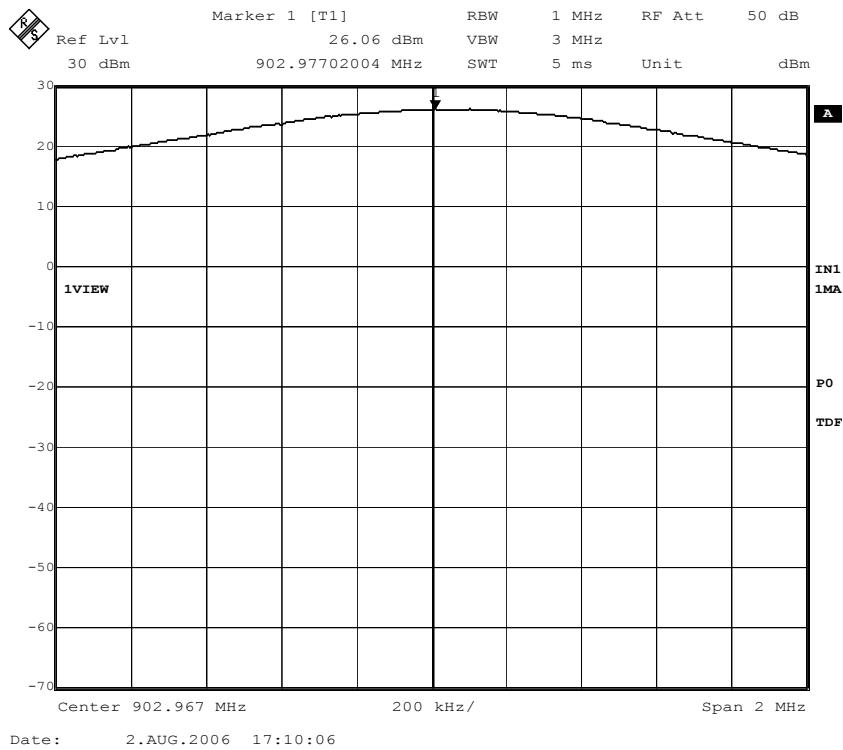


Figure 27. Conducted output power; Channel 1, nominal voltage.

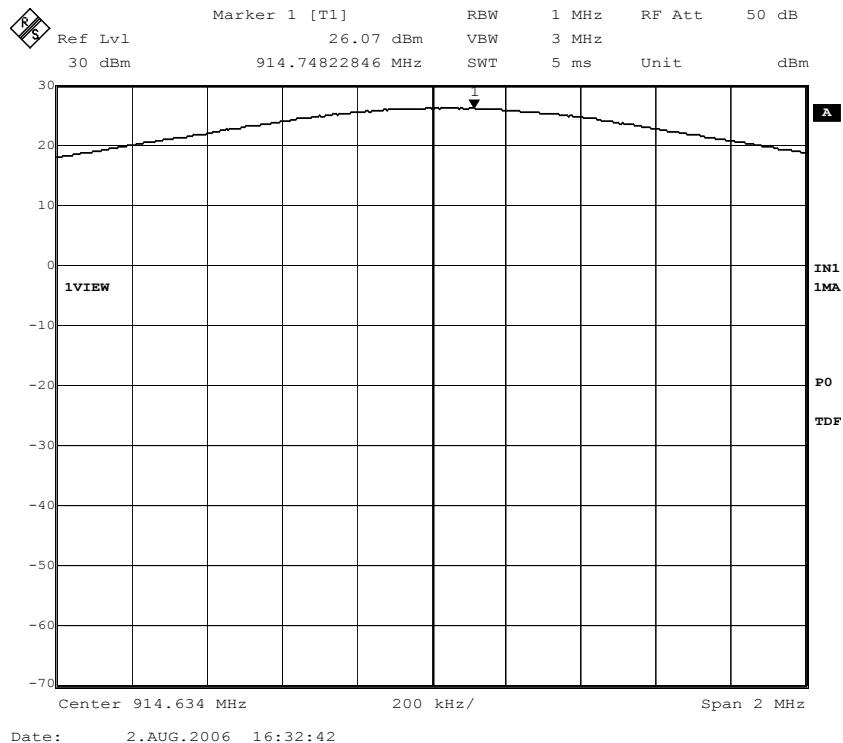


Figure 28. Conducted output power; Channel 26, nominal voltage.

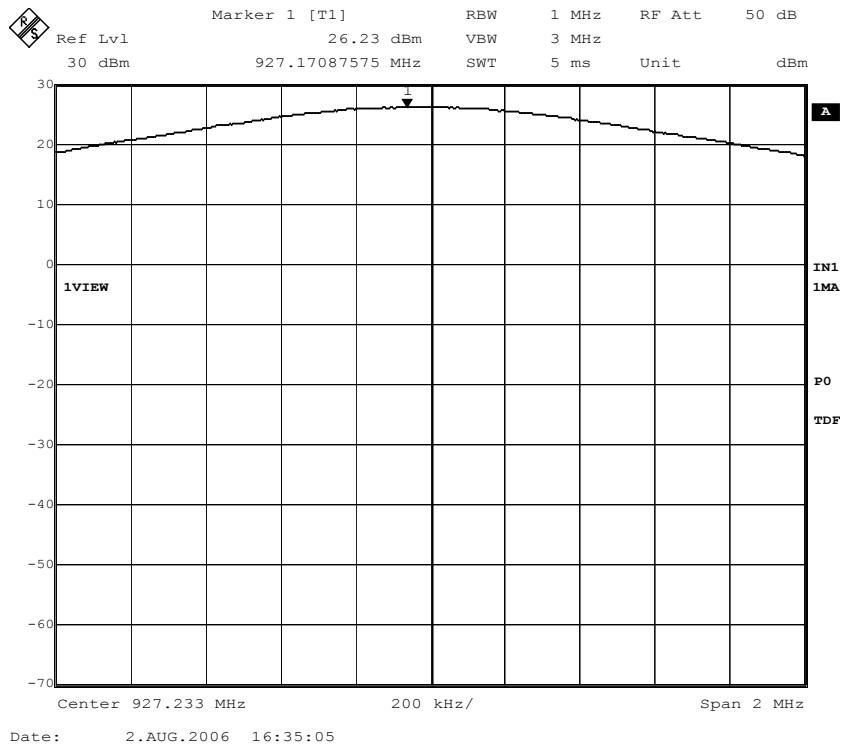


Figure 29. Conducted output power; Channel 53, nominal voltage.

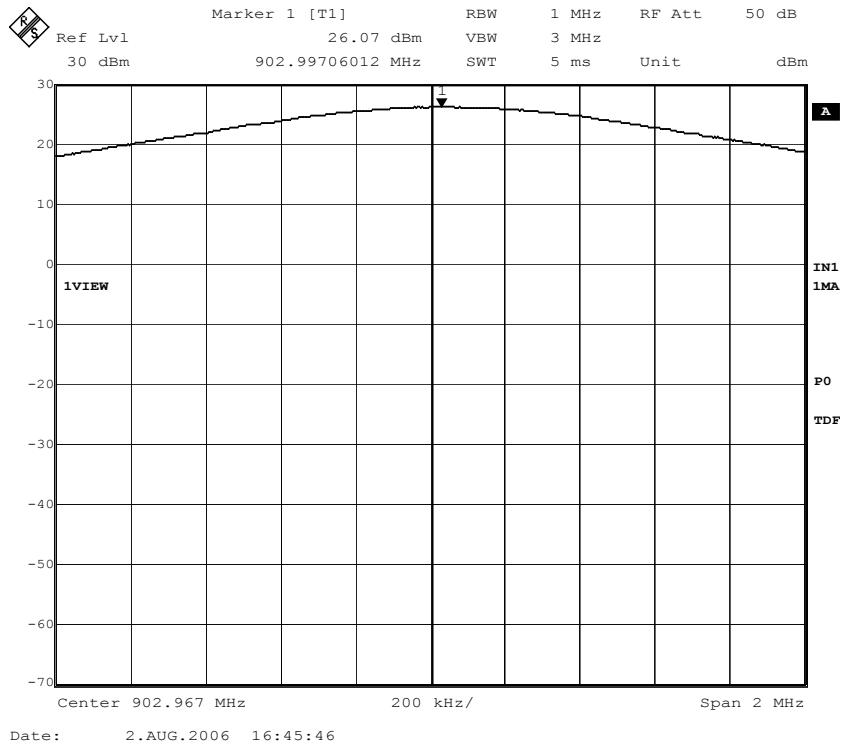


Figure 30. Conducted output power; Channel 1, 85% nominal voltage.

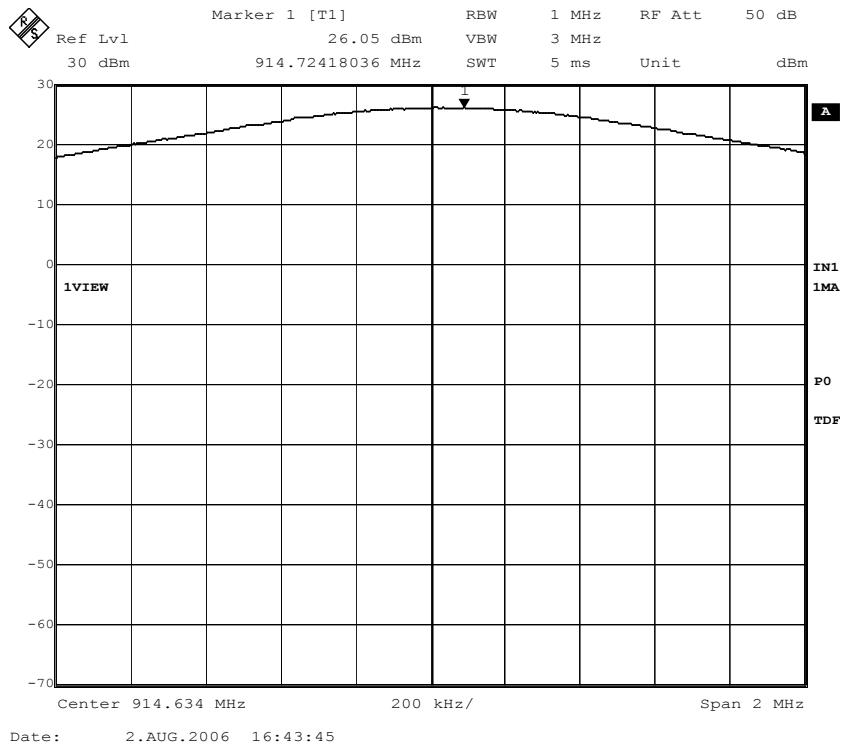


Figure 31. Conducted output power; Channel 26, 85% nominal voltage.

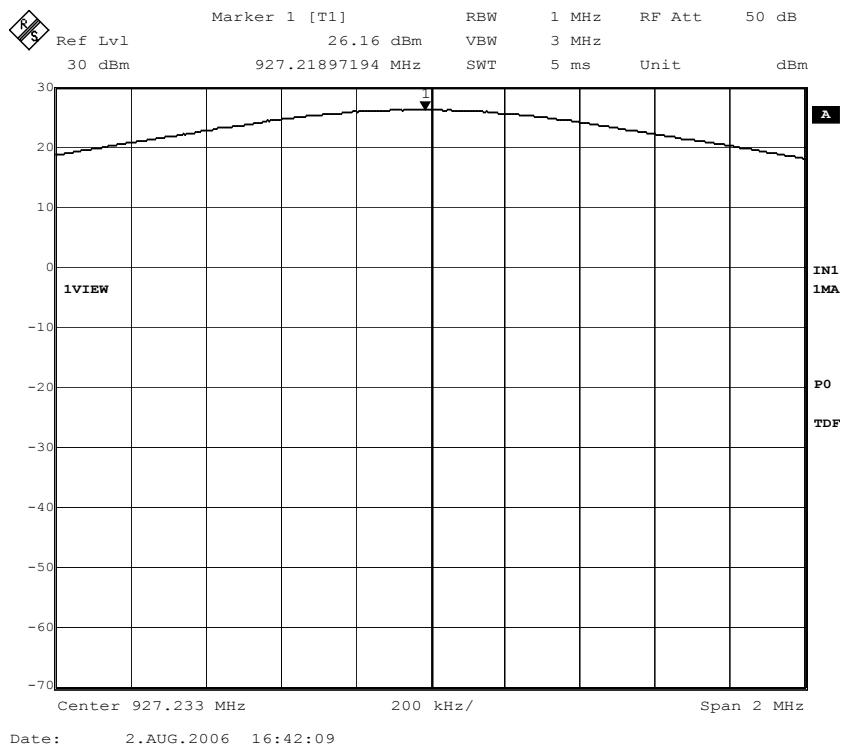


Figure 32. Conducted output power; Channel 53, 85% nominal voltage.

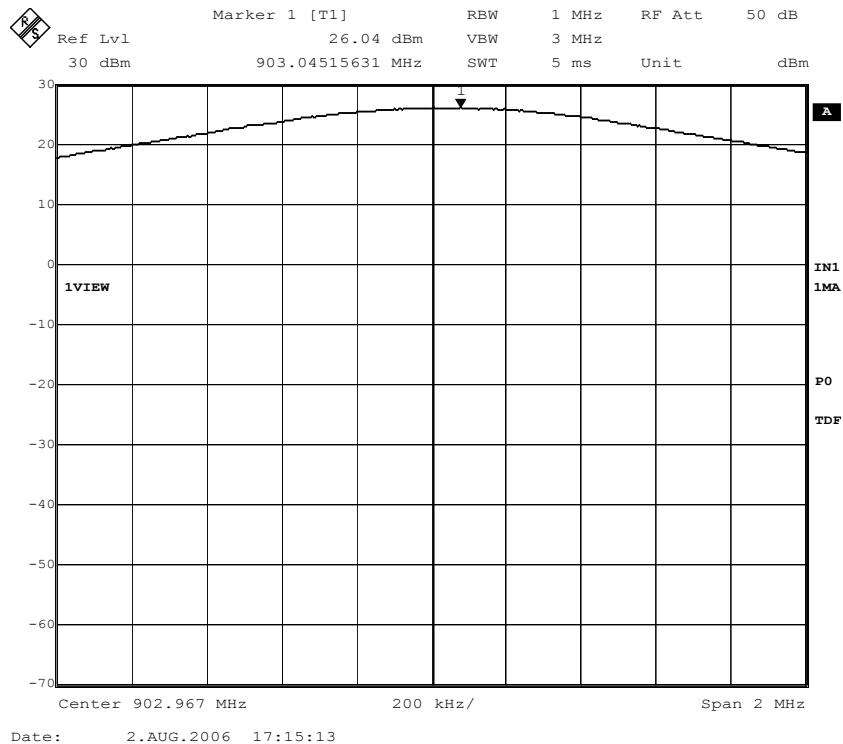


Figure 33. Conducted output power; Channel 1, 115% nominal voltage.

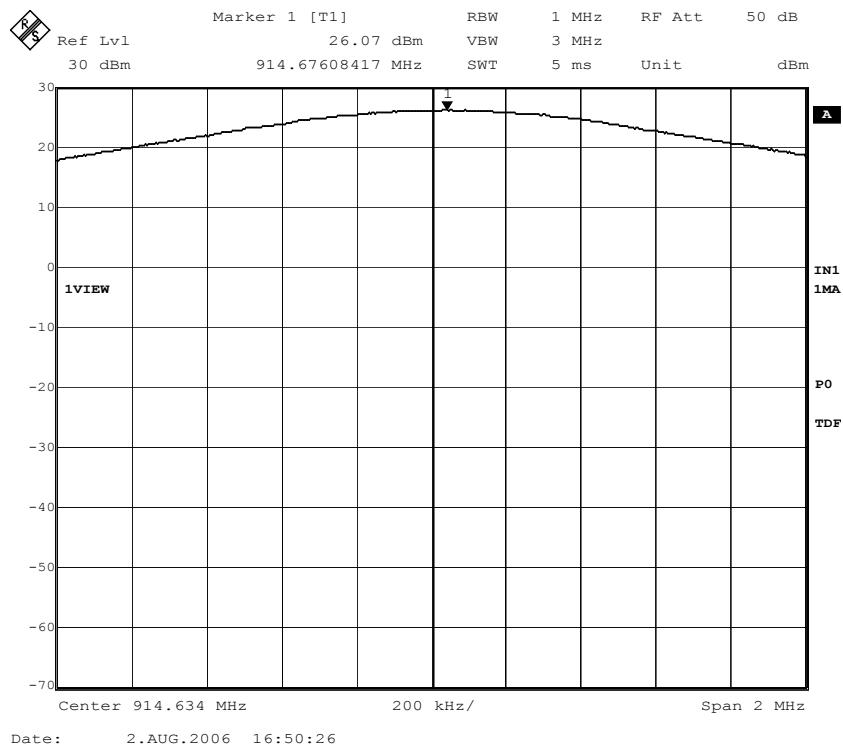


Figure 34. Conducted output power; Channel 26, 115% nominal voltage.

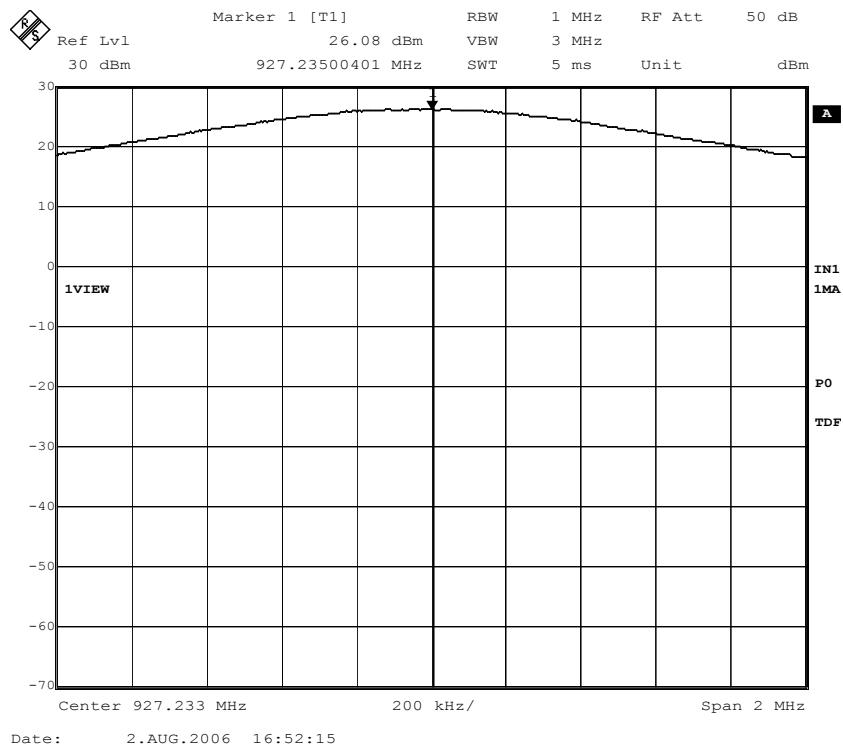


Figure 35. Conducted output power; Channel 53, 115% nominal voltage.

8.6 OUT OF BAND EMISSIONS AT ANTENNA TERMINALS

Criteria for Out of Band Emissions at Antenna Terminals [1]: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated EUT is operating, the radio frequency power that is produced by the EUT shall be at least 20 dB below that within the 100 kHz bandwidth within the band that contains the highest level of the desired power. This measurement shall be based upon either an RF conducted or a radiated measurement provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based upon the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.

Test Procedure for Out of Band Emissions at Antenna Terminals: The antenna port of the EUT was connected directly to the input of the spectrum analyzer. The resolution and video bandwidths of the analyzer were set to 100 kHz and 300 kHz, respectively. The amplitude of the spectrum analyzer was corrected for the insertion loss of the short coaxial cable connecting the EUT to the spectrum analyzer.

In order to establish the power level in the 100 kHz bandwidth within the band that contains the desired power, the spectrum analyzer was set to sweep from 900 MHz to 930 MHz. The hopping function was enabled and the levels recorded.

The frequency span was then set to sweep from 30 MHz to 10 GHz, excluding the 900 MHz to 930 MHz band. The max hold function was used to capture the maximum levels over this frequency range. Markers and display lines were then used to determine the difference in amplitude of the fundamental emission and the highest emission other than the fundamental.

In order to confirm that the edges of the transmitting bands were compliant, further measurements were made in a frequency range immediately below the lowest channel of operation and in a frequency range immediately above the highest channel of operation. In these cases, measurements were performed in all modes of operation and with both the hopping function enabled and disabled.

Results for Out of Band Emissions at Antenna Terminals: Figure 36 contains the results of the in-band power with the hopping function enabled. The highest power level within the desired band was 26.11 dBm. Figures 37 - 39 contain the power levels over the frequency range of 30 MHz - 10 GHz when the hopping function was enabled. This data indicates that all out of band emissions in the frequency range 30 MHz - 10 GHz were at least 20 dB below the in-band signal.

Figures 40 - 55 contain measurements for band-edge compliance in all modes with the hopping function enabled and disabled. This data indicates that all out of band emissions immediately adjacent to the highest and lowest channels of operation were at least 20 dB below the in-band signal.

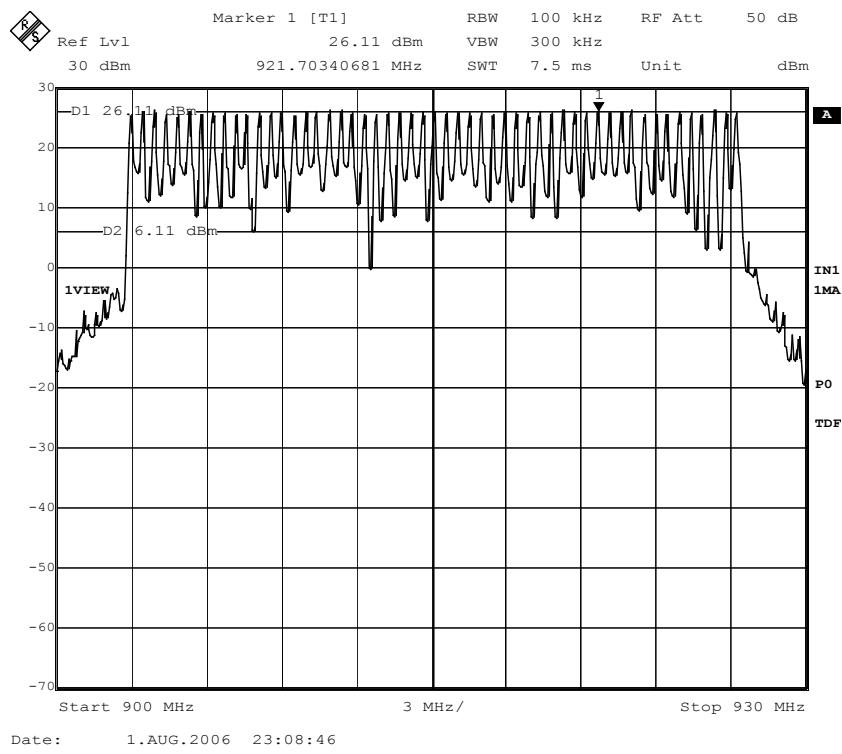


Figure 36. In band emissions at antenna port; 900 MHz - 930 MHz.

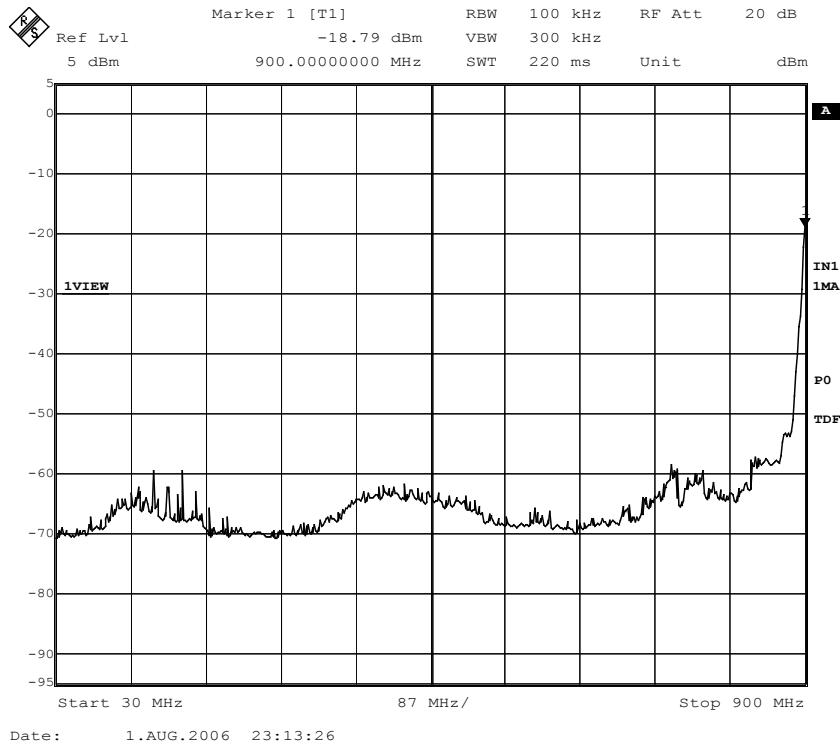


Figure 37. Out of band emissions at antenna port; 30 MHz - 900 MHz.

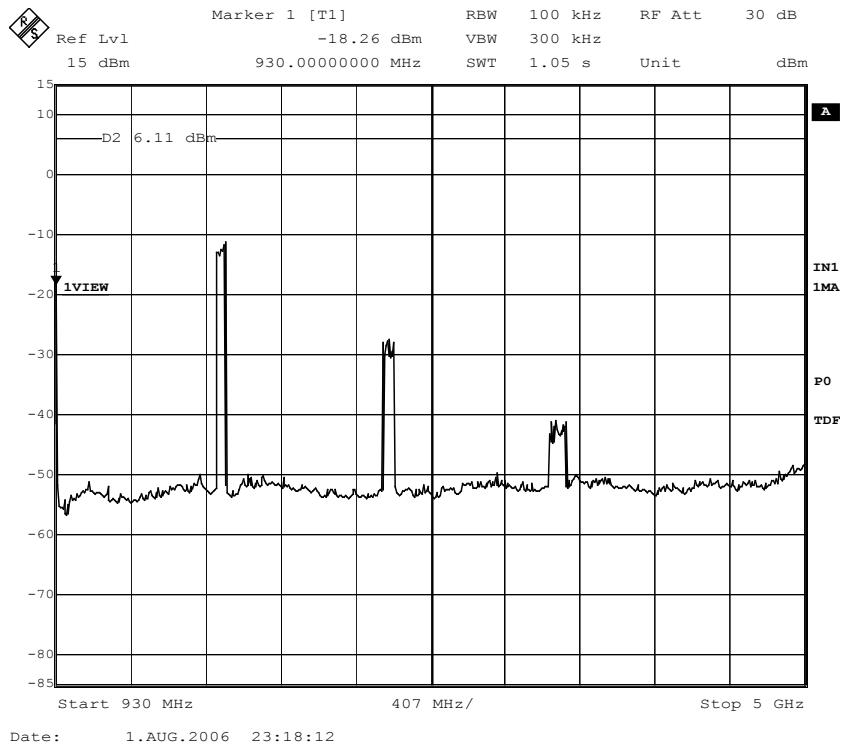


Figure 38. Out of band emissions at antenna port; 930 MHz - 5 GHz.

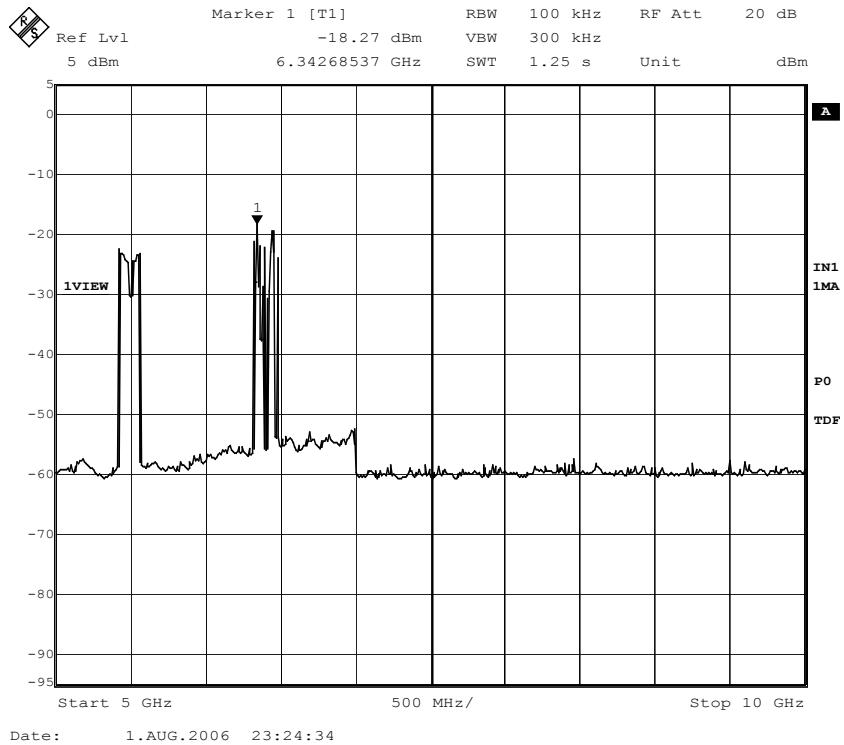


Figure 39. Out of band emissions at antenna port; 5 GHz - 10 GHz.

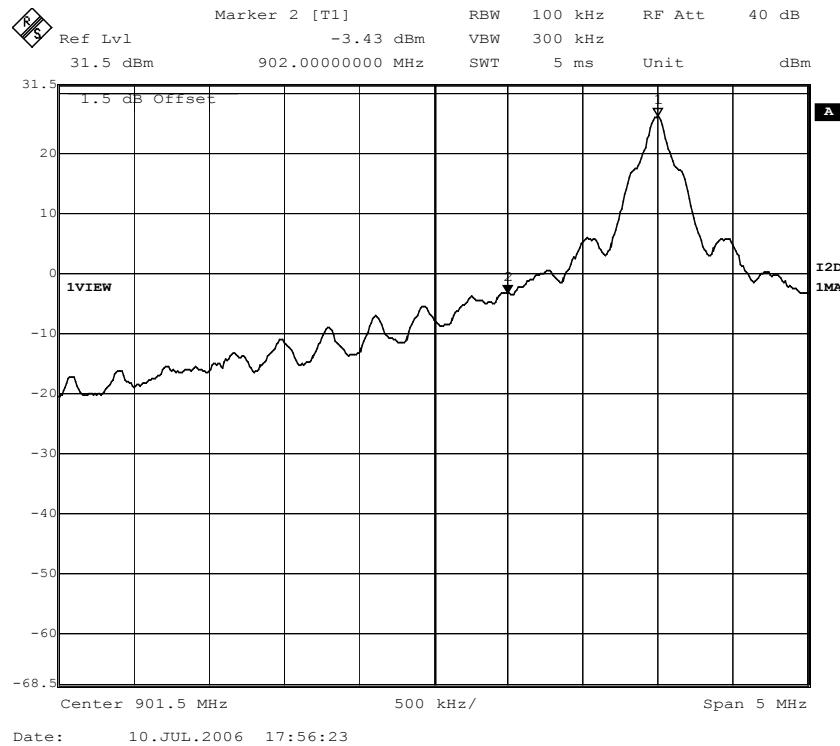


Figure 40. Band edge compliance; EPC Gen2 mode; Channel 1, hopping disabled.

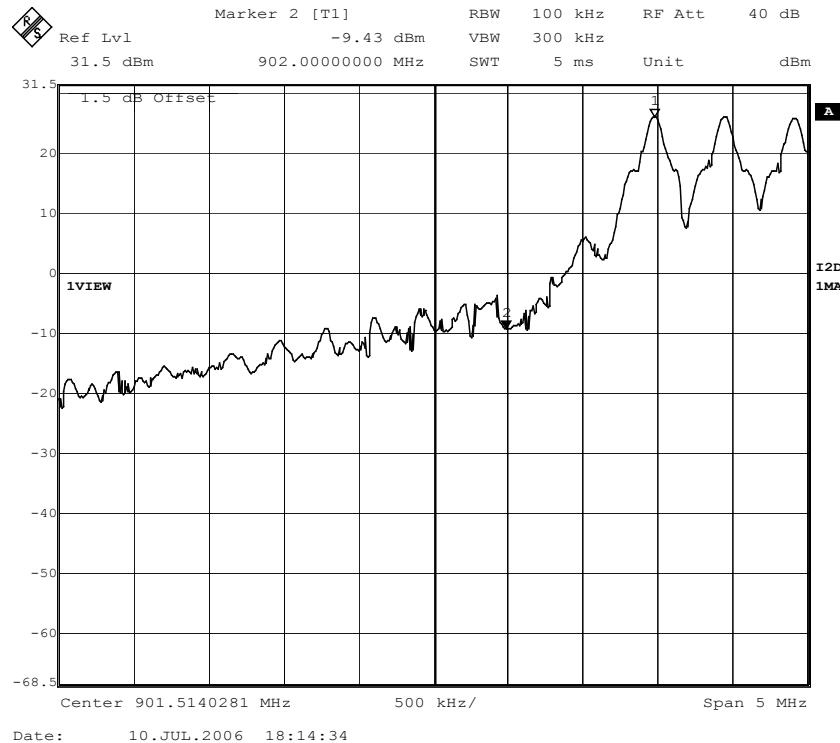


Figure 41. Band edge compliance; EPC Gen2 mode; Channel 1, hopping enabled.

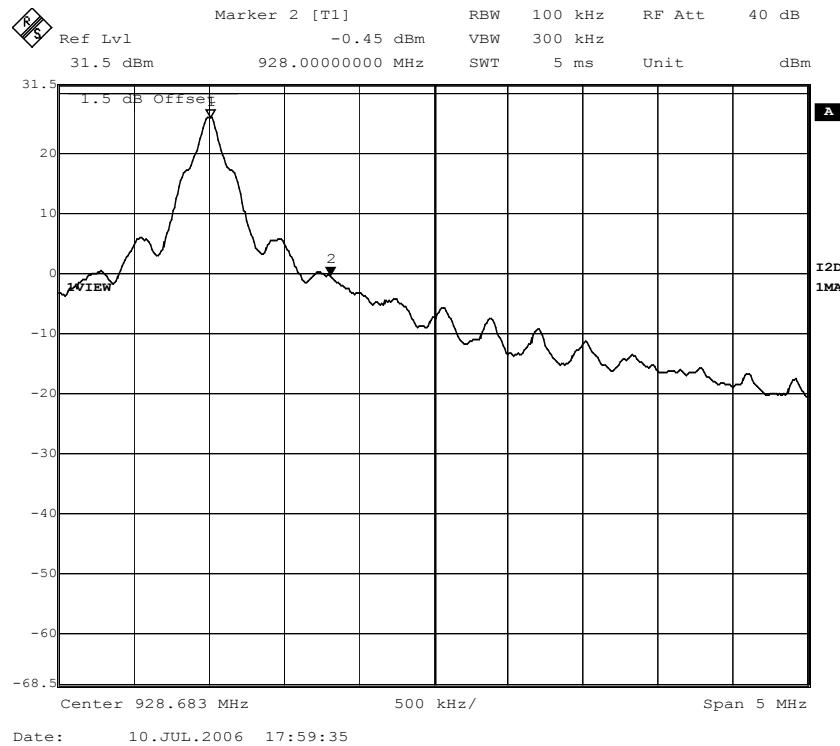


Figure 42. Band edge compliance; EPC Gen2 mode; Channel 53, hopping disabled.

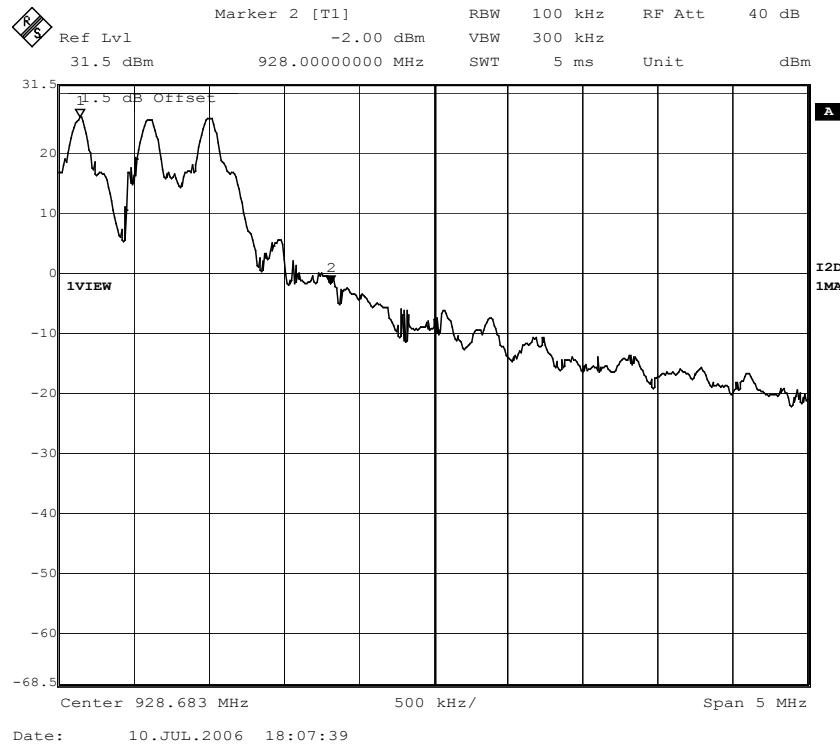


Figure 43. Band edge compliance; EPC Gen2 mode; Channel 53, hopping enabled.

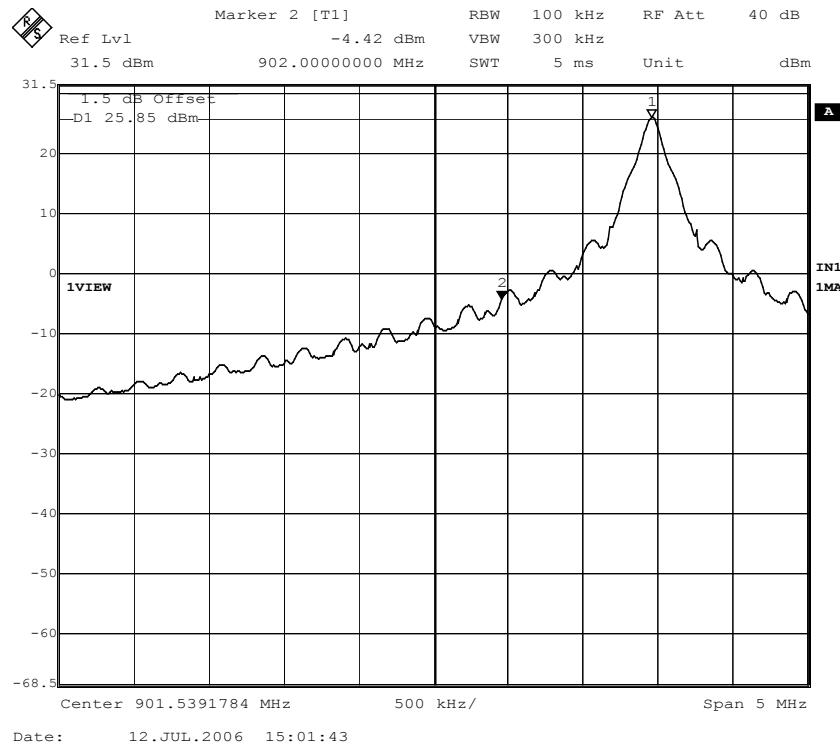


Figure 44. Band edge compliance; EPC Class 0 mode; Channel 1, hopping disabled.

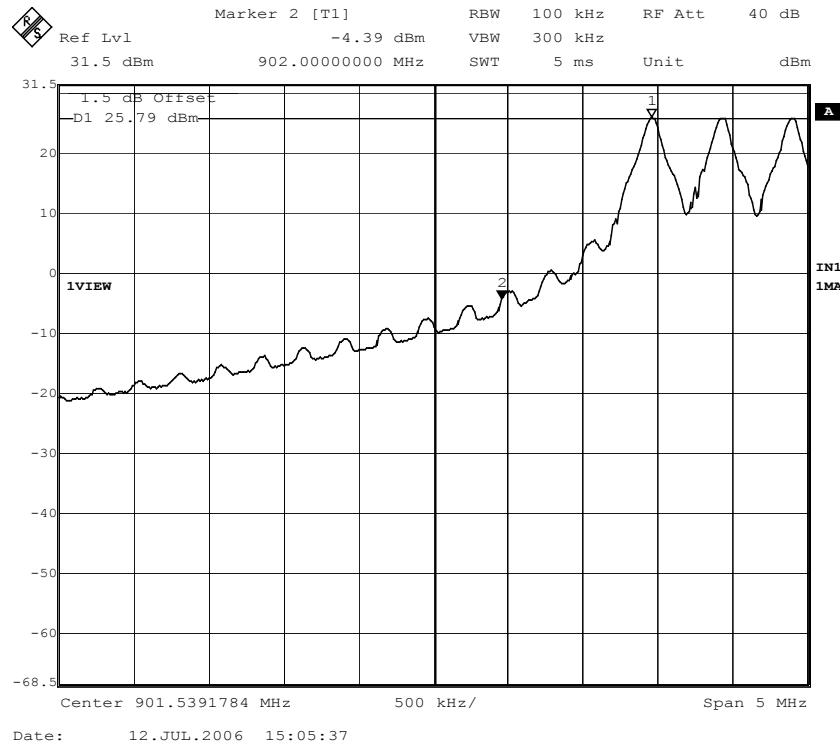


Figure 45. Band edge compliance; EPC Class 0 mode; Channel 1, hopping enabled.

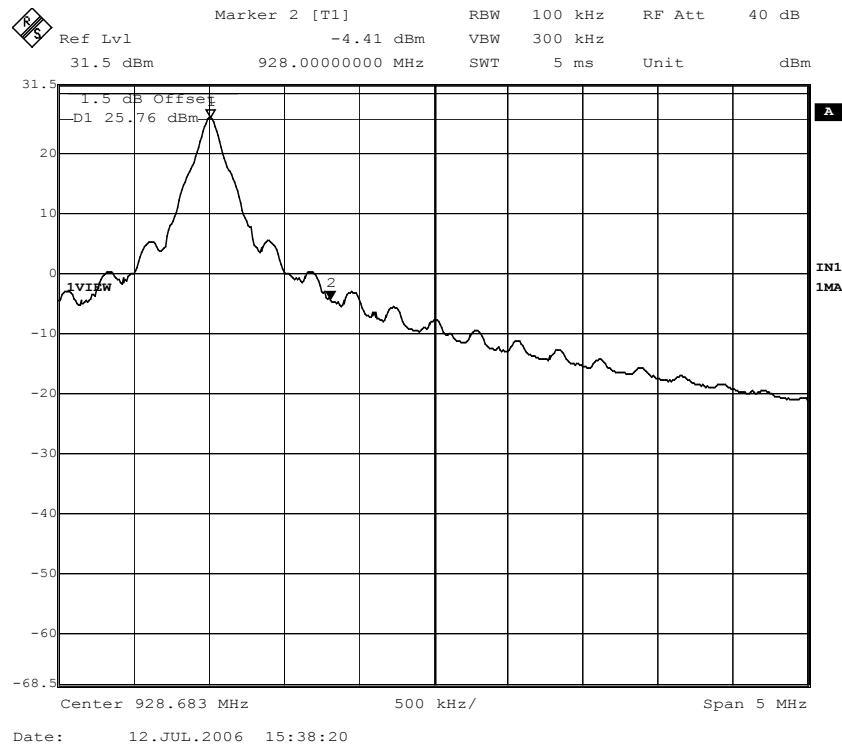


Figure 46. Band edge compliance; EPC Class 0 mode; Channel 53, hopping disabled.

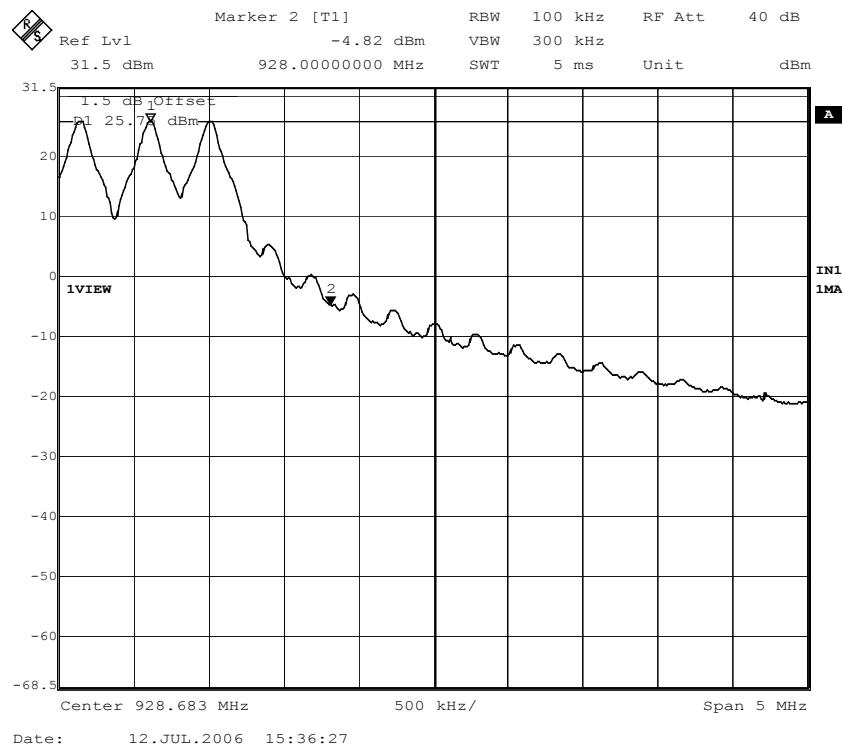


Figure 47. Band edge compliance; EPC Class 0 mode; Channel 53, hopping enabled.

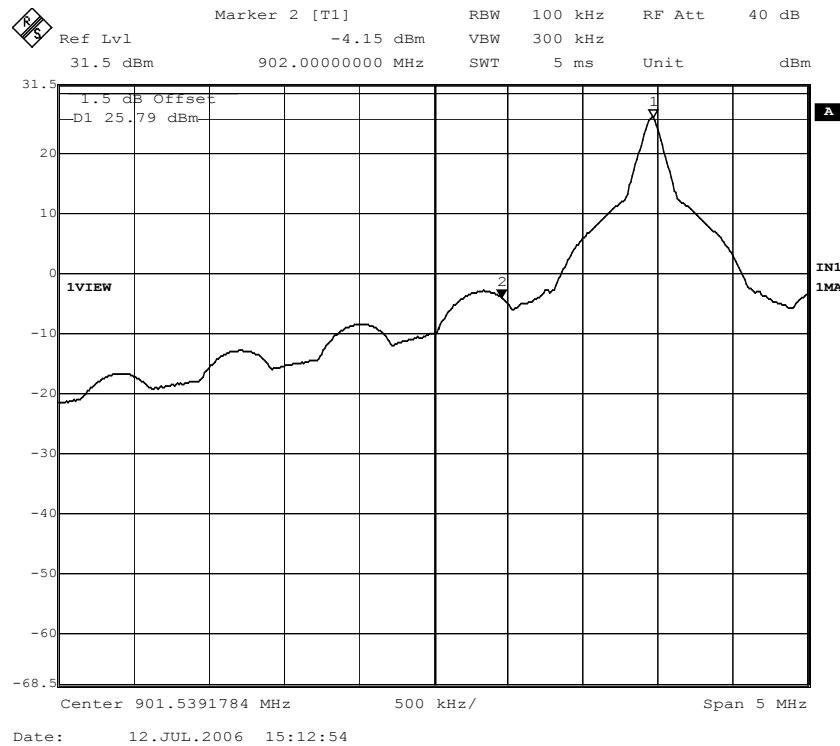


Figure 48. Band edge compliance; EPC Class 1 mode; Channel 1, hopping disabled.

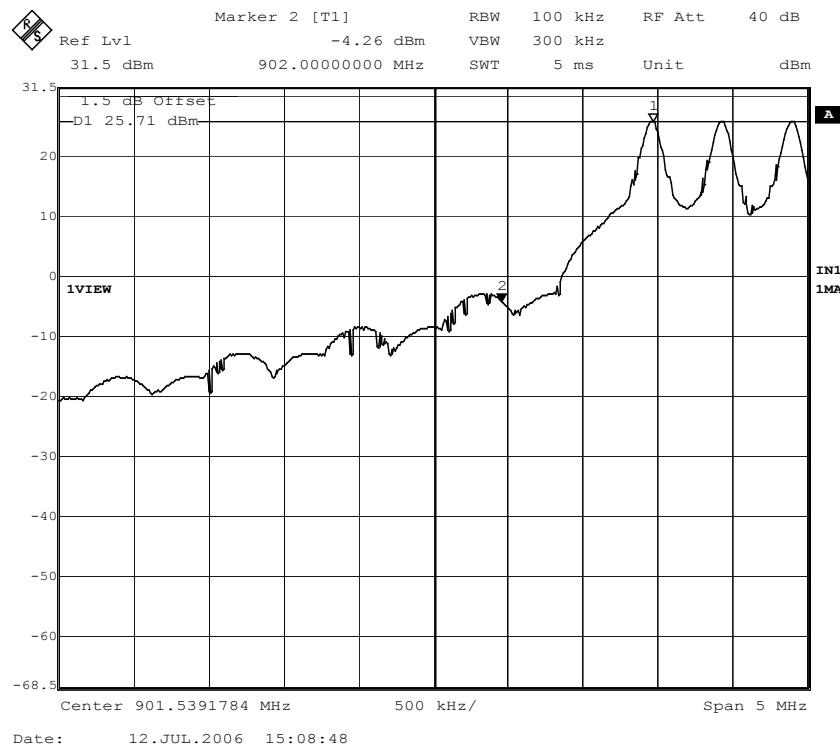


Figure 49. Band edge compliance; EPC Class 1 mode; Channel 1, hopping enabled.

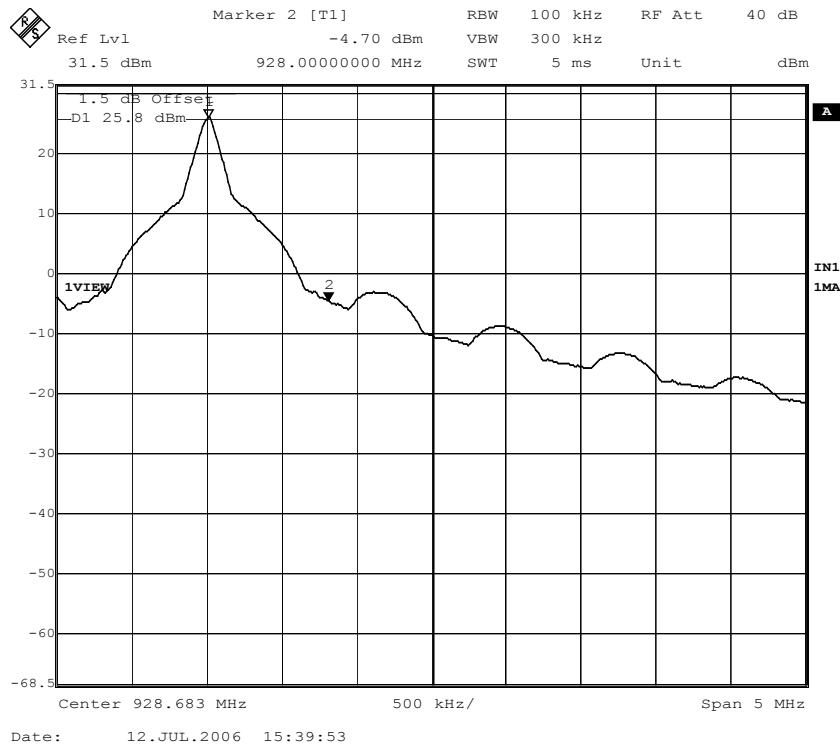


Figure 50. Band edge compliance; EPC Class 1 mode; Channel 53, hopping disabled.

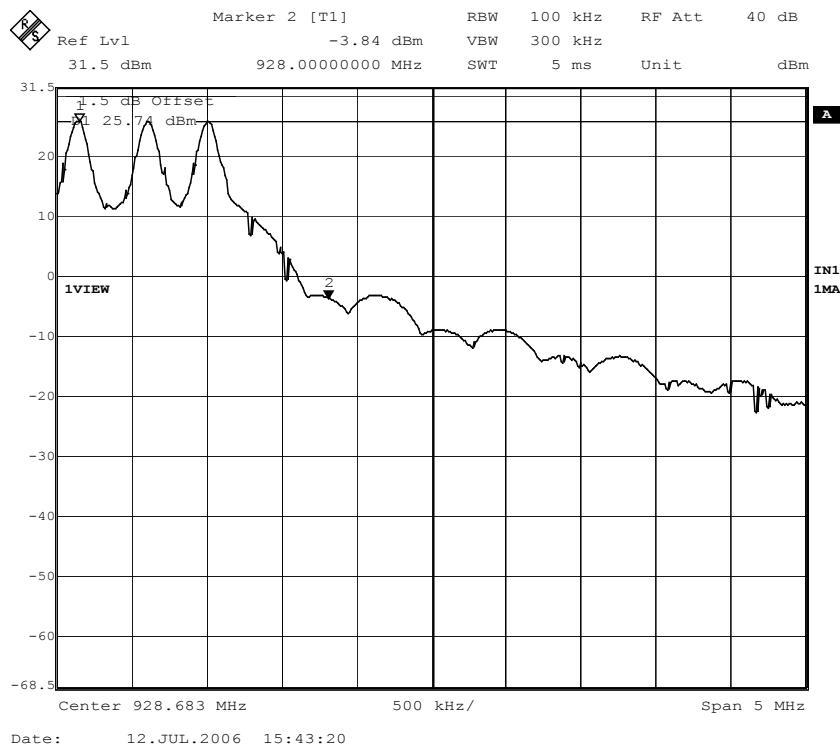


Figure 51. Band edge compliance; EPC Class 1 mode; Channel 53, hopping enabled.

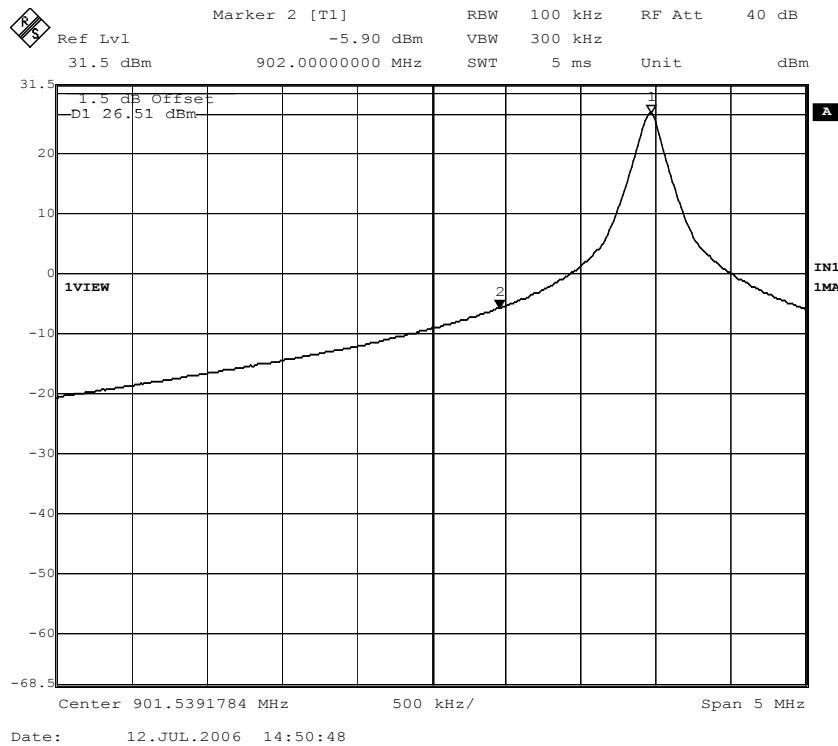


Figure 52. Band edge compliance; ISO 18000-6B mode; Channel 1, hopping disabled.

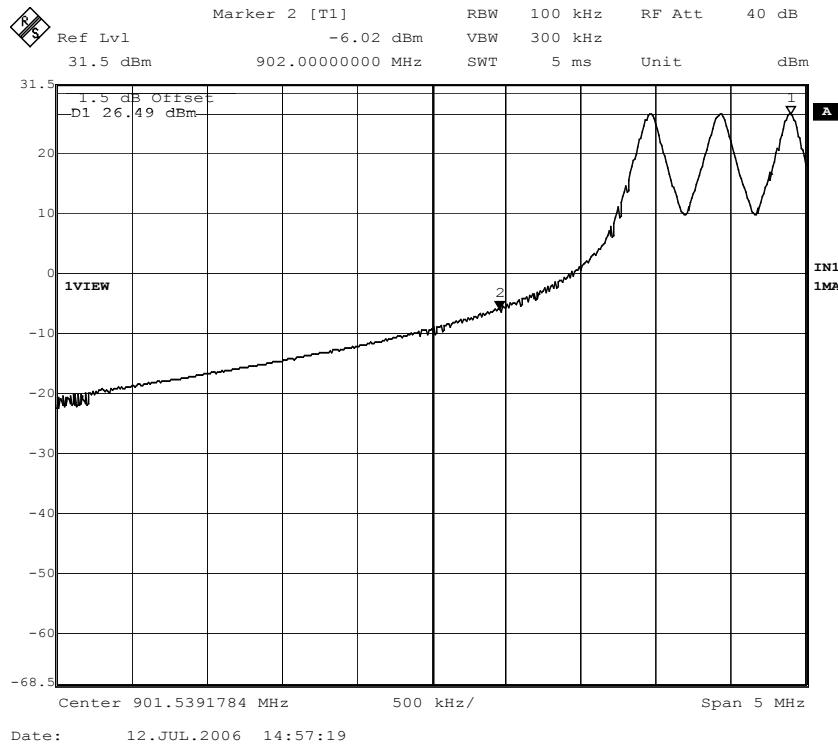


Figure 53. Band edge compliance; ISO 18000-6B mode; Channel 1, hopping enabled.

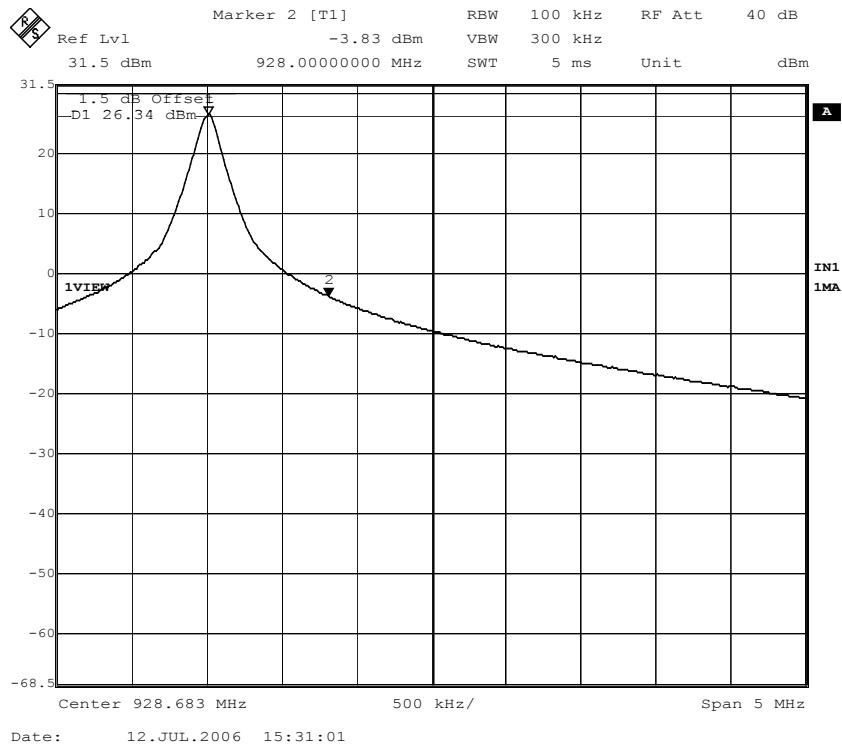


Figure 54. Band edge compliance; ISO 18000-6B mode; Channel 53, hopping disabled.

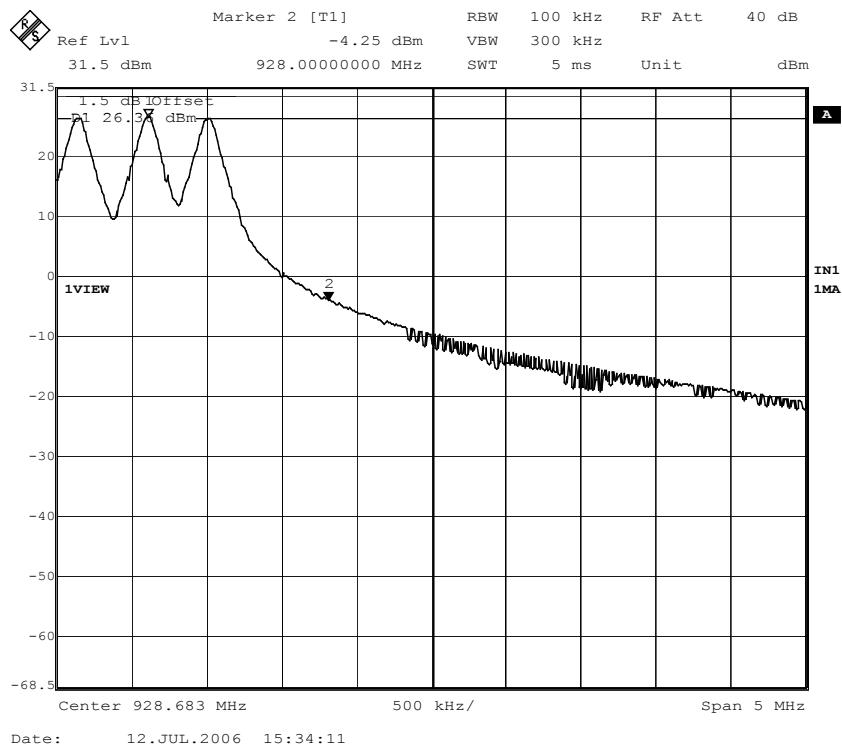


Figure 55. Band edge compliance; ISO 18000-6B mode; Channel 53, hopping enabled.

8.7 RADIATED SPURIOUS EMISSIONS

Criteria for Radiated Spurious Emissions [1]: The radiated spurious emissions of the transmitter shall not exceed the values in Table 3.

| Frequency Range (MHz) | Limit (dB(μ V/m)) | Measurement Distance (m) |
|-----------------------|---|--------------------------|
| 1.705 - 30 | 29.5 | 30 |
| 30 - 88 | 40 | 3 |
| 88 - 216 | 43.5 | 3 |
| 216 - 960 | 46 | 3 |
| 960 - 1000 | 54 | 3 |
| Above 1000 | 54 (average detector) 74 (peak detector) | 3 |

Table 3. Limits for spurious emissions.

Test Procedure for Radiated Spurious Emissions: Radiated spurious emissions were measured in Lexmark's 10 meter semi-anechoic chamber. This facility is registered with the FCC (registration number 949691) and Industry Canada (reference file number IC 2376).

The EUT configuration shown in Section 5 was placed atop a 0.8 meter high wooden table with a rectangular surface measuring 1.5m x 1.0m. The test setup is shown in Figures 56 and 57.

The receiving antenna was connected to a spectrum analyzer. While the spectrum analyzer was in peak hold mode, the EUT configuration was rotated continuously and the antenna scanned from 1 - 4 meters in height. After obtaining a plot of the peak emissions, those emissions close to the limit were investigated using either the quasi-peak or average detector, as required.

For measurements below 30 MHz, a calibrated loop antenna was used. The antenna was located 10 meters from the EUT with a height of the center of the loop antenna at 1 meter. The axis of the antenna was rotated to maximize the emissions. Since the limits in Table 3 for emissions below 30 MHz are specified at 30 meters, and measurements were made at 10 meters, the limit is translated to 10 meters by using a $1/r^2$ relationship, or 40 dB/decade.

The EUT was exercised by continuously transmitting on either the low, middle or high channel. During this testing, the printer was also printing so that this unintentional radiator mode was tested.

Results for Radiated Spurious Emissions: Tables 4 - 10 contain data on the radiated spurious emissions of significant amplitude from the EUT configuration shown in Section 5. The frequency range from 16 MHz - 10 GHz was investigated for spurious emissions. This data indicates that the EUT met the requirements for radiated spurious emissions. The EUT also met the FCC Class B limits specified for unintentional radiators.

| Frequency (MHz) | Polarization | Cable Loss (dB) | Antenna Factor (dB(1/m)) | Quasi-peak Amplitude (dB(μV/m)) | Quasi-peak Limit (dB(μV/m)) | Quasi-peak Margin (dB) |
|-----------------|--------------|-----------------|--------------------------|---------------------------------|-----------------------------|------------------------|
| 124.926 | V | 7.89 | 11.58 | 33.39 | 43.5 | 10.11 |
| 139.635 | H | 7.88 | 11.45 | 30.28 | 43.5 | 13.22 |
| 143.974 | H | 7.89 | 11.29 | 32.68 | 43.5 | 10.82 |
| 250.026 | H | 8.77 | 12.65 | 39.77 | 46 | 6.23 |
| 299.845 | V | 8.88 | 13.25 | 36.28 | 46 | 9.72 |
| 499.965 | V | 9.89 | 17.98 | 38.13 | 46 | 7.87 |

Table 4. Results for radiated spurious emissions < 1 GHz; Channel 1.

| Frequency (MHz) | Polarization | Cable Loss (dB) | Antenna Factor (dB(1/m)) | Peak Amplitude (dB(μV/m)) | Peak Limit (dB(μV/m)) | Peak Margin (dB) | Average Amplitude (dB(μV/m)) | Average Limit (dB(μV/m)) | Average Margin (dB) |
|-----------------|--------------|-----------------|--------------------------|---------------------------|-----------------------|------------------|------------------------------|--------------------------|---------------------|
| 1589.2 | V | -24.93 | 25.2 | 49.06 | 74 | 24.94 | 26.26 | 54 | 27.74 |
| 1593.6 | H | -24.99 | 25.22 | 53.17 | 74 | 20.83 | 30.99 | 54 | 23.01 |
| 1596.8 | V | -25.08 | 25.23 | 49.19 | 74 | 24.81 | 29.44 | 54 | 24.56 |
| 2101.1 | H | -25.16 | 26.93 | 46.15 | 74 | 27.85 | 40.77 | 54 | 13.23 |
| 2394.5 | V | -24.84 | 27.9 | 51.35 | 74 | 22.65 | 31.43 | 54 | 22.57 |
| 4960.8 | H | -18.53 | 33.68 | 54.01 | 74 | 19.99 | 39.61 | 54 | 14.39 |

Table 5. Results for radiated spurious emissions > 1 GHz; Channel 1.

| Frequency (MHz) | Polarization | Cable Loss (dB) | Antenna Factor (dB(1/m)) | Quasi-peak Amplitude (dB(μV/m)) | Quasi-peak Limit (dB(μV/m)) | Quasi-peak Margin (dB) |
|-----------------|--------------|-----------------|--------------------------|---------------------------------|-----------------------------|------------------------|
| 33.934 | V | 6.93 | 16.78 | 29.67 | 40 | 10.33 |
| 125 | V | 7.89 | 11.59 | 31.22 | 43.5 | 12.28 |
| 143.933 | H | 7.89 | 11.29 | 33.1 | 43.5 | 10.4 |
| 185.667 | H | 8.18 | 8.74 | 30.23 | 43.5 | 13.27 |
| 250.006 | H | 8.77 | 12.65 | 41.23 | 46 | 4.77 |
| 839.114 | H | 13.48 | 23.07 | 36.33 | 46 | 9.67 |

Table 6. Results for radiated spurious emissions < 1 GHz; Channel 26.

| Frequency (MHz) | Polarization | Cable Loss (dB) | Antenna Factor (dB(1/m)) | Peak Amplitude (dB(μV/m)) | Peak Limit (dB(μV/m)) | Peak Margin (dB) | Average Amplitude (dB(μV/m)) | Average Limit (dB(μV/m)) | Average Margin (dB) |
|-----------------|--------------|-----------------|--------------------------|---------------------------|-----------------------|------------------|------------------------------|--------------------------|---------------------|
| 1599.7 | H | -25.08 | 25.24 | 52.03 | 74 | 21.97 | 28.76 | 54 | 25.24 |
| 1800.7 | V | -25.45 | 25.92 | 44.45 | 74 | 29.55 | 37.45 | 54 | 16.55 |
| 1829.2 | V | -25.37 | 26.02 | 57.69 | 74 | 16.31 | 47.83 | 54 | 6.17 |
| 1829.4 | H | -25.37 | 26.02 | 53.32 | 74 | 20.68 | 43.21 | 54 | 10.79 |
| 2101.2 | V | -25.16 | 26.93 | 46.82 | 74 | 27.18 | 41.48 | 54 | 12.52 |
| 2387.5 | H | -24.89 | 27.88 | 52.15 | 74 | 21.85 | 31.98 | 54 | 22.02 |
| 4969.7 | V | -18.62 | 33.71 | 53.55 | 74 | 20.45 | 41.78 | 54 | 12.22 |

Table 7. Results for radiated spurious emissions > 1 GHz; Channel 26.

| Frequency (MHz) | Polarization | Cable Loss (dB) | Antenna Factor (dB(1/m)) | Quasi-peak Amplitude (dB(μV/m)) | Quasi-peak Limit (dB(μV/m)) | Quasi-peak Margin (dB) |
|-----------------|--------------|-----------------|--------------------------|---------------------------------|-----------------------------|------------------------|
| 33.924 | V | 6.93 | 16.79 | 31.24 | 40 | 8.76 |
| 125.016 | H | 7.89 | 11.59 | 28.96 | 43.5 | 14.54 |
| 138.994 | H | 7.88 | 11.47 | 30.87 | 43.5 | 12.63 |
| 143.823 | H | 7.89 | 11.3 | 37.82 | 43.5 | 5.68 |
| 250.016 | H | 8.77 | 12.65 | 38.33 | 46 | 7.67 |
| 337.421 | V | 9.13 | 13.95 | 31.7 | 46 | 14.3 |

Table 8. Results for radiated spurious emissions < 1 GHz; Channel 53.

| Frequency (MHz) | Polarization | Cable Loss (dB) | Antenna Factor (dB(1/m)) | Peak Amplitude (dB(μV/m)) | Peak Limit (dB(μV/m)) | Peak Margin (dB) | Average Amplitude (dB(μV/m)) | Average Limit (dB(μV/m)) | Average Margin (dB) |
|-----------------|--------------|-----------------|--------------------------|---------------------------|-----------------------|------------------|------------------------------|--------------------------|---------------------|
| 1590.8 | V | -25.02 | 25.21 | 48.73 | 74 | 25.27 | 27.27 | 54 | 26.73 |
| 1854.5 | V | -25.4 | 26.11 | 58.27 | 74 | 15.73 | 48.58 | 54 | 5.42 |
| 2392.1 | V | -24.9 | 27.89 | 50.1 | 74 | 23.9 | 29.34 | 54 | 24.66 |

Table 9. Results for radiated spurious emissions > 1 GHz; Channel 53.

| Frequency (MHz) | Polarization | Cable Loss (dB) | Antenna Factor (dB(1/m)) | Quasi-peak Amplitude (dB(μV/m)) | Quasi-peak Limit (dB(μV/m)) | Quasi-peak Margin (dB) |
|-----------------|--------------|-----------------|--------------------------|---------------------------------|-----------------------------|------------------------|
| 33.904 | V | 6.87 | 16.8 | 30.83 | 40 | 9.17 |
| 137.932 | H | 7.76 | 11.51 | 31.49 | 43.5 | 12.01 |
| 143.923 | H | 7.78 | 11.29 | 32.79 | 43.5 | 10.71 |
| 250.026 | H | 8.64 | 12.65 | 38.69 | 46 | 7.31 |
| 530.417 | V | 9.8 | 18.16 | 31.55 | 46 | 14.45 |
| 927.2 | H | 11.02 | 23.96 | 44.51 | 46 | 1.49 |

Table 10. Results for radiated spurious emissions < 1 GHz; standby.



Figure 56. Test configuration for transmitter spurious emissions (front view).



Figure 57. Test configuration for transmitter spurious emissions (back view).

8.8 CONDUCTED EMISSIONS

Criteria for Conducted Emissions [1]: The emissions conducted onto the AC power line by the EUT shall not exceed the values in Table 11.

| Frequency Range (MHz) | Quasi-peak Limit (dB(μV)) | Average Limit (dB(μV)) |
|-----------------------|---------------------------|------------------------|
| 0.15 - 0.5 | 66 to 56 | 56 to 46 |
| 0.5 - 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |

Table 11. Limits for conducted emissions.

Test Procedure for Conducted Emissions: The test configuration shown in Figures 58 and 59 was used for this testing. Conducted emissions testing was performed in an 18 ft. x 18 ft. all-welded shielded room located at Lexmark International's EMC test facilities. This facility is registered with the FCC (registration number 949691).

The EUT configuration shown in Section 5 was placed atop a 0.8 meter high wooden table with a rectangular surface measuring 1.5m x 1.0m. The back edges of all devices were located 40 cm from the metal wall of the shielded room.

The AC line cord of the EUT was plugged into the LISN (Line Impedance Stabilization Network) with the excess of the EUT line cord length bundled in the center. The USB, parallel and network cables were draped down from the rear of the EUT and PC, but hung no closer than 40 cm to the floor (ground plane). The excess of these cables were serpentine to form a bundle 30-40 cm in length, with the overall length of the cable not to exceed 1.0 meter in length

The EUT was exercised by continuously transmitting on either the low, middle or high channel. During this testing, the printer was also printing so that this unintentional radiator mode was tested.

Results for Conducted Emissions: Tables 12 - 14 contain the conducted emission results for the, low, middle and high channels. The EUT met the requirements for conducted emissions given in Table 11. The EUT also met the FCC Class B limits specified for unintentional radiators.

| Frequency (MHz) | Line | Correction Factors (dB) | Quasi-peak Amplitude (dB(µV)) | Quasi-peak Limit (dB(µV)) | Quasi-peak Margin (dB) | Average Amplitude (dB(µV)) | Average Limit (dB(µV)) | Average Margin (dB) |
|-----------------|------|-------------------------|-------------------------------|---------------------------|------------------------|----------------------------|------------------------|---------------------|
| 0.194 | N | 10.69 | 53.92 | 64.74 | 10.82 | 47.46 | 54.74 | 7.28 |
| 0.195 | P | 10.69 | 55.78 | 64.73 | 8.95 | 47.73 | 54.73 | 7.0 |
| 0.454 | P | 10.16 | 41.26 | 57.32 | 16.06 | 31.71 | 47.32 | 15.61 |
| 0.518 | N | 10.15 | 43.73 | 56 | 12.27 | 32.65 | 46 | 13.35 |
| 0.646 | P | 10.16 | 40.3 | 56 | 15.7 | 24.85 | 46 | 21.15 |
| 0.712 | N | 10.15 | 39.81 | 56 | 16.19 | 26.52 | 46 | 19.48 |

Table 12. Results for conducted emissions; Channel 1.

| Frequency (MHz) | Line | Correction Factors (dB) | Quasi-peak Amplitude (dB(µV)) | Quasi-peak Limit (dB(µV)) | Quasi-peak Margin (dB) | Average Amplitude (dB(µV)) | Average Limit (dB(µV)) | Average Margin (dB) |
|-----------------|------|-------------------------|-------------------------------|---------------------------|------------------------|----------------------------|------------------------|---------------------|
| 0.194 | P | 10.69 | 54.21 | 64.74 | 10.53 | 47.63 | 54.74 | 7.11 |
| 0.325 | N | 10.18 | 41.8 | 61.01 | 19.21 | 39.61 | 51.01 | 11.1 |
| 0.389 | P | 10.16 | 42.49 | 59.16 | 16.67 | 35.98 | 49.16 | 13.18 |
| 0.583 | P | 10.15 | 43.67 | 56 | 12.33 | 30.11 | 46 | 15.89 |
| 0.649 | P | 10.16 | 25.88 | 56 | 30.12 | 24.93 | 46 | 21.07 |
| 17.746 | P | 10.78 | 36.56 | 60 | 23.44 | 29.08 | 50 | 20.92 |

Table 13. Results for conducted emissions; Channel 26.

| Frequency (MHz) | Line | Correction Factors (dB) | Quasi-peak Amplitude (dB(µV)) | Quasi-peak Limit (dB(µV)) | Quasi-peak Margin (dB) | Average Amplitude (dB(µV)) | Average Limit (dB(µV)) | Average Margin (dB) |
|-----------------|------|-------------------------|-------------------------------|---------------------------|------------------------|----------------------------|------------------------|---------------------|
| 0.195 | N | 10.69 | 54.79 | 64.72 | 9.93 | 47.63 | 54.72 | 7.09 |
| 0.196 | P | 10.69 | 54.67 | 64.69 | 10.02 | 47.34 | 54.69 | 7.35 |
| 0.214 | P | 10.69 | 36.26 | 64.17 | 27.91 | 13.34 | 54.17 | 40.83 |
| 0.26 | P | 10.24 | 45.6 | 62.87 | 17.27 | 41.84 | 52.87 | 11.03 |
| 0.324 | P | 10.18 | 43.17 | 61.04 | 17.87 | 39.62 | 51.04 | 11.42 |
| 0.518 | P | 10.15 | 40.57 | 56 | 15.43 | 31.86 | 46 | 14.14 |

Table 14. Results for conducted emissions; Channel 53.

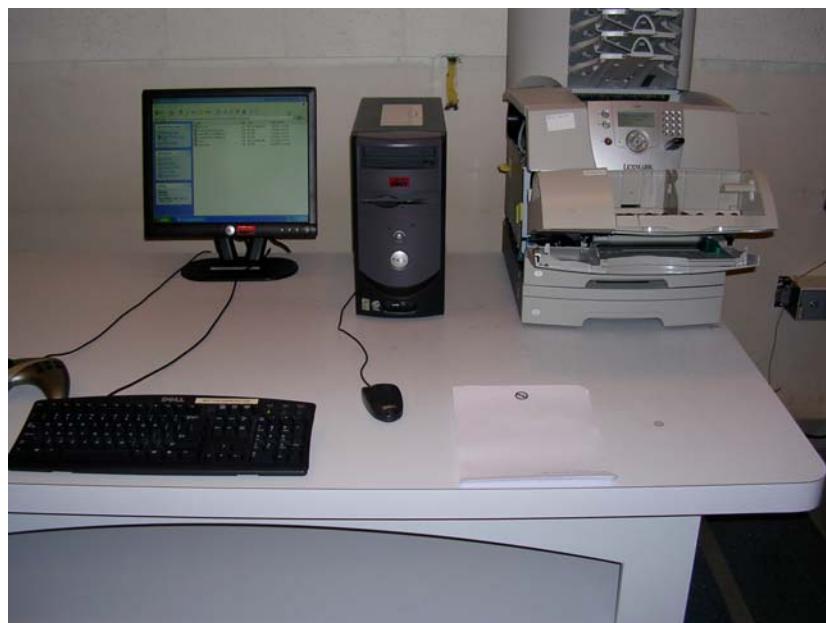


Figure 58. Test configuration for transmitter conducted emissions (front view).



Figure 59. Test configuration for transmitter conducted emissions (side view).

8.9 MAXIMUM PERMISSIBLE EXPOSURE CALCULATIONS

Test Procedure for Maximum Permissible Exposure: Using the power measurements previously reported in this report, the power density at a distance of 20 cm from the EUT must be calculated.

The power density at a distance d from an antenna can be calculated from the following equation:

$$s = \frac{P_{inc} G}{4\pi d^2}$$

where P_{inc} is the power incident to the antenna and G is the gain of the antenna. From the conducted power measurements previously reported, the maximum for all modes of operation is 26.23 dBm (419.76 mW). Given the gain of the antenna to be -1 dBi (0.794), the power density at a distance of 20 cm from the EUT is given by:

$$s = \frac{(419.76mW)(0.794)}{4\pi(20cm)^2} = \frac{0.0663mW}{cm^2}$$

It is expected that due to the nature of the EUT, the user will be located at least 20 cm from the EUT.

Criteria for Maximum Permissible Exposure: Per §1.1310 of the FCC Rules, the limit of radiation exposure for a device operating in the frequency range of 902 - 928 MHz under the Limits for General Population/Uncontrolled Exposure, the maximum power density is 0.61 mW/cm². The EUT was well below this value for separation distances of 20 cm or greater.

NOTE:

The following conditions apply to this report:

This report shall not be --

- 1. reproduced without the permission of the Lexmark EMC Department, nor**
- 2. reproduced, except in full.**