

BUREAU  
VERITAS

Test Report No.: W7L-P230608W002EM01



Certificate #6613.01

## EMC TEST REPORT

Applicant:	Marquardt GmbH
Address:	Schloss-str.16,78604 Rietheim-Weilheim,Germany

Manufacturer or Supplier:	Marquardt GmbH
Address:	Schloss-str.16,78604 Rietheim-Weilheim,Germany
Product:	Lotus keyfob
Brand Name:	Marquardt
Model Name:	GK1
FCC ID:	IYZGK1
Date of tests:	Jun. 08, 2023 ~ Aug. 19, 2023

The submitted sample of the above equipment has been tested for according to the requirements of the following standards:

FCC Part 15, Subpart B, Class A  
 FCC Part 15, Subpart B, Class B  
 ANSI C63.4:2014

### CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Chao Wu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
 Date: Aug. 19, 2023	 Date: Aug. 19, 2023

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



## TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD .....</b>	<b>3</b>
<b>1 GENERAL INFORMATION .....</b>	<b>4</b>
1.1 GENERAL DESCRIPTION OF EUT .....	4
1.2 SUMMARY OF TEST RESULTS .....	5
1.3 MEASUREMENT UNCERTAINTY .....	5
1.4 DESCRIPTION OF TEST MODES .....	6
1.5 DESCRIPTION OF SUPPORT UNITS .....	7
<b>2 EMISSION TEST .....</b>	<b>8</b>
2.1 RADIATED EMISSION MEASUREMENT .....	8
2.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	8
2.1.2 TEST INSTRUMENTS .....	9
2.1.3 TEST PROCEDURE .....	10
2.1.4 DEVIATION FROM TEST STANDARD .....	11
2.1.5 TEST SETUP .....	12
2.1.6 EUT OPERATING CONDITIONS .....	12
2.1.7 TEST RESULTS .....	13
<b>3 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>17</b>



BUREAU  
VERITAS

Test Report No.: W7L-P230608W002EM01

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P230608W002EM01	Original release	Aug. 19, 2023



BUREAU  
VERITAS

Test Report No.: W7L-P230608W002EM01

## 1 GENERAL INFORMATION

### 1.1 GENERAL DESCRIPTION OF EUT

PRODUCT*	Lotus keyfob	
BRAND NAME*	Marquardt	
MODEL NAME*	GK1	
NOMINAL VOLTAGE*	3.0Vdc (battery)	
MODULATION TYPE*	BT_LE	GFSK
	UWB	BPM-BPSK
OPERATING FREQUENCY	BT_LE	2402MHz ~ 2480MHz
	UWB	CH5: 6489.6MHz/ CH9: 7987.2MHz
HW VERSION*	232605	
SW VERSION*	232401	
I/O PORTS*	Refer to user's manual	
CABLE SUPPLIED*	N/A	

#### NOTE:

- \*Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information , Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

#### 4. List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
Lithium Battery	Panasonic	Panasonic Corporation	CR2032	Capacity:3.0 Vdc, 225mAh



## 1.2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart B		
Standard Section	Test Item	Result
FCC Part 15, Subpart B, Class B ANSI C63.4:2014	Conducted Test	Note
	Radiated Emission Test (30MHz ~ 1GHz)	Compliance
	Radiated Emission Test (Above 1GHz)	Compliance

Note:

1. Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

## 1.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	30MHz~1GHz	±4.98dB
	1GHz ~6GHz	±4.70dB
	6GHz ~18GHz	±4.60dB
	18GHz ~40GHz	±4.12dB



BUREAU  
VERITAS

Test Report No.: W7L-P230608W002EM01

## 1.4 DESCRIPTION OF TEST MODES

Test Mode	Test Condition
<b>Radiated emission test</b>	
1	Powered by battery+ EUT

### NOTE:

1. For radiated emission test, Pre-scan all mode, test mode 1 was the worst case and only this mode was presented in this report.
2. The EUT is powered by button battery, the button battery is continuously fixed and pressed.



BUREAU  
VERITAS

Test Report No.: W7L-P230608W002EM01

## 1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

### FOR ALL TESTS

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	N/A	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A



BUREAU  
VERITAS

Test Report No.: W7L-P230608W002EM01

## 2 EMISSION TEST

### 2.1 RADIATED EMISSION MEASUREMENT

#### 2.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

##### TEST STANDARD: FCC PART 15, SUBPART B (SECTION: 15.109)

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 3 meters (dB $\mu$ V/m)		
Frequencies (MHz)	FCC 15B, Class A	FCC 15B, Class B
30-88	49	40
88-216	53.5	43.5
216-960	56	46
960-1000	59.5	54
Above 1000	Avg: 59.5 Peak: 79.5	Avg: 54 Peak: 74

##### Frequency Range (For unintentional radiators)

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40GHz, whichever is lower

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. QP detector shall be applied if not specified.



## 2.1.2 TEST INSTRUMENTS

### Frequency range below 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
WIDEBANDRADIO COMMUNICATION TESTER	Rohde&Schwarz	CMW500	169399	Jun.27,22	Jun.26,24
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02 Chamber	Nov.24,22	Nov.23,25
Bilog Antenna	SCHWARZBEC K	VULB 9163	1264	Feb.28,22	Feb.27,24
EMI Test Receiver	R&S	ESW44	101973	Feb.25,22	Feb.24,24
Measurement Software	R&S	ELEKTRA	N/A	N/A	N/A
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
CABLE	R&S	W13.01	N/A	Apr.28,23	Oct.27,23
CABLE	R&S	W13.02	N/A	Apr.28,23	Oct.27,23
CABLE	R&S	W12.14	N/A	Apr.28,23	Oct.27,23

### Frequency range above 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
WIDEBANDRADIO COMMUNICATION TESTER	Rohde&Schwarz	CMW500	169399	Jun.27,22	Jun.26,24
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01 Chamber	Nov.24,22	Nov.23,25
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,22	Aug.21,24
EMI Test Receiver	R&S	ESW44	101973	Feb.25,22	Feb.24,24
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Measurement Software	R&S	ELEKTRA	N/A	N/A	N/A
CABLE	R&S	W13.01	N/A	Apr.28,23	Oct.27,23
CABLE	R&S	W13.02	N/A	Apr.28,23	Oct.27,23
CABLE	R&S	W12.14	N/A	Apr.28,23	Oct.27,23

**NOTE:** 1. The calibration interval of the above test instruments is 6 months or 24 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRRG/CHINA and NIM/CHINA.  
2. The test was performed in 3m chamber.  
3. The FCC Site Registration No. is 434559; The Designation No. is CN1325.



## 2.1.3 TEST PROCEDURE

### <Frequency Range below 1GHz>

The basic test procedure was in accordance with ANSI C63.4:2014 (section 12).

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.

#### NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
3. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) (if the raw value not contains the amplifier);
4. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB) (if the raw value contains the amplifier).
5. Margin value = Emission level – Limit value.



### <Frequency Range above 1GHz>

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. The bore sight should be used during the test above 1GHz.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz

#### NOTE:


- . The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- . The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth of test receiver/spectrum analyzer is 1Hz for Average detection (AV) at frequency above 1GHz.
- . For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the receiver antenna.
- . Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- . Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) (if the raw value not contains the amplifier);
- . Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB) (if the raw value contains the amplifier)
- . Margin value = Emission level – Limit value.

### 2.1.4 DEVIATION FROM TEST STANDARD


No deviation.

## 2.1.5 TEST SETUP

### <Frequency Range below 1GHz>

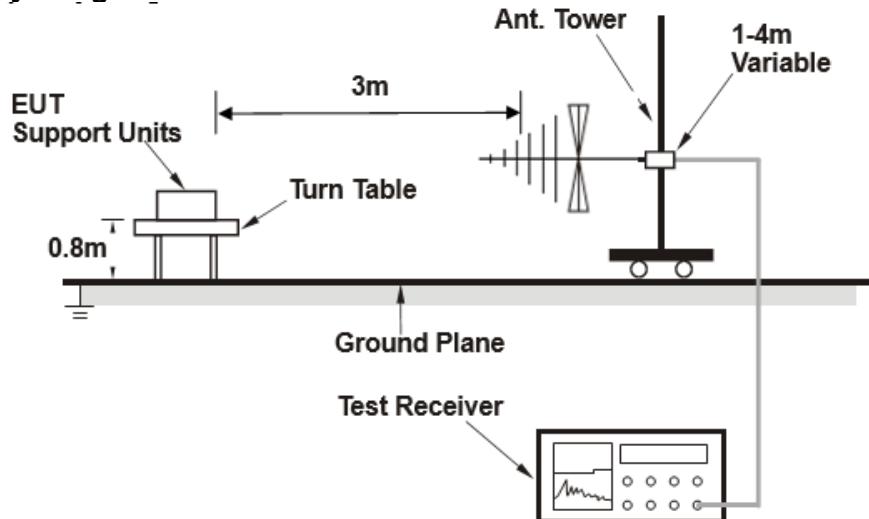

### <Frequency Range above 1GHz>

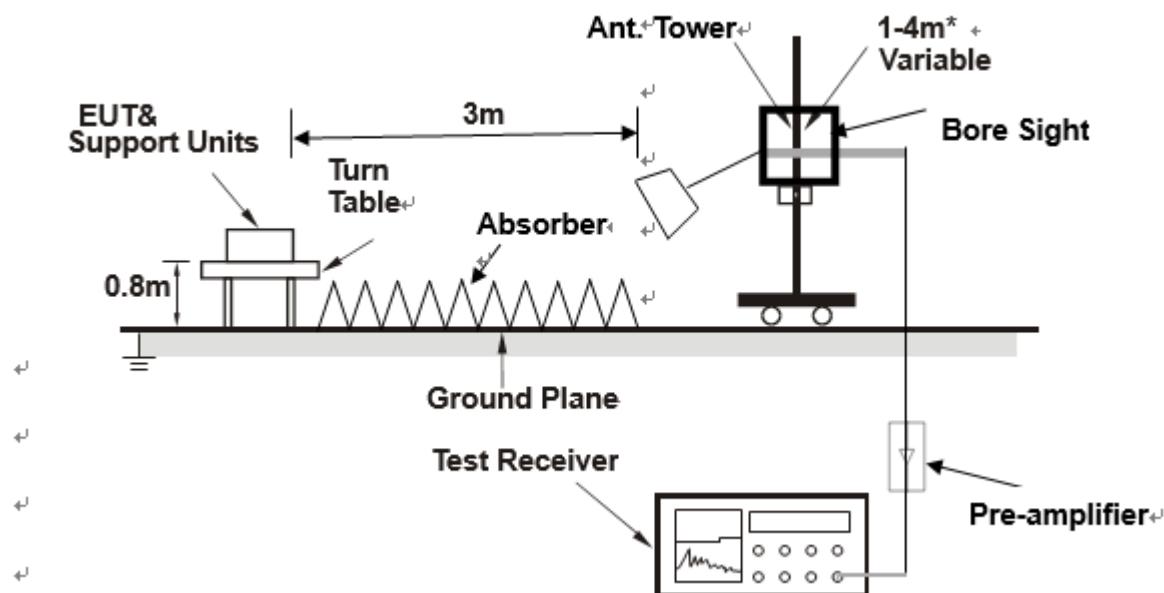

**Note:** Above 1G is a directional antenna

depends on the EUT height and the antenna 3dB bandwidth both, refer to section 7.3 of CISPR 16-2-3.

## 2.1.6 EUT OPERATING CONDITIONS

- Turned on the power and connected of all equipment.
- EUT was operated according to the use type described in the manufacturer's specifications or the user's manual.



BUREAU  
VERITAS

Test Report No.: W7L-P230608W002EM01

## 2.1.7 TEST RESULTS

Acceleromete alternative worst case:


TEST VOLTAGE	DC 3.0V	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120 kHz
TESTED BY	Chao Wu		

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Freq	Level	Read	Limit	Over	Factor	Remark	Pol/Phase
		Level	Line	Limit			
MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1 PP	52.310	23.47	50.08	40.00	-16.53	-26.61	Peak
2	252.130	12.43	34.34	46.00	-33.57	-21.91	Peak
3	422.850	24.81	43.54	46.00	-21.19	-18.73	Peak
4	594.540	20.69	36.57	46.00	-25.31	-15.88	Peak
5	756.530	25.04	38.65	46.00	-20.96	-13.61	Peak
6	902.030	27.11	39.17	46.00	-18.89	-12.06	Peak

**REMARKS:**

1. Emission level(dBuV/m)=Read Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)- Amplifier Gain
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

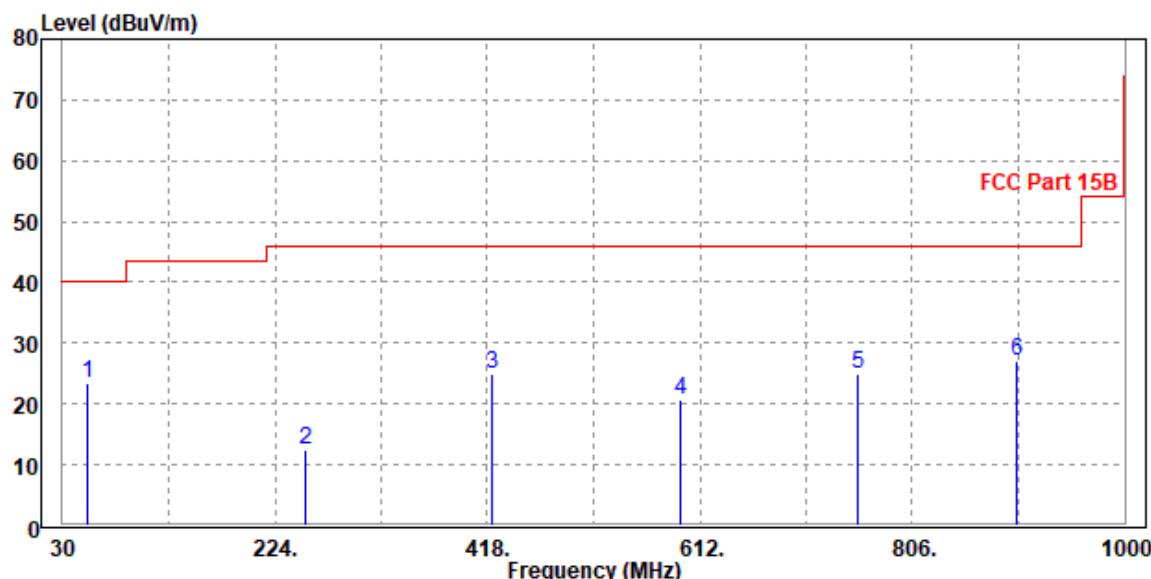



BUREAU  
VERITAS

Test Report No.: W7L-P230608W002EM01


TEST VOLTAGE	DC 3.0V	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70% RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak , 120 kHz
TESTED BY	Chao Wu		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Freq	Level	Read	Limit	Over	Factor	Remark	Pol/Phase
		Level	Line	Limit			
MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	52.310	16.87	44.00	40.00	-23.13	-27.13	Peak Vertical
2	200.720	15.21	39.24	43.50	-28.29	-24.03	Peak Vertical
3	422.850	18.68	37.44	46.00	-27.32	-18.76	Peak Vertical
4	486.870	19.48	37.44	46.00	-26.52	-17.96	Peak Vertical
5	594.540	20.59	36.59	46.00	-25.41	-16.00	Peak Vertical
6 PP	902.030	27.85	40.61	46.00	-18.15	-12.76	Peak Vertical

REMARKS:

1. Emission level(dBuV/m)=Read Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) -Amplifier Gain
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

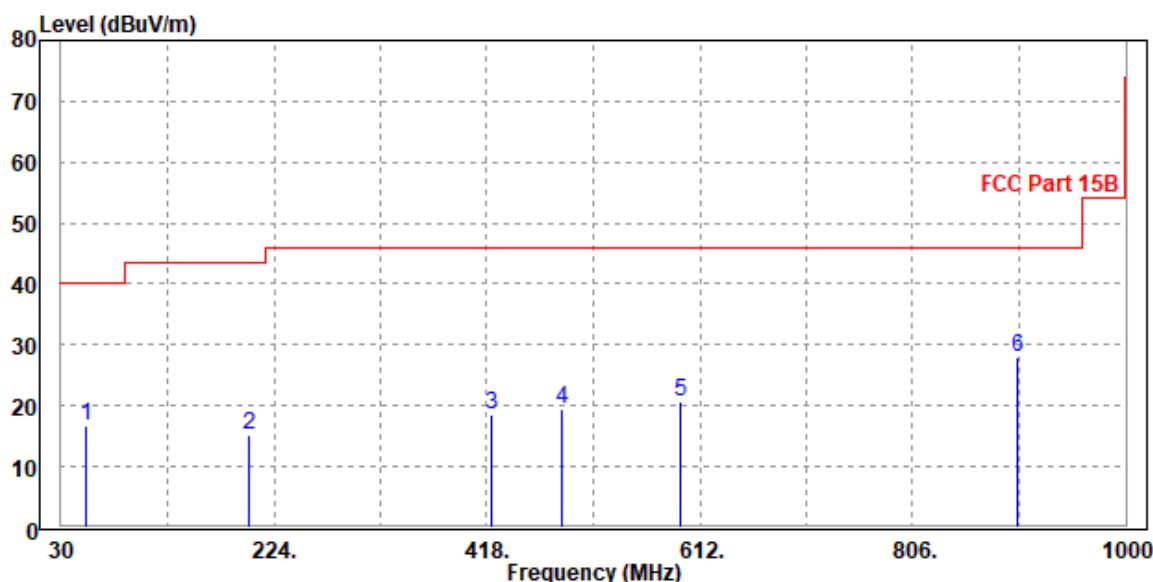



BUREAU  
VERITAS

Test Report No.: W7L-P230608W002EM01


Worst case above 1G:

TEST VOLTAGE	DC 3.0V	FREQUENCY RANGE	1-18 GHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Peak/Average, 1 MHz
TESTED BY	Chao Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
1799	52.28	60.87	74	-21.72	32.19	5.35	46.13	100	90	Peak
1799	33.26	41.85	54	-20.74	32.19	5.35	46.13	100	90	Average
3669	55.03	56.67	74	-18.97	35.93	7.91	45.48	100	165	Peak
3669	41.31	42.95	54	-12.69	35.93	7.91	45.48	100	165	Average
6882	51.79	48.08	74	-22.21	38.23	10.65	45.17	100	0	Peak
6882	43.41	39.7	54	-10.59	38.23	10.65	45.17	100	0	Average

**REMARKS:**

1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 1GHz to 5th harmonic of the highest frequency or 40GHz, whichever is lower .For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.
4. Only emissions significantly above equipment noise floor are reported.

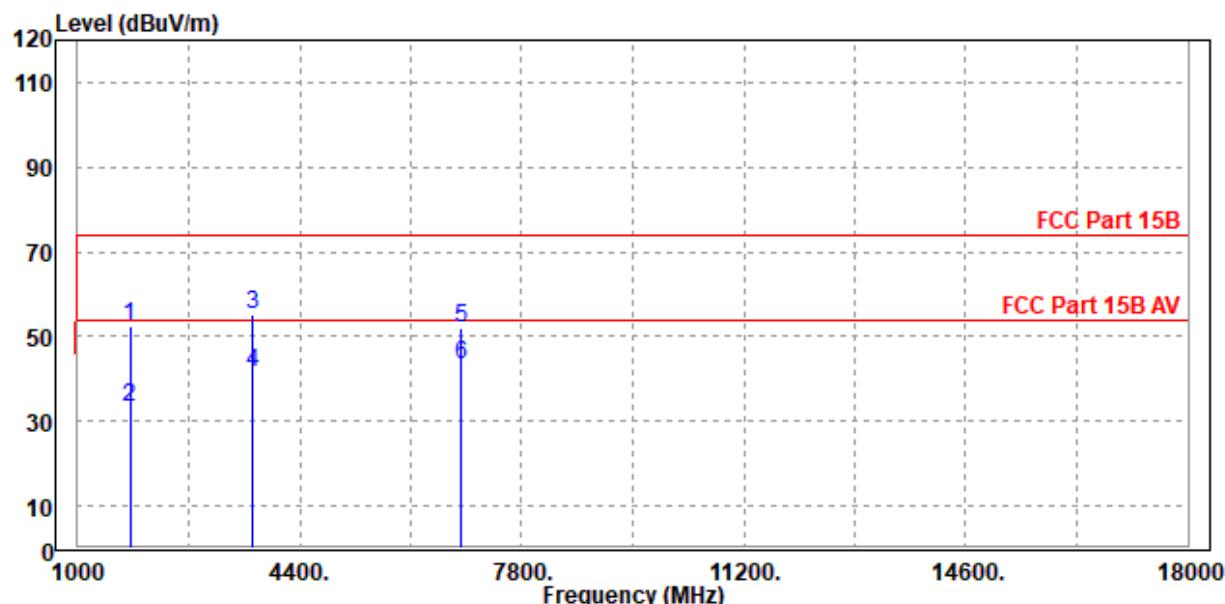



BUREAU  
VERITAS


Test Report No.: W7L-P230608W002EM01

TEST VOLTAGE	DC 3.0V	FREQUENCY RANGE	1-18 GHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Peak/Average, 1 MHz
TESTED BY	Chao Wu		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
1799	51.38	61	74	-22.62	31.16	5.35	46.13	100	85	Peak
1799	32.06	41.68	54	-21.94	31.16	5.35	46.13	100	85	Average
3669	53.38	56.68	74	-20.62	34.27	7.91	45.48	100	112	Peak
3669	40.35	43.65	54	-13.65	34.27	7.91	45.48	100	112	Average
6695	49.75	47.33	74	-24.25	37.16	10.5	45.24	100	60	Peak
6695	43.43	41.01	54	-10.57	37.16	10.5	45.24	100	60	Average

**REMARKS:**

1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 1GHz to 5th harmonic of the highest frequency or 40GHz, whichever is lower .For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.
4. Only emissions significantly above equipment noise floor are reported.

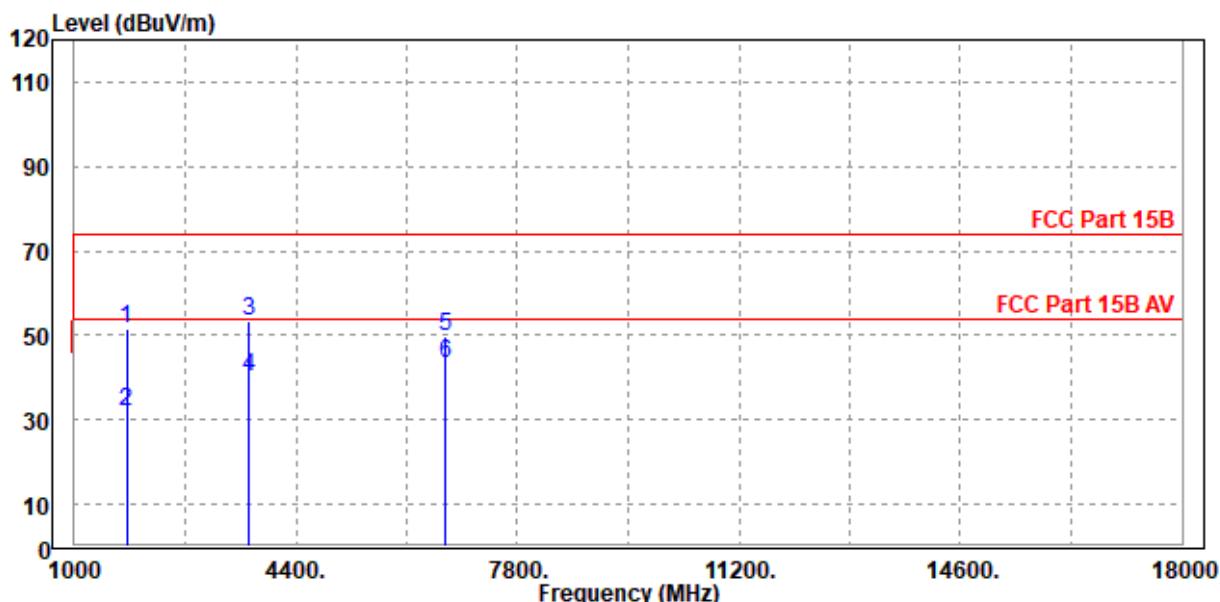



**BUREAU  
VERITAS** Test Report No.: W7L-P230608W002EM01

### **3 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications were made to the EUT by the lab during the test.

**--END--**