





Customer: N. A. T. S. (Knogo)
 Test Sample: Desktop Antitheft Tag Detection System
 Model No.: sht wrap desk
 Test Method: FCC 15.107 (a) Conducted Emissions 450 kHz to 30 MHz
 Notes: Lead Tested: Hot
 Detector Function: Peak

Date: February 17, 2000 Tech: N. Dragotta Sheet 1 of 6

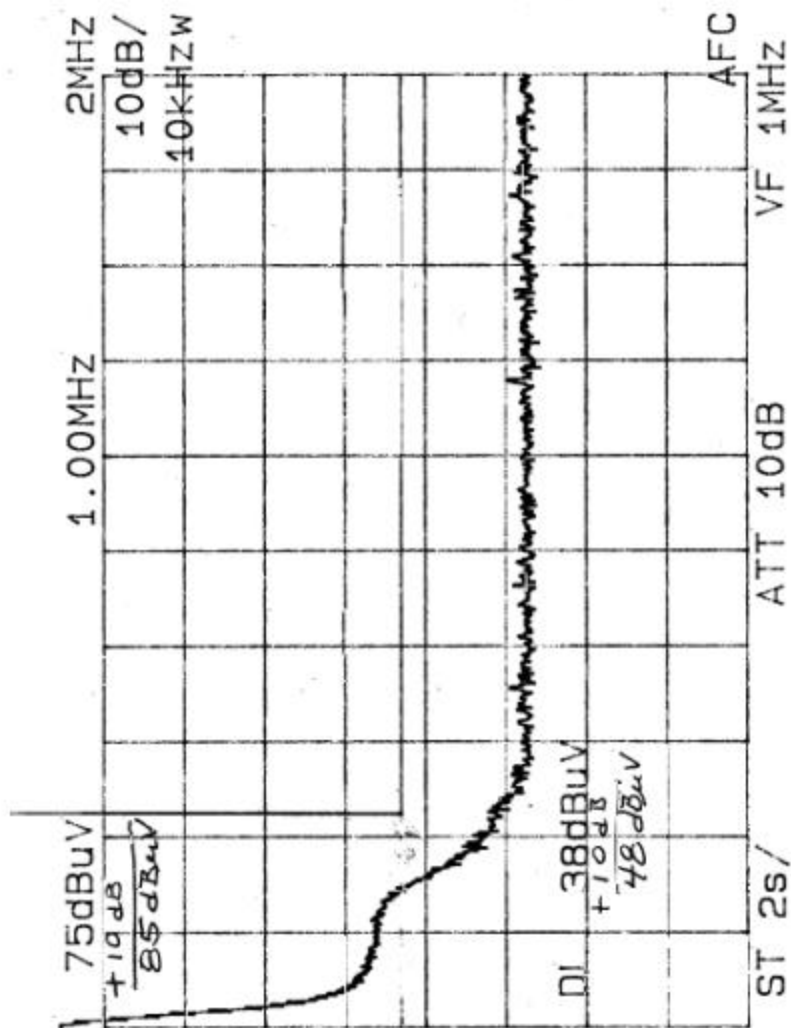

Retlif Testing Laboratories

Report No. R-8384-1

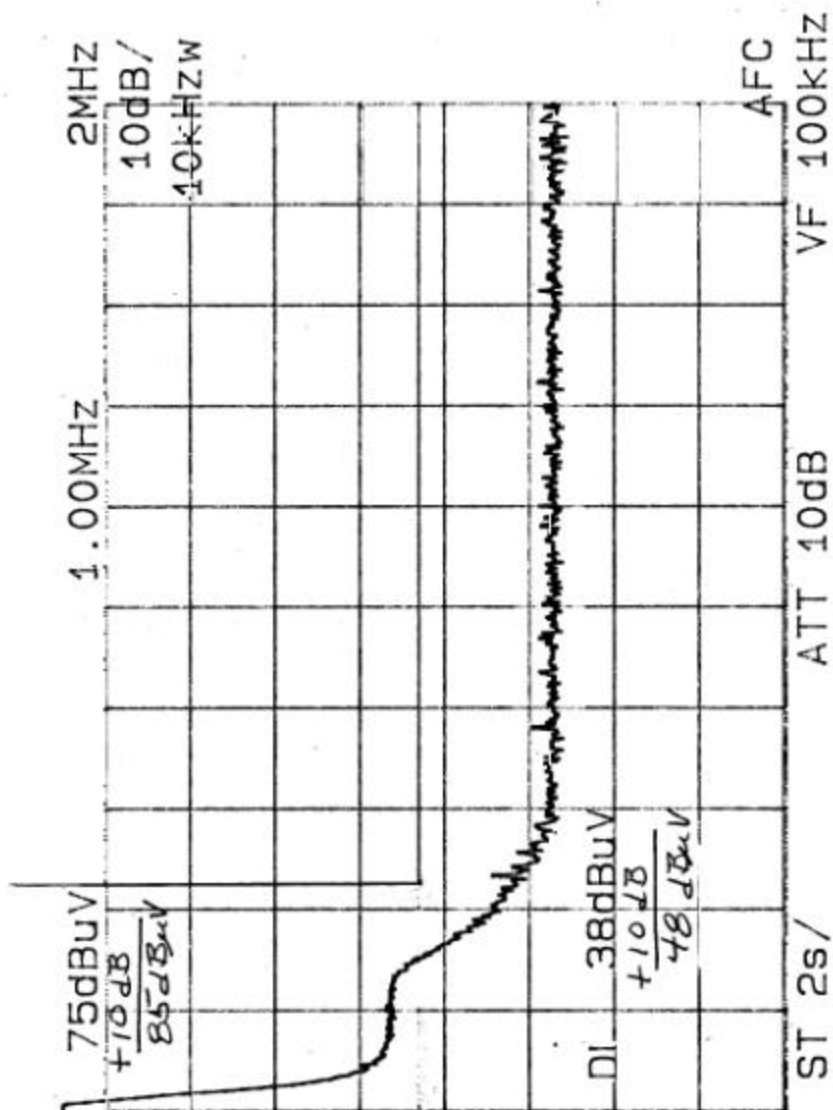


Customer: N. A. T. S. (Knogo)
 Test Sample: Desktop Antitheft Tag Detection System
 Model No.: uhl wrap desk
 Test Method: FCC 15.107 (a) Conducted Emissions 450 kHz to 30 MHz
 Notes: Lead Tested: Neutral
 Detector Function: Peak
 Date: February 17, 2000 Tech: N. Dragotta Sheet 2 of 5



Retlif Testing Laboratories

Report No. R-8384-1

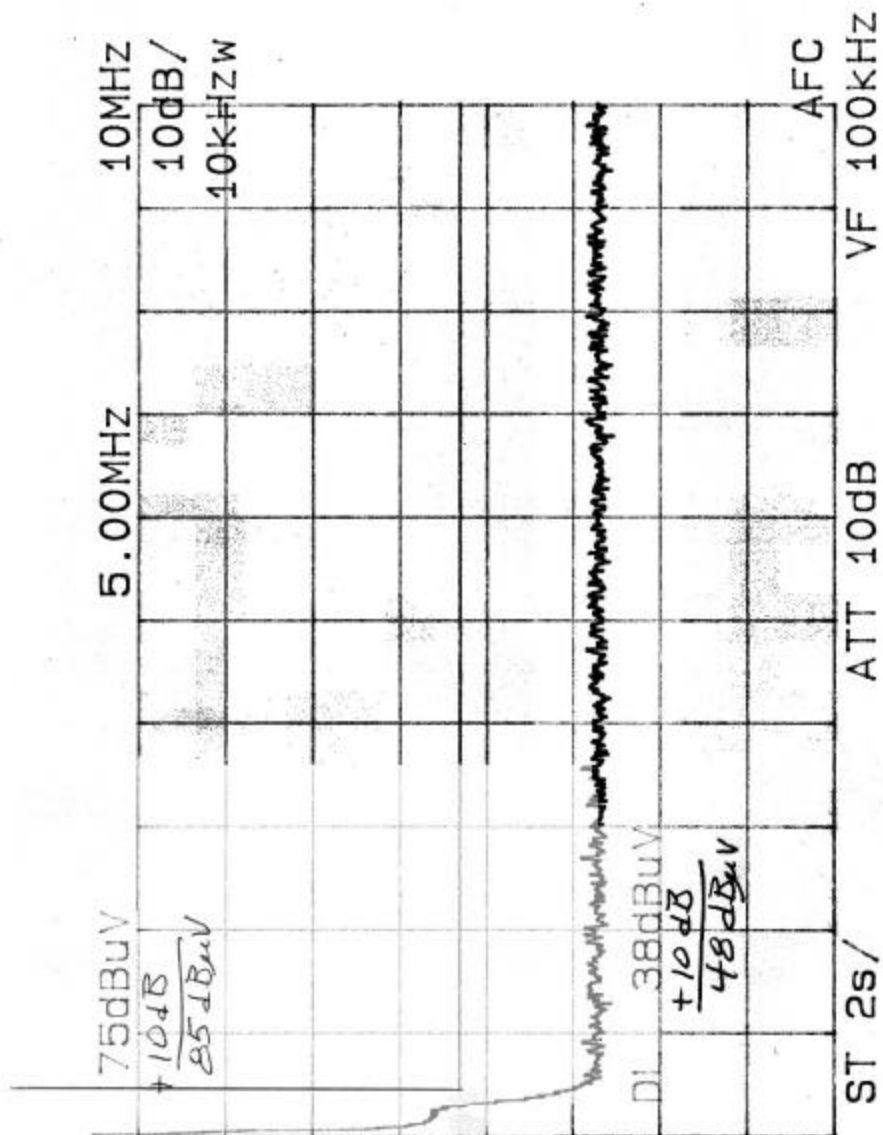


Customer: N. A. T. S. (Knogo)
 Test Sample: Desktop Antitheft Tag Detection System
 Model No.: uhl wrap desk
 Test Method: FCC 15.107 (a) Conducted Emissions 450 kHz to 30 MHz
 Notes: Lead Tested: Hot
 Detector Function: Peak
 Date: February 17, 2000 Tech: N. Dragotta Sheet 3 of 6



Retlif Testing Laboratories

Report No. R-8384-1

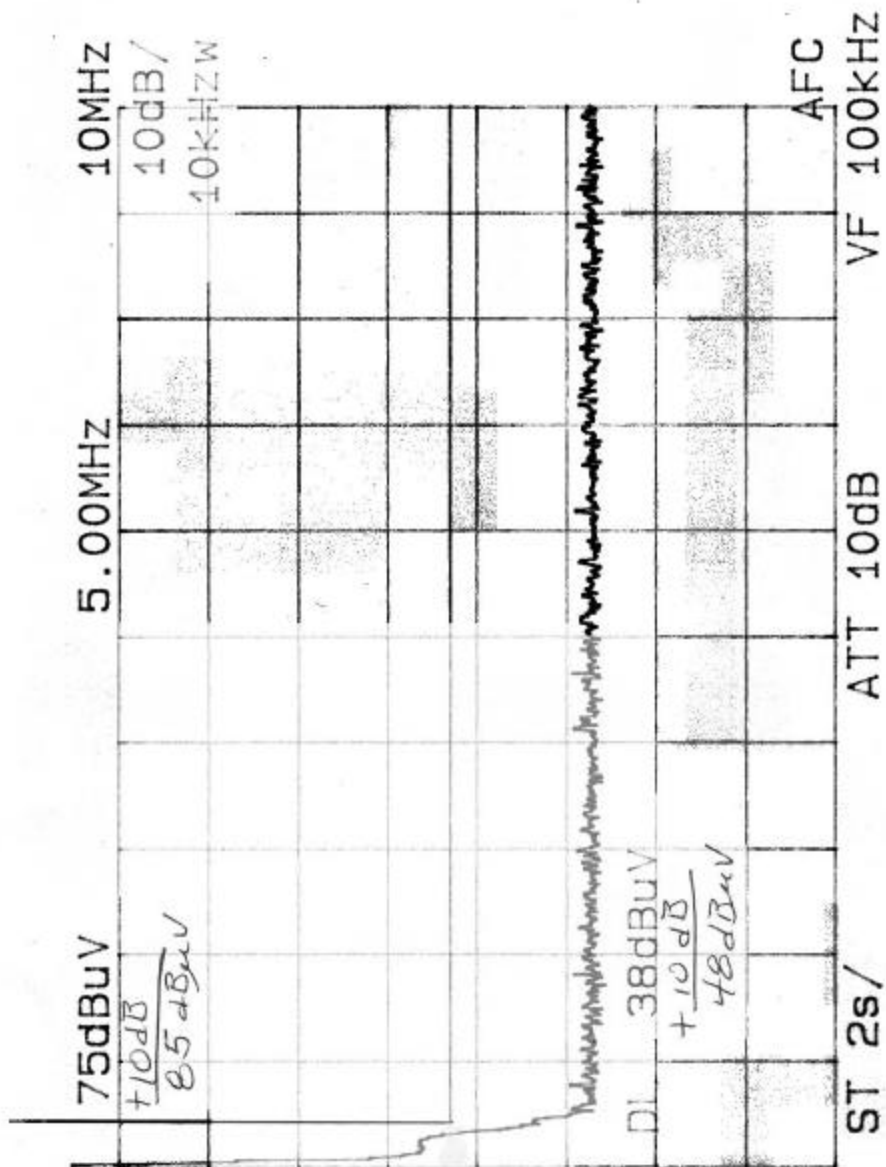


Customer: N. A. T. S. (Knogo)
 Test Sample: Desktop Antitheft Tag Detection System
 Model No.: uhf wrap desk
 Test Method: FCC 15.307 (a) Conducted Emissions 450 kHz to 30 MHz
 Notes: Lead Tested: Neutral
 Detector Function: Peak

Date: February 17, 2000 Tech: N. Dragotta *ND* Sheet 4 of 6



Retlif Testing Laboratories

Report No. R-8384-1

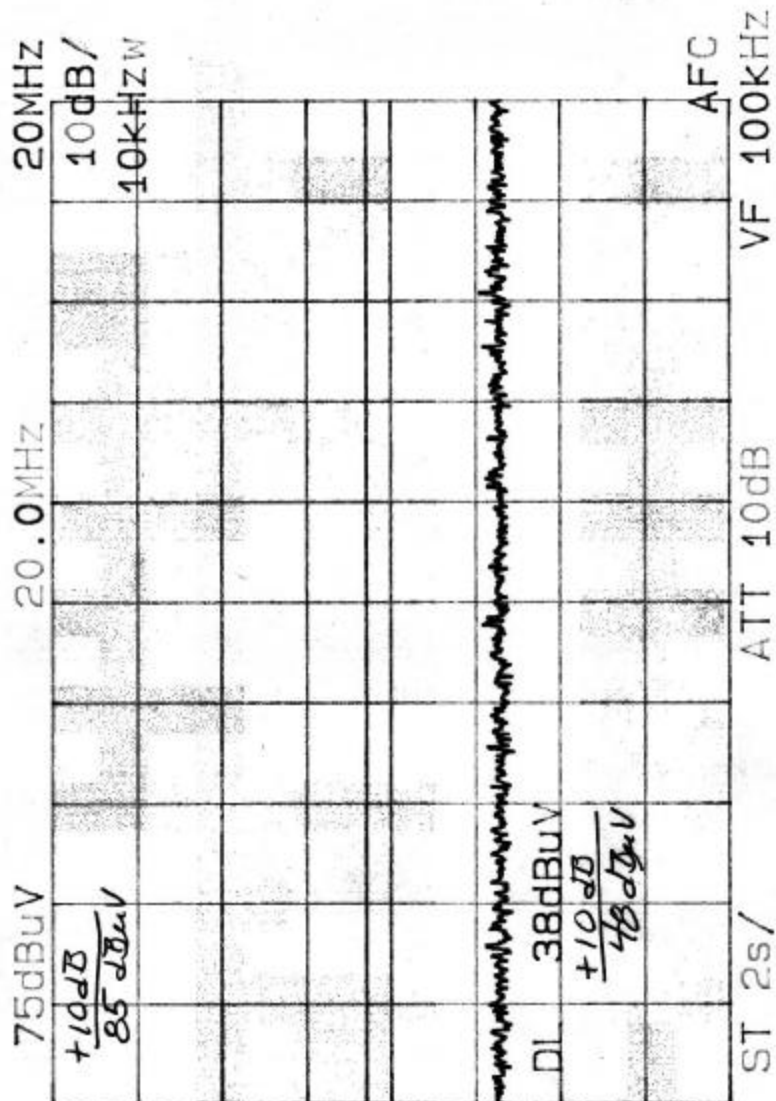


Customer: N. A. T. S. (Krogo)
 Test Sample: Desktop Antitheft Tag Detection System
 Model No.: uhf wrap desk
 Test Method: FCC 15.107 (a) Conducted Emissions: 450 kHz to 30 MHz
 Notes: Lead Tested: Hot
 Detector Function: Peak
 Date: February 17, 2000 Tech: N. Dragotta Sheet: 5 of 6



Retlif Testing Laboratories

Report No. R-8384-1

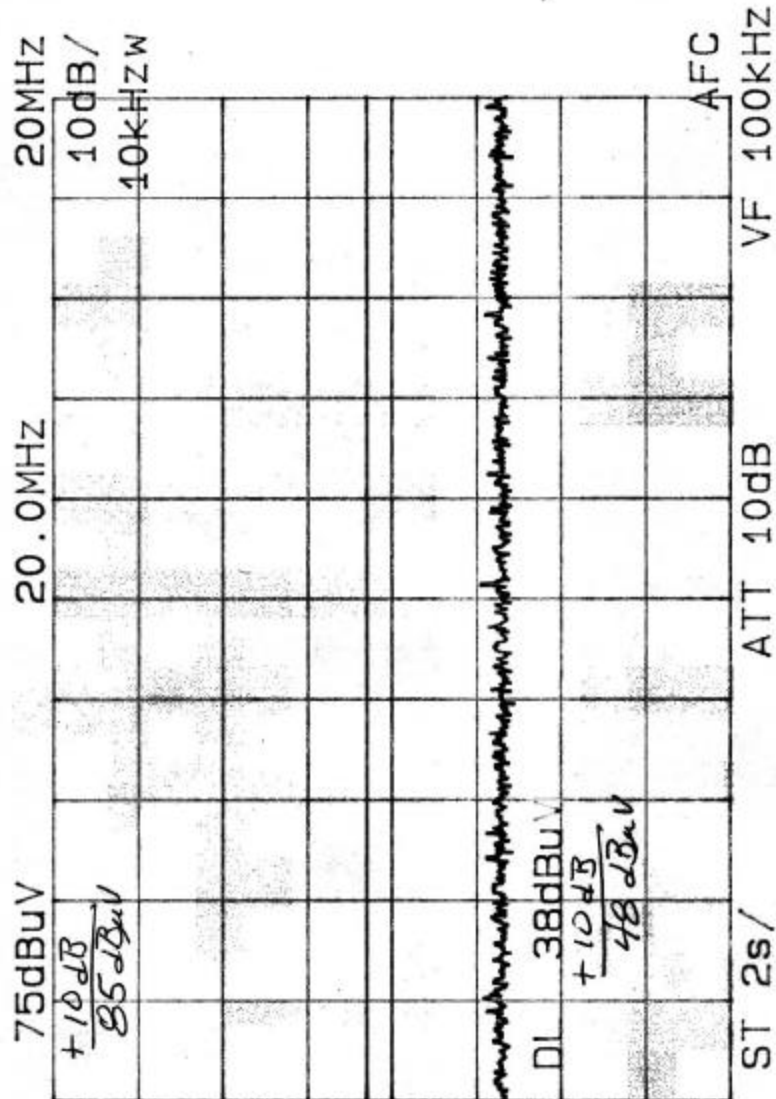

10dB/

10kHz W

20.0MHZ

75dBuV

+10dB

DL 38dBuV

EP01+

48	23a V
----	-------

AFC

VF 100KHZ

ATT 10dB

ST 2s/

Customer:	M. A. T. S. (Knogge)				
Test Sample:	Desktop Antitheft Tag Detection System				
Model No.:	uhf wrap desk				
Test Method:	FCC 15.307 (a) Conducted Emissions 450 kHz to 30 MHz				
Notes:	Load Tested: Neutral Detector Function: Peak				
Date:	February 17, 2000	Tech:	N. Dragotta	Sheet	6 of 6



Retlif Testing Laboratories