


R-8572 NATS KNOGO T-2280 Occupied Bandwidth MKR Δ 1.444 MHz
 REF 64.2 dB μ V ATTEN 10 dB

hp
 10 dB/

DL
 58.2
 dB μ V
 MARKER Δ
 1.444 MHz
 -4.30 dB

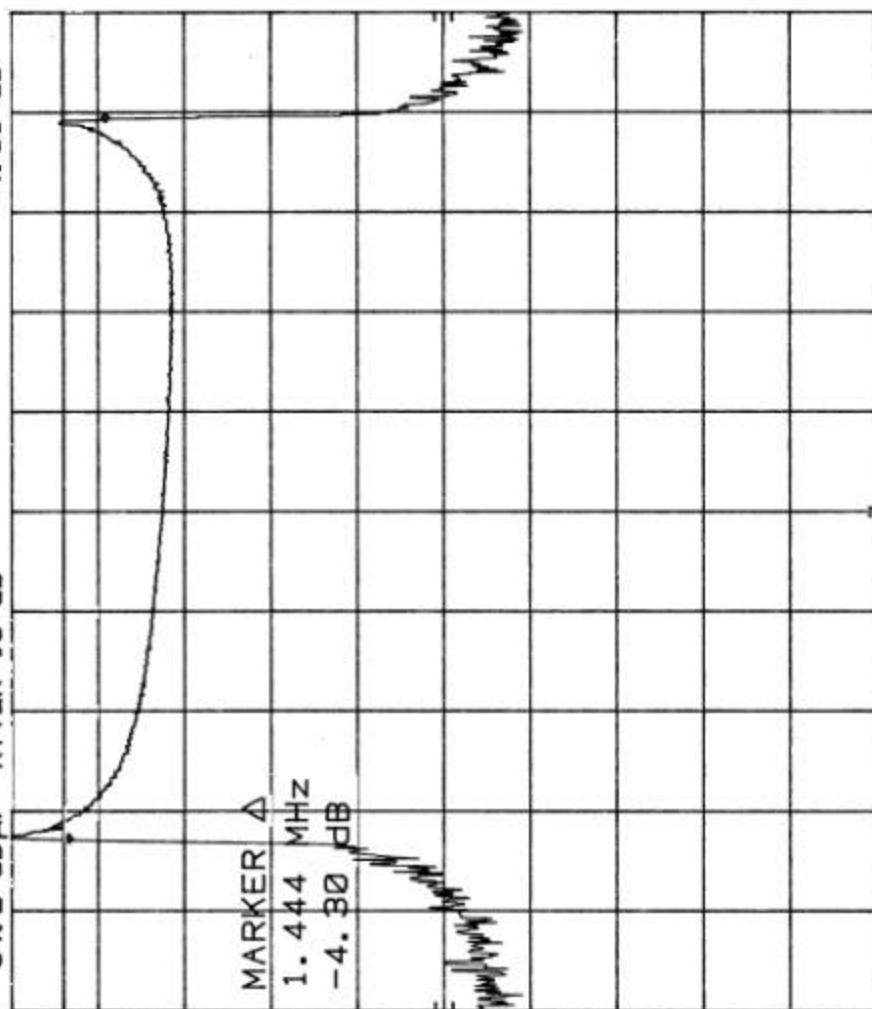

CENTER 8.20 MHz
 RES BW 1 kHz
 VBW 3 kHz
 SPAN 2.00 MHz
 SWP 6.00 sec

Customer: NATS (KNOGO NA)
 Test Sample: ANTI-THEFT DEVICE
 Model No.: T-2280
 Test Method: RSS-210 6.2.2(c) Occupied Bandwidth
 Notes: Fundamentals are inside the band 1.705-10MHz; bandwidth is greater than 10% as measured 6dB down the modulated carrier.
 Date: June 26, 2000 Tech: Peter Lananna Sheet 1 of 2



Retlif Testing Laboratories

Report No. 8572-2

R-8572 NATS KNOGO T-2280 Occupied Bandwidth MKR Δ 298.7 kHz
 REF 62.0 dB μ V ATTEN 10 dB

10 dB/

10 dB/

OFFSET

10.0

dB

DL


56.0

dB μ V

MARKER Δ

298.7 kHz

-3.40 dB

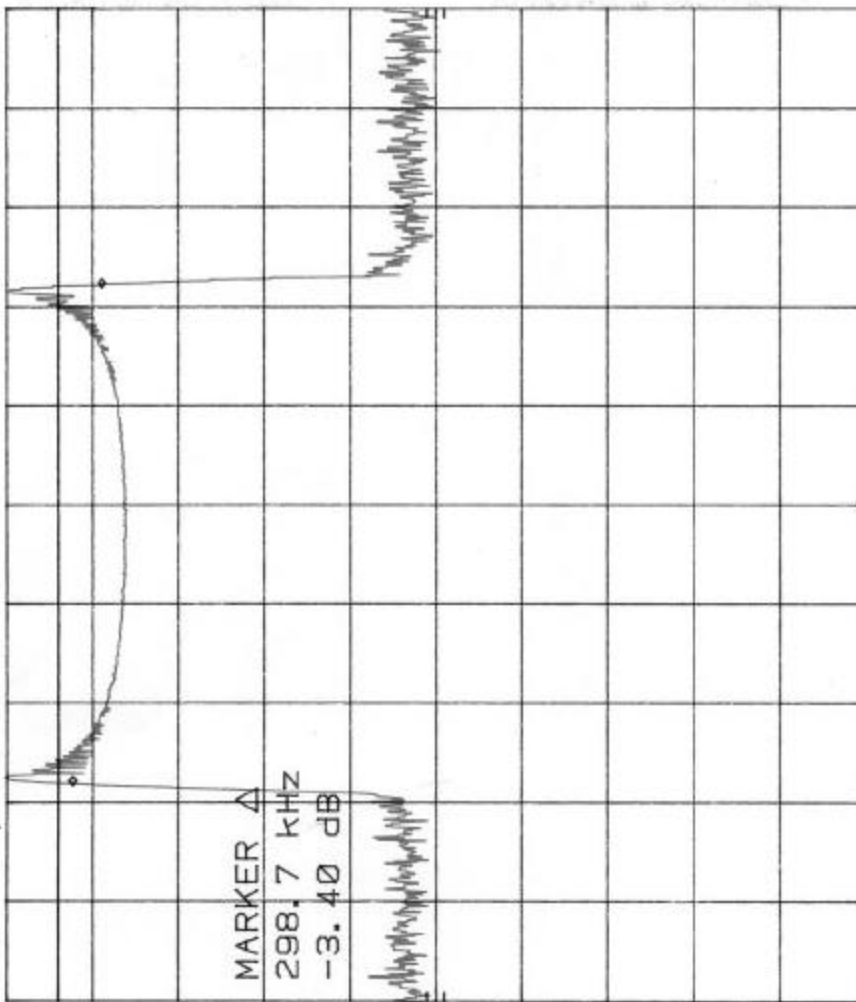

STOP 2.300 MHz
 SWP 1.79 sec

VBW 3 kHz

START 1.705 MHz
 RES BW 1 kHz

Customer: NATS (KNOGO NA)
 Test Sample: ANTI-THEFT DEVICE
 Model No.: T-2280
 Test Method: RSS-210 6.2.2(c) Occupied Bandwidth
 Notes: Fundamentals are inside the band 1.705-10MHz, bandwidth is greater than 10% as measured 6dB down the modulated carrier.
 Date: June 26, 2000 Tech: Peter Lananna Sheet 2 of 2



Retlif Testing Laboratories

Report No. 8572-2