

Buypoc
model 0043


Test No. 5

Occupied Bandwidth
Xmit Freq @ 308.5 MHz X 0.25%
711 kHz Allowed MKR


REF 107.0 dB V ATTN 10 dB +0 dB 369 KHz .00 dB

10 dB/

DL
72.6
dB V

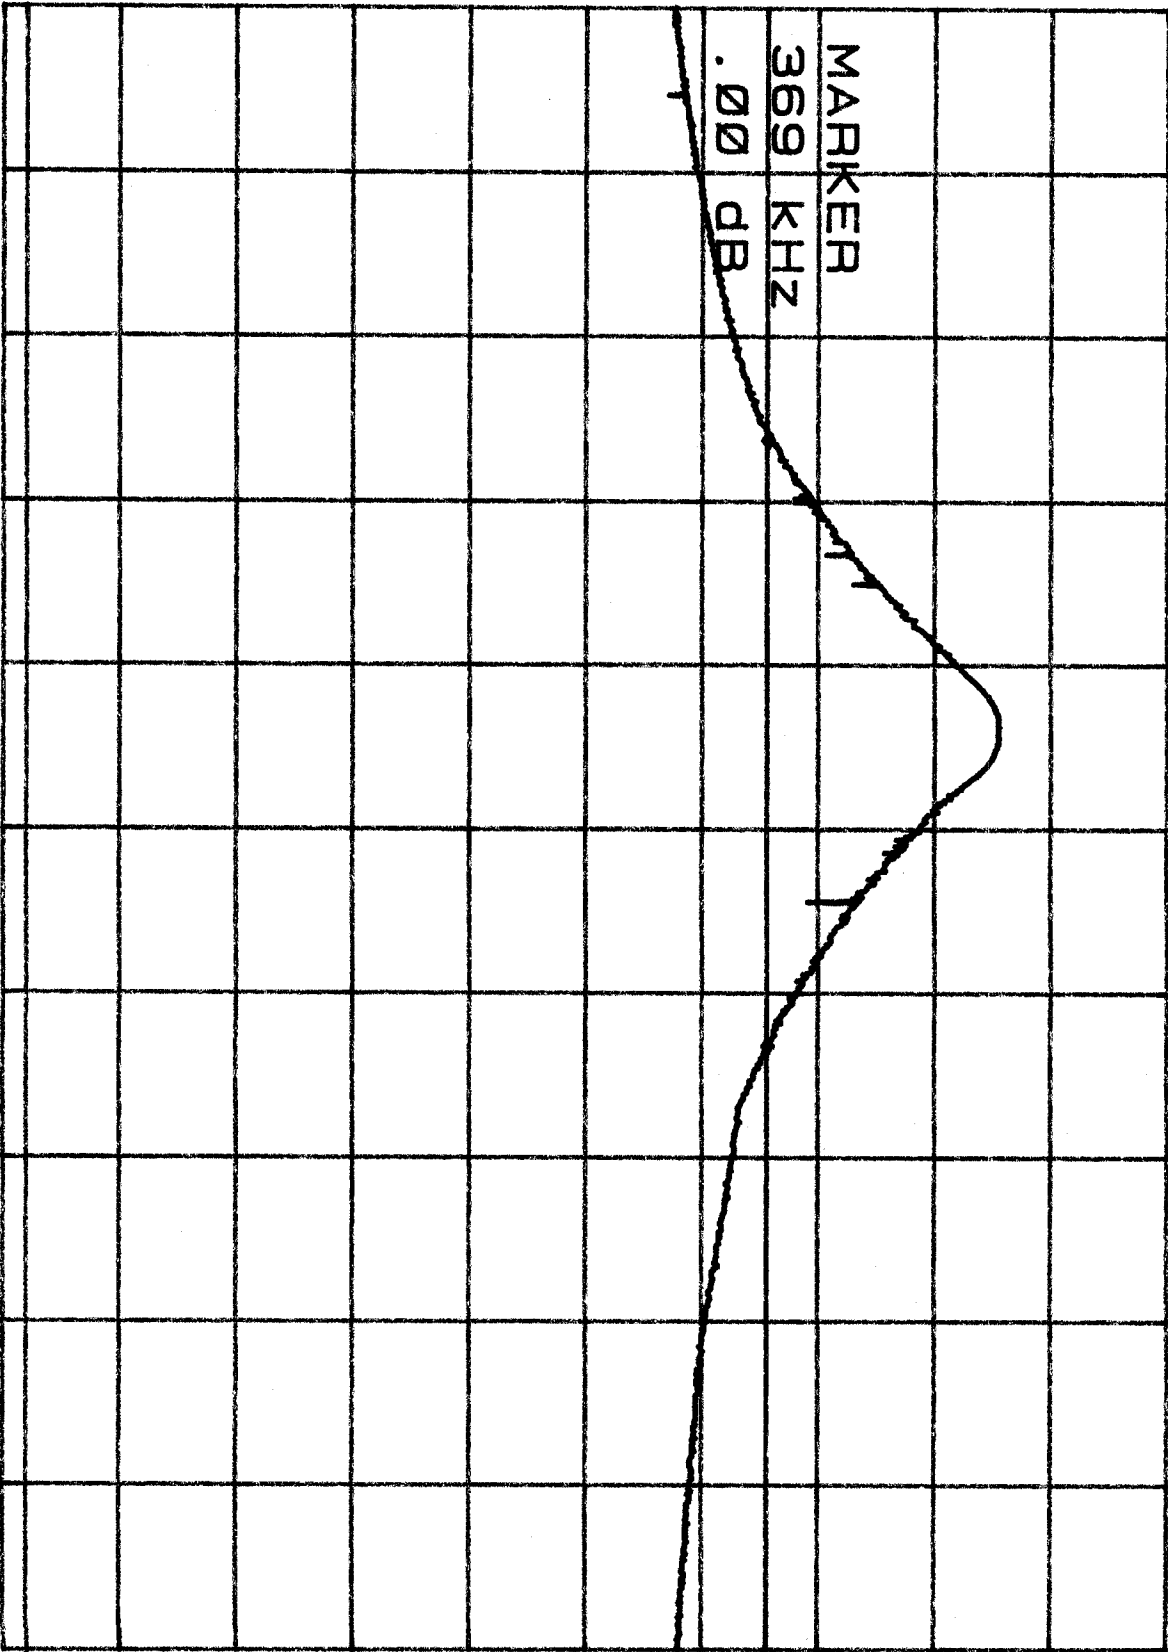

CENTER 308.954 MHz SPAN 1.000 MHz
RES BW 100 KHz (1) VBW 1 MHz SWP 20 msec

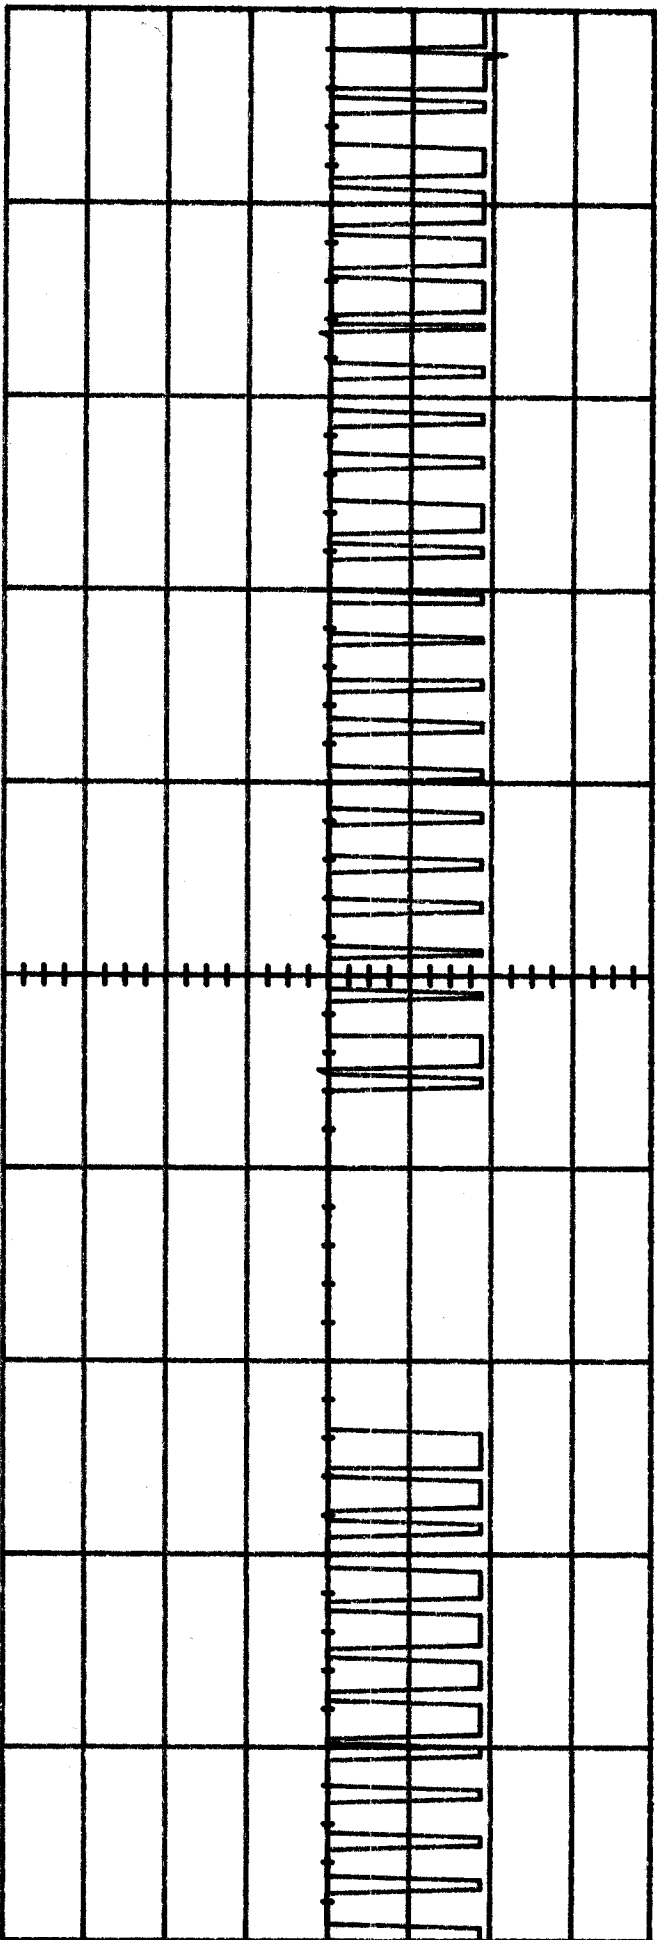


Main Timebase 10.0 ms/div Delay/Pos 0.00000 s
 Channel 1 Sensitivity 5.00 V/div Offset 0.00000 V
 Trigger mode : Edge
 On Positive Edge of Chan1
 Trigger Level
 Chan1 = 7.50000 V (noise reject OFF)
 Holdoff = 100.000 ns

Reference Left
 Mode Repetitive
 Coupling dc (1M ohm)

Markers
 Vmarker2 (c1) = 19.9991 V
 Vmarker1 (c1) = 0.00000 V
 delta V (c1) = 19.9991 V
 stop = 40.0000 ms
 start = -80.0000 ms
 delta t = 100.000 ms
 1/delta t = 10.0000 Hz

Pulse train over
 100 msecs.


Buc Doc model 0043

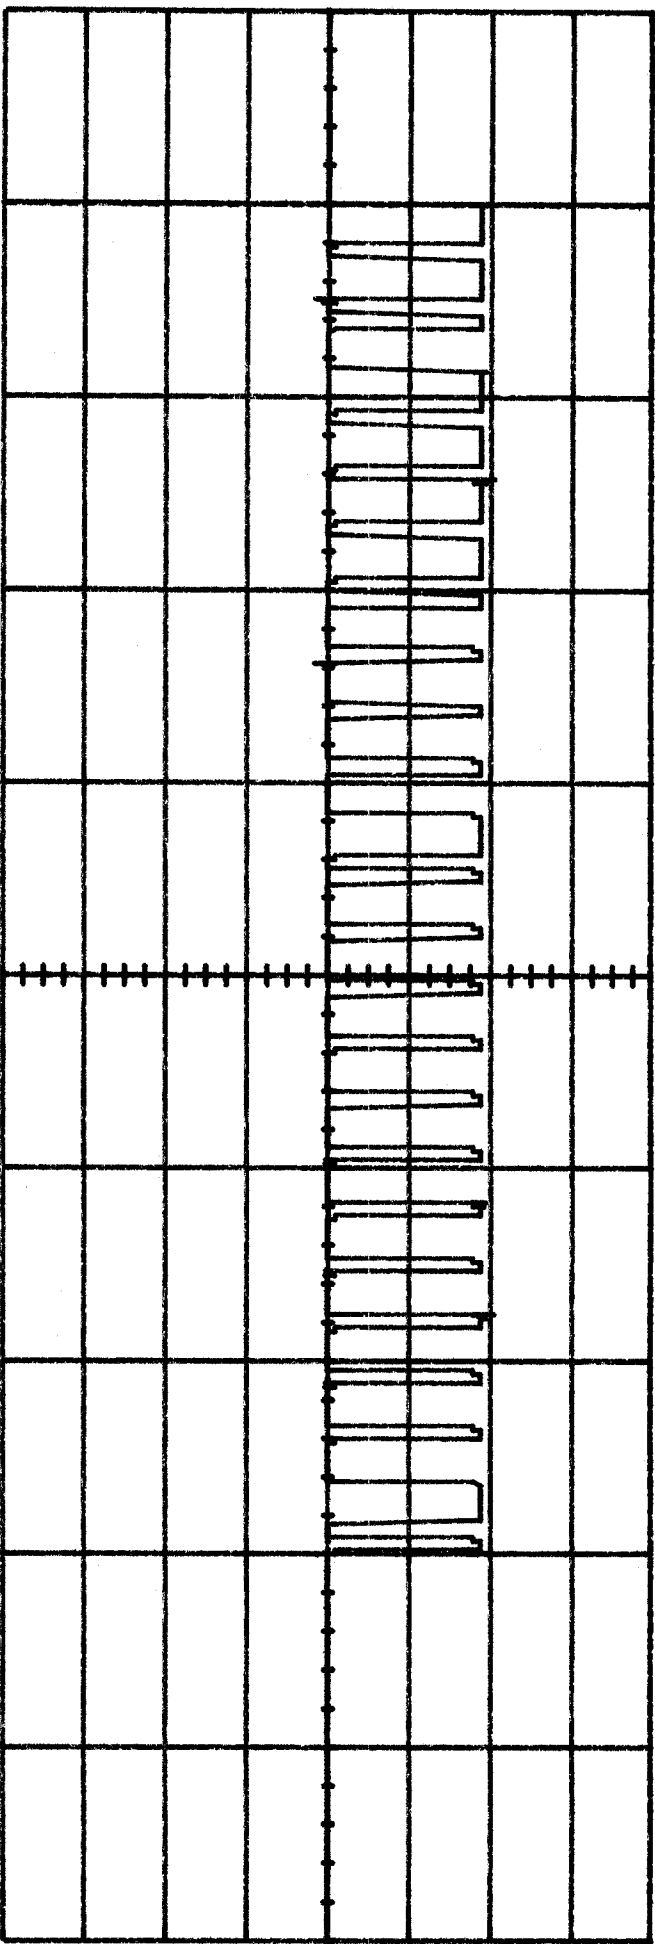

Timebase 8.00 ms/div Delay/Pos -8.00000 ms Reference Left Mode Realtime (EXTENDED)
 Main Sensitivity 5.00 V/div Offset 0.00000 V Probe 10.00 : 1 Coupling dc (1M ohm)
 Channel 1
 Trigger mode : Edge
 On Positive Edge of Chan1
 Trigger Level
 Chan1 = 7.50000 V (noise reject OFF)
 Holdoff = 40.000 ns


Markers
 Vmarker2 (c1) - 19.9821 V
 Vmarker1 (c1) - 0.00000 V
 delta V (c1) - 19.9821 V
 stop - 55.0000 ms
 start - 0.00000 s
 delta t - 55.0000 ms
 1/delta t - 17.9871 Hz

Sine Pulse
 Train

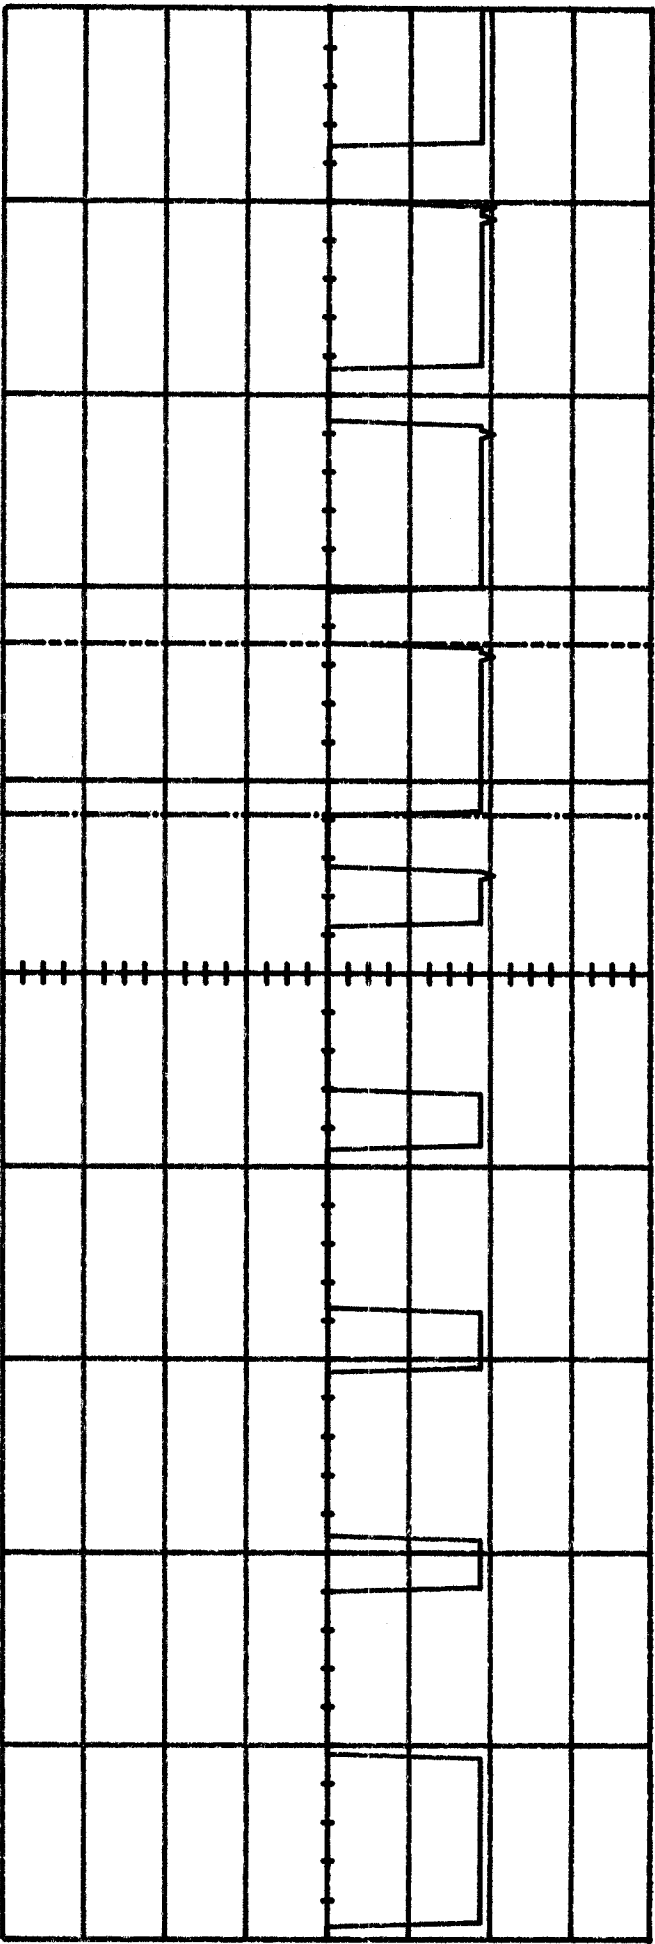

Main	Timebase	Delay/Pos	Reference	Mode	Markers
	2.00 ms/div	-2.00000 ms	Left	Repetitive	Vmarker2 (c1) = 10.9521 V
Channel 1	Sensitivity	Offset	Probe	Coupling	Vmarker1 (c1) = 0.00000 V
	5.00 V/div	0.00000 V	10.00 : 1	dc (1M ohm)	delta V (c1) = 10.9521 V
Trigger mode : Edge					
On Positive Edge Of Chan1					
Trigger Level					
Chan1 = 7.50000 V (noise reject OFF)					
Holdoff = 100.000 ns					
	stop	start	delta t	1/delta t	
	= 6.36000 ms	= 4.56000 ms	= 1.50000 ms	= 666.666 Hz	

Long Rise Time
1.8 ms

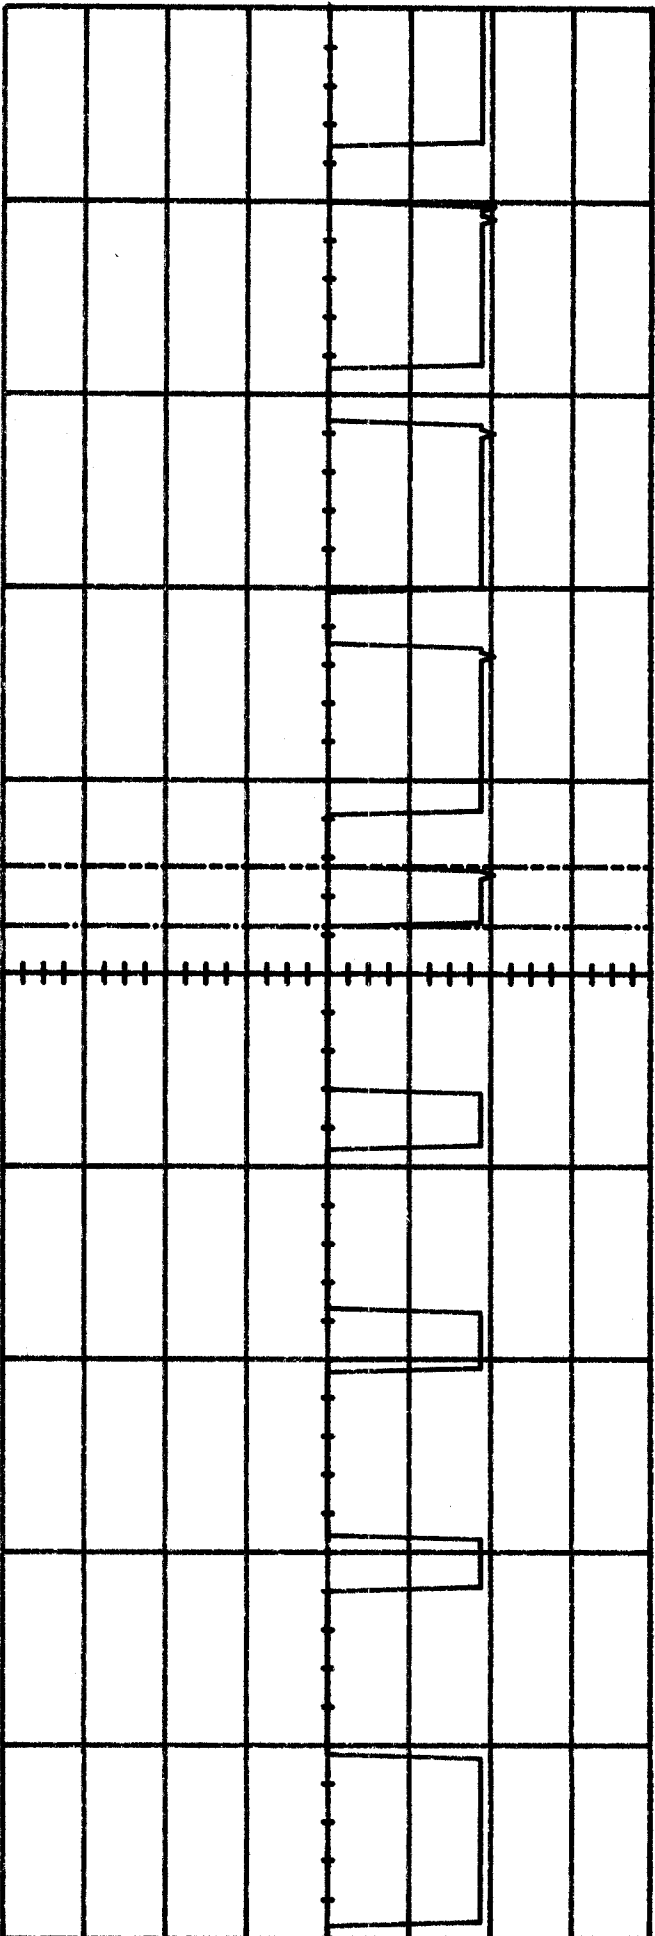

Timebase 2.00 ms/div Delay/Pos -2.00000 ms Reference Left Mode Repetitive
 Main Sensitivity 5.00 V/div Offset 0.00000 V Probe 10.00 : 1 Coupling dc (1M ohm)
 Channel 1
 Trigger mode : Edge
 On Positive Edge Of Chan1
 Trigger Level
 Chan1 = 7.50000 V (noise reject OFF)
 Holdoff = 100.000 ns

Markers
 Vmarker2 (c1) = 19.9921 V
 Vmarker1 (c1) = 0.00000 V
 delta V (c1) = 19.9921 V
 stop = 7.52000 ms
 start = 6.88000 ms
 delta t = 640.000 us
 1/delta t = 1.56250 kHz

Short Pulse
 0.64 ms