

**S&A Systems, Inc.**

Application  
For  
Certification  
**(FCC ID: J4CTRM303)**

Fleetwatch TRM 303

## **INTERTEK TESTING SERVICES**

---

---

### **LIST OF EXHIBITS**

#### *INTRODUCTION*

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Emission Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labelling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	Instruction Manual
<i>EXHIBIT 8:</i>	Miscellaneous Information

# INTERTEK TESTING SERVICES

---

## MEASUREMENT/TECHNICAL REPORT

**S&A System, Inc. - MODEL: Fleetwatch TRM 303**  
**FCC ID: J4CTRM303**

**November 26, 2001**

This report concerns (check one): Original Grant  Class II Change

Equipment Type: Low Power Transceiver (example: computer, printer, modem, etc.)

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes  No

If yes, defer until: \_\_\_\_\_  
date

Company Name agrees to notify the Commission by: \_\_\_\_\_  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes  No

If no, assumed Part 15, Subpart C for intentional radiator - the new 47 CFR [10-1-96 Edition] provision.

Report prepared by: Sudesh Kamble  
Intertek Testing Services  
420 N Dorothy Drive  
Richardson, TX  
USA  
Phone: 972-238-5591  
Fax: 972-238-1860

# INTERTEK TESTING SERVICES

---

## Table of Contents

<b>1.0 General Description</b> .....	2
1.1 Product Description .....	2
1.2 Related Submittal(s) Grants .....	2
1.3 Test Methodology .....	3
1.4 Test Facility .....	3
<b>2.0 System Test Configuration</b> .....	5
2.1 Justification .....	5
2.2 EUT Exercising Software .....	5
2.3 Special Accessories .....	5
2.4 Equipment Modification .....	6
2.5 Support Equipment List and Description .....	6
<b>3.0 Emission Results</b> .....	8
3.1 Field Strength Calculation .....	9
3.2 Emission Configuration Photograph .....	10
3.3 Emission Data .....	11
<b>4.0 Equipment Photographs</b> .....	19
<b>5.0 Product Labelling</b> .....	21
<b>6.0 Technical Specifications</b> .....	23
<b>7.0 Instruction Manual</b> .....	25
<b>8.0 Miscellaneous Information</b> .....	27
8.1 Measured Bandwidth .....	29
8.2 Discussion of Pulse Desensitization .....	30
8.3 Calculation of Average Factor .....	31
8.4 Emissions Test Procedures .....	32

## INTERTEK TESTING SERVICES

---

---

### List of attached file

Exhibit type	File Description	Filename
Test Report	Test Report	report.doc
Operation Description	Technical Description	operation desc.pdf
Test Setup Photo	Radiated Emission	Rconfig photos.doc
Test Report	Bandwidth Plot	bw.gif
External Photo	External Photo	Intrnal_external.doc
Internal Photo	Internal Photo	Intrnal_external.doc
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Timing Diagram	Timing Diagram	timing.gif

# A

## **EXHIBIT 1**

### **GENERAL DESCRIPTION**

# A

## 1.0 General Description

### 1.1 Product Description

The TRM303 printed circuit board is a transceiver module designed to allow command and control devices, such as PC, access to the M292/M392/M492 series of electronic trip recorders and other compatible Fleetwatch RF Data Acquisition equipment. It provides either battery operated or wall power operated modes and is equipped with a standard RS-232E serial connection to facilitate communications. The device is envisioned as being used directly connected to a standard PC or as an add-on extension for hand held computing device such as the Palm III. It may also be connected to dedicated monitoring equipment for remote monitoring and recording.

For electronic filing, the brief circuit description is saved with filename: descri.pdf

### 1.2 Related Submittal(s) Grants

This is a single application for certification of a transmitter.

# A

## 1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.4 (1992). All measurements were performed in 3meters FCC approved Anechoic Chamber. The site attenuation of the chamber is performed as per the procedure detailed in ANSI C63.4-1992-Alternate Test Site and is within the specified tolerance. For each scan, the procedure for maximizing emissions in Appendices D and E were followed. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

## 1.4 Test Facility

The Anechoic Chamber and conducted measurement facility used to collect the emission data is located at 420 N Dorothy Drive, Richardson, TX - 75081. This test facility and site measurement data have been fully placed on file with the FCC.

# A

## **EXHIBIT 2**

### **SYSTEM TEST CONFIGURATION**

# A

## 2.0 System Test Configuration

### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (1992).

The EUT was powered from 9V fully charged battery and the adapter.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The unit was operated standalone and placed in the center of the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

For simplicity of testing, the unit was wired to transmit continuously.

### 2.2 EUT Exercising Software

The EUT triggers from the test software installed on a computer. Once EUT gets the signal from computer via interface cable, the unit transmits the typical signal. For simplicity of testing, the unit was wired to transmit continuously.

The test software used is the “Mobile Receiver Interface Software v2.0.0 Beta 1”

### 2.3 Special Accessories

There are no special accessories necessary for compliance of this product.  
1m long RJ45 to DB9 serial cable used for connection with the computer.

# A

## 2.4 Equipment Modification

Any modifications installed previous to testing by S&A Systems, Inc. will be incorporated in each production model sold/leased in the United States.

No modifications were installed by Intertek Testing Services.

## 2.5 Support Equipment List and Description

This product was tested in a standalone configuration.

All the items listed under section 2.0 of this report are

*Confirmed by:*

*Sudesh Kamble  
EMC Team Leader  
Intertek Testing Services, Richardson Tx.  
Agent for S&A Systems, Inc.*

Signature



November 26, 2001

# A

## **EXHIBIT 3**

### **EMISSION RESULTS**

# A

## 3.0 Emission Results

Data is included worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

# A

## 3.1 Field Strength Calculation

The field strength indicated in the test results are inclusive of the antenna factors and the cable losses used during the measurement.

EMI receiver incorporating Quasi- peak and average filters was used for radiated emission measurements. The cable losses and the antenna factors were added in the EMI receiver and the corrected values are indicated in the table and graphs.

# A

## 3.2 Emission Configuration Photograph

Worst Case Radiated Emission  
at  
303.80 MHz

For electronic filing, the worst-case radiated emission configuration photograph is saved with filename: Rconfig photos.doc

# A

## 3.3 Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 12.55 dB

### **TEST PERSONNEL:**

---

*Signature*

Sudesh Kamble, EMC Team Leader  
*Typed/Printed Name*

---

November 26, 2001

---

*Date*

# A

## Radiated Emissions

Date : October 11, 2001

Company : S&A Systems, Inc.  
O Box 1928,  
Rockwall, TX 75087-2028

Equipment: Fleetwatch, Model TRM 303

Test Engineer: Sudesh Kamble

Test Standard: CFR 47:1999, §15.209 and §15.231(b)

Note : The table shows the worst case radiated emissions. All the measurements were performed at test distance of 3m.

Table # 1: Radiated Emission

Antenna Polarity	Antenna Hts(m)/Azi muth	Frequency MHz	QP Reading dBuV/m	Limit dBuV/m	Margin	Comment
H	2.15/ 45 deg	303.80	60.69	82.57	-21.88	Pass
V	1.71/43 deg	303.80	70.02	82.57	-12.55	Pass
H	2.15/ 45 deg	303.80	60.38**	82.57	-22.19	Pass
V	1.71/43 deg	303.80	69.18**	82.57	-13.39	Pass

\*\* When measured with battery option.

No spurious emissions were detected at frequencies other than fundamental frequency above the noise floor. Please refer to Graph 1 and 2.

Table # 2: Radiated Emission in Restricted Bands

Antenna Polarity	Antenna Hts(m)/Azi muth	Frequency MHz	QP/Ave. Reading dBuV/m	Limit dBuV/m	Margin	Comment
H/V	2.0/0	322.00	28.33*	46	--	Pass
H/V	2.0/0	610.00	35.90*	46	--	Pass
H/V	2.0/0	990.00	44.00*	46	--	Pass
H/V	2.0/0	1510.00	44.00*	54	--	Pass
H/V	2.0/0	2500.00	50.00*	54	--	Pass

\* Indicates the Noise floor with Antenna factors incorporated during measurements.

# A

Notes:

1. QP measurements were performed for frequencies below 1GHz and Average measurements were performed for frequencies above 1 GHz.
2. Peak Detector Data unless otherwise stated.
3. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna and average detector are used for the emission over 1000MHz.
6. Emission within the restricted band meets the requirement of Section 6.3. The corresponding limit as Section 6.2.1 is based on Quasi peak detector data for frequencies below 1000 MHz and average detector data for frequencies over 1000 MHz.

Test Engineer: Sudesh Kamble

# A

## Conducted Emissions

Date : October 11, 2001  
Company : S&A Systems, Inc.  
O Box 1928,  
Rockwall, TX 75087-2028  
Equipment: Fleetwatch, Model TRM 302  
Test Engineer: Sudesh Kamble  
Test Standard: CFR 47:1999, §15.207

Table # 3: Line 1

Frequency MHz	QP Reading dBuV/m	Limit dBuV/m	Margin	Comment
3.75	8.41	48	-39.59	Pass
5.58	13.98	48	-34.02	Pass
6.71	13.52	48	-34.48	Pass


Table # 4: Line 2

Frequency MHz	QP Reading dBuV/m	Limit dBuV/m	Margin	Comment
3.75	8.23	48	-39.77	Pass
5.58	13.80	48	-34.20	Pass
6.71	17.95	48	-30.05	Pass

No emissions were detected at frequencies other than mentioned in the above tables above the noise floor. Please refer to Graph 4 and 5.


# INTERTEK TESTING SERVICES

## Graph #1 : Radiated Emission Prescan

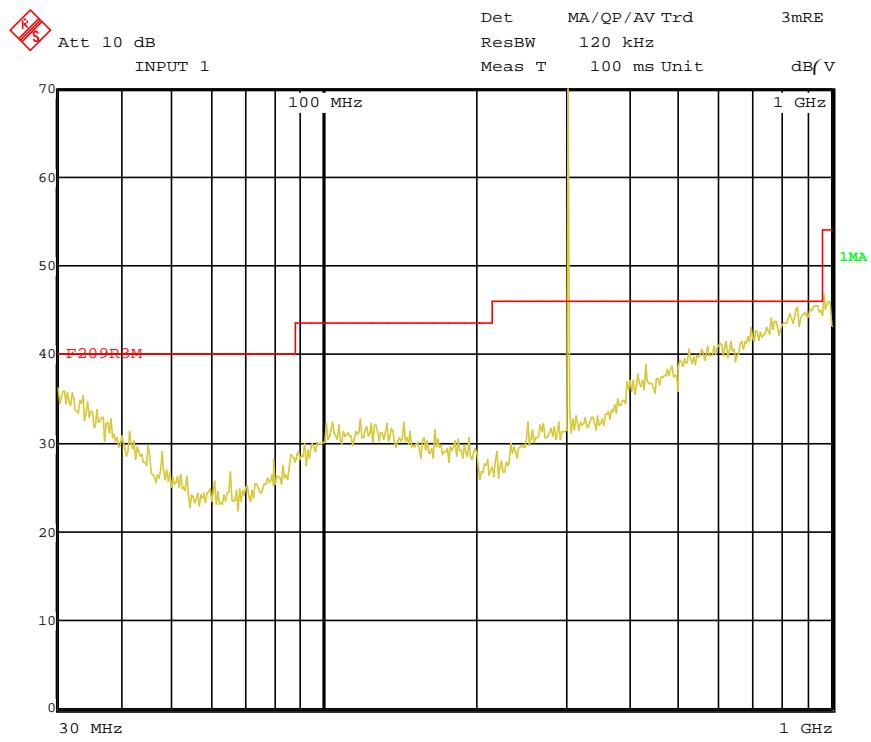

Date: 10.OCT.2001 15:25:30

## Graph #2: Radiated Emission Prescan

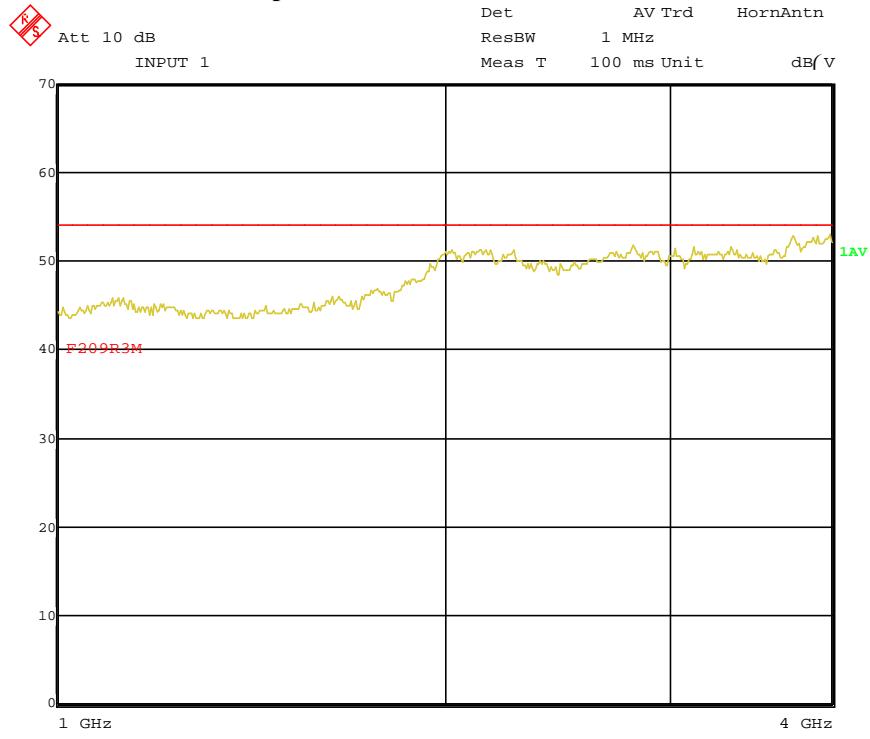


Date: 10.OCT.2001 15:28:54

# INTERTEK TESTING SERVICES

---


Graph #3 : 20 dB Bandwidth Measurement

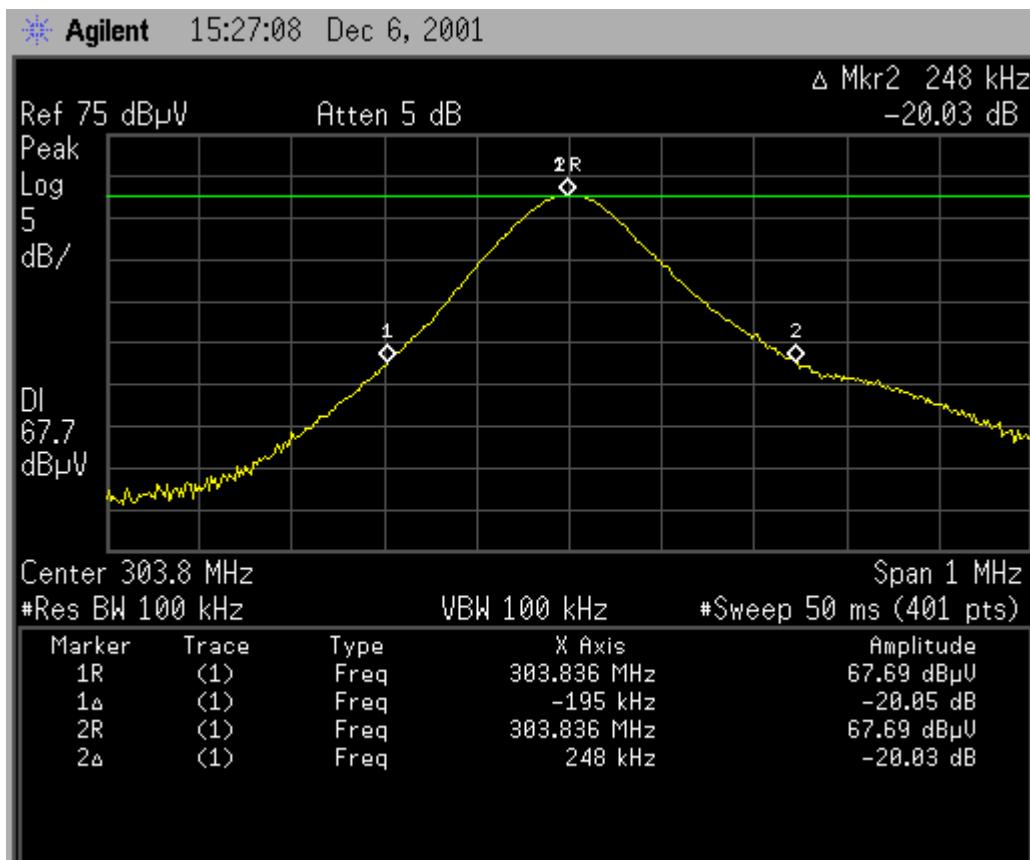


# INTERTEK TESTING SERVICES

---

**Graph #4: Conducted Emission Line 1**

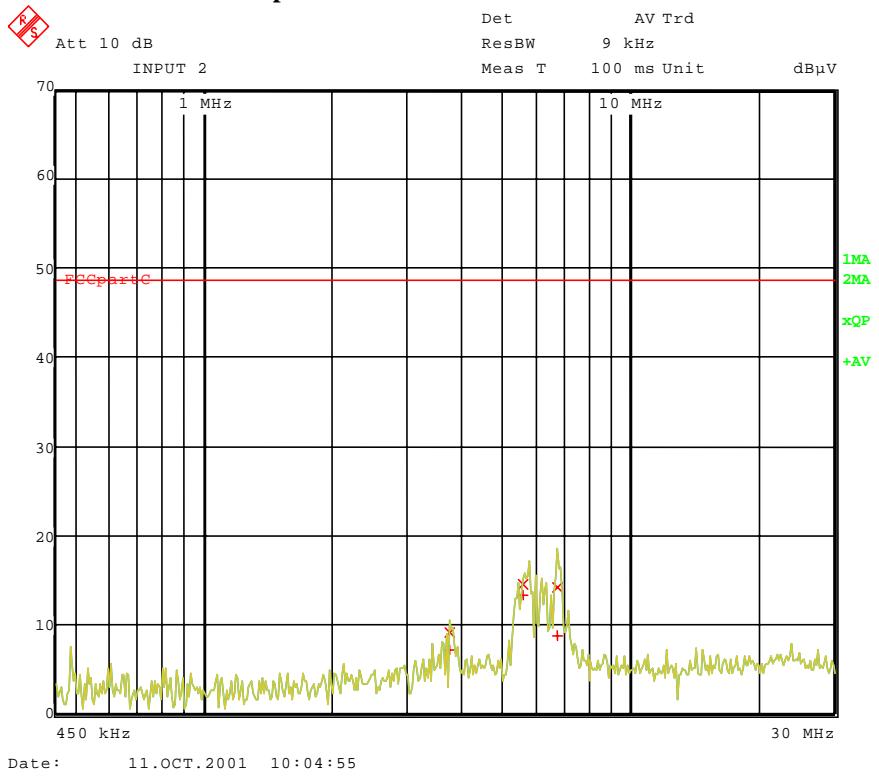

**Graph #5: Conducted Emission Line 2**

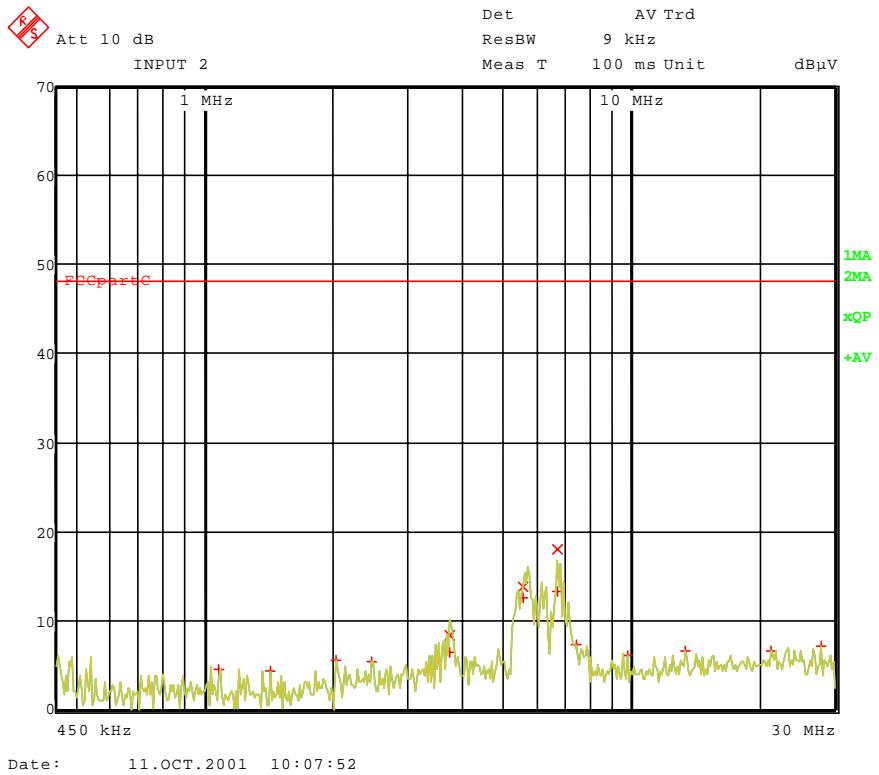

**INTERTEK TESTING SERVICES**

---

---

**EXHIBIT 4**

**EQUIPMENT PHOTOGRAPHS**

## INTERTEK TESTING SERVICES

---

---

### 4.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.doc & internal photos.doc

**INTERTEK TESTING SERVICES**

---

---

**EXHIBIT 5**

**PRODUCT LABELLING**

## INTERTEK TESTING SERVICES

---

---

### 5.0 **Product Labelling**

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf

**INTERTEK TESTING SERVICES**

---

---

**EXHIBIT 6**

**TECHNICAL SPECIFICATIONS**

## INTERTEK TESTING SERVICES

---

---

### 6.0 **Technical Specifications**

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

**INTERTEK TESTING SERVICES**

---

---

**EXHIBIT 7**

**INSTRUCTION MANUAL**

## **INTERTEK TESTING SERVICES**

---

---

### **7.0 Instruction Manual**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf

This manual will be provided to the end-user with each unit sold/leased in the United States.

**INTERTEK TESTING SERVICES**

---

---

**EXHIBIT 8**

**MISCELLANEOUS INFORMATION**

## INTERTEK TESTING SERVICES

---

---

### 8.0 **Miscellaneous Information**

This miscellaneous information includes details of the measured bandwidth, the test procedure and calculation of factors such as pulse desensitization and averaging factor.

## INTERTEK TESTING SERVICES

---

---

### 8.1 Measured Bandwidth

For electronic filing, the plot shows the fundamental emission when modulated is saved with filename: bw.gif.

#### **Bandwidth Measurement§15.231(c):**

Fundamental Freq. 303.836 MHz Signal strength = 67.69

Lower Freq. (-20dB of peak at fundamental Freq.)= 303.641 MHz

Higher Freq. (-20dB of peak at fundamental Freq.)= 304.084 MHz

20db BW= 0.443 MHz which is 0.14% of fundamental (max. allowed is 0.25% of fundamental freq.)

Therefore, the unit meets the requirement of section 15.231(c).

Figure 8.1 Bandwidth

## **INTERTEK TESTING SERVICES**

---

---

### **8.2 Discussion of Pulse Desensitization**

Pulse desensitivity was not applicable for this device.

## **INTERTEK TESTING SERVICES**

---

---

### **8.3 Calculation of Average Factor**

The EMI receiver was incorporated with Quasi-Peak and Average detector. The emission results show the Quasi-Peak values of the emission.

For electronic filing, the plot shows the transmission timing is saved with filename: timing.gif.

## INTERTEK TESTING SERVICES

---

---

### 8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.4 - 1992.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately one meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in Quasi-peak mode. The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower. For line conducted emissions, the range scanned is 450 kHz to 30 MHz.

## INTERTEK TESTING SERVICES

---

---

### 8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.4 - 1992.

The IF bandwidth used for measurement of radiated signal strength was 120kHz when frequency is below 1000 MHz. Above 1000 MHz, a resolution bandwidth of 1 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.