

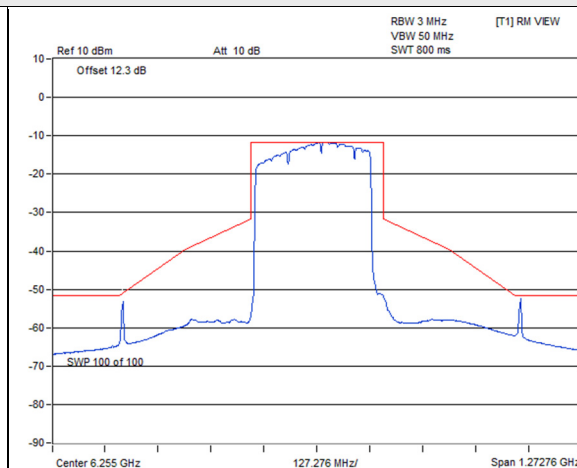
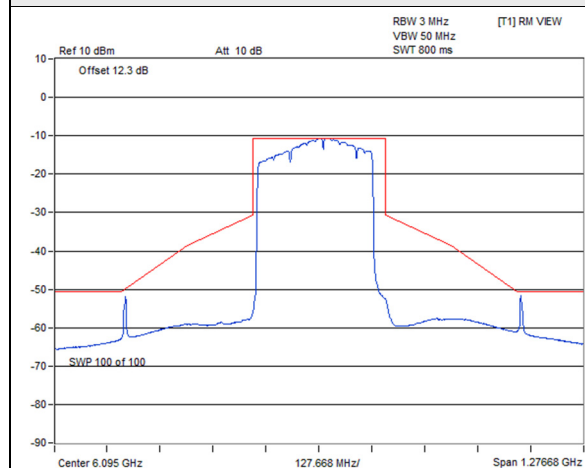


802.11be (EHT320) 3x996+484-tone MRU

Spectrum Plot

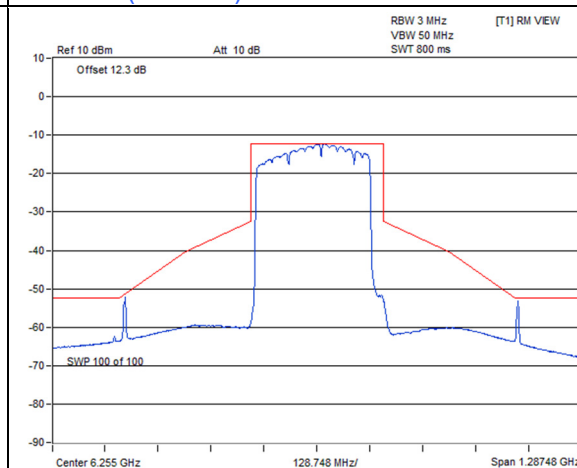



802.11be (EHT320) 3x996+484-tone MRU / Chain 0 : CH 31 802.11be (EHT320) 3x996+484-tone MRU / Chain 0 : CH 63

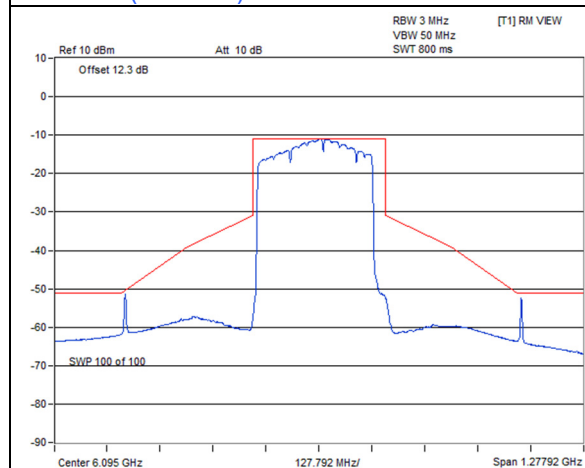

802.11be (EHT320) 3x996+484-tone MRU / Chain 1 : CH 31 802.11be (EHT320) 3x996+484-tone MRU / Chain 1 : CH 63



802.11be (EHT80) Punctured by 20 MHz

Spectrum Plot

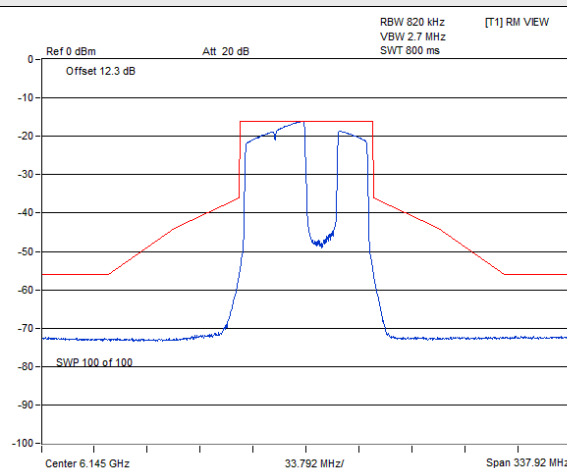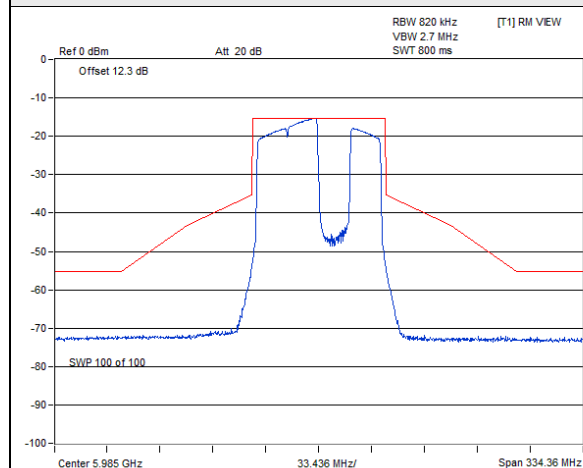



802.11be (EHT80) Punctured by 20 MHz / Chain 0 : CH 7

802.11be (EHT80) Punctured by 20 MHz / Chain 0 : CH 39

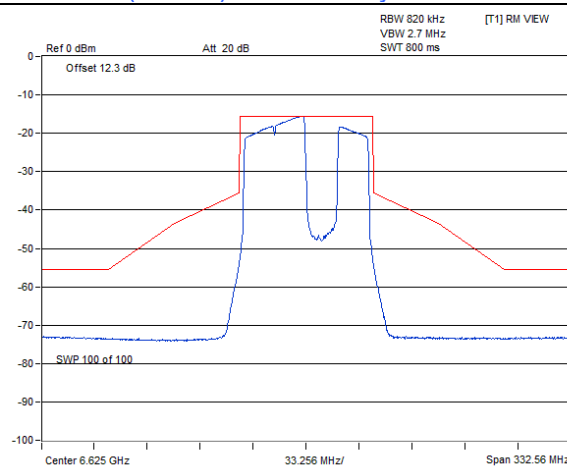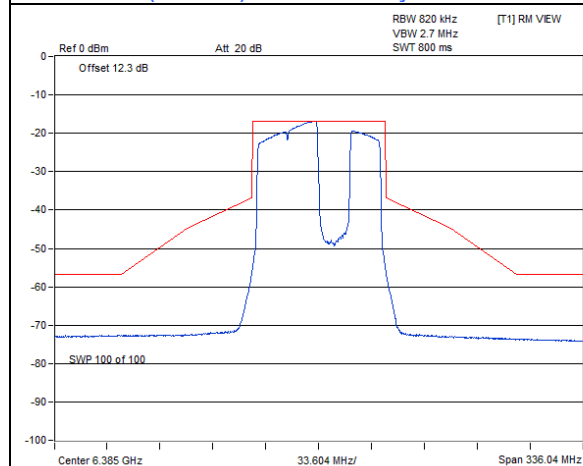

802.11be (EHT80) Punctured by 20 MHz / Chain 0 : CH 87


802.11be (EHT80) Punctured by 20 MHz / Chain 0 : CH 135

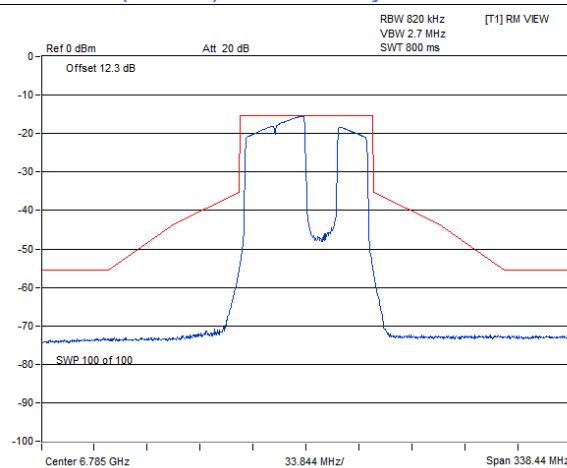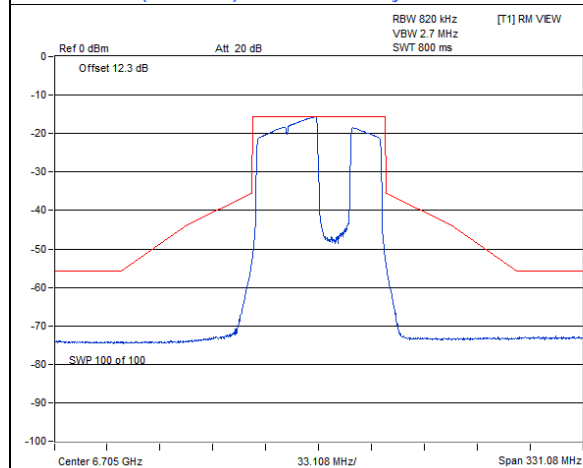


802.11be (EHT80) Punctured by 20 MHz / Chain 0 : CH 151

802.11be (EHT80) Punctured by 20 MHz / Chain 0 : CH 167


Spectrum Plot

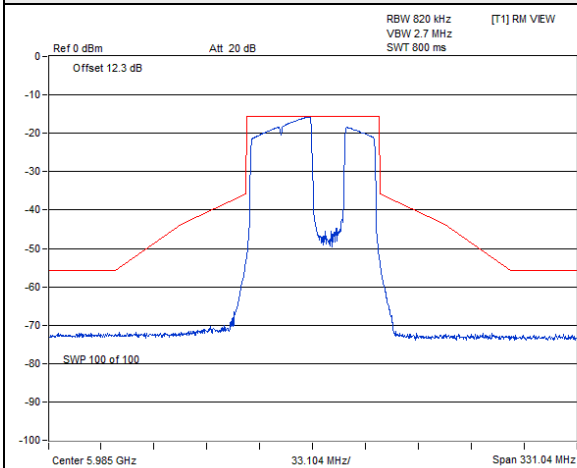


802.11be (EHT80) Punctured by 20 MHz / Chain 1 : CH 7

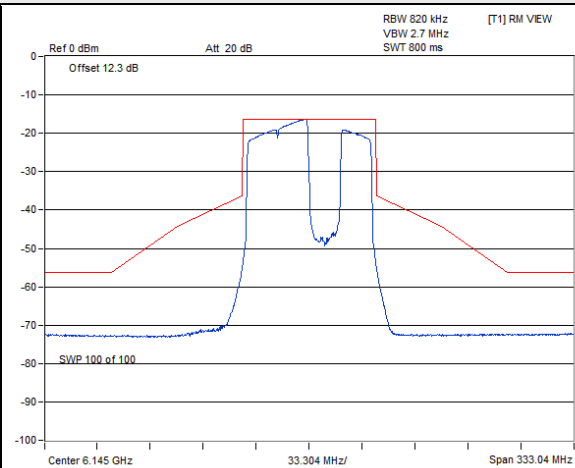


802.11be (EHT80) Punctured by 20 MHz / Chain 1 : CH 39

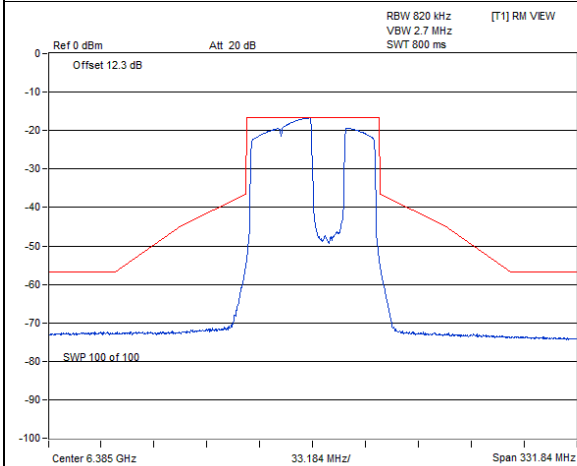


802.11be (EHT80) Punctured by 20 MHz / Chain 1 : CH 87

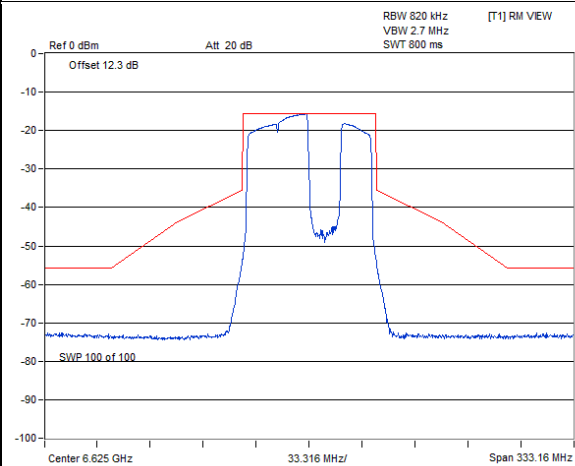

802.11be (EHT80) Punctured by 20 MHz / Chain 1 : CH 135

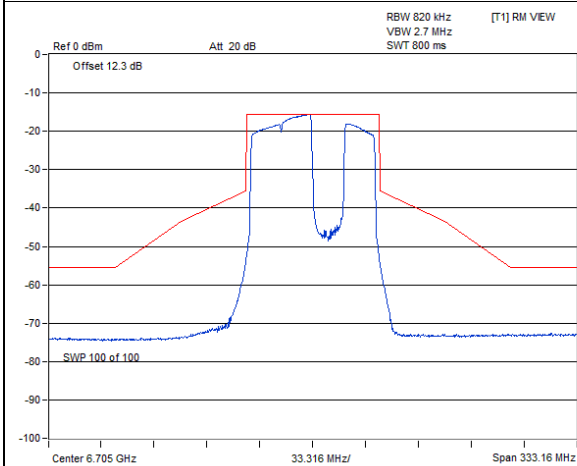



802.11be (EHT80) Punctured by 20 MHz / Chain 1 : CH 151

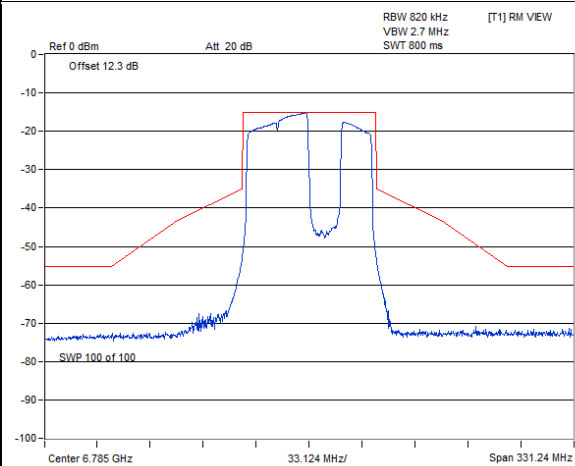



802.11be (EHT80) Punctured by 20 MHz / Chain 1 : CH 167

802.11be (EHT160) Punctured by 20 MHz



Spectrum Plot

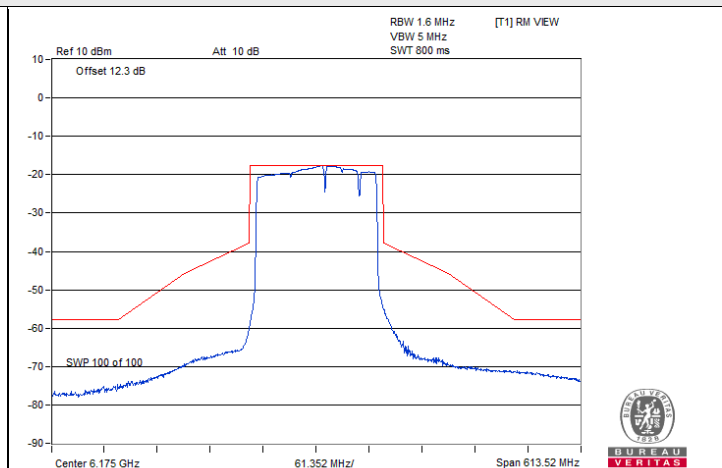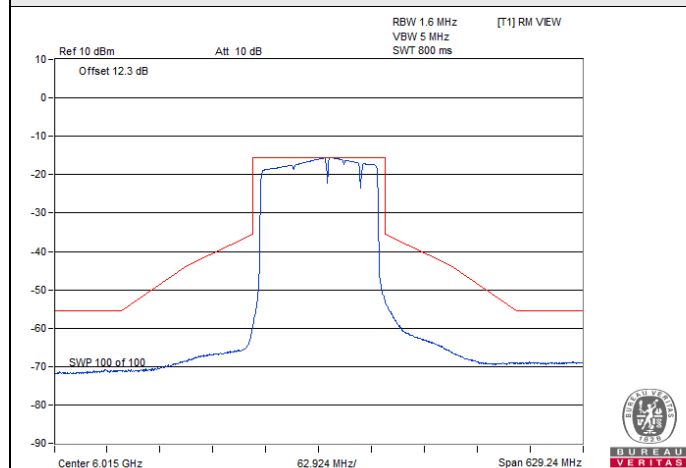

802.11be (EHT160) Punctured by 20 MHz / Chain 0 : CH 15 802.11be (EHT160) Punctured by 20 MHz / Chain 0 : CH 47

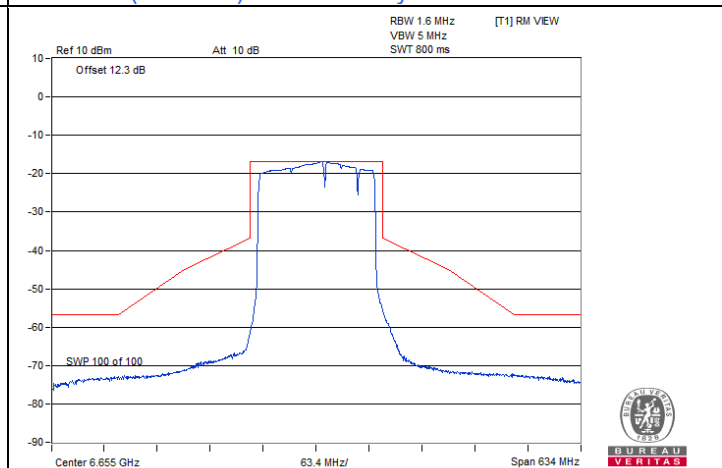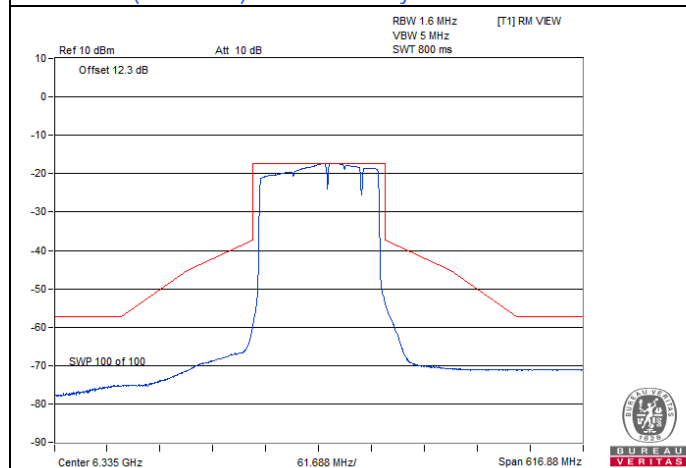


802.11be (EHT160) Punctured by 20 MHz / Chain 0 : CH 79 802.11be (EHT160) Punctured by 20 MHz / Chain 0 : CH 143

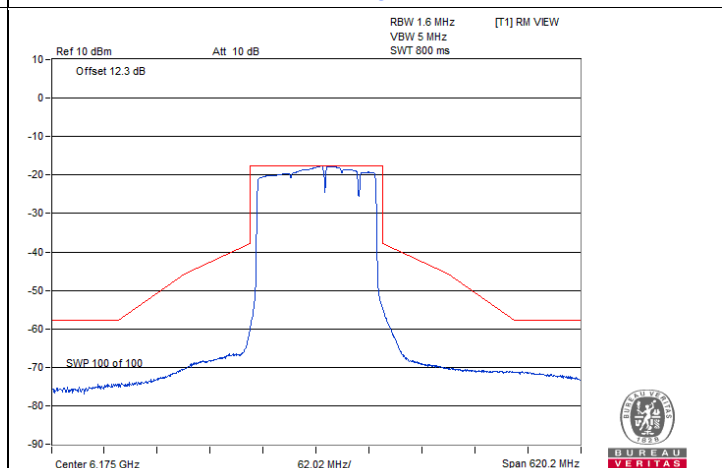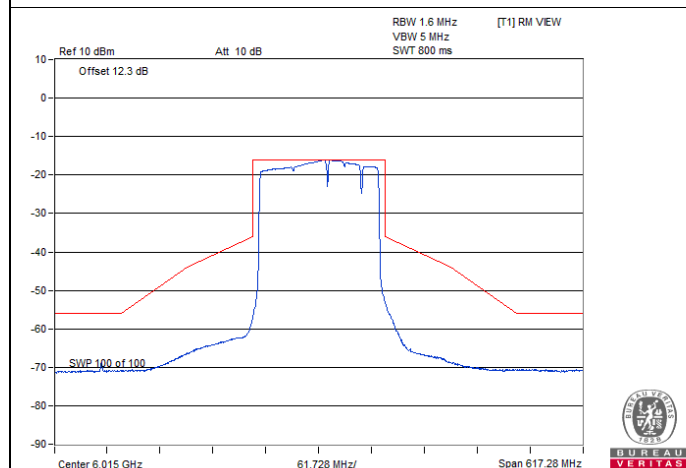


802.11be (EHT160) Punctured by 20 MHz / Chain 1 : CH 15 802.11be (EHT160) Punctured by 20 MHz / Chain 1 : CH 47

Spectrum Plot

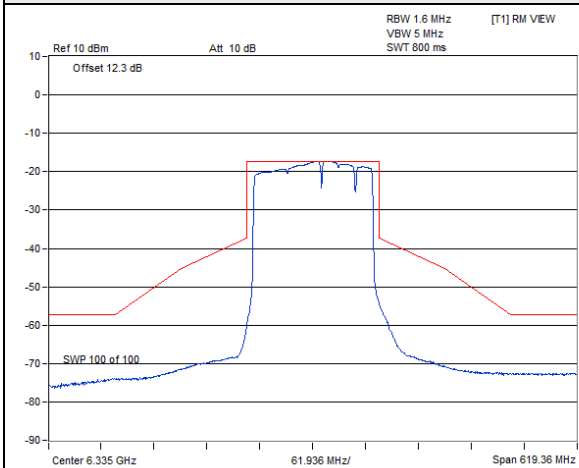



802.11be (EHT160) Punctured by 20 MHz / Chain 1 : CH 79

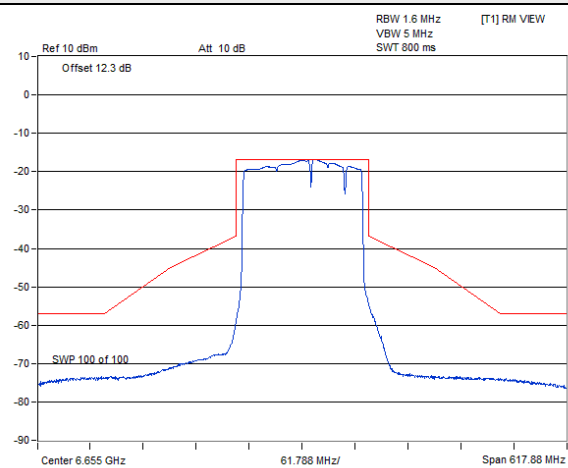



802.11be (EHT160) Punctured by 20 MHz / Chain 1 : CH 143

802.11be (EHT160) Punctured by 40 MHz



Spectrum Plot

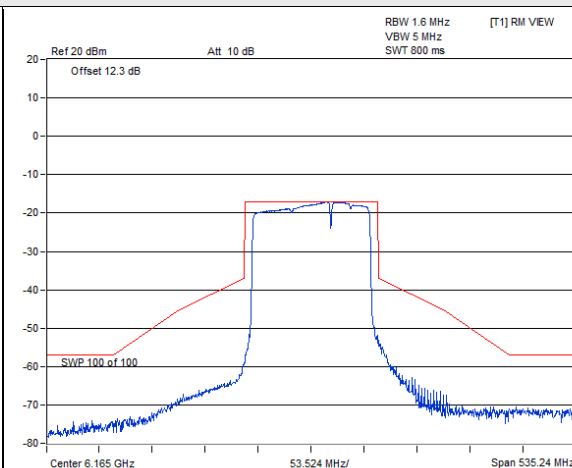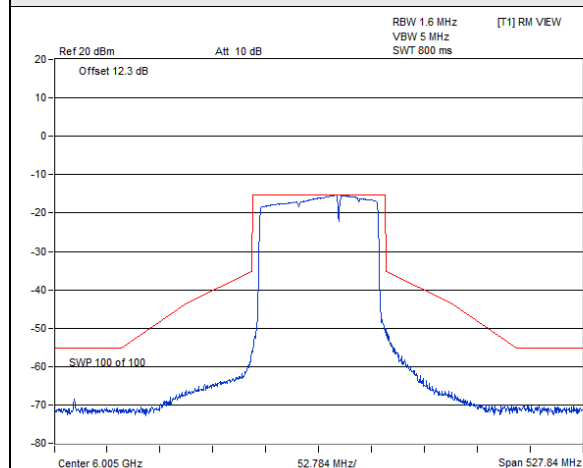

802.11be (EHT160) Punctured by 40 MHz / Chain 0 : CH 15 802.11be (EHT160) Punctured by 40 MHz / Chain 0 : CH 47

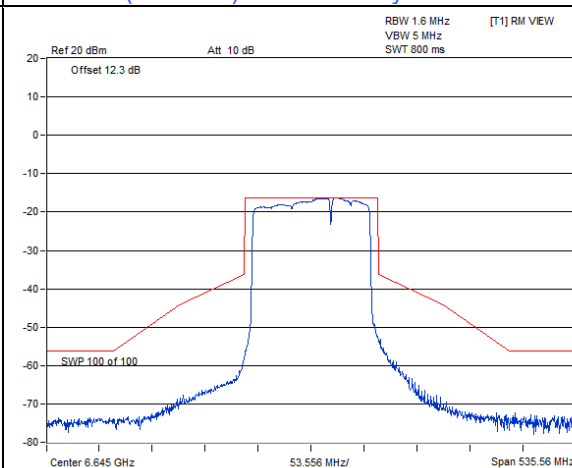
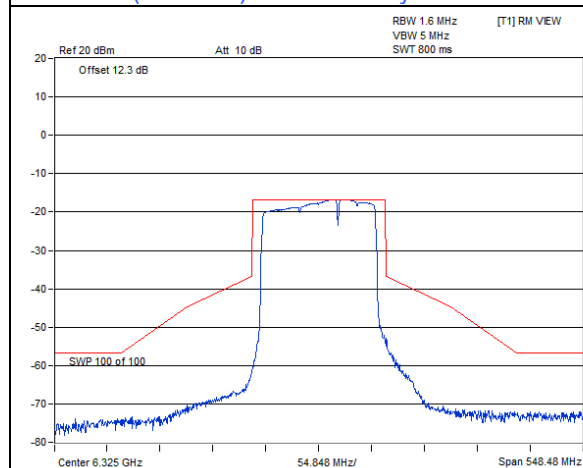


802.11be (EHT160) Punctured by 40 MHz / Chain 0 : CH 79 802.11be (EHT160) Punctured by 40 MHz / Chain 0 : CH 143

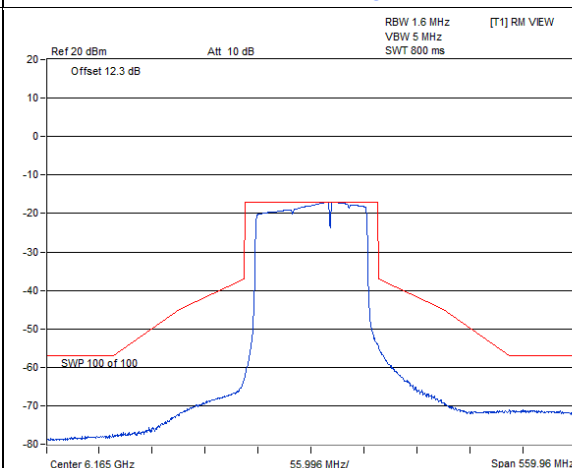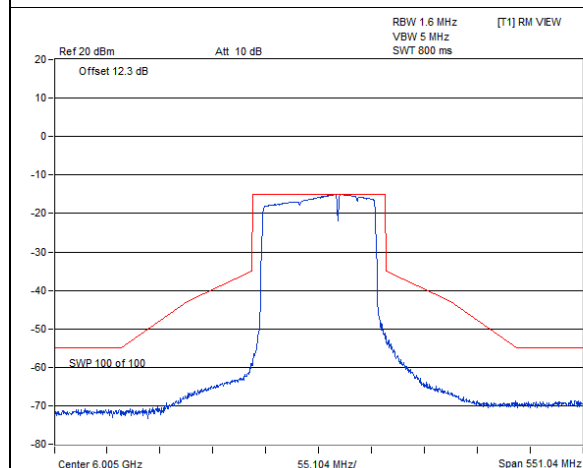



802.11be (EHT160) Punctured by 40 MHz / Chain 1 : CH 15 802.11be (EHT160) Punctured by 40 MHz / Chain 1 : CH 47

Spectrum Plot

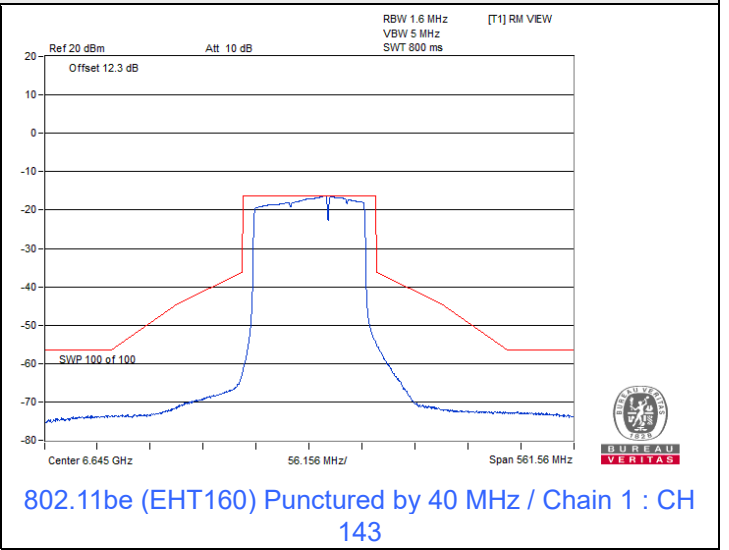
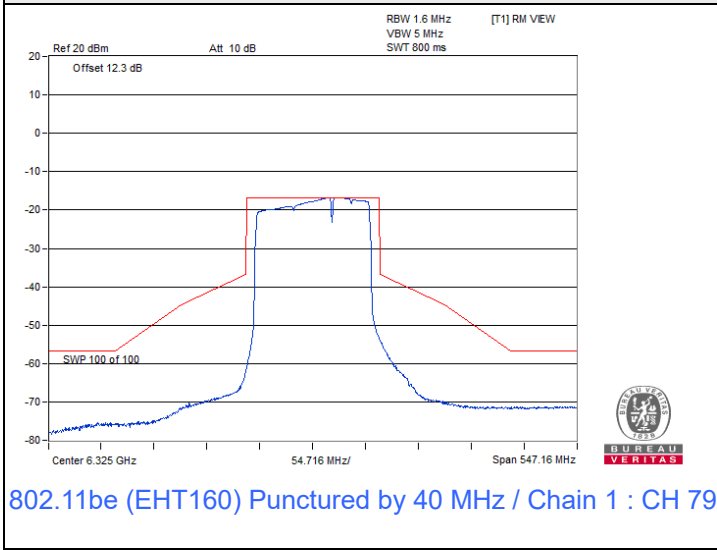


802.11be (EHT320) Punctured by 40 MHz

Spectrum Plot

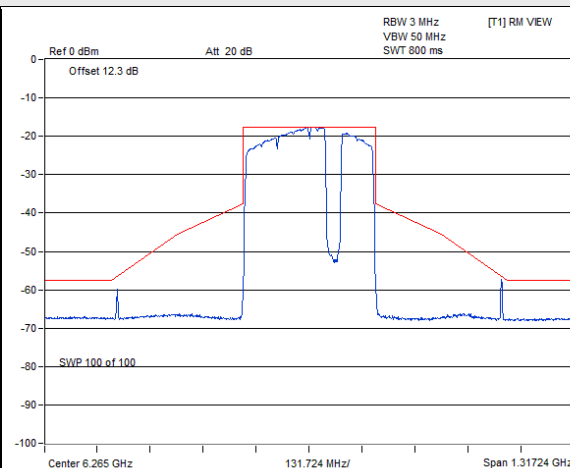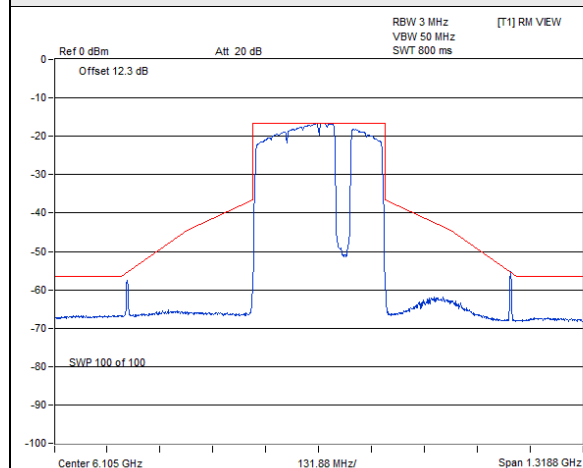



802.11be (EHT320) Punctured by 40 MHz / Chain 0 : CH 31 802.11be (EHT320) Punctured by 40 MHz / Chain 0 : CH 63

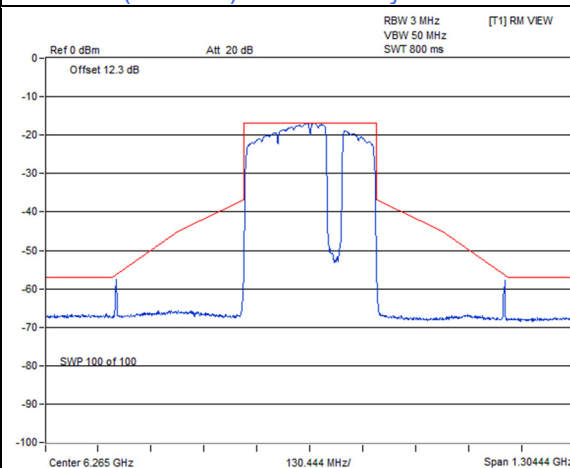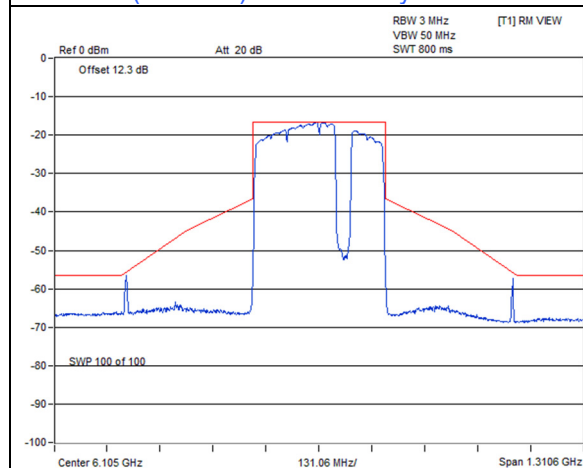



802.11be (EHT320) Punctured by 40 MHz / Chain 1 : CH 31 802.11be (EHT320) Punctured by 40 MHz / Chain 1 : CH 63

802.11be (EHT320) Punctured by 80 MHz

Spectrum Plot

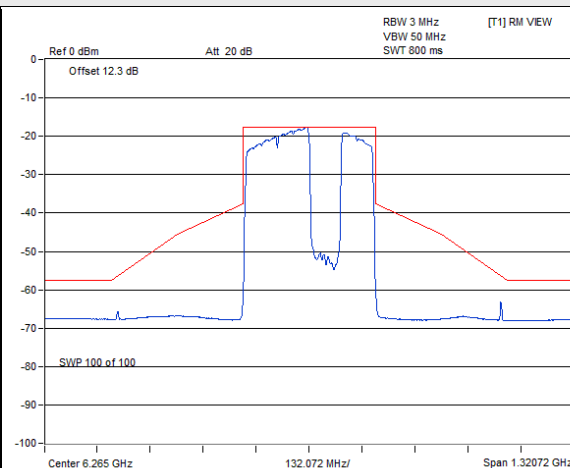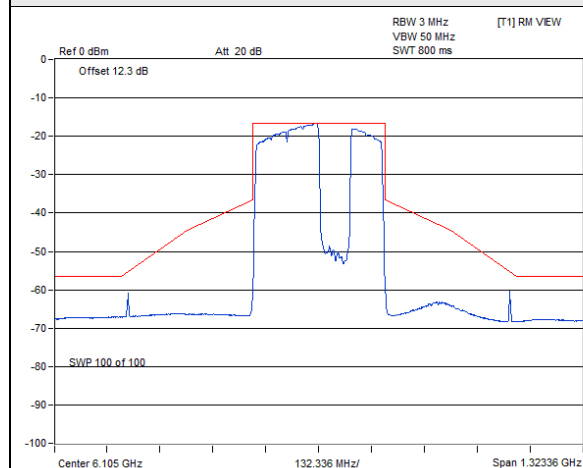


802.11be (EHT320) Punctured by 80 MHz / Chain 0 : CH 31 802.11be (EHT320) Punctured by 80 MHz / Chain 0 : CH 63

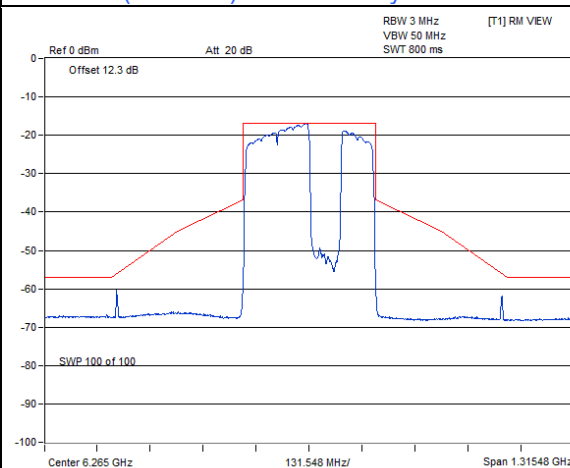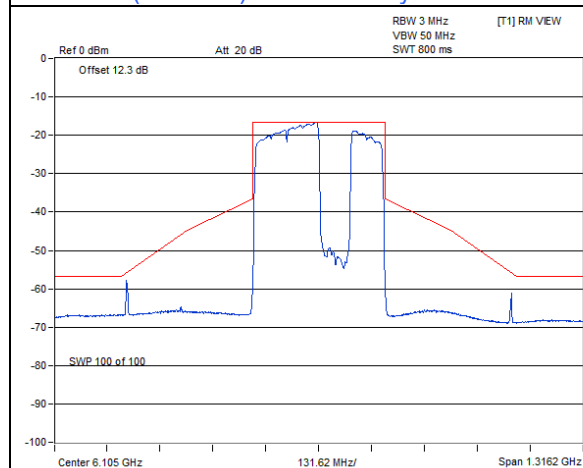


802.11be (EHT320) Punctured by 80 MHz / Chain 1 : CH 31 802.11be (EHT320) Punctured by 80 MHz / Chain 1 : CH 63

802.11be (EHT320) Punctured by 80+40 MHz


Spectrum Plot

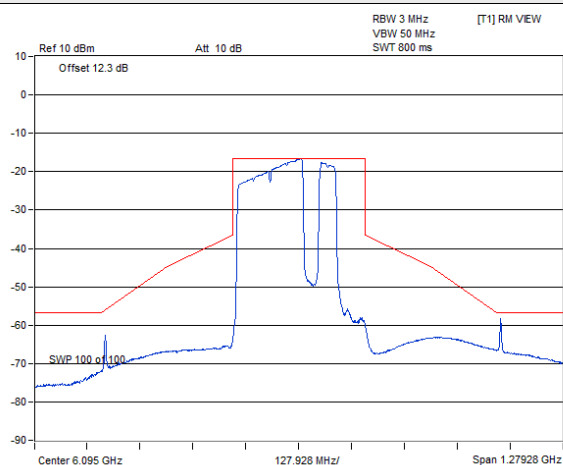


802.11be (EHT320) Punctured by 80+40 MHz / Chain 0 :
CH 31

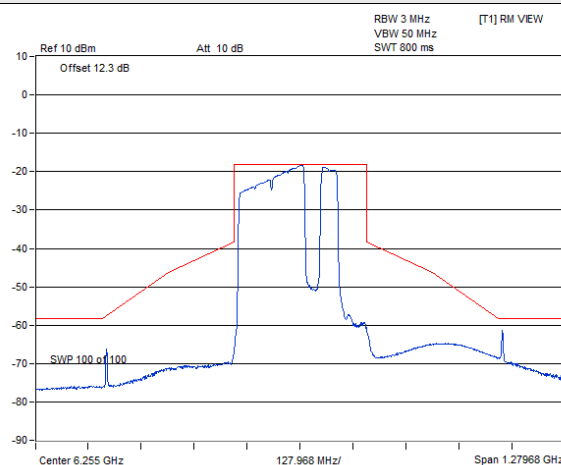

802.11be (EHT320) Punctured by 80+40 MHz / Chain 0 :
CH 63

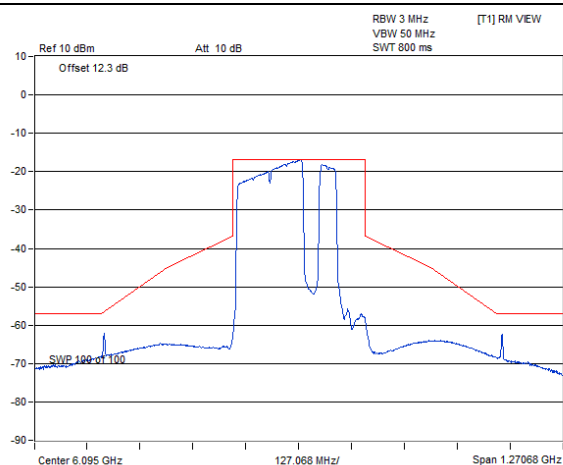

802.11be (EHT320) Punctured by 80+40 MHz / Chain 1 :
CH 31

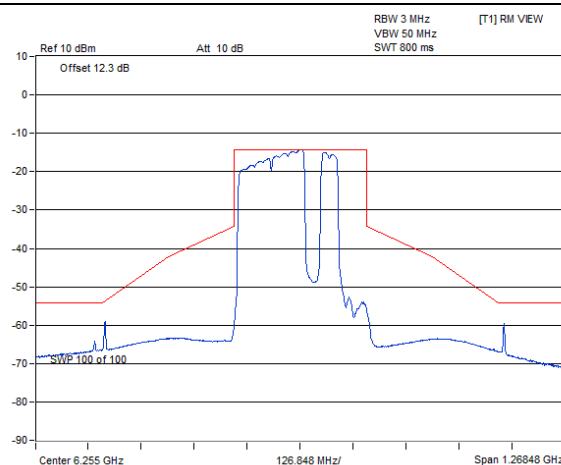

802.11be (EHT320) Punctured by 80+40 MHz / Chain 1 :
CH 63

7.5 Occupied Bandwidth

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Dolly Chung
--------------	---------	---------------------------	--------------	------------	-------------

1TX

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
2	5935	16.86
1	5955	16.86
45	6175	17.1
93	6415	16.8
117	6535	16.8
149	6695	16.92
181	6855	16.86

802.11be (EHT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
2	5935	19.08
1	5955	19.02
45	6175	19.08
93	6415	19.02
117	6535	19.02
149	6695	18.96
181	6855	19.02

802.11be (EHT40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
3	5965	37.8
43	6165	38.16
91	6405	38.28
123	6565	38.28
155	6725	38.28
179	6845	37.8

802.11be (EHT80)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
7	5985	76.8
39	6145	76.56
87	6385	76.56
135	6625	76.8
151	6705	76.56
167	6785	76.56

802.11be (EHT160)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
15	6025	156.96
47	6185	156.48
79	6345	156.48
143	6665	156

802.11be (EHT320)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
31	6105	311.68
63	6265	311.04

802.11be (EHT20) 26-tone RU

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
2	5935	18.6
1	5955	18.54
45	6175	18.48
93	6415	18.54
117	6535	18.54
149	6695	18.54
181	6855	18.54


802.11be (EHT20) 52-tone RU

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
2	5935	18.24
1	5955	18.3
45	6175	18.42
93	6415	18.06
117	6535	18
149	6695	18.24
181	6855	18.24


802.11be (EHT20) 106-tone RU

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
2	5935	18.36
1	5955	18.24
45	6175	18.24
93	6415	18.18
117	6535	18.18
149	6695	18.24
181	6855	18.3


Spectrum Plot of Maximum Value

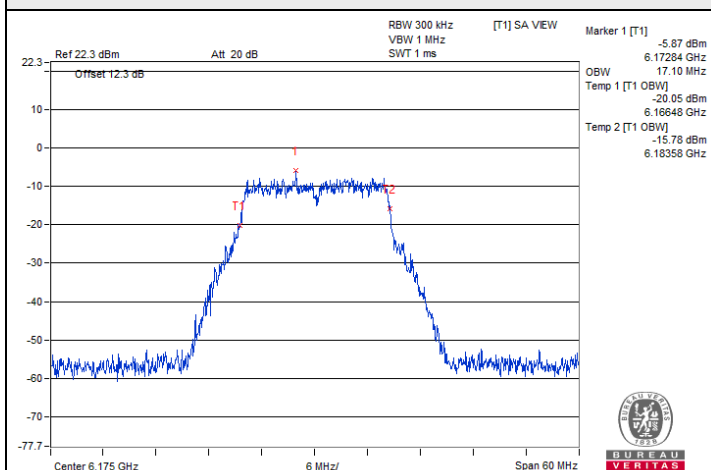


802.11a : CH 45

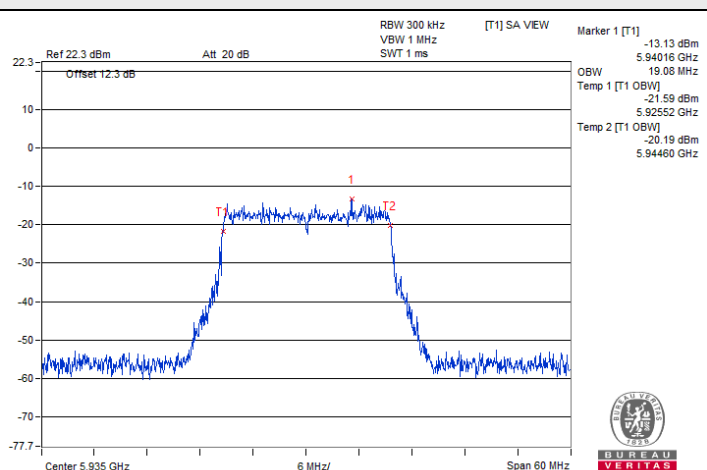


802.11be (EHT20) : CH 2

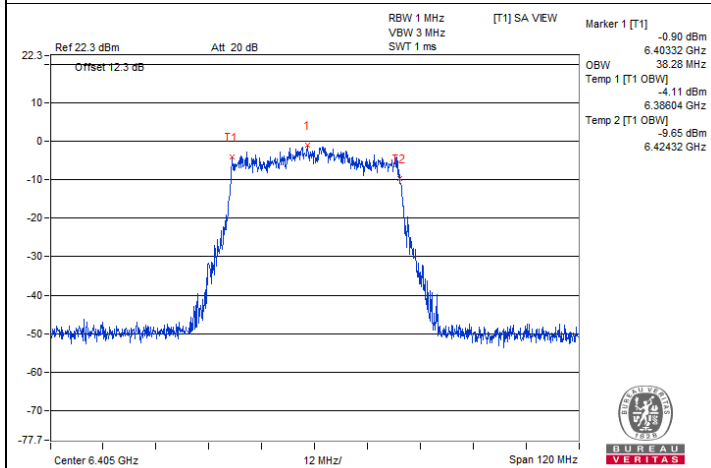


802.11be (EHT40) : CH 91

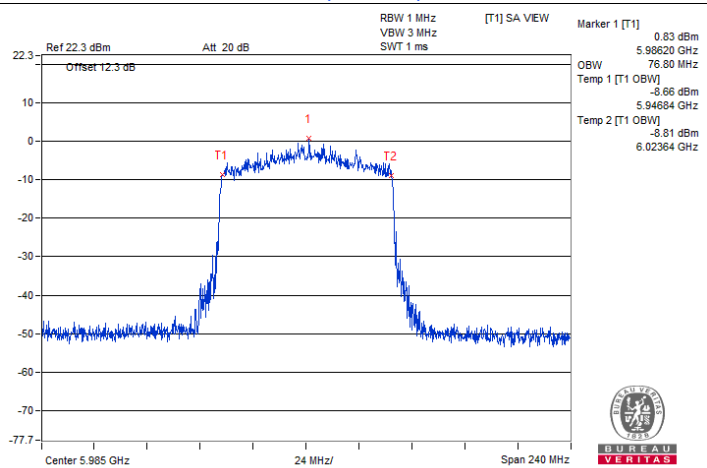

802.11be (EHT80) : CH 7

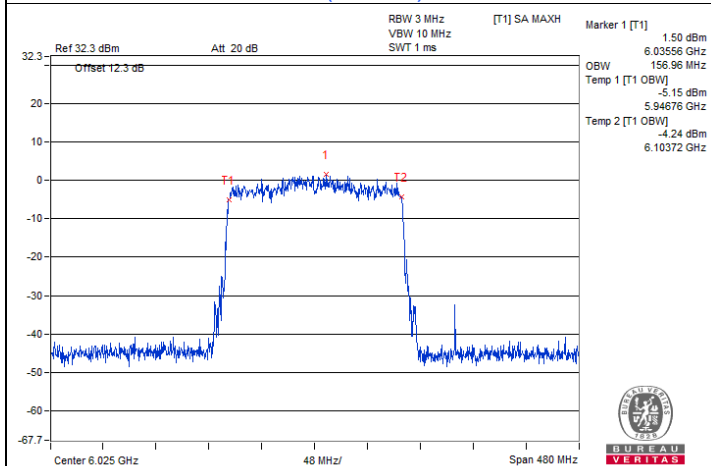


802.11be (EHT160) : CH 15

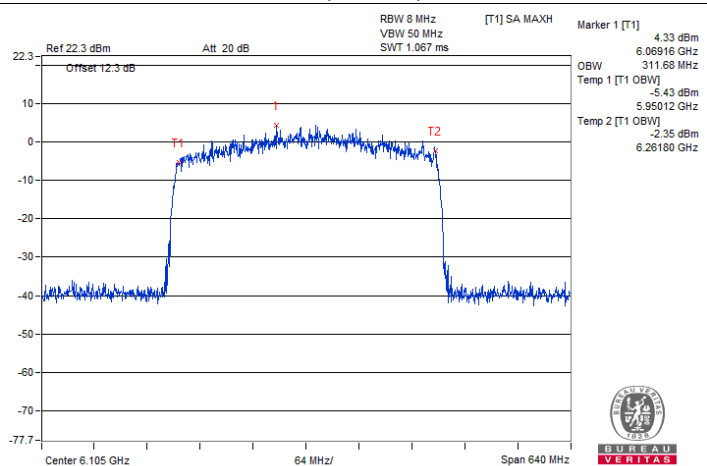


802.11be (EHT320) : CH 31


Spectrum Plot of Maximum Value

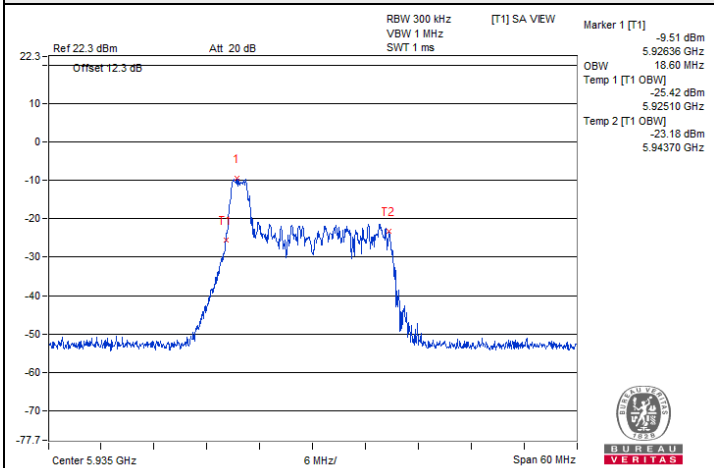

802.11be (EHT20) 26-tone RU : CH 2

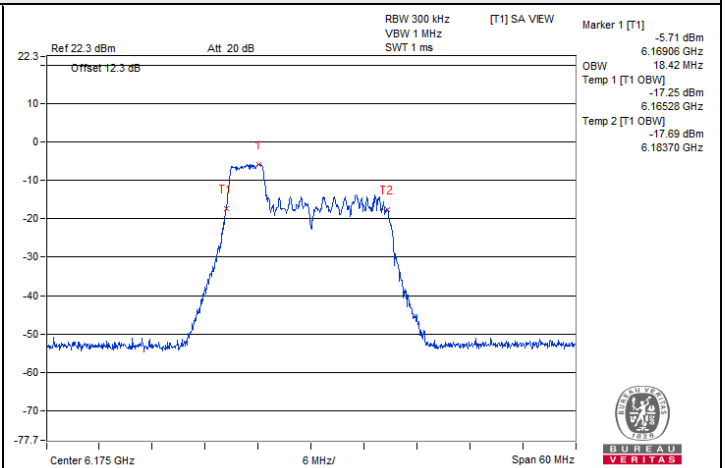

802.11be (EHT20) 52-tone RU : CH 45

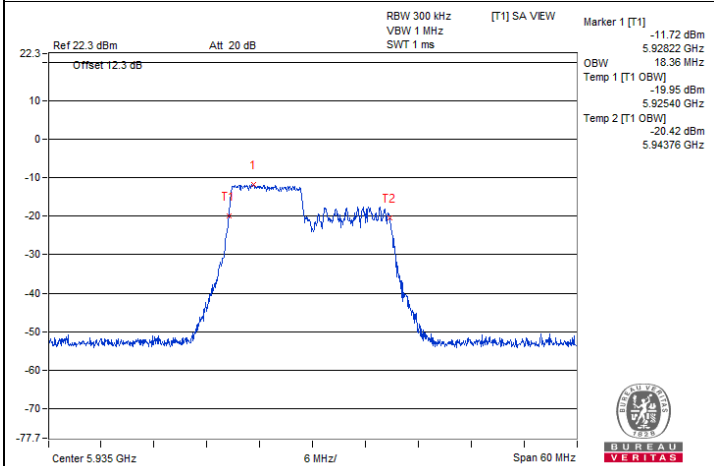

802.11be (EHT20) 106-tone RU : CH 2

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Dolly Chung
--------------	---------	---------------------------	--------------	------------	-------------

2TX

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
2	5935	16.92	16.86
1	5955	16.92	16.80
45	6175	16.92	16.86
93	6415	16.80	16.92
117	6535	16.92	16.86
149	6695	16.74	16.92
181	6855	16.92	16.98

802.11be (EHT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
2	5935	19.08	19.02
1	5955	19.02	19.08
45	6175	19.02	19.08
93	6415	19.02	19.02
117	6535	19.02	19.14
149	6695	19.02	19.08
181	6855	19.14	19.14

802.11be (EHT40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
3	5965	38.04	37.92
43	6165	37.92	37.80
91	6405	37.92	37.92
123	6565	37.80	37.92
155	6725	37.92	38.04
179	6845	37.92	37.92

802.11be (EHT80)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
7	5985	76.56	76.56
39	6145	76.32	76.80
87	6385	76.80	76.80
135	6625	76.80	76.80
151	6705	76.80	77.04
167	6785	76.80	76.80

802.11be (EHT160)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
15	6025	156.96	156.48
47	6185	156.96	156.48
79	6345	156.00	156.48
143	6665	156.96	156.48

802.11be (EHT320)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
31	6105	310.40	311.04
63	6265	309.76	309.76

802.11be (EHT20) 26-tone RU

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
2	5935	18.90	18.78
1	5955	18.72	18.60
45	6175	18.66	18.48
93	6415	18.60	18.48
117	6535	18.66	18.54
149	6695	18.36	18.48
181	6855	18.66	18.60







802.11be (EHT20) 52-tone RU

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
2	5935	18.42	18.54
1	5955	18.36	18.54
45	6175	18.30	18.30
93	6415	18.30	18.24
117	6535	18.18	18.42
149	6695	18.42	18.24
181	6855	18.18	18.36


802.11be (EHT20) 106-tone RU

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
2	5935	18.36	18.36
1	5955	18.18	18.24
45	6175	18.24	18.18
93	6415	18.24	18.30
117	6535	18.18	18.06
149	6695	18.36	18.18
181	6855	18.30	18.12


Spectrum Plot of Maximum Value

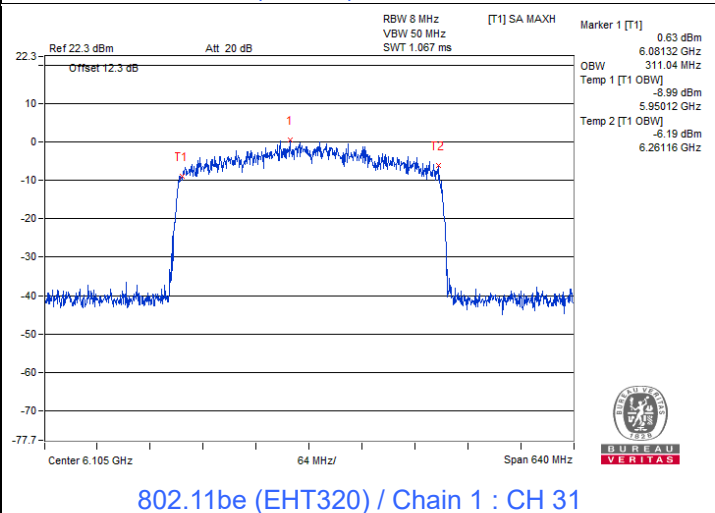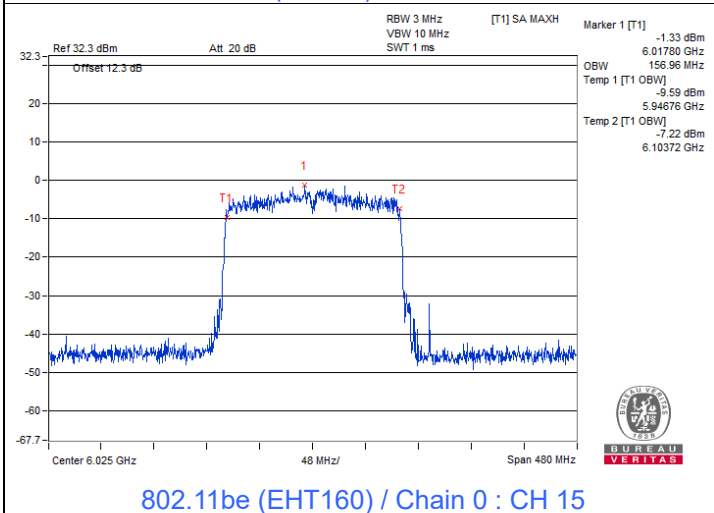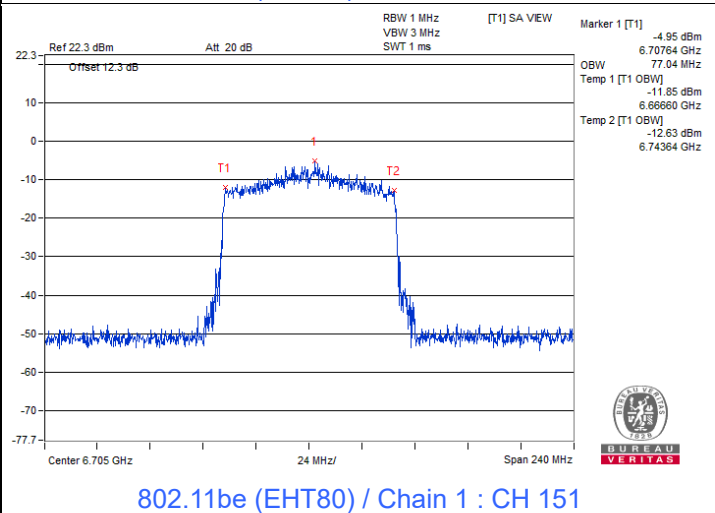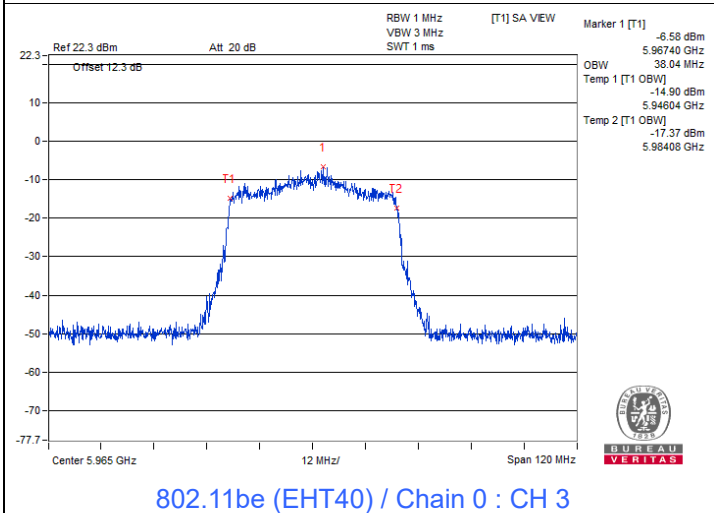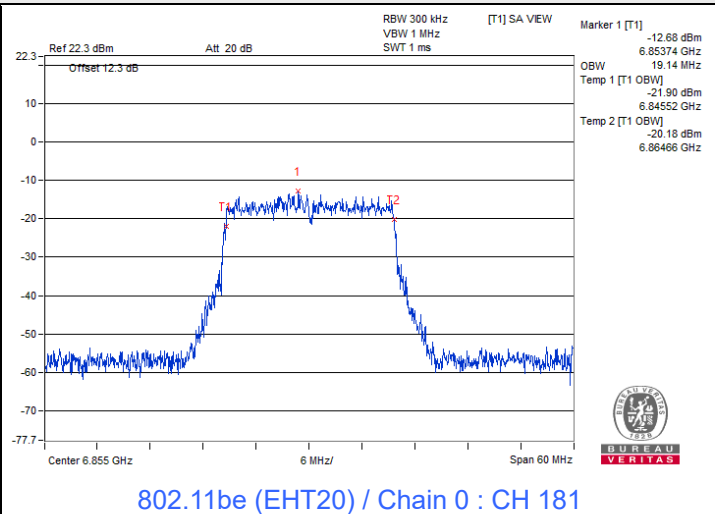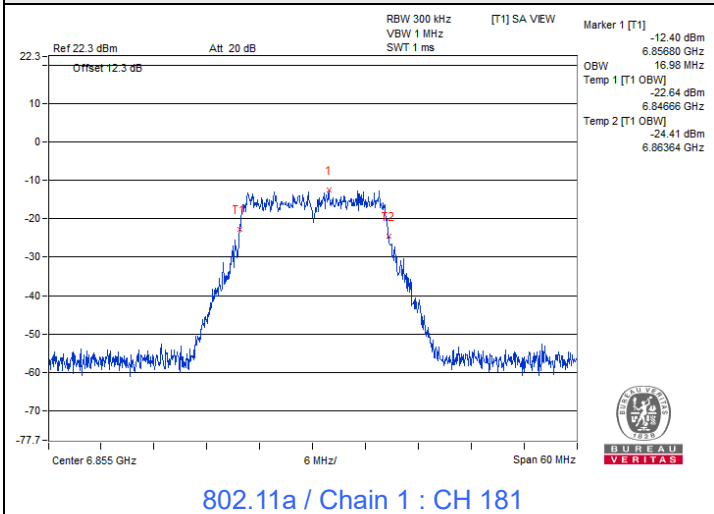


Spectrum Plot of Maximum Value

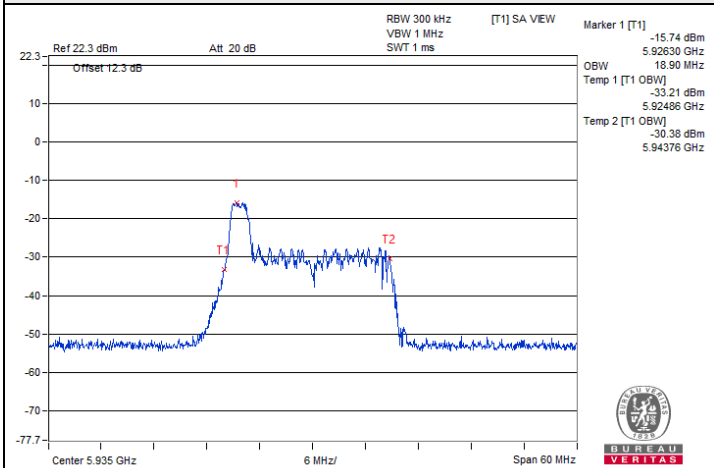

802.11be (EHT20) 26-tone RU / Chain 0 : CH 2

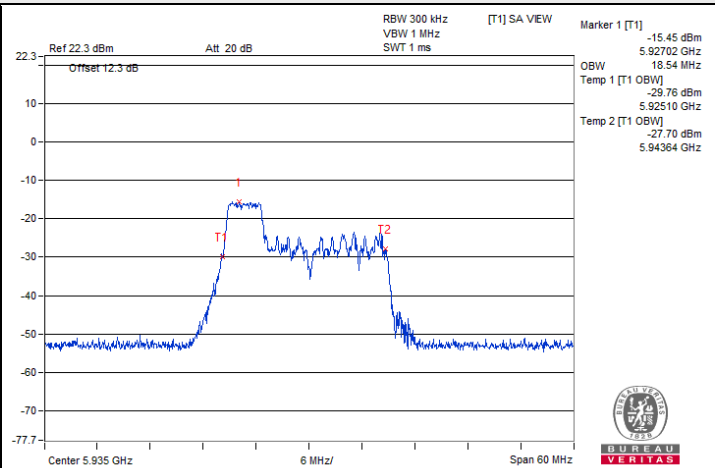

802.11be (EHT20) 52-tone RU / Chain 1 : CH 2

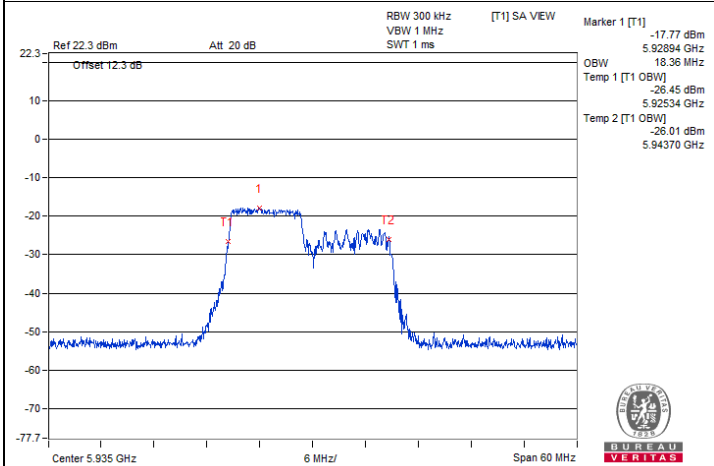

802.11be (EHT20) 106-tone RU / Chain 0 : CH 2

7.6 Contention-based Protocol

The Minimum Antenna Gain for Contention-based Protocol Testing

Band	Antenna Type	The minimum antenna gain (dBi)
U-NII-5 ~ U-NII-8	Monopole, PIFA ^{note1}	-2

Note 1: The test was evaluated by conducted method, so no physical antenna was actually used.

Note 2: Based on the current test results and appropriate calculation and evaluation, the minimum antenna gain value that can meet the regulatory threshold of -62 dBm/MHz is -2 dBi.

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Cherry Chuo
--------------	---------	---------------------------	--------------	------------	-------------

Companion Device Information			
Product	Brand	Model No.	Software/Firmware Version
Qualcomm WiFi 7/BT Combo module	Qualcomm	QCNCM865	3.1.0.1370

Note: Device does not use channel puncturing but does use bandwidth reduction for CBP function.

For U-NII-5


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	5	5975	5975	-64.23	4.75	0	-68.98	-62	OFF
					-64.73	4.75	0	-69.48	-62	Minimal
					-77.25	4.75	0	-82	-62	ON
	320	31	6105	5950	-64.22	4.75	0	-68.97	-62	OFF
					-64.72	4.75	0	-69.47	-62	Minimal
					-77.25	4.75	0	-82	-62	ON
				6105	-64.42	4.75	0	-69.17	-62	OFF
					-64.92	4.75	0	-69.67	-62	Minimal
					-77.25	4.75	0	-82	-62	ON
				6260	-64.11	4.75	0	-68.86	-62	OFF
					-64.61	4.75	0	-69.36	-62	Minimal
					-77.25	4.75	0	-82	-62	ON

Notes:


1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	5975	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	5950	v	v	v	v	v	x	v	v	v	v	90%	90%	Pass
		6105	v	v	x	v	v	v	v	v	v	v	90%	90%	Pass
		6260	v	v	v	v	v	v	v	v	v	v	v	100%	90%


Plots of EUT Tx waveform

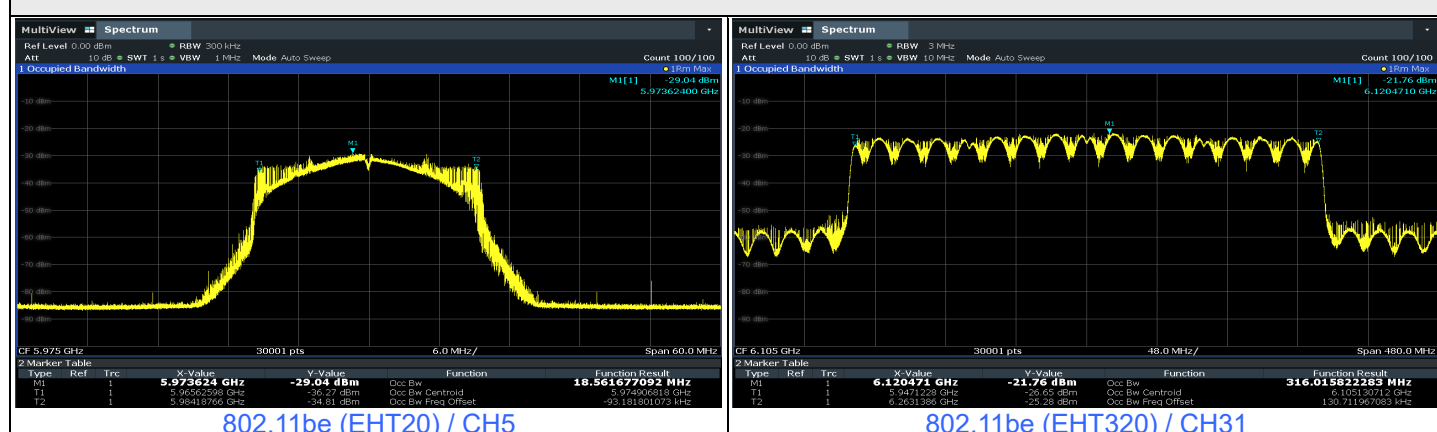


Plots of Injected signal (AWGN) level

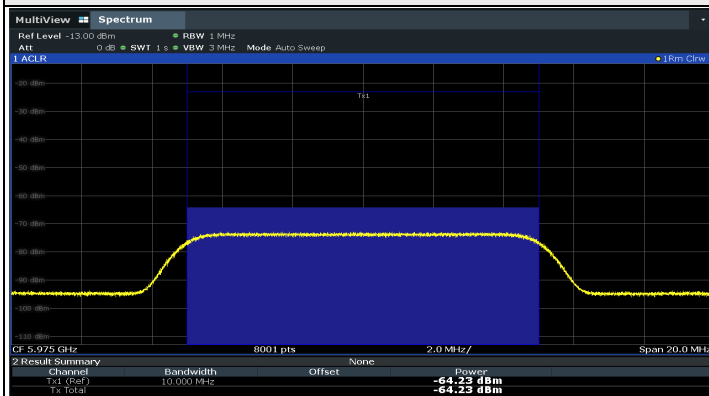


802.11be (EHT20) / CH5

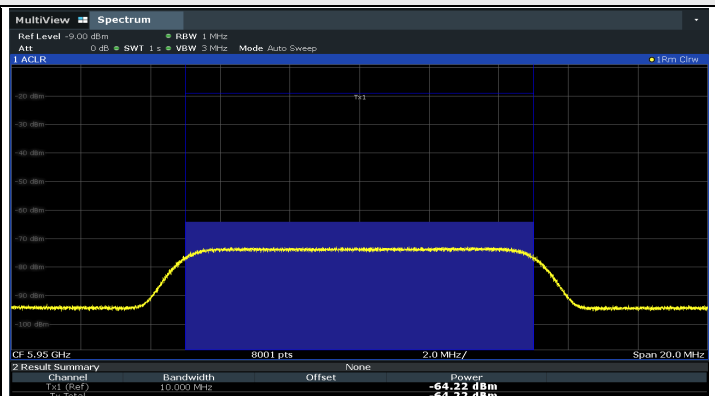

802.11be (EHT320) / CH31(Low Edge)

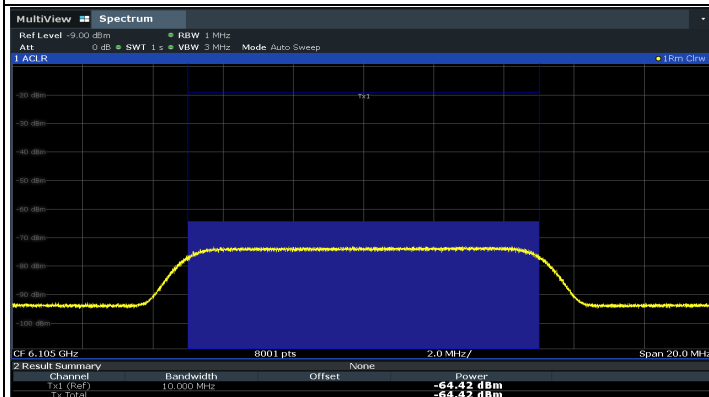


802.11be (EHT320) / CH31(Middle)

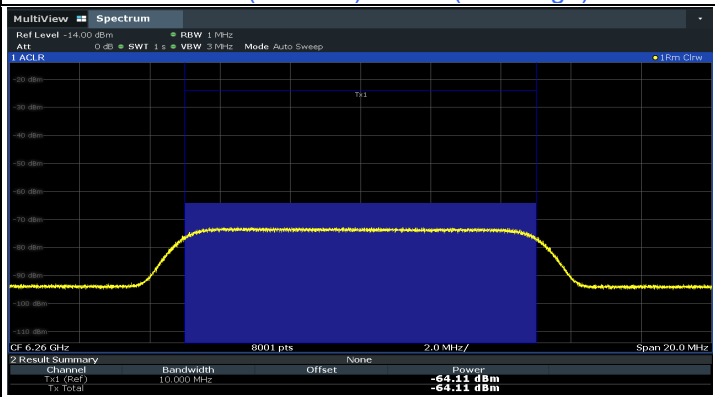

802.11be (EHT320) / CH31(High Edge)

Plots of EUT ceased transmission in the time domain


UNII5_20M_5975_Test Result

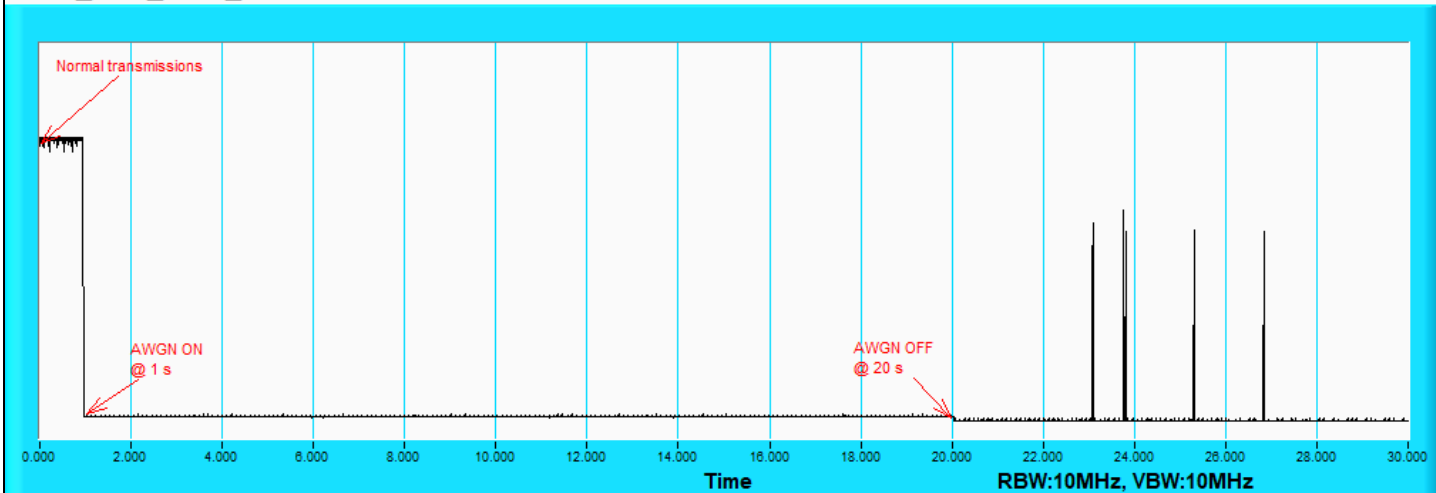

802.11be (EHT20) / CH5


Plots of EUT ceased transmission in the time domain

11be320 6G_CH 31_5950

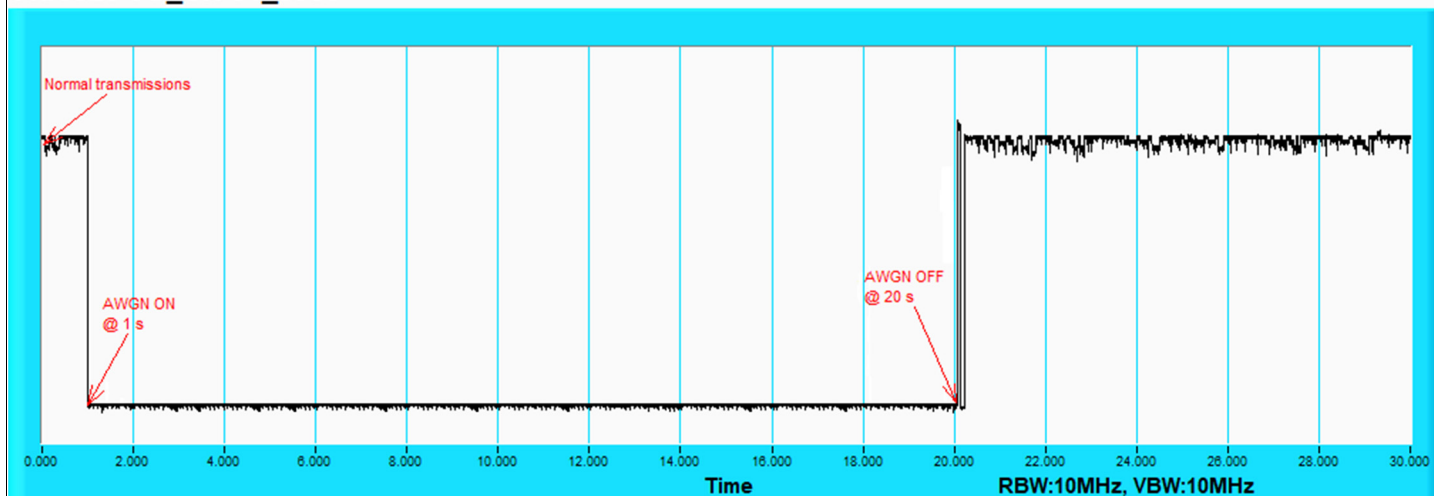


802.11be (EHT320) / CH31(Low Edge)

UNII5_320M_6105_Test Result

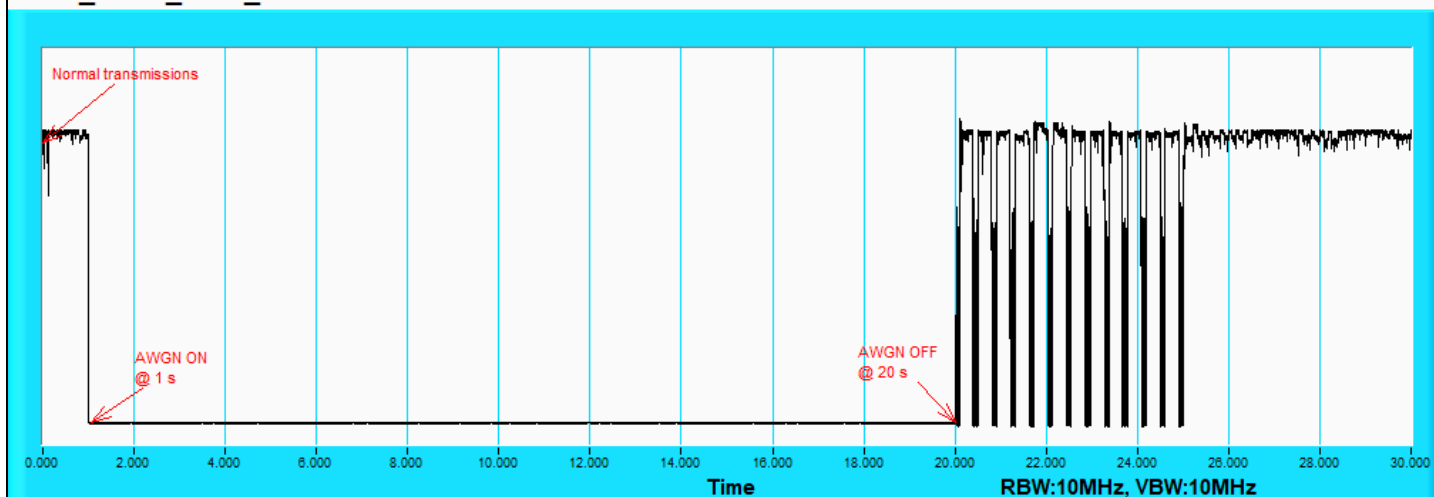

802.11be (EHT320) / CH31(Middle)

UNII5_320M_6260_Test Result

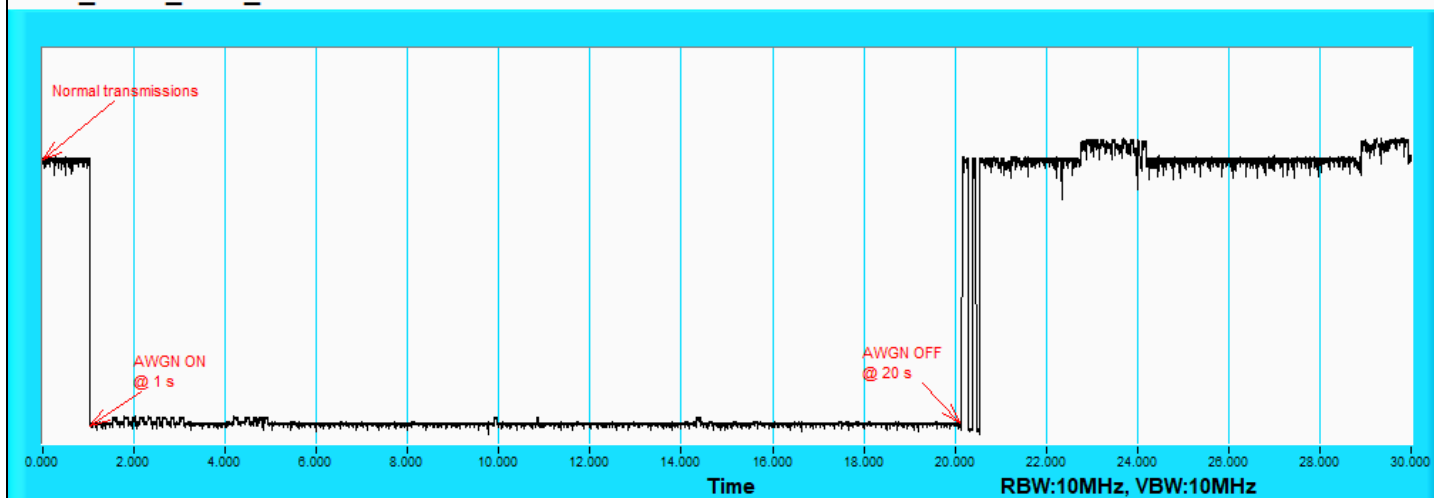

802.11be (EHT320) / CH31(High Edge)

For U-NII-7


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	149	6695	6695	-64.4	4.81	0	-69.21	-62	OFF
					-64.9	4.81	0	-69.71	-62	Minimal
					-77.19	4.81	0	-82	-62	ON
	160	143	6590	6590	-64.17	4.81	0	-68.98	-62	OFF
					-64.67	4.81	0	-69.48	-62	Minimal
					-77.19	4.81	0	-82	-62	ON
		143	6665	6665	-64.62	4.81	0	-69.43	-62	OFF
					-65.12	4.81	0	-69.93	-62	Minimal
					-77.19	4.81	0	-82	-62	ON
		143	6740	6740	-64.25	4.81	0	-69.06	-62	OFF
					-64.75	4.81	0	-69.56	-62	Minimal
					-77.19	4.81	0	-82	-62	ON

Notes:


1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6695	v	v	v	x	v	v	v	v	v	v	90%	90%	Pass
	160	6590	v	v	x	v	v	v	v	v	v	v	90%	90%	Pass
		6665	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6740	v	x	v	v	v	v	v	v	v	v	90%	90%	Pass

Plots of EUT Tx waveform

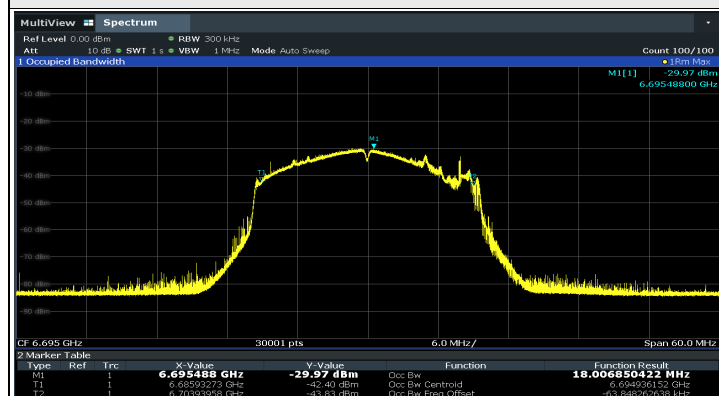


802.11be (EHT20) / CH149

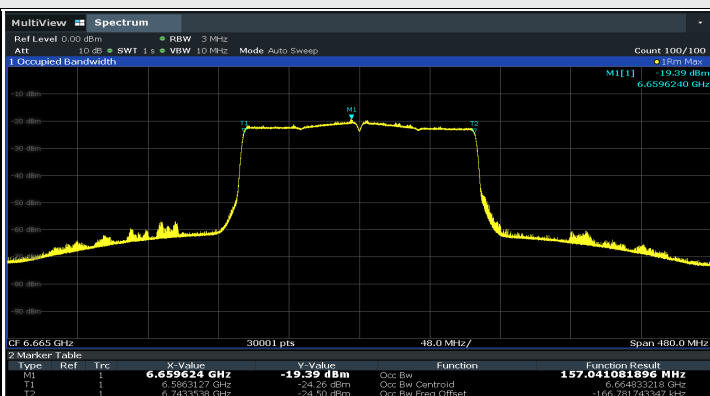


802.11be (EHT160) / CH143


Plots of Injected signal (AWGN) level

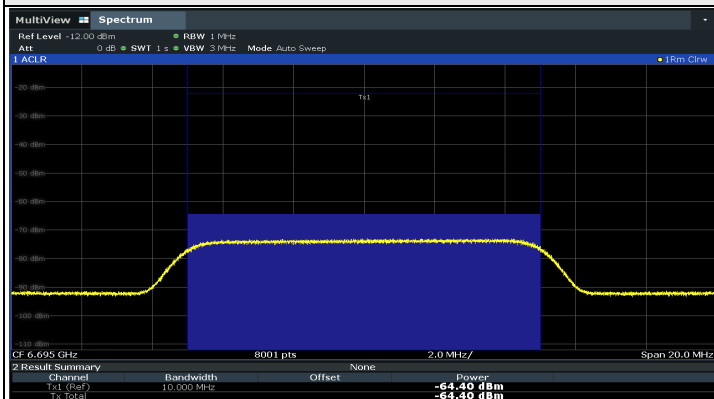


802.11be (EHT20) / CH149

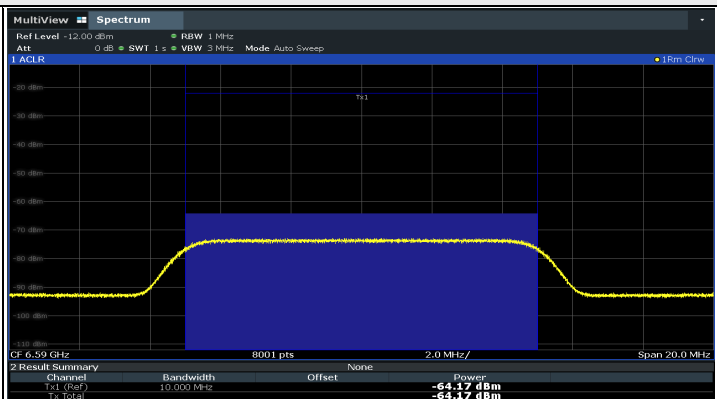

802.11be (EHT160) / CH143(Low Edge)

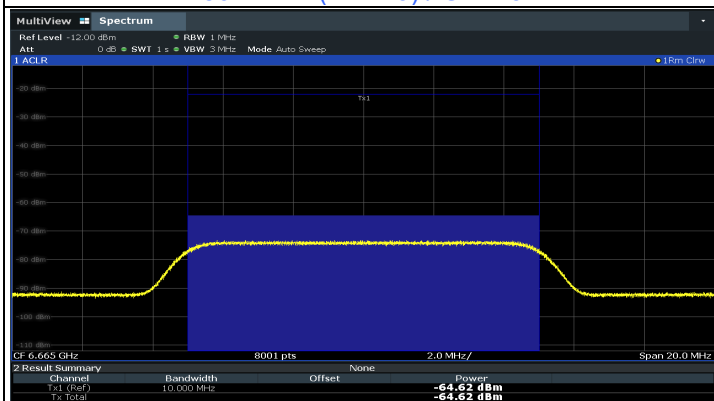


802.11be (EHT160) / CH143(Middle)

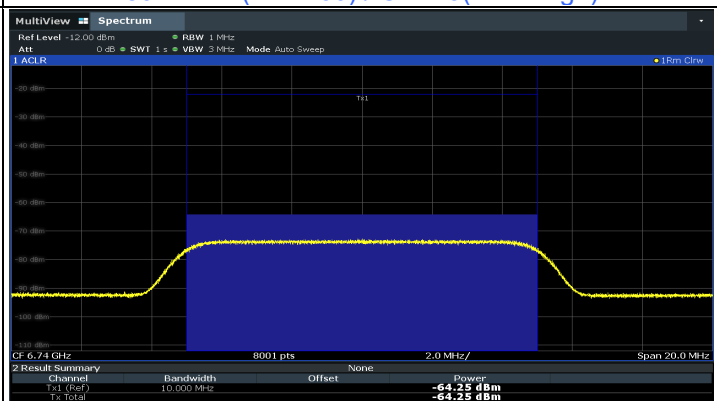

802.11be (EHT160) / CH143(High Edge)

Plots of EUT ceased transmission in the time domain


UNII7_20M_6695_Test Result

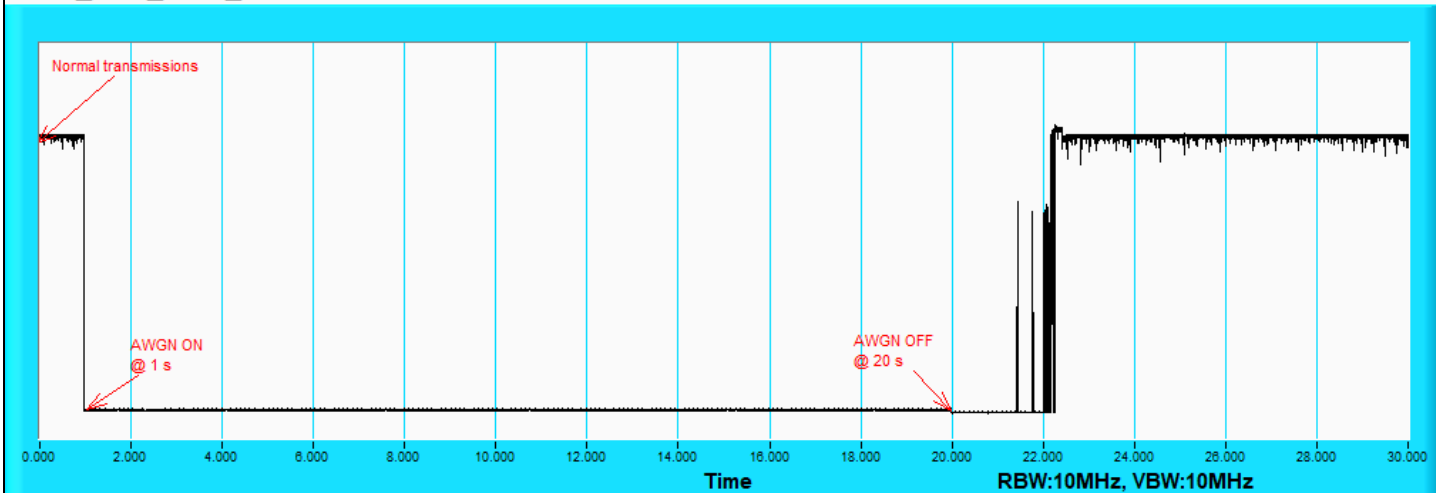

802.11be (EHT20) / CH149


Plots of EUT ceased transmission in the time domain

UNII7_160M_6590_Test Result

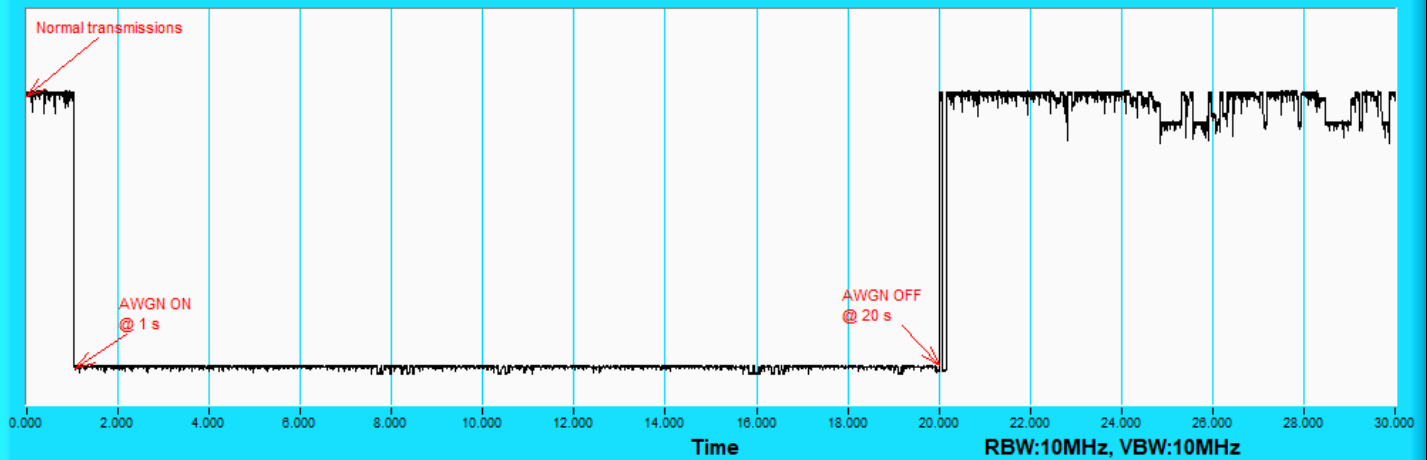


802.11be (EHT160) / CH143(Low Edge)

UNII7_160M_6665_Test Result

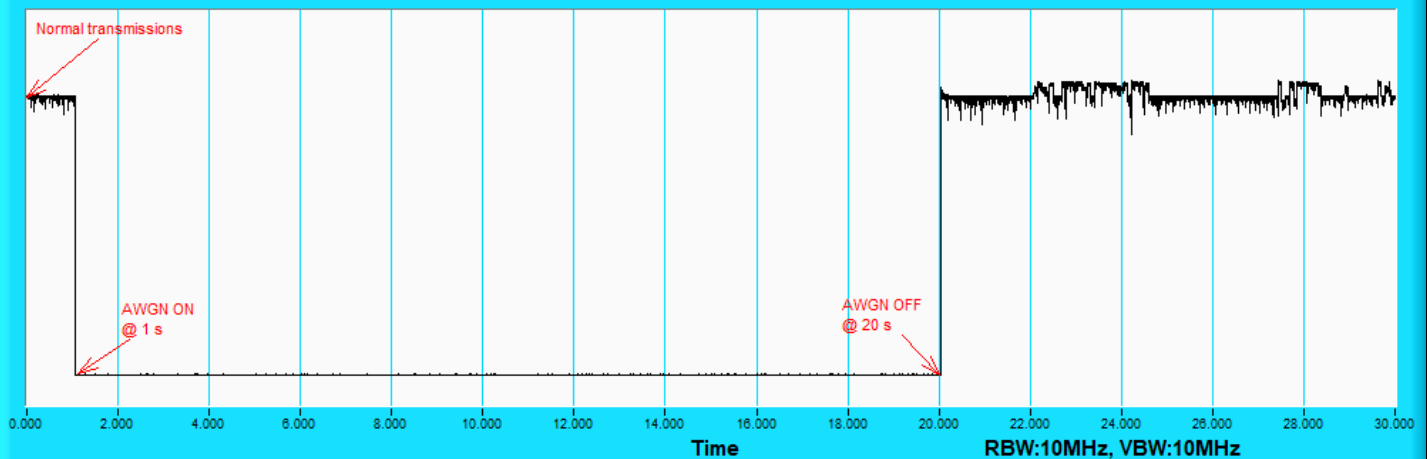

802.11be (EHT160) / CH143(Middle)


UNII7_160M_6740_Test Result

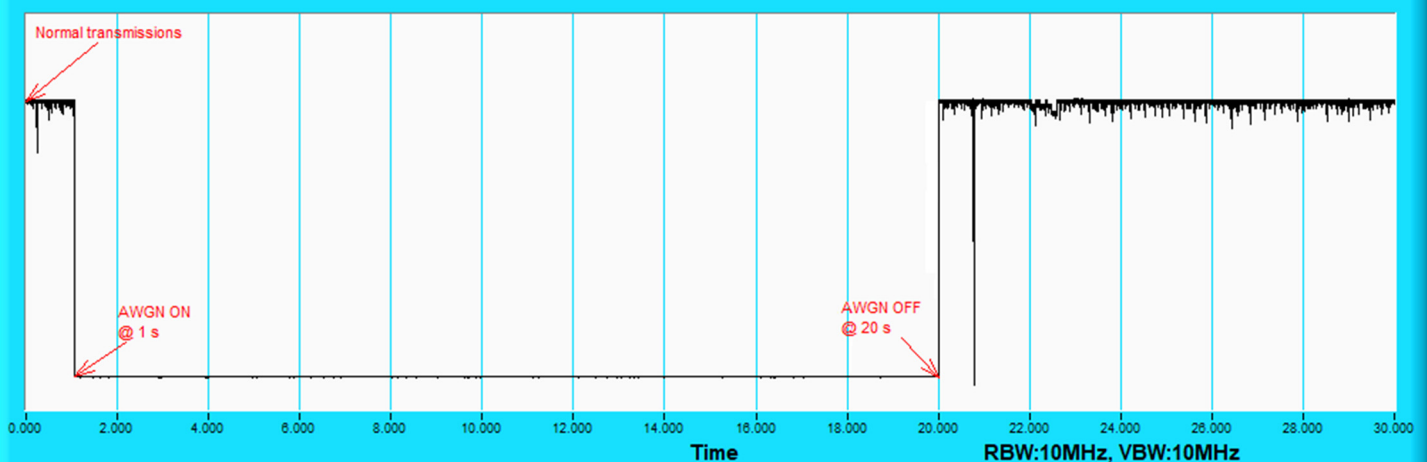

802.11be (EHT160) / CH143(High Edge)

Verify bandwidth reduction

Plots of EUT ceased transmission in the frequency domain

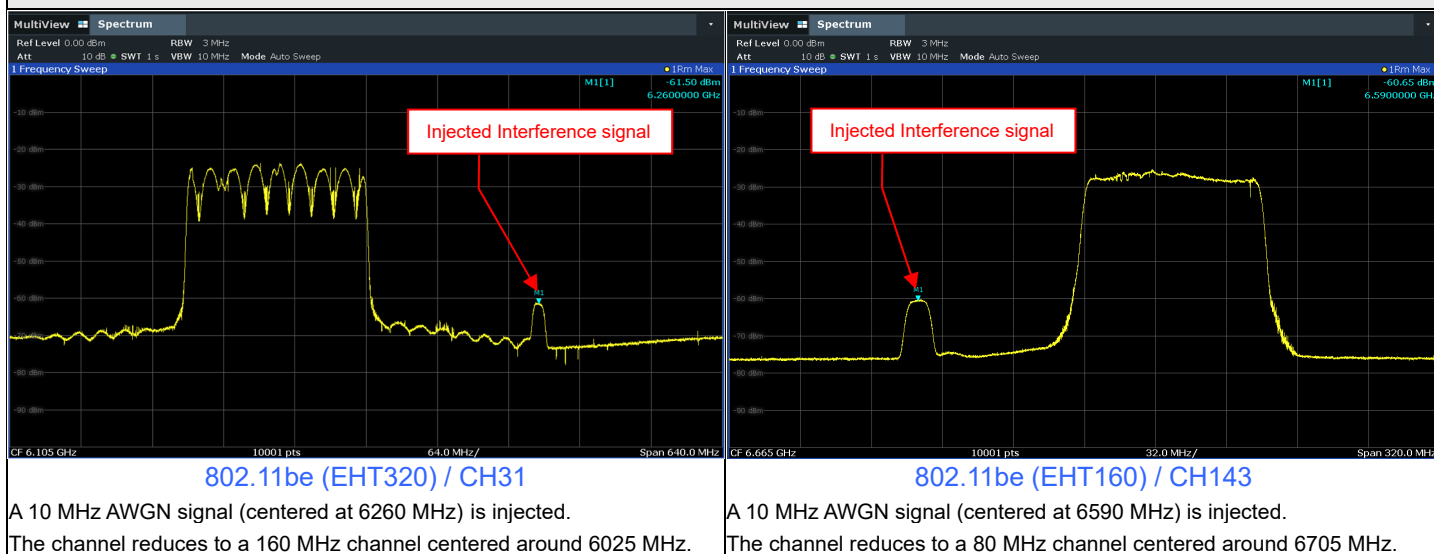

7.7 AC Power Conducted Emissions

Mode C


1TX

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Willy Lin		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.02	31.60	19.00	41.62	29.02	66.00	56.00	-24.38	-26.98
2	0.59141	10.04	27.80	18.63	37.84	28.67	56.00	46.00	-18.16	-17.33
3	2.52344	10.16	14.08	5.37	24.24	15.53	56.00	46.00	-31.76	-30.47
4	5.21875	10.36	9.32	0.05	19.68	10.41	60.00	50.00	-40.32	-39.59
5	15.66016	11.02	20.31	15.37	31.33	26.39	60.00	50.00	-28.67	-23.61
6	24.46094	11.47	38.97	33.91	50.44	45.38	60.00	50.00	-9.56	-4.62

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

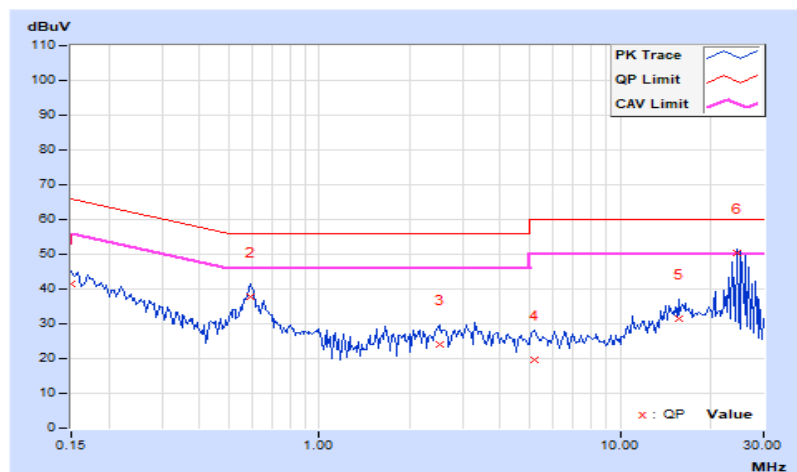


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Willy Lin		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	10.03	30.58	23.02	40.61	33.05	65.58	55.58	-24.97	-22.53
2	0.59141	10.04	33.42	25.28	43.46	35.32	56.00	46.00	-12.54	-10.68
3	1.65625	10.07	23.04	18.85	33.11	28.92	56.00	46.00	-22.89	-17.08
4	3.85547	10.21	20.35	14.29	30.56	24.50	56.00	46.00	-25.44	-21.50
5	14.64844	10.78	26.95	22.10	37.73	32.88	60.00	50.00	-22.27	-17.12
6	25.23828	11.12	39.47	22.48	50.59	33.60	60.00	50.00	-9.41	-16.40

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

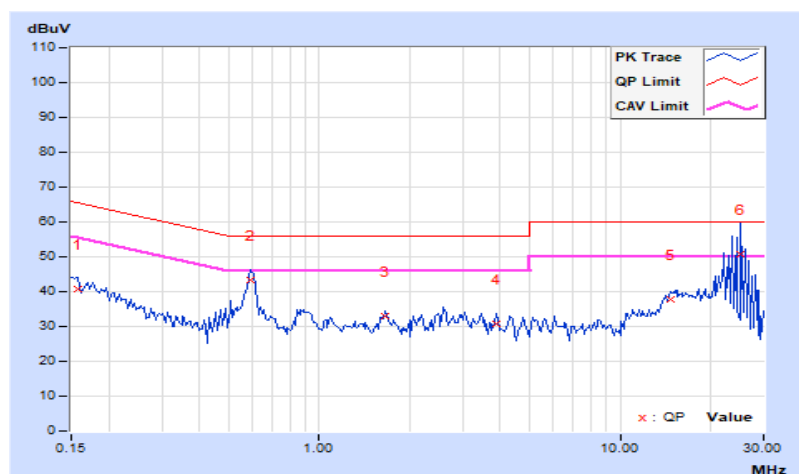


2TX

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 60 % RH
Tested By	Willy Lin		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	10.03	18.28	3.15	28.31	13.18	65.38	55.38	-37.07	-42.20
2	0.59531	10.04	15.11	0.26	25.15	10.30	56.00	46.00	-30.85	-35.70
3	0.97031	10.07	7.62	-7.28	17.69	2.79	56.00	46.00	-38.31	-43.21
4	3.27734	10.22	10.80	1.66	21.02	11.88	56.00	46.00	-34.98	-34.12
5	16.05078	11.04	14.65	8.17	25.69	19.21	60.00	50.00	-34.31	-30.79
6	26.02734	11.55	24.37	15.14	35.92	26.69	60.00	50.00	-24.08	-23.31

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

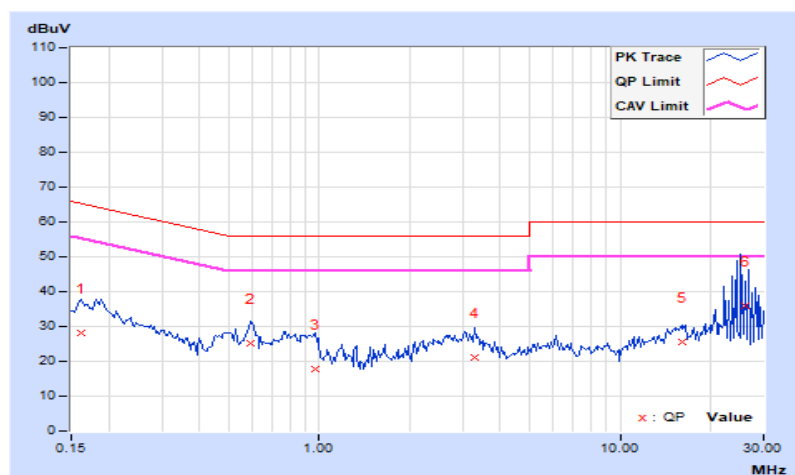


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 60 % RH
Tested By	Willy Lin		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.21250	10.03	25.45	10.96	35.48	20.99	63.11	53.11	-27.63	-32.12
2	0.59141	10.04	18.51	6.05	28.55	16.09	56.00	46.00	-27.45	-29.91
3	0.97422	10.05	16.96	6.03	27.01	16.08	56.00	46.00	-28.99	-29.92
4	3.58203	10.19	18.66	10.06	28.85	20.25	56.00	46.00	-27.15	-25.75
5	9.85547	10.57	15.86	1.60	26.43	12.17	60.00	50.00	-33.57	-37.83
6	27.52344	11.18	34.98	28.72	46.16	39.90	60.00	50.00	-13.84	-10.10

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

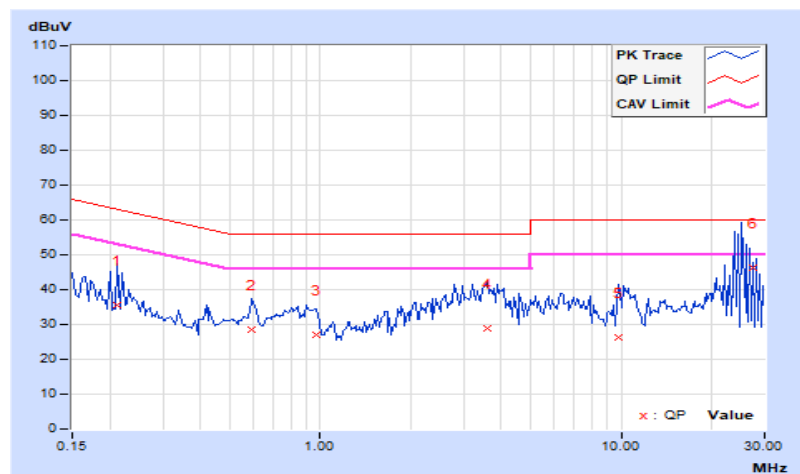

7.8 Unwanted Emissions below 1 GHz

Mode A


1TX

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	30 MHz ~ 1 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	68.92	23.89 PK	40	-16.11	-81.23	9.86	-71.37
2	120.94	23.58 PK	43.5	-19.92	-81.54	9.86	-71.68
3	309.48	24.41 PK	46	-21.59	-80.71	9.86	-70.85
4	570.29	24.87 PK	46	-21.13	-80.25	9.86	-70.39
5	768.65	25.17 PK	46	-20.83	-79.95	9.86	-70.09
6	832.43	25.81 PK	46	-20.19	-79.31	9.86	-69.45

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

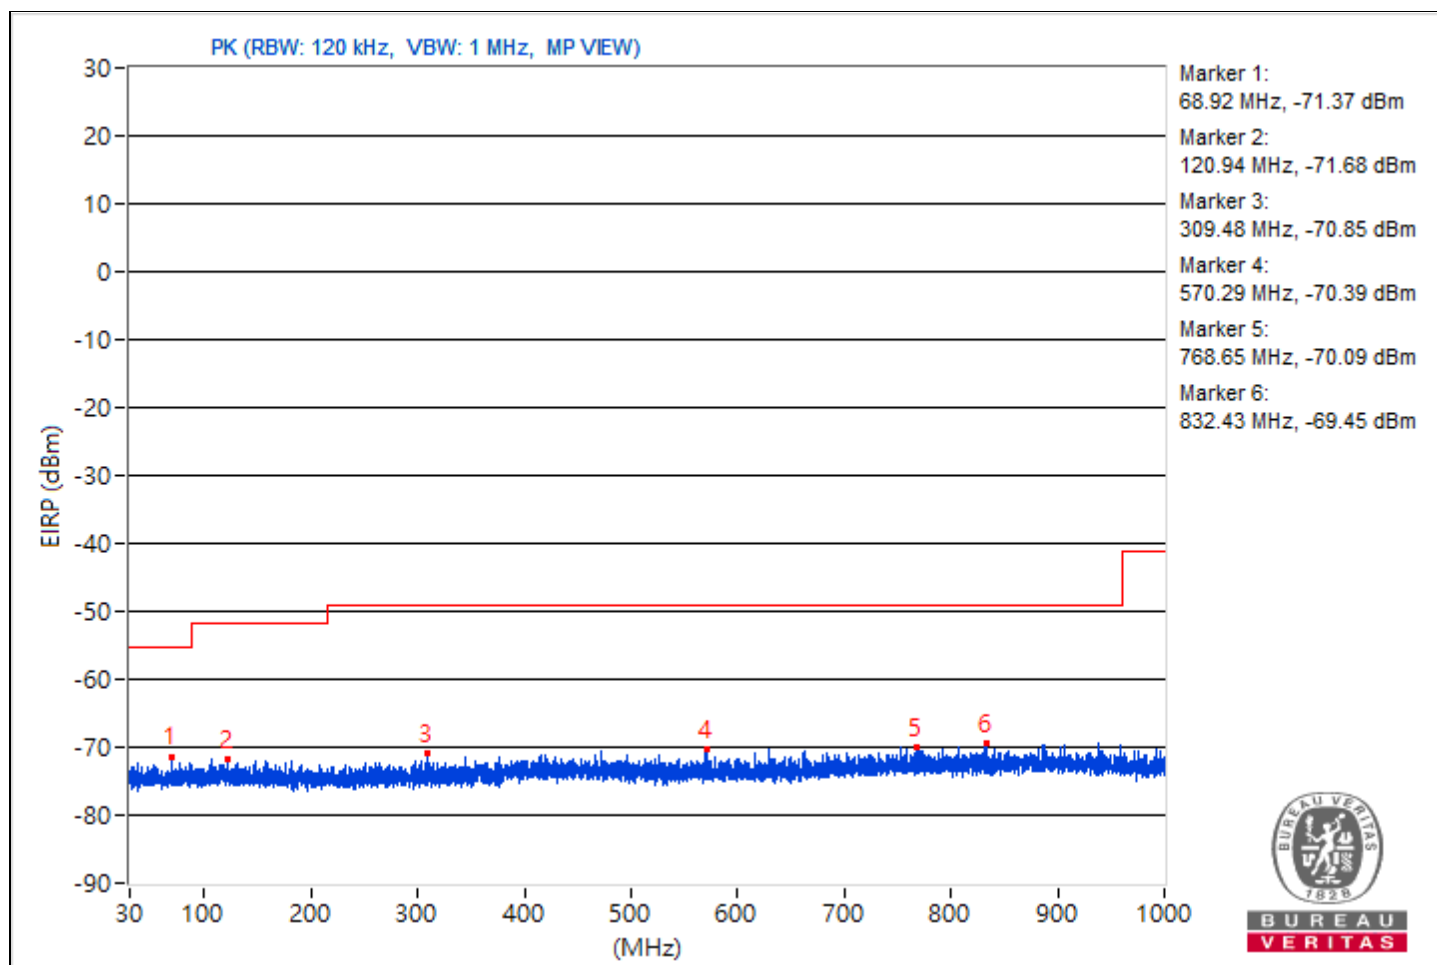


2TX

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	79.47	29.31 PK	40	-10.69	-80.77	-83.22	12.87	-65.95
2	101.42	29.06 PK	43.5	-14.44	-80.89	-83.72	12.87	-66.2
3	397.99	29.1 PK	46	-16.9	-80.94	-83.52	12.87	-66.16
4	440.8	30.19 PK	46	-15.81	-81.65	-80.34	12.87	-65.07
5	776.9	31.07 PK	46	-14.93	-83.1	-78.3	12.87	-64.19
6	807.82	30.83 PK	46	-15.17	-82.16	-79.01	12.87	-64.43

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

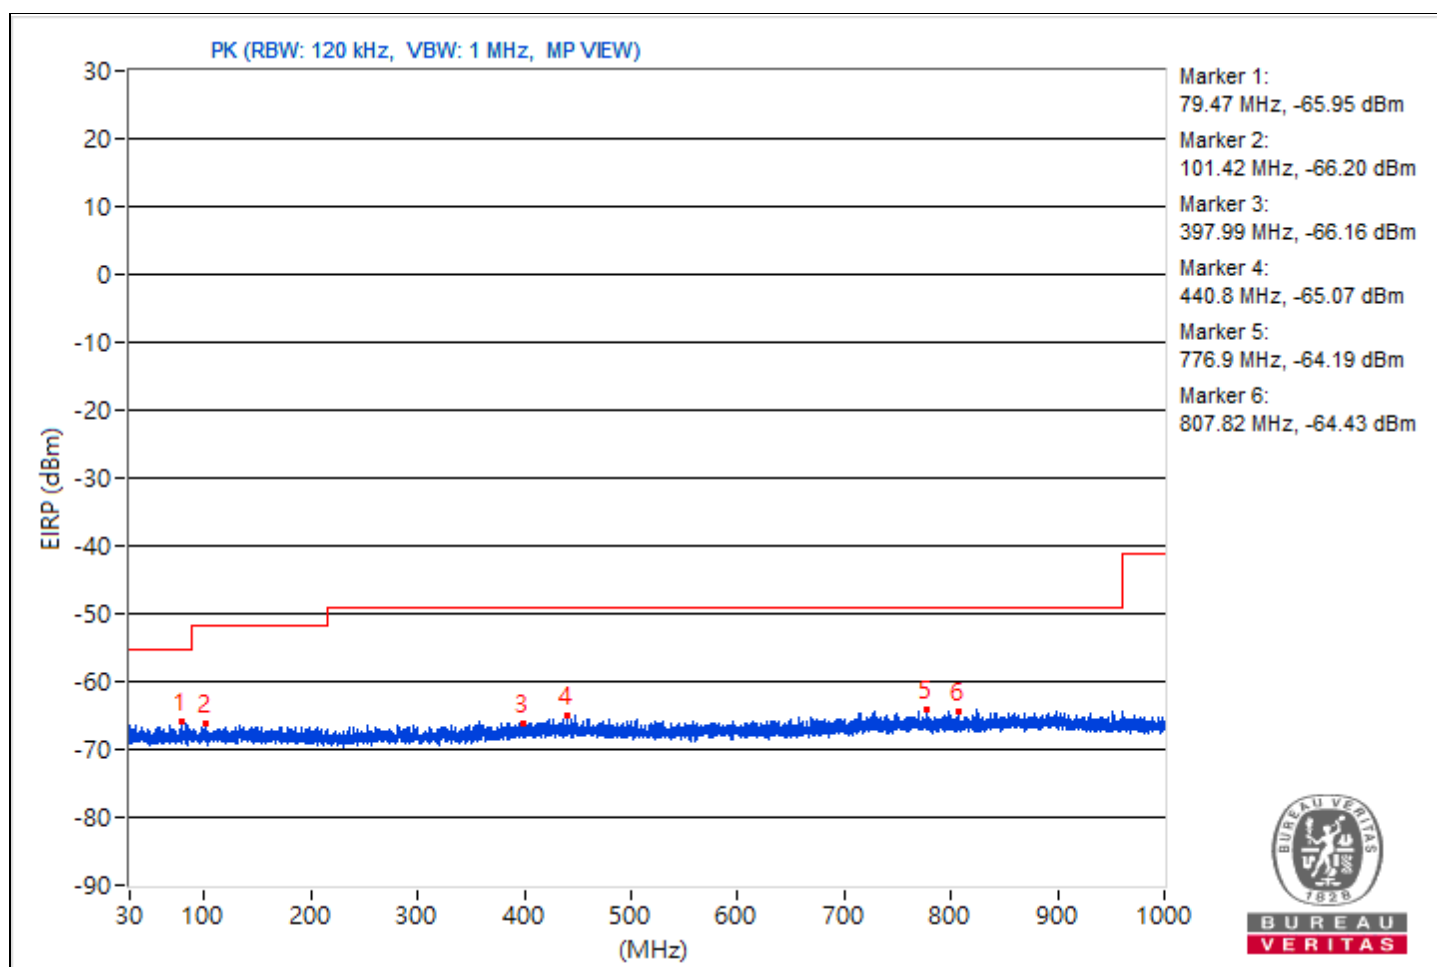

Mode B


1TX

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 61 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.30	36.0 QP	40.0	-4.0	1.50 H	76	53.9	-17.9
2	118.22	39.1 QP	43.5	-4.4	2.00 H	281	59.0	-19.9
3	232.22	36.6 QP	46.0	-9.4	1.00 H	159	56.5	-19.9
4	303.05	41.9 QP	46.0	-4.1	1.50 H	265	58.7	-16.8
5	460.19	30.5 QP	46.0	-15.5	3.00 H	118	43.1	-12.6
6	498.48	37.9 QP	46.0	-8.1	1.00 H	266	49.9	-12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

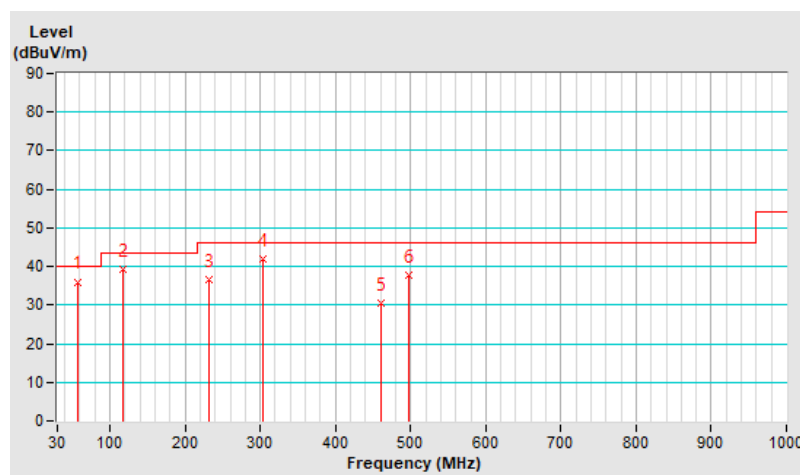


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 61 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.73	34.6 QP	40.0	-5.4	1.50 V	200	52.0	-17.4
2	105.41	36.7 QP	43.5	-6.8	1.00 V	340	58.0	-21.3
3	206.82	34.7 QP	43.5	-8.8	1.00 V	180	55.7	-21.0
4	301.00	39.1 QP	46.0	-6.9	2.00 V	165	55.9	-16.8
5	434.06	30.9 QP	46.0	-15.1	1.50 V	145	44.2	-13.3
6	520.31	39.3 QP	46.0	-6.7	1.00 V	211	50.8	-11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

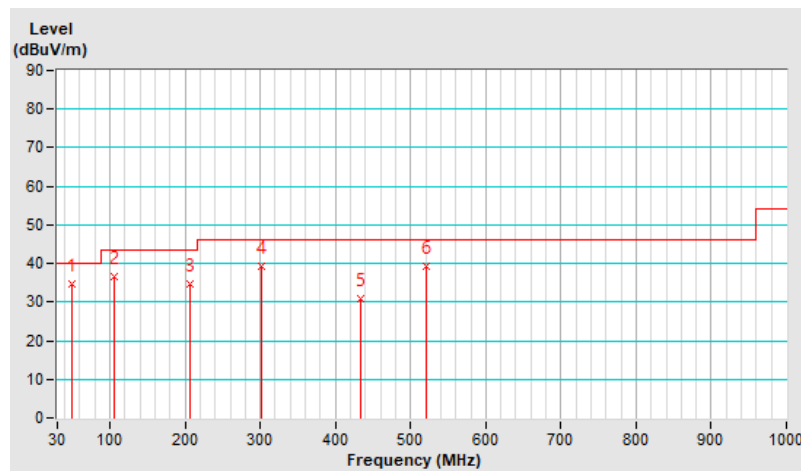


2TX

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 61 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	56.96	35.8 QP	40.0	-4.2	1.50 H	70	53.7	-17.9
2	118.31	39.0 QP	43.5	-4.5	1.50 H	274	58.9	-19.9
3	231.45	36.5 QP	46.0	-9.5	2.00 H	147	56.5	-20.0
4	303.81	42.3 QP	46.0	-3.7	1.00 H	267	59.1	-16.8
5	460.07	31.1 QP	46.0	-14.9	3.00 H	111	43.7	-12.6
6	499.09	38.4 QP	46.0	-7.6	1.00 H	275	50.4	-12.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

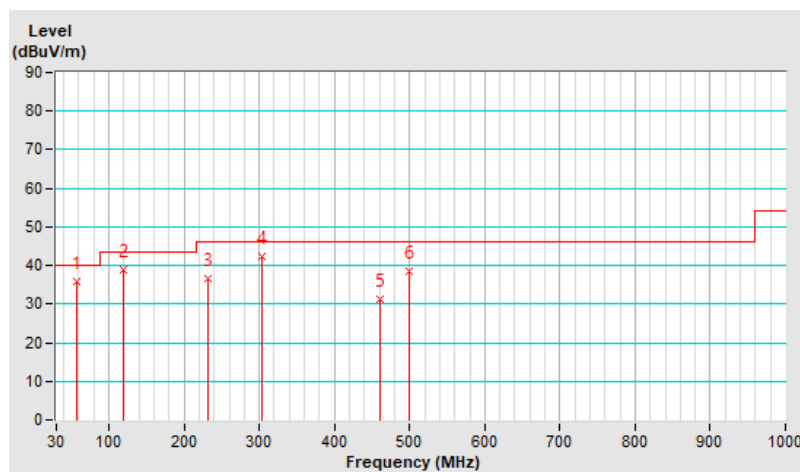


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 61 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.91	34.7 QP	40.0	-5.3	1.50 V	194	52.1	-17.4
2	105.18	36.9 QP	43.5	-6.6	2.00 V	335	58.2	-21.3
3	206.88	34.6 QP	43.5	-8.9	1.00 V	181	55.6	-21.0
4	301.15	38.7 QP	46.0	-7.3	2.00 V	168	55.5	-16.8
5	433.84	30.9 QP	46.0	-15.1	1.50 V	156	44.2	-13.3
6	520.41	39.7 QP	46.0	-6.3	1.00 V	224	51.2	-11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

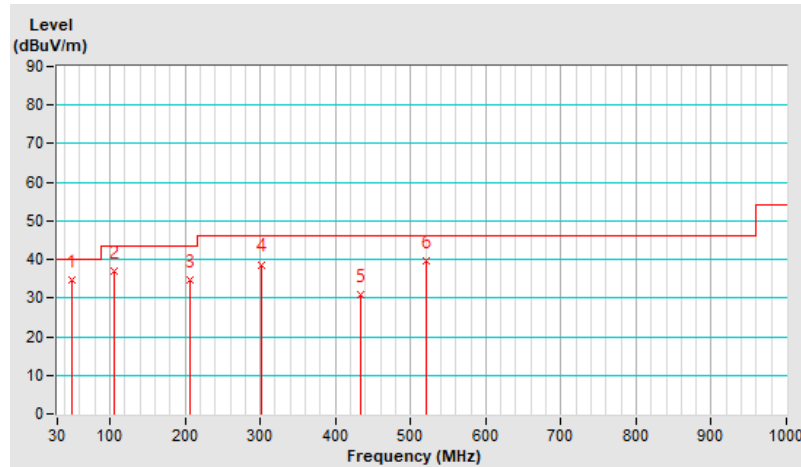

7.9 Unwanted Emissions above 1 GHz

Mode A



1TX

Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5107.91	49.86 PK	74	-24.14	-50.56	5.16	-45.4
2	5107.91	29.67 AV	54	-24.33	-70.75	5.16	-65.59
3	7279.23	48.79 PK	74	-25.21	-51.63	5.16	-46.47
4	7279.23	29.07 AV	54	-24.93	-71.35	5.16	-66.19
5	21377.9	52.47 PK	74	-21.53	-47.95	5.16	-42.79
6	21377.9	30.38 AV	54	-23.62	-70.04	5.16	-64.88
7	23929.3	51.32 PK	74	-22.68	-49.1	5.16	-43.94
8	23929.3	32.24 AV	54	-21.76	-68.18	5.16	-63.02
9	39619.02	34.09 PK	74	-39.91	-66.33	5.16	-61.17
10	39619.02	26.83 AV	54	-27.17	-73.59	5.16	-68.43


Note: Margin value = Emission Level - Limit value

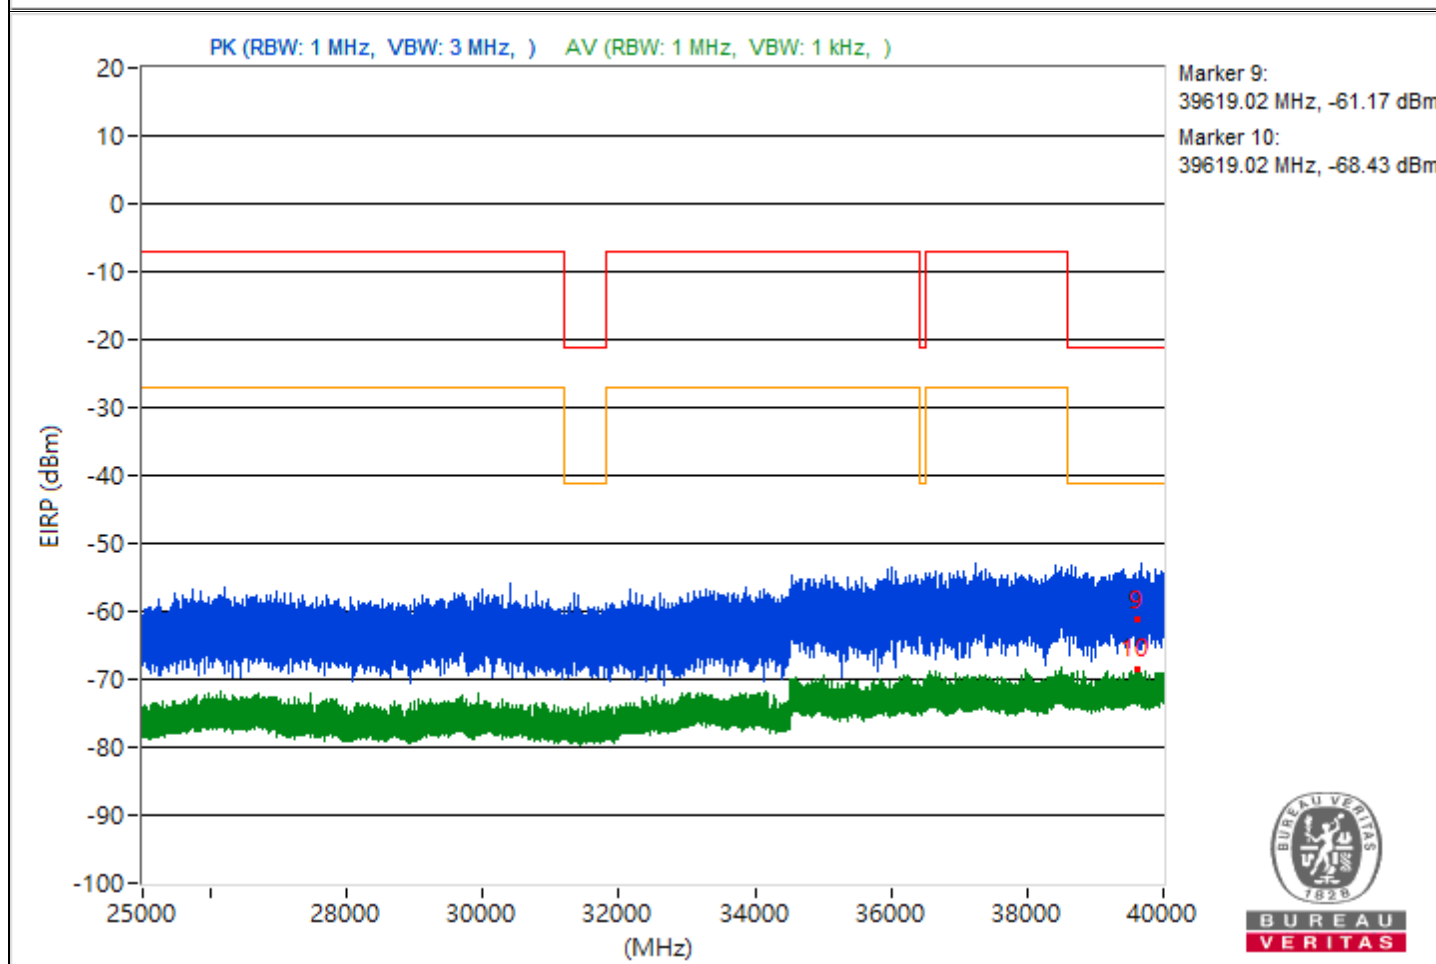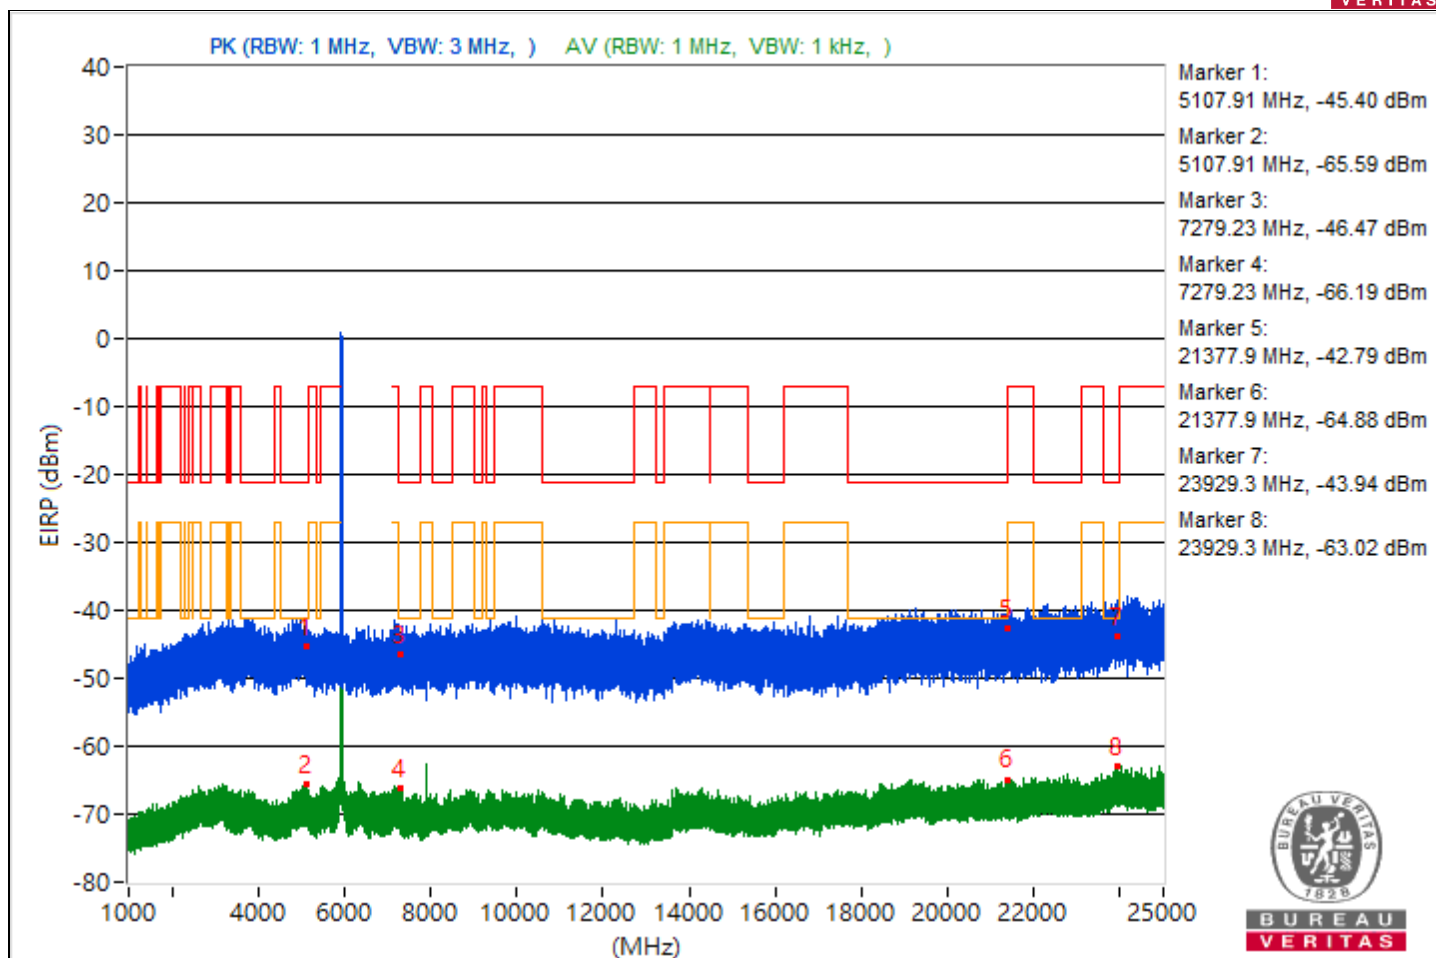


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4901.49	49.37 PK	74	-24.63	-51.05	5.16	-45.89
2	4901.49	29.93 AV	54	-24.07	-70.49	5.16	-65.33
3	9374.49	49.33 PK	74	-24.67	-51.09	5.16	-45.93
4	9374.49	28.65 AV	54	-25.35	-71.77	5.16	-66.61
5	19805.3	47.45 PK	74	-26.55	-52.97	5.16	-47.81
6	19805.3	30.77 AV	54	-23.23	-69.65	5.16	-64.49
7	23954.6	51.55 PK	74	-22.45	-48.87	5.16	-43.71
8	23954.6	32.52 AV	54	-21.48	-67.9	5.16	-62.74
9	39198.31	33.35 PK	74	-40.65	-67.07	5.16	-61.91
10	39198.31	26.96 AV	54	-27.04	-73.46	5.16	-68.3

Note: Margin value = Emission Level - Limit value

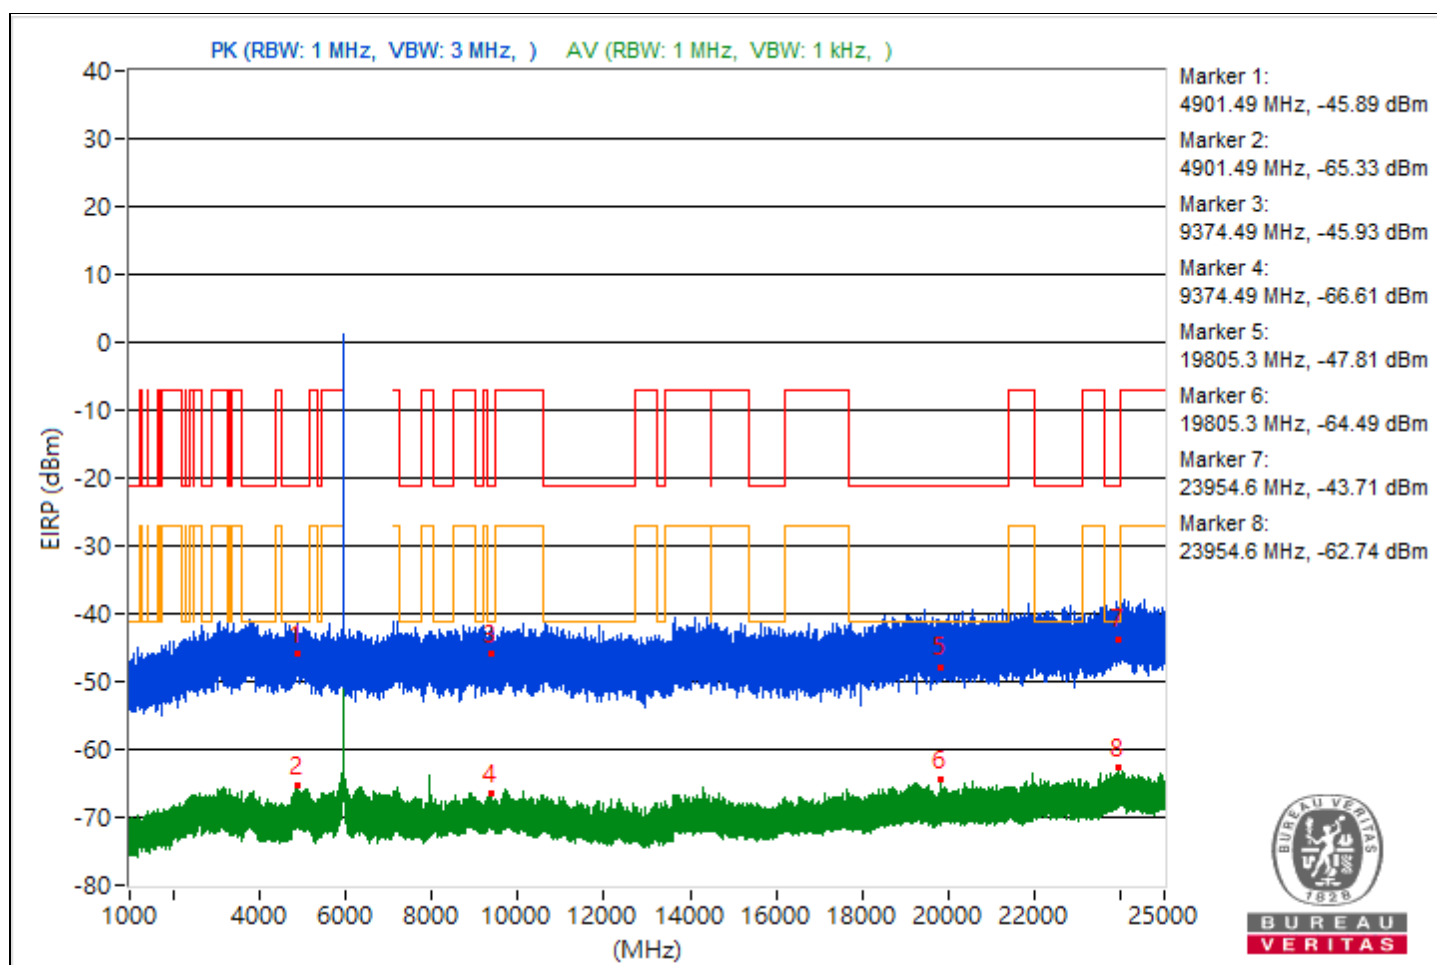


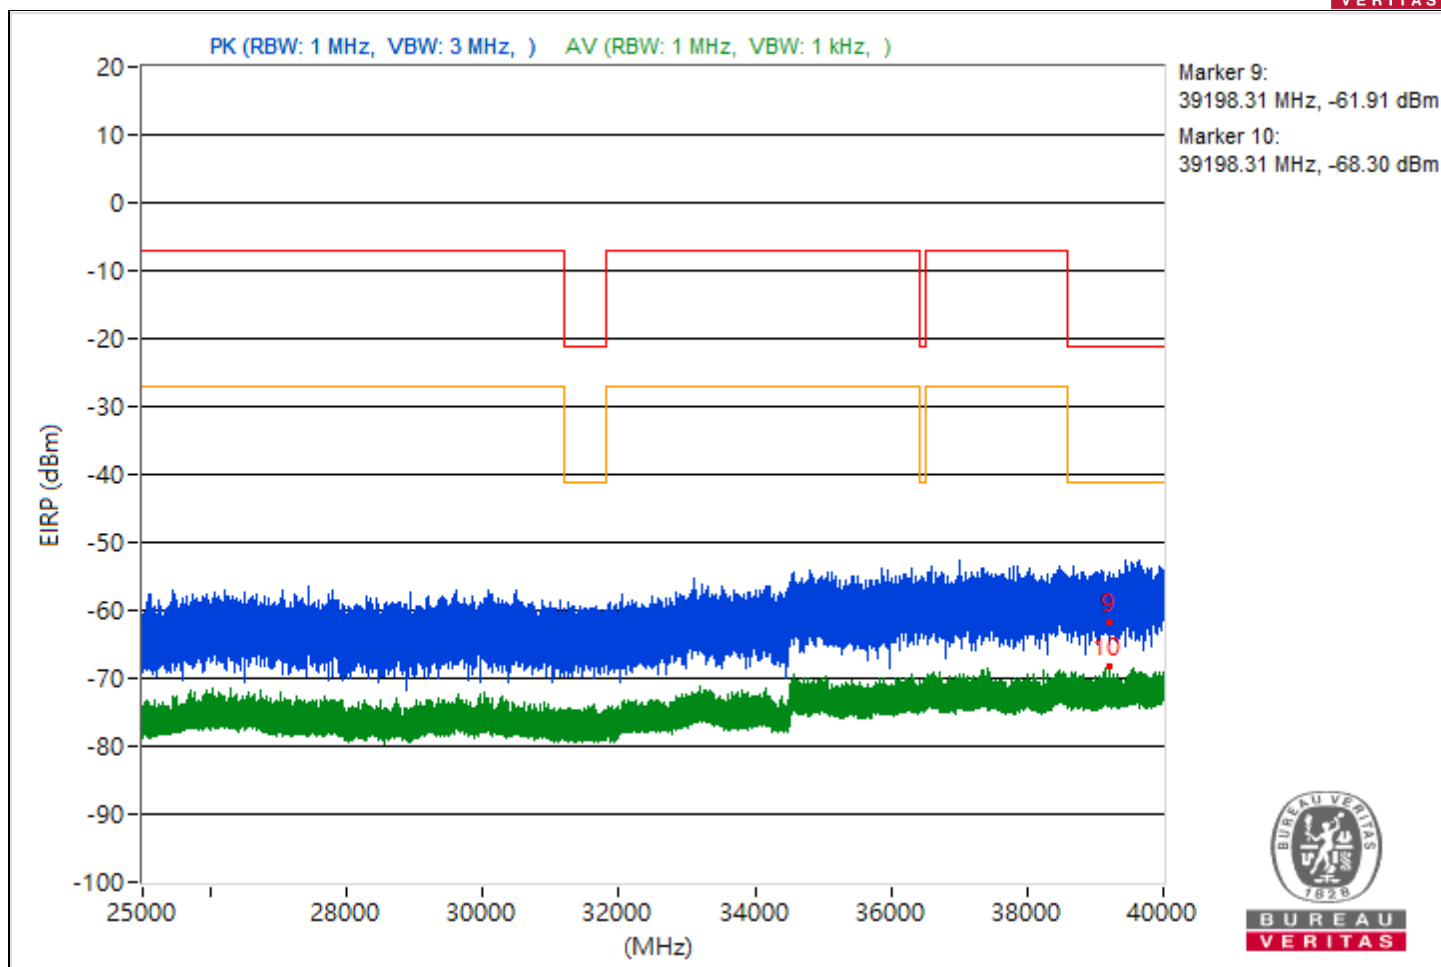


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5117.4	49.71 PK	74	-24.29	-50.71	5.16	-45.55
2	5117.4	30.46 AV	54	-23.54	-69.96	5.16	-64.8
3	7322.24	48.99 PK	74	-25.01	-51.43	5.16	-46.27
4	7322.24	29.37 AV	54	-24.63	-71.05	5.16	-65.89
5	19447.8	50.61 PK	74	-23.39	-49.81	5.16	-44.65
6	19447.8	30.37 AV	54	-23.63	-70.05	5.16	-64.89
7	23835.6	49.81 PK	74	-24.19	-50.61	5.16	-45.45
8	23835.6	33.15 AV	54	-20.85	-67.27	5.16	-62.11
9	39387.11	40.06 PK	74	-33.94	-60.36	5.16	-55.2
10	39387.11	27.33 AV	54	-26.67	-73.09	5.16	-67.93

Note: Margin value = Emission Level - Limit value

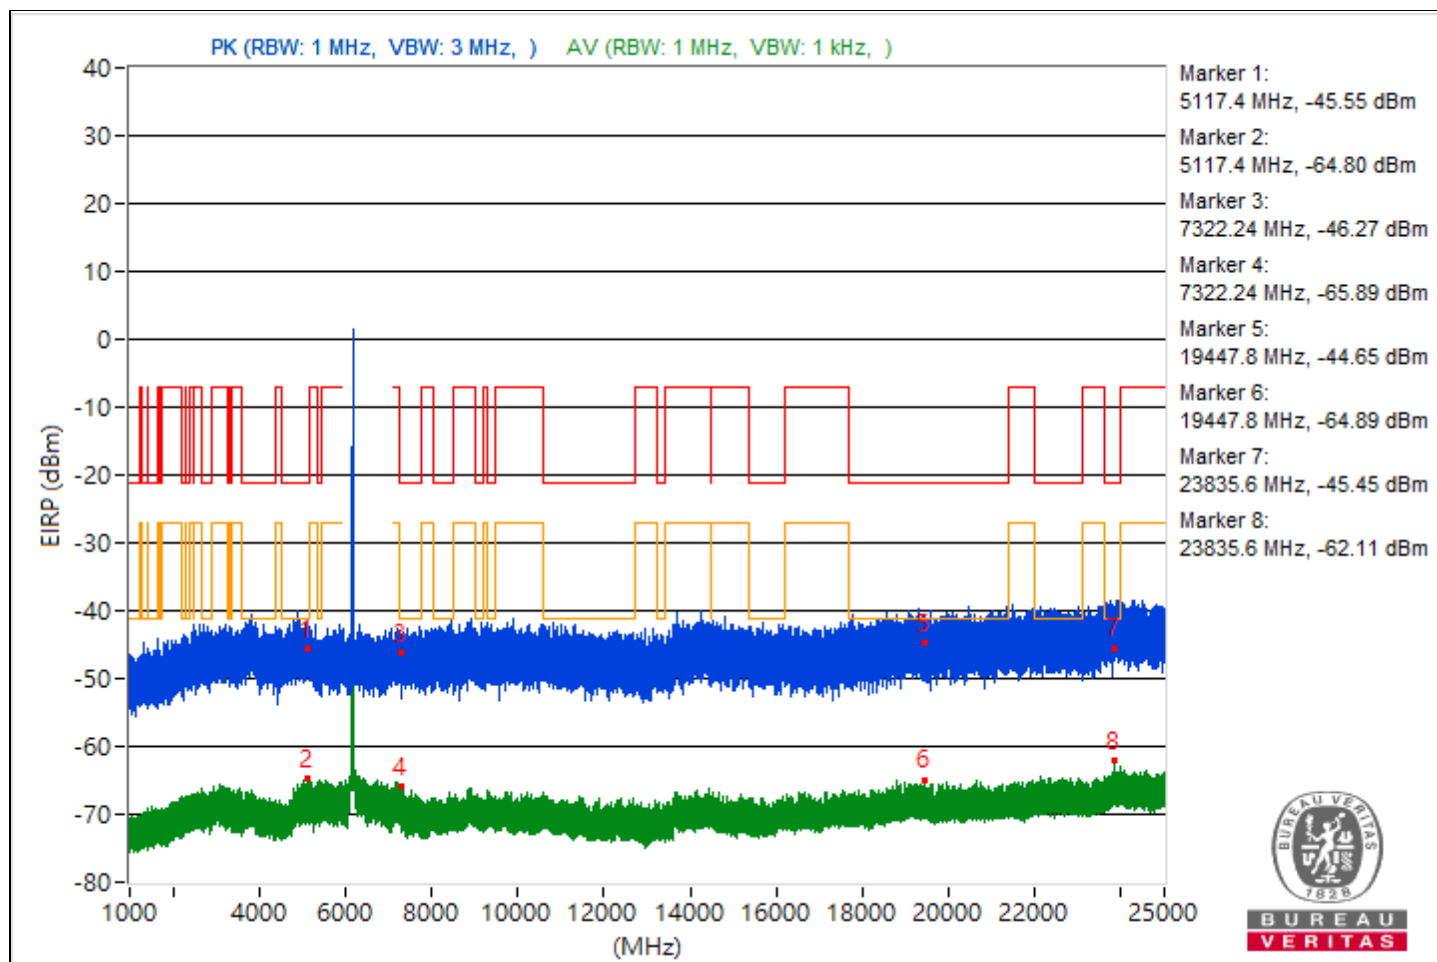


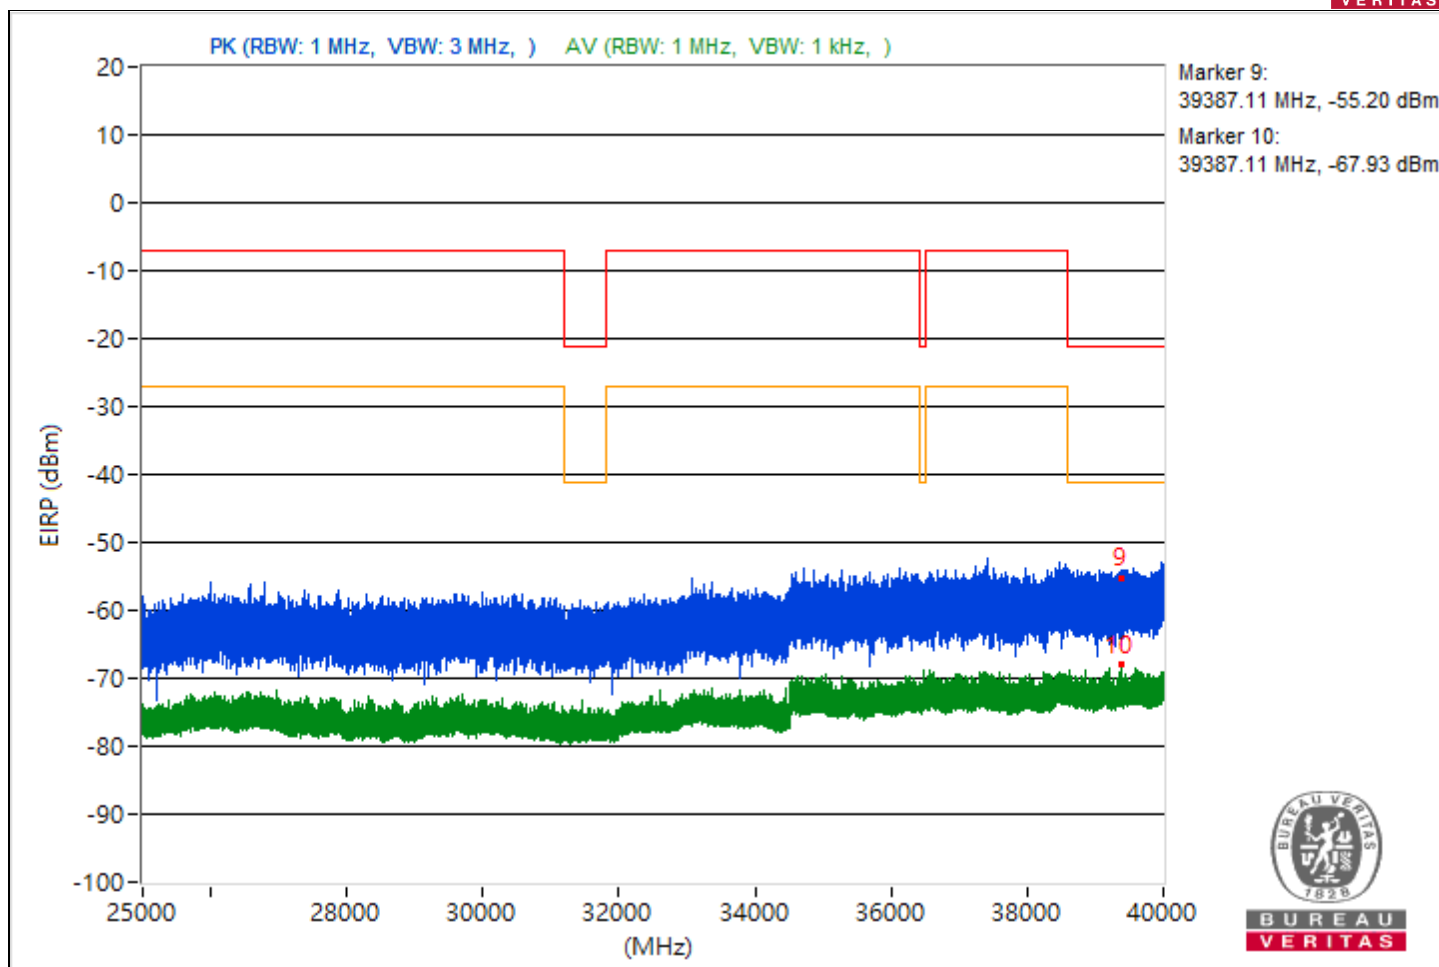


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5123.08	48.96 PK	74	-25.04	-51.46	5.16	-46.3
2	5123.08	30.45 AV	54	-23.55	-69.97	5.16	-64.81
3	10612	49.57 PK	74	-24.43	-50.85	5.16	-45.69
4	10612	29.09 AV	54	-24.91	-71.33	5.16	-66.17
5	19221.7	53 PK	74	-21	-47.42	5.16	-42.26
6	19221.7	30.93 AV	54	-23.07	-69.49	5.16	-64.33
7	23943.3	52.07 PK	74	-21.93	-48.35	5.16	-43.19
8	23943.3	32 AV	54	-22	-68.42	5.16	-63.26
9	39592.89	36.14 PK	74	-37.86	-64.28	5.16	-59.12
10	39592.89	27.12 AV	54	-26.88	-73.3	5.16	-68.14

Note: Margin value = Emission Level - Limit value

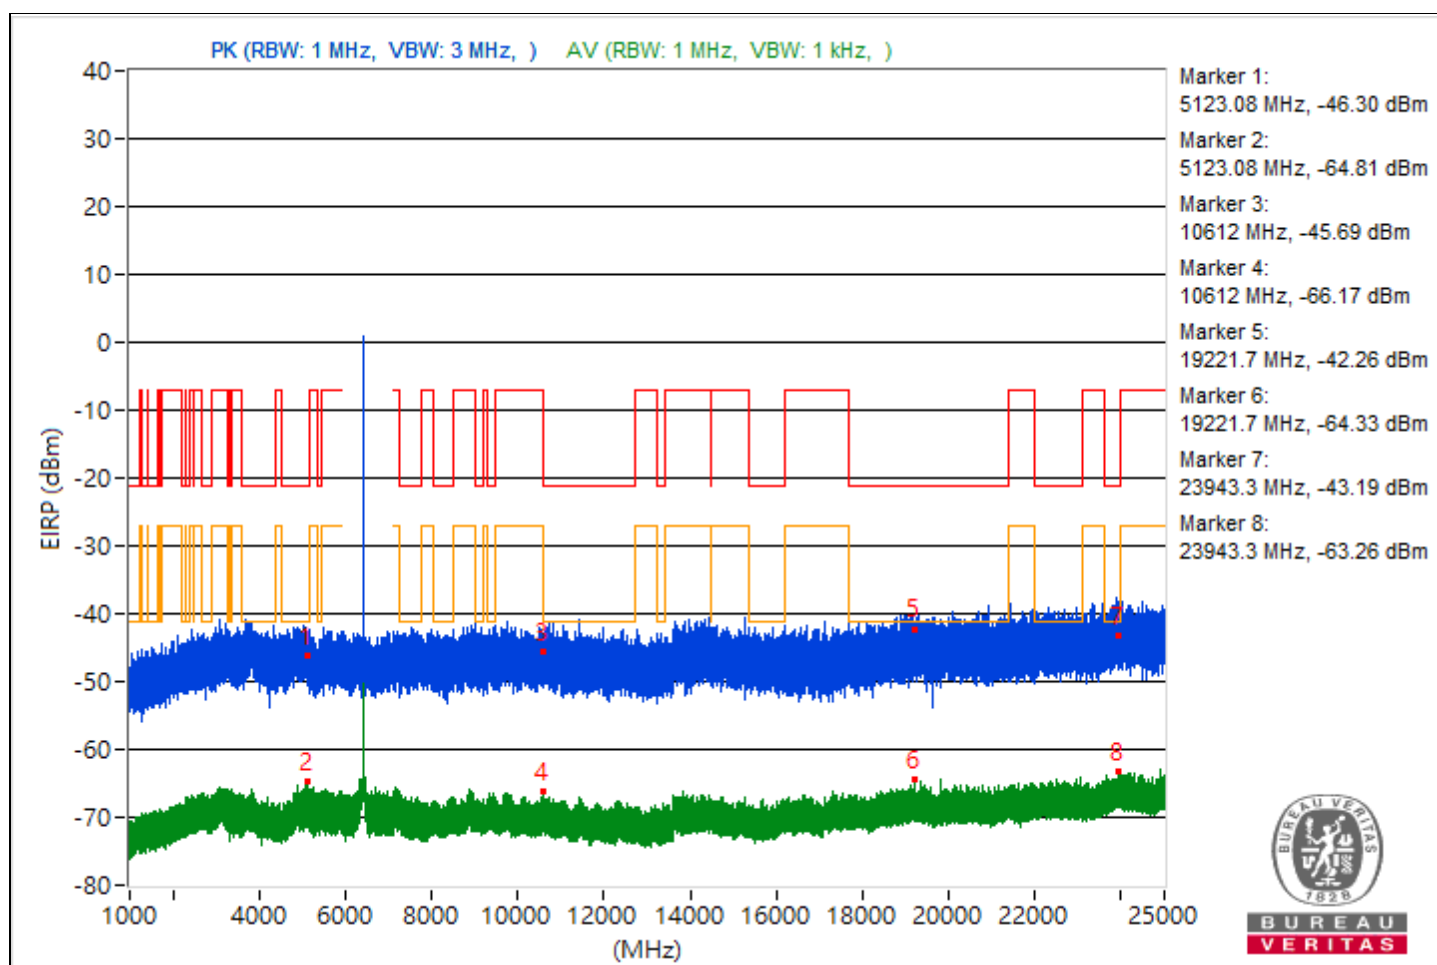


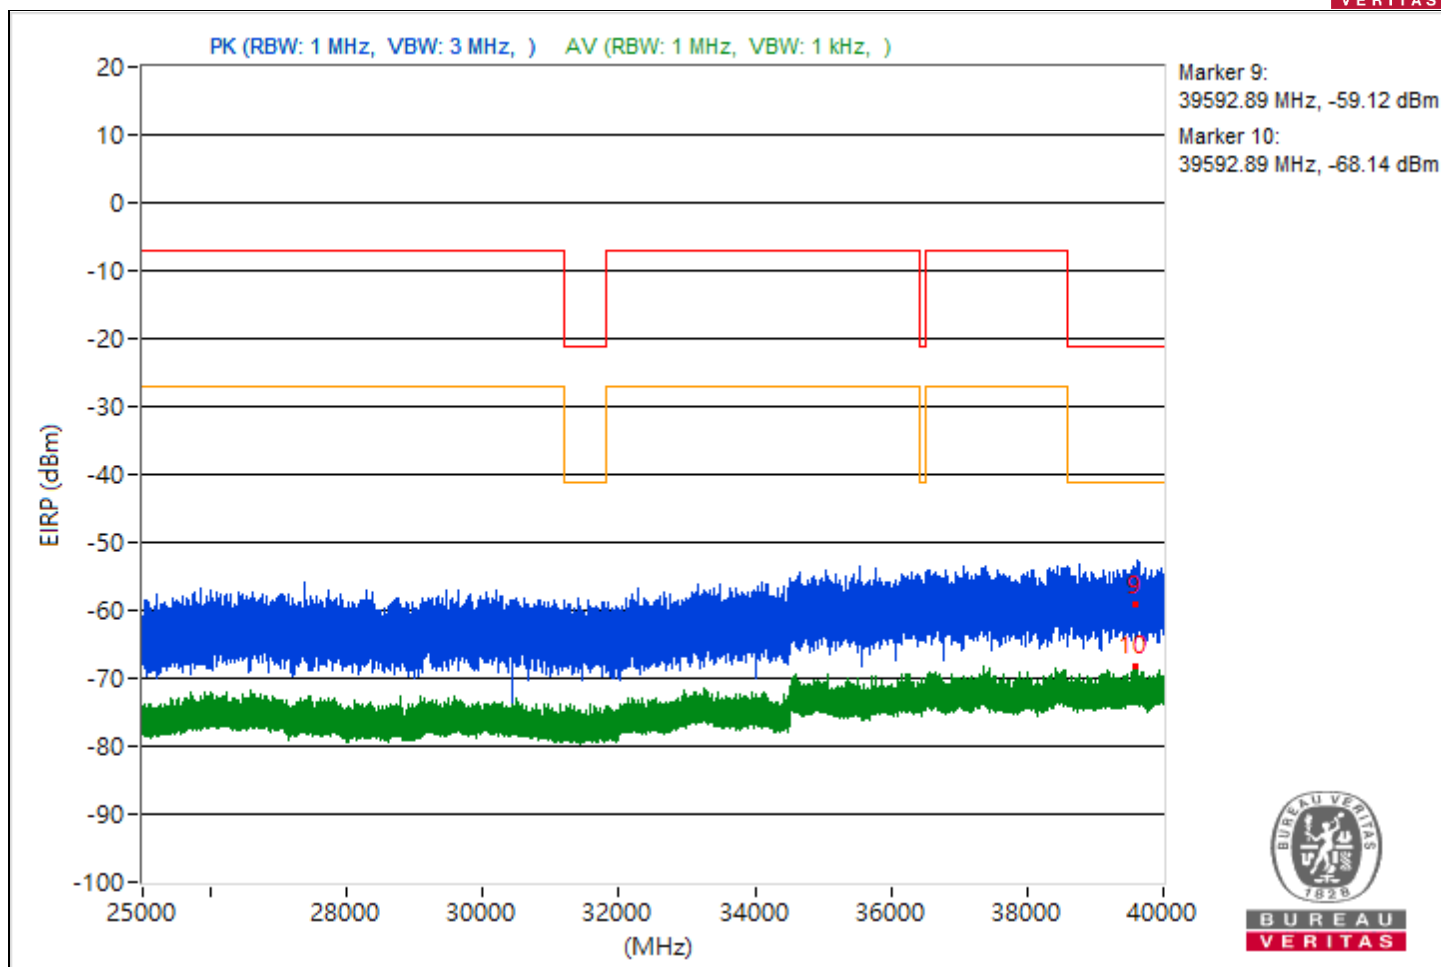


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5055.57	48.26 PK	74	-25.74	-52.16	5.16	-47
2	5055.57	30.48 AV	54	-23.52	-69.94	5.16	-64.78
3	7261.34	47.78 PK	74	-26.22	-52.64	5.16	-47.48
4	7261.34	29.27 AV	54	-24.73	-71.15	5.16	-65.99
5	19338.9	49.42 PK	74	-24.58	-51	5.16	-45.84
6	19338.9	30.49 AV	54	-23.51	-69.93	5.16	-64.77
7	23973.7	52.73 PK	74	-21.27	-47.69	5.16	-42.53
8	23973.7	32.67 AV	54	-21.33	-67.75	5.16	-62.59
9	39995.2	39.47 PK	74	-34.53	-60.95	5.16	-55.79
10	39995.2	26.96 AV	54	-27.04	-73.46	5.16	-68.3

Note: Margin value = Emission Level - Limit value

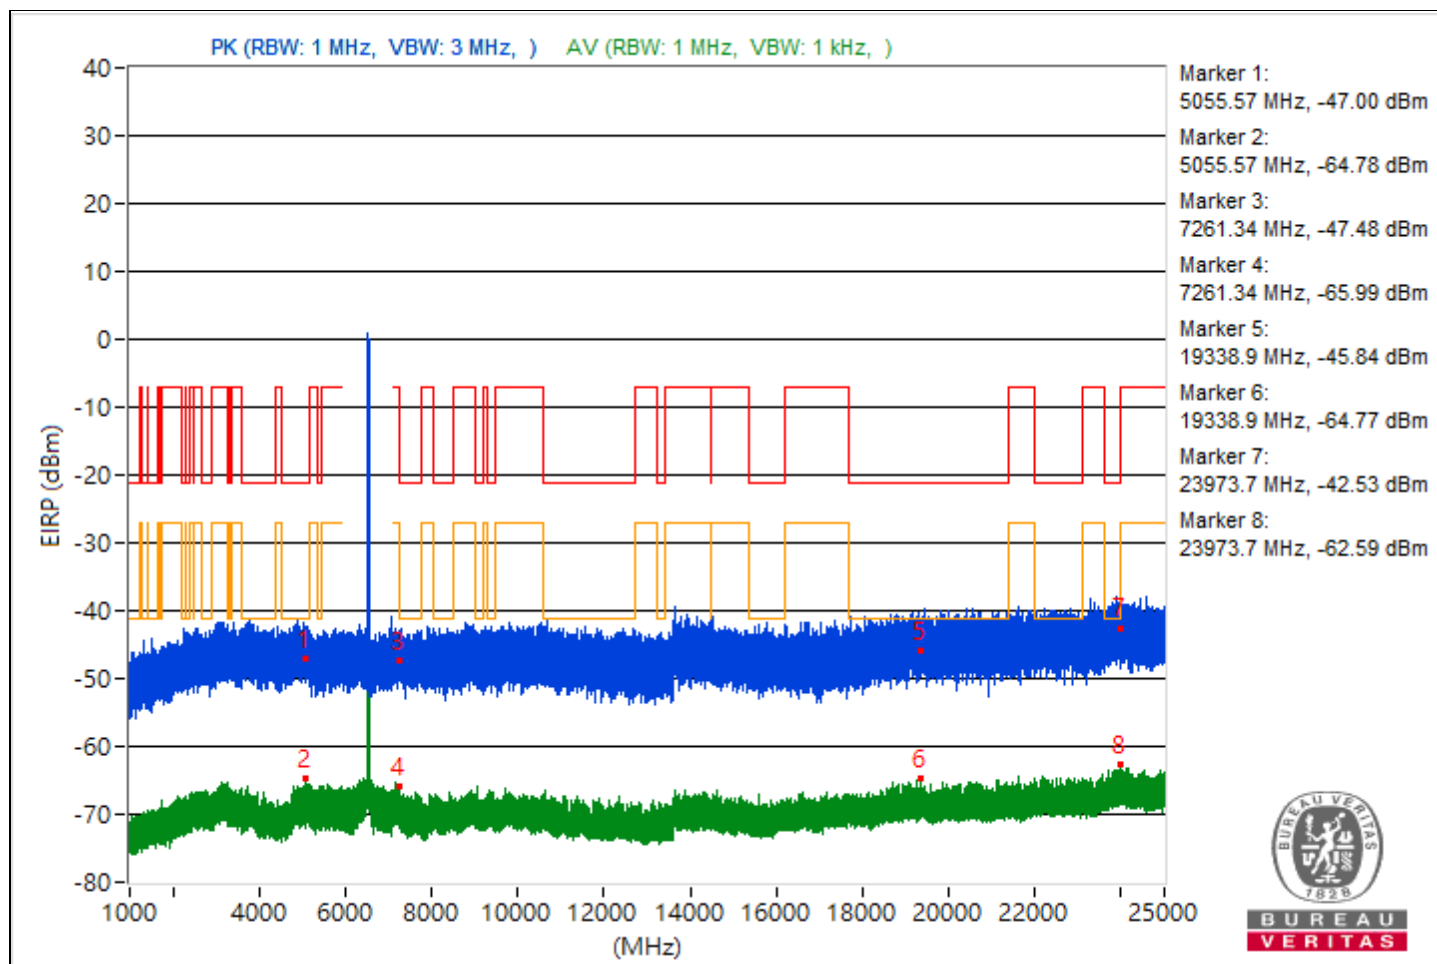


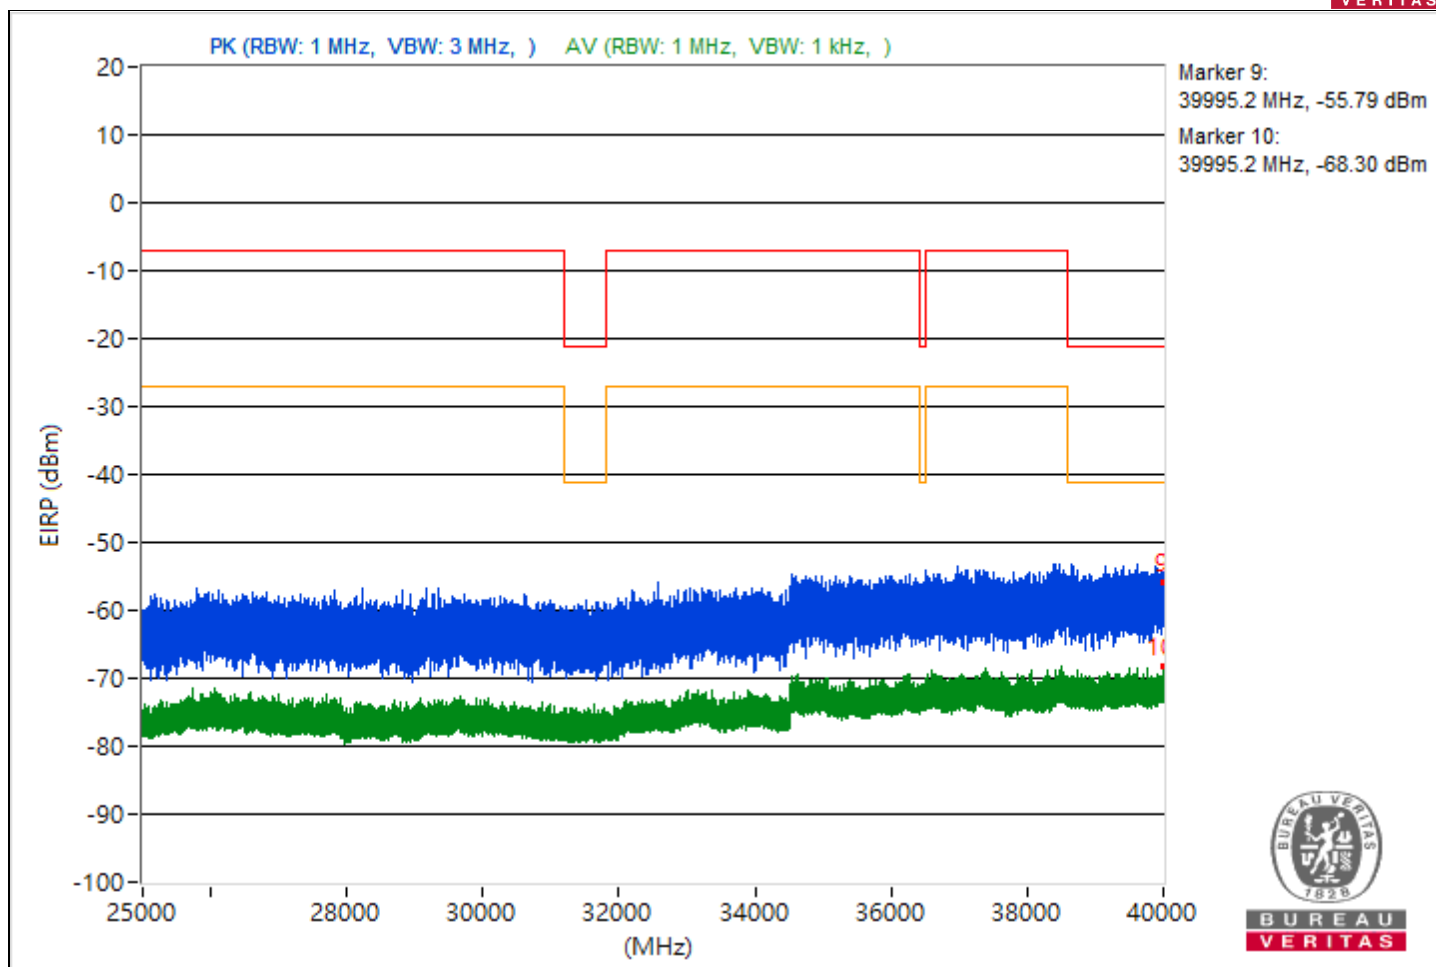


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5054.48	49.15 PK	74	-24.85	-51.27	5.16	-46.11
2	5054.48	30.01 AV	54	-23.99	-70.41	5.16	-65.25
3	9370.76	48.26 PK	74	-25.74	-52.16	5.16	-47
4	9370.76	29.1 AV	54	-24.9	-71.32	5.16	-66.16
5	20689	48.88 PK	74	-25.12	-51.54	5.16	-46.38
6	20689	31.01 AV	54	-22.99	-69.41	5.16	-64.25
7	23897.2	54.75 PK	74	-19.25	-45.67	5.16	-40.51
8	23897.2	31.83 AV	54	-22.17	-68.59	5.16	-63.43
9	39578.13	35.61 PK	74	-38.39	-64.81	5.16	-59.65
10	39578.13	27.3 AV	54	-26.7	-73.12	5.16	-67.96

Note: Margin value = Emission Level - Limit value

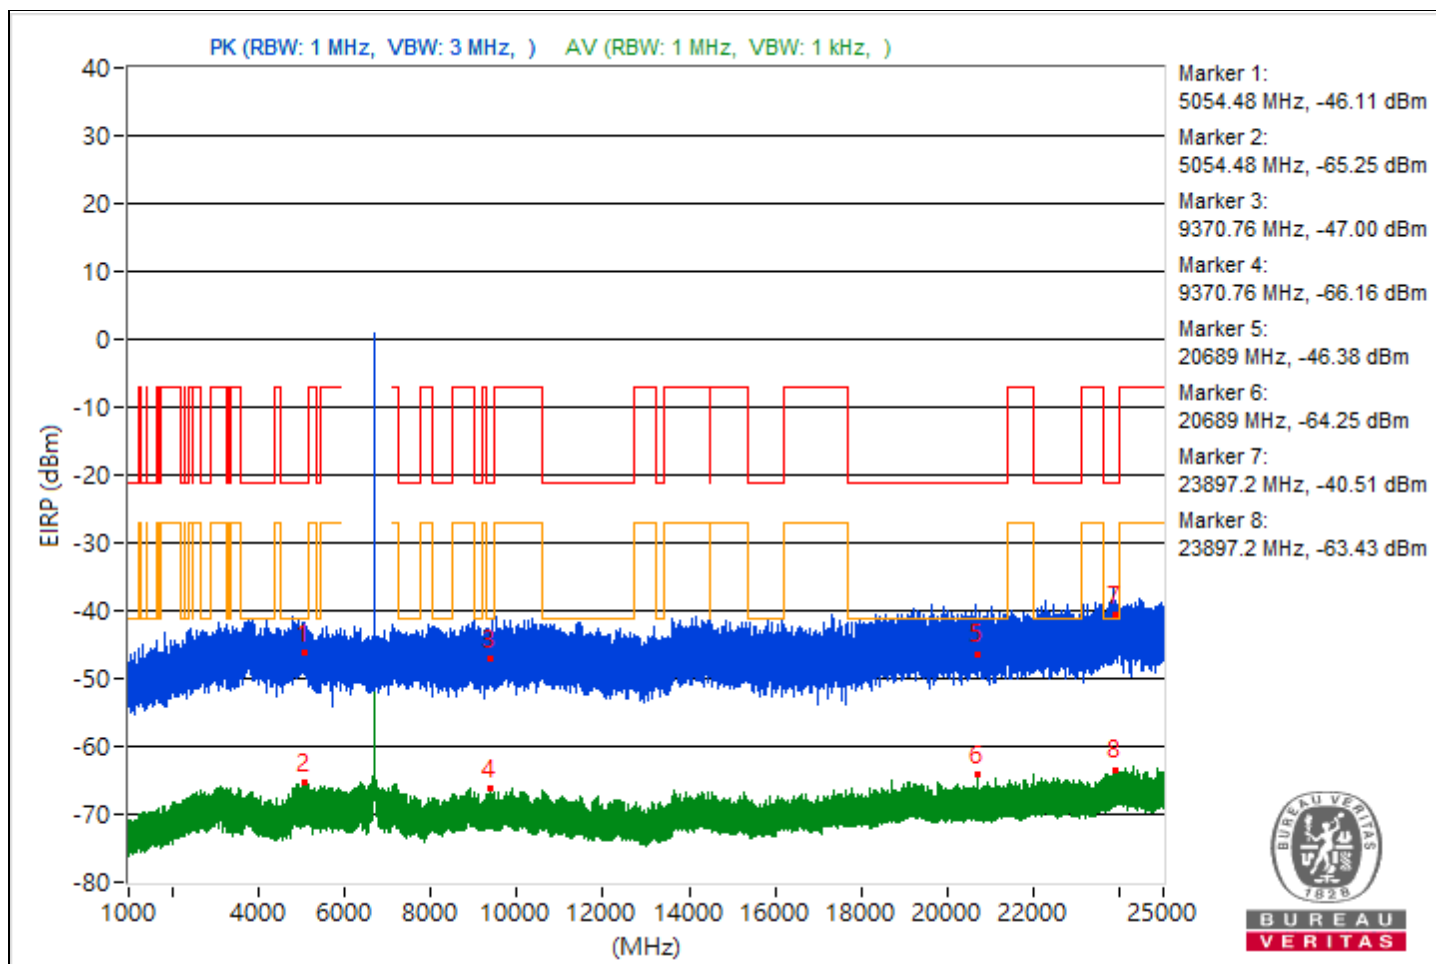


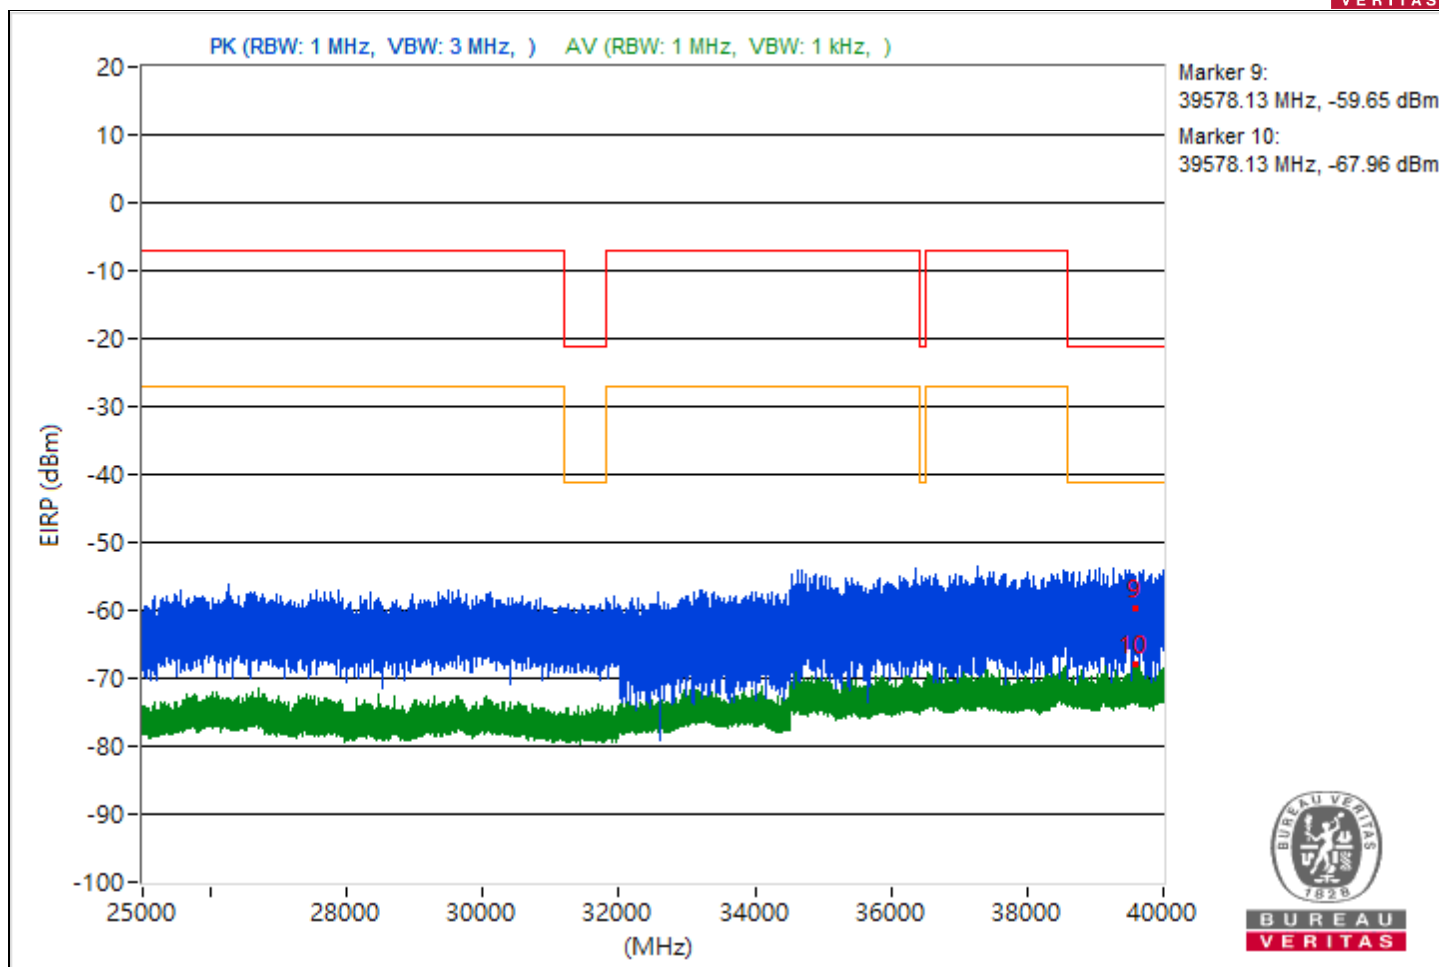


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4892.86	52.12 PK	74	-21.88	-48.3	5.16	-43.14
2	4892.86	30.4 AV	54	-23.6	-70.02	5.16	-64.86
3	9396.09	48.39 PK	74	-25.61	-52.03	5.16	-46.87
4	9396.09	29.3 AV	54	-24.7	-71.12	5.16	-65.96
5	19293.7	48.44 PK	74	-25.56	-51.98	5.16	-46.82
6	19293.7	30.14 AV	54	-23.86	-70.28	5.16	-65.12
7	23962.6	53.21 PK	74	-20.79	-47.21	5.16	-42.05
8	23962.6	31.68 AV	54	-22.32	-68.74	5.16	-63.58
9	39571.11	35.87 PK	74	-38.13	-64.55	5.16	-59.39
10	39571.11	26.73 AV	54	-27.27	-73.69	5.16	-68.53

Note: Margin value = Emission Level - Limit value

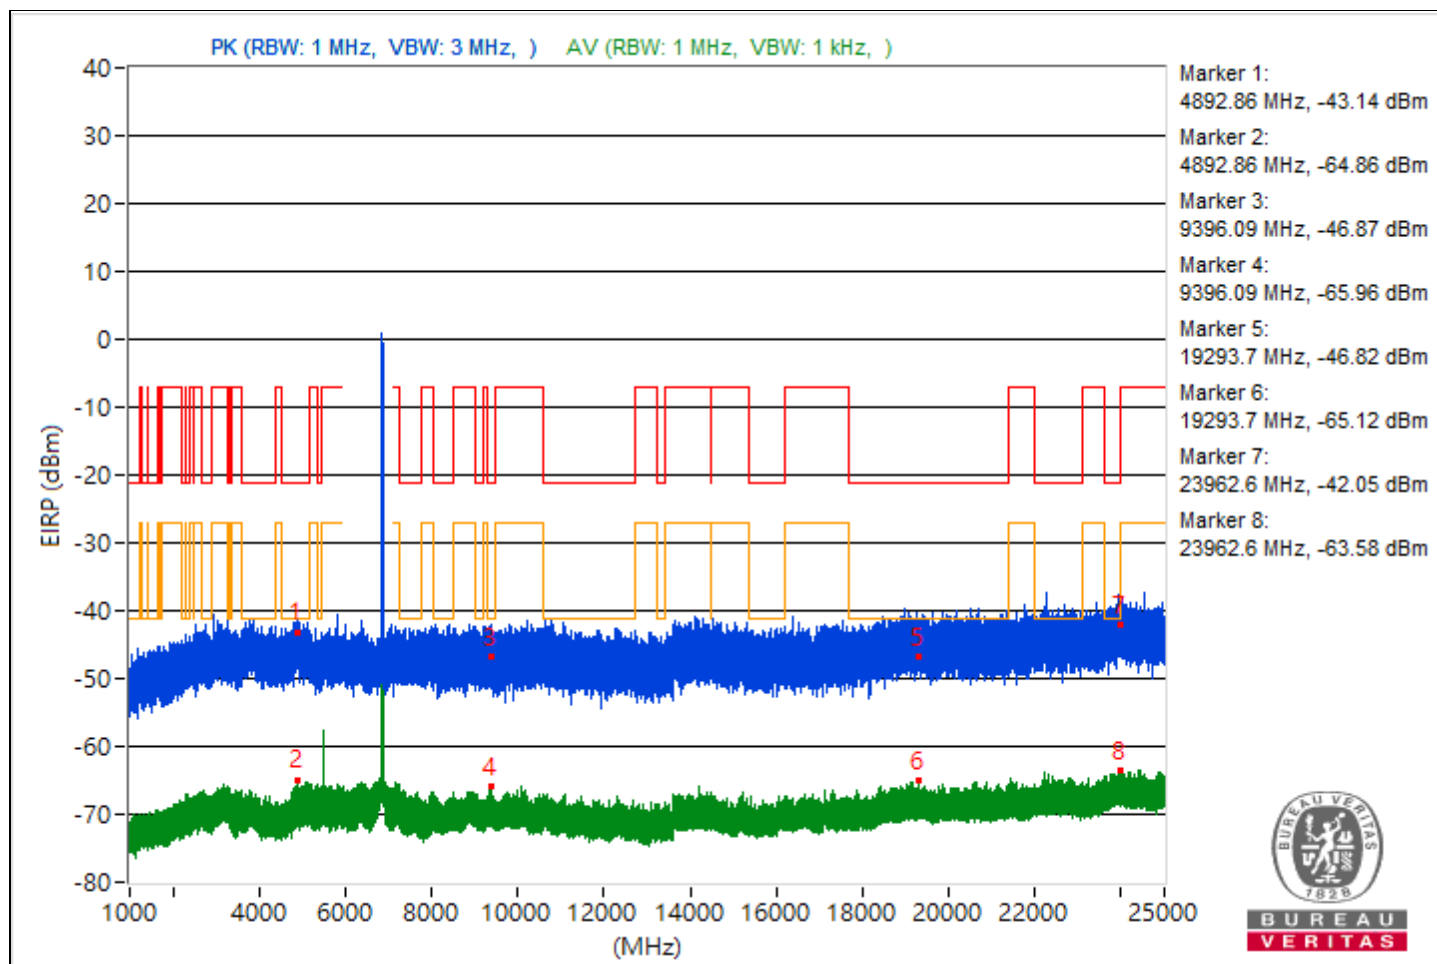


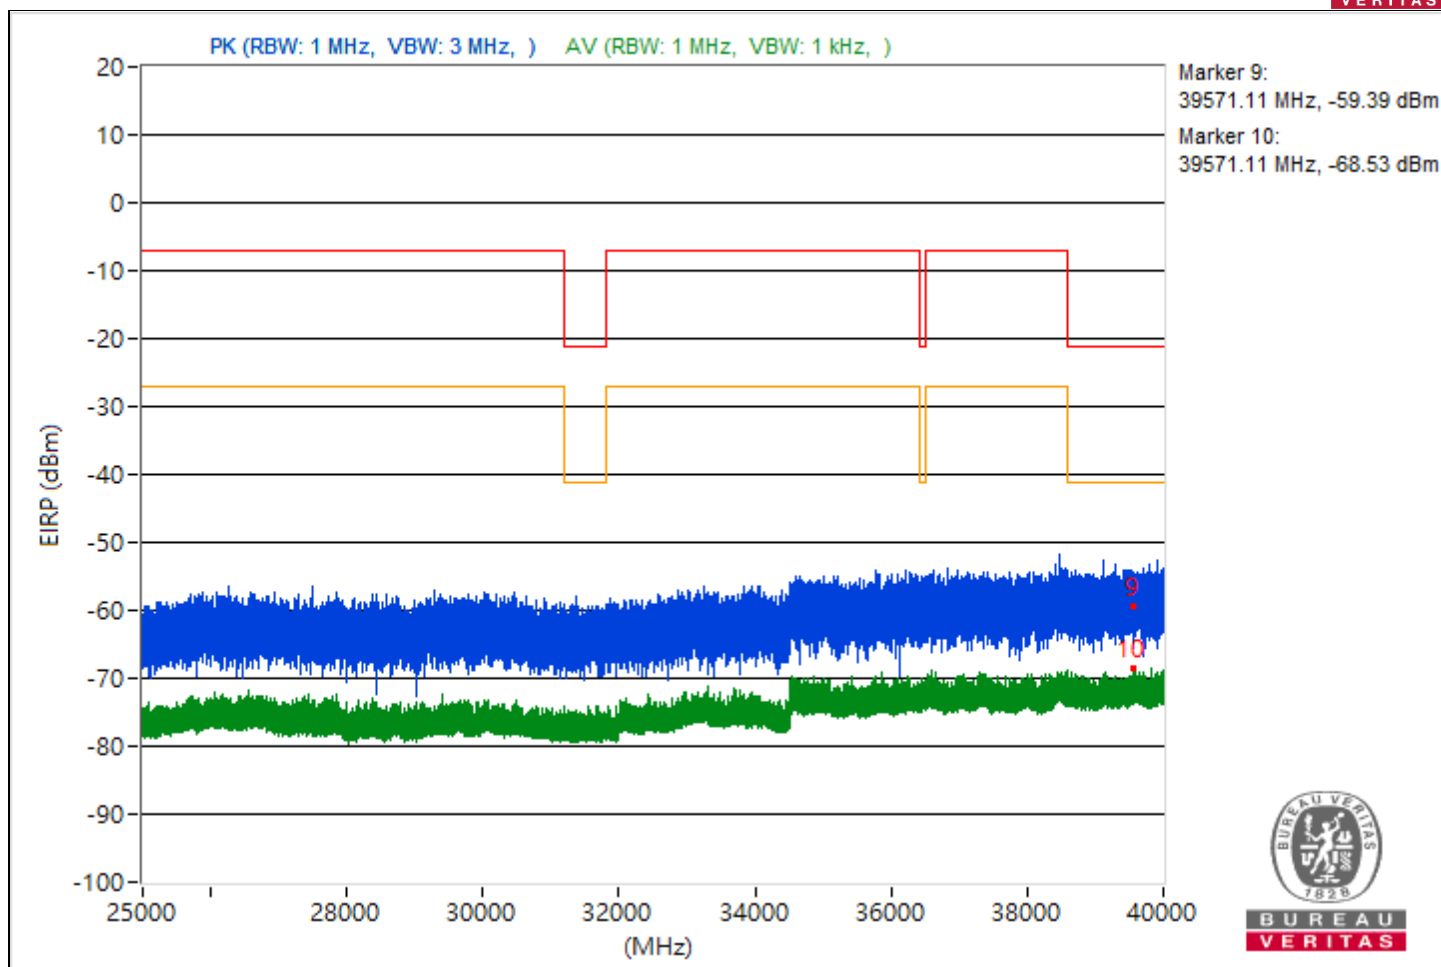


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3710.71	47.82 PK	74	-26.18	-52.6	5.16	-47.44
2	3710.71	29.1 AV	54	-24.9	-71.32	5.16	-66.16
3	8398.13	48.56 PK	74	-25.44	-51.86	5.16	-46.7
4	8398.13	28.47 AV	54	-25.53	-71.95	5.16	-66.79
5	19182.1	50.54 PK	74	-23.46	-49.88	5.16	-44.72
6	19182.1	30.71 AV	54	-23.29	-69.71	5.16	-64.55
7	23972.4	54.7 PK	74	-19.3	-45.72	5.16	-40.56
8	23972.4	31.42 AV	54	-22.58	-69	5.16	-63.84
9	39705.16	38.92 PK	74	-35.08	-61.5	5.16	-56.34
10	39705.16	26.87 AV	54	-27.13	-73.55	5.16	-68.39

Note: Margin value = Emission Level - Limit value

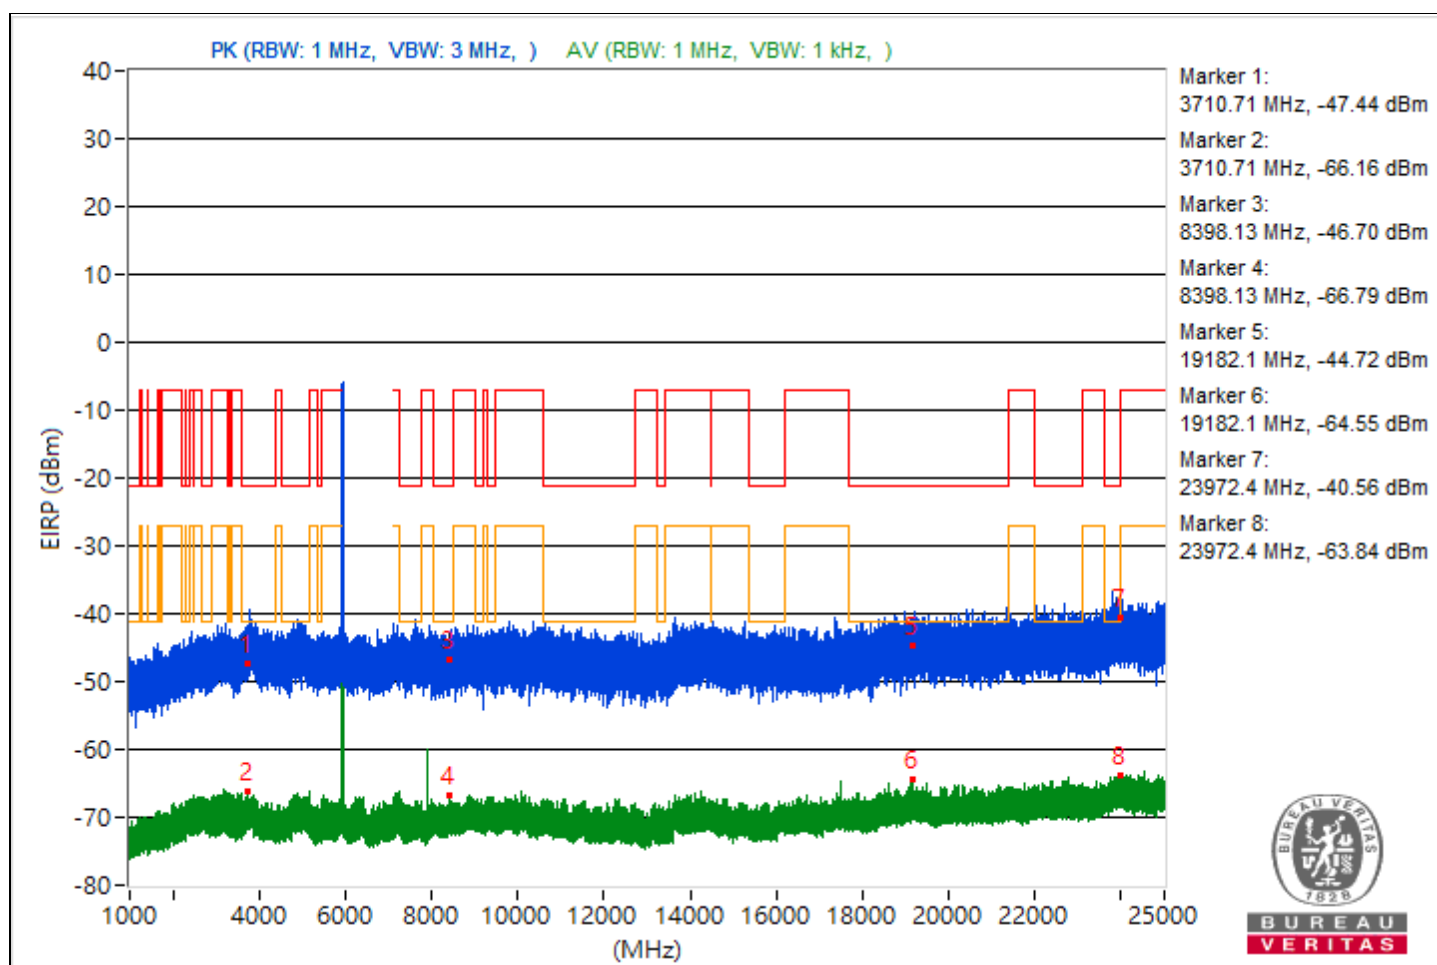


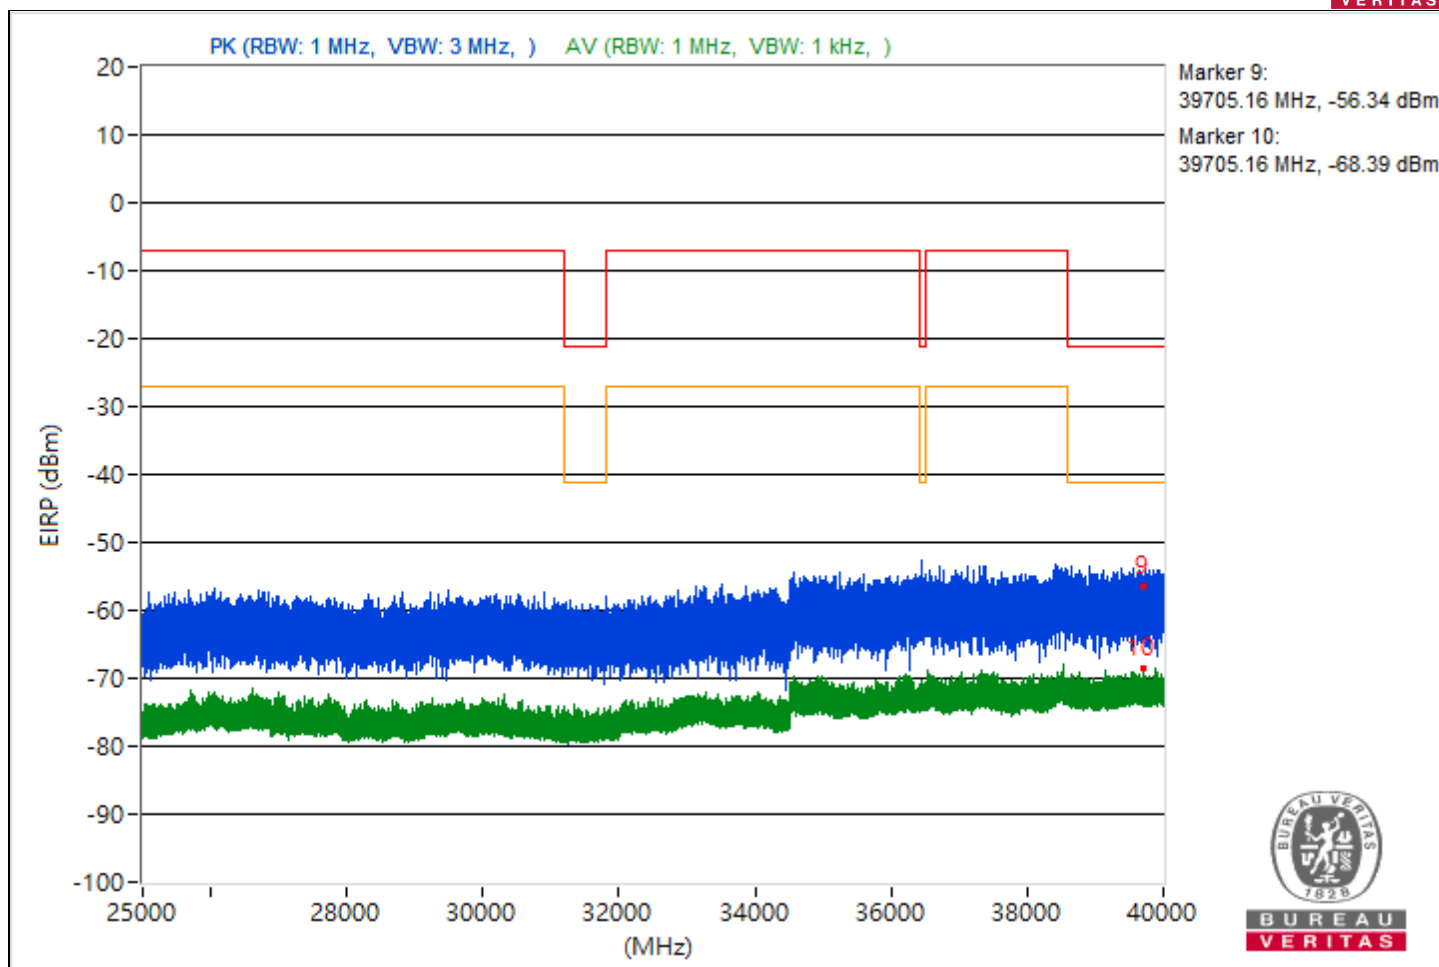


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5045.38	50.65 PK	74	-23.35	-49.77	5.16	-44.61
2	5045.38	30.44 AV	54	-23.56	-69.98	5.16	-64.82
3	9408.44	47.22 PK	74	-26.78	-53.2	5.16	-48.04
4	9408.44	29.78 AV	54	-24.22	-70.64	5.16	-65.48
5	19428.1	49.52 PK	74	-24.48	-50.9	5.16	-45.74
6	19428.1	31.64 AV	54	-22.36	-68.78	5.16	-63.62
7	23883.4	50.73 PK	74	-23.27	-49.69	5.16	-44.53
8	23883.4	32.99 AV	54	-21.01	-67.43	5.16	-62.27
9	39686.58	37.63 PK	74	-36.37	-62.79	5.16	-57.63
10	39686.58	28.32 AV	54	-25.68	-72.1	5.16	-66.94

Note: Margin value = Emission Level - Limit value

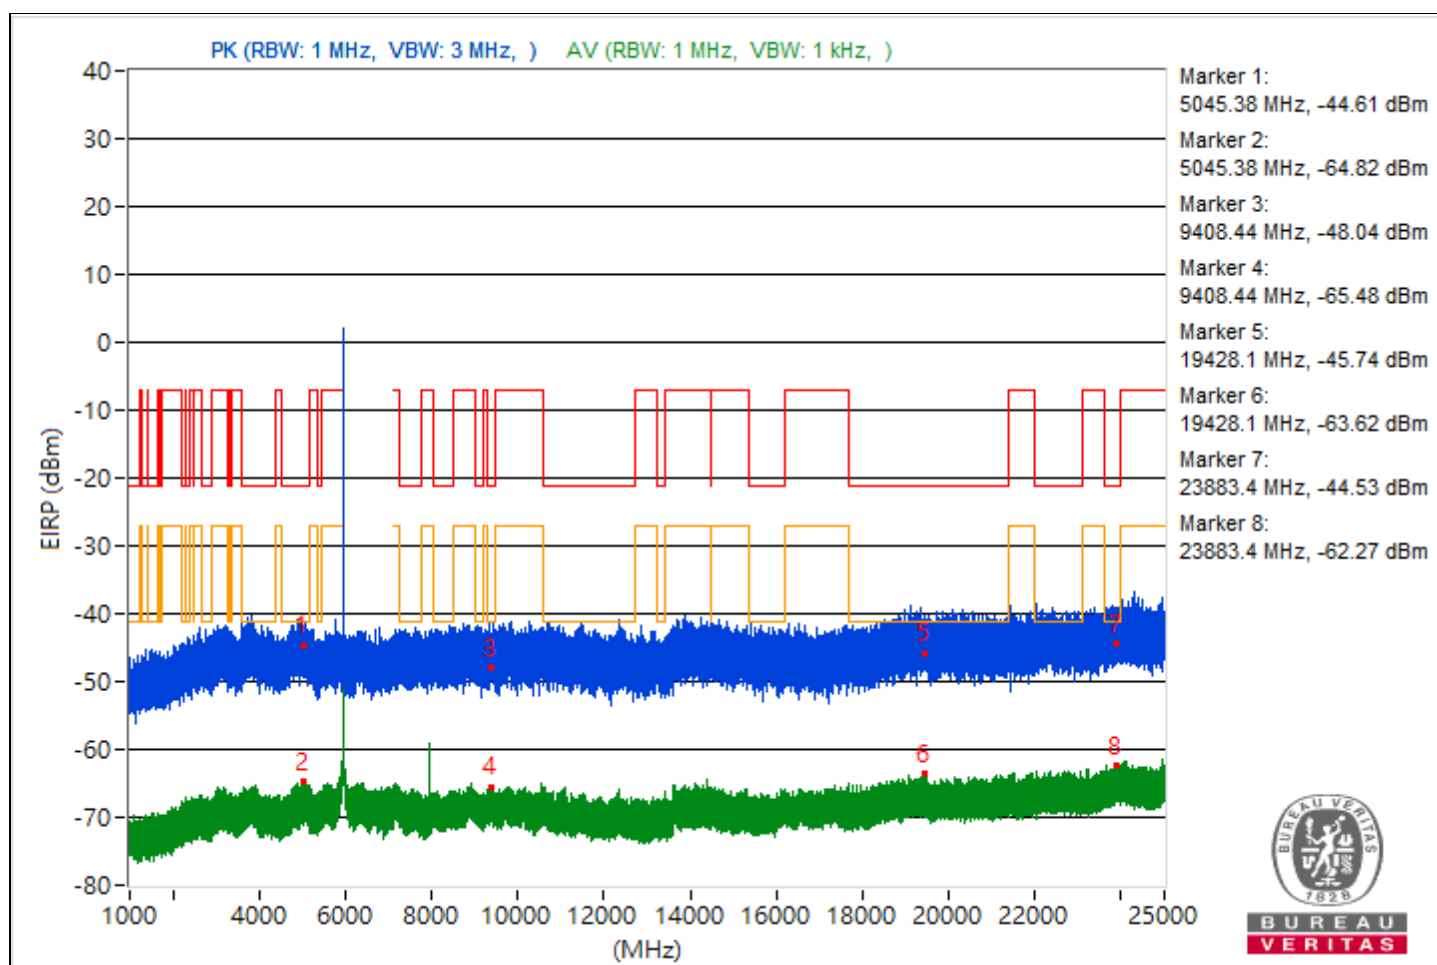


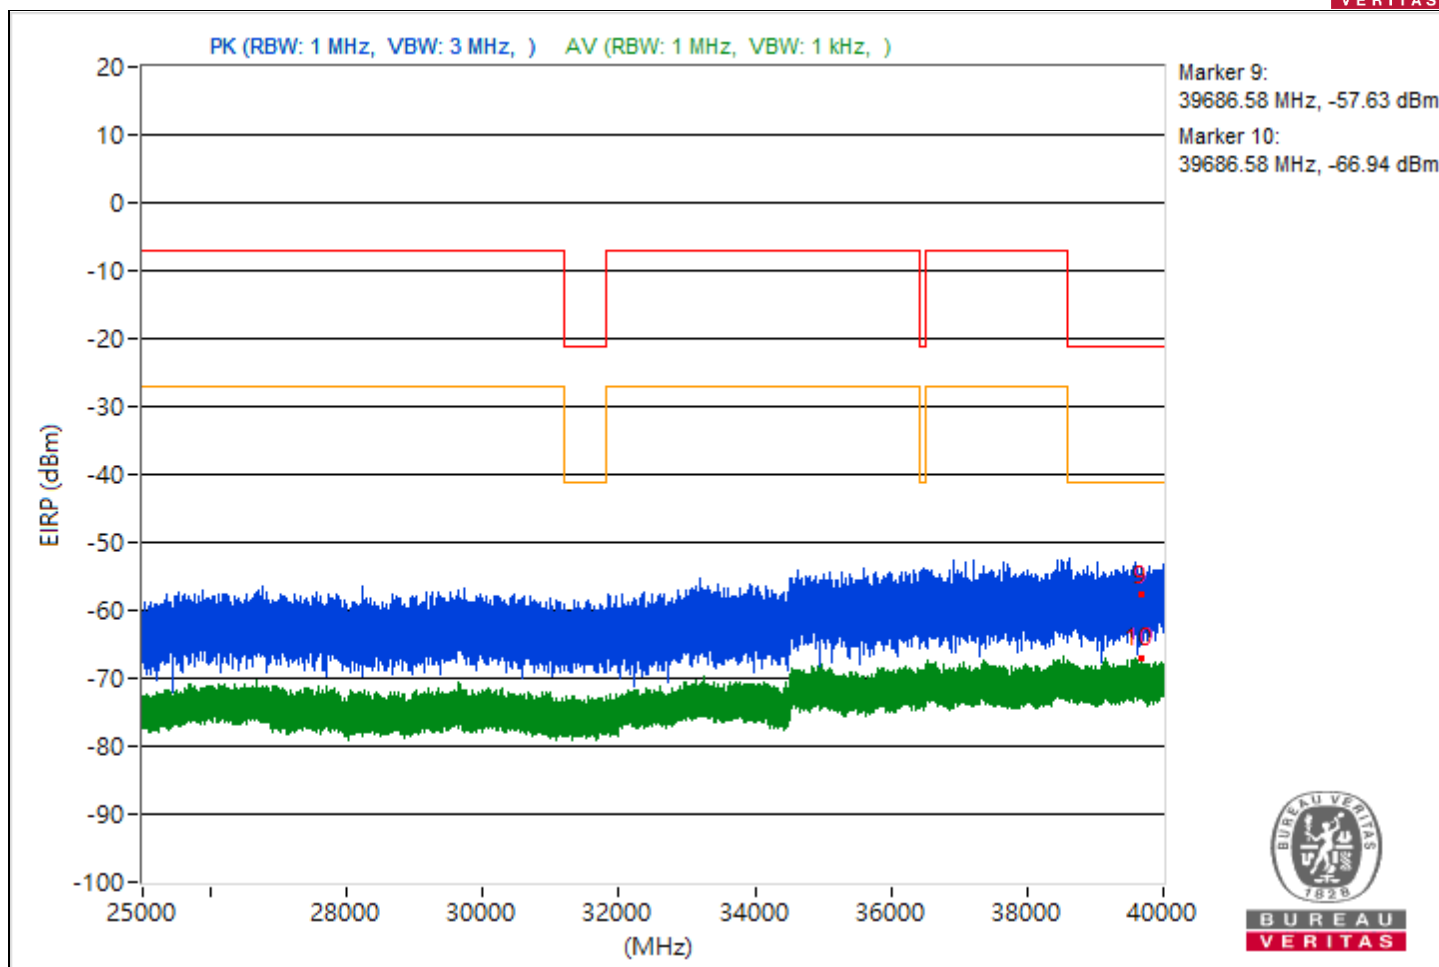


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5110.4	48.95 PK	74	-25.05	-51.47	5.16	-46.31
2	5110.4	31.16 AV	54	-22.84	-69.26	5.16	-64.1
3	7250.92	49.21 PK	74	-24.79	-51.21	5.16	-46.05
4	7250.92	29.8 AV	54	-24.2	-70.62	5.16	-65.46
5	19091.2	50.34 PK	74	-23.66	-50.08	5.16	-44.92
6	19091.2	31.29 AV	54	-22.71	-69.13	5.16	-63.97
7	23954.3	51.91 PK	74	-22.09	-48.51	5.16	-43.35
8	23954.3	32.9 AV	54	-21.1	-67.52	5.16	-62.36
9	39531.29	32.98 PK	74	-41.02	-67.44	5.16	-62.28
10	39531.29	27.78 AV	54	-26.22	-72.64	5.16	-67.48

Note: Margin value = Emission Level - Limit value

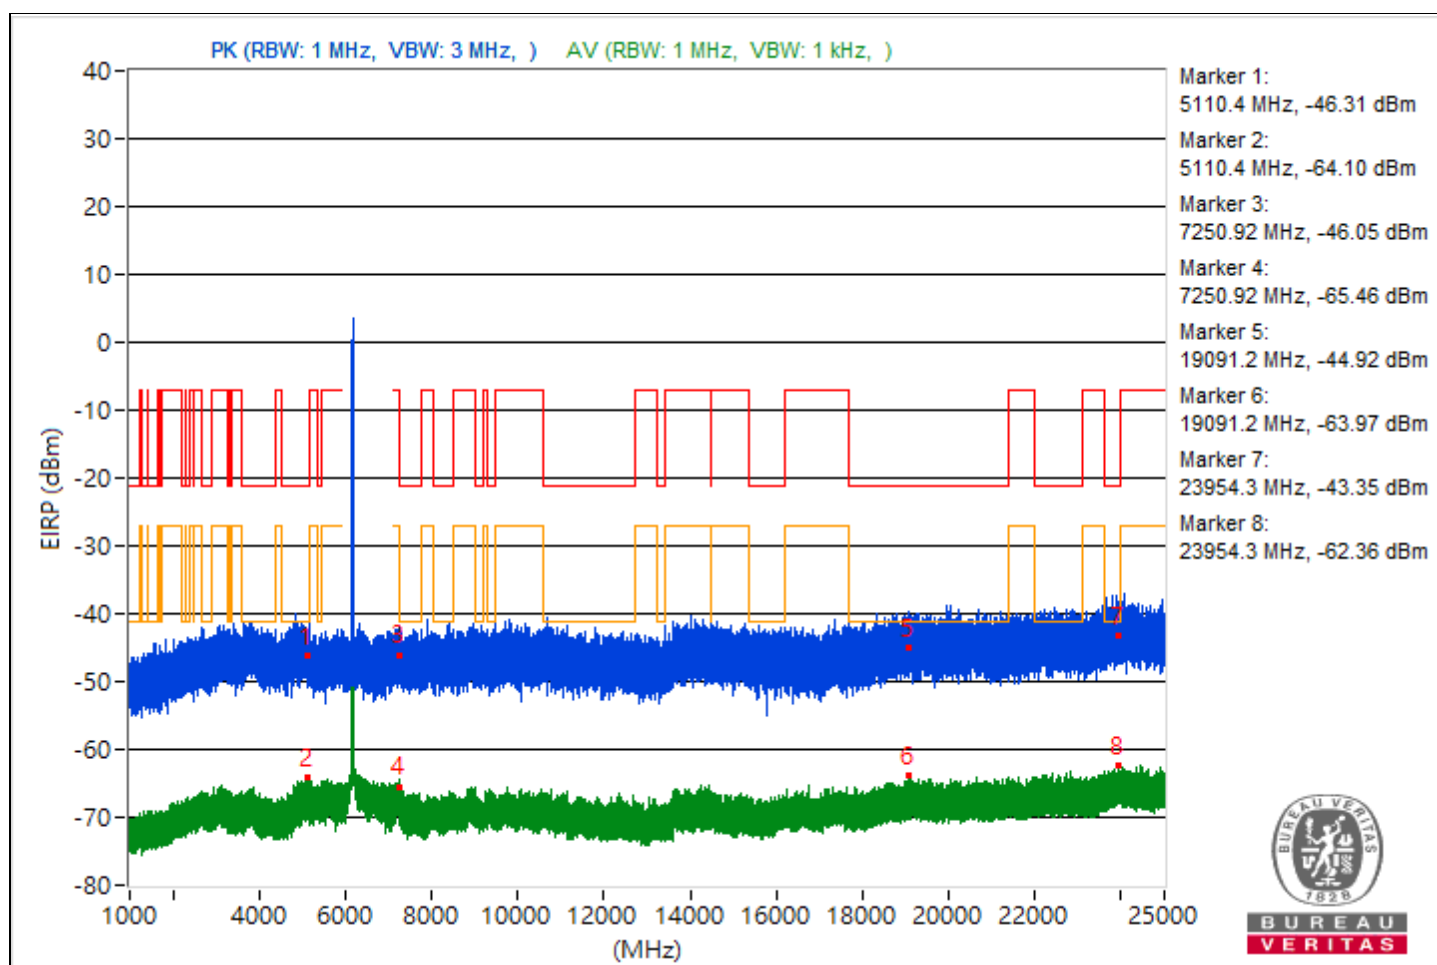


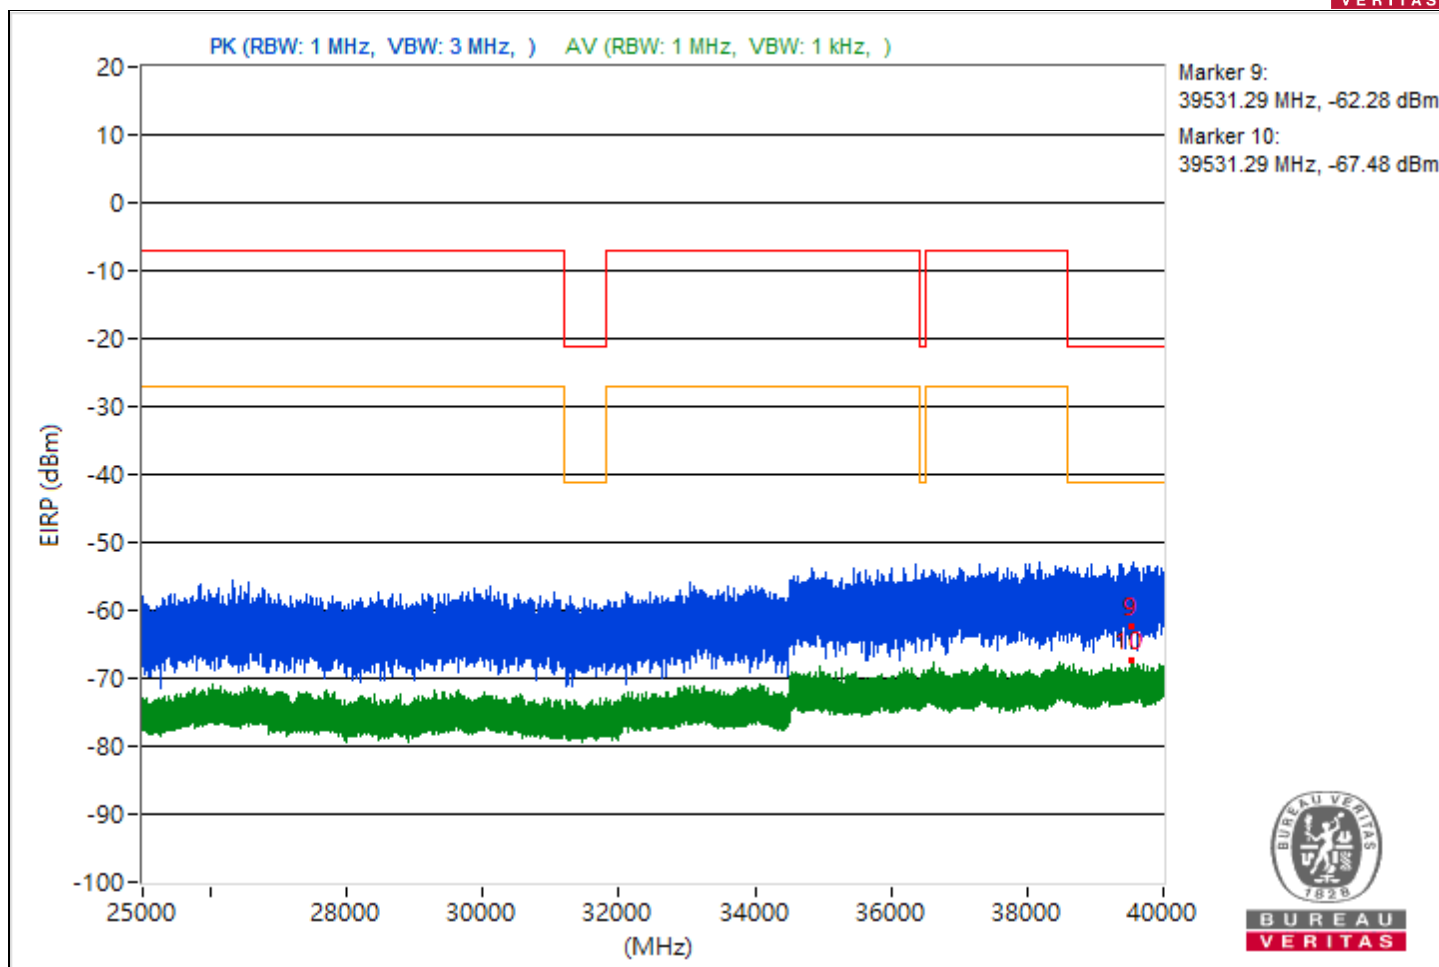


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4893.71	49.8 PK	74	-24.2	-50.62	5.16	-45.46
2	4893.71	30.52 AV	54	-23.48	-69.9	5.16	-64.74
3	7253.26	49.5 PK	74	-24.5	-50.92	5.16	-45.76
4	7253.26	29.52 AV	54	-24.48	-70.9	5.16	-65.74
5	19895.8	52.41 PK	74	-21.59	-48.01	5.16	-42.85
6	19895.8	31.15 AV	54	-22.85	-69.27	5.16	-64.11
7	23970.5	53.34 PK	74	-20.66	-47.08	5.16	-41.92
8	23970.5	32.67 AV	54	-21.33	-67.75	5.16	-62.59
9	39947.73	34.53 PK	74	-39.47	-65.89	5.16	-60.73
10	39947.73	27.7 AV	54	-26.3	-72.72	5.16	-67.56

Note: Margin value = Emission Level - Limit value

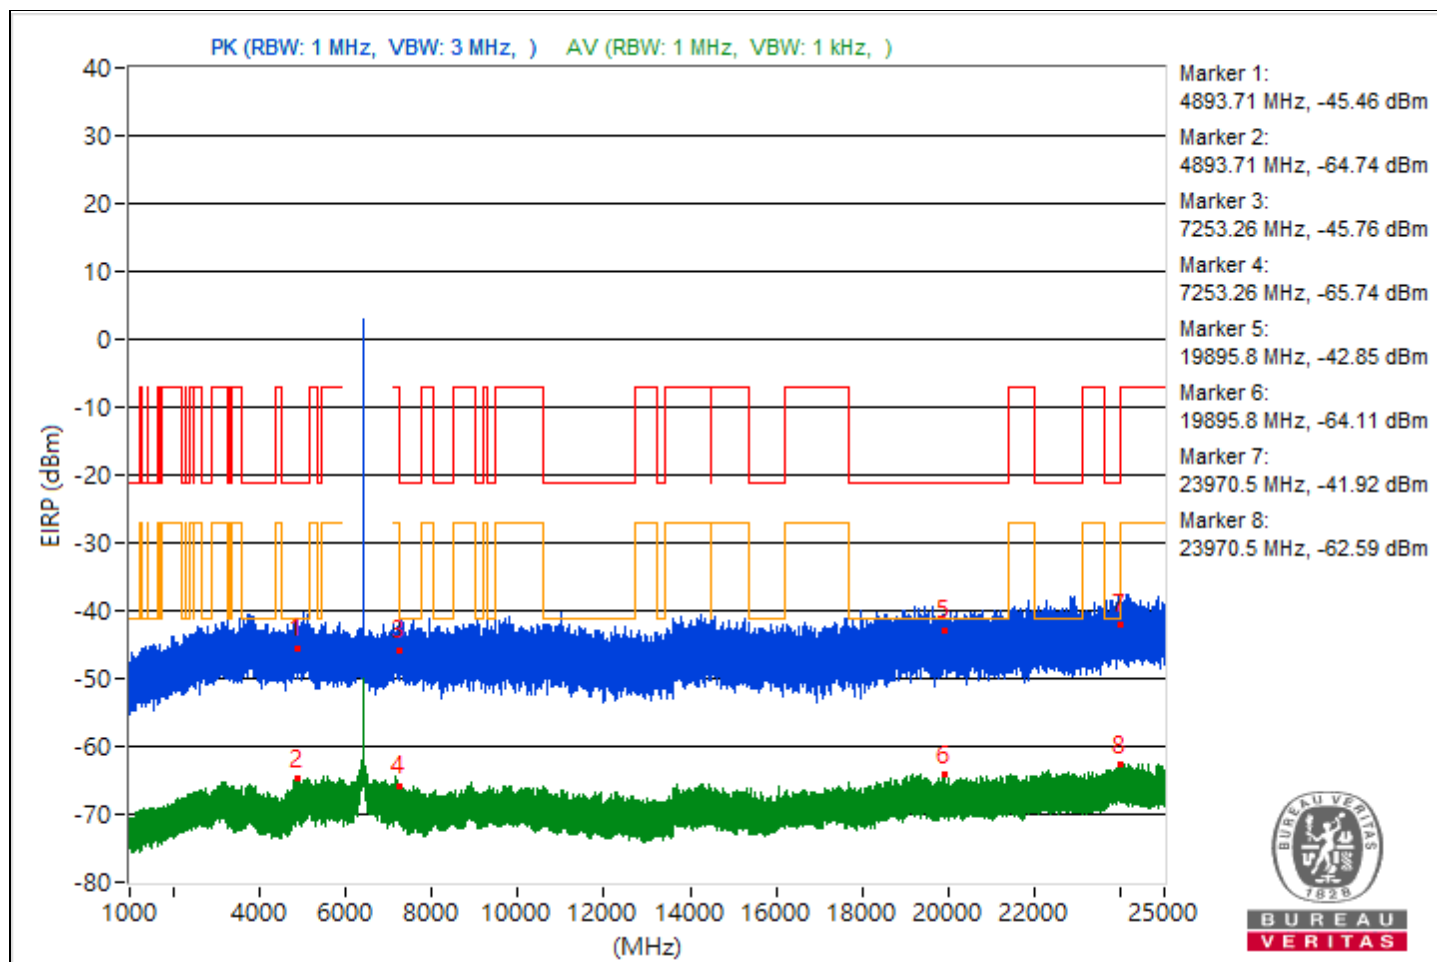


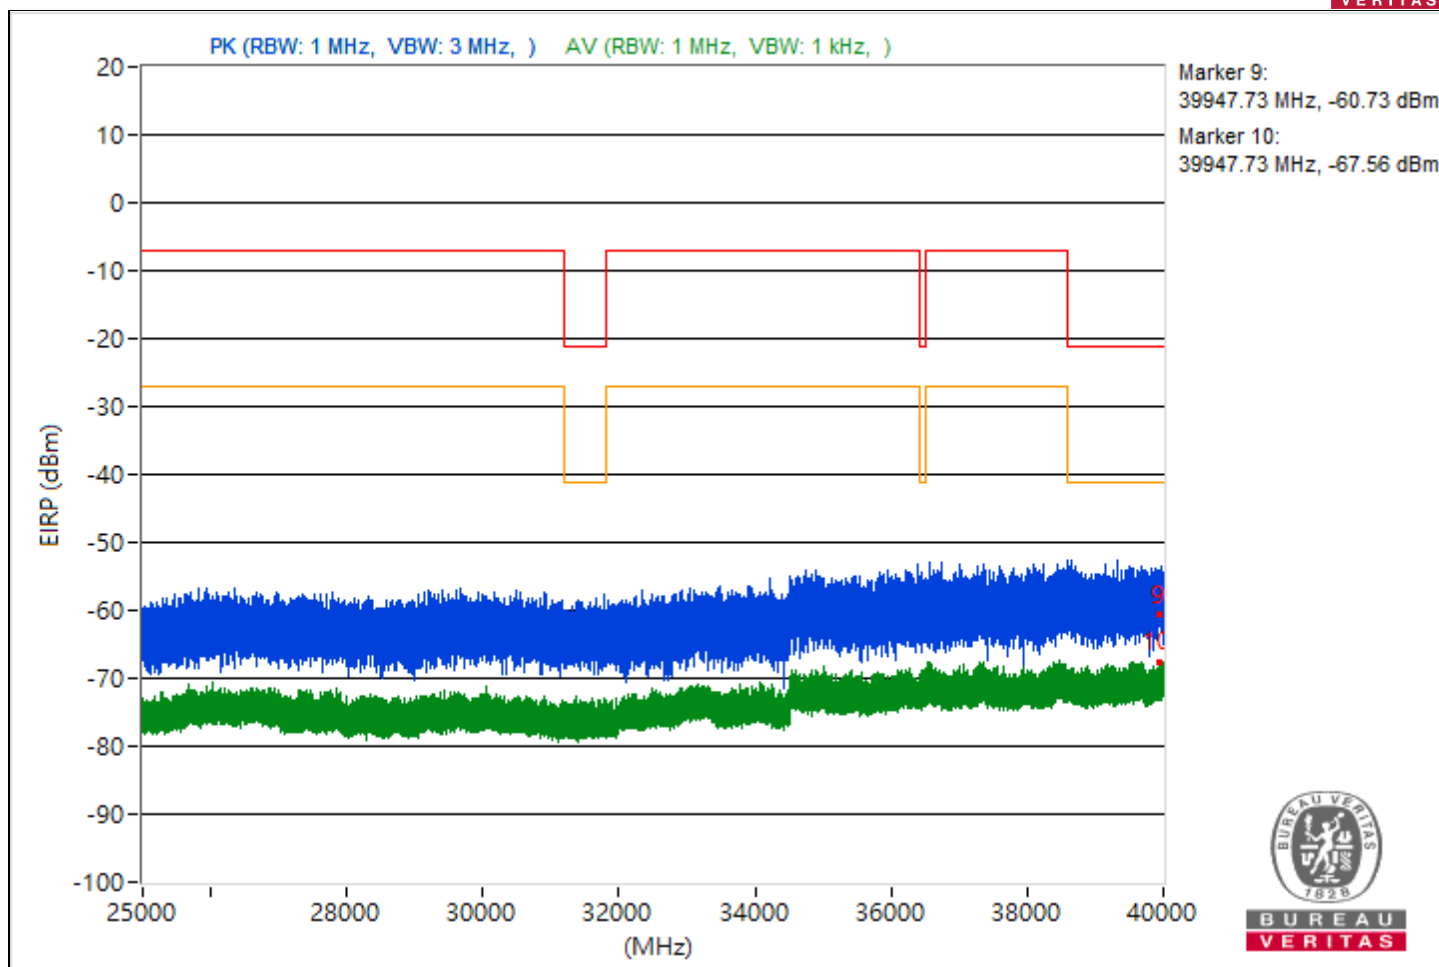


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4904.99	49.67 PK	74	-24.33	-50.75	5.16	-45.59
2	4904.99	30.95 AV	54	-23.05	-69.47	5.16	-64.31
3	7253.26	50.15 PK	74	-23.85	-50.27	5.16	-45.11
4	7253.26	29.97 AV	54	-24.03	-70.45	5.16	-65.29
5	19314.5	54.28 PK	74	-19.72	-46.14	5.16	-40.98
6	19314.5	31.36 AV	54	-22.64	-69.06	5.16	-63.9
7	23967.8	55.75 PK	74	-18.25	-44.67	5.16	-39.51
8	23967.8	32.44 AV	54	-21.56	-67.98	5.16	-62.82
9	39956.62	36.16 PK	74	-37.84	-64.26	5.16	-59.1
10	39956.62	28.07 AV	54	-25.93	-72.35	5.16	-67.19

Note: Margin value = Emission Level - Limit value

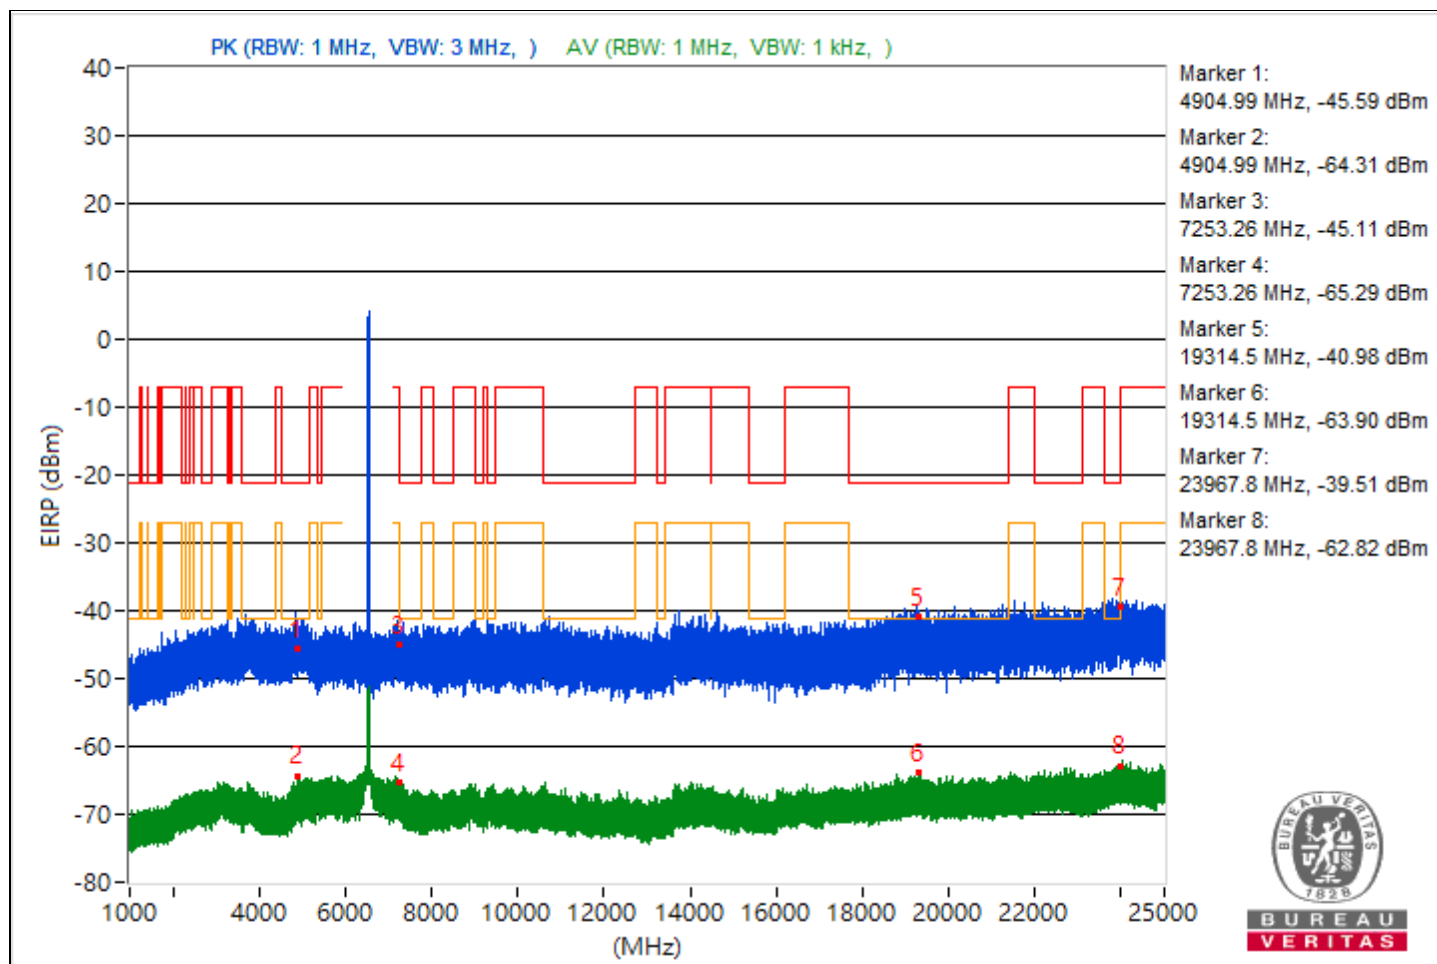


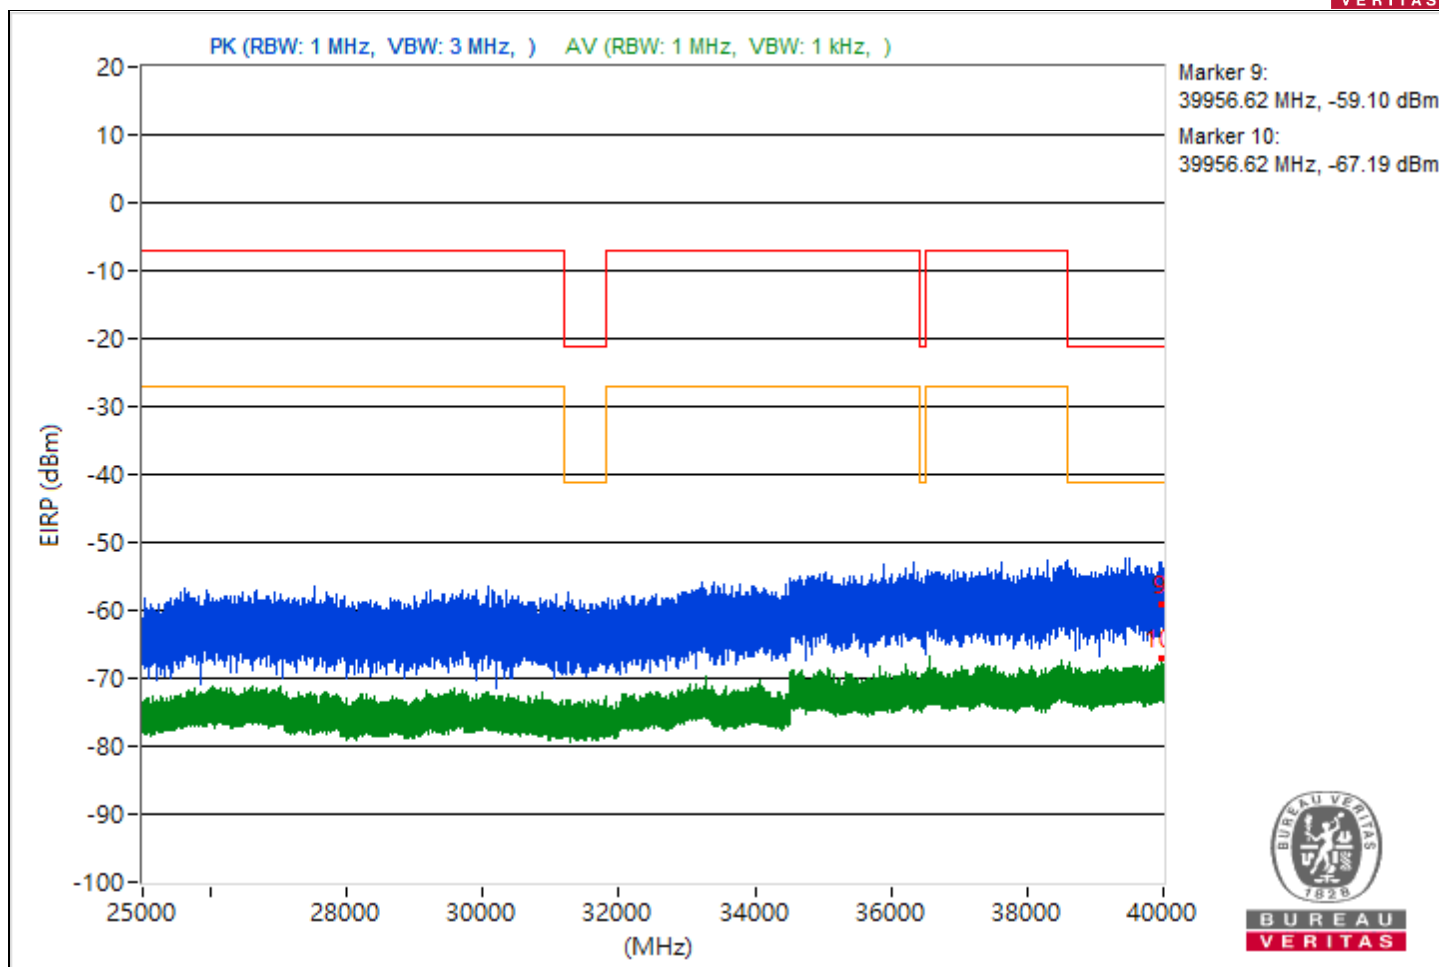


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5087.46	49.1 PK	74	-24.9	-51.32	5.16	-46.16
2	5087.46	31.42 AV	54	-22.58	-69	5.16	-63.84
3	7292.92	46.14 PK	74	-27.86	-54.28	5.16	-49.12
4	7292.92	30.86 AV	54	-23.14	-69.56	5.16	-64.4
5	19329.3	51.63 PK	74	-22.37	-48.79	5.16	-43.63
6	19329.3	31.98 AV	54	-22.02	-68.44	5.16	-63.28
7	23863.5	50.57 PK	74	-23.43	-49.85	5.16	-44.69
8	23863.5	33.62 AV	54	-20.38	-66.8	5.16	-61.64
9	39992.18	40.02 PK	74	-33.98	-60.4	5.16	-55.24
10	39992.18	28.7 AV	54	-25.3	-71.72	5.16	-66.56

Note: Margin value = Emission Level - Limit value

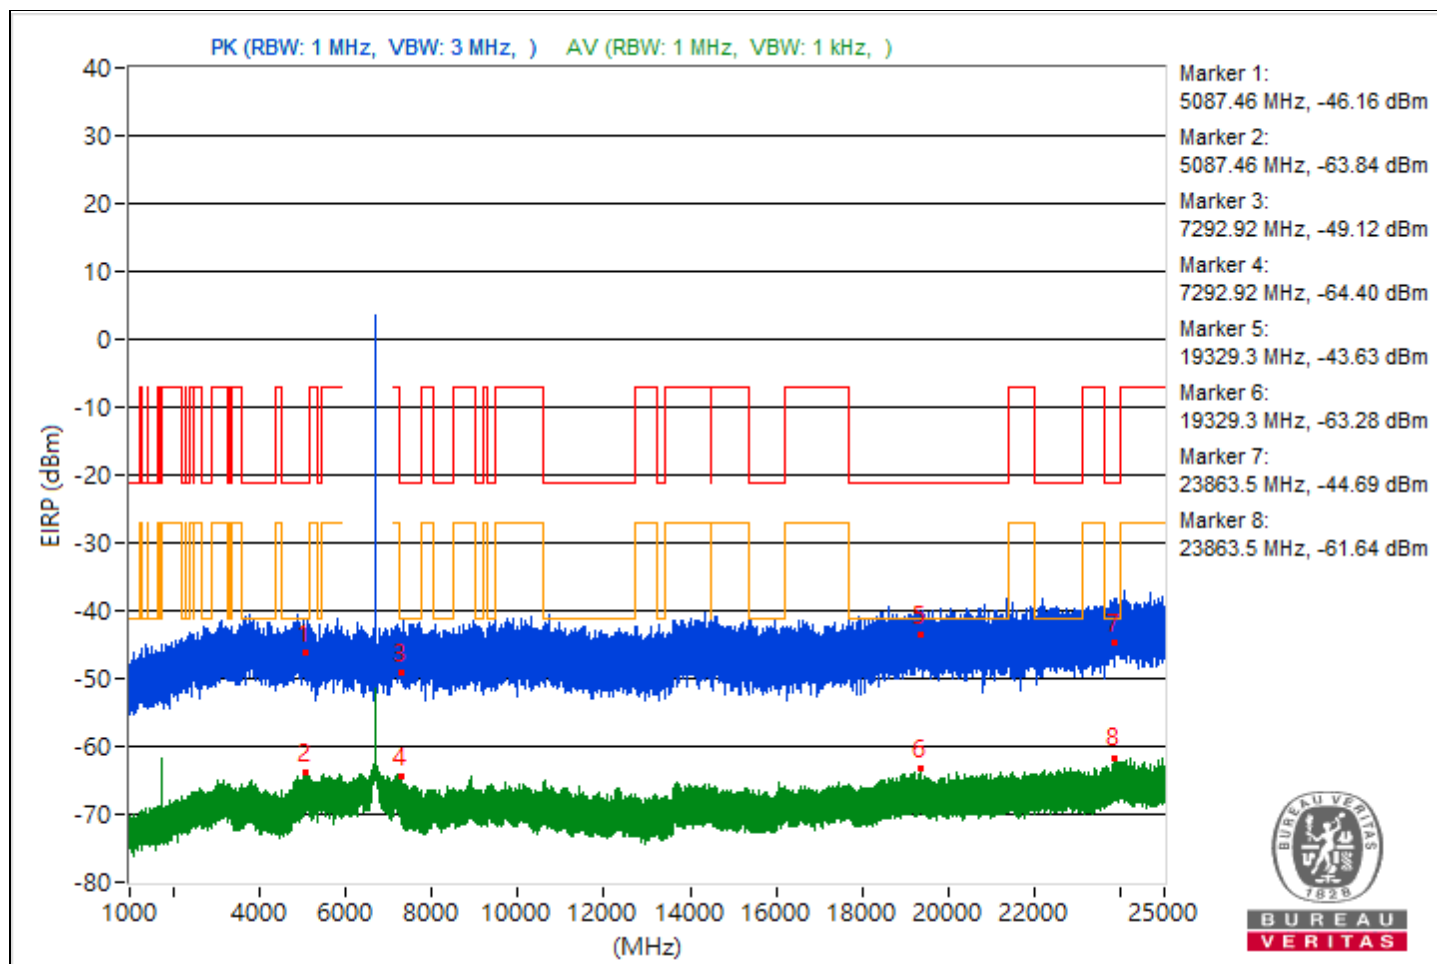


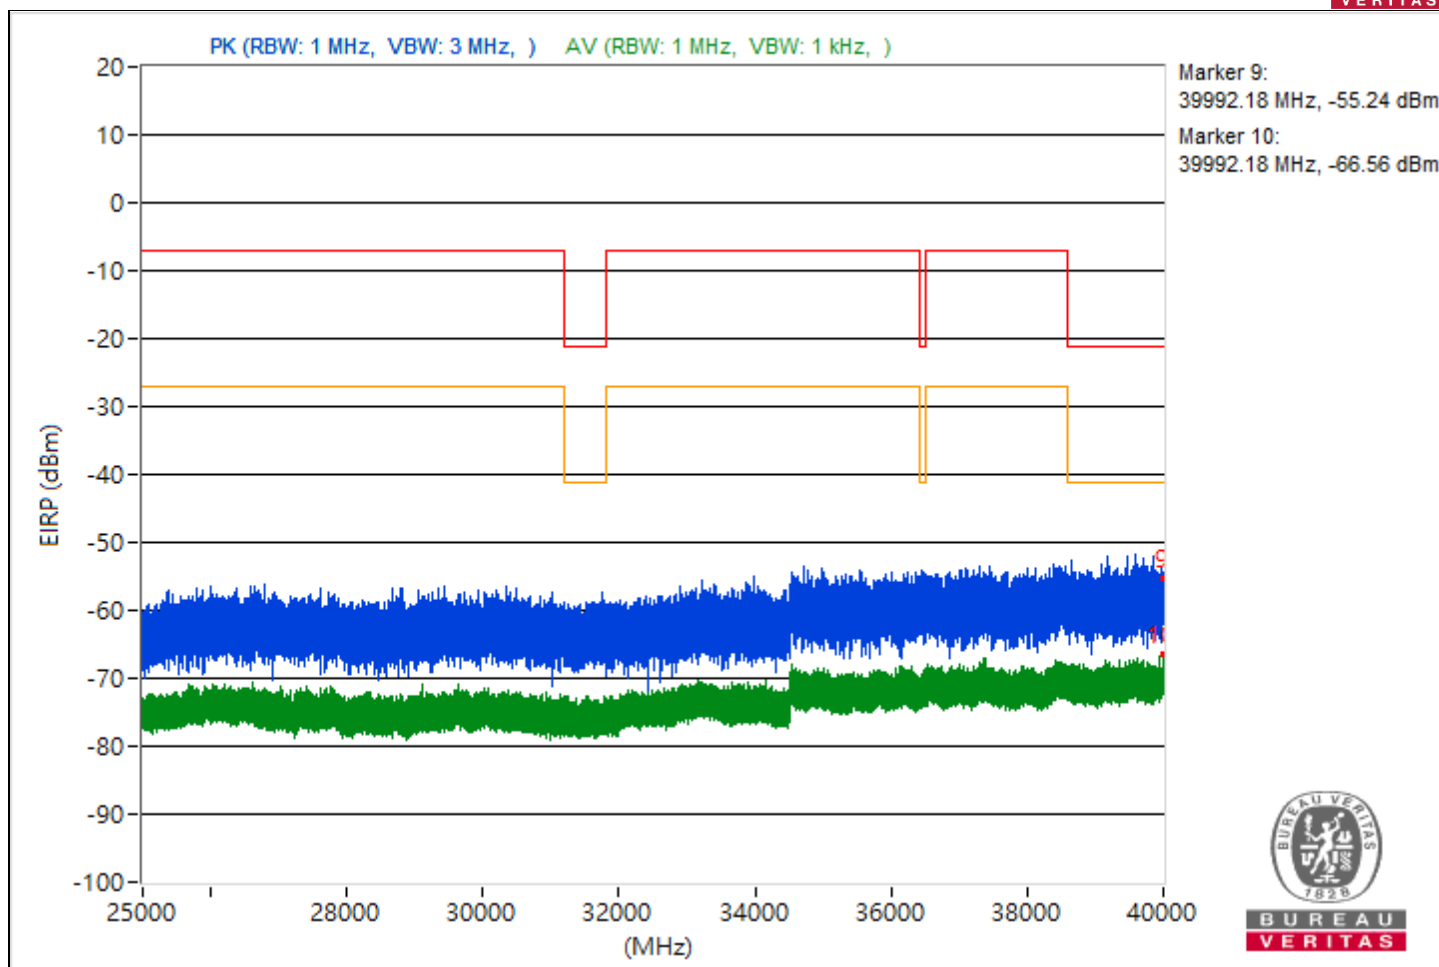


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5099.2	46.9 PK	74	-27.1	-53.52	5.16	-48.36
2	5099.2	31.15 AV	54	-22.85	-69.27	5.16	-64.11
3	7267.57	49.74 PK	74	-24.26	-50.68	5.16	-45.52
4	7267.57	30.33 AV	54	-23.67	-70.09	5.16	-64.93
5	21149.2	51.42 PK	74	-22.58	-49	5.16	-43.84
6	21149.2	31.96 AV	54	-22.04	-68.46	5.16	-63.3
7	23988.3	54.06 PK	74	-19.94	-46.36	5.16	-41.2
8	23988.3	33.31 AV	54	-20.69	-67.11	5.16	-61.95
9	39573.33	34.89 PK	74	-39.11	-65.53	5.16	-60.37
10	39573.33	28.49 AV	54	-25.51	-71.93	5.16	-66.77

Note: Margin value = Emission Level - Limit value

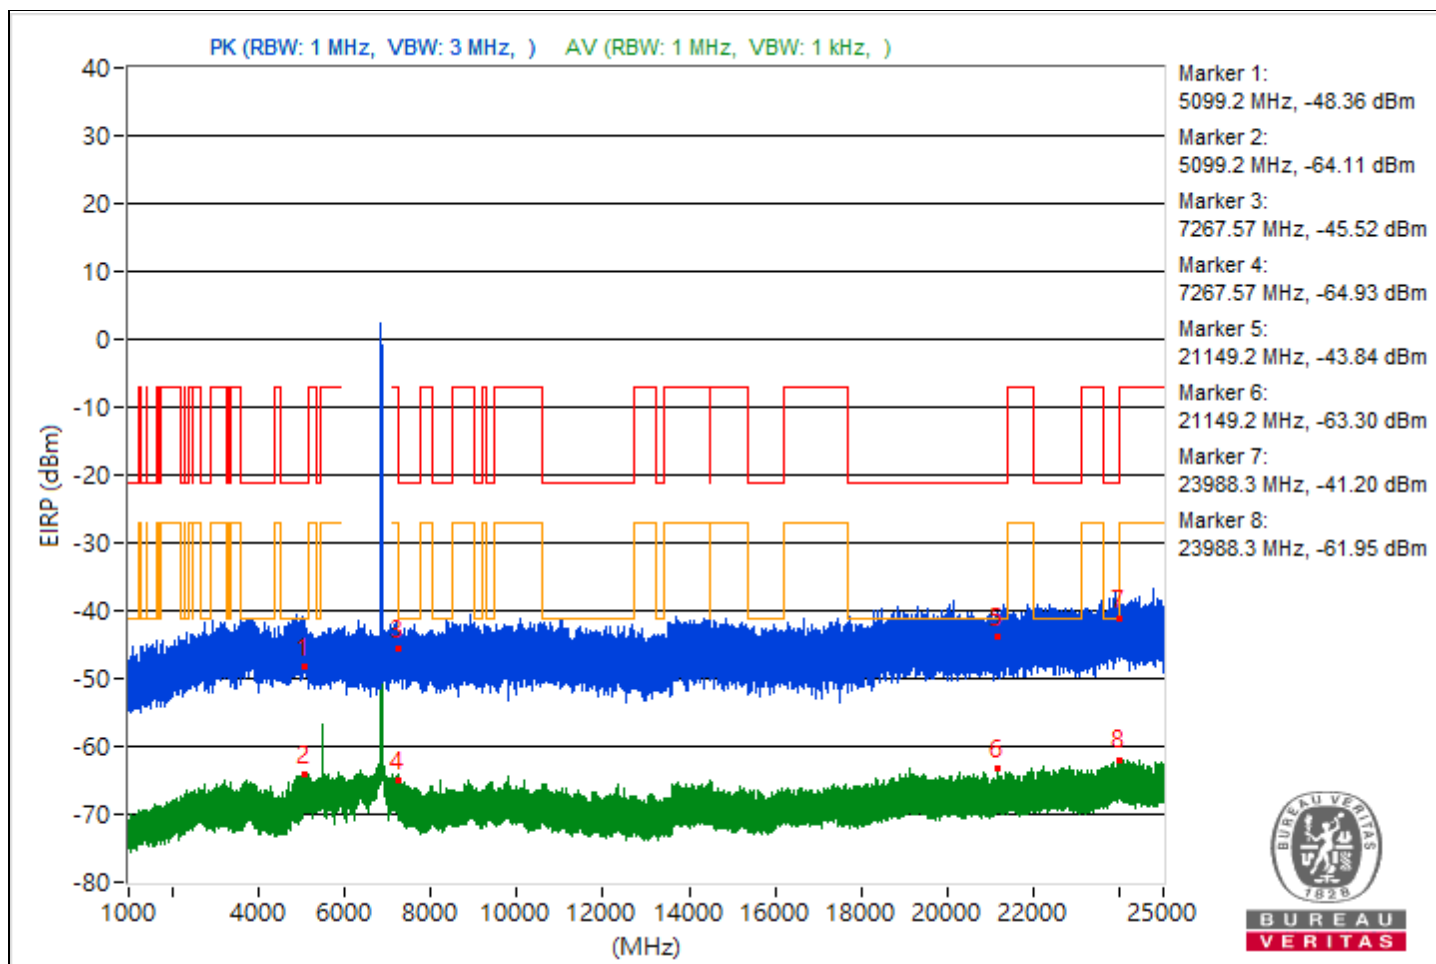


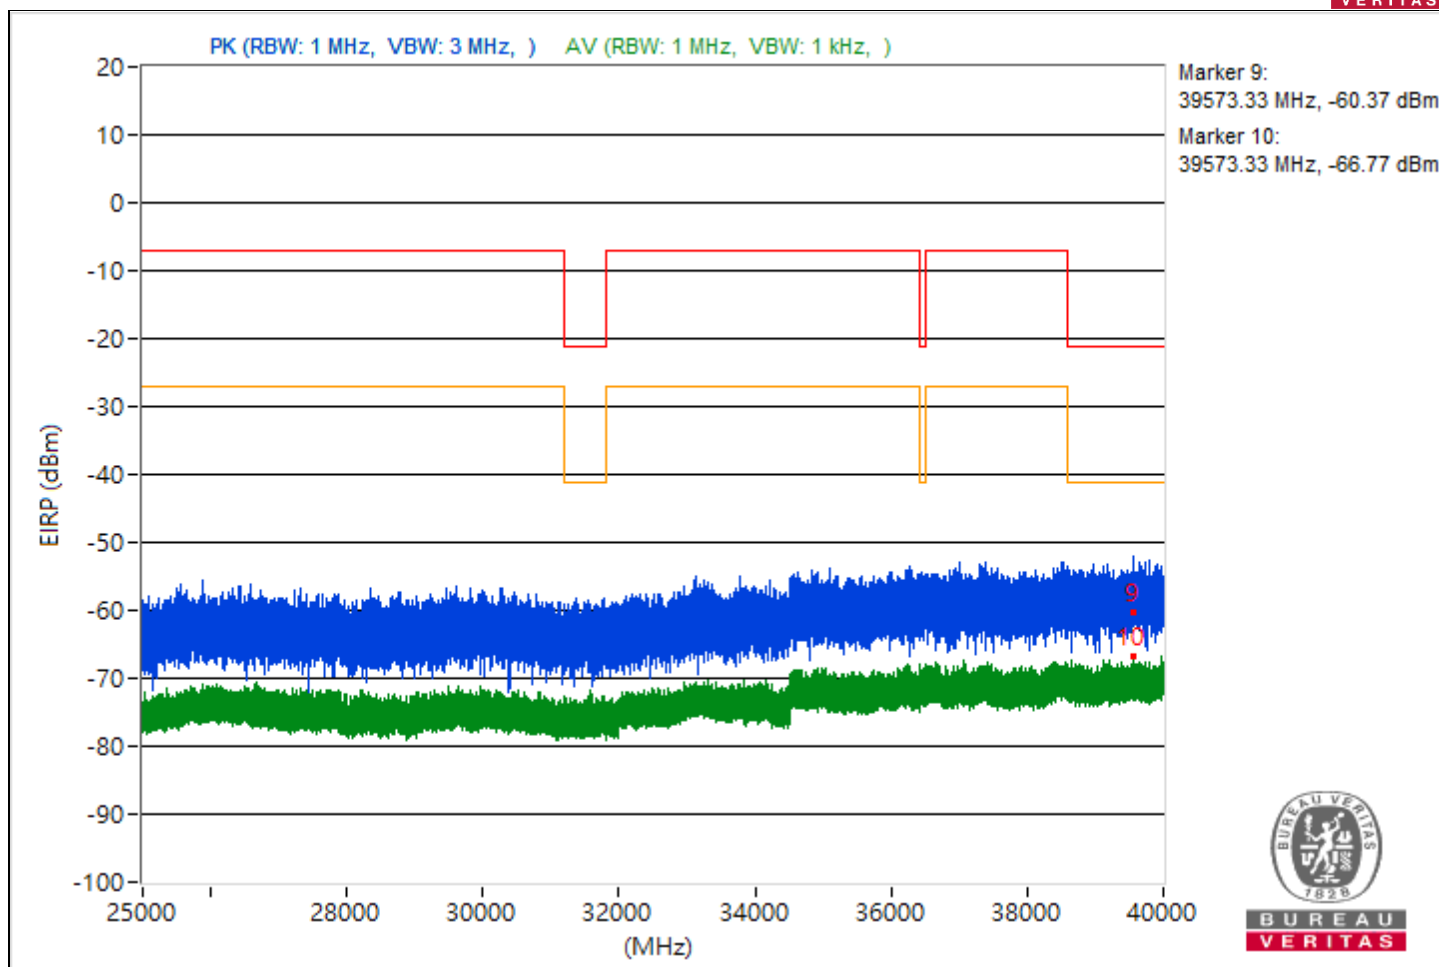


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5034.33	50.47 PK	74	-23.53	-49.95	5.16	-44.79
2	5034.33	31.57 AV	54	-22.43	-68.85	5.16	-63.69
3	10607.82	48.69 PK	74	-25.31	-51.73	5.16	-46.57
4	10607.82	30.58 AV	54	-23.42	-69.84	5.16	-64.68
5	20703.5	54.53 PK	74	-19.47	-45.89	5.16	-40.73
6	20703.5	31.63 AV	54	-22.37	-68.79	5.16	-63.63
7	23901.7	52.35 PK	74	-21.65	-48.07	5.16	-42.91
8	23901.7	33.34 AV	54	-20.66	-67.08	5.16	-61.92
9	39628.27	37.7 PK	74	-36.3	-62.72	5.16	-57.56
10	39628.27	28.43 AV	54	-25.57	-71.99	5.16	-66.83

Note: Margin value = Emission Level - Limit value

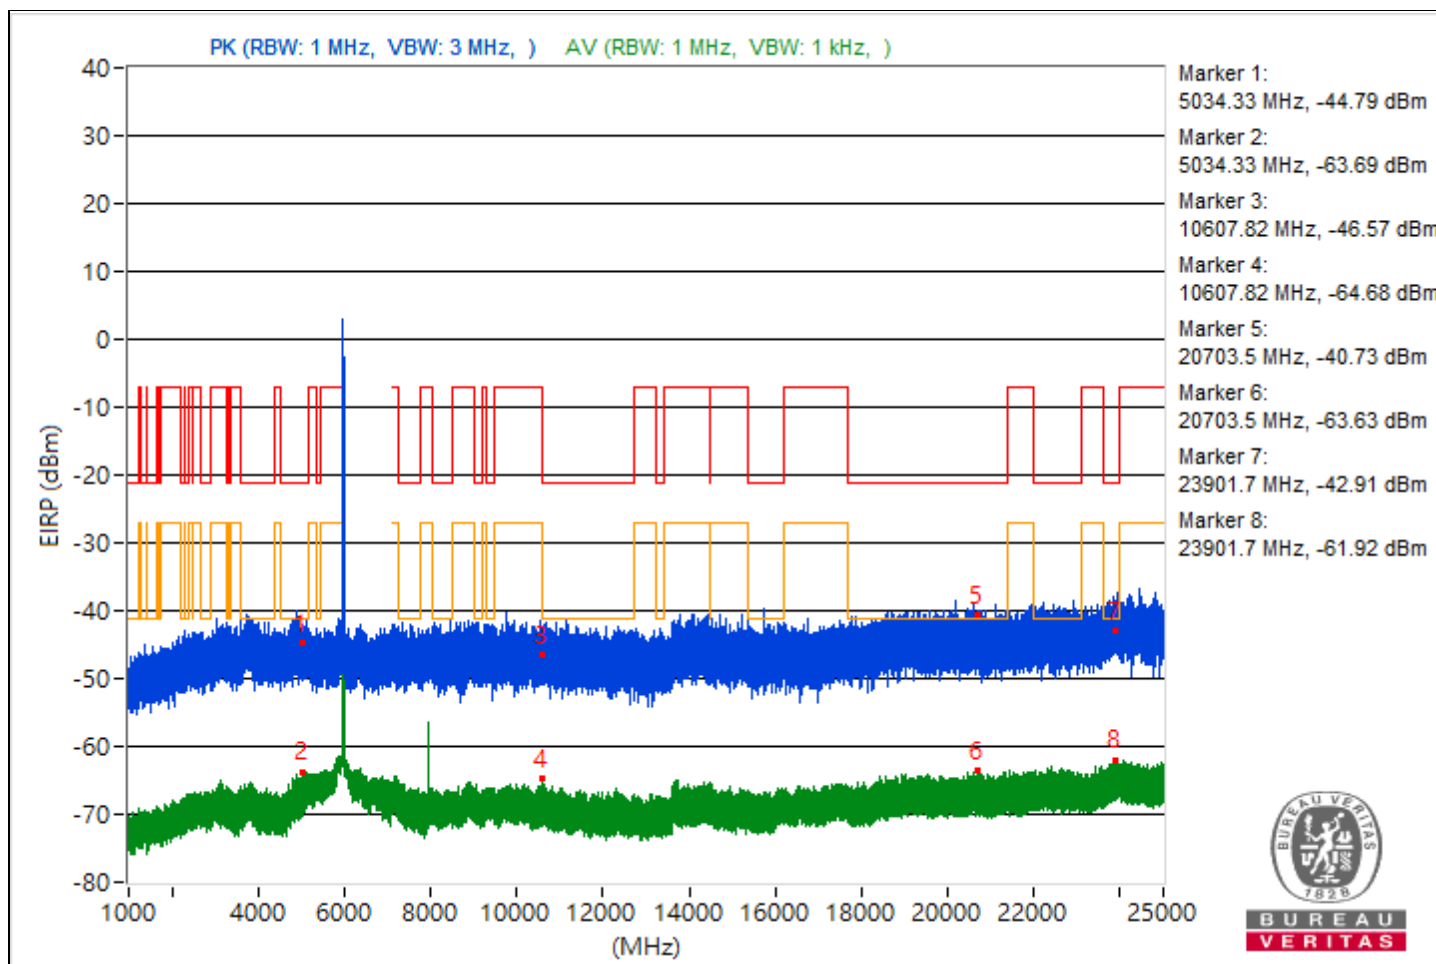


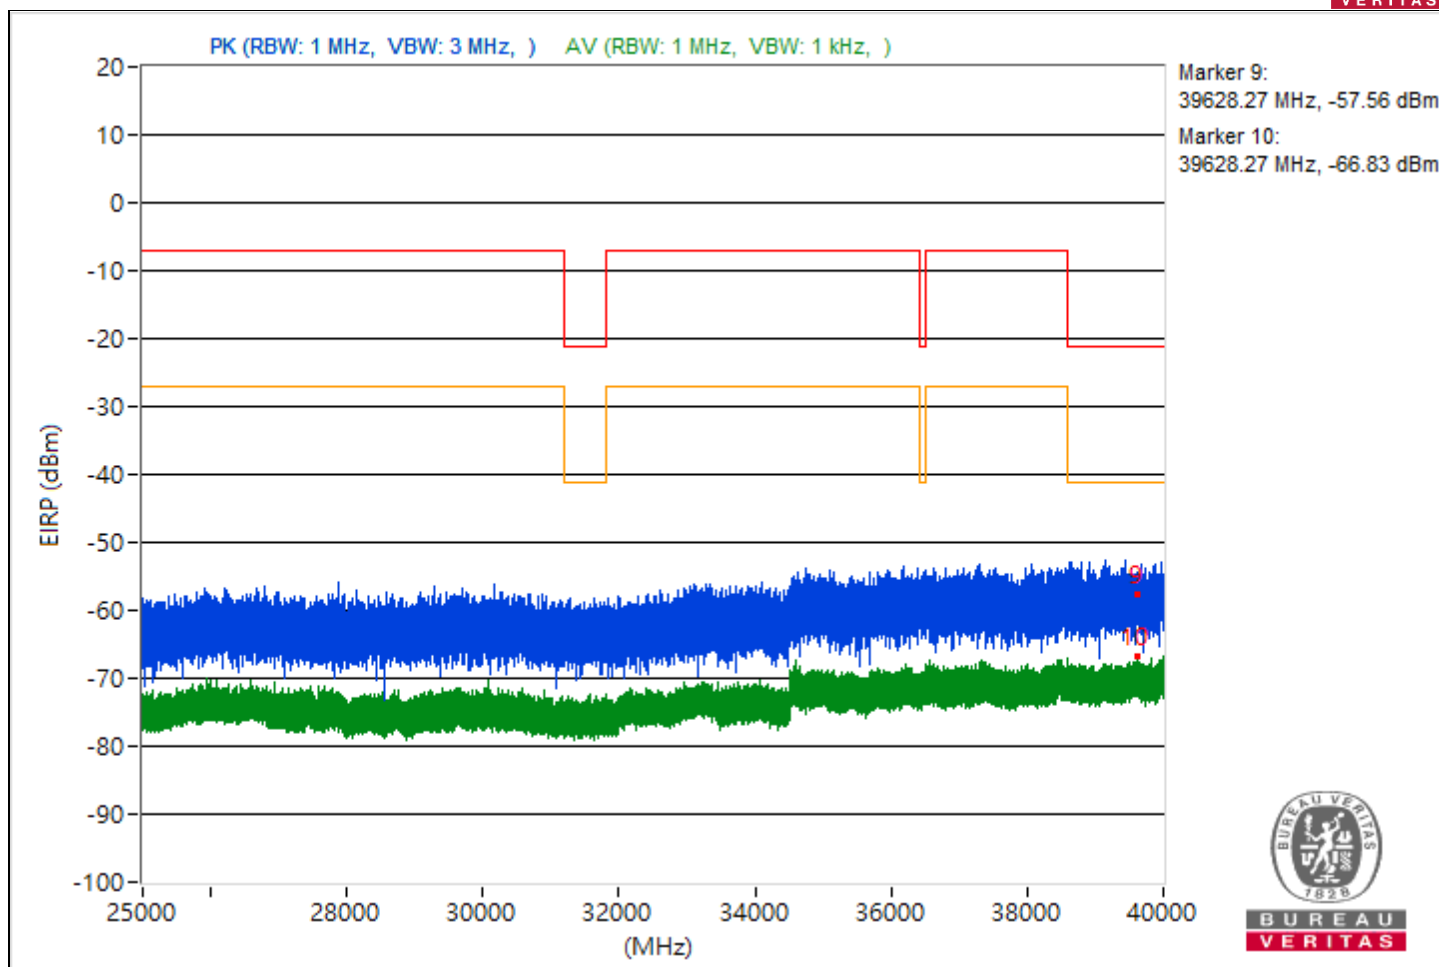


RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4912.61	49.53 PK	74	-24.47	-50.89	5.16	-45.73
2	4912.61	31.43 AV	54	-22.57	-68.99	5.16	-63.83
3	7256.76	48.36 PK	74	-25.64	-52.06	5.16	-46.9
4	7256.76	30.26 AV	54	-23.74	-70.16	5.16	-65
5	19403.4	49.22 PK	74	-24.78	-51.2	5.16	-46.04
6	19403.4	31.71 AV	54	-22.29	-68.71	5.16	-63.55
7	23757.3	52.96 PK	74	-21.04	-47.46	5.16	-42.3
8	23757.3	32.87 AV	54	-21.13	-67.55	5.16	-62.39
9	39995.47	40.69 PK	74	-33.31	-59.73	5.16	-54.57
10	39995.47	28.58 AV	54	-25.42	-71.84	5.16	-66.68

Note: Margin value = Emission Level - Limit value

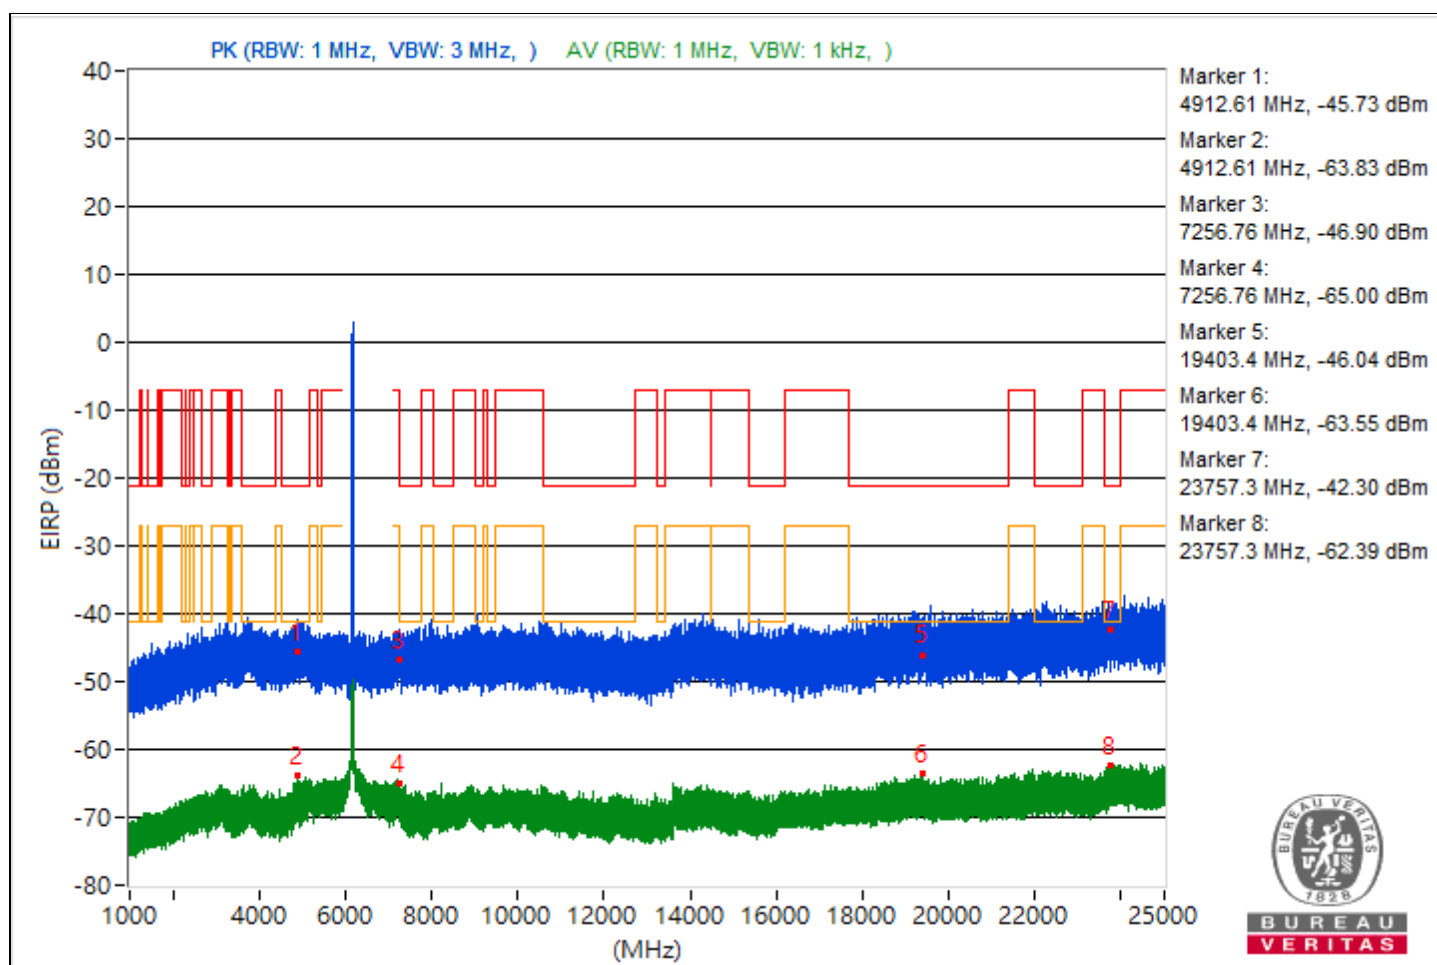


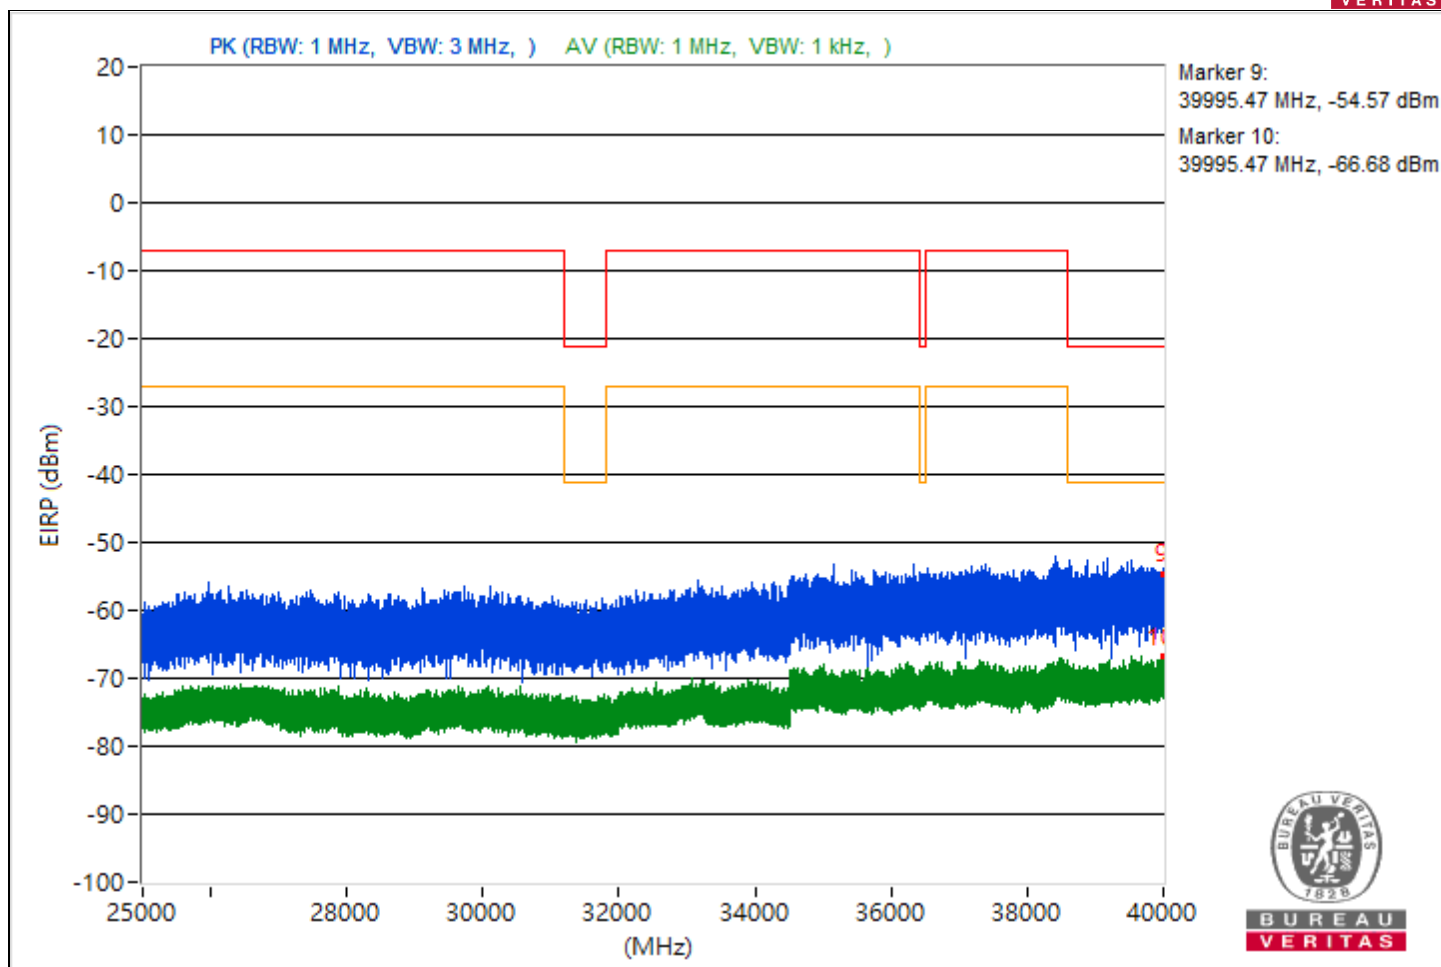


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5144.39	50.15 PK	74	-23.85	-50.27	5.16	-45.11
2	5144.39	30.78 AV	54	-23.22	-69.64	5.16	-64.48
3	7260.49	50.06 PK	74	-23.94	-50.36	5.16	-45.2
4	7260.49	30.37 AV	54	-23.63	-70.05	5.16	-64.89
5	20085.4	48.01 PK	74	-25.99	-52.41	5.16	-47.25
6	20085.4	31.78 AV	54	-22.22	-68.64	5.16	-63.48
7	23911	52.61 PK	74	-21.39	-47.81	5.16	-42.65
8	23911	33.72 AV	54	-20.28	-66.7	5.16	-61.54
9	39603.38	33.96 PK	74	-40.04	-66.46	5.16	-61.3
10	39603.38	28.7 AV	54	-25.3	-71.72	5.16	-66.56

Note: Margin value = Emission Level - Limit value

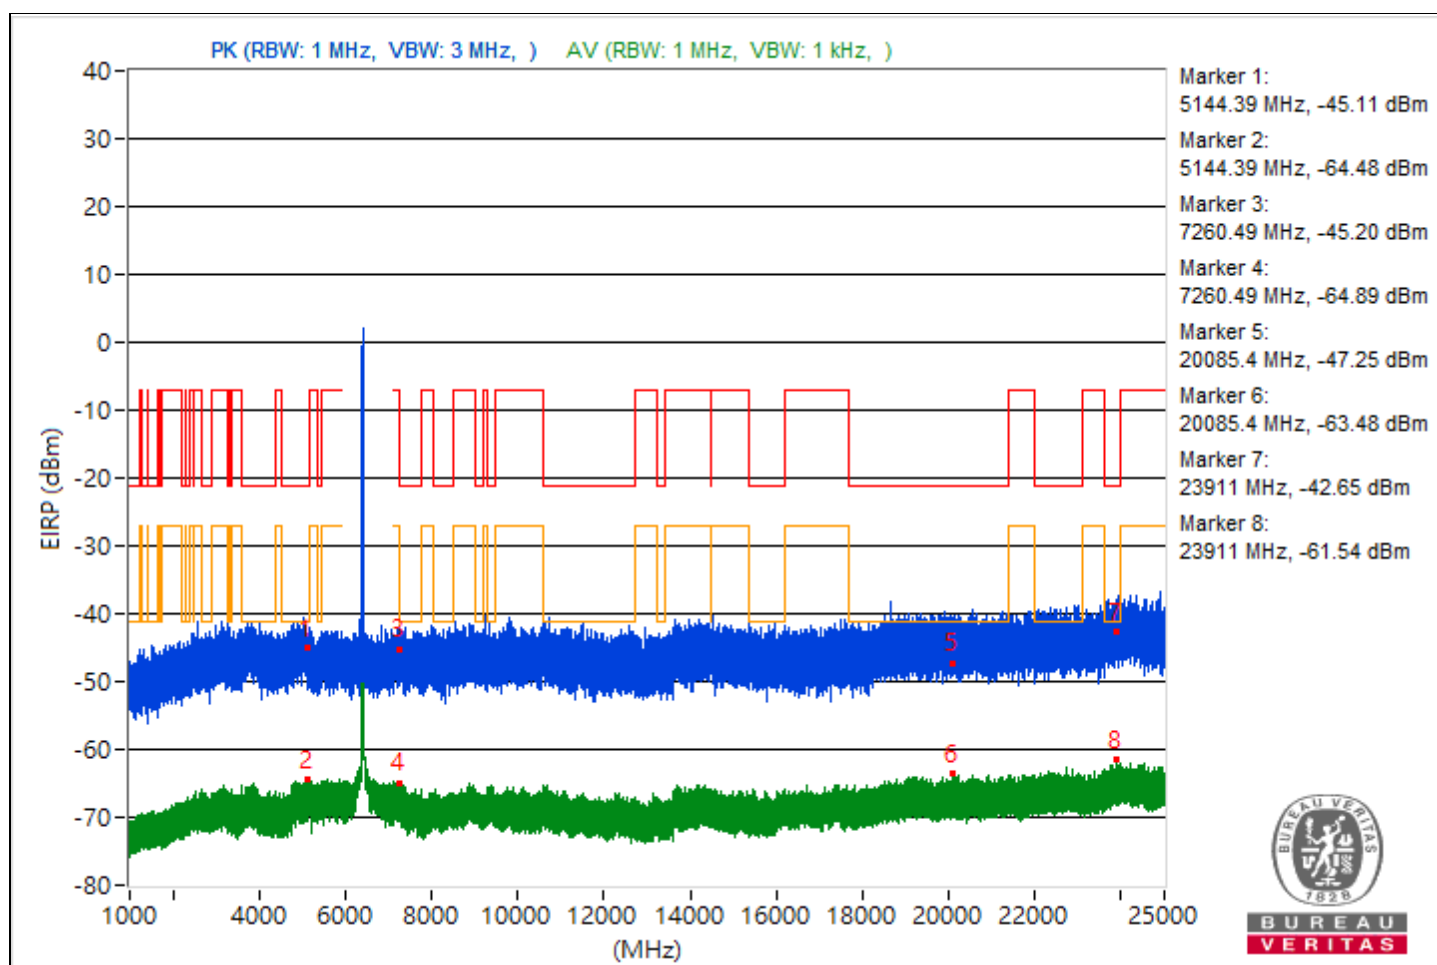


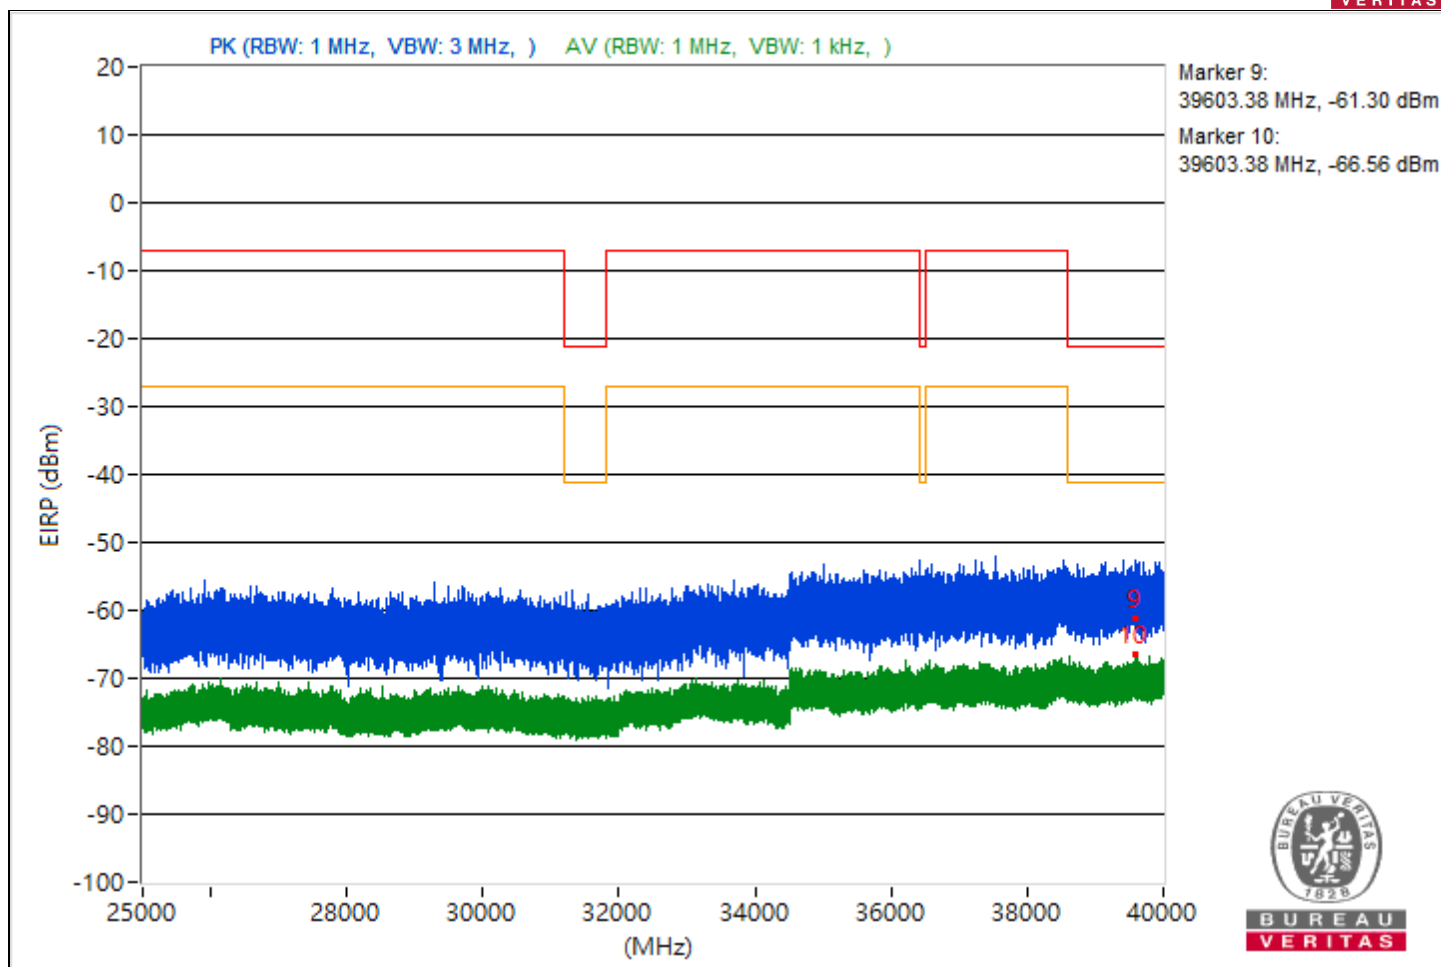


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5094.3	47.1 PK	74	-26.9	-53.32	5.16	-48.16
2	5094.3	31.45 AV	54	-22.55	-68.97	5.16	-63.81
3	7251.16	49.77 PK	74	-24.23	-50.65	5.16	-45.49
4	7251.16	30.56 AV	54	-23.44	-69.86	5.16	-64.7
5	19856.7	50.06 PK	74	-23.94	-50.36	5.16	-45.2
6	19856.7	31.91 AV	54	-22.09	-68.51	5.16	-63.35
7	23934.8	55.37 PK	74	-18.63	-45.05	5.16	-39.89
8	23934.8	33.73 AV	54	-20.27	-66.69	5.16	-61.53
9	39972.98	34.72 PK	74	-39.28	-65.7	5.16	-60.54
10	39972.98	28.54 AV	54	-25.46	-71.88	5.16	-66.72

Note: Margin value = Emission Level - Limit value

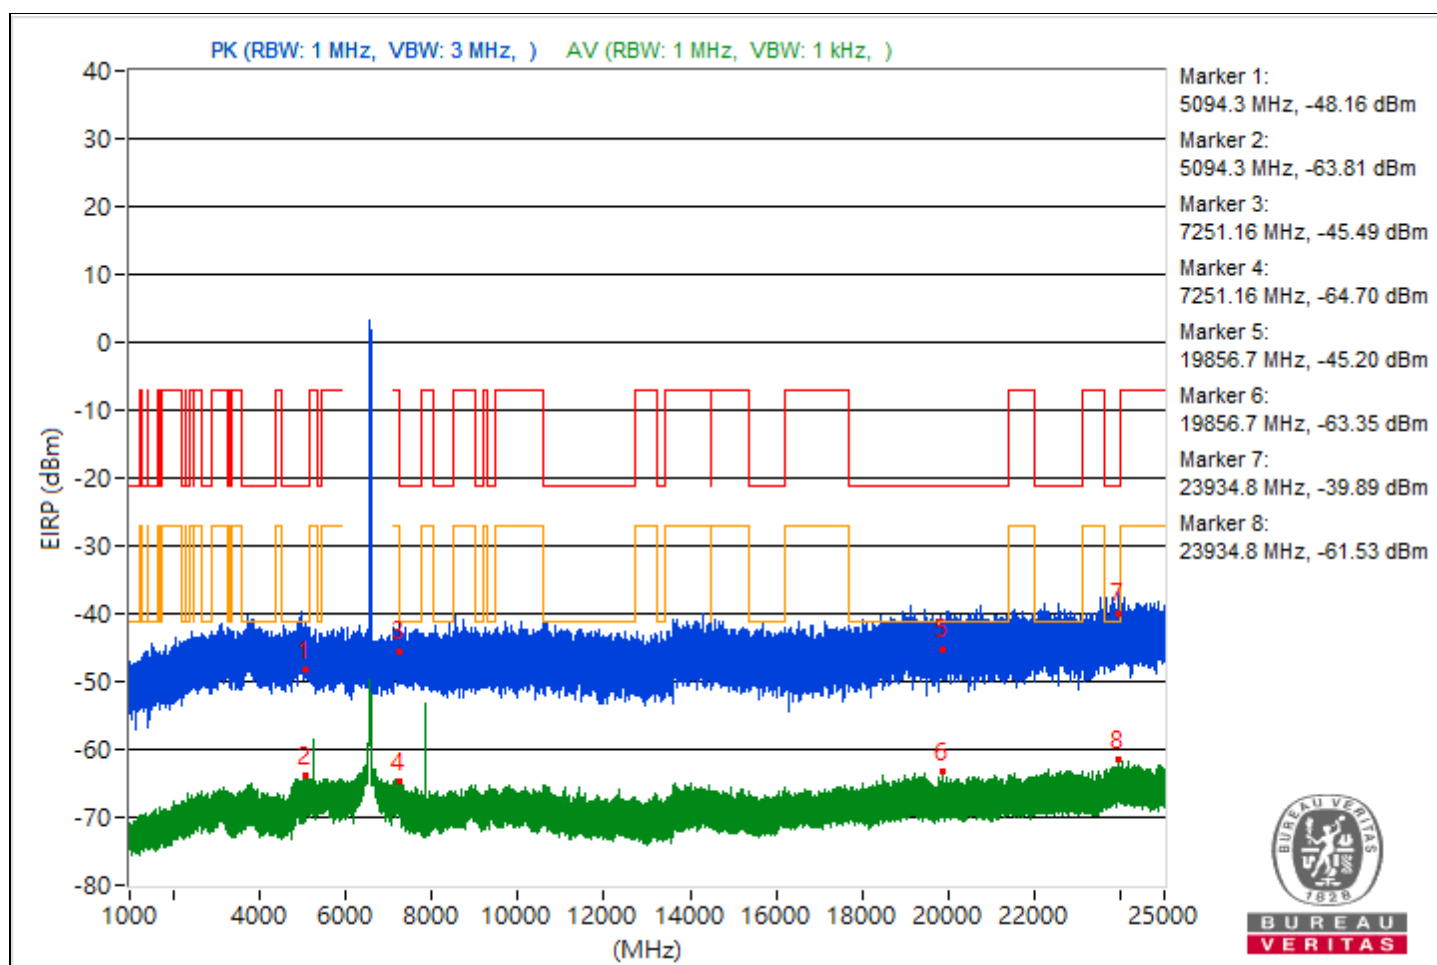


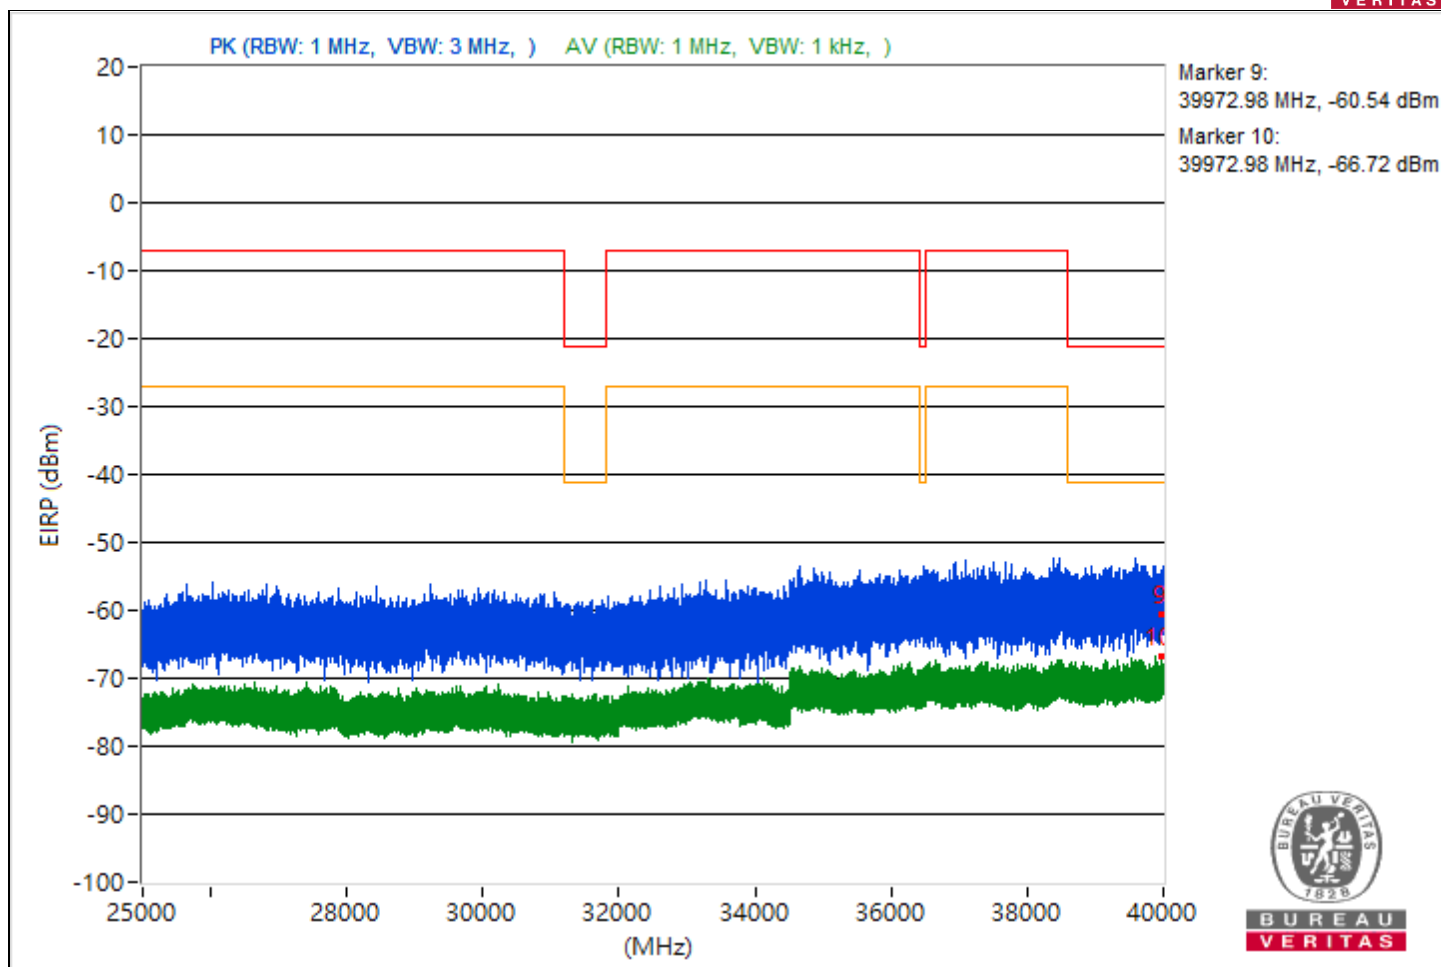


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5139.41	49.46 PK	74	-24.54	-50.96	5.16	-45.8
2	5139.41	30.99 AV	54	-23.01	-69.43	5.16	-64.27
3	10632.8	46.06 PK	74	-27.94	-54.36	5.16	-49.2
4	10632.8	30.59 AV	54	-23.41	-69.83	5.16	-64.67
5	21130.4	52.71 PK	74	-21.29	-47.71	5.16	-42.55
6	21130.4	31.82 AV	54	-22.18	-68.6	5.16	-63.44
7	23865.4	53.34 PK	74	-20.66	-47.08	5.16	-41.92
8	23865.4	32.95 AV	54	-21.05	-67.47	5.16	-62.31
9	38667.2	38.59 PK	74	-35.41	-61.83	5.16	-56.67
10	38667.2	28.01 AV	54	-25.99	-72.41	5.16	-67.25

Note: Margin value = Emission Level - Limit value

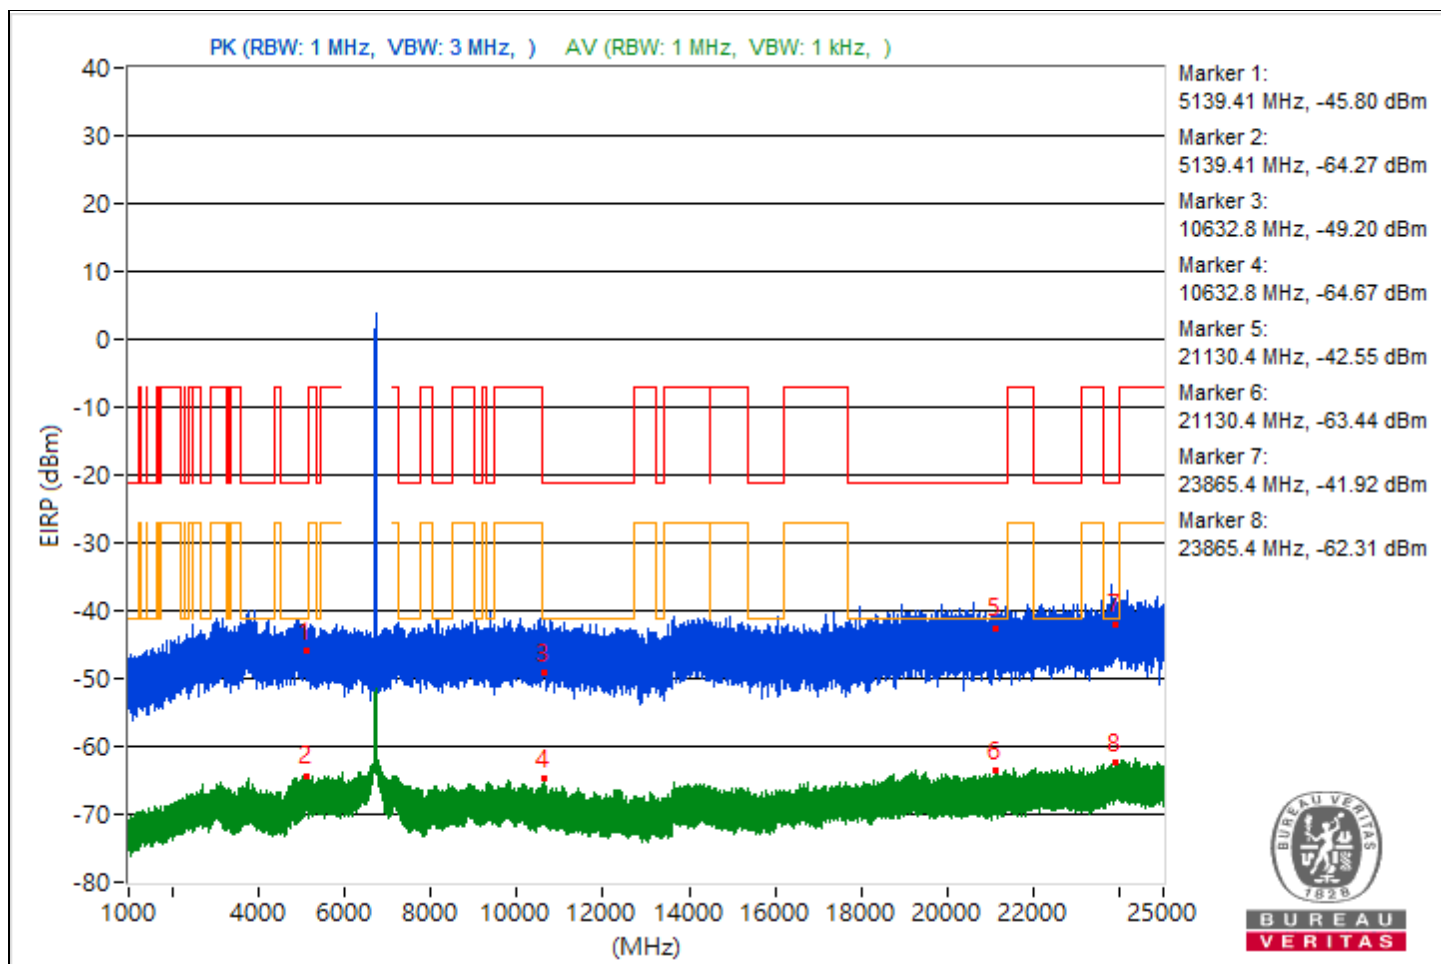


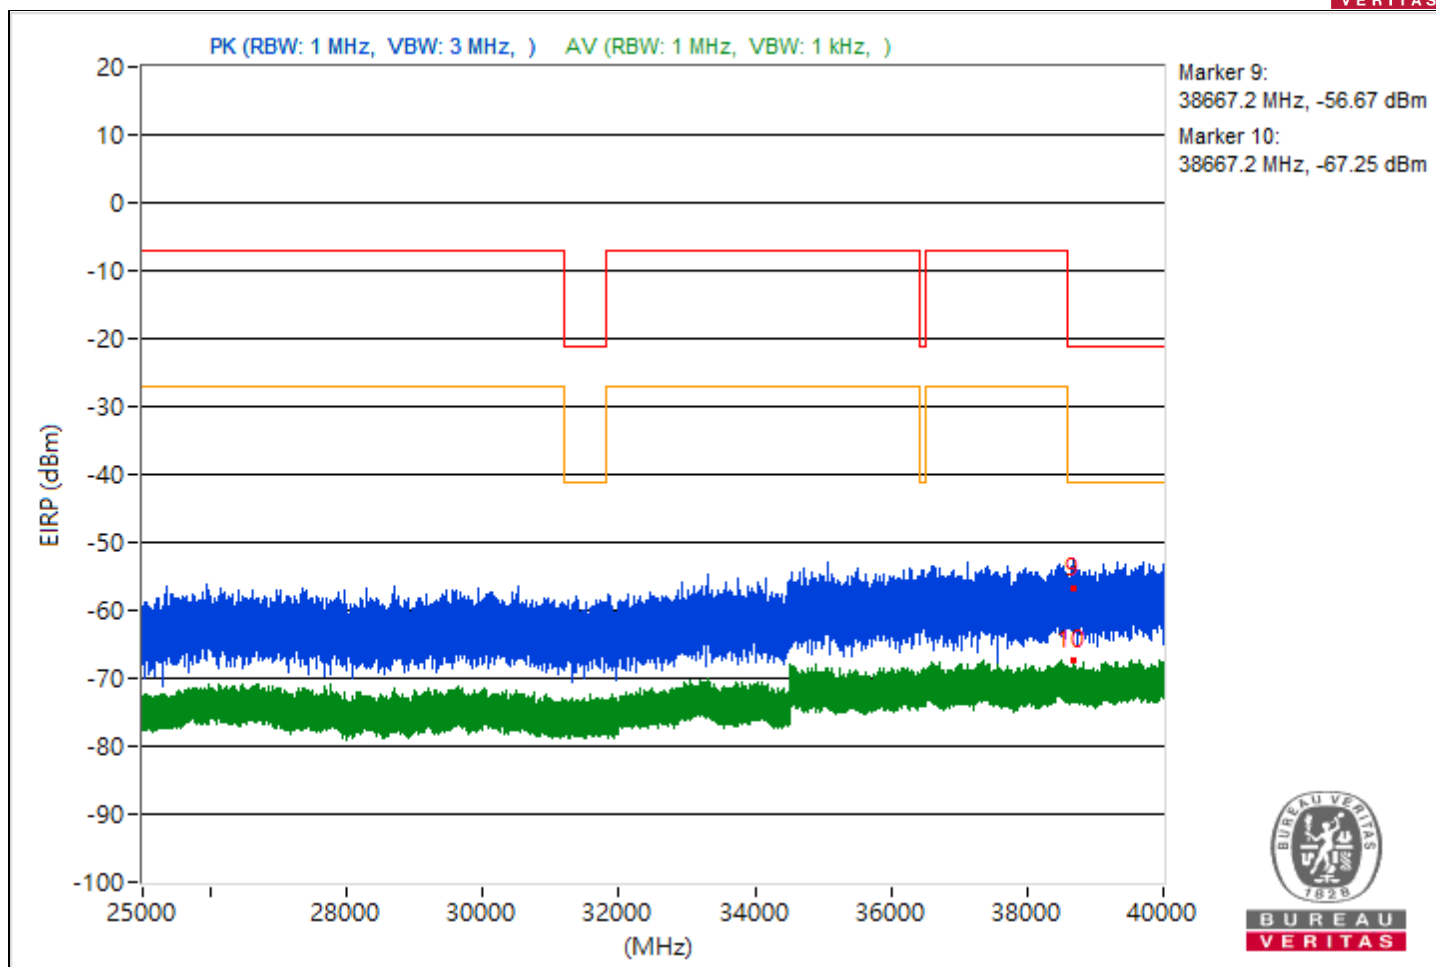


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5130.93	51.28 PK	74	-22.72	-49.14	5.16	-43.98
2	5130.93	31.34 AV	54	-22.66	-69.08	5.16	-63.92
3	7262.36	50.6 PK	74	-23.4	-49.82	5.16	-44.66
4	7262.36	30.84 AV	54	-23.16	-69.58	5.16	-64.42
5	20914.4	51.22 PK	74	-22.78	-49.2	5.16	-44.04
6	20914.4	31.83 AV	54	-22.17	-68.59	5.16	-63.43
7	23980.8	52.73 PK	74	-21.27	-47.69	5.16	-42.53
8	23980.8	32.81 AV	54	-21.19	-67.61	5.16	-62.45
9	39845.42	36.81 PK	74	-37.19	-63.61	5.16	-58.45
10	39845.42	28.45 AV	54	-25.55	-71.97	5.16	-66.81

Note: Margin value = Emission Level - Limit value

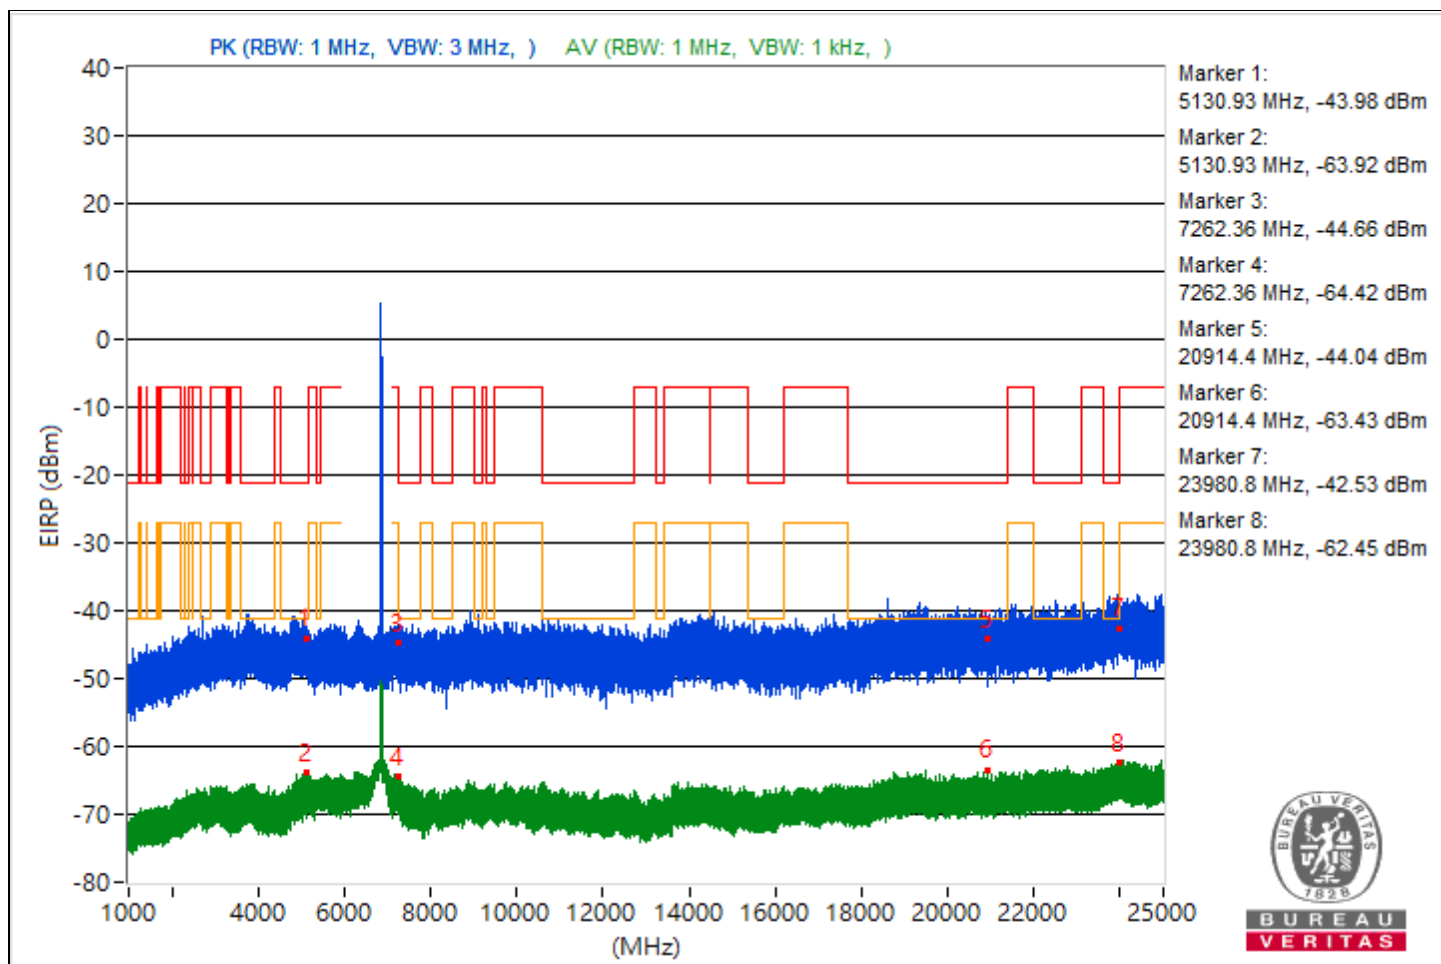


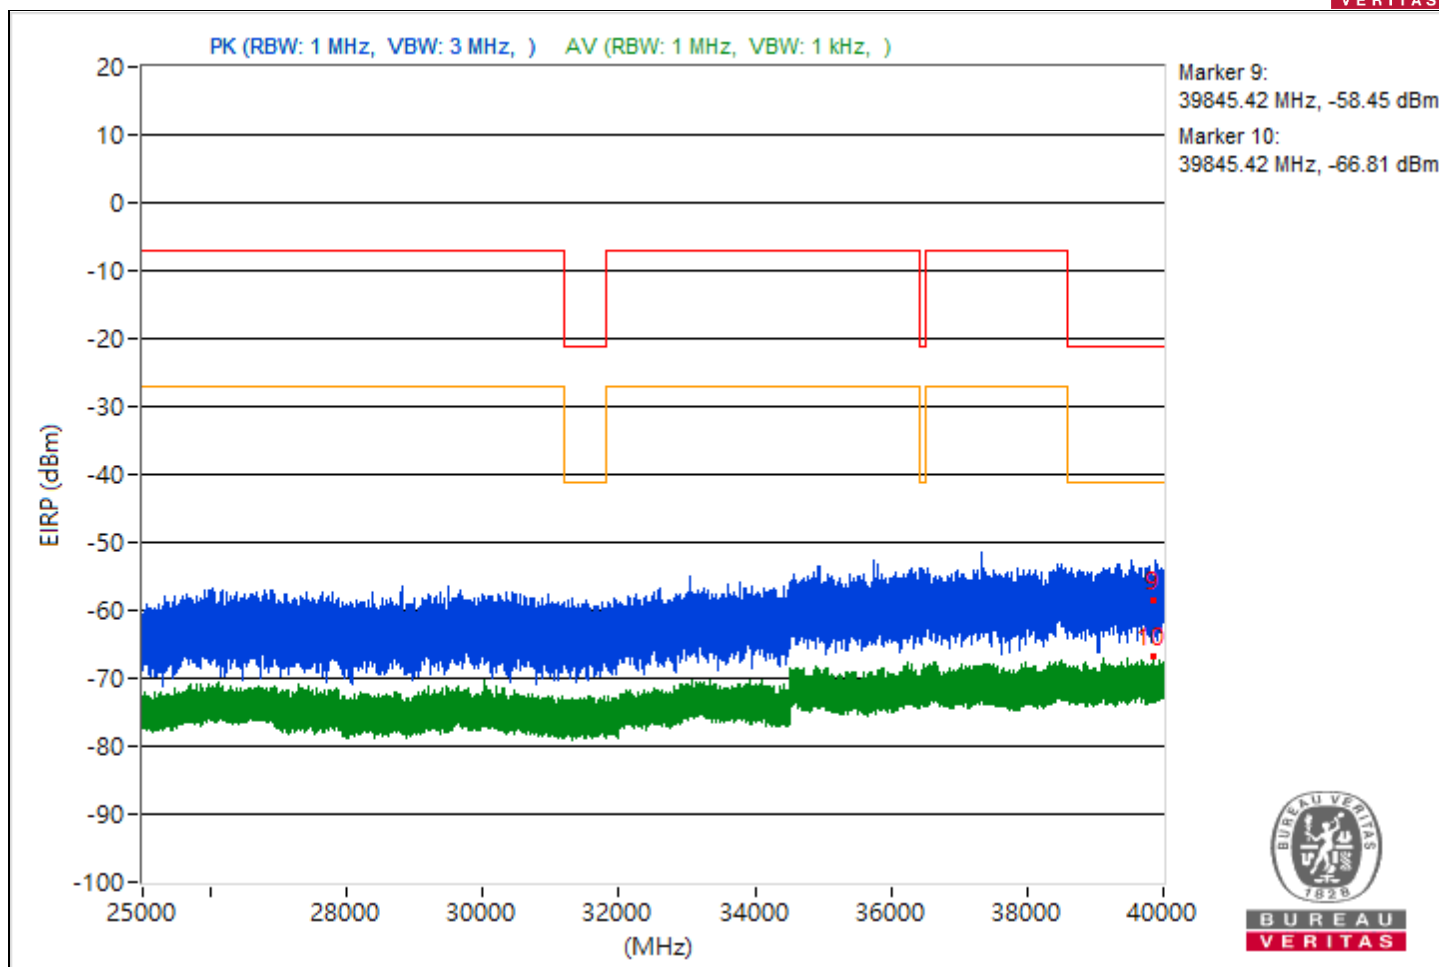


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5119.58	49.12 PK	74	-24.88	-51.3	5.16	-46.14
2	5119.58	32.26 AV	54	-21.74	-68.16	5.16	-63
3	7260.72	48.5 PK	74	-25.5	-51.92	5.16	-46.76
4	7260.72	30.75 AV	54	-23.25	-69.67	5.16	-64.51
5	20711	48.27 PK	74	-25.73	-52.15	5.16	-46.99
6	20711	31.44 AV	54	-22.56	-68.98	5.16	-63.82
7	23977.4	51.6 PK	74	-22.4	-48.82	5.16	-43.66
8	23977.4	33.46 AV	54	-20.54	-66.96	5.16	-61.8
9	39978.4	33.92 PK	74	-40.08	-66.5	5.16	-61.34
10	39978.4	27.84 AV	54	-26.16	-72.58	5.16	-67.42

Note: Margin value = Emission Level - Limit value

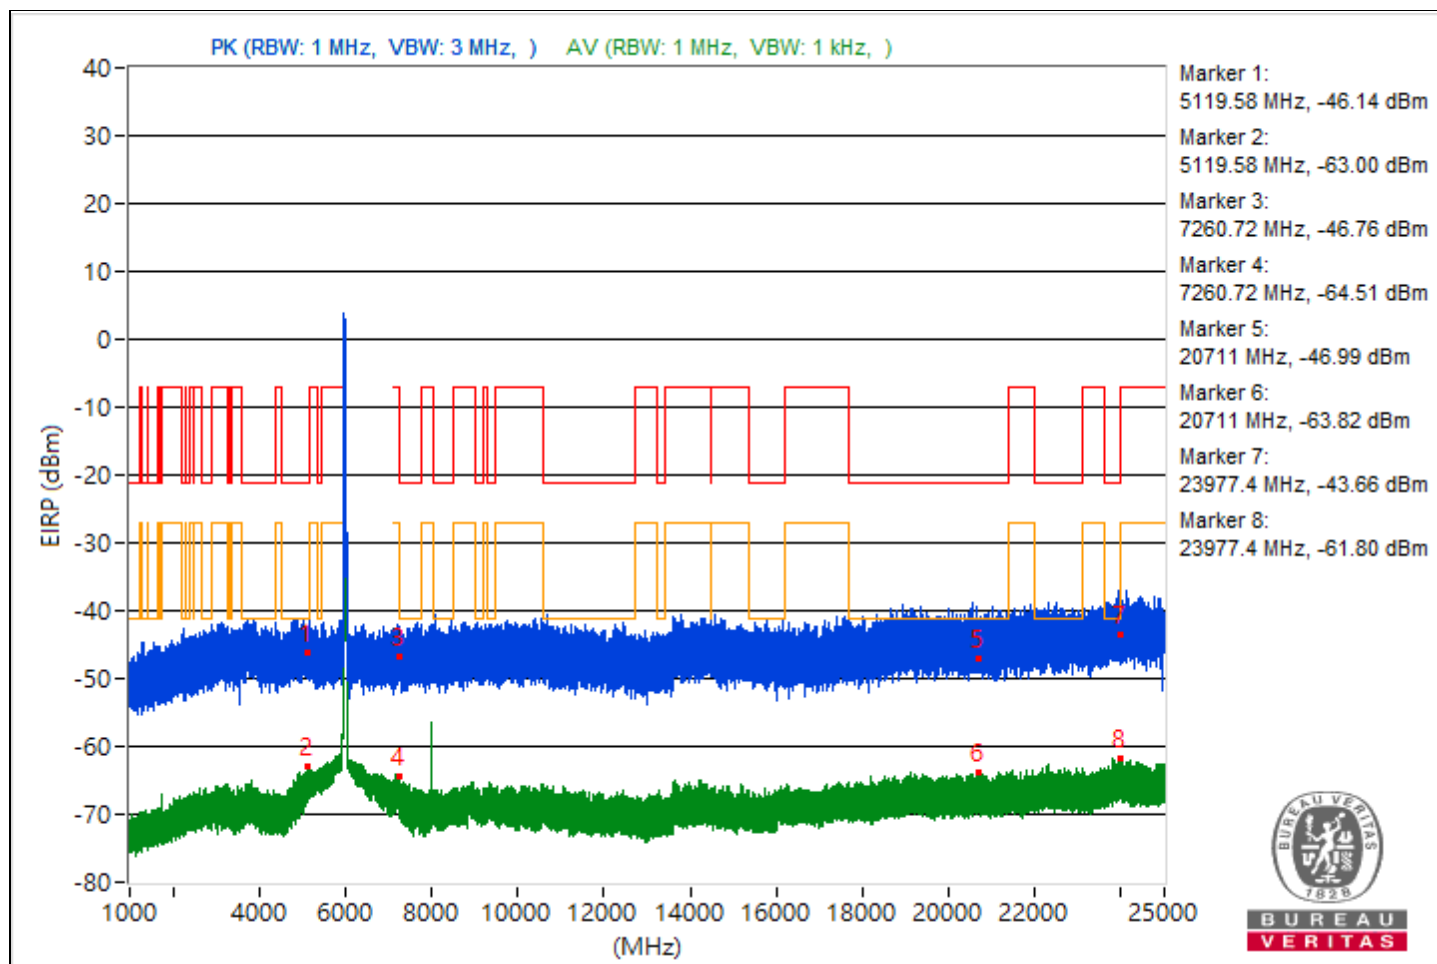


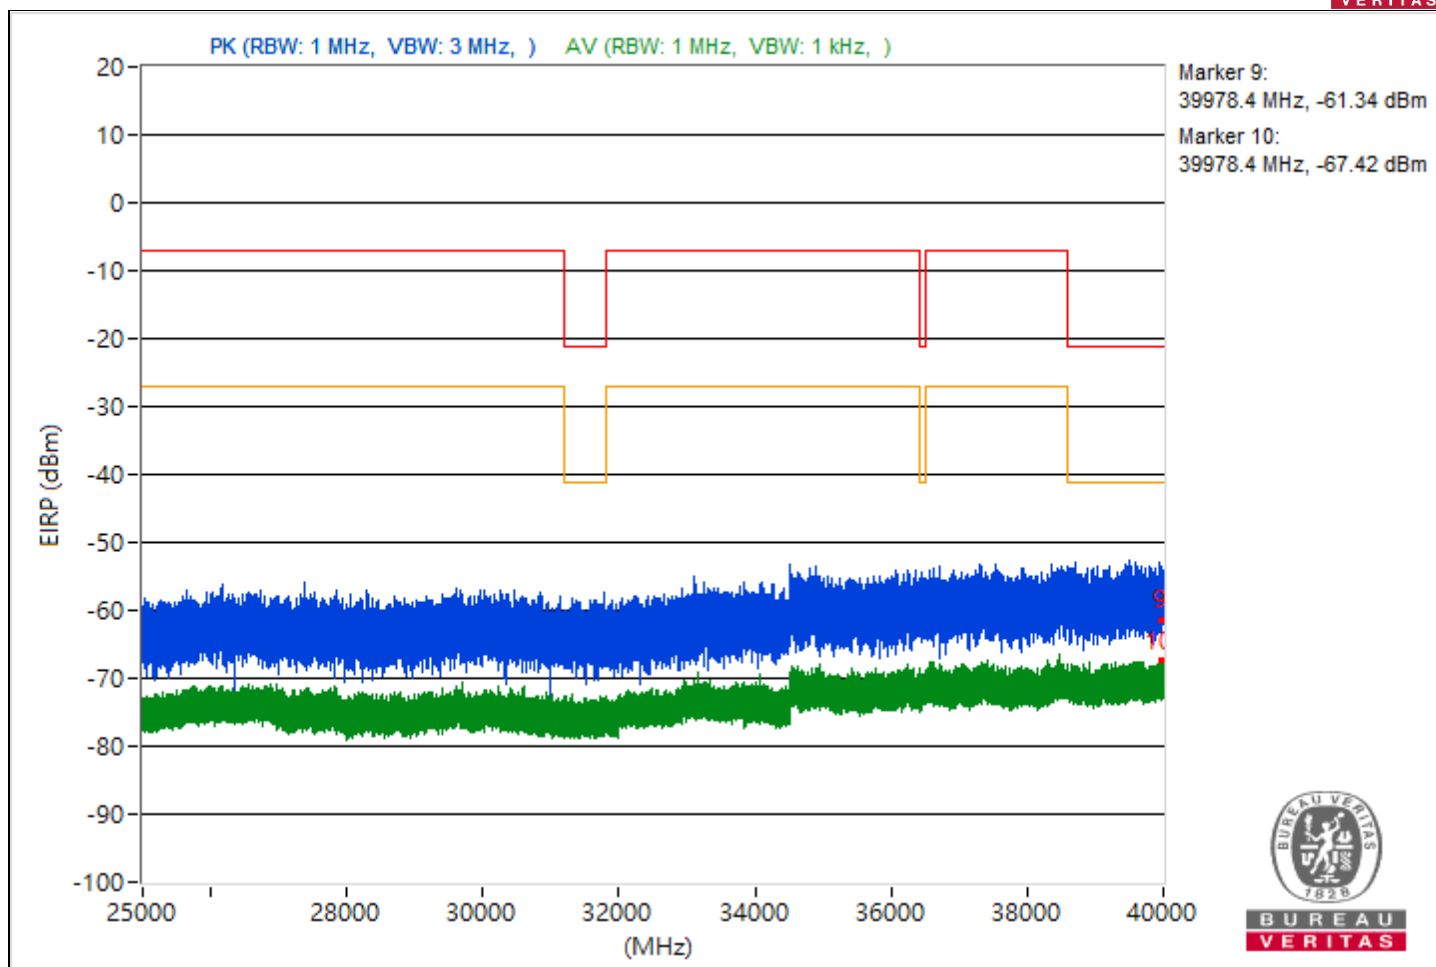


RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5452.47	48.02 PK	74	-25.98	-52.4	5.16	-47.24
2	5452.47	32.06 AV	54	-21.94	-68.36	5.16	-63.2
3	8193.33	49.72 PK	74	-24.28	-50.7	5.16	-45.54
4	8193.33	31.64 AV	54	-22.36	-68.78	5.16	-63.62
5	19129.1	51.64 PK	74	-22.36	-48.78	5.16	-43.62
6	19129.1	31.98 AV	54	-22.02	-68.44	5.16	-63.28
7	23890.1	53.27 PK	74	-20.73	-47.15	5.16	-41.99
8	23890.1	33.37 AV	54	-20.63	-67.05	5.16	-61.89
9	39962.04	36.23 PK	74	-37.77	-64.19	5.16	-59.03
10	39962.04	28.06 AV	54	-25.94	-72.36	5.16	-67.2

Note: Margin value = Emission Level - Limit value

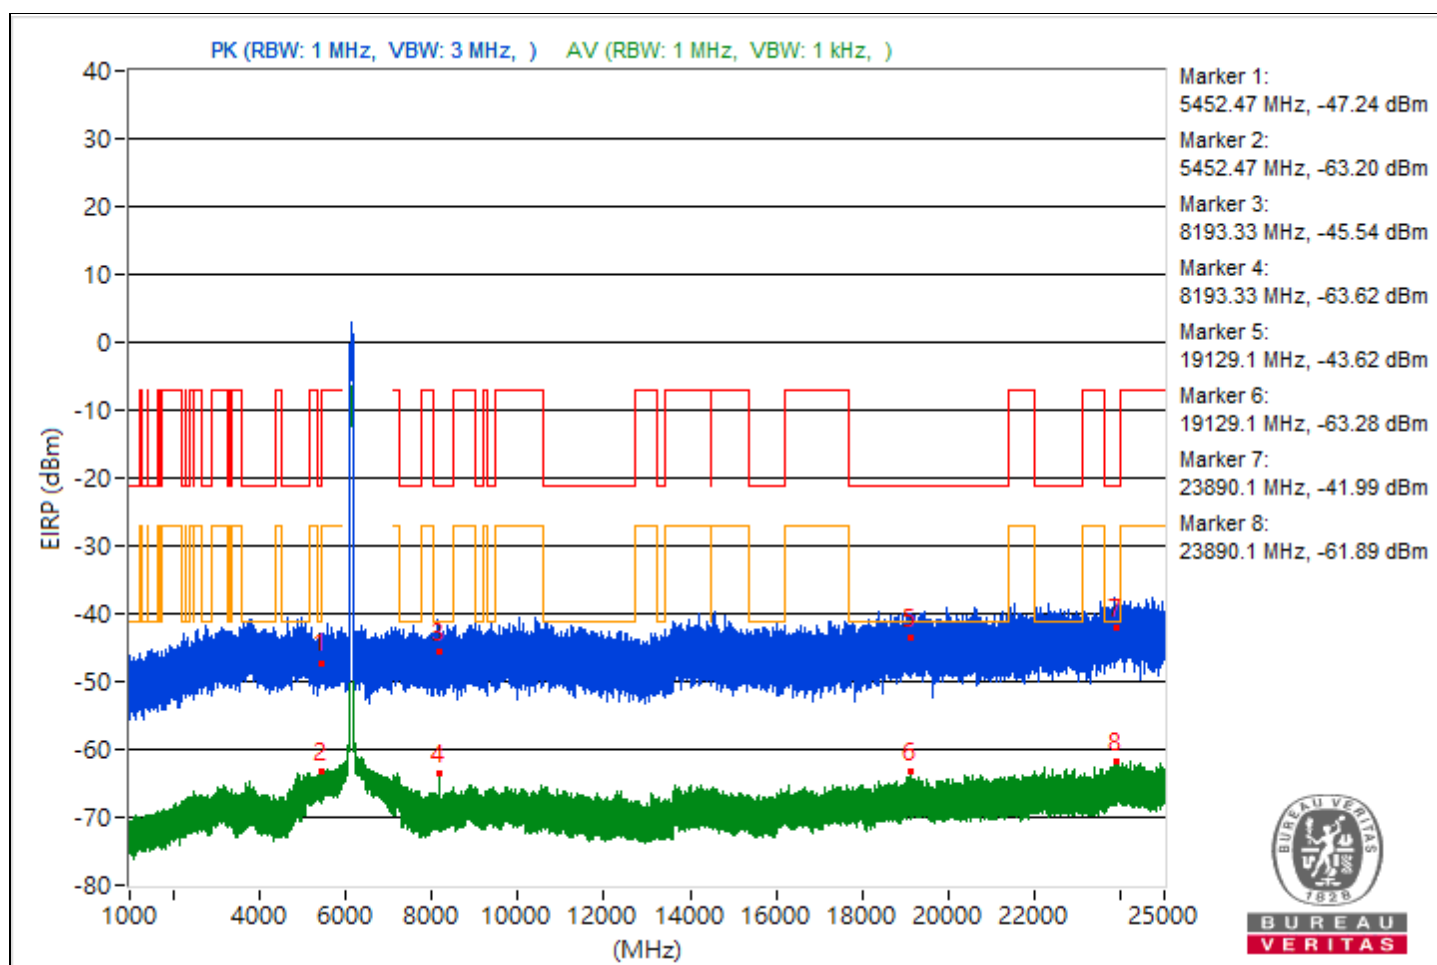


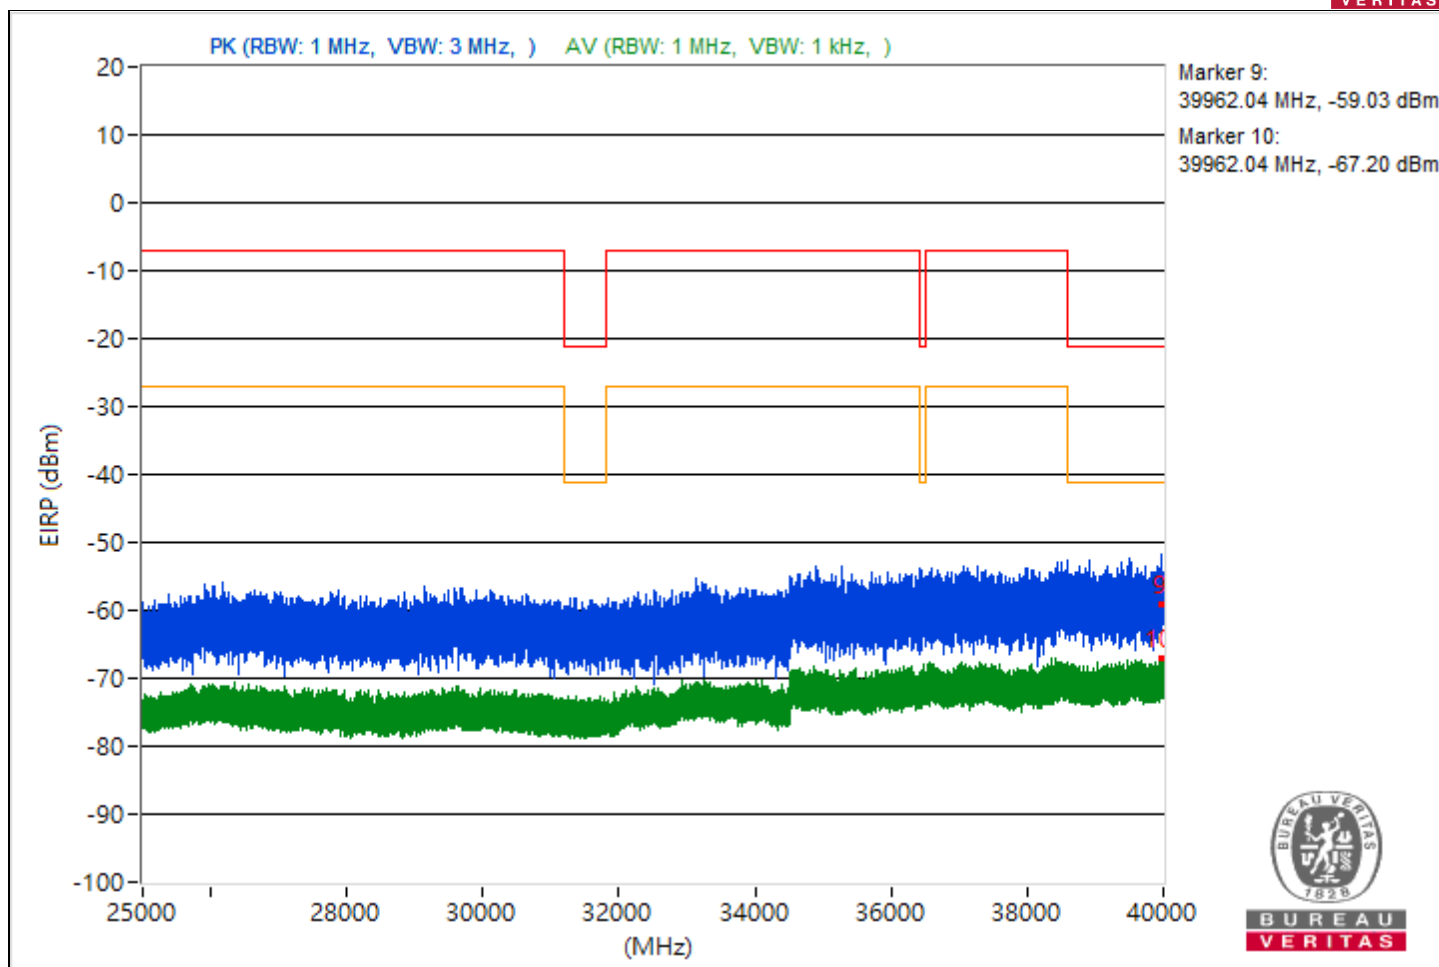


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5109.39	51.79 PK	74	-22.21	-48.63	5.16	-43.47
2	5109.39	31.6 AV	54	-22.4	-68.82	5.16	-63.66
3	7258.16	50.81 PK	74	-23.19	-49.61	5.16	-44.45
4	7258.16	30.89 AV	54	-23.11	-69.53	5.16	-64.37
5	19113.6	50.25 PK	74	-23.75	-50.17	5.16	-45.01
6	19113.6	31.74 AV	54	-22.26	-68.68	5.16	-63.52
7	23876.9	50.88 PK	74	-23.12	-49.54	5.16	-44.38
8	23876.9	33.66 AV	54	-20.34	-66.76	5.16	-61.6
9	39700.53	38.51 PK	74	-35.49	-61.91	5.16	-56.75
10	39700.53	28.24 AV	54	-25.76	-72.18	5.16	-67.02

Note: Margin value = Emission Level - Limit value

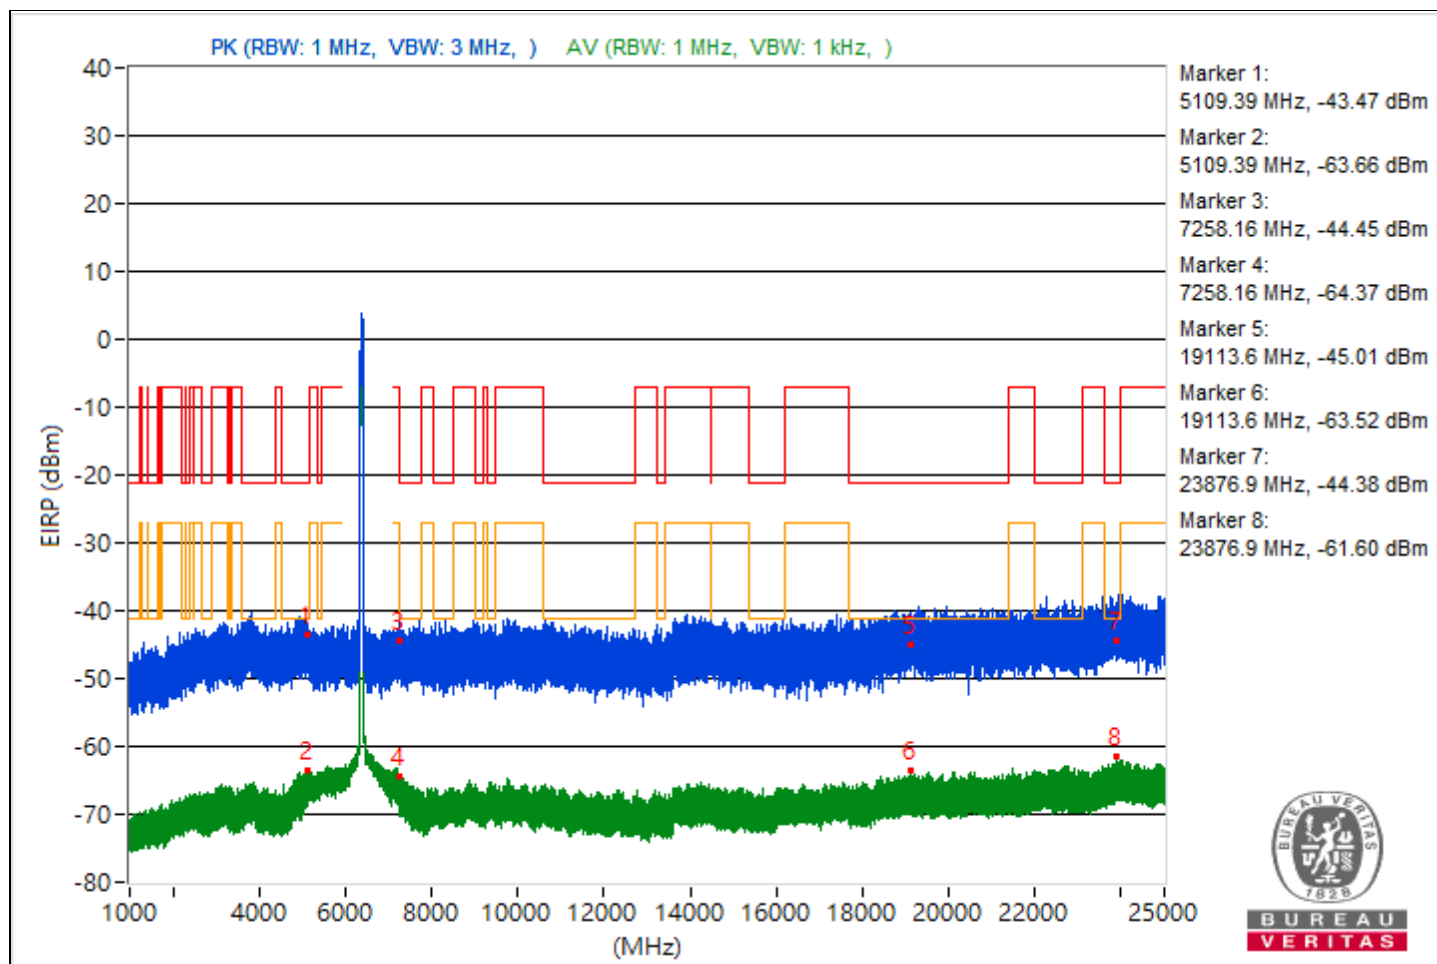


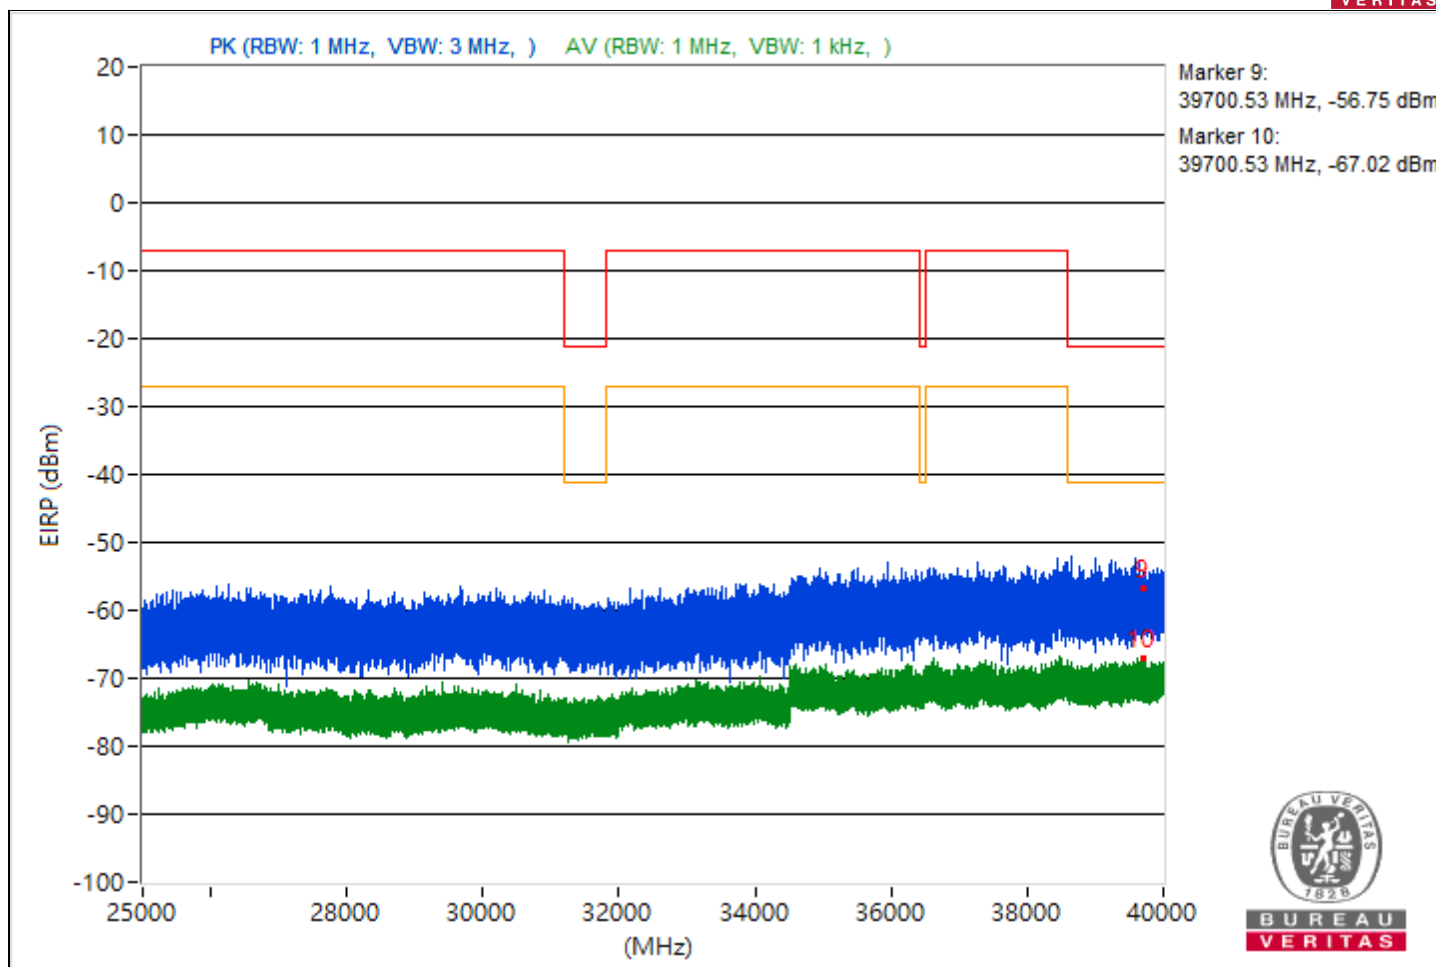


RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4893.09	49.81 PK	74	-24.19	-50.61	5.16	-45.45
2	4893.09	31.58 AV	54	-22.42	-68.84	5.16	-63.68
3	7280.71	47.37 PK	74	-26.63	-53.05	5.16	-47.89
4	7280.71	30.66 AV	54	-23.34	-69.76	5.16	-64.6
5	21385.6	51.43 PK	74	-22.57	-48.99	5.16	-43.83
6	21385.6	32.13 AV	54	-21.87	-68.29	5.16	-63.13
7	23953.9	56.19 PK	74	-17.81	-44.23	5.16	-39.07
8	23953.9	33.72 AV	54	-20.28	-66.7	5.16	-61.54
9	39576.44	35.98 PK	74	-38.02	-64.44	5.16	-59.28
10	39576.44	28.32 AV	54	-25.68	-72.1	5.16	-66.94

Note: Margin value = Emission Level - Limit value

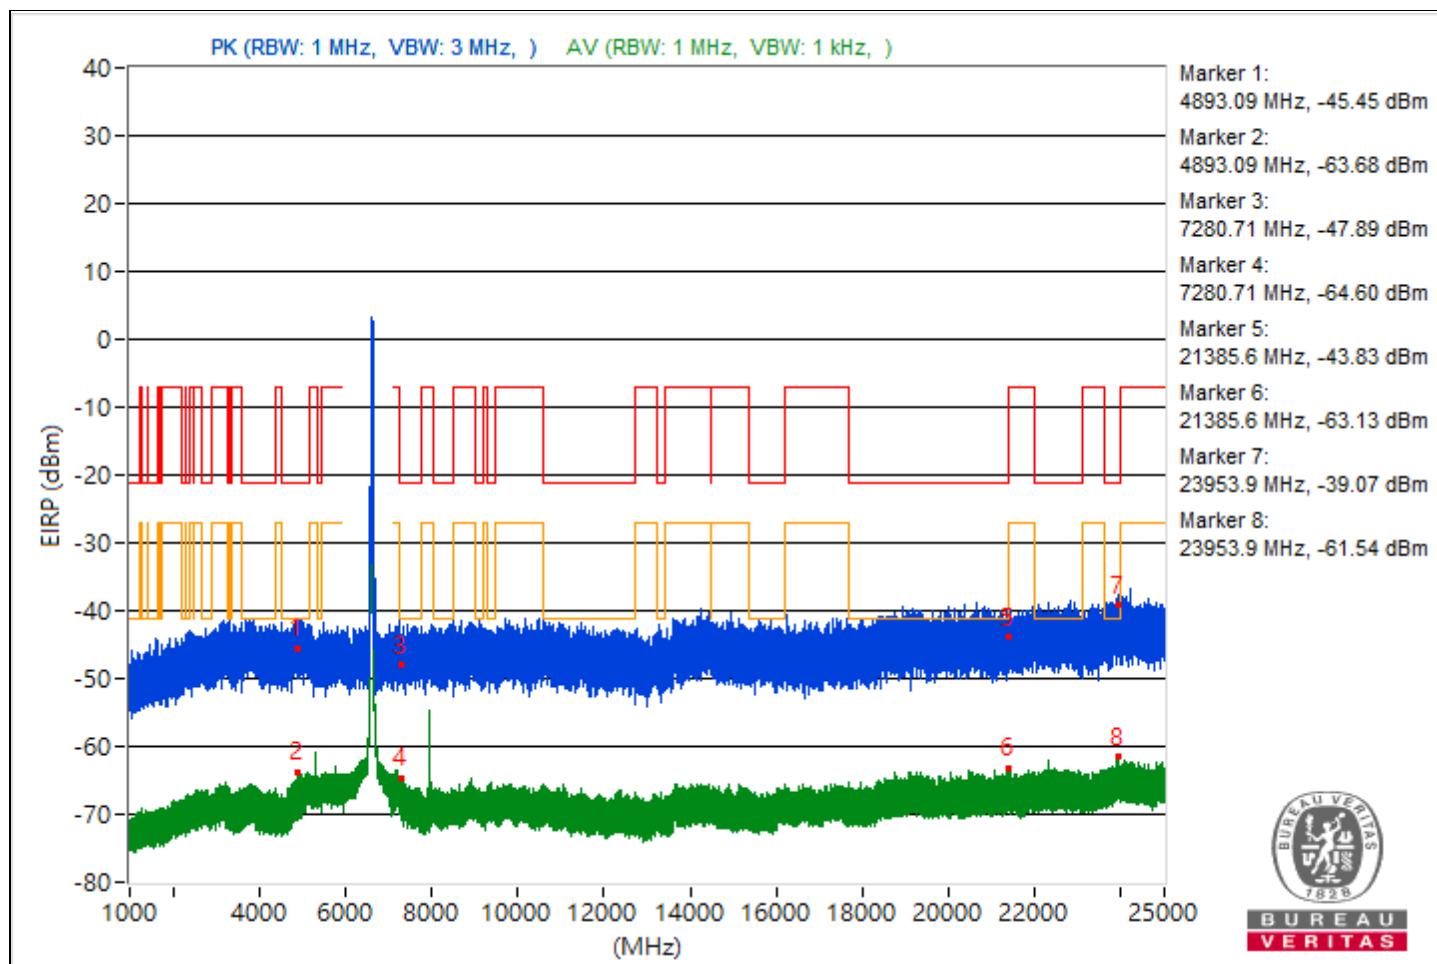


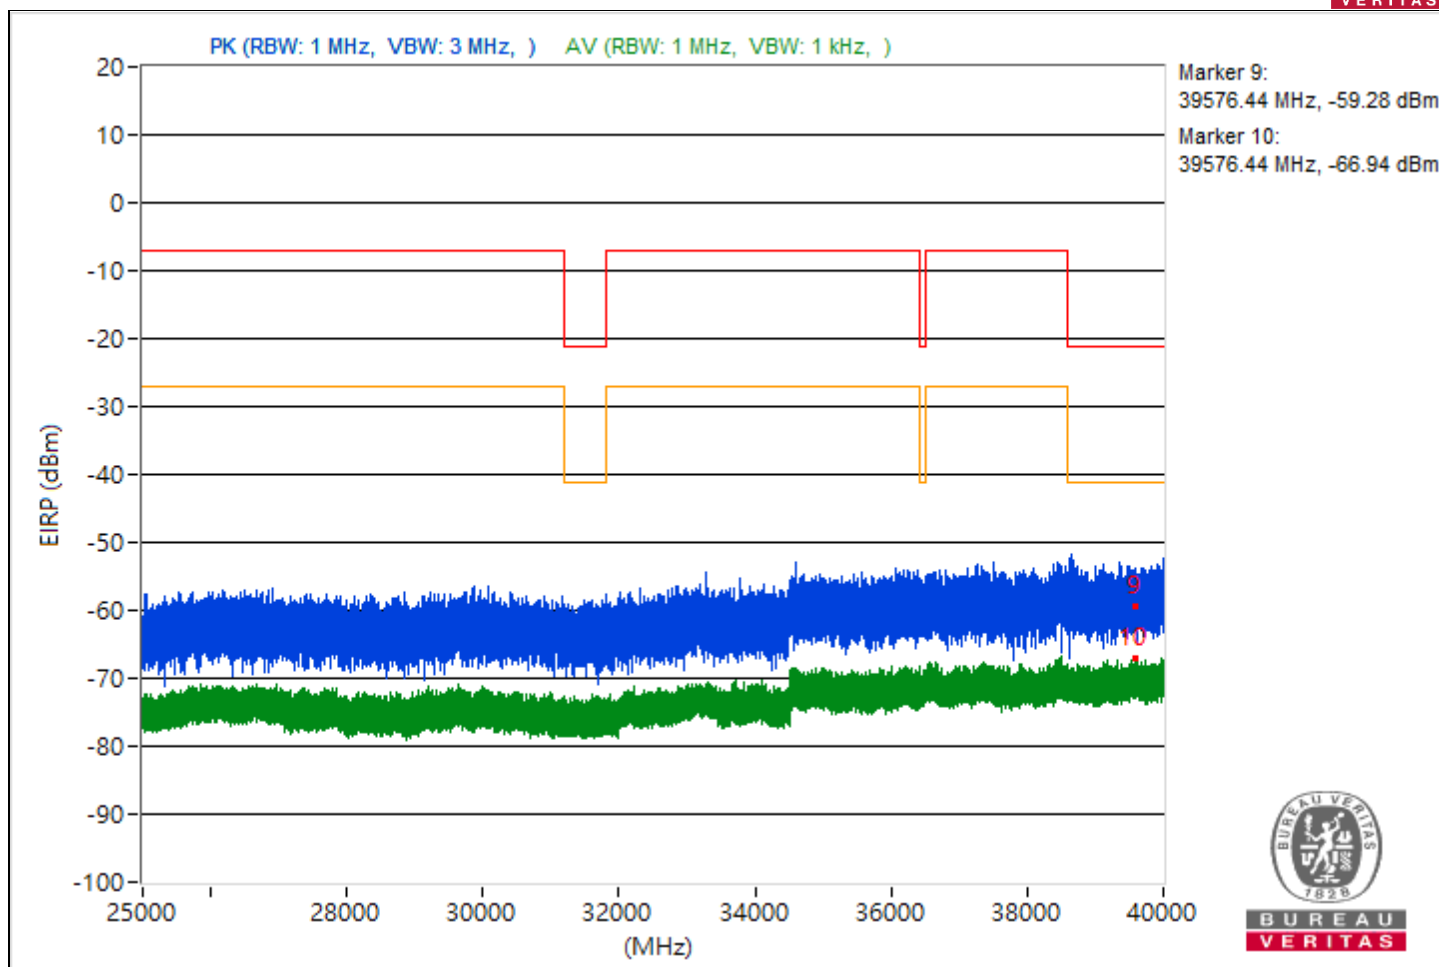


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5136.14	48.2 PK	74	-25.8	-52.22	5.16	-47.06
2	5136.14	31.11 AV	54	-22.89	-69.31	5.16	-64.15
3	7269.74	49.36 PK	74	-24.64	-51.06	5.16	-45.9
4	7269.74	30.98 AV	54	-23.02	-69.44	5.16	-64.28
5	19419.6	52.29 PK	74	-21.71	-48.13	5.16	-42.97
6	19419.6	31.72 AV	54	-22.28	-68.7	5.16	-63.54
7	23859.7	51.65 PK	74	-22.35	-48.77	5.16	-43.61
8	23859.7	33.05 AV	54	-20.95	-67.37	5.16	-62.21
9	38672.89	37.04 PK	74	-36.96	-63.38	5.16	-58.22
10	38672.89	28.11 AV	54	-25.89	-72.31	5.16	-67.15

Note: Margin value = Emission Level - Limit value

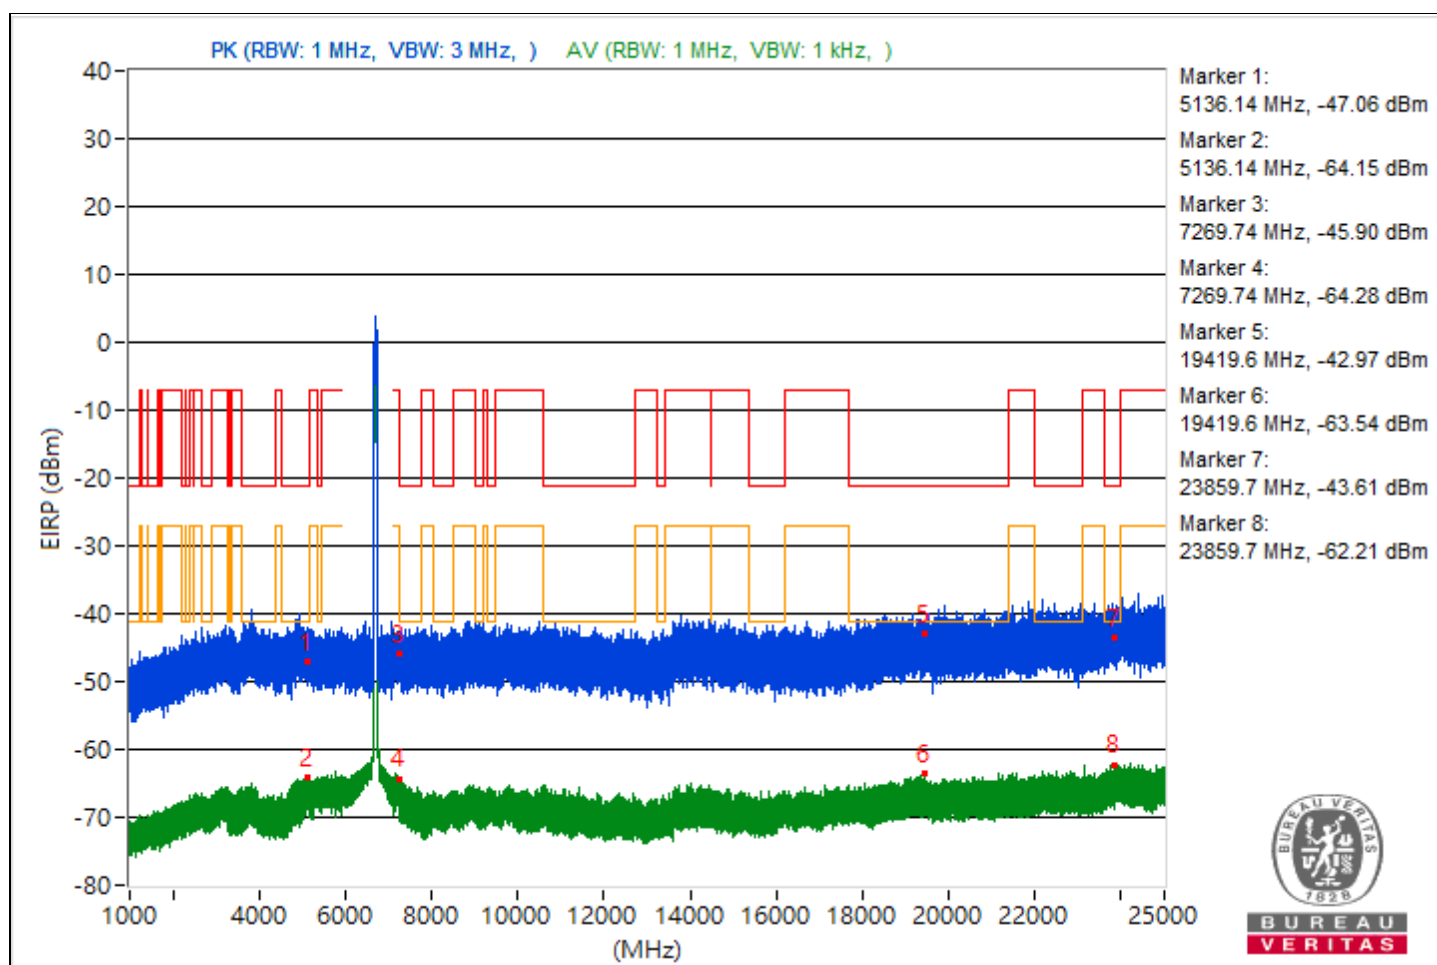


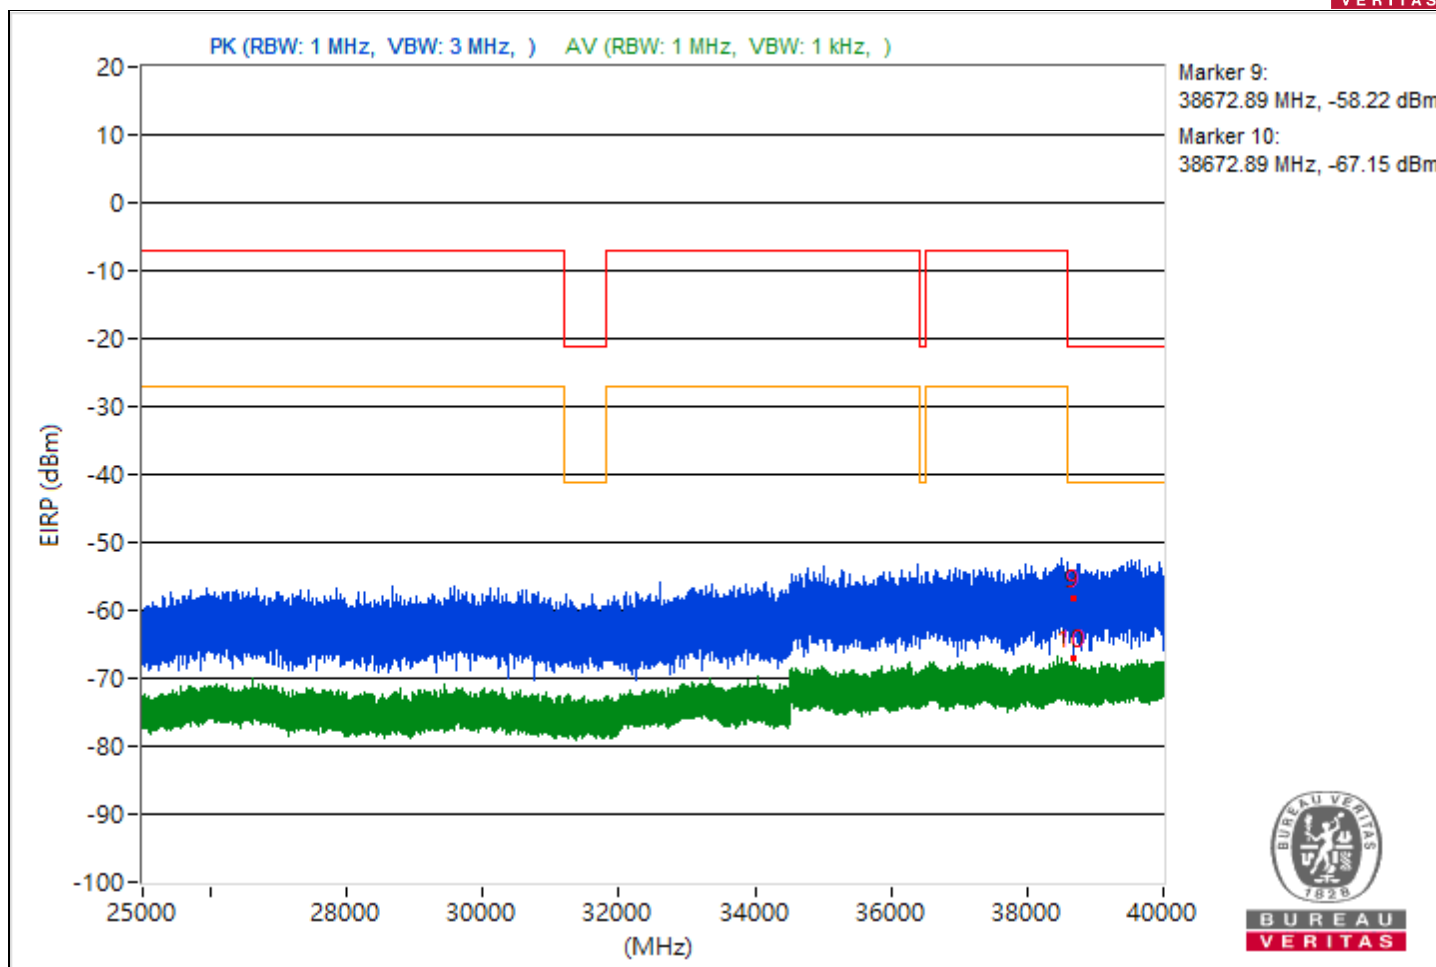


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5058.68	50.35 PK	74	-23.65	-50.07	5.16	-44.91
2	5058.68	31.4 AV	54	-22.6	-69.02	5.16	-63.86
3	7254.58	47.29 PK	74	-26.71	-53.13	5.16	-47.97
4	7254.58	31.06 AV	54	-22.94	-69.36	5.16	-64.2
5	19422.2	49.35 PK	74	-24.65	-51.07	5.16	-45.91
6	19422.2	31.66 AV	54	-22.34	-68.76	5.16	-63.6
7	23959.2	51.05 PK	74	-22.95	-49.37	5.16	-44.21
8	23959.2	33.36 AV	54	-20.64	-67.06	5.16	-61.9
9	39986.4	37.65 PK	74	-36.35	-62.77	5.16	-57.61
10	39986.4	28.71 AV	54	-25.29	-71.71	5.16	-66.55

Note: Margin value = Emission Level - Limit value

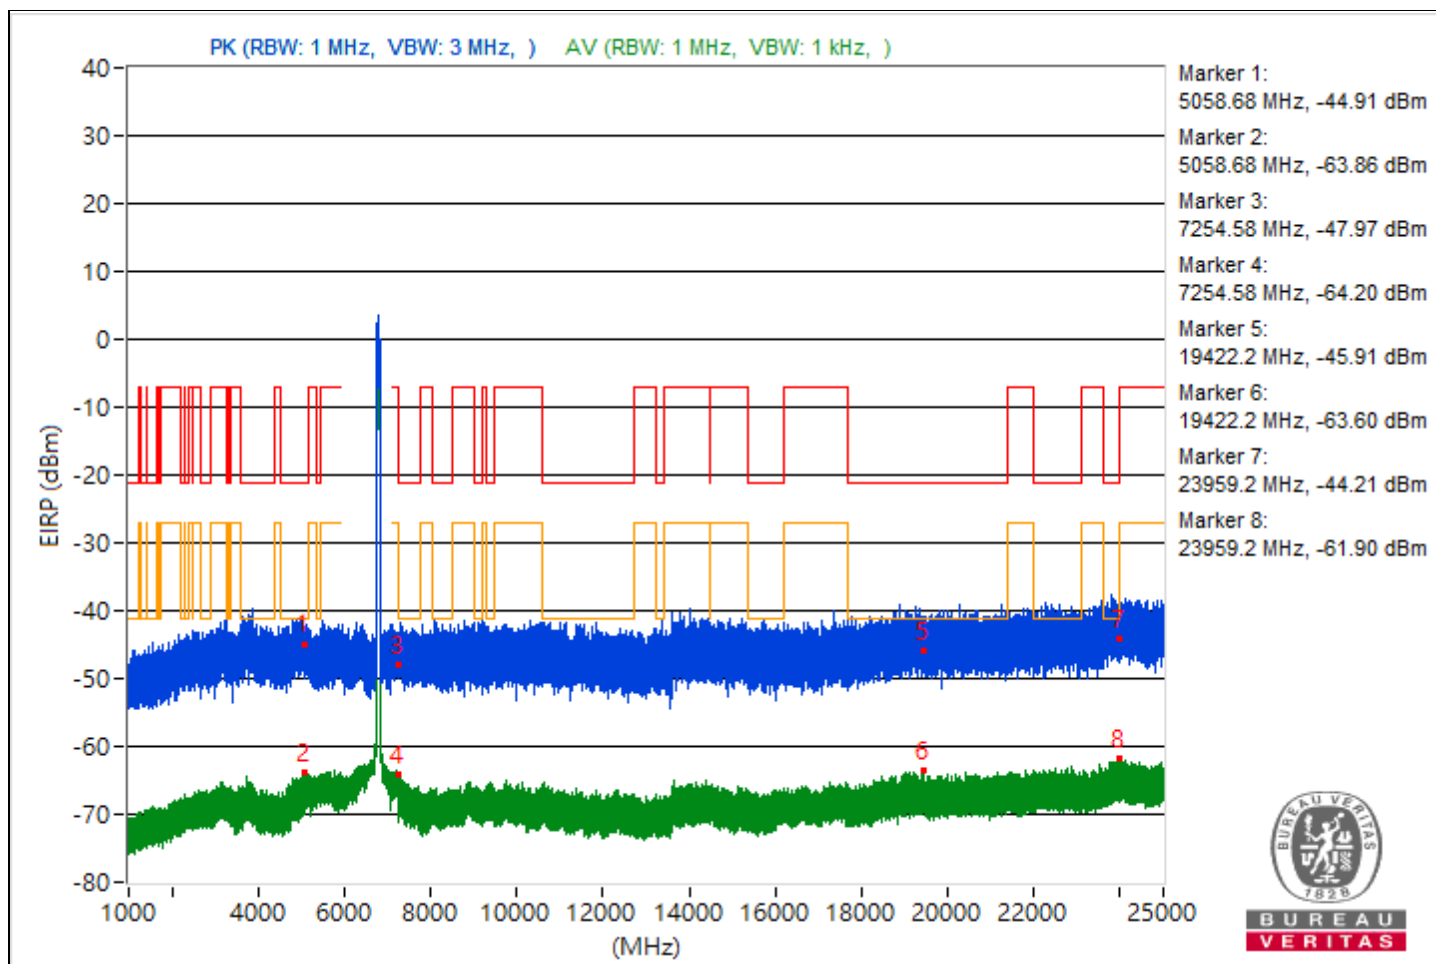


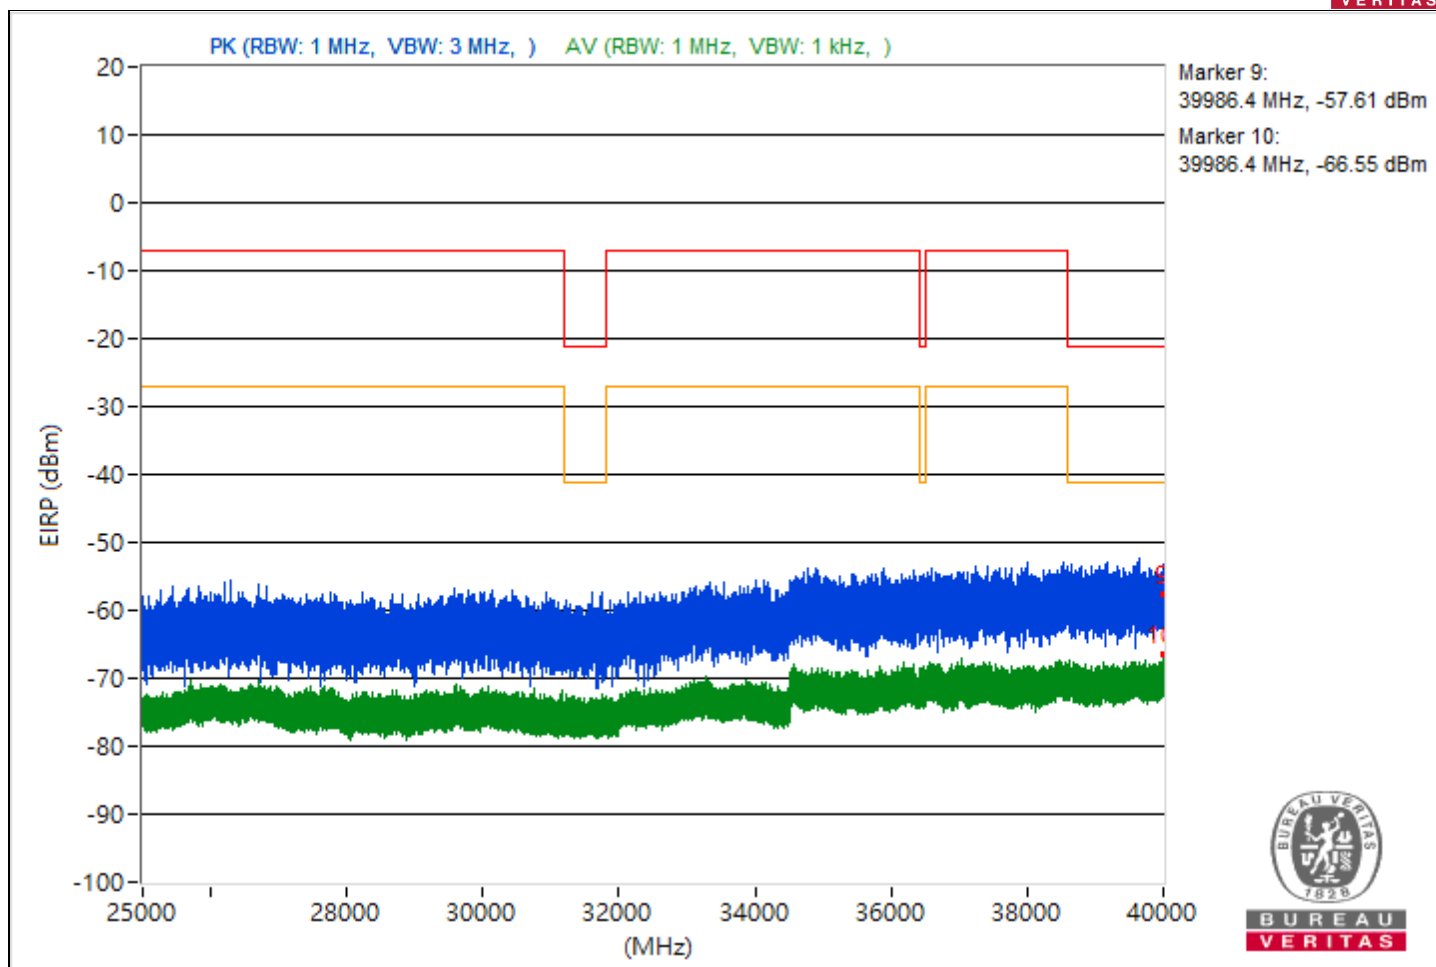


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5436.13	44.42 PK	74	-29.58	-56	5.16	-50.84
2	5436.13	32.42 AV	54	-21.58	-68	5.16	-62.84
3	8033.42	52.22 PK	74	-21.78	-48.2	5.16	-43.04
4	8033.42	36.97 AV	54	-17.03	-63.45	5.16	-58.29
5	19255	50.54 PK	74	-23.46	-49.88	5.16	-44.72
6	19255	31.41 AV	54	-22.59	-69.01	5.16	-63.85
7	23842.6	52.93 PK	74	-21.07	-47.49	5.16	-42.33
8	23842.6	33.3 AV	54	-20.7	-67.12	5.16	-61.96
9	39604.8	34.65 PK	74	-39.35	-65.77	5.16	-60.61
10	39604.8	28.21 AV	54	-25.79	-72.21	5.16	-67.05

Note: Margin value = Emission Level - Limit value

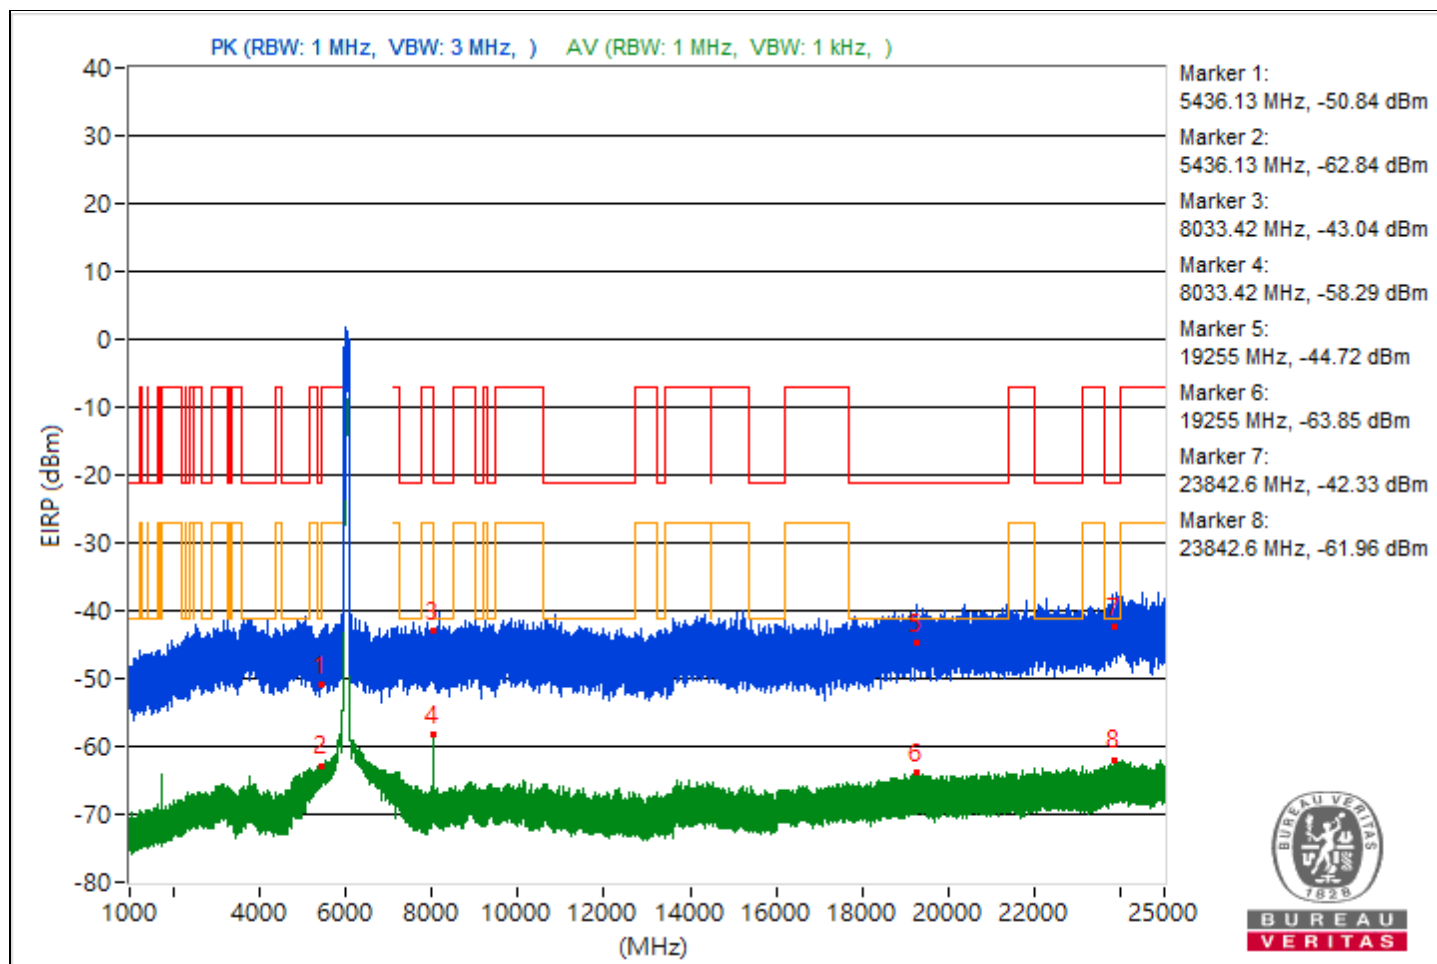


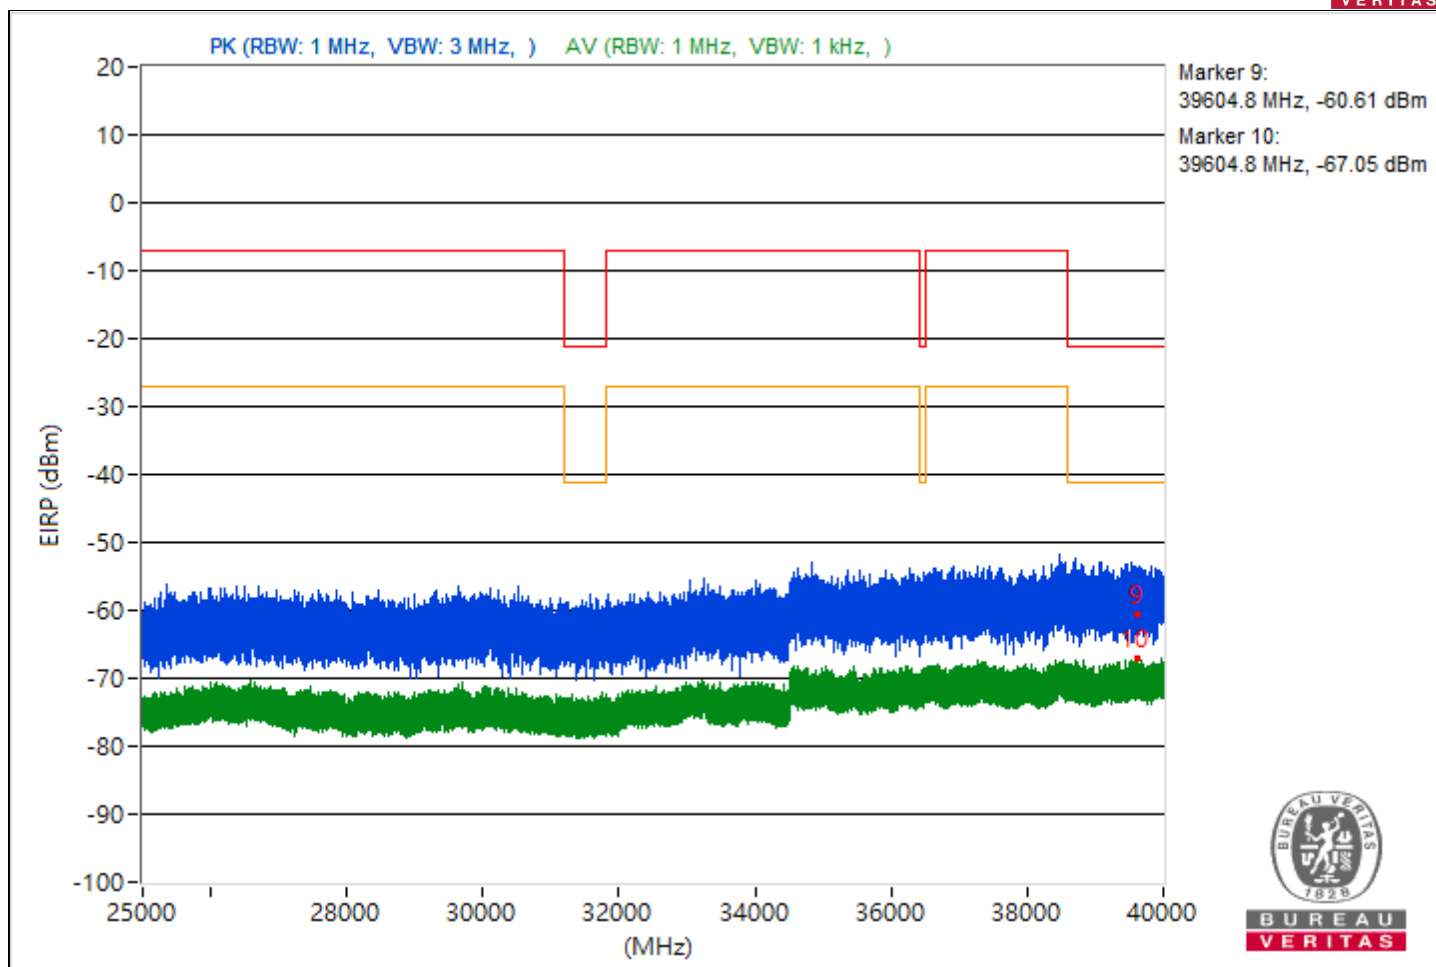


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5452.54	50.45 PK	74	-23.55	-49.97	5.16	-44.81
2	5452.54	32.68 AV	54	-21.32	-67.74	5.16	-62.58
3	7263.37	49.72 PK	74	-24.28	-50.7	5.16	-45.54
4	7263.37	31.58 AV	54	-22.42	-68.84	5.16	-63.68
5	19325.7	49.65 PK	74	-24.35	-50.77	5.16	-45.61
6	19325.7	31.6 AV	54	-22.4	-68.82	5.16	-63.66
7	23790	53.83 PK	74	-20.17	-46.59	5.16	-41.43
8	23790	33.54 AV	54	-20.46	-66.88	5.16	-61.72
9	39581.51	39.87 PK	74	-34.13	-60.55	5.16	-55.39
10	39581.51	29.08 AV	54	-24.92	-71.34	5.16	-66.18

Note: Margin value = Emission Level - Limit value

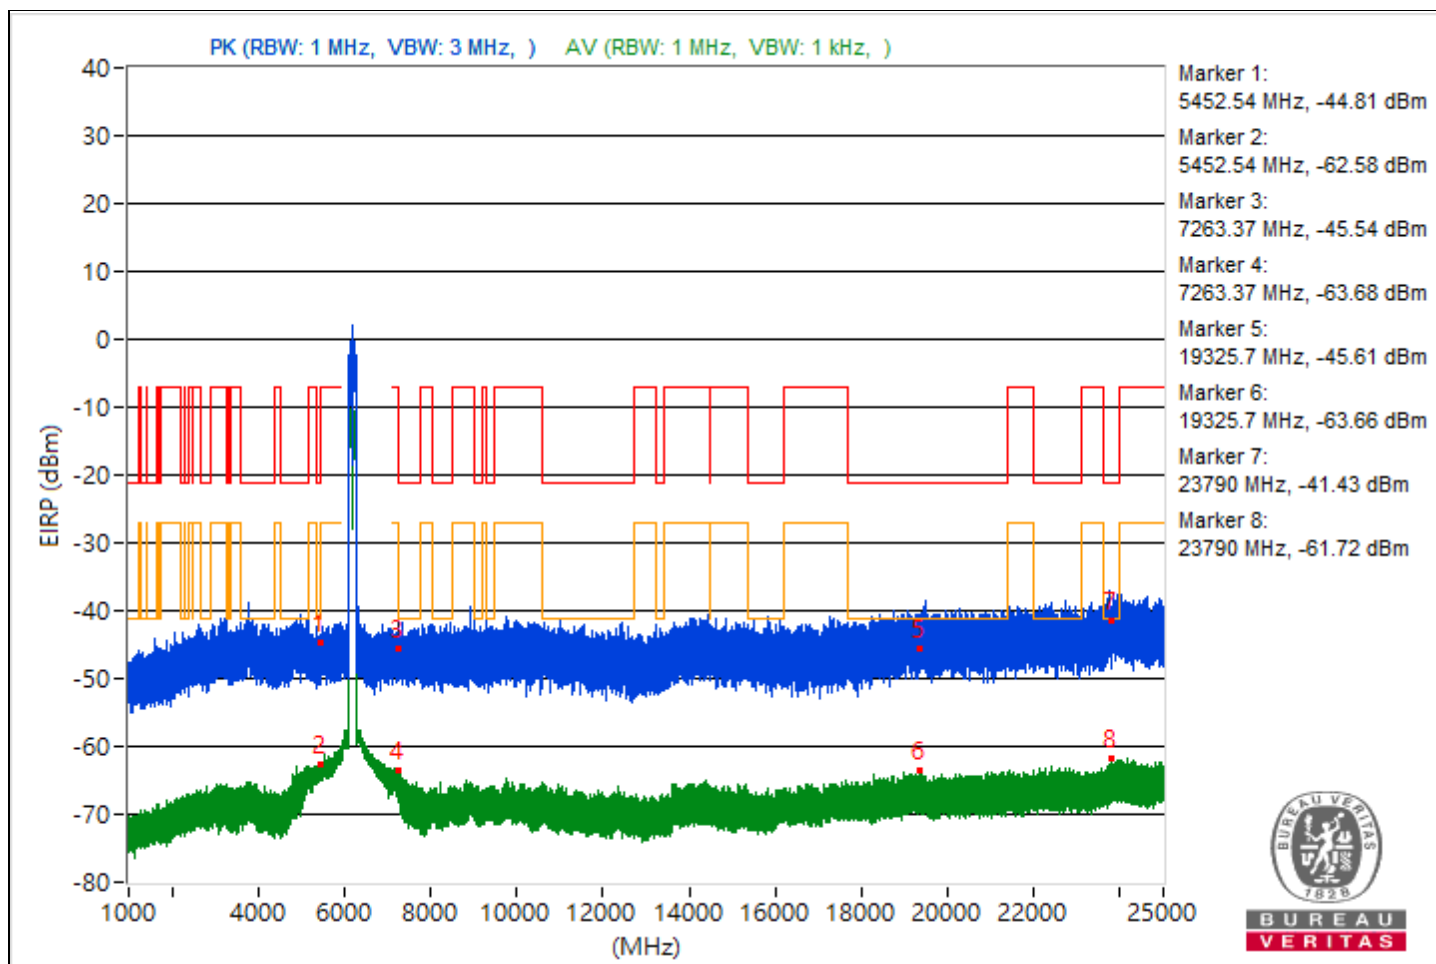


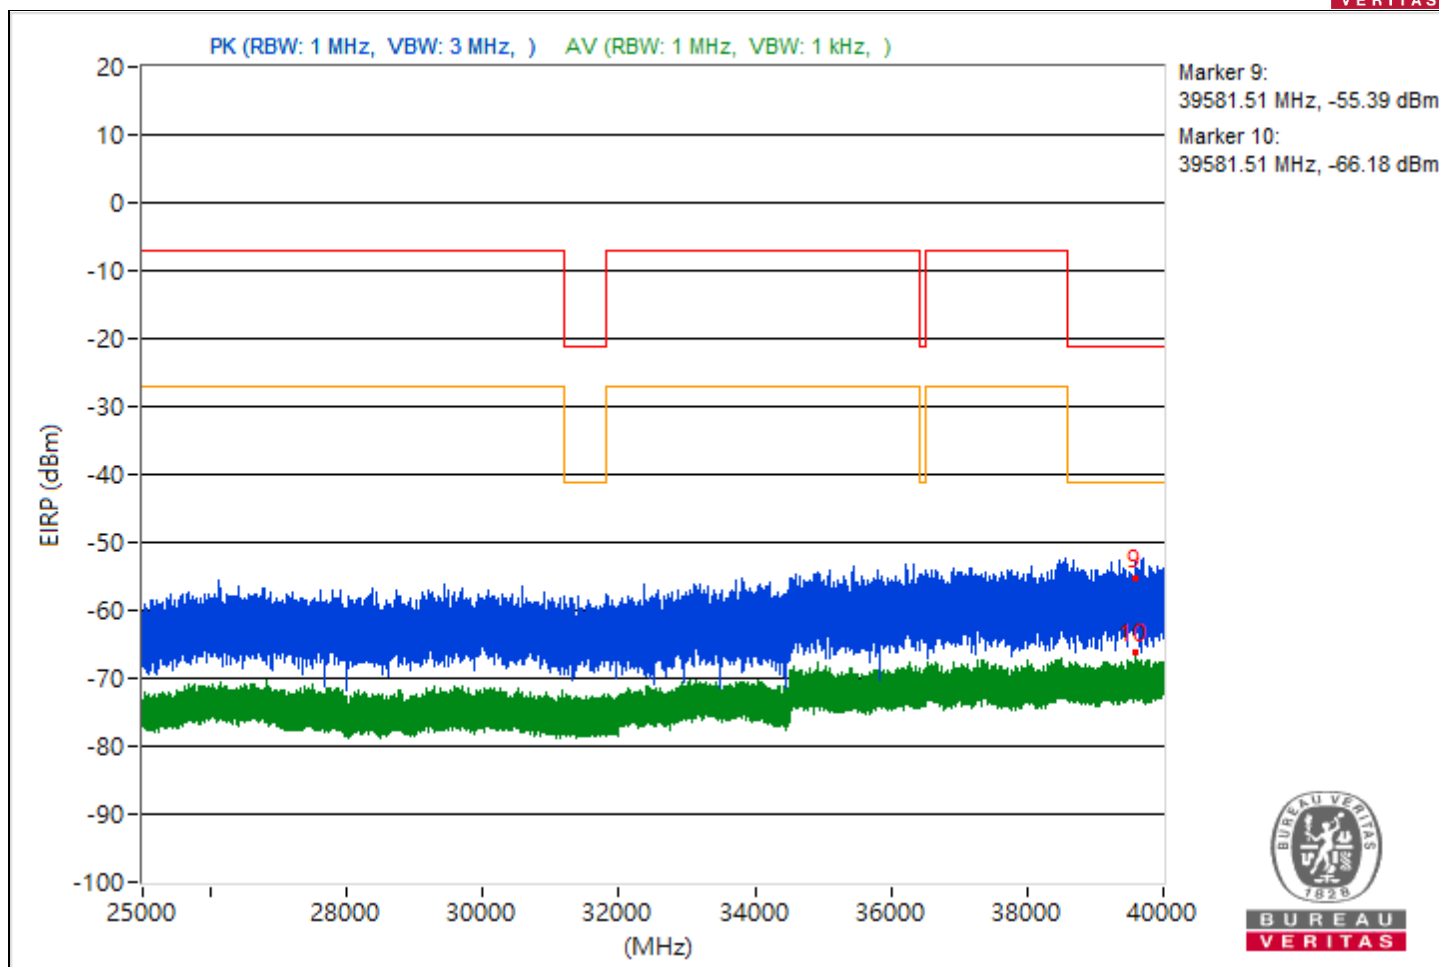


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5139.64	48.6 PK	74	-25.4	-51.82	5.16	-46.66
2	5139.64	32.44 AV	54	-21.56	-67.98	5.16	-62.82
3	7250.07	52.6 PK	74	-21.4	-47.82	5.16	-42.66
4	7250.07	31.18 AV	54	-22.82	-69.24	5.16	-64.08
5	19146.6	49.92 PK	74	-24.08	-50.5	5.16	-45.34
6	19146.6	31.7 AV	54	-22.3	-68.72	5.16	-63.56
7	23896.6	50.88 PK	74	-23.12	-49.54	5.16	-44.38
8	23896.6	33.56 AV	54	-20.44	-66.86	5.16	-61.7
9	39915.29	35.69 PK	74	-38.31	-64.73	5.16	-59.57
10	39915.29	28.64 AV	54	-25.36	-71.78	5.16	-66.62

Note: Margin value = Emission Level - Limit value

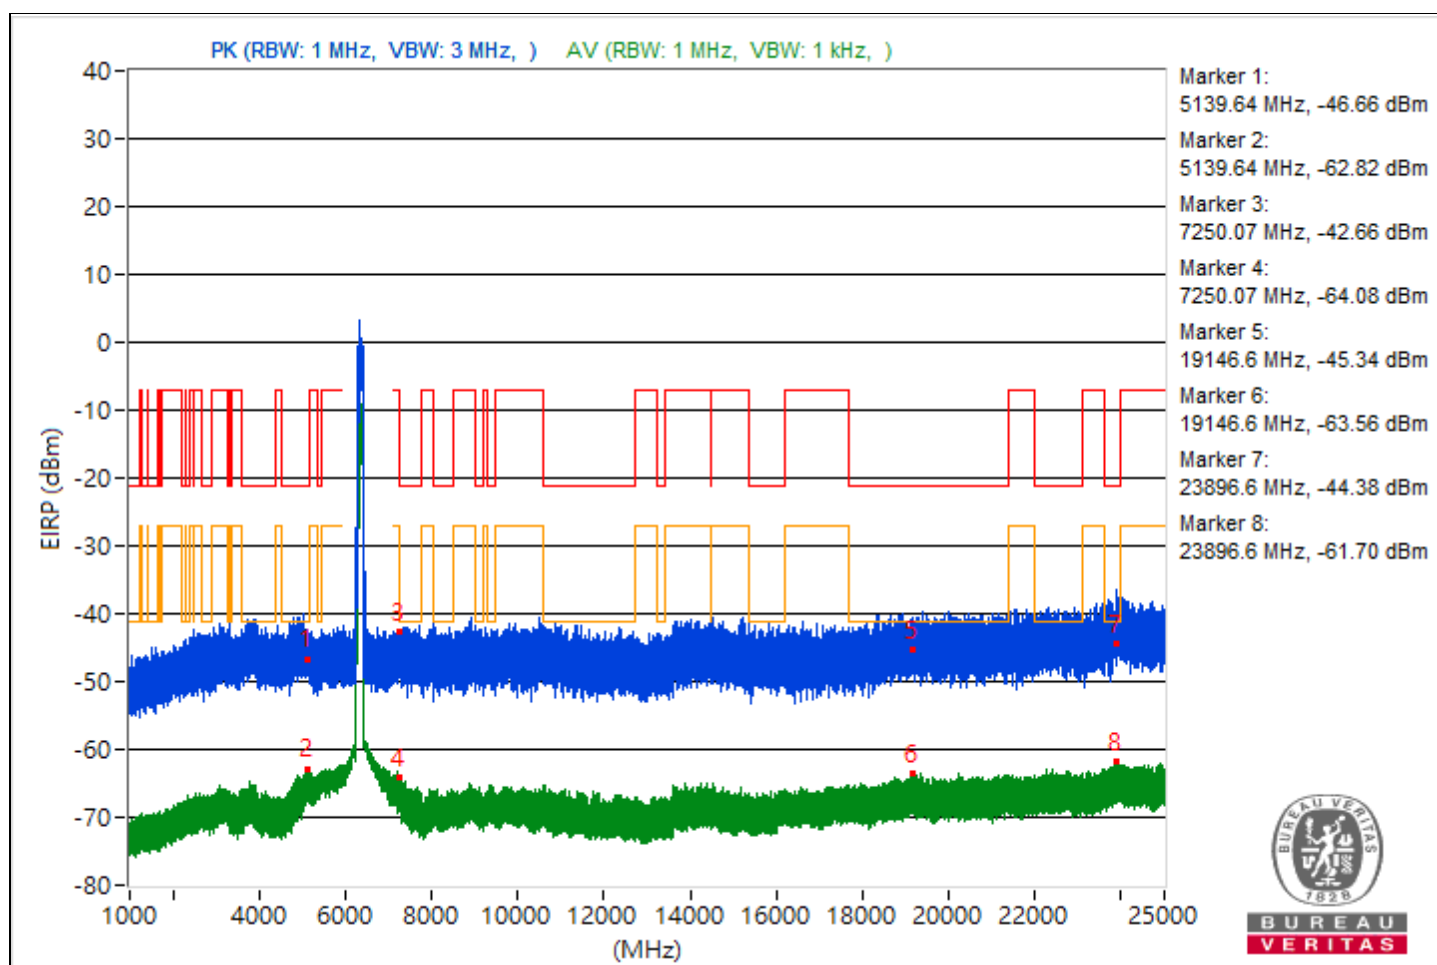


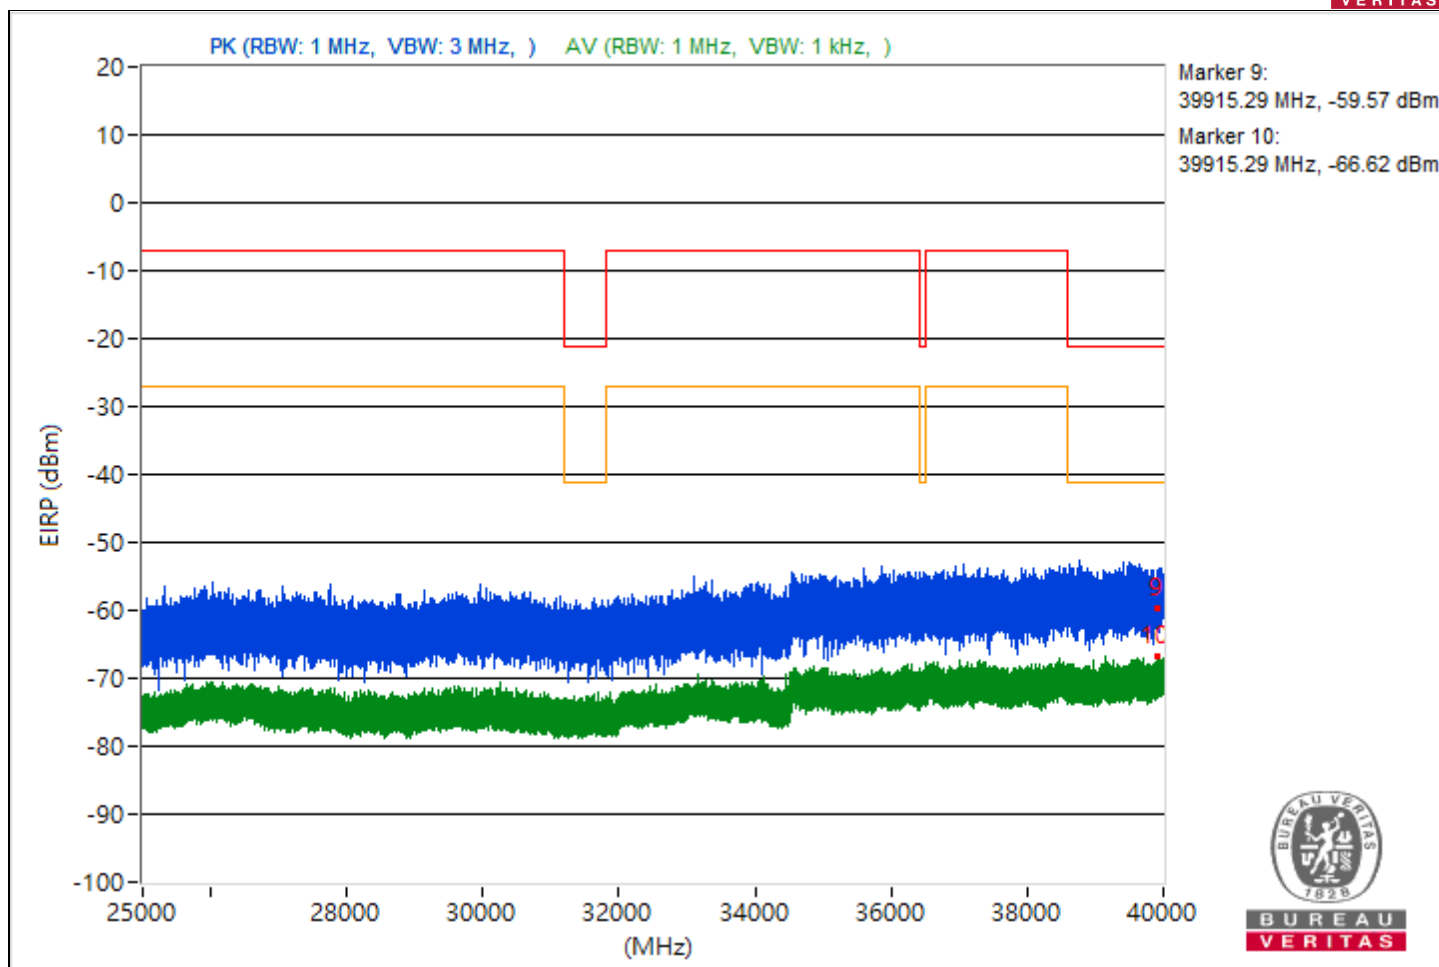


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5137.54	49.9 PK	74	-24.1	-50.52	5.16	-45.36
2	5137.54	32.39 AV	54	-21.61	-68.03	5.16	-62.87
3	7253.02	49.37 PK	74	-24.63	-51.05	5.16	-45.89
4	7253.02	31.52 AV	54	-22.48	-68.9	5.16	-63.74
5	20711.5	47.72 PK	74	-26.28	-52.7	5.16	-47.54
6	20711.5	31.56 AV	54	-22.44	-68.86	5.16	-63.7
7	23969.3	51.23 PK	74	-22.77	-49.19	5.16	-44.03
8	23969.3	33.76 AV	54	-20.24	-66.66	5.16	-61.5
9	39984.27	39.76 PK	74	-34.24	-60.66	5.16	-55.5
10	39984.27	28.56 AV	54	-25.44	-71.86	5.16	-66.7

Note: Margin value = Emission Level - Limit value

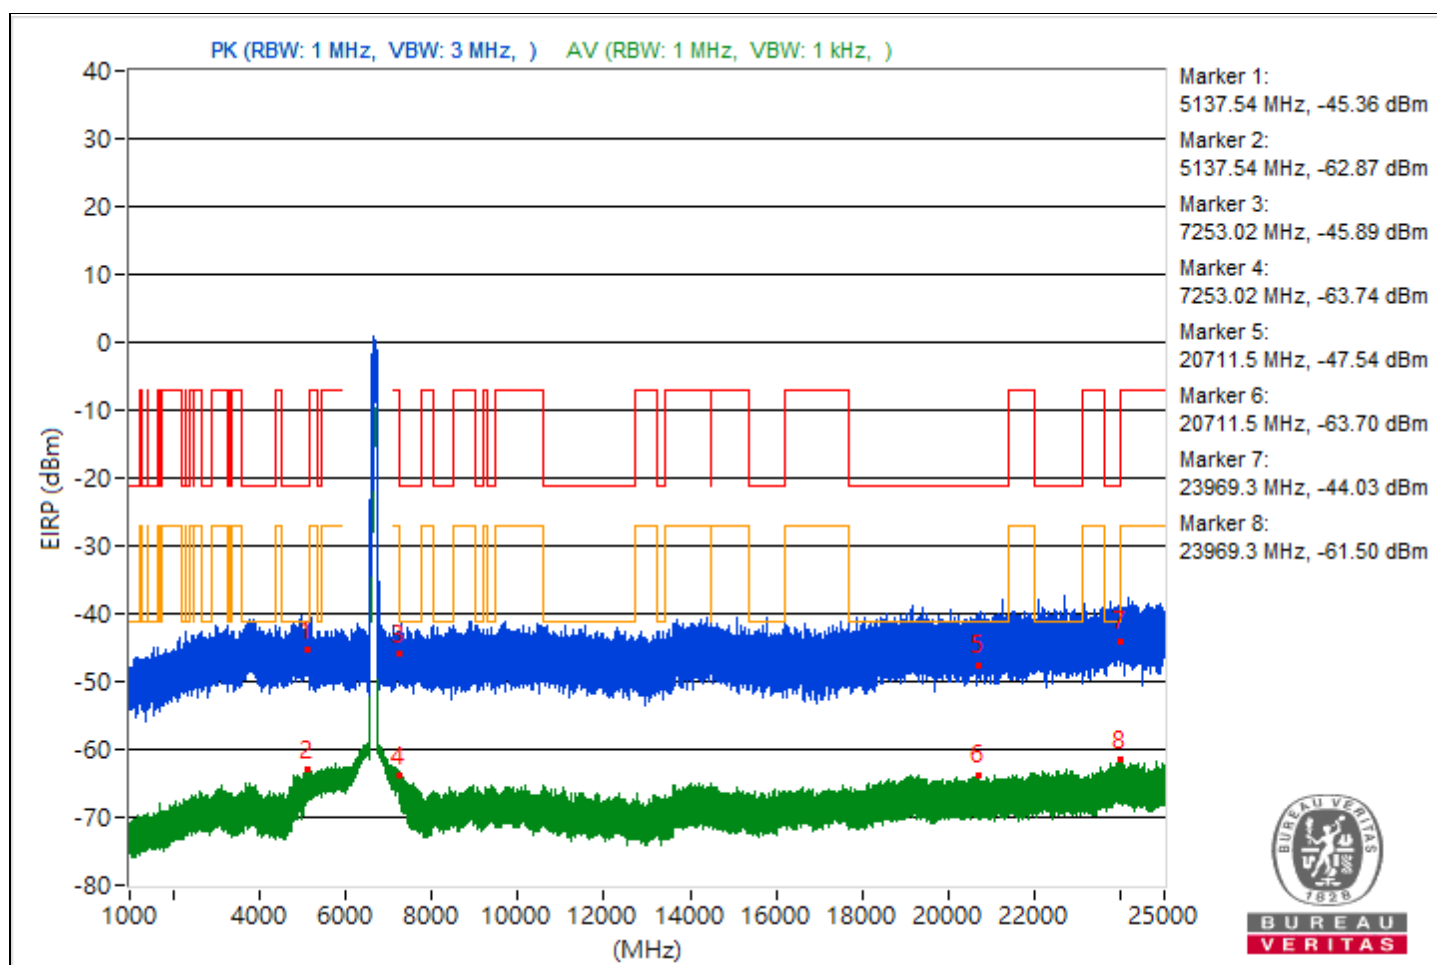


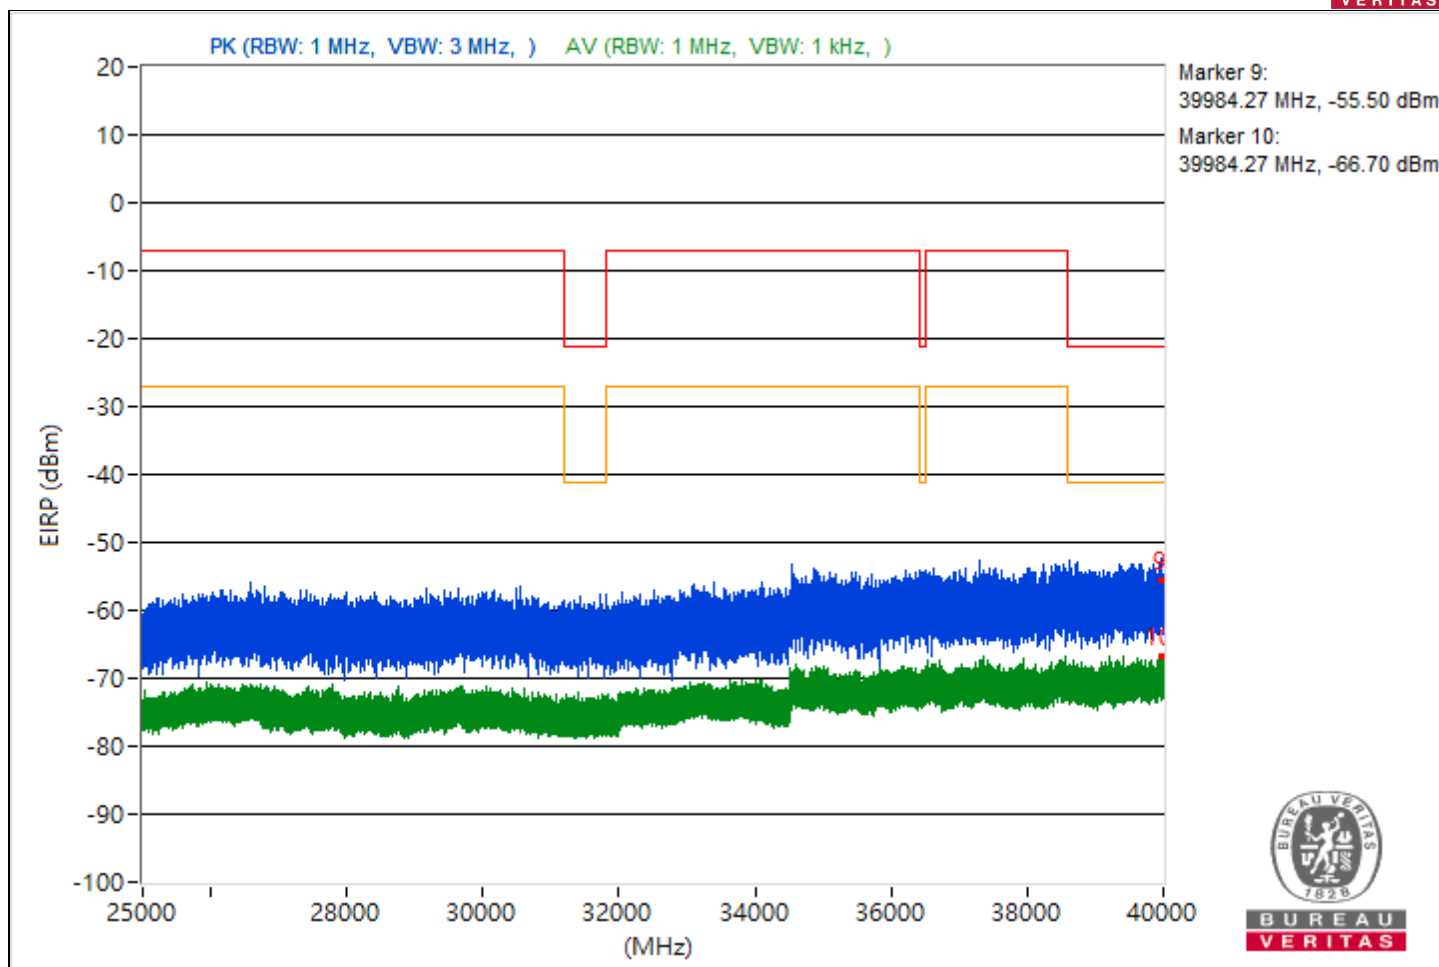


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4883.99	53.93 PK	74	-20.07	-46.49	5.16	-41.33
2	4883.99	46.2 AV	54	-7.8	-54.22	5.16	-49.06
3	7326.21	55.05 PK	74	-18.95	-45.37	5.16	-40.21
4	7326.21	49.48 AV	54	-4.52	-50.94	5.16	-45.78
5	19212.6	49.57 PK	74	-24.43	-50.85	5.16	-45.69
6	19212.6	32.32 AV	54	-21.68	-68.1	5.16	-62.94
7	23923.1	49.1 PK	74	-24.9	-51.32	5.16	-46.16
8	23923.1	33.58 AV	54	-20.42	-66.84	5.16	-61.68
9	39860.71	35.55 PK	74	-38.45	-64.87	5.16	-59.71
10	39860.71	29.38 AV	54	-24.62	-71.04	5.16	-65.88

Note: Margin value = Emission Level - Limit value

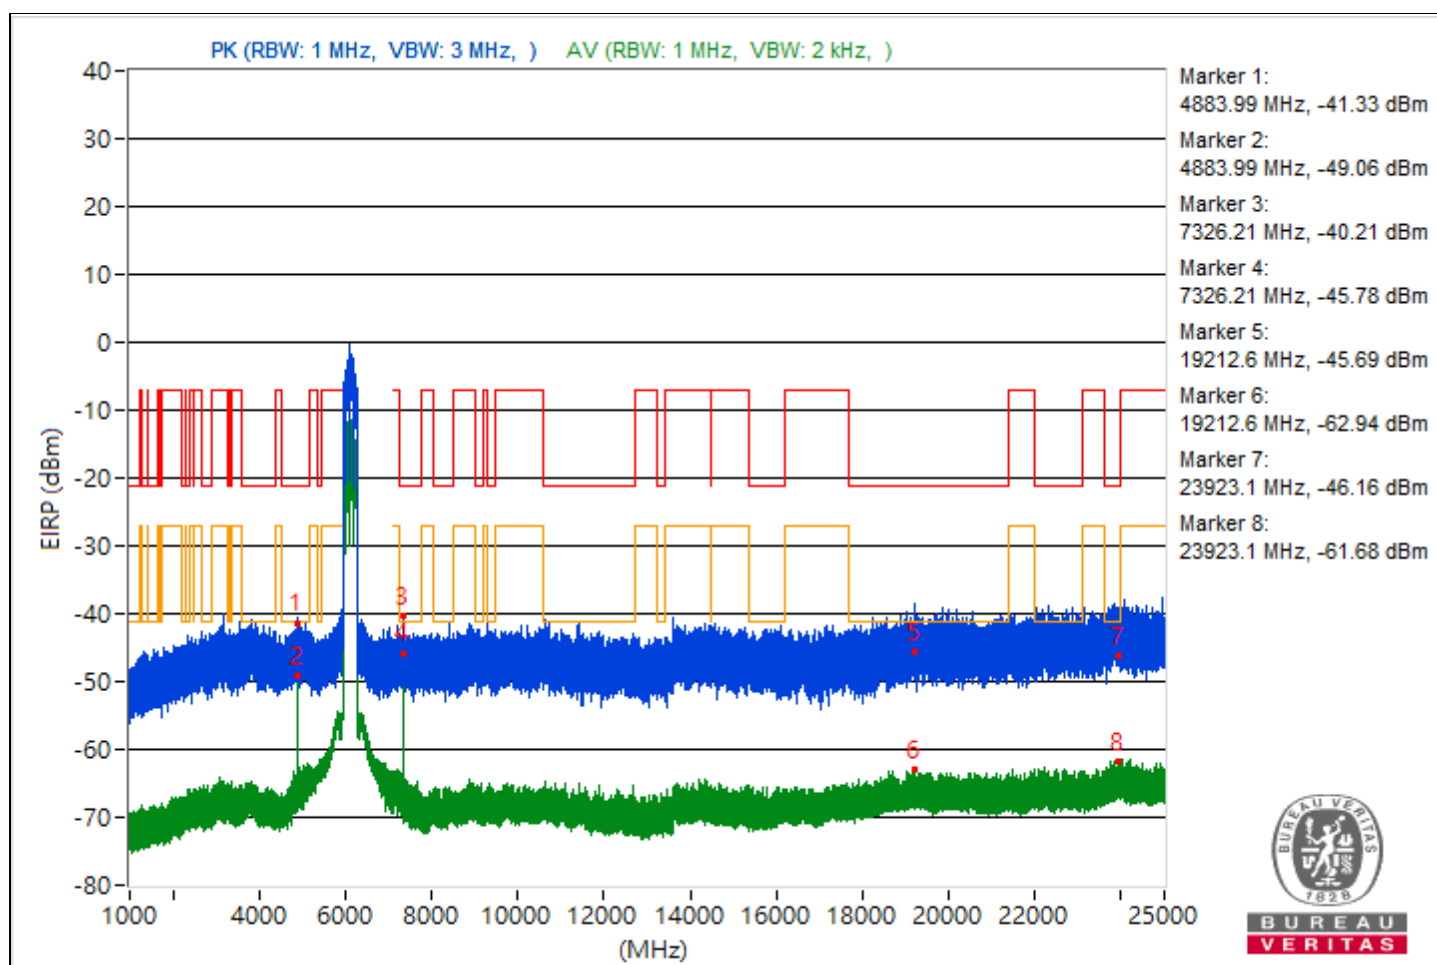


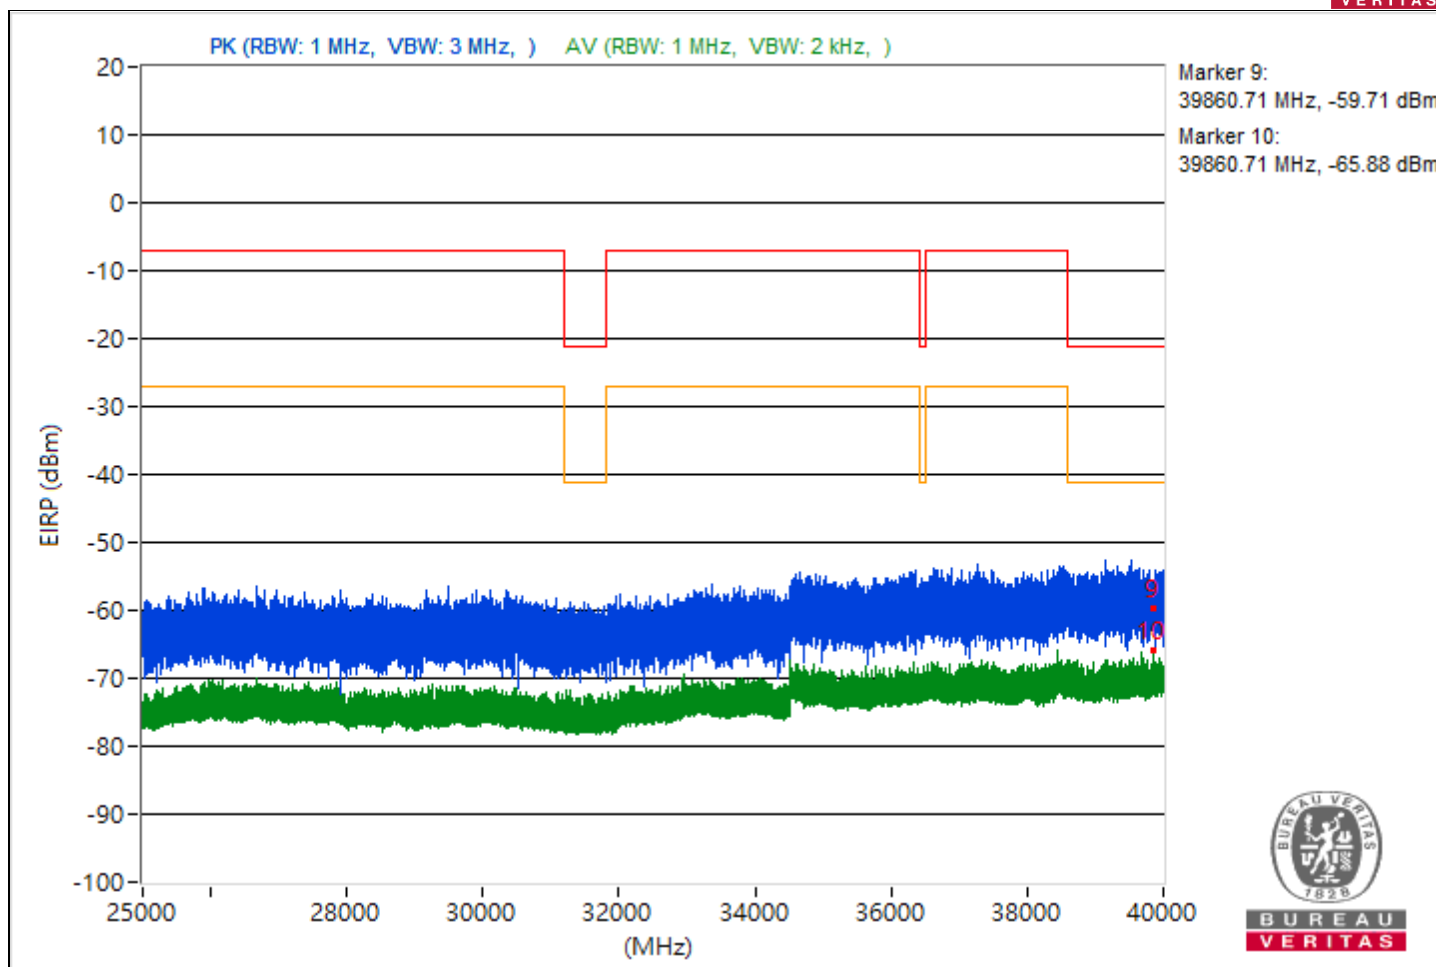


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5048.26	49.07 PK	74	-24.93	-51.35	5.16	-46.19
2	5048.26	32.72 AV	54	-21.28	-67.7	5.16	-62.54
3	7298.76	48.98 PK	74	-25.02	-51.44	5.16	-46.28
4	7298.76	31.25 AV	54	-22.75	-69.17	5.16	-64.01
5	20906.2	50.9 PK	74	-23.1	-49.52	5.16	-44.36
6	20906.2	32.71 AV	54	-21.29	-67.71	5.16	-62.55
7	23933.4	52.15 PK	74	-21.85	-48.27	5.16	-43.11
8	23933.4	34.31 AV	54	-19.69	-66.11	5.16	-60.95
9	39720.36	38.65 PK	74	-35.35	-61.77	5.16	-56.61
10	39720.36	28.71 AV	54	-25.29	-71.71	5.16	-66.55

Note: Margin value = Emission Level - Limit value

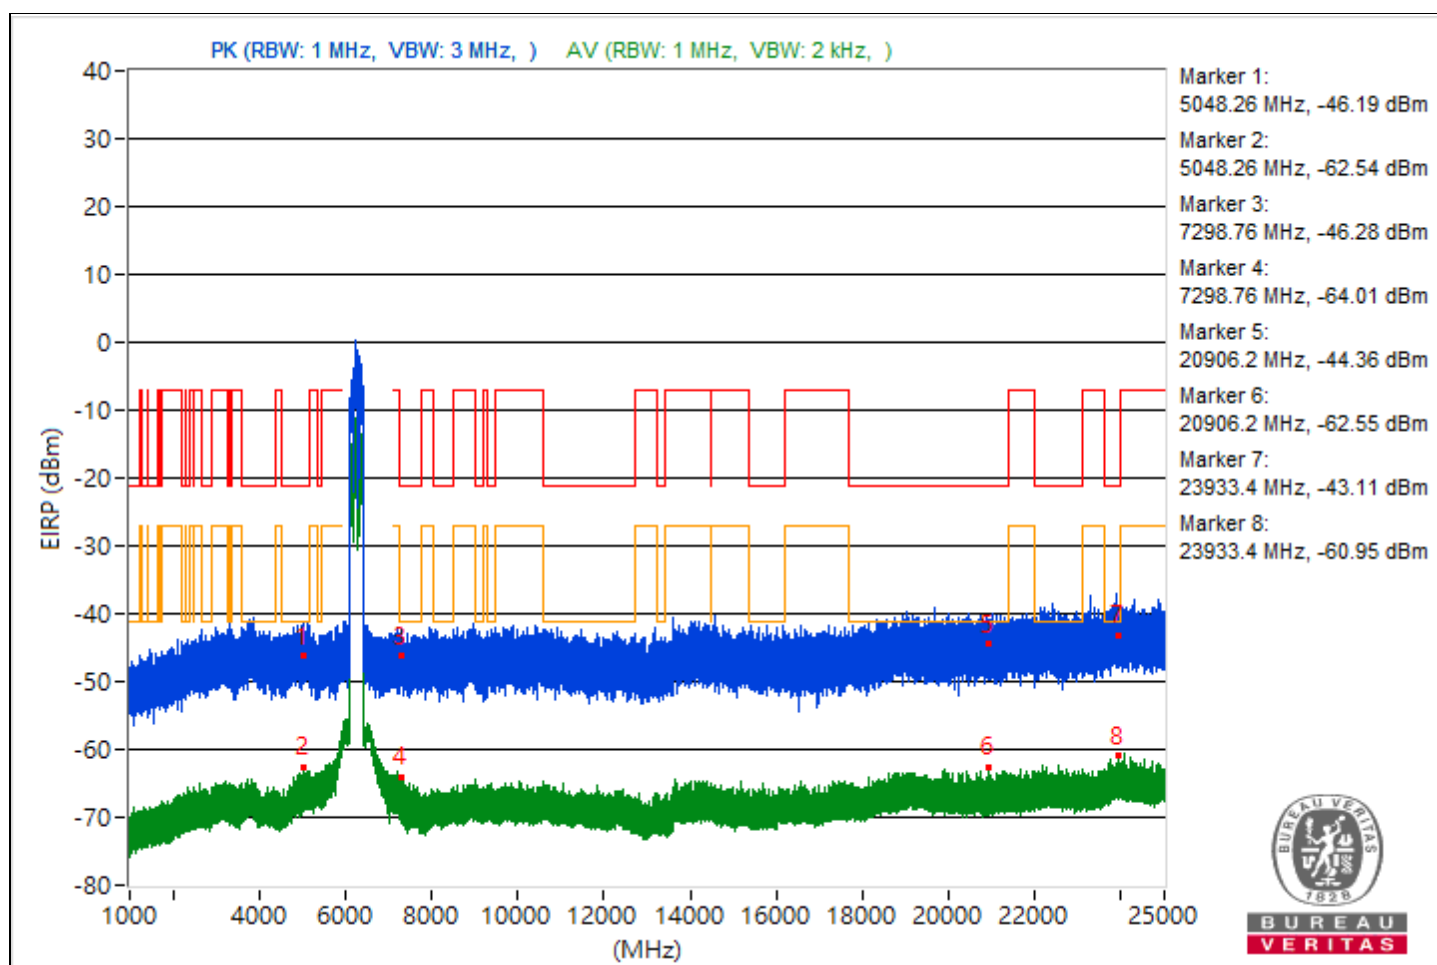


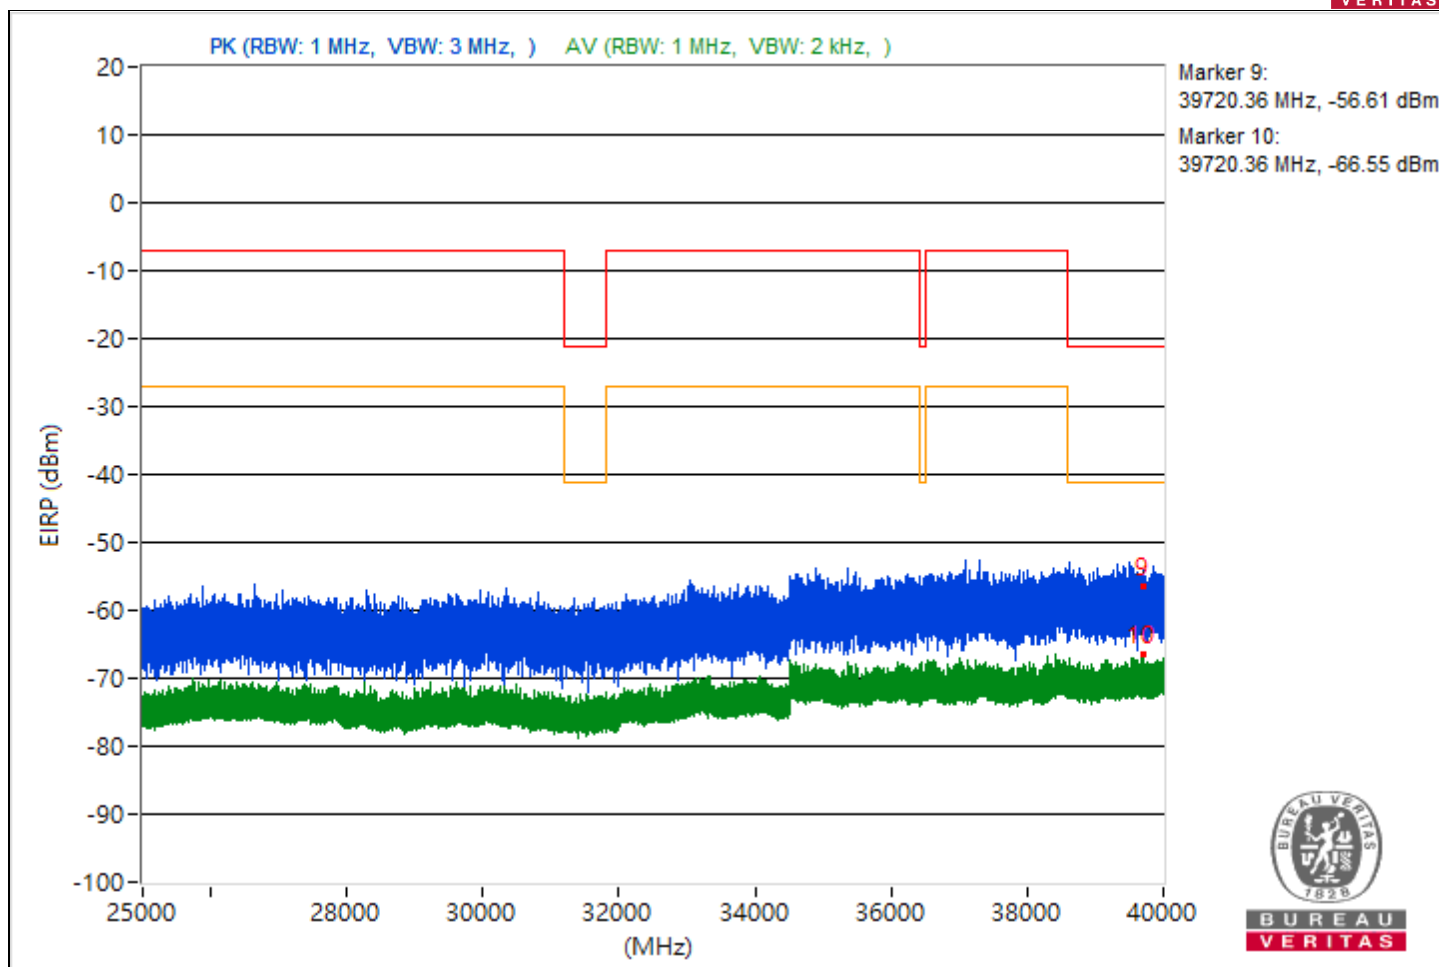


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3264.5	47.83 PK	74	-26.17	-52.59	5.16	-47.43
2	3264.5	29.52 AV	54	-24.48	-70.9	5.16	-65.74
3	10703.29	49.99 PK	74	-24.01	-50.43	5.16	-45.27
4	10703.29	29.29 AV	54	-24.71	-71.13	5.16	-65.97
5	20196.8	49.45 PK	74	-24.55	-50.97	5.16	-45.81
6	20196.8	30.72 AV	54	-23.28	-69.7	5.16	-64.54
7	23789.6	53.91 PK	74	-20.09	-46.51	5.16	-41.35
8	23789.6	32.49 AV	54	-21.51	-67.93	5.16	-62.77
9	39174.67	35.93 PK	74	-38.07	-64.49	5.16	-59.33
10	39174.67	27.67 AV	54	-26.33	-72.75	5.16	-67.59

Note: Margin value = Emission Level - Limit value

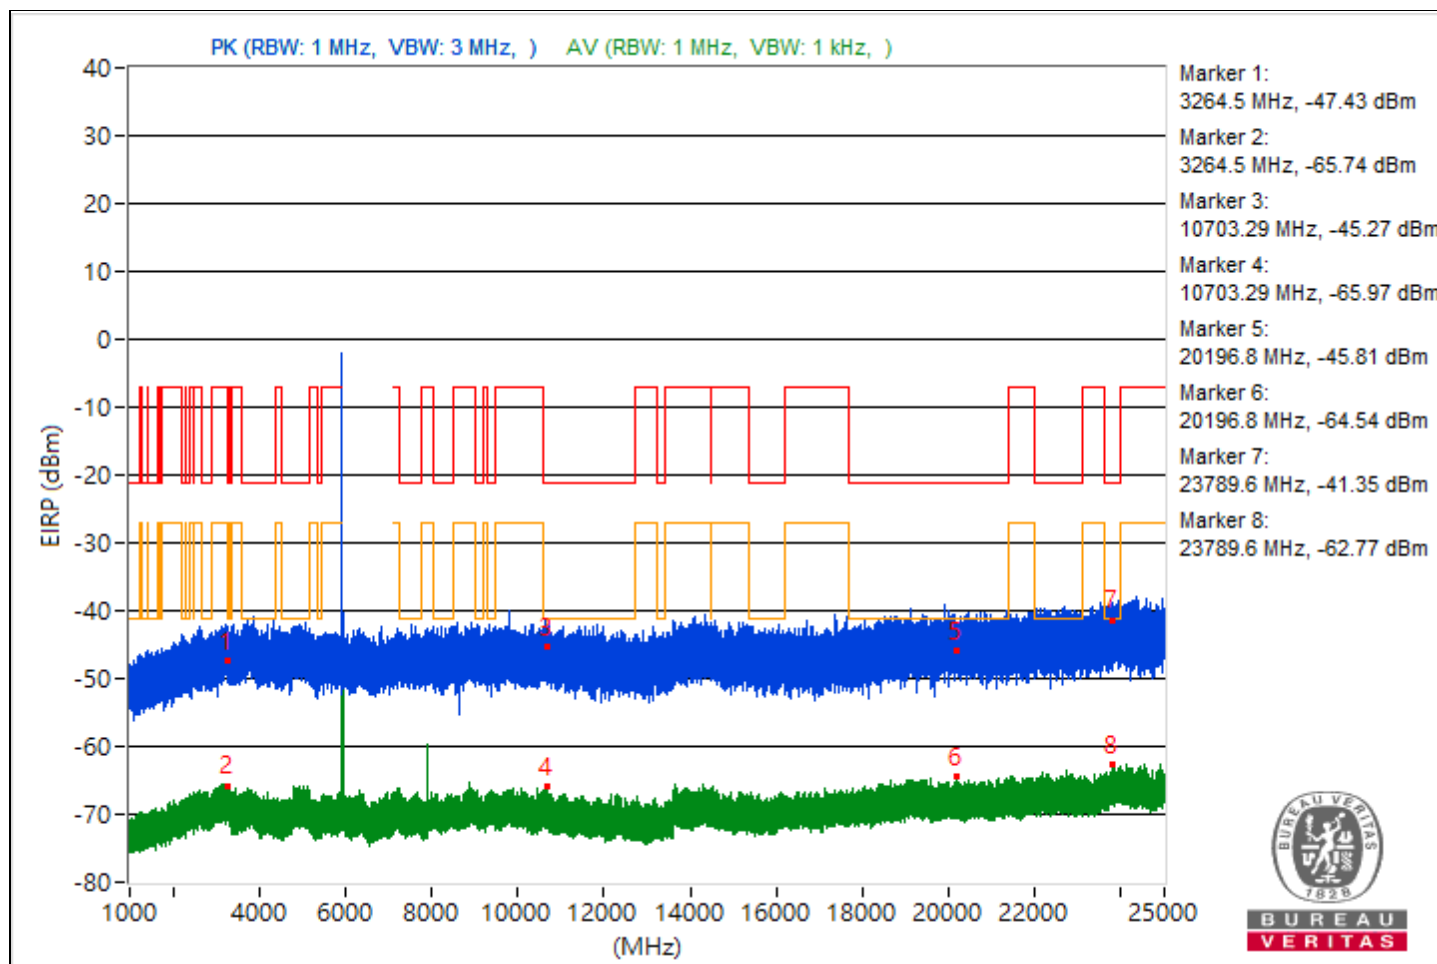


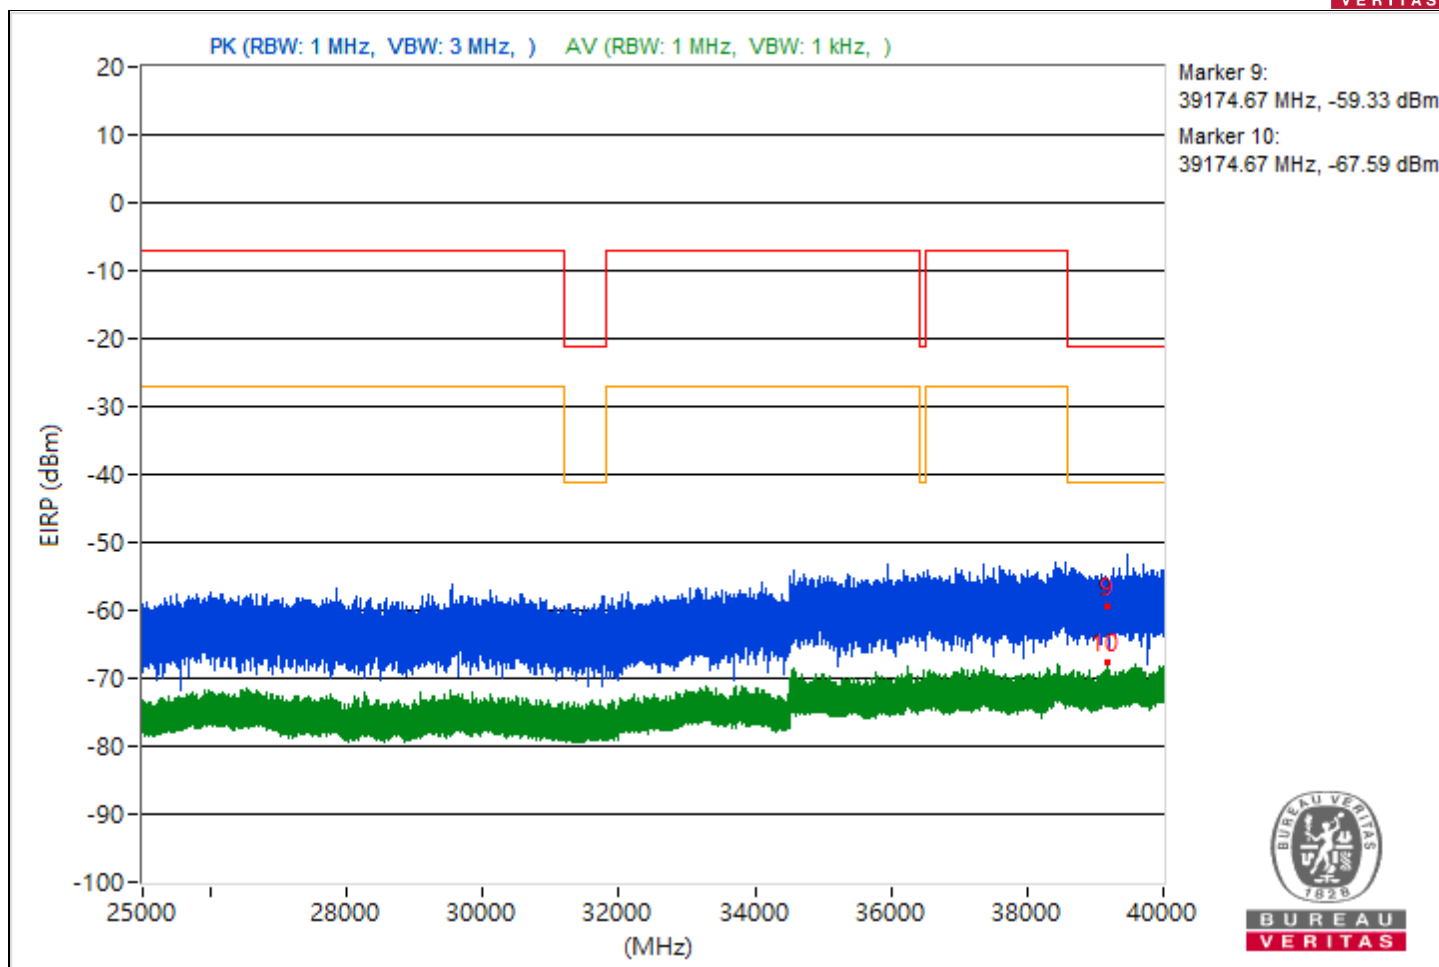


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4888.58	49.84 PK	74	-24.16	-50.58	5.16	-45.42
2	4888.58	30.56 AV	54	-23.44	-69.86	5.16	-64.7
3	9350.58	46.91 PK	74	-27.09	-53.51	5.16	-48.35
4	9350.58	30.04 AV	54	-23.96	-70.38	5.16	-65.22
5	20560.9	50.71 PK	74	-23.29	-49.71	5.16	-44.55
6	20560.9	32.03 AV	54	-21.97	-68.39	5.16	-63.23
7	23957.6	48.67 PK	74	-25.33	-51.75	5.16	-46.59
8	23957.6	33.2 AV	54	-20.8	-67.22	5.16	-62.06
9	39712.71	38.74 PK	74	-35.26	-61.68	5.16	-56.52
10	39712.71	28.21 AV	54	-25.79	-72.21	5.16	-67.05

Note: Margin value = Emission Level - Limit value

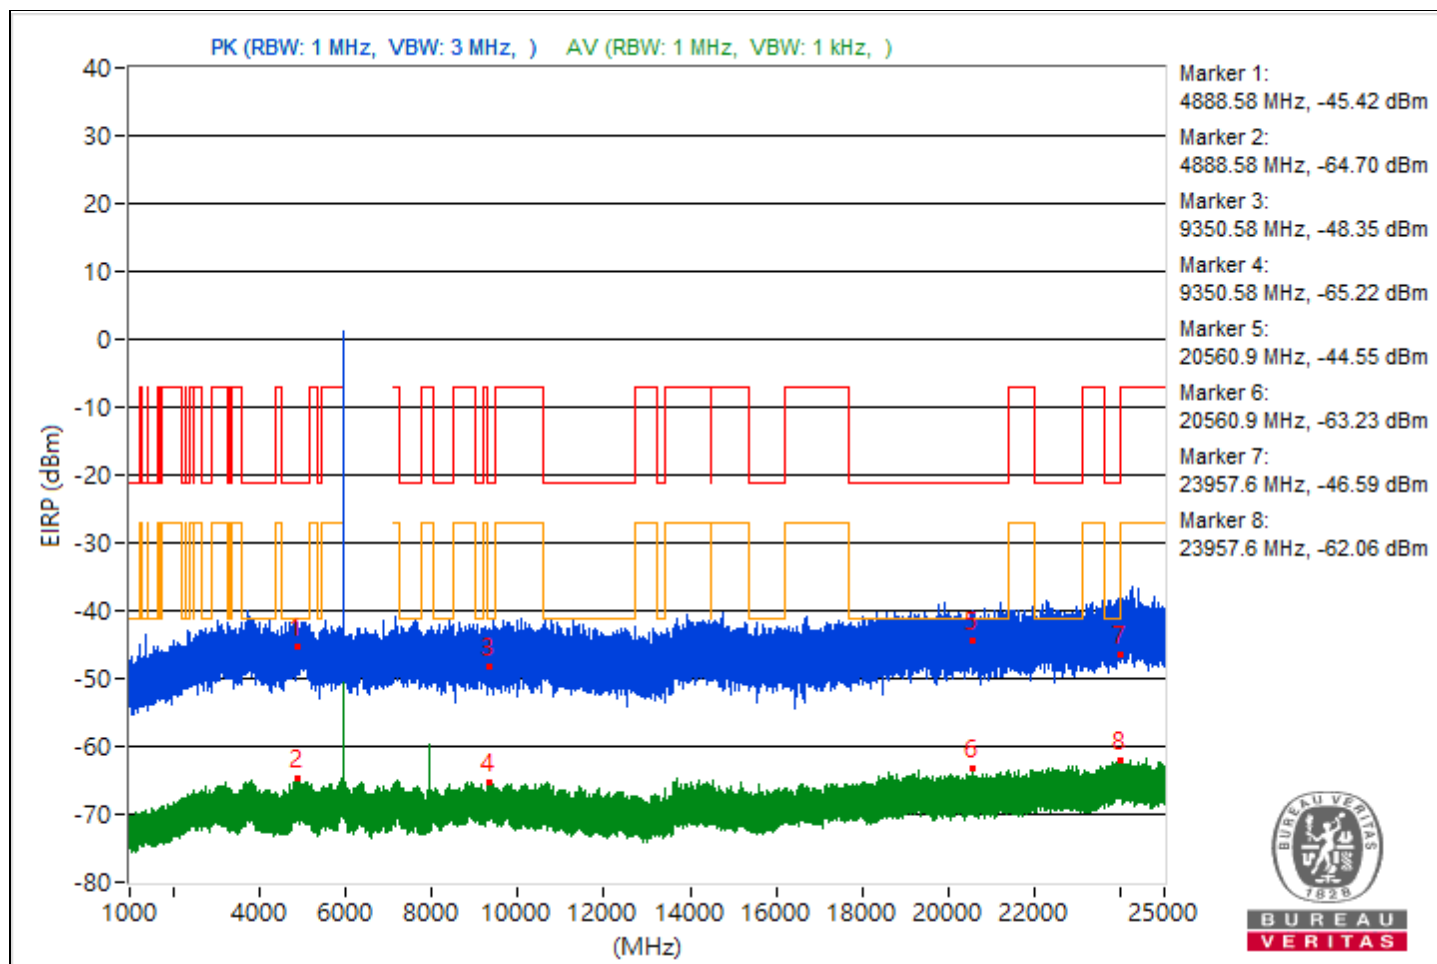


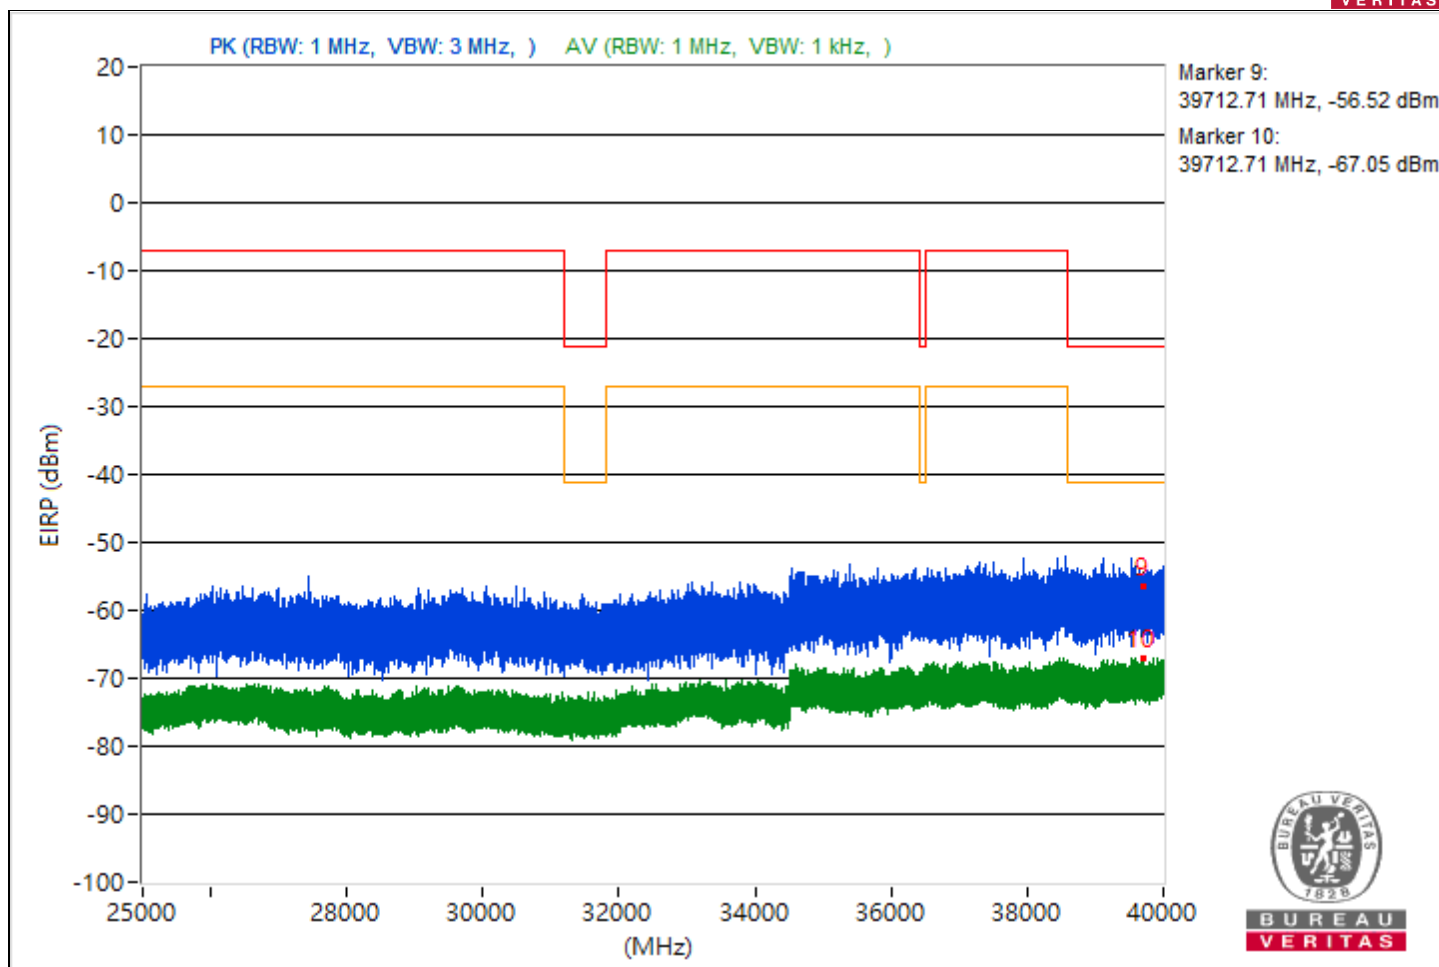


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5109.62	49.53 PK	74	-24.47	-50.89	5.16	-45.73
2	5109.62	30.19 AV	54	-23.81	-70.23	5.16	-65.07
3	7270.83	48.41 PK	74	-25.59	-52.01	5.16	-46.85
4	7270.83	29.89 AV	54	-24.11	-70.53	5.16	-65.37
5	21306.5	51.23 PK	74	-22.77	-49.19	5.16	-44.03
6	21306.5	31.96 AV	54	-22.04	-68.46	5.16	-63.3
7	23934.3	55.27 PK	74	-18.73	-45.15	5.16	-39.99
8	23934.3	33.57 AV	54	-20.43	-66.85	5.16	-61.69
9	39611.73	36.11 PK	74	-37.89	-64.31	5.16	-59.15
10	39611.73	28.51 AV	54	-25.49	-71.91	5.16	-66.75

Note: Margin value = Emission Level - Limit value

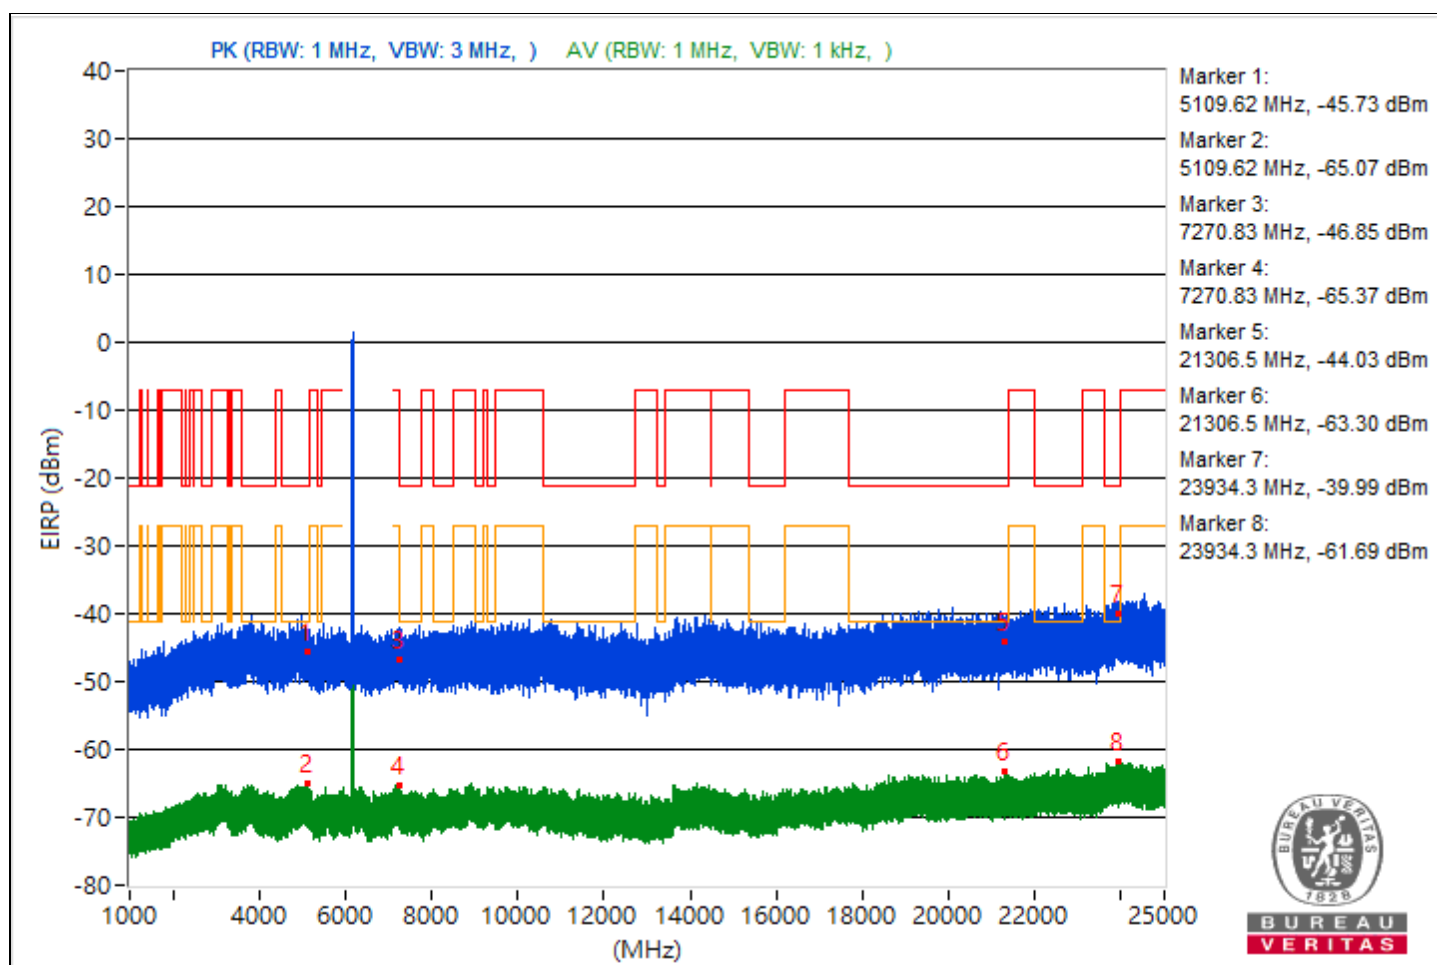


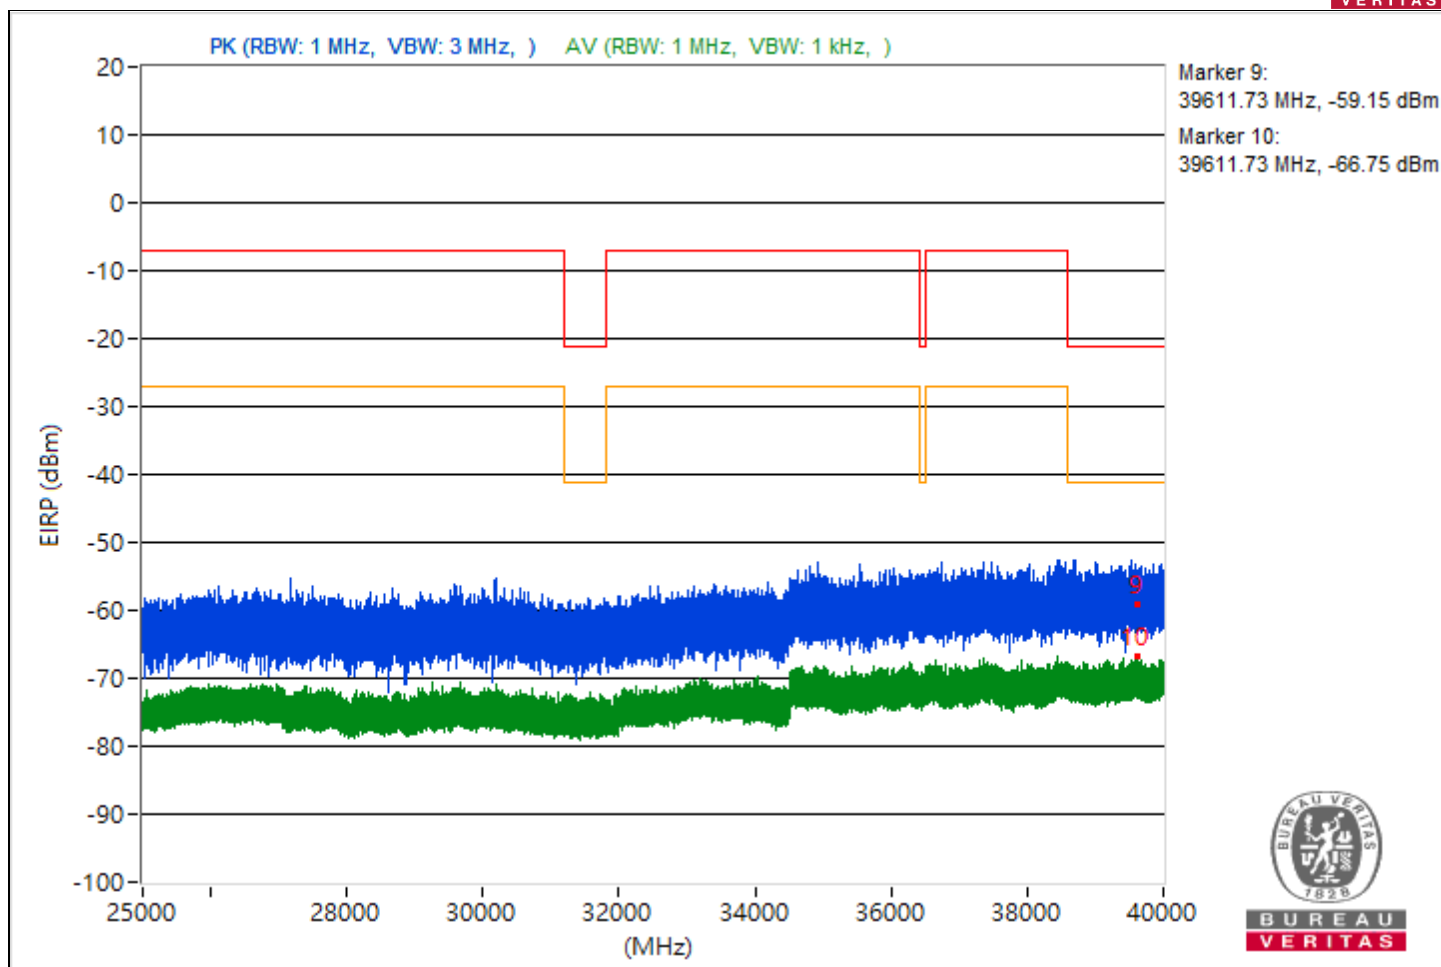


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4828.61	50.55 PK	74	-23.45	-49.87	5.16	-44.71
2	4828.61	30.59 AV	54	-23.41	-69.83	5.16	-64.67
3	10600.8	48.34 PK	74	-25.66	-52.08	5.16	-46.92
4	10600.8	29.91 AV	54	-24.09	-70.51	5.16	-65.35
5	18985.7	51.48 PK	74	-22.52	-48.94	5.16	-43.78
6	18985.7	31.39 AV	54	-22.61	-69.03	5.16	-63.87
7	23807	53.92 PK	74	-20.08	-46.5	5.16	-41.34
8	23807	33.62 AV	54	-20.38	-66.8	5.16	-61.64
9	38637.42	34.98 PK	74	-39.02	-65.44	5.16	-60.28
10	38637.42	28.26 AV	54	-25.74	-72.16	5.16	-67

Note: Margin value = Emission Level - Limit value

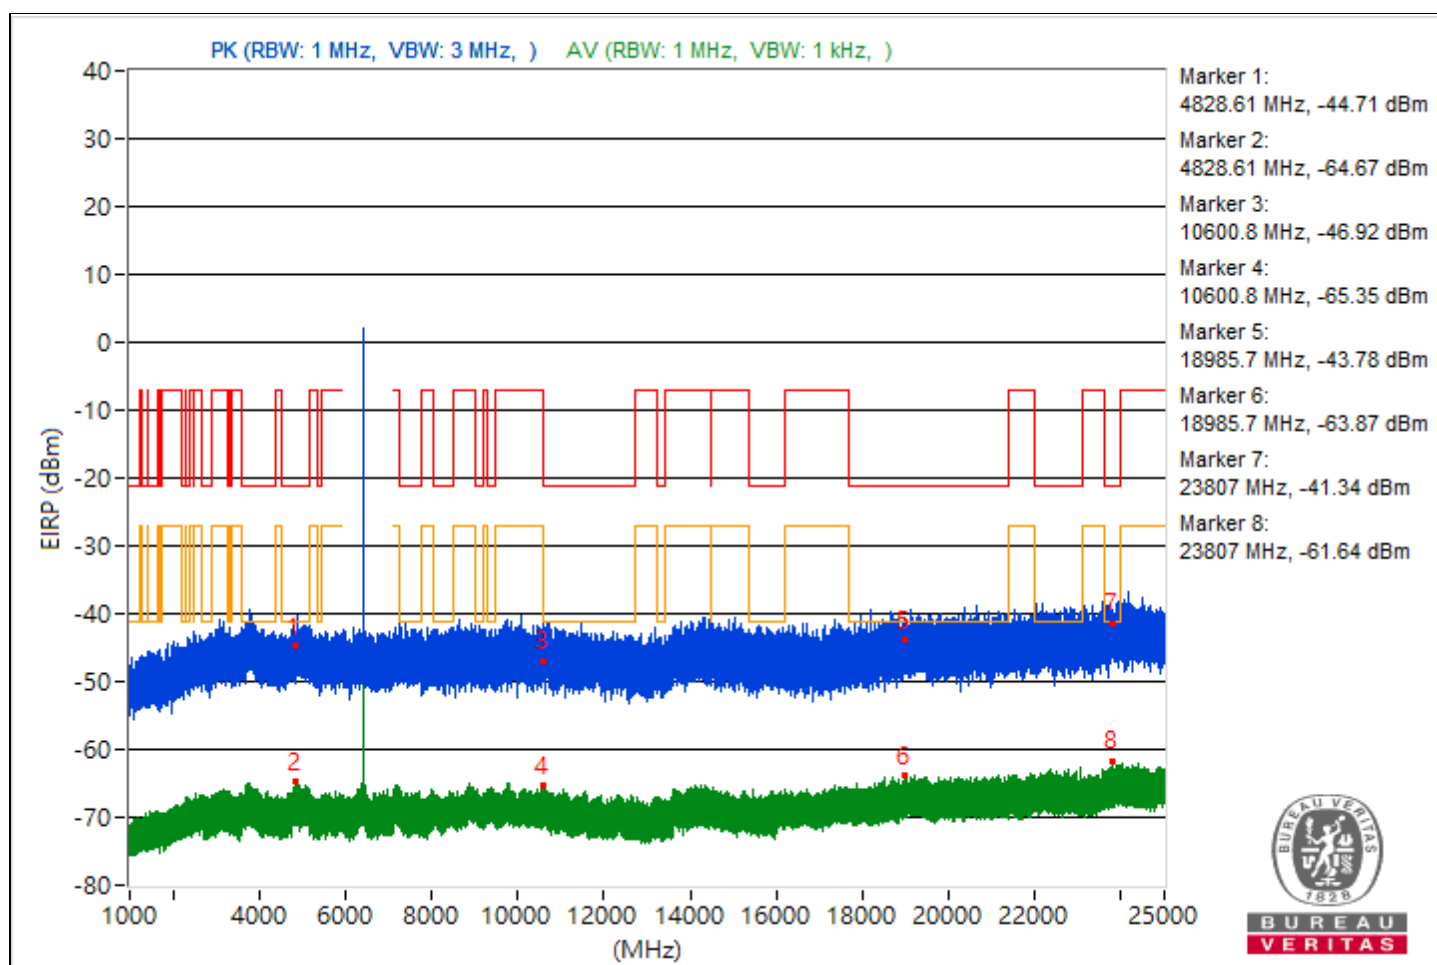


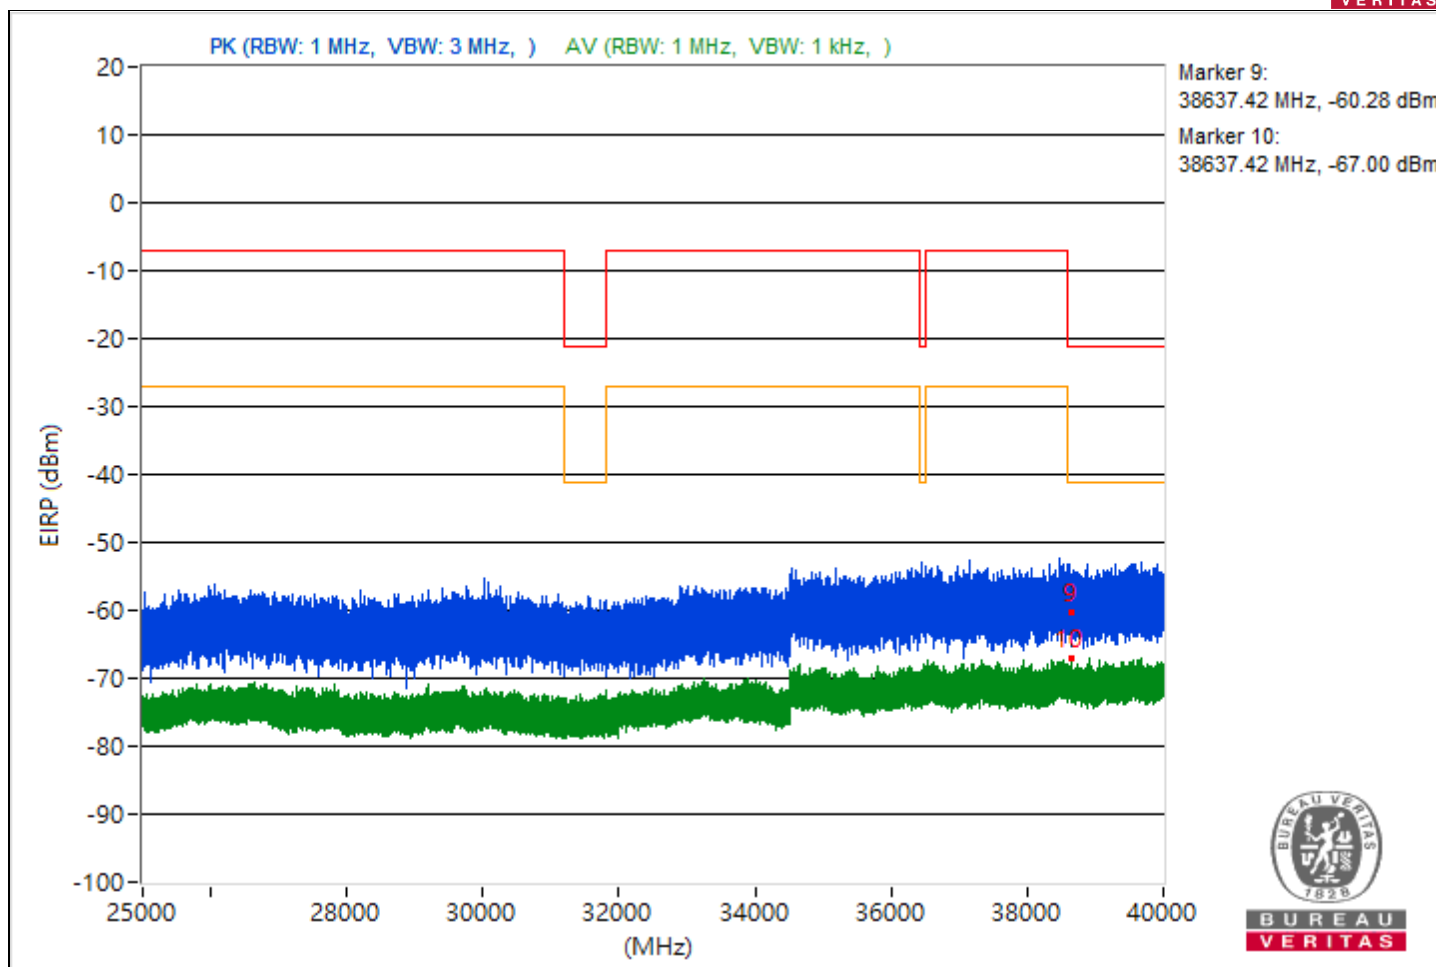


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3779.16	53.52 PK	74	-20.48	-46.9	5.16	-41.74
2	3779.16	30.51 AV	54	-23.49	-69.91	5.16	-64.75
3	10666.76	49.32 PK	74	-24.68	-51.1	5.16	-45.94
4	10666.76	29.97 AV	54	-24.03	-70.45	5.16	-65.29
5	19868.3	51.14 PK	74	-22.86	-49.28	5.16	-44.12
6	19868.3	31.61 AV	54	-22.39	-68.81	5.16	-63.65
7	23879.7	50.31 PK	74	-23.69	-50.11	5.16	-44.95
8	23879.7	32.62 AV	54	-21.38	-67.8	5.16	-62.64
9	39957.16	32.17 PK	74	-41.83	-68.25	5.16	-63.09
10	39957.16	28.48 AV	54	-25.52	-71.94	5.16	-66.78

Note: Margin value = Emission Level - Limit value

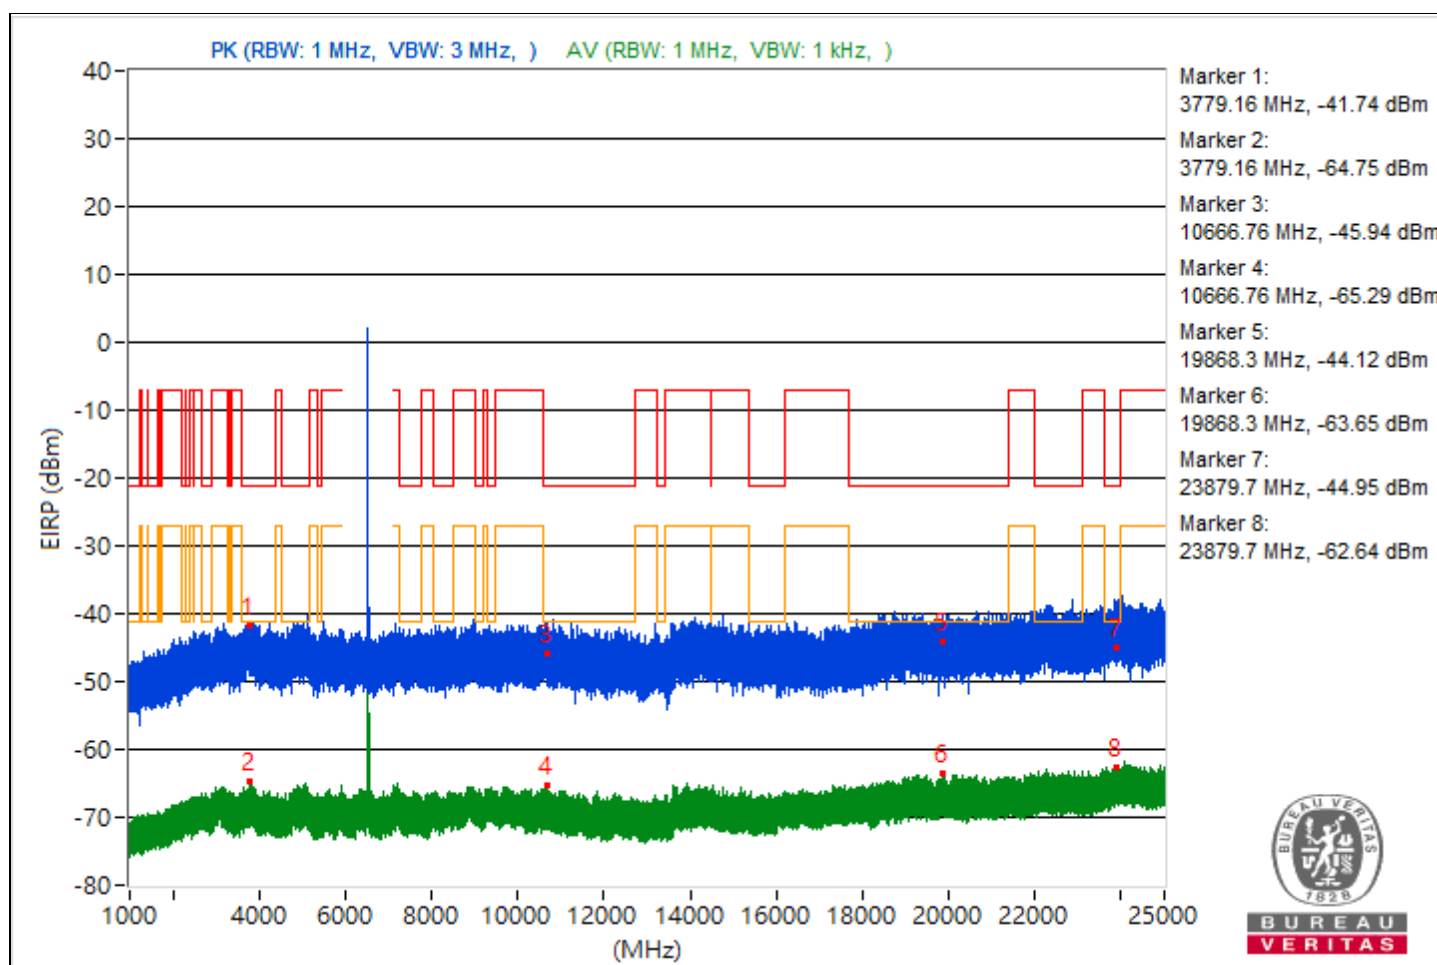


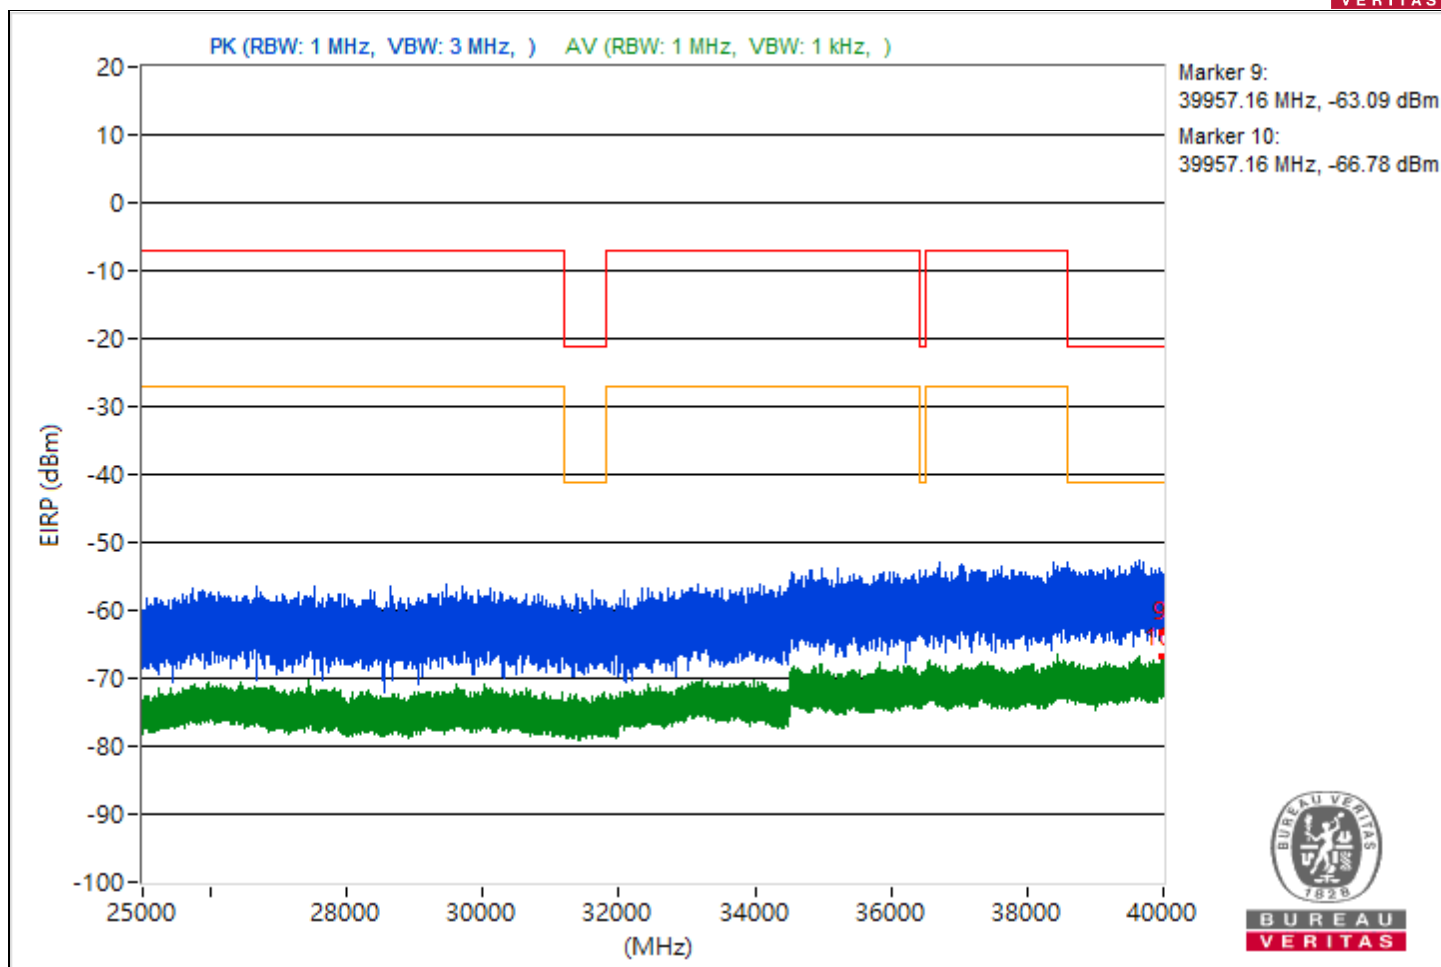


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4899.08	50.54 PK	74	-23.46	-49.88	5.16	-44.72
2	4899.08	30.93 AV	54	-23.07	-69.49	5.16	-64.33
3	14472.89	53.07 PK	74	-20.93	-47.35	5.16	-42.19
4	14472.89	30.23 AV	54	-23.77	-70.19	5.16	-65.03
5	18749.1	51.42 PK	74	-22.58	-49	5.16	-43.84
6	18749.1	31.45 AV	54	-22.55	-68.97	5.16	-63.81
7	23993.3	53.21 PK	74	-20.79	-47.21	5.16	-42.05
8	23993.3	33.26 AV	54	-20.74	-67.16	5.16	-62
9	39561.33	37.02 PK	74	-36.98	-63.4	5.16	-58.24
10	39561.33	28.46 AV	54	-25.54	-71.96	5.16	-66.8

Note: Margin value = Emission Level - Limit value

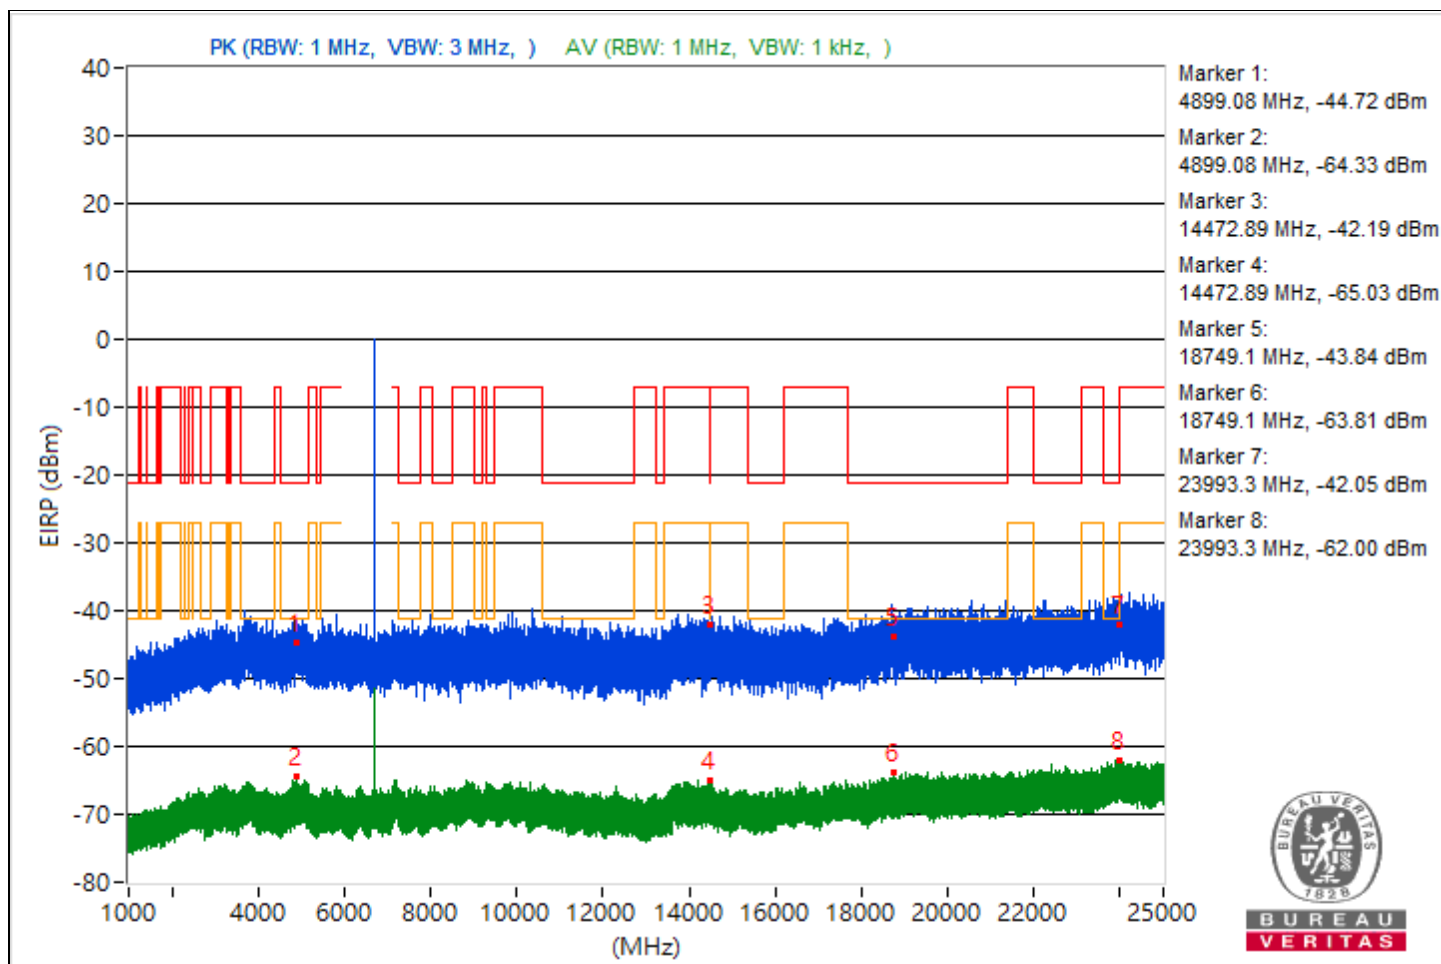


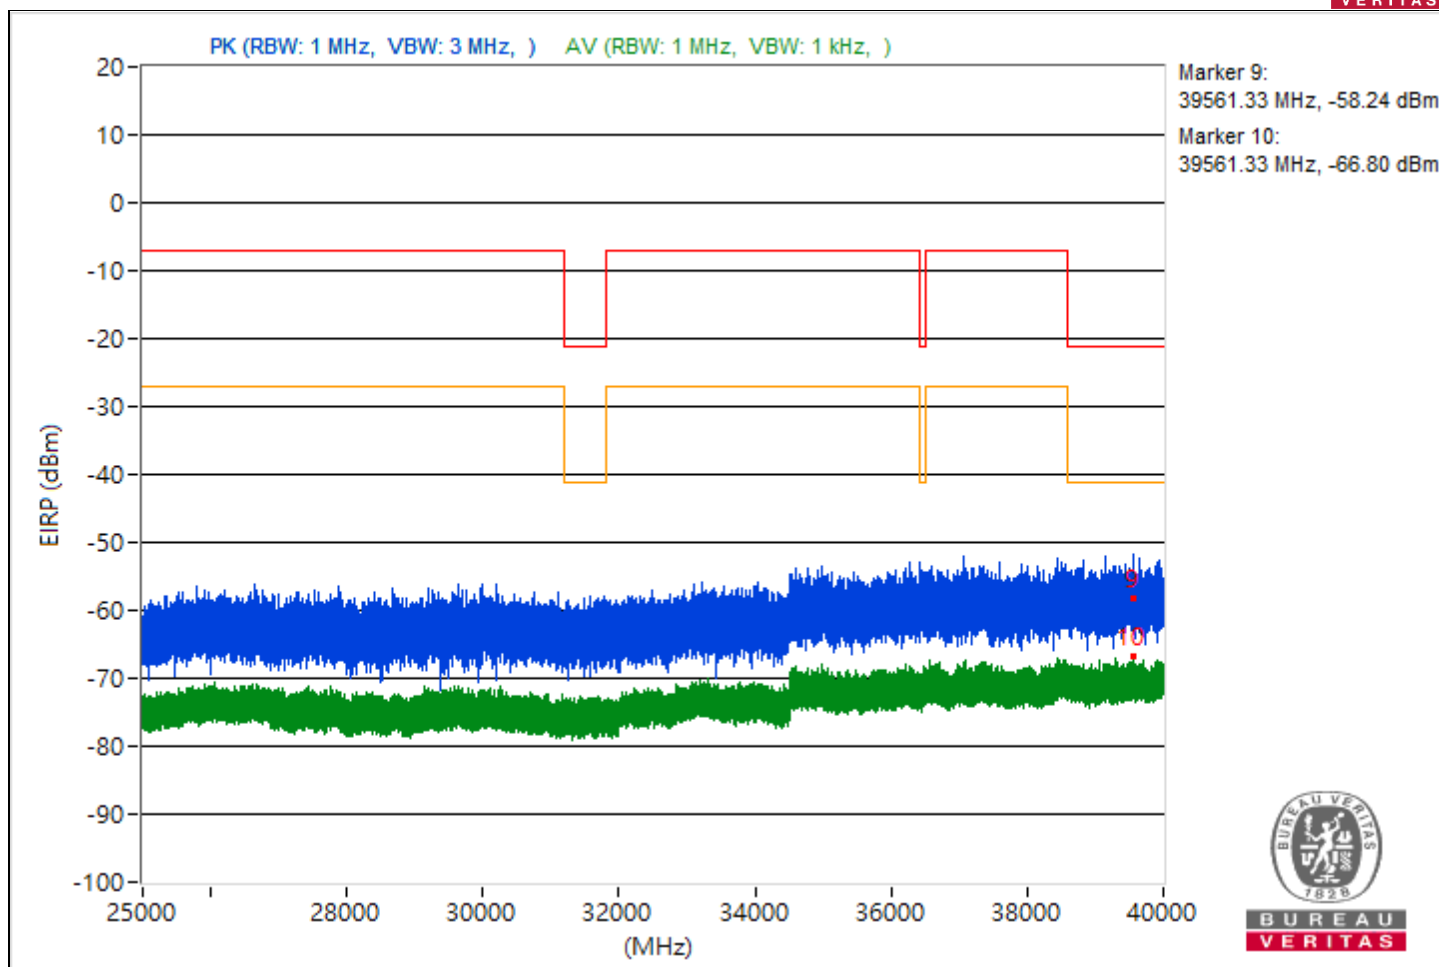


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4827.52	48.88 PK	74	-25.12	-51.54	5.16	-46.38
2	4827.52	29.93 AV	54	-24.07	-70.49	5.16	-65.33
3	10616	50.17 PK	74	-23.83	-50.25	5.16	-45.09
4	10616	30.1 AV	54	-23.9	-70.32	5.16	-65.16
5	19108.2	47 PK	74	-27	-53.42	5.16	-48.26
6	19108.2	32.09 AV	54	-21.91	-68.33	5.16	-63.17
7	23993.5	52.34 PK	74	-21.66	-48.08	5.16	-42.92
8	23993.5	33.45 AV	54	-20.55	-66.97	5.16	-61.81
9	39987.29	36.96 PK	74	-37.04	-63.46	5.16	-58.3
10	39987.29	28.05 AV	54	-25.95	-72.37	5.16	-67.21

Note: Margin value = Emission Level - Limit value

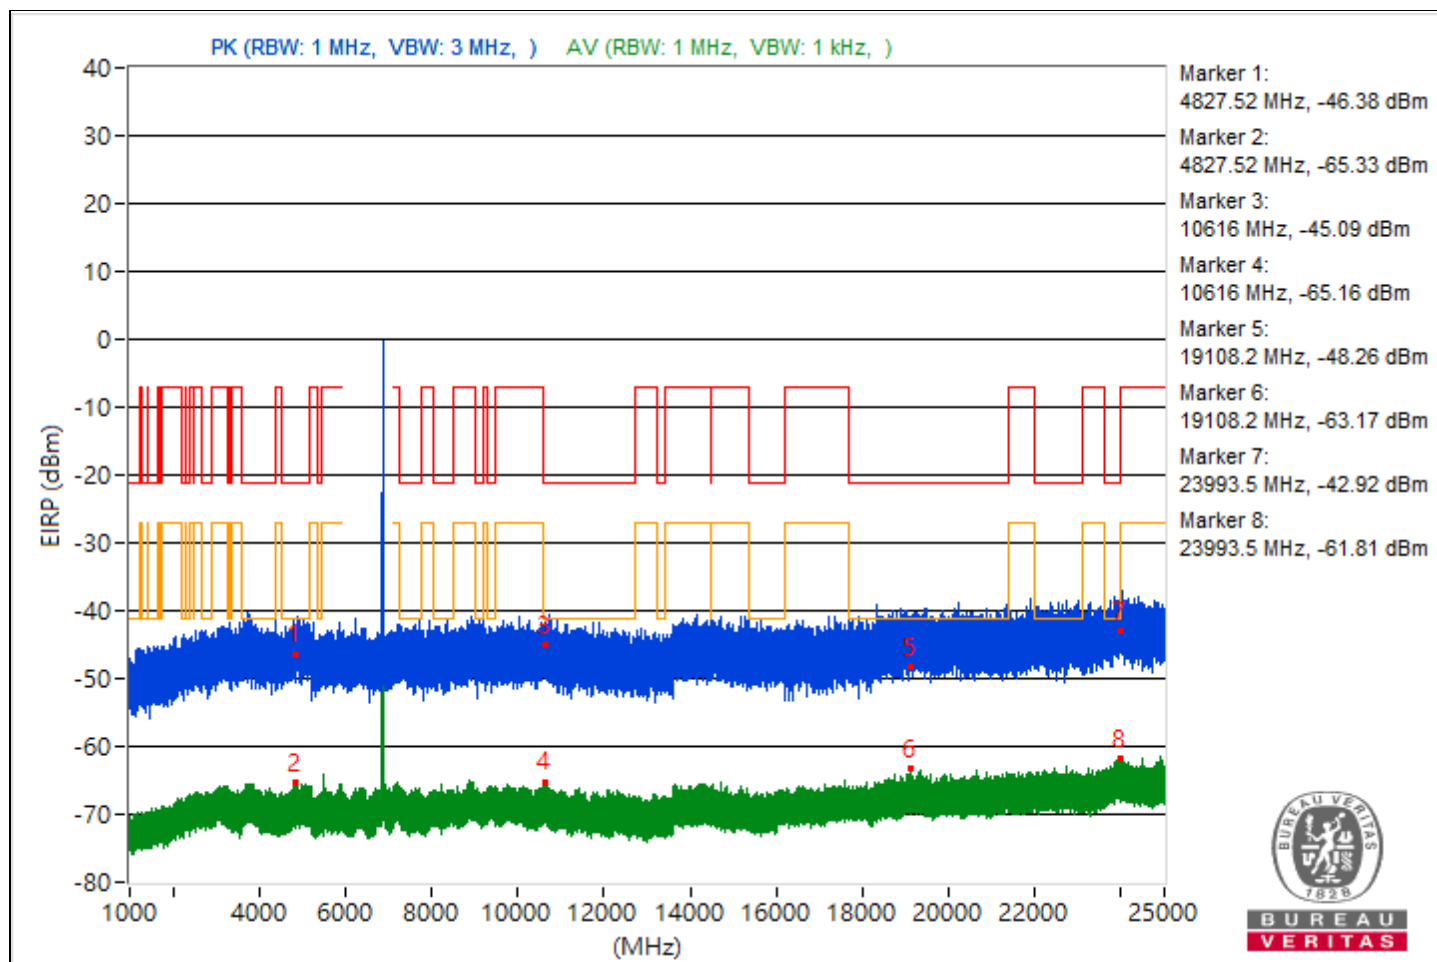


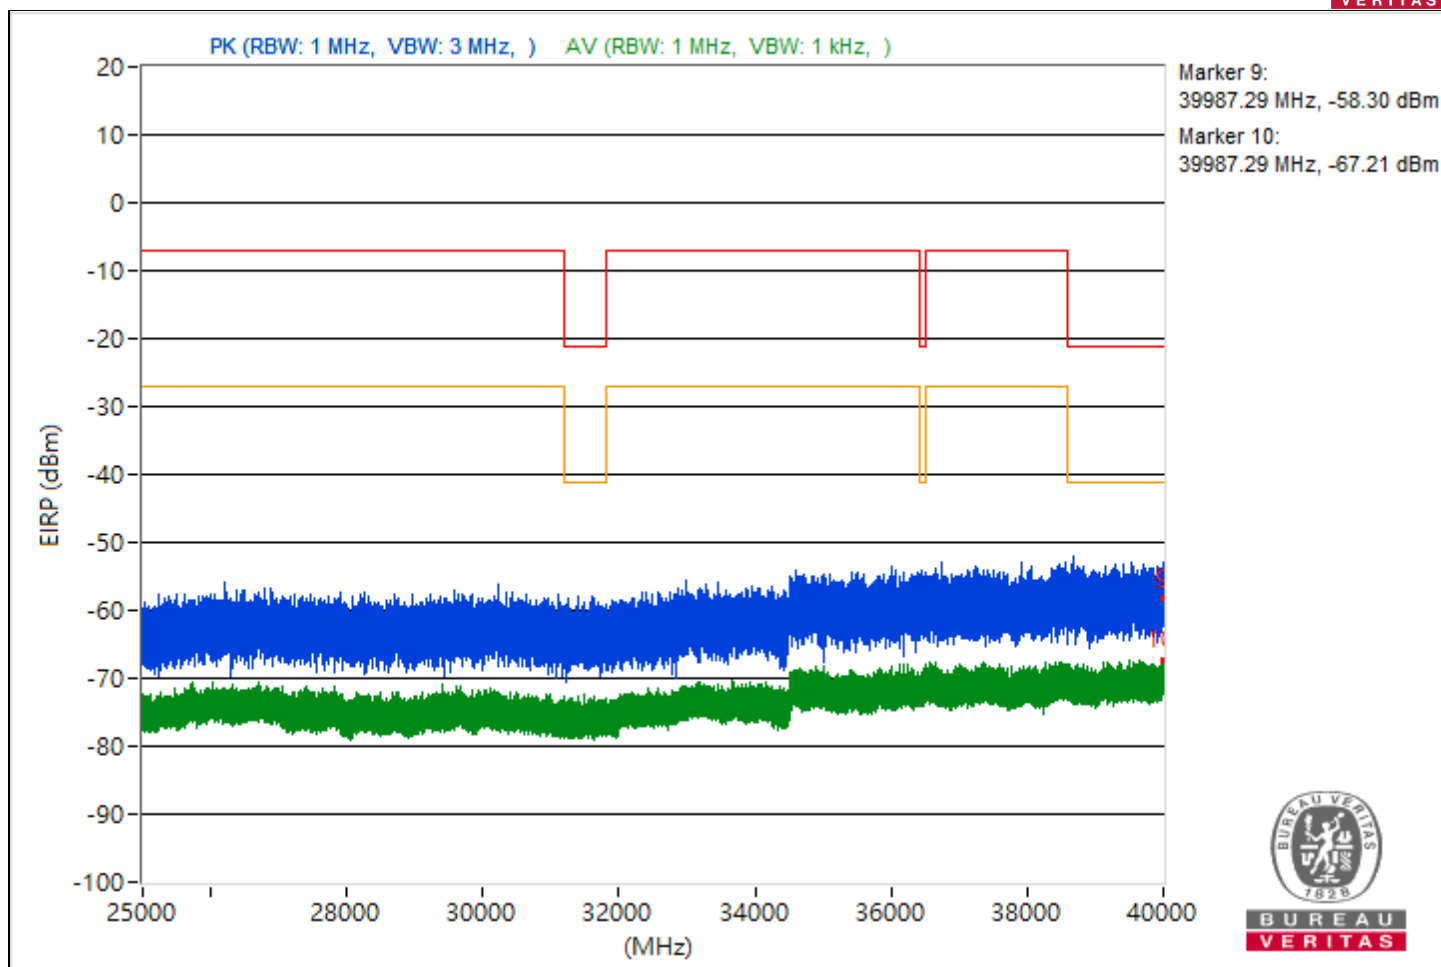


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5051.6	49.82 PK	74	-24.18	-50.6	5.16	-45.44
2	5051.6	30.39 AV	54	-23.61	-70.03	5.16	-64.87
3	9337.87	48.59 PK	74	-25.41	-51.83	5.16	-46.67
4	9337.87	29.91 AV	54	-24.09	-70.51	5.16	-65.35
5	21078.7	49.76 PK	74	-24.24	-50.66	5.16	-45.5
6	21078.7	31.72 AV	54	-22.28	-68.7	5.16	-63.54
7	23979.4	50.79 PK	74	-23.21	-49.63	5.16	-44.47
8	23979.4	33.24 AV	54	-20.76	-67.18	5.16	-62.02
9	38632.89	36.88 PK	74	-37.12	-63.54	5.16	-58.38
10	38632.89	28.37 AV	54	-25.63	-72.05	5.16	-66.89

Note: Margin value = Emission Level - Limit value

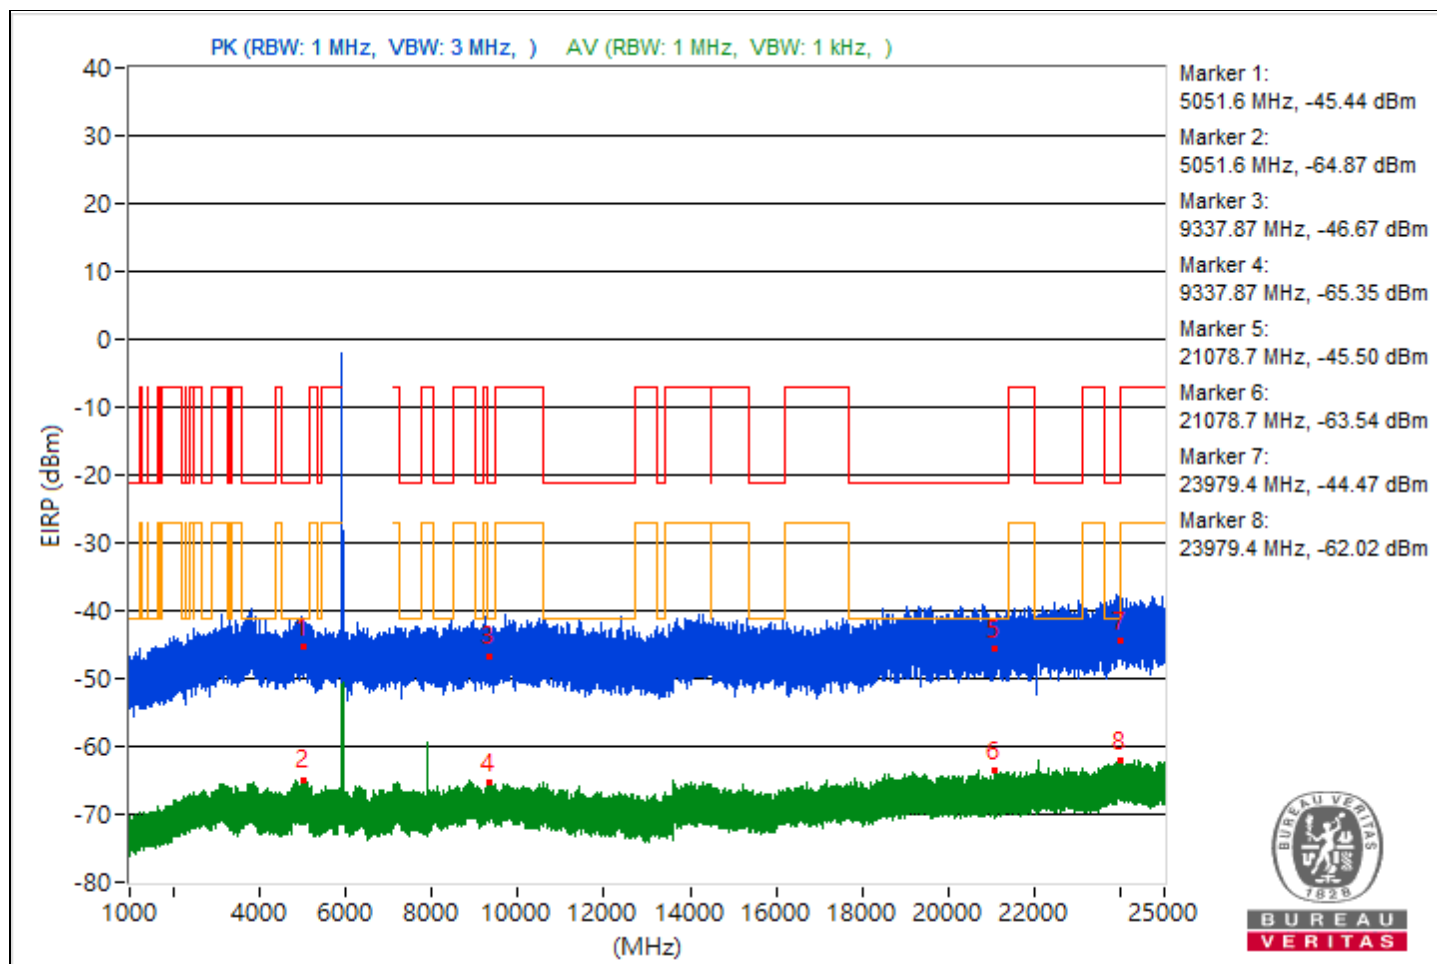


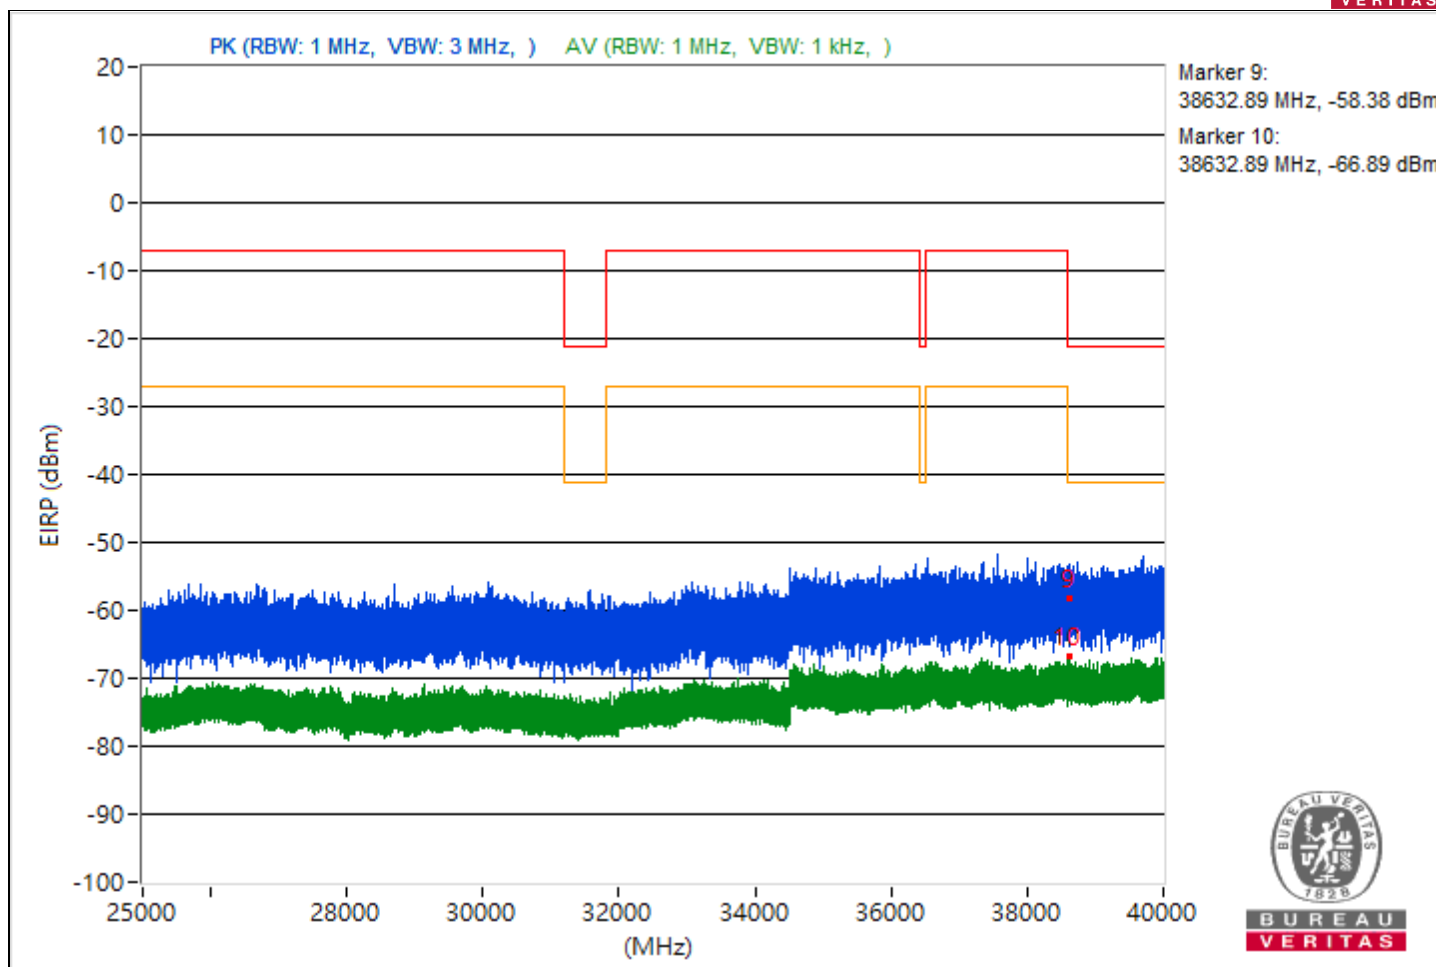


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4894.41	50.78 PK	74	-23.22	-49.64	5.16	-44.48
2	4894.41	30.72 AV	54	-23.28	-69.7	5.16	-64.54
3	8059.38	50.31 PK	74	-23.69	-50.11	5.16	-44.95
4	8059.38	29.7 AV	54	-24.3	-70.72	5.16	-65.56
5	19021.2	49.46 PK	74	-24.54	-50.96	5.16	-45.8
6	19021.2	31.95 AV	54	-22.05	-68.47	5.16	-63.31
7	23996.4	54.24 PK	74	-19.76	-46.18	5.16	-41.02
8	23996.4	33.42 AV	54	-20.58	-67	5.16	-61.84
9	39557.78	34.53 PK	74	-39.47	-65.89	5.16	-60.73
10	39557.78	28.52 AV	54	-25.48	-71.9	5.16	-66.74

Note: Margin value = Emission Level - Limit value

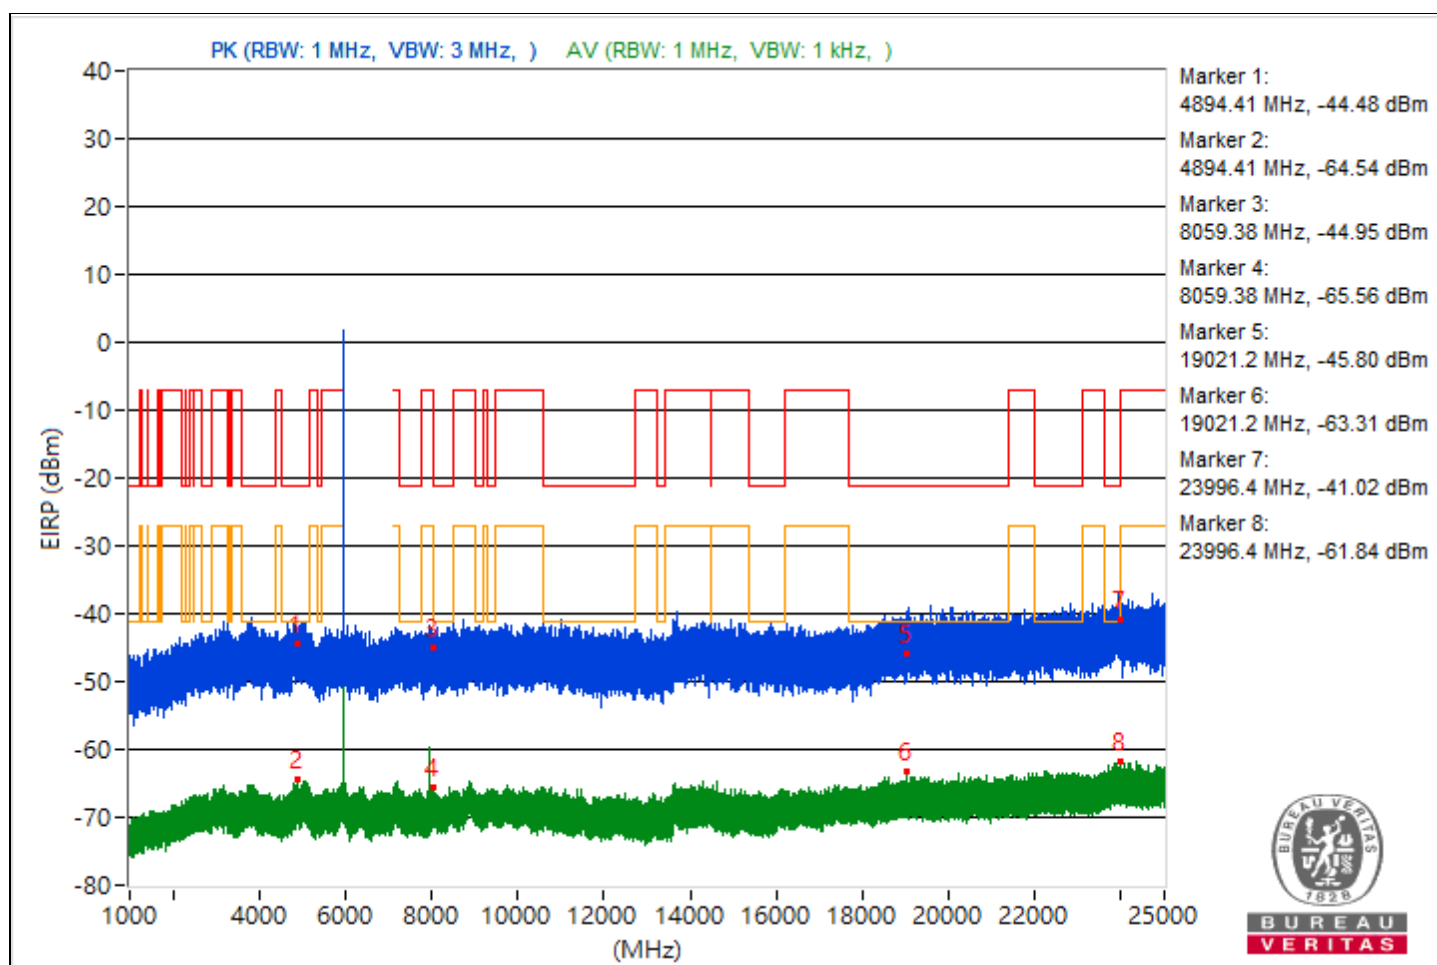


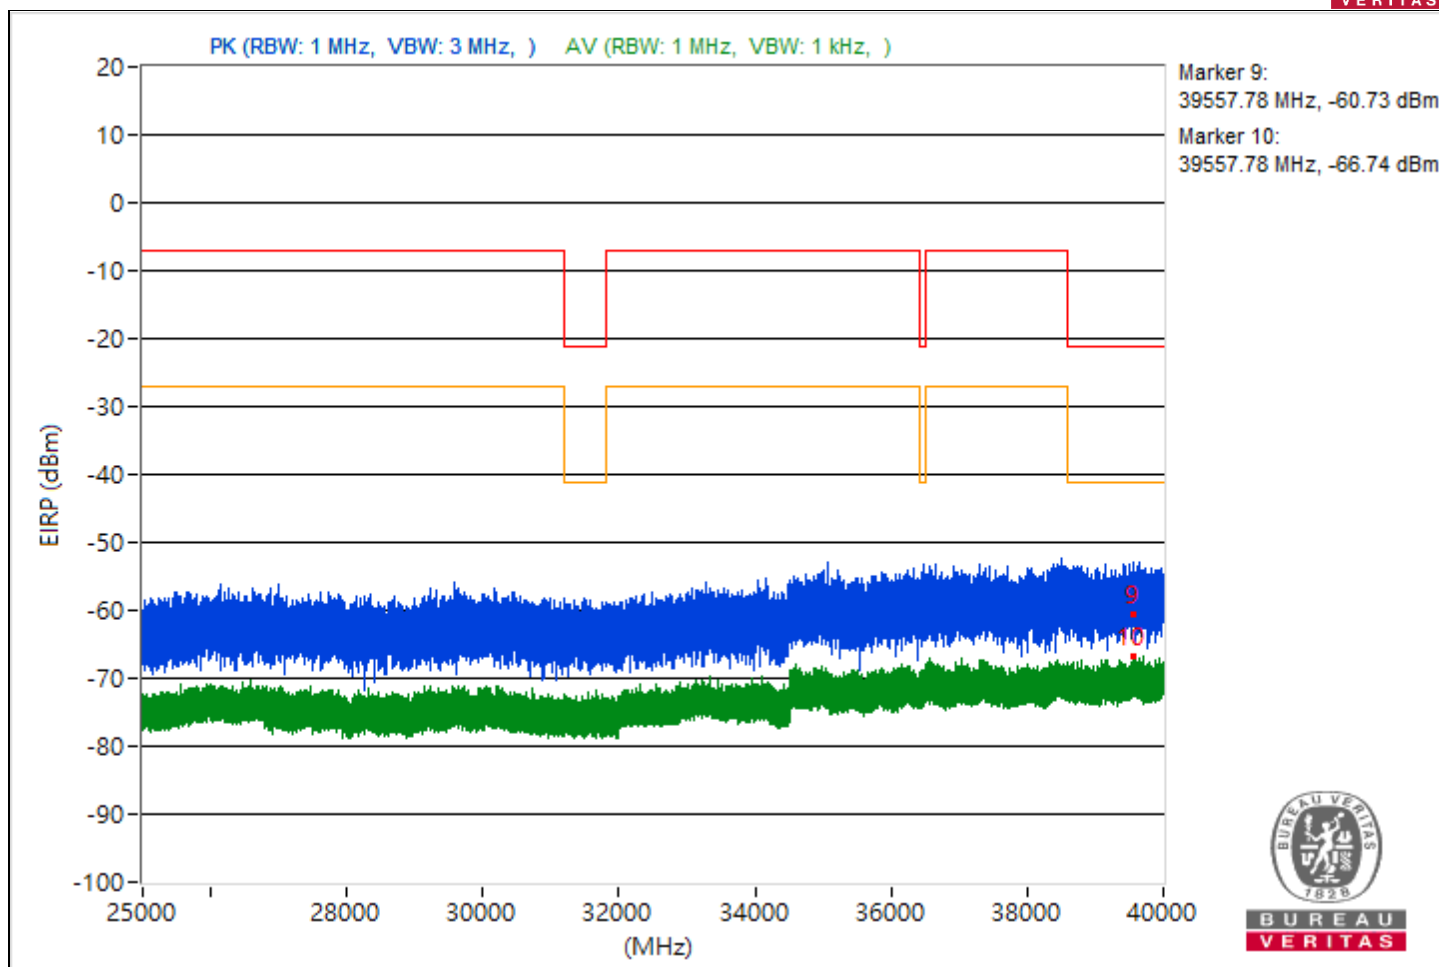


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4902.73	48.72 PK	74	-25.28	-51.7	5.16	-46.54
2	4902.73	30.51 AV	54	-23.49	-69.91	5.16	-64.75
3	9347.56	48.75 PK	74	-25.25	-51.67	5.16	-46.51
4	9347.56	30.21 AV	54	-23.79	-70.21	5.16	-65.05
5	19154.3	50.15 PK	74	-23.85	-50.27	5.16	-45.11
6	19154.3	31.75 AV	54	-22.25	-68.67	5.16	-63.51
7	23936.8	53.65 PK	74	-20.35	-46.77	5.16	-41.61
8	23936.8	33.23 AV	54	-20.77	-67.19	5.16	-62.03
9	39605.96	39.32 PK	74	-34.68	-61.1	5.16	-55.94
10	39605.96	29.16 AV	54	-24.84	-71.26	5.16	-66.1

Note: Margin value = Emission Level - Limit value

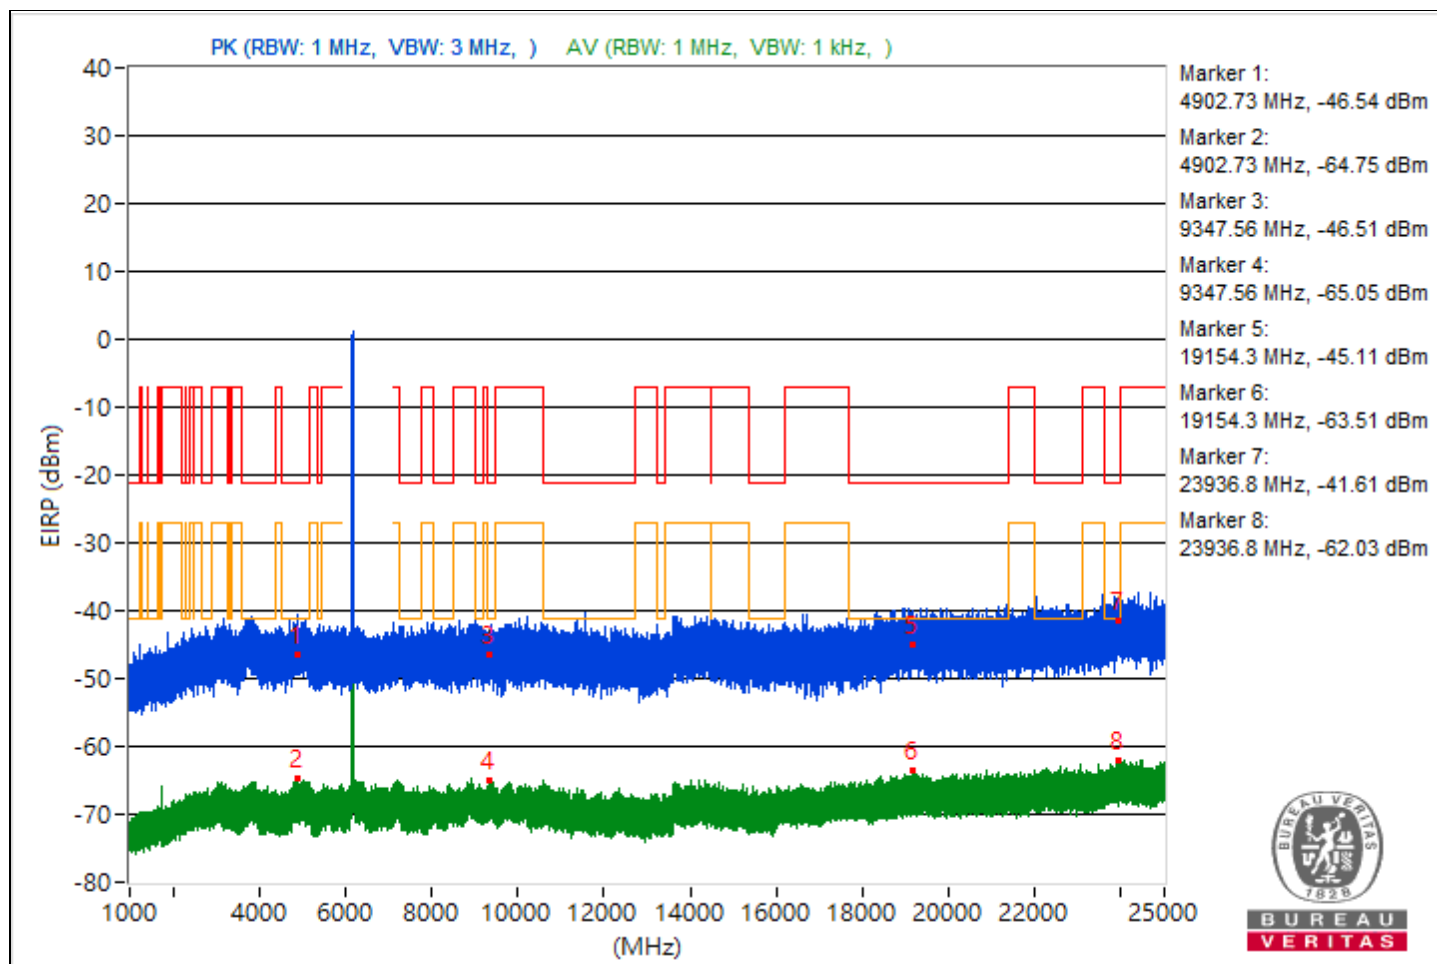


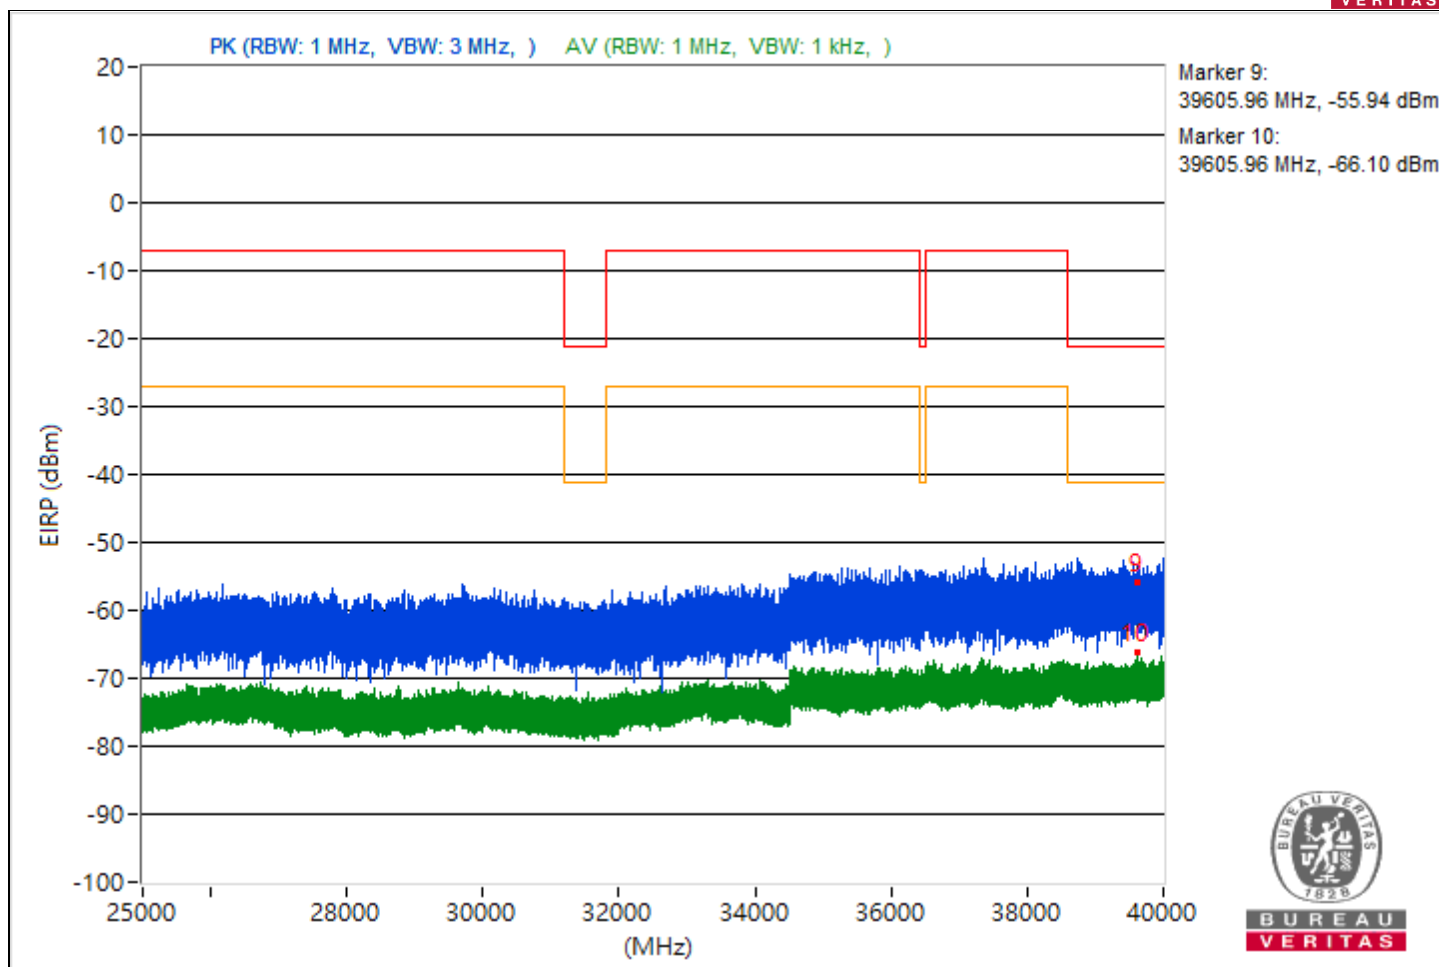


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4830.79	48.61 PK	74	-25.39	-51.81	5.16	-46.65
2	4830.79	30.68 AV	54	-23.32	-69.74	5.16	-64.58
3	10689.42	49.12 PK	74	-24.88	-51.3	5.16	-46.14
4	10689.42	30.18 AV	54	-23.82	-70.24	5.16	-65.08
5	21176.8	50.04 PK	74	-23.96	-50.38	5.16	-45.22
6	21176.8	31.87 AV	54	-22.13	-68.55	5.16	-63.39
7	23929	54.17 PK	74	-19.83	-46.25	5.16	-41.09
8	23929	33.5 AV	54	-20.5	-66.92	5.16	-61.76
9	39676.36	37.46 PK	74	-36.54	-62.96	5.16	-57.8
10	39676.36	28.23 AV	54	-25.77	-72.19	5.16	-67.03

Note: Margin value = Emission Level - Limit value

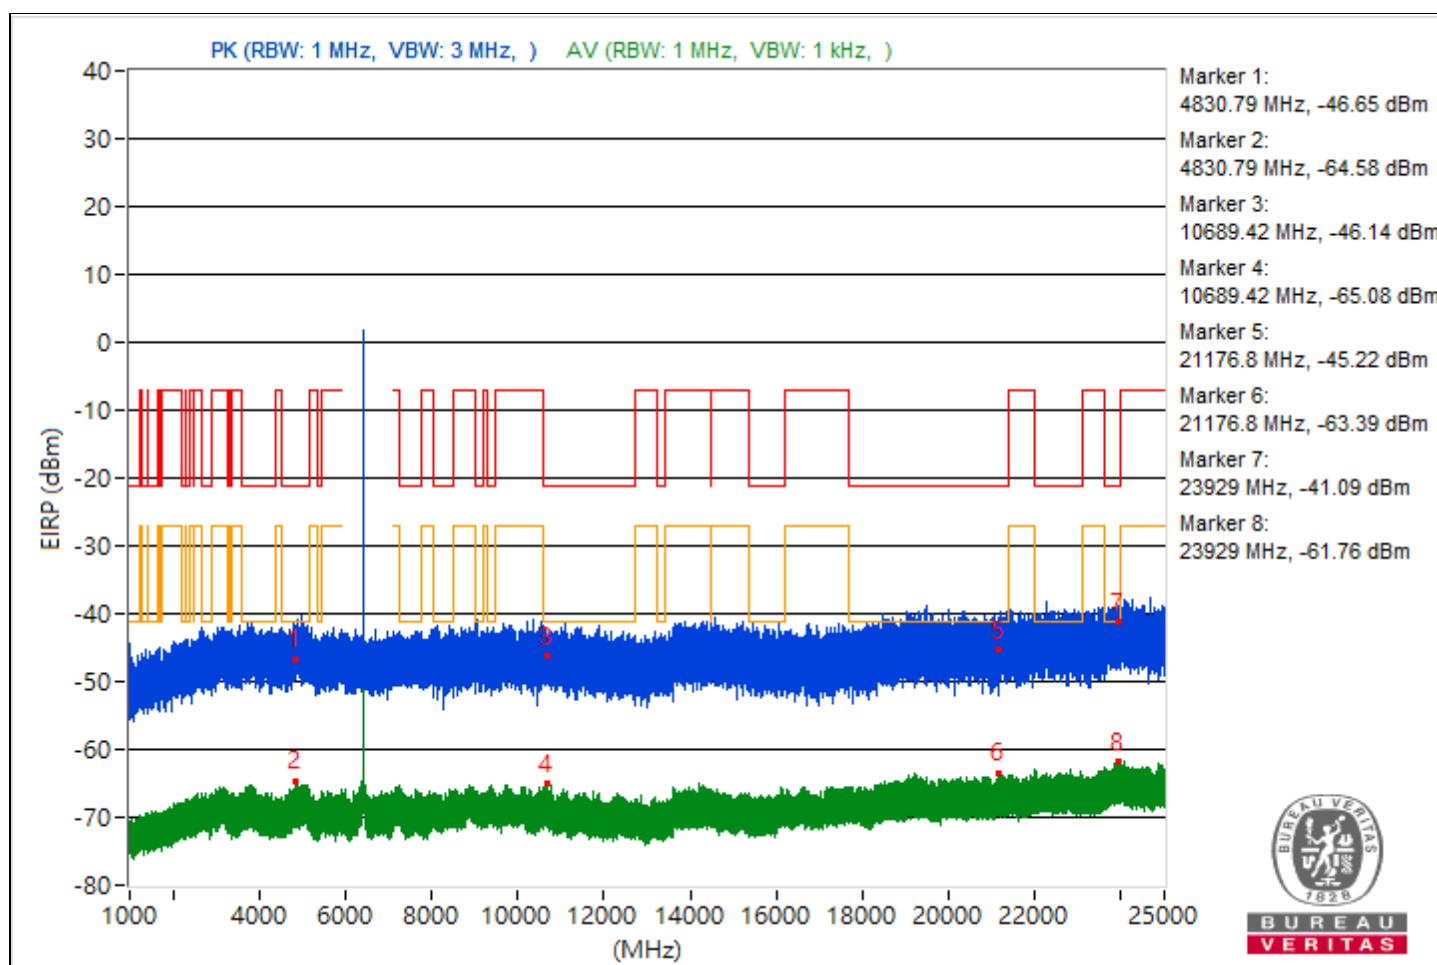


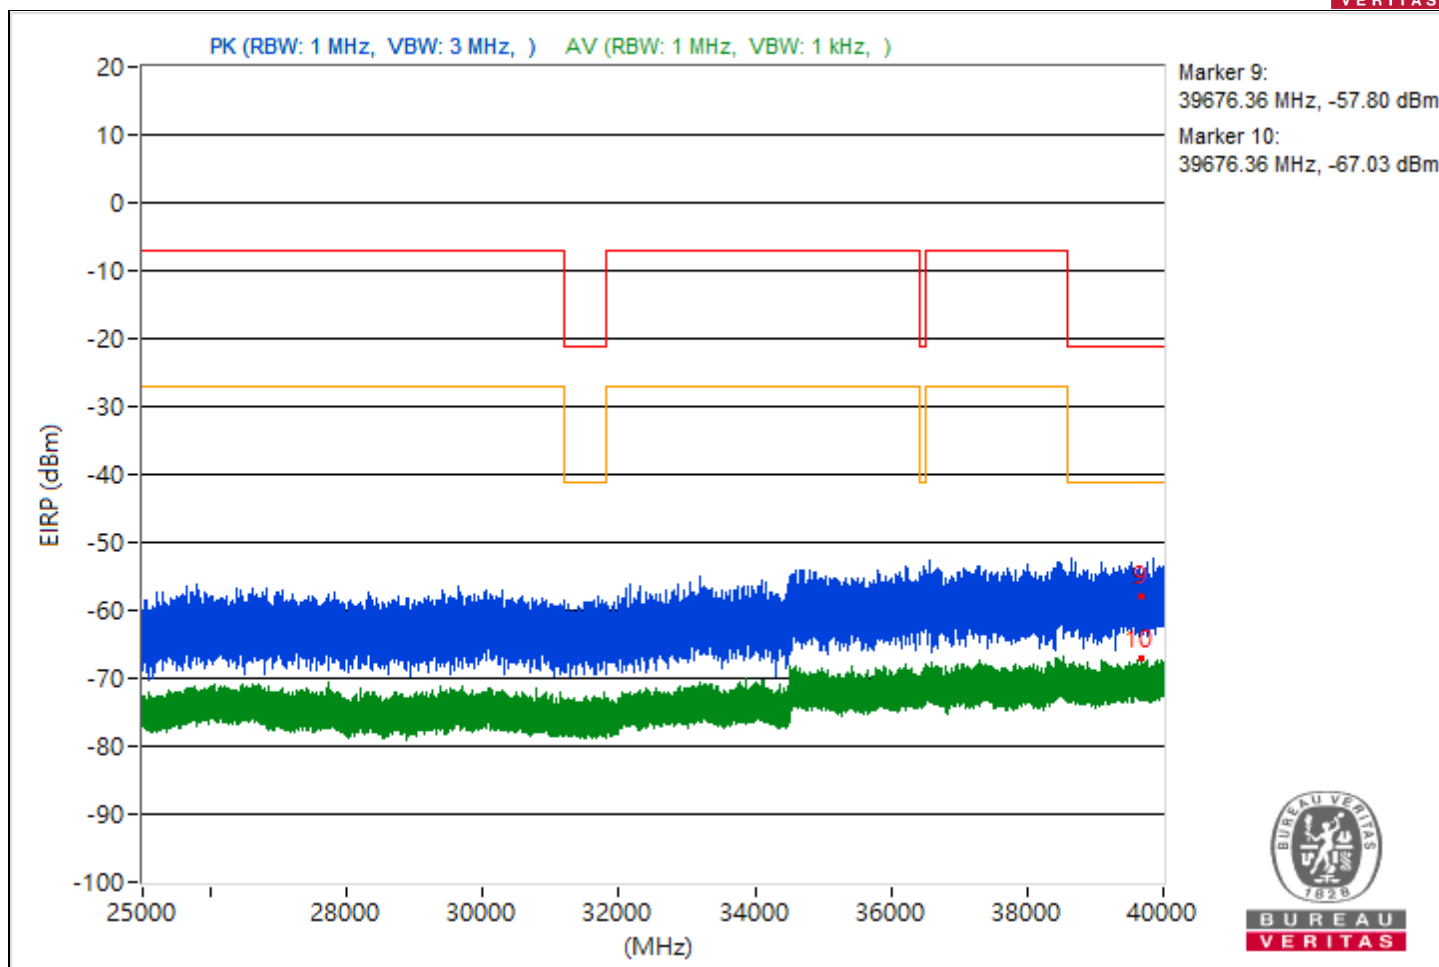


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4916.27	49 PK	74	-25	-51.42	5.16	-46.26
2	4916.27	30.57 AV	54	-23.43	-69.85	5.16	-64.69
3	9352	48.82 PK	74	-25.18	-51.6	5.16	-46.44
4	9352	29.96 AV	54	-24.04	-70.46	5.16	-65.3
5	20599.7	51.46 PK	74	-22.54	-48.96	5.16	-43.8
6	20599.7	31.92 AV	54	-22.08	-68.5	5.16	-63.34
7	23956.6	52.67 PK	74	-21.33	-47.75	5.16	-42.59
8	23956.6	33.1 AV	54	-20.9	-67.32	5.16	-62.16
9	39184.09	36.73 PK	74	-37.27	-63.69	5.16	-58.53
10	39184.09	28.39 AV	54	-25.61	-72.03	5.16	-66.87

Note: Margin value = Emission Level - Limit value

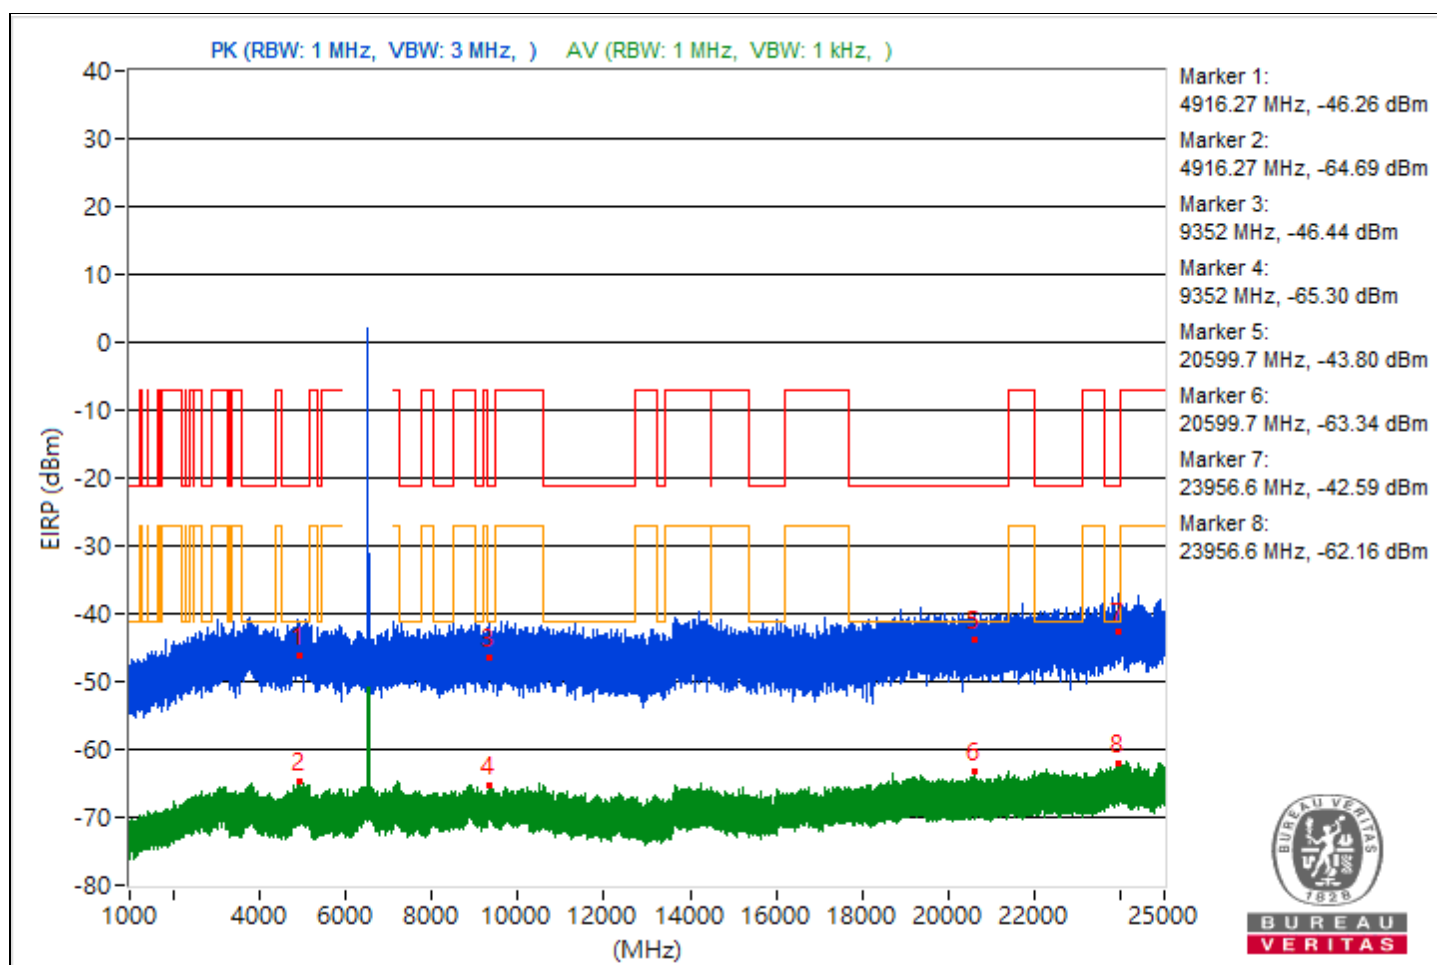


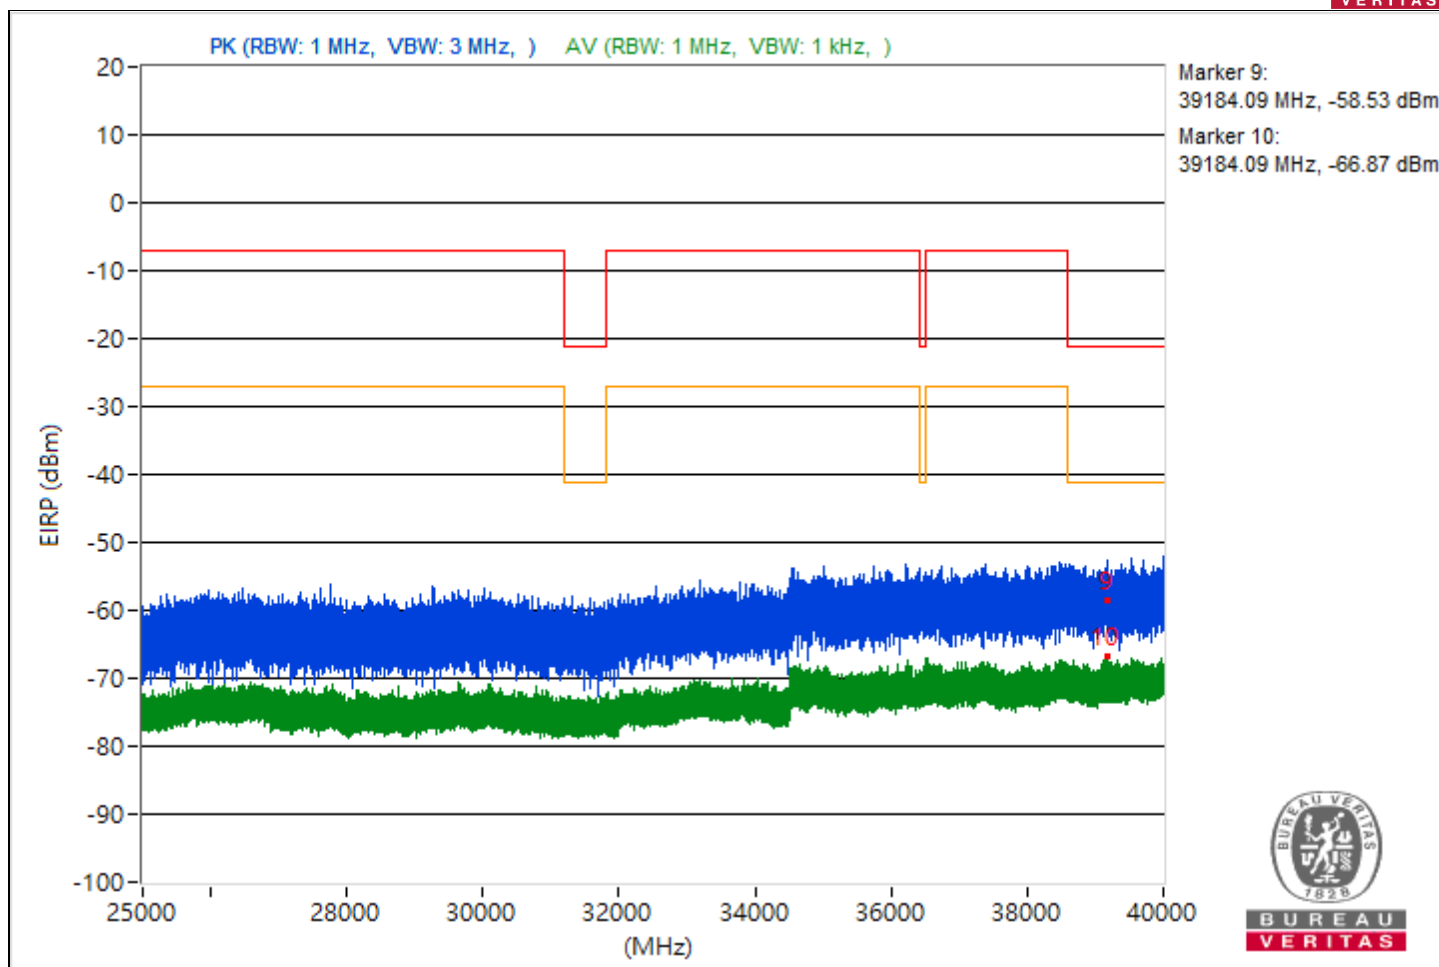


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4897.06	51.29 PK	74	-22.71	-49.13	5.16	-43.97
2	4897.06	30.7 AV	54	-23.3	-69.72	5.16	-64.56
3	10605.07	50.15 PK	74	-23.85	-50.27	5.16	-45.11
4	10605.07	30.2 AV	54	-23.8	-70.22	5.16	-65.06
5	19325.8	51.98 PK	74	-22.02	-48.44	5.16	-43.28
6	19325.8	31.42 AV	54	-22.58	-69	5.16	-63.84
7	23920	53.05 PK	74	-20.95	-47.37	5.16	-42.21
8	23920	32.83 AV	54	-21.17	-67.59	5.16	-62.43
9	39611.02	35.08 PK	74	-38.92	-65.34	5.16	-60.18
10	39611.02	28.27 AV	54	-25.73	-72.15	5.16	-66.99

Note: Margin value = Emission Level - Limit value

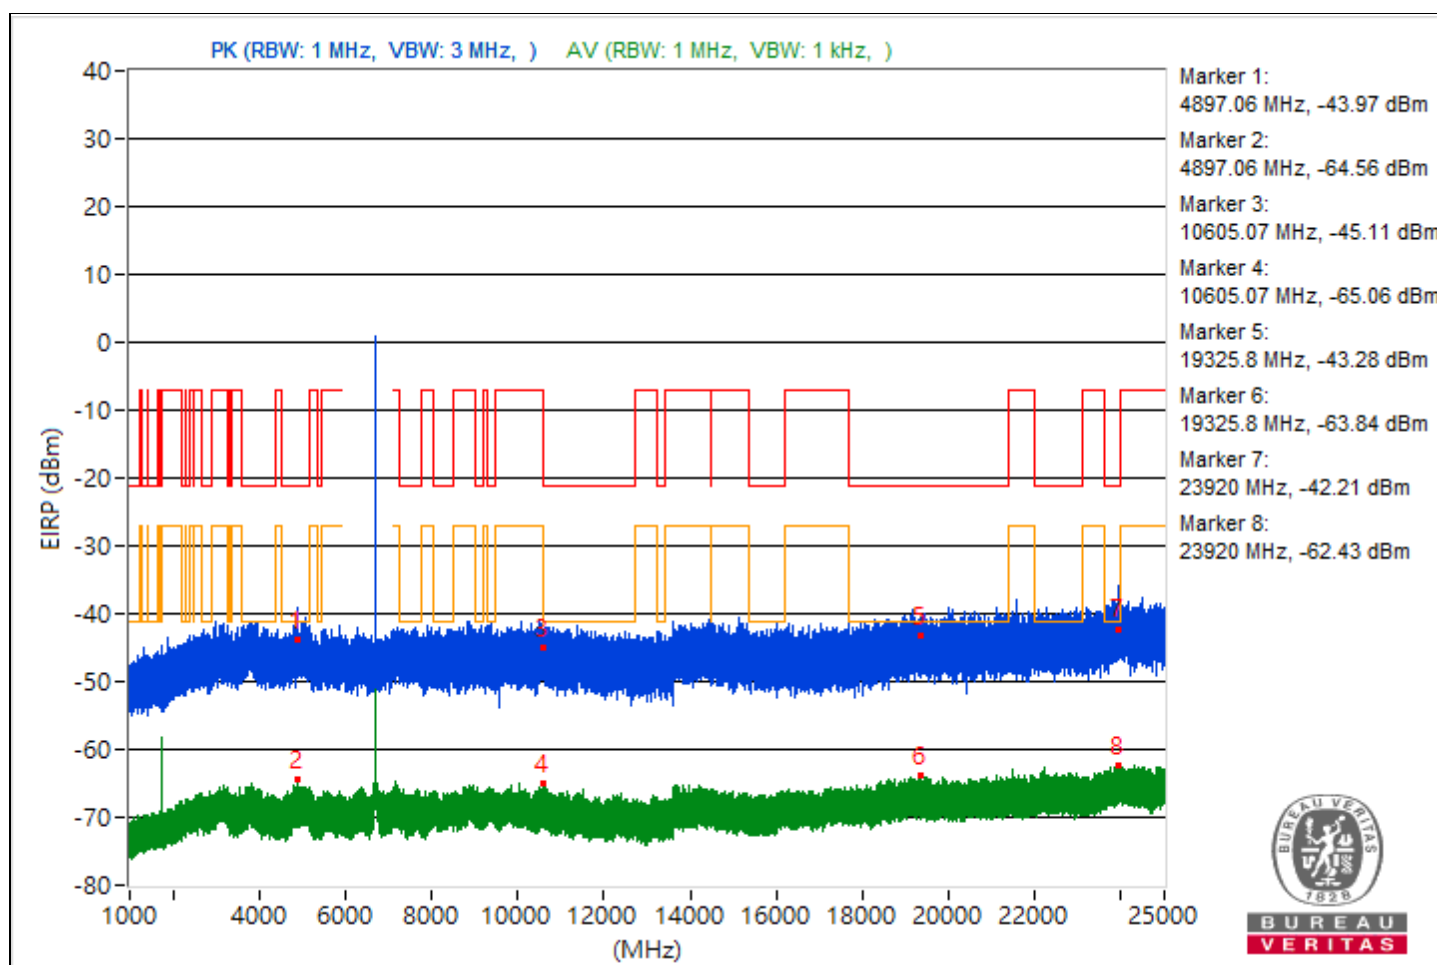


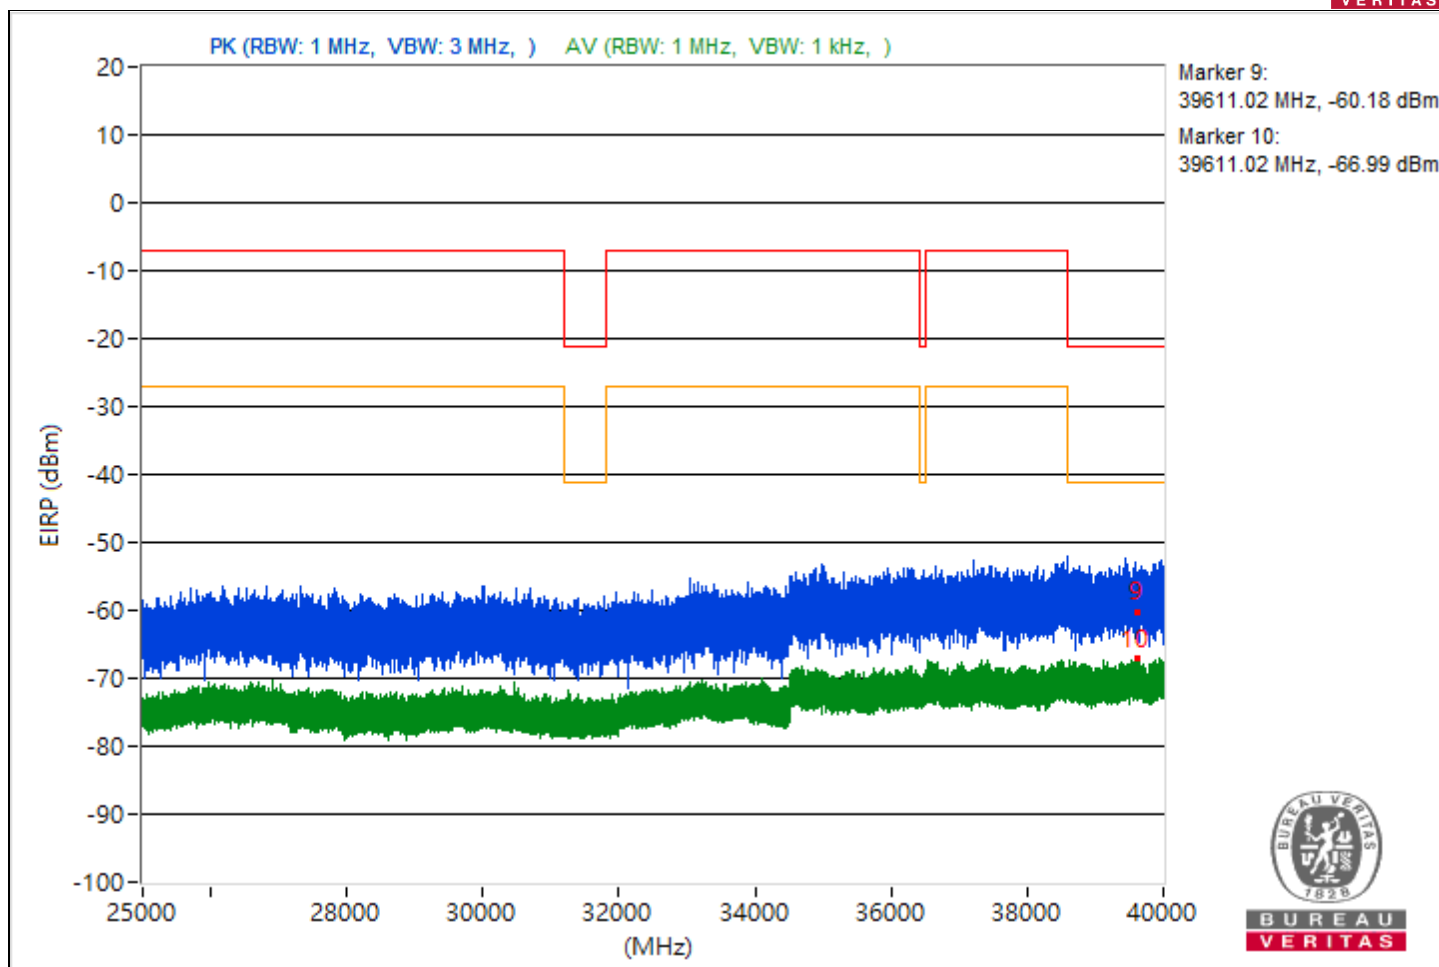


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4902.58	48.58 PK	74	-25.42	-51.84	5.16	-46.68
2	4902.58	30.15 AV	54	-23.85	-70.27	5.16	-65.11
3	9354.58	48.28 PK	74	-25.72	-52.14	5.16	-46.98
4	9354.58	29.91 AV	54	-24.09	-70.51	5.16	-65.35
5	20271	50.92 PK	74	-23.08	-49.5	5.16	-44.34
6	20271	31.48 AV	54	-22.52	-68.94	5.16	-63.78
7	23991	52.02 PK	74	-21.98	-48.4	5.16	-43.24
8	23991	33.56 AV	54	-20.44	-66.86	5.16	-61.7
9	39563.56	39.52 PK	74	-34.48	-60.9	5.16	-55.74
10	39563.56	28.33 AV	54	-25.67	-72.09	5.16	-66.93

Note: Margin value = Emission Level - Limit value

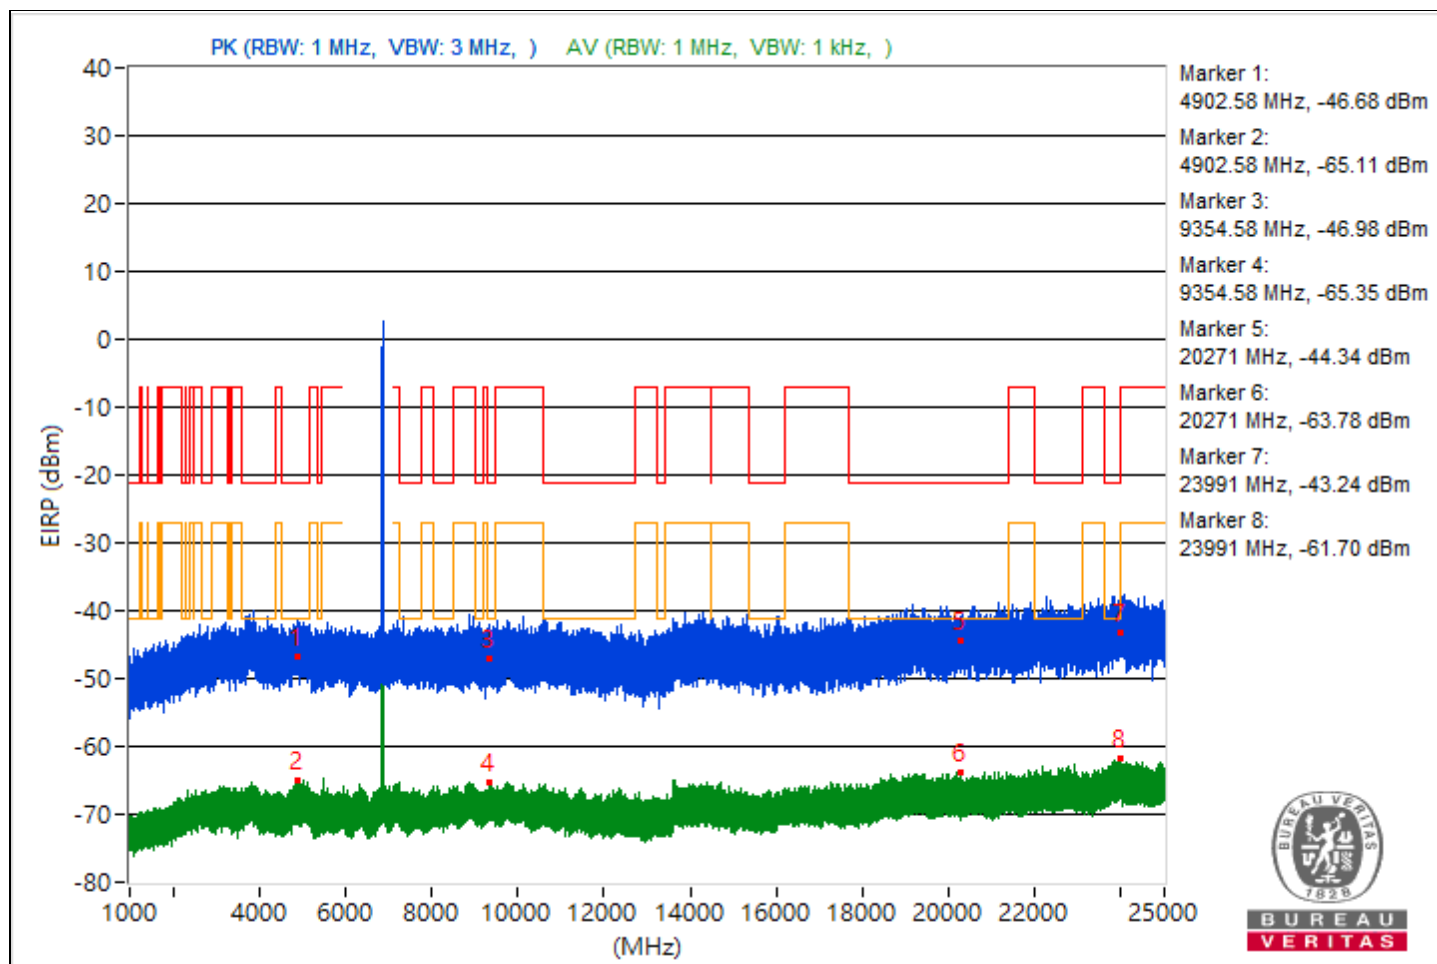


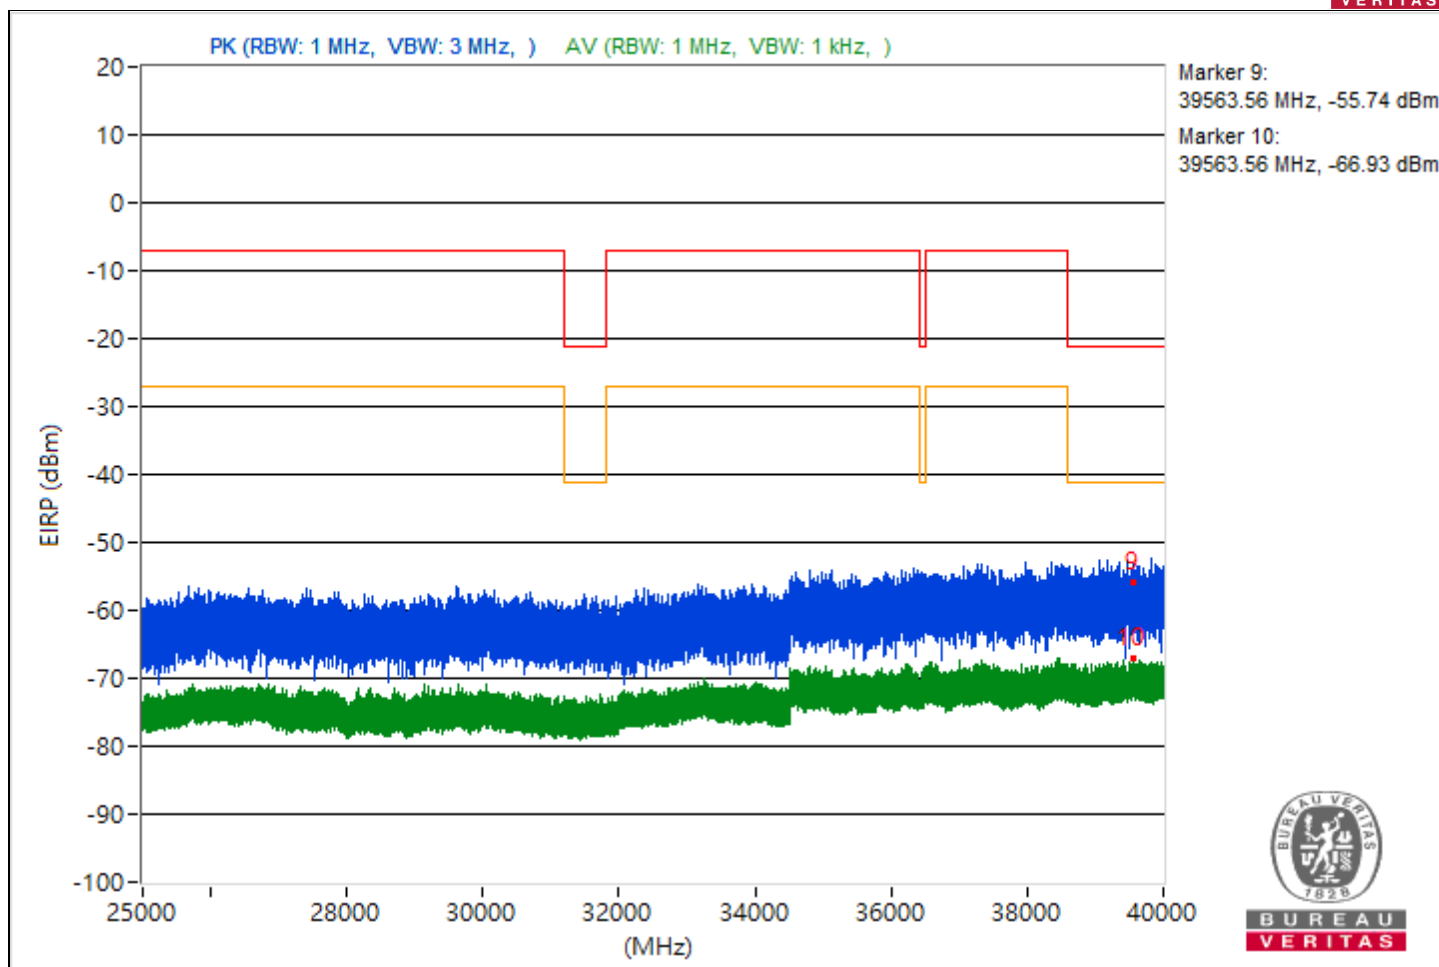


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3767.33	48.15 PK	74	-25.85	-52.27	5.16	-47.11
2	3767.33	30.74 AV	54	-23.26	-69.68	5.16	-64.52
3	8092.98	48.35 PK	74	-25.65	-52.07	5.16	-46.91
4	8092.98	30.06 AV	54	-23.94	-70.36	5.16	-65.2
5	20428.1	51.27 PK	74	-22.73	-49.15	5.16	-43.99
6	20428.1	32.12 AV	54	-21.88	-68.3	5.16	-63.14
7	23927.8	51.2 PK	74	-22.8	-49.22	5.16	-44.06
8	23927.8	33.26 AV	54	-20.74	-67.16	5.16	-62
9	39733.69	38.02 PK	74	-35.98	-62.4	5.16	-57.24
10	39733.69	28.11 AV	54	-25.89	-72.31	5.16	-67.15

Note: Margin value = Emission Level - Limit value

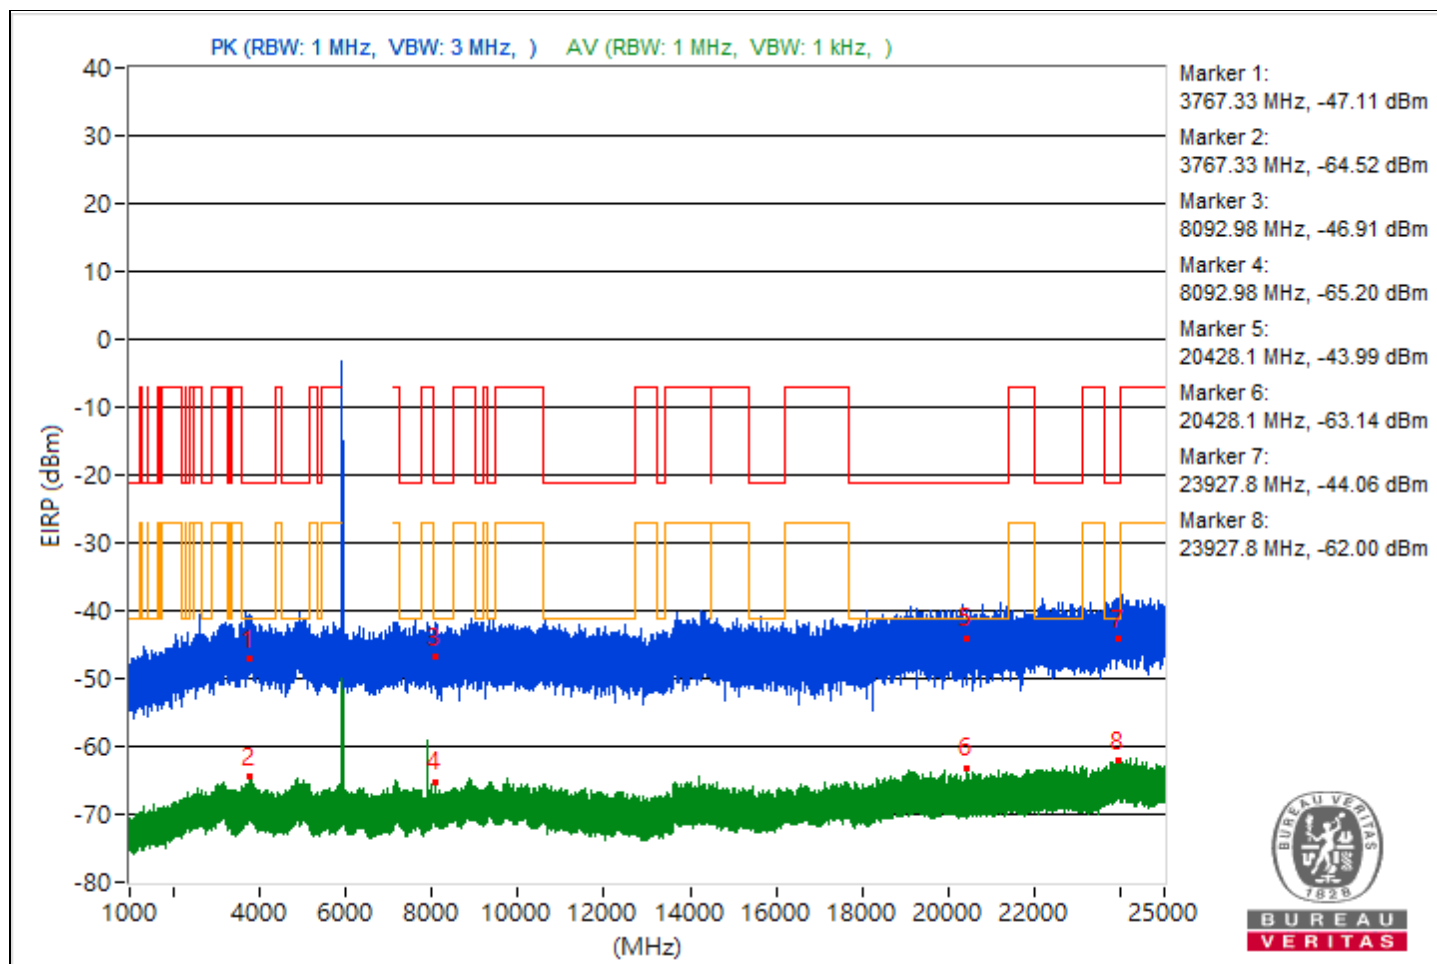


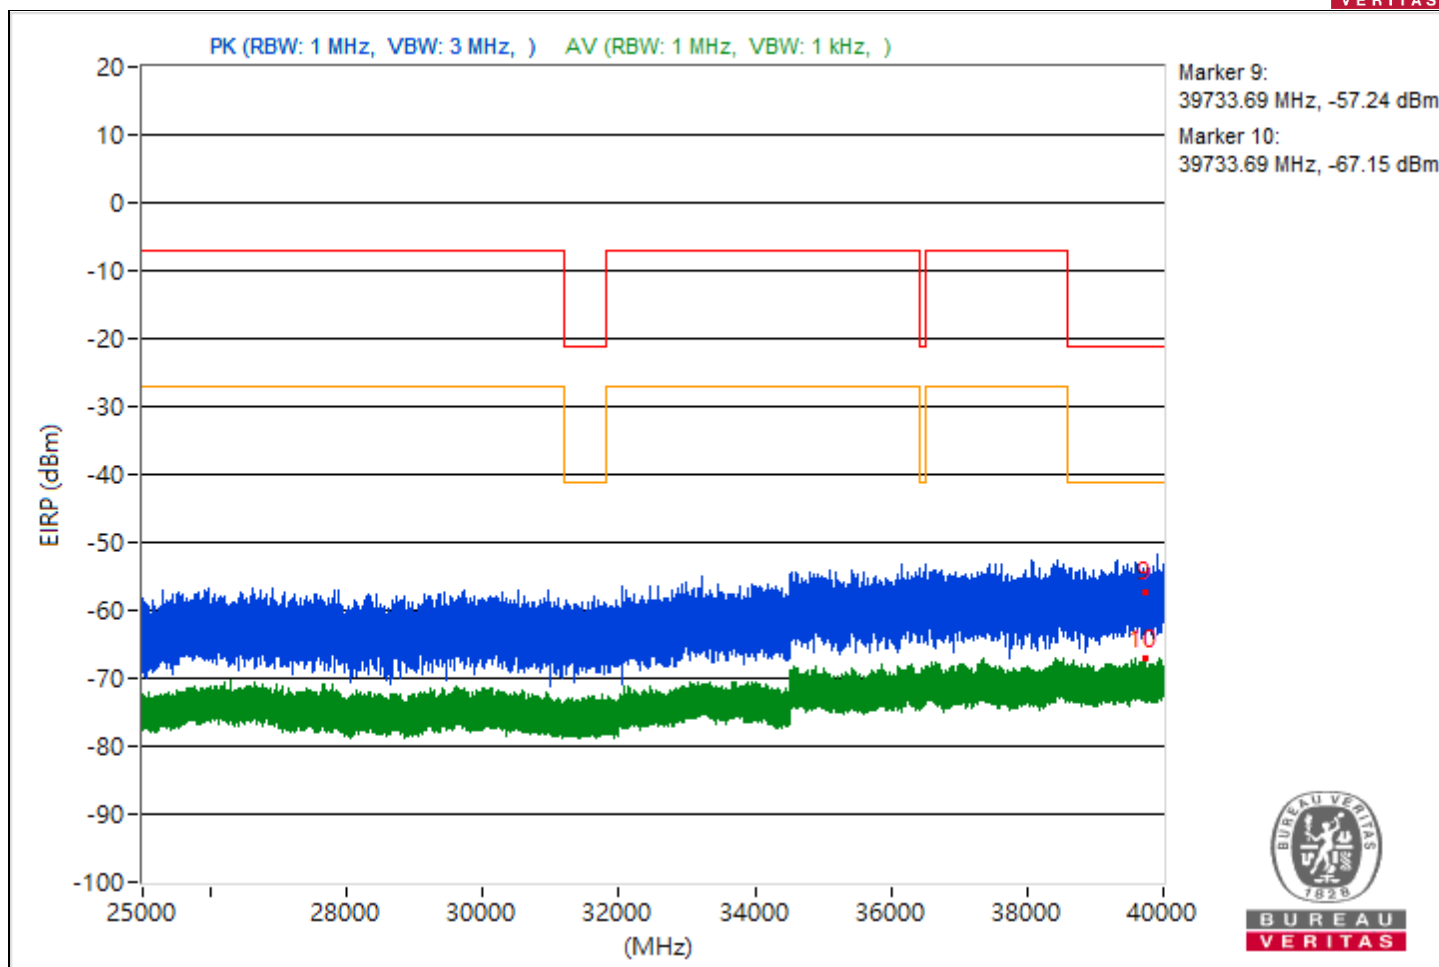


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4910.98	48.28 PK	74	-25.72	-52.14	5.16	-46.98
2	4910.98	30.25 AV	54	-23.75	-70.17	5.16	-65.01
3	9359.38	49.59 PK	74	-24.41	-50.83	5.16	-45.67
4	9359.38	30.05 AV	54	-23.95	-70.37	5.16	-65.21
5	21219.3	50.33 PK	74	-23.67	-50.09	5.16	-44.93
6	21219.3	32.02 AV	54	-21.98	-68.4	5.16	-63.24
7	23872.3	54.38 PK	74	-19.62	-46.04	5.16	-40.88
8	23872.3	33.38 AV	54	-20.62	-67.04	5.16	-61.88
9	39842.13	40.35 PK	74	-33.65	-60.07	5.16	-54.91
10	39842.13	28.39 AV	54	-25.61	-72.03	5.16	-66.87

Note: Margin value = Emission Level - Limit value

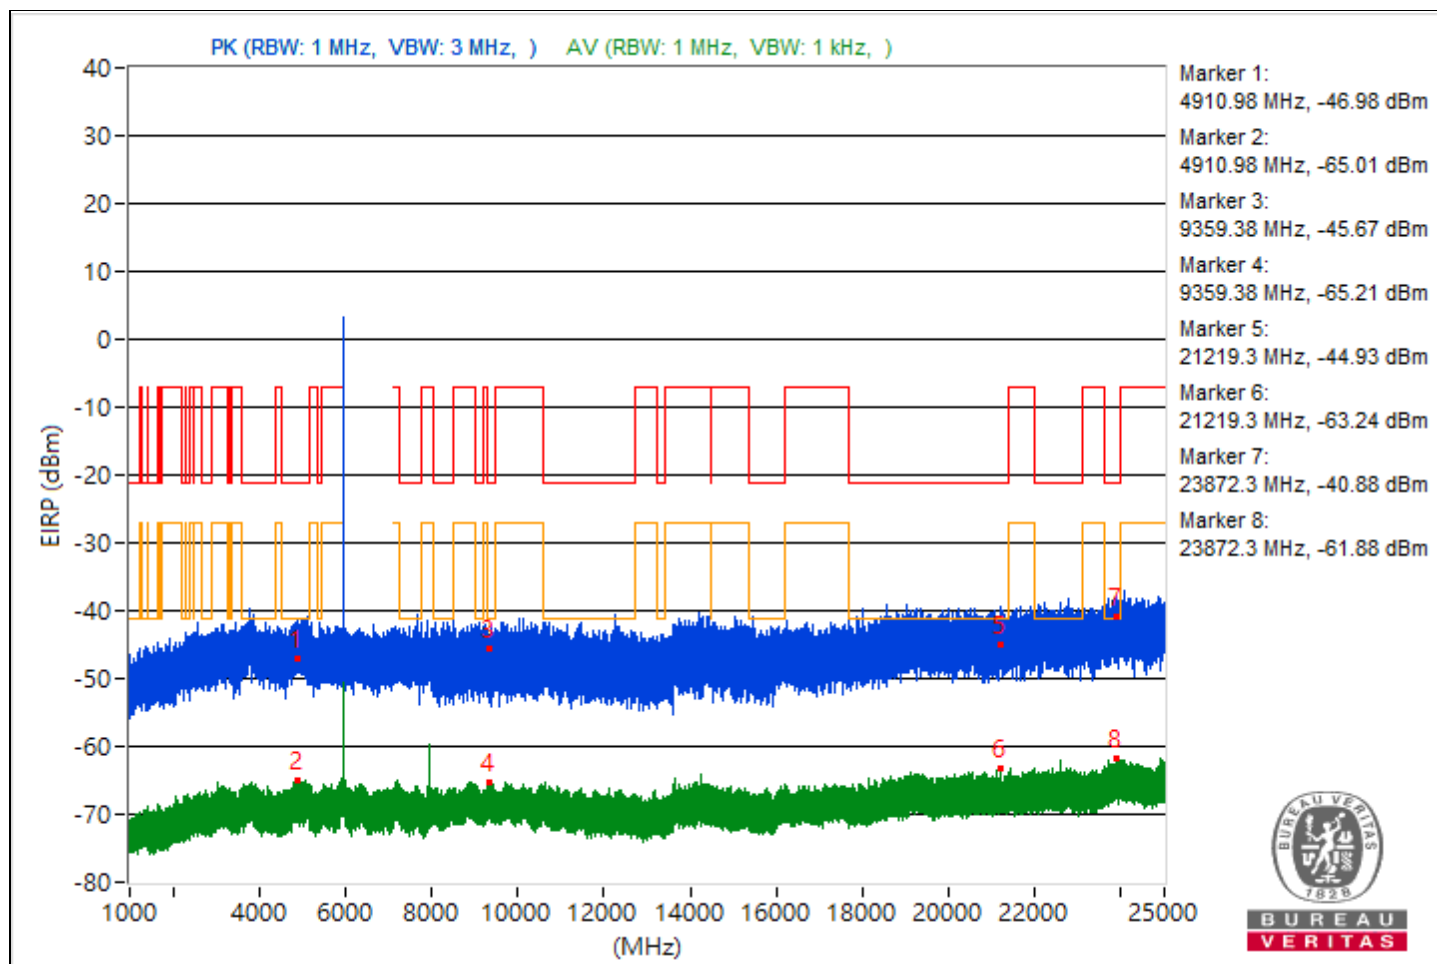


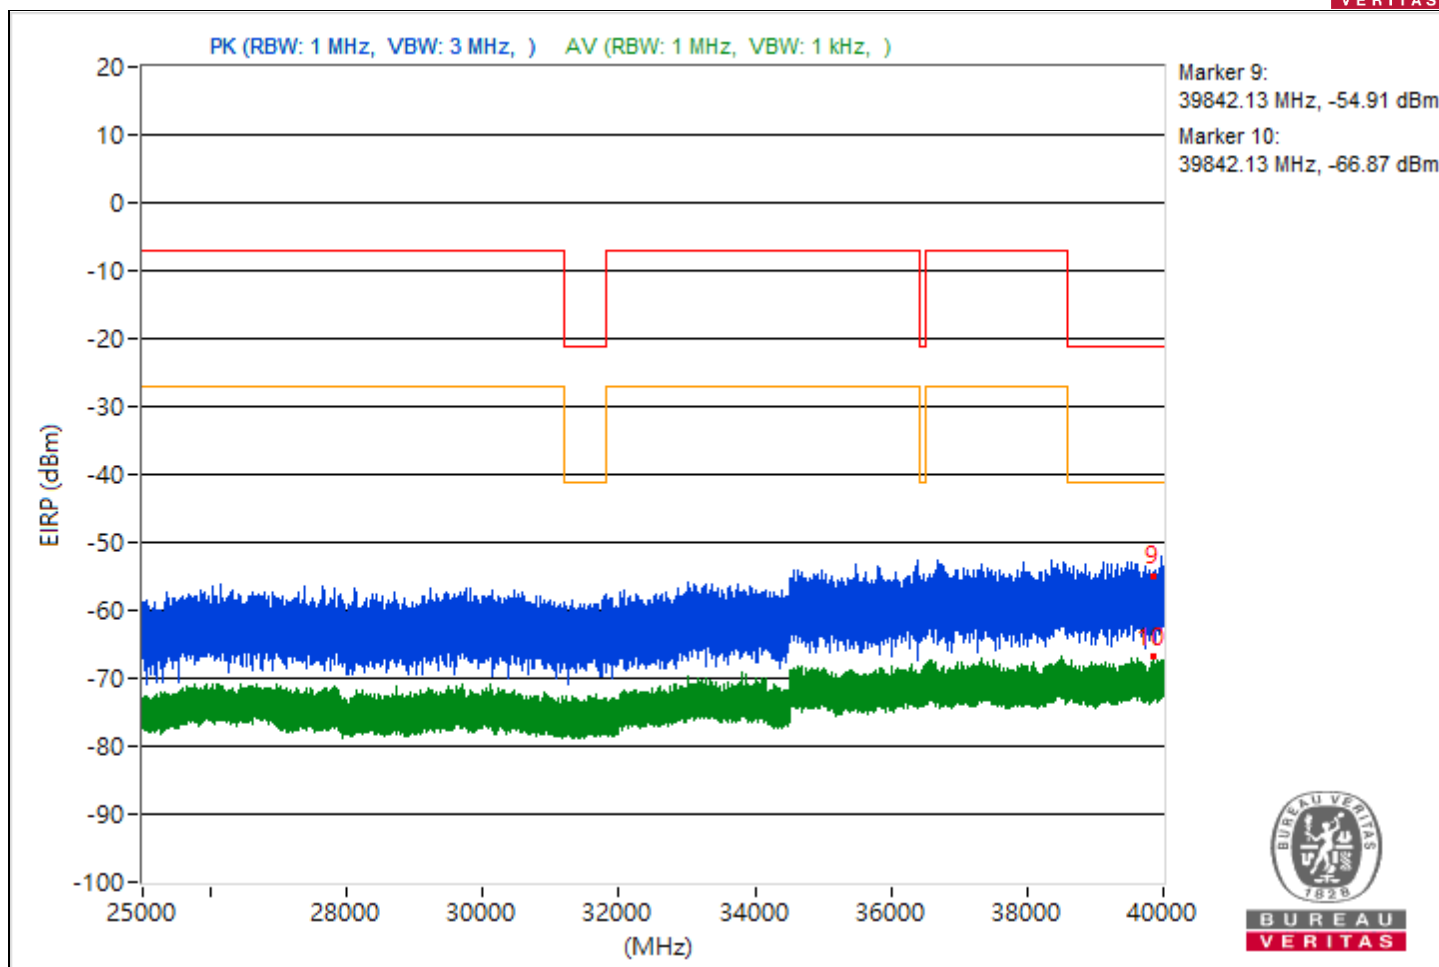


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5005.48	52.43 PK	74	-21.57	-47.99	5.16	-42.83
2	5005.48	30.65 AV	54	-23.35	-69.77	5.16	-64.61
3	9407.56	50.54 PK	74	-23.46	-49.88	5.16	-44.72
4	9407.56	29.71 AV	54	-24.29	-70.71	5.16	-65.55
5	19447.7	52.73 PK	74	-21.27	-47.69	5.16	-42.53
6	19447.7	31.88 AV	54	-22.12	-68.54	5.16	-63.38
7	23862.4	54.12 PK	74	-19.88	-46.3	5.16	-41.14
8	23862.4	33.29 AV	54	-20.71	-67.13	5.16	-61.97
9	39134.93	37.14 PK	74	-36.86	-63.28	5.16	-58.12
10	39134.93	28.45 AV	54	-25.55	-71.97	5.16	-66.81

Note: Margin value = Emission Level - Limit value

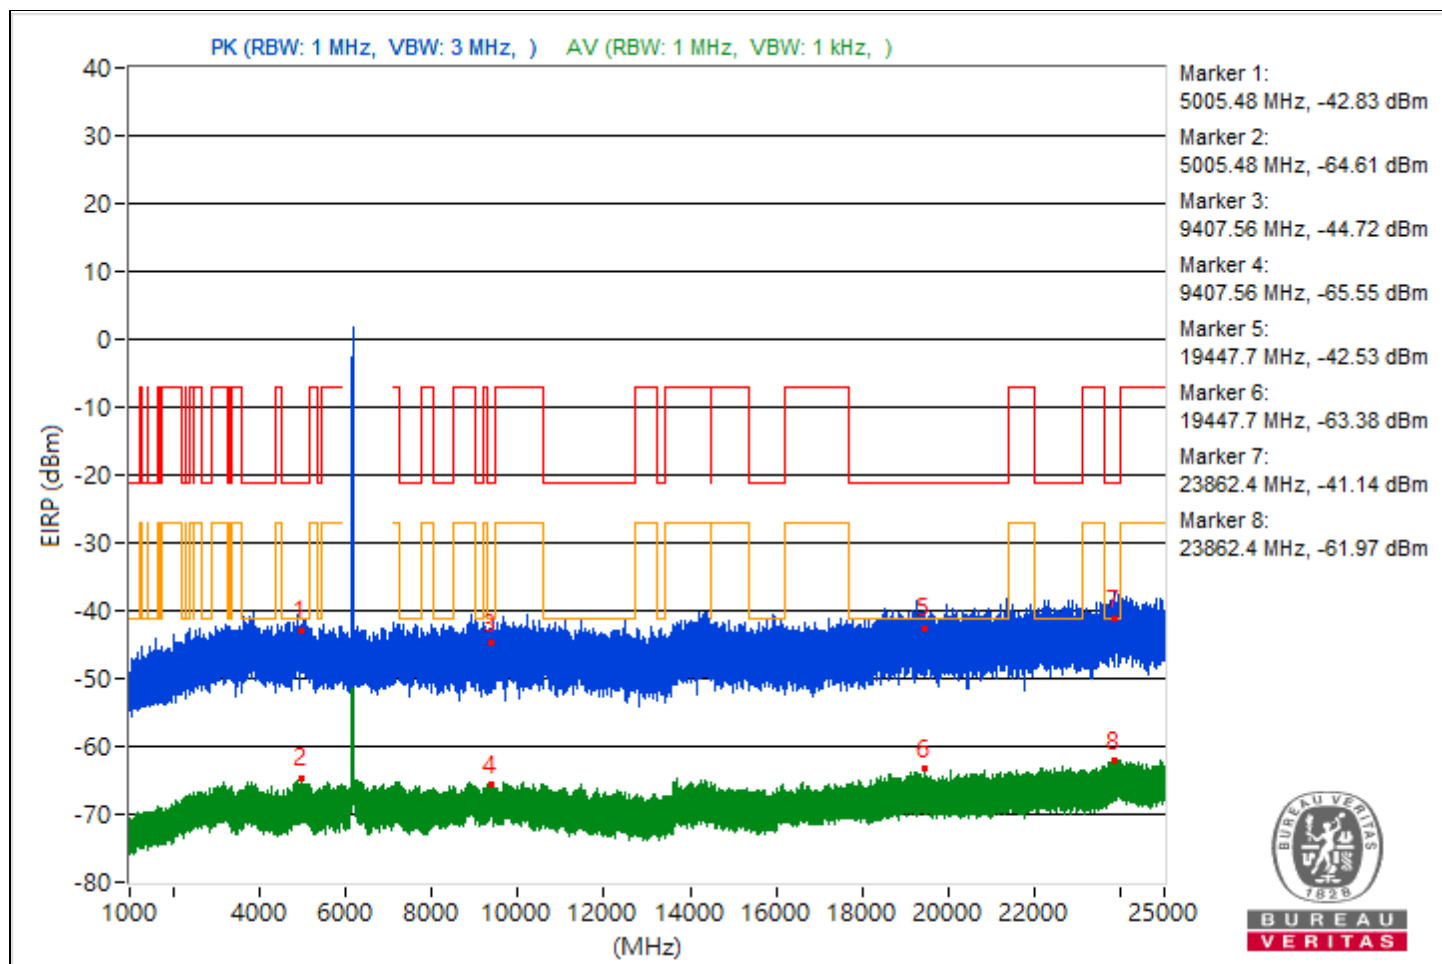


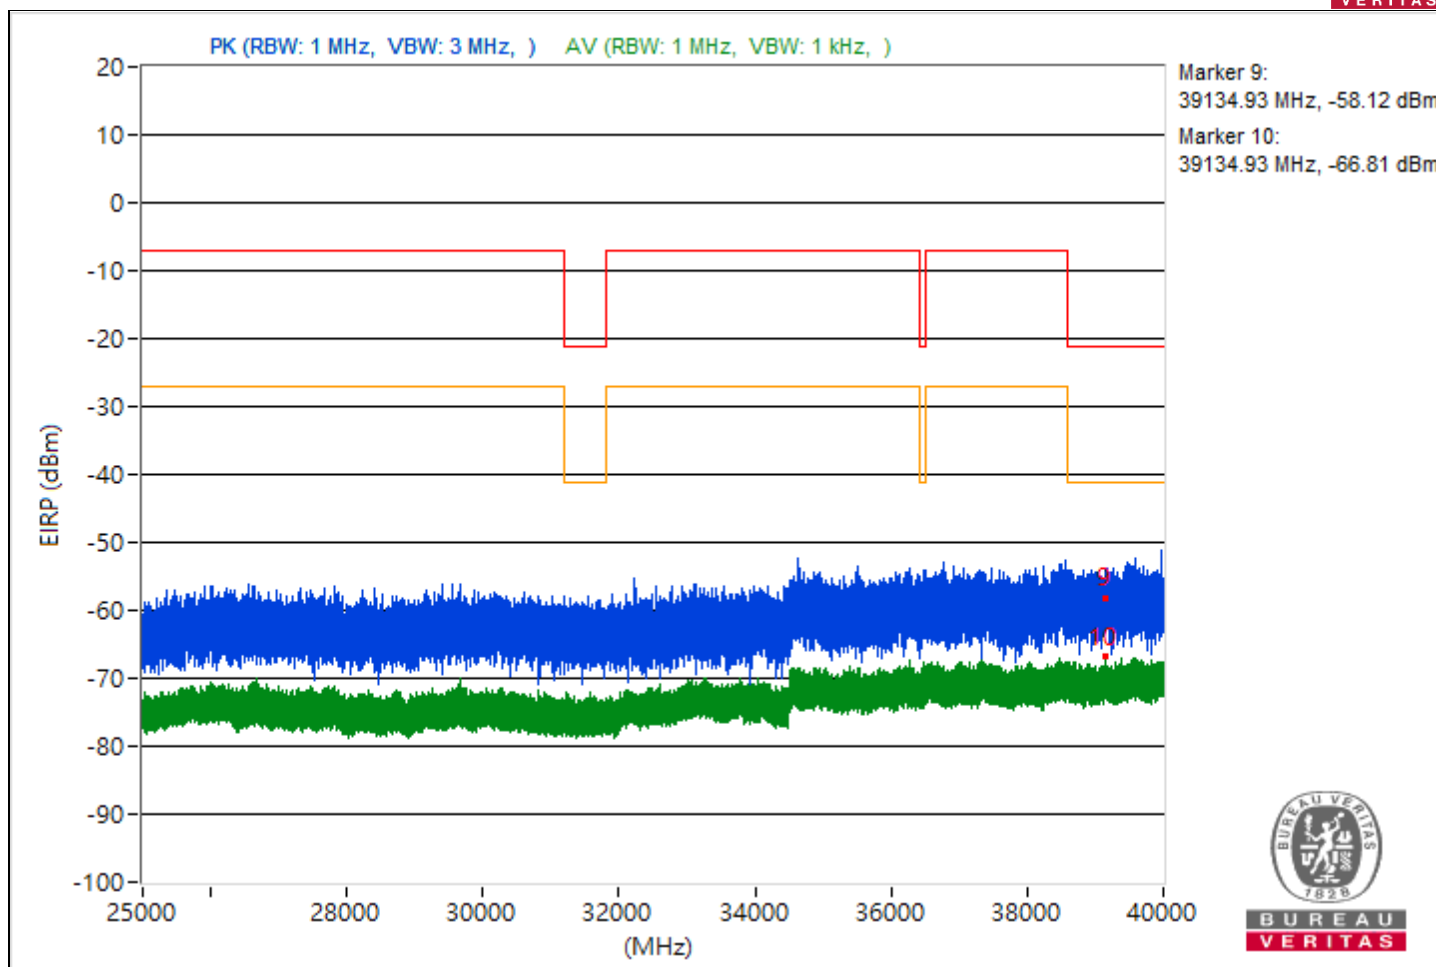


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5103.24	51.51 PK	74	-22.49	-48.91	5.16	-43.75
2	5103.24	30.6 AV	54	-23.4	-69.82	5.16	-64.66
3	9423.47	49.87 PK	74	-24.13	-50.55	5.16	-45.39
4	9423.47	29.81 AV	54	-24.19	-70.61	5.16	-65.45
5	19224.8	49.93 PK	74	-24.07	-50.49	5.16	-45.33
6	19224.8	32.3 AV	54	-21.7	-68.12	5.16	-62.96
7	23993.7	54.24 PK	74	-19.76	-46.18	5.16	-41.02
8	23993.7	33.08 AV	54	-20.92	-67.34	5.16	-62.18
9	39937.51	39.1 PK	74	-34.9	-61.32	5.16	-56.16
10	39937.51	29.04 AV	54	-24.96	-71.38	5.16	-66.22

Note: Margin value = Emission Level - Limit value

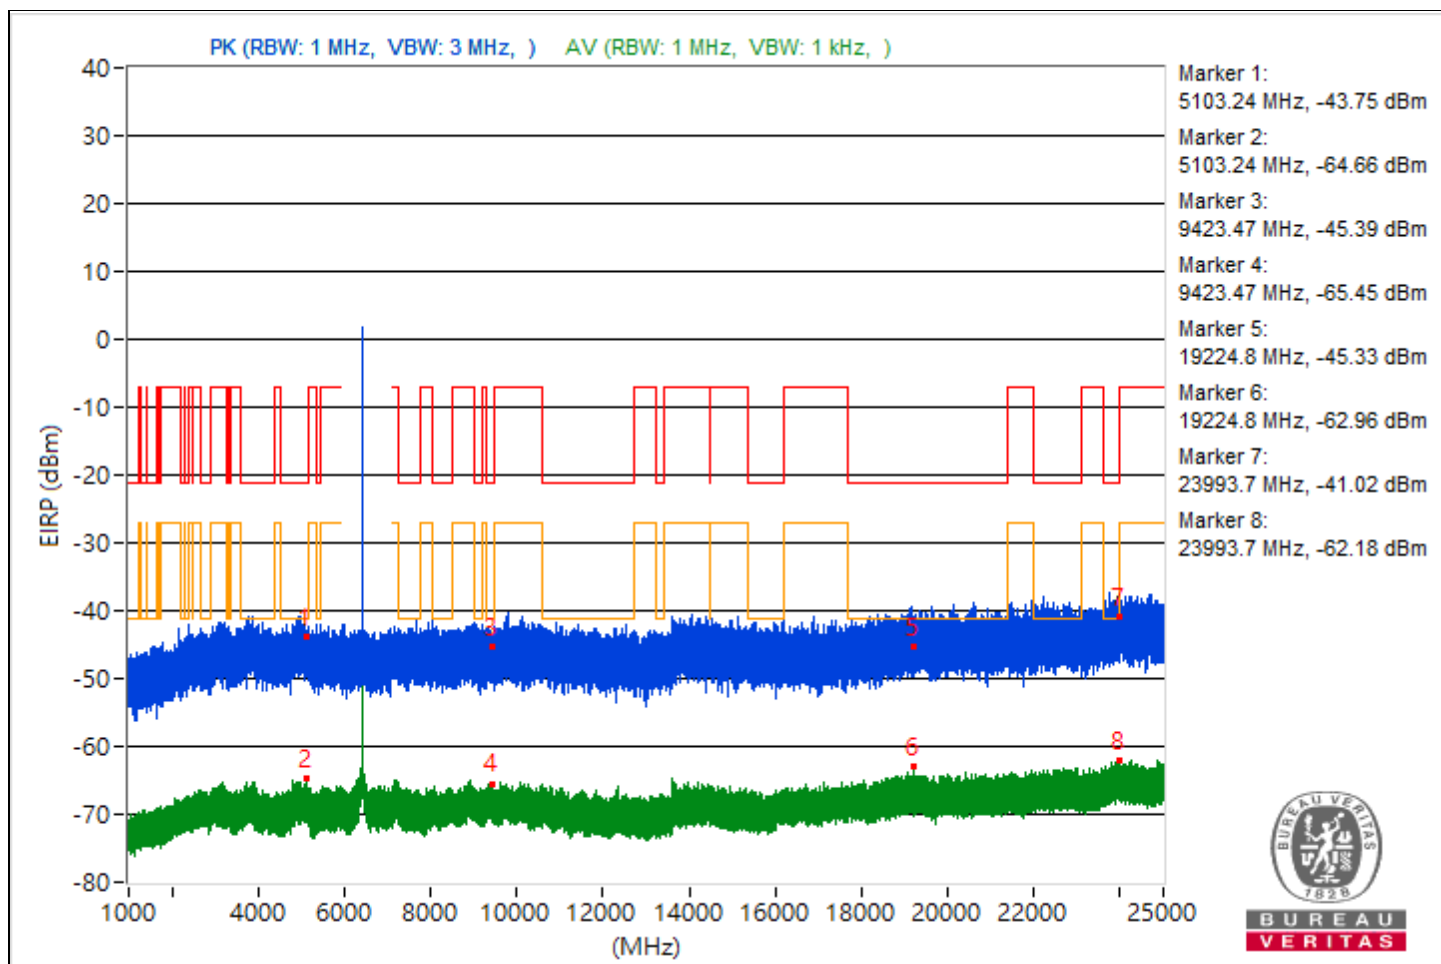


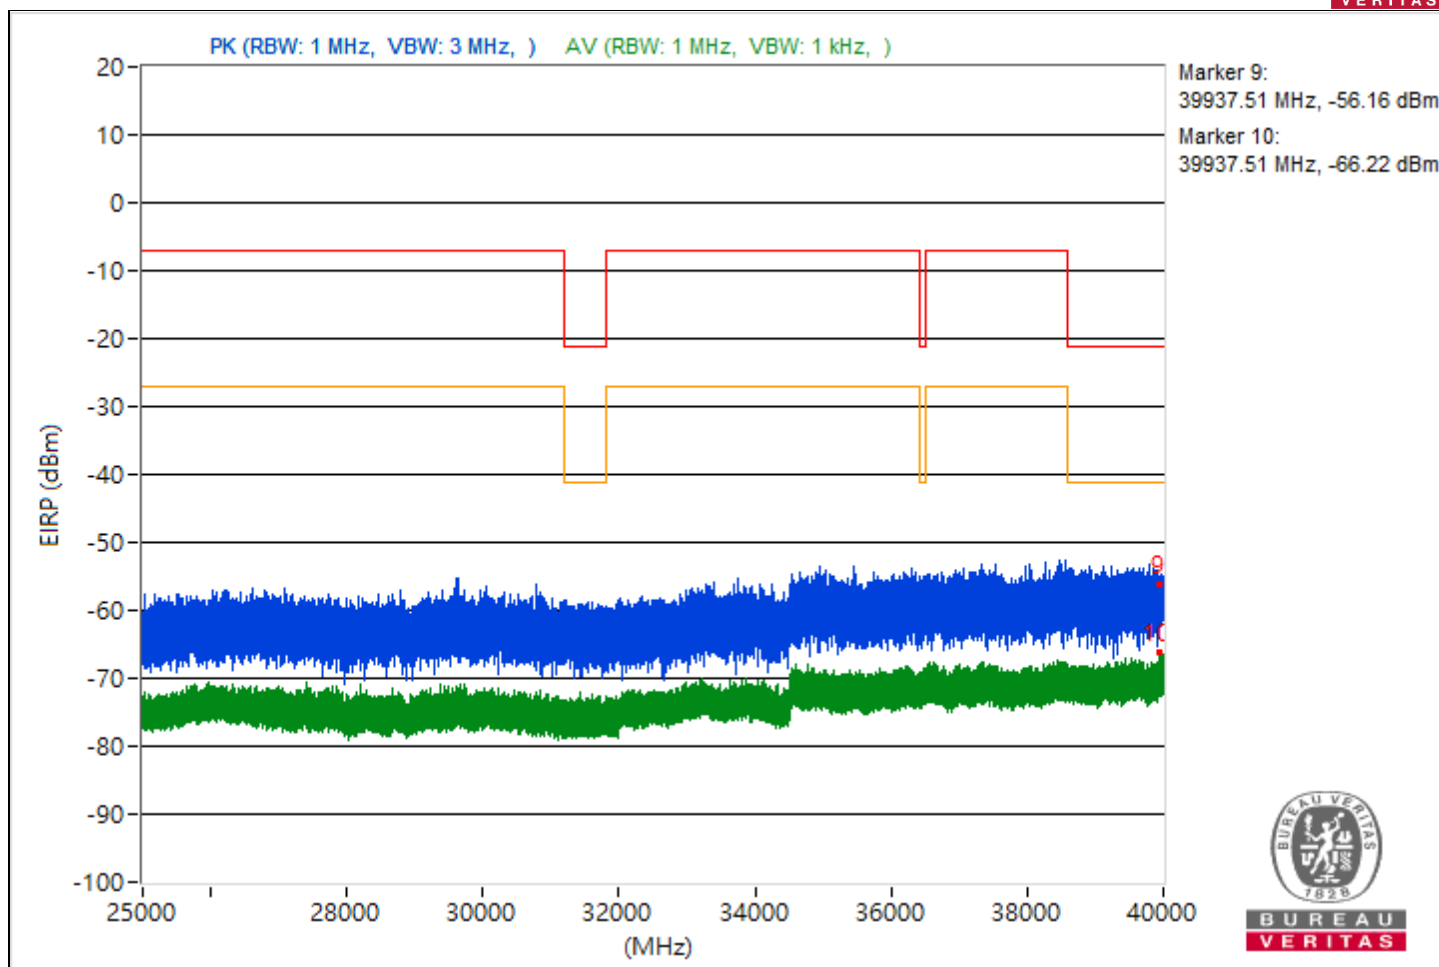


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5080.77	49.77 PK	74	-24.23	-50.65	5.16	-45.49
2	5080.77	30.44 AV	54	-23.56	-69.98	5.16	-64.82
3	10617.33	48.97 PK	74	-25.03	-51.45	5.16	-46.29
4	10617.33	29.72 AV	54	-24.28	-70.7	5.16	-65.54
5	20443.8	48.65 PK	74	-25.35	-51.77	5.16	-46.61
6	20443.8	31.88 AV	54	-22.12	-68.54	5.16	-63.38
7	23925.4	53.98 PK	74	-20.02	-46.44	5.16	-41.28
8	23925.4	33.09 AV	54	-20.91	-67.33	5.16	-62.17
9	39979.38	41.13 PK	74	-32.87	-59.29	5.16	-54.13
10	39979.38	28.62 AV	54	-25.38	-71.8	5.16	-66.64

Note: Margin value = Emission Level - Limit value

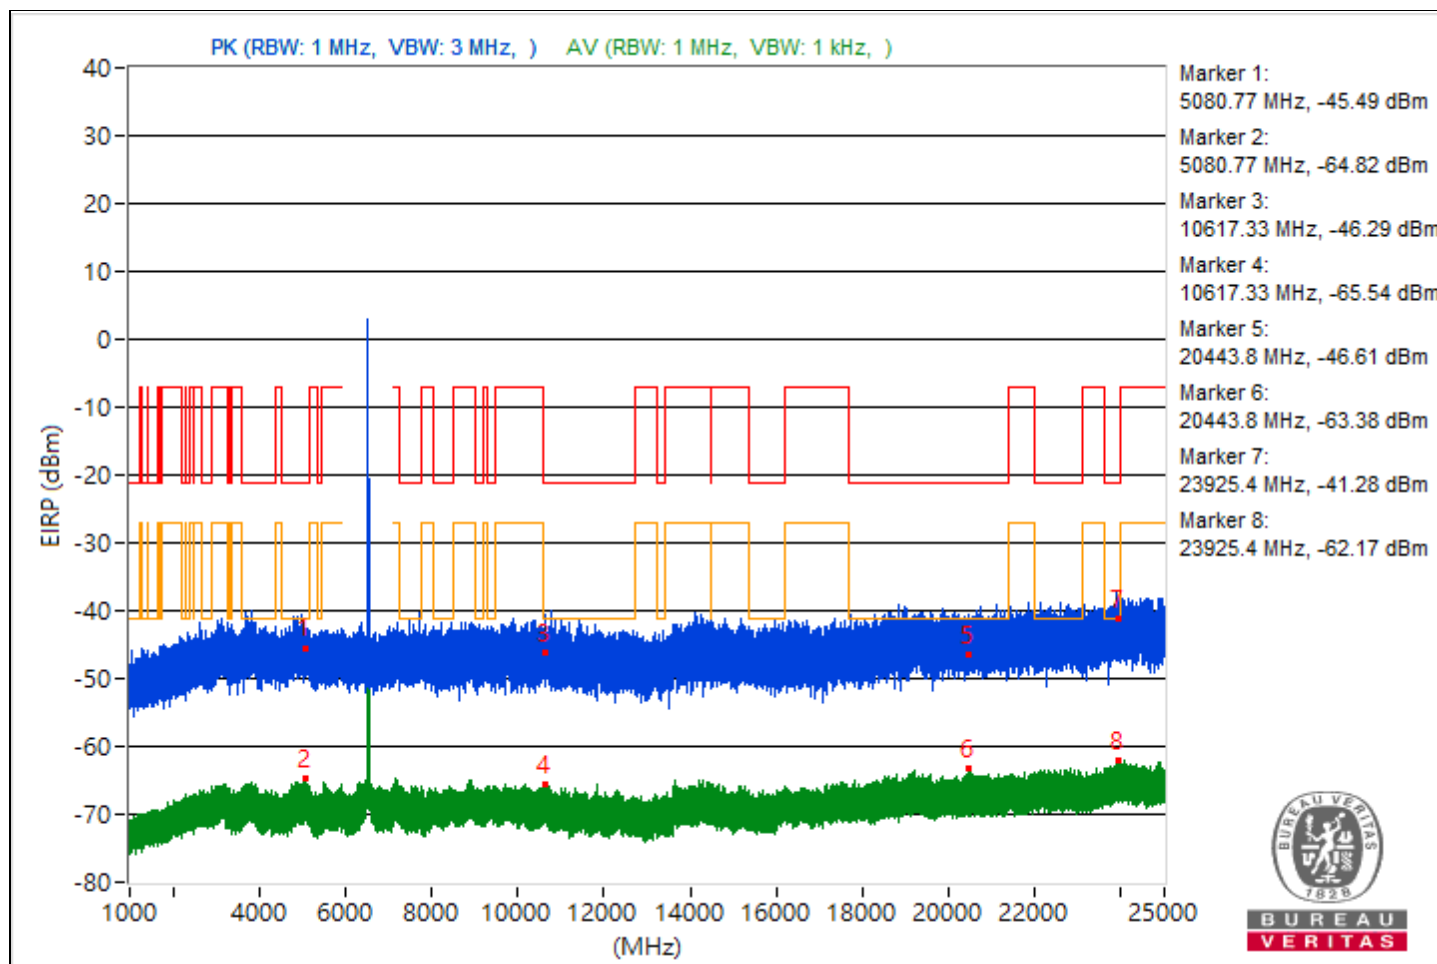


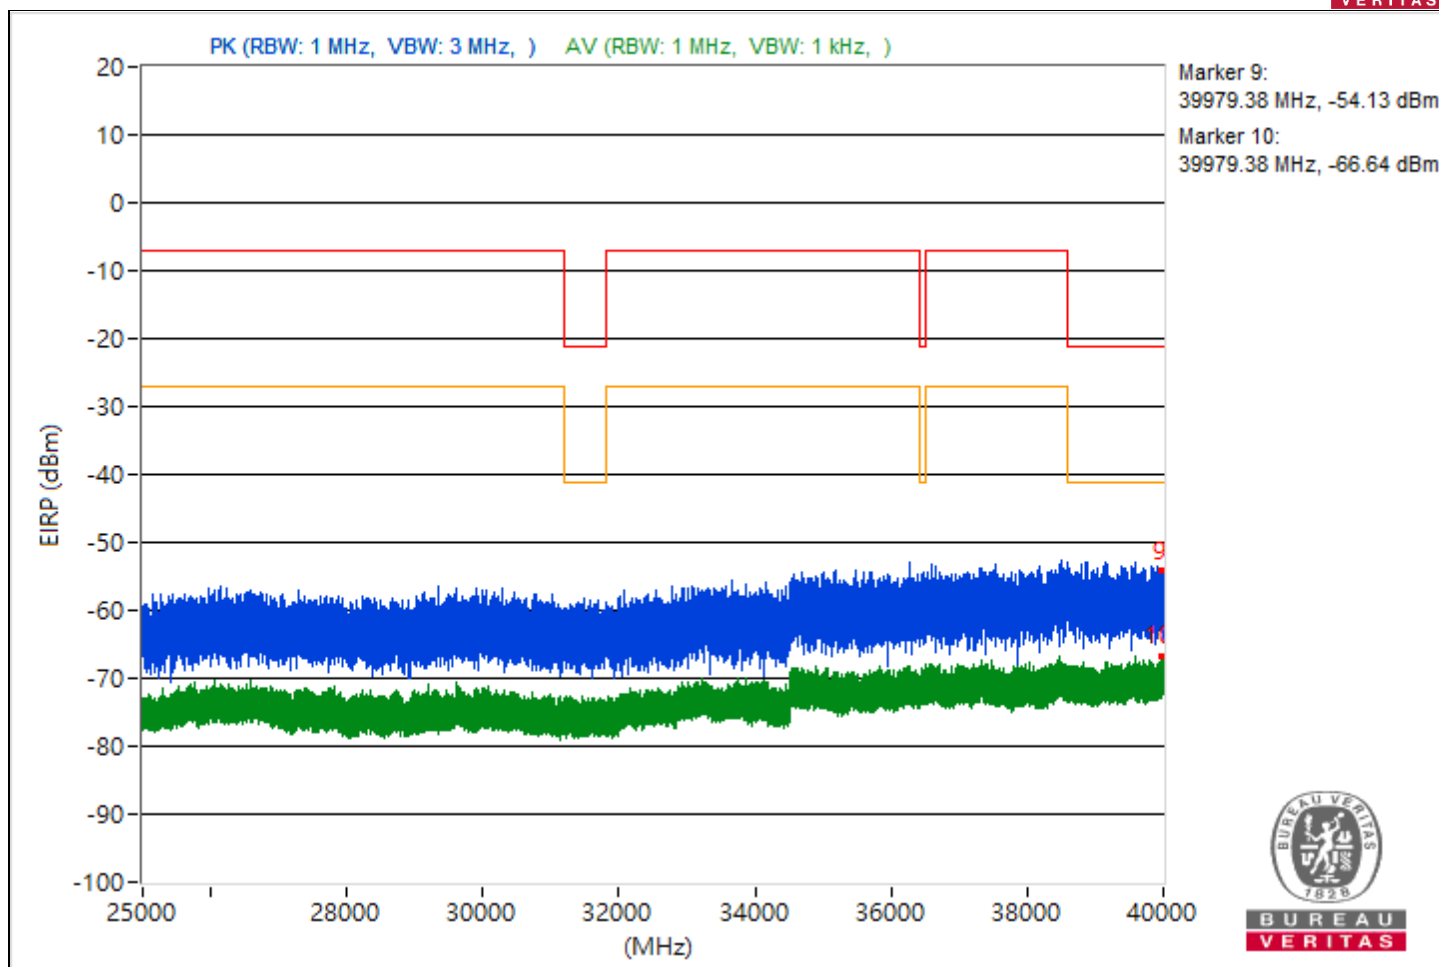


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5107.21	46.98 PK	74	-27.02	-53.44	5.16	-48.28
2	5107.21	30.41 AV	54	-23.59	-70.01	5.16	-64.85
3	9317.33	48.85 PK	74	-25.15	-51.57	5.16	-46.41
4	9317.33	29.8 AV	54	-24.2	-70.62	5.16	-65.46
5	20845	51.07 PK	74	-22.93	-49.35	5.16	-44.19
6	20845	31.72 AV	54	-22.28	-68.7	5.16	-63.54
7	23976.2	53.8 PK	74	-20.2	-46.62	5.16	-41.46
8	23976.2	33.45 AV	54	-20.55	-66.97	5.16	-61.81
9	39942.58	36.38 PK	74	-37.62	-64.04	5.16	-58.88
10	39942.58	28.31 AV	54	-25.69	-72.11	5.16	-66.95

Note: Margin value = Emission Level - Limit value

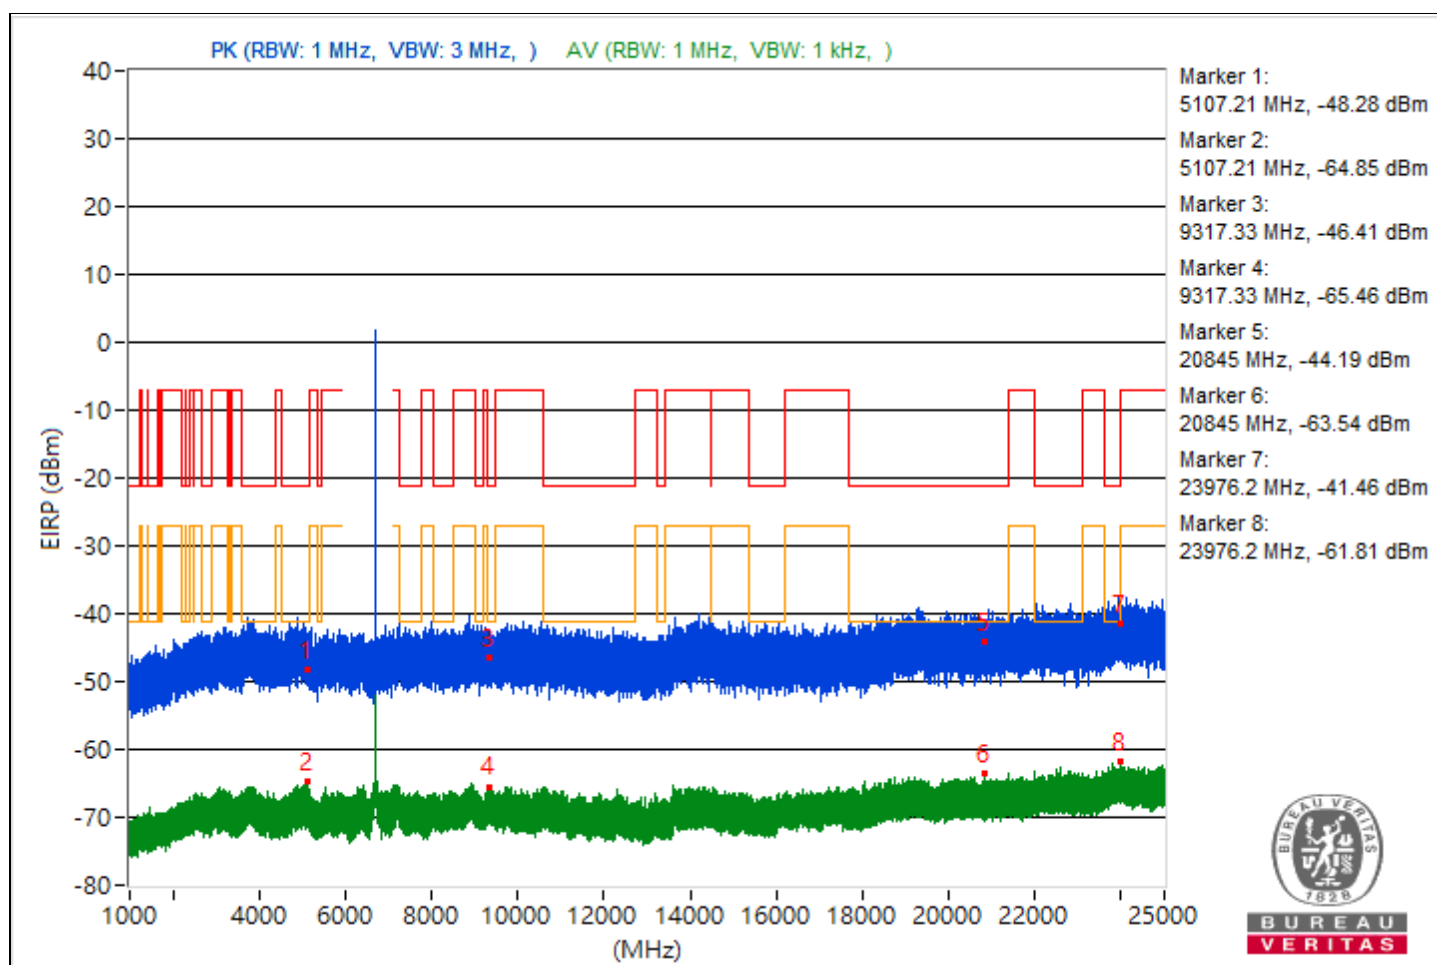


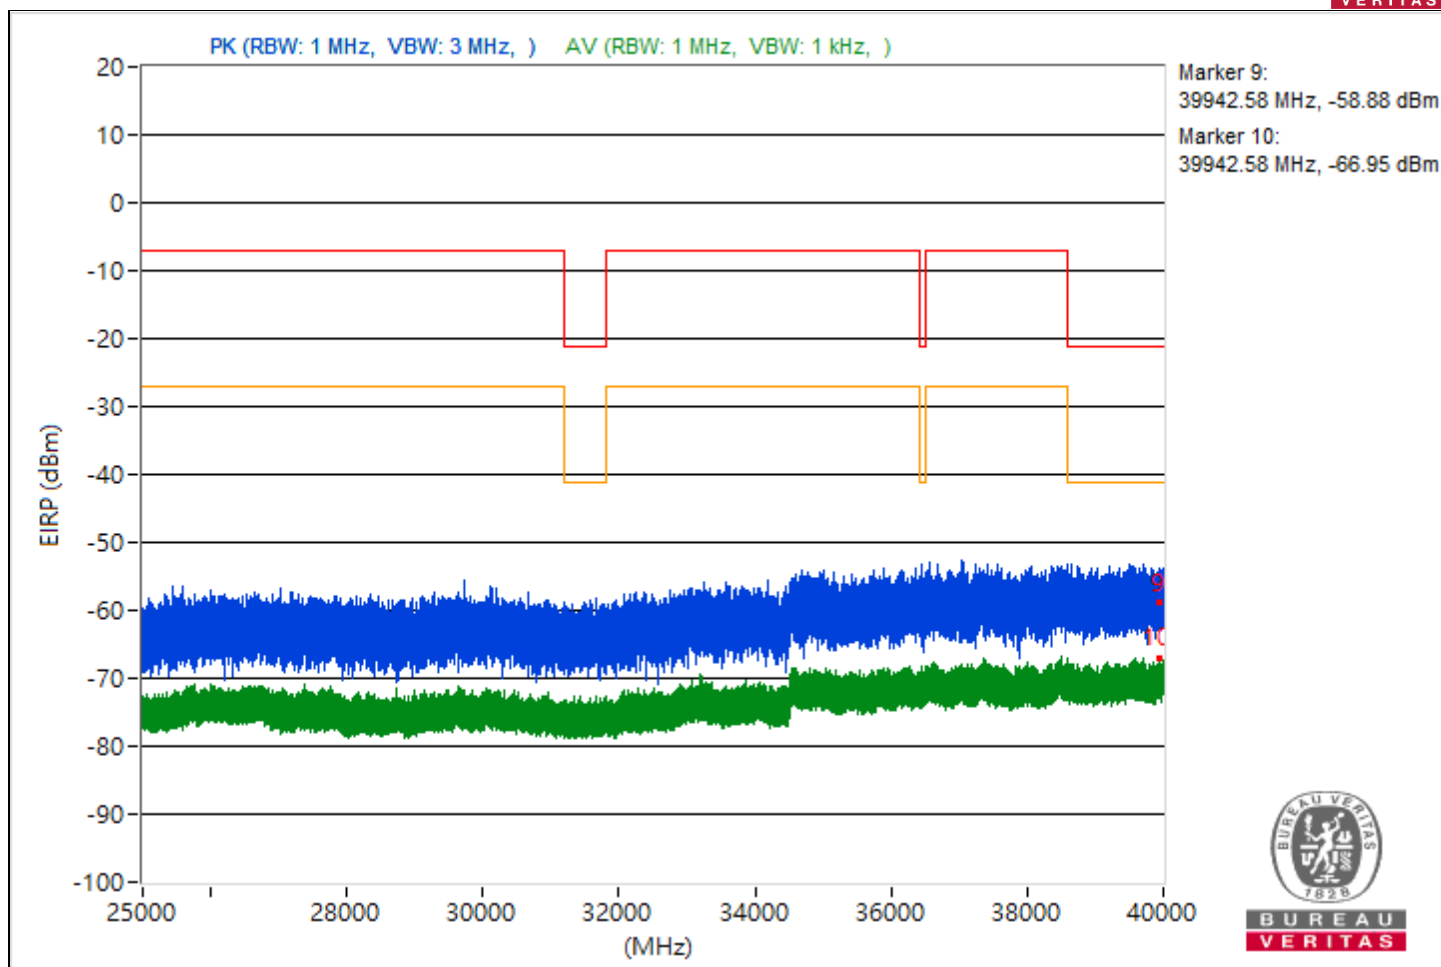


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3771.22	51.44 PK	74	-22.56	-48.98	5.16	-43.82
2	3771.22	30.19 AV	54	-23.81	-70.23	5.16	-65.07
3	10617.24	52.59 PK	74	-21.41	-47.83	5.16	-42.67
4	10617.24	30.27 AV	54	-23.73	-70.15	5.16	-64.99
5	21152.4	50.3 PK	74	-23.7	-50.12	5.16	-44.96
6	21152.4	31.65 AV	54	-22.35	-68.77	5.16	-63.61
7	23852.6	49.77 PK	74	-24.23	-50.65	5.16	-45.49
8	23852.6	32.98 AV	54	-21.02	-67.44	5.16	-62.28
9	39667.2	40.11 PK	74	-33.89	-60.31	5.16	-55.15
10	39667.2	28.52 AV	54	-25.48	-71.9	5.16	-66.74

Note: Margin value = Emission Level - Limit value

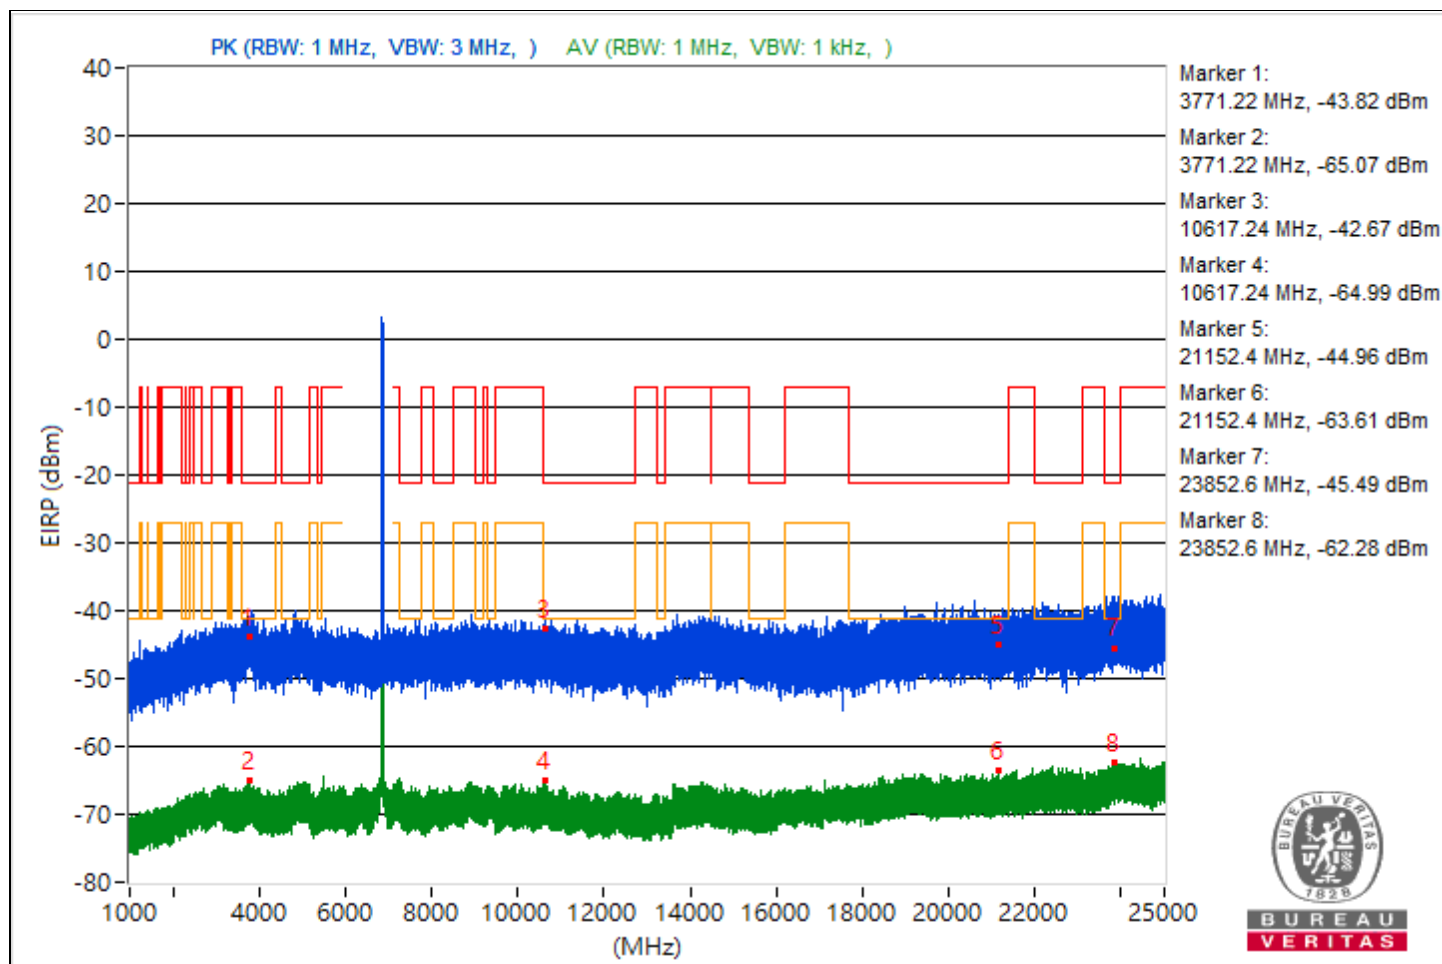

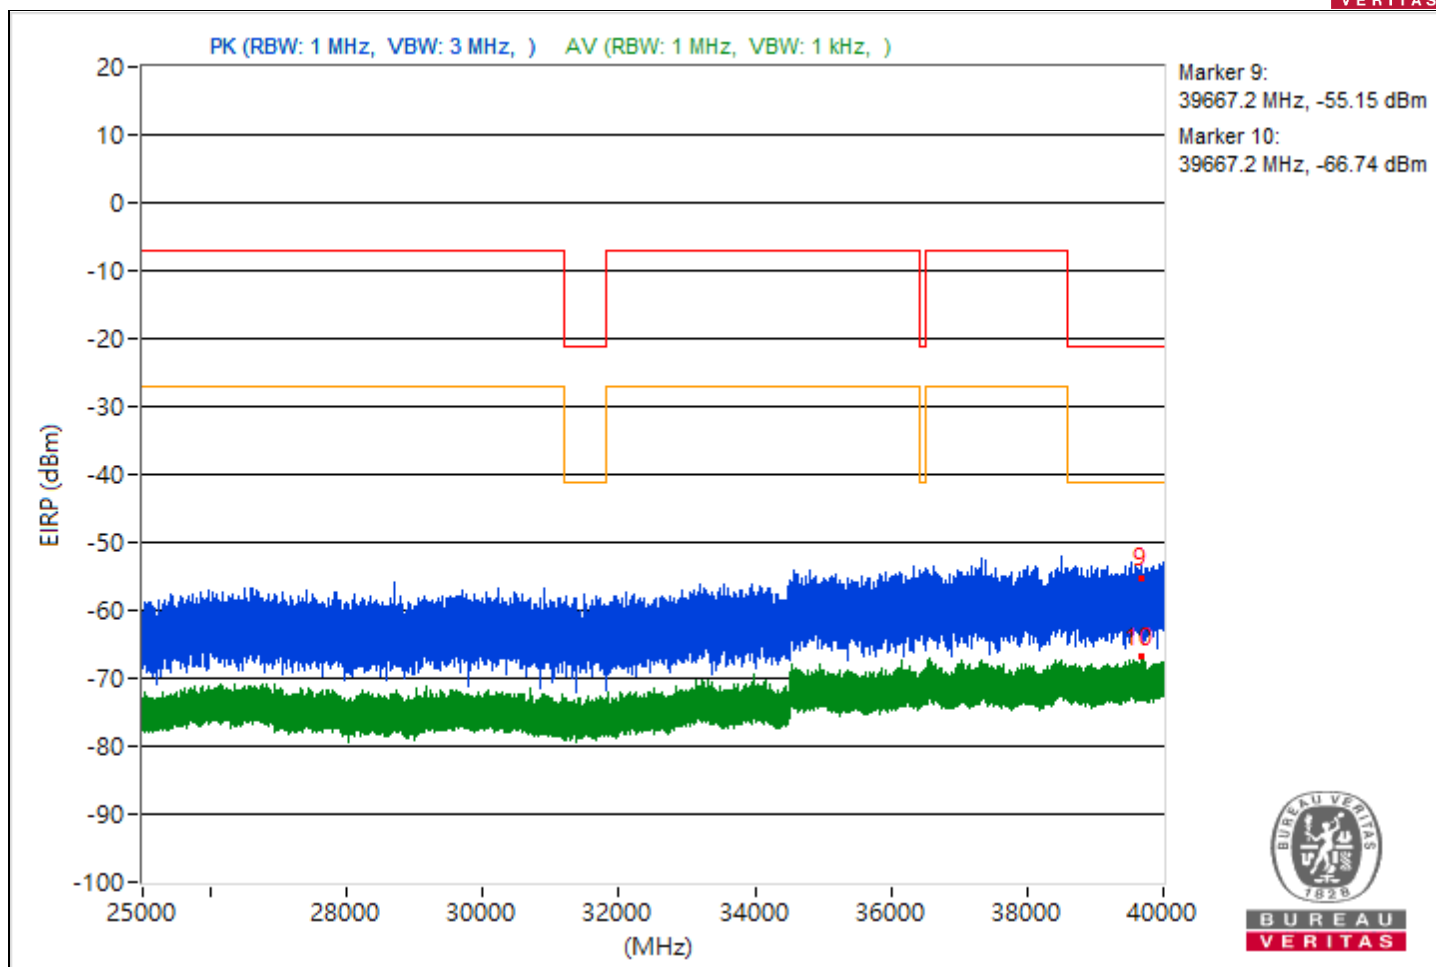



RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5452.47	48.36 PK	74	-25.64	-52.06	5.16	-46.9
2	5452.47	30.88 AV	54	-23.12	-69.54	5.16	-64.38
3	8437.69	50.17 PK	74	-23.83	-50.25	5.16	-45.09
4	8437.69	30.15 AV	54	-23.85	-70.27	5.16	-65.11
5	21157.9	49.17 PK	74	-24.83	-51.25	5.16	-46.09
6	21157.9	31.19 AV	54	-22.81	-69.23	5.16	-64.07
7	23991.1	51.75 PK	74	-22.25	-48.67	5.16	-43.51
8	23991.1	32.17 AV	54	-21.83	-68.25	5.16	-63.09
9	39619.29	38.74 PK	74	-35.26	-61.68	5.16	-56.52
10	39619.29	27.54 AV	54	-26.46	-72.88	5.16	-67.72

Note: Margin value = Emission Level - Limit value

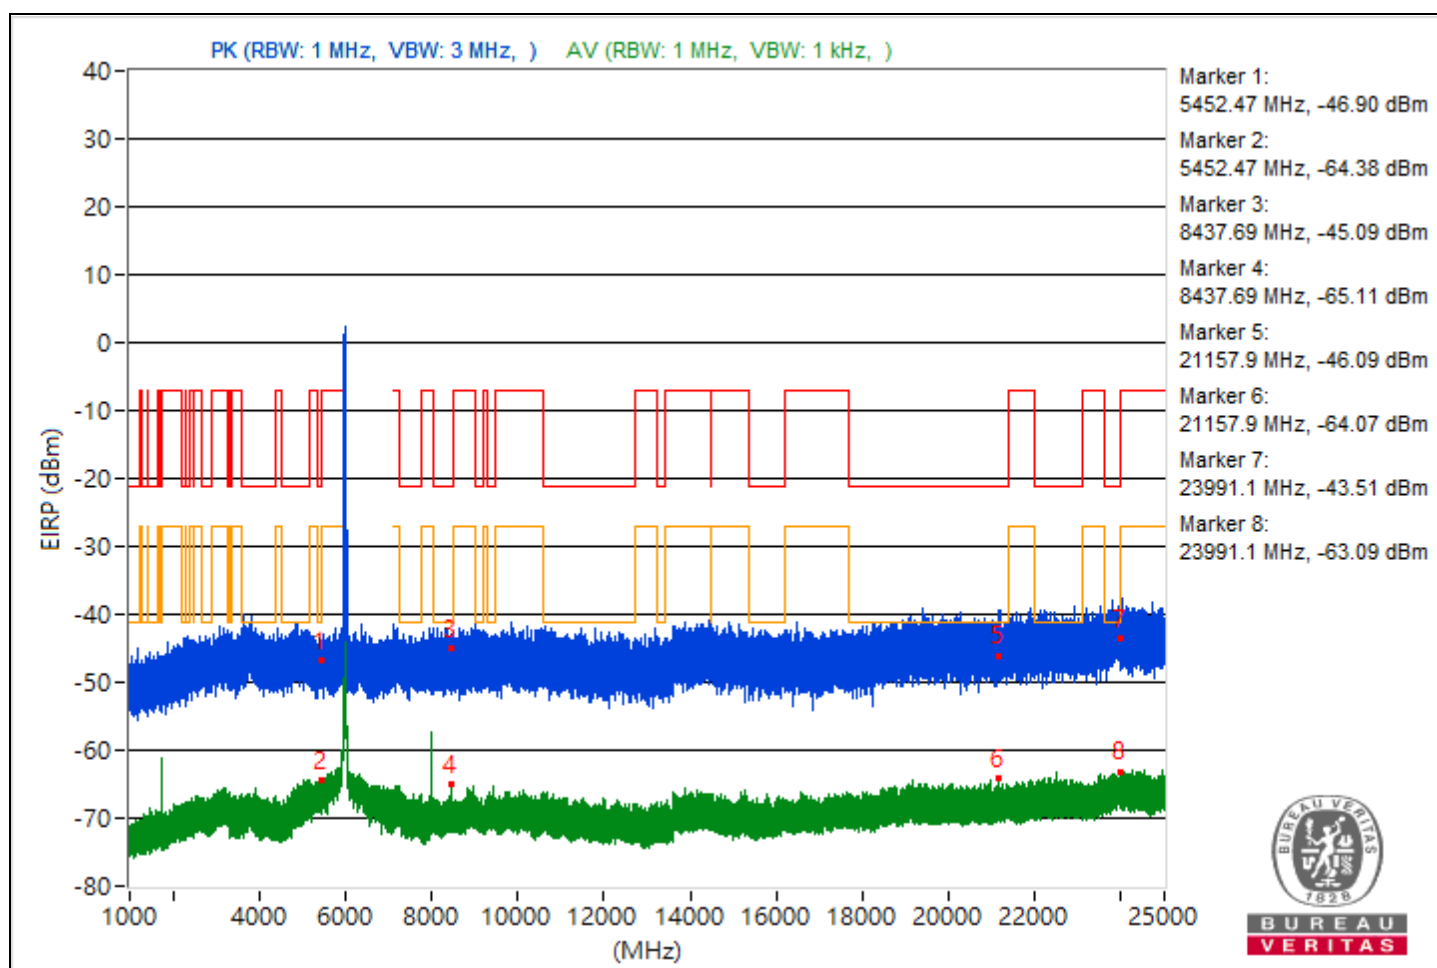


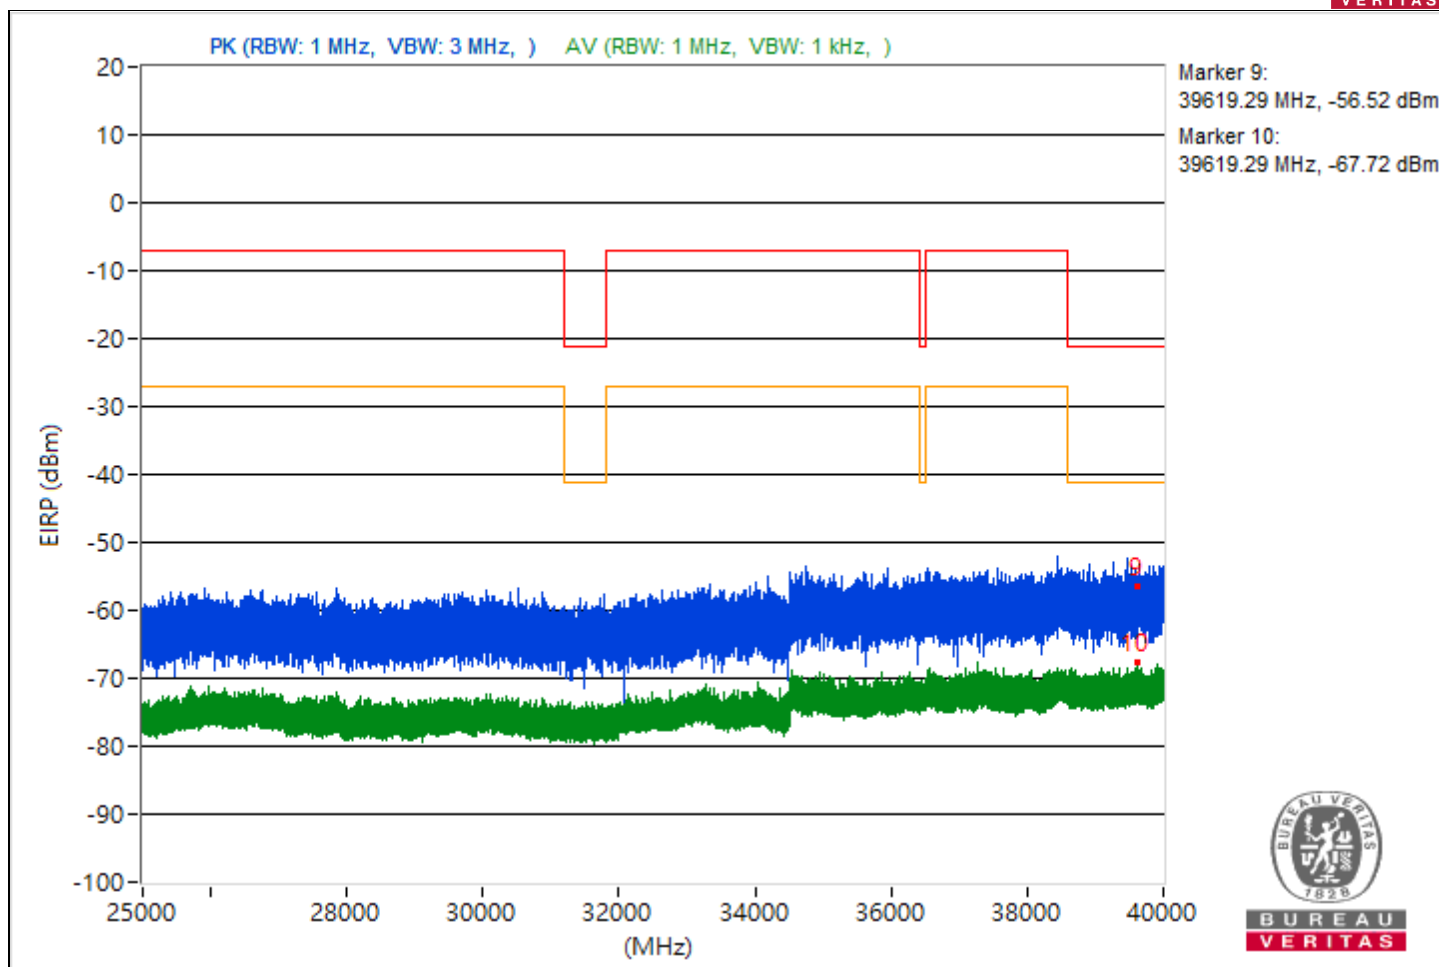


RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5041.57	50.49 PK	74	-23.51	-49.93	5.16	-44.77
2	5041.57	31.45 AV	54	-22.55	-68.97	5.16	-63.81
3	7252.71	47.48 PK	74	-26.52	-52.94	5.16	-47.78
4	7252.71	30.06 AV	54	-23.94	-70.36	5.16	-65.2
5	21130.4	49.05 PK	74	-24.95	-51.37	5.16	-46.21
6	21130.4	31.26 AV	54	-22.74	-69.16	5.16	-64
7	23972.6	51.05 PK	74	-22.95	-49.37	5.16	-44.21
8	23972.6	32.38 AV	54	-21.62	-68.04	5.16	-62.88
9	39580.62	38.11 PK	74	-35.89	-62.31	5.16	-57.15
10	39580.62	27.23 AV	54	-26.77	-73.19	5.16	-68.03

Note: Margin value = Emission Level - Limit value

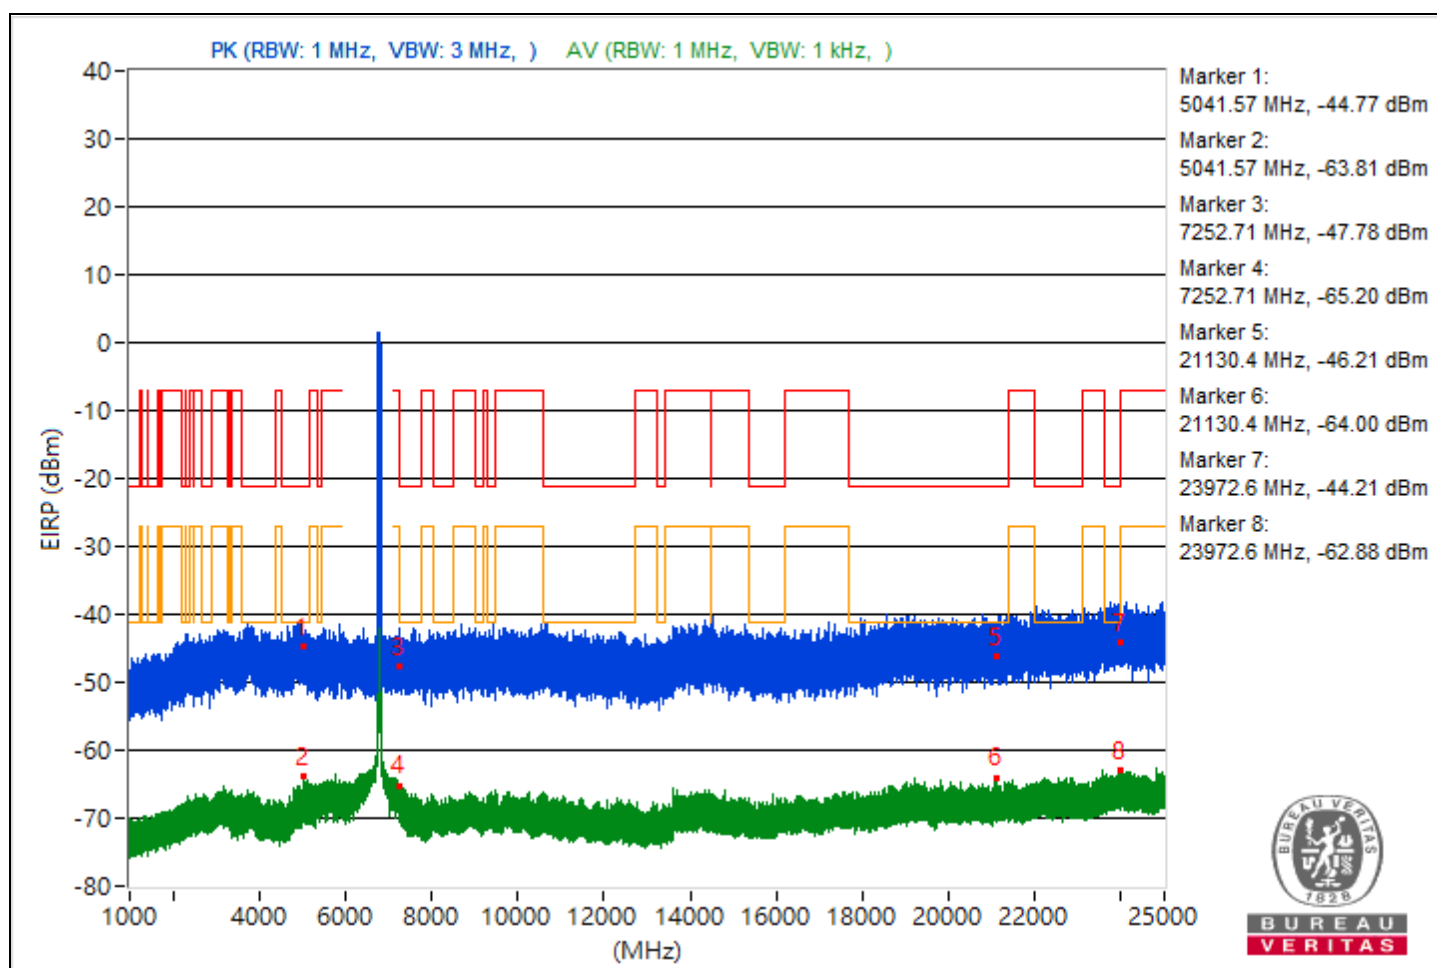


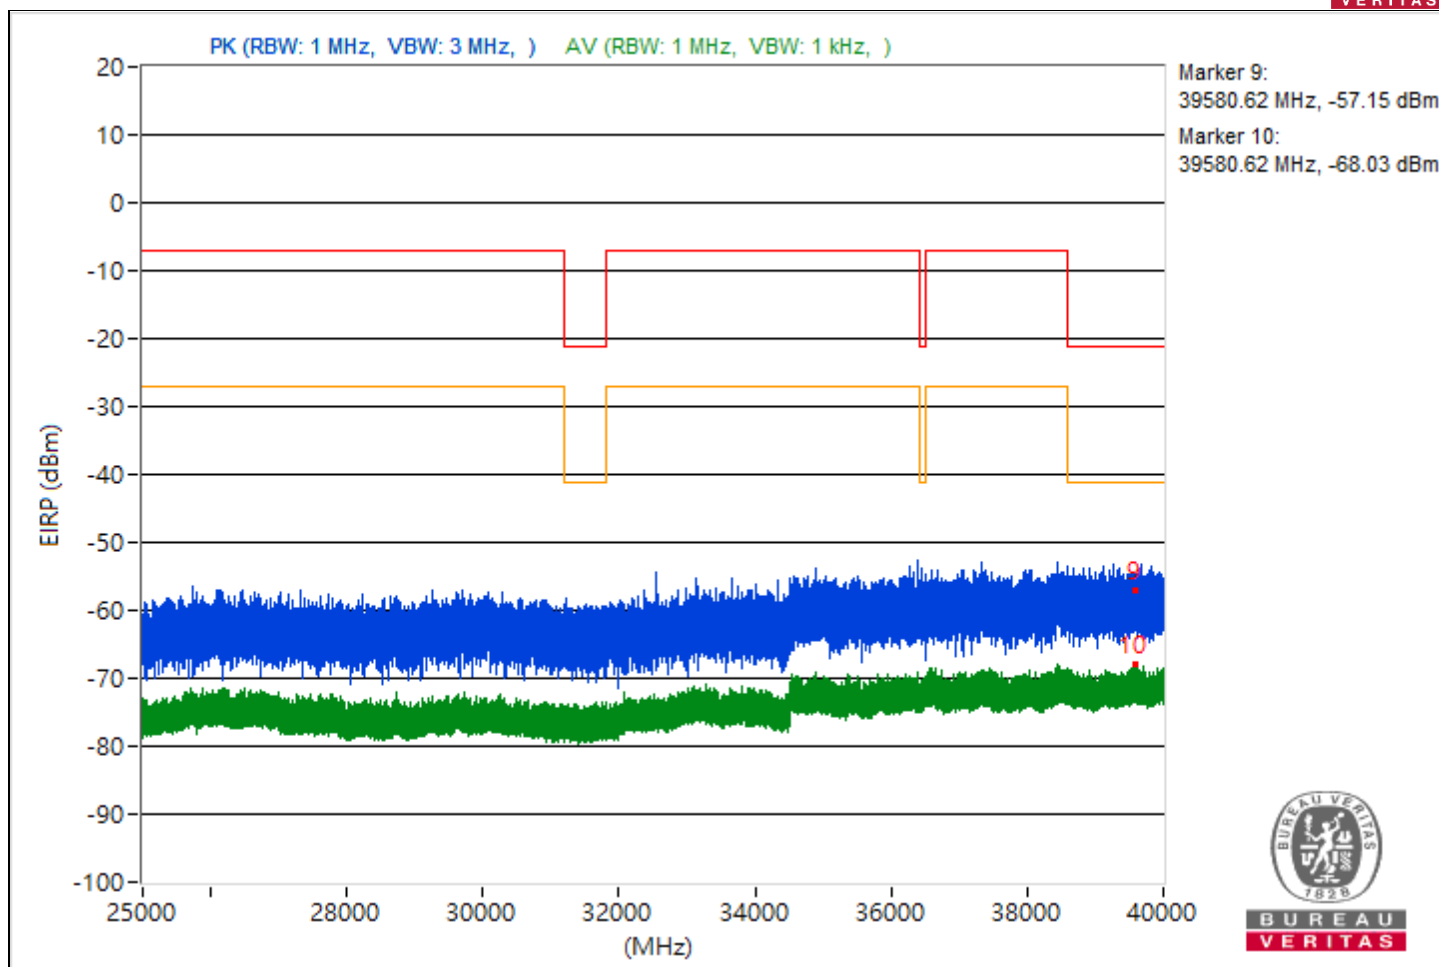


RF Mode	802.11be (EHT160) Punctured by 20 MHz	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5419.33	48.44 PK	74	-25.56	-51.98	5.16	-46.82
2	5419.33	31.76 AV	54	-22.24	-68.66	5.16	-63.5
3	8033.42	48.85 PK	74	-25.15	-51.57	5.16	-46.41
4	8033.42	36.26 AV	54	-17.74	-64.16	5.16	-59
5	19460.1	49.5 PK	74	-24.5	-50.92	5.16	-45.76
6	19460.1	30.67 AV	54	-23.33	-69.75	5.16	-64.59
7	23959	53.19 PK	74	-20.81	-47.23	5.16	-42.07
8	23959	32.67 AV	54	-21.33	-67.75	5.16	-62.59
9	39993.16	37.6 PK	74	-36.4	-62.82	5.16	-57.66
10	39993.16	27.36 AV	54	-26.64	-73.06	5.16	-67.9

Note: Margin value = Emission Level - Limit value

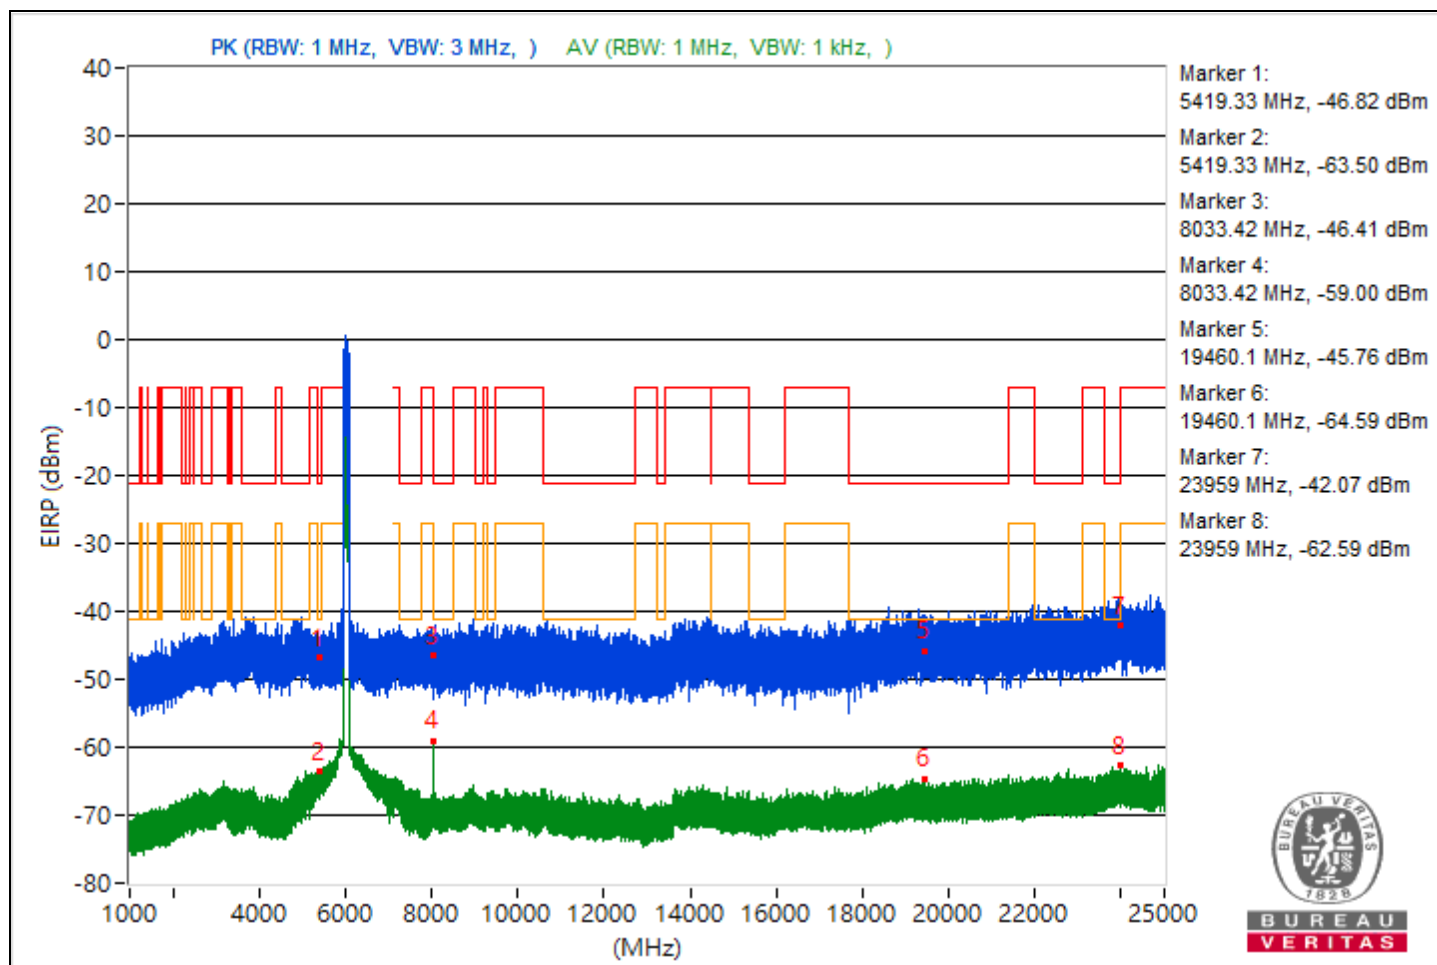


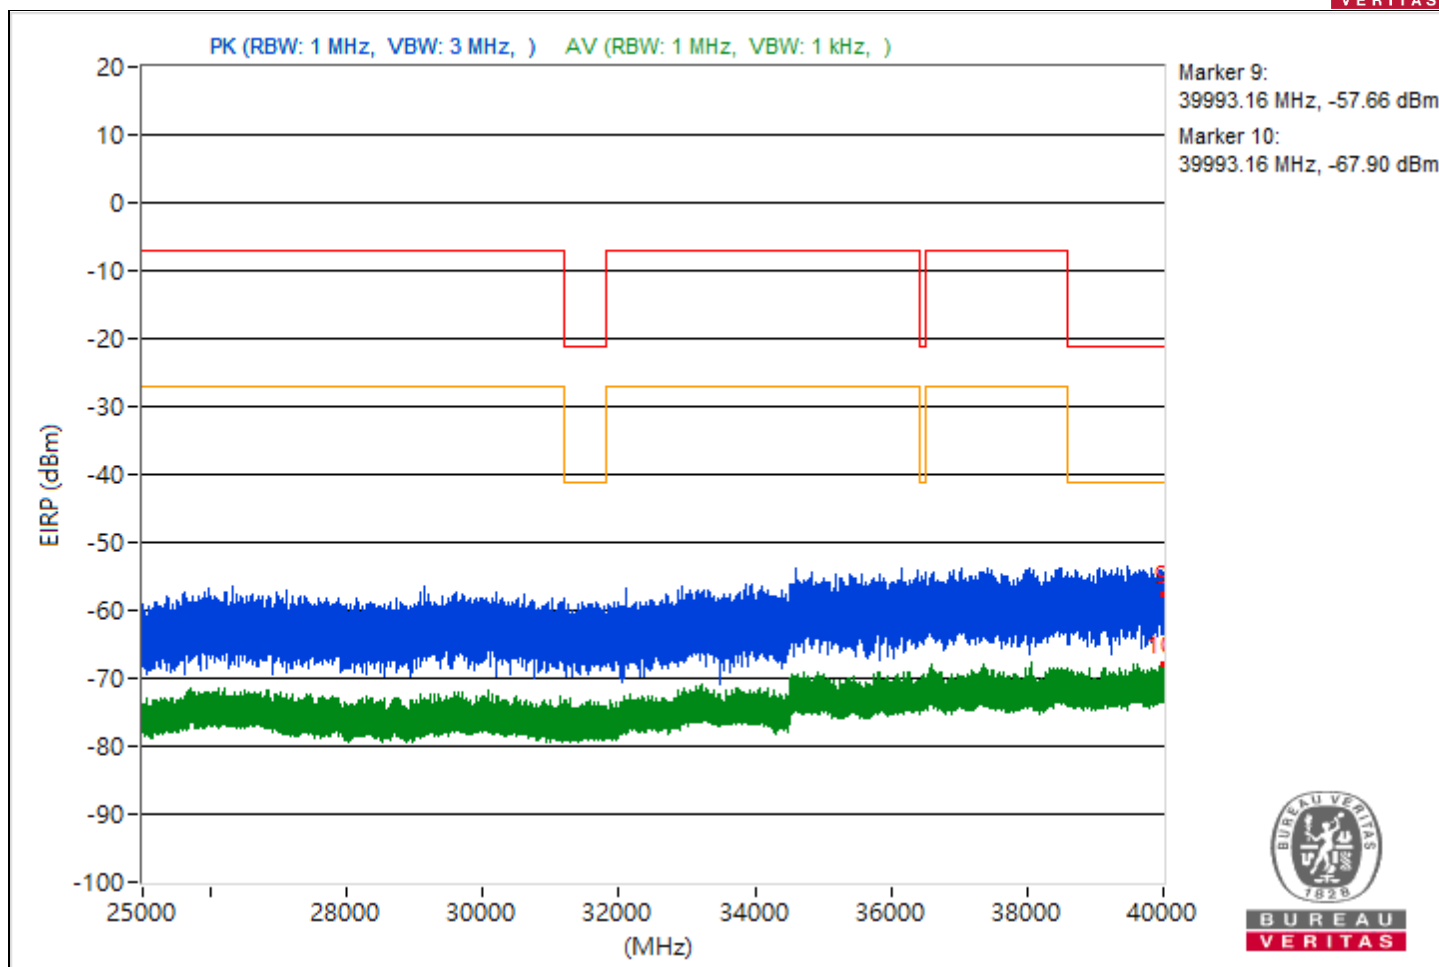


RF Mode	802.11be (EHT160) Punctured by 20 MHz	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5110.24	48.04 PK	74	-25.96	-52.38	5.16	-47.22
2	5110.24	31.1 AV	54	-22.9	-69.32	5.16	-64.16
3	7250.14	43.7 PK	74	-30.3	-56.72	5.16	-51.56
4	7250.14	30.47 AV	54	-23.53	-69.95	5.16	-64.79
5	20038.9	49.27 PK	74	-24.73	-51.15	5.16	-45.99
6	20038.9	31.05 AV	54	-22.95	-69.37	5.16	-64.21
7	23850.7	51.98 PK	74	-22.02	-48.44	5.16	-43.28
8	23850.7	32.42 AV	54	-21.58	-68	5.16	-62.84
9	39654.84	31.09 PK	74	-42.91	-69.33	5.16	-64.17
10	39654.84	27.59 AV	54	-26.41	-72.83	5.16	-67.67

Note: Margin value = Emission Level - Limit value

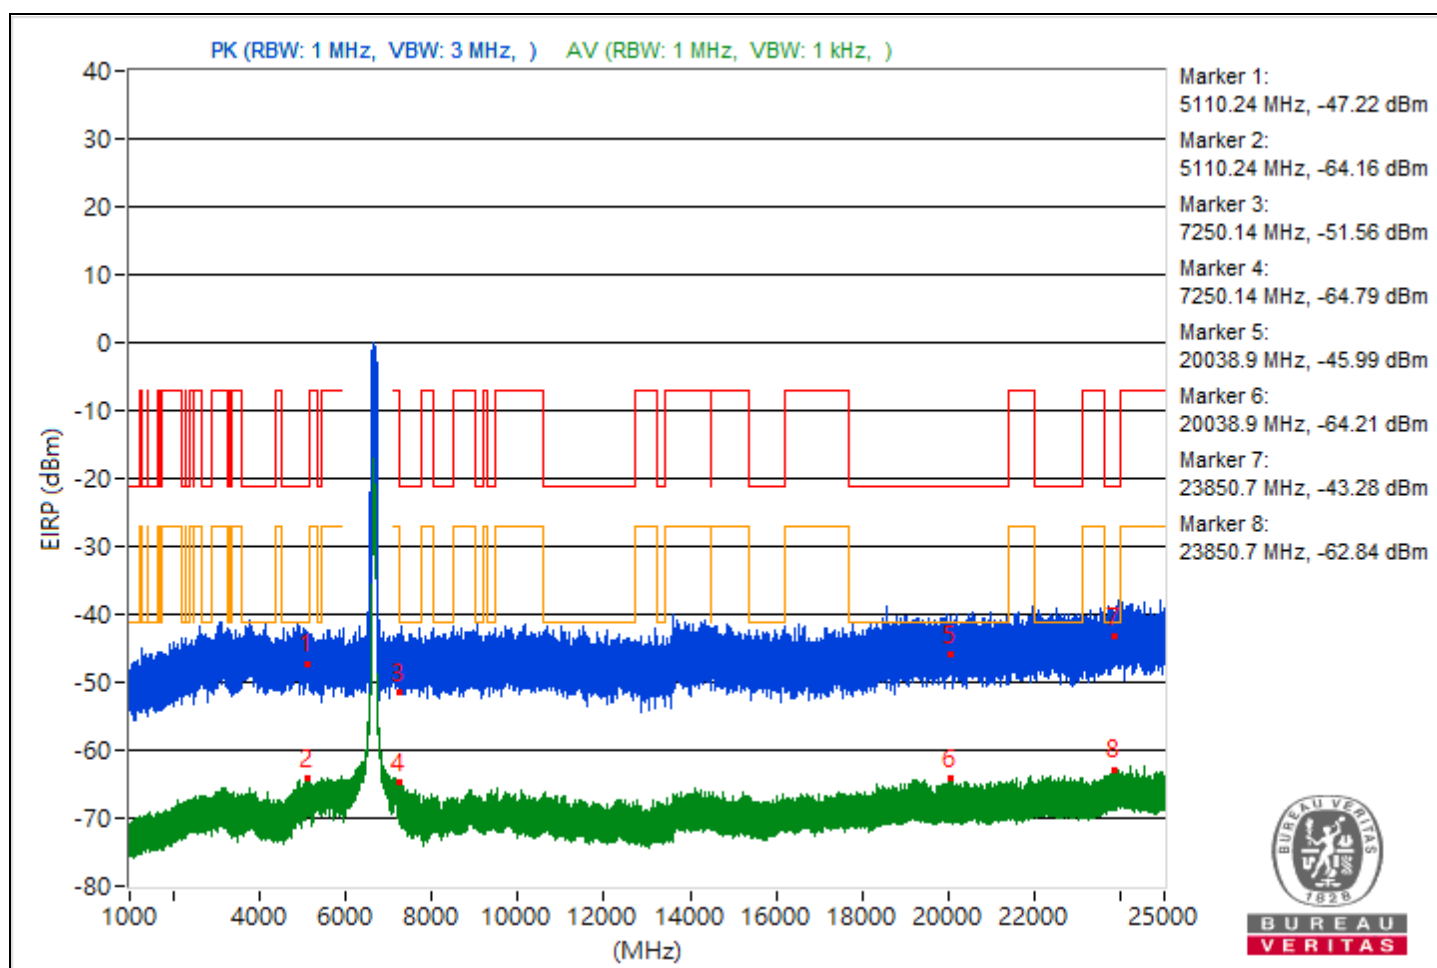


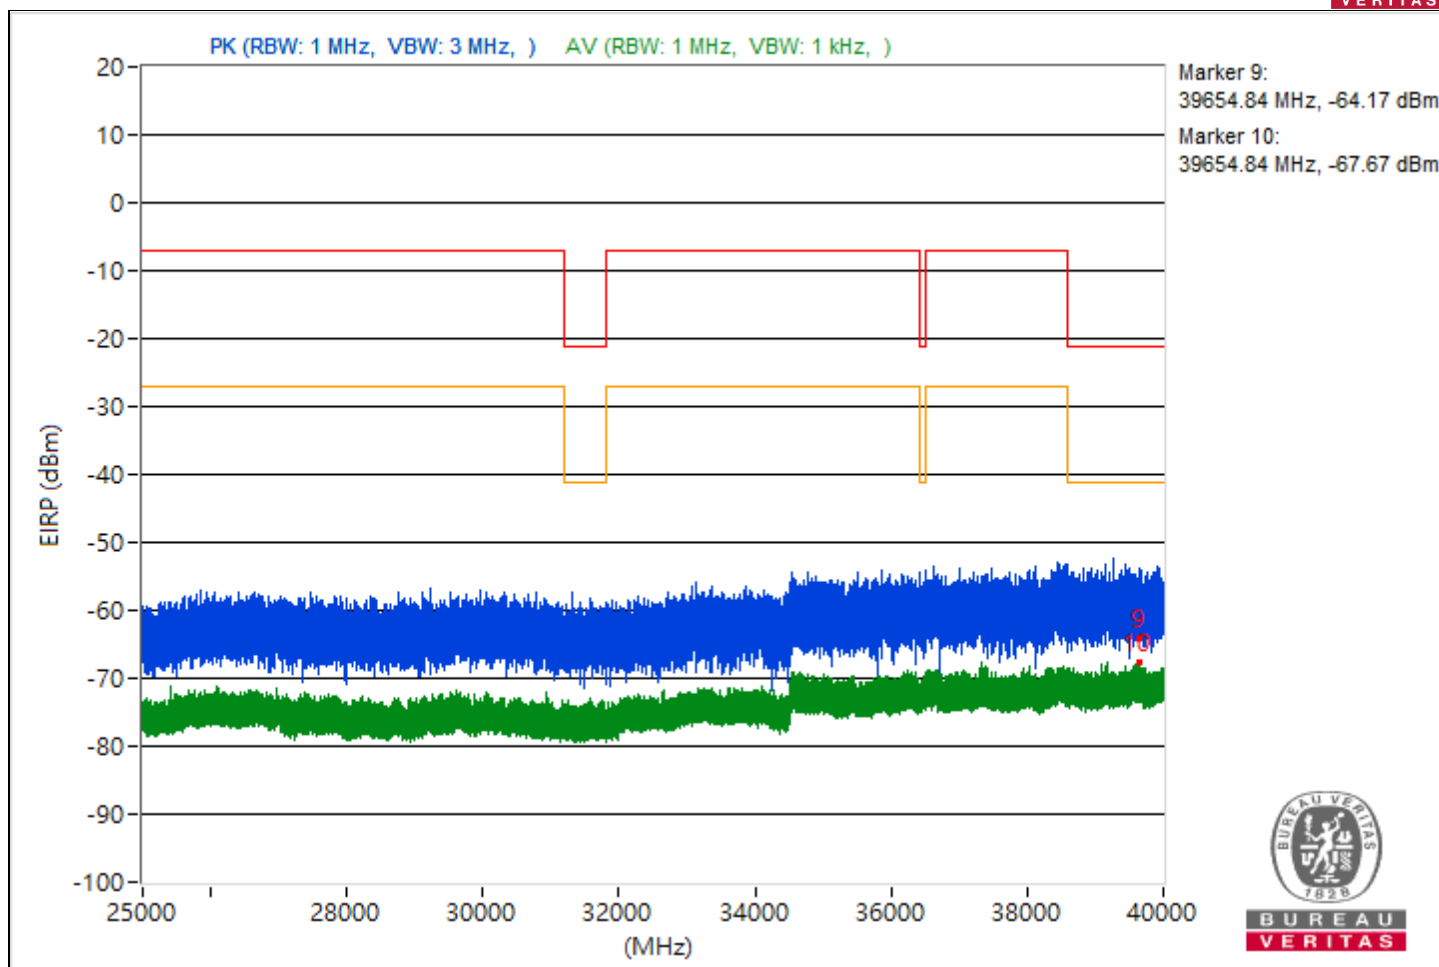


RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5439.87	49.42 PK	74	-24.58	-51	5.16	-45.84
2	5439.87	31.95 AV	54	-22.05	-68.47	5.16	-63.31
3	8033.42	48.76 PK	74	-25.24	-51.66	5.16	-46.5
4	8033.42	36.21 AV	54	-17.79	-64.21	5.16	-59.05
5	21265.1	51.73 PK	74	-22.27	-48.69	5.16	-43.53
6	21265.1	31.29 AV	54	-22.71	-69.13	5.16	-63.97
7	23887.5	53.46 PK	74	-20.54	-46.96	5.16	-41.8
8	23887.5	32.59 AV	54	-21.41	-67.83	5.16	-62.67
9	39691.47	35.07 PK	74	-38.93	-65.35	5.16	-60.19
10	39691.47	28.06 AV	54	-25.94	-72.36	5.16	-67.2

Note: Margin value = Emission Level - Limit value

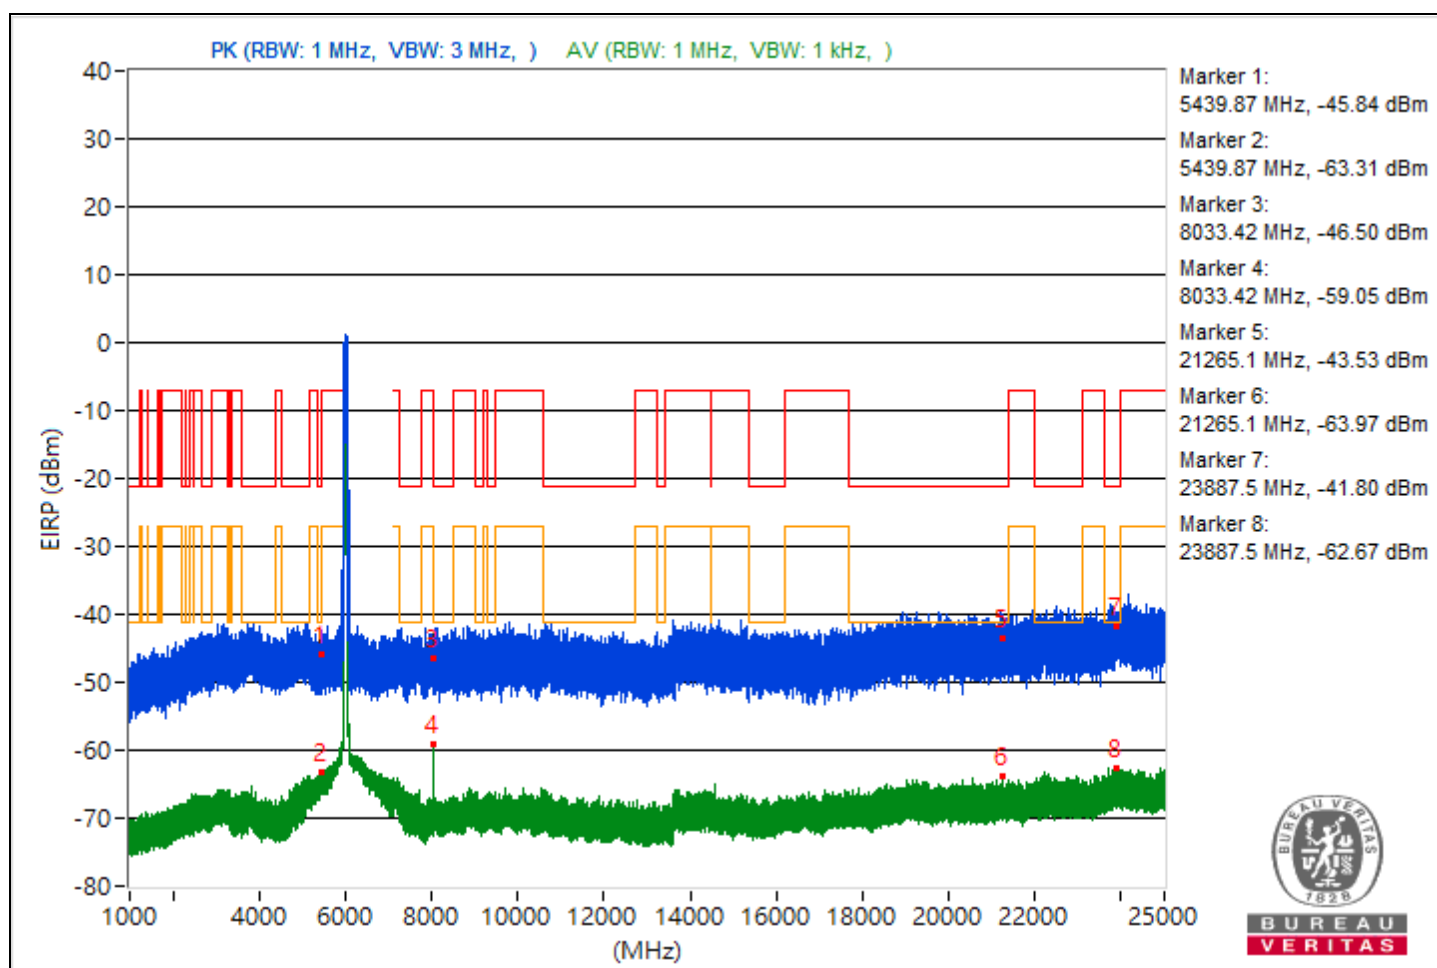

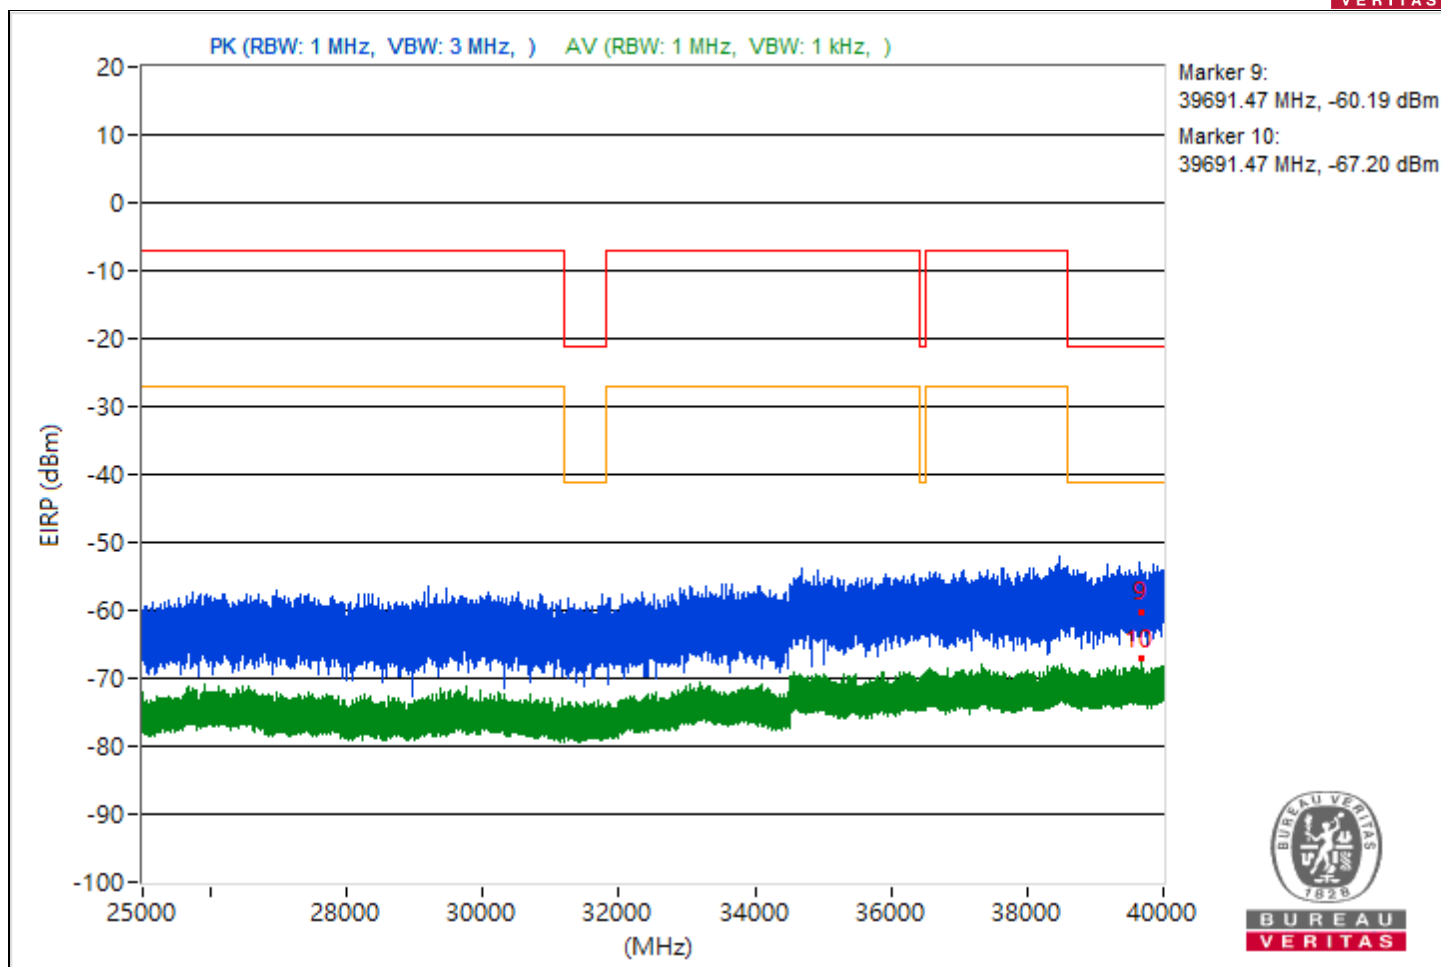



RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5113.74	45.25 PK	74	-28.75	-55.17	5.16	-50.01
2	5113.74	31.39 AV	54	-22.61	-69.03	5.16	-63.87
3	7261.11	47.14 PK	74	-26.86	-53.28	5.16	-48.12
4	7261.11	30.72 AV	54	-23.28	-69.7	5.16	-64.54
5	19099.2	53.43 PK	74	-20.57	-46.99	5.16	-41.83
6	19099.2	31.34 AV	54	-22.66	-69.08	5.16	-63.92
7	23888.4	48.95 PK	74	-25.05	-51.47	5.16	-46.31
8	23888.4	32.48 AV	54	-21.52	-67.94	5.16	-62.78
9	39976.89	37.48 PK	74	-36.52	-62.94	5.16	-57.78
10	39976.89	27.51 AV	54	-26.49	-72.91	5.16	-67.75

Note: Margin value = Emission Level - Limit value

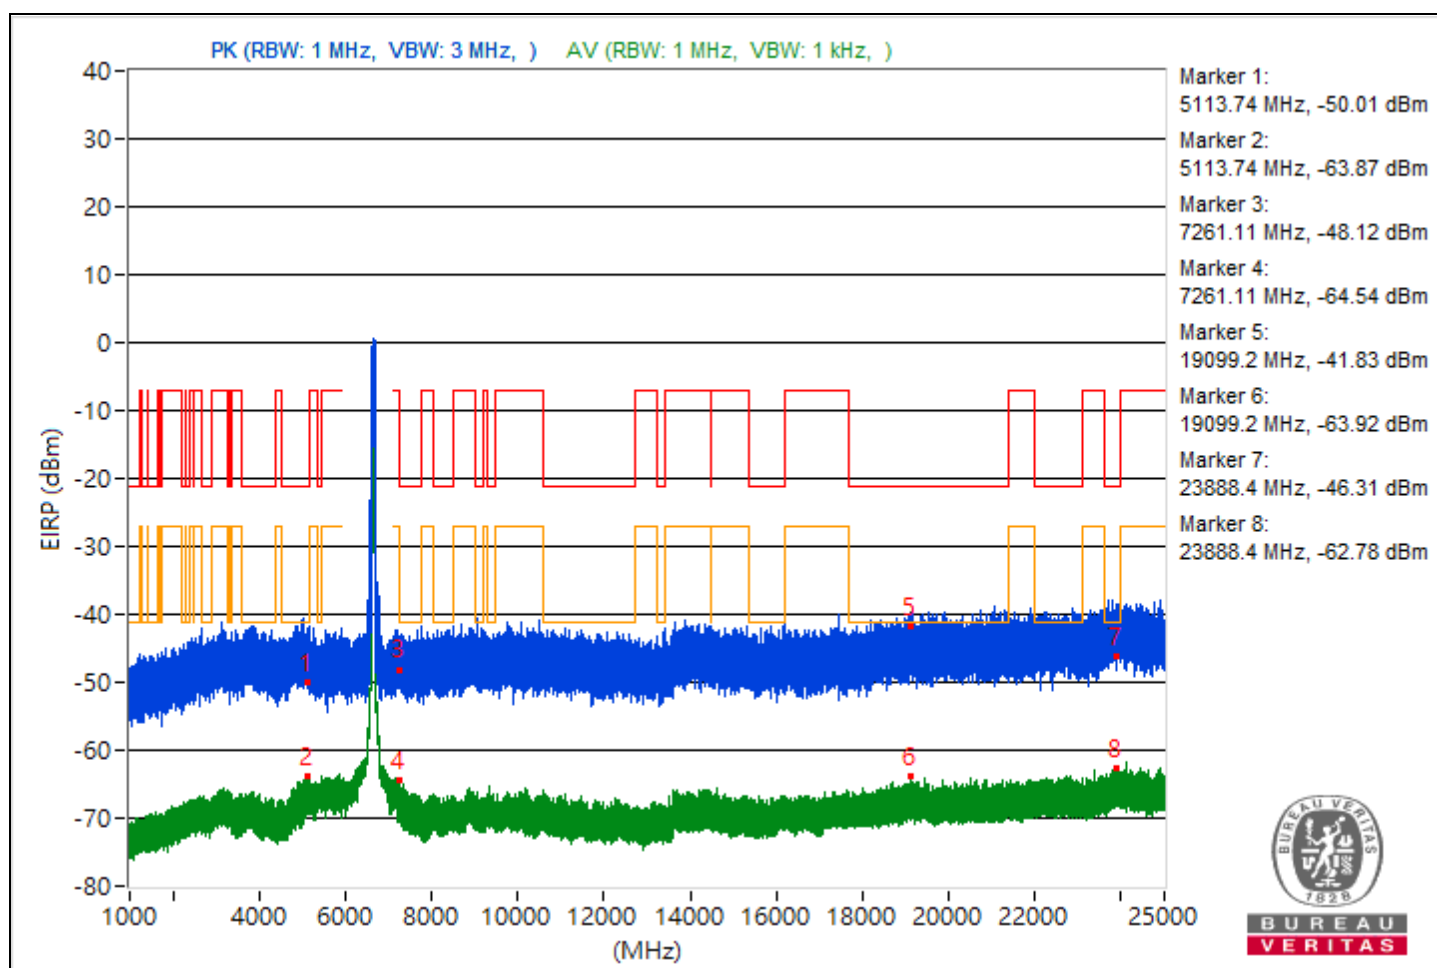

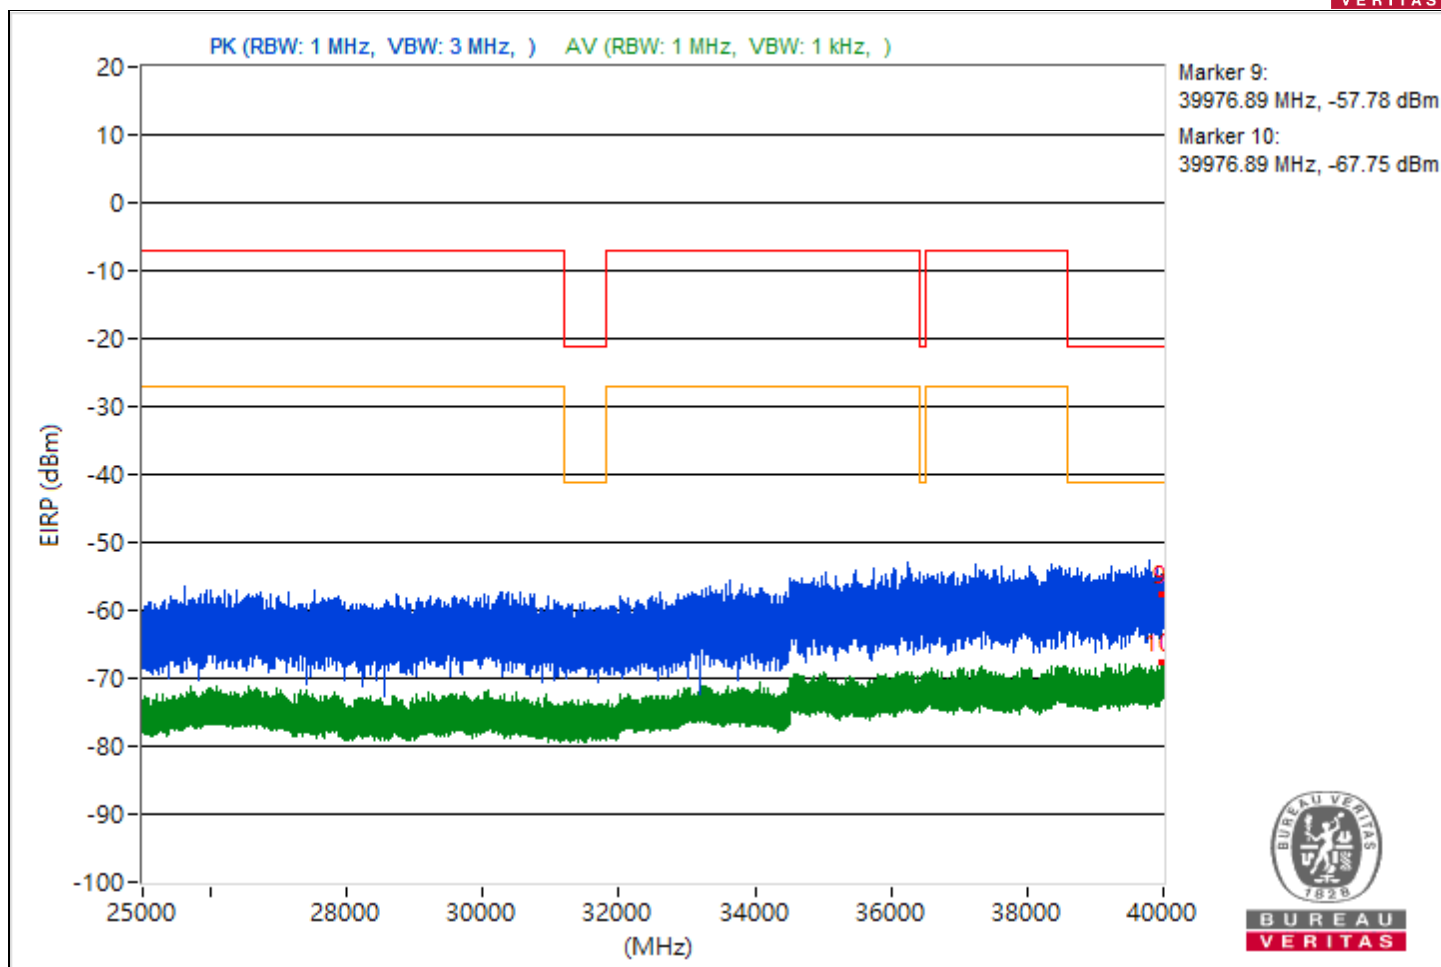



RF Mode	802.11be (EHT320) Punctured by 40 MHz	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5452.54	48.99 PK	74	-25.01	-51.43	5.16	-46.27
2	5452.54	31.85 AV	54	-22.15	-68.57	5.16	-63.41
3	7264.46	49.95 PK	74	-24.05	-50.47	5.16	-45.31
4	7264.46	30.58 AV	54	-23.42	-69.84	5.16	-64.68
5	19155.1	50.92 PK	74	-23.08	-49.5	5.16	-44.34
6	19155.1	31.75 AV	54	-22.25	-68.67	5.16	-63.51
7	23986.7	52.91 PK	74	-21.09	-47.51	5.16	-42.35
8	23986.7	32.92 AV	54	-21.08	-67.5	5.16	-62.34
9	39632.27	35.97 PK	74	-38.03	-64.45	5.16	-59.29
10	39632.27	27.47 AV	54	-26.53	-72.95	5.16	-67.79

Note: Margin value = Emission Level - Limit value

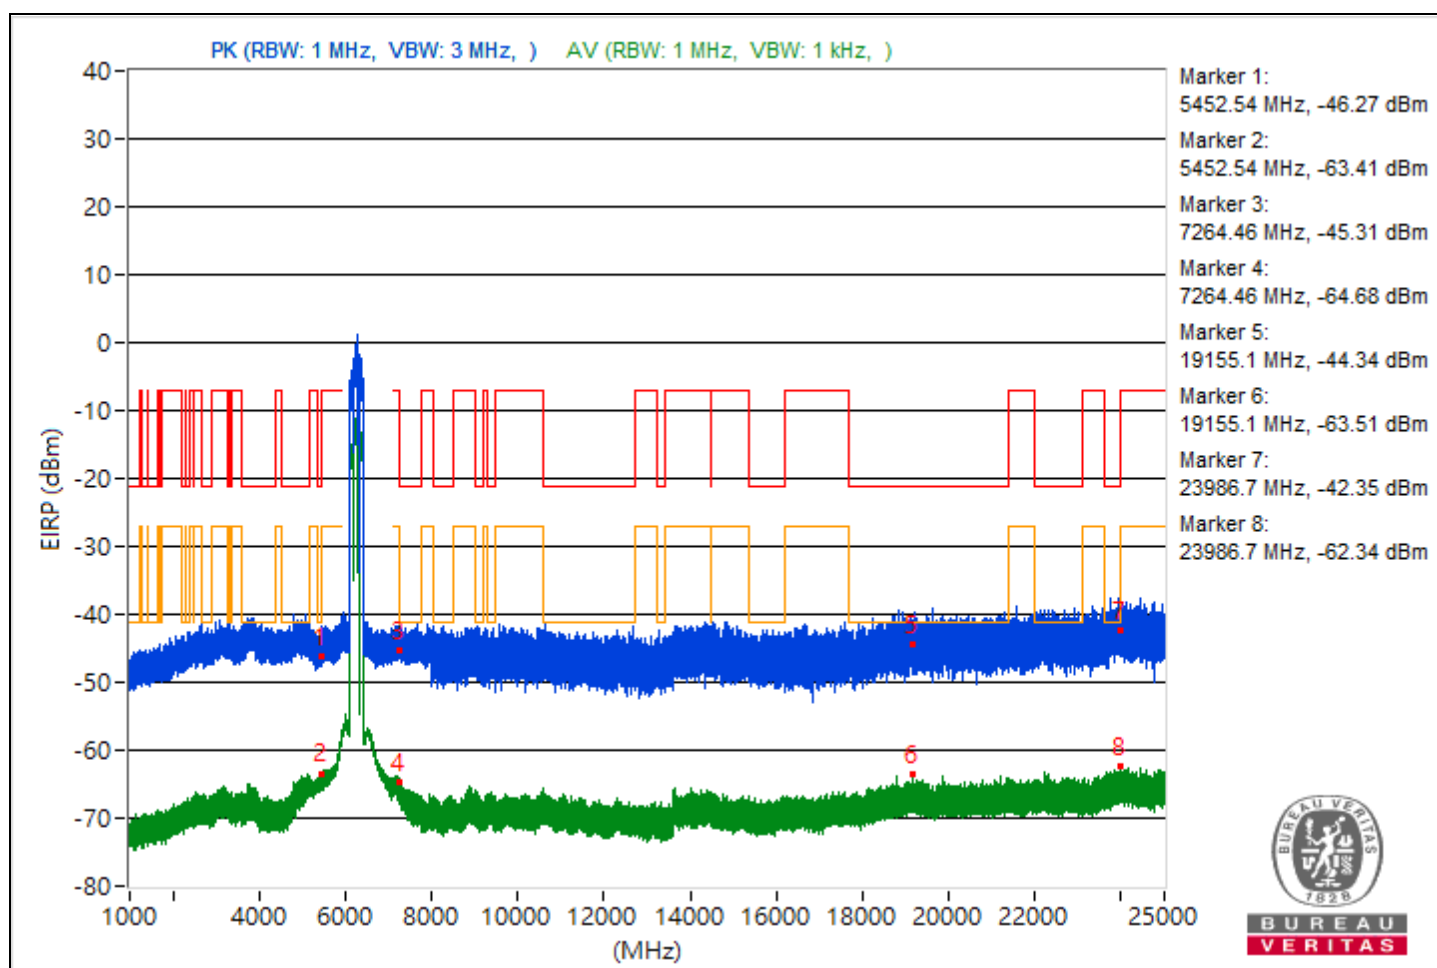

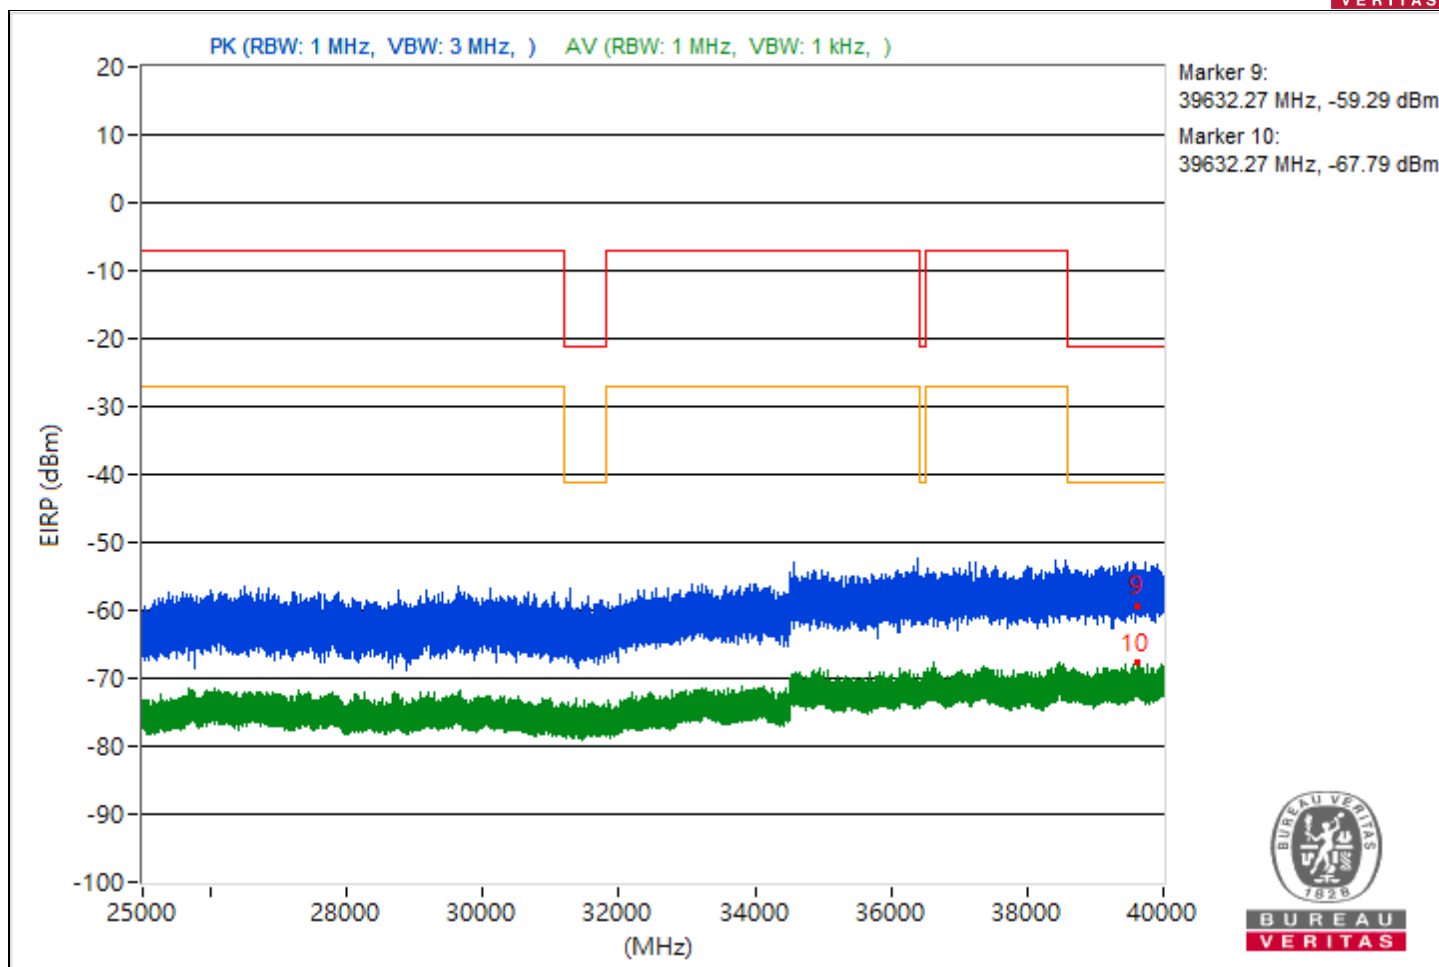



RF Mode	802.11be (EHT320) Punctured by 80 MHz	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5455.42	49.04 PK	74	-24.96	-51.38	5.16	-46.22
2	5455.42	31.69 AV	54	-22.31	-68.73	5.16	-63.57
3	7251.31	49.02 PK	74	-24.98	-51.4	5.16	-46.24
4	7251.31	30.6 AV	54	-23.4	-69.82	5.16	-64.66
5	20654.1	53.43 PK	74	-20.57	-46.99	5.16	-41.83
6	20654.1	31.42 AV	54	-22.58	-69	5.16	-63.84
7	23924.3	54.45 PK	74	-19.55	-45.97	5.16	-40.81
8	23924.3	32.48 AV	54	-21.52	-67.94	5.16	-62.78
9	39935.47	37.02 PK	74	-36.98	-63.4	5.16	-58.24
10	39935.47	27.54 AV	54	-26.46	-72.88	5.16	-67.72

Note: Margin value = Emission Level - Limit value

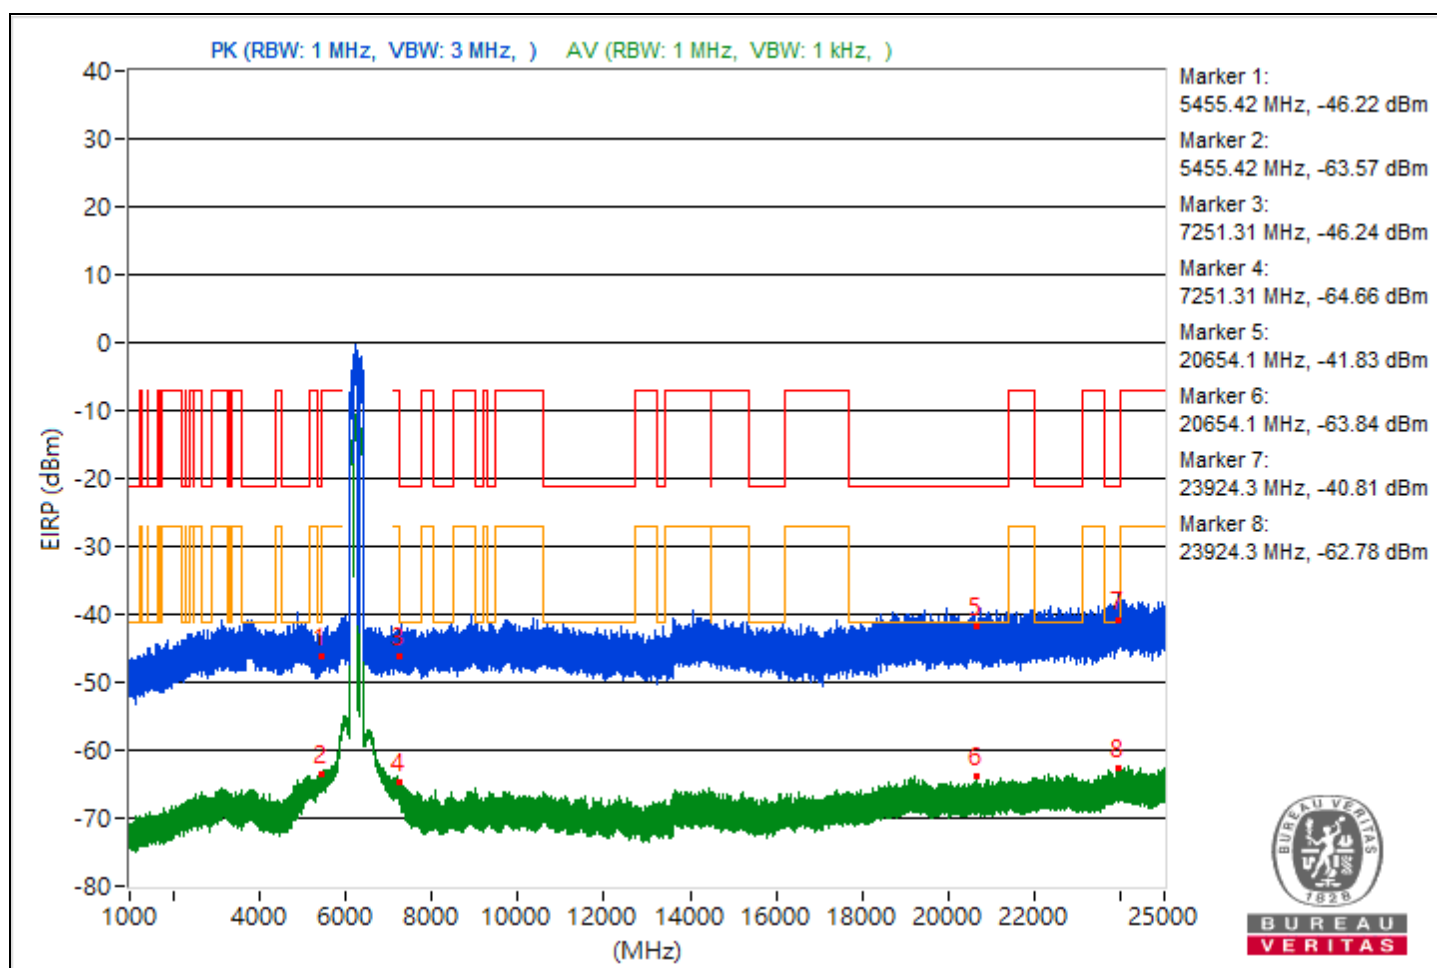

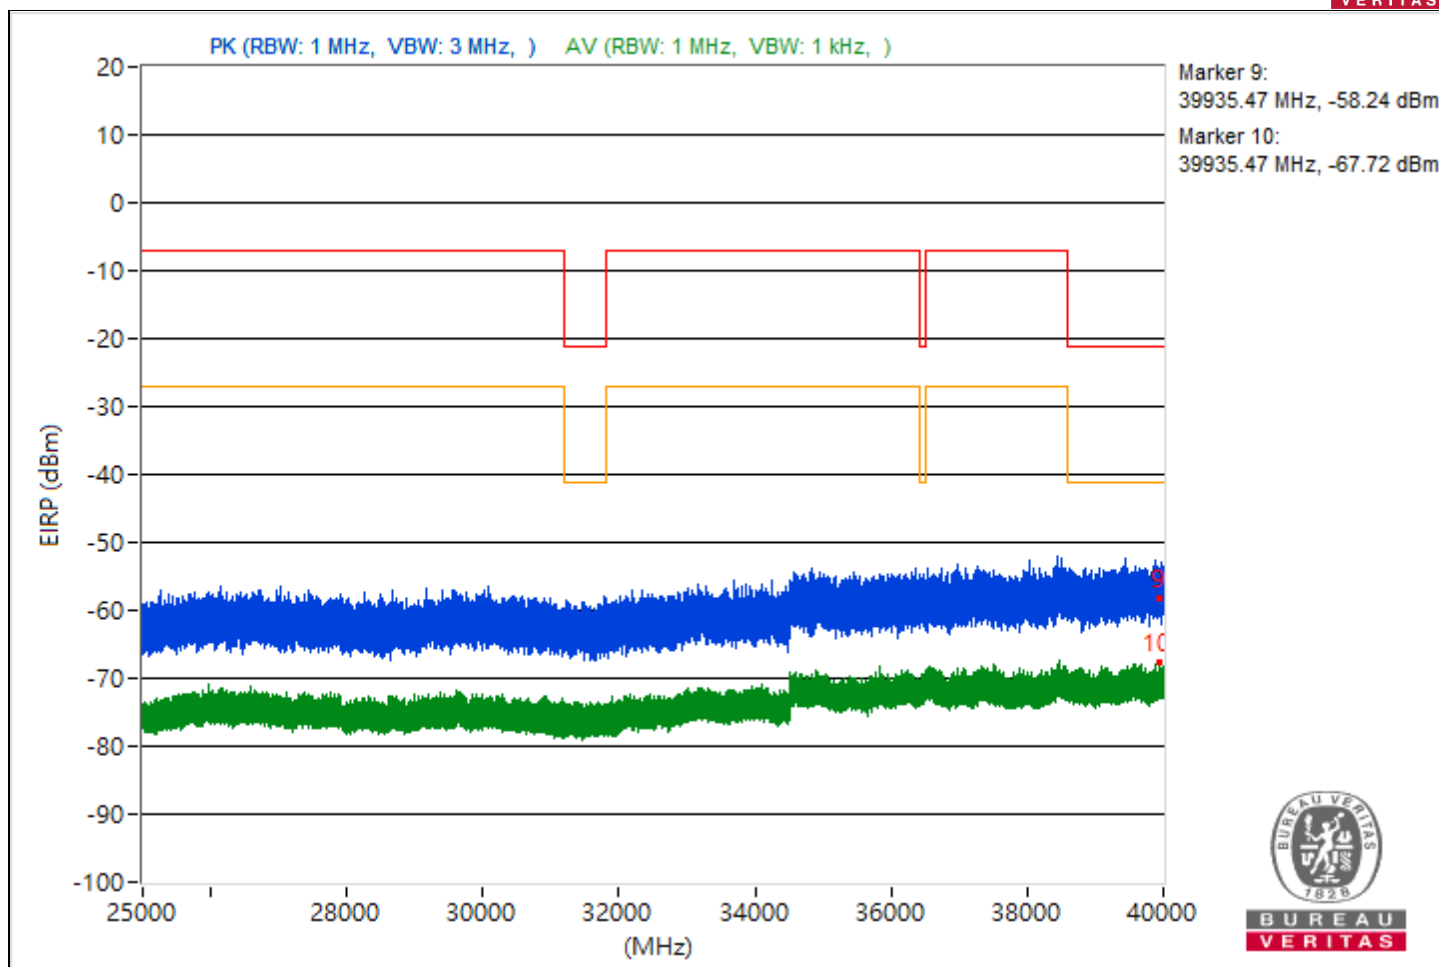



RF Mode	802.11be (EHT320) Punctured by 80+40 MHz	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5430.69	50.04 PK	74	-23.96	-50.38	5.16	-45.22
2	5430.69	32.06 AV	54	-21.94	-68.36	5.16	-63.2
3	7256.91	49.34 PK	74	-24.66	-51.08	5.16	-45.92
4	7256.91	31 AV	54	-23	-69.42	5.16	-64.26
5	21377.8	50.57 PK	74	-23.43	-49.85	5.16	-44.69
6	21377.8	31.36 AV	54	-22.64	-69.06	5.16	-63.9
7	23916.6	53.5 PK	74	-20.5	-46.92	5.16	-41.76
8	23916.6	33.18 AV	54	-20.82	-67.24	5.16	-62.08
9	39628.27	40.07 PK	74	-33.93	-60.35	5.16	-55.19
10	39628.27	27.81 AV	54	-26.19	-72.61	5.16	-67.45

Note: Margin value = Emission Level - Limit value

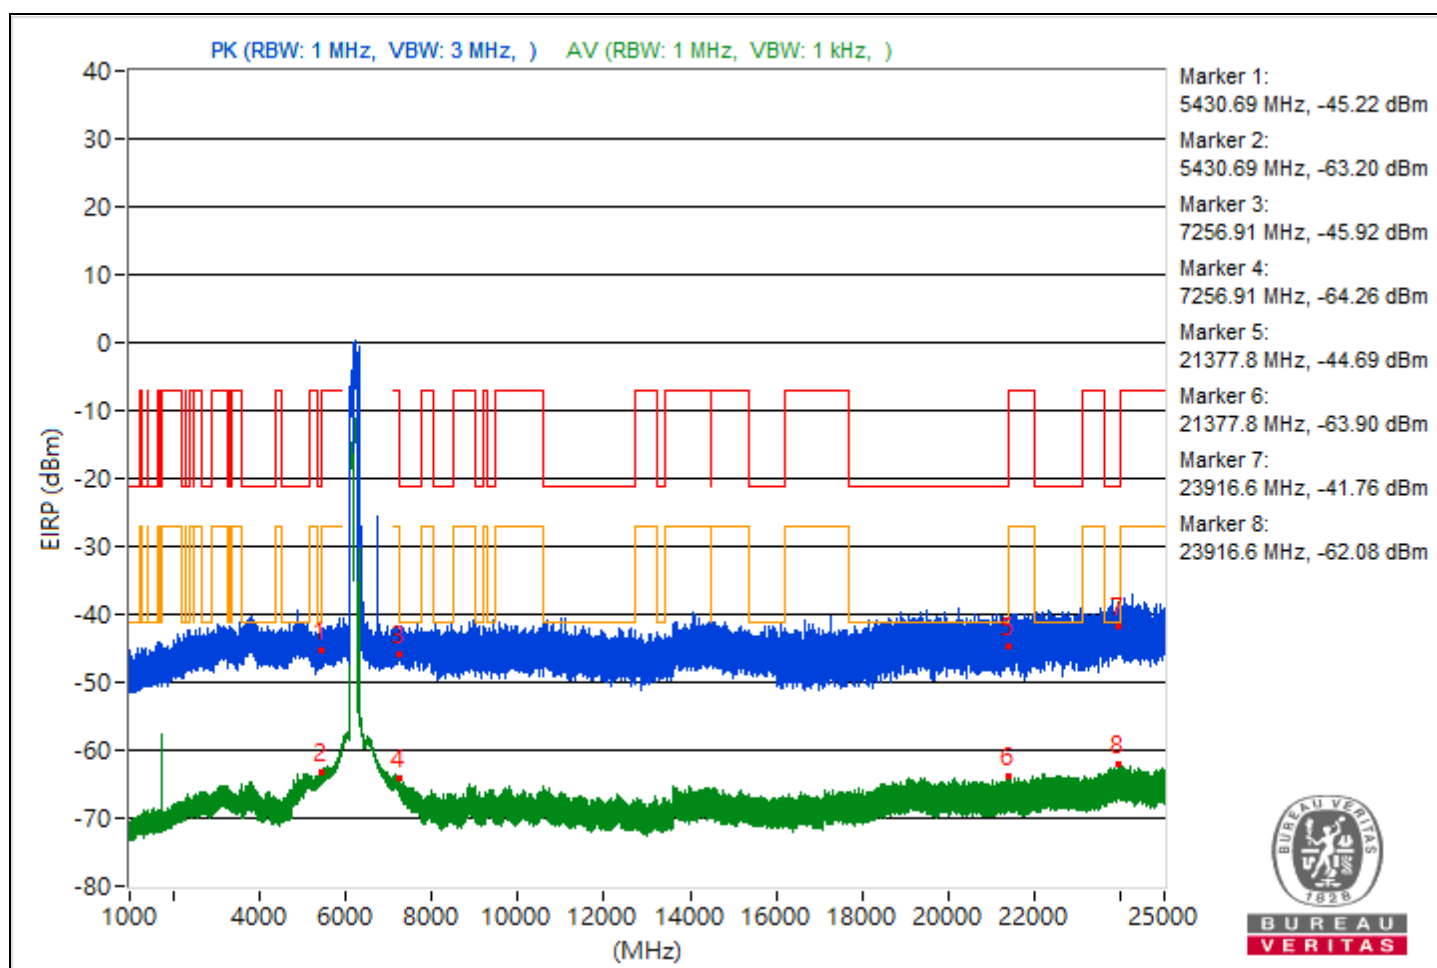

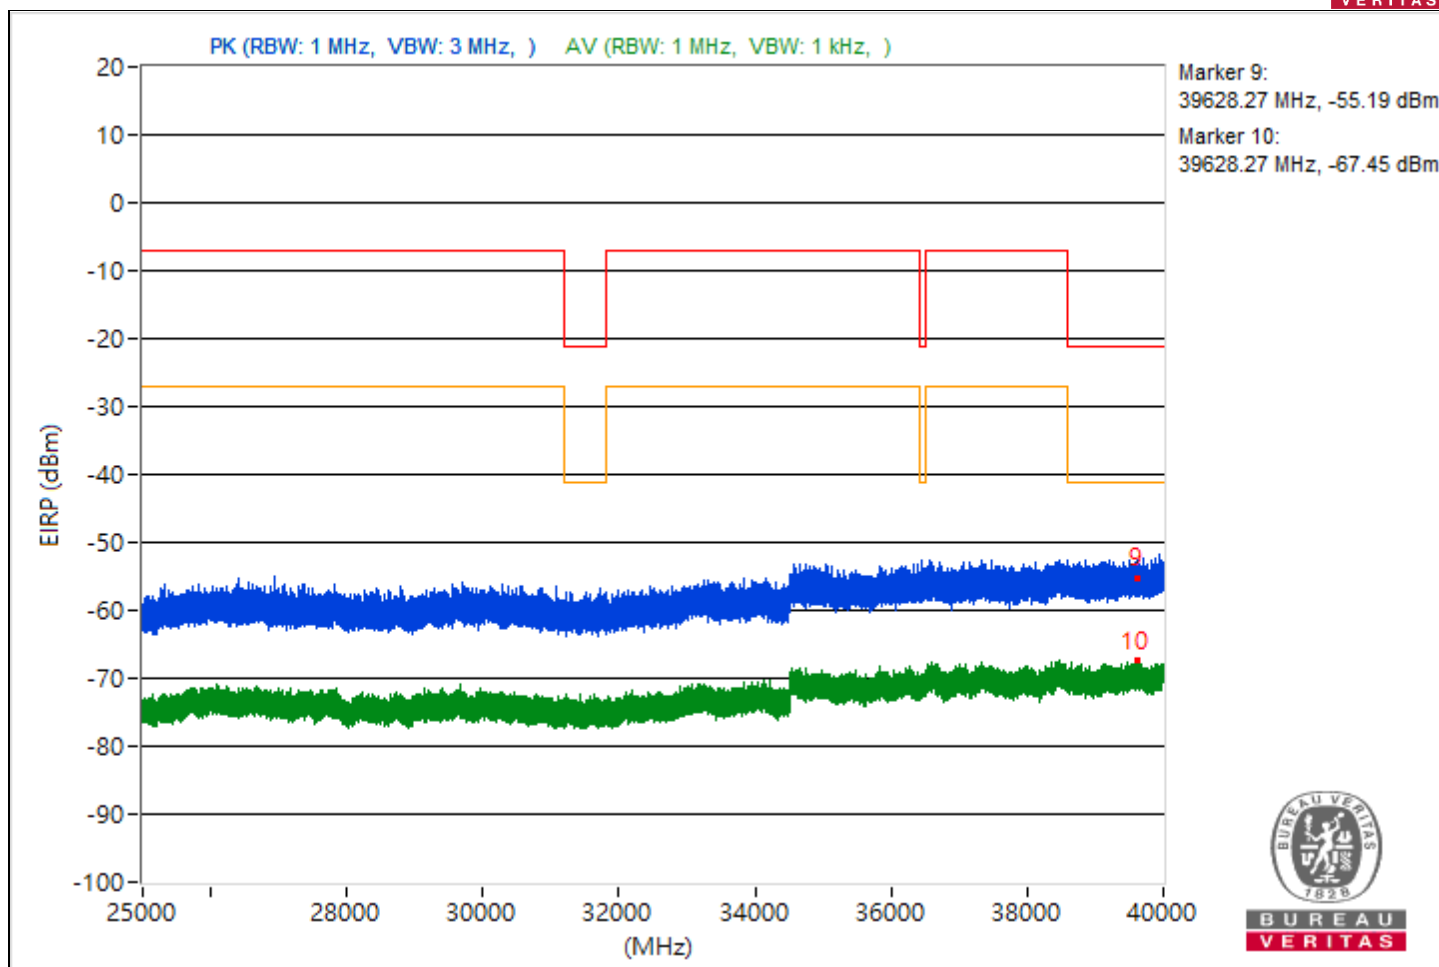


Conducted Band Edges

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5934.02	95.2 PK			-5.2	5.14	-0.06
2	*5934.02	87.15 AV			-13.25	5.14	-8.11
3	#5924.98	77.94 PK	88.26	-10.32	-22.46	5.14	-17.32
4	#5924.98	64.24 AV	68.26	-4.02	-36.16	5.14	-31.02

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

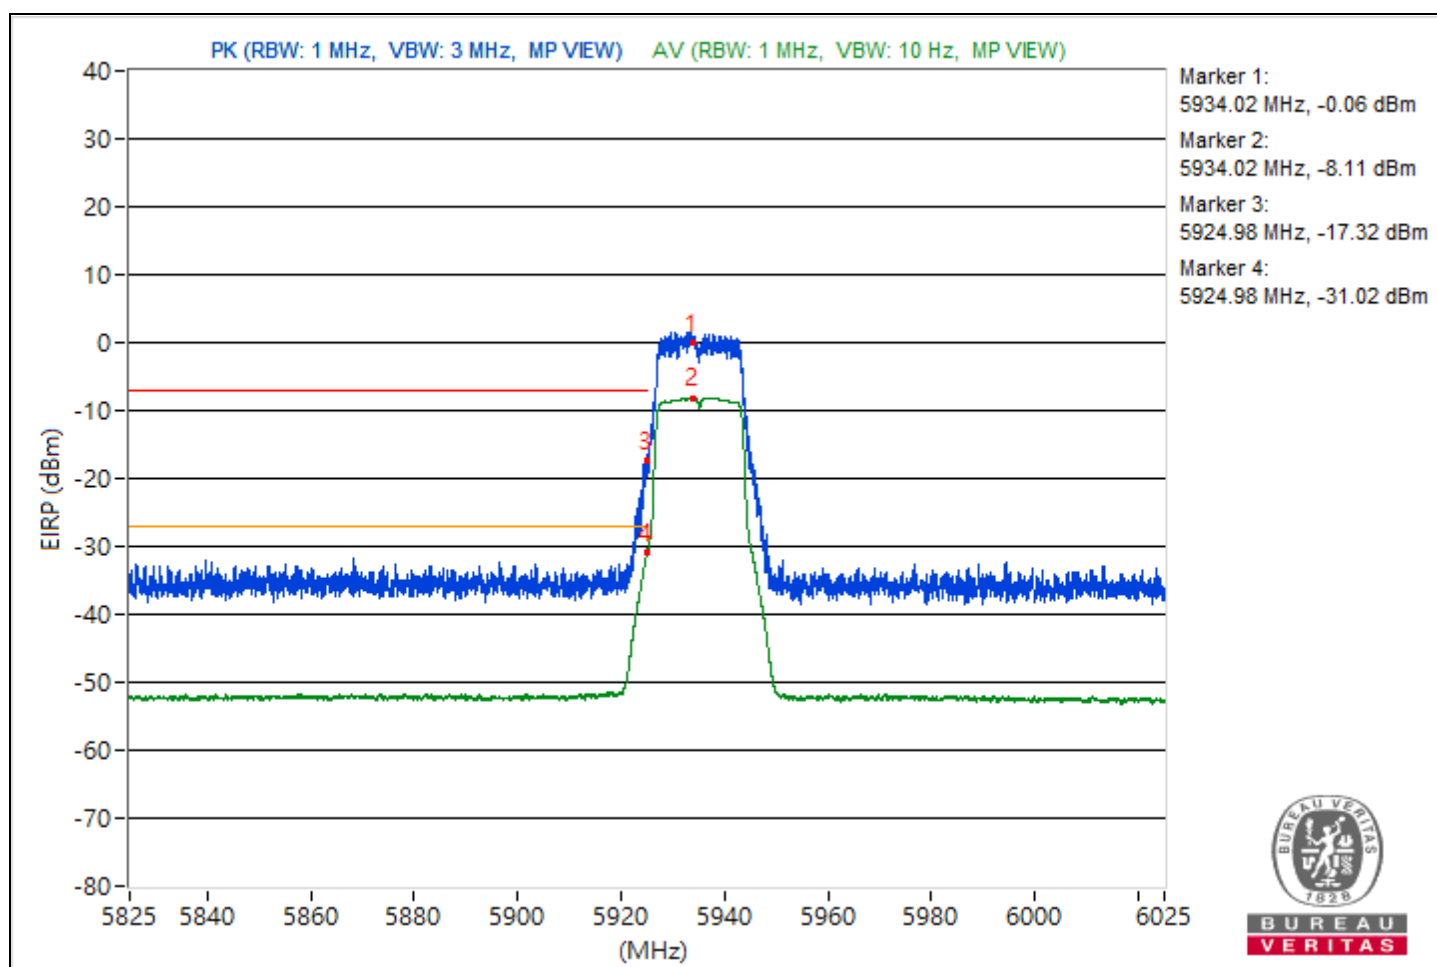


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5954.3	95.55 PK			-4.85	5.14	0.29
2	*5954.3	88.03 AV			-12.37	5.14	-7.23
3	#5924.25	59.48 PK	88.26	-28.78	-40.92	5.14	-35.78
4	#5924.25	44.03 AV	68.26	-24.23	-56.37	5.14	-51.23

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

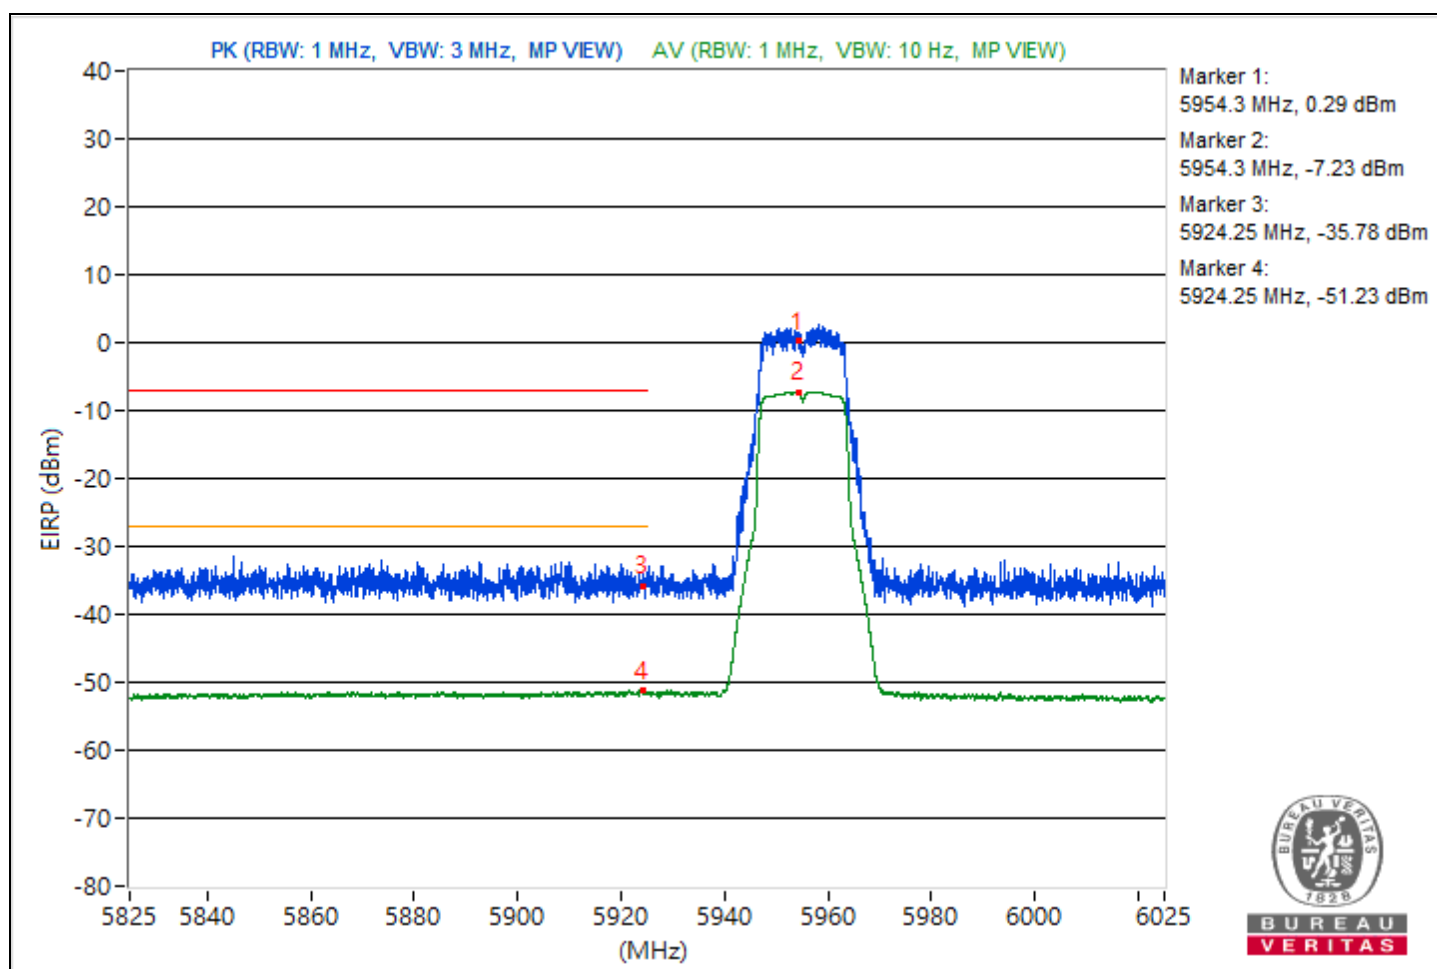


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6857.63	96.31 PK			-4.11	5.16	1.05
2	*6857.63	87.3 AV			-13.12	5.16	-7.96
3	#7211.48	52.3 PK	88.26	-35.96	-48.12	5.16	-42.96
4	#7211.48	35.9 AV	68.26	-32.36	-64.52	5.16	-59.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

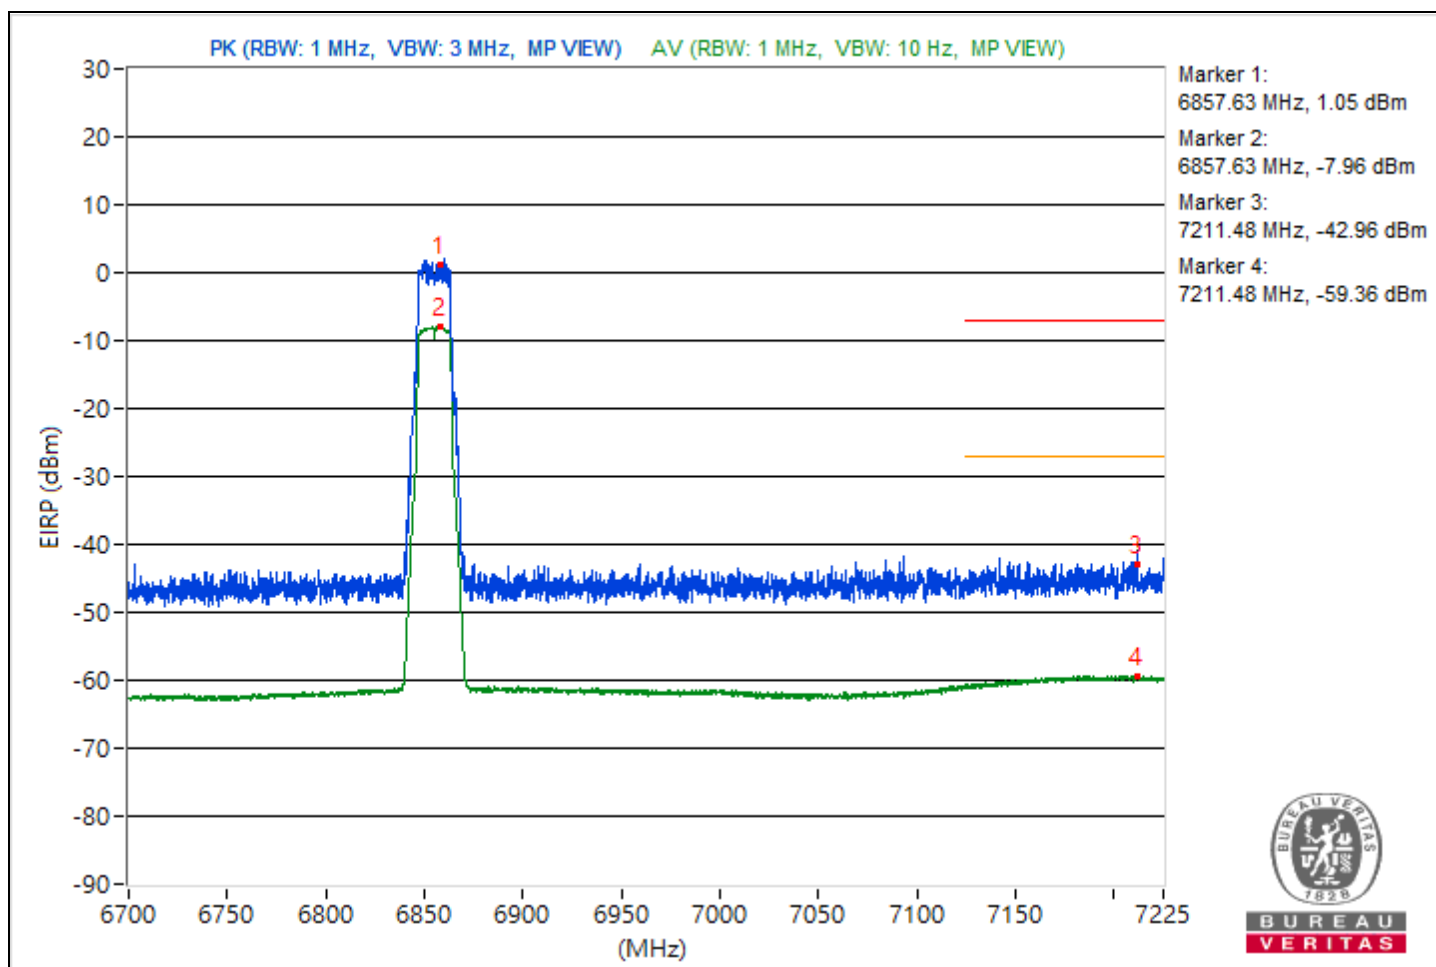


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5933.57	92.39 PK			-8.01	5.14	-2.87
2	*5933.57	80.81 AV			-19.59	5.14	-14.45
3	#5924.98	78.46 PK	88.26	-9.8	-21.94	5.14	-16.8
4	#5924.98	66.75 AV	68.26	-1.51	-33.65	5.14	-28.51

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

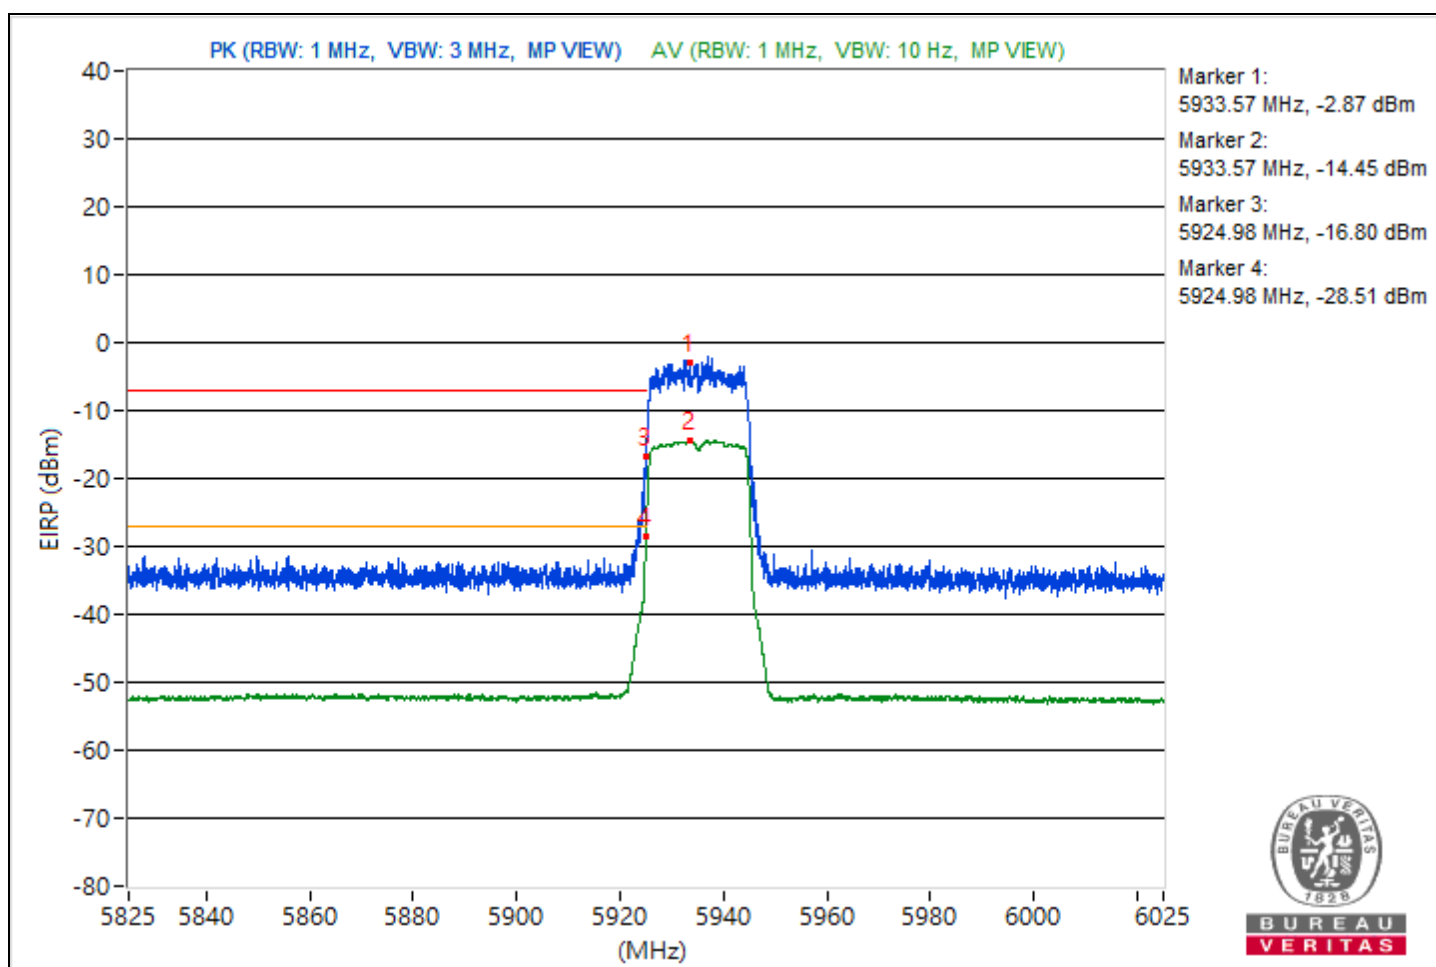


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5952.82	96.89 PK			-3.51	5.14	1.63
2	*5952.82	87.17 AV			-13.23	5.14	-8.09
3	#5908.45	59.87 PK	88.26	-28.39	-40.53	5.14	-35.39
4	#5908.45	44.02 AV	68.26	-24.24	-56.38	5.14	-51.24

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

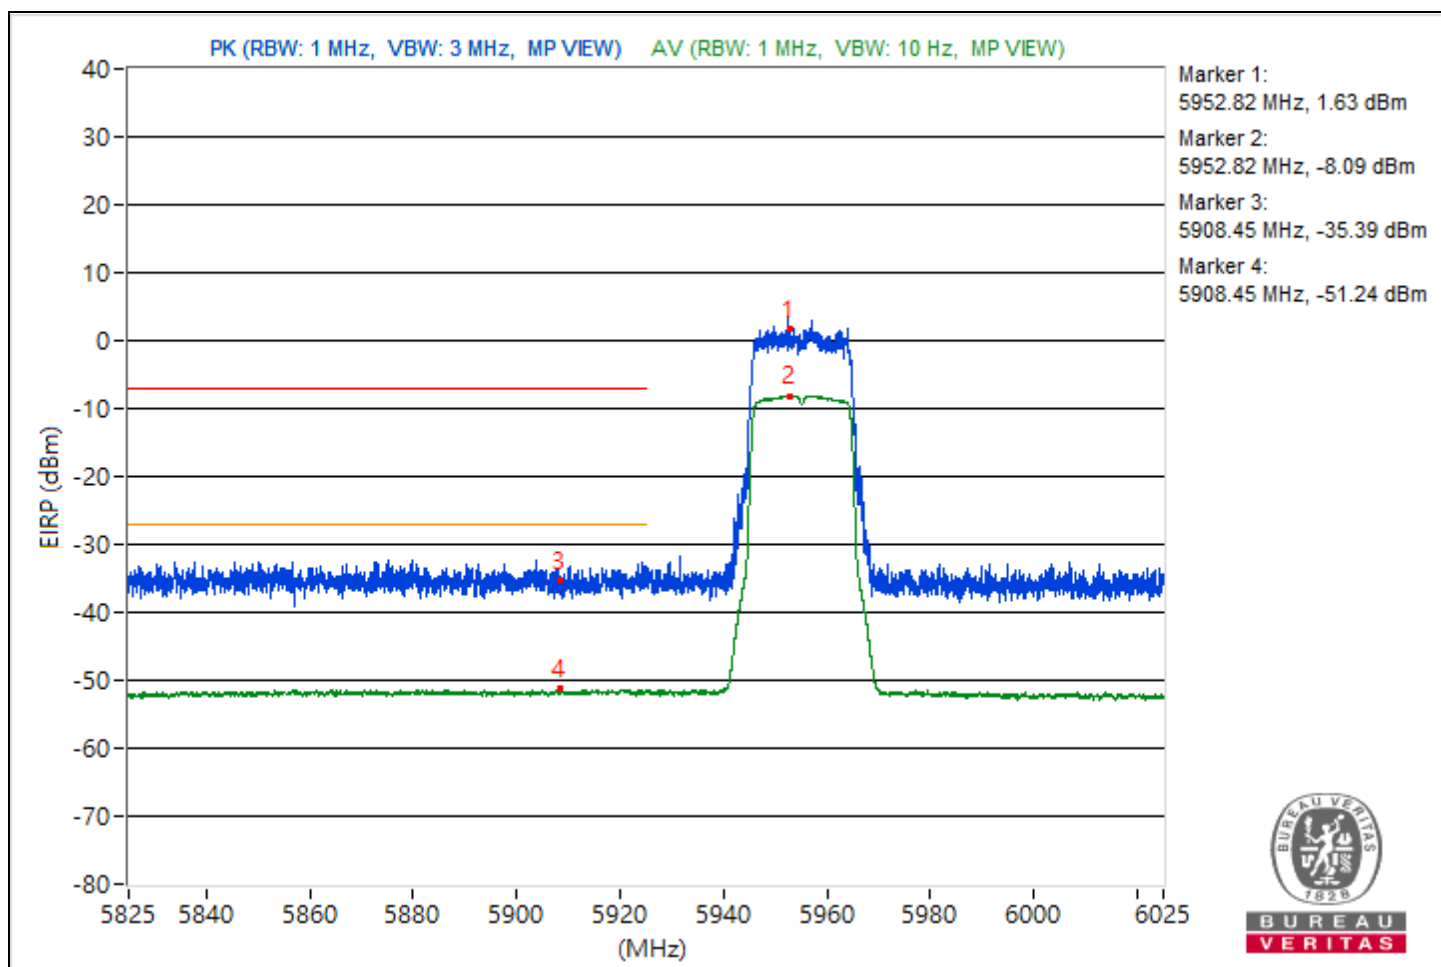


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6856.58	96.36 PK			-4.06	5.16	1.1
2	*6856.58	87.71 AV			-12.71	5.16	-7.55
3	#7180.18	50.54 PK	88.26	-37.72	-49.88	5.16	-44.72
4	#7180.18	36.04 AV	68.26	-32.22	-64.38	5.16	-59.22

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

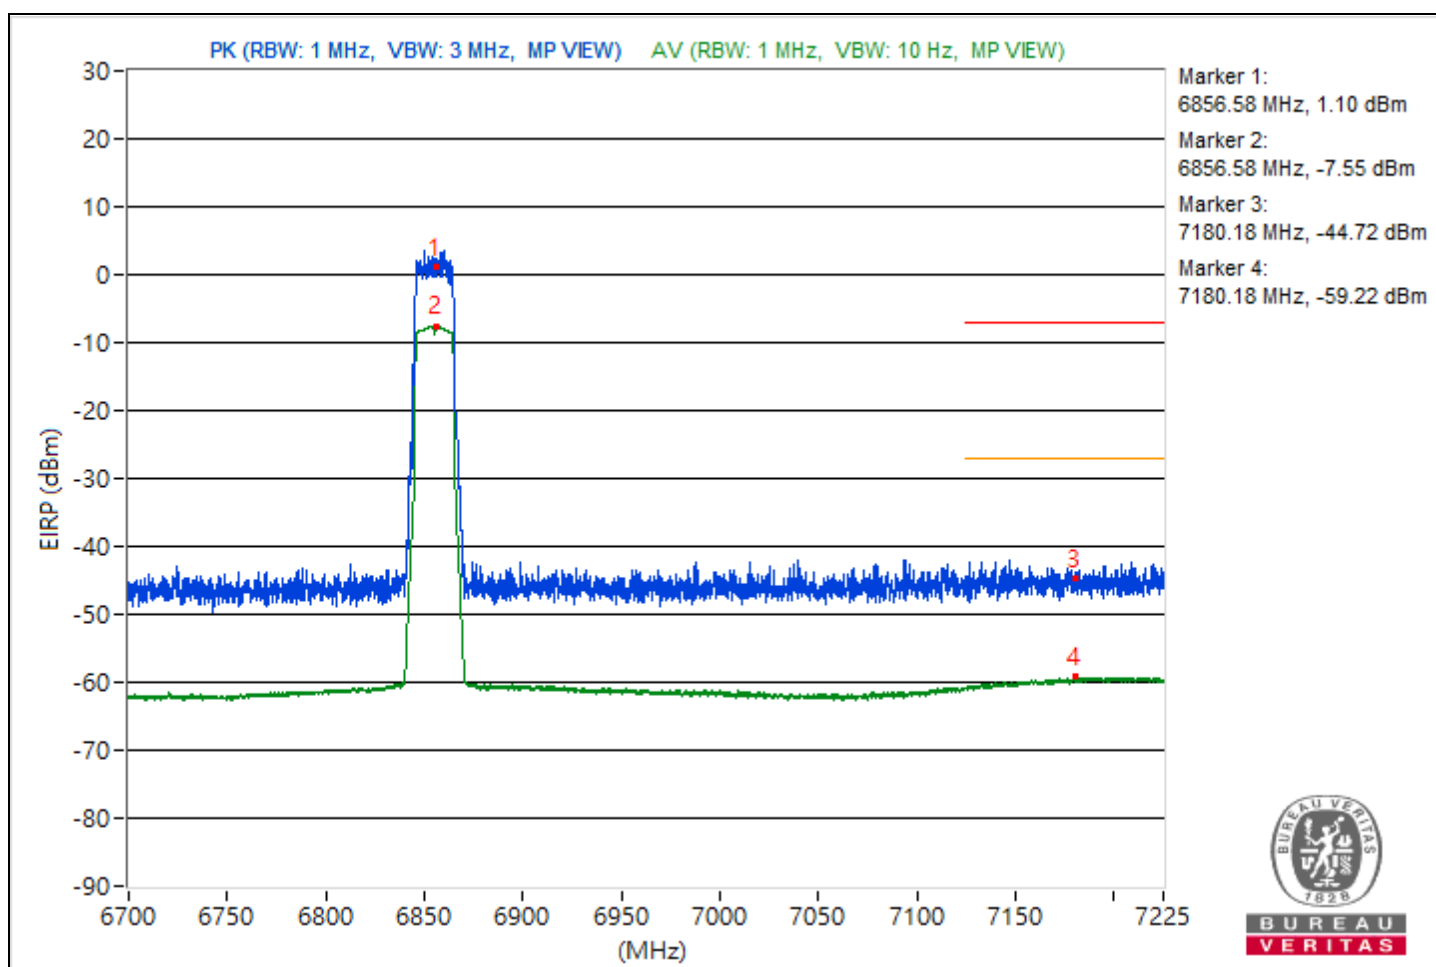


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5964.07	96.36 PK			-4.04	5.14	1.1
2	*5964.07	88.19 AV			-12.21	5.14	-7.07
3	#5917.65	59.11 PK	88.26	-29.15	-41.29	5.14	-36.15
4	#5917.65	44.12 AV	68.26	-24.14	-56.28	5.14	-51.14

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

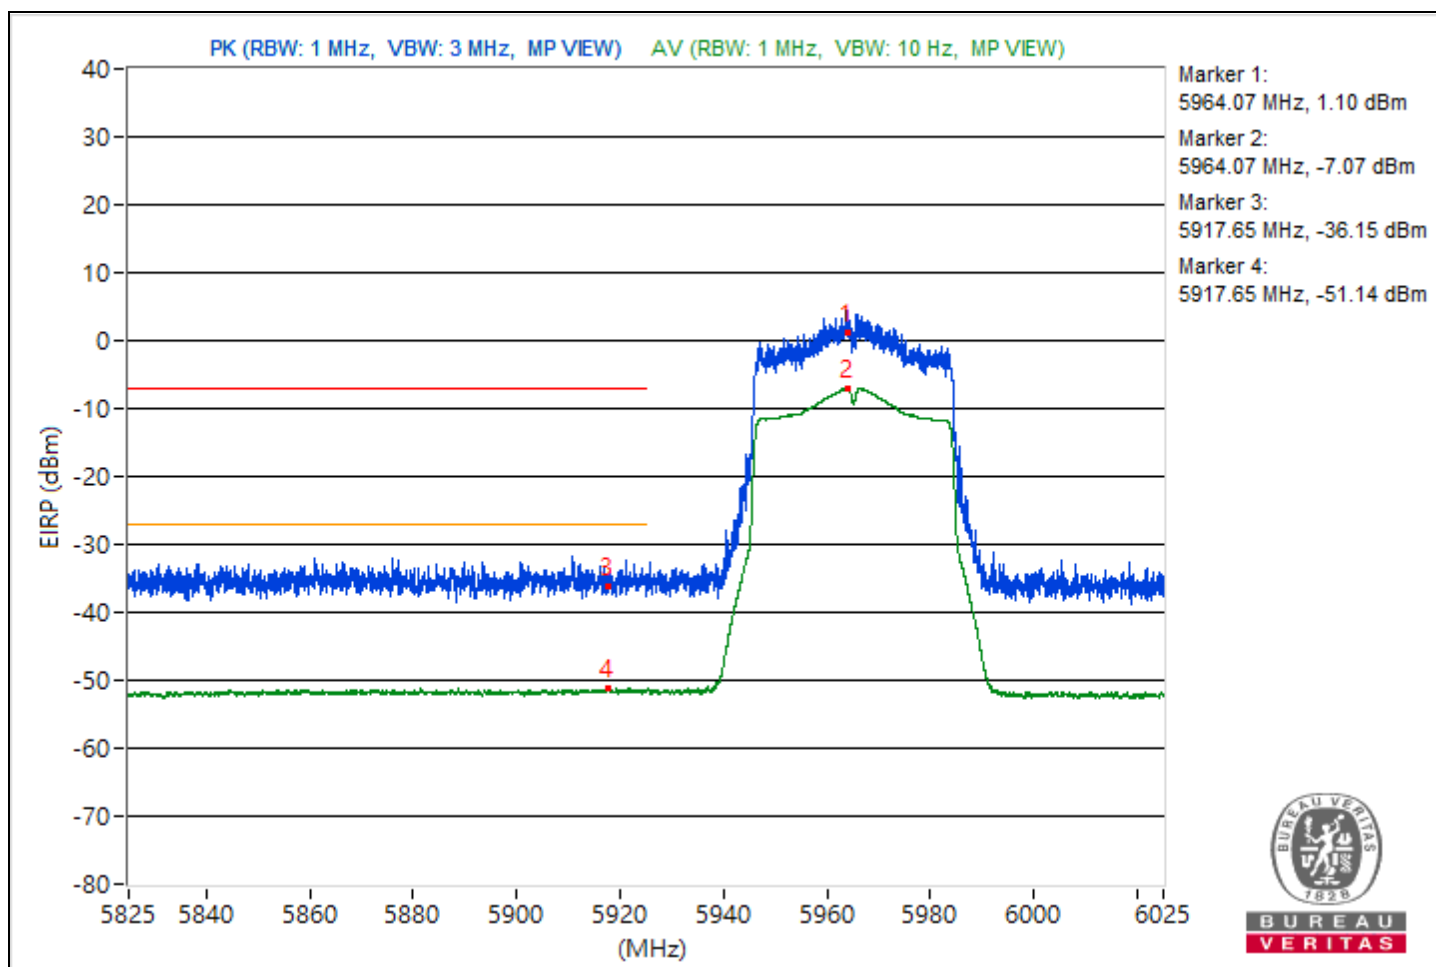


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6843.85	96.91 PK			-3.51	5.16	1.65
2	*6843.85	88.52 AV			-11.9	5.16	-6.74
3	#7203.02	50.43 PK	88.26	-37.83	-49.99	5.16	-44.83
4	#7203.02	36.25 AV	68.26	-32.01	-64.17	5.16	-59.01

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

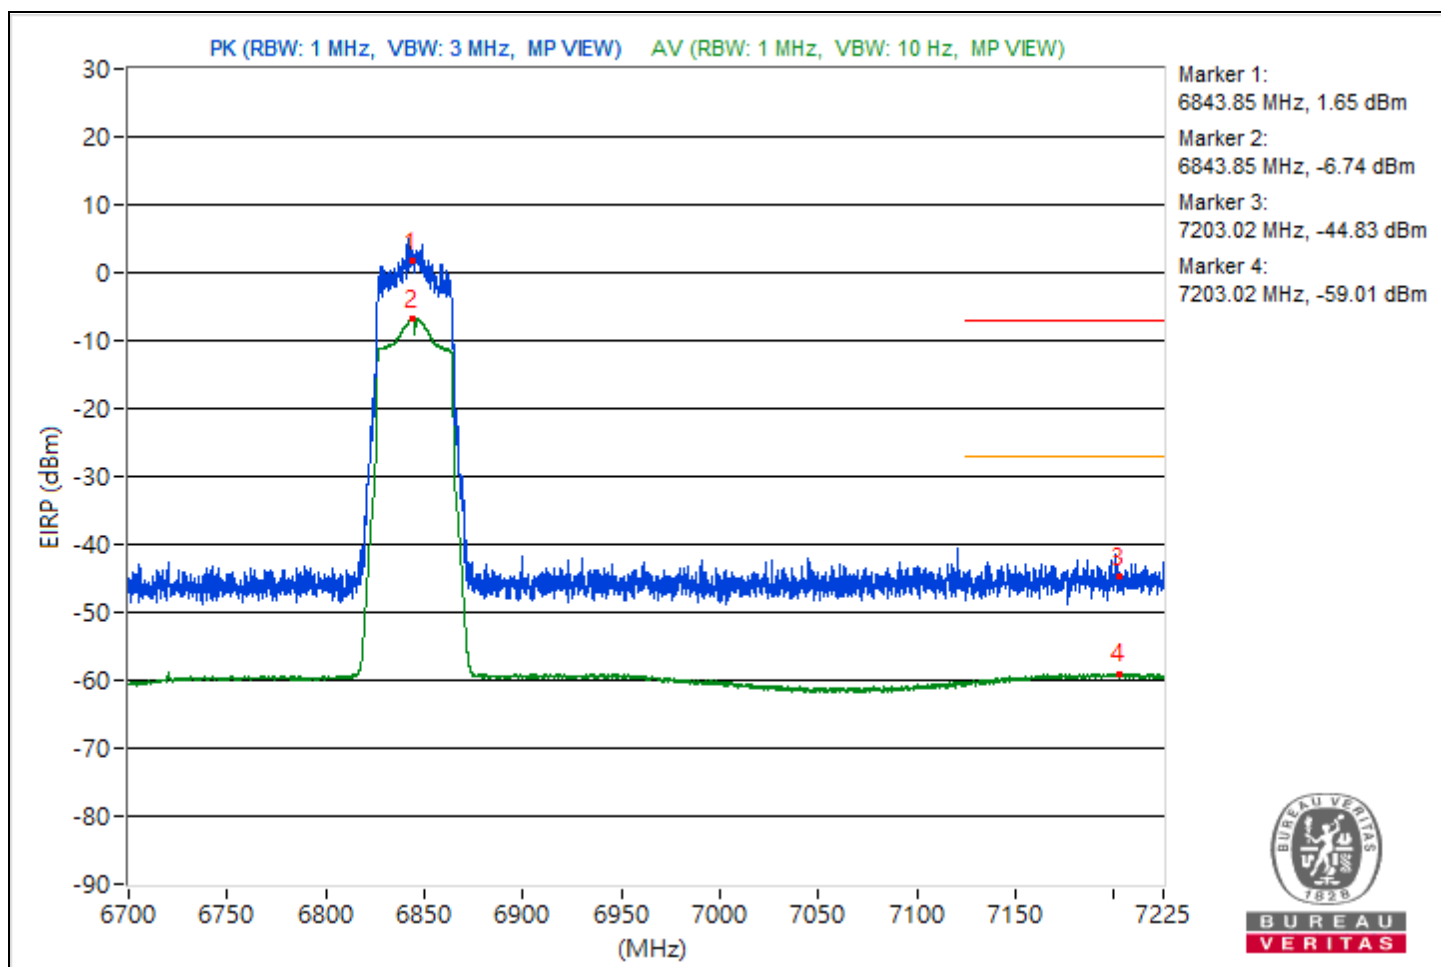


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5982.95	95.62 PK			-4.78	5.14	0.36
2	*5982.95	87.61 AV			-12.79	5.14	-7.65
3	#5919.45	60.6 PK	88.26	-27.66	-39.8	5.14	-34.66
4	#5919.45	44.55 AV	68.26	-23.71	-55.85	5.14	-50.71

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

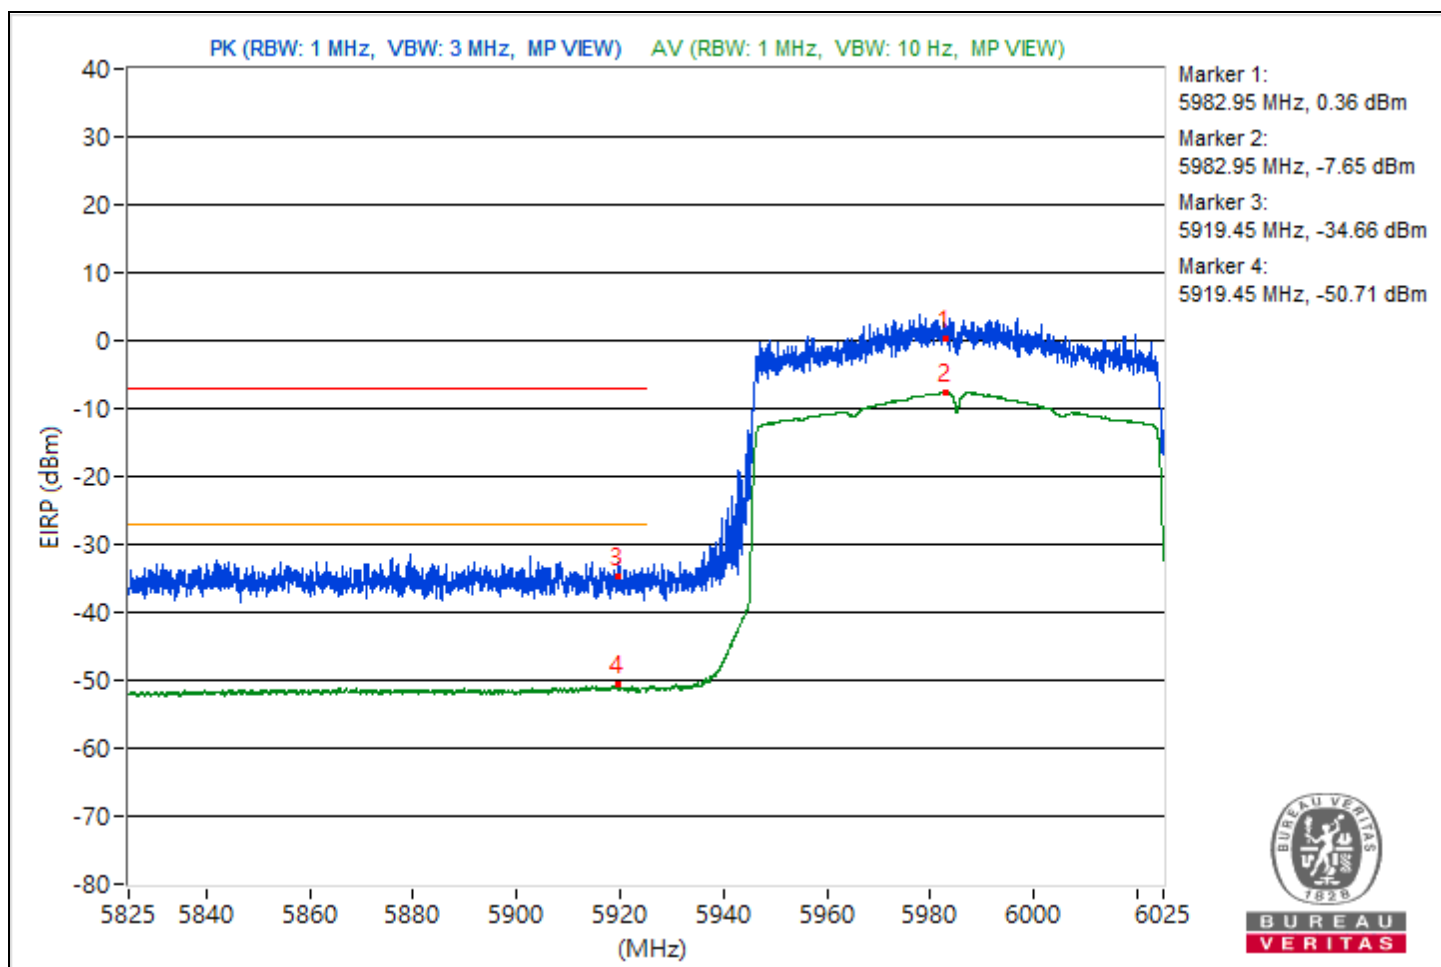


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6787.48	96.48 PK			-3.94	5.16	1.22
2	*6787.48	87.79 AV			-12.63	5.16	-7.47
3	#7209.25	50.09 PK	88.26	-38.17	-50.33	5.16	-45.17
4	#7209.25	36.18 AV	68.26	-32.08	-64.24	5.16	-59.08

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

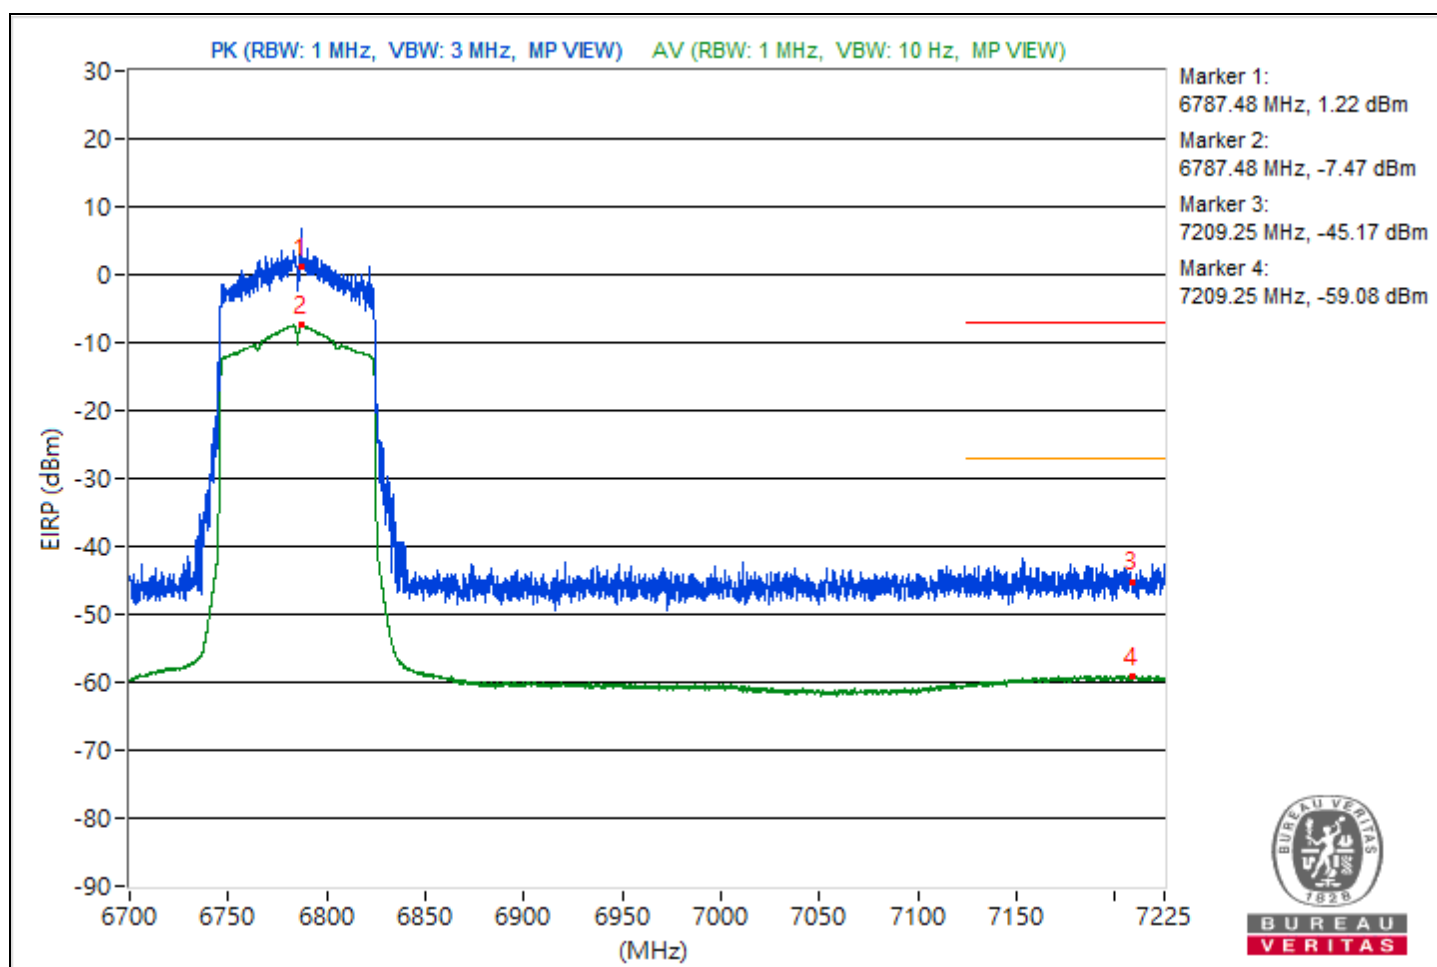


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6020.73	94.65 PK			-5.75	5.14	-0.61
2	*6020.73	85.17 AV			-15.23	5.14	-10.09
3	#5881.87	60.36 PK	88.26	-27.9	-40.04	5.14	-34.9
4	#5881.87	44.42 AV	68.26	-23.84	-55.98	5.14	-50.84

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

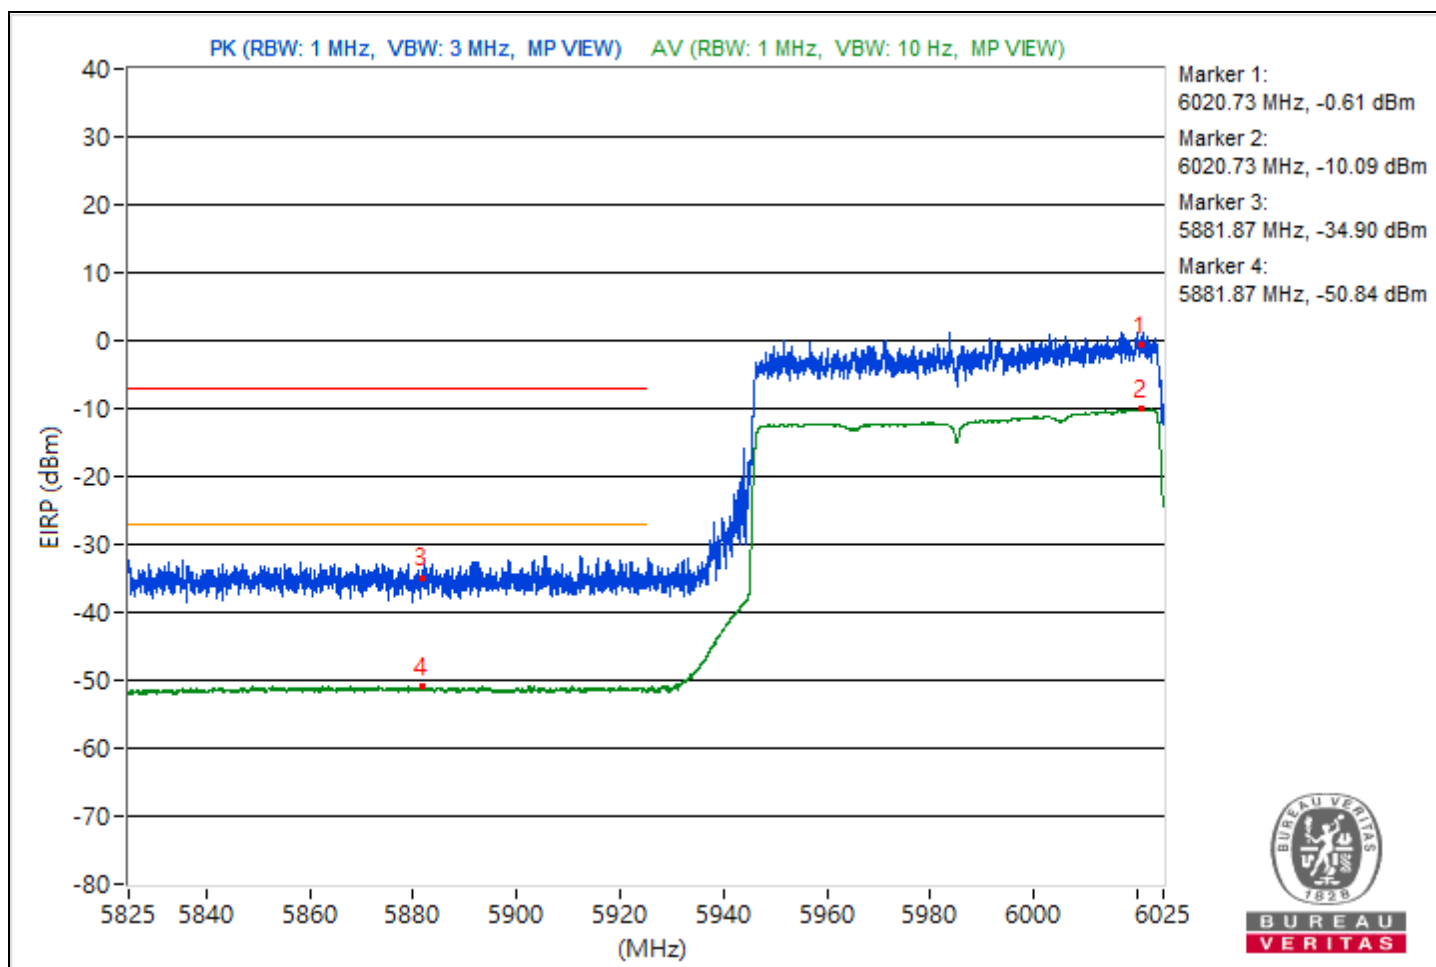


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6700.46	91.92 PK			-8.5	5.16	-3.34
2	*6700.46	82.7 AV			-17.72	5.16	-12.56
3	#7194.94	50.11 PK	88.26	-38.15	-50.31	5.16	-45.15
4	#7194.94	36.2 AV	68.26	-32.06	-64.22	5.16	-59.06

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

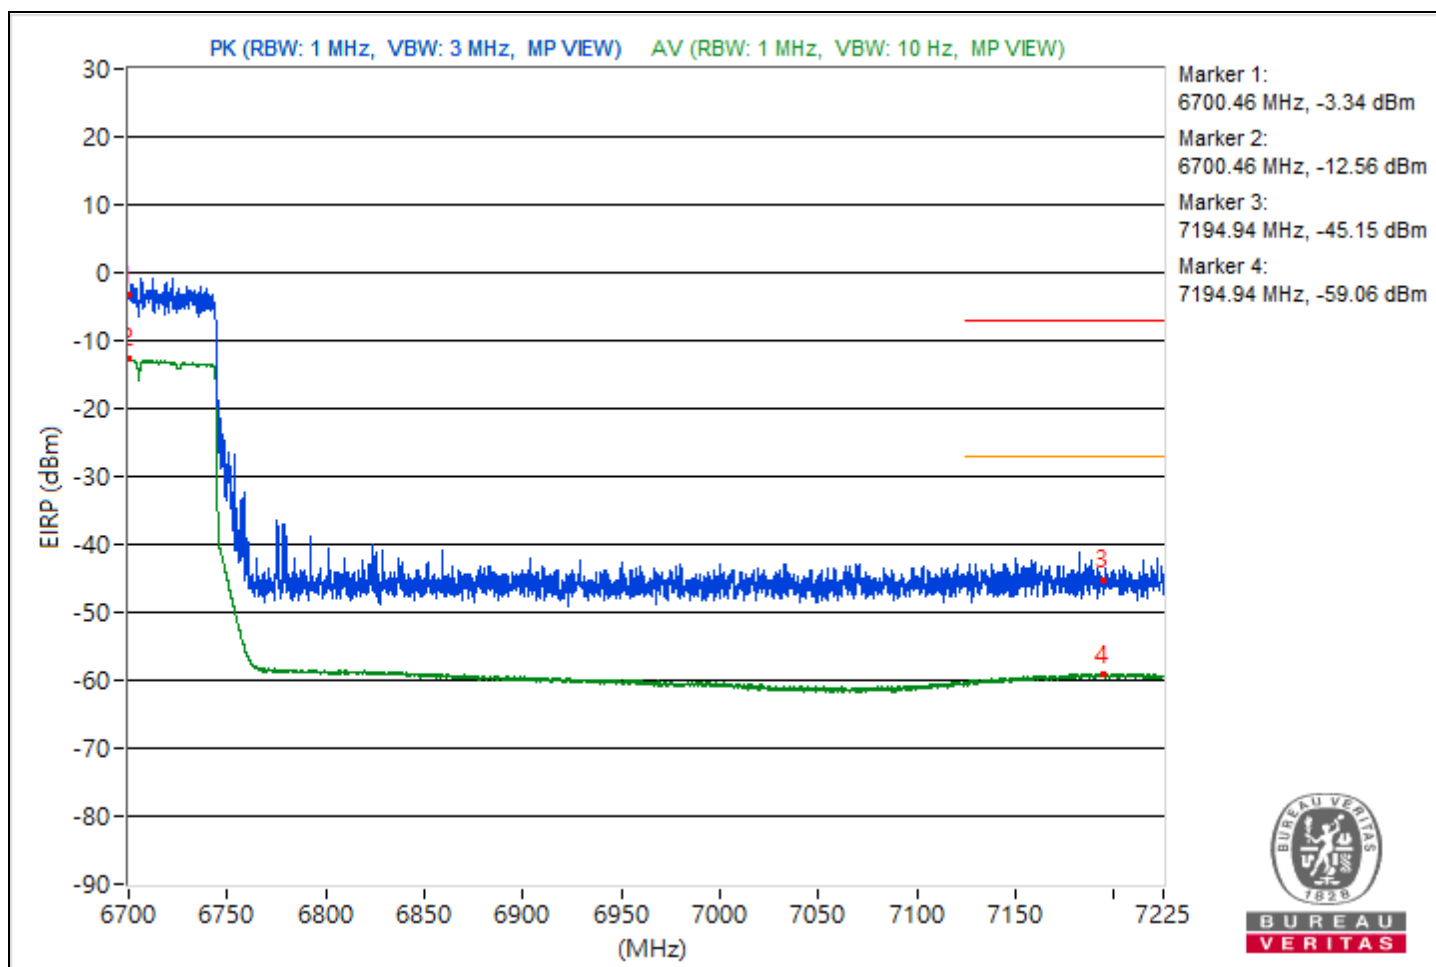


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.35	88.37 PK			-12.03	5.14	-6.89
2	*6022.35	81.75 AV			-18.65	5.14	-13.51
3	#5831.3	61.7 PK	88.26	-26.56	-38.7	5.14	-33.56
4	#5831.3	51.13 AV	68.26	-17.13	-49.27	5.14	-44.13

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

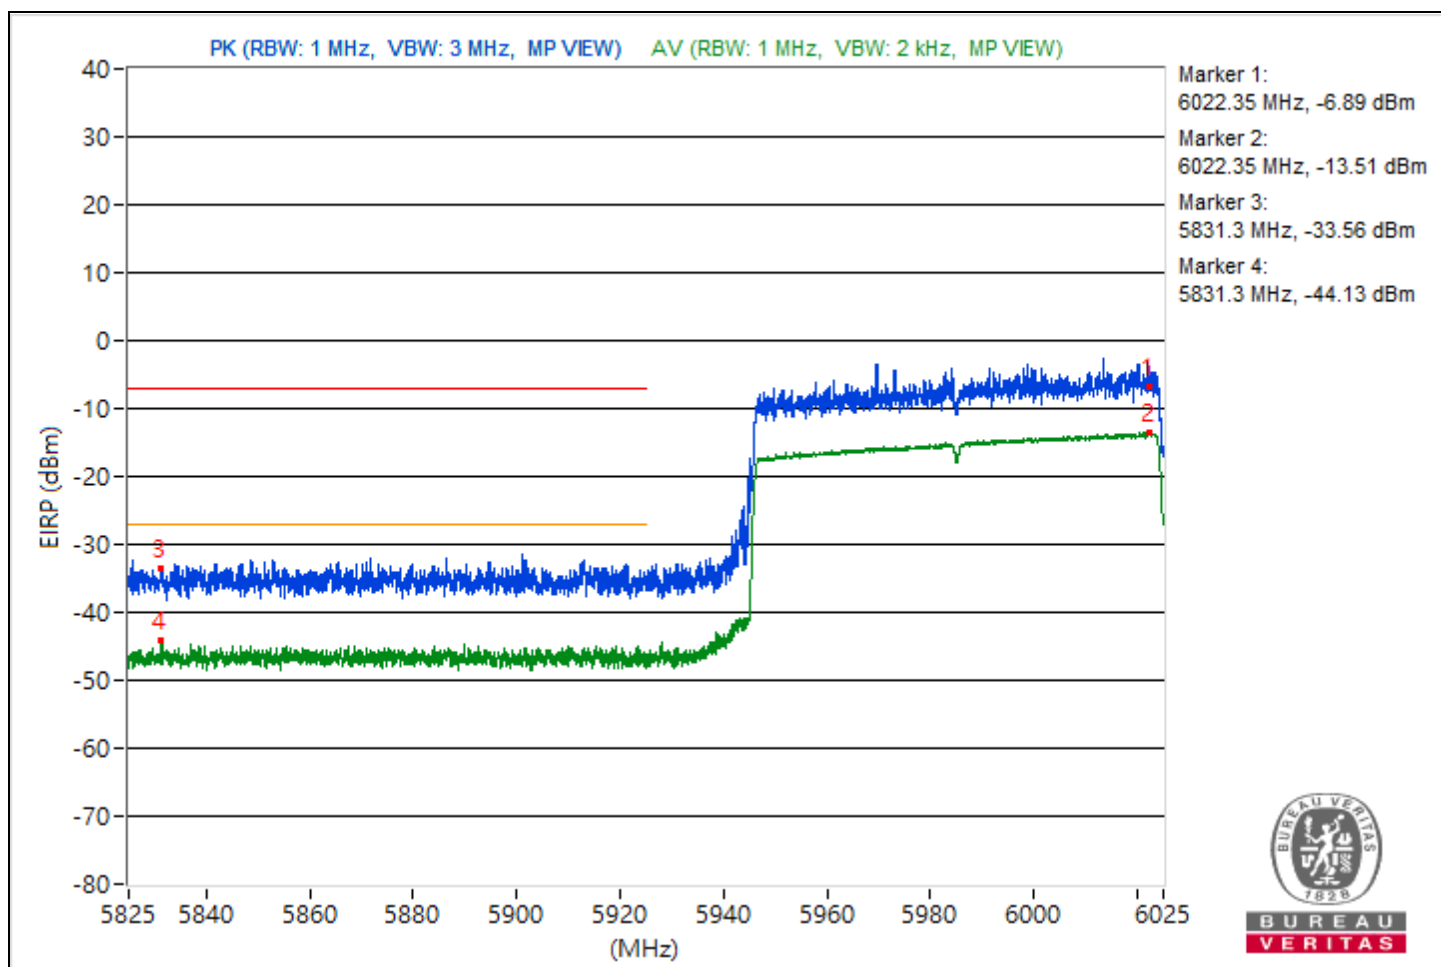


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5926.85	94.02 PK			-6.38	5.14	-1.24
2	*5926.85	84.07 AV			-16.33	5.14	-11.19
3	#5924.98	81.99 PK	88.26	-6.27	-18.41	5.14	-13.27
4	#5924.98	67.41 AV	68.26	-0.85	-32.99	5.14	-27.85

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

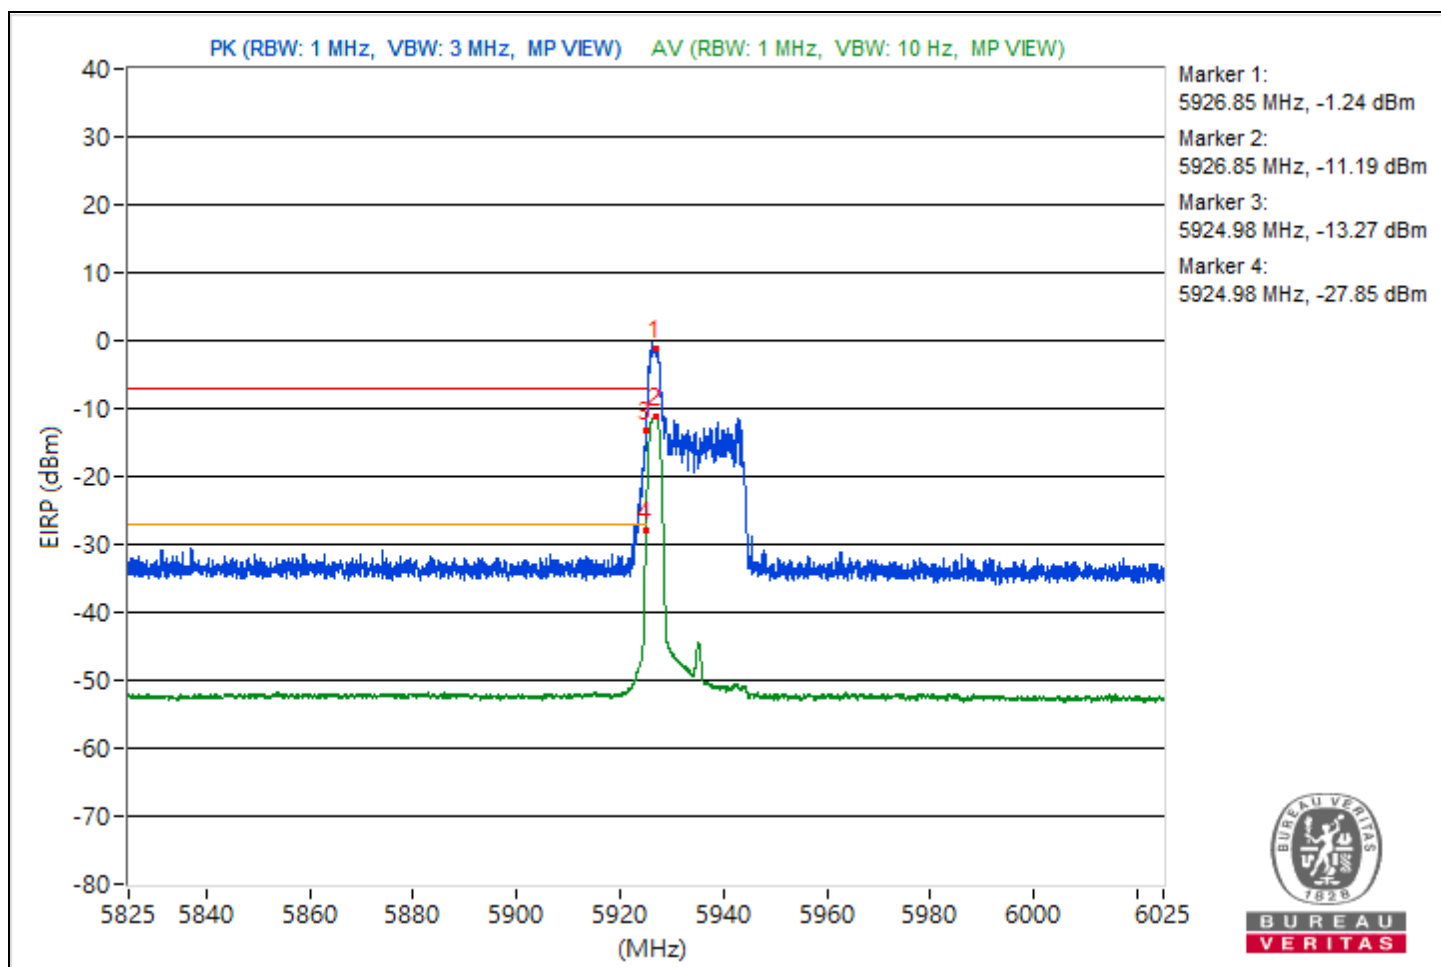


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.87	97.32 PK			-3.08	5.14	2.06
2	*5946.87	87.43 AV			-12.97	5.14	-7.83
3	#5920.98	60.38 PK	88.26	-27.88	-40.02	5.14	-34.88
4	#5920.98	44.03 AV	68.26	-24.23	-56.37	5.14	-51.23

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

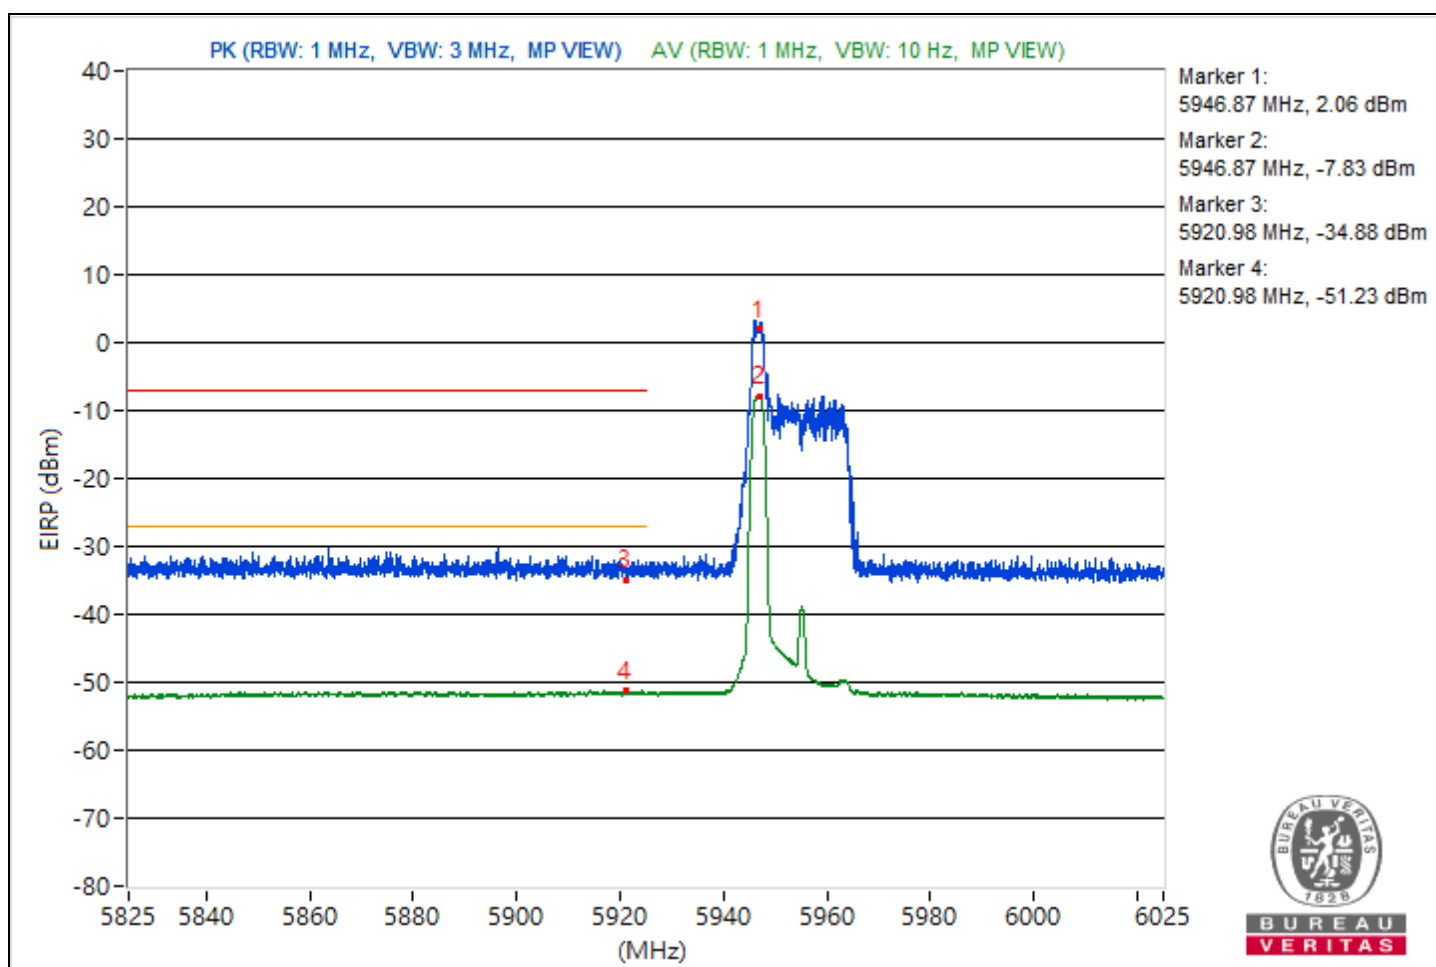


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6863.67	100.13 PK			-0.29	5.16	4.87
2	*6863.67	88.73 AV			-11.69	5.16	-6.53
3	#7204.07	51.38 PK	88.26	-36.88	-49.04	5.16	-43.88
4	#7204.07	35.73 AV	68.26	-32.53	-64.69	5.16	-59.53

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

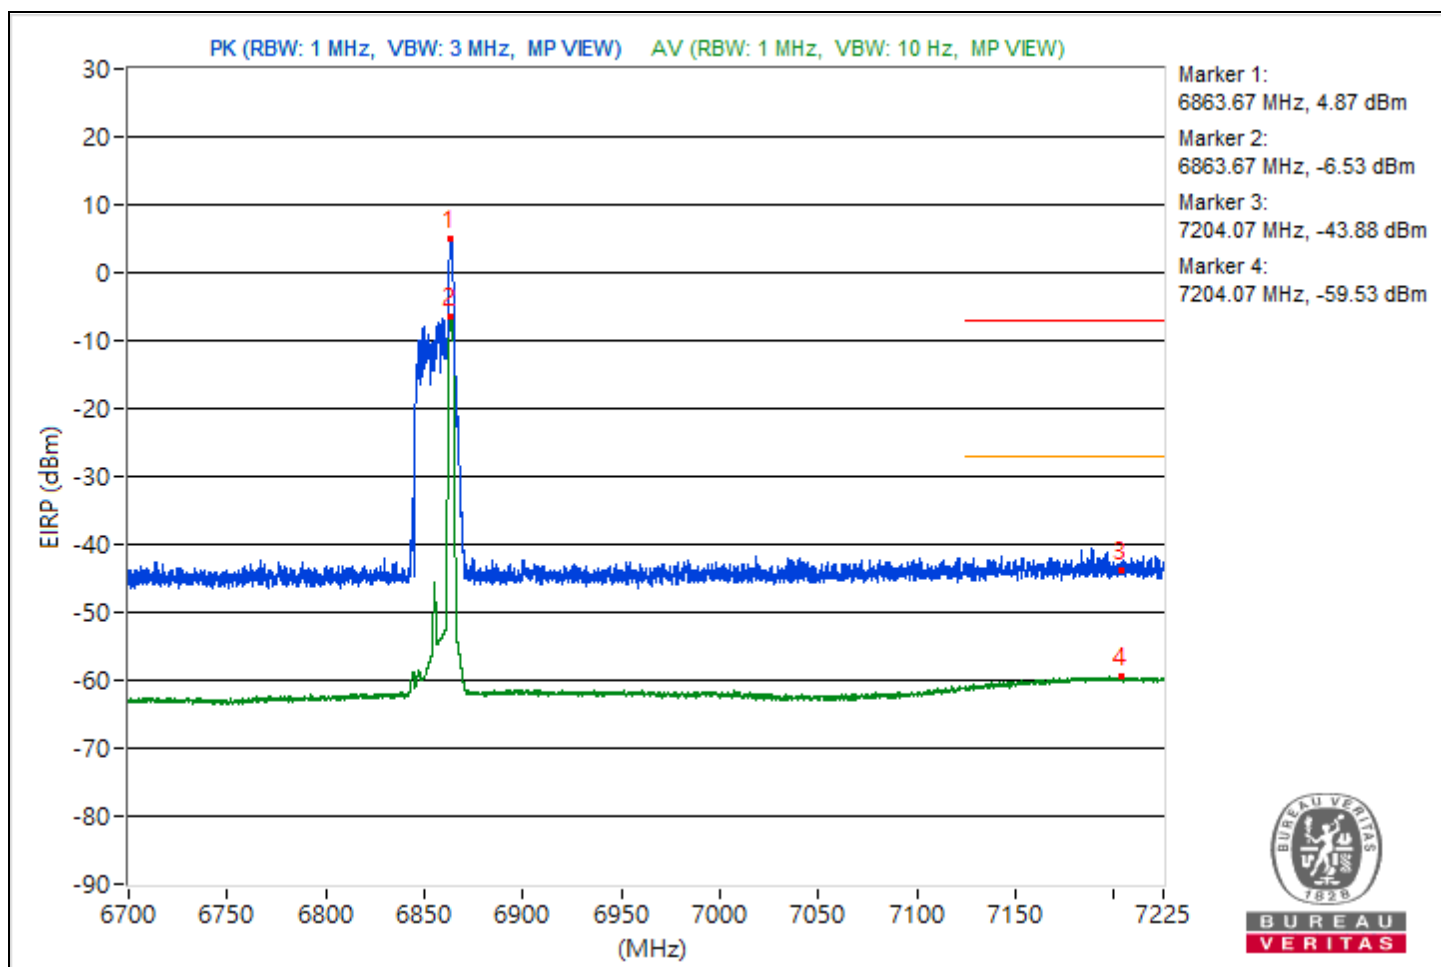


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5928.52	93.78 PK			-6.62	5.14	-1.48
2	*5928.52	84.19 AV			-16.21	5.14	-11.07
3	#5924.98	84.41 PK	88.26	-3.85	-15.99	5.14	-10.85
4	#5924.98	67.15 AV	68.26	-1.11	-33.25	5.14	-28.11

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

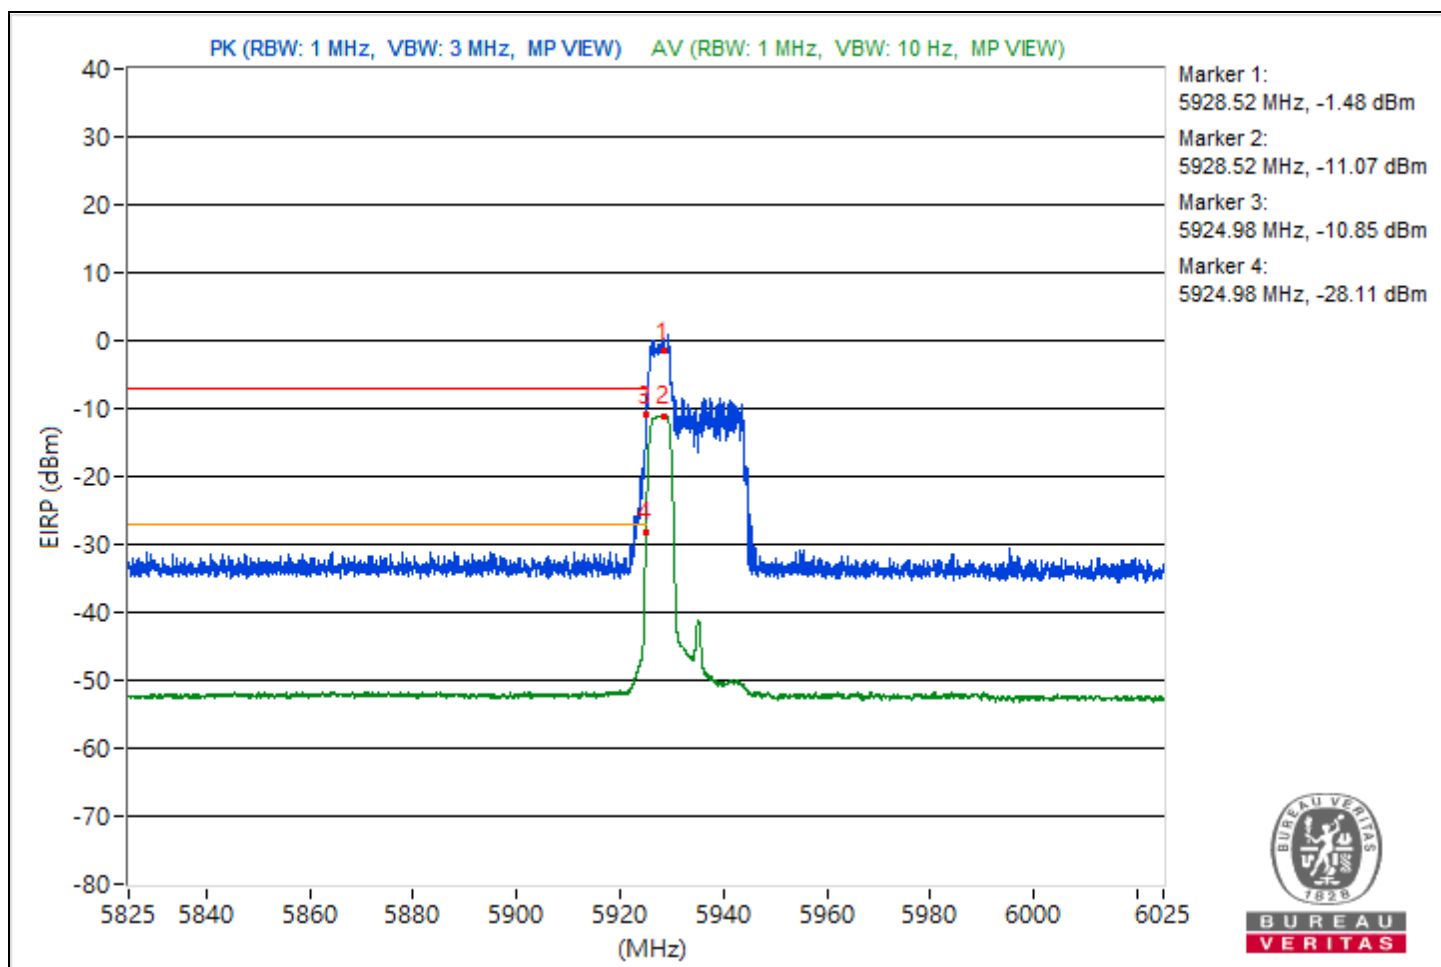


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5947.7	98.76 PK			-1.64	5.14	3.5
2	*5947.7	88.34 AV			-12.06	5.14	-6.92
3	#5917	62.5 PK	88.26	-25.76	-37.9	5.14	-32.76
4	#5917	43.9 AV	68.26	-24.36	-56.5	5.14	-51.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

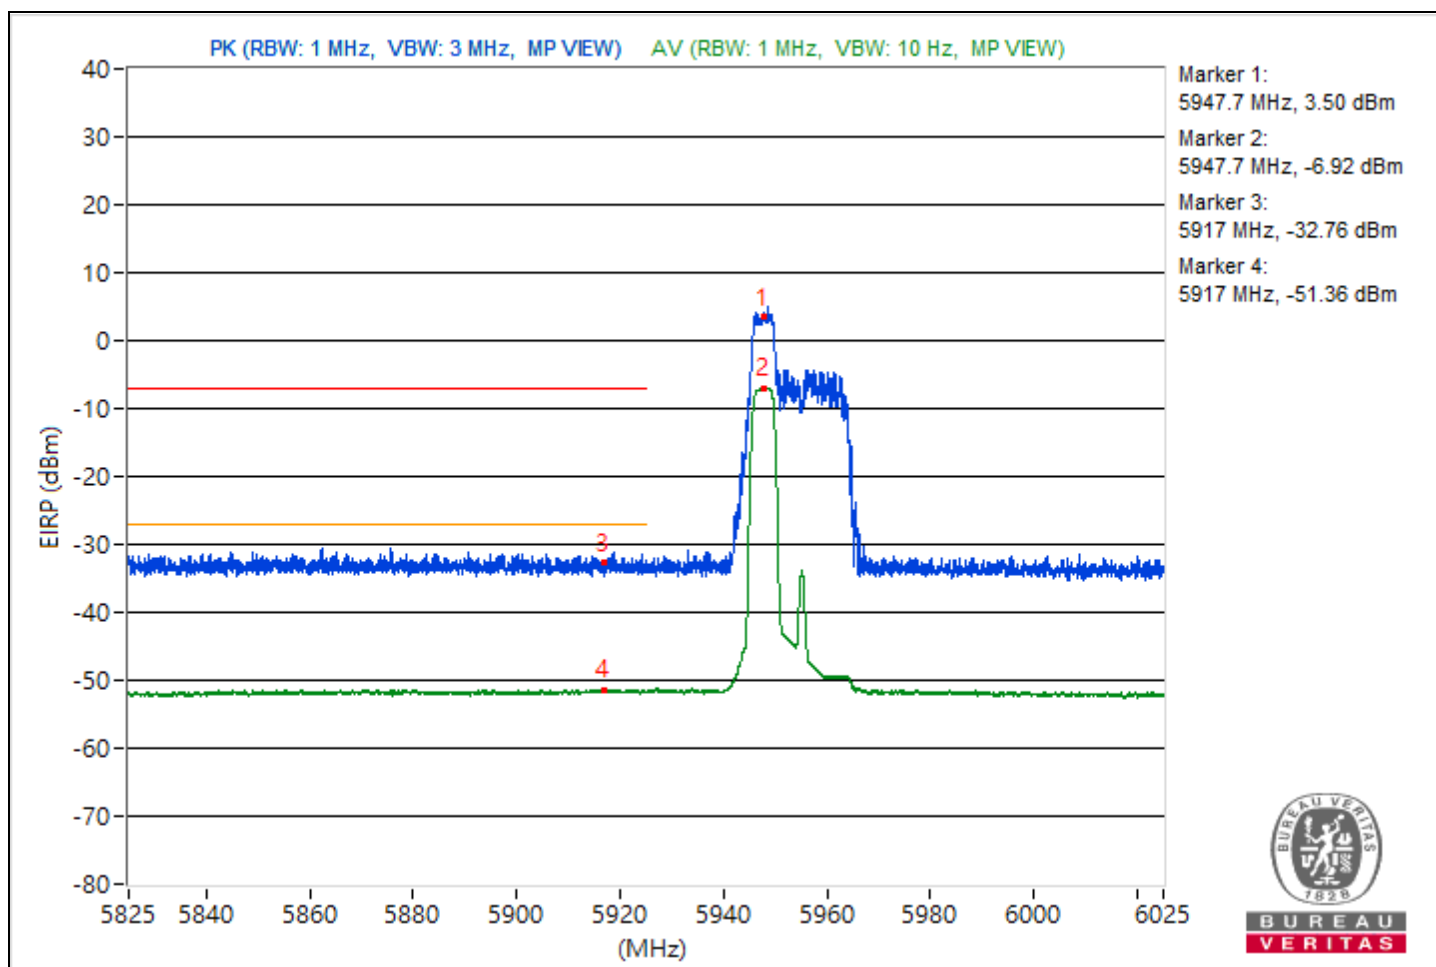


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6862.23	98.78 PK			-1.64	5.16	3.52
2	*6862.23	88.77 AV			-11.65	5.16	-6.49
3	#7205.12	52.19 PK	88.26	-36.07	-48.23	5.16	-43.07
4	#7205.12	35.93 AV	68.26	-32.33	-64.49	5.16	-59.33

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

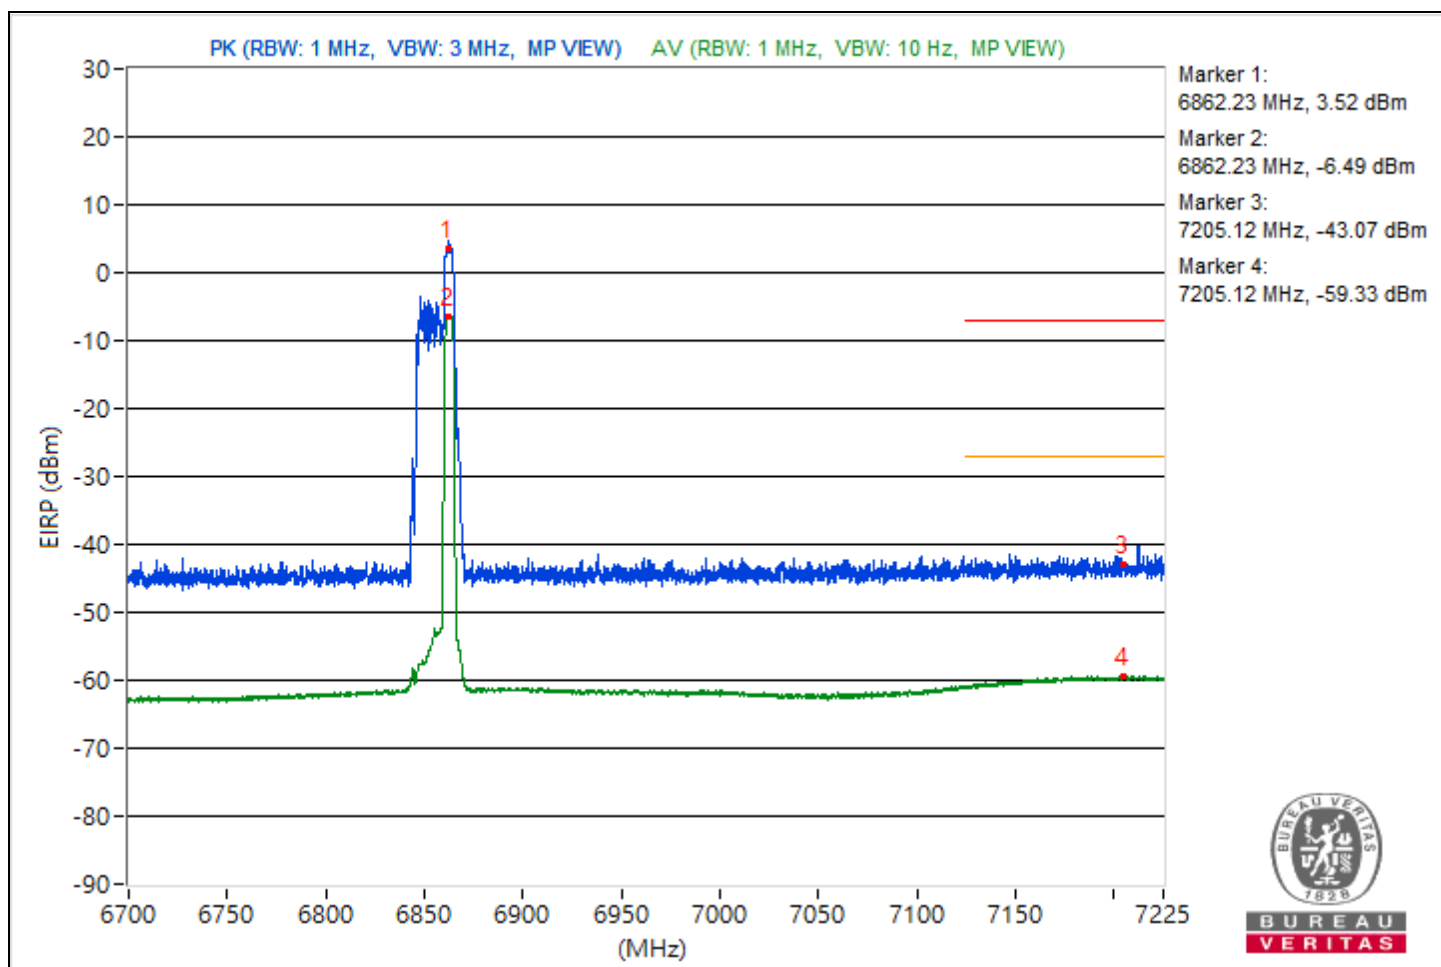


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5927.1	91.7 PK			-8.7	5.14	-3.56
2	*5927.1	82.37 AV			-18.03	5.14	-12.89
3	#5924.98	82.72 PK	88.26	-5.54	-17.68	5.14	-12.54
4	#5924.98	68.02 AV	68.26	-0.24	-32.38	5.14	-27.24

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

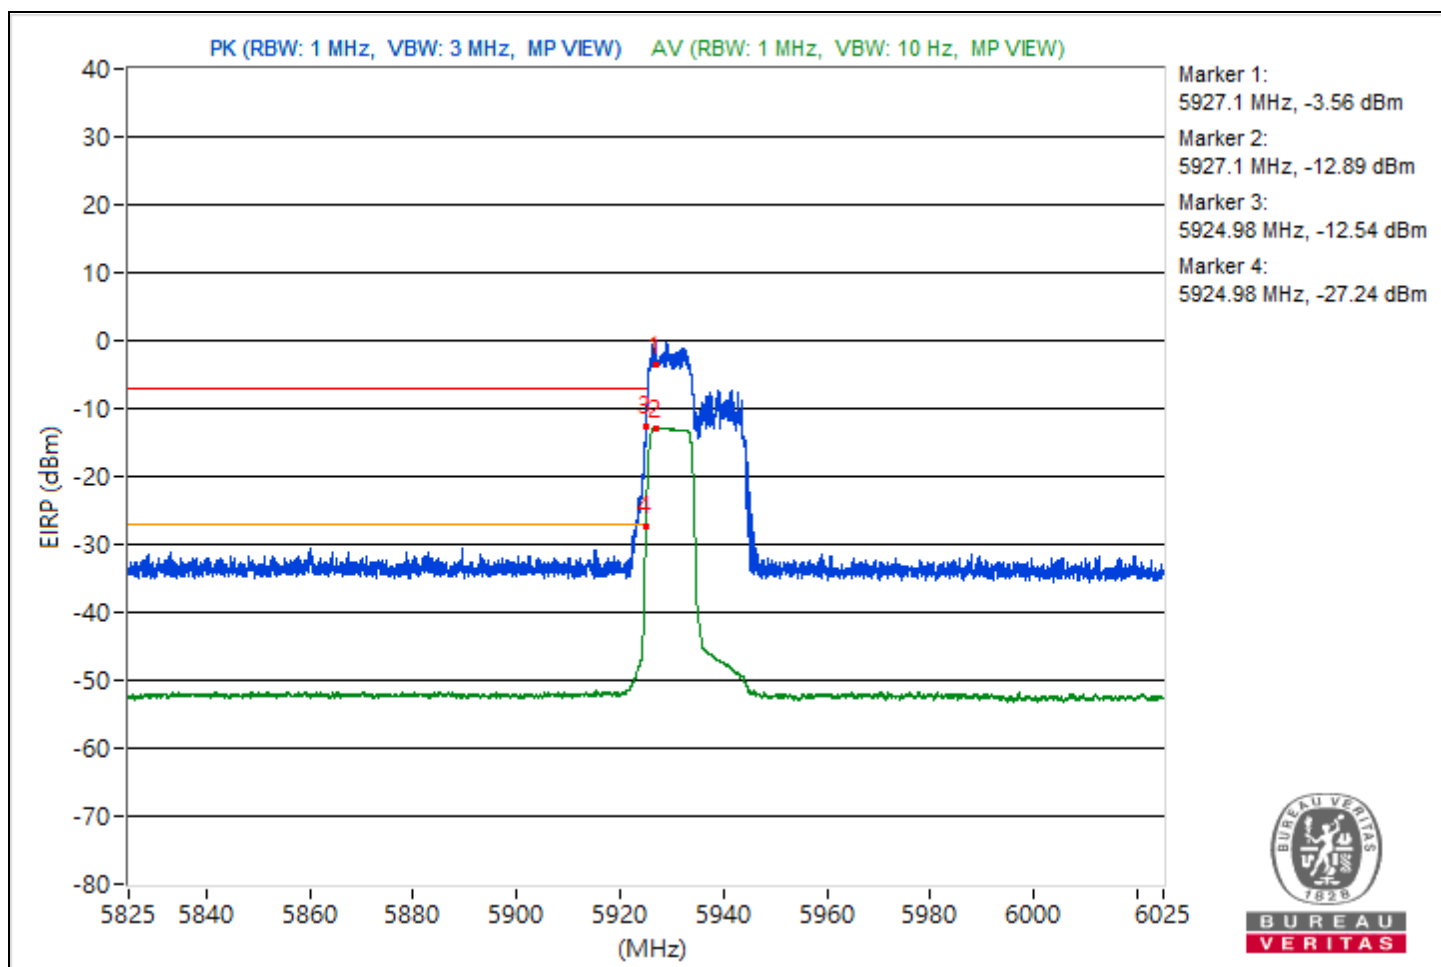


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5952.73	99.41 PK			-0.99	5.14	4.15
2	*5952.73	88.45 AV			-11.95	5.14	-6.81
3	#5920.48	63.19 PK	88.26	-25.07	-37.21	5.14	-32.07
4	#5920.48	44.19 AV	68.26	-24.07	-56.21	5.14	-51.07

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

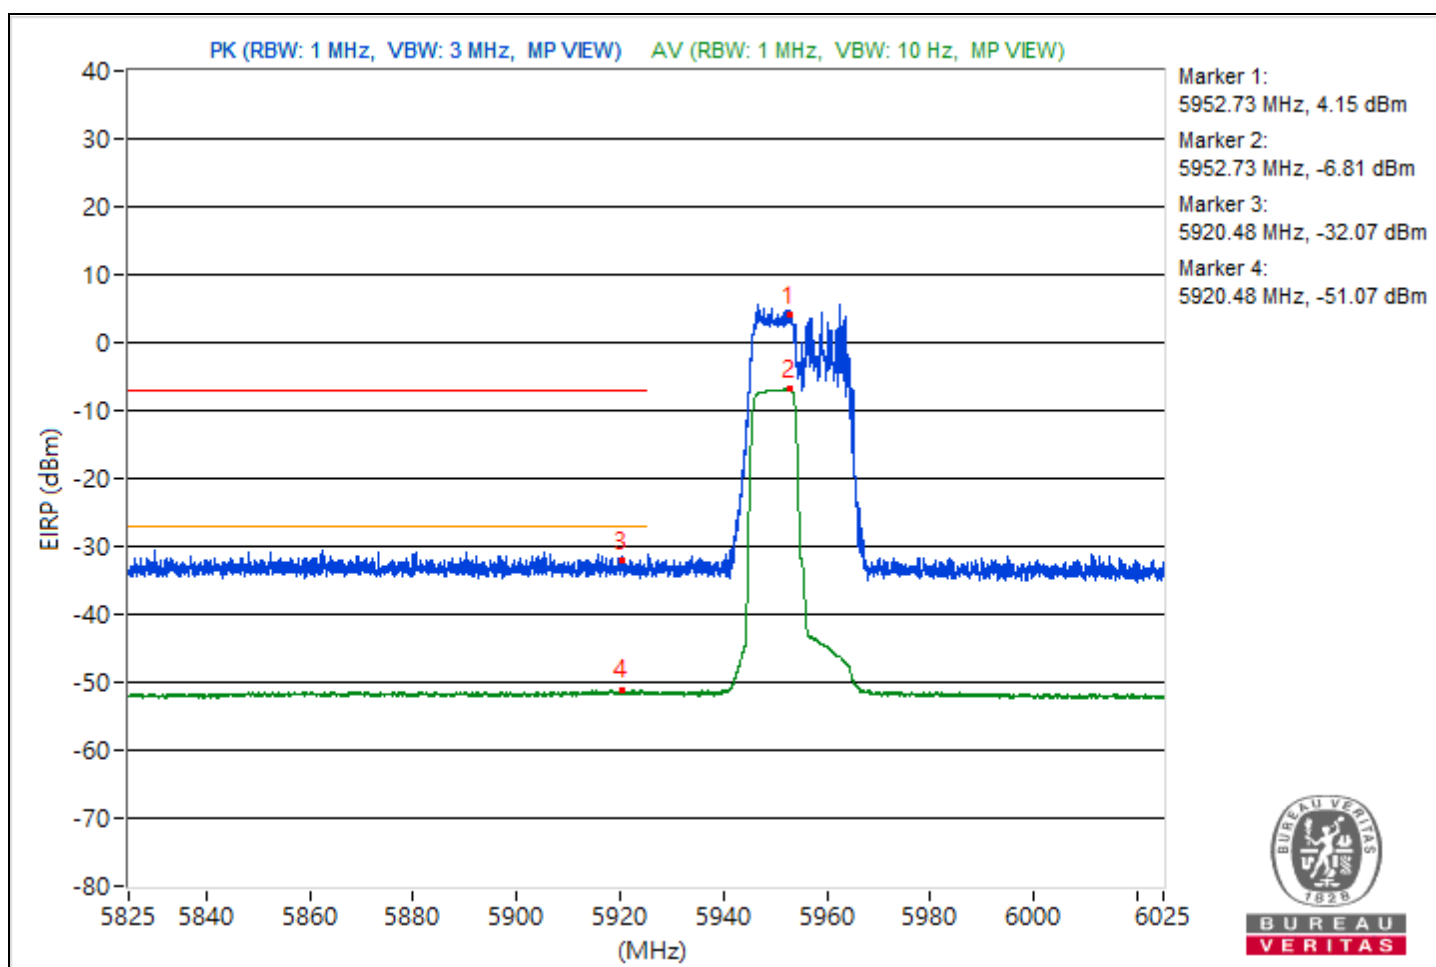


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6857.76	99.14 PK			-1.28	5.16	3.88
2	*6857.76	89.18 AV			-11.24	5.16	-6.08
3	#7214.04	50.37 PK	88.26	-37.89	-50.05	5.16	-44.89
4	#7214.04	35.79 AV	68.26	-32.47	-64.63	5.16	-59.47

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

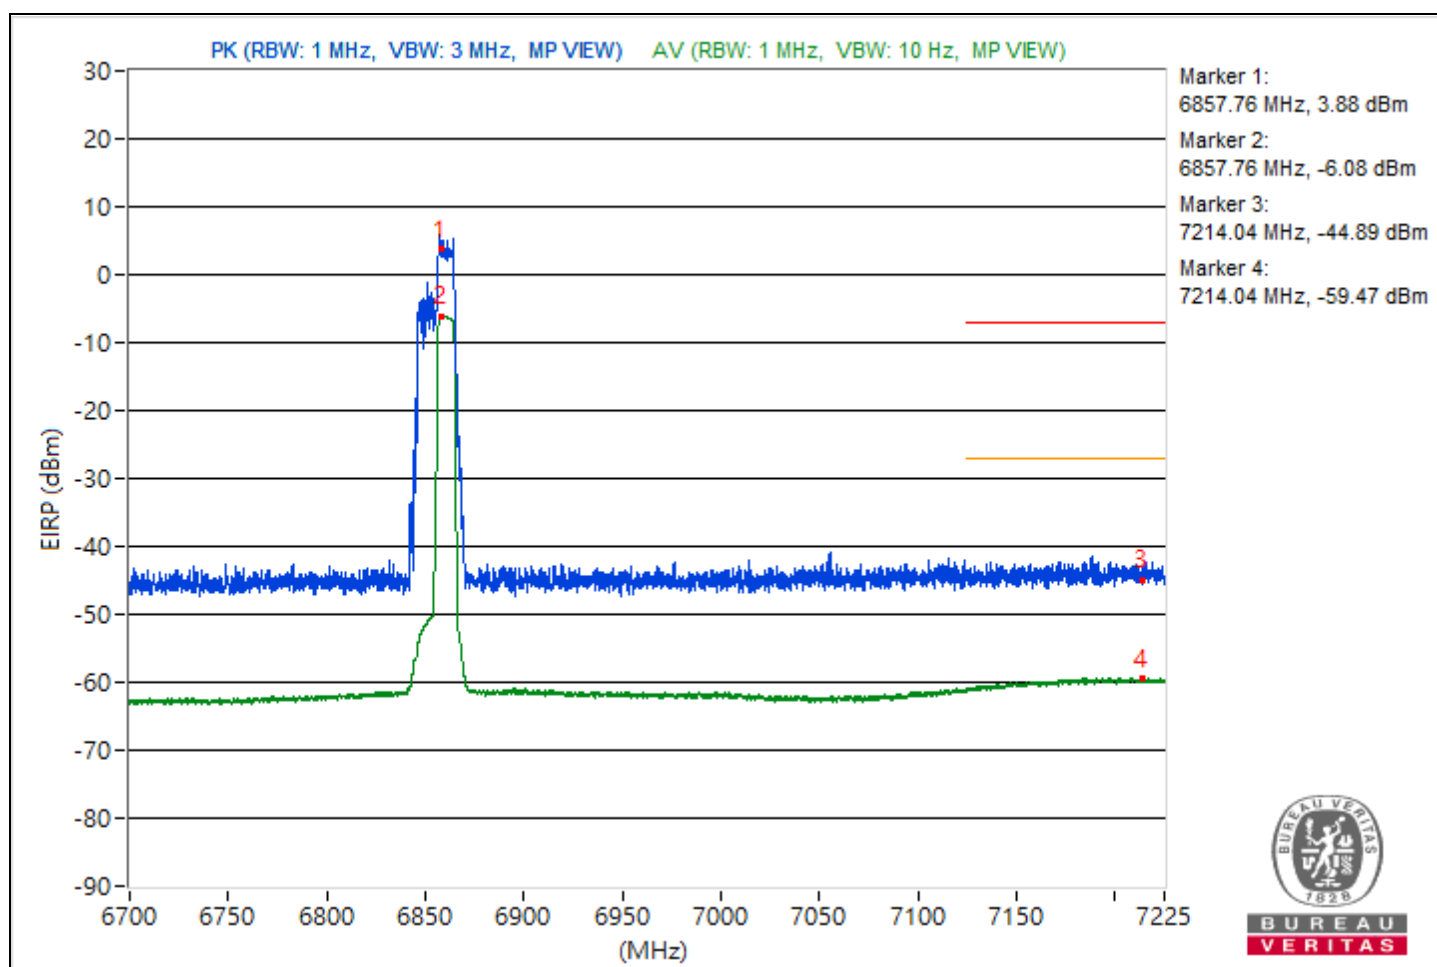


RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5982.75	97.02 PK			-3.38	5.14	1.76
2	*5982.75	86.78 AV			-13.62	5.14	-8.48
3	#5923.82	62.23 PK	88.26	-26.03	-38.17	5.14	-33.03
4	#5923.82	44.35 AV	68.26	-23.91	-56.05	5.14	-50.91

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

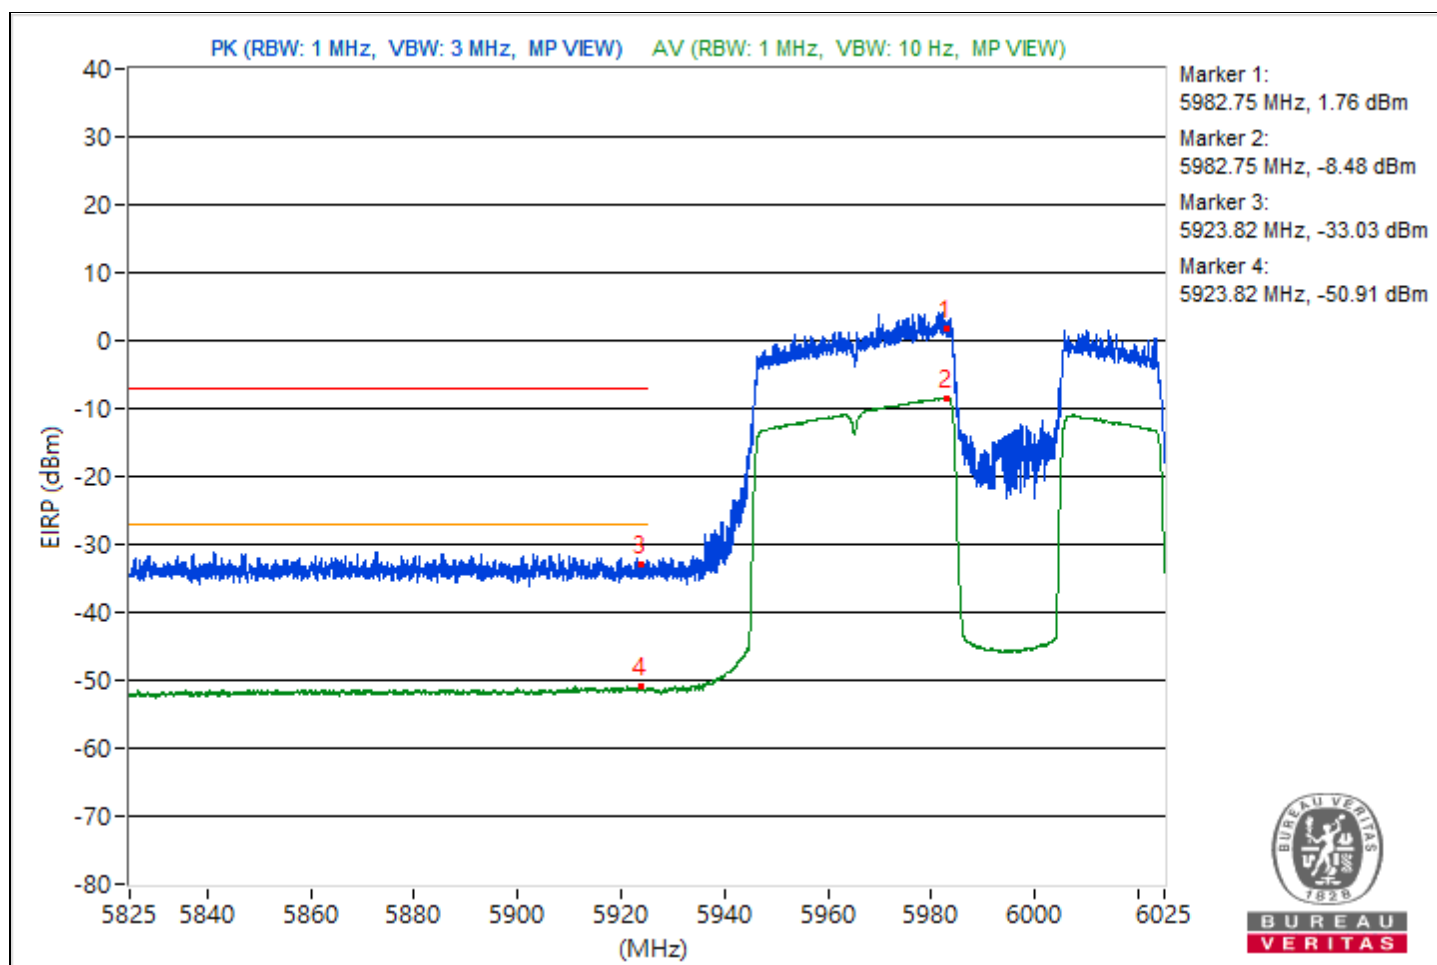


RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 167 : 6785 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6782.69	97.77 PK			-2.65	5.16	2.51
2	*6782.69	88.28 AV			-12.14	5.16	-6.98
3	#7203.08	52.14 PK	88.26	-36.12	-48.28	5.16	-43.12
4	#7203.08	36.35 AV	68.26	-31.91	-64.07	5.16	-58.91

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

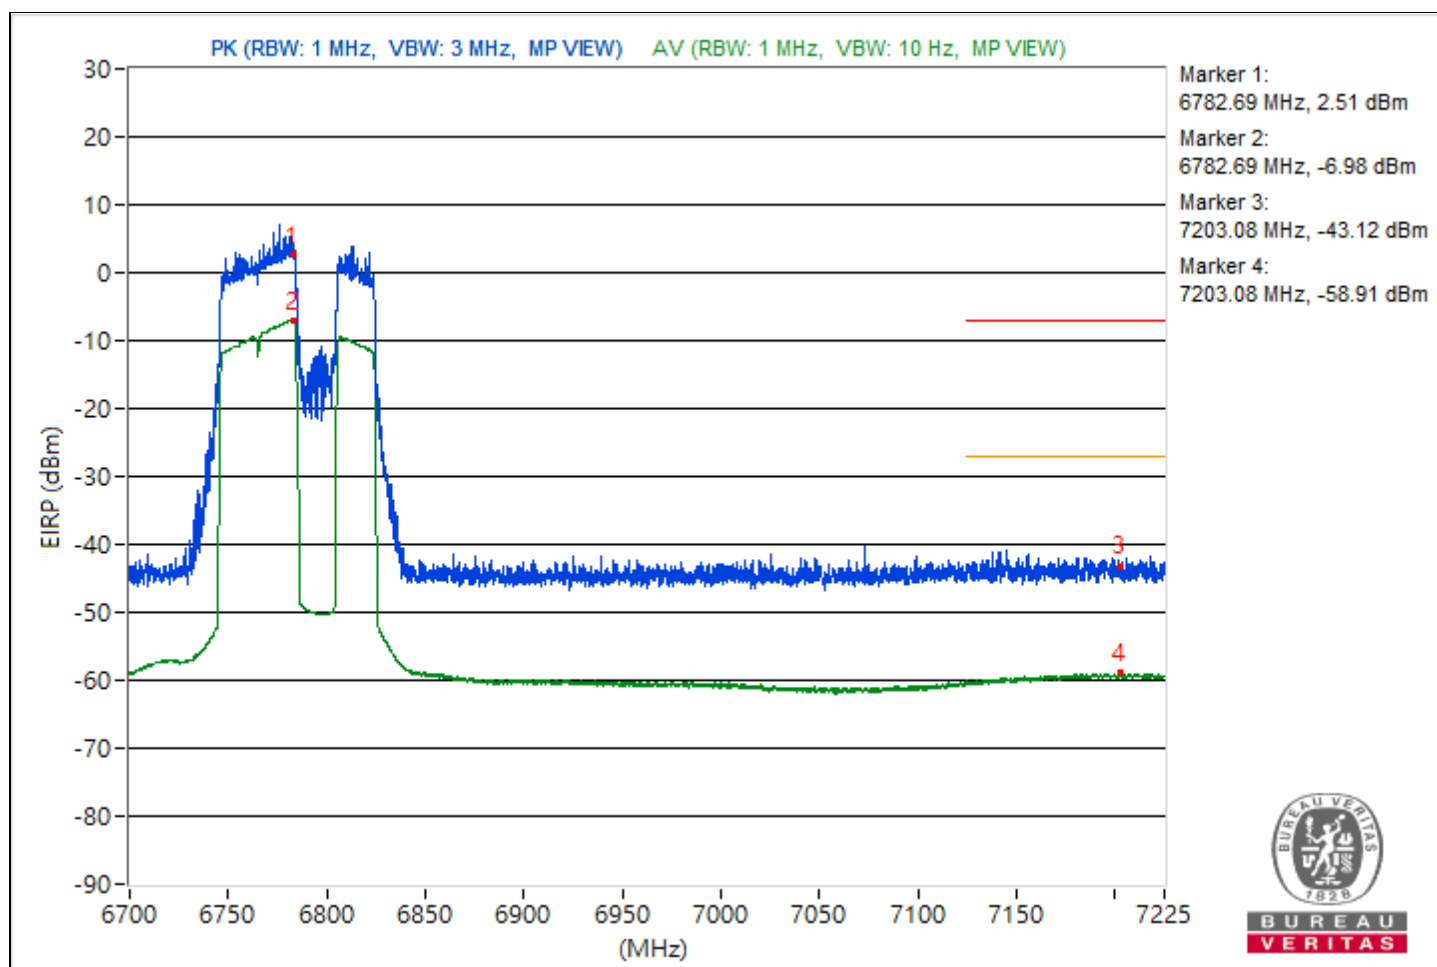


RF Mode	802.11be (EHT160) Punctured by 20 MHz	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.68	94.71 PK			-5.69	5.14	-0.55
2	*6022.68	85.15 AV			-15.25	5.14	-10.11
3	#5869.77	60.65 PK	88.26	-27.61	-39.75	5.14	-34.61
4	#5869.77	44.4 AV	68.26	-23.86	-56	5.14	-50.86

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

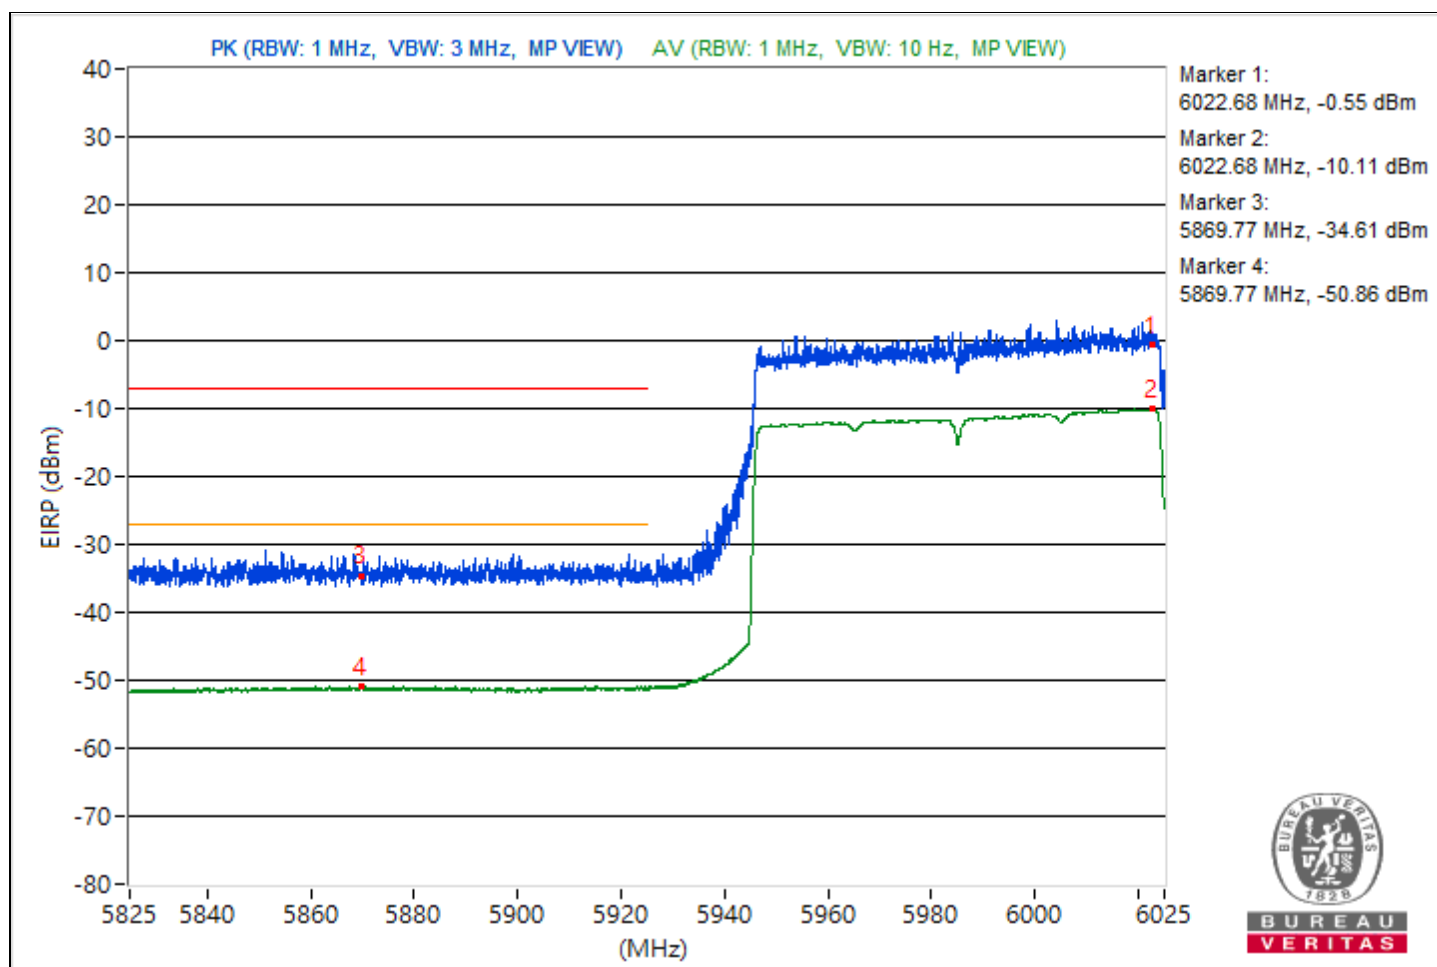


RF Mode	802.11be (EHT160) Punctured by 20 MHz	Channel	CH 143 : 6665 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6700.13	94.88 PK			-5.54	5.16	-0.38
2	*6700.13	83.22 AV			-17.2	5.16	-12.04
3	#7206.43	50.59 PK	88.26	-37.67	-49.83	5.16	-44.67
4	#7206.43	36.16 AV	68.26	-32.1	-64.26	5.16	-59.1

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

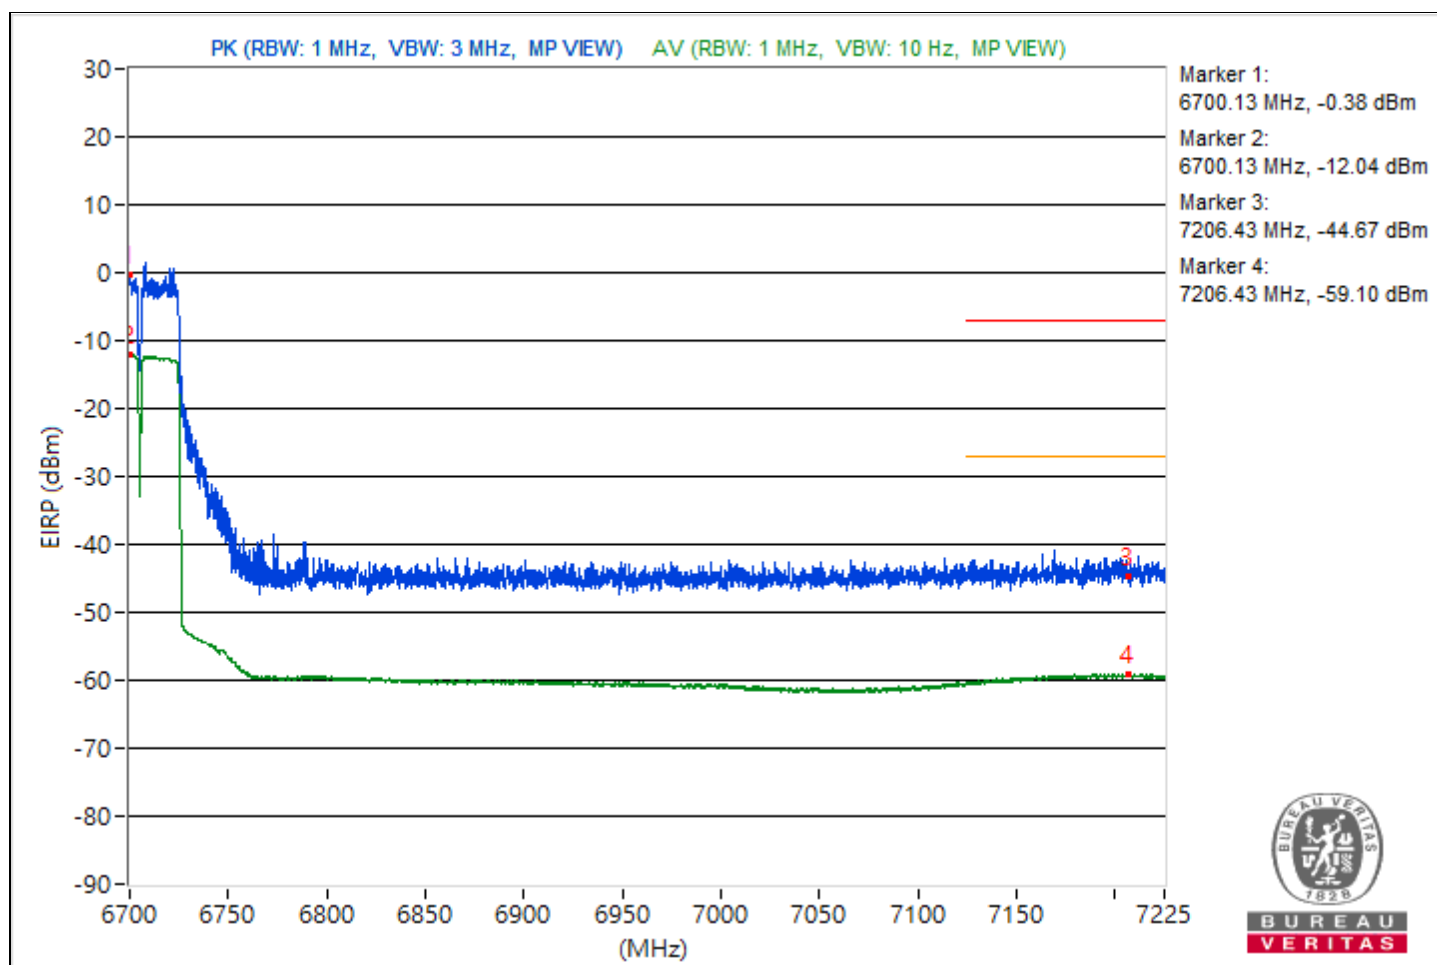


RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.65	94.14 PK			-6.26	5.14	-1.12
2	*6022.65	85.78 AV			-14.62	5.14	-9.48
3	#5914.73	61.78 PK	88.26	-26.48	-38.62	5.14	-33.48
4	#5914.73	44.16 AV	68.26	-24.1	-56.24	5.14	-51.1

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

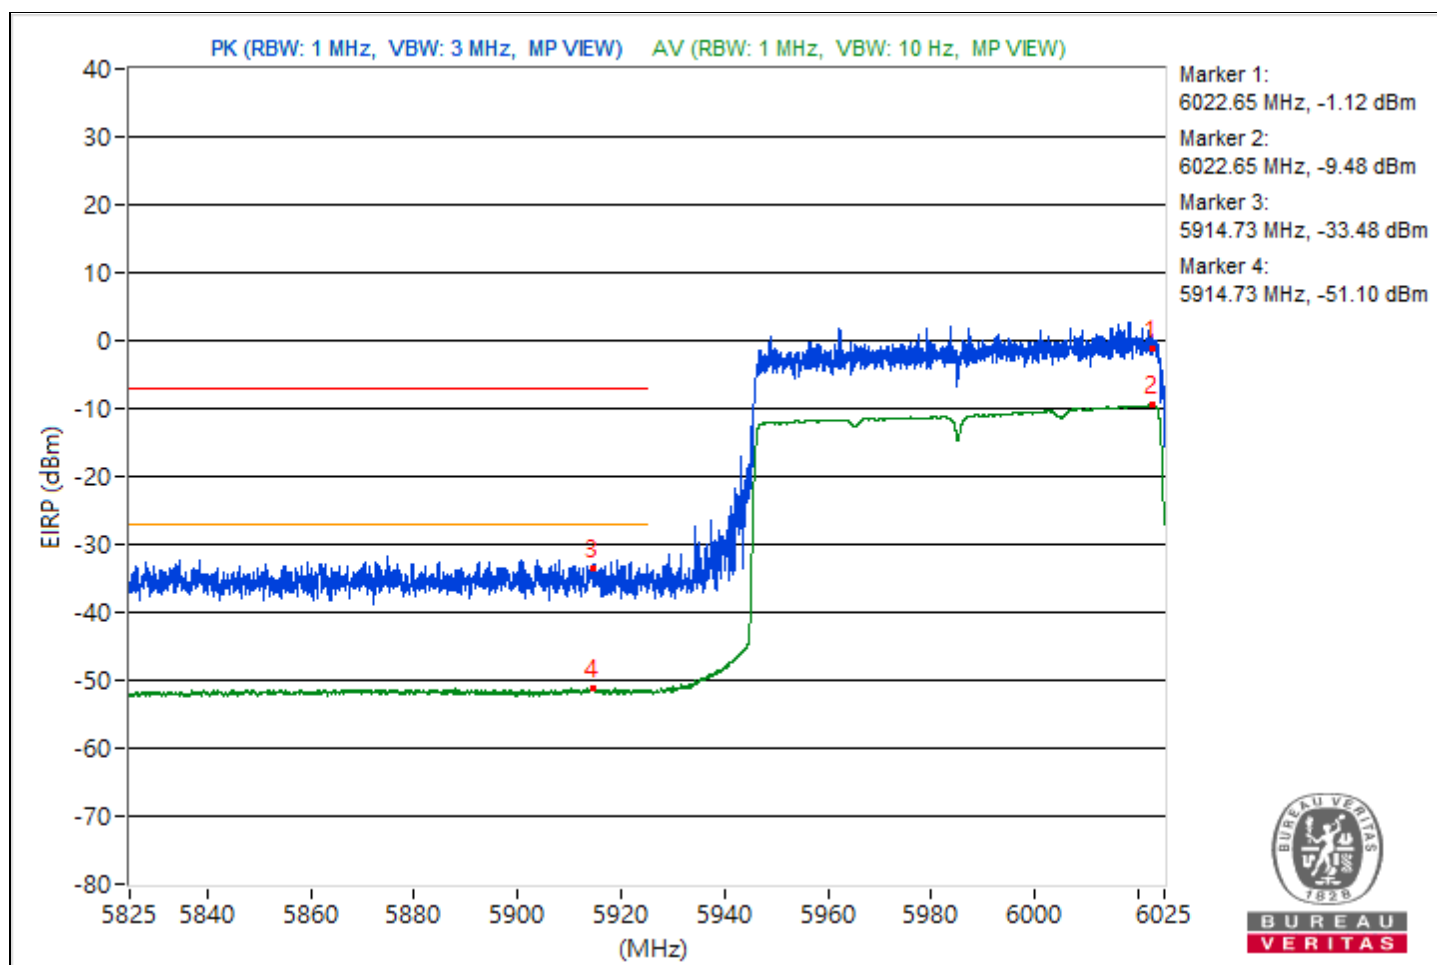


RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 143 : 6665 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6700.39	91.34 PK			-9.08	5.16	-3.92
2	*6700.39	83.81 AV			-16.61	5.16	-11.45
3	#7200.39	49.54 PK	88.26	-38.72	-50.88	5.16	-45.72
4	#7200.39	36.1 AV	68.26	-32.16	-64.32	5.16	-59.16

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

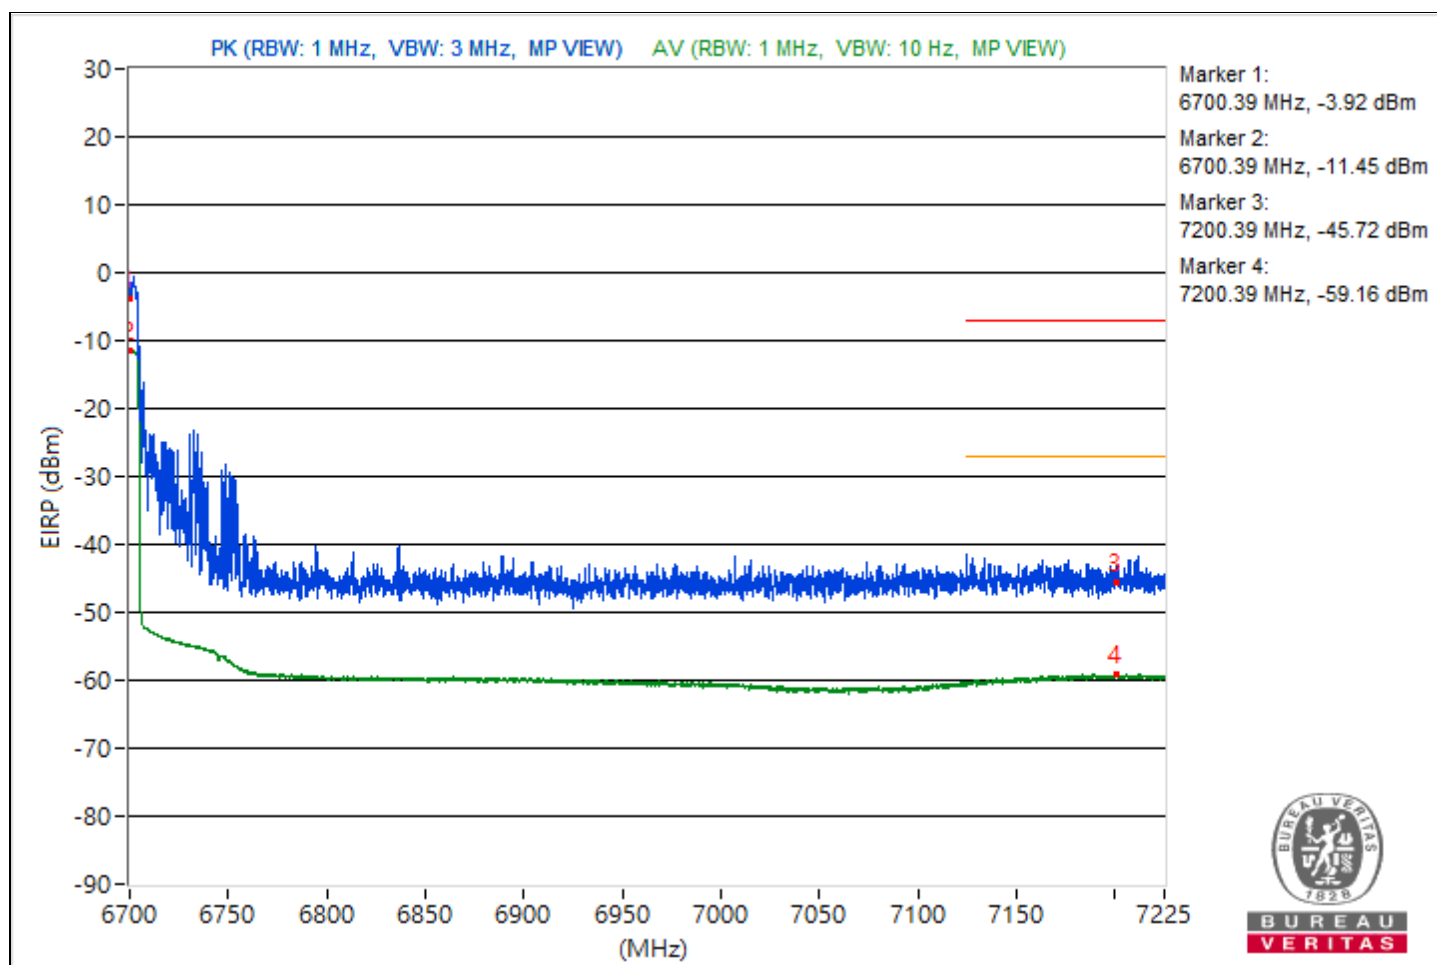


2TX


Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4904.13	55.81 PK	74	-18.19	-52.17	-49.5	8.17	-39.45
2	4904.13	35.06 AV	54	-18.94	-73.48	-69.97	8.17	-60.2
3	9312.36	53.14 PK	74	-20.86	-53.22	-53.38	8.17	-42.12
4	9312.36	35.14 AV	54	-18.86	-71.05	-71.57	8.17	-60.12
5	20469.5	56.21 PK	74	-17.79	-50.59	-49.89	8.17	-39.05
6	20469.5	36.57 AV	54	-17.43	-71.45	-68.71	8.17	-58.69
7	23996.6	59.46 PK	74	-14.54	-45.95	-48.34	8.17	-35.8
8	23996.6	37.69 AV	54	-16.31	-70.49	-67.51	8.17	-57.57
9	39163.91	42.83 PK	74	-31.17	-64.04	-63.21	8.17	-52.43
10	39163.91	32.32 AV	54	-21.68	-78.06	-72.09	8.17	-62.94

Note: Margin value = Emission Level - Limit value

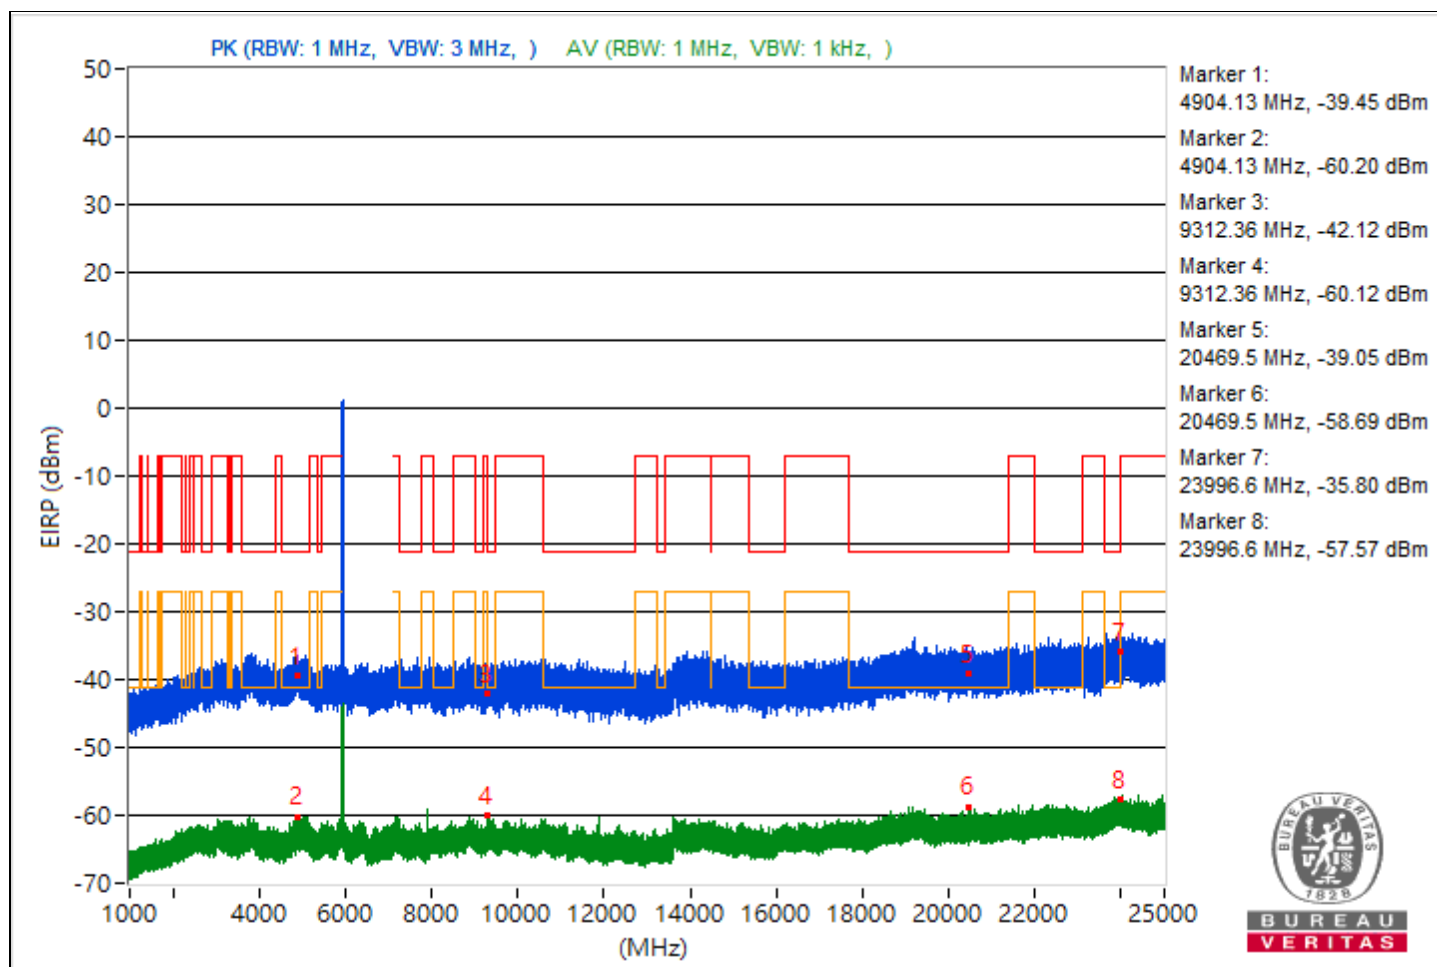


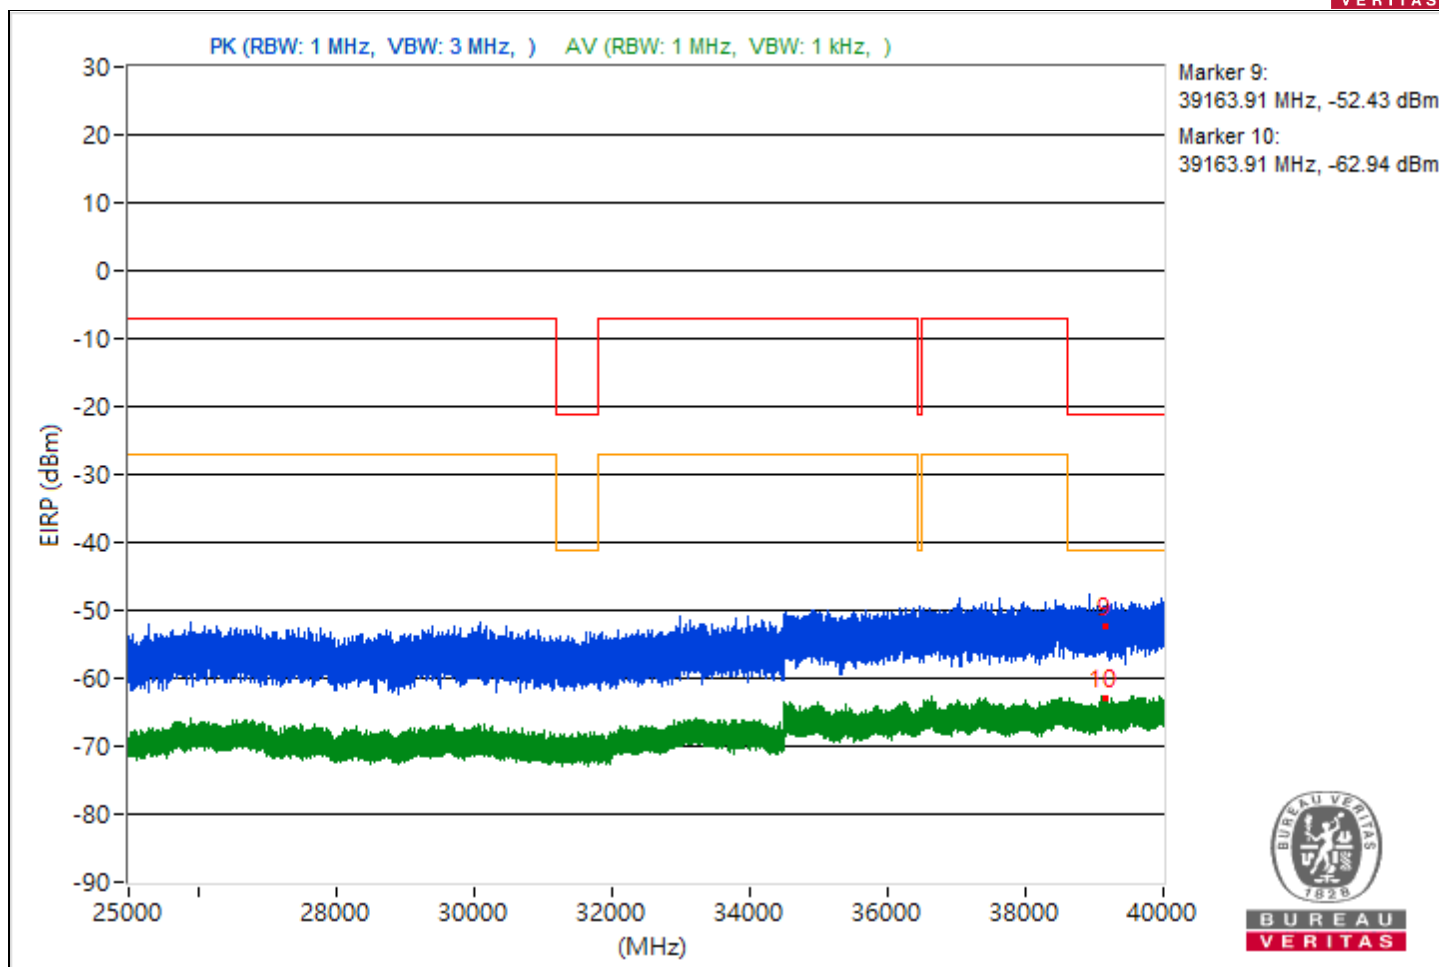


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4899.47	55.11 PK	74	-18.89	-50.2	-52.85	8.17	-40.15
2	4899.47	34.79 AV	54	-19.21	-73.81	-70.21	8.17	-60.47
3	11910.13	55 PK	74	-19	-50.58	-52.51	8.17	-40.26
4	11910.13	35.24 AV	54	-18.76	-75.02	-69.19	8.17	-60.02
5	20079.4	57.63 PK	74	-16.37	-49.05	-48.59	8.17	-37.63
6	20079.4	35.8 AV	54	-18.2	-73.32	-69	8.17	-59.46
7	23773.5	57.39 PK	74	-16.61	-48.41	-49.82	8.17	-37.87
8	23773.5	37.8 AV	54	-16.2	-70.83	-67.19	8.17	-57.46
9	39677.07	40.79 PK	74	-33.21	-66.7	-64.8	8.17	-54.47
10	39677.07	32.2 AV	54	-21.8	-77.46	-72.42	8.17	-63.06

Note: Margin value = Emission Level - Limit value

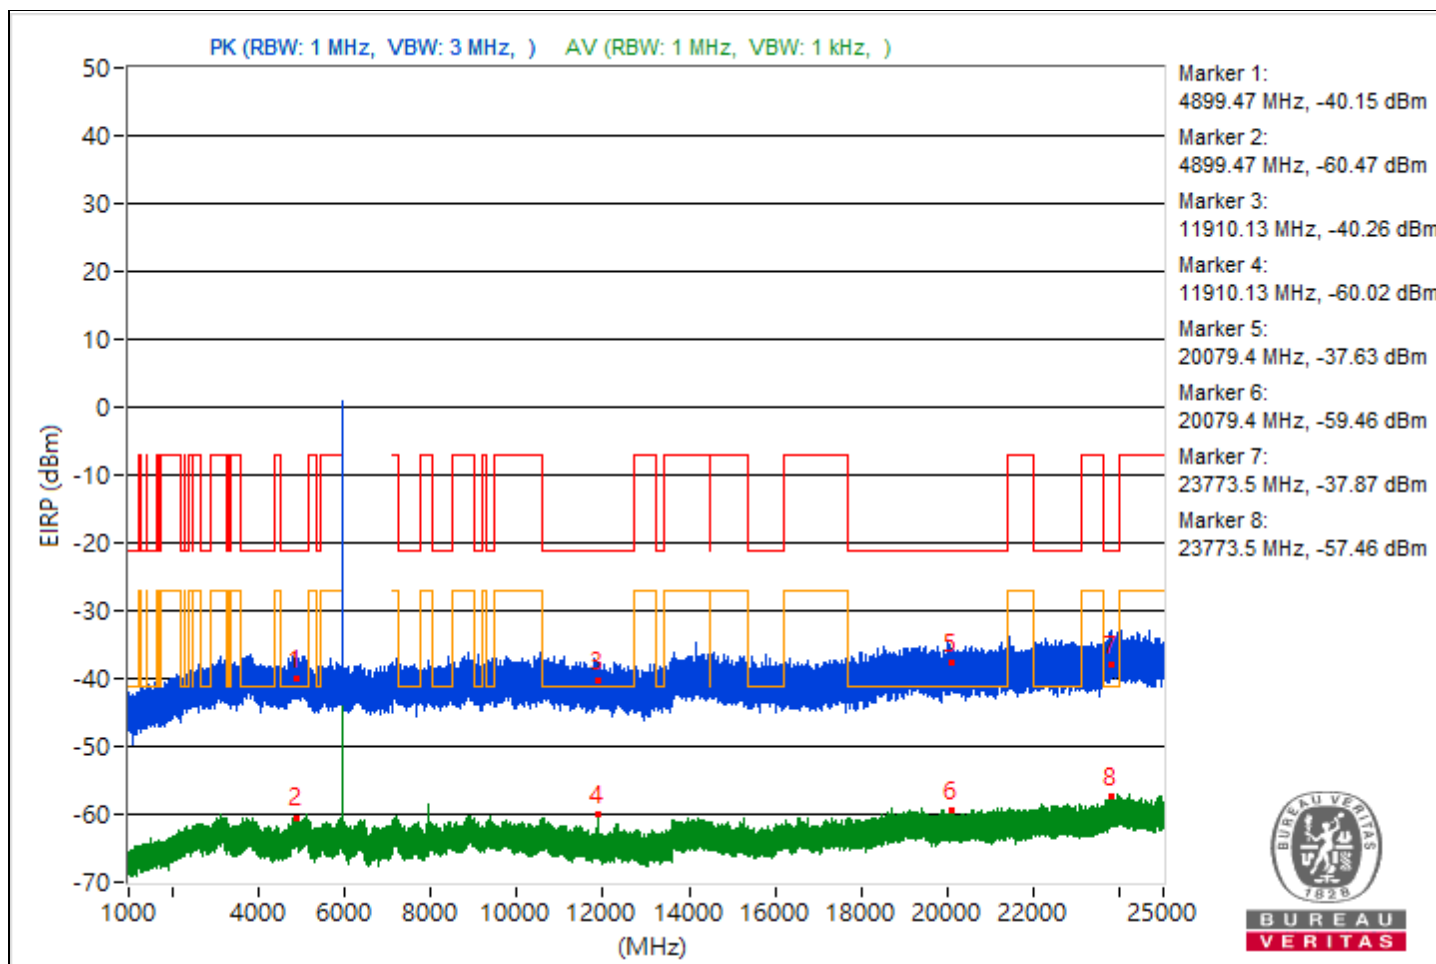


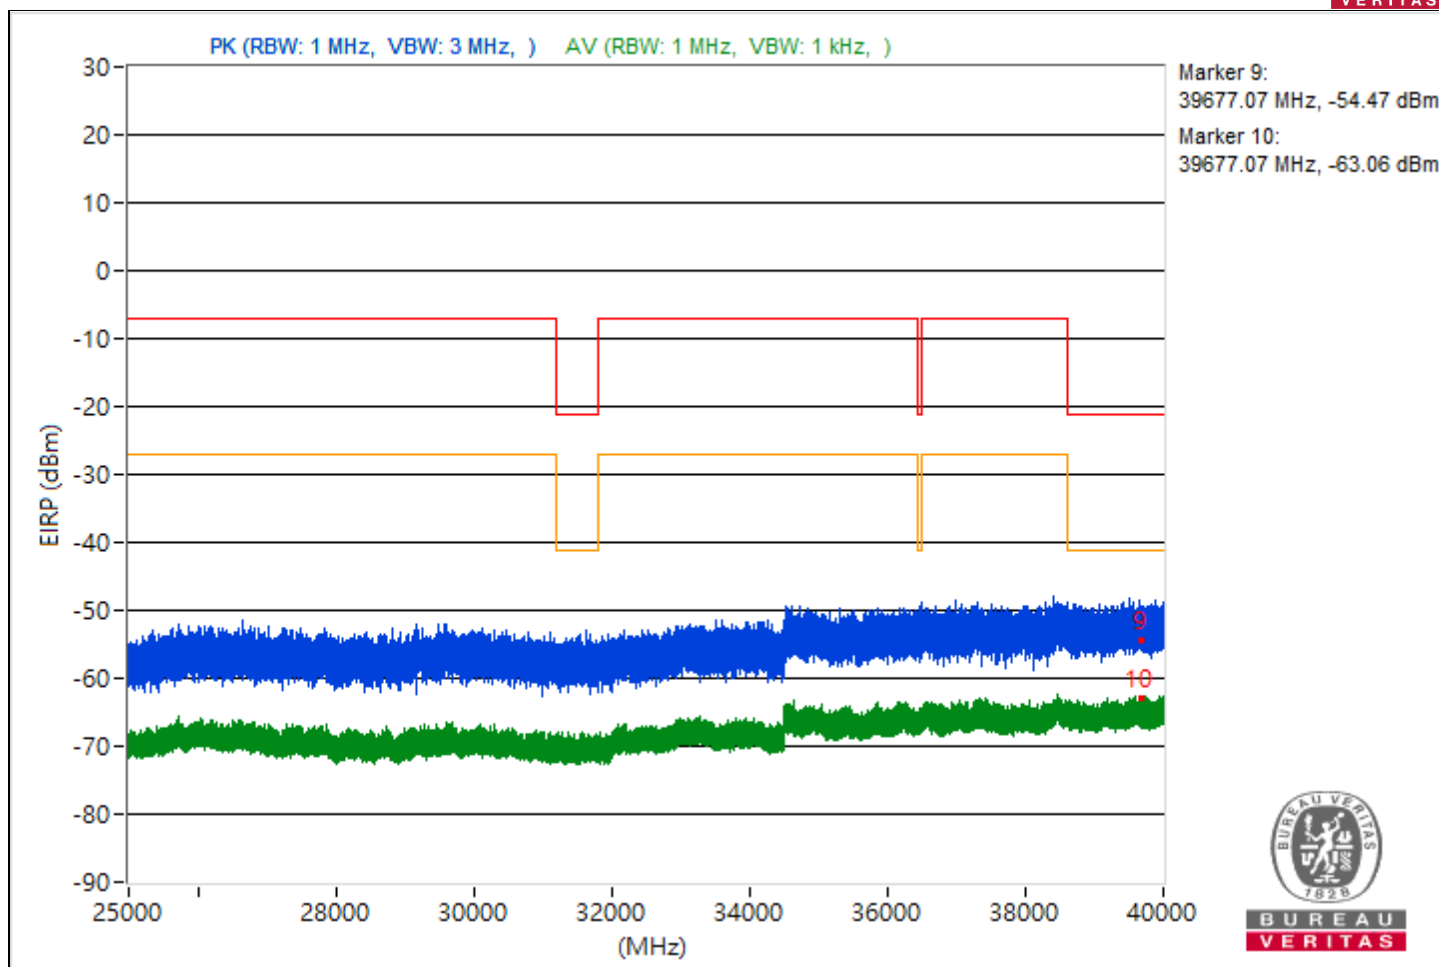


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4896.74	56.39 PK	74	-17.61	-49.88	-50.24	8.17	-38.87
2	4896.74	34.77 AV	54	-19.23	-74.12	-70.11	8.17	-60.49
3	12350.4	54.29 PK	74	-19.71	-51.47	-52.97	8.17	-40.97
4	12350.4	34.32 AV	54	-19.68	-76.49	-69.98	8.17	-60.94
5	19238.5	57.65 PK	74	-16.35	-48.81	-48.77	8.17	-37.61
6	19238.5	35.54 AV	54	-18.46	-69.48	-73.03	8.17	-59.72
7	23935.7	57.41 PK	74	-16.59	-49.89	-48.32	8.17	-37.85
8	23935.7	37.55 AV	54	-16.45	-71.68	-67.2	8.17	-57.71
9	39534.31	44.42 PK	74	-29.58	-64.58	-60.42	8.17	-50.84
10	39534.31	32.89 AV	54	-21.11	-72.89	-74.33	8.17	-62.37

Note: Margin value = Emission Level - Limit value

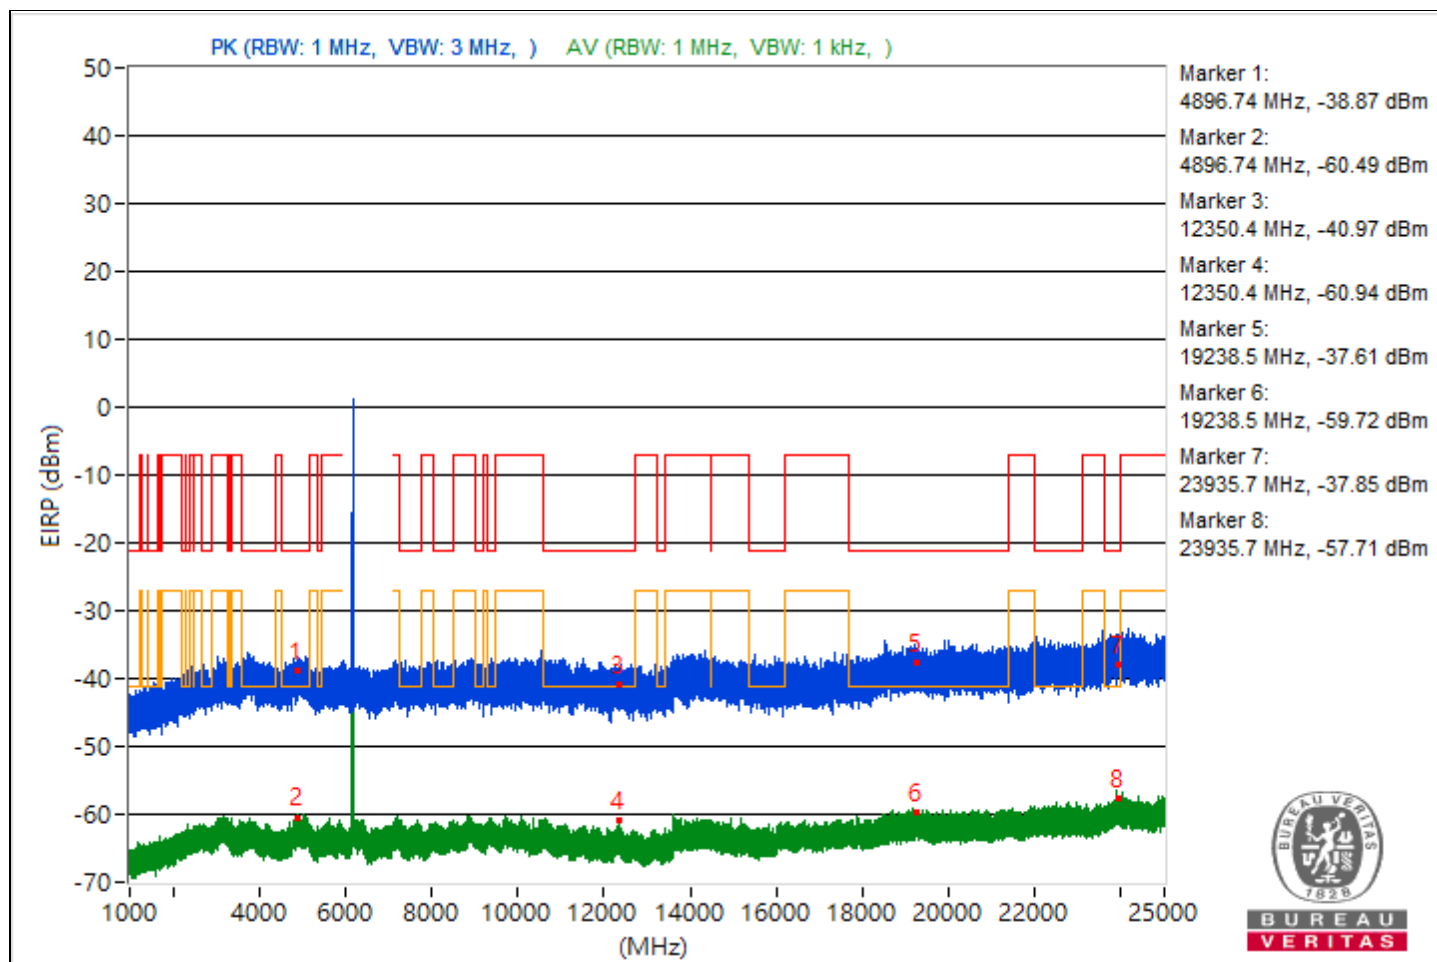


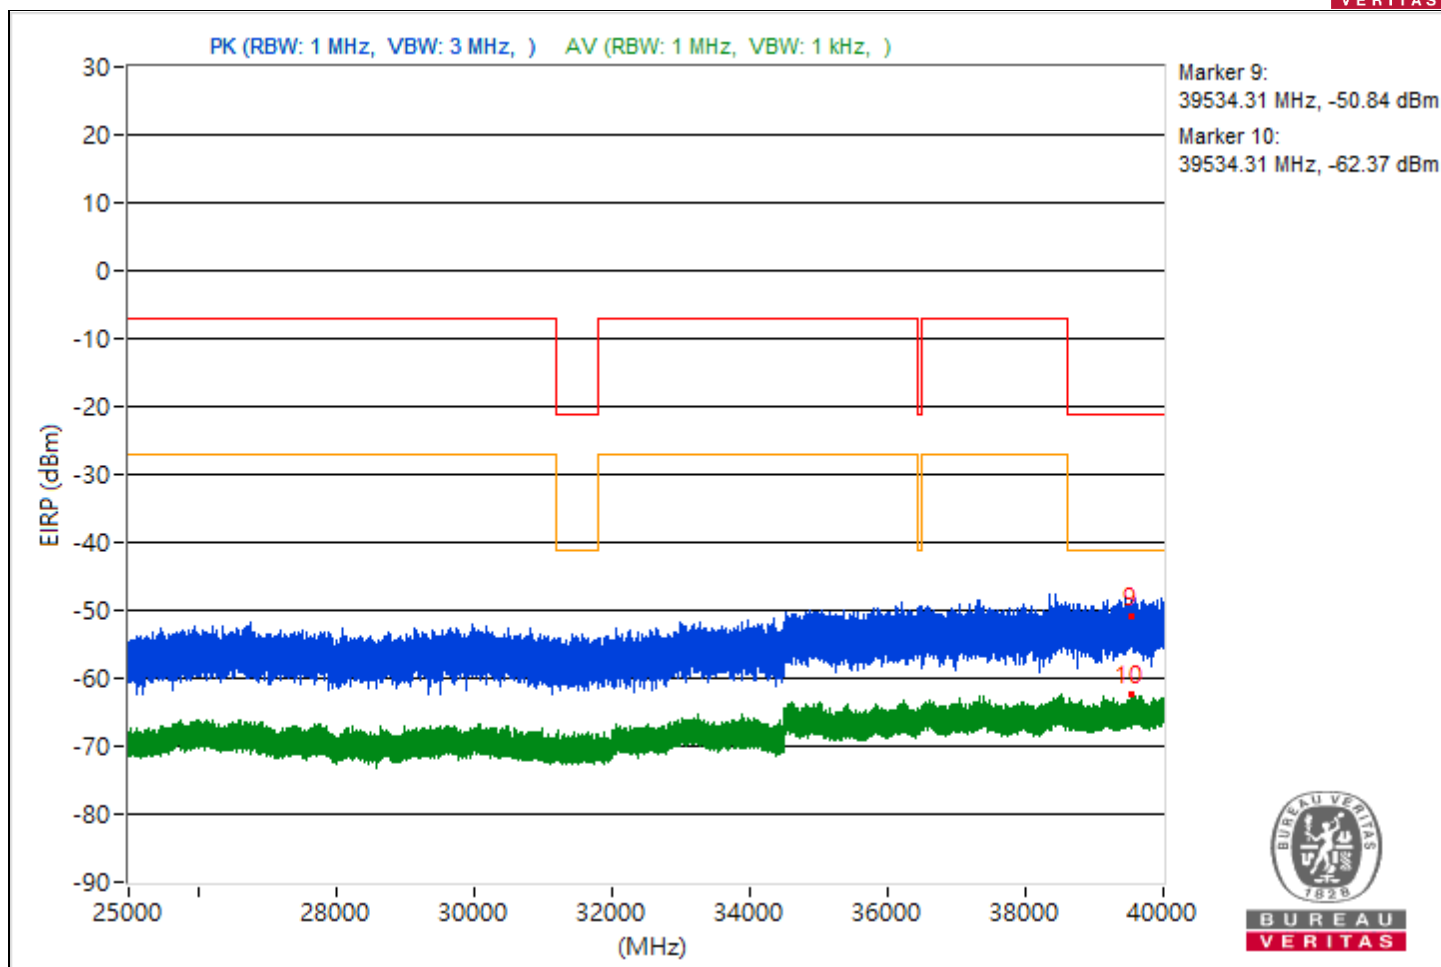


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4896.04	53.71 PK	74	-20.29	-52.89	-52.58	8.17	-41.55
2	4896.04	34.96 AV	54	-19.04	-75	-69.56	8.17	-60.3
3	14476.44	57.32 PK	74	-16.68	-48.45	-49.92	8.17	-37.94
4	14476.44	35.05 AV	54	-18.95	-74.6	-69.56	8.17	-60.21
5	19250.1	54.65 PK	74	-19.35	-53.5	-50.57	8.17	-40.61
6	19250.1	36.81 AV	54	-17.19	-71.25	-68.45	8.17	-58.45
7	23986.5	58.98 PK	74	-15.02	-48.79	-46.45	8.17	-36.28
8	23986.5	38.47 AV	54	-15.53	-68.54	-67.46	8.17	-56.79
9	39572.27	44.11 PK	74	-29.89	-62.72	-61.97	8.17	-51.15
10	39572.27	32.62 AV	54	-21.38	-72.71	-75.31	8.17	-62.64

Note: Margin value = Emission Level - Limit value

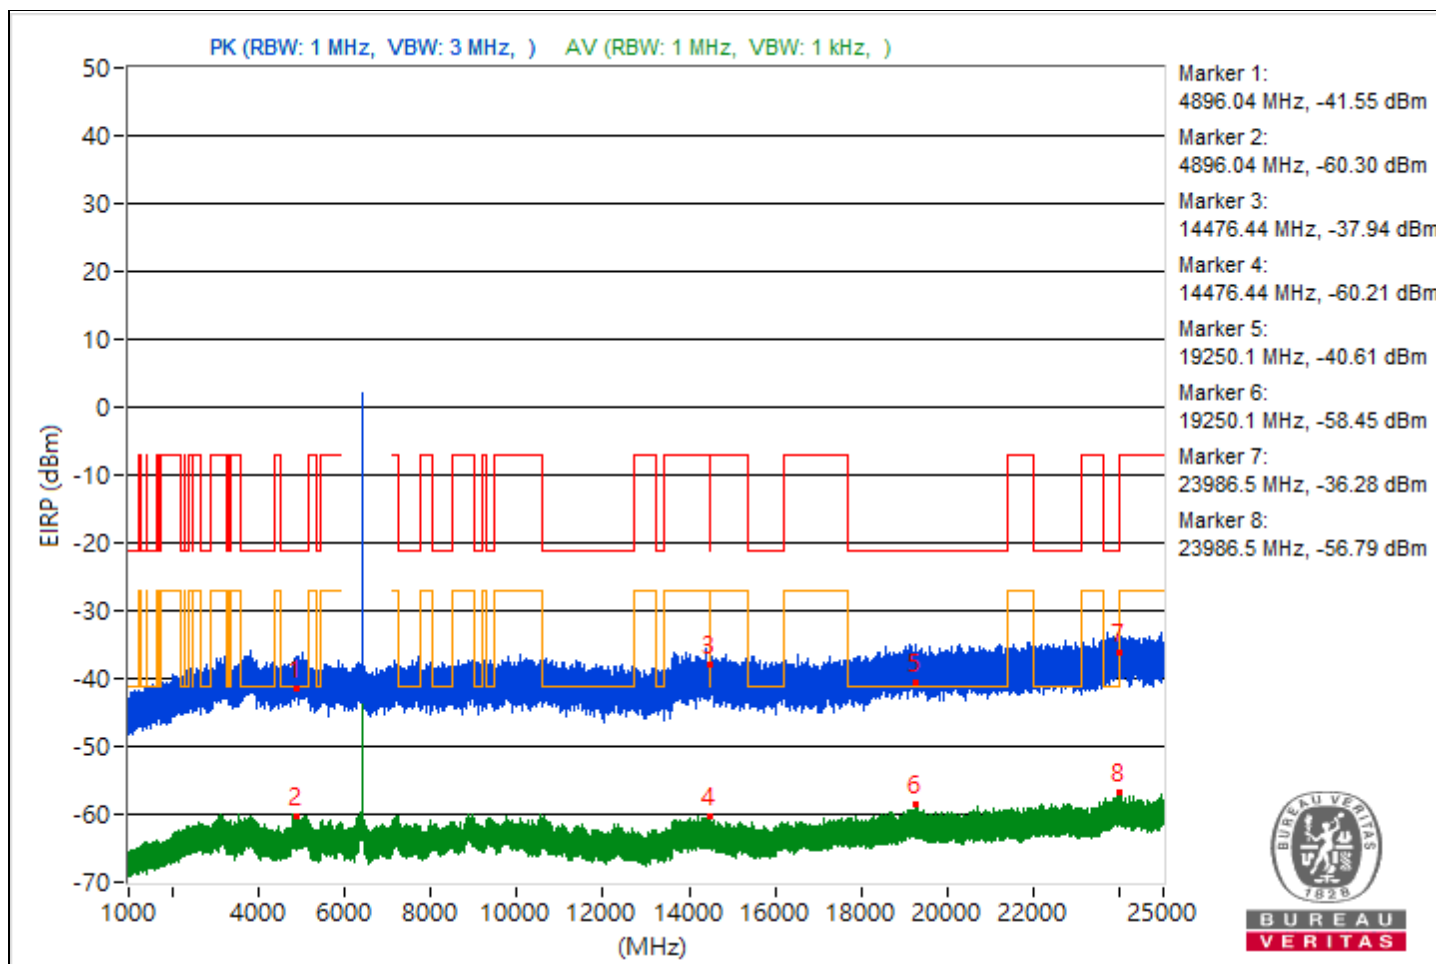


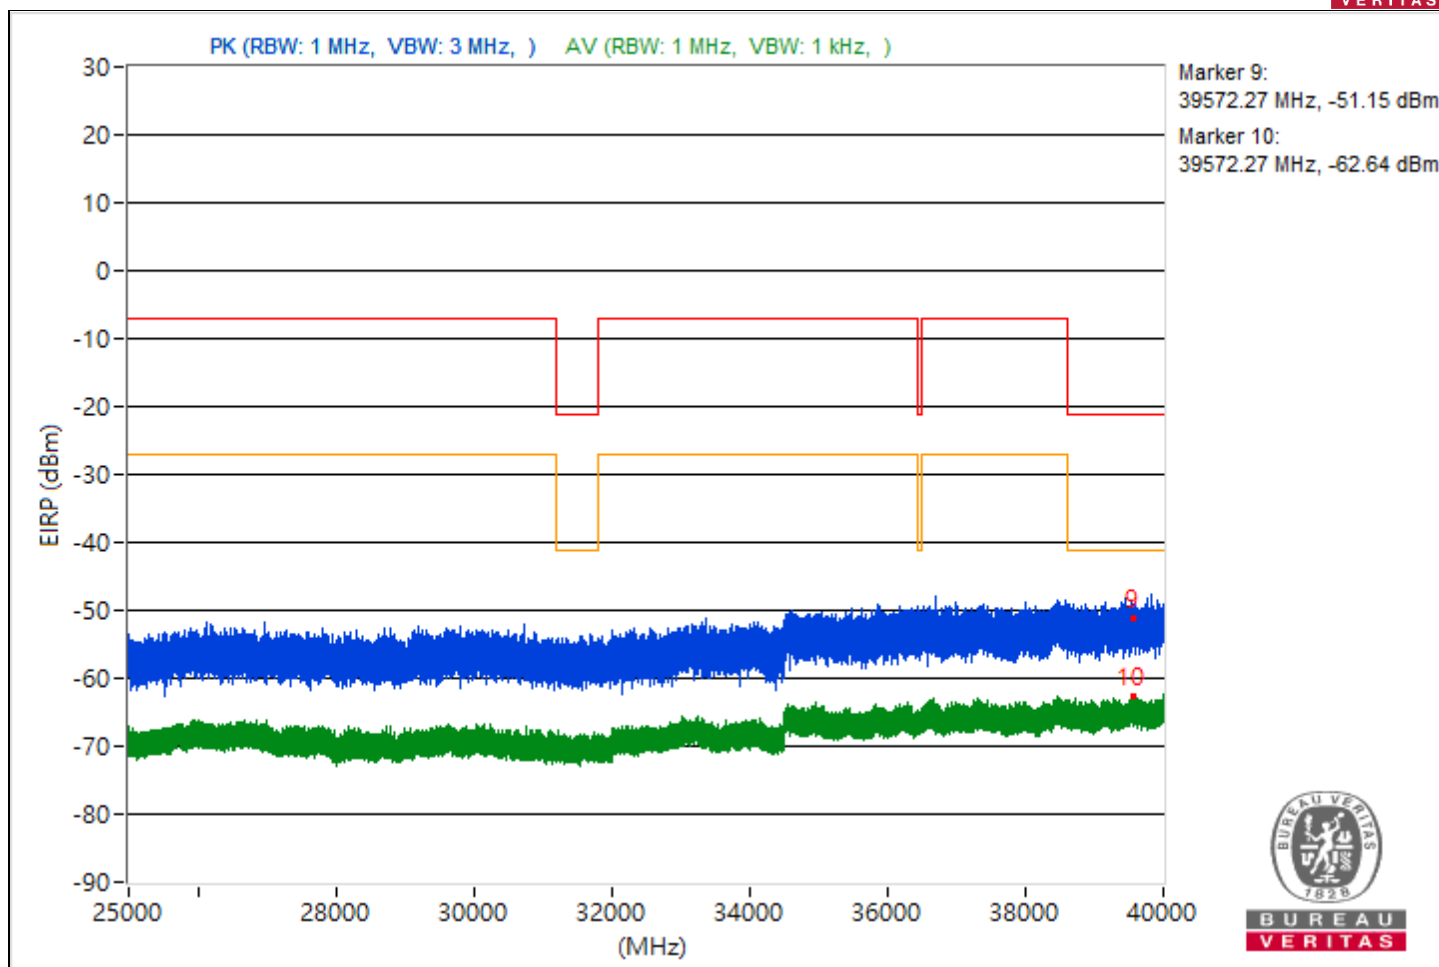


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4911.06	56.86 PK	74	-17.14	-50.23	-49.02	8.17	-38.4
2	4911.06	35.06 AV	54	-18.94	-69.43	-74.99	8.17	-60.2
3	10664	54.75 PK	74	-19.25	-51.11	-52.36	8.17	-40.51
4	10664	33.86 AV	54	-20.14	-75.58	-70.82	8.17	-61.4
5	19116.6	56.98 PK	74	-17.02	-50.33	-48.74	8.17	-38.28
6	19116.6	36.32 AV	54	-17.68	-72.36	-68.65	8.17	-58.94
7	23954.4	54.52 PK	74	-19.48	-53.74	-50.65	8.17	-40.74
8	23954.4	37.35 AV	54	-16.65	-72.02	-67.36	8.17	-57.91
9	39582.49	42.74 PK	74	-31.26	-65.3	-62.53	8.17	-52.52
10	39582.49	32.29 AV	54	-21.71	-76.34	-72.7	8.17	-62.97

Note: Margin value = Emission Level - Limit value

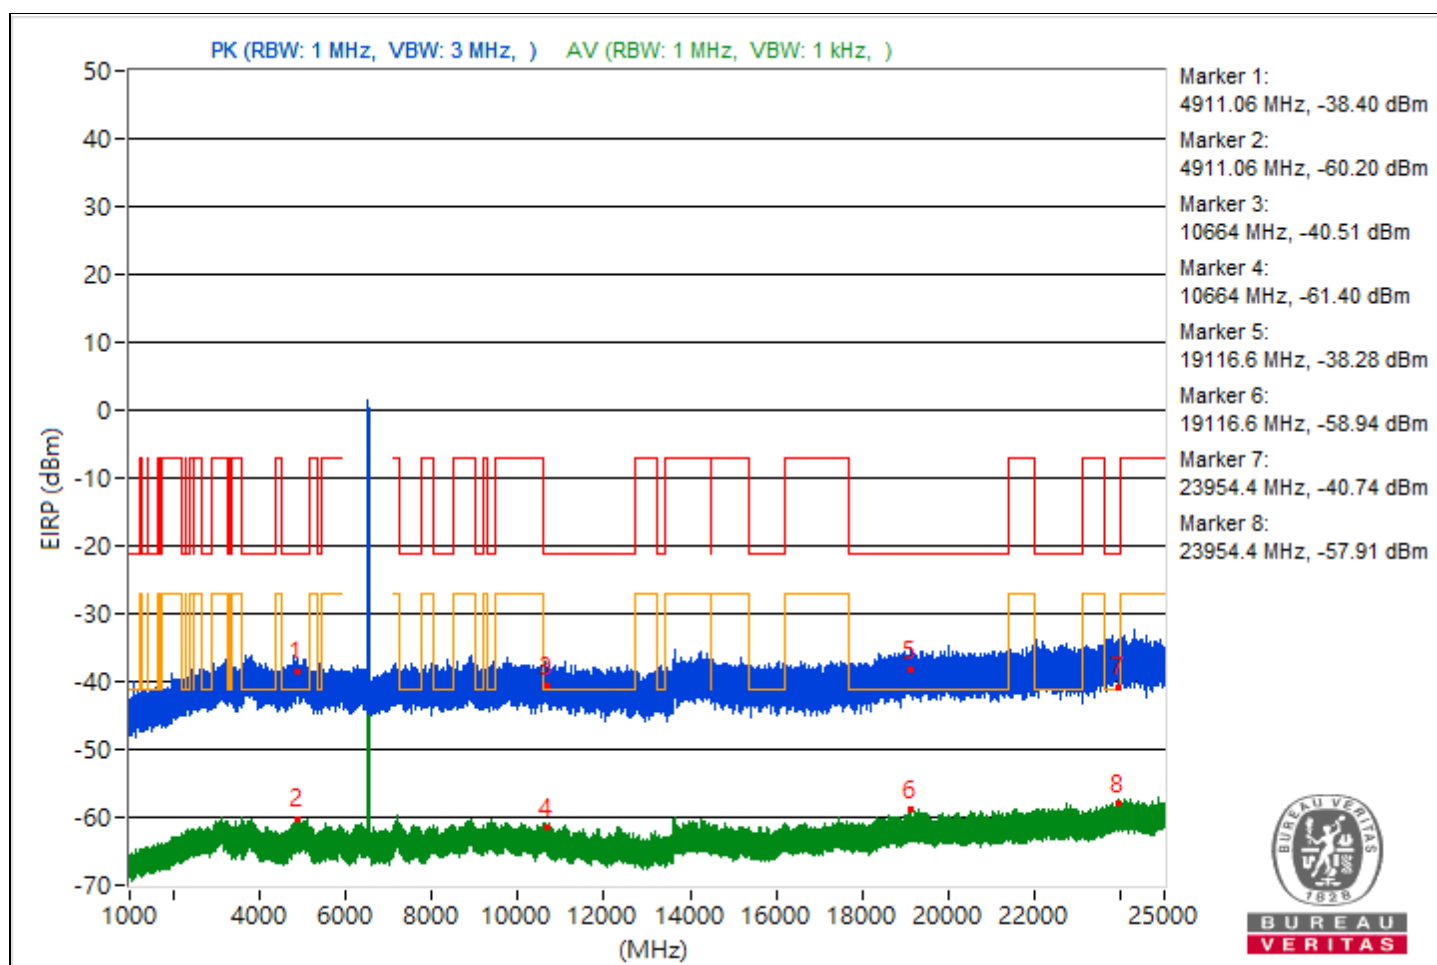


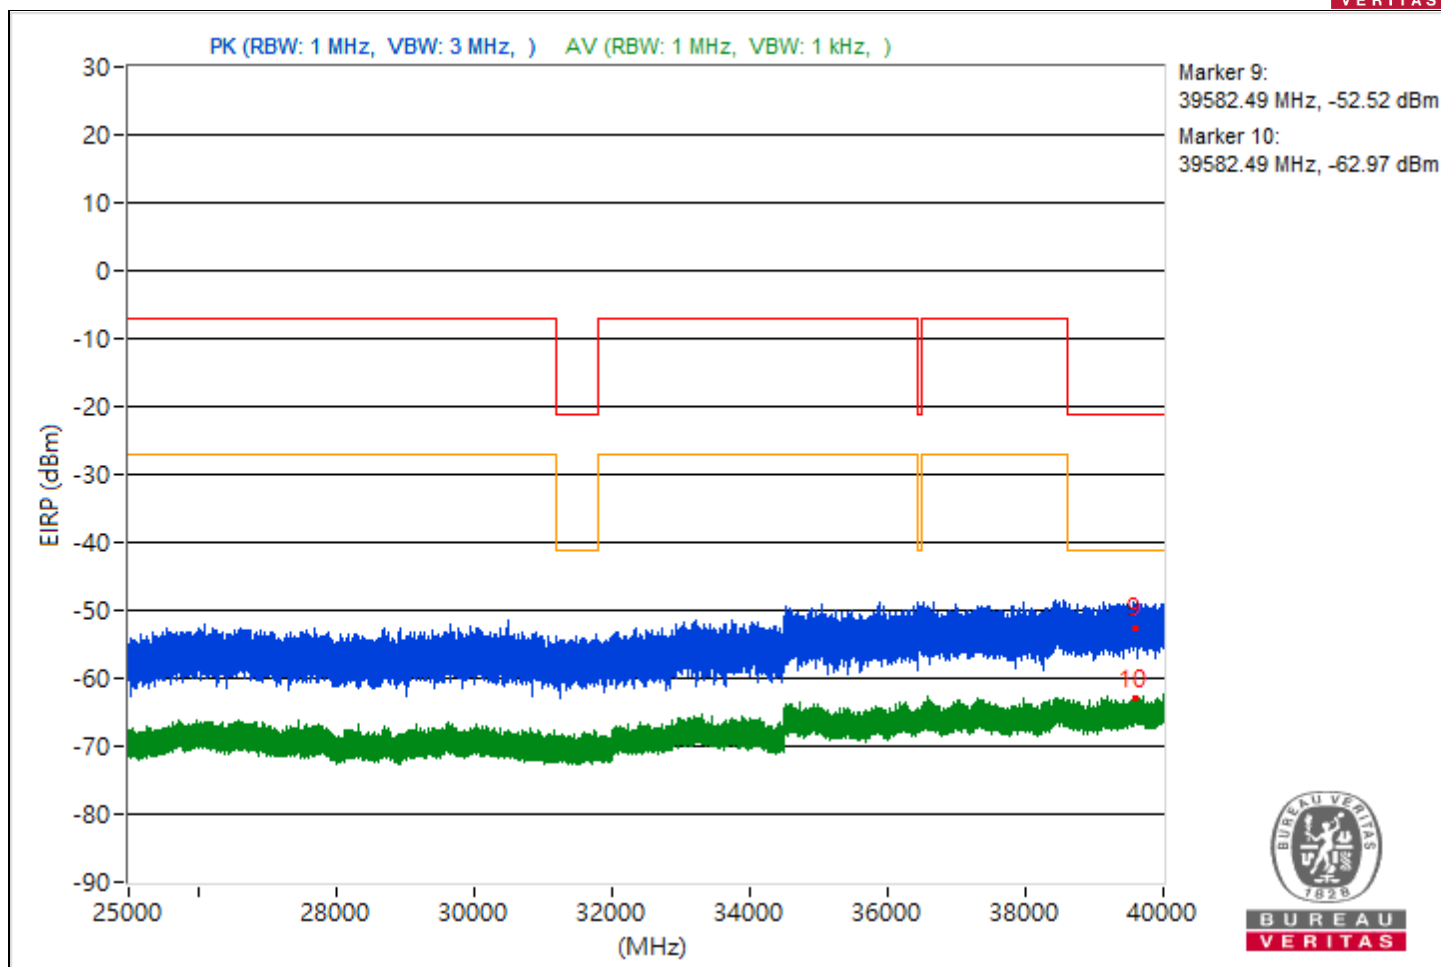


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3815.87	54.32 PK	74	-19.68	-51.97	-52.28	8.17	-40.94
2	3815.87	34.99 AV	54	-19.01	-73.5	-70.06	8.17	-60.27
3	10620.18	54.63 PK	74	-19.37	-52.57	-51.17	8.17	-40.63
4	10620.18	34.3 AV	54	-19.7	-71	-73.69	8.17	-60.96
5	20506.1	55.43 PK	74	-18.57	-51.67	-50.43	8.17	-39.83
6	20506.1	35.68 AV	54	-18.32	-73.73	-69.01	8.17	-59.58
7	23970.1	59.52 PK	74	-14.48	-49.14	-45.46	8.17	-35.74
8	23970.1	37.92 AV	54	-16.08	-67.79	-69.4	8.17	-57.34
9	39962.22	43.68 PK	74	-30.32	-63.23	-62.35	8.17	-51.58
10	39962.22	32.75 AV	54	-21.25	-72.93	-74.61	8.17	-62.51

Note: Margin value = Emission Level - Limit value

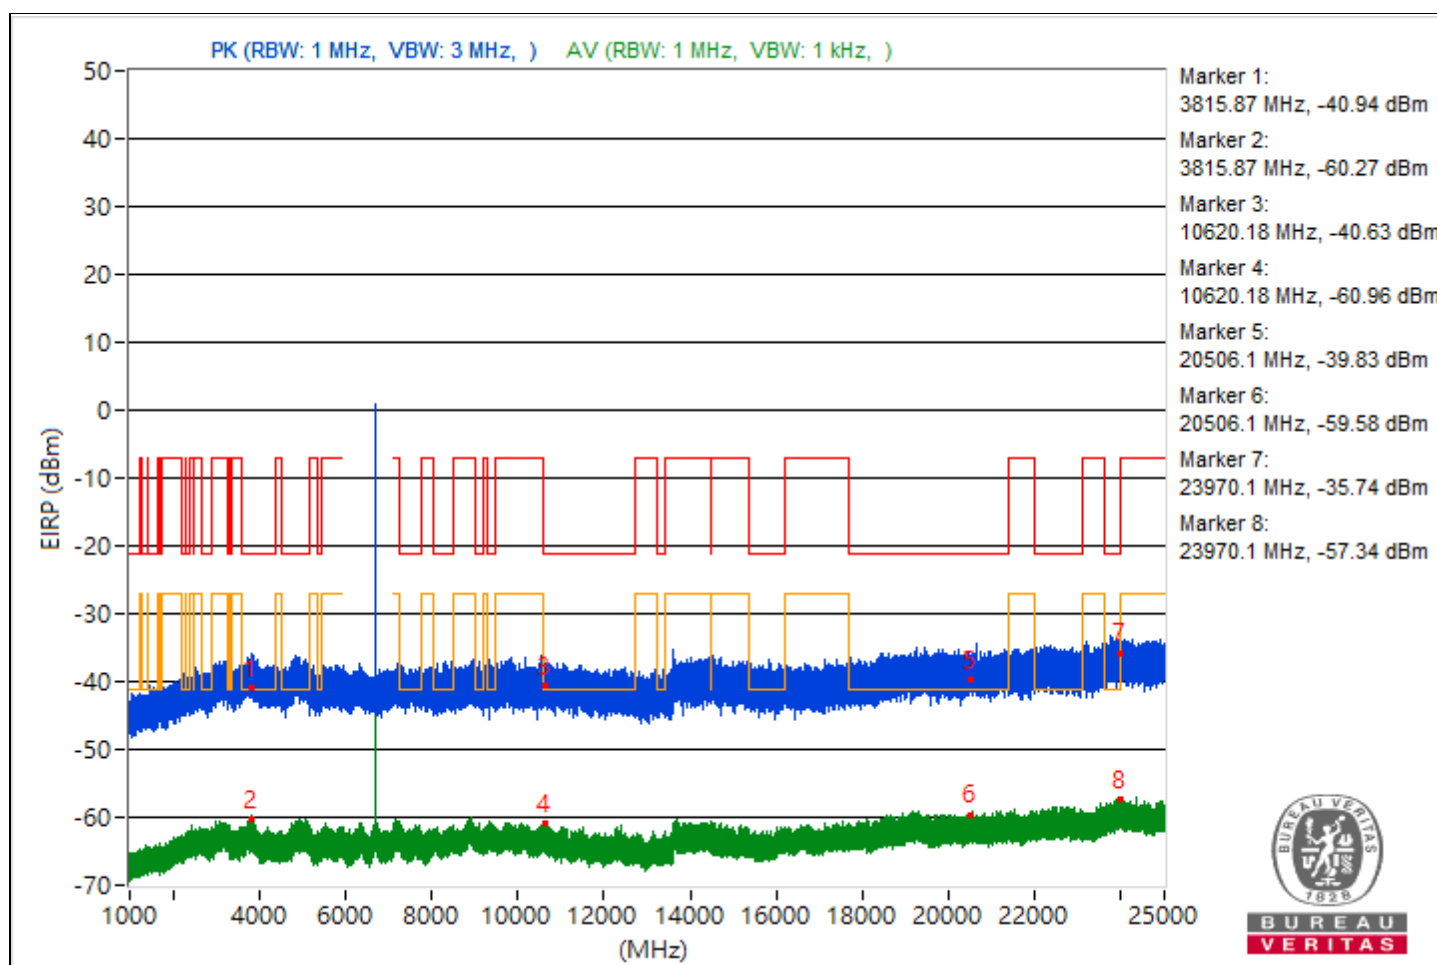


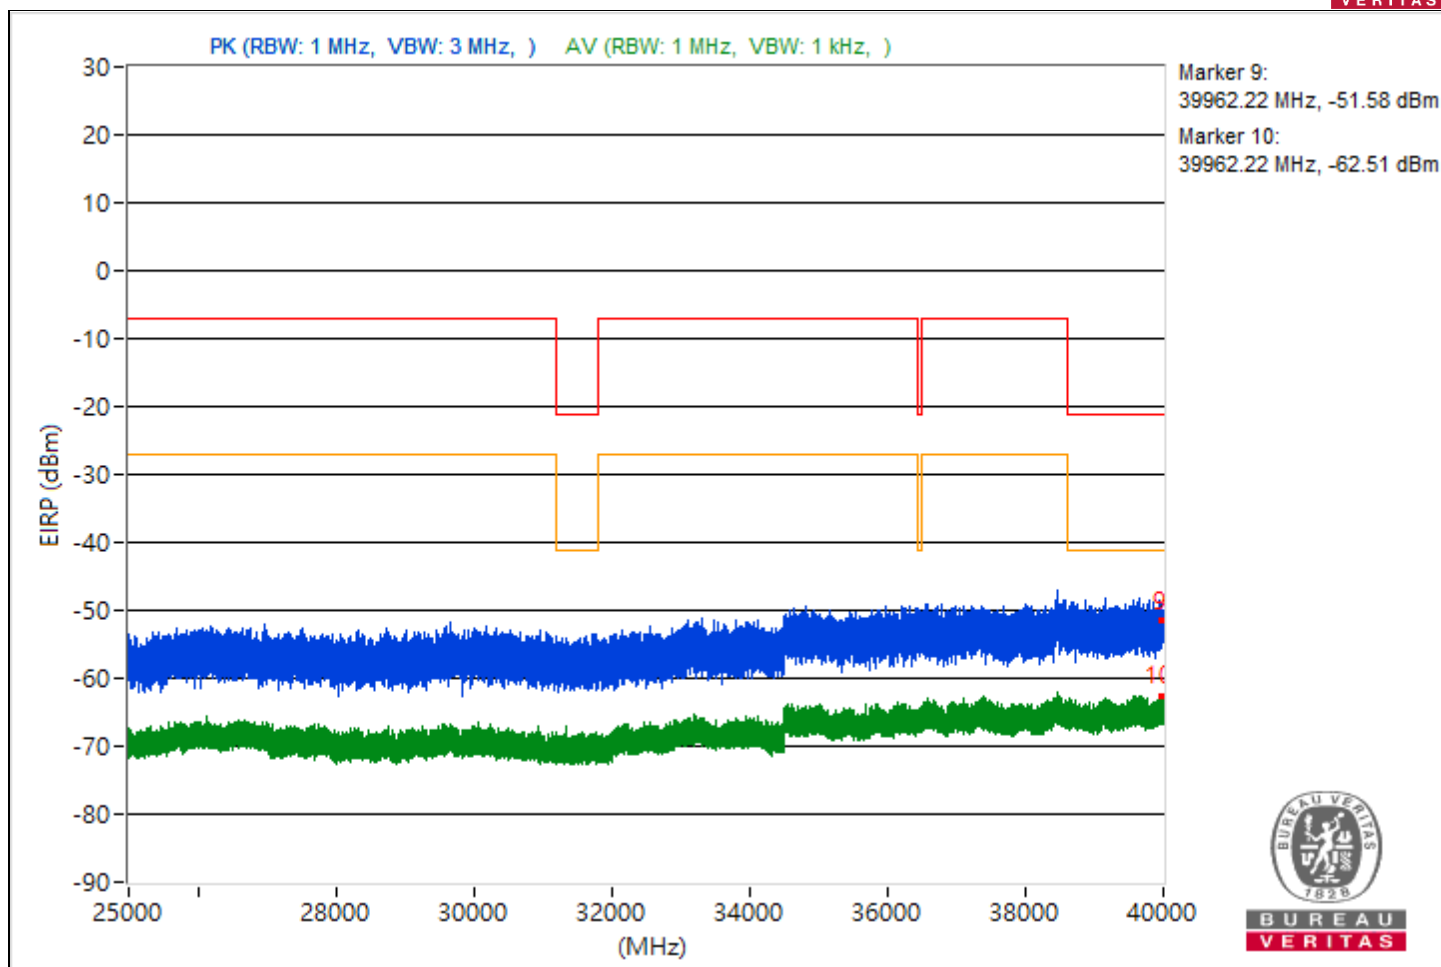


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3849.54	57.32 PK	74	-16.68	-49.11	-49.12	8.17	-37.94
2	3849.54	34.82 AV	54	-19.18	-70.46	-73.2	8.17	-60.44
3	10625.87	53.83 PK	74	-20.17	-53.01	-52.25	8.17	-41.43
4	10625.87	34.47 AV	54	-19.53	-70.6	-73.98	8.17	-60.79
5	20871.9	55.31 PK	74	-18.69	-50.42	-51.98	8.17	-39.95
6	20871.9	36.09 AV	54	-17.91	-68.98	-72.38	8.17	-59.17
7	23961.2	58.74 PK	74	-15.26	-46.59	-49.19	8.17	-36.52
8	23961.2	37.75 AV	54	-16.25	-67.42	-70.47	8.17	-57.51
9	39132.71	43.52 PK	74	-30.48	-62.63	-63.24	8.17	-51.74
10	39132.71	32.23 AV	54	-21.77	-76.27	-72.82	8.17	-63.03

Note: Margin value = Emission Level - Limit value

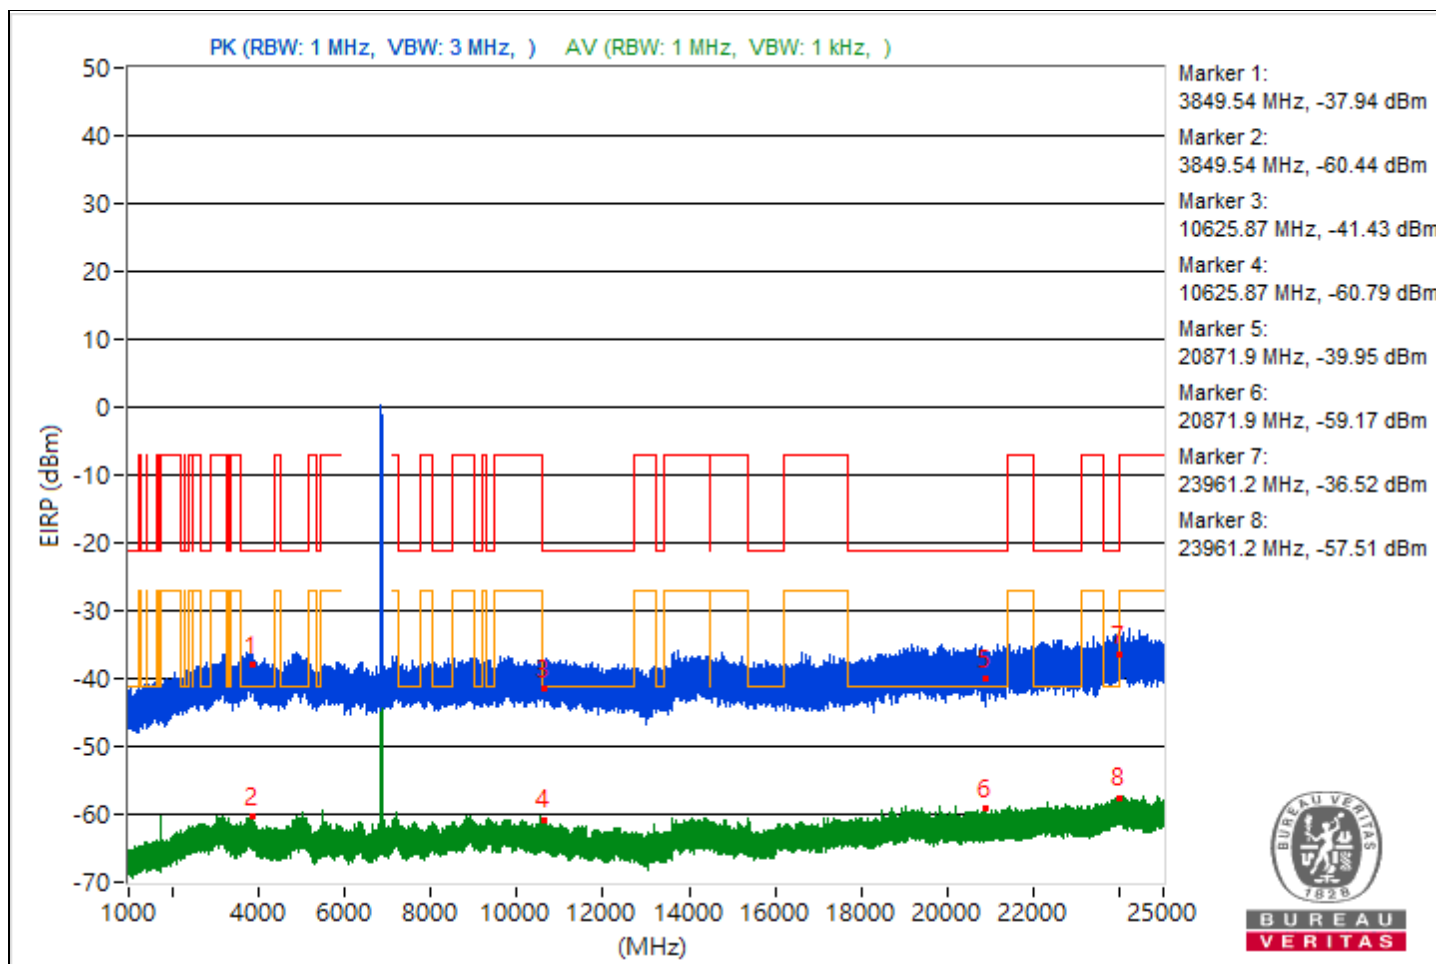


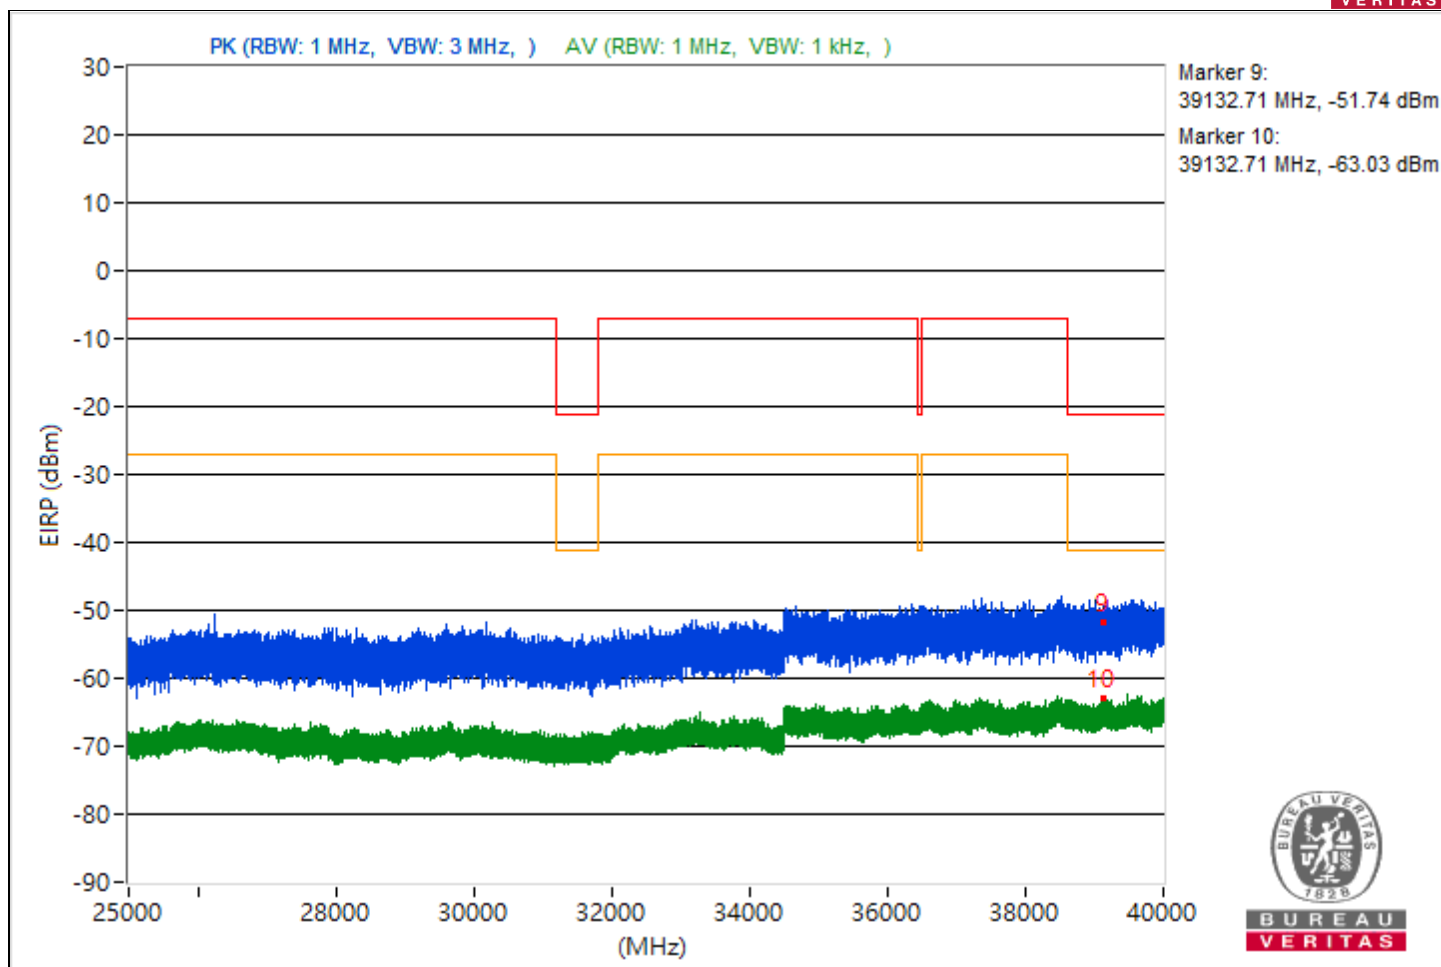


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4798.12	54.53 PK	74	-19.47	-50.65	-53.7	8.17	-40.73
2	4798.12	34.99 AV	54	-19.01	-72.58	-70.55	8.17	-60.27
3	11870.22	52.11 PK	74	-21.89	-53.63	-55.16	8.17	-43.15
4	11870.22	34.28 AV	54	-19.72	-78.47	-69.69	8.17	-60.98
5	19379.8	55.75 PK	74	-18.25	-52.04	-49.67	8.17	-39.51
6	19379.8	35.74 AV	54	-18.26	-69.13	-73.2	8.17	-59.52
7	23911	60.43 PK	74	-13.57	-45.14	-47.1	8.17	-34.83
8	23911	37.55 AV	54	-16.45	-67.46	-71.02	8.17	-57.71
9	39646.84	43.19 PK	74	-30.81	-64.28	-62.42	8.17	-52.07
10	39646.84	31.8 AV	54	-22.2	-77.2	-73.04	8.17	-63.46

Note: Margin value = Emission Level - Limit value

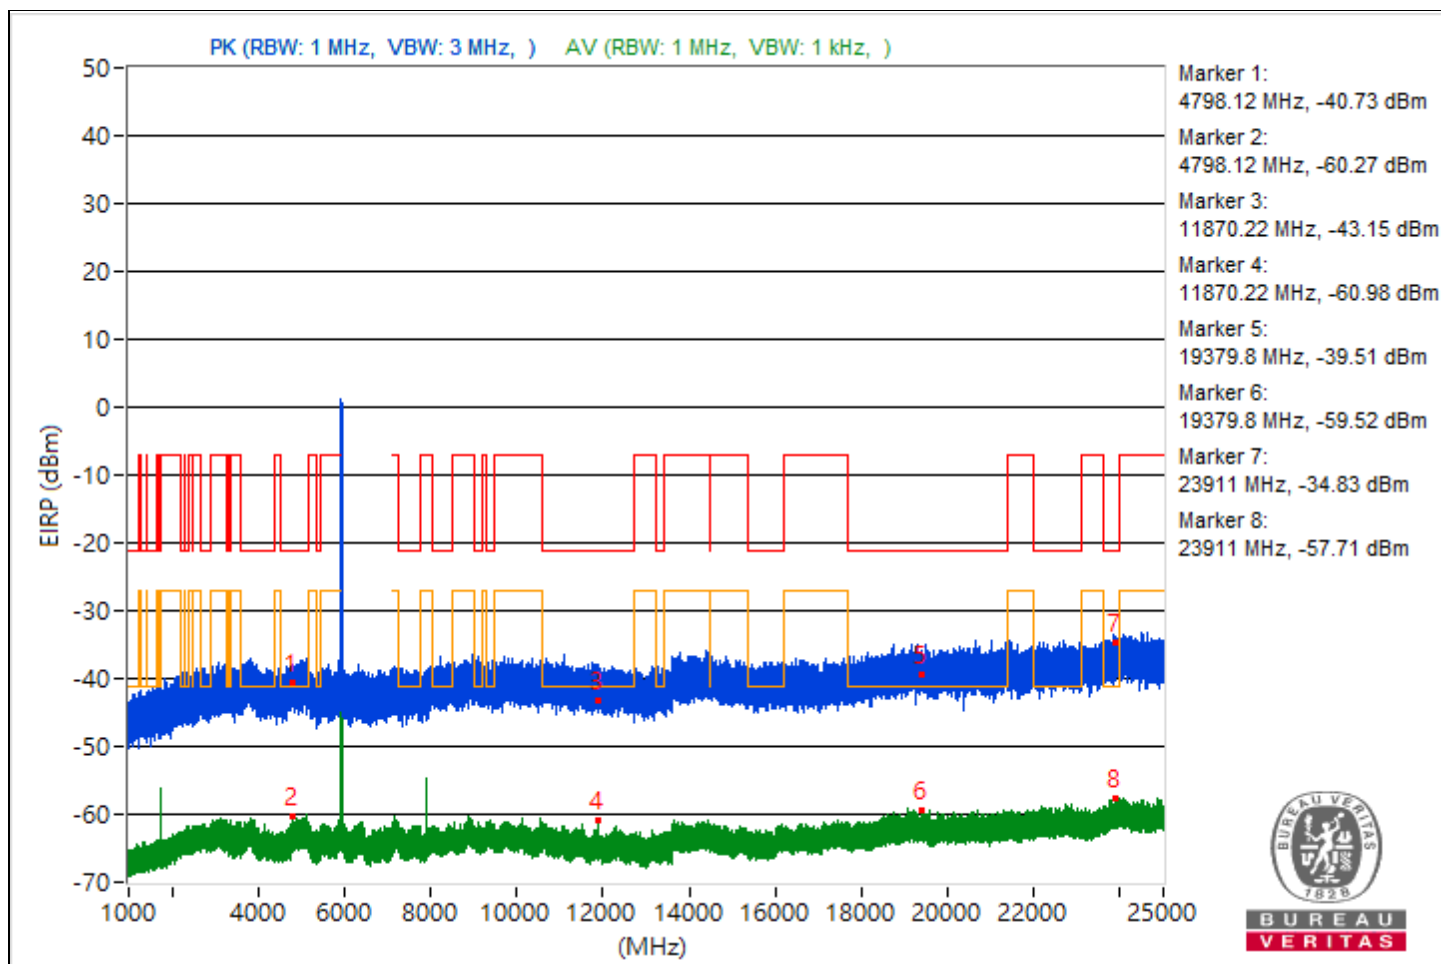


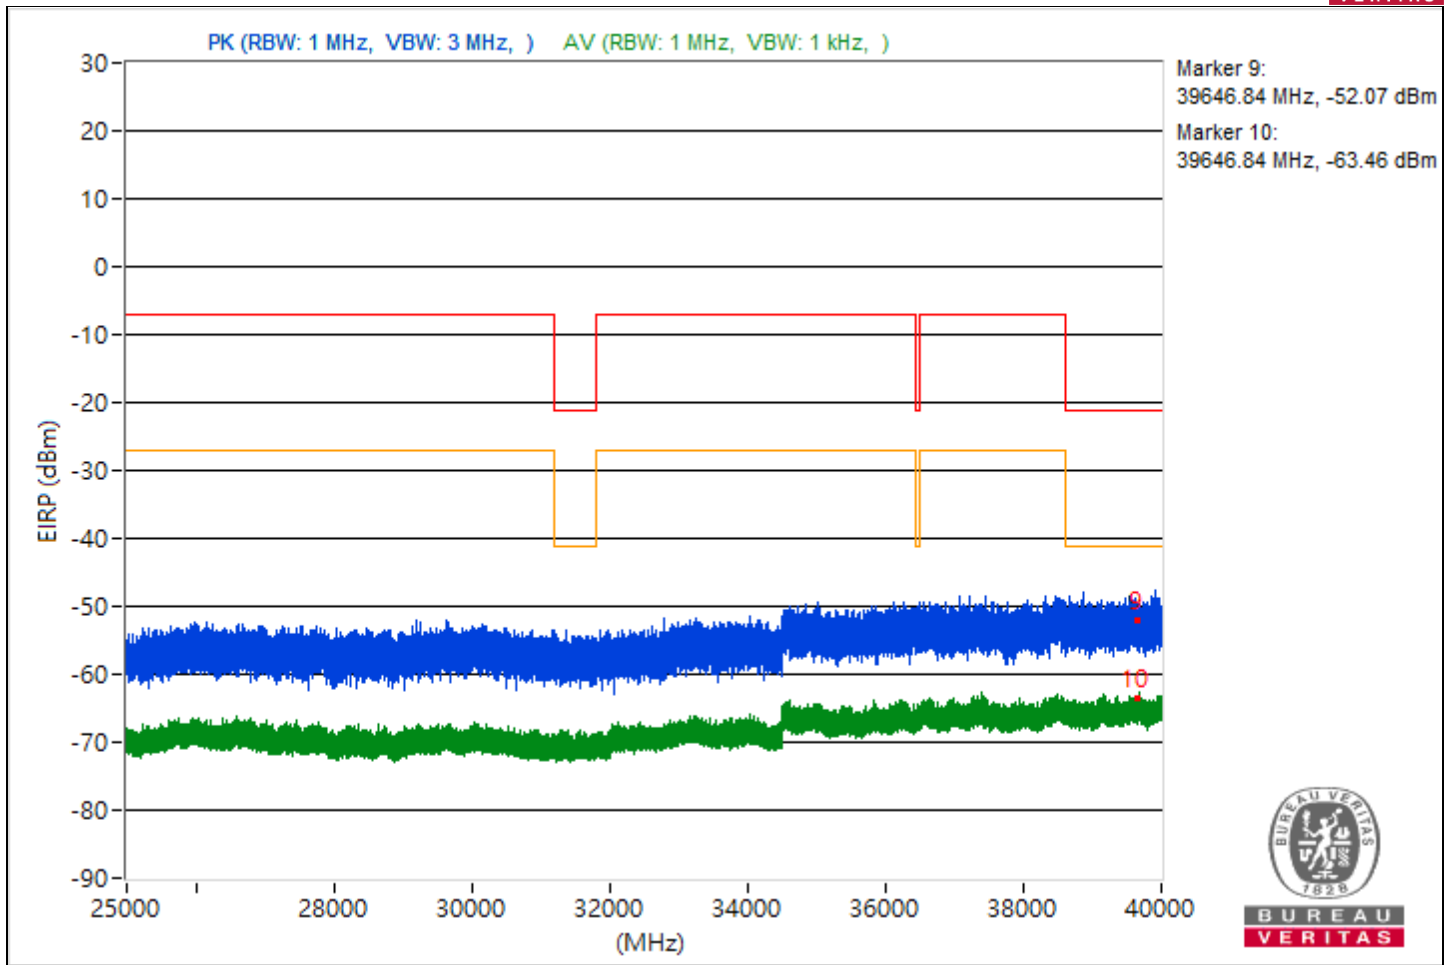


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5104.26	55.28 PK	74	-18.72	-51.44	-50.89	8.17	-39.98
2	5104.26	35.57 AV	54	-18.43	-69.98	-71.99	8.17	-59.69
3	11910.22	52.96 PK	74	-21.04	-52.34	-55.04	8.17	-42.3
4	11910.22	35.36 AV	54	-18.64	-76.73	-68.71	8.17	-59.9
5	19291.7	55.76 PK	74	-18.24	-50.04	-51.43	8.17	-39.5
6	19291.7	35.97 AV	54	-18.03	-72.28	-69.2	8.17	-59.29
7	23941.8	57.95 PK	74	-16.05	-50.76	-47.01	8.17	-37.31
8	23941.8	37.21 AV	54	-16.79	-70.97	-68	8.17	-58.05
9	39627.02	43.99 PK	74	-30.01	-61.74	-63.29	8.17	-51.27
10	39627.02	32.59 AV	54	-21.41	-72.25	-76.41	8.17	-62.67

Note: Margin value = Emission Level - Limit value

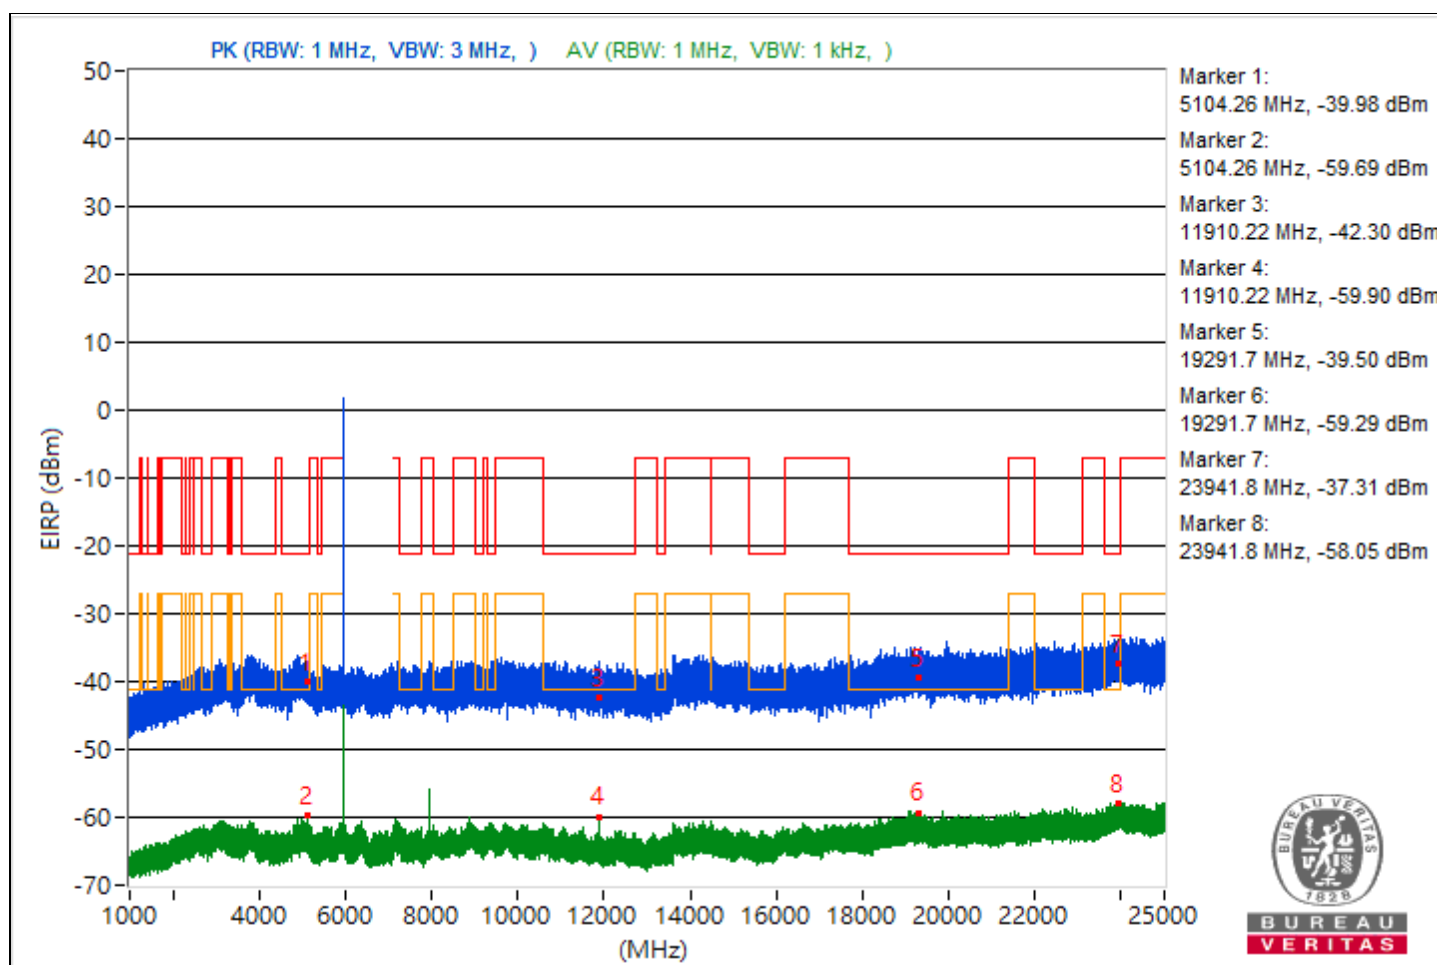


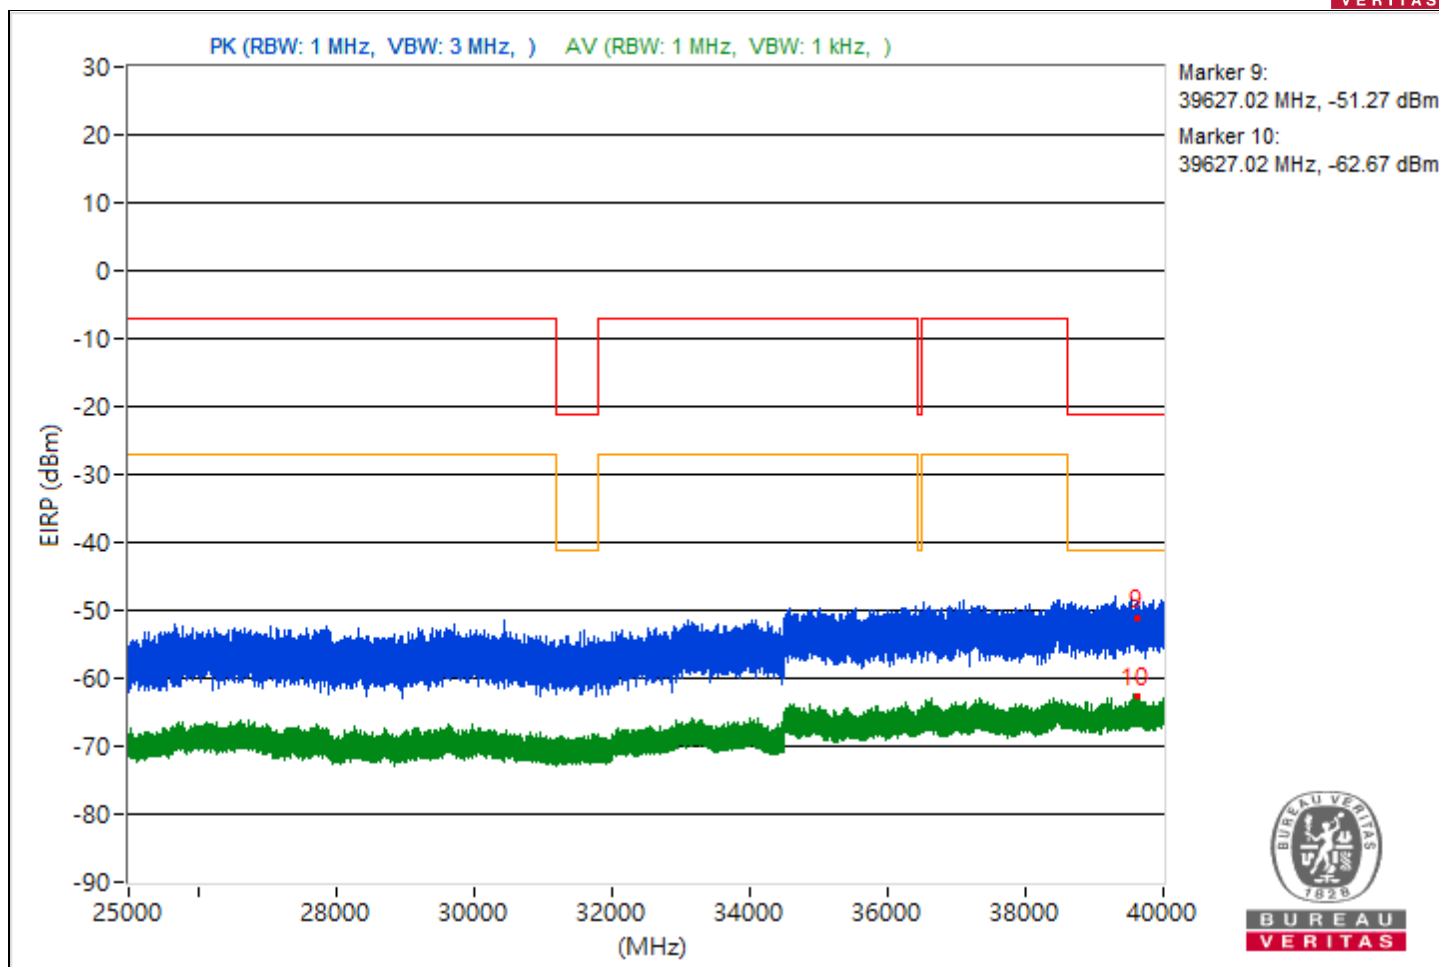


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4908.1	55.35 PK	74	-18.65	-52.19	-50.21	8.17	-39.91
2	4908.1	34.65 AV	54	-19.35	-73.57	-70.53	8.17	-60.61
3	9301.69	54.57 PK	74	-19.43	-51.82	-51.92	8.17	-40.69
4	9301.69	33.57 AV	54	-20.43	-76.01	-71.06	8.17	-61.69
5	19371.6	57.96 PK	74	-16.04	-49.13	-47.92	8.17	-37.3
6	19371.6	35.71 AV	54	-18.29	-69.02	-73.58	8.17	-59.55
7	23984.9	59.16 PK	74	-14.84	-46.24	-48.65	8.17	-36.1
8	23984.9	38.05 AV	54	-15.95	-67.55	-69.43	8.17	-57.21
9	39579.38	43.18 PK	74	-30.82	-63.02	-63.51	8.17	-52.08
10	39579.38	32.04 AV	54	-21.96	-72.66	-77.34	8.17	-63.22

Note: Margin value = Emission Level - Limit value

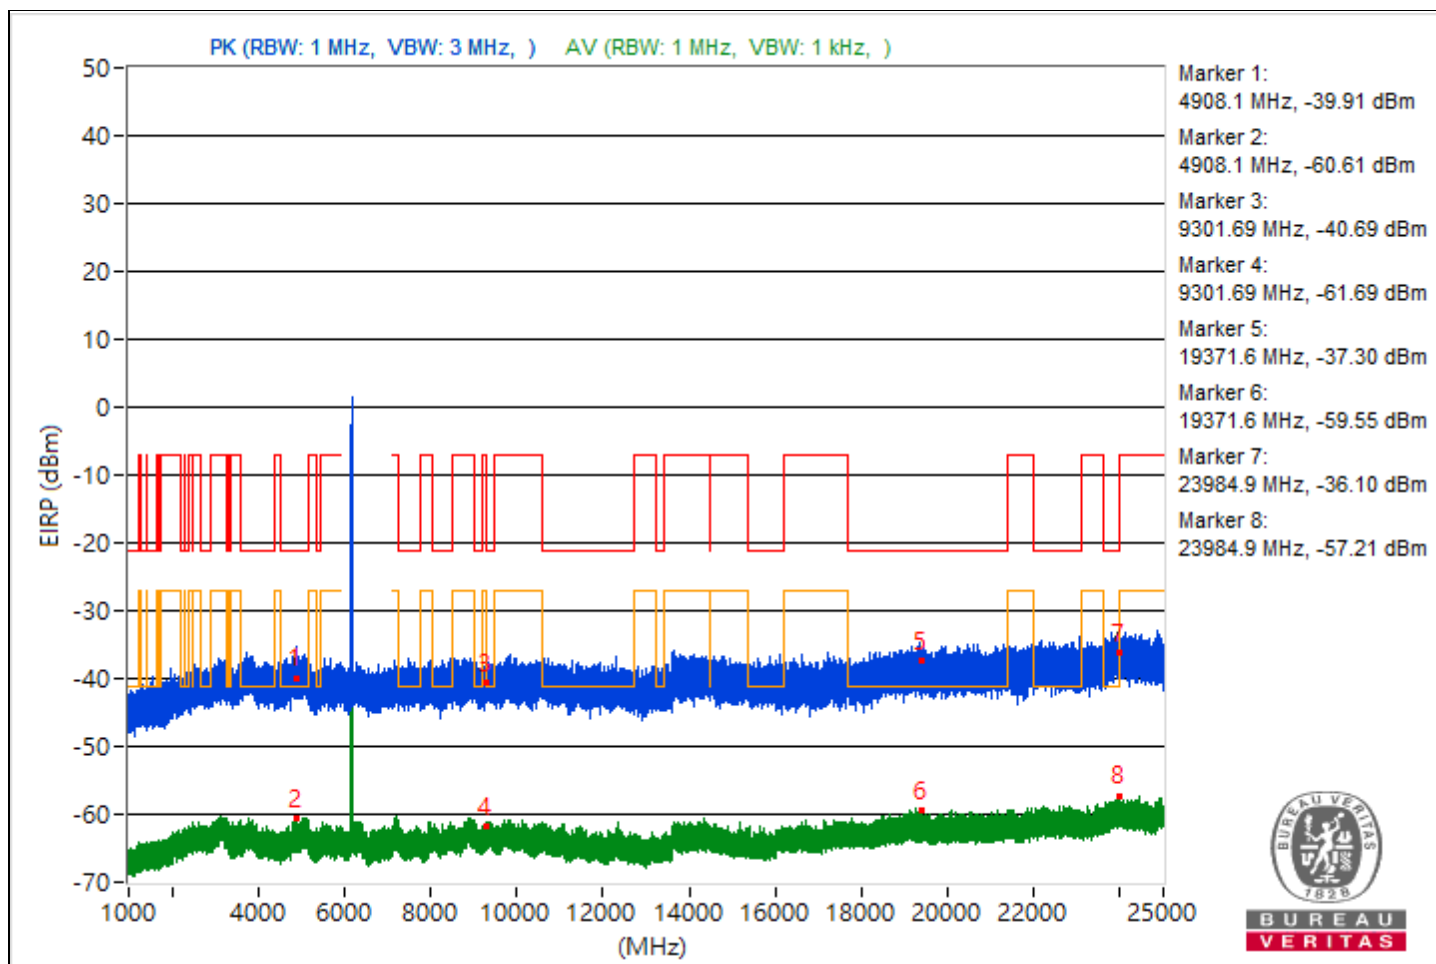


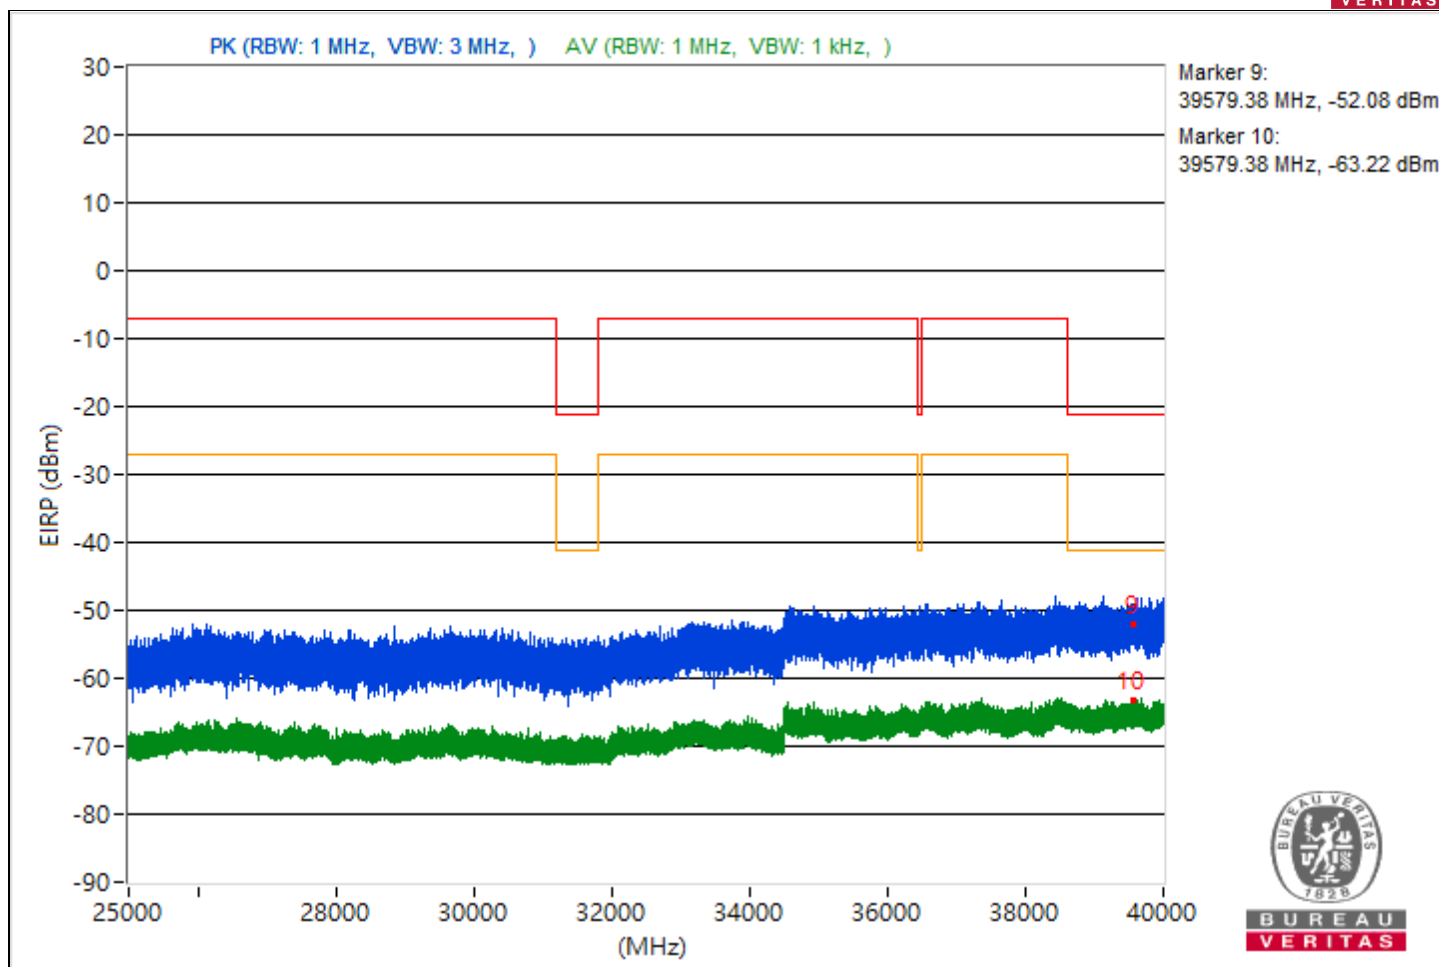


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4893.09	56.21 PK	74	-17.79	-53.13	-48.5	8.17	-39.05
2	4893.09	34.72 AV	54	-19.28	-70.15	-74.23	8.17	-60.54
3	9370.58	51.62 PK	74	-22.38	-54.32	-55.38	8.17	-43.64
4	9370.58	34.14 AV	54	-19.86	-73.9	-71.13	8.17	-61.12
5	20421.7	55.92 PK	74	-18.08	-51.1	-50.01	8.17	-39.34
6	20421.7	36.33 AV	54	-17.67	-71.25	-69.2	8.17	-58.93
7	23890.3	57.26 PK	74	-16.74	-51.65	-47.62	8.17	-38
8	23890.3	37.03 AV	54	-16.97	-71.25	-68.13	8.17	-58.23
9	39968.53	43.85 PK	74	-30.15	-62.61	-62.57	8.17	-51.41
10	39968.53	31.95 AV	54	-22.05	-76.82	-72.98	8.17	-63.31

Note: Margin value = Emission Level - Limit value

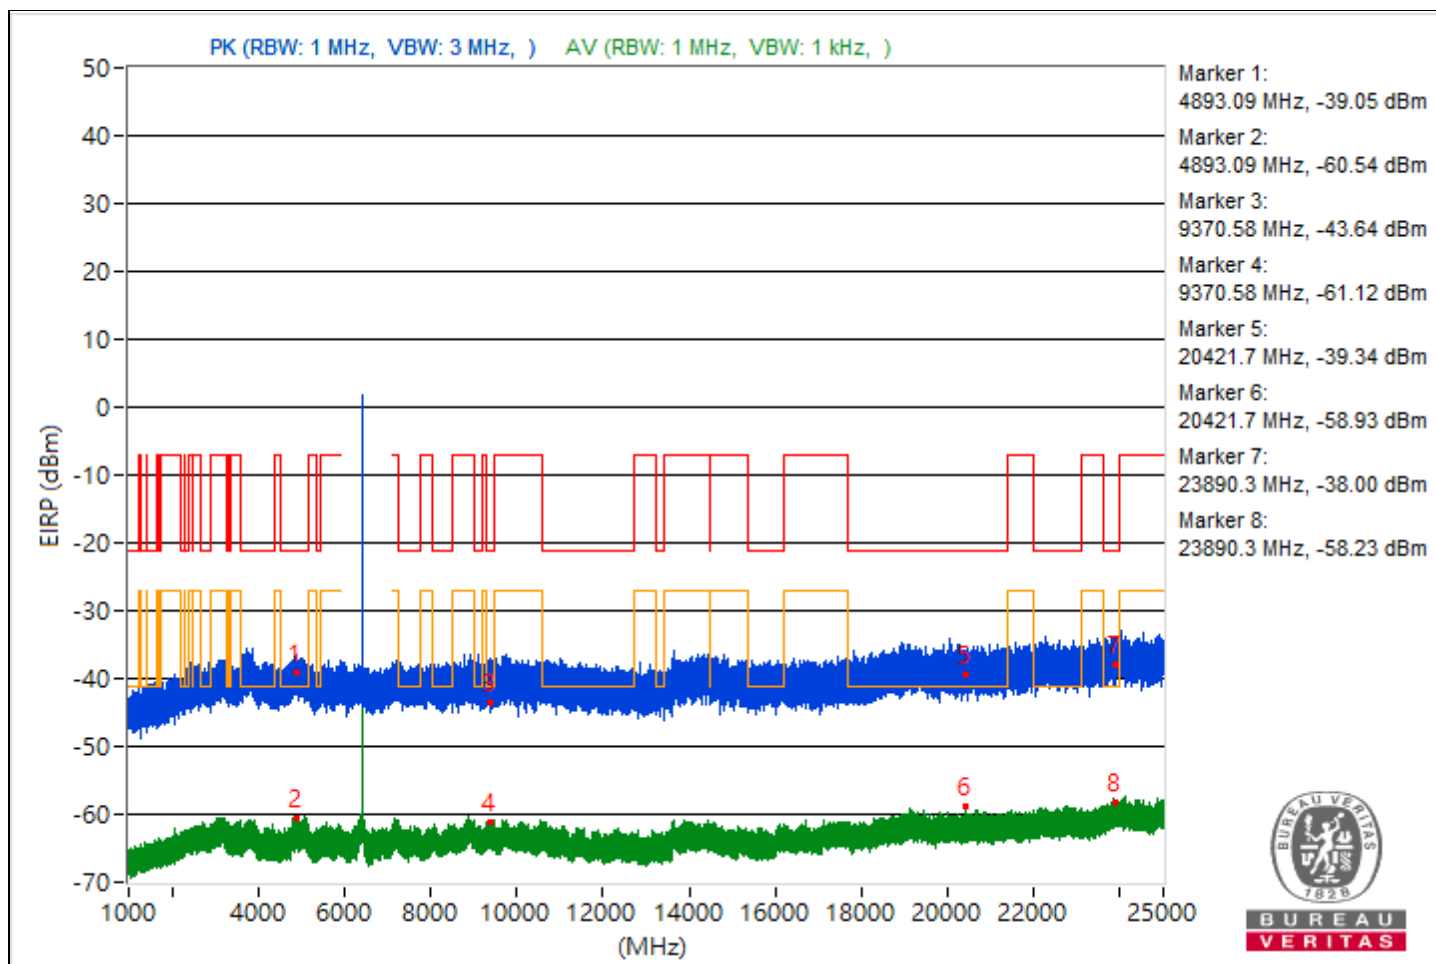


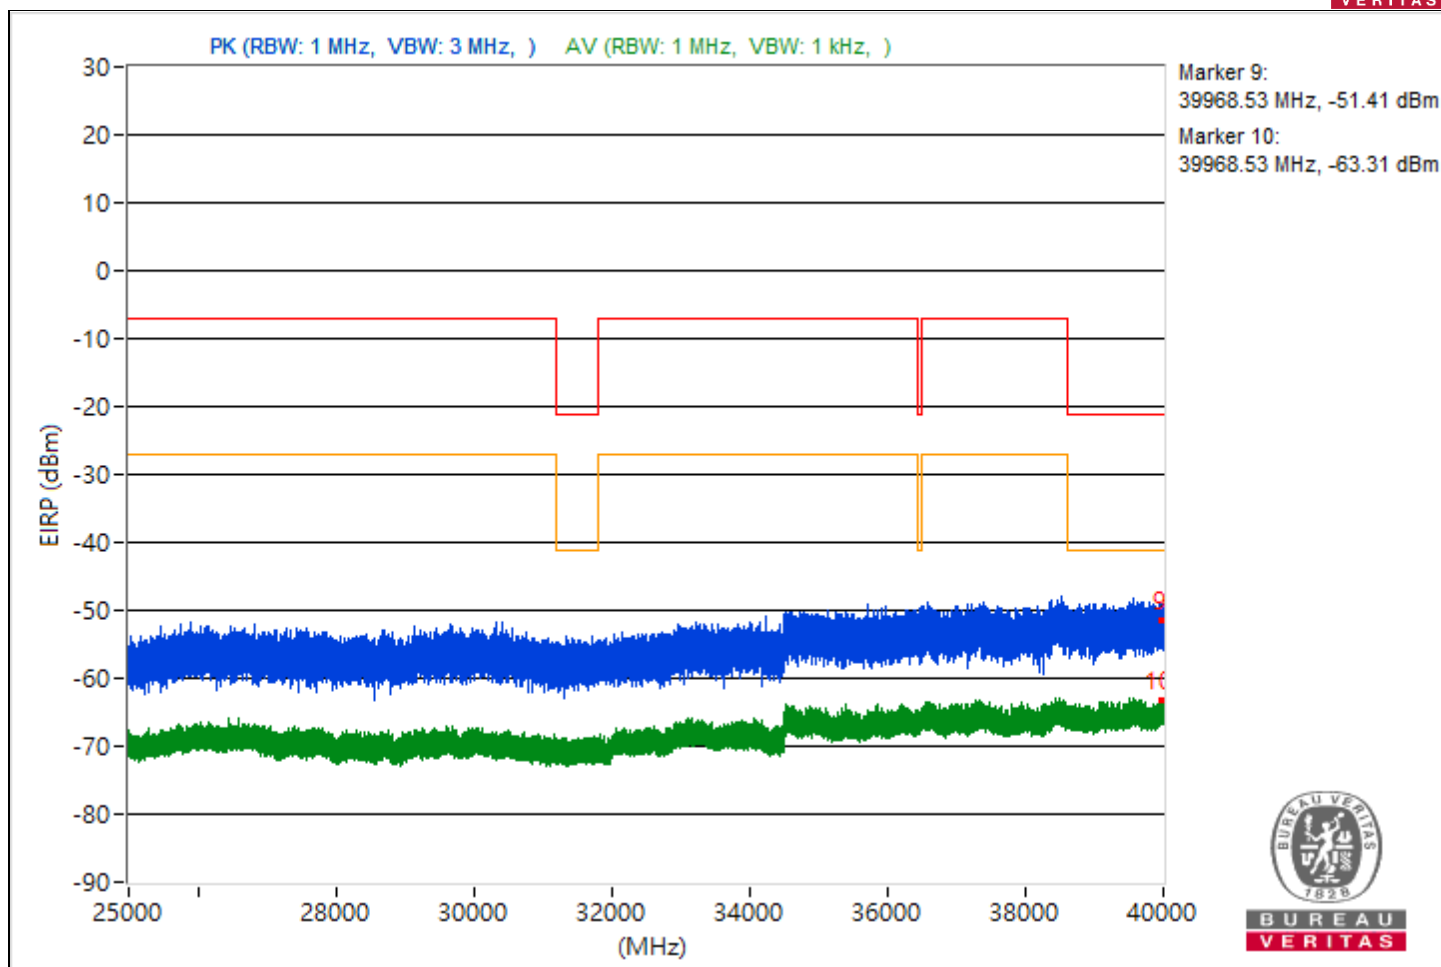


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4902.58	56.36 PK	74	-17.64	-51.25	-49.17	8.17	-38.9
2	4902.58	34.27 AV	54	-19.73	-70.41	-75.18	8.17	-60.99
3	10611.2	54.85 PK	74	-19.15	-51.06	-52.19	8.17	-40.41
4	10611.2	33.9 AV	54	-20.1	-74.64	-71.13	8.17	-61.36
5	20216.8	56 PK	74	-18	-50.17	-50.72	8.17	-39.26
6	20216.8	36.14 AV	54	-17.86	-71.83	-69.18	8.17	-59.12
7	23973.7	58.8 PK	74	-15.2	-48.04	-47.27	8.17	-36.46
8	23973.7	36.96 AV	54	-17.04	-68	-71.76	8.17	-58.3
9	39634.31	41.54 PK	74	-32.46	-65.48	-64.39	8.17	-53.72
10	39634.31	32.66 AV	54	-21.34	-71.73	-77.83	8.17	-62.6

Note: Margin value = Emission Level - Limit value

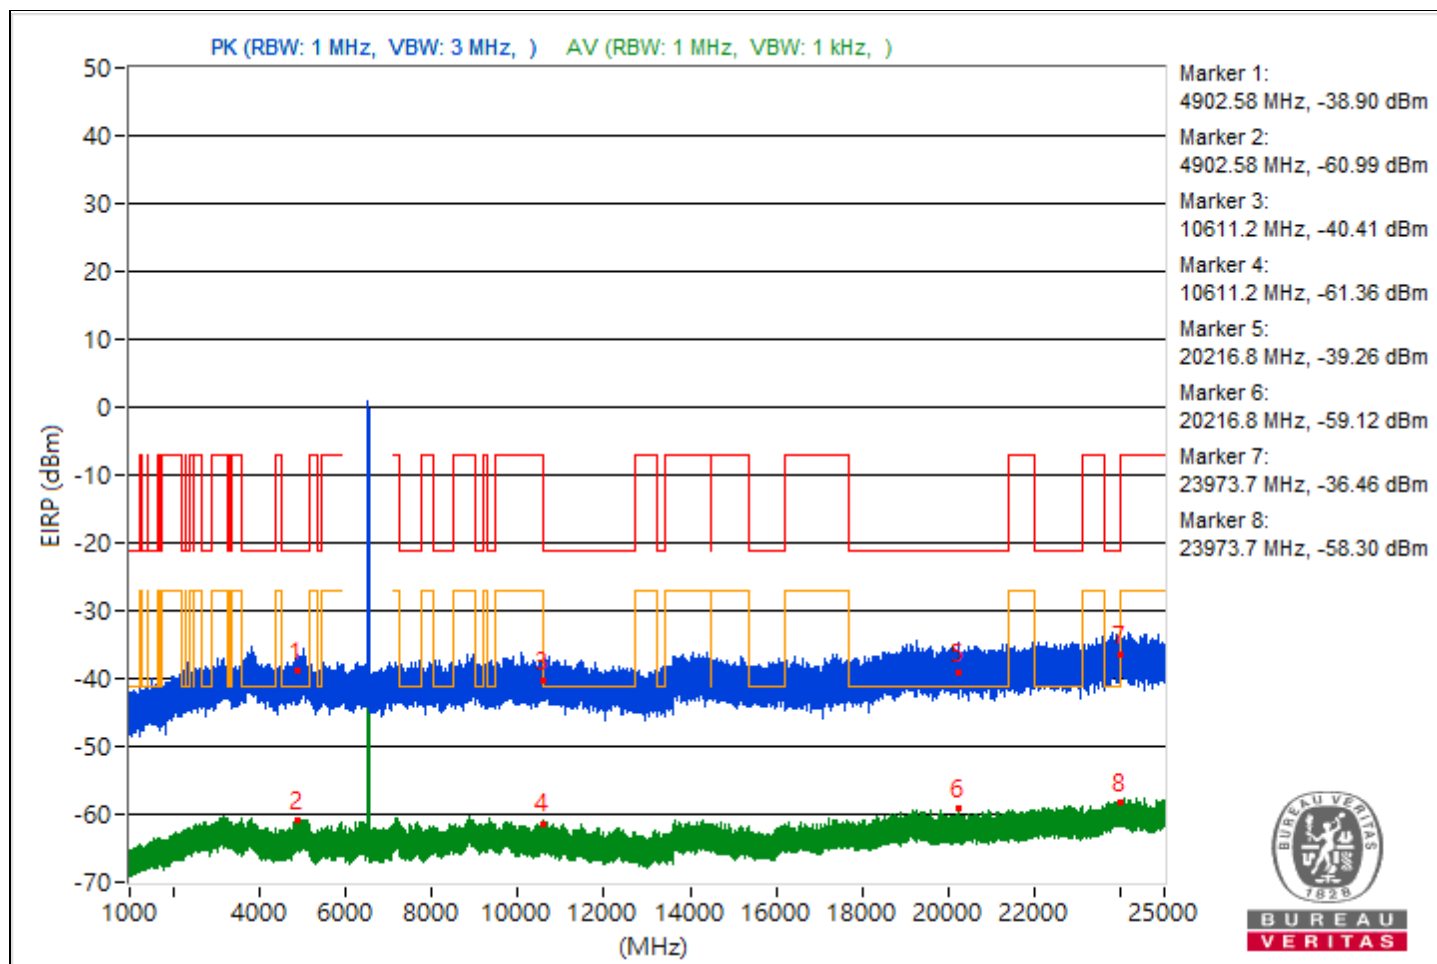


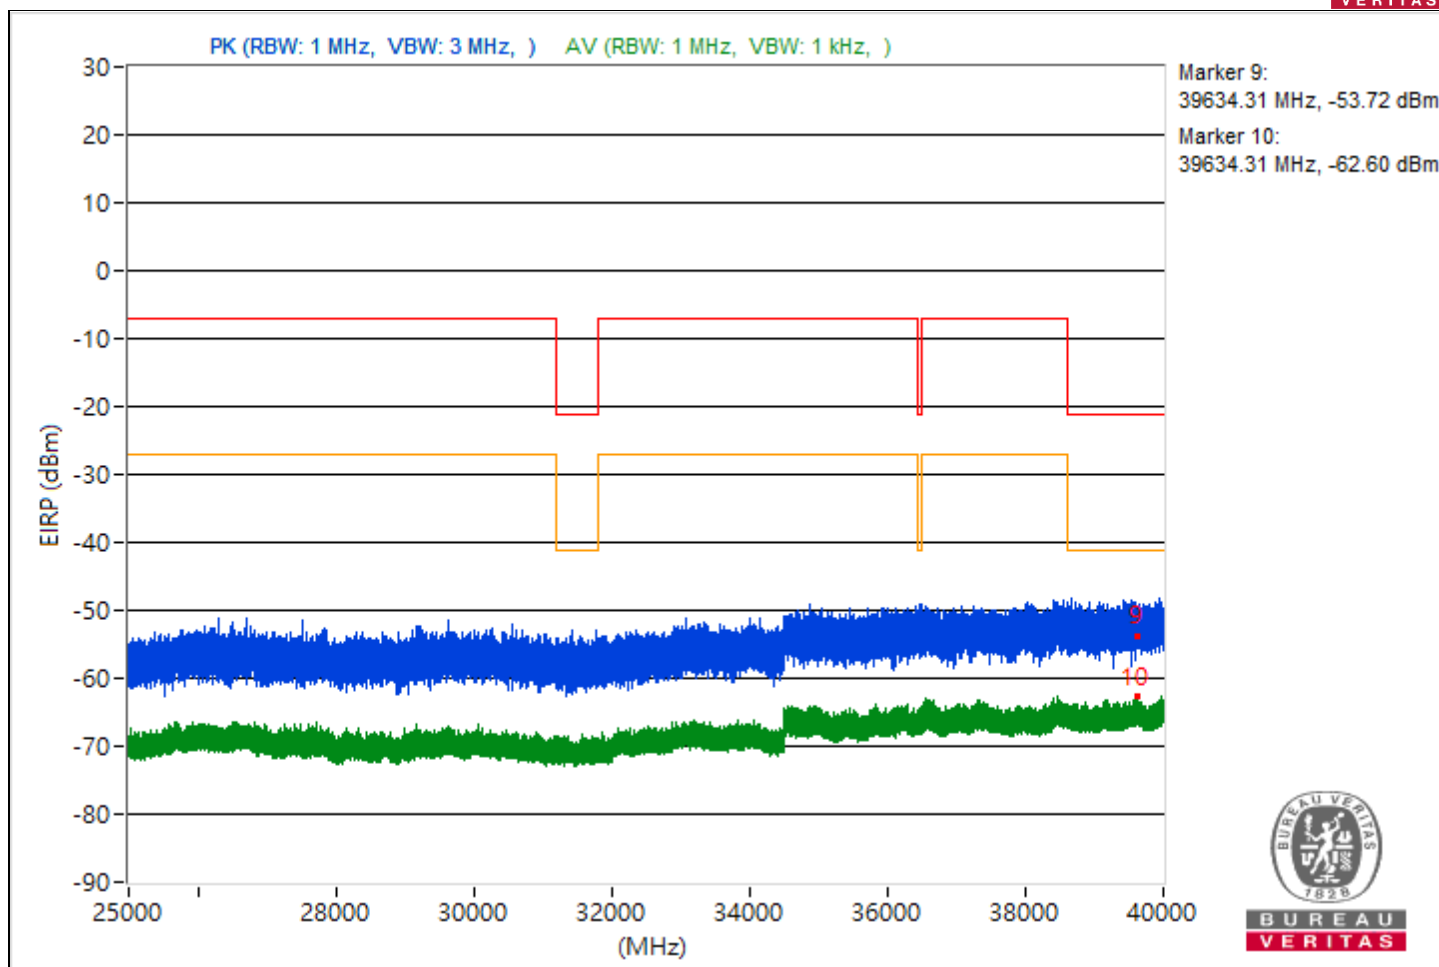


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4895.34	56.47 PK	74	-17.53	-49.19	-50.93	8.17	-38.79
2	4895.34	34.41 AV	54	-19.59	-74.56	-70.44	8.17	-60.85
3	10618.13	55.28 PK	74	-18.72	-52.01	-50.44	8.17	-39.98
4	10618.13	34.2 AV	54	-19.8	-70.75	-74.52	8.17	-61.06
5	21351	56.85 PK	74	-17.15	-51.04	-48.51	8.17	-38.41
6	21351	35.94 AV	54	-18.06	-69.18	-72.39	8.17	-59.32
7	23960.4	58.49 PK	74	-15.51	-47.36	-48.64	8.17	-36.77
8	23960.4	37.06 AV	54	-16.94	-72.03	-67.75	8.17	-58.2
9	39946.04	42.89 PK	74	-31.11	-66.46	-61.82	8.17	-52.37
10	39946.04	31.75 AV	54	-22.25	-72.99	-77.51	8.17	-63.51

Note: Margin value = Emission Level - Limit value

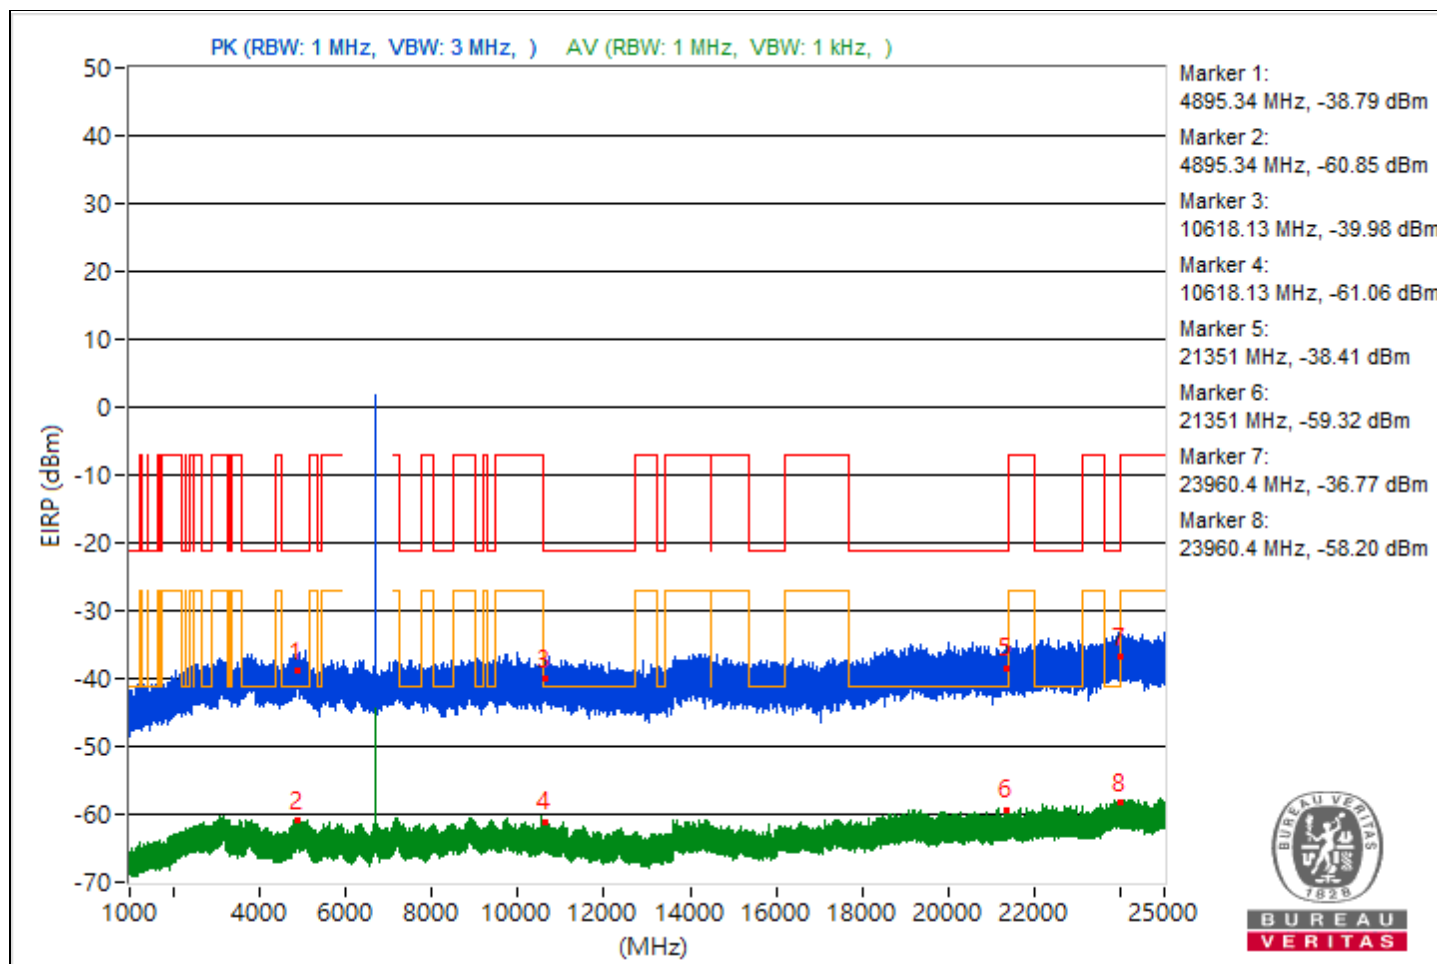


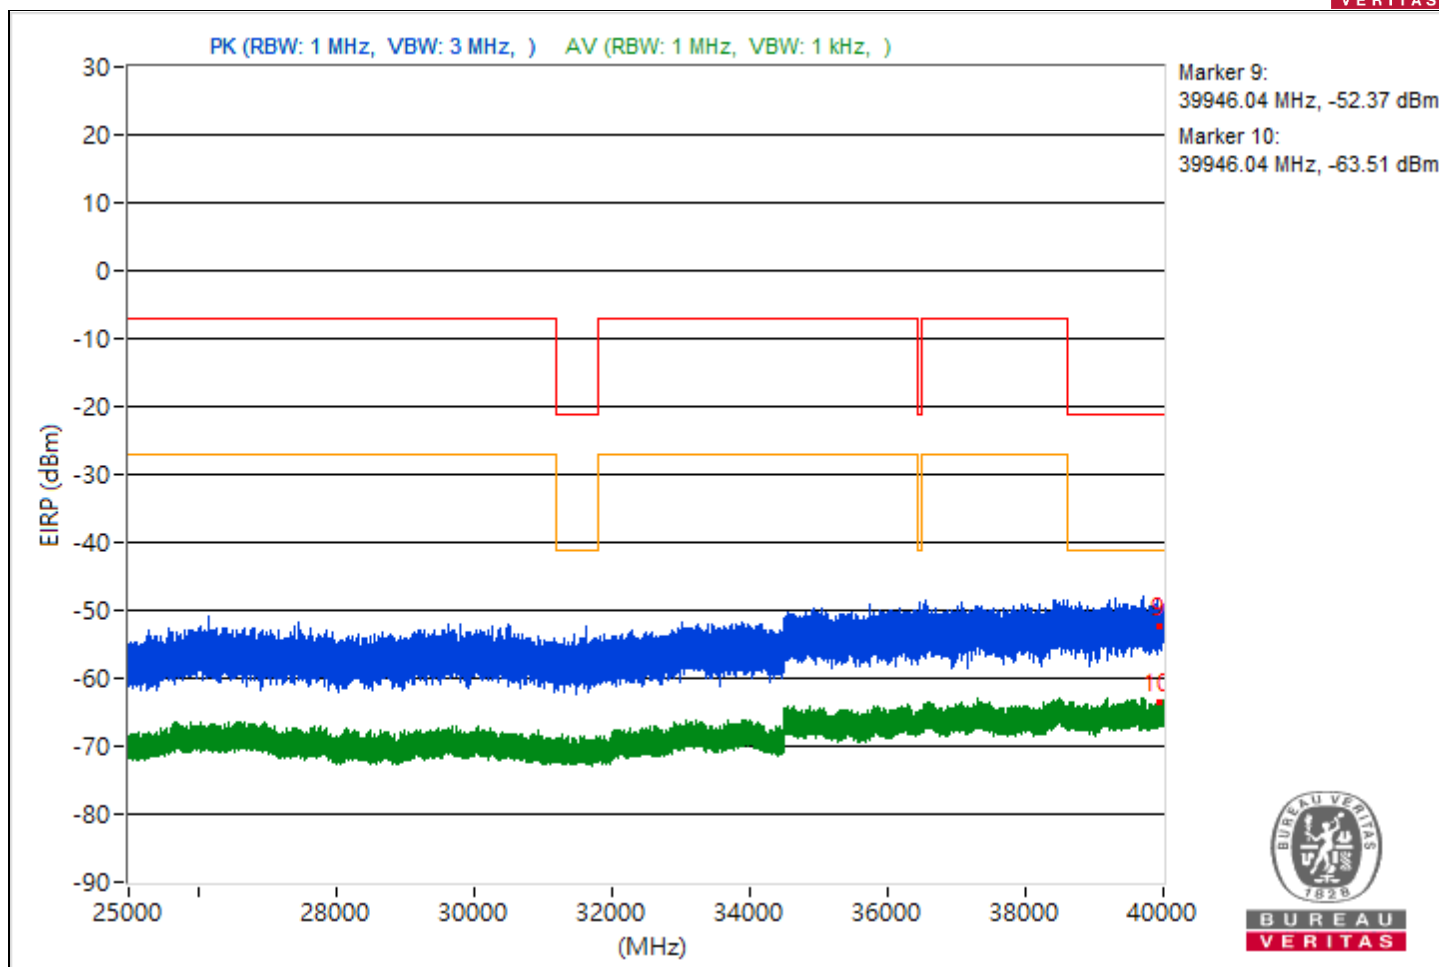


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5110.48	56.16 PK	74	-17.84	-50.12	-50.44	8.17	-39.1
2	5110.48	34.43 AV	54	-19.57	-74.24	-70.54	8.17	-60.83
3	9371.73	55.94 PK	74	-18.06	-50.74	-50.27	8.17	-39.32
4	9371.73	34.87 AV	54	-19.13	-70.92	-72.33	8.17	-60.39
5	19058.4	57.83 PK	74	-16.17	-50.84	-47.15	8.17	-37.43
6	19058.4	35.79 AV	54	-18.21	-73.03	-69.12	8.17	-59.47
7	23981.5	59.32 PK	74	-14.68	-46.61	-47.69	8.17	-35.94
8	23981.5	37.86 AV	54	-16.14	-70.35	-67.32	8.17	-57.4
9	39991.11	42.27 PK	74	-31.73	-63.62	-64.8	8.17	-52.99
10	39991.11	33.36 AV	54	-20.64	-74.53	-71.99	8.17	-61.9

Note: Margin value = Emission Level - Limit value

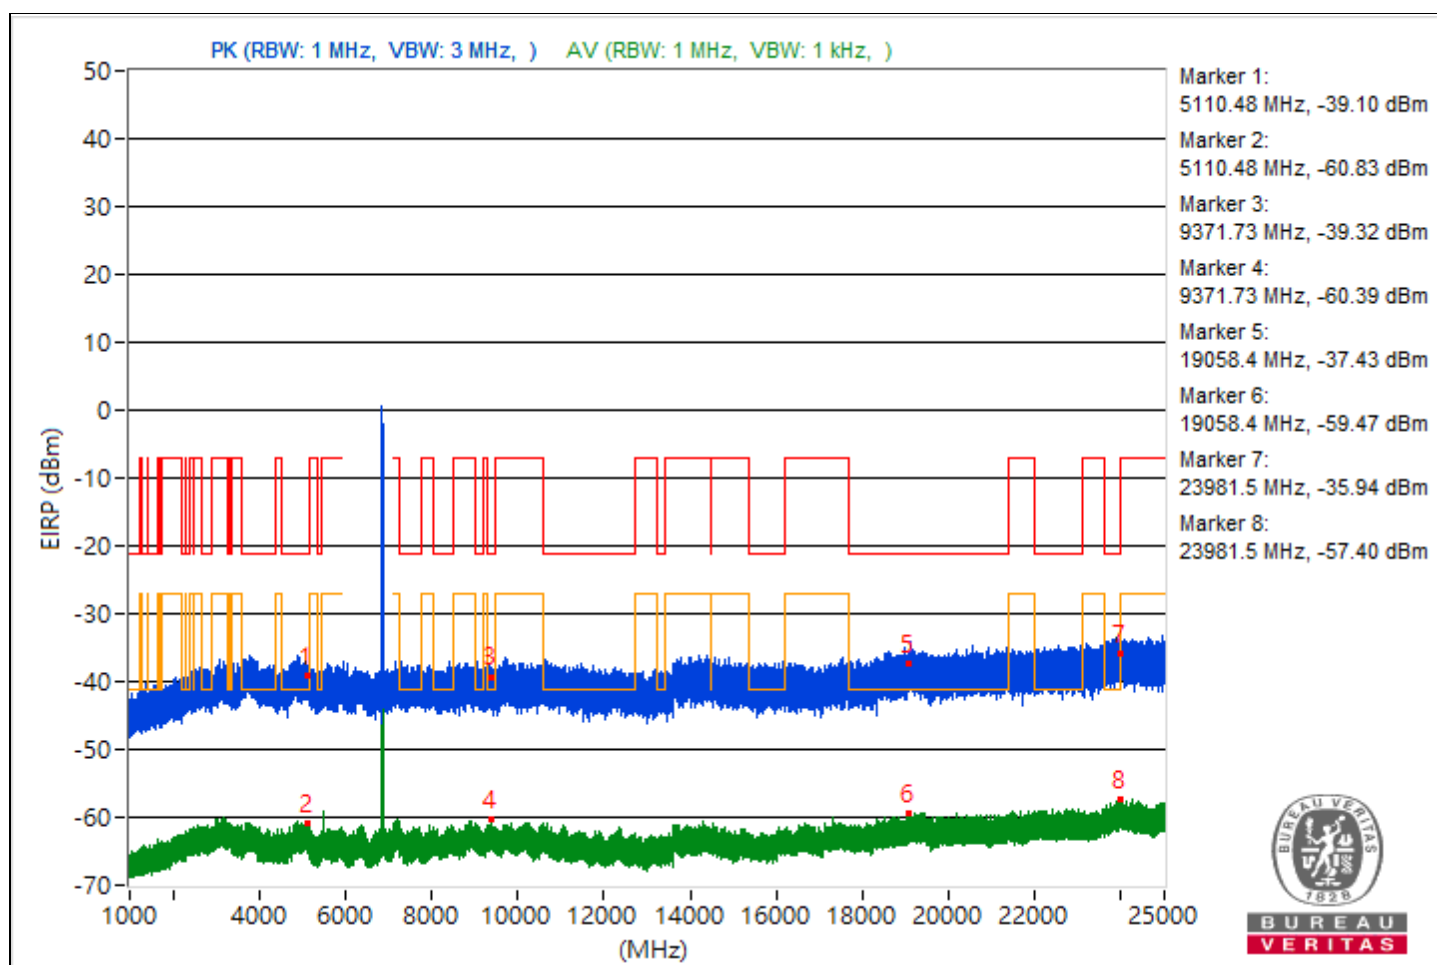


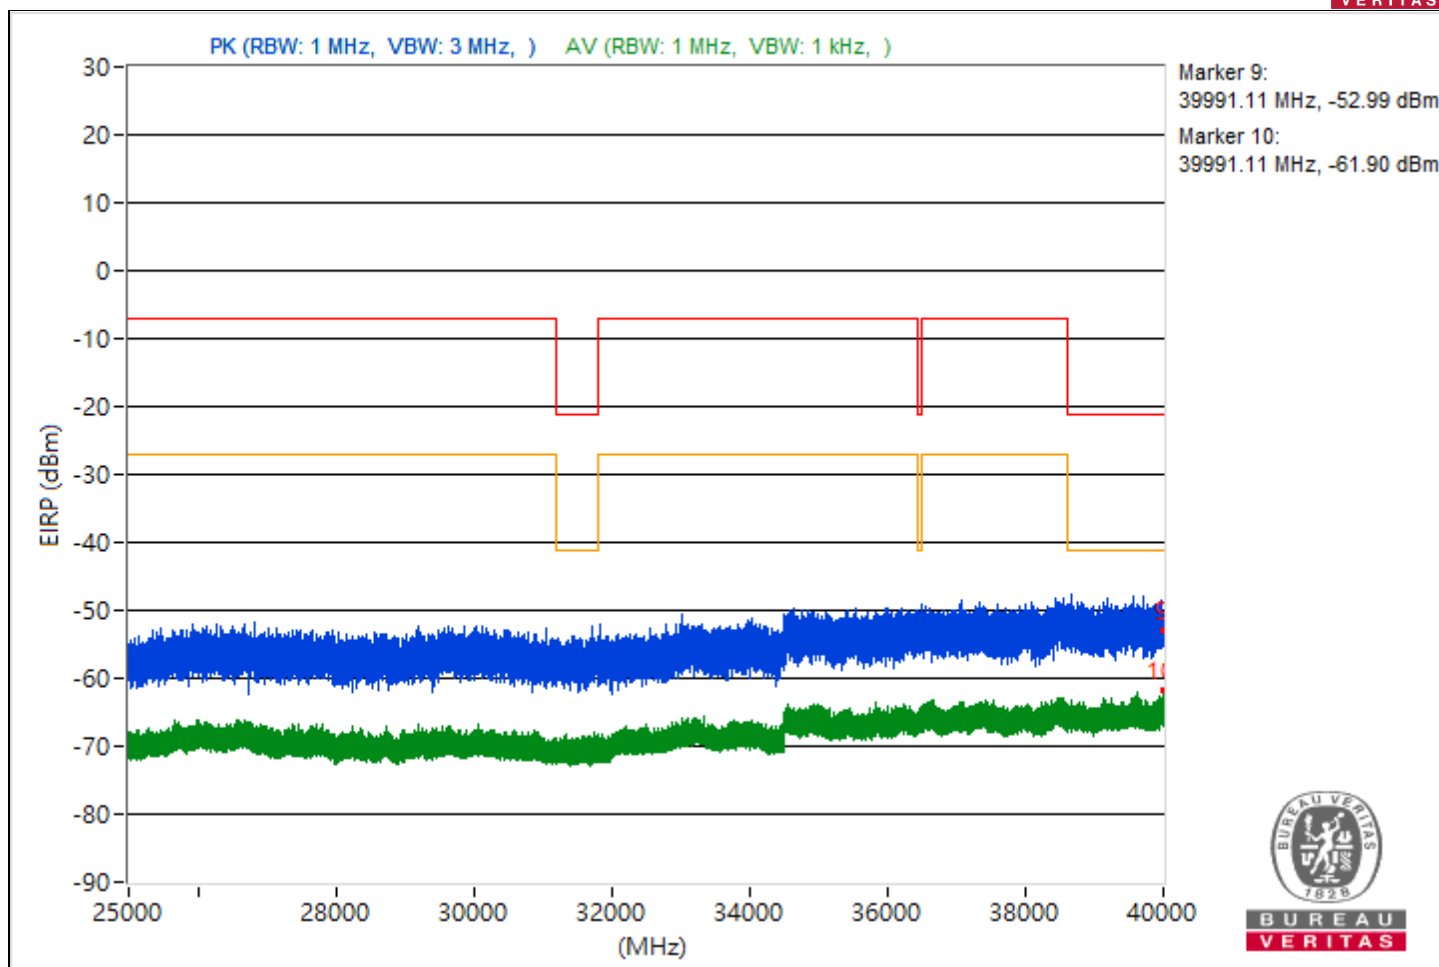


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5120.59	56.34 PK	74	-17.66	-52.3	-48.64	8.17	-38.92
2	5120.59	34.88 AV	54	-19.12	-74.08	-69.98	8.17	-60.38
3	11930.04	54.86 PK	74	-19.14	-51.17	-52.03	8.17	-40.4
4	11930.04	35.66 AV	54	-18.34	-76.19	-68.45	8.17	-59.6
5	19167.4	55.76 PK	74	-18.24	-49.79	-51.8	8.17	-39.5
6	19167.4	36.35 AV	54	-17.65	-71.64	-68.96	8.17	-58.91
7	23806.8	60.73 PK	74	-13.27	-46	-45.43	8.17	-34.53
8	23806.8	37.53 AV	54	-16.47	-67.65	-70.68	8.17	-57.73
9	39991.38	40.47 PK	74	-33.53	-66.29	-65.68	8.17	-54.79
10	39991.38	32.66 AV	54	-21.34	-76.59	-72.09	8.17	-62.6

Note: Margin value = Emission Level - Limit value

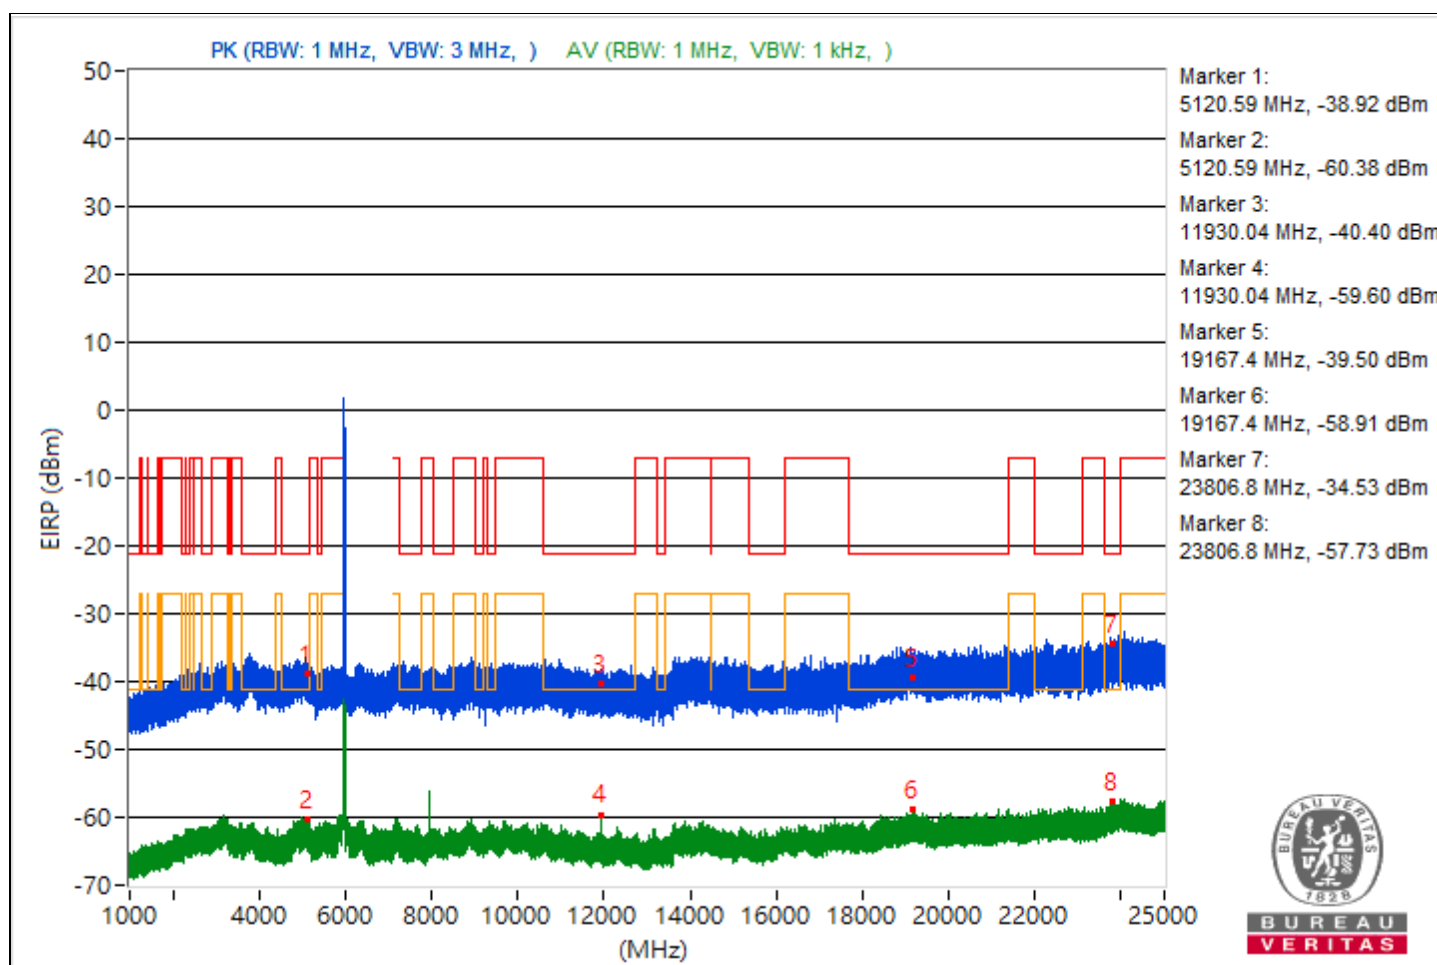


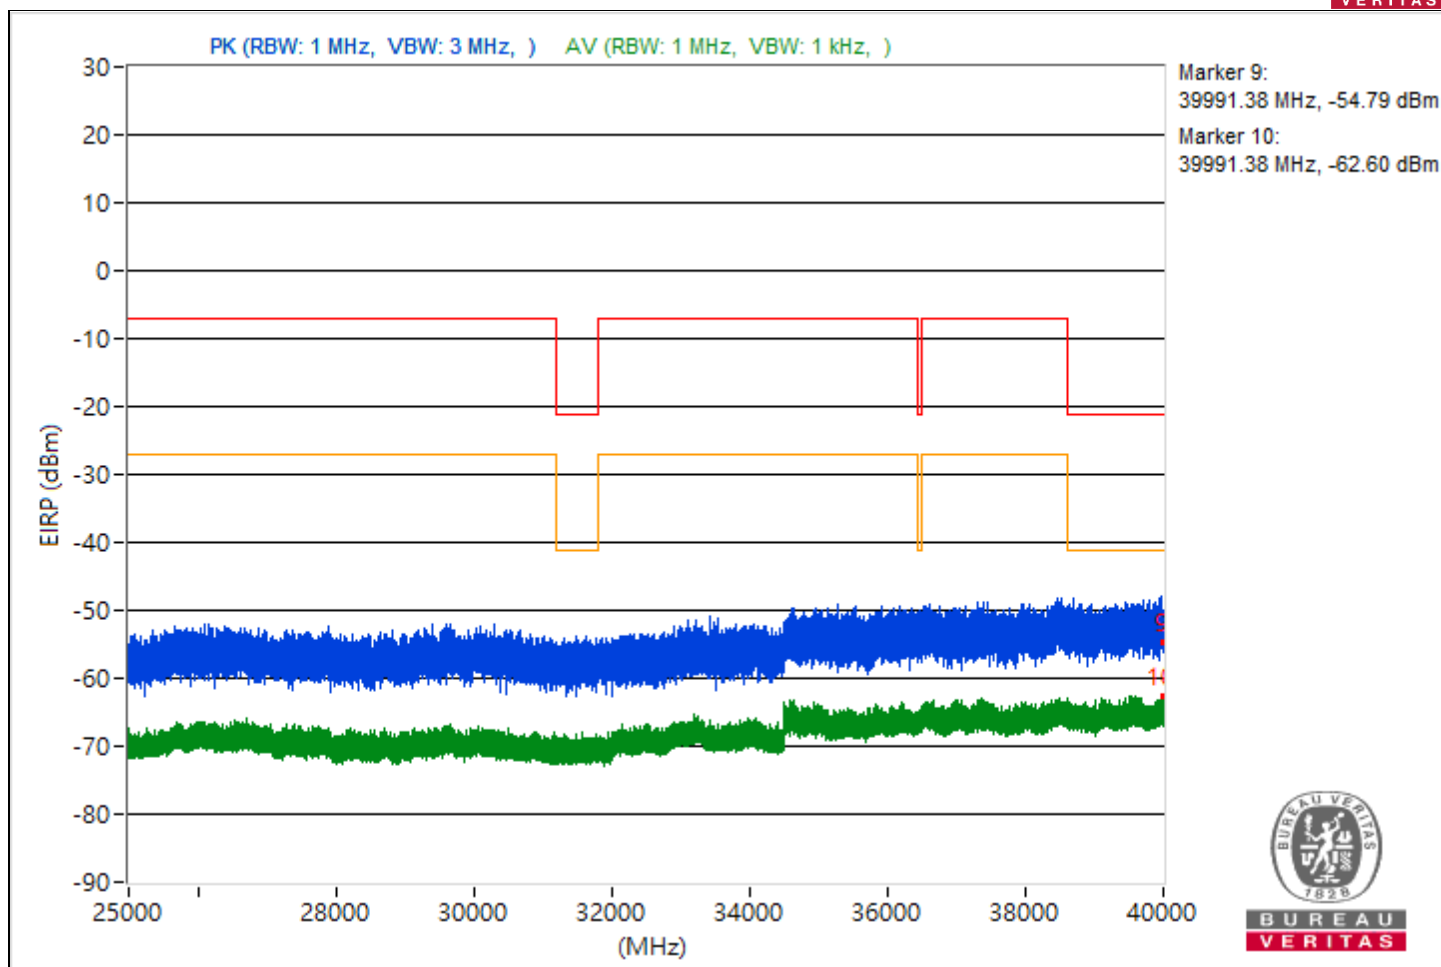


RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3781.49	55.49 PK	74	-18.51	-51.06	-50.84	8.17	-39.77
2	3781.49	34.48 AV	54	-19.52	-70.57	-74	8.17	-60.78
3	10603.02	54.39 PK	74	-19.61	-53.56	-50.93	8.17	-40.87
4	10603.02	34.25 AV	54	-19.75	-75.02	-70.5	8.17	-61.01
5	20516.7	58.7 PK	74	-15.3	-51.56	-45.74	8.17	-36.56
6	20516.7	35.91 AV	54	-18.09	-69.11	-72.66	8.17	-59.35
7	23873.7	57.94 PK	74	-16.06	-50.62	-47.07	8.17	-37.32
8	23873.7	37.26 AV	54	-16.74	-67.65	-71.56	8.17	-58
9	39942.58	46.24 PK	74	-27.76	-63.41	-58.37	8.17	-49.02
10	39942.58	32.46 AV	54	-21.54	-76.6	-72.36	8.17	-62.8

Note: Margin value = Emission Level - Limit value

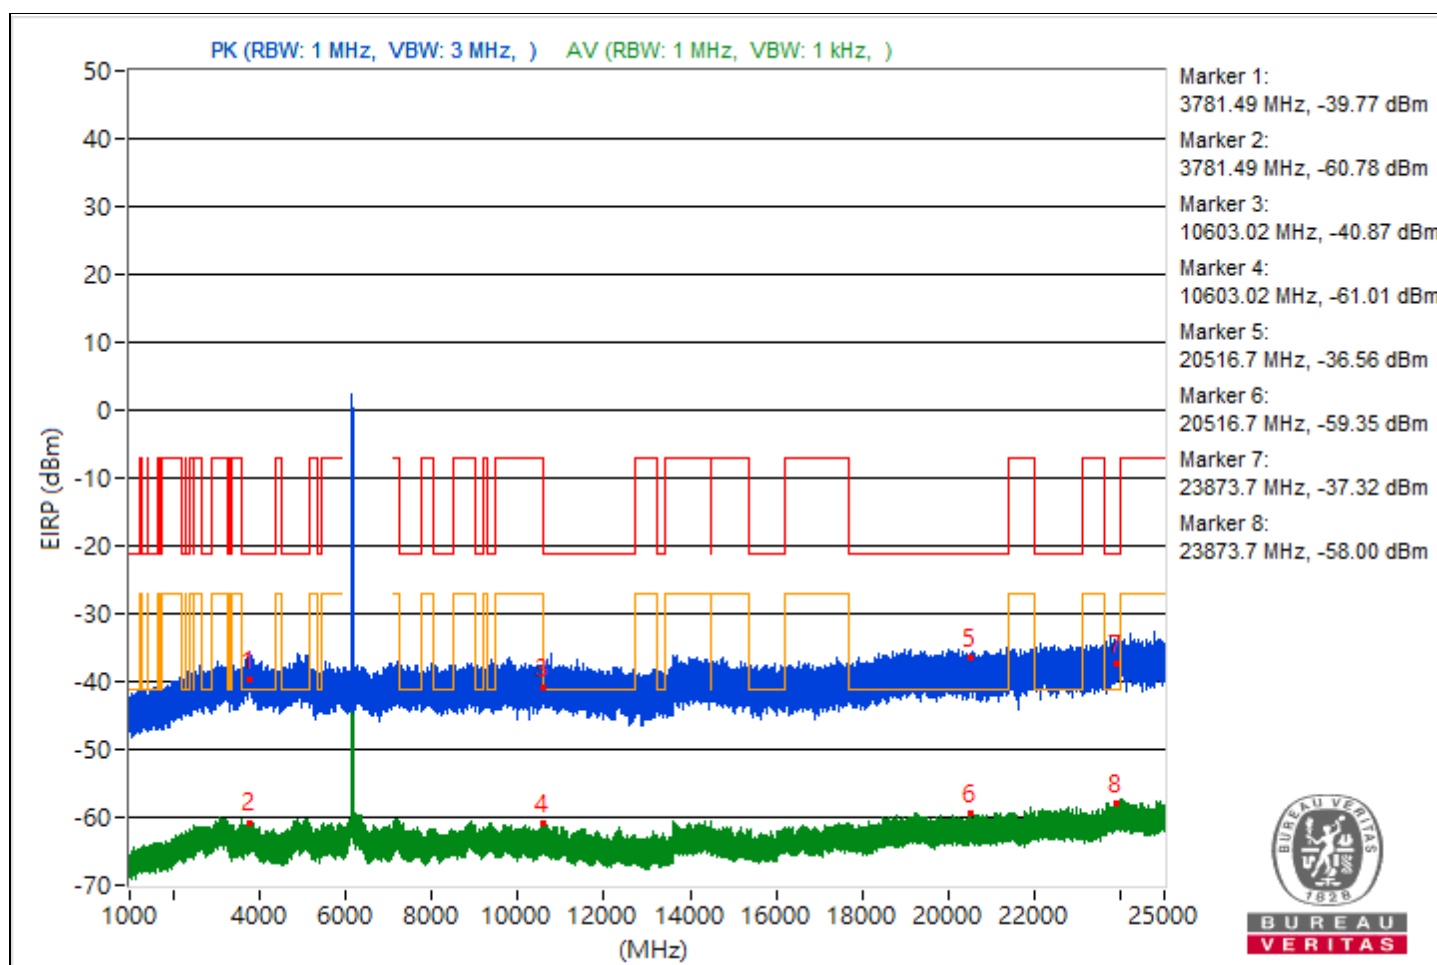


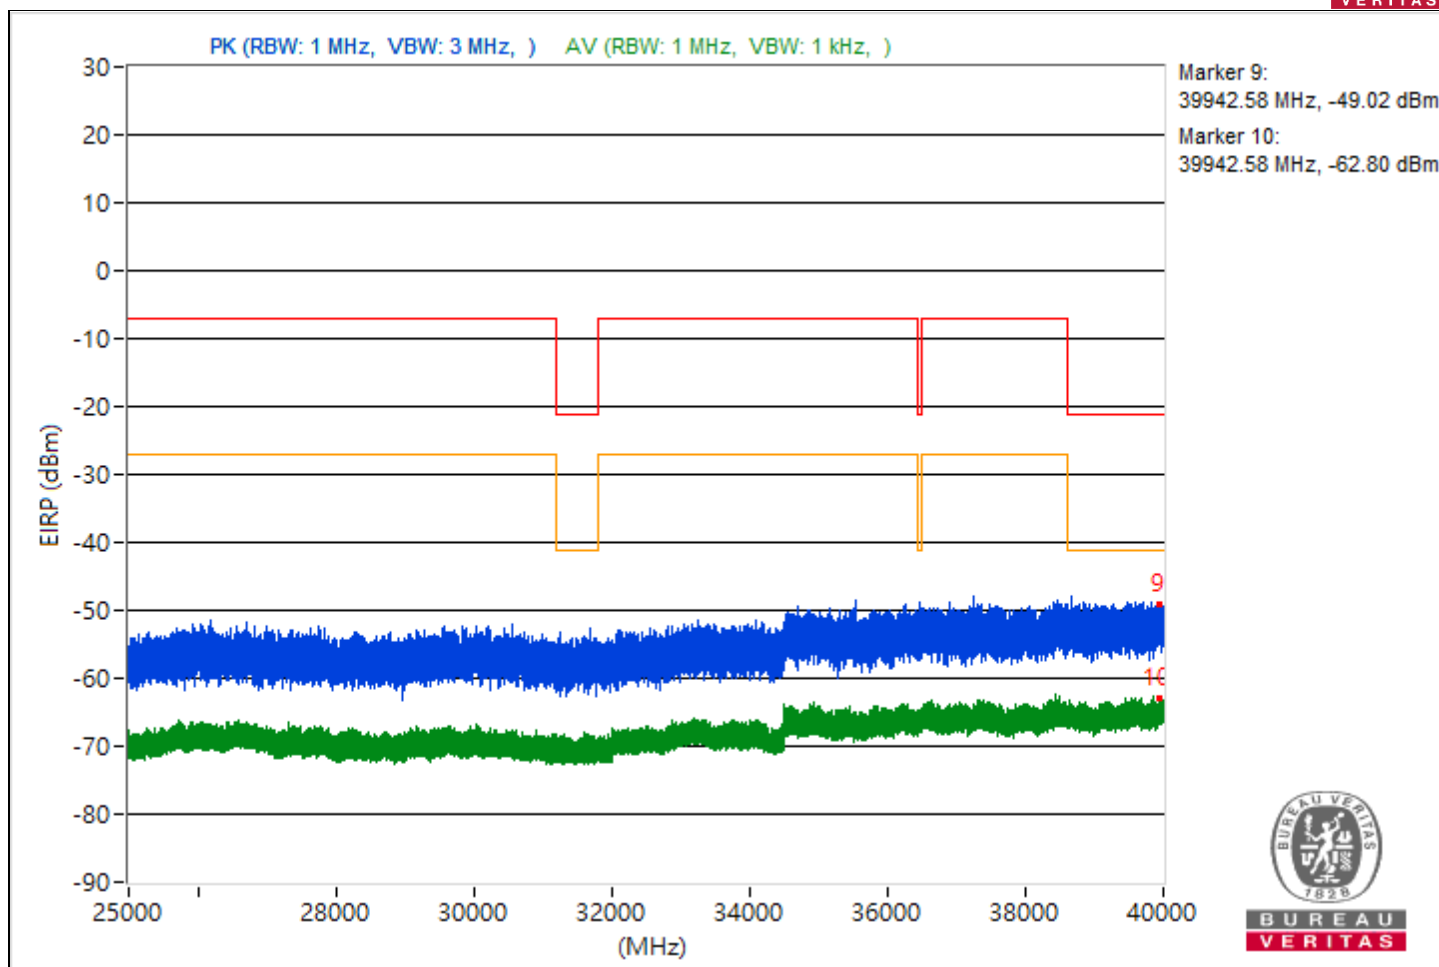


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4901.1	55.66 PK	74	-18.34	-52.24	-49.69	8.17	-39.6
2	4901.1	35.1 AV	54	-18.9	-70.74	-72.04	8.17	-60.16
3	9379.82	56.23 PK	74	-17.77	-50.58	-49.88	8.17	-39.03
4	9379.82	34.32 AV	54	-19.68	-74.2	-70.72	8.17	-60.94
5	21339.1	55.77 PK	74	-18.23	-51.16	-50.24	8.17	-39.49
6	21339.1	36.54 AV	54	-17.46	-71.75	-68.61	8.17	-58.72
7	23800.5	58.65 PK	74	-15.35	-46.45	-49.73	8.17	-36.61
8	23800.5	37.19 AV	54	-16.81	-72	-67.58	8.17	-58.07
9	39506.58	40.23 PK	74	-33.77	-65.86	-66.59	8.17	-55.03
10	39506.58	32.11 AV	54	-21.89	-72.73	-76.91	8.17	-63.15

Note: Margin value = Emission Level - Limit value

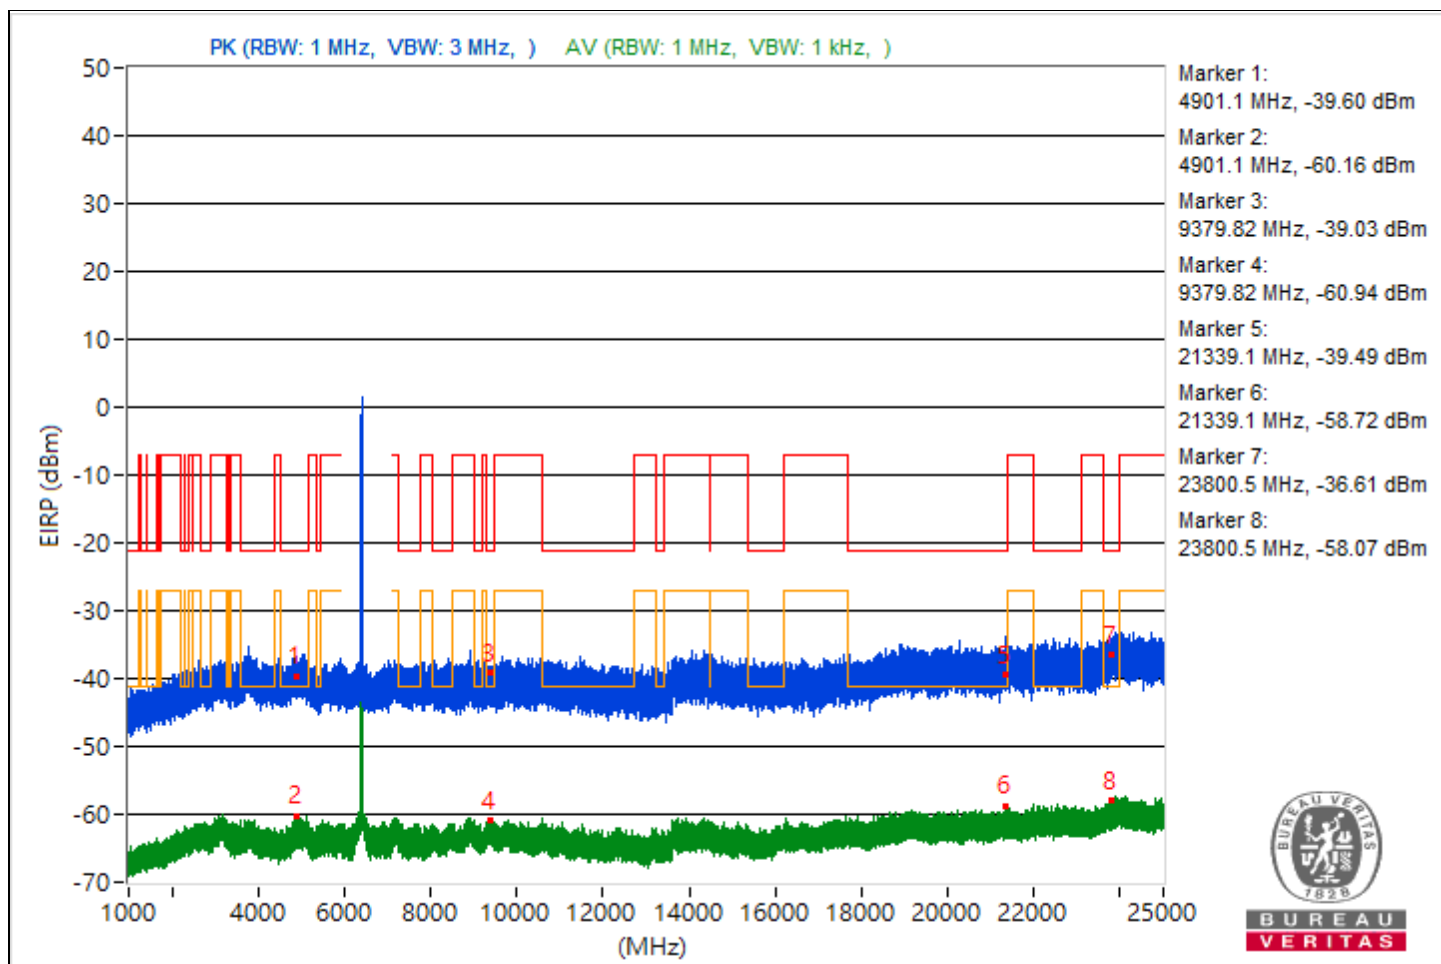


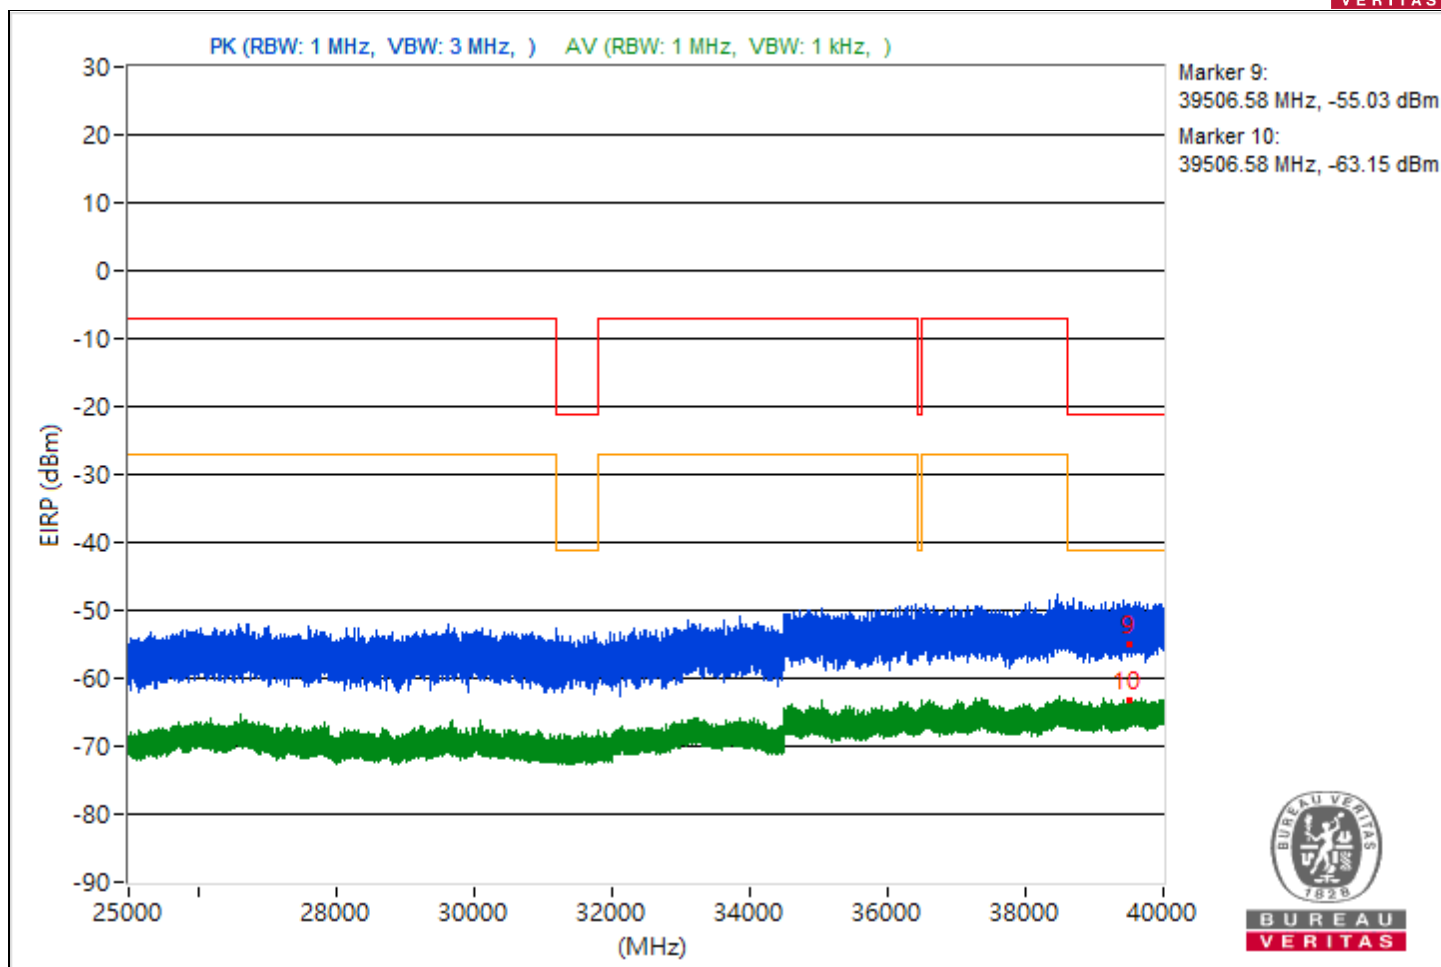


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5091.5	55.4 PK	74	-18.6	-51.01	-51.07	8.17	-39.86
2	5091.5	34.49 AV	54	-19.51	-74.59	-70.32	8.17	-60.77
3	10618.13	55.91 PK	74	-18.09	-51.72	-49.59	8.17	-39.35
4	10618.13	34.52 AV	54	-19.48	-70.85	-73.35	8.17	-60.74
5	21348.9	56.49 PK	74	-17.51	-49.94	-49.97	8.17	-38.77
6	21348.9	35.65 AV	54	-18.35	-72.91	-69.37	8.17	-59.61
7	23940.3	57.51 PK	74	-16.49	-48.56	-49.34	8.17	-37.75
8	23940.3	37.72 AV	54	-16.28	-66.95	-71.74	8.17	-57.54
9	39641.16	43.34 PK	74	-30.66	-64.02	-62.34	8.17	-51.92
10	39641.16	32.04 AV	54	-21.96	-72.75	-77.08	8.17	-63.22

Note: Margin value = Emission Level - Limit value

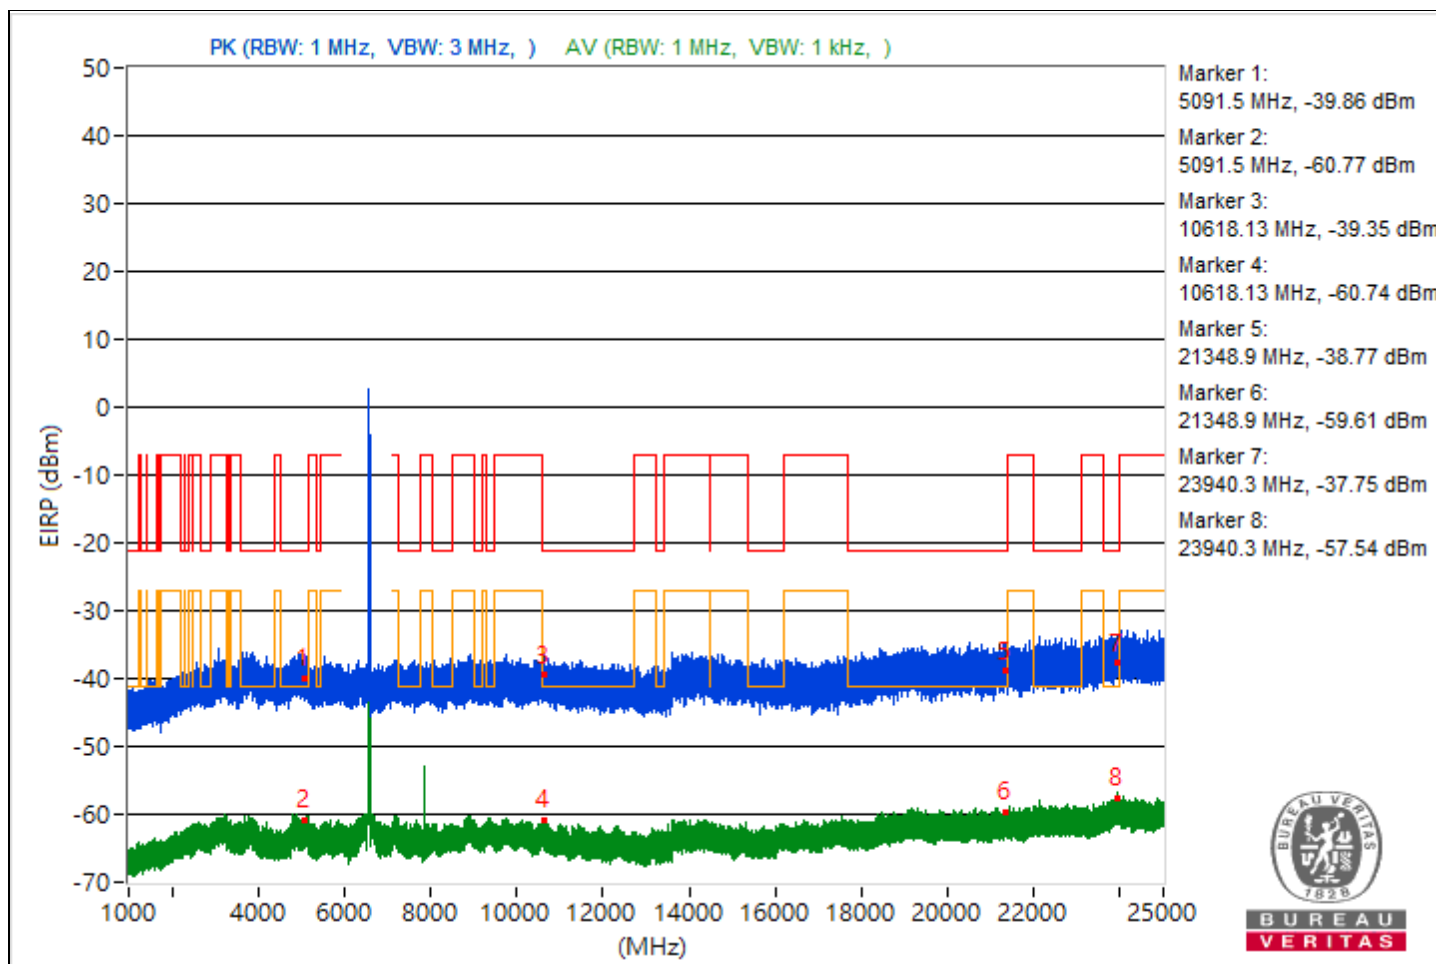


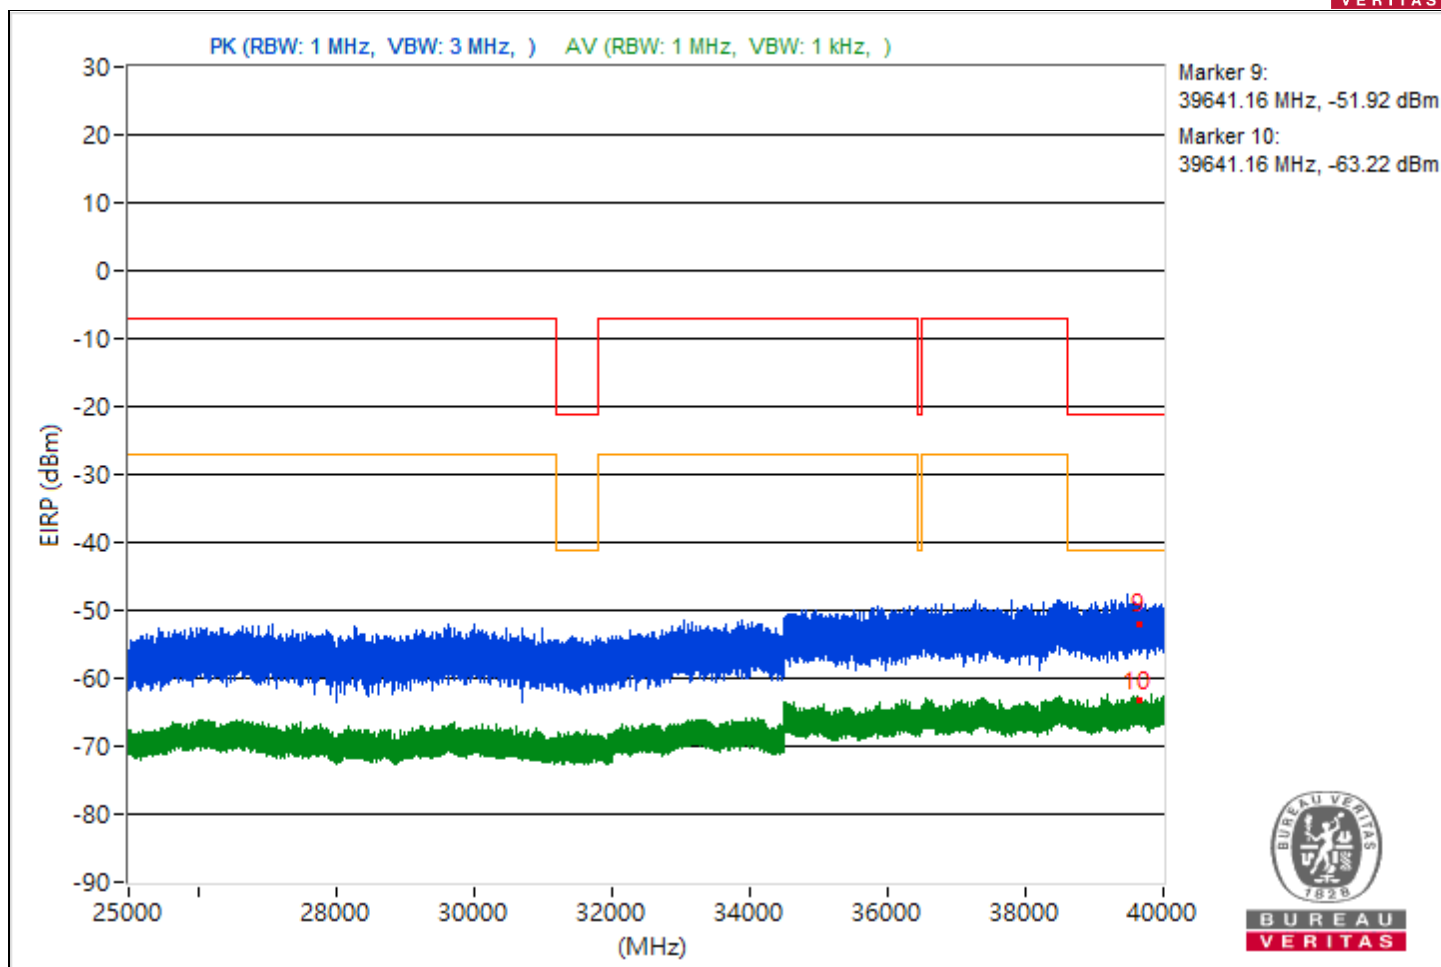


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5102.47	54.84 PK	74	-19.16	-52.15	-51.12	8.17	-40.42
2	5102.47	34.7 AV	54	-19.3	-70.22	-74.11	8.17	-60.56
3	7253.41	55.52 PK	74	-18.48	-50.35	-51.58	8.17	-39.74
4	7253.41	34.5 AV	54	-19.5	-73.34	-70.89	8.17	-60.76
5	19110.7	56.74 PK	74	-17.26	-49.09	-50.41	8.17	-38.52
6	19110.7	35.91 AV	54	-18.09	-73.19	-68.89	8.17	-59.35
7	23832.9	56.26 PK	74	-17.74	-50.04	-50.33	8.17	-39
8	23832.9	37.28 AV	54	-16.72	-72.86	-67.2	8.17	-57.98
9	39578.04	42.06 PK	74	-31.94	-64.25	-64.52	8.17	-53.2
10	39578.04	32.72 AV	54	-21.28	-72.38	-75.68	8.17	-62.54

Note: Margin value = Emission Level - Limit value

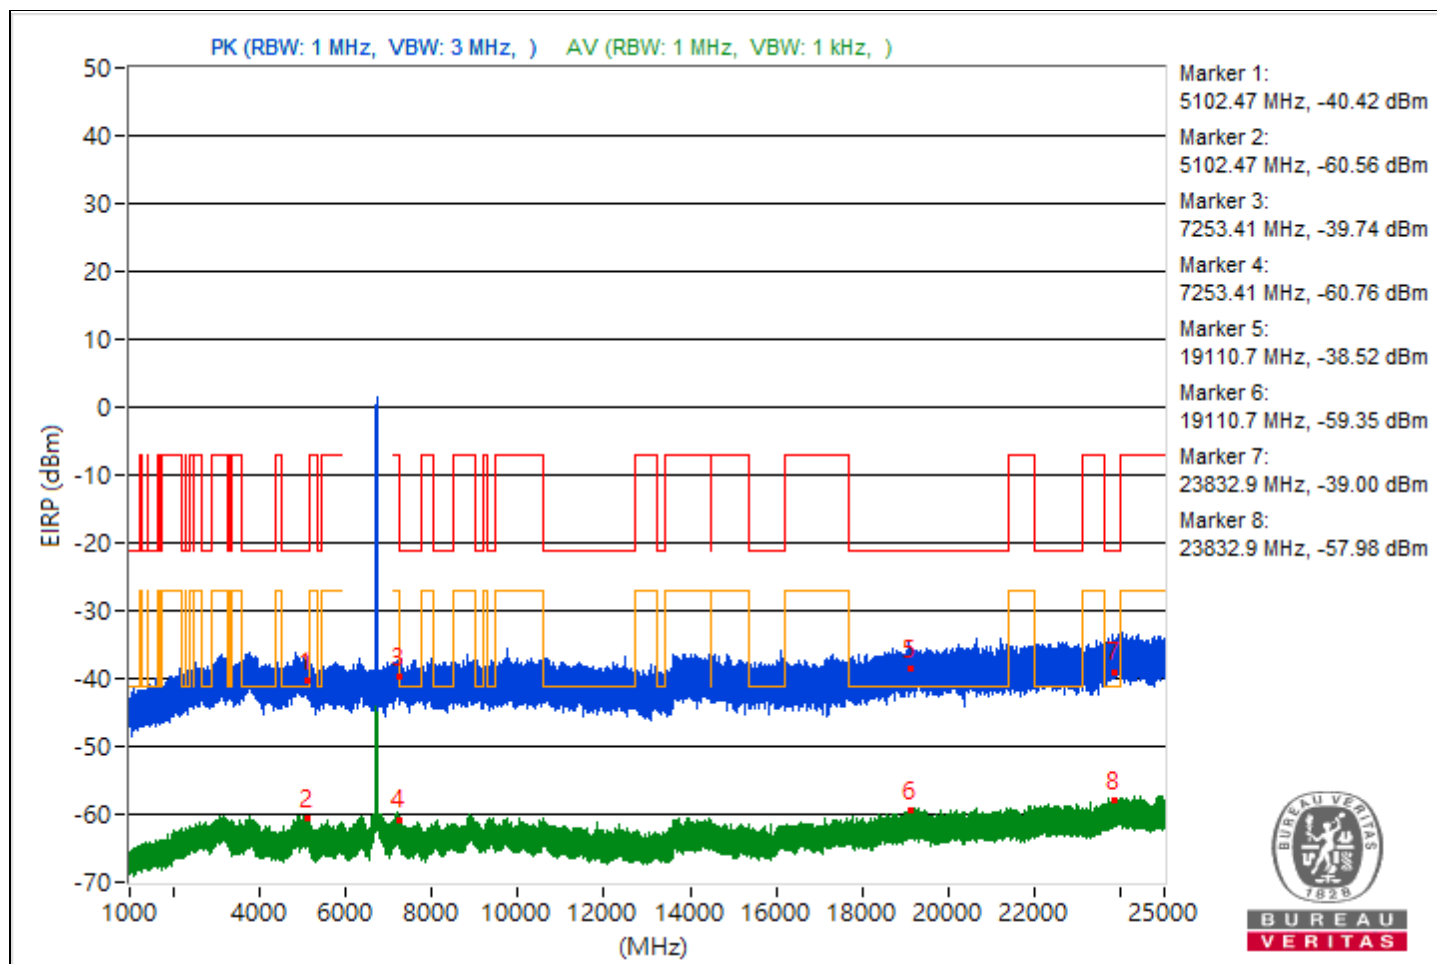


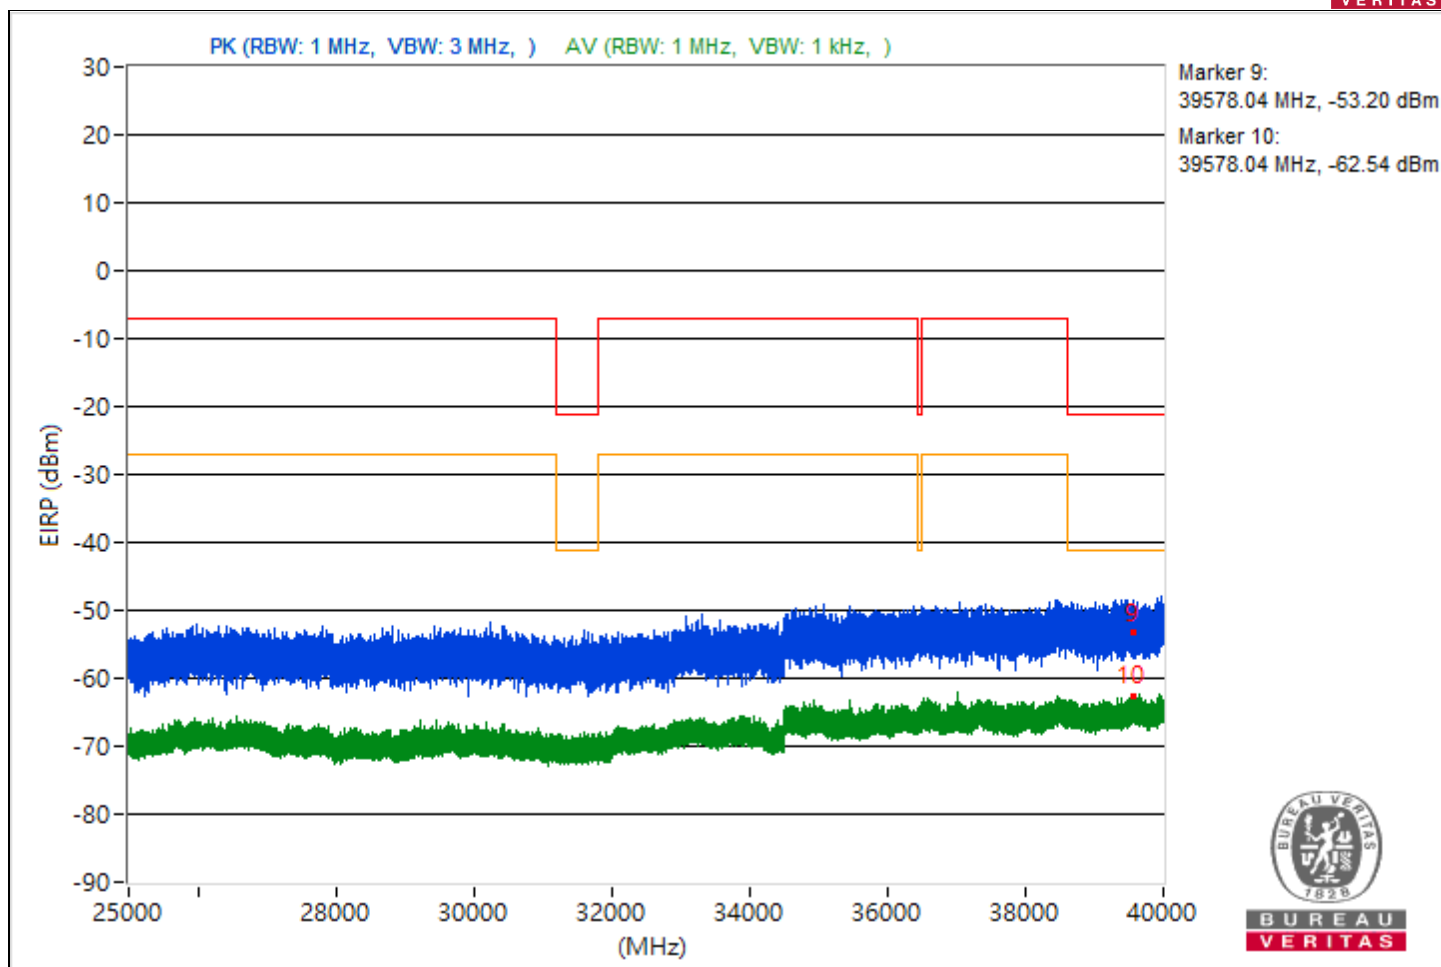


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3770.76	54.6 PK	74	-19.4	-52.48	-51.29	8.17	-40.66
2	3770.76	34.79 AV	54	-19.21	-73.02	-70.62	8.17	-60.47
3	9390.84	55.15 PK	74	-18.85	-51.44	-51.15	8.17	-40.11
4	9390.84	34.36 AV	54	-19.64	-70.87	-73.74	8.17	-60.9
5	20136.9	55.95 PK	74	-18.05	-51.88	-49.44	8.17	-39.31
6	20136.9	35.46 AV	54	-18.54	-69.3	-73.78	8.17	-59.8
7	23895.3	57.92 PK	74	-16.08	-49.54	-47.69	8.17	-37.34
8	23895.3	37.39 AV	54	-16.61	-67.7	-71.04	8.17	-57.87
9	39603.82	43.46 PK	74	-30.54	-64.2	-62.03	8.17	-51.8
10	39603.82	32.37 AV	54	-21.63	-72.87	-75.73	8.17	-62.89

Note: Margin value = Emission Level - Limit value

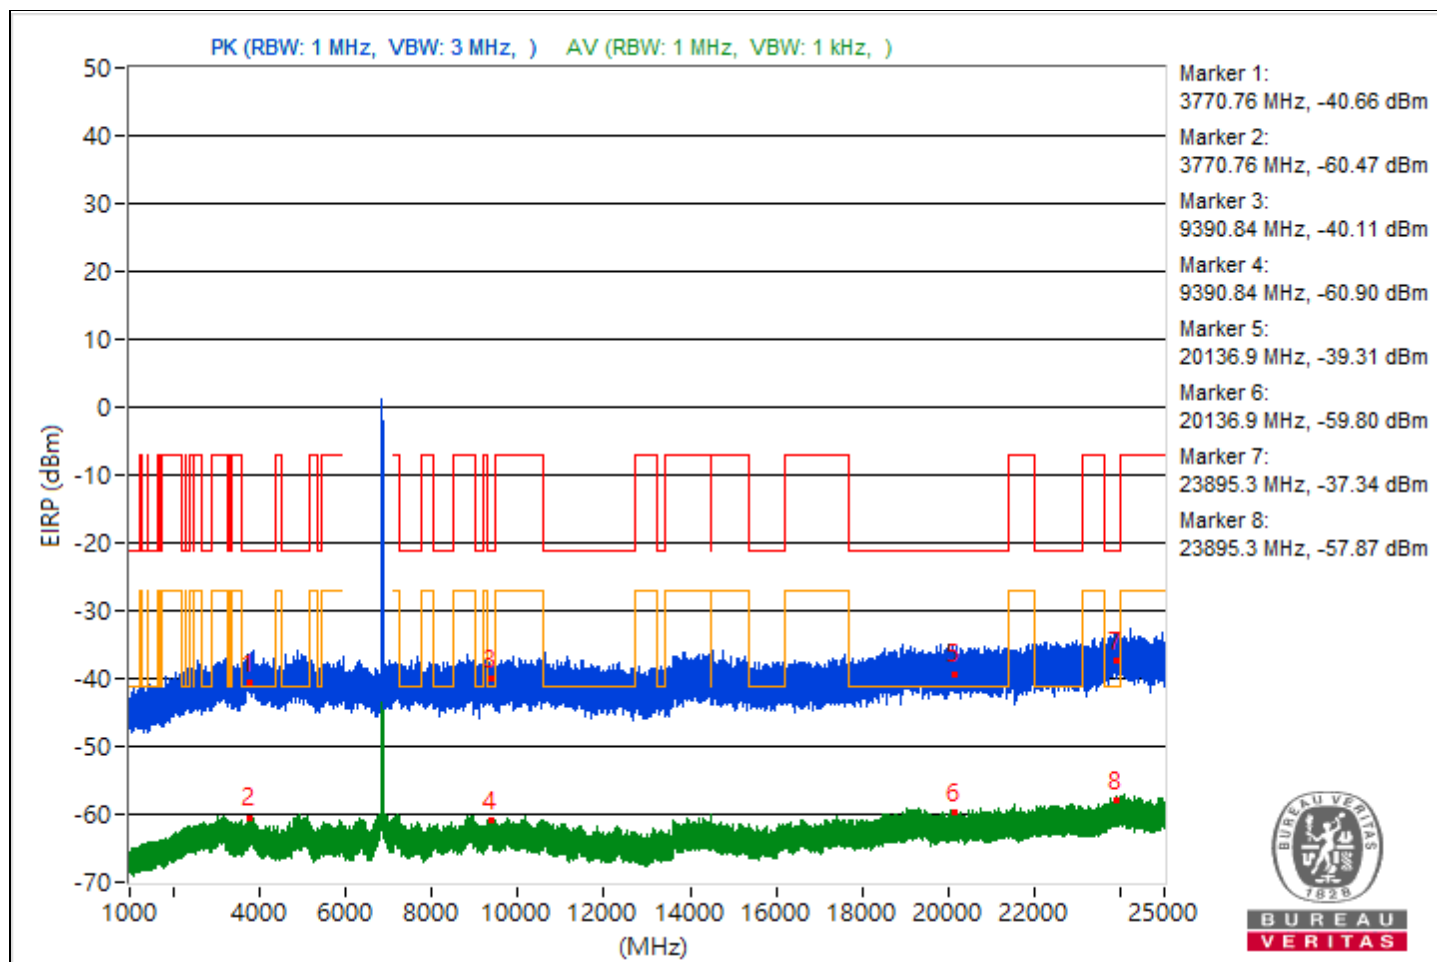


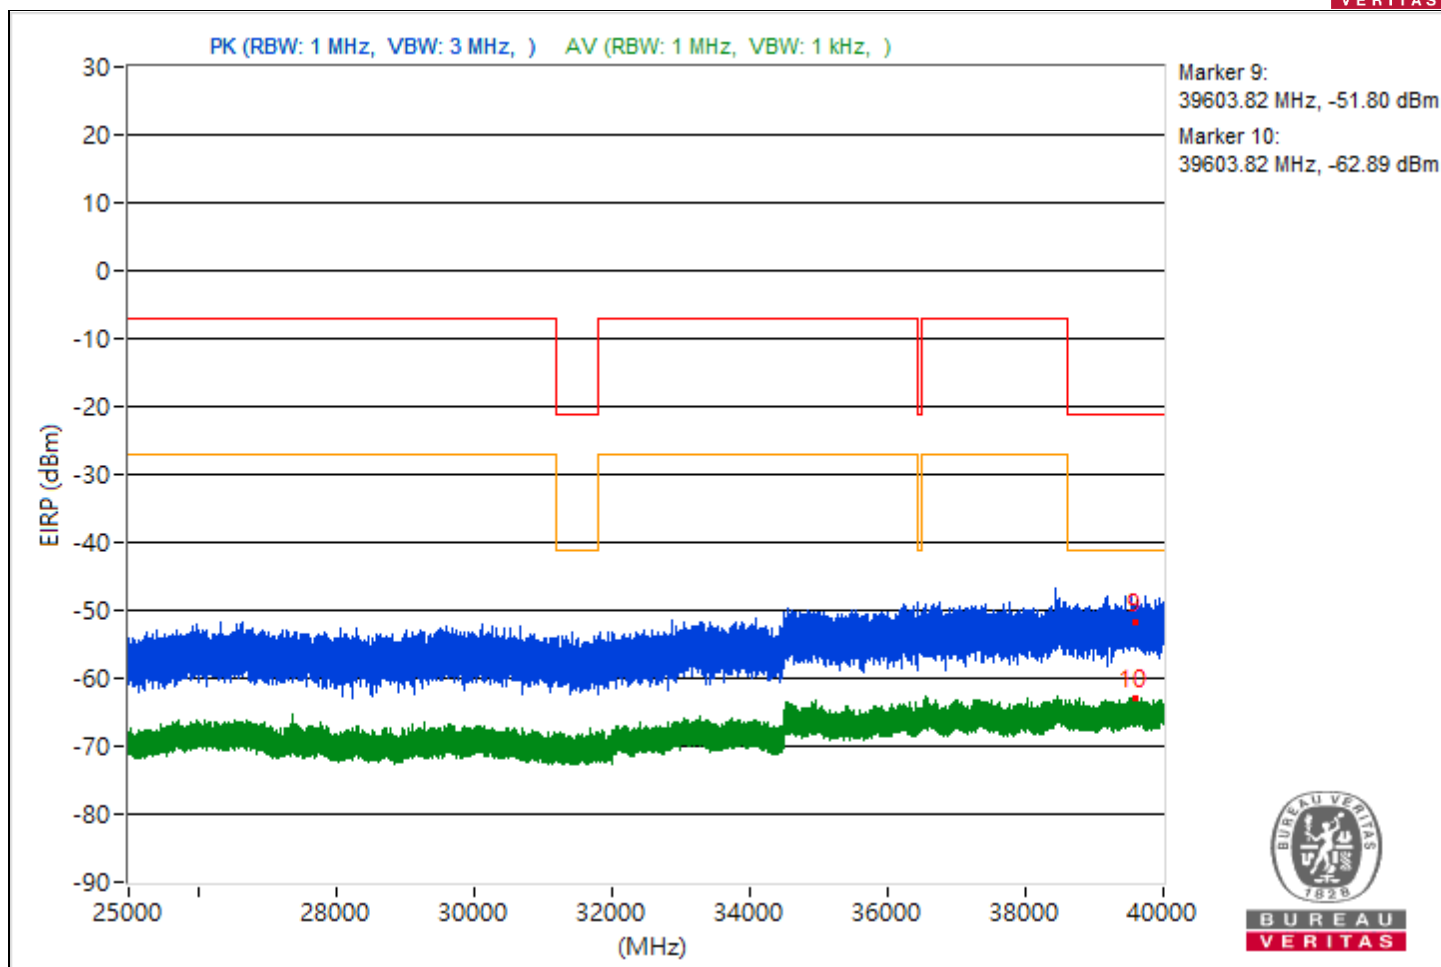


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5113.67	55.33 PK	74	-18.67	-49.98	-52.64	8.17	-39.93
2	5113.67	34.87 AV	54	-19.13	-74.65	-69.78	8.17	-60.39
3	11970.31	54.34 PK	74	-19.66	-53.73	-50.92	8.17	-40.92
4	11970.31	35.6 AV	54	-18.4	-74.58	-68.86	8.17	-59.66
5	19958.3	56.9 PK	74	-17.1	-48.98	-50.18	8.17	-38.36
6	19958.3	35.8 AV	54	-18.2	-69.08	-73.09	8.17	-59.46
7	23756.9	59.01 PK	74	-14.99	-47.83	-47.06	8.17	-36.25
8	23756.9	37.58 AV	54	-16.42	-70.29	-67.78	8.17	-57.68
9	39550.67	40.68 PK	74	-33.32	-65.02	-66.65	8.17	-54.58
10	39550.67	32.28 AV	54	-21.72	-72.18	-77.92	8.17	-62.98

Note: Margin value = Emission Level - Limit value

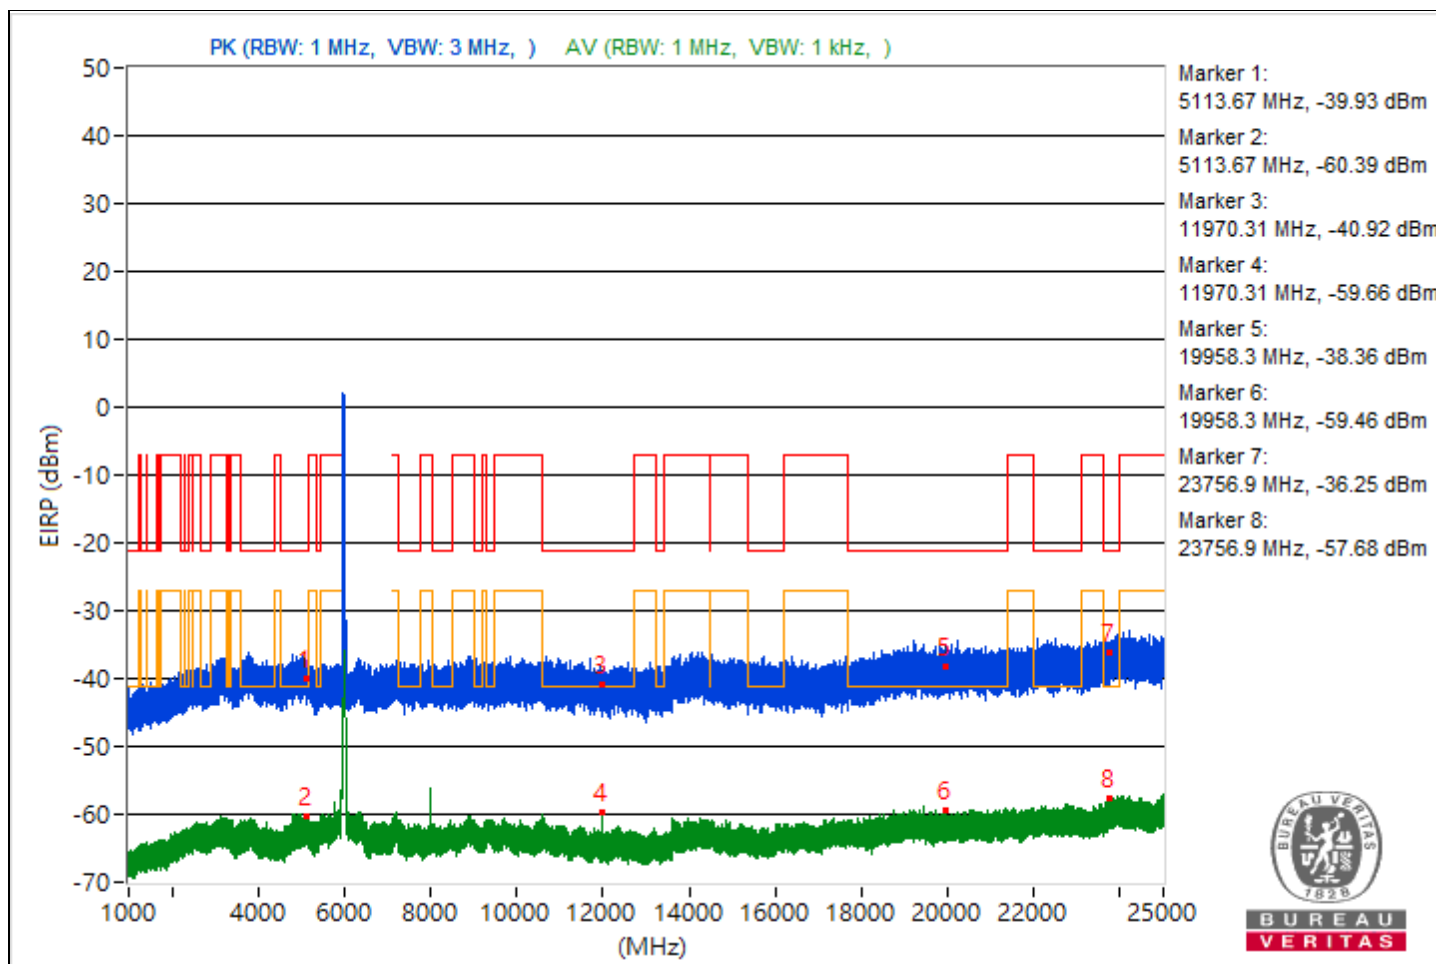


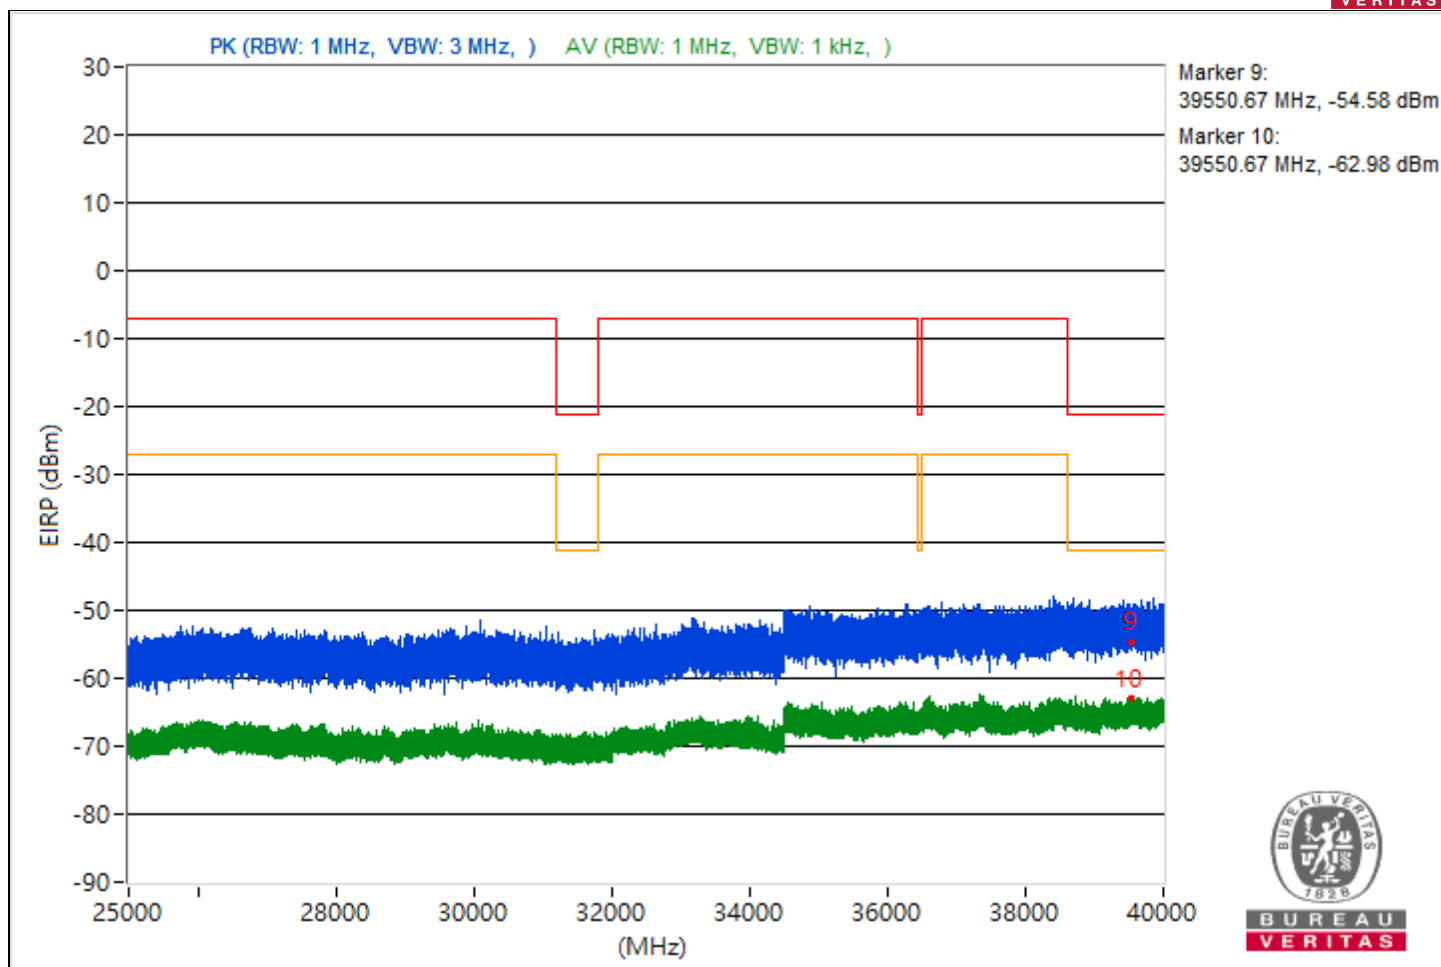


RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4905.46	55.34 PK	74	-18.66	-52.75	-49.91	8.17	-39.92
2	4905.46	35.11 AV	54	-18.89	-73.66	-69.82	8.17	-60.15
3	10630.76	56.9 PK	74	-17.1	-51.05	-48.43	8.17	-38.36
4	10630.76	35.02 AV	54	-18.98	-72	-70.91	8.17	-60.24
5	19247.9	56.98 PK	74	-17.02	-49.47	-49.44	8.17	-38.28
6	19247.9	35.81 AV	54	-18.19	-69.23	-72.69	8.17	-59.45
7	23860.5	57.21 PK	74	-16.79	-48.49	-50.11	8.17	-38.05
8	23860.5	37.65 AV	54	-16.35	-67.39	-70.86	8.17	-57.61
9	39527.73	42.22 PK	74	-31.78	-66.92	-62.56	8.17	-53.04
10	39527.73	32.3 AV	54	-21.7	-72.82	-76.06	8.17	-62.96

Note: Margin value = Emission Level - Limit value

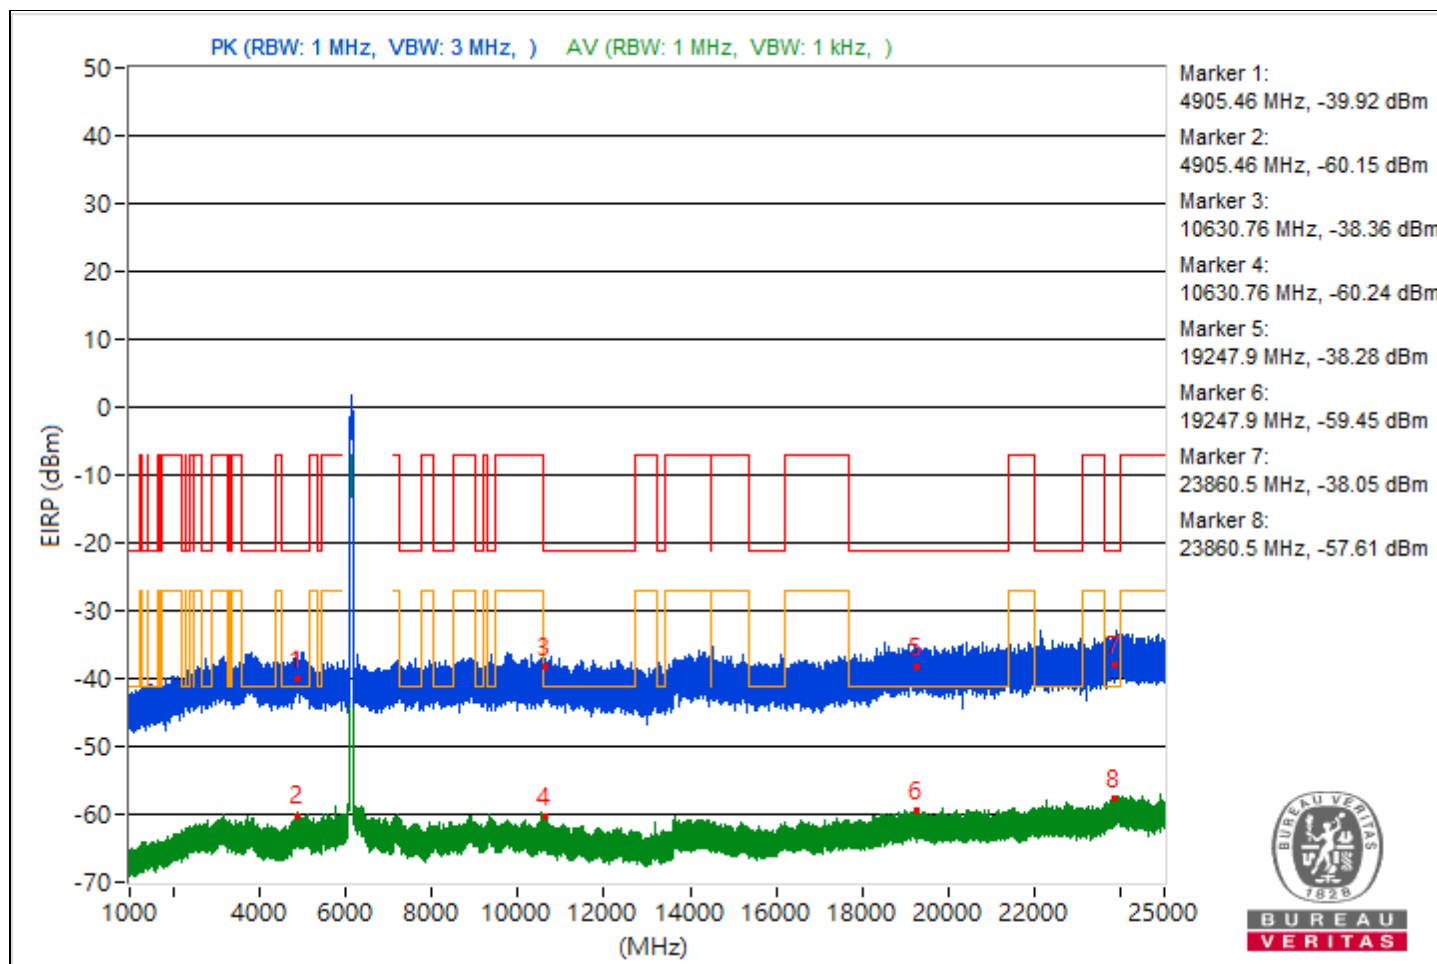


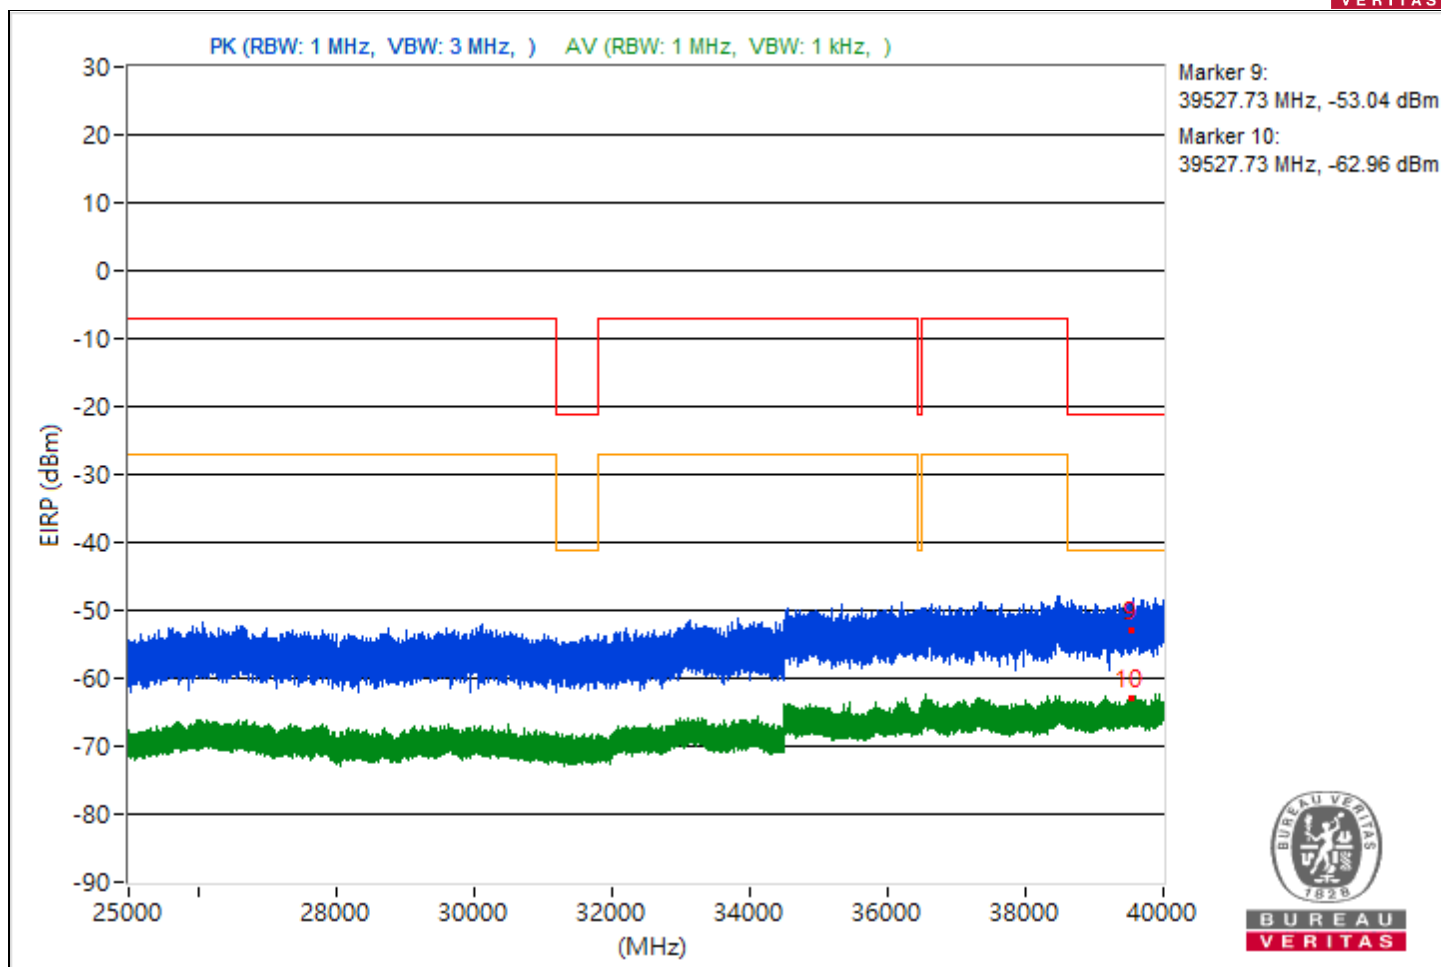


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4898.92	56.61 PK	74	-17.39	-48.7	-51.36	8.17	-38.65
2	4898.92	35.94 AV	54	-18.06	-72.25	-69.26	8.17	-59.32
3	7273.4	54.67 PK	74	-19.33	-51.14	-52.5	8.17	-40.59
4	7273.4	34.62 AV	54	-19.38	-70.41	-73.91	8.17	-60.64
5	19450.2	56.95 PK	74	-17.05	-50.31	-48.8	8.17	-38.31
6	19450.2	35.8 AV	54	-18.2	-69.19	-72.81	8.17	-59.46
7	23992	57.96 PK	74	-16.04	-47.21	-50.28	8.17	-37.3
8	23992	37.49 AV	54	-16.51	-70.9	-67.61	8.17	-57.77
9	39567.91	41.66 PK	74	-32.34	-63.22	-67.25	8.17	-53.6
10	39567.91	32.35 AV	54	-21.65	-72.19	-77.52	8.17	-62.91

Note: Margin value = Emission Level - Limit value

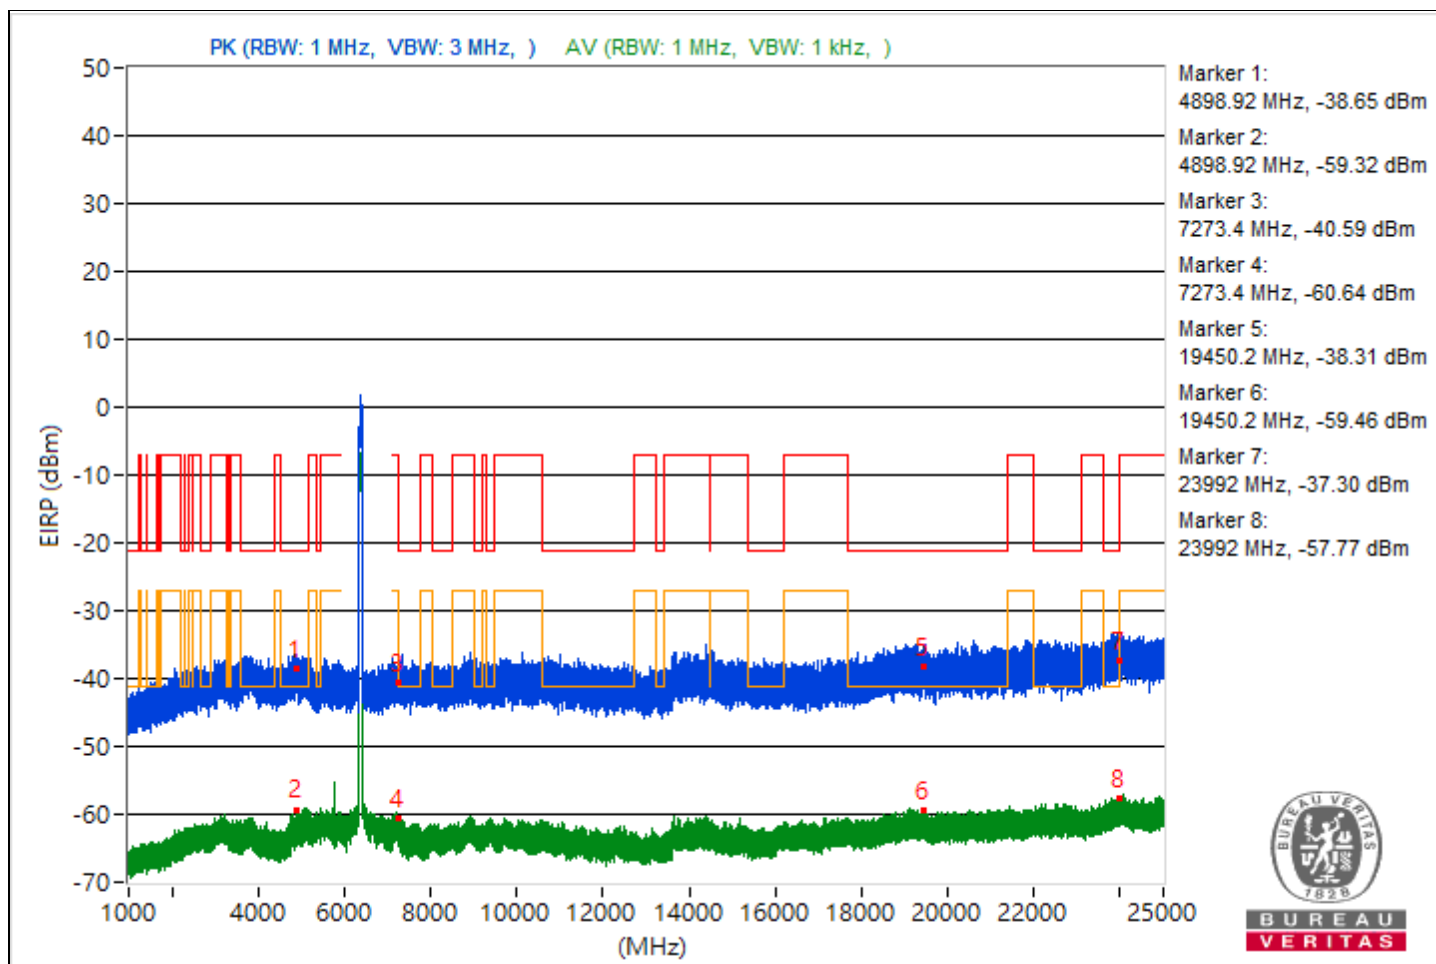


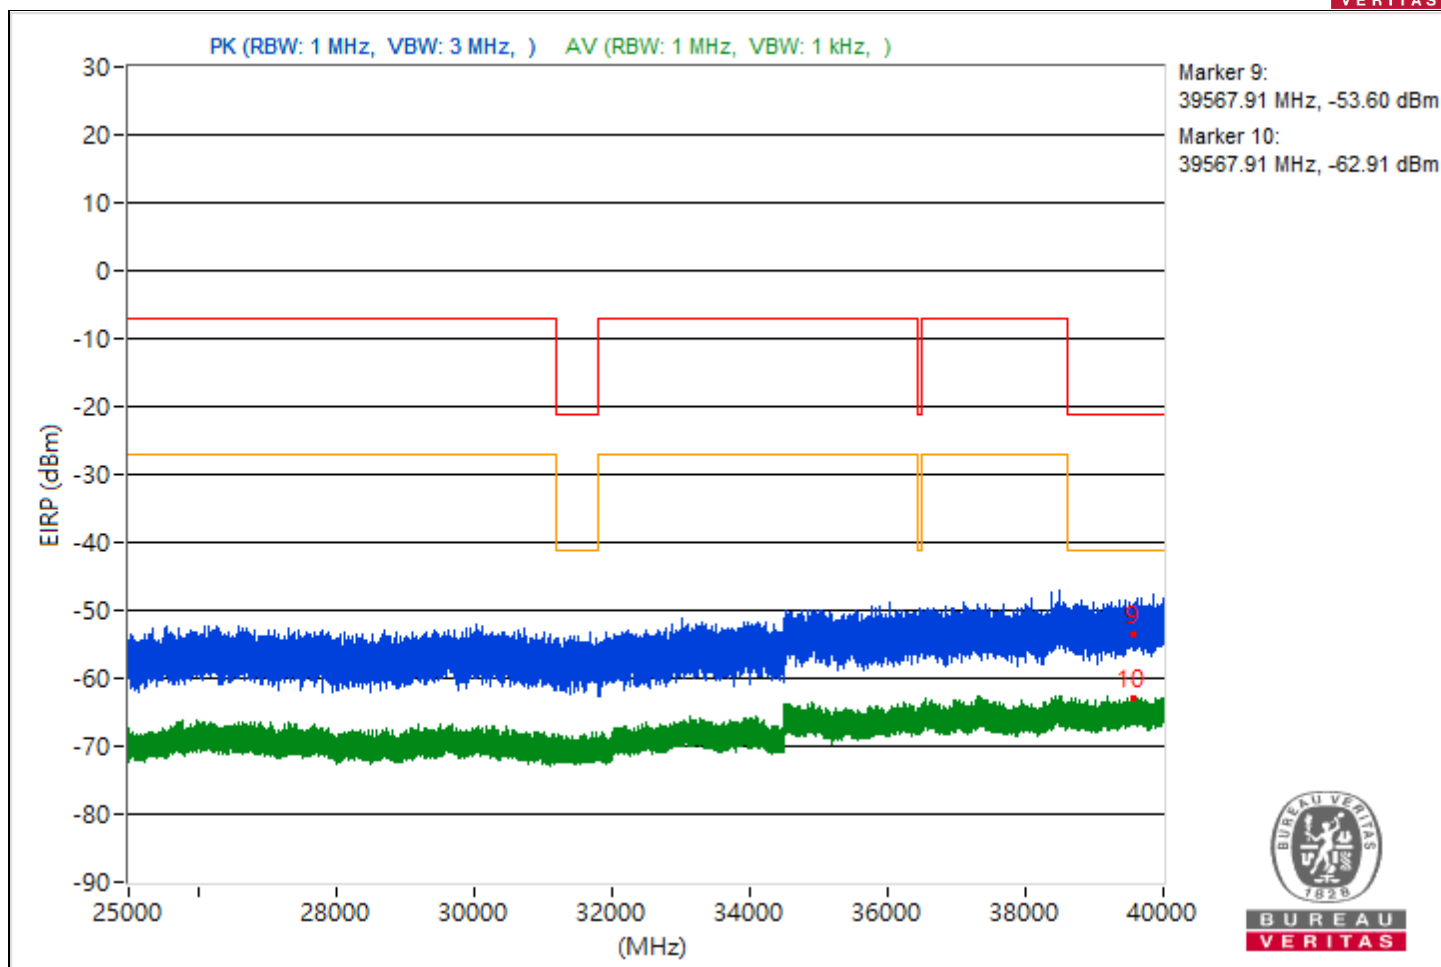


RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4895.81	56.82 PK	74	-17.18	-48.95	-50.41	8.17	-38.44
2	4895.81	35.7 AV	54	-18.3	-69.83	-71.9	8.17	-59.56
3	9353.87	54.78 PK	74	-19.22	-52.56	-50.91	8.17	-40.48
4	9353.87	34.63 AV	54	-19.37	-70.94	-72.91	8.17	-60.63
5	19334.9	55.38 PK	74	-18.62	-51.48	-50.68	8.17	-39.88
6	19334.9	36.13 AV	54	-17.87	-69.33	-71.59	8.17	-59.13
7	23976.3	57.09 PK	74	-16.91	-50.03	-48.75	8.17	-38.17
8	23976.3	37.41 AV	54	-16.59	-72	-67.28	8.17	-57.85
9	39539.82	42.22 PK	74	-31.78	-65.49	-63.24	8.17	-53.04
10	39539.82	32.44 AV	54	-21.56	-72.43	-76.47	8.17	-62.82

Note: Margin value = Emission Level - Limit value

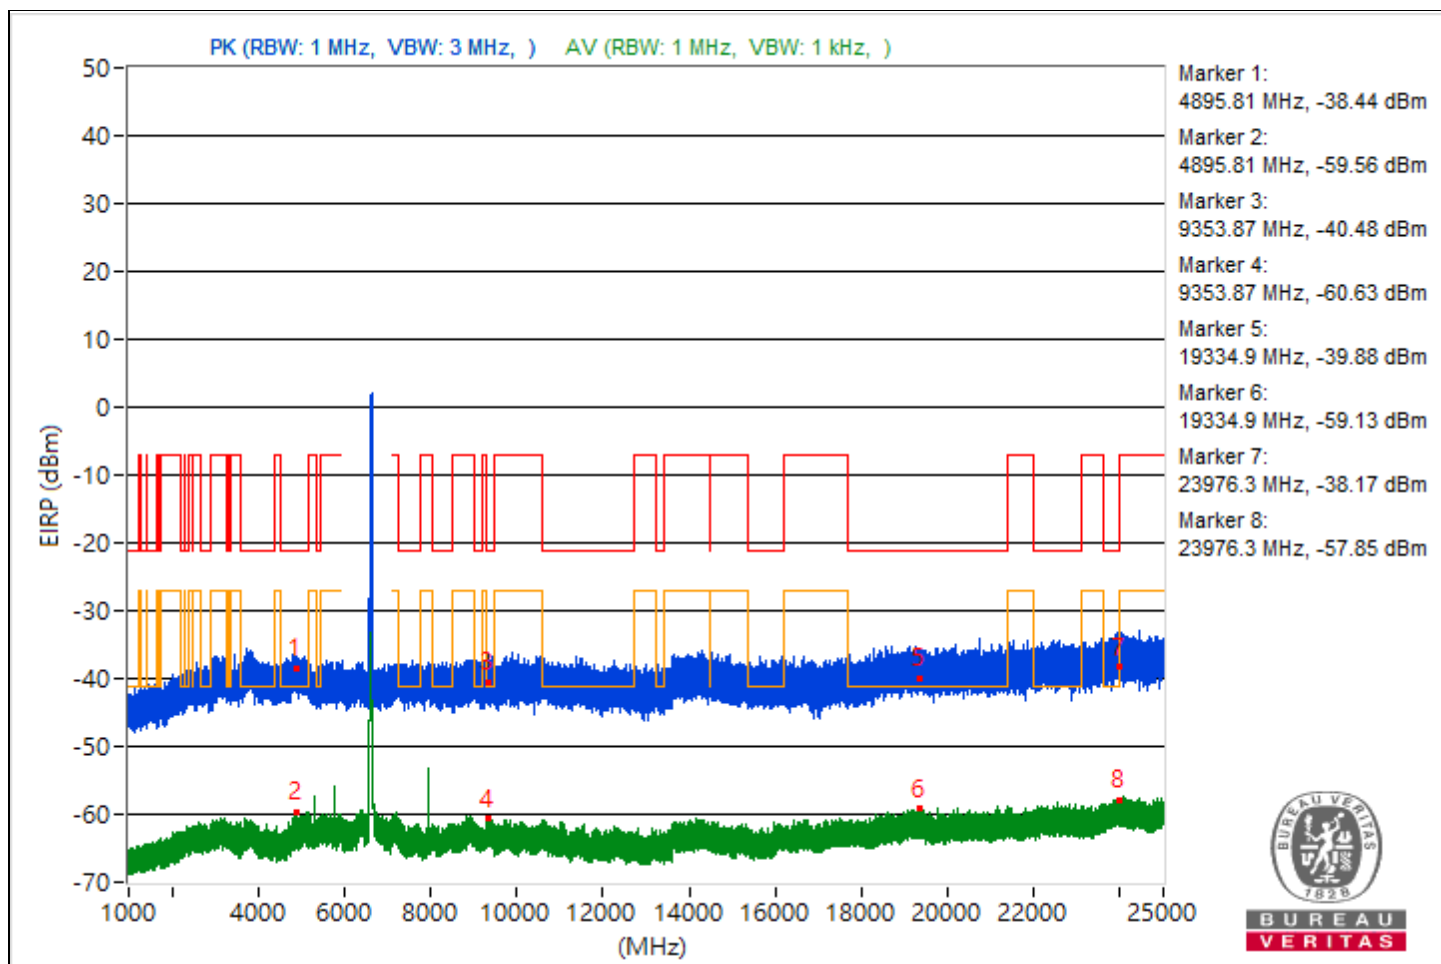

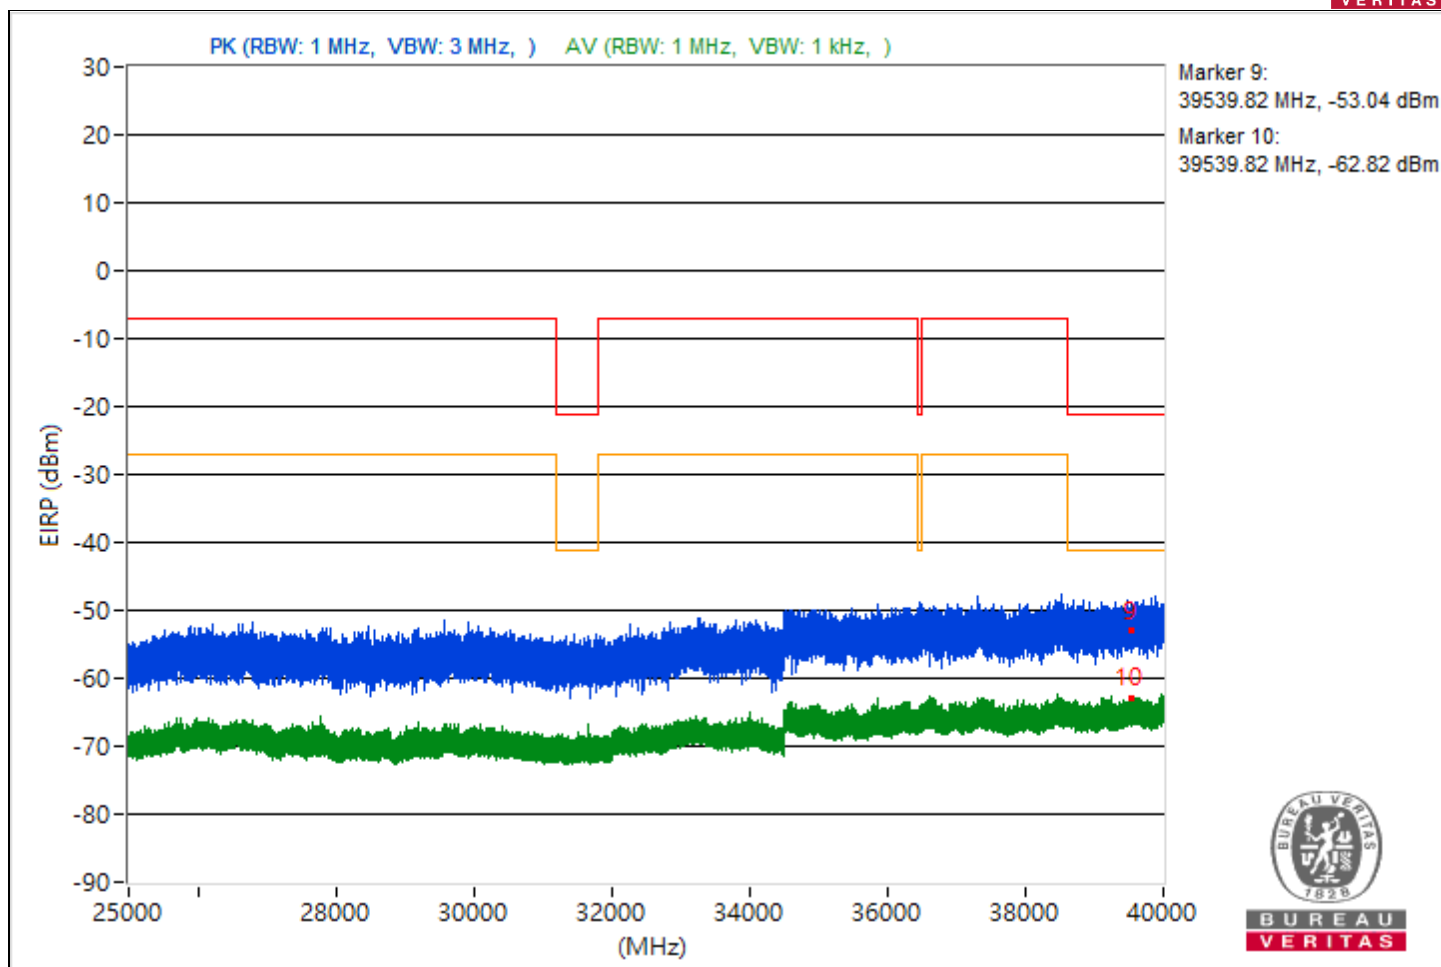

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5106.67	55.16 PK	74	-18.84	-50.89	-51.72	8.17	-40.1
2	5106.67	35.47 AV	54	-18.53	-73.39	-69.43	8.17	-59.79
3	7255.82	54.9 PK	74	-19.1	-52	-51.13	8.17	-40.36
4	7255.82	34.59 AV	54	-19.41	-70.56	-73.71	8.17	-60.67
5	21356.3	57.51 PK	74	-16.49	-48.51	-49.39	8.17	-37.75
6	21356.3	36.96 AV	54	-17.04	-68.42	-70.89	8.17	-58.3
7	23979.9	58.3 PK	74	-15.7	-47.84	-48.46	8.17	-36.96
8	23979.9	37.35 AV	54	-16.65	-72.12	-67.32	8.17	-57.91
9	39902.49	41.8 PK	74	-32.2	-64.65	-64.64	8.17	-53.46
10	39902.49	32.55 AV	54	-21.45	-72.26	-76.53	8.17	-62.71

Note: Margin value = Emission Level - Limit value

