



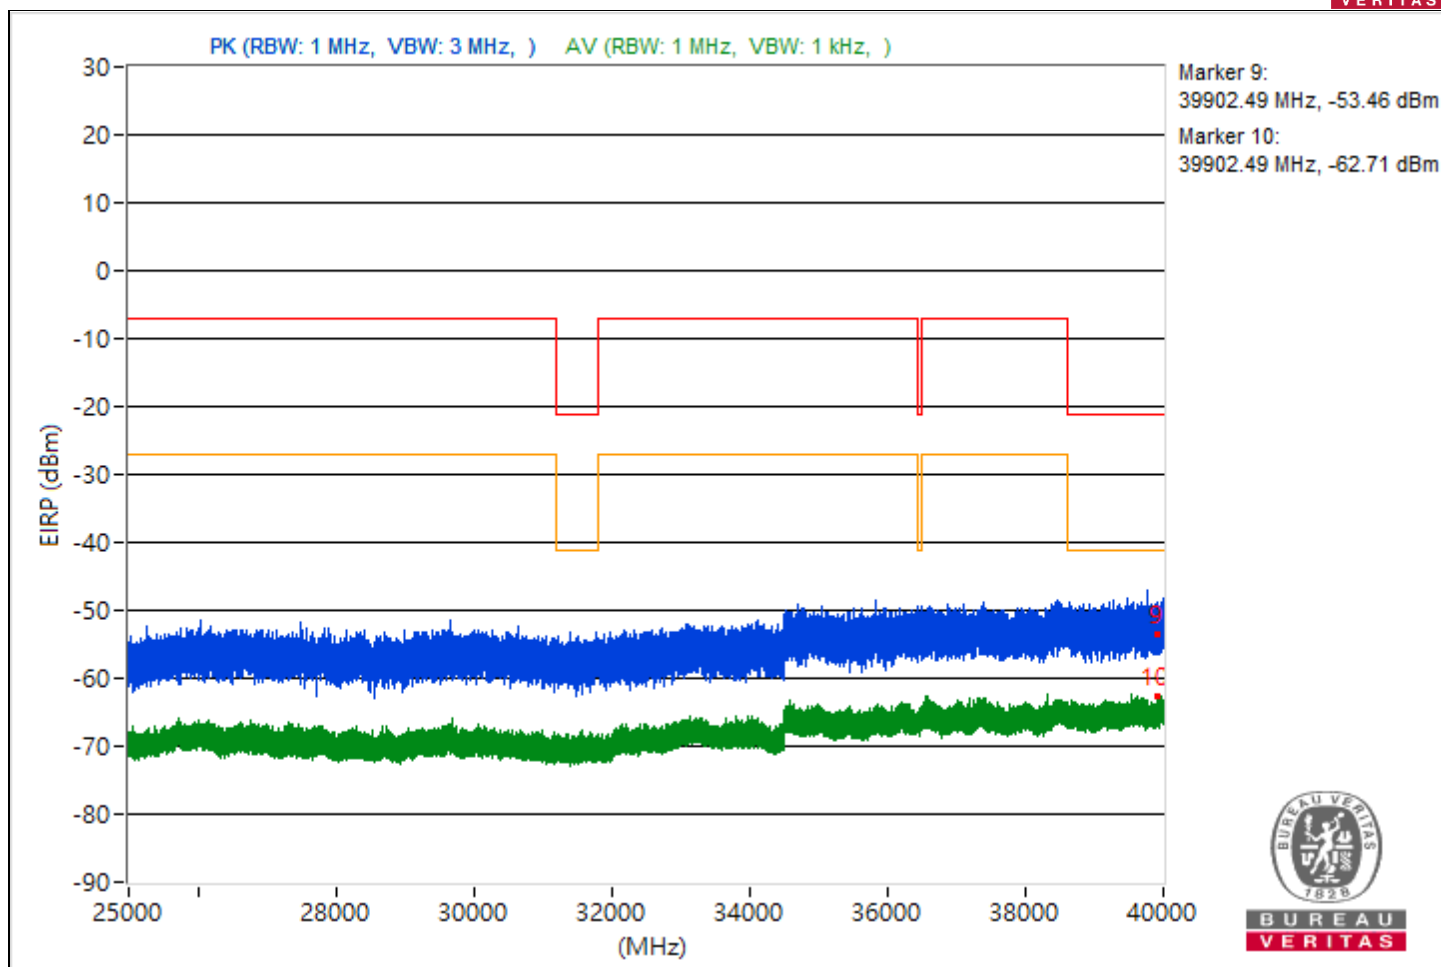


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5070.19	54.85 PK	74	-19.15	-52.57	-50.8	8.17	-40.41
2	5070.19	35.31 AV	54	-18.69	-73.32	-69.69	8.17	-59.95
3	7267.96	53.38 PK	74	-20.62	-53.06	-53.07	8.17	-41.88
4	7267.96	34.08 AV	54	-19.92	-74.36	-71	8.17	-61.18
5	20586.8	55.36 PK	74	-18.64	-50.07	-52.4	8.17	-39.9
6	20586.8	35.67 AV	54	-18.33	-73.77	-69.01	8.17	-59.59
7	23781.7	56.25 PK	74	-17.75	-48.84	-52.17	8.17	-39.01
8	23781.7	37.57 AV	54	-16.43	-70.58	-67.65	8.17	-57.69
9	39631.47	41.1 PK	74	-32.9	-64.14	-66.99	8.17	-54.16
10	39631.47	32.65 AV	54	-21.35	-75.03	-72.82	8.17	-62.61

Note: Margin value = Emission Level - Limit value

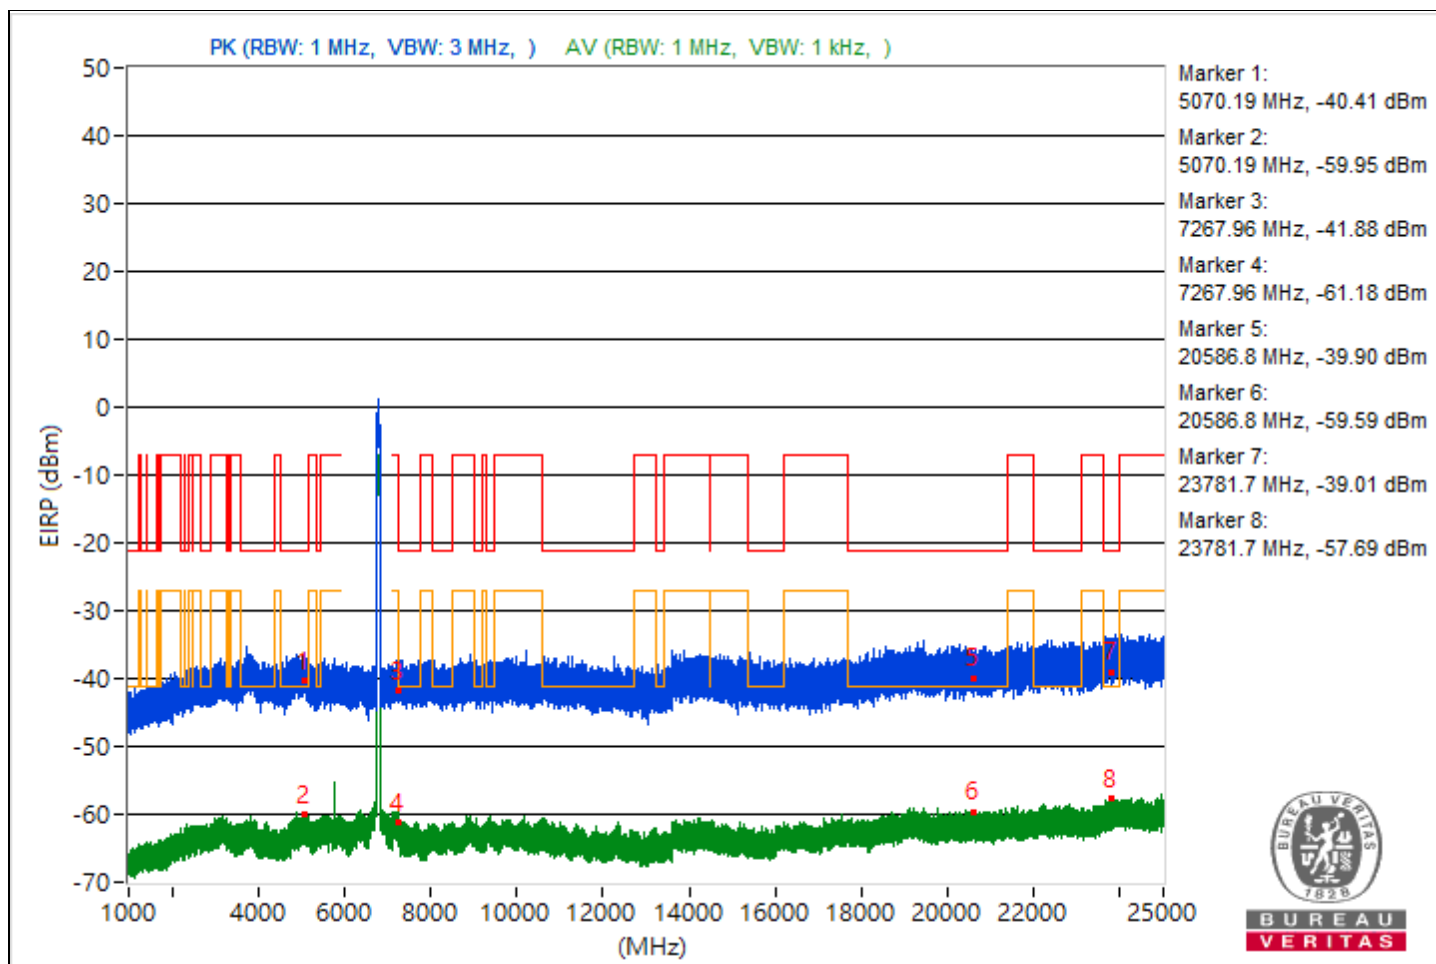


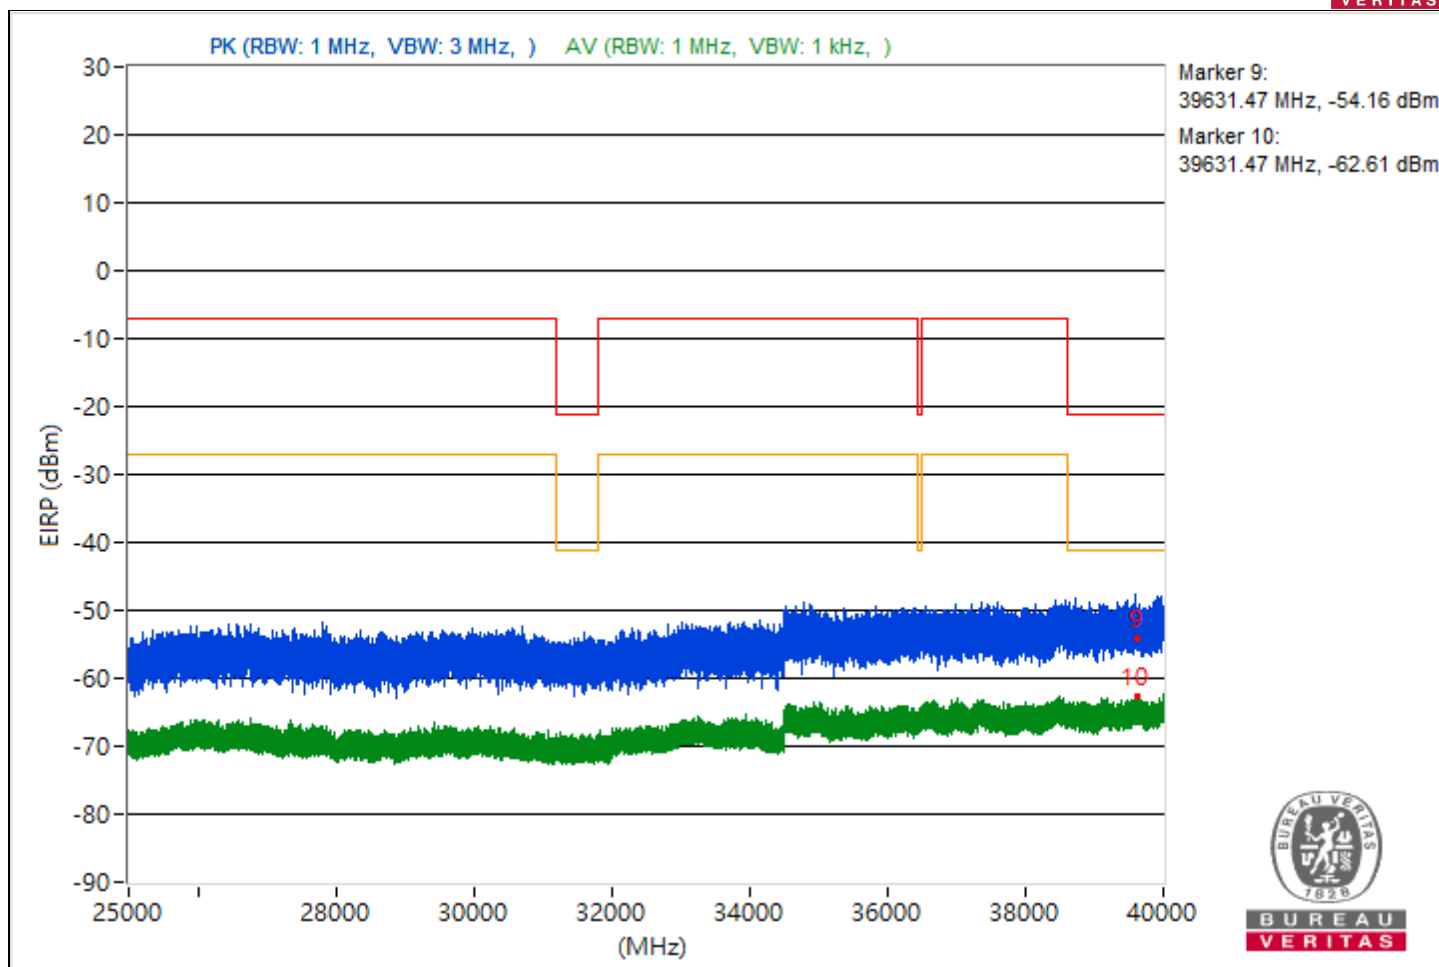


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5106.36	54.95 PK	74	-19.05	-53.33	-50.21	8.17	-40.31
2	5106.36	36.56 AV	54	-17.44	-71.48	-68.71	8.17	-58.7
3	8033.51	56.3 PK	74	-17.7	-49.2	-51.34	8.17	-38.96
4	8033.51	39.77 AV	54	-14.23	-65.67	-67.98	8.17	-55.49
5	21362.2	56.4 PK	74	-17.6	-52.62	-48.44	8.17	-38.86
6	21362.2	35.88 AV	54	-18.12	-73.66	-68.77	8.17	-59.38
7	23878	59.23 PK	74	-14.77	-48.51	-46.2	8.17	-36.03
8	23878	37.59 AV	54	-16.41	-70.64	-67.59	8.17	-57.67
9	39940.27	43.7 PK	74	-30.3	-62.92	-62.57	8.17	-51.56
10	39940.27	32.3 AV	54	-21.7	-72.7	-76.31	8.17	-62.96

Note: Margin value = Emission Level - Limit value

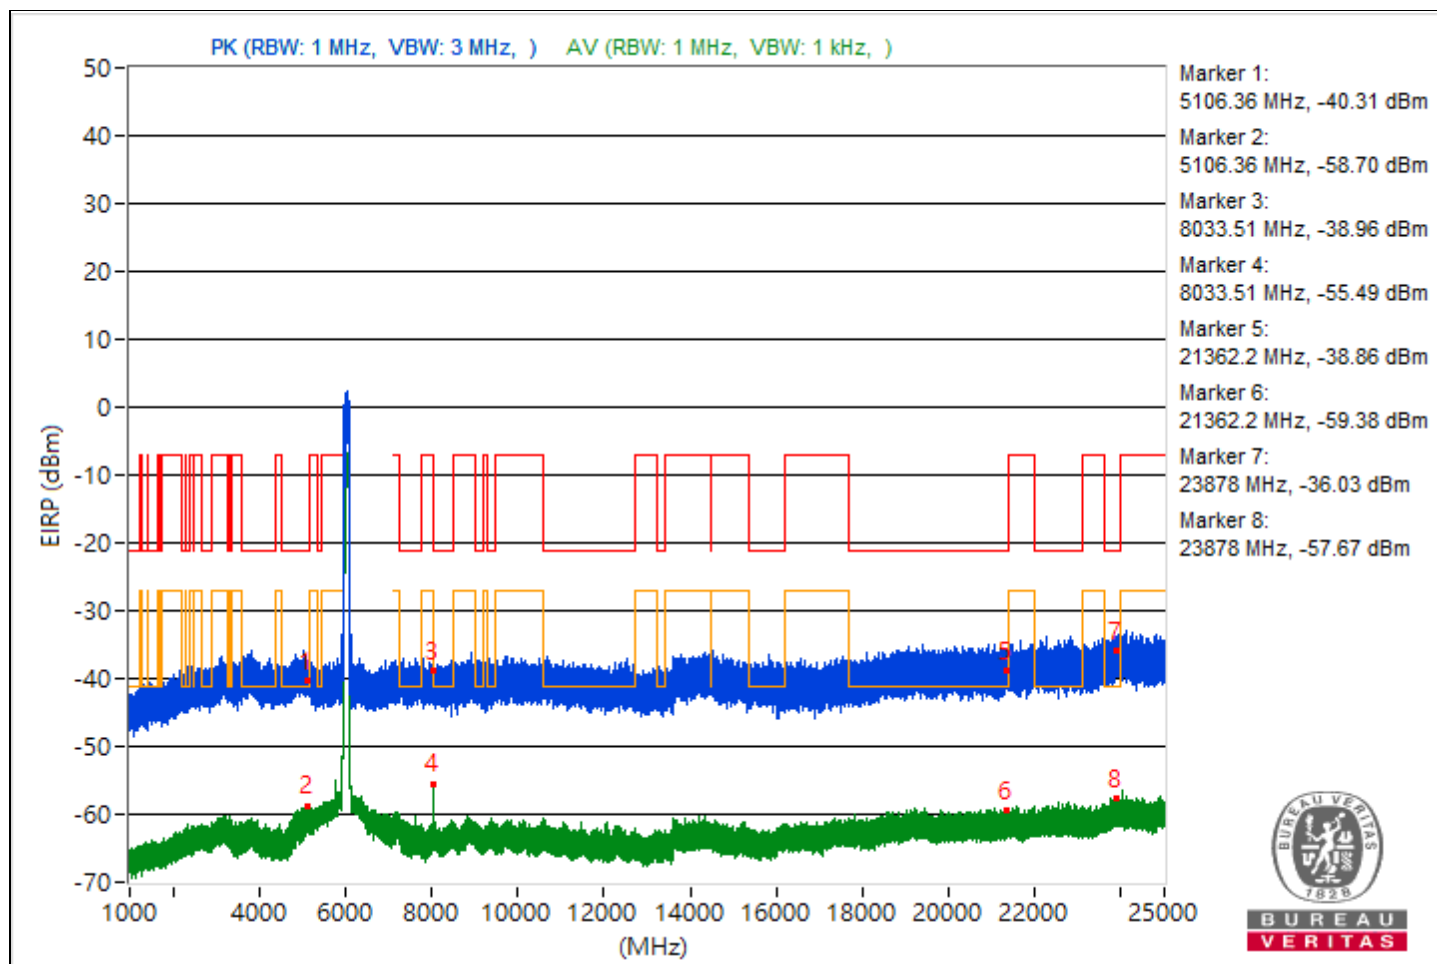


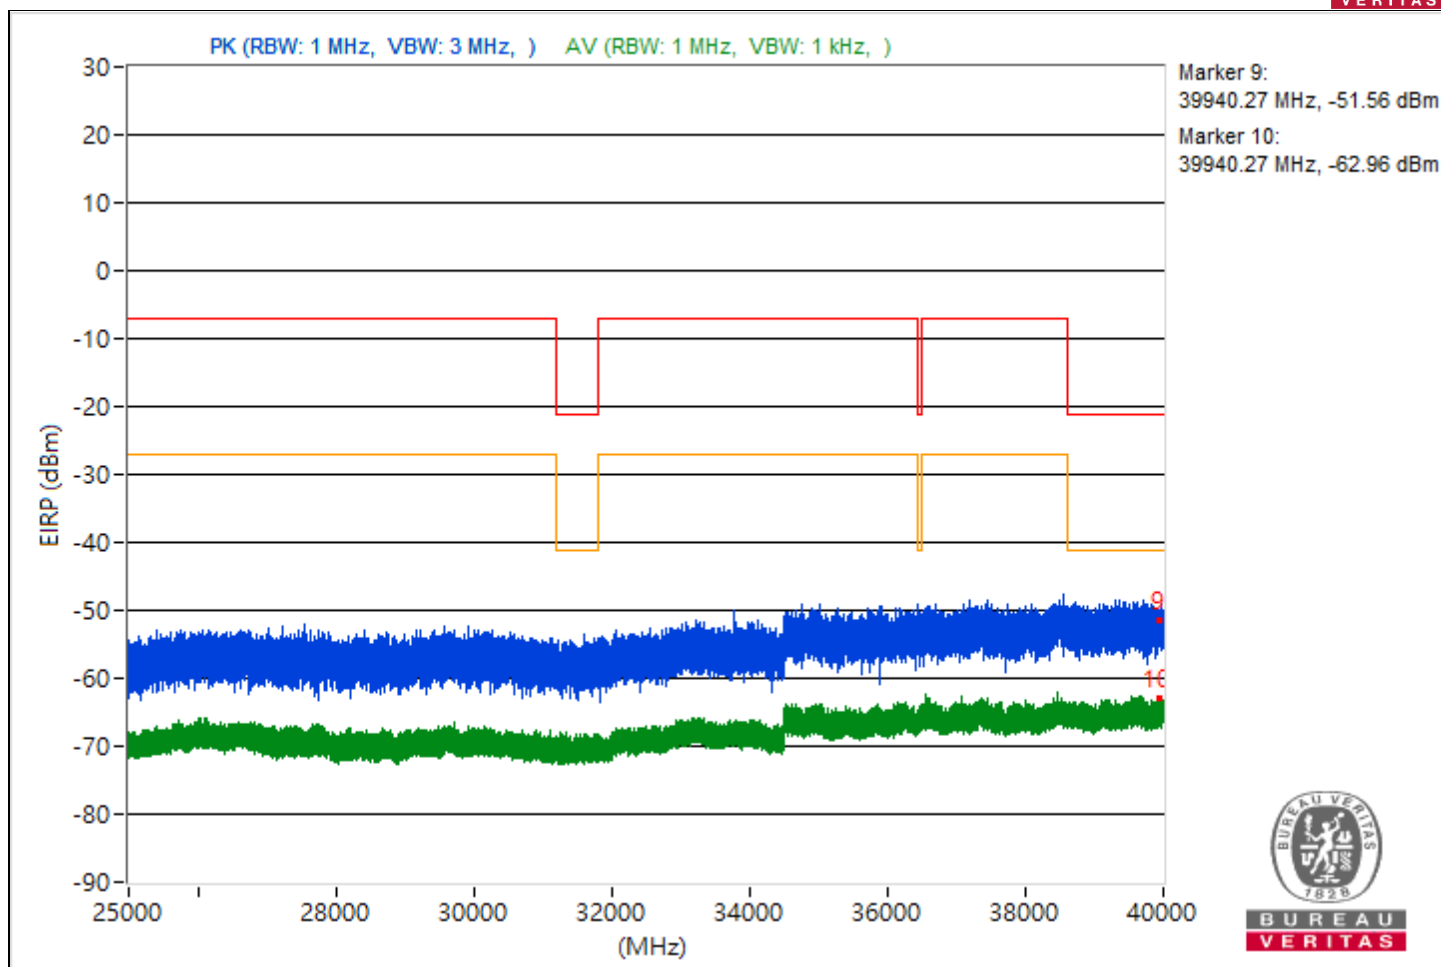


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5065.91	55.57 PK	74	-18.43	-50.13	-51.77	8.17	-39.69
2	5065.91	36.44 AV	54	-17.56	-71.7	-68.79	8.17	-58.82
3	7262.67	53.51 PK	74	-20.49	-53.6	-52.36	8.17	-41.75
4	7262.67	35.62 AV	54	-18.38	-69.99	-71.85	8.17	-59.64
5	19328.6	57.1 PK	74	-16.9	-49.54	-49.15	8.17	-38.16
6	19328.6	36.13 AV	54	-17.87	-68.88	-72.45	8.17	-59.13
7	23943.5	56.42 PK	74	-17.58	-50.48	-49.6	8.17	-38.84
8	23943.5	37.68 AV	54	-16.32	-67.71	-70.16	8.17	-57.58
9	39626.84	44.84 PK	74	-29.16	-61.47	-61.73	8.17	-50.42
10	39626.84	32.76 AV	54	-21.24	-75.75	-72.28	8.17	-62.5

Note: Margin value = Emission Level - Limit value

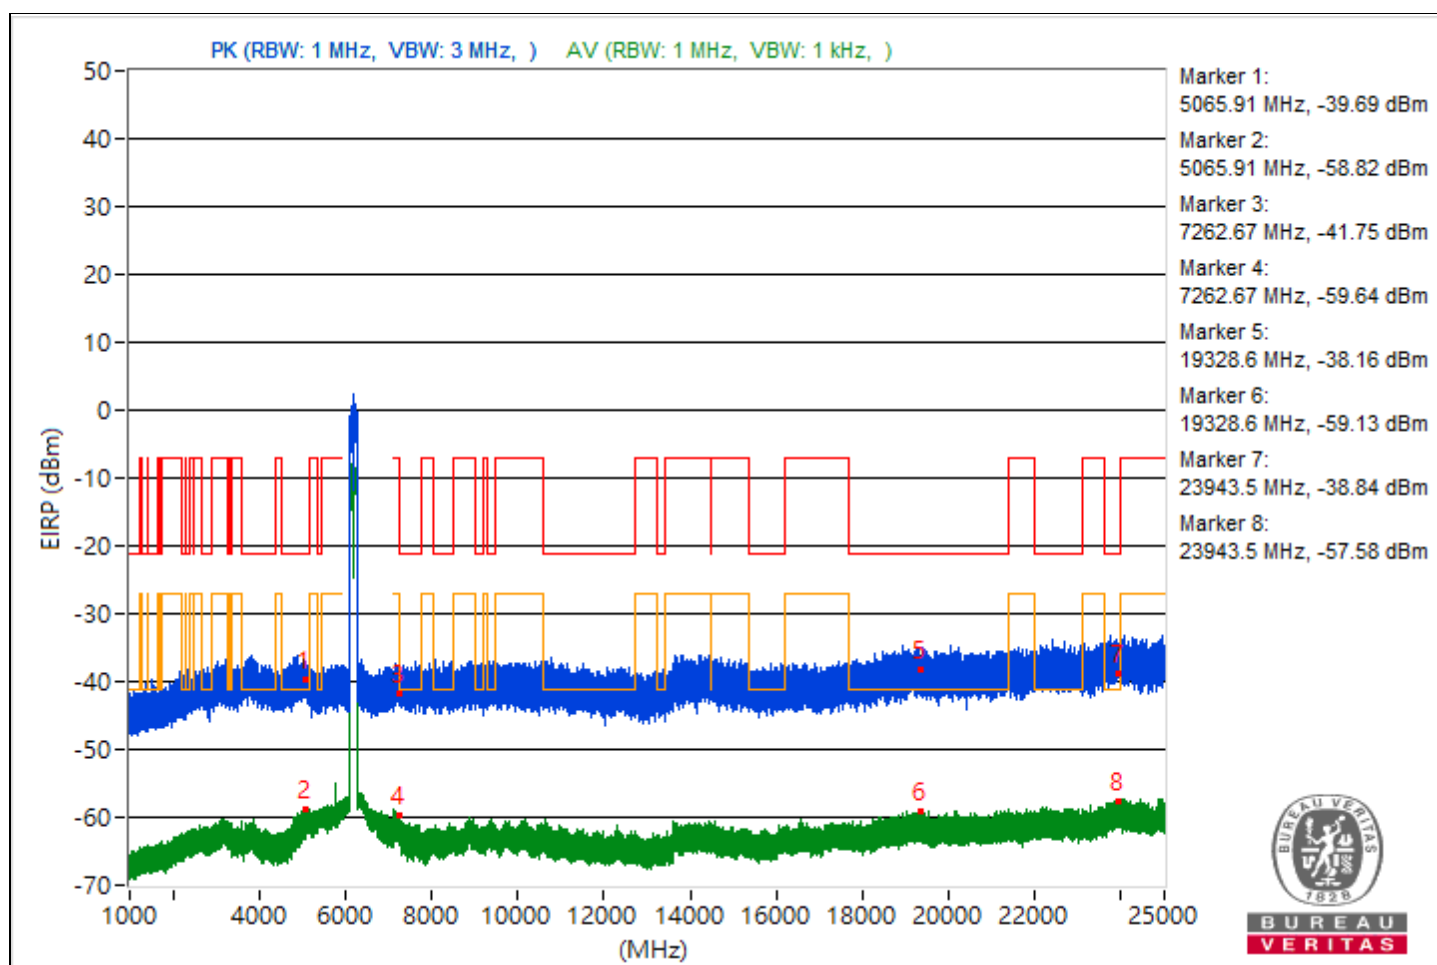


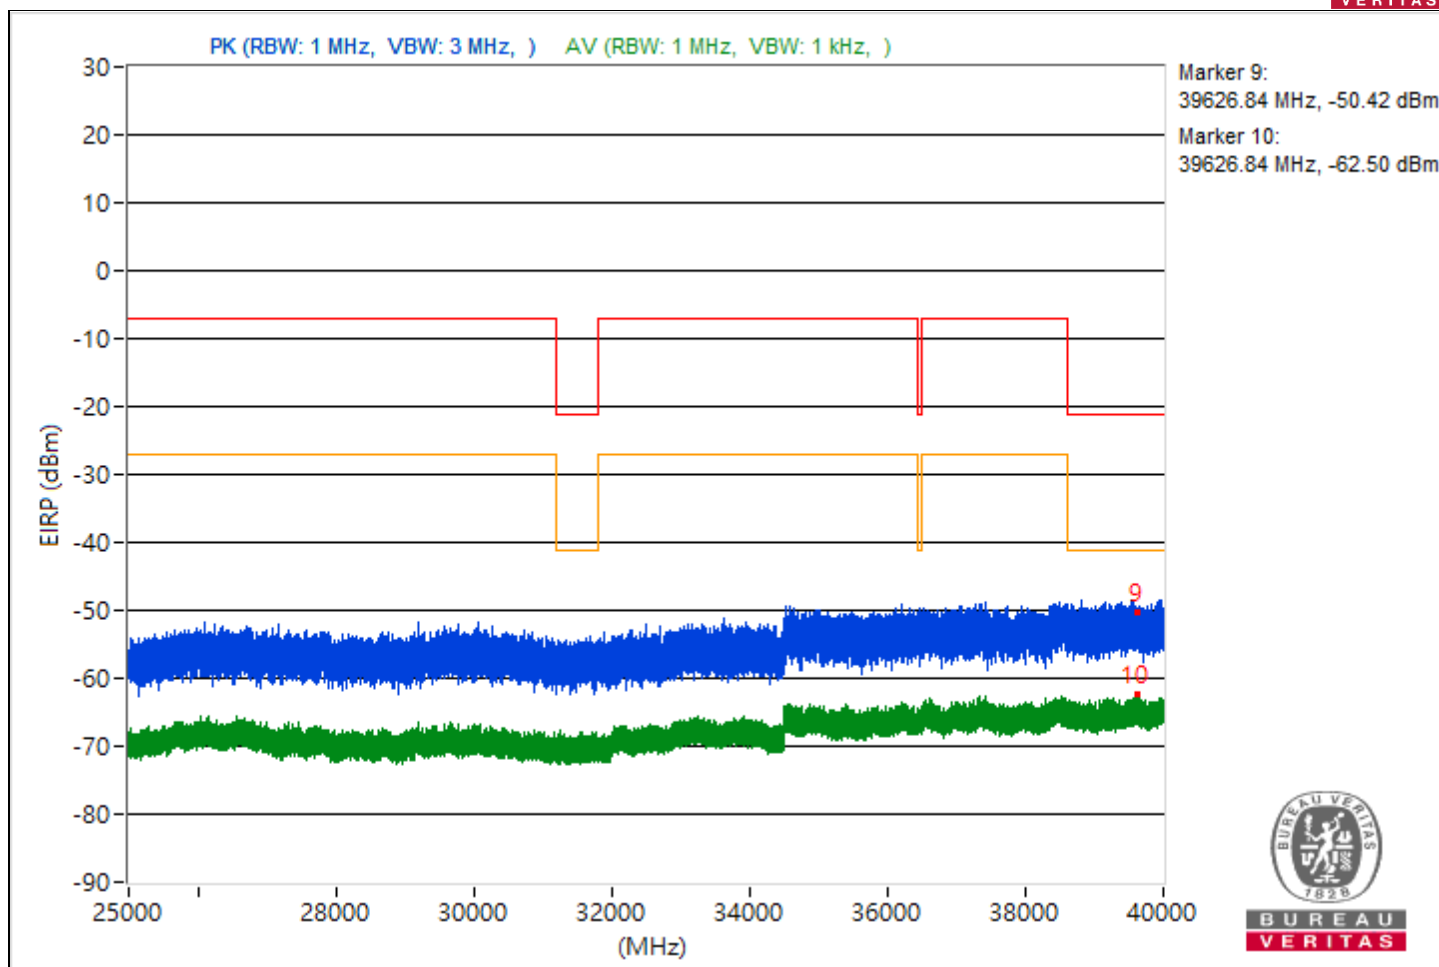


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5439.87	52.33 PK	74	-21.67	-53.75	-54.5	8.17	-42.93
2	5439.87	36.24 AV	54	-17.76	-71.7	-69.08	8.17	-59.02
3	7253.72	54.07 PK	74	-19.93	-52	-52.77	8.17	-41.19
4	7253.72	35.02 AV	54	-18.98	-70.39	-72.79	8.17	-60.24
5	21180.6	55.26 PK	74	-18.74	-50.91	-51.46	8.17	-40
6	21180.6	36.26 AV	54	-17.74	-68.57	-72.75	8.17	-59
7	23928.7	57.61 PK	74	-16.39	-49.51	-48.25	8.17	-37.65
8	23928.7	37.61 AV	54	-16.39	-66.87	-72.47	8.17	-57.65
9	39569.96	42.11 PK	74	-31.89	-65.22	-63.6	8.17	-53.15
10	39569.96	33.29 AV	54	-20.71	-72.78	-73.56	8.17	-61.97

Note: Margin value = Emission Level - Limit value

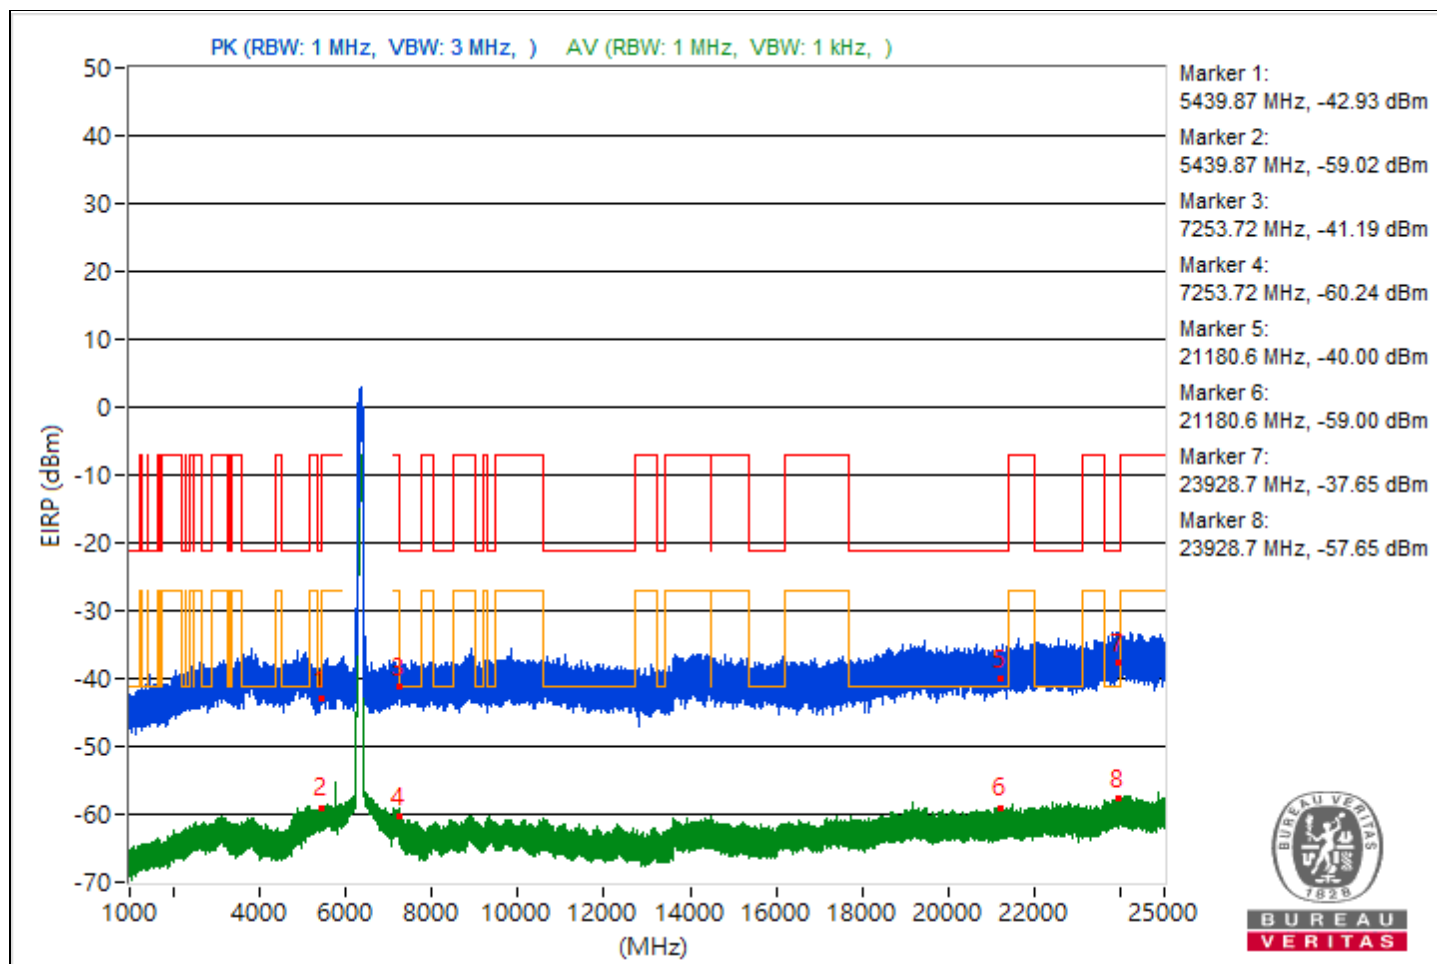


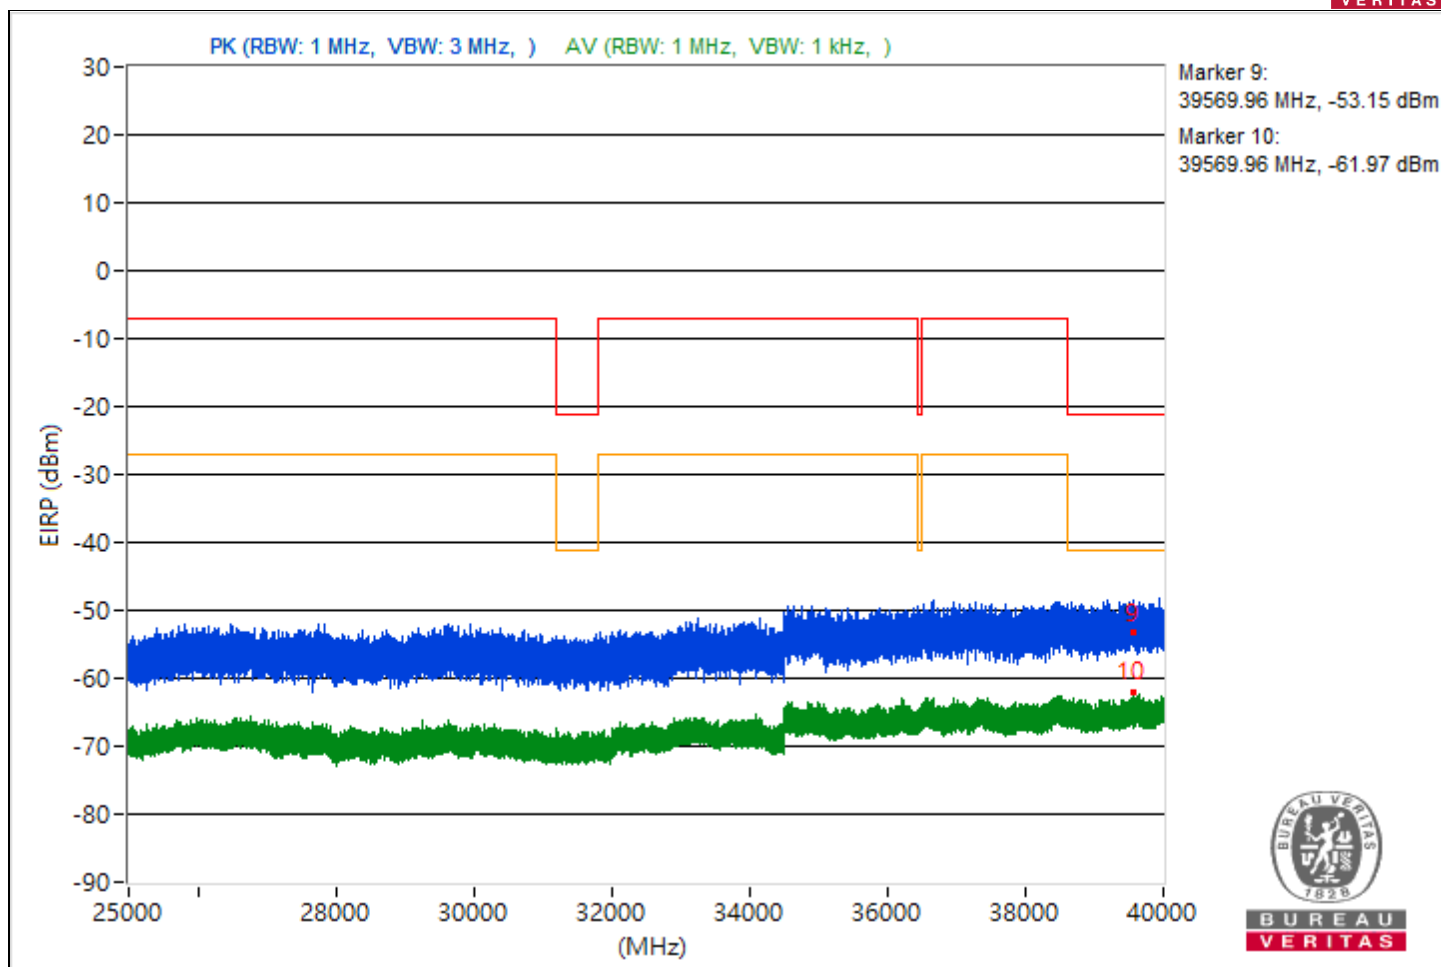


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5056.42	55.62 PK	74	-18.38	-50.72	-50.92	8.17	-39.64
2	5056.42	36.78 AV	54	-17.22	-69.2	-70.18	8.17	-58.48
3	7253.41	54.37 PK	74	-19.63	-51.11	-53.29	8.17	-40.89
4	7253.41	35.5 AV	54	-18.5	-69.93	-72.27	8.17	-59.76
5	21189.9	56.3 PK	74	-17.7	-48.86	-51.95	8.17	-38.96
6	21189.9	36.62 AV	54	-17.38	-68.93	-70.93	8.17	-58.64
7	23998.3	56.64 PK	74	-17.36	-49.39	-50.25	8.17	-38.62
8	23998.3	37.94 AV	54	-16.06	-70.21	-67.28	8.17	-57.32
9	39665.16	42.45 PK	74	-31.55	-62.9	-65.45	8.17	-52.81
10	39665.16	32.83 AV	54	-21.17	-72.27	-75.57	8.17	-62.43

Note: Margin value = Emission Level - Limit value

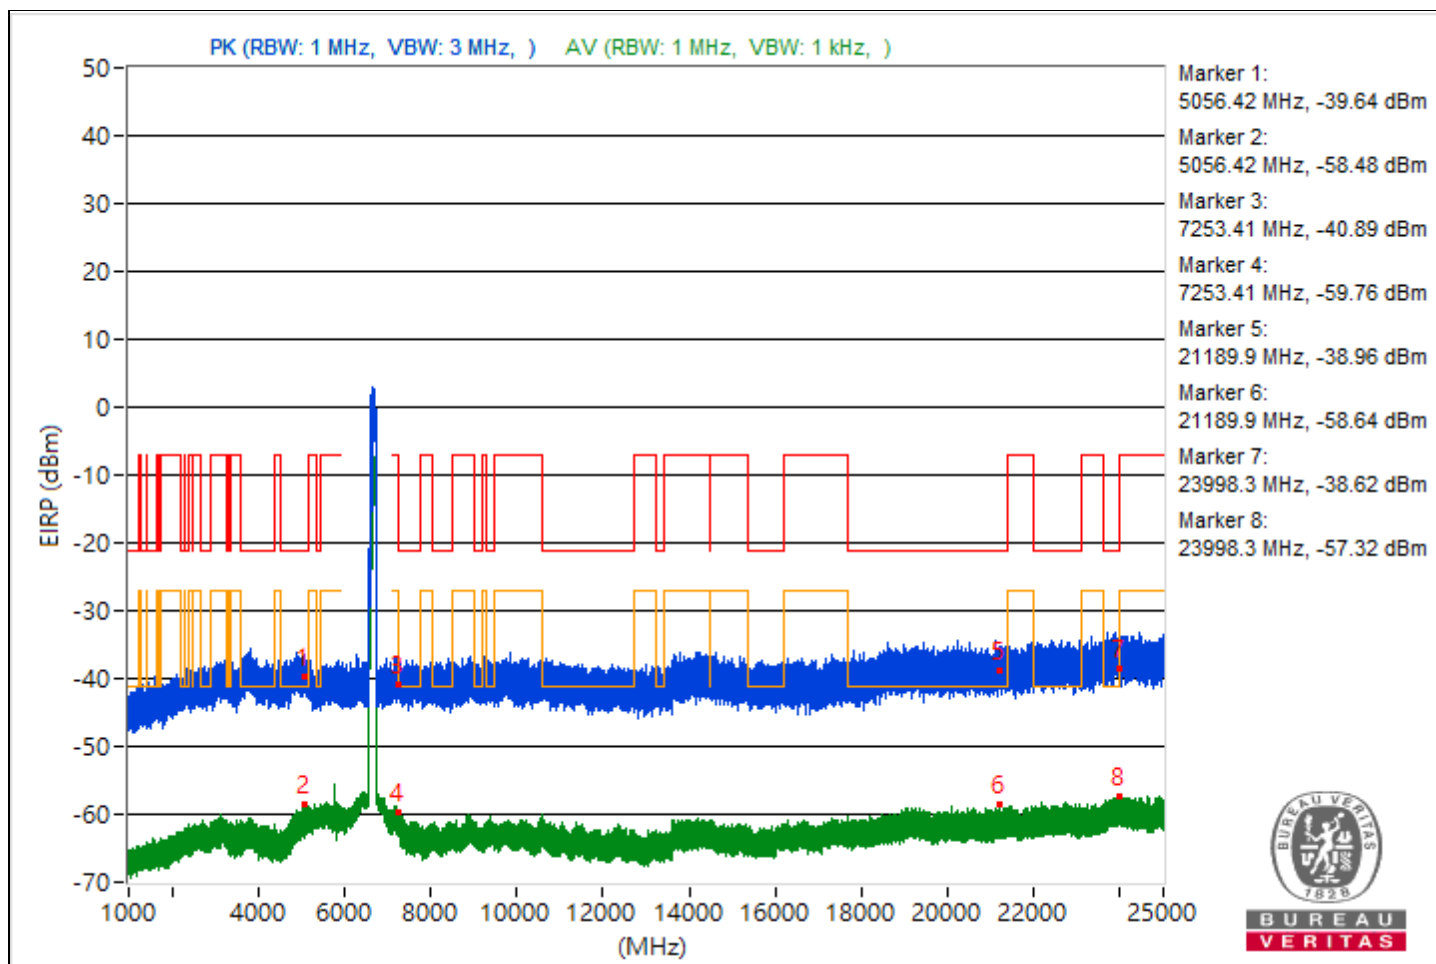


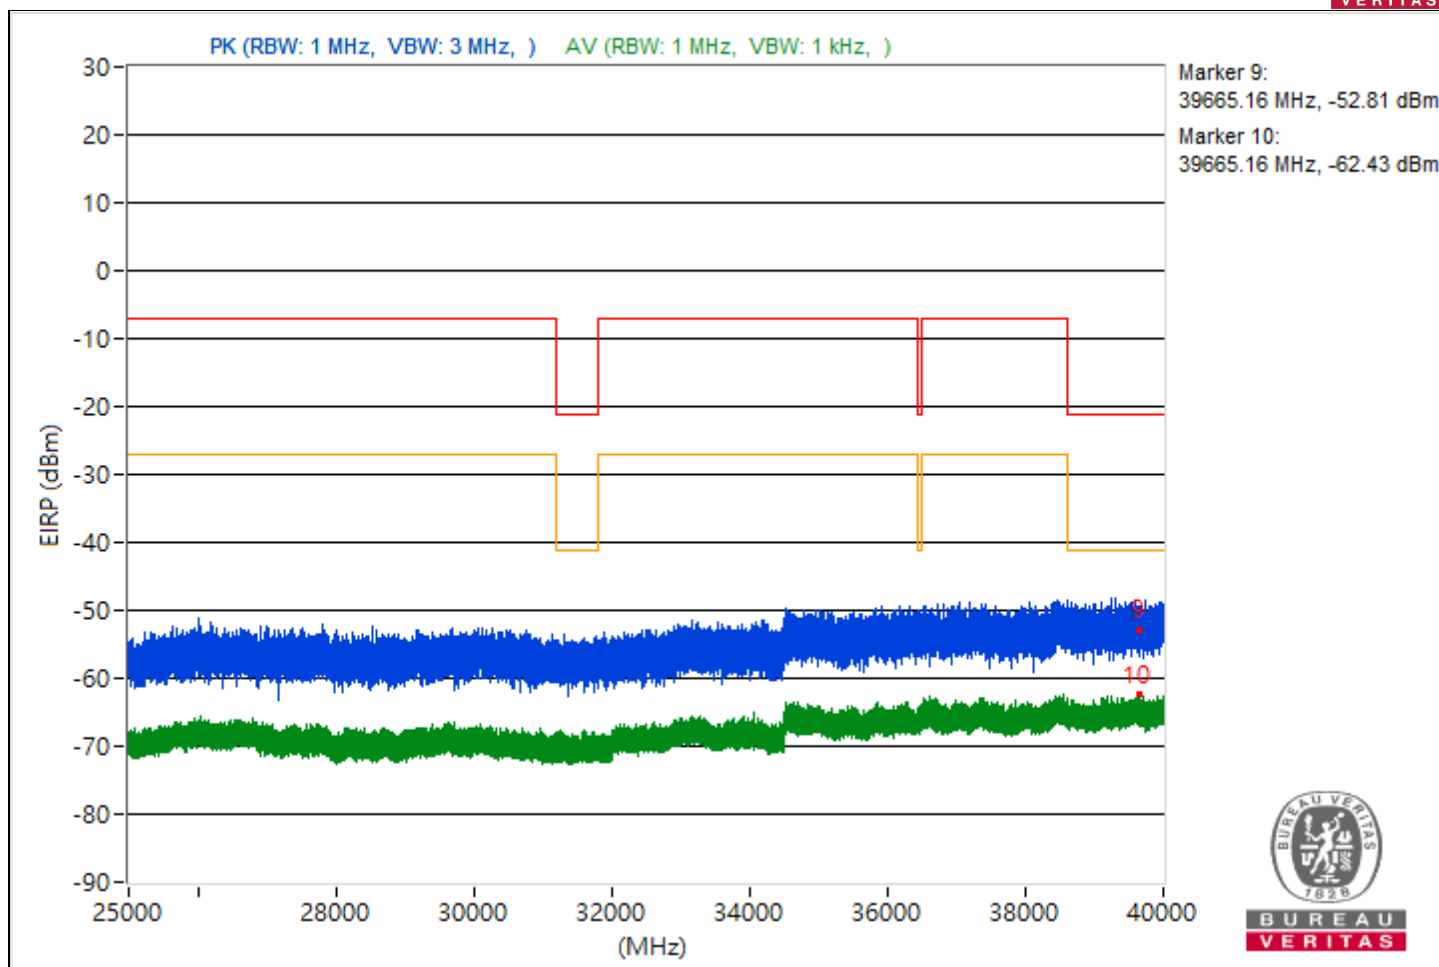


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4884.22	57.5 PK	74	-16.5	-49.45	-48.49	8.17	-37.76
2	4884.22	48.18 AV	54	-5.82	-58.08	-58.45	8.17	-47.08
3	7326.13	57.92 PK	74	-16.08	-48.97	-48.12	8.17	-37.34
4	7326.13	49.2 AV	54	-4.8	-57.08	-57.4	8.17	-46.06
5	19303	56.08 PK	74	-17.92	-49.93	-50.85	8.17	-39.18
6	19303	37.32 AV	54	-16.68	-71.69	-67.51	8.17	-57.94
7	23904.6	59.28 PK	74	-14.72	-48.44	-46.17	8.17	-35.98
8	23904.6	38.56 AV	54	-15.44	-66.86	-69.22	8.17	-56.7
9	39183.38	41.42 PK	74	-32.58	-66.06	-64.19	8.17	-53.84
10	39183.38	32.82 AV	54	-21.18	-76.71	-71.83	8.17	-62.44

Note: Margin value = Emission Level - Limit value

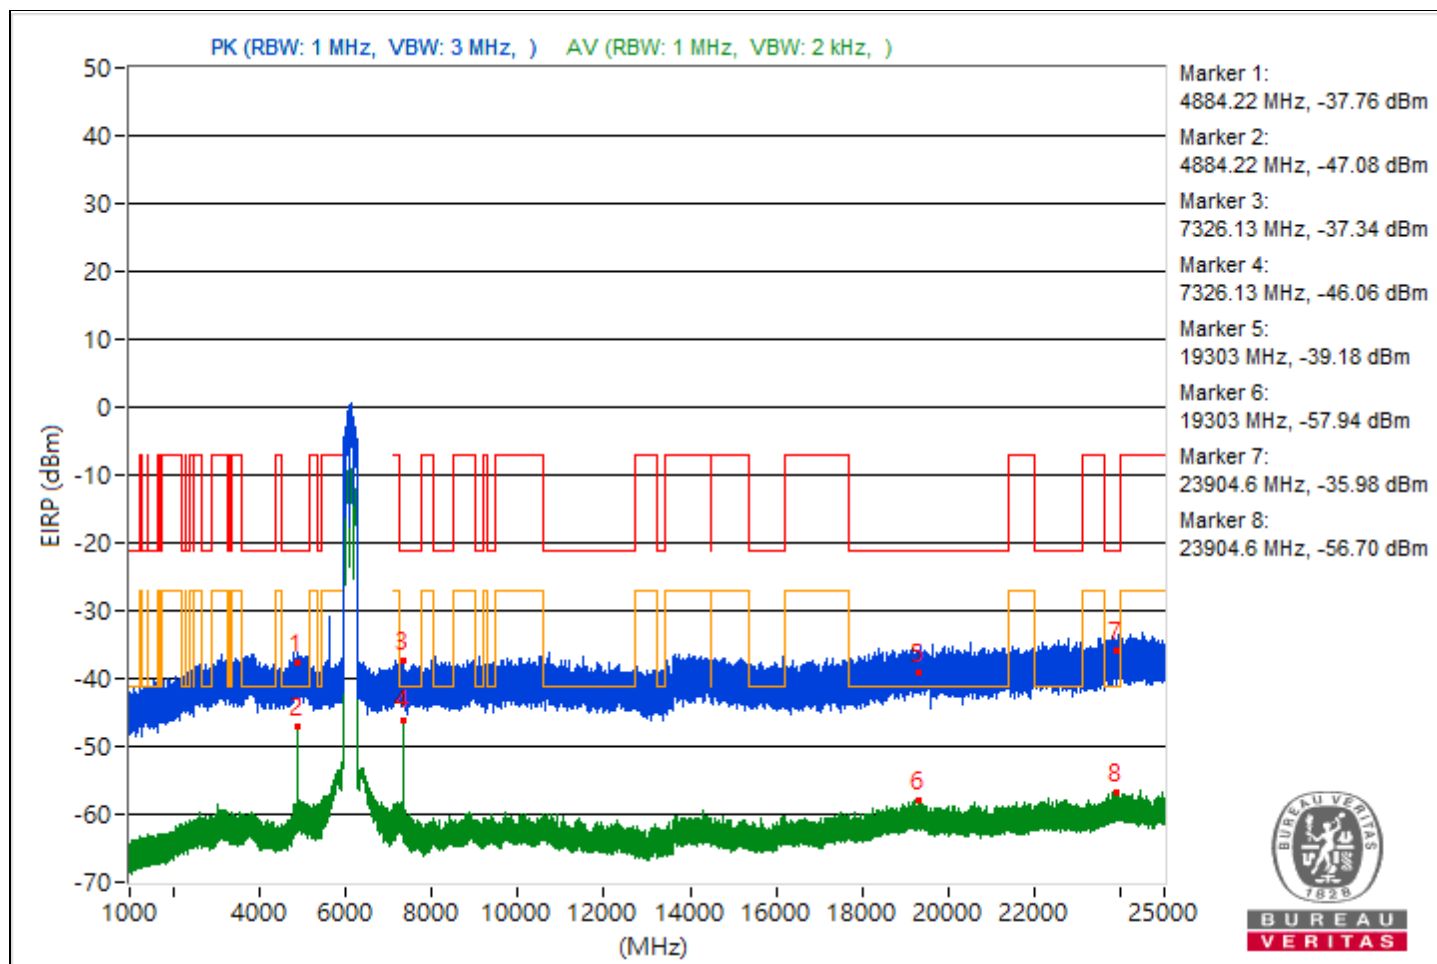


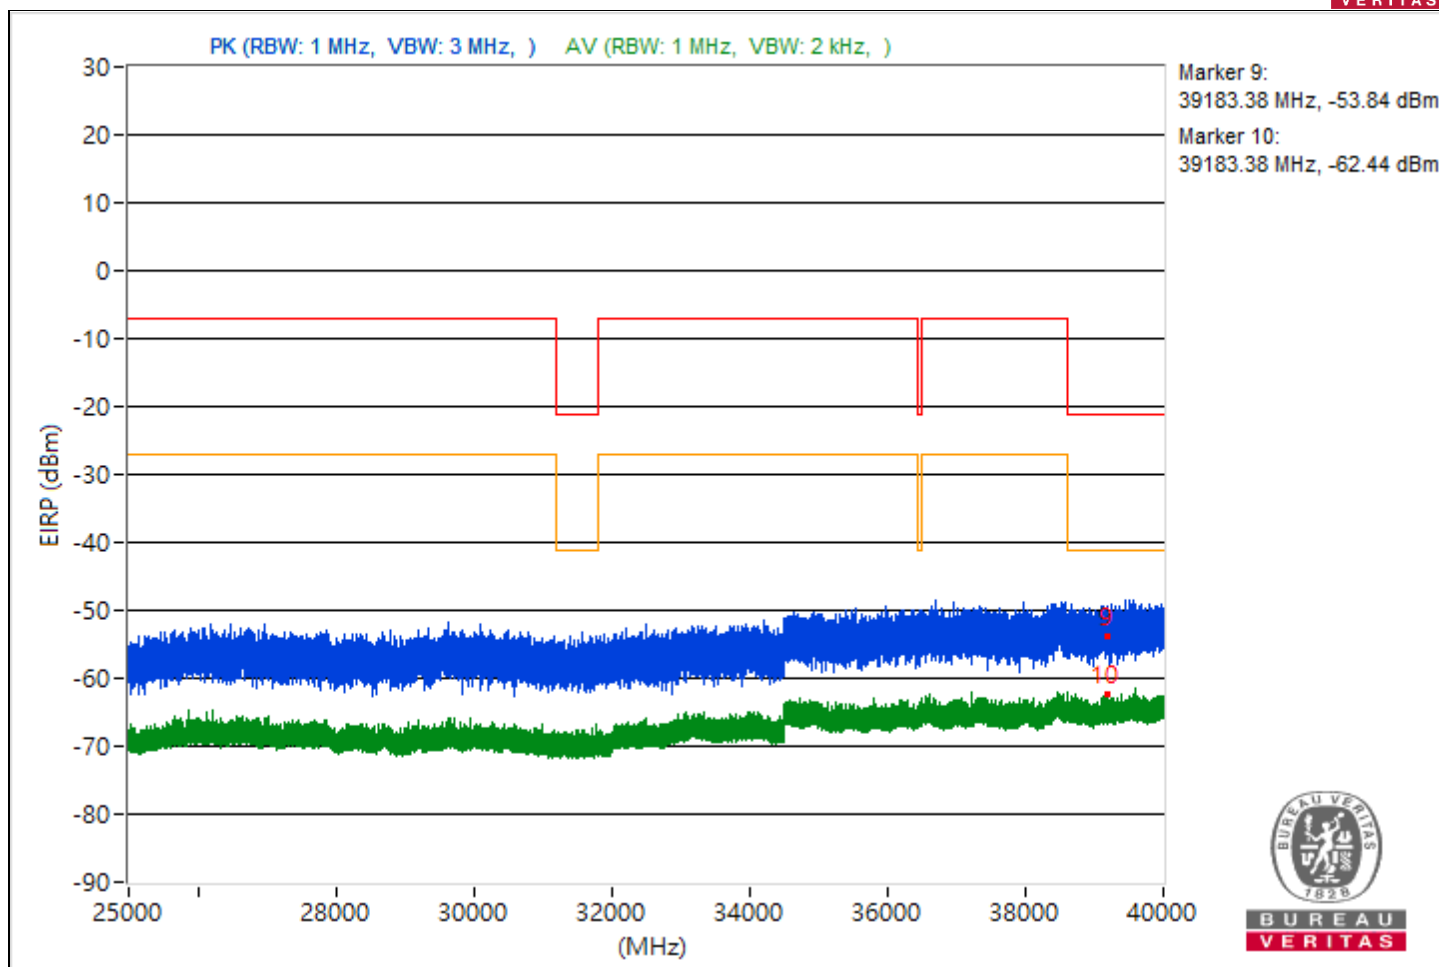


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5396.7	52.19 PK	74	-21.81	-54.62	-53.91	8.17	-43.07
2	5396.7	37.19 AV	54	-16.81	-70.45	-68.31	8.17	-58.07
3	10644.36	55.46 PK	74	-18.54	-50.34	-51.74	8.17	-39.8
4	10644.36	35.65 AV	54	-18.35	-69.1	-73.6	8.17	-59.61
5	20690.4	57.26 PK	74	-16.74	-51.24	-47.79	8.17	-38
6	20690.4	36.56 AV	54	-17.44	-72.76	-68.16	8.17	-58.7
7	23850.7	57.68 PK	74	-16.32	-47.76	-50.06	8.17	-37.58
8	23850.7	38.59 AV	54	-15.41	-70.98	-66.05	8.17	-56.67
9	39958.67	43.14 PK	74	-30.86	-65.15	-62.01	8.17	-52.12
10	39958.67	33.3 AV	54	-20.7	-76.24	-71.35	8.17	-61.96

Note: Margin value = Emission Level - Limit value

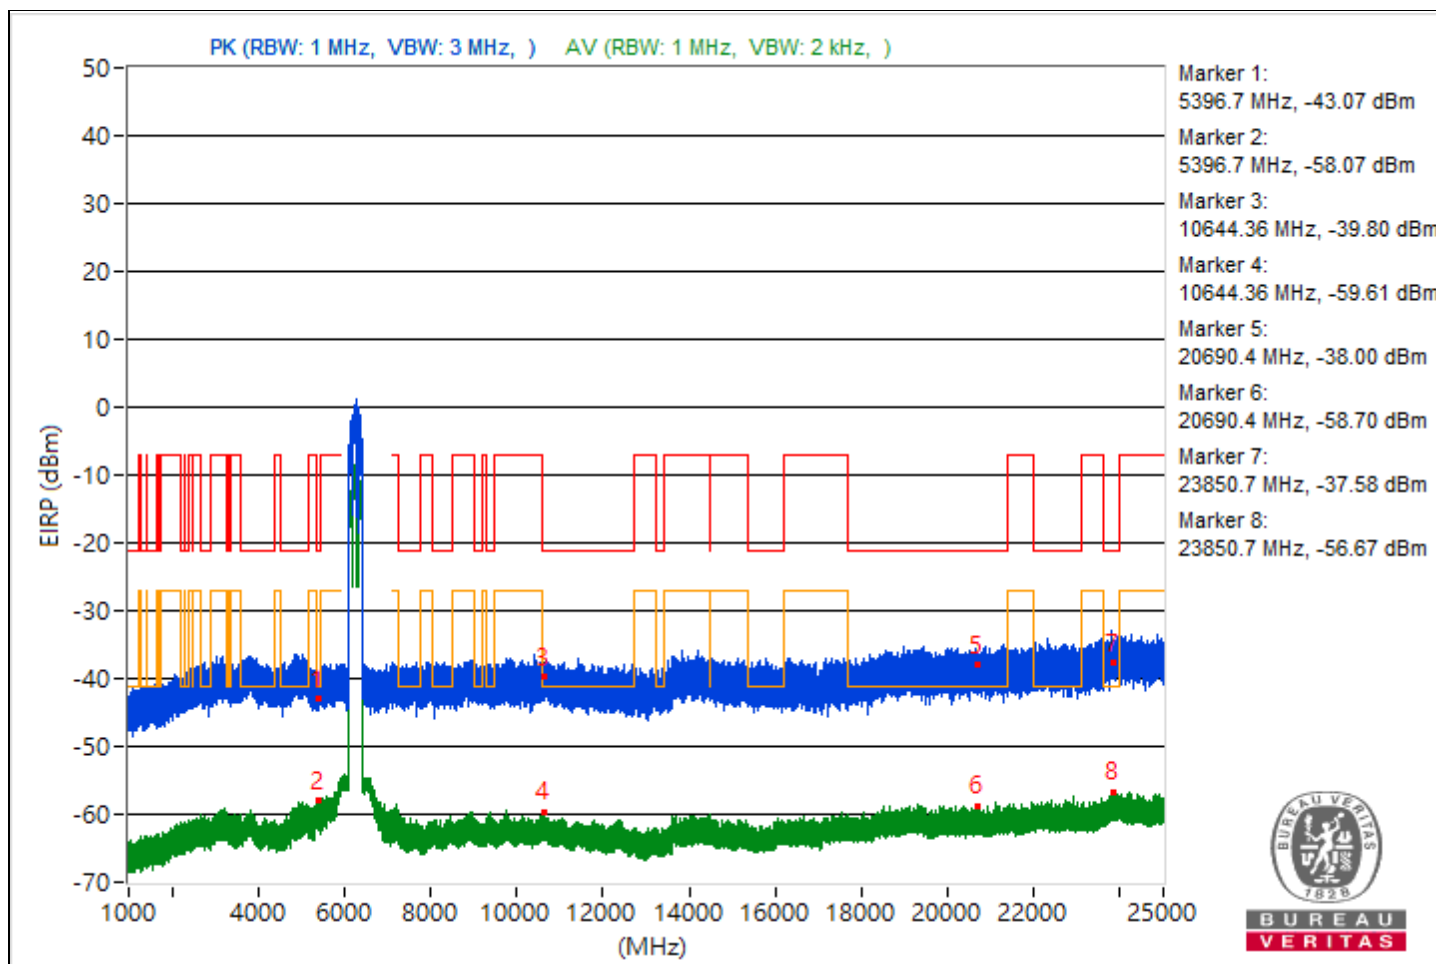


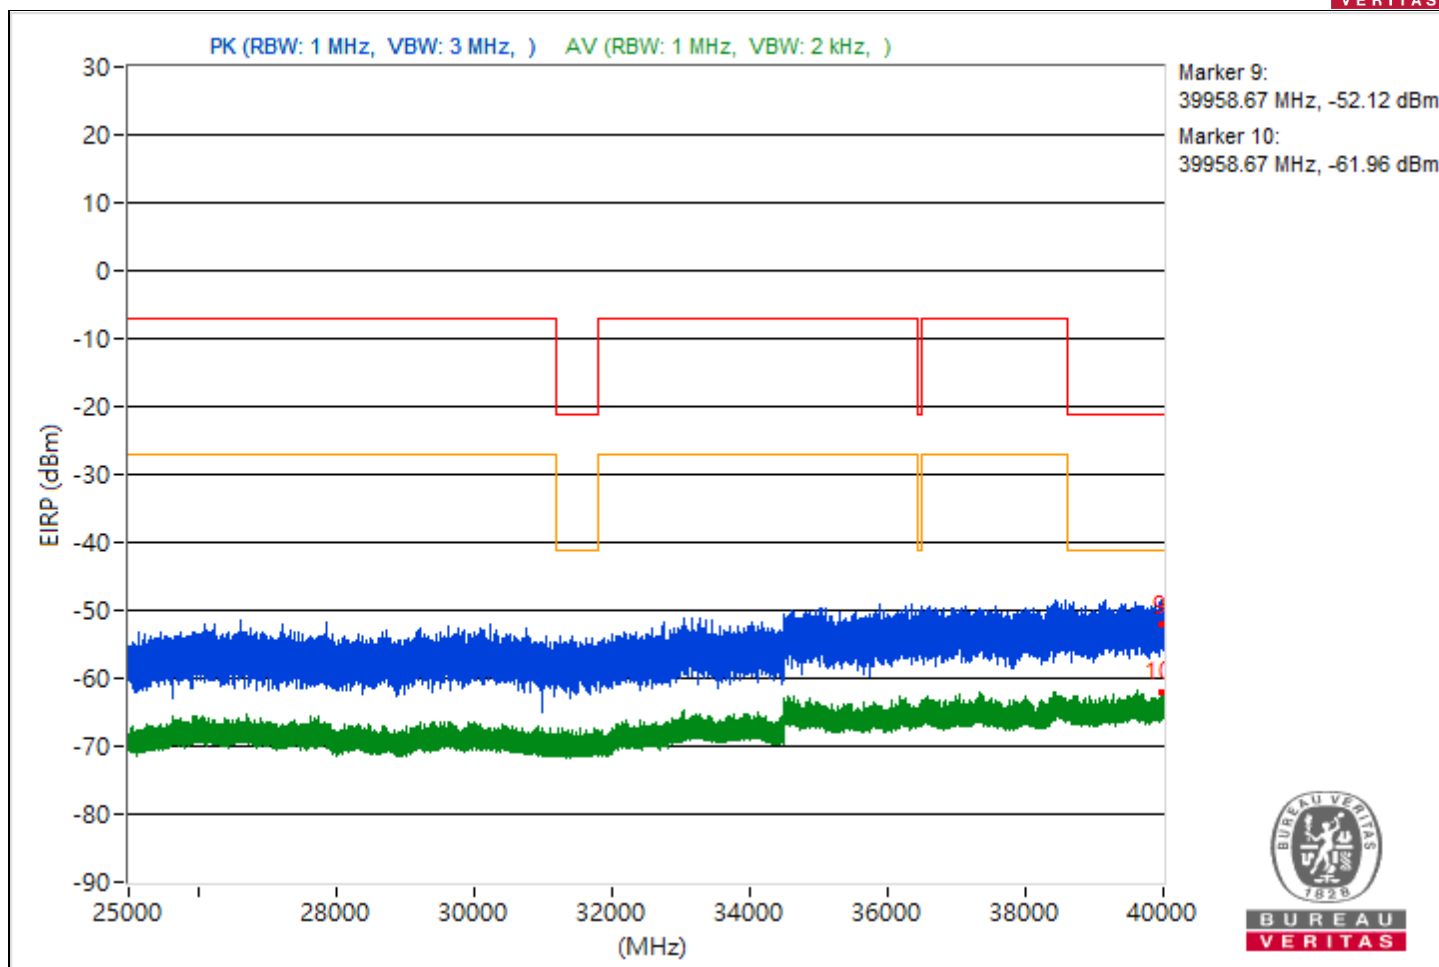


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5110.94	54.34 PK	74	-19.66	-52.88	-51.44	8.17	-40.92
2	5110.94	35.04 AV	54	-18.96	-70.87	-72	8.17	-60.22
3	10657.69	54.92 PK	74	-19.08	-52.02	-51.08	8.17	-40.34
4	10657.69	33.83 AV	54	-20.17	-71.06	-75.03	8.17	-61.43
5	19193.3	57.76 PK	74	-16.24	-47.98	-49.52	8.17	-37.5
6	19193.3	35.28 AV	54	-18.72	-69.35	-74.32	8.17	-59.98
7	23920.3	59.58 PK	74	-14.42	-46.3	-47.5	8.17	-35.68
8	23920.3	37.47 AV	54	-16.53	-70.05	-68.1	8.17	-57.79
9	39644.71	42.14 PK	74	-31.86	-65.28	-63.51	8.17	-53.12
10	39644.71	32.85 AV	54	-21.15	-72.9	-74.41	8.17	-62.41

Note: Margin value = Emission Level - Limit value

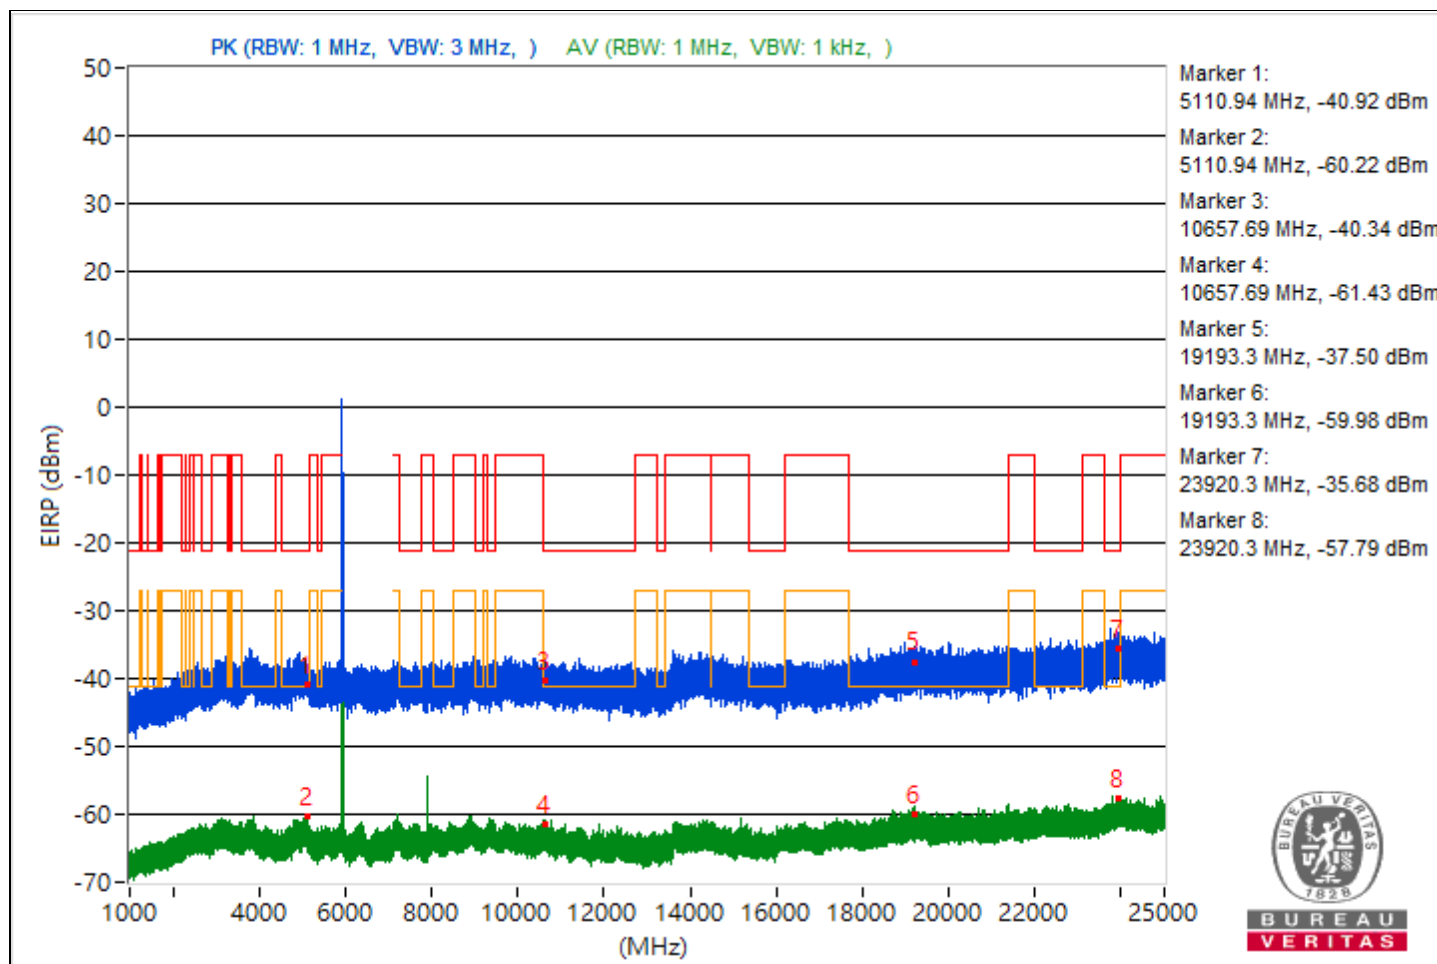


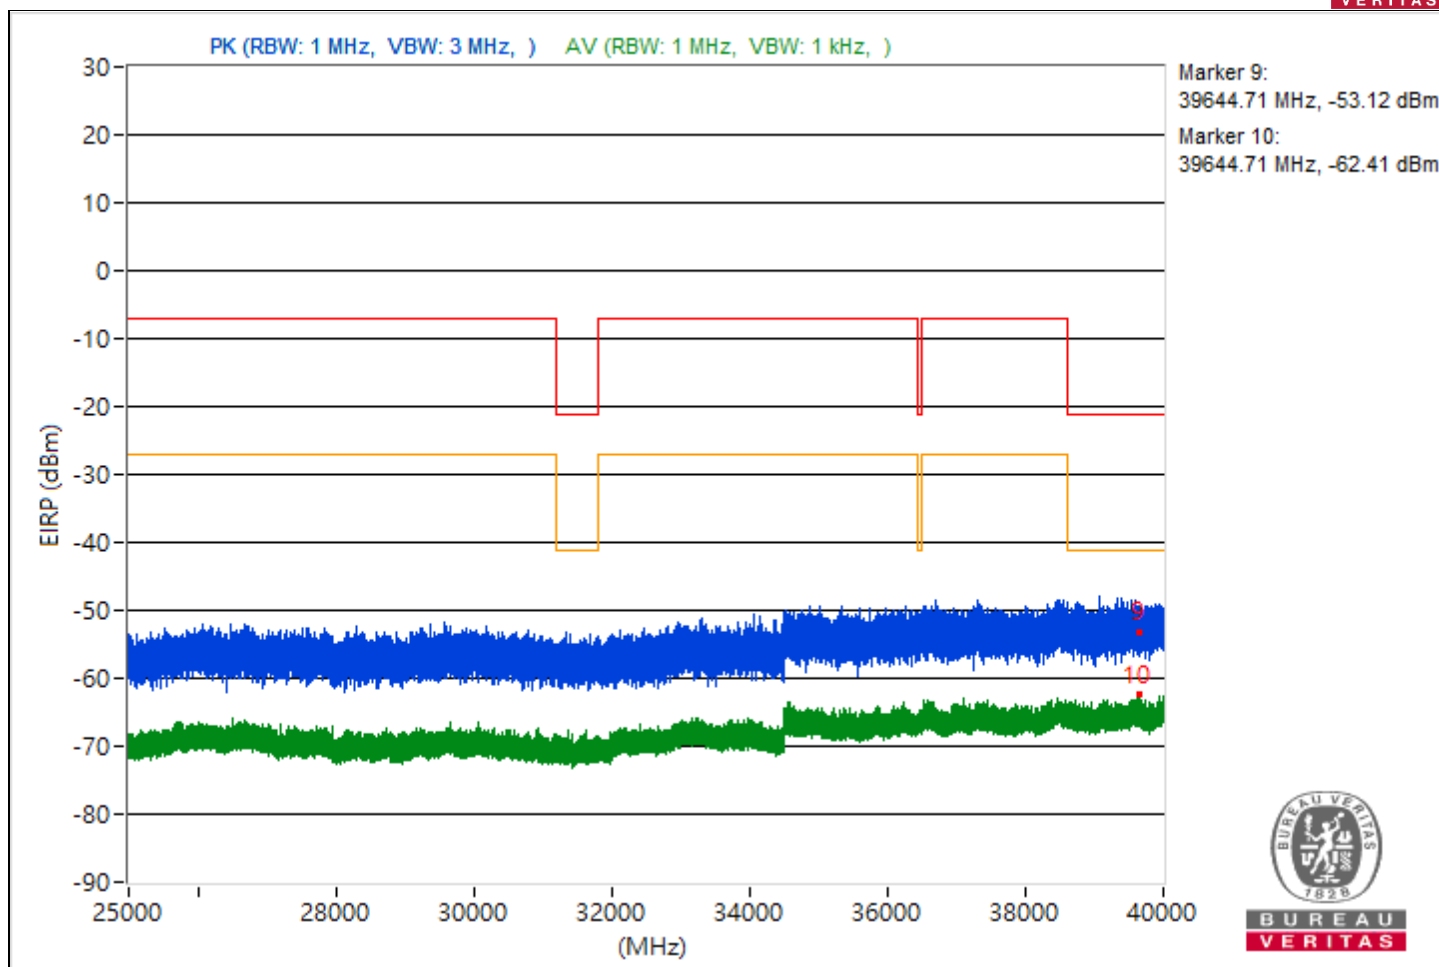


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3799.07	56.28 PK	74	-17.72	-49.62	-50.79	8.17	-38.98
2	3799.07	34.88 AV	54	-19.12	-70.47	-73.01	8.17	-60.38
3	11910.31	53.59 PK	74	-20.41	-53.1	-52.61	8.17	-41.67
4	11910.31	34.62 AV	54	-19.38	-75.97	-69.73	8.17	-60.64
5	19499.1	55.57 PK	74	-18.43	-51.76	-50.13	8.17	-39.69
6	19499.1	35.87 AV	54	-18.13	-69.36	-72.26	8.17	-59.39
7	23902.3	58.94 PK	74	-15.06	-49.26	-46.25	8.17	-36.32
8	23902.3	37.64 AV	54	-16.36	-68.17	-69.52	8.17	-57.62
9	39653.07	42.78 PK	74	-31.22	-65.21	-62.52	8.17	-52.48
10	39653.07	32.53 AV	54	-21.47	-75.91	-72.54	8.17	-62.73

Note: Margin value = Emission Level - Limit value

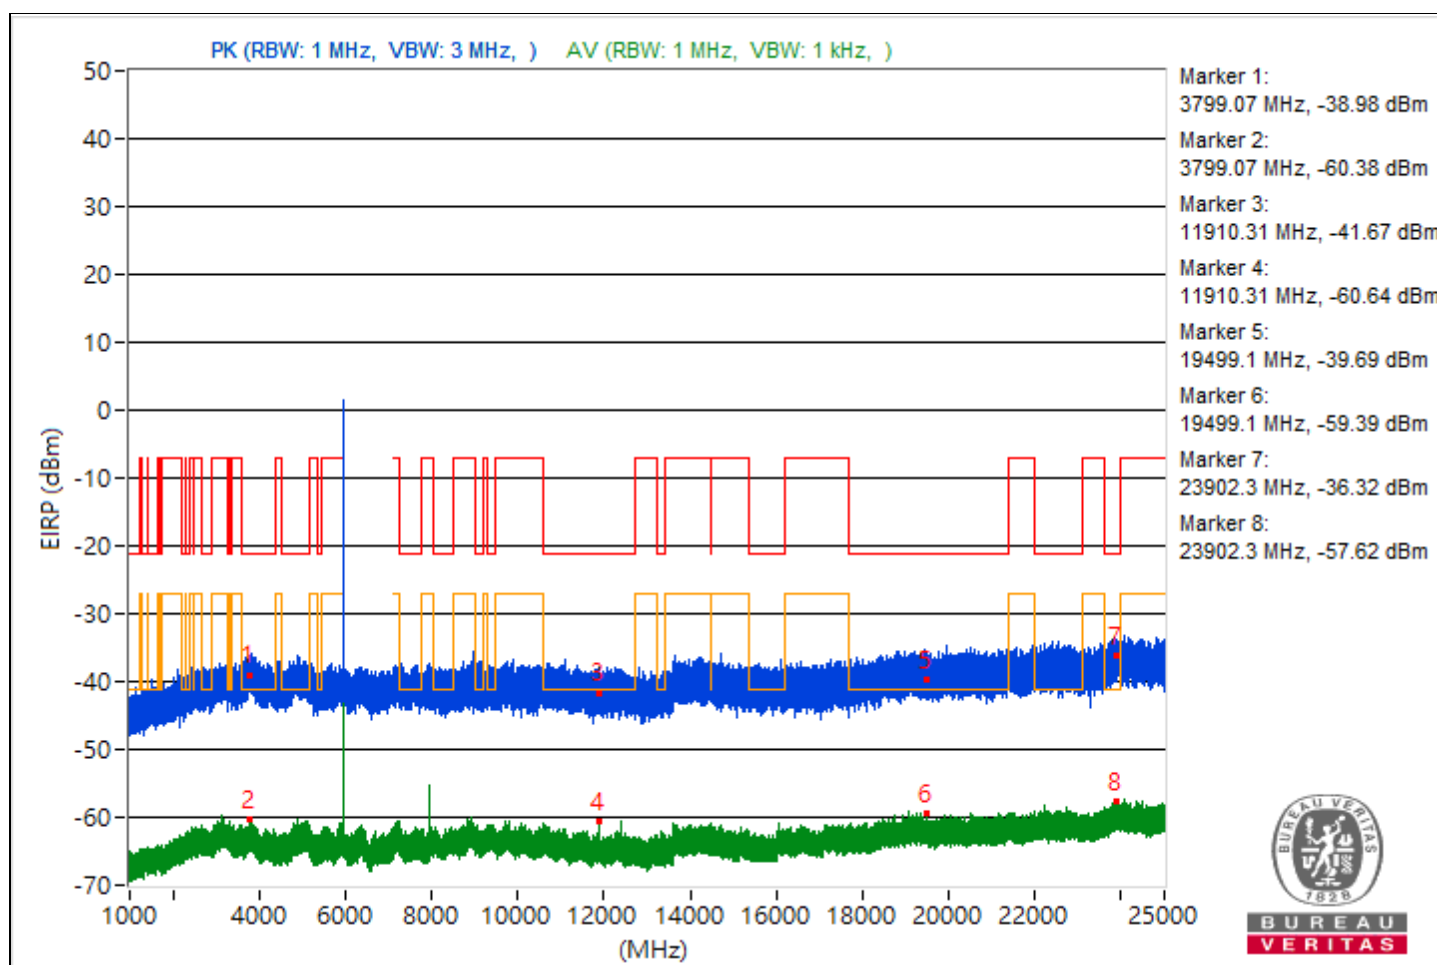


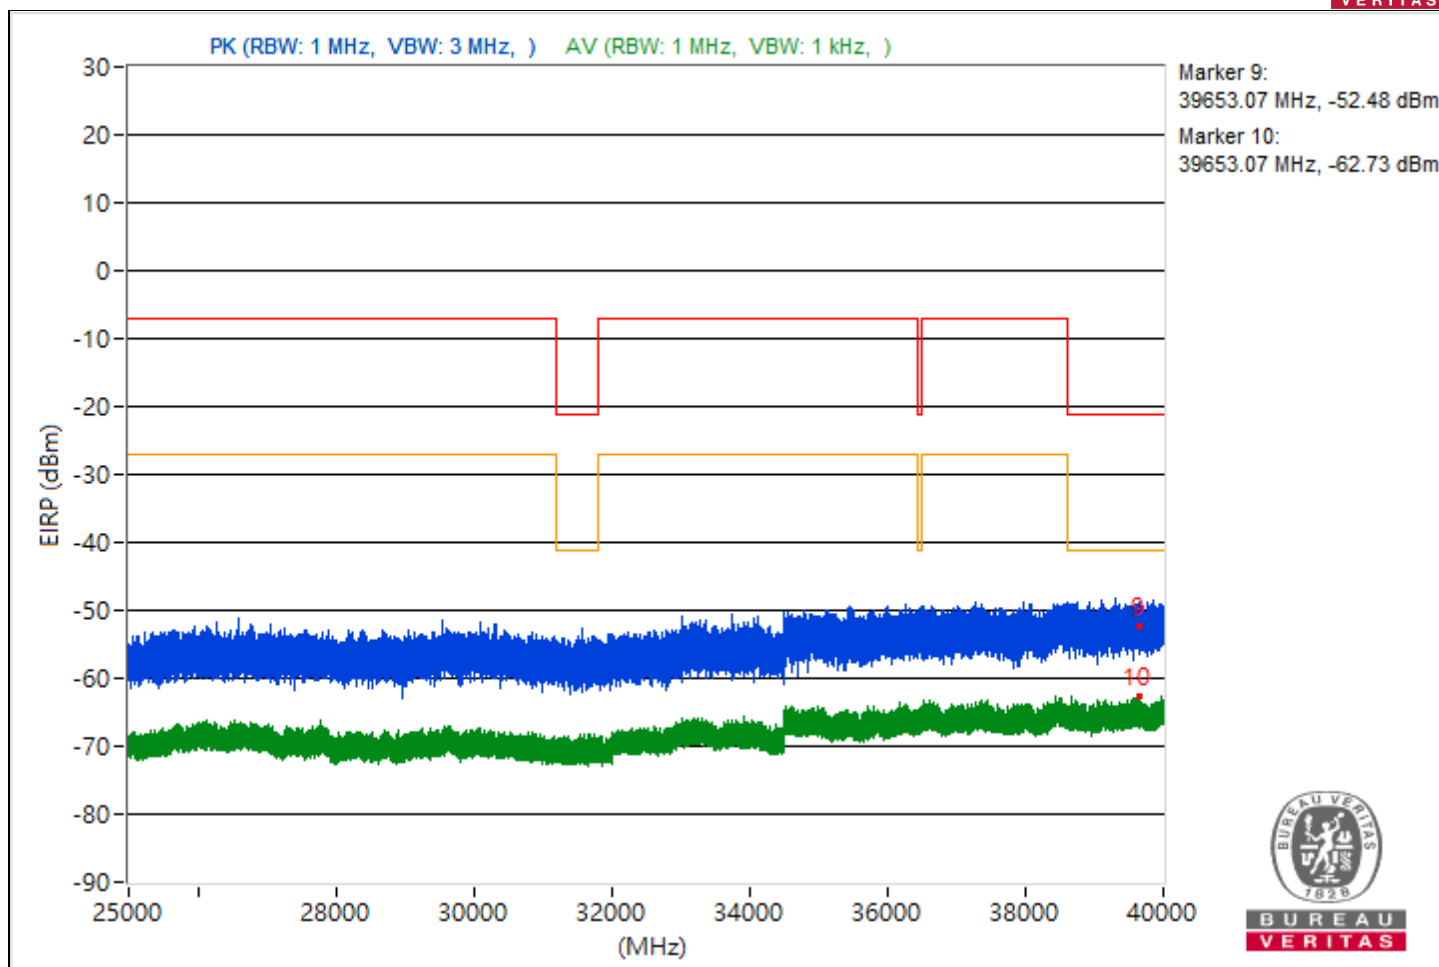


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4915.02	54.65 PK	74	-19.35	-53.84	-50.4	8.17	-40.61
2	4915.02	34.23 AV	54	-19.77	-71.08	-73.76	8.17	-61.03
3	12350.31	51.89 PK	74	-22.11	-54.38	-54.72	8.17	-43.37
4	12350.31	34.08 AV	54	-19.92	-76.57	-70.27	8.17	-61.18
5	20761.8	54.42 PK	74	-19.58	-53.06	-51.19	8.17	-40.84
6	20761.8	35.61 AV	54	-18.39	-74.11	-68.98	8.17	-59.65
7	23991.8	56.93 PK	74	-17.07	-48.58	-50.69	8.17	-38.33
8	23991.8	38.44 AV	54	-15.56	-67.73	-68.29	8.17	-56.82
9	39560.36	41.46 PK	74	-32.54	-68.41	-63.08	8.17	-53.8
10	39560.36	32.23 AV	54	-21.77	-77.07	-72.49	8.17	-63.03

Note: Margin value = Emission Level - Limit value

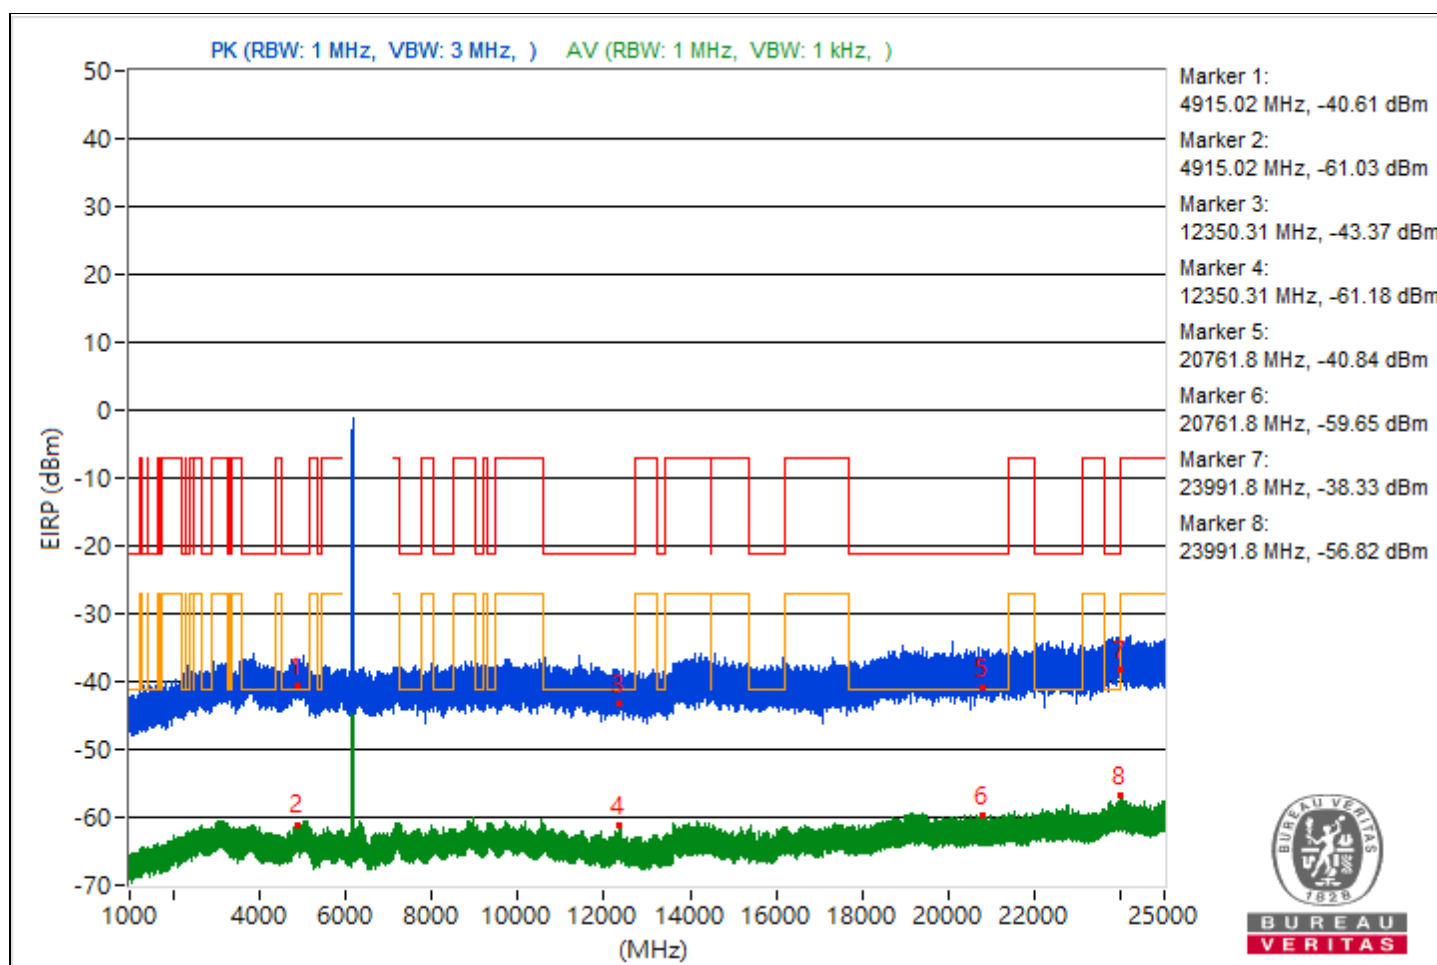


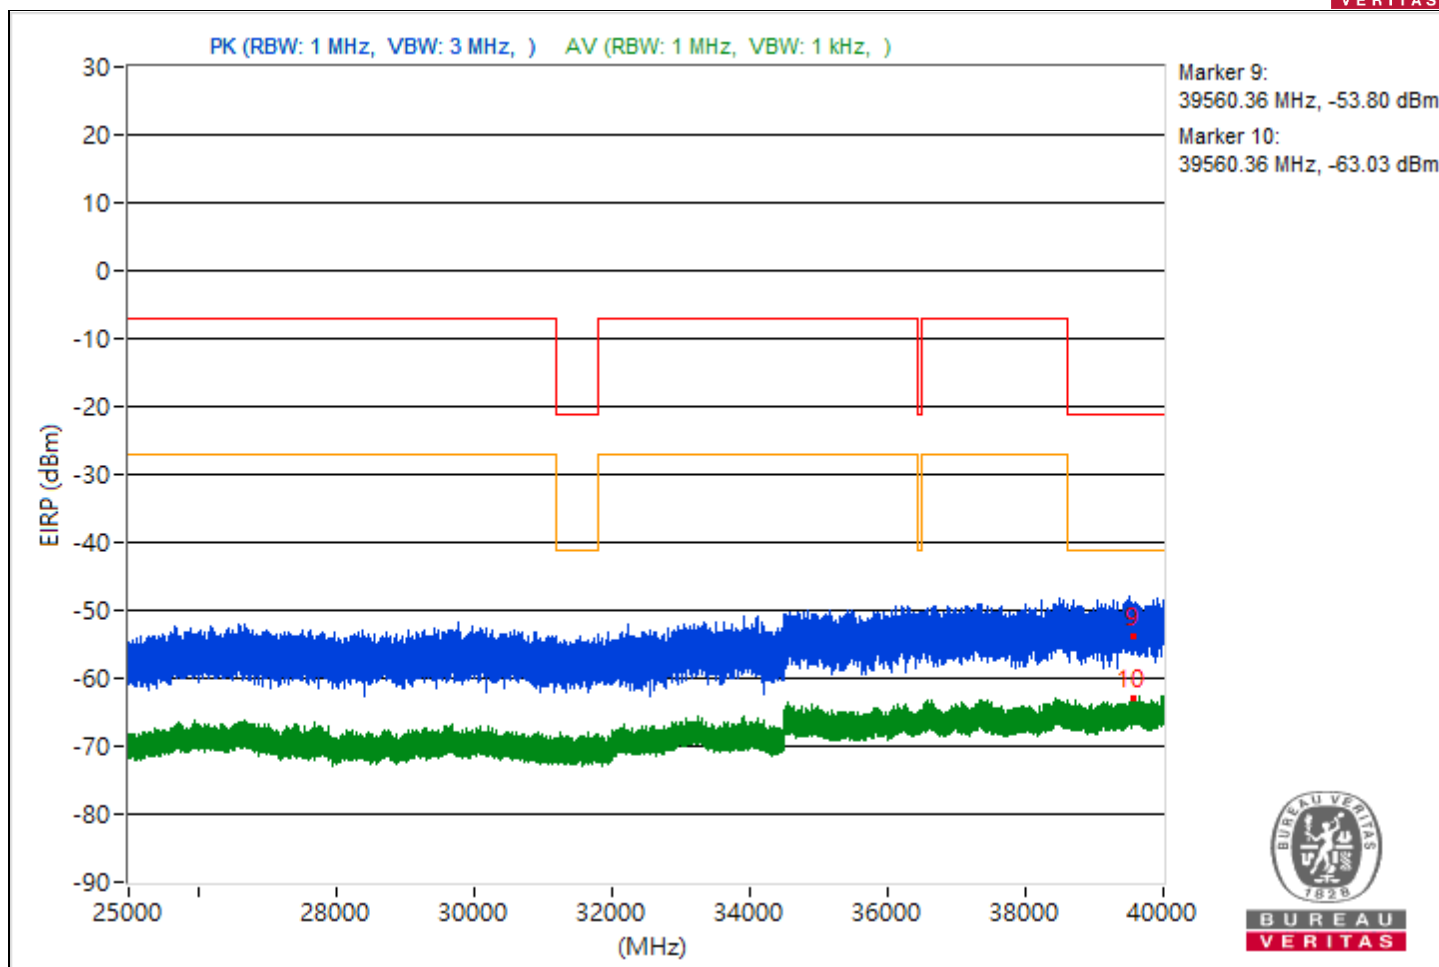


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4964.49	55.93 PK	74	-18.07	-53.45	-48.77	8.17	-39.33
2	4964.49	34.59 AV	54	-19.41	-70.48	-73.85	8.17	-60.67
3	7279.47	55.21 PK	74	-18.79	-51.52	-50.95	8.17	-40.05
4	7279.47	33.95 AV	54	-20.05	-71.49	-73.8	8.17	-61.31
5	20589.2	57.8 PK	74	-16.2	-47.03	-51.22	8.17	-37.46
6	20589.2	35.52 AV	54	-18.48	-69.32	-73.47	8.17	-59.74
7	23939.3	59.73 PK	74	-14.27	-48.25	-45.58	8.17	-35.53
8	23939.3	37.49 AV	54	-16.51	-67.82	-70.49	8.17	-57.77
9	39671.73	44.5 PK	74	-29.5	-60.84	-63.42	8.17	-50.76
10	39671.73	32.5 AV	54	-21.5	-75.78	-72.66	8.17	-62.76

Note: Margin value = Emission Level - Limit value

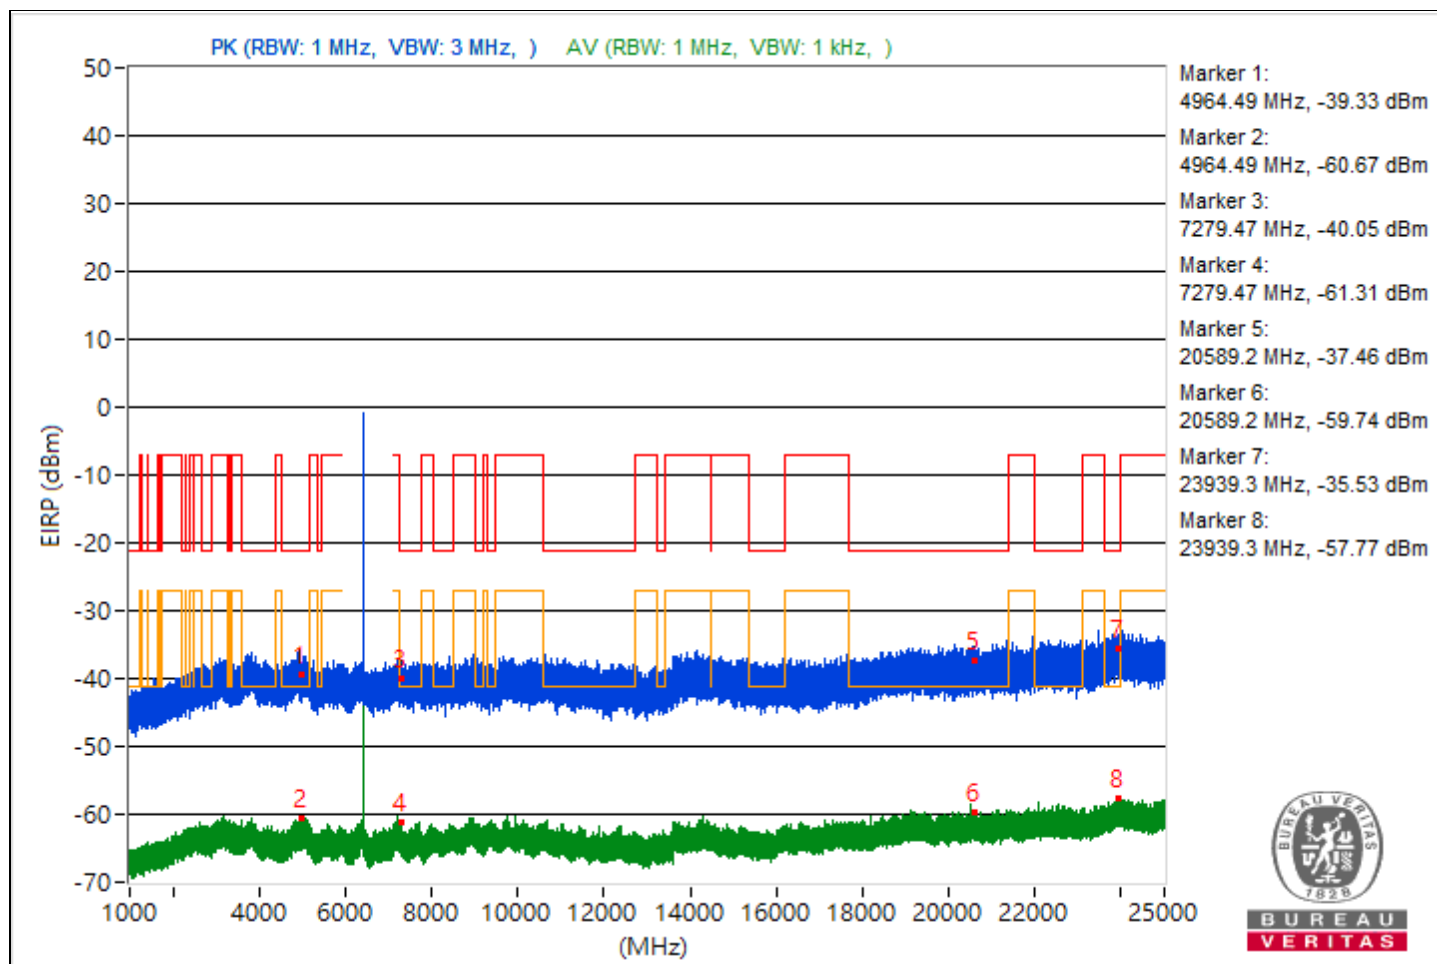


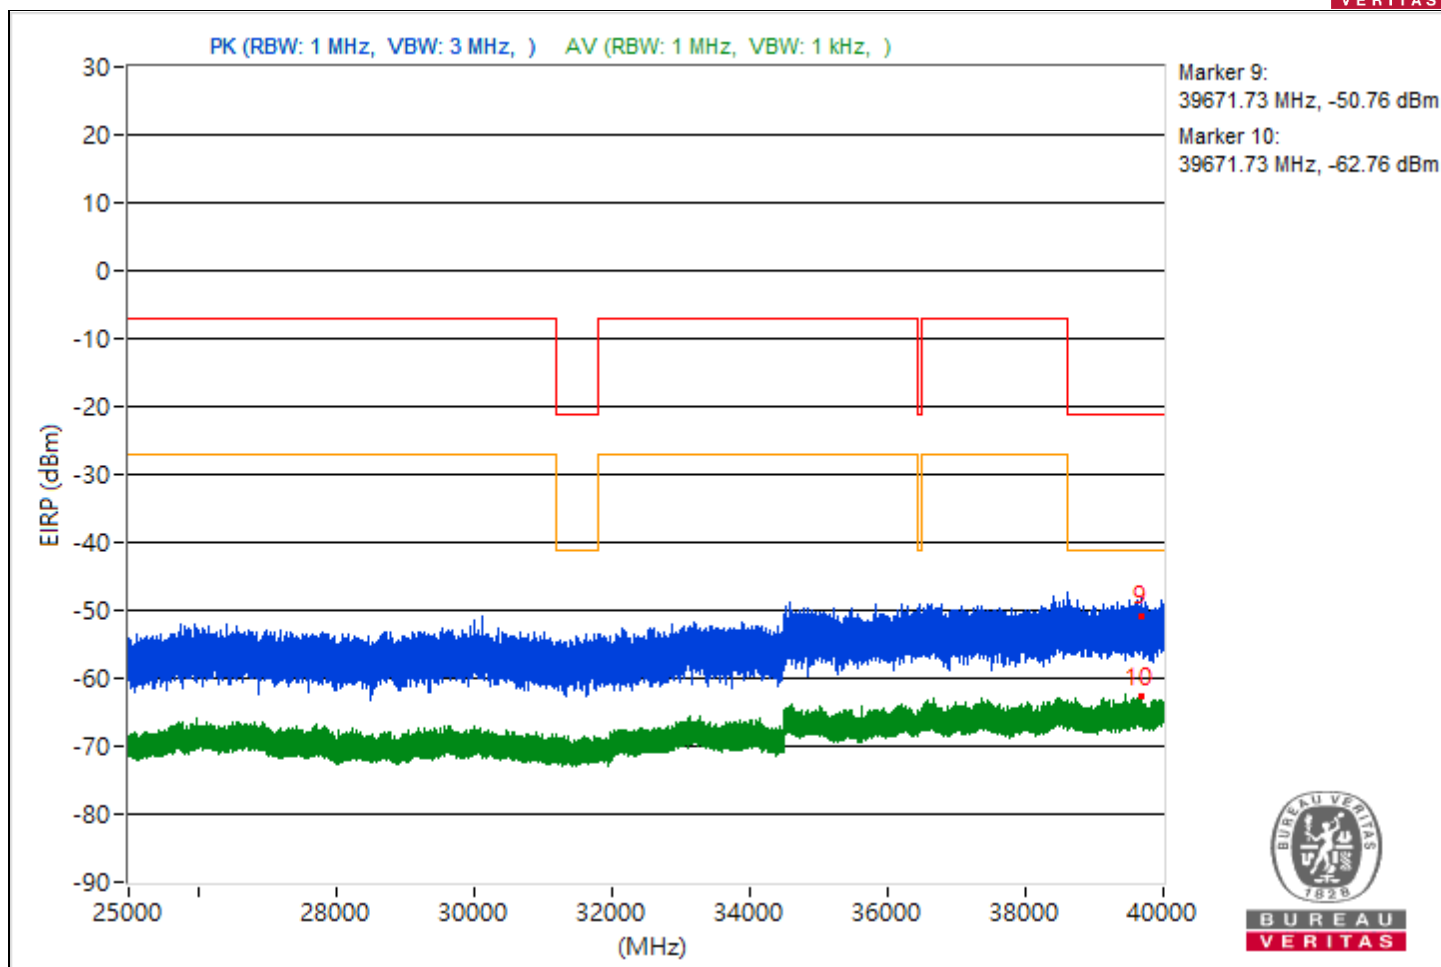


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4834.52	57.89 PK	74	-16.11	-48.88	-48.24	8.17	-37.37
2	4834.52	34.35 AV	54	-19.65	-74.77	-70.44	8.17	-60.91
3	9338.4	55.27 PK	74	-18.73	-50.82	-51.56	8.17	-39.99
4	9338.4	33.81 AV	54	-20.19	-71.03	-75.19	8.17	-61.45
5	21176.1	55.94 PK	74	-18.06	-50.98	-50.07	8.17	-39.32
6	21176.1	35.69 AV	54	-18.31	-68.79	-74.43	8.17	-59.57
7	23944.9	58.01 PK	74	-15.99	-48.26	-48.62	8.17	-37.25
8	23944.9	37.48 AV	54	-16.52	-69.82	-68.24	8.17	-57.78
9	39556.18	42.48 PK	74	-31.52	-63.53	-64.45	8.17	-52.78
10	39556.18	32.47 AV	54	-21.53	-72.18	-77.04	8.17	-62.79

Note: Margin value = Emission Level - Limit value

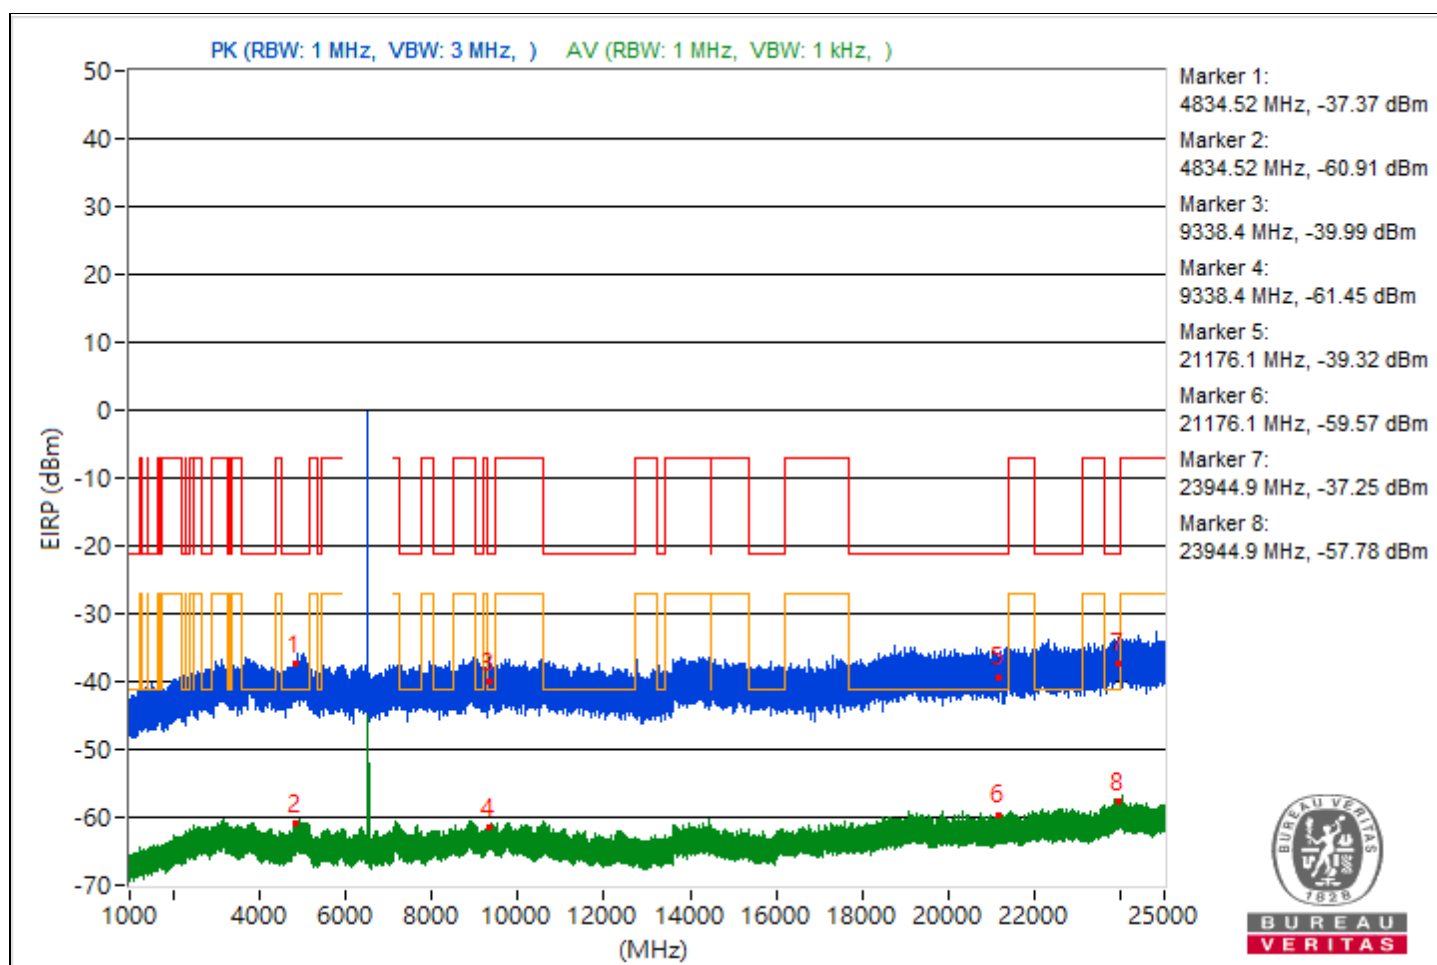


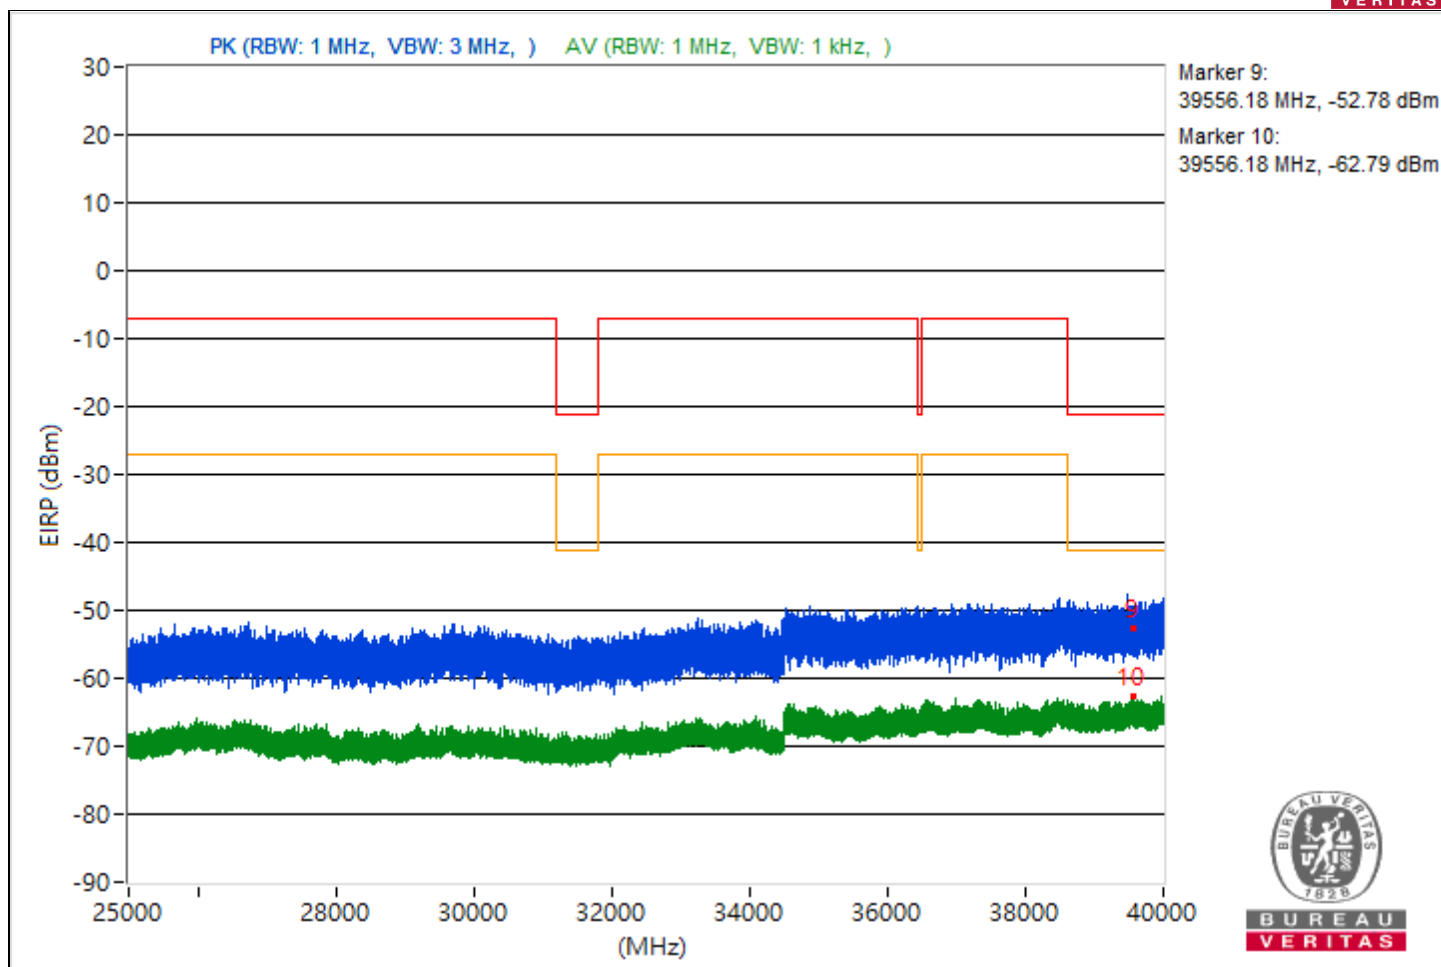


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5028.03	54.25 PK	74	-19.75	-51.03	-53.77	8.17	-41.01
2	5028.03	34.68 AV	54	-19.32	-73.76	-70.4	8.17	-60.58
3	9009.69	54.67 PK	74	-19.33	-51.1	-52.57	8.17	-40.59
4	9009.69	33.78 AV	54	-20.22	-74.97	-71.17	8.17	-61.48
5	19196.5	55.97 PK	74	-18.03	-53.6	-48.67	8.17	-39.29
6	19196.5	35.47 AV	54	-18.53	-68.97	-74.78	8.17	-59.79
7	23944.5	56.58 PK	74	-17.42	-50.16	-49.59	8.17	-38.68
8	23944.5	37.17 AV	54	-16.83	-67.55	-72.17	8.17	-58.09
9	39423.38	43.66 PK	74	-30.34	-64.89	-61.37	8.17	-51.6
10	39423.38	32.31 AV	54	-21.69	-75.23	-73.26	8.17	-62.95

Note: Margin value = Emission Level - Limit value

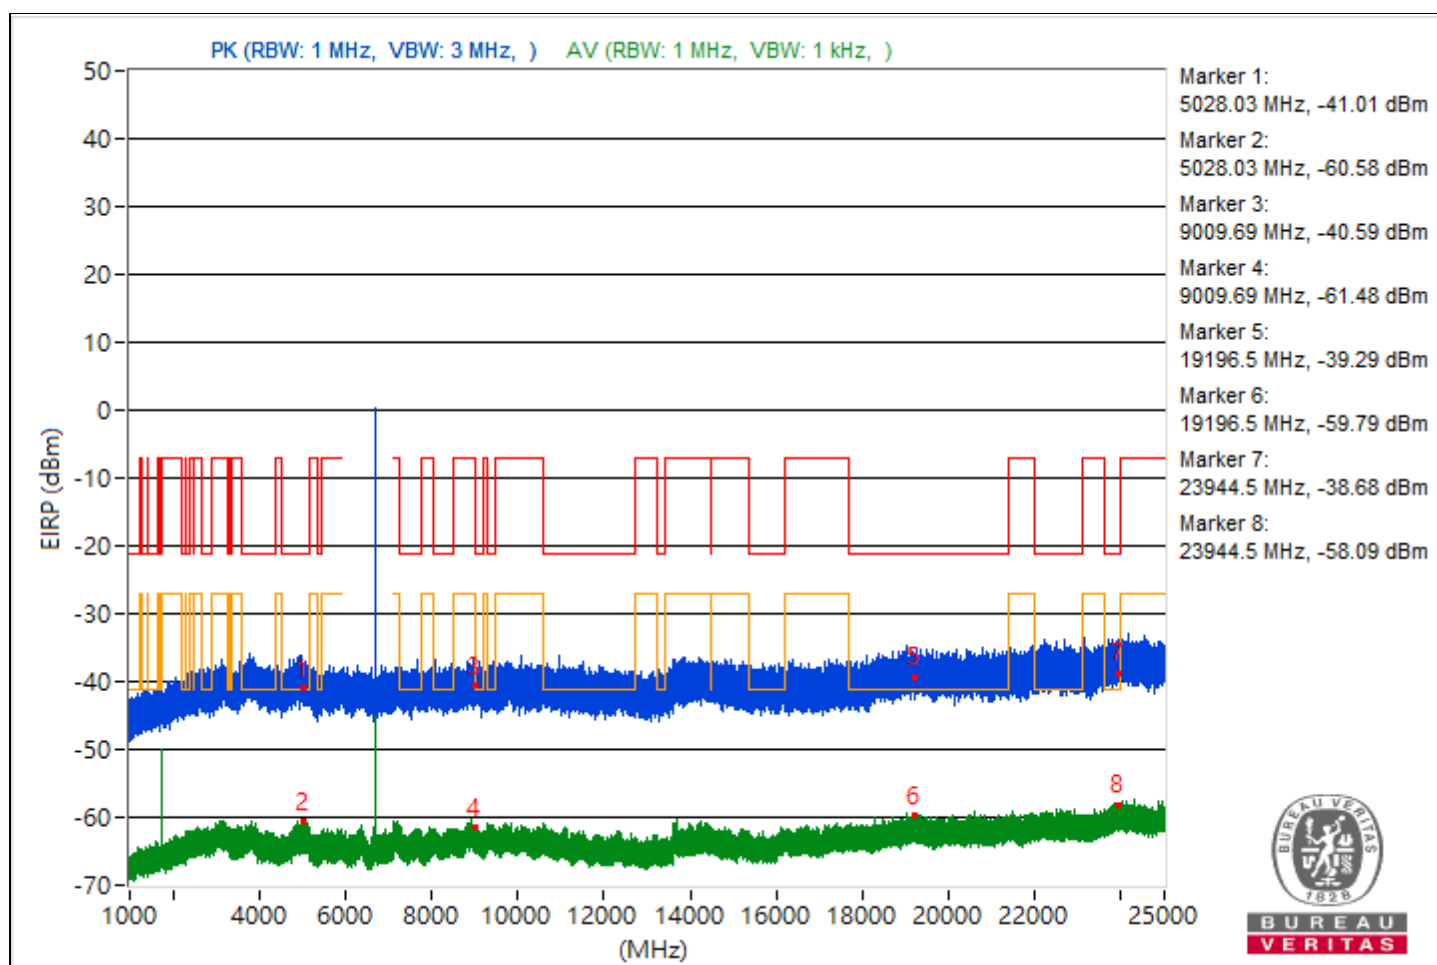


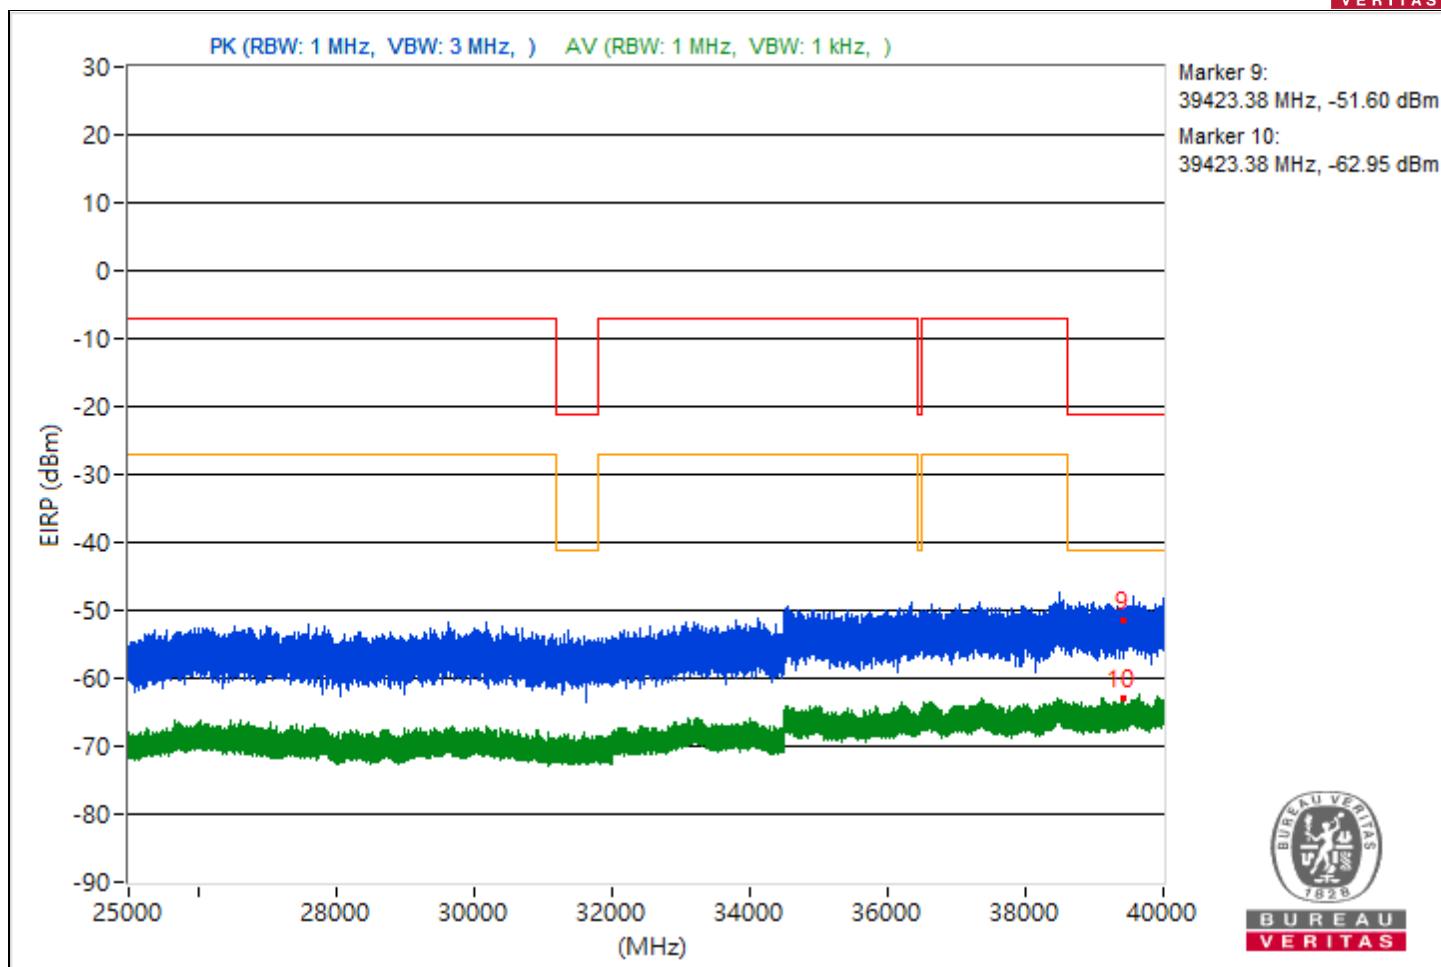


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4878.47	54.29 PK	74	-19.71	-53.04	-51.41	8.17	-40.97
2	4878.47	34.23 AV	54	-19.77	-75.68	-70.31	8.17	-61.03
3	9366.31	55.93 PK	74	-18.07	-51.68	-49.59	8.17	-39.33
4	9366.31	34.47 AV	54	-19.53	-70.99	-73.24	8.17	-60.79
5	20510.5	57.35 PK	74	-16.65	-52.48	-47.21	8.17	-37.91
6	20510.5	35.91 AV	54	-18.09	-69.35	-72.16	8.17	-59.35
7	23993.2	59.46 PK	74	-14.54	-46.61	-47.39	8.17	-35.8
8	23993.2	37.73 AV	54	-16.27	-67.86	-69.77	8.17	-57.53
9	39832.27	40.83 PK	74	-33.17	-65.64	-65.58	8.17	-54.43
10	39832.27	32 AV	54	-22	-72.93	-76.78	8.17	-63.26

Note: Margin value = Emission Level - Limit value

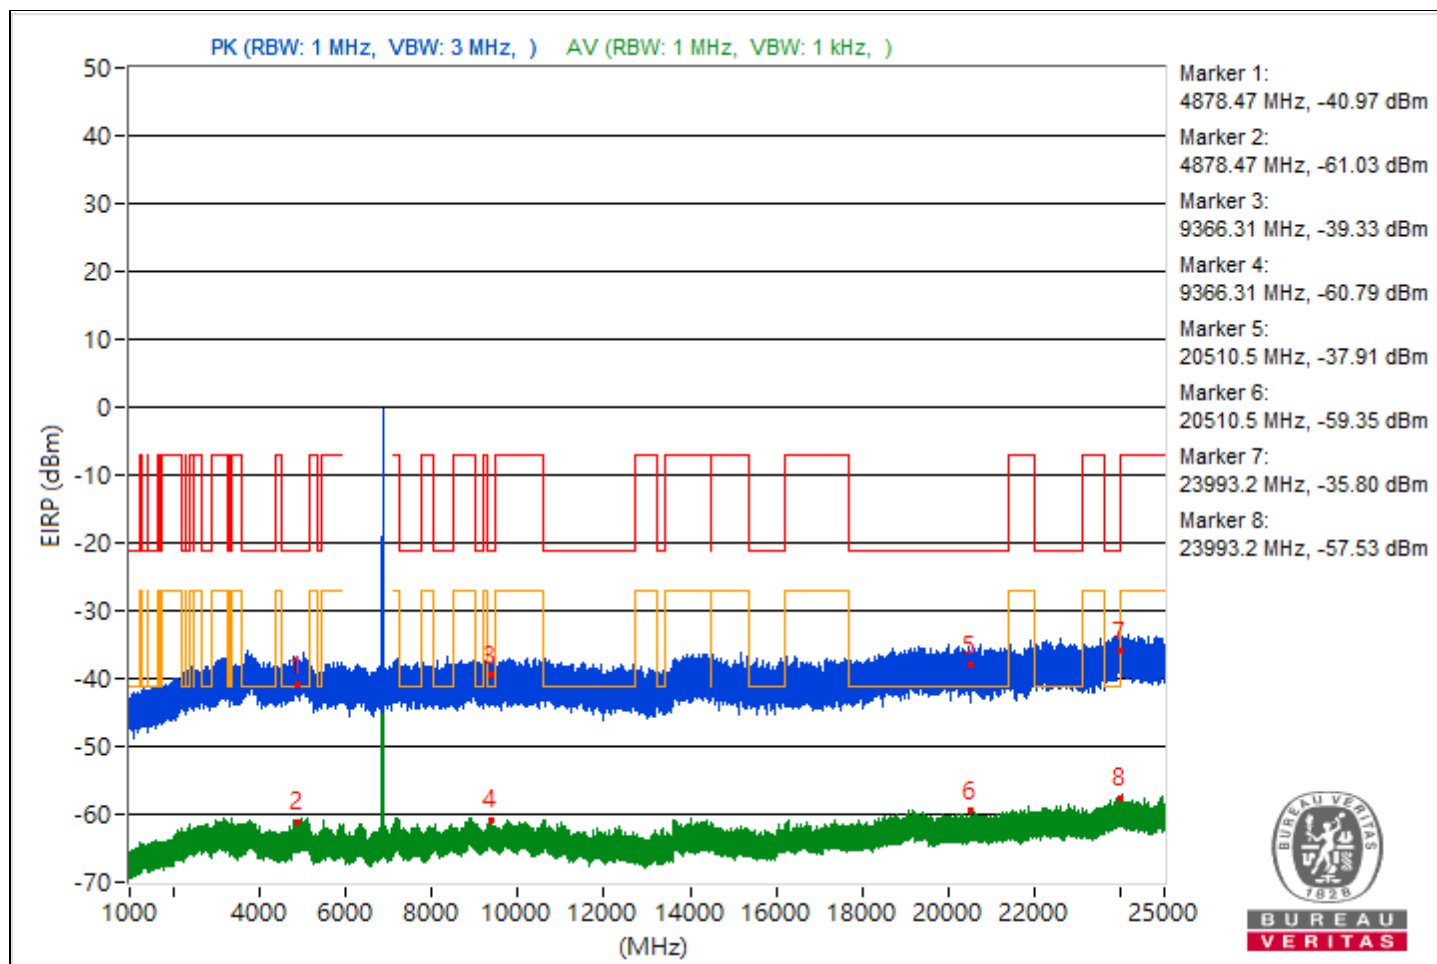


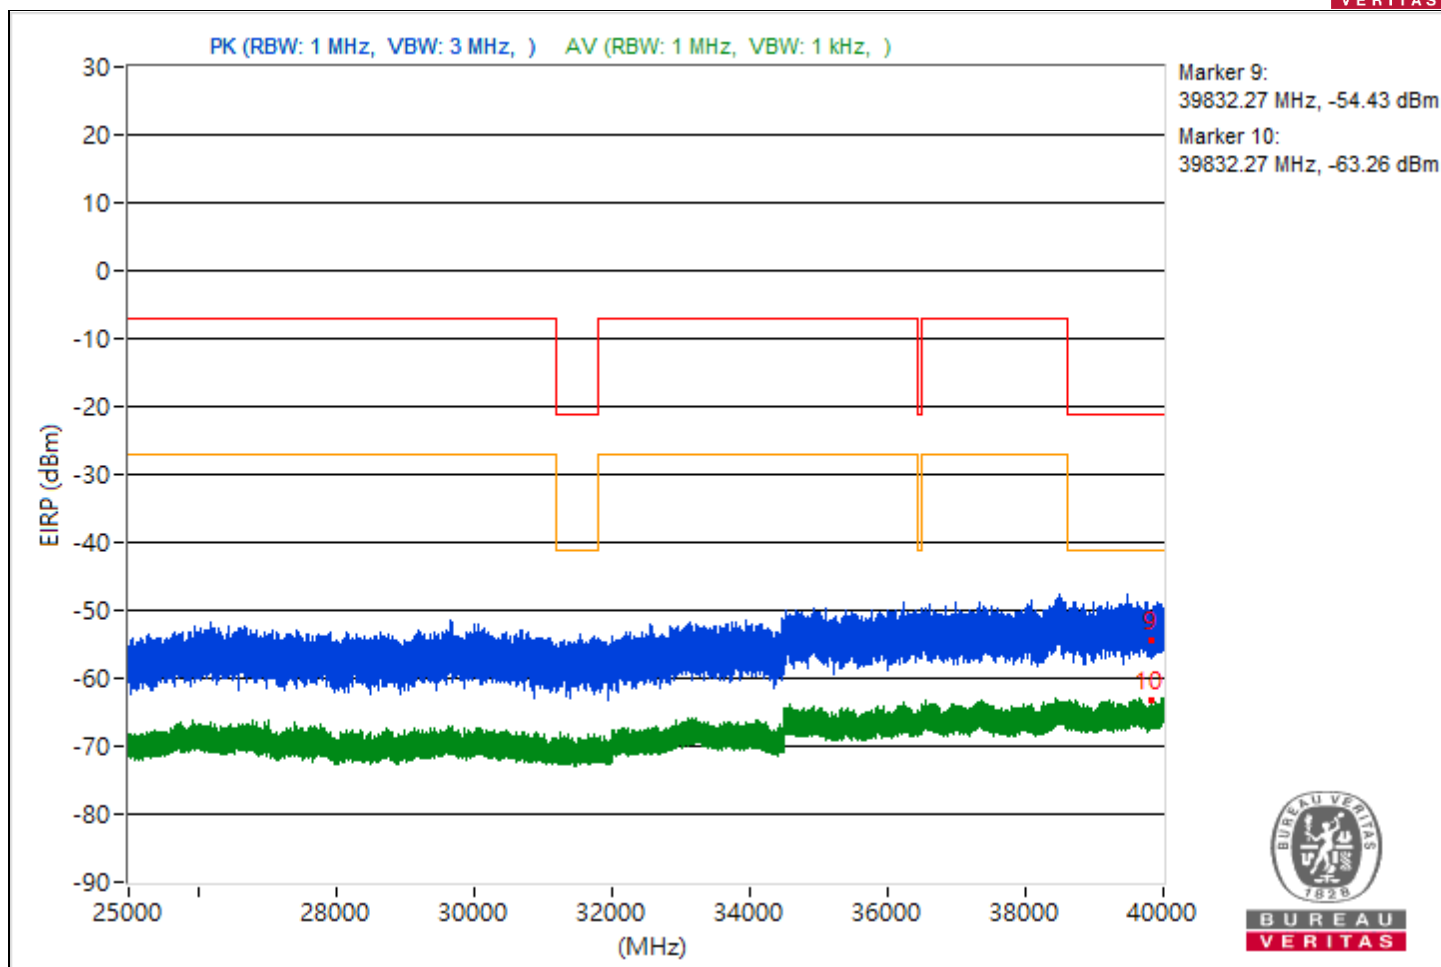


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5023.44	55.46 PK	74	-18.54	-49.69	-52.83	8.17	-39.8
2	5023.44	34.34 AV	54	-19.66	-74.92	-70.41	8.17	-60.92
3	11870.4	53.08 PK	74	-20.92	-53.35	-53.36	8.17	-42.18
4	11870.4	34.53 AV	54	-19.47	-77.1	-69.61	8.17	-60.73
5	21214	57.84 PK	74	-16.16	-47.57	-49.96	8.17	-37.42
6	21214	35.88 AV	54	-18.12	-72.89	-69.06	8.17	-59.38
7	23774.6	57.69 PK	74	-16.31	-47.36	-50.8	8.17	-37.57
8	23774.6	37.27 AV	54	-16.73	-67.82	-71.13	8.17	-57.99
9	39916.62	43.74 PK	74	-30.26	-61.81	-63.81	8.17	-51.52
10	39916.62	32.03 AV	54	-21.97	-72.92	-76.72	8.17	-63.23

Note: Margin value = Emission Level - Limit value

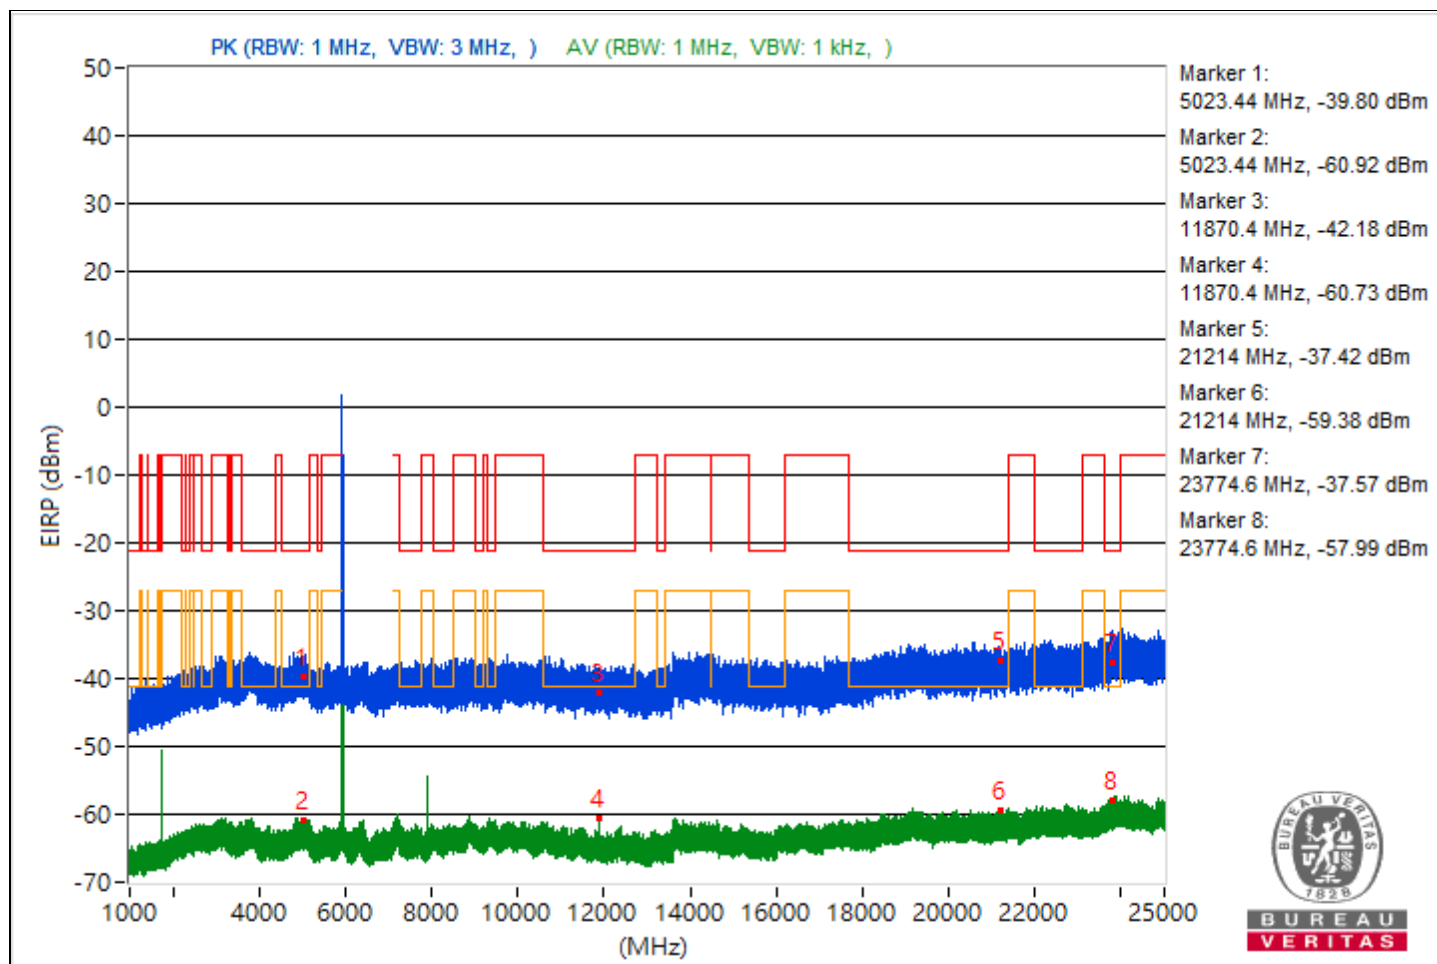


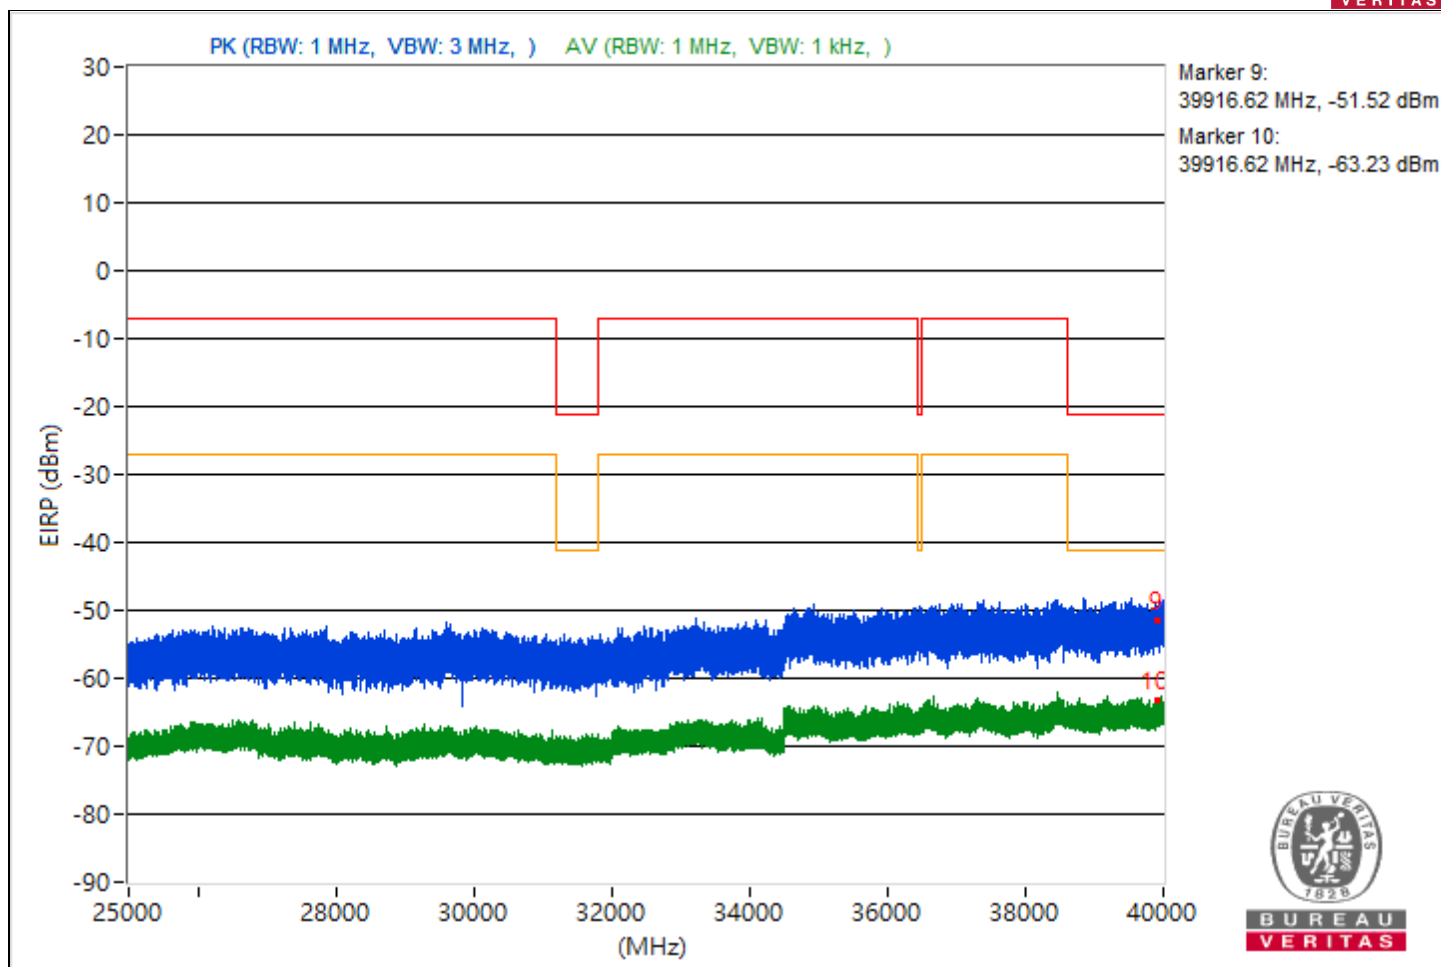


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5074.86	55.28 PK	74	-18.72	-50.59	-51.82	8.17	-39.98
2	5074.86	34.69 AV	54	-19.31	-70.46	-73.59	8.17	-60.57
3	11910.04	53.03 PK	74	-20.97	-53.75	-53.09	8.17	-42.23
4	11910.04	35.43 AV	54	-18.57	-74.79	-69.02	8.17	-59.83
5	19444	56.03 PK	74	-17.97	-53.85	-48.52	8.17	-39.23
6	19444	36 AV	54	-18	-71.72	-69.45	8.17	-59.26
7	23896.8	56.91 PK	74	-17.09	-50.1	-49.02	8.17	-38.35
8	23896.8	37.22 AV	54	-16.78	-70.77	-68.08	8.17	-58.04
9	39610.22	44.15 PK	74	-29.85	-62.81	-61.82	8.17	-51.11
10	39610.22	32.34 AV	54	-21.66	-76.67	-72.5	8.17	-62.92

Note: Margin value = Emission Level - Limit value

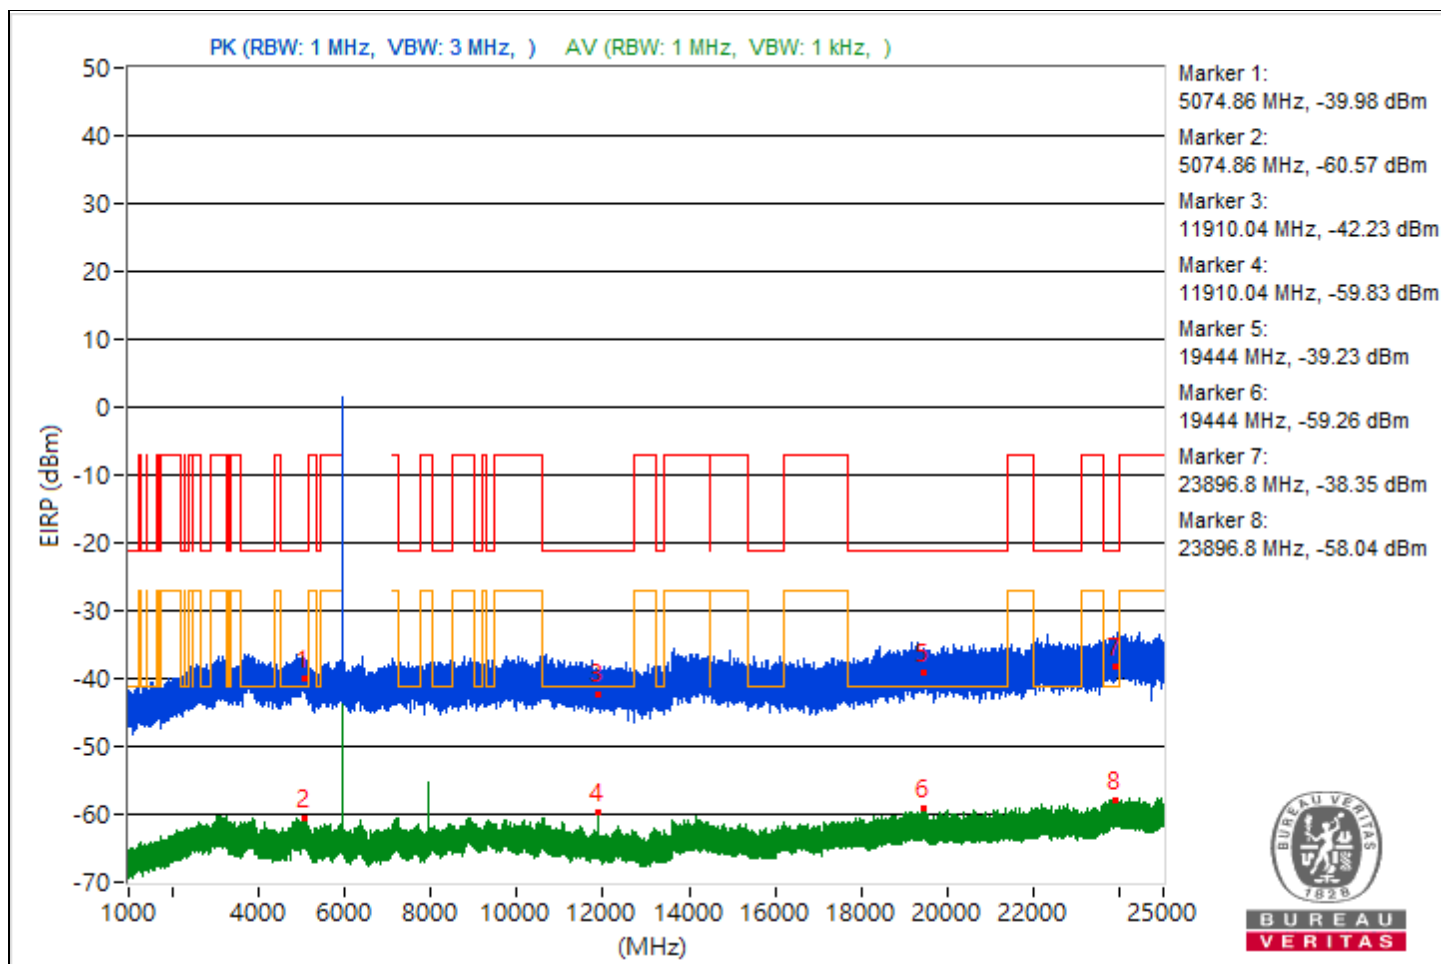


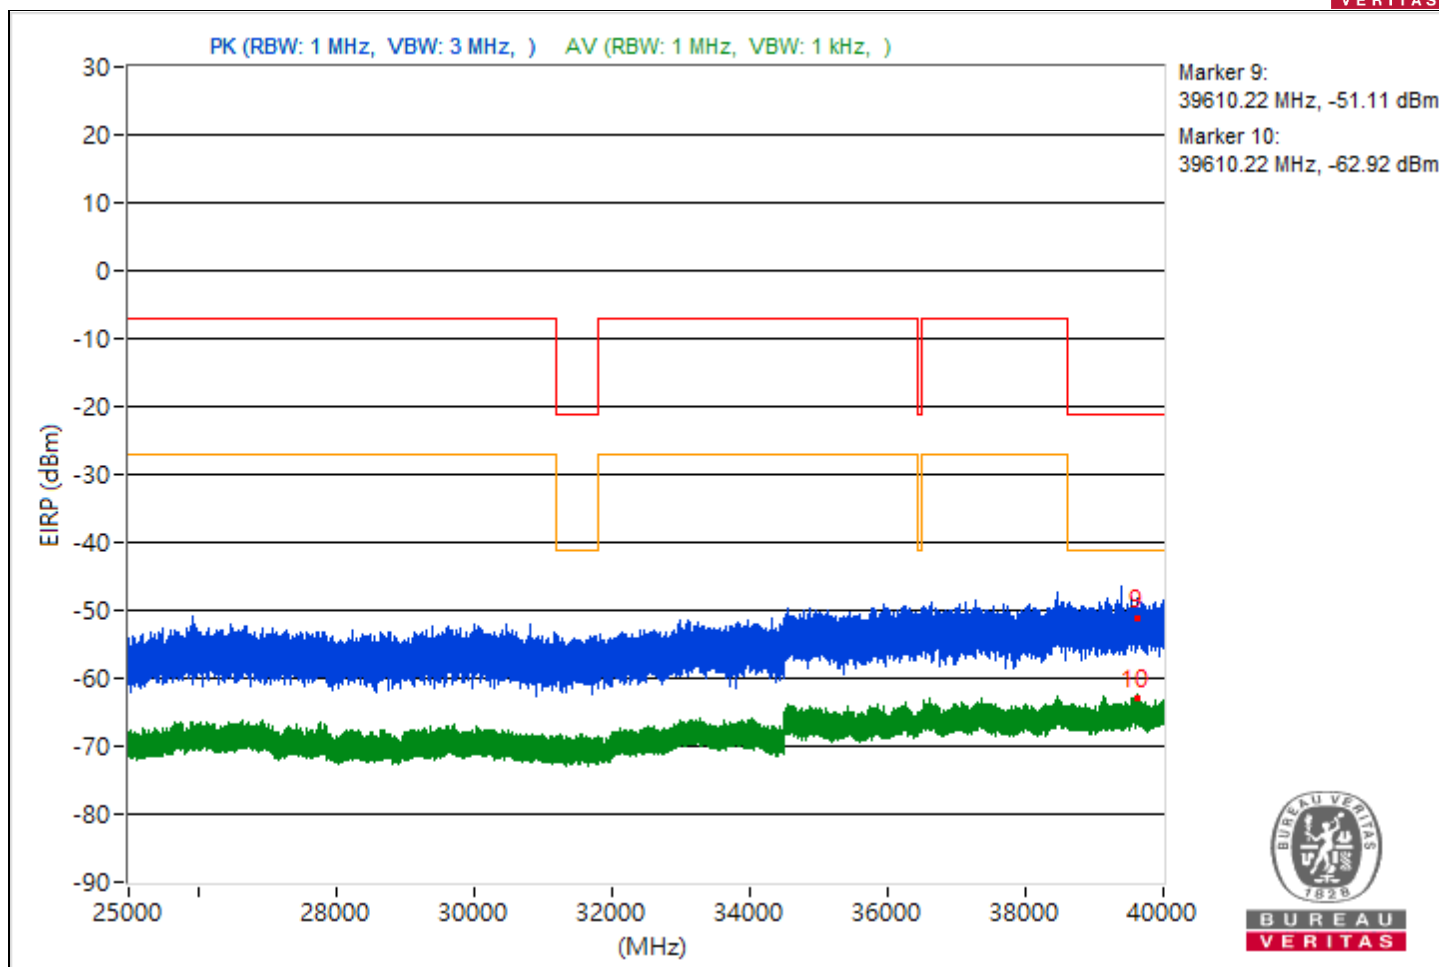


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5045.07	54.76 PK	74	-19.24	-53.32	-50.5	8.17	-40.5
2	5045.07	34.71 AV	54	-19.29	-70.32	-73.84	8.17	-60.55
3	12349.96	54.46 PK	74	-19.54	-52.96	-51.18	8.17	-40.8
4	12349.96	35.05 AV	54	-18.95	-73.14	-70.14	8.17	-60.21
5	21373.2	59.26 PK	74	-14.74	-47.09	-47.26	8.17	-36
6	21373.2	37.33 AV	54	-16.67	-68.81	-69.44	8.17	-57.93
7	24000	58.52 PK	74	-15.48	-47.5	-48.38	8.17	-36.74
8	24000	37.32 AV	54	-16.68	-71.52	-67.59	8.17	-57.94
9	39661.69	43.81 PK	74	-30.19	-62.84	-62.42	8.17	-51.45
10	39661.69	32.29 AV	54	-21.71	-76.57	-72.61	8.17	-62.97

Note: Margin value = Emission Level - Limit value

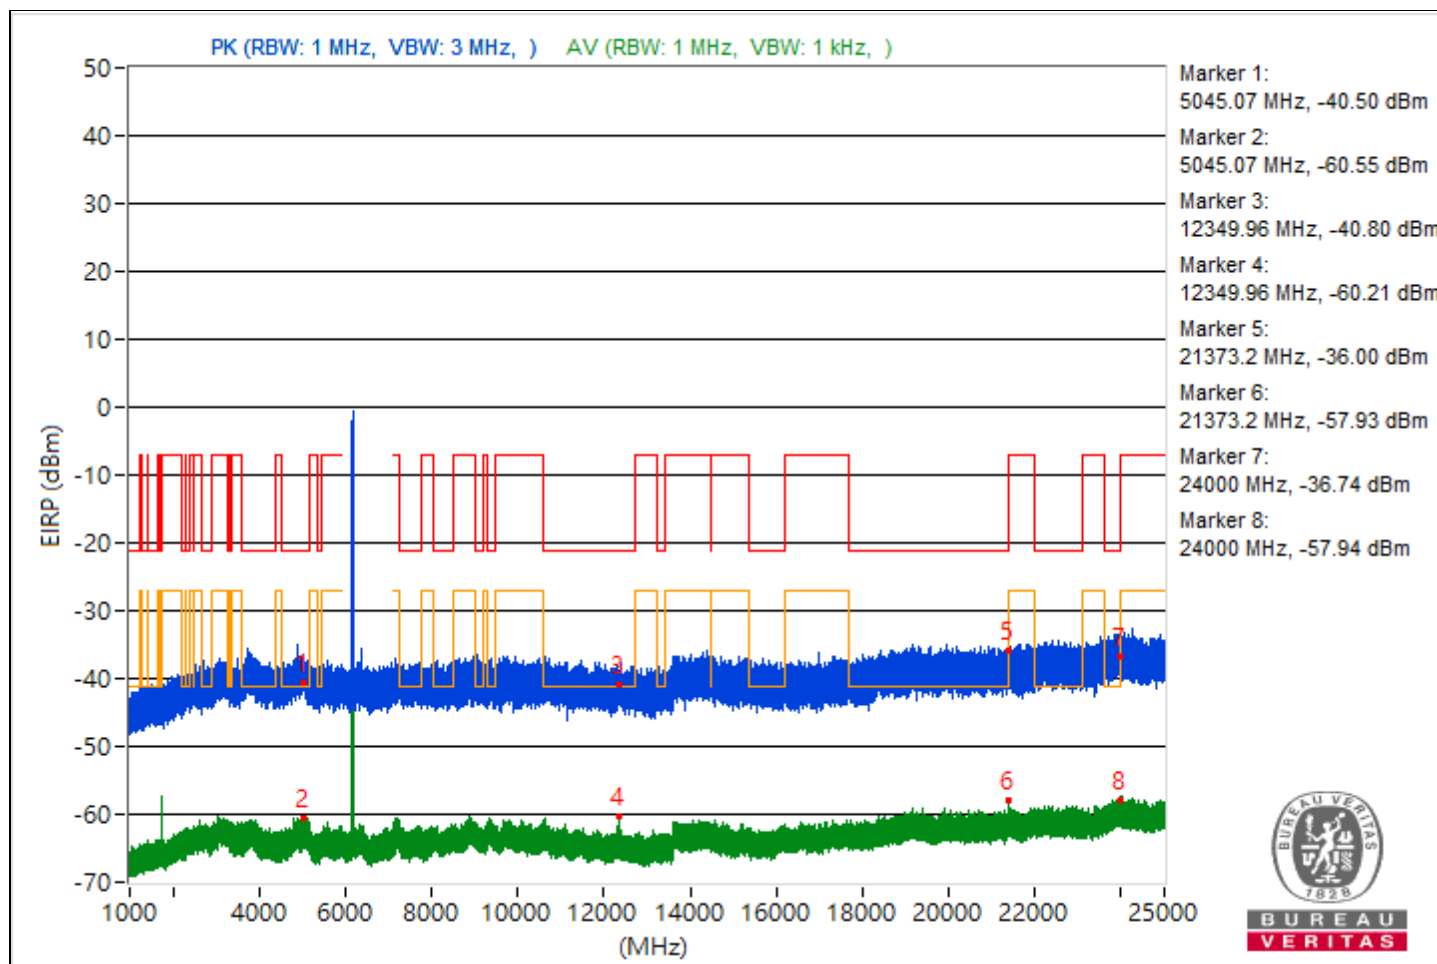


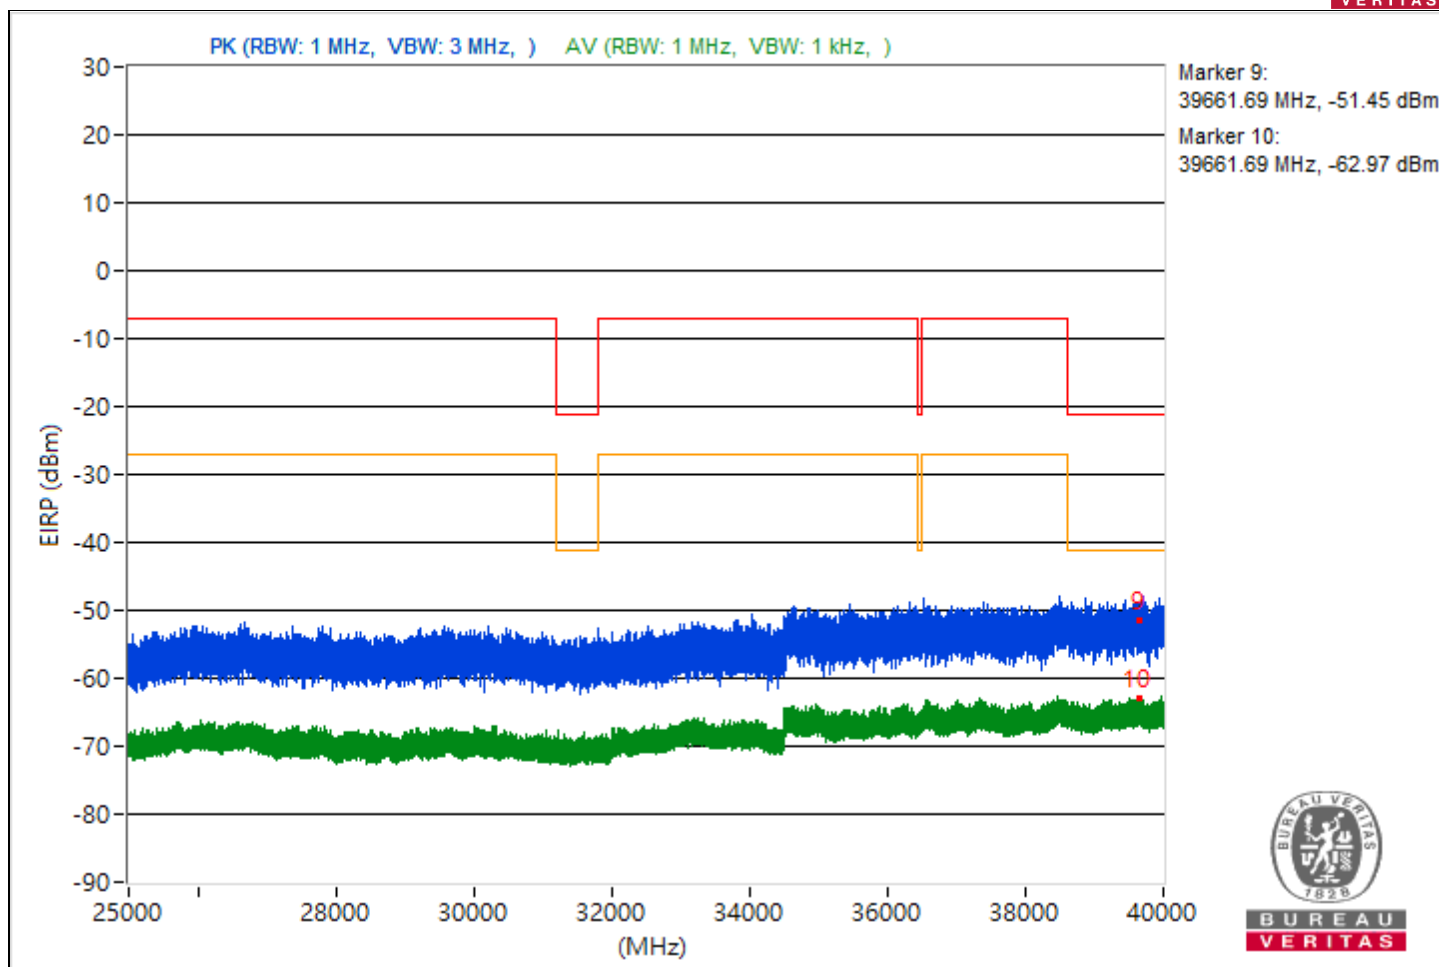


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3645.92	54.59 PK	74	-19.41	-51.21	-52.6	8.17	-40.67
2	3645.92	35.2 AV	54	-18.8	-70.04	-72.91	8.17	-60.06
3	10651.73	54.19 PK	74	-19.81	-52.41	-52.09	8.17	-41.07
4	10651.73	35.39 AV	54	-18.61	-71.18	-70.92	8.17	-59.87
5	20536	55.97 PK	74	-18.03	-51.47	-49.66	8.17	-39.29
6	20536	35.87 AV	54	-18.13	-68.67	-74.02	8.17	-59.39
7	23970.8	57.65 PK	74	-16.35	-49.94	-47.88	8.17	-37.61
8	23970.8	37.44 AV	54	-16.56	-67.45	-71.41	8.17	-57.82
9	39567.11	42.13 PK	74	-31.87	-65.92	-63.14	8.17	-53.13
10	39567.11	32.76 AV	54	-21.24	-72.53	-75.25	8.17	-62.5

Note: Margin value = Emission Level - Limit value

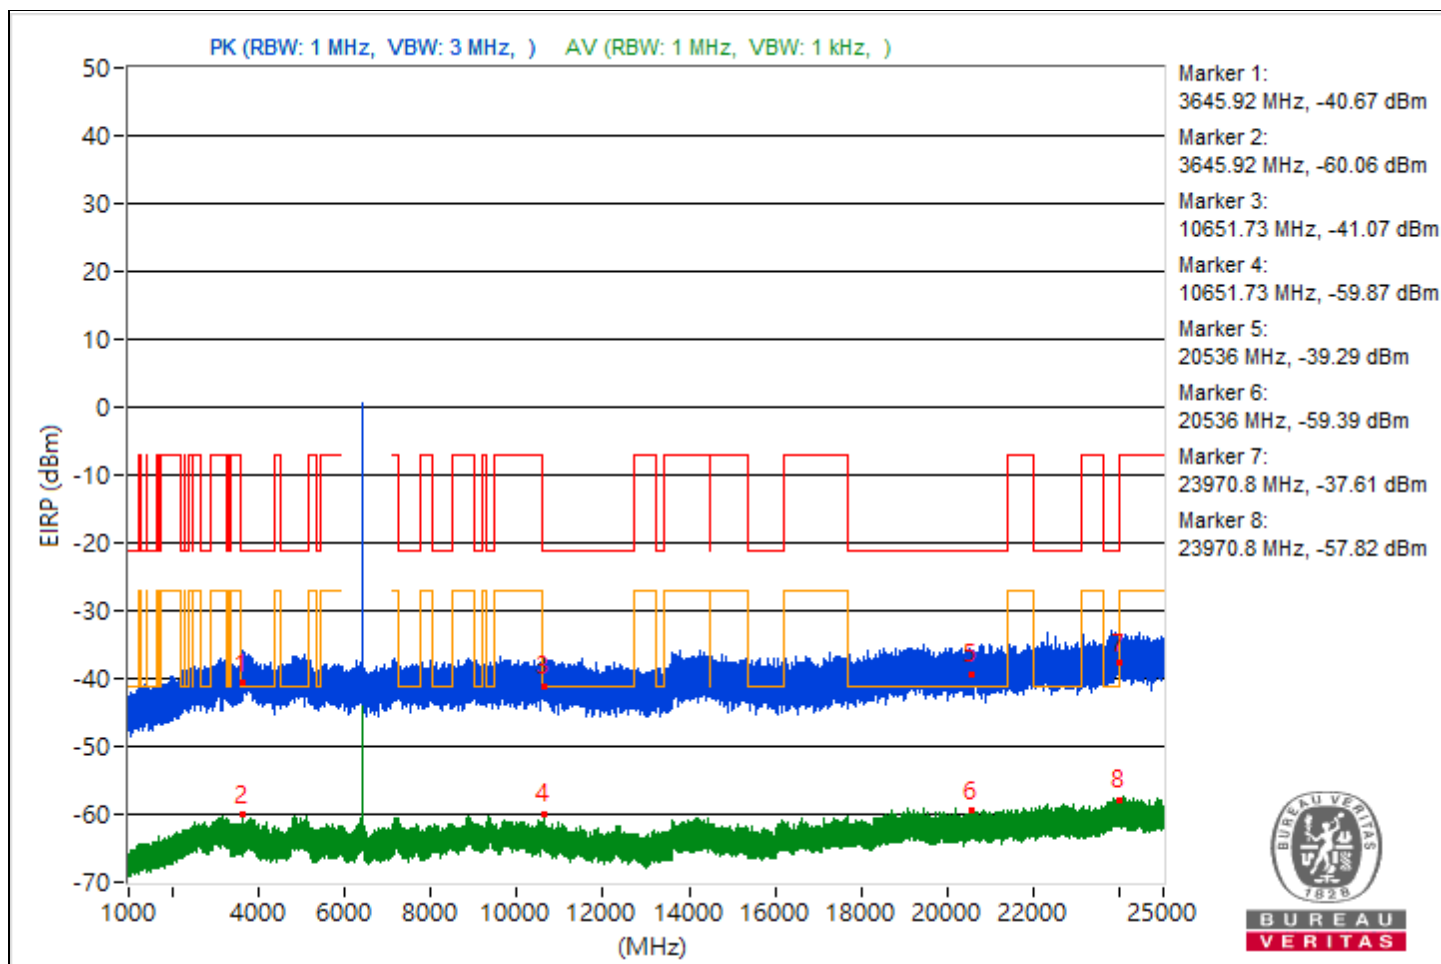


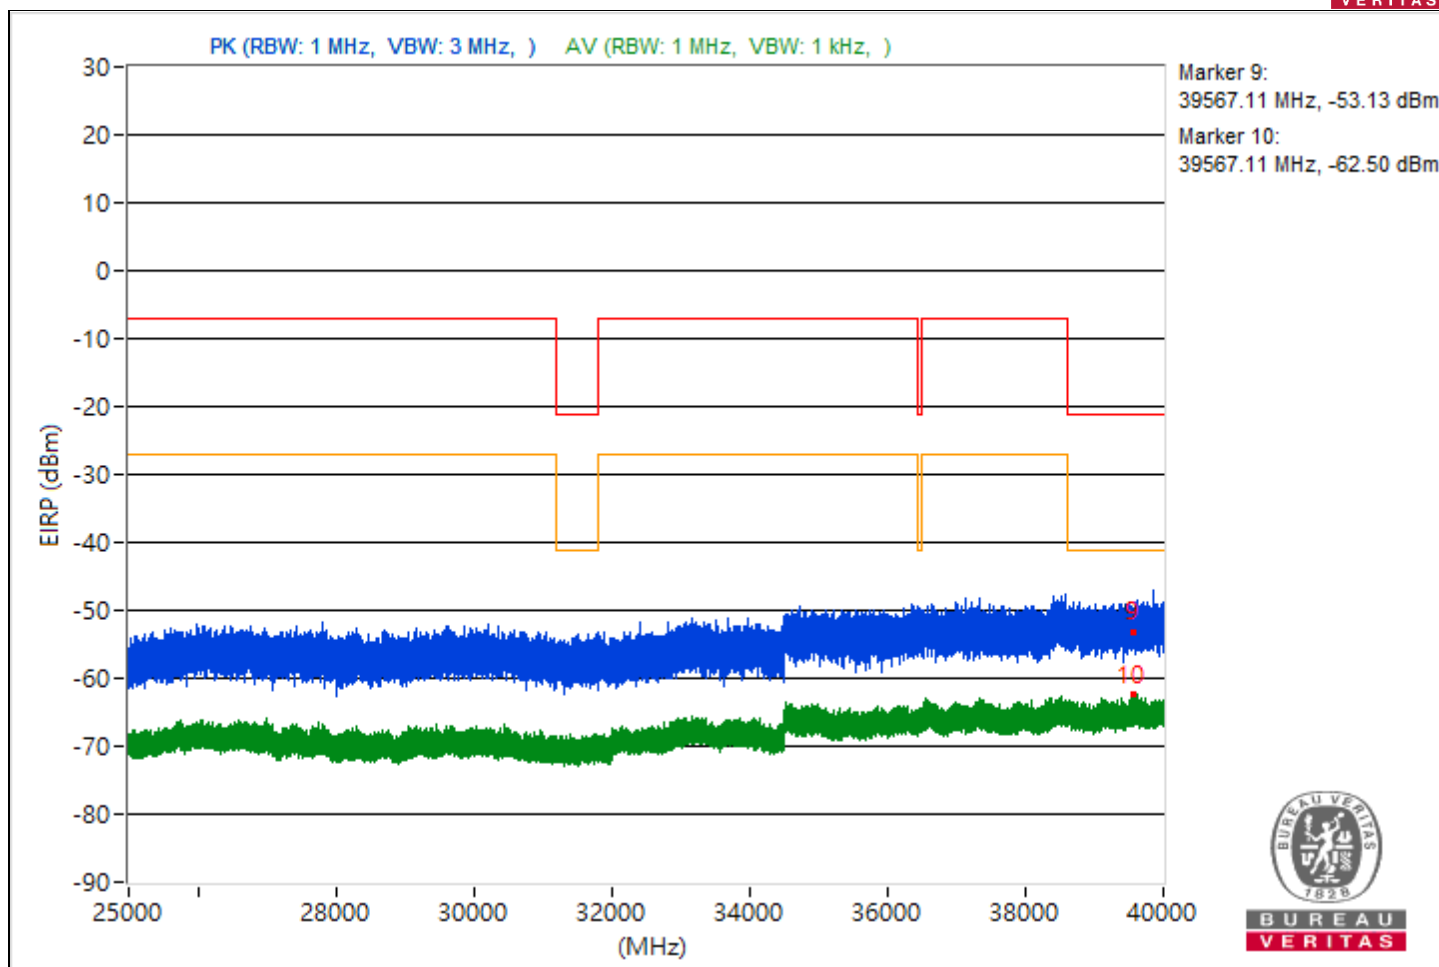


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3745.32	56.01 PK	74	-17.99	-50.18	-50.7	8.17	-39.25
2	3745.32	34.81 AV	54	-19.19	-75.04	-69.75	8.17	-60.45
3	9364	56.18 PK	74	-17.82	-51.45	-49.33	8.17	-39.08
4	9364	34.82 AV	54	-19.18	-72.81	-70.68	8.17	-60.44
5	19131.8	56.72 PK	74	-17.28	-48.49	-51.44	8.17	-38.54
6	19131.8	36.27 AV	54	-17.73	-73.45	-68.32	8.17	-58.99
7	23972.2	57.67 PK	74	-16.33	-49.21	-48.37	8.17	-37.59
8	23972.2	37.76 AV	54	-16.24	-70.82	-67.26	8.17	-57.5
9	39990.84	42.72 PK	74	-31.28	-64.77	-62.88	8.17	-52.54
10	39990.84	32.44 AV	54	-21.56	-76.39	-72.46	8.17	-62.82

Note: Margin value = Emission Level - Limit value

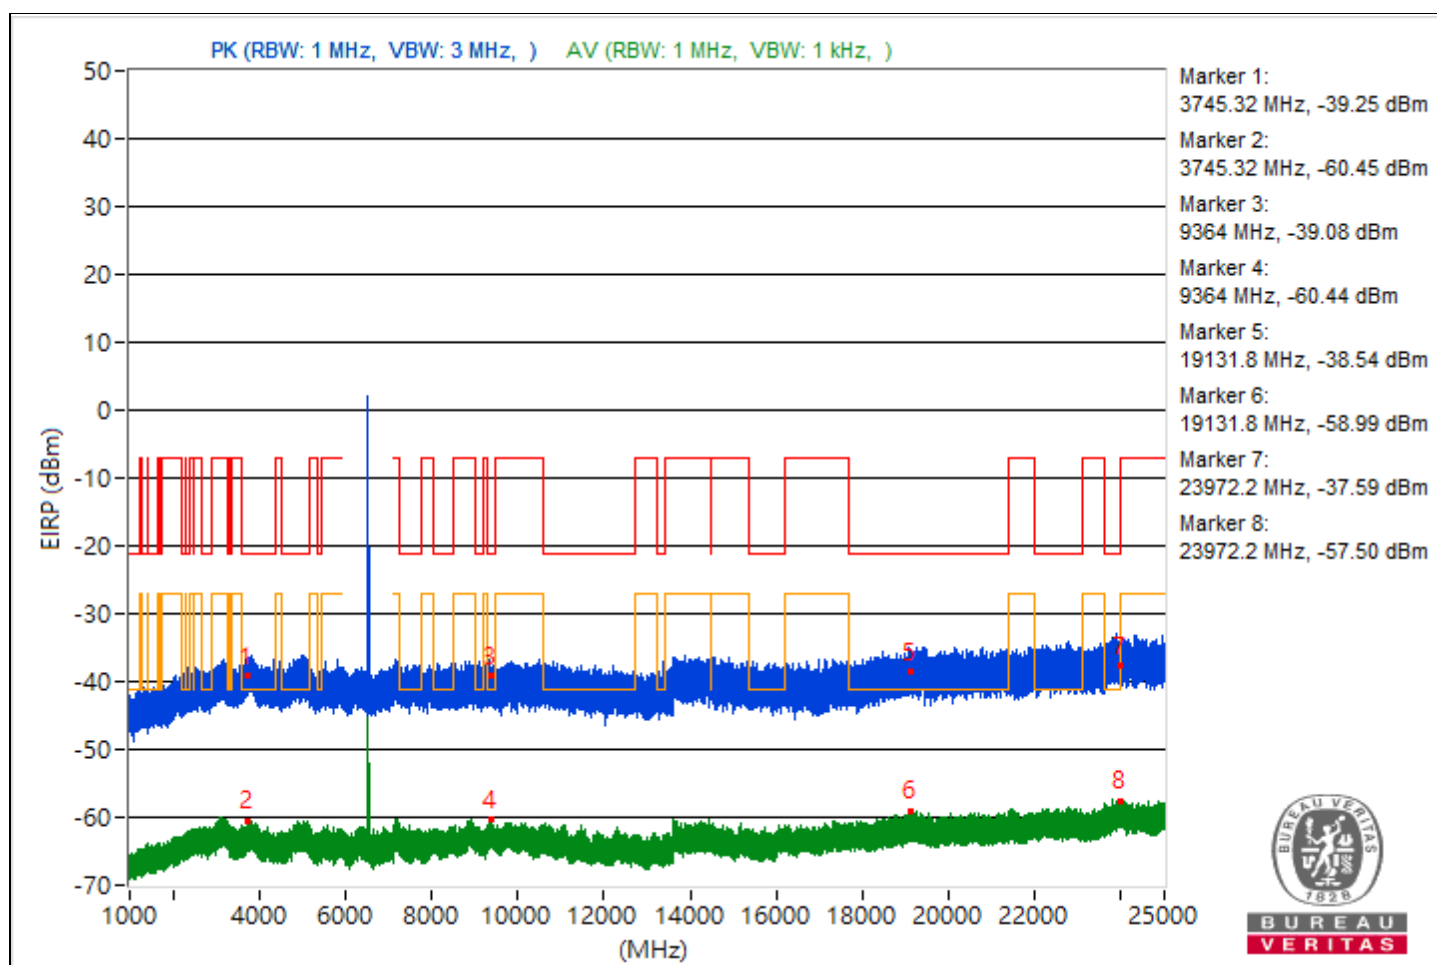


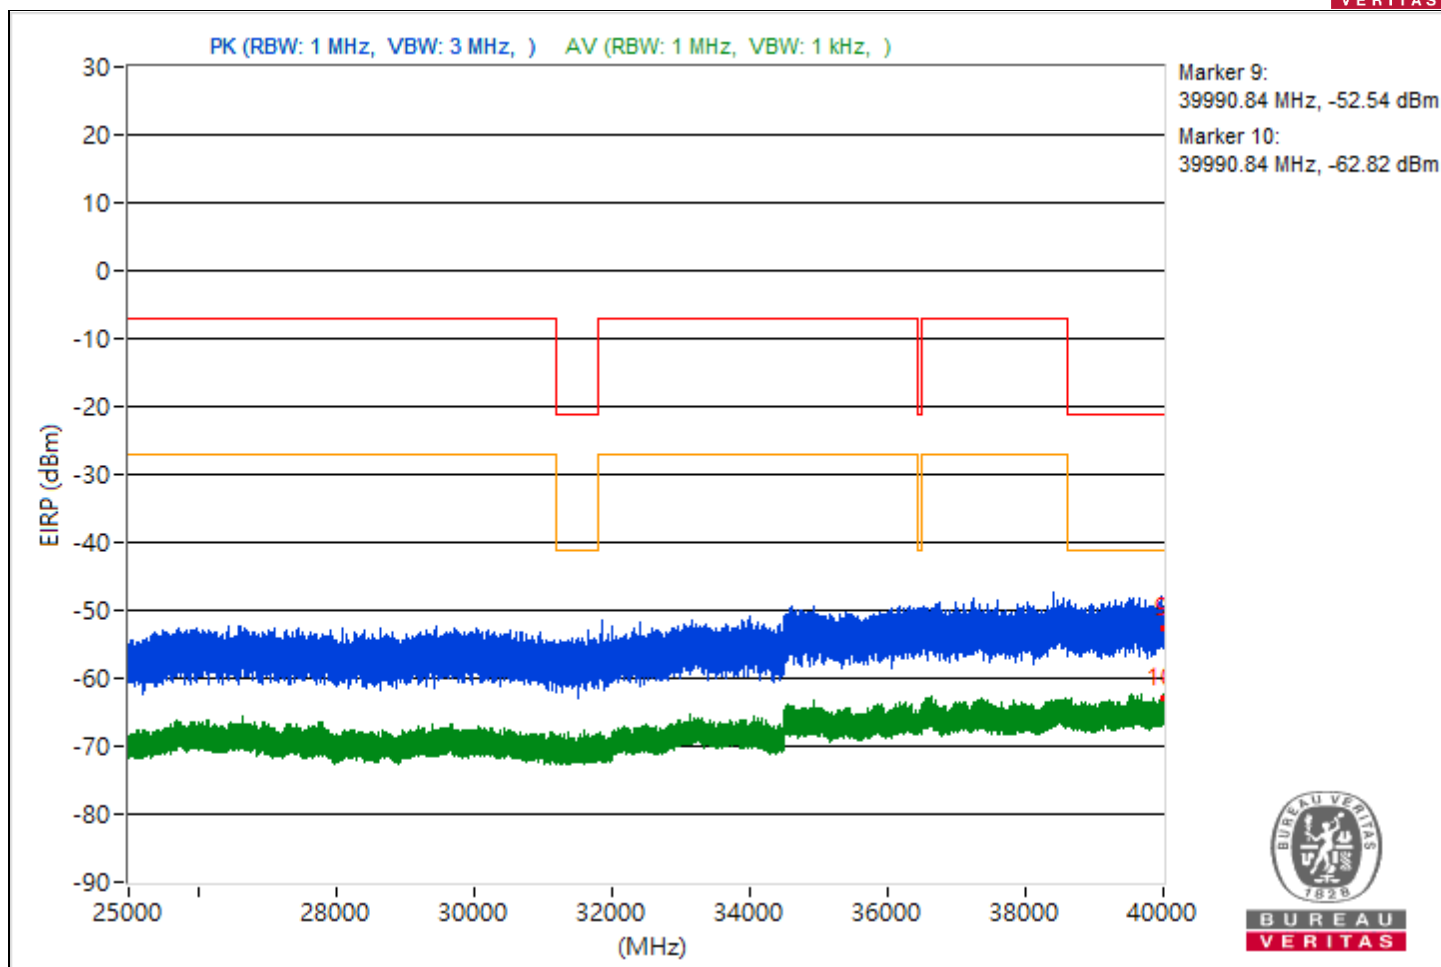


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3832.04	56.08 PK	74	-17.92	-51.01	-49.8	8.17	-39.18
2	3832.04	34.58 AV	54	-19.42	-70.65	-73.55	8.17	-60.68
3	9344.27	53.56 PK	74	-20.44	-53.33	-52.47	8.17	-41.7
4	9344.27	34.57 AV	54	-19.43	-72.8	-71.1	8.17	-60.69
5	20727.9	55.34 PK	74	-18.66	-49.3	-54.23	8.17	-39.92
6	20727.9	36.56 AV	54	-17.44	-69.47	-70.33	8.17	-58.7
7	23973.9	59.72 PK	74	-14.28	-46	-47.58	8.17	-35.54
8	23973.9	37.7 AV	54	-16.3	-70.6	-67.44	8.17	-57.56
9	39652.09	43.15 PK	74	-30.85	-65.02	-62.05	8.17	-52.11
10	39652.09	32 AV	54	-22	-77.53	-72.65	8.17	-63.26

Note: Margin value = Emission Level - Limit value

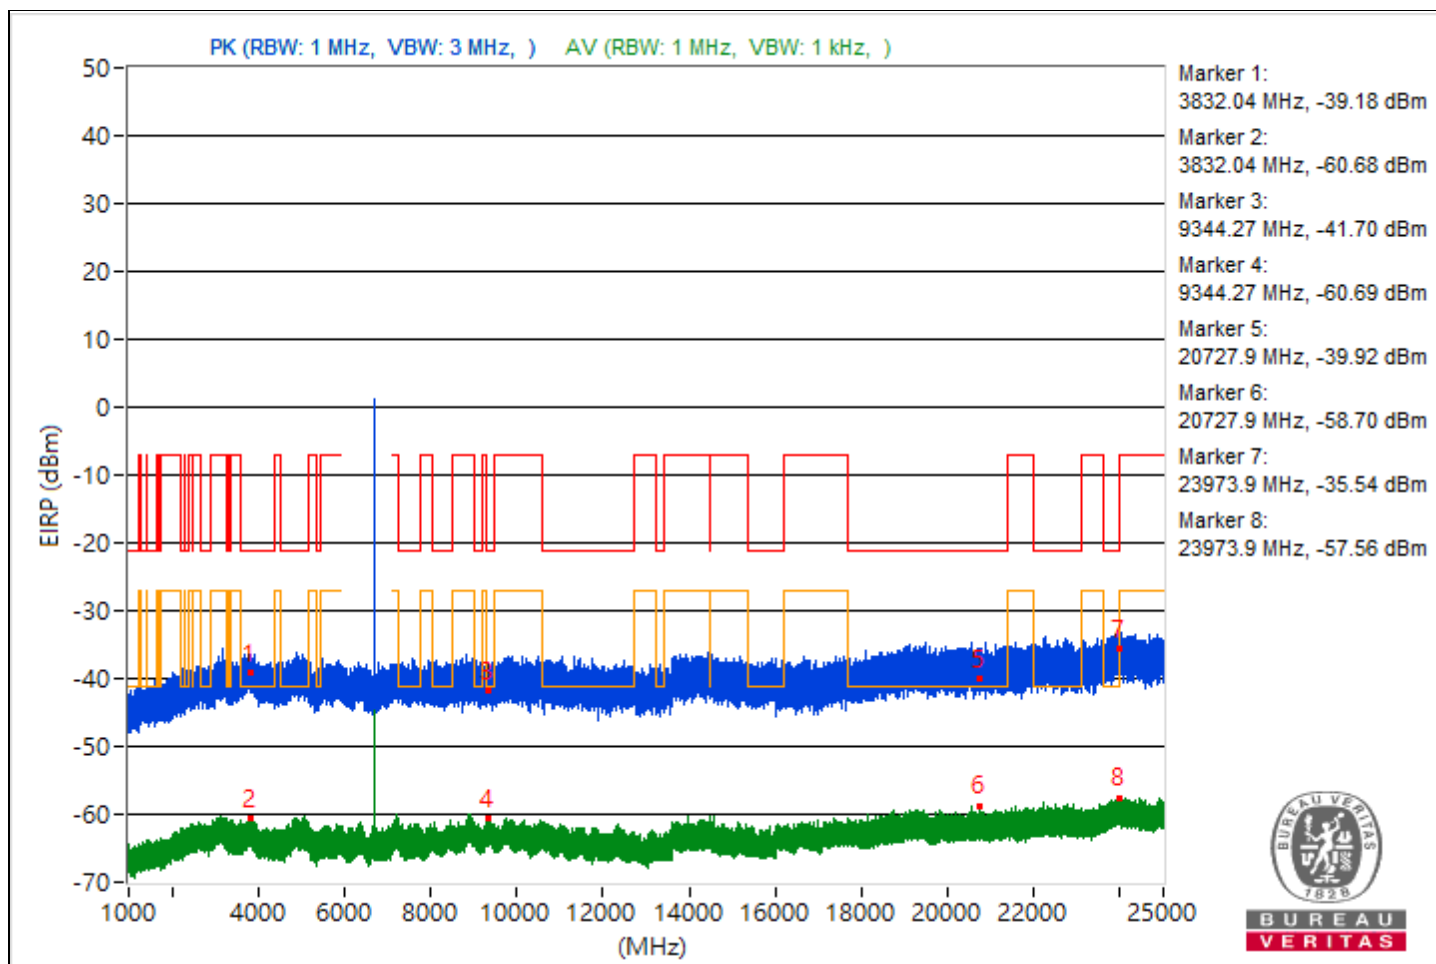


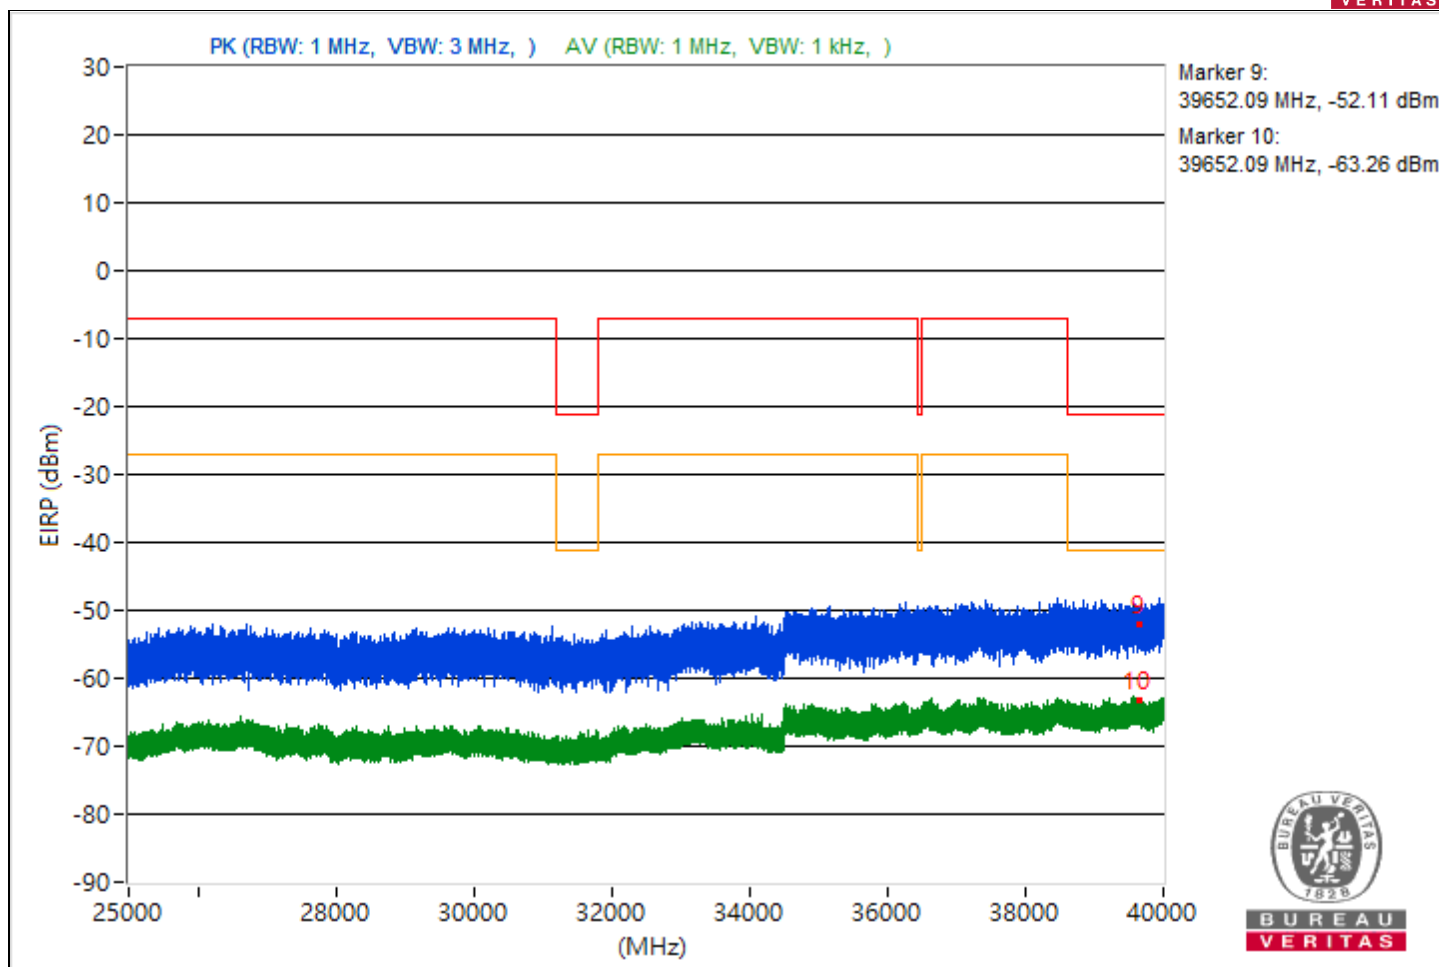


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5037.29	55.39 PK	74	-18.61	-50.81	-51.3	8.17	-39.87
2	5037.29	34.71 AV	54	-19.29	-70.32	-73.84	8.17	-60.55
3	9419.11	54.19 PK	74	-19.81	-54.14	-50.93	8.17	-41.07
4	9419.11	34.49 AV	54	-19.51	-70.96	-73.24	8.17	-60.77
5	19206.9	55.28 PK	74	-18.72	-50.83	-51.51	8.17	-39.98
6	19206.9	35.58 AV	54	-18.42	-69.16	-73.7	8.17	-59.68
7	23995.8	58.37 PK	74	-15.63	-46.33	-51.04	8.17	-36.89
8	23995.8	37.55 AV	54	-16.45	-71.84	-67.15	8.17	-57.71
9	39662.76	42.06 PK	74	-31.94	-62.71	-67.12	8.17	-53.2
10	39662.76	32.41 AV	54	-21.59	-72.63	-76.12	8.17	-62.85

Note: Margin value = Emission Level - Limit value

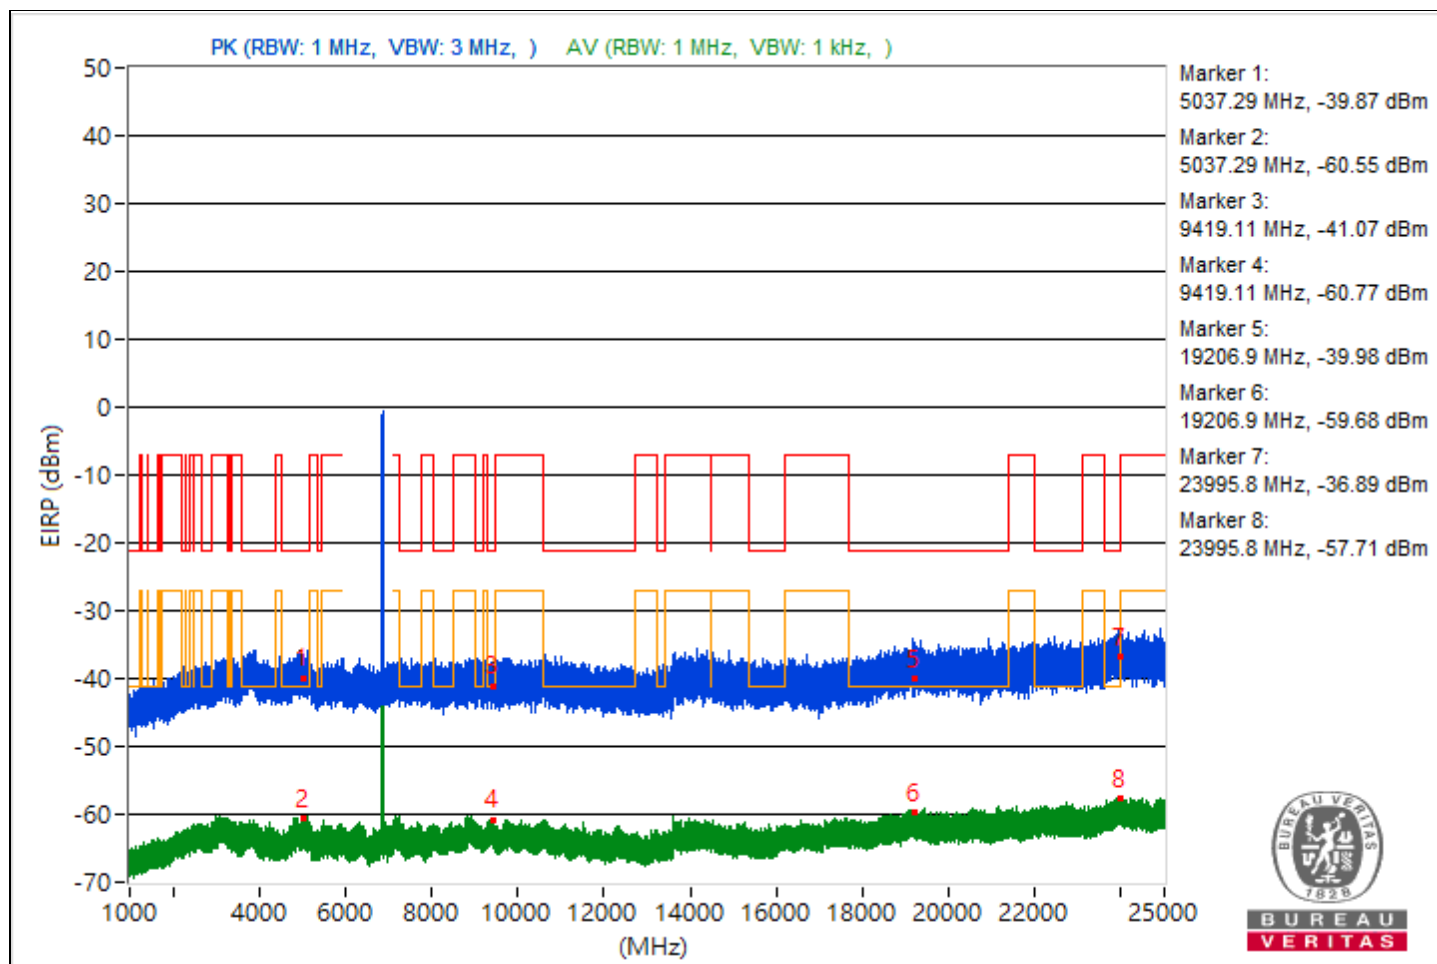


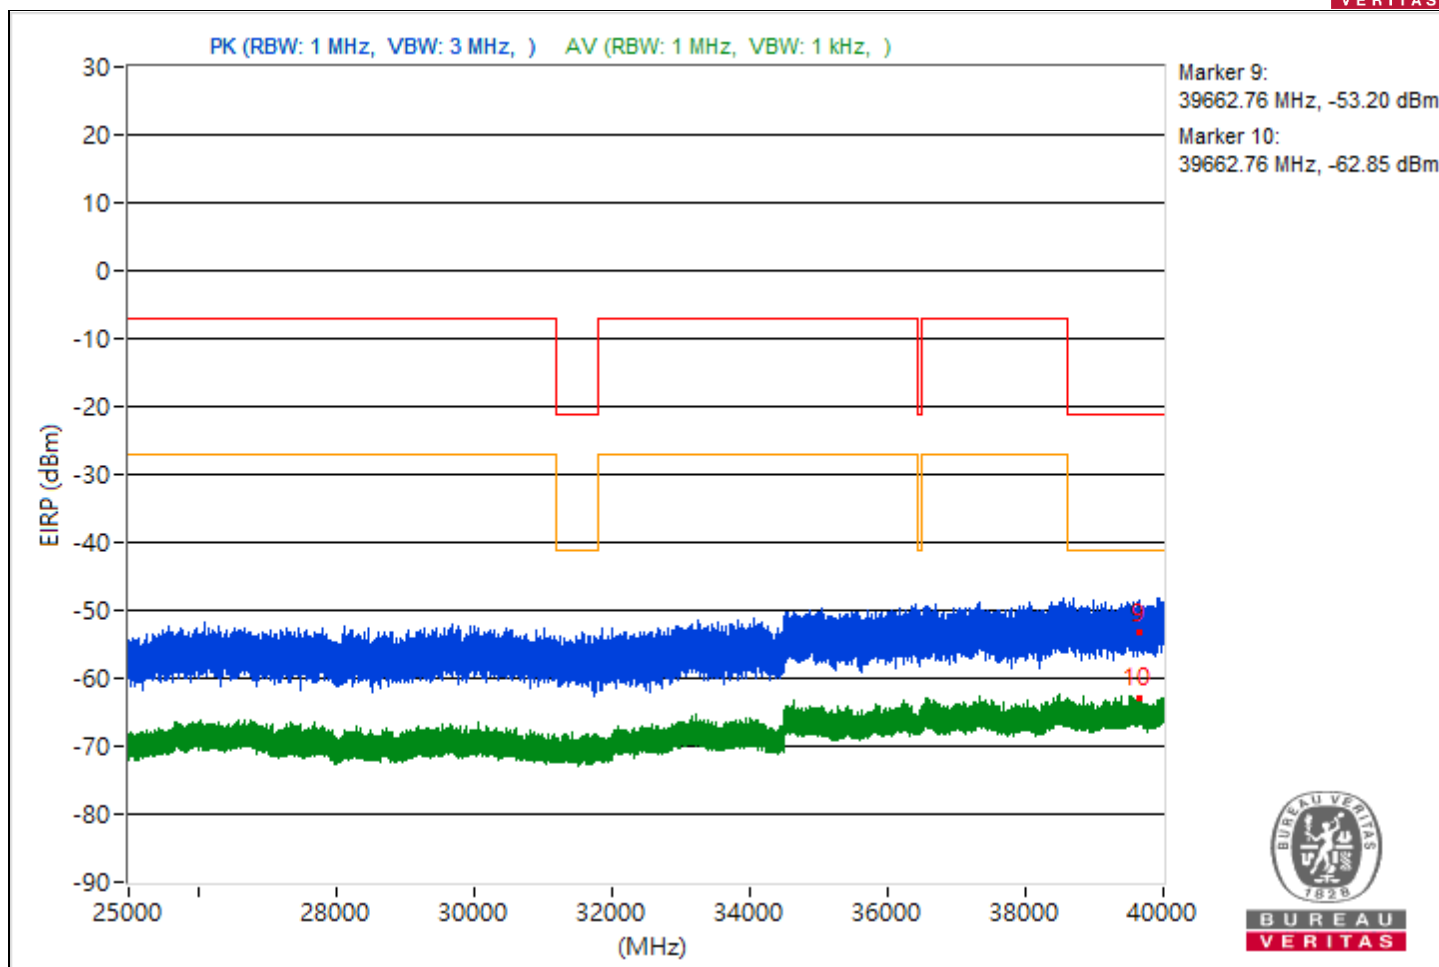


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4906	55.42 PK	74	-18.58	-51.24	-50.81	8.17	-39.84
2	4906	34.94 AV	54	-19.06	-70.2	-73.36	8.17	-60.32
3	11870.13	56.43 PK	74	-17.57	-53.84	-48	8.17	-38.83
4	11870.13	35.28 AV	54	-18.72	-75.08	-69.13	8.17	-59.98
5	20198.7	57.54 PK	74	-16.46	-48.47	-49.38	8.17	-37.72
6	20198.7	35.68 AV	54	-18.32	-73.65	-69.04	8.17	-59.58
7	23955.5	58.7 PK	74	-15.3	-49.59	-46.45	8.17	-36.56
8	23955.5	37.42 AV	54	-16.58	-71.68	-67.38	8.17	-57.84
9	39973.42	42.48 PK	74	-31.52	-63.37	-64.64	8.17	-52.78
10	39973.42	32.8 AV	54	-21.2	-72.35	-75.49	8.17	-62.46

Note: Margin value = Emission Level - Limit value

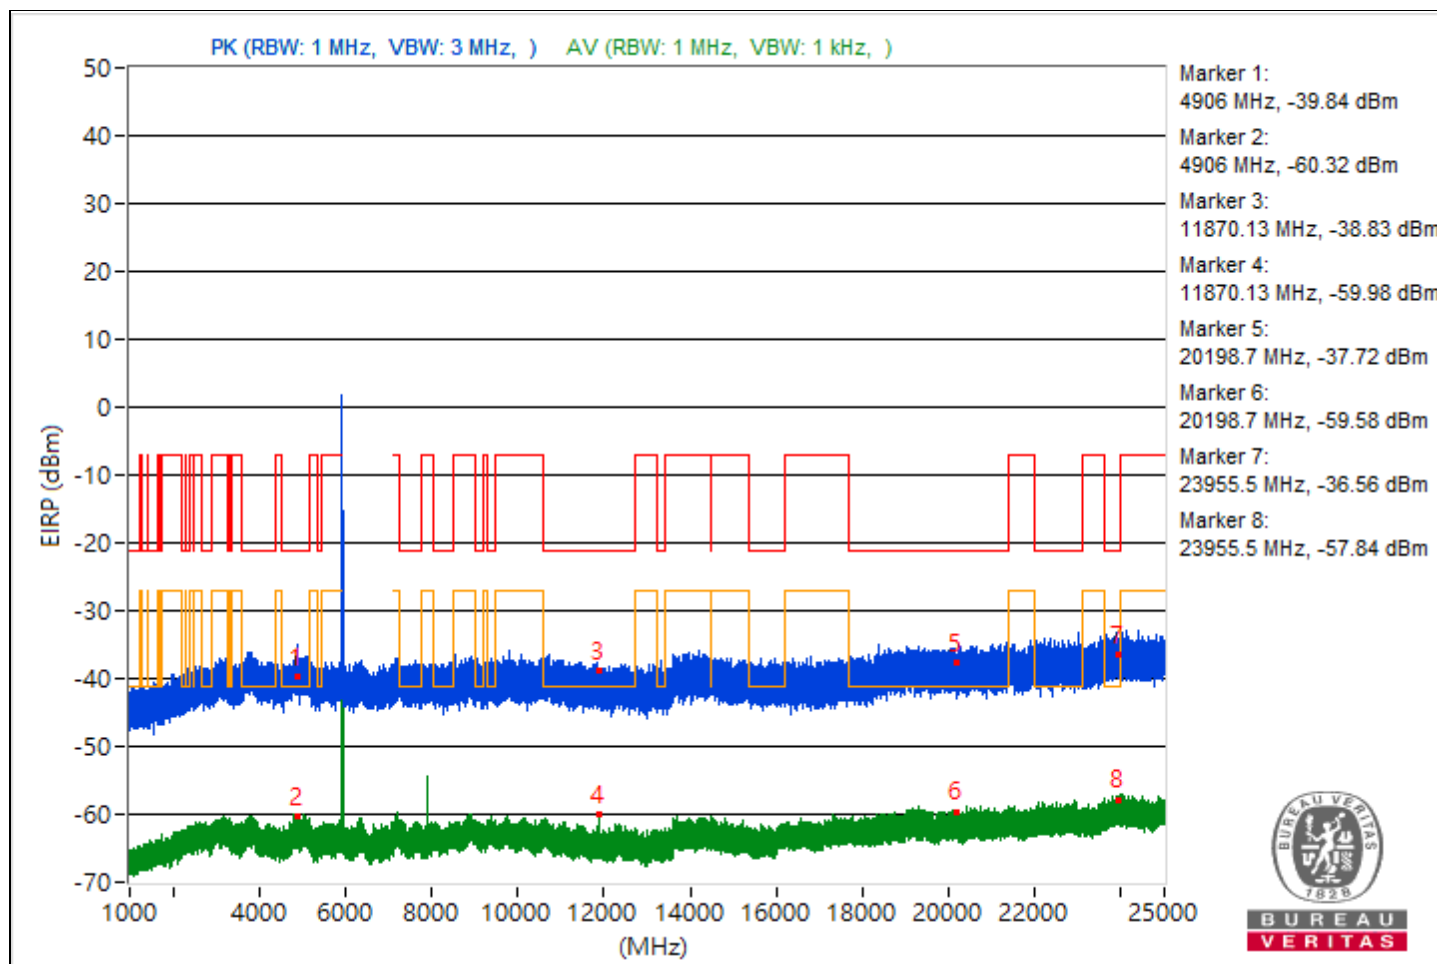


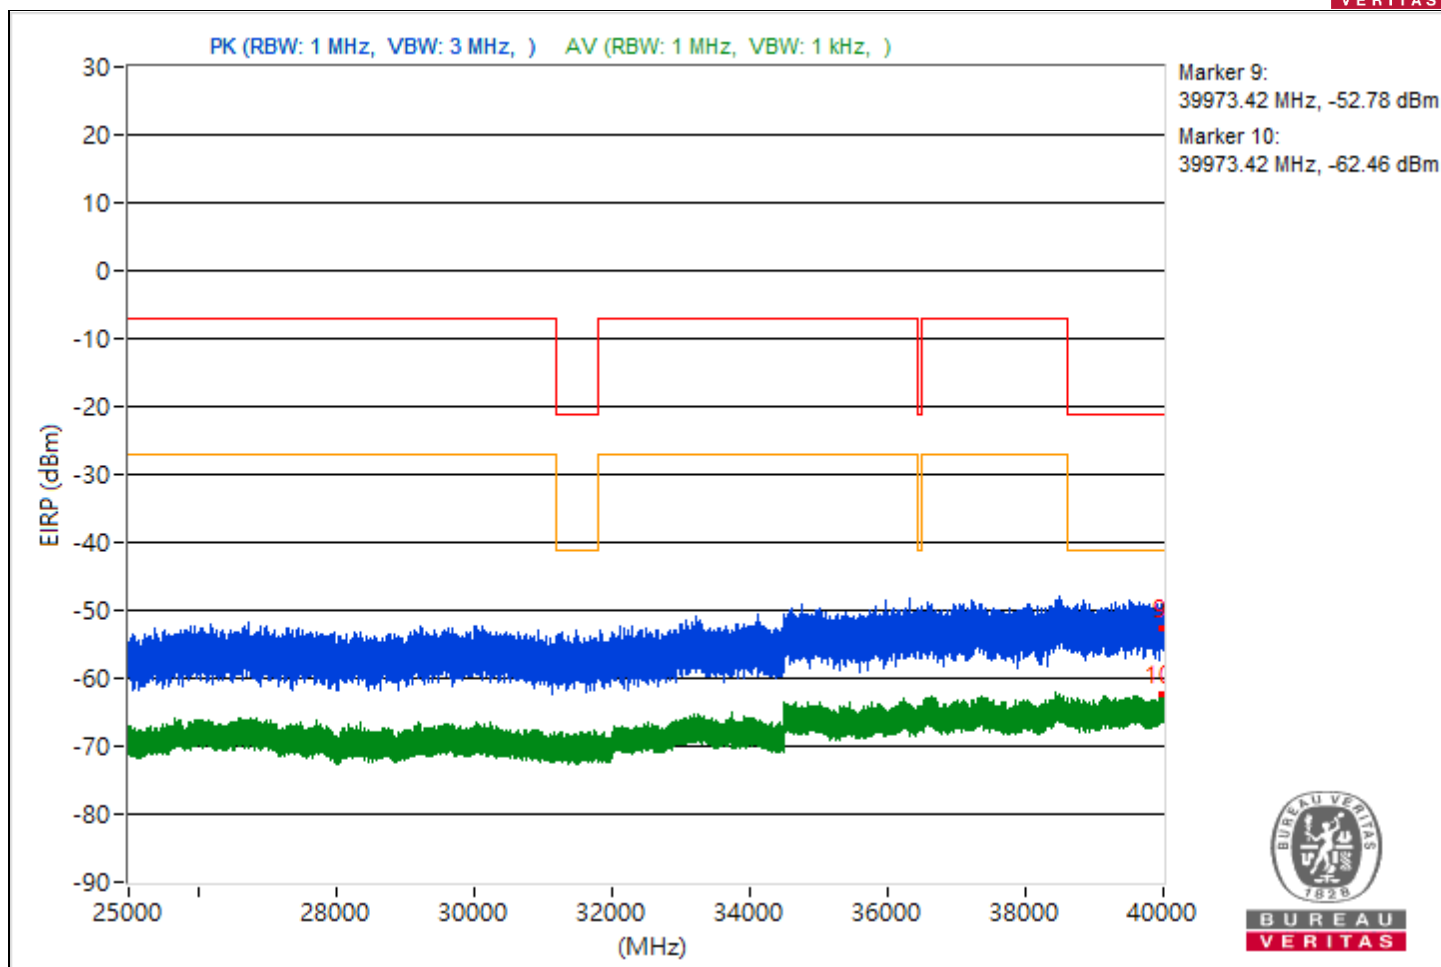


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5083.64	54.92 PK	74	-19.08	-51.44	-51.61	8.17	-40.34
2	5083.64	35.38 AV	54	-18.62	-72.53	-69.97	8.17	-59.88
3	11910.13	54.16 PK	74	-19.84	-51.54	-53.17	8.17	-41.1
4	11910.13	34.91 AV	54	-19.09	-75.85	-69.41	8.17	-60.35
5	21389.7	56.98 PK	74	-17.02	-49.56	-49.36	8.17	-38.28
6	21389.7	36.28 AV	54	-17.72	-73.5	-68.3	8.17	-58.98
7	23966.7	58.97 PK	74	-15.03	-48.08	-46.93	8.17	-36.29
8	23966.7	37.33 AV	54	-16.67	-71.21	-67.7	8.17	-57.93
9	39656.53	42.97 PK	74	-31.03	-64.34	-62.75	8.17	-52.29
10	39656.53	32.63 AV	54	-21.37	-74.97	-72.9	8.17	-62.63

Note: Margin value = Emission Level - Limit value

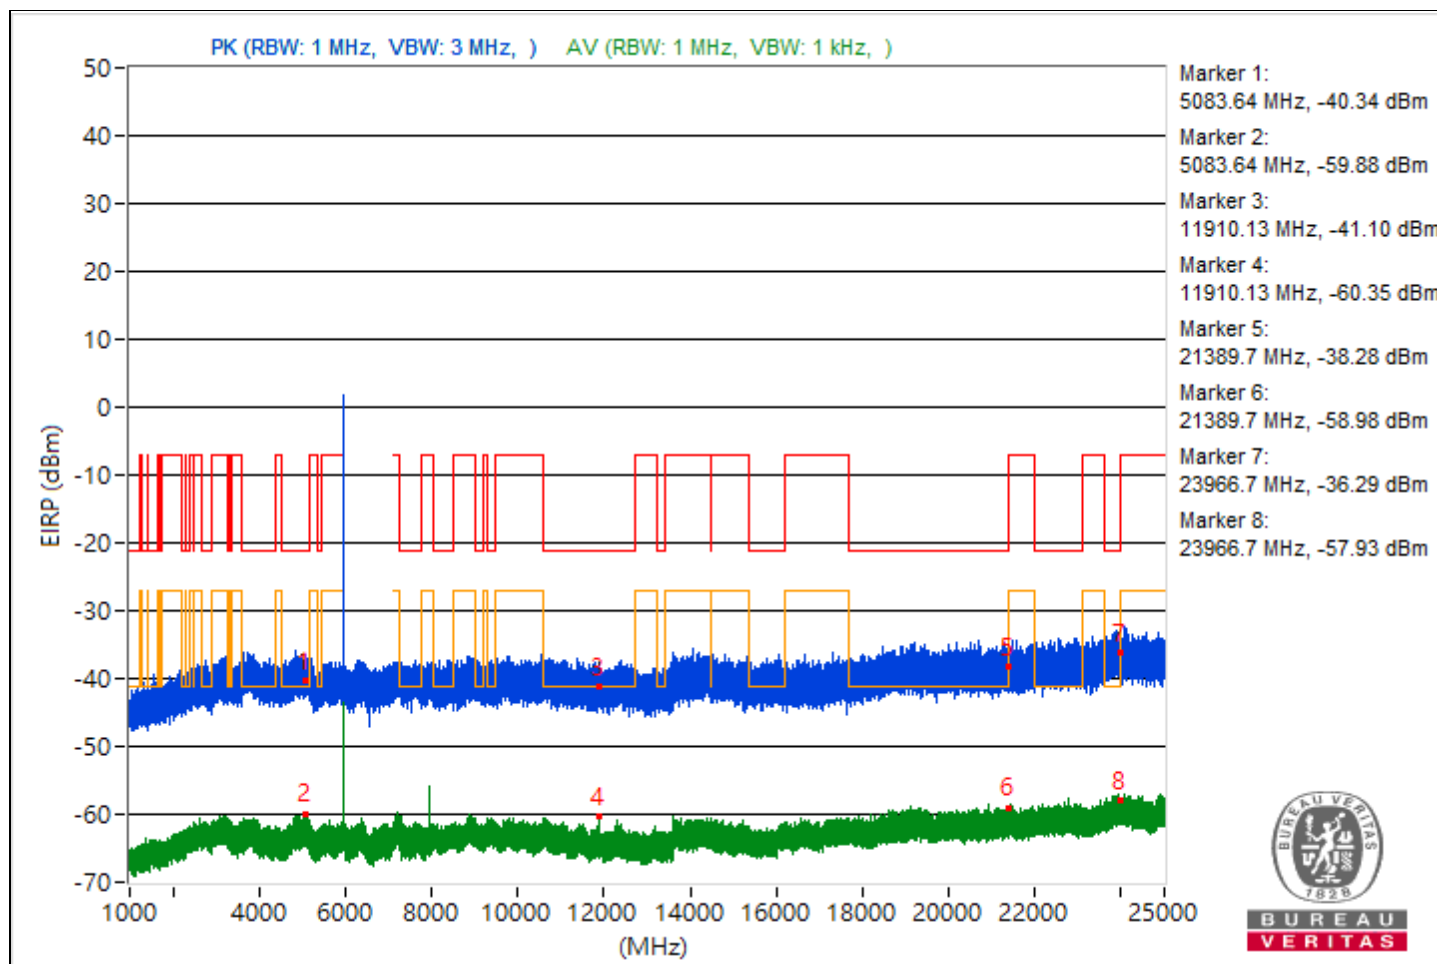


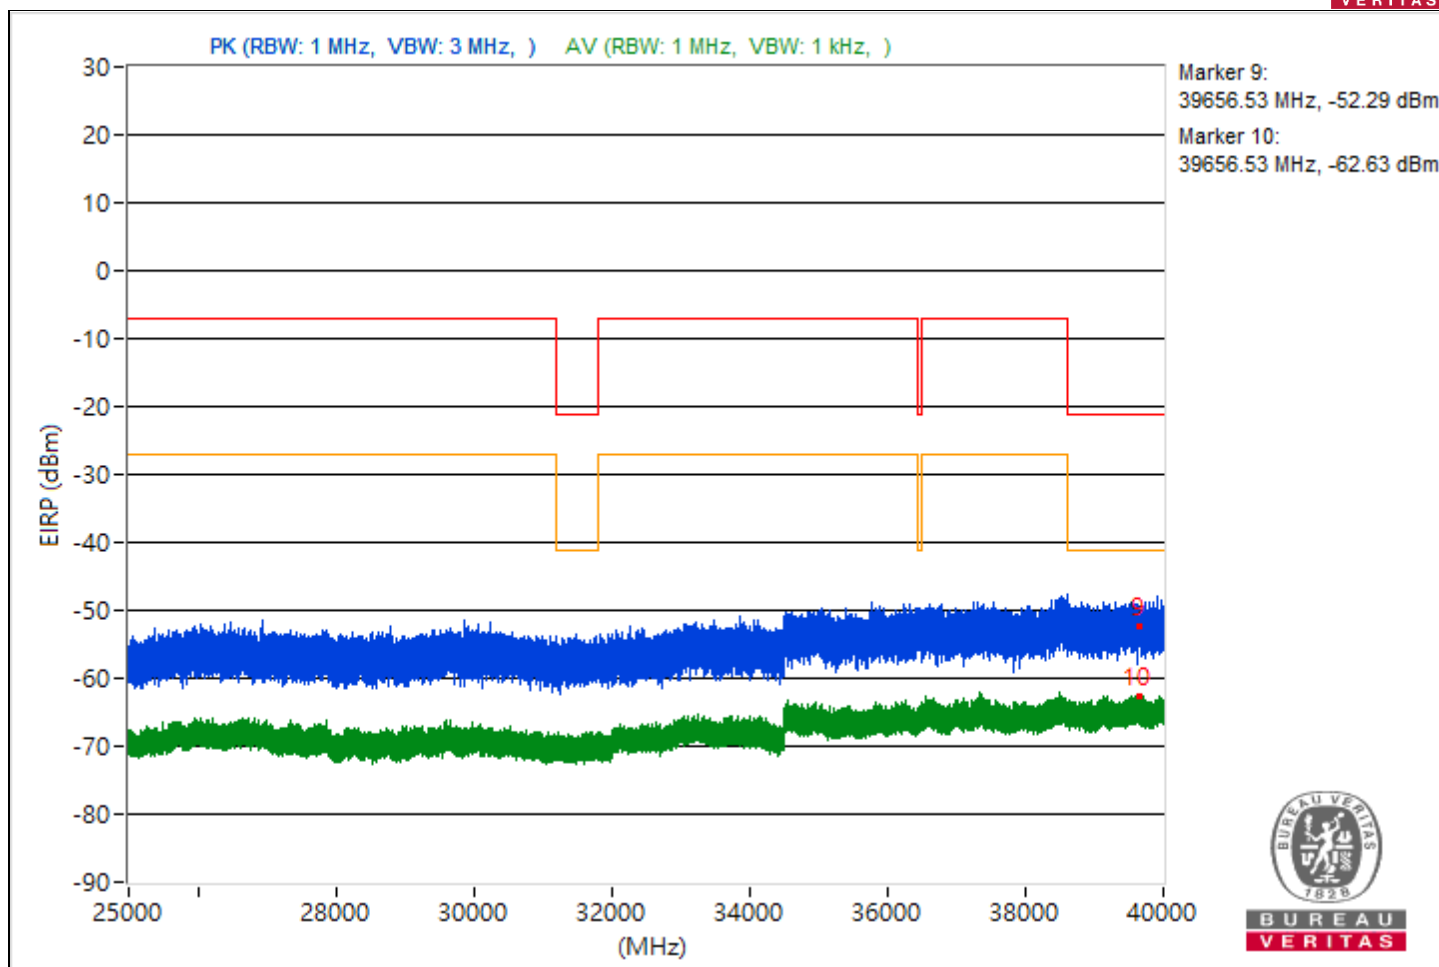


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4895.89	57.38 PK	74	-16.62	-49.26	-48.87	8.17	-37.88
2	4895.89	34.9 AV	54	-19.1	-69.71	-74.76	8.17	-60.36
3	9093.78	53.59 PK	74	-20.41	-52.7	-53.01	8.17	-41.67
4	9093.78	35.1 AV	54	-18.9	-72.41	-70.48	8.17	-60.16
5	19312.3	57.17 PK	74	-16.83	-49.22	-49.32	8.17	-38.09
6	19312.3	36.62 AV	54	-17.38	-68.37	-72.02	8.17	-58.64
7	23953.1	58.97 PK	74	-15.03	-47.55	-47.4	8.17	-36.29
8	23953.1	37.76 AV	54	-16.24	-70.78	-67.27	8.17	-57.5
9	39559.91	42.15 PK	74	-31.85	-64.3	-64.27	8.17	-53.11
10	39559.91	32.46 AV	54	-21.54	-72.22	-76.98	8.17	-62.8

Note: Margin value = Emission Level - Limit value

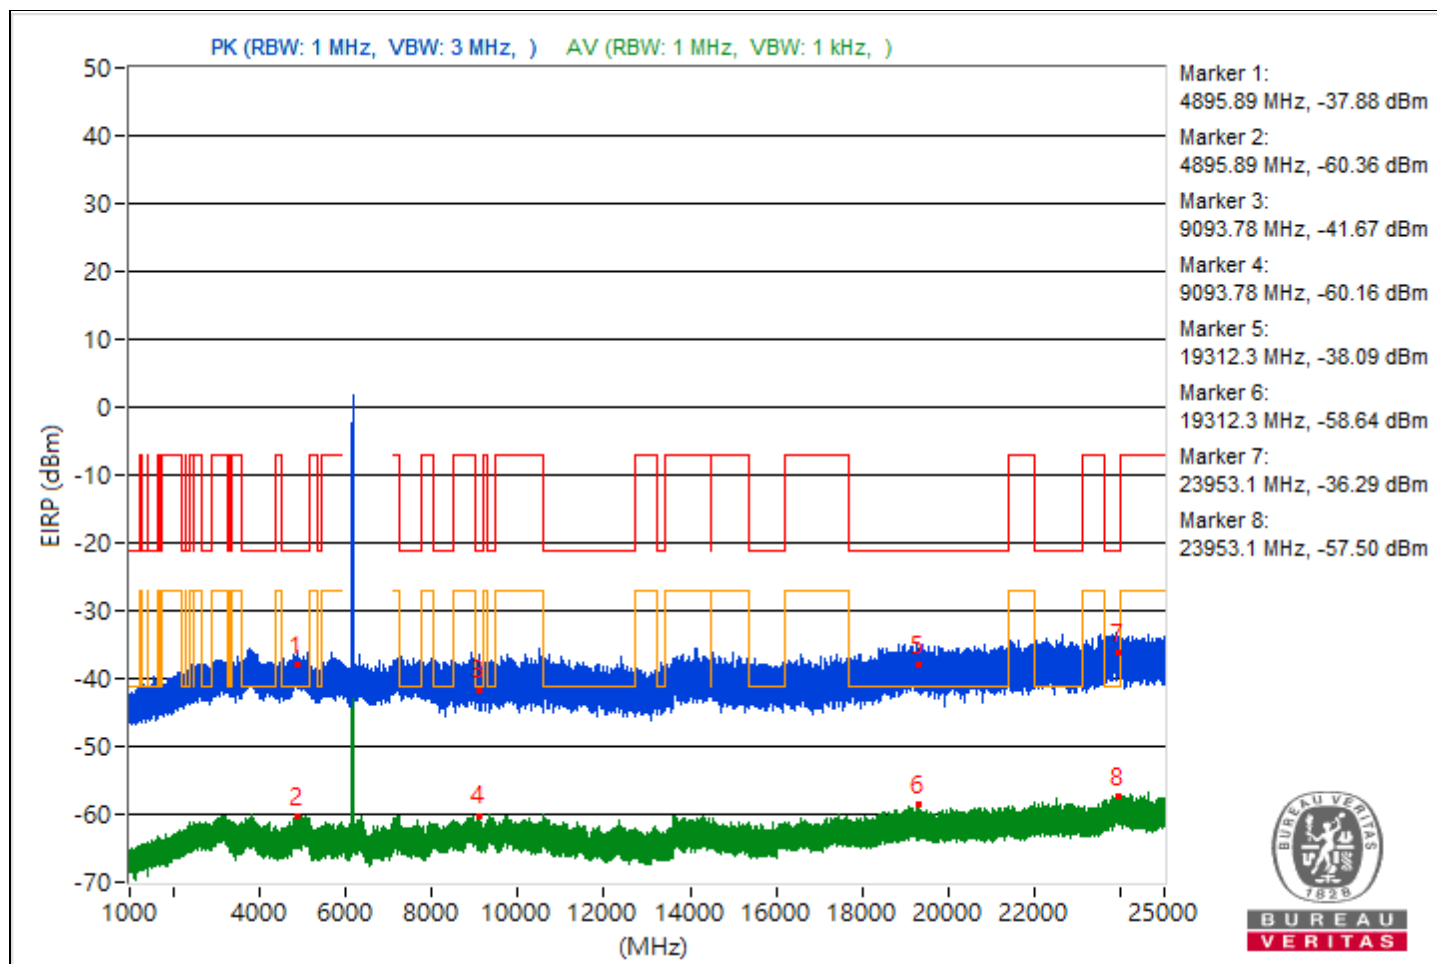


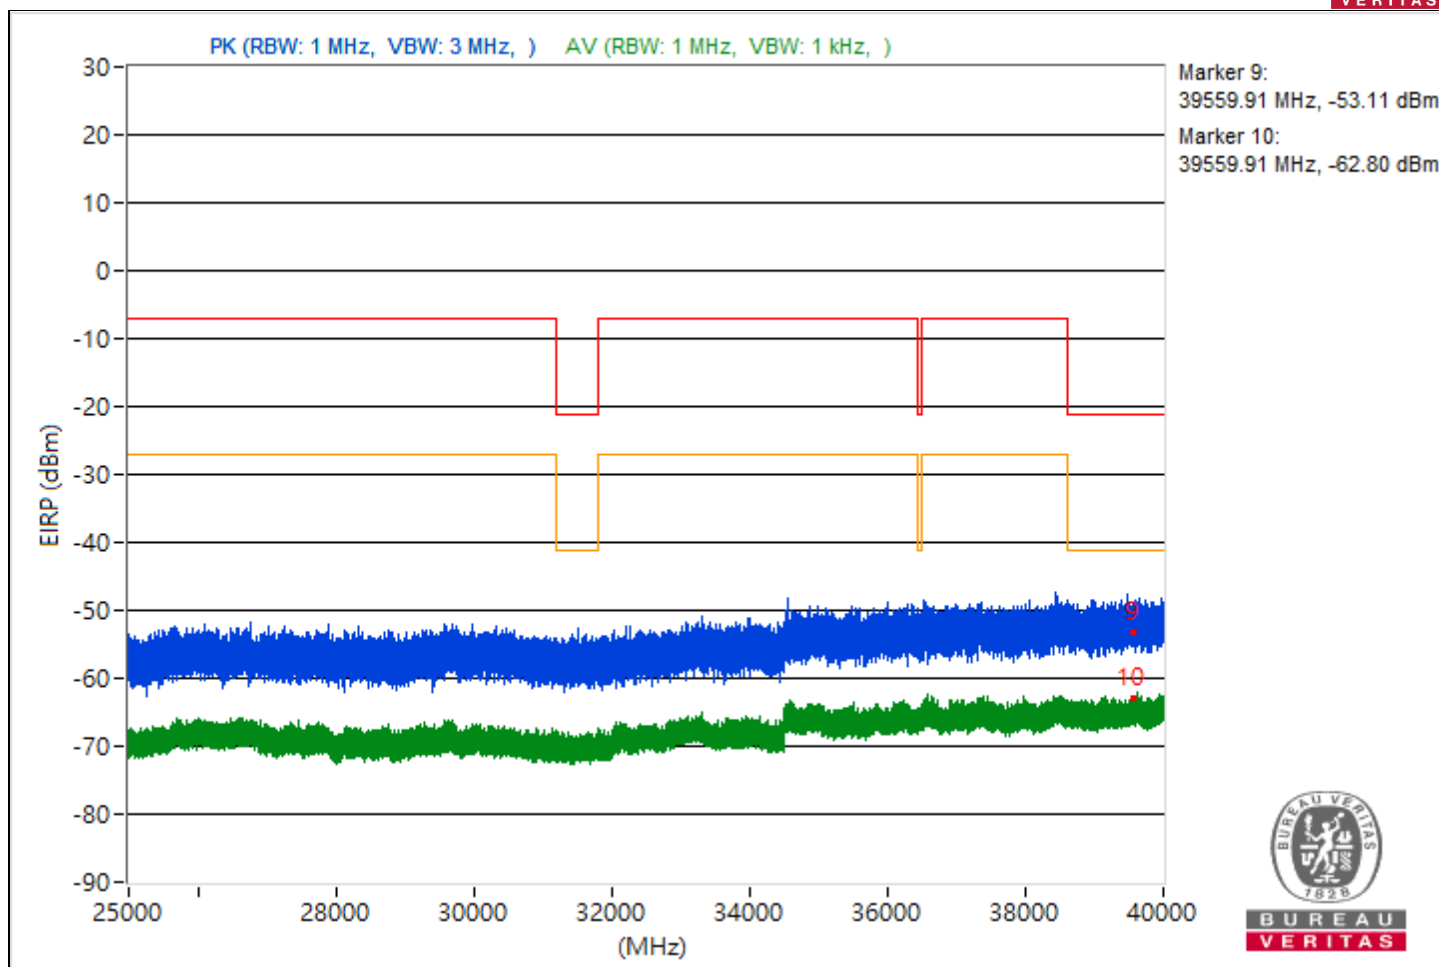


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5012.24	55.14 PK	74	-18.86	-51.66	-50.96	8.17	-40.12
2	5012.24	35.09 AV	54	-18.91	-73.39	-69.96	8.17	-60.17
3	10626.93	55.08 PK	74	-18.92	-52.37	-50.54	8.17	-40.18
4	10626.93	34.86 AV	54	-19.14	-69.92	-74.29	8.17	-60.4
5	20607.8	57.2 PK	74	-16.8	-49.66	-48.86	8.17	-38.06
6	20607.8	36.45 AV	54	-17.55	-71.15	-69.07	8.17	-58.81
7	23968.5	59.18 PK	74	-14.82	-49.65	-45.72	8.17	-36.08
8	23968.5	37.86 AV	54	-16.14	-70.14	-67.44	8.17	-57.4
9	39991.11	44.9 PK	74	-29.1	-64.43	-59.83	8.17	-50.36
10	39991.11	32.22 AV	54	-21.78	-76.39	-72.78	8.17	-63.04

Note: Margin value = Emission Level - Limit value

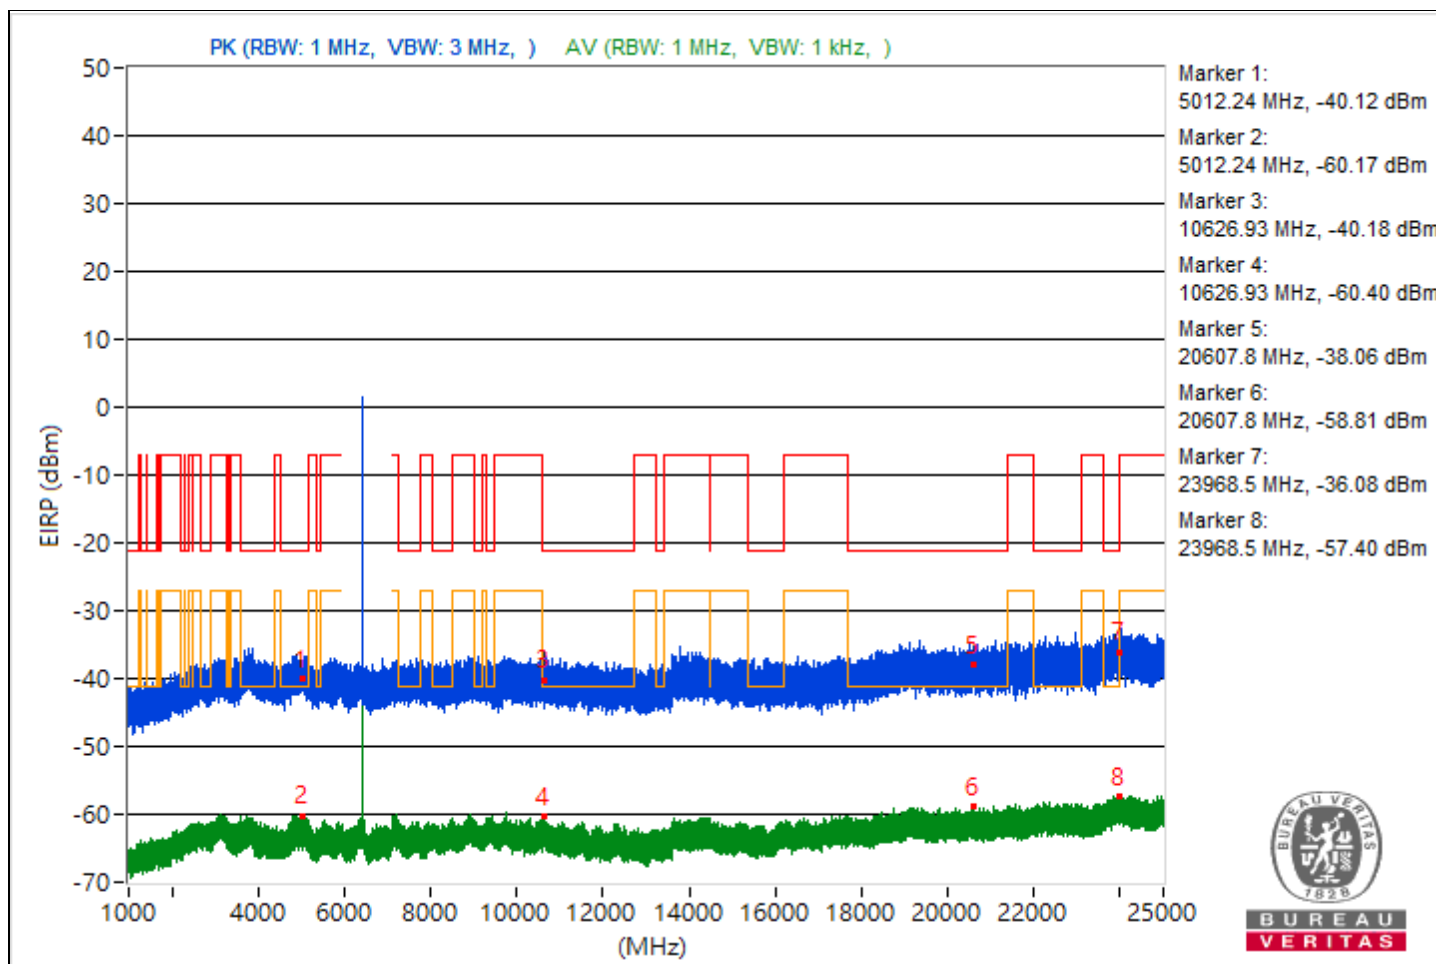


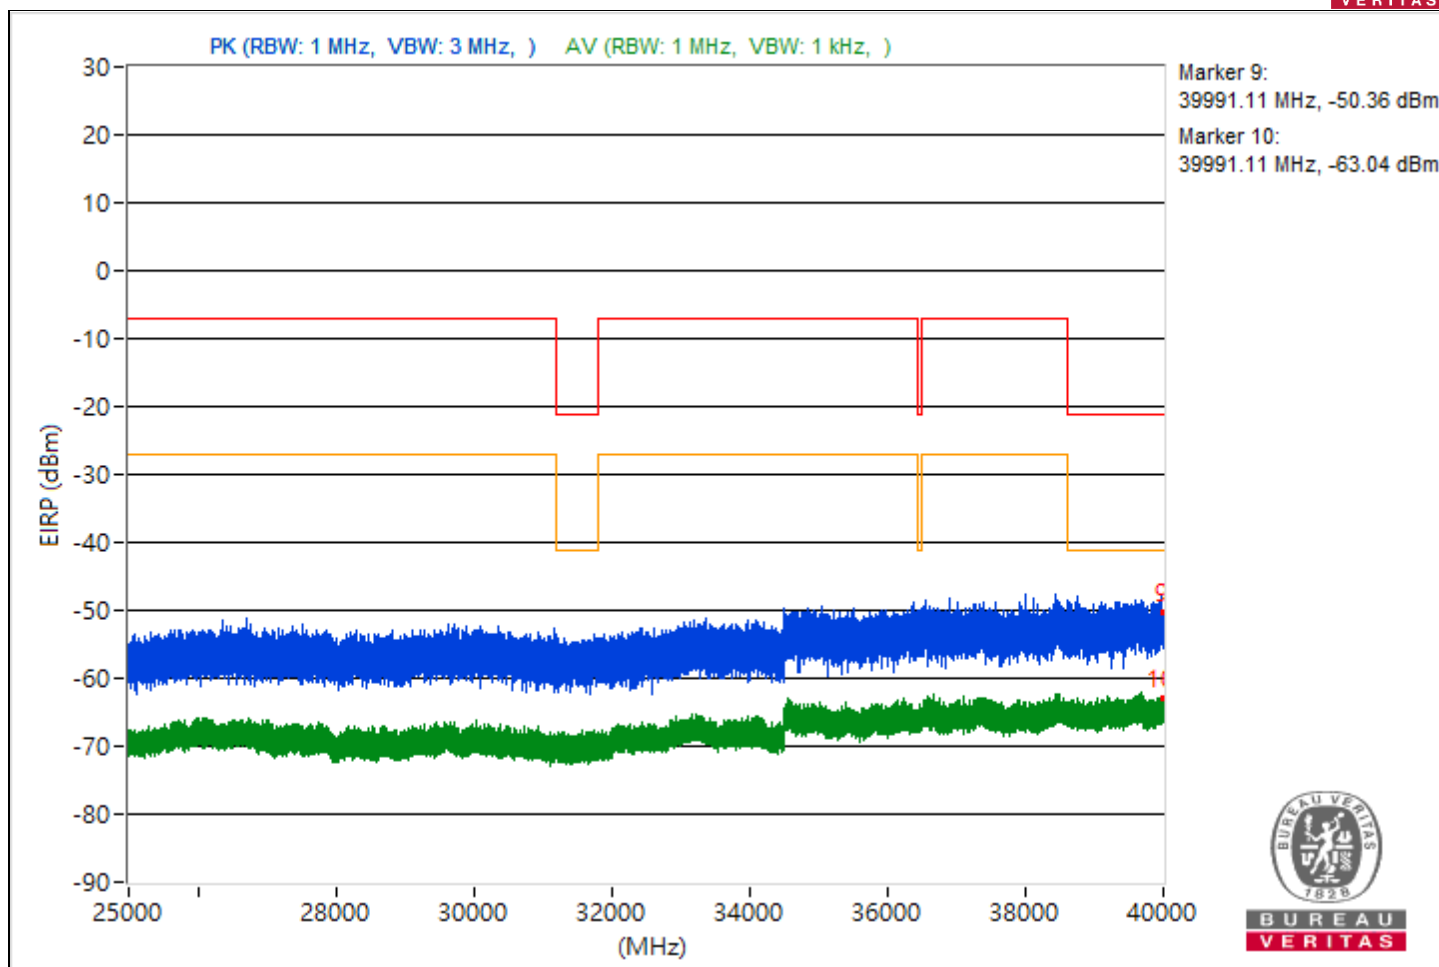


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5034.1	55.8 PK	74	-18.2	-52.21	-49.48	8.17	-39.46
2	5034.1	35.25 AV	54	-18.75	-69.37	-74.38	8.17	-60.01
3	9401.96	55.12 PK	74	-18.88	-52.59	-50.35	8.17	-40.14
4	9401.96	34.28 AV	54	-19.72	-74.29	-70.74	8.17	-60.98
5	19792.2	56.03 PK	74	-17.97	-50.01	-50.85	8.17	-39.23
6	19792.2	36.64 AV	54	-17.36	-70.63	-69.11	8.17	-58.62
7	23934.8	56.78 PK	74	-17.22	-48.55	-51.17	8.17	-38.48
8	23934.8	37.98 AV	54	-16.02	-71.15	-66.81	8.17	-57.28
9	39618.76	44.69 PK	74	-29.31	-61.28	-62.27	8.17	-50.57
10	39618.76	32.66 AV	54	-21.34	-75.27	-72.67	8.17	-62.6

Note: Margin value = Emission Level - Limit value

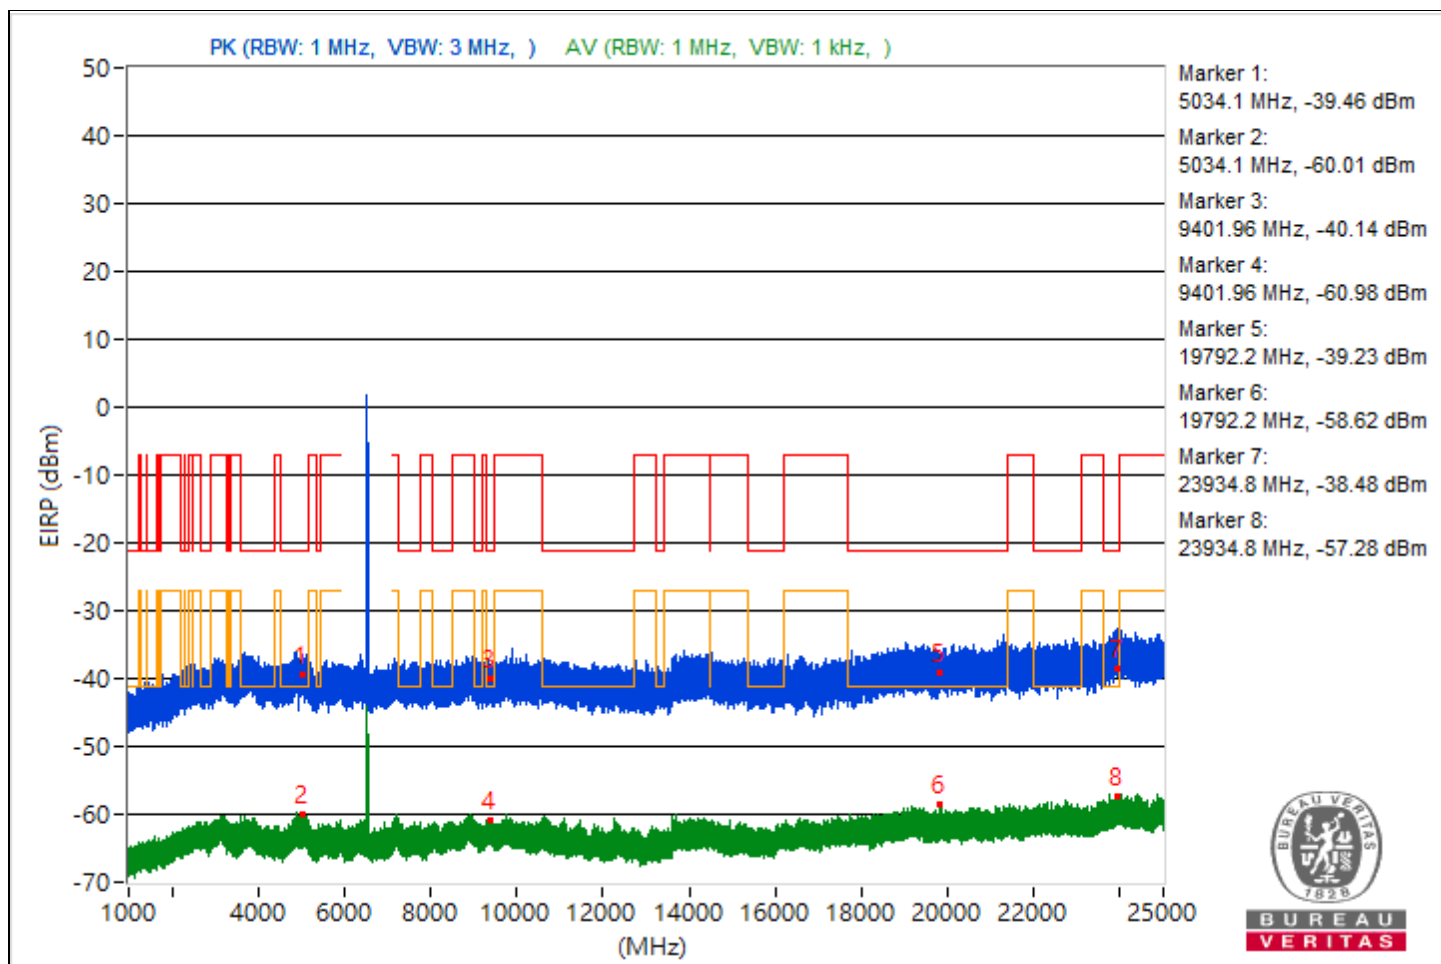


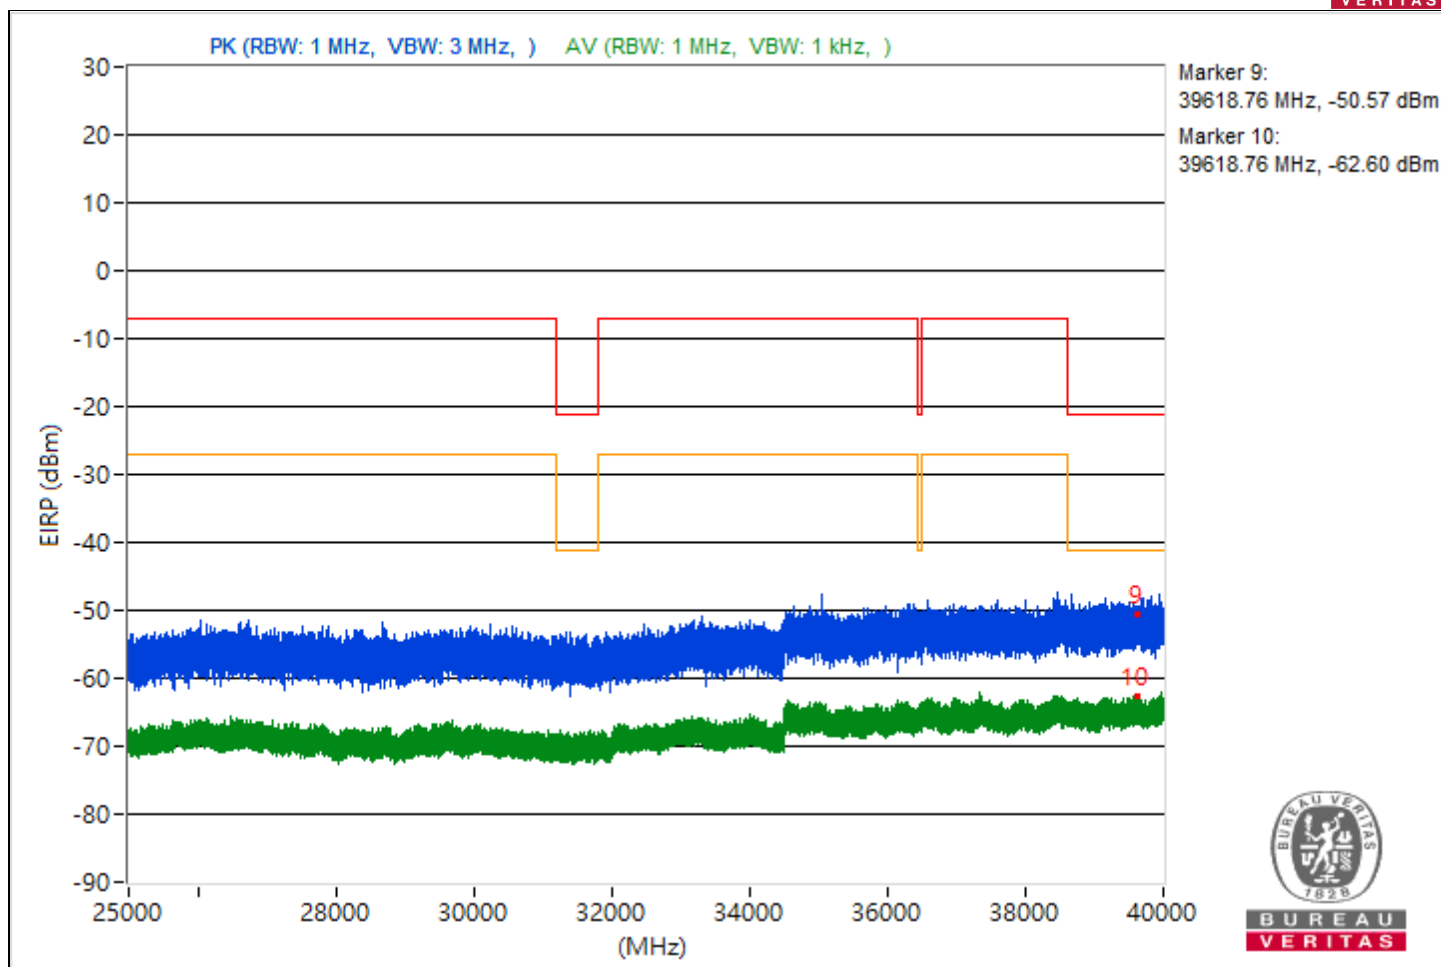


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4907.63	54.86 PK	74	-19.14	-51.12	-52.1	8.17	-40.4
2	4907.63	34.87 AV	54	-19.13	-70.4	-73.19	8.17	-60.39
3	8440.98	54.61 PK	74	-19.39	-51.46	-52.25	8.17	-40.65
4	8440.98	34.33 AV	54	-19.67	-73.82	-70.89	8.17	-60.93
5	19216.4	55.5 PK	74	-18.5	-53.61	-49.3	8.17	-39.76
6	19216.4	36.21 AV	54	-17.79	-72.66	-68.68	8.17	-59.05
7	23894.3	59.83 PK	74	-14.17	-45.8	-47.62	8.17	-35.43
8	23894.3	37.49 AV	54	-16.51	-67.41	-71.36	8.17	-57.77
9	39814.22	44.23 PK	74	-29.77	-60.92	-64.08	8.17	-51.03
10	39814.22	32.46 AV	54	-21.54	-75.39	-72.91	8.17	-62.8

Note: Margin value = Emission Level - Limit value

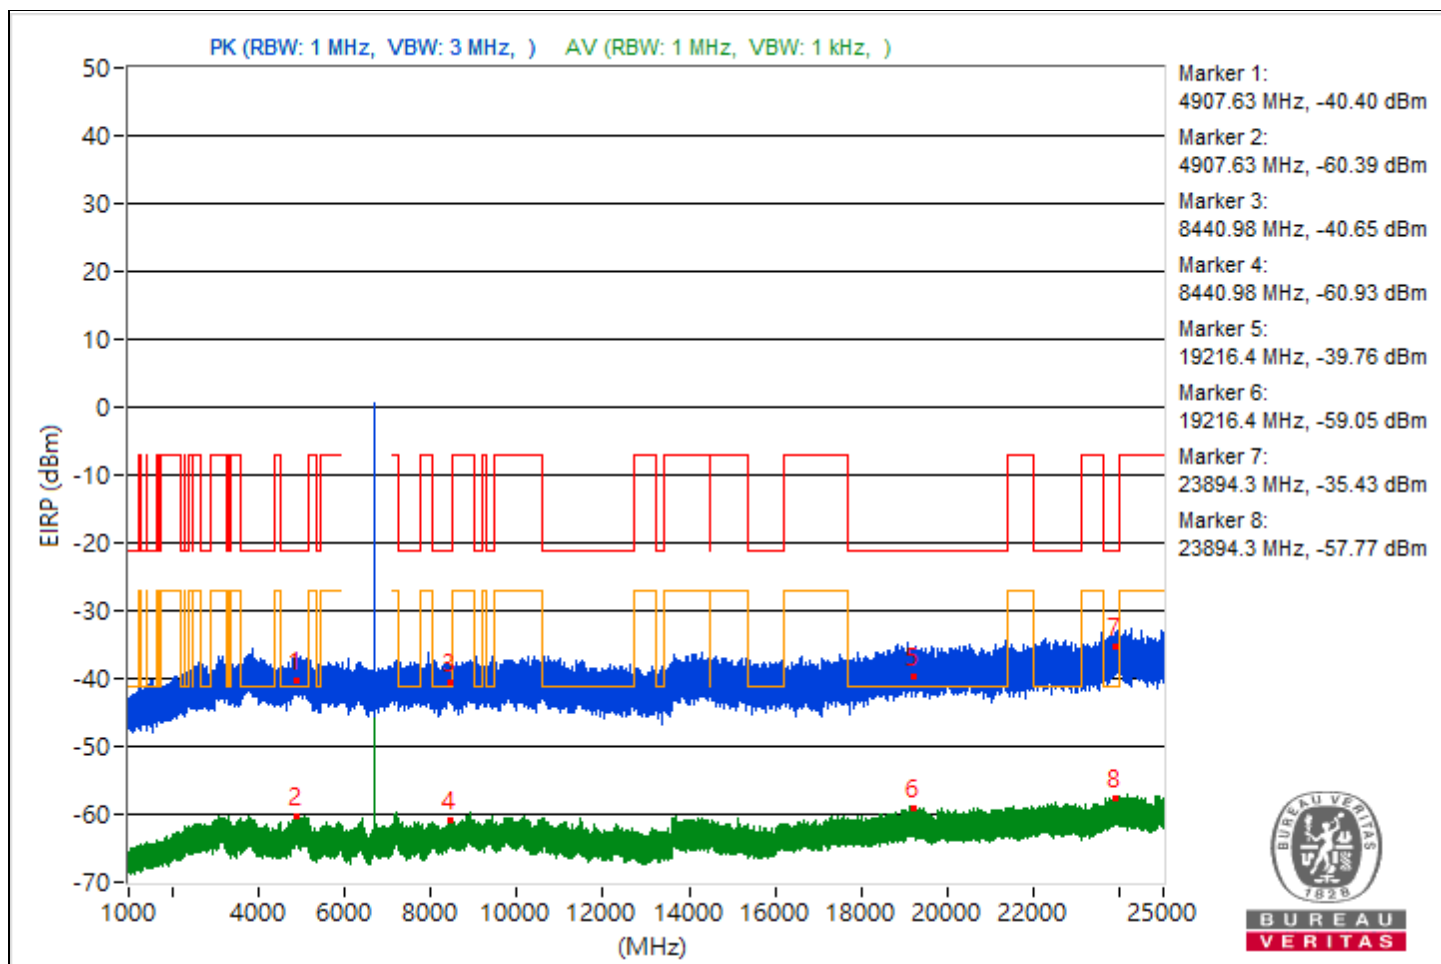


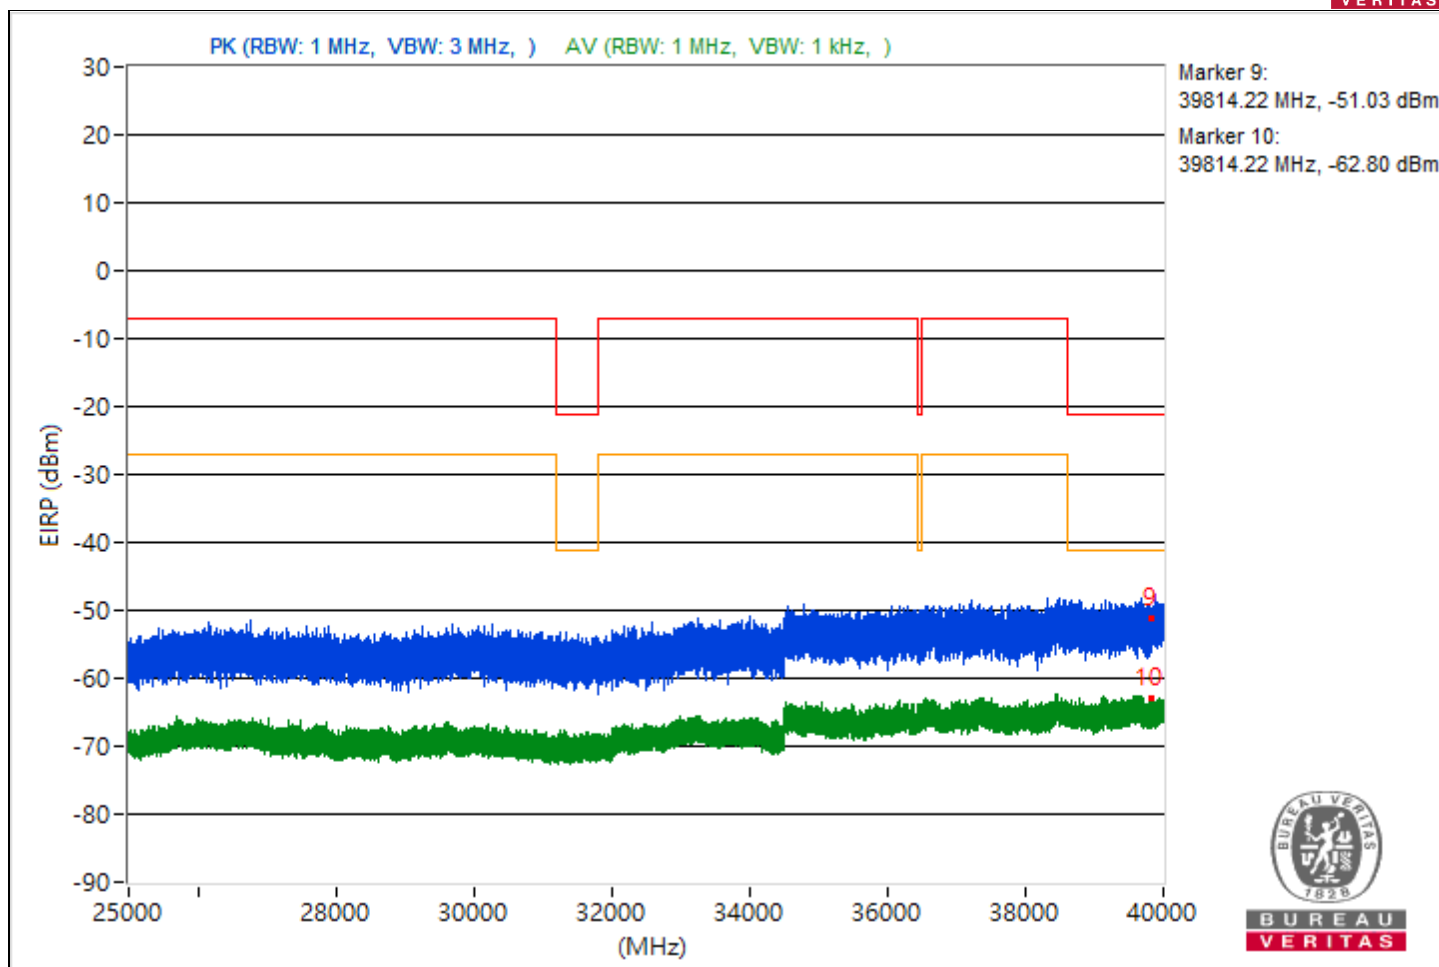


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4903.9	55.5 PK	74	-18.5	-51.87	-50.17	8.17	-39.76
2	4903.9	34.88 AV	54	-19.12	-70.25	-73.44	8.17	-60.38
3	10636.71	55.43 PK	74	-18.57	-50.12	-52.13	8.17	-39.83
4	10636.71	34.69 AV	54	-19.31	-73.26	-70.63	8.17	-60.57
5	19167.4	54.91 PK	74	-19.09	-50.82	-52.39	8.17	-40.35
6	19167.4	36.69 AV	54	-17.31	-71.86	-68.33	8.17	-58.57
7	23924.1	58.79 PK	74	-15.21	-46.07	-50.15	8.17	-36.47
8	23924.1	38.5 AV	54	-15.5	-71.24	-66.09	8.17	-56.76
9	39529.51	43.01 PK	74	-30.99	-63.52	-63.35	8.17	-52.25
10	39529.51	33.22 AV	54	-20.78	-71.84	-75.28	8.17	-62.04

Note: Margin value = Emission Level - Limit value

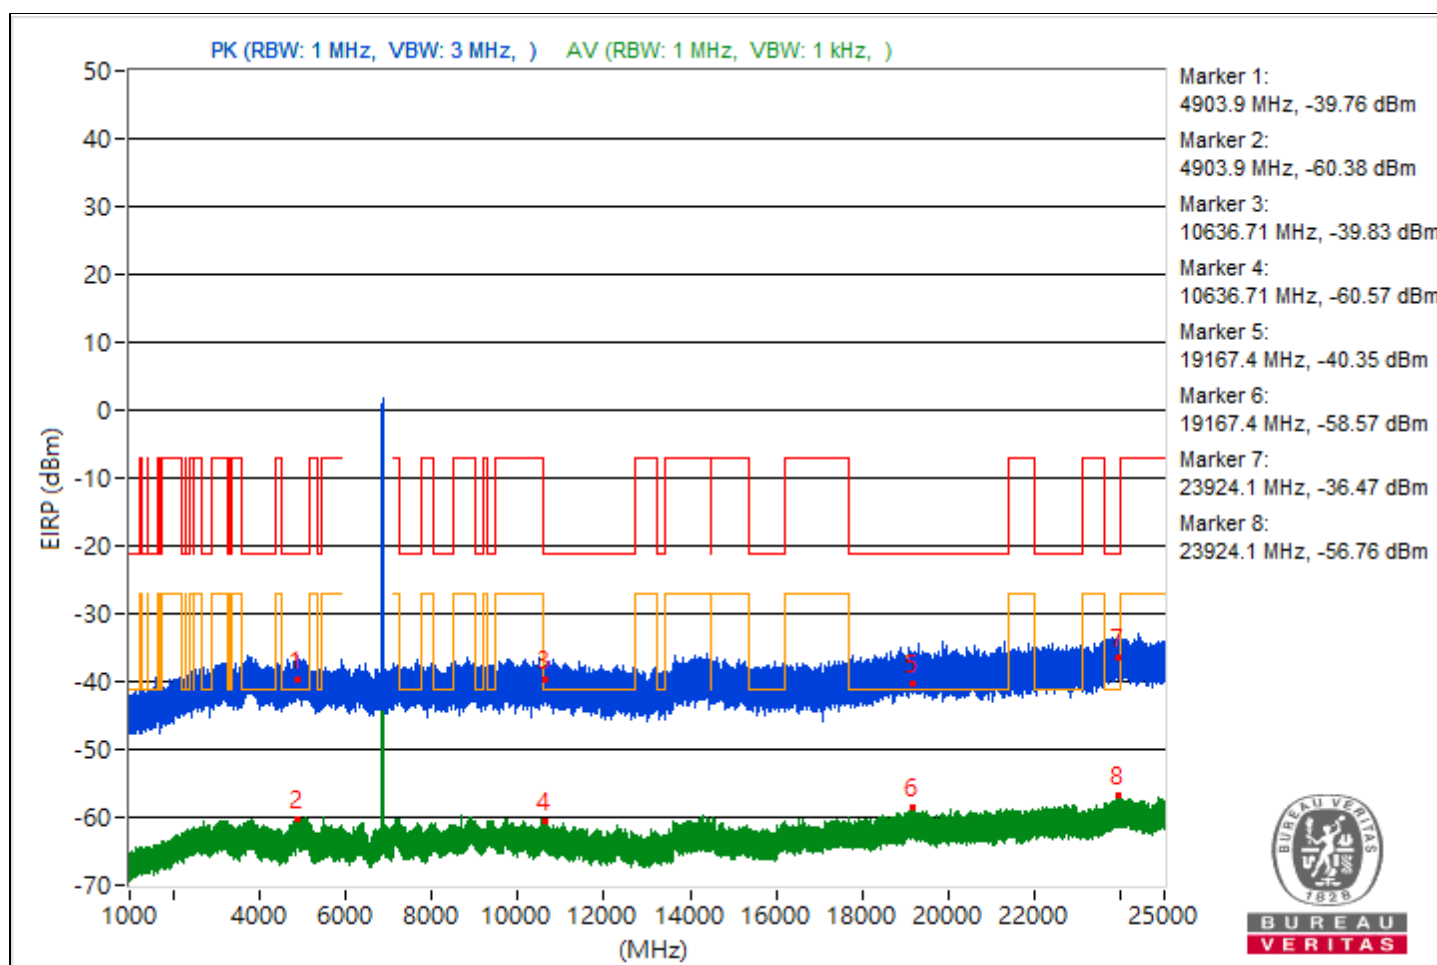


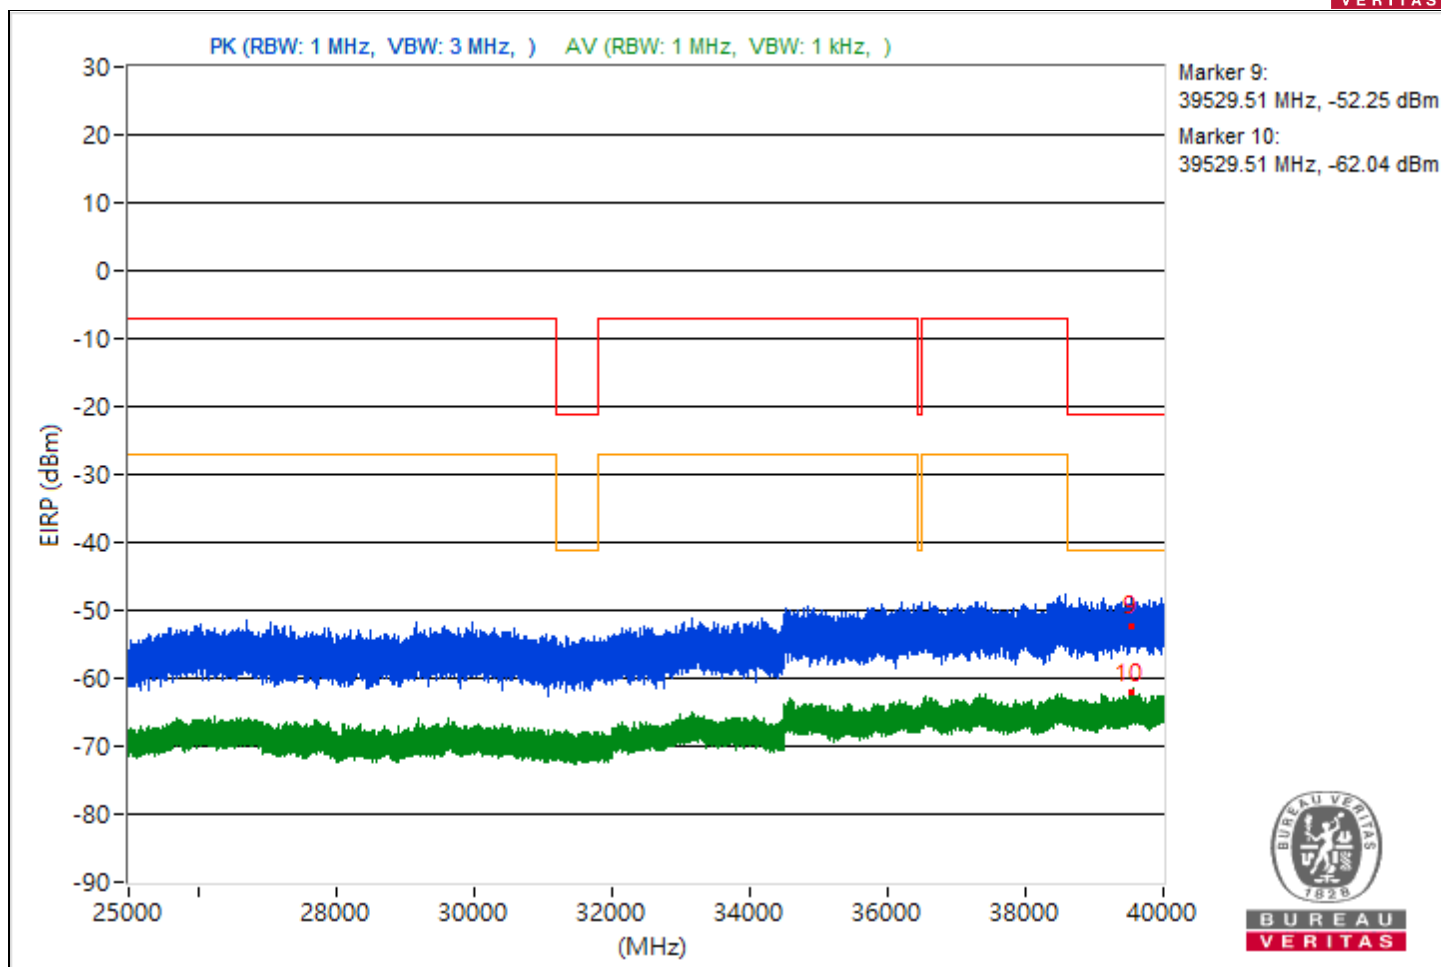


RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5127.67	54.63 PK	74	-19.37	-52.17	-51.48	8.17	-40.63
2	5127.67	35.02 AV	54	-18.98	-70.61	-72.42	8.17	-60.24
3	10609.78	56.07 PK	74	-17.93	-49.32	-51.77	8.17	-39.19
4	10609.78	34.36 AV	54	-19.64	-70.28	-75.21	8.17	-60.9
5	19172.7	56.47 PK	74	-17.53	-51.14	-49.05	8.17	-38.79
6	19172.7	35.47 AV	54	-18.53	-73.92	-69.23	8.17	-59.79
7	23791.3	57.44 PK	74	-16.56	-48.93	-49.07	8.17	-37.82
8	23791.3	37.88 AV	54	-16.12	-67.3	-70.33	8.17	-57.38
9	39991.38	44.3 PK	74	-29.7	-65.17	-60.37	8.17	-50.96
10	39991.38	32.63 AV	54	-21.37	-75.34	-72.68	8.17	-62.63

Note: Margin value = Emission Level - Limit value

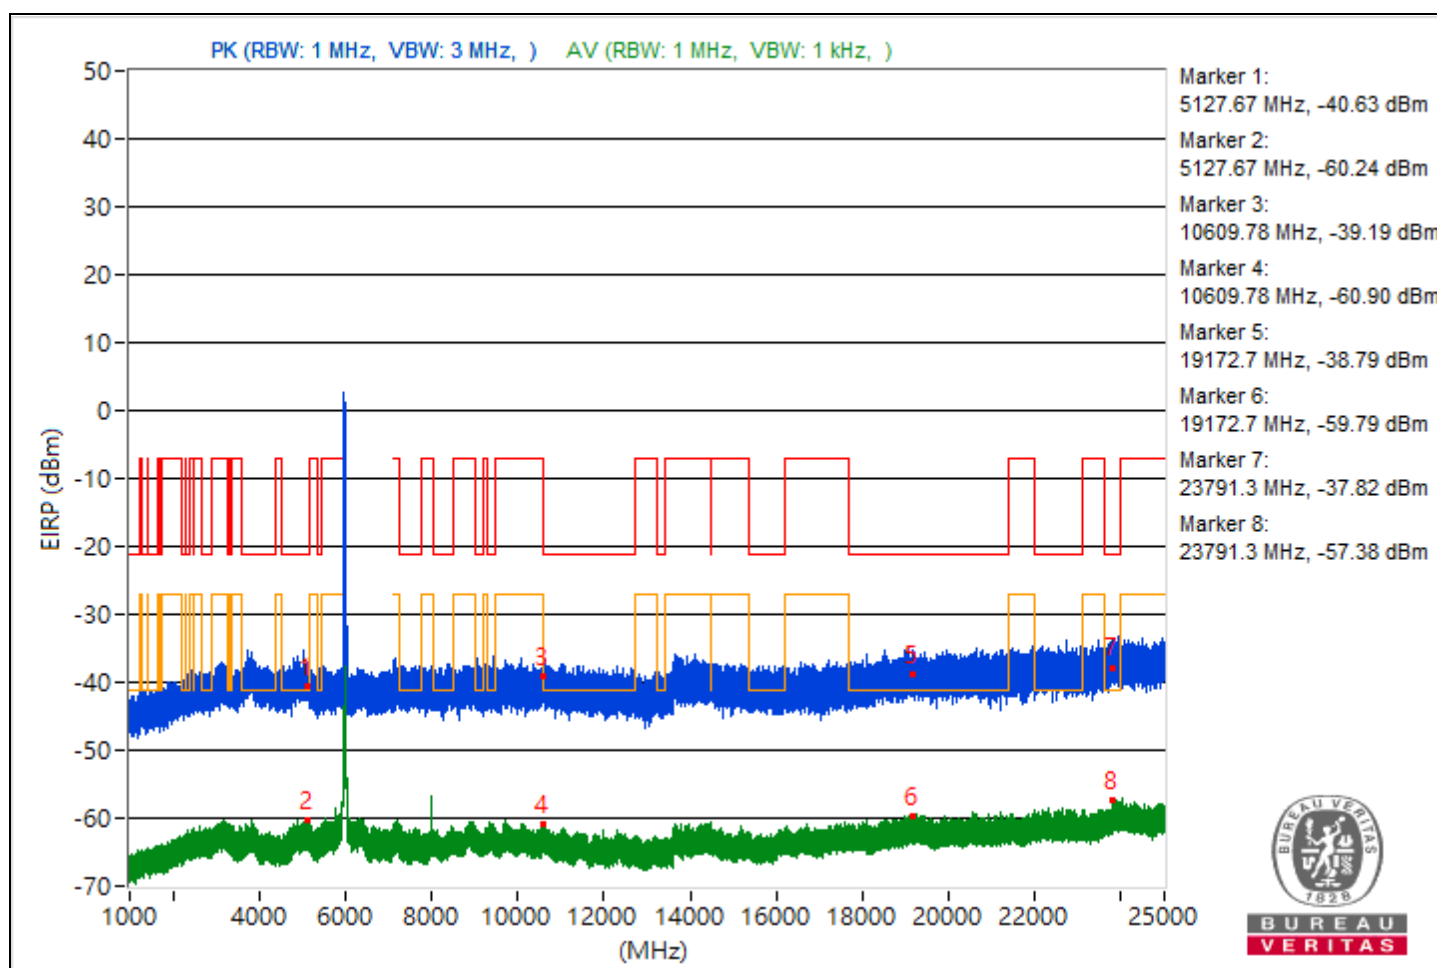


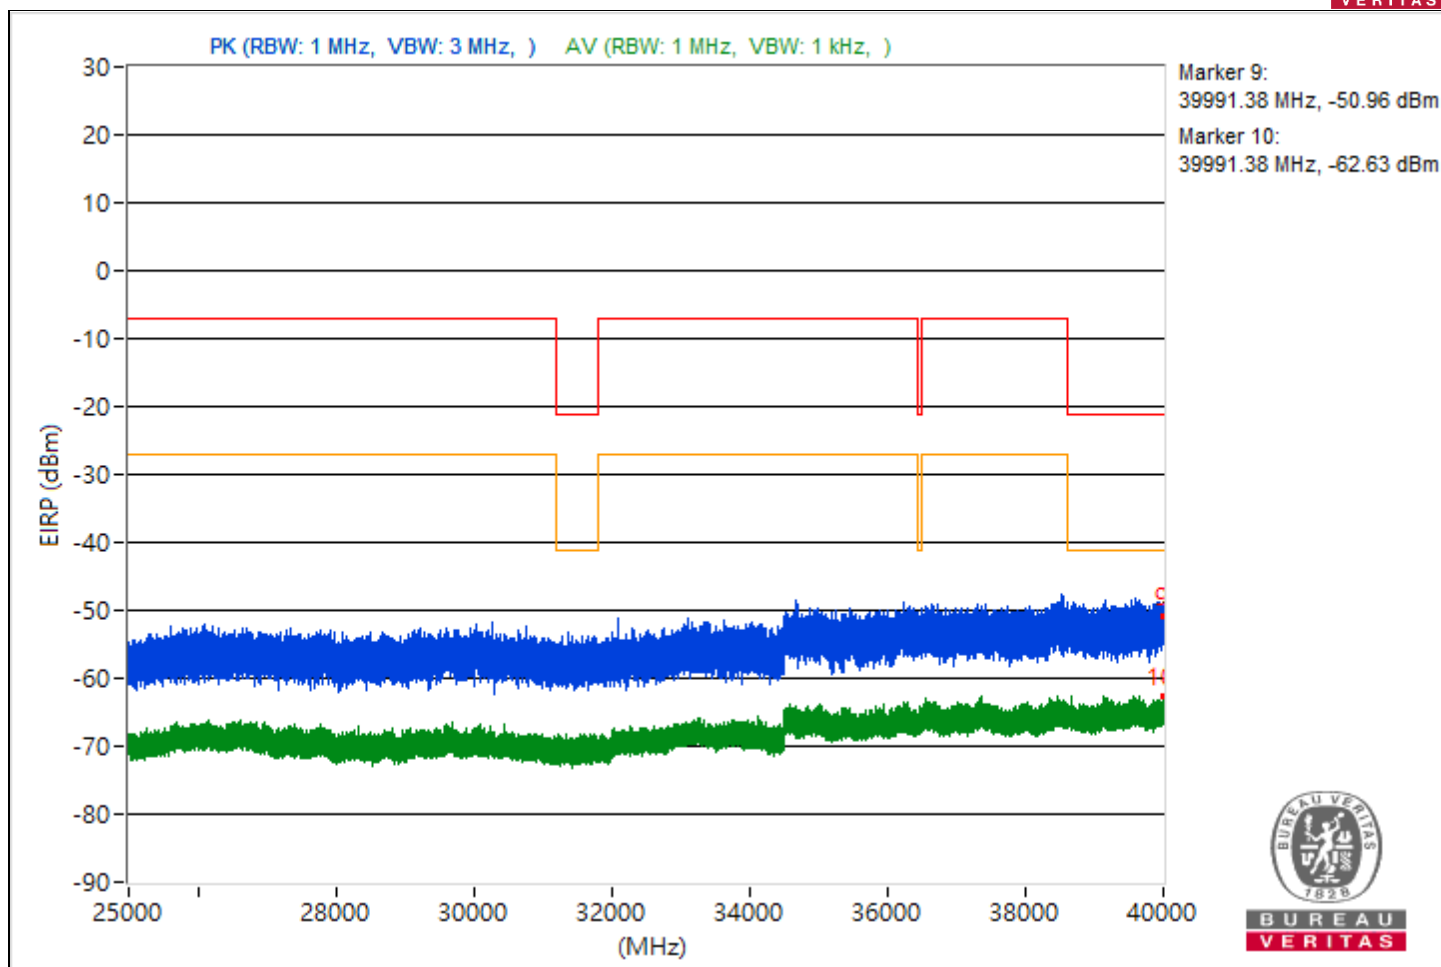


RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5107.13	54.29 PK	74	-19.71	-51.21	-53.35	8.17	-40.97
2	5107.13	35.08 AV	54	-18.92	-70.84	-71.96	8.17	-60.18
3	9309.69	54.73 PK	74	-19.27	-51.31	-52.16	8.17	-40.53
4	9309.69	34.69 AV	54	-19.31	-72.94	-70.81	8.17	-60.57
5	19372.3	58.23 PK	74	-15.77	-46.23	-51.92	8.17	-37.03
6	19372.3	36.15 AV	54	-17.85	-71.85	-69.15	8.17	-59.11
7	23898	58.86 PK	74	-15.14	-49.89	-46.08	8.17	-36.4
8	23898	37.38 AV	54	-16.62	-67.67	-71.11	8.17	-57.88
9	38671.02	43.3 PK	74	-30.7	-65.03	-61.82	8.17	-51.96
10	38671.02	32.63 AV	54	-21.37	-74.84	-72.99	8.17	-62.63

Note: Margin value = Emission Level - Limit value

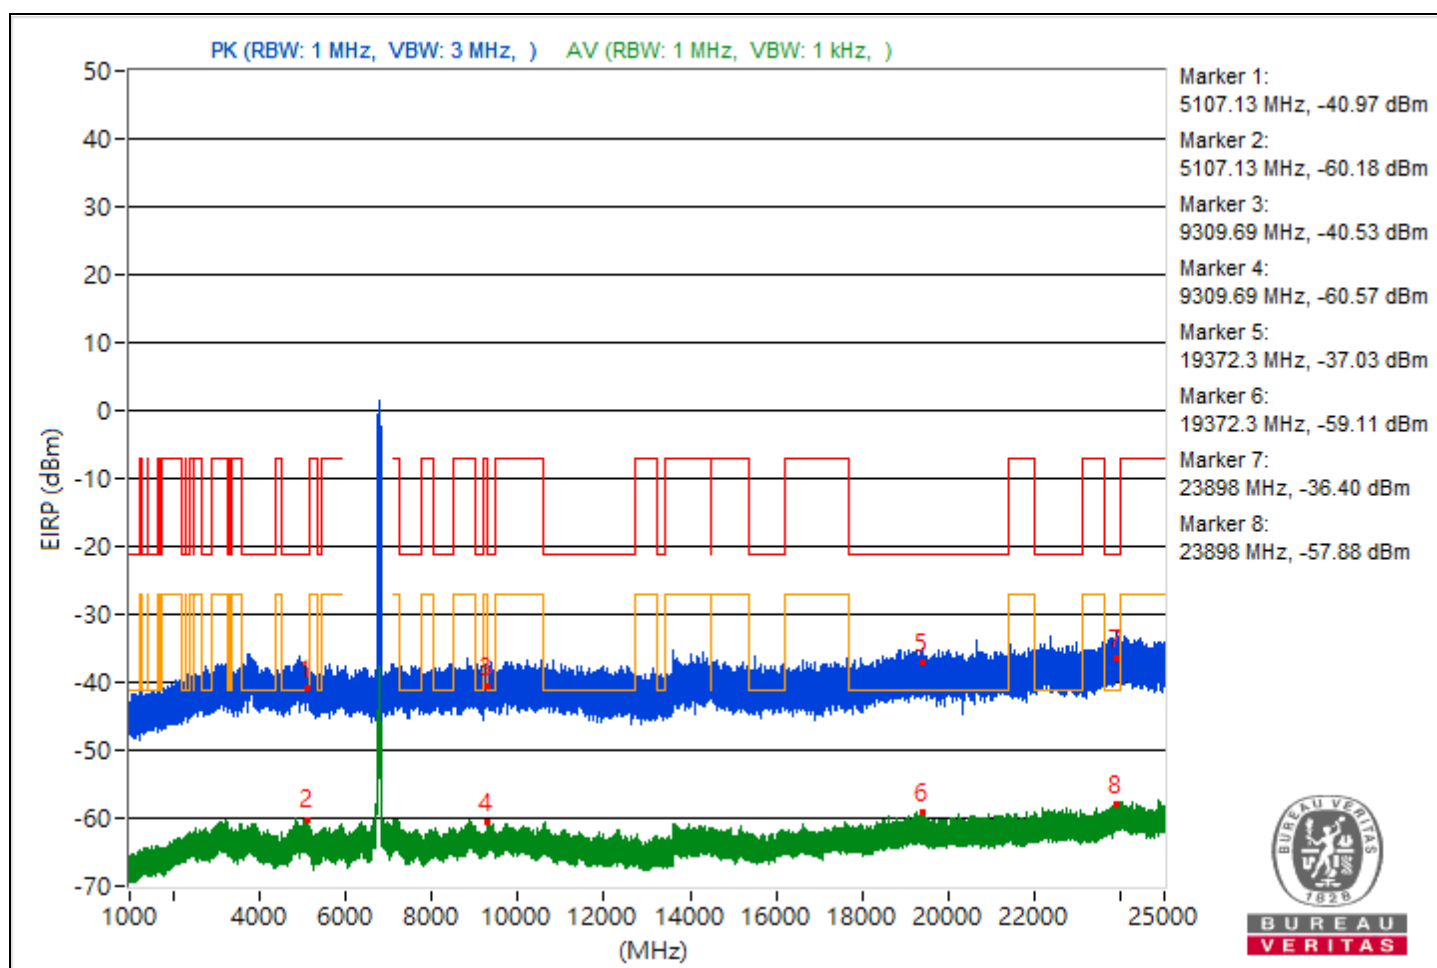


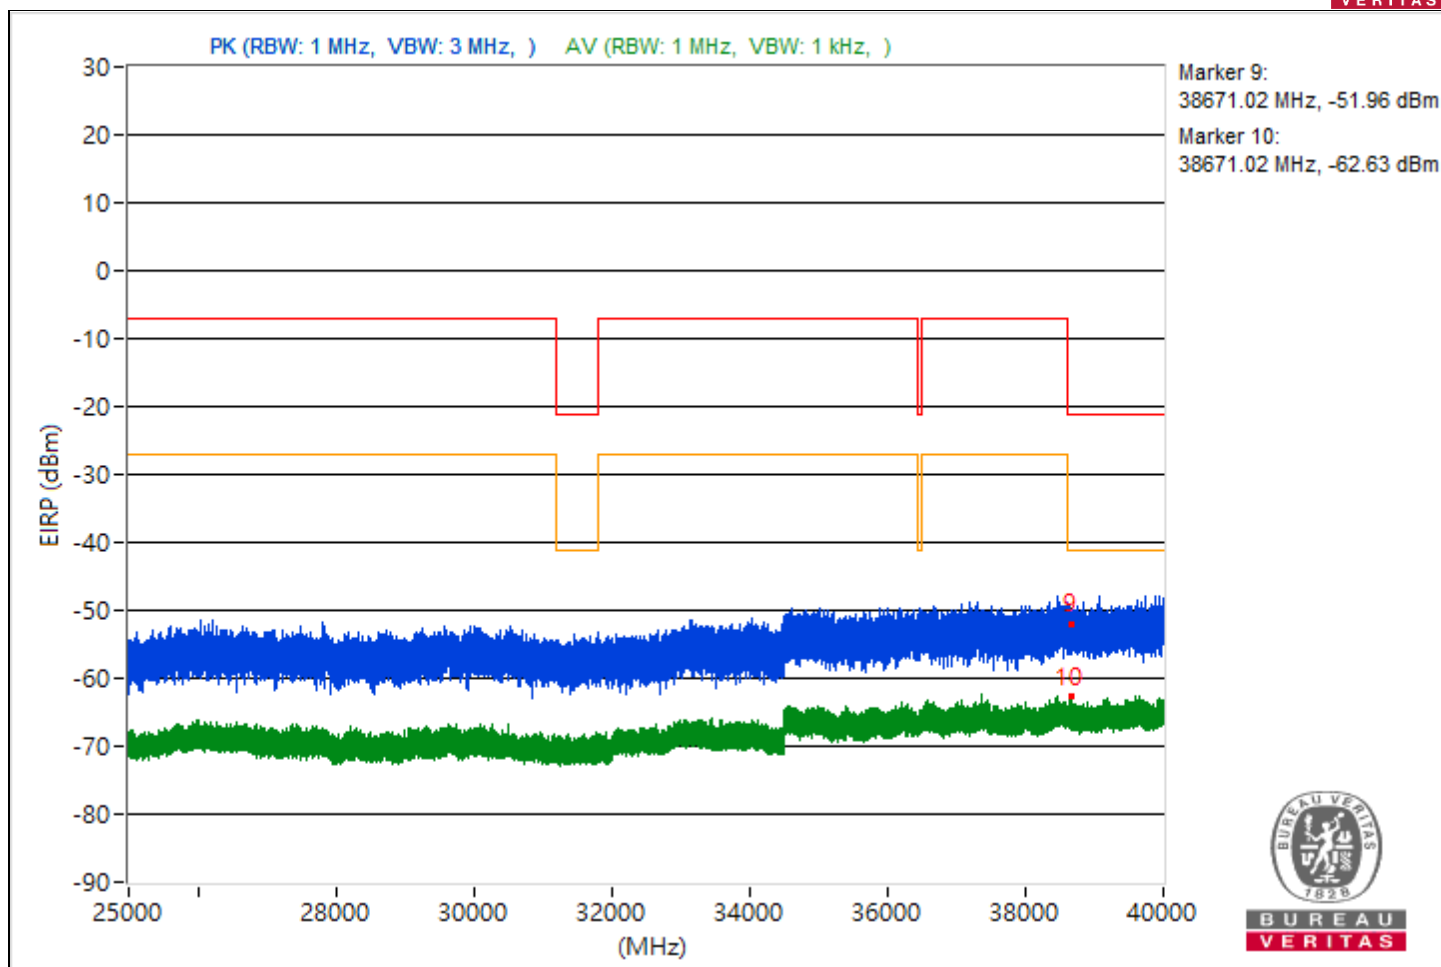


RF Mode	802.11be (EHT160) Punctured by 20 MHz	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5447.72	55.03 PK	74	-18.97	-52.24	-50.72	8.17	-40.23
2	5447.72	36.31 AV	54	-17.69	-71.88	-68.89	8.17	-58.95
3	8033.42	55.58 PK	74	-18.42	-50.45	-51.32	8.17	-39.68
4	8033.42	39.75 AV	54	-14.25	-65.82	-67.79	8.17	-55.51
5	19181.1	56.64 PK	74	-17.36	-48.75	-51.19	8.17	-38.62
6	19181.1	36.54 AV	54	-17.46	-70.54	-69.34	8.17	-58.72
7	23856.1	59.09 PK	74	-14.91	-48.02	-46.77	8.17	-36.17
8	23856.1	37.98 AV	54	-16.02	-69.86	-67.4	8.17	-57.28
9	39661.16	43.82 PK	74	-30.18	-64.05	-61.55	8.17	-51.44
10	39661.16	32.32 AV	54	-21.68	-72.96	-75.73	8.17	-62.94

Note: Margin value = Emission Level - Limit value

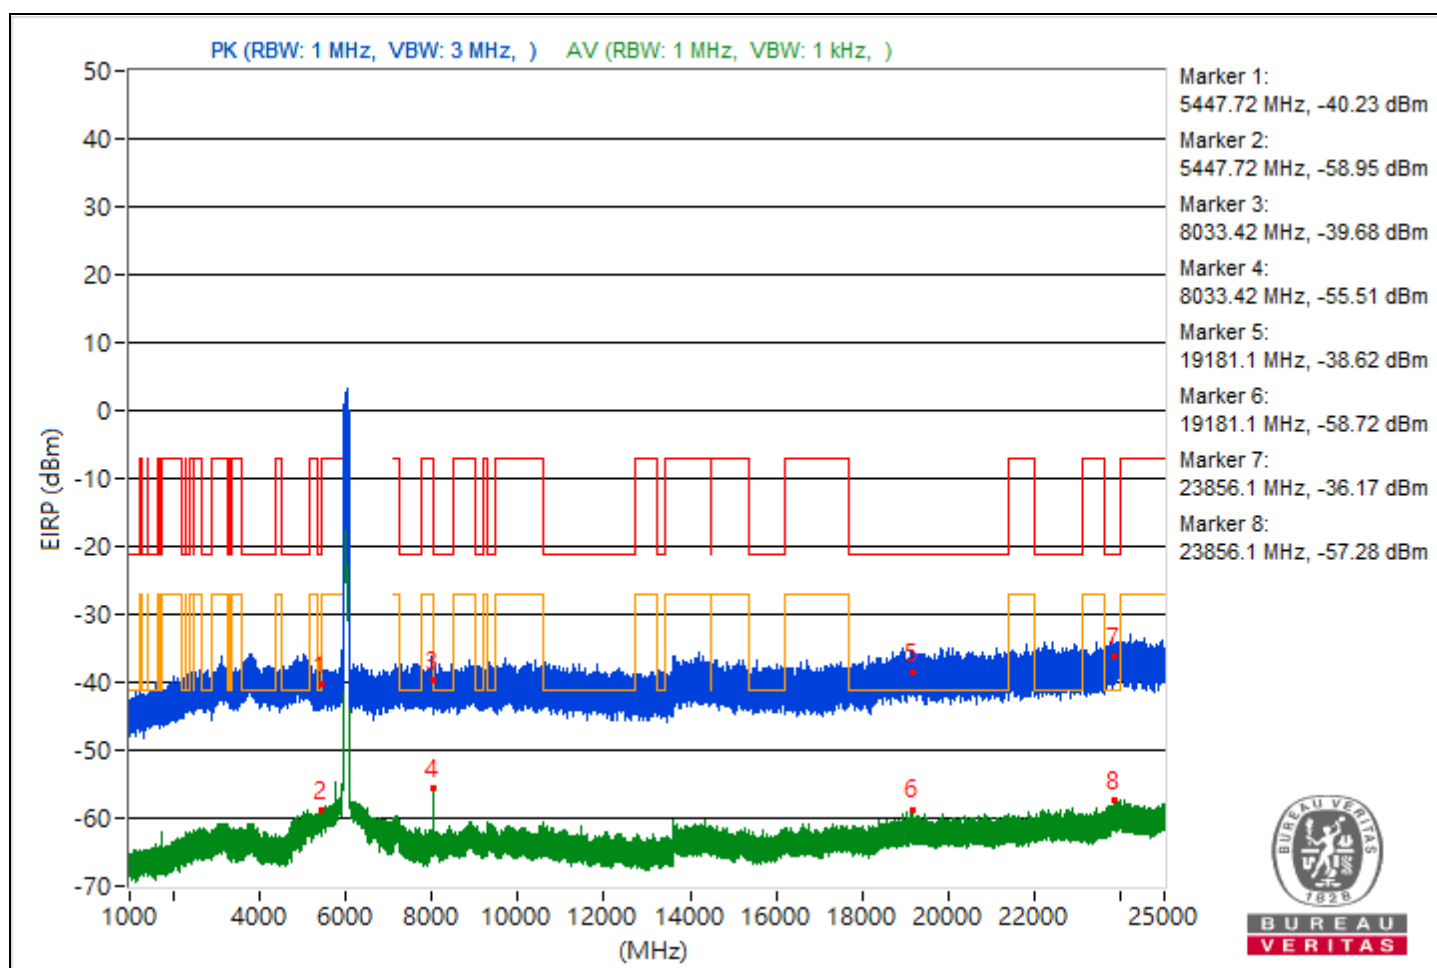


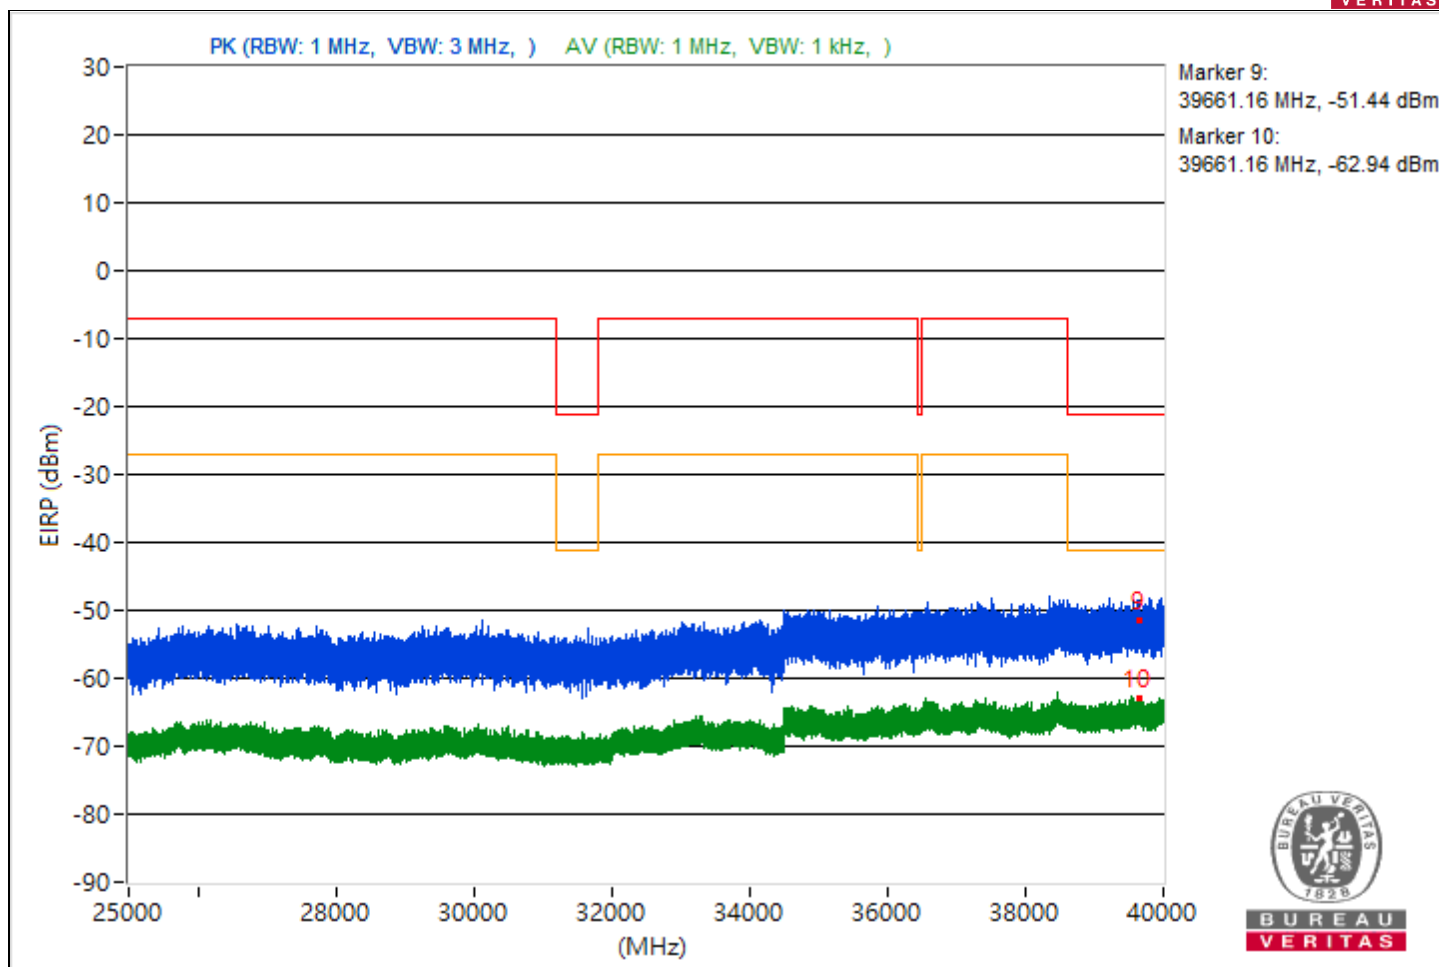


RF Mode	802.11be (EHT160) Punctured by 20 MHz	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5107.44	55.39 PK	74	-18.61	-51.85	-50.37	8.17	-39.87
2	5107.44	36.28 AV	54	-17.72	-69.71	-70.65	8.17	-58.98
3	7262.51	56.92 PK	74	-17.08	-51.1	-48.36	8.17	-38.34
4	7262.51	34.77 AV	54	-19.23	-74.1	-70.13	8.17	-60.49
5	21091.9	56.31 PK	74	-17.69	-52.45	-48.62	8.17	-38.95
6	21091.9	35.79 AV	54	-18.21	-69.23	-72.76	8.17	-59.47
7	23954.2	54.93 PK	74	-19.07	-54.82	-49.65	8.17	-40.33
8	23954.2	37.16 AV	54	-16.84	-71.56	-67.8	8.17	-58.1
9	39534.58	44.42 PK	74	-29.58	-60.02	-65.86	8.17	-50.84
10	39534.58	32.56 AV	54	-21.44	-72.49	-75.96	8.17	-62.7

Note: Margin value = Emission Level - Limit value

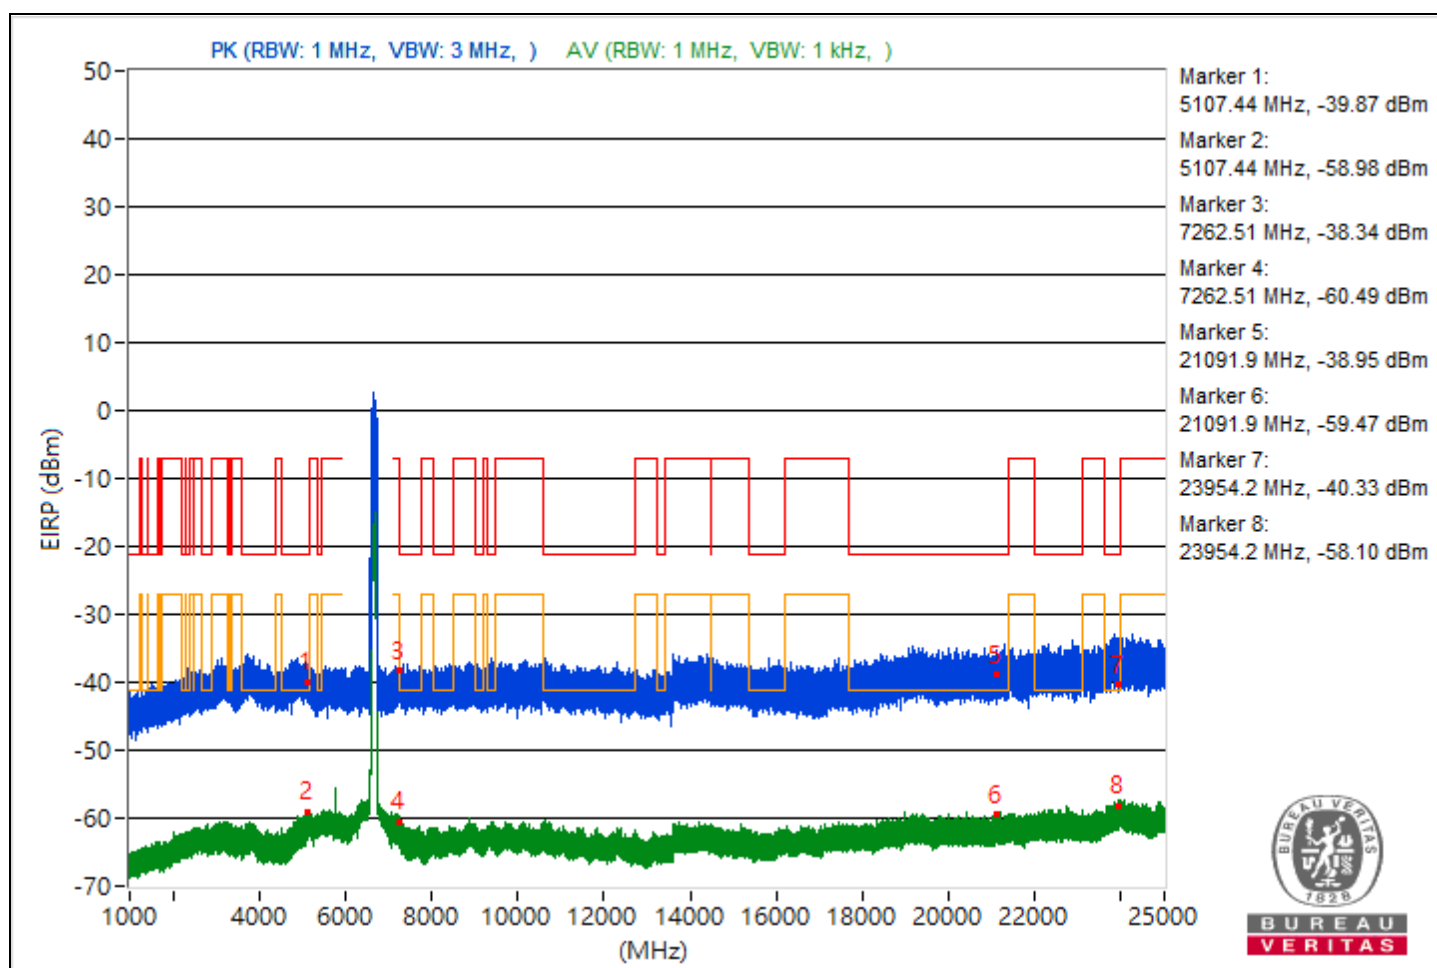


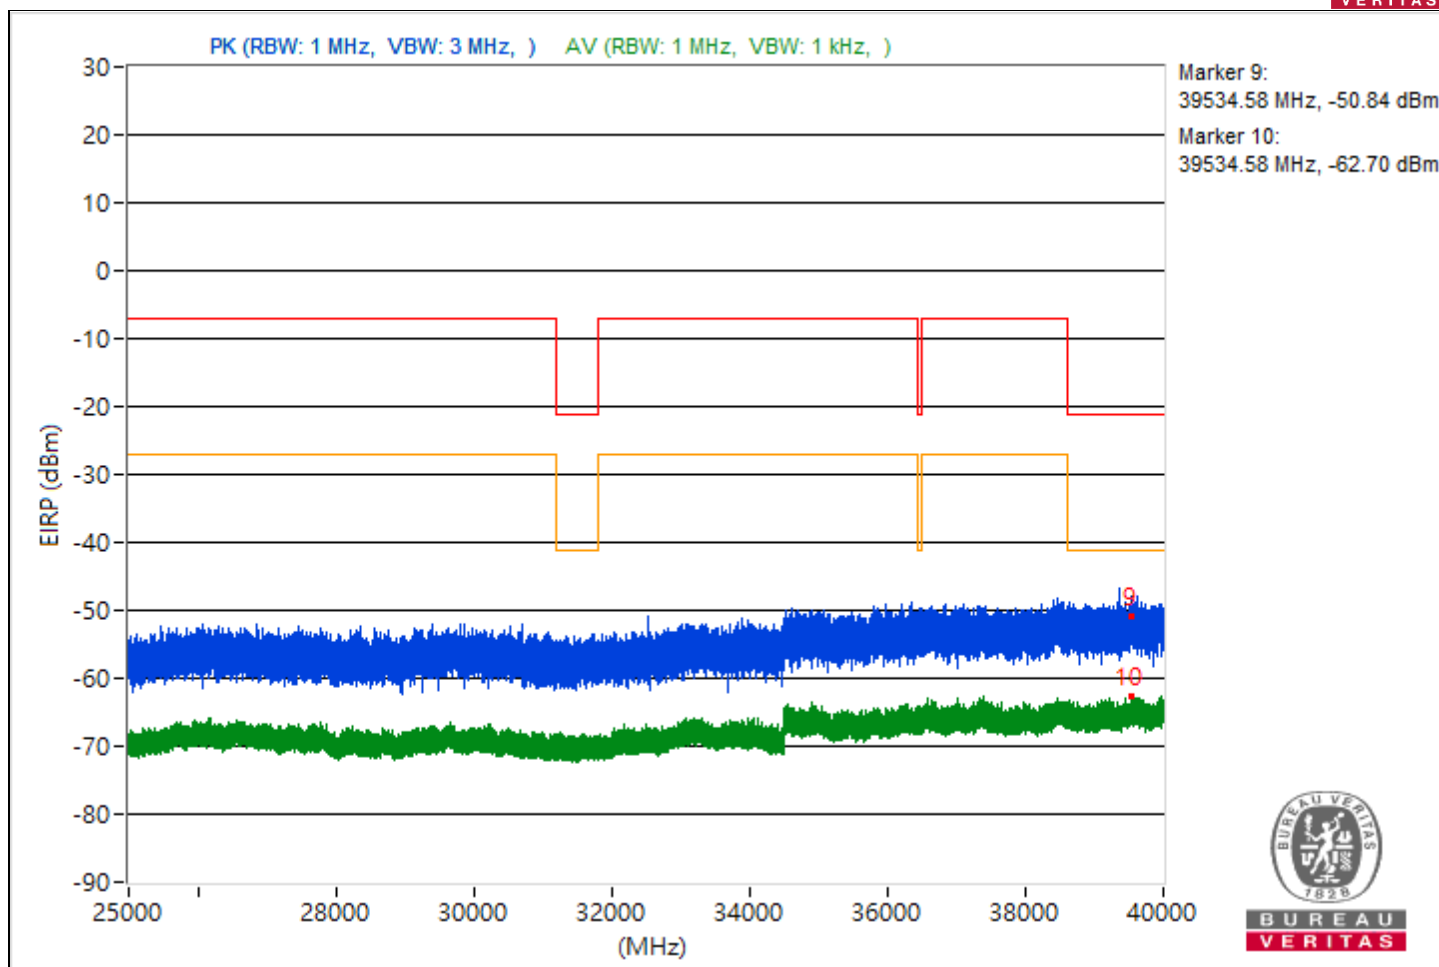


RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4906.39	55.81 PK	74	-18.19	-50.01	-51.35	8.17	-39.45
2	4906.39	37.1 AV	54	-16.9	-67.84	-71.66	8.17	-58.16
3	8033.33	55.37 PK	74	-18.63	-51.39	-50.78	8.17	-39.89
4	8033.33	39.33 AV	54	-14.67	-65.96	-68.67	8.17	-55.93
5	20831	55.76 PK	74	-18.24	-49.94	-51.57	8.17	-39.5
6	20831	35.47 AV	54	-18.53	-69.52	-73.16	8.17	-59.79
7	23984.7	57.12 PK	74	-16.88	-48.77	-49.95	8.17	-38.14
8	23984.7	37.37 AV	54	-16.63	-68.1	-70.33	8.17	-57.89
9	39849.24	43.61 PK	74	-30.39	-63.26	-62.45	8.17	-51.65
10	39849.24	31.92 AV	54	-22.08	-72.84	-77.28	8.17	-63.34

Note: Margin value = Emission Level - Limit value

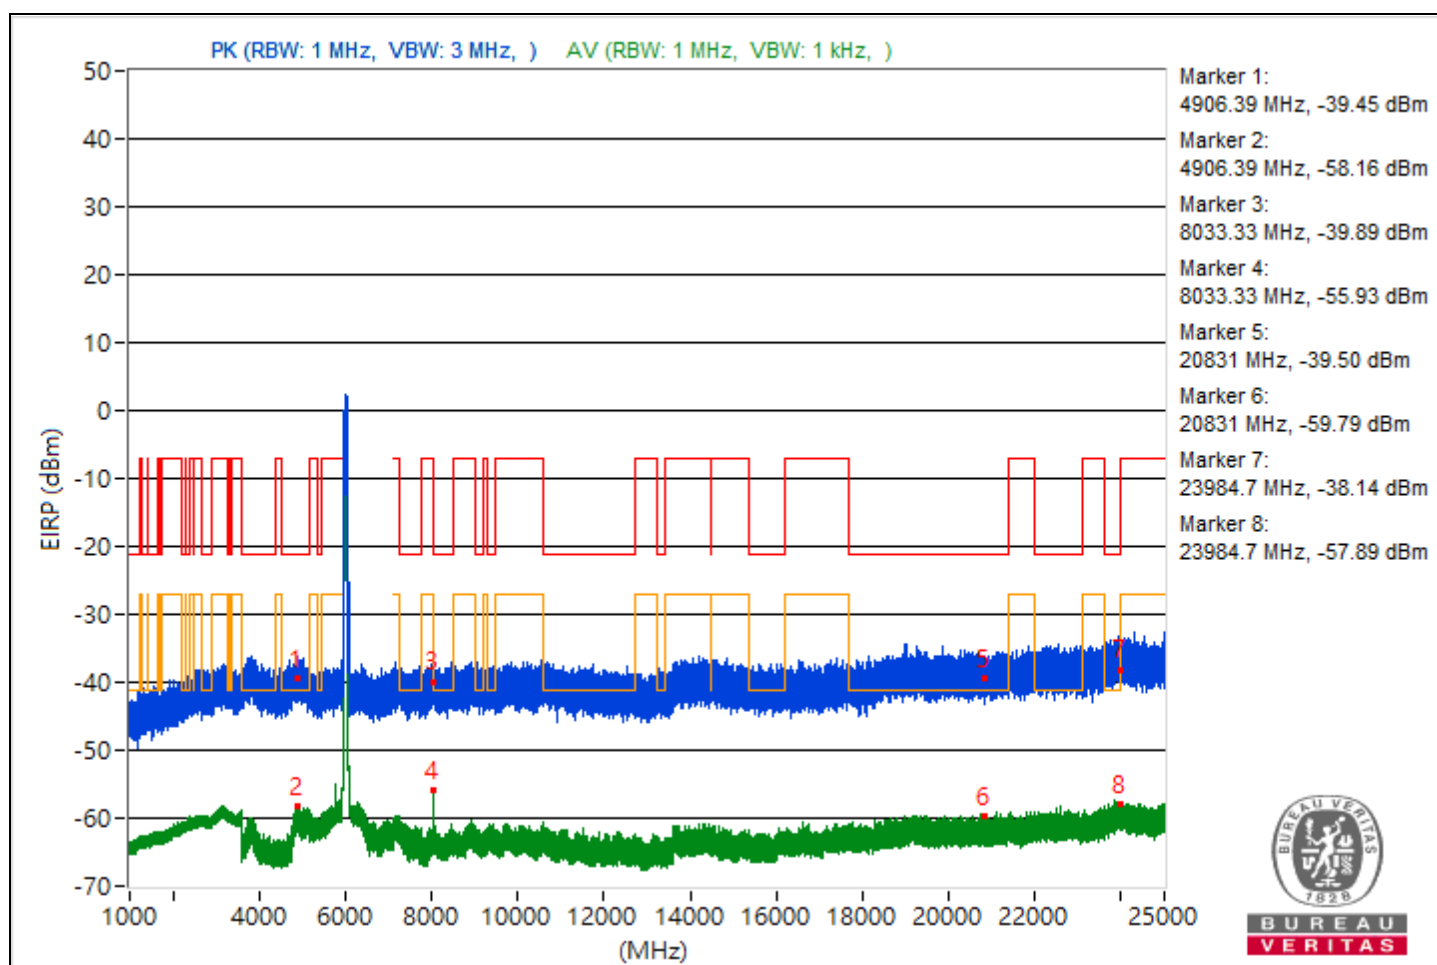


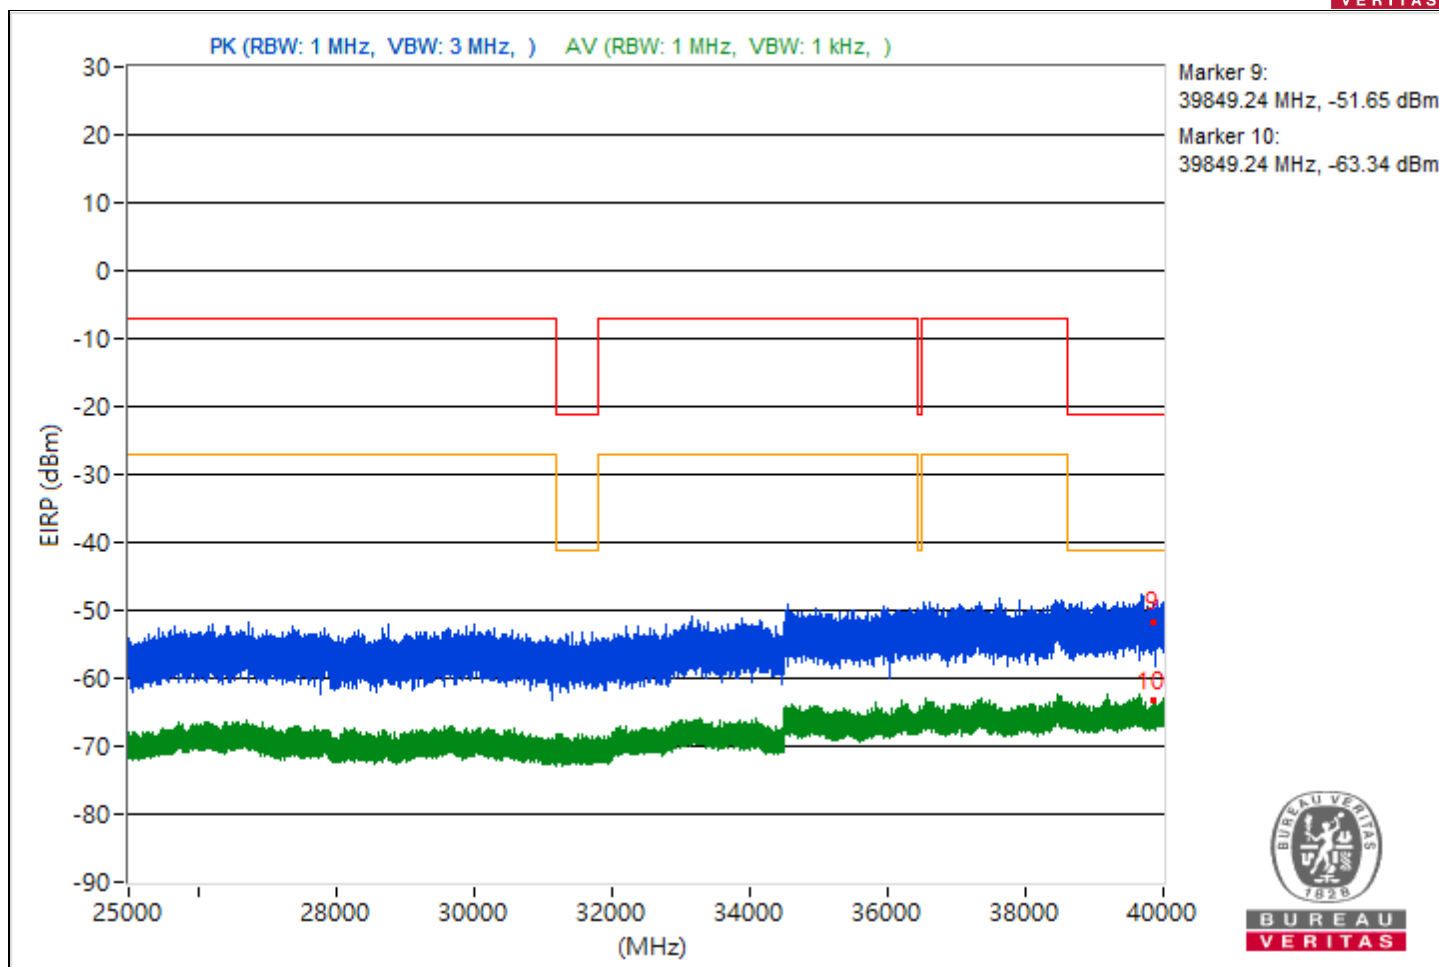


RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5097.8	54.58 PK	74	-19.42	-50.99	-52.95	8.17	-40.68
2	5097.8	35.64 AV	54	-18.36	-73.74	-69.06	8.17	-59.62
3	7283.59	56.03 PK	74	-17.97	-50.43	-50.39	8.17	-39.23
4	7283.59	34.25 AV	54	-19.75	-74.67	-70.62	8.17	-61.01
5	19492.6	55.52 PK	74	-18.48	-50.71	-51.15	8.17	-39.74
6	19492.6	35.59 AV	54	-18.41	-69.22	-73.48	8.17	-59.67
7	23942.9	58.46 PK	74	-15.54	-47.48	-48.55	8.17	-36.8
8	23942.9	37.67 AV	54	-16.33	-71.63	-67.06	8.17	-57.59
9	39172.98	43.92 PK	74	-30.08	-61.7	-63.54	8.17	-51.34
10	39172.98	32.2 AV	54	-21.8	-77.01	-72.56	8.17	-63.06

Note: Margin value = Emission Level - Limit value

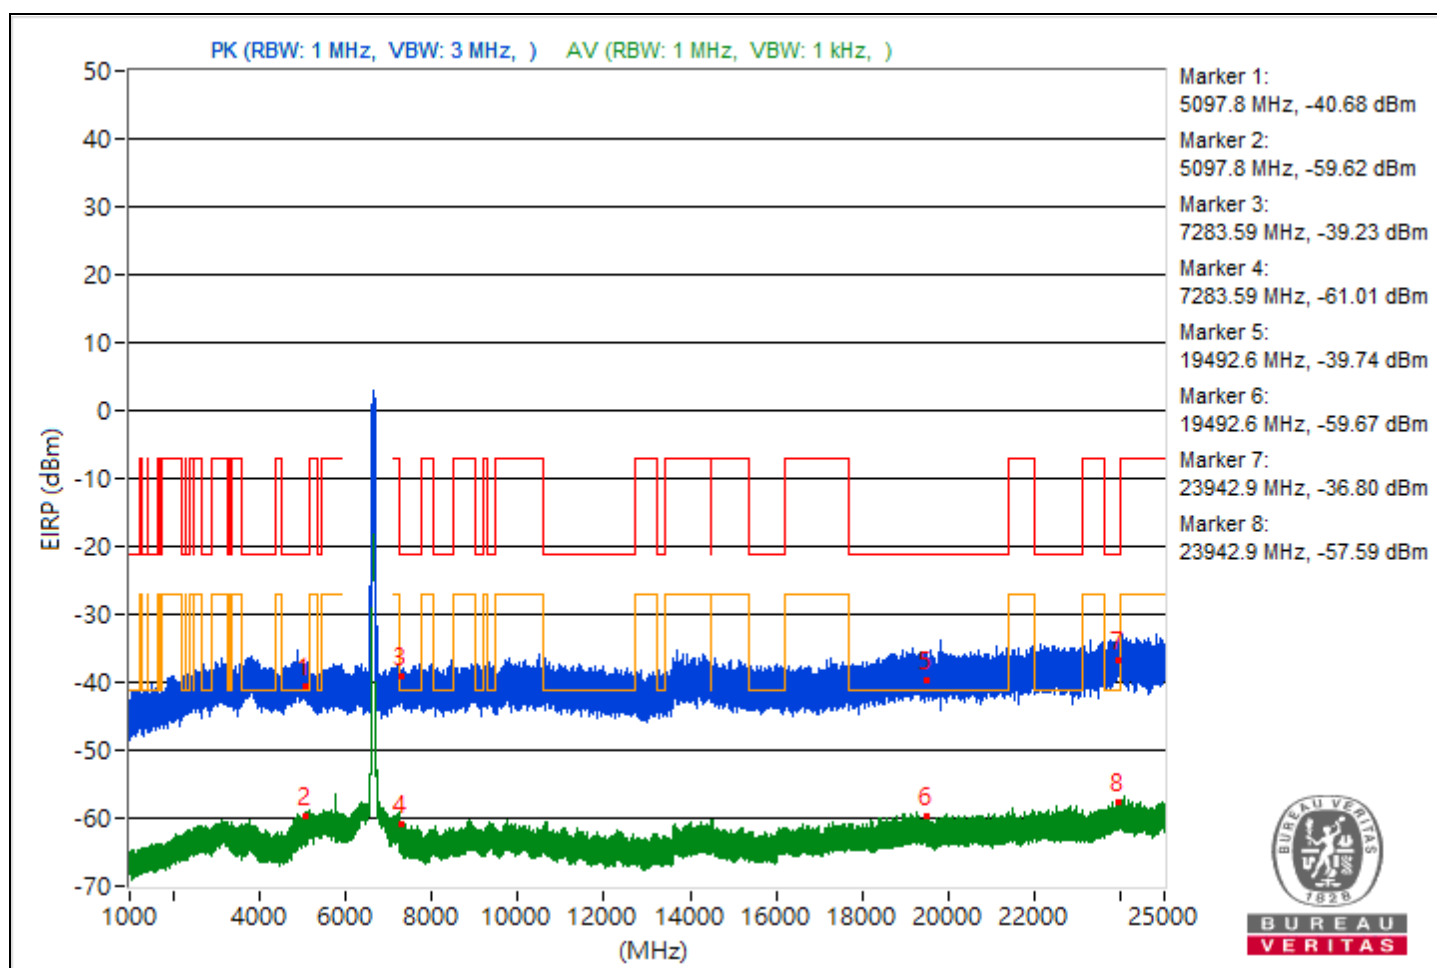


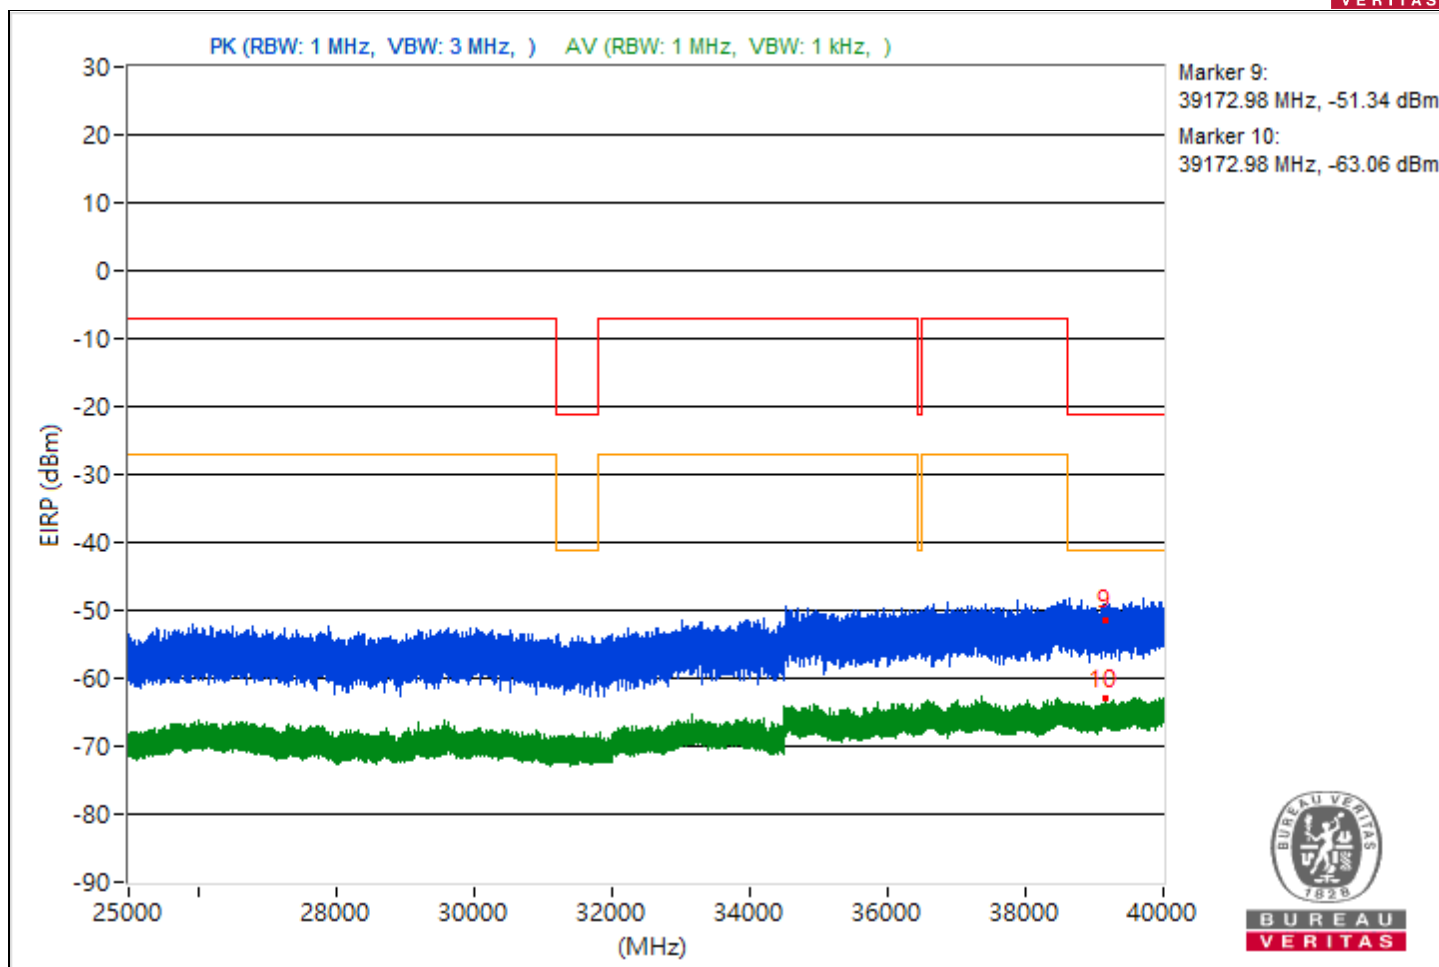


RF Mode	802.11be (EHT320) Punctured by 40 MHz	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5107.13	55.48 PK	74	-18.52	-51.17	-50.77	8.17	-39.78
2	5107.13	35.9 AV	54	-18.1	-70.03	-71.12	8.17	-59.36
3	7280.24	52.31 PK	74	-21.69	-53.59	-54.75	8.17	-42.95
4	7280.24	35.09 AV	54	-18.91	-70.29	-72.76	8.17	-60.17
5	21197.3	57.15 PK	74	-16.85	-47.8	-51.56	8.17	-38.11
6	21197.3	35.97 AV	54	-18.03	-68.91	-72.92	8.17	-59.29
7	23971.6	57.51 PK	74	-16.49	-49.47	-48.46	8.17	-37.75
8	23971.6	37.04 AV	54	-16.96	-72.82	-67.52	8.17	-58.22
9	39149.96	42.2 PK	74	-31.8	-65.43	-63.31	8.17	-53.06
10	39149.96	32.42 AV	54	-21.58	-72.94	-75.45	8.17	-62.84

Note: Margin value = Emission Level - Limit value

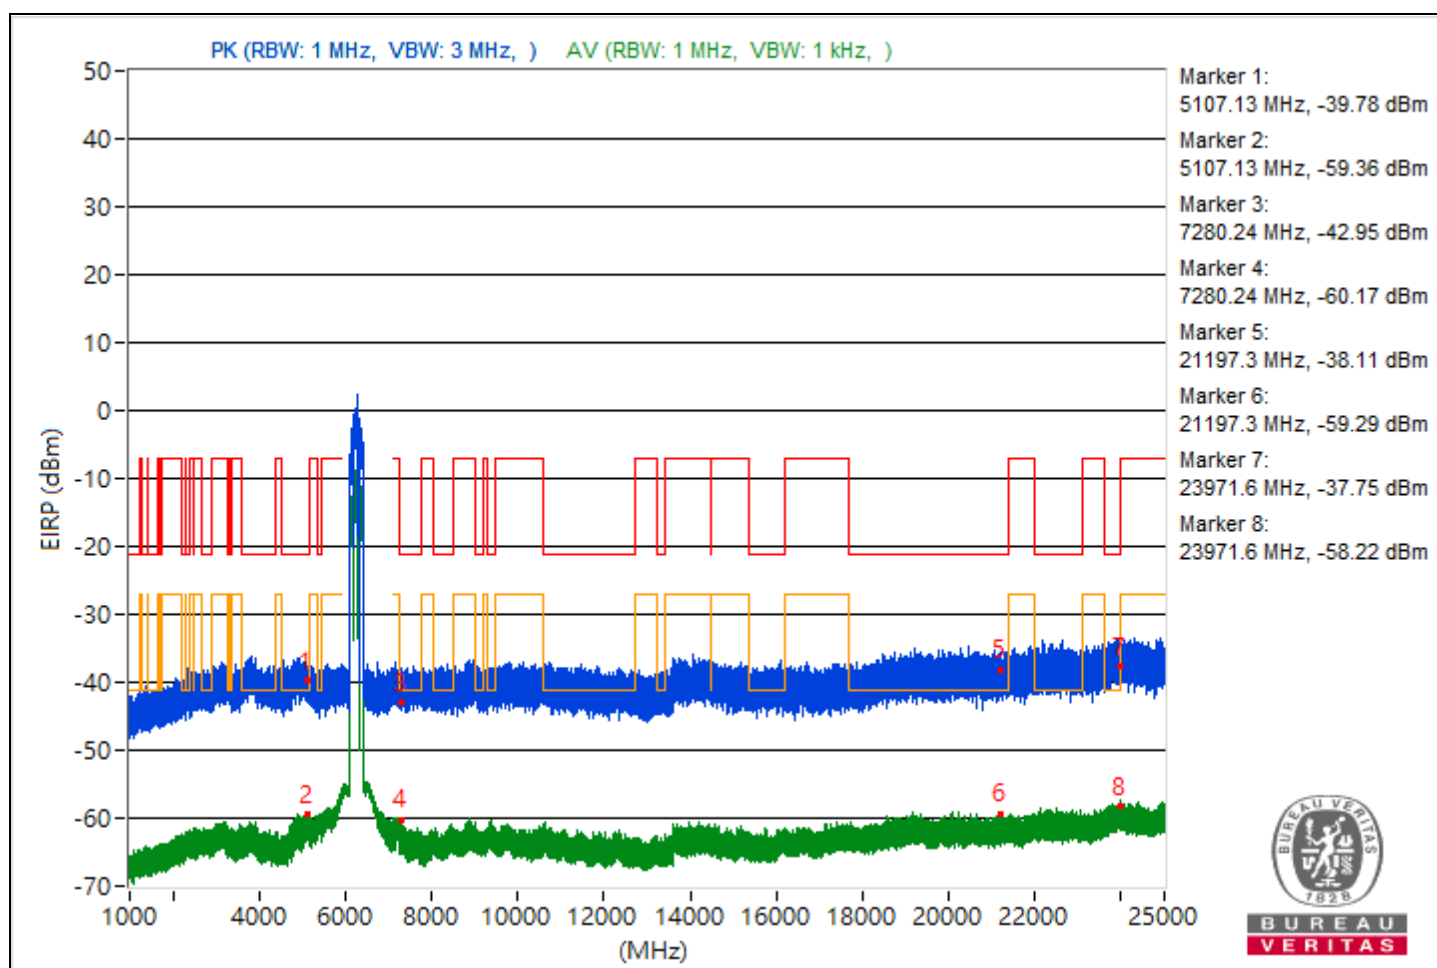


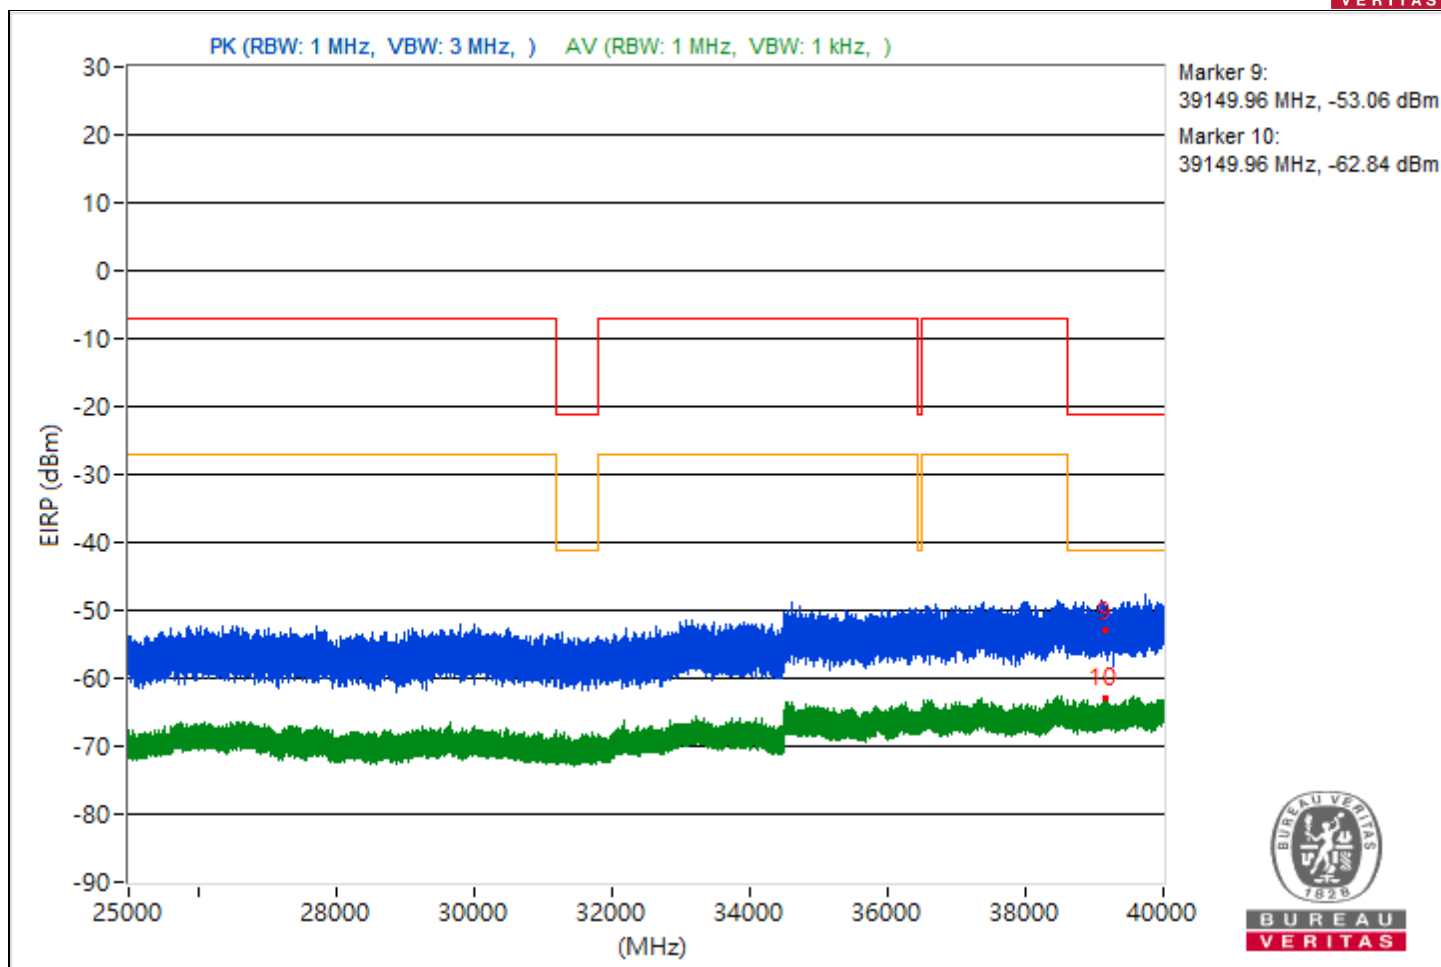


RF Mode	802.11be (EHT320) Punctured by 80 MHz	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5141.82	53.92 PK	74	-20.08	-53.38	-51.81	8.17	-41.34
2	5141.82	36.13 AV	54	-17.87	-71.99	-69.1	8.17	-59.13
3	7265.39	56.03 PK	74	-17.97	-51.91	-49.29	8.17	-39.23
4	7265.39	34.19 AV	54	-19.81	-70.97	-74.08	8.17	-61.07
5	19296.1	57.08 PK	74	-16.92	-49.63	-49.11	8.17	-38.18
6	19296.1	35.7 AV	54	-18.3	-73.7	-69	8.17	-59.56
7	23929.3	58.19 PK	74	-15.81	-48.8	-47.76	8.17	-37.07
8	23929.3	37.96 AV	54	-16.04	-69.94	-67.4	8.17	-57.3
9	39614.93	43.23 PK	74	-30.77	-62.34	-64.29	8.17	-52.03
10	39614.93	32.71 AV	54	-21.29	-73.14	-74.41	8.17	-62.55

Note: Margin value = Emission Level - Limit value

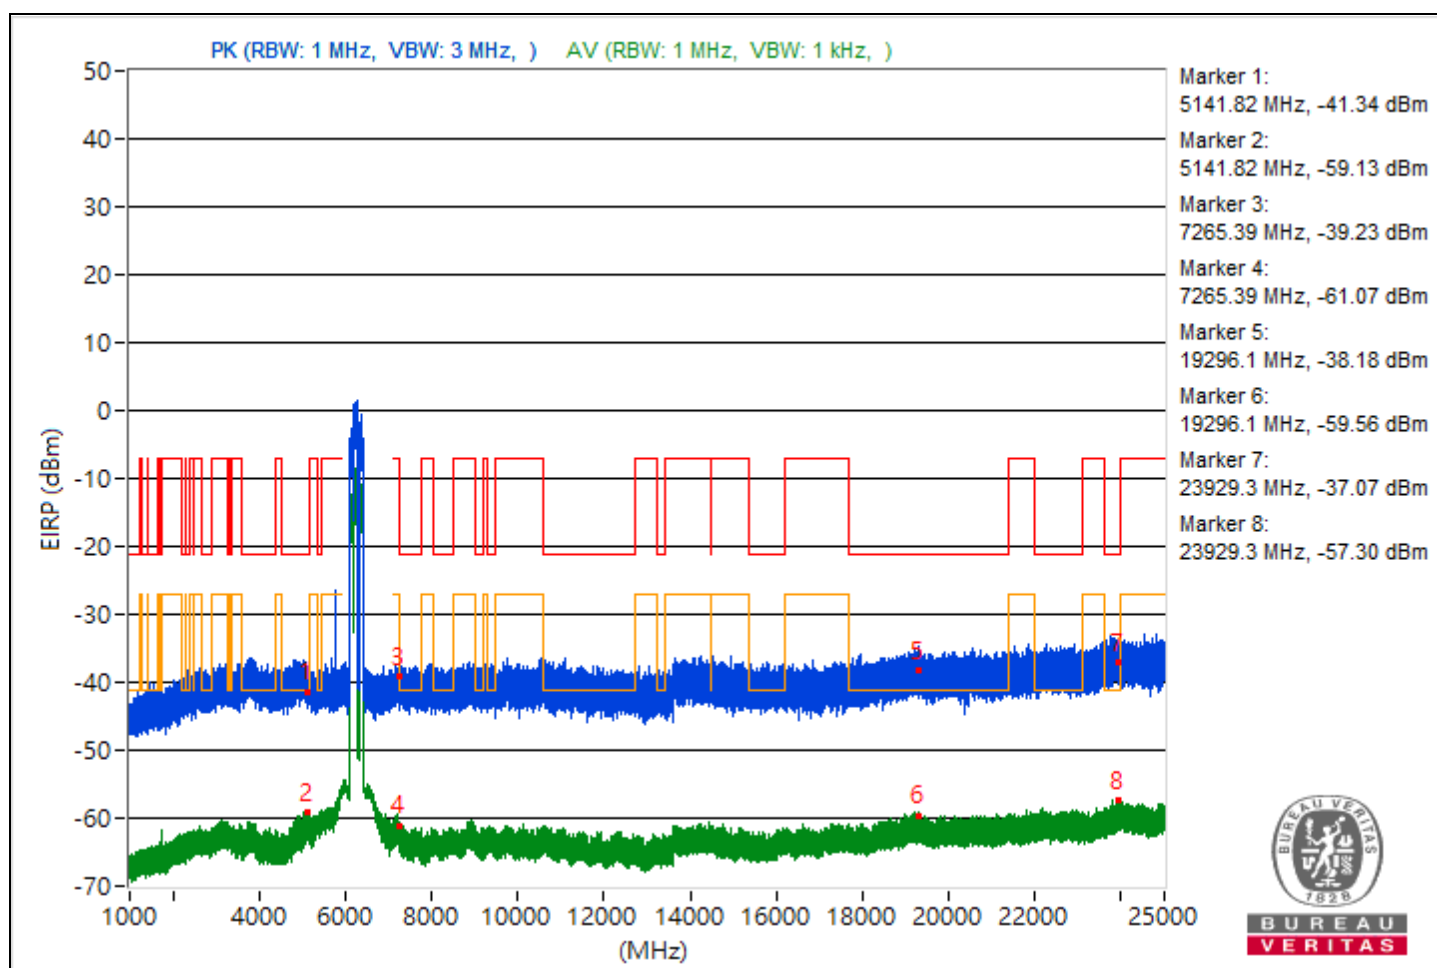


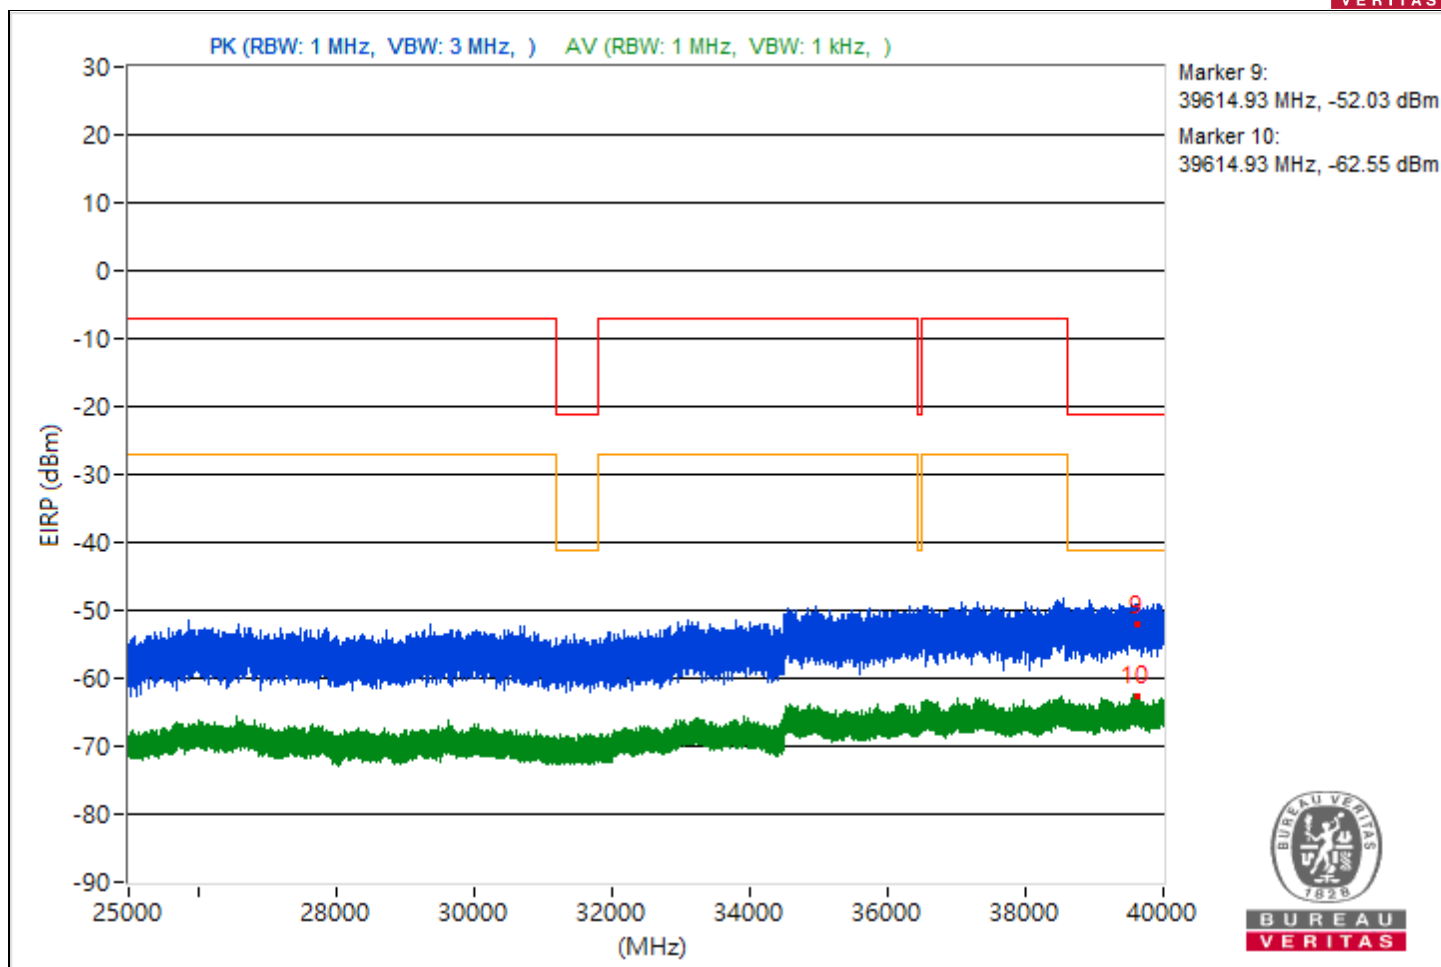

RF Mode	802.11be (EHT320) Punctured by 80+40 MHz	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5439.94	54.02 PK	74	-19.98	-52.27	-52.58	8.17	-41.24
2	5439.94	36.21 AV	54	-17.79	-71.44	-69.28	8.17	-59.05
3	7287.17	56.7 PK	74	-17.3	-49.37	-50.13	8.17	-38.56
4	7287.17	34.46 AV	54	-19.54	-70.88	-73.46	8.17	-60.8
5	18954	57.45 PK	74	-16.55	-49.18	-48.81	8.17	-37.81
6	18954	35.61 AV	54	-18.39	-73.97	-69.03	8.17	-59.65
7	23931.1	58.65 PK	74	-15.35	-46.83	-49.04	8.17	-36.61
8	23931.1	37.34 AV	54	-16.66	-72.31	-67.27	8.17	-57.92
9	39163.64	42.28 PK	74	-31.72	-62.71	-66.34	8.17	-52.98
10	39163.64	32.77 AV	54	-21.23	-72.73	-74.86	8.17	-62.49

Note: Margin value = Emission Level - Limit value

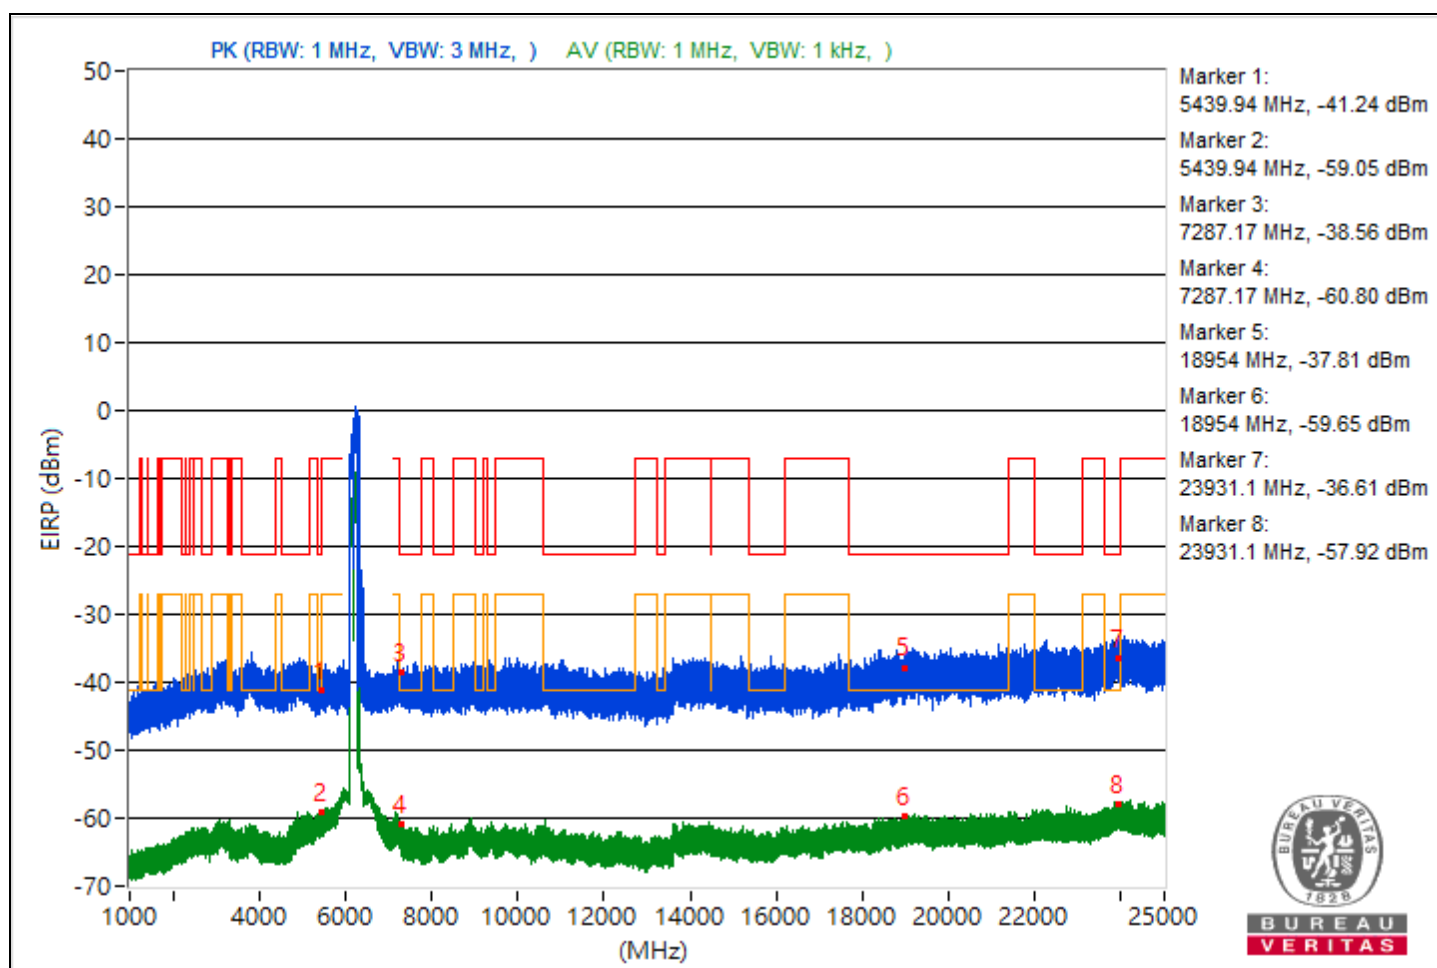




Conducted Band Edges

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5937.93	97.28 PK			-9.23	-9.04	8.15	2.02
2	*5937.93	89.29 AV			-17.49	-16.8	8.15	-5.97
3	#5924.98	79.19 PK	88.26	-9.07	-28.06	-26.53	8.15	-16.07
4	#5924.98	66.97 AV	68.26	-1.29	-39.83	-39.1	8.15	-28.29

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

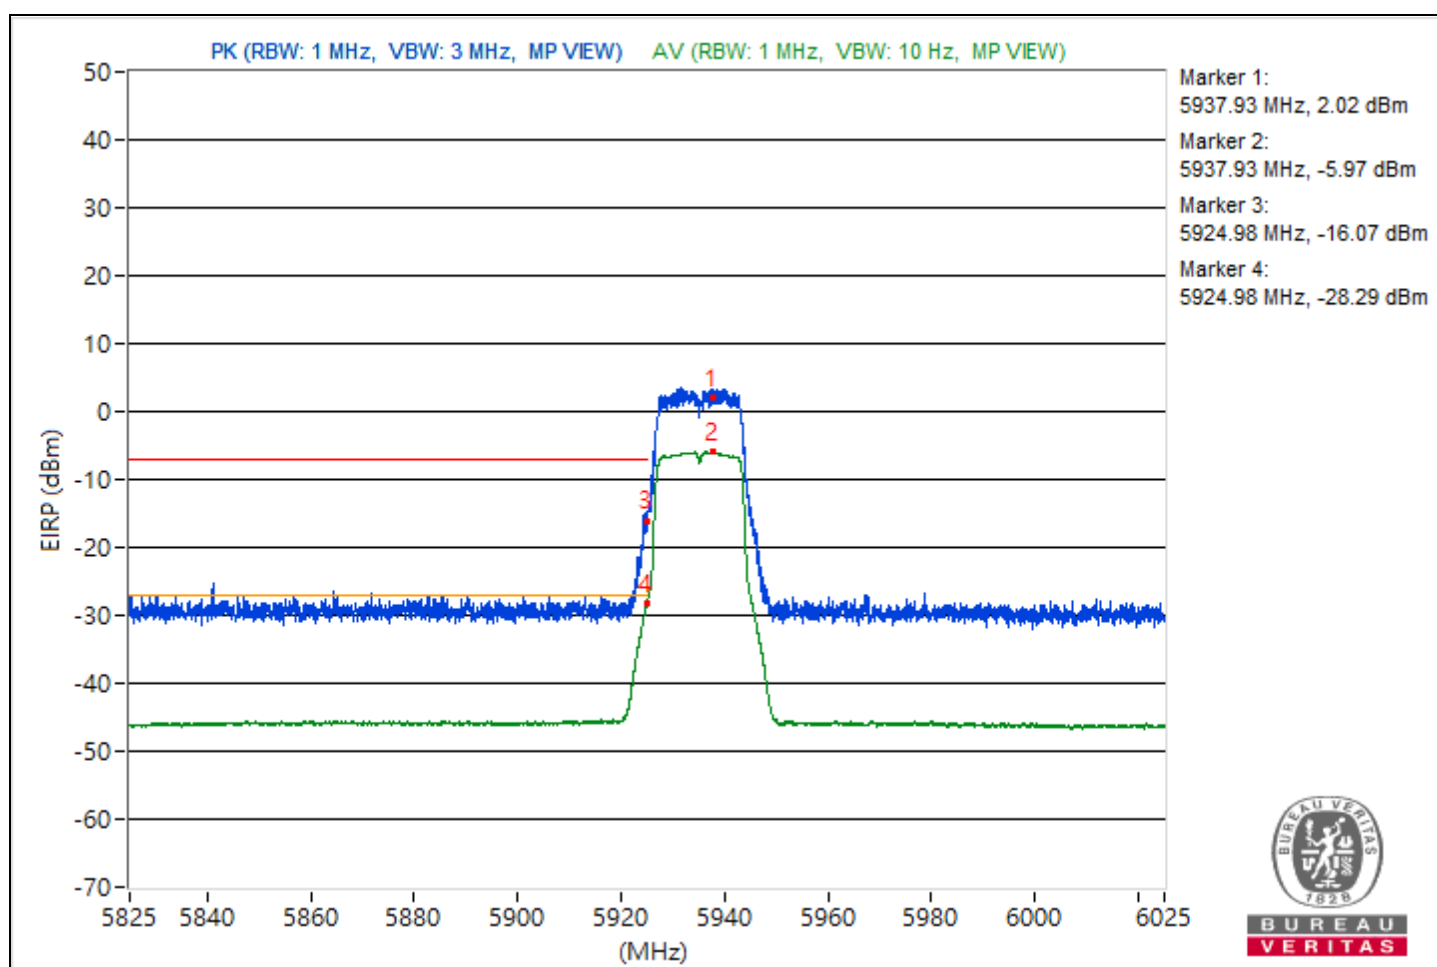


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5954.23	97.97 PK			-9.38	-7.69	8.15	2.71
2	*5954.23	89.15 AV			-17.84	-16.77	8.15	-6.11
3	#5924.5	64.69 PK	88.26	-23.57	-41.37	-42.11	8.15	-30.57
4	#5924.5	49.88 AV	68.26	-18.38	-56.5	-56.58	8.15	-45.38

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

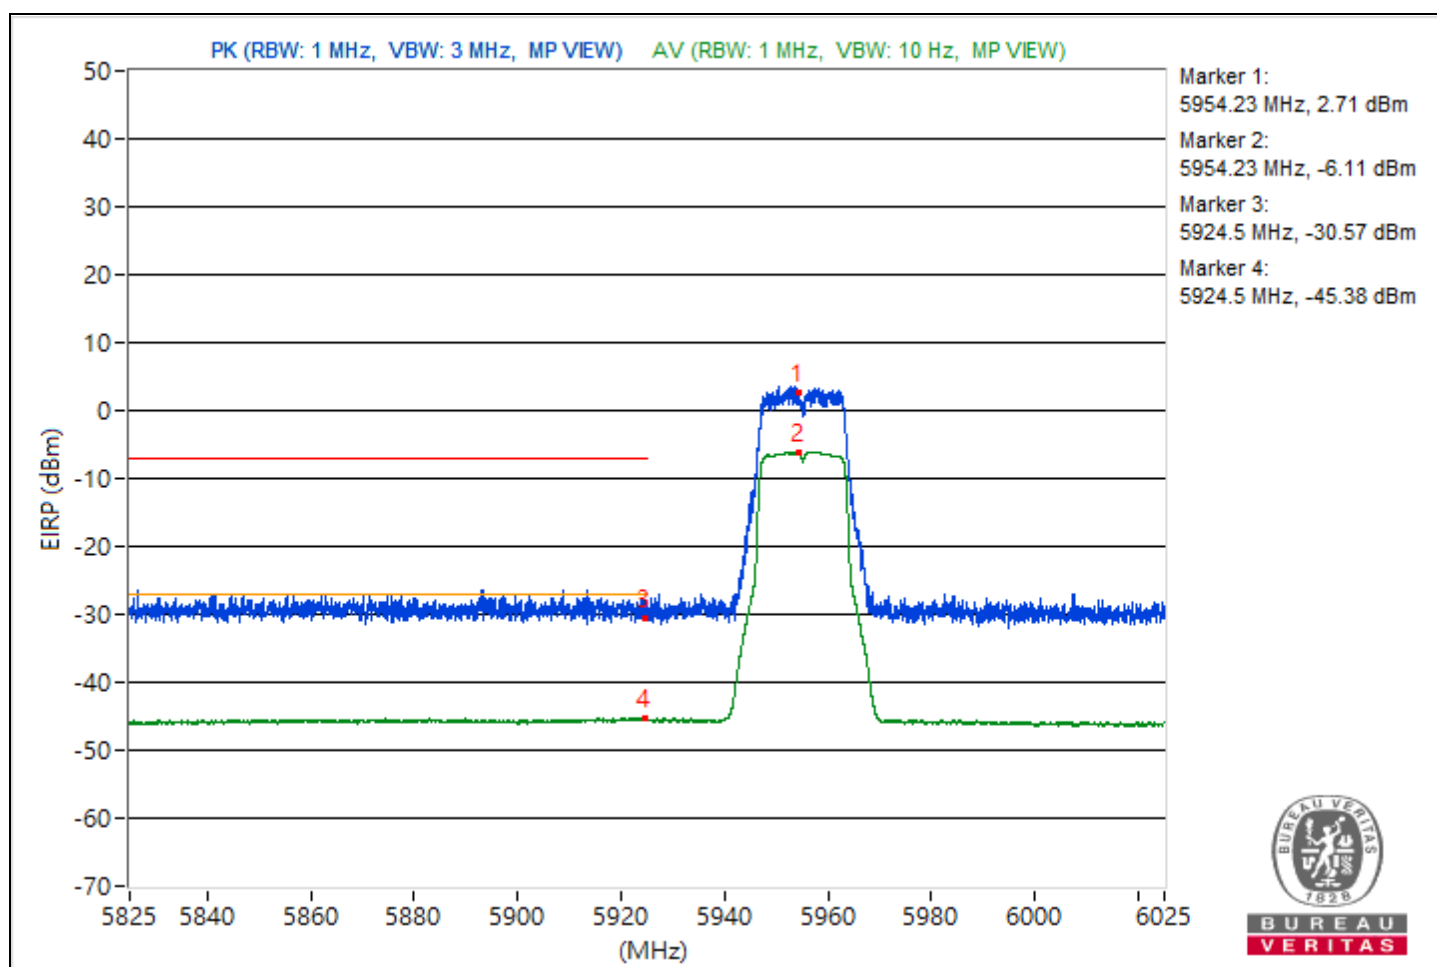


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6856.45	96.61 PK			-10.37	-9.35	8.17	1.35
2	*6856.45	87.95 AV			-19.75	-17.51	8.17	-7.31
3	#7216.93	53.99 PK	88.26	-34.27	-52.28	-52.62	8.17	-41.27
4	#7216.93	41.69 AV	68.26	-26.57	-65.27	-64.28	8.17	-53.57

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

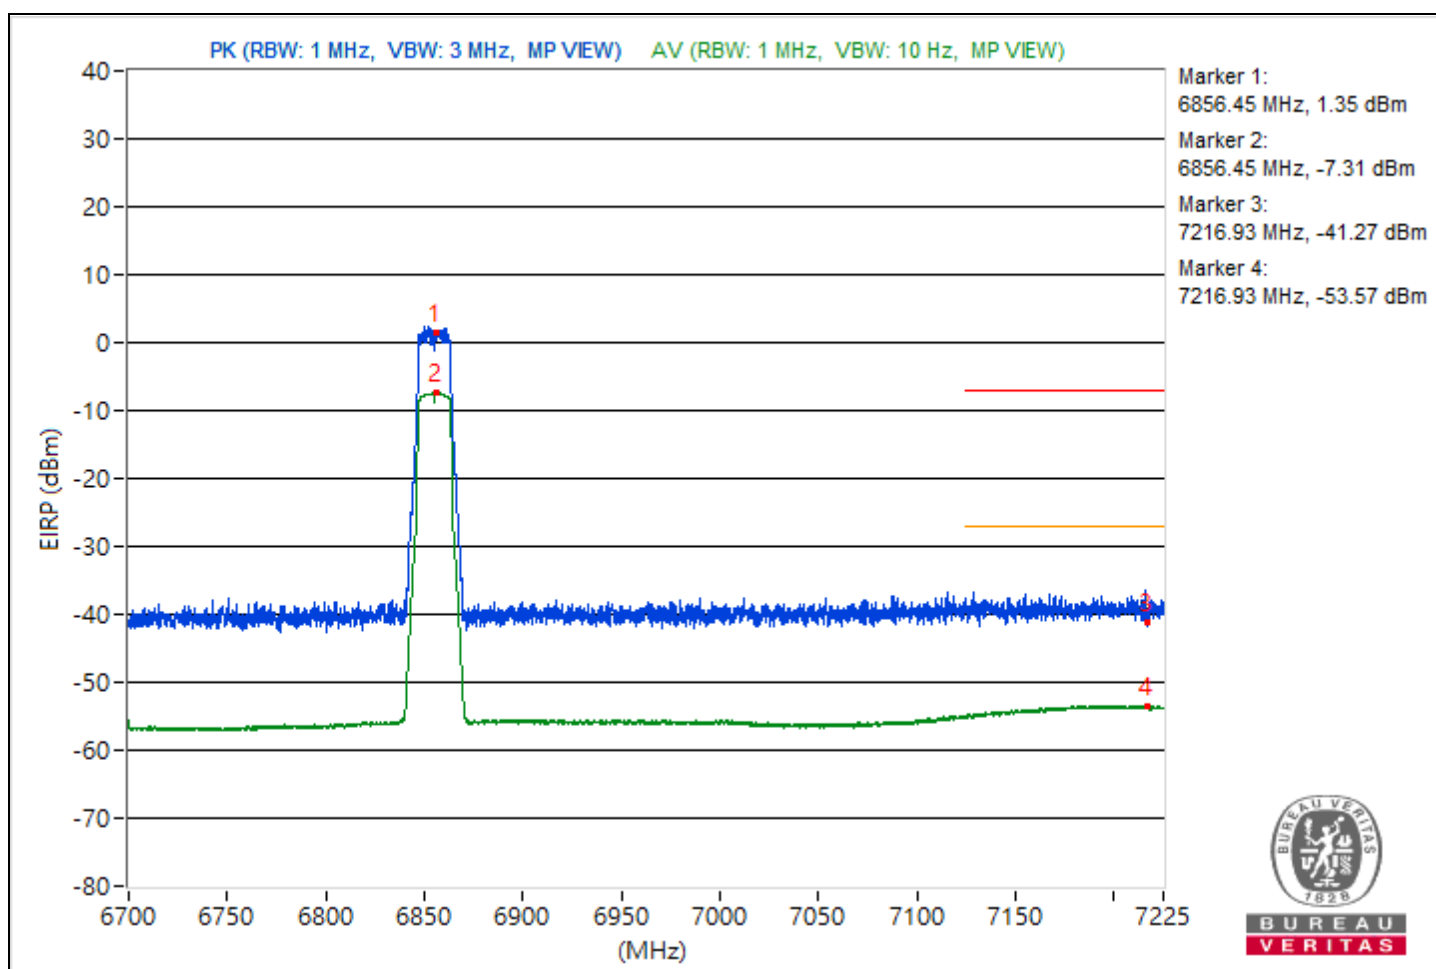


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5943.4	89.17 PK			-18.25	-16.45	8.15	-6.09
2	*5943.4	80.56 AV			-26.25	-25.5	8.15	-14.7
3	#5924.98	77.16 PK	88.26	-11.1	-28.85	-29.72	8.15	-18.1
4	#5924.98	68.1 AV	68.26	-0.16	-38.65	-38	8.15	-27.16

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

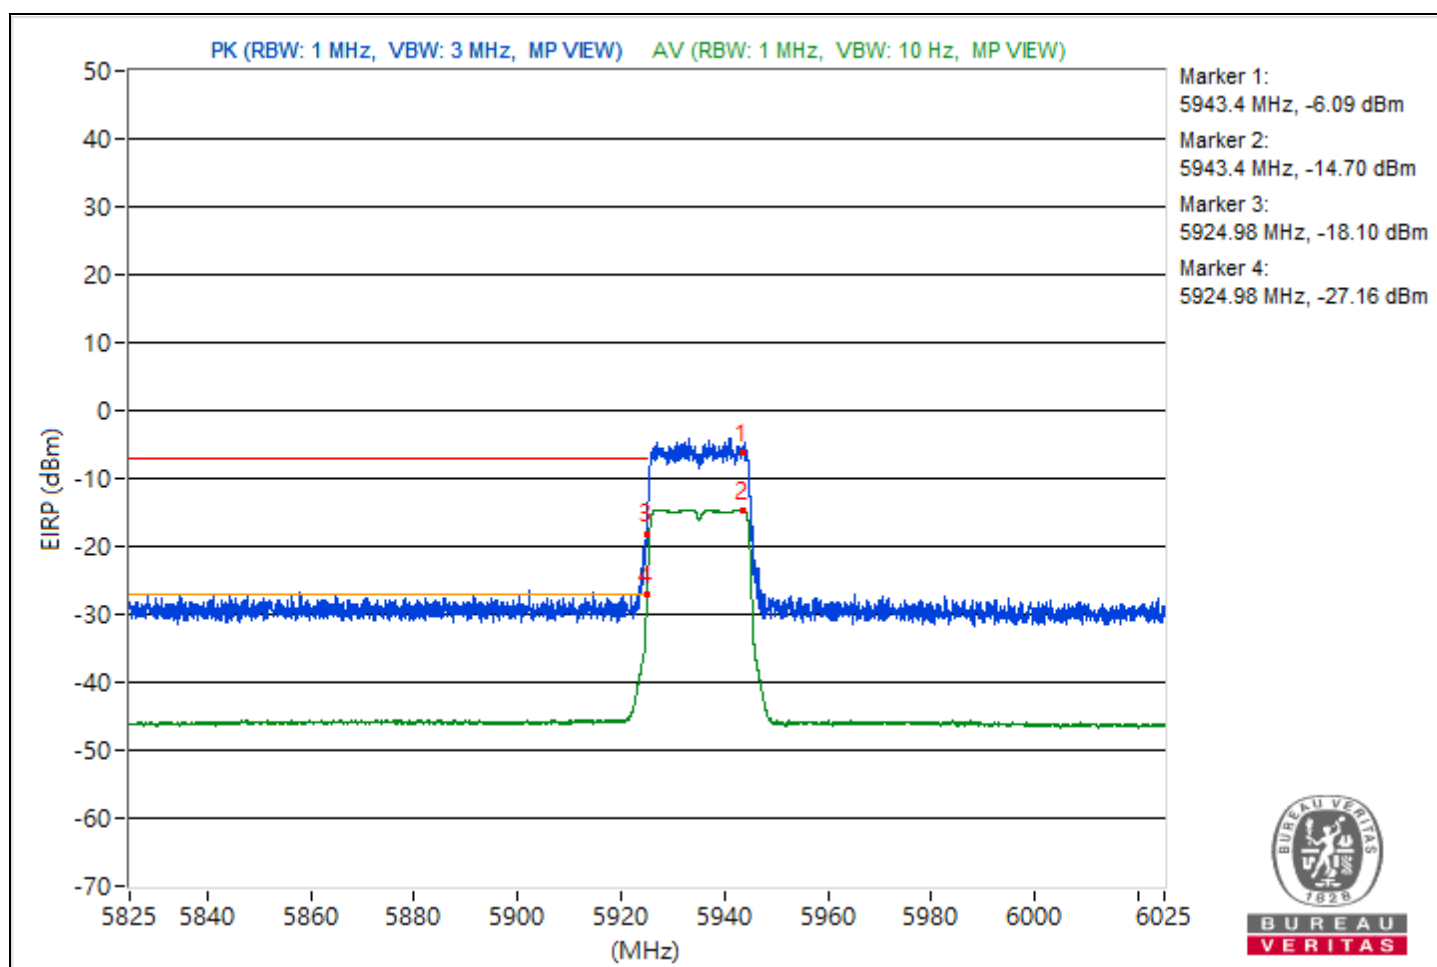


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5956.65	96.75 PK			-9.9	-9.45	8.15	1.49
2	*5956.65	89.09 AV			-17.81	-16.89	8.15	-6.17
3	#5825	66.81 PK	88.26	-21.45	-39.53	-39.69	8.15	-28.45
4	#5825	52.05 AV	68.26	-16.21	-57.31	-52.64	8.15	-43.21

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

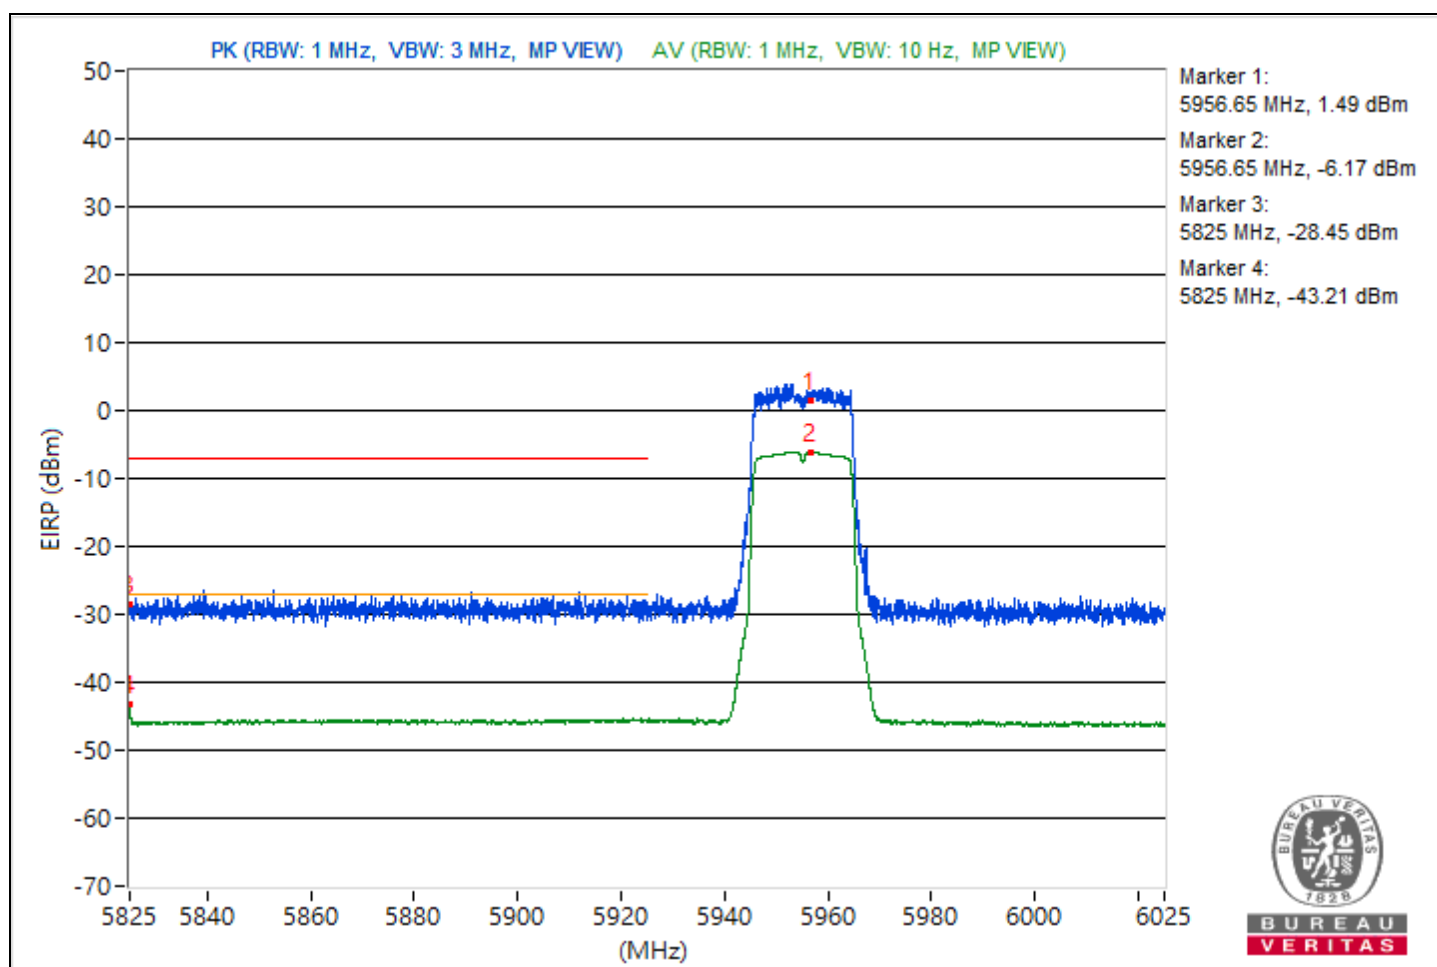


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6856.91	96.01 PK			-11.51	-9.57	8.17	0.75
2	*6856.91	88.05 AV			-19.65	-17.41	8.17	-7.21
3	#7197.63	55.94 PK	88.26	-32.32	-51.74	-49.54	8.17	-39.32
4	#7197.63	41.85 AV	68.26	-26.41	-64.74	-64.45	8.17	-53.41

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

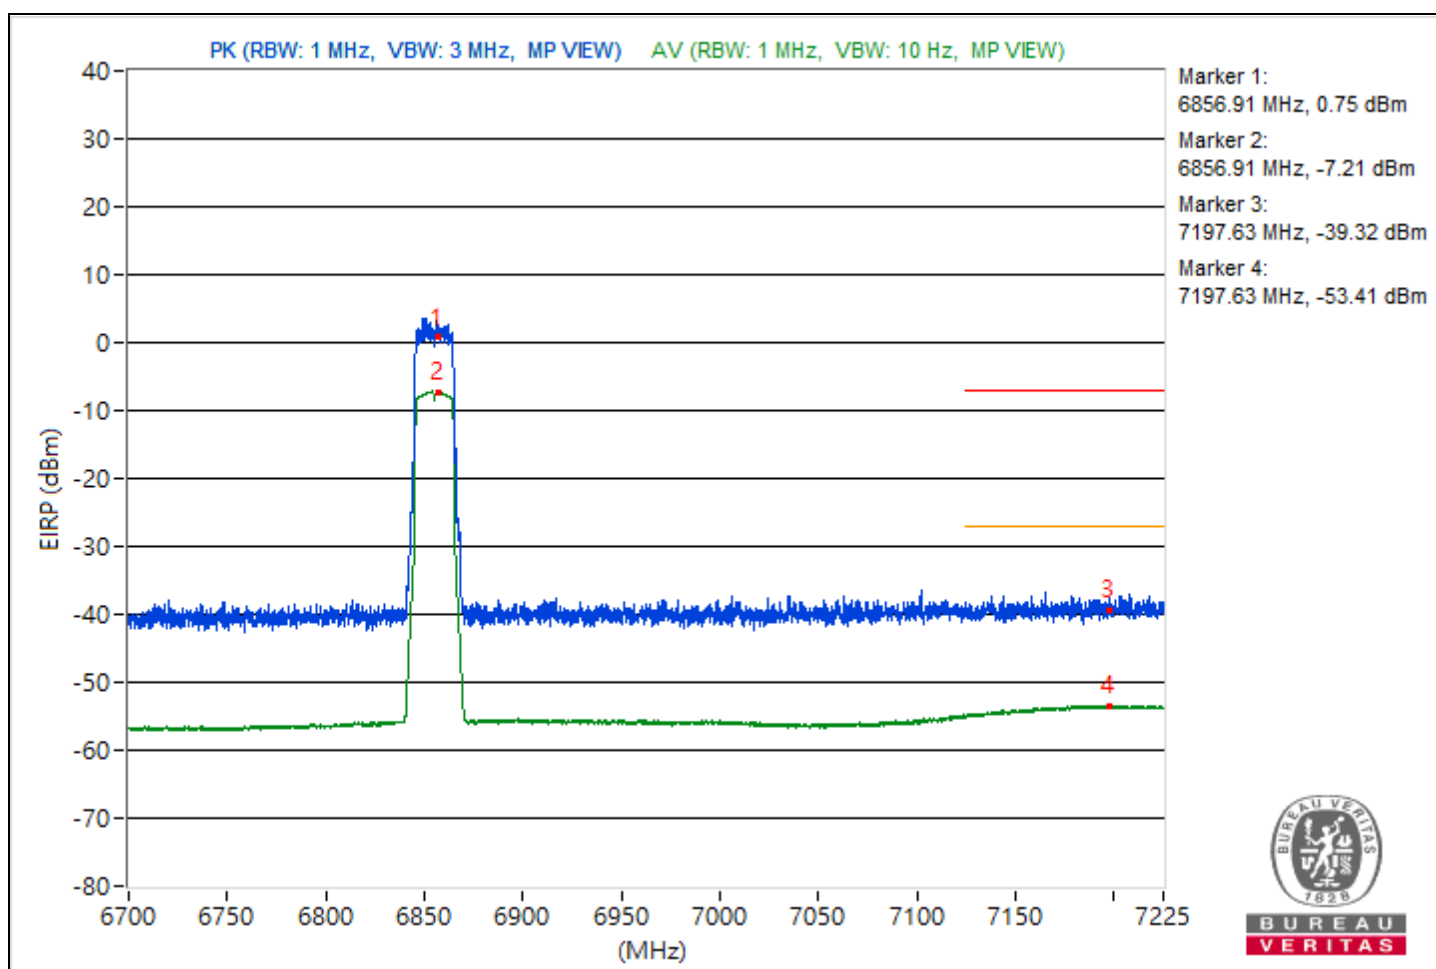


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5963.9	97.05 PK			-10	-8.83	8.15	1.79
2	*5963.9	87.93 AV			-19.17	-17.91	8.15	-7.33
3	#5920.77	65.02 PK	88.26	-23.24	-40.81	-42.08	8.15	-30.24
4	#5920.77	49.96 AV	68.26	-18.3	-56.16	-56.79	8.15	-45.3

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

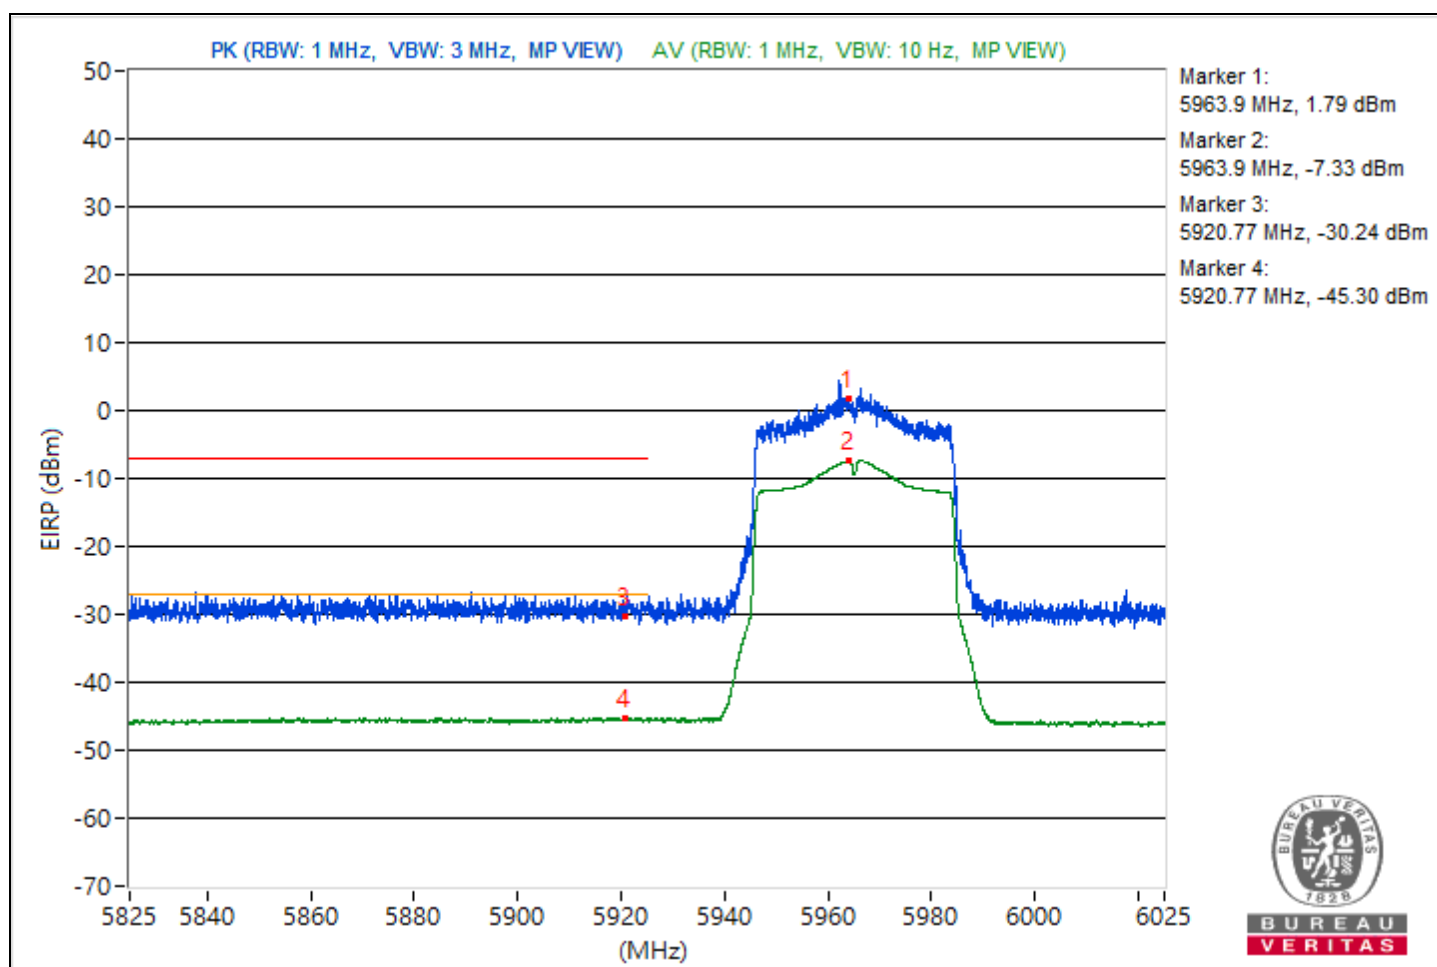


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6844.11	95.95 PK			-11.52	-9.66	8.17	0.69
2	*6844.11	87.79 AV			-20.08	-17.58	8.17	-7.47
3	#7214.3	55.48 PK	88.26	-32.78	-51.88	-50.19	8.17	-39.78
4	#7214.3	41.97 AV	68.26	-26.29	-64.09	-64.88	8.17	-53.29

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

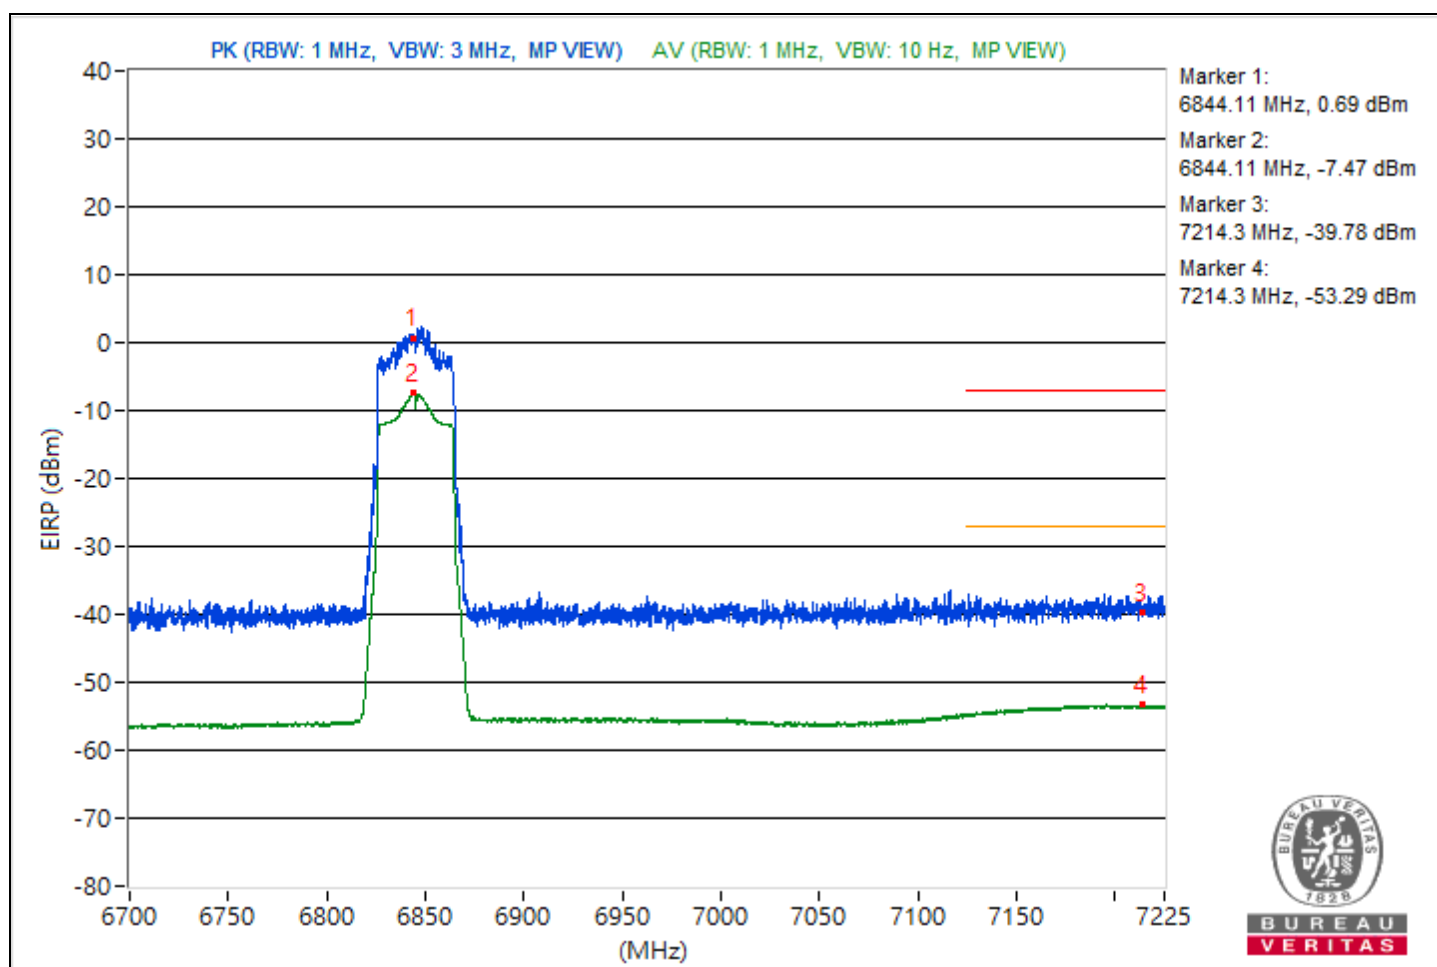


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5986.82	96.8 PK			-10.4	-8.97	8.15	1.54
2	*5986.82	88.31 AV			-18.51	-17.75	8.15	-6.95
3	#5924.75	65.45 PK	88.26	-22.81	-40.98	-40.96	8.15	-29.81
4	#5924.75	50.31 AV	68.26	-17.95	-56.24	-55.99	8.15	-44.95

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

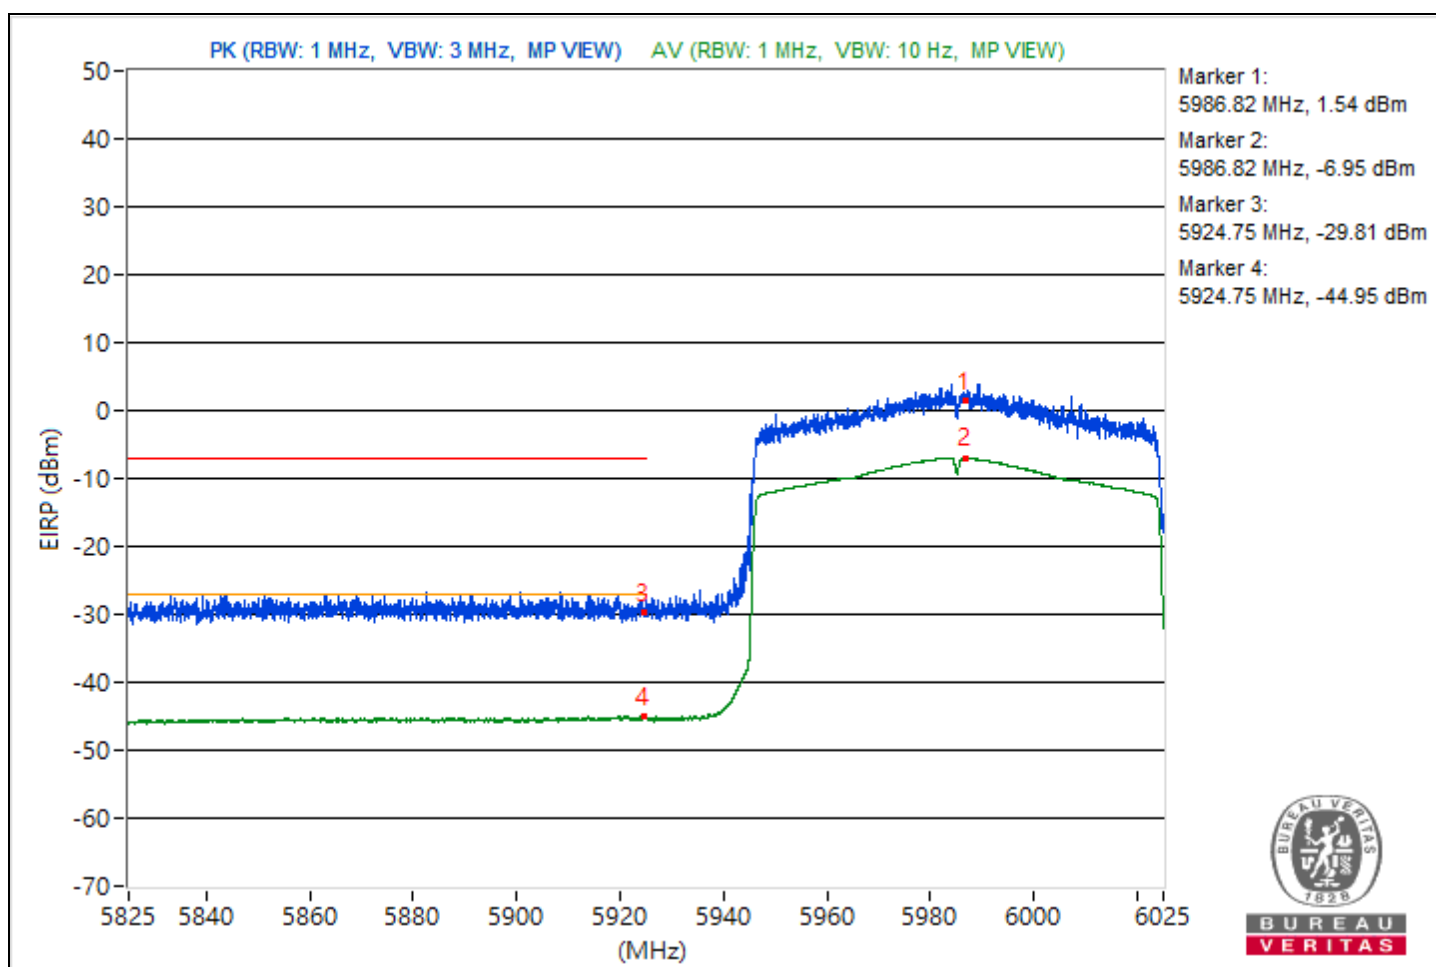


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6787.22	97.23 PK			-10.67	-8.12	8.17	1.97
2	*6787.22	87.76 AV			-19.38	-18.08	8.17	-7.5
3	#7208.2	56.66 PK	88.26	-31.6	-50	-49.57	8.17	-38.6
4	#7208.2	41.95 AV	68.26	-26.31	-64.63	-64.35	8.17	-53.31

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

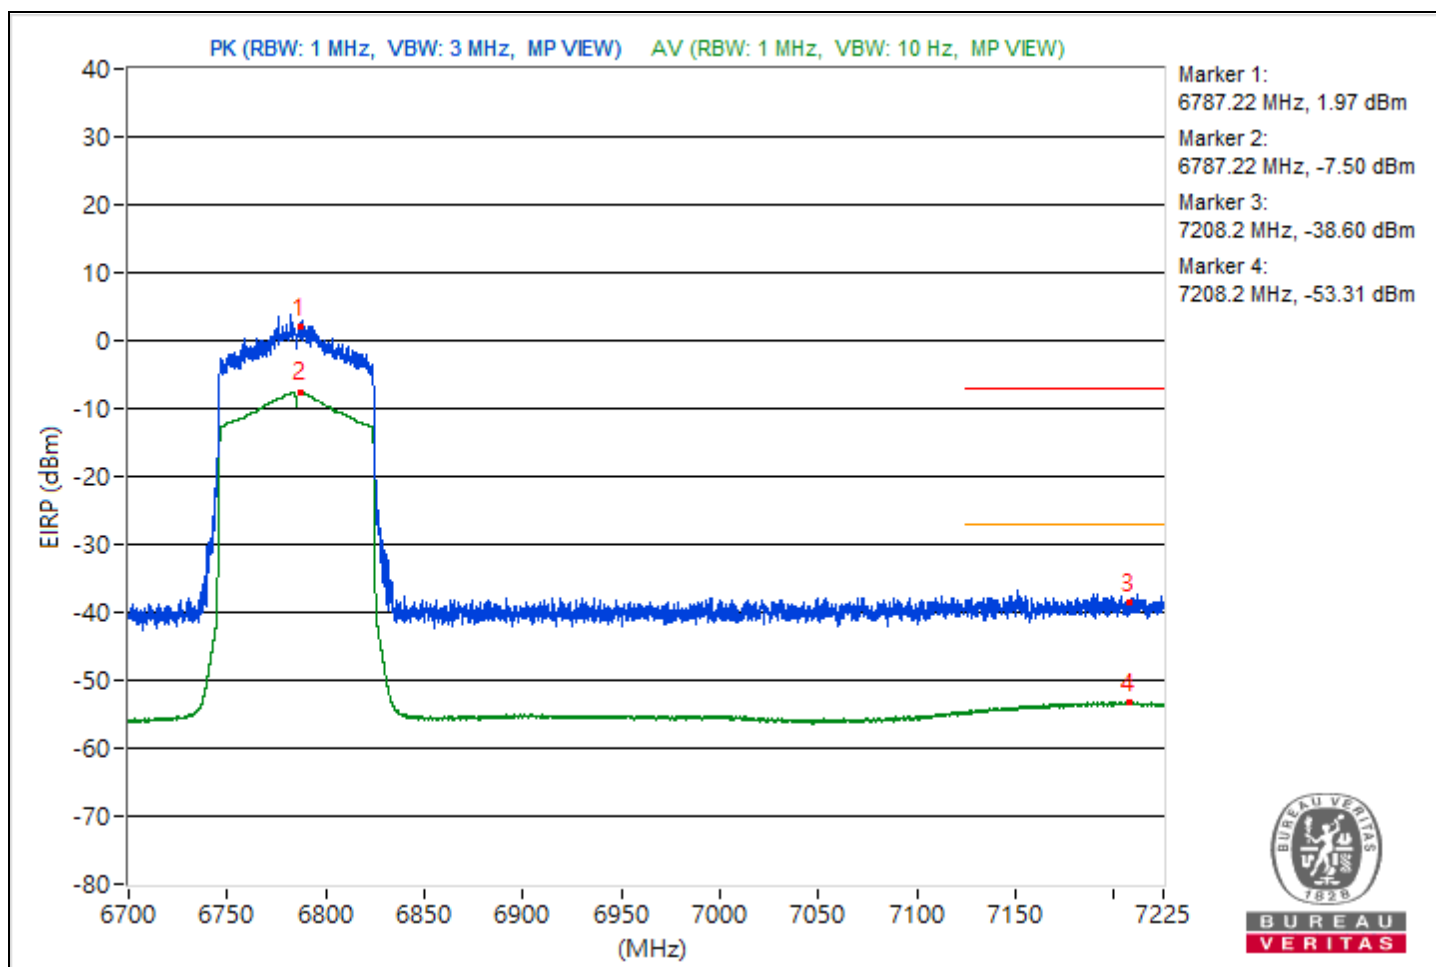


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.62	96.58 PK			-10.27	-9.44	8.15	1.32
2	*6022.62	88.27 AV			-18.2	-18.09	8.15	-6.99
3	#5922.93	65.1 PK	88.26	-23.16	-41.84	-40.86	8.15	-30.16
4	#5922.93	50.15 AV	68.26	-18.11	-56.24	-56.29	8.15	-45.11

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

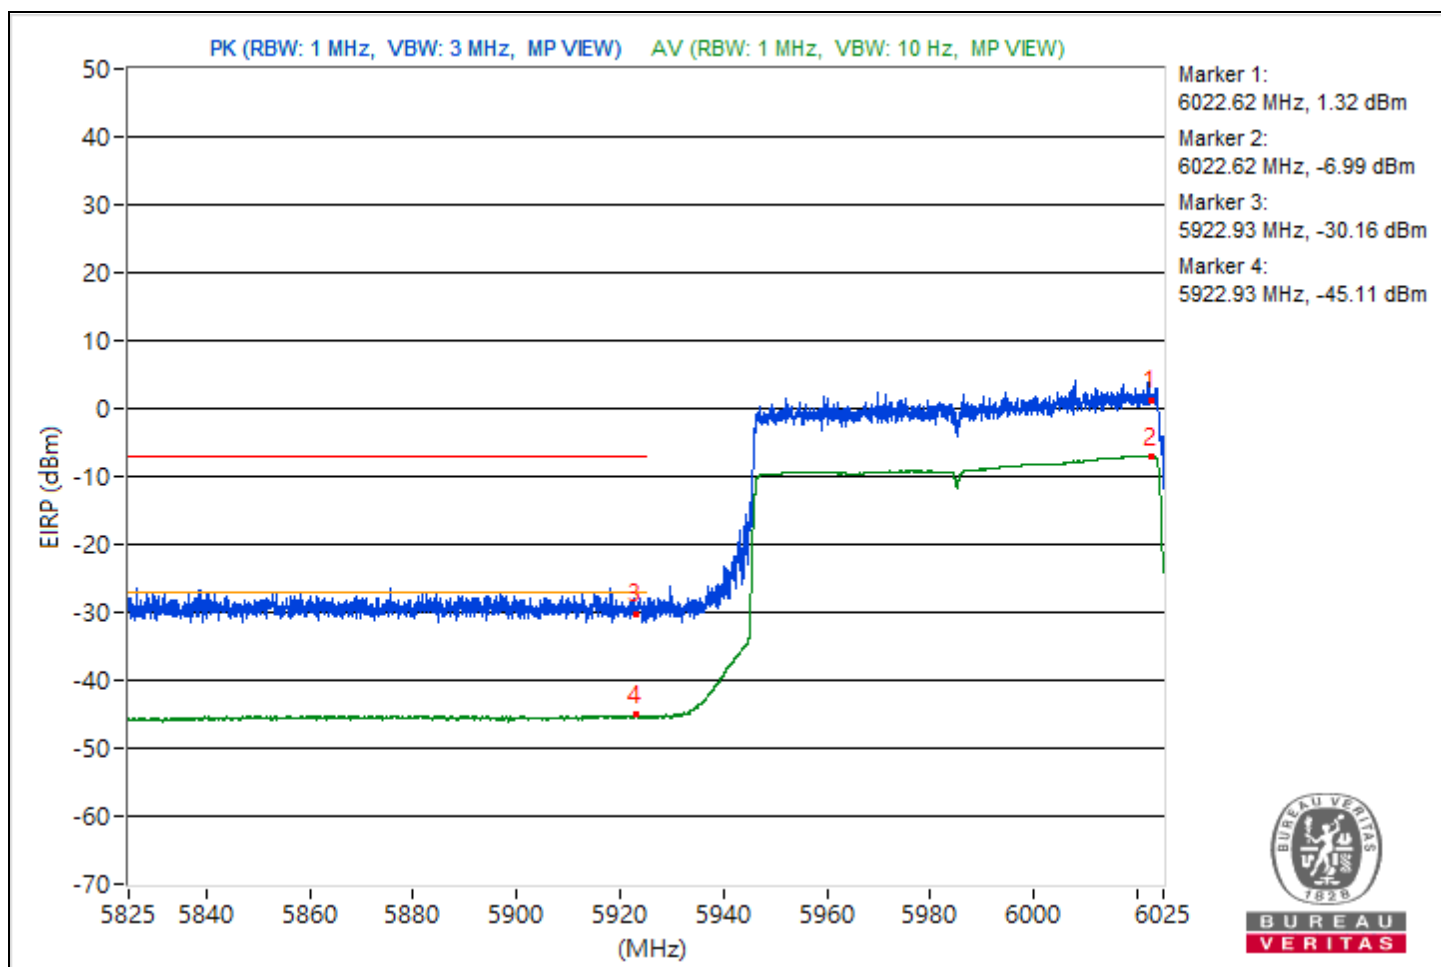


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6702.49	94.27 PK			-11.97	-12.39	8.17	-0.99
2	*6702.49	86.11 AV			-20.37	-20.29	8.17	-9.15
3	#7189.23	56.44 PK	88.26	-31.82	-50.12	-49.88	8.17	-38.82
4	#7189.23	42.06 AV	68.26	-26.2	-64.05	-64.75	8.17	-53.2

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

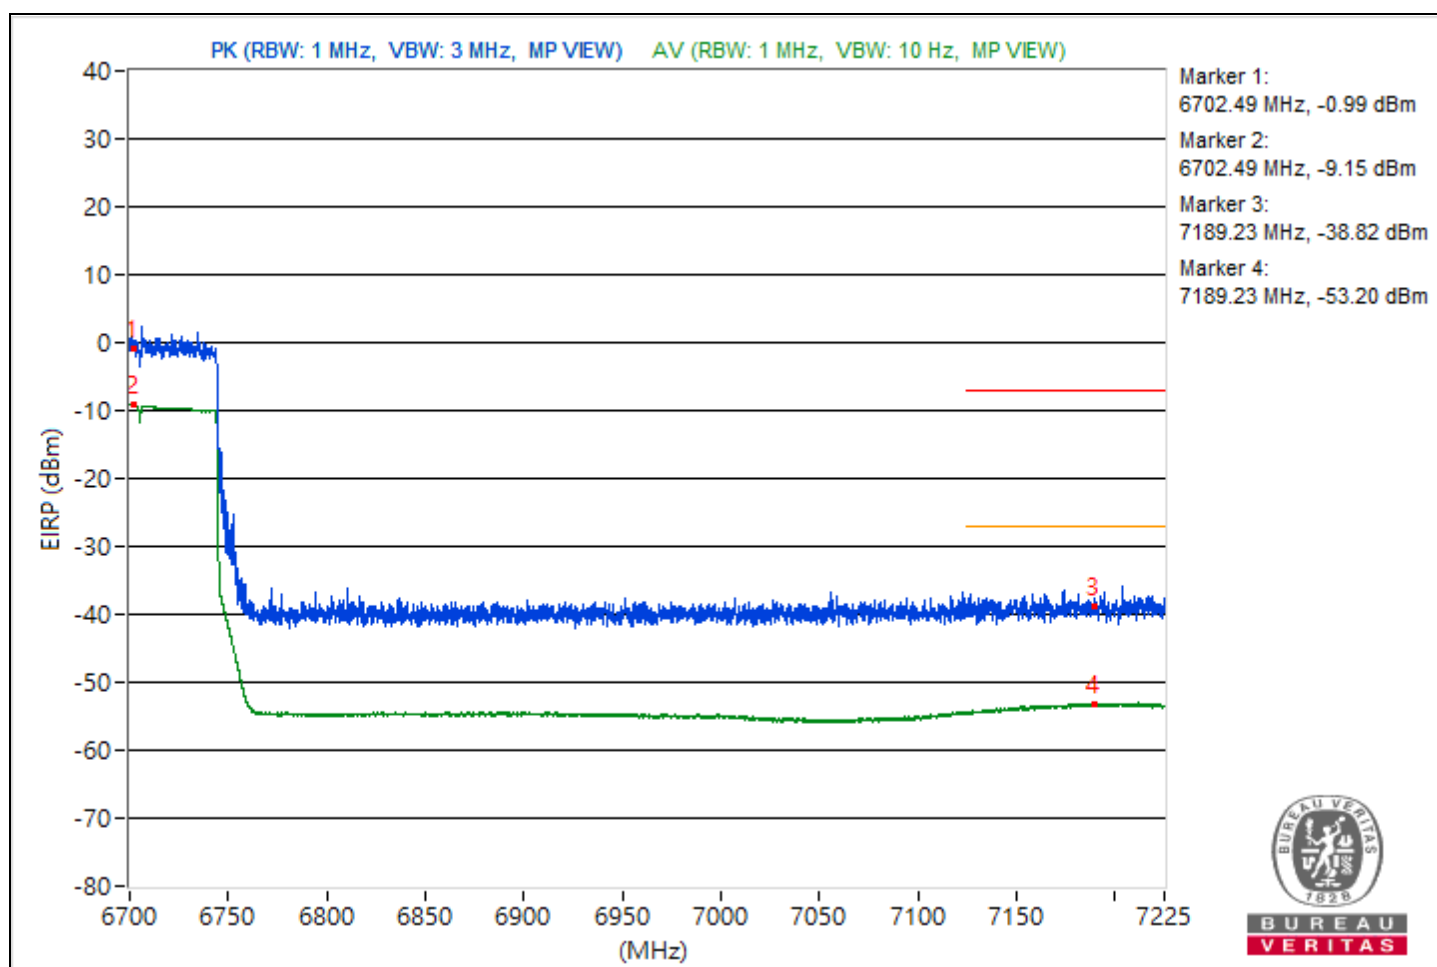


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6020.18	91.54 PK			-13.79	-16.33	8.15	-3.72
2	*6020.18	84.01 AV			-22.11	-22.73	8.15	-11.25
3	#5871.32	65.67 PK	88.26	-22.59	-41.35	-40.23	8.15	-29.59
4	#5871.32	55.25 AV	68.26	-13.01	-52.86	-49.96	8.15	-40.01

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

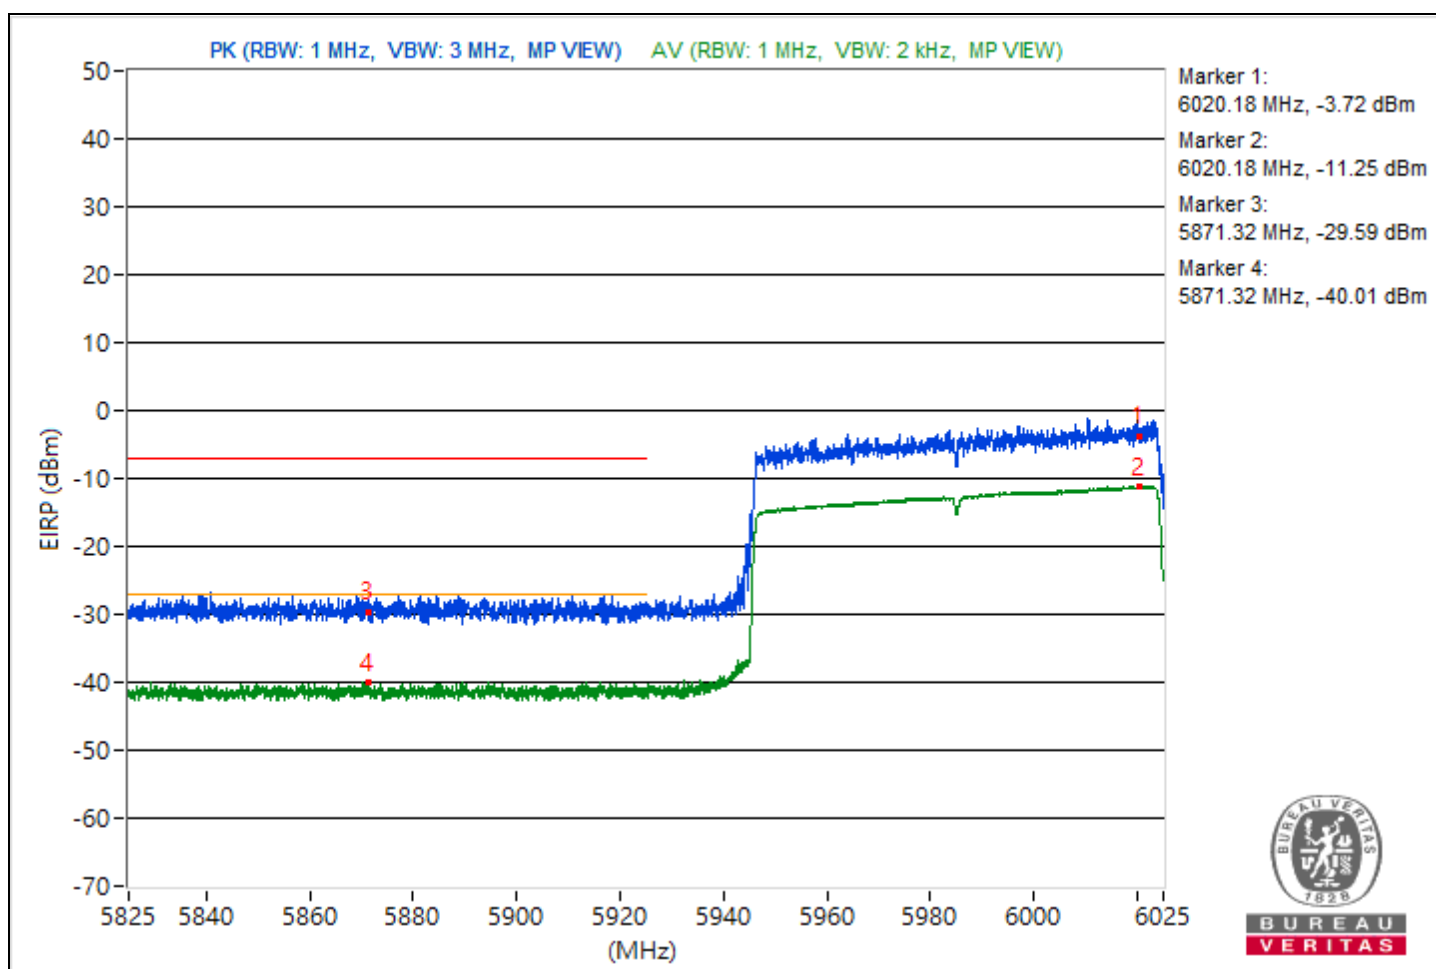


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5926.85	94 PK			-12.32	-12.53	8.15	-1.26
2	*5926.85	83.92 AV			-22.41	-22.59	8.15	-11.34
3	#5924.98	81.95 PK	88.26	-6.31	-23.77	-25.3	8.15	-13.31
4	#5924.98	68.15 AV	68.26	-0.11	-38.3	-38.24	8.15	-27.11

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

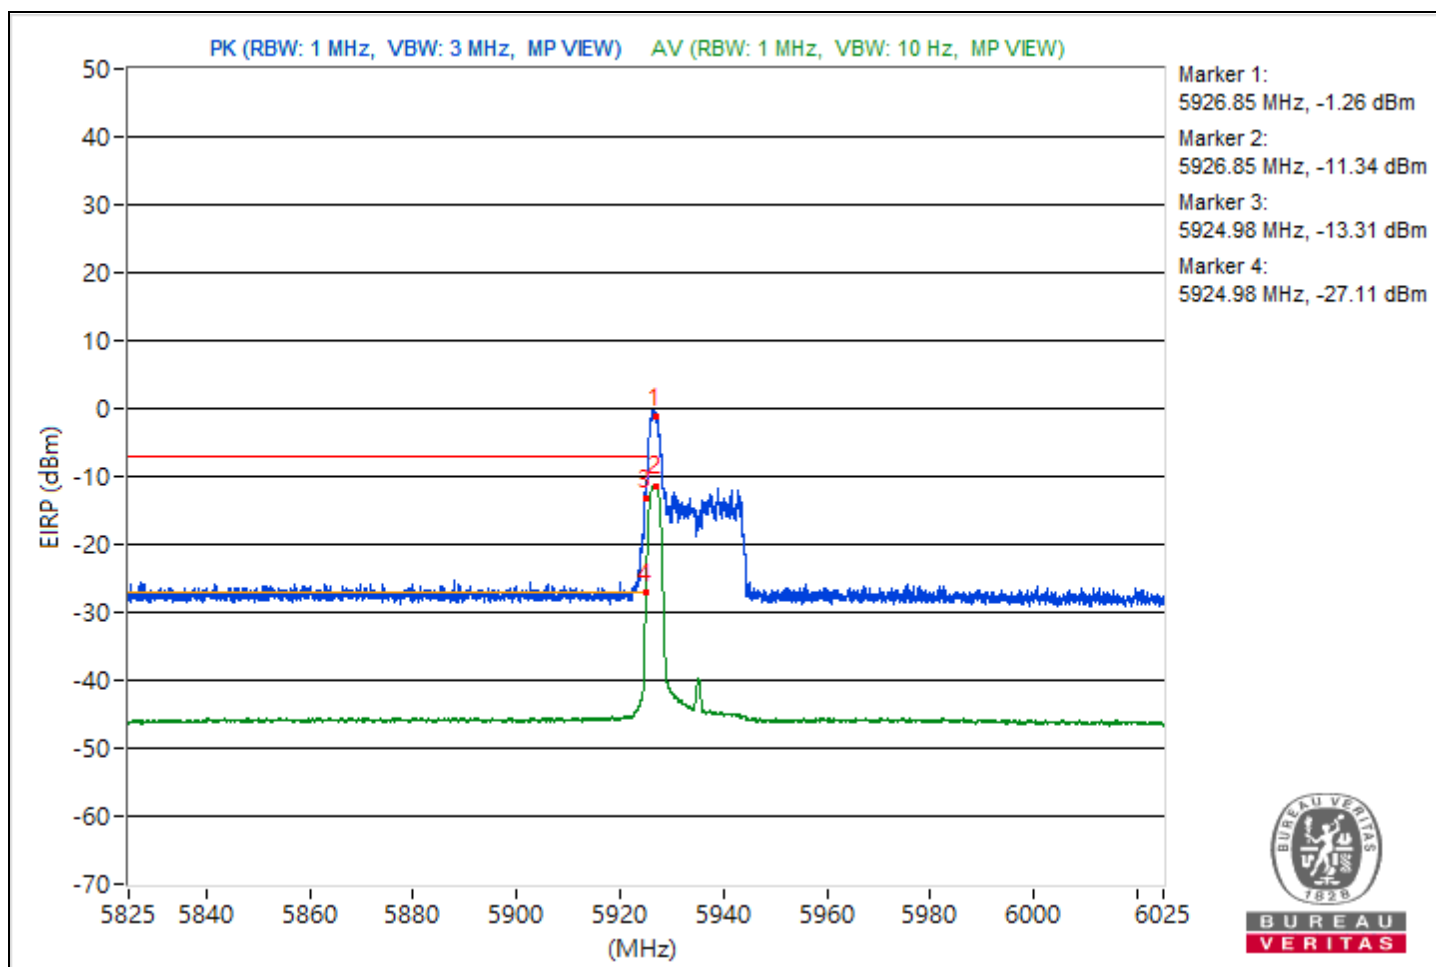


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.73	98.62 PK			-7.56	-8.05	8.15	3.36
2	*5946.73	88.32 AV			-18.31	-17.91	8.15	-6.94
3	#5825	67.57 PK	88.26	-20.69	-38.97	-38.74	8.15	-27.69
4	#5825	53.24 AV	68.26	-15.02	-57.72	-51.01	8.15	-42.02

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

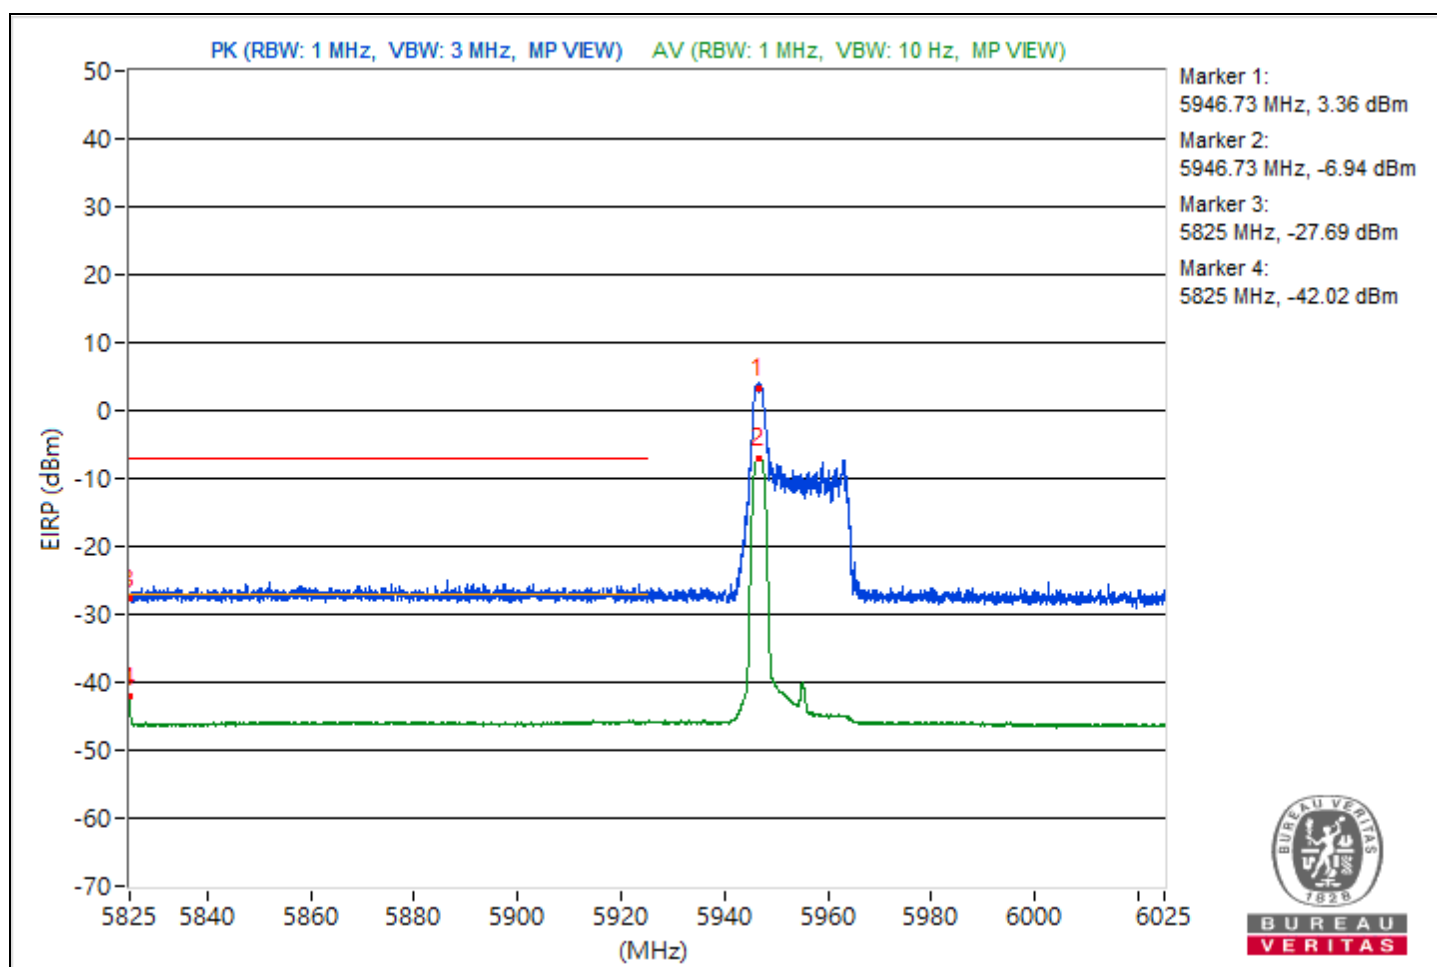


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6863.54	96.99 PK			-10.28	-8.75	8.17	1.73
2	*6863.54	87.05 AV			-20.37	-18.58	8.17	-8.21
3	#7200.13	57.59 PK	88.26	-30.67	-48.8	-48.91	8.17	-37.67
4	#7200.13	41.63 AV	68.26	-26.63	-65	-64.63	8.17	-53.63

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

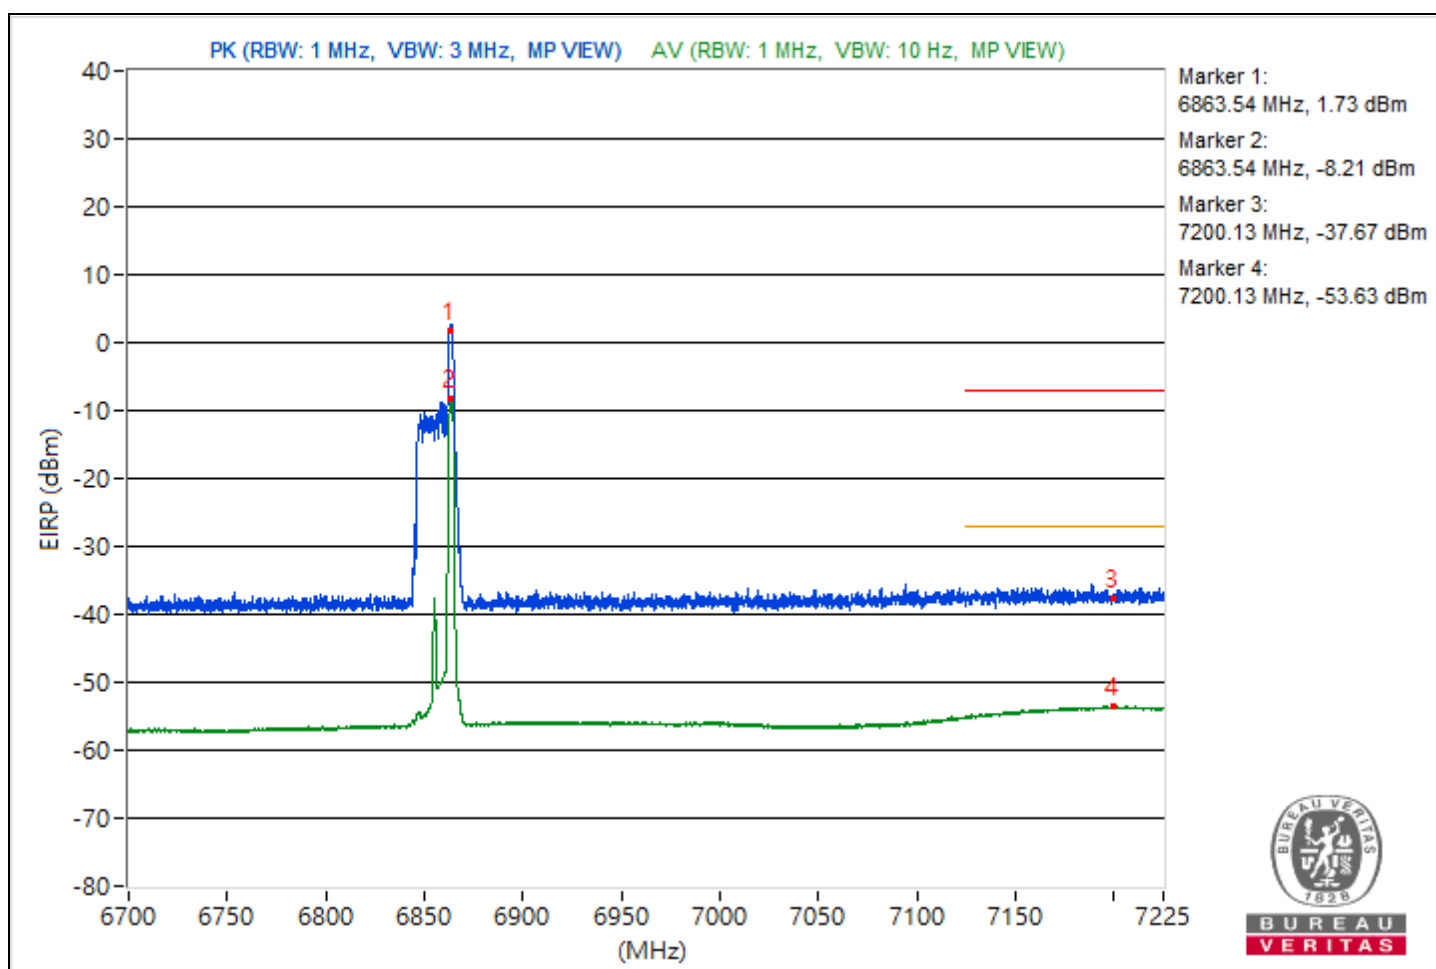


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5927.57	94.11 PK			-13.05	-11.67	8.15	-1.15
2	*5927.57	84 AV			-22.57	-22.29	8.15	-11.26
3	#5924.98	82.03 PK	88.26	-6.23	-25.18	-23.73	8.15	-13.23
4	#5924.98	68.17 AV	68.26	-0.09	-38.41	-38.09	8.15	-27.09

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

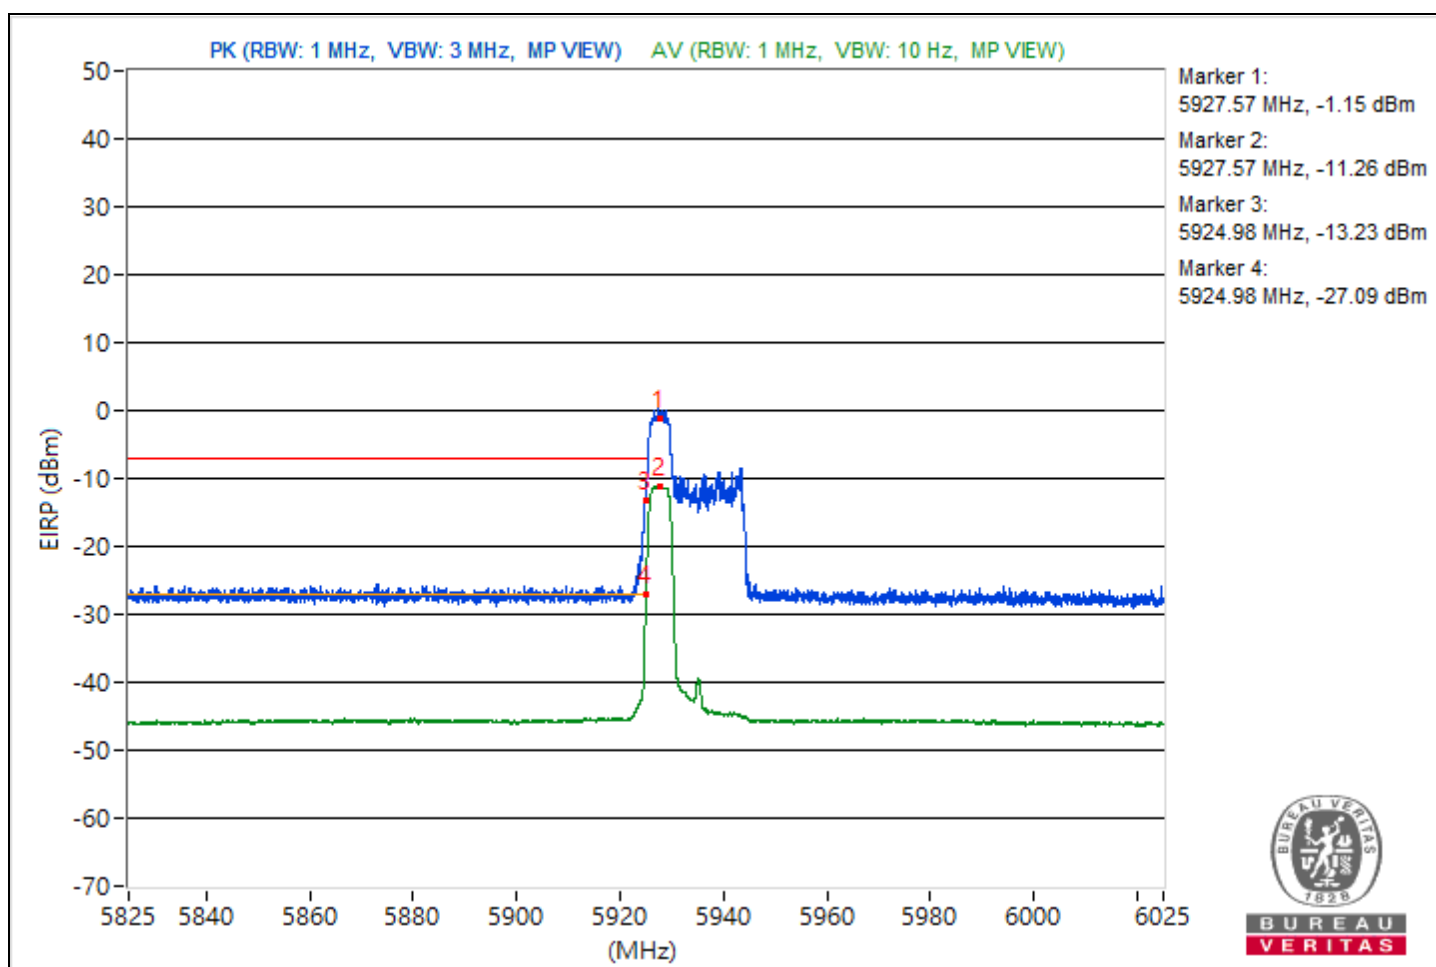


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5947.8	99.24 PK			-7.96	-6.51	8.15	3.98
2	*5947.8	88.36 AV			-18.25	-17.88	8.15	-6.9
3	#5825	66.95 PK	88.26	-21.31	-39.6	-39.34	8.15	-28.31
4	#5825	52.1 AV	68.26	-16.16	-57.7	-52.44	8.15	-43.16

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

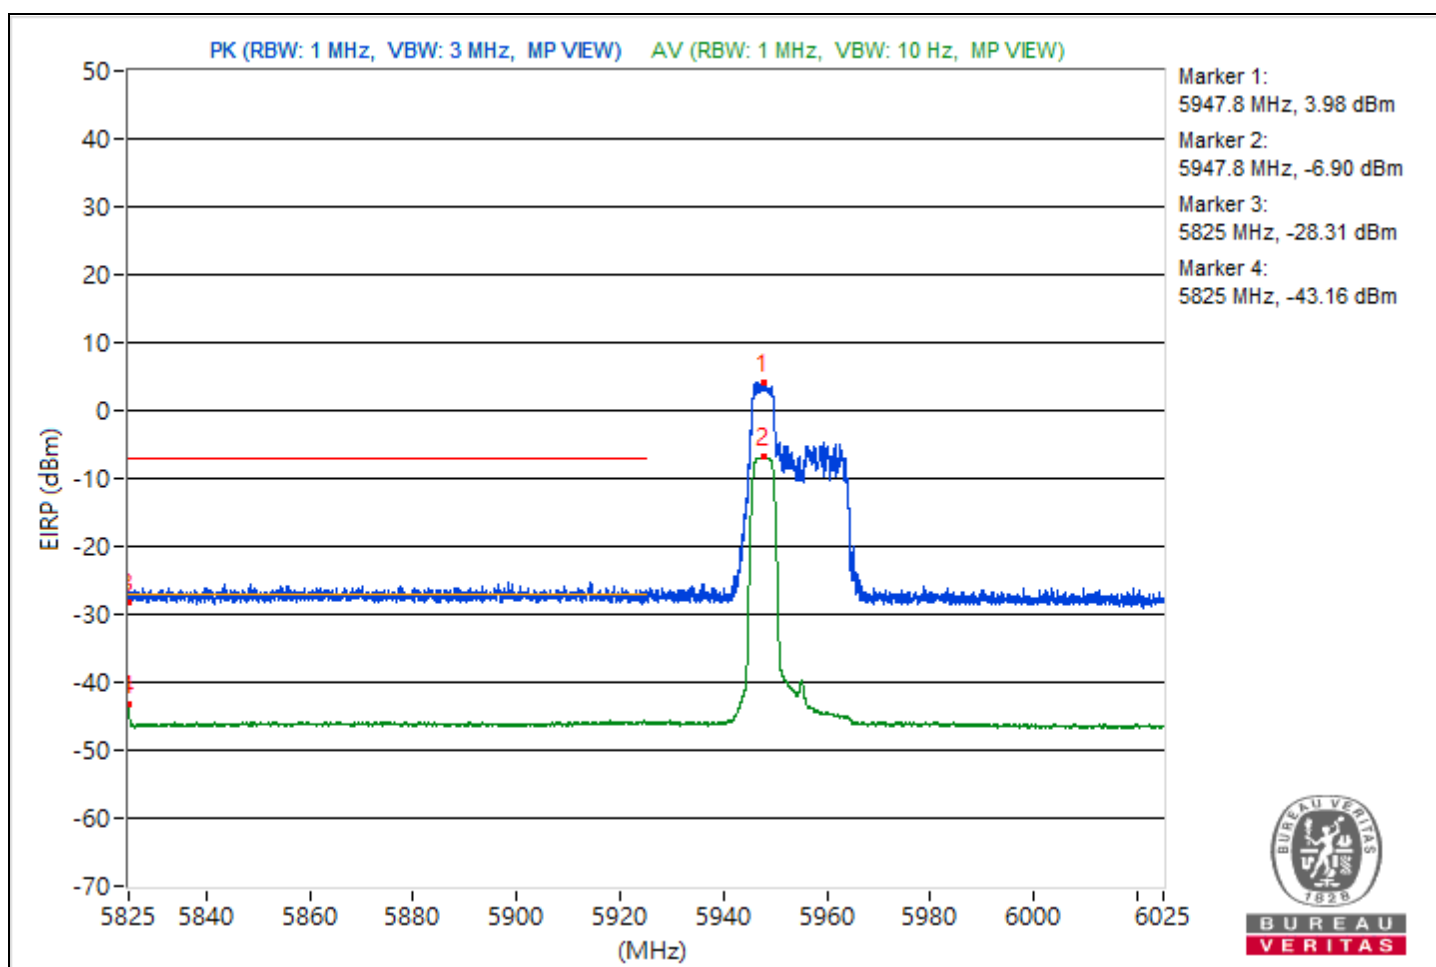


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6861.7	97.89 PK			-9.76	-7.6	8.17	2.63
2	*6861.7	87.3 AV			-20.23	-18.26	8.17	-7.96
3	#7192.91	57.32 PK	88.26	-30.94	-48.86	-49.4	8.17	-37.94
4	#7192.91	41.7 AV	68.26	-26.56	-64.8	-64.68	8.17	-53.56

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

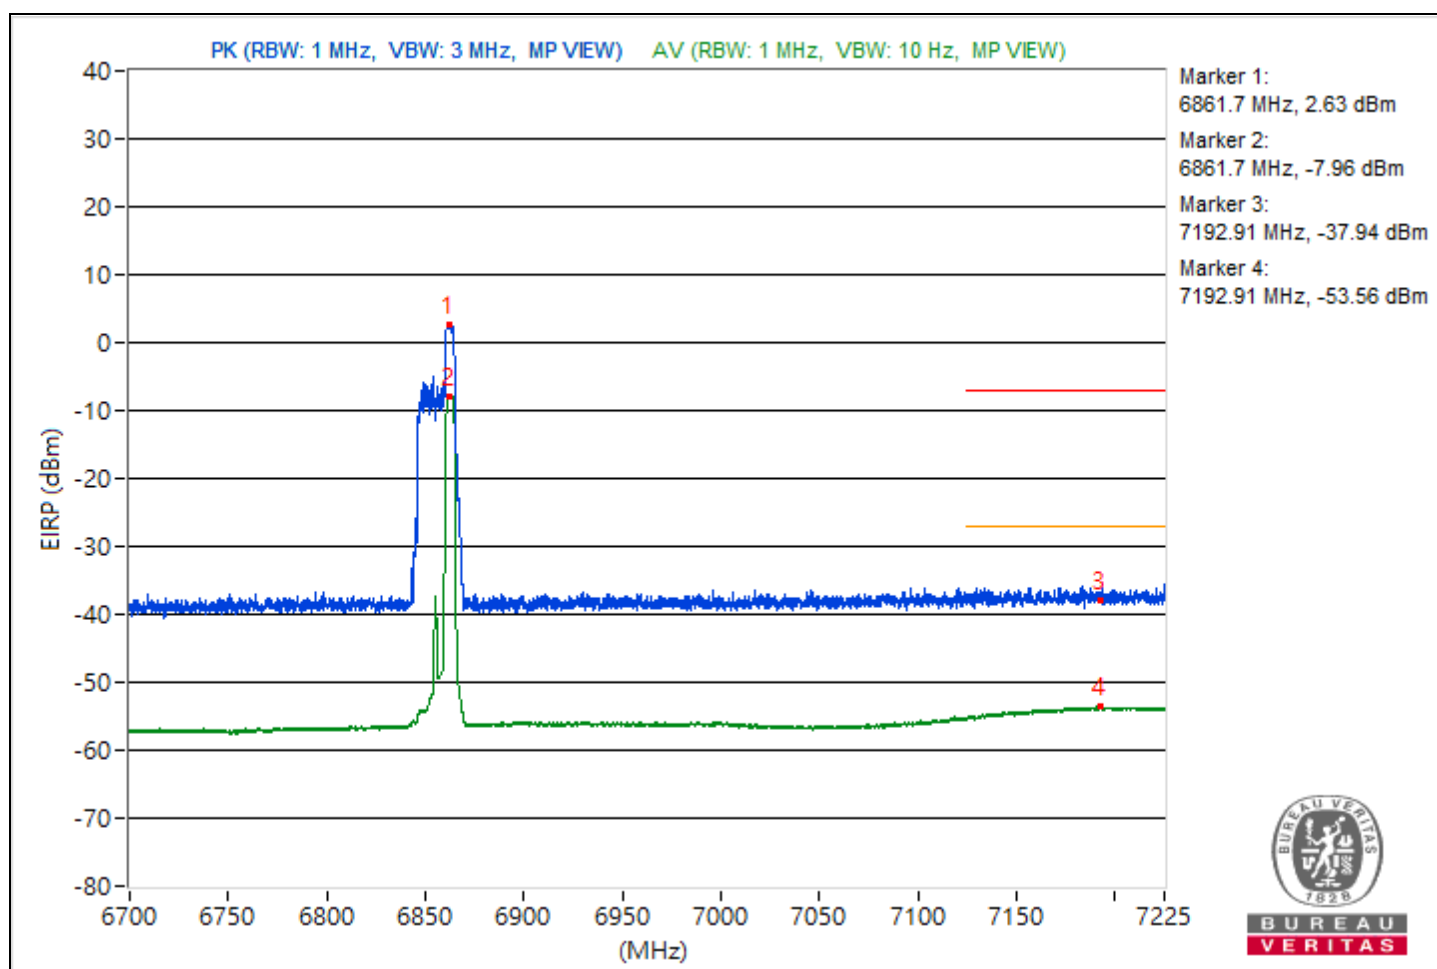


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5926.7	93.1 PK			-14.09	-12.67	8.15	-2.16
2	*5926.7	81.73 AV			-24.7	-24.68	8.15	-13.53
3	#5924.98	81.66 PK	88.26	-6.6	-23.59	-26.37	8.15	-13.6
4	#5924.98	68.2 AV	68.26	-0.06	-38.26	-38.18	8.15	-27.06

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

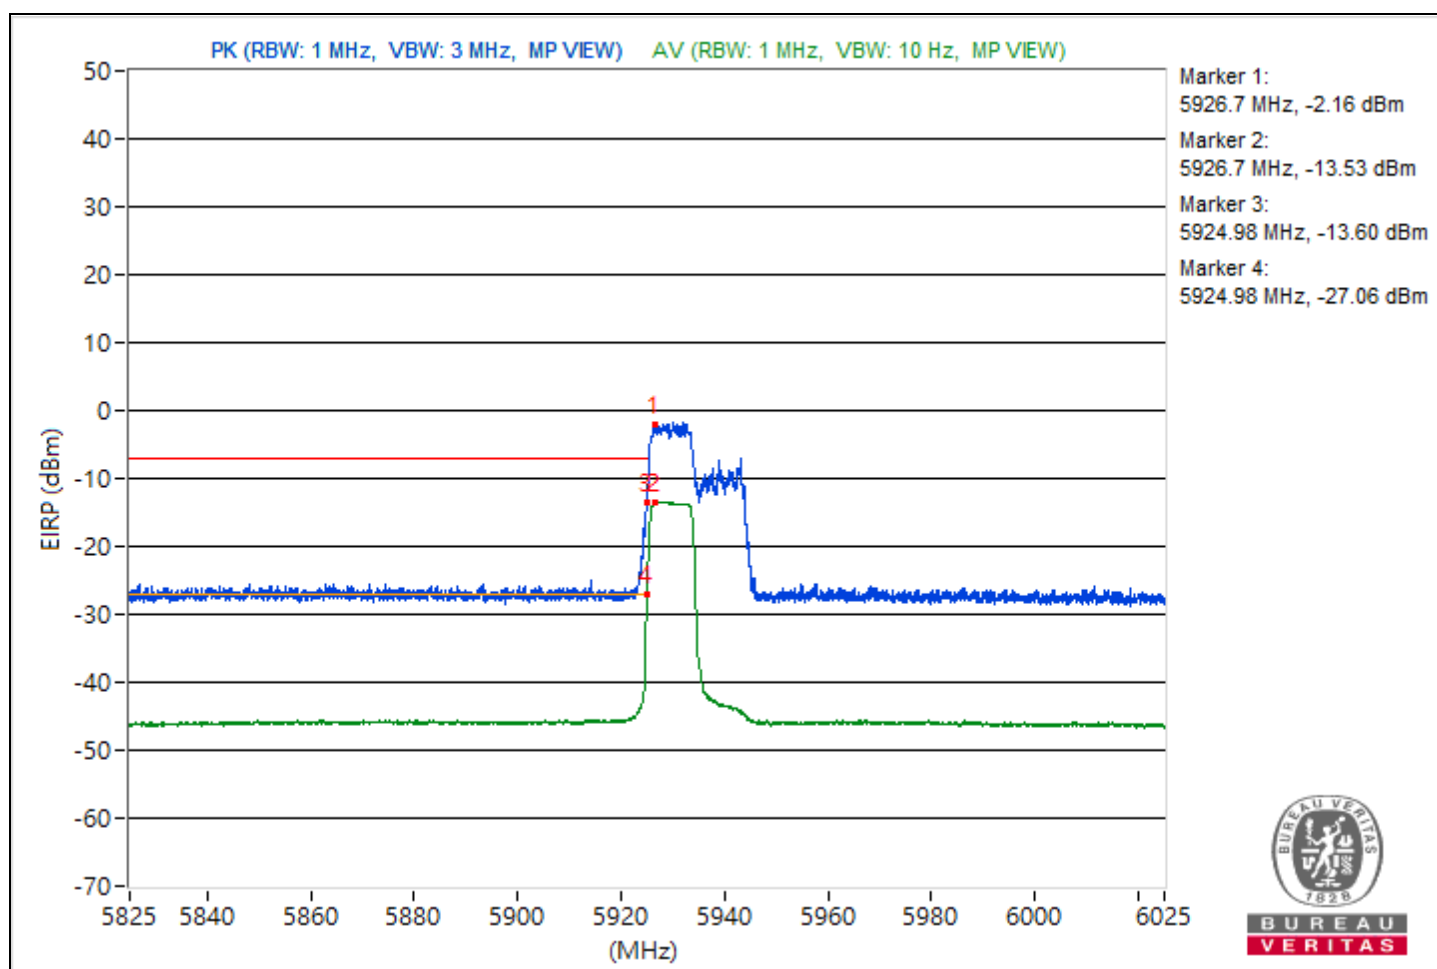


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.68	99.29 PK			-8.63	-6.02	8.15	4.03
2	*5946.68	88.79 AV			-17.74	-17.52	8.15	-6.47
3	#5918.95	67.62 PK	88.26	-20.64	-39.87	-37.94	8.15	-27.64
4	#5918.95	49.73 AV	68.26	-18.53	-56.49	-56.9	8.15	-45.53

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

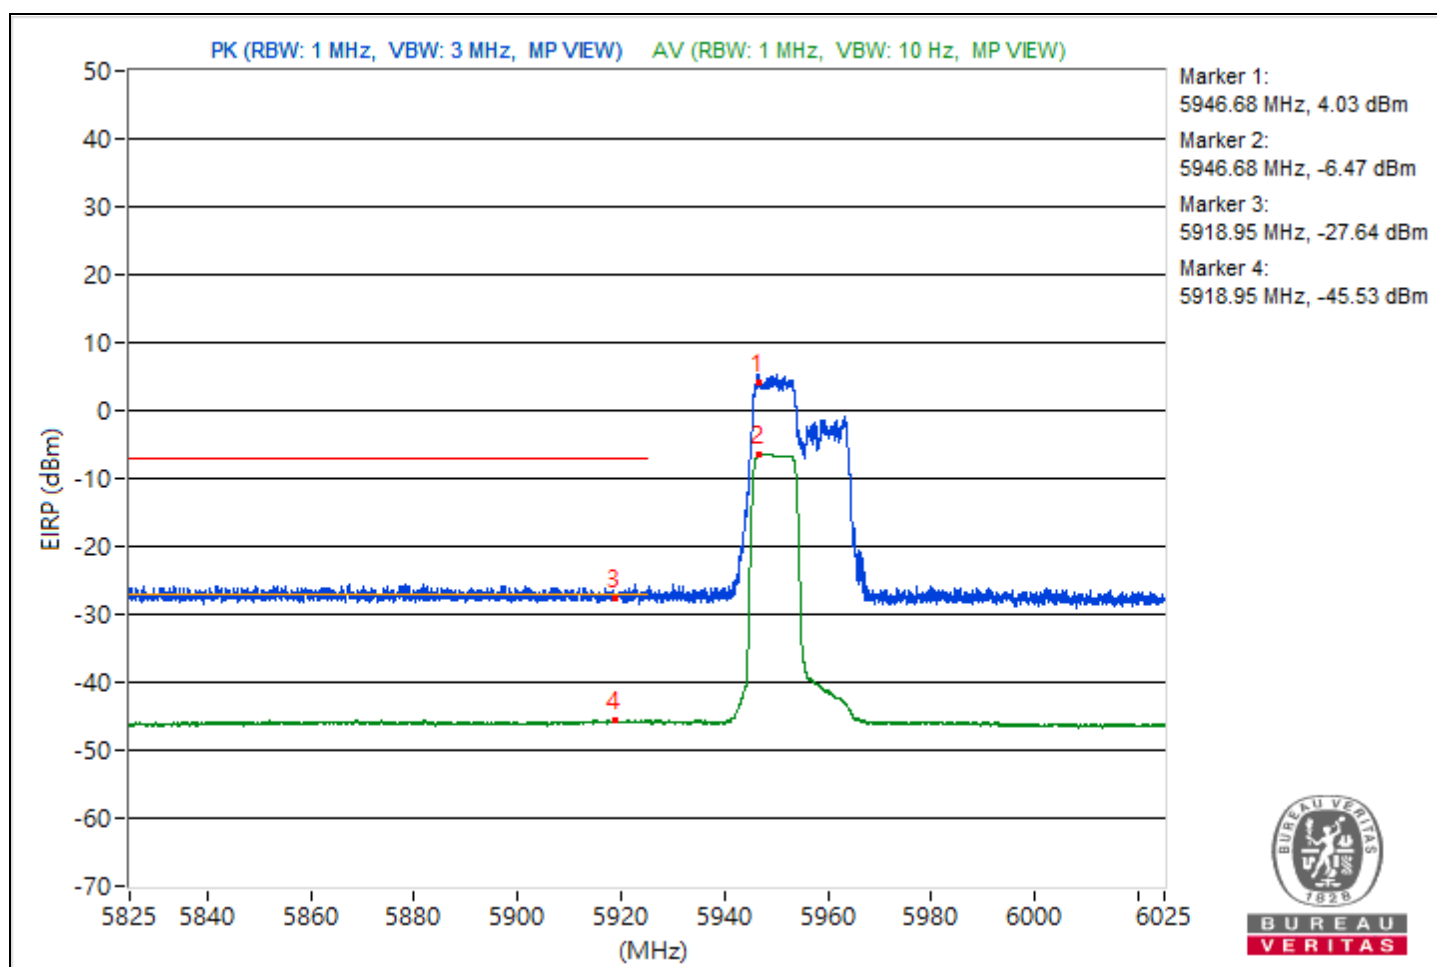


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6857.7	99.39 PK			-7.88	-6.36	8.17	4.13
2	*6857.7	87.73 AV			-19.74	-17.87	8.17	-7.53
3	#7194.94	56.63 PK	88.26	-31.63	-49.85	-49.78	8.17	-38.63
4	#7194.94	41.79 AV	68.26	-26.47	-64.5	-64.8	8.17	-53.47

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

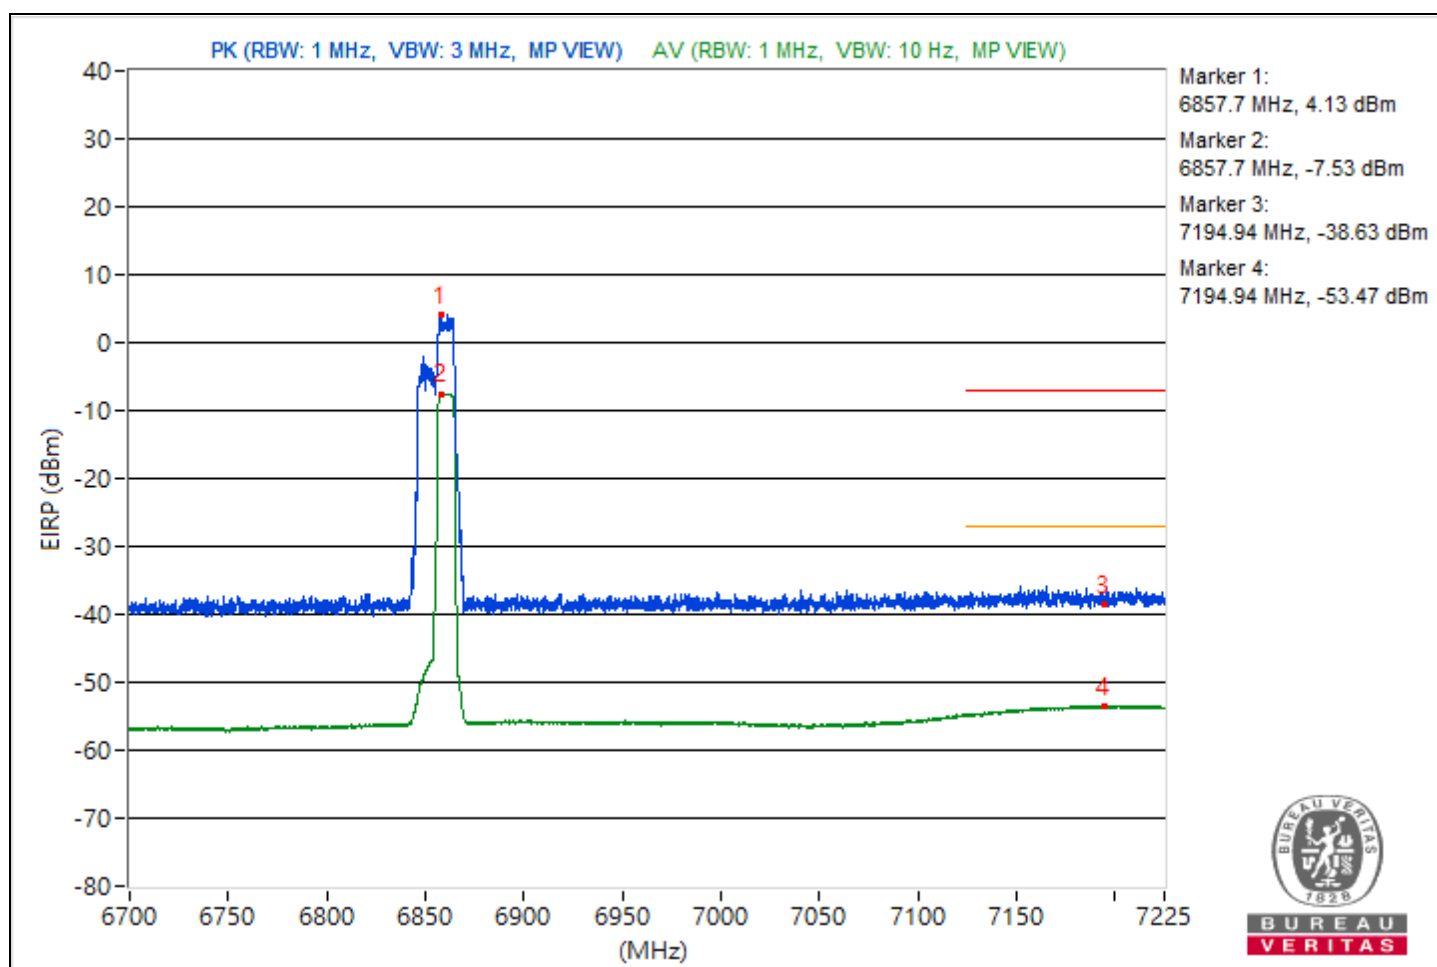


RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5983.02	99.61 PK			-6.32	-7.35	8.15	4.35
2	*5983.02	87.3 AV			-19.51	-18.77	8.15	-7.96
3	#5922.27	67.81 PK	88.26	-20.45	-38.13	-39.16	8.15	-27.45
4	#5922.27	49.41 AV	68.26	-18.85	-57.01	-57.02	8.15	-45.85

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

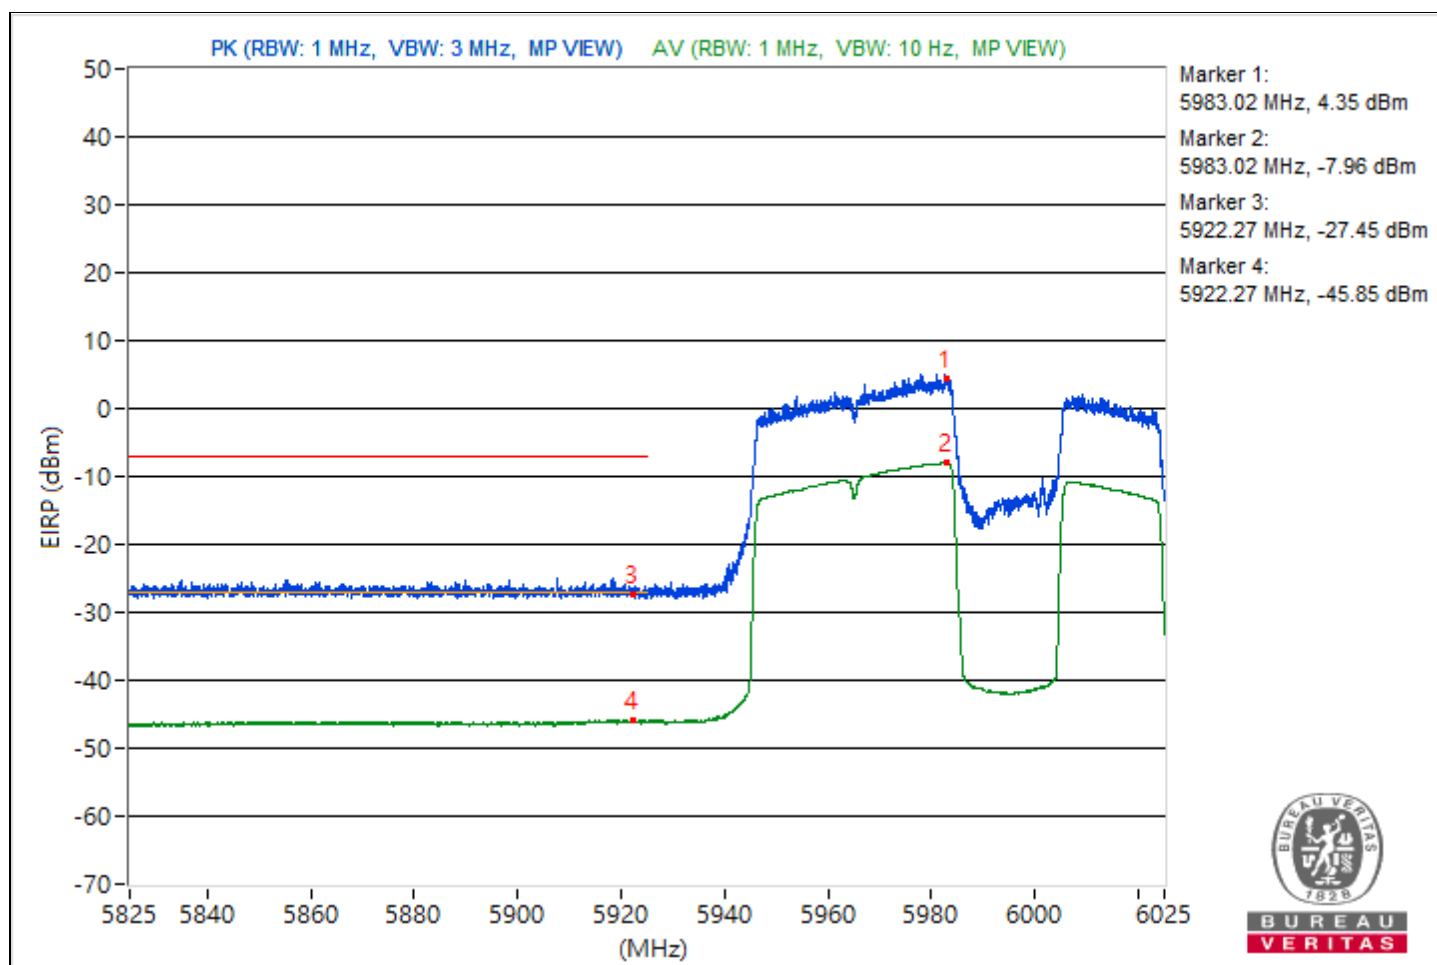


RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 167 : 6785 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6782.95	97.68 PK			-8.99	-8.53	8.17	2.42
2	*6782.95	87.34 AV			-20	-18.35	8.17	-7.92
3	#7212.47	57.08 PK	88.26	-31.18	-49.44	-49.29	8.17	-38.18
4	#7212.47	41.42 AV	68.26	-26.84	-64.91	-65.14	8.17	-53.84

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

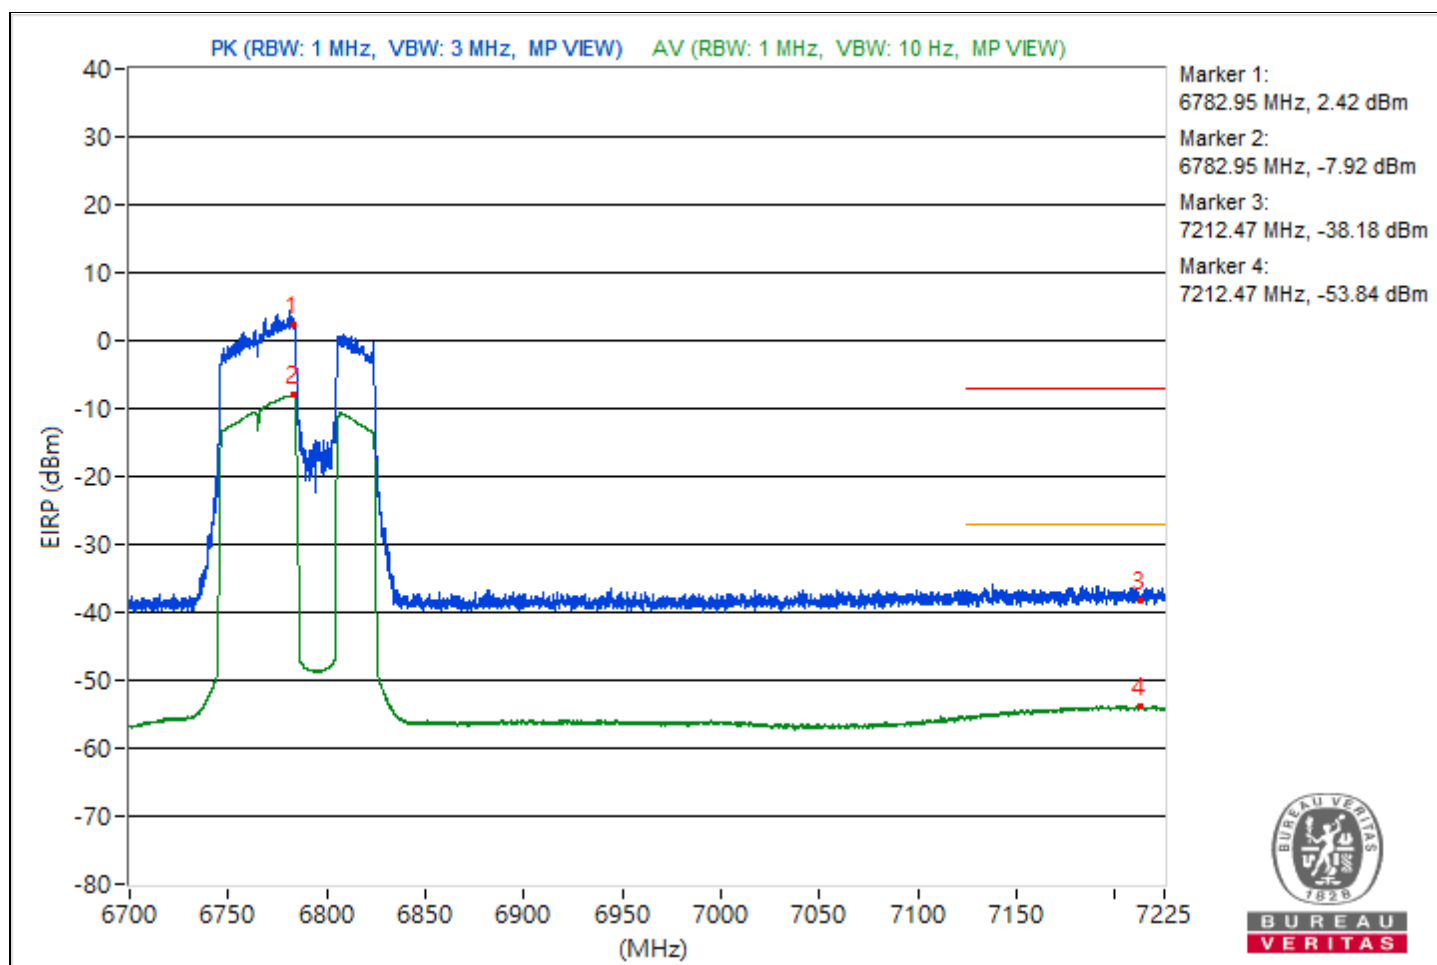


RF Mode	802.11be (EHT160) Punctured by 20 MHz	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.85	98.69 PK			-7.21	-8.33	8.15	3.43
2	*6022.85	87.22 AV			-19.02	-19.38	8.15	-8.04
3	#5921.8	67.23 PK	88.26	-21.03	-38.4	-40.15	8.15	-28.03
4	#5921.8	49.46 AV	68.26	-18.8	-57.22	-56.71	8.15	-45.8

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

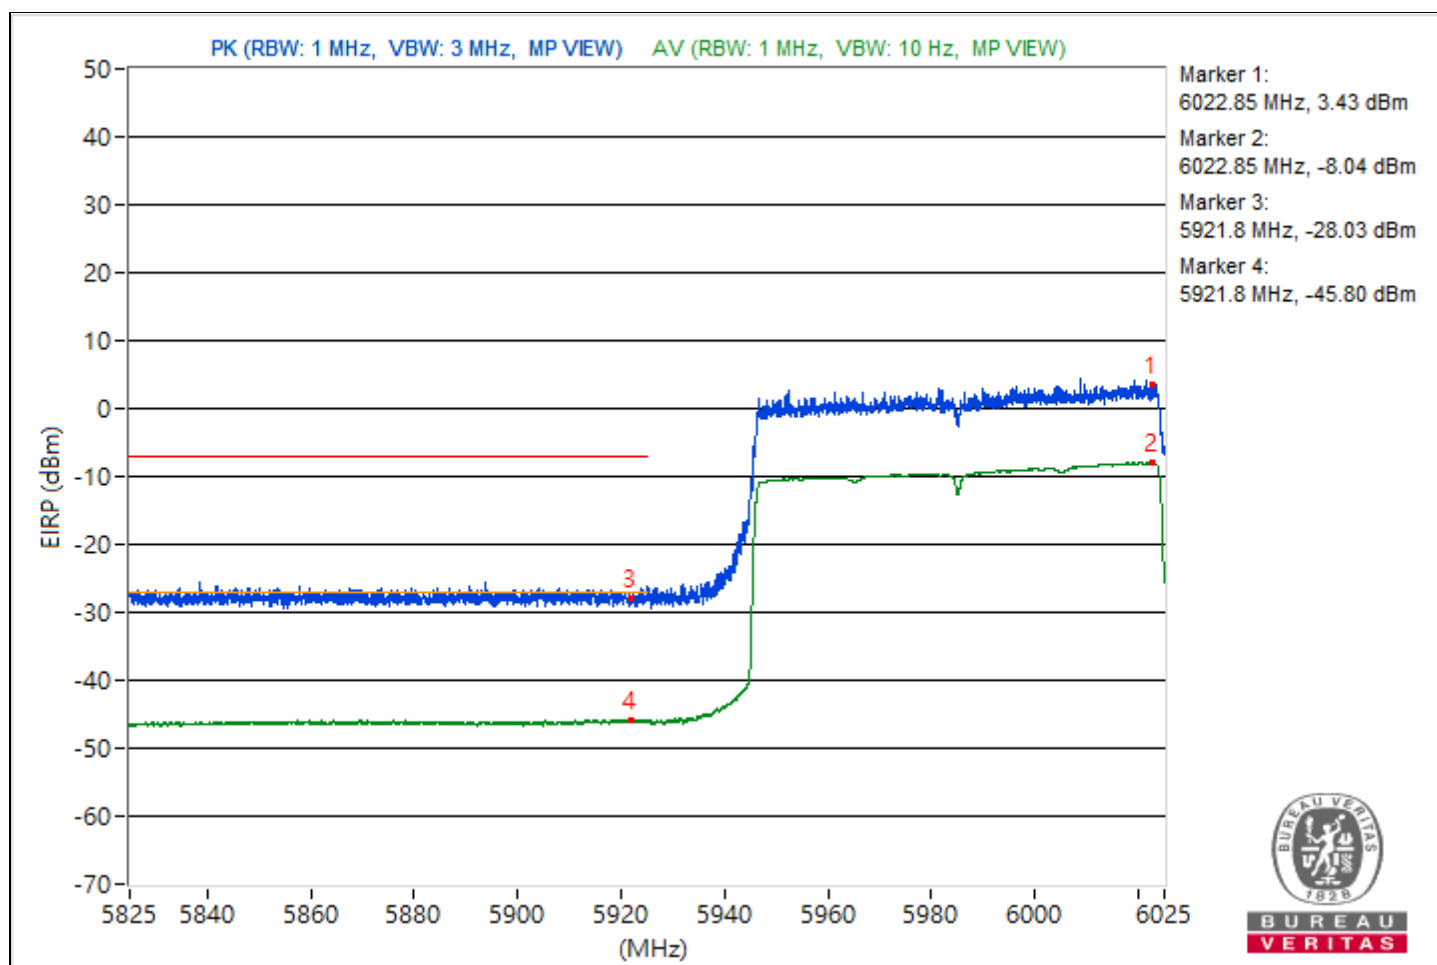


RF Mode	802.11be (EHT160) Punctured by 20 MHz	Channel	CH 143 : 6665 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6700.07	94.04 PK			-12.04	-12.8	8.17	-1.22
2	*6700.07	85.74 AV			-20.68	-20.73	8.17	-9.52
3	#7190.02	56.33 PK	88.26	-31.93	-49.36	-51.02	8.17	-38.93
4	#7190.02	41.82 AV	68.26	-26.44	-64.75	-64.5	8.17	-53.44

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

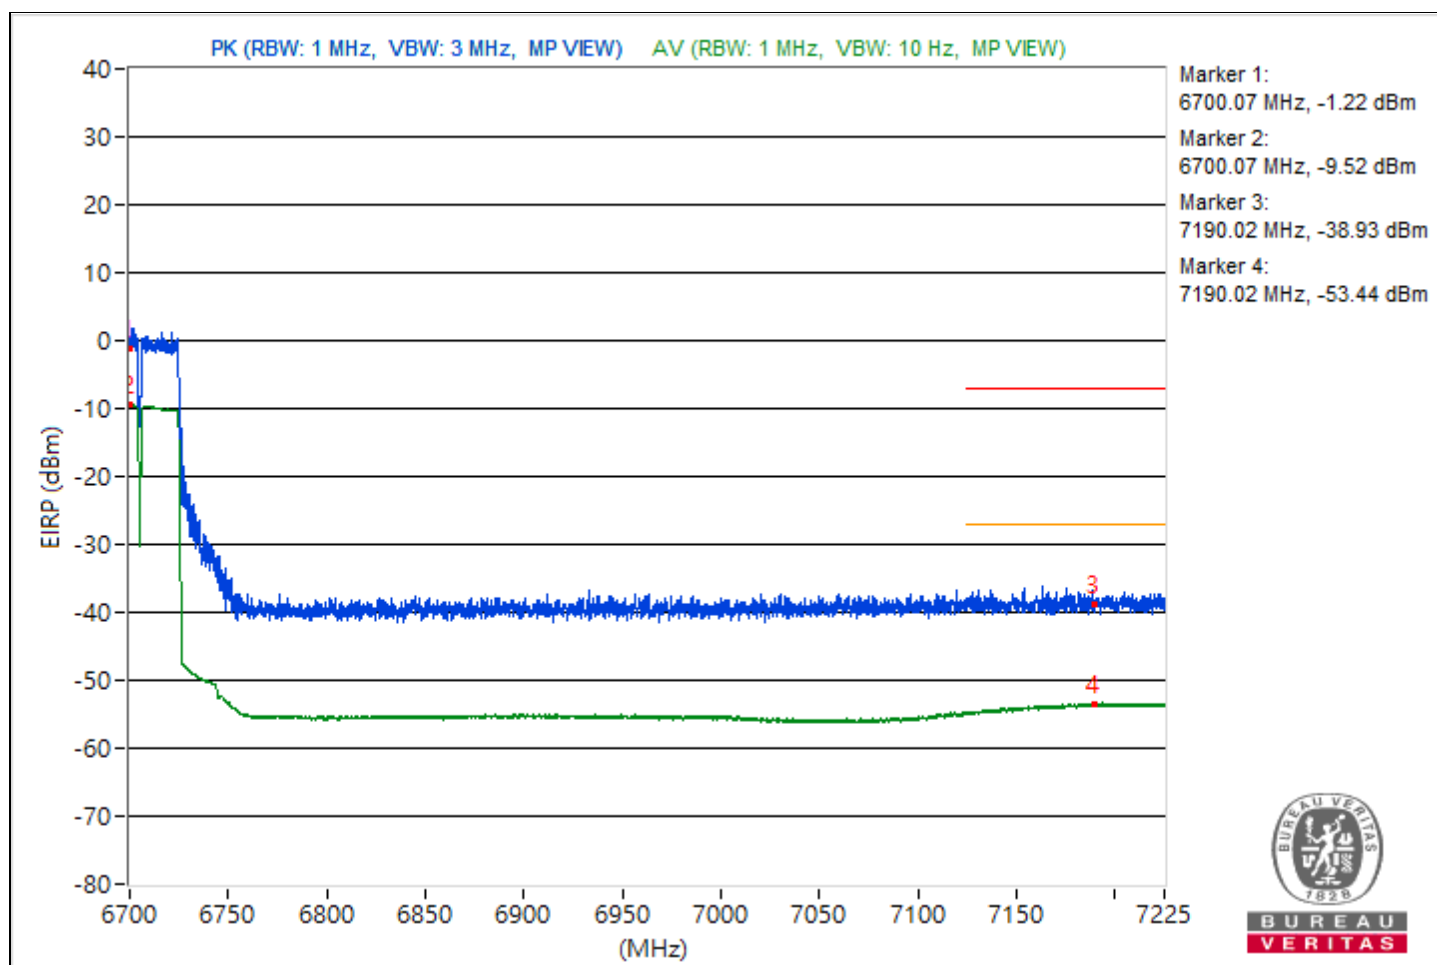


RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.65	97.6 PK			-9.01	-8.63	8.15	2.34
2	*6022.65	88.25 AV			-18.16	-18.19	8.15	-7.01
3	#5919.02	65.88 PK	88.26	-22.38	-40.92	-40.19	8.15	-29.38
4	#5919.02	49.91 AV	68.26	-18.35	-56.24	-56.8	8.15	-45.35

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

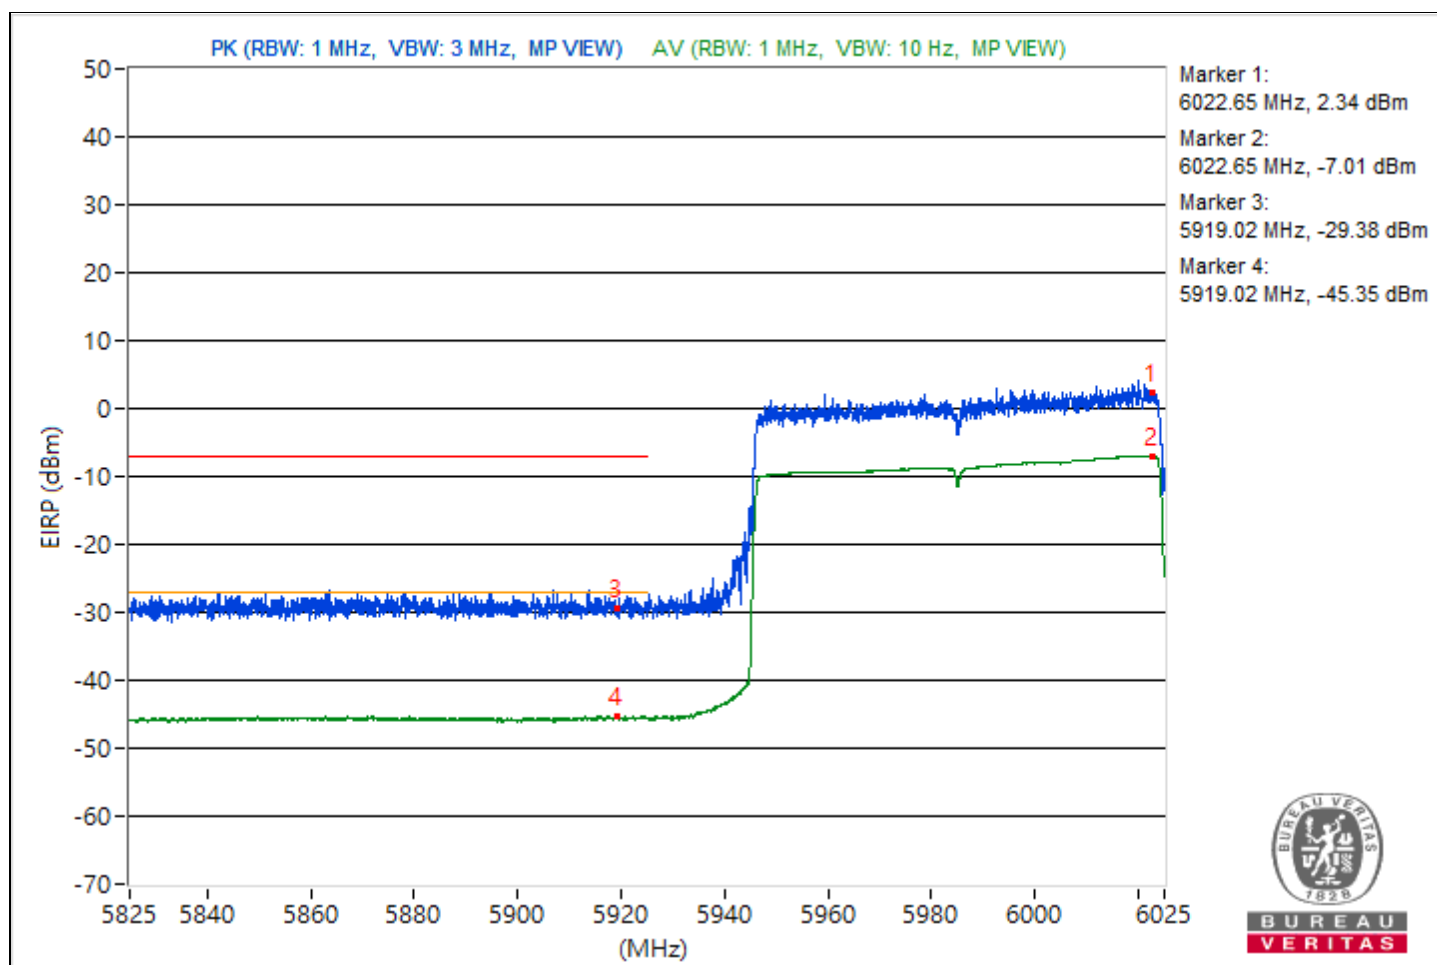


RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 143 : 6665 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 60% RH	Tested By	Dolly Chung

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6700	94.81 PK			-12.06	-11.24	8.17	-0.45
2	*6700	86.28 AV			-20.15	-20.17	8.17	-8.98
3	#7185.56	55.49 PK	88.26	-32.77	-50.68	-51.23	8.17	-39.77
4	#7185.56	41.92 AV	68.26	-26.34	-64.56	-64.48	8.17	-53.34

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

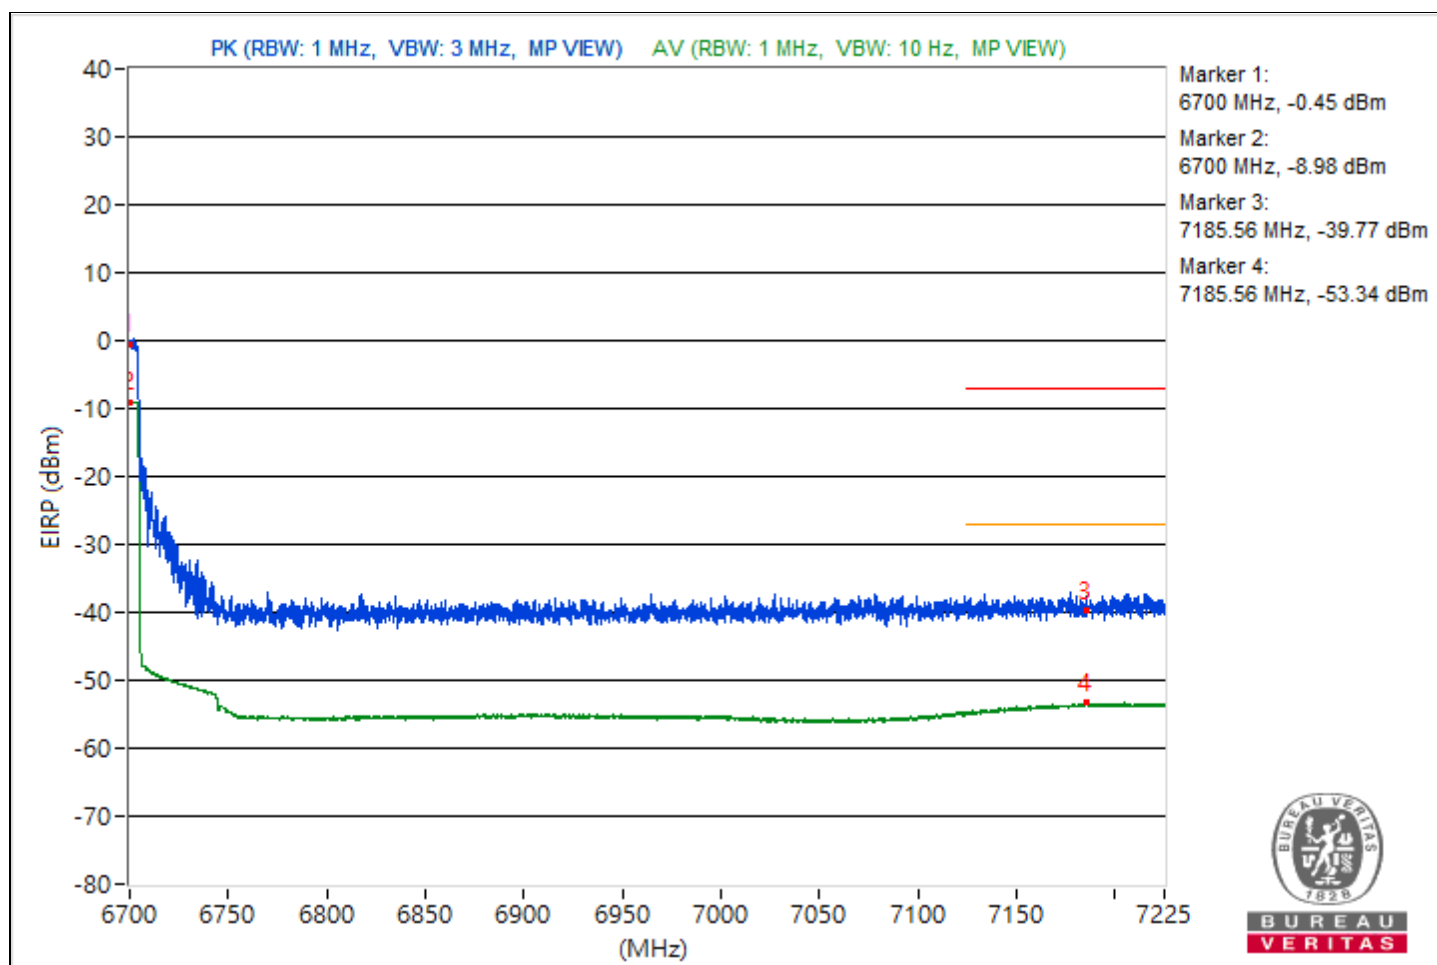

Mode B

1TX

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	48.8 PK	74.0	-25.2	1.66 H	313	36.6	12.2
2	11920.00	39.7 AV	54.0	-14.3	1.66 H	313	27.5	12.2
3	17880.00	46.5 PK	74.0	-27.5	2.06 H	175	23.5	23.0
4	17880.00	36.3 AV	54.0	-17.7	2.06 H	175	13.3	23.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	47.6 PK	74.0	-26.4	1.56 V	204	35.4	12.2
2	11920.00	37.4 AV	54.0	-16.6	1.56 V	204	25.2	12.2
3	17880.00	47.2 PK	74.0	-26.8	1.63 V	152	24.2	23.0
4	17880.00	37.3 AV	54.0	-16.7	1.63 V	152	14.3	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.7 PK	74.0	-25.3	1.71 H	315	36.5	12.2
2	11910.00	39.8 AV	54.0	-14.2	1.71 H	315	27.6	12.2
3	17865.00	46.1 PK	74.0	-27.9	2.05 H	170	23.5	22.6
4	17865.00	36.0 AV	54.0	-18.0	2.05 H	170	13.4	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.3 PK	74.0	-26.7	1.58 V	202	35.1	12.2
2	11910.00	37.3 AV	54.0	-16.7	1.58 V	202	25.1	12.2
3	17865.00	47.2 PK	74.0	-26.8	1.60 V	148	24.6	22.6
4	17865.00	37.4 AV	54.0	-16.6	1.60 V	148	14.8	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	49.1 PK	74.0	-24.9	1.64 H	328	37.6	11.5
2	12350.00	39.8 AV	54.0	-14.2	1.64 H	328	28.3	11.5
3	18525.00	46.0 PK	74.0	-28.0	2.04 H	172	51.9	-5.9
4	18525.00	35.8 AV	54.0	-18.2	2.04 H	172	41.7	-5.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.3 PK	74.0	-26.7	1.59 V	205	35.8	11.5
2	12350.00	37.1 AV	54.0	-16.9	1.59 V	205	25.6	11.5
3	18525.00	47.0 PK	74.0	-27.0	1.66 V	160	52.9	-5.9
4	18525.00	37.3 AV	54.0	-16.7	1.66 V	160	43.2	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.1 PK	88.2	-39.1	1.62 H	313	37.2	11.9
2	#12830.00	40.2 AV	68.2	-28.0	1.62 H	313	28.3	11.9
3	19245.00	46.0 PK	74.0	-28.0	2.01 H	167	51.4	-5.4
4	19245.00	36.0 AV	54.0	-18.0	2.01 H	167	41.4	-5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.9 PK	88.2	-40.3	1.55 V	211	36.0	11.9
2	#12830.00	37.6 AV	68.2	-30.6	1.55 V	211	25.7	11.9
3	19245.00	47.5 PK	74.0	-26.5	1.62 V	152	52.9	-5.4
4	19245.00	37.5 AV	54.0	-16.5	1.62 V	152	42.9	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.3 PK	88.2	-39.9	1.64 H	298	36.1	12.2
2	#13070.00	39.3 AV	68.2	-28.9	1.64 H	298	27.1	12.2
3	19605.00	46.5 PK	74.0	-27.5	2.04 H	190	52.1	-5.6
4	19605.00	36.1 AV	54.0	-17.9	2.04 H	190	41.7	-5.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.5 PK	88.2	-40.7	1.53 V	207	35.3	12.2
2	#13070.00	37.1 AV	68.2	-31.1	1.53 V	207	24.9	12.2
3	19605.00	46.5 PK	74.0	-27.5	1.67 V	157	52.1	-5.6
4	19605.00	36.9 AV	54.0	-17.1	1.67 V	157	42.5	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	49.0 PK	74.0	-25.0	1.65 H	315	35.0	14.0
2	13390.00	39.7 AV	54.0	-14.3	1.65 H	315	25.7	14.0
3	20085.00	46.6 PK	74.0	-27.4	2.01 H	190	51.6	-5.0
4	20085.00	36.3 AV	54.0	-17.7	2.01 H	190	41.3	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	47.3 PK	74.0	-26.7	1.55 V	220	33.3	14.0
2	13390.00	36.7 AV	54.0	-17.3	1.55 V	220	22.7	14.0
3	20085.00	46.8 PK	74.0	-27.2	1.61 V	142	51.8	-5.0
4	20085.00	37.2 AV	54.0	-16.8	1.61 V	142	42.2	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.0 PK	88.2	-39.2	1.64 H	313	35.3	13.7
2	#13710.00	40.0 AV	68.2	-28.2	1.64 H	313	26.3	13.7
3	20565.00	46.9 PK	74.0	-27.1	2.07 H	171	51.2	-4.3
4	20565.00	36.4 AV	54.0	-17.6	2.07 H	171	40.7	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.5 PK	88.2	-40.7	1.49 V	198	33.8	13.7
2	#13710.00	37.1 AV	68.2	-31.1	1.49 V	198	23.4	13.7
3	20565.00	46.6 PK	74.0	-27.4	1.64 V	147	50.9	-4.3
4	20565.00	36.8 AV	54.0	-17.2	1.64 V	147	41.1	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	48.4 PK	74.0	-25.6	1.70 H	317	36.2	12.2
2	11920.00	39.4 AV	54.0	-14.6	1.70 H	317	27.2	12.2
3	17880.00	46.2 PK	74.0	-27.8	2.05 H	188	23.2	23.0
4	17880.00	36.1 AV	54.0	-17.9	2.05 H	188	13.1	23.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	48.0 PK	74.0	-26.0	1.54 V	210	35.8	12.2
2	11920.00	37.5 AV	54.0	-16.5	1.54 V	210	25.3	12.2
3	17880.00	46.7 PK	74.0	-27.3	1.70 V	148	23.7	23.0
4	17880.00	37.0 AV	54.0	-17.0	1.70 V	148	14.0	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.0 PK	74.0	-25.0	1.68 H	299	36.8	12.2
2	11910.00	39.9 AV	54.0	-14.1	1.68 H	299	27.7	12.2
3	17865.00	46.7 PK	74.0	-27.3	2.08 H	173	24.1	22.6
4	17865.00	36.3 AV	54.0	-17.7	2.08 H	173	13.7	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	46.9 PK	74.0	-27.1	1.59 V	216	34.7	12.2
2	11910.00	36.7 AV	54.0	-17.3	1.59 V	216	24.5	12.2
3	17865.00	46.7 PK	74.0	-27.3	1.72 V	171	24.1	22.6
4	17865.00	37.2 AV	54.0	-16.8	1.72 V	171	14.6	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	49.1 PK	74.0	-24.9	1.61 H	319	37.6	11.5
2	12350.00	39.7 AV	54.0	-14.3	1.61 H	319	28.2	11.5
3	18525.00	46.2 PK	74.0	-27.8	2.05 H	167	52.1	-5.9
4	18525.00	35.8 AV	54.0	-18.2	2.05 H	167	41.7	-5.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	46.8 PK	74.0	-27.2	1.56 V	193	35.3	11.5
2	12350.00	36.6 AV	54.0	-17.4	1.56 V	193	25.1	11.5
3	18525.00	45.9 PK	74.0	-28.1	1.65 V	150	51.8	-5.9
4	18525.00	36.5 AV	54.0	-17.5	1.65 V	150	42.4	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.3 PK	88.2	-39.9	1.66 H	308	36.4	11.9
2	#12830.00	39.3 AV	68.2	-28.9	1.66 H	308	27.4	11.9
3	19245.00	46.8 PK	74.0	-27.2	2.12 H	164	52.2	-5.4
4	19245.00	36.8 AV	54.0	-17.2	2.12 H	164	42.2	-5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.7 PK	88.2	-40.5	1.59 V	219	35.8	11.9
2	#12830.00	37.3 AV	68.2	-30.9	1.59 V	219	25.4	11.9
3	19245.00	46.6 PK	74.0	-27.4	1.70 V	153	52.0	-5.4
4	19245.00	37.2 AV	54.0	-16.8	1.70 V	153	42.6	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.6 PK	88.2	-39.6	1.64 H	325	36.4	12.2
2	#13070.00	39.3 AV	68.2	-28.9	1.64 H	325	27.1	12.2
3	19605.00	46.7 PK	74.0	-27.3	2.12 H	184	52.3	-5.6
4	19605.00	36.8 AV	54.0	-17.2	2.12 H	184	42.4	-5.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.0 PK	88.2	-40.2	1.47 V	206	35.8	12.2
2	#13070.00	37.3 AV	68.2	-30.9	1.47 V	206	25.1	12.2
3	19605.00	46.7 PK	74.0	-27.3	1.64 V	171	52.3	-5.6
4	19605.00	37.2 AV	54.0	-16.8	1.64 V	171	42.8	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.8 PK	74.0	-25.2	1.61 H	328	34.8	14.0
2	13390.00	39.5 AV	54.0	-14.5	1.61 H	328	25.5	14.0
3	20085.00	46.9 PK	74.0	-27.1	2.02 H	172	51.9	-5.0
4	20085.00	36.6 AV	54.0	-17.4	2.02 H	172	41.6	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	47.4 PK	74.0	-26.6	1.50 V	210	33.4	14.0
2	13390.00	37.2 AV	54.0	-16.8	1.50 V	210	23.2	14.0
3	20085.00	46.5 PK	74.0	-27.5	1.68 V	155	51.5	-5.0
4	20085.00	37.0 AV	54.0	-17.0	1.68 V	155	42.0	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.9 PK	88.2	-39.3	1.65 H	309	35.2	13.7
2	#13710.00	39.9 AV	68.2	-28.3	1.65 H	309	26.2	13.7
3	20565.00	46.3 PK	74.0	-27.7	2.12 H	187	50.6	-4.3
4	20565.00	36.4 AV	54.0	-17.6	2.12 H	187	40.7	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.2 PK	88.2	-41.0	1.57 V	211	33.5	13.7
2	#13710.00	37.1 AV	68.2	-31.1	1.57 V	211	23.4	13.7
3	20565.00	45.9 PK	74.0	-28.1	1.61 V	152	50.2	-4.3
4	20565.00	36.4 AV	54.0	-17.6	1.61 V	152	40.7	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	49.0 PK	74.0	-25.0	1.63 H	316	36.8	12.2
2	11930.00	40.0 AV	54.0	-14.0	1.63 H	316	27.8	12.2
3	17895.00	46.9 PK	74.0	-27.1	2.09 H	171	23.6	23.3
4	17895.00	36.4 AV	54.0	-17.6	2.09 H	171	13.1	23.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	47.4 PK	74.0	-26.6	1.53 V	201	35.2	12.2
2	11930.00	37.0 AV	54.0	-17.0	1.53 V	201	24.8	12.2
3	17895.00	47.0 PK	74.0	-27.0	1.72 V	172	23.7	23.3
4	17895.00	37.2 AV	54.0	-16.8	1.72 V	172	13.9	23.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	49.0 PK	74.0	-25.0	1.69 H	313	37.4	11.6
2	12330.00	40.0 AV	54.0	-14.0	1.69 H	313	28.4	11.6
3	18495.00	46.3 PK	74.0	-27.7	2.10 H	180	52.1	-5.8
4	18495.00	36.0 AV	54.0	-18.0	2.10 H	180	41.8	-5.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	47.1 PK	74.0	-26.9	1.54 V	213	35.5	11.6
2	12330.00	36.7 AV	54.0	-17.3	1.54 V	213	25.1	11.6
3	18495.00	46.4 PK	74.0	-27.6	1.66 V	164	52.2	-5.8
4	18495.00	36.6 AV	54.0	-17.4	1.66 V	164	42.4	-5.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	48.8 PK	88.2	-39.4	1.64 H	320	37.0	11.8
2	#12810.00	39.5 AV	68.2	-28.7	1.64 H	320	27.7	11.8
3	19215.00	46.9 PK	74.0	-27.1	2.04 H	176	52.4	-5.5
4	19215.00	36.6 AV	54.0	-17.4	2.04 H	176	42.1	-5.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	47.8 PK	88.2	-40.4	1.52 V	216	36.0	11.8
2	#12810.00	37.2 AV	68.2	-31.0	1.52 V	216	25.4	11.8
3	19215.00	46.4 PK	74.0	-27.6	1.65 V	158	51.9	-5.5
4	19215.00	37.1 AV	54.0	-16.9	1.65 V	158	42.6	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	48.5 PK	88.2	-39.7	1.69 H	312	36.2	12.3
2	#13130.00	39.4 AV	68.2	-28.8	1.69 H	312	27.1	12.3
3	19695.00	46.2 PK	74.0	-27.8	2.08 H	186	51.3	-5.1
4	19695.00	36.2 AV	54.0	-17.8	2.08 H	186	41.3	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	48.0 PK	88.2	-40.2	1.53 V	212	35.7	12.3
2	#13130.00	37.5 AV	68.2	-30.7	1.53 V	212	25.2	12.3
3	19695.00	46.5 PK	74.0	-27.5	1.67 V	170	51.6	-5.1
4	19695.00	37.0 AV	54.0	-17.0	1.67 V	170	42.1	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	49.2 PK	88.2	-39.0	1.67 H	325	35.2	14.0
2	#13450.00	39.9 AV	68.2	-28.3	1.67 H	325	25.9	14.0
3	20175.00	47.2 PK	74.0	-26.8	2.09 H	175	51.9	-4.7
4	20175.00	36.7 AV	54.0	-17.3	2.09 H	175	41.4	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	48.0 PK	88.2	-40.2	1.40 V	193	34.0	14.0
2	#13450.00	37.4 AV	68.2	-30.8	1.40 V	193	23.4	14.0
3	20175.00	46.9 PK	74.0	-27.1	1.54 V	154	51.6	-4.7
4	20175.00	37.5 AV	54.0	-16.5	1.54 V	154	42.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	49.1 PK	88.2	-39.1	1.66 H	319	35.4	13.7
2	#13690.00	40.1 AV	68.2	-28.1	1.66 H	319	26.4	13.7
3	20535.00	46.8 PK	74.0	-27.2	2.05 H	191	51.1	-4.3
4	20535.00	36.8 AV	54.0	-17.2	2.05 H	191	41.1	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	47.9 PK	88.2	-40.3	1.41 V	197	34.2	13.7
2	#13690.00	37.6 AV	68.2	-30.6	1.41 V	197	23.9	13.7
3	20535.00	46.8 PK	74.0	-27.2	1.57 V	156	51.1	-4.3
4	20535.00	37.4 AV	54.0	-16.6	1.57 V	156	41.7	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.8 PK	74.0	-25.2	1.72 H	324	36.6	12.2
2	11970.00	39.6 AV	54.0	-14.4	1.72 H	324	27.4	12.2
3	17955.00	46.5 PK	74.0	-27.5	2.01 H	186	21.0	25.5
4	17955.00	36.2 AV	54.0	-17.8	2.01 H	186	10.7	25.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	47.9 PK	74.0	-26.1	1.43 V	209	35.7	12.2
2	11970.00	37.0 AV	54.0	-17.0	1.43 V	209	24.8	12.2
3	17955.00	46.6 PK	74.0	-27.4	1.57 V	160	21.1	25.5
4	17955.00	37.2 AV	54.0	-16.8	1.57 V	160	11.7	25.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	49.0 PK	74.0	-25.0	1.67 H	309	37.3	11.7
2	12290.00	39.6 AV	54.0	-14.4	1.67 H	309	27.9	11.7
3	18435.00	46.5 PK	74.0	-27.5	2.05 H	161	52.4	-5.9
4	18435.00	36.2 AV	54.0	-17.8	2.05 H	161	42.1	-5.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	48.6 PK	74.0	-25.4	1.41 V	207	36.9	11.7
2	12290.00	37.8 AV	54.0	-16.2	1.41 V	207	26.1	11.7
3	18435.00	46.3 PK	74.0	-27.7	1.54 V	164	52.2	-5.9
4	18435.00	37.1 AV	54.0	-16.9	1.54 V	164	43.0	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	49.2 PK	88.2	-39.0	1.61 H	308	37.4	11.8
2	#12770.00	39.8 AV	68.2	-28.4	1.61 H	308	28.0	11.8
3	19155.00	46.4 PK	74.0	-27.6	2.07 H	181	51.9	-5.5
4	19155.00	36.3 AV	54.0	-17.7	2.07 H	181	41.8	-5.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	47.7 PK	88.2	-40.5	1.35 V	181	35.9	11.8
2	#12770.00	37.0 AV	68.2	-31.2	1.35 V	181	25.2	11.8
3	19155.00	47.1 PK	74.0	-26.9	1.57 V	156	52.6	-5.5
4	19155.00	37.6 AV	54.0	-16.4	1.57 V	156	43.1	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	50.0 PK	74.0	-24.0	1.58 H	304	37.1	12.9
2	13250.00	40.3 AV	54.0	-13.7	1.58 H	304	27.4	12.9
3	19875.00	46.7 PK	74.0	-27.3	2.08 H	172	51.9	-5.2
4	19875.00	36.8 AV	54.0	-17.2	2.08 H	172	42.0	-5.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	48.2 PK	74.0	-25.8	1.41 V	183	35.3	12.9
2	13250.00	37.4 AV	54.0	-16.6	1.41 V	183	24.5	12.9
3	19875.00	47.1 PK	74.0	-26.9	1.62 V	168	52.3	-5.2
4	19875.00	37.7 AV	54.0	-16.3	1.62 V	168	42.9	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	48.7 PK	88.2	-39.5	1.61 H	310	34.7	14.0
2	#13410.00	39.4 AV	68.2	-28.8	1.61 H	310	25.4	14.0
3	20115.00	46.8 PK	74.0	-27.2	2.08 H	183	51.7	-4.9
4	20115.00	36.8 AV	54.0	-17.2	2.08 H	183	41.7	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	48.2 PK	88.2	-40.0	1.41 V	203	34.2	14.0
2	#13410.00	37.5 AV	68.2	-30.7	1.41 V	203	23.5	14.0
3	20115.00	47.1 PK	74.0	-26.9	1.60 V	155	52.0	-4.9
4	20115.00	37.7 AV	54.0	-16.3	1.60 V	155	42.6	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	48.8 PK	88.2	-39.4	1.57 H	315	34.9	13.9
2	#13570.00	39.5 AV	68.2	-28.7	1.57 H	315	25.6	13.9
3	20355.00	46.4 PK	74.0	-27.6	2.01 H	187	50.8	-4.4
4	20355.00	36.2 AV	54.0	-17.8	2.01 H	187	40.6	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	47.7 PK	88.2	-40.5	1.31 V	185	33.8	13.9
2	#13570.00	37.1 AV	68.2	-31.1	1.31 V	185	23.2	13.9
3	20355.00	47.5 PK	74.0	-26.5	1.60 V	149	51.9	-4.4
4	20355.00	38.0 AV	54.0	-16.0	1.60 V	149	42.4	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	49.6 PK	74.0	-24.4	1.63 H	324	37.4	12.2
2	12050.00	40.2 AV	54.0	-13.8	1.63 H	324	28.0	12.2
3	18075.00	45.9 PK	74.0	-28.1	2.08 H	188	51.7	-5.8
4	18075.00	36.0 AV	54.0	-18.0	2.08 H	188	41.8	-5.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	47.9 PK	74.0	-26.1	1.35 V	196	35.7	12.2
2	12050.00	37.1 AV	54.0	-16.9	1.35 V	196	24.9	12.2
3	18075.00	47.0 PK	74.0	-27.0	1.48 V	167	52.8	-5.8
4	18075.00	37.8 AV	54.0	-16.2	1.48 V	167	43.6	-5.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	48.4 PK	74.0	-25.6	1.63 H	325	37.0	11.4
2	12370.00	39.4 AV	54.0	-14.6	1.63 H	325	28.0	11.4
3	18555.00	46.5 PK	74.0	-27.5	2.06 H	183	52.3	-5.8
4	18555.00	36.6 AV	54.0	-17.4	2.06 H	183	42.4	-5.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	48.4 PK	74.0	-25.6	1.36 V	192	37.0	11.4
2	12370.00	37.7 AV	54.0	-16.3	1.36 V	192	26.3	11.4
3	18555.00	46.9 PK	74.0	-27.1	1.56 V	145	52.7	-5.8
4	18555.00	37.4 AV	54.0	-16.6	1.56 V	145	43.2	-5.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	49.5 PK	74.0	-24.5	1.67 H	316	37.6	11.9
2	12690.00	40.2 AV	54.0	-13.8	1.67 H	316	28.3	11.9
3	19035.00	46.3 PK	74.0	-27.7	2.01 H	170	51.9	-5.6
4	19035.00	35.9 AV	54.0	-18.1	2.01 H	170	41.5	-5.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	47.8 PK	74.0	-26.2	1.44 V	184	35.9	11.9
2	12690.00	37.0 AV	54.0	-17.0	1.44 V	184	25.1	11.9
3	19035.00	46.7 PK	74.0	-27.3	1.58 V	139	52.3	-5.6
4	19035.00	37.6 AV	54.0	-16.4	1.58 V	139	43.2	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.7 PK	74.0	-25.3	1.70 H	312	35.0	13.7
2	13330.00	39.6 AV	54.0	-14.4	1.70 H	312	25.9	13.7
3	19995.00	46.1 PK	74.0	-27.9	2.01 H	169	51.2	-5.1
4	19995.00	36.0 AV	54.0	-18.0	2.01 H	169	41.1	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.2 PK	74.0	-25.8	1.50 V	185	34.5	13.7
2	13330.00	37.7 AV	54.0	-16.3	1.50 V	185	24.0	13.7
3	19995.00	47.7 PK	74.0	-26.3	1.52 V	138	52.8	-5.1
4	19995.00	38.1 AV	54.0	-15.9	1.52 V	138	43.2	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12210.00	48.2 PK	74.0	-25.8	1.68 H	320	36.1	12.1
2	12210.00	39.2 AV	54.0	-14.8	1.68 H	320	27.1	12.1
3	18315.00	46.1 PK	74.0	-27.9	2.02 H	178	52.0	-5.9
4	18315.00	36.1 AV	54.0	-17.9	2.02 H	178	42.0	-5.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12210.00	48.1 PK	74.0	-25.9	1.55 V	169	36.0	12.1
2	12210.00	37.7 AV	54.0	-16.3	1.55 V	169	25.6	12.1
3	18315.00	47.9 PK	74.0	-26.1	1.58 V	151	53.8	-5.9
4	18315.00	38.4 AV	54.0	-15.6	1.58 V	151	44.3	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	48.7 PK	74.0	-25.3	1.76 H	316	36.9	11.8
2	12530.00	39.8 AV	54.0	-14.2	1.76 H	316	28.0	11.8
3	18795.00	46.0 PK	74.0	-28.0	1.96 H	171	51.7	-5.7
4	18795.00	36.0 AV	54.0	-18.0	1.96 H	171	41.7	-5.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	48.5 PK	74.0	-25.5	1.50 V	174	36.7	11.8
2	12530.00	37.8 AV	54.0	-16.2	1.50 V	174	26.0	11.8
3	18795.00	47.0 PK	74.0	-27.0	1.52 V	152	52.7	-5.7
4	18795.00	37.7 AV	54.0	-16.3	1.52 V	152	43.4	-5.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	47.4 PK	74.0	-26.6	1.76 H	315	35.2	12.2
2	11920.00	39.0 AV	54.0	-15.0	1.76 H	315	26.8	12.2
3	17880.00	46.4 PK	74.0	-27.6	2.12 H	196	23.4	23.0
4	17880.00	36.1 AV	54.0	-17.9	2.12 H	196	13.1	23.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	47.8 PK	74.0	-26.2	1.51 V	204	35.6	12.2
2	11920.00	37.1 AV	54.0	-16.9	1.51 V	204	24.9	12.2
3	17880.00	47.4 PK	74.0	-26.6	1.66 V	167	24.4	23.0
4	17880.00	38.0 AV	54.0	-16.0	1.66 V	167	15.0	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.0 PK	74.0	-27.0	1.73 H	319	34.8	12.2
2	11910.00	38.7 AV	54.0	-15.3	1.73 H	319	26.5	12.2
3	17865.00	46.7 PK	74.0	-27.3	2.18 H	187	24.1	22.6
4	17865.00	36.6 AV	54.0	-17.4	2.18 H	187	14.0	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.9 PK	74.0	-26.1	1.53 V	213	35.7	12.2
2	11910.00	37.1 AV	54.0	-16.9	1.53 V	213	24.9	12.2
3	17865.00	47.3 PK	74.0	-26.7	1.67 V	165	24.7	22.6
4	17865.00	38.1 AV	54.0	-15.9	1.67 V	165	15.5	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.5 PK	74.0	-26.5	1.74 H	309	36.0	11.5
2	12350.00	39.1 AV	54.0	-14.9	1.74 H	309	27.6	11.5
3	18525.00	46.8 PK	74.0	-27.2	2.11 H	190	52.7	-5.9
4	18525.00	36.5 AV	54.0	-17.5	2.11 H	190	42.4	-5.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.0 PK	74.0	-26.0	1.46 V	197	36.5	11.5
2	12350.00	37.3 AV	54.0	-16.7	1.46 V	197	25.8	11.5
3	18525.00	47.2 PK	74.0	-26.8	1.64 V	167	53.1	-5.9
4	18525.00	37.7 AV	54.0	-16.3	1.64 V	167	43.6	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.4 PK	88.2	-40.8	1.78 H	314	35.5	11.9
2	#12830.00	39.0 AV	68.2	-29.2	1.78 H	314	27.1	11.9
3	19245.00	46.4 PK	74.0	-27.6	2.16 H	188	51.8	-5.4
4	19245.00	35.9 AV	54.0	-18.1	2.16 H	188	41.3	-5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.8 PK	88.2	-40.4	1.49 V	196	35.9	11.9
2	#12830.00	37.3 AV	68.2	-30.9	1.49 V	196	25.4	11.9
3	19245.00	47.2 PK	74.0	-26.8	1.68 V	169	52.6	-5.4
4	19245.00	37.7 AV	54.0	-16.3	1.68 V	169	43.1	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.4 PK	88.2	-40.8	1.75 H	310	35.2	12.2
2	#13070.00	39.1 AV	68.2	-29.1	1.75 H	310	26.9	12.2
3	19605.00	46.7 PK	74.0	-27.3	2.15 H	202	52.3	-5.6
4	19605.00	36.2 AV	54.0	-17.8	2.15 H	202	41.8	-5.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.7 PK	88.2	-40.5	1.57 V	200	35.5	12.2
2	#13070.00	37.2 AV	68.2	-31.0	1.57 V	200	25.0	12.2
3	19605.00	47.7 PK	74.0	-26.3	1.69 V	167	53.3	-5.6
4	19605.00	38.2 AV	54.0	-15.8	1.69 V	167	43.8	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	47.8 PK	74.0	-26.2	1.72 H	313	33.8	14.0
2	13390.00	39.3 AV	54.0	-14.7	1.72 H	313	25.3	14.0
3	20085.00	46.7 PK	74.0	-27.3	2.07 H	187	51.7	-5.0
4	20085.00	36.3 AV	54.0	-17.7	2.07 H	187	41.3	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.3 PK	74.0	-25.7	1.50 V	220	34.3	14.0
2	13390.00	37.4 AV	54.0	-16.6	1.50 V	220	23.4	14.0
3	20085.00	47.6 PK	74.0	-26.4	1.70 V	177	52.6	-5.0
4	20085.00	38.3 AV	54.0	-15.7	1.70 V	177	43.3	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	46.8 PK	88.2	-41.4	1.78 H	325	33.1	13.7
2	#13710.00	38.6 AV	68.2	-29.6	1.78 H	325	24.9	13.7
3	20565.00	46.1 PK	74.0	-27.9	2.12 H	180	50.4	-4.3
4	20565.00	35.9 AV	54.0	-18.1	2.12 H	180	40.2	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.2 PK	88.2	-41.0	1.48 V	206	33.5	13.7
2	#13710.00	36.7 AV	68.2	-31.5	1.48 V	206	23.0	13.7
3	20565.00	47.6 PK	74.0	-26.4	1.61 V	155	51.9	-4.3
4	20565.00	38.0 AV	54.0	-16.0	1.61 V	155	42.3	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	47.1 PK	74.0	-26.9	1.79 H	328	34.9	12.2
2	11920.00	38.6 AV	54.0	-15.4	1.79 H	328	26.4	12.2
3	17880.00	46.7 PK	74.0	-27.3	2.13 H	188	23.7	23.0
4	17880.00	36.1 AV	54.0	-17.9	2.13 H	188	13.1	23.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	48.1 PK	74.0	-25.9	1.47 V	216	35.9	12.2
2	11920.00	37.6 AV	54.0	-16.4	1.47 V	216	25.4	12.2
3	17880.00	47.3 PK	74.0	-26.7	1.66 V	158	24.3	23.0
4	17880.00	38.1 AV	54.0	-15.9	1.66 V	158	15.1	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.5 PK	74.0	-26.5	1.73 H	300	35.3	12.2
2	11910.00	39.1 AV	54.0	-14.9	1.73 H	300	26.9	12.2
3	17865.00	46.2 PK	74.0	-27.8	2.13 H	190	23.6	22.6
4	17865.00	35.8 AV	54.0	-18.2	2.13 H	190	13.2	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.3 PK	74.0	-26.7	1.48 V	197	35.1	12.2
2	11910.00	36.8 AV	54.0	-17.2	1.48 V	197	24.6	12.2
3	17865.00	46.9 PK	74.0	-27.1	1.62 V	153	24.3	22.6
4	17865.00	37.6 AV	54.0	-16.4	1.62 V	153	15.0	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.1 PK	74.0	-26.9	1.80 H	315	35.6	11.5
2	12350.00	38.8 AV	54.0	-15.2	1.80 H	315	27.3	11.5
3	18525.00	46.4 PK	74.0	-27.6	2.12 H	202	52.3	-5.9
4	18525.00	36.2 AV	54.0	-17.8	2.12 H	202	42.1	-5.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.5 PK	74.0	-26.5	1.53 V	193	36.0	11.5
2	12350.00	37.0 AV	54.0	-17.0	1.53 V	193	25.5	11.5
3	18525.00	46.9 PK	74.0	-27.1	1.69 V	178	52.8	-5.9
4	18525.00	37.7 AV	54.0	-16.3	1.69 V	178	43.6	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.4 PK	88.2	-40.8	1.79 H	329	35.5	11.9
2	#12830.00	39.1 AV	68.2	-29.1	1.79 H	329	27.2	11.9
3	19245.00	45.9 PK	74.0	-28.1	2.16 H	182	51.3	-5.4
4	19245.00	35.9 AV	54.0	-18.1	2.16 H	182	41.3	-5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.2 PK	88.2	-41.0	1.53 V	205	35.3	11.9
2	#12830.00	36.8 AV	68.2	-31.4	1.53 V	205	24.9	11.9
3	19245.00	47.5 PK	74.0	-26.5	1.65 V	166	52.9	-5.4
4	19245.00	38.2 AV	54.0	-15.8	1.65 V	166	43.6	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.2 PK	88.2	-41.0	1.75 H	310	35.0	12.2
2	#13070.00	38.9 AV	68.2	-29.3	1.75 H	310	26.7	12.2
3	19605.00	46.5 PK	74.0	-27.5	2.17 H	202	52.1	-5.6
4	19605.00	36.3 AV	54.0	-17.7	2.17 H	202	41.9	-5.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.8 PK	88.2	-40.4	1.55 V	199	35.6	12.2
2	#13070.00	37.2 AV	68.2	-31.0	1.55 V	199	25.0	12.2
3	19605.00	47.9 PK	74.0	-26.1	1.67 V	173	53.5	-5.6
4	19605.00	38.5 AV	54.0	-15.5	1.67 V	173	44.1	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	47.7 PK	74.0	-26.3	1.75 H	307	33.7	14.0
2	13390.00	39.4 AV	54.0	-14.6	1.75 H	307	25.4	14.0
3	20085.00	46.1 PK	74.0	-27.9	2.13 H	193	51.1	-5.0
4	20085.00	35.9 AV	54.0	-18.1	2.13 H	193	40.9	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.4 PK	74.0	-25.6	1.57 V	188	34.4	14.0
2	13390.00	37.6 AV	54.0	-16.4	1.57 V	188	23.6	14.0
3	20085.00	47.2 PK	74.0	-26.8	1.60 V	179	52.2	-5.0
4	20085.00	37.6 AV	54.0	-16.4	1.60 V	179	42.6	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.1 PK	88.2	-40.1	1.75 H	310	34.4	13.7
2	#13710.00	39.4 AV	68.2	-28.8	1.75 H	310	25.7	13.7
3	20565.00	46.0 PK	74.0	-28.0	2.14 H	196	50.3	-4.3
4	20565.00	35.7 AV	54.0	-18.3	2.14 H	196	40.0	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.1 PK	88.2	-40.1	1.49 V	195	34.4	13.7
2	#13710.00	37.4 AV	68.2	-30.8	1.49 V	195	23.7	13.7
3	20565.00	47.7 PK	74.0	-26.3	1.61 V	164	52.0	-4.3
4	20565.00	38.2 AV	54.0	-15.8	1.61 V	164	42.5	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	47.2 PK	74.0	-26.8	1.79 H	302	35.0	12.2
2	11920.00	39.0 AV	54.0	-15.0	1.79 H	302	26.8	12.2
3	17880.00	46.3 PK	74.0	-27.7	2.06 H	203	23.3	23.0
4	17880.00	35.8 AV	54.0	-18.2	2.06 H	203	12.8	23.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	47.4 PK	74.0	-26.6	1.48 V	190	35.2	12.2
2	11920.00	36.9 AV	54.0	-17.1	1.48 V	190	24.7	12.2
3	17880.00	47.8 PK	74.0	-26.2	1.65 V	171	24.8	23.0
4	17880.00	38.4 AV	54.0	-15.6	1.65 V	171	15.4	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.3 PK	74.0	-26.7	1.74 H	321	35.1	12.2
2	11910.00	38.9 AV	54.0	-15.1	1.74 H	321	26.7	12.2
3	17865.00	46.1 PK	74.0	-27.9	2.11 H	199	23.5	22.6
4	17865.00	35.6 AV	54.0	-18.4	2.11 H	199	13.0	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.3 PK	74.0	-26.7	1.52 V	212	35.1	12.2
2	11910.00	36.9 AV	54.0	-17.1	1.52 V	212	24.7	12.2
3	17865.00	46.8 PK	74.0	-27.2	1.66 V	169	24.2	22.6
4	17865.00	37.7 AV	54.0	-16.3	1.66 V	169	15.1	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.6 PK	74.0	-26.4	1.77 H	300	36.1	11.5
2	12350.00	39.0 AV	54.0	-15.0	1.77 H	300	27.5	11.5
3	18525.00	46.8 PK	74.0	-27.2	2.09 H	198	52.7	-5.9
4	18525.00	36.3 AV	54.0	-17.7	2.09 H	198	42.2	-5.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.9 PK	74.0	-26.1	1.48 V	191	36.4	11.5
2	12350.00	37.0 AV	54.0	-17.0	1.48 V	191	25.5	11.5
3	18525.00	46.8 PK	74.0	-27.2	1.65 V	153	52.7	-5.9
4	18525.00	37.5 AV	54.0	-16.5	1.65 V	153	43.4	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.4 PK	88.2	-40.8	1.73 H	305	35.5	11.9
2	#12830.00	38.7 AV	68.2	-29.5	1.73 H	305	26.8	11.9
3	19245.00	47.1 PK	74.0	-26.9	2.08 H	194	52.5	-5.4
4	19245.00	36.6 AV	54.0	-17.4	2.08 H	194	42.0	-5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.6 PK	88.2	-40.6	1.47 V	217	35.7	11.9
2	#12830.00	37.0 AV	68.2	-31.2	1.47 V	217	25.1	11.9
3	19245.00	47.4 PK	74.0	-26.6	1.67 V	154	52.8	-5.4
4	19245.00	38.3 AV	54.0	-15.7	1.67 V	154	43.7	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.1 PK	88.2	-41.1	1.75 H	322	34.9	12.2
2	#13070.00	38.6 AV	68.2	-29.6	1.75 H	322	26.4	12.2
3	19605.00	46.5 PK	74.0	-27.5	2.06 H	204	52.1	-5.6
4	19605.00	36.2 AV	54.0	-17.8	2.06 H	204	41.8	-5.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.3 PK	88.2	-40.9	1.45 V	210	35.1	12.2
2	#13070.00	36.9 AV	68.2	-31.3	1.45 V	210	24.7	12.2
3	19605.00	47.1 PK	74.0	-26.9	1.61 V	163	52.7	-5.6
4	19605.00	37.8 AV	54.0	-16.2	1.61 V	163	43.4	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	47.4 PK	74.0	-26.6	1.75 H	316	33.4	14.0
2	13390.00	39.3 AV	54.0	-14.7	1.75 H	316	25.3	14.0
3	20085.00	47.1 PK	74.0	-26.9	2.11 H	192	52.1	-5.0
4	20085.00	36.6 AV	54.0	-17.4	2.11 H	192	41.6	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	47.6 PK	74.0	-26.4	1.54 V	200	33.6	14.0
2	13390.00	36.9 AV	54.0	-17.1	1.54 V	200	22.9	14.0
3	20085.00	47.7 PK	74.0	-26.3	1.61 V	177	52.7	-5.0
4	20085.00	38.1 AV	54.0	-15.9	1.61 V	177	43.1	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.7 PK	88.2	-40.5	1.76 H	303	34.0	13.7
2	#13710.00	39.3 AV	68.2	-28.9	1.76 H	303	25.6	13.7
3	20565.00	46.4 PK	74.0	-27.6	2.07 H	193	50.7	-4.3
4	20565.00	35.9 AV	54.0	-18.1	2.07 H	193	40.2	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.6 PK	88.2	-40.6	1.46 V	196	33.9	13.7
2	#13710.00	37.0 AV	68.2	-31.2	1.46 V	196	23.3	13.7
3	20565.00	47.6 PK	74.0	-26.4	1.65 V	163	51.9	-4.3
4	20565.00	37.9 AV	54.0	-16.1	1.65 V	163	42.2	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.3 PK	74.0	-25.7	1.82 H	339	36.1	12.2
2	11970.00	39.7 AV	54.0	-14.3	1.82 H	339	27.5	12.2
3	17955.00	45.7 PK	74.0	-28.3	2.23 H	193	20.2	25.5
4	17955.00	35.3 AV	54.0	-18.7	2.23 H	193	9.8	25.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.8 PK	74.0	-25.2	1.47 V	197	36.6	12.2
2	11970.00	37.8 AV	54.0	-16.2	1.47 V	197	25.6	12.2
3	17955.00	47.0 PK	74.0	-27.0	1.63 V	114	21.5	25.5
4	17955.00	36.9 AV	54.0	-17.1	1.63 V	114	11.4	25.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	48.5 PK	88.2	-39.7	1.77 H	352	34.6	13.9
2	#13570.00	39.7 AV	68.2	-28.5	1.77 H	352	25.8	13.9
3	20355.00	46.1 PK	74.0	-27.9	2.19 H	205	50.5	-4.4
4	20355.00	35.4 AV	54.0	-18.6	2.19 H	205	39.8	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	49.3 PK	88.2	-38.9	1.51 V	205	35.4	13.9
2	#13570.00	38.2 AV	68.2	-30.0	1.51 V	205	24.3	13.9
3	20355.00	47.3 PK	74.0	-26.7	1.58 V	98	51.7	-4.4
4	20355.00	37.3 AV	54.0	-16.7	1.58 V	98	41.7	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 20 MHz	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.6 PK	74.0	-25.4	1.78 H	330	36.4	12.2
2	12050.00	40.0 AV	54.0	-14.0	1.78 H	330	27.8	12.2
3	18075.00	45.7 PK	74.0	-28.3	2.22 H	201	51.5	-5.8
4	18075.00	35.0 AV	54.0	-19.0	2.22 H	201	40.8	-5.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.1 PK	74.0	-25.9	1.44 V	203	35.9	12.2
2	12050.00	37.4 AV	54.0	-16.6	1.44 V	203	25.2	12.2
3	18075.00	46.7 PK	74.0	-27.3	1.60 V	127	52.5	-5.8
4	18075.00	36.5 AV	54.0	-17.5	1.60 V	127	42.3	-5.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) Punctured by 20 MHz	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.6 PK	74.0	-25.4	1.87 H	340	34.9	13.7
2	13330.00	40.0 AV	54.0	-14.0	1.87 H	340	26.3	13.7
3	19995.00	45.7 PK	74.0	-28.3	2.24 H	194	50.8	-5.1
4	19995.00	35.1 AV	54.0	-18.9	2.24 H	194	40.2	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.8 PK	74.0	-25.2	1.44 V	206	35.1	13.7
2	13330.00	38.0 AV	54.0	-16.0	1.44 V	206	24.3	13.7
3	19995.00	46.7 PK	74.0	-27.3	1.57 V	101	51.8	-5.1
4	19995.00	36.7 AV	54.0	-17.3	1.57 V	101	41.8	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.3 PK	74.0	-25.7	1.78 H	337	36.1	12.2
2	12050.00	39.6 AV	54.0	-14.4	1.78 H	337	27.4	12.2
3	18075.00	46.5 PK	74.0	-27.5	2.28 H	203	52.3	-5.8
4	18075.00	35.8 AV	54.0	-18.2	2.28 H	203	41.6	-5.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.7 PK	74.0	-25.3	1.44 V	184	36.5	12.2
2	12050.00	38.0 AV	54.0	-16.0	1.44 V	184	25.8	12.2
3	18075.00	47.0 PK	74.0	-27.0	1.68 V	104	52.8	-5.8
4	18075.00	36.9 AV	54.0	-17.1	1.68 V	104	42.7	-5.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.6 PK	74.0	-25.4	1.78 H	350	34.9	13.7
2	13330.00	40.0 AV	54.0	-14.0	1.78 H	350	26.3	13.7
3	19995.00	45.8 PK	74.0	-28.2	2.28 H	204	50.9	-5.1
4	19995.00	35.6 AV	54.0	-18.4	2.28 H	204	40.7	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	46.8 PK	74.0	-27.2	1.47 V	205	33.1	13.7
2	13330.00	36.3 AV	54.0	-17.7	1.47 V	205	22.6	13.7
3	19995.00	47.8 PK	74.0	-26.2	1.57 V	159	52.9	-5.1
4	19995.00	38.4 AV	54.0	-15.6	1.57 V	159	43.5	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT320) Punctured by 40 MHz	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	47.7 PK	74.0	-26.3	1.76 H	324	35.9	11.8
2	12530.00	39.3 AV	54.0	-14.7	1.76 H	324	27.5	11.8
3	18795.00	45.8 PK	74.0	-28.2	2.21 H	198	51.5	-5.7
4	18795.00	35.6 AV	54.0	-18.4	2.21 H	198	41.3	-5.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	48.2 PK	74.0	-25.8	1.41 V	201	36.4	11.8
2	12530.00	37.3 AV	54.0	-16.7	1.41 V	201	25.5	11.8
3	18795.00	46.7 PK	74.0	-27.3	1.68 V	111	52.4	-5.7
4	18795.00	36.8 AV	54.0	-17.2	1.68 V	111	42.5	-5.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT320) Punctured by 80 MHz	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	47.8 PK	74.0	-26.2	1.83 H	325	36.0	11.8
2	12530.00	39.2 AV	54.0	-14.8	1.83 H	325	27.4	11.8
3	18795.00	45.6 PK	74.0	-28.4	2.28 H	192	51.3	-5.7
4	18795.00	34.9 AV	54.0	-19.1	2.28 H	192	40.6	-5.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	49.0 PK	74.0	-25.0	1.50 V	195	37.2	11.8
2	12530.00	37.8 AV	54.0	-16.2	1.50 V	195	26.0	11.8
3	18795.00	46.7 PK	74.0	-27.3	1.67 V	102	52.4	-5.7
4	18795.00	36.6 AV	54.0	-17.4	1.67 V	102	42.3	-5.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT320) Punctured by 80+40 MHz	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	48.4 PK	74.0	-25.6	1.79 H	339	36.6	11.8
2	12530.00	39.7 AV	54.0	-14.3	1.79 H	339	27.9	11.8
3	18795.00	45.9 PK	74.0	-28.1	2.23 H	199	51.6	-5.7
4	18795.00	35.5 AV	54.0	-18.5	2.23 H	199	41.2	-5.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	48.8 PK	74.0	-25.2	1.45 V	187	37.0	11.8
2	12530.00	37.9 AV	54.0	-16.1	1.45 V	187	26.1	11.8
3	18795.00	47.5 PK	74.0	-26.5	1.69 V	117	53.2	-5.7
4	18795.00	37.1 AV	54.0	-16.9	1.69 V	117	42.8	-5.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

2TX

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	48.6 PK	74.0	-25.4	1.66 H	319	36.4	12.2
2	11920.00	39.6 AV	54.0	-14.4	1.66 H	319	27.4	12.2
3	17880.00	46.6 PK	74.0	-27.4	2.08 H	166	23.6	23.0
4	17880.00	36.4 AV	54.0	-17.6	2.08 H	166	13.4	23.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	47.8 PK	74.0	-26.2	1.48 V	191	35.6	12.2
2	11920.00	37.4 AV	54.0	-16.6	1.48 V	191	25.2	12.2
3	17880.00	47.4 PK	74.0	-26.6	1.62 V	152	24.4	23.0
4	17880.00	37.7 AV	54.0	-16.3	1.62 V	152	14.7	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.7 PK	74.0	-26.3	1.63 H	310	35.5	12.2
2	11910.00	39.1 AV	54.0	-14.9	1.63 H	310	26.9	12.2
3	17865.00	46.5 PK	74.0	-27.5	2.12 H	171	23.9	22.6
4	17865.00	36.4 AV	54.0	-17.6	2.12 H	171	13.8	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.4 PK	74.0	-25.6	1.50 V	209	36.2	12.2
2	11910.00	38.0 AV	54.0	-16.0	1.50 V	209	25.8	12.2
3	17865.00	47.2 PK	74.0	-26.8	1.60 V	169	24.6	22.6
4	17865.00	37.9 AV	54.0	-16.1	1.60 V	169	15.3	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.8 PK	74.0	-26.2	1.65 H	290	36.3	11.5
2	12350.00	39.4 AV	54.0	-14.6	1.65 H	290	27.9	11.5
3	18525.00	46.0 PK	74.0	-28.0	2.10 H	192	51.9	-5.9
4	18525.00	36.0 AV	54.0	-18.0	2.10 H	192	41.9	-5.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.5 PK	74.0	-25.5	1.48 V	207	37.0	11.5
2	12350.00	37.7 AV	54.0	-16.3	1.48 V	207	26.2	11.5
3	18525.00	47.2 PK	74.0	-26.8	1.65 V	156	53.1	-5.9
4	18525.00	37.9 AV	54.0	-16.1	1.65 V	156	43.8	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.6 PK	88.2	-39.6	1.63 H	299	36.7	11.9
2	#12830.00	39.7 AV	68.2	-28.5	1.63 H	299	27.8	11.9
3	19245.00	46.8 PK	74.0	-27.2	2.08 H	179	52.2	-5.4
4	19245.00	36.5 AV	54.0	-17.5	2.08 H	179	41.9	-5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.2 PK	88.2	-40.0	1.49 V	200	36.3	11.9
2	#12830.00	37.5 AV	68.2	-30.7	1.49 V	200	25.6	11.9
3	19245.00	47.4 PK	74.0	-26.6	1.57 V	145	52.8	-5.4
4	19245.00	38.0 AV	54.0	-16.0	1.57 V	145	43.4	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.9 PK	88.2	-40.3	1.68 H	311	35.7	12.2
2	#13070.00	39.4 AV	68.2	-28.8	1.68 H	311	27.2	12.2
3	19605.00	46.0 PK	74.0	-28.0	2.10 H	182	51.6	-5.6
4	19605.00	36.1 AV	54.0	-17.9	2.10 H	182	41.7	-5.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.6 PK	88.2	-39.6	1.46 V	186	36.4	12.2
2	#13070.00	38.1 AV	68.2	-30.1	1.46 V	186	25.9	12.2
3	19605.00	47.6 PK	74.0	-26.4	1.55 V	171	53.2	-5.6
4	19605.00	38.0 AV	54.0	-16.0	1.55 V	171	43.6	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.4 PK	74.0	-25.6	1.72 H	295	34.4	14.0
2	13390.00	39.4 AV	54.0	-14.6	1.72 H	295	25.4	14.0
3	20085.00	46.6 PK	74.0	-27.4	2.07 H	174	51.6	-5.0
4	20085.00	36.6 AV	54.0	-17.4	2.07 H	174	41.6	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.5 PK	74.0	-25.5	1.41 V	208	34.5	14.0
2	13390.00	37.9 AV	54.0	-16.1	1.41 V	208	23.9	14.0
3	20085.00	47.5 PK	74.0	-26.5	1.64 V	161	52.5	-5.0
4	20085.00	38.2 AV	54.0	-15.8	1.64 V	161	43.2	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.4 PK	88.2	-39.8	1.68 H	308	34.7	13.7
2	#13710.00	39.6 AV	68.2	-28.6	1.68 H	308	25.9	13.7
3	20565.00	46.9 PK	74.0	-27.1	2.08 H	193	51.2	-4.3
4	20565.00	36.6 AV	54.0	-17.4	2.08 H	193	40.9	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.2 PK	88.2	-40.0	1.49 V	205	34.5	13.7
2	#13710.00	37.8 AV	68.2	-30.4	1.49 V	205	24.1	13.7
3	20565.00	47.1 PK	74.0	-26.9	1.56 V	146	51.4	-4.3
4	20565.00	37.8 AV	54.0	-16.2	1.56 V	146	42.1	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	47.7 PK	74.0	-26.3	1.67 H	298	35.5	12.2
2	11920.00	39.1 AV	54.0	-14.9	1.67 H	298	26.9	12.2
3	17880.00	46.7 PK	74.0	-27.3	2.04 H	179	23.7	23.0
4	17880.00	36.6 AV	54.0	-17.4	2.04 H	179	13.6	23.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	47.9 PK	74.0	-26.1	1.43 V	181	35.7	12.2
2	11920.00	37.2 AV	54.0	-16.8	1.43 V	181	25.0	12.2
3	17880.00	47.6 PK	74.0	-26.4	1.60 V	141	24.6	23.0
4	17880.00	38.2 AV	54.0	-15.8	1.60 V	141	15.2	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.7 PK	74.0	-26.3	1.71 H	295	35.5	12.2
2	11910.00	39.0 AV	54.0	-15.0	1.71 H	295	26.8	12.2
3	17865.00	46.5 PK	74.0	-27.5	2.07 H	189	23.9	22.6
4	17865.00	36.5 AV	54.0	-17.5	2.07 H	189	13.9	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.9 PK	74.0	-26.1	1.45 V	190	35.7	12.2
2	11910.00	37.3 AV	54.0	-16.7	1.45 V	190	25.1	12.2
3	17865.00	47.3 PK	74.0	-26.7	1.55 V	150	24.7	22.6
4	17865.00	37.7 AV	54.0	-16.3	1.55 V	150	15.1	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.6 PK	74.0	-25.4	1.67 H	293	37.1	11.5
2	12350.00	39.8 AV	54.0	-14.2	1.67 H	293	28.3	11.5
3	18525.00	47.0 PK	74.0	-27.0	2.07 H	168	52.9	-5.9
4	18525.00	36.7 AV	54.0	-17.3	2.07 H	168	42.6	-5.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.2 PK	74.0	-25.8	1.51 V	207	36.7	11.5
2	12350.00	37.7 AV	54.0	-16.3	1.51 V	207	26.2	11.5
3	18525.00	47.0 PK	74.0	-27.0	1.59 V	156	52.9	-5.9
4	18525.00	37.4 AV	54.0	-16.6	1.59 V	156	43.3	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.2 PK	88.2	-40.0	1.64 H	314	36.3	11.9
2	#12830.00	39.3 AV	68.2	-28.9	1.64 H	314	27.4	11.9
3	19245.00	46.3 PK	74.0	-27.7	2.03 H	185	51.7	-5.4
4	19245.00	36.4 AV	54.0	-17.6	2.03 H	185	41.8	-5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.7 PK	88.2	-40.5	1.47 V	210	35.8	11.9
2	#12830.00	37.4 AV	68.2	-30.8	1.47 V	210	25.5	11.9
3	19245.00	47.3 PK	74.0	-26.7	1.55 V	167	52.7	-5.4
4	19245.00	37.8 AV	54.0	-16.2	1.55 V	167	43.2	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.9 PK	88.2	-40.3	1.64 H	302	35.7	12.2
2	#13070.00	39.2 AV	68.2	-29.0	1.64 H	302	27.0	12.2
3	19605.00	46.4 PK	74.0	-27.6	2.05 H	194	52.0	-5.6
4	19605.00	36.3 AV	54.0	-17.7	2.05 H	194	41.9	-5.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.9 PK	88.2	-40.3	1.46 V	199	35.7	12.2
2	#13070.00	37.2 AV	68.2	-31.0	1.46 V	199	25.0	12.2
3	19605.00	47.6 PK	74.0	-26.4	1.64 V	170	53.2	-5.6
4	19605.00	38.0 AV	54.0	-16.0	1.64 V	170	43.6	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	47.8 PK	74.0	-26.2	1.61 H	308	33.8	14.0
2	13390.00	39.0 AV	54.0	-15.0	1.61 H	308	25.0	14.0
3	20085.00	46.4 PK	74.0	-27.6	2.05 H	179	51.4	-5.0
4	20085.00	36.5 AV	54.0	-17.5	2.05 H	179	41.5	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	47.7 PK	74.0	-26.3	1.52 V	192	33.7	14.0
2	13390.00	37.1 AV	54.0	-16.9	1.52 V	192	23.1	14.0
3	20085.00	46.9 PK	74.0	-27.1	1.65 V	162	51.9	-5.0
4	20085.00	37.3 AV	54.0	-16.7	1.65 V	162	42.3	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.2 PK	88.2	-40.0	1.63 H	316	34.5	13.7
2	#13710.00	39.6 AV	68.2	-28.6	1.63 H	316	25.9	13.7
3	20565.00	46.4 PK	74.0	-27.6	2.10 H	174	50.7	-4.3
4	20565.00	36.2 AV	54.0	-17.8	2.10 H	174	40.5	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.8 PK	88.2	-39.4	1.50 V	195	35.1	13.7
2	#13710.00	38.0 AV	68.2	-30.2	1.50 V	195	24.3	13.7
3	20565.00	47.3 PK	74.0	-26.7	1.58 V	141	51.6	-4.3
4	20565.00	38.2 AV	54.0	-15.8	1.58 V	141	42.5	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	49.0 PK	74.0	-25.0	1.70 H	291	36.8	12.2
2	11930.00	40.0 AV	54.0	-14.0	1.70 H	291	27.8	12.2
3	17895.00	46.8 PK	74.0	-27.2	2.07 H	170	23.5	23.3
4	17895.00	36.6 AV	54.0	-17.4	2.07 H	170	13.3	23.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	48.6 PK	74.0	-25.4	1.47 V	210	36.4	12.2
2	11930.00	37.9 AV	54.0	-16.1	1.47 V	210	25.7	12.2
3	17895.00	47.3 PK	74.0	-26.7	1.60 V	150	24.0	23.3
4	17895.00	37.8 AV	54.0	-16.2	1.60 V	150	14.5	23.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	48.0 PK	74.0	-26.0	1.66 H	305	36.4	11.6
2	12330.00	39.5 AV	54.0	-14.5	1.66 H	305	27.9	11.6
3	18495.00	45.7 PK	74.0	-28.3	2.06 H	196	51.5	-5.8
4	18495.00	35.9 AV	54.0	-18.1	2.06 H	196	41.7	-5.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	47.8 PK	74.0	-26.2	1.45 V	181	36.2	11.6
2	12330.00	37.4 AV	54.0	-16.6	1.45 V	181	25.8	11.6
3	18495.00	46.6 PK	74.0	-27.4	1.64 V	149	52.4	-5.8
4	18495.00	37.4 AV	54.0	-16.6	1.64 V	149	43.2	-5.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	48.6 PK	88.2	-39.6	1.69 H	291	36.8	11.8
2	#12810.00	39.6 AV	68.2	-28.6	1.69 H	291	27.8	11.8
3	19215.00	45.8 PK	74.0	-28.2	2.03 H	171	51.3	-5.5
4	19215.00	35.7 AV	54.0	-18.3	2.03 H	171	41.2	-5.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	47.7 PK	88.2	-40.5	1.44 V	190	35.9	11.8
2	#12810.00	37.2 AV	68.2	-31.0	1.44 V	190	25.4	11.8
3	19215.00	47.1 PK	74.0	-26.9	1.63 V	166	52.6	-5.5
4	19215.00	37.9 AV	54.0	-16.1	1.63 V	166	43.4	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	48.4 PK	88.2	-39.8	1.72 H	319	36.1	12.3
2	#13130.00	39.8 AV	68.2	-28.4	1.72 H	319	27.5	12.3
3	19695.00	45.9 PK	74.0	-28.1	2.05 H	168	51.0	-5.1
4	19695.00	35.8 AV	54.0	-18.2	2.05 H	168	40.9	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	48.3 PK	88.2	-39.9	1.49 V	205	36.0	12.3
2	#13130.00	37.6 AV	68.2	-30.6	1.49 V	205	25.3	12.3
3	19695.00	47.0 PK	74.0	-27.0	1.58 V	166	52.1	-5.1
4	19695.00	37.5 AV	54.0	-16.5	1.58 V	166	42.6	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	47.9 PK	88.2	-40.3	1.69 H	298	33.9	14.0
2	#13450.00	39.1 AV	68.2	-29.1	1.69 H	298	25.1	14.0
3	20175.00	46.6 PK	74.0	-27.4	2.08 H	192	51.3	-4.7
4	20175.00	36.5 AV	54.0	-17.5	2.08 H	192	41.2	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	47.7 PK	88.2	-40.5	1.41 V	184	33.7	14.0
2	#13450.00	37.3 AV	68.2	-30.9	1.41 V	184	23.3	14.0
3	20175.00	47.0 PK	74.0	-27.0	1.58 V	145	51.7	-4.7
4	20175.00	37.9 AV	54.0	-16.1	1.58 V	145	42.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	48.7 PK	88.2	-39.5	1.71 H	302	35.0	13.7
2	#13690.00	40.0 AV	68.2	-28.2	1.71 H	302	26.3	13.7
3	20535.00	46.6 PK	74.0	-27.4	2.10 H	176	50.9	-4.3
4	20535.00	36.3 AV	54.0	-17.7	2.10 H	176	40.6	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	47.4 PK	88.2	-40.8	1.52 V	188	33.7	13.7
2	#13690.00	37.1 AV	68.2	-31.1	1.52 V	188	23.4	13.7
3	20535.00	46.9 PK	74.0	-27.1	1.55 V	171	51.2	-4.3
4	20535.00	37.6 AV	54.0	-16.4	1.55 V	171	41.9	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.2 PK	74.0	-25.8	1.61 H	310	36.0	12.2
2	11970.00	39.4 AV	54.0	-14.6	1.61 H	310	27.2	12.2
3	17955.00	46.4 PK	74.0	-27.6	2.03 H	169	20.9	25.5
4	17955.00	36.4 AV	54.0	-17.6	2.03 H	169	10.9	25.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.0 PK	74.0	-26.0	1.41 V	198	35.8	12.2
2	11970.00	37.6 AV	54.0	-16.4	1.41 V	198	25.4	12.2
3	17955.00	46.7 PK	74.0	-27.3	1.61 V	171	21.2	25.5
4	17955.00	37.2 AV	54.0	-16.8	1.61 V	171	11.7	25.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	48.4 PK	74.0	-25.6	1.69 H	300	36.7	11.7
2	12290.00	39.4 AV	54.0	-14.6	1.69 H	300	27.7	11.7
3	18435.00	46.5 PK	74.0	-27.5	2.12 H	196	52.4	-5.9
4	18435.00	36.3 AV	54.0	-17.7	2.12 H	196	42.2	-5.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	48.4 PK	74.0	-25.6	1.47 V	202	36.7	11.7
2	12290.00	37.6 AV	54.0	-16.4	1.47 V	202	25.9	11.7
3	18435.00	47.2 PK	74.0	-26.8	1.56 V	159	53.1	-5.9
4	18435.00	37.7 AV	54.0	-16.3	1.56 V	159	43.6	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	48.2 PK	88.2	-40.0	1.61 H	299	36.4	11.8
2	#12770.00	39.6 AV	68.2	-28.6	1.61 H	299	27.8	11.8
3	19155.00	46.0 PK	74.0	-28.0	2.11 H	177	51.5	-5.5
4	19155.00	36.0 AV	54.0	-18.0	2.11 H	177	41.5	-5.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	47.9 PK	88.2	-40.3	1.43 V	197	36.1	11.8
2	#12770.00	37.5 AV	68.2	-30.7	1.43 V	197	25.7	11.8
3	19155.00	47.0 PK	74.0	-27.0	1.60 V	144	52.5	-5.5
4	19155.00	37.3 AV	54.0	-16.7	1.60 V	144	42.8	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	48.5 PK	74.0	-25.5	1.68 H	327	35.6	12.9
2	13250.00	39.6 AV	54.0	-14.4	1.68 H	327	26.7	12.9
3	19875.00	46.1 PK	74.0	-27.9	2.12 H	191	51.3	-5.2
4	19875.00	36.2 AV	54.0	-17.8	2.12 H	191	41.4	-5.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	48.5 PK	74.0	-25.5	1.43 V	182	35.6	12.9
2	13250.00	38.0 AV	54.0	-16.0	1.43 V	182	25.1	12.9
3	19875.00	47.6 PK	74.0	-26.4	1.50 V	157	52.8	-5.2
4	19875.00	38.2 AV	54.0	-15.8	1.50 V	157	43.4	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	48.2 PK	88.2	-40.0	1.62 H	313	34.2	14.0
2	#13410.00	39.3 AV	68.2	-28.9	1.62 H	313	25.3	14.0
3	20115.00	46.2 PK	74.0	-27.8	2.10 H	182	51.1	-4.9
4	20115.00	36.2 AV	54.0	-17.8	2.10 H	182	41.1	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	48.2 PK	88.2	-40.0	1.45 V	198	34.2	14.0
2	#13410.00	37.8 AV	68.2	-30.4	1.45 V	198	23.8	14.0
3	20115.00	47.3 PK	74.0	-26.7	1.55 V	142	52.2	-4.9
4	20115.00	37.8 AV	54.0	-16.2	1.55 V	142	42.7	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	48.4 PK	88.2	-39.8	1.67 H	302	34.5	13.9
2	#13570.00	39.5 AV	68.2	-28.7	1.67 H	302	25.6	13.9
3	20355.00	46.5 PK	74.0	-27.5	2.07 H	169	50.9	-4.4
4	20355.00	36.5 AV	54.0	-17.5	2.07 H	169	40.9	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	48.7 PK	88.2	-39.5	1.42 V	202	34.8	13.9
2	#13570.00	38.1 AV	68.2	-30.1	1.42 V	202	24.2	13.9
3	20355.00	47.8 PK	74.0	-26.2	1.54 V	132	52.2	-4.4
4	20355.00	38.0 AV	54.0	-16.0	1.54 V	132	42.4	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	47.6 PK	74.0	-26.4	1.68 H	307	35.4	12.2
2	12050.00	39.1 AV	54.0	-14.9	1.68 H	307	26.9	12.2
3	18075.00	46.9 PK	74.0	-27.1	2.08 H	180	52.7	-5.8
4	18075.00	36.6 AV	54.0	-17.4	2.08 H	180	42.4	-5.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.1 PK	74.0	-25.9	1.50 V	200	35.9	12.2
2	12050.00	37.7 AV	54.0	-16.3	1.50 V	200	25.5	12.2
3	18075.00	47.3 PK	74.0	-26.7	1.55 V	163	53.1	-5.8
4	18075.00	38.1 AV	54.0	-15.9	1.55 V	163	43.9	-5.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	47.9 PK	74.0	-26.1	1.72 H	316	36.5	11.4
2	12370.00	39.3 AV	54.0	-14.7	1.72 H	316	27.9	11.4
3	18555.00	45.7 PK	74.0	-28.3	2.09 H	181	51.5	-5.8
4	18555.00	35.8 AV	54.0	-18.2	2.09 H	181	41.6	-5.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	47.7 PK	74.0	-26.3	1.47 V	207	36.3	11.4
2	12370.00	37.3 AV	54.0	-16.7	1.47 V	207	25.9	11.4
3	18555.00	47.6 PK	74.0	-26.4	1.61 V	144	53.4	-5.8
4	18555.00	38.2 AV	54.0	-15.8	1.61 V	144	44.0	-5.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	47.9 PK	74.0	-26.1	1.70 H	314	36.0	11.9
2	12690.00	39.4 AV	54.0	-14.6	1.70 H	314	27.5	11.9
3	19035.00	46.7 PK	74.0	-27.3	2.03 H	170	52.3	-5.6
4	19035.00	36.7 AV	54.0	-17.3	2.03 H	170	42.3	-5.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.1 PK	74.0	-25.9	1.45 V	187	36.2	11.9
2	12690.00	37.3 AV	54.0	-16.7	1.45 V	187	25.4	11.9
3	19035.00	47.2 PK	74.0	-26.8	1.58 V	143	52.8	-5.6
4	19035.00	37.6 AV	54.0	-16.4	1.58 V	143	43.2	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.4 PK	74.0	-25.6	1.61 H	305	34.7	13.7
2	13330.00	39.5 AV	54.0	-14.5	1.61 H	305	25.8	13.7
3	19995.00	46.4 PK	74.0	-27.6	2.04 H	182	51.5	-5.1
4	19995.00	36.1 AV	54.0	-17.9	2.04 H	182	41.2	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.2 PK	74.0	-25.8	1.44 V	186	34.5	13.7
2	13330.00	37.7 AV	54.0	-16.3	1.44 V	186	24.0	13.7
3	19995.00	47.6 PK	74.0	-26.4	1.56 V	142	52.7	-5.1
4	19995.00	38.0 AV	54.0	-16.0	1.56 V	142	43.1	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12210.00	48.6 PK	74.0	-25.4	1.66 H	296	36.5	12.1
2	12210.00	39.8 AV	54.0	-14.2	1.66 H	296	27.7	12.1
3	18315.00	46.5 PK	74.0	-27.5	2.02 H	193	52.4	-5.9
4	18315.00	36.3 AV	54.0	-17.7	2.02 H	193	42.2	-5.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12210.00	47.9 PK	74.0	-26.1	1.38 V	182	35.8	12.1
2	12210.00	37.4 AV	54.0	-16.6	1.38 V	182	25.3	12.1
3	18315.00	47.0 PK	74.0	-27.0	1.60 V	154	52.9	-5.9
4	18315.00	37.6 AV	54.0	-16.4	1.60 V	154	43.5	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 62 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	48.1 PK	74.0	-25.9	1.63 H	296	36.3	11.8
2	12530.00	39.2 AV	54.0	-14.8	1.63 H	296	27.4	11.8
3	18795.00	45.9 PK	74.0	-28.1	2.00 H	190	51.6	-5.7
4	18795.00	35.8 AV	54.0	-18.2	2.00 H	190	41.5	-5.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	47.9 PK	74.0	-26.1	1.39 V	179	36.1	11.8
2	12530.00	37.3 AV	54.0	-16.7	1.39 V	179	25.5	11.8
3	18795.00	47.8 PK	74.0	-26.2	1.58 V	135	53.5	-5.7
4	18795.00	38.4 AV	54.0	-15.6	1.58 V	135	44.1	-5.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	47.6 PK	74.0	-26.4	1.72 H	314	35.4	12.2
2	11920.00	38.9 AV	54.0	-15.1	1.72 H	314	26.7	12.2
3	17880.00	46.2 PK	74.0	-27.8	2.15 H	202	23.2	23.0
4	17880.00	35.9 AV	54.0	-18.1	2.15 H	202	12.9	23.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	47.8 PK	74.0	-26.2	1.48 V	191	35.6	12.2
2	11920.00	37.4 AV	54.0	-16.6	1.48 V	191	25.2	12.2
3	17880.00	47.4 PK	74.0	-26.6	1.62 V	152	24.4	23.0
4	17880.00	37.7 AV	54.0	-16.3	1.62 V	152	14.7	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.2 PK	74.0	-26.8	1.78 H	301	35.0	12.2
2	11910.00	38.8 AV	54.0	-15.2	1.78 H	301	26.6	12.2
3	17865.00	46.0 PK	74.0	-28.0	2.13 H	183	23.4	22.6
4	17865.00	35.7 AV	54.0	-18.3	2.13 H	183	13.1	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.3 PK	74.0	-26.7	1.47 V	187	35.1	12.2
2	11910.00	37.0 AV	54.0	-17.0	1.47 V	187	24.8	12.2
3	17865.00	47.8 PK	74.0	-26.2	1.61 V	160	25.2	22.6
4	17865.00	38.2 AV	54.0	-15.8	1.61 V	160	15.6	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.2 PK	74.0	-25.8	1.69 H	315	36.7	11.5
2	12350.00	39.5 AV	54.0	-14.5	1.69 H	315	28.0	11.5
3	18525.00	46.4 PK	74.0	-27.6	2.13 H	173	52.3	-5.9
4	18525.00	36.4 AV	54.0	-17.6	2.13 H	173	42.3	-5.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.6 PK	74.0	-26.4	1.54 V	186	36.1	11.5
2	12350.00	37.2 AV	54.0	-16.8	1.54 V	186	25.7	11.5
3	18525.00	48.2 PK	74.0	-25.8	1.61 V	142	54.1	-5.9
4	18525.00	38.2 AV	54.0	-15.8	1.61 V	142	44.1	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.4 PK	88.2	-40.8	1.75 H	299	35.5	11.9
2	#12830.00	39.0 AV	68.2	-29.2	1.75 H	299	27.1	11.9
3	19245.00	46.3 PK	74.0	-27.7	2.09 H	200	51.7	-5.4
4	19245.00	36.2 AV	54.0	-17.8	2.09 H	200	41.6	-5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.9 PK	88.2	-40.3	1.44 V	194	36.0	11.9
2	#12830.00	37.7 AV	68.2	-30.5	1.44 V	194	25.8	11.9
3	19245.00	47.4 PK	74.0	-26.6	1.58 V	138	52.8	-5.4
4	19245.00	37.8 AV	54.0	-16.2	1.58 V	138	43.2	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.2 PK	88.2	-40.0	1.77 H	305	36.0	12.2
2	#13070.00	39.3 AV	68.2	-28.9	1.77 H	305	27.1	12.2
3	19605.00	46.3 PK	74.0	-27.7	2.13 H	203	51.9	-5.6
4	19605.00	36.1 AV	54.0	-17.9	2.13 H	203	41.7	-5.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.2 PK	88.2	-40.0	1.52 V	178	36.0	12.2
2	#13070.00	37.6 AV	68.2	-30.6	1.52 V	178	25.4	12.2
3	19605.00	46.8 PK	74.0	-27.2	1.60 V	164	52.4	-5.6
4	19605.00	37.2 AV	54.0	-16.8	1.60 V	164	42.8	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	47.7 PK	74.0	-26.3	1.78 H	328	33.7	14.0
2	13390.00	39.0 AV	54.0	-15.0	1.78 H	328	25.0	14.0
3	20085.00	46.5 PK	74.0	-27.5	2.13 H	195	51.5	-5.0
4	20085.00	36.5 AV	54.0	-17.5	2.13 H	195	41.5	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	47.8 PK	74.0	-26.2	1.48 V	202	33.8	14.0
2	13390.00	37.3 AV	54.0	-16.7	1.48 V	202	23.3	14.0
3	20085.00	47.8 PK	74.0	-26.2	1.67 V	146	52.8	-5.0
4	20085.00	38.1 AV	54.0	-15.9	1.67 V	146	43.1	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.5 PK	88.2	-40.7	1.72 H	297	33.8	13.7
2	#13710.00	38.8 AV	68.2	-29.4	1.72 H	297	25.1	13.7
3	20565.00	46.6 PK	74.0	-27.4	2.16 H	204	50.9	-4.3
4	20565.00	36.3 AV	54.0	-17.7	2.16 H	204	40.6	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.0 PK	88.2	-40.2	1.50 V	189	34.3	13.7
2	#13710.00	37.6 AV	68.2	-30.6	1.50 V	189	23.9	13.7
3	20565.00	48.1 PK	74.0	-25.9	1.59 V	145	52.4	-4.3
4	20565.00	38.1 AV	54.0	-15.9	1.59 V	145	42.4	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	47.3 PK	74.0	-26.7	1.74 H	307	35.1	12.2
2	11920.00	38.7 AV	54.0	-15.3	1.74 H	307	26.5	12.2
3	17880.00	46.2 PK	74.0	-27.8	2.05 H	188	23.2	23.0
4	17880.00	35.9 AV	54.0	-18.1	2.05 H	188	12.9	23.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	47.7 PK	74.0	-26.3	1.52 V	199	35.5	12.2
2	11920.00	37.2 AV	54.0	-16.8	1.52 V	199	25.0	12.2
3	17880.00	47.0 PK	74.0	-27.0	1.63 V	158	24.0	23.0
4	17880.00	37.3 AV	54.0	-16.7	1.63 V	158	14.3	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.9 PK	74.0	-26.1	1.75 H	316	35.7	12.2
2	11910.00	39.2 AV	54.0	-14.8	1.75 H	316	27.0	12.2
3	17865.00	46.7 PK	74.0	-27.3	2.11 H	182	24.1	22.6
4	17865.00	36.5 AV	54.0	-17.5	2.11 H	182	13.9	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.1 PK	74.0	-25.9	1.50 V	182	35.9	12.2
2	11910.00	37.5 AV	54.0	-16.5	1.50 V	182	25.3	12.2
3	17865.00	47.6 PK	74.0	-26.4	1.57 V	167	25.0	22.6
4	17865.00	37.9 AV	54.0	-16.1	1.57 V	167	15.3	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.1 PK	74.0	-26.9	1.73 H	316	35.6	11.5
2	12350.00	38.7 AV	54.0	-15.3	1.73 H	316	27.2	11.5
3	18525.00	45.9 PK	74.0	-28.1	2.06 H	203	51.8	-5.9
4	18525.00	35.9 AV	54.0	-18.1	2.06 H	203	41.8	-5.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.8 PK	74.0	-26.2	1.51 V	200	36.3	11.5
2	12350.00	37.2 AV	54.0	-16.8	1.51 V	200	25.7	11.5
3	18525.00	47.7 PK	74.0	-26.3	1.60 V	162	53.6	-5.9
4	18525.00	38.0 AV	54.0	-16.0	1.60 V	162	43.9	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.3 PK	88.2	-40.9	1.76 H	304	35.4	11.9
2	#12830.00	38.7 AV	68.2	-29.5	1.76 H	304	26.8	11.9
3	19245.00	46.6 PK	74.0	-27.4	2.08 H	174	52.0	-5.4
4	19245.00	36.4 AV	54.0	-17.6	2.08 H	174	41.8	-5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.6 PK	88.2	-40.6	1.53 V	207	35.7	11.9
2	#12830.00	37.2 AV	68.2	-31.0	1.53 V	207	25.3	11.9
3	19245.00	46.8 PK	74.0	-27.2	1.56 V	143	52.2	-5.4
4	19245.00	37.2 AV	54.0	-16.8	1.56 V	143	42.6	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.6 PK	88.2	-40.6	1.70 H	299	35.4	12.2
2	#13070.00	39.1 AV	68.2	-29.1	1.70 H	299	26.9	12.2
3	19605.00	47.0 PK	74.0	-27.0	2.10 H	179	52.6	-5.6
4	19605.00	36.7 AV	54.0	-17.3	2.10 H	179	42.3	-5.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.7 PK	88.2	-40.5	1.43 V	198	35.5	12.2
2	#13070.00	37.5 AV	68.2	-30.7	1.43 V	198	25.3	12.2
3	19605.00	47.0 PK	74.0	-27.0	1.58 V	136	52.6	-5.6
4	19605.00	37.3 AV	54.0	-16.7	1.58 V	136	42.9	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	47.8 PK	74.0	-26.2	1.77 H	320	33.8	14.0
2	13390.00	39.5 AV	54.0	-14.5	1.77 H	320	25.5	14.0
3	20085.00	46.4 PK	74.0	-27.6	2.10 H	200	51.4	-5.0
4	20085.00	36.1 AV	54.0	-17.9	2.10 H	200	41.1	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	47.6 PK	74.0	-26.4	1.50 V	189	33.6	14.0
2	13390.00	37.4 AV	54.0	-16.6	1.50 V	189	23.4	14.0
3	20085.00	47.3 PK	74.0	-26.7	1.63 V	148	52.3	-5.0
4	20085.00	37.3 AV	54.0	-16.7	1.63 V	148	42.3	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.7 PK	88.2	-40.5	1.69 H	315	34.0	13.7
2	#13710.00	39.0 AV	68.2	-29.2	1.69 H	315	25.3	13.7
3	20565.00	46.7 PK	74.0	-27.3	2.09 H	177	51.0	-4.3
4	20565.00	36.2 AV	54.0	-17.8	2.09 H	177	40.5	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	47.8 PK	88.2	-40.4	1.51 V	194	34.1	13.7
2	#13710.00	37.4 AV	68.2	-30.8	1.51 V	194	23.7	13.7
3	20565.00	47.9 PK	74.0	-26.1	1.57 V	156	52.2	-4.3
4	20565.00	38.0 AV	54.0	-16.0	1.57 V	156	42.3	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	48.2 PK	74.0	-25.8	1.70 H	309	36.0	12.2
2	11920.00	39.3 AV	54.0	-14.7	1.70 H	309	27.1	12.2
3	17880.00	46.8 PK	74.0	-27.2	2.14 H	182	23.8	23.0
4	17880.00	36.3 AV	54.0	-17.7	2.14 H	182	13.3	23.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	48.1 PK	74.0	-25.9	1.52 V	204	35.9	12.2
2	11920.00	37.7 AV	54.0	-16.3	1.52 V	204	25.5	12.2
3	17880.00	47.8 PK	74.0	-26.2	1.67 V	151	24.8	23.0
4	17880.00	38.0 AV	54.0	-16.0	1.67 V	151	15.0	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.8 PK	74.0	-26.2	1.72 H	324	35.6	12.2
2	11910.00	39.0 AV	54.0	-15.0	1.72 H	324	26.8	12.2
3	17865.00	46.8 PK	74.0	-27.2	2.09 H	190	24.2	22.6
4	17865.00	36.4 AV	54.0	-17.6	2.09 H	190	13.8	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.5 PK	74.0	-25.5	1.50 V	198	36.3	12.2
2	11910.00	37.8 AV	54.0	-16.2	1.50 V	198	25.6	12.2
3	17865.00	47.8 PK	74.0	-26.2	1.58 V	149	25.2	22.6
4	17865.00	38.2 AV	54.0	-15.8	1.58 V	149	15.6	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.0 PK	74.0	-27.0	1.79 H	310	35.5	11.5
2	12350.00	38.6 AV	54.0	-15.4	1.79 H	310	27.1	11.5
3	18525.00	46.5 PK	74.0	-27.5	2.14 H	195	52.4	-5.9
4	18525.00	36.5 AV	54.0	-17.5	2.14 H	195	42.4	-5.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.0 PK	74.0	-26.0	1.52 V	195	36.5	11.5
2	12350.00	37.5 AV	54.0	-16.5	1.52 V	195	26.0	11.5
3	18525.00	47.7 PK	74.0	-26.3	1.59 V	163	53.6	-5.9
4	18525.00	38.1 AV	54.0	-15.9	1.59 V	163	44.0	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.3 PK	88.2	-40.9	1.70 H	328	35.4	11.9
2	#12830.00	38.8 AV	68.2	-29.4	1.70 H	328	26.9	11.9
3	19245.00	45.7 PK	74.0	-28.3	2.08 H	181	51.1	-5.4
4	19245.00	35.8 AV	54.0	-18.2	2.08 H	181	41.2	-5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.7 PK	88.2	-40.5	1.47 V	210	35.8	11.9
2	#12830.00	37.4 AV	68.2	-30.8	1.47 V	210	25.5	11.9
3	19245.00	47.3 PK	74.0	-26.7	1.55 V	167	52.7	-5.4
4	19245.00	37.8 AV	54.0	-16.2	1.55 V	167	43.2	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.1 PK	88.2	-41.1	1.69 H	321	34.9	12.2
2	#13070.00	38.7 AV	68.2	-29.5	1.69 H	321	26.5	12.2
3	19605.00	46.5 PK	74.0	-27.5	2.04 H	182	52.1	-5.6
4	19605.00	36.2 AV	54.0	-17.8	2.04 H	182	41.8	-5.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.3 PK	88.2	-40.9	1.47 V	187	35.1	12.2
2	#13070.00	37.2 AV	68.2	-31.0	1.47 V	187	25.0	12.2
3	19605.00	47.4 PK	74.0	-26.6	1.65 V	154	53.0	-5.6
4	19605.00	37.6 AV	54.0	-16.4	1.65 V	154	43.2	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	47.3 PK	74.0	-26.7	1.77 H	305	33.3	14.0
2	13390.00	38.6 AV	54.0	-15.4	1.77 H	305	24.6	14.0
3	20085.00	46.5 PK	74.0	-27.5	2.05 H	200	51.5	-5.0
4	20085.00	36.3 AV	54.0	-17.7	2.05 H	200	41.3	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.2 PK	74.0	-25.8	1.53 V	191	34.2	14.0
2	13390.00	37.7 AV	54.0	-16.3	1.53 V	191	23.7	14.0
3	20085.00	47.6 PK	74.0	-26.4	1.62 V	151	52.6	-5.0
4	20085.00	38.2 AV	54.0	-15.8	1.62 V	151	43.2	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20 °C, 63 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.2 PK	88.2	-40.0	1.71 H	299	34.5	13.7
2	#13710.00	39.5 AV	68.2	-28.7	1.71 H	299	25.8	13.7
3	20565.00	46.2 PK	74.0	-27.8	2.06 H	192	50.5	-4.3
4	20565.00	35.9 AV	54.0	-18.1	2.06 H	192	40.2	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.2 PK	88.2	-40.0	1.53 V	176	34.5	13.7
2	#13710.00	37.7 AV	68.2	-30.5	1.53 V	176	24.0	13.7
3	20565.00	47.4 PK	74.0	-26.6	1.66 V	164	51.7	-4.3
4	20565.00	37.6 AV	54.0	-16.4	1.66 V	164	41.9	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.5 PK	74.0	-25.5	1.78 H	339	36.3	12.2
2	11970.00	39.7 AV	54.0	-14.3	1.78 H	339	27.5	12.2
3	17955.00	45.7 PK	74.0	-28.3	2.23 H	190	20.2	25.5
4	17955.00	35.6 AV	54.0	-18.4	2.23 H	190	10.1	25.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	47.9 PK	74.0	-26.1	1.46 V	185	35.7	12.2
2	11970.00	37.4 AV	54.0	-16.6	1.46 V	185	25.2	12.2
3	17955.00	47.5 PK	74.0	-26.5	1.53 V	131	22.0	25.5
4	17955.00	37.5 AV	54.0	-16.5	1.53 V	131	12.0	25.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	48.4 PK	88.2	-39.8	1.77 H	340	34.5	13.9
2	#13570.00	39.9 AV	68.2	-28.3	1.77 H	340	26.0	13.9
3	20355.00	45.8 PK	74.0	-28.2	2.18 H	203	50.2	-4.4
4	20355.00	35.6 AV	54.0	-18.4	2.18 H	203	40.0	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	48.0 PK	88.2	-40.2	1.51 V	197	34.1	13.9
2	#13570.00	37.7 AV	68.2	-30.5	1.51 V	197	23.8	13.9
3	20355.00	47.7 PK	74.0	-26.3	1.50 V	132	52.1	-4.4
4	20355.00	37.5 AV	54.0	-16.5	1.50 V	132	41.9	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 20 MHz	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.3 PK	74.0	-25.7	1.82 H	325	36.1	12.2
2	12050.00	39.3 AV	54.0	-14.7	1.82 H	325	27.1	12.2
3	18075.00	45.8 PK	74.0	-28.2	2.21 H	194	51.6	-5.8
4	18075.00	35.8 AV	54.0	-18.2	2.21 H	194	41.6	-5.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	47.7 PK	74.0	-26.3	1.50 V	169	35.5	12.2
2	12050.00	37.2 AV	54.0	-16.8	1.50 V	169	25.0	12.2
3	18075.00	47.4 PK	74.0	-26.6	1.54 V	118	53.2	-5.8
4	18075.00	37.5 AV	54.0	-16.5	1.54 V	118	43.3	-5.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) Punctured by 20 MHz	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.7 PK	74.0	-25.3	1.75 H	342	35.0	13.7
2	13330.00	39.7 AV	54.0	-14.3	1.75 H	342	26.0	13.7
3	19995.00	46.3 PK	74.0	-27.7	2.24 H	181	51.4	-5.1
4	19995.00	36.0 AV	54.0	-18.0	2.24 H	181	41.1	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	47.2 PK	74.0	-26.8	1.44 V	194	33.5	13.7
2	13330.00	36.6 AV	54.0	-17.4	1.44 V	194	22.9	13.7
3	19995.00	48.0 PK	74.0	-26.0	1.56 V	146	53.1	-5.1
4	19995.00	38.5 AV	54.0	-15.5	1.56 V	146	43.6	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	48.3 PK	74.0	-25.7	1.75 H	339	36.1	12.2
2	12050.00	39.5 AV	54.0	-14.5	1.75 H	339	27.3	12.2
3	18075.00	46.2 PK	74.0	-27.8	2.17 H	179	52.0	-5.8
4	18075.00	35.9 AV	54.0	-18.1	2.17 H	179	41.7	-5.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	47.0 PK	74.0	-27.0	1.44 V	181	34.8	12.2
2	12050.00	36.5 AV	54.0	-17.5	1.44 V	181	24.3	12.2
3	18075.00	48.1 PK	74.0	-25.9	1.56 V	162	53.9	-5.8
4	18075.00	38.7 AV	54.0	-15.3	1.56 V	162	44.5	-5.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.3 PK	74.0	-25.7	1.82 H	323	34.6	13.7
2	13330.00	39.3 AV	54.0	-14.7	1.82 H	323	25.6	13.7
3	19995.00	45.5 PK	74.0	-28.5	2.18 H	183	50.6	-5.1
4	19995.00	35.7 AV	54.0	-18.3	2.18 H	183	40.8	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	46.8 PK	74.0	-27.2	1.47 V	205	33.1	13.7
2	13330.00	36.3 AV	54.0	-17.7	1.47 V	205	22.6	13.7
3	19995.00	47.8 PK	74.0	-26.2	1.57 V	159	52.9	-5.1
4	19995.00	38.4 AV	54.0	-15.6	1.57 V	159	43.5	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT320) Punctured by 40 MHz	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	48.2 PK	74.0	-25.8	1.75 H	354	36.4	11.8
2	12530.00	39.5 AV	54.0	-14.5	1.75 H	354	27.7	11.8
3	18795.00	45.7 PK	74.0	-28.3	2.28 H	197	51.4	-5.7
4	18795.00	35.8 AV	54.0	-18.2	2.28 H	197	41.5	-5.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	47.5 PK	74.0	-26.5	1.49 V	193	35.7	11.8
2	12530.00	37.1 AV	54.0	-16.9	1.49 V	193	25.3	11.8
3	18795.00	48.0 PK	74.0	-26.0	1.50 V	160	53.7	-5.7
4	18795.00	38.6 AV	54.0	-15.4	1.50 V	160	44.3	-5.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT320) Punctured by 80 MHz	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	48.9 PK	74.0	-25.1	1.73 H	353	37.1	11.8
2	12530.00	39.9 AV	54.0	-14.1	1.73 H	353	28.1	11.8
3	18795.00	45.2 PK	74.0	-28.8	2.28 H	176	50.9	-5.7
4	18795.00	35.4 AV	54.0	-18.6	2.28 H	176	41.1	-5.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	47.4 PK	74.0	-26.6	1.43 V	198	35.6	11.8
2	12530.00	36.6 AV	54.0	-17.4	1.43 V	198	24.8	11.8
3	18795.00	47.6 PK	74.0	-26.4	1.52 V	131	53.3	-5.7
4	18795.00	38.0 AV	54.0	-16.0	1.52 V	131	43.7	-5.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT320) Punctured by 80+40 MHz	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	48.4 PK	74.0	-25.6	1.73 H	346	36.6	11.8
2	12530.00	39.9 AV	54.0	-14.1	1.73 H	346	28.1	11.8
3	18795.00	46.0 PK	74.0	-28.0	2.23 H	191	51.7	-5.7
4	18795.00	35.8 AV	54.0	-18.2	2.23 H	191	41.5	-5.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12530.00	47.4 PK	74.0	-26.6	1.42 V	196	35.6	11.8
2	12530.00	36.9 AV	54.0	-17.1	1.42 V	196	25.1	11.8
3	18795.00	47.8 PK	74.0	-26.2	1.54 V	143	53.5	-5.7
4	18795.00	38.4 AV	54.0	-15.6	1.54 V	143	44.1	-5.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---