



|                          |                  |             |                  |
|--------------------------|------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT20) | Channel     | CH 45 : 6175 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz   | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 63% RH     | Tested By   | JyunChun.Lin     |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5443.68         | 37.63 PK                | 74             | -36.37      | -72.29                  | -66.91                  | 8.17                   | -57.63           |
| 2                            | 5443.68         | 26.8 AV                 | 54             | -27.2       | -80.5                   | -78.91                  | 8.17                   | -68.46           |
| 3                            | 8233.16         | 38.66 PK                | 74             | -35.34      | -67.62                  | -67.95                  | 8.17                   | -56.6            |
| 4                            | 8233.16         | 30.7 AV                 | 54             | -23.3       | -74.65                  | -77.21                  | 8.17                   | -64.56           |
| 5                            | 18954.7         | 35.42 PK                | 74             | -38.58      | -71.27                  | -70.79                  | 8.17                   | -59.84           |
| 6                            | 18954.7         | 28.44 AV                | 54             | -25.56      | -77.05                  | -79.22                  | 8.17                   | -66.82           |
| 7                            | 23845.6         | 43.4 PK                 | 74             | -30.6       | -64.88                  | -61.76                  | 8.17                   | -51.86           |
| 8                            | 23845.6         | 30.27 AV                | 54             | -23.73      | -75.38                  | -77.12                  | 8.17                   | -64.99           |
| 9                            | 39145.42        | 34.58 PK                | 74             | -39.42      | -73.73                  | -70.56                  | 8.17                   | -60.68           |
| 10                           | 39145.42        | 26.44 AV                | 54             | -27.56      | -81.33                  | -78.98                  | 8.17                   | -68.82           |

Note: Margin value = Emission Level - Limit value

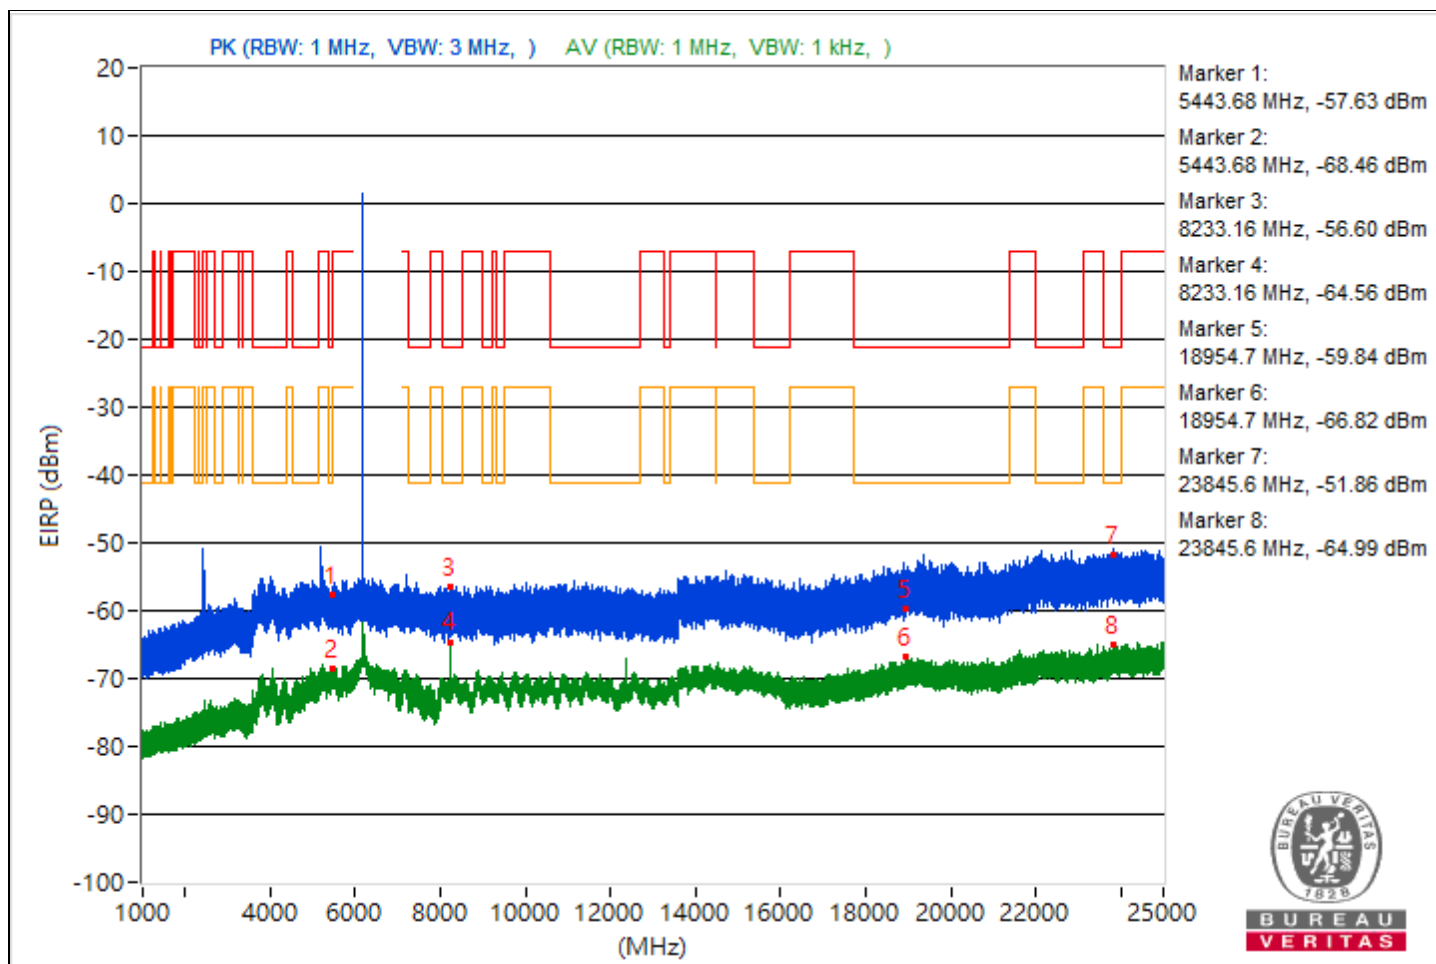


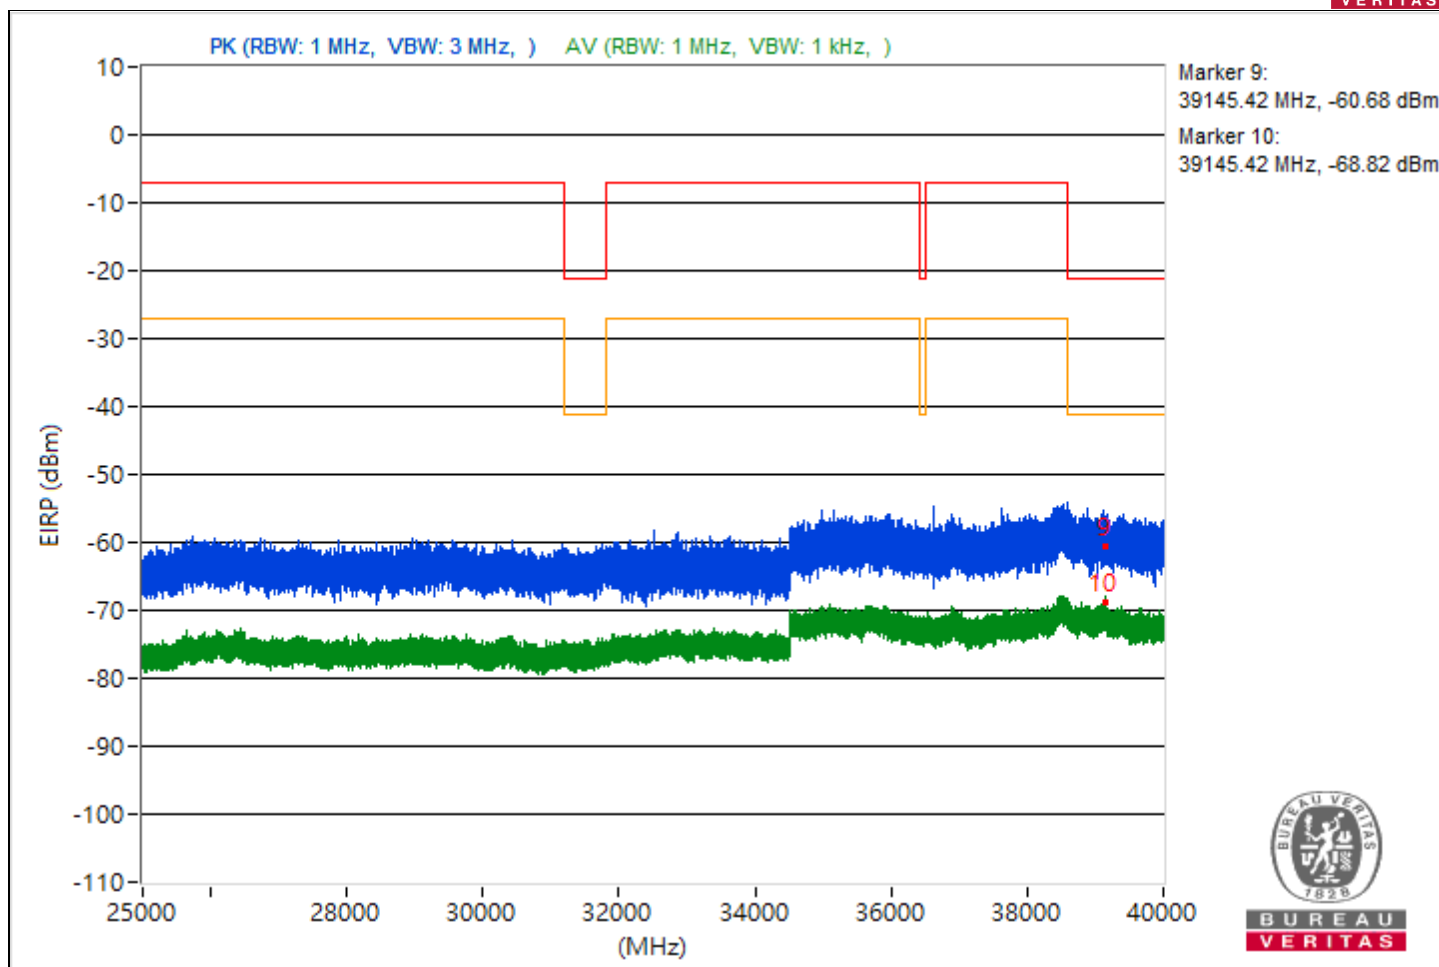


|                          |                  |             |                  |
|--------------------------|------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT20) | Channel     | CH 93 : 6415 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz   | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 63% RH     | Tested By   | JyunChun.Lin     |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4976.7          | 34.09 PK                | 74             | -39.91      | -72.74                  | -72                     | 8.17                   | -61.17           |
| 2                            | 4976.7          | 25.92 AV                | 54             | -28.08      | -79.29                  | -82.23                  | 8.17                   | -69.34           |
| 3                            | 14482.76        | 34.79 PK                | 74             | -39.21      | -71.88                  | -71.43                  | 8.17                   | -60.47           |
| 4                            | 14482.76        | 26.54 AV                | 54             | -27.46      | -78.76                  | -81.44                  | 8.17                   | -68.72           |
| 5                            | 19382.2         | 38.53 PK                | 74             | -35.47      | -67.44                  | -68.44                  | 8.17                   | -56.73           |
| 6                            | 19382.2         | 28 AV                   | 54             | -26         | -76.85                  | -80.96                  | 8.17                   | -67.26           |
| 7                            | 23837.5         | 40.82 PK                | 74             | -33.18      | -66.25                  | -65.07                  | 8.17                   | -54.44           |
| 8                            | 23837.5         | 29.5 AV                 | 54             | -24.5       | -75.65                  | -78.79                  | 8.17                   | -65.76           |
| 9                            | 39072.71        | 33.1 PK                 | 74             | -40.9       | -72.05                  | -75.18                  | 8.17                   | -62.16           |
| 10                           | 39072.71        | 26.97 AV                | 54             | -27.03      | -80.99                  | -78.34                  | 8.17                   | -68.29           |

Note: Margin value = Emission Level - Limit value

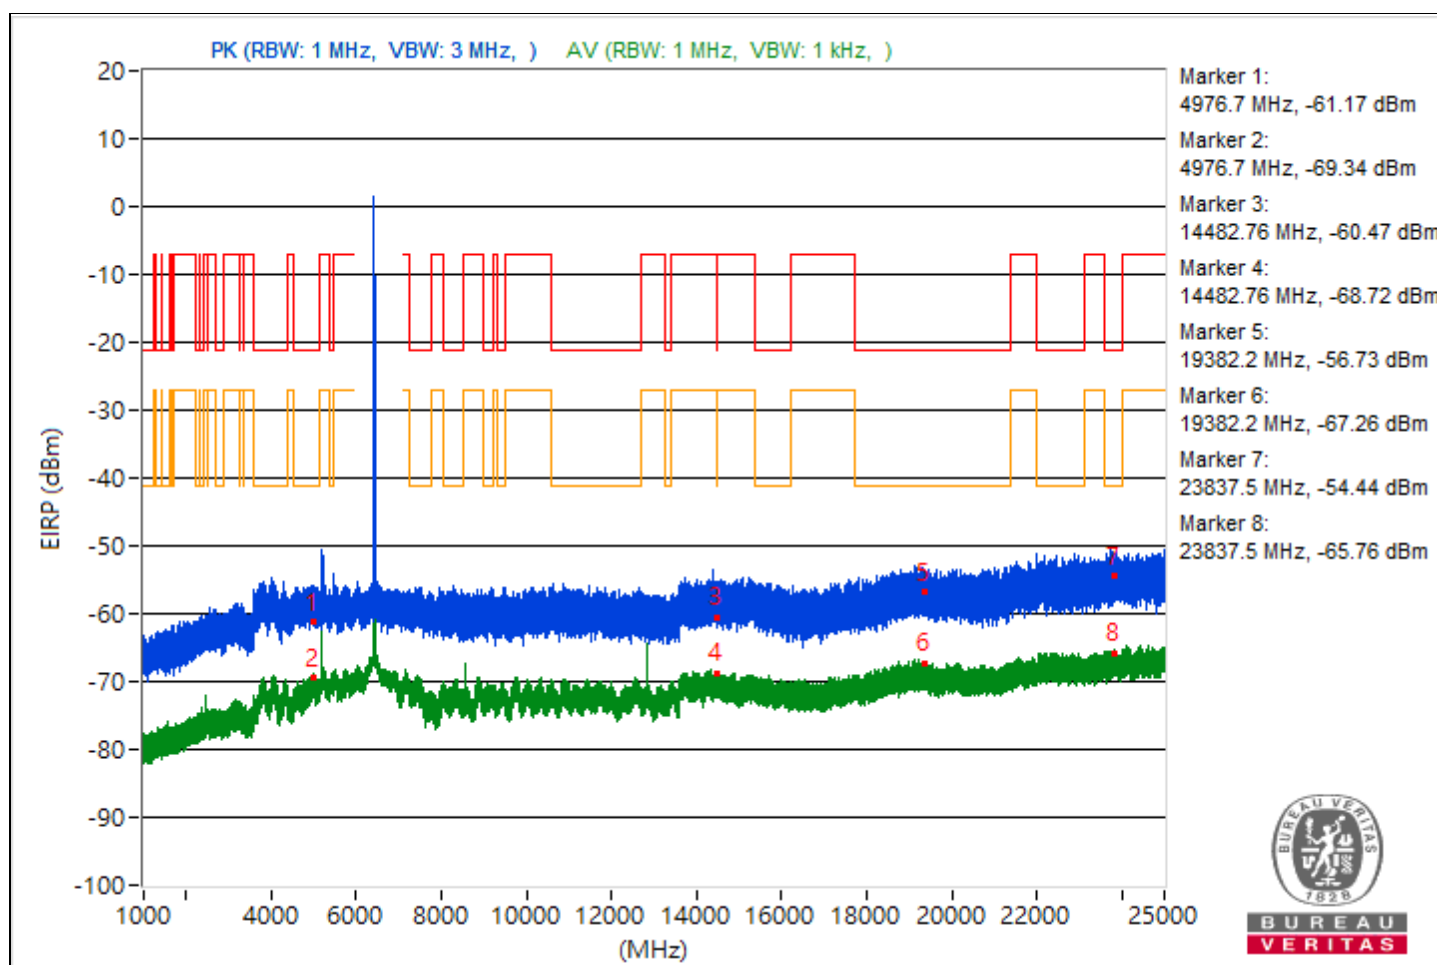


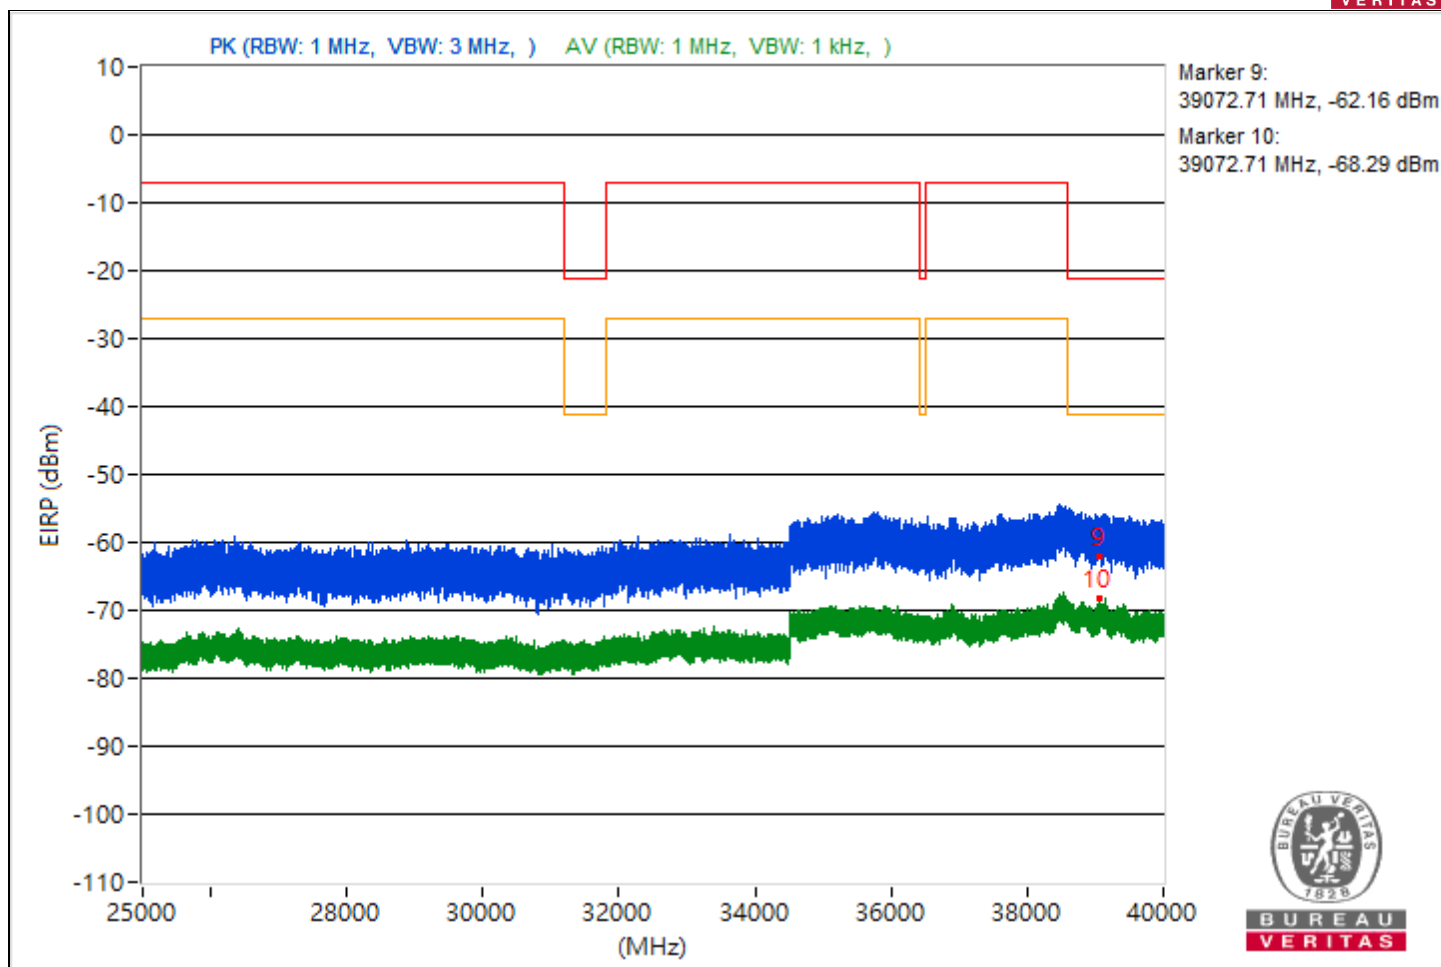


|                          |                  |             |                   |
|--------------------------|------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT20) | Channel     | CH 117 : 6535 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz   | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH     | Tested By   | JyunChun.Lin      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5436.52         | 35.45 PK                | 74             | -38.55      | -72.79                  | -69.72                  | 8.17                   | -59.81           |
| 2                            | 5436.52         | 26.45 AV                | 54             | -27.55      | -79.04                  | -81.21                  | 8.17                   | -68.81           |
| 3                            | 14475.73        | 33.77 PK                | 74             | -40.23      | -73.16                  | -72.24                  | 8.17                   | -61.49           |
| 4                            | 14475.73        | 25.81 AV                | 54             | -28.19      | -81.79                  | -79.71                  | 8.17                   | -69.45           |
| 5                            | 19352.8         | 38.93 PK                | 74             | -35.07      | -68.31                  | -66.84                  | 8.17                   | -56.33           |
| 6                            | 19352.8         | 28.11 AV                | 54             | -25.89      | -77.04                  | -80.17                  | 8.17                   | -67.15           |
| 7                            | 23855.6         | 38.44 PK                | 74             | -35.56      | -67.09                  | -69.15                  | 8.17                   | -56.82           |
| 8                            | 23855.6         | 30.43 AV                | 54             | -23.57      | -76.65                  | -75.46                  | 8.17                   | -64.83           |
| 9                            | 38612.18        | 36.32 PK                | 74             | -37.68      | -72.27                  | -68.69                  | 8.17                   | -58.94           |
| 10                           | 38612.18        | 26.98 AV                | 54             | -27.02      | -80.36                  | -78.71                  | 8.17                   | -68.28           |

Note: Margin value = Emission Level - Limit value

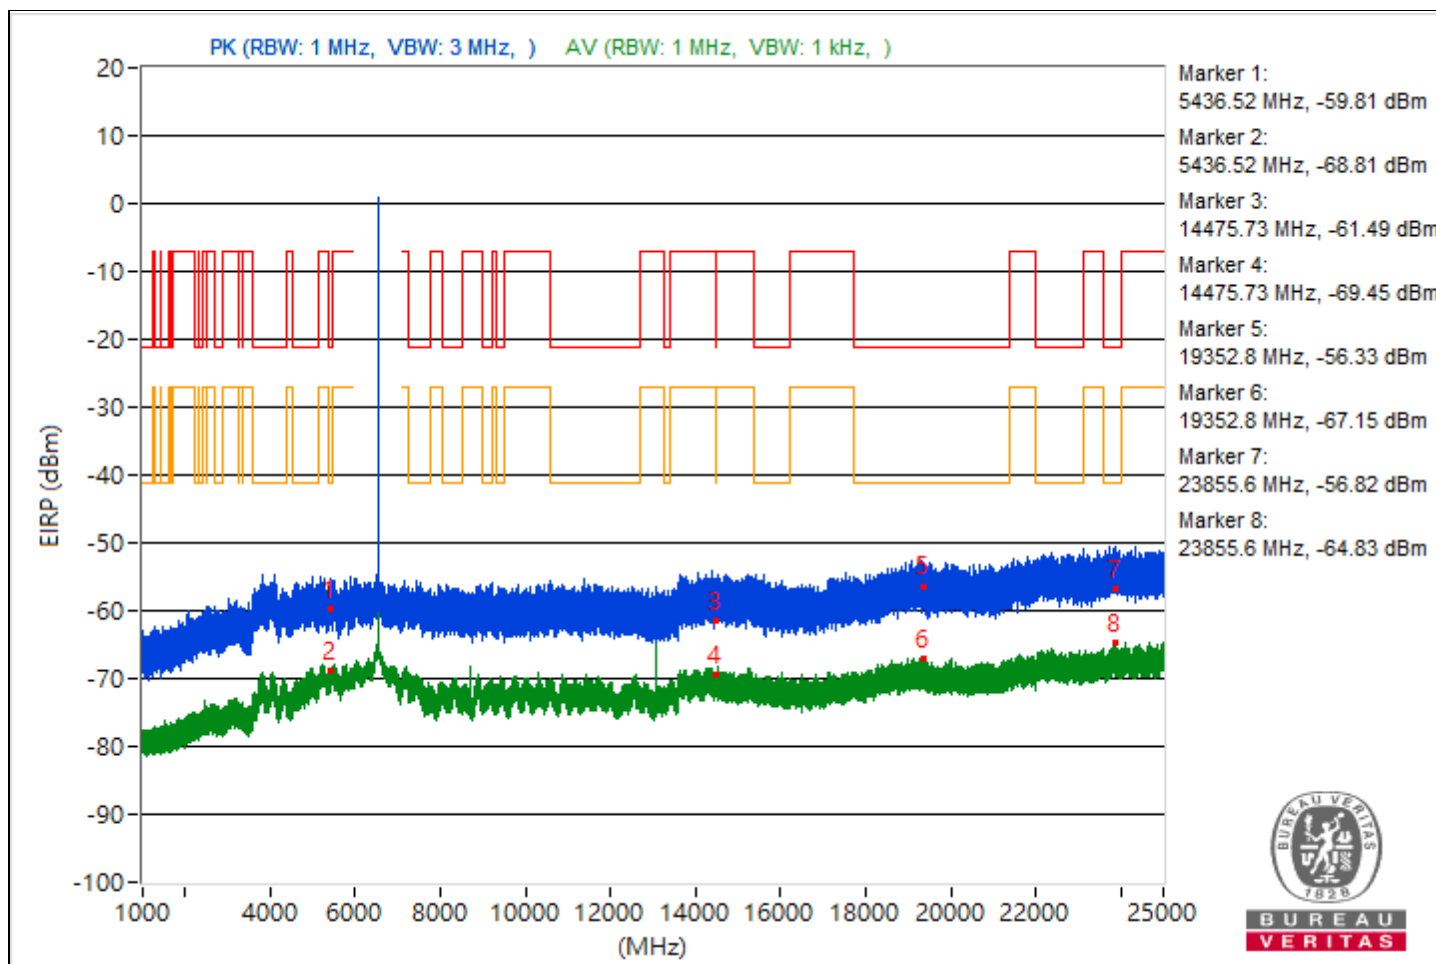


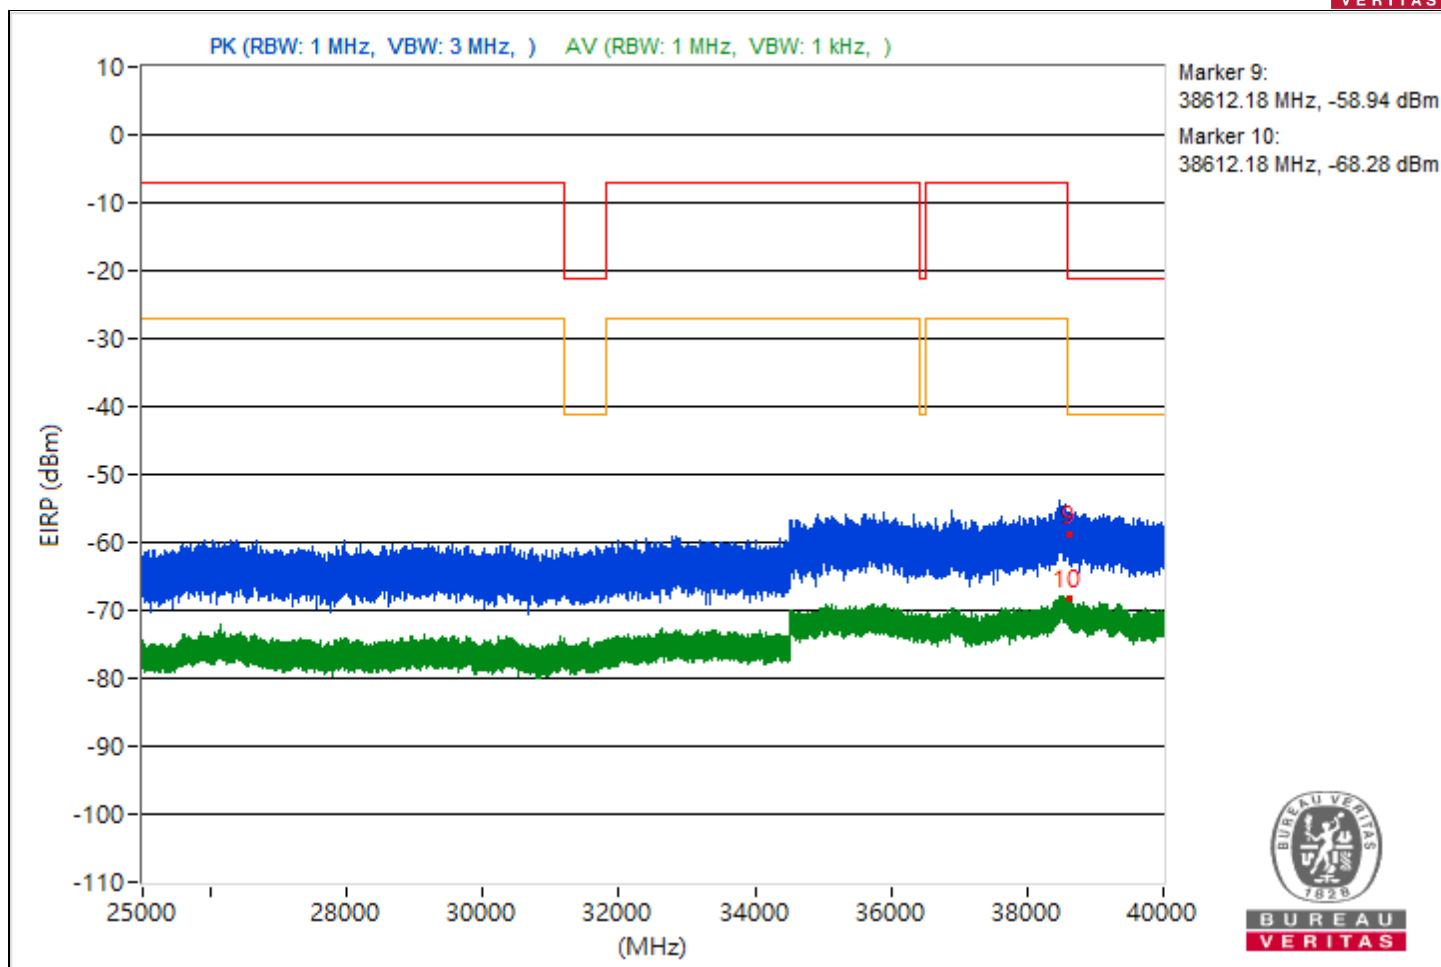


|                          |                  |             |                   |
|--------------------------|------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT20) | Channel     | CH 149 : 6695 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz   | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH     | Tested By   | JyunChun.Lin      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3805.76         | 36.79 PK                | 74             | -37.21      | -71.09                  | -68.57                  | 8.17                   | -58.47           |
| 2                            | 3805.76         | 26.58 AV                | 54             | -27.42      | -81.36                  | -78.75                  | 8.17                   | -68.68           |
| 3                            | 13389.87        | 39.95 PK                | 74             | -34.05      | -69.29                  | -64.8                   | 8.17                   | -55.31           |
| 4                            | 13389.87        | 36.96 AV                | 54             | -17.04      | -75.94                  | -66.99                  | 8.17                   | -58.3            |
| 5                            | 21389.8         | 40.39 PK                | 74             | -33.61      | -66.28                  | -65.84                  | 8.17                   | -54.87           |
| 6                            | 21389.8         | 27.86 AV                | 54             | -26.14      | -76.84                  | -81.56                  | 8.17                   | -67.4            |
| 7                            | 23838.9         | 43.33 PK                | 74             | -30.67      | -62.68                  | -63.6                   | 8.17                   | -51.93           |
| 8                            | 23838.9         | 30.5 AV                 | 54             | -23.5       | -75                     | -77.15                  | 8.17                   | -64.76           |
| 9                            | 38608.8         | 37.76 PK                | 74             | -36.24      | -70.04                  | -67.65                  | 8.17                   | -57.5            |
| 10                           | 38608.8         | 26.65 AV                | 54             | -27.35      | -78.57                  | -81.5                   | 8.17                   | -68.61           |

Note: Margin value = Emission Level - Limit value

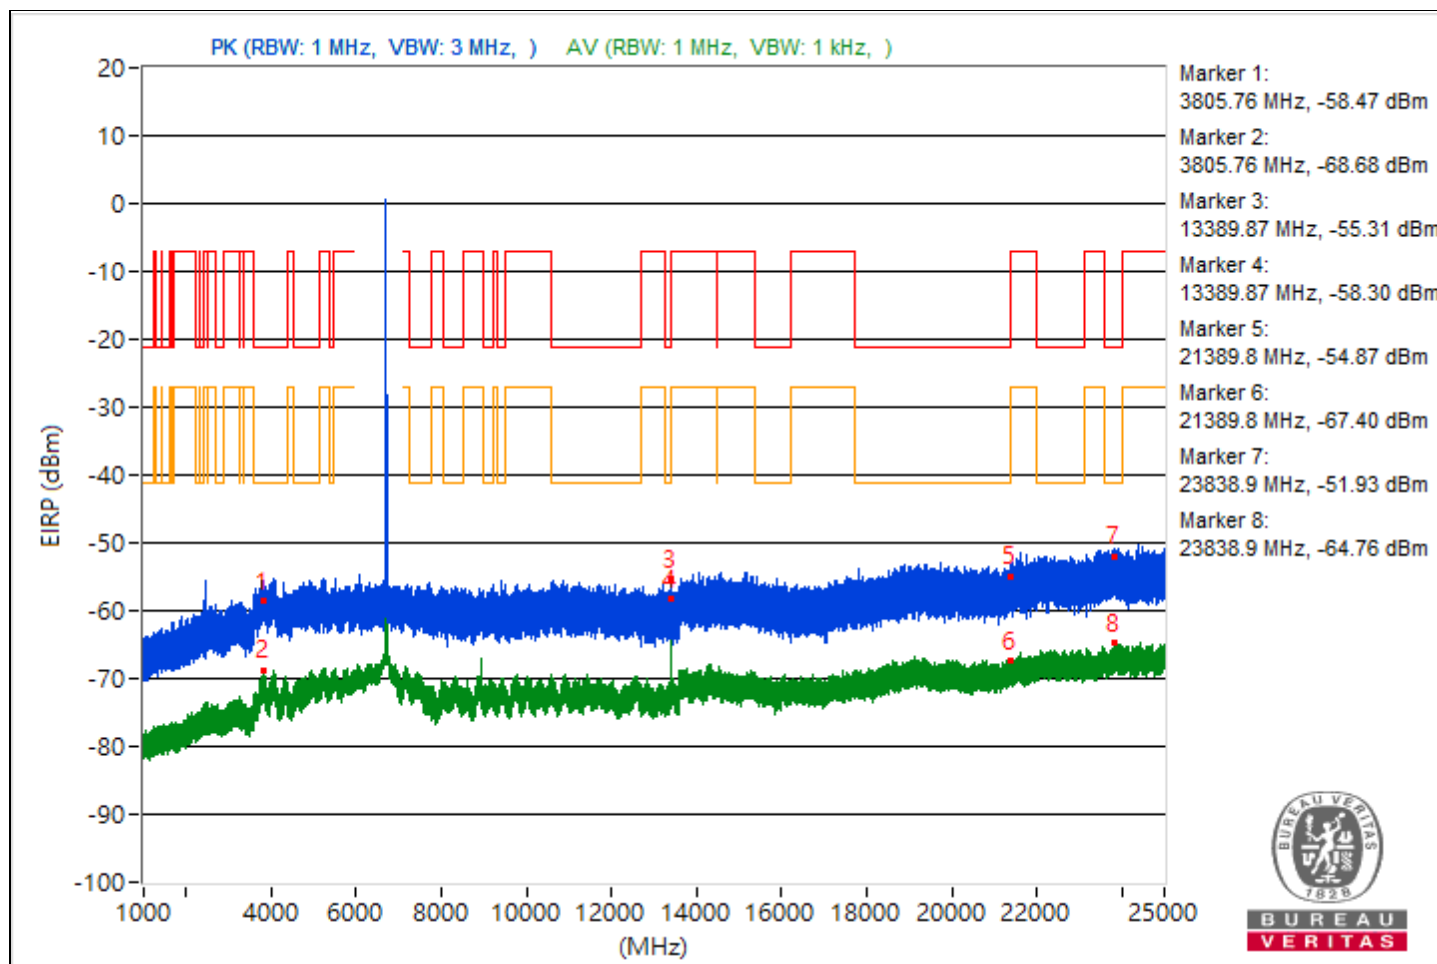

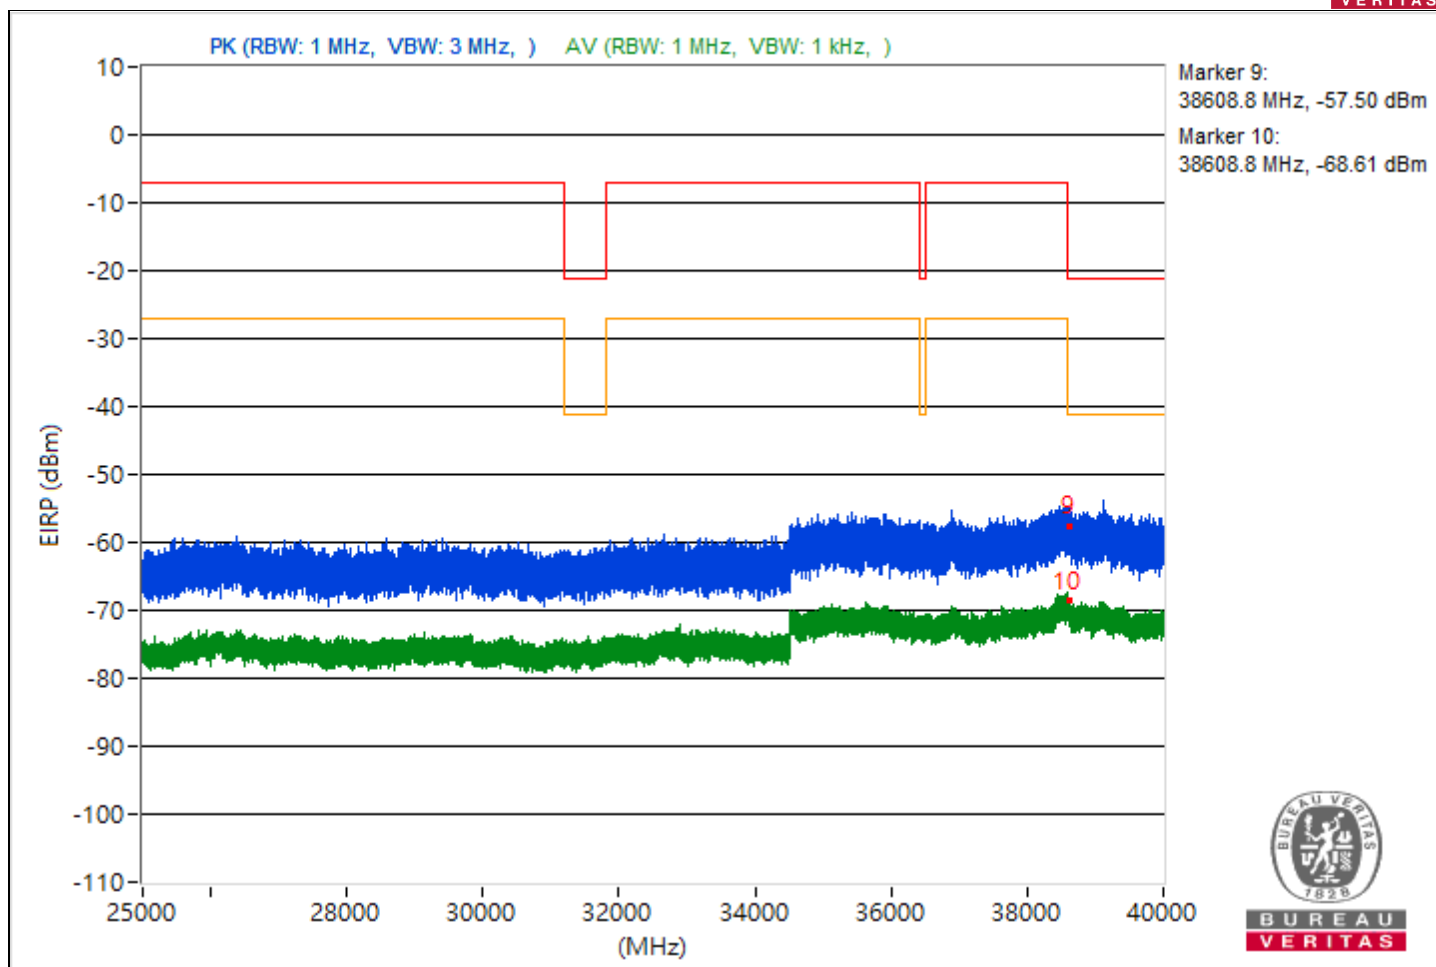





|                          |                  |             |                   |
|--------------------------|------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT20) | Channel     | CH 181 : 6855 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz   | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH     | Tested By   | JyunChun.Lin      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3789.73         | 37 PK                   | 74             | -37         | -71.47                  | -68.06                  | 8.17                   | -58.26           |
| 2                            | 3789.73         | 26 AV                   | 54             | -28         | -79.31                  | -81.98                  | 8.17                   | -69.26           |
| 3                            | 8225.96         | 37.32 PK                | 74             | -36.68      | -70.54                  | -68.06                  | 8.17                   | -57.94           |
| 4                            | 8225.96         | 30.43 AV                | 54             | -23.57      | -77.04                  | -75.18                  | 8.17                   | -64.83           |
| 5                            | 19406.1         | 37.41 PK                | 74             | -36.59      | -72.68                  | -67.07                  | 8.17                   | -57.85           |
| 6                            | 19406.1         | 28.55 AV                | 54             | -25.45      | -76.95                  | -79.11                  | 8.17                   | -66.71           |
| 7                            | 23751.9         | 39.92 PK                | 74             | -34.08      | -68.74                  | -65.05                  | 8.17                   | -55.34           |
| 8                            | 23751.9         | 29.78 AV                | 54             | -24.22      | -75.09                  | -79.15                  | 8.17                   | -65.48           |
| 9                            | 38849.42        | 36.11 PK                | 74             | -37.89      | -70.85                  | -69.87                  | 8.17                   | -59.15           |
| 10                           | 38849.42        | 26.74 AV                | 54             | -27.26      | -80.73                  | -78.86                  | 8.17                   | -68.52           |

Note: Margin value = Emission Level - Limit value

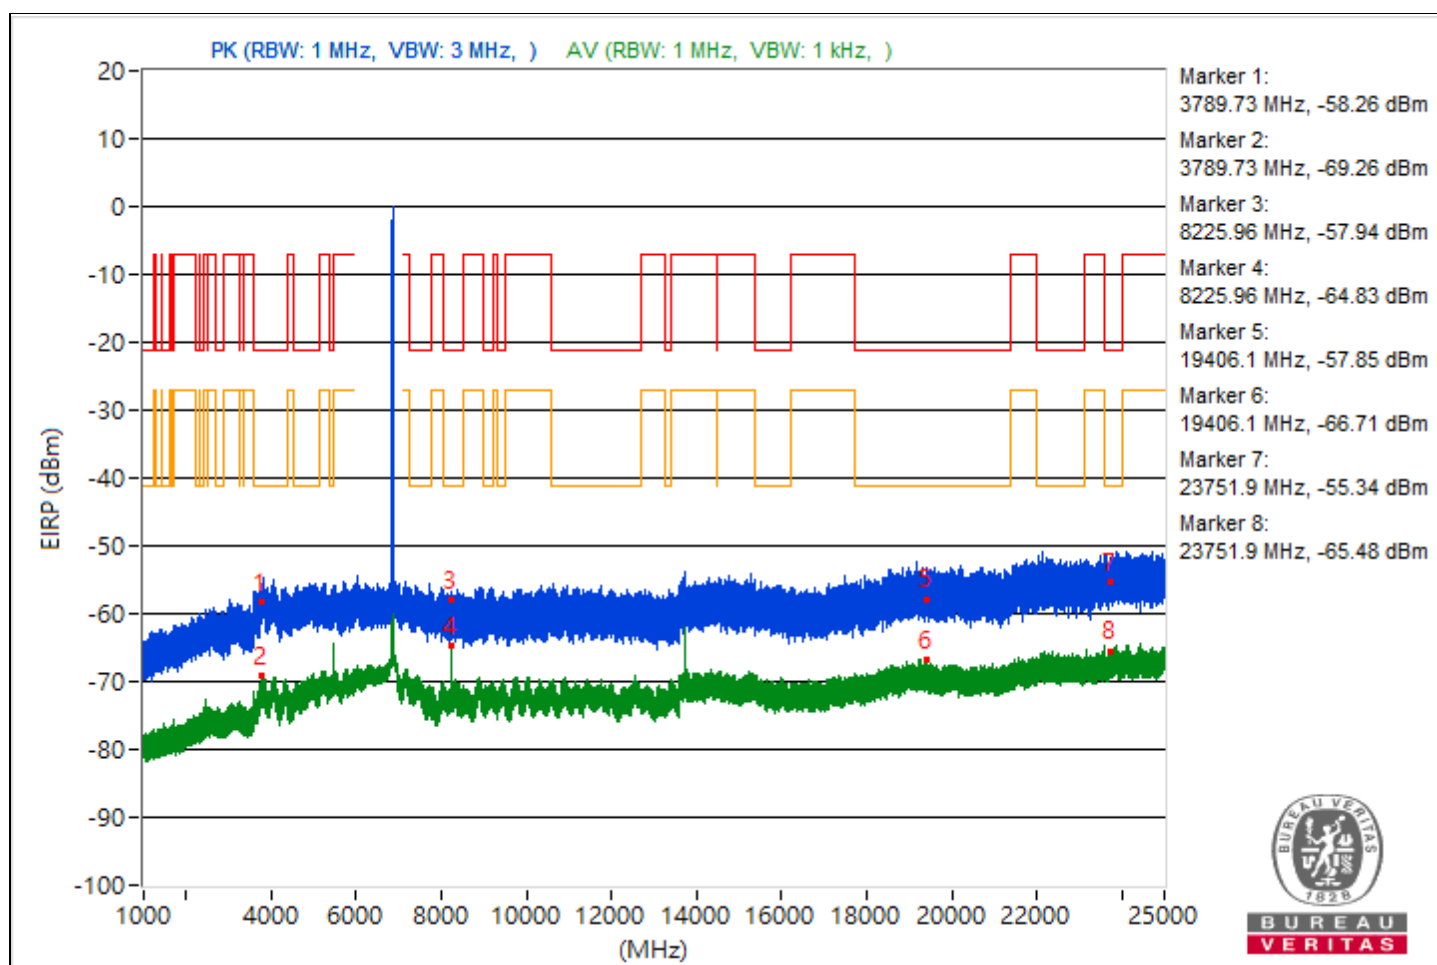


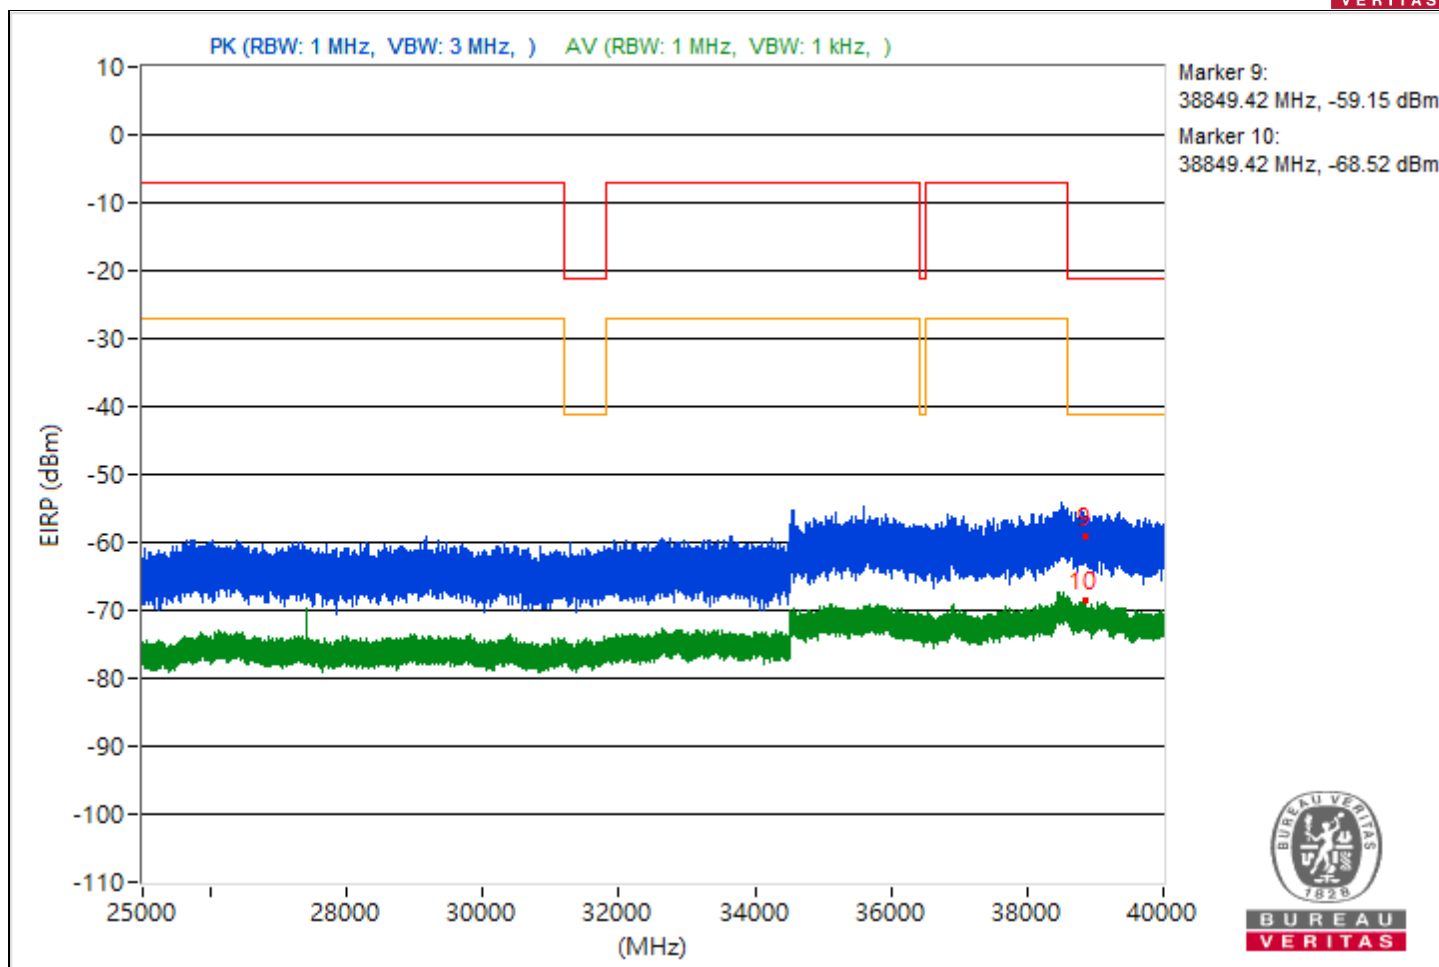


|                          |                  |             |                 |
|--------------------------|------------------|-------------|-----------------|
| RF Mode                  | 802.11be (EHT40) | Channel     | CH 3 : 5965 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz   | Input Power | 3.3 Vdc         |
| Environmental Conditions | 24°C, 63% RH     | Tested By   | JyunChun.Lin    |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5447.49         | 37.34 PK                | 74             | -36.66      | -71.29                  | -67.65                  | 8.17                   | -57.92           |
| 2                            | 5447.49         | 29.13 AV                | 54             | -24.87      | -77.13                  | -77.49                  | 8.17                   | -66.13           |
| 3                            | 7441.32         | 36.27 PK                | 74             | -37.73      | -69.05                  | -71.7                   | 8.17                   | -58.99           |
| 4                            | 7441.32         | 26.36 AV                | 54             | -27.64      | -78.55                  | -82.45                  | 8.17                   | -68.9            |
| 5                            | 19093.7         | 36.42 PK                | 74             | -37.58      | -69.83                  | -70.23                  | 8.17                   | -58.84           |
| 6                            | 19093.7         | 28.14 AV                | 54             | -25.86      | -79.91                  | -77.13                  | 8.17                   | -67.12           |
| 7                            | 23892.6         | 40.65 PK                | 74             | -33.35      | -65.74                  | -65.85                  | 8.17                   | -54.61           |
| 8                            | 23892.6         | 29.41 AV                | 54             | -24.59      | -75.52                  | -79.36                  | 8.17                   | -65.85           |
| 9                            | 38830.76        | 34.73 PK                | 74             | -39.27      | -73.01                  | -70.72                  | 8.17                   | -60.53           |
| 10                           | 38830.76        | 26.7 AV                 | 54             | -27.3       | -79.12                  | -80.47                  | 8.17                   | -68.56           |

Note: Margin value = Emission Level - Limit value

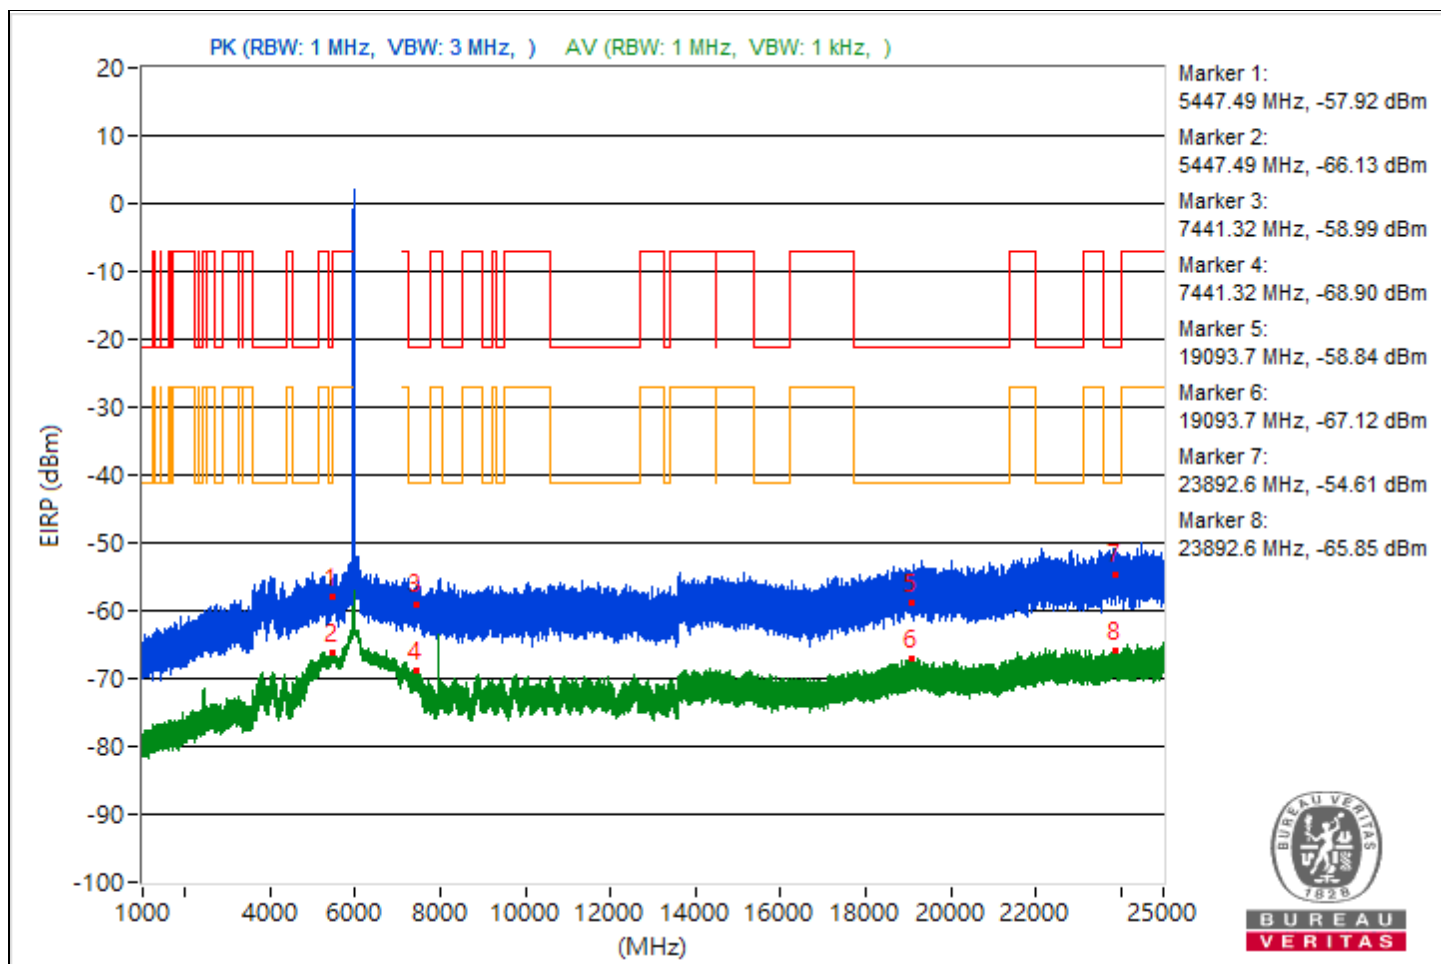


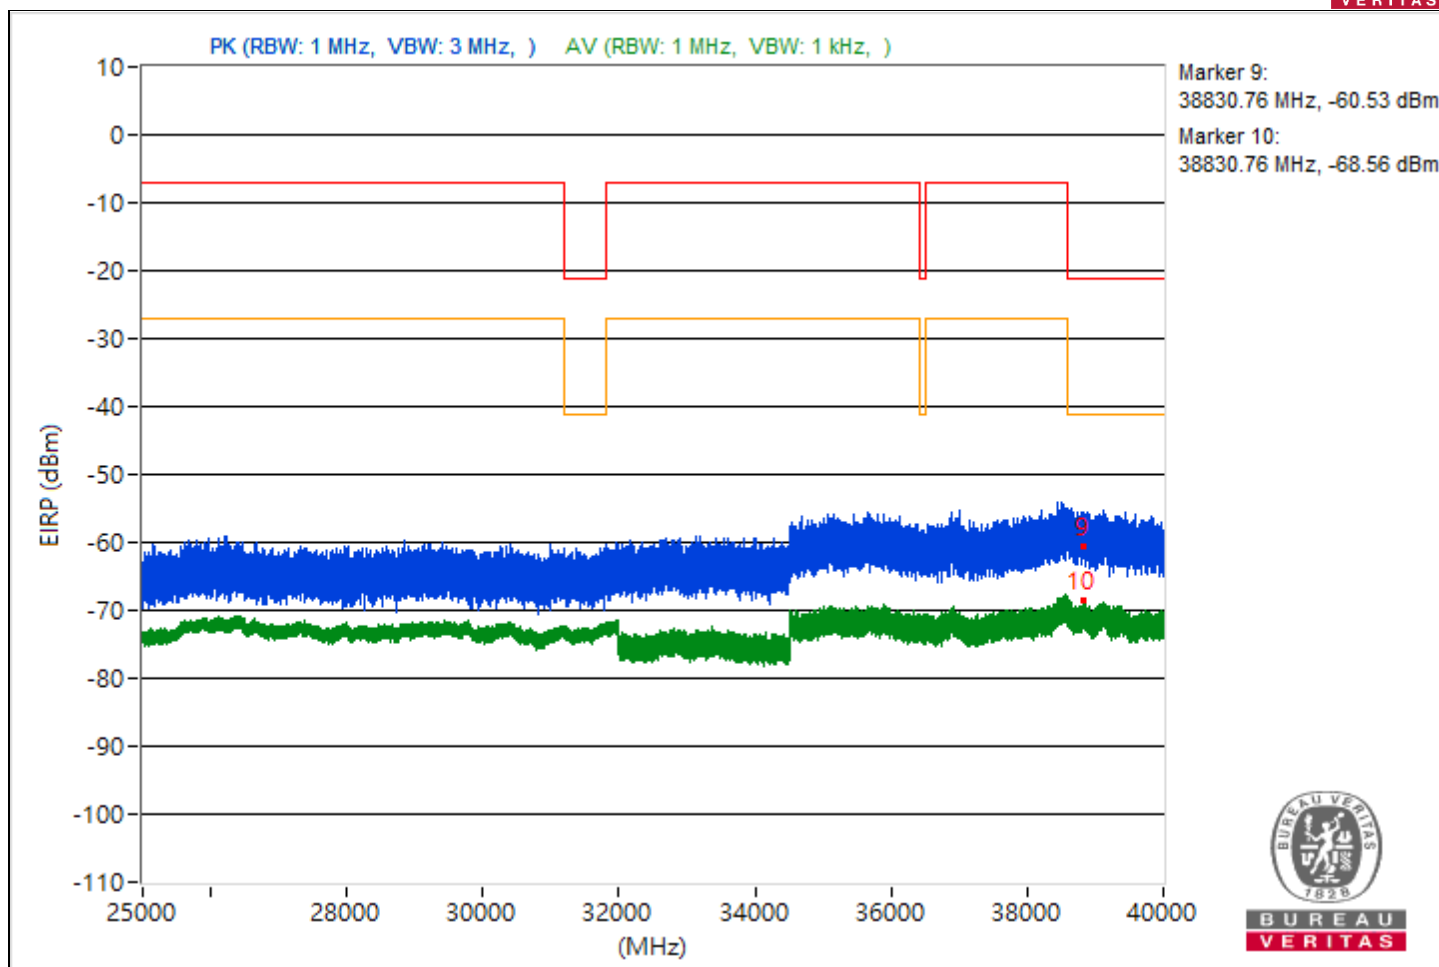


|                          |                  |             |                  |
|--------------------------|------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT40) | Channel     | CH 43 : 6165 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz   | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 63% RH     | Tested By   | JyunChun.Lin     |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5459.31         | 36.24 PK                | 74             | -37.76      | -70.17                  | -70.23                  | 8.17                   | -59.02           |
| 2                            | 5459.31         | 28.2 AV                 | 54             | -25.8       | -77.48                  | -79.15                  | 8.17                   | -67.06           |
| 3                            | 8219.82         | 37.49 PK                | 74             | -36.51      | -69.77                  | -68.27                  | 8.17                   | -57.77           |
| 4                            | 8219.82         | 30.32 AV                | 54             | -23.68      | -74.95                  | -77.73                  | 8.17                   | -64.94           |
| 5                            | 19262.8         | 39.5 PK                 | 74             | -34.5       | -66.95                  | -66.92                  | 8.17                   | -55.76           |
| 6                            | 19262.8         | 27.87 AV                | 54             | -26.13      | -77.22                  | -80.54                  | 8.17                   | -67.39           |
| 7                            | 23835.5         | 42.07 PK                | 74             | -31.93      | -63.12                  | -66.13                  | 8.17                   | -53.19           |
| 8                            | 23835.5         | 29.48 AV                | 54             | -24.52      | -78.37                  | -75.9                   | 8.17                   | -65.78           |
| 9                            | 38612           | 38.53 PK                | 74             | -35.47      | -66.77                  | -69.47                  | 8.17                   | -56.73           |
| 10                           | 38612           | 26.83 AV                | 54             | -27.17      | -78.53                  | -81.04                  | 8.17                   | -68.43           |

Note: Margin value = Emission Level - Limit value

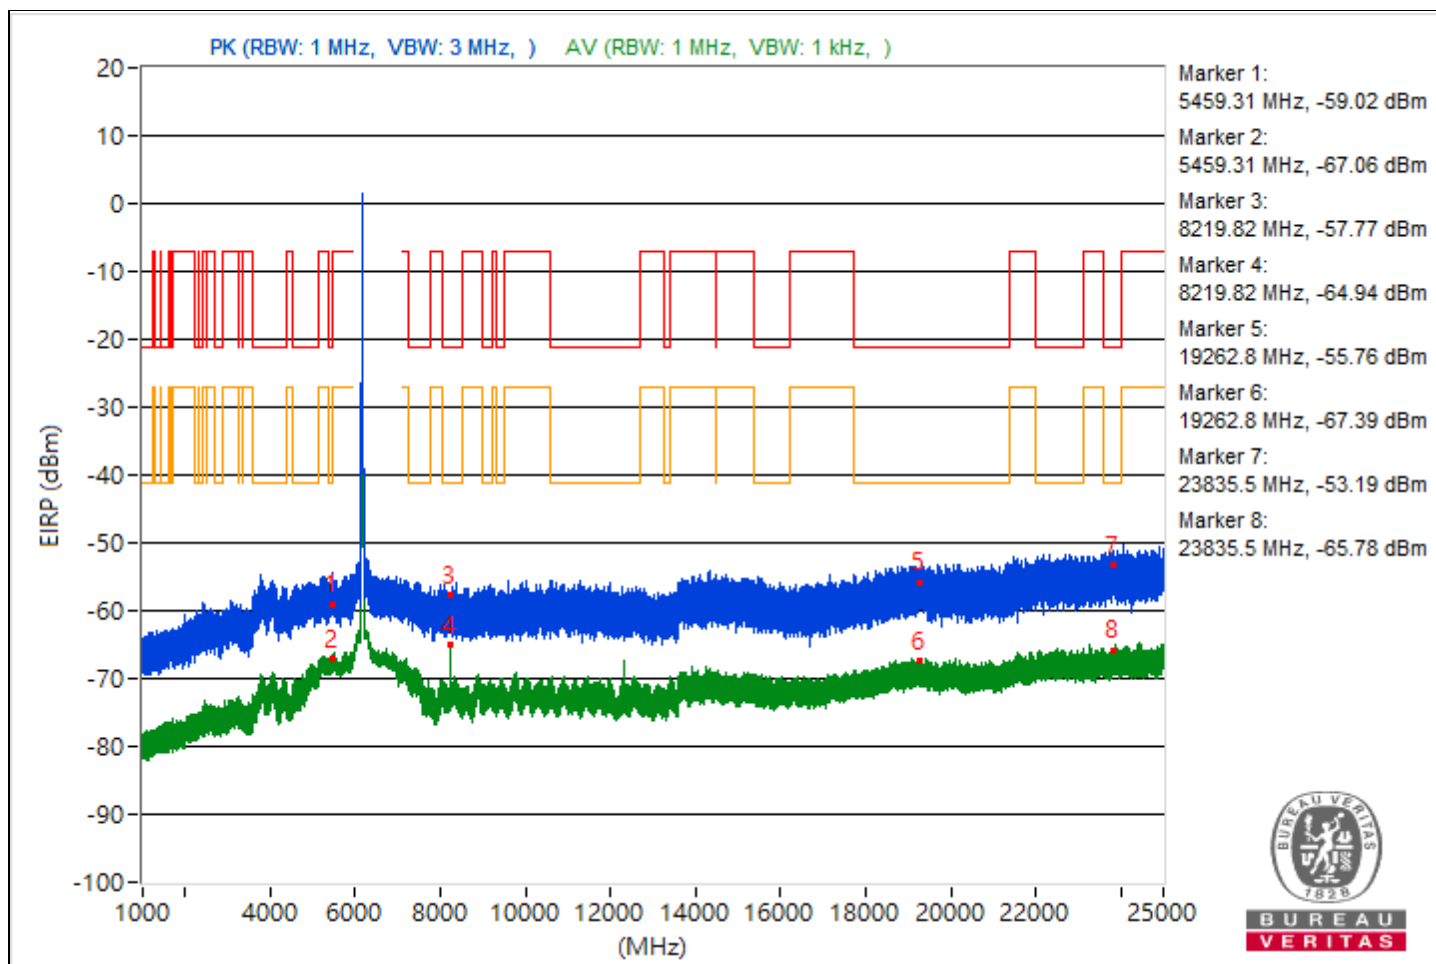


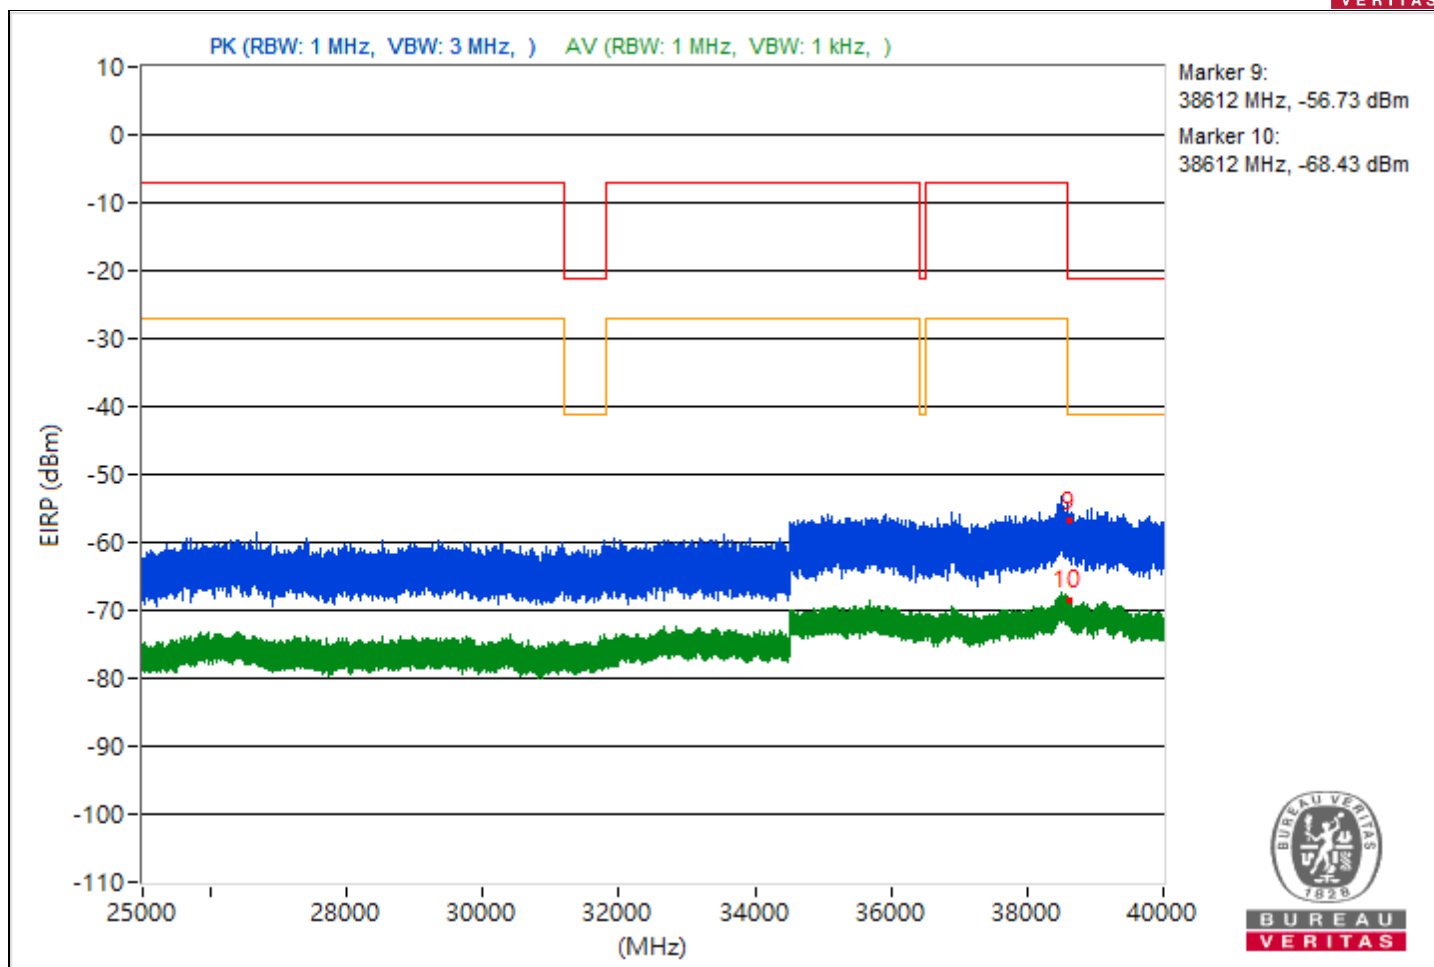


|                          |                  |             |                  |
|--------------------------|------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT40) | Channel     | CH 91 : 6405 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz   | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 63% RH     | Tested By   | JyunChun.Lin     |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5451.14         | 37.85 PK                | 74             | -36.15      | -67.61                  | -69.85                  | 8.17                   | -57.41           |
| 2                            | 5451.14         | 27.78 AV                | 54             | -26.22      | -77.74                  | -79.83                  | 8.17                   | -67.48           |
| 3                            | 7409.67         | 36.92 PK                | 74             | -37.08      | -69.62                  | -69.42                  | 8.17                   | -58.34           |
| 4                            | 7409.67         | 27.22 AV                | 54             | -26.78      | -77.44                  | -82.3                   | 8.17                   | -68.04           |
| 5                            | 19127.4         | 38.64 PK                | 74             | -35.36      | -67.14                  | -68.57                  | 8.17                   | -56.62           |
| 6                            | 19127.4         | 28.17 AV                | 54             | -25.83      | -79.8                   | -77.14                  | 8.17                   | -67.09           |
| 7                            | 23826.1         | 41.27 PK                | 74             | -32.73      | -66.67                  | -64.06                  | 8.17                   | -53.99           |
| 8                            | 23826.1         | 29.87 AV                | 54             | -24.13      | -75.04                  | -78.95                  | 8.17                   | -65.39           |
| 9                            | 38608.09        | 35.25 PK                | 74             | -38.75      | -70.97                  | -71.43                  | 8.17                   | -60.01           |
| 10                           | 38608.09        | 25.99 AV                | 54             | -28.01      | -83.67                  | -78.62                  | 8.17                   | -69.27           |

Note: Margin value = Emission Level - Limit value

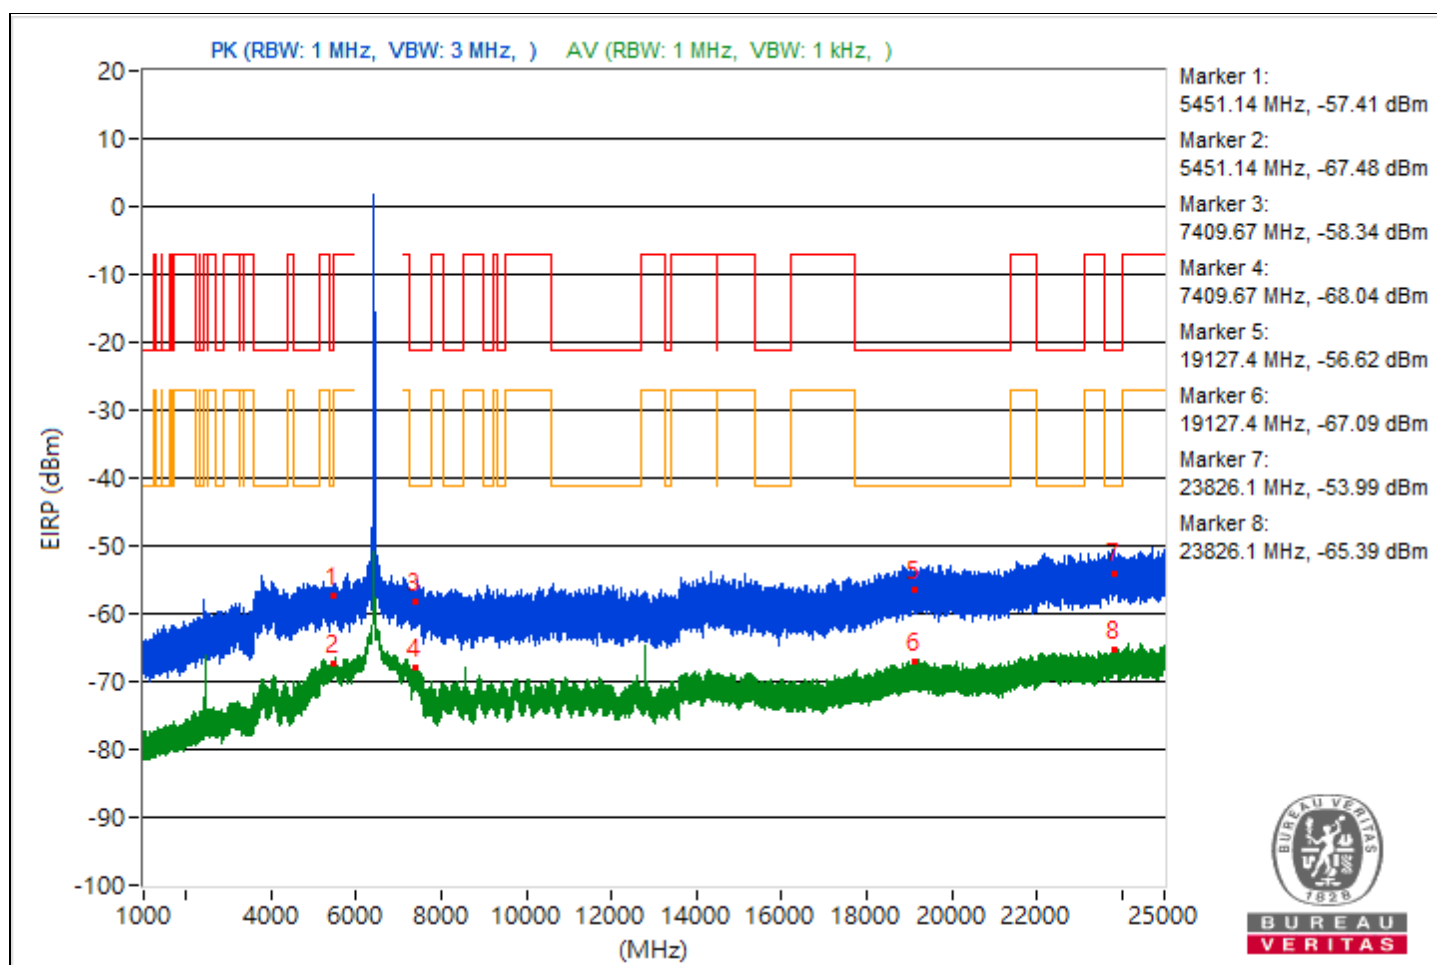

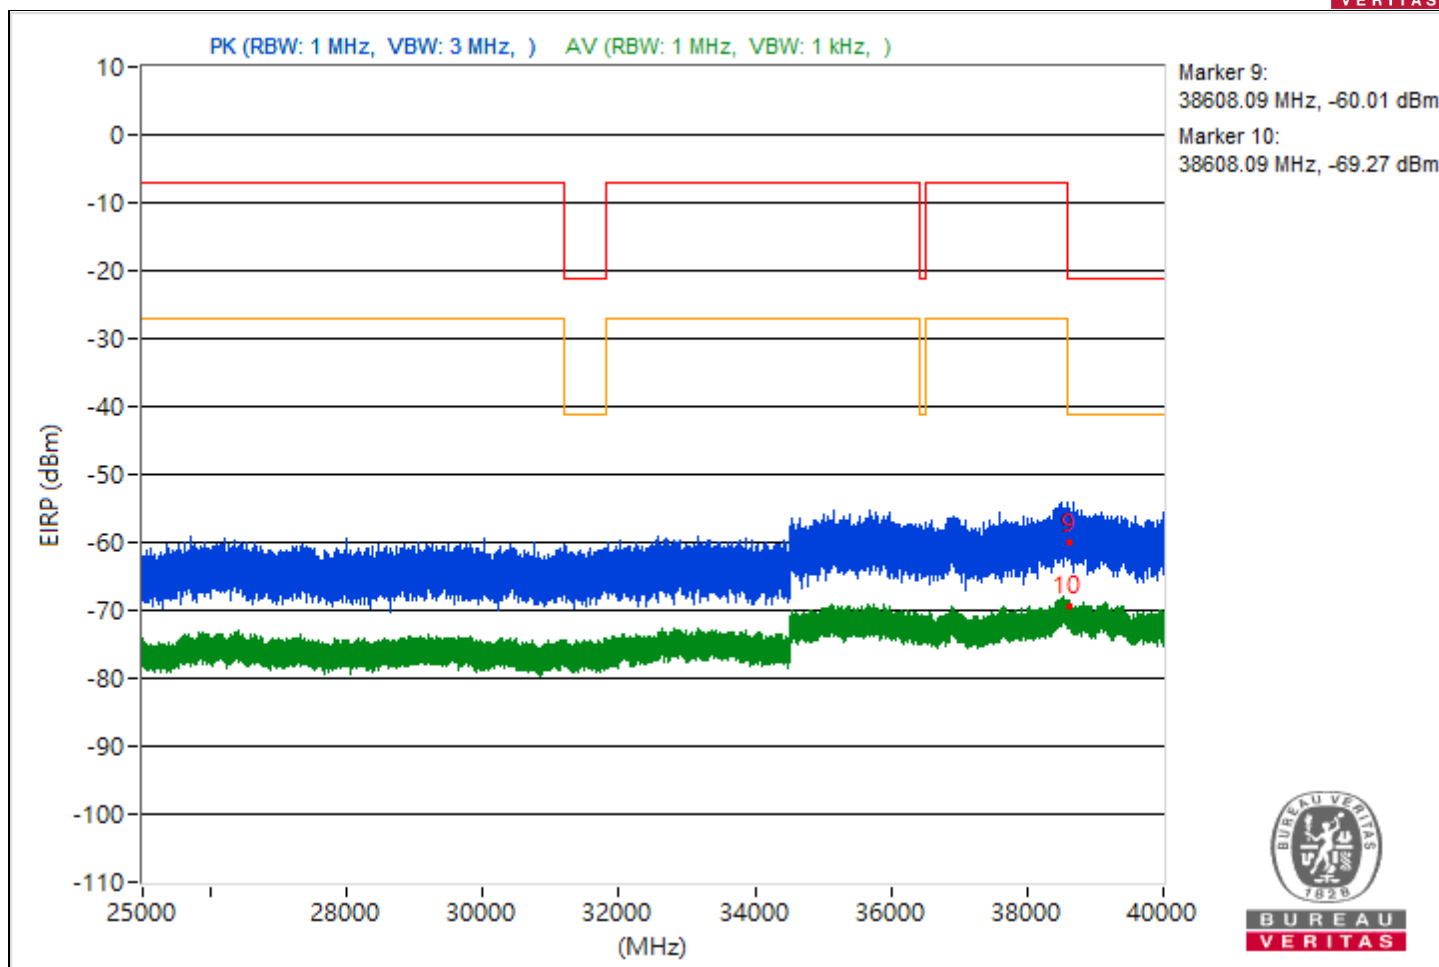





|                          |                  |             |                   |
|--------------------------|------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT40) | Channel     | CH 123 : 6565 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz   | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH     | Tested By   | JyunChun.Lin      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5455.66         | 35.71 PK                | 74             | -38.29      | -72.26                  | -69.6                   | 8.17                   | -59.55           |
| 2                            | 5455.66         | 27.81 AV                | 54             | -26.19      | -78.35                  | -78.93                  | 8.17                   | -67.45           |
| 3                            | 7280.79         | 35.71 PK                | 74             | -38.29      | -71.64                  | -69.97                  | 8.17                   | -59.55           |
| 4                            | 7280.79         | 26.35 AV                | 54             | -27.65      | -78.31                  | -83.14                  | 8.17                   | -68.91           |
| 5                            | 19250.3         | 38.82 PK                | 74             | -35.18      | -66.28                  | -69.57                  | 8.17                   | -56.44           |
| 6                            | 19250.3         | 27.94 AV                | 54             | -26.06      | -76.48                  | -82.37                  | 8.17                   | -67.32           |
| 7                            | 23816.2         | 39.86 PK                | 74             | -34.14      | -65.06                  | -68.95                  | 8.17                   | -55.4            |
| 8                            | 23816.2         | 30.06 AV                | 54             | -23.94      | -75.31                  | -77.82                  | 8.17                   | -65.2            |
| 9                            | 38600.89        | 36.63 PK                | 74             | -37.37      | -72.56                  | -68.13                  | 8.17                   | -58.63           |
| 10                           | 38600.89        | 26.14 AV                | 54             | -27.86      | -79.09                  | -81.97                  | 8.17                   | -69.12           |

Note: Margin value = Emission Level - Limit value

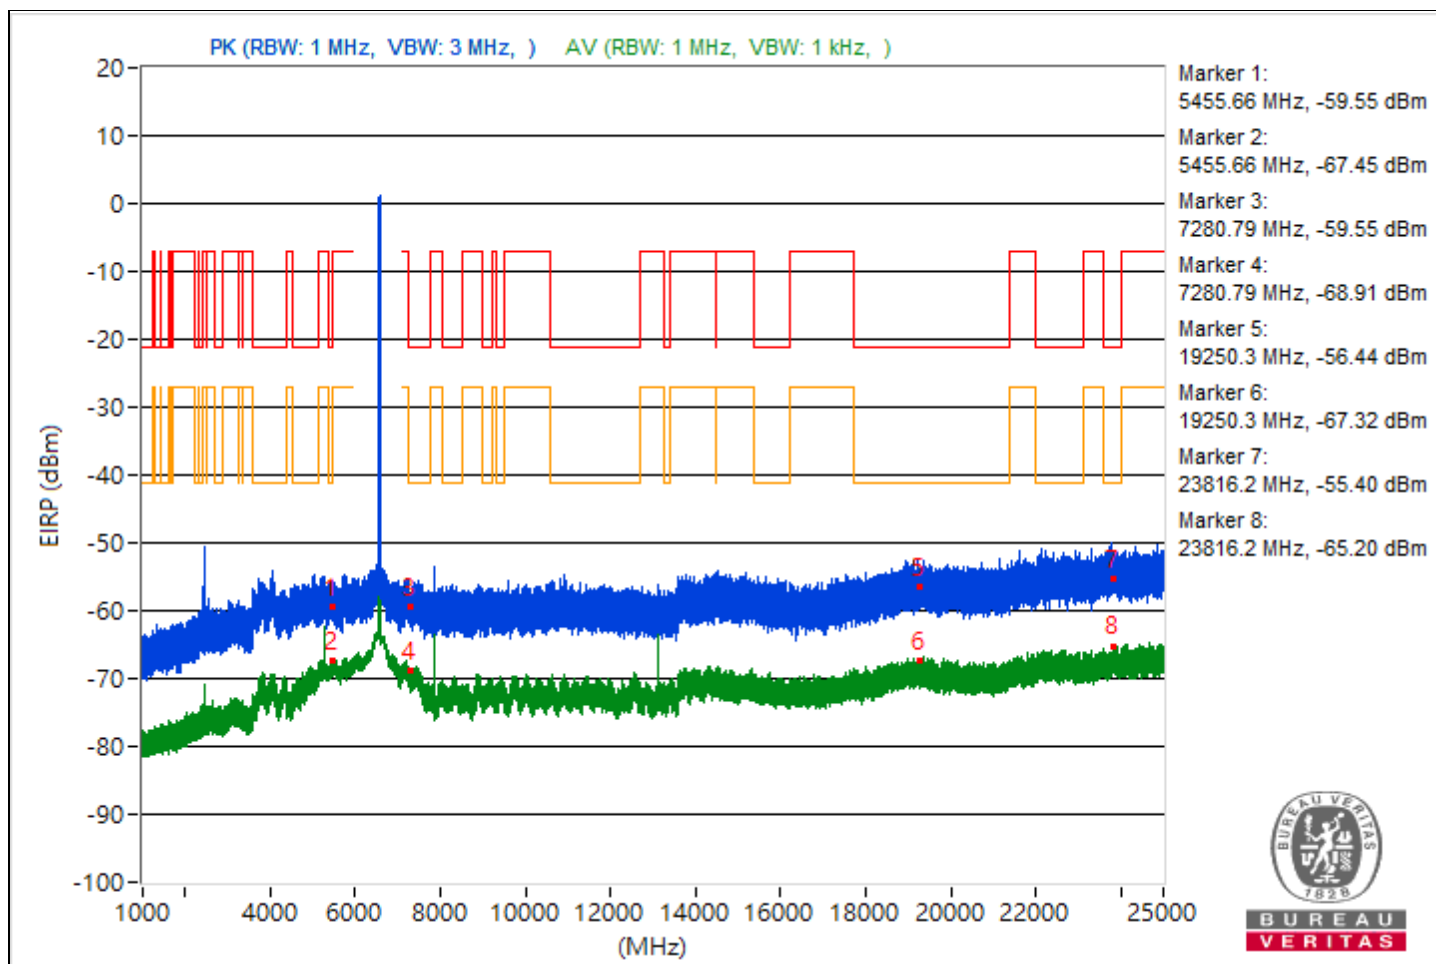


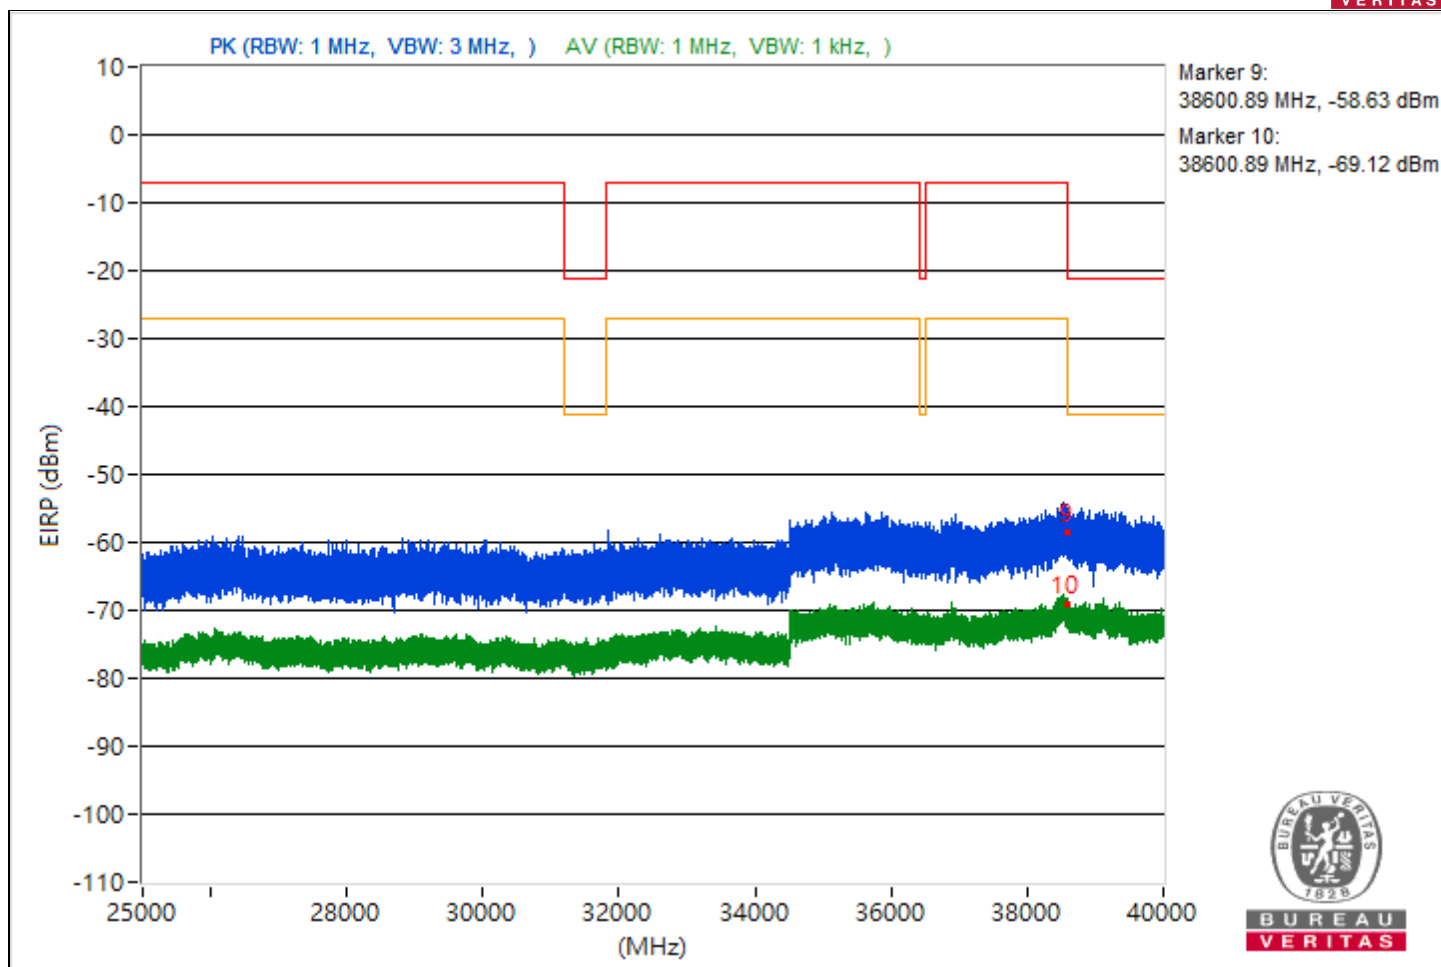


|                          |                  |             |                   |
|--------------------------|------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT40) | Channel     | CH 155 : 6725 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz   | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH     | Tested By   | JyunChun.Lin      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5459.23         | 34.94 PK                | 74             | -39.06      | -72.3                   | -70.83                  | 8.17                   | -60.32           |
| 2                            | 5459.23         | 28.52 AV                | 54             | -25.48      | -77.58                  | -78.29                  | 8.17                   | -66.74           |
| 3                            | 7469.79         | 36.7 PK                 | 74             | -37.3       | -71.24                  | -68.63                  | 8.17                   | -58.56           |
| 4                            | 7469.79         | 27.32 AV                | 54             | -26.68      | -77.21                  | -82.6                   | 8.17                   | -67.94           |
| 5                            | 19262.5         | 36.89 PK                | 74             | -37.11      | -69.65                  | -69.45                  | 8.17                   | -58.37           |
| 6                            | 19262.5         | 28.64 AV                | 54             | -25.36      | -76.69                  | -79.3                   | 8.17                   | -66.62           |
| 7                            | 23884.9         | 42.22 PK                | 74             | -31.78      | -63.33                  | -65.33                  | 8.17                   | -53.04           |
| 8                            | 23884.9         | 30.29 AV                | 54             | -23.71      | -76.86                  | -75.54                  | 8.17                   | -64.97           |
| 9                            | 38836.62        | 35.16 PK                | 74             | -38.84      | -71.37                  | -71.19                  | 8.17                   | -60.1            |
| 10                           | 38836.62        | 25.84 AV                | 54             | -28.16      | -79.07                  | -83                     | 8.17                   | -69.42           |

Note: Margin value = Emission Level - Limit value

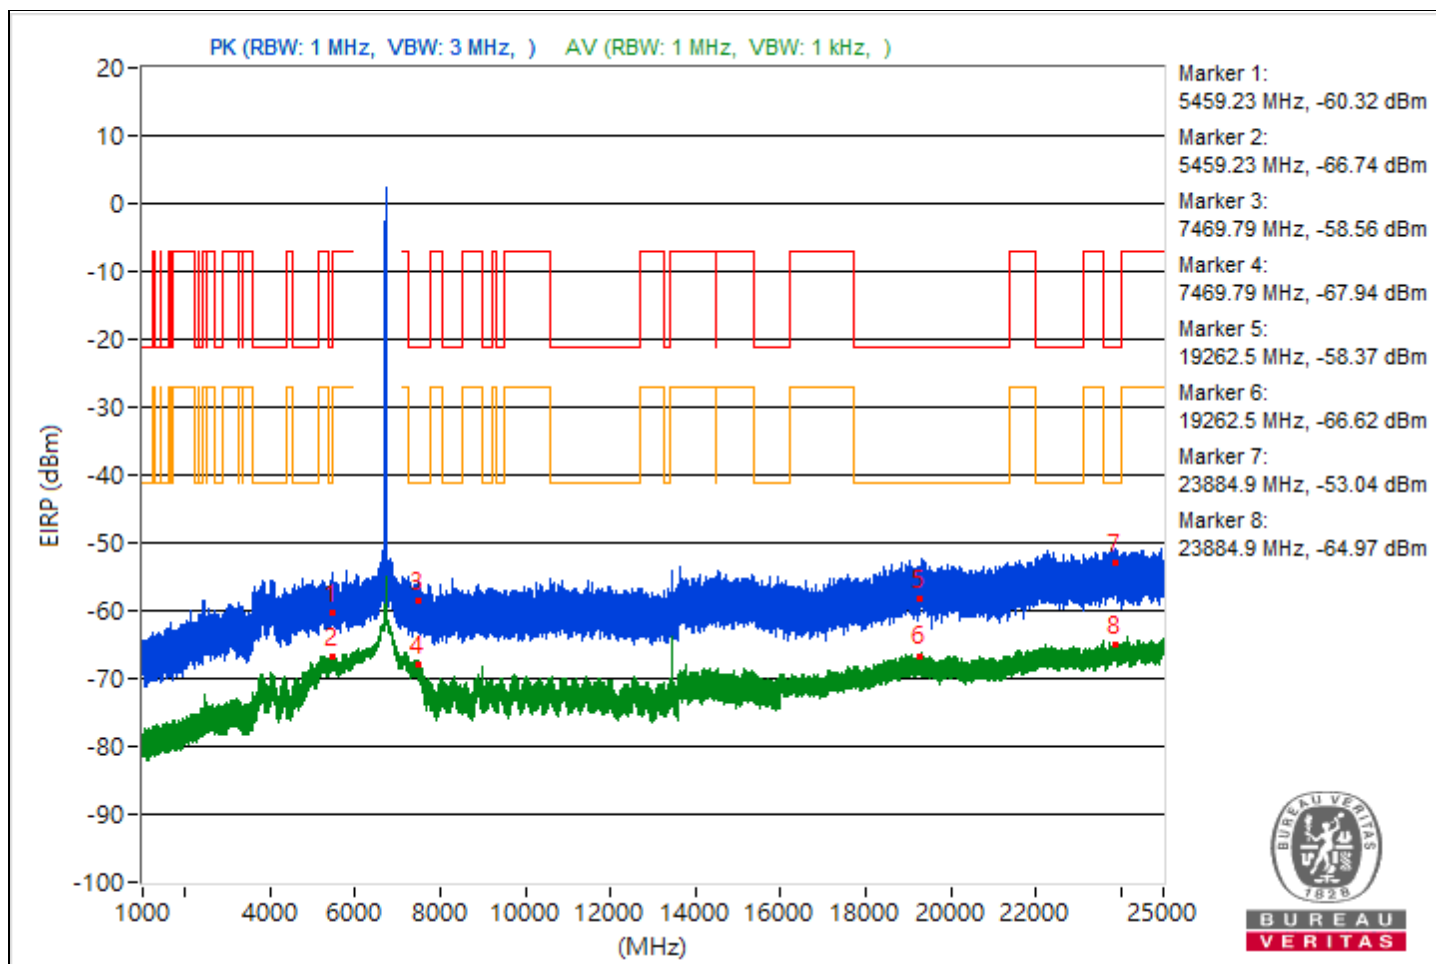


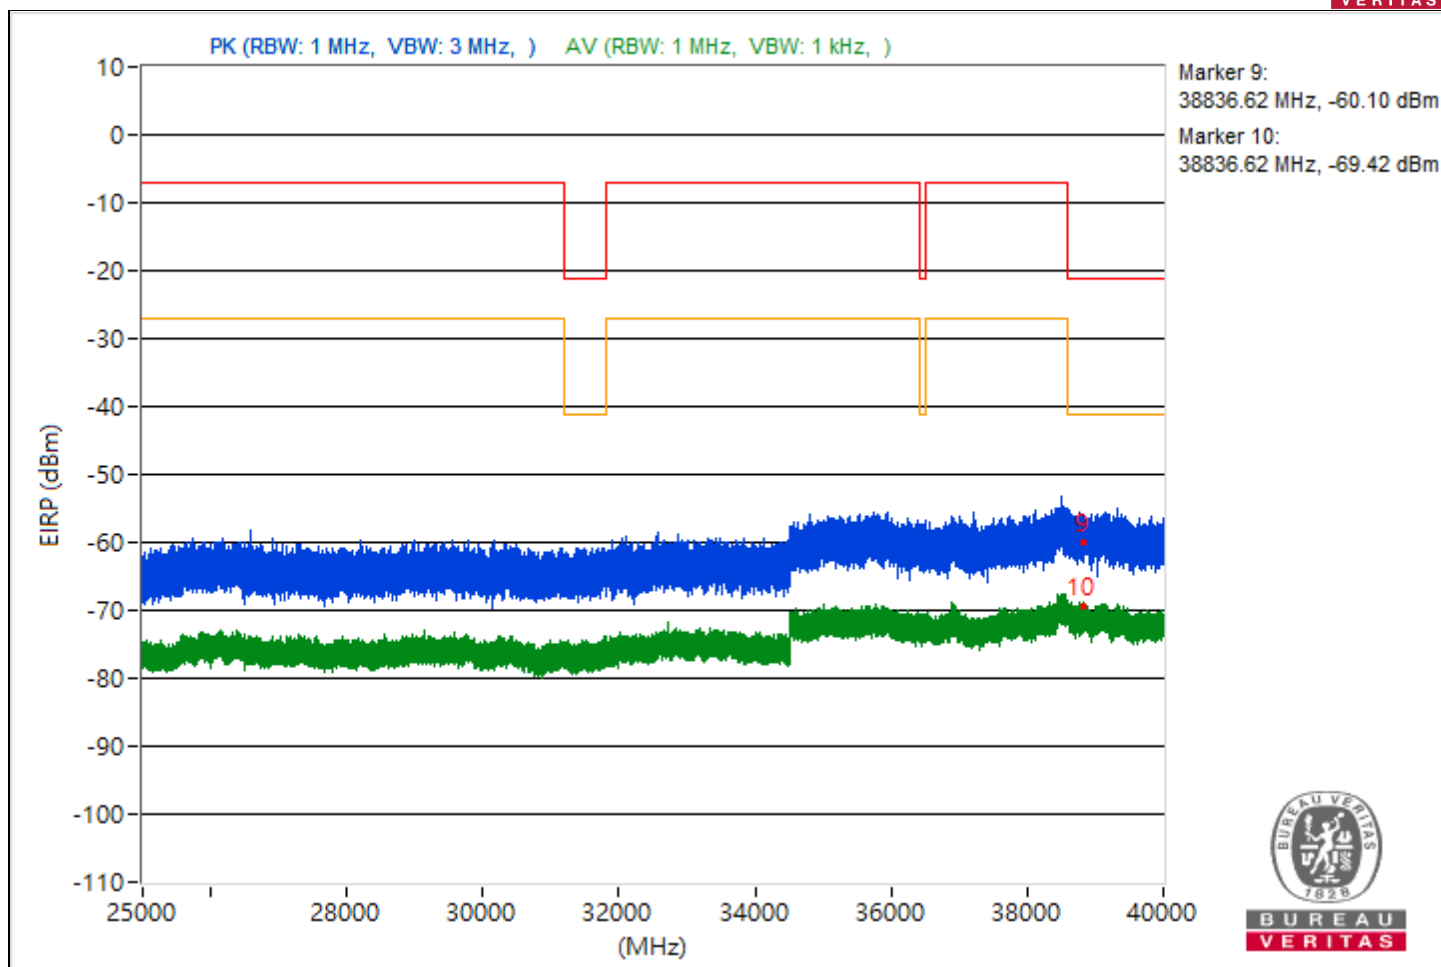


|                          |                  |             |                   |
|--------------------------|------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT40) | Channel     | CH 179 : 6845 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz   | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH     | Tested By   | JyunChun.Lin      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5454.1          | 34.96 PK                | 74             | -39.04      | -72.06                  | -70.97                  | 8.17                   | -60.3            |
| 2                            | 5454.1          | 27.29 AV                | 54             | -26.71      | -79.04                  | -79.27                  | 8.17                   | -67.97           |
| 3                            | 7448.24         | 37.06 PK                | 74             | -36.94      | -69.45                  | -69.3                   | 8.17                   | -58.2            |
| 4                            | 7448.24         | 26.7 AV                 | 54             | -27.3       | -78.42                  | -81.66                  | 8.17                   | -68.56           |
| 5                            | 19896.5         | 39.25 PK                | 74             | -34.75      | -67.67                  | -66.76                  | 8.17                   | -56.01           |
| 6                            | 19896.5         | 27.89 AV                | 54             | -26.11      | -76.87                  | -81.32                  | 8.17                   | -67.37           |
| 7                            | 23858.9         | 41.61 PK                | 74             | -32.39      | -62.67                  | -69.33                  | 8.17                   | -53.65           |
| 8                            | 23858.9         | 30.09 AV                | 54             | -23.91      | -77.89                  | -75.22                  | 8.17                   | -65.17           |
| 9                            | 39146.84        | 33.89 PK                | 74             | -40.11      | -73.45                  | -71.81                  | 8.17                   | -61.37           |
| 10                           | 39146.84        | 26.6 AV                 | 54             | -27.4       | -81.02                  | -78.91                  | 8.17                   | -68.66           |

Note: Margin value = Emission Level - Limit value

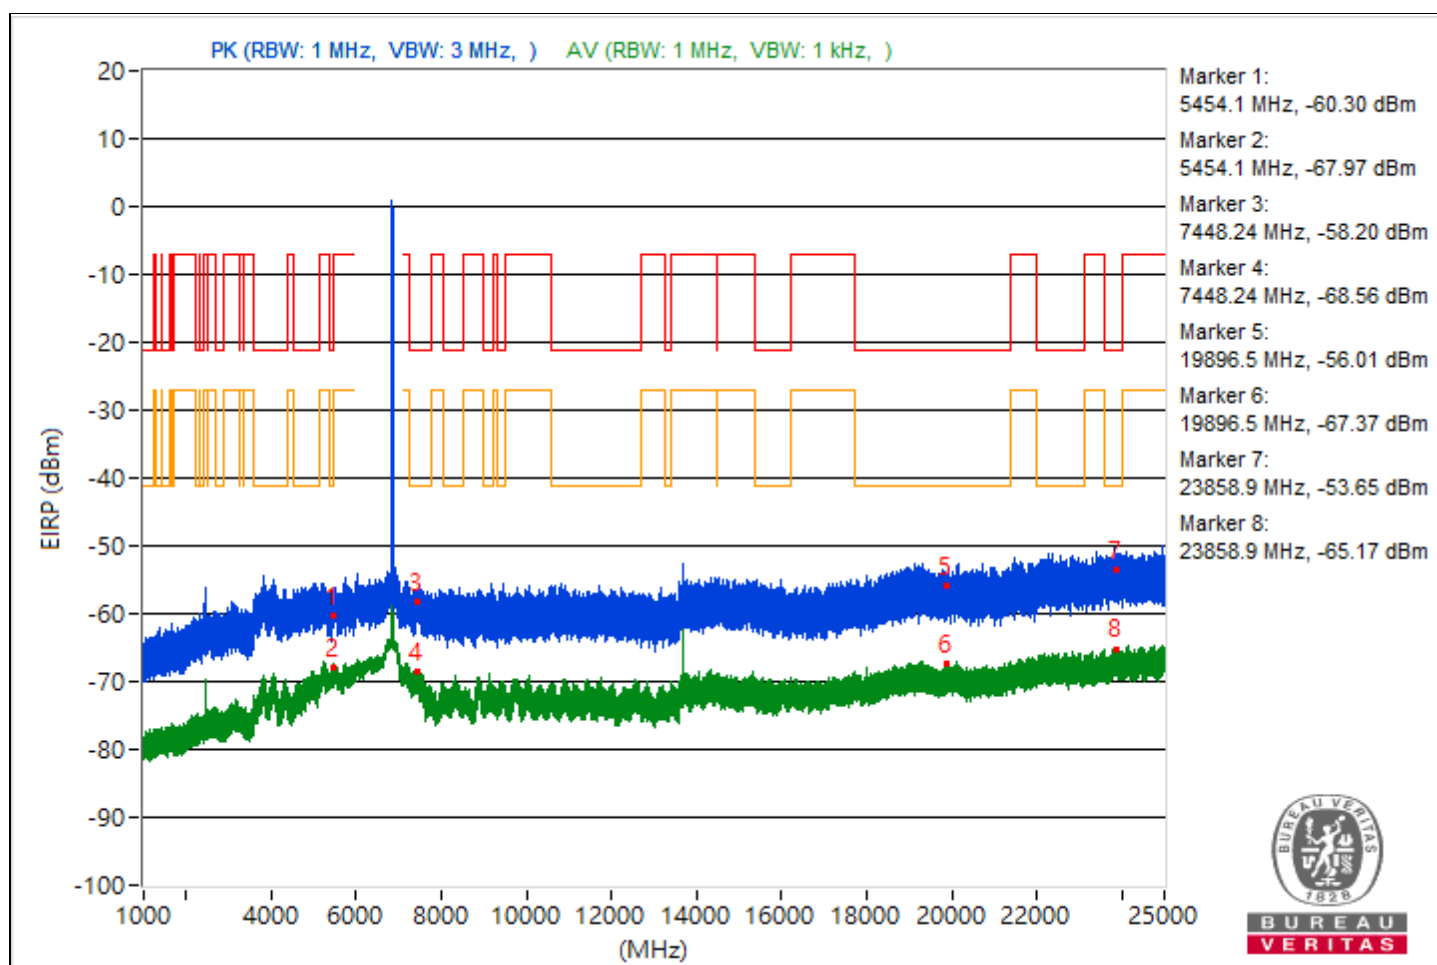


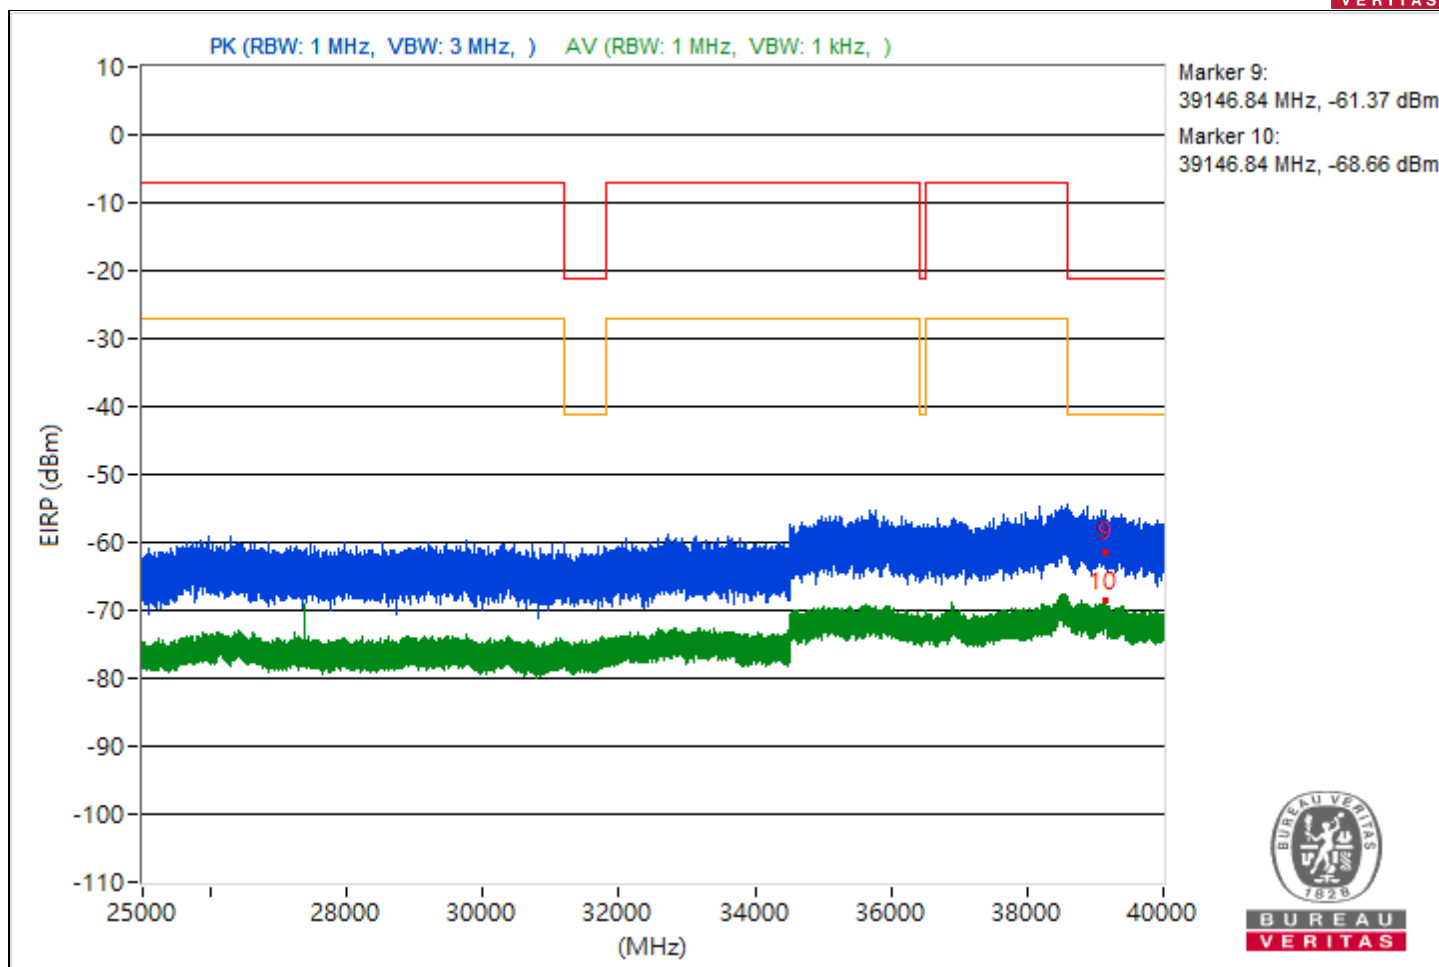


|                          |                  |             |                 |
|--------------------------|------------------|-------------|-----------------|
| RF Mode                  | 802.11be (EHT80) | Channel     | CH 7 : 5985 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz   | Input Power | 3.3 Vdc         |
| Environmental Conditions | 24°C, 63% RH     | Tested By   | JyunChun.Lin    |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5458.46         | 36.81 PK                | 74             | -37.19      | -69.86                  | -69.41                  | 8.17                   | -58.45           |
| 2                            | 5458.46         | 30.03 AV                | 54             | -23.97      | -77.03                  | -75.87                  | 8.17                   | -65.23           |
| 3                            | 11969.69        | 36.82 PK                | 74             | -37.18      | -70.65                  | -68.79                  | 8.17                   | -58.44           |
| 4                            | 11969.69        | 26.1 AV                 | 54             | -27.9       | -82.73                  | -78.8                   | 8.17                   | -69.16           |
| 5                            | 19212.5         | 36.78 PK                | 74             | -37.22      | -68.76                  | -70.8                   | 8.17                   | -58.48           |
| 6                            | 19212.5         | 27.89 AV                | 54             | -26.11      | -77.14                  | -80.65                  | 8.17                   | -67.37           |
| 7                            | 23854.1         | 40.95 PK                | 74             | -33.05      | -65.83                  | -65.17                  | 8.17                   | -54.31           |
| 8                            | 23854.1         | 30.17 AV                | 54             | -23.83      | -78.95                  | -74.62                  | 8.17                   | -65.09           |
| 9                            | 38829.69        | 35.32 PK                | 74             | -38.68      | -70.35                  | -72.06                  | 8.17                   | -59.94           |
| 10                           | 38829.69        | 26.84 AV                | 54             | -27.16      | -78.59                  | -80.9                   | 8.17                   | -68.42           |

Note: Margin value = Emission Level - Limit value

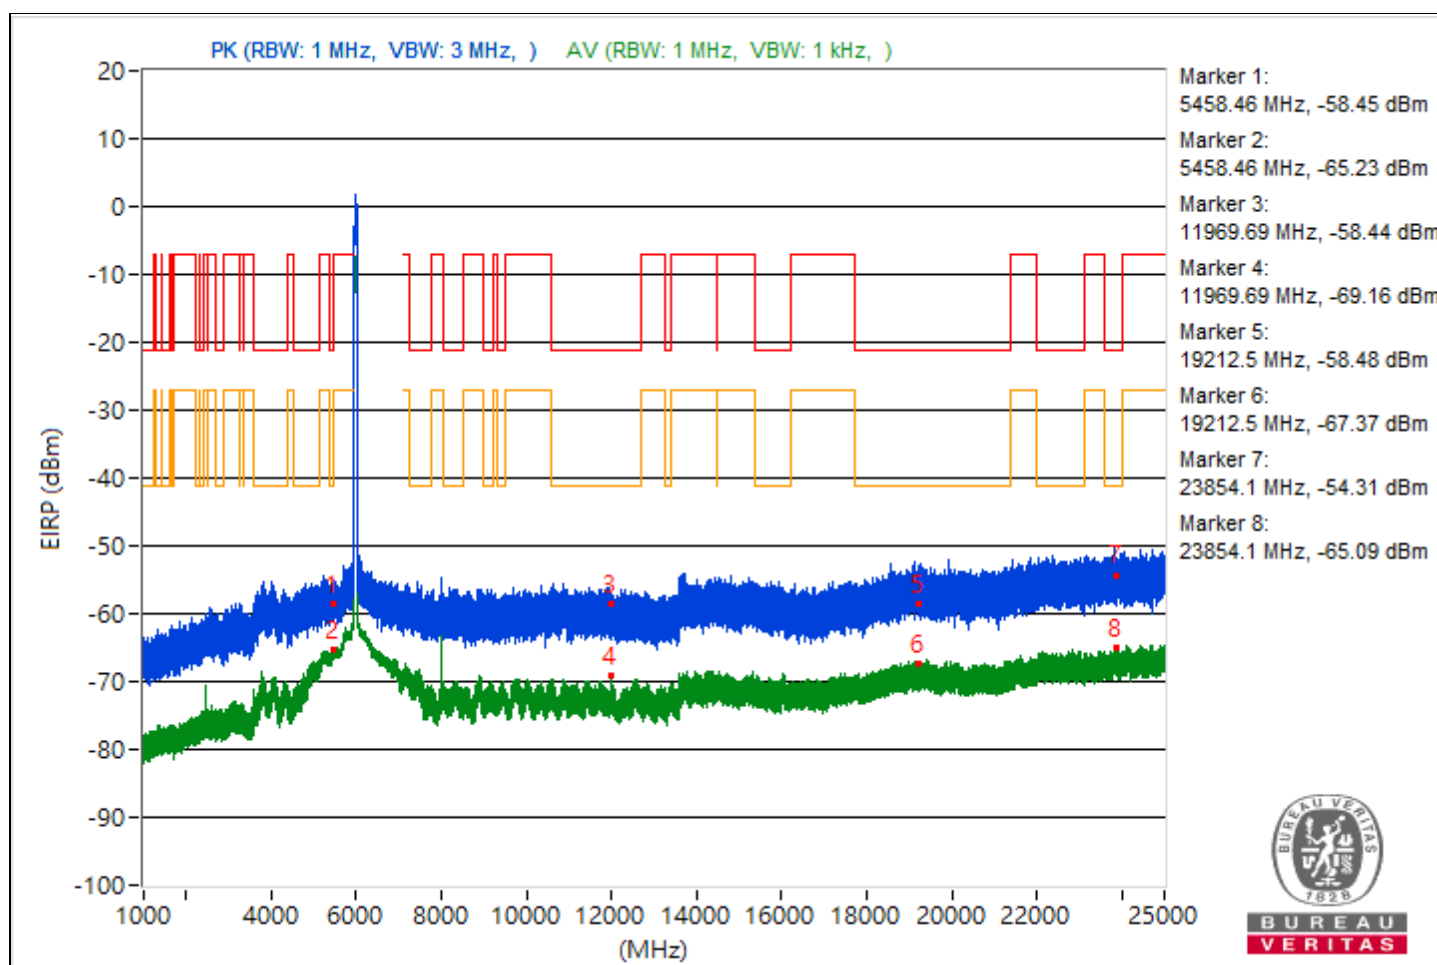

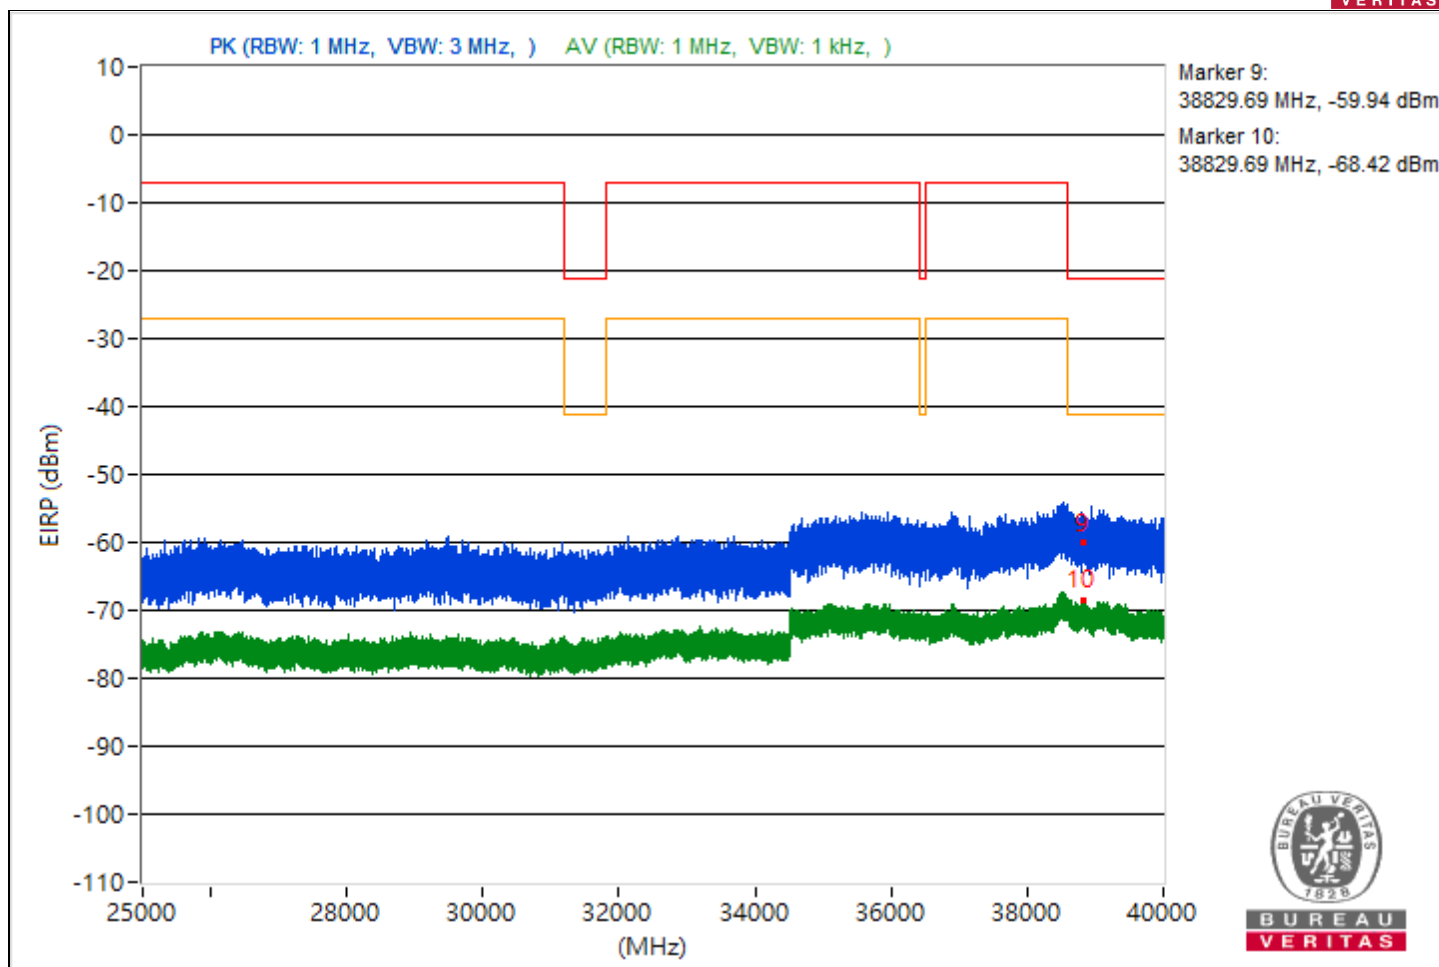





|                          |                  |             |                  |
|--------------------------|------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT80) | Channel     | CH 39 : 6145 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz   | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 63% RH     | Tested By   | JyunChun.Lin     |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5440.41         | 37.46 PK                | 74             | -36.54      | -71.49                  | -67.4                   | 8.17                   | -57.8            |
| 2                            | 5440.41         | 29.54 AV                | 54             | -24.46      | -77.27                  | -76.56                  | 8.17                   | -65.72           |
| 3                            | 8193.16         | 39.46 PK                | 74             | -34.54      | -65.55                  | -69.11                  | 8.17                   | -55.8            |
| 4                            | 8193.16         | 31.63 AV                | 54             | -22.37      | -73.66                  | -76.38                  | 8.17                   | -63.63           |
| 5                            | 20744.8         | 38.39 PK                | 74             | -35.61      | -67.49                  | -68.69                  | 8.17                   | -56.87           |
| 6                            | 20744.8         | 28.43 AV                | 54             | -25.57      | -79.68                  | -76.8                   | 8.17                   | -66.83           |
| 7                            | 23838           | 40.81 PK                | 74             | -33.19      | -64.82                  | -66.64                  | 8.17                   | -54.45           |
| 8                            | 23838           | 29.97 AV                | 54             | -24.03      | -78.85                  | -74.94                  | 8.17                   | -65.29           |
| 9                            | 38601.33        | 36.9 PK                 | 74             | -37.1       | -68.56                  | -70.8                   | 8.17                   | -58.36           |
| 10                           | 38601.33        | 26.72 AV                | 54             | -27.28      | -81.59                  | -78.42                  | 8.17                   | -68.54           |

Note: Margin value = Emission Level - Limit value

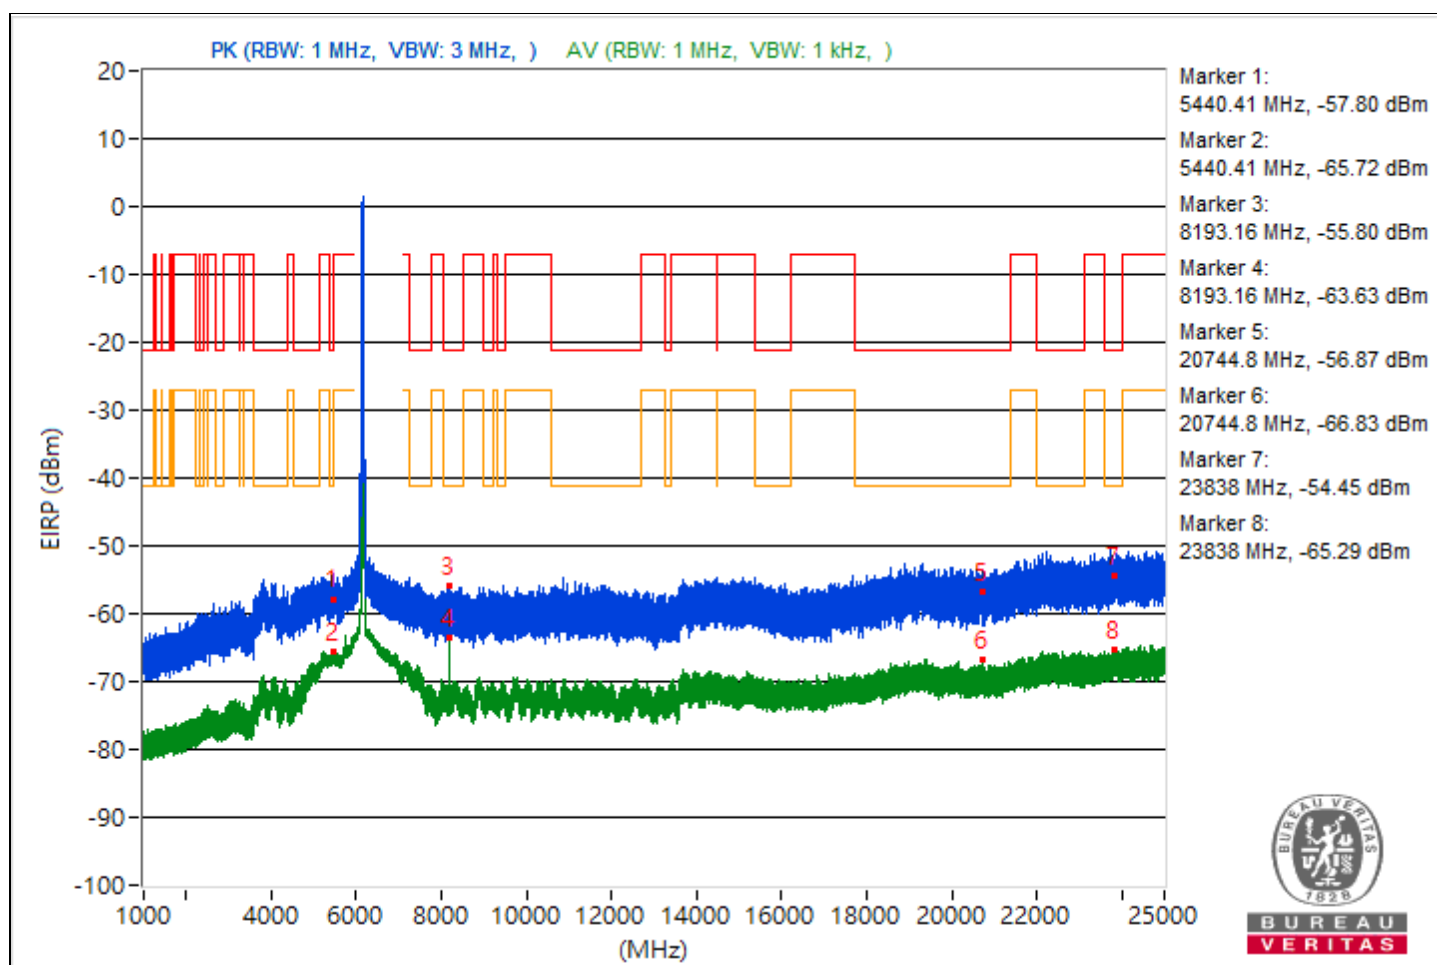


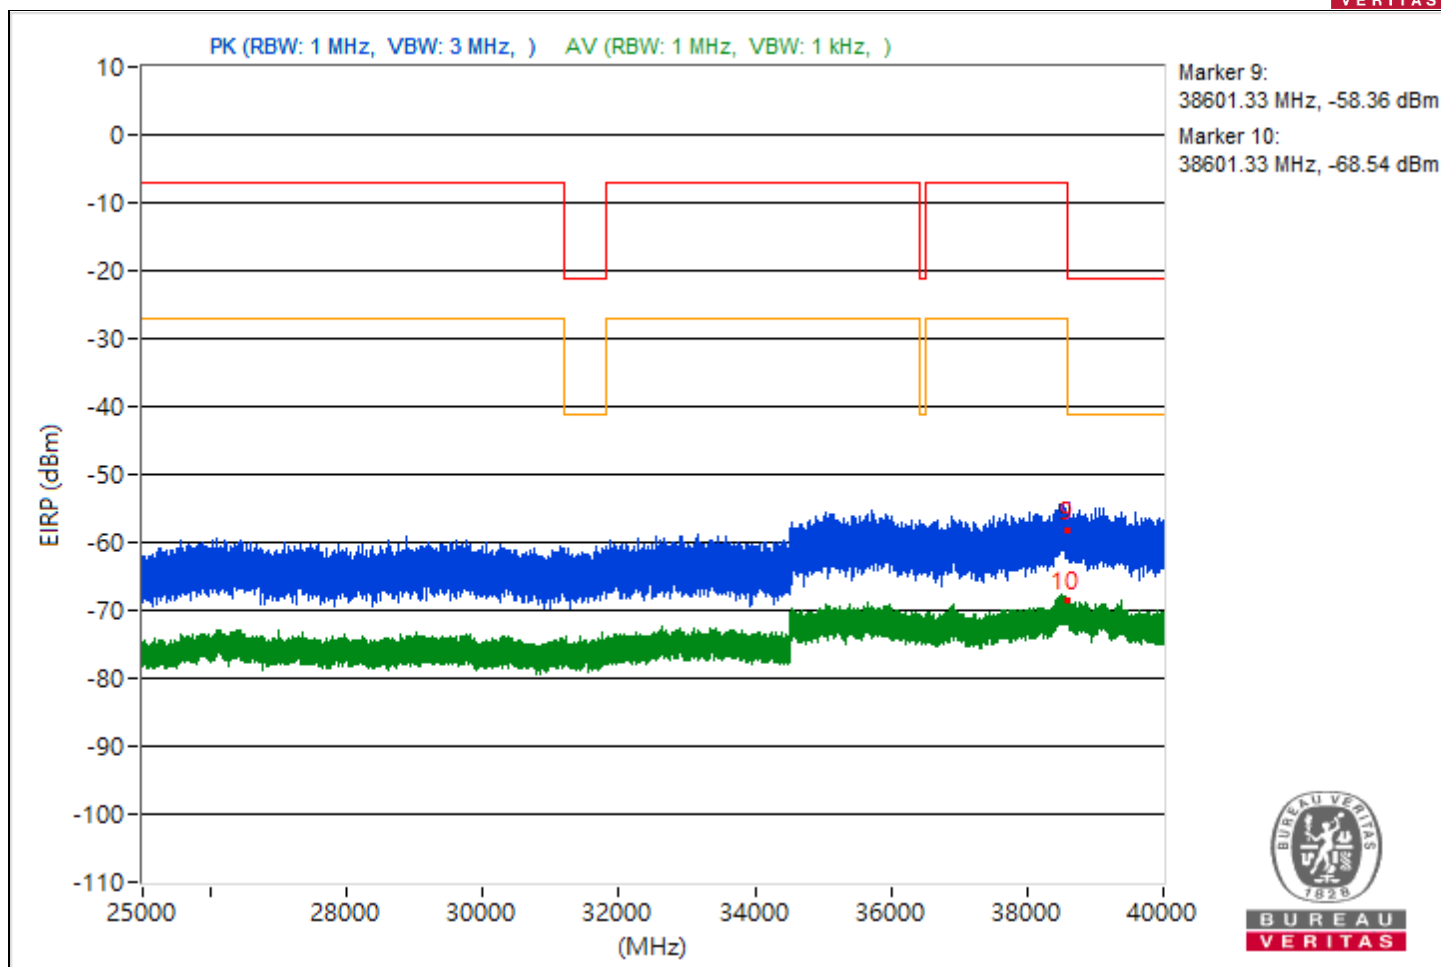


|                          |                  |             |                  |
|--------------------------|------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT80) | Channel     | CH 87 : 6385 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz   | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 63% RH     | Tested By   | JyunChun.Lin     |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5459.78         | 37.87 PK                | 74             | -36.13      | -69.63                  | -67.71                  | 8.17                   | -57.39           |
| 2                            | 5459.78         | 28.69 AV                | 54             | -25.31      | -78.99                  | -76.79                  | 8.17                   | -66.57           |
| 3                            | 7252.48         | 34.29 PK                | 74             | -39.71      | -72.95                  | -71.48                  | 8.17                   | -60.97           |
| 4                            | 7252.48         | 26.48 AV                | 54             | -27.52      | -77.8                   | -84.43                  | 8.17                   | -68.78           |
| 5                            | 21234.4         | 39.39 PK                | 74             | -34.61      | -70.37                  | -65.2                   | 8.17                   | -55.87           |
| 6                            | 21234.4         | 28.41 AV                | 54             | -25.59      | -79.59                  | -76.89                  | 8.17                   | -66.85           |
| 7                            | 23898           | 41.05 PK                | 74             | -32.95      | -64.79                  | -66.07                  | 8.17                   | -54.21           |
| 8                            | 23898           | 30.69 AV                | 54             | -23.31      | -74.89                  | -76.82                  | 8.17                   | -64.57           |
| 9                            | 38617.51        | 35.97 PK                | 74             | -38.03      | -71.06                  | -69.95                  | 8.17                   | -59.29           |
| 10                           | 38617.51        | 26.26 AV                | 54             | -27.74      | -79.06                  | -81.71                  | 8.17                   | -69              |

Note: Margin value = Emission Level - Limit value

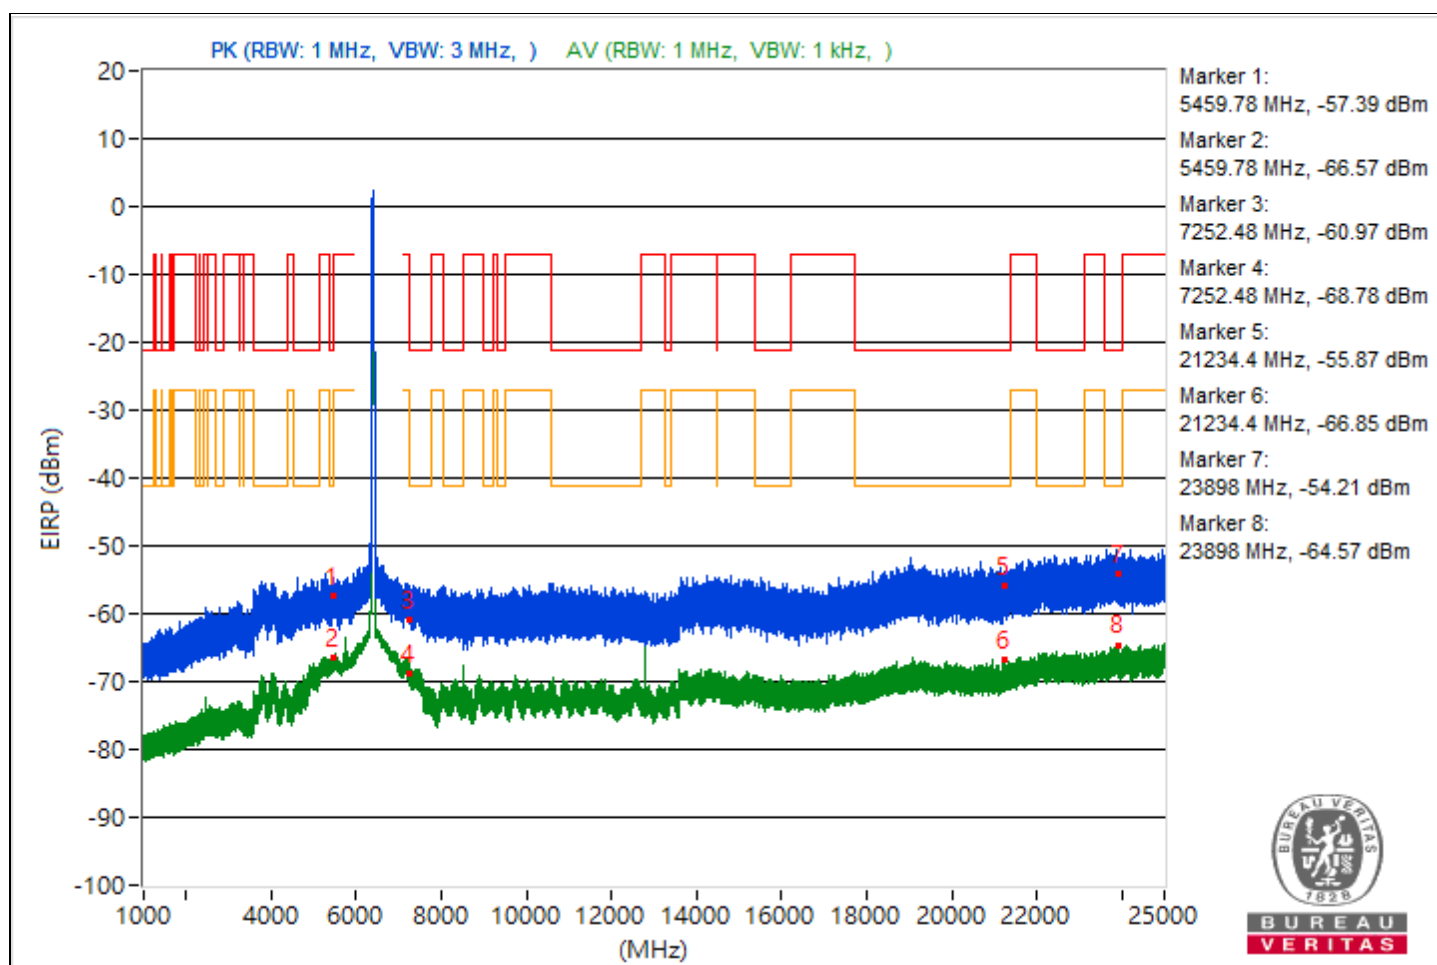


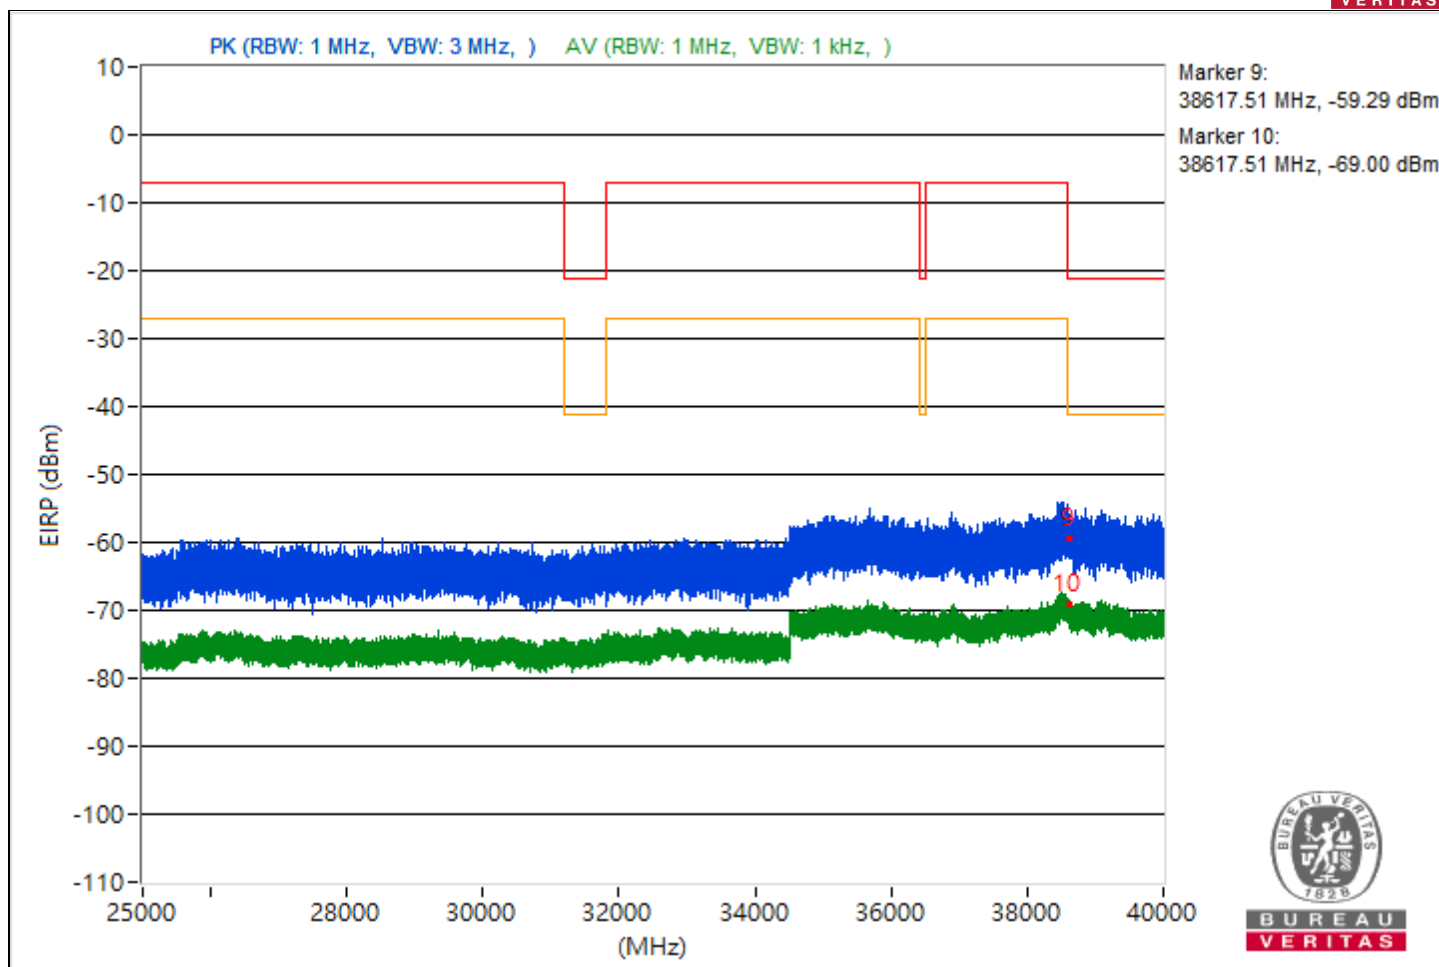


|                          |                  |             |                   |
|--------------------------|------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT80) | Channel     | CH 135 : 6625 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz   | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH     | Tested By   | JyunChun.Lin      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5418.48         | 35 PK                   | 74             | -39         | -71.09                  | -71.81                  | 8.17                   | -60.26           |
| 2                            | 5418.48         | 28.89 AV                | 54             | -25.11      | -78.92                  | -76.51                  | 8.17                   | -66.37           |
| 3                            | 13250.04        | 38.87 PK                | 74             | -35.13      | -71.38                  | -65.57                  | 8.17                   | -56.39           |
| 4                            | 13250.04        | 36.41 AV                | 54             | -17.59      | -79.27                  | -67.28                  | 8.17                   | -58.85           |
| 5                            | 19014.1         | 37.84 PK                | 74             | -36.16      | -70.3                   | -67.39                  | 8.17                   | -57.42           |
| 6                            | 19014.1         | 28.42 AV                | 54             | -25.58      | -76.91                  | -79.51                  | 8.17                   | -66.84           |
| 7                            | 23889.2         | 41.74 PK                | 74             | -32.26      | -66.21                  | -63.58                  | 8.17                   | -53.52           |
| 8                            | 23889.2         | 30.15 AV                | 54             | -23.85      | -75.13                  | -77.87                  | 8.17                   | -65.11           |
| 9                            | 39145.16        | 35.91 PK                | 74             | -38.09      | -71.16                  | -69.98                  | 8.17                   | -59.35           |
| 10                           | 39145.16        | 26.23 AV                | 54             | -27.77      | -82.18                  | -78.86                  | 8.17                   | -69.03           |

Note: Margin value = Emission Level - Limit value

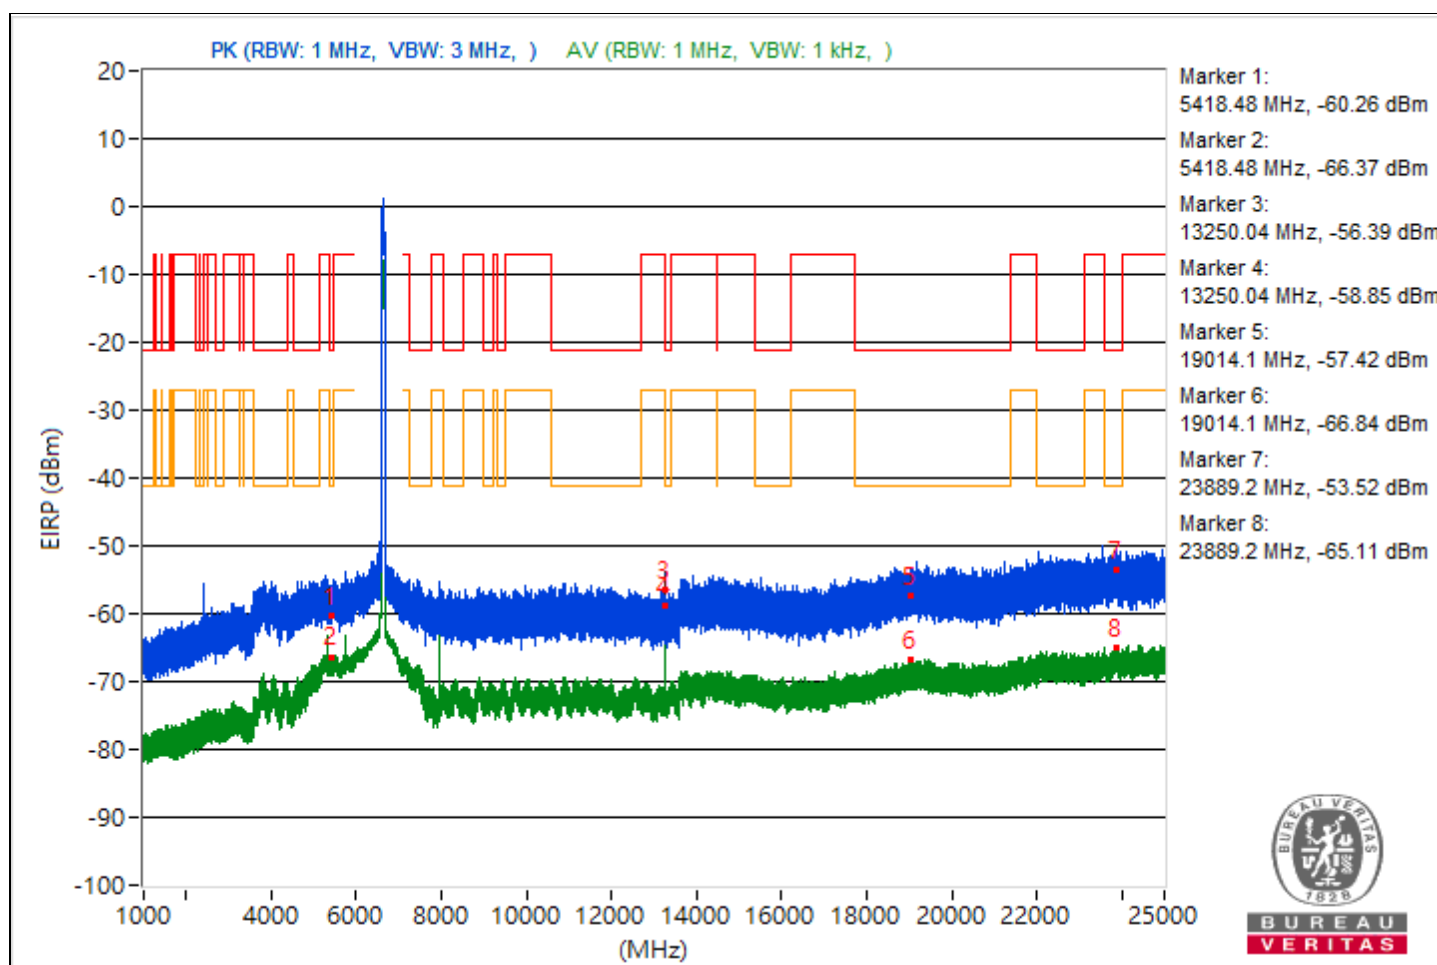


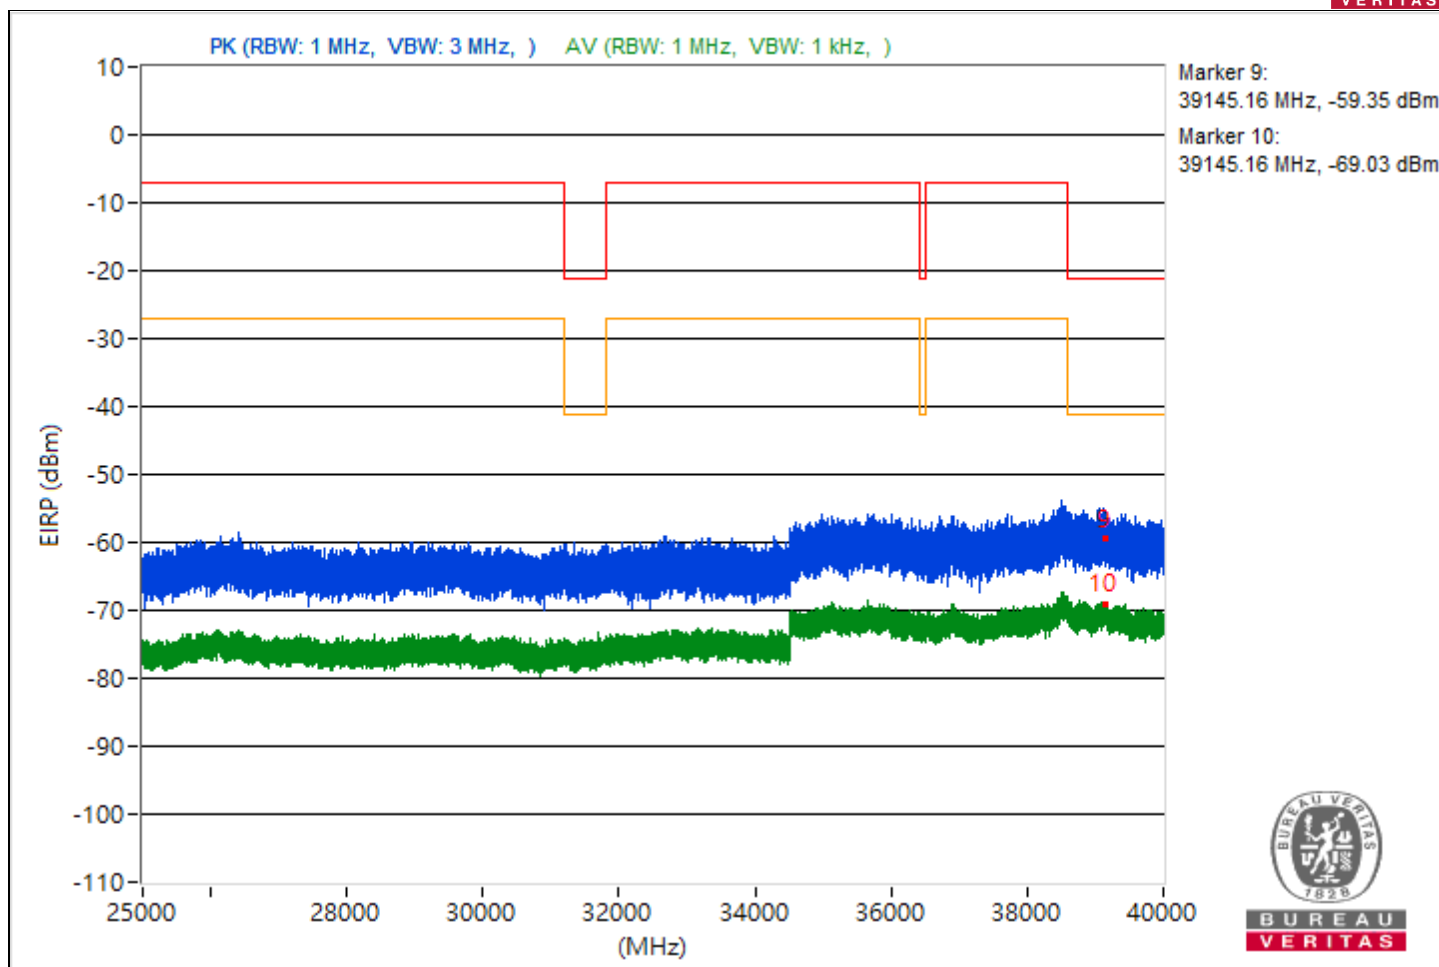


|                          |                  |             |                   |
|--------------------------|------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT80) | Channel     | CH 151 : 6705 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz   | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH     | Tested By   | JyunChun.Lin      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5441.73         | 37.56 PK                | 74             | -36.44      | -68.78                  | -68.98                  | 8.17                   | -57.7            |
| 2                            | 5441.73         | 28.23 AV                | 54             | -25.77      | -79.43                  | -77.26                  | 8.17                   | -67.03           |
| 3                            | 7253.57         | 38.4 PK                 | 74             | -35.6       | -67.64                  | -68.47                  | 8.17                   | -56.86           |
| 4                            | 7253.57         | 27.88 AV                | 54             | -26.12      | -76.89                  | -81.32                  | 8.17                   | -67.38           |
| 5                            | 19250.7         | 38.85 PK                | 74             | -35.15      | -66.06                  | -69.98                  | 8.17                   | -56.41           |
| 6                            | 19250.7         | 28.91 AV                | 54             | -25.09      | -78.31                  | -76.87                  | 8.17                   | -66.35           |
| 7                            | 23891.8         | 42.05 PK                | 74             | -31.95      | -64.43                  | -64.36                  | 8.17                   | -53.21           |
| 8                            | 23891.8         | 30.61 AV                | 54             | -23.39      | -76.89                  | -74.98                  | 8.17                   | -64.65           |
| 9                            | 38600.27        | 36.9 PK                 | 74             | -37.1       | -68.87                  | -70.32                  | 8.17                   | -58.36           |
| 10                           | 38600.27        | 26.57 AV                | 54             | -27.43      | -79.01                  | -80.94                  | 8.17                   | -68.69           |

Note: Margin value = Emission Level - Limit value

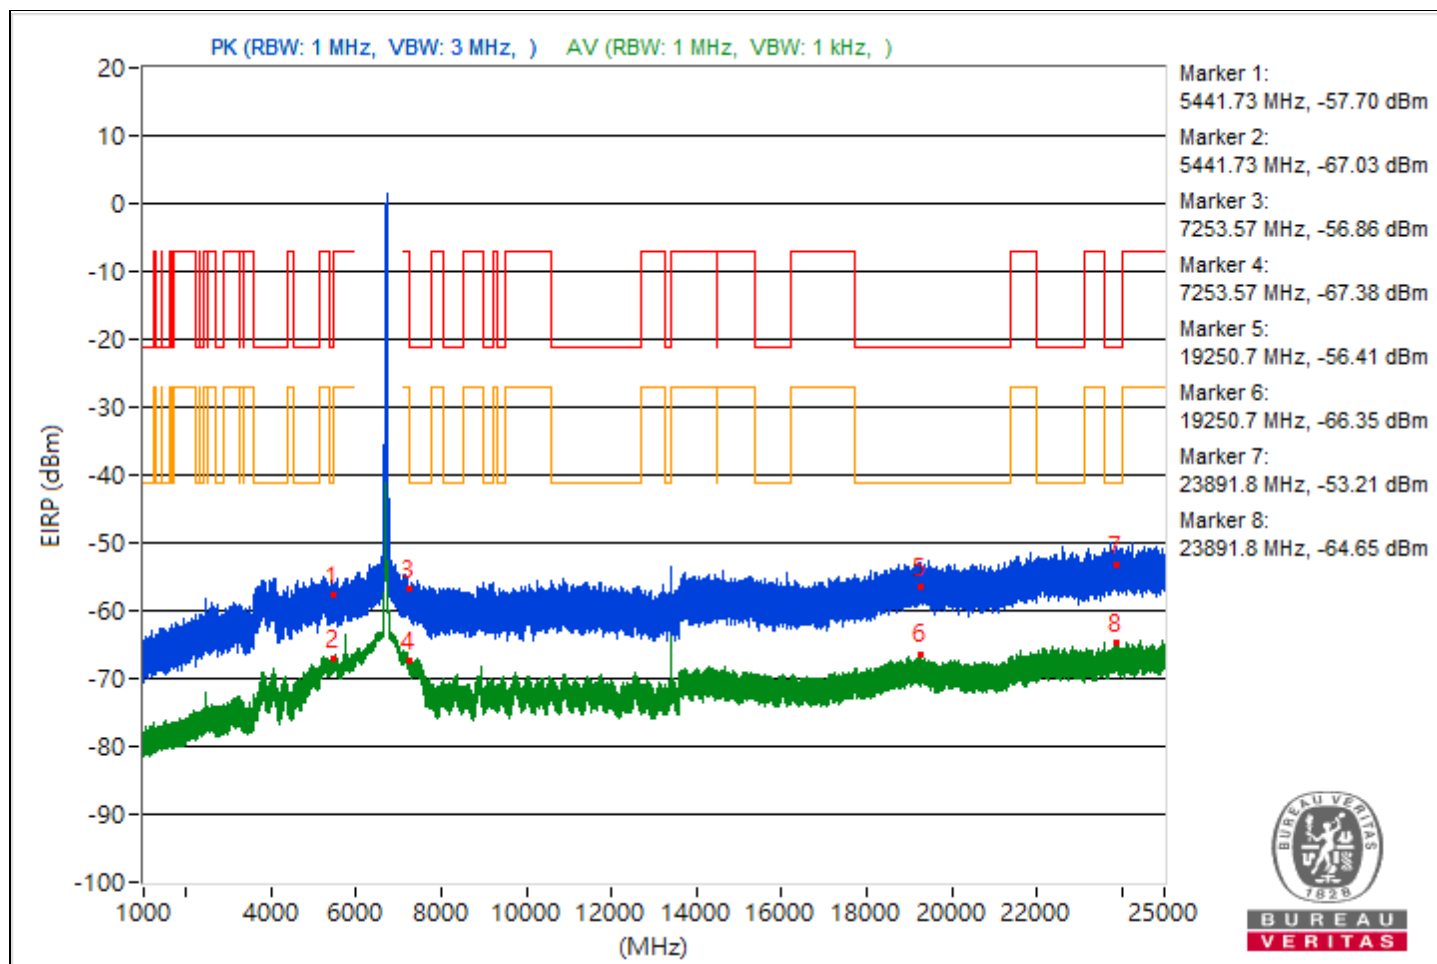

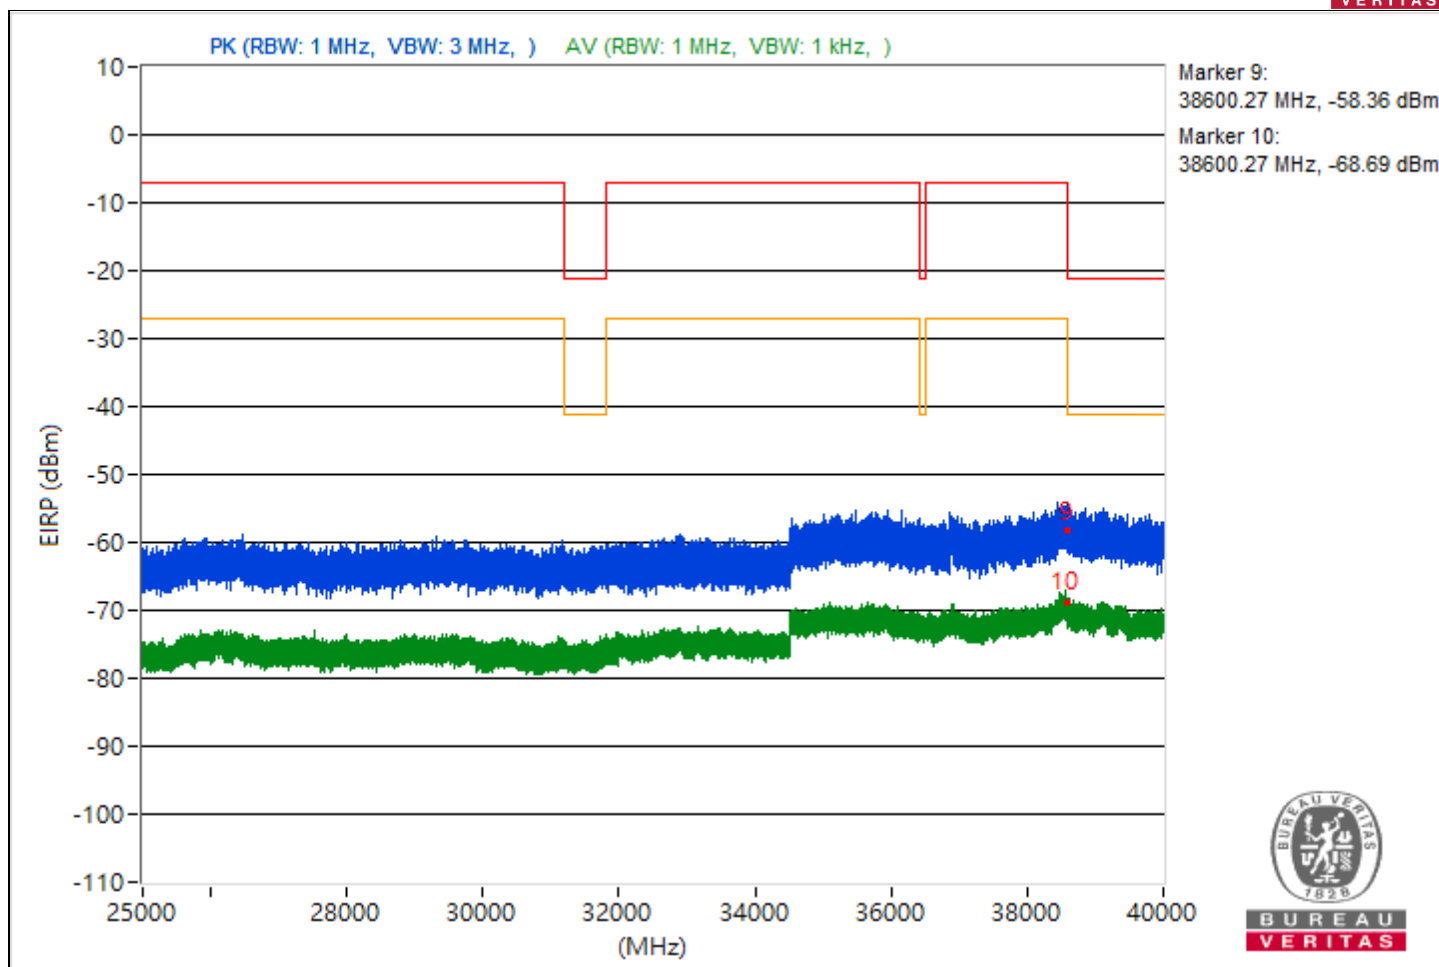





|                          |                  |             |                   |
|--------------------------|------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT80) | Channel     | CH 167 : 6785 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz   | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH     | Tested By   | JyunChun.Lin      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5427.11         | 37.79 PK                | 74             | -36.21      | -69.33                  | -68.07                  | 8.17                   | -57.47           |
| 2                            | 5427.11         | 28.59 AV                | 54             | -25.41      | -77.84                  | -77.87                  | 8.17                   | -66.67           |
| 3                            | 7253.64         | 36.25 PK                | 74             | -37.75      | -72.06                  | -68.9                   | 8.17                   | -59.01           |
| 4                            | 7253.64         | 28.43 AV                | 54             | -25.57      | -77.99                  | -78.04                  | 8.17                   | -66.83           |
| 5                            | 18846.1         | 39.24 PK                | 74             | -34.76      | -66.96                  | -67.46                  | 8.17                   | -56.02           |
| 6                            | 18846.1         | 28.26 AV                | 54             | -25.74      | -79.97                  | -76.92                  | 8.17                   | -67              |
| 7                            | 23871.9         | 41.04 PK                | 74             | -32.96      | -65.1                   | -65.71                  | 8.17                   | -54.22           |
| 8                            | 23871.9         | 30.83 AV                | 54             | -23.17      | -75.05                  | -76.26                  | 8.17                   | -64.43           |
| 9                            | 38820.18        | 34.72 PK                | 74             | -39.28      | -72.38                  | -71.14                  | 8.17                   | -60.54           |
| 10                           | 38820.18        | 26.17 AV                | 54             | -27.83      | -82.49                  | -78.81                  | 8.17                   | -69.09           |

Note: Margin value = Emission Level - Limit value

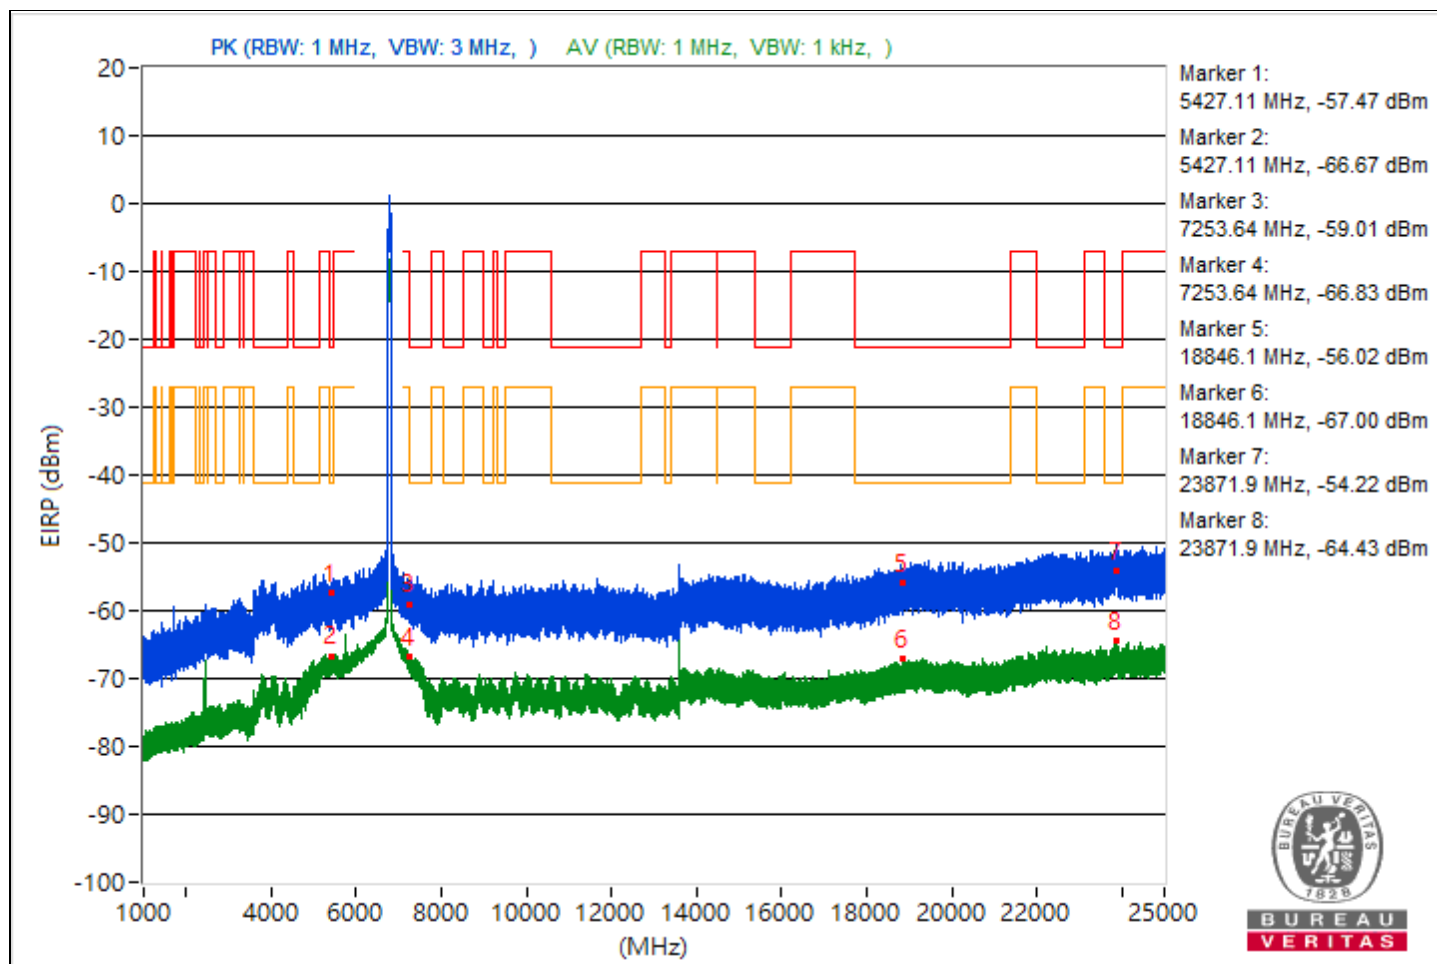


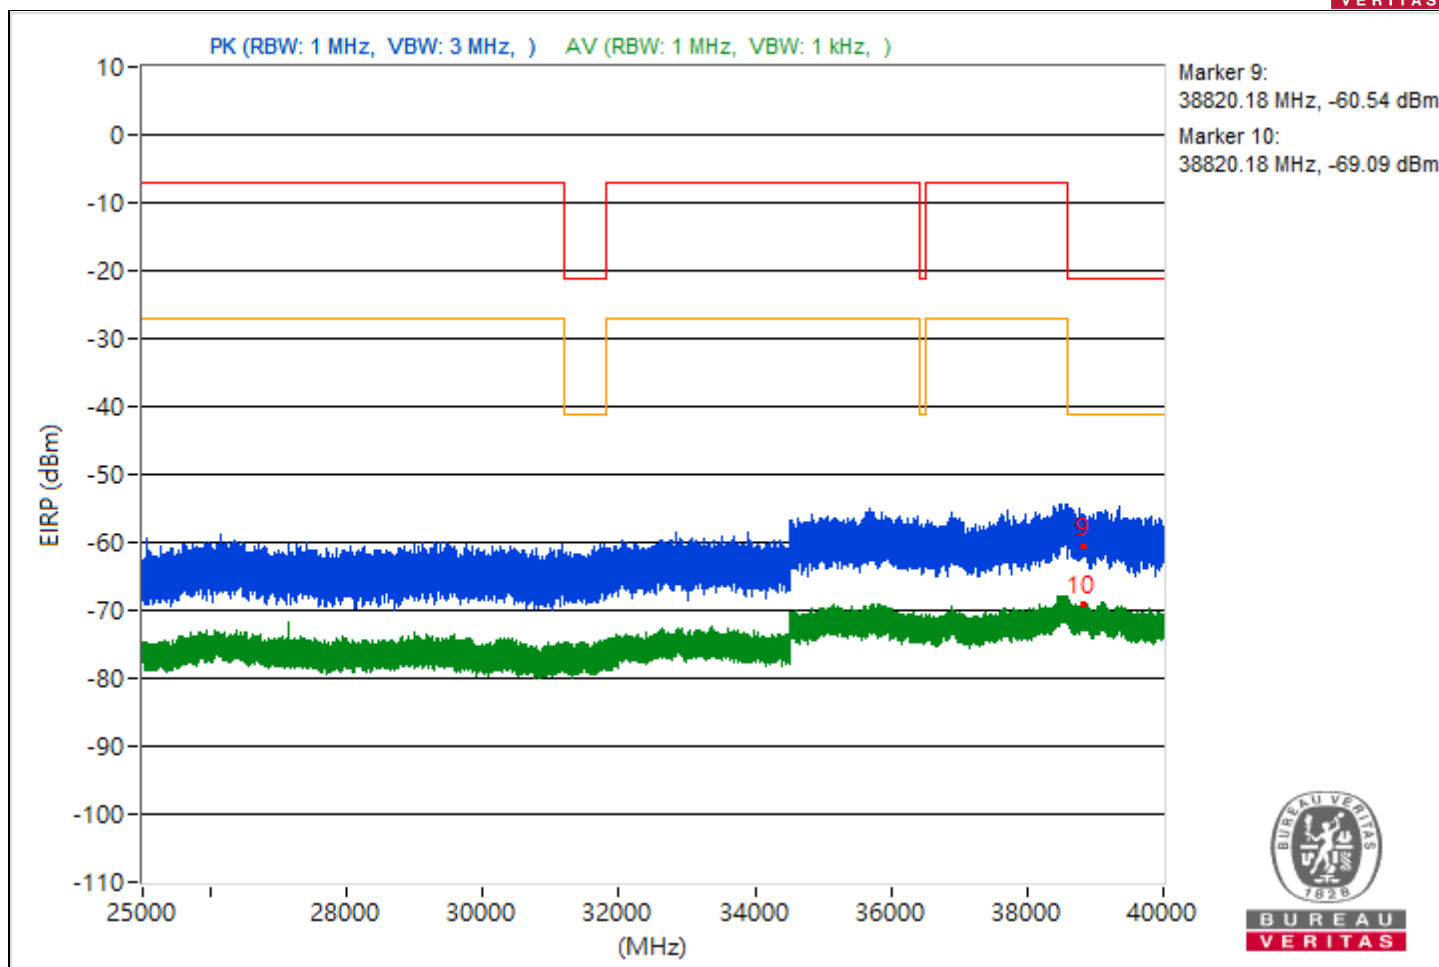


|                          |                   |             |                  |
|--------------------------|-------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT160) | Channel     | CH 15 : 6025 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz    | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 63% RH      | Tested By   | JyunChun.Lin     |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5440.26         | 38.47 PK                | 74             | -35.53      | -69.48                  | -66.85                  | 8.17                   | -56.79           |
| 2                            | 5440.26         | 33.11 AV                | 54             | -20.89      | -74.64                  | -72.33                  | 8.17                   | -62.15           |
| 3                            | 8033.24         | 40.31 PK                | 74             | -33.69      | -65.24                  | -67.24                  | 8.17                   | -54.95           |
| 4                            | 8033.24         | 35.08 AV                | 54             | -18.92      | -69.81                  | -73.8                   | 8.17                   | -60.18           |
| 5                            | 18942.1         | 39.27 PK                | 74             | -34.73      | -66.69                  | -67.71                  | 8.17                   | -55.99           |
| 6                            | 18942.1         | 28.2 AV                 | 54             | -25.8       | -80.38                  | -76.81                  | 8.17                   | -67.06           |
| 7                            | 23806.8         | 40.91 PK                | 74             | -33.09      | -64.35                  | -67.15                  | 8.17                   | -54.35           |
| 8                            | 23806.8         | 29.45 AV                | 54             | -24.55      | -79.46                  | -75.42                  | 8.17                   | -65.81           |
| 9                            | 39113.51        | 37.05 PK                | 74             | -36.95      | -68.14                  | -71.17                  | 8.17                   | -58.21           |
| 10                           | 39113.51        | 26.47 AV                | 54             | -27.53      | -78.82                  | -81.54                  | 8.17                   | -68.79           |

Note: Margin value = Emission Level - Limit value

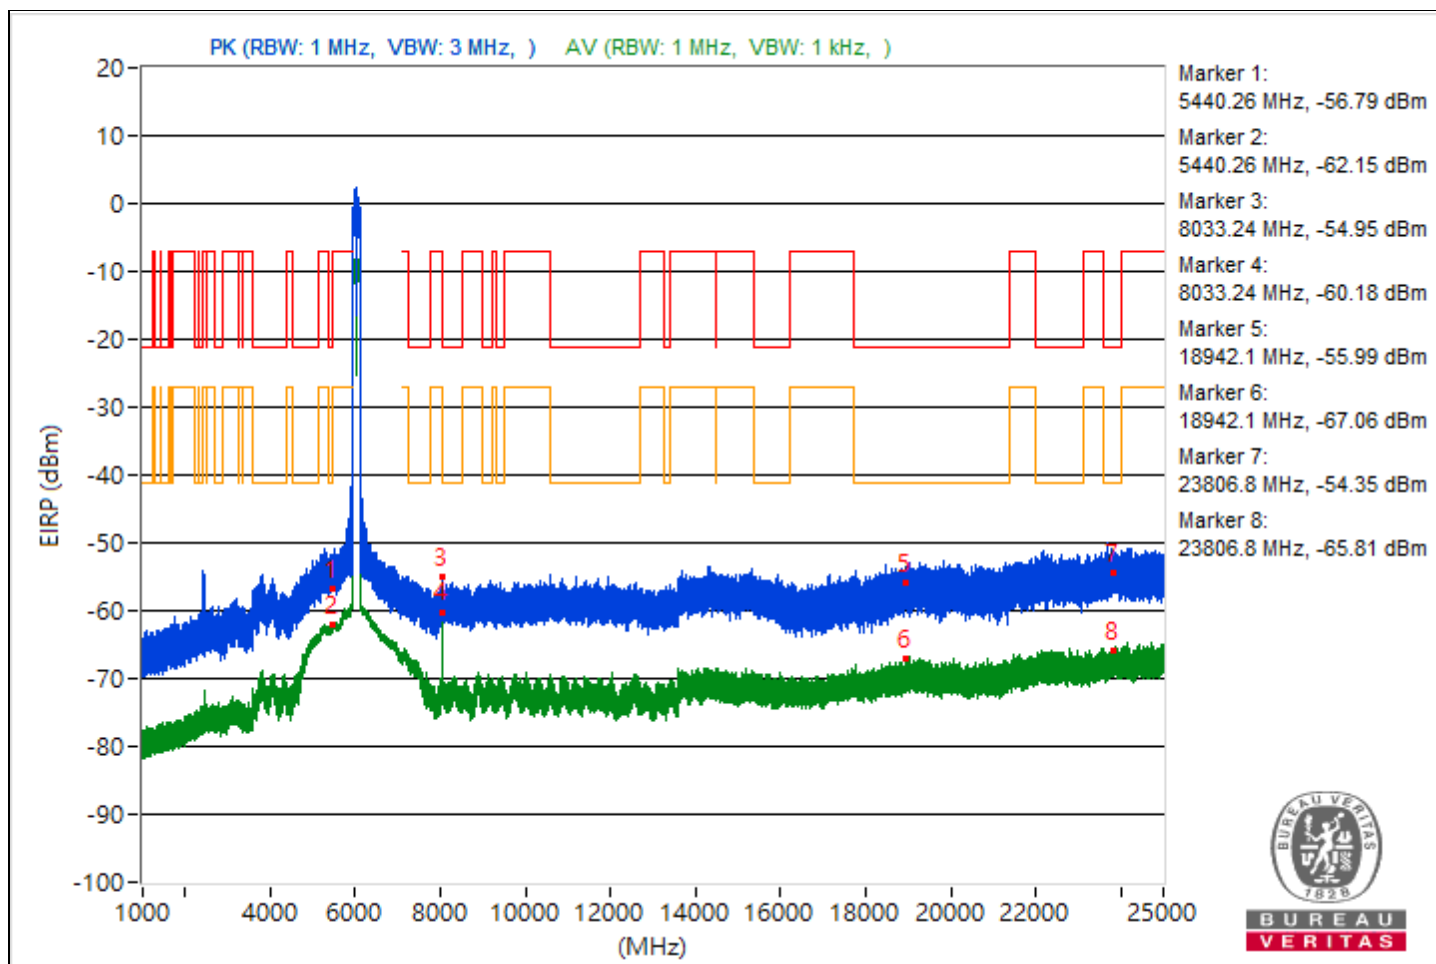


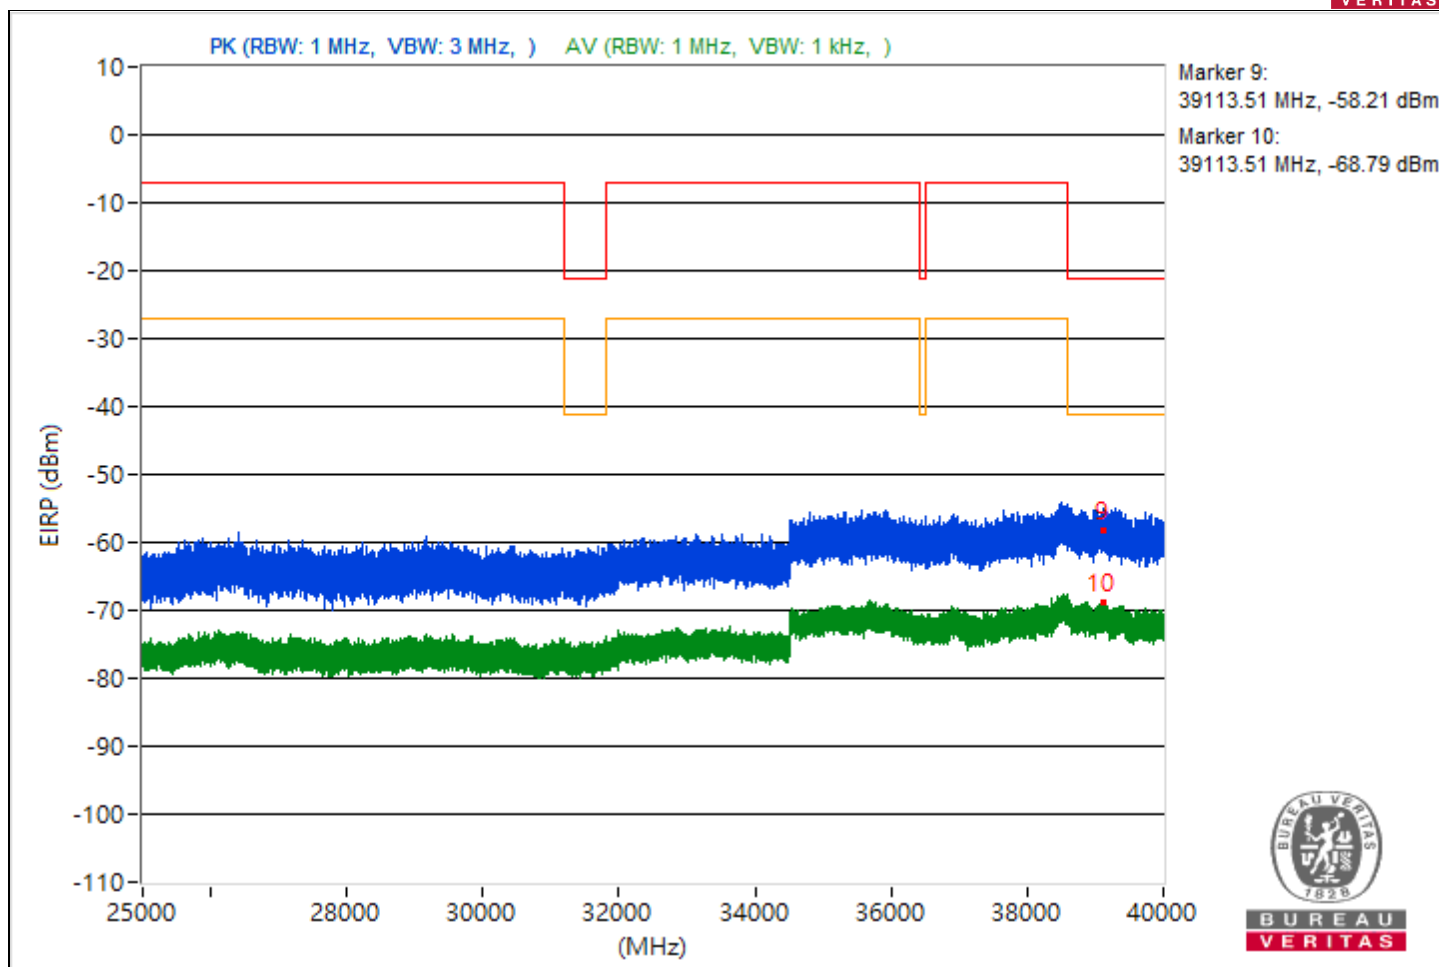


|                          |                   |             |                  |
|--------------------------|-------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT160) | Channel     | CH 47 : 6185 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz    | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 63% RH      | Tested By   | JyunChun.Lin     |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5456.12         | 40.37 PK                | 74             | -33.63      | -66.7                   | -65.53                  | 8.17                   | -54.89           |
| 2                            | 5456.12         | 32.66 AV                | 54             | -21.34      | -75.17                  | -72.73                  | 8.17                   | -62.6            |
| 3                            | 8246.67         | 39.45 PK                | 74             | -34.55      | -65.64                  | -68.95                  | 8.17                   | -55.81           |
| 4                            | 8246.67         | 30.88 AV                | 54             | -23.12      | -74.08                  | -77.81                  | 8.17                   | -64.38           |
| 5                            | 19420.1         | 40.18 PK                | 74             | -33.82      | -68.79                  | -64.67                  | 8.17                   | -55.08           |
| 6                            | 19420.1         | 28.77 AV                | 54             | -25.23      | -79.07                  | -76.62                  | 8.17                   | -66.49           |
| 7                            | 23826.9         | 41.8 PK                 | 74             | -32.2       | -64.76                  | -64.52                  | 8.17                   | -53.46           |
| 8                            | 23826.9         | 29.46 AV                | 54             | -24.54      | -79.95                  | -75.24                  | 8.17                   | -65.8            |
| 9                            | 38609.16        | 35.77 PK                | 74             | -38.23      | -70.57                  | -70.77                  | 8.17                   | -59.49           |
| 10                           | 38609.16        | 27.29 AV                | 54             | -26.71      | -78.06                  | -80.62                  | 8.17                   | -67.97           |

Note: Margin value = Emission Level - Limit value

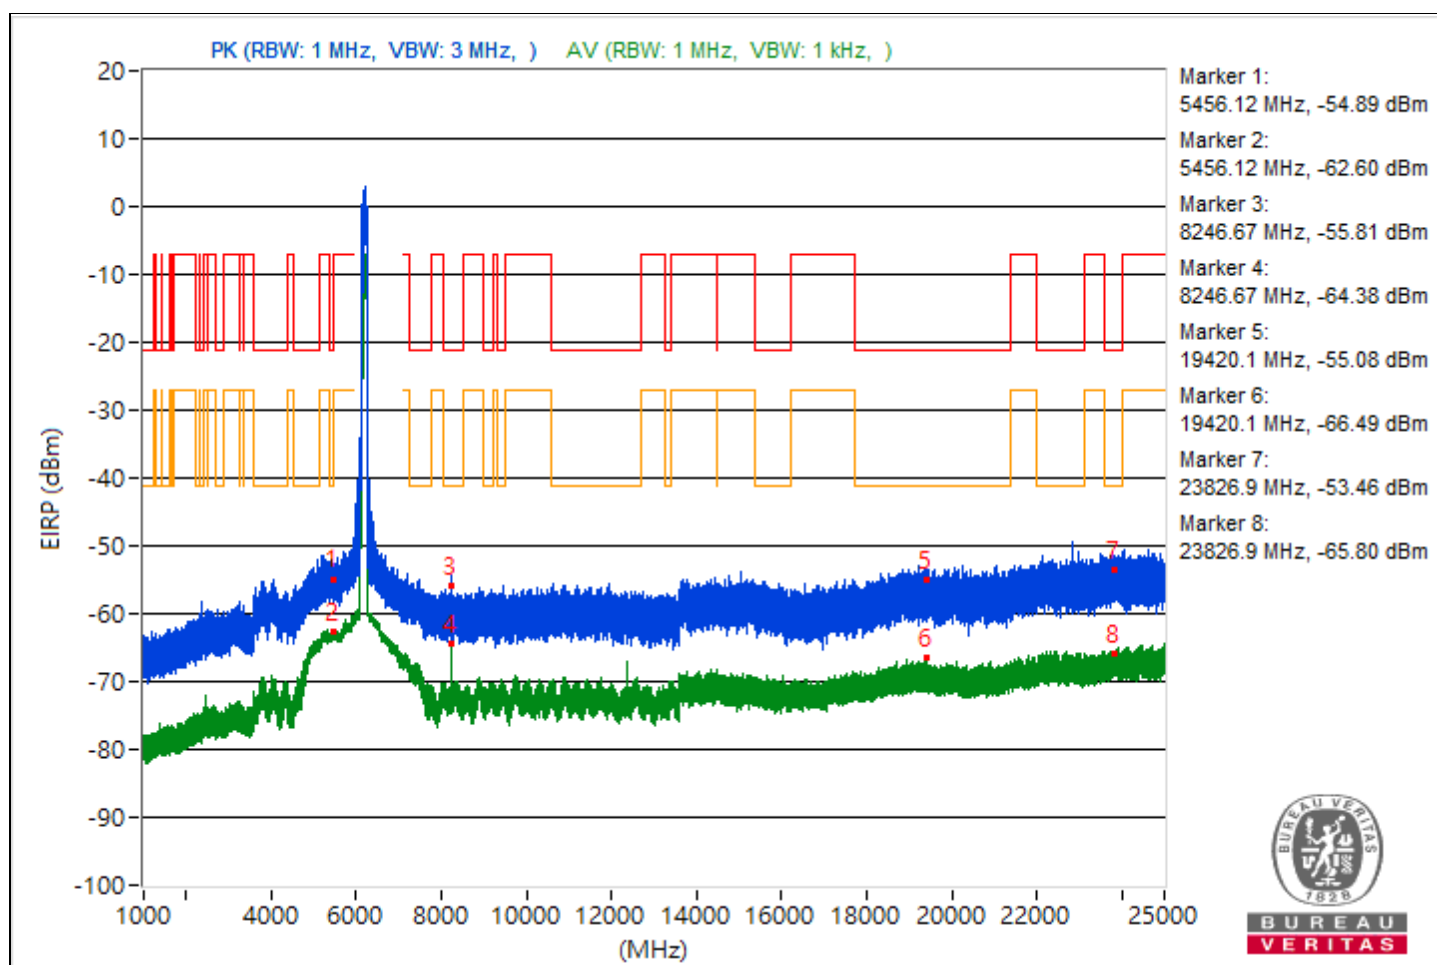


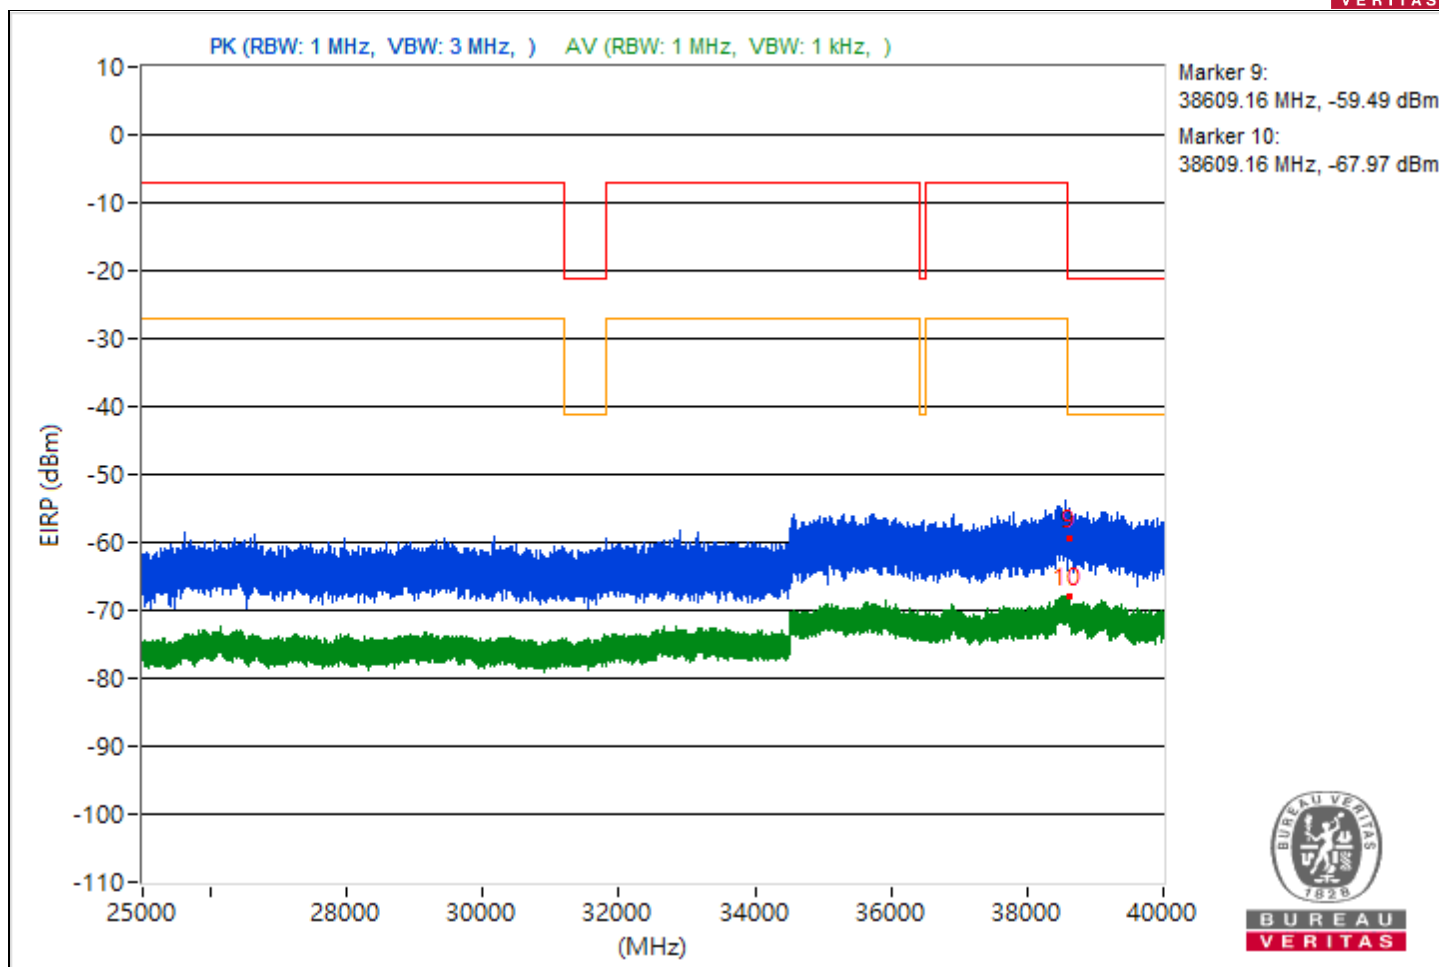


|                          |                   |             |                  |
|--------------------------|-------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT160) | Channel     | CH 79 : 6345 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz    | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 63% RH      | Tested By   | JyunChun.Lin     |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5420.19         | 41.03 PK                | 74             | -32.97      | -66.03                  | -64.87                  | 8.17                   | -54.23           |
| 2                            | 5420.19         | 32.39 AV                | 54             | -21.61      | -74.96                  | -73.29                  | 8.17                   | -62.87           |
| 3                            | 12689.78        | 36.83 PK                | 74             | -37.17      | -71.55                  | -68.27                  | 8.17                   | -58.43           |
| 4                            | 12689.78        | 30.45 AV                | 54             | -23.55      | -85.48                  | -73.23                  | 8.17                   | -64.81           |
| 5                            | 19060.6         | 37.31 PK                | 74             | -36.69      | -68.12                  | -70.45                  | 8.17                   | -57.95           |
| 6                            | 19060.6         | 28.54 AV                | 54             | -25.46      | -76.72                  | -79.52                  | 8.17                   | -66.72           |
| 7                            | 23873.2         | 41.81 PK                | 74             | -32.19      | -64.69                  | -64.58                  | 8.17                   | -53.45           |
| 8                            | 23873.2         | 30.52 AV                | 54             | -23.48      | -75.22                  | -76.76                  | 8.17                   | -64.74           |
| 9                            | 38603.29        | 37.18 PK                | 74             | -36.82      | -68.26                  | -70.58                  | 8.17                   | -58.08           |
| 10                           | 38603.29        | 26.67 AV                | 54             | -27.33      | -81.35                  | -78.62                  | 8.17                   | -68.59           |

Note: Margin value = Emission Level - Limit value

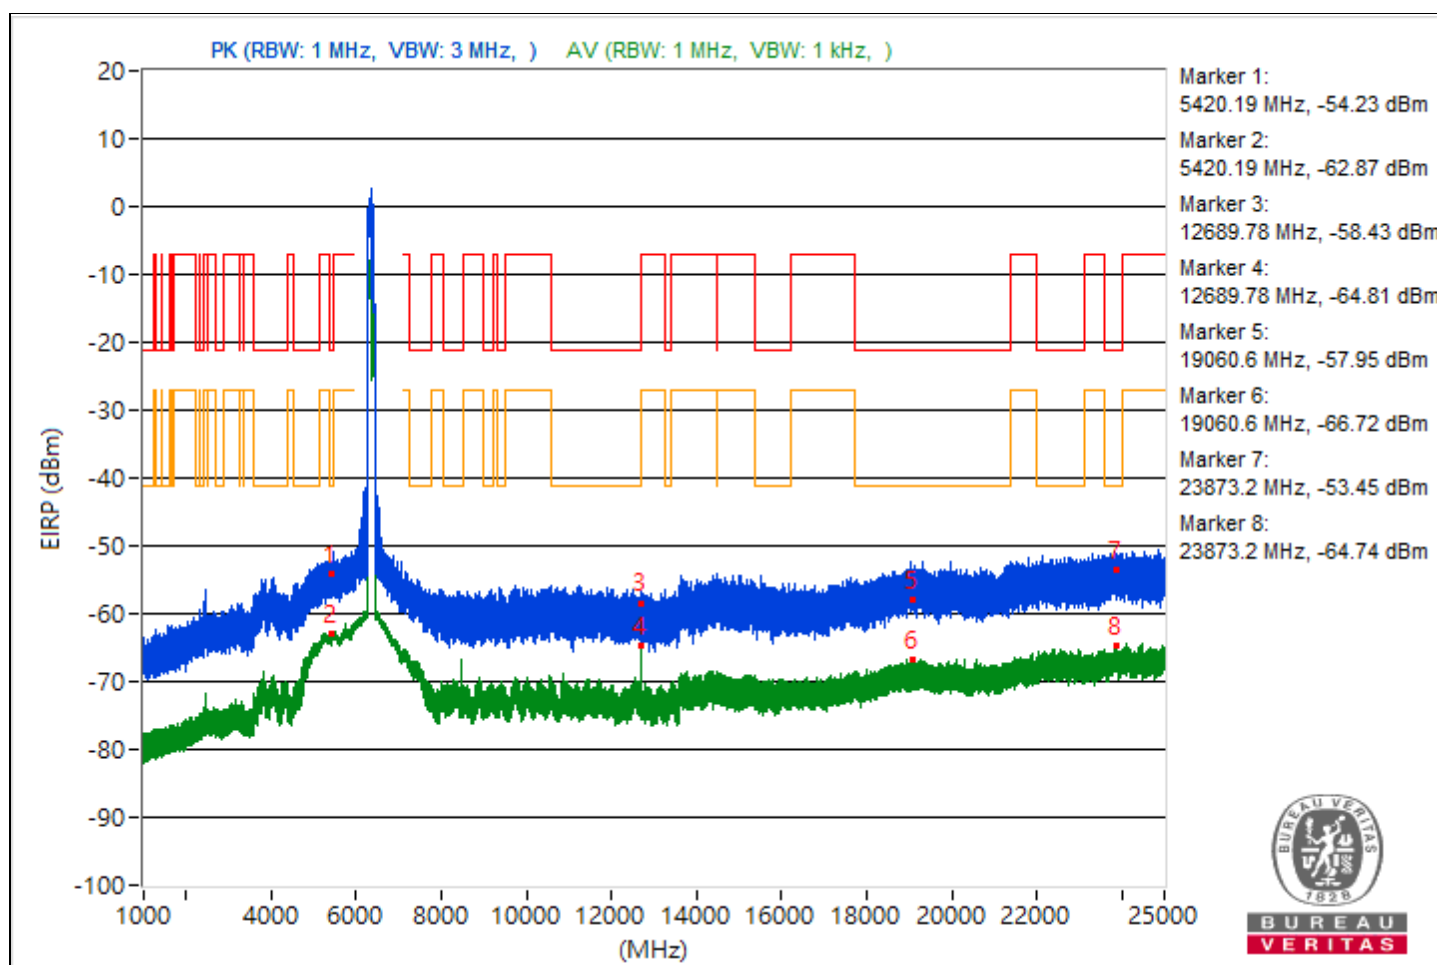

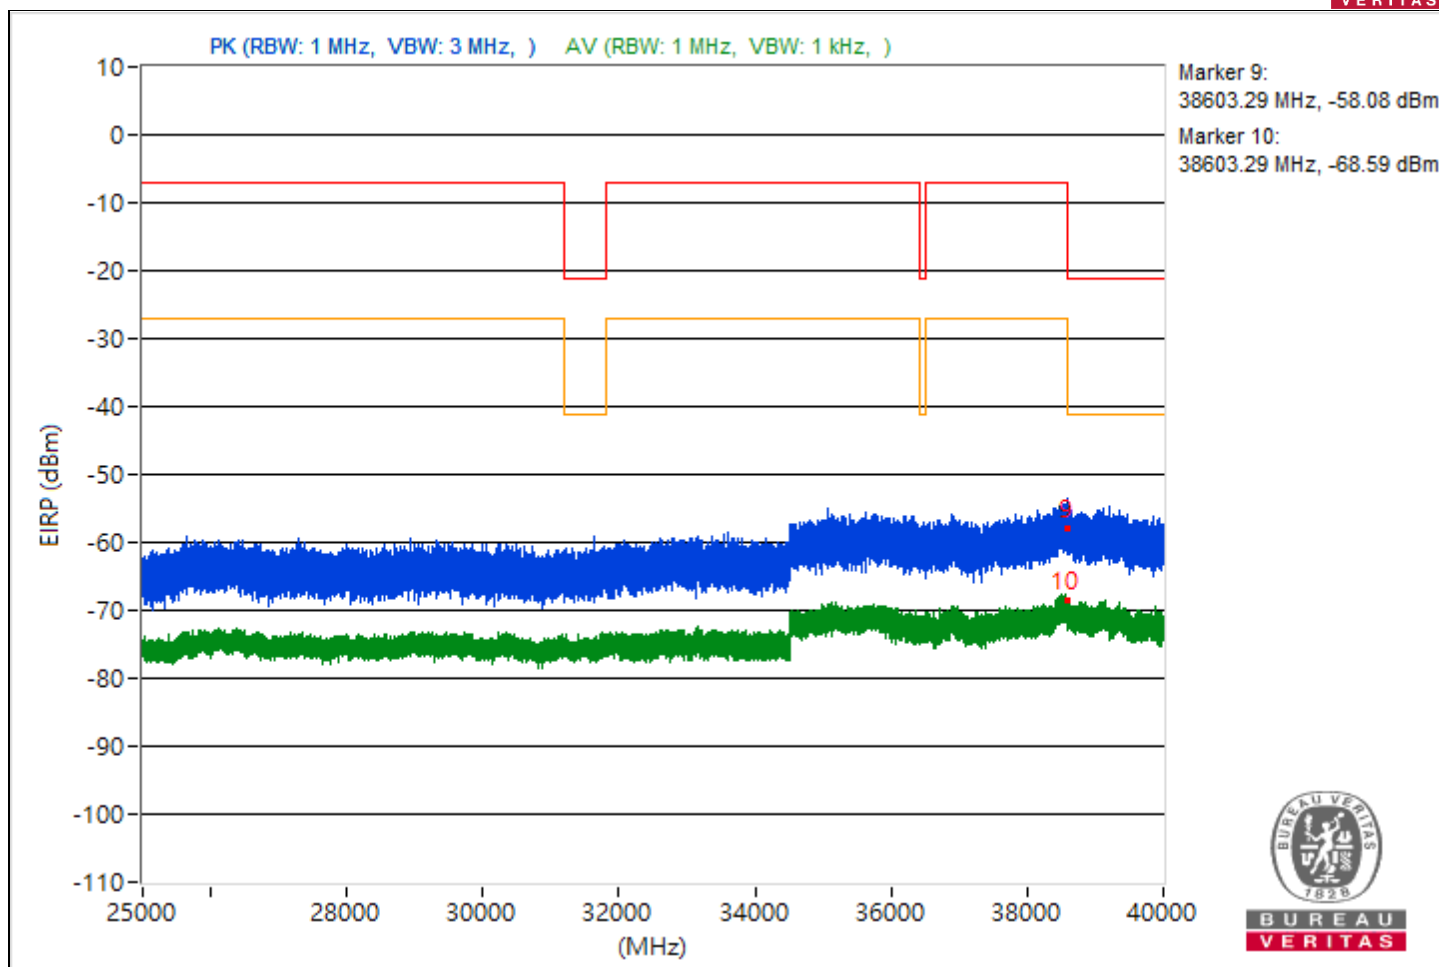





|                          |                   |             |                   |
|--------------------------|-------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT160) | Channel     | CH 143 : 6665 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz    | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH      | Tested By   | JyunChun.Lin      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5444.3          | 40.16 PK                | 74             | -33.84      | -67.4                   | -65.38                  | 8.17                   | -55.1            |
| 2                            | 5444.3          | 33.02 AV                | 54             | -20.98      | -74.83                  | -72.36                  | 8.17                   | -62.24           |
| 3                            | 13329.96        | 41.42 PK                | 74             | -32.58      | -70.53                  | -62.67                  | 8.17                   | -53.84           |
| 4                            | 13329.96        | 37.04 AV                | 54             | -16.96      | -76.52                  | -66.84                  | 8.17                   | -58.22           |
| 5                            | 21399.3         | 35.92 PK                | 74             | -38.08      | -70.42                  | -70.63                  | 8.17                   | -59.34           |
| 6                            | 21399.3         | 28 AV                   | 54             | -26         | -80.58                  | -77.01                  | 8.17                   | -67.26           |
| 7                            | 23897.6         | 40.14 PK                | 74             | -33.86      | -66.26                  | -66.33                  | 8.17                   | -55.12           |
| 8                            | 23897.6         | 30.06 AV                | 54             | -23.94      | -77.24                  | -75.66                  | 8.17                   | -65.2            |
| 9                            | 39097.07        | 36.94 PK                | 74             | -37.06      | -67.85                  | -72.18                  | 8.17                   | -58.32           |
| 10                           | 39097.07        | 26.67 AV                | 54             | -27.33      | -81.89                  | -78.36                  | 8.17                   | -68.59           |

Note: Margin value = Emission Level - Limit value

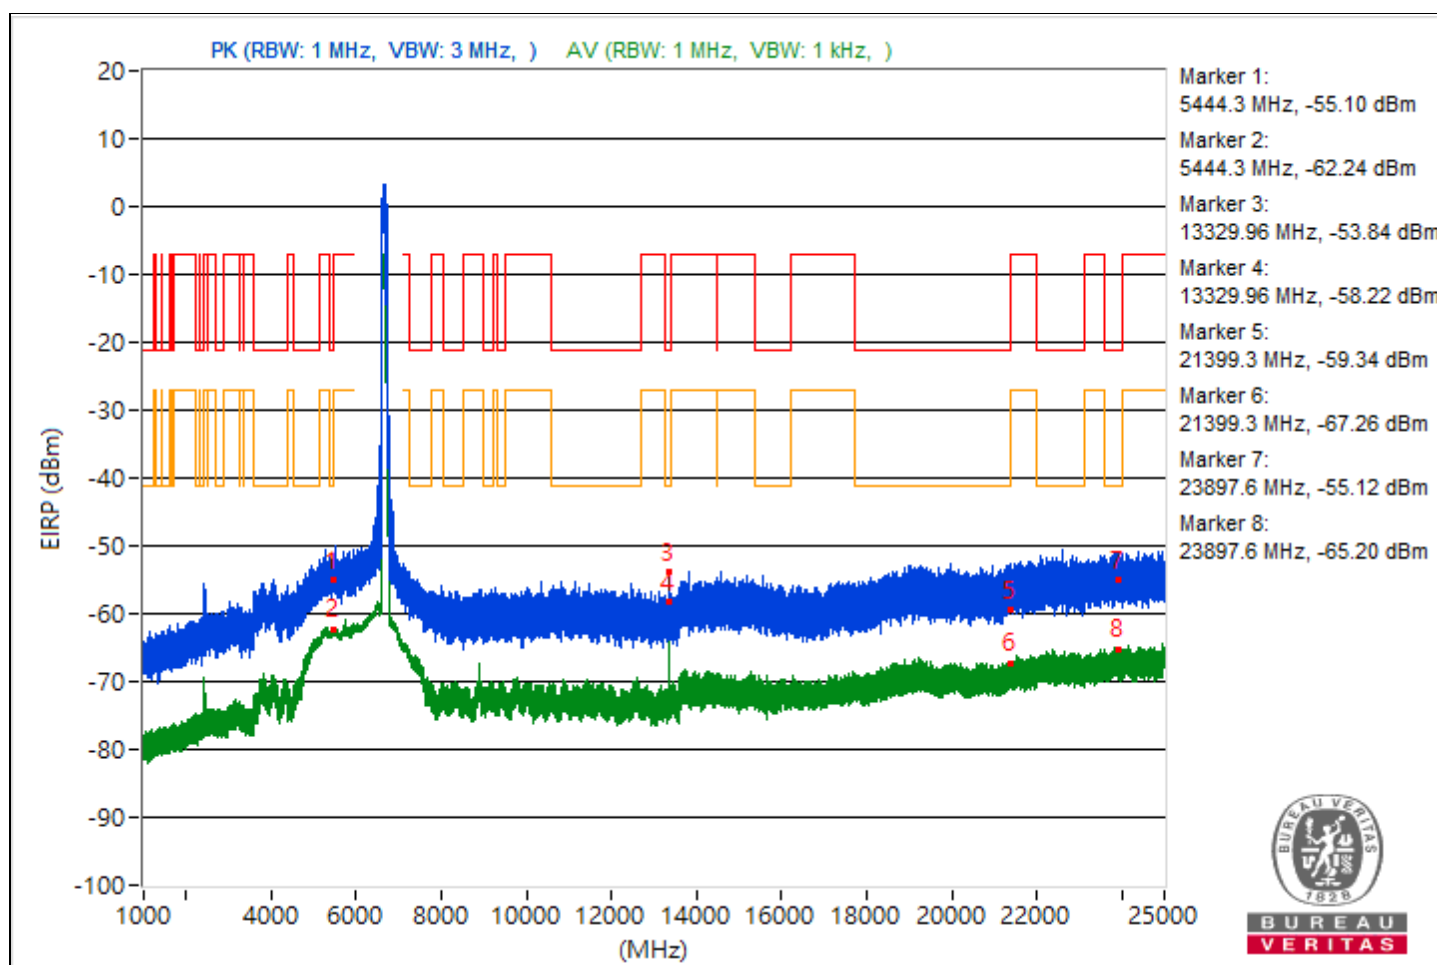


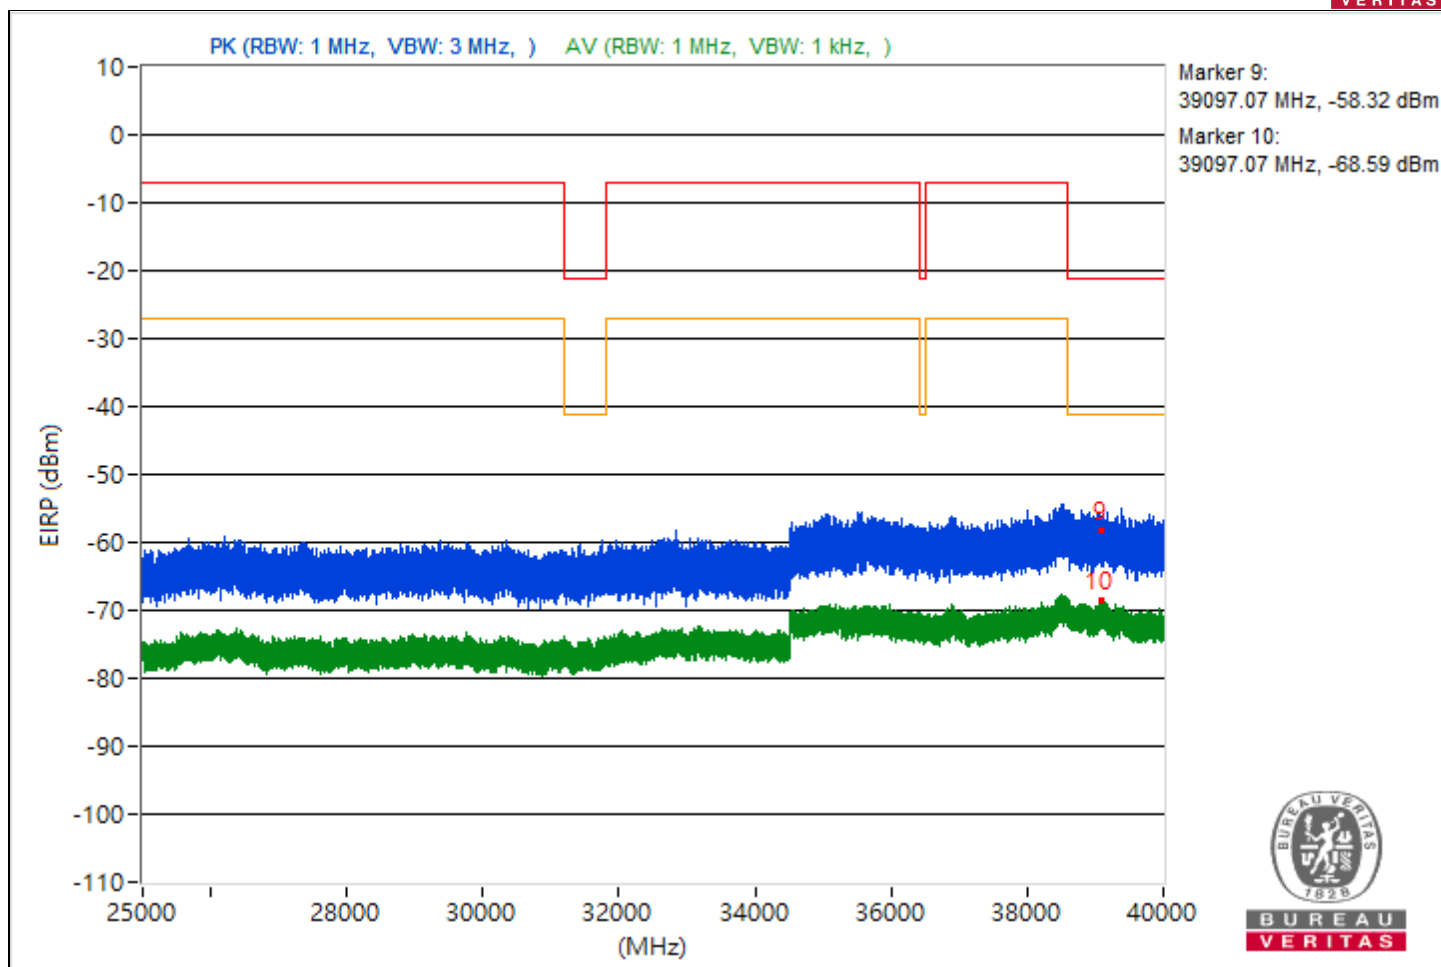


|                          |                   |             |                  |
|--------------------------|-------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT320) | Channel     | CH 31 : 6105 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz    | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 63% RH      | Tested By   | JyunChun.Lin     |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4884.07         | 51.36 PK                | 74             | -22.64      | -58.25                  | -53.27                  | 8.17                   | -43.9            |
| 2                            | 4884.07         | 49.73 AV                | 54             | -4.27       | -59.65                  | -54.98                  | 8.17                   | -45.53           |
| 3                            | 7325.98         | 49.21 PK                | 74             | -24.79      | -55.05                  | -61.81                  | 8.17                   | -46.05           |
| 4                            | 7325.98         | 48.23 AV                | 54             | -5.77       | -55.56                  | -66.17                  | 8.17                   | -47.03           |
| 5                            | 21371           | 38.82 PK                | 74             | -35.18      | -68.44                  | -66.92                  | 8.17                   | -56.44           |
| 6                            | 21371           | 29.14 AV                | 54             | -24.86      | -75.64                  | -80.02                  | 8.17                   | -66.12           |
| 7                            | 23850.8         | 39.6 PK                 | 74             | -34.4       | -67.25                  | -66.47                  | 8.17                   | -55.66           |
| 8                            | 23850.8         | 31.66 AV                | 54             | -22.34      | -73.47                  | -76.68                  | 8.17                   | -63.6            |
| 9                            | 39127.02        | 35.52 PK                | 74             | -38.48      | -71.97                  | -70.07                  | 8.17                   | -59.74           |
| 10                           | 39127.02        | 27.14 AV                | 54             | -26.86      | -81.24                  | -77.97                  | 8.17                   | -68.12           |

Note: Margin value = Emission Level - Limit value

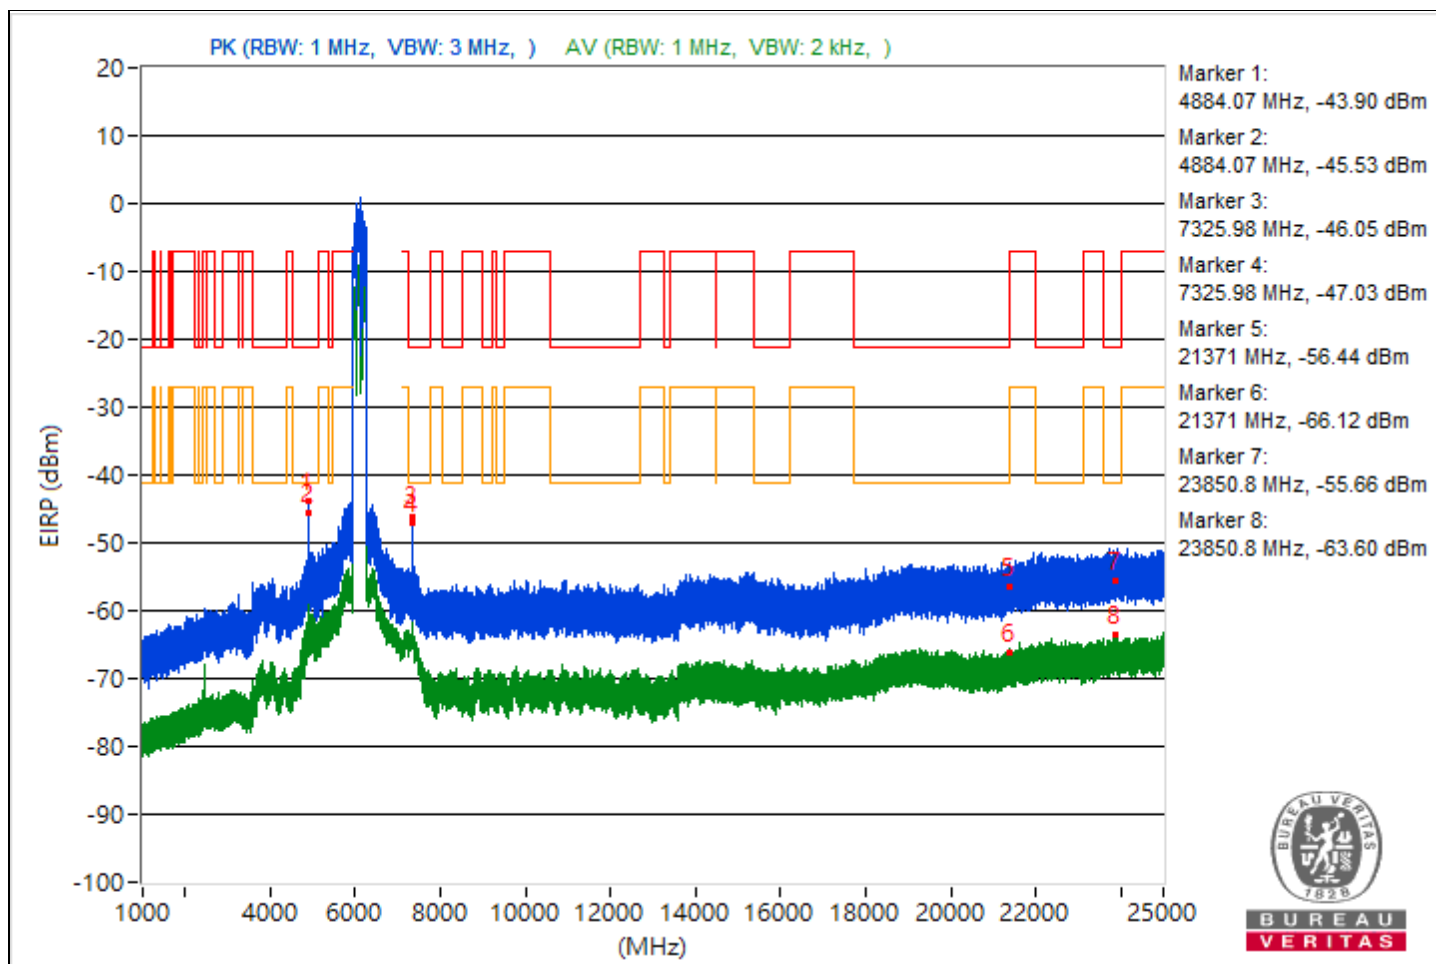


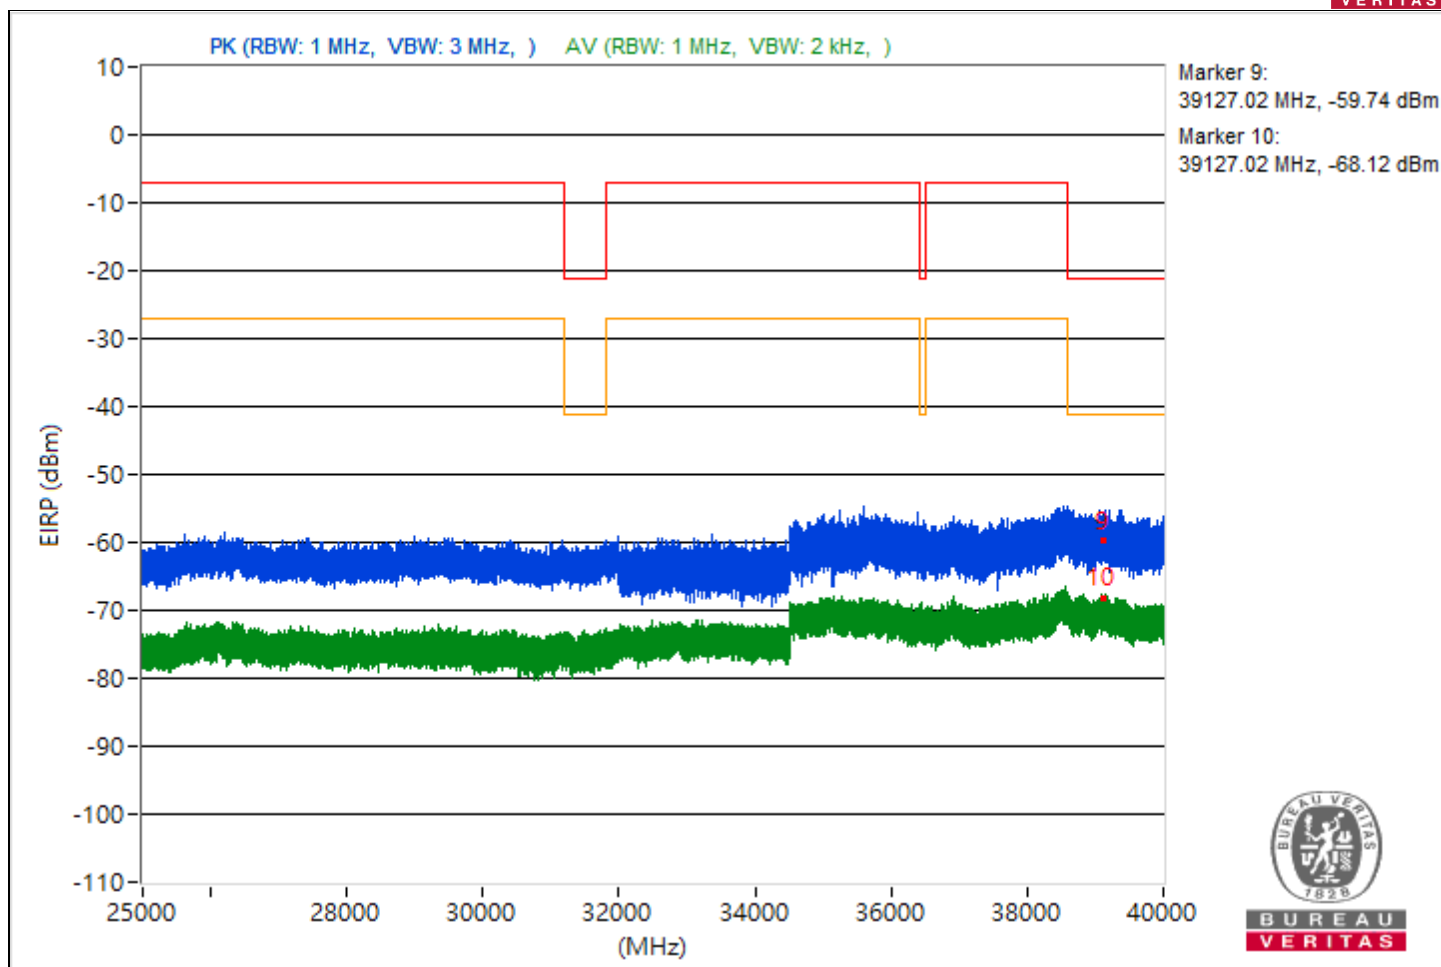


|                          |                   |             |                  |
|--------------------------|-------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT320) | Channel     | CH 63 : 6265 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz    | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 63% RH      | Tested By   | JyunChun.Lin     |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5440.72         | 40.48 PK                | 74             | -33.52      | -66                     | -65.92                  | 8.17                   | -54.78           |
| 2                            | 5440.72         | 34.93 AV                | 54             | -19.07      | -72.9                   | -70.45                  | 8.17                   | -60.33           |
| 3                            | 7257.77         | 37.33 PK                | 74             | -36.67      | -67.87                  | -70.85                  | 8.17                   | -57.93           |
| 4                            | 7257.77         | 30.46 AV                | 54             | -23.54      | -74.29                  | -78.75                  | 8.17                   | -64.8            |
| 5                            | 19384.4         | 40.2 PK                 | 74             | -33.8       | -66.14                  | -66.35                  | 8.17                   | -55.06           |
| 6                            | 19384.4         | 29.83 AV                | 54             | -24.17      | -76.04                  | -77.26                  | 8.17                   | -65.43           |
| 7                            | 22189.4         | 38.84 PK                | 74             | -35.16      | -67.85                  | -67.37                  | 8.17                   | -56.42           |
| 8                            | 22189.4         | 31.03 AV                | 54             | -22.97      | -73.86                  | -77.85                  | 8.17                   | -64.23           |
| 9                            | 38857.07        | 36.91 PK                | 74             | -37.09      | -69.56                  | -69.49                  | 8.17                   | -58.35           |
| 10                           | 38857.07        | 27.52 AV                | 54             | -26.48      | -81.52                  | -77.3                   | 8.17                   | -67.74           |

Note: Margin value = Emission Level - Limit value

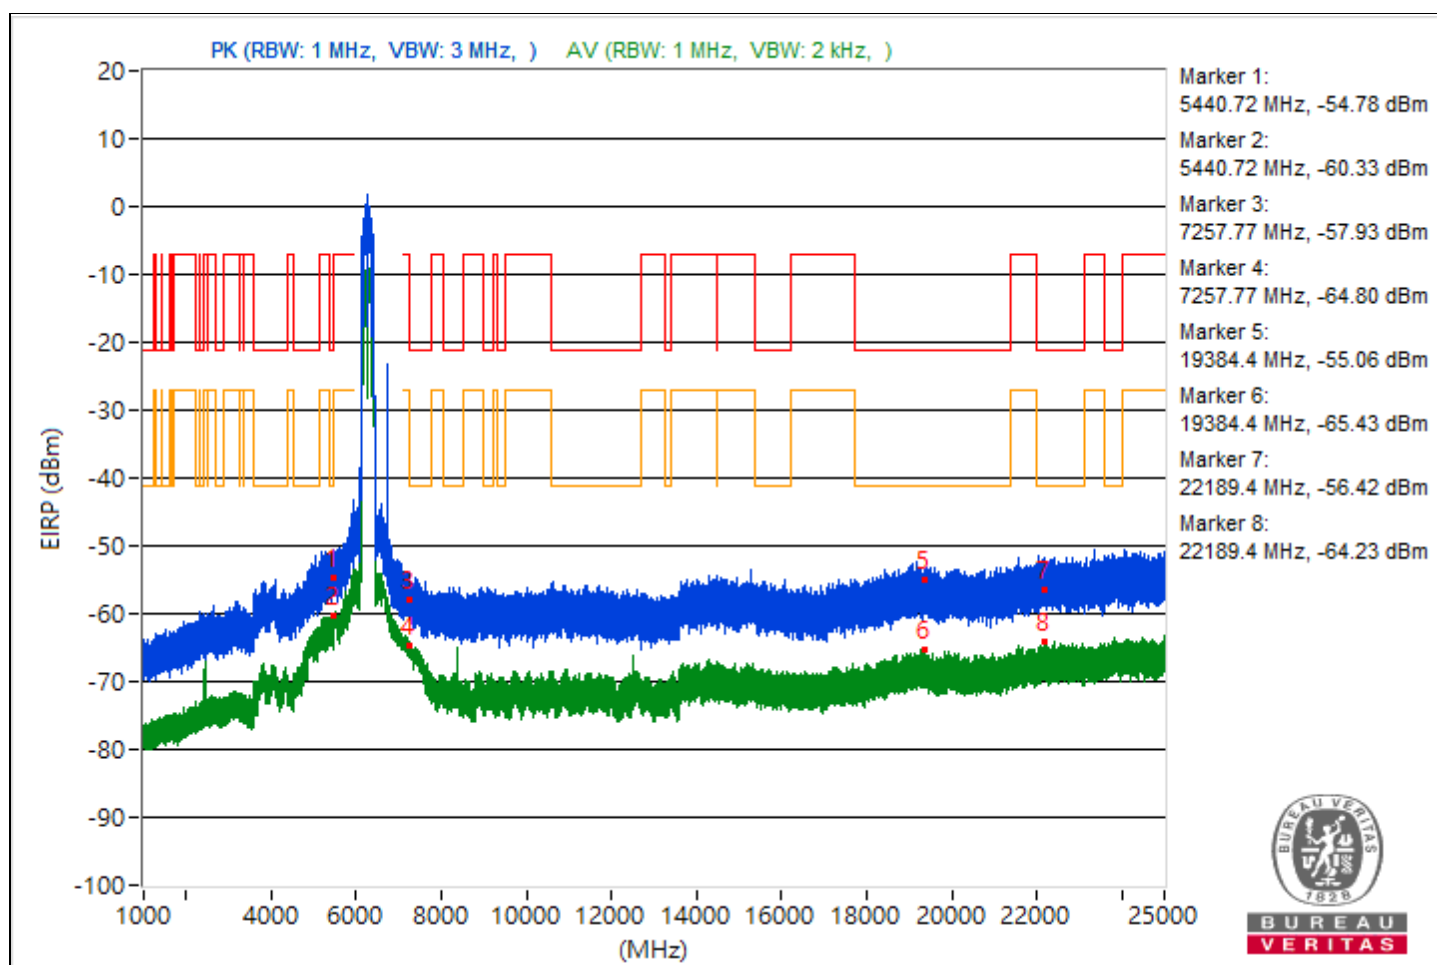


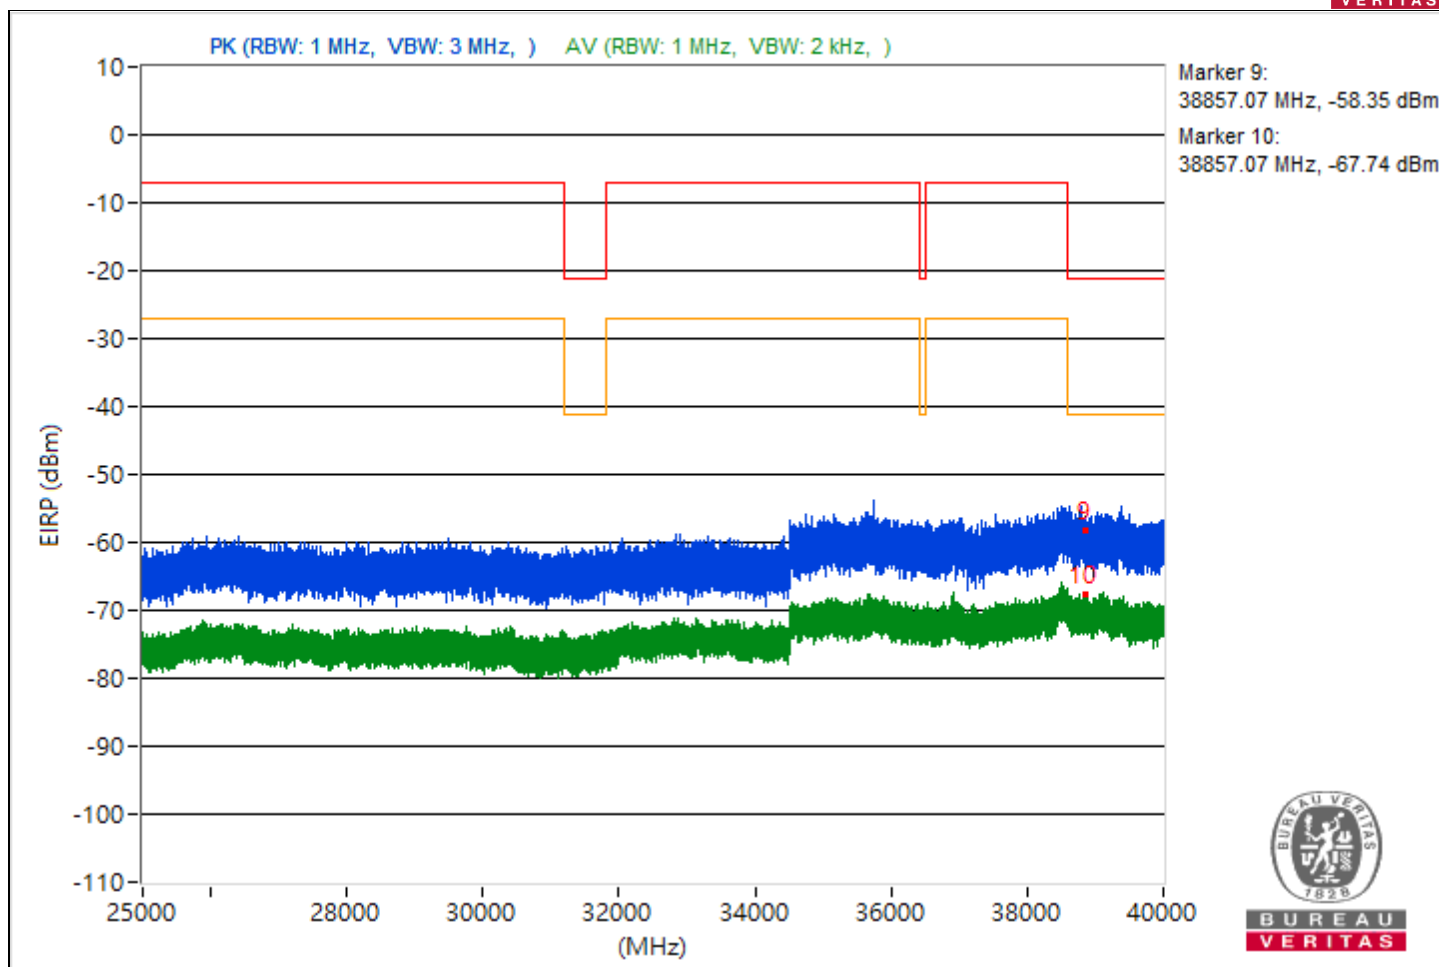


|                          |                             |             |                 |
|--------------------------|-----------------------------|-------------|-----------------|
| RF Mode                  | 802.11be (EHT20) 26-tone RU | Channel     | CH 2 : 5935 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz              | Input Power | 3.3 Vdc         |
| Environmental Conditions | 24°C, 63% RH                | Tested By   | JyunChun.Lin    |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5440.33         | 37.14 PK                | 74             | -36.86      | -68.59                  | -70.16                  | 8.17                   | -58.12           |
| 2                            | 5440.33         | 26.73 AV                | 54             | -27.27      | -78.89                  | -80.74                  | 8.17                   | -68.53           |
| 3                            | 14482.67        | 36.89 PK                | 74             | -37.11      | -68.74                  | -70.54                  | 8.17                   | -58.37           |
| 4                            | 14482.67        | 26.46 AV                | 54             | -27.54      | -80.83                  | -79.27                  | 8.17                   | -68.8            |
| 5                            | 19217           | 38.78 PK                | 74             | -35.22      | -68.81                  | -66.75                  | 8.17                   | -56.48           |
| 6                            | 19217           | 28.32 AV                | 54             | -25.68      | -76.84                  | -79.92                  | 8.17                   | -66.94           |
| 7                            | 23778.7         | 41.68 PK                | 74             | -32.32      | -64.62                  | -64.89                  | 8.17                   | -53.58           |
| 8                            | 23778.7         | 30.02 AV                | 54             | -23.98      | -74.89                  | -78.81                  | 8.17                   | -65.24           |
| 9                            | 39140.36        | 34.22 PK                | 74             | -39.78      | -72.48                  | -71.97                  | 8.17                   | -61.04           |
| 10                           | 39140.36        | 26.89 AV                | 54             | -27.11      | -78.92                  | -80.28                  | 8.17                   | -68.37           |

Note: Margin value = Emission Level - Limit value

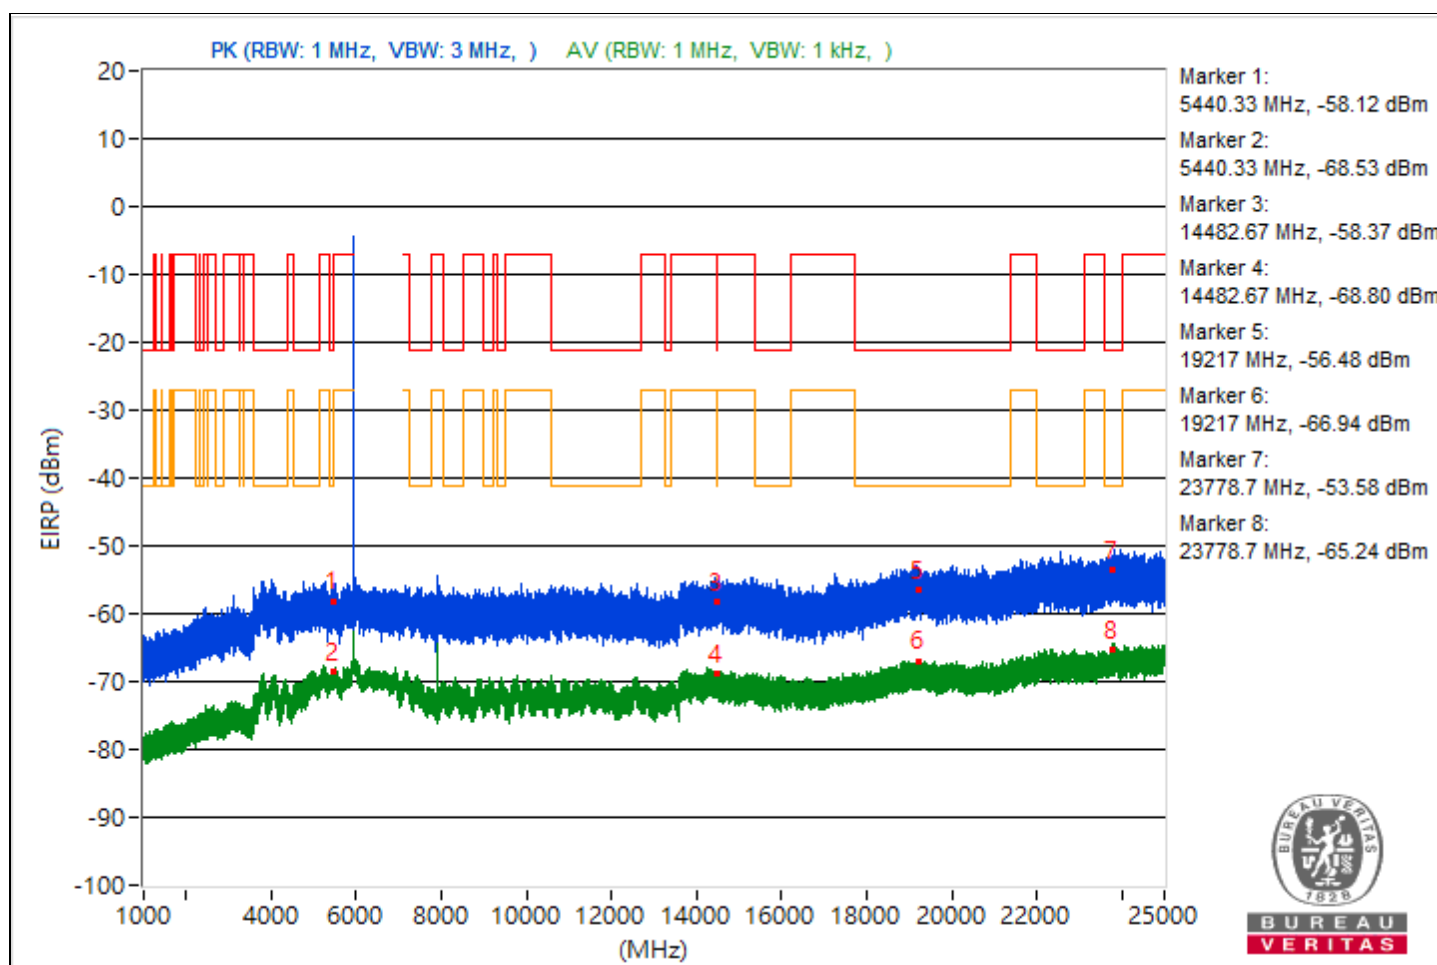

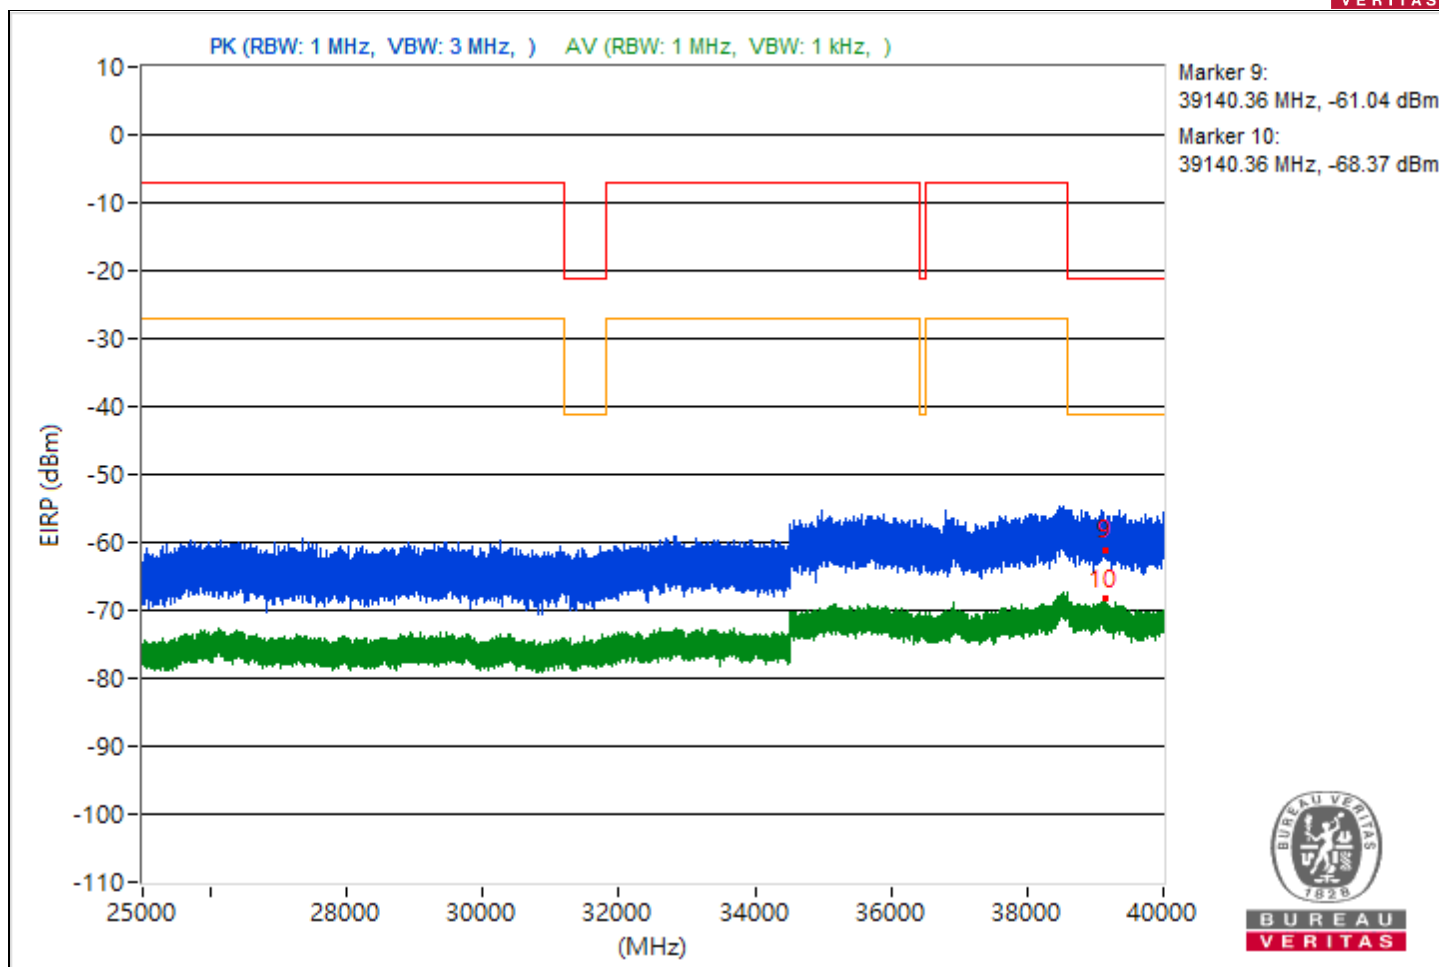





|                          |                             |             |                 |
|--------------------------|-----------------------------|-------------|-----------------|
| RF Mode                  | 802.11be (EHT20) 26-tone RU | Channel     | CH 1 : 5955 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz              | Input Power | 3.3 Vdc         |
| Environmental Conditions | 24°C, 63% RH                | Tested By   | JyunChun.Lin    |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5421.82         | 34.17 PK                | 74             | -39.83      | -73.45                  | -71.35                  | 8.17                   | -61.09           |
| 2                            | 5421.82         | 25.87 AV                | 54             | -28.13      | -79.53                  | -81.93                  | 8.17                   | -69.39           |
| 3                            | 14474.93        | 37.68 PK                | 74             | -36.32      | -67.99                  | -69.71                  | 8.17                   | -57.58           |
| 4                            | 14474.93        | 26.45 AV                | 54             | -27.55      | -80.4                   | -79.62                  | 8.17                   | -68.81           |
| 5                            | 19351.5         | 38.65 PK                | 74             | -35.35      | -67.71                  | -67.87                  | 8.17                   | -56.61           |
| 6                            | 19351.5         | 28.59 AV                | 54             | -25.41      | -76.82                  | -79.21                  | 8.17                   | -66.67           |
| 7                            | 23883.8         | 41.45 PK                | 74             | -32.55      | -64.37                  | -65.72                  | 8.17                   | -53.81           |
| 8                            | 23883.8         | 30.76 AV                | 54             | -23.24      | -74.56                  | -77.2                   | 8.17                   | -64.5            |
| 9                            | 38627.56        | 37.21 PK                | 74             | -36.79      | -69.05                  | -69.42                  | 8.17                   | -58.05           |
| 10                           | 38627.56        | 26.7 AV                 | 54             | -27.3       | -78.91                  | -80.77                  | 8.17                   | -68.56           |

Note: Margin value = Emission Level - Limit value

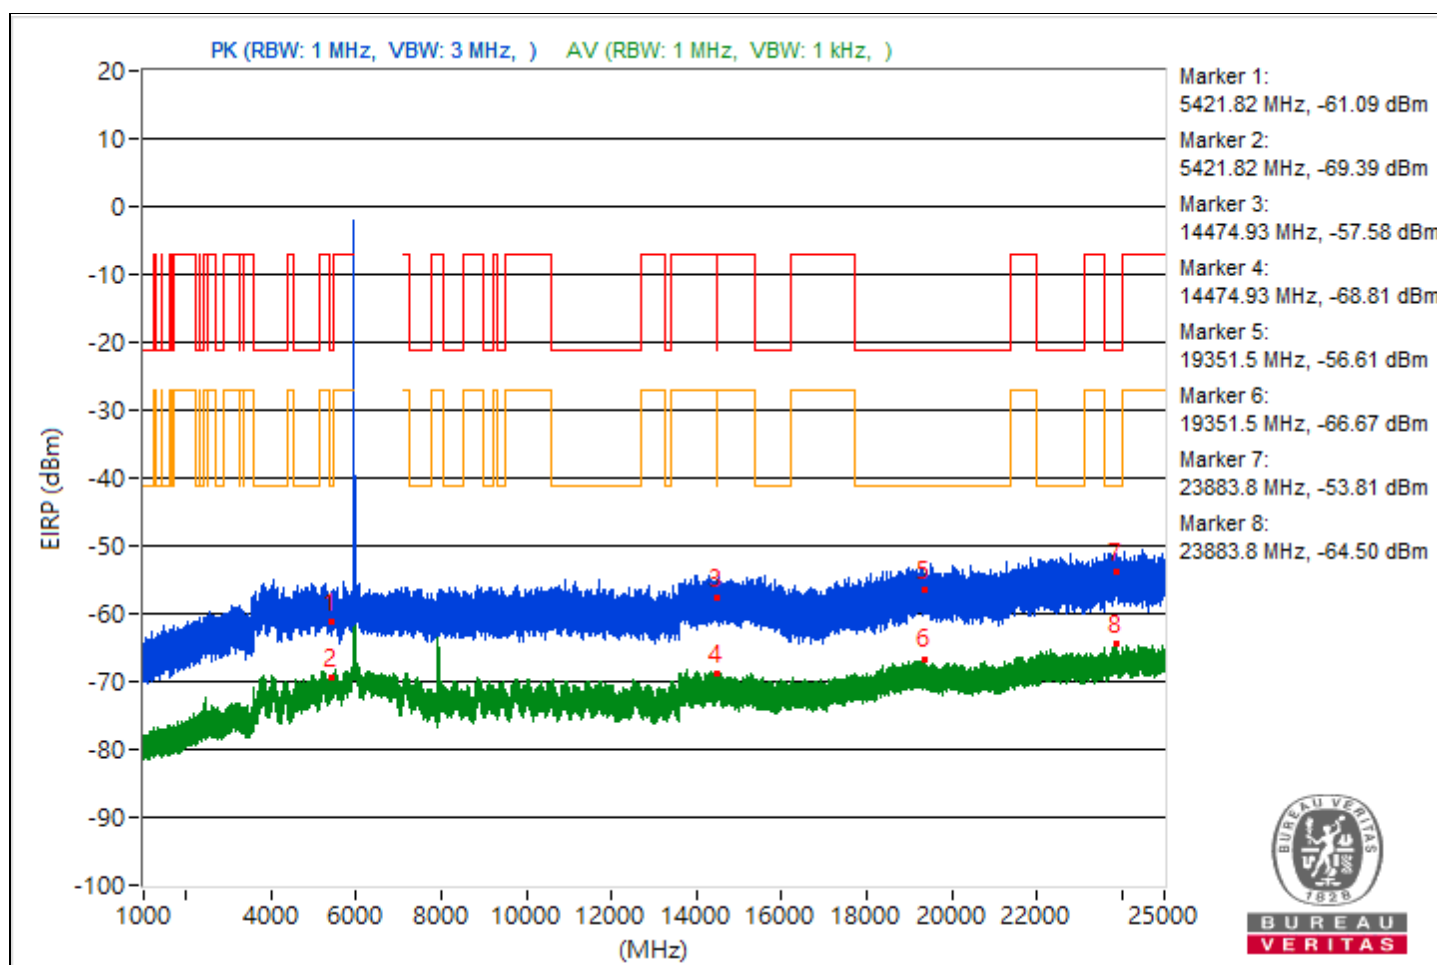


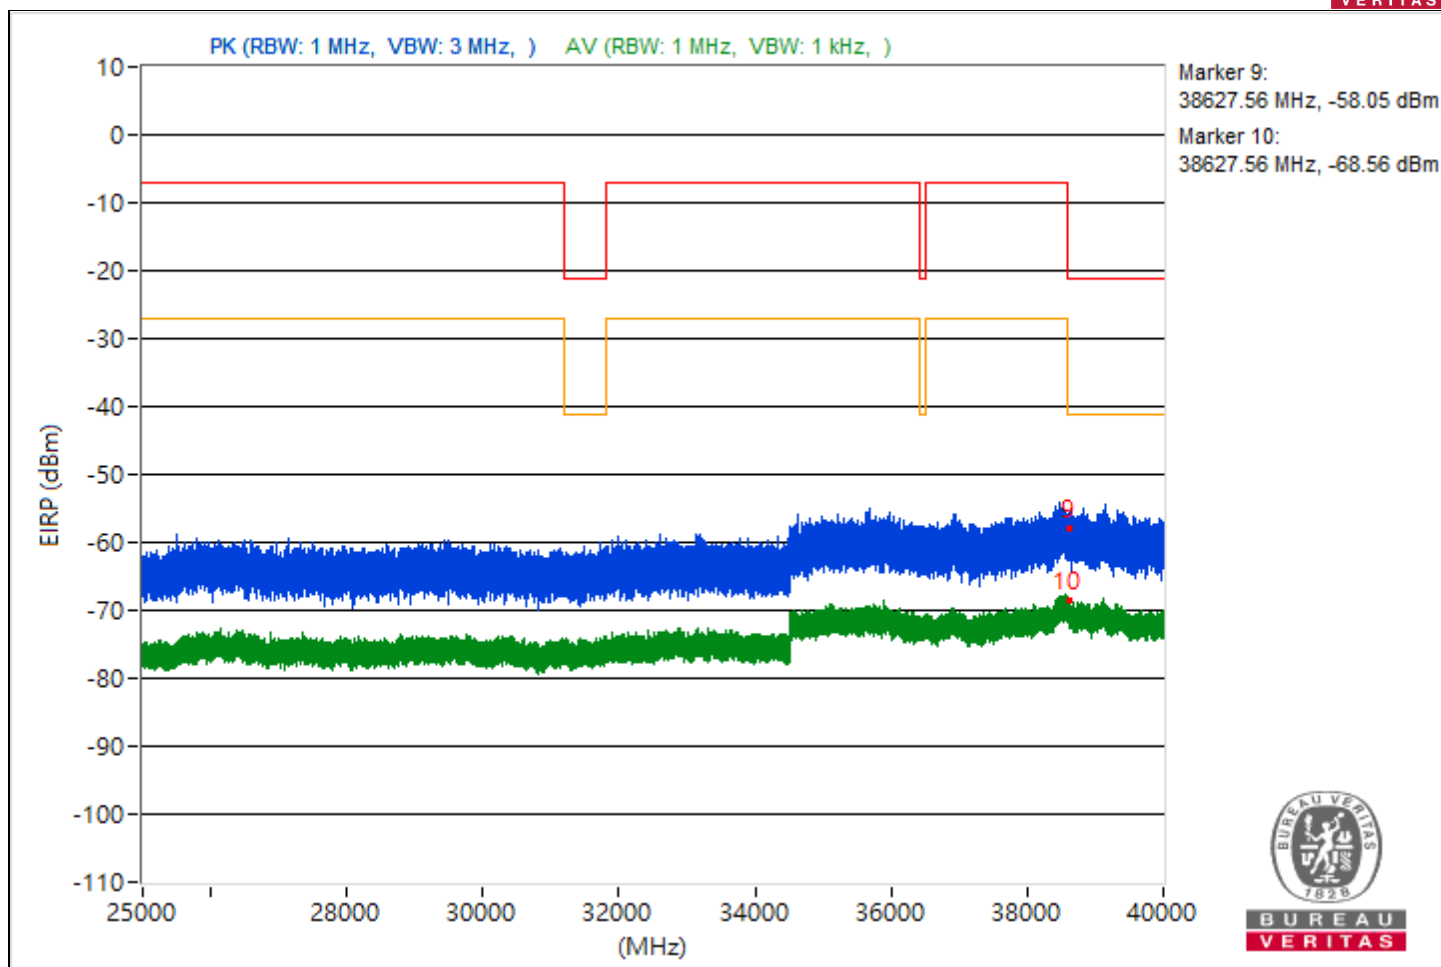


|                          |                             |             |                  |
|--------------------------|-----------------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT20) 26-tone RU | Channel     | CH 45 : 6175 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz              | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 63% RH                | Tested By   | JyunChun.Lin     |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4047.8          | 37.47 PK                | 74             | -36.53      | -69.89                  | -68.2                   | 8.17                   | -57.79           |
| 2                            | 4047.8          | 25.56 AV                | 54             | -28.44      | -79.68                  | -82.55                  | 8.17                   | -69.7            |
| 3                            | 8233.24         | 37.24 PK                | 74             | -36.76      | -68.92                  | -69.51                  | 8.17                   | -58.02           |
| 4                            | 8233.24         | 30.32 AV                | 54             | -23.68      | -75.84                  | -76.41                  | 8.17                   | -64.94           |
| 5                            | 19455           | 38.41 PK                | 74             | -35.59      | -69.17                  | -67.13                  | 8.17                   | -56.85           |
| 6                            | 19455           | 27.99 AV                | 54             | -26.01      | -76.97                  | -80.72                  | 8.17                   | -67.27           |
| 7                            | 23797.9         | 40 PK                   | 74             | -34         | -65.04                  | -68.5                   | 8.17                   | -55.26           |
| 8                            | 23797.9         | 29.78 AV                | 54             | -24.22      | -78.71                  | -75.28                  | 8.17                   | -65.48           |
| 9                            | 38606.31        | 39.06 PK                | 74             | -34.94      | -67.64                  | -67.14                  | 8.17                   | -56.2            |
| 10                           | 38606.31        | 26.6 AV                 | 54             | -27.4       | -79.06                  | -80.78                  | 8.17                   | -68.66           |

Note: Margin value = Emission Level - Limit value

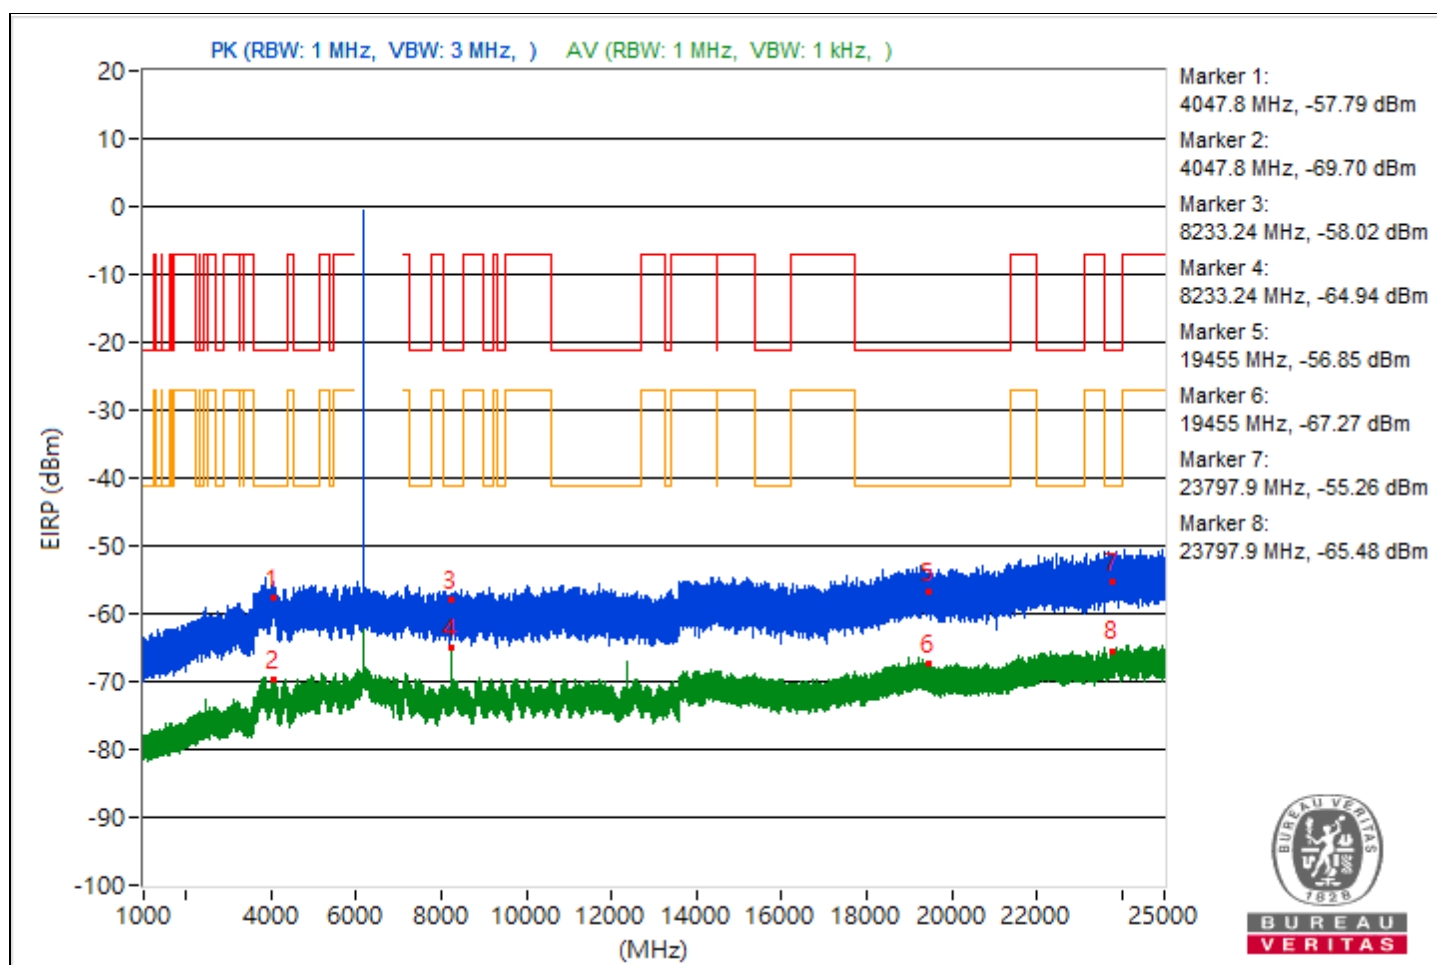


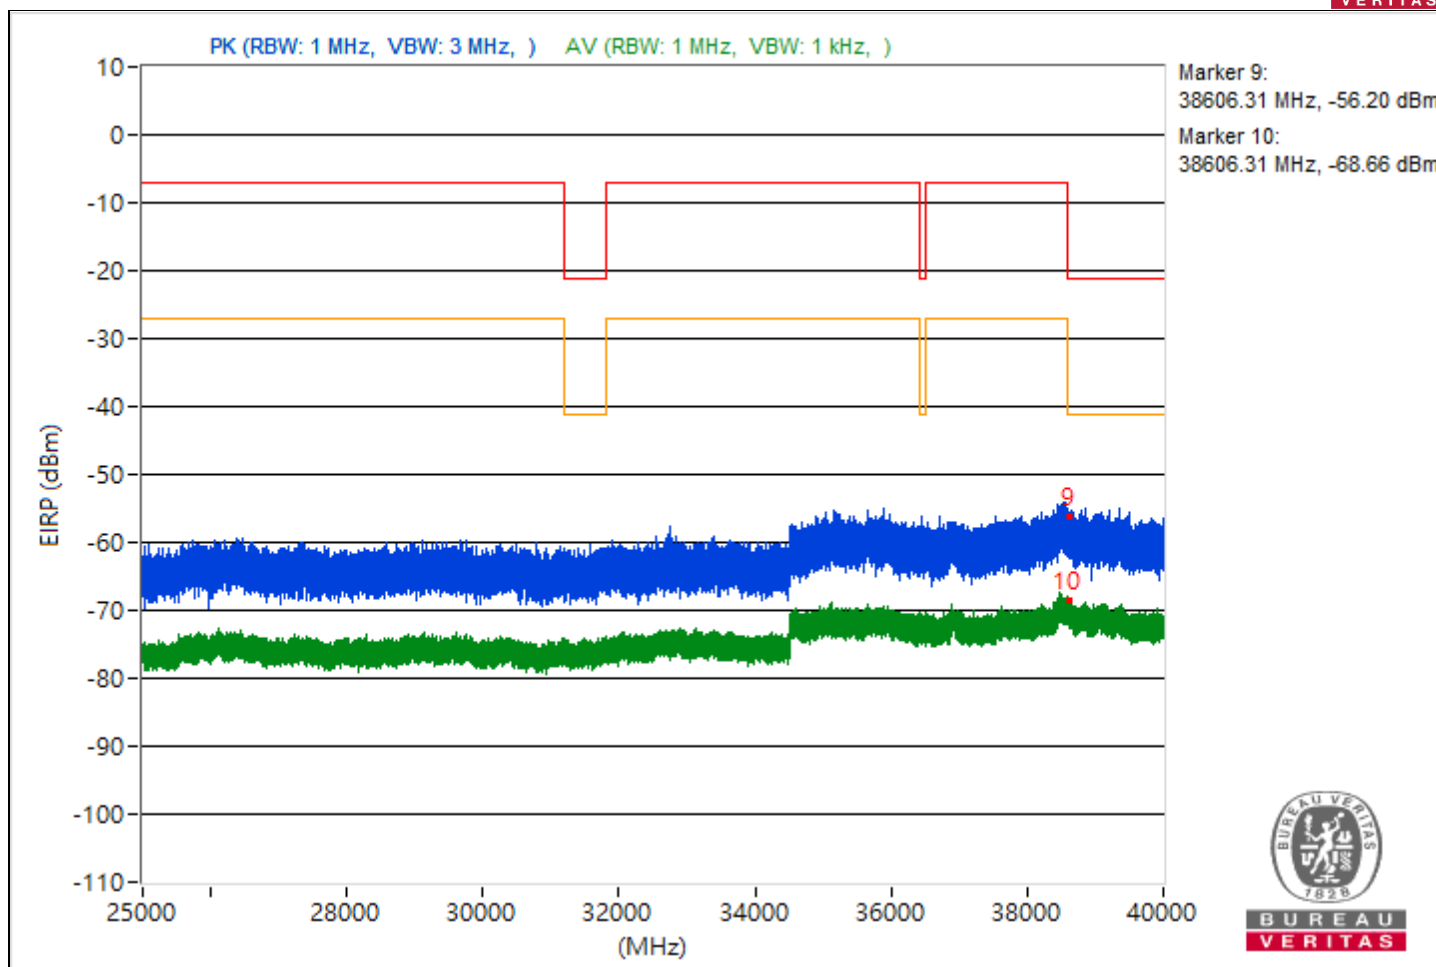


|                          |                             |             |                  |
|--------------------------|-----------------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT20) 26-tone RU | Channel     | CH 93 : 6415 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz              | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 63% RH                | Tested By   | JyunChun.Lin     |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4048.27         | 36.39 PK                | 74             | -37.61      | -69.54                  | -70.62                  | 8.17                   | -58.87           |
| 2                            | 4048.27         | 26.72 AV                | 54             | -27.28      | -79.09                  | -80.46                  | 8.17                   | -68.54           |
| 3                            | 14480.8         | 36.77 PK                | 74             | -37.23      | -70.39                  | -69.05                  | 8.17                   | -58.49           |
| 4                            | 14480.8         | 26.23 AV                | 54             | -27.77      | -79.4                   | -81.2                   | 8.17                   | -69.03           |
| 5                            | 19135.8         | 38.23 PK                | 74             | -35.77      | -68.56                  | -67.88                  | 8.17                   | -57.03           |
| 6                            | 19135.8         | 27.69 AV                | 54             | -26.31      | -77.11                  | -81.41                  | 8.17                   | -67.57           |
| 7                            | 23879           | 41.15 PK                | 74             | -32.85      | -63.65                  | -67.99                  | 8.17                   | -54.11           |
| 8                            | 23879           | 30.33 AV                | 54             | -23.67      | -77.18                  | -75.25                  | 8.17                   | -64.93           |
| 9                            | 39074.4         | 33.03 PK                | 74             | -40.97      | -74.98                  | -72.26                  | 8.17                   | -62.23           |
| 10                           | 39074.4         | 26.59 AV                | 54             | -27.41      | -81.51                  | -78.65                  | 8.17                   | -68.67           |

Note: Margin value = Emission Level - Limit value

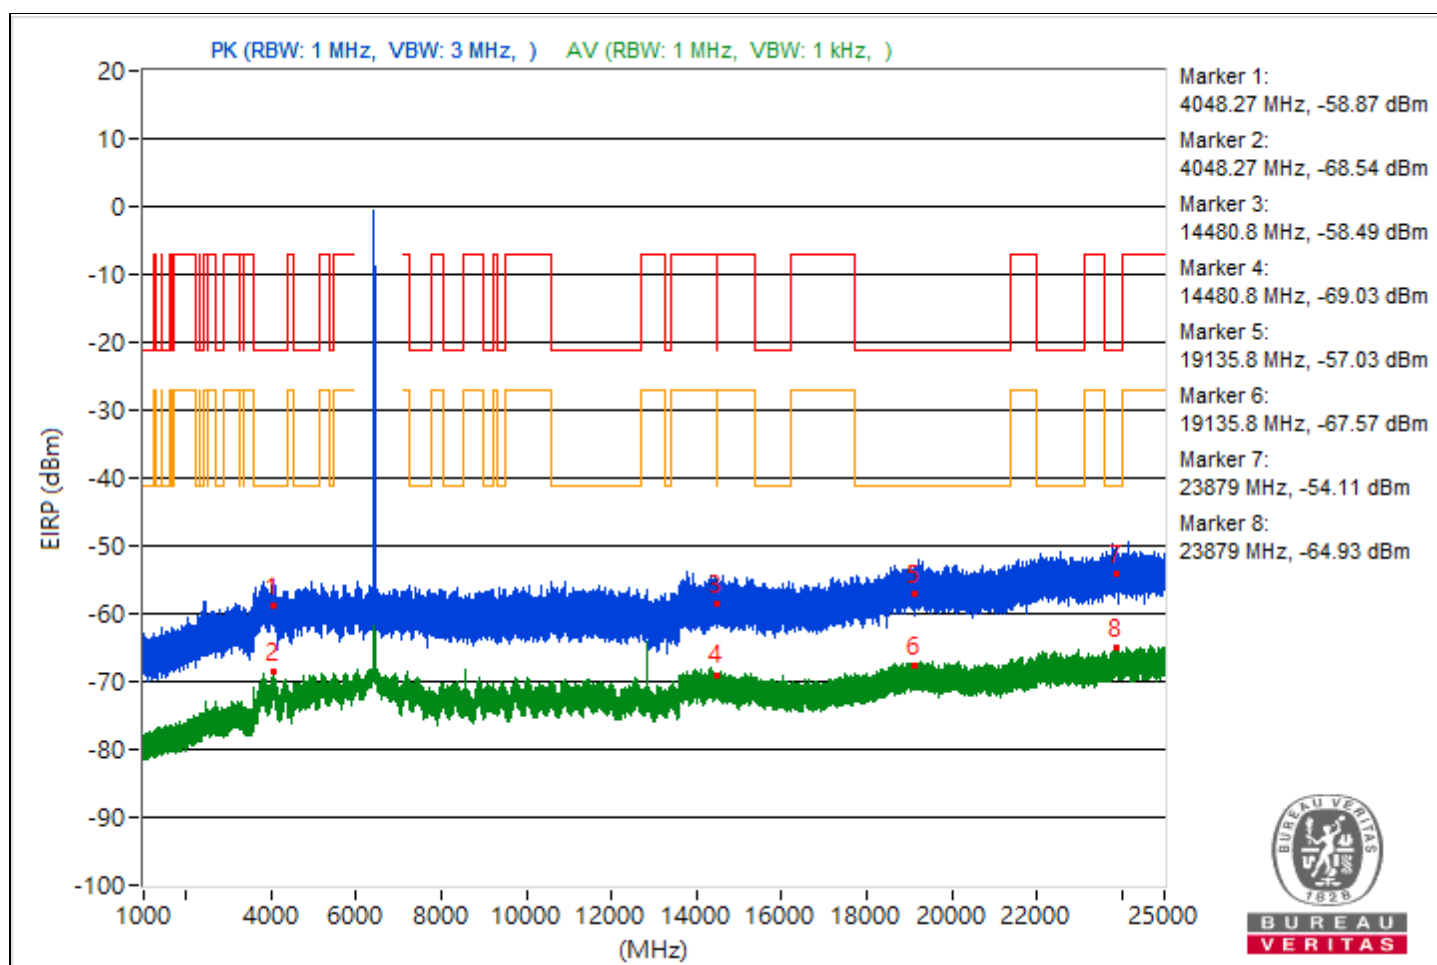


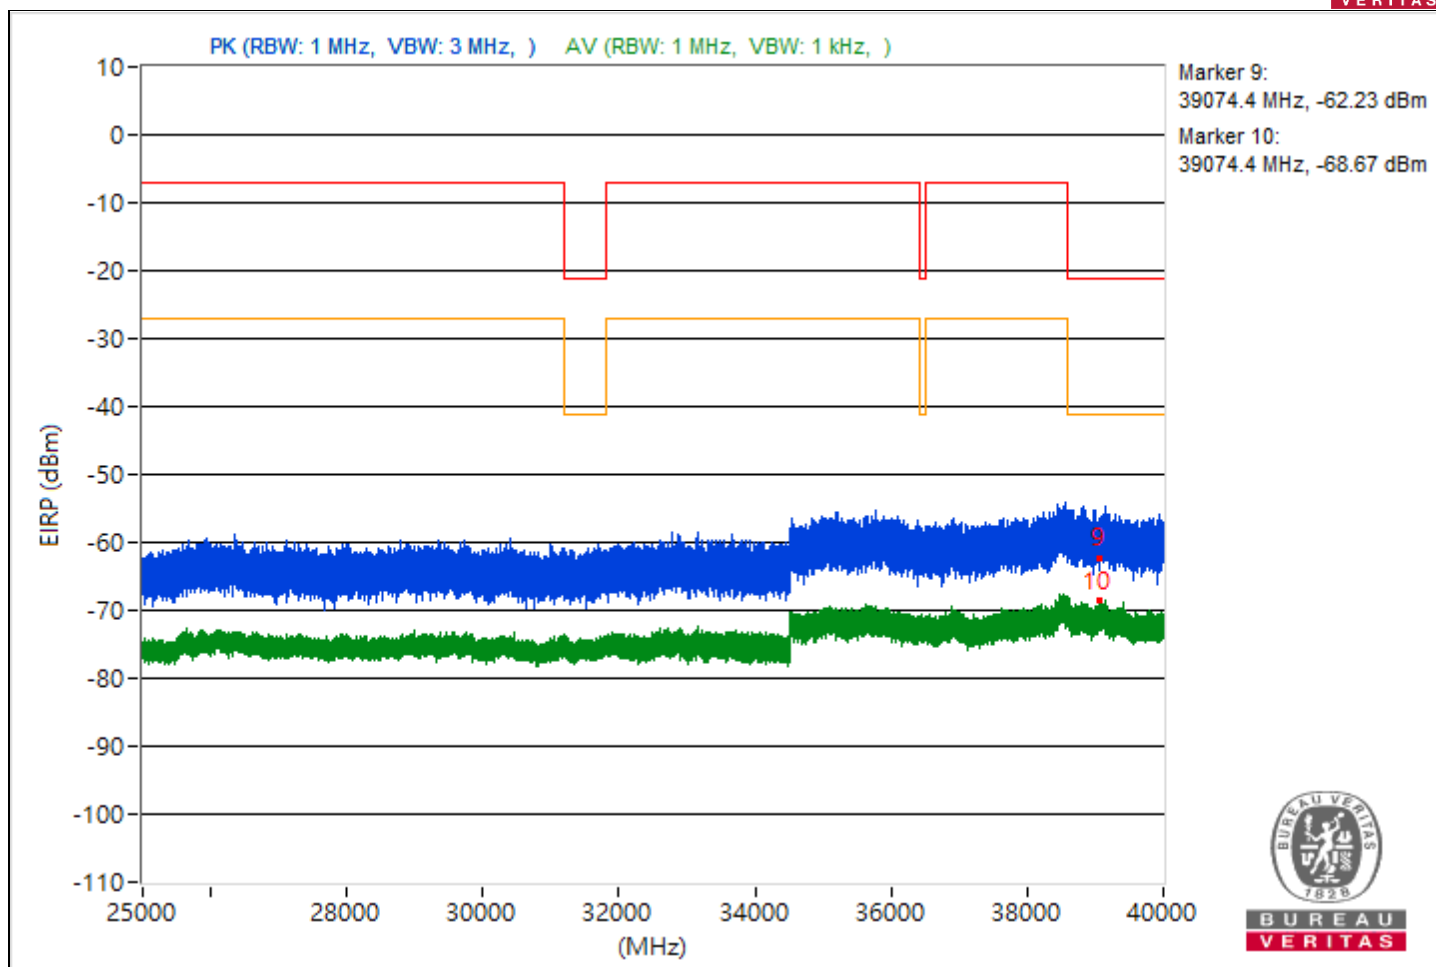


|                          |                             |             |                   |
|--------------------------|-----------------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT20) 26-tone RU | Channel     | CH 117 : 6535 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz              | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH                | Tested By   | JyunChun.Lin      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4047.72         | 35.43 PK                | 74             | -38.57      | -71.48                  | -70.58                  | 8.17                   | -59.83           |
| 2                            | 4047.72         | 25.67 AV                | 54             | -28.33      | -82.76                  | -79.41                  | 8.17                   | -69.59           |
| 3                            | 15391.2         | 38.61 PK                | 74             | -35.39      | -67.91                  | -67.75                  | 8.17                   | -56.65           |
| 4                            | 15391.2         | 26.36 AV                | 54             | -27.64      | -79.03                  | -81.47                  | 8.17                   | -68.9            |
| 5                            | 21388.4         | 37.79 PK                | 74             | -36.21      | -68.15                  | -69.23                  | 8.17                   | -57.47           |
| 6                            | 21388.4         | 28.03 AV                | 54             | -25.97      | -80.42                  | -77.04                  | 8.17                   | -67.23           |
| 7                            | 23820.4         | 39.58 PK                | 74             | -34.42      | -66.8                   | -66.93                  | 8.17                   | -55.68           |
| 8                            | 23820.4         | 29.92 AV                | 54             | -24.08      | -78.94                  | -74.97                  | 8.17                   | -65.34           |
| 9                            | 38817.42        | 35.19 PK                | 74             | -38.81      | -73.6                   | -69.73                  | 8.17                   | -60.07           |
| 10                           | 38817.42        | 26.67 AV                | 54             | -27.33      | -80.61                  | -79.06                  | 8.17                   | -68.59           |

Note: Margin value = Emission Level - Limit value

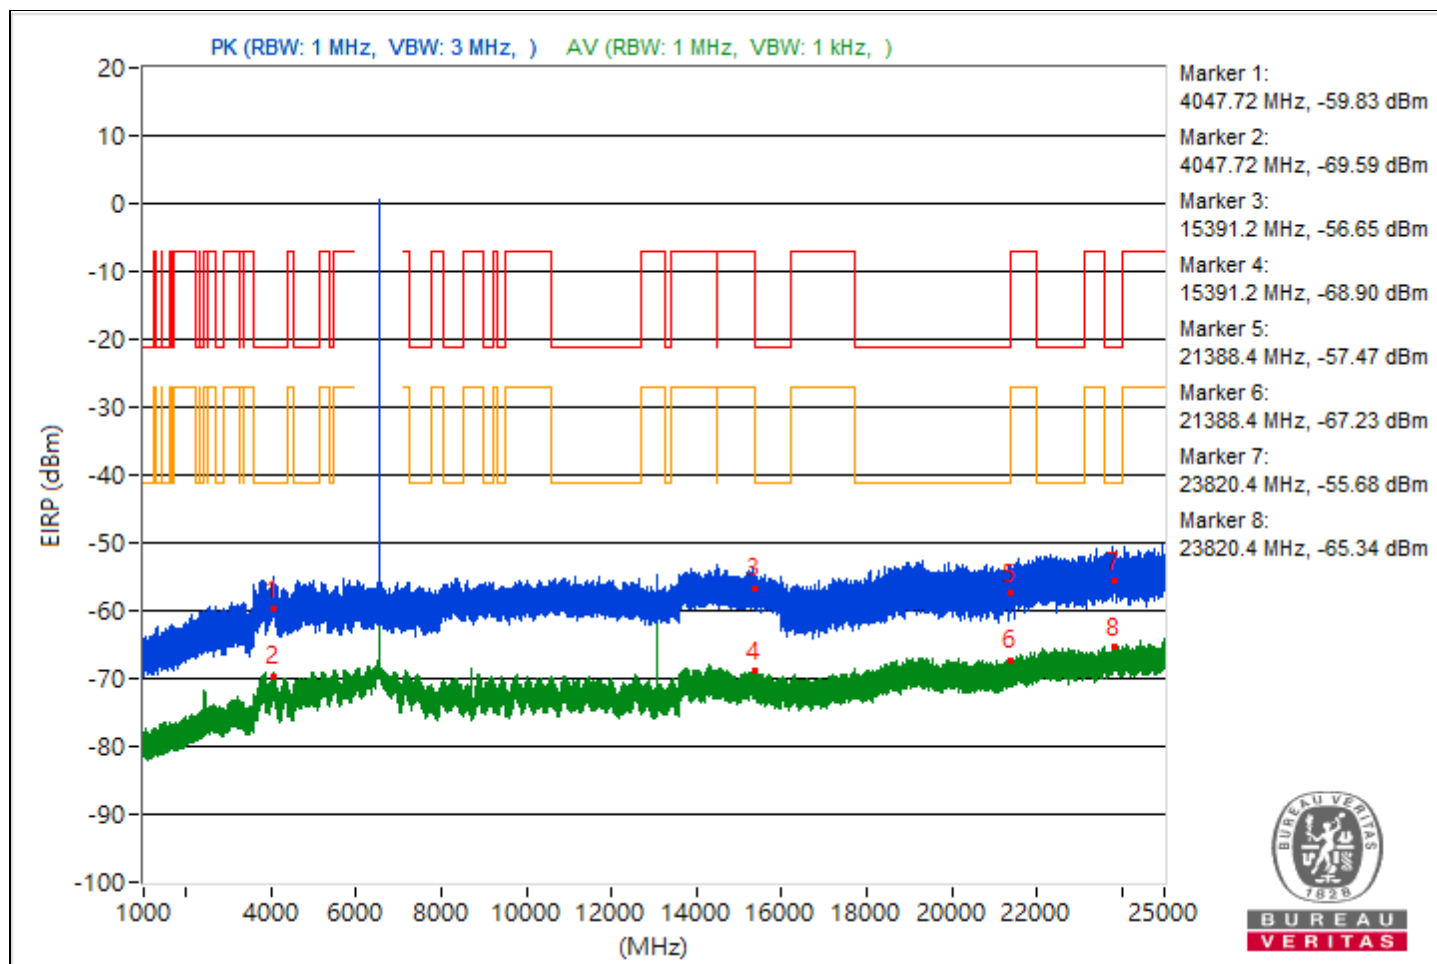

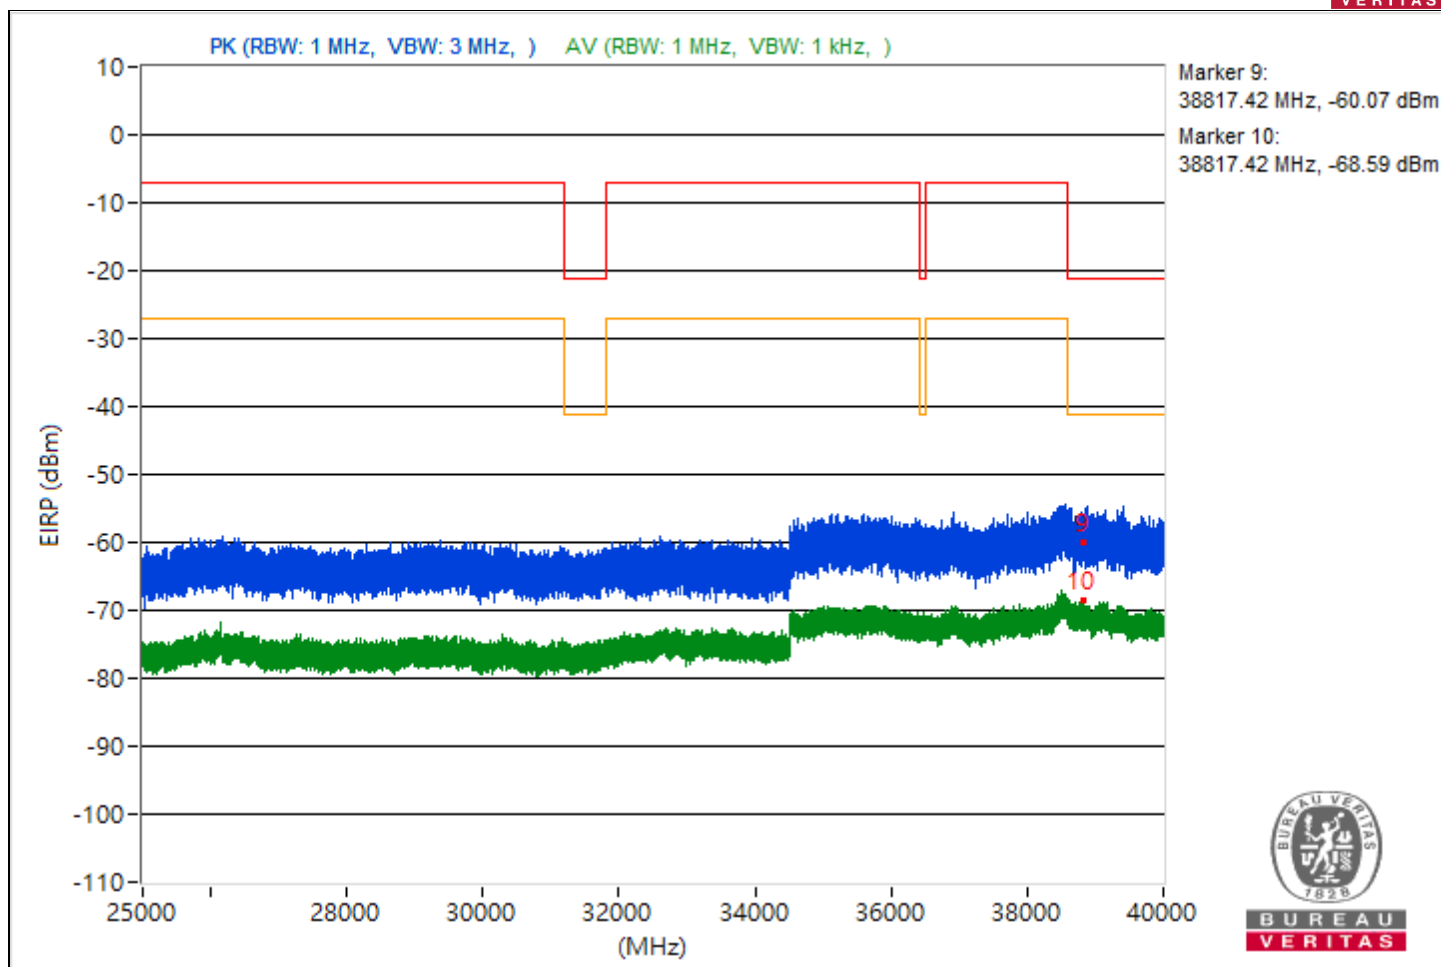





|                          |                             |             |                   |
|--------------------------|-----------------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT20) 26-tone RU | Channel     | CH 149 : 6695 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz              | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH                | Tested By   | JyunChun.Lin      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4054.33         | 36.91 PK                | 74             | -37.09      | -70.62                  | -68.66                  | 8.17                   | -58.35           |
| 2                            | 4054.33         | 25.54 AV                | 54             | -28.46      | -83.48                  | -79.29                  | 8.17                   | -69.72           |
| 3                            | 13389.78        | 40.82 PK                | 74             | -33.18      | -68.25                  | -63.99                  | 8.17                   | -54.44           |
| 4                            | 13389.78        | 37.12 AV                | 54             | -16.88      | -75.95                  | -66.81                  | 8.17                   | -58.14           |
| 5                            | 18683.8         | 38.07 PK                | 74             | -35.93      | -68.81                  | -67.98                  | 8.17                   | -57.19           |
| 6                            | 18683.8         | 28.3 AV                 | 54             | -25.7       | -76.87                  | -79.94                  | 8.17                   | -66.96           |
| 7                            | 23876.2         | 40.54 PK                | 74             | -33.46      | -65.76                  | -66.05                  | 8.17                   | -54.72           |
| 8                            | 23876.2         | 30.16 AV                | 54             | -23.84      | -75.08                  | -77.96                  | 8.17                   | -65.1            |
| 9                            | 39121.96        | 37.91 PK                | 74             | -36.09      | -68.86                  | -68.22                  | 8.17                   | -57.35           |
| 10                           | 39121.96        | 26.18 AV                | 54             | -27.82      | -82.99                  | -78.6                   | 8.17                   | -69.08           |

Note: Margin value = Emission Level - Limit value

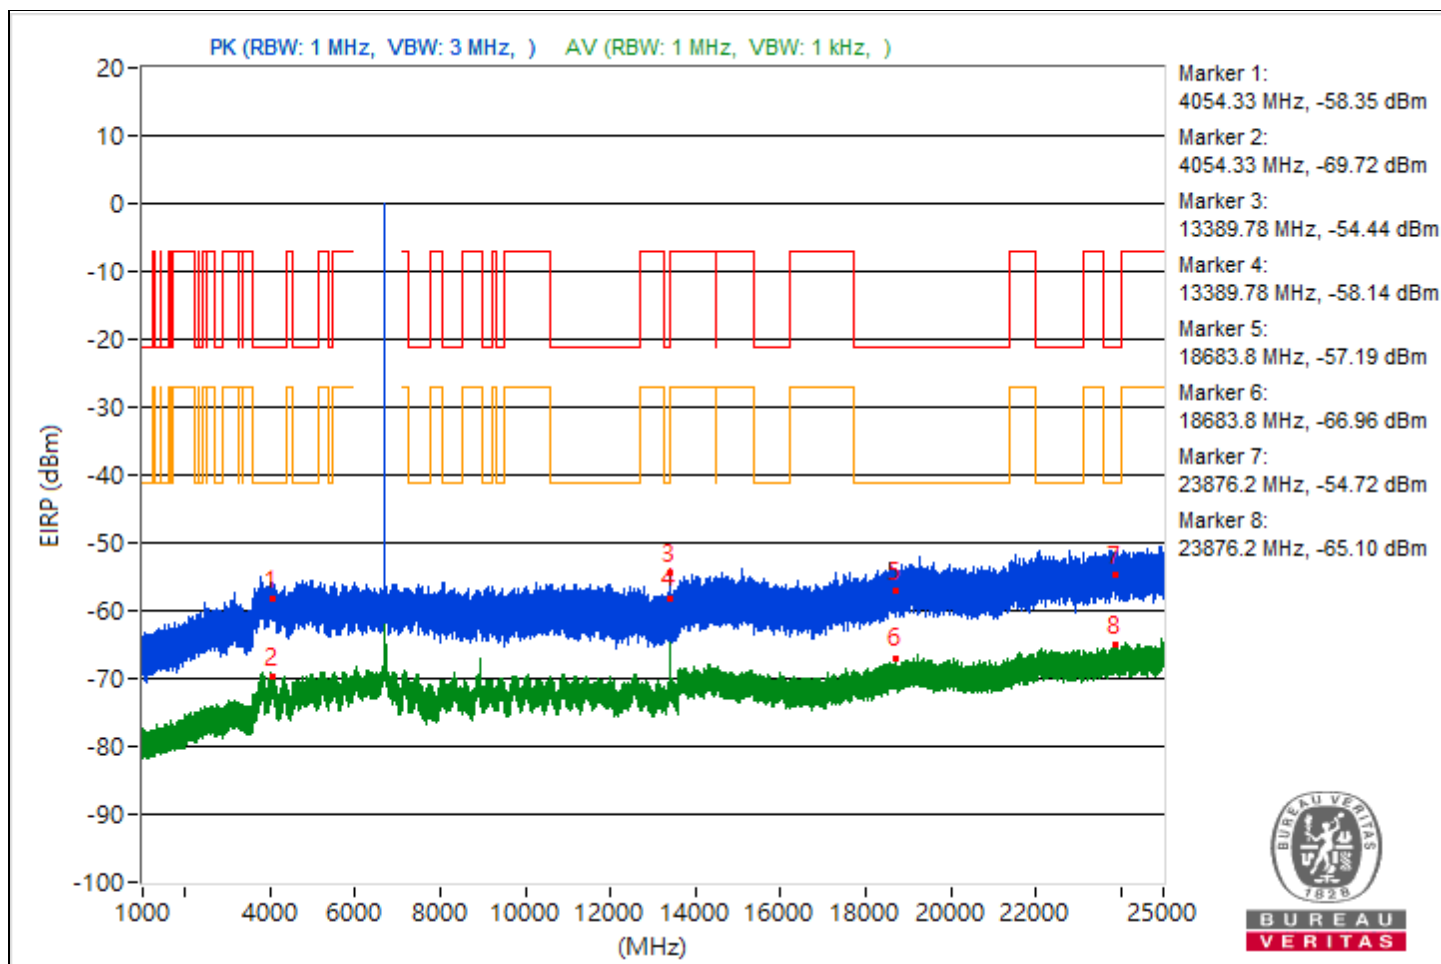


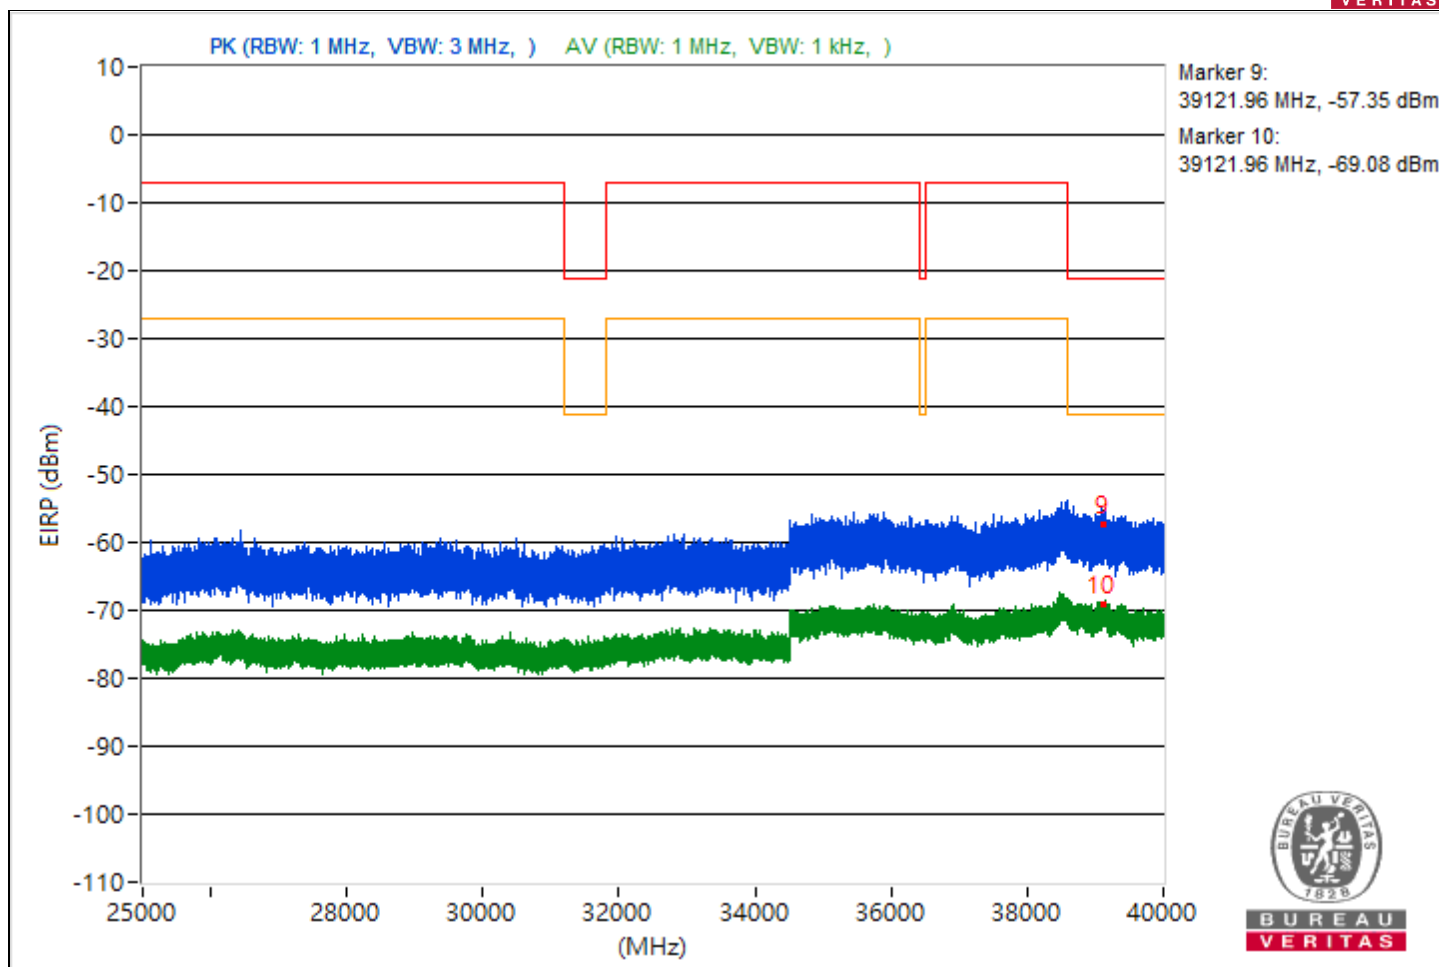


|                          |                             |             |                   |
|--------------------------|-----------------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT20) 26-tone RU | Channel     | CH 181 : 6855 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz              | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH                | Tested By   | JyunChun.Lin      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4097.27         | 35.3 PK                 | 74             | -38.7       | -71.91                  | -70.49                  | 8.17                   | -59.96           |
| 2                            | 4097.27         | 26.76 AV                | 54             | -27.24      | -81.38                  | -78.47                  | 8.17                   | -68.5            |
| 3                            | 8225.69         | 37.83 PK                | 74             | -36.17      | -68.5                   | -68.72                  | 8.17                   | -57.43           |
| 4                            | 8225.69         | 30.49 AV                | 54             | -23.51      | -76.89                  | -75.19                  | 8.17                   | -64.77           |
| 5                            | 19208.3         | 37.43 PK                | 74             | -36.57      | -69.41                  | -68.64                  | 8.17                   | -57.83           |
| 6                            | 19208.3         | 27.83 AV                | 54             | -26.17      | -77.06                  | -81.07                  | 8.17                   | -67.43           |
| 7                            | 23728.8         | 40.41 PK                | 74             | -33.59      | -67.47                  | -64.95                  | 8.17                   | -54.85           |
| 8                            | 23728.8         | 30.14 AV                | 54             | -23.86      | -76.95                  | -75.74                  | 8.17                   | -65.12           |
| 9                            | 38625.33        | 34.18 PK                | 74             | -39.82      | -74.47                  | -70.81                  | 8.17                   | -61.08           |
| 10                           | 38625.33        | 26.38 AV                | 54             | -27.62      | -79.09                  | -81.31                  | 8.17                   | -68.88           |

Note: Margin value = Emission Level - Limit value

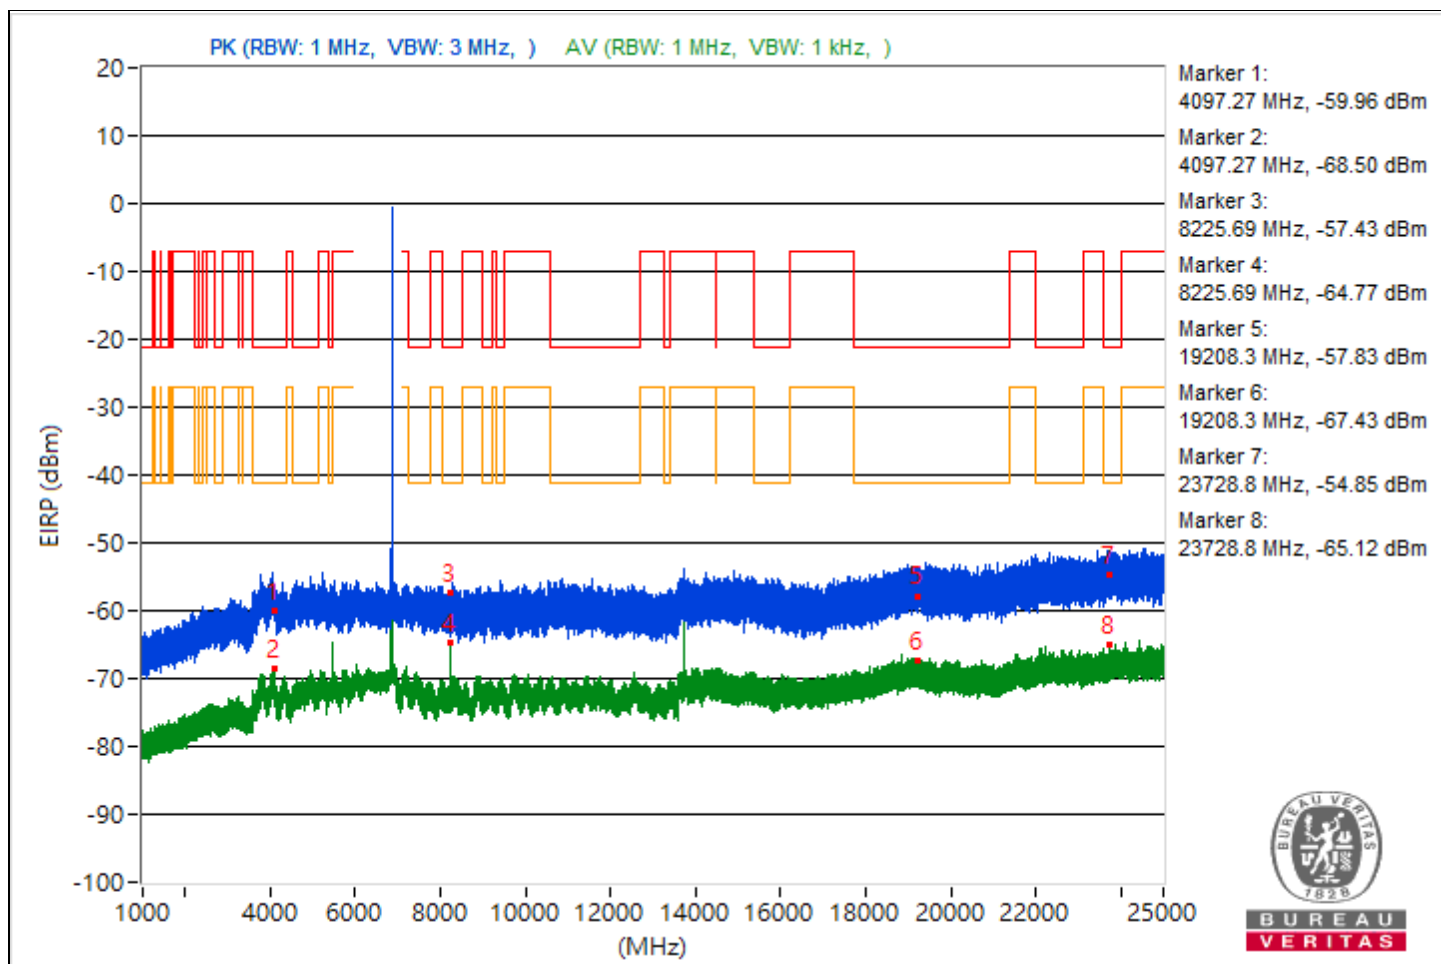


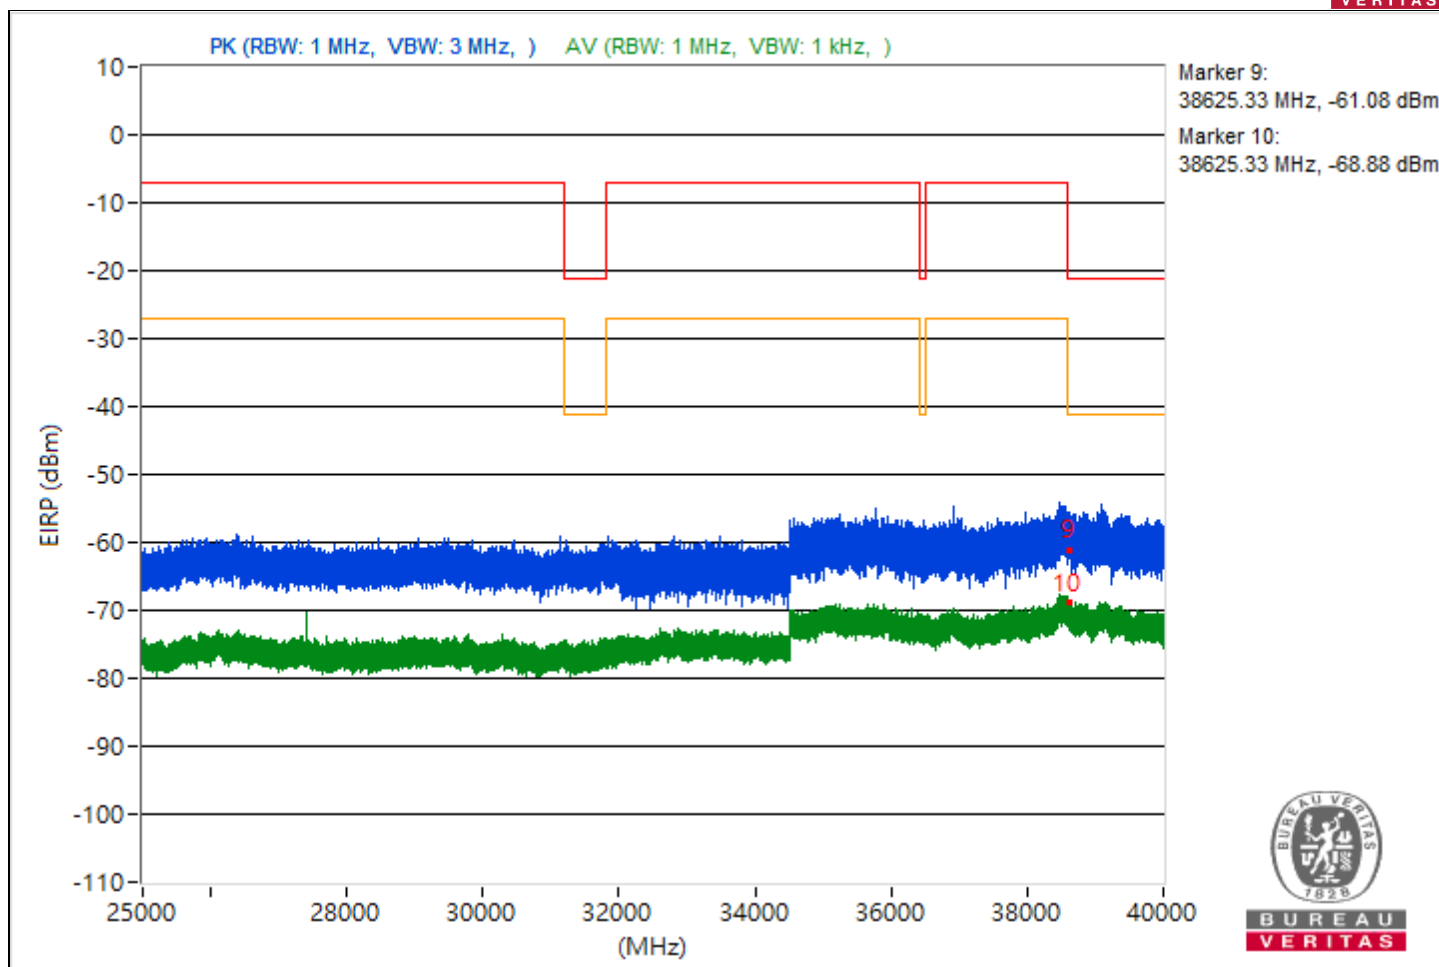


|                          |                             |             |                 |
|--------------------------|-----------------------------|-------------|-----------------|
| RF Mode                  | 802.11be (EHT20) 52-tone RU | Channel     | CH 2 : 5935 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz              | Input Power | 3.3 Vdc         |
| Environmental Conditions | 24°C, 63% RH                | Tested By   | JyunChun.Lin    |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4981.83         | 35.47 PK                | 74             | -38.53      | -70.66                  | -71.3                   | 8.17                   | -59.79           |
| 2                            | 4981.83         | 27.13 AV                | 54             | -26.87      | -80.27                  | -78.53                  | 8.17                   | -68.13           |
| 3                            | 15725.96        | 35.67 PK                | 74             | -38.33      | -70.56                  | -70.99                  | 8.17                   | -59.59           |
| 4                            | 15725.96        | 26.13 AV                | 54             | -27.87      | -81.77                  | -79.22                  | 8.17                   | -69.13           |
| 5                            | 20084.9         | 38.86 PK                | 74             | -35.14      | -69.06                  | -66.49                  | 8.17                   | -56.4            |
| 6                            | 20084.9         | 28.1 AV                 | 54             | -25.9       | -76.95                  | -80.42                  | 8.17                   | -67.16           |
| 7                            | 23879.9         | 43.4 PK                 | 74             | -30.6       | -62.35                  | -63.85                  | 8.17                   | -51.86           |
| 8                            | 23879.9         | 30.94 AV                | 54             | -23.06      | -76.7                   | -74.56                  | 8.17                   | -64.32           |
| 9                            | 38602.31        | 38.16 PK                | 74             | -35.84      | -66.49                  | -71.37                  | 8.17                   | -57.1            |
| 10                           | 38602.31        | 26.43 AV                | 54             | -27.57      | -78.62                  | -82.07                  | 8.17                   | -68.83           |

Note: Margin value = Emission Level - Limit value

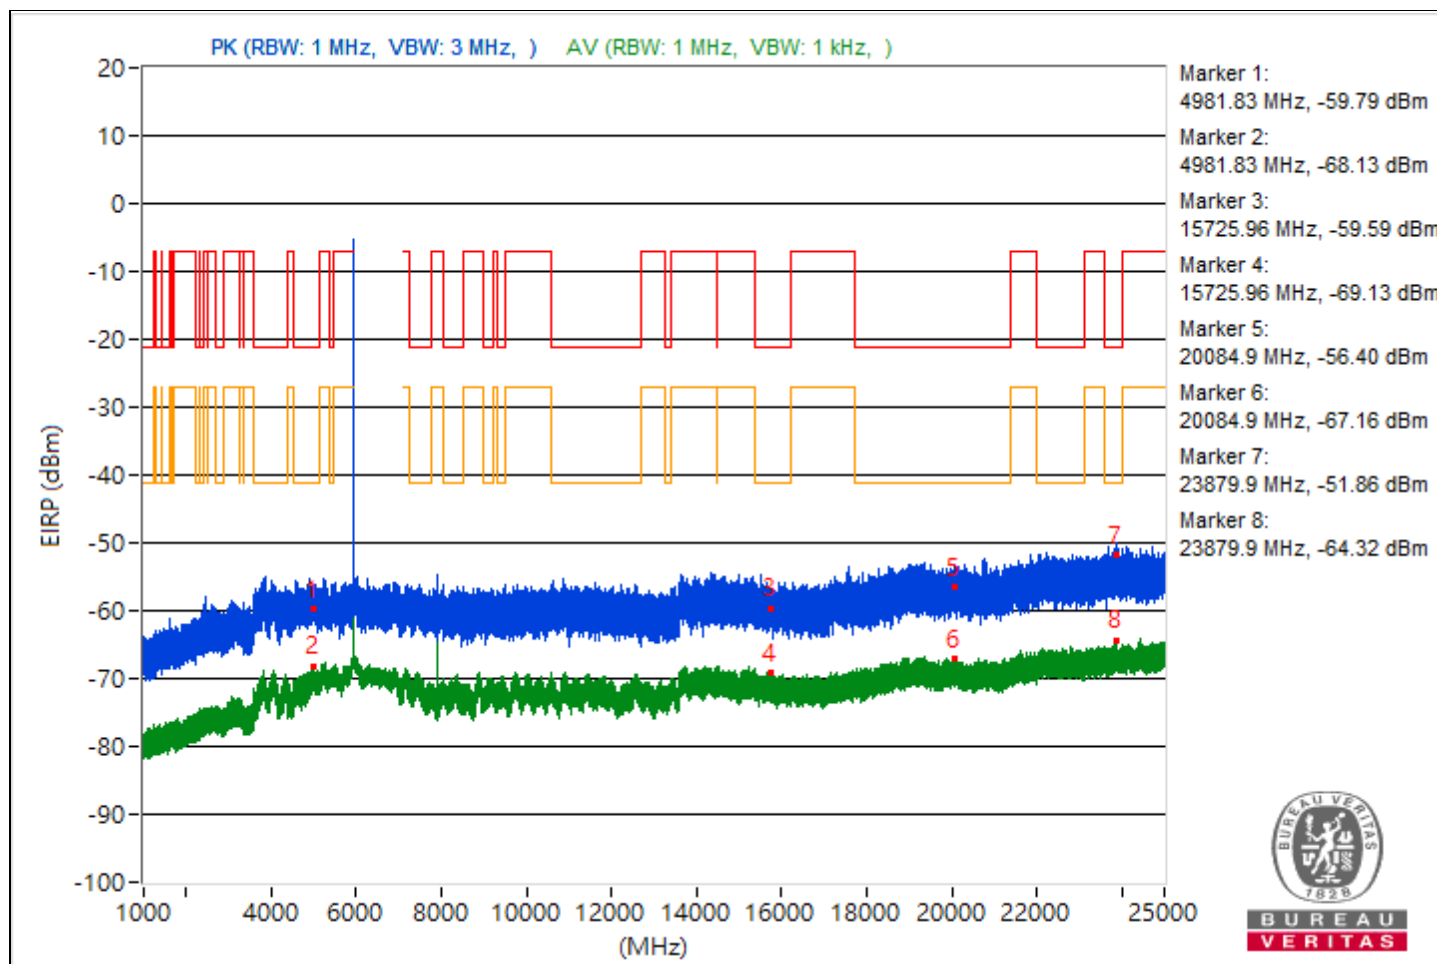


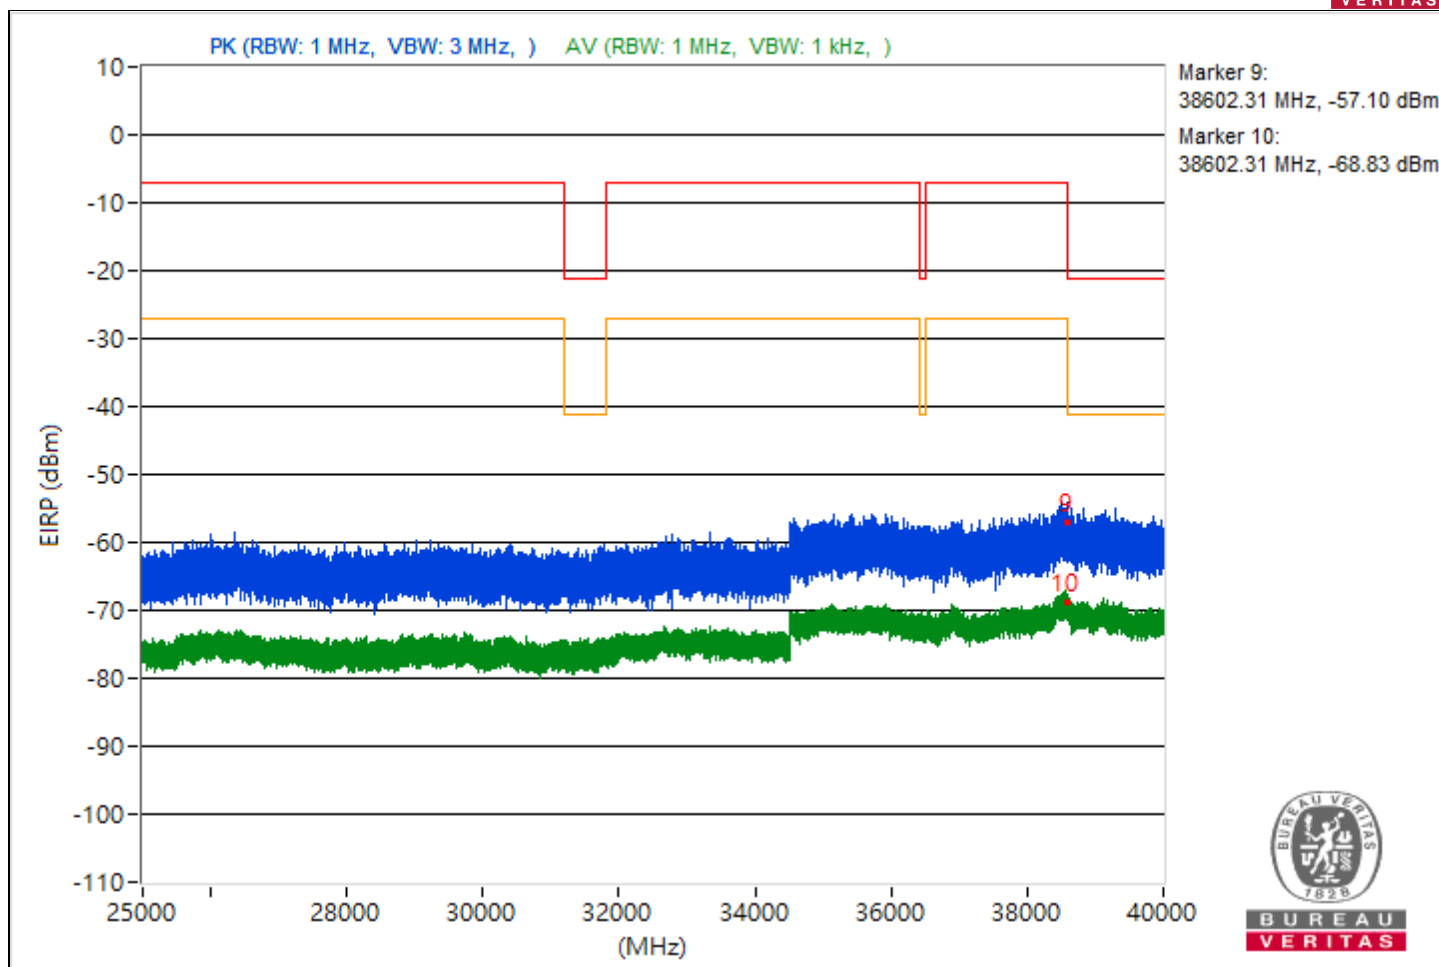


|                          |                             |             |                 |
|--------------------------|-----------------------------|-------------|-----------------|
| RF Mode                  | 802.11be (EHT20) 52-tone RU | Channel     | CH 1 : 5955 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz              | Input Power | 3.3 Vdc         |
| Environmental Conditions | 24°C, 63% RH                | Tested By   | JyunChun.Lin    |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4037.92         | 36.86 PK                | 74             | -37.14      | -69.13                  | -70.08                  | 8.17                   | -58.4            |
| 2                            | 4037.92         | 26.87 AV                | 54             | -27.13      | -80.71                  | -78.67                  | 8.17                   | -68.39           |
| 3                            | 7449.02         | 35.79 PK                | 74             | -38.21      | -69.87                  | -71.6                   | 8.17                   | -59.47           |
| 4                            | 7449.02         | 26.29 AV                | 54             | -27.71      | -79.24                  | -81.32                  | 8.17                   | -68.97           |
| 5                            | 20142.5         | 35.73 PK                | 74             | -38.27      | -70.33                  | -71.13                  | 8.17                   | -59.53           |
| 6                            | 20142.5         | 27.61 AV                | 54             | -26.39      | -81.3                   | -77.27                  | 8.17                   | -67.65           |
| 7                            | 22776.3         | 40.14 PK                | 74             | -33.86      | -68.23                  | -64.97                  | 8.17                   | -55.12           |
| 8                            | 22776.3         | 30.02 AV                | 54             | -23.98      | -75.06                  | -78.41                  | 8.17                   | -65.24           |
| 9                            | 39110.13        | 35.88 PK                | 74             | -38.12      | -70.14                  | -71.04                  | 8.17                   | -59.38           |
| 10                           | 39110.13        | 26.74 AV                | 54             | -27.26      | -80.67                  | -78.91                  | 8.17                   | -68.52           |

Note: Margin value = Emission Level - Limit value

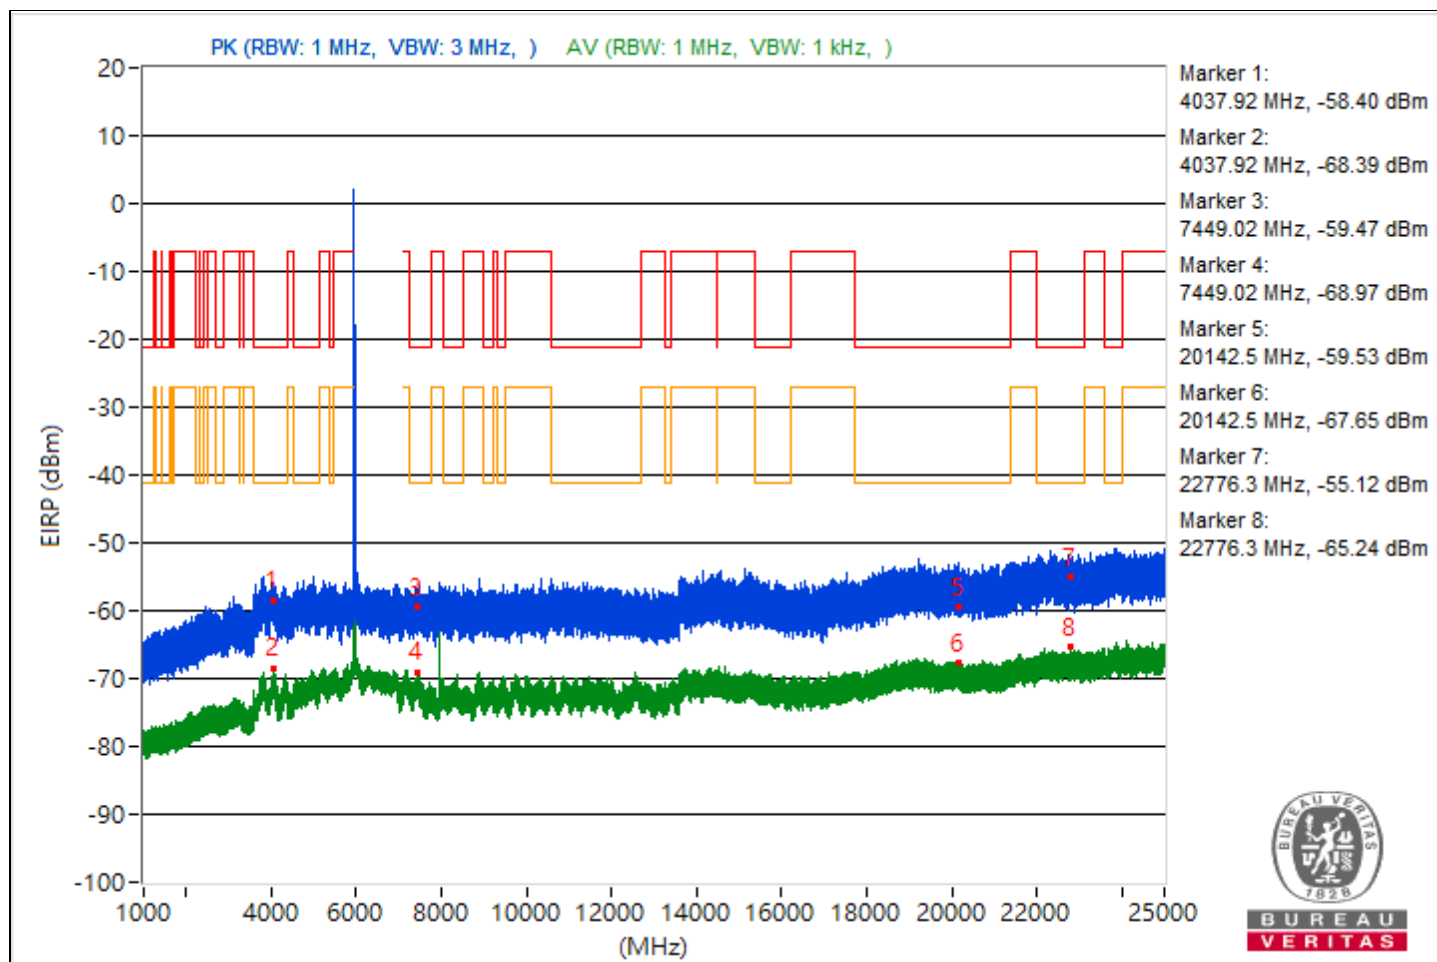

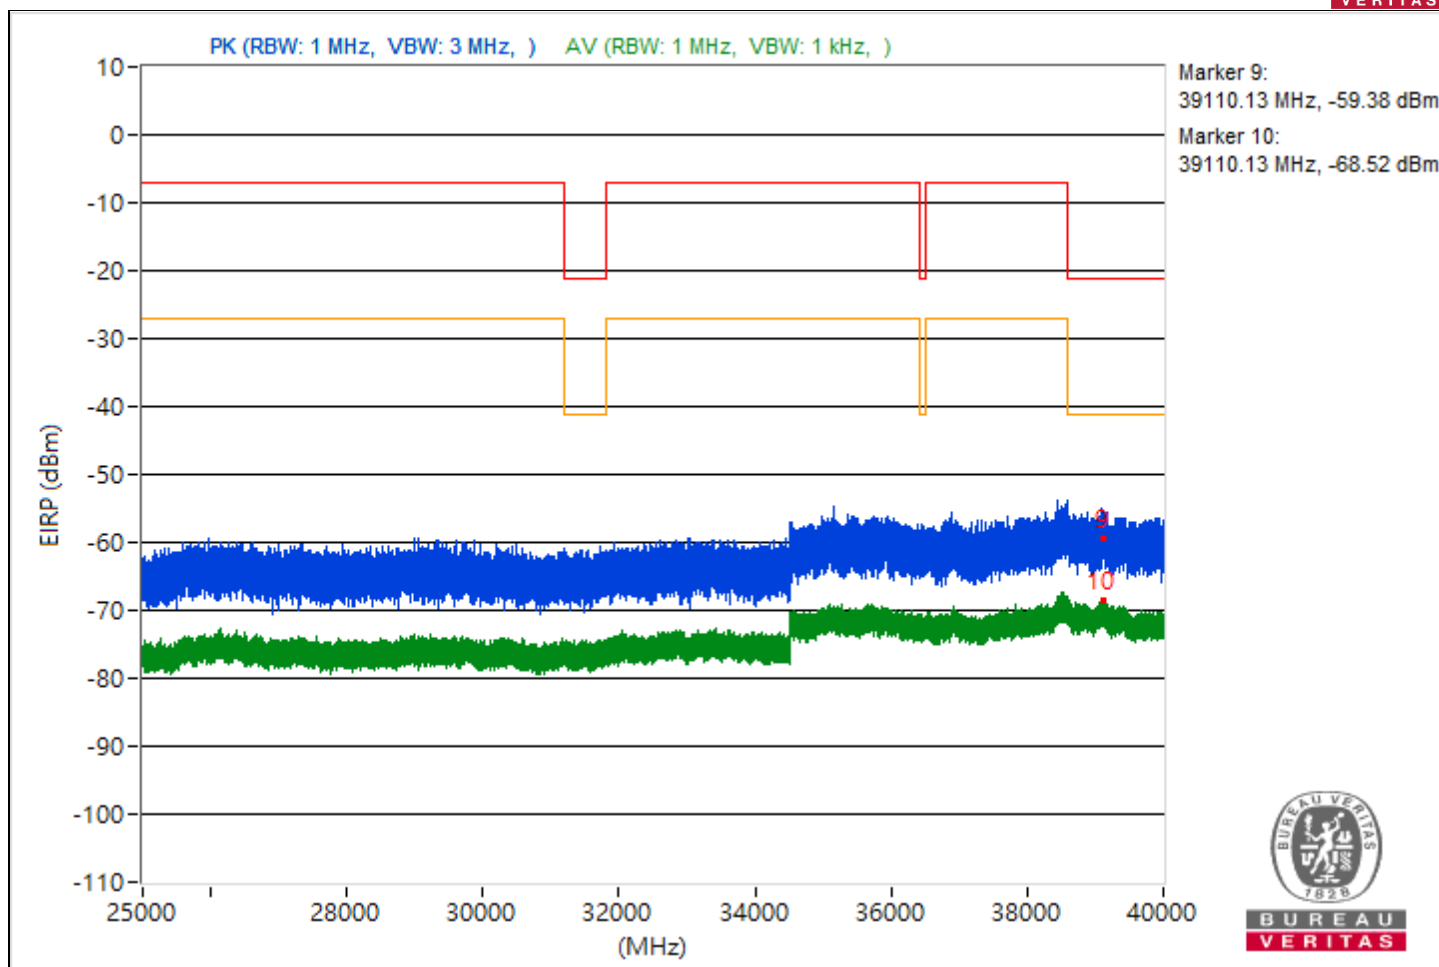





|                          |                             |             |                  |
|--------------------------|-----------------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT20) 52-tone RU | Channel     | CH 45 : 6175 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz              | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 67% RH                | Tested By   | Katina Lu        |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3782.27         | 38.5 PK                 | 74             | -35.5       | -68.19                  | -67.7                   | 8.17                   | -56.76           |
| 2                            | 3782.27         | 28.03 AV                | 54             | -25.97      | -79.73                  | -77.4                   | 8.17                   | -67.23           |
| 3                            | 8233.33         | 38.43 PK                | 74             | -35.57      | -66.5                   | -70.36                  | 8.17                   | -56.83           |
| 4                            | 8233.33         | 33.51 AV                | 54             | -20.49      | -72.98                  | -72.87                  | 8.17                   | -61.75           |
| 5                            | 19215.1         | 40.67 PK                | 74             | -33.33      | -67.78                  | -64.4                   | 8.17                   | -54.59           |
| 6                            | 19215.1         | 30.05 AV                | 54             | -23.95      | -75.09                  | -78.25                  | 8.17                   | -65.21           |
| 7                            | 23907.5         | 42.96 PK                | 74             | -31.04      | -62.58                  | -64.62                  | 8.17                   | -52.3            |
| 8                            | 23907.5         | 32.25 AV                | 54             | -21.75      | -73.82                  | -74.59                  | 8.17                   | -63.01           |
| 9                            | 38825.51        | 36.29 PK                | 74             | -37.71      | -72.55                  | -68.61                  | 8.17                   | -58.97           |
| 10                           | 38825.51        | 28.52 AV                | 54             | -25.48      | -77.69                  | -78.17                  | 8.17                   | -66.74           |

Note: Margin value = Emission Level - Limit value

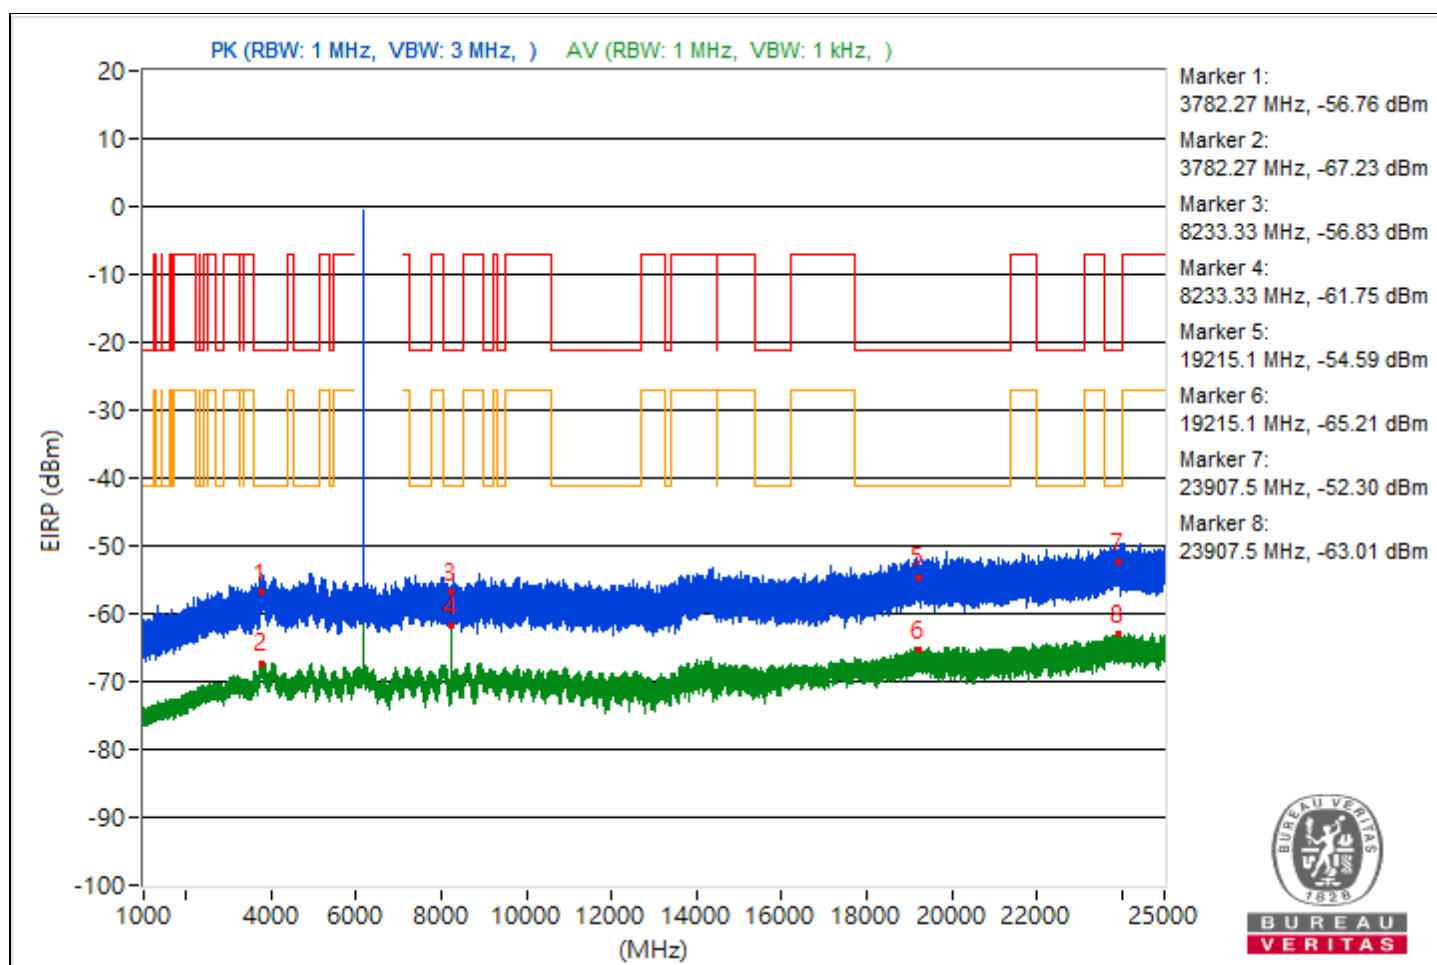


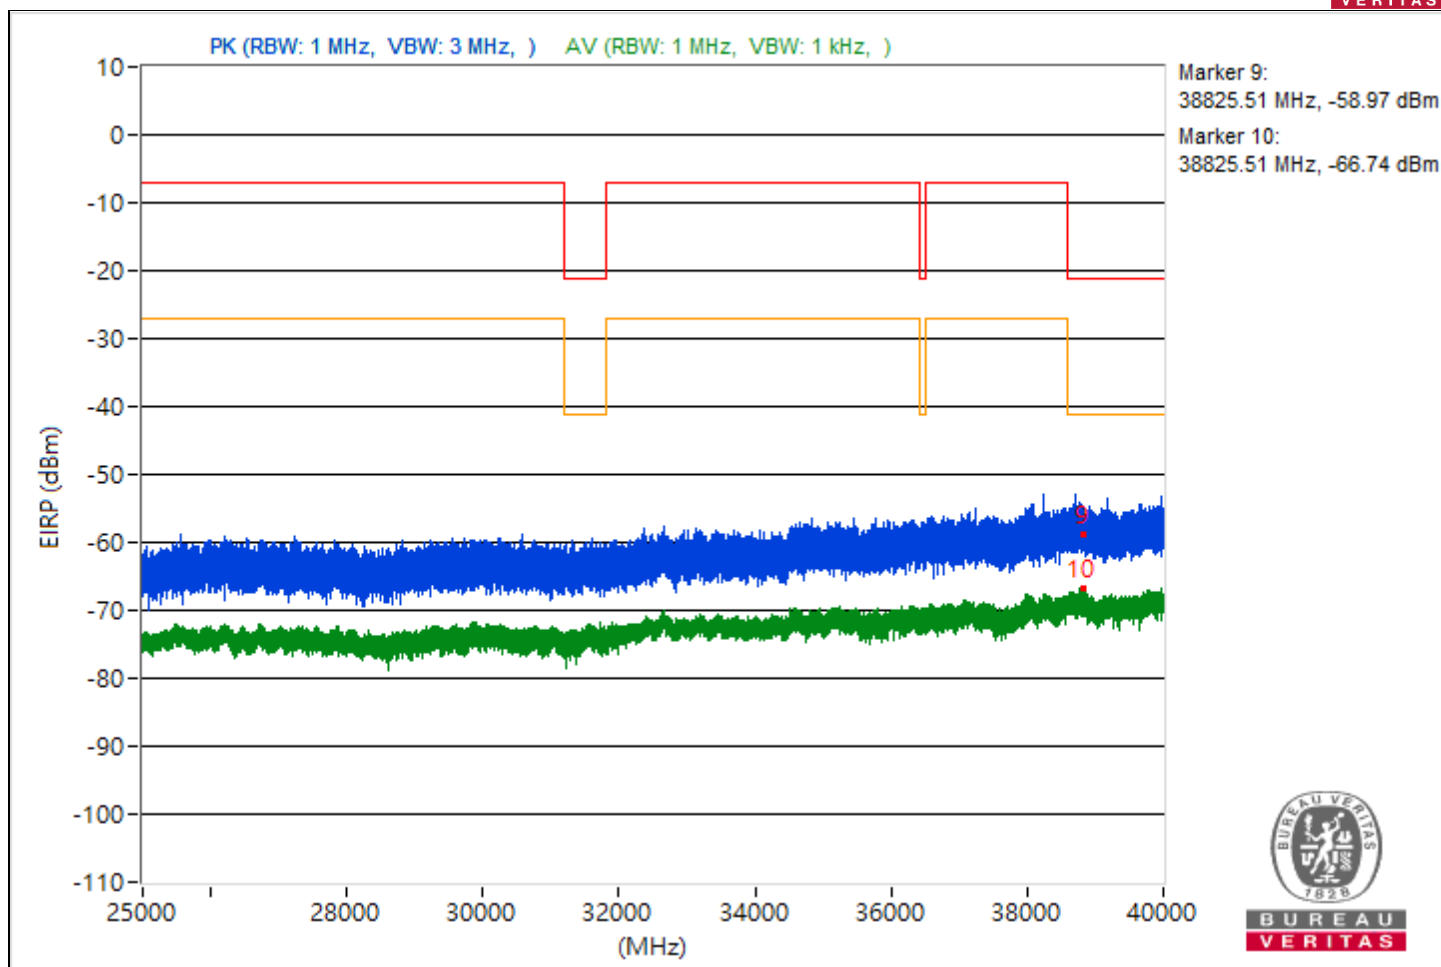


|                          |                             |             |                  |
|--------------------------|-----------------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT20) 52-tone RU | Channel     | CH 93 : 6415 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz              | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 63% RH                | Tested By   | JyunChun.Lin     |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5442.51         | 34.24 PK                | 74             | -39.76      | -75.13                  | -70.46                  | 8.17                   | -61.02           |
| 2                            | 5442.51         | 26.21 AV                | 54             | -27.79      | -79.31                  | -81.4                   | 8.17                   | -69.05           |
| 3                            | 14499.47        | 37.16 PK                | 74             | -36.84      | -69.98                  | -68.68                  | 8.17                   | -58.1            |
| 4                            | 14499.47        | 26.69 AV                | 54             | -27.31      | -80.7                   | -78.98                  | 8.17                   | -68.57           |
| 5                            | 21371.8         | 38.49 PK                | 74             | -35.51      | -68.21                  | -67.7                   | 8.17                   | -56.77           |
| 6                            | 21371.8         | 27.87 AV                | 54             | -26.13      | -80.42                  | -77.27                  | 8.17                   | -67.39           |
| 7                            | 23883           | 42.3 PK                 | 74             | -31.7       | -65.16                  | -63.32                  | 8.17                   | -52.96           |
| 8                            | 23883           | 29.75 AV                | 54             | -24.25      | -78.54                  | -75.39                  | 8.17                   | -65.51           |
| 9                            | 39048.36        | 34.46 PK                | 74             | -39.54      | -73.27                  | -70.98                  | 8.17                   | -60.8            |
| 10                           | 39048.36        | 26.63 AV                | 54             | -27.37      | -78.91                  | -80.93                  | 8.17                   | -68.63           |

Note: Margin value = Emission Level - Limit value

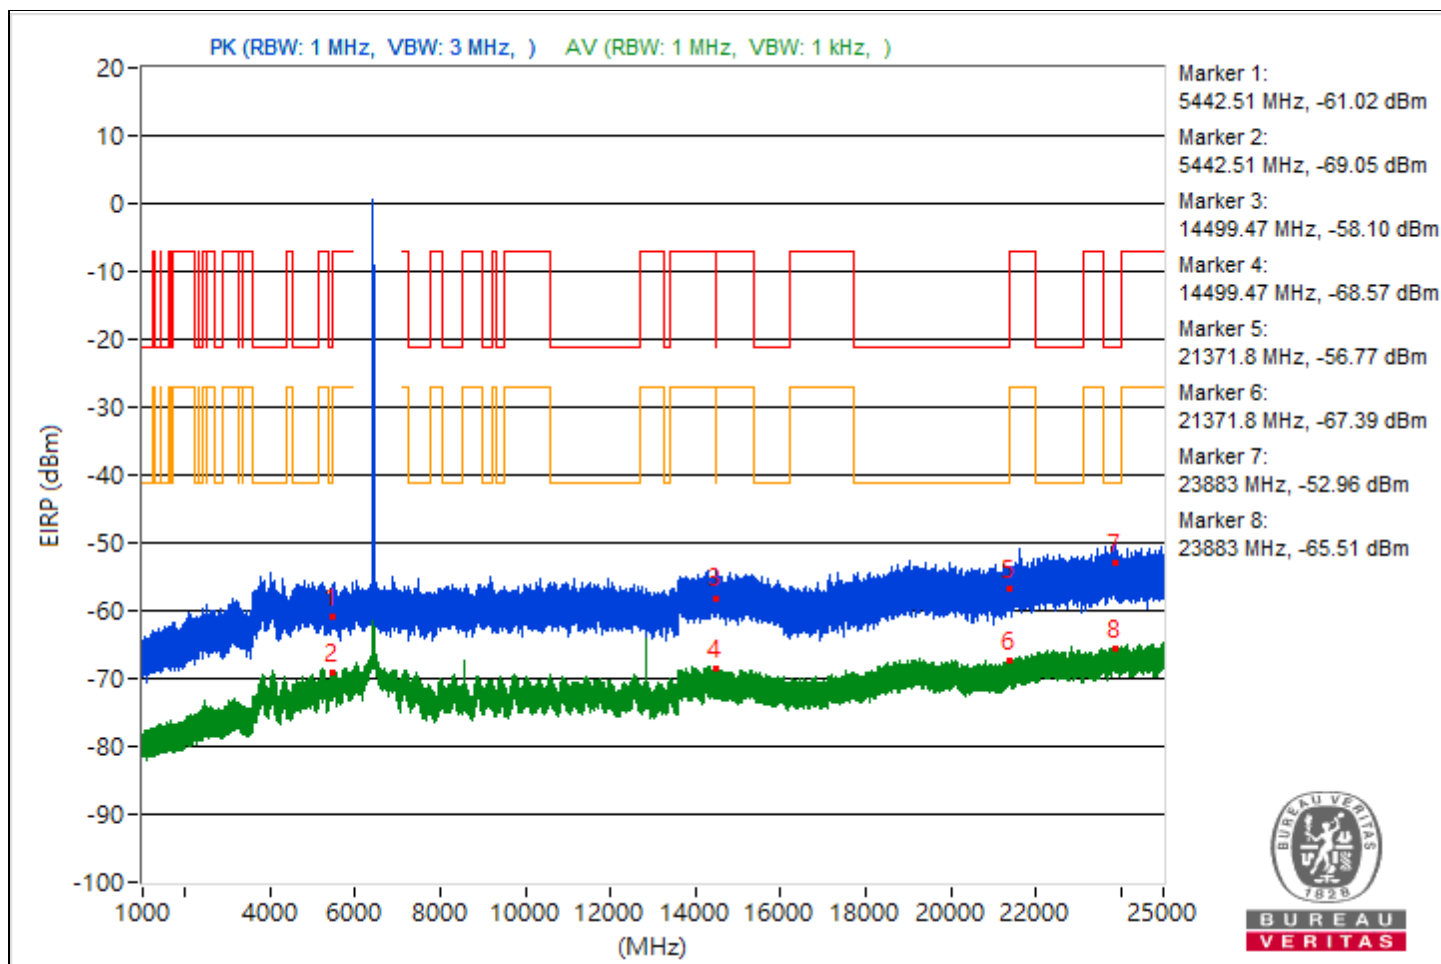


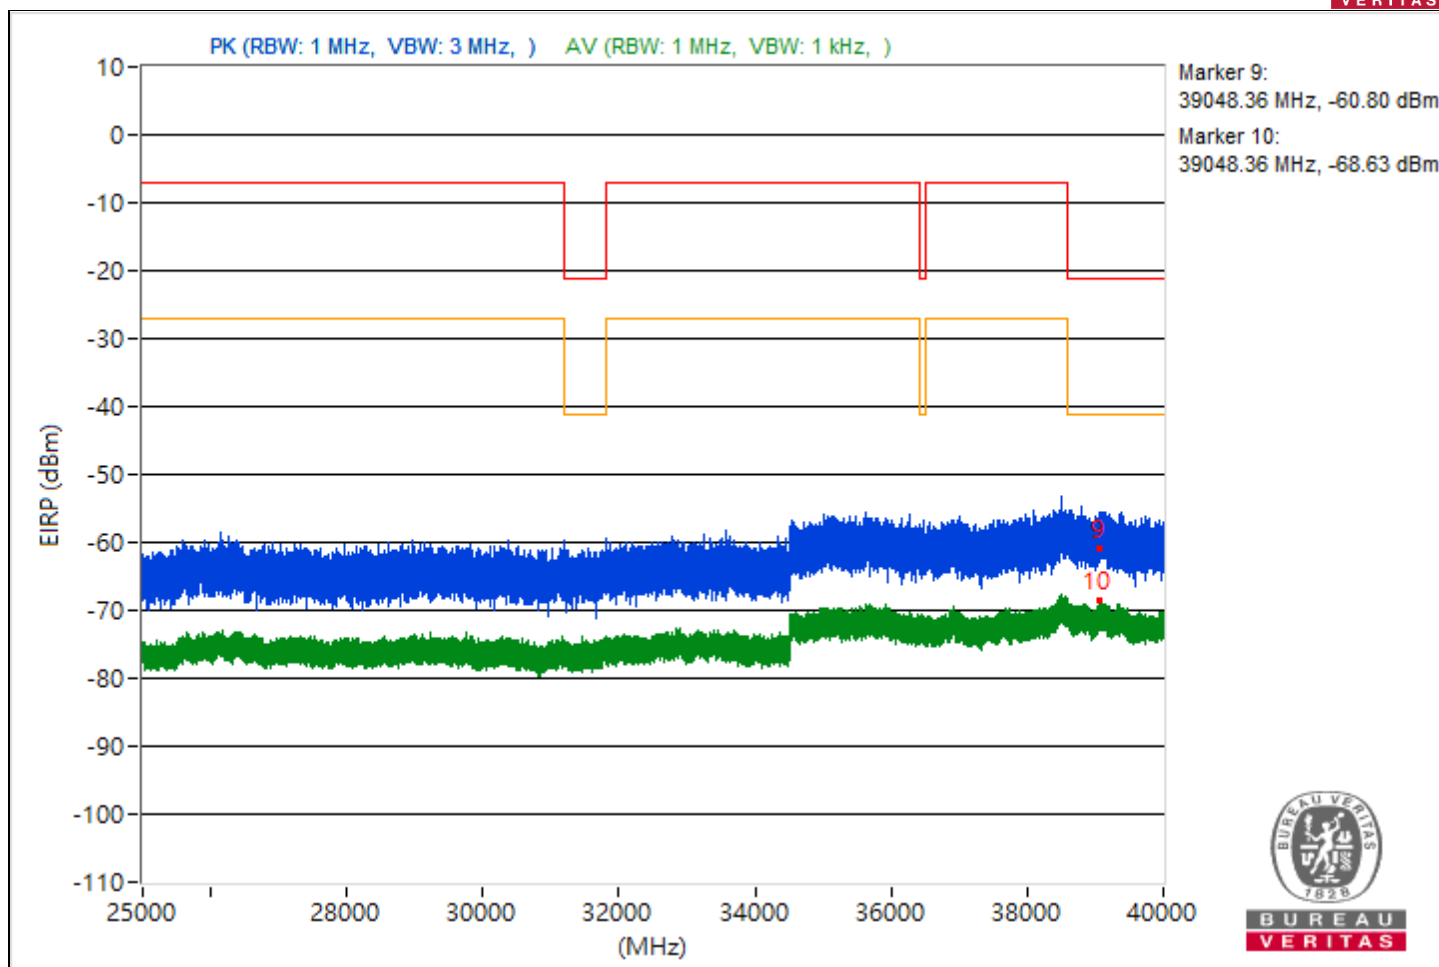


|                          |                             |             |                   |
|--------------------------|-----------------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT20) 52-tone RU | Channel     | CH 117 : 6535 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz              | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH                | Tested By   | JyunChun.Lin      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3759.79         | 36.73 PK                | 74             | -37.27      | -69.14                  | -70.37                  | 8.17                   | -58.53           |
| 2                            | 3759.79         | 25.31 AV                | 54             | -28.69      | -83.46                  | -79.62                  | 8.17                   | -69.95           |
| 3                            | 14496.98        | 39.01 PK                | 74             | -34.99      | -66.28                  | -69.01                  | 8.17                   | -56.25           |
| 4                            | 14496.98        | 26.24 AV                | 54             | -27.76      | -79.16                  | -81.56                  | 8.17                   | -69.02           |
| 5                            | 19353.9         | 34.76 PK                | 74             | -39.24      | -71.67                  | -71.69                  | 8.17                   | -60.5            |
| 6                            | 19353.9         | 28.43 AV                | 54             | -25.57      | -78.98                  | -77.21                  | 8.17                   | -66.83           |
| 7                            | 23870.2         | 38.76 PK                | 74             | -35.24      | -68.02                  | -67.38                  | 8.17                   | -56.5            |
| 8                            | 23870.2         | 29.69 AV                | 54             | -24.31      | -78.59                  | -75.46                  | 8.17                   | -65.57           |
| 9                            | 38629.24        | 34.46 PK                | 74             | -39.54      | -72.24                  | -71.73                  | 8.17                   | -60.8            |
| 10                           | 38629.24        | 26.52 AV                | 54             | -27.48      | -82.38                  | -78.36                  | 8.17                   | -68.74           |

Note: Margin value = Emission Level - Limit value

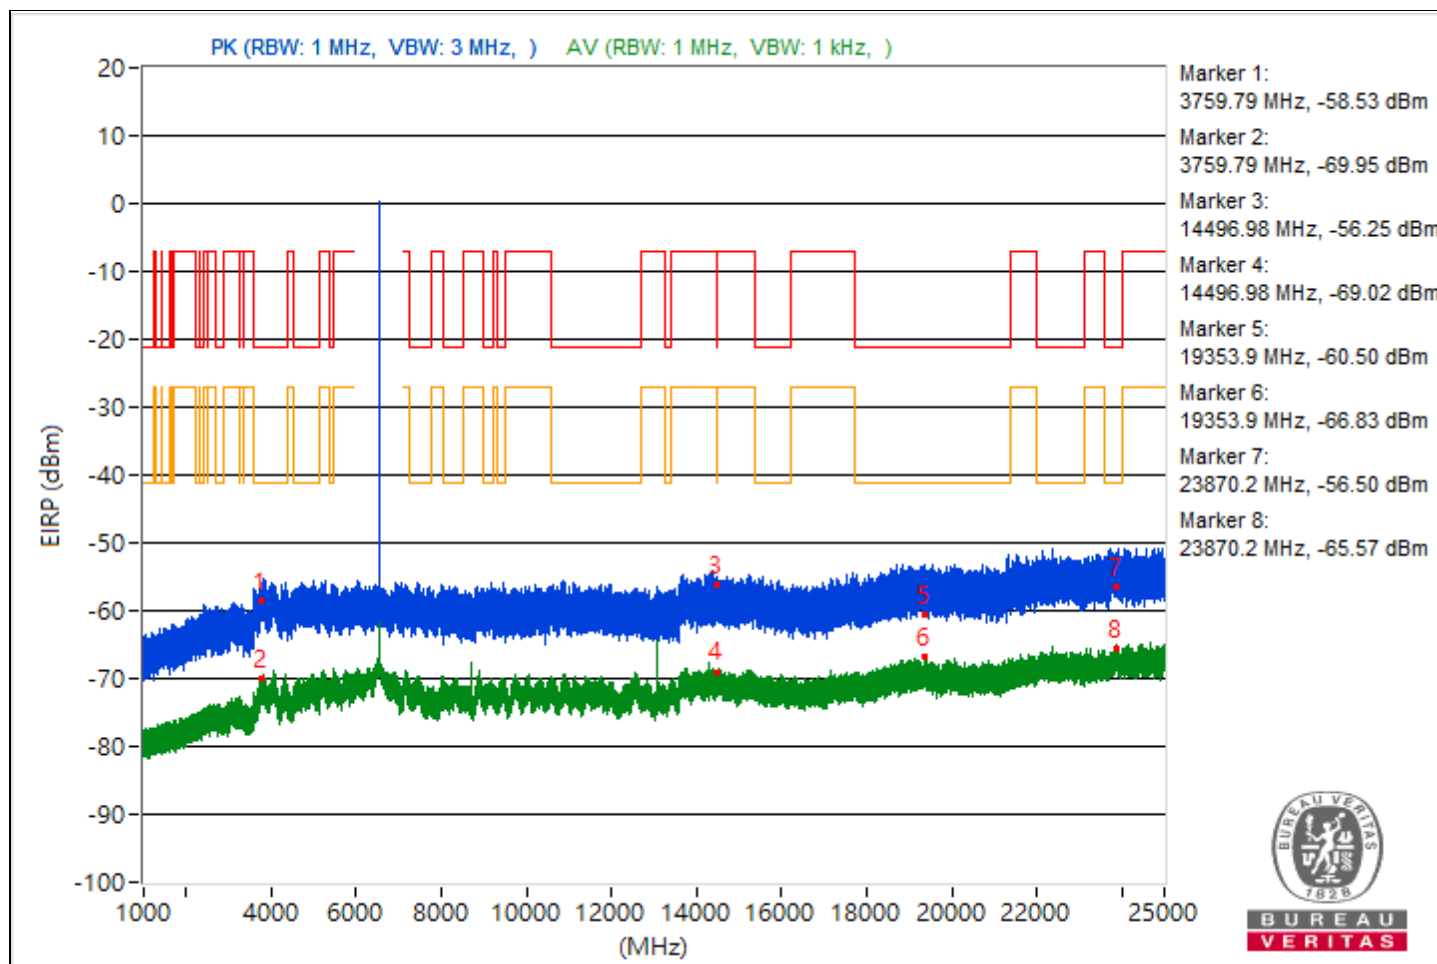


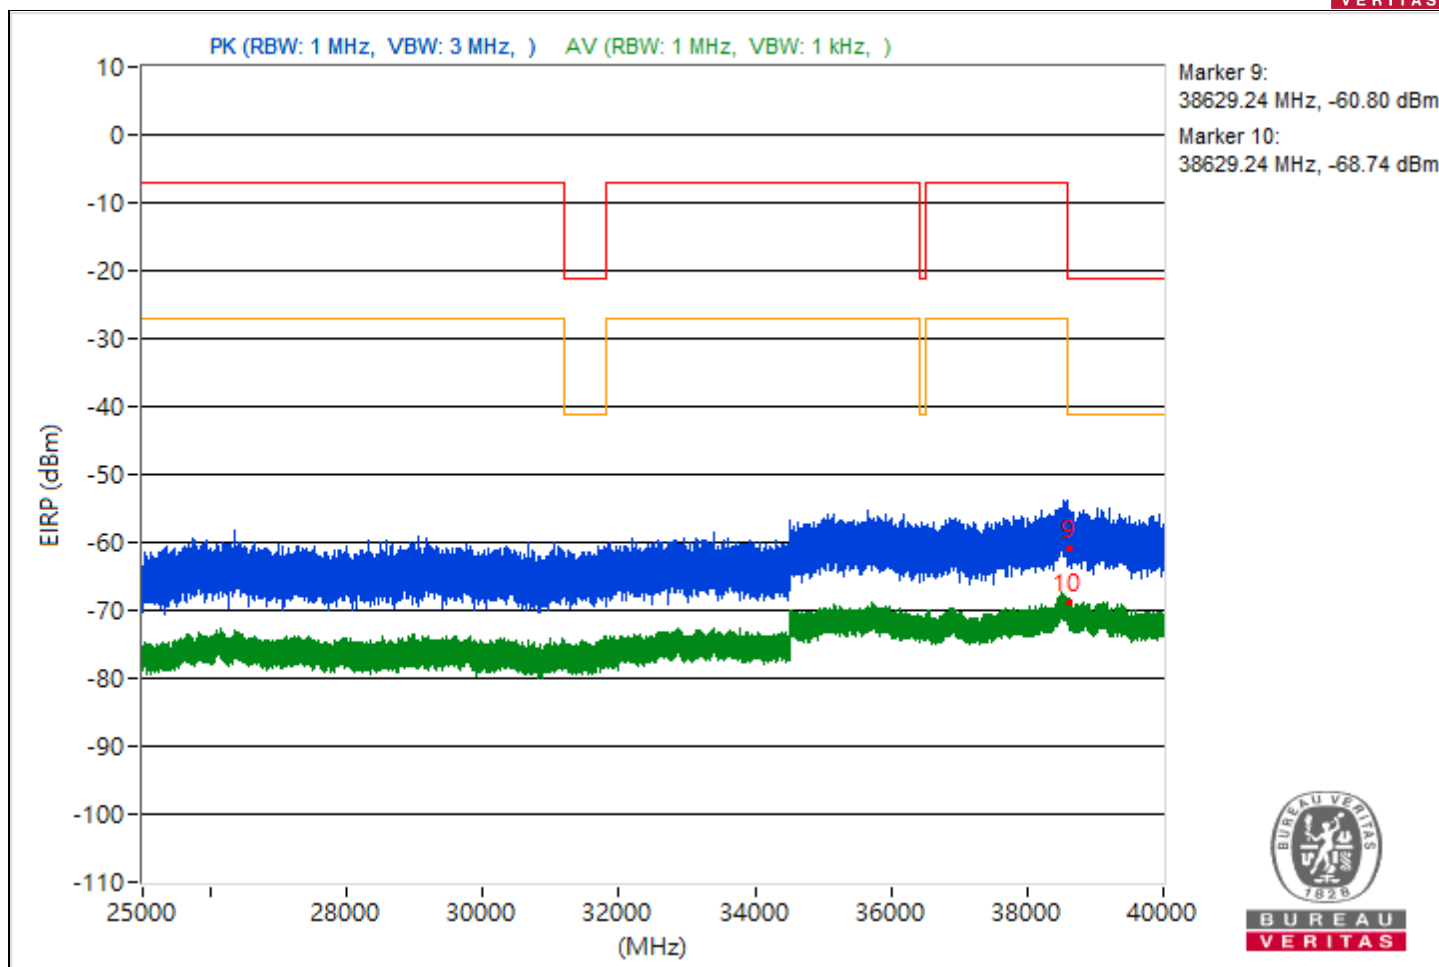


|                          |                             |             |                   |
|--------------------------|-----------------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT20) 52-tone RU | Channel     | CH 149 : 6695 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz              | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH                | Tested By   | JyunChun.Lin      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4967.13         | 36.98 PK                | 74             | -37.02      | -70.52                  | -68.6                   | 8.17                   | -58.28           |
| 2                            | 4967.13         | 25.69 AV                | 54             | -28.31      | -82.66                  | -79.43                  | 8.17                   | -69.57           |
| 3                            | 13389.87        | 40.5 PK                 | 74             | -33.5       | -69.24                  | -64.08                  | 8.17                   | -54.76           |
| 4                            | 13389.87        | 36.88 AV                | 54             | -17.12      | -76.76                  | -66.99                  | 8.17                   | -58.38           |
| 5                            | 19102.6         | 39.22 PK                | 74             | -34.78      | -66.82                  | -67.66                  | 8.17                   | -56.04           |
| 6                            | 19102.6         | 27.63 AV                | 54             | -26.37      | -81.27                  | -77.25                  | 8.17                   | -67.63           |
| 7                            | 23831.1         | 42.26 PK                | 74             | -31.74      | -66.56                  | -62.66                  | 8.17                   | -53              |
| 8                            | 23831.1         | 29.5 AV                 | 54             | -24.5       | -79.72                  | -75.26                  | 8.17                   | -65.76           |
| 9                            | 38609.87        | 37.39 PK                | 74             | -36.61      | -68.44                  | -69.76                  | 8.17                   | -57.87           |
| 10                           | 38609.87        | 26.48 AV                | 54             | -27.52      | -79.13                  | -80.99                  | 8.17                   | -68.78           |

Note: Margin value = Emission Level - Limit value

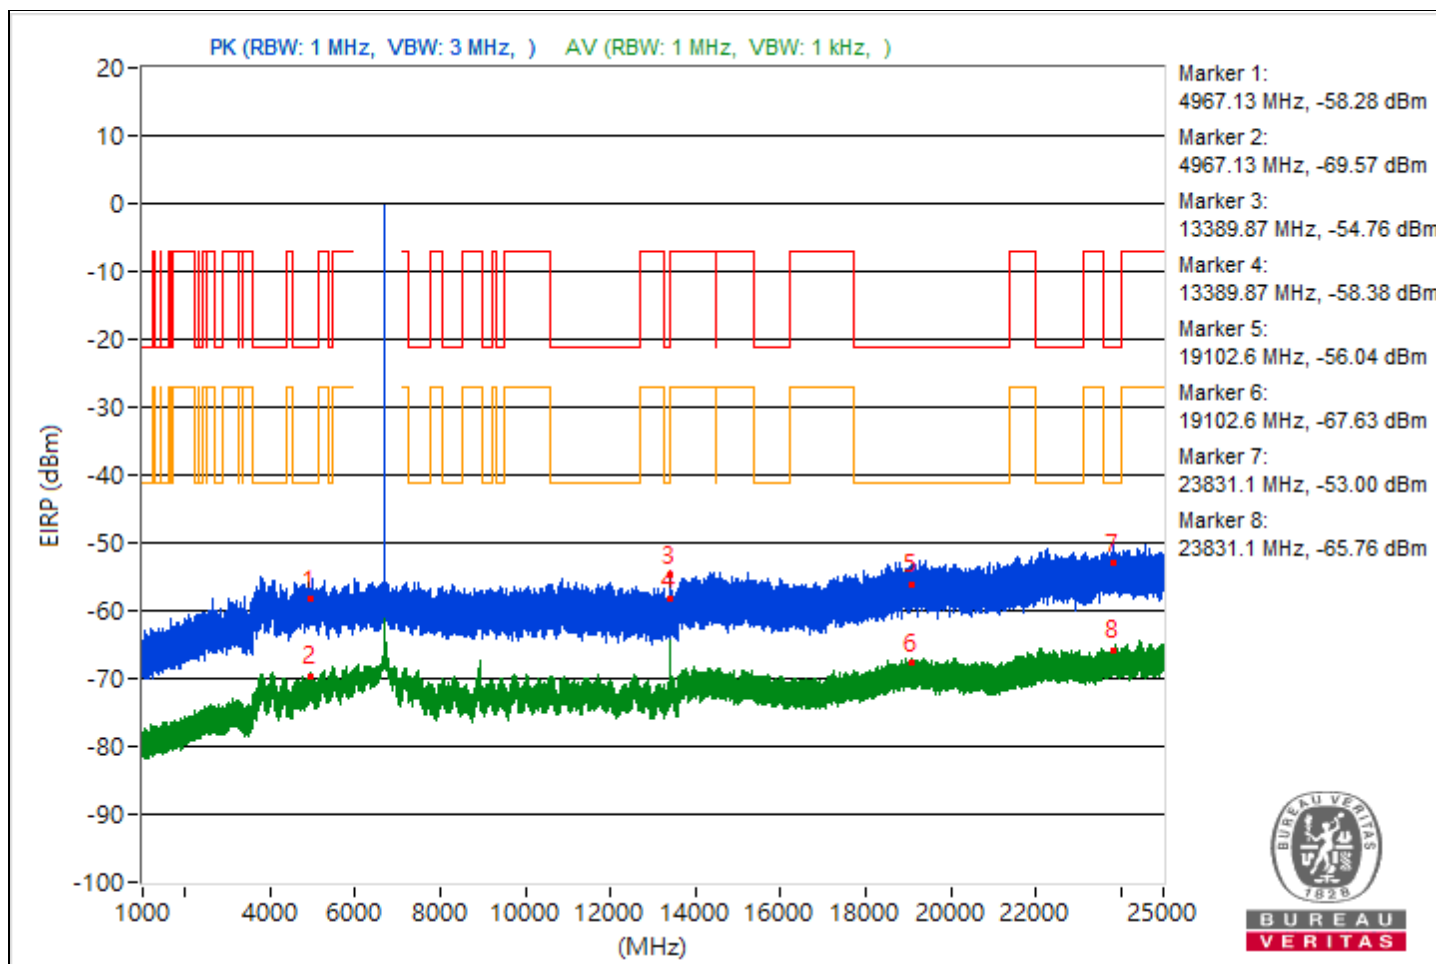

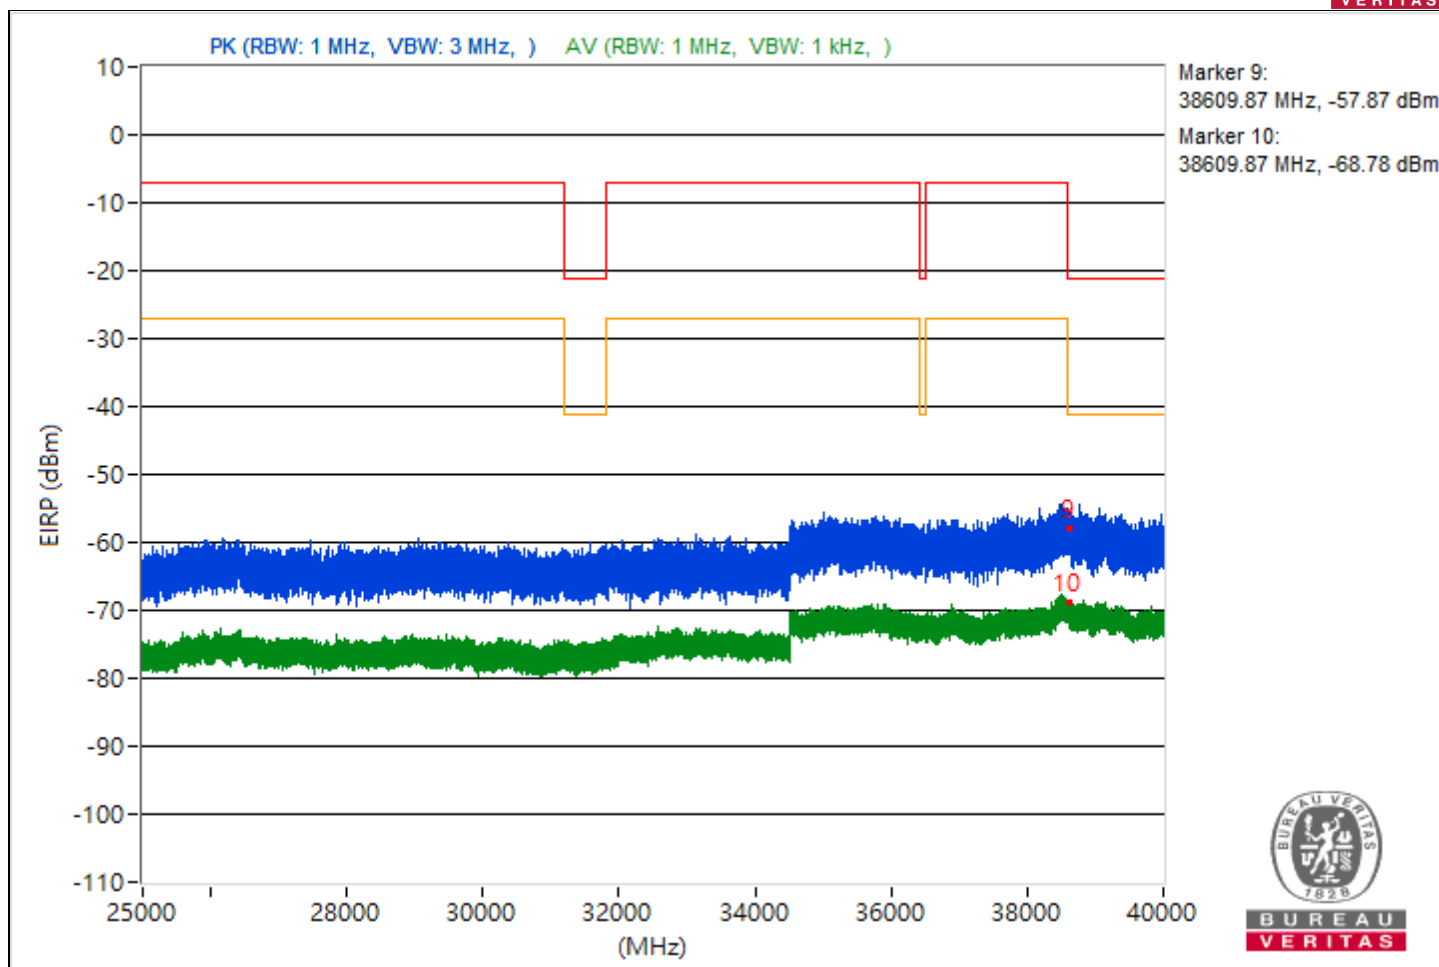





|                          |                             |             |                   |
|--------------------------|-----------------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT20) 52-tone RU | Channel     | CH 181 : 6855 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz              | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH                | Tested By   | JyunChun.Lin      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4849.77         | 35.68 PK                | 74             | -38.32      | -70.09                  | -71.56                  | 8.17                   | -59.58           |
| 2                            | 4849.77         | 25.75 AV                | 54             | -28.25      | -82.44                  | -79.45                  | 8.17                   | -69.51           |
| 3                            | 8225.96         | 37.58 PK                | 74             | -36.42      | -71.19                  | -67.36                  | 8.17                   | -57.68           |
| 4                            | 8225.96         | 30.29 AV                | 54             | -23.71      | -76.64                  | -75.71                  | 8.17                   | -64.97           |
| 5                            | 19281.3         | 37.13 PK                | 74             | -36.87      | -68.66                  | -70.06                  | 8.17                   | -58.13           |
| 6                            | 19281.3         | 28.23 AV                | 54             | -25.77      | -76.97                  | -79.95                  | 8.17                   | -67.03           |
| 7                            | 23845.3         | 41.62 PK                | 74             | -32.38      | -63.86                  | -66.05                  | 8.17                   | -53.64           |
| 8                            | 23845.3         | 29.65 AV                | 54             | -24.35      | -75.35                  | -78.95                  | 8.17                   | -65.61           |
| 9                            | 38606.67        | 34.78 PK                | 74             | -39.22      | -74.55                  | -69.95                  | 8.17                   | -60.48           |
| 10                           | 38606.67        | 26 AV                   | 54             | -28         | -78.85                  | -82.97                  | 8.17                   | -69.26           |

Note: Margin value = Emission Level - Limit value

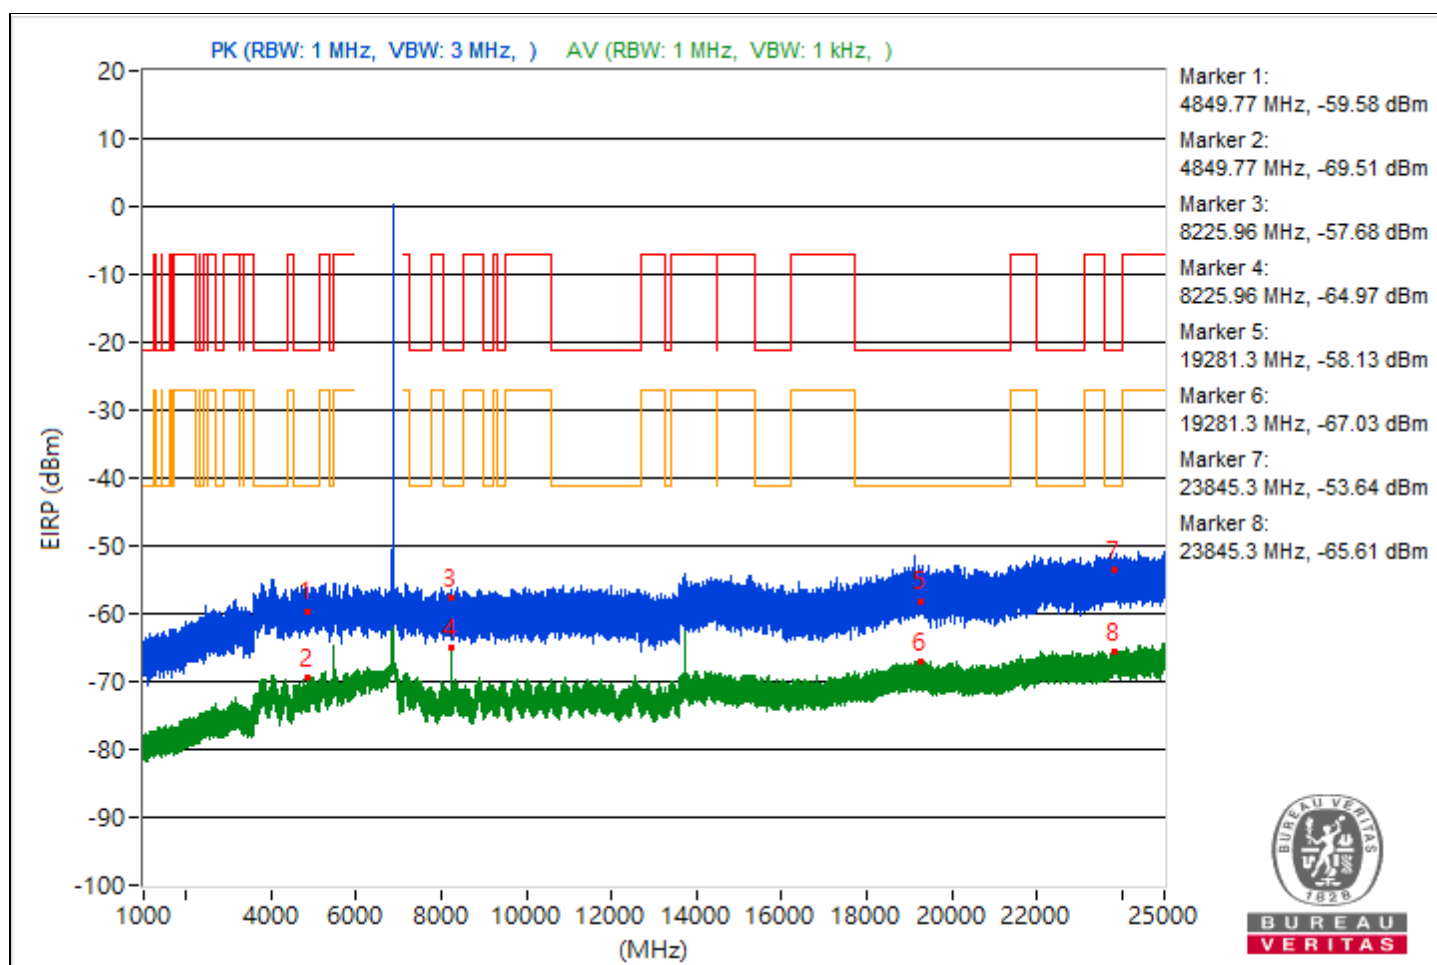


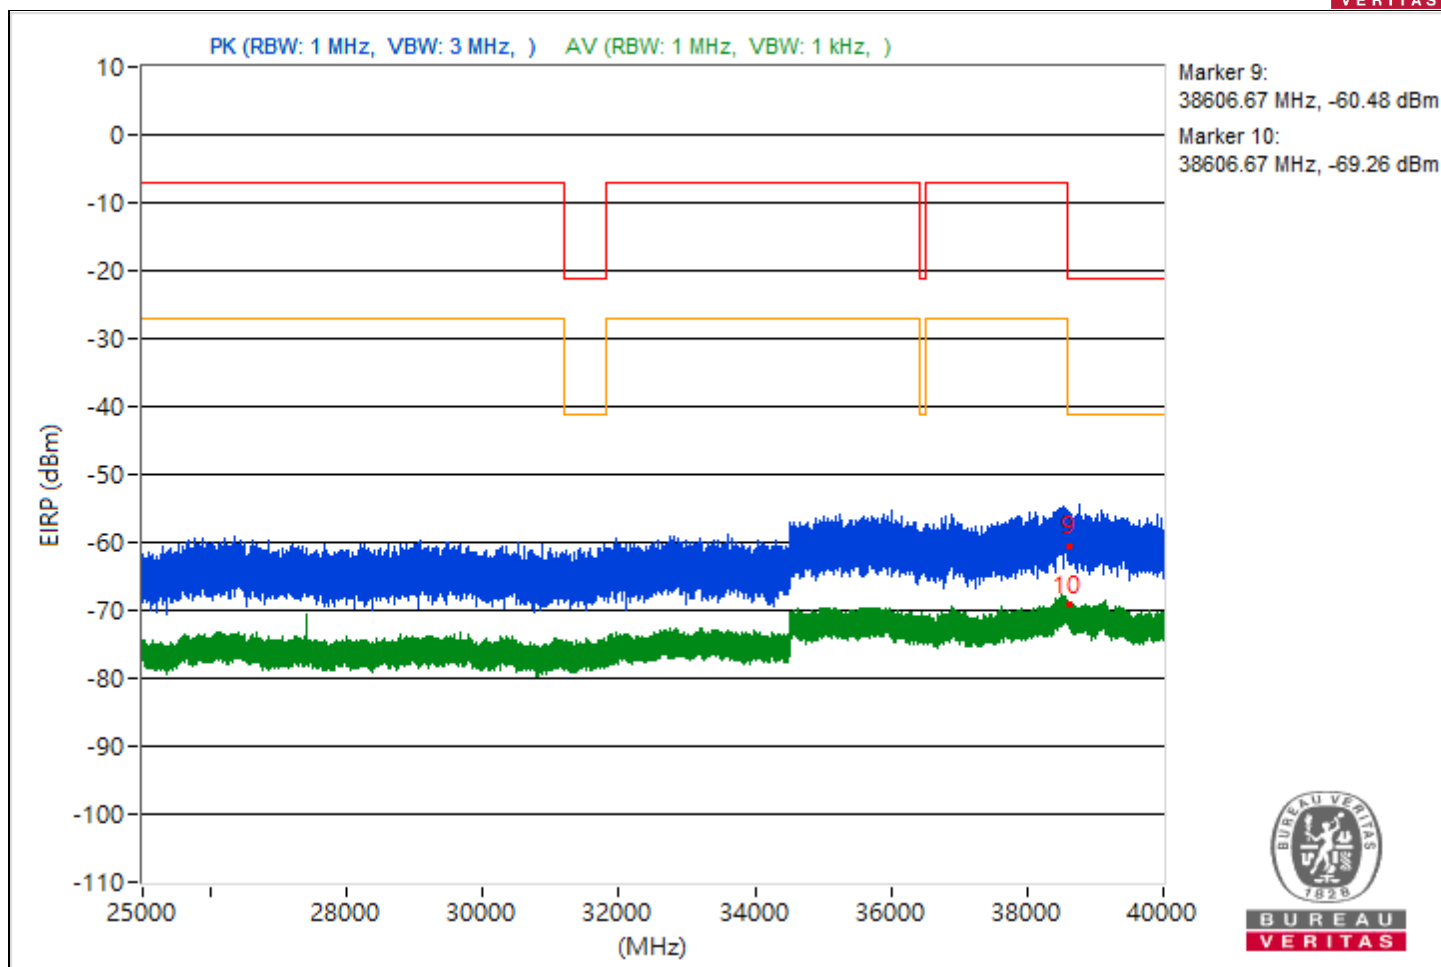


|                          |                              |             |                 |
|--------------------------|------------------------------|-------------|-----------------|
| RF Mode                  | 802.11be (EHT20) 106-tone RU | Channel     | CH 2 : 5935 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz               | Input Power | 3.3 Vdc         |
| Environmental Conditions | 24°C, 63% RH                 | Tested By   | JyunChun.Lin    |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4058.38         | 37.43 PK                | 74             | -36.57      | -69.34                  | -68.7                   | 8.17                   | -57.83           |
| 2                            | 4058.38         | 26.62 AV                | 54             | -27.38      | -78.95                  | -80.91                  | 8.17                   | -68.64           |
| 3                            | 15405.24        | 35.39 PK                | 74             | -38.61      | -69.83                  | -72.77                  | 8.17                   | -59.87           |
| 4                            | 15405.24        | 25.94 AV                | 54             | -28.06      | -82.72                  | -79.03                  | 8.17                   | -69.32           |
| 5                            | 18700.9         | 36.63 PK                | 74             | -37.37      | -68.91                  | -70.94                  | 8.17                   | -58.63           |
| 6                            | 18700.9         | 27.97 AV                | 54             | -26.03      | -80.25                  | -77.22                  | 8.17                   | -67.29           |
| 7                            | 23832.1         | 43.09 PK                | 74             | -30.91      | -62.66                  | -64.16                  | 8.17                   | -52.17           |
| 8                            | 23832.1         | 30.04 AV                | 54             | -23.96      | -74.68                  | -79.32                  | 8.17                   | -65.22           |
| 9                            | 38603.73        | 34.72 PK                | 74             | -39.28      | -71.48                  | -71.97                  | 8.17                   | -60.54           |
| 10                           | 38603.73        | 27.15 AV                | 54             | -26.85      | -78.73                  | -79.93                  | 8.17                   | -68.11           |

Note: Margin value = Emission Level - Limit value

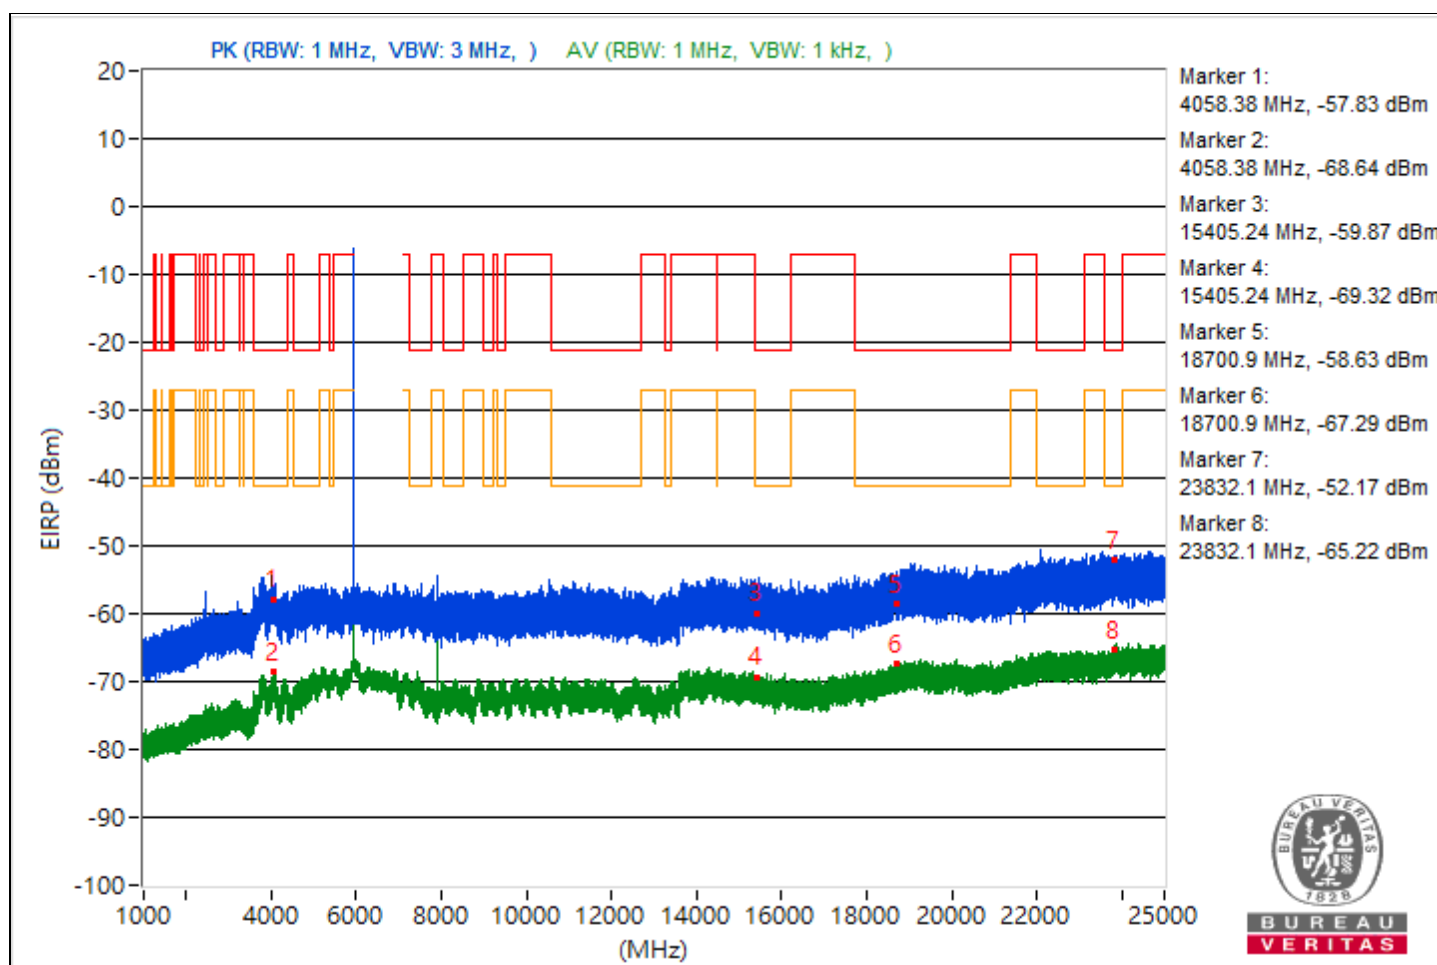


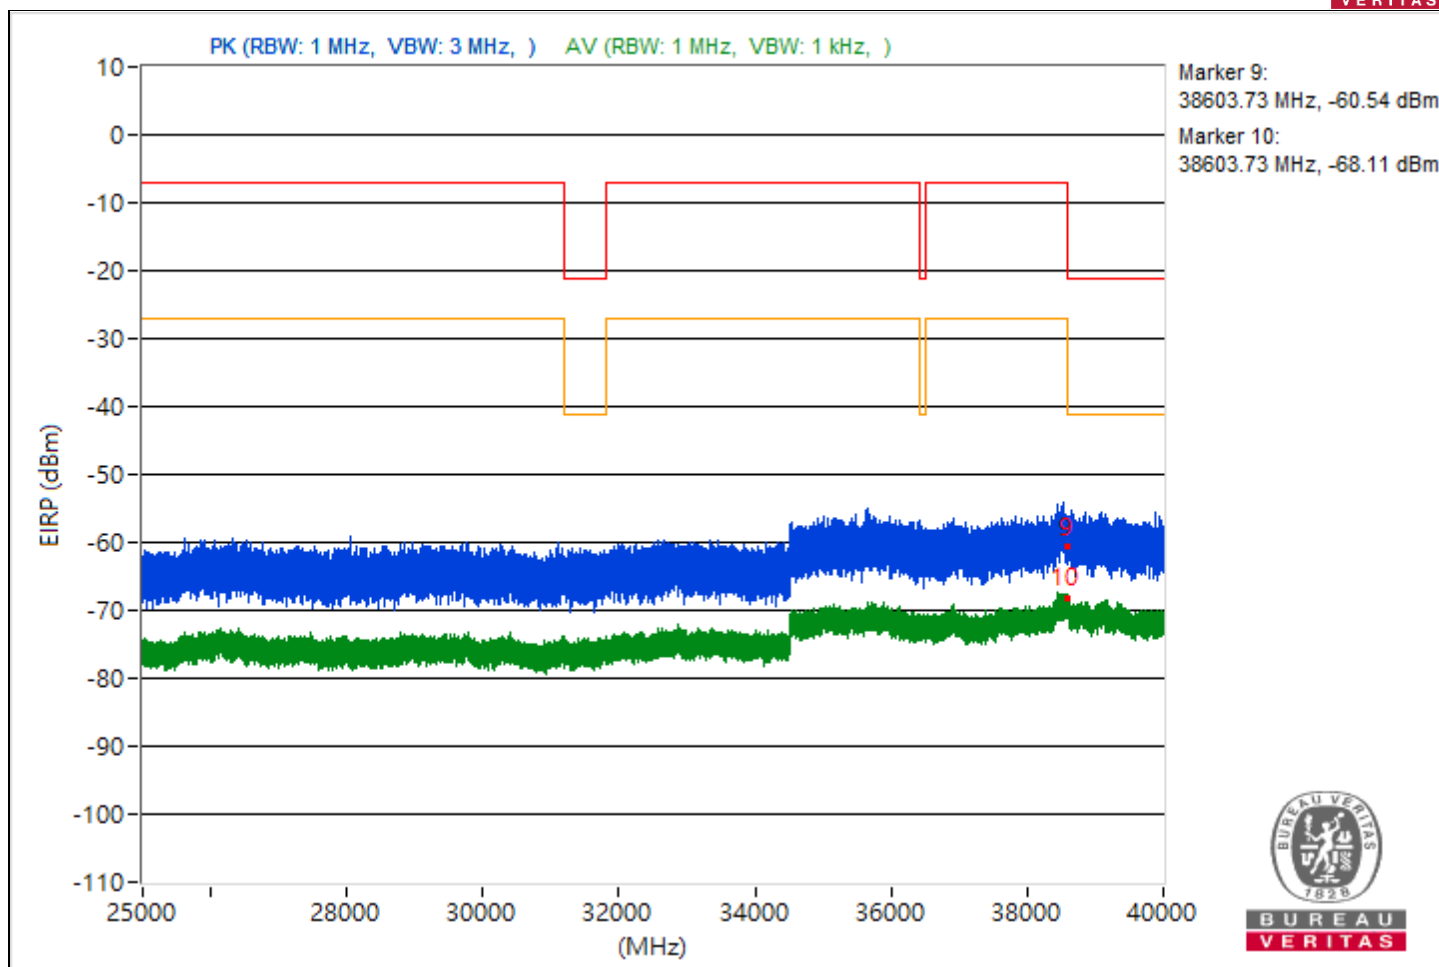


|                          |                              |             |                 |
|--------------------------|------------------------------|-------------|-----------------|
| RF Mode                  | 802.11be (EHT20) 106-tone RU | Channel     | CH 1 : 5955 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz               | Input Power | 3.3 Vdc         |
| Environmental Conditions | 24°C, 63% RH                 | Tested By   | JyunChun.Lin    |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4963.71         | 35.84 PK                | 74             | -38.16      | -71.54                  | -69.83                  | 8.17                   | -59.42           |
| 2                            | 4963.71         | 26.22 AV                | 54             | -27.78      | -79.18                  | -81.59                  | 8.17                   | -69.04           |
| 3                            | 14486.13        | 37.31 PK                | 74             | -36.69      | -67.51                  | -71.72                  | 8.17                   | -57.95           |
| 4                            | 14486.13        | 26.34 AV                | 54             | -27.66      | -79.33                  | -81.04                  | 8.17                   | -68.92           |
| 5                            | 21216.5         | 39.31 PK                | 74             | -34.69      | -65.66                  | -69.38                  | 8.17                   | -55.95           |
| 6                            | 21216.5         | 27.94 AV                | 54             | -26.06      | -76.92                  | -81.03                  | 8.17                   | -67.32           |
| 7                            | 23851.8         | 40.58 PK                | 74             | -33.42      | -64.43                  | -68.03                  | 8.17                   | -54.68           |
| 8                            | 23851.8         | 29.74 AV                | 54             | -24.26      | -78.12                  | -75.63                  | 8.17                   | -65.52           |
| 9                            | 38609.6         | 36.37 PK                | 74             | -37.63      | -70.97                  | -69.33                  | 8.17                   | -58.89           |
| 10                           | 38609.6         | 25.83 AV                | 54             | -28.17      | -79.1                   | -82.93                  | 8.17                   | -69.43           |

Note: Margin value = Emission Level - Limit value

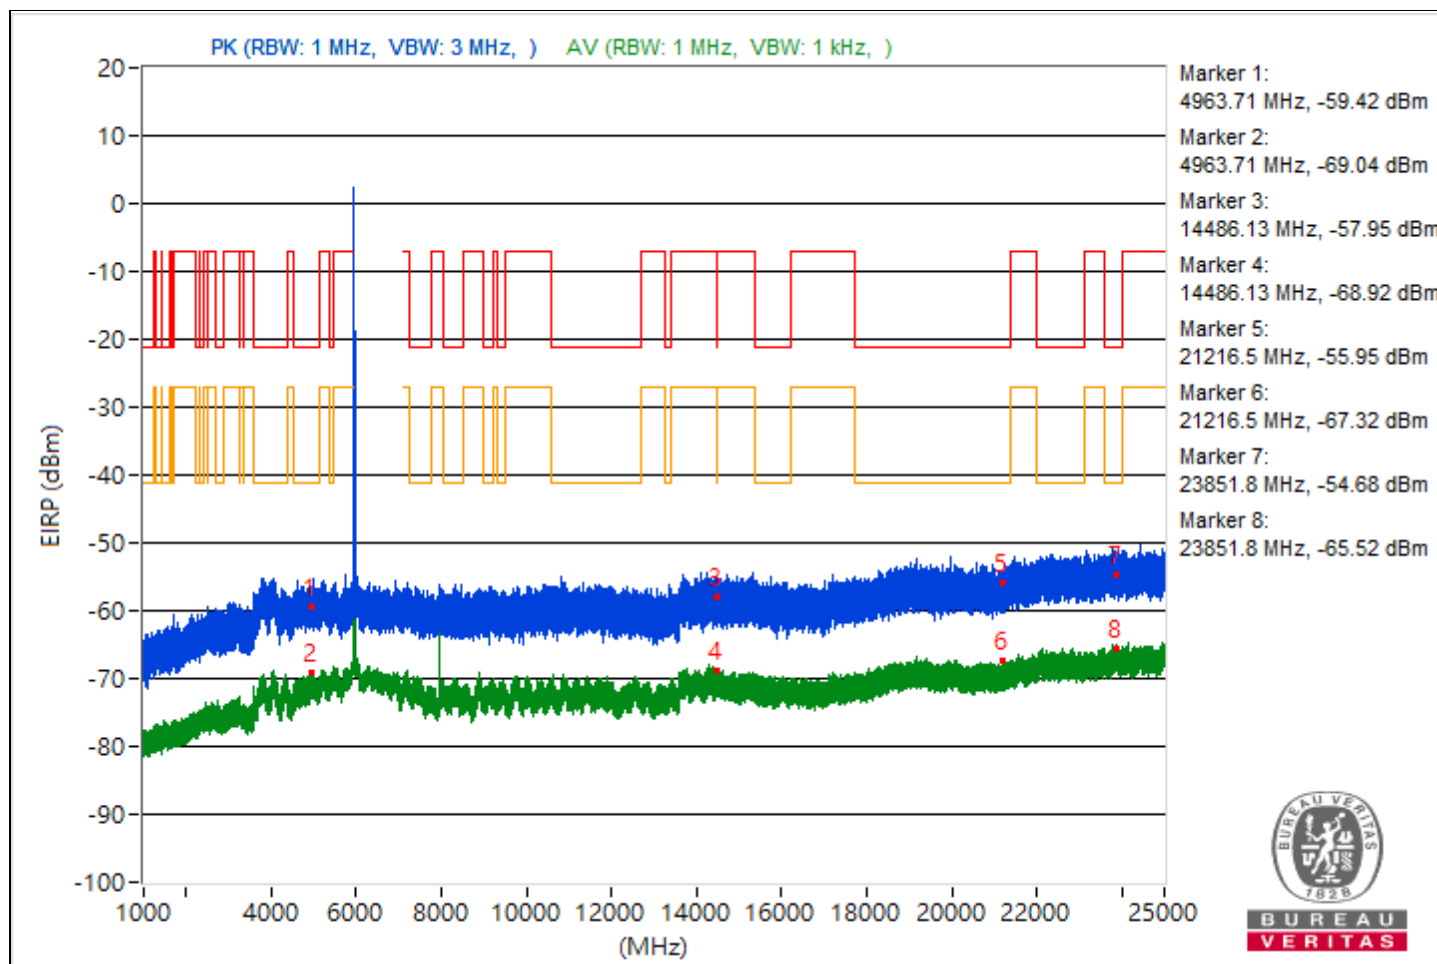


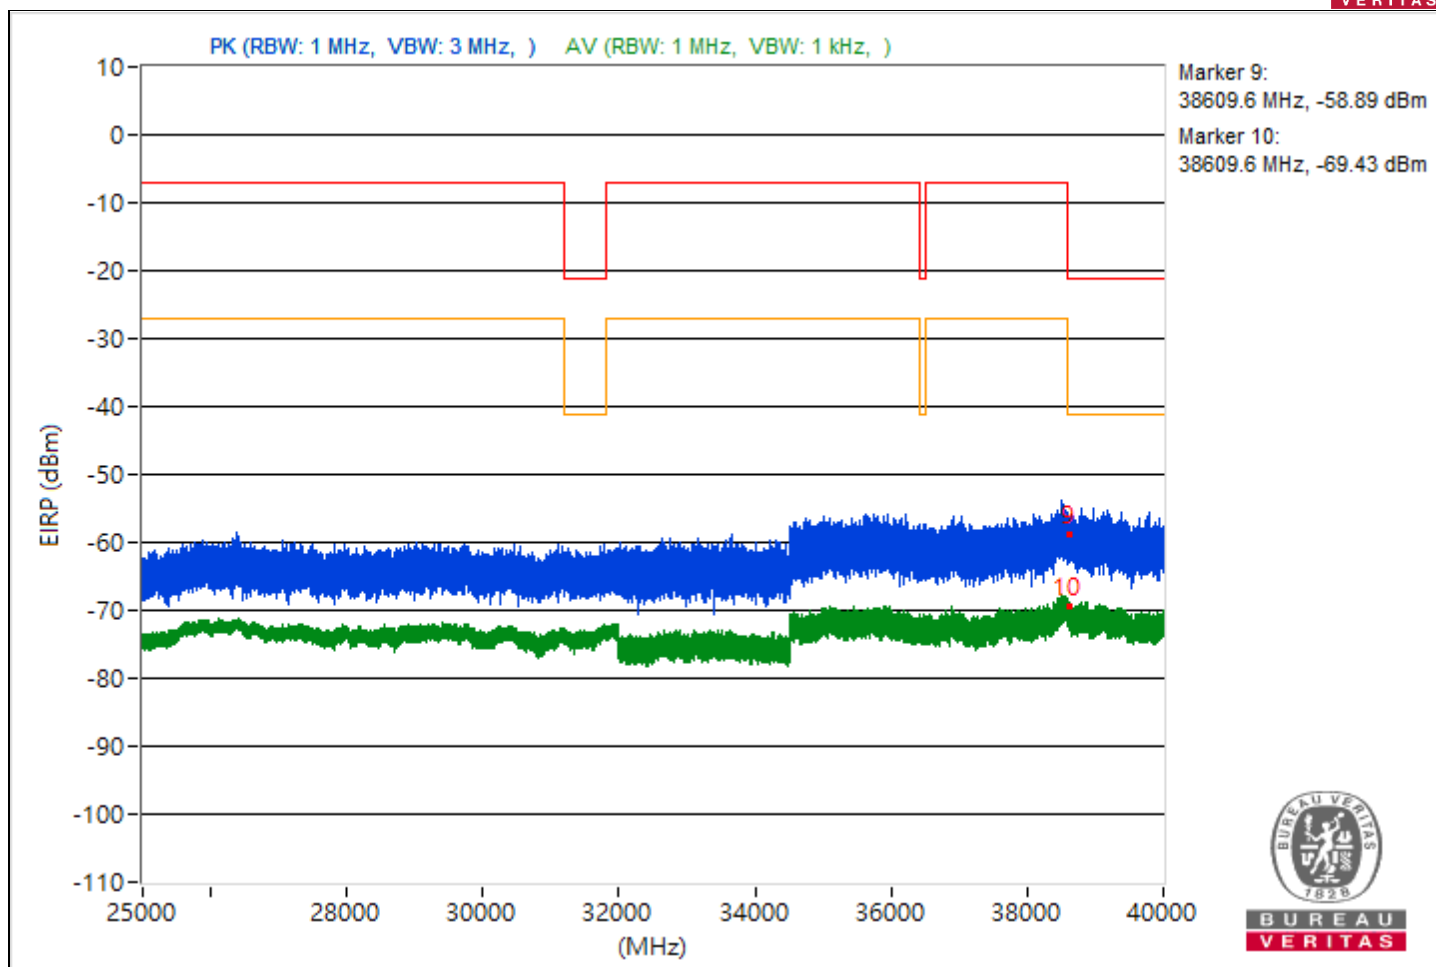


|                          |                              |             |                  |
|--------------------------|------------------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT20) 106-tone RU | Channel     | CH 45 : 6175 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz               | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 63% RH                 | Tested By   | JyunChun.Lin     |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 3810.97         | 38.13 PK                | 74             | -35.87      | -67.41                  | -69.44                  | 8.17                   | -57.13           |
| 2                            | 3810.97         | 26.2 AV                 | 54             | -27.8       | -79.17                  | -81.66                  | 8.17                   | -69.06           |
| 3                            | 8233.24         | 39.35 PK                | 74             | -34.65      | -65.26                  | -70.31                  | 8.17                   | -55.91           |
| 4                            | 8233.24         | 30.67 AV                | 54             | -23.33      | -75.03                  | -76.65                  | 8.17                   | -64.59           |
| 5                            | 20811.2         | 36.88 PK                | 74             | -37.12      | -68.65                  | -70.71                  | 8.17                   | -58.38           |
| 6                            | 20811.2         | 27.91 AV                | 54             | -26.09      | -79.88                  | -77.5                   | 8.17                   | -67.35           |
| 7                            | 23897.7         | 41.29 PK                | 74             | -32.71      | -65.02                  | -65.28                  | 8.17                   | -53.97           |
| 8                            | 23897.7         | 30.08 AV                | 54             | -23.92      | -75.14                  | -78.08                  | 8.17                   | -65.18           |
| 9                            | 38613.87        | 35.55 PK                | 74             | -38.45      | -70.56                  | -71.25                  | 8.17                   | -59.71           |
| 10                           | 38613.87        | 26.56 AV                | 54             | -27.44      | -78.1                   | -82.96                  | 8.17                   | -68.7            |

Note: Margin value = Emission Level - Limit value

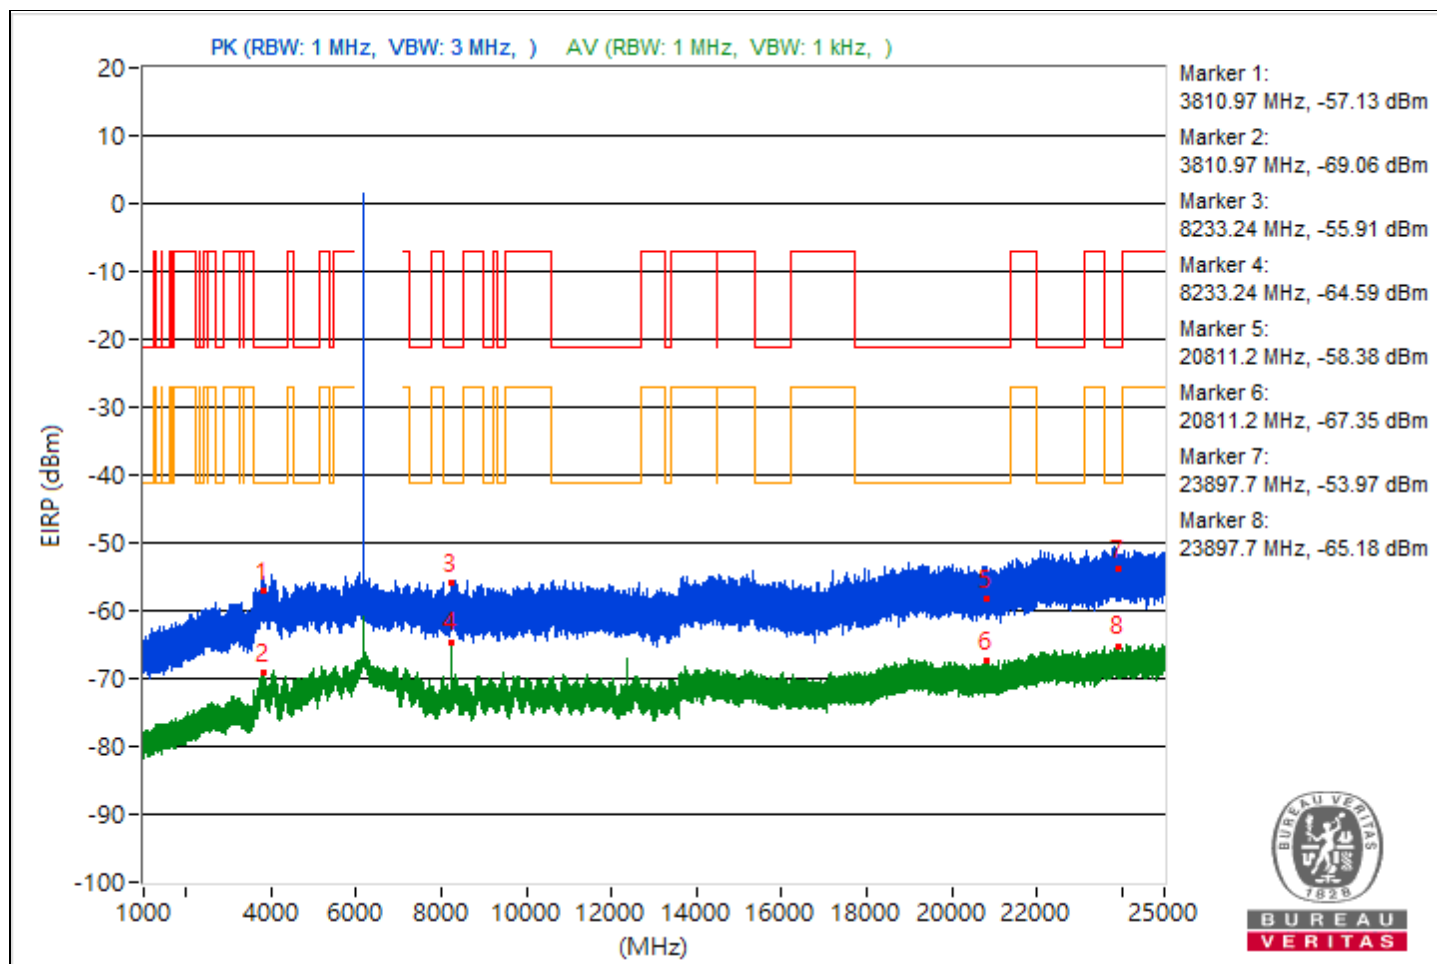

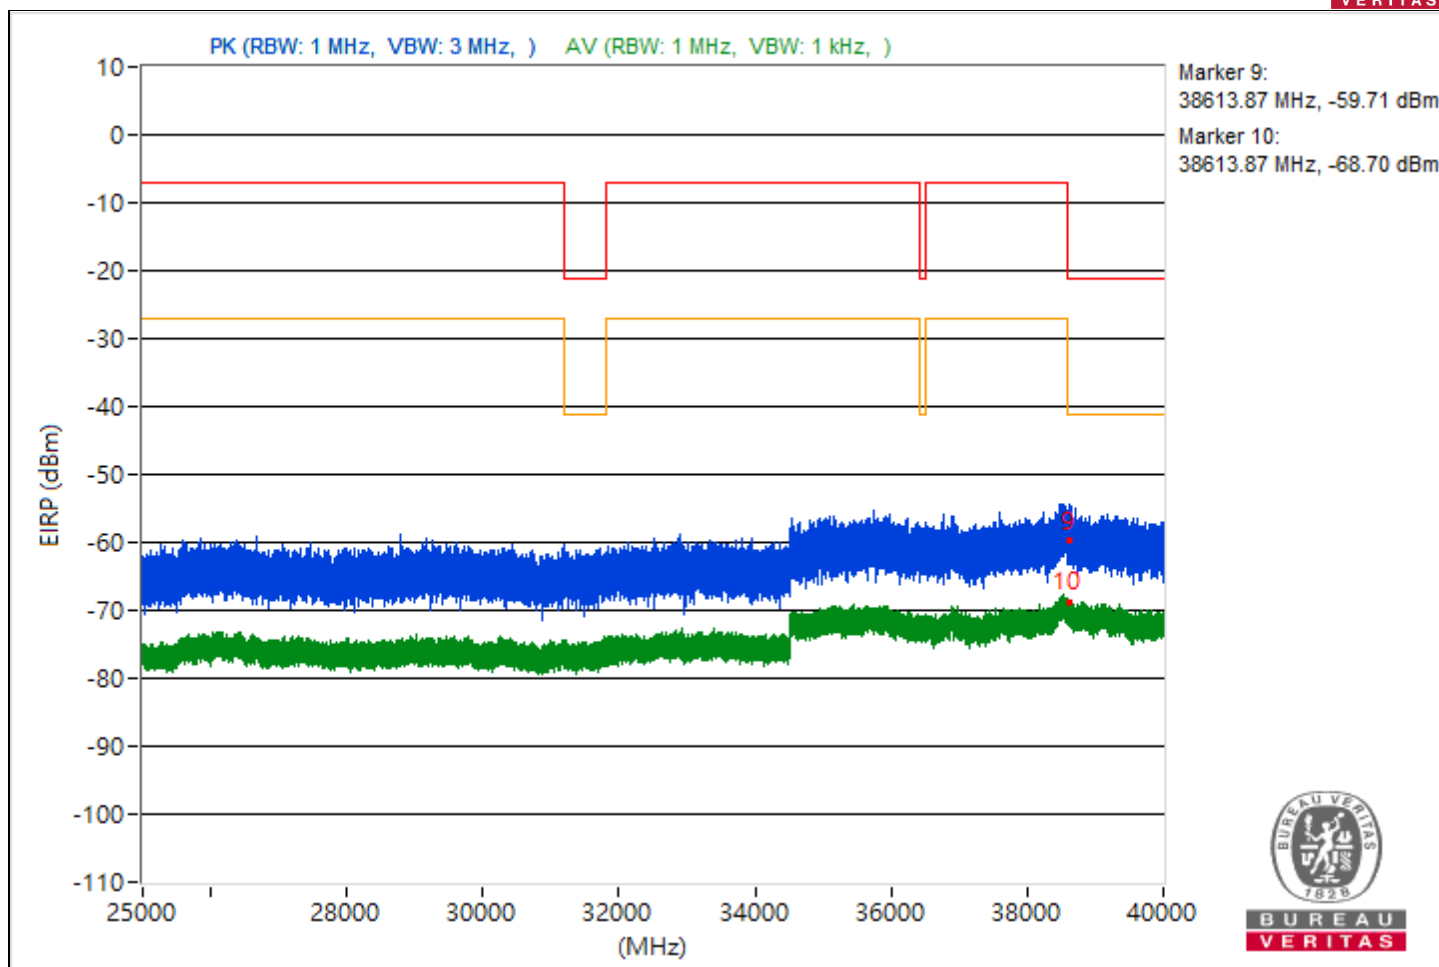





|                          |                              |             |                  |
|--------------------------|------------------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT20) 106-tone RU | Channel     | CH 93 : 6415 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz               | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 63% RH                 | Tested By   | JyunChun.Lin     |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4996.77         | 37.55 PK                | 74             | -36.45      | -67.9                   | -70.18                  | 8.17                   | -57.71           |
| 2                            | 4996.77         | 25.55 AV                | 54             | -28.45      | -79.35                  | -83.3                   | 8.17                   | -69.71           |
| 3                            | 14485.6         | 37.47 PK                | 74             | -36.53      | -70.95                  | -67.61                  | 8.17                   | -57.79           |
| 4                            | 14485.6         | 26.35 AV                | 54             | -27.65      | -79.25                  | -81.12                  | 8.17                   | -68.91           |
| 5                            | 19227.8         | 39.22 PK                | 74             | -34.78      | -65.55                  | -69.98                  | 8.17                   | -56.04           |
| 6                            | 19227.8         | 27.85 AV                | 54             | -26.15      | -77.16                  | -80.76                  | 8.17                   | -67.41           |
| 7                            | 23859.6         | 40.75 PK                | 74             | -33.25      | -64.49                  | -67.35                  | 8.17                   | -54.51           |
| 8                            | 23859.6         | 30.25 AV                | 54             | -23.75      | -74.82                  | -78.21                  | 8.17                   | -65.01           |
| 9                            | 38600.98        | 36.21 PK                | 74             | -37.79      | -69.74                  | -70.8                   | 8.17                   | -59.05           |
| 10                           | 38600.98        | 26.98 AV                | 54             | -27.02      | -78.75                  | -80.32                  | 8.17                   | -68.28           |

Note: Margin value = Emission Level - Limit value

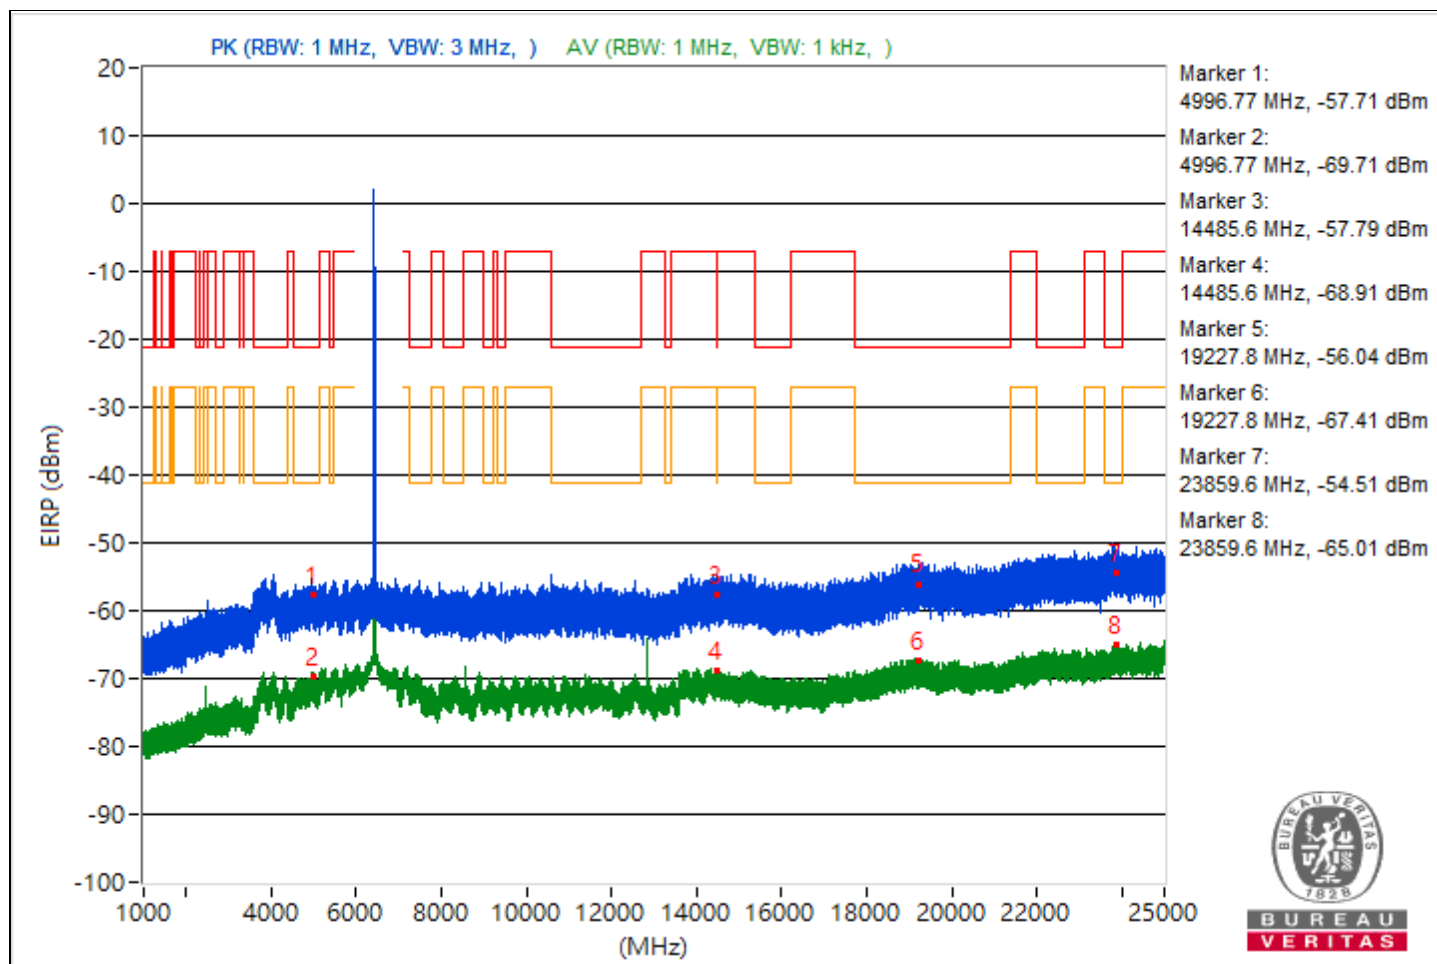


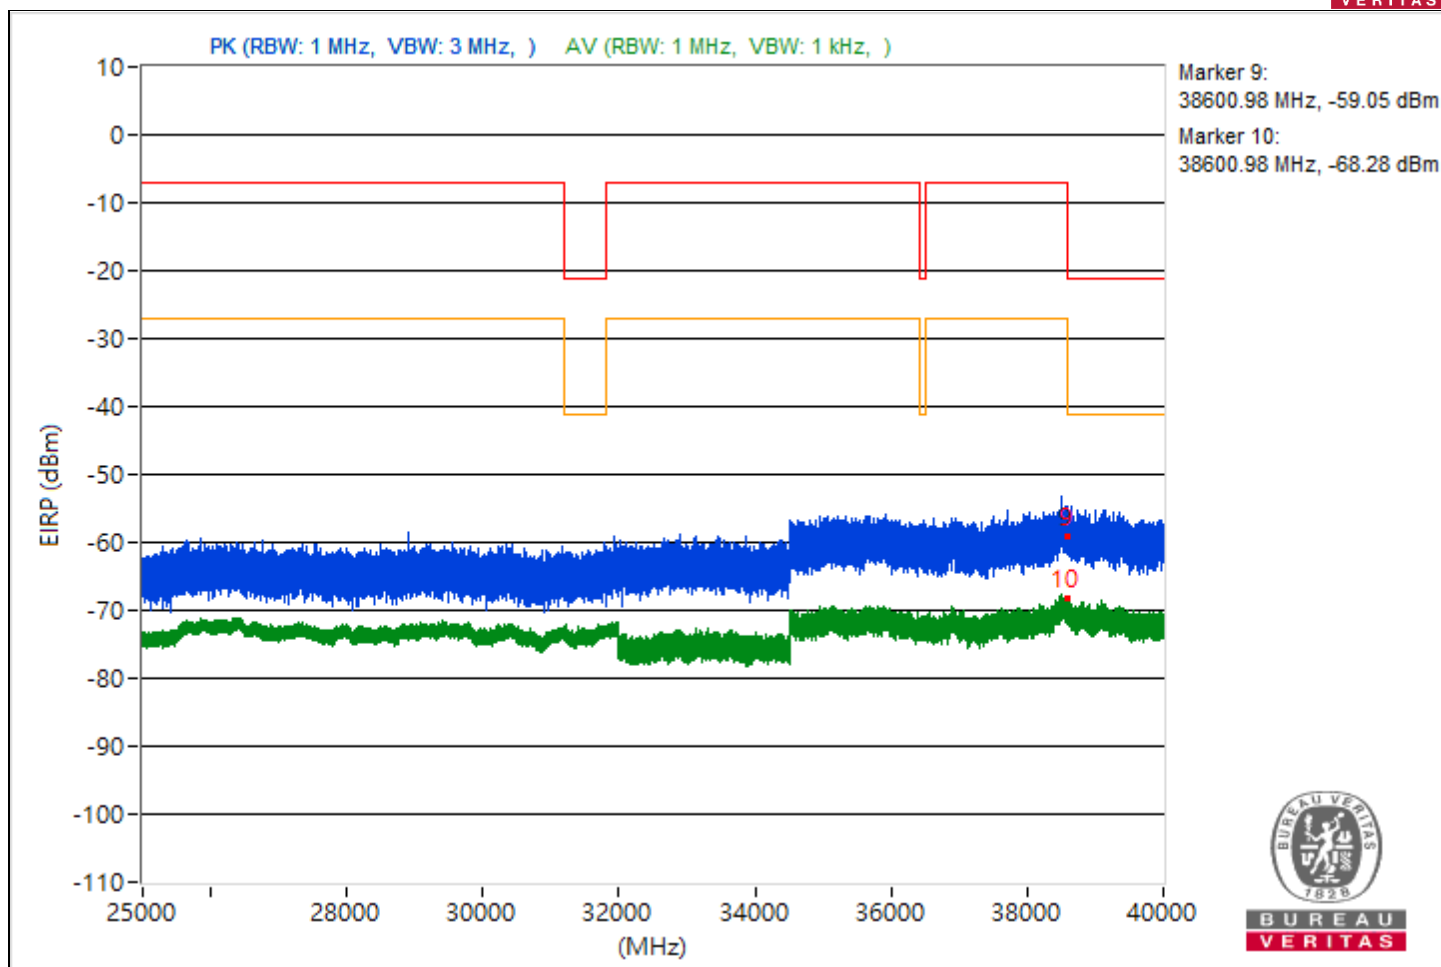


|                          |                              |             |                   |
|--------------------------|------------------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT20) 106-tone RU | Channel     | CH 117 : 6535 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz               | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH                 | Tested By   | JyunChun.Lin      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5456.51         | 35.04 PK                | 74             | -38.96      | -72.52                  | -70.52                  | 8.17                   | -60.22           |
| 2                            | 5456.51         | 26.48 AV                | 54             | -27.52      | -80.5                   | -79.48                  | 8.17                   | -68.78           |
| 3                            | 14472           | 38.05 PK                | 74             | -35.95      | -69.09                  | -67.78                  | 8.17                   | -57.21           |
| 4                            | 14472           | 26.01 AV                | 54             | -27.99      | -78.96                  | -82.67                  | 8.17                   | -69.25           |
| 5                            | 19431.1         | 40.46 PK                | 74             | -33.54      | -66.83                  | -65.28                  | 8.17                   | -54.8            |
| 6                            | 19431.1         | 27.81 AV                | 54             | -26.19      | -80.06                  | -77.55                  | 8.17                   | -67.45           |
| 7                            | 23818           | 41.97 PK                | 74             | -32.03      | -64.22                  | -64.73                  | 8.17                   | -53.29           |
| 8                            | 23818           | 30.2 AV                 | 54             | -23.8       | -77.49                  | -75.27                  | 8.17                   | -65.06           |
| 9                            | 38603.11        | 36.69 PK                | 74             | -37.31      | -70.91                  | -68.83                  | 8.17                   | -58.57           |
| 10                           | 38603.11        | 26.5 AV                 | 54             | -27.5       | -81.29                  | -78.91                  | 8.17                   | -68.76           |

Note: Margin value = Emission Level - Limit value

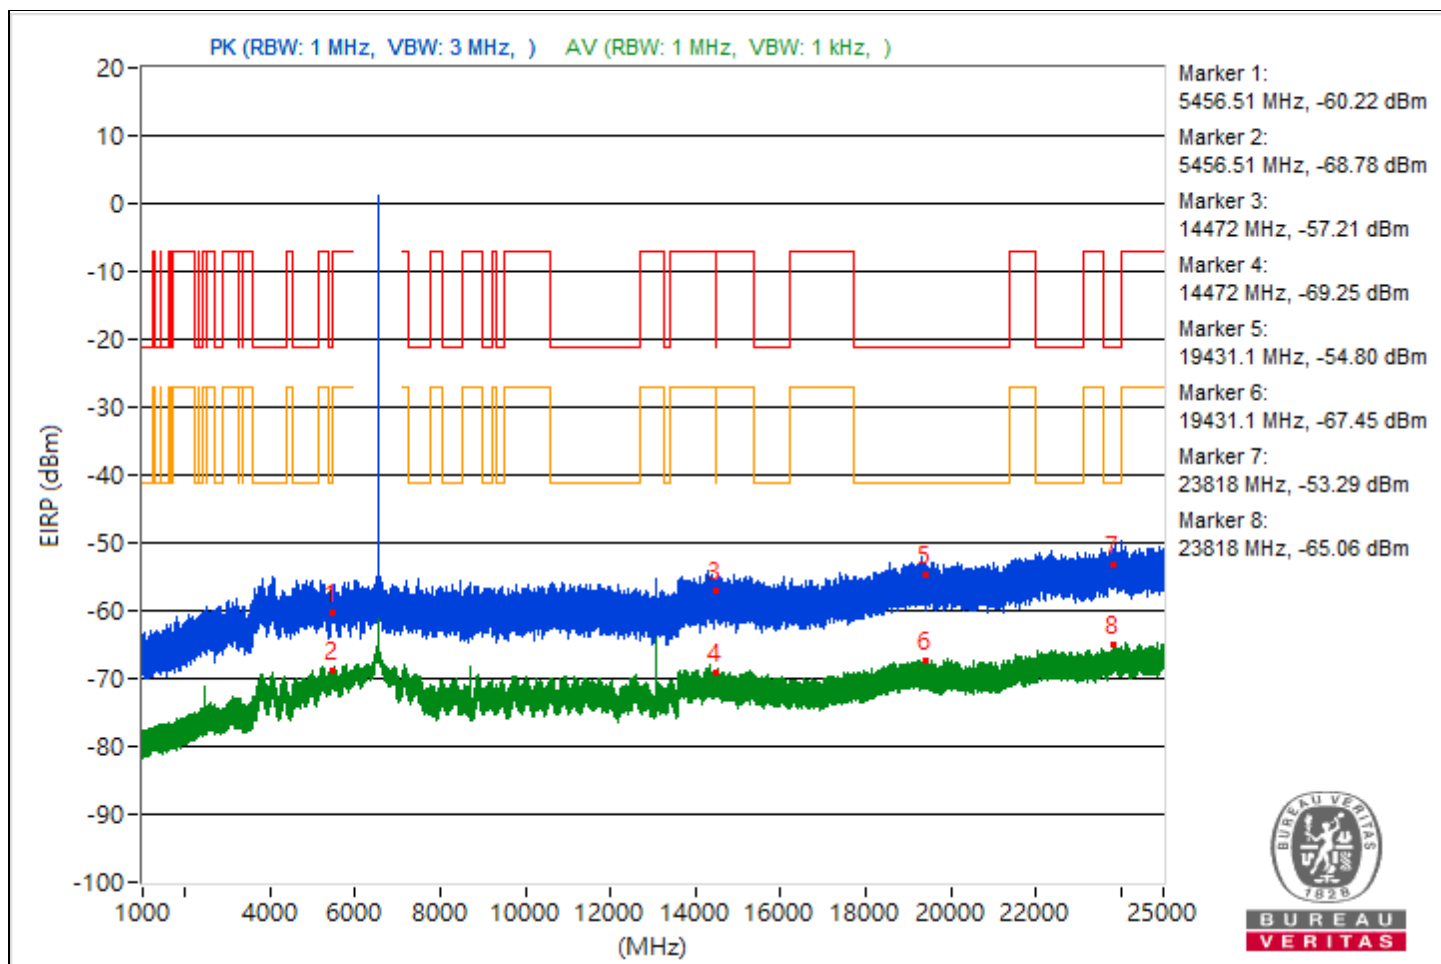


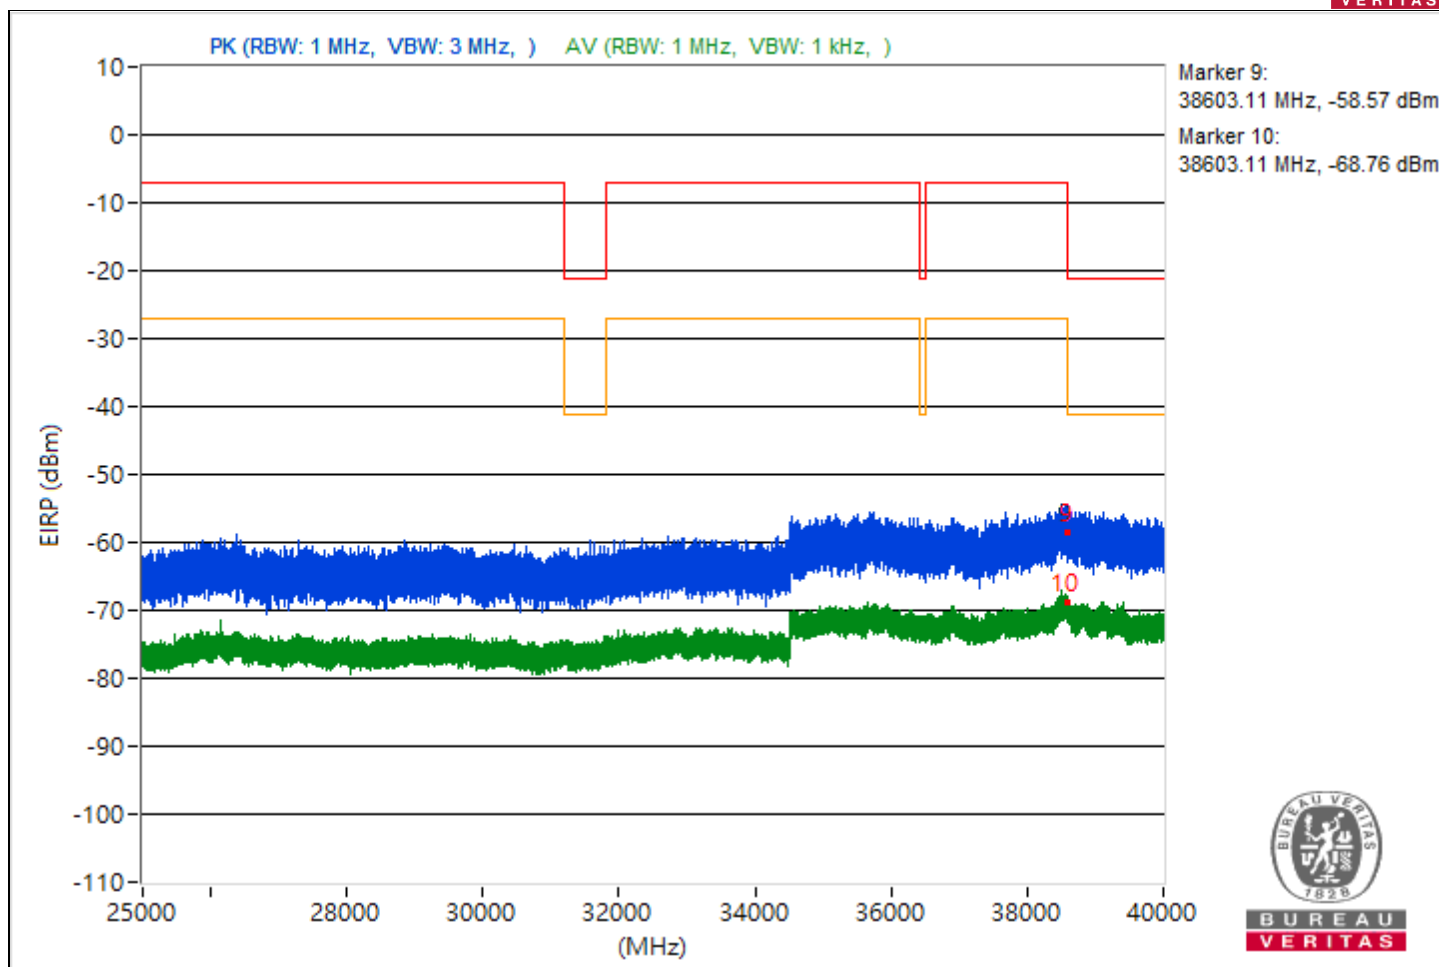


|                          |                              |             |                   |
|--------------------------|------------------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT20) 106-tone RU | Channel     | CH 149 : 6695 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz               | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH                 | Tested By   | JyunChun.Lin      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4057.52         | 37.74 PK                | 74             | -36.26      | -69.79                  | -67.82                  | 8.17                   | -57.52           |
| 2                            | 4057.52         | 26.44 AV                | 54             | -27.56      | -81.1                   | -79.12                  | 8.17                   | -68.82           |
| 3                            | 13389.78        | 40.52 PK                | 74             | -33.48      | -69.87                  | -63.89                  | 8.17                   | -54.74           |
| 4                            | 13389.78        | 37.25 AV                | 54             | -16.75      | -75.97                  | -66.66                  | 8.17                   | -58.01           |
| 5                            | 19316.6         | 37.79 PK                | 74             | -36.21      | -68.88                  | -68.44                  | 8.17                   | -57.47           |
| 6                            | 19316.6         | 28.52 AV                | 54             | -25.48      | -79.61                  | -76.71                  | 8.17                   | -66.74           |
| 7                            | 23726.4         | 39.27 PK                | 74             | -34.73      | -66.22                  | -68.39                  | 8.17                   | -55.99           |
| 8                            | 23726.4         | 29.61 AV                | 54             | -24.39      | -78.8                   | -75.48                  | 8.17                   | -65.65           |
| 9                            | 38603.29        | 36.33 PK                | 74             | -37.67      | -69.7                   | -70.56                  | 8.17                   | -58.93           |
| 10                           | 38603.29        | 26.56 AV                | 54             | -27.44      | -78.77                  | -81.39                  | 8.17                   | -68.7            |

Note: Margin value = Emission Level - Limit value

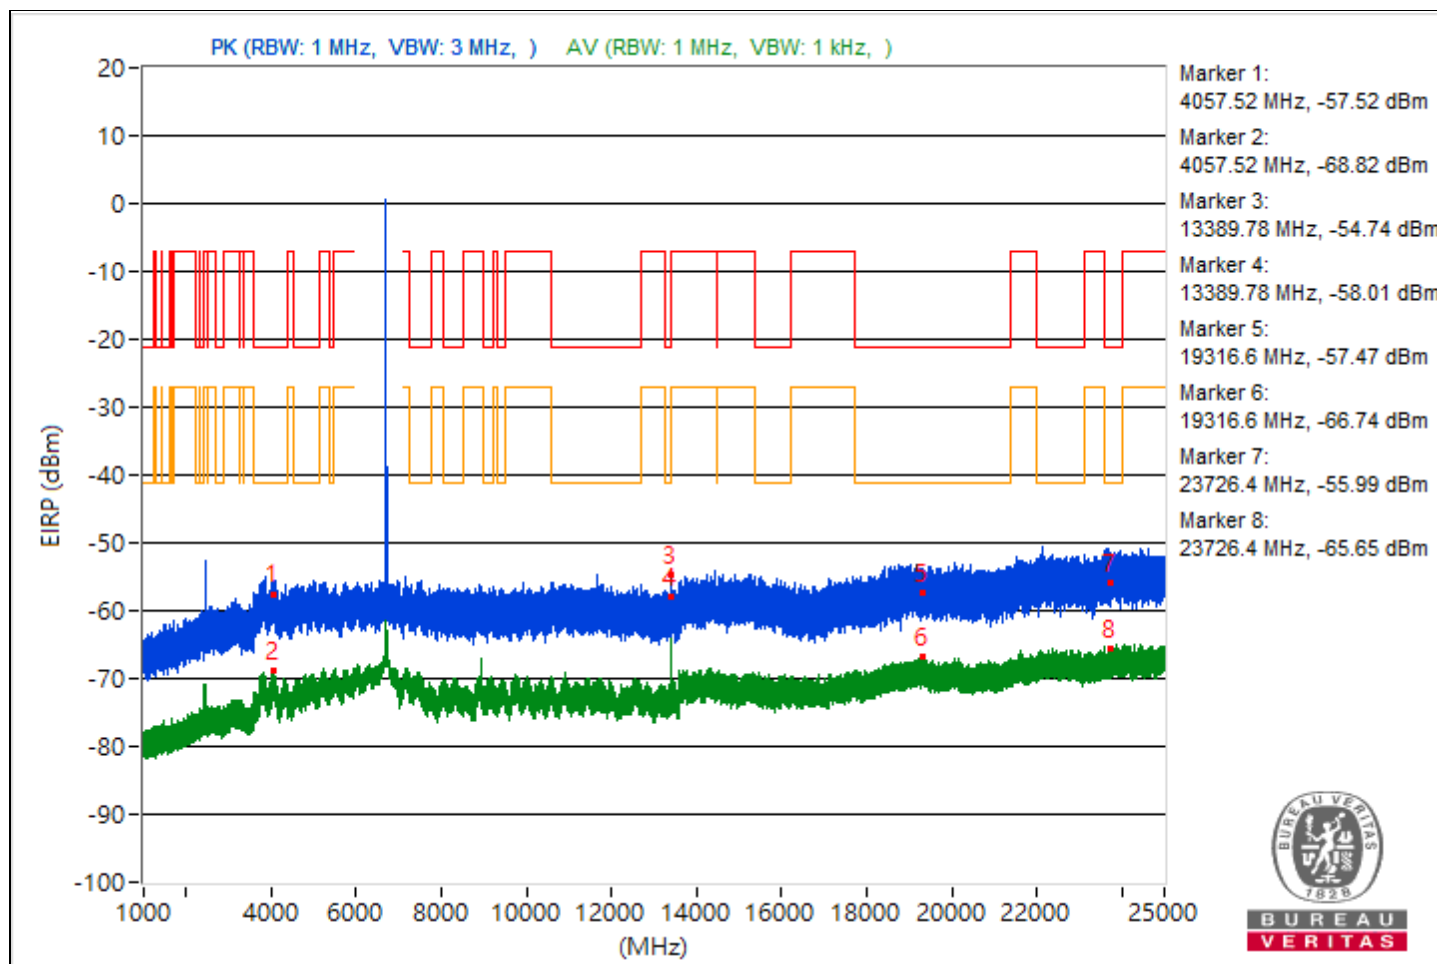


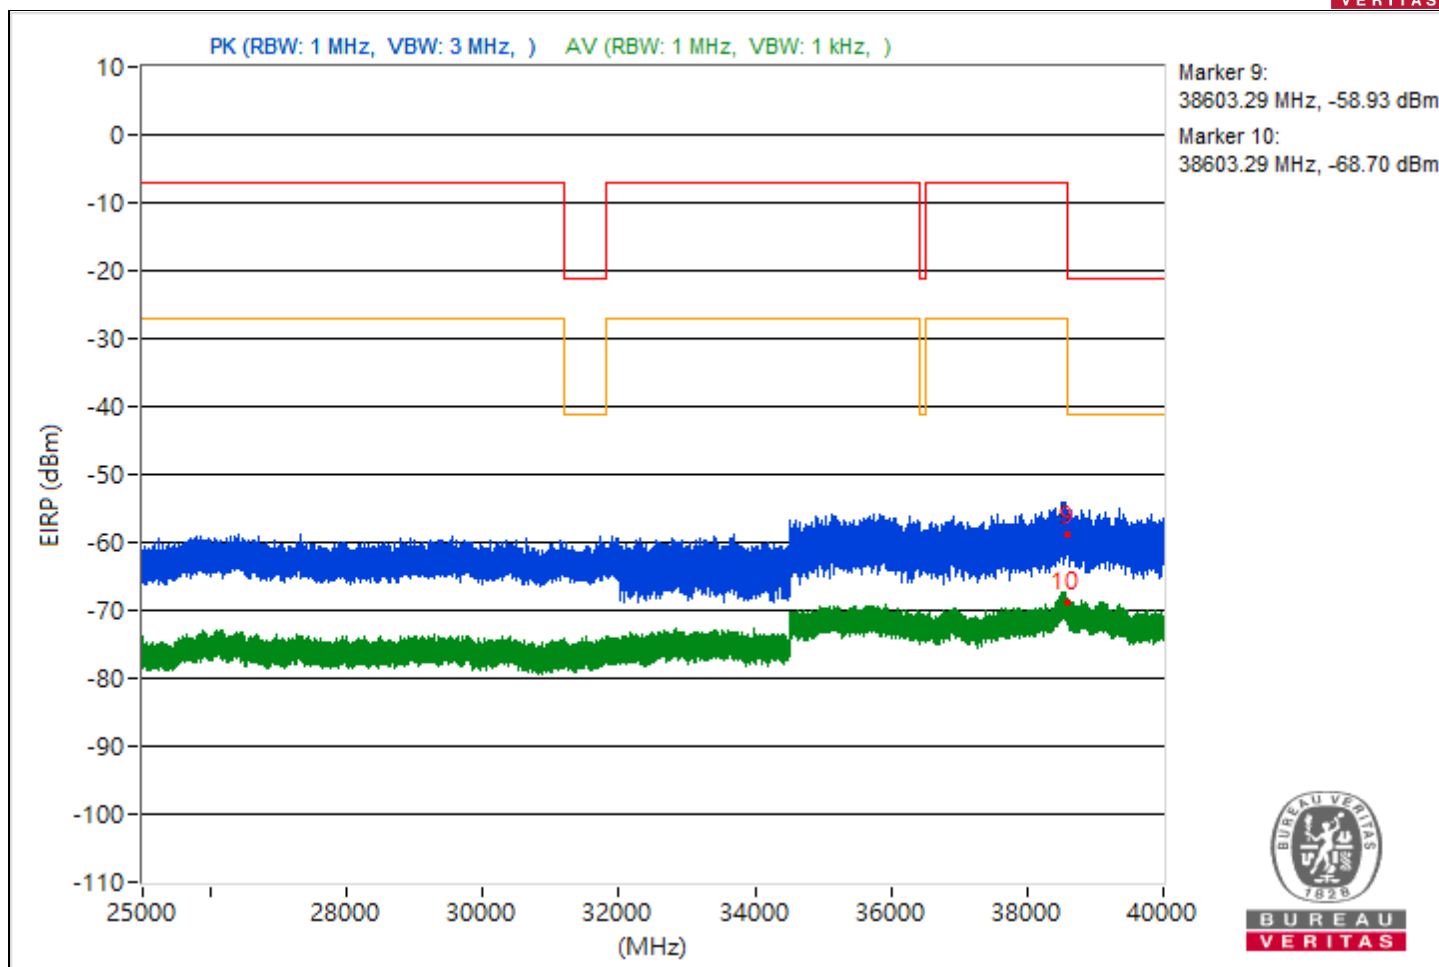


|                          |                              |             |                   |
|--------------------------|------------------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT20) 106-tone RU | Channel     | CH 181 : 6855 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz               | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH                 | Tested By   | JyunChun.Lin      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 4976.93         | 35.97 PK                | 74             | -38.03      | -71.22                  | -69.83                  | 8.17                   | -59.29           |
| 2                            | 4976.93         | 26.83 AV                | 54             | -27.17      | -79.87                  | -79.37                  | 8.17                   | -68.43           |
| 3                            | 8225.96         | 38.33 PK                | 74             | -35.67      | -69.23                  | -67.23                  | 8.17                   | -56.93           |
| 4                            | 8225.96         | 30.64 AV                | 54             | -23.36      | -77.21                  | -74.73                  | 8.17                   | -64.62           |
| 5                            | 19209.2         | 37.64 PK                | 74             | -36.36      | -70.19                  | -67.76                  | 8.17                   | -57.62           |
| 6                            | 19209.2         | 28.22 AV                | 54             | -25.78      | -76.83                  | -80.26                  | 8.17                   | -67.04           |
| 7                            | 23864.2         | 40.12 PK                | 74             | -33.88      | -66.48                  | -66.18                  | 8.17                   | -55.14           |
| 8                            | 23864.2         | 30.4 AV                 | 54             | -23.6       | -77.9                   | -74.74                  | 8.17                   | -64.86           |
| 9                            | 38602.4         | 35.77 PK                | 74             | -38.23      | -69.82                  | -71.73                  | 8.17                   | -59.49           |
| 10                           | 38602.4         | 26.8 AV                 | 54             | -27.2       | -78.73                  | -80.81                  | 8.17                   | -68.46           |

Note: Margin value = Emission Level - Limit value

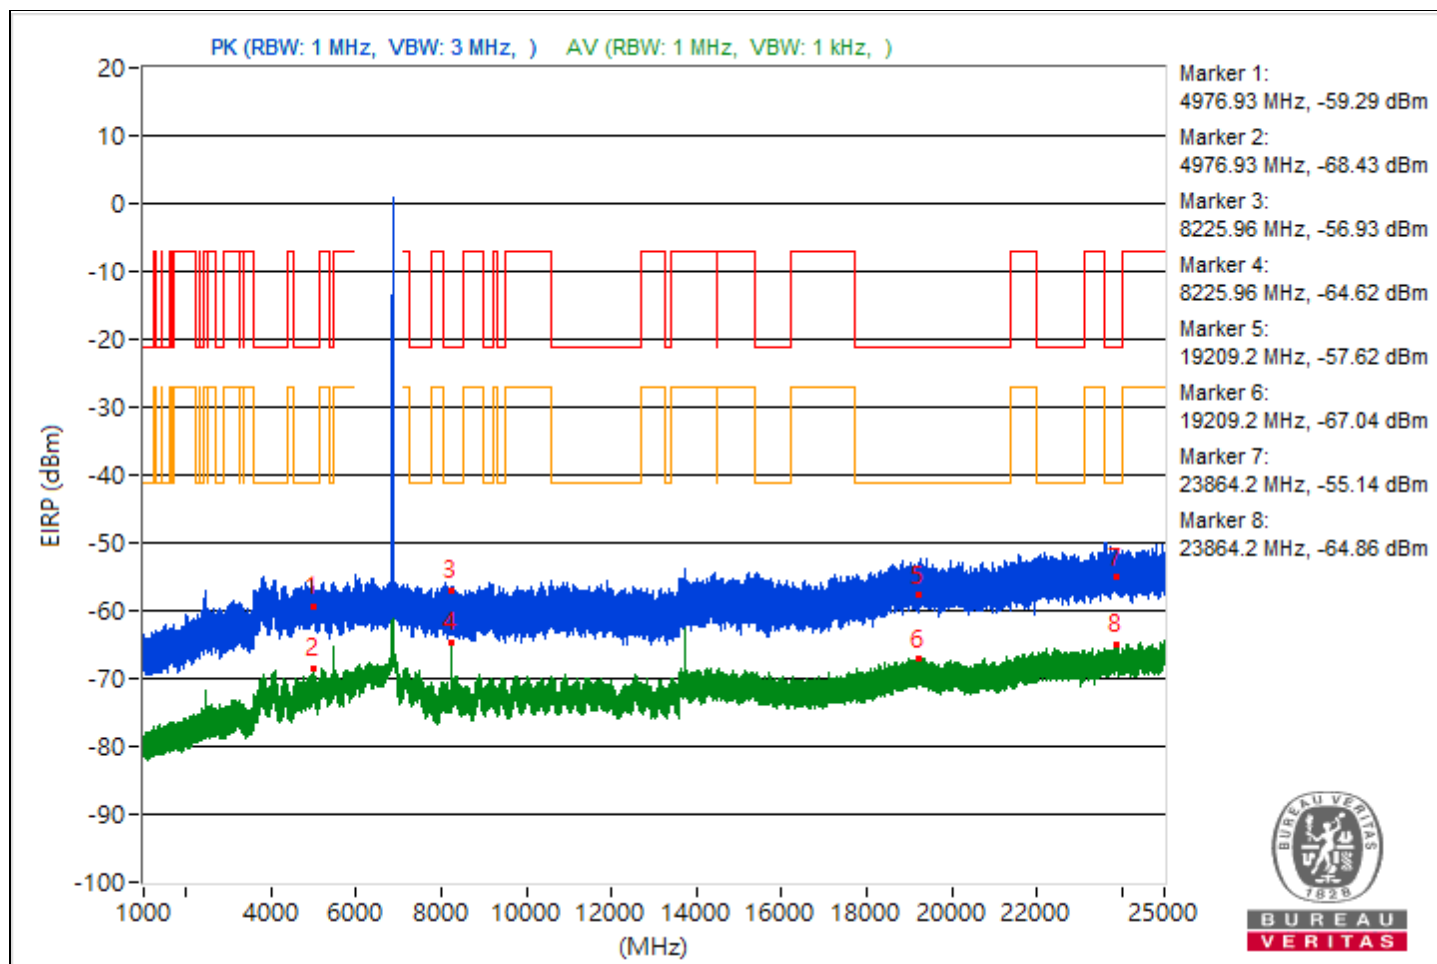

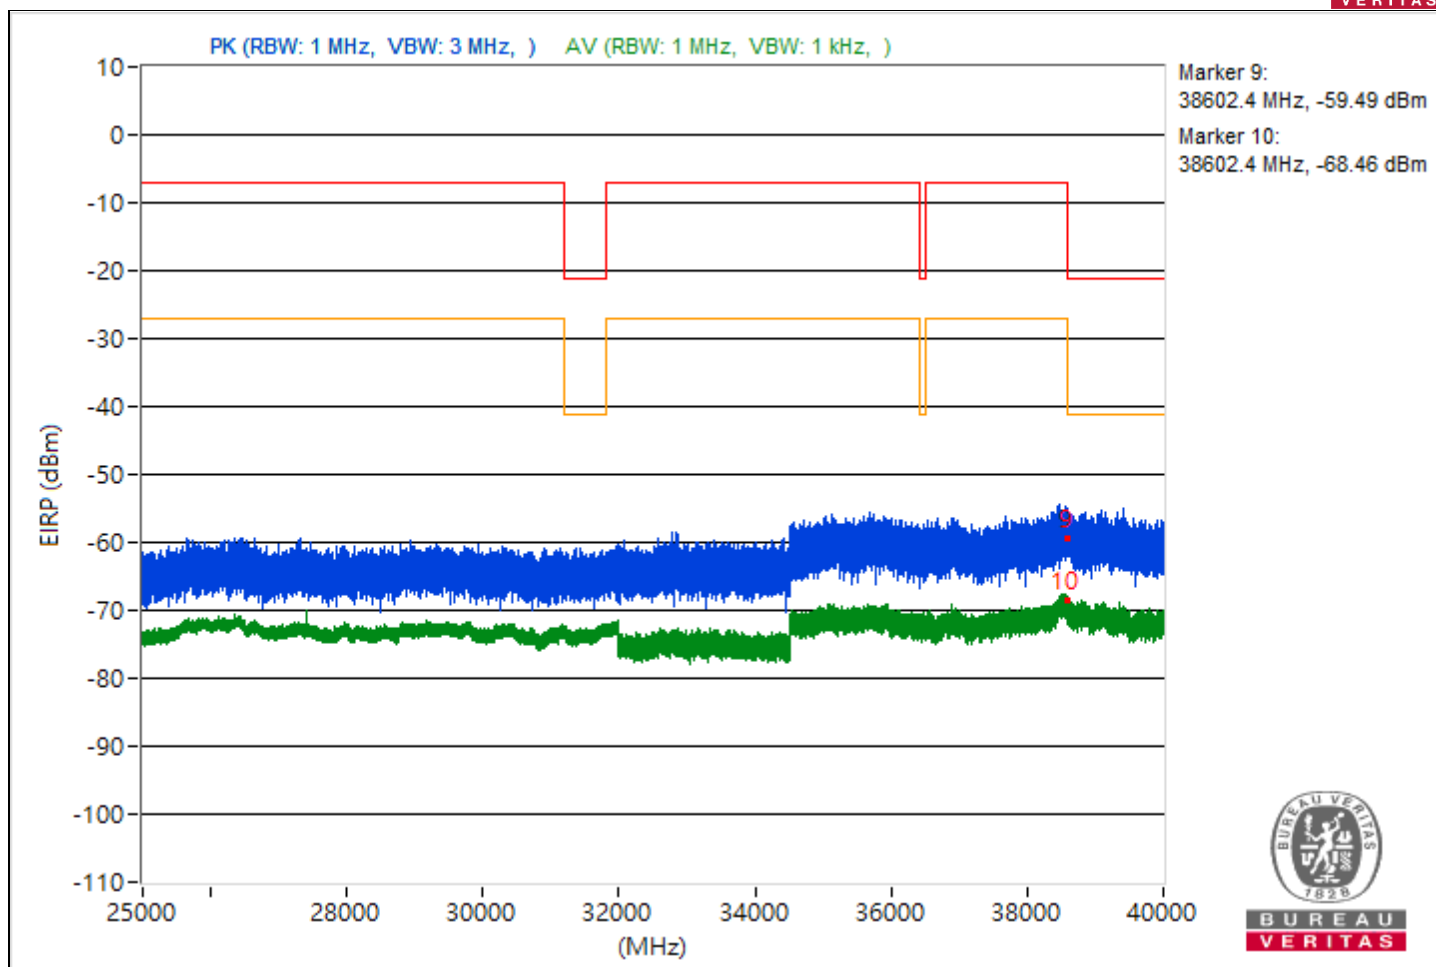





|                          |                                      |             |                 |
|--------------------------|--------------------------------------|-------------|-----------------|
| RF Mode                  | 802.11be (EHT80) Punctured by 20 MHz | Channel     | CH 7 : 5985 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz                       | Input Power | 3.3 Vdc         |
| Environmental Conditions | 24°C, 62% RH                         | Tested By   | JyunChun.LIn    |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5459            | 38.71 PK                | 74             | -35.29      | -67.22                  | -68.31                  | 8.17                   | -56.55           |
| 2                            | 5459            | 29.61 AV                | 54             | -24.39      | -76.19                  | -77.59                  | 8.17                   | -65.65           |
| 3                            | 7250.46         | 37.24 PK                | 74             | -36.76      | -69.11                  | -69.29                  | 8.17                   | -58.02           |
| 4                            | 7250.46         | 26.65 AV                | 54             | -27.35      | -77.88                  | -83.27                  | 8.17                   | -68.61           |
| 5                            | 21377.9         | 39.12 PK                | 74             | -34.88      | -67.46                  | -67.19                  | 8.17                   | -56.14           |
| 6                            | 21377.9         | 27.88 AV                | 54             | -26.12      | -81.31                  | -76.89                  | 8.17                   | -67.38           |
| 7                            | 23839.1         | 38.91 PK                | 74             | -35.09      | -67.34                  | -67.73                  | 8.17                   | -56.35           |
| 8                            | 23839.1         | 29.62 AV                | 54             | -24.38      | -75.32                  | -79.13                  | 8.17                   | -65.64           |
| 9                            | 38601.42        | 37.18 PK                | 74             | -36.82      | -71.57                  | -67.76                  | 8.17                   | -58.08           |
| 10                           | 38601.42        | 26.11 AV                | 54             | -27.89      | -79.36                  | -81.58                  | 8.17                   | -69.15           |

Note: Margin value = Emission Level - Limit value

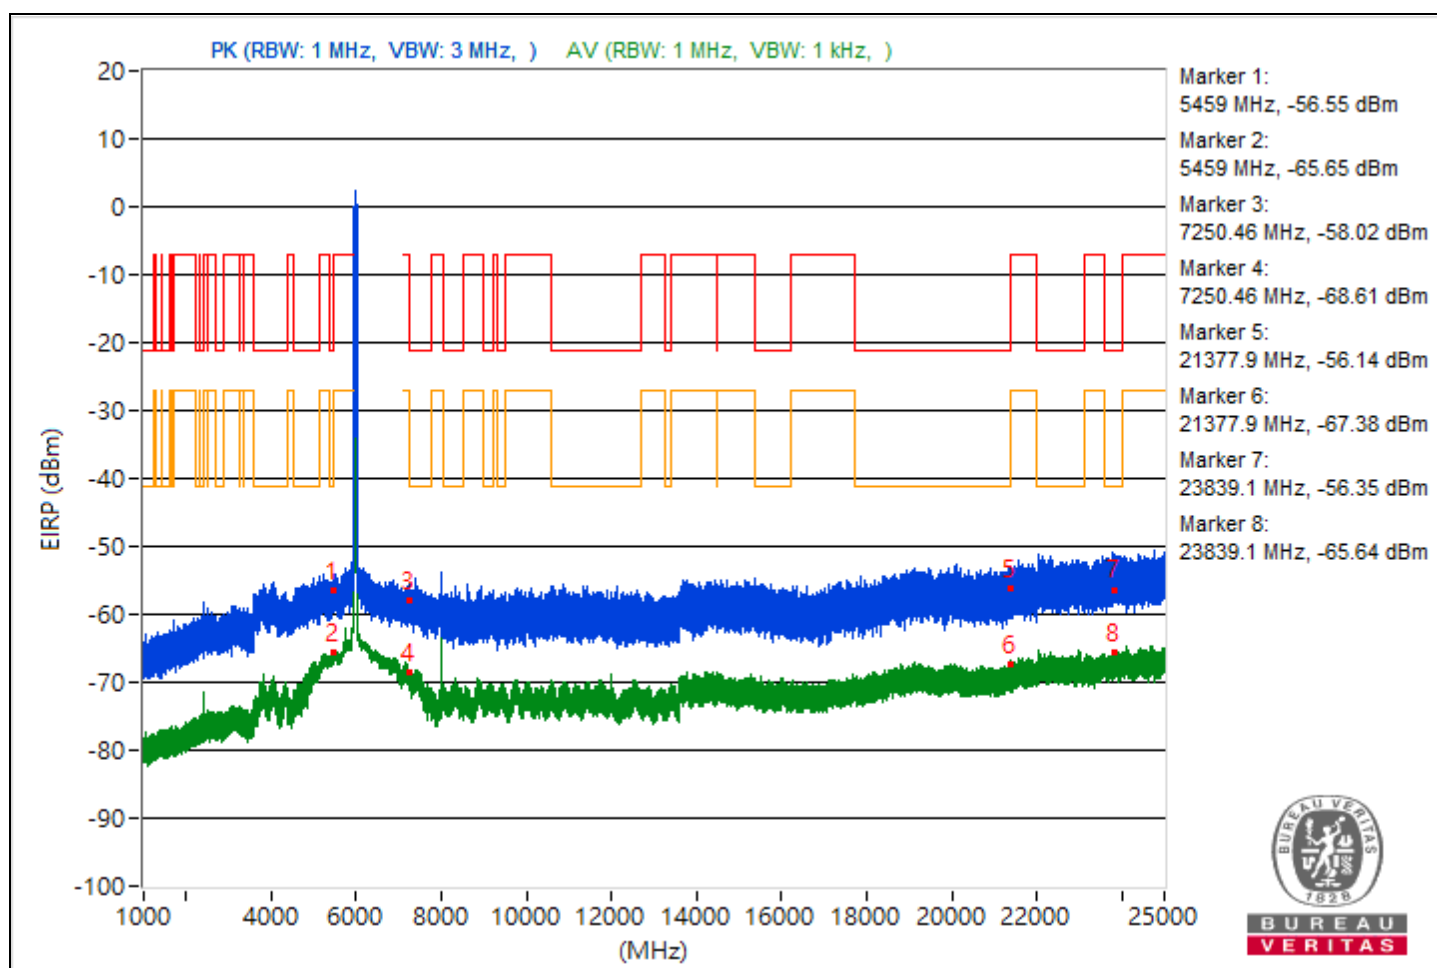


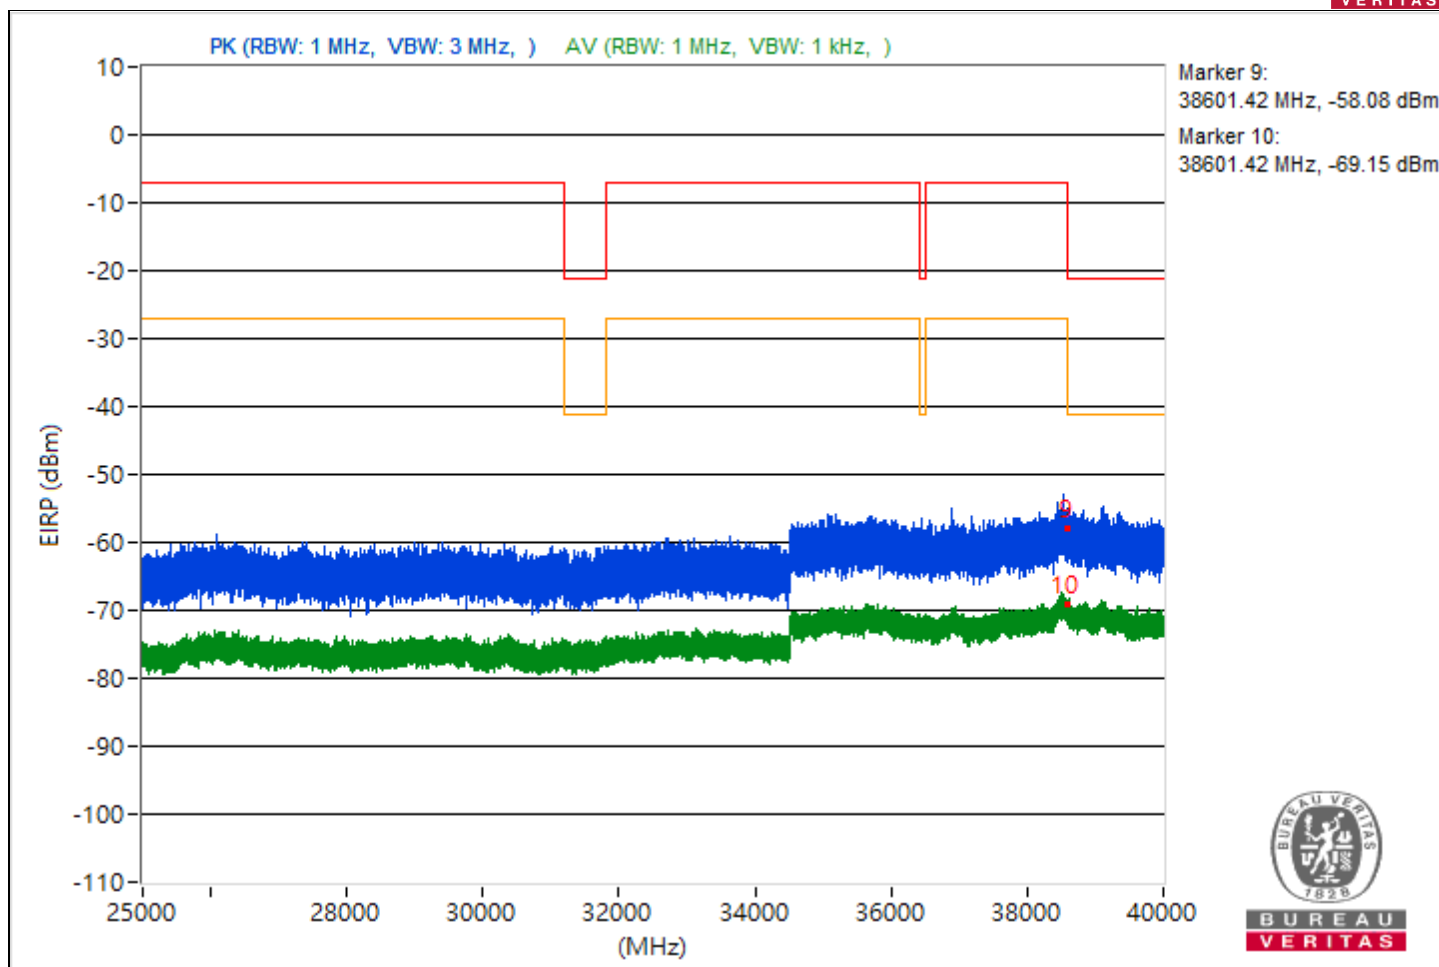


|                          |                                      |             |                   |
|--------------------------|--------------------------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT80) Punctured by 20 MHz | Channel     | CH 135 : 6625 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz                       | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 62% RH                         | Tested By   | JyunChun.LIn      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5457.44         | 37.67 PK                | 74             | -36.33      | -69.21                  | -68.37                  | 8.17                   | -57.59           |
| 2                            | 5457.44         | 27.89 AV                | 54             | -26.11      | -78.14                  | -79.01                  | 8.17                   | -67.37           |
| 3                            | 13250.04        | 41 PK                   | 74             | -33         | -69.59                  | -63.36                  | 8.17                   | -54.26           |
| 4                            | 13250.04        | 36.72 AV                | 54             | -17.28      | -77.92                  | -67.05                  | 8.17                   | -58.54           |
| 5                            | 20085.5         | 37.07 PK                | 74             | -36.93      | -70.43                  | -68.52                  | 8.17                   | -58.19           |
| 6                            | 20085.5         | 27.53 AV                | 54             | -26.47      | -80.94                  | -77.54                  | 8.17                   | -67.73           |
| 7                            | 23885.9         | 41.22 PK                | 74             | -32.78      | -65.61                  | -64.86                  | 8.17                   | -54.04           |
| 8                            | 23885.9         | 30.56 AV                | 54             | -23.44      | -76.88                  | -75.07                  | 8.17                   | -64.7            |
| 9                            | 38603.73        | 36.53 PK                | 74             | -37.47      | -69.26                  | -70.67                  | 8.17                   | -58.73           |
| 10                           | 38603.73        | 26.2 AV                 | 54             | -27.8       | -82.57                  | -78.73                  | 8.17                   | -69.06           |

Note: Margin value = Emission Level - Limit value

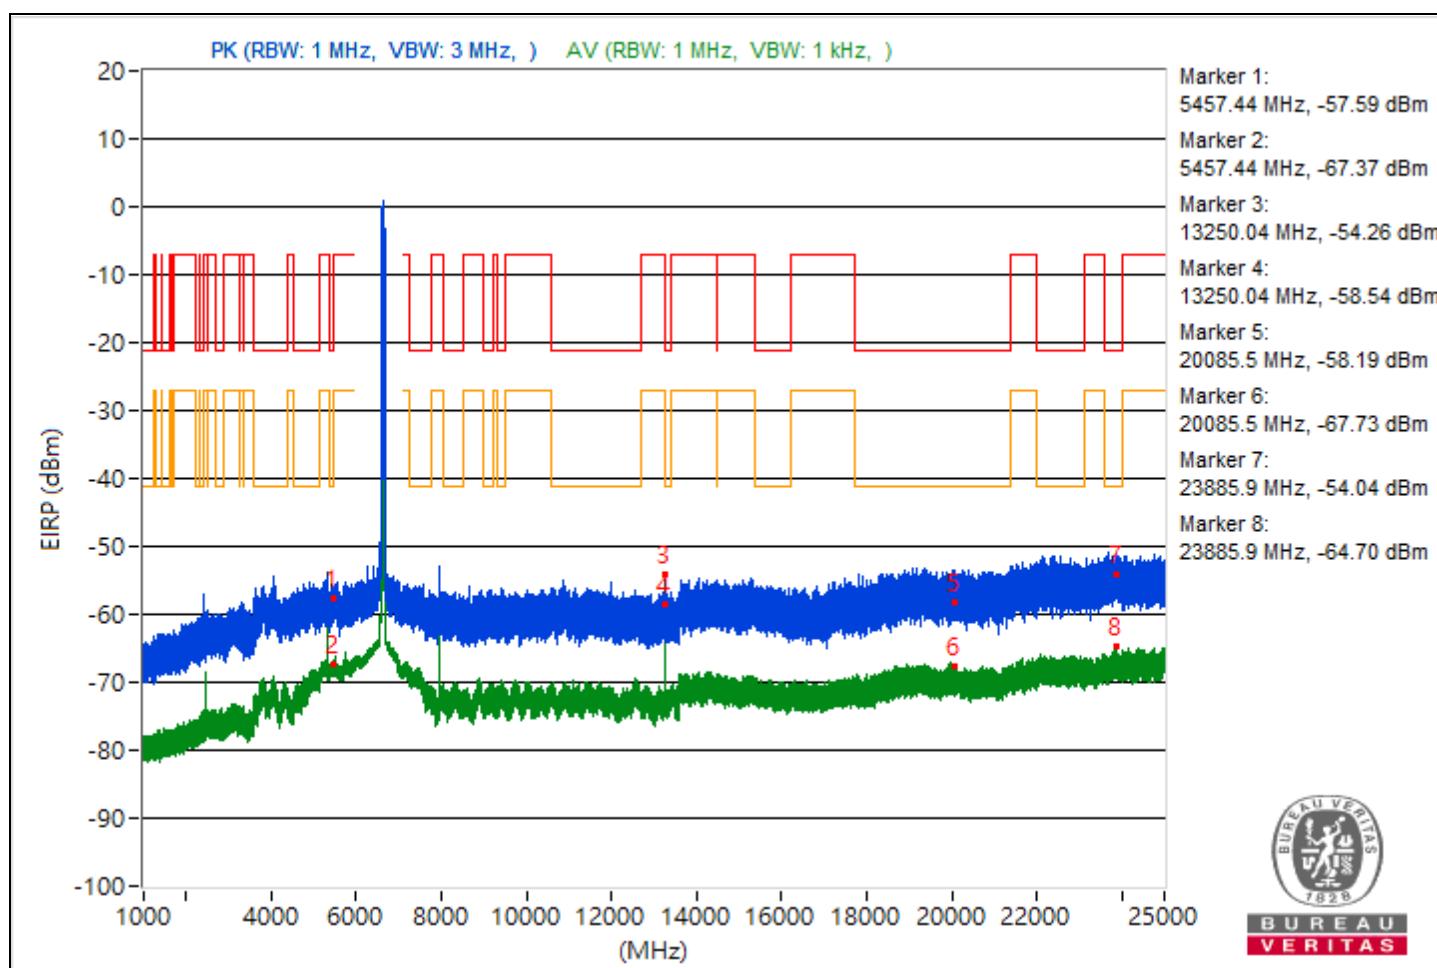


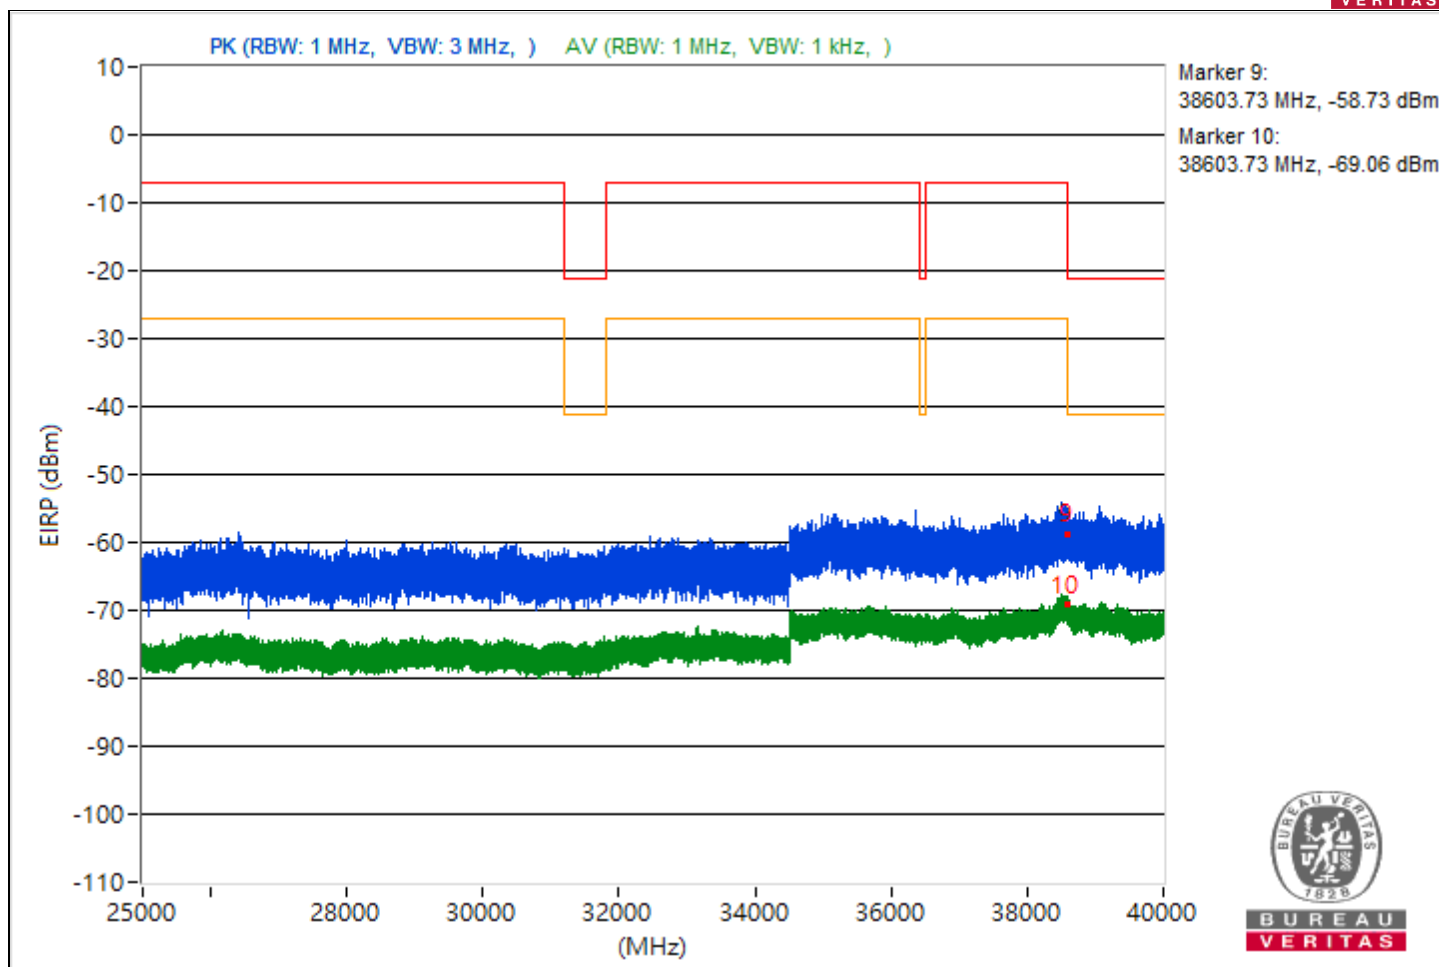


|                          |                                       |             |                  |
|--------------------------|---------------------------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT160) Punctured by 20 MHz | Channel     | CH 15 : 6025 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz                        | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 62% RH                          | Tested By   | JyunChun.LIn     |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5440.02         | 41.94 PK                | 74             | -32.06      | -65.44                  | -63.73                  | 8.17                   | -53.32           |
| 2                            | 5440.02         | 33.14 AV                | 54             | -20.86      | -74.06                  | -72.66                  | 8.17                   | -62.12           |
| 3                            | 8033.24         | 42.11 PK                | 74             | -31.89      | -62.64                  | -67.14                  | 8.17                   | -53.15           |
| 4                            | 8033.24         | 37.53 AV                | 54             | -16.47      | -66.76                  | -73.35                  | 8.17                   | -57.73           |
| 5                            | 19371.5         | 38.64 PK                | 74             | -35.36      | -66.48                  | -69.71                  | 8.17                   | -56.62           |
| 6                            | 19371.5         | 27.86 AV                | 54             | -26.14      | -80.67                  | -77.17                  | 8.17                   | -67.4            |
| 7                            | 23835.7         | 40.72 PK                | 74             | -33.28      | -64.49                  | -67.45                  | 8.17                   | -54.54           |
| 8                            | 23835.7         | 29.79 AV                | 54             | -24.21      | -78.61                  | -75.31                  | 8.17                   | -65.47           |
| 9                            | 38612.53        | 36.97 PK                | 74             | -37.03      | -68.34                  | -70.98                  | 8.17                   | -58.29           |
| 10                           | 38612.53        | 26.25 AV                | 54             | -27.75      | -78.76                  | -82.35                  | 8.17                   | -69.01           |

Note: Margin value = Emission Level - Limit value

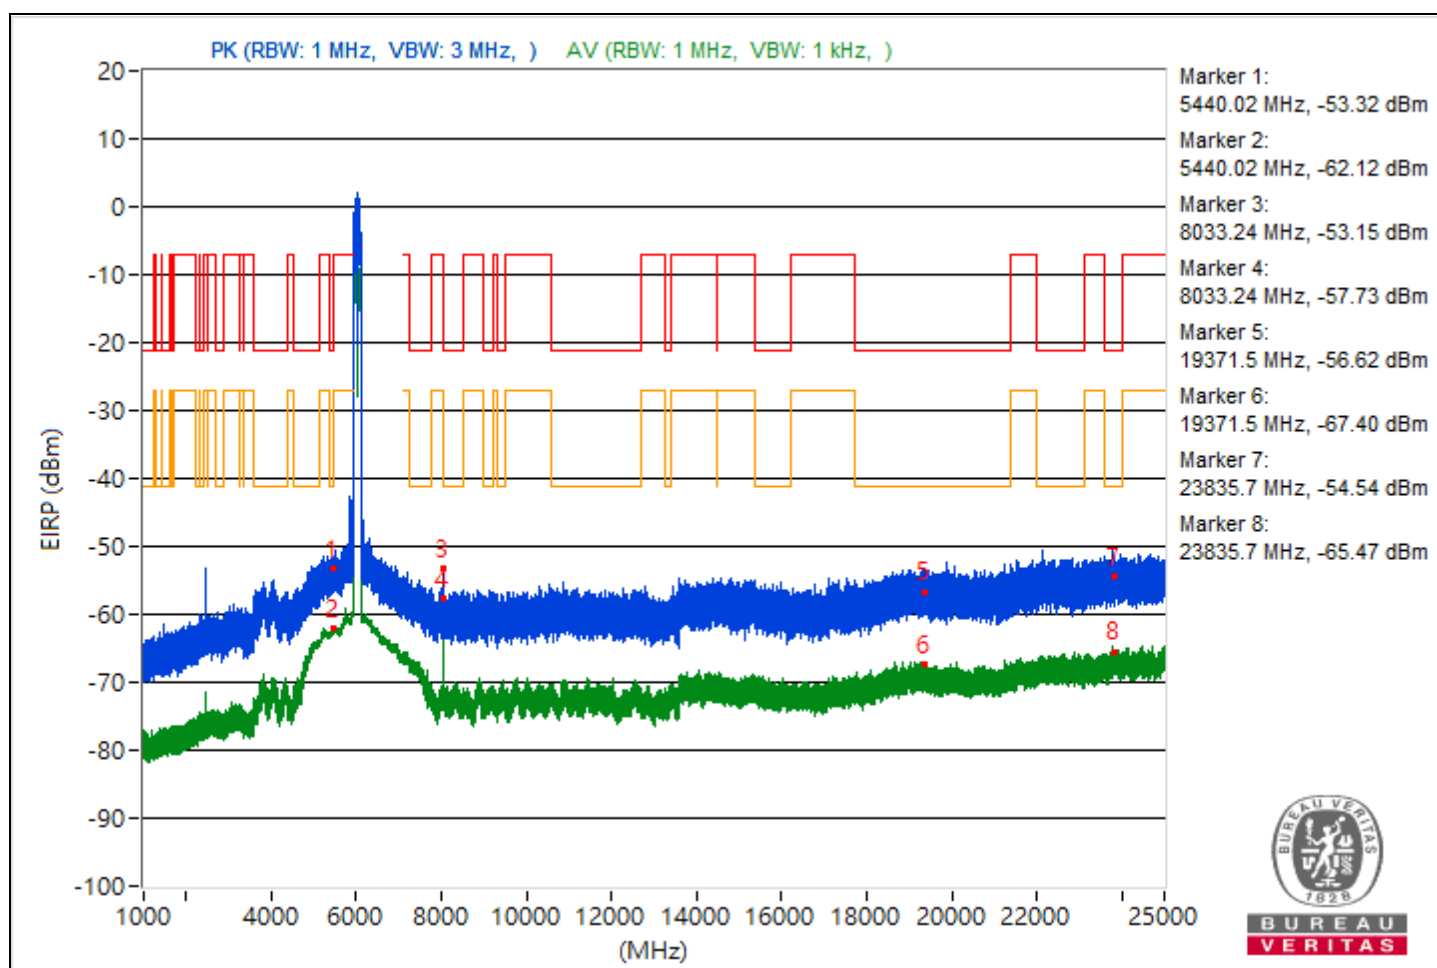


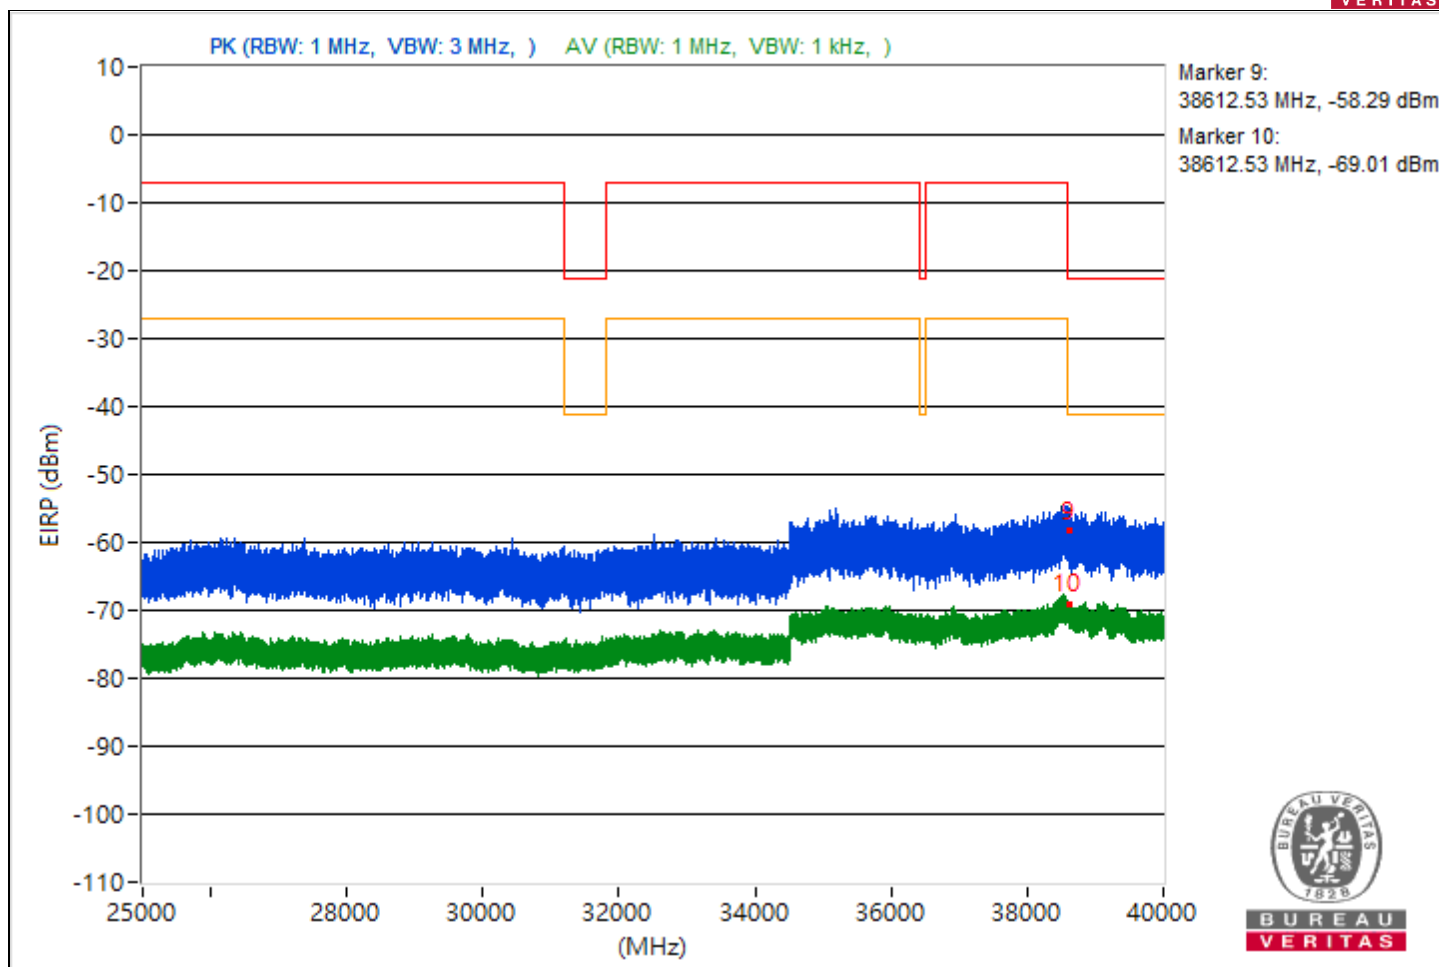


|                          |                                       |             |                   |
|--------------------------|---------------------------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT160) Punctured by 20 MHz | Channel     | CH 143 : 6665 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz                        | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 62% RH                          | Tested By   | JyunChun.LIn      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5440.02         | 40.04 PK                | 74             | -33.96      | -68.98                  | -64.8                   | 8.17                   | -55.22           |
| 2                            | 5440.02         | 32.75 AV                | 54             | -21.25      | -75.14                  | -72.6                   | 8.17                   | -62.51           |
| 3                            | 13329.87        | 39.88 PK                | 74             | -34.12      | -70.32                  | -64.58                  | 8.17                   | -55.38           |
| 4                            | 13329.87        | 37.33 AV                | 54             | -16.67      | -76.05                  | -66.56                  | 8.17                   | -57.93           |
| 5                            | 21329.7         | 36.94 PK                | 74             | -37.06      | -68.86                  | -70.23                  | 8.17                   | -58.32           |
| 6                            | 21329.7         | 28.15 AV                | 54             | -25.85      | -77.42                  | -79.38                  | 8.17                   | -67.11           |
| 7                            | 23805.9         | 38.79 PK                | 74             | -35.21      | -68.35                  | -67.06                  | 8.17                   | -56.47           |
| 8                            | 23805.9         | 29.44 AV                | 54             | -24.56      | -75.48                  | -79.36                  | 8.17                   | -65.82           |
| 9                            | 38610.49        | 37.56 PK                | 74             | -36.44      | -67.73                  | -70.47                  | 8.17                   | -57.7            |
| 10                           | 38610.49        | 27.26 AV                | 54             | -26.74      | -78.96                  | -79.41                  | 8.17                   | -68              |

Note: Margin value = Emission Level - Limit value

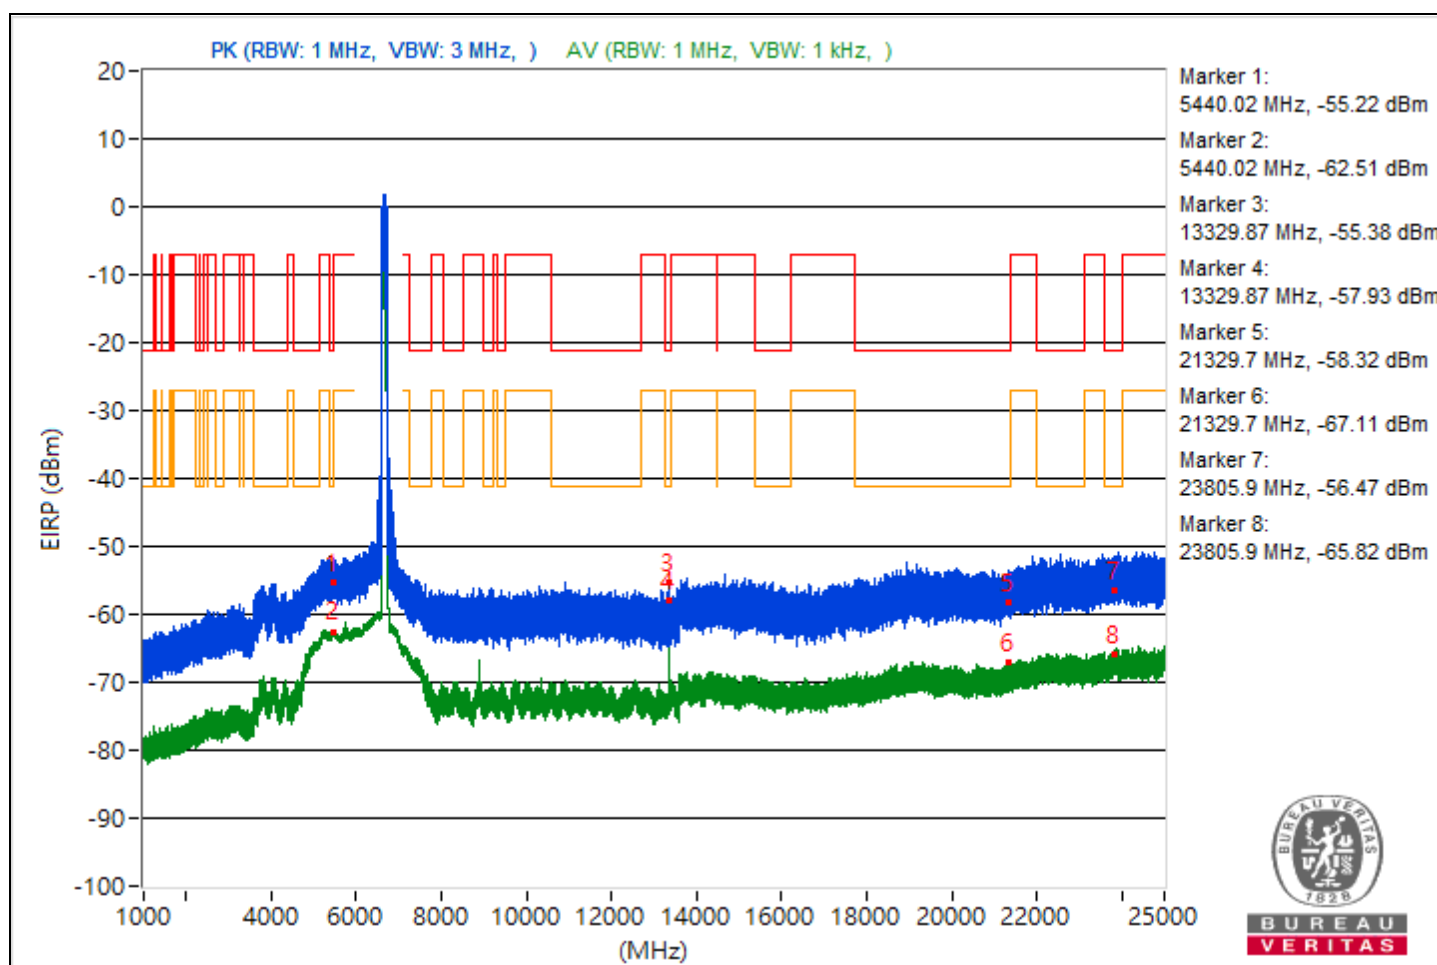

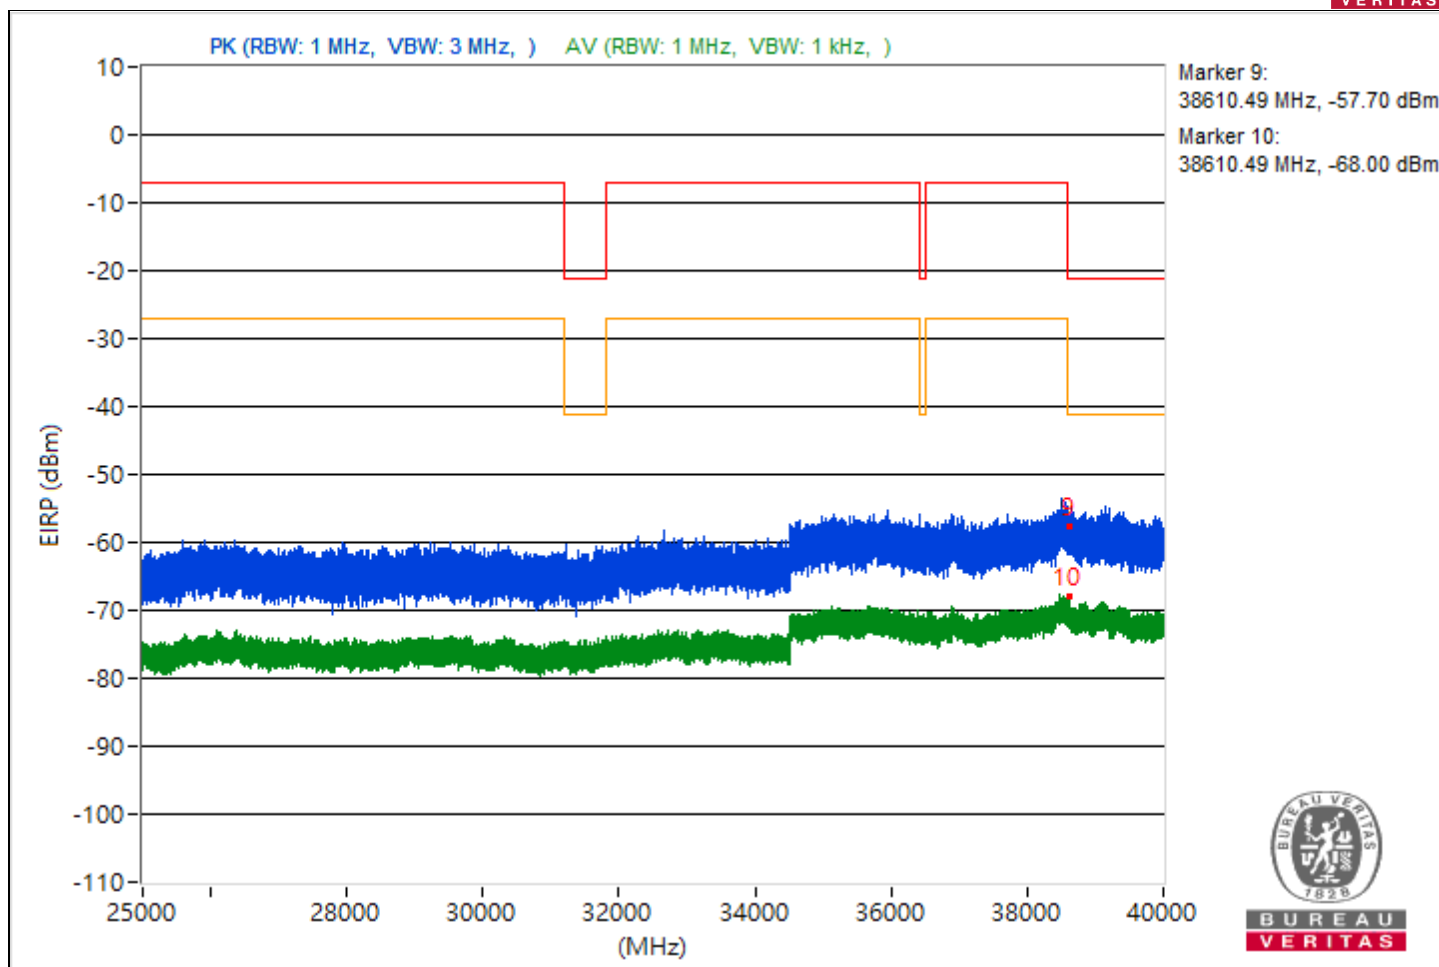





|                          |                                       |             |                  |
|--------------------------|---------------------------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT160) Punctured by 40 MHz | Channel     | CH 15 : 6025 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz                        | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 62% RH                          | Tested By   | JyunChun.LIn     |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| 1   | 5425.79         | 39.96 PK                | 74             | -34.04      | -66.03                  | -66.99                  | 8.17                   | -55.3            |
| 2   | 5425.79         | 32.93 AV                | 54             | -21.07      | -74.2                   | -72.92                  | 8.17                   | -62.33           |
| 3   | 8033.16         | 40.55 PK                | 74             | -33.45      | -64.77                  | -67.39                  | 8.17                   | -54.71           |
| 4   | 8033.16         | 37.51 AV                | 54             | -16.49      | -66.81                  | -73.25                  | 8.17                   | -57.75           |
| 5   | 21386           | 37.33 PK                | 74             | -36.67      | -72.02                  | -67.39                  | 8.17                   | -57.93           |
| 6   | 21386           | 27.91 AV                | 54             | -26.09      | -77.38                  | -80.09                  | 8.17                   | -67.35           |
| 7   | 23877.8         | 41.82 PK                | 74             | -32.18      | -63.85                  | -65.56                  | 8.17                   | -53.44           |
| 8   | 23877.8         | 30.09 AV                | 54             | -23.91      | -77.5                   | -75.44                  | 8.17                   | -65.17           |
| 9   | 38606.76        | 33.88 PK                | 74             | -40.12      | -73.2                   | -72                     | 8.17                   | -61.38           |
| 10  | 38606.76        | 26.64 AV                | 54             | -27.36      | -78.81                  | -81.09                  | 8.17                   | -68.62           |

Note: Margin value = Emission Level - Limit value

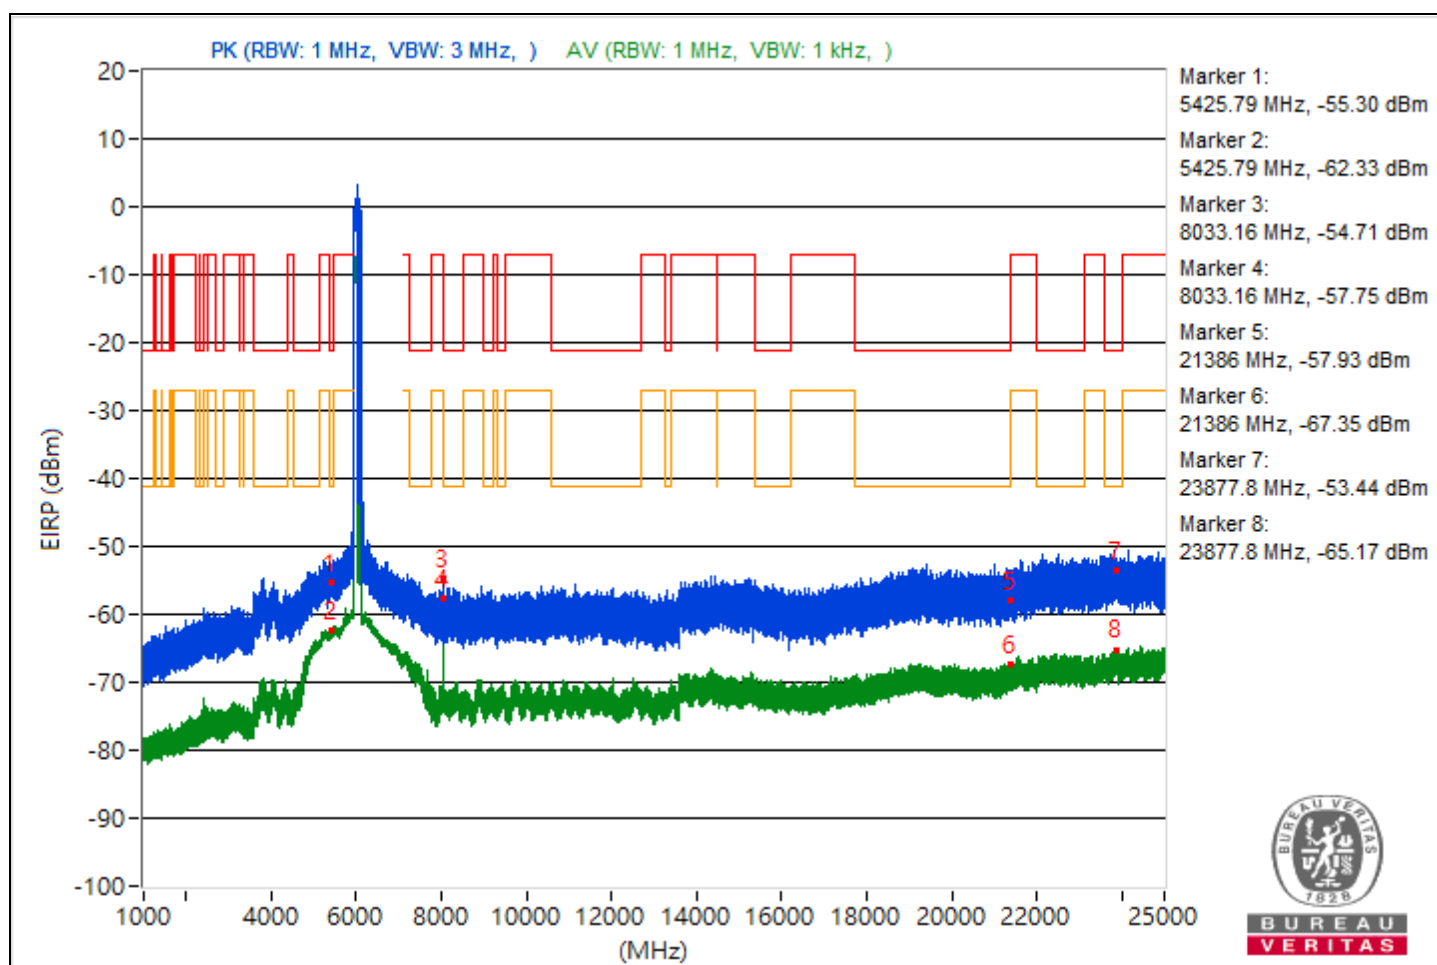


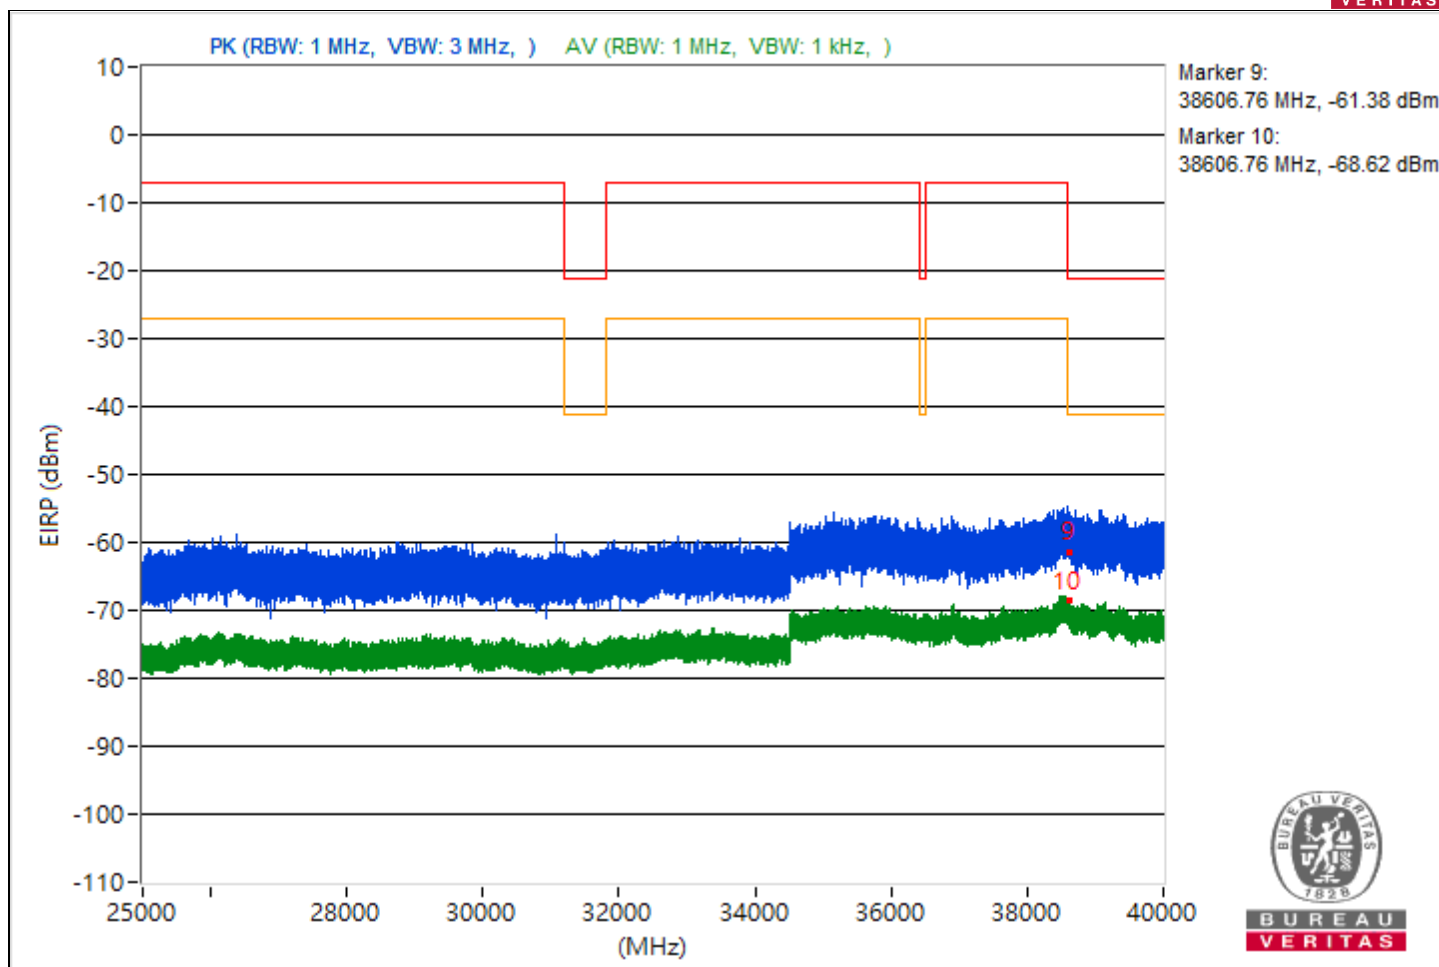


|                          |                                       |             |                   |
|--------------------------|---------------------------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT160) Punctured by 40 MHz | Channel     | CH 143 : 6665 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz                        | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 62% RH                          | Tested By   | JyunChun.LIn      |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5439.87         | 40.1 PK                 | 74             | -33.9       | -65.88                  | -66.84                  | 8.17                   | -55.16           |
| 2                            | 5439.87         | 32.79 AV                | 54             | -21.21      | -74.99                  | -72.63                  | 8.17                   | -62.47           |
| 3                            | 13329.78        | 39.78 PK                | 74             | -34.22      | -73.25                  | -64.15                  | 8.17                   | -55.48           |
| 4                            | 13329.78        | 37.38 AV                | 54             | -16.62      | -76.65                  | -66.44                  | 8.17                   | -57.88           |
| 5                            | 19438.8         | 37.94 PK                | 74             | -36.06      | -67.18                  | -70.4                   | 8.17                   | -57.32           |
| 6                            | 19438.8         | 27.71 AV                | 54             | -26.29      | -81.33                  | -77.12                  | 8.17                   | -67.55           |
| 7                            | 23887           | 39.71 PK                | 74             | -34.29      | -67.8                   | -65.88                  | 8.17                   | -55.55           |
| 8                            | 23887           | 30.26 AV                | 54             | -23.74      | -75.39                  | -77.16                  | 8.17                   | -65              |
| 9                            | 38608.98        | 36.44 PK                | 74             | -37.56      | -68.33                  | -72.74                  | 8.17                   | -58.82           |
| 10                           | 38608.98        | 27.03 AV                | 54             | -26.97      | -80.66                  | -78.45                  | 8.17                   | -68.23           |

Note: Margin value = Emission Level - Limit value

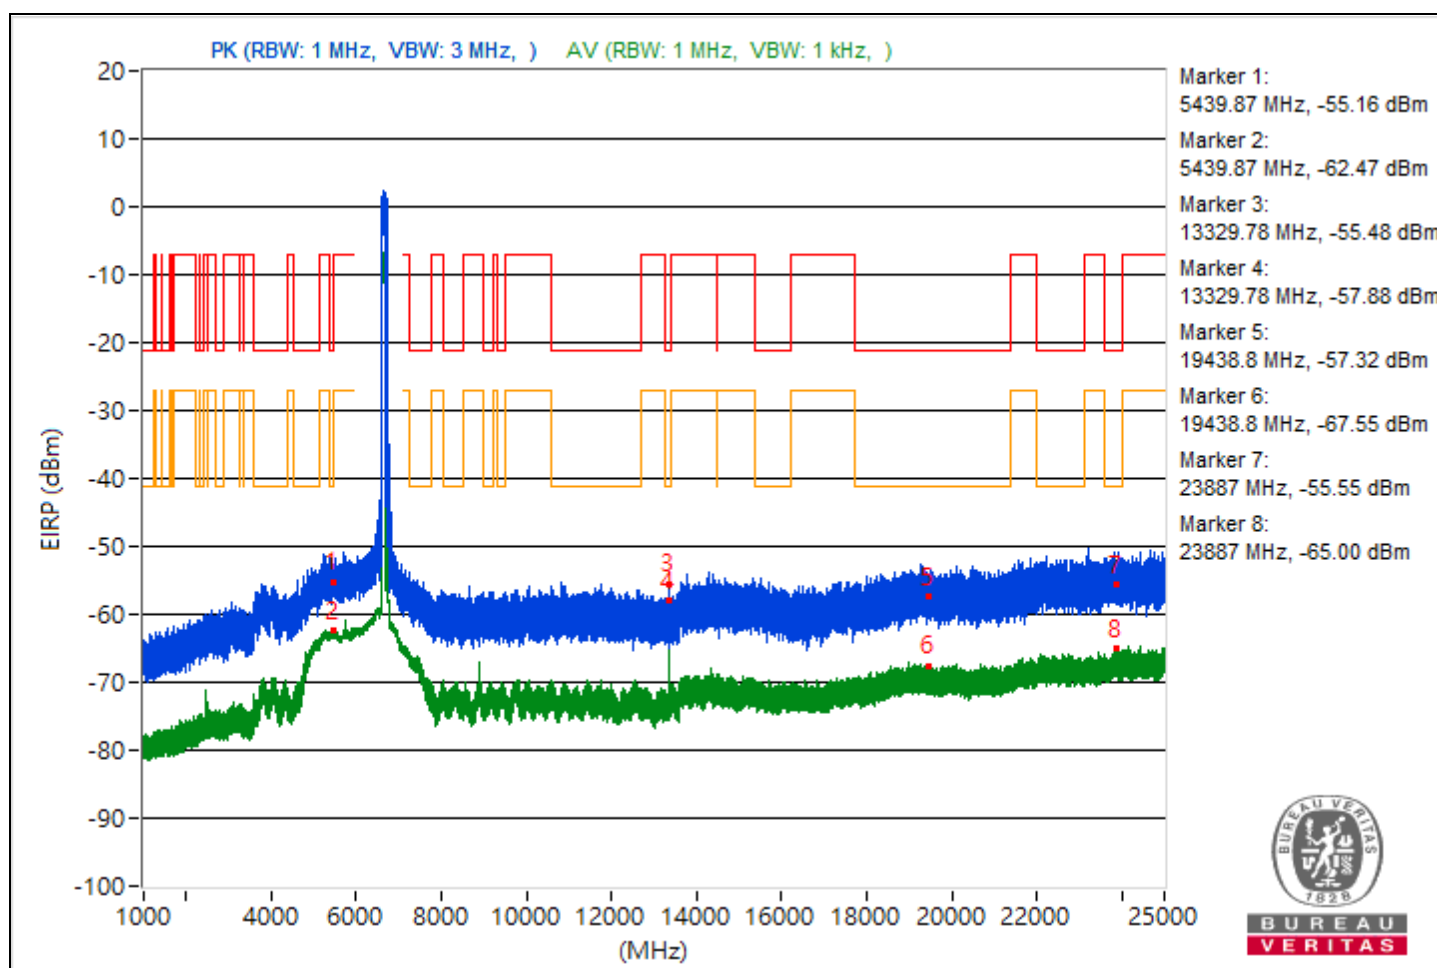

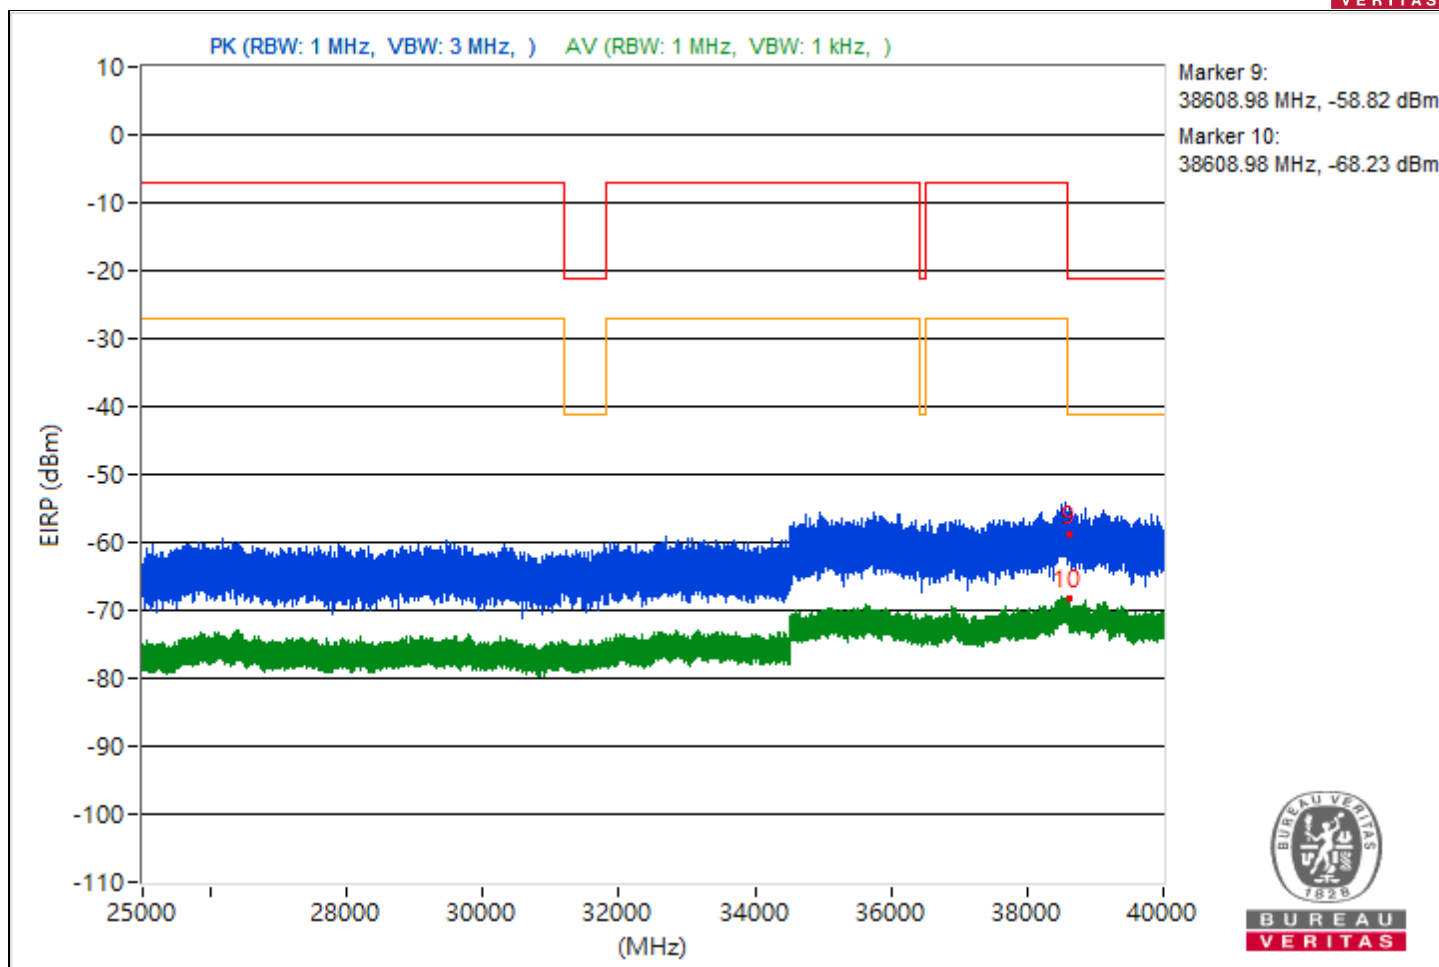



|                          |                                       |             |                  |
|--------------------------|---------------------------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT320) Punctured by 40 MHz | Channel     | CH 63 : 6265 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz                        | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 62% RH                          | Tested By   | JyunChun.LIn     |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| 1   | 5443.29         | 44.47 PK                | 74             | -29.53      | -64.15                  | -60.53                  | 8.17                   | -50.79           |
| 2   | 5443.29         | 35.81 AV                | 54             | -18.19      | -74.59                  | -68.59                  | 8.17                   | -59.45           |
| 3   | 8353.16         | 39.49 PK                | 74             | -34.51      | -65.51                  | -69.14                  | 8.17                   | -55.77           |
| 4   | 8353.16         | 30.1 AV                 | 54             | -23.9       | -75.17                  | -77.93                  | 8.17                   | -65.16           |
| 5   | 19375.3         | 38.55 PK                | 74             | -35.45      | -67.79                  | -68                     | 8.17                   | -56.71           |
| 6   | 19375.3         | 27.75 AV                | 54             | -26.25      | -77.18                  | -81.01                  | 8.17                   | -67.51           |
| 7   | 23906.3         | 41.55 PK                | 74             | -32.45      | -67.49                  | -63.28                  | 8.17                   | -53.71           |
| 8   | 23906.3         | 29.99 AV                | 54             | -24.01      | -78.11                  | -75.25                  | 8.17                   | -65.27           |
| 9   | 38620.09        | 36.57 PK                | 74             | -37.43      | -69.4                   | -70.4                   | 8.17                   | -58.69           |
| 10  | 38620.09        | 26.55 AV                | 54             | -27.45      | -81.15                  | -78.92                  | 8.17                   | -68.71           |

Note: Margin value = Emission Level - Limit value

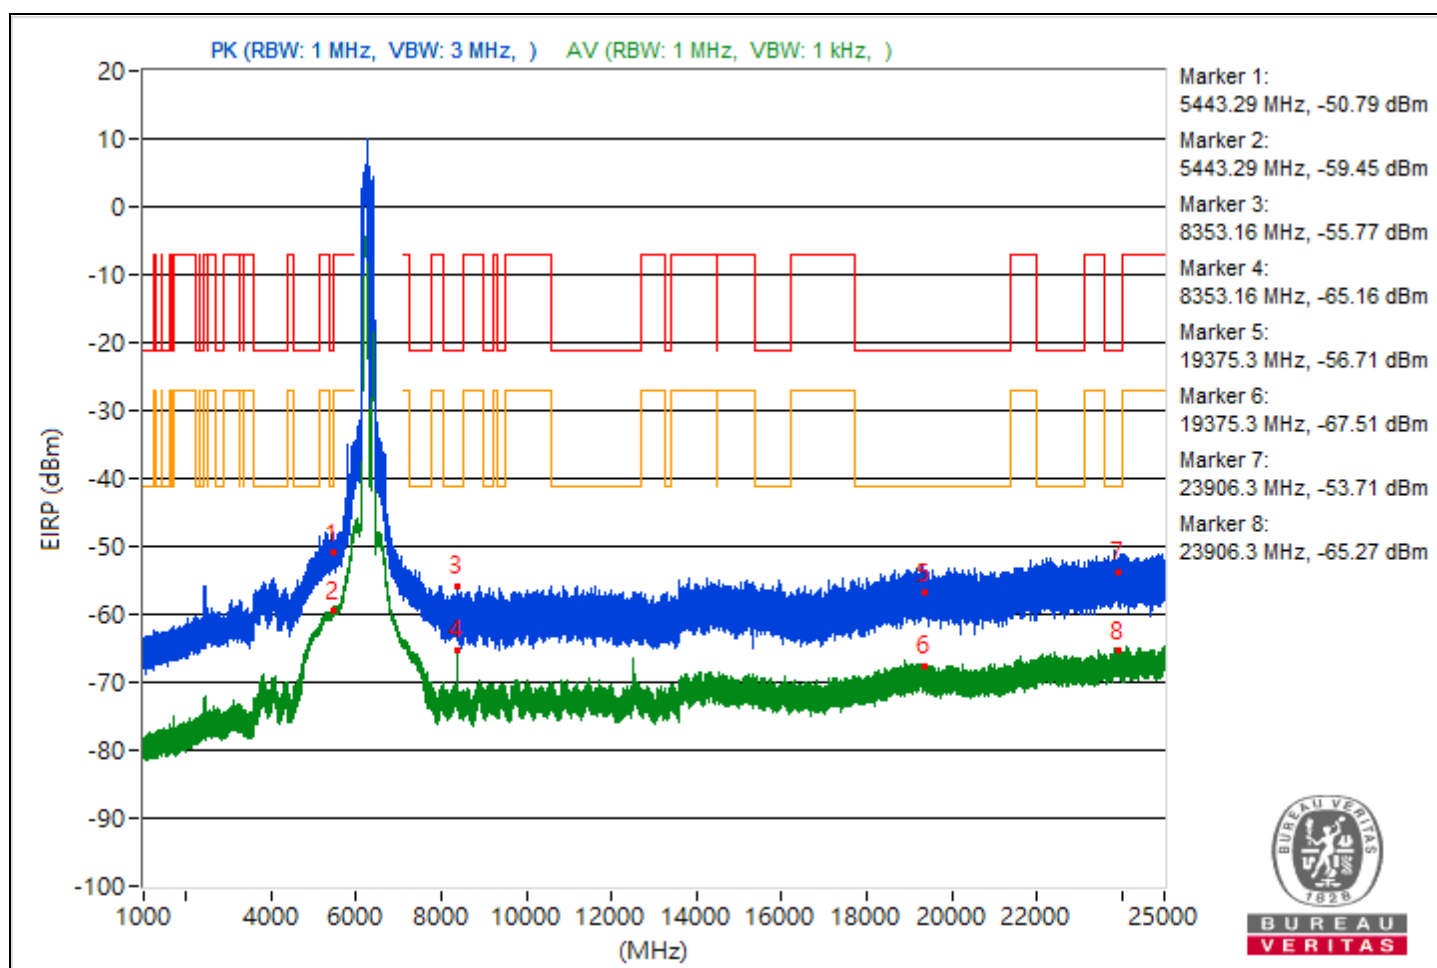


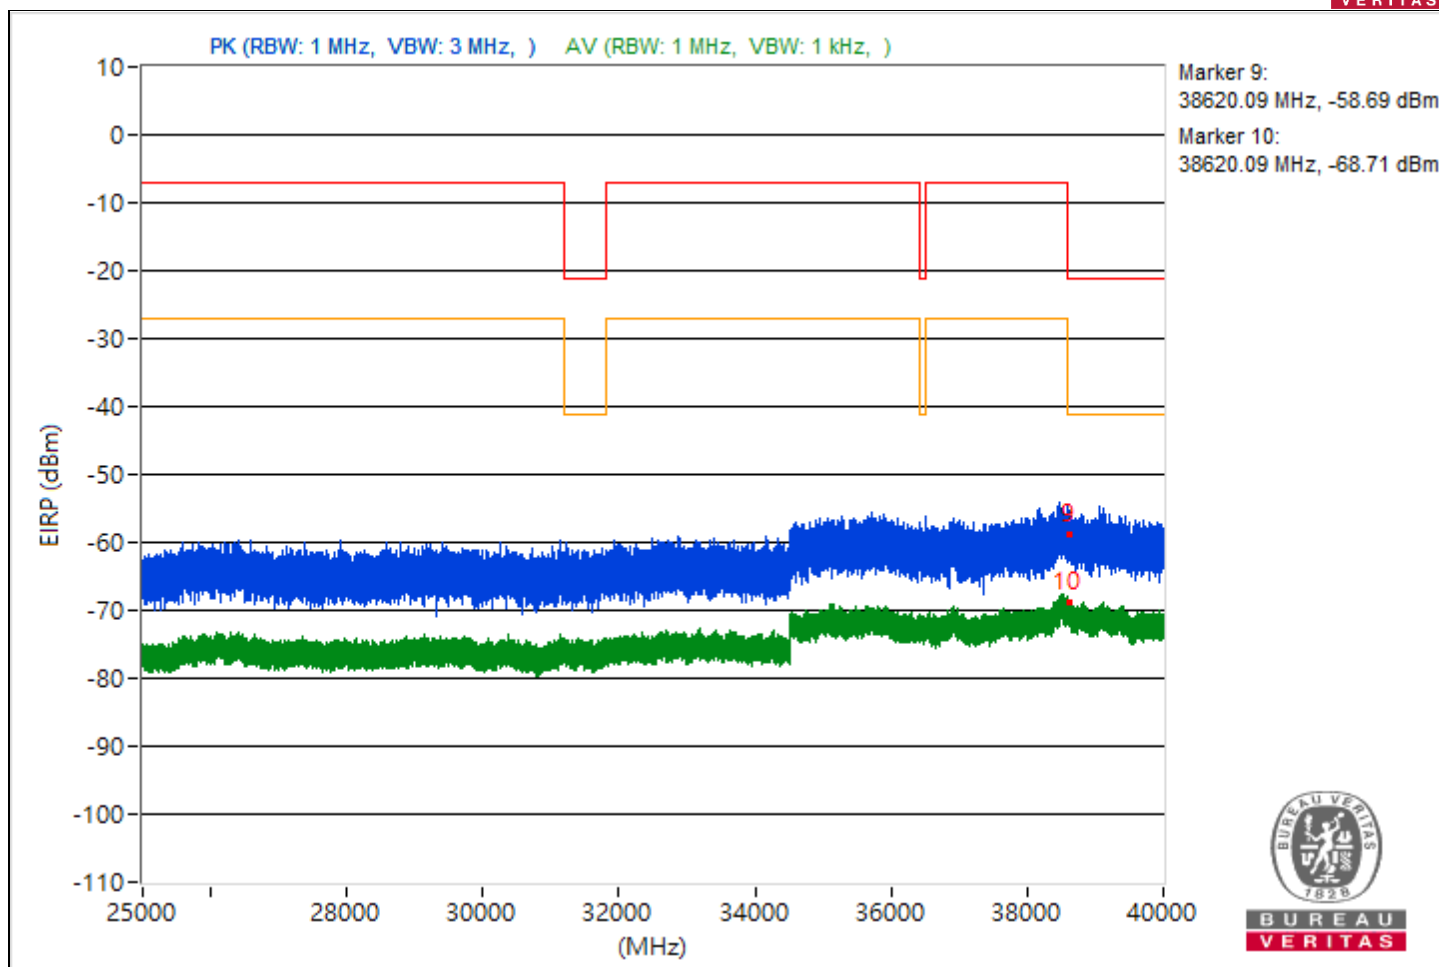


|                          |                                       |             |                  |
|--------------------------|---------------------------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT320) Punctured by 80 MHz | Channel     | CH 63 : 6265 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz                        | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 62% RH                          | Tested By   | JyunChun.LIn     |

| Conducted Unwanted Emissions |                 |                         |                |             |                         |                         |                        |                  |
|------------------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                          | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                            | 5456.43         | 41.59 PK                | 74             | -32.41      | -65.87                  | -64.02                  | 8.17                   | -53.67           |
| 2                            | 5456.43         | 32.93 AV                | 54             | -21.07      | -74.07                  | -73.02                  | 8.17                   | -62.33           |
| 3                            | 8353.16         | 37.53 PK                | 74             | -36.47      | -68.21                  | -69.74                  | 8.17                   | -57.73           |
| 4                            | 8353.16         | 30.53 AV                | 54             | -23.47      | -74.85                  | -77.33                  | 8.17                   | -64.73           |
| 5                            | 19219.6         | 40.96 PK                | 74             | -33.04      | -65.32                  | -65.64                  | 8.17                   | -54.3            |
| 6                            | 19219.6         | 27.87 AV                | 54             | -26.13      | -77.52                  | -79.96                  | 8.17                   | -67.39           |
| 7                            | 23861.8         | 40.4 PK                 | 74             | -33.6       | -67.51                  | -64.94                  | 8.17                   | -54.86           |
| 8                            | 23861.8         | 30.45 AV                | 54             | -23.55      | -74.6                   | -78.07                  | 8.17                   | -64.81           |
| 9                            | 38613.96        | 34.69 PK                | 74             | -39.31      | -73.21                  | -70.66                  | 8.17                   | -60.57           |
| 10                           | 38613.96        | 26.26 AV                | 54             | -27.74      | -78.96                  | -81.86                  | 8.17                   | -69              |

Note: Margin value = Emission Level - Limit value

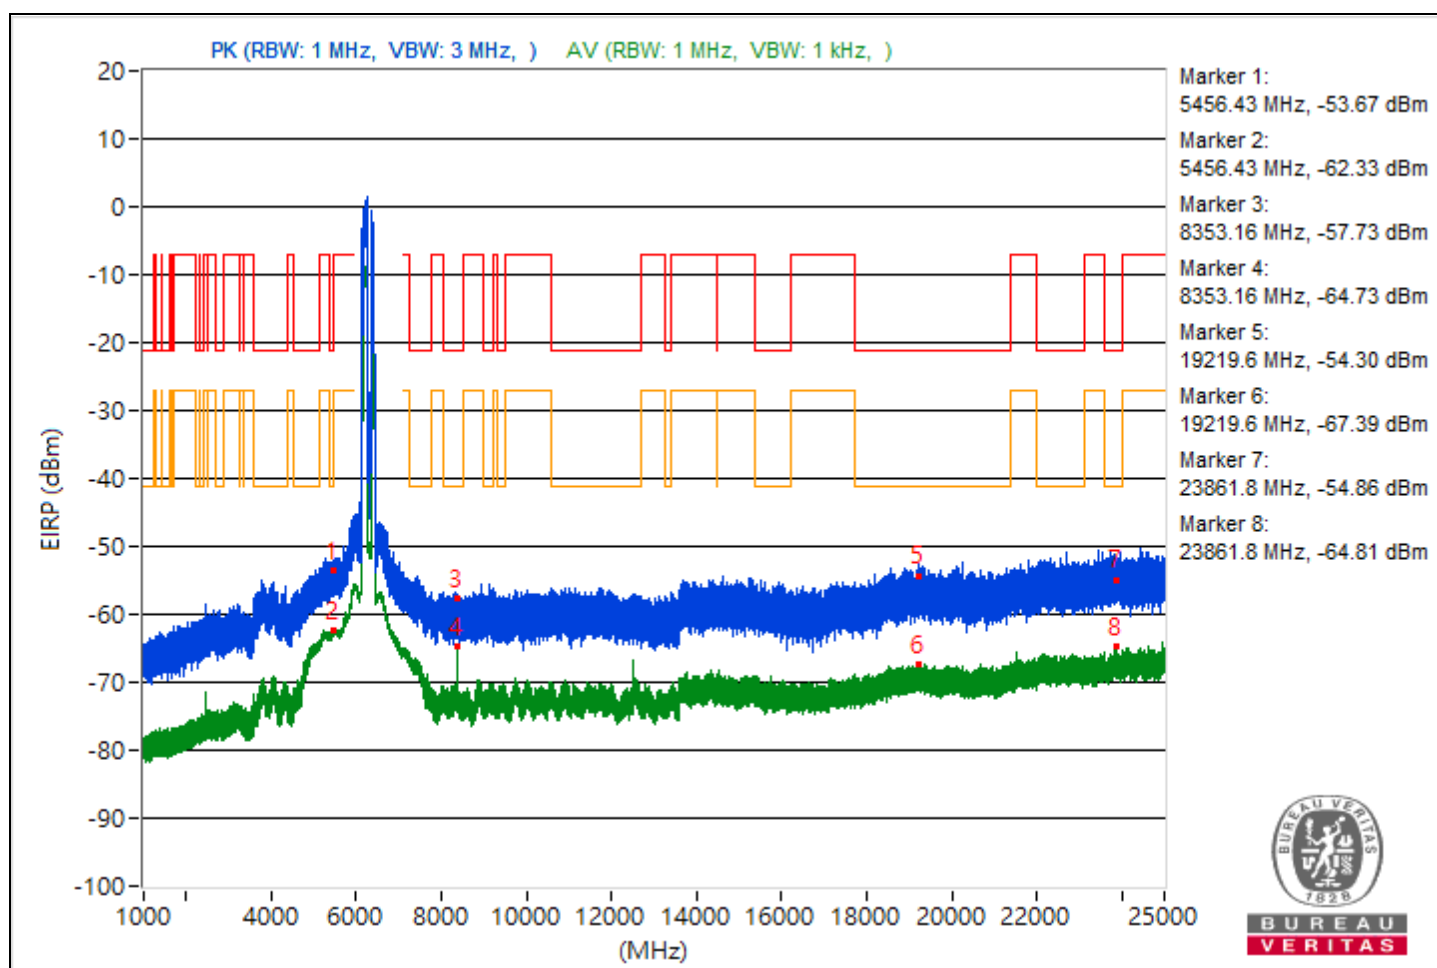

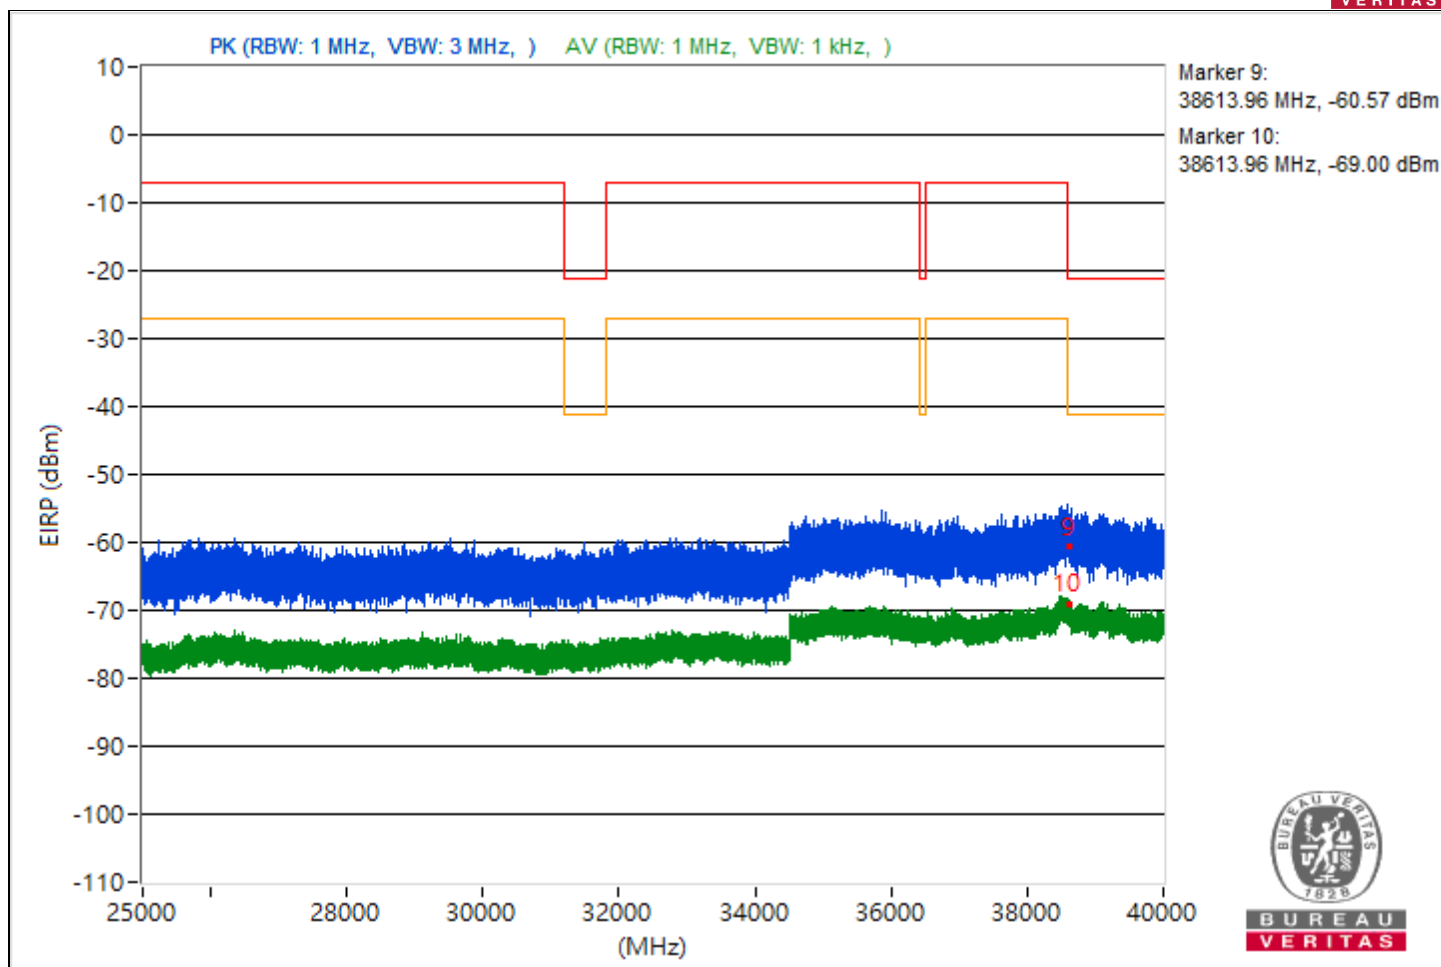





|                          |                                          |             |                  |
|--------------------------|------------------------------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT320) Punctured by 80+40 MHz | Channel     | CH 63 : 6265 MHz |
| Frequency Range          | 1 GHz ~ 40 GHz                           | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 62% RH                             | Tested By   | JyunChun.LIn     |

### Conducted Unwanted Emissions

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| 1   | 5440.96         | 39.16 PK                | 74             | -34.84      | -67.2                   | -67.36                  | 8.17                   | -56.1            |
| 2   | 5440.96         | 32.8 AV                 | 54             | -21.2       | -74.3                   | -73.06                  | 8.17                   | -62.46           |
| 3   | 8353.33         | 36.65 PK                | 74             | -37.35      | -70.16                  | -69.45                  | 8.17                   | -58.61           |
| 4   | 8353.33         | 30.23 AV                | 54             | -23.77      | -74.95                  | -77.98                  | 8.17                   | -65.03           |
| 5   | 19271.5         | 38.06 PK                | 74             | -35.94      | -66.97                  | -70.49                  | 8.17                   | -57.2            |
| 6   | 19271.5         | 27.92 AV                | 54             | -26.08      | -77.42                  | -79.99                  | 8.17                   | -67.34           |
| 7   | 23849.6         | 40.79 PK                | 74             | -33.21      | -65.85                  | -65.45                  | 8.17                   | -54.47           |
| 8   | 23849.6         | 29.72 AV                | 54             | -24.28      | -78.8                   | -75.32                  | 8.17                   | -65.54           |
| 9   | 38600.89        | 37.69 PK                | 74             | -36.31      | -66.59                  | -73.22                  | 8.17                   | -57.57           |
| 10  | 38600.89        | 25.88 AV                | 54             | -28.12      | -83.37                  | -78.86                  | 8.17                   | -69.38           |

Note: Margin value = Emission Level - Limit value

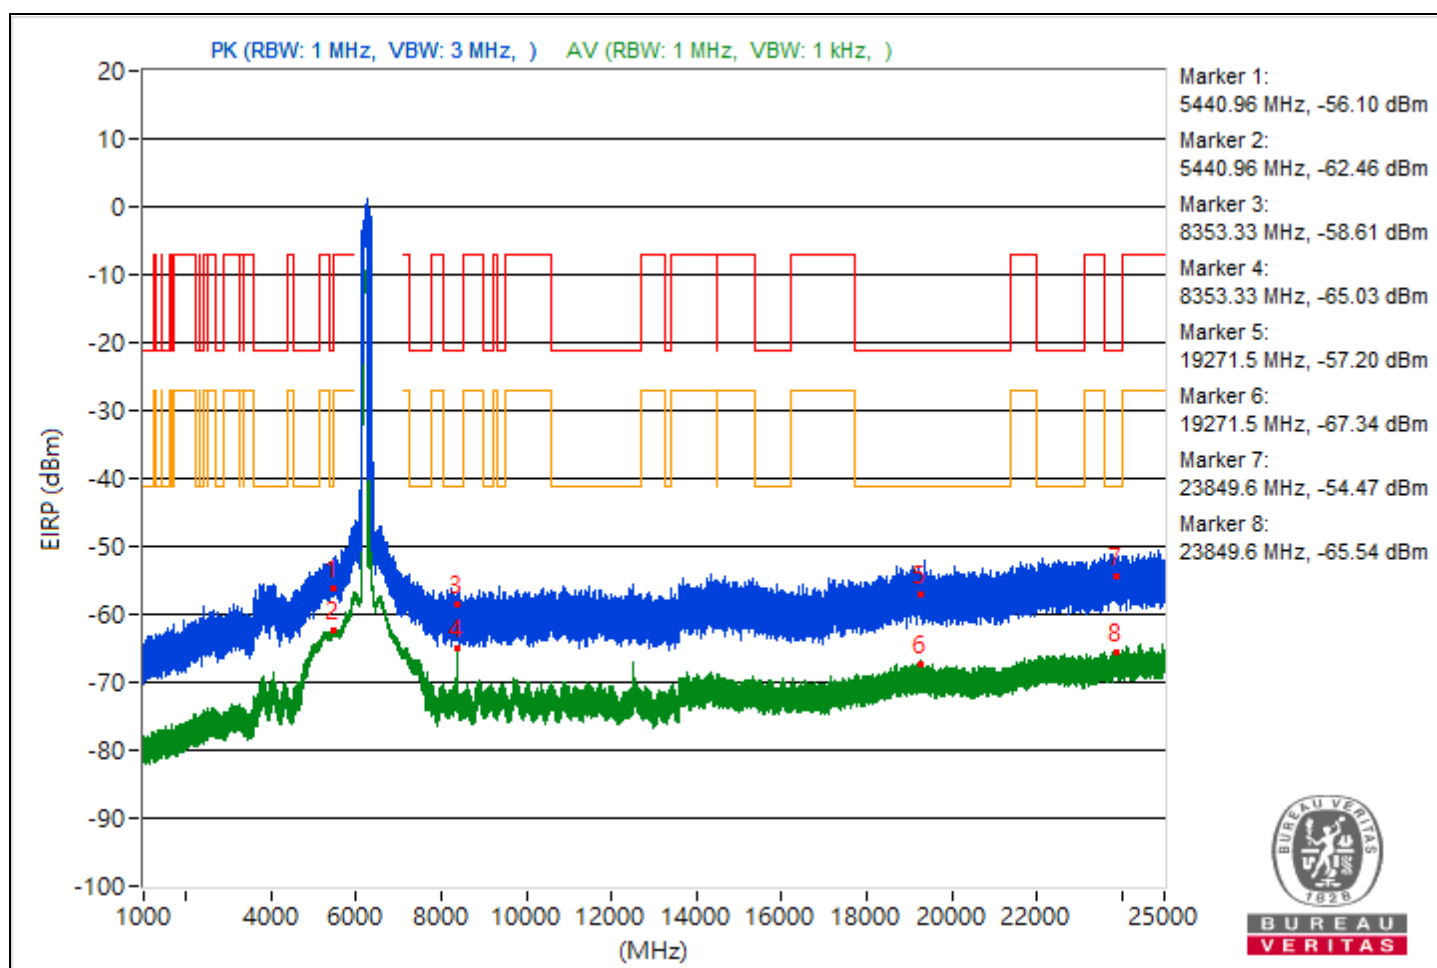

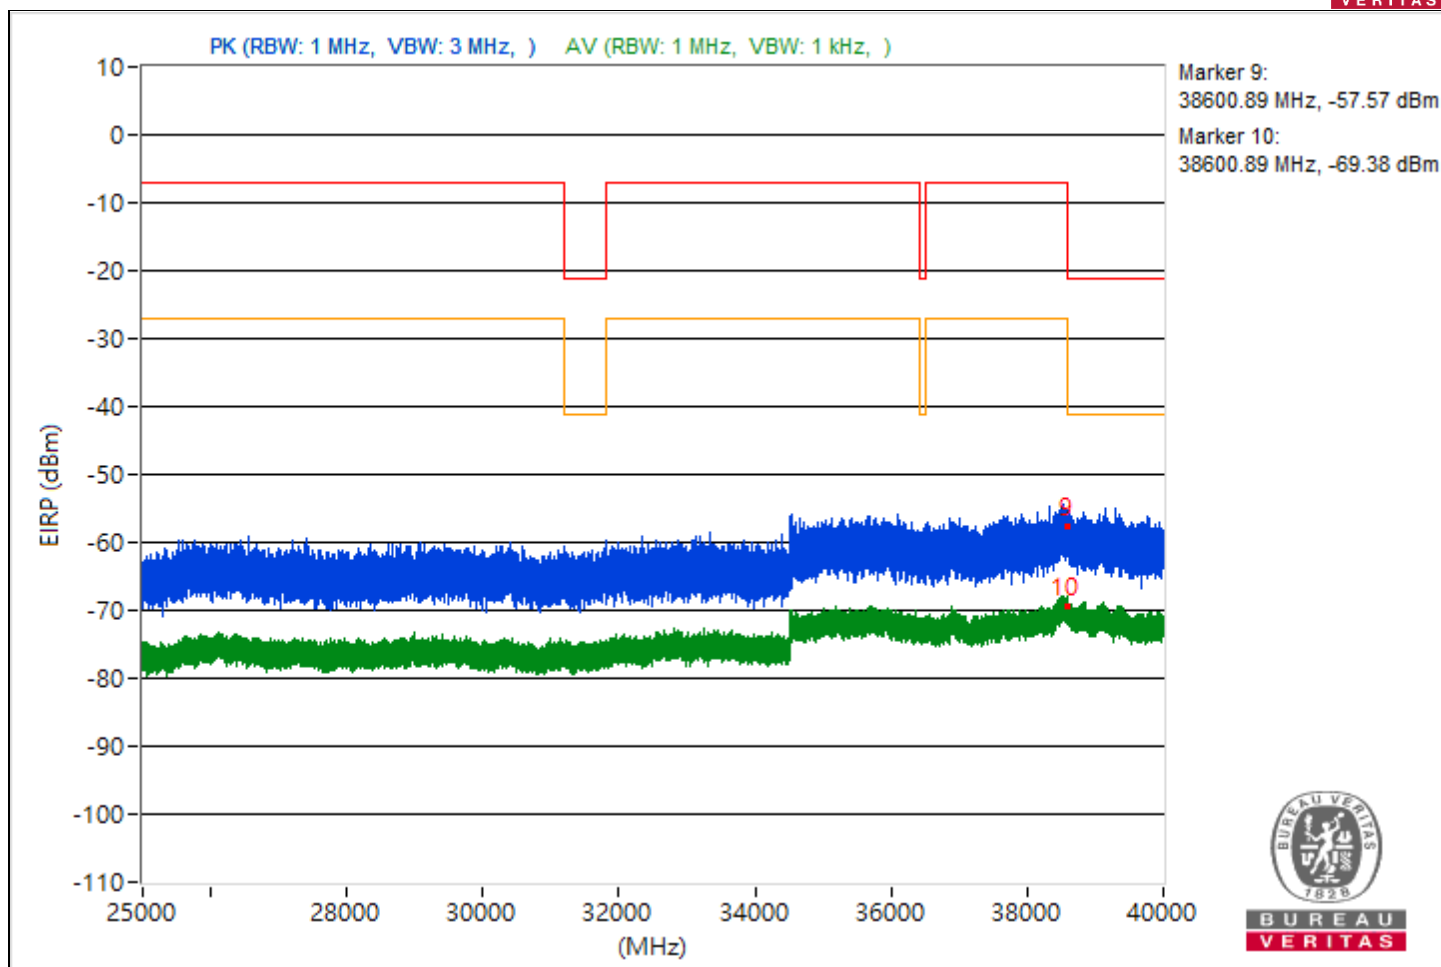


## Conducted Band Edges

|                          |                       |             |                 |
|--------------------------|-----------------------|-------------|-----------------|
| RF Mode                  | 802.11a               | Channel     | CH 2 : 5935 MHz |
| Frequency Range          | 5.825 GHz ~ 6.025 GHz | Input Power | 3.3 Vdc         |
| Environmental Conditions | 25°C, 60% RH          | Tested By   | Dolly Chung     |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5936.35        | 94.22 PK                |                |             | -13.13                  | -11.44                  | 8.15                   | -1.04            |
| 2                   | *5936.35        | 87 AV                   |                |             | -19.86                  | -19.02                  | 8.15                   | -8.26            |
| 3                   | #5924.98        | 78.64 PK                | 88.26          | -9.62       | -29.23                  | -26.7                   | 8.15                   | -16.62           |
| 4                   | #5924.98        | 64.61 AV                | 68.26          | -3.65       | -42.32                  | -41.36                  | 8.15                   | -30.65           |

### Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

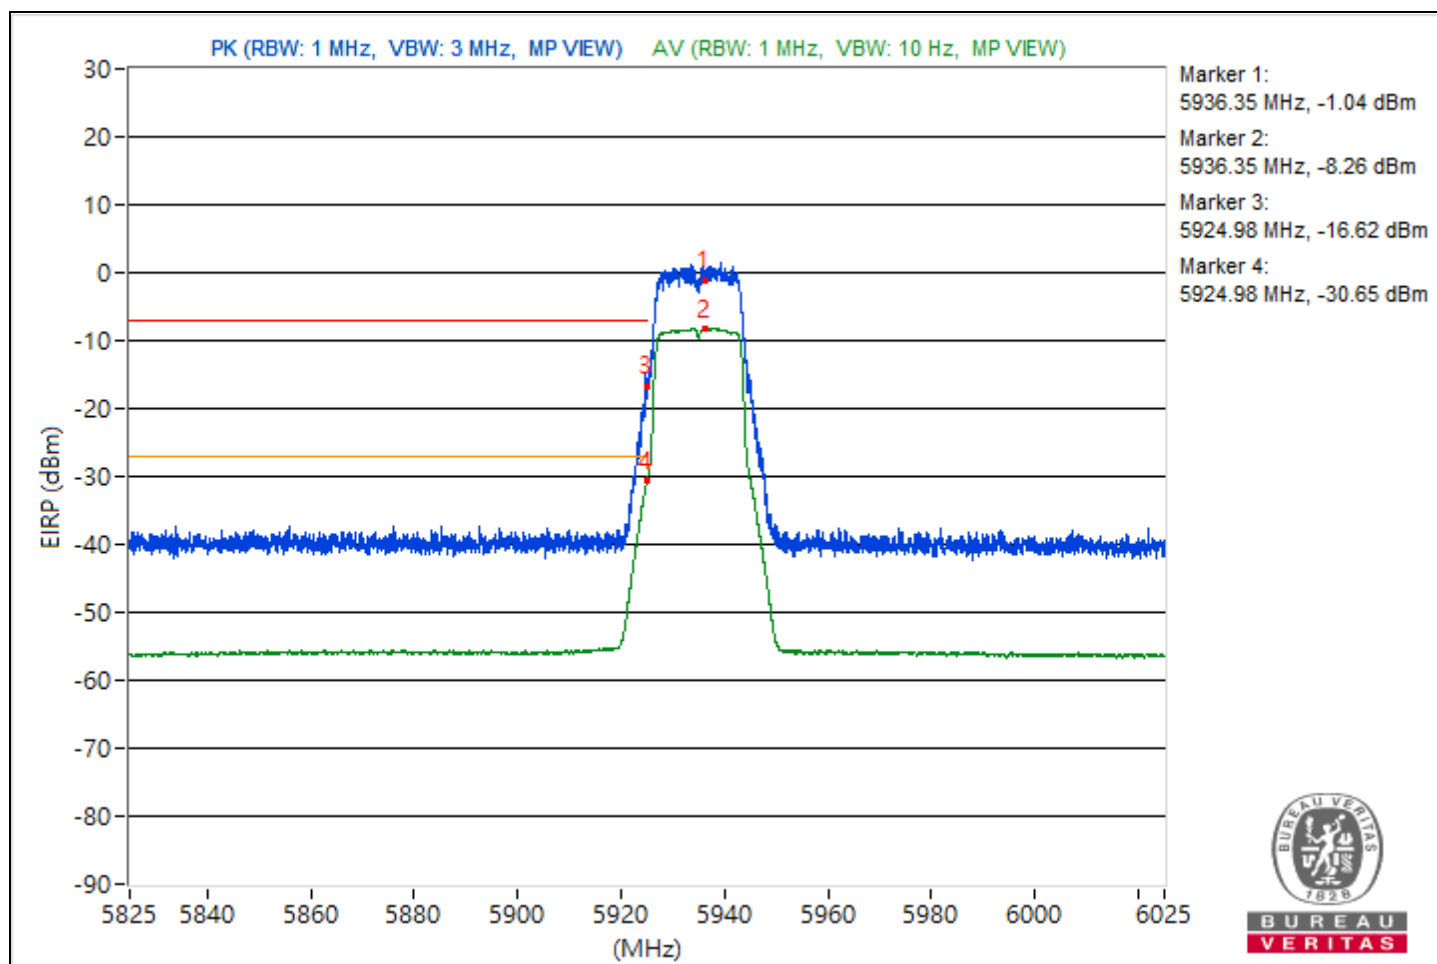


|                          |                       |             |                 |
|--------------------------|-----------------------|-------------|-----------------|
| RF Mode                  | 802.11a               | Channel     | CH 1 : 5955 MHz |
| Frequency Range          | 5.825 GHz ~ 6.025 GHz | Input Power | 3.3 Vdc         |
| Environmental Conditions | 25°C, 60% RH          | Tested By   | Dolly Chung     |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5954.07        | 94.77 PK                |                |             | -12.58                  | -10.89                  | 8.15                   | -0.49            |
| 2                   | *5954.07        | 87.13 AV                |                |             | -19.69                  | -18.92                  | 8.15                   | -8.13            |
| 3                   | #5917.55        | 54.5 PK                 | 88.26          | -33.76      | -51.99                  | -51.85                  | 8.15                   | -40.76           |
| 4                   | #5917.55        | 39.74 AV                | 68.26          | -28.52      | -66.56                  | -66.8                   | 8.15                   | -55.52           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

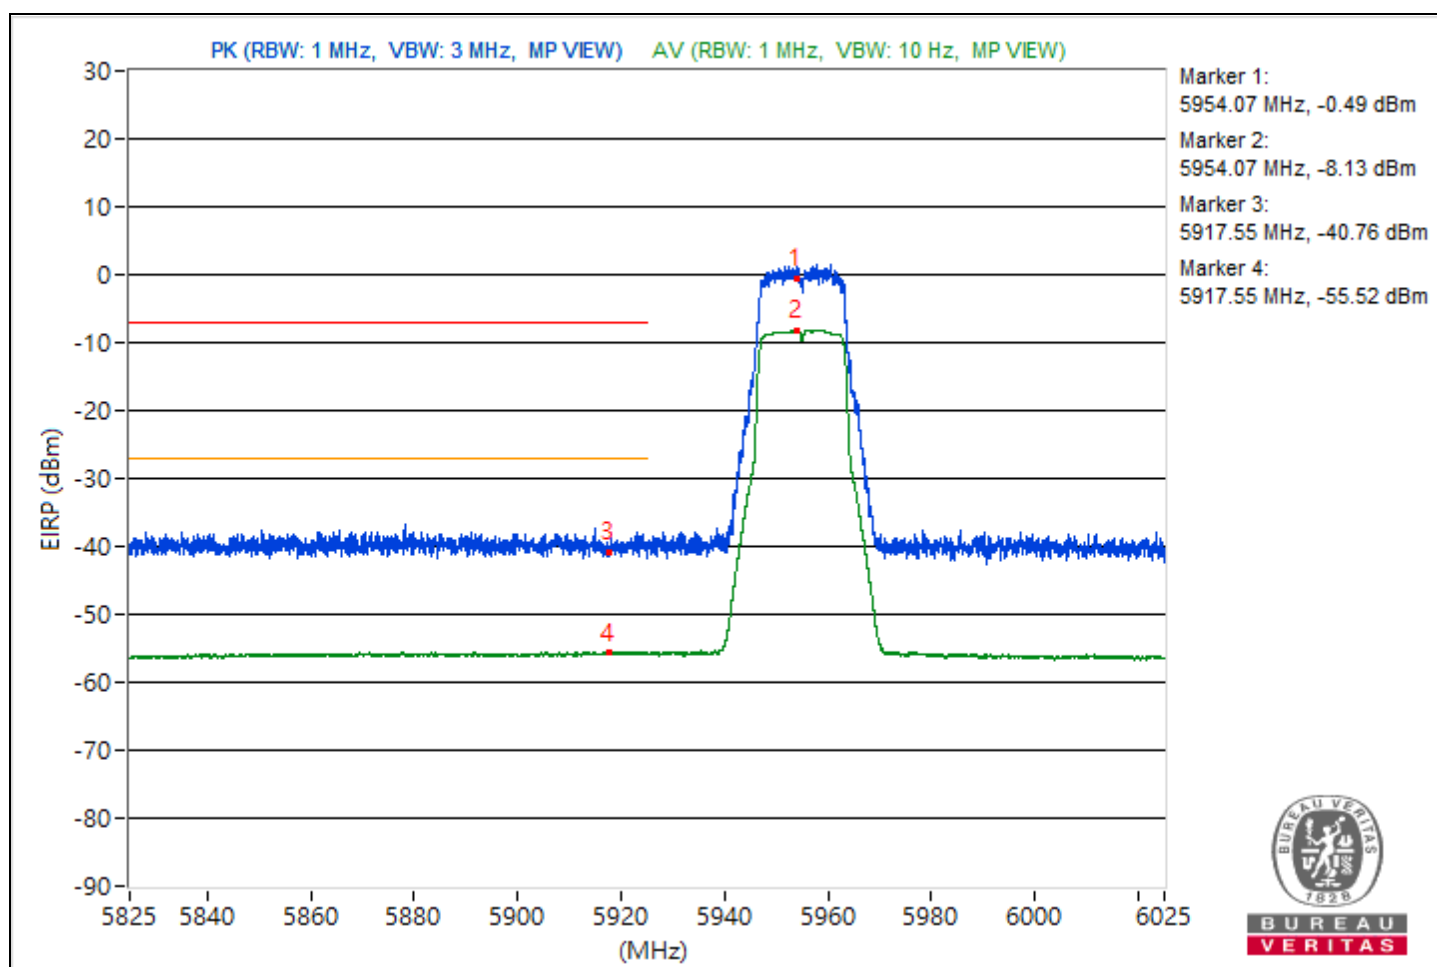


|                          |                     |             |                   |
|--------------------------|---------------------|-------------|-------------------|
| RF Mode                  | 802.11a             | Channel     | CH 181 : 6855 MHz |
| Frequency Range          | 6.7 GHz ~ 7.225 GHz | Input Power | 3.3 Vdc           |
| Environmental Conditions | 25°C, 60% RH        | Tested By   | Dolly Chung       |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6856.58        | 94.58 PK                |                |             | -13.53                  | -10.66                  | 8.17                   | -0.68            |
| 2                   | *6856.58        | 86.51 AV                |                |             | -20.53                  | -19.41                  | 8.17                   | -8.75            |
| 3                   | #7209.12        | 46.55 PK                | 88.26          | -41.71      | -58.81                  | -61.33                  | 8.17                   | -48.71           |
| 4                   | #7209.12        | 31.69 AV                | 68.26          | -36.57      | -74.55                  | -74.96                  | 8.17                   | -63.57           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

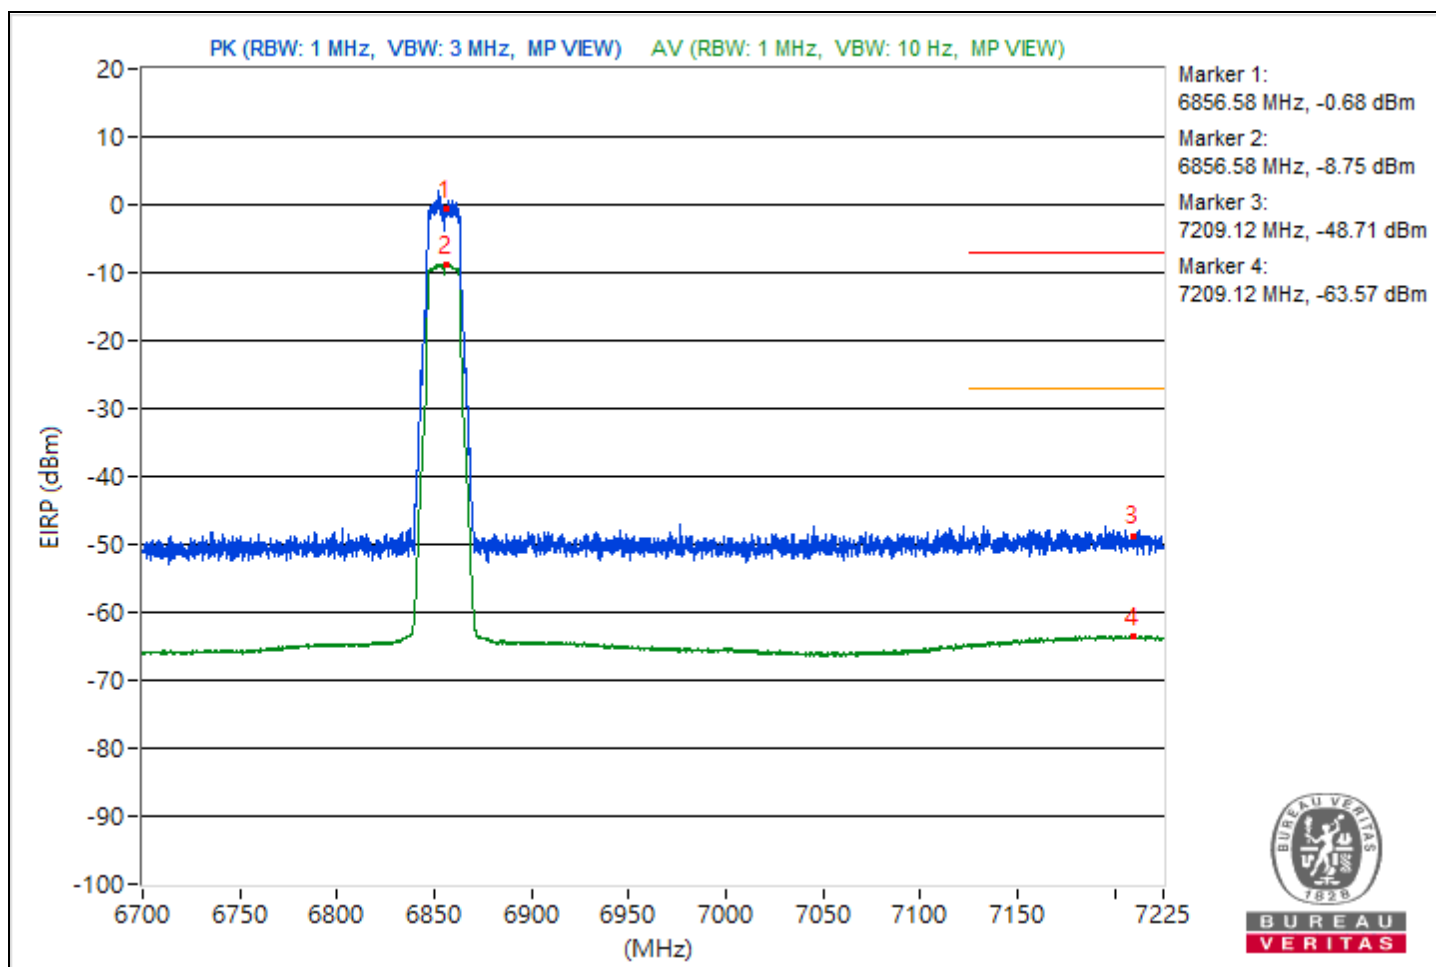


|                          |                       |             |                 |
|--------------------------|-----------------------|-------------|-----------------|
| RF Mode                  | 802.11be (EHT20)      | Channel     | CH 2 : 5935 MHz |
| Frequency Range          | 5.825 GHz ~ 6.025 GHz | Input Power | 3.3 Vdc         |
| Environmental Conditions | 25°C, 60% RH          | Tested By   | Dolly Chung     |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5933.48        | 85.65 PK                |                |             | -20.96                  | -20.58                  | 8.15                   | -9.61            |
| 2                   | *5933.48        | 77.69 AV                |                |             | -29.17                  | -28.34                  | 8.15                   | -17.57           |
| 3                   | #5924.98        | 76.87 PK                | 88.26          | -11.39      | -29.94                  | -29.2                   | 8.15                   | -18.39           |
| 4                   | #5924.98        | 68.1 AV                 | 68.26          | -0.16       | -38.49                  | -38.16                  | 8.15                   | -27.16           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

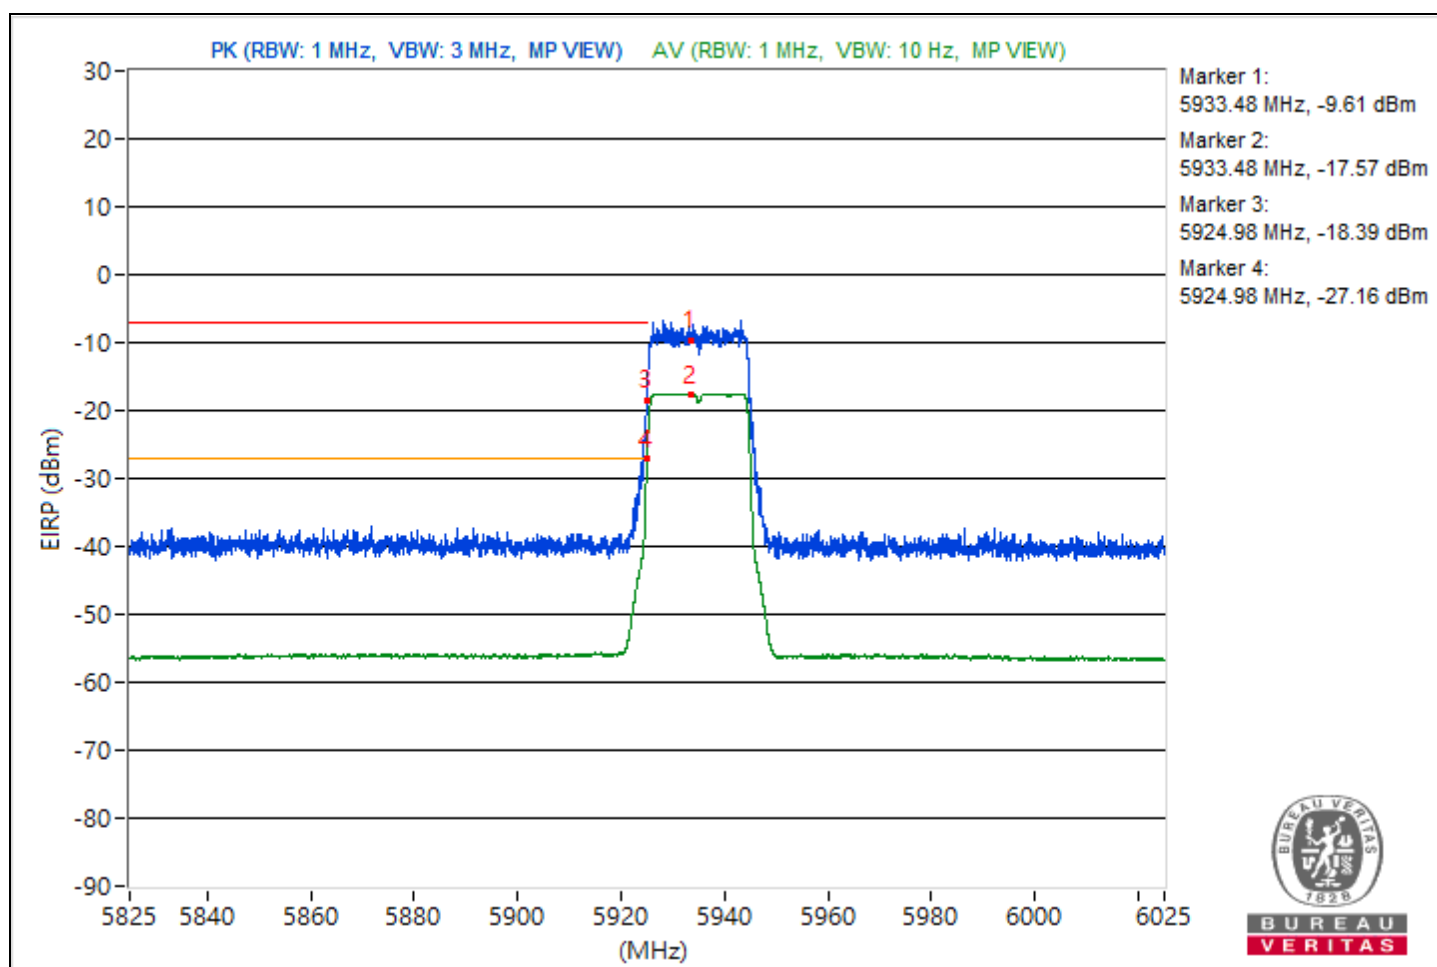


|                          |                       |             |                 |
|--------------------------|-----------------------|-------------|-----------------|
| RF Mode                  | 802.11be (EHT20)      | Channel     | CH 1 : 5955 MHz |
| Frequency Range          | 5.825 GHz ~ 6.025 GHz | Input Power | 3.3 Vdc         |
| Environmental Conditions | 25°C, 60% RH          | Tested By   | Dolly Chung     |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5956.1         | 97.17 PK                |                |             | -11.94                  | -7.61                   | 8.15                   | 1.91             |
| 2                   | *5956.1         | 89.02 AV                |                |             | -19.79                  | -15.87                  | 8.15                   | -6.24            |
| 3                   | #5825           | 55.41 PK                | 88.26          | -32.85      | -50.52                  | -51.55                  | 8.15                   | -39.85           |
| 4                   | #5825           | 43.01 AV                | 68.26          | -25.25      | -67.57                  | -61.32                  | 8.15                   | -52.25           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

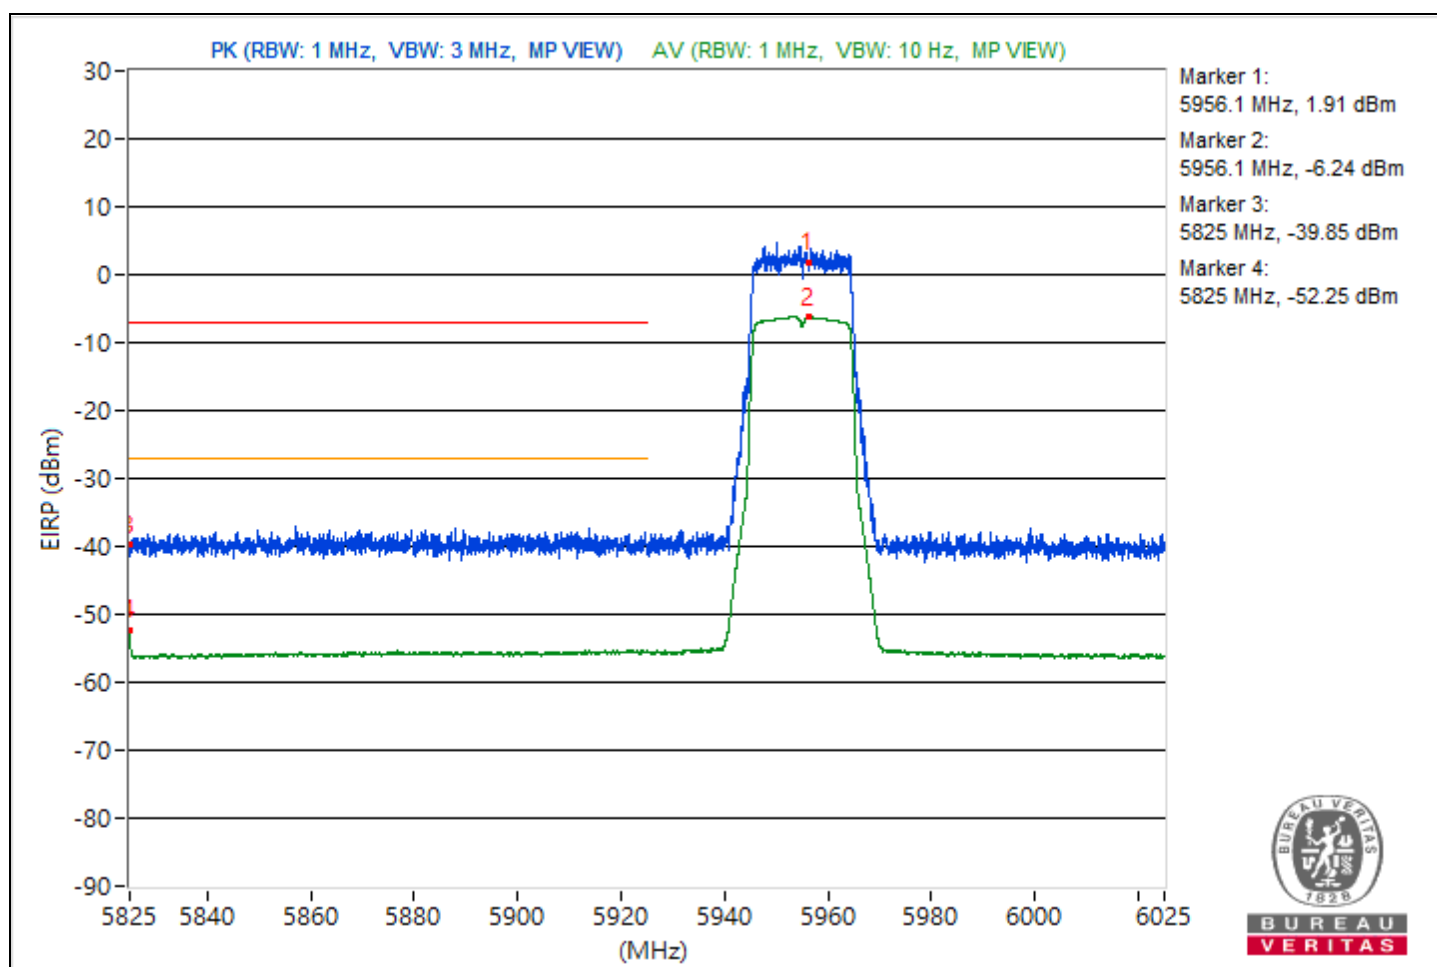


|                          |                     |             |                   |
|--------------------------|---------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT20)    | Channel     | CH 181 : 6855 MHz |
| Frequency Range          | 6.7 GHz ~ 7.225 GHz | Input Power | 3.3 Vdc           |
| Environmental Conditions | 25°C, 60% RH        | Tested By   | Dolly Chung       |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6856.71        | 95.58 PK                |                |             | -11.52                  | -10.29                  | 8.17                   | 0.32             |
| 2                   | *6856.71        | 86.48 AV                |                |             | -20.63                  | -19.39                  | 8.17                   | -8.78            |
| 3                   | #7203.67        | 45.41 PK                | 88.26          | -42.85      | -60.99                  | -61.06                  | 8.17                   | -49.85           |
| 4                   | #7203.67        | 31.72 AV                | 68.26          | -36.54      | -74.79                  | -74.65                  | 8.17                   | -63.54           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

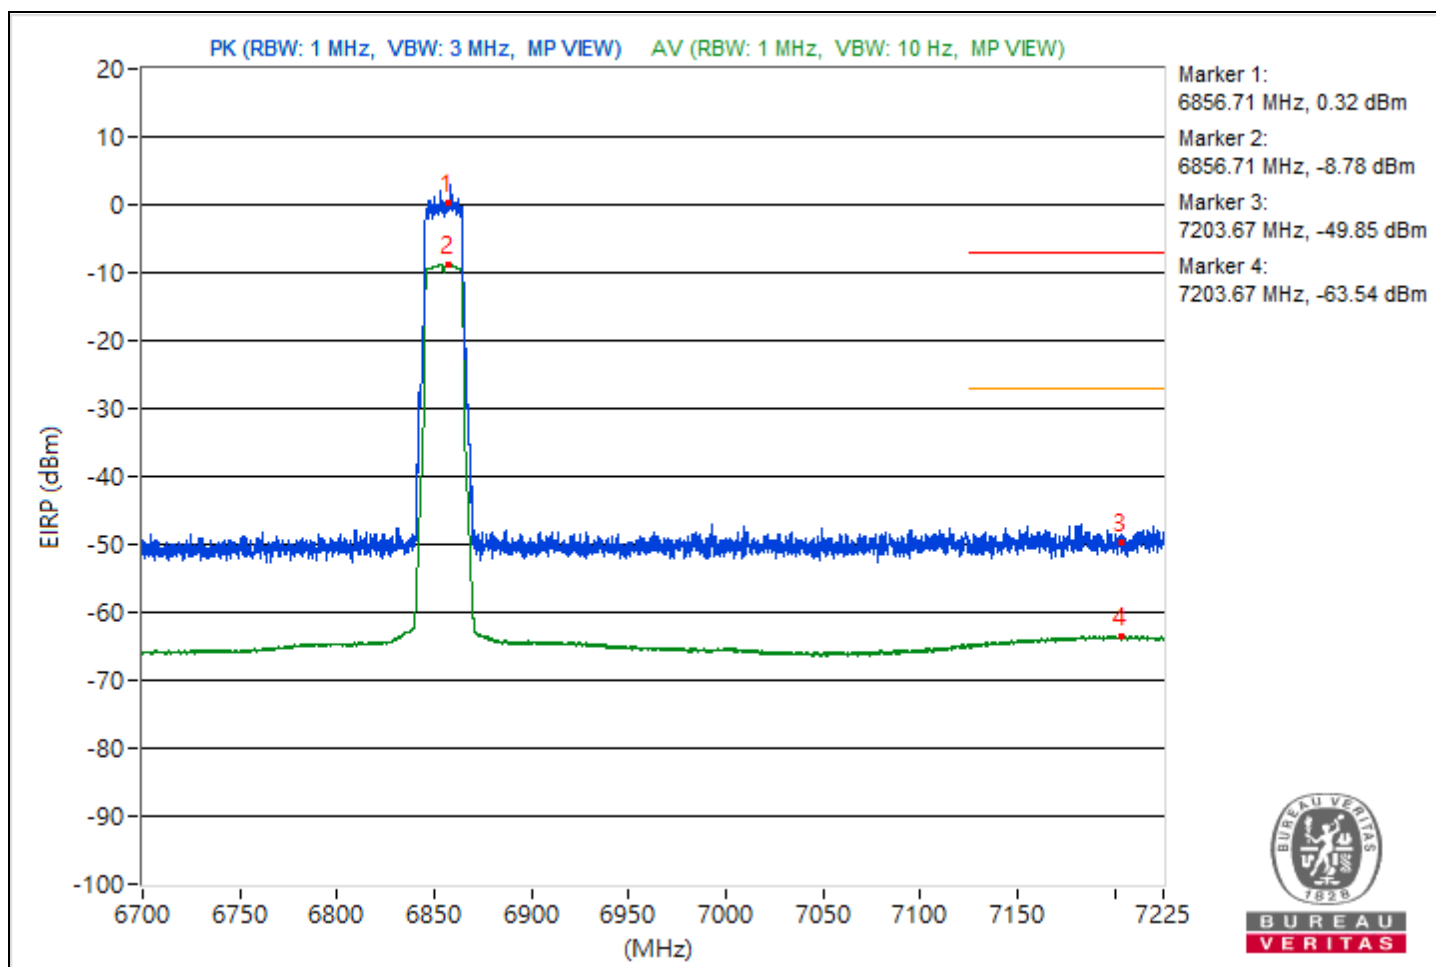




|                          |                       |             |                 |
|--------------------------|-----------------------|-------------|-----------------|
| RF Mode                  | 802.11be (EHT40)      | Channel     | CH 3 : 5965 MHz |
| Frequency Range          | 5.825 GHz ~ 6.025 GHz | Input Power | 3.3 Vdc         |
| Environmental Conditions | 24°C, 63% RH          | Tested By   | JyunChun.Lin    |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5962.77        | 97.52 PK                |                |             | -9.67                   | -8.25                   | 8.15                   | 2.26             |
| 2                   | *5962.77        | 86.9 AV                 |                |             | -19.9                   | -19.16                  | 8.15                   | -8.36            |
| 3                   | #5899.07        | 47.09 PK                | 88.26          | -41.17      | -59.03                  | -59.65                  | 8.15                   | -48.17           |
| 4                   | #5899.07        | 33.96 AV                | 68.26          | -34.3       | -72.97                  | -72                     | 8.15                   | -61.3            |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

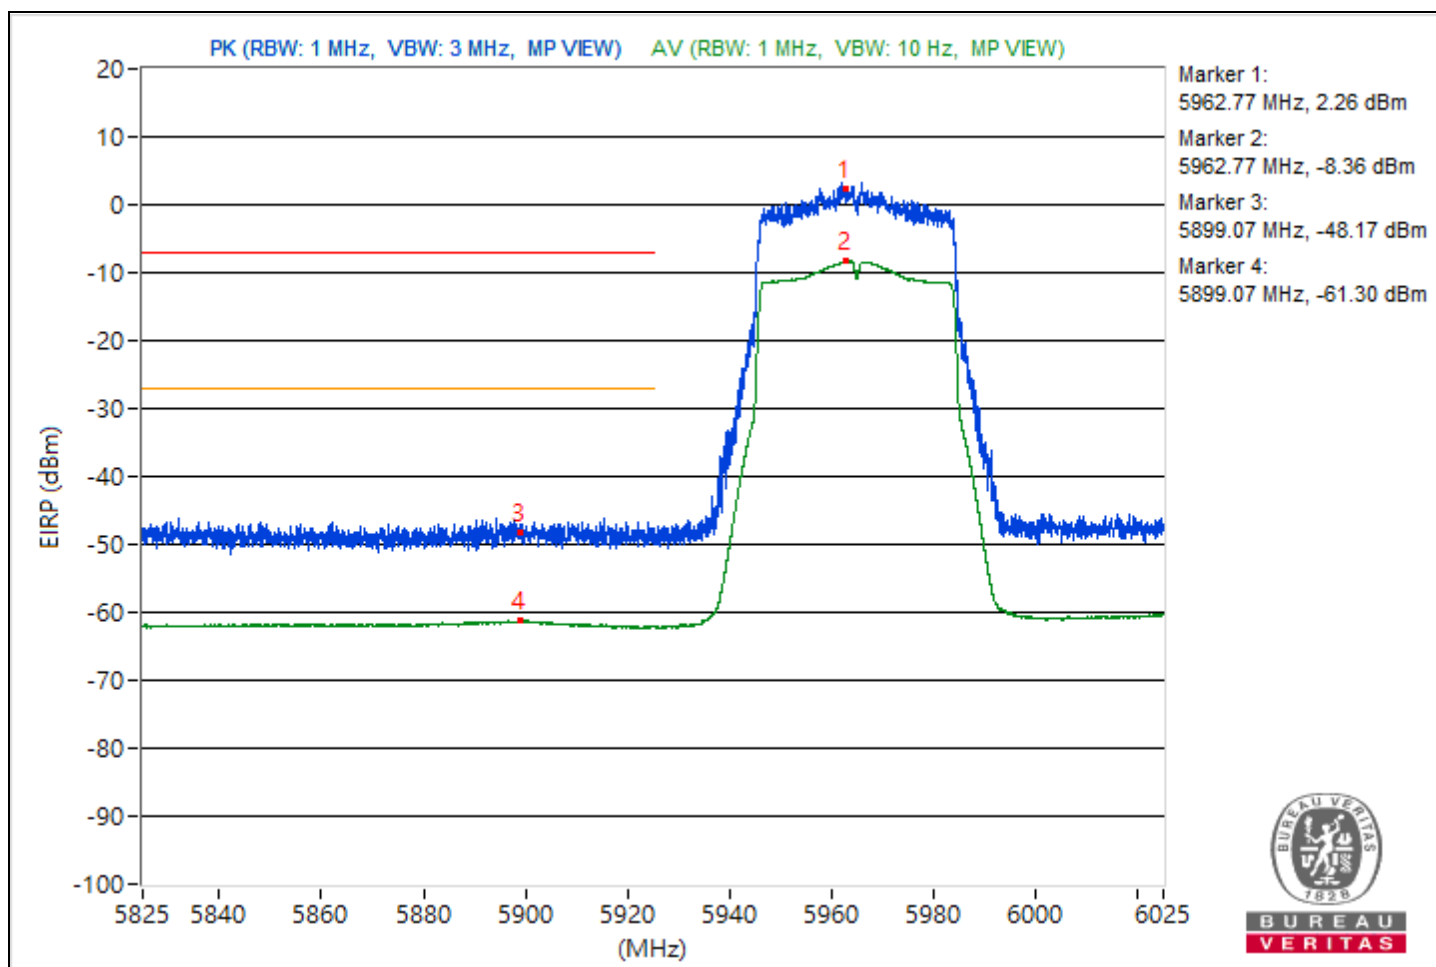


|                          |                       |             |                   |
|--------------------------|-----------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT40)      | Channel     | CH 179 : 6845 MHz |
| Frequency Range          | 6.825 GHz ~ 7.425 GHz | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH          | Tested By   | JyunChun.Lin      |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6846.98        | 95.57 PK                |                |             | -11.78                  | -10.11                  | 8.17                   | 0.31             |
| 2                   | *6846.98        | 86.36 AV                |                |             | -20.72                  | -19.52                  | 8.17                   | -8.9             |
| 3                   | #7179           | 47.38 PK                | 88.26          | -40.88      | -59.57                  | -58.6                   | 8.17                   | -47.88           |
| 4                   | #7179           | 33.08 AV                | 68.26          | -35.18      | -73.57                  | -73.17                  | 8.17                   | -62.18           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

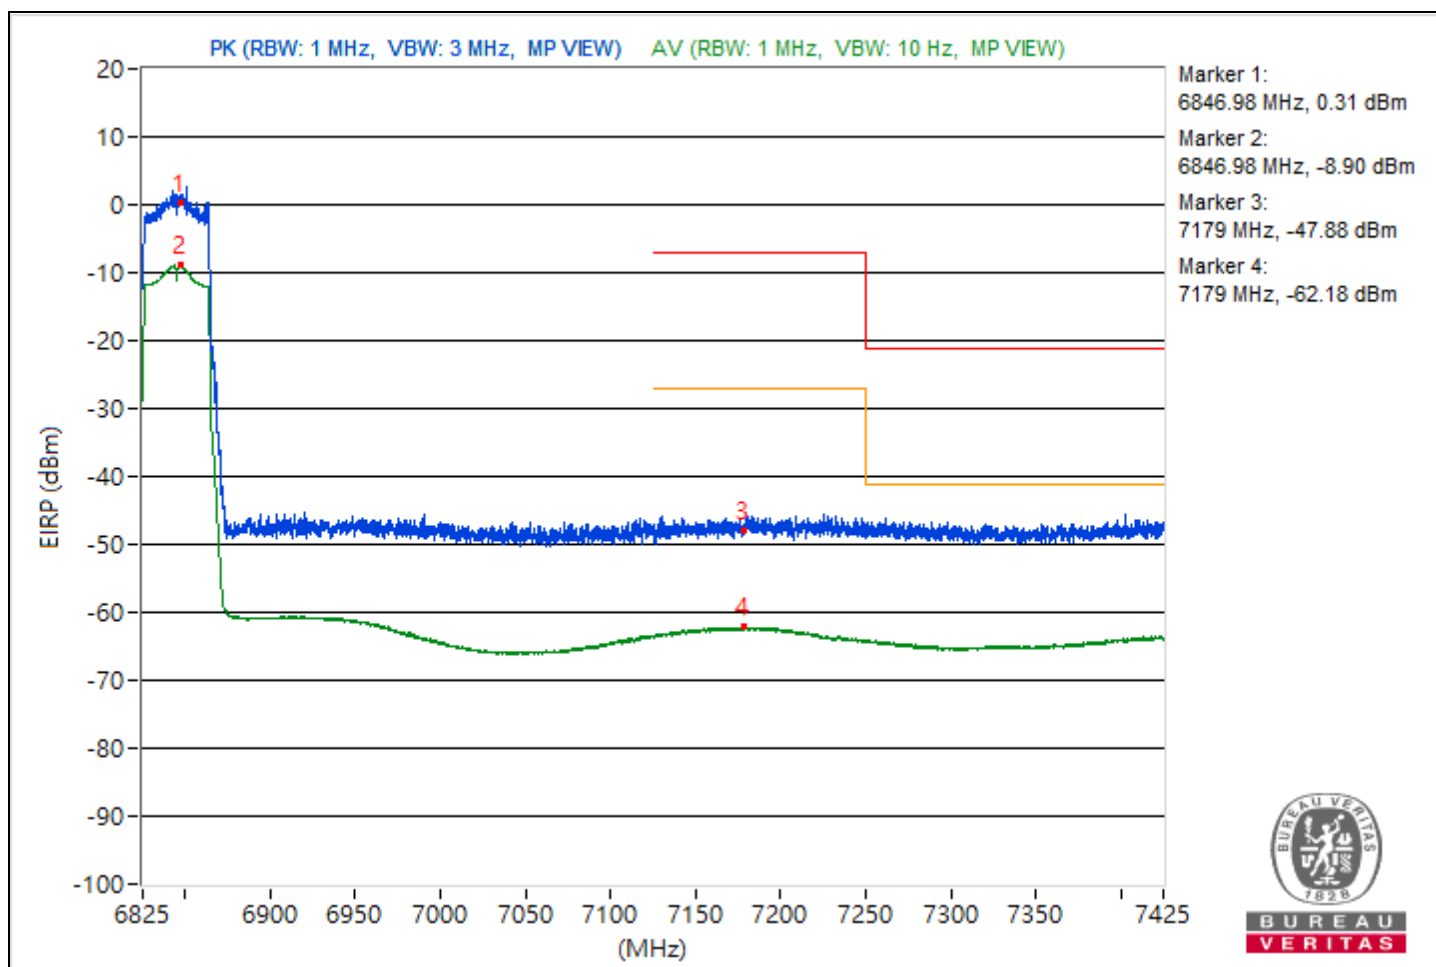


|                          |                       |             |                 |
|--------------------------|-----------------------|-------------|-----------------|
| RF Mode                  | 802.11be (EHT80)      | Channel     | CH 7 : 5985 MHz |
| Frequency Range          | 5.825 GHz ~ 6.025 GHz | Input Power | 3.3 Vdc         |
| Environmental Conditions | 24°C, 63% RH          | Tested By   | JyunChun.Lin    |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5987.3         | 96.16 PK                |                |             | -10.17                  | -10.34                  | 8.15                   | 0.9              |
| 2                   | *5987.3         | 86.48 AV                |                |             | -20.31                  | -19.61                  | 8.15                   | -8.78            |
| 3                   | #5924.62        | 47 PK                   | 88.26          | -41.26      | -57.84                  | -61.94                  | 8.15                   | -48.26           |
| 4                   | #5924.62        | 35.77 AV                | 68.26          | -32.49      | -70.61                  | -70.68                  | 8.15                   | -59.49           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

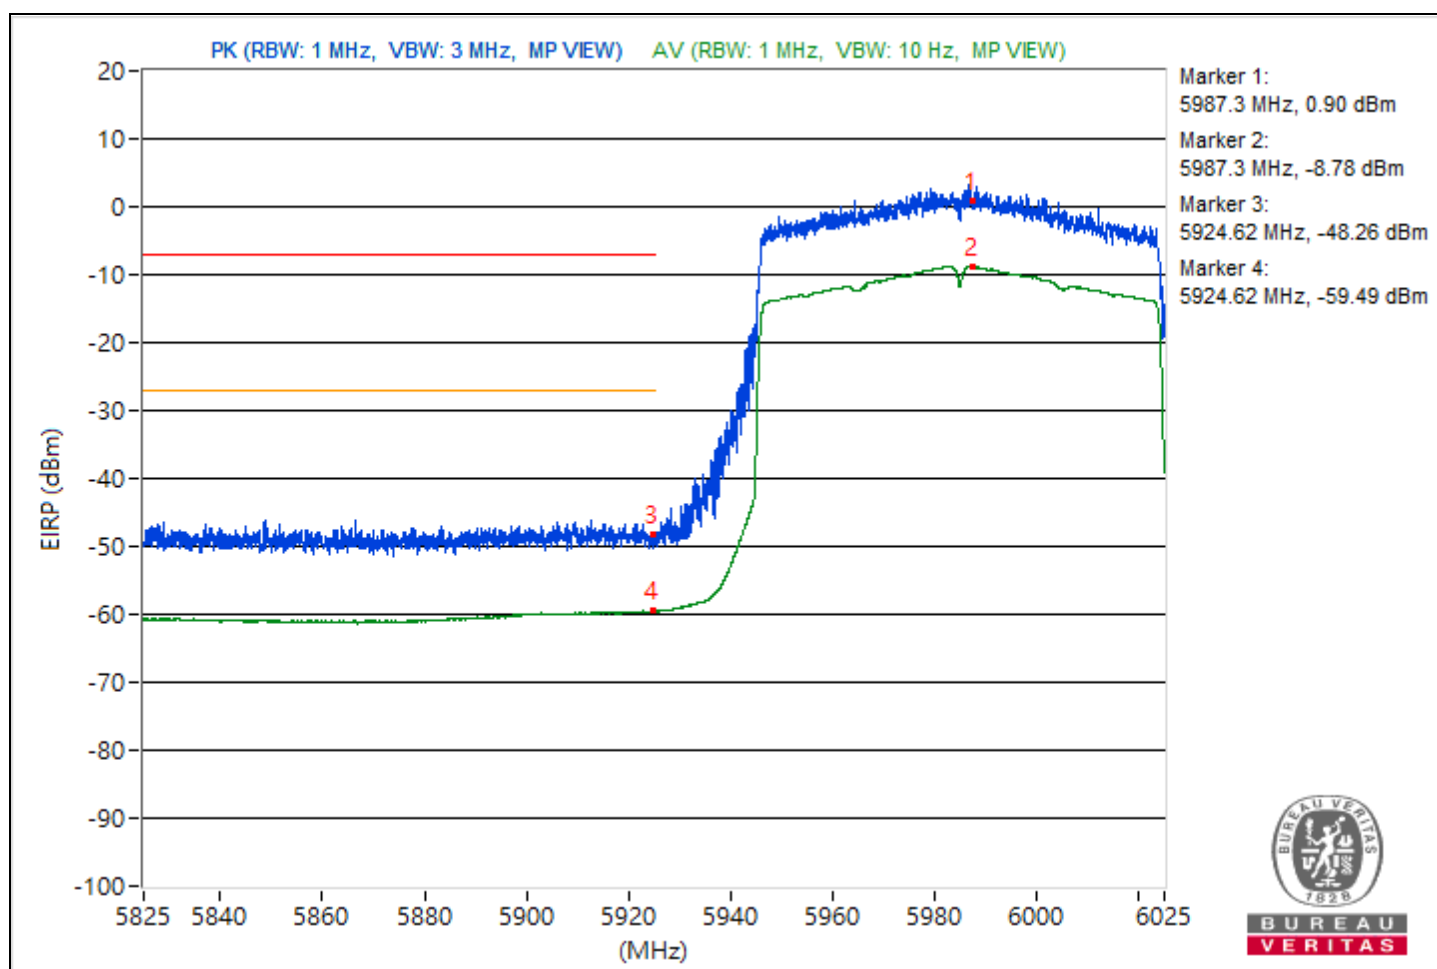


|                          |                       |             |                   |
|--------------------------|-----------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT80)      | Channel     | CH 167 : 6785 MHz |
| Frequency Range          | 6.725 GHz ~ 7.525 GHz | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH          | Tested By   | JyunChun.Lin      |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6787.2         | 94.99 PK                |                |             | -11.8                   | -11.13                  | 8.17                   | -0.27            |
| 2                   | *6787.2         | 85.96 AV                |                |             | -20.8                   | -20.19                  | 8.17                   | -9.3             |
| 3                   | #7185.1         | 46.74 PK                | 88.26          | -41.52      | -59.8                   | -59.61                  | 8.17                   | -48.52           |
| 4                   | #7185.1         | 33.48 AV                | 68.26          | -34.78      | -72.71                  | -73.21                  | 8.17                   | -61.78           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

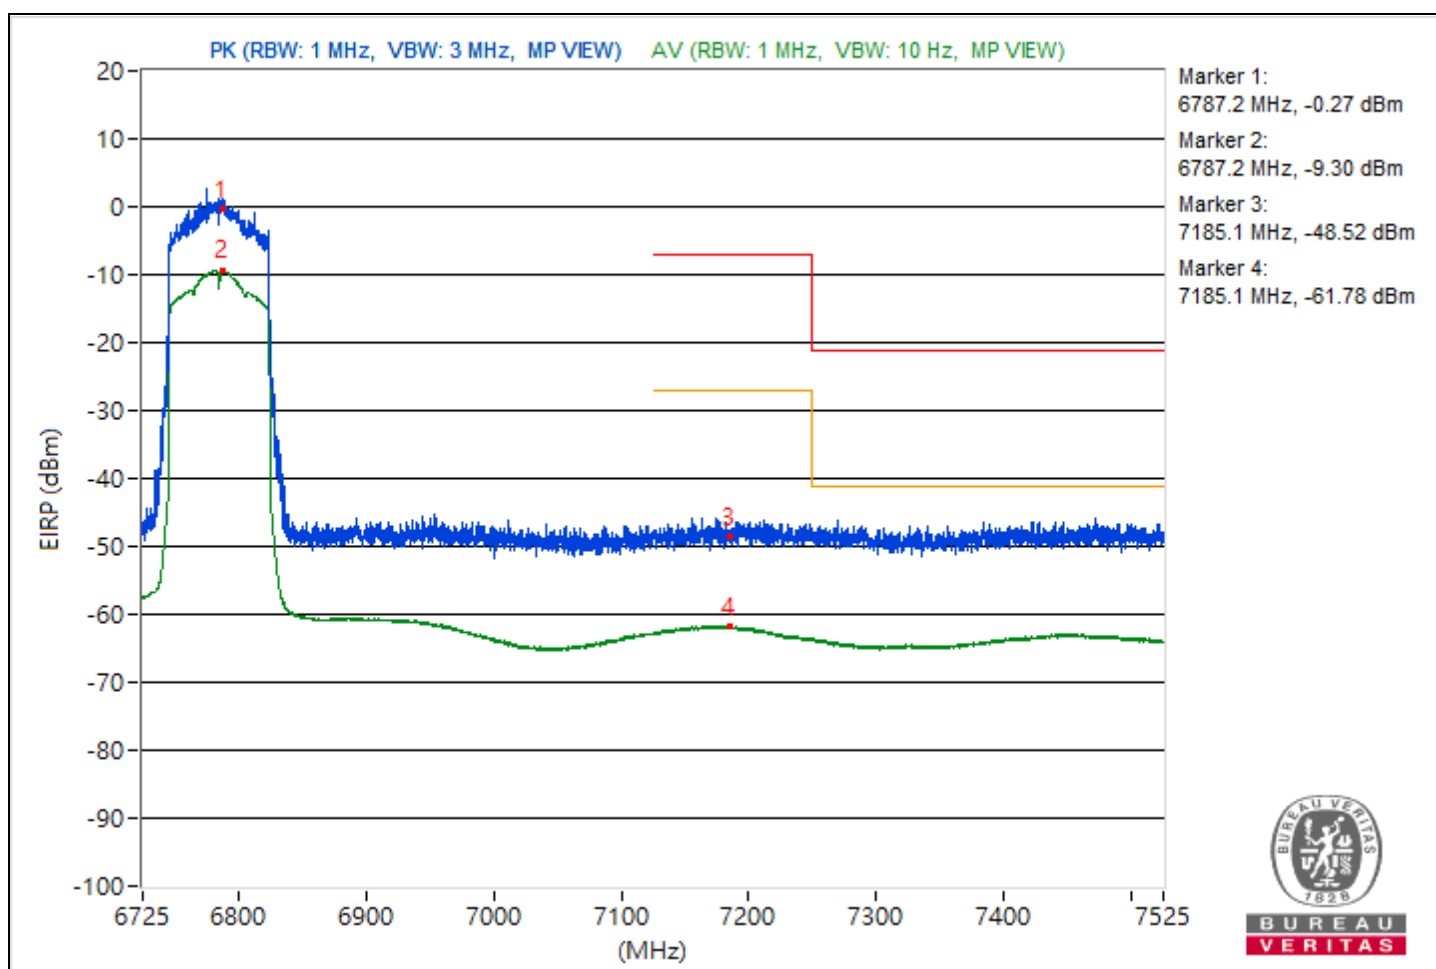


|                          |                       |             |                  |
|--------------------------|-----------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT160)     | Channel     | CH 15 : 6025 MHz |
| Frequency Range          | 5.825 GHz ~ 6.025 GHz | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 63% RH          | Tested By   | JyunChun.Lin     |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6022.43        | 96.53 PK                |                |             | -10.58                  | -9.3                    | 8.15                   | 1.27             |
| 2                   | *6022.43        | 86.78 AV                |                |             | -20.24                  | -19.12                  | 8.15                   | -8.48            |
| 3                   | #5825           | 48.91 PK                | 88.26          | -39.35      | -58.18                  | -56.93                  | 8.15                   | -46.35           |
| 4                   | #5825           | 38.64 AV                | 68.26          | -29.62      | -66.91                  | -68.89                  | 8.15                   | -56.62           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

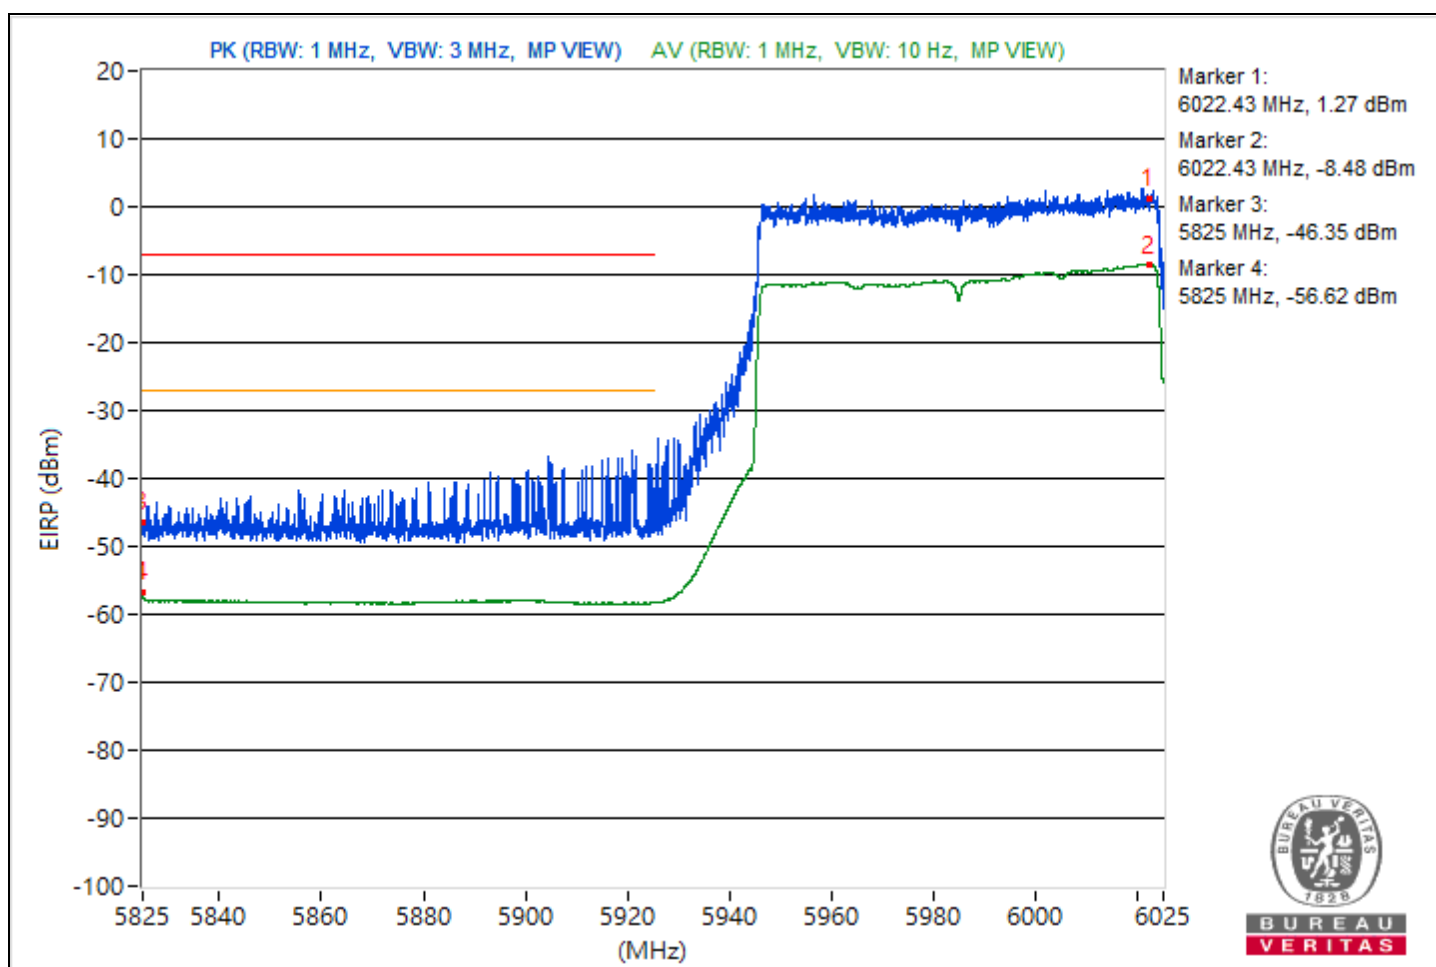


|                          |                       |             |                   |
|--------------------------|-----------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT160)     | Channel     | CH 143 : 6665 MHz |
| Frequency Range          | 6.625 GHz ~ 7.625 GHz | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 63% RH          | Tested By   | JyunChun.Lin      |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6671           | 96.76 PK                |                |             | -11.94                  | -8.2                    | 8.17                   | 1.5              |
| 2                   | *6671           | 86.91 AV                |                |             | -20.3                   | -18.87                  | 8.17                   | -8.35            |
| 3                   | #7170.87        | 47.43 PK                | 88.26          | -40.83      | -58.4                   | -59.73                  | 8.17                   | -47.83           |
| 4                   | #7170.87        | 33.98 AV                | 68.26          | -34.28      | -71.92                  | -73.07                  | 8.17                   | -61.28           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

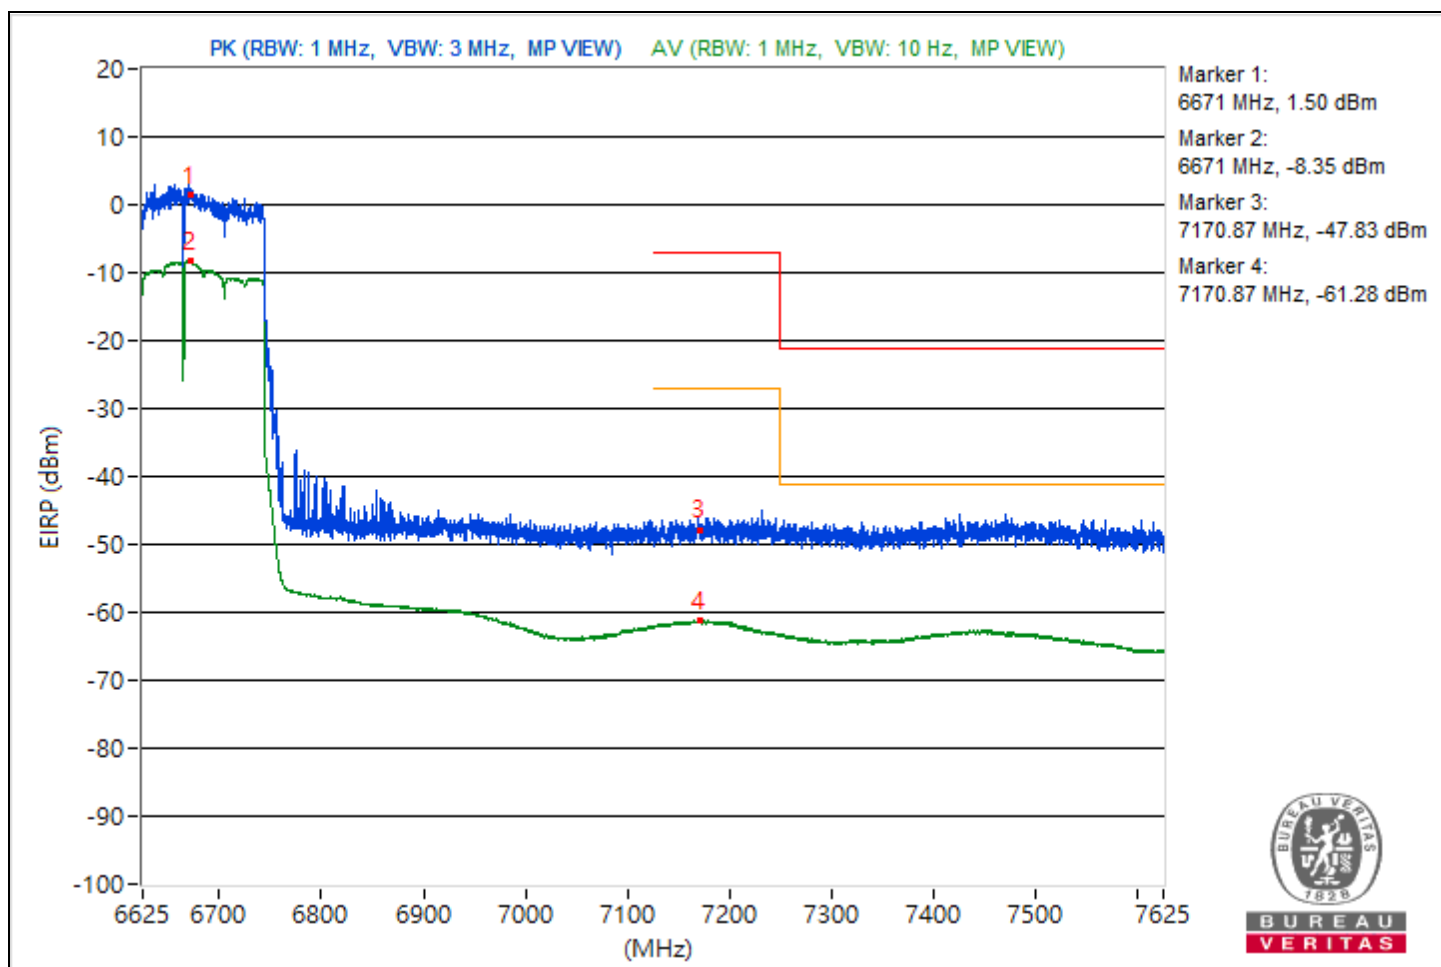


|                          |                       |             |                  |
|--------------------------|-----------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT320)     | Channel     | CH 31 : 6105 MHz |
| Frequency Range          | 5.825 GHz ~ 6.025 GHz | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 63% RH          | Tested By   | JyunChun.Lin     |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6023.18        | 91.8 PK                 |                |             | -14.13                  | -15.17                  | 8.15                   | -3.46            |
| 2                   | *6023.18        | 83.97 AV                |                |             | -23.31                  | -21.74                  | 8.15                   | -11.29           |
| 3                   | #5831.8         | 48.99 PK                | 88.26          | -39.27      | -57.02                  | -57.88                  | 8.15                   | -46.27           |
| 4                   | #5831.8         | 41.32 AV                | 68.26          | -26.94      | -65.55                  | -64.7                   | 8.15                   | -53.94           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

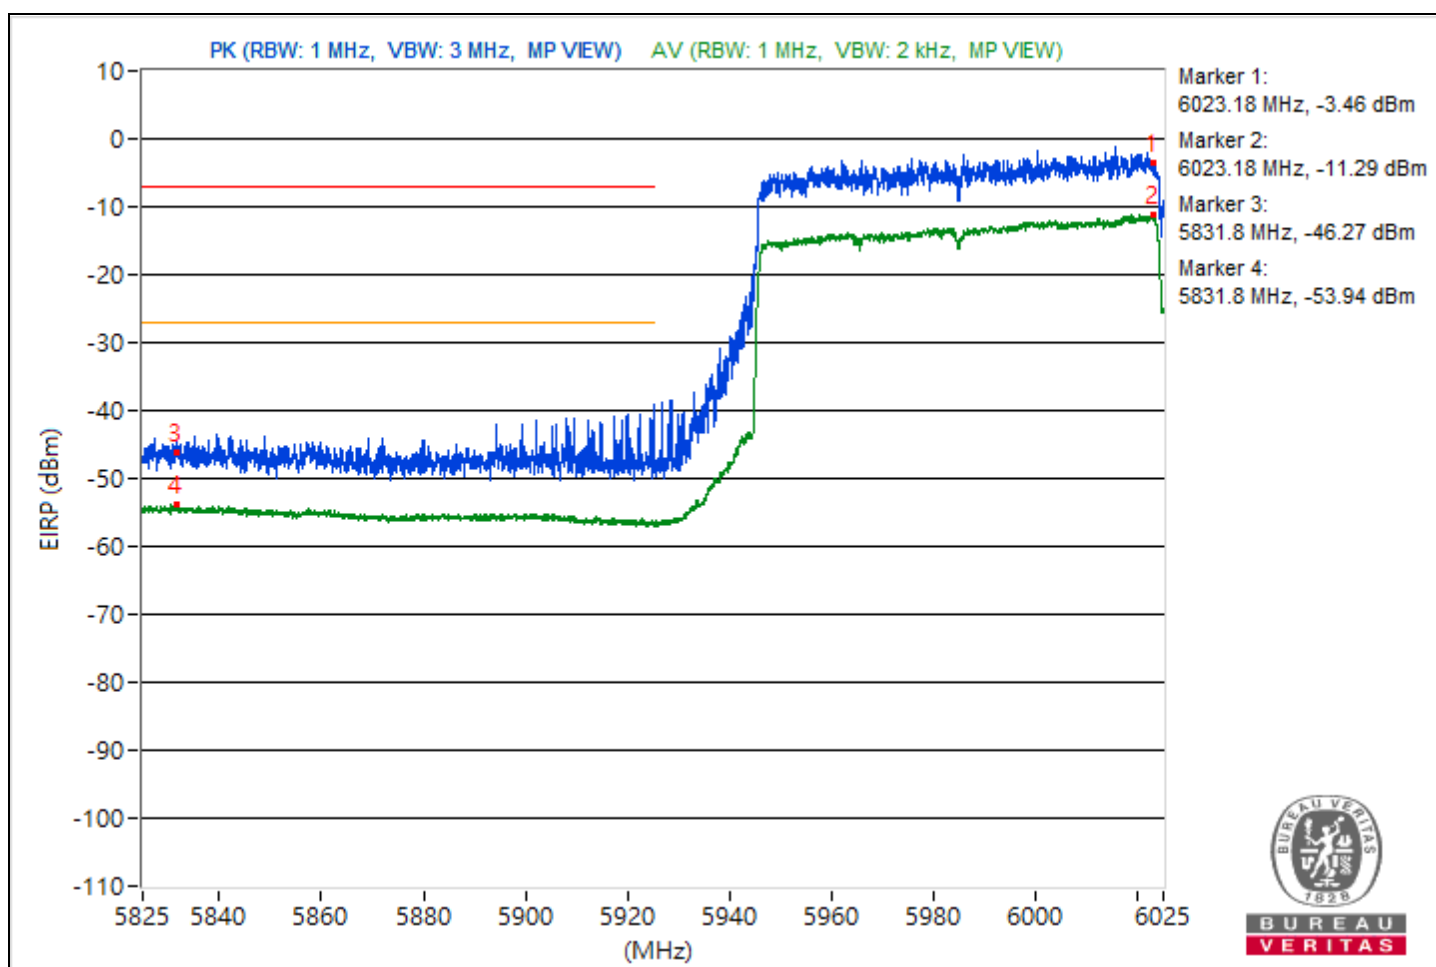


|                          |                             |             |                 |
|--------------------------|-----------------------------|-------------|-----------------|
| RF Mode                  | 802.11be (EHT20) 26-tone RU | Channel     | CH 2 : 5935 MHz |
| Frequency Range          | 5.825 GHz ~ 6.025 GHz       | Input Power | 3.3 Vdc         |
| Environmental Conditions | 25°C, 60% RH                | Tested By   | Dolly Chung     |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5926.52        | 89.72 PK                |                |             | -16.52                  | -16.89                  | 8.15                   | -5.54            |
| 2                   | *5926.52        | 79.92 AV                |                |             | -26.73                  | -26.29                  | 8.15                   | -15.34           |
| 3                   | #5924.98        | 80.28 PK                | 88.26          | -7.98       | -27.54                  | -25.08                  | 8.15                   | -14.98           |
| 4                   | #5924.98        | 68.1 AV                 | 68.26          | -0.16       | -38.51                  | -38.14                  | 8.15                   | -27.16           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

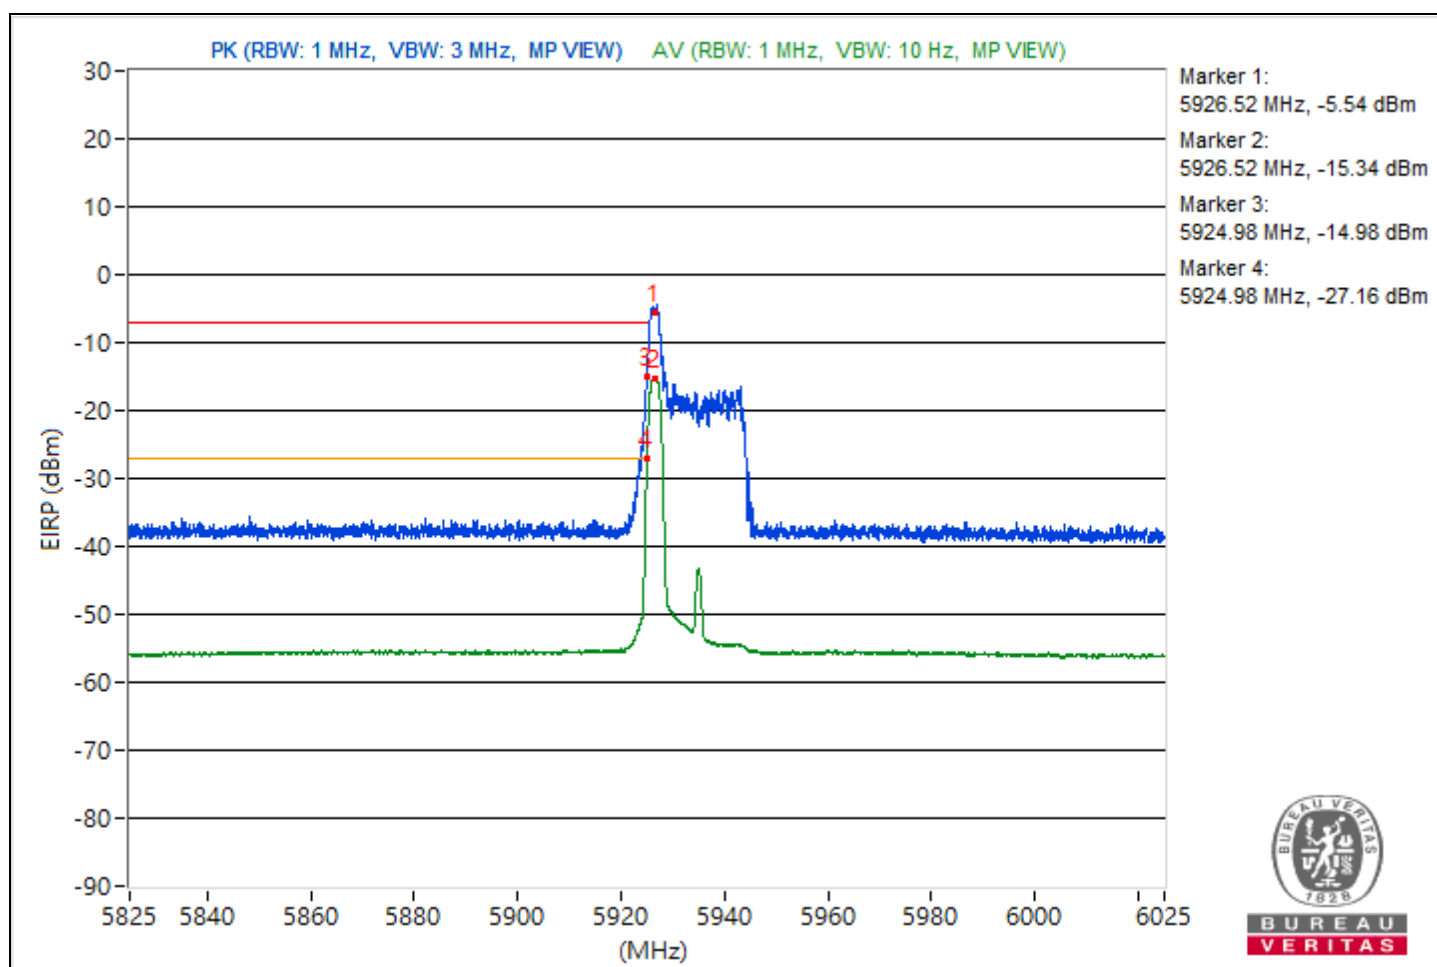




|                          |                             |             |                 |
|--------------------------|-----------------------------|-------------|-----------------|
| RF Mode                  | 802.11be (EHT20) 26-tone RU | Channel     | CH 1 : 5955 MHz |
| Frequency Range          | 5.825 GHz ~ 6.025 GHz       | Input Power | 3.3 Vdc         |
| Environmental Conditions | 25°C, 60% RH                | Tested By   | Dolly Chung     |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5946.5         | 95.86 PK                |                |             | -10.52                  | -10.6                   | 8.15                   | 0.6              |
| 2                   | *5946.5         | 86.43 AV                |                |             | -20.18                  | -19.81                  | 8.15                   | -8.83            |
| 3                   | #5825           | 56.28 PK                | 88.26          | -31.98      | -50.11                  | -50.17                  | 8.15                   | -38.98           |
| 4                   | #5825           | 40.62 AV                | 68.26          | -27.64      | -67.85                  | -64.42                  | 8.15                   | -54.64           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

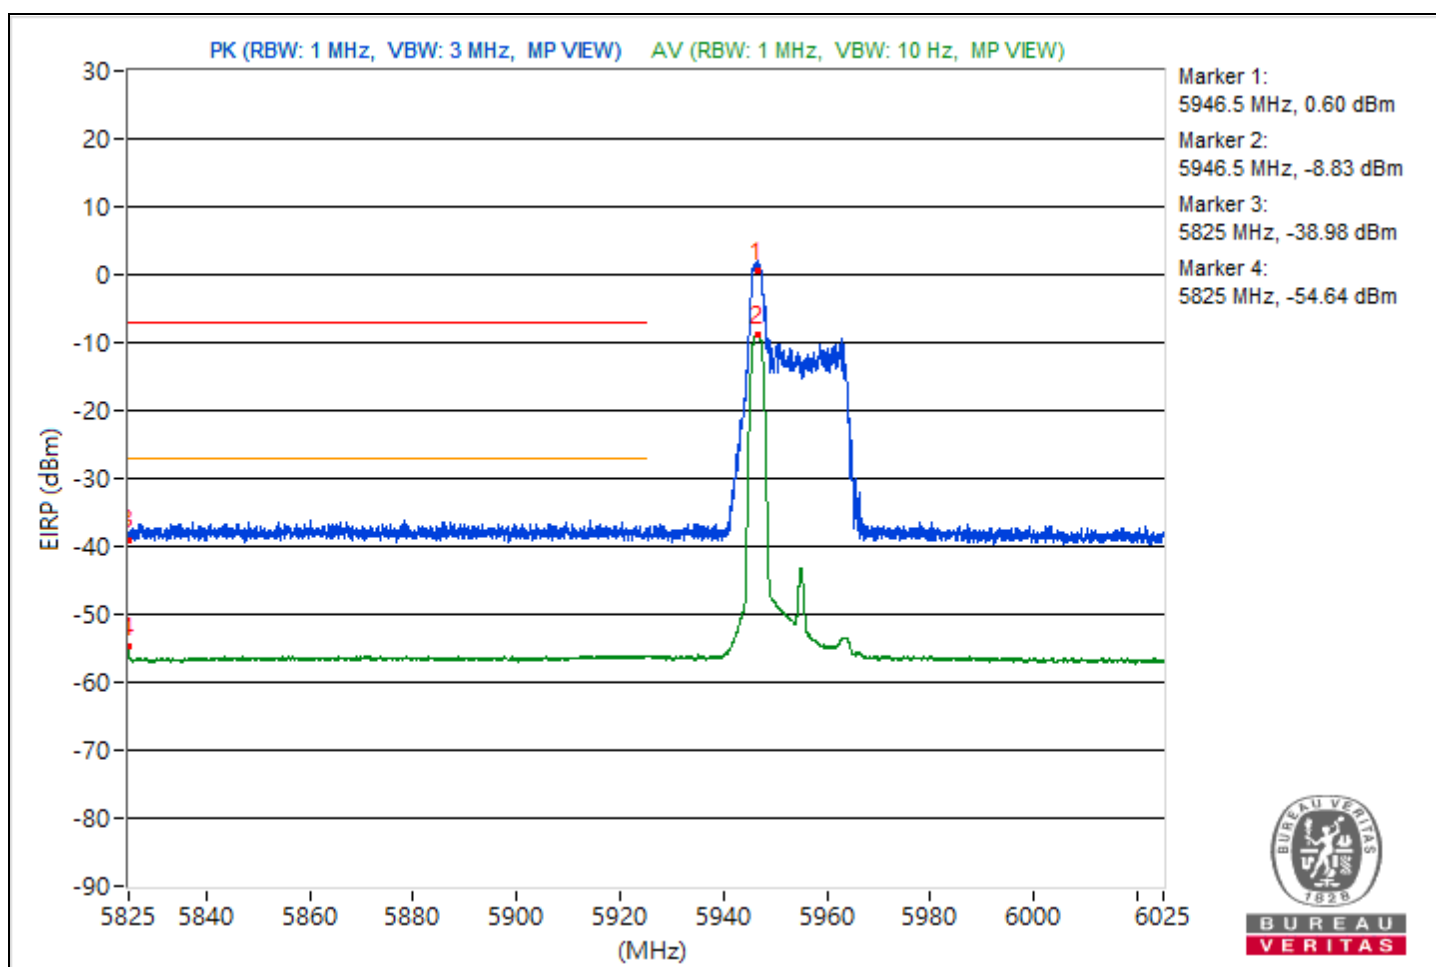


|                          |                             |             |                   |
|--------------------------|-----------------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT20) 26-tone RU | Channel     | CH 181 : 6855 MHz |
| Frequency Range          | 6.7 GHz ~ 7.225 GHz         | Input Power | 3.3 Vdc           |
| Environmental Conditions | 25°C, 60% RH                | Tested By   | Dolly Chung       |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6863.21        | 96.52 PK                |                |             | -9.84                   | -10.01                  | 8.17                   | 1.26             |
| 2                   | *6863.21        | 85.85 AV                |                |             | -21.08                  | -20.14                  | 8.17                   | -9.41            |
| 3                   | #7199.6         | 47.45 PK                | 88.26          | -40.81      | -58.61                  | -59.4                   | 8.17                   | -47.81           |
| 4                   | #7199.6         | 31.55 AV                | 68.26          | -36.71      | -74.64                  | -75.16                  | 8.17                   | -63.71           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

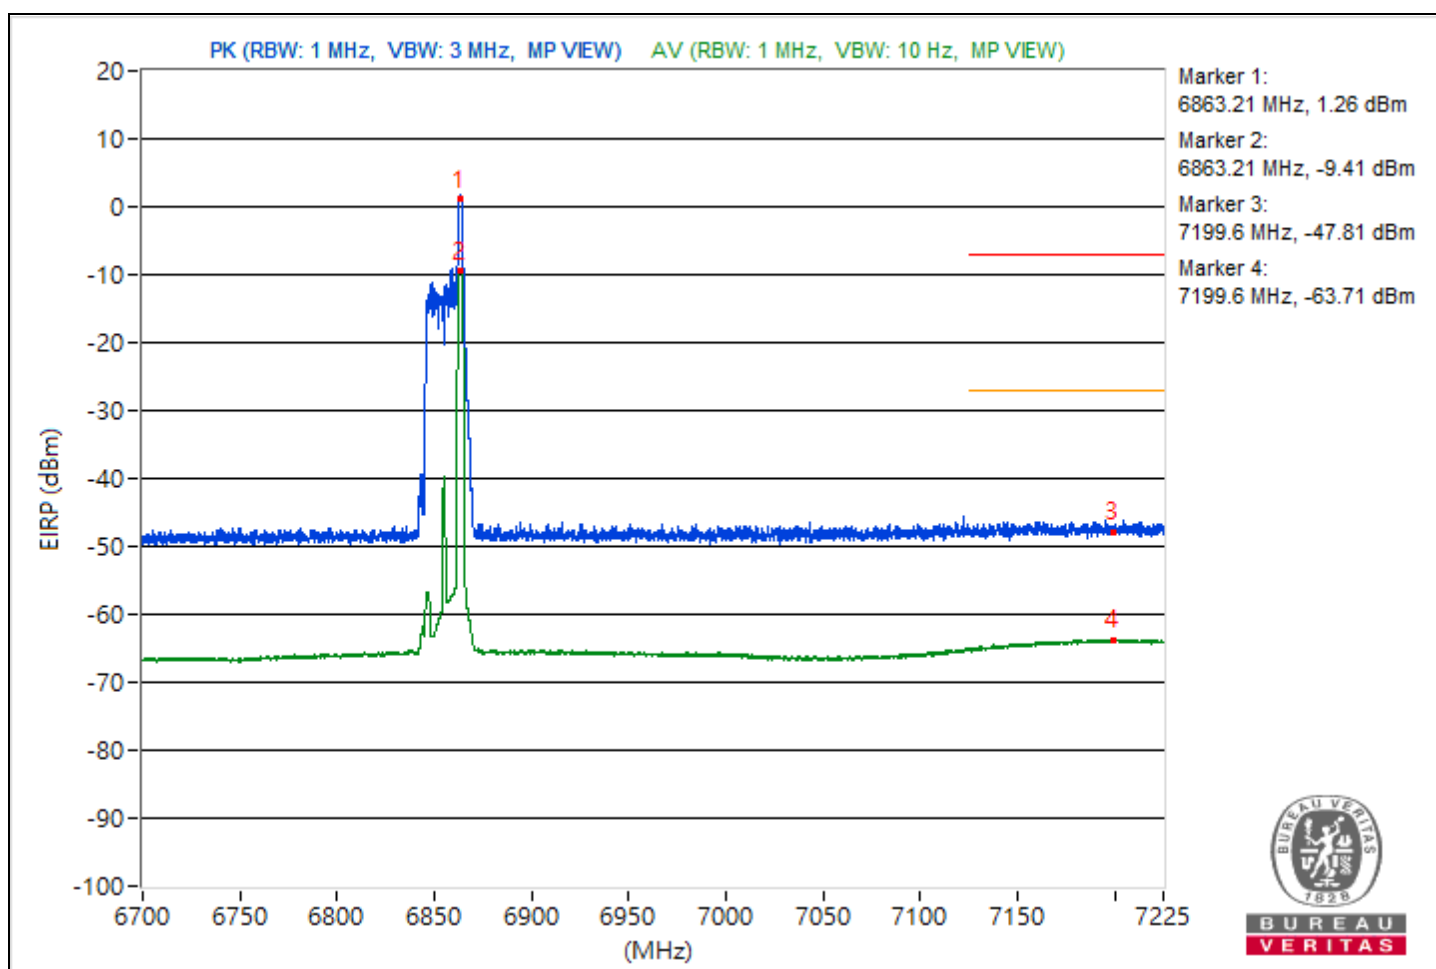


|                          |                             |             |                 |
|--------------------------|-----------------------------|-------------|-----------------|
| RF Mode                  | 802.11be (EHT20) 52-tone RU | Channel     | CH 2 : 5935 MHz |
| Frequency Range          | 5.825 GHz ~ 6.025 GHz       | Input Power | 3.3 Vdc         |
| Environmental Conditions | 25°C, 60% RH                | Tested By   | Dolly Chung     |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5927.65        | 89.68 PK                |                |             | -16.96                  | -16.53                  | 8.15                   | -5.58            |
| 2                   | *5927.65        | 80.12 AV                |                |             | -26.49                  | -26.12                  | 8.15                   | -15.14           |
| 3                   | #5924.98        | 81.88 PK                | 88.26          | -6.38       | -24.48                  | -24.59                  | 8.15                   | -13.38           |
| 4                   | #5924.98        | 68.03 AV                | 68.26          | -0.23       | -38.6                   | -38.18                  | 8.15                   | -27.23           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

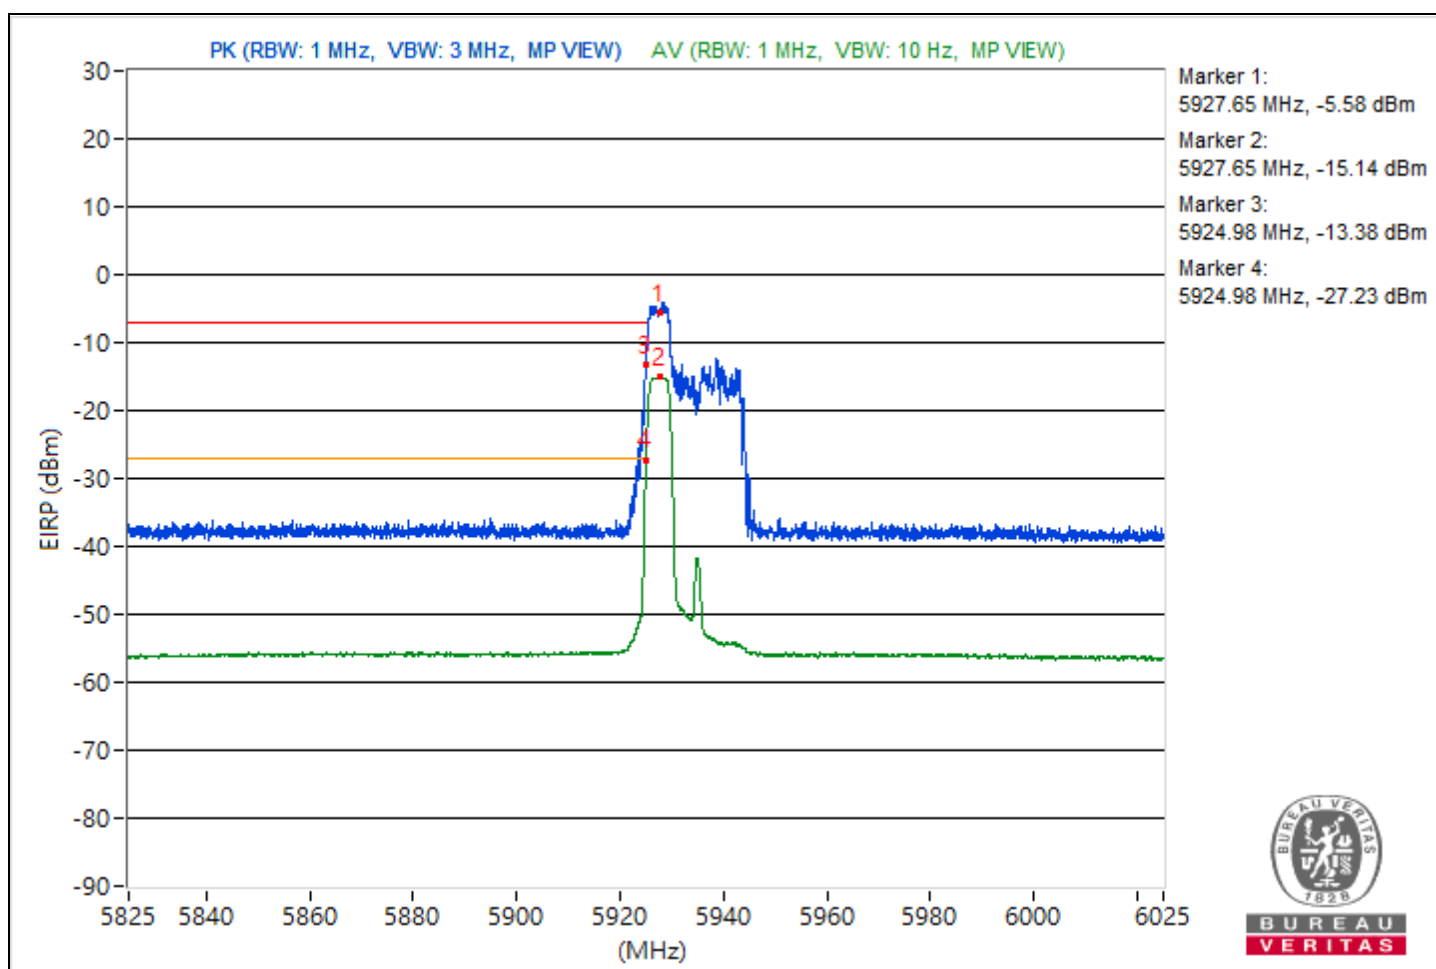


|                          |                             |             |                 |
|--------------------------|-----------------------------|-------------|-----------------|
| RF Mode                  | 802.11be (EHT20) 52-tone RU | Channel     | CH 1 : 5955 MHz |
| Frequency Range          | 5.825 GHz ~ 6.025 GHz       | Input Power | 3.3 Vdc         |
| Environmental Conditions | 25°C, 60% RH                | Tested By   | Dolly Chung     |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5947.55        | 95.94 PK                |                |             | -10.44                  | -10.53                  | 8.15                   | 0.68             |
| 2                   | *5947.55        | 86.53 AV                |                |             | -20.15                  | -19.65                  | 8.15                   | -8.73            |
| 3                   | #5920.6         | 57.41 PK                | 88.26          | -30.85      | -49.37                  | -48.67                  | 8.15                   | -37.85           |
| 4                   | #5920.6         | 39.16 AV                | 68.26          | -29.1       | -67.28                  | -67.25                  | 8.15                   | -56.1            |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

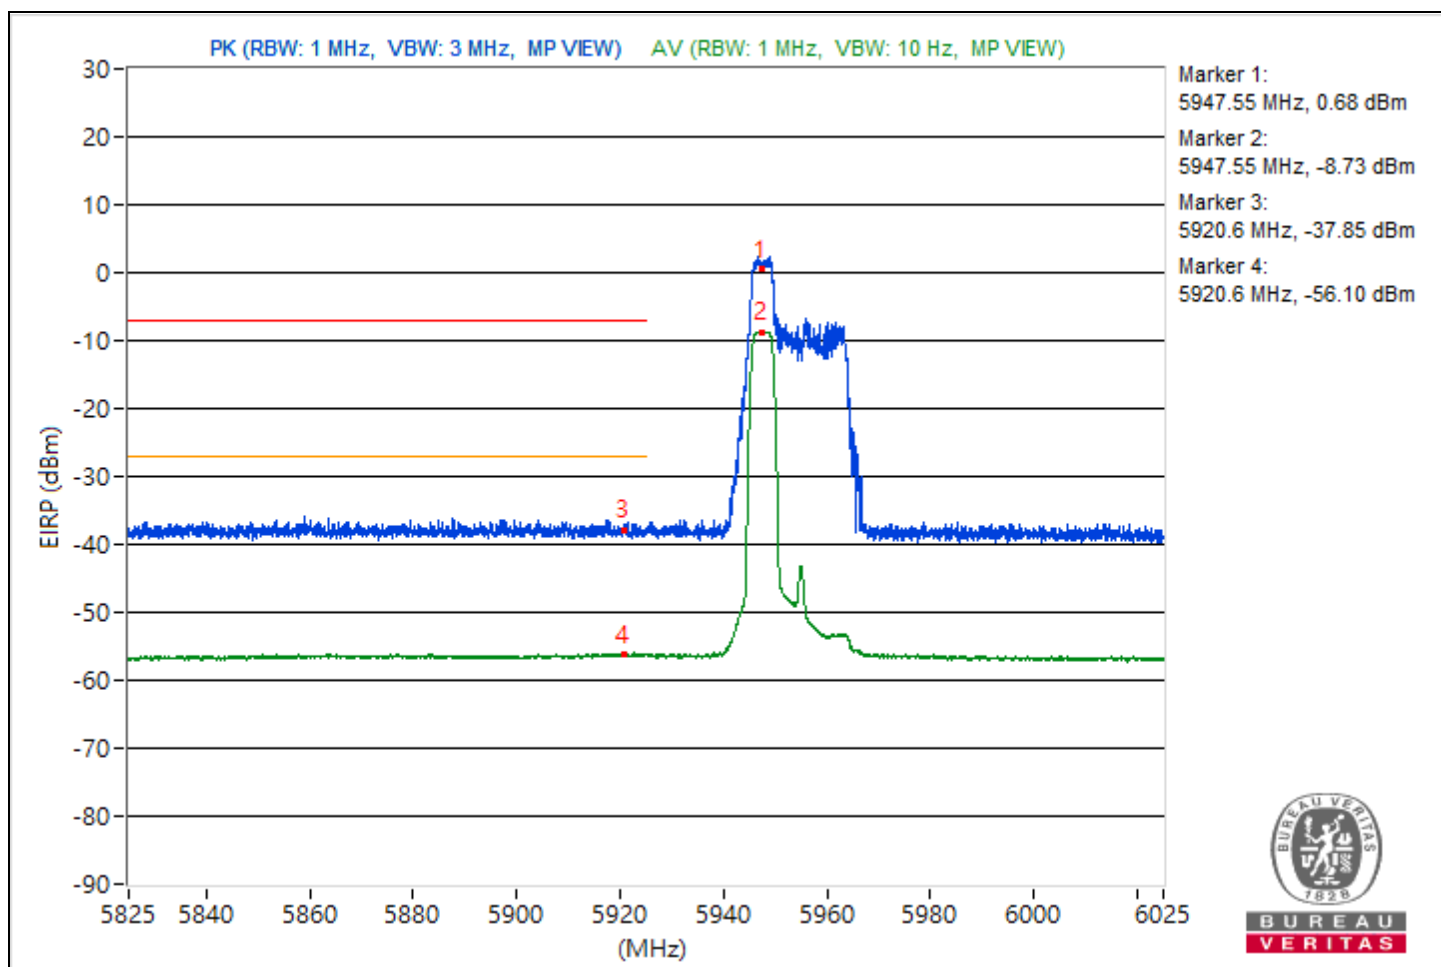


|                          |                             |             |                   |
|--------------------------|-----------------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT20) 52-tone RU | Channel     | CH 181 : 6855 MHz |
| Frequency Range          | 6.7 GHz ~ 7.225 GHz         | Input Power | 3.3 Vdc           |
| Environmental Conditions | 25°C, 60% RH                | Tested By   | Dolly Chung       |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6862.16        | 96.41 PK                |                |             | -10.99                  | -9.24                   | 8.17                   | 1.15             |
| 2                   | *6862.16        | 86.04 AV                |                |             | -21.04                  | -19.85                  | 8.17                   | -9.22            |
| 3                   | #7203.15        | 47.48 PK                | 88.26          | -40.78      | -58.7                   | -59.24                  | 8.17                   | -47.78           |
| 4                   | #7203.15        | 31.51 AV                | 68.26          | -36.75      | -74.96                  | -74.89                  | 8.17                   | -63.75           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

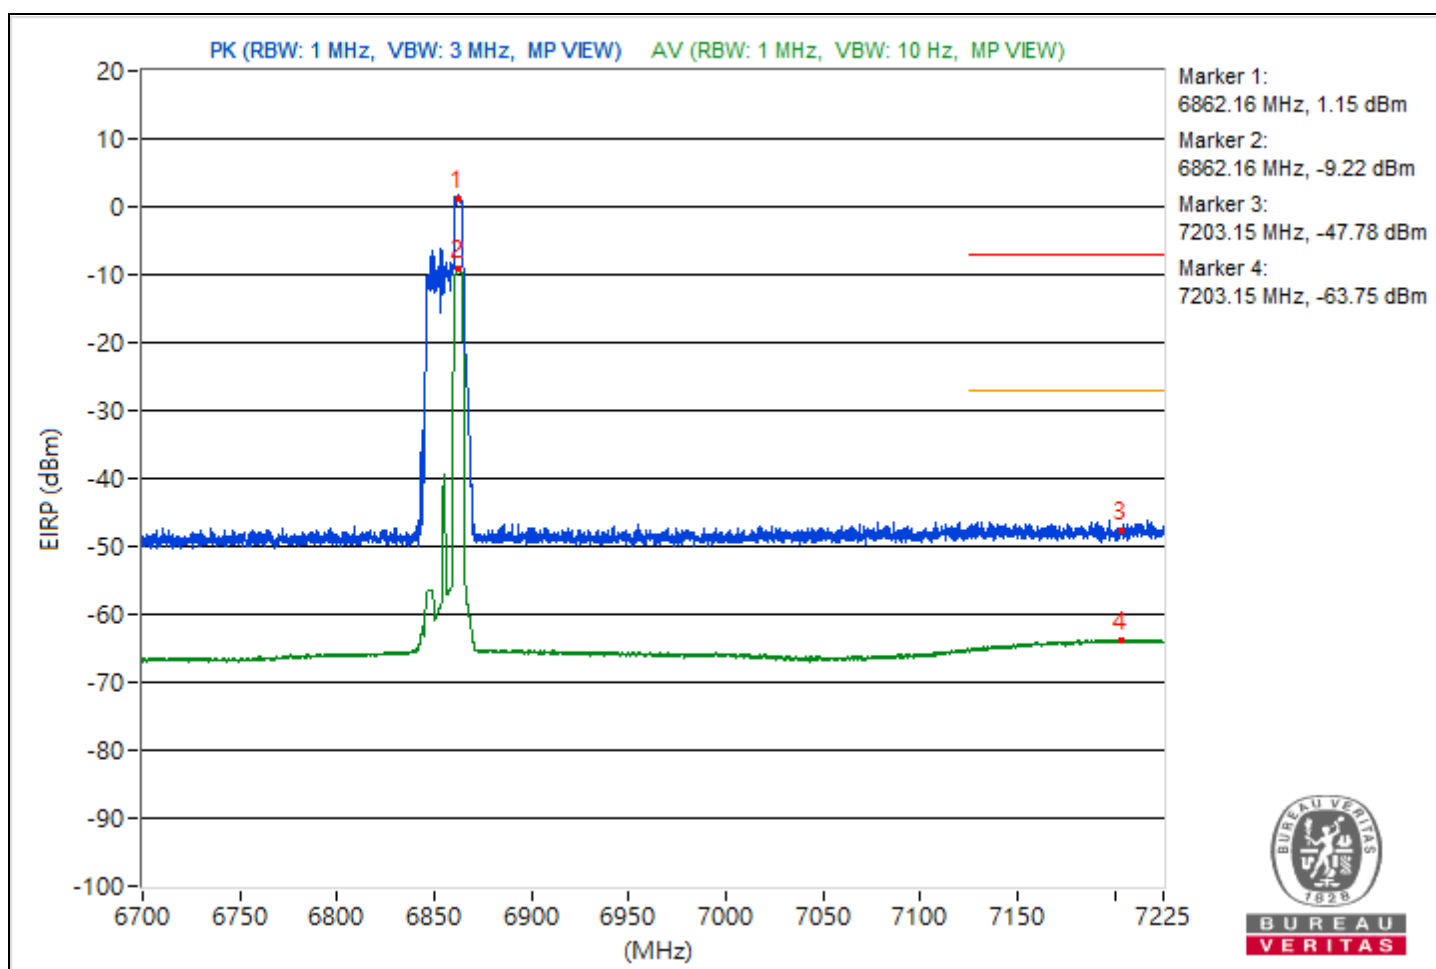


|                          |                              |             |                 |
|--------------------------|------------------------------|-------------|-----------------|
| RF Mode                  | 802.11be (EHT20) 106-tone RU | Channel     | CH 2 : 5935 MHz |
| Frequency Range          | 5.825 GHz ~ 6.025 GHz        | Input Power | 3.3 Vdc         |
| Environmental Conditions | 25°C, 60% RH                 | Tested By   | Dolly Chung     |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5926.57        | 88.05 PK                |                |             | -18.28                  | -18.46                  | 8.15                   | -7.21            |
| 2                   | *5926.57        | 78.32 AV                |                |             | -27.95                  | -28.25                  | 8.15                   | -16.94           |
| 3                   | #5924.98        | 79.67 PK                | 88.26          | -8.59       | -26.73                  | -26.78                  | 8.15                   | -15.59           |
| 4                   | #5924.98        | 68.09 AV                | 68.26          | -0.17       | -38.15                  | -38.52                  | 8.15                   | -27.17           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

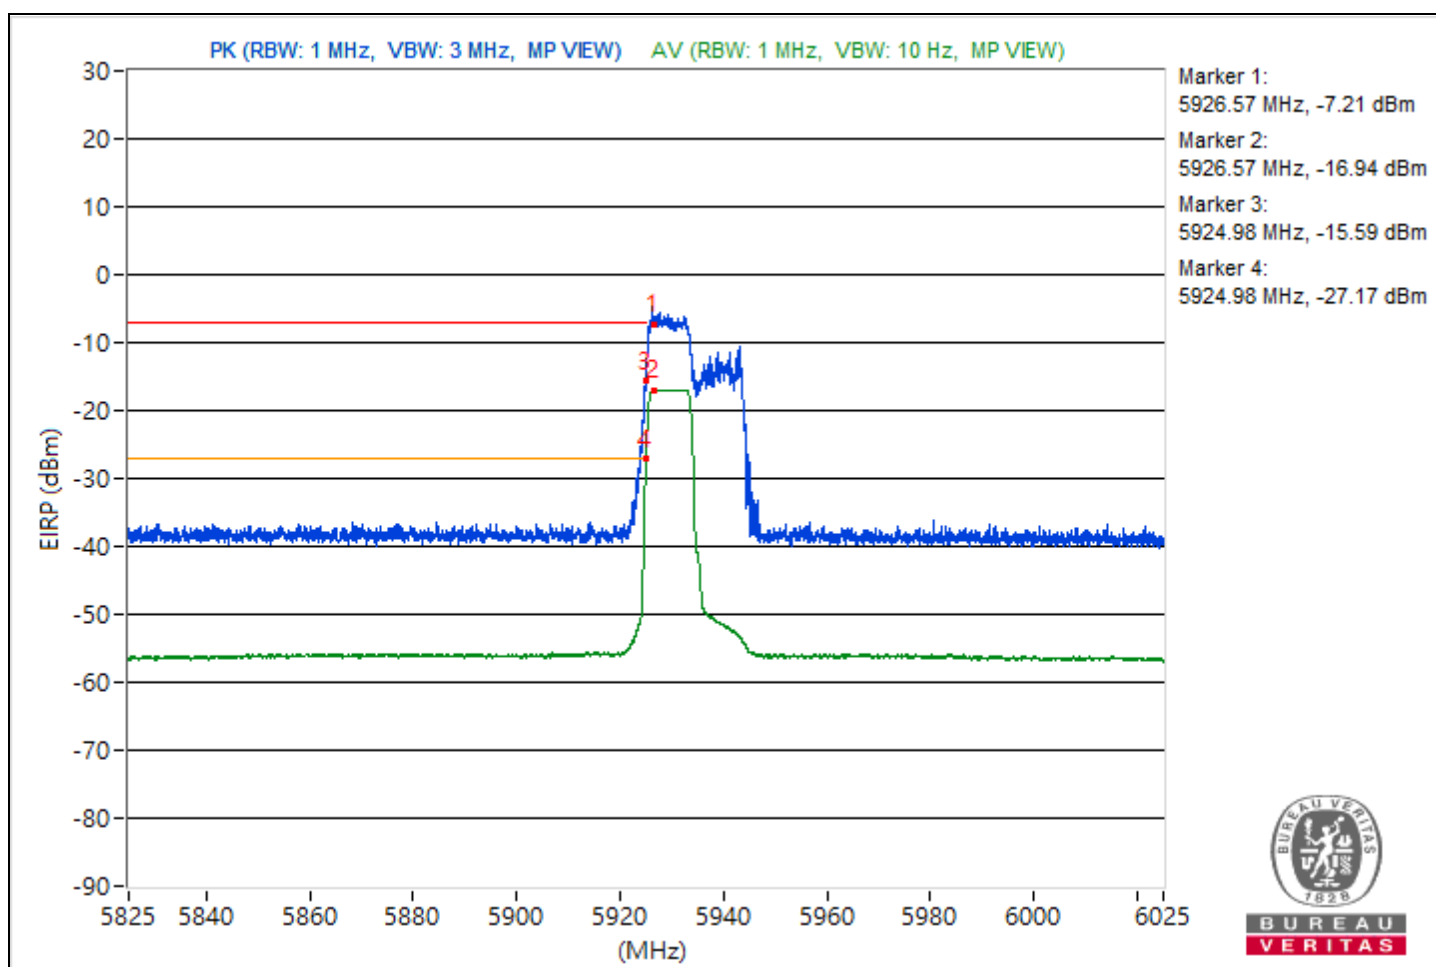


|                          |                              |             |                 |
|--------------------------|------------------------------|-------------|-----------------|
| RF Mode                  | 802.11be (EHT20) 106-tone RU | Channel     | CH 1 : 5955 MHz |
| Frequency Range          | 5.825 GHz ~ 6.025 GHz        | Input Power | 3.3 Vdc         |
| Environmental Conditions | 25°C, 60% RH                 | Tested By   | Dolly Chung     |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5948.7         | 95.98 PK                |                |             | -10.33                  | -10.56                  | 8.15                   | 0.72             |
| 2                   | *5948.7         | 86.74 AV                |                |             | -19.86                  | -19.5                   | 8.15                   | -8.52            |
| 3                   | #5923.77        | 56.85 PK                | 88.26          | -31.41      | -49.32                  | -49.84                  | 8.15                   | -38.41           |
| 4                   | #5923.77        | 39.13 AV                | 68.26          | -29.13      | -67.28                  | -67.31                  | 8.15                   | -56.13           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

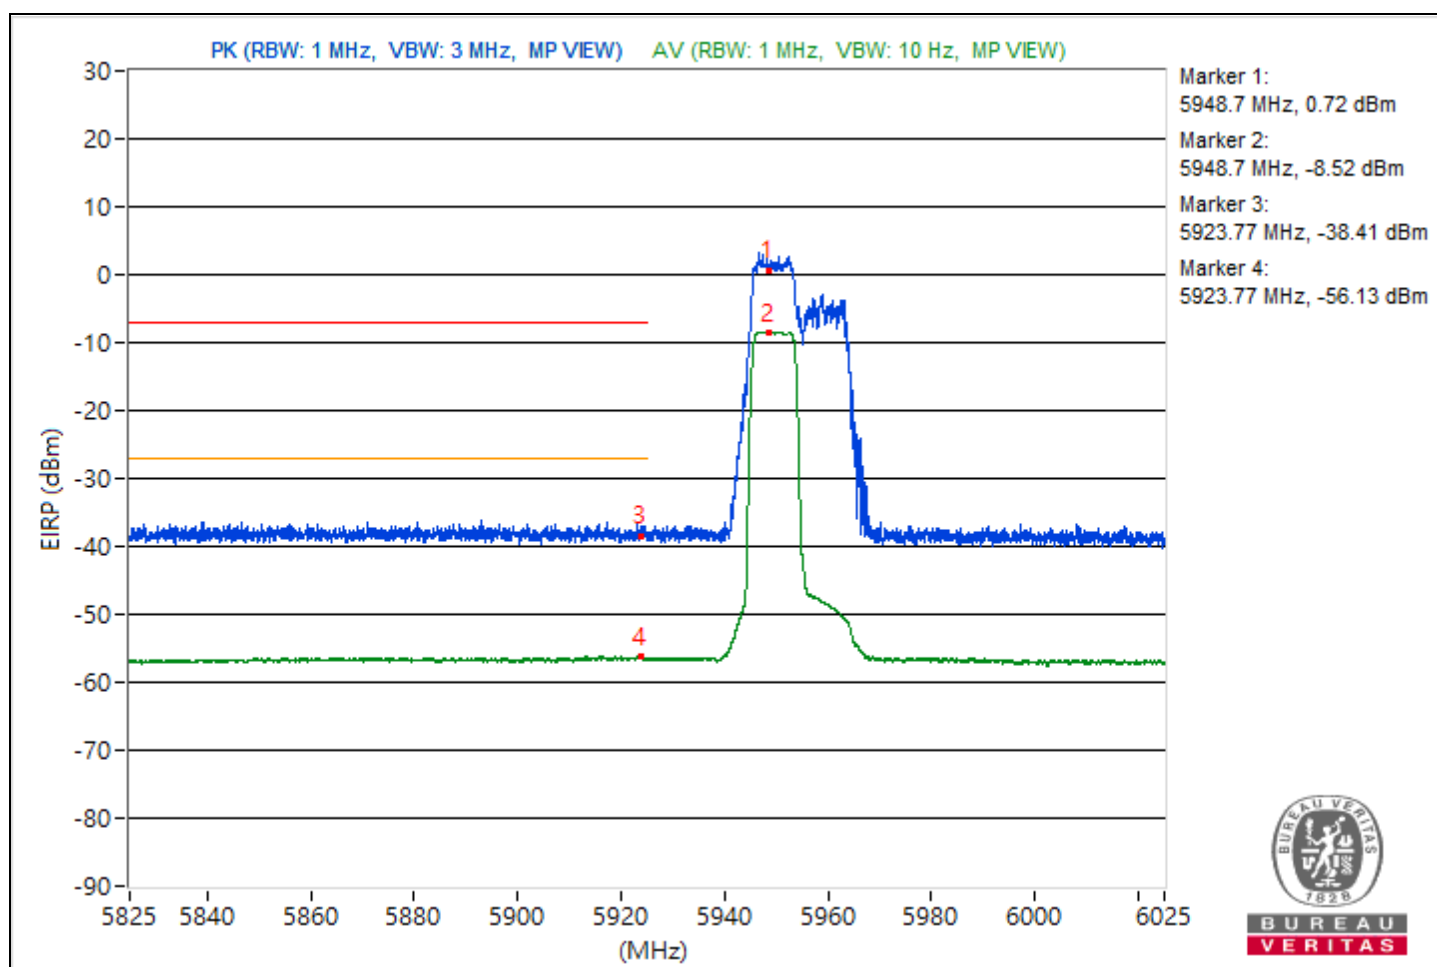


|                          |                              |             |                   |
|--------------------------|------------------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT20) 106-tone RU | Channel     | CH 181 : 6855 MHz |
| Frequency Range          | 6.7 GHz ~ 7.225 GHz          | Input Power | 3.3 Vdc           |
| Environmental Conditions | 25°C, 60% RH                 | Tested By   | Dolly Chung       |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6857.57        | 97.75 PK                |                |             | -8.68                   | -8.71                   | 8.17                   | 2.49             |
| 2                   | *6857.57        | 86.3 AV                 |                |             | -20.8                   | -19.57                  | 8.17                   | -8.96            |
| 3                   | #7184.84        | 47.51 PK                | 88.26          | -40.75      | -58.86                  | -59                     | 8.17                   | -47.75           |
| 4                   | #7184.84        | 31.57 AV                | 68.26          | -36.69      | -74.43                  | -75.37                  | 8.17                   | -63.69           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

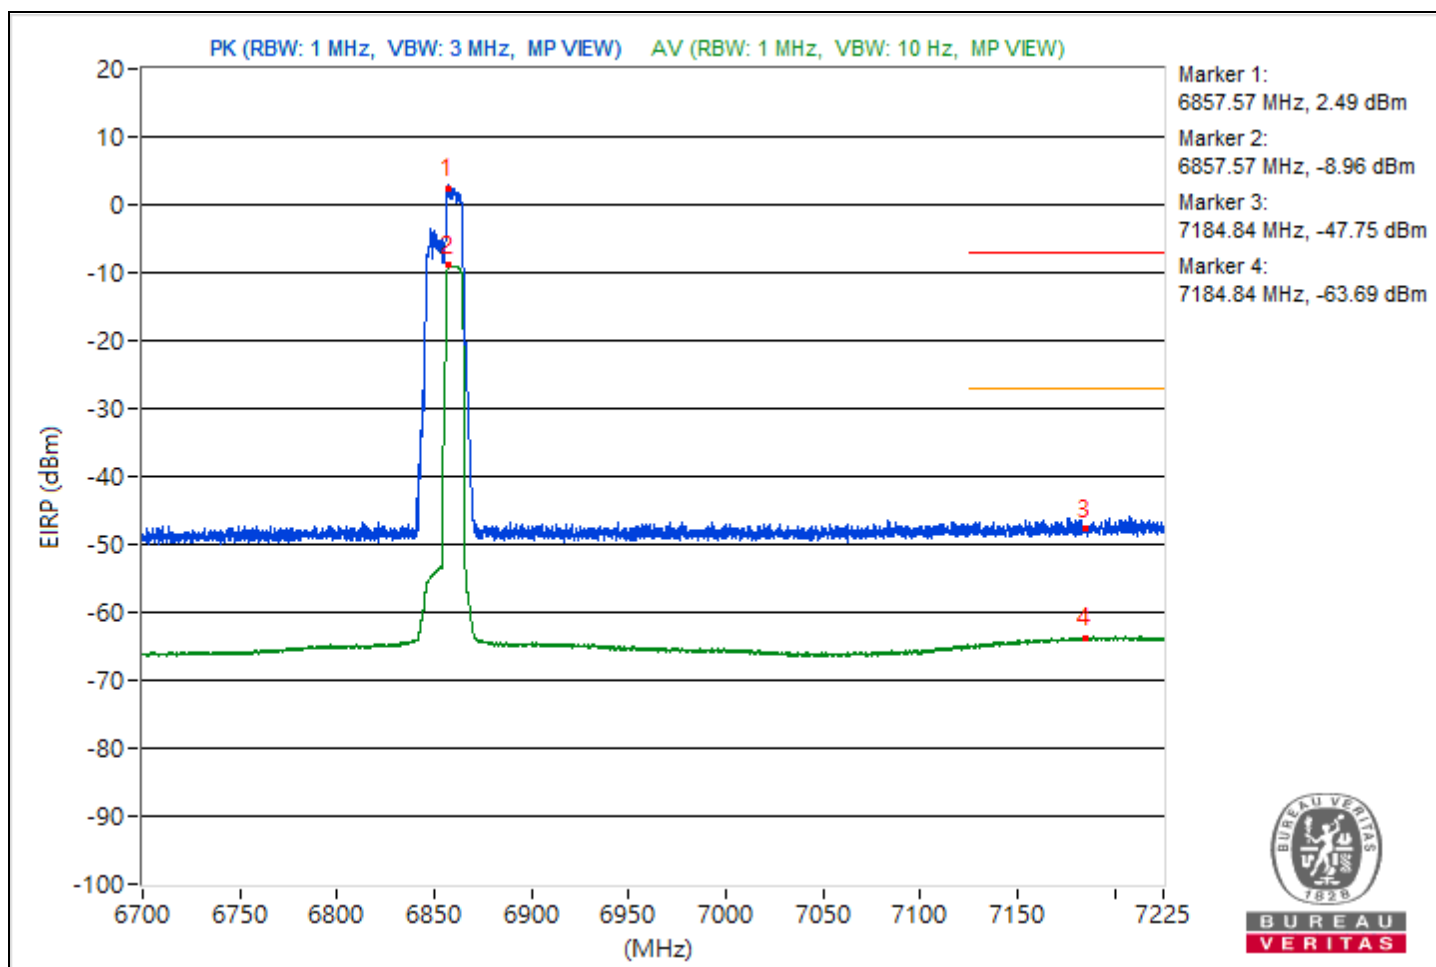




|                          |                                      |             |                 |
|--------------------------|--------------------------------------|-------------|-----------------|
| RF Mode                  | 802.11be (EHT80) Punctured by 20 MHz | Channel     | CH 7 : 5985 MHz |
| Frequency Range          | 5.825 GHz ~ 6.025 GHz                | Input Power | 3.3 Vdc         |
| Environmental Conditions | 24°C, 62% RH                         | Tested By   | JyunChun.Lin    |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *5982.7         | 96.54 PK                |                |             | -10.69                  | -9.2                    | 8.15                   | 1.28             |
| 2                   | *5982.7         | 87.36 AV                |                |             | -19.43                  | -18.71                  | 8.15                   | -7.9             |
| 3                   | #5921.43        | 48.09 PK                | 88.26          | -40.17      | -58.8                   | -57.9                   | 8.15                   | -47.17           |
| 4                   | #5921.43        | 35.15 AV                | 68.26          | -33.11      | -71.18                  | -71.37                  | 8.15                   | -60.11           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

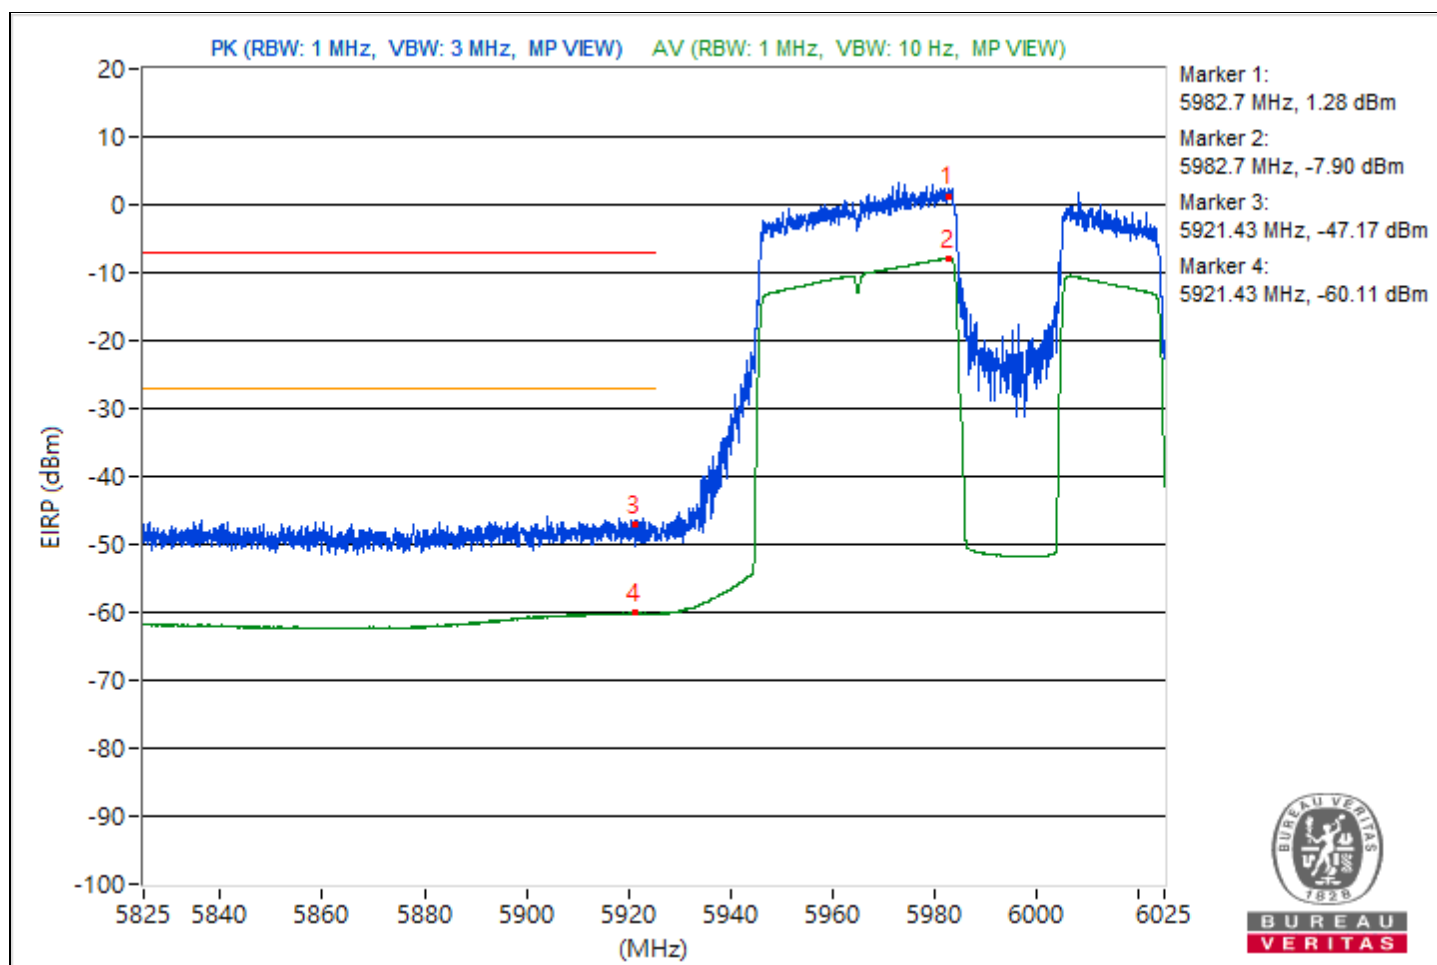


|                          |                                      |             |                   |
|--------------------------|--------------------------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT80) Punctured by 20 MHz | Channel     | CH 135 : 6625 MHz |
| Frequency Range          | 6.575 GHz ~ 7.675 GHz                | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 62% RH                         | Tested By   | JyunChun.LIn      |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6622.57        | 96.15 PK                |                |             | -11.24                  | -9.52                   | 8.17                   | 0.89             |
| 2                   | *6622.57        | 87.04 AV                |                |             | -19.83                  | -19.02                  | 8.17                   | -8.22            |
| 3                   | #7181.93        | 47.17 PK                | 88.26          | -41.09      | -58.58                  | -60.09                  | 8.17                   | -48.09           |
| 4                   | #7181.93        | 33.07 AV                | 68.26          | -35.19      | -72.96                  | -73.83                  | 8.17                   | -62.19           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

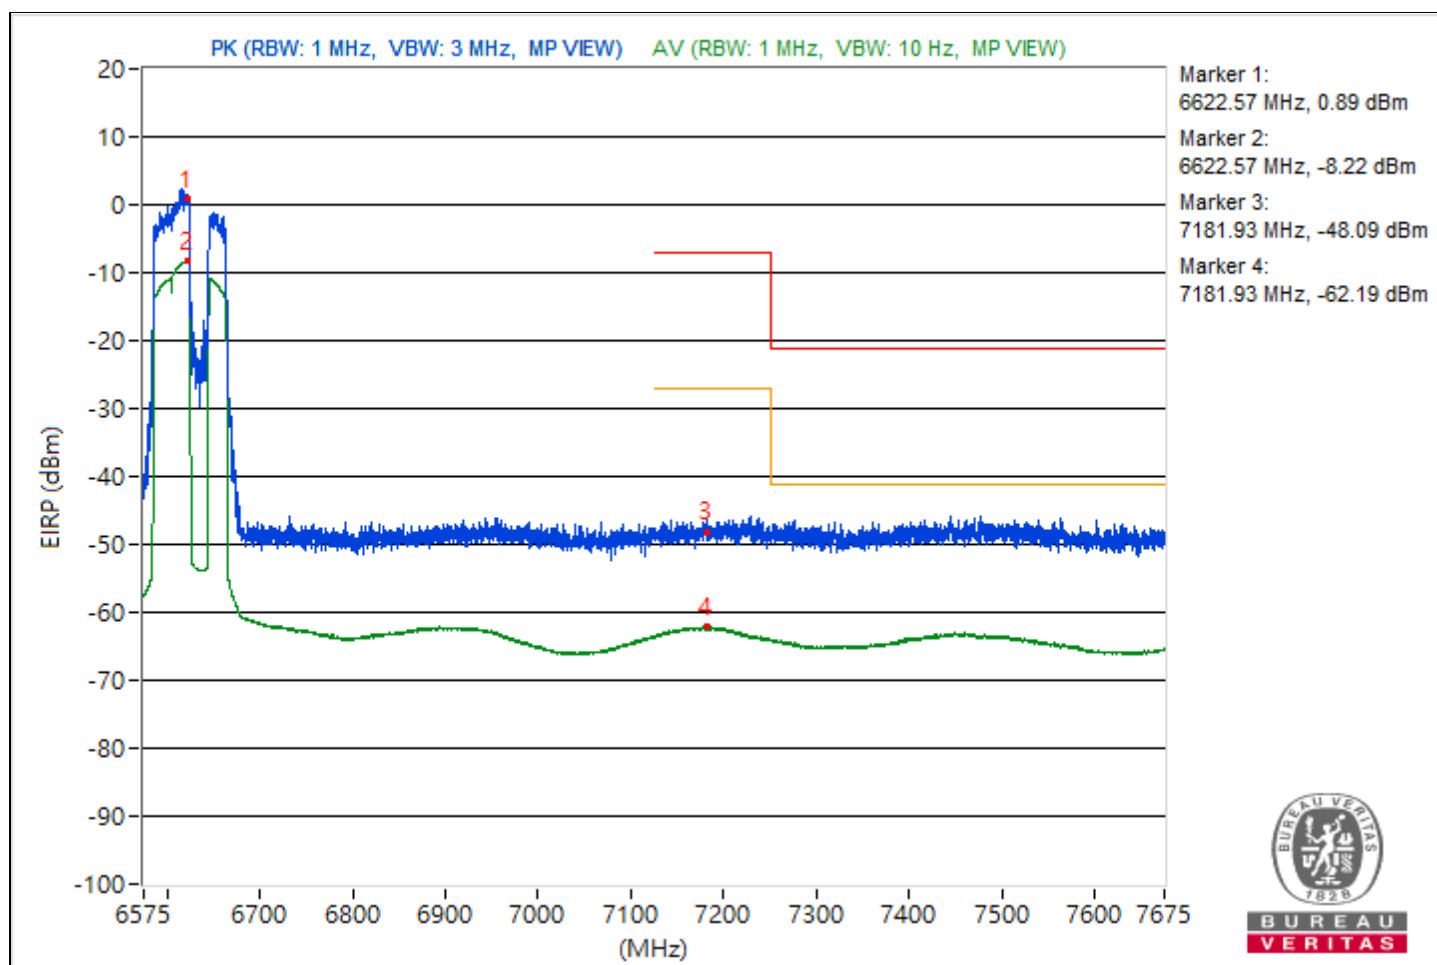


|                          |                                       |             |                  |
|--------------------------|---------------------------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT160) Punctured by 20 MHz | Channel     | CH 15 : 6025 MHz |
| Frequency Range          | 5.825 GHz ~ 6.025 GHz                 | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 62% RH                          | Tested By   | JyunChun.Lin     |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6022.52        | 96.69 PK                |                |             | -10.68                  | -8.95                   | 8.15                   | 1.43             |
| 2                   | *6022.52        | 87.03 AV                |                |             | -19.81                  | -19.01                  | 8.15                   | -8.23            |
| 3                   | #5923.85        | 48.01 PK                | 88.26          | -40.25      | -59.53                  | -57.53                  | 8.15                   | -47.25           |
| 4                   | #5923.85        | 37.12 AV                | 68.26          | -31.14      | -70.18                  | -68.56                  | 8.15                   | -58.14           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

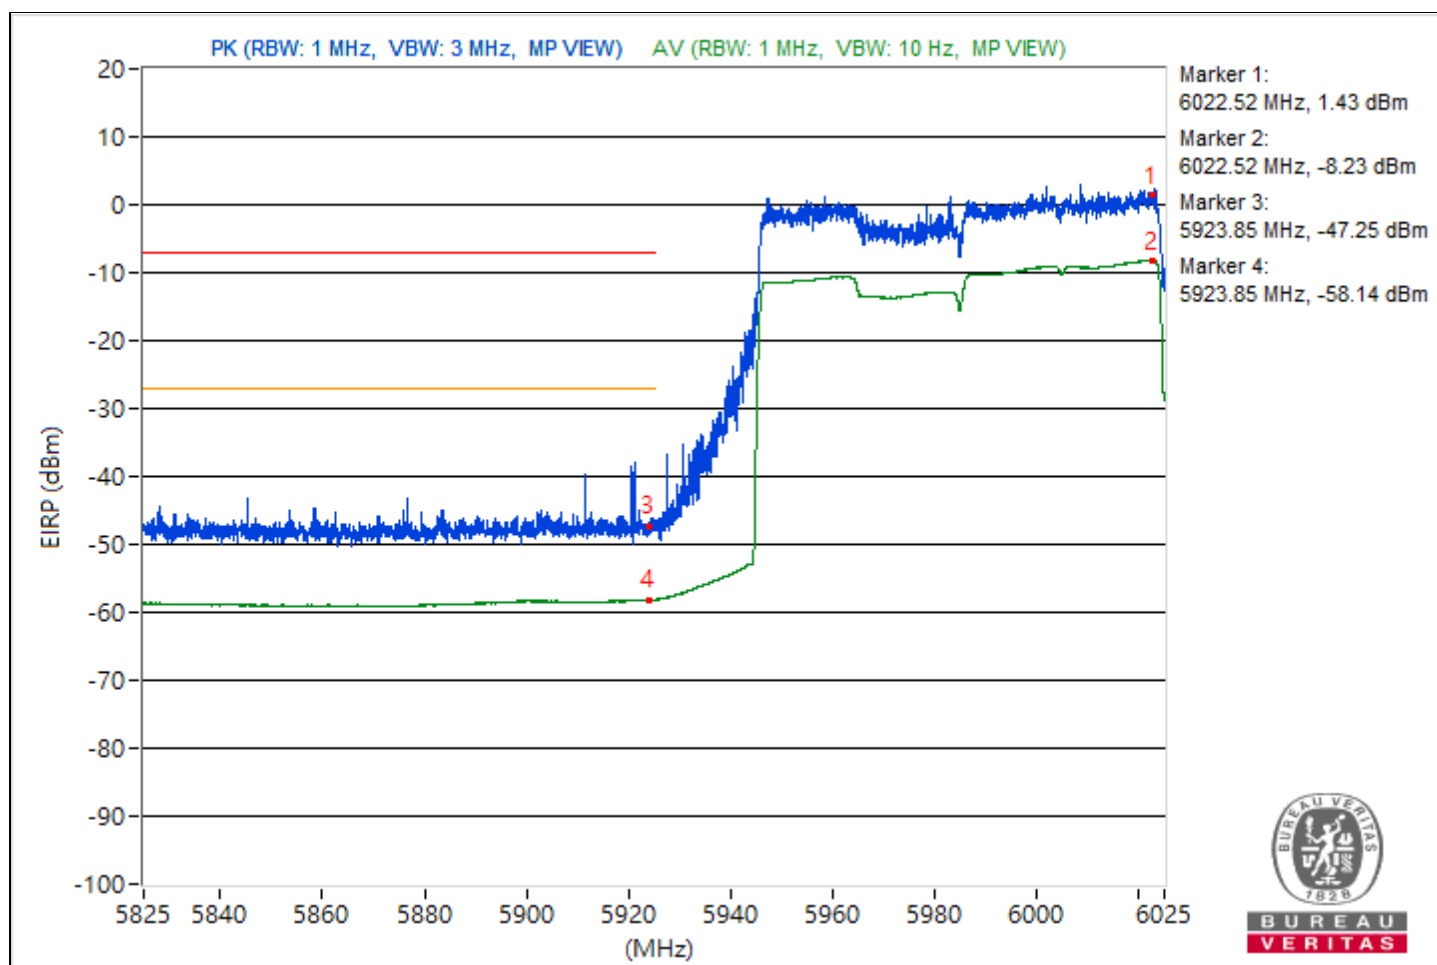


|                          |                                       |             |                   |
|--------------------------|---------------------------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT160) Punctured by 20 MHz | Channel     | CH 143 : 6665 MHz |
| Frequency Range          | 6.575 GHz ~ 7.675 GHz                 | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 62% RH                          | Tested By   | JyunChun.LIn      |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6657.64        | 97.85 PK                |                |             | -7.59                   | -9.89                   | 8.17                   | 2.59             |
| 2                   | *6657.64        | 86.91 AV                |                |             | -19.63                  | -19.42                  | 8.17                   | -8.35            |
| 3                   | #7183.99        | 47.56 PK                | 88.26          | -40.7       | -58.66                  | -59.1                   | 8.17                   | -47.7            |
| 4                   | #7183.99        | 33.93 AV                | 68.26          | -34.33      | -72.19                  | -72.86                  | 8.17                   | -61.33           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

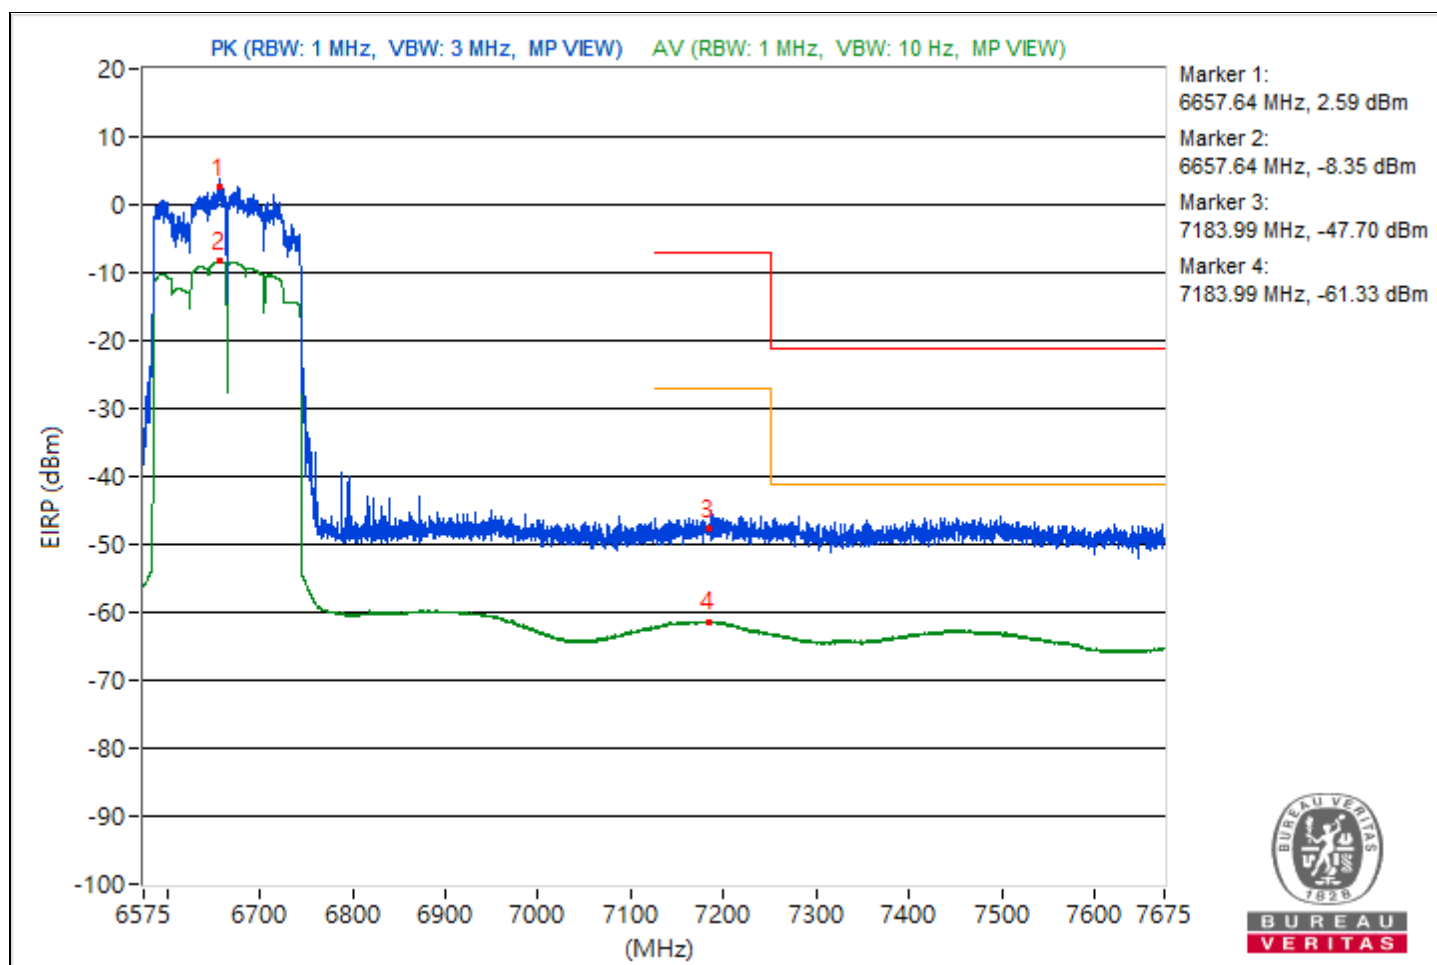


|                          |                                       |             |                  |
|--------------------------|---------------------------------------|-------------|------------------|
| RF Mode                  | 802.11be (EHT160) Punctured by 40 MHz | Channel     | CH 15 : 6025 MHz |
| Frequency Range          | 5.825 GHz ~ 6.025 GHz                 | Input Power | 3.3 Vdc          |
| Environmental Conditions | 24°C, 62% RH                          | Tested By   | JyunChun.Lin     |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6023           | 96.73 PK                |                |             | -9.25                   | -10.19                  | 8.15                   | 1.47             |
| 2                   | *6023           | 88.17 AV                |                |             | -18.82                  | -17.75                  | 8.15                   | -7.09            |
| 3                   | #5825           | 49.22 PK                | 88.26          | -39.04      | -58.35                  | -56.29                  | 8.15                   | -46.04           |
| 4                   | #5825           | 38.4 AV                 | 68.26          | -29.86      | -67                     | -69.35                  | 8.15                   | -56.86           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

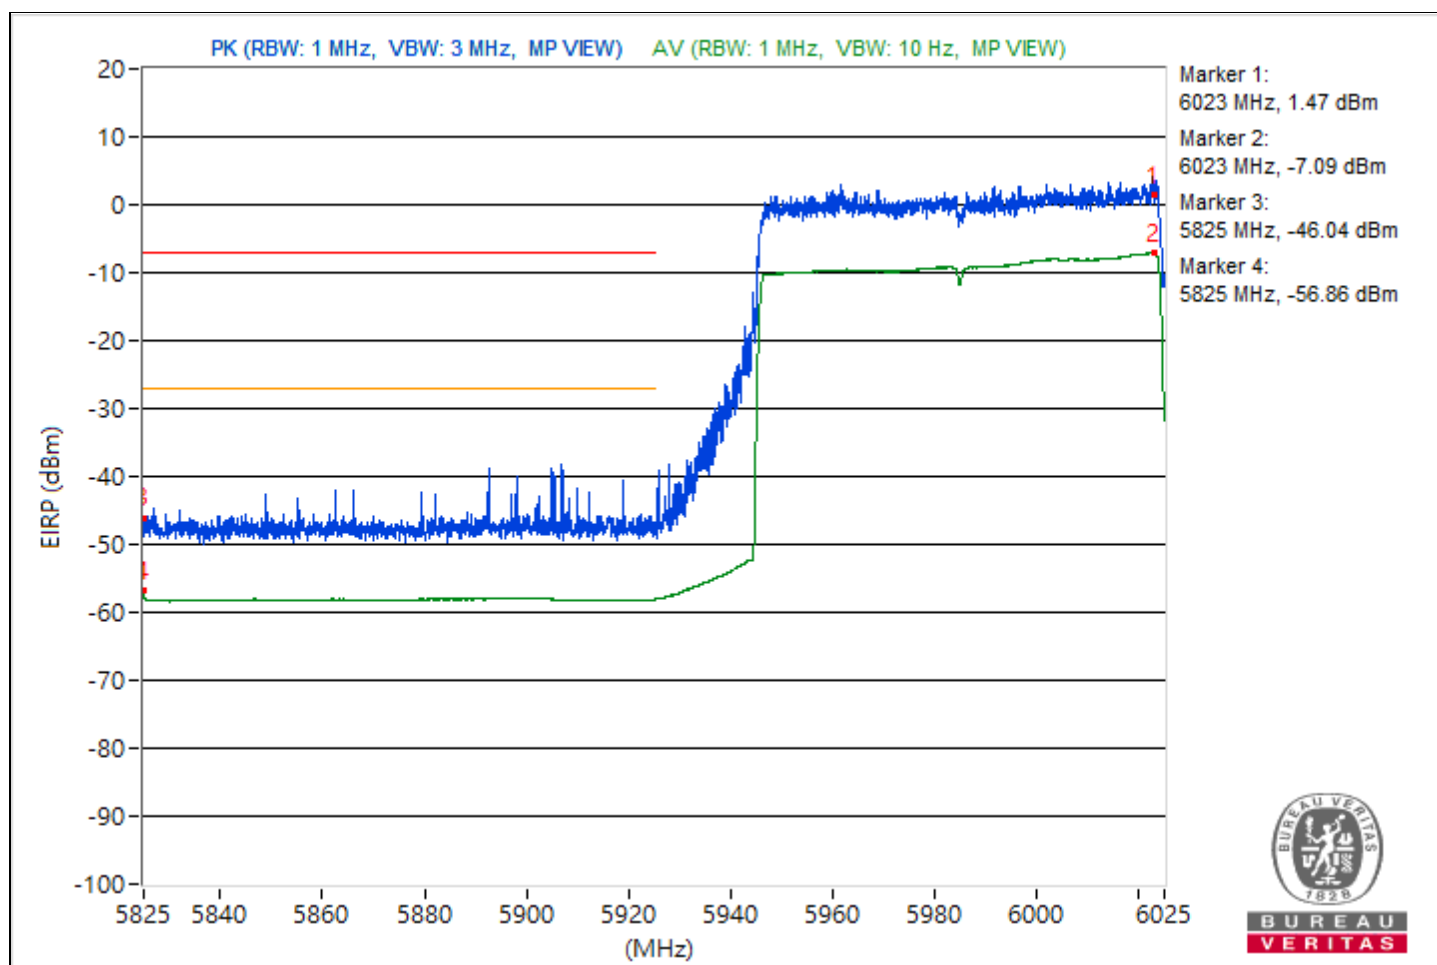


|                          |                                       |             |                   |
|--------------------------|---------------------------------------|-------------|-------------------|
| RF Mode                  | 802.11be (EHT160) Punctured by 40 MHz | Channel     | CH 143 : 6665 MHz |
| Frequency Range          | 6.575 GHz ~ 7.675 GHz                 | Input Power | 3.3 Vdc           |
| Environmental Conditions | 24°C, 62% RH                          | Tested By   | JyunChun.LIn      |

| Conducted Band Edge |                 |                         |                |             |                         |                         |                        |                  |
|---------------------|-----------------|-------------------------|----------------|-------------|-------------------------|-------------------------|------------------------|------------------|
| No.                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value Chain 0 (dBm) | Raw Value Chain 1 (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
| 1                   | *6653.51        | 96.61 PK                |                |             | -9.89                   | -9.77                   | 8.17                   | 1.35             |
| 2                   | *6653.51        | 87.95 AV                |                |             | -19.15                  | -17.93                  | 8.17                   | -7.31            |
| 3                   | #7167.35        | 46.77 PK                | 88.26          | -41.49      | -58.85                  | -60.69                  | 8.17                   | -48.49           |
| 4                   | #7167.35        | 34.47 AV                | 68.26          | -33.79      | -71.28                  | -72.79                  | 8.17                   | -60.79           |

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

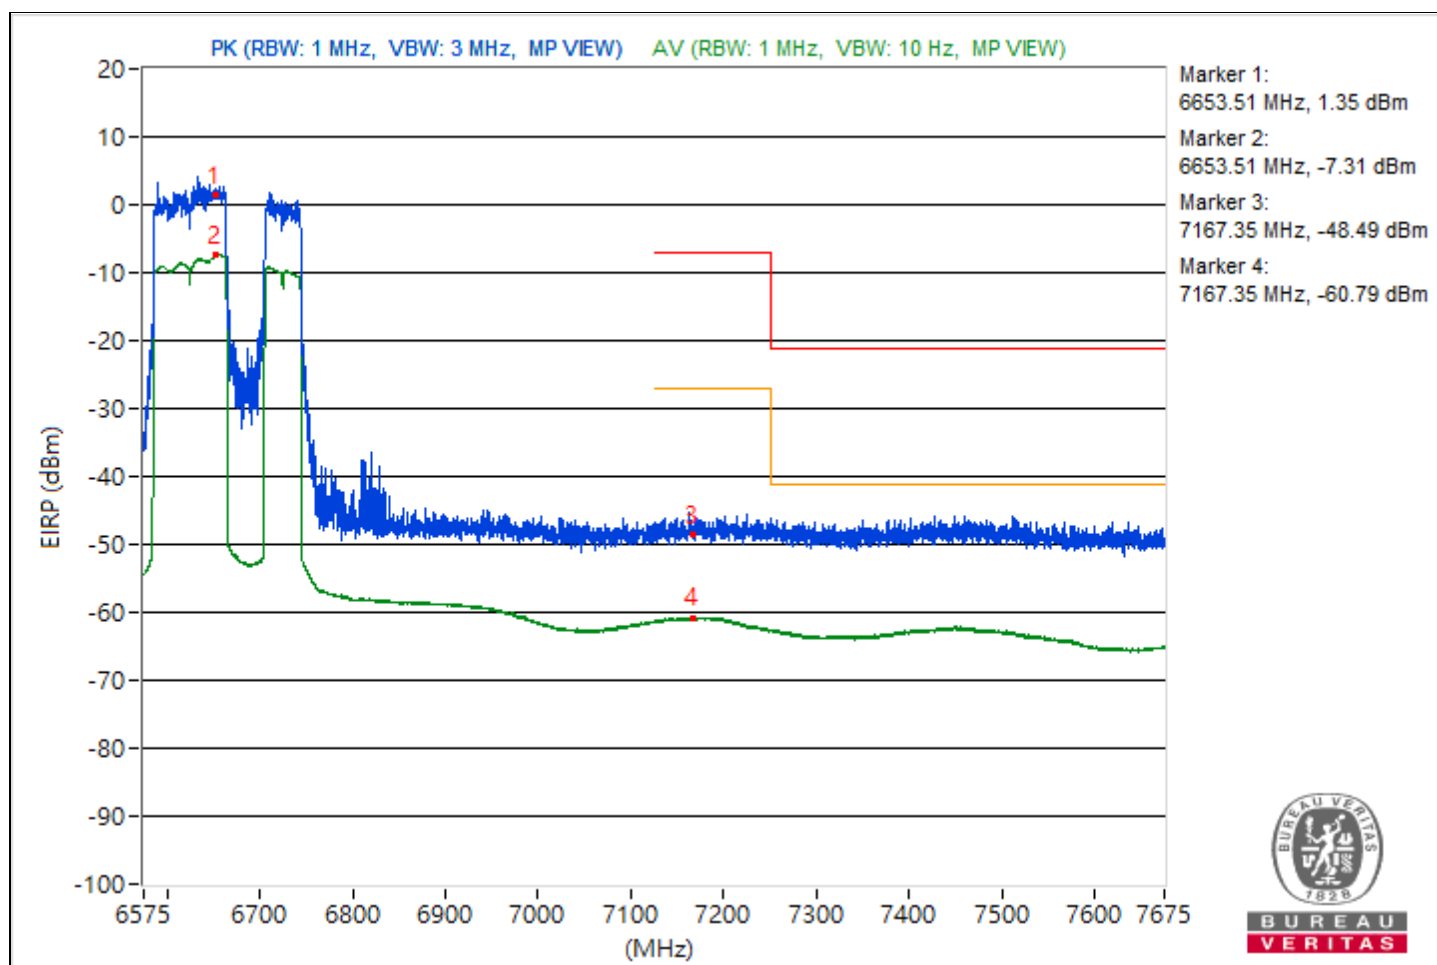

## Mode B

### 1TX

|                             |                |                                          |                                                                      |
|-----------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 2 : 5935 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11920.00        | 46.3 PK                 | 74.0           | -27.7       | 1.83 H             | 164                  | 34.1             | 12.2                     |
| 2                                                    | 11920.00        | 34.8 AV                 | 54.0           | -19.2       | 1.83 H             | 164                  | 22.6             | 12.2                     |
| 3                                                    | 17880.00        | 49.4 PK                 | 74.0           | -24.6       | 1.42 H             | 241                  | 26.4             | 23.0                     |
| 4                                                    | 17880.00        | 38.3 AV                 | 54.0           | -15.7       | 1.42 H             | 241                  | 15.3             | 23.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11920.00        | 46.5 PK                 | 74.0           | -27.5       | 1.29 V             | 200                  | 34.3             | 12.2                     |
| 2                                                    | 11920.00        | 35.6 AV                 | 54.0           | -18.4       | 1.29 V             | 200                  | 23.4             | 12.2                     |
| 3                                                    | 17880.00        | 48.5 PK                 | 74.0           | -25.5       | 1.06 V             | 121                  | 25.5             | 23.0                     |
| 4                                                    | 17880.00        | 37.6 AV                 | 54.0           | -16.4       | 1.06 V             | 121                  | 14.6             | 23.0                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                |                                          |                                                                      |
|-----------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.5 PK                 | 74.0           | -26.5       | 1.78 H             | 149                  | 35.3             | 12.2                     |
| 2                                                    | 11910.00        | 36.0 AV                 | 54.0           | -18.0       | 1.78 H             | 149                  | 23.8             | 12.2                     |
| 3                                                    | 17865.00        | 49.1 PK                 | 74.0           | -24.9       | 1.40 H             | 209                  | 26.5             | 22.6                     |
| 4                                                    | 17865.00        | 38.2 AV                 | 54.0           | -15.8       | 1.40 H             | 209                  | 15.6             | 22.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 46.7 PK                 | 74.0           | -27.3       | 1.33 V             | 194                  | 34.5             | 12.2                     |
| 2                                                    | 11910.00        | 35.8 AV                 | 54.0           | -18.2       | 1.33 V             | 194                  | 23.6             | 12.2                     |
| 3                                                    | 17865.00        | 48.5 PK                 | 74.0           | -25.5       | 1.11 V             | 139                  | 25.9             | 22.6                     |
| 4                                                    | 17865.00        | 37.8 AV                 | 54.0           | -16.2       | 1.11 V             | 139                  | 15.2             | 22.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.



|                             |                |                                          |                                                                      |
|-----------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 45 : 6175 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 47.7 PK                 | 74.0           | -26.3       | 1.80 H             | 139                  | 36.2             | 11.5                     |
| 2                                                    | 12350.00        | 36.0 AV                 | 54.0           | -18.0       | 1.80 H             | 139                  | 24.5             | 11.5                     |
| 3                                                    | 18525.00        | 48.9 PK                 | 74.0           | -25.1       | 1.45 H             | 196                  | 54.8             | -5.9                     |
| 4                                                    | 18525.00        | 37.8 AV                 | 54.0           | -16.2       | 1.45 H             | 196                  | 43.7             | -5.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 47.1 PK                 | 74.0           | -26.9       | 1.34 V             | 186                  | 35.6             | 11.5                     |
| 2                                                    | 12350.00        | 36.1 AV                 | 54.0           | -17.9       | 1.34 V             | 186                  | 24.6             | 11.5                     |
| 3                                                    | 18525.00        | 48.1 PK                 | 74.0           | -25.9       | 1.07 V             | 135                  | 54.0             | -5.9                     |
| 4                                                    | 18525.00        | 37.4 AV                 | 54.0           | -16.6       | 1.07 V             | 135                  | 43.3             | -5.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                |                                          |                                                                      |
|-----------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 47.6 PK                 | 88.2           | -40.6       | 1.78 H             | 162                  | 35.7             | 11.9                     |
| 2                                                    | #12830.00       | 35.8 AV                 | 68.2           | -32.4       | 1.78 H             | 162                  | 23.9             | 11.9                     |
| 3                                                    | 19245.00        | 49.0 PK                 | 74.0           | -25.0       | 1.43 H             | 200                  | 54.4             | -5.4                     |
| 4                                                    | 19245.00        | 38.1 AV                 | 54.0           | -15.9       | 1.43 H             | 200                  | 43.5             | -5.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 47.0 PK                 | 88.2           | -41.2       | 1.31 V             | 181                  | 35.1             | 11.9                     |
| 2                                                    | #12830.00       | 36.2 AV                 | 68.2           | -32.0       | 1.31 V             | 181                  | 24.3             | 11.9                     |
| 3                                                    | 19245.00        | 48.7 PK                 | 74.0           | -25.3       | 1.06 V             | 155                  | 54.1             | -5.4                     |
| 4                                                    | 19245.00        | 38.2 AV                 | 54.0           | -15.8       | 1.06 V             | 155                  | 43.6             | -5.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                |                                          |                                                                      |
|-----------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.4 PK                 | 88.2           | -40.8       | 1.75 H             | 148                  | 35.2             | 12.2                     |
| 2                                                    | #13070.00       | 35.7 AV                 | 68.2           | -32.5       | 1.75 H             | 148                  | 23.5             | 12.2                     |
| 3                                                    | 19605.00        | 49.1 PK                 | 74.0           | -24.9       | 1.43 H             | 222                  | 54.7             | -5.6                     |
| 4                                                    | 19605.00        | 38.3 AV                 | 54.0           | -15.7       | 1.43 H             | 222                  | 43.9             | -5.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 46.4 PK                 | 88.2           | -41.8       | 1.32 V             | 205                  | 34.2             | 12.2                     |
| 2                                                    | #13070.00       | 35.4 AV                 | 68.2           | -32.8       | 1.32 V             | 205                  | 23.2             | 12.2                     |
| 3                                                    | 19605.00        | 48.4 PK                 | 74.0           | -25.6       | 1.11 V             | 141                  | 54.0             | -5.6                     |
| 4                                                    | 19605.00        | 37.5 AV                 | 54.0           | -16.5       | 1.11 V             | 141                  | 43.1             | -5.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                |                                          |                                                                      |
|-----------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 149 : 6695 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 47.8 PK                 | 74.0           | -26.2       | 1.73 H             | 161                  | 33.8             | 14.0                     |
| 2                                                    | 13390.00        | 36.1 AV                 | 54.0           | -17.9       | 1.73 H             | 161                  | 22.1             | 14.0                     |
| 3                                                    | 20085.00        | 49.6 PK                 | 74.0           | -24.4       | 1.44 H             | 203                  | 54.6             | -5.0                     |
| 4                                                    | 20085.00        | 38.5 AV                 | 54.0           | -15.5       | 1.44 H             | 203                  | 43.5             | -5.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 47.0 PK                 | 74.0           | -27.0       | 1.32 V             | 195                  | 33.0             | 14.0                     |
| 2                                                    | 13390.00        | 36.0 AV                 | 54.0           | -18.0       | 1.32 V             | 195                  | 22.0             | 14.0                     |
| 3                                                    | 20085.00        | 48.3 PK                 | 74.0           | -25.7       | 1.06 V             | 139                  | 53.3             | -5.0                     |
| 4                                                    | 20085.00        | 37.9 AV                 | 54.0           | -16.1       | 1.06 V             | 139                  | 42.9             | -5.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                      |                |                               |                                                                      |
|----------------------|----------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode              | 802.11a        | Channel                       | CH 181 : 6855 MHz                                                    |
| Frequency Range      | 1 GHz ~ 40 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions      | 22 °C, 65 % RH                                                       |
| Tested By            | Willy Lin      |                               |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 47.6 PK                 | 88.2           | -40.6       | 1.76 H             | 160                  | 33.9             | 13.7                     |
| 2                                                    | #13710.00       | 36.0 AV                 | 68.2           | -32.2       | 1.76 H             | 160                  | 22.3             | 13.7                     |
| 3                                                    | 20565.00        | 49.3 PK                 | 74.0           | -24.7       | 1.38 H             | 222                  | 53.6             | -4.3                     |
| 4                                                    | 20565.00        | 38.2 AV                 | 54.0           | -15.8       | 1.38 H             | 222                  | 42.5             | -4.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 46.4 PK                 | 88.2           | -41.8       | 1.38 V             | 181                  | 32.7             | 13.7                     |
| 2                                                    | #13710.00       | 35.6 AV                 | 68.2           | -32.6       | 1.38 V             | 181                  | 21.9             | 13.7                     |
| 3                                                    | 20565.00        | 48.6 PK                 | 74.0           | -25.4       | 1.14 V             | 131                  | 52.9             | -4.3                     |
| 4                                                    | 20565.00        | 38.2 AV                 | 54.0           | -15.8       | 1.14 V             | 131                  | 42.5             | -4.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 2 : 5935 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11920.00        | 46.3 PK                 | 74.0           | -27.7       | 1.84 H             | 155                  | 34.1             | 12.2                     |
| 2                                                    | 11920.00        | 35.1 AV                 | 54.0           | -18.9       | 1.84 H             | 155                  | 22.9             | 12.2                     |
| 3                                                    | 17880.00        | 48.8 PK                 | 74.0           | -25.2       | 1.40 H             | 256                  | 25.8             | 23.0                     |
| 4                                                    | 17880.00        | 38.0 AV                 | 54.0           | -16.0       | 1.40 H             | 256                  | 15.0             | 23.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11920.00        | 45.8 PK                 | 74.0           | -28.2       | 1.30 V             | 215                  | 33.6             | 12.2                     |
| 2                                                    | 11920.00        | 35.2 AV                 | 54.0           | -18.8       | 1.30 V             | 215                  | 23.0             | 12.2                     |
| 3                                                    | 17880.00        | 48.6 PK                 | 74.0           | -25.4       | 1.06 V             | 125                  | 25.6             | 23.0                     |
| 4                                                    | 17880.00        | 37.5 AV                 | 54.0           | -16.5       | 1.06 V             | 125                  | 14.5             | 23.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.0 PK                 | 74.0           | -27.0       | 1.82 H             | 157                  | 34.8             | 12.2                     |
| 2                                                    | 11910.00        | 35.3 AV                 | 54.0           | -18.7       | 1.82 H             | 157                  | 23.1             | 12.2                     |
| 3                                                    | 17865.00        | 50.1 PK                 | 74.0           | -23.9       | 1.41 H             | 226                  | 27.5             | 22.6                     |
| 4                                                    | 17865.00        | 38.7 AV                 | 54.0           | -15.3       | 1.41 H             | 226                  | 16.1             | 22.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 46.4 PK                 | 74.0           | -27.6       | 1.27 V             | 179                  | 34.2             | 12.2                     |
| 2                                                    | 11910.00        | 35.6 AV                 | 54.0           | -18.4       | 1.27 V             | 179                  | 23.4             | 12.2                     |
| 3                                                    | 17865.00        | 48.7 PK                 | 74.0           | -25.3       | 1.16 V             | 124                  | 26.1             | 22.6                     |
| 4                                                    | 17865.00        | 37.8 AV                 | 54.0           | -16.2       | 1.16 V             | 124                  | 15.2             | 22.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 45 : 6175 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 46.7 PK                 | 74.0           | -27.3       | 1.88 H             | 154                  | 35.2             | 11.5                     |
| 2                                                    | 12350.00        | 35.2 AV                 | 54.0           | -18.8       | 1.88 H             | 154                  | 23.7             | 11.5                     |
| 3                                                    | 18525.00        | 50.4 PK                 | 74.0           | -23.6       | 1.46 H             | 233                  | 56.3             | -5.9                     |
| 4                                                    | 18525.00        | 38.8 AV                 | 54.0           | -15.2       | 1.46 H             | 233                  | 44.7             | -5.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 47.1 PK                 | 74.0           | -26.9       | 1.34 V             | 183                  | 35.6             | 11.5                     |
| 2                                                    | 12350.00        | 36.1 AV                 | 54.0           | -17.9       | 1.34 V             | 183                  | 24.6             | 11.5                     |
| 3                                                    | 18525.00        | 48.3 PK                 | 74.0           | -25.7       | 1.06 V             | 127                  | 54.2             | -5.9                     |
| 4                                                    | 18525.00        | 37.7 AV                 | 54.0           | -16.3       | 1.06 V             | 127                  | 43.6             | -5.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.



|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 46.9 PK                 | 88.2           | -41.3       | 1.80 H             | 160                  | 35.0             | 11.9                     |
| 2                                                    | #12830.00       | 35.5 AV                 | 68.2           | -32.7       | 1.80 H             | 160                  | 23.6             | 11.9                     |
| 3                                                    | 19245.00        | 50.2 PK                 | 74.0           | -23.8       | 1.42 H             | 217                  | 55.6             | -5.4                     |
| 4                                                    | 19245.00        | 39.0 AV                 | 54.0           | -15.0       | 1.42 H             | 217                  | 44.4             | -5.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 46.2 PK                 | 88.2           | -42.0       | 1.31 V             | 185                  | 34.3             | 11.9                     |
| 2                                                    | #12830.00       | 35.4 AV                 | 68.2           | -32.8       | 1.31 V             | 185                  | 23.5             | 11.9                     |
| 3                                                    | 19245.00        | 48.0 PK                 | 74.0           | -26.0       | 1.13 V             | 134                  | 53.4             | -5.4                     |
| 4                                                    | 19245.00        | 37.5 AV                 | 54.0           | -16.5       | 1.13 V             | 134                  | 42.9             | -5.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.5 PK                 | 88.2           | -40.7       | 1.87 H             | 170                  | 35.3             | 12.2                     |
| 2                                                    | #13070.00       | 35.5 AV                 | 68.2           | -32.7       | 1.87 H             | 170                  | 23.3             | 12.2                     |
| 3                                                    | 19605.00        | 50.0 PK                 | 74.0           | -24.0       | 1.39 H             | 211                  | 55.6             | -5.6                     |
| 4                                                    | 19605.00        | 38.8 AV                 | 54.0           | -15.2       | 1.39 H             | 211                  | 44.4             | -5.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 46.4 PK                 | 88.2           | -41.8       | 1.28 V             | 189                  | 34.2             | 12.2                     |
| 2                                                    | #13070.00       | 35.4 AV                 | 68.2           | -32.8       | 1.28 V             | 189                  | 23.2             | 12.2                     |
| 3                                                    | 19605.00        | 48.5 PK                 | 74.0           | -25.5       | 1.17 V             | 125                  | 54.1             | -5.6                     |
| 4                                                    | 19605.00        | 37.5 AV                 | 54.0           | -16.5       | 1.17 V             | 125                  | 43.1             | -5.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 149 : 6695 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 47.2 PK                 | 74.0           | -26.8       | 1.79 H             | 147                  | 33.2             | 14.0                     |
| 2                                                    | 13390.00        | 35.2 AV                 | 54.0           | -18.8       | 1.79 H             | 147                  | 21.2             | 14.0                     |
| 3                                                    | 20085.00        | 50.6 PK                 | 74.0           | -23.4       | 1.41 H             | 240                  | 55.6             | -5.0                     |
| 4                                                    | 20085.00        | 39.1 AV                 | 54.0           | -14.9       | 1.41 H             | 240                  | 44.1             | -5.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 46.9 PK                 | 74.0           | -27.1       | 1.28 V             | 189                  | 32.9             | 14.0                     |
| 2                                                    | 13390.00        | 35.8 AV                 | 54.0           | -18.2       | 1.28 V             | 189                  | 21.8             | 14.0                     |
| 3                                                    | 20085.00        | 48.2 PK                 | 74.0           | -25.8       | 1.14 V             | 124                  | 53.2             | -5.0                     |
| 4                                                    | 20085.00        | 37.3 AV                 | 54.0           | -16.7       | 1.14 V             | 124                  | 42.3             | -5.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 181 : 6855 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 46.6 PK                 | 88.2           | -41.6       | 1.82 H             | 148                  | 32.9             | 13.7                     |
| 2                                                    | #13710.00       | 34.8 AV                 | 68.2           | -33.4       | 1.82 H             | 148                  | 21.1             | 13.7                     |
| 3                                                    | 20565.00        | 49.7 PK                 | 74.0           | -24.3       | 1.40 H             | 223                  | 54.0             | -4.3                     |
| 4                                                    | 20565.00        | 38.2 AV                 | 54.0           | -15.8       | 1.40 H             | 223                  | 42.5             | -4.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 46.9 PK                 | 88.2           | -41.3       | 1.30 V             | 199                  | 33.2             | 13.7                     |
| 2                                                    | #13710.00       | 35.9 AV                 | 68.2           | -32.3       | 1.30 V             | 199                  | 22.2             | 13.7                     |
| 3                                                    | 20565.00        | 48.3 PK                 | 74.0           | -25.7       | 1.14 V             | 128                  | 52.6             | -4.3                     |
| 4                                                    | 20565.00        | 37.6 AV                 | 54.0           | -16.4       | 1.14 V             | 128                  | 41.9             | -4.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 3 : 5965 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11930.00        | 47.2 PK                 | 74.0           | -26.8       | 1.80 H             | 163                  | 35.0             | 12.2                     |
| 2                                                    | 11930.00        | 35.2 AV                 | 54.0           | -18.8       | 1.80 H             | 163                  | 23.0             | 12.2                     |
| 3                                                    | 17895.00        | 49.9 PK                 | 74.0           | -24.1       | 1.35 H             | 215                  | 26.6             | 23.3                     |
| 4                                                    | 17895.00        | 38.5 AV                 | 54.0           | -15.5       | 1.35 H             | 215                  | 15.2             | 23.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11930.00        | 46.6 PK                 | 74.0           | -27.4       | 1.38 V             | 202                  | 34.4             | 12.2                     |
| 2                                                    | 11930.00        | 35.5 AV                 | 54.0           | -18.5       | 1.38 V             | 202                  | 23.3             | 12.2                     |
| 3                                                    | 17895.00        | 49.0 PK                 | 74.0           | -25.0       | 1.10 V             | 155                  | 25.7             | 23.3                     |
| 4                                                    | 17895.00        | 38.1 AV                 | 54.0           | -15.9       | 1.10 V             | 155                  | 14.8             | 23.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 43 : 6165 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12330.00        | 47.5 PK                 | 74.0           | -26.5       | 1.87 H             | 152                  | 35.9             | 11.6                     |
| 2                                                    | 12330.00        | 35.6 AV                 | 54.0           | -18.4       | 1.87 H             | 152                  | 24.0             | 11.6                     |
| 3                                                    | 18495.00        | 49.9 PK                 | 74.0           | -24.1       | 1.35 H             | 224                  | 55.7             | -5.8                     |
| 4                                                    | 18495.00        | 38.6 AV                 | 54.0           | -15.4       | 1.35 H             | 224                  | 44.4             | -5.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12330.00        | 46.7 PK                 | 74.0           | -27.3       | 1.35 V             | 187                  | 35.1             | 11.6                     |
| 2                                                    | 12330.00        | 35.6 AV                 | 54.0           | -18.4       | 1.35 V             | 187                  | 24.0             | 11.6                     |
| 3                                                    | 18495.00        | 48.7 PK                 | 74.0           | -25.3       | 1.09 V             | 130                  | 54.5             | -5.8                     |
| 4                                                    | 18495.00        | 38.2 AV                 | 54.0           | -15.8       | 1.09 V             | 130                  | 44.0             | -5.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 91 : 6405 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12810.00       | 46.6 PK                 | 88.2           | -41.6       | 1.85 H             | 156                  | 34.8             | 11.8                     |
| 2                                                    | #12810.00       | 35.0 AV                 | 68.2           | -33.2       | 1.85 H             | 156                  | 23.2             | 11.8                     |
| 3                                                    | 19215.00        | 50.6 PK                 | 74.0           | -23.4       | 1.47 H             | 233                  | 56.1             | -5.5                     |
| 4                                                    | 19215.00        | 39.2 AV                 | 54.0           | -14.8       | 1.47 H             | 233                  | 44.7             | -5.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12810.00       | 47.2 PK                 | 88.2           | -41.0       | 1.29 V             | 202                  | 35.4             | 11.8                     |
| 2                                                    | #12810.00       | 35.5 AV                 | 68.2           | -32.7       | 1.29 V             | 202                  | 23.7             | 11.8                     |
| 3                                                    | 19215.00        | 48.1 PK                 | 74.0           | -25.9       | 1.15 V             | 149                  | 53.6             | -5.5                     |
| 4                                                    | 19215.00        | 37.6 AV                 | 54.0           | -16.4       | 1.15 V             | 149                  | 43.1             | -5.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 123 : 6565 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13130.00       | 46.8 PK                 | 88.2           | -41.4       | 1.84 H             | 165                  | 34.5             | 12.3                     |
| 2                                                    | #13130.00       | 35.2 AV                 | 68.2           | -33.0       | 1.84 H             | 165                  | 22.9             | 12.3                     |
| 3                                                    | 19695.00        | 50.5 PK                 | 74.0           | -23.5       | 1.38 H             | 216                  | 55.6             | -5.1                     |
| 4                                                    | 19695.00        | 39.1 AV                 | 54.0           | -14.9       | 1.38 H             | 216                  | 44.2             | -5.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13130.00       | 46.9 PK                 | 88.2           | -41.3       | 1.29 V             | 178                  | 34.6             | 12.3                     |
| 2                                                    | #13130.00       | 35.8 AV                 | 68.2           | -32.4       | 1.29 V             | 178                  | 23.5             | 12.3                     |
| 3                                                    | 19695.00        | 48.1 PK                 | 74.0           | -25.9       | 1.14 V             | 135                  | 53.2             | -5.1                     |
| 4                                                    | 19695.00        | 37.5 AV                 | 54.0           | -16.5       | 1.14 V             | 135                  | 42.6             | -5.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.



|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 155 : 6725 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13450.00       | 46.5 PK                 | 88.2           | -41.7       | 1.88 H             | 172                  | 32.5             | 14.0                     |
| 2                                                    | #13450.00       | 35.0 AV                 | 68.2           | -33.2       | 1.88 H             | 172                  | 21.0             | 14.0                     |
| 3                                                    | 20175.00        | 49.6 PK                 | 74.0           | -24.4       | 1.35 H             | 236                  | 54.3             | -4.7                     |
| 4                                                    | 20175.00        | 38.4 AV                 | 54.0           | -15.6       | 1.35 H             | 236                  | 43.1             | -4.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13450.00       | 46.5 PK                 | 88.2           | -41.7       | 1.37 V             | 204                  | 32.5             | 14.0                     |
| 2                                                    | #13450.00       | 35.5 AV                 | 68.2           | -32.7       | 1.37 V             | 204                  | 21.5             | 14.0                     |
| 3                                                    | 20175.00        | 48.3 PK                 | 74.0           | -25.7       | 1.15 V             | 143                  | 53.0             | -4.7                     |
| 4                                                    | 20175.00        | 37.8 AV                 | 54.0           | -16.2       | 1.15 V             | 143                  | 42.5             | -4.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                      |                  |                               |                                                                      |
|----------------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode              | 802.11be (EHT40) | Channel                       | CH 179 : 6845 MHz                                                    |
| Frequency Range      | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power (System) | 120 Vac, 60 Hz   | Environmental Conditions      | 22 °C, 65 % RH                                                       |
| Tested By            | Willy Lin        |                               |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13690.00       | 46.9 PK                 | 88.2           | -41.3       | 1.87 H             | 157                  | 33.2             | 13.7                     |
| 2                                                    | #13690.00       | 35.4 AV                 | 68.2           | -32.8       | 1.87 H             | 157                  | 21.7             | 13.7                     |
| 3                                                    | 20535.00        | 49.7 PK                 | 74.0           | -24.3       | 1.46 H             | 228                  | 54.0             | -4.3                     |
| 4                                                    | 20535.00        | 38.5 AV                 | 54.0           | -15.5       | 1.46 H             | 228                  | 42.8             | -4.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13690.00       | 46.3 PK                 | 88.2           | -41.9       | 1.30 V             | 187                  | 32.6             | 13.7                     |
| 2                                                    | #13690.00       | 35.4 AV                 | 68.2           | -32.8       | 1.30 V             | 187                  | 21.7             | 13.7                     |
| 3                                                    | 20535.00        | 48.7 PK                 | 74.0           | -25.3       | 1.14 V             | 139                  | 53.0             | -4.3                     |
| 4                                                    | 20535.00        | 37.7 AV                 | 54.0           | -16.3       | 1.14 V             | 139                  | 42.0             | -4.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 7 : 5985 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11970.00        | 47.2 PK                 | 74.0           | -26.8       | 1.79 H             | 156                  | 35.0             | 12.2                     |
| 2                                                    | 11970.00        | 35.3 AV                 | 54.0           | -18.7       | 1.79 H             | 156                  | 23.1             | 12.2                     |
| 3                                                    | 17955.00        | 50.3 PK                 | 74.0           | -23.7       | 1.39 H             | 237                  | 24.8             | 25.5                     |
| 4                                                    | 17955.00        | 39.1 AV                 | 54.0           | -14.9       | 1.39 H             | 237                  | 13.6             | 25.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11970.00        | 46.4 PK                 | 74.0           | -27.6       | 1.34 V             | 194                  | 34.2             | 12.2                     |
| 2                                                    | 11970.00        | 35.5 AV                 | 54.0           | -18.5       | 1.34 V             | 194                  | 23.3             | 12.2                     |
| 3                                                    | 17955.00        | 48.7 PK                 | 74.0           | -25.3       | 1.12 V             | 147                  | 23.2             | 25.5                     |
| 4                                                    | 17955.00        | 38.0 AV                 | 54.0           | -16.0       | 1.12 V             | 147                  | 12.5             | 25.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 39 : 6145 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12290.00        | 47.4 PK                 | 74.0           | -26.6       | 1.79 H             | 162                  | 35.7             | 11.7                     |
| 2                                                    | 12290.00        | 35.4 AV                 | 54.0           | -18.6       | 1.79 H             | 162                  | 23.7             | 11.7                     |
| 3                                                    | 18435.00        | 49.8 PK                 | 74.0           | -24.2       | 1.41 H             | 217                  | 55.7             | -5.9                     |
| 4                                                    | 18435.00        | 38.6 AV                 | 54.0           | -15.4       | 1.41 H             | 217                  | 44.5             | -5.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12290.00        | 47.0 PK                 | 74.0           | -27.0       | 1.29 V             | 202                  | 35.3             | 11.7                     |
| 2                                                    | 12290.00        | 36.3 AV                 | 54.0           | -17.7       | 1.29 V             | 202                  | 24.6             | 11.7                     |
| 3                                                    | 18435.00        | 48.0 PK                 | 74.0           | -26.0       | 1.13 V             | 134                  | 53.9             | -5.9                     |
| 4                                                    | 18435.00        | 37.4 AV                 | 54.0           | -16.6       | 1.13 V             | 134                  | 43.3             | -5.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                      |                  |                               |                                                                      |
|----------------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode              | 802.11be (EHT80) | Channel                       | CH 87 : 6385 MHz                                                     |
| Frequency Range      | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power (System) | 120 Vac, 60 Hz   | Environmental Conditions      | 22 °C, 65 % RH                                                       |
| Tested By            | Willy Lin        |                               |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12770.00       | 47.1 PK                 | 88.2           | -41.1       | 1.77 H             | 171                  | 35.3             | 11.8                     |
| 2                                                    | #12770.00       | 35.1 AV                 | 68.2           | -33.1       | 1.77 H             | 171                  | 23.3             | 11.8                     |
| 3                                                    | 19155.00        | 49.8 PK                 | 74.0           | -24.2       | 1.41 H             | 223                  | 55.3             | -5.5                     |
| 4                                                    | 19155.00        | 38.3 AV                 | 54.0           | -15.7       | 1.41 H             | 223                  | 43.8             | -5.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12770.00       | 46.4 PK                 | 88.2           | -41.8       | 1.38 V             | 179                  | 34.6             | 11.8                     |
| 2                                                    | #12770.00       | 35.6 AV                 | 68.2           | -32.6       | 1.38 V             | 179                  | 23.8             | 11.8                     |
| 3                                                    | 19155.00        | 48.5 PK                 | 74.0           | -25.5       | 1.05 V             | 140                  | 54.0             | -5.5                     |
| 4                                                    | 19155.00        | 37.7 AV                 | 54.0           | -16.3       | 1.05 V             | 140                  | 43.2             | -5.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 135 : 6625 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13250.00        | 47.2 PK                 | 74.0           | -26.8       | 1.83 H             | 158                  | 34.3             | 12.9                     |
| 2                                                    | 13250.00        | 35.5 AV                 | 54.0           | -18.5       | 1.83 H             | 158                  | 22.6             | 12.9                     |
| 3                                                    | 19875.00        | 50.3 PK                 | 74.0           | -23.7       | 1.38 H             | 235                  | 55.5             | -5.2                     |
| 4                                                    | 19875.00        | 39.1 AV                 | 54.0           | -14.9       | 1.38 H             | 235                  | 44.3             | -5.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13250.00        | 47.1 PK                 | 74.0           | -26.9       | 1.39 V             | 180                  | 34.2             | 12.9                     |
| 2                                                    | 13250.00        | 36.2 AV                 | 54.0           | -17.8       | 1.39 V             | 180                  | 23.3             | 12.9                     |
| 3                                                    | 19875.00        | 48.4 PK                 | 74.0           | -25.6       | 1.06 V             | 139                  | 53.6             | -5.2                     |
| 4                                                    | 19875.00        | 37.6 AV                 | 54.0           | -16.4       | 1.06 V             | 139                  | 42.8             | -5.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 151 : 6705 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13410.00       | 47.3 PK                 | 88.2           | -40.9       | 1.78 H             | 150                  | 33.3             | 14.0                     |
| 2                                                    | #13410.00       | 35.6 AV                 | 68.2           | -32.6       | 1.78 H             | 150                  | 21.6             | 14.0                     |
| 3                                                    | 20115.00        | 50.0 PK                 | 74.0           | -24.0       | 1.47 H             | 239                  | 54.9             | -4.9                     |
| 4                                                    | 20115.00        | 38.6 AV                 | 54.0           | -15.4       | 1.47 H             | 239                  | 43.5             | -4.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13410.00       | 47.2 PK                 | 88.2           | -41.0       | 1.27 V             | 198                  | 33.2             | 14.0                     |
| 2                                                    | #13410.00       | 36.3 AV                 | 68.2           | -31.9       | 1.27 V             | 198                  | 22.3             | 14.0                     |
| 3                                                    | 20115.00        | 48.8 PK                 | 74.0           | -25.2       | 1.08 V             | 145                  | 53.7             | -4.9                     |
| 4                                                    | 20115.00        | 38.1 AV                 | 54.0           | -15.9       | 1.08 V             | 145                  | 43.0             | -4.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 167 : 6785 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13570.00       | 46.4 PK                 | 88.2           | -41.8       | 1.77 H             | 168                  | 32.5             | 13.9                     |
| 2                                                    | #13570.00       | 35.0 AV                 | 68.2           | -33.2       | 1.77 H             | 168                  | 21.1             | 13.9                     |
| 3                                                    | 20355.00        | 50.3 PK                 | 74.0           | -23.7       | 1.43 H             | 226                  | 54.7             | -4.4                     |
| 4                                                    | 20355.00        | 38.6 AV                 | 54.0           | -15.4       | 1.43 H             | 226                  | 43.0             | -4.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13570.00       | 46.6 PK                 | 88.2           | -41.6       | 1.26 V             | 199                  | 32.7             | 13.9                     |
| 2                                                    | #13570.00       | 35.3 AV                 | 68.2           | -32.9       | 1.26 V             | 199                  | 21.4             | 13.9                     |
| 3                                                    | 20355.00        | 48.1 PK                 | 74.0           | -25.9       | 1.17 V             | 163                  | 52.5             | -4.4                     |
| 4                                                    | 20355.00        | 37.7 AV                 | 54.0           | -16.3       | 1.17 V             | 163                  | 42.1             | -4.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.



|                             |                   |                                          |                                                                      |
|-----------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 15 : 6025 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 46.7 PK                 | 74.0           | -27.3       | 1.79 H             | 170                  | 34.5             | 12.2                     |
| 2                                                    | 12050.00        | 35.0 AV                 | 54.0           | -19.0       | 1.79 H             | 170                  | 22.8             | 12.2                     |
| 3                                                    | 18075.00        | 50.1 PK                 | 74.0           | -23.9       | 1.40 H             | 231                  | 55.9             | -5.8                     |
| 4                                                    | 18075.00        | 38.8 AV                 | 54.0           | -15.2       | 1.40 H             | 231                  | 44.6             | -5.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 46.2 PK                 | 74.0           | -27.8       | 1.30 V             | 208                  | 34.0             | 12.2                     |
| 2                                                    | 12050.00        | 34.9 AV                 | 54.0           | -19.1       | 1.30 V             | 208                  | 22.7             | 12.2                     |
| 3                                                    | 18075.00        | 47.5 PK                 | 74.0           | -26.5       | 1.15 V             | 152                  | 53.3             | -5.8                     |
| 4                                                    | 18075.00        | 37.3 AV                 | 54.0           | -16.7       | 1.15 V             | 152                  | 43.1             | -5.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                   |                                          |                                                                      |
|-----------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 47 : 6185 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12370.00        | 46.3 PK                 | 74.0           | -27.7       | 1.83 H             | 153                  | 34.9             | 11.4                     |
| 2                                                    | 12370.00        | 34.9 AV                 | 54.0           | -19.1       | 1.83 H             | 153                  | 23.5             | 11.4                     |
| 3                                                    | 18555.00        | 50.0 PK                 | 74.0           | -24.0       | 1.35 H             | 225                  | 55.8             | -5.8                     |
| 4                                                    | 18555.00        | 38.8 AV                 | 54.0           | -15.2       | 1.35 H             | 225                  | 44.6             | -5.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12370.00        | 46.5 PK                 | 74.0           | -27.5       | 1.20 V             | 194                  | 35.1             | 11.4                     |
| 2                                                    | 12370.00        | 34.9 AV                 | 54.0           | -19.1       | 1.20 V             | 194                  | 23.5             | 11.4                     |
| 3                                                    | 18555.00        | 48.3 PK                 | 74.0           | -25.7       | 1.14 V             | 173                  | 54.1             | -5.8                     |
| 4                                                    | 18555.00        | 38.0 AV                 | 54.0           | -16.0       | 1.14 V             | 173                  | 43.8             | -5.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                   |                                          |                                                                      |
|-----------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 79 : 6345 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12690.00        | 47.2 PK                 | 74.0           | -26.8       | 1.81 H             | 158                  | 35.3             | 11.9                     |
| 2                                                    | 12690.00        | 35.2 AV                 | 54.0           | -18.8       | 1.81 H             | 158                  | 23.3             | 11.9                     |
| 3                                                    | 19035.00        | 50.2 PK                 | 74.0           | -23.8       | 1.45 H             | 227                  | 55.8             | -5.6                     |
| 4                                                    | 19035.00        | 38.7 AV                 | 54.0           | -15.3       | 1.45 H             | 227                  | 44.3             | -5.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12690.00        | 46.2 PK                 | 74.0           | -27.8       | 1.31 V             | 197                  | 34.3             | 11.9                     |
| 2                                                    | 12690.00        | 35.0 AV                 | 54.0           | -19.0       | 1.31 V             | 197                  | 23.1             | 11.9                     |
| 3                                                    | 19035.00        | 48.8 PK                 | 74.0           | -25.2       | 1.20 V             | 153                  | 54.4             | -5.6                     |
| 4                                                    | 19035.00        | 38.2 AV                 | 54.0           | -15.8       | 1.20 V             | 153                  | 43.8             | -5.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                   |                                          |                                                                      |
|-----------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 143 : 6665 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 47.6 PK                 | 74.0           | -26.4       | 1.77 H             | 145                  | 33.9             | 13.7                     |
| 2                                                    | 13330.00        | 35.6 AV                 | 54.0           | -18.4       | 1.77 H             | 145                  | 21.9             | 13.7                     |
| 3                                                    | 19995.00        | 50.0 PK                 | 74.0           | -24.0       | 1.43 H             | 238                  | 55.1             | -5.1                     |
| 4                                                    | 19995.00        | 38.6 AV                 | 54.0           | -15.4       | 1.43 H             | 238                  | 43.7             | -5.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 45.9 PK                 | 74.0           | -28.1       | 1.31 V             | 198                  | 32.2             | 13.7                     |
| 2                                                    | 13330.00        | 34.9 AV                 | 54.0           | -19.1       | 1.31 V             | 198                  | 21.2             | 13.7                     |
| 3                                                    | 19995.00        | 48.1 PK                 | 74.0           | -25.9       | 1.22 V             | 169                  | 53.2             | -5.1                     |
| 4                                                    | 19995.00        | 37.5 AV                 | 54.0           | -16.5       | 1.22 V             | 169                  | 42.6             | -5.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                   |                                          |                                                                      |
|-----------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT320) | <b>Channel</b>                           | CH 31 : 6105 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12210.00        | 47.6 PK                 | 74.0           | -26.4       | 1.78 H             | 166                  | 35.5             | 12.1                     |
| 2                                                    | 12210.00        | 35.8 AV                 | 54.0           | -18.2       | 1.78 H             | 166                  | 23.7             | 12.1                     |
| 3                                                    | 18315.00        | 50.1 PK                 | 74.0           | -23.9       | 1.36 H             | 239                  | 56.0             | -5.9                     |
| 4                                                    | 18315.00        | 38.6 AV                 | 54.0           | -15.4       | 1.36 H             | 239                  | 44.5             | -5.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12210.00        | 47.1 PK                 | 74.0           | -26.9       | 1.30 V             | 195                  | 35.0             | 12.1                     |
| 2                                                    | 12210.00        | 35.5 AV                 | 54.0           | -18.5       | 1.30 V             | 195                  | 23.4             | 12.1                     |
| 3                                                    | 18315.00        | 47.5 PK                 | 74.0           | -26.5       | 1.21 V             | 152                  | 53.4             | -5.9                     |
| 4                                                    | 18315.00        | 37.3 AV                 | 54.0           | -16.7       | 1.21 V             | 152                  | 43.2             | -5.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                   |                                          |                                                                      |
|-----------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT320) | <b>Channel</b>                           | CH 63 : 6265 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12530.00        | 46.7 PK                 | 74.0           | -27.3       | 1.82 H             | 156                  | 34.9             | 11.8                     |
| 2                                                    | 12530.00        | 34.9 AV                 | 54.0           | -19.1       | 1.82 H             | 156                  | 23.1             | 11.8                     |
| 3                                                    | 18795.00        | 49.9 PK                 | 74.0           | -24.1       | 1.41 H             | 213                  | 55.6             | -5.7                     |
| 4                                                    | 18795.00        | 38.5 AV                 | 54.0           | -15.5       | 1.41 H             | 213                  | 44.2             | -5.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12530.00        | 46.2 PK                 | 74.0           | -27.8       | 1.23 V             | 198                  | 34.4             | 11.8                     |
| 2                                                    | 12530.00        | 35.2 AV                 | 54.0           | -18.8       | 1.23 V             | 198                  | 23.4             | 11.8                     |
| 3                                                    | 18795.00        | 48.5 PK                 | 74.0           | -25.5       | 1.23 V             | 148                  | 54.2             | -5.7                     |
| 4                                                    | 18795.00        | 38.1 AV                 | 54.0           | -15.9       | 1.23 V             | 148                  | 43.8             | -5.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 2 : 5935 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22 °C, 64 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11920.00        | 47.5 PK                 | 74.0           | -26.5       | 1.80 H             | 172                  | 35.3             | 12.2                     |
| 2                                                    | 11920.00        | 35.5 AV                 | 54.0           | -18.5       | 1.80 H             | 172                  | 23.3             | 12.2                     |
| 3                                                    | 17880.00        | 49.8 PK                 | 74.0           | -24.2       | 1.28 H             | 232                  | 26.8             | 23.0                     |
| 4                                                    | 17880.00        | 38.3 AV                 | 54.0           | -15.7       | 1.28 H             | 232                  | 15.3             | 23.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11920.00        | 47.0 PK                 | 74.0           | -27.0       | 1.27 V             | 177                  | 34.8             | 12.2                     |
| 2                                                    | 11920.00        | 35.9 AV                 | 54.0           | -18.1       | 1.27 V             | 177                  | 23.7             | 12.2                     |
| 3                                                    | 17880.00        | 47.8 PK                 | 74.0           | -26.2       | 1.19 V             | 107                  | 24.8             | 23.0                     |
| 4                                                    | 17880.00        | 37.2 AV                 | 54.0           | -16.8       | 1.19 V             | 107                  | 14.2             | 23.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.4 PK                 | 74.0           | -26.6       | 1.77 H             | 159                  | 35.2             | 12.2                     |
| 2                                                    | 11910.00        | 35.9 AV                 | 54.0           | -18.1       | 1.77 H             | 159                  | 23.7             | 12.2                     |
| 3                                                    | 17865.00        | 49.4 PK                 | 74.0           | -24.6       | 1.26 H             | 229                  | 26.8             | 22.6                     |
| 4                                                    | 17865.00        | 38.2 AV                 | 54.0           | -15.8       | 1.26 H             | 229                  | 15.6             | 22.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 46.8 PK                 | 74.0           | -27.2       | 1.27 V             | 172                  | 34.6             | 12.2                     |
| 2                                                    | 11910.00        | 35.5 AV                 | 54.0           | -18.5       | 1.27 V             | 172                  | 23.3             | 12.2                     |
| 3                                                    | 17865.00        | 48.4 PK                 | 74.0           | -25.6       | 1.23 V             | 135                  | 25.8             | 22.6                     |
| 4                                                    | 17865.00        | 37.6 AV                 | 54.0           | -16.4       | 1.23 V             | 135                  | 15.0             | 22.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.



|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 45 : 6175 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 47.5 PK                 | 74.0           | -26.5       | 1.76 H             | 158                  | 36.0             | 11.5                     |
| 2                                                    | 12350.00        | 36.2 AV                 | 54.0           | -17.8       | 1.76 H             | 158                  | 24.7             | 11.5                     |
| 3                                                    | 18525.00        | 49.4 PK                 | 74.0           | -24.6       | 1.26 H             | 232                  | 55.3             | -5.9                     |
| 4                                                    | 18525.00        | 38.1 AV                 | 54.0           | -15.9       | 1.26 H             | 232                  | 44.0             | -5.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 47.2 PK                 | 74.0           | -26.8       | 1.22 V             | 175                  | 35.7             | 11.5                     |
| 2                                                    | 12350.00        | 35.7 AV                 | 54.0           | -18.3       | 1.22 V             | 175                  | 24.2             | 11.5                     |
| 3                                                    | 18525.00        | 48.3 PK                 | 74.0           | -25.7       | 1.27 V             | 151                  | 54.2             | -5.9                     |
| 4                                                    | 18525.00        | 37.4 AV                 | 54.0           | -16.6       | 1.27 V             | 151                  | 43.3             | -5.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 47.0 PK                 | 88.2           | -41.2       | 1.77 H             | 155                  | 35.1             | 11.9                     |
| 2                                                    | #12830.00       | 35.7 AV                 | 68.2           | -32.5       | 1.77 H             | 155                  | 23.8             | 11.9                     |
| 3                                                    | 19245.00        | 49.1 PK                 | 74.0           | -24.9       | 1.28 H             | 231                  | 54.5             | -5.4                     |
| 4                                                    | 19245.00        | 37.8 AV                 | 54.0           | -16.2       | 1.28 H             | 231                  | 43.2             | -5.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 46.7 PK                 | 88.2           | -41.5       | 1.31 V             | 166                  | 34.8             | 11.9                     |
| 2                                                    | #12830.00       | 35.6 AV                 | 68.2           | -32.6       | 1.31 V             | 166                  | 23.7             | 11.9                     |
| 3                                                    | 19245.00        | 48.3 PK                 | 74.0           | -25.7       | 1.25 V             | 142                  | 53.7             | -5.4                     |
| 4                                                    | 19245.00        | 37.6 AV                 | 54.0           | -16.4       | 1.25 V             | 142                  | 43.0             | -5.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.1 PK                 | 88.2           | -41.1       | 1.74 H             | 169                  | 34.9             | 12.2                     |
| 2                                                    | #13070.00       | 35.9 AV                 | 68.2           | -32.3       | 1.74 H             | 169                  | 23.7             | 12.2                     |
| 3                                                    | 19605.00        | 48.7 PK                 | 74.0           | -25.3       | 1.26 H             | 230                  | 54.3             | -5.6                     |
| 4                                                    | 19605.00        | 37.8 AV                 | 54.0           | -16.2       | 1.26 H             | 230                  | 43.4             | -5.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.0 PK                 | 88.2           | -41.2       | 1.25 V             | 165                  | 34.8             | 12.2                     |
| 2                                                    | #13070.00       | 35.5 AV                 | 68.2           | -32.7       | 1.25 V             | 165                  | 23.3             | 12.2                     |
| 3                                                    | 19605.00        | 48.7 PK                 | 74.0           | -25.3       | 1.28 V             | 142                  | 54.3             | -5.6                     |
| 4                                                    | 19605.00        | 37.7 AV                 | 54.0           | -16.3       | 1.28 V             | 142                  | 43.3             | -5.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 149 : 6695 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 46.8 PK                 | 74.0           | -27.2       | 1.74 H             | 162                  | 32.8             | 14.0                     |
| 2                                                    | 13390.00        | 35.6 AV                 | 54.0           | -18.4       | 1.74 H             | 162                  | 21.6             | 14.0                     |
| 3                                                    | 20085.00        | 49.3 PK                 | 74.0           | -24.7       | 1.30 H             | 221                  | 54.3             | -5.0                     |
| 4                                                    | 20085.00        | 38.1 AV                 | 54.0           | -15.9       | 1.30 H             | 221                  | 43.1             | -5.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 46.5 PK                 | 74.0           | -27.5       | 1.24 V             | 158                  | 32.5             | 14.0                     |
| 2                                                    | 13390.00        | 35.4 AV                 | 54.0           | -18.6       | 1.24 V             | 158                  | 21.4             | 14.0                     |
| 3                                                    | 20085.00        | 48.6 PK                 | 74.0           | -25.4       | 1.28 V             | 140                  | 53.6             | -5.0                     |
| 4                                                    | 20085.00        | 38.0 AV                 | 54.0           | -16.0       | 1.28 V             | 140                  | 43.0             | -5.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 181 : 6855 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 47.1 PK                 | 88.2           | -41.1       | 1.83 H             | 151                  | 33.4             | 13.7                     |
| 2                                                    | #13710.00       | 35.6 AV                 | 68.2           | -32.6       | 1.83 H             | 151                  | 21.9             | 13.7                     |
| 3                                                    | 20565.00        | 49.2 PK                 | 74.0           | -24.8       | 1.24 H             | 237                  | 53.5             | -4.3                     |
| 4                                                    | 20565.00        | 37.7 AV                 | 54.0           | -16.3       | 1.24 H             | 237                  | 42.0             | -4.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 47.5 PK                 | 88.2           | -40.7       | 1.22 V             | 177                  | 33.8             | 13.7                     |
| 2                                                    | #13710.00       | 36.0 AV                 | 68.2           | -32.2       | 1.22 V             | 177                  | 22.3             | 13.7                     |
| 3                                                    | 20565.00        | 48.3 PK                 | 74.0           | -25.7       | 1.23 V             | 127                  | 52.6             | -4.3                     |
| 4                                                    | 20565.00        | 37.3 AV                 | 54.0           | -16.7       | 1.23 V             | 127                  | 41.6             | -4.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 2 : 5935 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22 °C, 64 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11920.00        | 47.4 PK                 | 74.0           | -26.6       | 1.86 H             | 151                  | 35.2             | 12.2                     |
| 2                                                    | 11920.00        | 36.0 AV                 | 54.0           | -18.0       | 1.86 H             | 151                  | 23.8             | 12.2                     |
| 3                                                    | 17880.00        | 49.7 PK                 | 74.0           | -24.3       | 1.26 H             | 235                  | 26.7             | 23.0                     |
| 4                                                    | 17880.00        | 38.1 AV                 | 54.0           | -15.9       | 1.26 H             | 235                  | 15.1             | 23.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11920.00        | 47.3 PK                 | 74.0           | -26.7       | 1.30 V             | 191                  | 35.1             | 12.2                     |
| 2                                                    | 11920.00        | 36.4 AV                 | 54.0           | -17.6       | 1.30 V             | 191                  | 24.2             | 12.2                     |
| 3                                                    | 17880.00        | 48.6 PK                 | 74.0           | -25.4       | 1.26 V             | 109                  | 25.6             | 23.0                     |
| 4                                                    | 17880.00        | 37.8 AV                 | 54.0           | -16.2       | 1.26 V             | 109                  | 14.8             | 23.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.3 PK                 | 74.0           | -26.7       | 1.80 H             | 147                  | 35.1             | 12.2                     |
| 2                                                    | 11910.00        | 36.0 AV                 | 54.0           | -18.0       | 1.80 H             | 147                  | 23.8             | 12.2                     |
| 3                                                    | 17865.00        | 49.2 PK                 | 74.0           | -24.8       | 1.24 H             | 242                  | 26.6             | 22.6                     |
| 4                                                    | 17865.00        | 38.1 AV                 | 54.0           | -15.9       | 1.24 H             | 242                  | 15.5             | 22.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 46.8 PK                 | 74.0           | -27.2       | 1.32 V             | 187                  | 34.6             | 12.2                     |
| 2                                                    | 11910.00        | 35.4 AV                 | 54.0           | -18.6       | 1.32 V             | 187                  | 23.2             | 12.2                     |
| 3                                                    | 17865.00        | 48.5 PK                 | 74.0           | -25.5       | 1.19 V             | 139                  | 25.9             | 22.6                     |
| 4                                                    | 17865.00        | 37.7 AV                 | 54.0           | -16.3       | 1.19 V             | 139                  | 15.1             | 22.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 45 : 6175 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 47.8 PK                 | 74.0           | -26.2       | 1.76 H             | 165                  | 36.3             | 11.5                     |
| 2                                                    | 12350.00        | 36.0 AV                 | 54.0           | -18.0       | 1.76 H             | 165                  | 24.5             | 11.5                     |
| 3                                                    | 18525.00        | 49.6 PK                 | 74.0           | -24.4       | 1.22 H             | 232                  | 55.5             | -5.9                     |
| 4                                                    | 18525.00        | 38.1 AV                 | 54.0           | -15.9       | 1.22 H             | 232                  | 44.0             | -5.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 47.0 PK                 | 74.0           | -27.0       | 1.21 V             | 159                  | 35.5             | 11.5                     |
| 2                                                    | 12350.00        | 35.5 AV                 | 54.0           | -18.5       | 1.21 V             | 159                  | 24.0             | 11.5                     |
| 3                                                    | 18525.00        | 48.8 PK                 | 74.0           | -25.2       | 1.17 V             | 137                  | 54.7             | -5.9                     |
| 4                                                    | 18525.00        | 37.7 AV                 | 54.0           | -16.3       | 1.17 V             | 137                  | 43.6             | -5.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.



|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 48.0 PK                 | 88.2           | -40.2       | 1.81 H             | 149                  | 36.1             | 11.9                     |
| 2                                                    | #12830.00       | 36.3 AV                 | 68.2           | -31.9       | 1.81 H             | 149                  | 24.4             | 11.9                     |
| 3                                                    | 19245.00        | 48.9 PK                 | 74.0           | -25.1       | 1.24 H             | 214                  | 54.3             | -5.4                     |
| 4                                                    | 19245.00        | 37.8 AV                 | 54.0           | -16.2       | 1.24 H             | 214                  | 43.2             | -5.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 46.5 PK                 | 88.2           | -41.7       | 1.21 V             | 158                  | 34.6             | 11.9                     |
| 2                                                    | #12830.00       | 35.0 AV                 | 68.2           | -33.2       | 1.21 V             | 158                  | 23.1             | 11.9                     |
| 3                                                    | 19245.00        | 48.3 PK                 | 74.0           | -25.7       | 1.23 V             | 136                  | 53.7             | -5.4                     |
| 4                                                    | 19245.00        | 37.5 AV                 | 54.0           | -16.5       | 1.23 V             | 136                  | 42.9             | -5.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.2 PK                 | 88.2           | -41.0       | 1.81 H             | 174                  | 35.0             | 12.2                     |
| 2                                                    | #13070.00       | 35.8 AV                 | 68.2           | -32.4       | 1.81 H             | 174                  | 23.6             | 12.2                     |
| 3                                                    | 19605.00        | 49.5 PK                 | 74.0           | -24.5       | 1.22 H             | 243                  | 55.1             | -5.6                     |
| 4                                                    | 19605.00        | 38.1 AV                 | 54.0           | -15.9       | 1.22 H             | 243                  | 43.7             | -5.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 46.7 PK                 | 88.2           | -41.5       | 1.31 V             | 172                  | 34.5             | 12.2                     |
| 2                                                    | #13070.00       | 35.1 AV                 | 68.2           | -33.1       | 1.31 V             | 172                  | 22.9             | 12.2                     |
| 3                                                    | 19605.00        | 48.9 PK                 | 74.0           | -25.1       | 1.19 V             | 141                  | 54.5             | -5.6                     |
| 4                                                    | 19605.00        | 38.0 AV                 | 54.0           | -16.0       | 1.19 V             | 141                  | 43.6             | -5.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 149 : 6695 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 46.9 PK                 | 74.0           | -27.1       | 1.80 H             | 146                  | 32.9             | 14.0                     |
| 2                                                    | 13390.00        | 35.4 AV                 | 54.0           | -18.6       | 1.80 H             | 146                  | 21.4             | 14.0                     |
| 3                                                    | 20085.00        | 49.6 PK                 | 74.0           | -24.4       | 1.28 H             | 238                  | 54.6             | -5.0                     |
| 4                                                    | 20085.00        | 38.6 AV                 | 54.0           | -15.4       | 1.28 H             | 238                  | 43.6             | -5.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 46.3 PK                 | 74.0           | -27.7       | 1.33 V             | 188                  | 32.3             | 14.0                     |
| 2                                                    | 13390.00        | 35.1 AV                 | 54.0           | -18.9       | 1.33 V             | 188                  | 21.1             | 14.0                     |
| 3                                                    | 20085.00        | 48.6 PK                 | 74.0           | -25.4       | 1.27 V             | 147                  | 53.6             | -5.0                     |
| 4                                                    | 20085.00        | 37.6 AV                 | 54.0           | -16.4       | 1.27 V             | 147                  | 42.6             | -5.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 181 : 6855 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 47.5 PK                 | 88.2           | -40.7       | 1.78 H             | 172                  | 33.8             | 13.7                     |
| 2                                                    | #13710.00       | 35.9 AV                 | 68.2           | -32.3       | 1.78 H             | 172                  | 22.2             | 13.7                     |
| 3                                                    | 20565.00        | 49.6 PK                 | 74.0           | -24.4       | 1.24 H             | 241                  | 53.9             | -4.3                     |
| 4                                                    | 20565.00        | 38.3 AV                 | 54.0           | -15.7       | 1.24 H             | 241                  | 42.6             | -4.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 47.0 PK                 | 88.2           | -41.2       | 1.25 V             | 175                  | 33.3             | 13.7                     |
| 2                                                    | #13710.00       | 35.5 AV                 | 68.2           | -32.7       | 1.25 V             | 175                  | 21.8             | 13.7                     |
| 3                                                    | 20565.00        | 48.1 PK                 | 74.0           | -25.9       | 1.27 V             | 141                  | 52.4             | -4.3                     |
| 4                                                    | 20565.00        | 37.3 AV                 | 54.0           | -16.7       | 1.27 V             | 141                  | 41.6             | -4.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 2 : 5935 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 22 °C, 64 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11920.00        | 47.4 PK                 | 74.0           | -26.6       | 1.83 H             | 163                  | 35.2             | 12.2                     |
| 2                                                    | 11920.00        | 35.7 AV                 | 54.0           | -18.3       | 1.83 H             | 163                  | 23.5             | 12.2                     |
| 3                                                    | 17880.00        | 49.7 PK                 | 74.0           | -24.3       | 1.29 H             | 230                  | 26.7             | 23.0                     |
| 4                                                    | 17880.00        | 38.3 AV                 | 54.0           | -15.7       | 1.29 H             | 230                  | 15.3             | 23.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11920.00        | 47.4 PK                 | 74.0           | -26.6       | 1.29 V             | 175                  | 35.2             | 12.2                     |
| 2                                                    | 11920.00        | 36.3 AV                 | 54.0           | -17.7       | 1.29 V             | 175                  | 24.1             | 12.2                     |
| 3                                                    | 17880.00        | 48.7 PK                 | 74.0           | -25.3       | 1.23 V             | 137                  | 25.7             | 23.0                     |
| 4                                                    | 17880.00        | 38.0 AV                 | 54.0           | -16.0       | 1.23 V             | 137                  | 15.0             | 23.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.4 PK                 | 74.0           | -26.6       | 1.80 H             | 148                  | 35.2             | 12.2                     |
| 2                                                    | 11910.00        | 35.8 AV                 | 54.0           | -18.2       | 1.80 H             | 148                  | 23.6             | 12.2                     |
| 3                                                    | 17865.00        | 49.4 PK                 | 74.0           | -24.6       | 1.28 H             | 218                  | 26.8             | 22.6                     |
| 4                                                    | 17865.00        | 38.5 AV                 | 54.0           | -15.5       | 1.28 H             | 218                  | 15.9             | 22.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.0 PK                 | 74.0           | -27.0       | 1.25 V             | 186                  | 34.8             | 12.2                     |
| 2                                                    | 11910.00        | 36.0 AV                 | 54.0           | -18.0       | 1.25 V             | 186                  | 23.8             | 12.2                     |
| 3                                                    | 17865.00        | 48.4 PK                 | 74.0           | -25.6       | 1.25 V             | 122                  | 25.8             | 22.6                     |
| 4                                                    | 17865.00        | 37.7 AV                 | 54.0           | -16.3       | 1.25 V             | 122                  | 15.1             | 22.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 45 : 6175 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 46.8 PK                 | 74.0           | -27.2       | 1.73 H             | 144                  | 35.3             | 11.5                     |
| 2                                                    | 12350.00        | 35.6 AV                 | 54.0           | -18.4       | 1.73 H             | 144                  | 24.1             | 11.5                     |
| 3                                                    | 18525.00        | 49.3 PK                 | 74.0           | -24.7       | 1.28 H             | 230                  | 55.2             | -5.9                     |
| 4                                                    | 18525.00        | 37.9 AV                 | 54.0           | -16.1       | 1.28 H             | 230                  | 43.8             | -5.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 46.8 PK                 | 74.0           | -27.2       | 1.24 V             | 170                  | 35.3             | 11.5                     |
| 2                                                    | 12350.00        | 35.4 AV                 | 54.0           | -18.6       | 1.24 V             | 170                  | 23.9             | 11.5                     |
| 3                                                    | 18525.00        | 48.1 PK                 | 74.0           | -25.9       | 1.24 V             | 132                  | 54.0             | -5.9                     |
| 4                                                    | 18525.00        | 37.4 AV                 | 54.0           | -16.6       | 1.24 V             | 132                  | 43.3             | -5.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 47.1 PK                 | 88.2           | -41.1       | 1.76 H             | 163                  | 35.2             | 11.9                     |
| 2                                                    | #12830.00       | 35.8 AV                 | 68.2           | -32.4       | 1.76 H             | 163                  | 23.9             | 11.9                     |
| 3                                                    | 19245.00        | 49.3 PK                 | 74.0           | -24.7       | 1.24 H             | 233                  | 54.7             | -5.4                     |
| 4                                                    | 19245.00        | 37.8 AV                 | 54.0           | -16.2       | 1.24 H             | 233                  | 43.2             | -5.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 47.4 PK                 | 88.2           | -40.8       | 1.24 V             | 180                  | 35.5             | 11.9                     |
| 2                                                    | #12830.00       | 35.9 AV                 | 68.2           | -32.3       | 1.24 V             | 180                  | 24.0             | 11.9                     |
| 3                                                    | 19245.00        | 48.3 PK                 | 74.0           | -25.7       | 1.20 V             | 136                  | 53.7             | -5.4                     |
| 4                                                    | 19245.00        | 37.6 AV                 | 54.0           | -16.4       | 1.20 V             | 136                  | 43.0             | -5.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.



|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.5 PK                 | 88.2           | -40.7       | 1.75 H             | 162                  | 35.3             | 12.2                     |
| 2                                                    | #13070.00       | 36.1 AV                 | 68.2           | -32.1       | 1.75 H             | 162                  | 23.9             | 12.2                     |
| 3                                                    | 19605.00        | 49.1 PK                 | 74.0           | -24.9       | 1.27 H             | 231                  | 54.7             | -5.6                     |
| 4                                                    | 19605.00        | 38.0 AV                 | 54.0           | -16.0       | 1.27 H             | 231                  | 43.6             | -5.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.1 PK                 | 88.2           | -41.1       | 1.23 V             | 163                  | 34.9             | 12.2                     |
| 2                                                    | #13070.00       | 35.5 AV                 | 68.2           | -32.7       | 1.23 V             | 163                  | 23.3             | 12.2                     |
| 3                                                    | 19605.00        | 48.7 PK                 | 74.0           | -25.3       | 1.20 V             | 132                  | 54.3             | -5.6                     |
| 4                                                    | 19605.00        | 37.9 AV                 | 54.0           | -16.1       | 1.20 V             | 132                  | 43.5             | -5.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 149 : 6695 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 46.9 PK                 | 74.0           | -27.1       | 1.76 H             | 166                  | 32.9             | 14.0                     |
| 2                                                    | 13390.00        | 35.4 AV                 | 54.0           | -18.6       | 1.76 H             | 166                  | 21.4             | 14.0                     |
| 3                                                    | 20085.00        | 49.0 PK                 | 74.0           | -25.0       | 1.31 H             | 227                  | 54.0             | -5.0                     |
| 4                                                    | 20085.00        | 38.0 AV                 | 54.0           | -16.0       | 1.31 H             | 227                  | 43.0             | -5.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 46.5 PK                 | 74.0           | -27.5       | 1.26 V             | 169                  | 32.5             | 14.0                     |
| 2                                                    | 13390.00        | 35.1 AV                 | 54.0           | -18.9       | 1.26 V             | 169                  | 21.1             | 14.0                     |
| 3                                                    | 20085.00        | 48.3 PK                 | 74.0           | -25.7       | 1.21 V             | 145                  | 53.3             | -5.0                     |
| 4                                                    | 20085.00        | 37.5 AV                 | 54.0           | -16.5       | 1.21 V             | 145                  | 42.5             | -5.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 181 : 6855 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 46.9 PK                 | 88.2           | -41.3       | 1.78 H             | 146                  | 33.2             | 13.7                     |
| 2                                                    | #13710.00       | 35.5 AV                 | 68.2           | -32.7       | 1.78 H             | 146                  | 21.8             | 13.7                     |
| 3                                                    | 20565.00        | 49.2 PK                 | 74.0           | -24.8       | 1.23 H             | 228                  | 53.5             | -4.3                     |
| 4                                                    | 20565.00        | 37.9 AV                 | 54.0           | -16.1       | 1.23 H             | 228                  | 42.2             | -4.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 46.9 PK                 | 88.2           | -41.3       | 1.23 V             | 165                  | 33.2             | 13.7                     |
| 2                                                    | #13710.00       | 35.6 AV                 | 68.2           | -32.6       | 1.23 V             | 165                  | 21.9             | 13.7                     |
| 3                                                    | 20565.00        | 48.5 PK                 | 74.0           | -25.5       | 1.27 V             | 135                  | 52.8             | -4.3                     |
| 4                                                    | 20565.00        | 37.6 AV                 | 54.0           | -16.4       | 1.27 V             | 135                  | 41.9             | -4.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                      |                                          |                                                                      |
|-----------------------------|--------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) Punctured by 20 MHz | <b>Channel</b>                           | CH 7 : 5985 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                       | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                       | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                            |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11970.00        | 48.3 PK                 | 74.0           | -25.7       | 1.63 H             | 116                  | 36.1             | 12.2                     |
| 2                                                    | 11970.00        | 35.9 AV                 | 54.0           | -18.1       | 1.63 H             | 116                  | 23.7             | 12.2                     |
| 3                                                    | 17955.00        | 49.6 PK                 | 74.0           | -24.4       | 1.27 H             | 228                  | 24.1             | 25.5                     |
| 4                                                    | 17955.00        | 39.0 AV                 | 54.0           | -15.0       | 1.27 H             | 228                  | 13.5             | 25.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11970.00        | 46.2 PK                 | 74.0           | -27.8       | 1.34 V             | 169                  | 34.0             | 12.2                     |
| 2                                                    | 11970.00        | 35.1 AV                 | 54.0           | -18.9       | 1.34 V             | 169                  | 22.9             | 12.2                     |
| 3                                                    | 17955.00        | 48.3 PK                 | 74.0           | -25.7       | 1.15 V             | 147                  | 22.8             | 25.5                     |
| 4                                                    | 17955.00        | 37.3 AV                 | 54.0           | -16.7       | 1.15 V             | 147                  | 11.8             | 25.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                      |                                          |                                                                      |
|-----------------------------|--------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) Punctured by 20 MHz | <b>Channel</b>                           | CH 135 : 6625 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                       | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                       | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                            |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13250.00        | 48.4 PK                 | 74.0           | -25.6       | 1.66 H             | 122                  | 35.5             | 12.9                     |
| 2                                                    | 13250.00        | 36.1 AV                 | 54.0           | -17.9       | 1.66 H             | 122                  | 23.2             | 12.9                     |
| 3                                                    | 19875.00        | 49.9 PK                 | 74.0           | -24.1       | 1.30 H             | 225                  | 55.1             | -5.2                     |
| 4                                                    | 19875.00        | 39.4 AV                 | 54.0           | -14.6       | 1.30 H             | 225                  | 44.6             | -5.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13250.00        | 46.6 PK                 | 74.0           | -27.4       | 1.39 V             | 182                  | 33.7             | 12.9                     |
| 2                                                    | 13250.00        | 35.4 AV                 | 54.0           | -18.6       | 1.39 V             | 182                  | 22.5             | 12.9                     |
| 3                                                    | 19875.00        | 48.4 PK                 | 74.0           | -25.6       | 1.21 V             | 133                  | 53.6             | -5.2                     |
| 4                                                    | 19875.00        | 37.3 AV                 | 54.0           | -16.7       | 1.21 V             | 133                  | 42.5             | -5.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                          |                                          |                                                                      |
|-----------------------------|------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160)<br>Punctured by 20 MHz | <b>Channel</b>                           | CH 15 : 6025 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                           | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                           | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 48.0 PK                 | 74.0           | -26.0       | 1.65 H             | 131                  | 35.8             | 12.2                     |
| 2                                                    | 12050.00        | 35.7 AV                 | 54.0           | -18.3       | 1.65 H             | 131                  | 23.5             | 12.2                     |
| 3                                                    | 18075.00        | 49.1 PK                 | 74.0           | -24.9       | 1.25 H             | 223                  | 54.9             | -5.8                     |
| 4                                                    | 18075.00        | 38.8 AV                 | 54.0           | -15.2       | 1.25 H             | 223                  | 44.6             | -5.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 45.5 PK                 | 74.0           | -28.5       | 1.33 V             | 175                  | 33.3             | 12.2                     |
| 2                                                    | 12050.00        | 34.6 AV                 | 54.0           | -19.4       | 1.33 V             | 175                  | 22.4             | 12.2                     |
| 3                                                    | 18075.00        | 48.0 PK                 | 74.0           | -26.0       | 1.20 V             | 132                  | 53.8             | -5.8                     |
| 4                                                    | 18075.00        | 37.0 AV                 | 54.0           | -17.0       | 1.20 V             | 132                  | 42.8             | -5.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                          |                                          |                                                                      |
|-----------------------------|------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160)<br>Punctured by 20 MHz | <b>Channel</b>                           | CH 143 : 6665 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                           | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                           | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 47.8 PK                 | 74.0           | -26.2       | 1.68 H             | 130                  | 34.1             | 13.7                     |
| 2                                                    | 13330.00        | 35.6 AV                 | 54.0           | -18.4       | 1.68 H             | 130                  | 21.9             | 13.7                     |
| 3                                                    | 19995.00        | 49.3 PK                 | 74.0           | -24.7       | 1.28 H             | 236                  | 54.4             | -5.1                     |
| 4                                                    | 19995.00        | 38.8 AV                 | 54.0           | -15.2       | 1.28 H             | 236                  | 43.9             | -5.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 45.8 PK                 | 74.0           | -28.2       | 1.35 V             | 164                  | 32.1             | 13.7                     |
| 2                                                    | 13330.00        | 34.7 AV                 | 54.0           | -19.3       | 1.35 V             | 164                  | 21.0             | 13.7                     |
| 3                                                    | 19995.00        | 48.3 PK                 | 74.0           | -25.7       | 1.15 V             | 160                  | 53.4             | -5.1                     |
| 4                                                    | 19995.00        | 37.3 AV                 | 54.0           | -16.7       | 1.15 V             | 160                  | 42.4             | -5.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                          |                                          |                                                                      |
|-----------------------------|------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160)<br>Punctured by 40 MHz | <b>Channel</b>                           | CH 15 : 6025 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                           | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                           | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 48.6 PK                 | 74.0           | -25.4       | 1.58 H             | 126                  | 36.4             | 12.2                     |
| 2                                                    | 12050.00        | 36.3 AV                 | 54.0           | -17.7       | 1.58 H             | 126                  | 24.1             | 12.2                     |
| 3                                                    | 18075.00        | 49.8 PK                 | 74.0           | -24.2       | 1.28 H             | 231                  | 55.6             | -5.8                     |
| 4                                                    | 18075.00        | 39.1 AV                 | 54.0           | -14.9       | 1.28 H             | 231                  | 44.9             | -5.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 45.6 PK                 | 74.0           | -28.4       | 1.39 V             | 161                  | 33.4             | 12.2                     |
| 2                                                    | 12050.00        | 34.7 AV                 | 54.0           | -19.3       | 1.39 V             | 161                  | 22.5             | 12.2                     |
| 3                                                    | 18075.00        | 48.4 PK                 | 74.0           | -25.6       | 1.13 V             | 145                  | 54.2             | -5.8                     |
| 4                                                    | 18075.00        | 37.2 AV                 | 54.0           | -16.8       | 1.13 V             | 145                  | 43.0             | -5.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.



|                             |                                          |                                          |                                                                      |
|-----------------------------|------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160)<br>Punctured by 40 MHz | <b>Channel</b>                           | CH 143 : 6665 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                           | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                           | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 48.2 PK                 | 74.0           | -25.8       | 1.68 H             | 108                  | 34.5             | 13.7                     |
| 2                                                    | 13330.00        | 35.6 AV                 | 54.0           | -18.4       | 1.68 H             | 108                  | 21.9             | 13.7                     |
| 3                                                    | 19995.00        | 49.7 PK                 | 74.0           | -24.3       | 1.28 H             | 239                  | 54.8             | -5.1                     |
| 4                                                    | 19995.00        | 39.1 AV                 | 54.0           | -14.9       | 1.28 H             | 239                  | 44.2             | -5.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 45.7 PK                 | 74.0           | -28.3       | 1.29 V             | 180                  | 32.0             | 13.7                     |
| 2                                                    | 13330.00        | 34.8 AV                 | 54.0           | -19.2       | 1.29 V             | 180                  | 21.1             | 13.7                     |
| 3                                                    | 19995.00        | 48.5 PK                 | 74.0           | -25.5       | 1.20 V             | 133                  | 53.6             | -5.1                     |
| 4                                                    | 19995.00        | 37.3 AV                 | 54.0           | -16.7       | 1.20 V             | 133                  | 42.4             | -5.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                          |                                          |                                                                      |
|-----------------------------|------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT320)<br>Punctured by 40 MHz | <b>Channel</b>                           | CH 63 : 6265 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                           | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                           | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12530.00        | 47.8 PK                 | 74.0           | -26.2       | 1.63 H             | 101                  | 36.0             | 11.8                     |
| 2                                                    | 12530.00        | 35.6 AV                 | 54.0           | -18.4       | 1.63 H             | 101                  | 23.8             | 11.8                     |
| 3                                                    | 18795.00        | 49.8 PK                 | 74.0           | -24.2       | 1.33 H             | 236                  | 55.5             | -5.7                     |
| 4                                                    | 18795.00        | 38.9 AV                 | 54.0           | -15.1       | 1.33 H             | 236                  | 44.6             | -5.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12530.00        | 46.1 PK                 | 74.0           | -27.9       | 1.36 V             | 177                  | 34.3             | 11.8                     |
| 2                                                    | 12530.00        | 35.0 AV                 | 54.0           | -19.0       | 1.36 V             | 177                  | 23.2             | 11.8                     |
| 3                                                    | 18795.00        | 48.8 PK                 | 74.0           | -25.2       | 1.11 V             | 151                  | 54.5             | -5.7                     |
| 4                                                    | 18795.00        | 37.7 AV                 | 54.0           | -16.3       | 1.11 V             | 151                  | 43.4             | -5.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                          |                                          |                                                                      |
|-----------------------------|------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT320)<br>Punctured by 80 MHz | <b>Channel</b>                           | CH 63 : 6265 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                           | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                           | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12530.00        | 48.0 PK                 | 74.0           | -26.0       | 1.68 H             | 115                  | 36.2             | 11.8                     |
| 2                                                    | 12530.00        | 35.7 AV                 | 54.0           | -18.3       | 1.68 H             | 115                  | 23.9             | 11.8                     |
| 3                                                    | 18795.00        | 49.5 PK                 | 74.0           | -24.5       | 1.27 H             | 242                  | 55.2             | -5.7                     |
| 4                                                    | 18795.00        | 38.6 AV                 | 54.0           | -15.4       | 1.27 H             | 242                  | 44.3             | -5.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12530.00        | 46.9 PK                 | 74.0           | -27.1       | 1.38 V             | 175                  | 35.1             | 11.8                     |
| 2                                                    | 12530.00        | 35.5 AV                 | 54.0           | -18.5       | 1.38 V             | 175                  | 23.7             | 11.8                     |
| 3                                                    | 18795.00        | 48.4 PK                 | 74.0           | -25.6       | 1.13 V             | 151                  | 54.1             | -5.7                     |
| 4                                                    | 18795.00        | 37.4 AV                 | 54.0           | -16.6       | 1.13 V             | 151                  | 43.1             | -5.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                             |                                          |                                                                      |
|-----------------------------|---------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT320)<br>Punctured by 80+40 MHz | <b>Channel</b>                           | CH 63 : 6265 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                              | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12530.00        | 48.3 PK                 | 74.0           | -25.7       | 1.58 H             | 111                  | 36.5             | 11.8                     |
| 2                                                    | 12530.00        | 35.7 AV                 | 54.0           | -18.3       | 1.58 H             | 111                  | 23.9             | 11.8                     |
| 3                                                    | 18795.00        | 49.0 PK                 | 74.0           | -25.0       | 1.22 H             | 230                  | 54.7             | -5.7                     |
| 4                                                    | 18795.00        | 38.6 AV                 | 54.0           | -15.4       | 1.22 H             | 230                  | 44.3             | -5.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12530.00        | 45.7 PK                 | 74.0           | -28.3       | 1.39 V             | 175                  | 33.9             | 11.8                     |
| 2                                                    | 12530.00        | 34.8 AV                 | 54.0           | -19.2       | 1.39 V             | 175                  | 23.0             | 11.8                     |
| 3                                                    | 18795.00        | 47.9 PK                 | 74.0           | -26.1       | 1.12 V             | 156                  | 53.6             | -5.7                     |
| 4                                                    | 18795.00        | 36.9 AV                 | 54.0           | -17.1       | 1.12 V             | 156                  | 42.6             | -5.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

## 2TX

|                             |                |                                          |                                                                      |
|-----------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 2 : 5935 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11920.00        | 47.4 PK                 | 74.0           | -26.6       | 1.76 H             | 151                  | 35.2             | 12.2                     |
| 2                                                    | 11920.00        | 36.1 AV                 | 54.0           | -17.9       | 1.76 H             | 151                  | 23.9             | 12.2                     |
| 3                                                    | 17880.00        | 50.4 PK                 | 74.0           | -23.6       | 1.44 H             | 215                  | 27.4             | 23.0                     |
| 4                                                    | 17880.00        | 39.1 AV                 | 54.0           | -14.9       | 1.44 H             | 215                  | 16.1             | 23.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11920.00        | 46.7 PK                 | 74.0           | -27.3       | 1.34 V             | 191                  | 34.5             | 12.2                     |
| 2                                                    | 11920.00        | 35.3 AV                 | 54.0           | -18.7       | 1.34 V             | 191                  | 23.1             | 12.2                     |
| 3                                                    | 17880.00        | 47.8 PK                 | 74.0           | -26.2       | 1.17 V             | 160                  | 24.8             | 23.0                     |
| 4                                                    | 17880.00        | 37.6 AV                 | 54.0           | -16.4       | 1.17 V             | 160                  | 14.6             | 23.0                     |

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                |                                          |                                                                      |
|-----------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.9 PK                 | 74.0           | -26.1       | 1.77 H             | 144                  | 35.7             | 12.2                     |
| 2                                                    | 11910.00        | 36.2 AV                 | 54.0           | -17.8       | 1.77 H             | 144                  | 24.0             | 12.2                     |
| 3                                                    | 17865.00        | 49.4 PK                 | 74.0           | -24.6       | 1.39 H             | 223                  | 26.8             | 22.6                     |
| 4                                                    | 17865.00        | 38.6 AV                 | 54.0           | -15.4       | 1.39 H             | 223                  | 16.0             | 22.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.1 PK                 | 74.0           | -26.9       | 1.29 V             | 185                  | 34.9             | 12.2                     |
| 2                                                    | 11910.00        | 36.0 AV                 | 54.0           | -18.0       | 1.29 V             | 185                  | 23.8             | 12.2                     |
| 3                                                    | 17865.00        | 48.2 PK                 | 74.0           | -25.8       | 1.17 V             | 160                  | 25.6             | 22.6                     |
| 4                                                    | 17865.00        | 37.4 AV                 | 54.0           | -16.6       | 1.17 V             | 160                  | 14.8             | 22.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                |                                          |                                                                      |
|-----------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 45 : 6175 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 47.0 PK                 | 74.0           | -27.0       | 1.75 H             | 144                  | 35.5             | 11.5                     |
| 2                                                    | 12350.00        | 35.5 AV                 | 54.0           | -18.5       | 1.75 H             | 144                  | 24.0             | 11.5                     |
| 3                                                    | 18525.00        | 50.0 PK                 | 74.0           | -24.0       | 1.36 H             | 216                  | 55.9             | -5.9                     |
| 4                                                    | 18525.00        | 39.2 AV                 | 54.0           | -14.8       | 1.36 H             | 216                  | 45.1             | -5.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 46.6 PK                 | 74.0           | -27.4       | 1.37 V             | 182                  | 35.1             | 11.5                     |
| 2                                                    | 12350.00        | 35.3 AV                 | 54.0           | -18.7       | 1.37 V             | 182                  | 23.8             | 11.5                     |
| 3                                                    | 18525.00        | 48.6 PK                 | 74.0           | -25.4       | 1.16 V             | 135                  | 54.5             | -5.9                     |
| 4                                                    | 18525.00        | 37.9 AV                 | 54.0           | -16.1       | 1.16 V             | 135                  | 43.8             | -5.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                |                                          |                                                                      |
|-----------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 47.3 PK                 | 88.2           | -40.9       | 1.68 H             | 131                  | 35.4             | 11.9                     |
| 2                                                    | #12830.00       | 35.7 AV                 | 68.2           | -32.5       | 1.68 H             | 131                  | 23.8             | 11.9                     |
| 3                                                    | 19245.00        | 50.1 PK                 | 74.0           | -23.9       | 1.40 H             | 216                  | 55.5             | -5.4                     |
| 4                                                    | 19245.00        | 38.7 AV                 | 54.0           | -15.3       | 1.40 H             | 216                  | 44.1             | -5.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 46.7 PK                 | 88.2           | -41.5       | 1.36 V             | 193                  | 34.8             | 11.9                     |
| 2                                                    | #12830.00       | 35.4 AV                 | 68.2           | -32.8       | 1.36 V             | 193                  | 23.5             | 11.9                     |
| 3                                                    | 19245.00        | 47.8 PK                 | 74.0           | -26.2       | 1.16 V             | 161                  | 53.2             | -5.4                     |
| 4                                                    | 19245.00        | 37.0 AV                 | 54.0           | -17.0       | 1.16 V             | 161                  | 42.4             | -5.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.



|                             |                |                                          |                                                                      |
|-----------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.6 PK                 | 88.2           | -40.6       | 1.72 H             | 131                  | 35.4             | 12.2                     |
| 2                                                    | #13070.00       | 36.1 AV                 | 68.2           | -32.1       | 1.72 H             | 131                  | 23.9             | 12.2                     |
| 3                                                    | 19605.00        | 50.6 PK                 | 74.0           | -23.4       | 1.36 H             | 207                  | 56.2             | -5.6                     |
| 4                                                    | 19605.00        | 39.2 AV                 | 54.0           | -14.8       | 1.36 H             | 207                  | 44.8             | -5.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.1 PK                 | 88.2           | -41.1       | 1.39 V             | 188                  | 34.9             | 12.2                     |
| 2                                                    | #13070.00       | 35.9 AV                 | 68.2           | -32.3       | 1.39 V             | 188                  | 23.7             | 12.2                     |
| 3                                                    | 19605.00        | 48.3 PK                 | 74.0           | -25.7       | 1.16 V             | 148                  | 53.9             | -5.6                     |
| 4                                                    | 19605.00        | 37.3 AV                 | 54.0           | -16.7       | 1.16 V             | 148                  | 42.9             | -5.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                |                                          |                                                                      |
|-----------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 149 : 6695 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 47.5 PK                 | 74.0           | -26.5       | 1.77 H             | 145                  | 33.5             | 14.0                     |
| 2                                                    | 13390.00        | 35.6 AV                 | 54.0           | -18.4       | 1.77 H             | 145                  | 21.6             | 14.0                     |
| 3                                                    | 20085.00        | 50.0 PK                 | 74.0           | -24.0       | 1.30 H             | 215                  | 55.0             | -5.0                     |
| 4                                                    | 20085.00        | 39.0 AV                 | 54.0           | -15.0       | 1.30 H             | 215                  | 44.0             | -5.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 46.9 PK                 | 74.0           | -27.1       | 1.28 V             | 181                  | 32.9             | 14.0                     |
| 2                                                    | 13390.00        | 35.6 AV                 | 54.0           | -18.4       | 1.28 V             | 181                  | 21.6             | 14.0                     |
| 3                                                    | 20085.00        | 48.5 PK                 | 74.0           | -25.5       | 1.17 V             | 143                  | 53.5             | -5.0                     |
| 4                                                    | 20085.00        | 37.5 AV                 | 54.0           | -16.5       | 1.17 V             | 143                  | 42.5             | -5.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                |                                          |                                                                      |
|-----------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11a        | <b>Channel</b>                           | CH 181 : 6855 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 47.5 PK                 | 88.2           | -40.7       | 1.74 H             | 154                  | 33.8             | 13.7                     |
| 2                                                    | #13710.00       | 35.8 AV                 | 68.2           | -32.4       | 1.74 H             | 154                  | 22.1             | 13.7                     |
| 3                                                    | 20565.00        | 50.3 PK                 | 74.0           | -23.7       | 1.39 H             | 203                  | 54.6             | -4.3                     |
| 4                                                    | 20565.00        | 39.3 AV                 | 54.0           | -14.7       | 1.39 H             | 203                  | 43.6             | -4.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 46.8 PK                 | 88.2           | -41.4       | 1.34 V             | 201                  | 33.1             | 13.7                     |
| 2                                                    | #13710.00       | 35.5 AV                 | 68.2           | -32.7       | 1.34 V             | 201                  | 21.8             | 13.7                     |
| 3                                                    | 20565.00        | 48.4 PK                 | 74.0           | -25.6       | 1.24 V             | 151                  | 52.7             | -4.3                     |
| 4                                                    | 20565.00        | 37.6 AV                 | 54.0           | -16.4       | 1.24 V             | 151                  | 41.9             | -4.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 2 : 5935 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11920.00        | 47.2 PK                 | 74.0           | -26.8       | 1.79 H             | 143                  | 35.0             | 12.2                     |
| 2                                                    | 11920.00        | 35.7 AV                 | 54.0           | -18.3       | 1.79 H             | 143                  | 23.5             | 12.2                     |
| 3                                                    | 17880.00        | 50.3 PK                 | 74.0           | -23.7       | 1.39 H             | 208                  | 27.3             | 23.0                     |
| 4                                                    | 17880.00        | 39.1 AV                 | 54.0           | -14.9       | 1.39 H             | 208                  | 16.1             | 23.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11920.00        | 47.3 PK                 | 74.0           | -26.7       | 1.31 V             | 181                  | 35.1             | 12.2                     |
| 2                                                    | 11920.00        | 36.2 AV                 | 54.0           | -17.8       | 1.31 V             | 181                  | 24.0             | 12.2                     |
| 3                                                    | 17880.00        | 48.3 PK                 | 74.0           | -25.7       | 1.18 V             | 150                  | 25.3             | 23.0                     |
| 4                                                    | 17880.00        | 37.7 AV                 | 54.0           | -16.3       | 1.18 V             | 150                  | 14.7             | 23.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.2 PK                 | 74.0           | -26.8       | 1.76 H             | 155                  | 35.0             | 12.2                     |
| 2                                                    | 11910.00        | 35.7 AV                 | 54.0           | -18.3       | 1.76 H             | 155                  | 23.5             | 12.2                     |
| 3                                                    | 17865.00        | 50.1 PK                 | 74.0           | -23.9       | 1.38 H             | 221                  | 27.5             | 22.6                     |
| 4                                                    | 17865.00        | 38.8 AV                 | 54.0           | -15.2       | 1.38 H             | 221                  | 16.2             | 22.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.2 PK                 | 74.0           | -26.8       | 1.32 V             | 189                  | 35.0             | 12.2                     |
| 2                                                    | 11910.00        | 35.8 AV                 | 54.0           | -18.2       | 1.32 V             | 189                  | 23.6             | 12.2                     |
| 3                                                    | 17865.00        | 47.9 PK                 | 74.0           | -26.1       | 1.16 V             | 160                  | 25.3             | 22.6                     |
| 4                                                    | 17865.00        | 37.4 AV                 | 54.0           | -16.6       | 1.16 V             | 160                  | 14.8             | 22.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 45 : 6175 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 47.5 PK                 | 74.0           | -26.5       | 1.78 H             | 155                  | 36.0             | 11.5                     |
| 2                                                    | 12350.00        | 35.7 AV                 | 54.0           | -18.3       | 1.78 H             | 155                  | 24.2             | 11.5                     |
| 3                                                    | 18525.00        | 50.0 PK                 | 74.0           | -24.0       | 1.35 H             | 205                  | 55.9             | -5.9                     |
| 4                                                    | 18525.00        | 39.0 AV                 | 54.0           | -15.0       | 1.35 H             | 205                  | 44.9             | -5.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 46.6 PK                 | 74.0           | -27.4       | 1.32 V             | 207                  | 35.1             | 11.5                     |
| 2                                                    | 12350.00        | 35.4 AV                 | 54.0           | -18.6       | 1.32 V             | 207                  | 23.9             | 11.5                     |
| 3                                                    | 18525.00        | 48.0 PK                 | 74.0           | -26.0       | 1.24 V             | 139                  | 53.9             | -5.9                     |
| 4                                                    | 18525.00        | 37.4 AV                 | 54.0           | -16.6       | 1.24 V             | 139                  | 43.3             | -5.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 46.8 PK                 | 88.2           | -41.4       | 1.75 H             | 145                  | 34.9             | 11.9                     |
| 2                                                    | #12830.00       | 35.4 AV                 | 68.2           | -32.8       | 1.75 H             | 145                  | 23.5             | 11.9                     |
| 3                                                    | 19245.00        | 50.1 PK                 | 74.0           | -23.9       | 1.30 H             | 220                  | 55.5             | -5.4                     |
| 4                                                    | 19245.00        | 39.3 AV                 | 54.0           | -14.7       | 1.30 H             | 220                  | 44.7             | -5.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 46.7 PK                 | 88.2           | -41.5       | 1.29 V             | 186                  | 34.8             | 11.9                     |
| 2                                                    | #12830.00       | 35.4 AV                 | 68.2           | -32.8       | 1.29 V             | 186                  | 23.5             | 11.9                     |
| 3                                                    | 19245.00        | 48.0 PK                 | 74.0           | -26.0       | 1.16 V             | 163                  | 53.4             | -5.4                     |
| 4                                                    | 19245.00        | 37.3 AV                 | 54.0           | -16.7       | 1.16 V             | 163                  | 42.7             | -5.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.2 PK                 | 88.2           | -41.0       | 1.74 H             | 129                  | 35.0             | 12.2                     |
| 2                                                    | #13070.00       | 35.5 AV                 | 68.2           | -32.7       | 1.74 H             | 129                  | 23.3             | 12.2                     |
| 3                                                    | 19605.00        | 50.3 PK                 | 74.0           | -23.7       | 1.36 H             | 230                  | 55.9             | -5.6                     |
| 4                                                    | 19605.00        | 39.2 AV                 | 54.0           | -14.8       | 1.36 H             | 230                  | 44.8             | -5.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 46.6 PK                 | 88.2           | -41.6       | 1.34 V             | 189                  | 34.4             | 12.2                     |
| 2                                                    | #13070.00       | 35.4 AV                 | 68.2           | -32.8       | 1.34 V             | 189                  | 23.2             | 12.2                     |
| 3                                                    | 19605.00        | 48.1 PK                 | 74.0           | -25.9       | 1.21 V             | 134                  | 53.7             | -5.6                     |
| 4                                                    | 19605.00        | 37.5 AV                 | 54.0           | -16.5       | 1.21 V             | 134                  | 43.1             | -5.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.



|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 149 : 6695 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 47.4 PK                 | 74.0           | -26.6       | 1.68 H             | 137                  | 33.4             | 14.0                     |
| 2                                                    | 13390.00        | 36.0 AV                 | 54.0           | -18.0       | 1.68 H             | 137                  | 22.0             | 14.0                     |
| 3                                                    | 20085.00        | 50.3 PK                 | 74.0           | -23.7       | 1.38 H             | 215                  | 55.3             | -5.0                     |
| 4                                                    | 20085.00        | 39.2 AV                 | 54.0           | -14.8       | 1.38 H             | 215                  | 44.2             | -5.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 47.0 PK                 | 74.0           | -27.0       | 1.35 V             | 205                  | 33.0             | 14.0                     |
| 2                                                    | 13390.00        | 35.3 AV                 | 54.0           | -18.7       | 1.35 V             | 205                  | 21.3             | 14.0                     |
| 3                                                    | 20085.00        | 48.4 PK                 | 74.0           | -25.6       | 1.24 V             | 134                  | 53.4             | -5.0                     |
| 4                                                    | 20085.00        | 37.6 AV                 | 54.0           | -16.4       | 1.24 V             | 134                  | 42.6             | -5.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 181 : 6855 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 47.6 PK                 | 88.2           | -40.6       | 1.76 H             | 128                  | 33.9             | 13.7                     |
| 2                                                    | #13710.00       | 36.1 AV                 | 68.2           | -32.1       | 1.76 H             | 128                  | 22.4             | 13.7                     |
| 3                                                    | 20565.00        | 50.0 PK                 | 74.0           | -24.0       | 1.32 H             | 232                  | 54.3             | -4.3                     |
| 4                                                    | 20565.00        | 38.8 AV                 | 54.0           | -15.2       | 1.32 H             | 232                  | 43.1             | -4.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 47.5 PK                 | 88.2           | -40.7       | 1.39 V             | 184                  | 33.8             | 13.7                     |
| 2                                                    | #13710.00       | 35.9 AV                 | 68.2           | -32.3       | 1.39 V             | 184                  | 22.2             | 13.7                     |
| 3                                                    | 20565.00        | 48.7 PK                 | 74.0           | -25.3       | 1.25 V             | 157                  | 53.0             | -4.3                     |
| 4                                                    | 20565.00        | 38.0 AV                 | 54.0           | -16.0       | 1.25 V             | 157                  | 42.3             | -4.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 3 : 5965 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11930.00        | 47.1 PK                 | 74.0           | -26.9       | 1.69 H             | 151                  | 34.9             | 12.2                     |
| 2                                                    | 11930.00        | 35.5 AV                 | 54.0           | -18.5       | 1.69 H             | 151                  | 23.3             | 12.2                     |
| 3                                                    | 17895.00        | 50.3 PK                 | 74.0           | -23.7       | 1.34 H             | 207                  | 27.0             | 23.3                     |
| 4                                                    | 17895.00        | 39.1 AV                 | 54.0           | -14.9       | 1.34 H             | 207                  | 15.8             | 23.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11930.00        | 46.6 PK                 | 74.0           | -27.4       | 1.33 V             | 203                  | 34.4             | 12.2                     |
| 2                                                    | 11930.00        | 35.4 AV                 | 54.0           | -18.6       | 1.33 V             | 203                  | 23.2             | 12.2                     |
| 3                                                    | 17895.00        | 47.8 PK                 | 74.0           | -26.2       | 1.22 V             | 163                  | 24.5             | 23.3                     |
| 4                                                    | 17895.00        | 37.3 AV                 | 54.0           | -16.7       | 1.22 V             | 163                  | 14.0             | 23.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 43 : 6165 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12330.00        | 47.8 PK                 | 74.0           | -26.2       | 1.77 H             | 155                  | 36.2             | 11.6                     |
| 2                                                    | 12330.00        | 36.0 AV                 | 54.0           | -18.0       | 1.77 H             | 155                  | 24.4             | 11.6                     |
| 3                                                    | 18495.00        | 49.4 PK                 | 74.0           | -24.6       | 1.35 H             | 228                  | 55.2             | -5.8                     |
| 4                                                    | 18495.00        | 38.5 AV                 | 54.0           | -15.5       | 1.35 H             | 228                  | 44.3             | -5.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12330.00        | 46.5 PK                 | 74.0           | -27.5       | 1.33 V             | 210                  | 34.9             | 11.6                     |
| 2                                                    | 12330.00        | 35.2 AV                 | 54.0           | -18.8       | 1.33 V             | 210                  | 23.6             | 11.6                     |
| 3                                                    | 18495.00        | 47.6 PK                 | 74.0           | -26.4       | 1.24 V             | 156                  | 53.4             | -5.8                     |
| 4                                                    | 18495.00        | 37.1 AV                 | 54.0           | -16.9       | 1.24 V             | 156                  | 42.9             | -5.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 91 : 6405 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12810.00       | 47.6 PK                 | 88.2           | -40.6       | 1.74 H             | 132                  | 35.8             | 11.8                     |
| 2                                                    | #12810.00       | 36.2 AV                 | 68.2           | -32.0       | 1.74 H             | 132                  | 24.4             | 11.8                     |
| 3                                                    | 19215.00        | 50.3 PK                 | 74.0           | -23.7       | 1.34 H             | 234                  | 55.8             | -5.5                     |
| 4                                                    | 19215.00        | 38.9 AV                 | 54.0           | -15.1       | 1.34 H             | 234                  | 44.4             | -5.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12810.00       | 47.2 PK                 | 88.2           | -41.0       | 1.29 V             | 202                  | 35.4             | 11.8                     |
| 2                                                    | #12810.00       | 35.5 AV                 | 68.2           | -32.7       | 1.29 V             | 202                  | 23.7             | 11.8                     |
| 3                                                    | 19215.00        | 48.1 PK                 | 74.0           | -25.9       | 1.15 V             | 149                  | 53.6             | -5.5                     |
| 4                                                    | 19215.00        | 37.6 AV                 | 54.0           | -16.4       | 1.15 V             | 149                  | 43.1             | -5.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 123 : 6565 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13130.00       | 47.4 PK                 | 88.2           | -40.8       | 1.74 H             | 141                  | 35.1             | 12.3                     |
| 2                                                    | #13130.00       | 35.8 AV                 | 68.2           | -32.4       | 1.74 H             | 141                  | 23.5             | 12.3                     |
| 3                                                    | 19695.00        | 49.9 PK                 | 74.0           | -24.1       | 1.38 H             | 214                  | 55.0             | -5.1                     |
| 4                                                    | 19695.00        | 38.5 AV                 | 54.0           | -15.5       | 1.38 H             | 214                  | 43.6             | -5.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13130.00       | 46.9 PK                 | 88.2           | -41.3       | 1.39 V             | 210                  | 34.6             | 12.3                     |
| 2                                                    | #13130.00       | 35.3 AV                 | 68.2           | -32.9       | 1.39 V             | 210                  | 23.0             | 12.3                     |
| 3                                                    | 19695.00        | 48.5 PK                 | 74.0           | -25.5       | 1.22 V             | 138                  | 53.6             | -5.1                     |
| 4                                                    | 19695.00        | 37.4 AV                 | 54.0           | -16.6       | 1.22 V             | 138                  | 42.5             | -5.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT40) | <b>Channel</b>                           | CH 155 : 6725 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13450.00       | 47.7 PK                 | 88.2           | -40.5       | 1.79 H             | 140                  | 33.7             | 14.0                     |
| 2                                                    | #13450.00       | 36.3 AV                 | 68.2           | -31.9       | 1.79 H             | 140                  | 22.3             | 14.0                     |
| 3                                                    | 20175.00        | 49.7 PK                 | 74.0           | -24.3       | 1.35 H             | 221                  | 54.4             | -4.7                     |
| 4                                                    | 20175.00        | 38.6 AV                 | 54.0           | -15.4       | 1.35 H             | 221                  | 43.3             | -4.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13450.00       | 47.0 PK                 | 88.2           | -41.2       | 1.28 V             | 195                  | 33.0             | 14.0                     |
| 2                                                    | #13450.00       | 35.6 AV                 | 68.2           | -32.6       | 1.28 V             | 195                  | 21.6             | 14.0                     |
| 3                                                    | 20175.00        | 48.0 PK                 | 74.0           | -26.0       | 1.20 V             | 163                  | 52.7             | -4.7                     |
| 4                                                    | 20175.00        | 37.1 AV                 | 54.0           | -16.9       | 1.20 V             | 163                  | 41.8             | -4.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                      |                  |                               |                                                                      |
|----------------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode              | 802.11be (EHT40) | Channel                       | CH 179 : 6845 MHz                                                    |
| Frequency Range      | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power (System) | 120 Vac, 60 Hz   | Environmental Conditions      | 21 °C, 65 % RH                                                       |
| Tested By            | Willy Lin        |                               |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13690.00       | 47.4 PK                 | 88.2           | -40.8       | 1.79 H             | 136                  | 33.7             | 13.7                     |
| 2                                                    | #13690.00       | 35.6 AV                 | 68.2           | -32.6       | 1.79 H             | 136                  | 21.9             | 13.7                     |
| 3                                                    | 20535.00        | 50.2 PK                 | 74.0           | -23.8       | 1.40 H             | 212                  | 54.5             | -4.3                     |
| 4                                                    | 20535.00        | 39.2 AV                 | 54.0           | -14.8       | 1.40 H             | 212                  | 43.5             | -4.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13690.00       | 47.4 PK                 | 88.2           | -40.8       | 1.35 V             | 210                  | 33.7             | 13.7                     |
| 2                                                    | #13690.00       | 36.0 AV                 | 68.2           | -32.2       | 1.35 V             | 210                  | 22.3             | 13.7                     |
| 3                                                    | 20535.00        | 48.6 PK                 | 74.0           | -25.4       | 1.17 V             | 163                  | 52.9             | -4.3                     |
| 4                                                    | 20535.00        | 37.7 AV                 | 54.0           | -16.3       | 1.17 V             | 163                  | 42.0             | -4.3                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.



|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 7 : 5985 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11970.00        | 47.8 PK                 | 74.0           | -26.2       | 1.78 H             | 155                  | 35.6             | 12.2                     |
| 2                                                    | 11970.00        | 35.9 AV                 | 54.0           | -18.1       | 1.78 H             | 155                  | 23.7             | 12.2                     |
| 3                                                    | 17955.00        | 50.0 PK                 | 74.0           | -24.0       | 1.32 H             | 225                  | 24.5             | 25.5                     |
| 4                                                    | 17955.00        | 38.7 AV                 | 54.0           | -15.3       | 1.32 H             | 225                  | 13.2             | 25.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11970.00        | 46.6 PK                 | 74.0           | -27.4       | 1.39 V             | 194                  | 34.4             | 12.2                     |
| 2                                                    | 11970.00        | 35.4 AV                 | 54.0           | -18.6       | 1.39 V             | 194                  | 23.2             | 12.2                     |
| 3                                                    | 17955.00        | 48.0 PK                 | 74.0           | -26.0       | 1.19 V             | 136                  | 22.5             | 25.5                     |
| 4                                                    | 17955.00        | 37.4 AV                 | 54.0           | -16.6       | 1.19 V             | 136                  | 11.9             | 25.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 39 : 6145 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12290.00        | 47.1 PK                 | 74.0           | -26.9       | 1.78 H             | 142                  | 35.4             | 11.7                     |
| 2                                                    | 12290.00        | 35.5 AV                 | 54.0           | -18.5       | 1.78 H             | 142                  | 23.8             | 11.7                     |
| 3                                                    | 18435.00        | 49.9 PK                 | 74.0           | -24.1       | 1.41 H             | 232                  | 55.8             | -5.9                     |
| 4                                                    | 18435.00        | 39.0 AV                 | 54.0           | -15.0       | 1.41 H             | 232                  | 44.9             | -5.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12290.00        | 47.5 PK                 | 74.0           | -26.5       | 1.39 V             | 201                  | 35.8             | 11.7                     |
| 2                                                    | 12290.00        | 35.8 AV                 | 54.0           | -18.2       | 1.39 V             | 201                  | 24.1             | 11.7                     |
| 3                                                    | 18435.00        | 48.6 PK                 | 74.0           | -25.4       | 1.22 V             | 145                  | 54.5             | -5.9                     |
| 4                                                    | 18435.00        | 37.8 AV                 | 54.0           | -16.2       | 1.22 V             | 145                  | 43.7             | -5.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 87 : 6385 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12770.00       | 47.3 PK                 | 88.2           | -40.9       | 1.76 H             | 143                  | 35.5             | 11.8                     |
| 2                                                    | #12770.00       | 36.0 AV                 | 68.2           | -32.2       | 1.76 H             | 143                  | 24.2             | 11.8                     |
| 3                                                    | 19155.00        | 49.9 PK                 | 74.0           | -24.1       | 1.30 H             | 220                  | 55.4             | -5.5                     |
| 4                                                    | 19155.00        | 38.5 AV                 | 54.0           | -15.5       | 1.30 H             | 220                  | 44.0             | -5.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12770.00       | 47.0 PK                 | 88.2           | -41.2       | 1.36 V             | 198                  | 35.2             | 11.8                     |
| 2                                                    | #12770.00       | 35.6 AV                 | 68.2           | -32.6       | 1.36 V             | 198                  | 23.8             | 11.8                     |
| 3                                                    | 19155.00        | 49.0 PK                 | 74.0           | -25.0       | 1.25 V             | 134                  | 54.5             | -5.5                     |
| 4                                                    | 19155.00        | 38.0 AV                 | 54.0           | -16.0       | 1.25 V             | 134                  | 43.5             | -5.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 135 : 6625 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13250.00        | 46.8 PK                 | 74.0           | -27.2       | 1.75 H             | 148                  | 33.9             | 12.9                     |
| 2                                                    | 13250.00        | 35.5 AV                 | 54.0           | -18.5       | 1.75 H             | 148                  | 22.6             | 12.9                     |
| 3                                                    | 19875.00        | 49.8 PK                 | 74.0           | -24.2       | 1.31 H             | 224                  | 55.0             | -5.2                     |
| 4                                                    | 19875.00        | 39.0 AV                 | 54.0           | -15.0       | 1.31 H             | 224                  | 44.2             | -5.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13250.00        | 46.6 PK                 | 74.0           | -27.4       | 1.30 V             | 198                  | 33.7             | 12.9                     |
| 2                                                    | 13250.00        | 35.1 AV                 | 54.0           | -18.9       | 1.30 V             | 198                  | 22.2             | 12.9                     |
| 3                                                    | 19875.00        | 47.8 PK                 | 74.0           | -26.2       | 1.25 V             | 165                  | 53.0             | -5.2                     |
| 4                                                    | 19875.00        | 37.1 AV                 | 54.0           | -16.9       | 1.25 V             | 165                  | 42.3             | -5.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 151 : 6705 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13410.00       | 47.1 PK                 | 88.2           | -41.1       | 1.70 H             | 138                  | 33.1             | 14.0                     |
| 2                                                    | #13410.00       | 35.7 AV                 | 68.2           | -32.5       | 1.70 H             | 138                  | 21.7             | 14.0                     |
| 3                                                    | 20115.00        | 49.8 PK                 | 74.0           | -24.2       | 1.33 H             | 228                  | 54.7             | -4.9                     |
| 4                                                    | 20115.00        | 38.5 AV                 | 54.0           | -15.5       | 1.33 H             | 228                  | 43.4             | -4.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13410.00       | 47.4 PK                 | 88.2           | -40.8       | 1.34 V             | 200                  | 33.4             | 14.0                     |
| 2                                                    | #13410.00       | 36.0 AV                 | 68.2           | -32.2       | 1.34 V             | 200                  | 22.0             | 14.0                     |
| 3                                                    | 20115.00        | 48.5 PK                 | 74.0           | -25.5       | 1.17 V             | 161                  | 53.4             | -4.9                     |
| 4                                                    | 20115.00        | 37.8 AV                 | 54.0           | -16.2       | 1.17 V             | 161                  | 42.7             | -4.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                  |                                          |                                                                      |
|-----------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) | <b>Channel</b>                           | CH 167 : 6785 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13570.00       | 47.8 PK                 | 88.2           | -40.4       | 1.74 H             | 135                  | 33.9             | 13.9                     |
| 2                                                    | #13570.00       | 36.2 AV                 | 68.2           | -32.0       | 1.74 H             | 135                  | 22.3             | 13.9                     |
| 3                                                    | 20355.00        | 50.3 PK                 | 74.0           | -23.7       | 1.41 H             | 224                  | 54.7             | -4.4                     |
| 4                                                    | 20355.00        | 39.3 AV                 | 54.0           | -14.7       | 1.41 H             | 224                  | 43.7             | -4.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13570.00       | 47.0 PK                 | 88.2           | -41.2       | 1.30 V             | 190                  | 33.1             | 13.9                     |
| 2                                                    | #13570.00       | 35.6 AV                 | 68.2           | -32.6       | 1.30 V             | 190                  | 21.7             | 13.9                     |
| 3                                                    | 20355.00        | 47.9 PK                 | 74.0           | -26.1       | 1.14 V             | 160                  | 52.3             | -4.4                     |
| 4                                                    | 20355.00        | 37.3 AV                 | 54.0           | -16.7       | 1.14 V             | 160                  | 41.7             | -4.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                   |                                          |                                                                      |
|-----------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 15 : 6025 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 47.3 PK                 | 74.0           | -26.7       | 1.69 H             | 146                  | 35.1             | 12.2                     |
| 2                                                    | 12050.00        | 35.8 AV                 | 54.0           | -18.2       | 1.69 H             | 146                  | 23.6             | 12.2                     |
| 3                                                    | 18075.00        | 49.6 PK                 | 74.0           | -24.4       | 1.39 H             | 213                  | 55.4             | -5.8                     |
| 4                                                    | 18075.00        | 38.5 AV                 | 54.0           | -15.5       | 1.39 H             | 213                  | 44.3             | -5.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 47.0 PK                 | 74.0           | -27.0       | 1.28 V             | 187                  | 34.8             | 12.2                     |
| 2                                                    | 12050.00        | 35.5 AV                 | 54.0           | -18.5       | 1.28 V             | 187                  | 23.3             | 12.2                     |
| 3                                                    | 18075.00        | 48.2 PK                 | 74.0           | -25.8       | 1.20 V             | 152                  | 54.0             | -5.8                     |
| 4                                                    | 18075.00        | 37.1 AV                 | 54.0           | -16.9       | 1.20 V             | 152                  | 42.9             | -5.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                   |                                          |                                                                      |
|-----------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 47 : 6185 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12370.00        | 47.7 PK                 | 74.0           | -26.3       | 1.69 H             | 159                  | 36.3             | 11.4                     |
| 2                                                    | 12370.00        | 36.3 AV                 | 54.0           | -17.7       | 1.69 H             | 159                  | 24.9             | 11.4                     |
| 3                                                    | 18555.00        | 50.2 PK                 | 74.0           | -23.8       | 1.37 H             | 205                  | 56.0             | -5.8                     |
| 4                                                    | 18555.00        | 39.0 AV                 | 54.0           | -15.0       | 1.37 H             | 205                  | 44.8             | -5.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12370.00        | 47.1 PK                 | 74.0           | -26.9       | 1.39 V             | 198                  | 35.7             | 11.4                     |
| 2                                                    | 12370.00        | 35.8 AV                 | 54.0           | -18.2       | 1.39 V             | 198                  | 24.4             | 11.4                     |
| 3                                                    | 18555.00        | 48.2 PK                 | 74.0           | -25.8       | 1.20 V             | 164                  | 54.0             | -5.8                     |
| 4                                                    | 18555.00        | 37.6 AV                 | 54.0           | -16.4       | 1.20 V             | 164                  | 43.4             | -5.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.



|                             |                   |                                          |                                                                      |
|-----------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 79 : 6345 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12690.00        | 47.2 PK                 | 74.0           | -26.8       | 1.74 H             | 159                  | 35.3             | 11.9                     |
| 2                                                    | 12690.00        | 35.5 AV                 | 54.0           | -18.5       | 1.74 H             | 159                  | 23.6             | 11.9                     |
| 3                                                    | 19035.00        | 50.7 PK                 | 74.0           | -23.3       | 1.34 H             | 223                  | 56.3             | -5.6                     |
| 4                                                    | 19035.00        | 39.3 AV                 | 54.0           | -14.7       | 1.34 H             | 223                  | 44.9             | -5.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12690.00        | 46.5 PK                 | 74.0           | -27.5       | 1.31 V             | 199                  | 34.6             | 11.9                     |
| 2                                                    | 12690.00        | 35.4 AV                 | 54.0           | -18.6       | 1.31 V             | 199                  | 23.5             | 11.9                     |
| 3                                                    | 19035.00        | 48.6 PK                 | 74.0           | -25.4       | 1.24 V             | 141                  | 54.2             | -5.6                     |
| 4                                                    | 19035.00        | 37.9 AV                 | 54.0           | -16.1       | 1.24 V             | 141                  | 43.5             | -5.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                   |                                          |                                                                      |
|-----------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160) | <b>Channel</b>                           | CH 143 : 6665 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 47.5 PK                 | 74.0           | -26.5       | 1.78 H             | 149                  | 33.8             | 13.7                     |
| 2                                                    | 13330.00        | 35.6 AV                 | 54.0           | -18.4       | 1.78 H             | 149                  | 21.9             | 13.7                     |
| 3                                                    | 19995.00        | 49.9 PK                 | 74.0           | -24.1       | 1.33 H             | 211                  | 55.0             | -5.1                     |
| 4                                                    | 19995.00        | 39.0 AV                 | 54.0           | -15.0       | 1.33 H             | 211                  | 44.1             | -5.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 47.6 PK                 | 74.0           | -26.4       | 1.37 V             | 201                  | 33.9             | 13.7                     |
| 2                                                    | 13330.00        | 36.0 AV                 | 54.0           | -18.0       | 1.37 V             | 201                  | 22.3             | 13.7                     |
| 3                                                    | 19995.00        | 48.3 PK                 | 74.0           | -25.7       | 1.16 V             | 145                  | 53.4             | -5.1                     |
| 4                                                    | 19995.00        | 37.6 AV                 | 54.0           | -16.4       | 1.16 V             | 145                  | 42.7             | -5.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                   |                                          |                                                                      |
|-----------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT320) | <b>Channel</b>                           | CH 31 : 6105 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12210.00        | 48.0 PK                 | 74.0           | -26.0       | 1.79 H             | 155                  | 35.9             | 12.1                     |
| 2                                                    | 12210.00        | 36.3 AV                 | 54.0           | -17.7       | 1.79 H             | 155                  | 24.2             | 12.1                     |
| 3                                                    | 18315.00        | 49.7 PK                 | 74.0           | -24.3       | 1.36 H             | 206                  | 55.6             | -5.9                     |
| 4                                                    | 18315.00        | 38.8 AV                 | 54.0           | -15.2       | 1.36 H             | 206                  | 44.7             | -5.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12210.00        | 47.0 PK                 | 74.0           | -27.0       | 1.38 V             | 181                  | 34.9             | 12.1                     |
| 2                                                    | 12210.00        | 35.5 AV                 | 54.0           | -18.5       | 1.38 V             | 181                  | 23.4             | 12.1                     |
| 3                                                    | 18315.00        | 48.4 PK                 | 74.0           | -25.6       | 1.18 V             | 162                  | 54.3             | -5.9                     |
| 4                                                    | 18315.00        | 37.5 AV                 | 54.0           | -16.5       | 1.18 V             | 162                  | 43.4             | -5.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                   |                                          |                                                                      |
|-----------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT320) | <b>Channel</b>                           | CH 63 : 6265 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=2 kHz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 21 °C, 65 % RH                                                       |
| <b>Tested By</b>            | Willy Lin         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12530.00        | 47.8 PK                 | 74.0           | -26.2       | 1.79 H             | 135                  | 36.0             | 11.8                     |
| 2                                                    | 12530.00        | 36.0 AV                 | 54.0           | -18.0       | 1.79 H             | 135                  | 24.2             | 11.8                     |
| 3                                                    | 18795.00        | 50.1 PK                 | 74.0           | -23.9       | 1.35 H             | 215                  | 55.8             | -5.7                     |
| 4                                                    | 18795.00        | 39.1 AV                 | 54.0           | -14.9       | 1.35 H             | 215                  | 44.8             | -5.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12530.00        | 47.0 PK                 | 74.0           | -27.0       | 1.31 V             | 193                  | 35.2             | 11.8                     |
| 2                                                    | 12530.00        | 35.7 AV                 | 54.0           | -18.3       | 1.31 V             | 193                  | 23.9             | 11.8                     |
| 3                                                    | 18795.00        | 48.5 PK                 | 74.0           | -25.5       | 1.21 V             | 147                  | 54.2             | -5.7                     |
| 4                                                    | 18795.00        | 37.5 AV                 | 54.0           | -16.5       | 1.21 V             | 147                  | 43.2             | -5.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 2 : 5935 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22 °C, 64 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11920.00        | 47.6 PK                 | 74.0           | -26.4       | 1.78 H             | 153                  | 35.4             | 12.2                     |
| 2                                                    | 11920.00        | 36.1 AV                 | 54.0           | -17.9       | 1.78 H             | 153                  | 23.9             | 12.2                     |
| 3                                                    | 17880.00        | 49.2 PK                 | 74.0           | -24.8       | 1.31 H             | 230                  | 26.2             | 23.0                     |
| 4                                                    | 17880.00        | 38.2 AV                 | 54.0           | -15.8       | 1.31 H             | 230                  | 15.2             | 23.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11920.00        | 47.5 PK                 | 74.0           | -26.5       | 1.35 V             | 187                  | 35.3             | 12.2                     |
| 2                                                    | 11920.00        | 36.0 AV                 | 54.0           | -18.0       | 1.35 V             | 187                  | 23.8             | 12.2                     |
| 3                                                    | 17880.00        | 47.6 PK                 | 74.0           | -26.4       | 1.25 V             | 164                  | 24.6             | 23.0                     |
| 4                                                    | 17880.00        | 36.9 AV                 | 54.0           | -17.1       | 1.25 V             | 164                  | 13.9             | 23.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 20 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.2 PK                 | 74.0           | -26.8       | 1.75 H             | 150                  | 35.0             | 12.2                     |
| 2                                                    | 11910.00        | 35.8 AV                 | 54.0           | -18.2       | 1.75 H             | 150                  | 23.6             | 12.2                     |
| 3                                                    | 17865.00        | 49.4 PK                 | 74.0           | -24.6       | 1.31 H             | 225                  | 26.8             | 22.6                     |
| 4                                                    | 17865.00        | 38.4 AV                 | 54.0           | -15.6       | 1.31 H             | 225                  | 15.8             | 22.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 46.9 PK                 | 74.0           | -27.1       | 1.32 V             | 179                  | 34.7             | 12.2                     |
| 2                                                    | 11910.00        | 35.5 AV                 | 54.0           | -18.5       | 1.32 V             | 179                  | 23.3             | 12.2                     |
| 3                                                    | 17865.00        | 48.4 PK                 | 74.0           | -25.6       | 1.23 V             | 151                  | 25.8             | 22.6                     |
| 4                                                    | 17865.00        | 37.4 AV                 | 54.0           | -16.6       | 1.23 V             | 151                  | 14.8             | 22.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 45 : 6175 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 20 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 47.6 PK                 | 74.0           | -26.4       | 1.75 H             | 157                  | 36.1             | 11.5                     |
| 2                                                    | 12350.00        | 35.8 AV                 | 54.0           | -18.2       | 1.75 H             | 157                  | 24.3             | 11.5                     |
| 3                                                    | 18525.00        | 50.4 PK                 | 74.0           | -23.6       | 1.34 H             | 207                  | 56.3             | -5.9                     |
| 4                                                    | 18525.00        | 39.1 AV                 | 54.0           | -14.9       | 1.34 H             | 207                  | 45.0             | -5.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 47.7 PK                 | 74.0           | -26.3       | 1.38 V             | 199                  | 36.2             | 11.5                     |
| 2                                                    | 12350.00        | 36.1 AV                 | 54.0           | -17.9       | 1.38 V             | 199                  | 24.6             | 11.5                     |
| 3                                                    | 18525.00        | 48.3 PK                 | 74.0           | -25.7       | 1.22 V             | 155                  | 54.2             | -5.9                     |
| 4                                                    | 18525.00        | 37.6 AV                 | 54.0           | -16.4       | 1.22 V             | 155                  | 43.5             | -5.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 20 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 47.5 PK                 | 88.2           | -40.7       | 1.78 H             | 152                  | 35.6             | 11.9                     |
| 2                                                    | #12830.00       | 35.8 AV                 | 68.2           | -32.4       | 1.78 H             | 152                  | 23.9             | 11.9                     |
| 3                                                    | 19245.00        | 49.8 PK                 | 74.0           | -24.2       | 1.29 H             | 223                  | 55.2             | -5.4                     |
| 4                                                    | 19245.00        | 38.5 AV                 | 54.0           | -15.5       | 1.29 H             | 223                  | 43.9             | -5.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 47.0 PK                 | 88.2           | -41.2       | 1.28 V             | 203                  | 35.1             | 11.9                     |
| 2                                                    | #12830.00       | 35.7 AV                 | 68.2           | -32.5       | 1.28 V             | 203                  | 23.8             | 11.9                     |
| 3                                                    | 19245.00        | 48.7 PK                 | 74.0           | -25.3       | 1.13 V             | 138                  | 54.1             | -5.4                     |
| 4                                                    | 19245.00        | 37.8 AV                 | 54.0           | -16.2       | 1.13 V             | 138                  | 43.2             | -5.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.



|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 20 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.1 PK                 | 88.2           | -41.1       | 1.71 H             | 134                  | 34.9             | 12.2                     |
| 2                                                    | #13070.00       | 35.3 AV                 | 68.2           | -32.9       | 1.71 H             | 134                  | 23.1             | 12.2                     |
| 3                                                    | 19605.00        | 50.0 PK                 | 74.0           | -24.0       | 1.38 H             | 211                  | 55.6             | -5.6                     |
| 4                                                    | 19605.00        | 39.0 AV                 | 54.0           | -15.0       | 1.38 H             | 211                  | 44.6             | -5.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.4 PK                 | 88.2           | -40.8       | 1.27 V             | 197                  | 35.2             | 12.2                     |
| 2                                                    | #13070.00       | 36.0 AV                 | 68.2           | -32.2       | 1.27 V             | 197                  | 23.8             | 12.2                     |
| 3                                                    | 19605.00        | 48.4 PK                 | 74.0           | -25.6       | 1.14 V             | 164                  | 54.0             | -5.6                     |
| 4                                                    | 19605.00        | 37.4 AV                 | 54.0           | -16.6       | 1.14 V             | 164                  | 43.0             | -5.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 149 : 6695 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 20 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 47.2 PK                 | 74.0           | -26.8       | 1.79 H             | 139                  | 33.2             | 14.0                     |
| 2                                                    | 13390.00        | 35.8 AV                 | 54.0           | -18.2       | 1.79 H             | 139                  | 21.8             | 14.0                     |
| 3                                                    | 20085.00        | 50.2 PK                 | 74.0           | -23.8       | 1.34 H             | 226                  | 55.2             | -5.0                     |
| 4                                                    | 20085.00        | 39.0 AV                 | 54.0           | -15.0       | 1.34 H             | 226                  | 44.0             | -5.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 46.4 PK                 | 74.0           | -27.6       | 1.29 V             | 200                  | 32.4             | 14.0                     |
| 2                                                    | 13390.00        | 35.1 AV                 | 54.0           | -18.9       | 1.29 V             | 200                  | 21.1             | 14.0                     |
| 3                                                    | 20085.00        | 48.2 PK                 | 74.0           | -25.8       | 1.21 V             | 137                  | 53.2             | -5.0                     |
| 4                                                    | 20085.00        | 37.4 AV                 | 54.0           | -16.6       | 1.21 V             | 137                  | 42.4             | -5.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 181 : 6855 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 20 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 47.5 PK                 | 88.2           | -40.7       | 1.70 H             | 132                  | 33.8             | 13.7                     |
| 2                                                    | #13710.00       | 35.8 AV                 | 68.2           | -32.4       | 1.70 H             | 132                  | 22.1             | 13.7                     |
| 3                                                    | 20565.00        | 49.9 PK                 | 74.0           | -24.1       | 1.31 H             | 235                  | 54.2             | -4.3                     |
| 4                                                    | 20565.00        | 38.9 AV                 | 54.0           | -15.1       | 1.31 H             | 235                  | 43.2             | -4.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 46.5 PK                 | 88.2           | -41.7       | 1.39 V             | 210                  | 32.8             | 13.7                     |
| 2                                                    | #13710.00       | 35.3 AV                 | 68.2           | -32.9       | 1.39 V             | 210                  | 21.6             | 13.7                     |
| 3                                                    | 20565.00        | 48.4 PK                 | 74.0           | -25.6       | 1.13 V             | 139                  | 52.7             | -4.3                     |
| 4                                                    | 20565.00        | 37.4 AV                 | 54.0           | -16.6       | 1.13 V             | 139                  | 41.7             | -4.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 2 : 5935 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22 °C, 64 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11920.00        | 47.8 PK                 | 74.0           | -26.2       | 1.76 H             | 159                  | 35.6             | 12.2                     |
| 2                                                    | 11920.00        | 36.3 AV                 | 54.0           | -17.7       | 1.76 H             | 159                  | 24.1             | 12.2                     |
| 3                                                    | 17880.00        | 49.9 PK                 | 74.0           | -24.1       | 1.40 H             | 245                  | 26.9             | 23.0                     |
| 4                                                    | 17880.00        | 38.8 AV                 | 54.0           | -15.2       | 1.40 H             | 245                  | 15.8             | 23.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11920.00        | 46.1 PK                 | 74.0           | -27.9       | 1.37 V             | 180                  | 33.9             | 12.2                     |
| 2                                                    | 11920.00        | 34.9 AV                 | 54.0           | -19.1       | 1.37 V             | 180                  | 22.7             | 12.2                     |
| 3                                                    | 17880.00        | 48.2 PK                 | 74.0           | -25.8       | 1.13 V             | 136                  | 25.2             | 23.0                     |
| 4                                                    | 17880.00        | 37.5 AV                 | 54.0           | -16.5       | 1.13 V             | 136                  | 14.5             | 23.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 20 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.8 PK                 | 74.0           | -26.2       | 1.76 H             | 131                  | 35.6             | 12.2                     |
| 2                                                    | 11910.00        | 35.9 AV                 | 54.0           | -18.1       | 1.76 H             | 131                  | 23.7             | 12.2                     |
| 3                                                    | 17865.00        | 50.2 PK                 | 74.0           | -23.8       | 1.39 H             | 233                  | 27.6             | 22.6                     |
| 4                                                    | 17865.00        | 39.1 AV                 | 54.0           | -14.9       | 1.39 H             | 233                  | 16.5             | 22.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 47.2 PK                 | 74.0           | -26.8       | 1.31 V             | 183                  | 35.0             | 12.2                     |
| 2                                                    | 11910.00        | 35.7 AV                 | 54.0           | -18.3       | 1.31 V             | 183                  | 23.5             | 12.2                     |
| 3                                                    | 17865.00        | 47.9 PK                 | 74.0           | -26.1       | 1.18 V             | 137                  | 25.3             | 22.6                     |
| 4                                                    | 17865.00        | 37.1 AV                 | 54.0           | -16.9       | 1.18 V             | 137                  | 14.5             | 22.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 45 : 6175 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 20 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 47.5 PK                 | 74.0           | -26.5       | 1.74 H             | 160                  | 36.0             | 11.5                     |
| 2                                                    | 12350.00        | 36.0 AV                 | 54.0           | -18.0       | 1.74 H             | 160                  | 24.5             | 11.5                     |
| 3                                                    | 18525.00        | 50.7 PK                 | 74.0           | -23.3       | 1.39 H             | 206                  | 56.6             | -5.9                     |
| 4                                                    | 18525.00        | 39.4 AV                 | 54.0           | -14.6       | 1.39 H             | 206                  | 45.3             | -5.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 47.3 PK                 | 74.0           | -26.7       | 1.37 V             | 207                  | 35.8             | 11.5                     |
| 2                                                    | 12350.00        | 35.8 AV                 | 54.0           | -18.2       | 1.37 V             | 207                  | 24.3             | 11.5                     |
| 3                                                    | 18525.00        | 47.8 PK                 | 74.0           | -26.2       | 1.15 V             | 136                  | 53.7             | -5.9                     |
| 4                                                    | 18525.00        | 37.3 AV                 | 54.0           | -16.7       | 1.15 V             | 136                  | 43.2             | -5.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 20 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 47.5 PK                 | 88.2           | -40.7       | 1.73 H             | 146                  | 35.6             | 11.9                     |
| 2                                                    | #12830.00       | 36.0 AV                 | 68.2           | -32.2       | 1.73 H             | 146                  | 24.1             | 11.9                     |
| 3                                                    | 19245.00        | 50.0 PK                 | 74.0           | -24.0       | 1.33 H             | 215                  | 55.4             | -5.4                     |
| 4                                                    | 19245.00        | 38.7 AV                 | 54.0           | -15.3       | 1.33 H             | 215                  | 44.1             | -5.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 47.2 PK                 | 88.2           | -41.0       | 1.34 V             | 186                  | 35.3             | 11.9                     |
| 2                                                    | #12830.00       | 35.9 AV                 | 68.2           | -32.3       | 1.34 V             | 186                  | 24.0             | 11.9                     |
| 3                                                    | 19245.00        | 48.0 PK                 | 74.0           | -26.0       | 1.19 V             | 156                  | 53.4             | -5.4                     |
| 4                                                    | 19245.00        | 37.1 AV                 | 54.0           | -16.9       | 1.19 V             | 156                  | 42.5             | -5.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 20 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.4 PK                 | 88.2           | -40.8       | 1.67 H             | 131                  | 35.2             | 12.2                     |
| 2                                                    | #13070.00       | 36.1 AV                 | 68.2           | -32.1       | 1.67 H             | 131                  | 23.9             | 12.2                     |
| 3                                                    | 19605.00        | 49.6 PK                 | 74.0           | -24.4       | 1.33 H             | 224                  | 55.2             | -5.6                     |
| 4                                                    | 19605.00        | 38.8 AV                 | 54.0           | -15.2       | 1.33 H             | 224                  | 44.4             | -5.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 46.6 PK                 | 88.2           | -41.6       | 1.35 V             | 206                  | 34.4             | 12.2                     |
| 2                                                    | #13070.00       | 35.2 AV                 | 68.2           | -33.0       | 1.35 V             | 206                  | 23.0             | 12.2                     |
| 3                                                    | 19605.00        | 48.7 PK                 | 74.0           | -25.3       | 1.24 V             | 135                  | 54.3             | -5.6                     |
| 4                                                    | 19605.00        | 37.7 AV                 | 54.0           | -16.3       | 1.24 V             | 135                  | 43.3             | -5.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.



|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 149 : 6695 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 20 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 47.5 PK                 | 74.0           | -26.5       | 1.71 H             | 128                  | 33.5             | 14.0                     |
| 2                                                    | 13390.00        | 35.9 AV                 | 54.0           | -18.1       | 1.71 H             | 128                  | 21.9             | 14.0                     |
| 3                                                    | 20085.00        | 50.0 PK                 | 74.0           | -24.0       | 1.35 H             | 208                  | 55.0             | -5.0                     |
| 4                                                    | 20085.00        | 38.8 AV                 | 54.0           | -15.2       | 1.35 H             | 208                  | 43.8             | -5.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 47.3 PK                 | 74.0           | -26.7       | 1.36 V             | 210                  | 33.3             | 14.0                     |
| 2                                                    | 13390.00        | 35.8 AV                 | 54.0           | -18.2       | 1.36 V             | 210                  | 21.8             | 14.0                     |
| 3                                                    | 20085.00        | 48.0 PK                 | 74.0           | -26.0       | 1.20 V             | 135                  | 53.0             | -5.0                     |
| 4                                                    | 20085.00        | 37.2 AV                 | 54.0           | -16.8       | 1.20 V             | 135                  | 42.2             | -5.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                             |                                          |                                                                      |
|-----------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 181 : 6855 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 20 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 47.1 PK                 | 88.2           | -41.1       | 1.77 H             | 129                  | 33.4             | 13.7                     |
| 2                                                    | #13710.00       | 35.5 AV                 | 68.2           | -32.7       | 1.77 H             | 129                  | 21.8             | 13.7                     |
| 3                                                    | 20565.00        | 49.9 PK                 | 74.0           | -24.1       | 1.37 H             | 206                  | 54.2             | -4.3                     |
| 4                                                    | 20565.00        | 38.9 AV                 | 54.0           | -15.1       | 1.37 H             | 206                  | 43.2             | -4.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 46.9 PK                 | 88.2           | -41.3       | 1.38 V             | 194                  | 33.2             | 13.7                     |
| 2                                                    | #13710.00       | 35.2 AV                 | 68.2           | -33.0       | 1.38 V             | 194                  | 21.5             | 13.7                     |
| 3                                                    | 20565.00        | 47.9 PK                 | 74.0           | -26.1       | 1.21 V             | 161                  | 52.2             | -4.3                     |
| 4                                                    | 20565.00        | 37.3 AV                 | 54.0           | -16.7       | 1.21 V             | 161                  | 41.6             | -4.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 2 : 5935 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 22 °C, 64 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11920.00        | 47.4 PK                 | 74.0           | -26.6       | 1.71 H             | 146                  | 35.2             | 12.2                     |
| 2                                                    | 11920.00        | 35.9 AV                 | 54.0           | -18.1       | 1.71 H             | 146                  | 23.7             | 12.2                     |
| 3                                                    | 17880.00        | 49.9 PK                 | 74.0           | -24.1       | 1.38 H             | 250                  | 26.9             | 23.0                     |
| 4                                                    | 17880.00        | 38.9 AV                 | 54.0           | -15.1       | 1.38 H             | 250                  | 15.9             | 23.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11920.00        | 46.3 PK                 | 74.0           | -27.7       | 1.42 V             | 177                  | 34.1             | 12.2                     |
| 2                                                    | 11920.00        | 35.1 AV                 | 54.0           | -18.9       | 1.42 V             | 177                  | 22.9             | 12.2                     |
| 3                                                    | 17880.00        | 48.6 PK                 | 74.0           | -25.4       | 1.09 V             | 124                  | 25.6             | 23.0                     |
| 4                                                    | 17880.00        | 37.9 AV                 | 54.0           | -16.1       | 1.09 V             | 124                  | 14.9             | 23.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 1 : 5955 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 20 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 48.0 PK                 | 74.0           | -26.0       | 1.67 H             | 138                  | 35.8             | 12.2                     |
| 2                                                    | 11910.00        | 36.2 AV                 | 54.0           | -17.8       | 1.67 H             | 138                  | 24.0             | 12.2                     |
| 3                                                    | 17865.00        | 50.3 PK                 | 74.0           | -23.7       | 1.36 H             | 228                  | 27.7             | 22.6                     |
| 4                                                    | 17865.00        | 39.3 AV                 | 54.0           | -14.7       | 1.36 H             | 228                  | 16.7             | 22.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11910.00        | 46.9 PK                 | 74.0           | -27.1       | 1.33 V             | 204                  | 34.7             | 12.2                     |
| 2                                                    | 11910.00        | 35.3 AV                 | 54.0           | -18.7       | 1.33 V             | 204                  | 23.1             | 12.2                     |
| 3                                                    | 17865.00        | 48.5 PK                 | 74.0           | -25.5       | 1.14 V             | 147                  | 25.9             | 22.6                     |
| 4                                                    | 17865.00        | 37.9 AV                 | 54.0           | -16.1       | 1.14 V             | 147                  | 15.3             | 22.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 45 : 6175 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 20 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 47.2 PK                 | 74.0           | -26.8       | 1.70 H             | 136                  | 35.7             | 11.5                     |
| 2                                                    | 12350.00        | 35.4 AV                 | 54.0           | -18.6       | 1.70 H             | 136                  | 23.9             | 11.5                     |
| 3                                                    | 18525.00        | 50.2 PK                 | 74.0           | -23.8       | 1.34 H             | 222                  | 56.1             | -5.9                     |
| 4                                                    | 18525.00        | 39.3 AV                 | 54.0           | -14.7       | 1.34 H             | 222                  | 45.2             | -5.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12350.00        | 46.5 PK                 | 74.0           | -27.5       | 1.33 V             | 190                  | 35.0             | 11.5                     |
| 2                                                    | 12350.00        | 35.2 AV                 | 54.0           | -18.8       | 1.33 V             | 190                  | 23.7             | 11.5                     |
| 3                                                    | 18525.00        | 48.5 PK                 | 74.0           | -25.5       | 1.19 V             | 148                  | 54.4             | -5.9                     |
| 4                                                    | 18525.00        | 37.5 AV                 | 54.0           | -16.5       | 1.19 V             | 148                  | 43.4             | -5.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 93 : 6415 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 20 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 47.4 PK                 | 88.2           | -40.8       | 1.72 H             | 159                  | 35.5             | 11.9                     |
| 2                                                    | #12830.00       | 36.0 AV                 | 68.2           | -32.2       | 1.72 H             | 159                  | 24.1             | 11.9                     |
| 3                                                    | 19245.00        | 50.0 PK                 | 74.0           | -24.0       | 1.32 H             | 208                  | 55.4             | -5.4                     |
| 4                                                    | 19245.00        | 39.0 AV                 | 54.0           | -15.0       | 1.32 H             | 208                  | 44.4             | -5.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #12830.00       | 46.7 PK                 | 88.2           | -41.5       | 1.28 V             | 193                  | 34.8             | 11.9                     |
| 2                                                    | #12830.00       | 35.3 AV                 | 68.2           | -32.9       | 1.28 V             | 193                  | 23.4             | 11.9                     |
| 3                                                    | 19245.00        | 48.6 PK                 | 74.0           | -25.4       | 1.16 V             | 162                  | 54.0             | -5.4                     |
| 4                                                    | 19245.00        | 38.0 AV                 | 54.0           | -16.0       | 1.16 V             | 162                  | 43.4             | -5.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 117 : 6535 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 20 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 47.6 PK                 | 88.2           | -40.6       | 1.67 H             | 142                  | 35.4             | 12.2                     |
| 2                                                    | #13070.00       | 35.9 AV                 | 68.2           | -32.3       | 1.67 H             | 142                  | 23.7             | 12.2                     |
| 3                                                    | 19605.00        | 50.2 PK                 | 74.0           | -23.8       | 1.38 H             | 224                  | 55.8             | -5.6                     |
| 4                                                    | 19605.00        | 39.0 AV                 | 54.0           | -15.0       | 1.38 H             | 224                  | 44.6             | -5.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13070.00       | 46.9 PK                 | 88.2           | -41.3       | 1.34 V             | 188                  | 34.7             | 12.2                     |
| 2                                                    | #13070.00       | 35.3 AV                 | 68.2           | -32.9       | 1.34 V             | 188                  | 23.1             | 12.2                     |
| 3                                                    | 19605.00        | 48.6 PK                 | 74.0           | -25.4       | 1.16 V             | 136                  | 54.2             | -5.6                     |
| 4                                                    | 19605.00        | 37.5 AV                 | 54.0           | -16.5       | 1.16 V             | 136                  | 43.1             | -5.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 149 : 6695 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 20 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 47.0 PK                 | 74.0           | -27.0       | 1.75 H             | 146                  | 33.0             | 14.0                     |
| 2                                                    | 13390.00        | 35.4 AV                 | 54.0           | -18.6       | 1.75 H             | 146                  | 21.4             | 14.0                     |
| 3                                                    | 20085.00        | 50.3 PK                 | 74.0           | -23.7       | 1.41 H             | 213                  | 55.3             | -5.0                     |
| 4                                                    | 20085.00        | 39.4 AV                 | 54.0           | -14.6       | 1.41 H             | 213                  | 44.4             | -5.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13390.00        | 46.5 PK                 | 74.0           | -27.5       | 1.34 V             | 211                  | 32.5             | 14.0                     |
| 2                                                    | 13390.00        | 35.4 AV                 | 54.0           | -18.6       | 1.34 V             | 211                  | 21.4             | 14.0                     |
| 3                                                    | 20085.00        | 48.2 PK                 | 74.0           | -25.8       | 1.16 V             | 151                  | 53.2             | -5.0                     |
| 4                                                    | 20085.00        | 37.6 AV                 | 54.0           | -16.4       | 1.16 V             | 151                  | 42.6             | -5.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.



|                             |                              |                                          |                                                                      |
|-----------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 181 : 6855 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 20 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 47.4 PK                 | 88.2           | -40.8       | 1.75 H             | 143                  | 33.7             | 13.7                     |
| 2                                                    | #13710.00       | 35.8 AV                 | 68.2           | -32.4       | 1.75 H             | 143                  | 22.1             | 13.7                     |
| 3                                                    | 20565.00        | 50.2 PK                 | 74.0           | -23.8       | 1.33 H             | 204                  | 54.5             | -4.3                     |
| 4                                                    | 20565.00        | 39.2 AV                 | 54.0           | -14.8       | 1.33 H             | 204                  | 43.5             | -4.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #13710.00       | 47.3 PK                 | 88.2           | -40.9       | 1.33 V             | 210                  | 33.6             | 13.7                     |
| 2                                                    | #13710.00       | 36.0 AV                 | 68.2           | -32.2       | 1.33 V             | 210                  | 22.3             | 13.7                     |
| 3                                                    | 20565.00        | 48.8 PK                 | 74.0           | -25.2       | 1.18 V             | 162                  | 53.1             | -4.3                     |
| 4                                                    | 20565.00        | 37.8 AV                 | 54.0           | -16.2       | 1.18 V             | 162                  | 42.1             | -4.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

|                             |                                      |                                          |                                                                      |
|-----------------------------|--------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) Punctured by 20 MHz | <b>Channel</b>                           | CH 7 : 5985 MHz                                                      |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                       | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                       | <b>Environmental Conditions</b>          | 21 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                            |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11970.00        | 48.3 PK                 | 74.0           | -25.7       | 1.60 H             | 117                  | 36.1             | 12.2                     |
| 2                                                    | 11970.00        | 36.1 AV                 | 54.0           | -17.9       | 1.60 H             | 117                  | 23.9             | 12.2                     |
| 3                                                    | 17955.00        | 49.4 PK                 | 74.0           | -24.6       | 1.31 H             | 234                  | 23.9             | 25.5                     |
| 4                                                    | 17955.00        | 38.5 AV                 | 54.0           | -15.5       | 1.31 H             | 234                  | 13.0             | 25.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 11970.00        | 46.5 PK                 | 74.0           | -27.5       | 1.40 V             | 184                  | 34.3             | 12.2                     |
| 2                                                    | 11970.00        | 35.4 AV                 | 54.0           | -18.6       | 1.40 V             | 184                  | 23.2             | 12.2                     |
| 3                                                    | 17955.00        | 47.7 PK                 | 74.0           | -26.3       | 1.13 V             | 152                  | 22.2             | 25.5                     |
| 4                                                    | 17955.00        | 36.8 AV                 | 54.0           | -17.2       | 1.13 V             | 152                  | 11.3             | 25.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                      |                                          |                                                                      |
|-----------------------------|--------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT80) Punctured by 20 MHz | <b>Channel</b>                           | CH 135 : 6625 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                       | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                       | <b>Environmental Conditions</b>          | 21 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                            |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13250.00        | 48.5 PK                 | 74.0           | -25.5       | 1.61 H             | 114                  | 35.6             | 12.9                     |
| 2                                                    | 13250.00        | 36.4 AV                 | 54.0           | -17.6       | 1.61 H             | 114                  | 23.5             | 12.9                     |
| 3                                                    | 19875.00        | 49.4 PK                 | 74.0           | -24.6       | 1.37 H             | 244                  | 54.6             | -5.2                     |
| 4                                                    | 19875.00        | 38.8 AV                 | 54.0           | -15.2       | 1.37 H             | 244                  | 44.0             | -5.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13250.00        | 46.4 PK                 | 74.0           | -27.6       | 1.44 V             | 169                  | 33.5             | 12.9                     |
| 2                                                    | 13250.00        | 35.0 AV                 | 54.0           | -19.0       | 1.44 V             | 169                  | 22.1             | 12.9                     |
| 3                                                    | 19875.00        | 47.9 PK                 | 74.0           | -26.1       | 1.16 V             | 146                  | 53.1             | -5.2                     |
| 4                                                    | 19875.00        | 37.1 AV                 | 54.0           | -16.9       | 1.16 V             | 146                  | 42.3             | -5.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                          |                                          |                                                                      |
|-----------------------------|------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160)<br>Punctured by 20 MHz | <b>Channel</b>                           | CH 15 : 6025 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                           | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                           | <b>Environmental Conditions</b>          | 21 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 48.6 PK                 | 74.0           | -25.4       | 1.62 H             | 107                  | 36.4             | 12.2                     |
| 2                                                    | 12050.00        | 36.1 AV                 | 54.0           | -17.9       | 1.62 H             | 107                  | 23.9             | 12.2                     |
| 3                                                    | 18075.00        | 49.6 PK                 | 74.0           | -24.4       | 1.36 H             | 221                  | 55.4             | -5.8                     |
| 4                                                    | 18075.00        | 38.6 AV                 | 54.0           | -15.4       | 1.36 H             | 221                  | 44.4             | -5.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 46.5 PK                 | 74.0           | -27.5       | 1.42 V             | 175                  | 34.3             | 12.2                     |
| 2                                                    | 12050.00        | 35.6 AV                 | 54.0           | -18.4       | 1.42 V             | 175                  | 23.4             | 12.2                     |
| 3                                                    | 18075.00        | 47.7 PK                 | 74.0           | -26.3       | 1.16 V             | 150                  | 53.5             | -5.8                     |
| 4                                                    | 18075.00        | 36.6 AV                 | 54.0           | -17.4       | 1.16 V             | 150                  | 42.4             | -5.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                          |                                          |                                                                      |
|-----------------------------|------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160)<br>Punctured by 20 MHz | <b>Channel</b>                           | CH 143 : 6665 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                           | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                           | <b>Environmental Conditions</b>          | 21 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 48.1 PK                 | 74.0           | -25.9       | 1.55 H             | 104                  | 34.4             | 13.7                     |
| 2                                                    | 13330.00        | 36.1 AV                 | 54.0           | -17.9       | 1.55 H             | 104                  | 22.4             | 13.7                     |
| 3                                                    | 19995.00        | 49.3 PK                 | 74.0           | -24.7       | 1.30 H             | 235                  | 54.4             | -5.1                     |
| 4                                                    | 19995.00        | 38.6 AV                 | 54.0           | -15.4       | 1.30 H             | 235                  | 43.7             | -5.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 46.5 PK                 | 74.0           | -27.5       | 1.44 V             | 197                  | 32.8             | 13.7                     |
| 2                                                    | 13330.00        | 35.2 AV                 | 54.0           | -18.8       | 1.44 V             | 197                  | 21.5             | 13.7                     |
| 3                                                    | 19995.00        | 48.0 PK                 | 74.0           | -26.0       | 1.17 V             | 162                  | 53.1             | -5.1                     |
| 4                                                    | 19995.00        | 37.1 AV                 | 54.0           | -16.9       | 1.17 V             | 162                  | 42.2             | -5.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                          |                                          |                                                                      |
|-----------------------------|------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160)<br>Punctured by 40 MHz | <b>Channel</b>                           | CH 15 : 6025 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                           | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                           | <b>Environmental Conditions</b>          | 21 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 48.5 PK                 | 74.0           | -25.5       | 1.64 H             | 131                  | 36.3             | 12.2                     |
| 2                                                    | 12050.00        | 36.1 AV                 | 54.0           | -17.9       | 1.64 H             | 131                  | 23.9             | 12.2                     |
| 3                                                    | 18075.00        | 49.3 PK                 | 74.0           | -24.7       | 1.32 H             | 219                  | 55.1             | -5.8                     |
| 4                                                    | 18075.00        | 38.3 AV                 | 54.0           | -15.7       | 1.32 H             | 219                  | 44.1             | -5.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12050.00        | 46.1 PK                 | 74.0           | -27.9       | 1.41 V             | 193                  | 33.9             | 12.2                     |
| 2                                                    | 12050.00        | 35.0 AV                 | 54.0           | -19.0       | 1.41 V             | 193                  | 22.8             | 12.2                     |
| 3                                                    | 18075.00        | 47.5 PK                 | 74.0           | -26.5       | 1.18 V             | 152                  | 53.3             | -5.8                     |
| 4                                                    | 18075.00        | 36.9 AV                 | 54.0           | -17.1       | 1.18 V             | 152                  | 42.7             | -5.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                          |                                          |                                                                      |
|-----------------------------|------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT160)<br>Punctured by 40 MHz | <b>Channel</b>                           | CH 143 : 6665 MHz                                                    |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                           | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                           | <b>Environmental Conditions</b>          | 21 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 48.5 PK                 | 74.0           | -25.5       | 1.60 H             | 129                  | 34.8             | 13.7                     |
| 2                                                    | 13330.00        | 36.4 AV                 | 54.0           | -17.6       | 1.60 H             | 129                  | 22.7             | 13.7                     |
| 3                                                    | 19995.00        | 49.9 PK                 | 74.0           | -24.1       | 1.30 H             | 250                  | 55.0             | -5.1                     |
| 4                                                    | 19995.00        | 38.9 AV                 | 54.0           | -15.1       | 1.30 H             | 250                  | 44.0             | -5.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 13330.00        | 46.2 PK                 | 74.0           | -27.8       | 1.39 V             | 181                  | 32.5             | 13.7                     |
| 2                                                    | 13330.00        | 35.4 AV                 | 54.0           | -18.6       | 1.39 V             | 181                  | 21.7             | 13.7                     |
| 3                                                    | 19995.00        | 47.9 PK                 | 74.0           | -26.1       | 1.09 V             | 148                  | 53.0             | -5.1                     |
| 4                                                    | 19995.00        | 36.8 AV                 | 54.0           | -17.2       | 1.09 V             | 148                  | 41.9             | -5.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                          |                                          |                                                                      |
|-----------------------------|------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT320)<br>Punctured by 40 MHz | <b>Channel</b>                           | CH 63 : 6265 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                           | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                           | <b>Environmental Conditions</b>          | 21 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12530.00        | 48.8 PK                 | 74.0           | -25.2       | 1.56 H             | 133                  | 37.0             | 11.8                     |
| 2                                                    | 12530.00        | 36.4 AV                 | 54.0           | -17.6       | 1.56 H             | 133                  | 24.6             | 11.8                     |
| 3                                                    | 18795.00        | 49.3 PK                 | 74.0           | -24.7       | 1.27 H             | 244                  | 55.0             | -5.7                     |
| 4                                                    | 18795.00        | 38.6 AV                 | 54.0           | -15.4       | 1.27 H             | 244                  | 44.3             | -5.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12530.00        | 46.6 PK                 | 74.0           | -27.4       | 1.39 V             | 173                  | 34.8             | 11.8                     |
| 2                                                    | 12530.00        | 35.2 AV                 | 54.0           | -18.8       | 1.39 V             | 173                  | 23.4             | 11.8                     |
| 3                                                    | 18795.00        | 47.8 PK                 | 74.0           | -26.2       | 1.09 V             | 163                  | 53.5             | -5.7                     |
| 4                                                    | 18795.00        | 36.9 AV                 | 54.0           | -17.1       | 1.09 V             | 163                  | 42.6             | -5.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.



|                             |                                          |                                          |                                                                      |
|-----------------------------|------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT320)<br>Punctured by 80 MHz | <b>Channel</b>                           | CH 63 : 6265 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                           | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                           | <b>Environmental Conditions</b>          | 21 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12530.00        | 48.8 PK                 | 74.0           | -25.2       | 1.58 H             | 105                  | 37.0             | 11.8                     |
| 2                                                    | 12530.00        | 36.6 AV                 | 54.0           | -17.4       | 1.58 H             | 105                  | 24.8             | 11.8                     |
| 3                                                    | 18795.00        | 49.8 PK                 | 74.0           | -24.2       | 1.34 H             | 232                  | 55.5             | -5.7                     |
| 4                                                    | 18795.00        | 39.0 AV                 | 54.0           | -15.0       | 1.34 H             | 232                  | 44.7             | -5.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12530.00        | 46.6 PK                 | 74.0           | -27.4       | 1.34 V             | 169                  | 34.8             | 11.8                     |
| 2                                                    | 12530.00        | 35.8 AV                 | 54.0           | -18.2       | 1.34 V             | 169                  | 24.0             | 11.8                     |
| 3                                                    | 18795.00        | 47.9 PK                 | 74.0           | -26.1       | 1.18 V             | 166                  | 53.6             | -5.7                     |
| 4                                                    | 18795.00        | 37.2 AV                 | 54.0           | -16.8       | 1.18 V             | 166                  | 42.9             | -5.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

|                             |                                             |                                          |                                                                      |
|-----------------------------|---------------------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT320)<br>Punctured by 80+40 MHz | <b>Channel</b>                           | CH 63 : 6265 MHz                                                     |
| <b>Frequency Range</b>      | 1 GHz ~ 40 GHz                              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz                              | <b>Environmental Conditions</b>          | 21 °C, 63 % RH                                                       |
| <b>Tested By</b>            | Willy Lin                                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12530.00        | 48.3 PK                 | 74.0           | -25.7       | 1.59 H             | 129                  | 36.5             | 11.8                     |
| 2                                                    | 12530.00        | 36.1 AV                 | 54.0           | -17.9       | 1.59 H             | 129                  | 24.3             | 11.8                     |
| 3                                                    | 18795.00        | 49.3 PK                 | 74.0           | -24.7       | 1.26 H             | 248                  | 55.0             | -5.7                     |
| 4                                                    | 18795.00        | 38.3 AV                 | 54.0           | -15.7       | 1.26 H             | 248                  | 44.0             | -5.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 12530.00        | 46.6 PK                 | 74.0           | -27.4       | 1.40 V             | 181                  | 34.8             | 11.8                     |
| 2                                                    | 12530.00        | 35.8 AV                 | 54.0           | -18.2       | 1.40 V             | 181                  | 24.0             | 11.8                     |
| 3                                                    | 18795.00        | 47.9 PK                 | 74.0           | -26.1       | 1.17 V             | 156                  | 53.6             | -5.7                     |
| 4                                                    | 18795.00        | 37.2 AV                 | 54.0           | -16.8       | 1.17 V             | 156                  | 42.9             | -5.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

## 8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

## 9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---