


Chain 1

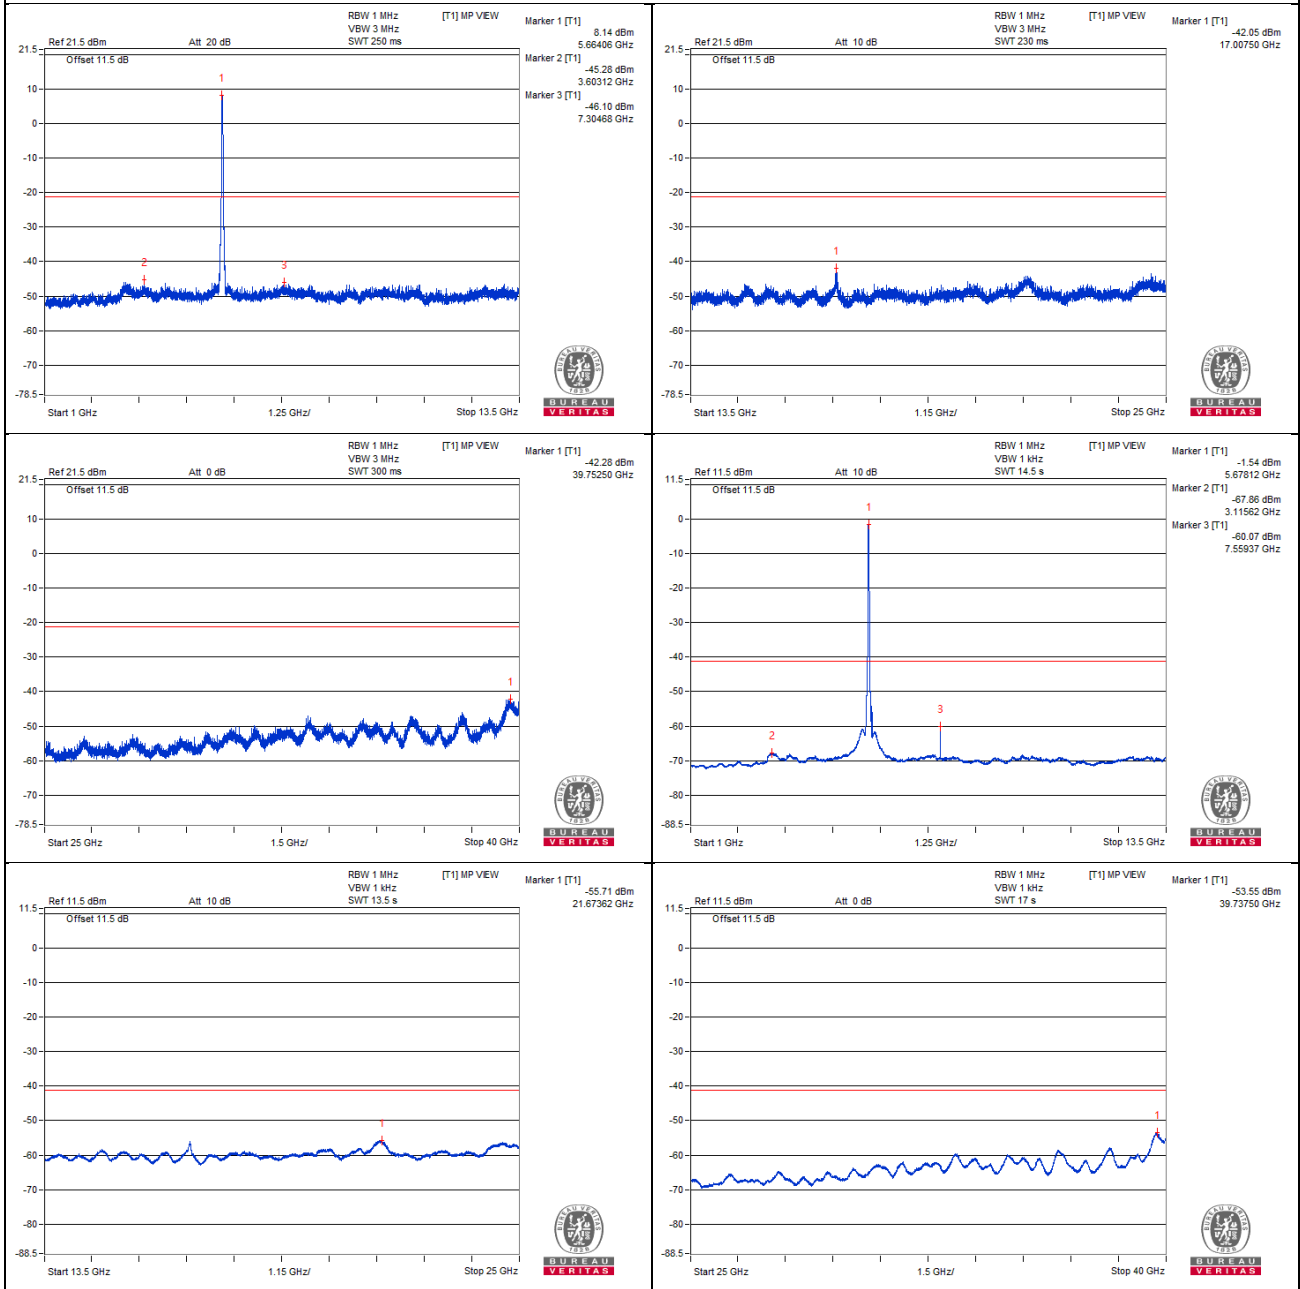

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5726.92 PK	71.29	68.2	* 3.09	-35.04	-34.48	7.77	-23.97


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

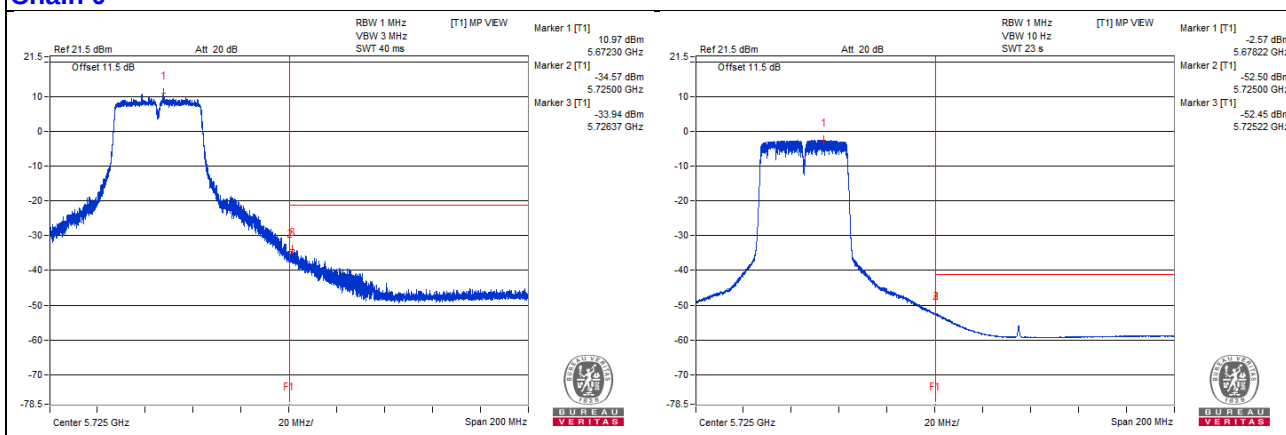

Chain 1

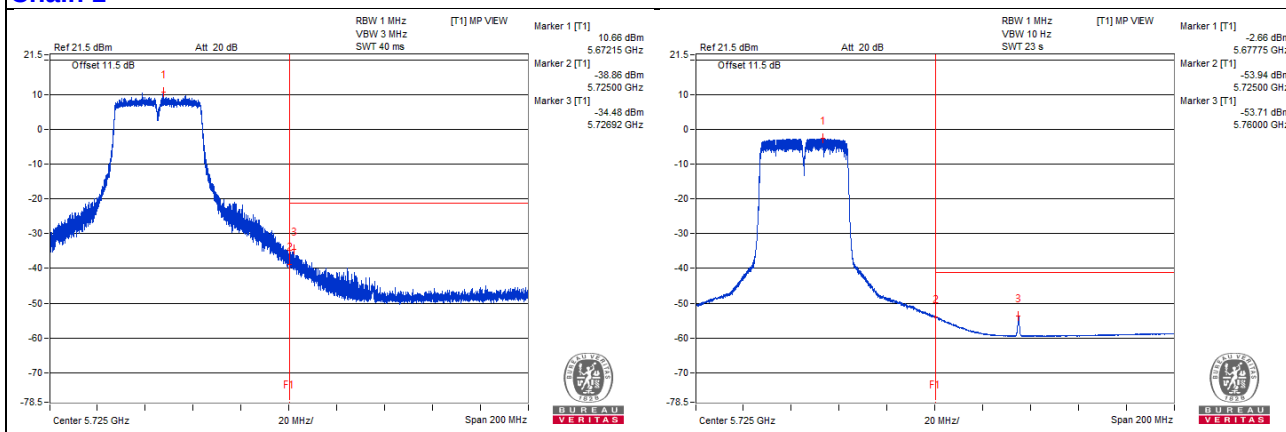

802.11ac (VHT40) - Channel 142

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3800 PK	57.5	74	-16.5	-48.49	-48.59	7.77	-37.76
2	3790.62 AV	36.62	54	-17.38	-69.32	-69.53	7.77	-58.64
3	7614.06 PK	58.05	74	-15.95	-46.89	-49.47	7.77	-37.21
4	7614.06 AV	43.42	54	-10.58	-62.39	-62.86	7.77	-51.84
5	11425 PK	56.23	74	-17.77	-51.7	-48.5	7.77	-39.03
6	11421.87 AV	36.83	54	-17.17	-69.32	-69.1	7.77	-58.43
7	17132.56 PK	62.96	68.2	-5.24	-43.54	-42.67	7.77	-32.3

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

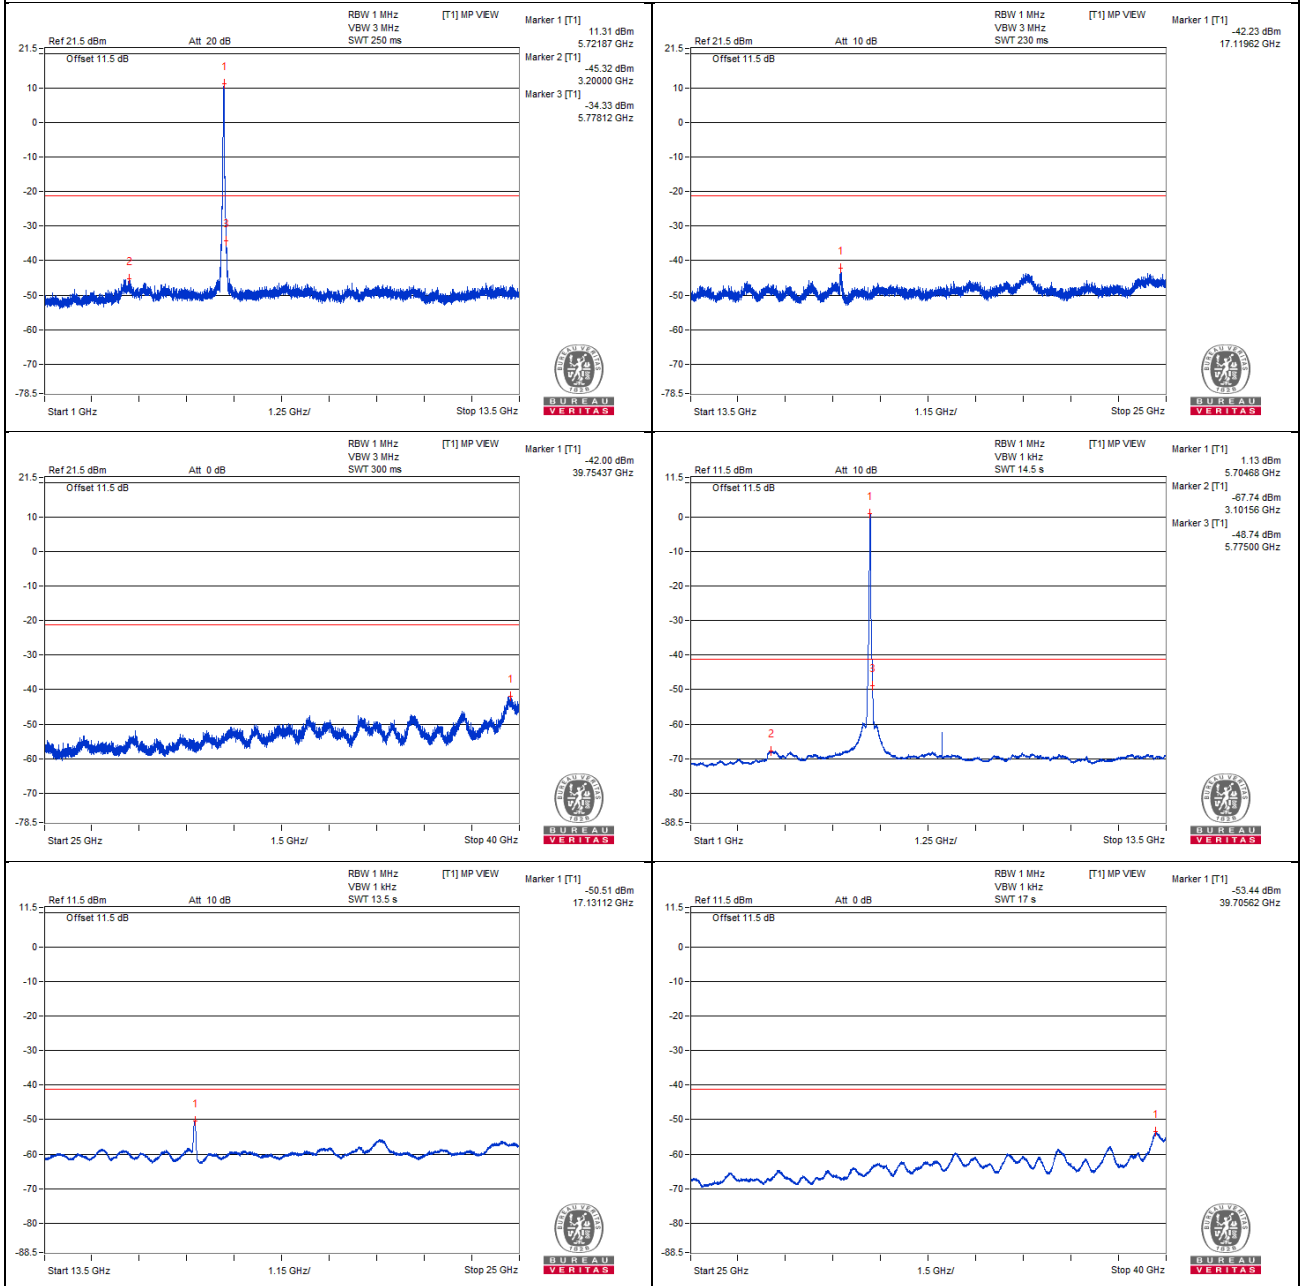

Chain 1

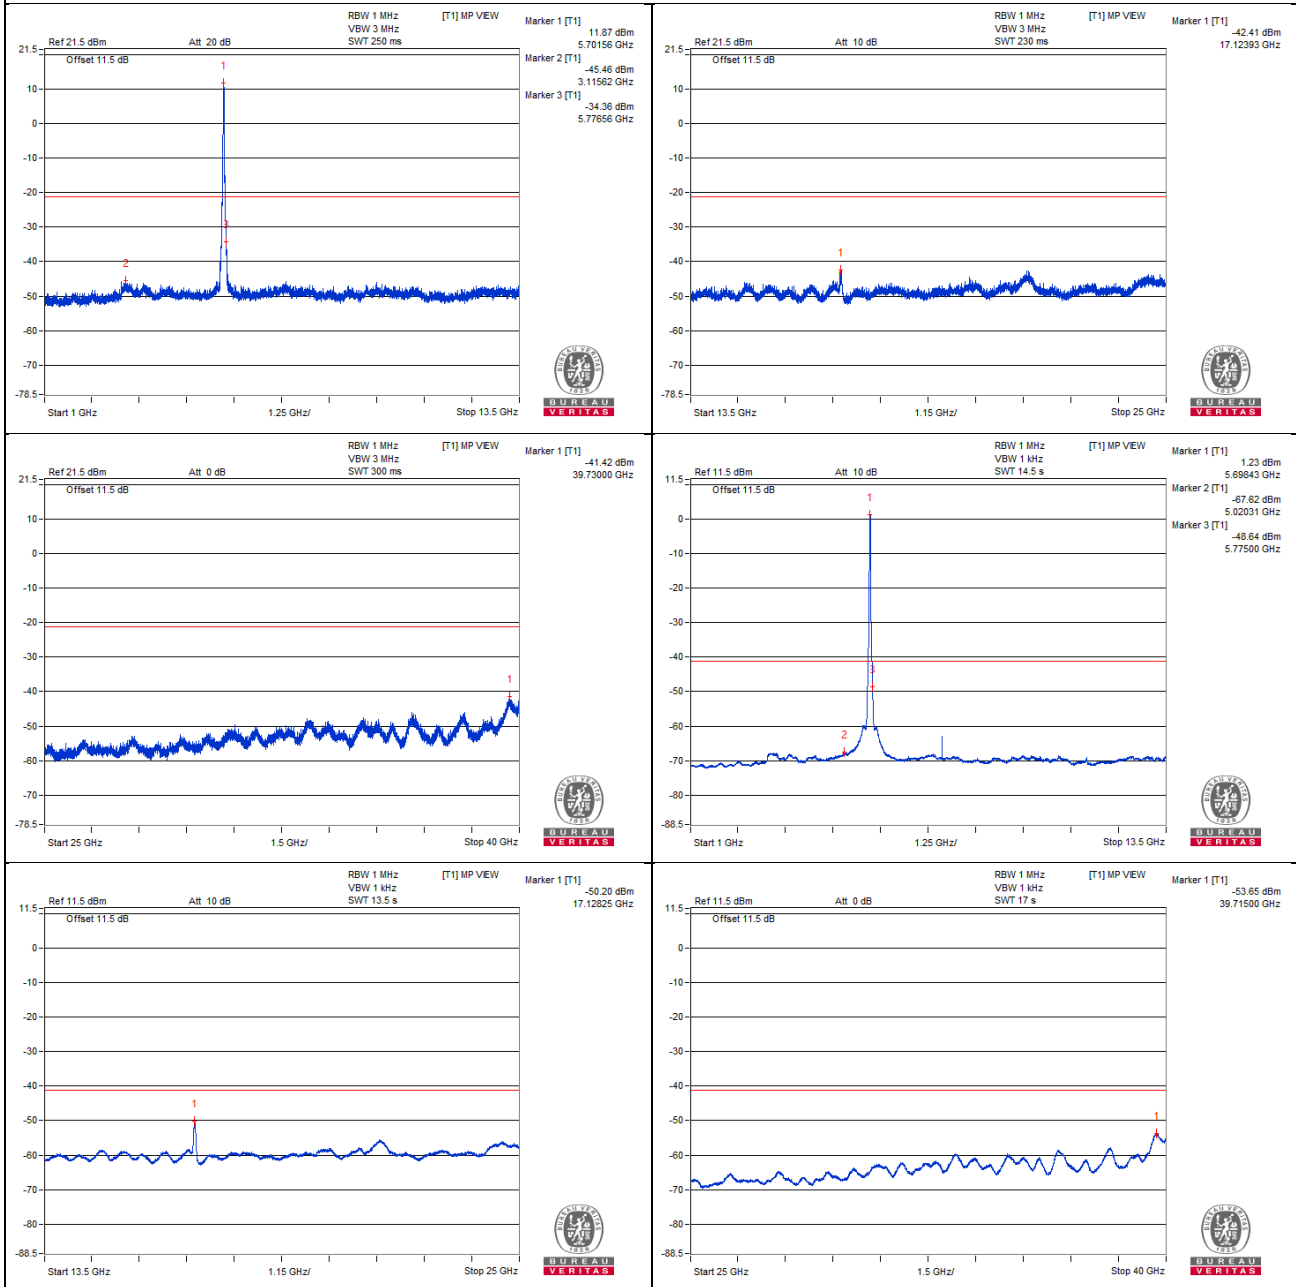

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5856.25 PK	60.27	68.2	-7.93	-46.11	-45.45	7.77	-34.99

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

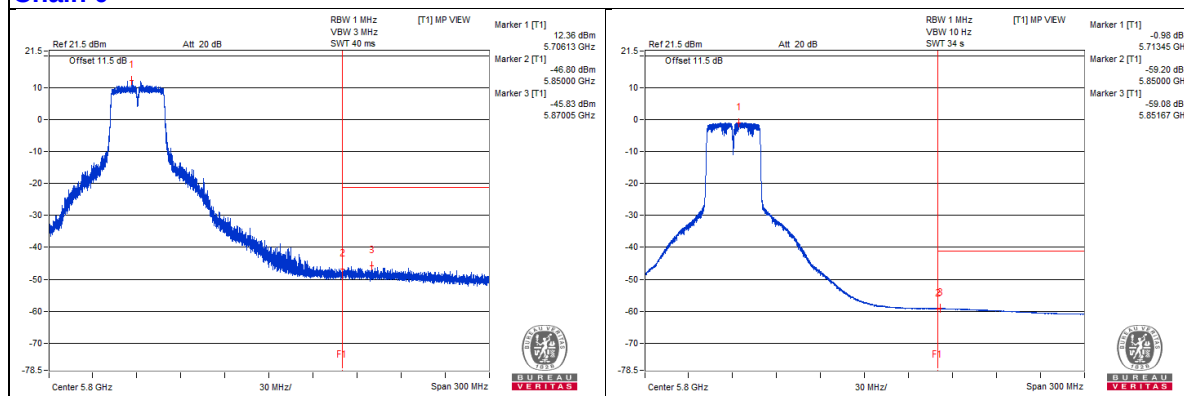

Chain 1

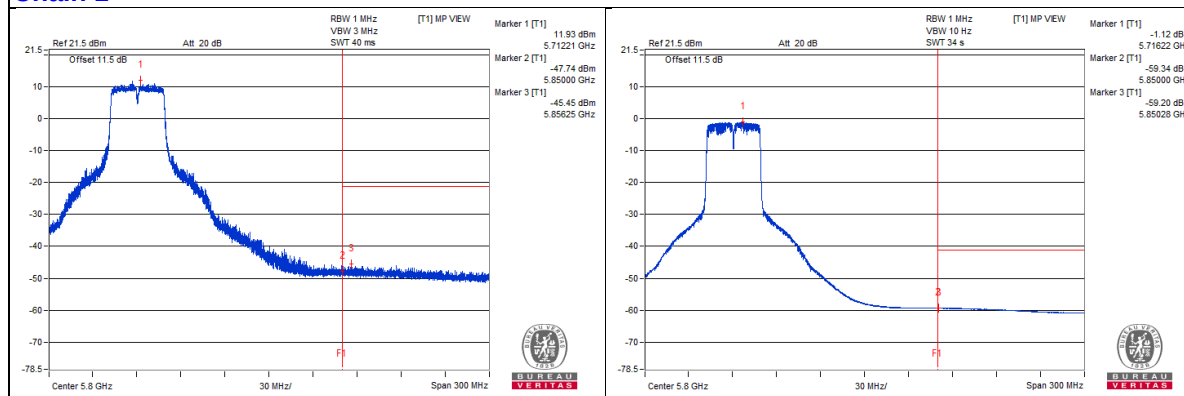

802.11ac (VHT40) – Channel 151

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3854.68 PK	55.8	74	-18.2	-50.01	-50.48	7.77	-39.46
2	3845.31 AV	44.16	54	-9.84	-61.91	-61.85	7.77	-51.1
3	7687.5 PK	56.96	74	-17.04	-49.1	-49.06	7.77	-38.3
4	7673.43 AV	45.25	54	-8.75	-60.67	-60.91	7.77	-50.01
5	11520.31 PK	55.08	74	-18.92	-51.56	-50.43	7.77	-40.18
6	11520.31 AV	43.56	54	-10.44	-62.33	-62.64	7.77	-51.7
7	17263.37 PK	64.17	68.2	-4.03	-40.74	-43.41	7.77	-31.09

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0




Chain 1

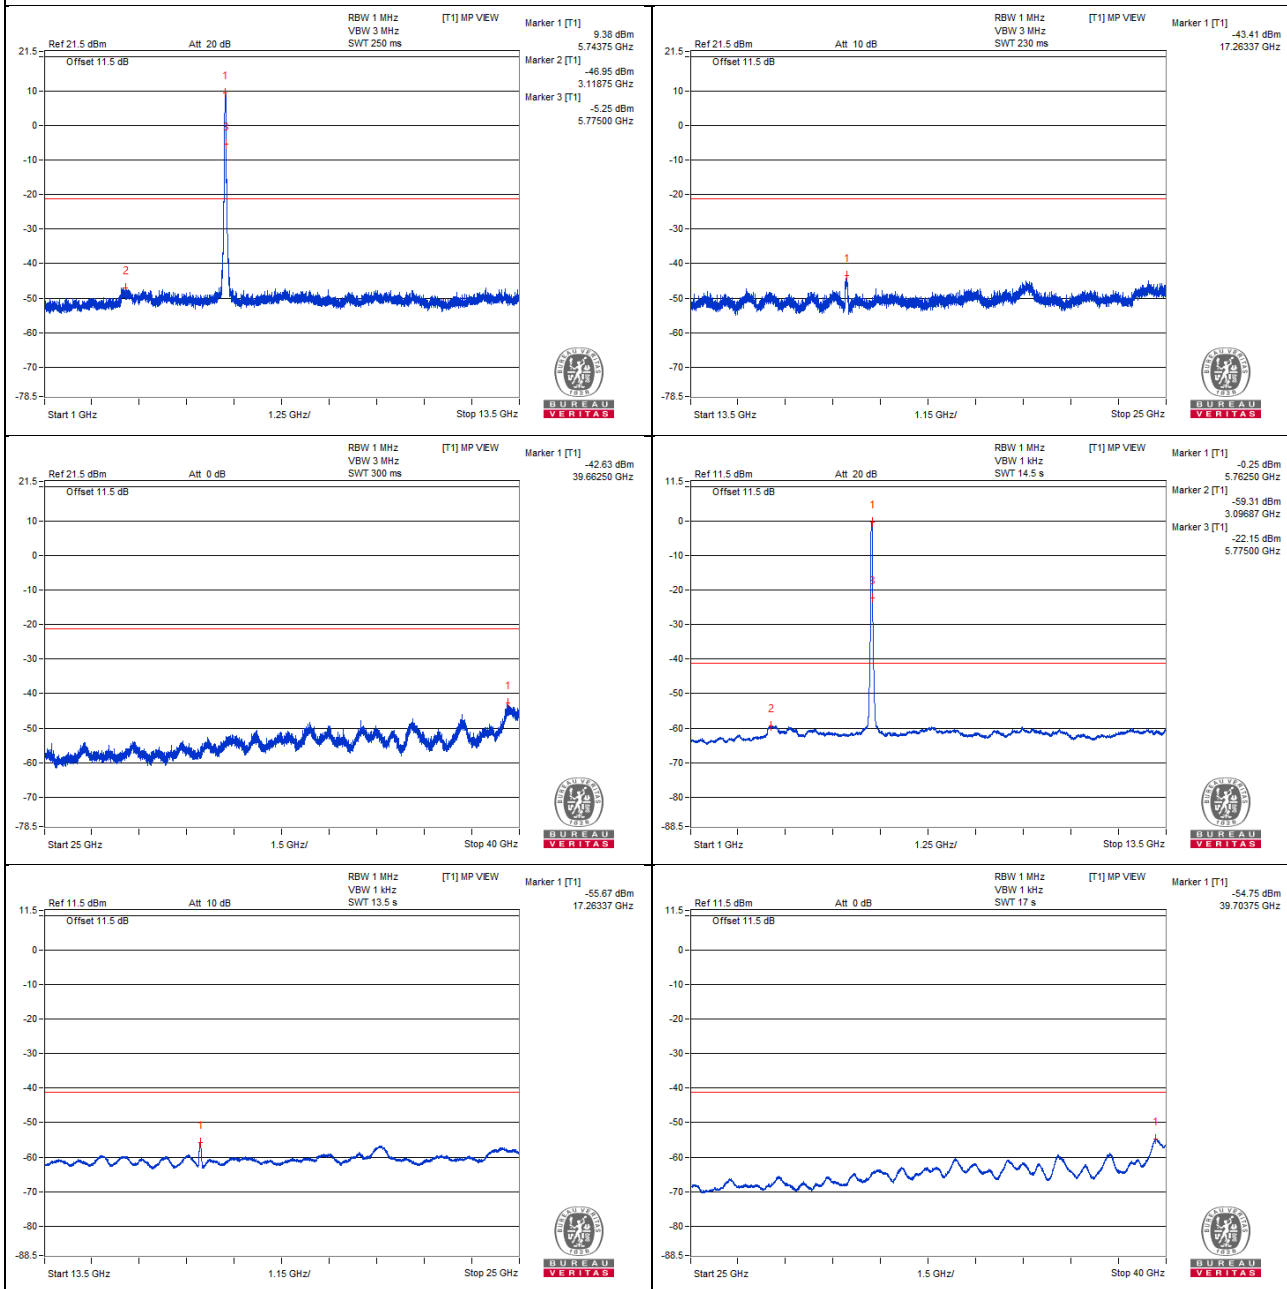


Bandedge table

Chain 0

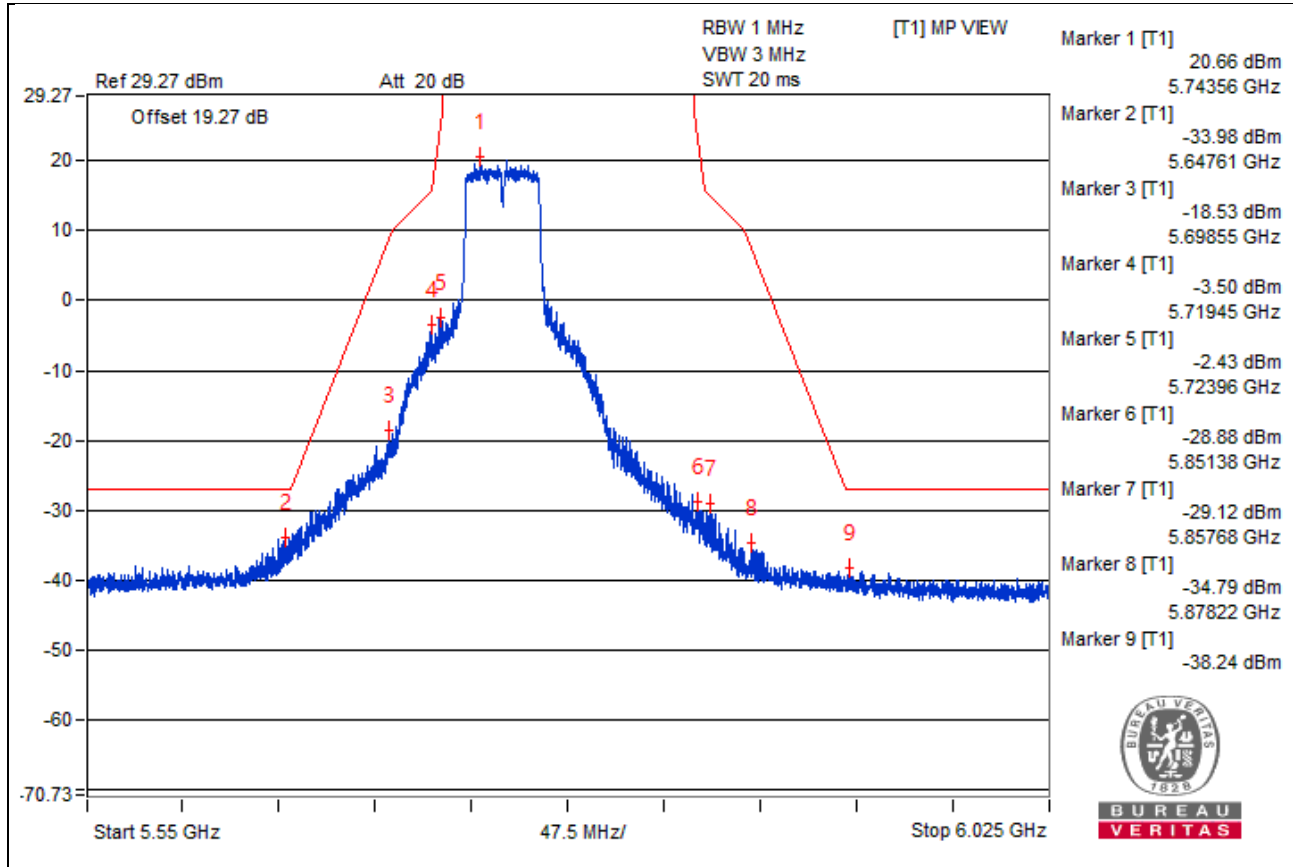

Chain 1

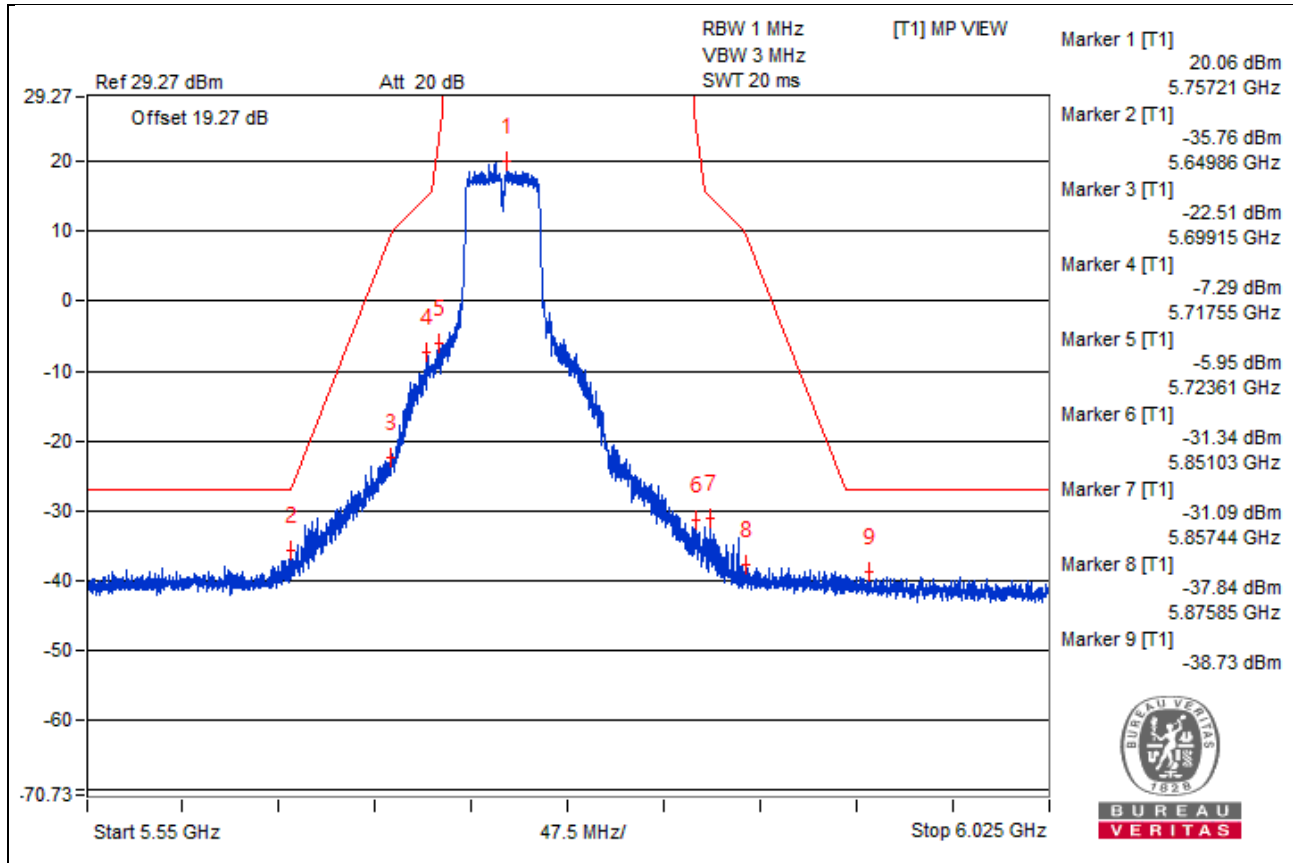

802.11ac (VHT40) – Channel 159

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3848.43 PK	55.68	74	-18.32	-51.19	-49.67	7.77	-39.58
2	3878.12 AV	44.16	54	-9.84	-62.21	-61.57	7.77	-51.1
3	7734.37 PK	57.07	74	-16.93	-47.98	-50.25	7.77	-38.19
4	7725 AV	45.34	54	-8.66	-60.62	-60.79	7.77	-49.92
5	11595.31 PK	55.55	74	-18.45	-49.15	-52.44	7.77	-39.71
6	11598.43 AV	43.29	54	-10.71	-62.62	-62.89	7.77	-51.97
7	17387 PK	63.5	68.2	-4.7	-40.31	-47.37	7.77	-31.76

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0




Chain 1

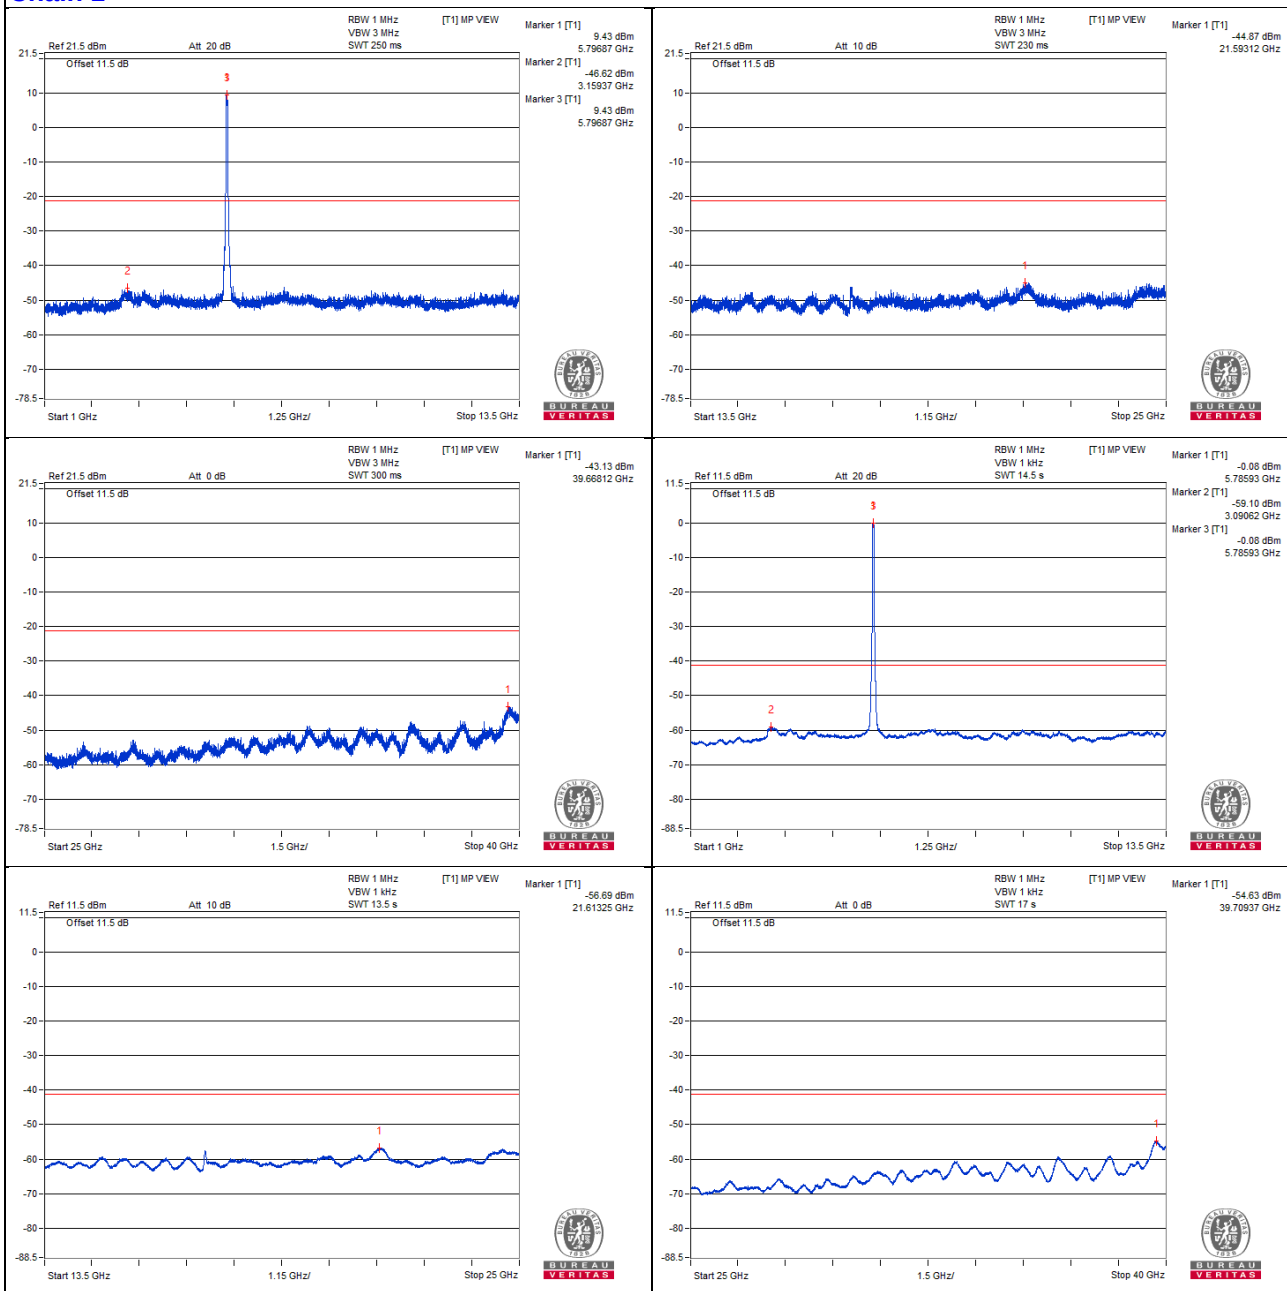


Bandedge table

Chain 0

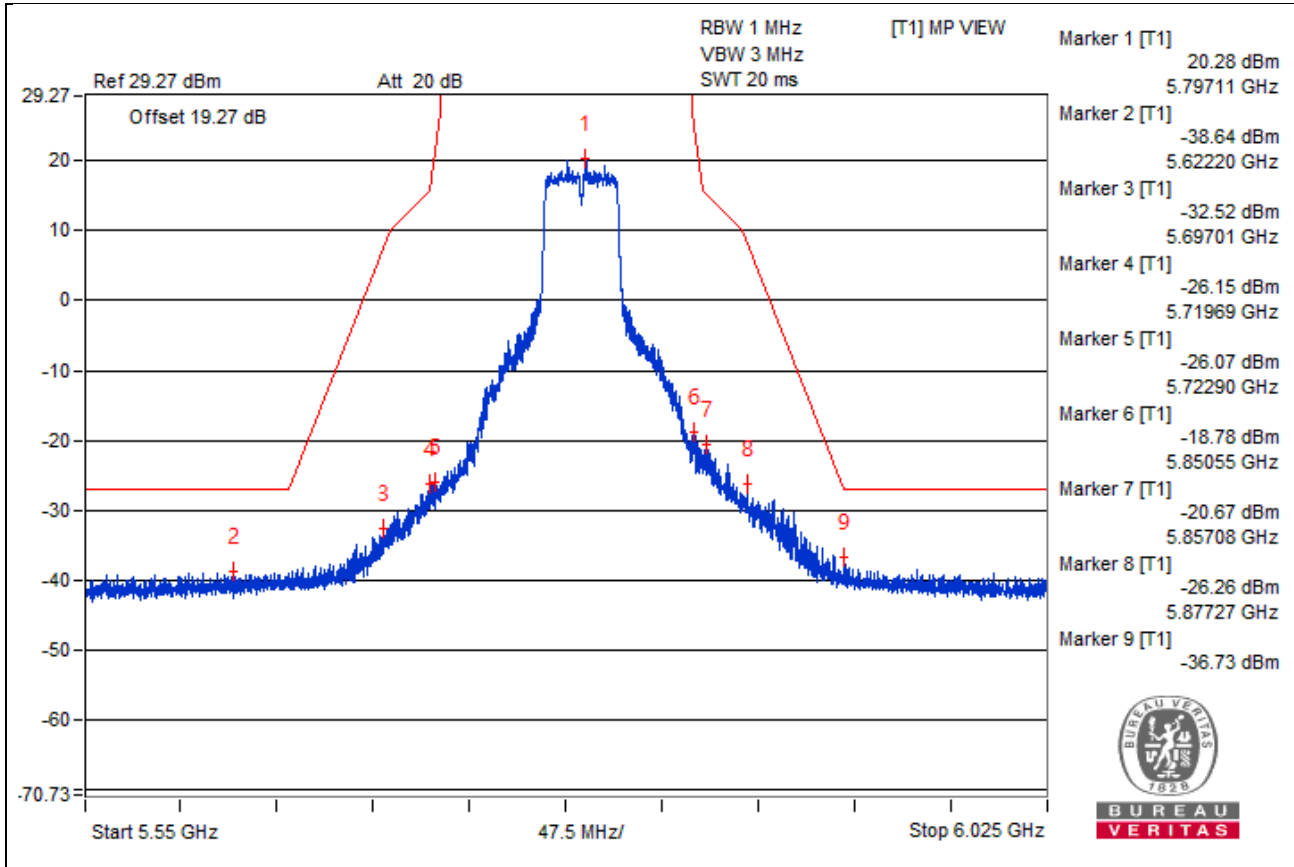

Chain 1

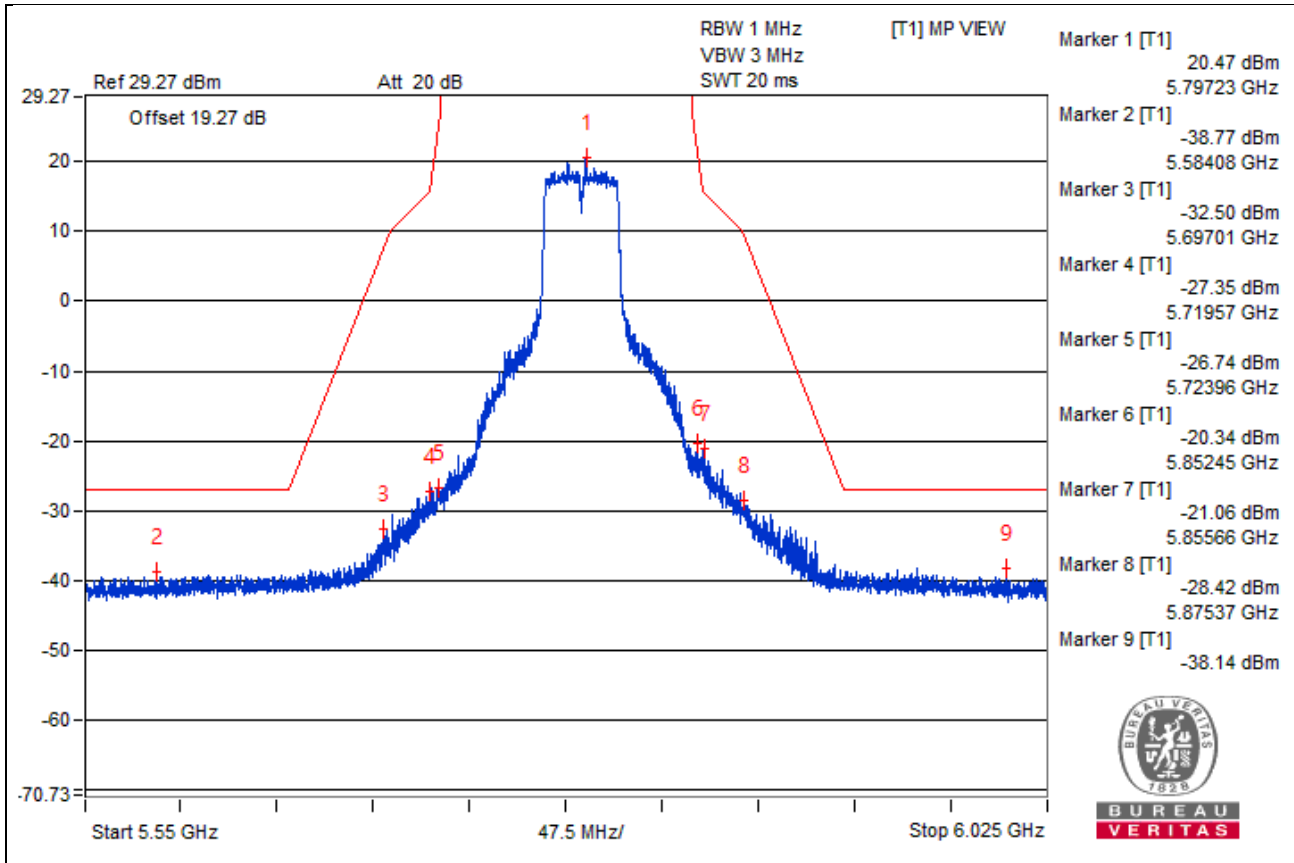

802.11ac (VHT80) - Channel 42

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3457.81 PK	57.02	68.2	-11.18	-48.84	-46.23	6.09	-38.24
2	6946.87 PK	58.52	68.2	-9.68	-48.23	-44.31	6.09	-36.74
3	10420.31 PK	55.71	68.2	-12.49	-48.73	-48.58	6.09	-39.55
4	15649.06 PK	54.86	74	-19.14	-50.49	-48.69	6.09	-40.4
5	15613.12 AV	43.36	54	-10.64	-61.07	-60.93	6.09	-51.9
6	5759.37 PK	60.73	68.2	-7.47	-43.77	-43.49	6.09	-34.53

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

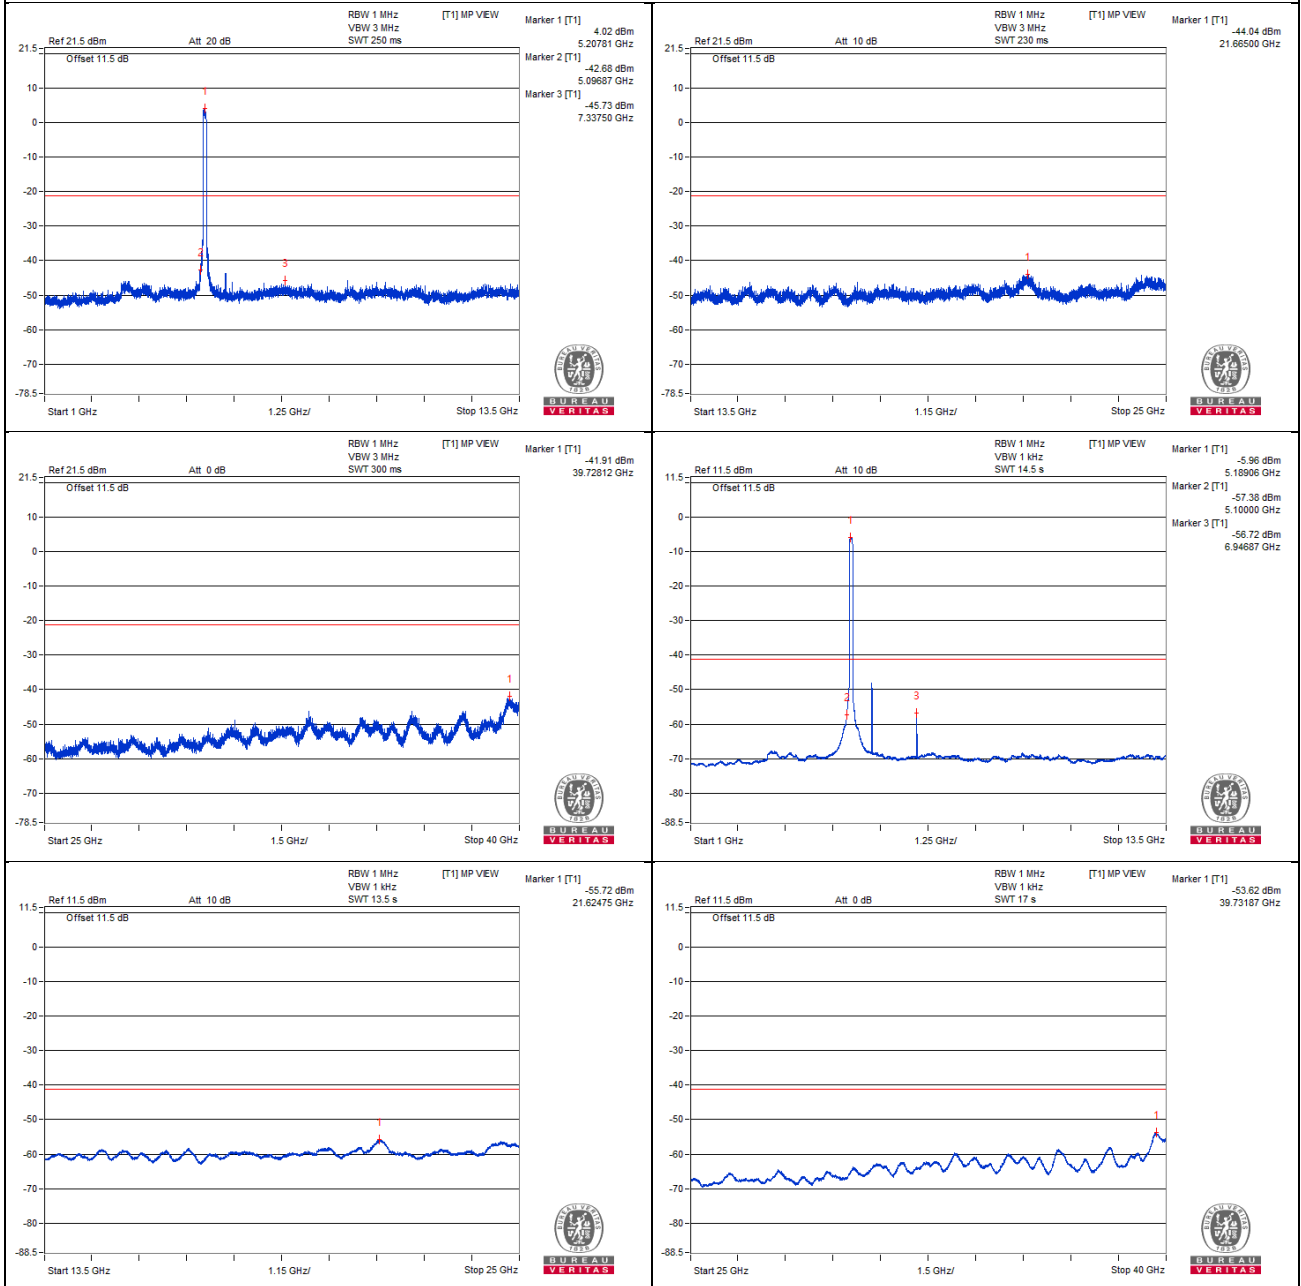

Chain 1

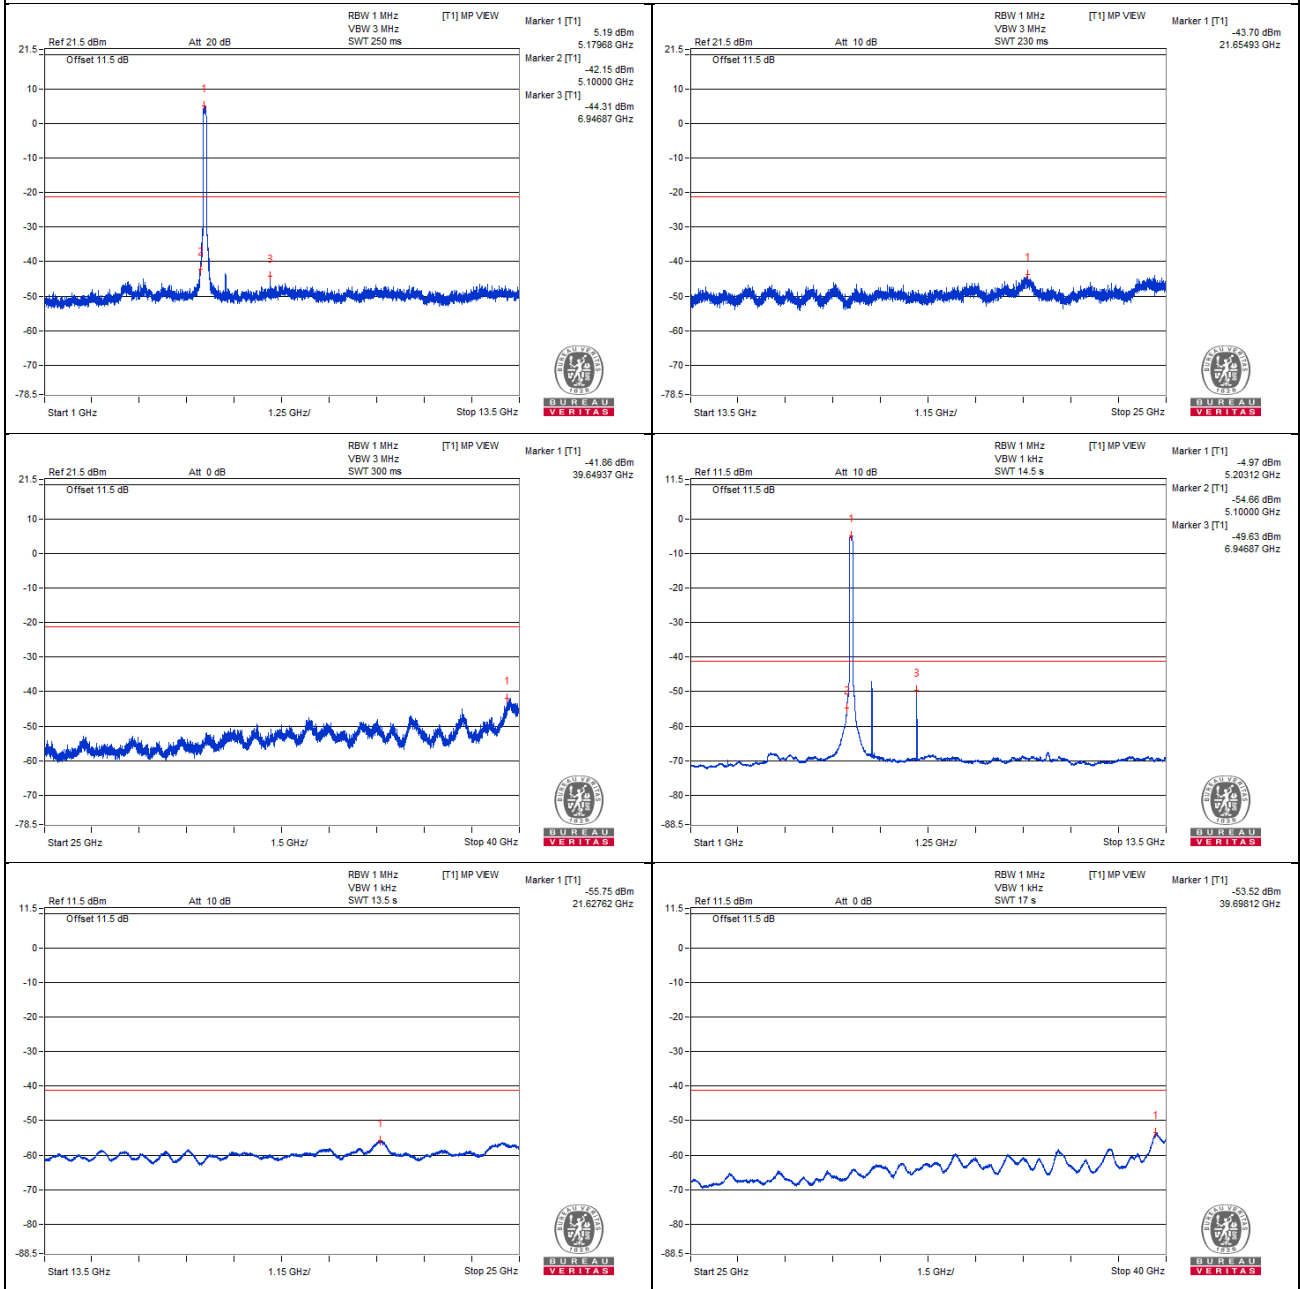

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5149.15 PK	73.05	74	*-0.95	-31.62	-31.03	6.09	-22.21
2	5149.97 AV	53.45	54	*-0.55	-52.26	-49.88	6.09	-41.81

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

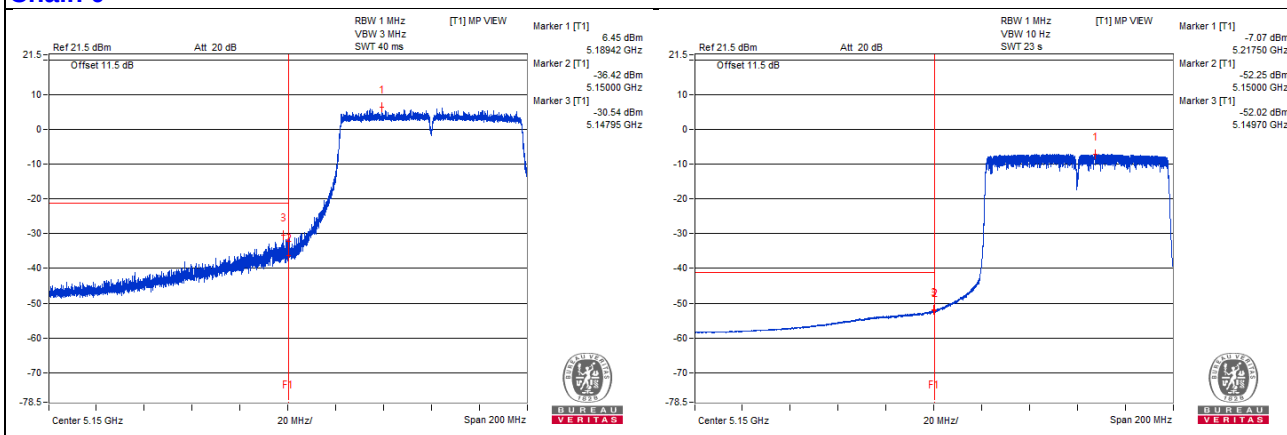

Chain 1

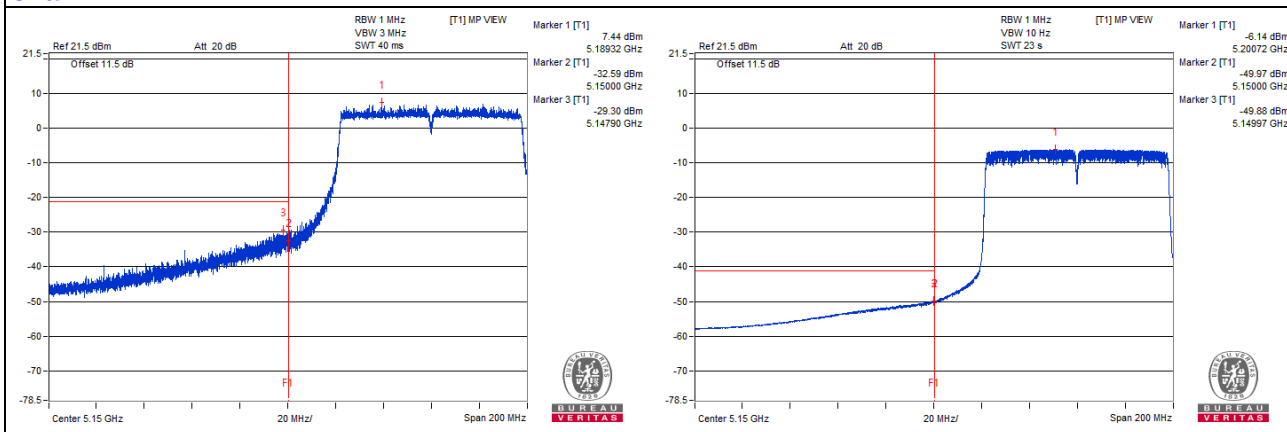

802.11ac (VHT80) - Channel 58

Conducted spurious emission table







No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3534.37 PK	56.19	74	-17.81	-48.24	-48.11	6.09	-39.07
2	3532.81 AV	35.68	54	-18.32	-68.69	-68.68	6.09	-59.58
3	7053.12 PK	57.5	68.2	-10.7	-49.14	-45.37	6.09	-37.76
4	10598.43 PK	56.03	68.2	-12.17	-48.74	-47.96	6.09	-39.23
5	15850.31 PK	55.7	74	-18.3	-49.05	-48.31	6.09	-39.56
6	15876.18 AV	44.65	54	-9.35	-59.64	-59.79	6.09	-50.61
7	5759.37 PK	60.71	68.2	-7.49	-43.71	-43.59	6.09	-34.55

Note :







Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

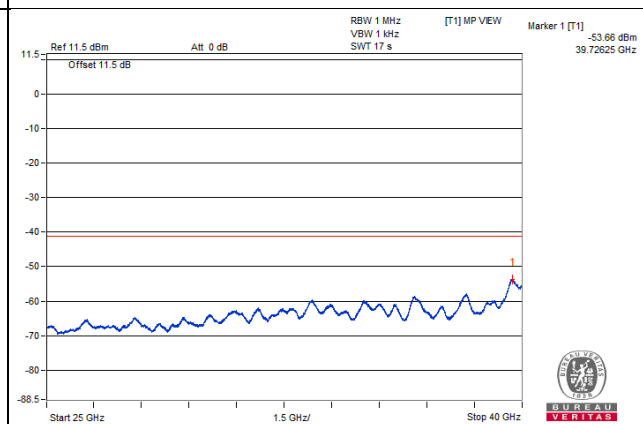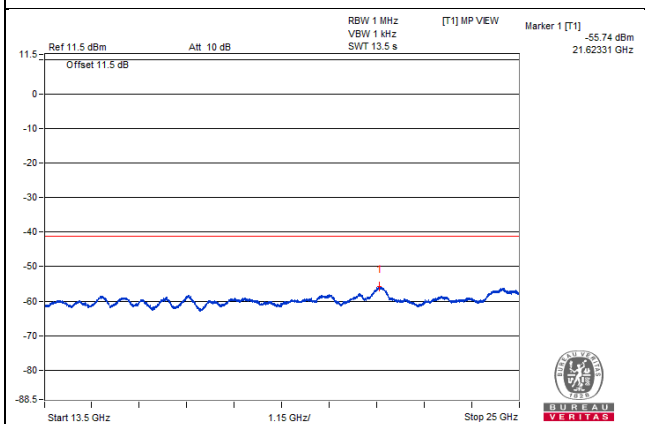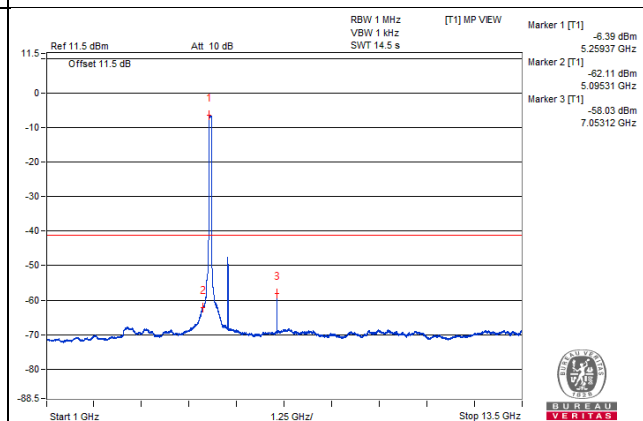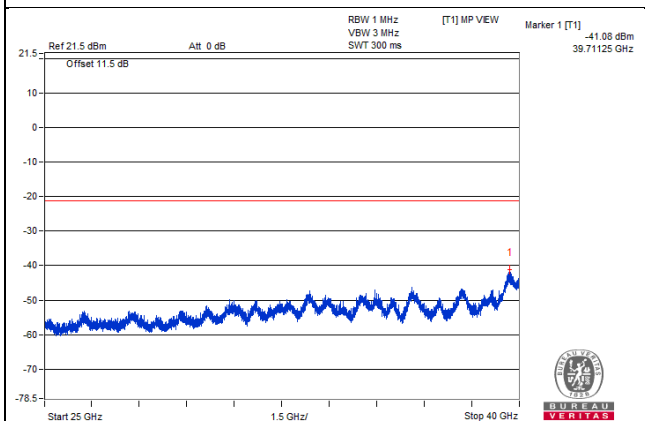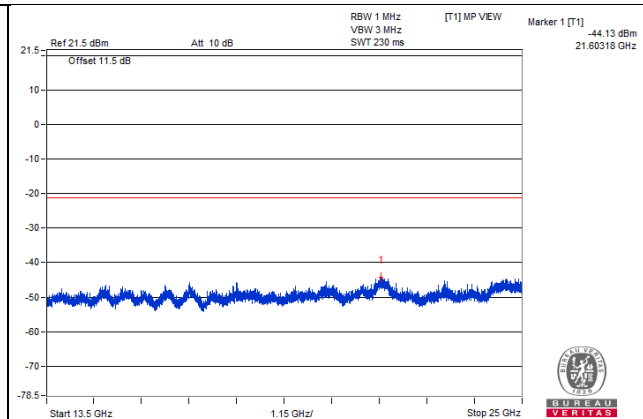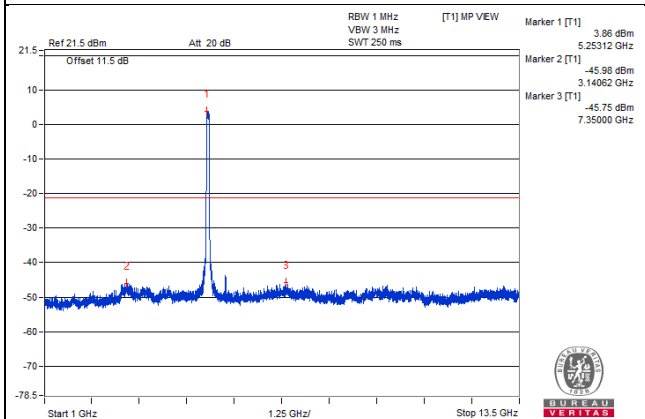

Chain 1

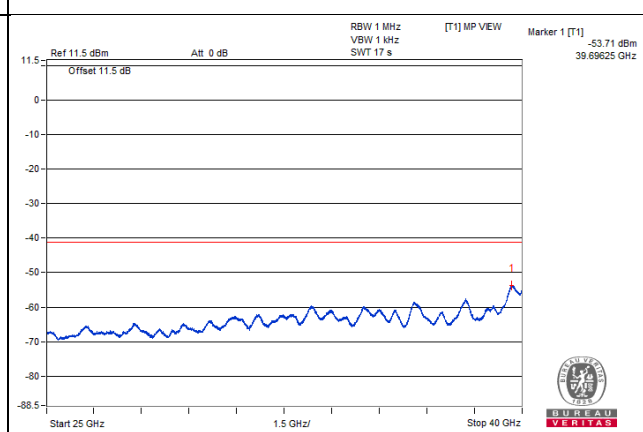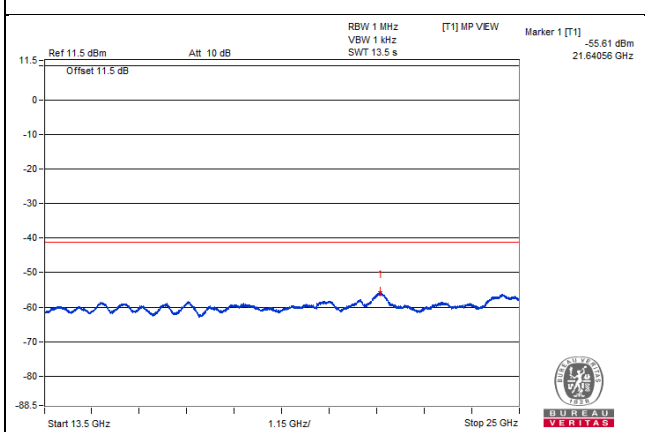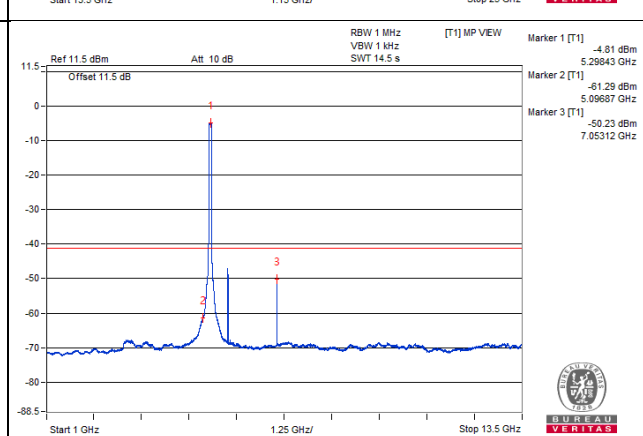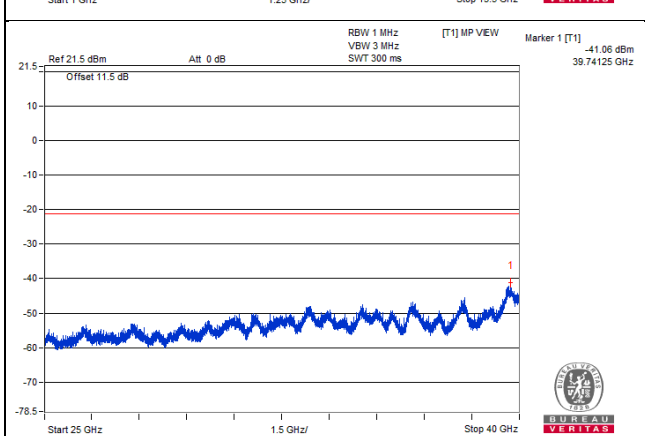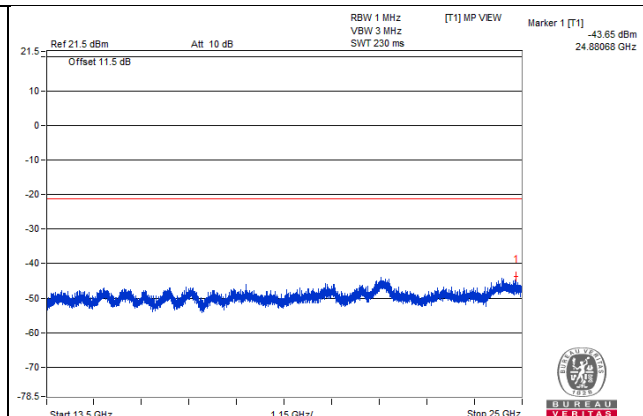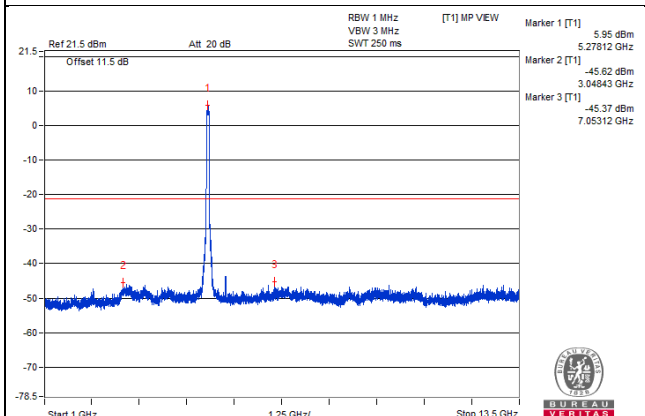

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5351.57 PK	73.77	74	*-0.23	-36.77	-28.14	6.09	-21.49
2	5350.1 AV	53.09	54	*-0.91	-54.52	-49.43	6.09	-42.17

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

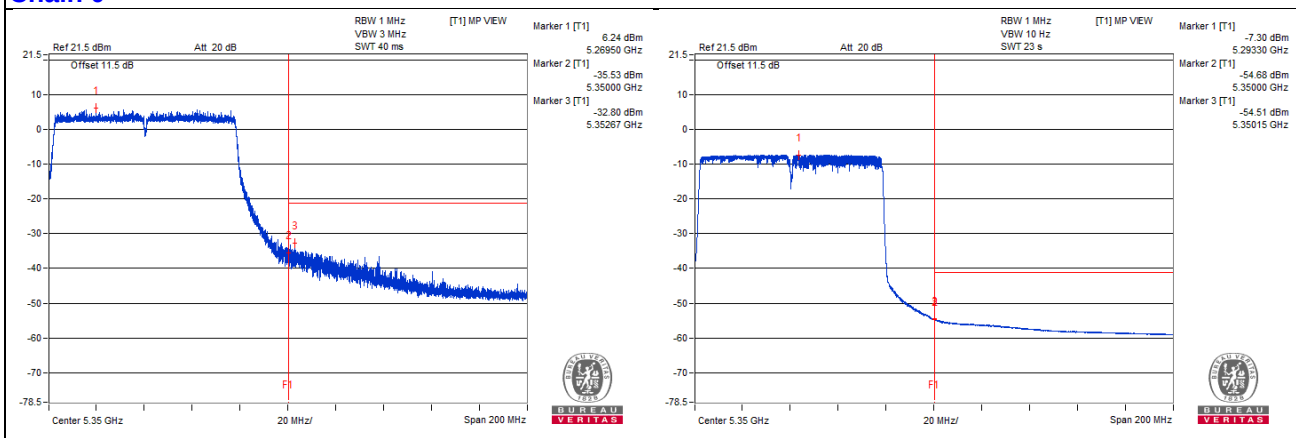

Chain 1

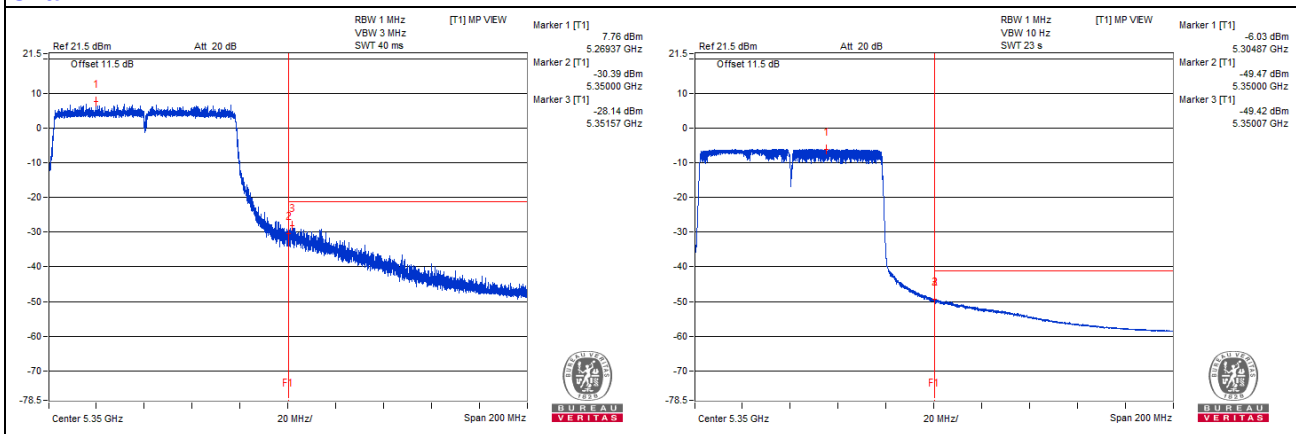

802.11ac (VHT80) - Channel 106

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3684.37 PK	57.85	74	-16.15	-47.89	-48.51	7.77	-37.41
2	3667.18 AV	36.93	54	-17.07	-69.06	-69.17	7.77	-58.33
3	7373.43 PK	59.45	74	-14.55	-47.21	-46.04	7.77	-35.81
4	7373.43 AV	50.57	54	-3.43	-56.61	-54.57	7.77	-44.69
5	11051.56 PK	56.58	74	-17.42	-50.11	-48.89	7.77	-38.68
6	11050 AV	35.15	54	-18.85	-70.75	-71.03	7.77	-60.11
7	16602.12 PK	56.81	68.2	-11.39	-47.46	-52.27	7.77	-38.45
8	5759.37 PK	59.95	68.2	-8.25	-45.61	-46.63	7.77	-35.31

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

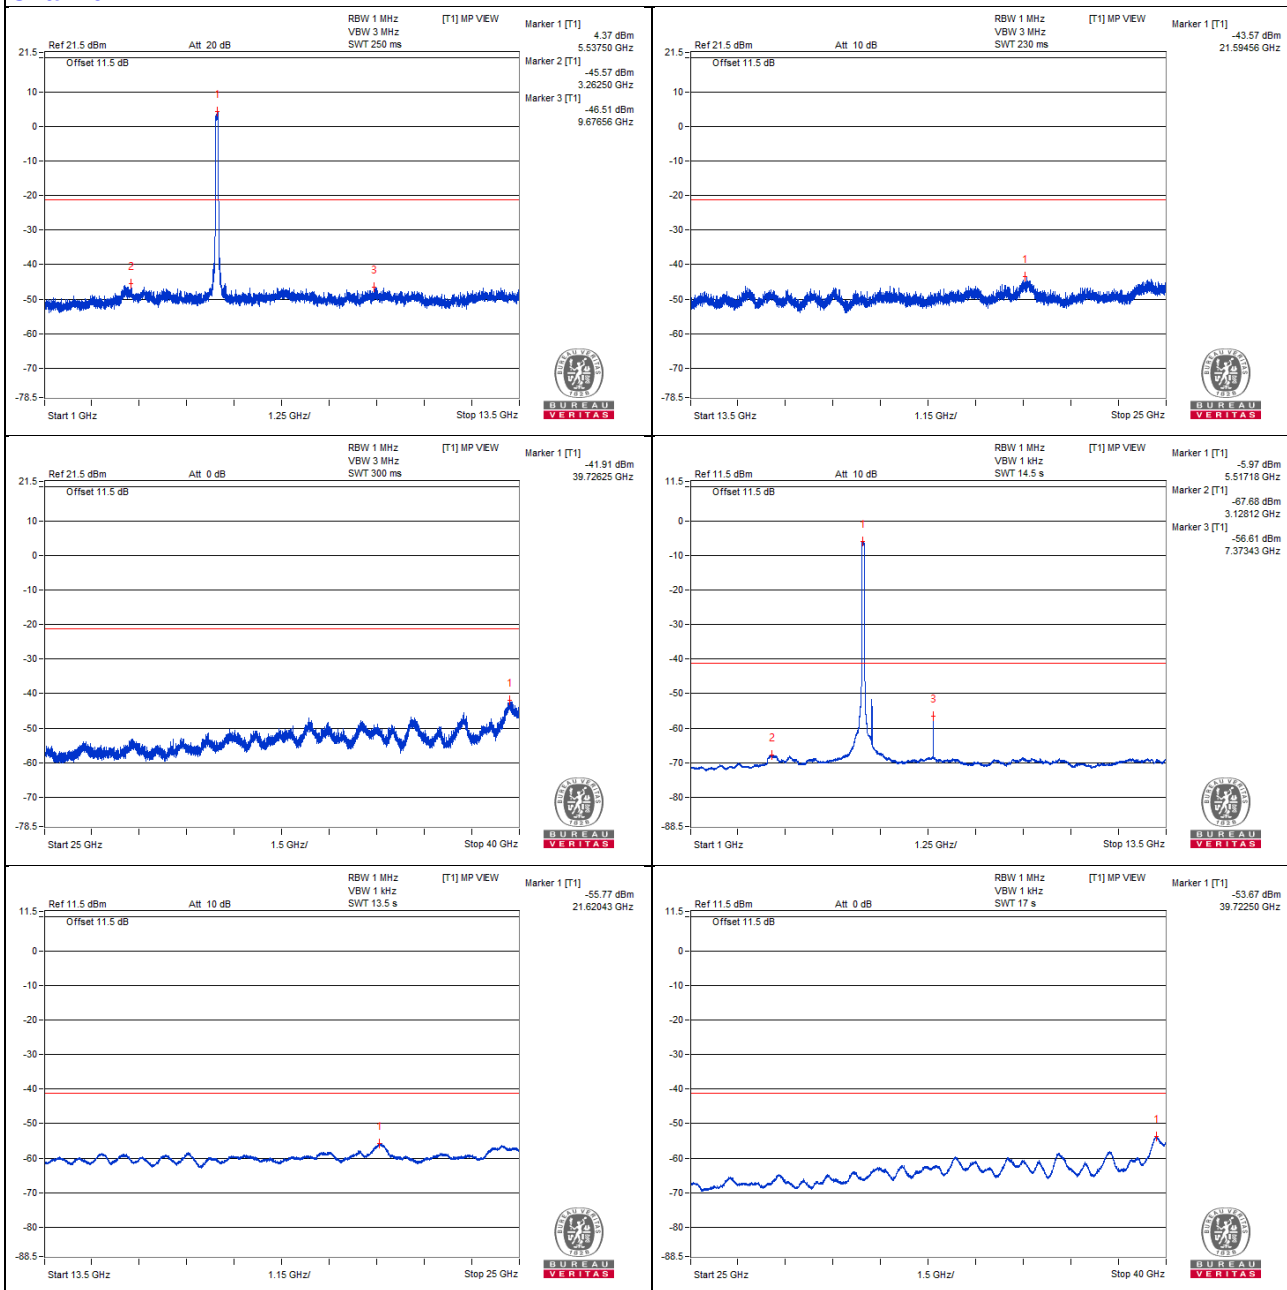

Chain 1

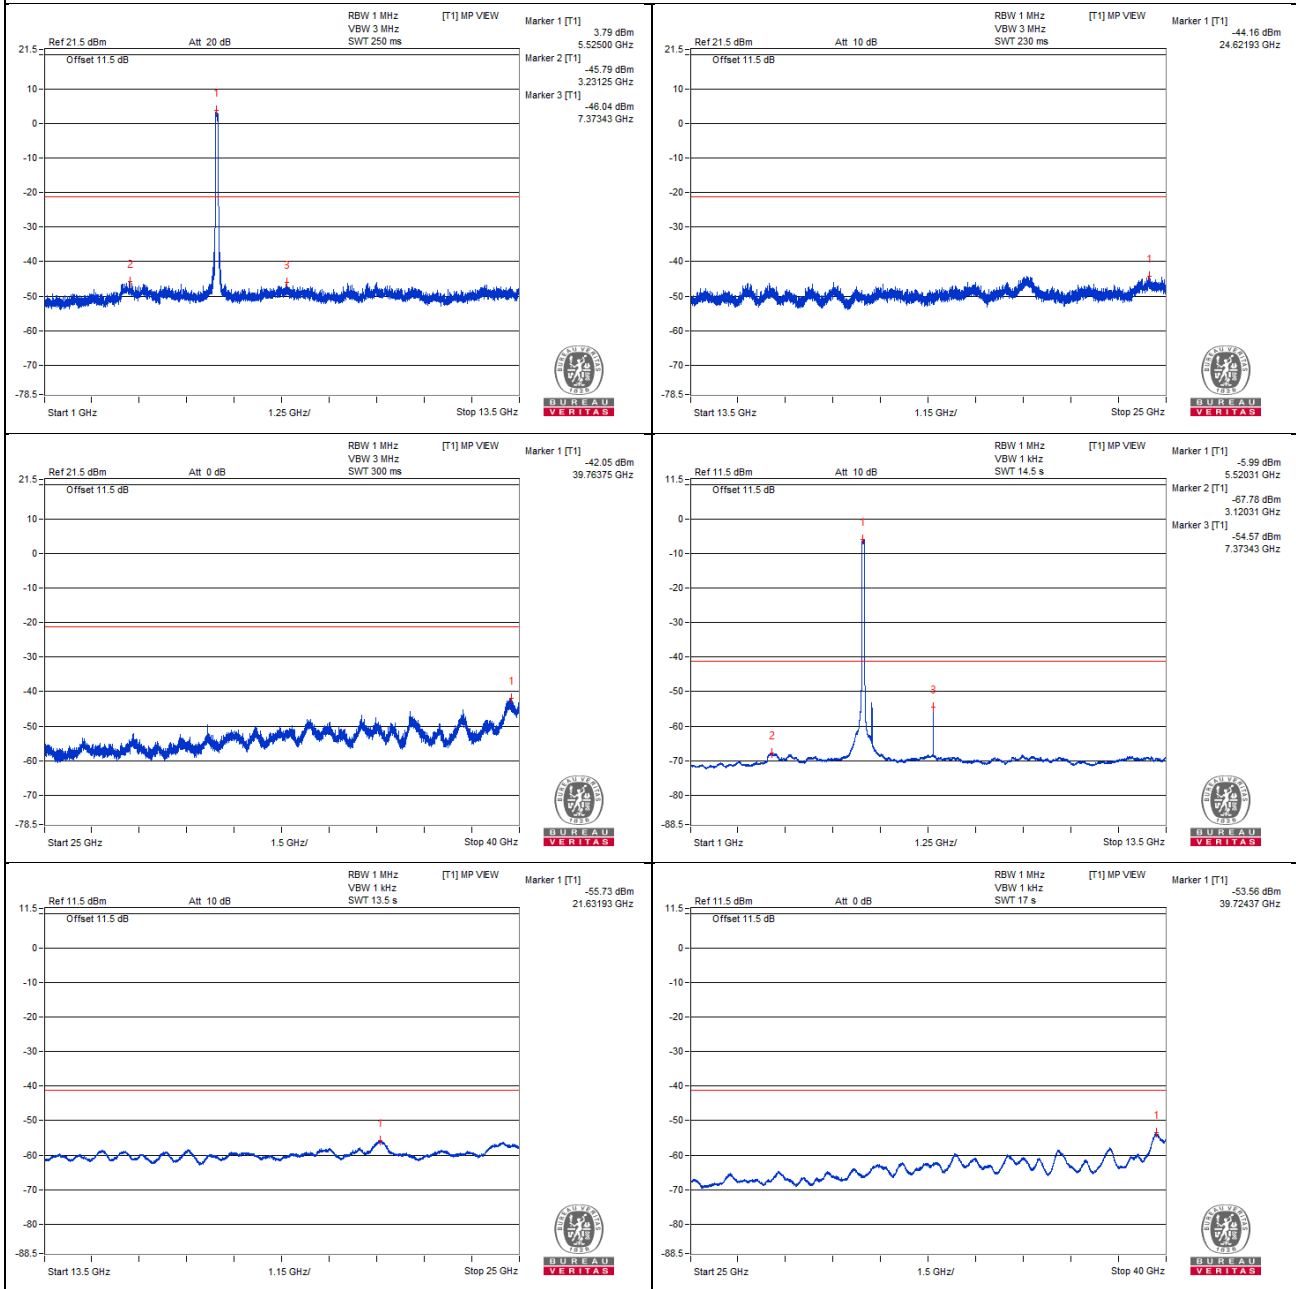

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5458.59 PK	68.93	74	-5.07	-38.85	-35.87	7.77	-26.33
2	5459.84 AV	51.61	54	-2.39	-53.95	-54.96	7.77	-43.65
3	5469.18 PK	72.56	68.2	* 4.36	-33.41	-33.55	7.77	-22.7

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

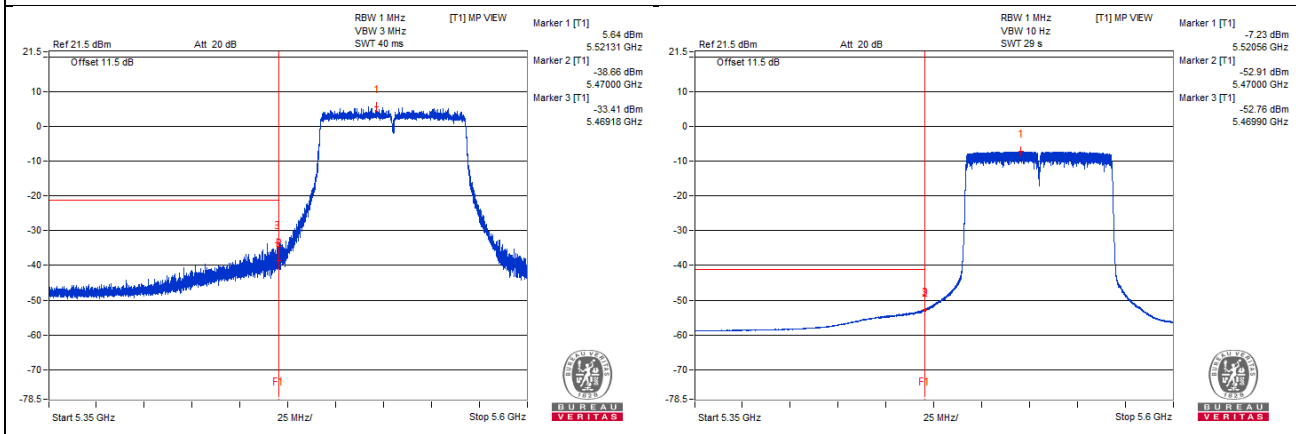

Chain 1

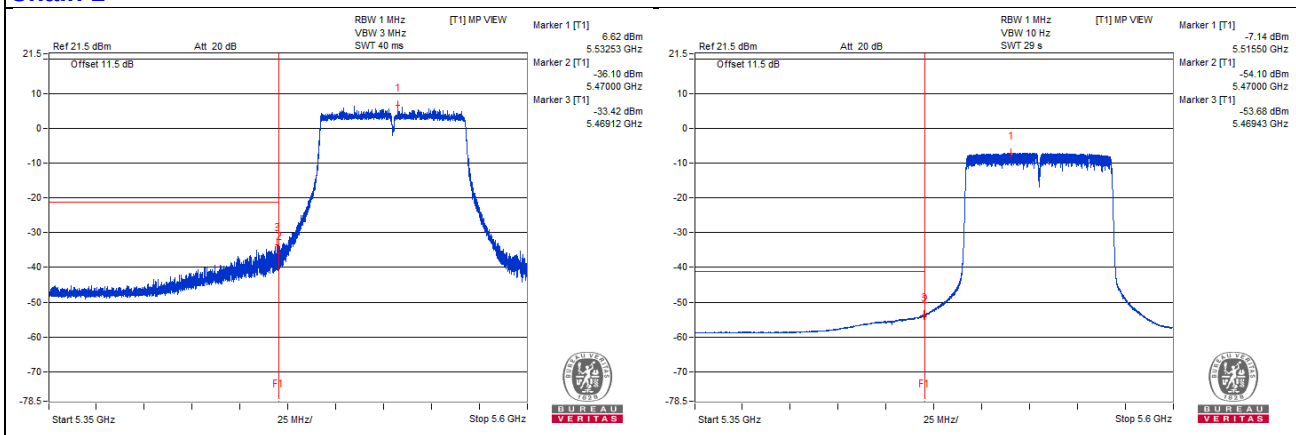

802.11ac (VHT80) - Channel 122

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3731.25 PK	58.14	74	-15.86	-48.92	-47.07	7.77	-37.12
2	3754.68 AV	36.95	54	-17.05	-69.01	-69.18	7.77	-58.31
3	7479.68 PK	58.34	74	-15.66	-47.32	-48.12	7.77	-36.92
4	7479.68 AV	47.01	54	-6.99	-59.32	-58.75	7.77	-48.25
5	11214.06 PK	56.56	74	-17.44	-49.38	-49.58	7.77	-38.7
6	11215.62 AV	36.04	54	-17.96	-69.87	-70.13	7.77	-59.22
7	16836.43 PK	62.53	68.2	-5.67	-42.72	-44.47	7.77	-32.73

Note :







Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

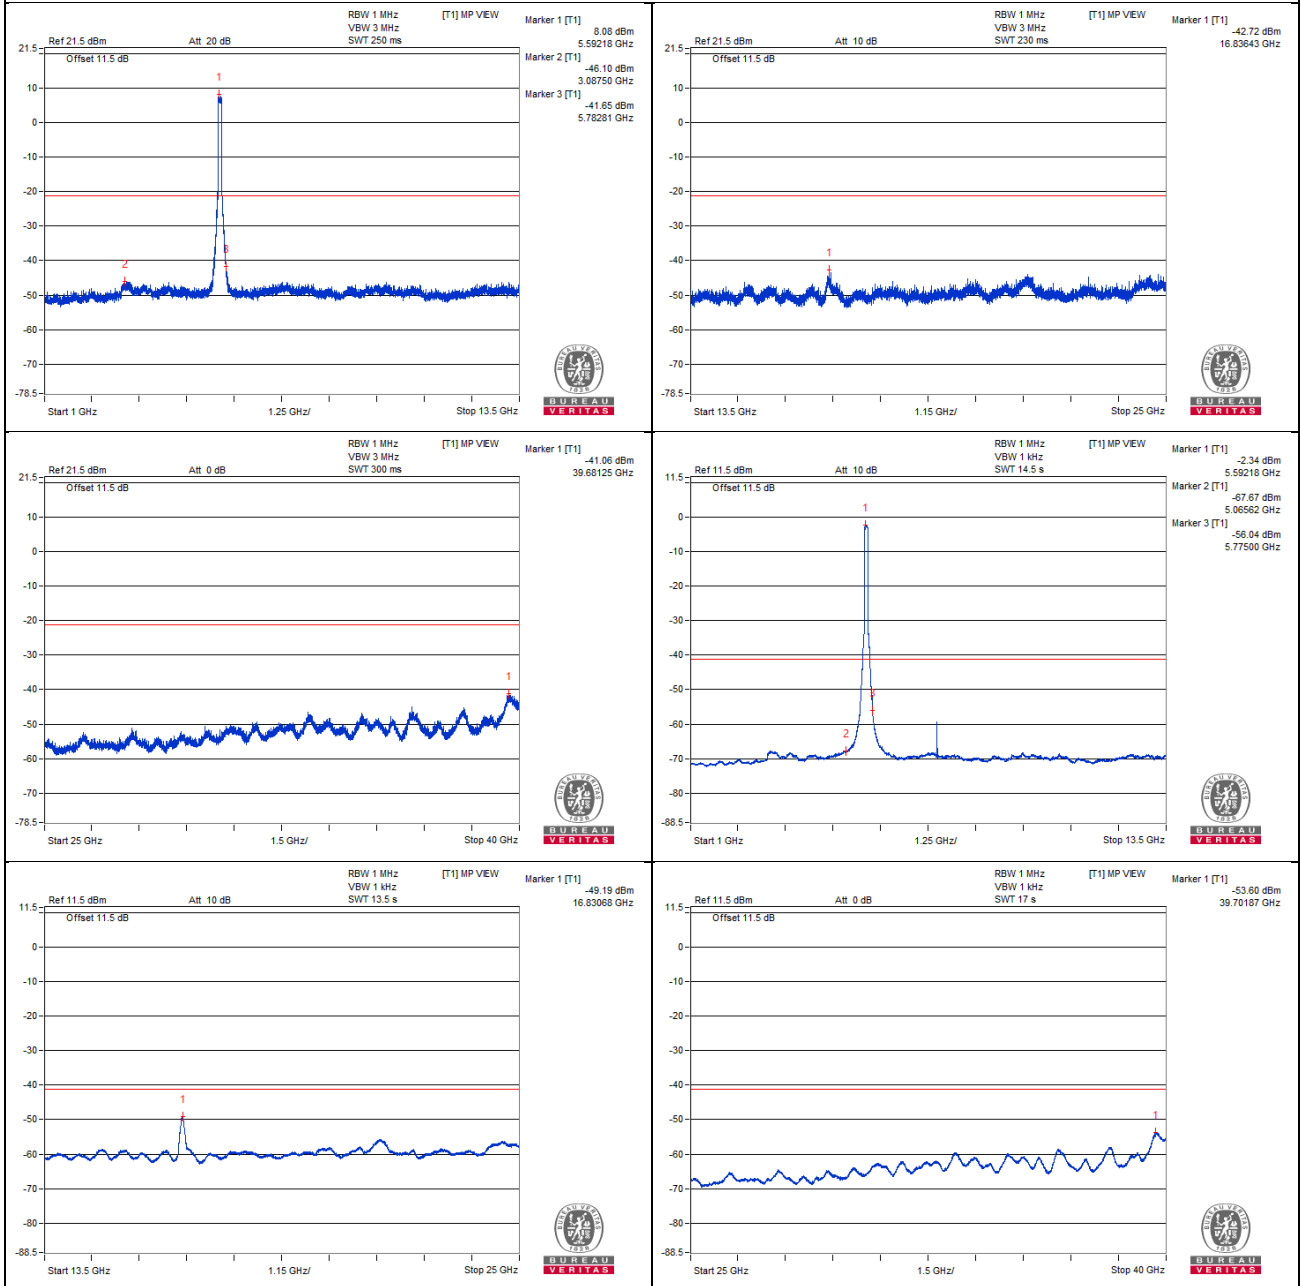

Chain 1

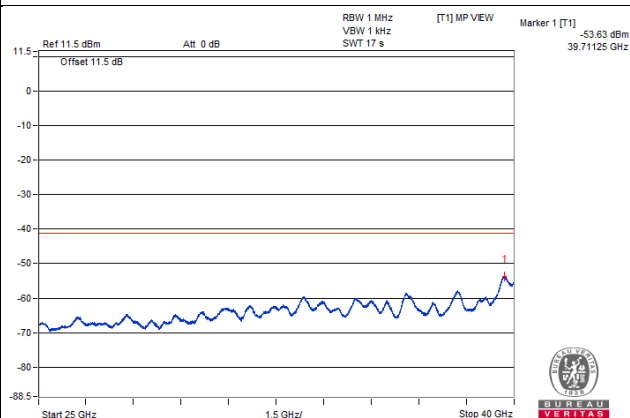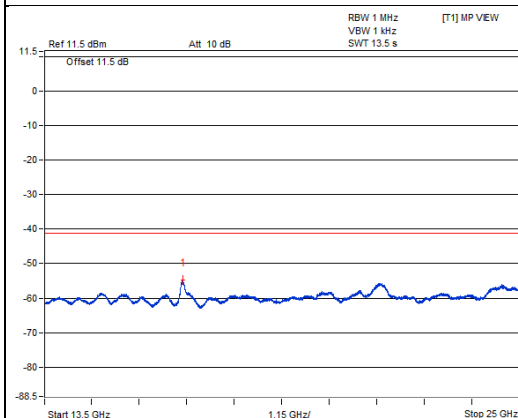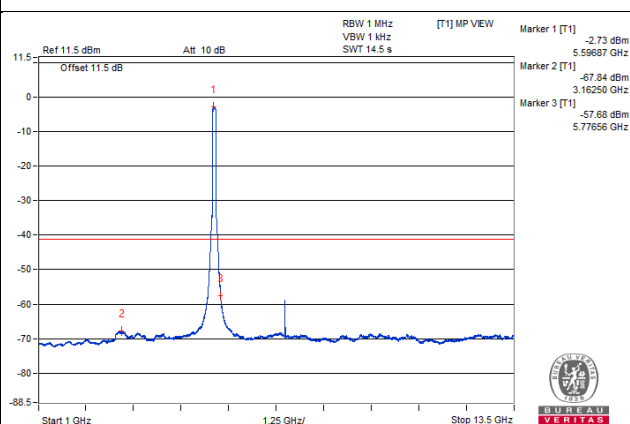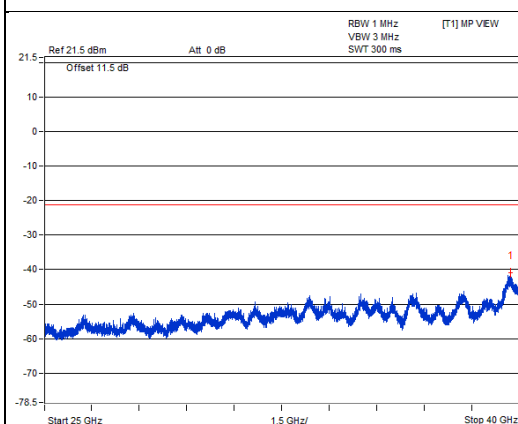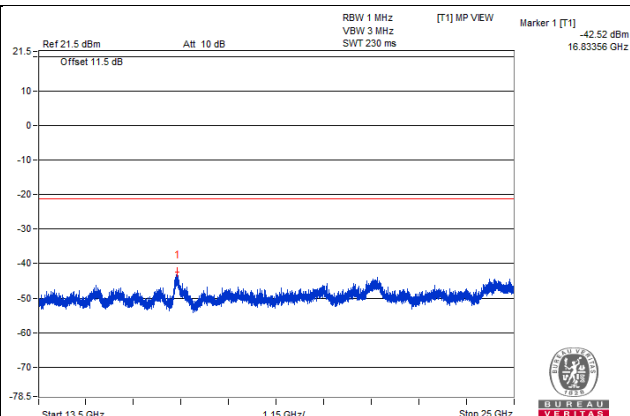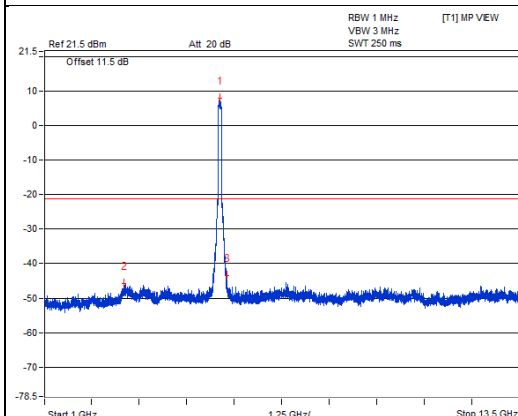

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5728.1 PK	71.94	68.2	* 3.74	-33.47	-34.84	7.77	-23.32


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

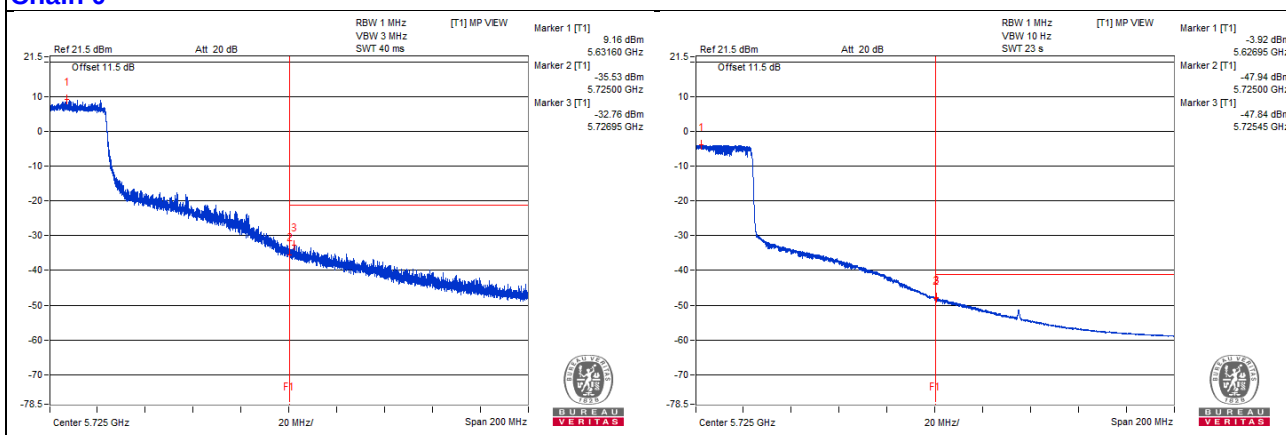

Chain 1

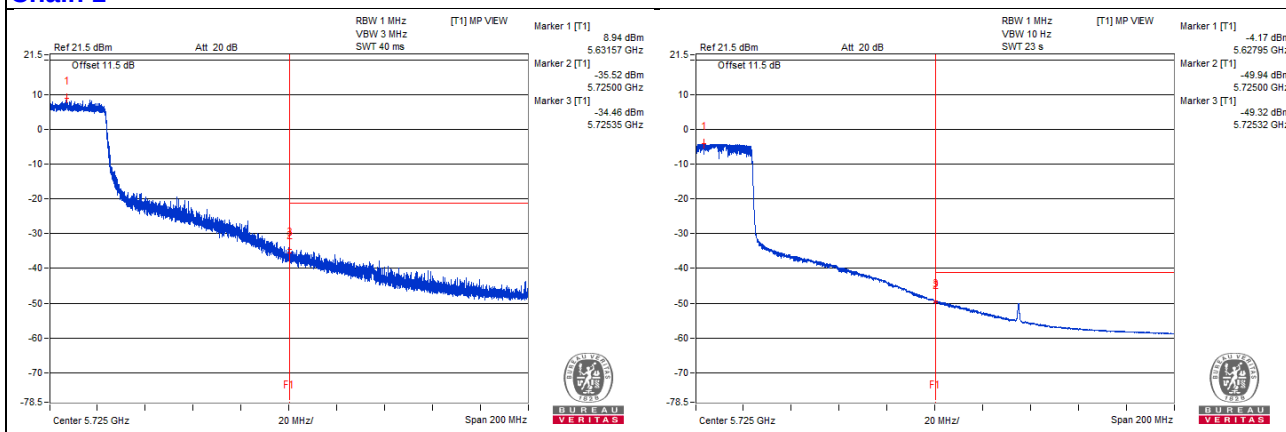

802.11ac (VHT80) - Channel 138

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3812.5 PK	57.52	74	-16.48	-48.38	-48.67	7.77	-37.74
2	3773.43 AV	36.68	54	-17.32	-69.23	-69.49	7.77	-58.58
3	7587.5 PK	57.55	74	-16.45	-48.62	-48.37	7.77	-37.71
4	7585.93 AV	43.94	54	-10.06	-62.47	-61.76	7.77	-51.32
5	11385.93 PK	56.43	74	-17.57	-49.48	-49.74	7.77	-38.83
6	11360.93 AV	36.03	54	-17.97	-69.68	-70.36	7.77	-59.23
7	17060.68 PK	65.11	68.2	-3.09	-40.31	-41.65	7.77	-30.15

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

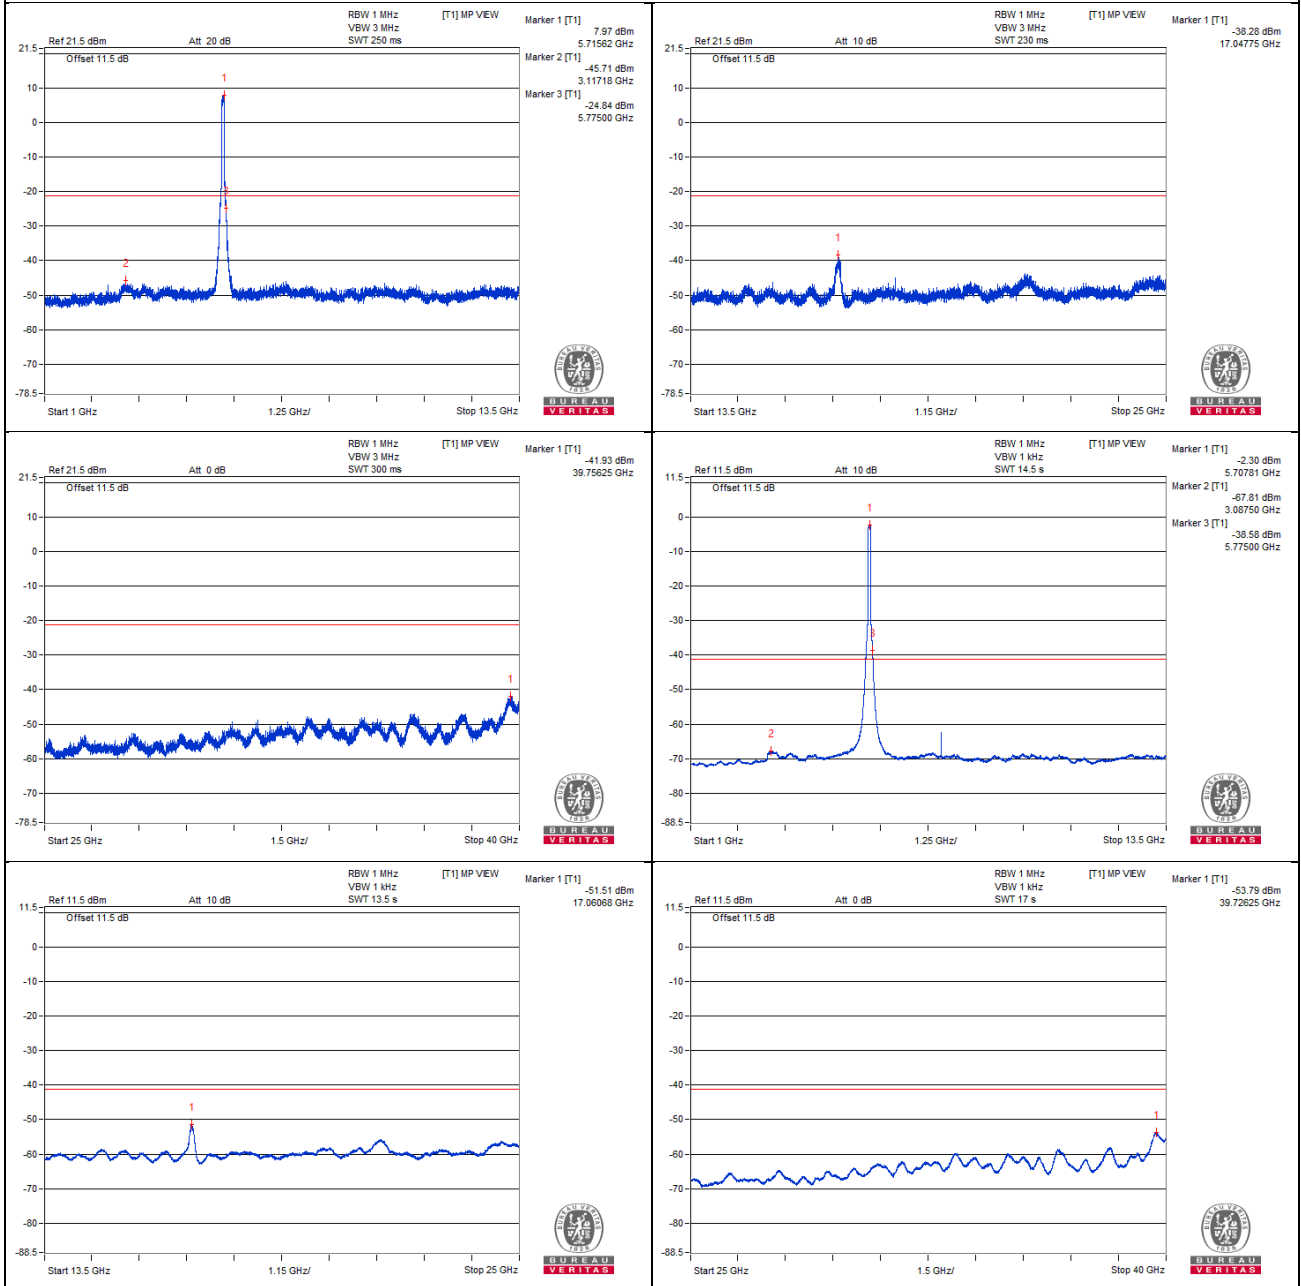

Chain 1

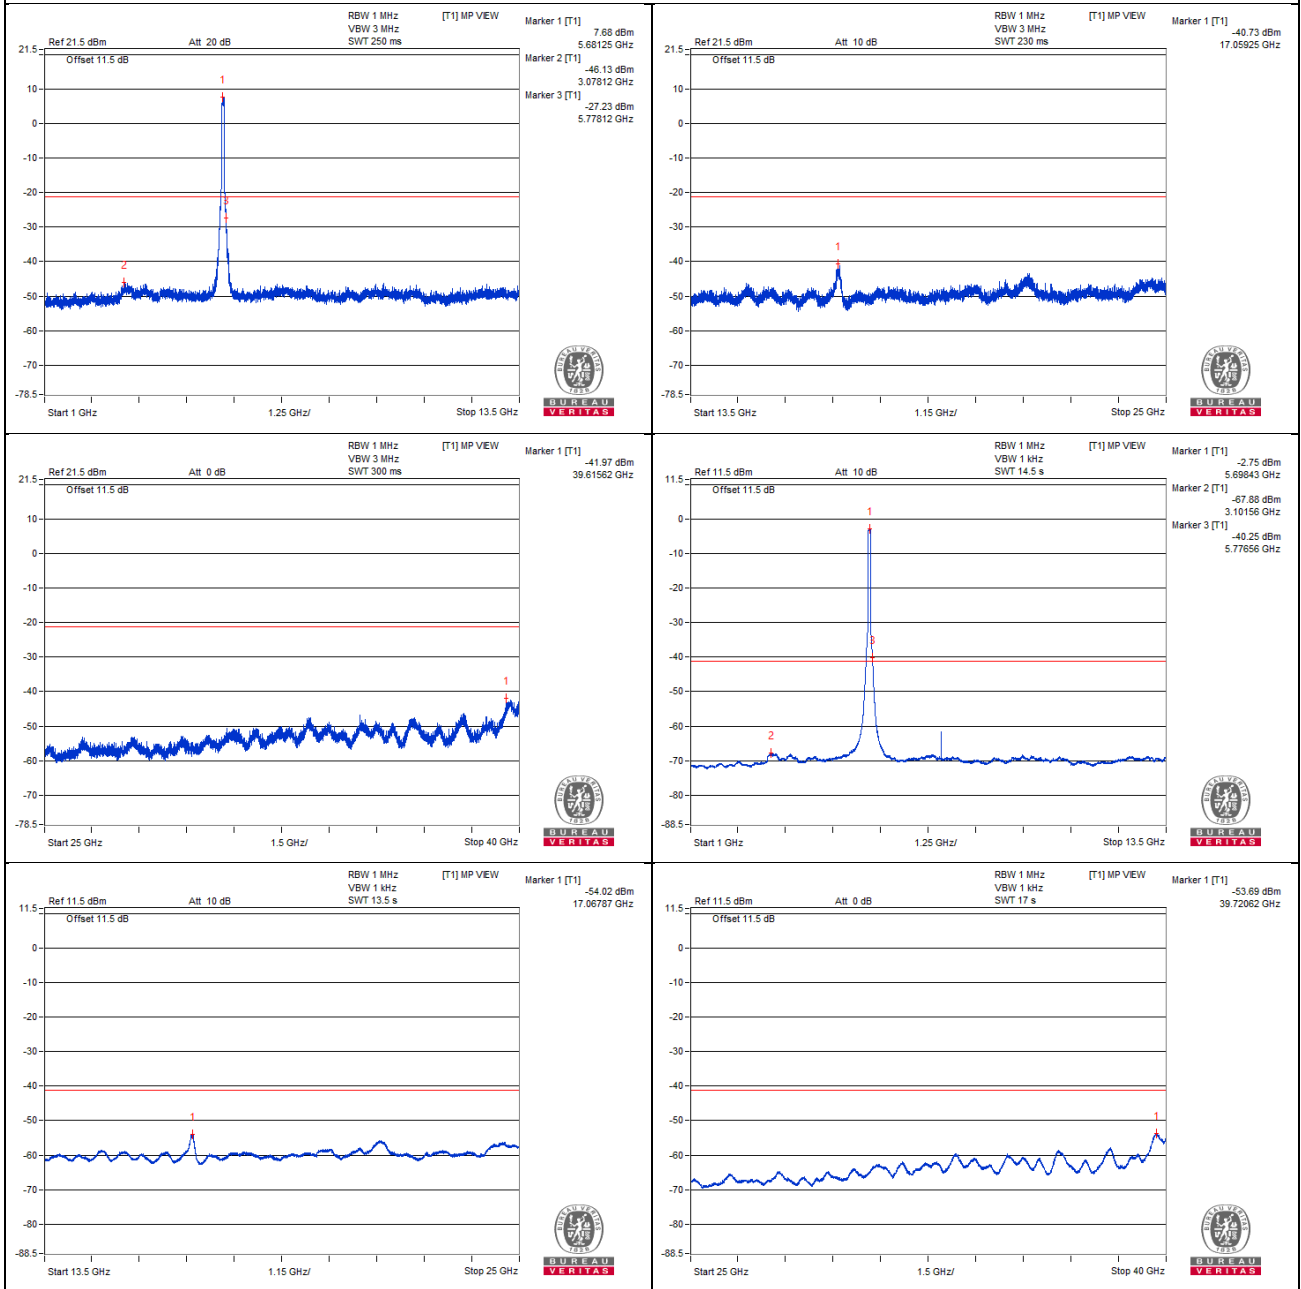

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5850.51 PK	66.01	68.2	-2.19	-40.45	-39.64	7.77	-29.25

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

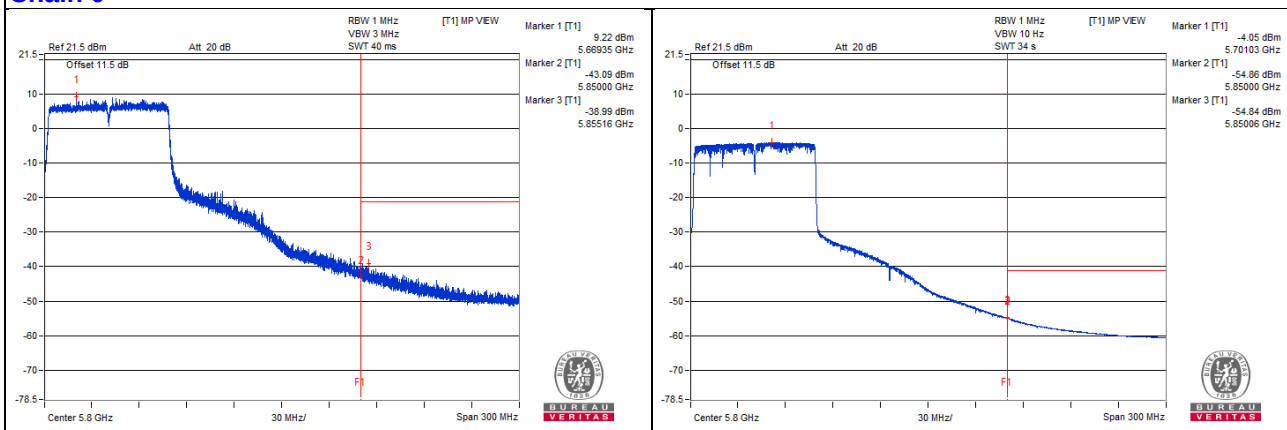

Chain 1

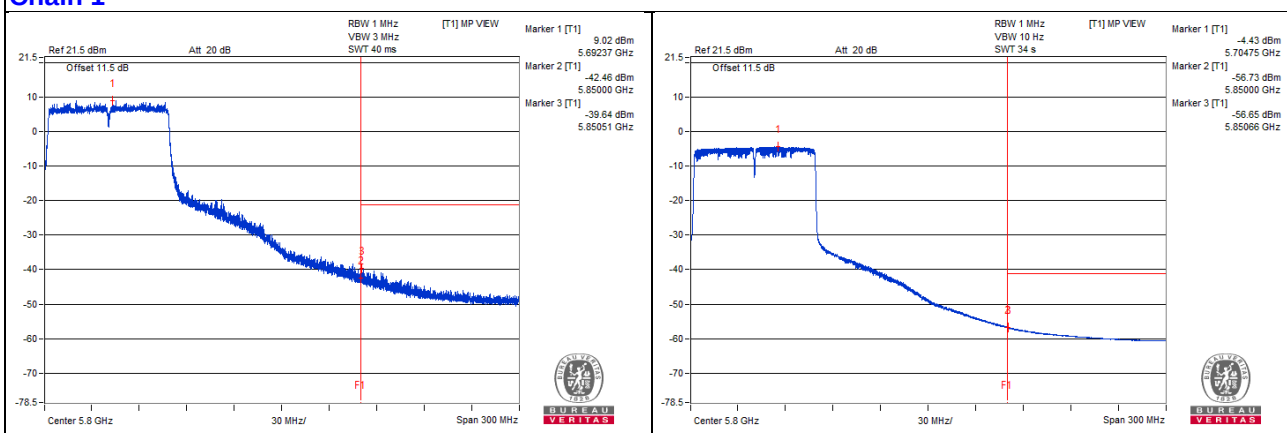

802.11ac (VHT80) – Channel 155

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3837.5 PK	56.34	74	-17.66	-49.14	-50.35	7.77	-38.92
2	3856.25 AV	44.07	54	-9.93	-61.96	-61.99	7.77	-51.19
3	7714.06 PK	56.39	74	-17.61	-48.78	-50.73	7.77	-38.87
4	7700 AV	45.64	54	-8.36	-60.43	-60.37	7.77	-49.62
5	11553.12 PK	54.94	74	-19.06	-50.74	-51.49	7.77	-40.32
6	11542.18 AV	43.3	54	-10.7	-62.82	-62.66	7.77	-51.96
7	17320.87 PK	57.82	68.2	-10.38	-46.77	-50.41	7.77	-37.44

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

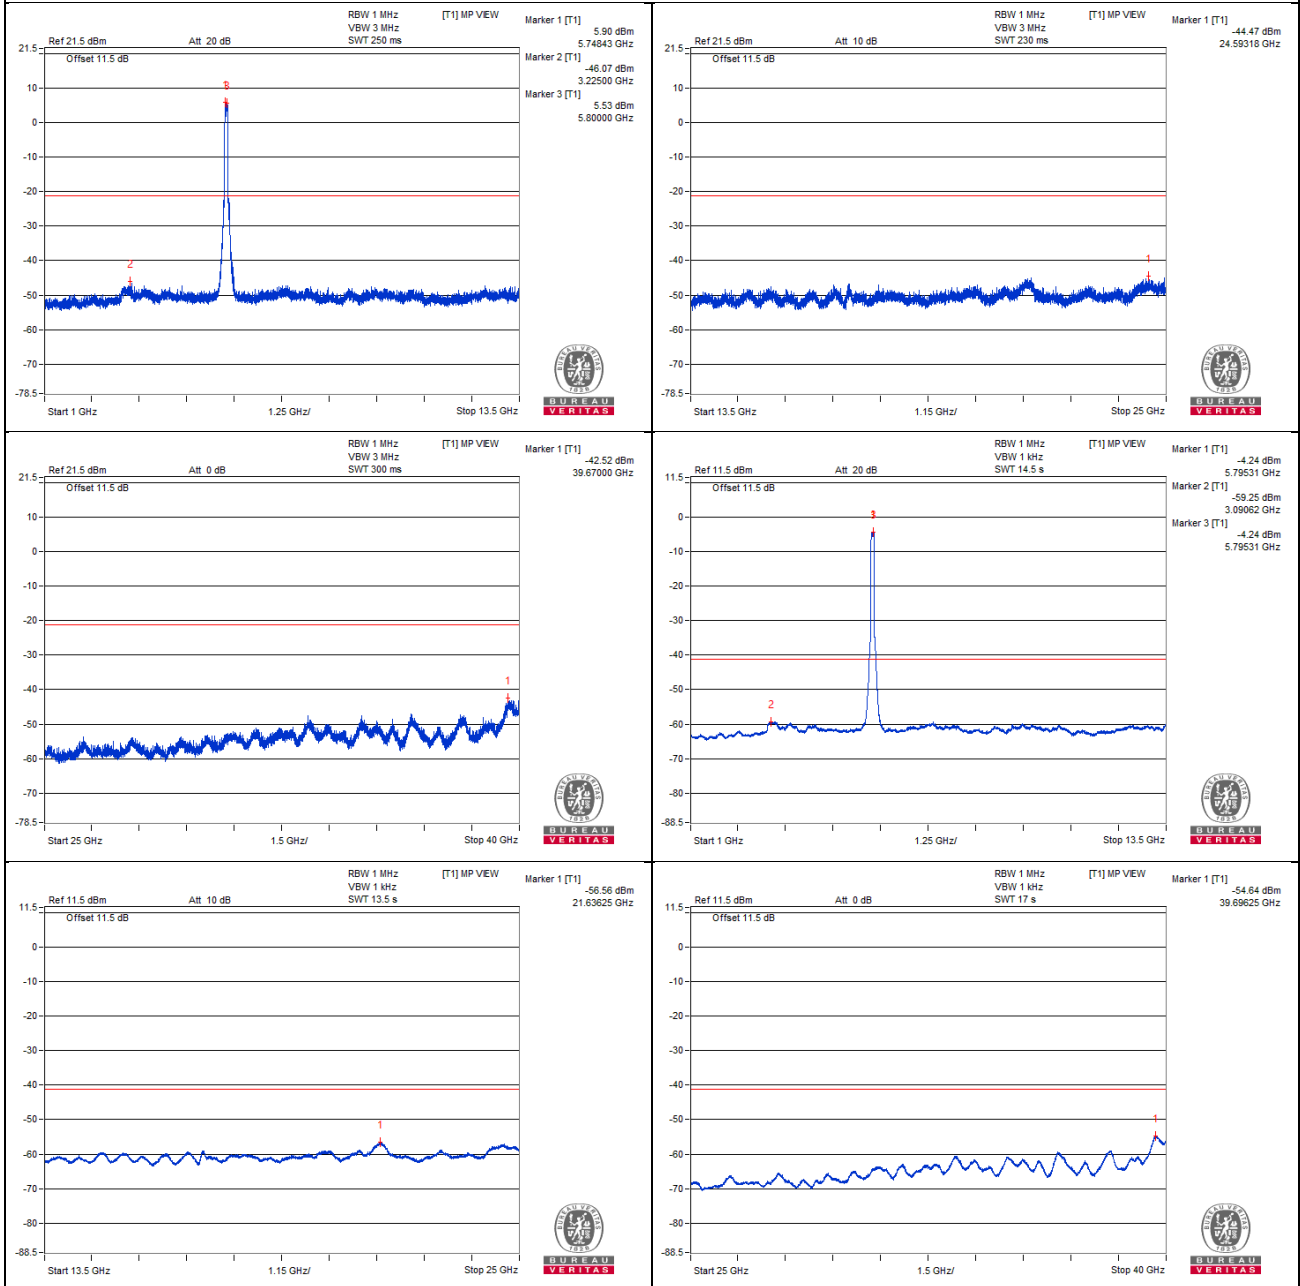


Chain 1

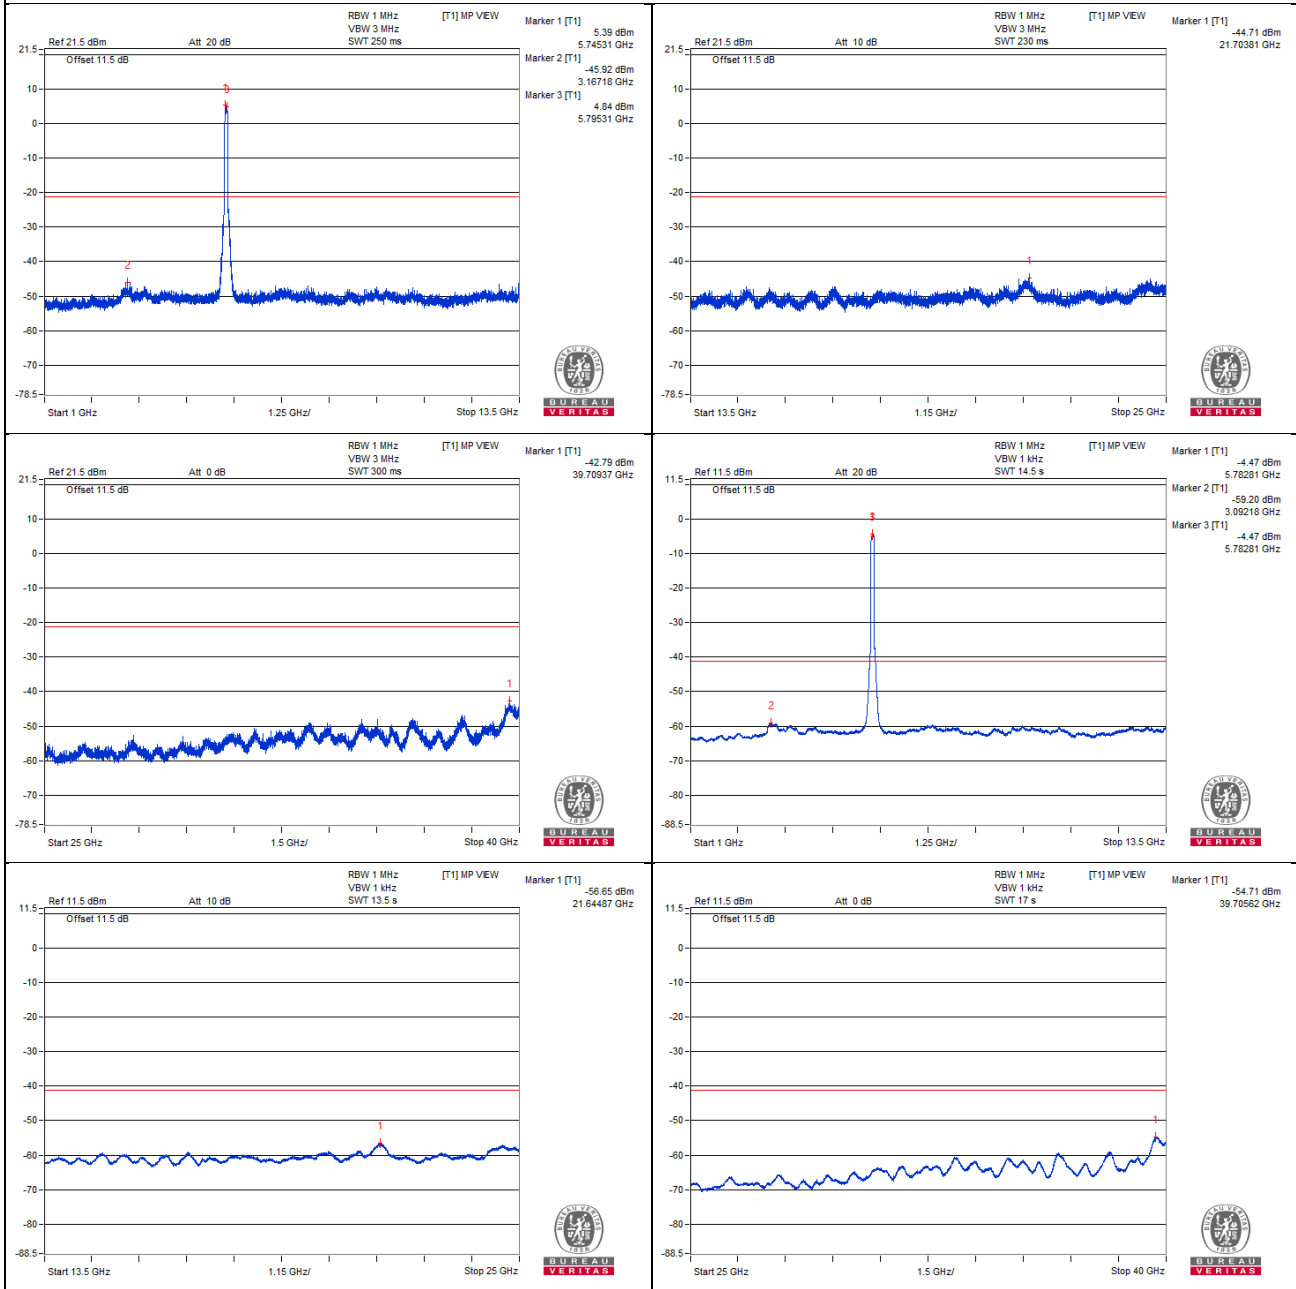


Bandedge table

Chain 0

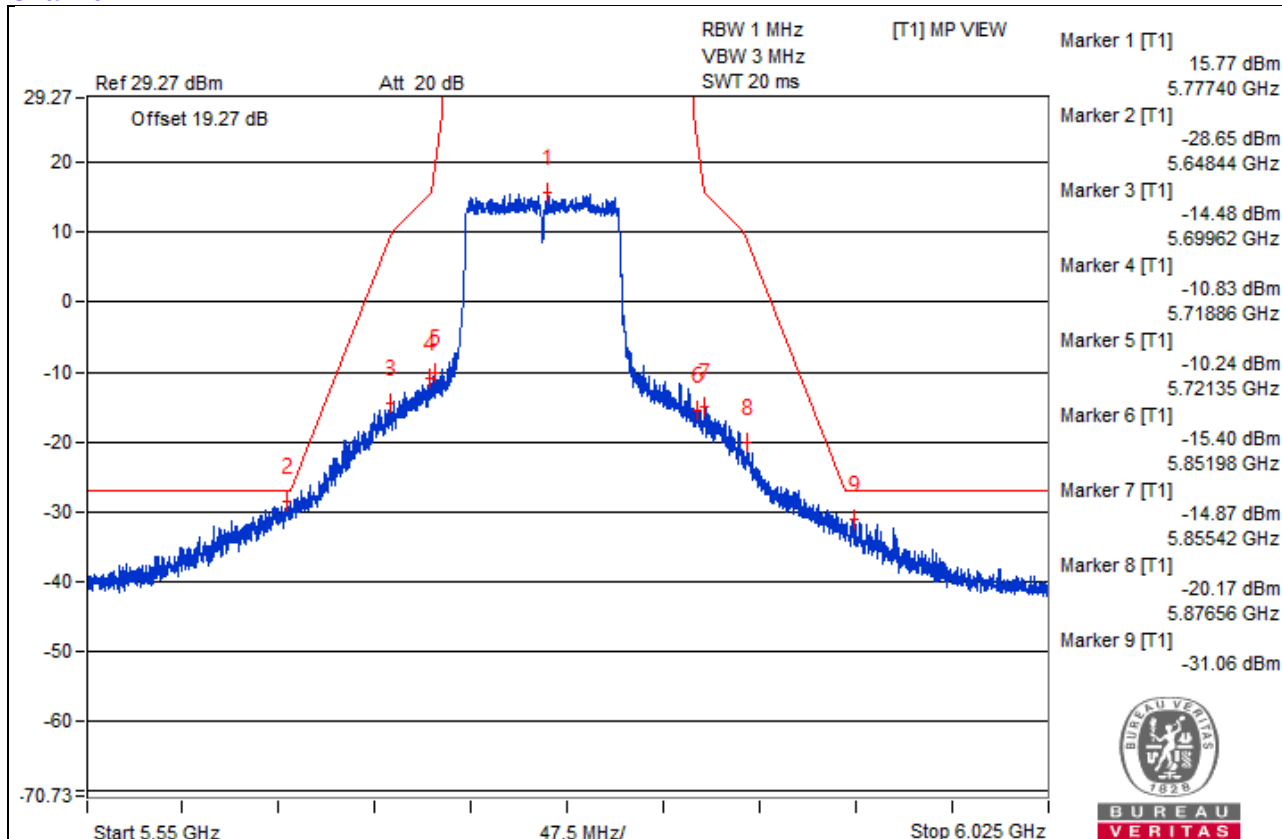

Chain 1

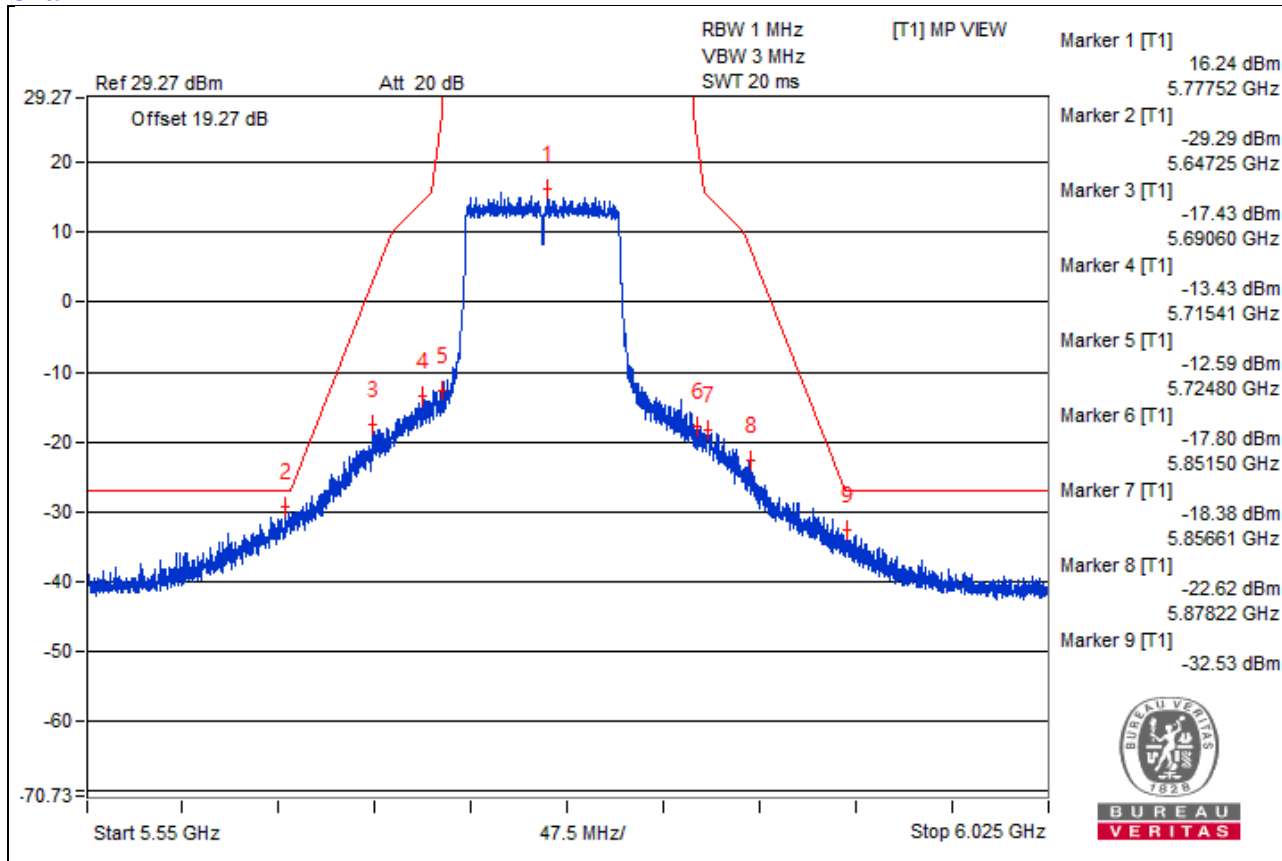

802.11ax (HE20) - Channel 36

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3448.43 PK	55.84	68.2	-12.36	-49.62	-47.64	6.09	-39.42
2	6906.25 PK	57.43	68.2	-10.77	-47.61	-46.35	6.09	-37.83
3	10356.25 PK	56.79	68.2	-11.41	-47.84	-47.31	6.09	-38.47
4	15539.81 PK	59.25	74	-14.75	-51.01	-42.7	6.09	-36.01
5	15541.25 AV	46.08	54	-7.92	-59.46	-57.35	6.09	-49.18

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0



Chain 1



Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5149.52 PK	74.74	74	* 0.74	-30.72	-28.74	6.09	-20.52
2	5149.97 AV	56.05	54	* 2.05	-50.71	-46.77	6.09	-39.21


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

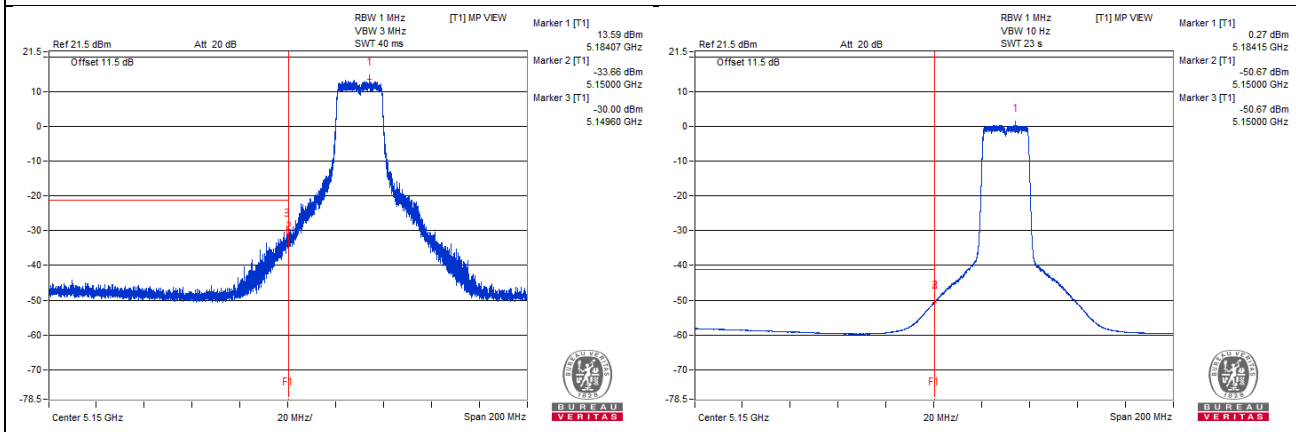

Chain 1

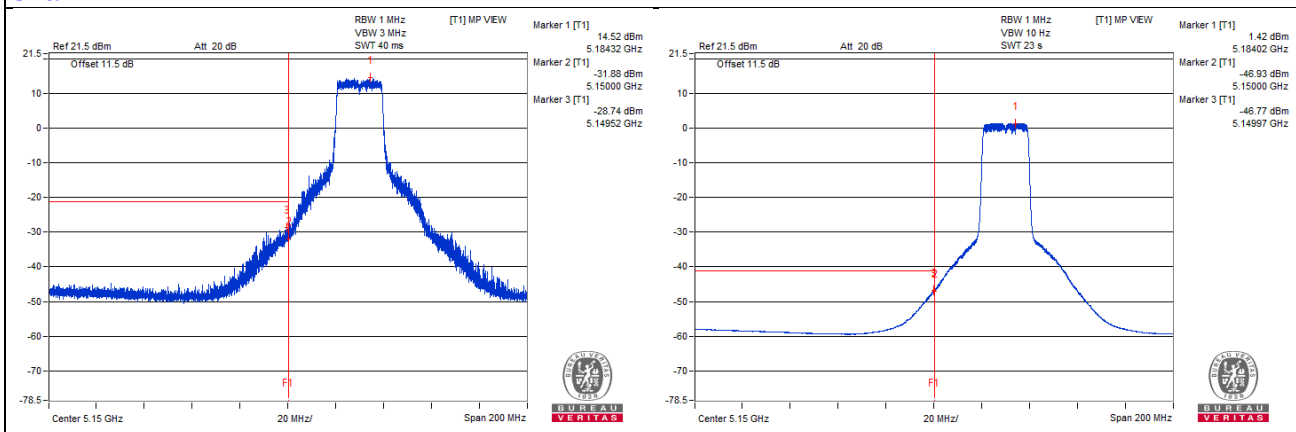

802.11ax (HE20) - Channel 40


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3475 PK	55.2	68.2	-13	-48.36	-50.14	6.09	-40.06
2	6932.81 PK	57.16	68.2	-11.04	-47.64	-46.81	6.09	-38.1
3	10410.93 PK	55.33	68.2	-12.87	-49.32	-48.76	6.09	-39.93
4	15594.43 PK	61.93	74	-12.07	-50.66	-39.76	6.09	-33.33
5	15597.31 AV	46.81	54	-7.19	-60	-56	6.09	-48.45

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

Chain 0

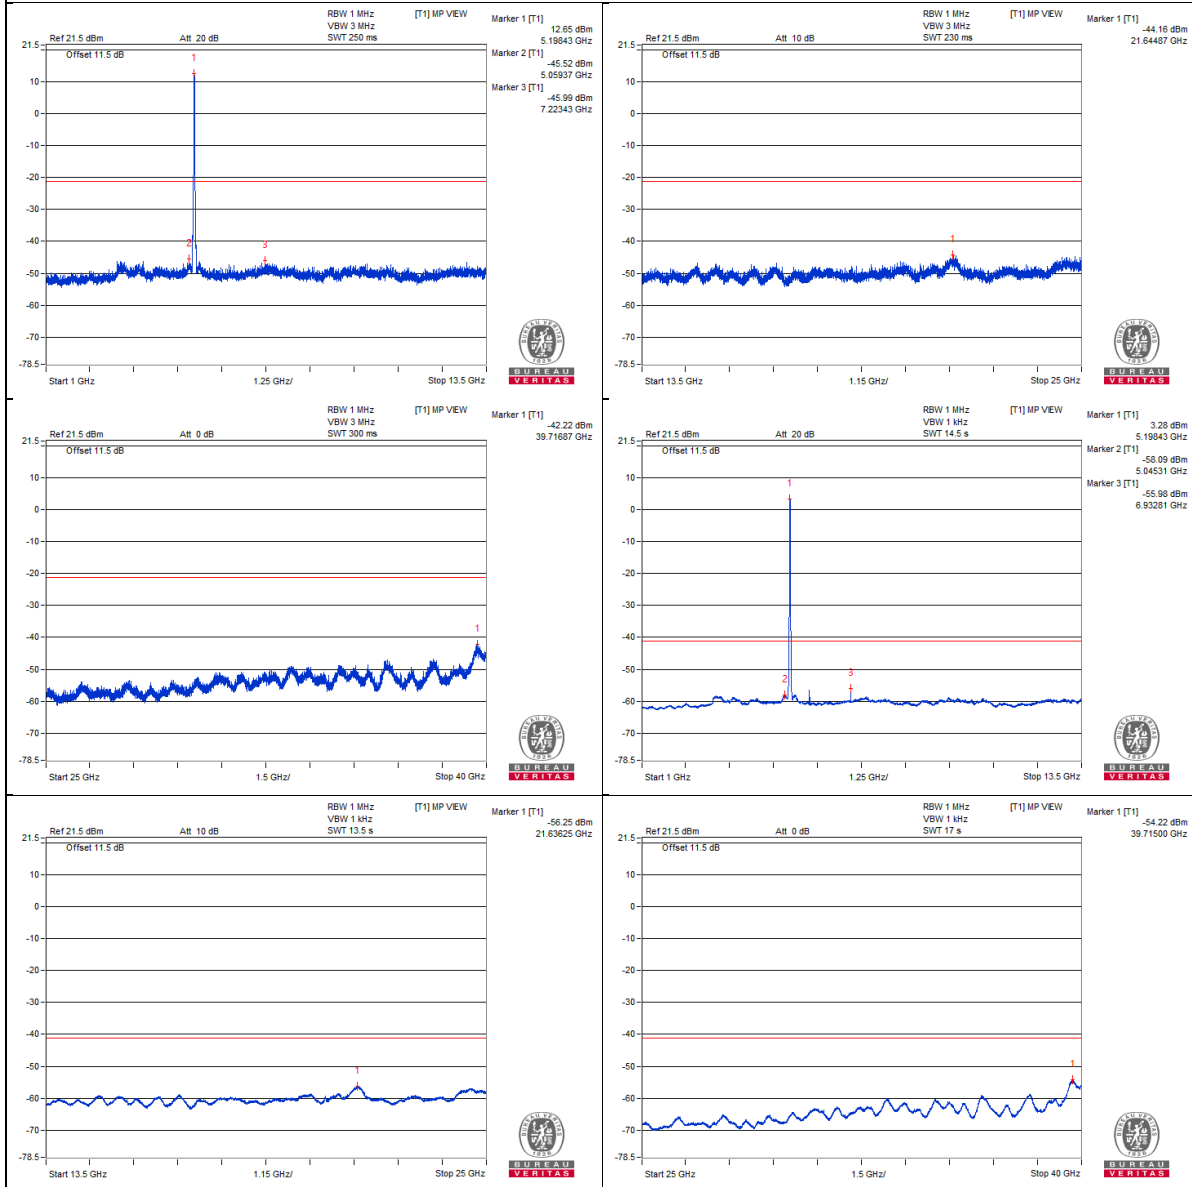

Chain 1



Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5148.25 PK	68.65	74	-5.35	-38.13	-34.16	6.09	-26.61
2	5150 AV	47.91	54	-6.09	-56.92	-56.03	6.09	-47.35

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

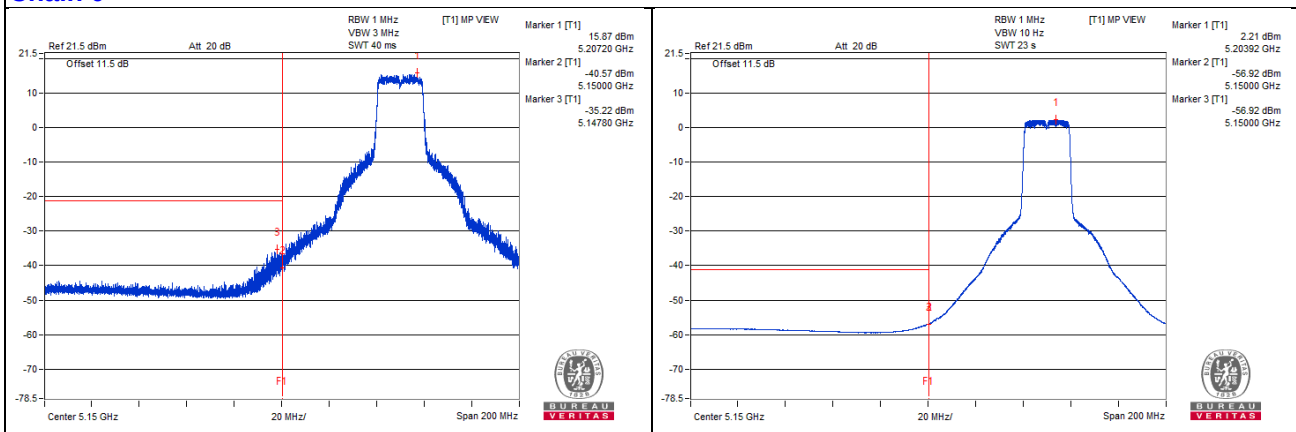

Chain 1

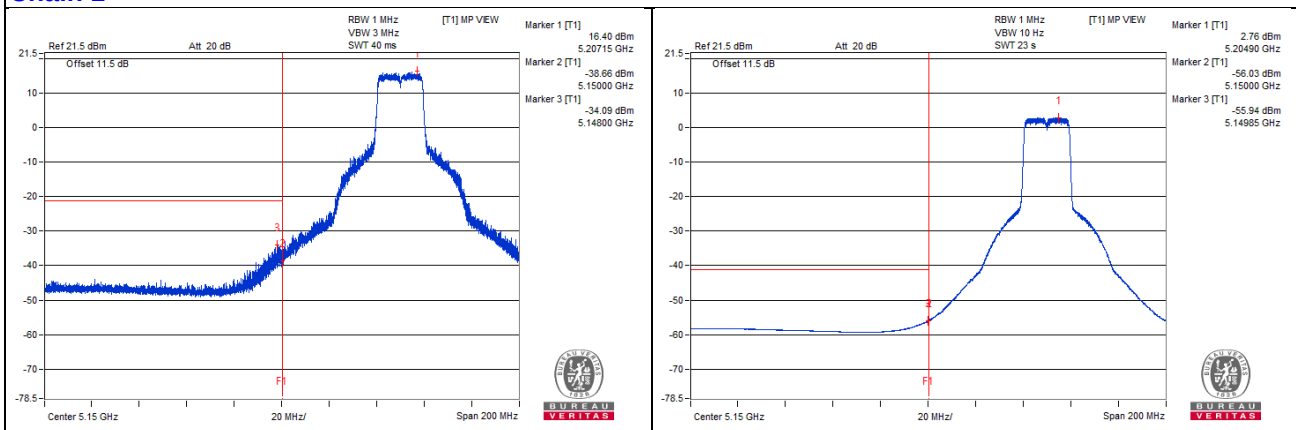

802.11ax (HE20) - Channel 48

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3506.25 PK	55.11	74	-18.89	-50.08	-48.55	6.09	-40.15
2	3507.81 AV	44.66	54	-9.34	-59.81	-59.6	6.09	-50.6
3	6985.93 PK	57.06	68.2	-11.14	-49.62	-45.8	6.09	-38.2
4	10464.06 PK	54.77	68.2	-13.43	-50.12	-49.12	6.09	-40.49
5	15725.25 PK	58.9	74	-15.1	-51.7	-43	6.09	-36.36
6	15719.5 AV	46.43	54	-7.57	-60.97	-56.16	6.09	-48.83

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

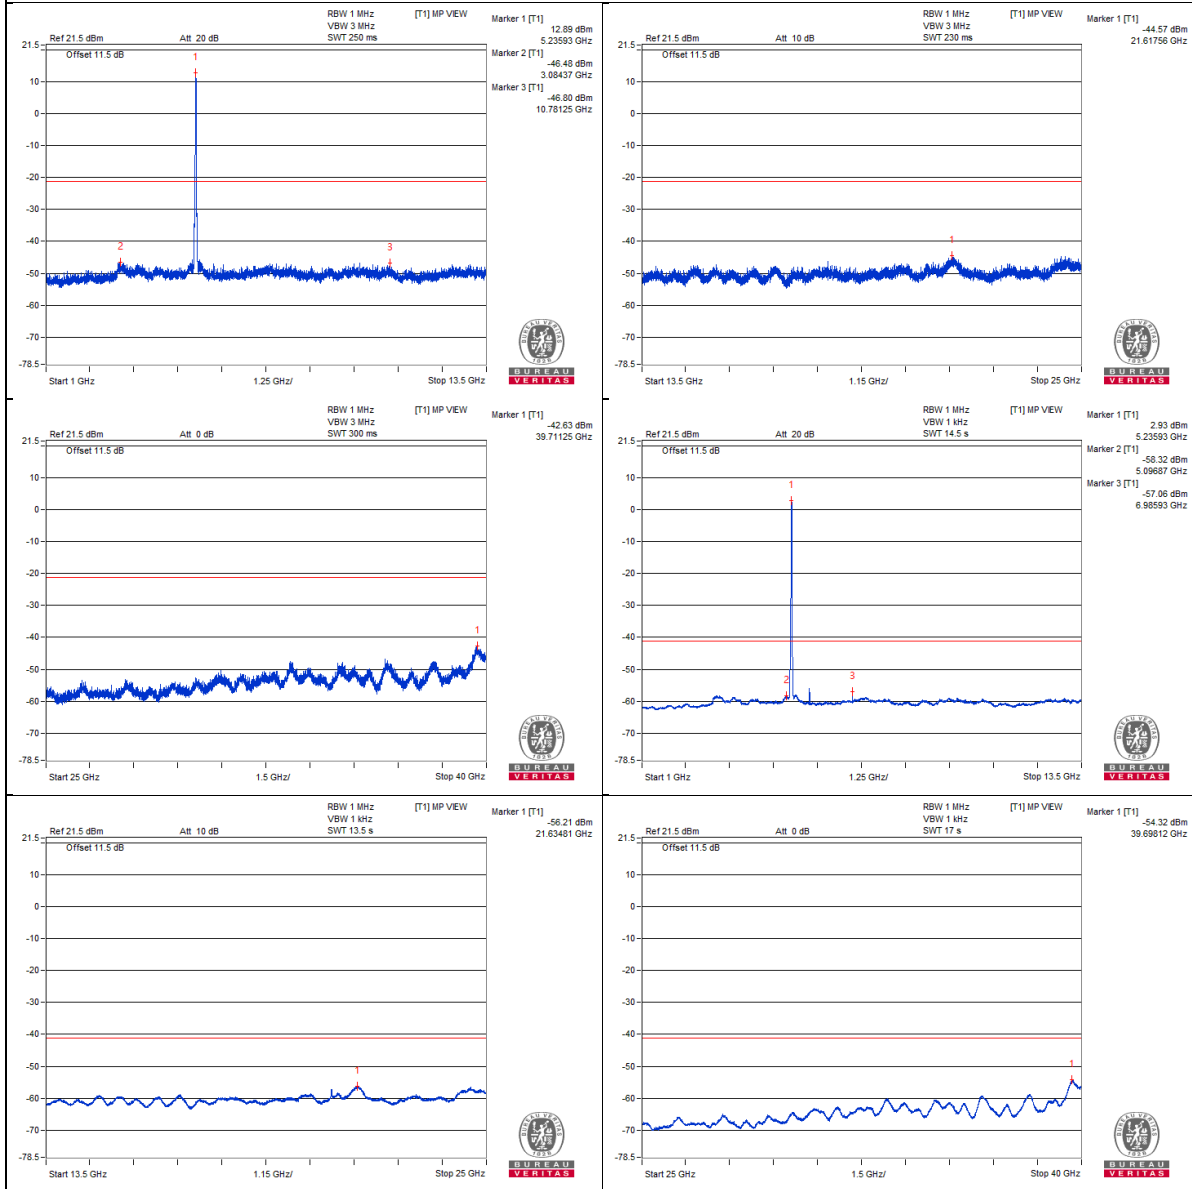

Chain 1



Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5082 PK	59.1	74	-14.9	-47.01	-44.02	6.09	-36.16
2	5086.87 AV	45.86	54	-8.14	-58.73	-58.28	6.09	-49.4

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

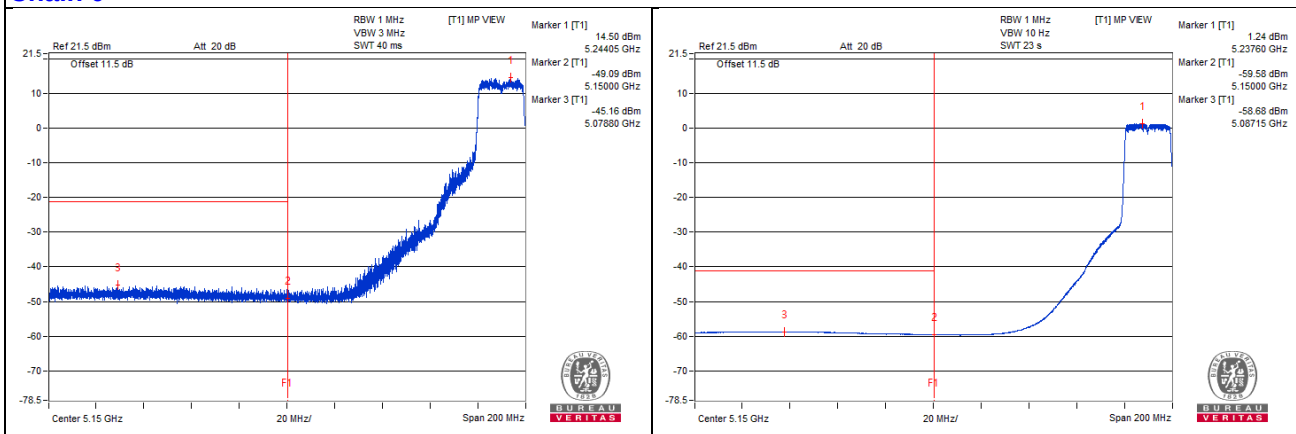

Chain 1

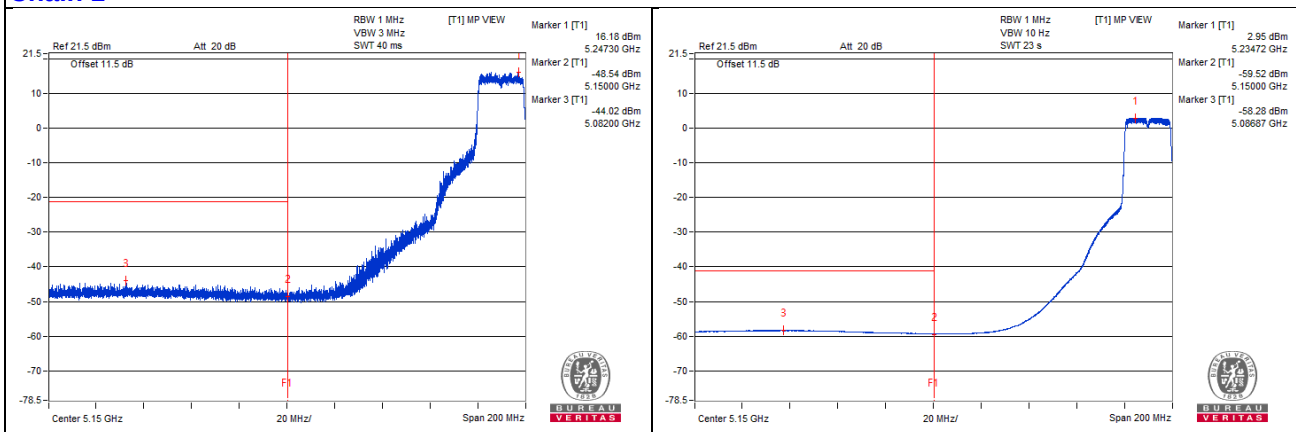

802.11ax (HE20) - Channel 52

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3520.31 PK	56.61	74	-17.39	-49.65	-46.44	6.09	-38.65
2	3523.43 AV	44.96	54	-9.04	-59.5	-59.31	6.09	-50.3
3	7014.06 PK	57.08	68.2	-11.12	-48.39	-46.4	6.09	-38.18
4	10525 PK	55.29	68.2	-12.91	-48.42	-49.84	6.09	-39.97
5	15774.12 PK	59.68	74	-14.32	-51.6	-42.14	6.09	-35.58
6	15781.31 AV	46.96	54	-7.04	-60.02	-55.78	6.09	-48.3

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

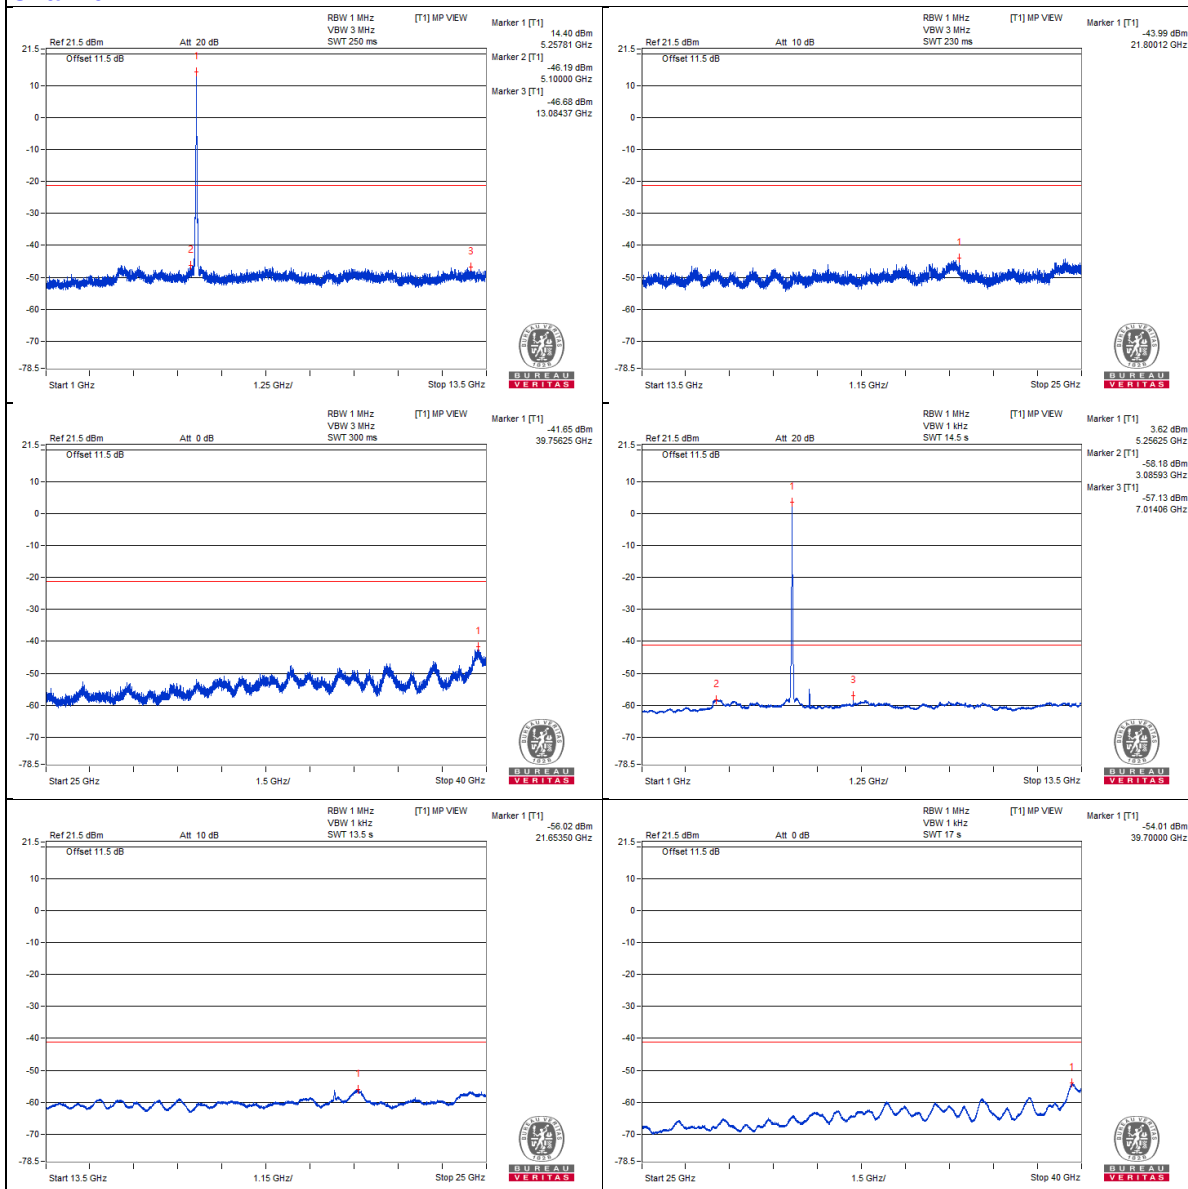

Chain 1

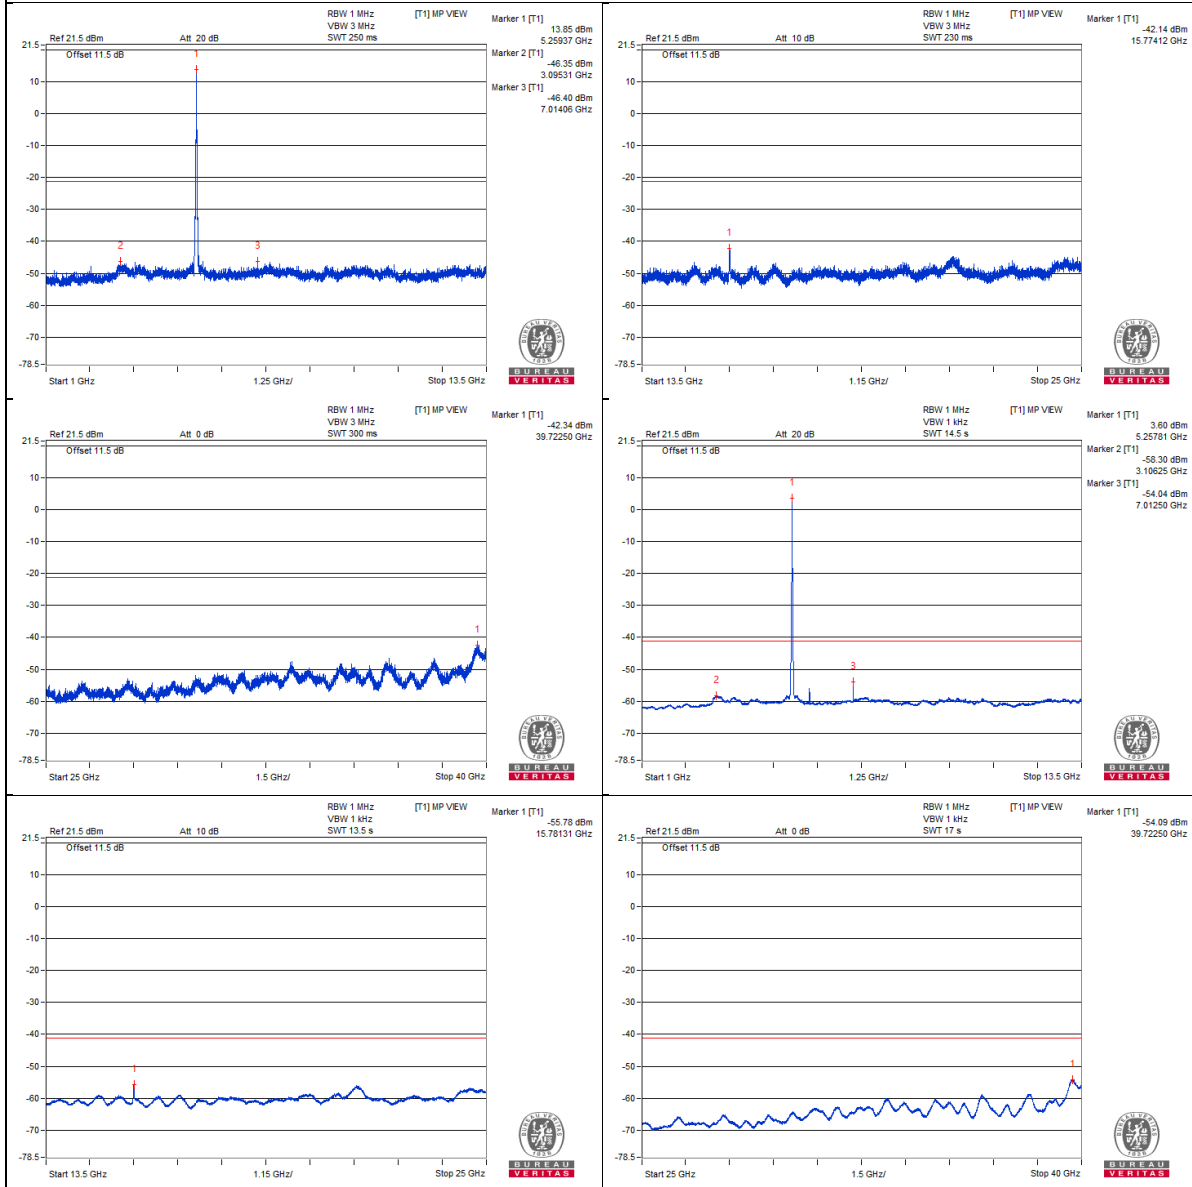

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5414.57 PK	58.52	74	-15.48	-46.57	-45.22	6.09	-36.74
2	5380.95 AV	45.66	54	-8.34	-58.87	-58.53	6.09	-49.6

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

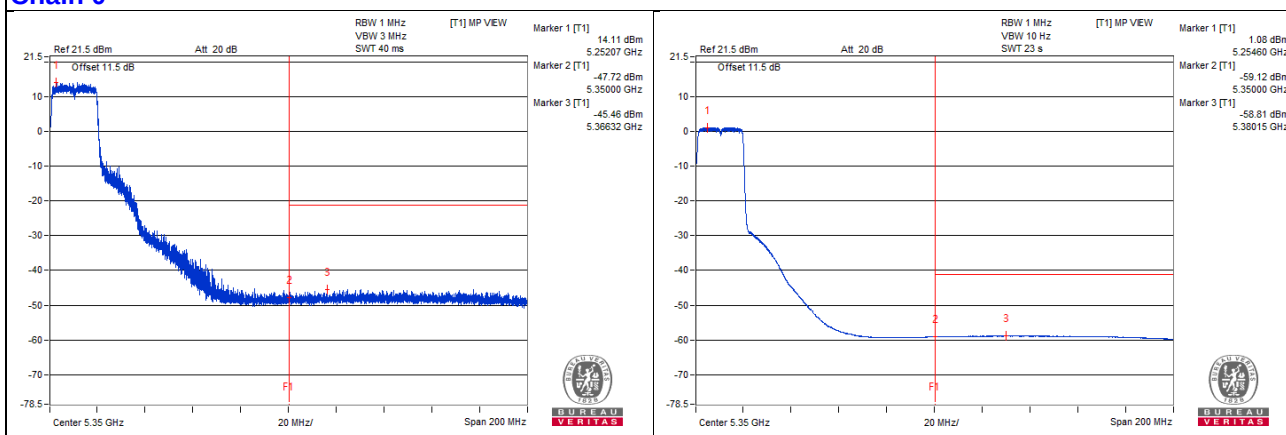

Chain 1

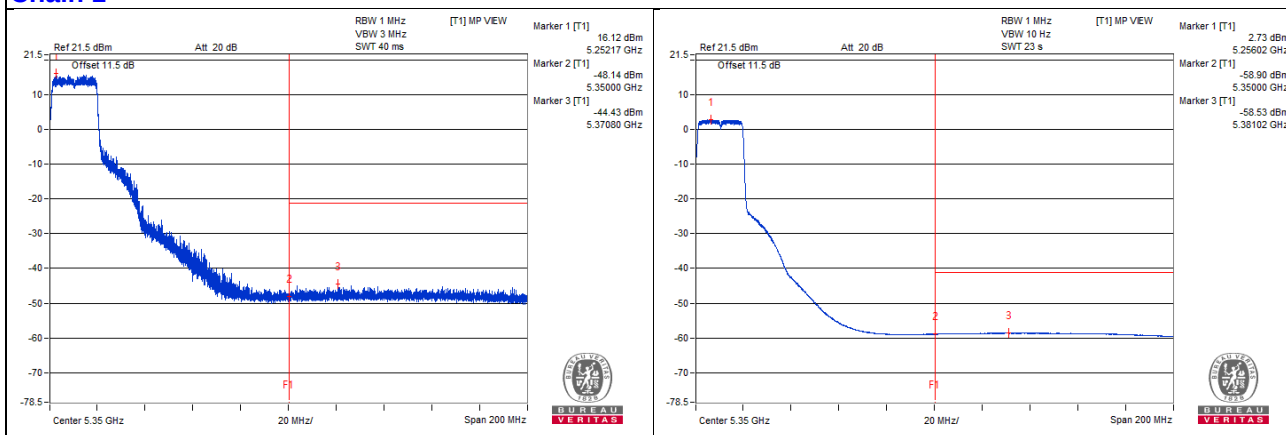

802.11ax (HE20) - Channel 60

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3542.18 PK	56.7	74	-17.3	-48.31	-47.1	6.09	-38.56
2	3545.31 AV	45.33	54	-8.67	-58.92	-59.14	6.09	-49.93
3	7067.18 PK	57.48	68.2	-10.72	-48.59	-45.65	6.09	-37.78
4	10603.12 PK	55.52	74	-18.48	-49.77	-48.08	6.09	-39.74
5	10617.18 AV	44.34	54	-9.66	-60.1	-59.95	6.09	-50.92
6	15897.75 PK	59.86	74	-14.14	-48.7	-42.4	6.09	-35.4
7	15900.62 AV	47.01	54	-6.99	-60.06	-55.69	6.09	-48.25

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0



Chain 1

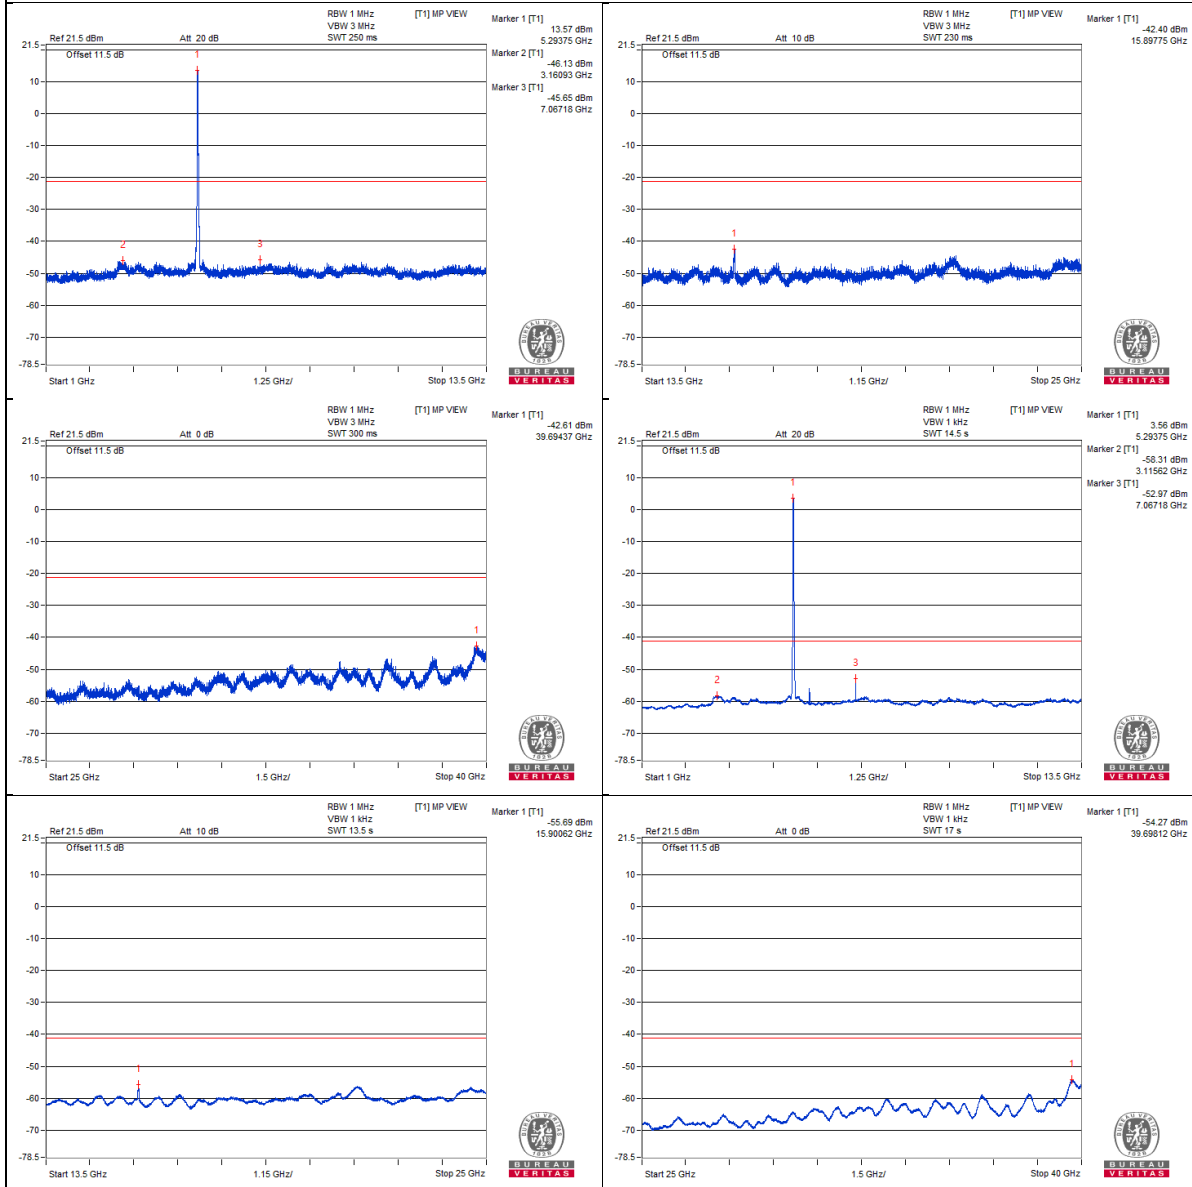

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.67 PK	68.55	74	-5.45	-36.96	-34.9	6.09	-26.71
2	5350.05 AV	48.49	54	-5.51	-56.82	-55.09	6.09	-46.77

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

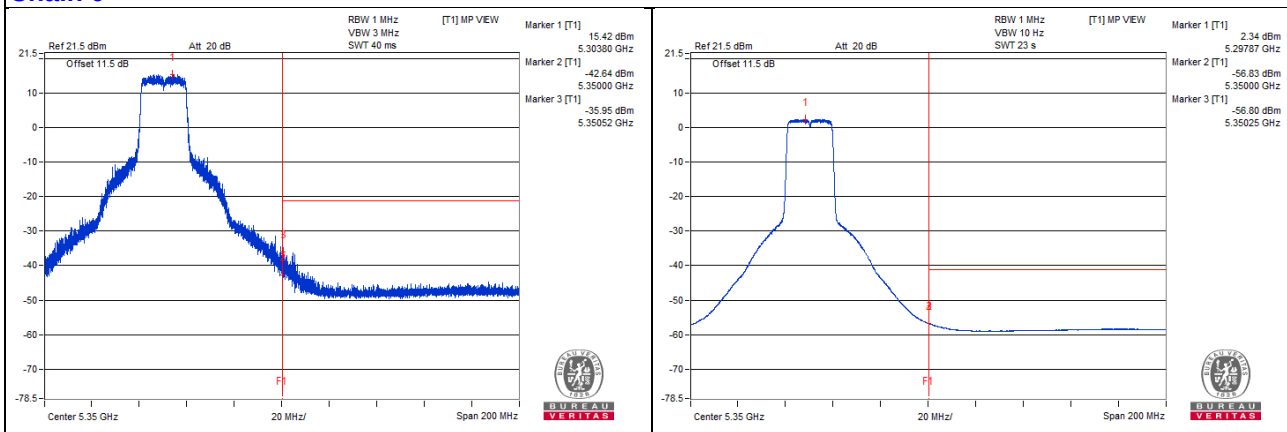

Chain 1

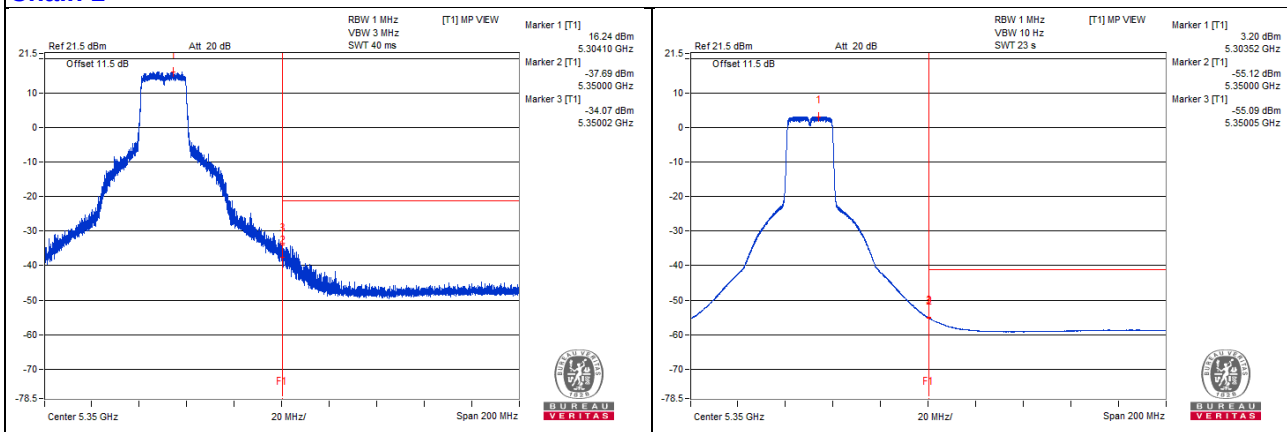

802.11ax (HE20) - Channel 64

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3554.68 PK	56.2	74	-17.8	-47.32	-49.21	6.09	-39.06
2	3550 AV	45.3	54	-8.7	-59.21	-58.91	6.09	-49.96
3	7090.62 PK	56.33	68.2	-11.87	-47.18	-49.1	6.09	-38.93
4	10625 PK	55.53	74	-18.47	-47.83	-50.13	6.09	-39.73
5	10656.25 AV	44.44	54	-9.56	-59.85	-60	6.09	-50.82
6	15959.56 PK	56.59	74	-17.41	-49.72	-46.43	6.09	-38.67
7	15958.12 AV	44.71	54	-9.29	-60.74	-58.78	6.09	-50.55

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0



Chain 1



Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350 PK	73.2	74	-0.8	-32.08	-30.41	6.09	-22.06
2	5350.02 AV	54.62	54	* 0.62	-51.53	-48.47	6.09	-40.64

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

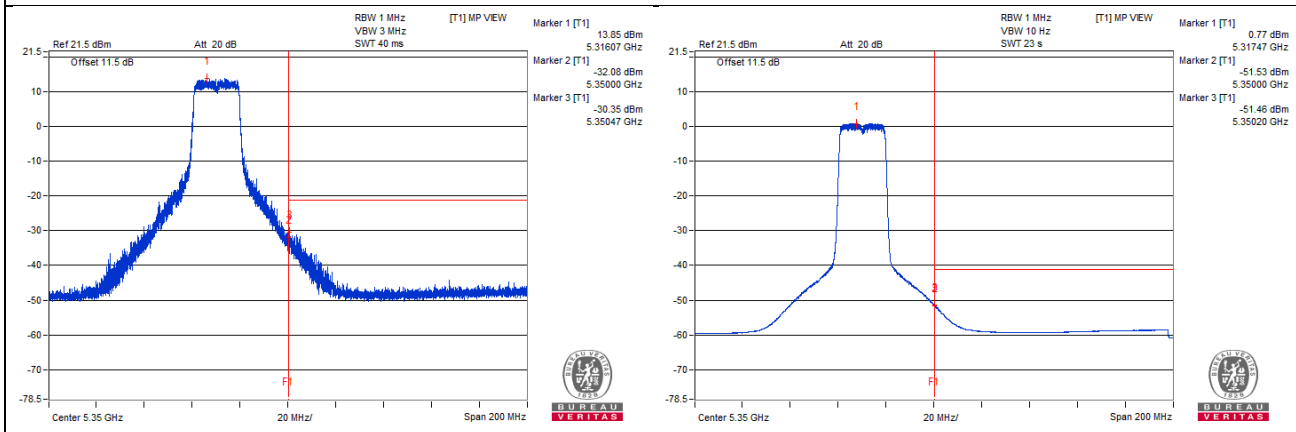

Chain 1

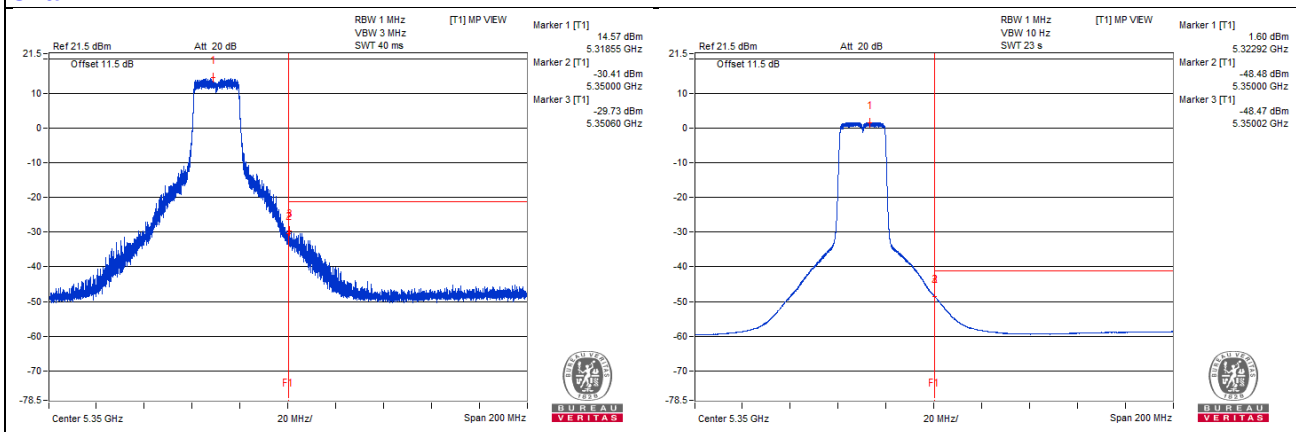

802.11ax (HE20) - Channel 100

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3681.25 PK	57.17	74	-16.83	-48.8	-48.94	7.77	-38.09
2	3648.43 AV	46.76	54	-7.24	-59.39	-59.17	7.77	-48.5
3	7337.5 PK	59.18	74	-14.82	-45.81	-48.25	7.77	-36.08
4	7332.81 AV	50.88	54	-3.12	-55.09	-55.23	7.77	-44.38
5	11007.81 PK	56.13	74	-17.87	-49.52	-50.35	7.77	-39.13
6	10981.25 AV	45.3	54	-8.7	-60.64	-60.85	7.77	-49.96
7	16505.81 PK	57.87	68.2	-10.33	-49.53	-47.13	7.77	-37.39

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

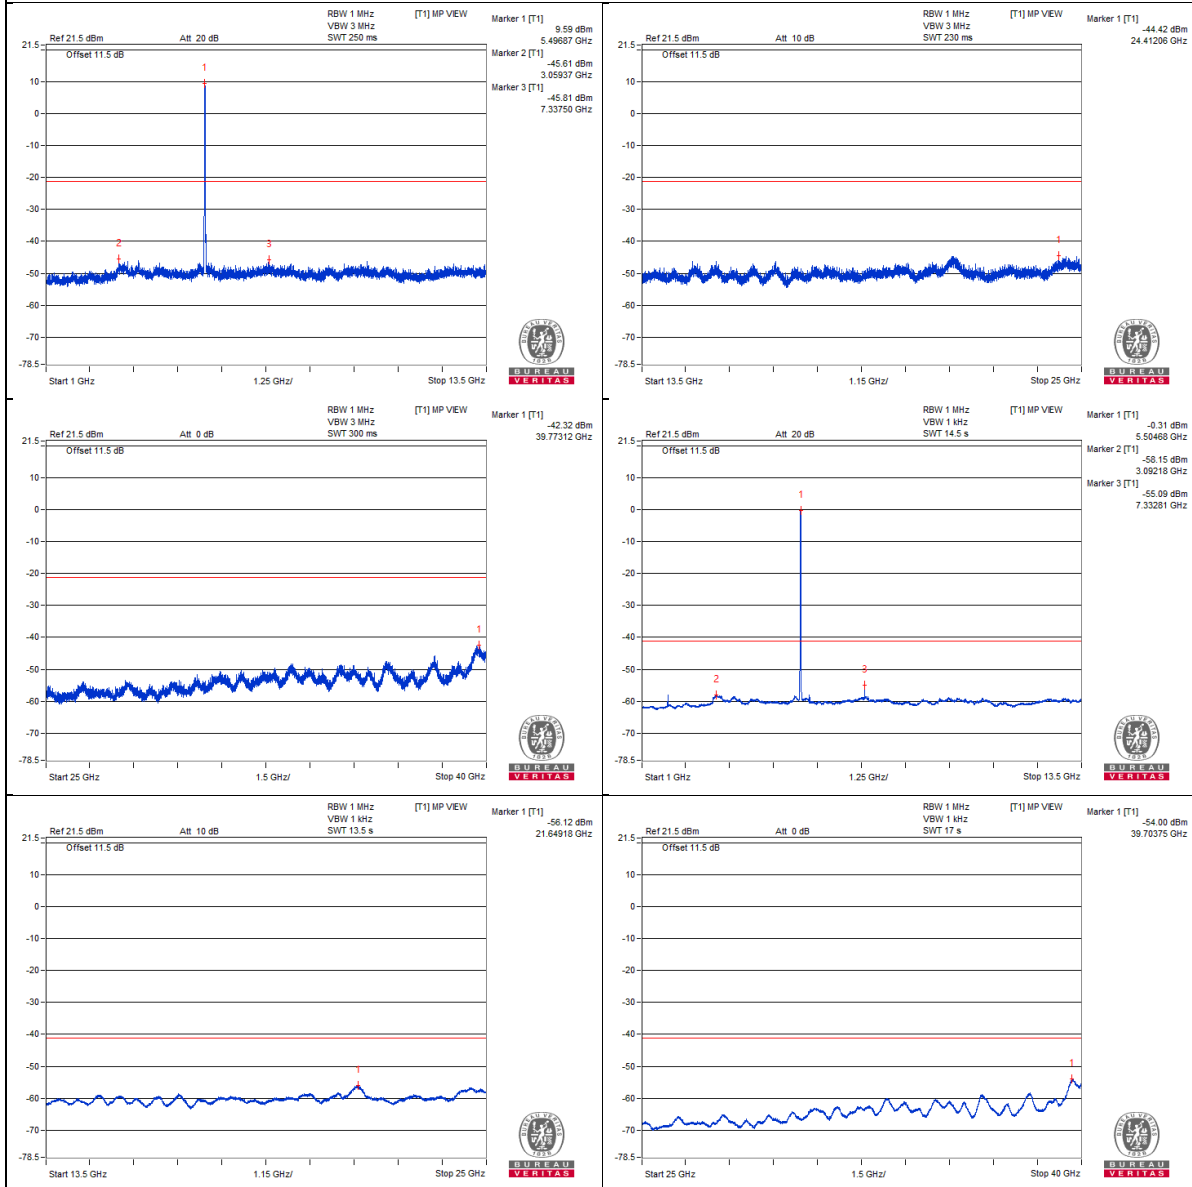

Chain 1

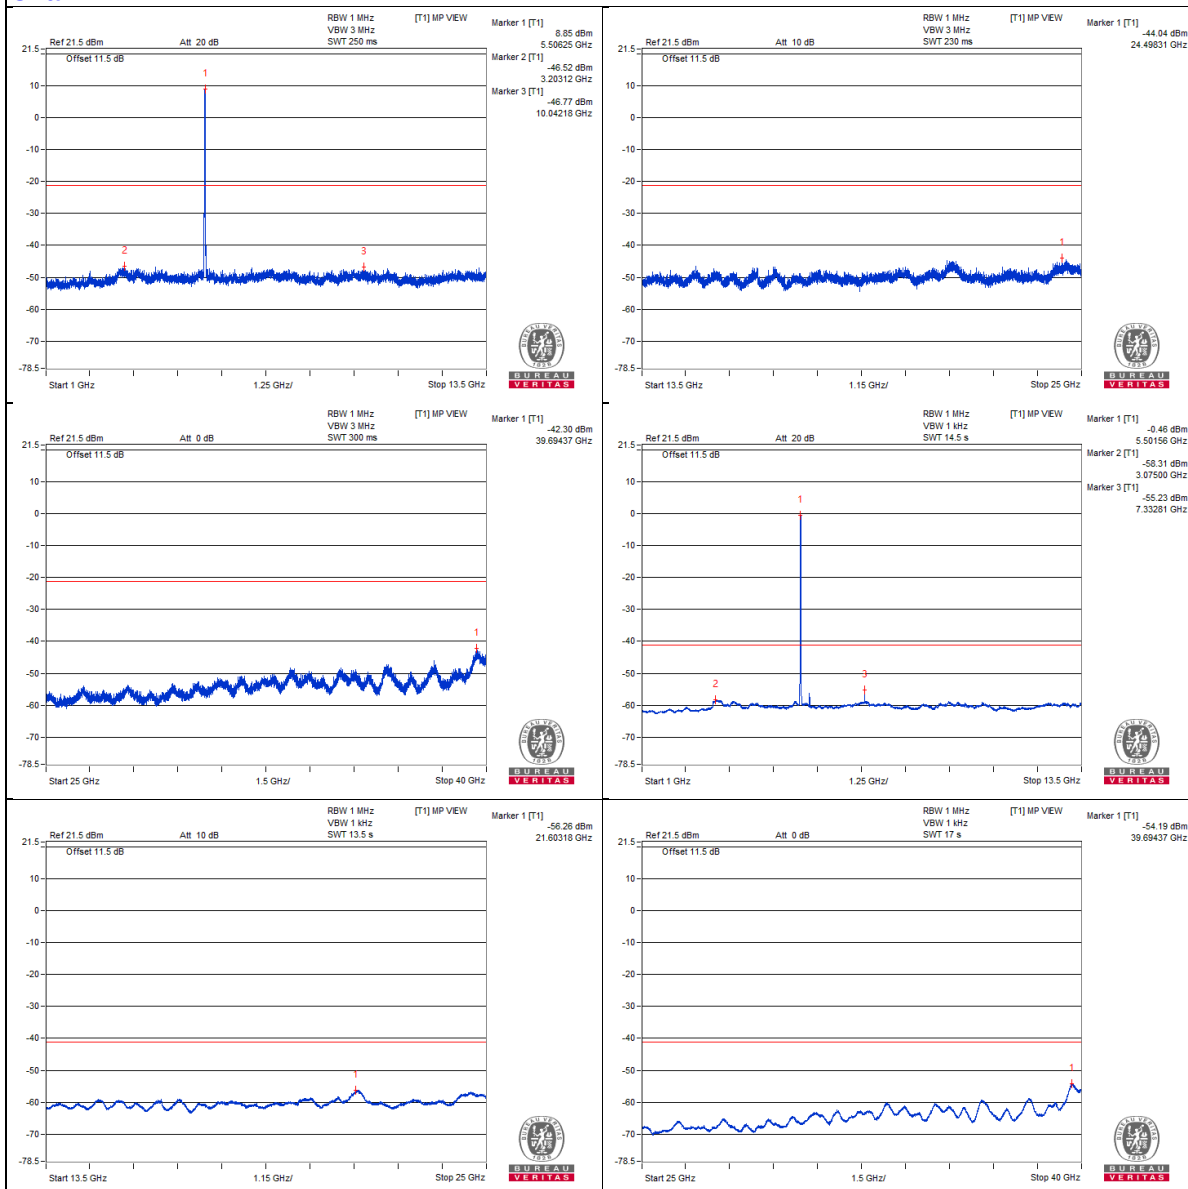

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5458.46 PK	64.53	74	-9.47	-41.6	-41.43	7.77	-30.73
2	5351.84 AV	47.69	54	-6.31	-58.34	-58.37	7.77	-47.57
3	5467.96 PK	73.01	68.2	* 4.81	-32	-34.38	7.77	-22.25


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

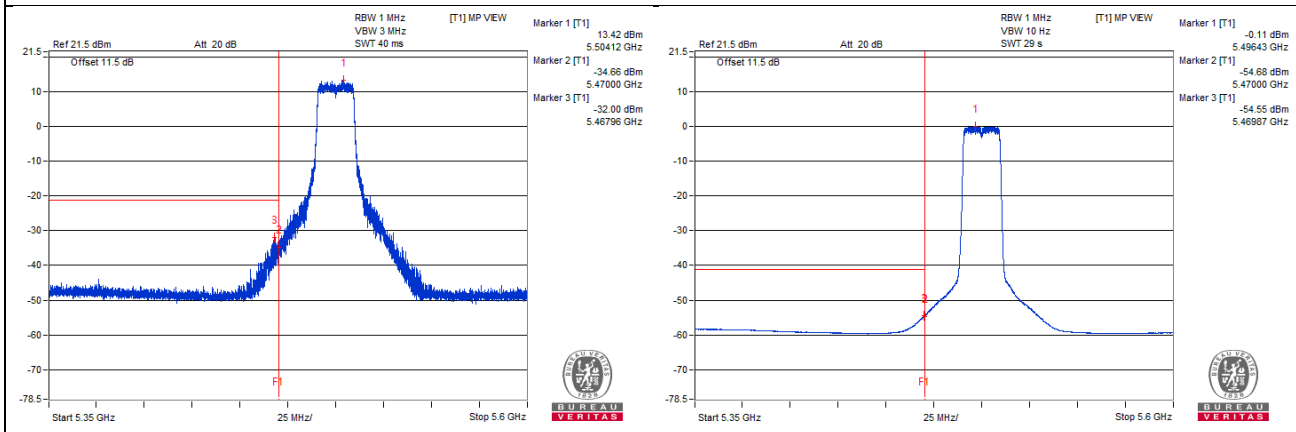

Chain 1

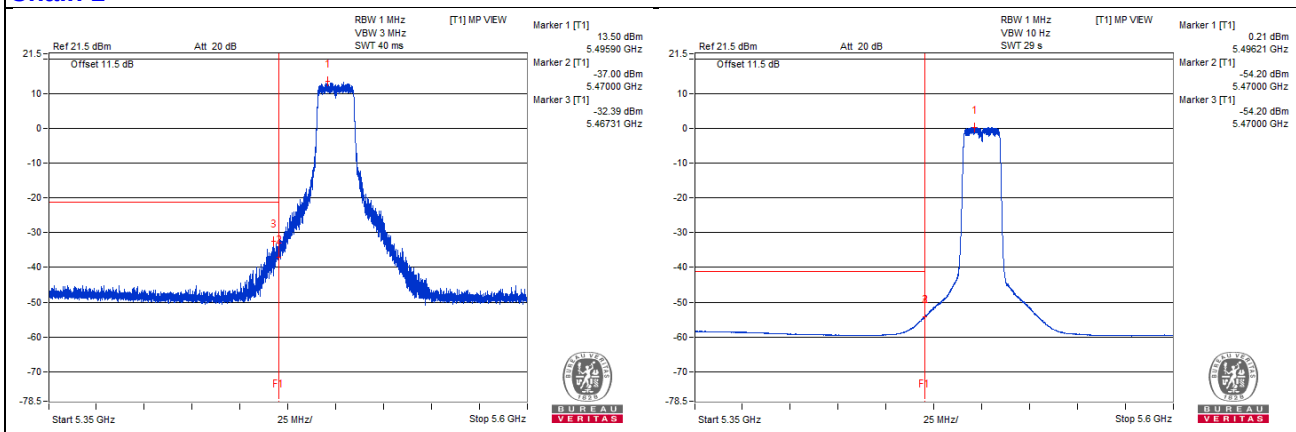

802.11ax (HE20) - Channel 116

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3704.68 PK	58.37	74	-15.63	-48.81	-46.77	7.77	-36.89
2	3735.93 AV	46.49	54	-7.51	-59.42	-59.68	7.77	-48.77
3	7440.62 PK	58.68	74	-15.32	-46.46	-48.51	7.77	-36.58
4	7440.62 AV	49.11	54	-4.89	-57.66	-56.3	7.77	-46.15
5	11159.37 PK	56.68	74	-17.32	-49.81	-48.95	7.77	-38.58
6	11179.68 AV	45.21	54	-8.79	-60.93	-60.74	7.77	-50.05
7	16737.25 PK	65.49	68.2	-2.71	-40.73	-40.38	7.77	-29.77

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0



Chain 1



Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5436.4 PK	60.81	74	-13.19	-44.02	-46.9	7.77	-34.45
2	5436.78 AV	47.51	54	-6.49	-58.44	-58.62	7.77	-47.75
3	5463.5 PK	59.56	68.2	-8.64	-45.29	-48.12	7.77	-35.7

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

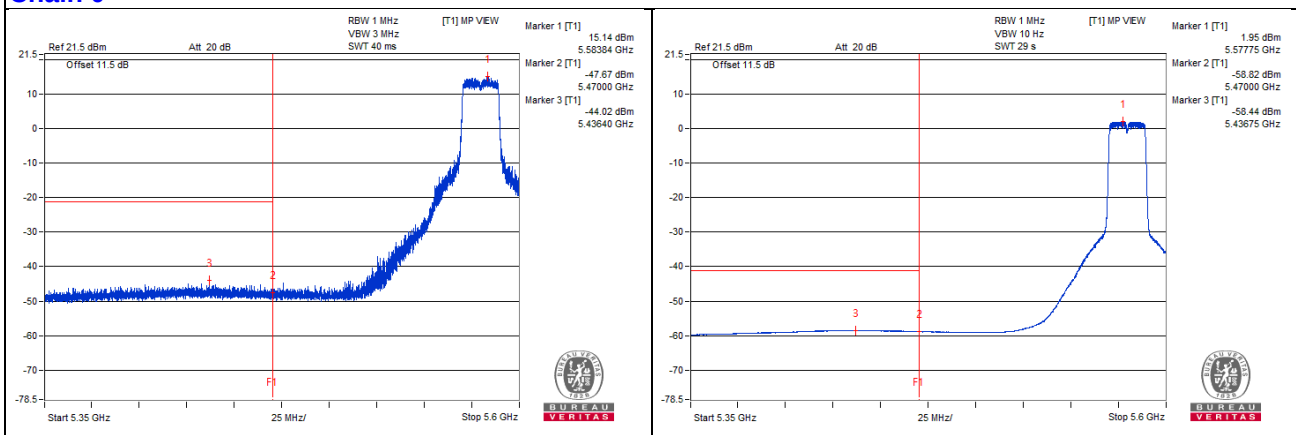

Chain 1

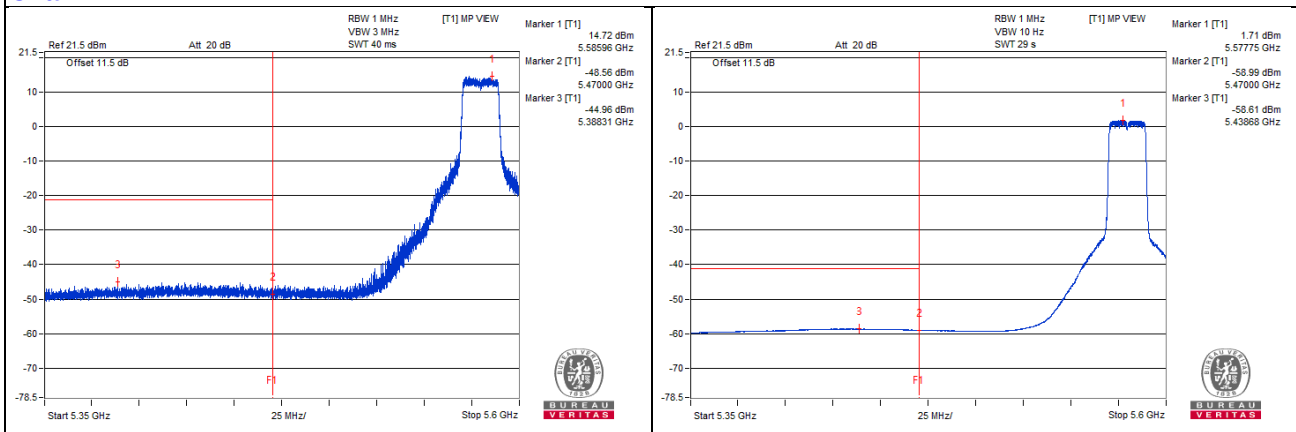

802.11ax (HE20) - Channel 140

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3781.25 PK	56.92	74	-17.08	-48.96	-49.28	7.77	-38.34
2	3781.25 AV	46.24	54	-7.76	-59.66	-59.94	7.77	-49.02
3	7584.37 PK	57.19	74	-16.81	-50.53	-47.64	7.77	-38.07
4	7600 AV	46.73	54	-7.27	-59.24	-59.38	7.77	-48.53
5	11396.87 PK	56	74	-18	-49.86	-50.22	7.77	-39.26
6	11387.5 AV	45.23	54	-8.77	-60.66	-60.97	7.77	-50.03
7	17095.18 PK	62.46	68.2	-5.74	-46.86	-41.73	7.77	-32.8

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

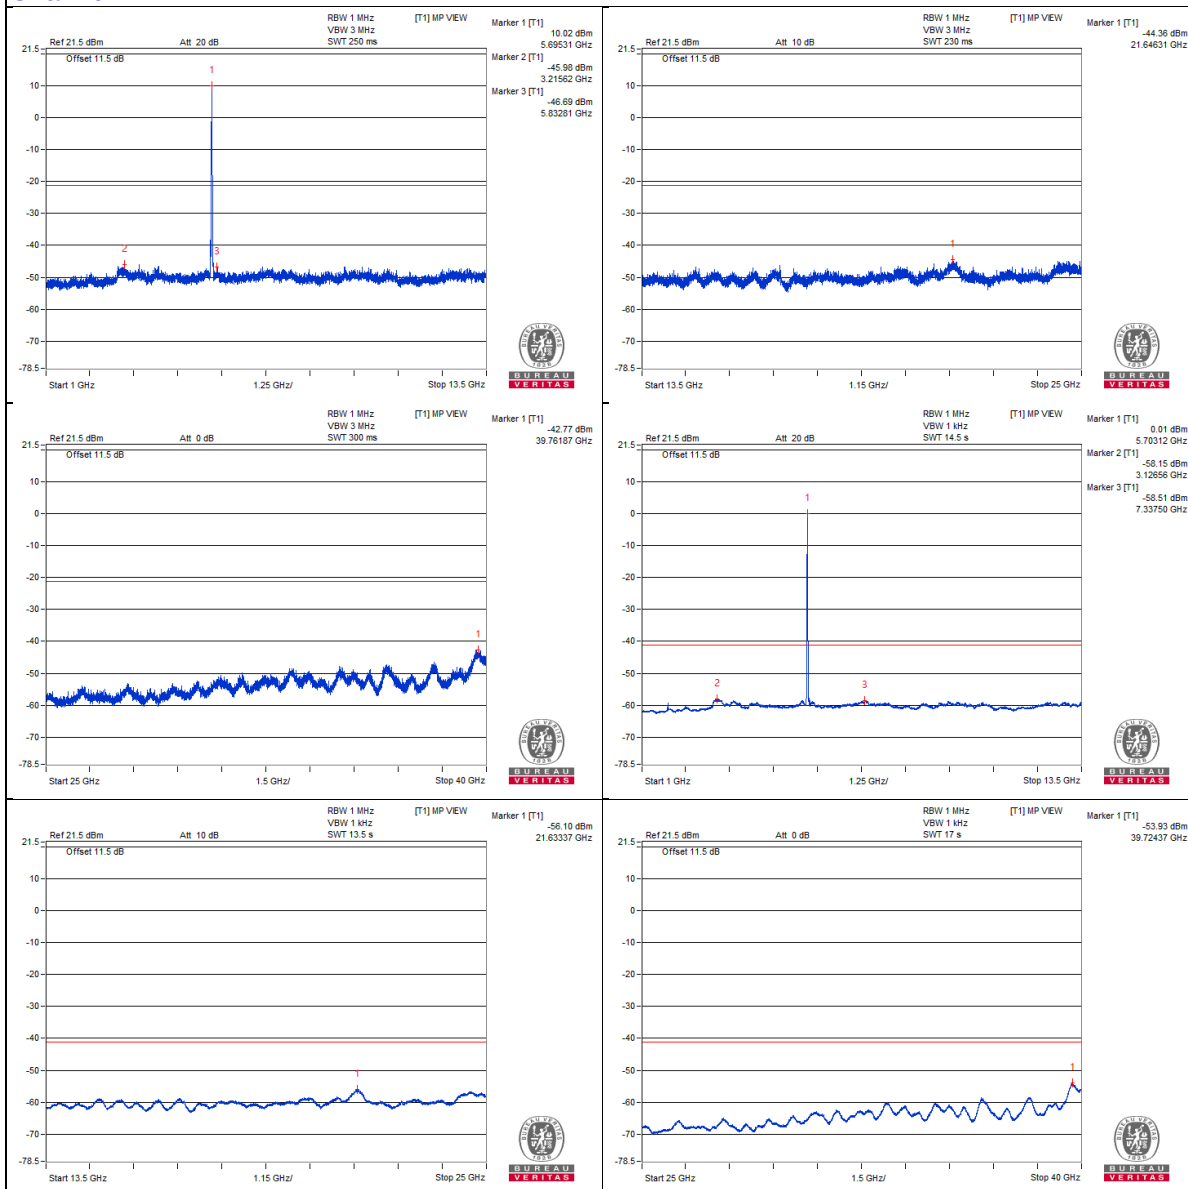

Chain 1

