

Appendix A. Plots of System Verification

The plots for system verification are shown as follows.

Plots of System Verification

Measurement Report
S01 System Check_H2450_240520
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole,	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	2450.000, 0	6.71	1.77	37.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H06T27N8 , 2024-May-20	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 96.0	35.0 x 35.0 x 30.0
Grid Steps [mm]	10.0 x 12.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-20	2024-05-20
psSAR1g [W/kg]	2.43	2.48
psSAR10g [W/kg]	1.13	1.15
Power Drift [dB]	0.01	0.03

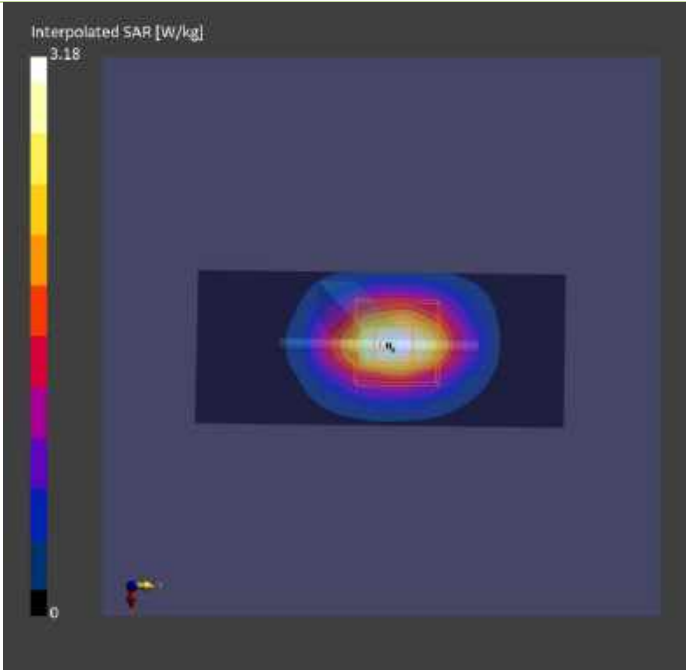

Plots of System Verification

Measurement Report
S02 System Check_H5250_240520
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	5250.000, 0	5.16	4.54	35.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8 , 2024-May-20	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-20	2024-05-20
psSAR1g [W/kg]	3.63	3.91
psSAR10g [W/kg]	1.06	1.12
Power Drift [dB]	0.00	0.02

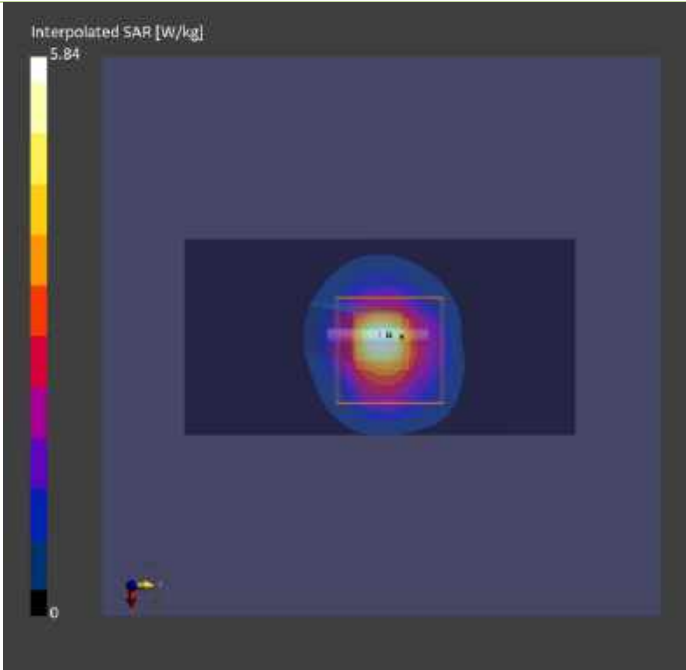

Plots of System Verification

Measurement Report
S03 System Check_H5600_240520
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	5600.000, 0	4.49	4.92	34.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8 , 2024-May-20	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-20	2024-05-20
psSAR1g [W/kg]	4.03	4.32
psSAR10g [W/kg]	1.18	1.24
Power Drift [dB]	-0.02	-0.01

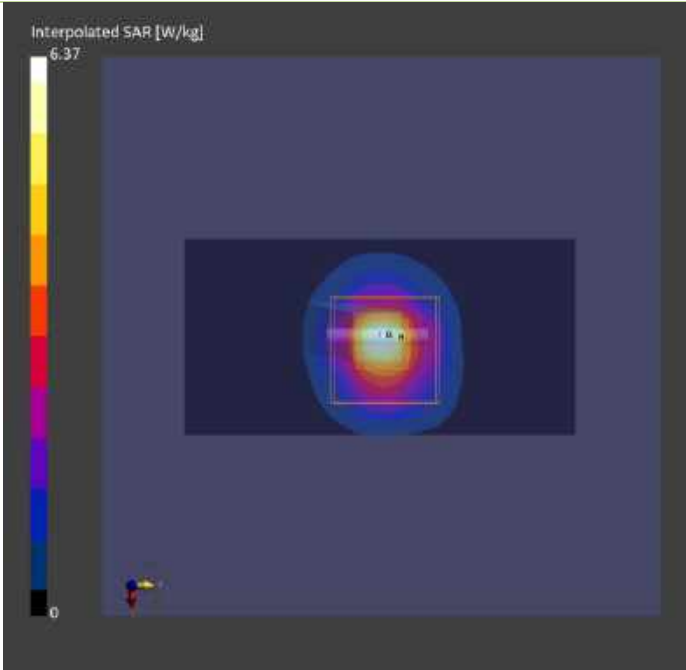

Plots of System Verification

Measurement Report
S04 System Check_H5800_240521
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	5800.000, 0	4.31	5.09	36.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8 , 2024-May-21	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-21	2024-05-21
psSAR1g [W/kg]	3.43	3.97
psSAR10g [W/kg]	1.07	1.15
Power Drift [dB]	0.01	0.02

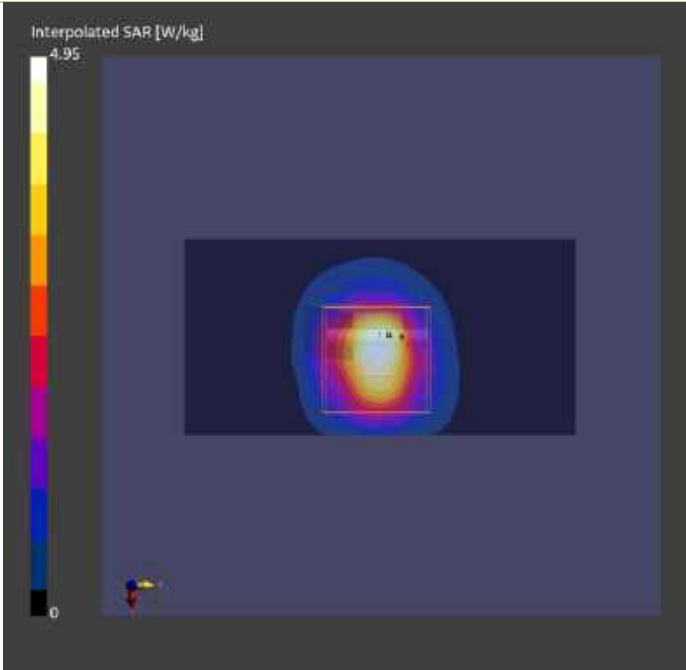

Plots of System Verification

Measurement Report
S05 System Check_H5800_240521
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	5800.000, 0	4.31	5.09	36.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8 , 2024-May-21	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-21	2024-05-21
psSAR1g [W/kg]	3.43	3.97
psSAR10g [W/kg]	1.07	1.15
Power Drift [dB]	0.01	0.02

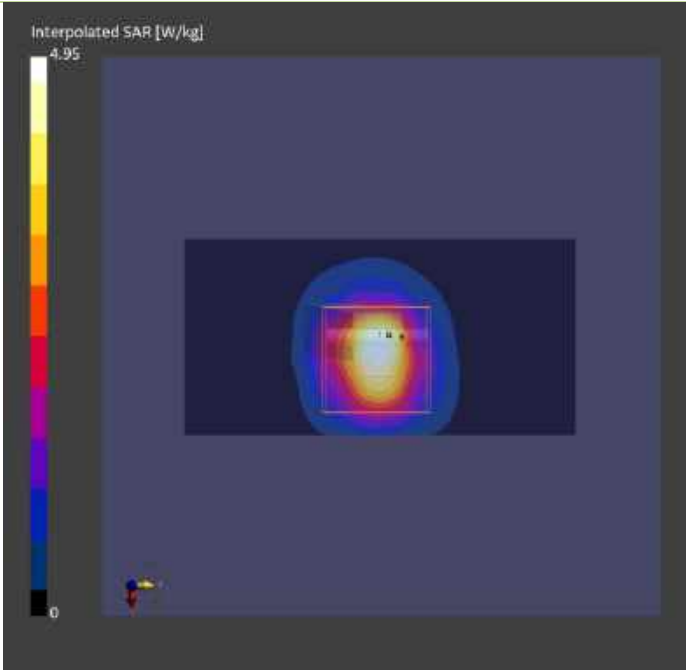

Plots of System Verification

Measurement Report
S06 System Check_H2450_240515
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat				2450.0	6.71	1.86	39.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H06T27N8 , 2024-May-15	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 96.0	35.0 x 35.0 x 30.0
Grid Steps [mm]	10.0 x 12.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-15	2024-05-15
psSAR1g [W/kg]	2.54	2.69
psSAR10g [W/kg]	1.22	1.24
Power Drift [dB]	0.03	-0.05

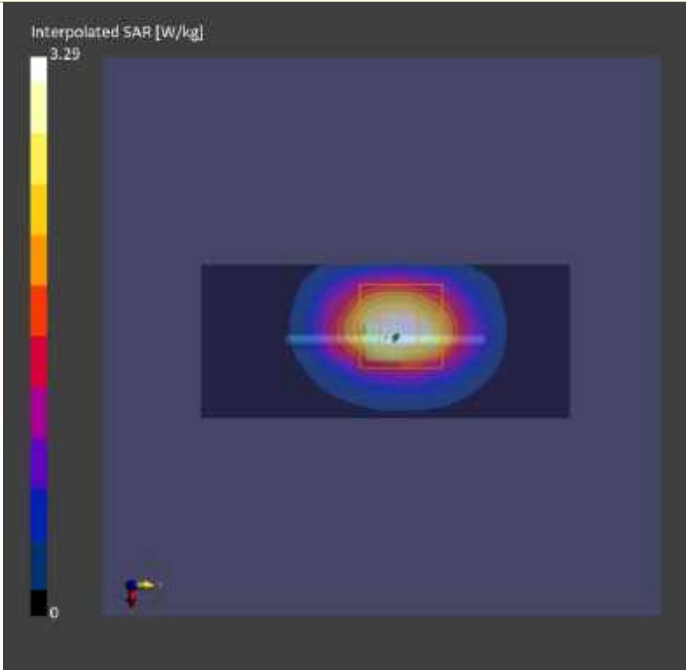

Plots of System Verification

Measurement Report
S07 System Check_H2450_240517
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat				2450.0	6.71	1.82	38.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H06T27N8 , 2024-May-17	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 96.0	35.0 x 35.0 x 30.0
Grid Steps [mm]	10.0 x 12.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-17	2024-05-17
psSAR1g [W/kg]	2.51	2.68
psSAR10g [W/kg]	1.20	1.19
Power Drift [dB]	0.03	-0.05

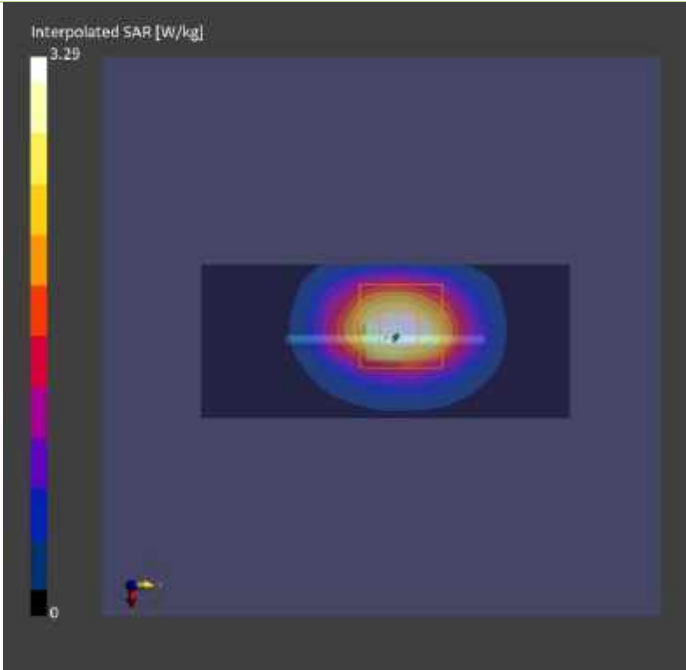

Plots of System Verification

Measurement Report
S08 System Check_H5250_240517
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	5250.000, 0	5.16	4.57	37.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8 , 2024-May-17	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-17	2024-05-17
psSAR1g [W/kg]	3.60	3.93
psSAR10g [W/kg]	1.02	1.14
Power Drift [dB]	0.00	0.02

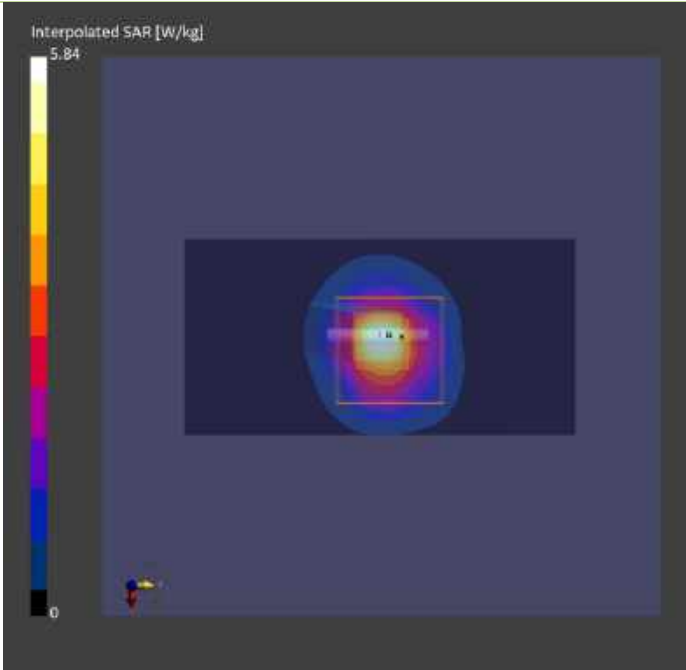

Plots of System Verification

Measurement Report
S09 System Check_H5600_240517
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	5600.000, 0	4.49	4.97	37.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8 , 2024-May-17	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-17	2024-05-17
psSAR1g [W/kg]	4.00	4.29
psSAR10g [W/kg]	1.15	1.21
Power Drift [dB]	-0.02	-0.01

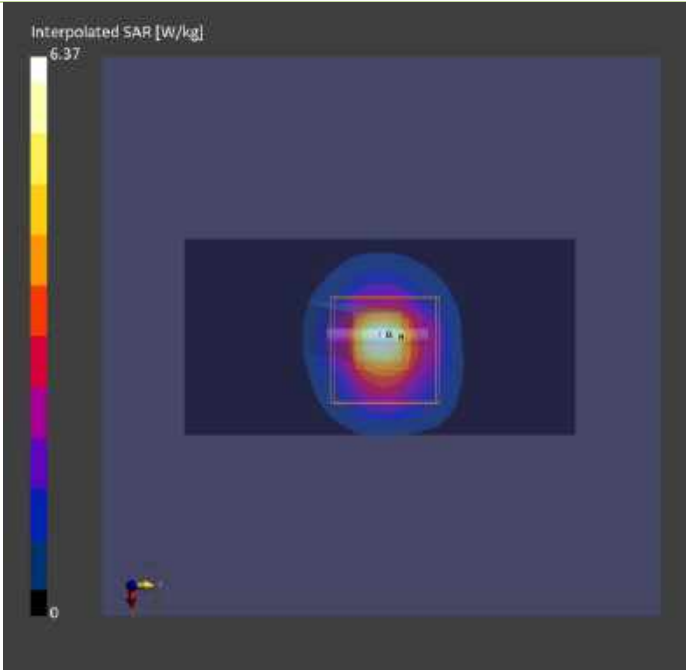

Plots of System Verification

Measurement Report
S10 System Check_H5800_240522
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	5800.000, 0	4.31	5.22	36.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8 , 2024-May-22	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-22	2024-05-22
psSAR1g [W/kg]	3.75	4.00
psSAR10g [W/kg]	1.08	1.15
Power Drift [dB]	0.01	-0.01

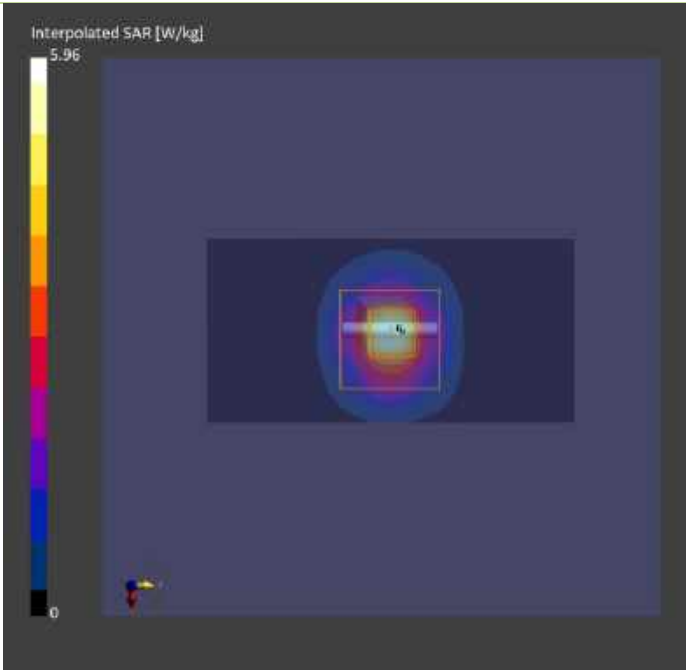

Plots of System Verification

Measurement Report
S11 System Check_H5800_240522
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	5800.000, 0	4.31	5.22	36.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8 , 2024-May-22	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-22	2024-05-22
psSAR1g [W/kg]	3.75	4.00
psSAR10g [W/kg]	1.08	1.15
Power Drift [dB]	0.01	-0.01

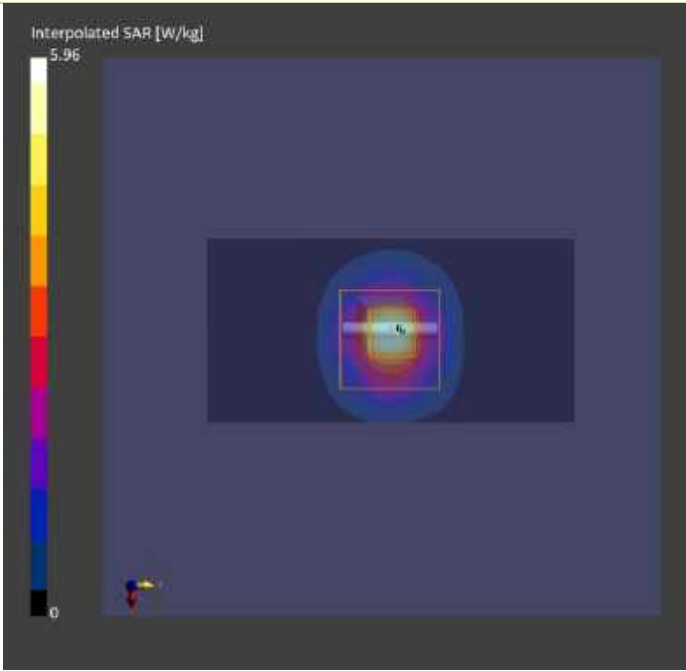

Plots of System Verification

Measurement Report
S12 System Check_H2450_240515
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat				2450.0	6.71	1.86	39.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H06T27N8 , 2024-May-15	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 96.0	35.0 x 35.0 x 30.0
Grid Steps [mm]	10.0 x 12.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-15	2024-05-15
psSAR1g [W/kg]	2.54	2.69
psSAR10g [W/kg]	1.22	1.24
Power Drift [dB]	0.03	-0.05

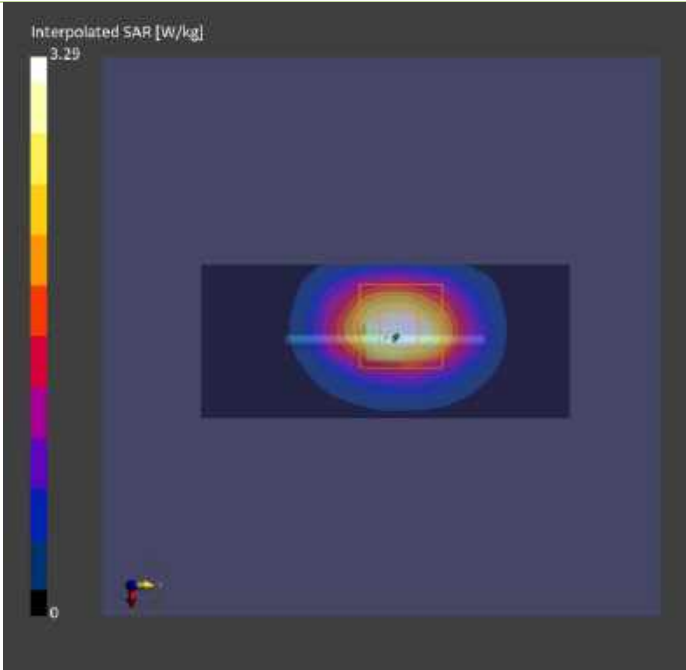

Plots of System Verification

Measurement Report

S13system Check_H6.5GHz_240515

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	50.0 x 10.0 x 8.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL				6500.000	4.99	6.15	35.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8 , 2024-May-15	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-15	2024-05-15
psSAR1g [W/kg]	26.4	28.4
psSAR10g [W/kg]	4.98	5.28
psAPD (1.0cm2, sq) [W/m2]		284
psAPD (4.0cm2, sq) [W/m2]		131
Power Drift [dB]	-0.01	-0.04

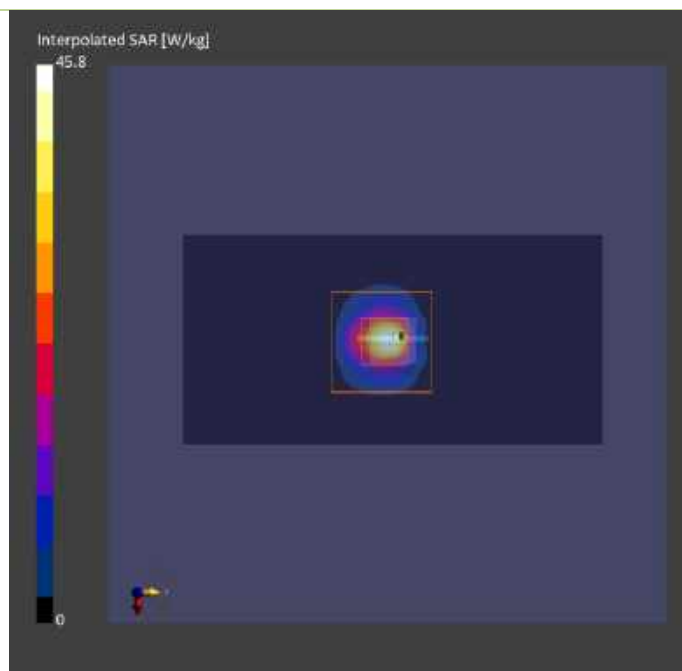

Plots of System Verification

Measurement Report
S14 System Check_H6500_240522
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device	10.0 x 10.0 x 300.0		Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat			CW, 0--	6500.000 0	4.99	6.08	35.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8 , 2024-May-22	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-22	2024-05-22
psSAR1g [W/kg]	25.5	29.5
psSAR10g [W/kg]	5.05	5.39
psAPD (1.0cm2, sq) [W/m2]		295
psAPD (4.0cm2, sq) [W/m2]		133
Power Drift [dB]	-0.02	0.13

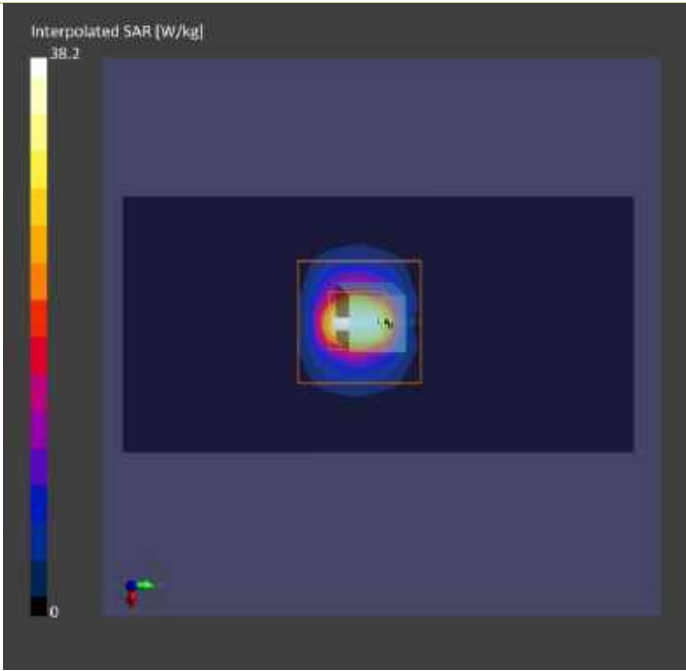

Plots of System Verification

Measurement Report

S13_PD_System Check_10 GHz_2024.05.20

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
SPEAG, 5G Verification Source 10 GHz	100.0 x 100.0 x 170.0	SN: 1016	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	FRONT, 10.00	Validation band	CW, 0--	10000.0, 10000	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1029	--Air--	EUmmWV4 - SN9615_F1-55GHz, 2023-07-10	DAE4 Sn1431, 2023-08-24

Scan Setup

	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.125 x 0.125
Sensor Surface [mm]	10.0

Measurement Results

	5G Scan
Date	2024-05-20
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	53.7
psPDtot+ [W/m ²]	53.9
psPDmod+ [W/m ²]	54.1
E _{max} [V/m]	149
Power Drift [dB]	-0.04

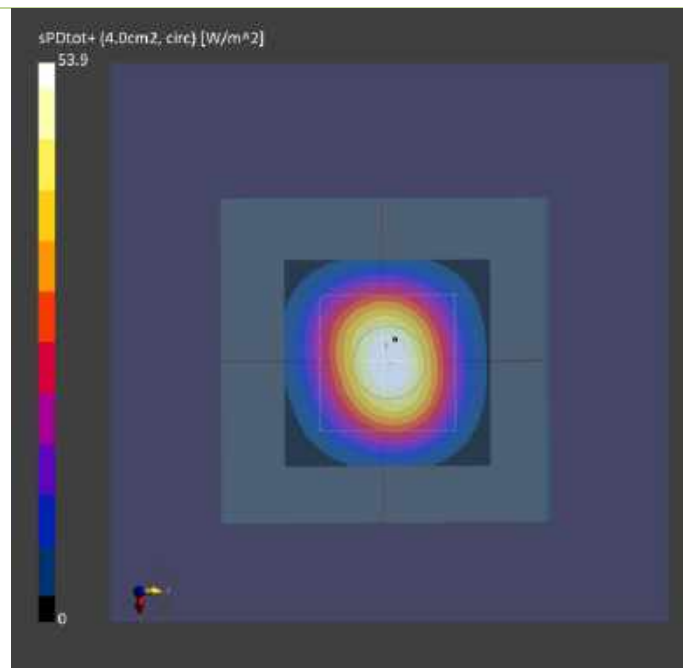

Plots of System Verification

Measurement Report S14 PD_System Check_10 GHz_2024.05.20 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
SPEAG, 5G Verification Source 10 GHz	100.0 x 100.0 x 170.0	SN: 1016	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	FRONT, 10.00	Validation band	CW, 0--	10000.0, 10000	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1029	--Air--	EUmmWV4 - SN9615_F1-55GHz, 2023-07-10	DAE4 Sn1431, 2023-08-24

Scan Setup

	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.125 x 0.125
Sensor Surface [mm]	10.0

Measurement Results

	5G Scan
Date	2024-05-20
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	53.7
psPDtot+ [W/m ²]	53.9
psPDmod+ [W/m ²]	54.1
E _{max} [V/m]	149
Power Drift [dB]	-0.04

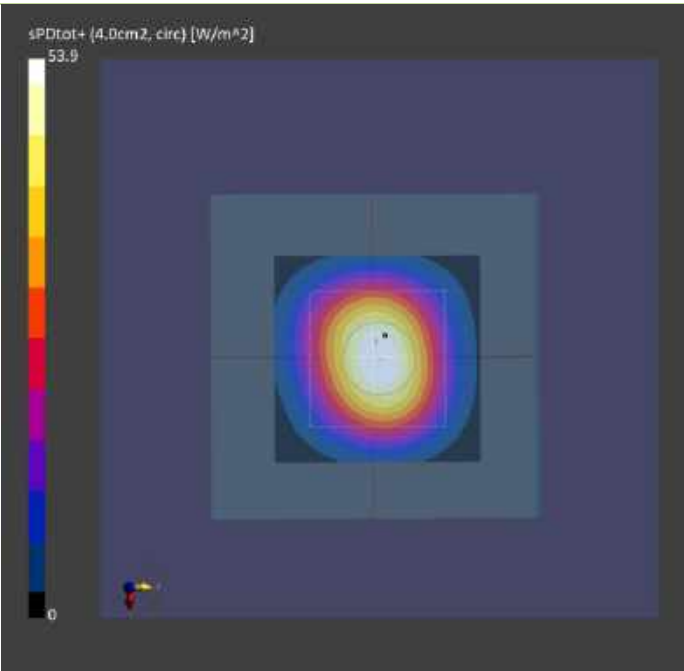

Appendix B. Plots of Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination are shown as follows.

Plots of Measurement

Measurement Report

P01 WLAN2.4G_802.11b_Front Face_8mm_Ch6_Ant Type_PIFA_Ant 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BWIN-WTW-P24030722,	240.0 x 48.0 x 73.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Front Face_, 8.00	WLAN 2.4GHz	WLAN, 10012-CAB	2437.000, 6	6.71	1.77	37.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H06T27N8 , 2024-May-20	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 288.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-20	2024-05-20
psSAR1g [W/kg]	0.681	0.677
psSAR10g [W/kg]	0.349	0.349
Power Drift [dB]	-0.13	-0.07
M2/M1 [%]		49.4
Dist 3dB Peak [mm]		11.5

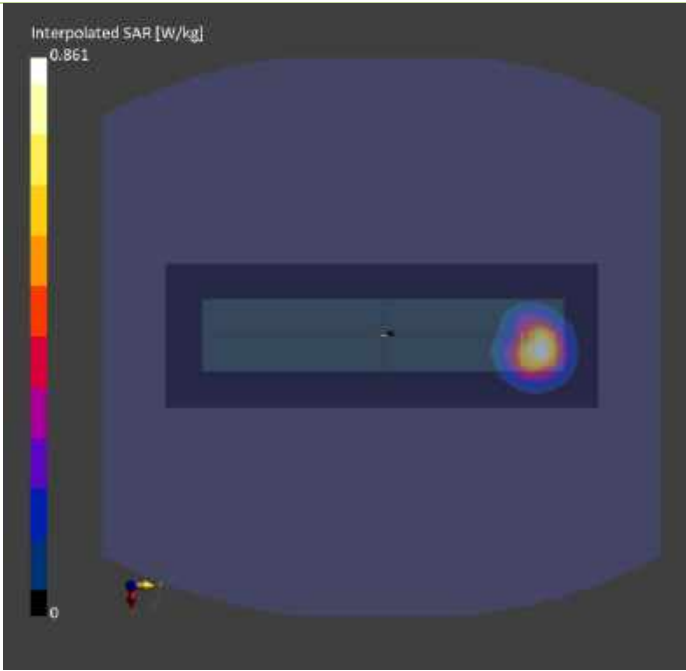

Plots of Measurement

Measurement Report

P02 WLAN5.3G_802.11a_Front Face_8mm_Ch56_Ant Type_PIFA_Ant 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BWIN-WTW-P24030722,	240.0 x 48.0 x 73.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Front Face, 8.00	WLAN 5GHz	WLAN, 10062-CAE	5280.000, 56	5.16	4.57	35.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8 , 2024-May-20	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 280.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-20	2024-05-20
psSAR1g [W/kg]	0.287	0.340
psSAR10g [W/kg]	0.094	0.097
Power Drift [dB]	0.14	0.18
M2/M1 [%]		60.5
Dist 3dB Peak [mm]		6.4

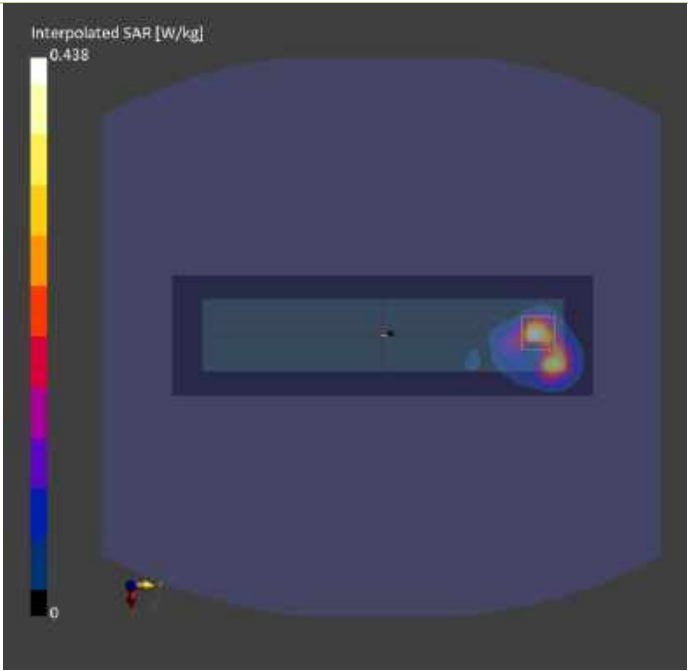

Plots of Measurement

Measurement Report

P03 WLAN5.6G_802.11a_Front Face_8mm_Ch116_Ant Type_PIFA_Ant 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BWIN-WTW-P24030722,	240.0 x 48.0 x 73.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Front Face, 8.00	WLAN 5GHz	WLAN, 10062-CAE	5580.000, 116	4.49	4.89	34.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8 , 2024-May-20	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 280.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-20	2024-05-20
psSAR1g [W/kg]	0.369	0.449
psSAR10g [W/kg]	0.122	0.133
Power Drift [dB]	0.16	0.11
M2/M1 [%]		58.6
Dist 3dB Peak [mm]		6.4

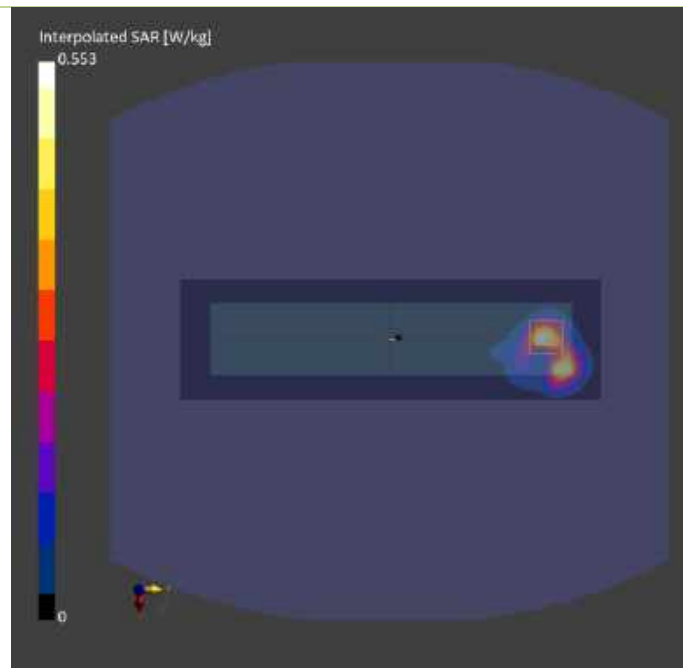

Plots of Measurement

Measurement Report
P04 WLAN5.8G_802.11a_Front Face_8mm_Ch149_Ant Type_PIFA_Ant 1
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BWIN-WTW-P24030722,	240.0 x 48.0 x 73.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Front Face, 8.00	WLAN 5GHz	WLAN, 10062-CAE	5745.000, 149	4.31	5.15	36.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8 , 2024-May-21	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 280.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-21	2024-05-21
psSAR1g [W/kg]	0.584	0.693
psSAR10g [W/kg]	0.185	0.207
Power Drift [dB]	-0.10	0.14
M2/M1 [%]		55.0
Dist 3dB Peak [mm]		6.9

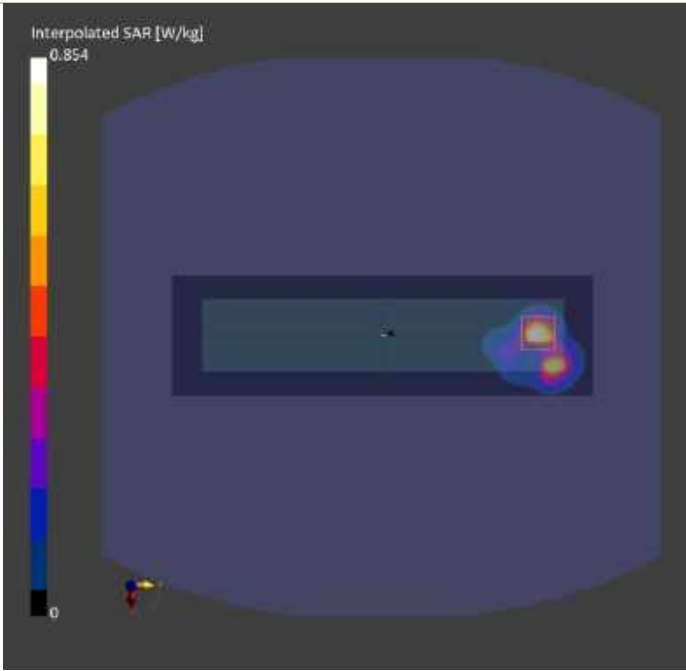

Plots of Measurement

Measurement Report
P05 WLAN5.9G_802.11ac VHT80_Front Face_8mm_Ch171_Ant Type_PIFA_Ant 1
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BWIN-WTW-P24030722,	240.0 x 48.0 x 73.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Front Face, 8.00	WLAN 5GHz	WLAN, 10544-AAD	5855.000, 171	4.31	5.06	35.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8 , 2024-May-21	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 280.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-21	2024-05-21
psSAR1g [W/kg]	0.477	0.540
psSAR10g [W/kg]	0.140	0.148
Power Drift [dB]	0.15	0.11
M2/M1 [%]		59.6
Dist 3dB Peak [mm]		5.1

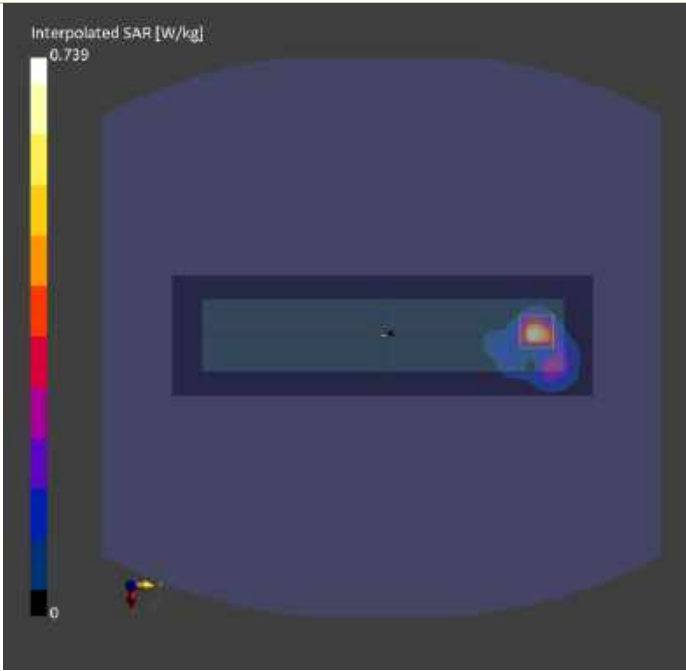

Plots of Measurement

Measurement Report
P06_BT_BR_Front Face_8mm_Ch0_Ant Type_PIFA_Ant 0
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BWIN-WTW-P24030722,	240.0 x 48.0 x 73.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Front Face, 8.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2402.000, 0	6.71	1.82	39.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H06T27N8 , 2024-May-15	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 288.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-15	2024-05-15
psSAR1g [W/kg]	0.418	0.414
psSAR10g [W/kg]	0.211	0.207
Power Drift [dB]	-0.10	-0.18
M2/M1 [%]		49.3
Dist 3dB Peak [mm]		15.0

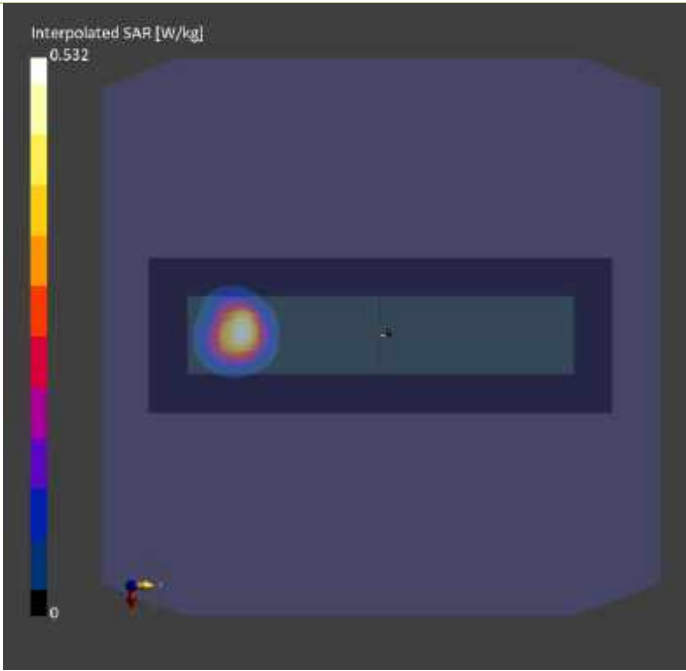

Plots of Measurement

Measurement Report

P07 WLAN2.4G_802.11b_Front Face_8mm_Ch6_Ant Type_Monopole_Ant 0+1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BWIN-WTW-P24030722,	240.0 x 48.0 x 73.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Front Face, 8.00	WLAN 2.4GHz	WLAN, 10012-CAB	2437.000, 6	6.71	1.81	38.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H06T27N8 , 2024-May-17	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 288.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-17	2024-05-17
psSAR1g [W/kg]	0.520	0.541
psSAR10g [W/kg]	0.268	0.268
Power Drift [dB]	0.16	-0.12
M2/M1 [%]		47.5
Dist 3dB Peak [mm]		8.5

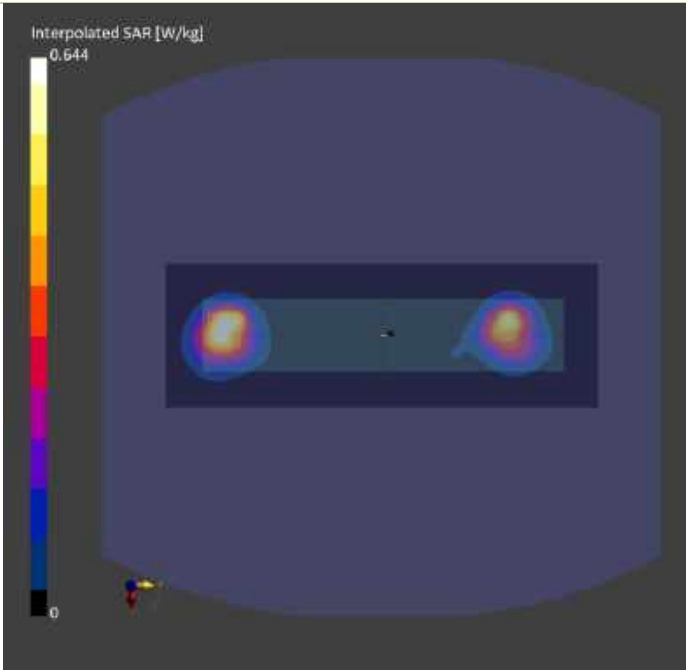

Plots of Measurement

Measurement Report

P08 WLAN5.3G_802.11a_Front Face_8mm_Ch56_Ant Type_Monopole_Ant 0+1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BWIN-WTW-P24030722,	240.0 x 48.0 x 73.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Front Face, 8.00	WLAN 5GHz	WLAN, 10062-CAE	5280.000, 56	5.16	4.60	37.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8 , 2024-May-17	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 280.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-17	2024-05-17
psSAR1g [W/kg]	0.626	0.670
psSAR10g [W/kg]	0.217	0.226
Power Drift [dB]	0.16	0.01
M2/M1 [%]		61.8
Dist 3dB Peak [mm]		7.9

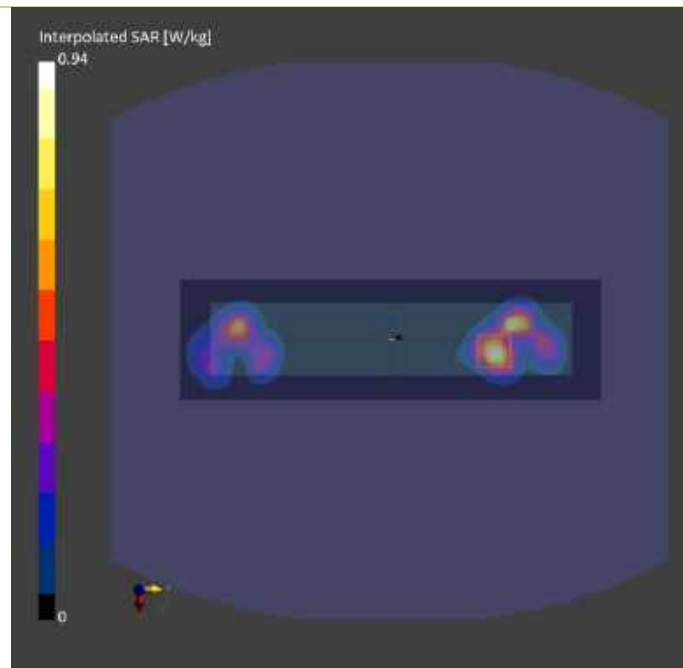

Plots of Measurement

Measurement Report

P09 WLAN5.6G_802.11a_Front Face_8mm_Ch116_Ant Type_Monopole_Ant 0+1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BWIN-WTW-P24030722,	240.0 x 48.0 x 73.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Front Face, 8.00	WLAN 5GHz	WLAN, 10062-CAE	5580.000, 116	4.49	4.94	37.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8 , 2024-May-17	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 280.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-17	2024-05-17
psSAR1g [W/kg]	0.694	0.776
psSAR10g [W/kg]	0.221	0.236
Power Drift [dB]	-0.18	-0.11
M2/M1 [%]		60.3
Dist 3dB Peak [mm]		7.6

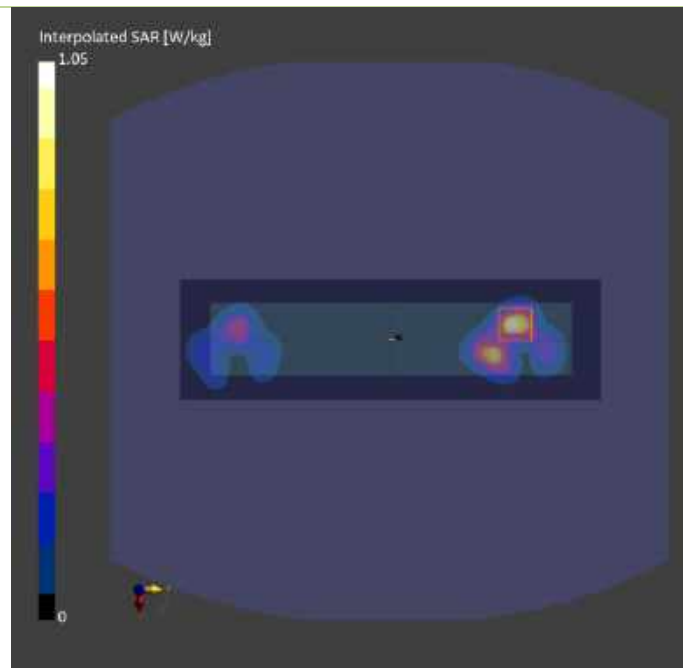

Plots of Measurement

Measurement Report
P10 WLAN5.8G_802.11a_Front Face_8mm_Ch149_Ant Type_Monopole_Ant 0+1
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BWIN-WTW-P24030722,	240.0 x 48.0 x 73.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Front Face, 8.00	WLAN 5GHz	WLAN, 10062-CAE	5745.000, 149	4.31	5.16	36.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8 , 2024-May-22	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 280.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-22	2024-05-22
psSAR1g [W/kg]	0.616	0.696
psSAR10g [W/kg]	0.211	0.224
Power Drift [dB]	0.12	-0.17
M2/M1 [%]		58.3
Dist 3dB Peak [mm]		7.9

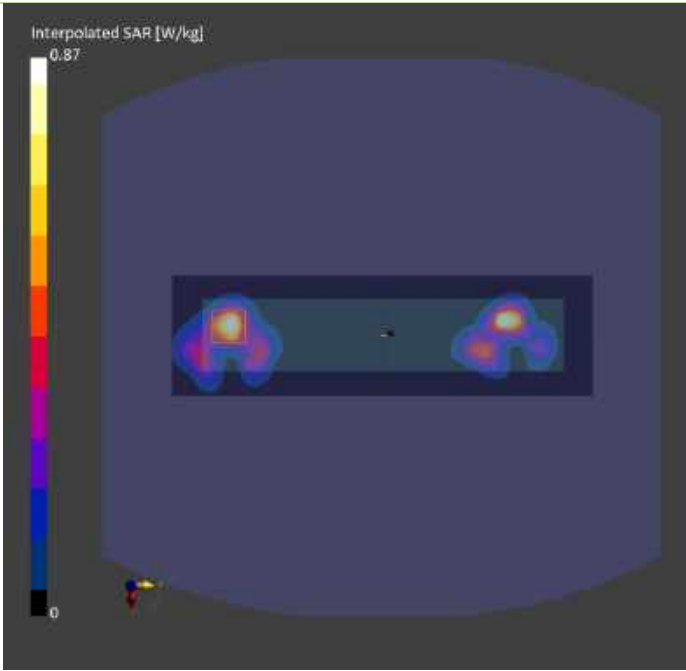

Plots of Measurement

Measurement Report

P11 WLAN5.9G_802.11ac VHT80_Front Face_8mm_Ch171_Ant Type_Monopole_Ant 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BWIN-WTW-P24030722,	240.0 x 48.0 x 73.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Front Face, 8.00	WLAN 5GHz	WLAN, 10544-AAD	5855.000, 171	4.31	5.28	36.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8 , 2024-May-22	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 280.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-22	2024-05-22
psSAR1g [W/kg]	0.417	0.453
psSAR10g [W/kg]	0.132	0.129
Power Drift [dB]	0.09	0.16
M2/M1 [%]		56.6
Dist 3dB Peak [mm]		7.9

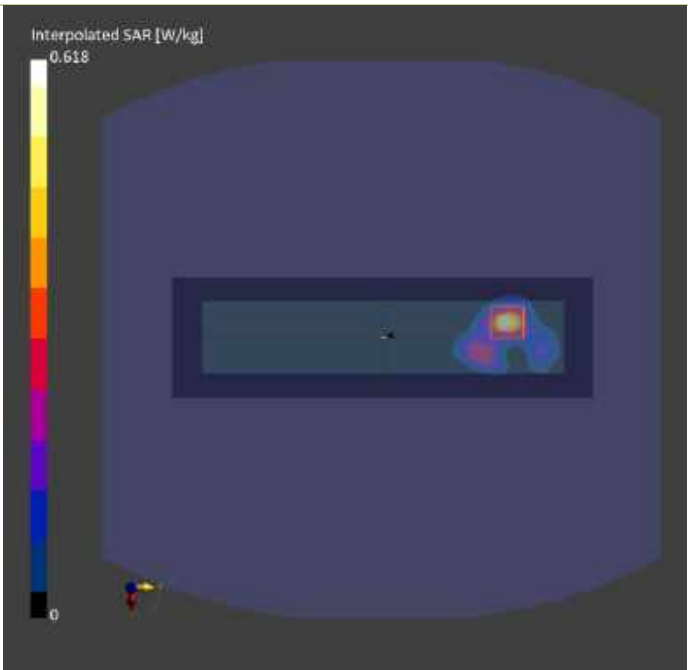

Plots of Measurement

Measurement Report
P12_BT_BR_Front Face_8mm_Ch0_Ant Type_Monopole_Ant 0
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BWIN-WTW-P24030722,	240.0 x 48.0 x 73.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	FRONT, 8.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2402.000, 0	6.71	1.82	39.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H06T27N8 , 2024-May-15	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 288.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-15	2024-05-15
psSAR1g [W/kg]	0.388	0.395
psSAR10g [W/kg]	0.200	0.198
Power Drift [dB]	0.09	0.16
M2/M1 [%]		47.8
Dist 3dB Peak [mm]		15.9

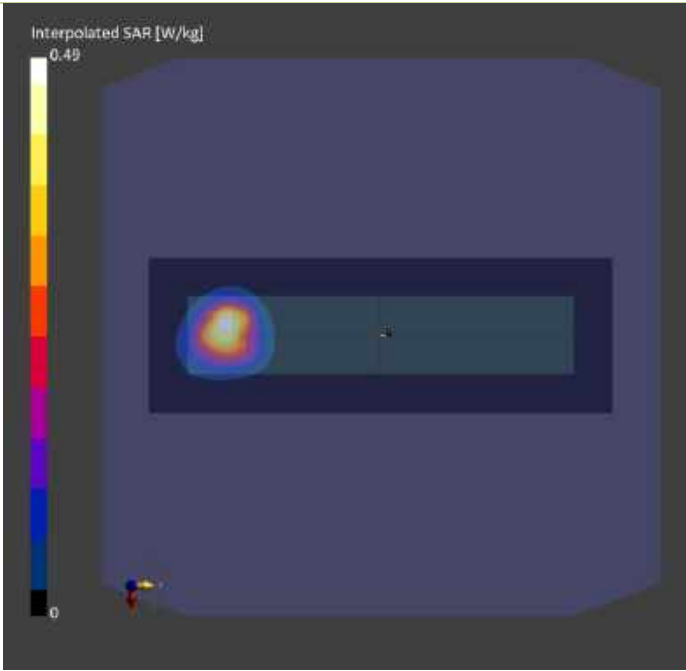

Plots of Measurement

Measurement Report

P13 UNII-5_802.11a_Front Face_8mm_Ch61_Ant Type_PIFA_Ant 0

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BWIN-WTW-P24030722,	240.0 x 48.0 x 73.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Front Face, 8.00	U-NII-5	WLAN, 10062-CAE	6255.000, 61	4.99	5.86	36.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8 , 2024-May-15	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 270.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-15	2024-05-15
psSAR1g [W/kg]	0.454	0.743
psSAR10g [W/kg]	0.188	0.233
psAPD (1.0cm2, sq) [W/m2]		7.43
psAPD (4.0cm2, sq) [W/m2]		5.30
Power Drift [dB]	-0.16	0.11
M2/M1 [%]		50.8
Dist 3dB Peak [mm]		7.0

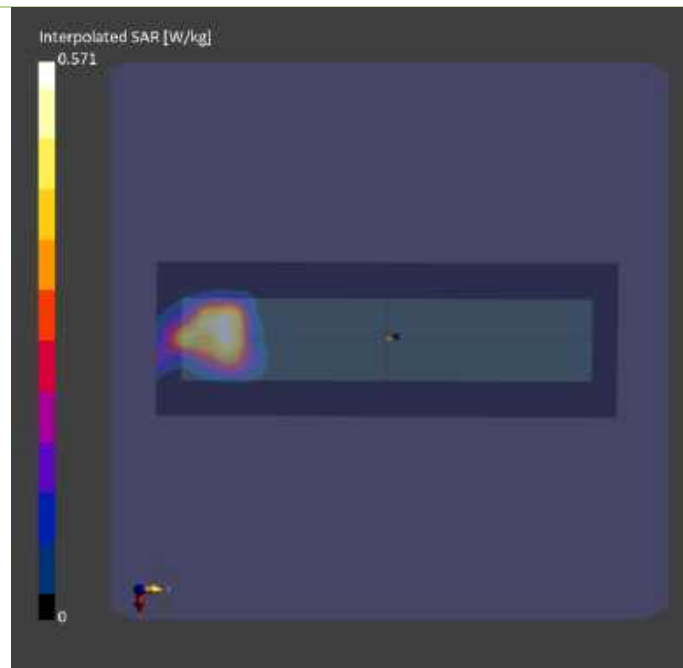

Plots of Measurement

Measurement Report

P14 UNII-5_802.11a_Front Face_8mm_Ch61_Ant Type_Monopole_Ant 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BWIN-WTW-P24030722,	240.0 x 48.0 x 73.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Front Face, 8.00	U-NII-5	WLAN, 10062-CAE	6255.000, 61	4.99	5.78	35.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8 , 2024-May-22	EX3DV4 - SN7736, 2024-02-01	DAE4 Sn1761, 2023-11-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 270.0	23.8 x 23.8 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2024-05-22	2024-05-22
psSAR1g [W/kg]	0.404	0.447
psSAR10g [W/kg]	0.129	0.141
psAPD (1.0cm2, sq) [W/m2]		4.47
psAPD (4.0cm2, sq) [W/m2]		3.23
Power Drift [dB]	-0.10	0.17
M2/M1 [%]		51.6
Dist 3dB Peak [mm]		7.8

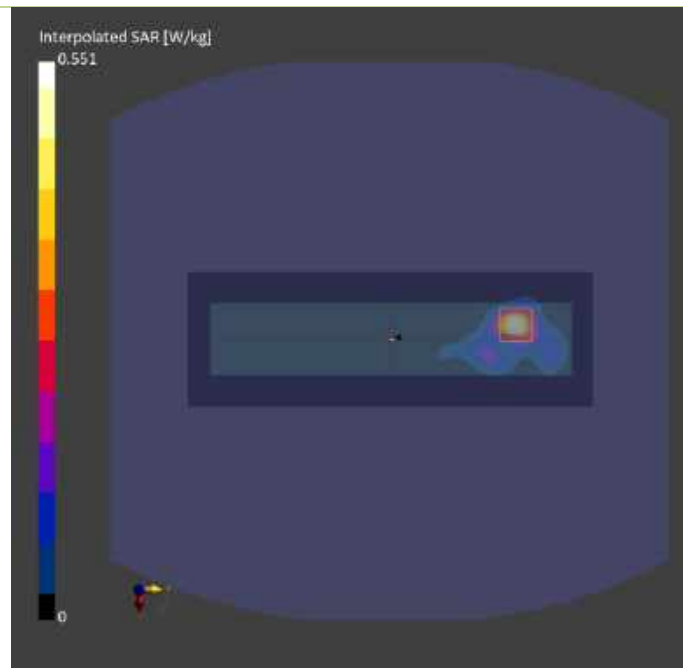

Plots of Measurement

Measurement Report
P13 UNII-5_802.11a_Front Face_8mm_Ch61_Ant Type_PIFA_Ant 0
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BWIN-WTW-P24030722	240.0 x 48.0 x 73.0		

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Front Face, 8.00	U-NII-5	WLAN, 10062-CAE	6255.0, 61	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1029	--Air--	EUmmWV4 - SN9615_F1-55GHz, 2023-07-10	DAE4 Sn1431, 2023-08-24

Scan Setup

	5G Scan
Grid Extents [mm]	96.0 x 96.0
Grid Steps [lambda]	0.125 x 0.125
Sensor Surface [mm]	8.0

Measurement Results

	5G Scan
Date	2024-05-20
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	1.90
psPDtot+ [W/m²]	3.15
psPDmod+ [W/m²]	3.49
E _{max} [V/m]	39.9
Power Drift [dB]	-0.04

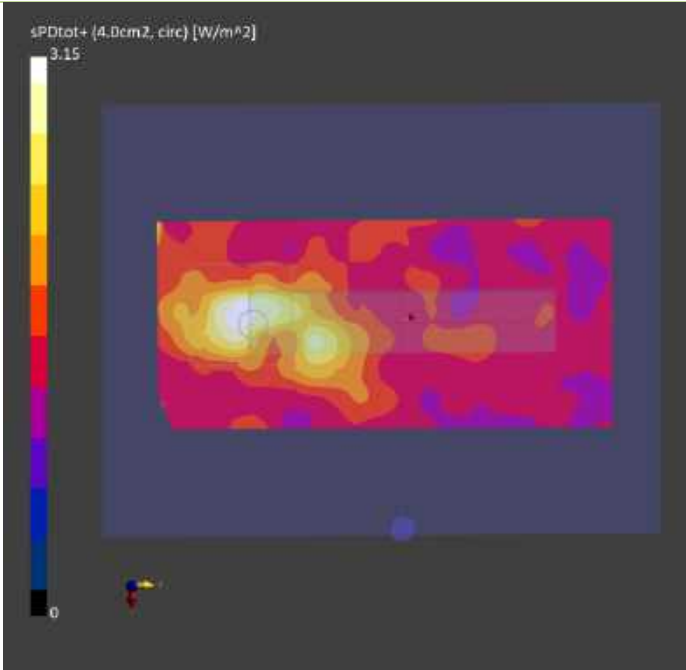

Plots of Measurement

Measurement Report
P14 UNII-5_802.11a_Front Face_8mm_Ch61_Ant Type_Monopole_Ant 1
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BWIN-WTW-P24030722	240.0 x 48.0 x 73.0		

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Front Face, 8.00	U-NII-5	WLAN, 10062-CAE	6255.0, 61	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1029	--Air--	EUmmWV4 - SN9615_F1-55GHz, 2023-07-10	DAE4 Sn1431, 2023-08-24

Scan Setup

	5G Scan
Grid Extents [mm]	96.0 x 96.0
Grid Steps [lambda]	0.125 x 0.125
Sensor Surface [mm]	8.0

Measurement Results

	5G Scan
Date	2024-05-20
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	2.69
psPDtot+ [W/m²]	3.16
psPDmod+ [W/m²]	3.39
E _{max} [V/m]	42.4
Power Drift [dB]	-0.06

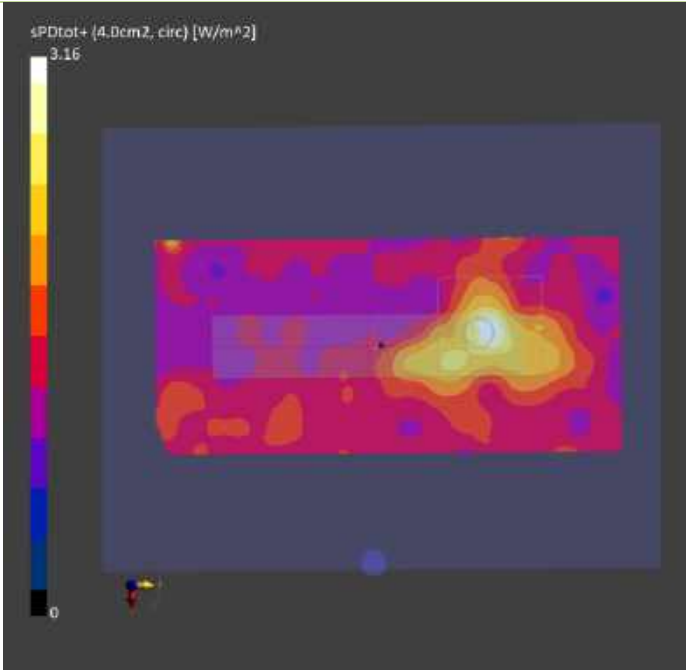

Appendix C. Tissue & System Verification

The measuring results for tissue simulating liquid and system check are shown as below.

Note:

1. For Section 4.3, the dielectric properties of the tissue simulating liquid have been measured within 24 hours before the SAR testing and within ± 10 % of the target values. Liquid temperature during the SAR testing has kept within ± 2 °C.
2. For Section 4.4, The SAR measurement system was validated according to procedures in FCC KDB 865664 D0. The validation status in tabulated summary is as below.
3. For Section 4.5, Comparing to the reference SAR value provided by SPEAG in dipole calibration certificate, the deviation of system check results is within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots please refer to Appendix A of this report.

Tissue Verification									Validation for CW			Validation for Modulation				System Check					Note			
Plot No.	Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (εr)	Targeted Conductivity (σ)	Targeted Permittivity (εr)	Deviation Conductivity (σ)	Deviation Permittivity (εr)	Sensitivity Range	Probe Linearity	Probe Isotropy	Modulation Type	Duty Factor	PAR	Date	Frequency (MHz)	Targeted 1g SAR (W/kg)	Measured 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N	Output Power (dBm)
S01	2450	22.7	1.77	37.6	1.8	39.2	-1.67	-4.08	Pass	Pass	Pass	OFDM	N/A	Pass	May. 20, 2024	2450	52.90	2.48	49.48	-6.46	737	7736	1761	17
S02	5250	22.7	4.54	35.4	4.71	35.9	-3.61	-1.39	Pass	Pass	Pass	OFDM	N/A	Pass	May. 20, 2024	5250	80.20	3.91	78.01	-2.72	1019	7736	1761	17
S03	5600	22.7	4.92	34.7	5.07	35.5	-2.96	-2.25	Pass	Pass	Pass	OFDM	N/A	Pass	May. 20, 2024	5600	82.90	4.32	86.20	3.98	1019	7736	1761	17
S04	5800	22.5	5.09	36.1	5.27	35.3	-3.42	2.27	Pass	Pass	Pass	OFDM	N/A	Pass	May. 21, 2024	5800	80.30	3.97	79.21	-1.36	1019	7736	1761	17
S05	5800	22.5	5.09	36.1	5.27	35.3	-3.42	2.27	Pass	Pass	Pass	OFDM	N/A	Pass	May. 21, 2024	5800	80.30	3.97	79.21	-1.36	1019	7736	1761	17
S06	2450	22.8	1.86	39.9	1.8	39.2	3.33	1.79	Pass	Pass	Pass	OFDM	N/A	Pass	May. 15, 2024	2450	52.90	2.69	53.67	1.46	737	7736	1761	17
S07	2450	22.9	1.82	38.6	1.8	39.2	1.11	-1.53	Pass	Pass	Pass	OFDM	N/A	Pass	May. 17, 2024	2450	52.90	2.68	53.47	1.08	737	7736	1761	17
S08	5250	22.9	4.57	37.6	4.71	35.9	-2.97	4.74	Pass	Pass	Pass	OFDM	N/A	Pass	May. 17, 2024	5250	80.20	3.93	78.41	-2.23	1019	7736	1761	17
S09	5600	22.9	4.97	37	5.07	35.5	-1.97	4.23	Pass	Pass	Pass	OFDM	N/A	Pass	May. 17, 2024	5600	82.90	4.29	85.60	3.25	1019	7736	1761	17
S10	5800	22.6	5.22	36.6	5.27	35.3	-0.95	3.68	Pass	Pass	Pass	OFDM	N/A	Pass	May. 22, 2024	5800	80.30	4	79.81	-0.61	1019	7736	1761	17
S11	5800	22.6	5.22	36.6	5.27	35.3	-0.95	3.68	Pass	Pass	Pass	OFDM	N/A	Pass	May. 22, 2024	5800	80.30	4	79.81	-0.61	1019	7736	1761	17
S12	2450	22.8	1.86	39.9	1.8	39.2	3.33	1.79	Pass	Pass	Pass	OFDM	N/A	Pass	May. 15, 2024	2450	52.90	2.69	53.67	1.46	737	7736	1761	17
S13	6500	22.8	6.15	35.9	6.07	34.5	1.32	4.06	Pass	Pass	Pass	OFDM	N/A	Pass	May. 15, 2024	6500	292.00	28.4	284.00	-2.74	1008	7736	1761	20
S14	6500	22.6	6.08	35.5	6.07	34.5	0.16	2.90	Pass	Pass	Pass	OFDM	N/A	Pass	May. 22, 2024	6500	292.00	29.5	295.00	1.03	1008	7736	1761	20

System Performance Check for Incident Power Density Measurement									
Plot No.	Test Date	Frequency [GHz]	mmWave Probe S/N	Verification Source S/N	Averaging Area [cm ²]	Distance [mm]	Target Power Density [W/m ²]	Measured Power Density [W/m ²]	Deviation [%]
S13	May. 20, 2024	10	9615	1025	4	10.0	56.2	53.9	-4.09%
S14	May. 20, 2024	10	9615	1025	4	10.0	56.2	53.9	-4.09%

Appendix D. Maximum Target Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

Tune-up Power (Full)_PIFA							
WLAN 2.4GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11b	1	2412	17.5	17.5	17.5	17.5	20.5
	6	2437	17.5	17.5	17.5	17.5	20.5
	11	2462	17.5	17.5	17.5	17.5	20.5
	12	2467	16.5	16.5	16.5	16.5	19.5
	13	2472	13.0	13.0	13.0	13.0	16.0
802.11g	1	2412	16.0	16.0	16.0	16.0	19.0
	6	2437	17.5	17.5	17.5	17.5	20.5
	11	2462	16.5	16.5	16.5	16.5	19.5
	12	2467	15.0	15.0	15.0	15.0	18.0
	13	2472	2.0	2.0	2.0	2.0	5.0
802.11n HT20	1	2412	15.0	15.0	15.0	15.0	18.0
	6	2437	17.5	17.5	17.5	17.5	20.5
	11	2462	15.5	15.5	15.5	15.5	18.5
	12	2467	15.0	15.0	15.0	15.0	18.0
	13	2472	2.0	2.0	2.0	2.0	5.0
802.11n HT40	3	2422	15.5	15.5	15.5	15.5	18.5
	6	2437	17.0	17.0	17.0	17.0	20.0
	9	2452	14.5	14.5	14.5	14.5	17.5
	10	2457	14.0	14.0	14.0	14.0	17.0
	11	2462	2.5	2.5	2.5	2.5	5.5
802.11ax HE20	1	2412	15.0	15.0	15.0	15.0	18.0
	6	2437	17.5	17.5	17.5	17.5	20.5
	11	2462	15.5	15.5	15.5	15.5	18.5
	12	2467	15.0	15.0	15.0	15.0	18.0
	13	2472	2.0	2.0	2.0	2.0	5.0
802.11ax HE40	3	2422	15.5	15.5	15.5	15.5	18.5
	6	2437	17.0	17.0	17.0	17.0	20.0
	9	2452	14.5	14.5	14.5	14.5	17.5
	10	2457	14.0	14.0	14.0	14.0	17.0
	11	2462	2.5	2.5	2.5	2.5	5.5

Tune-up Power (Full)_PIFA			
Bluetooth			
Mode	Channel	Frequency	Ant 0 Max Tune-up
BR / EDR	0	2402	16.0
	39	2441	16.0
	78	2480	16.0
LE	0	2402	7.0
	19	2440	7.0
	39	2480	7.0
HSL-C	1	2404	12.0
	18	2438	12.0
	38	2478	12.0

Tune-up Power (Full)_PIFA

WLAN 5.2GHz

Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	36	5180	13.5	13.5	13.5	13.5	16.5
	40	5200	13.5	13.5	13.5	13.5	16.5
	44	5220	13.5	13.5	13.5	13.5	16.5
	48	5240	13.5	13.5	13.5	13.5	16.5
802.11n HT20	36	5180	14.0	14.0	14.0	14.0	17.0
	40	5200	14.0	14.0	14.0	14.0	17.0
	44	5220	14.0	14.0	14.0	14.0	17.0
	48	5240	14.0	14.0	14.0	14.0	17.0
802.11n HT40	38	5190	15.0	15.0	15.0	15.0	18.0
	46	5230	15.0	15.0	15.0	15.0	18.0
802.11ac VHT20	36	5180	14.0	14.0	14.0	14.0	17.0
	40	5200	14.0	14.0	14.0	14.0	17.0
	44	5220	14.0	14.0	14.0	14.0	17.0
	48	5240	14.0	14.0	14.0	14.0	17.0
802.11ac VHT40	38	5190	15.0	15.0	15.0	15.0	18.0
	46	5230	15.0	15.0	15.0	15.0	18.0
802.11ac VHT80	42	5210	14.0	14.0	14.0	14.0	17.0
802.11ax HE20	36	5180	14.0	14.0	14.0	14.0	17.0
	40	5200	14.0	14.0	14.0	14.0	17.0
	44	5220	14.0	14.0	14.0	14.0	17.0
	48	5240	14.0	14.0	14.0	14.0	17.0
802.11ax HE40	38	5190	15.0	15.0	15.0	15.0	18.0
	46	5230	15.0	15.0	15.0	15.0	18.0
802.11ax HE80	42	5210	14.0	14.0	14.0	14.0	17.0

Tune-up Power (Full)_PIFA

WLAN 5.3GHz

Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	52	5260	16.5	16.5	16.5	16.5	19.5
	56	5280	16.5	16.5	16.5	16.5	19.5
	60	5300	16.5	16.5	16.5	16.5	19.5
	64	5320	16.0	16.0	16.0	16.0	19.0
802.11n HT20	52	5260	15.0	15.0	15.0	15.0	18.0
	56	5280	15.0	15.0	15.0	15.0	18.0
	60	5300	15.0	15.0	15.0	15.0	18.0
	64	5320	15.0	15.0	15.0	15.0	18.0
802.11n HT40	54	5270	14.5	14.5	14.5	14.5	17.5
	62	5310	14.0	14.0	14.0	14.0	17.0
802.11ac VHT20	52	5260	15.0	15.0	15.0	15.0	18.0
	56	5280	15.0	15.0	15.0	15.0	18.0
	60	5300	15.0	15.0	15.0	15.0	18.0
	64	5320	15.0	15.0	15.0	15.0	18.0
802.11ac VHT40	54	5270	14.5	14.5	14.5	14.5	17.5
	62	5310	14.0	14.0	14.0	14.0	17.0
802.11ac VHT80	58	5290	11.5	11.5	11.5	11.5	14.5
802.11ac VHT160	50	5250	11.5	11.5	11.5	11.5	14.5
802.11ax HE20	52	5260	15.0	15.0	15.0	15.0	18.0
	56	5280	15.0	15.0	15.0	15.0	18.0
	60	5300	15.0	15.0	15.0	15.0	18.0
	64	5320	15.0	15.0	15.0	15.0	18.0
802.11ax HE40	54	5270	14.5	14.5	14.5	14.5	17.5
	62	5310	14.0	14.0	14.0	14.0	17.0
802.11ax HE80	58	5290	11.5	11.5	11.5	11.5	14.5
802.11ax HE160	50	5250	11.5	11.5	11.5	11.5	14.5

Tune-up Power (Full)_PIFA							
WLAN 5.6GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	100	5500	15.5	15.5	15.5	15.5	18.5
	116	5580	16.5	16.5	16.5	16.5	19.5
	120	5600	16.5	16.5	16.5	16.5	19.5
	124	5620	16.5	16.5	16.5	16.5	19.5
	132	5660	16.5	16.5	16.5	16.5	19.5
	140	5700	14.5	14.5	14.5	14.5	17.5
	144	5720	16.5	16.5	16.5	16.5	19.5
802.11n HT20	100	5500	14.0	14.0	14.0	14.0	17.0
	116	5580	15.0	15.0	15.0	15.0	18.0
	120	5600	15.0	15.0	15.0	15.0	18.0
	124	5620	15.0	15.0	15.0	15.0	18.0
	132	5660	15.0	15.0	15.0	15.0	18.0
	140	5700	14.0	14.0	14.0	14.0	17.0
	144	5720	15.0	15.0	15.0	15.0	18.0
802.11n HT40	102	5510	13.5	13.5	13.5	13.5	16.5
	110	5550	14.5	14.5	14.5	14.5	17.5
	118	5590	14.5	14.5	14.5	14.5	17.5
	126	5630	14.5	14.5	14.5	14.5	17.5
	134	5670	14.5	14.5	14.5	14.5	17.5
	142	5710	14.5	14.5	14.5	14.5	17.5
	144	5720	15.0	15.0	15.0	15.0	18.0
802.11ac VHT20	100	5500	14.0	14.0	14.0	14.0	17.0
	116	5580	15.0	15.0	15.0	15.0	18.0
	120	5600	15.0	15.0	15.0	15.0	18.0
	124	5620	15.0	15.0	15.0	15.0	18.0
	132	5660	15.0	15.0	15.0	15.0	18.0
	140	5700	14.0	14.0	14.0	14.0	17.0
	144	5720	15.0	15.0	15.0	15.0	18.0
802.11ac VHT40	102	5510	13.5	13.5	13.5	13.5	16.5
	110	5550	14.5	14.5	14.5	14.5	17.5
	118	5590	14.5	14.5	14.5	14.5	17.5
	126	5630	14.5	14.5	14.5	14.5	17.5
	134	5670	14.5	14.5	14.5	14.5	17.5
	142	5710	14.5	14.5	14.5	14.5	17.5
	144	5720	15.0	15.0	15.0	15.0	18.0
802.11ac VHT80	106	5530	13.0	13.0	13.0	13.0	16.0
	122	5610	14.0	14.0	14.0	14.0	17.0
	138	5690	14.0	14.0	14.0	14.0	17.0
802.11ac VHT160	114	5570	12.5	12.5	12.5	12.5	15.5
802.11ax HE20	100	5500	14.0	14.0	14.0	14.0	17.0
	116	5580	15.0	15.0	15.0	15.0	18.0
	120	5600	15.0	15.0	15.0	15.0	18.0
	124	5620	15.0	15.0	15.0	15.0	18.0
	132	5660	15.0	15.0	15.0	15.0	18.0
	140	5700	14.0	14.0	14.0	14.0	17.0
	144	5720	15.0	15.0	15.0	15.0	18.0
802.11ax HE40	102	5510	13.5	13.5	13.5	13.5	16.5
	110	5550	14.5	14.5	14.5	14.5	17.5
	118	5590	14.5	14.5	14.5	14.5	17.5
	126	5630	14.5	14.5	14.5	14.5	17.5
	134	5670	14.5	14.5	14.5	14.5	17.5
	142	5710	14.5	14.5	14.5	14.5	17.5



BUREAU
VERITAS

Tune-up Power (Full)_PIFA							
802.11ax HE80	106	5530	13.0	13.0	13.0	13.0	16.0
	122	5610	14.0	14.0	14.0	14.0	17.0
	138	5690	14.0	14.0	14.0	14.0	17.0
802.11ax HE160	114	5570	12.5	12.5	12.5	12.5	15.5

Tune-up Power (Full)_PIFA							
WLAN 5.8GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	149	5745	16.5	16.5	16.5	16.5	19.5
	153	5765	16.5	16.5	16.5	16.5	19.5
	157	5785	16.5	16.5	16.5	16.5	19.5
	161	5805	16.5	16.5	16.5	16.5	19.5
	165	5825	16.5	16.5	16.5	16.5	19.5
802.11n HT20	149	5745	15.0	15.0	15.0	15.0	18.0
	153	5765	15.0	15.0	15.0	15.0	18.0
	157	5785	15.0	15.0	15.0	15.0	18.0
	161	5805	15.0	15.0	15.0	15.0	18.0
	165	5825	15.0	15.0	15.0	15.0	18.0
802.11n HT40	151	5755	14.5	14.5	14.5	14.5	17.5
	159	5795	14.5	14.5	14.5	14.5	17.5
802.11ac VHT20	149	5745	15.0	15.0	15.0	15.0	18.0
	153	5765	15.0	15.0	15.0	15.0	18.0
	157	5785	15.0	15.0	15.0	15.0	18.0
	161	5805	15.0	15.0	15.0	15.0	18.0
	165	5825	15.0	15.0	15.0	15.0	18.0
802.11ac VHT40	151	5755	14.5	14.5	14.5	14.5	17.5
	159	5795	14.5	14.5	14.5	14.5	17.5
802.11ac VHT80	155	5775	14.0	14.0	14.0	14.0	17.0
802.11ax HE20	149	5745	15.0	15.0	15.0	15.0	18.0
	153	5765	15.0	15.0	15.0	15.0	18.0
	157	5785	15.0	15.0	15.0	15.0	18.0
	161	5805	15.0	15.0	15.0	15.0	18.0
	165	5825	15.0	15.0	15.0	15.0	18.0
802.11ax HE40	151	5755	14.5	14.5	14.5	14.5	17.5
	159	5795	14.5	14.5	14.5	14.5	17.5
802.11ax HE80	155	5775	14.0	14.0	14.0	14.0	17.0

Tune-up Power (Full)_PIFA

WLAN 5.9GHz

Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	169	5845	14.5	14.5	14.5	14.5	17.5
	173	5865	14.5	14.5	14.5	14.5	17.5
	177	5885	14.5	14.5	14.5	14.5	17.5
802.11n HT20	169	5845	14.5	14.5	14.5	14.5	17.5
	173	5865	14.5	14.5	14.5	14.5	17.5
	177	5885	14.5	14.5	14.5	14.5	17.5
802.11n HT40	167	5835	16.0	16.0	16.0	16.0	19.0
	175	5875	16.0	16.0	16.0	16.0	19.0
802.11ac VHT20	169	5845	14.5	14.5	14.5	14.5	17.5
	173	5865	14.5	14.5	14.5	14.5	17.5
	177	5885	14.5	14.5	14.5	14.5	17.5
802.11ac VHT40	167	5835	16.0	16.0	16.0	16.0	19.0
	175	5875	16.0	16.0	16.0	16.0	19.0
802.11ac VHT80	171	5855	16.5	16.5	16.5	16.5	19.5
802.11ac VHT160	163	5815	13.0	13.0	13.0	13.0	16.0
802.11ax HE20	169	5845	14.5	14.5	14.5	14.5	17.5
	173	5865	14.5	14.5	14.5	14.5	17.5
	177	5885	14.5	14.5	14.5	14.5	17.5
802.11ax HE40	167	5835	16.0	16.0	16.0	16.0	19.0
	175	5875	16.0	16.0	16.0	16.0	19.0
802.11ax HE80	171	5855	16.5	16.5	16.5	16.5	19.5
802.11ax HE160	163	5815	13.0	13.0	13.0	13.0	16.0

Tune-up Power (Full)_SP_PIFA

UNII-5

Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	2	5935	10.5	10.5	10.5	10.5	13.5
	1	5955	16.0	16.0	16.0	16.0	19.0
	5	5975	16.0	16.0	16.0	16.0	19.0
	9	5995	16.0	16.0	16.0	16.0	19.0
	13	6015	16.0	16.0	16.0	16.0	19.0
	17	6035	16.0	16.0	16.0	16.0	19.0
	21	6055	16.0	16.0	16.0	16.0	19.0
	25	6075	16.0	16.0	16.0	16.0	19.0
	29	6095	16.0	16.0	16.0	16.0	19.0
	33	6115	16.0	16.0	16.0	16.0	19.0
	37	6135	16.0	16.0	16.0	16.0	19.0
	41	6155	16.0	16.0	16.0	16.0	19.0
	45	6175	16.0	16.0	16.0	16.0	19.0
	49	6195	16.0	16.0	16.0	16.0	19.0
	53	6215	16.0	16.0	16.0	16.0	19.0
	57	6235	16.0	16.0	16.0	16.0	19.0
	61	6255	16.0	16.0	16.0	16.0	19.0
	65	6275	16.0	16.0	16.0	16.0	19.0
	69	6295	16.0	16.0	16.0	16.0	19.0
	73	6315	16.0	16.0	16.0	16.0	19.0
	77	6335	16.0	16.0	16.0	16.0	19.0
802.11ax HE20	81	6355	16.0	16.0	16.0	16.0	19.0
	85	6375	16.0	16.0	16.0	16.0	19.0
	89	6395	16.0	16.0	16.0	16.0	19.0
	93	6415	16.0	16.0	16.0	16.0	19.0
	2	5935	-5.0	-5.0	-5.0	-5.0	-2.0
	1	5955	16.0	16.0	16.0	16.0	19.0
	5	5975	16.0	16.0	16.0	16.0	19.0
	9	5995	16.0	16.0	16.0	16.0	19.0
	13	6015	16.0	16.0	16.0	16.0	19.0
	17	6035	16.0	16.0	16.0	16.0	19.0
	21	6055	16.0	16.0	16.0	16.0	19.0
	25	6075	16.0	16.0	16.0	16.0	19.0
	29	6095	16.0	16.0	16.0	16.0	19.0
	33	6115	16.0	16.0	16.0	16.0	19.0
	37	6135	16.0	16.0	16.0	16.0	19.0
	41	6155	16.0	16.0	16.0	16.0	19.0
	45	6175	16.0	16.0	16.0	16.0	19.0
	49	6195	16.0	16.0	16.0	16.0	19.0
	53	6215	16.0	16.0	16.0	16.0	19.0
	57	6235	16.0	16.0	16.0	16.0	19.0
	61	6255	16.0	16.0	16.0	16.0	19.0
	65	6275	16.0	16.0	16.0	16.0	19.0
	69	6295	16.0	16.0	16.0	16.0	19.0
	73	6315	16.0	16.0	16.0	16.0	19.0
	77	6335	16.0	16.0	16.0	16.0	19.0
	81	6355	16.0	16.0	16.0	16.0	19.0
	85	6375	16.0	16.0	16.0	16.0	19.0
	89	6395	16.0	16.0	16.0	16.0	19.0
	93	6415	16.0	16.0	16.0	16.0	19.0

Tune-up Power (Full)_SP_PIFA							
802.11ax HE40	3	5965	15.5	15.5	15.5	15.5	18.5
	11	6005	15.5	15.5	15.5	15.5	18.5
	19	6045	15.5	15.5	15.5	15.5	18.5
	27	6085	15.5	15.5	15.5	15.5	18.5
	35	6125	15.5	15.5	15.5	15.5	18.5
	43	6165	15.5	15.5	15.5	15.5	18.5
	51	6205	15.5	15.5	15.5	15.5	18.5
	59	6245	15.5	15.5	15.5	15.5	18.5
	67	6285	15.5	15.5	15.5	15.5	18.5
	75	6325	15.5	15.5	15.5	15.5	18.5
	83	6365	15.5	15.5	15.5	15.5	18.5
	91	6405	15.5	15.5	15.5	15.5	18.5
802.11ax HE80	7	5985	15.0	15.0	15.0	15.0	18.0
	23	6065	15.0	15.0	15.0	15.0	18.0
	39	6145	15.0	15.0	15.0	15.0	18.0
	55	6225	15.0	15.0	15.0	15.0	18.0
	71	6305	15.0	15.0	15.0	15.0	18.0
	87	6385	15.0	15.0	15.0	15.0	18.0
802.11ax HE160	15	6025	14.5	14.5	14.5	14.5	17.5
	47	6185	14.5	14.5	14.5	14.5	17.5
	79	6345	14.5	14.5	14.5	14.5	17.5

Tune-up Power (Full)_SP_PIFA							
UNII-7							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	117	6535	16.0	16.0	-3.0	16.0	19.0
	121	6555	16.0	16.0	16.0	16.0	19.0
	125	6575	16.0	16.0	16.0	16.0	19.0
	129	6595	16.0	16.0	16.0	16.0	19.0
	133	6615	16.0	16.0	16.0	16.0	19.0
	137	6635	16.0	16.0	16.0	16.0	19.0
	141	6655	16.0	16.0	16.0	16.0	19.0
	145	6675	16.0	16.0	16.0	16.0	19.0
	149	6695	16.0	16.0	16.0	16.0	19.0
	153	6715	16.0	16.0	16.0	16.0	19.0
	157	6735	16.0	16.0	16.0	16.0	19.0
	161	6755	16.0	16.0	16.0	16.0	19.0
	165	6775	16.0	16.0	16.0	16.0	19.0
	169	6795	16.0	16.0	16.0	16.0	19.0
	173	6815	16.0	16.0	16.0	16.0	19.0
	177	6835	16.0	16.0	16.0	16.0	19.0
	181	6855	16.0	16.0	16.0	16.0	19.0
802.11ax HE20	117	6535	16.0	16.0	16.0	16.0	19.0
	121	6555	16.0	16.0	16.0	16.0	19.0
	125	6575	16.0	16.0	16.0	16.0	19.0
	129	6595	16.0	16.0	16.0	16.0	19.0
	133	6615	16.0	16.0	16.0	16.0	19.0
	137	6635	16.0	16.0	16.0	16.0	19.0
	141	6655	16.0	16.0	16.0	16.0	19.0
	145	6675	16.0	16.0	16.0	16.0	19.0
	149	6695	16.0	16.0	16.0	16.0	19.0
	153	6715	16.0	16.0	16.0	16.0	19.0
	157	6735	16.0	16.0	16.0	16.0	19.0
	161	6755	16.0	16.0	16.0	16.0	19.0
	165	6775	16.0	16.0	16.0	16.0	19.0
	169	6795	16.0	16.0	16.0	16.0	19.0
	173	6815	16.0	16.0	16.0	16.0	19.0
	177	6835	16.0	16.0	16.0	16.0	19.0
	181	6855	16.0	16.0	16.0	16.0	19.0
802.11ax HE40	123	6565	15.5	15.5	15.5	15.5	18.5
	131	6605	15.5	15.5	15.5	15.5	18.5
	139	6645	15.5	15.5	15.5	15.5	18.5
	147	6685	15.5	15.5	15.5	15.5	18.5
	155	6725	15.5	15.5	15.5	15.5	18.5
	163	6765	15.5	15.5	15.5	15.5	18.5
	171	6805	15.5	15.5	15.5	15.5	18.5
	179	6845	15.5	15.5	15.5	15.5	18.5
802.11ax HE80	135	6625	15.0	15.0	15.0	15.0	18.0
	151	6705	15.0	15.0	15.0	15.0	18.0
	167	6785	15.0	15.0	15.0	15.0	18.0
802.11ax HE160	143	6665	14.5	14.5	14.5	14.5	17.5

Tune-up Power (Full)_LPI_PIFA

UNII-5

Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	2	5935	1.0	1.0	1.0	1.0	4.0
	1	5955	1.0	1.0	1.0	1.0	4.0
	5	5975	1.0	1.0	1.0	1.0	4.0
	9	5995	1.0	1.0	1.0	1.0	4.0
	13	6015	1.0	1.0	1.0	1.0	4.0
	17	6035	1.0	1.0	1.0	1.0	4.0
	21	6055	1.0	1.0	1.0	1.0	4.0
	25	6075	1.0	1.0	1.0	1.0	4.0
	29	6095	1.0	1.0	1.0	1.0	4.0
	33	6115	1.0	1.0	1.0	1.0	4.0
	37	6135	1.0	1.0	1.0	1.0	4.0
	41	6155	1.0	1.0	1.0	1.0	4.0
	45	6175	1.0	1.0	1.0	1.0	4.0
	49	6195	1.0	1.0	1.0	1.0	4.0
	53	6215	1.0	1.0	1.0	1.0	4.0
	57	6235	1.0	1.0	1.0	1.0	4.0
	61	6255	1.0	1.0	1.0	1.0	4.0
	65	6275	1.0	1.0	1.0	1.0	4.0
	69	6295	1.0	1.0	1.0	1.0	4.0
	73	6315	1.0	1.0	1.0	1.0	4.0
	77	6335	1.0	1.0	1.0	1.0	4.0
	81	6355	1.0	1.0	1.0	1.0	4.0
	85	6375	1.0	1.0	1.0	1.0	4.0
	89	6395	1.0	1.0	1.0	1.0	4.0
	93	6415	1.0	1.0	1.0	1.0	4.0
802.11ax HE20	2	5935	-4.0	-4.0	1.0	1.0	-1.0
	1	5955	1.0	1.0	1.0	1.0	4.0
	5	5975	1.0	1.0	1.0	1.0	4.0
	9	5995	1.0	1.0	1.0	1.0	4.0
	13	6015	1.0	1.0	1.0	1.0	4.0
	17	6035	1.0	1.0	1.0	1.0	4.0
	21	6055	1.0	1.0	1.0	1.0	4.0
	25	6075	1.0	1.0	1.0	1.0	4.0
	29	6095	1.0	1.0	1.0	1.0	4.0
	33	6115	1.0	1.0	1.0	1.0	4.0
	37	6135	1.0	1.0	1.0	1.0	4.0
	41	6155	1.0	1.0	1.0	1.0	4.0
	45	6175	1.0	1.0	1.0	1.0	4.0
	49	6195	1.0	1.0	1.0	1.0	4.0
	53	6215	1.0	1.0	1.0	1.0	4.0
	57	6235	1.0	1.0	1.0	1.0	4.0
	61	6255	1.0	1.0	1.0	1.0	4.0
	65	6275	1.0	1.0	1.0	1.0	4.0
	69	6295	1.0	1.0	1.0	1.0	4.0
	73	6315	1.0	1.0	1.0	1.0	4.0
	77	6335	1.0	1.0	1.0	1.0	4.0
	81	6355	1.0	1.0	1.0	1.0	4.0
	85	6375	1.0	1.0	1.0	1.0	4.0
	89	6395	1.0	1.0	1.0	1.0	4.0
	93	6415	1.0	1.0	1.0	1.0	4.0



BUREAU
VERITAS

Tune-up Power (Full)_LPI_PIFA							
802.11ax HE40	3	5965	4.0	4.0	4.0	4.0	7.0
	11	6005	4.0	4.0	4.0	4.0	7.0
	19	6045	4.0	4.0	4.0	4.0	7.0
	27	6085	4.0	4.0	4.0	4.0	7.0
	35	6125	4.0	4.0	4.0	4.0	7.0
	43	6165	4.0	4.0	4.0	4.0	7.0
	51	6205	4.0	4.0	4.0	4.0	7.0
	59	6245	4.0	4.0	4.0	4.0	7.0
	67	6285	4.0	4.0	4.0	4.0	7.0
	75	6325	4.0	4.0	4.0	4.0	7.0
	83	6365	4.0	4.0	4.0	4.0	7.0
	91	6405	4.0	4.0	4.0	4.0	7.0
802.11ax HE80	7	5985	6.5	6.5	6.5	6.5	9.5
	23	6065	6.5	6.5	6.5	6.5	9.5
	39	6145	6.5	6.5	6.5	6.5	9.5
	55	6225	6.5	6.5	6.5	6.5	9.5
	71	6305	6.5	6.5	6.5	6.5	9.5
	87	6385	6.5	6.5	6.5	6.5	9.5
802.11ax HE160	15	6025	9.5	9.5	9.5	9.5	12.5
	47	6185	9.5	9.5	9.5	9.5	12.5
	79	6345	9.5	9.5	9.5	9.5	12.5

Tune-up Power (Full)_LPI_PIFA							
UNII-6							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	97	6435	1.0	1.0	1.0	1.0	4.0
	101	6455	1.0	1.0	1.0	1.0	4.0
	105	6475	1.0	1.0	1.0	1.0	4.0
	109	6495	1.0	1.0	1.0	1.0	4.0
	113	6515	1.0	1.0	1.0	1.0	4.0
802.11ax HE20	97	6435	1.0	1.0	1.0	1.0	4.0
	101	6455	1.0	1.0	1.0	1.0	4.0
	105	6475	1.0	1.0	1.0	1.0	4.0
	109	6495	1.0	1.0	1.0	1.0	4.0
	113	6515	1.0	1.0	1.0	1.0	4.0
802.11ax HE40	99	6445	4.0	4.0	4.0	4.0	7.0
	107	6485	4.0	4.0	4.0	4.0	7.0
	115	6525	4.0	4.0	4.0	4.0	7.0
802.11ax HE80	103	6465	6.5	6.5	6.5	6.5	9.5
	119	6545	6.5	6.5	6.5	6.5	9.5
802.11ax HE160	111	6505	9.5	9.5	9.5	9.5	12.5

Tune-up Power (Full)_LPI_PIFA							
UNII-7							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	117	6535	1.0	1.0	1.0	1.0	4.0
	121	6555	1.0	1.0	1.0	1.0	4.0
	125	6575	1.0	1.0	1.0	1.0	4.0
	129	6595	1.0	1.0	1.0	1.0	4.0
	133	6615	1.0	1.0	1.0	1.0	4.0
	137	6635	1.0	1.0	1.0	1.0	4.0
	141	6655	1.0	1.0	1.0	1.0	4.0
	145	6675	1.0	1.0	1.0	1.0	4.0
	149	6695	1.0	1.0	1.0	1.0	4.0
	153	6715	1.0	1.0	1.0	1.0	4.0
	157	6735	1.0	1.0	1.0	1.0	4.0
	161	6755	1.0	1.0	1.0	1.0	4.0
	165	6775	1.0	1.0	1.0	1.0	4.0
	169	6795	1.0	1.0	1.0	1.0	4.0
	173	6815	1.0	1.0	1.0	1.0	4.0
	177	6835	1.0	1.0	1.0	1.0	4.0
	181	6855	1.0	1.0	1.0	1.0	4.0
	185	6875	1.0	1.0	1.0	1.0	4.0
802.11ax HE20	117	6535	1.0	1.0	1.0	1.0	4.0
	121	6555	1.0	1.0	1.0	1.0	4.0
	125	6575	1.0	1.0	1.0	1.0	4.0
	129	6595	1.0	1.0	1.0	1.0	4.0
	133	6615	1.0	1.0	1.0	1.0	4.0
	137	6635	1.0	1.0	1.0	1.0	4.0
	141	6655	1.0	1.0	1.0	1.0	4.0
	145	6675	1.0	1.0	1.0	1.0	4.0
	149	6695	1.0	1.0	1.0	1.0	4.0
	153	6715	1.0	1.0	1.0	1.0	4.0
	157	6735	1.0	1.0	1.0	1.0	4.0
	161	6755	1.0	1.0	1.0	1.0	4.0
	165	6775	1.0	1.0	1.0	1.0	4.0
	169	6795	1.0	1.0	1.0	1.0	4.0
	173	6815	1.0	1.0	1.0	1.0	4.0
	177	6835	1.0	1.0	1.0	1.0	4.0
	181	6855	1.0	1.0	1.0	1.0	4.0
	185	6875	1.0	1.0	1.0	1.0	4.0
802.11ax HE40	123	6565	4.0	4.0	4.0	4.0	7.0
	131	6605	4.0	4.0	4.0	4.0	7.0
	139	6645	4.0	4.0	4.0	4.0	7.0
	147	6685	4.0	4.0	4.0	4.0	7.0
	155	6725	4.0	4.0	4.0	4.0	7.0
	163	6765	4.0	4.0	4.0	4.0	7.0
	171	6805	4.0	4.0	4.0	4.0	7.0
	179	6845	4.0	4.0	4.0	4.0	7.0
	187	6885	4.0	4.0	4.0	4.0	7.0
802.11ax HE80	135	6625	6.5	6.5	6.5	6.5	9.5
	151	6705	6.5	6.5	6.5	6.5	9.5
	167	6785	6.5	6.5	6.5	6.5	9.5
	183	6865	6.5	6.5	6.5	6.5	9.5
802.11ax HE160	143	6665	9.5	9.5	9.5	9.5	12.5
	175	6825	9.5	9.5	9.5	9.5	12.5

Tune-up Power (Full)_LPI_PIFA							
UNII-8							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	189	6895	1.0	1.0	1.0	1.0	4.0
	193	6915	1.0	1.0	1.0	1.0	4.0
	197	6935	1.0	1.0	1.0	1.0	4.0
	201	6955	1.0	1.0	1.0	1.0	4.0
	205	6975	1.0	1.0	1.0	1.0	4.0
	209	6995	1.0	1.0	1.0	1.0	4.0
	213	7015	1.0	1.0	1.0	1.0	4.0
	217	7035	1.0	1.0	1.0	1.0	4.0
	221	7055	1.0	1.0	1.0	1.0	4.0
	225	7075	1.0	1.0	1.0	1.0	4.0
	229	7095	1.0	1.0	1.0	1.0	4.0
	233	7115	1.0	1.0	1.0	1.0	4.0
802.11ax HE20	189	6895	1.0	1.0	1.0	1.0	4.0
	193	6915	1.0	1.0	1.0	1.0	4.0
	197	6935	1.0	1.0	1.0	1.0	4.0
	201	6955	1.0	1.0	1.0	1.0	4.0
	205	6975	1.0	1.0	1.0	1.0	4.0
	209	6995	1.0	1.0	1.0	1.0	4.0
	213	7015	1.0	1.0	1.0	1.0	4.0
	217	7035	1.0	1.0	1.0	1.0	4.0
	221	7055	1.0	1.0	1.0	1.0	4.0
	225	7075	1.0	1.0	1.0	1.0	4.0
	229	7095	1.0	1.0	1.0	1.0	4.0
	233	7115	-4.0	-4.0	-4.0	-4.0	-1.0
802.11ax HE40	195	6925	4.0	4.0	4.0	4.0	7.0
	203	6965	4.0	4.0	4.0	4.0	7.0
	211	7005	4.0	4.0	4.0	4.0	7.0
	219	7045	4.0	4.0	4.0	4.0	7.0
	227	7085	4.0	4.0	4.0	4.0	7.0
802.11ax HE80	199	6945	6.5	6.5	6.5	6.5	9.5
	215	7025	6.5	6.5	6.5	6.5	9.5
802.11ax HE160	207	6985	9.5	9.5	9.5	9.5	12.5

Tune-up Power (Full)_Monopole

WLAN 2.4GHz

Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11b	1	2412	10.5	10.5	10.5	10.5	13.5
	6	2437	11.5	11.5	11.5	11.5	14.5
	11	2462	11.0	11.0	11.0	11.0	14.0
	12	2467	8.5	8.5	8.5	8.5	11.5
	13	2472	5.0	5.0	5.0	5.0	8.0
802.11g	1	2412	11.5	11.5	11.5	11.5	14.5
	6	2437	11.5	11.5	11.5	11.5	14.5
	11	2462	11.5	11.5	11.5	11.5	14.5
	12	2467	11.5	11.5	11.5	11.5	14.5
	13	2472	2.0	2.0	2.0	2.0	5.0
802.11n HT20	1	2412	11.5	11.5	11.5	11.5	14.5
	6	2437	11.5	11.5	11.5	11.5	14.5
	11	2462	11.5	11.5	11.5	11.5	14.5
	12	2467	11.5	11.5	11.5	11.5	14.5
	13	2472	2.0	2.0	2.0	2.0	5.0
802.11n HT40	3	2422	11.5	11.5	11.5	11.5	14.5
	6	2437	11.5	11.5	11.5	11.5	14.5
	9	2452	11.5	11.5	11.5	11.5	14.5
	10	2457	11.5	11.5	11.5	11.5	14.5
	11	2462	2.5	2.5	2.5	2.5	5.5
802.11ax HE20	1	2412	11.5	11.5	11.5	11.5	14.5
	6	2437	11.5	11.5	11.5	11.5	14.5
	11	2462	11.5	11.5	11.5	11.5	14.5
	12	2467	11.5	11.5	11.5	11.5	14.5
	13	2472	2.0	2.0	2.0	2.0	5.0
802.11ax HE40	3	2422	11.5	11.5	11.5	11.5	14.5
	6	2437	11.5	11.5	11.5	11.5	14.5
	9	2452	11.5	11.5	11.5	11.5	14.5
	10	2457	11.5	11.5	11.5	11.5	14.5
	11	2462	2.5	2.5	2.5	2.5	5.5



Tune-up Power (Full)_Monopole

Bluetooth

Mode	Channel	Frequency	Ant 0 Max Tune-up	
BR / EDR	0	2402	16.0	
	39	2441	16.0	
	78	2480	16.0	
LE	0	2402	7.0	
	19	2440	7.0	
	39	2480	7.0	

Tune-up Power (Full)_Monopole

WLAN 5.2GHz

Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	36	5180	13.5	13.5	13.5	13.5	16.5
	40	5200	13.5	13.5	13.5	13.5	16.5
	44	5220	13.5	13.5	13.5	13.5	16.5
	48	5240	13.5	13.5	13.5	13.5	16.5
802.11n HT20	36	5180	14.0	14.0	14.0	14.0	17.0
	40	5200	14.0	14.0	14.0	14.0	17.0
	44	5220	14.0	14.0	14.0	14.0	17.0
	48	5240	14.0	14.0	14.0	14.0	17.0
802.11n HT40	38	5190	14.5	14.5	14.5	14.5	17.5
	46	5230	14.5	14.5	14.5	14.5	17.5
802.11ac VHT20	36	5180	14.0	14.0	14.0	14.0	17.0
	40	5200	14.0	14.0	14.0	14.0	17.0
	44	5220	14.0	14.0	14.0	14.0	17.0
	48	5240	14.0	14.0	14.0	14.0	17.0
802.11ac VHT40	38	5190	14.5	14.5	14.5	14.5	17.5
	46	5230	14.5	14.5	14.5	14.5	17.5
802.11ac VHT80	42	5210	14.0	14.0	14.0	14.0	17.0
802.11ax HE20	36	5180	14.0	14.0	14.0	14.0	17.0
	40	5200	14.0	14.0	14.0	14.0	17.0
	44	5220	14.0	14.0	14.0	14.0	17.0
	48	5240	14.0	14.0	14.0	14.0	17.0
802.11ax HE40	38	5190	14.5	14.5	14.5	14.5	17.5
	46	5230	14.5	14.5	14.5	14.5	17.5
802.11ax HE80	42	5210	14.0	14.0	14.0	14.0	17.0

Tune-up Power (Full)_Monopole

WLAN 5.3GHz

Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	52	5260	14.5	14.5	14.5	14.5	17.5
	56	5280	14.5	14.5	14.5	14.5	17.5
	60	5300	14.5	14.5	14.5	14.5	17.5
	64	5320	14.0	14.0	14.0	14.0	17.0
802.11n HT20	52	5260	13.0	13.0	13.0	13.0	16.0
	56	5280	13.0	13.0	13.0	13.0	16.0
	60	5300	13.0	13.0	13.0	13.0	16.0
	64	5320	13.0	13.0	13.0	13.0	16.0
802.11n HT40	54	5270	12.5	12.5	12.5	12.5	15.5
	62	5310	12.0	12.0	12.0	12.0	15.0
802.11ac VHT20	52	5260	13.0	13.0	13.0	13.0	16.0
	56	5280	13.0	13.0	13.0	13.0	16.0
	60	5300	13.0	13.0	13.0	13.0	16.0
	64	5320	13.0	13.0	13.0	13.0	16.0
802.11ac VHT40	54	5270	12.5	12.5	12.5	12.5	15.5
	62	5310	12.0	12.0	12.0	12.0	15.0
802.11ac VHT80	58	5290	9.5	9.5	9.5	9.5	12.5
802.11ac VHT160	50	5250	9.5	9.5	9.5	9.5	12.5
802.11ax HE20	52	5260	13.0	13.0	13.0	13.0	16.0
	56	5280	13.0	13.0	13.0	13.0	16.0
	60	5300	13.0	13.0	13.0	13.0	16.0
	64	5320	13.0	13.0	13.0	13.0	16.0
802.11ax HE40	54	5270	12.5	12.5	12.5	12.5	15.5
	62	5310	12.0	12.0	12.0	12.0	15.0
802.11ax HE80	58	5290	9.5	9.5	9.5	9.5	12.5
802.11ax HE160	50	5250	9.5	9.5	9.5	9.5	12.5

Tune-up Power (Full)_Monopole							
WLAN 5.6GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	100	5500	13.5	13.5	13.5	13.5	16.5
	116	5580	14.5	14.5	14.5	14.5	17.5
	120	5600	14.5	14.5	14.5	14.5	17.5
	124	5620	14.5	14.5	14.5	14.5	17.5
	132	5660	14.5	14.5	14.5	14.5	17.5
	140	5700	12.5	12.5	12.5	12.5	15.5
	144	5720	14.5	14.5	14.5	14.5	17.5
802.11n HT20	100	5500	12.0	12.0	12.0	12.0	15.0
	116	5580	13.0	13.0	13.0	13.0	16.0
	120	5600	13.0	13.0	13.0	13.0	16.0
	124	5620	13.0	13.0	13.0	13.0	16.0
	132	5660	13.0	13.0	13.0	13.0	16.0
	140	5700	12.0	12.0	12.0	12.0	15.0
	144	5720	13.0	13.0	13.0	13.0	16.0
802.11n HT40	102	5510	11.5	11.5	11.5	11.5	14.5
	110	5550	12.5	12.5	12.5	12.5	15.5
	118	5590	12.5	12.5	12.5	12.5	15.5
	126	5630	12.5	12.5	12.5	12.5	15.5
	134	5670	12.5	12.5	12.5	12.5	15.5
	142	5710	12.5	12.5	12.5	12.5	15.5
802.11ac VHT20	100	5500	12.0	12.0	12.0	12.0	15.0
	116	5580	13.0	13.0	13.0	13.0	16.0
	120	5600	13.0	13.0	13.0	13.0	16.0
	124	5620	13.0	13.0	13.0	13.0	16.0
	132	5660	13.0	13.0	13.0	13.0	16.0
	140	5700	12.0	12.0	12.0	12.0	15.0
	144	5720	13.0	13.0	13.0	13.0	16.0
802.11ac VHT40	102	5510	11.5	11.5	11.5	11.5	14.5
	110	5550	12.5	12.5	12.5	12.5	15.5
	118	5590	12.5	12.5	12.5	12.5	15.5
	126	5630	12.5	12.5	12.5	12.5	15.5
	134	5670	12.5	12.5	12.5	12.5	15.5
	142	5710	12.5	12.5	12.5	12.5	15.5
802.11ac VHT80	106	5530	11.0	11.0	11.0	11.0	14.0
	122	5610	12.0	12.0	12.0	12.0	15.0
	138	5690	12.0	12.0	12.0	12.0	15.0
802.11ac VHT160	114	5570	10.5	10.5	10.5	10.5	13.5
802.11ax HE20	100	5500	12.0	12.0	12.0	12.0	15.0
	116	5580	13.0	13.0	13.0	13.0	16.0
	120	5600	13.0	13.0	13.0	13.0	16.0
	124	5620	13.0	13.0	13.0	13.0	16.0
	132	5660	13.0	13.0	13.0	13.0	16.0
	140	5700	12.0	12.0	12.0	12.0	15.0
	144	5720	13.0	13.0	13.0	13.0	16.0
802.11ax HE40	102	5510	11.5	11.5	11.5	11.5	14.5
	110	5550	12.5	12.5	12.5	12.5	15.5
	118	5590	12.5	12.5	12.5	12.5	15.5
	126	5630	12.5	12.5	12.5	12.5	15.5
	134	5670	12.5	12.5	12.5	12.5	15.5
	142	5710	12.5	12.5	12.5	12.5	15.5



BUREAU
VERITAS

Tune-up Power (Full)_Monopole

802.11ax HE80	106	5530	11.0	11.0	11.0	11.0	14.0
	122	5610	12.0	12.0	12.0	12.0	15.0
	138	5690	12.0	12.0	12.0	12.0	15.0
802.11ax HE160	114	5570	10.5	10.5	10.5	10.5	13.5

Tune-up Power (Full)_Monopole

WLAN 5.8GHz

Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	149	5745	14.5	14.5	14.5	14.5	17.5
	153	5765	14.5	14.5	14.5	14.5	17.5
	157	5785	14.5	14.5	14.5	14.5	17.5
	161	5805	14.5	14.5	14.5	14.5	17.5
	165	5825	14.5	14.5	14.5	14.5	17.5
802.11n HT20	149	5745	13.0	13.0	13.0	13.0	16.0
	153	5765	13.0	13.0	13.0	13.0	16.0
	157	5785	13.0	13.0	13.0	13.0	16.0
	161	5805	13.0	13.0	13.0	13.0	16.0
	165	5825	13.0	13.0	13.0	13.0	16.0
802.11n HT40	151	5755	12.5	12.5	12.5	12.5	15.5
	159	5795	12.5	12.5	12.5	12.5	15.5
802.11ac VHT20	149	5745	13.0	13.0	13.0	13.0	16.0
	153	5765	13.0	13.0	13.0	13.0	16.0
	157	5785	13.0	13.0	13.0	13.0	16.0
	161	5805	13.0	13.0	13.0	13.0	16.0
	165	5825	13.0	13.0	13.0	13.0	16.0
802.11ac VHT40	151	5755	12.5	12.5	12.5	12.5	15.5
	159	5795	12.5	12.5	12.5	12.5	15.5
802.11ac VHT80	155	5775	12.0	12.0	12.0	12.0	15.0
802.11ax HE20	149	5745	13.0	13.0	13.0	13.0	16.0
	153	5765	13.0	13.0	13.0	13.0	16.0
	157	5785	13.0	13.0	13.0	13.0	16.0
	161	5805	13.0	13.0	13.0	13.0	16.0
	165	5825	13.0	13.0	13.0	13.0	16.0
802.11ax HE40	151	5755	12.5	12.5	12.5	12.5	15.5
	159	5795	12.5	12.5	12.5	12.5	15.5
802.11ax HE80	155	5775	12.0	12.0	12.0	12.0	15.0

Tune-up Power (Full)_Monopole

WLAN 5.9GHz

Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	169	5845	12.5	12.5	12.5	12.5	15.5
	173	5865	12.5	12.5	12.5	12.5	15.5
	177	5885	12.5	12.5	12.5	12.5	15.5
802.11n HT20	169	5845	12.5	12.5	12.5	12.5	15.5
	173	5865	12.5	12.5	12.5	12.5	15.5
	177	5885	12.5	12.5	12.5	12.5	15.5
802.11n HT40	167	5835	14.0	14.0	14.0	14.0	17.0
	175	5875	14.0	14.0	14.0	14.0	17.0
802.11ac VHT20	169	5845	12.5	12.5	12.5	12.5	15.5
	173	5865	12.5	12.5	12.5	12.5	15.5
	177	5885	12.5	12.5	12.5	12.5	15.5
802.11ac VHT40	167	5835	14.0	14.0	14.0	14.0	17.0
	175	5875	14.0	14.0	14.0	14.0	17.0
802.11ac VHT80	171	5855	14.5	14.5	14.5	14.5	17.5
802.11ac VHT160	163	5815	11.0	11.0	11.0	11.0	14.0
802.11ax HE20	169	5845	12.5	12.5	12.5	12.5	15.5
	173	5865	12.5	12.5	12.5	12.5	15.5
	177	5885	12.5	12.5	12.5	12.5	15.5
802.11ax HE40	167	5835	14.0	14.0	14.0	14.0	17.0
	175	5875	14.0	14.0	14.0	14.0	17.0
802.11ax HE80	171	5855	14.5	14.5	14.5	14.5	17.5
802.11ax HE160	163	5815	11.0	11.0	11.0	11.0	14.0



BUREAU
VERITAS

Tune-up Power (Full)_SP_Monopole

UNII-5

Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	2	5935	8.0	8.0	8.0	8.0	11.0
	1	5955	13.5	13.5	13.5	13.5	16.5
	5	5975	13.5	13.5	13.5	13.5	16.5
	9	5995	13.5	13.5	13.5	13.5	16.5
	13	6015	13.5	13.5	13.5	13.5	16.5
	17	6035	13.5	13.5	13.5	13.5	16.5
	21	6055	13.5	13.5	13.5	13.5	16.5
	25	6075	13.5	13.5	13.5	13.5	16.5
	29	6095	13.5	13.5	13.5	13.5	16.5
	33	6115	13.5	13.5	13.5	13.5	16.5
	37	6135	13.5	13.5	13.5	13.5	16.5
	41	6155	13.5	13.5	13.5	13.5	16.5
	45	6175	13.5	13.5	13.5	13.5	16.5
	49	6195	13.5	13.5	13.5	13.5	16.5
	53	6215	13.5	13.5	13.5	13.5	16.5
	57	6235	13.5	13.5	13.5	13.5	16.5
	61	6255	13.5	13.5	13.5	13.5	16.5
	65	6275	13.5	13.5	13.5	13.5	16.5
	69	6295	13.5	13.5	13.5	13.5	16.5
	73	6315	13.5	13.5	13.5	13.5	16.5
802.11ax HE20	77	6335	13.5	13.5	13.5	13.5	16.5
	81	6355	13.5	13.5	13.5	13.5	16.5
	85	6375	13.5	13.5	13.5	13.5	16.5
	89	6395	13.5	13.5	13.5	13.5	16.5
	93	6415	13.5	13.5	13.5	13.5	16.5
	2	5935	-7.5	-7.5	-7.5	-7.5	-4.5
	1	5955	13.5	13.5	13.5	13.5	16.5
	5	5975	13.5	13.5	13.5	13.5	16.5
	9	5995	13.5	13.5	13.5	13.5	16.5
	13	6015	13.5	13.5	13.5	13.5	16.5
	17	6035	13.5	13.5	13.5	13.5	16.5
	21	6055	13.5	13.5	13.5	13.5	16.5
	25	6075	13.5	13.5	13.5	13.5	16.5
	29	6095	13.5	13.5	13.5	13.5	16.5
	33	6115	13.5	13.5	13.5	13.5	16.5
	37	6135	13.5	13.5	13.5	13.5	16.5
	41	6155	13.5	13.5	13.5	13.5	16.5
	45	6175	13.5	13.5	13.5	13.5	16.5
	49	6195	13.5	13.5	13.5	13.5	16.5
	53	6215	13.5	13.5	13.5	13.5	16.5
	57	6235	13.5	13.5	13.5	13.5	16.5
	61	6255	13.5	13.5	13.5	13.5	16.5
	65	6275	13.5	13.5	13.5	13.5	16.5
	69	6295	13.5	13.5	13.5	13.5	16.5
	73	6315	13.5	13.5	13.5	13.5	16.5
	77	6335	13.5	13.5	13.5	13.5	16.5
	81	6355	13.5	13.5	13.5	13.5	16.5
	85	6375	13.5	13.5	13.5	13.5	16.5
	89	6395	13.5	13.5	13.5	13.5	16.5
	93	6415	13.5	13.5	13.5	13.5	16.5



BUREAU
VERITAS

Tune-up Power (Full)_SP_Monopole							
802.11ax HE40	3	5965	13.0	13.0	13.0	13.0	16.0
	11	6005	13.0	13.0	13.0	13.0	16.0
	19	6045	13.0	13.0	13.0	13.0	16.0
	27	6085	13.0	13.0	13.0	13.0	16.0
	35	6125	13.0	13.0	13.0	13.0	16.0
	43	6165	13.0	13.0	13.0	13.0	16.0
	51	6205	13.0	13.0	13.0	13.0	16.0
	59	6245	13.0	13.0	13.0	13.0	16.0
	67	6285	13.0	13.0	13.0	13.0	16.0
	75	6325	13.0	13.0	13.0	13.0	16.0
	83	6365	13.0	13.0	13.0	13.0	16.0
	91	6405	13.0	13.0	13.0	13.0	16.0
802.11ax HE80	7	5985	12.5	12.5	12.5	12.5	15.5
	23	6065	12.5	12.5	12.5	12.5	15.5
	39	6145	12.5	12.5	12.5	12.5	15.5
	55	6225	12.5	12.5	12.5	12.5	15.5
	71	6305	12.5	12.5	12.5	12.5	15.5
	87	6385	12.5	12.5	12.5	12.5	15.5
802.11ax HE160	15	6025	12.0	12.0	12.0	12.0	15.0
	47	6185	12.0	12.0	12.0	12.0	15.0
	79	6345	12.0	12.0	12.0	12.0	15.0

Tune-up Power (Full)_SP_Monopole							
UNII-7							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	117	6535	13.5	13.5	13.5	13.5	16.5
	121	6555	13.5	13.5	13.5	13.5	16.5
	125	6575	13.5	13.5	13.5	13.5	16.5
	129	6595	13.5	13.5	13.5	13.5	16.5
	133	6615	13.5	13.5	13.5	13.5	16.5
	137	6635	13.5	13.5	13.5	13.5	16.5
	141	6655	13.5	13.5	13.5	13.5	16.5
	145	6675	13.5	13.5	13.5	13.5	16.5
	149	6695	13.5	13.5	13.5	13.5	16.5
	153	6715	13.5	13.5	13.5	13.5	16.5
	157	6735	13.5	13.5	13.5	13.5	16.5
	161	6755	13.5	13.5	13.5	13.5	16.5
	165	6775	13.5	13.5	13.5	13.5	16.5
	169	6795	13.5	13.5	13.5	13.5	16.5
	173	6815	13.5	13.5	13.5	13.5	16.5
	177	6835	13.5	13.5	13.5	13.5	16.5
	181	6855	13.5	13.5	13.5	13.5	16.5
802.11ax HE20	117	6535	13.5	13.5	13.5	13.5	16.5
	121	6555	13.5	13.5	13.5	13.5	16.5
	125	6575	13.5	13.5	13.5	13.5	16.5
	129	6595	13.5	13.5	13.5	13.5	16.5
	133	6615	13.5	13.5	13.5	13.5	16.5
	137	6635	13.5	13.5	13.5	13.5	16.5
	141	6655	13.5	13.5	13.5	13.5	16.5
	145	6675	13.5	13.5	13.5	13.5	16.5
	149	6695	13.5	13.5	13.5	13.5	16.5
	153	6715	13.5	13.5	13.5	13.5	16.5
	157	6735	13.5	13.5	13.5	13.5	16.5
	161	6755	13.5	13.5	13.5	13.5	16.5
	165	6775	13.5	13.5	13.5	13.5	16.5
	169	6795	13.5	13.5	13.5	13.5	16.5
	173	6815	13.5	13.5	13.5	13.5	16.5
	177	6835	13.5	13.5	13.5	13.5	16.5
	181	6855	13.5	13.5	13.5	13.5	16.5
802.11ax HE40	123	6565	13.0	13.0	13.0	13.0	16.0
	131	6605	13.0	13.0	13.0	13.0	16.0
	139	6645	13.0	13.0	13.0	13.0	16.0
	147	6685	13.0	13.0	13.0	13.0	16.0
	155	6725	13.0	13.0	13.0	13.0	16.0
	163	6765	13.0	13.0	13.0	13.0	16.0
	171	6805	13.0	13.0	13.0	13.0	16.0
	179	6845	13.0	13.0	13.0	13.0	16.0
802.11ax HE80	135	6625	12.5	12.5	12.5	12.5	15.5
	151	6705	12.5	12.5	12.5	12.5	15.5
	167	6785	12.5	12.5	12.5	12.5	15.5
802.11ax HE160	143	6665	12.0	12.0	12.0	12.0	15.0

Tune-up Power (Full)_LPI_Monopole							
UNII-5							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	2	5935	1.0	1.0	1.0	1.0	4.0
	1	5955	1.0	1.0	1.0	1.0	4.0
	5	5975	1.0	1.0	1.0	1.0	4.0
	9	5995	1.0	1.0	1.0	1.0	4.0
	13	6015	1.0	1.0	1.0	1.0	4.0
	17	6035	1.0	1.0	1.0	1.0	4.0
	21	6055	1.0	1.0	1.0	1.0	4.0
	25	6075	1.0	1.0	1.0	1.0	4.0
	29	6095	1.0	1.0	1.0	1.0	4.0
	33	6115	1.0	1.0	1.0	1.0	4.0
	37	6135	1.0	1.0	1.0	1.0	4.0
	41	6155	1.0	1.0	1.0	1.0	4.0
	45	6175	1.0	1.0	1.0	1.0	4.0
	49	6195	1.0	1.0	1.0	1.0	4.0
	53	6215	1.0	1.0	1.0	1.0	4.0
	57	6235	1.0	1.0	1.0	1.0	4.0
	61	6255	1.0	1.0	1.0	1.0	4.0
	65	6275	1.0	1.0	1.0	1.0	4.0
	69	6295	1.0	1.0	1.0	1.0	4.0
	73	6315	1.0	1.0	1.0	1.0	4.0
	77	6335	1.0	1.0	1.0	1.0	4.0
	81	6355	1.0	1.0	1.0	1.0	4.0
	85	6375	1.0	1.0	1.0	1.0	4.0
	89	6395	1.0	1.0	1.0	1.0	4.0
	93	6415	1.0	1.0	1.0	1.0	4.0
802.11ax HE20	2	5935	-4.0	-4.0	-4.0	-4.0	-1.0
	1	5955	1.0	1.0	1.0	1.0	4.0
	5	5975	1.0	1.0	1.0	1.0	4.0
	9	5995	1.0	1.0	1.0	1.0	4.0
	13	6015	1.0	1.0	1.0	1.0	4.0
	17	6035	1.0	1.0	1.0	1.0	4.0
	21	6055	1.0	1.0	1.0	1.0	4.0
	25	6075	1.0	1.0	1.0	1.0	4.0
	29	6095	1.0	1.0	1.0	1.0	4.0
	33	6115	1.0	1.0	1.0	1.0	4.0
	37	6135	1.0	1.0	1.0	1.0	4.0
	41	6155	1.0	1.0	1.0	1.0	4.0
	45	6175	1.0	1.0	1.0	1.0	4.0
	49	6195	1.0	1.0	1.0	1.0	4.0
	53	6215	1.0	1.0	1.0	1.0	4.0
	57	6235	1.0	1.0	1.0	1.0	4.0
	61	6255	1.0	1.0	1.0	1.0	4.0
	65	6275	1.0	1.0	1.0	1.0	4.0
	69	6295	1.0	1.0	1.0	1.0	4.0
	73	6315	1.0	1.0	1.0	1.0	4.0
	77	6335	1.0	1.0	1.0	1.0	4.0
	81	6355	1.0	1.0	1.0	1.0	4.0
	85	6375	1.0	1.0	1.0	1.0	4.0
	89	6395	1.0	1.0	1.0	1.0	4.0
	93	6415	1.0	1.0	1.0	1.0	4.0



BUREAU
VERITAS

Tune-up Power (Full)_LPI_Monopole							
802.11ax HE40	3	5965	4.0	4.0	4.0	4.0	7.0
	11	6005	4.0	4.0	4.0	4.0	7.0
	19	6045	4.0	4.0	4.0	4.0	7.0
	27	6085	4.0	4.0	4.0	4.0	7.0
	35	6125	4.0	4.0	4.0	4.0	7.0
	43	6165	4.0	4.0	4.0	4.0	7.0
	51	6205	4.0	4.0	4.0	4.0	7.0
	59	6245	4.0	4.0	4.0	4.0	7.0
	67	6285	4.0	4.0	4.0	4.0	7.0
	75	6325	4.0	4.0	4.0	4.0	7.0
	83	6365	4.0	4.0	4.0	4.0	7.0
	91	6405	4.0	4.0	4.0	4.0	7.0
802.11ax HE80	7	5985	6.5	6.5	6.5	6.5	9.5
	23	6065	6.5	6.5	6.5	6.5	9.5
	39	6145	6.5	6.5	6.5	6.5	9.5
	55	6225	6.5	6.5	6.5	6.5	9.5
	71	6305	6.5	6.5	6.5	6.5	9.5
	87	6385	6.5	6.5	6.5	6.5	9.5
802.11ax HE160	15	6025	9.5	9.5	9.5	9.5	12.5
	47	6185	9.5	9.5	9.5	9.5	12.5
	79	6345	9.5	9.5	9.5	9.5	12.5

Tune-up Power (Full)_LPI_Monopole							
UNII-6							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	97	6435	1.0	1.0	1.0	1.0	4.0
	101	6455	1.0	1.0	1.0	1.0	4.0
	105	6475	1.0	1.0	1.0	1.0	4.0
	109	6495	1.0	1.0	1.0	1.0	4.0
	113	6515	1.0	1.0	1.0	1.0	4.0
802.11ax HE20	97	6435	1.0	1.0	1.0	1.0	4.0
	101	6455	1.0	1.0	1.0	1.0	4.0
	105	6475	1.0	1.0	1.0	1.0	4.0
	109	6495	1.0	1.0	1.0	1.0	4.0
	113	6515	1.0	1.0	1.0	1.0	4.0
802.11ax HE40	99	6445	4.0	4.0	4.0	4.0	7.0
	107	6485	4.0	4.0	4.0	4.0	7.0
	115	6525	4.0	4.0	4.0	4.0	7.0
802.11ax HE80	103	6465	6.5	6.5	6.5	6.5	9.5
	119	6545	6.5	6.5	6.5	6.5	9.5
802.11ax HE160	111	6505	9.5	9.5	9.5	9.5	12.5

Tune-up Power (Full)_LPI_Monopole							
UNII-7							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	117	6535	1.0	1.0	1.0	1.0	4.0
	121	6555	1.0	1.0	1.0	1.0	4.0
	125	6575	1.0	1.0	1.0	1.0	4.0
	129	6595	1.0	1.0	1.0	1.0	4.0
	133	6615	1.0	1.0	1.0	1.0	4.0
	137	6635	1.0	1.0	1.0	1.0	4.0
	141	6655	1.0	1.0	1.0	1.0	4.0
	145	6675	1.0	1.0	1.0	1.0	4.0
	149	6695	1.0	1.0	1.0	1.0	4.0
	153	6715	1.0	1.0	1.0	1.0	4.0
	157	6735	1.0	1.0	1.0	1.0	4.0
	161	6755	1.0	1.0	1.0	1.0	4.0
	165	6775	1.0	1.0	1.0	1.0	4.0
	169	6795	1.0	1.0	1.0	1.0	4.0
	173	6815	1.0	1.0	1.0	1.0	4.0
	177	6835	1.0	1.0	1.0	1.0	4.0
	181	6855	1.0	1.0	1.0	1.0	4.0
	185	6875	1.0	1.0	1.0	1.0	4.0
802.11ax HE20	117	6535	1.0	1.0	1.0	1.0	4.0
	121	6555	1.0	1.0	1.0	1.0	4.0
	125	6575	1.0	1.0	1.0	1.0	4.0
	129	6595	1.0	1.0	1.0	1.0	4.0
	133	6615	1.0	1.0	1.0	1.0	4.0
	137	6635	1.0	1.0	1.0	1.0	4.0
	141	6655	1.0	1.0	1.0	1.0	4.0
	145	6675	1.0	1.0	1.0	1.0	4.0
	149	6695	1.0	1.0	1.0	1.0	4.0
	153	6715	1.0	1.0	1.0	1.0	4.0
	157	6735	1.0	1.0	1.0	1.0	4.0
	161	6755	1.0	1.0	1.0	1.0	4.0
	165	6775	1.0	1.0	1.0	1.0	4.0
	169	6795	1.0	1.0	1.0	1.0	4.0
	173	6815	1.0	1.0	1.0	1.0	4.0
	177	6835	1.0	1.0	1.0	1.0	4.0
	181	6855	1.0	1.0	1.0	1.0	4.0
	185	6875	1.0	1.0	1.0	1.0	4.0
802.11ax HE40	123	6565	4.0	4.0	4.0	4.0	7.0
	131	6605	4.0	4.0	4.0	4.0	7.0
	139	6645	4.0	4.0	4.0	4.0	7.0
	147	6685	4.0	4.0	4.0	4.0	7.0
	155	6725	4.0	4.0	4.0	4.0	7.0
	163	6765	4.0	4.0	4.0	4.0	7.0
	171	6805	4.0	4.0	4.0	4.0	7.0
	179	6845	4.0	4.0	4.0	4.0	7.0
	187	6885	4.0	4.0	4.0	4.0	7.0
802.11ax HE80	135	6625	6.5	6.5	6.5	6.5	9.5
	151	6705	6.5	6.5	6.5	6.5	9.5
	167	6785	6.5	6.5	6.5	6.5	9.5
	183	6865	6.5	6.5	6.5	6.5	9.5
802.11ax HE160	143	6665	9.5	9.5	9.5	9.5	12.5
	175	6825	9.5	9.5	9.5	9.5	12.5

Tune-up Power (Full)_LPI_Monopole							
UNII-8							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	189	6895	1.0	1.0	1.0	1.0	4.0
	193	6915	1.0	1.0	1.0	1.0	4.0
	197	6935	1.0	1.0	1.0	1.0	4.0
	201	6955	1.0	1.0	1.0	1.0	4.0
	205	6975	1.0	1.0	1.0	1.0	4.0
	209	6995	1.0	1.0	1.0	1.0	4.0
	213	7015	1.0	1.0	1.0	1.0	4.0
	217	7035	1.0	1.0	1.0	1.0	4.0
	221	7055	1.0	1.0	1.0	1.0	4.0
	225	7075	1.0	1.0	1.0	1.0	4.0
	229	7095	1.0	1.0	1.0	1.0	4.0
	233	7115	1.0	1.0	1.0	1.0	4.0
802.11ax HE20	189	6895	1.0	1.0	1.0	1.0	4.0
	193	6915	1.0	1.0	1.0	1.0	4.0
	197	6935	1.0	1.0	1.0	1.0	4.0
	201	6955	1.0	1.0	1.0	1.0	4.0
	205	6975	1.0	1.0	1.0	1.0	4.0
	209	6995	1.0	1.0	1.0	1.0	4.0
	213	7015	1.0	1.0	1.0	1.0	4.0
	217	7035	1.0	1.0	1.0	1.0	4.0
	221	7055	1.0	1.0	1.0	1.0	4.0
	225	7075	1.0	1.0	1.0	1.0	4.0
	229	7095	1.0	1.0	1.0	1.0	4.0
	233	7115	-4.0	-4.0	-4.0	-4.0	-1.0
802.11ax HE40	195	6925	4.0	4.0	4.0	4.0	7.0
	203	6965	4.0	4.0	4.0	4.0	7.0
	211	7005	4.0	4.0	4.0	4.0	7.0
	219	7045	4.0	4.0	4.0	4.0	7.0
	227	7085	4.0	4.0	4.0	4.0	7.0
802.11ax HE80	199	6945	6.5	6.5	6.5	6.5	9.5
	215	7025	6.5	6.5	6.5	6.5	9.5
802.11ax HE160	207	6985	9.5	9.5	9.5	9.5	12.5

Appendix E. Measured Conducted Power Result

The measuring conducted power (Unit: dBm) are shown as below.

Conducted Power (Full)_PIFA			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	17.36
	6	2437	17.45
	11	2462	17.23
	12	2467	16.49
	13	2472	12.91
802.11g	1	2412	15.88
	6	2437	17.28
	11	2462	16.32
	12	2467	14.76
	13	2472	1.81
802.11n HT20	1	2412	14.76
	6	2437	17.4
	11	2462	15.29
	12	2467	14.88
	13	2472	1.78
802.11n HT40	3	2422	15.38
	6	2437	16.79
	9	2452	14.37
	10	2457	13.82
	11	2462	2.34
802.11ax HE20	1	2412	14.77
	6	2437	17.33
	11	2462	15.29
	12	2467	14.93
	13	2472	1.95
802.11ax HE40	3	2422	15.32
	6	2437	16.95
	9	2452	14.33
	10	2457	13.88
	11	2462	2.45

Conducted Power (Full)_PIFA			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	17.25
	6	2437	17.42
	11	2462	17.36
	12	2467	16.49
	13	2472	12.83
802.11g	1	2412	15.79
	6	2437	17.41
	11	2462	16.28
	12	2467	14.81
	13	2472	1.79
802.11n HT20	1	2412	14.8
	6	2437	17.35
	11	2462	15.34
	12	2467	14.85
	13	2472	1.94
802.11n HT40	3	2422	15.26
	6	2437	16.76
	9	2452	14.3
	10	2457	13.81
	11	2462	2.27
802.11ax HE20	1	2412	14.95
	6	2437	17.42
	11	2462	15.27
	12	2467	14.81
	13	2472	1.86
802.11ax HE40	3	2422	15.42
	6	2437	16.95
	9	2452	14.45
	10	2457	13.79
	11	2462	2.38

Conducted Power (Full)_PIFA					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11b	1	2412	17.32	16.81	20.08
	6	2437	17.48	17.25	20.38
	11	2462	17.42	17.14	20.29
	12	2467	15.11	14.85	17.99
	13	2472	11.52	11.64	14.59
802.11g	1	2412	14.45	14.37	17.42
	6	2437	17.45	17.15	20.31
	11	2462	15.22	15.02	18.13
	12	2467	13.51	13.6	16.57
	13	2472	0.6	0.89	3.76
802.11n HT20	1	2412	13.19	13.32	16.27
	6	2437	17.4	17.2	20.31
	11	2462	13.98	13.75	16.88
	12	2467	13.25	13.44	16.36
	13	2472	0.36	0.77	3.58
802.11n HT40	3	2422	13.8	13.69	16.76
	6	2437	16.88	16.66	19.78
	9	2452	13	12.68	15.85
	10	2457	12.4	12.32	15.37
	11	2462	0.88	1.15	4.03
802.11ax HE20	1	2412	13.36	13.43	16.41
	6	2437	17.42	17.08	20.26
	11	2462	14.21	14.11	17.17
	12	2467	13.47	13.59	16.54
	13	2472	0.48	0.94	3.73
802.11ax HE40	3	2422	13.85	13.75	16.81
	6	2437	16.94	16.7	19.83
	9	2452	13.11	12.77	15.95
	10	2457	12.55	12.44	15.51
	11	2462	0.94	1.23	4.10

Conducted Power (Full)_PIFA			
Bluetooth Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
BR / EDR	0	2402	14.41
	39	2441	14.28
	78	2480	14.35
LE	0	2402	6.68
	19	2440	6.52
	39	2480	6.64
HSL-C	1	2404	11.44
	18	2438	11.55
	38	2478	11

Conducted Power (Full)_PIFA			
WLAN 5.2GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	36	5180	13.43
	40	5200	13.48
	44	5220	13.46
	48	5240	13.43
802.11n HT20	36	5180	13.94
	40	5200	13.95
	44	5220	13.99
	48	5240	13.93
802.11n HT40	38	5190	14.98
	46	5230	14.96
802.11ac VHT20	36	5180	13.98
	40	5200	13.97
	44	5220	13.92
	48	5240	13.91
802.11ac VHT40	38	5190	14.95
	46	5230	14.96
802.11ac VHT80	42	5210	13.91
802.11ax HE20	36	5180	13.91
	40	5200	13.95
	44	5220	13.91
	48	5240	13.98
802.11ax HE40	38	5190	14.92
	46	5230	14.92
802.11ax HE80	42	5210	13.94

Conducted Power (Full)_PIFA			
WLAN 5.2GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	36	5180	13.44
	40	5200	13.42
	44	5220	13.43
	48	5240	13.46
802.11n HT20	36	5180	13.92
	40	5200	13.95
	44	5220	13.99
	48	5240	13.99
802.11n HT40	38	5190	14.99
	46	5230	14.86
802.11ac VHT20	36	5180	13.99
	40	5200	13.92
	44	5220	13.97
	48	5240	13.92
802.11ac VHT40	38	5190	14.96
	46	5230	14.92
802.11ac VHT80	42	5210	13.96
802.11ax HE20	36	5180	13.99
	40	5200	13.91
	44	5220	13.95
	48	5240	13.98
802.11ax HE40	38	5190	14.98
	46	5230	14.97
802.11ax HE80	42	5210	13.95

Conducted Power (Full)_PIFA					
WLAN 5.2GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	36	5180	13.46	13.49	16.49
	40	5200	13.45	13.47	16.47
	44	5220	13.48	13.45	16.48
	48	5240	13.49	13.48	16.5
802.11n HT20	36	5180	13.94	13.96	16.96
	40	5200	13.92	13.95	16.95
	44	5220	13.95	13.98	16.98
	48	5240	13.92	13.91	16.93
802.11n HT40	38	5190	14.85	14.03	17.47
	46	5230	14.82	13.3	17.14
802.11ac VHT20	36	5180	13.91	13.93	16.93
	40	5200	13.93	13.9	16.93
	44	5220	13.95	13.94	16.96
	48	5240	13.96	13.97	16.98
802.11ac VHT40	38	5190	13.86	14.6	17.26
	46	5230	13.84	14.62	17.26
802.11ac VHT80	42	5210	12.15	12.73	15.46
802.11ax HE20	36	5180	13.97	13.95	16.97
	40	5200	13.95	13.98	16.98
	44	5220	13.92	13.91	16.93
	48	5240	13.96	13.94	16.96
802.11ax HE40	38	5190	14.06	14.71	17.41
	46	5230	14.03	14.52	17.29
802.11ax HE80	42	5210	12.32	12.81	15.58

Conducted Power (Full)_PIFA			
WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	52	5260	16.42
	56	5280	16.49
	60	5300	16.47
	64	5320	15.91
802.11n HT20	52	5260	14.91
	56	5280	14.98
	60	5300	14.94
	64	5320	14.99
802.11n HT40	54	5270	14.44
	62	5310	13.97
802.11ac VHT20	52	5260	14.95
	56	5280	14.92
	60	5300	14.93
	64	5320	14.94
802.11ac VHT40	54	5270	14.45
	62	5310	13.96
802.11ac VHT80	58	5290	11.49
802.11ac VHT160	50	5250	11.46
802.11ax HE20	52	5260	14.96
	56	5280	14.99
	60	5300	14.92
	64	5320	14.95
802.11ax HE40	54	5270	14.48
	62	5310	13.98
802.11ax HE80	58	5290	11.48
802.11ax HE160	50	5250	11.43

Conducted Power (Full)_PIFA			
WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	52	5260	16.45
	56	5280	16.48
	60	5300	16.46
	64	5320	15.95
802.11n HT20	52	5260	14.97
	56	5280	14.95
	60	5300	14.93
	64	5320	14.97
802.11n HT40	54	5270	14.49
	62	5310	13.99
802.11ac VHT20	52	5260	14.91
	56	5280	14.92
	60	5300	14.96
	64	5320	14.95
802.11ac VHT40	54	5270	14.49
	62	5310	13.93
802.11ac VHT80	58	5290	11.43
802.11ac VHT160	50	5250	11.46
802.11ax HE20	52	5260	14.96
	56	5280	14.92
	60	5300	14.94
	64	5320	14.97
802.11ax HE40	54	5270	14.48
	62	5310	13.97
802.11ax HE80	58	5290	11.49
802.11ax HE160	50	5250	11.46

Conducted Power (Full)_PIFA					
WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	52	5260	16.44	16.42	19.44
	56	5280	16.49	16.48	19.5
	60	5300	16.41	16.45	19.44
	64	5320	15.97	15.96	18.98
802.11n HT20	52	5260	14.96	14.98	17.98
	56	5280	14.95	14.98	17.98
	60	5300	14.98	14.94	17.97
	64	5320	14.98	14.93	17.97
802.11n HT40	54	5270	14.43	14.42	17.44
	62	5310	13.93	13.97	16.96
802.11ac VHT20	52	5260	14.94	14.91	17.94
	56	5280	14.94	14.92	17.94
	60	5300	14.99	14.94	17.98
	64	5320	14.99	14.91	17.96
802.11ac VHT40	54	5270	14.49	14.48	17.5
	62	5310	13.95	13.91	16.94
802.11ac VHT80	58	5290	11.44	11.42	14.44
802.11ac VHT160	50	5250	11.42	11.42	14.43
802.11ax HE20	52	5260	14.93	14.97	17.96
	56	5280	14.91	14.96	17.95
	60	5300	14.95	14.98	17.98
	64	5320	14.99	14.93	17.97
802.11ax HE40	54	5270	14.41	14.49	17.46
	62	5310	13.95	13.93	16.95
802.11ax HE80	58	5290	11.46	11.42	14.45
802.11ax HE160	50	5250	11.43	11.44	14.45

Conducted Power (Full)_PIFA			
WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	100	5500	15.47
	116	5580	16.47
	120	5600	16.45
	124	5620	16.44
	132	5660	16.44
	140	5700	14.44
	144	5720	16.45
802.11n HT20	100	5500	13.93
	116	5580	14.91
	120	5600	14.97
	124	5620	14.98
	132	5660	14.91
	140	5700	13.94
	144	5720	14.99
802.11n HT40	102	5510	13.49
	110	5550	14.48
	118	5590	14.45
	126	5630	14.44
	134	5670	14.47
	142	5710	14.45
802.11ac VHT20	100	5500	13.98
	116	5580	14.96
	120	5600	14.91
	124	5620	14.92
	132	5660	14.95
	140	5700	13.91
	144	5720	14.97
802.11ac VHT40	102	5510	13.42
	110	5550	14.48
	118	5590	14.43
	126	5630	14.49
	134	5670	14.46
	142	5710	14.43
802.11ac VHT80	106	5530	12.95
	122	5610	13.98
	138	5690	13.95
802.11ac VHT160	114	5570	12.49
802.11ax HE20	100	5500	13.99
	116	5580	14.91
	120	5600	14.95
	124	5620	14.94
	132	5660	14.92
	140	5700	13.95
	144	5720	14.96
802.11ax HE40	102	5510	13.45
	110	5550	14.48
	118	5590	14.43
	126	5630	14.46
	134	5670	14.45
	142	5710	14.47

Conducted Power (Full)_PIFA			
802.11ax HE80	106	5530	12.93
	122	5610	13.96
	138	5690	13.92
802.11ax HE160	114	5570	12.41

Conducted Power (Full)_PIFA			
WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	100	5500	15.45
	116	5580	16.49
	120	5600	16.46
	124	5620	16.46
	132	5660	16.41
	140	5700	14.45
	144	5720	16.48
802.11n HT20	100	5500	13.98
	116	5580	14.96
	120	5600	14.91
	124	5620	14.99
	132	5660	14.94
	140	5700	13.93
802.11n HT40	144	5720	14.98
	102	5510	13.49
	110	5550	14.43
	118	5590	14.48
	126	5630	14.43
	134	5670	14.42
802.11ac VHT20	142	5710	14.41
	100	5500	13.91
	116	5580	14.91
	120	5600	14.98
	124	5620	14.95
	132	5660	14.92
802.11ac VHT40	140	5700	13.93
	144	5720	14.94
	102	5510	13.45
	110	5550	14.48
	118	5590	14.46
	126	5630	14.42
802.11ac VHT80	134	5670	14.44
	142	5710	14.45
	106	5530	12.96
802.11ac VHT160	122	5610	13.96
	138	5690	13.98
802.11ax HE20	114	5570	12.44
	100	5500	13.97
	116	5580	14.97
	120	5600	14.91
	124	5620	14.93
	132	5660	14.99
	140	5700	13.92
802.11ax HE40	144	5720	14.97
	102	5510	13.46
	110	5550	14.42
	118	5590	14.41
	126	5630	14.42
	134	5670	14.49
	142	5710	14.47

Conducted Power (Full)_PIFA			
802.11ax HE80	106	5530	12.93
	122	5610	13.99
	138	5690	13.94
802.11ax HE160	114	5570	12.47

Conducted Power (Full)_PIFA					
WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	100	5500	15.44	15.46	18.46
	116	5580	16.47	16.49	19.49
	120	5600	16.46	16.47	19.48
	124	5620	16.41	16.41	19.42
	132	5660	16.45	16.47	19.47
	140	5700	14.47	14.47	17.48
	144	5720	16.47	16.47	19.48
802.11n HT20	100	5500	13.94	13.98	16.97
	116	5580	14.94	14.93	17.95
	120	5600	14.96	14.98	17.98
	124	5620	14.92	14.99	17.97
	132	5660	14.91	14.97	17.95
	140	5700	13.97	13.95	16.97
	144	5720	14.96	14.92	17.95
802.11n HT40	102	5510	13.42	13.43	16.44
	110	5550	14.42	14.47	17.46
	118	5590	14.43	14.47	17.46
	126	5630	14.43	14.46	17.46
	134	5670	14.41	14.45	17.44
	142	5710	14.45	14.41	17.44
802.11ac VHT20	100	5500	13.96	13.95	16.97
	116	5580	14.91	14.96	17.95
	120	5600	14.93	14.97	17.96
	124	5620	14.99	14.93	17.97
	132	5660	14.96	14.92	17.95
	140	5700	13.95	13.91	16.94
	144	5720	14.96	14.98	17.98
802.11ac VHT40	102	5510	13.45	13.43	16.45
	110	5550	14.44	14.43	17.45
	118	5590	14.48	14.41	17.46
	126	5630	14.49	14.43	17.47
	134	5670	14.42	14.49	17.47
	142	5710	14.47	14.46	17.48
802.11ac VHT80	106	5530	12.95	12.94	15.96
	122	5610	13.95	13.96	16.97
	138	5690	13.98	13.91	16.96
802.11ac VHT160	114	5570	12.46	12.49	15.49
802.11ax HE20	100	5500	13.99	13.92	16.97
	116	5580	14.96	14.92	17.95
	120	5600	14.94	14.99	17.98
	124	5620	14.97	14.94	17.97
	132	5660	14.95	14.98	17.98
	140	5700	13.93	13.94	16.95
	144	5720	14.94	14.97	17.97
802.11ax HE40	102	5510	13.44	13.46	16.46
	110	5550	14.47	14.49	17.49
	118	5590	14.48	14.43	17.47
	126	5630	14.41	14.46	17.45
	134	5670	14.49	14.46	17.49
	142	5710	14.42	14.43	17.44



BUREAU
VERITAS

Conducted Power (Full)_PIFA					
802.11ax HE80	106	5530	12.96	12.99	15.99
	122	5610	13.96	13.94	16.96
	138	5690	13.96	13.97	16.98
802.11ax HE160	114	5570	12.47	12.46	15.48

Conducted Power (Full)_PIFA			
WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	149	5745	16.49
	153	5765	16.43
	157	5785	16.47
	161	5805	16.46
	165	5825	16.44
802.11n HT20	149	5745	14.97
	153	5765	14.94
	157	5785	14.93
	161	5805	14.95
	165	5825	14.93
802.11n HT40	151	5755	14.46
	159	5795	14.49
802.11ac VHT20	149	5745	14.92
	153	5765	14.93
	157	5785	14.95
	161	5805	14.91
	165	5825	14.93
802.11ac VHT40	151	5755	14.46
	159	5795	14.41
802.11ac VHT80	155	5775	13.91
802.11ax HE20	149	5745	14.94
	153	5765	14.95
	157	5785	14.93
	161	5805	14.93
	165	5825	14.96
802.11ax HE40	151	5755	14.42
	159	5795	14.49
802.11ax HE80	155	5775	13.93

Conducted Power (Full)_PIFA			
WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	149	5745	16.46
	153	5765	16.44
	157	5785	16.43
	161	5805	16.45
	165	5825	16.42
802.11n HT20	149	5745	14.99
	153	5765	14.96
	157	5785	14.99
	161	5805	14.98
	165	5825	14.94
802.11n HT40	151	5755	14.43
	159	5795	14.49
802.11ac VHT20	149	5745	14.99
	153	5765	14.92
	157	5785	14.94
	161	5805	14.95
	165	5825	14.93
802.11ac VHT40	151	5755	14.44
	159	5795	14.48
802.11ac VHT80	155	5775	13.95
802.11ax HE20	149	5745	14.98
	153	5765	14.95
	157	5785	14.92
	161	5805	14.92
	165	5825	14.98
802.11ax HE40	151	5755	14.44
	159	5795	14.41
802.11ax HE80	155	5775	13.92

Conducted Power (Full)_PIFA					
WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	149	5745	16.49	16.46	19.49
	153	5765	16.45	16.42	19.45
	157	5785	16.46	16.43	19.46
	161	5805	16.48	16.42	19.46
	165	5825	16.45	16.47	19.47
802.11n HT20	149	5745	14.92	14.95	17.95
	153	5765	14.95	14.92	17.95
	157	5785	14.92	14.96	17.95
	161	5805	14.94	14.93	17.95
	165	5825	14.92	14.95	17.95
802.11n HT40	151	5755	14.47	14.47	17.48
	159	5795	14.44	14.42	17.44
802.11ac VHT20	149	5745	14.98	14.99	18
	153	5765	14.97	14.98	17.99
	157	5785	14.95	14.99	17.98
	161	5805	14.92	14.95	17.95
	165	5825	14.97	14.92	17.96
802.11ac VHT40	151	5755	14.48	14.48	17.49
	159	5795	14.45	14.46	17.47
802.11ac VHT80	155	5775	13.93	13.96	16.96
802.11ax HE20	149	5745	14.95	14.96	17.97
	153	5765	14.92	14.98	17.96
	157	5785	14.98	14.98	17.99
	161	5805	14.97	14.99	17.99
	165	5825	14.95	14.93	17.95
802.11ax HE40	151	5755	14.43	14.48	17.47
	159	5795	14.47	14.48	17.49
802.11ax HE80	155	5775	13.95	13.95	16.96

Conducted Power (Full)_PIFA			
WLAN 5.9GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	169	5845	14.45
	173	5865	14.41
	177	5885	14.48
802.11n HT20	169	5845	14.43
	173	5865	14.43
	177	5885	14.46
802.11n HT40	167	5835	15.94
	175	5875	15.92
802.11ac VHT20	169	5845	14.48
	173	5865	14.42
	177	5885	14.46
802.11ac VHT40	167	5835	15.98
	175	5875	15.95
802.11ac VHT80	171	5855	16.45
802.11ac VHT160	163	5815	12.97
802.11ax HE20	169	5845	14.43
	173	5865	14.43
	177	5885	14.44
802.11ax HE40	167	5835	15.94
	175	5875	15.95
802.11ax HE80	171	5855	16.44
802.11ax HE160	163	5815	12.9

Conducted Power (Full)_PIFA			
WLAN 5.9GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	169	5845	14.49
	173	5865	14.46
	177	5885	14.45
802.11n HT20	169	5845	14.42
	173	5865	14.46
	177	5885	14.5
802.11n HT40	167	5835	15.91
	175	5875	15.98
802.11ac VHT20	169	5845	14.47
	173	5865	14.44
	177	5885	14.43
802.11ac VHT40	167	5835	15.99
	175	5875	15.94
802.11ac VHT80	171	5855	16.49
802.11ac VHT160	163	5815	12.9
802.11ax HE20	169	5845	14.44
	173	5865	14.47
	177	5885	14.43
802.11ax HE40	167	5835	15.94
	175	5875	15.96
802.11ax HE80	171	5855	16.48
802.11ax HE160	163	5815	12.97

Conducted Power (Full)_PIFA					
WLAN 5.9GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	169	5845	12.57	12.94	15.77
	173	5865	12.55	13.08	15.83
	177	5885	12.73	13.27	16.02
802.11n HT20	169	5845	14.45	14.46	17.47
	173	5865	14.48	14.4	17.45
	177	5885	14.43	14.5	17.48
802.11n HT40	167	5835	15.99	15.99	19.00
	175	5875	15.92	15.94	18.94
802.11ac VHT20	169	5845	12.95	13.28	16.13
	173	5865	12.93	13.32	16.14
	177	5885	12.86	13.36	16.13
802.11ac VHT40	167	5835	15.83	15.79	18.82
	175	5875	15.76	15.88	18.83
802.11ac VHT80	171	5855	16.12	16.48	19.31
802.11ac VHT160	163	5815	11.22	11.35	14.3
802.11ax HE20	169	5845	13.02	13.4	16.22
	173	5865	13.02	13.41	16.23
	177	5885	12.96	13.45	16.22
802.11ax HE40	167	5835	15.9	15.92	18.92
	175	5875	15.94	15.96	18.96
802.11ax HE80	171	5855	16.28	16.43	19.37
802.11ax HE160	163	5815	11.32	11.46	14.4

Conducted Power (Full)_SP_PIFA			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	2	5935	10.12
	1	5955	15.95
	5	5975	15.71
	9	5995	15.89
	13	6015	15.94
	17	6035	15.85
	21	6055	15.85
	25	6075	15.94
	29	6095	15.92
	33	6115	15.79
	37	6135	15.75
	41	6155	15.7
	45	6175	15.95
	49	6195	15.7
	53	6215	15.78
	57	6235	15.91
	61	6255	15.99
	65	6275	15.85
	69	6295	15.73
	73	6315	15.83
	77	6335	15.73
	81	6355	15.81
	85	6375	15.88
	89	6395	15.78
	93	6415	15.74
802.11ax HE20	2	5935	-5.11
	1	5955	15.88
	5	5975	15.88
	9	5995	15.84
	13	6015	15.81
	17	6035	15.91
	21	6055	15.92
	25	6075	15.77
	29	6095	15.85
	33	6115	15.86
	37	6135	15.71
	41	6155	15.86
	45	6175	15.89
	49	6195	15.85
	53	6215	15.71
	57	6235	15.92
	61	6255	15.77
	65	6275	15.85
	69	6295	15.81
	73	6315	15.83
	77	6335	15.7
	81	6355	15.95
	85	6375	15.74
	89	6395	15.85
	93	6415	15.78

Conducted Power (Full)_SP_PIFA			
802.11ax HE40	3	5965	15.28
	11	6005	15.31
	19	6045	15.29
	27	6085	15.3
	35	6125	15.32
	43	6165	15.32
	51	6205	15.2
	59	6245	15.2
	67	6285	15.24
	75	6325	15.28
	83	6365	15.21
	91	6405	15.45
802.11ax HE80	7	5985	14.79
	23	6065	14.92
	39	6145	14.75
	55	6225	14.94
	71	6305	14.89
	87	6385	14.94
802.11ax HE160	15	6025	14.28
	47	6185	14.29
	79	6345	14.25

Conducted Power (Full)_SP_PIFA			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	2	5935	10.35
	1	5955	15.88
	5	5975	15.78
	9	5995	15.95
	13	6015	15.72
	17	6035	15.78
	21	6055	15.73
	25	6075	15.81
	29	6095	15.82
	33	6115	15.88
	37	6135	15.72
	41	6155	15.78
	45	6175	15.72
	49	6195	15.85
	53	6215	15.91
	57	6235	15.89
	61	6255	15.98
	65	6275	15.92
	69	6295	15.84
	73	6315	15.71
	77	6335	15.91
	81	6355	15.94
	85	6375	15.84
	89	6395	15.95
	93	6415	15.74
802.11ax HE20	2	5935	-5.03
	1	5955	15.81
	5	5975	15.73
	9	5995	15.79
	13	6015	15.93
	17	6035	15.92
	21	6055	15.93
	25	6075	15.86
	29	6095	15.9
	33	6115	15.9
	37	6135	15.92
	41	6155	15.86
	45	6175	15.79
	49	6195	15.79
	53	6215	15.78
	57	6235	15.92
	61	6255	15.85
	65	6275	15.85
	69	6295	15.83
	73	6315	15.71
	77	6335	15.95
	81	6355	15.8
	85	6375	15.88
	89	6395	15.73
	93	6415	15.74

Conducted Power (Full)_SP_PIFA			
802.11ax HE40	3	5965	15.39
	11	6005	15.27
	19	6045	15.28
	27	6085	15.33
	35	6125	15.21
	43	6165	15.39
	51	6205	15.33
	59	6245	15.44
	67	6285	15.4
	75	6325	15.2
	83	6365	15.2
	91	6405	15.29
802.11ax HE80	7	5985	14.9
	23	6065	14.82
	39	6145	14.88
	55	6225	14.83
	71	6305	14.93
	87	6385	14.75
802.11ax HE160	15	6025	14.21
	47	6185	14.22
	79	6345	14.25

Conducted Power (Full)_SP_PIFA					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	2	5935	9.42	10.12	12.79
	1	5955	15.91	15.65	18.79
	5	5975	15.59	15.79	18.7
	9	5995	15.42	15.95	18.7
	13	6015	15.56	15.95	18.77
	17	6035	15.48	15.71	18.61
	21	6055	15.92	15.72	18.83
	25	6075	15.99	15.79	18.9
	29	6095	15.95	15.99	18.98
	33	6115	15.81	15.98	18.91
	37	6135	15.68	15.79	18.75
	41	6155	15.86	15.98	18.93
	45	6175	15.51	15.98	18.76
	49	6195	15.26	15.99	18.65
	53	6215	15.05	15.93	18.52
	57	6235	15.17	15.72	18.46
	61	6255	15.97	15.99	18.99
	65	6275	15.74	15.58	18.67
	69	6295	15.91	15.23	18.59
	73	6315	15.88	15.16	18.55
	77	6335	15.79	14.91	18.38
	81	6355	15.94	15.62	18.79
	85	6375	15.56	14.99	18.29
	89	6395	15.62	15.38	18.51
	93	6415	15.73	15.6	18.68
802.11ax HE20	2	5935	-5.6	-5.39	-2.48
	1	5955	15.74	15.73	18.75
	5	5975	15.8	15.94	18.88
	9	5995	15.75	15.86	18.82
	13	6015	15.73	15.81	18.78
	17	6035	15.86	15.78	18.83
	21	6055	15.81	15.7	18.77
	25	6075	15.76	15.84	18.81
	29	6095	15.76	15.92	18.85
	33	6115	15.78	15.89	18.85
	37	6135	15.94	15.94	18.95
	41	6155	15.84	15.76	18.81
	45	6175	15.82	15.75	18.8
	49	6195	15.87	15.73	18.81
	53	6215	15.73	15.85	18.8
	57	6235	15.89	15.72	18.82
	61	6255	15.74	15.82	18.79
	65	6275	15.92	15.89	18.92
	69	6295	15.87	15.7	18.8
	73	6315	15.83	15.73	18.79
	77	6335	15.91	15.83	18.88
	81	6355	15.88	15.92	18.91
	85	6375	15.93	15.9	18.93
	89	6395	15.94	15.85	18.91
	93	6415	15.75	15.76	18.77

Conducted Power (Full)_SP_PIFA					
802.11ax HE40	3	5965	15.22	15.2	18.22
	11	6005	15.41	15.34	18.39
	19	6045	15.38	15.25	18.33
	27	6085	15.44	15.26	18.36
	35	6125	15.4	15.4	18.41
	43	6165	15.34	15.25	18.31
	51	6205	15.44	15.21	18.34
	59	6245	15.22	15.35	18.3
	67	6285	15.2	15.39	18.31
	75	6325	15.32	15.45	18.4
	83	6365	15.43	15.41	18.43
	91	6405	15.39	15.29	18.35
802.11ax HE80	7	5985	14.87	14.72	17.81
	23	6065	14.81	14.94	17.89
	39	6145	14.74	14.86	17.81
	55	6225	14.93	14.79	17.87
	71	6305	14.73	14.7	17.73
	87	6385	14.82	14.95	17.9
	15	6025	14.4	14.43	17.43
802.11ax HE160	47	6185	14.33	14.22	17.29
	79	6345	14.26	14.38	17.33

Conducted Power (Full)_SP_PIFA			
UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	117	6535	15.63
	121	6555	15.84
	125	6575	15.66
	129	6595	15.96
	133	6615	15.75
	137	6635	15.85
	141	6655	15.86
	145	6675	15.81
	149	6695	15.7
	153	6715	15.59
	157	6735	15.59
	161	6755	15.71
	165	6775	15.6
	169	6795	15.66
	173	6815	15.6
	177	6835	15.61
	181	6855	15.57
802.11ax HE20	117	6535	15.81
	121	6555	15.75
	125	6575	15.86
	129	6595	15.82
	133	6615	15.93
	137	6635	15.93
	141	6655	15.71
	145	6675	15.82
	149	6695	15.89
	153	6715	15.81
	157	6735	15.76
	161	6755	15.92
	165	6775	15.75
	169	6795	15.74
	173	6815	15.88
	177	6835	15.84
	181	6855	15.76
802.11ax HE40	123	6565	15.45
	131	6605	15.28
	139	6645	15.4
	147	6685	15.39
	155	6725	15.24
	163	6765	15.32
	171	6805	15.28
	179	6845	15.3
802.11ax HE80	135	6625	14.78
	151	6705	14.9
	167	6785	14.93
802.11ax HE160	143	6665	14.29

Conducted Power (Full)_SP_PIFA			
UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	117	6535	15.85
	121	6555	15.98
	125	6575	15.86
	129	6595	15.98
	133	6615	15.86
	137	6635	15.7
	141	6655	15.76
	145	6675	15.89
	149	6695	15.86
	153	6715	15.75
	157	6735	15.72
	161	6755	15.91
	165	6775	15.53
	169	6795	15.56
	173	6815	15.56
	177	6835	15.73
	181	6855	15.83
802.11ax HE20	117	6535	15.95
	121	6555	15.85
	125	6575	15.79
	129	6595	15.93
	133	6615	15.81
	137	6635	15.75
	141	6655	15.95
	145	6675	15.7
	149	6695	15.8
	153	6715	15.89
	157	6735	15.8
	161	6755	15.84
	165	6775	15.79
	169	6795	15.73
	173	6815	15.72
	177	6835	15.71
	181	6855	15.8
802.11ax HE40	123	6565	15.45
	131	6605	15.43
	139	6645	15.37
	147	6685	15.24
	155	6725	15.34
	163	6765	15.27
	171	6805	15.31
	179	6845	15.25
802.11ax HE80	135	6625	14.7
	151	6705	14.79
	167	6785	14.89
802.11ax HE160	143	6665	14.35

Conducted Power (Full)_SP_PIFA					
UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	117	6535	15.75	15.35	18.56
	121	6555	15.96	15.48	18.74
	125	6575	15.78	15.86	18.83
	129	6595	15.94	15.87	18.92
	133	6615	15.87	15.36	18.63
	137	6635	15.97	15.2	18.61
	141	6655	15.98	15.26	18.65
	145	6675	15.93	15.39	18.68
	149	6695	15.82	15.36	18.61
	153	6715	15.71	15.25	18.5
	157	6735	15.71	15.22	18.48
	161	6755	15.83	15.41	18.64
	165	6775	15.72	15.63	18.69
	169	6795	15.78	15.06	18.45
	173	6815	15.72	15.06	18.41
	177	6835	15.73	15.23	18.5
	181	6855	15.69	15.33	18.52
802.11ax HE20	117	6535	15.77	15.9	18.85
	121	6555	15.81	15.91	18.87
	125	6575	15.71	15.84	18.79
	129	6595	15.8	15.72	18.77
	133	6615	15.86	15.72	18.8
	137	6635	15.85	15.74	18.81
	141	6655	15.91	15.93	18.93
	145	6675	15.71	15.86	18.8
	149	6695	15.72	15.82	18.78
	153	6715	15.93	15.95	18.95
	157	6735	15.94	15.83	18.9
	161	6755	15.87	15.84	18.87
	165	6775	15.87	15.76	18.83
	169	6795	15.91	15.77	18.85
	173	6815	15.71	15.87	18.8
	177	6835	15.95	15.88	18.93
	181	6855	15.85	15.85	18.86
802.11ax HE40	123	6565	15.37	15.27	18.33
	131	6605	15.23	15.39	18.32
	139	6645	15.2	15.2	18.21
	147	6685	15.35	15.21	18.29
	155	6725	15.42	15.21	18.33
	163	6765	15.31	15.21	18.27
	171	6805	15.31	15.21	18.27
	179	6845	15.23	15.23	18.24
802.11ax HE80	135	6625	14.74	14.85	17.81
	151	6705	14.84	14.86	17.86
	167	6785	14.75	14.94	17.86
802.11ax HE160	143	6665	14.34	14.25	17.31

Conducted Power (Full)_LPI_PIFA			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	2	5935	0.71
	1	5955	0.82
	5	5975	0.82
	9	5995	0.83
	13	6015	0.78
	17	6035	0.88
	21	6055	0.85
	25	6075	0.78
	29	6095	0.9
	33	6115	0.92
	37	6135	0.84
	41	6155	0.75
	45	6175	0.94
	49	6195	0.77
	53	6215	0.7
	57	6235	0.74
	61	6255	0.83
	65	6275	0.94
	69	6295	0.78
	73	6315	0.74
	77	6335	0.76
	81	6355	0.88
	85	6375	0.92
	89	6395	0.79
	93	6415	0.84
802.11ax HE20	2	5935	-4.62
	1	5955	0.94
	5	5975	0.8
	9	5995	0.94
	13	6015	0.91
	17	6035	0.94
	21	6055	0.75
	25	6075	0.78
	29	6095	0.71
	33	6115	0.85
	37	6135	0.93
	41	6155	0.72
	45	6175	0.85
	49	6195	0.83
	53	6215	0.91
	57	6235	0.9
	61	6255	0.77
	65	6275	0.76
	69	6295	0.79
	73	6315	0.83
	77	6335	0.87
	81	6355	0.91
	85	6375	0.74
	89	6395	0.74
	93	6415	0.92

Conducted Power (Full)_LPI_PIFA			
802.11ax HE40	3	5965	3.78
	11	6005	3.81
	19	6045	3.77
	27	6085	3.73
	35	6125	3.78
	43	6165	3.77
	51	6205	3.72
	59	6245	3.83
	67	6285	3.84
	75	6325	3.74
	83	6365	3.84
	91	6405	3.91
802.11ax HE80	7	5985	6.32
	23	6065	6.41
	39	6145	6.34
	55	6225	6.35
	71	6305	6.2
	87	6385	6.27
802.11ax HE160	15	6025	9.21
	47	6185	9.42
	79	6345	9.38

Conducted Power (Full)_LPI_PIFA			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	2	5935	0.72
	1	5955	0.92
	5	5975	0.77
	9	5995	0.86
	13	6015	0.88
	17	6035	0.92
	21	6055	0.73
	25	6075	0.92
	29	6095	0.88
	33	6115	0.72
	37	6135	0.86
	41	6155	0.73
	45	6175	0.9
	49	6195	0.79
	53	6215	0.74
	57	6235	0.82
	61	6255	0.7
	65	6275	0.85
	69	6295	0.7
	73	6315	0.76
	77	6335	0.72
	81	6355	0.92
	85	6375	0.73
	89	6395	0.84
	93	6415	0.74
802.11ax HE20	2	5935	-4.52
	1	5955	0.78
	5	5975	0.85
	9	5995	0.93
	13	6015	0.85
	17	6035	0.8
	21	6055	0.74
	25	6075	0.76
	29	6095	0.75
	33	6115	0.82
	37	6135	0.7
	41	6155	0.84
	45	6175	0.93
	49	6195	0.93
	53	6215	0.72
	57	6235	0.88
	61	6255	0.76
	65	6275	0.86
	69	6295	0.85
	73	6315	0.76
	77	6335	0.83
	81	6355	0.88
	85	6375	0.8
	89	6395	0.87
	93	6415	0.87

Conducted Power (Full)_LPI_PIFA			
802.11ax HE40	3	5965	3.91
	11	6005	3.84
	19	6045	3.78
	27	6085	3.91
	35	6125	3.89
	43	6165	3.95
	51	6205	3.94
	59	6245	3.8
	67	6285	3.76
	75	6325	3.84
	83	6365	3.89
	91	6405	3.78
802.11ax HE80	7	5985	6.39
	23	6065	6.38
	39	6145	6.29
	55	6225	6.43
	71	6305	6.43
	87	6385	6.36
802.11ax HE160	15	6025	9.23
	47	6185	9.16
	79	6345	9.36

Conducted Power (Full)_LPI_PIFA					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	2	5935	0.88	0.95	3.93
	1	5955	0.81	0.72	3.78
	5	5975	0.79	0.9	3.86
	9	5995	0.85	0.89	3.88
	13	6015	0.72	0.7	3.72
	17	6035	0.72	0.77	3.76
	21	6055	0.73	0.88	3.82
	25	6075	0.86	0.75	3.82
	29	6095	0.87	0.72	3.81
	33	6115	0.8	0.9	3.86
	37	6135	0.71	0.86	3.8
	41	6155	0.74	0.93	3.85
	45	6175	0.74	0.92	3.84
	49	6195	0.78	0.76	3.78
	53	6215	0.9	0.81	3.87
	57	6235	0.7	0.75	3.74
	61	6255	0.76	0.87	3.83
	65	6275	0.79	0.85	3.83
	69	6295	0.86	0.9	3.89
	73	6315	0.83	0.78	3.82
	77	6335	0.73	0.85	3.8
	81	6355	0.74	0.87	3.82
	85	6375	0.95	0.8	3.89
	89	6395	0.79	0.84	3.83
	93	6415	0.7	0.82	3.77
802.11ax HE20	2	5935	-4.53	-4.38	-1.44
	1	5955	0.76	0.79	3.79
	5	5975	0.82	0.9	3.87
	9	5995	0.74	0.89	3.83
	13	6015	0.94	0.95	3.96
	17	6035	0.8	0.86	3.84
	21	6055	0.82	0.88	3.86
	25	6075	0.74	0.92	3.84
	29	6095	0.92	0.82	3.88
	33	6115	0.86	0.83	3.86
	37	6135	0.74	0.92	3.84
	41	6155	0.91	0.7	3.82
	45	6175	0.76	0.79	3.79
	49	6195	0.86	0.8	3.84
	53	6215	0.71	0.85	3.79
	57	6235	0.82	0.77	3.81
	61	6255	0.92	0.8	3.87
	65	6275	0.9	0.95	3.94
	69	6295	0.71	0.71	3.72
	73	6315	0.87	0.85	3.87
	77	6335	0.76	0.92	3.85
	81	6355	0.88	0.73	3.82
	85	6375	0.83	0.74	3.8
	89	6395	0.8	0.82	3.82
	93	6415	0.87	0.79	3.84

Conducted Power (Full)_LPI_PIFA					
802.11ax HE40	3	5965	3.89	3.93	6.92
	11	6005	3.79	3.87	6.84
	19	6045	3.94	3.87	6.92
	27	6085	3.73	3.79	6.77
	35	6125	3.75	3.9	6.84
	43	6165	3.72	3.86	6.8
	51	6205	3.89	3.85	6.88
	59	6245	3.8	3.76	6.79
	67	6285	3.77	3.85	6.82
	75	6325	3.83	3.89	6.87
	83	6365	3.91	3.87	6.9
	91	6405	3.79	3.9	6.86
802.11ax HE80	7	5985	6.39	6.22	9.32
	23	6065	6.42	6.27	9.36
	39	6145	6.45	6.32	9.4
	55	6225	6.38	6.22	9.31
	71	6305	6.26	6.37	9.33
	87	6385	6.44	6.37	9.42
	15	6025	9.14	6.92	11.18
802.11ax HE160	47	6185	9.49	8.33	11.96
	79	6345	9.32	8.79	12.07

Conducted Power (Full)_LPI_PIFA			
UNII-6 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	97	6435	0.91
	101	6455	0.87
	105	6475	0.93
	109	6495	0.71
	113	6515	0.82
802.11ax HE20	97	6435	0.93
	101	6455	0.91
	105	6475	0.81
	109	6495	0.7
	113	6515	0.94
802.11ax HE40	99	6445	3.89
	107	6485	3.71
	115	6525	3.79
802.11ax HE80	103	6465	6.42
	119	6545	6.3
802.11ax HE160	111	6505	9.42

Conducted Power (Full)_LPI_PIFA			
UNII-6 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	97	6435	0.81
	101	6455	0.81
	105	6475	0.92
	109	6495	0.84
	113	6515	0.75
802.11ax HE20	97	6435	0.8
	101	6455	0.79
	105	6475	0.89
	109	6495	0.84
	113	6515	0.86
802.11ax HE40	99	6445	3.83
	107	6485	3.84
	115	6525	3.95
802.11ax HE80	103	6465	6.21
	119	6545	6.27
802.11ax HE160	111	6505	9.29

Conducted Power (Full)_LPI_PIFA					
UNII-6 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	97	6435	0.88	0.92	3.91
	101	6455	0.8	0.88	3.85
	105	6475	0.72	0.87	3.81
	109	6495	0.87	0.71	3.8
	113	6515	0.93	0.86	3.91
802.11ax HE20	97	6435	0.71	0.87	3.8
	101	6455	0.93	0.74	3.85
	105	6475	0.95	0.82	3.9
	109	6495	0.89	0.82	3.87
	113	6515	0.71	0.95	3.84
802.11ax HE40	99	6445	3.93	3.85	6.9
	107	6485	3.86	3.91	6.9
	115	6525	3.93	3.86	6.91
802.11ax HE80	103	6465	6.3	6.23	9.28
	119	6545	6.26	6.3	9.29
802.11ax HE160	111	6505	9.49	9.08	12.3

Conducted Power (Full)_LPI_PIFA			
UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	117	6535	0.87
	121	6555	0.82
	125	6575	0.82
	129	6595	0.82
	133	6615	0.75
	137	6635	0.94
	141	6655	0.86
	145	6675	0.75
	149	6695	0.77
	153	6715	0.77
	157	6735	0.93
	161	6755	0.72
	165	6775	0.77
	169	6795	0.9
	173	6815	0.95
	177	6835	0.73
	181	6855	0.79
	185	6875	0.76
802.11ax HE20	117	6535	0.91
	121	6555	0.76
	125	6575	0.71
	129	6595	0.93
	133	6615	0.87
	137	6635	0.92
	141	6655	0.94
	145	6675	0.78
	149	6695	0.84
	153	6715	0.91
	157	6735	0.93
	161	6755	0.85
	165	6775	0.92
	169	6795	0.76
	173	6815	0.72
	177	6835	0.91
	181	6855	0.87
	185	6875	0.72
802.11ax HE40	123	6565	3.87
	131	6605	3.74
	139	6645	3.93
	147	6685	3.7
	155	6725	3.9
	163	6765	3.71
	171	6805	3.79
	179	6845	3.75
	187	6885	3.93
802.11ax HE80	135	6625	6.22
	151	6705	6.23
	167	6785	6.31
	183	6865	6.2
802.11ax HE160	143	6665	9.45
	175	6825	9.31

Conducted Power (Full)_LPI_PIFA			
UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	117	6535	0.93
	121	6555	0.88
	125	6575	0.95
	129	6595	0.77
	133	6615	0.75
	137	6635	0.7
	141	6655	0.9
	145	6675	0.91
	149	6695	0.76
	153	6715	0.92
	157	6735	0.93
	161	6755	0.78
	165	6775	0.87
	169	6795	0.75
	173	6815	0.89
	177	6835	0.93
	181	6855	0.74
	185	6875	0.78
802.11ax HE20	117	6535	0.84
	121	6555	0.9
	125	6575	0.95
	129	6595	0.89
	133	6615	0.75
	137	6635	0.78
	141	6655	0.78
	145	6675	0.85
	149	6695	0.73
	153	6715	0.78
	157	6735	0.94
	161	6755	0.79
	165	6775	0.84
	169	6795	0.84
	173	6815	0.79
	177	6835	0.74
	181	6855	0.92
	185	6875	0.94
802.11ax HE40	123	6565	3.94
	131	6605	3.81
	139	6645	3.88
	147	6685	3.7
	155	6725	3.93
	163	6765	3.74
	171	6805	3.95
	179	6845	3.88
	187	6885	3.84
802.11ax HE80	135	6625	6.41
	151	6705	6.26
	167	6785	6.28
	183	6865	6.45
802.11ax HE160	143	6665	9.48
	175	6825	9.45

Conducted Power (Full)_LPI_PIFA					
UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	117	6535	0.95	0.95	3.96
	121	6555	0.81	0.73	3.78
	125	6575	0.75	0.82	3.8
	129	6595	0.84	0.82	3.84
	133	6615	0.81	0.95	3.89
	137	6635	0.85	0.82	3.85
	141	6655	0.76	0.7	3.74
	145	6675	0.83	0.77	3.81
	149	6695	0.92	0.82	3.88
	153	6715	0.86	0.84	3.86
	157	6735	0.83	0.74	3.8
	161	6755	0.71	0.87	3.8
	165	6775	0.95	0.84	3.91
	169	6795	0.7	0.94	3.83
	173	6815	0.86	0.82	3.85
	177	6835	0.81	0.76	3.8
	181	6855	0.95	0.74	3.86
	185	6875	0.92	0.73	3.84
802.11ax HE20	117	6535	0.91	0.91	3.92
	121	6555	0.86	0.83	3.86
	125	6575	0.71	0.78	3.76
	129	6595	0.87	0.92	3.91
	133	6615	0.75	0.78	3.78
	137	6635	0.87	0.77	3.83
	141	6655	0.9	0.7	3.81
	145	6675	0.74	0.91	3.84
	149	6695	0.77	0.81	3.8
	153	6715	0.87	0.84	3.87
	157	6735	0.8	0.83	3.83
	161	6755	0.93	0.77	3.86
	165	6775	0.77	0.77	3.78
	169	6795	0.79	0.7	3.76
	173	6815	0.76	0.77	3.78
	177	6835	0.83	0.87	3.86
	181	6855	0.91	0.92	3.93
	185	6875	0.86	0.72	3.8
802.11ax HE40	123	6565	3.81	3.72	6.78
	131	6605	3.7	3.9	6.81
	139	6645	3.8	3.7	6.76
	147	6685	3.86	3.72	6.8
	155	6725	3.76	3.73	6.76
	163	6765	3.86	3.87	6.88
	171	6805	3.72	3.73	6.74
	179	6845	3.76	3.8	6.79
	187	6885	3.91	3.82	6.88
802.11ax HE80	135	6625	6.23	6.21	9.23
	151	6705	6.24	6.31	9.29
	167	6785	6.36	6.22	9.3
	183	6865	6.29	6.25	9.28
802.11ax HE160	143	6665	9.48	9.12	12.31
	175	6825	9.12	8.36	11.77

Conducted Power (Full)_LPI_PIFA			
UNII-8 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	189	6895	0.79
	193	6915	0.75
	197	6935	0.94
	201	6955	0.71
	205	6975	0.82
	209	6995	0.93
	213	7015	0.85
	217	7035	0.88
	221	7055	0.81
	225	7075	0.9
	229	7095	0.91
	233	7115	0.9
802.11ax HE20	189	6895	0.75
	193	6915	0.87
	197	6935	0.8
	201	6955	0.81
	205	6975	0.73
	209	6995	0.72
	213	7015	0.86
	217	7035	0.88
	221	7055	0.77
	225	7075	0.79
	229	7095	0.76
	233	7115	-4.1
802.11ax HE40	195	6925	3.95
	203	6965	3.83
	211	7005	3.92
	219	7045	3.81
	227	7085	3.76
802.11ax HE80	199	6945	6.3
	215	7025	6.28
802.11ax HE160	207	6985	9.14

Conducted Power (Full)_LPI_PIFA			
UNII-8 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	189	6895	0.94
	193	6915	0.81
	197	6935	0.82
	201	6955	0.92
	205	6975	0.77
	209	6995	0.84
	213	7015	0.78
	217	7035	0.77
	221	7055	0.7
	225	7075	0.75
	229	7095	0.88
	233	7115	0.79
802.11ax HE20	189	6895	0.8
	193	6915	0.87
	197	6935	0.75
	201	6955	0.9
	205	6975	0.75
	209	6995	0.85
	213	7015	0.71
	217	7035	0.86
	221	7055	0.71
	225	7075	0.79
	229	7095	0.76
	233	7115	-4.3
802.11ax HE40	195	6925	3.95
	203	6965	3.83
	211	7005	3.92
	219	7045	3.72
	227	7085	3.9
802.11ax HE80	199	6945	6.21
	215	7025	6.33
802.11ax HE160	207	6985	9.46

Conducted Power (Full)_LPI_PIFA					
UNII-8 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	189	6895	0.93	0.87	3.91
	193	6915	0.94	0.89	3.93
	197	6935	0.78	0.86	3.83
	201	6955	0.77	0.91	3.85
	205	6975	0.84	0.83	3.85
	209	6995	0.76	0.79	3.79
	213	7015	0.77	0.83	3.81
	217	7035	0.93	0.74	3.85
	221	7055	0.89	0.72	3.82
	225	7075	0.8	0.81	3.82
	229	7095	0.85	0.75	3.81
	233	7115	0.83	0.74	3.8
802.11ax HE20	189	6895	0.79	0.76	3.79
	193	6915	0.78	0.78	3.79
	197	6935	0.92	0.85	3.9
	201	6955	0.83	0.79	3.82
	205	6975	0.77	0.88	3.84
	209	6995	0.93	0.72	3.84
	213	7015	0.75	0.92	3.85
	217	7035	0.73	0.76	3.76
	221	7055	0.86	0.72	3.8
	225	7075	0.73	0.7	3.73
	229	7095	0.71	0.88	3.81
	233	7115	-4.1	-4.07	-1.07
802.11ax HE40	195	6925	3.74	3.92	6.84
	203	6965	3.85	3.89	6.88
	211	7005	3.79	3.73	6.77
	219	7045	3.82	3.75	6.8
	227	7085	3.73	3.78	6.77
802.11ax HE80	199	6945	6.35	6.38	9.38
	215	7025	6.4	6.43	9.43
802.11ax HE160	207	6985	9.43	8.74	12.11

Conducted Power (Full)_Monopole			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	10.35
	6	2437	11.48
	11	2462	10.67
	12	2467	8.3
	13	2472	4.87
802.11g	1	2412	11.25
	6	2437	11.36
	11	2462	11.45
	12	2467	11.26
	13	2472	1.95
802.11n HT20	1	2412	11.17
	6	2437	11.38
	11	2462	11.25
	12	2467	11.26
	13	2472	1.95
802.11n HT40	3	2422	11.23
	6	2437	11.21
	9	2452	11.22
	10	2457	11.25
	11	2462	2.27
802.11ax HE20	1	2412	11.24
	6	2437	11.18
	11	2462	11.19
	12	2467	11.29
	13	2472	1.88
802.11ax HE40	3	2422	11.35
	6	2437	11.41
	9	2452	11.22
	10	2457	11.21
	11	2462	2.38

Conducted Power (Full)_Monopole			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	10.25
	6	2437	11.46
	11	2462	10.68
	12	2467	8.18
	13	2472	4.82
802.11g	1	2412	11.2
	6	2437	11.38
	11	2462	11.19
	12	2467	11.45
	13	2472	1.74
802.11n HT20	1	2412	11.44
	6	2437	11.34
	11	2462	11.43
	12	2467	11.3
	13	2472	1.81
802.11n HT40	3	2422	11.31
	6	2437	11.42
	9	2452	11.28
	10	2457	11.34
	11	2462	2.22
802.11ax HE20	1	2412	11.33
	6	2437	11.25
	11	2462	11.36
	12	2467	11.15
	13	2472	1.83
802.11ax HE40	3	2422	11.26
	6	2437	11.36
	9	2452	11.24
	10	2457	11.28
	11	2462	2.2

Conducted Power (Full)_ Monopole					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11b	1	2412	10.41	10.28	13.36
	6	2437	11.47	11.41	14.45
	11	2462	10.71	10.68	13.71
	12	2467	8.3	8.42	11.37
	13	2472	4.67	4.83	7.76
802.11g	1	2412	11.31	11.34	14.34
	6	2437	11.25	11.21	14.24
	11	2462	11.2	11.34	14.28
	12	2467	11.45	11.28	14.38
	13	2472	1.72	1.95	4.85
802.11n HT20	1	2412	11.32	11.18	14.26
	6	2437	11.23	11.44	14.35
	11	2462	11.42	11.36	14.40
	12	2467	11.45	11.41	14.44
	13	2472	1.65	1.75	4.71
802.11n HT40	3	2422	11.33	11.41	14.38
	6	2437	11.34	11.38	14.37
	9	2452	11.38	11.19	14.30
	10	2457	11.28	11.22	14.26
	11	2462	2.15	2.3	5.24
802.11ax HE20	1	2412	11.39	11.33	14.37
	6	2437	11.17	11.39	14.29
	11	2462	11.33	11.38	14.37
	12	2467	11.2	11.22	14.22
	13	2472	1.69	1.75	4.73
802.11ax HE40	3	2422	11.34	11.44	14.40
	6	2437	11.22	11.42	14.33
	9	2452	11.15	11.41	14.29
	10	2457	11.39	11.35	14.38
	11	2462	2.36	2.25	5.32

Conducted Power (Full)_Monopole			
Bluetooth Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
BR / EDR	0	2402	14.41
	39	2441	14.28
	78	2480	14.35
LE	0	2402	6.74
	19	2440	6.57
	39	2480	6.81

Conducted Power (Full)_Monopole			
WLAN 5.2GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	36	5180	13.24
	40	5200	13.23
	44	5220	13.19
	48	5240	13.22
802.11n HT20	36	5180	13.92
	40	5200	13.82
	44	5220	13.71
	48	5240	13.83
802.11n HT40	38	5190	14.21
	46	5230	14.48
802.11ac VHT20	36	5180	13.66
	40	5200	13.77
	44	5220	13.89
	48	5240	13.79
802.11ac VHT40	38	5190	14.42
	46	5230	14.21
802.11ac VHT80	42	5210	13.9
802.11ax HE20	36	5180	13.95
	40	5200	13.95
	44	5220	13.82
	48	5240	13.87
802.11ax HE40	38	5190	14.31
	46	5230	14.38
802.11ax HE80	42	5210	13.89

Conducted Power (Full)_Monopole			
WLAN 5.2GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	36	5180	13.29
	40	5200	13.29
	44	5220	13.16
	48	5240	13.38
802.11n HT20	36	5180	13.69
	40	5200	13.8
	44	5220	13.75
	48	5240	13.92
802.11n HT40	38	5190	14.24
	46	5230	14.37
802.11ac VHT20	36	5180	13.92
	40	5200	13.67
	44	5220	13.73
	48	5240	13.83
802.11ac VHT40	38	5190	14.24
	46	5230	14.27
802.11ac VHT80	42	5210	13.79
802.11ax HE20	36	5180	13.71
	40	5200	13.85
	44	5220	13.86
	48	5240	13.93
802.11ax HE40	38	5190	14.31
	46	5230	14.25
802.11ax HE80	42	5210	13.8

Conducted Power (Full)_Monopole					
WLAN 5.2GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	36	5180	13.44	13.39	16.43
	40	5200	13.2	13.33	16.28
	44	5220	13.36	13.18	16.28
	48	5240	13.22	13.38	16.31
802.11n HT20	36	5180	13.84	13.93	16.9
	40	5200	13.88	13.85	16.88
	44	5220	13.87	13.95	16.92
	48	5240	13.68	13.72	16.71
802.11n HT40	38	5190	14.28	14.4	17.35
	46	5230	14.44	14.4	17.43
802.11ac VHT20	36	5180	13.7	13.76	16.74
	40	5200	13.95	13.82	16.9
	44	5220	13.71	13.69	16.71
	48	5240	13.73	13.89	16.82
802.11ac VHT40	38	5190	14.22	14.28	17.26
	46	5230	14.25	14.18	17.23
802.11ac VHT80	42	5210	13.83	13.89	16.87
802.11ax HE20	36	5180	13.74	13.93	16.85
	40	5200	13.76	13.82	16.8
	44	5220	13.71	13.7	16.72
	48	5240	13.88	13.73	16.82
802.11ax HE40	38	5190	14.37	14.31	17.35
	46	5230	14.25	14.26	17.27
802.11ax HE80	42	5210	13.89	13.7	16.81

Conducted Power (Full)_Monopole			
WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	52	5260	14.42
	56	5280	14.49
	60	5300	14.26
	64	5320	13.65
802.11n HT20	52	5260	12.95
	56	5280	12.82
	60	5300	12.81
	64	5320	12.95
802.11n HT40	54	5270	12.35
	62	5310	11.78
802.11ac VHT20	52	5260	12.68
	56	5280	12.86
	60	5300	12.74
	64	5320	12.78
802.11ac VHT40	54	5270	12.29
	62	5310	11.75
802.11ac VHT80	58	5290	9.31
802.11ac VHT160	50	5250	9.39
802.11ax HE20	52	5260	12.75
	56	5280	12.72
	60	5300	12.88
	64	5320	12.93
802.11ax HE40	54	5270	12.34
	62	5310	11.9
802.11ax HE80	58	5290	9.22
802.11ax HE160	50	5250	9.22

Conducted Power (Full)_Monopole			
WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	52	5260	14.32
	56	5280	14.45
	60	5300	14.41
	64	5320	13.92
802.11n HT20	52	5260	12.69
	56	5280	12.83
	60	5300	12.86
	64	5320	12.85
802.11n HT40	54	5270	12.23
	62	5310	11.94
802.11ac VHT20	52	5260	12.95
	56	5280	12.71
	60	5300	12.89
	64	5320	12.9
802.11ac VHT40	54	5270	12.3
	62	5310	11.92
802.11ac VHT80	58	5290	9.24
802.11ac VHT160	50	5250	9.29
802.11ax HE20	52	5260	12.65
	56	5280	12.65
	60	5300	12.84
	64	5320	12.88
802.11ax HE40	54	5270	12.23
	62	5310	11.67
802.11ax HE80	58	5290	9.33
802.11ax HE160	50	5250	9.32

Conducted Power (Full)_Monopole					
WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	52	5260	14.15	14.19	17.18
	56	5280	14.47	14.45	17.47
	60	5300	14.35	14.21	17.29
	64	5320	13.76	13.86	16.82
802.11n HT20	52	5260	12.8	12.65	15.74
	56	5280	12.93	12.76	15.86
	60	5300	12.65	12.89	15.78
	64	5320	12.68	12.68	15.69
802.11n HT40	54	5270	12.31	12.39	15.36
	62	5310	11.84	11.94	14.9
802.11ac VHT20	52	5260	12.94	12.82	15.89
	56	5280	12.69	12.85	15.78
	60	5300	12.73	12.68	15.72
	64	5320	12.67	12.73	15.71
802.11ac VHT40	54	5270	12.18	12.43	15.32
	62	5310	11.85	11.92	14.9
802.11ac VHT80	58	5290	9.26	9.2	12.24
802.11ac VHT160	50	5250	9.35	9.38	12.38
802.11ax HE20	52	5260	12.8	12.83	15.83
	56	5280	12.93	12.78	15.87
	60	5300	12.76	12.7	15.74
	64	5320	12.85	12.77	15.82
802.11ax HE40	54	5270	12.22	12.45	15.35
	62	5310	11.88	11.92	14.91
802.11ax HE80	58	5290	9.34	9.41	12.39
802.11ax HE160	50	5250	9.32	9.42	12.38

Conducted Power (Full)_Monopole			
WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	100	5500	13.19
	116	5580	14.47
	120	5600	14.43
	124	5620	14.25
	132	5660	14.19
	140	5700	12.33
	144	5720	14.28
802.11n HT20	100	5500	11.65
	116	5580	12.95
	120	5600	12.9
	124	5620	12.87
	132	5660	12.66
	140	5700	11.73
	144	5720	12.8
802.11n HT40	102	5510	11.18
	110	5550	12.44
	118	5590	12.36
	126	5630	12.26
	134	5670	12.16
	142	5710	12.36
802.11ac VHT20	100	5500	11.73
	116	5580	12.8
	120	5600	12.89
	124	5620	12.75
	132	5660	12.75
	140	5700	11.91
	144	5720	12.83
802.11ac VHT40	102	5510	11.45
	110	5550	12.45
	118	5590	12.28
	126	5630	12.22
	134	5670	12.2
	142	5710	12.39
802.11ac VHT80	106	5530	10.8
	122	5610	11.76
	138	5690	11.92
802.11ac VHT160	114	5570	10.31
802.11ax HE20	100	5500	11.7
	116	5580	12.67
	120	5600	12.75
	124	5620	12.86
	132	5660	12.82
	140	5700	11.8
	144	5720	12.88
802.11ax HE40	102	5510	11.19
	110	5550	12.28
	118	5590	12.35
	126	5630	12.15
	134	5670	12.44
	142	5710	12.17

Conducted Power (Full)_Monopole			
802.11ax HE80	106	5530	10.7
	122	5610	11.8
	138	5690	11.67
802.11ax HE160	114	5570	10.26

Conducted Power (Full)_Monopole			
WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	100	5500	13.31
	116	5580	14.44
	120	5600	14.15
	124	5620	14.2
	132	5660	14.19
	140	5700	12.45
	144	5720	14.2
802.11n HT20	100	5500	11.69
	116	5580	12.92
	120	5600	12.84
	124	5620	12.66
	132	5660	12.85
	140	5700	11.7
	144	5720	12.94
802.11n HT40	102	5510	11.24
	110	5550	12.44
	118	5590	12.18
	126	5630	12.37
	134	5670	12.26
	142	5710	12.44
802.11ac VHT20	100	5500	11.72
	116	5580	12.84
	120	5600	12.91
	124	5620	12.69
	132	5660	12.8
	140	5700	11.91
	144	5720	12.85
802.11ac VHT40	102	5510	11.41
	110	5550	12.25
	118	5590	12.32
	126	5630	12.19
	134	5670	12.45
	142	5710	12.36
802.11ac VHT80	106	5530	10.77
	122	5610	11.95
	138	5690	11.73
802.11ac VHT160	114	5570	10.2
802.11ax HE20	100	5500	11.65
	116	5580	12.93
	120	5600	12.79
	124	5620	12.81
	132	5660	12.82
	140	5700	11.92
	144	5720	12.91
802.11ax HE40	102	5510	11.39
	110	5550	12.27
	118	5590	12.44
	126	5630	12.17
	134	5670	12.26
	142	5710	12.45

Conducted Power (Full)_Monopole			
802.11ax HE80	106	5530	10.86
	122	5610	11.95
	138	5690	11.68
802.11ax HE160	114	5570	10.39

Conducted Power (Full)_ Monopole					
WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	100	5500	13.22	13.34	16.29
	116	5580	14.48	14.47	17.49
	120	5600	14.29	14.25	17.28
	124	5620	14.29	14.44	17.38
	132	5660	14.21	14.31	17.27
	140	5700	12.41	12.31	15.37
	144	5720	14.23	14.28	17.27
802.11n HT20	100	5500	11.94	11.83	14.9
	116	5580	12.82	12.72	15.78
	120	5600	12.78	12.92	15.86
	124	5620	12.88	12.65	15.78
	132	5660	12.77	12.89	15.84
	140	5700	11.68	11.9	14.8
	144	5720	12.87	12.77	15.83
802.11n HT40	102	5510	11.32	11.36	14.35
	110	5550	12.36	12.23	15.31
	118	5590	12.39	12.19	15.3
	126	5630	12.31	12.23	15.28
	134	5670	12.3	12.35	15.34
	142	5710	12.43	12.42	15.44
802.11ac VHT20	100	5500	11.77	11.68	14.74
	116	5580	12.71	12.66	15.7
	120	5600	12.78	12.9	15.85
	124	5620	12.69	12.78	15.75
	132	5660	12.73	12.93	15.84
	140	5700	11.76	11.93	14.86
	144	5720	12.72	12.65	15.7
802.11ac VHT40	102	5510	11.24	11.16	14.21
	110	5550	12.19	12.42	15.32
	118	5590	12.34	12.24	15.3
	126	5630	12.25	12.3	15.29
	134	5670	12.44	12.16	15.31
	142	5710	12.39	12.38	15.4
802.11ac VHT80	106	5530	10.69	10.68	13.7
	122	5610	11.68	11.78	14.74
	138	5690	11.94	11.75	14.86
802.11ac VHT160	114	5570	10.18	10.15	13.18
802.11ax HE20	100	5500	11.78	11.75	14.78
	116	5580	12.91	12.9	15.92
	120	5600	12.71	12.94	15.84
	124	5620	12.84	12.71	15.79
	132	5660	12.66	12.76	15.72
	140	5700	11.93	11.85	14.9
	144	5720	12.65	12.66	15.67
802.11ax HE40	102	5510	11.17	11.22	14.21
	110	5550	12.37	12.33	15.36
	118	5590	12.33	12.19	15.27
	126	5630	12.4	12.25	15.34
	134	5670	12.17	12.2	15.2
	142	5710	12.19	12.21	15.21

Conducted Power (Full)_Monopole					
802.11ax HE80	106	5530	10.66	10.89	13.79
	122	5610	11.69	11.82	14.77
	138	5690	11.87	11.9	14.9
802.11ax HE160	114	5570	10.39	10.28	13.35

Conducted Power (Full)_Monopole			
WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	149	5745	14.48
	153	5765	14.19
	157	5785	14.43
	161	5805	14.18
	165	5825	14.25
802.11n HT20	149	5745	12.69
	153	5765	12.82
	157	5785	12.7
	161	5805	12.75
	165	5825	12.75
802.11n HT40	151	5755	12.44
	159	5795	12.25
802.11ac VHT20	149	5745	12.95
	153	5765	12.89
	157	5785	12.83
	161	5805	12.95
	165	5825	12.83
802.11ac VHT40	151	5755	12.27
	159	5795	12.41
802.11ac VHT80	155	5775	11.83
802.11ax HE20	149	5745	12.84
	153	5765	12.7
	157	5785	12.88
	161	5805	12.95
	165	5825	12.93
802.11ax HE40	151	5755	12.3
	159	5795	12.31
802.11ax HE80	155	5775	11.74

Conducted Power (Full)_Monopole			
WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	149	5745	14.48
	153	5765	14.35
	157	5785	14.43
	161	5805	14.15
	165	5825	14.4
802.11n HT20	149	5745	12.68
	153	5765	12.77
	157	5785	12.91
	161	5805	12.67
	165	5825	12.76
802.11n HT40	151	5755	12.4
	159	5795	12.27
802.11ac VHT20	149	5745	12.75
	153	5765	12.93
	157	5785	12.74
	161	5805	12.9
	165	5825	12.79
802.11ac VHT40	151	5755	12.45
	159	5795	12.18
802.11ac VHT80	155	5775	11.85
802.11ax HE20	149	5745	12.8
	153	5765	12.7
	157	5785	12.75
	161	5805	12.94
	165	5825	12.87
802.11ax HE40	151	5755	12.44
	159	5795	12.15
802.11ax HE80	155	5775	11.74

Conducted Power (Full)_Monopole					
WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	149	5745	14.48	14.47	17.49
	153	5765	14.39	14.18	17.3
	157	5785	14.35	14.31	17.34
	161	5805	14.42	14.44	17.44
	165	5825	14.31	14.37	17.35
802.11n HT20	149	5745	12.88	12.78	15.84
	153	5765	12.9	12.65	15.79
	157	5785	12.91	12.87	15.9
	161	5805	12.69	12.71	15.71
	165	5825	12.93	12.71	15.83
802.11n HT40	151	5755	12.21	12.34	15.29
	159	5795	12.29	12.38	15.35
802.11ac VHT20	149	5745	12.87	12.69	15.79
	153	5765	12.83	12.72	15.79
	157	5785	12.86	12.67	15.78
	161	5805	12.86	12.79	15.84
	165	5825	12.74	12.83	15.8
802.11ac VHT40	151	5755	12.33	12.24	15.3
	159	5795	12.18	12.4	15.3
802.11ac VHT80	155	5775	11.76	11.83	14.81
802.11ax HE20	149	5745	12.69	12.72	15.72
	153	5765	12.76	12.94	15.86
	157	5785	12.9	12.89	15.91
	161	5805	12.83	12.89	15.87
	165	5825	12.77	12.82	15.81
802.11ax HE40	151	5755	12.4	12.41	15.42
	159	5795	12.45	12.19	15.33
802.11ax HE80	155	5775	11.85	11.95	14.91

Conducted Power (Full)_Monopole			
WLAN 5.9GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	169	5845	12.39
	173	5865	12.3
	177	5885	12.39
802.11n HT20	169	5845	12.39
	173	5865	12.35
	177	5885	12.4
802.11n HT40	167	5835	13.8
	175	5875	13.94
802.11ac VHT20	169	5845	12.29
	173	5865	12.32
	177	5885	12.4
802.11ac VHT40	167	5835	13.79
	175	5875	13.71
802.11ac VHT80	171	5855	14.43
802.11ac VHT160	163	5815	10.95
802.11ax HE20	169	5845	12.23
	173	5865	12.3
	177	5885	12.34
802.11ax HE40	167	5835	13.66
	175	5875	13.9
802.11ax HE80	171	5855	14.45
802.11ax HE160	163	5815	10.84

Conducted Power (Full)_Monopole			
WLAN 5.9GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	169	5845	12.21
	173	5865	12.2
	177	5885	12.38
802.11n HT20	169	5845	12.16
	173	5865	12.32
	177	5885	12.25
802.11n HT40	167	5835	13.69
	175	5875	13.9
802.11ac VHT20	169	5845	12.35
	173	5865	12.29
	177	5885	12.43
802.11ac VHT40	167	5835	13.65
	175	5875	13.91
802.11ac VHT80	171	5855	14.45
802.11ac VHT160	163	5815	10.87
802.11ax HE20	169	5845	12.36
	173	5865	12.33
	177	5885	12.32
802.11ax HE40	167	5835	13.68
	175	5875	13.9
802.11ax HE80	171	5855	14.23
802.11ax HE160	163	5815	10.68

Conducted Power (Full)_Monopole					
WLAN 5.9GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	169	5845	12.43	12.38	15.42
	173	5865	12.33	12.29	15.32
	177	5885	12.42	12.22	15.33
802.11n HT20	169	5845	12.39	12.21	15.31
	173	5865	12.18	12.36	15.28
	177	5885	12.29	12.15	15.23
802.11n HT40	167	5835	13.68	13.89	16.8
	175	5875	13.81	13.84	16.84
802.11ac VHT20	169	5845	12.4	12.22	15.32
	173	5865	12.38	12.35	15.38
	177	5885	12.25	12.27	15.27
802.11ac VHT40	167	5835	13.83	13.74	16.8
	175	5875	13.9	13.67	16.8
802.11ac VHT80	171	5855	14.46	14.49	17.49
802.11ac VHT160	163	5815	10.67	10.85	13.77
802.11ax HE20	169	5845	12.32	12.28	15.31
	173	5865	12.42	12.31	15.38
	177	5885	12.37	12.15	15.27
802.11ax HE40	167	5835	13.69	13.82	16.77
	175	5875	13.89	13.9	16.91
802.11ax HE80	171	5855	14.17	14.42	17.31
802.11ax HE160	163	5815	10.68	10.89	13.8

Conducted Power (Full)_SP_Monopole			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	2	5935	7.73
	1	5955	13.19
	5	5975	13.37
	9	5995	13.36
	13	6015	13.41
	17	6035	13.36
	21	6055	13.2
	25	6075	13.43
	29	6095	13.35
	33	6115	13.15
	37	6135	13.36
	41	6155	13.33
	45	6175	13.38
	49	6195	13.24
	53	6215	13.37
	57	6235	13.32
	61	6255	13.49
	65	6275	13.41
	69	6295	13.35
	73	6315	13.36
	77	6335	13.16
	81	6355	13.24
	85	6375	13.39
	89	6395	13.29
	93	6415	13.29
802.11ax HE20	2	5935	-7.57
	1	5955	13.45
	5	5975	13.21
	9	5995	13.22
	13	6015	13.31
	17	6035	13.37
	21	6055	13.35
	25	6075	13.21
	29	6095	13.28
	33	6115	13.29
	37	6135	13.16
	41	6155	13.44
	45	6175	13.33
	49	6195	13.23
	53	6215	13.31
	57	6235	13.24
	61	6255	13.36
	65	6275	13.16
	69	6295	13.19
	73	6315	13.33
	77	6335	13.34
	81	6355	13.37
	85	6375	13.35
	89	6395	13.24
	93	6415	13.25

Conducted Power (Full)_SP_Monopole			
802.11ax HE40	3	5965	12.91
	11	6005	12.86
	19	6045	12.78
	27	6085	12.66
	35	6125	12.77
	43	6165	12.66
	51	6205	12.73
	59	6245	12.66
	67	6285	12.81
	75	6325	12.89
	83	6365	12.86
	91	6405	12.81
802.11ax HE80	7	5985	12.43
	23	6065	12.21
	39	6145	12.38
	55	6225	12.42
	71	6305	12.42
	87	6385	12.45
802.11ax HE160	15	6025	11.77
	47	6185	11.72
	79	6345	11.81

Conducted Power (Full)_SP_Monopole			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	2	5935	7.7
	1	5955	13.39
	5	5975	13.33
	9	5995	13.17
	13	6015	13.34
	17	6035	13.37
	21	6055	13.43
	25	6075	13.39
	29	6095	13.26
	33	6115	13.34
	37	6135	13.45
	41	6155	13.15
	45	6175	13.39
	49	6195	13.22
	53	6215	13.37
	57	6235	13.35
	61	6255	13.48
	65	6275	13.17
	69	6295	13.2
	73	6315	13.29
	77	6335	13.41
	81	6355	13.2
	85	6375	13.23
	89	6395	13.34
	93	6415	13.37
802.11ax HE20	2	5935	-7.7
	1	5955	13.21
	5	5975	13.41
	9	5995	13.17
	13	6015	13.41
	17	6035	13.33
	21	6055	13.35
	25	6075	13.32
	29	6095	13.41
	33	6115	13.38
	37	6135	13.15
	41	6155	13.18
	45	6175	13.42
	49	6195	13.16
	53	6215	13.31
	57	6235	13.25
	61	6255	13.2
	65	6275	13.34
	69	6295	13.18
	73	6315	13.45
	77	6335	13.37
	81	6355	13.43
	85	6375	13.24
	89	6395	13.43
	93	6415	13.45

Conducted Power (Full)_SP_Monopole			
802.11ax HE40	3	5965	12.94
	11	6005	12.71
	19	6045	12.9
	27	6085	12.67
	35	6125	12.69
	43	6165	12.72
	51	6205	12.86
	59	6245	12.81
	67	6285	12.66
	75	6325	12.91
	83	6365	12.82
	91	6405	12.72
802.11ax HE80	7	5985	12.32
	23	6065	12.23
	39	6145	12.26
	55	6225	12.41
	71	6305	12.2
	87	6385	12.4
	15	6025	11.95
802.11ax HE160	47	6185	11.77
	79	6345	11.83

Conducted Power (Full)_SP_Monopole					
802.11ax HE40	3	5965	12.93	12.64	15.8
	11	6005	12.93	12.51	15.74
	19	6045	12.86	12.47	15.68
	27	6085	12.81	12.41	15.62
	35	6125	12.94	12.66	15.81
	43	6165	12.94	12.52	15.75
	51	6205	12.78	12.39	15.6
	59	6245	12.85	12.63	15.75
	67	6285	12.93	12.69	15.82
	75	6325	12.74	12.49	15.63
	83	6365	12.65	12.64	15.66
	91	6405	12.78	12.67	15.74
802.11ax HE80	7	5985	12.37	12.18	15.29
	23	6065	12.24	12.1	15.18
	39	6145	12.3	12.16	15.24
	55	6225	12.41	12.28	15.36
	71	6305	12.24	12.21	15.24
	87	6385	12.15	11.98	15.08
	15	6025	11.83	11.45	14.65
802.11ax HE160	47	6185	11.65	11.49	14.58
	79	6345	11.91	11.82	14.88

Conducted Power (Full)_SP_Monopole			
UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	117	6535	13.41
	121	6555	13.42
	125	6575	13.34
	129	6595	13.45
	133	6615	13.27
	137	6635	13.15
	141	6655	13.18
	145	6675	13.31
	149	6695	13.32
	153	6715	13.4
	157	6735	13.25
	161	6755	13.27
	165	6775	13.41
	169	6795	13.26
	173	6815	13.4
	177	6835	13.36
	181	6855	13.45
802.11ax HE20	117	6535	13.34
	121	6555	13.41
	125	6575	13.38
	129	6595	13.18
	133	6615	13.28
	137	6635	13.25
	141	6655	13.23
	145	6675	13.37
	149	6695	13.28
	153	6715	13.26
	157	6735	13.15
	161	6755	13.34
	165	6775	13.23
	169	6795	13.41
	173	6815	13.16
	177	6835	13.25
	181	6855	13.44
802.11ax HE40	123	6565	12.89
	131	6605	12.83
	139	6645	12.81
	147	6685	12.69
	155	6725	12.7
	163	6765	12.83
	171	6805	12.76
	179	6845	12.67
802.11ax HE80	135	6625	12.42
	151	6705	12.31
	167	6785	12.16
802.11ax HE160	143	6665	11.81

Conducted Power (Full)_SP_Monopole			
UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	117	6535	13.37
	121	6555	13.44
	125	6575	13.24
	129	6595	13.46
	133	6615	13.28
	137	6635	13.33
	141	6655	13.42
	145	6675	13.32
	149	6695	13.28
	153	6715	13.45
	157	6735	13.2
	161	6755	13.31
	165	6775	13.18
	169	6795	13.37
	173	6815	13.33
	177	6835	13.32
	181	6855	13.15
802.11ax HE20	117	6535	13.42
	121	6555	13.28
	125	6575	13.45
	129	6595	13.22
	133	6615	13.35
	137	6635	13.22
	141	6655	13.25
	145	6675	13.42
	149	6695	13.19
	153	6715	13.35
	157	6735	13.29
	161	6755	13.37
	165	6775	13.22
	169	6795	13.37
	173	6815	13.19
	177	6835	13.29
	181	6855	13.33
802.11ax HE40	123	6565	12.69
	131	6605	12.85
	139	6645	12.68
	147	6685	12.7
	155	6725	12.83
	163	6765	12.77
	171	6805	12.83
	179	6845	12.67
802.11ax HE80	135	6625	12.37
	151	6705	12.32
	167	6785	12.33
802.11ax HE160	143	6665	11.88

Conducted Power (Full)_SP_Monopole					
UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	117	6535	13.26	13.13	16.21
	121	6555	13.44	13.29	16.38
	125	6575	13.33	13.11	16.23
	129	6595	13.38	13.25	16.33
	133	6615	13.43	13.26	16.36
	137	6635	13.35	13.11	16.24
	141	6655	13.33	13.08	16.22
	145	6675	13.28	13.01	16.16
	149	6695	13.43	13.15	16.3
	153	6715	13.26	13.04	16.16
	157	6735	13.25	13.1	16.19
	161	6755	13.39	13.17	16.29
	165	6775	13.24	12.94	16.1
	169	6795	13.43	13.32	16.39
	173	6815	13.27	13.01	16.15
	177	6835	13.28	13.09	16.2
	181	6855	13.17	13.06	16.13
802.11ax HE20	117	6535	13.24	12.95	16.11
	121	6555	13.4	13.3	16.36
	125	6575	13.2	12.97	16.1
	129	6595	13.26	13.12	16.2
	133	6615	13.19	13.01	16.11
	137	6635	13.45	13.31	16.39
	141	6655	13.35	13.19	16.28
	145	6675	13.33	13.05	16.2
	149	6695	13.41	13.31	16.37
	153	6715	13.23	13.03	16.14
	157	6735	13.35	13.15	16.26
	161	6755	13.22	13.03	16.14
	165	6775	13.41	13.31	16.37
	169	6795	13.21	13.08	16.16
	173	6815	13.36	13.17	16.28
	177	6835	13.34	13.07	16.22
	181	6855	13.18	13.09	16.15
802.11ax HE40	123	6565	12.72	12.52	15.63
	131	6605	12.73	12.5	15.63
	139	6645	12.71	12.47	15.6
	147	6685	12.67	12.44	15.57
	155	6725	12.72	12.63	15.69
	163	6765	12.74	12.5	15.63
	171	6805	12.89	12.7	15.81
	179	6845	12.7	12.52	15.62
802.11ax HE80	135	6625	12.22	11.92	15.08
	151	6705	12.34	12.23	15.3
	167	6785	12.21	12.02	15.13
802.11ax HE160	143	6665	11.76	11.68	14.73

Conducted Power (Full)_LPI_Monopole			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	2	5935	0.71
	1	5955	0.82
	5	5975	0.82
	9	5995	0.83
	13	6015	0.78
	17	6035	0.88
	21	6055	0.85
	25	6075	0.78
	29	6095	0.9
	33	6115	0.92
	37	6135	0.84
	41	6155	0.75
	45	6175	0.94
	49	6195	0.77
	53	6215	0.7
	57	6235	0.74
	61	6255	0.83
	65	6275	0.94
	69	6295	0.78
	73	6315	0.74
	77	6335	0.76
	81	6355	0.88
	85	6375	0.92
	89	6395	0.79
	93	6415	0.84
802.11ax HE20	2	5935	-4.62
	1	5955	0.94
	5	5975	0.8
	9	5995	0.94
	13	6015	0.91
	17	6035	0.94
	21	6055	0.75
	25	6075	0.78
	29	6095	0.71
	33	6115	0.85
	37	6135	0.93
	41	6155	0.72
	45	6175	0.85
	49	6195	0.83
	53	6215	0.91
	57	6235	0.9
	61	6255	0.77
	65	6275	0.76
	69	6295	0.79
	73	6315	0.83
	77	6335	0.87
	81	6355	0.91
	85	6375	0.74
	89	6395	0.74
	93	6415	0.92

Conducted Power (Full)_LPI_Monopole			
802.11ax HE40	3	5965	3.78
	11	6005	3.81
	19	6045	3.77
	27	6085	3.73
	35	6125	3.78
	43	6165	3.77
	51	6205	3.72
	59	6245	3.83
	67	6285	3.84
	75	6325	3.74
	83	6365	3.84
	91	6405	3.91
802.11ax HE80	7	5985	6.32
	23	6065	6.41
	39	6145	6.34
	55	6225	6.35
	71	6305	6.2
	87	6385	6.27
802.11ax HE160	15	6025	9.21
	47	6185	9.42
	79	6345	9.38

Conducted Power (Full)_LPI_Monopole			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	2	5935	0.72
	1	5955	0.92
	5	5975	0.77
	9	5995	0.86
	13	6015	0.88
	17	6035	0.92
	21	6055	0.73
	25	6075	0.92
	29	6095	0.88
	33	6115	0.72
	37	6135	0.86
	41	6155	0.73
	45	6175	0.9
	49	6195	0.79
	53	6215	0.74
	57	6235	0.82
	61	6255	0.7
	65	6275	0.85
	69	6295	0.7
	73	6315	0.76
	77	6335	0.72
	81	6355	0.92
	85	6375	0.73
	89	6395	0.84
	93	6415	0.74
802.11ax HE20	2	5935	-4.52
	1	5955	0.78
	5	5975	0.85
	9	5995	0.93
	13	6015	0.85
	17	6035	0.8
	21	6055	0.74
	25	6075	0.76
	29	6095	0.75
	33	6115	0.82
	37	6135	0.7
	41	6155	0.84
	45	6175	0.93
	49	6195	0.93
	53	6215	0.72
	57	6235	0.88
	61	6255	0.76
	65	6275	0.86
	69	6295	0.85
	73	6315	0.76
	77	6335	0.83
	81	6355	0.88
	85	6375	0.8
	89	6395	0.87
	93	6415	0.87

Conducted Power (Full)_LPI_Monopole			
802.11ax HE40	3	5965	3.91
	11	6005	3.84
	19	6045	3.78
	27	6085	3.91
	35	6125	3.89
	43	6165	3.95
	51	6205	3.94
	59	6245	3.8
	67	6285	3.76
	75	6325	3.84
	83	6365	3.89
	91	6405	3.78
802.11ax HE80	7	5985	6.39
	23	6065	6.38
	39	6145	6.29
	55	6225	6.43
	71	6305	6.43
	87	6385	6.36
802.11ax HE160	15	6025	9.23
	47	6185	9.16
	79	6345	9.36

Conducted Power (Full)_LPI_Monopole					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	2	5935	0.88	0.95	3.93
	1	5955	0.81	0.72	3.78
	5	5975	0.79	0.9	3.86
	9	5995	0.85	0.89	3.88
	13	6015	0.72	0.7	3.72
	17	6035	0.72	0.77	3.76
	21	6055	0.73	0.88	3.82
	25	6075	0.86	0.75	3.82
	29	6095	0.87	0.72	3.81
	33	6115	0.8	0.9	3.86
	37	6135	0.71	0.86	3.8
	41	6155	0.74	0.93	3.85
	45	6175	0.74	0.92	3.84
	49	6195	0.78	0.76	3.78
	53	6215	0.9	0.81	3.87
	57	6235	0.7	0.75	3.74
	61	6255	0.76	0.87	3.83
	65	6275	0.79	0.85	3.83
	69	6295	0.86	0.9	3.89
	73	6315	0.83	0.78	3.82
	77	6335	0.73	0.85	3.8
	81	6355	0.74	0.87	3.82
	85	6375	0.95	0.8	3.89
	89	6395	0.79	0.84	3.83
	93	6415	0.7	0.82	3.77
802.11ax HE20	2	5935	-4.53	-4.38	-1.44
	1	5955	0.76	0.79	3.79
	5	5975	0.82	0.9	3.87
	9	5995	0.74	0.89	3.83
	13	6015	0.94	0.95	3.96
	17	6035	0.8	0.86	3.84
	21	6055	0.82	0.88	3.86
	25	6075	0.74	0.92	3.84
	29	6095	0.92	0.82	3.88
	33	6115	0.86	0.83	3.86
	37	6135	0.74	0.92	3.84
	41	6155	0.91	0.7	3.82
	45	6175	0.76	0.79	3.79
	49	6195	0.86	0.8	3.84
	53	6215	0.71	0.85	3.79
	57	6235	0.82	0.77	3.81
	61	6255	0.92	0.8	3.87
	65	6275	0.9	0.95	3.94
	69	6295	0.71	0.71	3.72
	73	6315	0.87	0.85	3.87
	77	6335	0.76	0.92	3.85
	81	6355	0.88	0.73	3.82
	85	6375	0.83	0.74	3.8
	89	6395	0.8	0.82	3.82
	93	6415	0.87	0.79	3.84

Conducted Power (Full)_LPI_Monopole					
802.11ax HE40	3	5965	3.89	3.93	6.92
	11	6005	3.79	3.87	6.84
	19	6045	3.94	3.87	6.92
	27	6085	3.73	3.79	6.77
	35	6125	3.75	3.9	6.84
	43	6165	3.72	3.86	6.8
	51	6205	3.89	3.85	6.88
	59	6245	3.8	3.76	6.79
	67	6285	3.77	3.85	6.82
	75	6325	3.83	3.89	6.87
	83	6365	3.91	3.87	6.9
	91	6405	3.79	3.9	6.86
802.11ax HE80	7	5985	6.39	6.22	9.32
	23	6065	6.42	6.27	9.36
	39	6145	6.45	6.32	9.4
	55	6225	6.38	6.22	9.31
	71	6305	6.26	6.37	9.33
	87	6385	6.44	6.37	9.42
802.11ax HE160	15	6025	9.14	6.92	11.18
	47	6185	9.49	8.33	11.96
	79	6345	9.32	8.79	12.07

Conducted Power (Full)_LPI_Monopole			
UNII-6 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	97	6435	0.91
	101	6455	0.87
	105	6475	0.93
	109	6495	0.71
	113	6515	0.82
802.11ax HE20	97	6435	0.93
	101	6455	0.91
	105	6475	0.81
	109	6495	0.7
	113	6515	0.94
802.11ax HE40	99	6445	3.89
	107	6485	3.71
	115	6525	3.79
802.11ax HE80	103	6465	6.42
	119	6545	6.3
802.11ax HE160	111	6505	9.42

Conducted Power (Full)_LPI_Monopole			
UNII-6 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	97	6435	0.81
	101	6455	0.81
	105	6475	0.92
	109	6495	0.84
	113	6515	0.75
802.11ax HE20	97	6435	0.8
	101	6455	0.79
	105	6475	0.89
	109	6495	0.84
	113	6515	0.86
802.11ax HE40	99	6445	3.83
	107	6485	3.84
	115	6525	3.95
802.11ax HE80	103	6465	6.21
	119	6545	6.27
802.11ax HE160	111	6505	9.29

Conducted Power (Full)_LPI_Monopole					
UNII-6 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	97	6435	0.88	0.92	3.91
	101	6455	0.8	0.88	3.85
	105	6475	0.72	0.87	3.81
	109	6495	0.87	0.71	3.8
	113	6515	0.93	0.86	3.91
802.11ax HE20	97	6435	0.71	0.87	3.8
	101	6455	0.93	0.74	3.85
	105	6475	0.95	0.82	3.9
	109	6495	0.89	0.82	3.87
	113	6515	0.71	0.95	3.84
802.11ax HE40	99	6445	3.93	3.85	6.9
	107	6485	3.86	3.91	6.9
	115	6525	3.93	3.86	6.91
802.11ax HE80	103	6465	6.3	6.23	9.28
	119	6545	6.26	6.3	9.29
802.11ax HE160	111	6505	9.49	9.08	12.3

Conducted Power (Full)_LPI_Monopole			
UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	117	6535	0.87
	121	6555	0.82
	125	6575	0.82
	129	6595	0.82
	133	6615	0.75
	137	6635	0.94
	141	6655	0.86
	145	6675	0.75
	149	6695	0.77
	153	6715	0.77
	157	6735	0.93
	161	6755	0.72
	165	6775	0.77
	169	6795	0.9
	173	6815	0.95
	177	6835	0.73
	181	6855	0.79
	185	6875	0.76
802.11ax HE20	117	6535	0.91
	121	6555	0.76
	125	6575	0.71
	129	6595	0.93
	133	6615	0.87
	137	6635	0.92
	141	6655	0.94
	145	6675	0.78
	149	6695	0.84
	153	6715	0.91
	157	6735	0.93
	161	6755	0.85
	165	6775	0.92
	169	6795	0.76
	173	6815	0.72
	177	6835	0.91
	181	6855	0.87
	185	6875	0.72
802.11ax HE40	123	6565	3.87
	131	6605	3.74
	139	6645	3.93
	147	6685	3.7
	155	6725	3.9
	163	6765	3.71
	171	6805	3.79
	179	6845	3.75
	187	6885	3.93
802.11ax HE80	135	6625	6.22
	151	6705	6.23
	167	6785	6.31
	183	6865	6.2
802.11ax HE160	143	6665	9.45
	175	6825	9.31

Conducted Power (Full)_LPI_Monopole			
UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	117	6535	0.93
	121	6555	0.88
	125	6575	0.95
	129	6595	0.77
	133	6615	0.75
	137	6635	0.7
	141	6655	0.9
	145	6675	0.91
	149	6695	0.76
	153	6715	0.92
	157	6735	0.93
	161	6755	0.78
	165	6775	0.87
	169	6795	0.75
	173	6815	0.89
	177	6835	0.93
	181	6855	0.74
	185	6875	0.78
802.11ax HE20	117	6535	0.84
	121	6555	0.9
	125	6575	0.95
	129	6595	0.89
	133	6615	0.75
	137	6635	0.78
	141	6655	0.78
	145	6675	0.85
	149	6695	0.73
	153	6715	0.78
	157	6735	0.94
	161	6755	0.79
	165	6775	0.84
	169	6795	0.84
	173	6815	0.79
	177	6835	0.74
	181	6855	0.92
	185	6875	0.94
802.11ax HE40	123	6565	3.94
	131	6605	3.81
	139	6645	3.88
	147	6685	3.7
	155	6725	3.93
	163	6765	3.74
	171	6805	3.95
	179	6845	3.88
	187	6885	3.84
802.11ax HE80	135	6625	6.41
	151	6705	6.26
	167	6785	6.28
	183	6865	6.45
802.11ax HE160	143	6665	9.48
	175	6825	9.45

Conducted Power (Full)_LPI_Monopole					
UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	117	6535	0.95	0.95	3.96
	121	6555	0.81	0.73	3.78
	125	6575	0.75	0.82	3.8
	129	6595	0.84	0.82	3.84
	133	6615	0.81	0.95	3.89
	137	6635	0.85	0.82	3.85
	141	6655	0.76	0.7	3.74
	145	6675	0.83	0.77	3.81
	149	6695	0.92	0.82	3.88
	153	6715	0.86	0.84	3.86
	157	6735	0.83	0.74	3.8
	161	6755	0.71	0.87	3.8
	165	6775	0.95	0.84	3.91
	169	6795	0.7	0.94	3.83
	173	6815	0.86	0.82	3.85
	177	6835	0.81	0.76	3.8
	181	6855	0.95	0.74	3.86
	185	6875	0.92	0.73	3.84
802.11ax HE20	117	6535	0.91	0.91	3.92
	121	6555	0.86	0.83	3.86
	125	6575	0.71	0.78	3.76
	129	6595	0.87	0.92	3.91
	133	6615	0.75	0.78	3.78
	137	6635	0.87	0.77	3.83
	141	6655	0.9	0.7	3.81
	145	6675	0.74	0.91	3.84
	149	6695	0.77	0.81	3.8
	153	6715	0.87	0.84	3.87
	157	6735	0.8	0.83	3.83
	161	6755	0.93	0.77	3.86
	165	6775	0.77	0.77	3.78
	169	6795	0.79	0.7	3.76
	173	6815	0.76	0.77	3.78
	177	6835	0.83	0.87	3.86
	181	6855	0.91	0.92	3.93
	185	6875	0.86	0.72	3.8
802.11ax HE40	123	6565	3.81	3.72	6.78
	131	6605	3.7	3.9	6.81
	139	6645	3.8	3.7	6.76
	147	6685	3.86	3.72	6.8
	155	6725	3.76	3.73	6.76
	163	6765	3.86	3.87	6.88
	171	6805	3.72	3.73	6.74
	179	6845	3.76	3.8	6.79
	187	6885	3.91	3.82	6.88
802.11ax HE80	135	6625	6.23	6.21	9.23
	151	6705	6.24	6.31	9.29
	167	6785	6.36	6.22	9.3
	183	6865	6.29	6.25	9.28
802.11ax HE160	143	6665	9.48	9.12	12.31
	175	6825	9.12	8.36	11.77

Conducted Power (Full)_LPI_Monopole			
UNII-8 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	189	6895	0.79
	193	6915	0.75
	197	6935	0.94
	201	6955	0.71
	205	6975	0.82
	209	6995	0.93
	213	7015	0.85
	217	7035	0.88
	221	7055	0.81
	225	7075	0.9
	229	7095	0.91
	233	7115	0.9
802.11ax HE20	189	6895	0.75
	193	6915	0.87
	197	6935	0.8
	201	6955	0.81
	205	6975	0.73
	209	6995	0.72
	213	7015	0.86
	217	7035	0.88
	221	7055	0.77
	225	7075	0.79
	229	7095	0.76
	233	7115	-4.1
802.11ax HE40	195	6925	3.95
	203	6965	3.83
	211	7005	3.92
	219	7045	3.81
	227	7085	3.76
802.11ax HE80	199	6945	6.3
	215	7025	6.28
802.11ax HE160	207	6985	9.14

Conducted Power (Full)_LPI_Monopole			
UNII-8 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	189	6895	0.94
	193	6915	0.81
	197	6935	0.82
	201	6955	0.92
	205	6975	0.77
	209	6995	0.84
	213	7015	0.78
	217	7035	0.77
	221	7055	0.7
	225	7075	0.75
	229	7095	0.88
	233	7115	0.79
802.11ax HE20	189	6895	0.8
	193	6915	0.87
	197	6935	0.75
	201	6955	0.9
	205	6975	0.75
	209	6995	0.85
	213	7015	0.71
	217	7035	0.86
	221	7055	0.71
	225	7075	0.79
	229	7095	0.76
	233	7115	-4.3
802.11ax HE40	195	6925	3.95
	203	6965	3.83
	211	7005	3.92
	219	7045	3.72
	227	7085	3.9
802.11ax HE80	199	6945	6.21
	215	7025	6.33
802.11ax HE160	207	6985	9.46

Conducted Power (Full)_LPI_Monopole					
UNII-8 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	189	6895	0.93	0.87	3.91
	193	6915	0.94	0.89	3.93
	197	6935	0.78	0.86	3.83
	201	6955	0.77	0.91	3.85
	205	6975	0.84	0.83	3.85
	209	6995	0.76	0.79	3.79
	213	7015	0.77	0.83	3.81
	217	7035	0.93	0.74	3.85
	221	7055	0.89	0.72	3.82
	225	7075	0.8	0.81	3.82
	229	7095	0.85	0.75	3.81
	233	7115	0.83	0.74	3.8
802.11ax HE20	189	6895	0.79	0.76	3.79
	193	6915	0.78	0.78	3.79
	197	6935	0.92	0.85	3.9
	201	6955	0.83	0.79	3.82
	205	6975	0.77	0.88	3.84
	209	6995	0.93	0.72	3.84
	213	7015	0.75	0.92	3.85
	217	7035	0.73	0.76	3.76
	221	7055	0.86	0.72	3.8
	225	7075	0.73	0.7	3.73
	229	7095	0.71	0.88	3.81
	233	7115	-4.1	-4.07	-1.07
802.11ax HE40	195	6925	3.74	3.92	6.84
	203	6965	3.85	3.89	6.88
	211	7005	3.79	3.73	6.77
	219	7045	3.82	3.75	6.8
	227	7085	3.73	3.78	6.77
802.11ax HE80	199	6945	6.35	6.38	9.38
	215	7025	6.4	6.43	9.43
802.11ax HE160	207	6985	9.43	8.74	12.11

Appendix F. SAR and Incident Power Density Test Result

SAR Results for Body Exposure Condition.

Note:

1. SAR testing for WLAN / BT was performed on the maximum power mode.
2. Per KDB 388624 APPENDIX OVER6G, the minimum of 5 channels to perform IPD across U-NII 5,6,7 and 8. and measured results were scaled by factor 1.545 to reported power density when measurement uncertainty exceed 30%.

SAR Test Result

System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.9G	802.11ac VHT80	Front Face	8	171	PIFA	Ant 0	98.70	1.01	16.50	16.45	1.01	-0.03	0.521	0.53
	WLAN5.9G	802.11ac VHT80	Rear Face	8	171	PIFA	Ant 0	98.70	1.01	16.50	16.45	1.01	0.19	0.261	0.27
	WLAN5.9G	802.11ac VHT80	Left Side	8	171	PIFA	Ant 0	98.70	1.01	16.50	16.45	1.01	-0.18	0.049	0.05
	WLAN5.9G	802.11ac VHT80	Right Side	8	171	PIFA	Ant 0	98.70	1.01	16.50	16.45	1.01	0.18	0.092	0.09
	WLAN5.9G	802.11ac VHT80	Top Side	8	171	PIFA	Ant 0	98.70	1.01	16.50	16.45	1.01	0.13	0.046	0.05
	WLAN5.9G	802.11ac VHT80	Bottom Side	8	171	PIFA	Ant 0	98.70	1.01	16.50	16.45	1.01	-0.16	0.03	0.03
5	WLAN5.9G	802.11ac VHT80	Front Face	8	171	PIFA	Ant 1	98.40	1.02	16.50	16.49	1.00	0.11	0.54	0.55
	WLAN5.9G	802.11ac VHT80	Rear Face	8	171	PIFA	Ant 1	98.40	1.02	16.50	16.49	1.00	0.16	0.263	0.27
	WLAN5.9G	802.11ac VHT80	Left Side	8	171	PIFA	Ant 1	98.40	1.02	16.50	16.49	1.00	0.04	0.05	0.05
	WLAN5.9G	802.11ac VHT80	Right Side	8	171	PIFA	Ant 1	98.40	1.02	16.50	16.49	1.00	-0.12	0.093	0.09
	WLAN5.9G	802.11ac VHT80	Top Side	8	171	PIFA	Ant 1	98.40	1.02	16.50	16.49	1.00	-0.18	0.046	0.05
	WLAN5.9G	802.11ac VHT80	Bottom Side	8	171	PIFA	Ant 1	98.40	1.02	16.50	16.49	1.00	-0.18	0.03	0.03
	WLAN5.9G	802.11ac VHT80	Front Face	8	171	PIFA	Ant 0+1	98.50	1.02	19.50	19.31	1.04	-0.11	0.507	0.54
	WLAN5.9G	802.11ac VHT80	Rear Face	8	171	PIFA	Ant 0+1	98.50	1.02	19.50	19.31	1.04	0.09	0.247	0.26
	WLAN5.9G	802.11ac VHT80	Left Side	8	171	PIFA	Ant 0+1	98.50	1.02	19.50	19.31	1.04	-0.04	0.046	0.05
	WLAN5.9G	802.11ac VHT80	Right Side	8	171	PIFA	Ant 0+1	98.50	1.02	19.50	19.31	1.04	-0.08	0.087	0.09
	WLAN5.9G	802.11ac VHT80	Top Side	8	171	PIFA	Ant 0+1	98.50	1.02	19.50	19.31	1.04	0.19	0.043	0.05
	WLAN5.9G	802.11ac VHT80	Bottom Side	8	171	PIFA	Ant 0+1	98.50	1.02	19.50	19.31	1.04	-0.07	0.029	0.03
6	BT	BR	Front Face	8	0	PIFA	Ant 0	76.74	1.30	16.00	14.41	1.44	0.02	0.414	0.78
	BT	BR	Rear Face	8	0	PIFA	Ant 0	76.74	1.30	16.00	14.41	1.44	-0.01	0.306	0.57
	BT	BR	Left Side	8	0	PIFA	Ant 0	76.74	1.30	16.00	14.41	1.44	0.01	0.055	0.10
	BT	BR	Right Side	8	0	PIFA	Ant 0	76.74	1.30	16.00	14.41	1.44	-0.19	0.055	0.10
	BT	BR	Top Side	8	0	PIFA	Ant 0	76.74	1.30	16.00	14.41	1.44	-0.07	0.039	0.07
	BT	BR	Bottom Side	8	0	PIFA	Ant 0	76.74	1.30	16.00	14.41	1.44	0.1	0.027	0.05
	BT	BR	Front Face	8	39	PIFA	Ant 0	76.74	1.30	16.00	14.28	1.49	-0.15	0.398	0.77
	BT	BR	Front Face	8	78	PIFA	Ant 0	76.74	1.30	16.00	14.35	1.46	0.1	0.395	0.75

[illegible]

[illegible]

Appendix H. Analysis of Simultaneous Transmission.

The analysis of simultaneous transmission SAR are shown as below.

<Possibilities of Simultaneous Transmission>

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous TX Combination	Capable Transmit Configurations	Exposure Condition
A	WLAN 2.4G + WLAN 5GHz	Yes
B	WLAN 2.4G + WLAN 6GHz	Yes
C	WLAN 5GHz +BT	Yes
D	WLAN 6GHz + BT	Yes

Notes:

1. The Simultaneous TX Combination C and D are subject to Dual Band Simultaneously.
2. WLAN 2.4GHz can transmit timely shared with BT at antennas.

Simultaneous Transmission SAR Evaluation_PIFA

Position	1	2	3	4	A(1+2)	B(1+3)	C(2+4)	D(3+4)
	Max WLAN 2.4GHz	Max WLAN 5GHz	Max WLAN 6GHz	Max BT	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg
	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg				
Front Face	0.69	0.71	0.76	0.78	1.40	1.45	1.49	1.54
Rear Face	0.57	0.34	0.70	0.57	0.91	1.27	0.91	1.27
Left Side	0.10	0.07	0.28	0.10	0.17	0.38	0.17	0.38
Right Side	0.10	0.12	0.26	0.10	0.22	0.36	0.22	0.36
Top Side	0.09	0.06	0.15	0.07	0.15	0.24	0.13	0.22
Bottom Side	0.05	0.04	0.11	0.05	0.09	0.16	0.09	0.16

Simultaneous Transmission SAR Evaluation_Monopole								
Position	1	2	3	4	A(1+2)	B(1+3)	C(2+4)	D(3+4)
	Max WLAN 2.4GHz	Max WLAN 5GHz	Max WLAN 6GHz	Max BT	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg
	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg				
Front Face	0.55	0.79	0.46	0.74	1.34	1.01	1.53	1.20
Rear Face	0.40	0.39	0.31	0.55	0.79	0.71	0.94	0.86
Left Side	0.07	0.07	0.15	0.10	0.14	0.22	0.17	0.25
Right Side	0.07	0.14	0.12	0.10	0.21	0.19	0.24	0.22
Top Side	0.05	0.07	0.07	0.07	0.12	0.12	0.14	0.14
Bottom Side	0.04	0.04	0.05	0.05	0.08	0.09	0.09	0.10

Total Exposure Ratio (Body)_PIFA

Position	1	2	3	4	A(1+2)	B(1+3)	C(2+4)	D(3+4)
	Max WLAN 2.4GHz	Max WLAN 5GHz	Max WLAN 6GHz	Max BT	Total Exposure Ratio	Total Exposure Ratio	Total Exposure Ratio	Total Exposure Ratio
	1g SAR W/kg	1g SAR W/kg	4cm ² W/m ²	1g SAR W/kg				
Front Face	0.69	0.71	4.96	0.78	0.88	0.93	0.93	0.98
Rear Face	0.57	0.34	0.00	0.57	0.57	0.36	0.57	0.36
Left Side	0.10	0.07	0.00	0.10	0.11	0.06	0.11	0.06
Right Side	0.10	0.12	0.00	0.10	0.14	0.06	0.14	0.06
Top Side	0.09	0.06	0.00	0.07	0.09	0.06	0.08	0.04
Bottom Side	0.05	0.04	0.00	0.05	0.06	0.03	0.06	0.03

Total Exposure Ratio (Body)_Monopole								
Position	1	2	3	4	A(1+2)	B(1+3)	C(2+4)	D(3+4)
	Max WLAN 2.4GHz	Max WLAN 5GHz	Max WLAN 6GHz	Max BT	Total Exposure Ratio	Total Exposure Ratio	Total Exposure Ratio	Total Exposure Ratio
	1g SAR W/kg	1g SAR W/kg	4cm ² W/m ²	1g SAR W/kg				
Front Face	0.55	0.79	4.98	0.74	0.84	0.84	0.96	0.96
Rear Face	0.40	0.39	0.00	0.55	0.49	0.25	0.59	0.34
Left Side	0.07	0.07	0.00	0.10	0.09	0.04	0.11	0.06
Right Side	0.07	0.14	0.00	0.10	0.13	0.04	0.15	0.06
Top Side	0.05	0.07	0.00	0.07	0.08	0.03	0.09	0.04
Bottom Side	0.04	0.04	0.00	0.05	0.05	0.03	0.06	0.03

Appendix Z. Calibration Certificate for Probe and Dipole

The SPEAG calibration certificates are shown as follows.



In Collaboration with
s p e a g
CALIBRATION LABORATORY



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, Chi
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Client

B.V.ADT

Certificate No: **Z21-60284**

CALIBRATION CERTIFICATE

Object

D2450V2 - SN: 737

Calibration Procedure(s)

FF-Z11-003-01

Calibration Procedures for dipole validation kits

Calibration date:

August 26, 2021

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	23-Sep-20 (CTTL, No.J20X08336)	Sep-21
Power sensor NRP8S	104291	23-Sep-20 (CTTL, No.J20X08336)	Sep-21
Reference Probe EX3DV4	SN 7517	03-Feb-21(CTTL-SPEAG,No.Z21-60001)	Feb-22
DAE3	SN 536	06-Nov-20(CTTL-SPEAG,No.Z20-60452)	Nov-21
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No)	Scheduled Calibration
Signal Generator E4438C	MY49071430	01-Feb-21 (CTTL, No.J21X00593)	Jan-22
NetworkAnalyzer E5071C	MY46110673	14-Jan-21 (CTTL, No.J21X00232)	Jan-22

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: August 31, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM _{x,y,z}
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.0 $\pm$ 6 %	1.77 mho/m $\pm$ 6 %
Head TSL temperature change during test	<1.0 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.0 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.6 W/kg $\pm$ 18.8 % (k=2)
SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	5.92 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.9 W/kg $\pm$ 18.7 % (k=2)



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

<http://www.chinattl.cn>

Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$54.0\Omega + 4.29j\Omega$
Return Loss	- 25.0dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.067 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: ctll@chinattl.com http://www.chinattl.cn

DASY5 Validation Report for Head TSL

Date: 08.26.2021

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 737

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.772$ S/m; $\epsilon_r = 40.04$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7517; ConvF(7.34, 7.34, 7.34) @ 2450 MHz; Calibrated: 2021-02-03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn536; Calibrated: 2020-11-06
- Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 108.5 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 27.8 W/kg

SAR(1 g) = 13 W/kg; SAR(10 g) = 5.92 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 46.7%

Maximum value of SAR (measured) = 22.3 W/kg

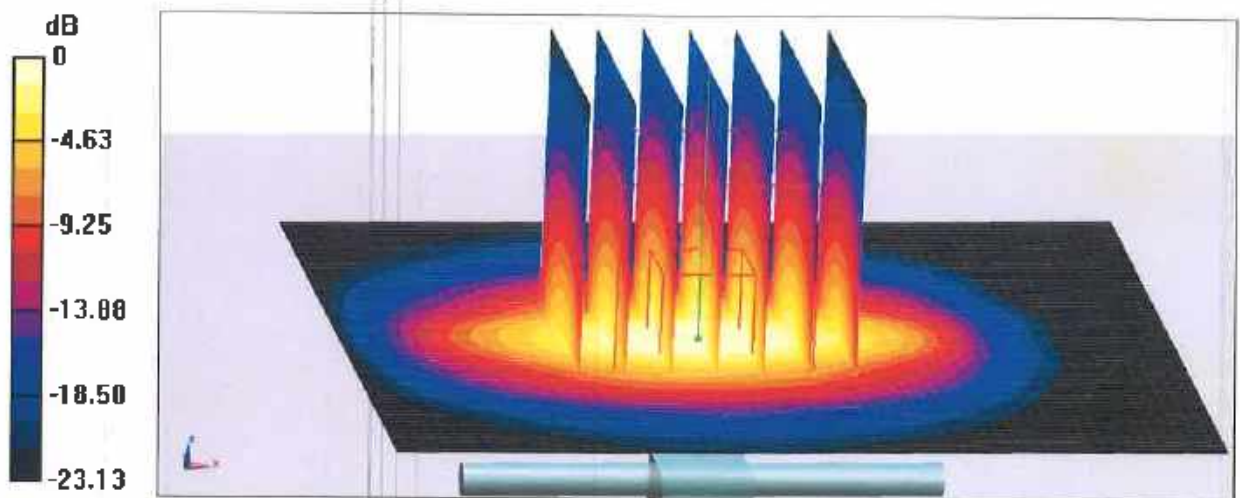

0 dB = 22.3 W/kg = 13.48 dBW/kg




In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Impedance Measurement Plot for Head TSL

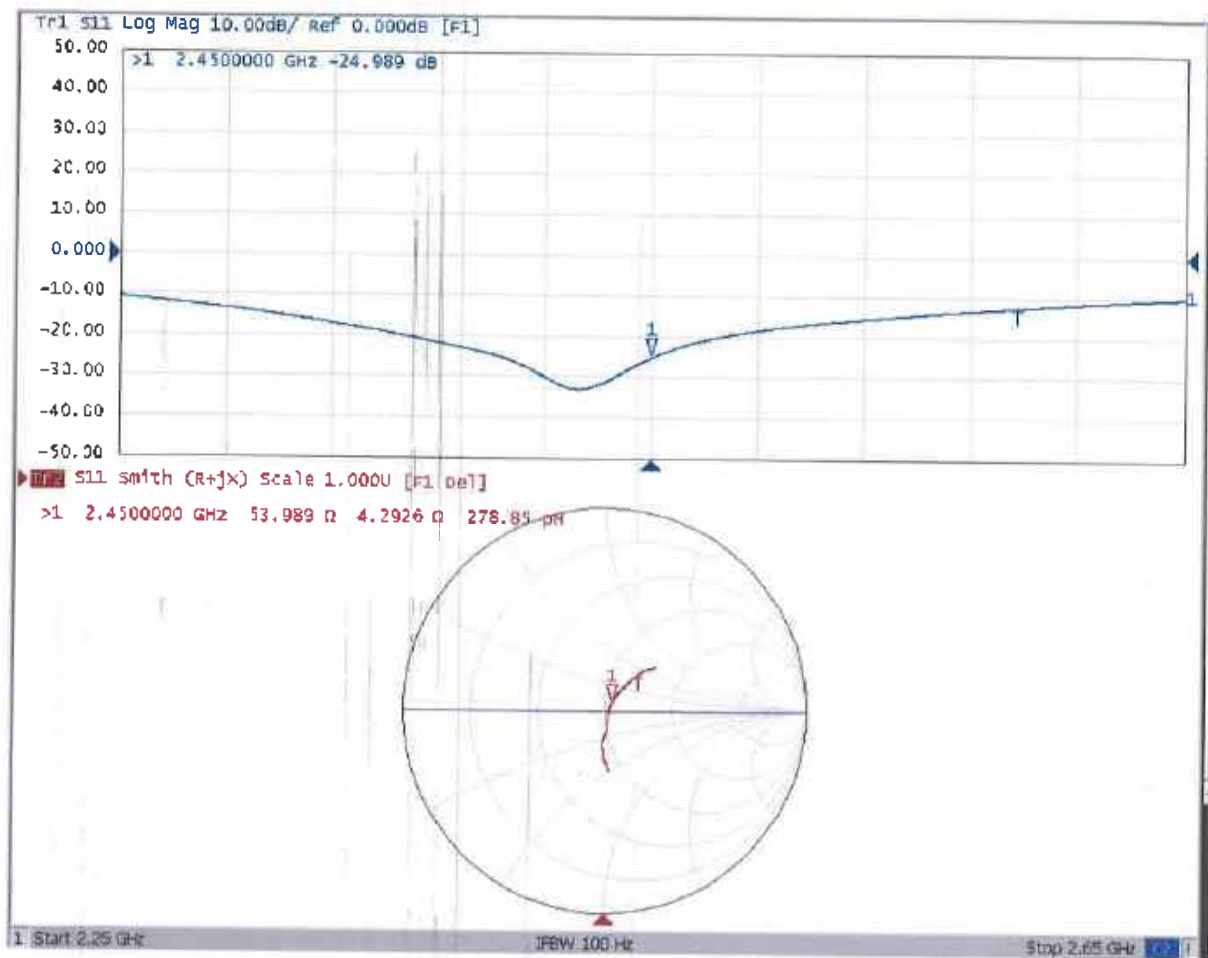



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **Auden**
Taoyuan City

Certificate No. **D5GHzV2-1203_Dec23**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1203**

Calibration procedure(s) **QA CAL-22.v7**
Calibration Procedure for SAR Validation Sources between 3-10 GHz

Calibration date: **December 14, 2023**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP2	SN: 104778	30-Mar-23 (No. 217-03804/03805)	Mar-24
Power sensor NRP-Z91	SN: 103244	30-Mar-23 (No. 217-03804)	Mar-24
Power sensor NRP-Z91	SN: 103245	30-Mar-23 (No. 217-03805)	Mar-24
Reference 20 dB Attenuator	SN: BH9394 (20k)	30-Mar-23 (No. 217-03809)	Mar-24
Type-N mismatch combination	SN: 310982 / 06327	30-Mar-23 (No. 217-03810)	Mar-24
Reference Probe EX3DV4	SN: 3503	07-Mar-23 (No. EX3-3503_Mar23)	Mar-24
DAE4	SN: 601	03-Oct-23 (No. DAE4-601_Oct23)	Oct-24

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-22)	In house check: Oct-24
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-22)	In house check: Oct-24
Power sensor HP 8481A	SN: MY41093315	07-Oct-15 (in house check Oct-22)	In house check: Oct-24
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-22)	In house check: Oct-24
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

Calibrated by: **Krešimir Franjić** **Laboratory Technician**

Signature

Approved by: **Sven Kühn** **Technical Manager**

Issued: December 14, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- c) DASY System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The source is mounted in a touch configuration below the center marking of the flat phantom.
- *Return Loss:* This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5250 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5750 MHz $\pm$ 1 MHz 5850 MHz $\pm$ 1 MHz	

Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.71 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	36.1 $\pm$ 6 %	4.63 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5250 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.90 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	79.0 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.27 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.7 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.7 ± 6 %	5.02 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.16 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.3 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.4	5.22 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.6 ± 6 %	5.16 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5750 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW Input power	7.83 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	78.4 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.24 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.4 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5850 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.2	5.32 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.4 ± 6 %	5.24 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL at 5850 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.94 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	79.4 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.26 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.6 W/kg ± 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5250 MHz

Impedance, transformed to feed point	47.6 Ω - 3.5 j Ω
Return Loss	- 27.2 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	50.8 Ω + 1.9 j Ω
Return Loss	- 33.6 dB

Antenna Parameters with Head TSL at 5750 MHz

Impedance, transformed to feed point	54.7 Ω + 6.6 j Ω
Return Loss	- 22.3 dB

Antenna Parameters with Head TSL at 5850 MHz

Impedance, transformed to feed point	50.6 Ω + 7.2 j Ω
Return Loss	- 22.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.190 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1203

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz, Frequency: 5850 MHz

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.63$ S/m; $\epsilon_r = 36.1$; $\rho = 1000$ kg/m³Medium parameters used: $f = 5600$ MHz; $\sigma = 5.02$ S/m; $\epsilon_r = 35.7$; $\rho = 1000$ kg/m³Medium parameters used: $f = 5750$ MHz; $\sigma = 5.16$ S/m; $\epsilon_r = 35.6$; $\rho = 1000$ kg/m³Medium parameters used: $f = 5850$ MHz; $\sigma = 5.24$ S/m; $\epsilon_r = 35.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.5, 5.5, 5.5) @ 5250 MHz, ConvF(5.1, 5.1, 5.1) @ 5600 MHz, ConvF(5.08, 5.08, 5.08) @ 5750 MHz, ConvF(4.99, 4.99, 4.99) @ 5850 MHz; Calibrated: 07.03.2023
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 03.10.2023
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.59 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 26.3 W/kg

SAR(1 g) = 7.90 W/kg; SAR(10 g) = 2.27 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 71.7%

Maximum value of SAR (measured) = 17.9 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 72.06 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 29.3 W/kg

SAR(1 g) = 8.16 W/kg; SAR(10 g) = 2.33 W/kg


Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 69%


Maximum value of SAR (measured) = 18.8 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 69.04 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 29.8 W/kg
SAR(1 g) = 7.83 W/kg; SAR(10 g) = 2.24 W/kg
Smallest distance from peaks to all points 3 dB below = 7.5 mm
Ratio of SAR at M2 to SAR at M1 = 67.1%
Maximum value of SAR (measured) = 18.5 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5850 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 69.65 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 30.8 W/kg
SAR(1 g) = 7.94 W/kg; SAR(10 g) = 2.26 W/kg
Smallest distance from peaks to all points 3 dB below = 7.5 mm
Ratio of SAR at M2 to SAR at M1 = 66.3%
Maximum value of SAR (measured) = 18.9 W/kg

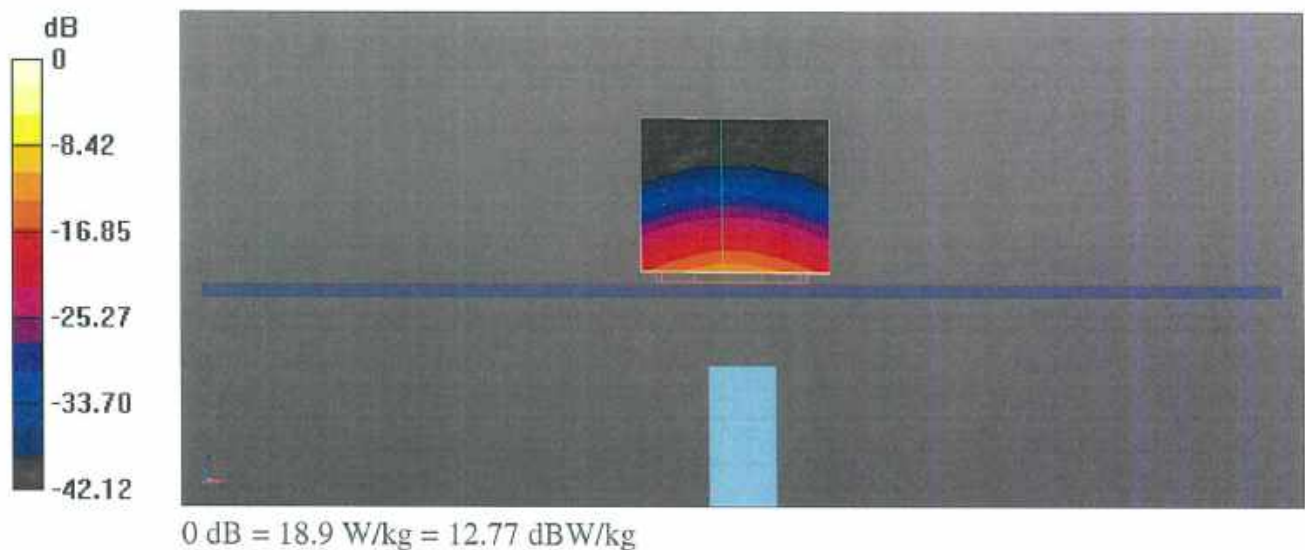

Impedance Measurement Plot for Head TSL

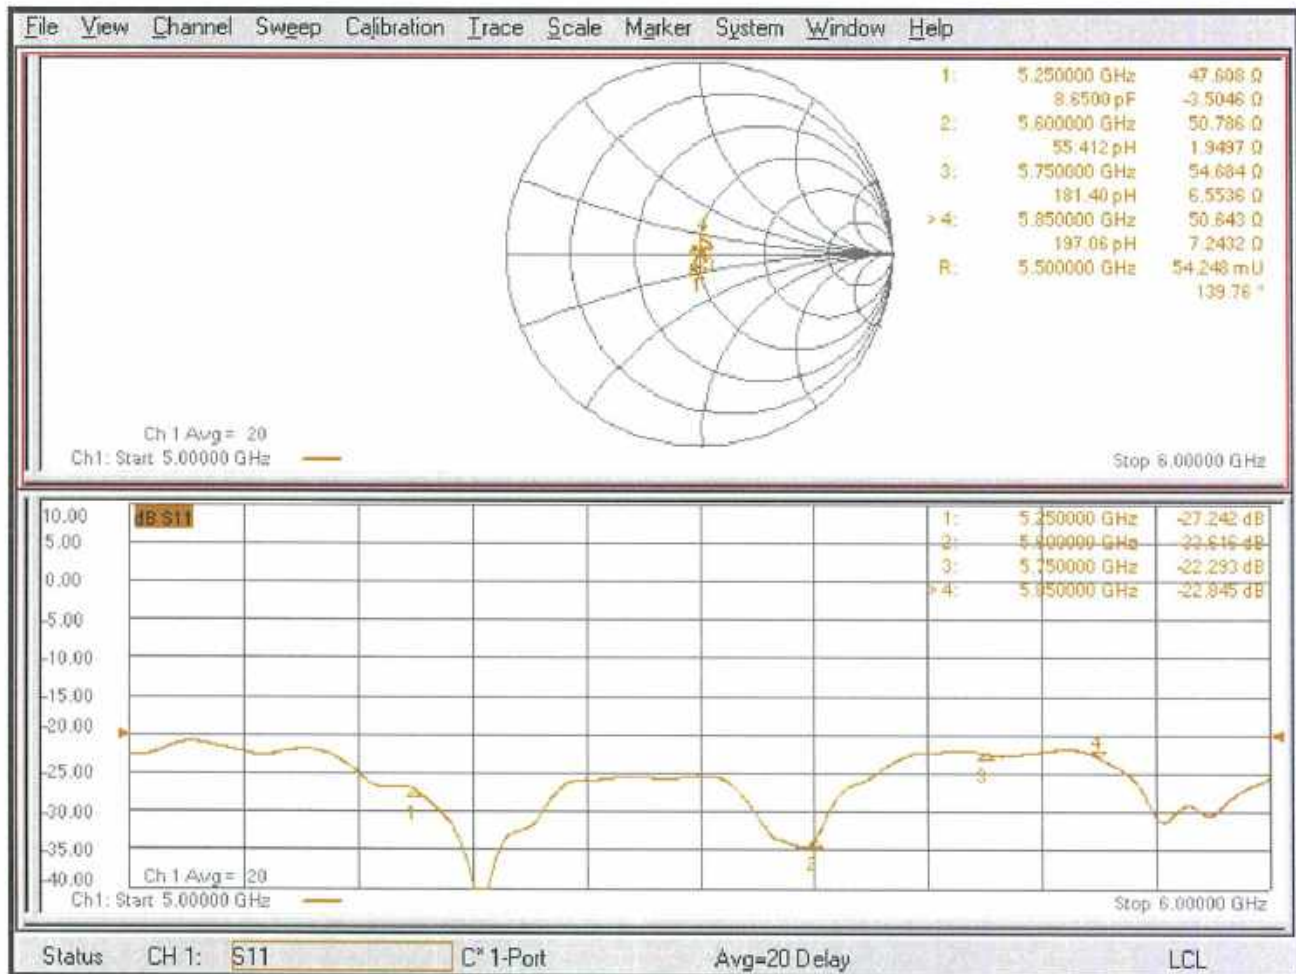



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **B.V. ADT (Auden)**

Certificate No: **D5GHzV2-1019_Mar21**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1019**

Calibration procedure(s) **QA CAL-22.v6
Calibration Procedure for SAR Validation Sources between 3-10 GHz**

Calibration date: **March 19, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	01-Apr-20 (No. 217-03100/03101)	Apr-21
Power sensor NRP-Z91	SN: 103244	01-Apr-20 (No. 217-03100)	Apr-21
Power sensor NRP-Z91	SN: 103245	01-Apr-20 (No. 217-03101)	Apr-21
Reference 20 dB Attenuator	SN: BH9394 (20k)	31-Mar-20 (No. 217-03106)	Apr-21
Type-N mismatch combination	SN: 310982 / 06327	31-Mar-20 (No. 217-03104)	Apr-21
Reference Probe EX3DV4	SN: 3503	30-Dec-20 (No. EX3-3503_Dec20)	Dec-21
DAC4	SN: 601	02-Nov-20 (No. DAE4-601_Nov20)	Nov-21

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

Calibrated by: **Claudio Leubler** **Laboratory Technician**

Approved by: **Katja Pokovic** **Technical Manager**

Signature

Signature

Issued: **March 19, 2021**

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5250 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5750 MHz $\pm$ 1 MHz	

Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.71 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	34.7 $\pm$ 6 %	4.51 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5250 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.13 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.6 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.32 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.0 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	34.2 $\pm$ 6 %	4.86 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.32 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	82.4 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.36 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.3 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.4	5.22 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.0 ± 6 %	5.01 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	-----	-----

SAR result with Head TSL at 5750 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.02 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	79.4 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.27 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.4 W/kg ± 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5250 MHz

Impedance, transformed to feed point	54.1 Ω - 6.4 j Ω
Return Loss	- 22.7 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	57.6 Ω - 2.5 j Ω
Return Loss	- 22.6 dB

Antenna Parameters with Head TSL at 5750 MHz

Impedance, transformed to feed point	57.9 Ω + 3.1 j Ω
Return Loss	- 22.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.203 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 19.03.2021

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1019

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.51$ S/m; $\epsilon_r = 34.7$; $\rho = 1000$ kg/m³

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.86$ S/m; $\epsilon_r = 34.2$; $\rho = 1000$ kg/m³

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.01$ S/m; $\epsilon_r = 34$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.5, 5.5, 5.5) @ 5250 MHz, ConvF(5.1, 5.1, 5.1) @ 5600 MHz, ConvF(5.08, 5.08, 5.08) @ 5750 MHz; Calibrated: 30.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.11.2020
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 79.20 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 27.6 W/kg

SAR(1 g) = 8.13 W/kg; SAR(10 g) = 2.32 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 70.7%

Maximum value of SAR (measured) = 18.1 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 77.00 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 31.0 W/kg

SAR(1 g) = 8.32 W/kg; SAR(10 g) = 2.36 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 66.9%

Maximum value of SAR (measured) = 19.6 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 74.22 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 31.6 W/kg

SAR(1 g) = 8.02 W/kg; SAR(10 g) = 2.27 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm


Ratio of SAR at M2 to SAR at M1 = 65%

Maximum value of SAR (measured) = 19.2 W/kg

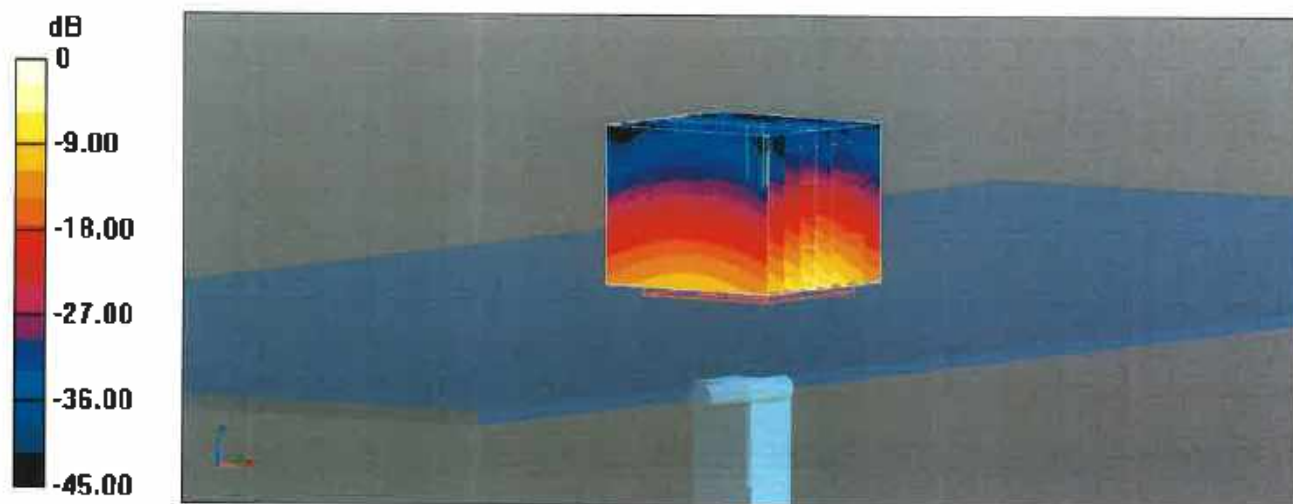

0 dB = 19.6 W/kg = 12.92 dBW/kg

Impedance Measurement Plot for Head TSL

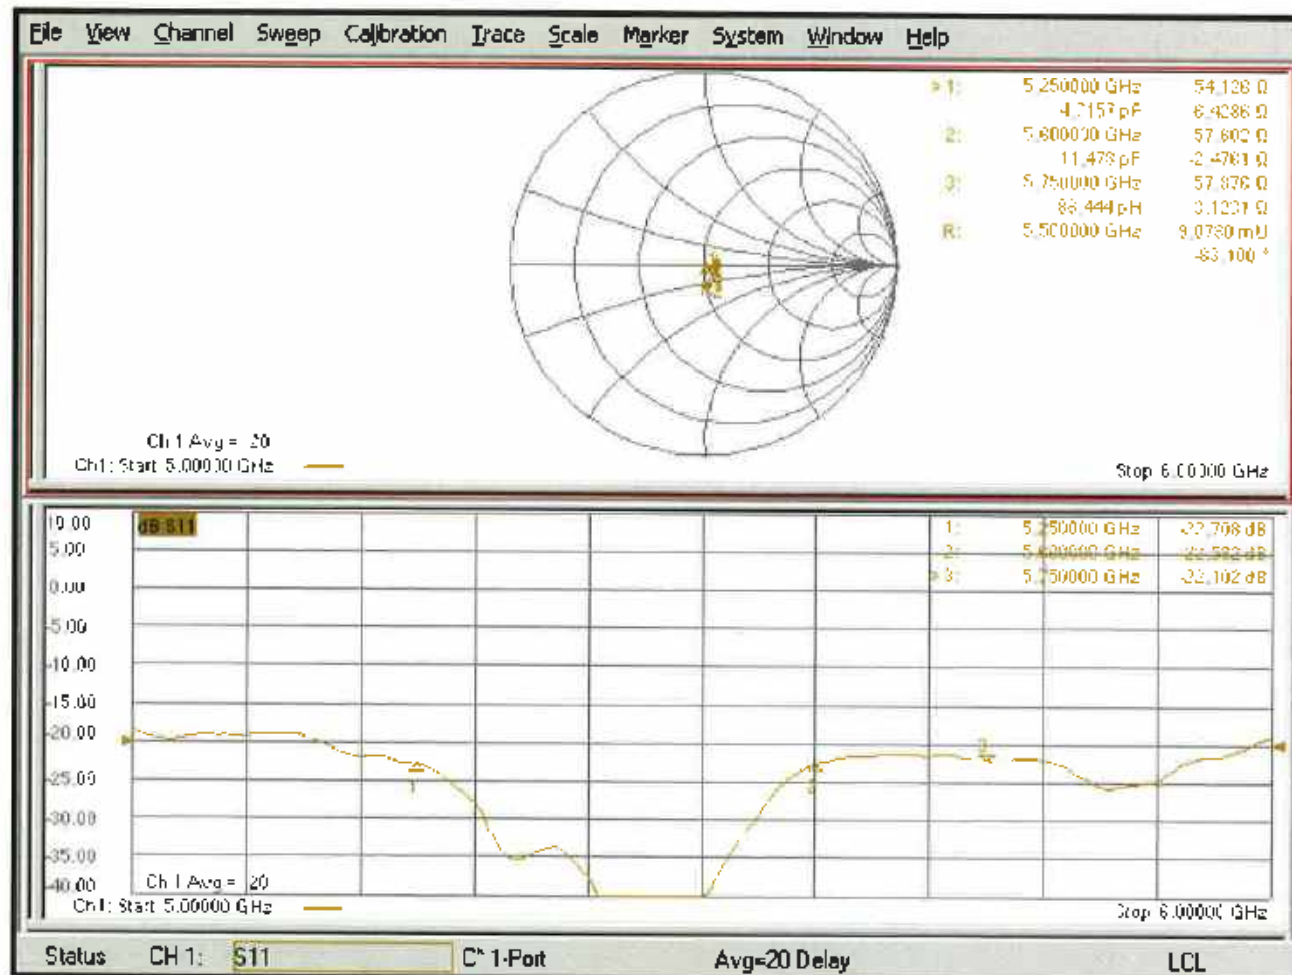



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **B.V. ADT**
Taoyuan City

Certificate No. **D6.5GHzV2-1008_Sep23**

CALIBRATION CERTIFICATE

Object **D6.5GHzV2 - SN:1008**

Calibration procedure(s) **QA CAL-22_V7**
Calibration Procedure for SAR Validation Sources between 3-10 GHz

Calibration date: **September 21, 2023**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power sensor R&S NRP331	SN: 100967	03-Apr-23 (No. 217-03806)	Apr-24
Reference 20 dB Attenuator	SN: 9149394 (20k)	30-Mar-23 (No. 217-03809)	Mar-24
Mismatch combination	SN: 84224 / 380D	03-Apr-23 (No. 217-03812)	Apr-24
Reference Probe EX3DV4	SN: 7405	12-Jun-23 (No. EX3-7405_Jun23)	Jun-24
DAE4	SN: 908	03-Jul-23 (No. DAE4-908_Jul23)	Jul-24

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator Anapico APSIN20G	SN: 827	18-Dec-18 (in house check Dec-21)	In house check: Dec-23
Power sensor NRP-Z23	SN: 100169	10-Jan-19 (in house check Nov-22)	In house check: Nov-23
Power sensor NRP-18T	SN: 100950	28-Sep-22 (in house check Nov-22)	In house check: Nov-23
Network Analyzer Keysight E5063A	SN: MY54504221	31-Oct-19 (in house check Oct-22)	In house check: Oct-25

Calibrated by: **Jeton Kastrati** **Laboratory Technician**

Approved by: **Sven Kühn** **Technical Manager**

Issued: September 21, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range Of 4 MHz To 10 GHz)", October 2020.

Additional Documentation:

- b) DASY System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The Return Loss ensures low reflected power. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.
- *The absorbed power density (APD):* The absorbed power density is evaluated according to Samaras T, Christ A, Kuster N, "Compliance assessment of the epithelial or absorbed power density above 6 GHz using SAR measurement systems", Bioelectromagnetics, 2021 (submitted). The additional evaluation uncertainty of 0.55 dB (rectangular distribution) is considered.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY6	V16.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	5 mm	with Spacer
Zoom Scan Resolution	dx, dy = 3.4 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	6500 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	34.5	6.07 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	33.3 $\pm$ 6 %	6.09 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	29.4 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	292 W/kg $\pm$ 24.7 % (k=2)

SAR averaged over 8 cm ³ (8 g) of Head TSL	Condition	
SAR measured	100 mW input power	6.65 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	65.9 W/kg $\pm$ 24.4 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	5.44 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	53.9 W/kg $\pm$ 24.4 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.2 Ω - 6.9 j Ω
Return Loss	- 23.0 dB

APD (Absorbed Power Density)

APD averaged over 1 cm ²	Condition	
APD measured	100 mW input power	291 W/m ²
APD measured	normalized to 1W	2910 W/m ² $\pm$ 29.2 % (k=2)

APD averaged over 4 cm ²	condition	
APD measured	100 mW input power	133 W/m ²
APD measured	normalized to 1W	1330 W/m ² $\pm$ 28.9 % (k=2)

*The reported APD values have been derived using the psSAR1g and psSAR8g.

General Antenna Parameters and Design

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY6 Validation Report for Head TSL

Measurement Report for D6.5GHz-1008, UID 0 -, Channel 6500 (6500.0MHz)

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D6.5GHz	10.0 x 10.0 x 10.0	SN: 1008	-

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Cond. [S/m]	TSL Permittivity
Flat, HSL	5.00	Band	CW,	6500	5.50	6.09	33.3

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
MFP V8.0 Center - 1182	H8BL600-10000V6	EX3DV4 - SN7405, 2023-06-12	DAE4 Sn908, 2023-07-03

Scan Setup

	Zoom Scan
Grid Extents [mm]	22.0 x 22.0 x 22.0
Grid Steps [mm]	3.4 x 3.4 x 1.4
Sensor Surface [mm]	1.4
Graded Grid	Yes
Grading Ratio	1.4
MAIA	N/A
Surface Detection	VMS + 6p
Scan Method	Measured

Measurement Results

	Zoom Scan
Date	2023-09-21, 12:35
psSAR1g [W/Kg]	29.4
psSAR8g [W/Kg]	6.65
psSAR10g [W/Kg]	5.44
Power Drift [dB]	0.02
Power Scaling	Disabled
Scaling Factor [dB]	
TSL Correction	No correction
M2/M1 [%]	50.7
Dist 3dB Peak [mm]	4.6

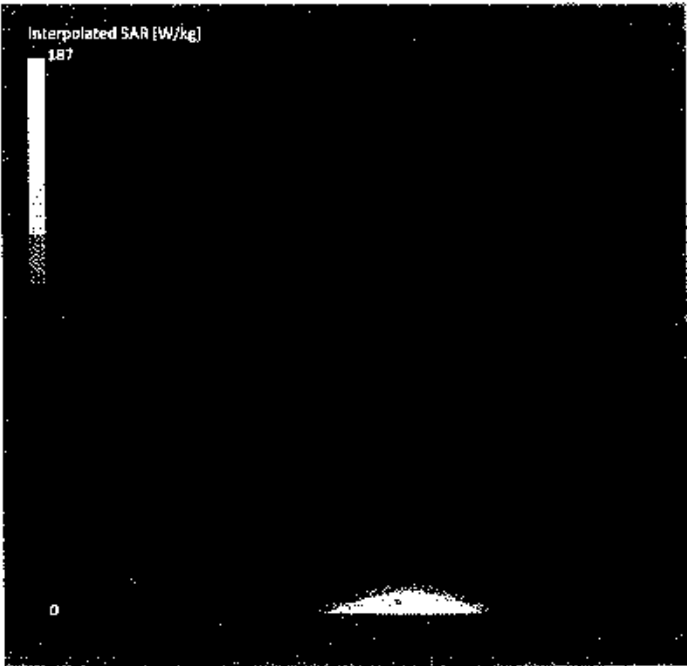

Impedance Measurement Plot for Head TSL


65004-1: Convert/Analyze

1 Active GHz Trace 1 Preprocess 100k points 458k points 100 1 Min/Max State

▶▶▶ 011 Smith (R45W) Scale 1.0000 1 (S1)

Page

1 6.5000000 GHz 10.700 1 6.6000 0 0.0017 pF

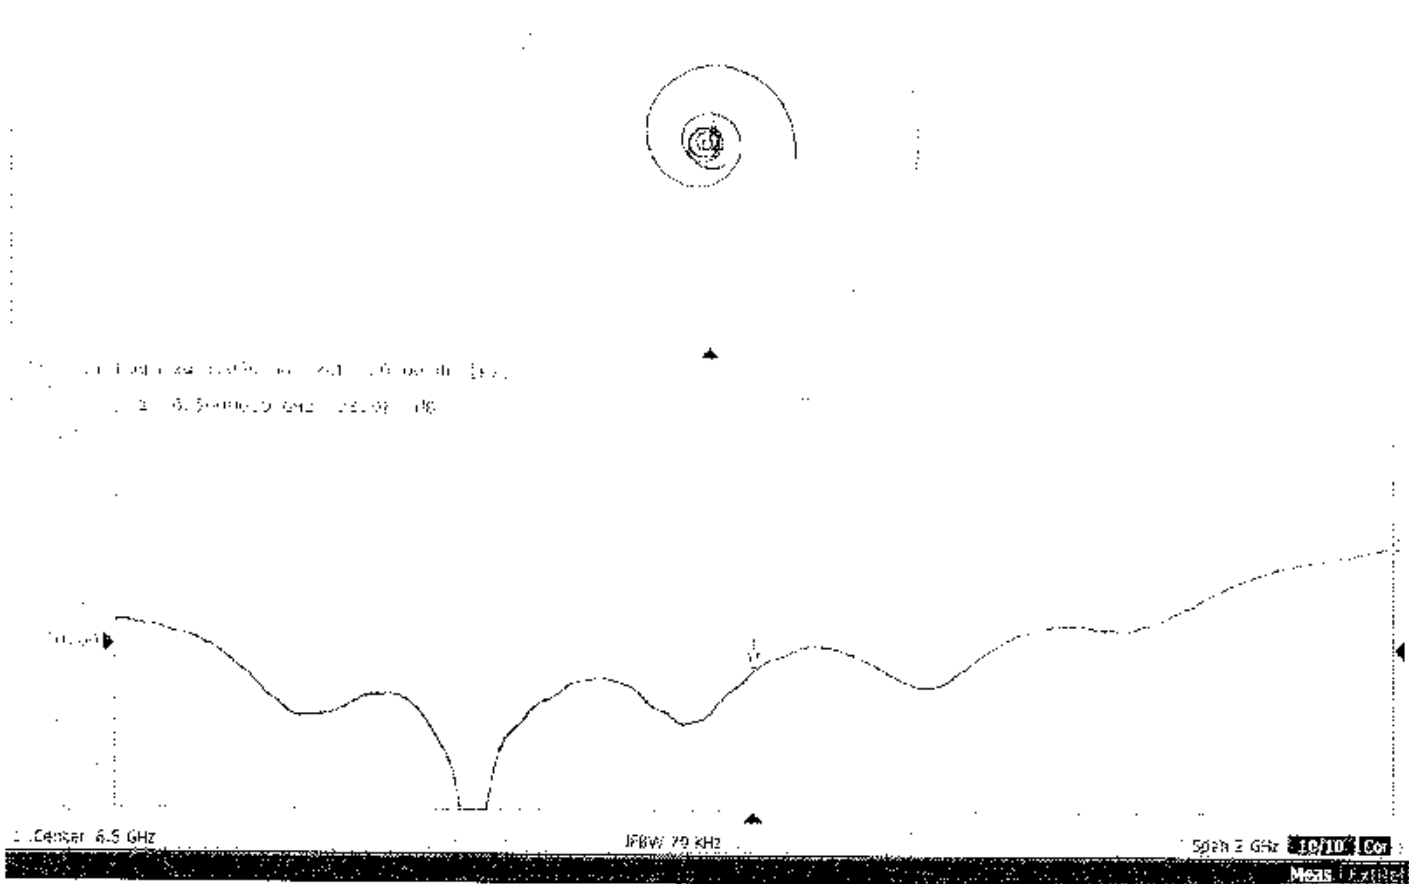

Calibration Laboratory of**Schmid & Partner
Engineering AG**

Zeughausstrasse 43, 8004 Zurich, Switzerland

**S** Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

**The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates**Accreditation No.: **SCS 0108**

Client

B.V. ADT
Taoyuan City

Certificate No.

EX-7472_Oct23**CALIBRATION CERTIFICATE**Object **EX3DV4 - SN:7472**Calibration procedure(s) **QA CAL-01.v10, QA CAL-12.v10, QA CAL-14.v7, QA CAL-23.v6,
QA CAL-25.v8
Calibration procedure for dosimetric E-field probes**Calibration date **October 23, 2023**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3) °C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP2	SN: 104778	30-Mar-23 (No. 217-03804/03805)	Mar-24
Power sensor NRP-Z91	SN: 103241	30-Mar-23 (No. 217-03804)	Mar-24
OCP DAK-3.5 (weighted)	SN: 1249	05-Oct-23 (OCP-DAK3.5-1249_Oct23)	Oct-24
OCP DAK-12	SN: 1016	05-Oct-23 (OCP-DAK12-1016_Oct23)	Oct-24
Reference 20 dB Attenuator	SN: OC2552 (20x)	30-Mar-23 (No. 217-03809)	Mar-24
DAE4	SN: 660	16-Mar-23 (No. DAE4-660_Mar23)	Mar-24
Reference Probe ES3DV2	SN: 3013	06-Jan-23 (No. ES3-3013_Jan23)	Jan-24

Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-22)	In house check: Jun-24
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

	Name	Function
Calibrated by	Jeton Kastrati	Laboratory Technician
Approved by	Sven Kühn	Technical Manager

Signature

Issued: October 23, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of

Schmid & Partner
Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices -- Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal. DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Parameters of Probe: EX3DV4 - SN:7472

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc ($k = 2$)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.59	0.48	0.42	$\pm 10.1\%$
DCP (mV) ^B	99.6	99.6	100.2	$+4.7\%$

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Max dev.	Max Unc ^E $k = 2$
0	CW	X	0.00	0.00	1.00	0.00	176.3	$\pm 3.5\%$	$\pm 4.7\%$
		Y	0.00	0.00	1.00		184.9		
		Z	0.00	0.00	1.00		190.5		
10352	Pulse Waveform (200Hz, 10%)	X	20.00	88.79	18.92	10.00	60.0	$\pm 3.3\%$	$\pm 9.6\%$
		Y	1.46	60.58	6.72		60.0		
		Z	2.27	64.91	9.56		60.0		
10353	Pulse Waveform (200Hz, 20%)	X	20.00	91.18	18.95	6.99	80.0	$\pm 2.3\%$	$\pm 9.6\%$
		Y	0.84	60.00	5.44		80.0		
		Z	1.03	62.21	7.30		80.0		
10354	Pulse Waveform (200Hz, 40%)	X	20.00	99.86	21.71	3.98	95.0	$\pm 1.5\%$	$\pm 9.6\%$
		Y	4.00	68.00	7.00		95.0		
		Z	0.38	60.00	4.92		95.0		
10355	Pulse Waveform (200Hz, 60%)	X	20.00	138.84	37.51	2.22	120.0	$+2.0\%$	$\pm 9.6\%$
		Y	11.53	156.07	5.46		120.0		
		Z	8.66	159.67	15.32		120.0		
10387	QPSK Waveform, 1 MHz	X	2.12	71.77	18.07	1.00	150.0	$\pm 3.6\%$	$\pm 9.6\%$
		Y	1.45	66.38	14.45		150.0		
		Z	1.26	64.93	13.25		150.0		
10388	QPSK Waveform, 10 MHz	X	2.82	73.06	18.56	0.00	150.0	$\pm 1.2\%$	$\pm 9.6\%$
		Y	1.93	66.74	15.15		150.0		
		Z	1.76	65.59	14.33		150.0		
10396	64-QAM Waveform, 100 kHz	X	3.27	73.66	21.00	3.01	150.0	$\pm 1.1\%$	$+9.6\%$
		Y	2.04	65.70	16.67		150.0		
		Z	1.97	65.18	16.28		150.0		
10399	64-QAM Waveform, 40 MHz	X	3.75	68.79	16.97	0.00	150.0	$\pm 2.3\%$	$\pm 9.6\%$
		Y	3.29	66.43	15.44		150.0		
		Z	3.31	66.68	15.42		150.0		
10414	WLAN CCDF, 64-QAM, 40 MHz	X	4.98	66.44	16.24	0.00	150.0	$\pm 4.1\%$	$\pm 9.6\%$
		Y	4.55	65.27	15.35		150.0		
		Z	4.62	65.70	15.49		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Linearization parameter uncertainty for maximum specified field strength.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Parameters of Probe: EX3DV4 - SN:7472

Sensor Model Parameters

	C1 fF	C2 fF	α V^{-1}	T1 $ms V^{-2}$	T2 $ms V^{-1}$	T3 ms	T4 V^{-2}	T5 V^{-1}	T6
x	42.9	324.96	36.75	10.65	0.00	5.08	0.53	0.36	1.01
y	31.1	233.63	35.81	6.22	0.00	4.93	0.22	0.20	1.00
z	29.6	223.83	36.12	3.43	0.00	5.03	0.00	0.24	1.01

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle	-96.3°
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an Area Scan job.

Parameters of Probe: EX3DV4 - SN:7472

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity ^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k = 2)
750	41.9	0.89	10.35	10.35	10.35	0.45	0.85	±12.0%
835	41.5	0.90	10.16	10.16	10.16	0.46	0.80	±12.0%
1450	40.5	1.20	9.10	9.10	9.10	0.35	0.85	±12.0%
1750	40.1	1.37	9.00	9.00	9.00	0.31	0.86	±12.0%
1900	40.0	1.40	8.37	8.37	8.37	0.31	0.86	±12.0%
2000	40.0	1.40	8.29	8.29	8.29	0.29	0.86	±12.0%
2300	39.5	1.67	8.12	8.12	8.12	0.33	0.90	±12.0%
2450	39.2	1.80	7.82	7.82	7.82	0.39	0.90	±12.0%
2600	39.0	1.96	7.61	7.61	7.61	0.38	0.90	±12.0%
3300	38.2	2.71	7.31	7.31	7.31	0.35	1.35	±14.0%
3500	37.9	2.91	7.24	7.24	7.24	0.35	1.35	±14.0%
3700	37.7	3.12	7.19	7.19	7.19	0.40	1.35	±14.0%
3900	37.5	3.32	6.98	6.98	6.98	0.40	1.60	±14.0%
4100	37.2	3.53	6.61	6.61	6.61	0.40	1.60	±14.0%
4200	37.1	3.63	6.54	6.54	6.54	0.40	1.60	±14.0%
4400	36.9	3.84	6.41	6.41	6.41	0.40	1.70	±14.0%
4600	36.7	4.04	6.38	6.38	6.38	0.40	1.70	±14.0%
4800	36.4	4.25	6.34	6.34	6.34	0.40	1.80	±14.0%
4950	36.3	4.40	6.03	6.03	6.03	0.40	1.80	±14.0%
5250	35.9	4.71	5.92	5.92	5.92	0.40	1.80	±14.0%
5600	35.5	5.07	5.04	5.04	5.04	0.40	1.80	±14.0%
5750	35.4	5.22	5.31	5.31	5.31	0.40	1.80	±14.0%

^C Frequency validity above 300 MHz of ±100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ±50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ±110 MHz.

^F The probes are calibrated using tissue simulating liquids (TSL) that deviate for ϵ and σ by less than ±5% from the target values (typically better than ±3%) and are valid for TSL with deviations of up to ±10%. If TSL with deviations from the target of less than ±5% are used, the calibration uncertainty is 11.1% for 0.7 - 3 GHz and 13.1% for 3 - 6 GHz.

^G Alpha/Depth are determined during calibration. SPFAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz and below ±2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Parameters of Probe: EX3DV4 - SN:7472

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity ^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k = 2)
6500	34.5	6.07	5.70	5.70	5.70	0.20	2.50	±18.6%


^C Frequency validity at 6.5 GHz is 600 ± 700 MHz, and ± 700 MHz at or above 7 GHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F The probes are calibrated using tissue simulating liquids (TSL) that deviate for ϵ and σ by less than $\pm 10\%$ from the target values (typically better than $\pm 6\%$) and are valid for TSL with deviations of up to $\pm 10\%$.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than $\pm 1\%$ for frequencies below 3 GHz; below $\pm 2\%$ for frequencies between 3–6 GHz; and below $\pm 4\%$ for frequencies between 6–10 GHz at any distance larger than half the probe tip diameter from the boundary.


Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide:R22)


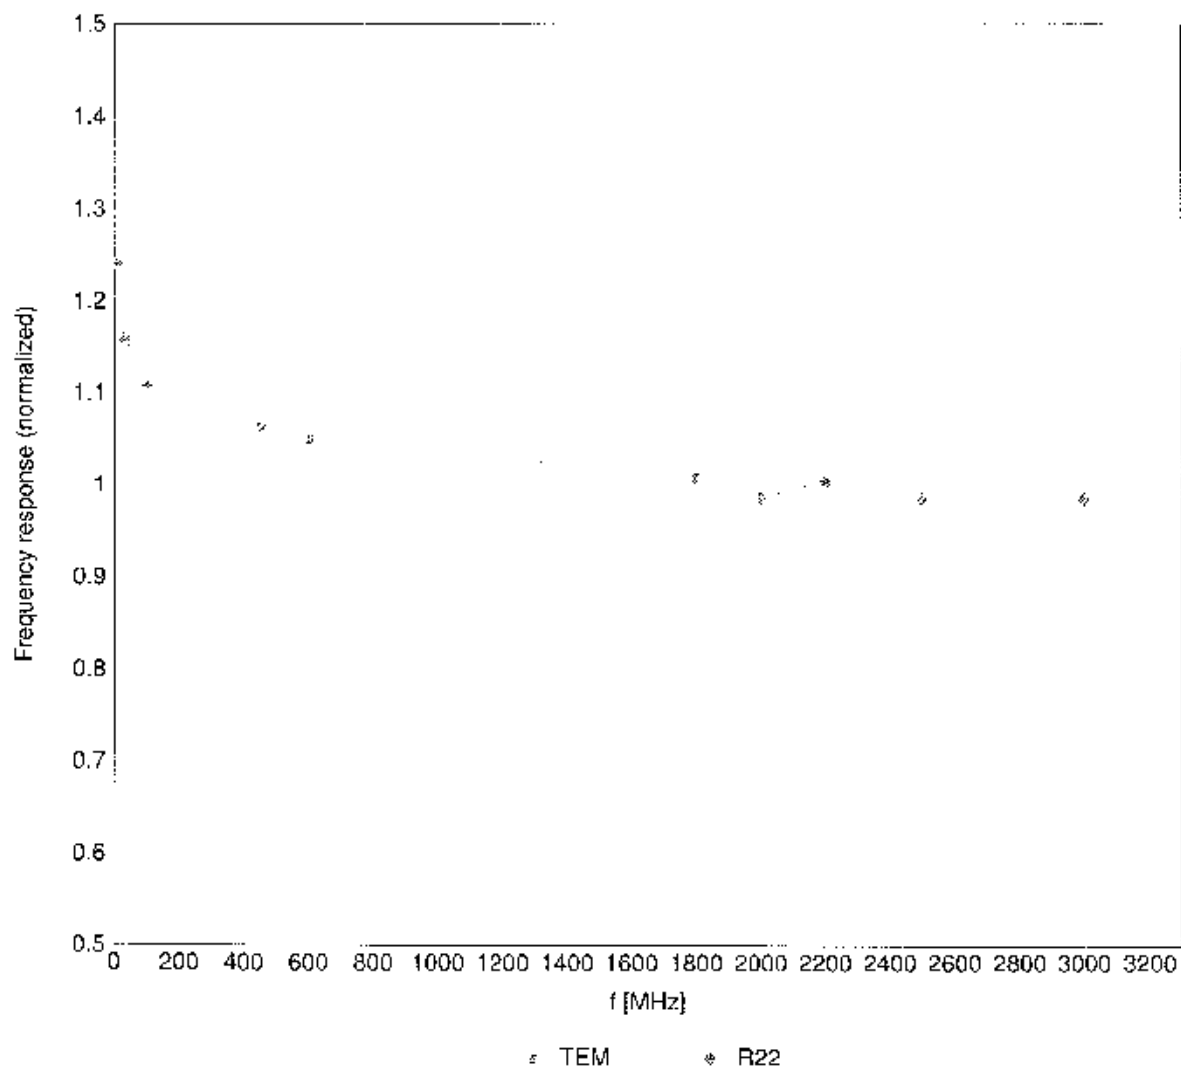


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

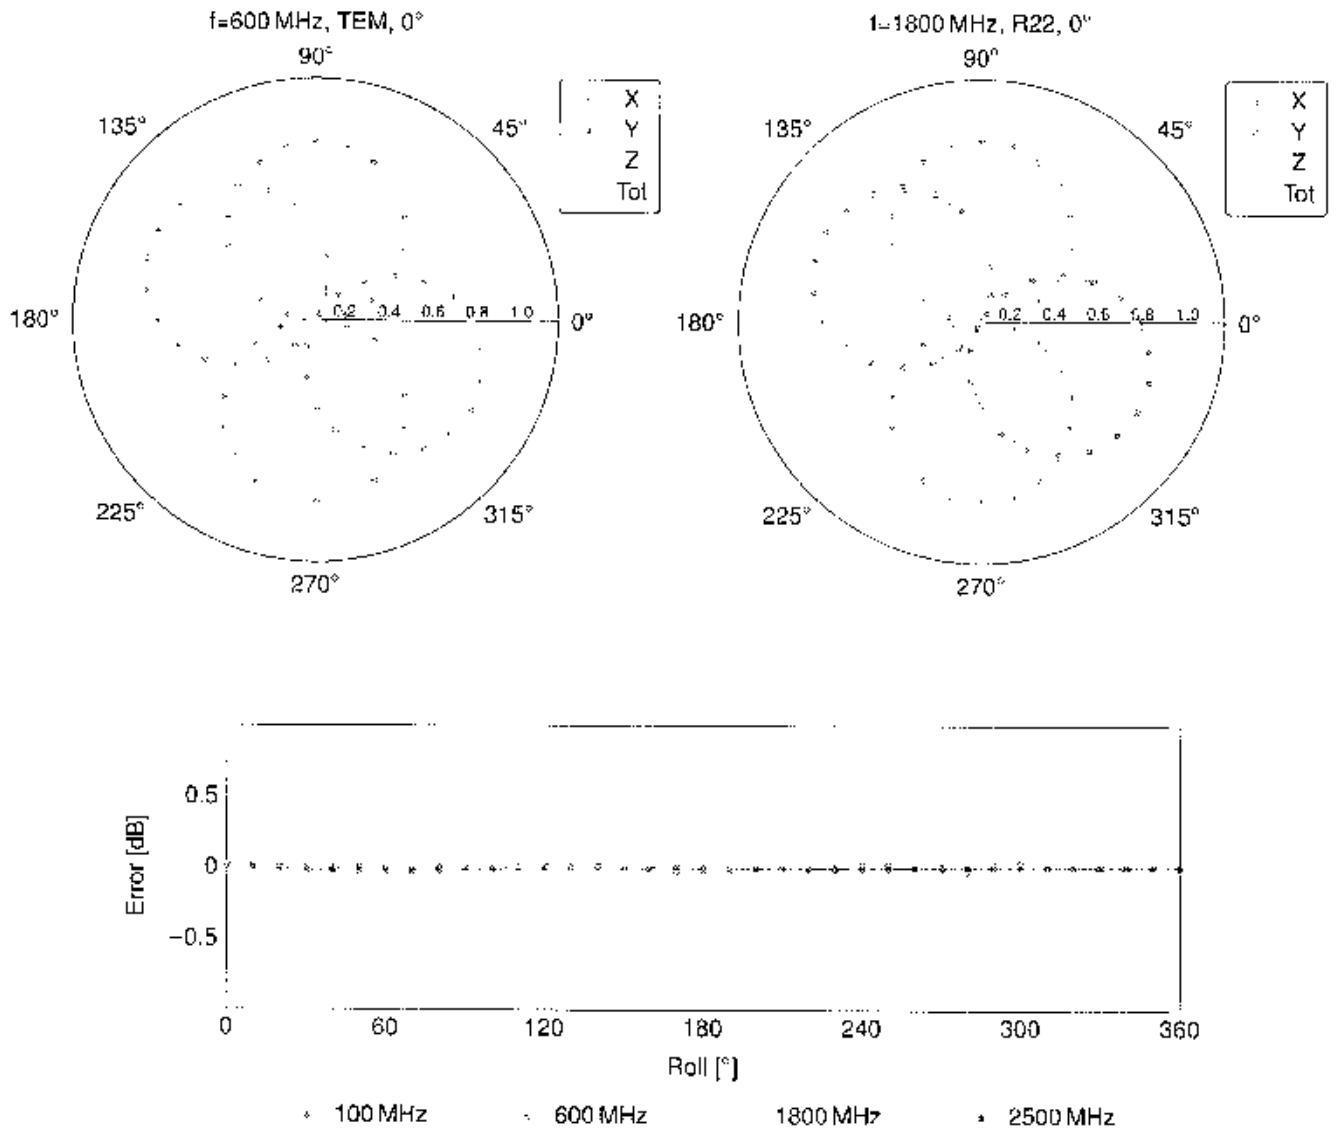


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

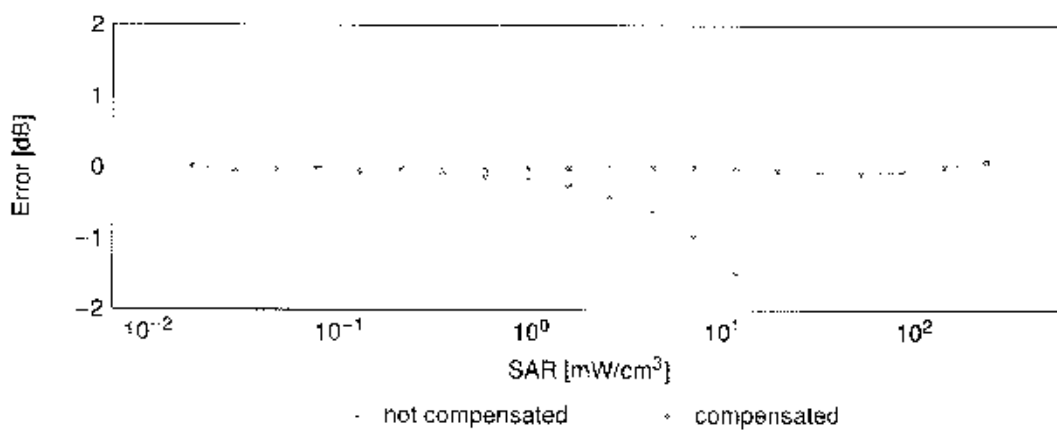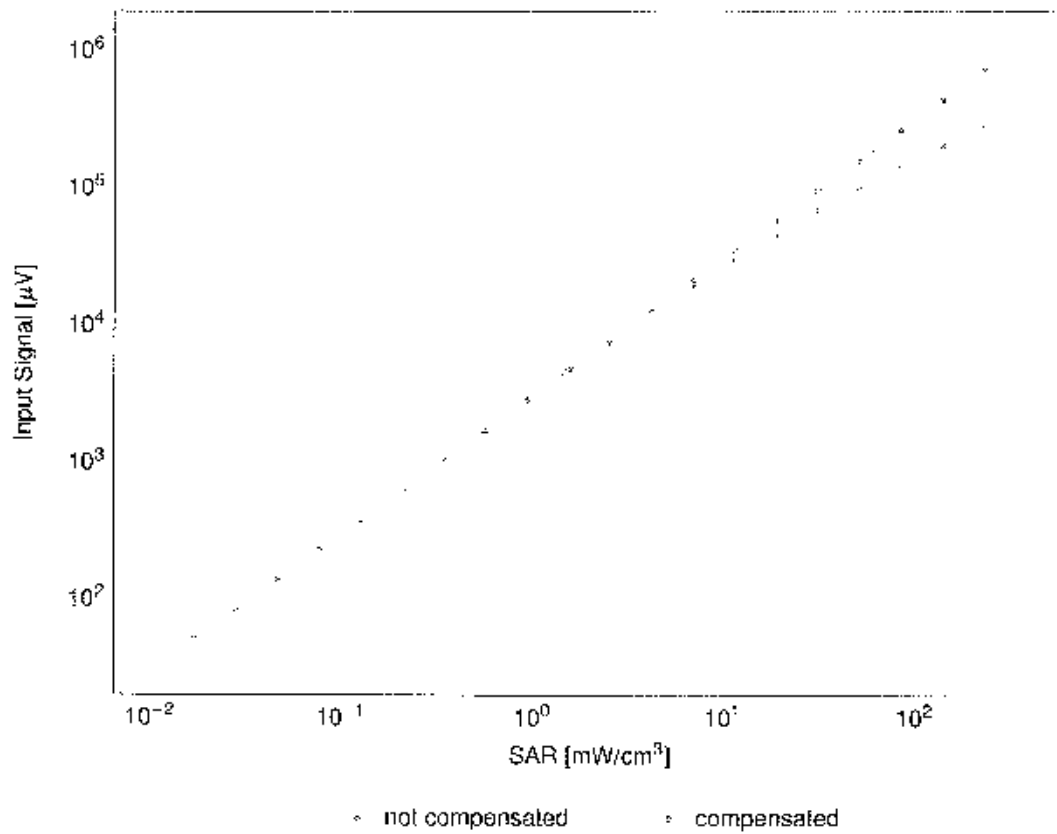Dynamic Range f(SAR_{head})(TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$)


Uncertainty of Linearity Assessment: ±0.6% (k=2)

Conversion Factor Assessment

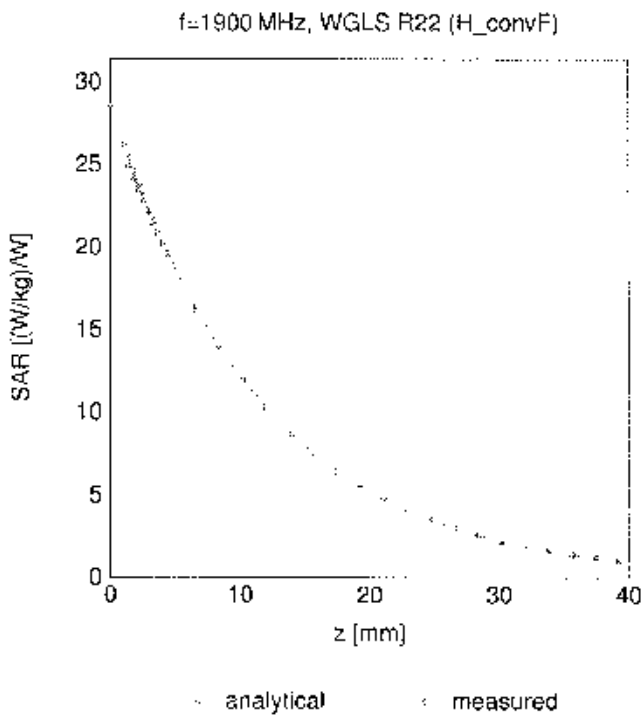

Deviation from Isotropy in Liquid

Error (ϕ, θ), f = 900 MHz

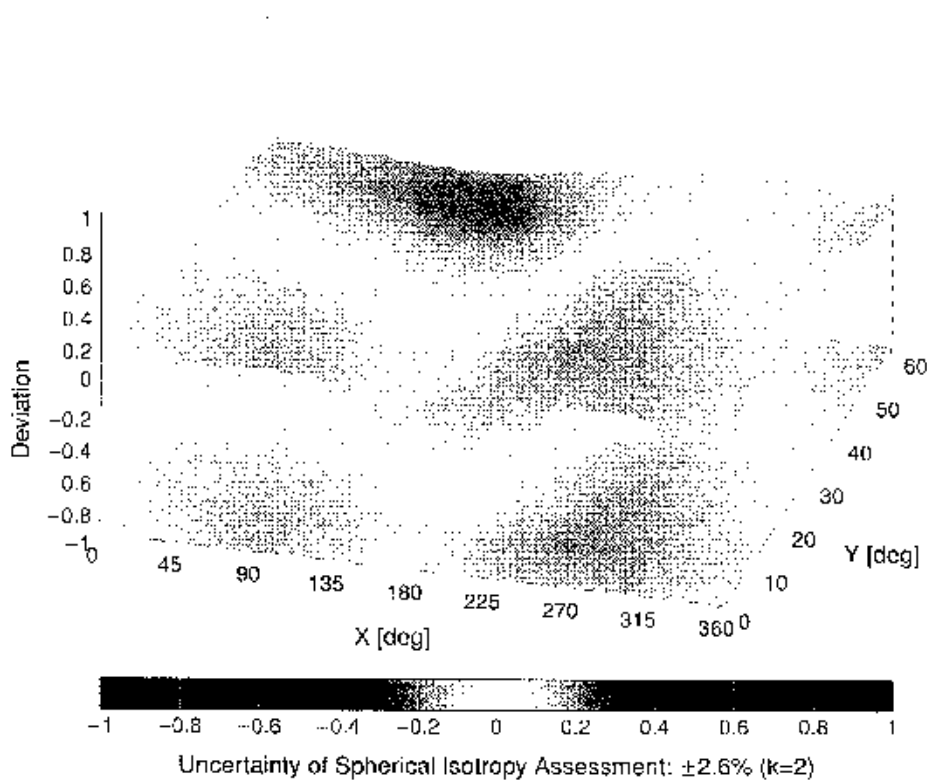

Appendix: Modulation Calibration Parameters

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^B $k = 2$
0		CW	CW	0.00	± 1.7
10010	CAB	SAR Validation (Square, 100 ms, 10 ms)	Test	10.00	± 9.6
10011	CAC	UMTS-FDD (WCDMA)	WCDMA	2.91	± 9.6
10012	CAB	IEEE 802.11b Wi-Fi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	± 9.6
10013	CAB	IEEE 802.11g Wi-Fi 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.45	± 9.6
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	± 9.6
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	± 9.6
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	± 9.6
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	± 9.6
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	± 9.6
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	± 9.6
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	± 9.6
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	± 9.6
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	± 9.6
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	± 9.6
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	± 9.6
10033	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	Bluetooth	7.74	± 9.6
10034	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	Bluetooth	4.53	± 9.6
10035	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	Bluetooth	3.83	± 9.6
10036	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	± 9.6
10037	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	± 9.6
10038	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	Bluetooth	4.10	± 9.6
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	± 9.6
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	AMPS	7.78	± 9.6
10044	CAA	IS-91/EIA/TIA 553 FDD (FDMA, FM)	AMPS	0.00	± 9.6
10048	CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13.80	± 9.6
10049	CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	± 9.6
10056	CAA	UMTS TDD (TD-SCDMA, 1.28 Mbps)	TD-SCDMA	11.01	± 9.6
10058	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	± 9.6
10059	CAB	IEEE 802.11b Wi-Fi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	± 9.6
10060	CAB	IEEE 802.11b Wi-Fi 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	± 9.6
10061	CAB	IEEE 802.11b Wi-Fi 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	± 9.6
10062	CAD	IEEE 802.11a/n Wi-Fi 5 GHz (OFDM, 6 Mbps)	WLAN	8.68	± 9.6
10063	CAD	IEEE 802.11a/n Wi-Fi 5 GHz (OFDM, 9 Mbps)	WLAN	8.63	± 9.6
10064	CAD	IEEE 802.11a/n Wi-Fi 5 GHz (OFDM, 12 Mbps)	WLAN	9.09	± 9.6
10065	CAD	IEEE 802.11a/n Wi-Fi 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	± 9.6
10066	CAD	IEEE 802.11a/n Wi-Fi 5 GHz (OFDM, 24 Mbps)	WLAN	9.36	± 9.6
10067	CAD	IEEE 802.11a/n Wi-Fi 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	± 9.6
10068	CAD	IEEE 802.11a/n Wi-Fi 5 GHz (OFDM, 48 Mbps)	WLAN	10.24	± 9.6
10069	CAD	IEEE 802.11a/n Wi-Fi 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	± 9.6
10071	CAB	IEEE 802.11g Wi-Fi 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	± 9.6
10072	CAB	IEEE 802.11g Wi-Fi 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	± 9.6
10073	CAB	IEEE 802.11g Wi-Fi 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	± 9.6
10074	CAB	IEEE 802.11g Wi-Fi 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	± 9.6
10075	CAB	IEEE 802.11g Wi-Fi 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.77	± 9.6
10076	CAB	IEEE 802.11g Wi-Fi 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	± 9.6
10077	CAB	IEEE 802.11g Wi-Fi 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	± 9.6
10081	CA3	CDMA2000 (1xRTT, RC3)	CDMA2000	3.97	± 9.6
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	AMPS	4.77	± 9.6
10090	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	± 9.6
10097	CAC	UMTS-FDD (HSDPA)	WCDMA	3.98	± 9.6
10098	CAC	UMTS-FDD (HSUPA, Subtest 2)	WCDMA	3.98	± 9.6
10099	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	± 9.6
10102	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	5.67	± 9.6
10101	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	5.42	± 9.6
10102	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-FDD	5.60	± 9.6
10103	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	9.29	± 9.6
10104	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-TDD	9.07	± 9.6
10105	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	10.01	± 9.6
10108	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FDD	5.80	± 9.6
10109	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6
10113	CAH	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-FDD	6.75	± 9.6
10111	CAH	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-FDD	6.44	± 9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 2
10112	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FDD	6.59	±9.6
10113	CAH	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-FDD	6.62	±9.6
10114	CAD	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	±9.6
10115	CAD	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	±9.6
10116	CAD	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	WLAN	8.15	±9.6
10117	CAD	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	±9.6
10118	CAD	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	WLAN	8.59	±9.6
10119	CAD	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	WLAN	8.13	±9.6
10120	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-FDD	6.49	±9.6
10121	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	6.53	±9.6
10122	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-FDD	5.73	±9.6
10123	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDD	6.35	±9.6
10124	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-FDD	6.65	±9.6
10125	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.76	±9.6
10126	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	±9.6
10127	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.72	±9.6
10128	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	8.42	±9.6
10129	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10130	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	9.28	±9.6
10131	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	±9.6
10132	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TDD	10.05	±9.6
10133	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5.75	±9.6
10134	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10135	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FDD	5.79	±9.6
10136	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FDD	6.49	±9.6
10137	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-FDD	6.62	±9.6
10138	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FDD	5.56	±9.6
10139	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDD	5.82	±9.6
10140	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10141	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-FDD	6.58	±9.6
10142	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	5.46	±9.6
10143	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.21	±9.6
10144	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.79	±9.6
10145	CAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-FDD	5.73	±9.6
10146	CAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10147	AAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	±9.6
10148	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	±9.6
10149	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10150	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10151	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-FDD	5.72	±9.6
10152	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10153	CAJ	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-FDD	5.73	±9.6
10154	CAH	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10155	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10156	CAF	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10157	CAF	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-FDD	5.72	±9.6
10158	CAF	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10159	AAF	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10160	CAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-FDD	5.73	±9.6
10161	CAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	6.51	±9.6
10162	AAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10163	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-FDD	5.73	±9.6
10164	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10165	AAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10166	CAD	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	WLAN	8.09	±9.6
10167	CAD	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	±9.6
10168	CAD	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	WLAN	8.21	±9.6
10169	CAD	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	WLAN	8.10	±9.6
10170	CAD	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	WLAN	8.13	±9.6
10171	CAD	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	WLAN	8.27	±9.6
10172	CAD	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	WLAN	8.03	±9.6
10173	CAD	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	WLAN	8.13	±9.6
10174	CAD	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	WLAN	8.27	±9.6
10175	CAD	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	WLAN	8.06	±9.6
10176	CAD	IEEE 802.11n (HT Mixed, 80 Mbps, 16-QAM)	WLAN	8.48	±9.6
10177	CAD	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	WLAN	8.08	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E $k = 2$
10225	CAC	UMTS-FDD (HSPA+)	WCDMA	5.97	±9.6
10226	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.49	±9.6
10227	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.26	±9.6
10228	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.22	±9.6
10229	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10230	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10231	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.19	±9.6
10232	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10233	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10234	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-TDD	9.21	±9.6
10235	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10236	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10237	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	±9.6
10238	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10239	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10240	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.21	±9.6
10241	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.82	±9.6
10242	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-TDD	9.86	±9.6
10243	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.46	±9.6
10244	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-TDD	10.06	±9.6
10245	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.06	±9.6
10246	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	9.30	±9.6
10247	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-TDD	9.91	±9.6
10248	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-TDD	10.09	±9.6
10249	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-TDD	9.29	±9.6
10250	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.81	±9.6
10251	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-TDD	10.17	±9.6
10252	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TDD	9.24	±9.6
10253	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9.80	±9.6
10254	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-TDD	10.14	±9.6
10255	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-TDD	9.20	±9.6
10256	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.96	±9.6
10257	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.08	±9.6
10258	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.34	±9.6
10259	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TDD	9.98	±9.6
10260	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-TDD	9.97	±9.6
10261	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TDD	9.24	±9.6
10262	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-TDD	9.83	±9.6
10263	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-TDD	10.16	±9.6
10264	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	9.23	±9.6
10265	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TDD	9.92	±9.6
10266	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TDD	10.07	±9.6
10267	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TDD	9.30	±9.6
10268	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.06	±9.6
10269	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.13	±9.6
10270	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	±9.6
10274	CAC	UMTS-FDD (HSUPA, Subtest 5, 3GPP RelB 10)	WCDMA	4.87	±9.6
10275	CAC	UMTS-FDD (HSUPA, Subtest 5, 3GPP RelB 4)	WCDMA	3.96	±9.6
10277	CAA	PHS (QPSK)	PHS	11.81	±9.6
10278	CAA	PHS (QPSK, BW 884 MHz, Roll-off 0.5)	PHS	11.81	±9.6
10279	CAA	PHS (QPSK, BW 884 MHz, Roll-off 0.33)	PHS	12.18	±9.6
10290	AAB	CDMA2000, RC1, SQ55, Full Rate	CDMA2000	3.91	±9.6
10291	AAB	CDMA2000, RC3, SQ55, Full Rate	CDMA2000	3.46	±9.6
10292	AAB	CDMA2000, RC3, SQ32, Full Rate	CDMA2000	3.39	±9.6
10293	AAB	CDMA2000, RC3, SQ3, Full Rate	CDMA2000	3.50	±9.6
10295	AAB	CDMA2000, RC1, SQ3, 1/8th Rate 25 fr.	CDMA2000	12.49	±9.6
10297	AAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	5.81	±9.6
10298	AAE	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	±9.6
10299	AAE	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-FDD	6.39	±9.6
10300	AAE	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10301	AAA	IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC)	WiMAX	12.03	±9.6
10302	AAA	IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC, 3 CTRL symbols)	WiMAX	12.57	±9.6
10303	AAA	IEEE 802.16e WiMAX (31:15, 5 ms, 10 MHz, 64QAM, PUSC)	WiMAX	12.52	±9.6
10304	AAA	IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC)	WiMAX	11.86	±9.6
10305	AAA	IEEE 802.16e WiMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC, 15 symbols)	WiMAX	15.24	±9.6
10306	AAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, 64QAM, PUSC, 18 symbols)	WiMAX	14.67	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 2
10307	AAA	IEEE 802.16e WiMAX (29.18, 10 ms, 10 MHz, QPSK, PUSC, 18 symbols)	WIMAX	14.49	+9.6
10308	AAA	IEEE 802.16e WiMAX (29.18, 10 ms, 10 MHz, 16QAM, PUSC)	WIMAX	14.46	+9.6
10309	AAA	IEEE 802.16e WiMAX (29.18, 10 ms, 10 MHz, 16QAM, AMC 2x3, 18 symbols)	WIMAX	14.58	+9.6
10310	AAA	IEEE 802.16e WiMAX (29.18, 10 ms, 10 MHz, QPSK, AMC 2x3, 18 symbols)	WIMAX	14.57	+9.6
10311	AAF	1xE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-FDD	6.06	+9.6
10313	AAA	iDEN 1.3	iDEN	10.51	+9.6
10314	AAA	iDEN 1.6	iDEN	13.48	+9.6
10315	AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	WLAN	1.71	+9.6
10316	AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	+9.6
10317	AAD	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	+9.6
10352	AAA	Pulse Waveform (200Hz, 10%)	Generic	0.00	+9.6
10353	AAA	Pulse Waveform (200Hz, 20%)	Generic	6.99	+9.6
10354	AAA	Pulse Waveform (200Hz, 40%)	Generic	3.98	+9.6
10355	AAA	Pulse Waveform (200Hz, 60%)	Generic	2.22	+9.6
10356	AAA	Pulse Waveform (200Hz, 80%)	Generic	0.97	+9.6
10387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	+9.6
10388	AAA	QPSK Waveform, 10 MHz	Generic	5.22	+9.6
10396	AAA	64-QAM Waveform, 100 kHz	Generic	6.27	+9.6
10399	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	+9.6
10400	AAE	IEEE 802.11ac WiFi (20 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.37	+9.6
10401	AAE	IEEE 802.11ac WiFi (40 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.60	+9.6
10402	AAF	IEEE 802.11ac WiFi (80 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.53	+9.6
10403	AAB	CDMA2000 (1xEV-DO, Rev. 0)	CDMA2000	3.76	+9.6
10404	AAB	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	+9.6
10406	AAB	CDMA2000, RC2, SC32, SCH0, Full Rate	CDMA2000	5.22	+9.6
10410	AAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4)	LTE-TDD	7.82	+9.6
10414	AAA	WLAN CDDF, 64-QAM, 40 MHz	Generic	8.54	+9.6
10415	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	WLAN	1.54	+9.6
10416	AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.23	+9.6
10417	AAC	IEEE 802.11a/n WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.23	+9.6
10418	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	WLAN	8.14	+9.6
10419	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	WLAN	8.19	+9.6
10422	AAC	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	WLAN	8.32	+9.6
10423	AAC	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	WLAN	8.47	+9.6
10424	AAC	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	+9.6
10425	AAC	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	8.41	+9.6
10426	AAC	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	WLAN	8.45	+9.6
10427	AAC	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8.41	+9.6
10430	AAE	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	LTE-FDD	8.28	+9.6
10431	AAE	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	LTE-FDD	8.38	+9.6
10432	AAD	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	LTE-FDD	8.34	+9.6
10433	AAD	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	8.34	+9.6
10434	AAB	W-CDMA (BS Test Model 1, 64 DPCH)	WCDMA	8.60	+9.6
10435	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	+9.6
10447	AAE	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.56	+9.6
10448	AAF	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.53	+9.6
10449	AAD	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.51	+9.6
10450	AAD	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.48	+9.6
10451	AAB	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	WCDMA	7.59	+9.6
10453	AAE	Validation (Square, 10 ms, 1 ms)	Test	10.00	+9.6
10456	AAC	IEEE 802.11ac WiFi (160 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.63	+9.6
10457	AAB	UMTS-FDD (DC-HSDPA)	WCDMA	8.62	+9.6
10458	AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.55	+9.6
10459	AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	6.25	+9.6
10460	AAB	UMTS-FDD (WCDMA, AMR)	WCDMA	2.39	+9.6
10461	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	+9.6
10462	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.30	+9.6
10463	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.56	+9.6
10464	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	+9.6
10465	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.37	+9.6
10466	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	+9.6
10467	AAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	+9.6
10468	AAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.37	+9.6
10469	AAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.56	+9.6
10470	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	+9.6
10471	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	+9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 2
10472	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10473	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10474	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9.6
10475	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10477	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	9.32	±9.6
10478	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10479	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10480	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.18	±9.6
10481	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.45	±9.6
10482	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.71	±9.6
10483	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.39	±9.6
10484	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.47	±9.6
10485	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.59	±9.6
10486	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.38	±9.6
10487	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.00	±9.6
10488	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.70	±9.6
10489	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	±9.6
10490	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±9.6
10491	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10492	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.41	±9.6
10493	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.55	±9.6
10494	AAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10495	AAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.37	±9.6
10496	AAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±9.6
10497	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.67	±9.6
10498	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.40	±9.6
10499	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.68	±9.6
10500	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.57	±9.6
10501	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.44	±9.6
10502	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.52	±9.6
10503	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.72	±9.6
10504	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	±9.6
10505	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±9.6
10506	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10507	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.36	±9.6
10508	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.55	±9.6
10509	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.99	±9.6
10510	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.49	±9.6
10511	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.51	±9.6
10512	AAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10513	AAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.42	±9.6
10514	AAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.45	±9.6
10515	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	WLAN	1.58	±9.6
10516	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	WLAN	1.57	±9.6
10517	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	WLAN	1.58	±9.6
10518	AAC	IEEE 802.11a/n WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	WLAN	8.23	±9.6
10519	AAC	IEEE 802.11a/n WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	WLAN	8.39	±9.6
10520	AAC	IEEE 802.11a/n WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	WLAN	8.12	±9.6
10521	AAC	IEEE 802.11a/n WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	WLAN	7.97	±9.6
10522	AAC	IEEE 802.11a/n WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	WLAN	8.45	±9.6
10523	AAC	IEEE 802.11a/n WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	WLAN	8.06	±9.6
10524	AAC	IEEE 802.11a/n WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	WLAN	8.27	±9.6
10525	AAC	IEEE 802.11ac WiFi (20 MHz, MCS0, 99pc duty cycle)	WLAN	8.36	±9.6
10526	AAC	IEEE 802.11ac WiFi (20 MHz, MCS1, 99pc duty cycle)	WLAN	8.42	±9.6
10527	AAC	IEEE 802.11ac WiFi (20 MHz, MCS2, 99pc duty cycle)	WLAN	8.21	±9.6
10528	AAC	IEEE 802.11ac WiFi (20 MHz, MCS3, 99pc duty cycle)	WLAN	8.36	±9.6
10529	AAC	IEEE 802.11ac WiFi (20 MHz, MCS4, 99pc duty cycle)	WLAN	8.36	±9.6
10530	AAC	IEEE 802.11ac WiFi (20 MHz, MCS6, 99pc duty cycle)	WLAN	8.43	±9.6
10532	AAC	IEEE 802.11ac WiFi (20 MHz, MCS7, 99pc duty cycle)	WLAN	8.29	±9.6
10533	AAC	IEEE 802.11ac WiFi (20 MHz, MCS8, 99pc duty cycle)	WLAN	8.38	±9.6
10534	AAC	IEEE 802.11ac WiFi (40 MHz, MCS0, 99pc duty cycle)	WLAN	8.45	±9.6
10535	AAC	IEEE 802.11ac WiFi (40 MHz, MCS1, 99pc duty cycle)	WLAN	8.45	±9.6
10536	AAC	IEEE 802.11ac WiFi (40 MHz, MCS2, 99pc duty cycle)	WLAN	8.32	±9.6
10537	AAC	IEEE 802.11ac WiFi (40 MHz, MCS3, 99pc duty cycle)	WLAN	8.44	±9.6
10538	AAC	IEEE 802.11ac WiFi (40 MHz, MCS4, 99pc duty cycle)	WLAN	8.54	±9.6
10540	AAC	IEEE 802.11ac WiFi (40 MHz, MCS6, 99pc duty cycle)	WLAN	8.39	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^R k = 2
10541	AAC	IEEE 802.11ac WiFi (40 MHz, MCS7, 99pc duty cycle)	WLAN	8.46	±9.6
10542	AAC	IEEE 802.11ac WiFi (40 MHz, MCS8, 99pc duty cycle)	WLAN	8.65	±9.6
10543	AAC	IEEE 802.11ac WiFi (40 MHz, MCS9, 99pc duty cycle)	WLAN	8.65	±9.6
10544	AAC	IEEE 802.11ac WiFi (80 MHz, MCS0, 99pc duty cycle)	WLAN	8.47	±9.6
10545	AAC	IEEE 802.11ac WiFi (80 MHz, MCS1, 99pc duty cycle)	WLAN	8.55	±9.6
10546	AAC	IEEE 802.11ac WiFi (80 MHz, MCS2, 99pc duty cycle)	WLAN	8.35	±9.6
10547	AAC	IEEE 802.11ac WiFi (80 MHz, MCS3, 99pc duty cycle)	WLAN	8.49	±9.6
10548	AAC	IEEE 802.11ac WiFi (80 MHz, MCS4, 99pc duty cycle)	WLAN	8.37	±9.6
10550	AAC	IEEE 802.11ac WiFi (80 MHz, MCS6, 99pc duty cycle)	WLAN	8.38	±9.6
10551	AAC	IEEE 802.11ac WiFi (80 MHz, MCS7, 99pc duty cycle)	WLAN	8.50	±9.6
10552	AAC	IEEE 802.11ac WiFi (80 MHz, MCS8, 99pc duty cycle)	WLAN	8.42	±9.6
10553	AAC	IEEE 802.11ac WiFi (80 MHz, MCS9, 99pc duty cycle)	WLAN	8.45	±9.6
10554	AAD	IEEE 802.11ac WiFi (160 MHz, MCS0, 99pc duty cycle)	WLAN	8.48	±9.6
10555	AAD	IEEE 802.11ac WiFi (160 MHz, MCS1, 99pc duty cycle)	WLAN	8.47	±9.6
10556	AAD	IEEE 802.11ac WiFi (160 MHz, MCS2, 99pc duty cycle)	WLAN	8.50	±9.6
10557	AAD	IEEE 802.11ac WiFi (160 MHz, MCS3, 99pc duty cycle)	WLAN	8.52	±9.6
10558	AAD	IEEE 802.11ac WiFi (160 MHz, MCS4, 99pc duty cycle)	WLAN	8.61	±9.6
10560	AAD	IEEE 802.11ac WiFi (160 MHz, MCS6, 99pc duty cycle)	WLAN	8.73	±9.6
10561	AAD	IEEE 802.11ac WiFi (160 MHz, MCS7, 99pc duty cycle)	WLAN	8.56	±9.6
10562	AAD	IEEE 802.11ac WiFi (160 MHz, MCS8, 99pc duty cycle)	WLAN	8.69	±9.6
10563	AAD	IEEE 802.11ac WiFi (160 MHz, MCS9, 99pc duty cycle)	WLAN	8.77	±9.6
10564	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	WLAN	8.25	±9.6
10565	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle)	WLAN	8.45	±9.6
10566	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle)	WLAN	8.13	±9.6
10567	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	WLAN	8.00	±9.6
10569	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle)	WLAN	8.37	±9.6
10569	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle)	WLAN	8.10	±9.6
10570	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	WLAN	8.30	±9.6
10571	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	WLAN	1.99	±9.6
10572	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	WLAN	1.99	±9.6
10573	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	WLAN	1.98	±9.6
10574	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	WLAN	1.98	±9.6
10575	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8.59	±9.6
10576	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	WLAN	8.60	±9.6
10577	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	WLAN	8.70	±9.6
10578	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	WLAN	8.49	±9.6
10579	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	WLAN	8.36	±9.6
10580	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	WLAN	8.76	±9.6
10581	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	WLAN	8.35	±9.6
10582	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	WLAN	8.67	±9.6
10583	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8.59	±9.6
10584	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	WLAN	8.60	±9.6
10585	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	WLAN	8.70	±9.6
10586	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	WLAN	8.49	±9.6
10587	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	WLAN	8.36	±9.6
10588	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	WLAN	8.76	±9.6
10589	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	WLAN	8.35	±9.6
10590	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	WLAN	8.67	±9.6
10591	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS0, 90pc duty cycle)	WLAN	8.63	±9.6
10592	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS1, 90pc duty cycle)	WLAN	8.79	±9.6
10593	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS2, 90pc duty cycle)	WLAN	8.64	±9.6
10594	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS3, 90pc duty cycle)	WLAN	8.74	±9.6
10595	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS4, 90pc duty cycle)	WLAN	8.74	±9.6
10596	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS5, 90pc duty cycle)	WLAN	8.71	±9.6
10597	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS6, 90pc duty cycle)	WLAN	8.72	±9.6
10598	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS7, 90pc duty cycle)	WLAN	8.50	±9.6
10599	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS0, 90pc duty cycle)	WLAN	8.79	±9.6
10600	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS1, 90pc duty cycle)	WLAN	8.88	±9.6
10601	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS2, 90pc duty cycle)	WLAN	8.82	±9.6
10602	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS3, 90pc duty cycle)	WLAN	8.94	±9.6
10603	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS4, 90pc duty cycle)	WLAN	9.03	±9.6
10604	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS5, 90pc duty cycle)	WLAN	8.76	±9.6
10605	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS6, 90pc duty cycle)	WLAN	8.97	±9.6
10606	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS7, 90pc duty cycle)	WLAN	8.82	±9.6
10607	AAC	IEEE 802.11ac WiFi (20 MHz, MCS0, 90pc duty cycle)	WLAN	8.64	±9.6
10608	AAC	IEEE 802.11ac WiFi (20 MHz, MCS1, 90pc duty cycle)	WLAN	8.77	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 2
10609	AAC	IEEE 802.11ac WiFi (20 MHz, MCS2, 90pc duty cycle)	WLAN	8.57	+9.6
10610	AAC	IEEE 802.11ac WiFi (20 MHz, MCS3, 90pc duty cycle)	WLAN	8.78	+9.6
10611	AAC	IEEE 802.11ac WiFi (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.70	+9.6
10612	AAC	IEEE 802.11ac WiFi (20 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	+9.6
10613	AAC	IEEE 802.11ac WiFi (20 MHz, MCS6, 90pc duty cycle)	WLAN	8.94	+9.6
10614	AAC	IEEE 802.11ac WiFi (20 MHz, MCS7, 90pc duty cycle)	WLAN	8.59	+9.6
10615	AAC	IEEE 802.11ac WiFi (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	+9.6
10616	AAC	IEEE 802.11ac WiFi (40 MHz, MCS0, 90pc duty cycle)	WLAN	8.82	+9.6
10617	AAC	IEEE 802.11ac WiFi (40 MHz, MCS1, 90pc duty cycle)	WLAN	8.81	+9.6
10618	AAC	IEEE 802.11ac WiFi (40 MHz, MCS2, 90pc duty cycle)	WLAN	8.58	+9.6
10619	AAC	IEEE 802.11ac WiFi (40 MHz, MCS3, 90pc duty cycle)	WLAN	8.86	+9.6
10620	AAC	IEEE 802.11ac WiFi (40 MHz, MCS4, 90pc duty cycle)	WLAN	8.87	+9.6
10621	AAC	IEEE 802.11ac WiFi (40 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	+9.6
10622	AAC	IEEE 802.11ac WiFi (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.68	+9.6
10623	AAC	IEEE 802.11ac WiFi (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.82	+9.6
10624	AAC	IEEE 802.11ac WiFi (40 MHz, MCS8, 90pc duty cycle)	WLAN	8.96	+9.6
10625	AAC	IEEE 802.11ac WiFi (40 MHz, MCS9, 90pc duty cycle)	WLAN	8.96	+9.6
10626	AAC	IEEE 802.11ac WiFi (80 MHz, MCS0, 90pc duty cycle)	WLAN	8.83	+9.6
10627	AAC	IEEE 802.11ac WiFi (80 MHz, MCS1, 90pc duty cycle)	WLAN	8.88	+9.6
10628	AAC	IEEE 802.11ac WiFi (80 MHz, MCS2, 90pc duty cycle)	WLAN	8.7	+9.6
10629	AAC	IEEE 802.11ac WiFi (80 MHz, MCS3, 90pc duty cycle)	WLAN	8.85	+9.6
10630	AAC	IEEE 802.11ac WiFi (80 MHz, MCS4, 90pc duty cycle)	WLAN	8.72	+9.6
10631	AAC	IEEE 802.11ac WiFi (80 MHz, MCS5, 90pc duty cycle)	WLAN	8.81	+9.6
10632	AAC	IEEE 802.11ac WiFi (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.74	+9.6
10633	AAC	IEEE 802.11ac WiFi (80 MHz, MCS7, 90pc duty cycle)	WLAN	8.83	+9.6
10634	AAC	IEEE 802.11ac WiFi (80 MHz, MCS8, 90pc duty cycle)	WLAN	8.80	+9.6
10635	AAC	IEEE 802.11ac WiFi (80 MHz, MCS9, 90pc duty cycle)	WLAN	8.81	+9.6
10636	AAD	IEEE 802.11ac WiFi (160 MHz, MCS0, 90pc duty cycle)	WLAN	8.83	+9.6
10637	AAD	IEEE 802.11ac WiFi (160 MHz, MCS1, 90pc duty cycle)	WLAN	8.79	+9.6
10638	AAD	IEEE 802.11ac WiFi (160 MHz, MCS2, 90pc duty cycle)	WLAN	8.86	+9.6
10639	AAD	IEEE 802.11ac WiFi (160 MHz, MCS3, 90pc duty cycle)	WLAN	8.85	+9.6
10640	AAD	IEEE 802.11ac WiFi (160 MHz, MCS4, 90pc duty cycle)	WLAN	8.98	+9.6
10641	AAD	IEEE 802.11ac WiFi (160 MHz, MCS5, 90pc duty cycle)	WLAN	9.08	+9.6
10642	AAD	IEEE 802.11ac WiFi (160 MHz, MCS6, 90pc duty cycle)	WLAN	9.06	+9.6
10643	AAD	IEEE 802.11ac WiFi (160 MHz, MCS7, 90pc duty cycle)	WLAN	8.89	+9.6
10644	AAD	IEEE 802.11ac WiFi (160 MHz, MCS8, 90pc duty cycle)	WLAN	9.05	+9.6
10645	AAD	IEEE 802.11ac WiFi (160 MHz, MCS9, 90pc duty cycle)	WLAN	9.11	+9.6
10646	AAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2.7)	LTE-TDD	11.96	+9.6
10647	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2.7)	LTE-TDD	11.96	+9.6
10648	AAA	CDMA2000 (1x Advanced)	CDMA2000	3.45	+9.6
10652	AAF	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.91	+9.6
10653	AAF	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.42	+9.6
10654	AAE	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.96	+9.6
10655	AAF	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.21	+9.6
10658	AAB	Pulse Waveform (200Hz, 10%)	Test	10.00	+9.6
10659	AAB	Pulse Waveform (200Hz, 20%)	Test	6.99	+9.6
10660	AAB	Pulse Waveform (200Hz, 40%)	Test	3.99	+9.6
10661	AAB	Pulse Waveform (200Hz, 60%)	Test	2.22	+9.6
10662	AAB	Pulse Waveform (200Hz, 80%)	Test	0.97	+9.6
10670	AAA	Bluetooth Low Energy	Bluetooth	2.19	+9.6
10671	AAC	IEEE 802.11ax (20 MHz, MCS0, 90pc duty cycle)	WLAN	9.09	+9.6
10672	AAC	IEEE 802.11ax (20 MHz, MCS1, 90pc duty cycle)	WLAN	8.57	+9.6
10673	AAC	IEEE 802.11ax (20 MHz, MCS2, 90pc duty cycle)	WLAN	8.76	+9.6
10674	AAC	IEEE 802.11ax (20 MHz, MCS3, 90pc duty cycle)	WLAN	8.74	+9.6
10675	AAC	IEEE 802.11ax (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.90	+9.6
10676	AAC	IEEE 802.11ax (20 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	+9.6
10677	AAC	IEEE 802.11ax (20 MHz, MCS6, 90pc duty cycle)	WLAN	8.73	+9.6
10678	AAC	IEEE 802.11ax (20 MHz, MCS7, 90pc duty cycle)	WLAN	8.76	+9.6
10679	AAC	IEEE 802.11ax (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.89	+9.6
10680	AAC	IEEE 802.11ax (20 MHz, MCS9, 90pc duty cycle)	WLAN	8.80	+9.6
10681	AAC	IEEE 802.11ax (20 MHz, MCS10, 90pc duty cycle)	WLAN	8.82	+9.6
10682	AAC	IEEE 802.11ax (20 MHz, MCS11, 90pc duty cycle)	WLAN	8.83	+9.6
10683	AAC	IEEE 802.11ax (20 MHz, MCS0, 99pc duty cycle)	WLAN	8.42	+9.6
10684	AAC	IEEE 802.11ax (20 MHz, MCS1, 99pc duty cycle)	WLAN	8.26	+9.6
10685	AAC	IEEE 802.11ax (20 MHz, MCS2, 99pc duty cycle)	WLAN	8.33	+9.6
10686	AAC	IEEE 802.11ax (20 MHz, MCS3, 99pc duty cycle)	WLAN	8.28	+9.6

UID	Rev	Communication System Name	Group	PAP (dB)	Unc ^E k = 2
10687	AAC	IEEE 802.11ax (20 MHz, MCS4, 99pc duty cycle)	WLAN	8.45	±9.6
10688	AAC	IEEE 802.11ax (20 MHz, MCS5, 99pc duty cycle)	WLAN	8.29	±9.6
10689	AAC	IEEE 802.11ax (20 MHz, MCS6, 99pc duty cycle)	WLAN	8.55	±9.6
10690	AAC	IEEE 802.11ax (20 MHz, MCS7, 99pc duty cycle)	WLAN	8.29	±9.6
10691	AAC	IEEE 802.11ax (20 MHz, MCS8, 99pc duty cycle)	WLAN	8.25	±9.6
10692	AAC	IEEE 802.11ax (20 MHz, MCS9, 99pc duty cycle)	WLAN	8.29	±9.6
10693	AAC	IEEE 802.11ax (20 MHz, MCS10, 99pc duty cycle)	WLAN	8.25	±9.6
10694	AAC	IEEE 802.11ax (20 MHz, MCS11, 99pc duty cycle)	WLAN	8.57	±9.6
10695	AAC	IEEE 802.11ax (40 MHz, MCS0, 90pc duty cycle)	WLAN	8.78	±9.6
10696	AAC	IEEE 802.11ax (40 MHz, MCS1, 90pc duty cycle)	WLAN	8.91	±9.6
10697	AAC	IEEE 802.11ax (40 MHz, MCS2, 90pc duty cycle)	WLAN	8.61	±9.6
10698	AAC	IEEE 802.11ax (40 MHz, MCS3, 90pc duty cycle)	WLAN	8.89	±9.6
10699	AAC	IEEE 802.11ax (40 MHz, MCS4, 90pc duty cycle)	WLAN	8.82	±9.6
10700	AAC	IEEE 802.11ax (40 MHz, MCS5, 90pc duty cycle)	WLAN	8.73	±9.6
10701	AAC	IEEE 802.11ax (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.86	±9.6
10702	AAC	IEEE 802.11ax (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.70	±9.6
10703	AAC	IEEE 802.11ax (40 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±9.6
10704	AAC	IEEE 802.11ax (40 MHz, MCS9, 90pc duty cycle)	WLAN	8.56	±9.6
10705	AAC	IEEE 802.11ax (40 MHz, MCS10, 90pc duty cycle)	WLAN	8.69	±9.6
10706	AAC	IEEE 802.11ax (40 MHz, MCS11, 90pc duty cycle)	WLAN	8.66	±9.6
10707	AAC	IEEE 802.11ax (40 MHz, MCS0, 99pc duty cycle)	WLAN	8.32	±9.6
10708	AAC	IEEE 802.11ax (40 MHz, MCS1, 99pc duty cycle)	WLAN	8.55	±9.6
10709	AAC	IEEE 802.11ax (40 MHz, MCS2, 99pc duty cycle)	WLAN	8.33	±9.6
10710	AAC	IEEE 802.11ax (40 MHz, MCS3, 99pc duty cycle)	WLAN	8.29	±9.6
10711	AAC	IEEE 802.11ax (40 MHz, MCS4, 99pc duty cycle)	WLAN	8.39	±9.6
10712	AAC	IEEE 802.11ax (40 MHz, MCS5, 99pc duty cycle)	WLAN	8.67	±9.6
10713	AAC	IEEE 802.11ax (40 MHz, MCS6, 99pc duty cycle)	WLAN	8.33	±9.6
10714	AAC	IEEE 802.11ax (40 MHz, MCS7, 99pc duty cycle)	WLAN	8.26	±9.6
10715	AAC	IEEE 802.11ax (40 MHz, MCS8, 99pc duty cycle)	WLAN	8.45	±9.6
10716	AAC	IEEE 802.11ax (40 MHz, MCS9, 99pc duty cycle)	WLAN	8.30	±9.6
10717	AAC	IEEE 802.11ax (40 MHz, MCS10, 99pc duty cycle)	WLAN	8.48	±9.6
10718	AAC	IEEE 802.11ax (40 MHz, MCS11, 99pc duty cycle)	WLAN	8.24	±9.6
10719	AAC	IEEE 802.11ax (80 MHz, MCS0, 90pc duty cycle)	WLAN	8.81	±9.6
10720	AAC	IEEE 802.11ax (80 MHz, MCS1, 90pc duty cycle)	WLAN	8.87	±9.6
10721	AAC	IEEE 802.11ax (80 MHz, MCS2, 90pc duty cycle)	WLAN	8.76	±9.6
10722	AAC	IEEE 802.11ax (80 MHz, MCS3, 90pc duty cycle)	WLAN	8.55	±9.6
10723	AAC	IEEE 802.11ax (80 MHz, MCS4, 90pc duty cycle)	WLAN	8.70	±9.6
10724	AAC	IEEE 802.11ax (80 MHz, MCS5, 90pc duty cycle)	WLAN	8.90	±9.6
10725	AAC	IEEE 802.11ax (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.74	±9.6
10726	AAC	IEEE 802.11ax (80 MHz, MCS7, 90pc duty cycle)	WLAN	8.72	±9.6
10727	AAC	IEEE 802.11ax (80 MHz, MCS8, 90pc duty cycle)	WLAN	8.66	±9.6
10728	AAC	IEEE 802.11ax (80 MHz, MCS9, 90pc duty cycle)	WLAN	8.65	±9.6
10729	AAC	IEEE 802.11ax (80 MHz, MCS10, 90pc duty cycle)	WLAN	8.64	±9.6
10730	AAC	IEEE 802.11ax (80 MHz, MCS11, 90pc duty cycle)	WLAN	8.67	±9.6
10731	AAC	IEEE 802.11ax (80 MHz, MCS0, 99pc duty cycle)	WLAN	8.42	±9.6
10732	AAC	IEEE 802.11ax (80 MHz, MCS1, 99pc duty cycle)	WLAN	8.48	±9.6
10733	AAC	IEEE 802.11ax (80 MHz, MCS2, 99pc duty cycle)	WLAN	8.40	±9.6
10734	AAC	IEEE 802.11ax (80 MHz, MCS3, 99pc duty cycle)	WLAN	8.25	±9.6
10735	AAC	IEEE 802.11ax (80 MHz, MCS4, 99pc duty cycle)	WLAN	8.33	±9.6
10736	AAC	IEEE 802.11ax (80 MHz, MCS5, 99pc duty cycle)	WLAN	8.27	±9.6
10737	AAC	IEEE 802.11ax (80 MHz, MCS6, 99pc duty cycle)	WLAN	8.36	±9.6
10738	AAC	IEEE 802.11ax (80 MHz, MCS7, 99pc duty cycle)	WLAN	8.42	±9.6
10739	AAC	IEEE 802.11ax (80 MHz, MCS8, 99pc duty cycle)	WLAN	8.29	±9.6
10740	AAC	IEEE 802.11ax (80 MHz, MCS9, 99pc duty cycle)	WLAN	8.48	±9.6
10741	AAC	IEEE 802.11ax (80 MHz, MCS10, 99pc duty cycle)	WLAN	8.40	±9.6
10742	AAC	IEEE 802.11ax (80 MHz, MCS11, 99pc duty cycle)	WLAN	8.43	±9.6
10743	AAC	IEEE 802.11ax (160 MHz, MCS0, 90pc duty cycle)	WLAN	8.94	±9.6
10744	AAC	IEEE 802.11ax (160 MHz, MCS1, 90pc duty cycle)	WLAN	8.16	±9.6
10745	AAC	IEEE 802.11ax (160 MHz, MCS2, 90pc duty cycle)	WLAN	8.83	±9.6
10746	AAC	IEEE 802.11ax (160 MHz, MCS3, 90pc duty cycle)	WLAN	9.11	±9.6
10747	AAC	IEEE 802.11ax (160 MHz, MCS4, 90pc duty cycle)	WLAN	9.04	±9.6
10748	AAC	IEEE 802.11ax (160 MHz, MCS5, 90pc duty cycle)	WLAN	8.93	±9.6
10749	AAC	IEEE 802.11ax (160 MHz, MCS6, 90pc duty cycle)	WLAN	8.90	±9.6
10750	AAC	IEEE 802.11ax (160 MHz, MCS7, 90pc duty cycle)	WLAN	8.79	±9.6
10751	AAC	IEEE 802.11ax (160 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±9.6
10752	AAC	IEEE 802.11ax (160 MHz, MCS9, 90pc duty cycle)	WLAN	8.81	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 2
10753	AAC	IEEE 802.11ax (160 MHz, MCS10, 99pc duty cycle)	WLAN	9.00	-9.6
10754	AAC	IEEE 802.11ax (160 MHz, MCS11, 99pc duty cycle)	WLAN	8.94	±9.6
10755	AAC	IEEE 802.11ax (160 MHz, MCS0, 99pc duty cycle)	WLAN	8.64	±9.6
10756	AAC	IEEE 802.11ax (160 MHz, MCS1, 99pc duty cycle)	WLAN	8.77	±9.6
10757	AAC	IEEE 802.11ax (160 MHz, MCS2, 99pc duty cycle)	WLAN	8.77	±9.6
10758	AAC	IEEE 802.11ax (160 MHz, MCS3, 99pc duty cycle)	WLAN	8.69	±9.6
10759	AAC	IEEE 802.11ax (160 MHz, MCS4, 99pc duty cycle)	WLAN	8.58	±9.6
10760	AAC	IEEE 802.11ax (160 MHz, MCS5, 99pc duty cycle)	WLAN	8.49	±9.6
10761	AAC	IEEE 802.11ax (160 MHz, MCS6, 99pc duty cycle)	WLAN	8.58	±9.6
10762	AAC	IEEE 802.11ax (160 MHz, MCS7, 99pc duty cycle)	WLAN	8.49	±9.6
10763	AAC	IEEE 802.11ax (160 MHz, MCS8, 99pc duty cycle)	WLAN	8.53	±9.6
10764	AAC	IEEE 802.11ax (160 MHz, MCS9, 99pc duty cycle)	WLAN	8.54	±9.6
10765	AAC	IEEE 802.11ax (160 MHz, MCS10, 99pc duty cycle)	WLAN	8.54	±9.6
10766	AAC	IEEE 802.11ax (160 MHz, MCS11, 99pc duty cycle)	WLAN	9.51	±9.6
10767	AAE	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	7.99	±9.6
10768	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	±9.6
10769	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	±9.6
10770	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±9.6
10771	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±9.6
10772	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.23	±9.6
10773	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.03	±9.6
10774	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±9.6
10775	AAD	5G NR (CP-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	±9.6
10776	AAD	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.30	±9.6
10777	AAC	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.30	±9.6
10778	AAD	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.34	±9.6
10779	AAC	5G NR (CP-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.42	±9.6
10780	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	±9.6
10781	AAD	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	±9.6
10782	AAD	5G NR (CP-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.43	±9.6
10783	AAE	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	±9.6
10784	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.29	±9.6
10785	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.40	±9.6
10786	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.35	±9.6
10787	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.44	±9.6
10788	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	±9.6
10789	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.37	±9.6
10790	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	±9.6
10791	AAE	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.83	±9.6
10792	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.92	±9.6
10793	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.95	±9.6
10794	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	±9.6
10795	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.84	±9.6
10796	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	±9.6
10797	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.01	±9.6
10798	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.89	±9.6
10799	AAD	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	-9.6
10801	AAD	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.89	±9.6
10802	AAD	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.87	±9.6
10803	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	±9.6
10805	AAD	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10806	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.37	±9.6
10809	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10810	AAD	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10812	AAD	5G NR (CP-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	±9.6
10817	AAE	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	±9.6
10818	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10819	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.33	±9.6
10820	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.30	±9.6
10821	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±9.6
10822	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±9.6
10823	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.36	±9.6
10824	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.39	±9.6
10825	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±9.6
10827	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.42	-9.6
10828	AAD	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.43	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k - 2
10829	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.40	±9.6
10830	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.83	±9.6
10831	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.73	±9.6
10832	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.74	±9.6
10833	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
10834	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.75	±9.6
10835	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
10836	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.65	±9.6
10837	AAD	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.68	±9.6
10838	AAD	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
10840	AAD	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.67	±9.6
10841	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.71	±9.6
10843	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.49	±9.6
10844	AAD	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.31	±9.6
10846	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10854	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±9.6
10855	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	9.36	±9.6
10856	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	±9.6
10857	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	6.35	±9.6
10858	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	±9.6
10859	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±9.6
10860	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10861	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.40	±9.6
10863	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10864	AAD	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	±9.6
10865	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10866	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10868	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.89	±9.6
10869	AAF	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	±9.6
10870	AAE	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.86	±9.6
10871	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	5.75	±9.6
10872	AAE	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.52	±9.6
10873	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	±9.6
10874	AAE	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	±9.6
10875	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	±9.6
10876	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.39	±9.6
10877	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	7.95	±9.6
10878	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.41	±9.6
10879	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.12	±9.6
10880	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.38	±9.6
10881	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	±9.6
10882	AAE	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.96	±9.6
10883	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.57	±9.6
10884	AAE	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.53	±9.6
10885	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	±9.6
10886	AAE	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	±9.6
10887	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	±9.6
10888	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.35	±9.6
10889	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.02	±9.6
10890	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.40	±9.6
10891	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.13	±9.6
10892	AAF	5G NR (CP-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.41	±9.6
10897	AAC	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.66	±9.6
10898	AAB	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	±9.6
10899	AAB	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	±9.6
10900	AAB	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10901	AAB	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10902	AAB	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10903	AAB	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10904	AAB	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10905	AAB	5G NR (DFT-s-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10906	AAB	5G NR (DFT-s-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10907	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.78	±9.6
10908	AAB	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	±9.6
10909	AAB	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.96	±9.6
10910	AAB	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 2
10911	AAB	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	±9.6
10912	AAB	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10913	AAB	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10914	AAB	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.85	±9.6
10915	AAB	5G NR (DFT-s-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	±9.6
10916	AAB	5G NR (DFT-s-OFDM, 50% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	±9.6
10917	AAB	5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	±9.6
10918	AAB	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	±9.6
10919	AAB	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	±9.6
10920	AAB	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	±9.6
10921	AAB	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10922	AAB	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.82	±9.6
10923	AAB	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10924	AAB	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10925	AAB	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.95	±9.6
10926	AAB	5G NR (DFT-s-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10927	AAB	5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	±9.6
10928	AAC	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6
10929	AAC	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6
10930	AAC	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6
10931	AAC	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10932	AAC	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10933	AAC	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10934	AAC	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10935	AAC	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10936	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.93	±9.6
10937	AAC	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.77	±9.6
10938	AAC	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	±9.6
10939	AAC	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.82	±9.6
10940	AAC	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.89	±9.6
10941	AAC	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	±9.6
10942	AAC	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	±9.6
10943	AAC	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.95	±9.6
10944	AAC	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.81	±9.6
10945	AAC	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	±9.6
10946	AAC	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	±9.6
10947	AAC	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	±9.6
10948	AAC	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	±9.6
10949	AAC	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	±9.6
10950	AAC	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	±9.6
10951	AAC	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.92	±9.6
10952	AAA	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.25	±9.6
10953	AAA	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.15	±9.6
10954	AAA	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.23	±9.6
10955	AAA	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.42	±9.6
10956	AAA	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.14	±9.6
10957	AAA	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.31	±9.6
10958	AAA	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.61	±9.6
10959	AAA	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	9.33	±9.6
10960	AAC	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.32	±9.6
10961	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.36	±9.6
10962	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.40	±9.6
10963	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.55	±9.6
10964	AAC	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.29	±9.6
10965	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.37	±9.6
10966	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.55	±9.6
10967	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.42	±9.6
10968	AAB	5G NR DL (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.49	±9.6
10972	AAB	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	11.59	±9.6
10973	AAB	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	9.06	±9.6
10974	AAB	5G NR (CP-OFDM, 100% RB, 100 MHz, 256-QAM, 30 kHz)	5G NR FR1 TDD	10.28	±9.6
10978	AAA	ULLA BDR	ULLA	1.16	±9.6
10979	AAA	ULLA HDR4	ULLA	8.58	±9.6
10980	AAA	ULLA HDR8	ULLA	10.32	±9.6
10981	AAA	ULLA HDRp4	ULLA	3.19	±9.6
10982	AAA	ULLA HDRp8	ULLA	3.43	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E $k = 2$
10983	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.31	+9.6
10984	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.42	+9.6
10985	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.54	+9.6
10986	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.50	+9.6
10987	AAA	5G NR DL (CP-OFDM, TM 3.1, 60 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.53	+9.6
10988	AAA	5G NR DL (CP-OFDM, TM 3.1, 70 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.38	+9.6
10989	AAA	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.33	+9.6
10990	AAA	5G NR DL (CP-OFDM, TM 3.1, 90 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.52	+9.6
11003	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	10.24	+9.6
11004	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	10.73	+9.6
11005	AAA	5G NR DL (CP-OFDM, TM 3.1, 25 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.70	+9.6
11006	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.55	+9.6
11007	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.46	+9.6
11008	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.51	+9.6
11009	AAA	5G NR DL (CP-OFDM, TM 3.1, 25 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.76	+9.6
11010	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.95	+9.6
11011	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.96	+9.6
11012	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.68	+9.6
11013	AAA	IEEE 802.11be (320 MHz, MCS1, 99pc duty cycle)	WLAN	8.47	+9.6
11014	AAA	IEEE 802.11be (320 MHz, MCS2, 99pc duty cycle)	WLAN	8.45	+9.6
11015	AAA	IEEE 802.11be (320 MHz, MCS3, 99pc duty cycle)	WLAN	8.44	+9.6
11016	AAA	IEEE 802.11be (320 MHz, MCS4, 99pc duty cycle)	WLAN	8.44	+9.6
11017	AAA	IEEE 802.11be (320 MHz, MCS5, 99pc duty cycle)	WLAN	8.41	+9.6
11018	AAA	IEEE 802.11be (320 MHz, MCS6, 99pc duty cycle)	WLAN	8.40	+9.6
11019	AAA	IEEE 802.11be (320 MHz, MCS7, 99pc duty cycle)	WLAN	8.29	+9.6
11020	AAA	IEEE 802.11be (320 MHz, MCS8, 99pc duty cycle)	WLAN	8.27	+9.6
11021	AAA	IEEE 802.11be (320 MHz, MCS9, 99pc duty cycle)	WLAN	8.46	+9.6
11022	AAA	IEEE 802.11be (320 MHz, MCS10, 99pc duty cycle)	WLAN	8.36	+9.6
11023	AAA	IEEE 802.11be (320 MHz, MCS11, 99pc duty cycle)	WLAN	8.09	+9.6
11024	AAA	IEEE 802.11be (320 MHz, MCS12, 99pc duty cycle)	WLAN	8.42	+9.6
11025	AAA	IEEE 802.11be (320 MHz, MCS13, 99pc duty cycle)	WLAN	8.37	+9.6
11026	AAA	IEEE 802.11be (320 MHz, MCS0, 99pc duty cycle)	WLAN	8.39	+9.6

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **B.V. ADT (Auden)**

Certificate No: **EX3-7472-Jun21**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:7472**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v6, QA CAL-23.v5, QA
CAL-25.v7
Calibration procedure for dosimetric E-field probes**

Calibration date: **June 3, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: CC2552 (20x)	09-Apr-21 (No. 217-03343)	Apr-22
DAE4	SN: 660	23-Dec-20 (No. DAE4-660_Dec20)	Dec-21
Reference Probe ES3DV2	SN: 3013	30-Dec-20 (No. ES3-3013_Dec20)	Dec-21
Secondary Standards	ID	Check Date (In house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (In house check Jun-20)	In house check: Jun-22
Power sensor E4412A	SN: MY41498087	06-Apr-16 (In house check Jun-20)	In house check: Jun-22
Power sensor E4412A	SN: 000110210	06-Apr-16 (In house check Jun-20)	In house check: Jun-22
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (In house check Jun-20)	In house check: Jun-22
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (In house check Oct-20)	In house check: Oct-21

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			Issued: June 3, 2021



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7472

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.59	0.49	0.42	$\pm 10.1 \%$
DCP (mV) ^B	97.4	93.2	98.8	

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Max dev.	Max Unc ^E (k=2)
0	CW	X	0.00	0.00	1.00	0.00	129.5	$\pm 3.5 \%$	$\pm 4.7 \%$
		Y	0.00	0.00	1.00		140.4		
		Z	0.00	0.00	1.00		145.6		
10352-AAA	Pulse Waveform (200Hz, 10%)	X	20.00	95.53	22.84	10.00	60.0	$\pm 3.2 \%$	$\pm 9.6 \%$
		Y	1.97	63.81	8.93		60.0		
		Z	2.84	67.27	10.89		60.0		
10353-AAA	Pulse Waveform (200Hz, 20%)	X	20.00	108.60	28.23	6.99	80.0	$\pm 2.6 \%$	$\pm 9.6 \%$
		Y	1.07	62.38	7.39		80.0		
		Z	1.88	67.33	10.01		80.0		
10354-AAA	Pulse Waveform (200Hz, 40%)	X	20.00	124.75	34.38	3.98	95.0	$\pm 1.8 \%$	$\pm 9.6 \%$
		Y	0.94	65.40	8.02		95.0		
		Z	12.51	84.49	14.30		95.0		
10355-AAA	Pulse Waveform (200Hz, 60%)	X	16.44	160.00	49.60	2.22	120.0	$\pm 1.6 \%$	$\pm 9.6 \%$
		Y	20.00	93.37	16.64		120.0		
		Z	20.00	94.85	17.27		120.0		
10387-AAA	QPSK Waveform, 1 MHz	X	2.17	70.84	18.12	1.00	150.0	$\pm 2.3 \%$	$\pm 9.6 \%$
		Y	1.93	69.99	17.06		150.0		
		Z	1.53	65.87	14.49		150.0		
10388-AAA	QPSK Waveform, 10 MHz	X	2.99	73.22	18.82	0.00	150.0	$\pm 1.9 \%$	$\pm 9.6 \%$
		Y	2.41	69.95	17.21		150.0		
		Z	2.02	66.67	15.14		150.0		
10396-AAA	64-QAM Waveform, 100 kHz	X	3.13	72.69	20.91	3.01	150.0	$\pm 1.6 \%$	$\pm 9.6 \%$
		Y	2.79	71.84	20.31		150.0		
		Z	2.28	67.78	17.71		150.0		
10399-AAA	64-QAM Waveform, 40 MHz	X	3.81	68.61	17.01	0.00	150.0	$\pm 1.8 \%$	$\pm 9.6 \%$
		Y	3.61	67.79	16.45		150.0		
		Z	3.40	66.61	15.52		150.0		
10414-AAA	WLAN CCDF, 64-QAM, 40MHz	X	5.02	66.09	16.14	0.00	150.0	$\pm 2.0 \%$	$\pm 9.6 \%$
		Y	4.86	66.03	15.98		150.0		
		Z	4.72	65.52	15.45		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSI (see Pages 5 and 6)

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7472

Sensor Model Parameters

	C1 fF	C2 fF	α V^{-1}	T1 $ms.V^{-2}$	T2 $ms.V^{-1}$	T3 ms	T4 V^{-2}	T5 V^{-1}	T6
X	48.5	369.64	37.24	9.47	0.00	5.09	0.39	0.33	1.01
Y	35.9	271.40	36.52	5.08	0.00	4.95	1.66	0.00	1.01
Z	34.5	256.44	35.29	3.01	0.00	4.98	1.38	0.00	1.01

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-96
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an *Area Scan* job.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7472

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
6	55.0	0.75	19.58	19.58	19.58	0.00	1.00	± 13.3 %
13	55.0	0.75	17.64	17.64	17.64	0.00	1.00	± 13.3 %
450	43.5	0.87	11.47	11.47	11.47	0.16	1.30	± 13.3 %
750	41.9	0.89	10.32	10.32	10.32	0.36	1.00	± 12.0 %
835	41.5	0.90	10.05	10.05	10.05	0.36	0.97	± 12.0 %
900	41.5	0.97	9.91	9.91	9.91	0.50	0.80	± 12.0 %
1450	40.5	1.20	9.00	9.00	9.00	0.36	0.80	± 12.0 %
1640	40.2	1.31	8.85	8.85	8.85	0.37	0.80	± 12.0 %
1750	40.1	1.37	8.77	8.77	8.77	0.36	0.80	± 12.0 %
1900	40.0	1.40	8.43	8.43	8.43	0.31	0.80	± 12.0 %
2000	40.0	1.40	8.31	8.31	8.31	0.27	0.80	± 12.0 %
2300	39.5	1.67	8.13	8.13	8.13	0.33	0.80	± 12.0 %
2450	39.2	1.80	7.89	7.89	7.89	0.35	0.80	± 12.0 %
2600	39.0	1.96	7.58	7.58	7.58	0.24	1.14	± 12.0 %
3300	38.2	2.71	7.27	7.27	7.27	0.35	1.35	± 13.1 %
3500	37.9	2.91	7.17	7.17	7.17	0.35	1.35	± 13.1 %
3700	37.7	3.12	7.12	7.12	7.12	0.40	1.35	± 13.1 %
3900	37.5	3.32	6.90	6.90	6.90	0.40	1.60	± 13.1 %
4100	37.2	3.53	6.60	6.60	6.60	0.40	1.60	± 13.1 %
4200	37.1	3.63	6.53	6.53	6.53	0.40	1.60	± 13.1 %
4400	36.9	3.84	6.40	6.40	6.40	0.40	1.70	± 13.1 %
4600	36.7	4.04	6.35	6.35	6.35	0.40	1.70	± 13.1 %
4800	36.4	4.25	6.30	6.30	6.30	0.40	1.80	± 13.1 %
4950	36.3	4.40	6.00	6.00	6.00	0.40	1.80	± 13.1 %
5250	35.9	4.71	5.78	5.78	5.78	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.95	4.95	4.95	0.40	1.80	± 13.1 %
5750	35.4	5.22	5.25	5.25	5.25	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7472

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^g (mm)	Unc (k=2)
6500	34.5	6.07	5.65	5.65	5.65	0.25	2.50	± 18.6 %


^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

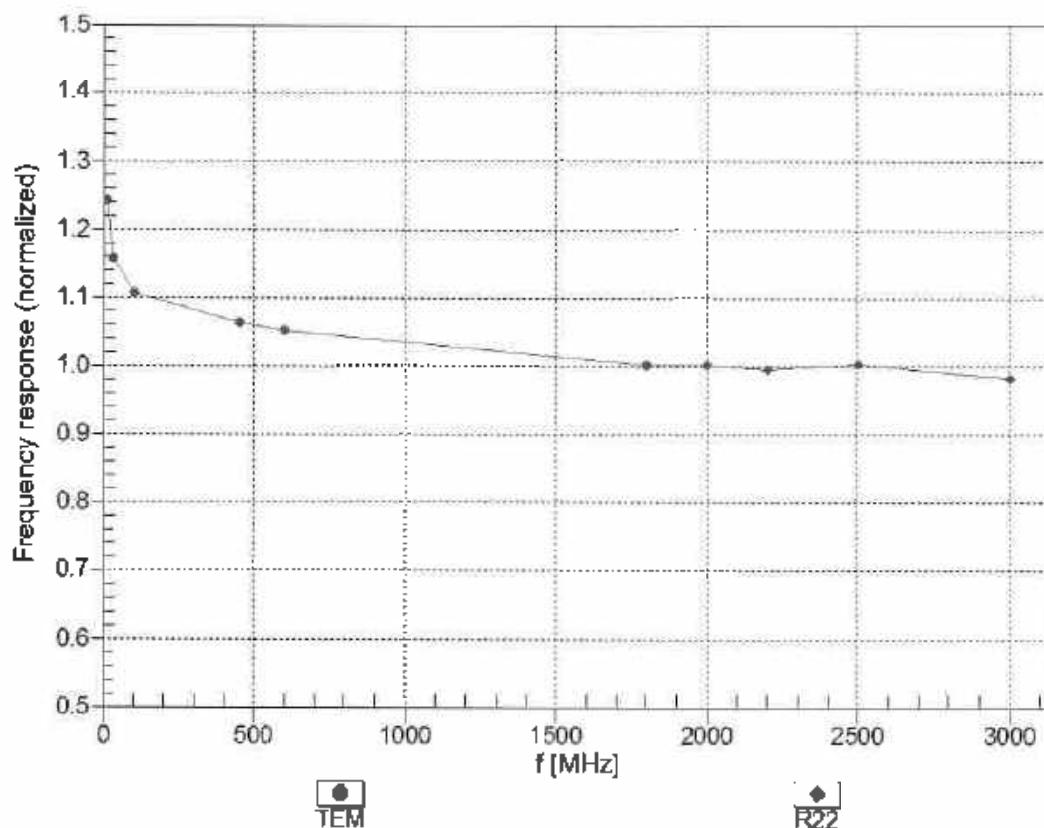



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM


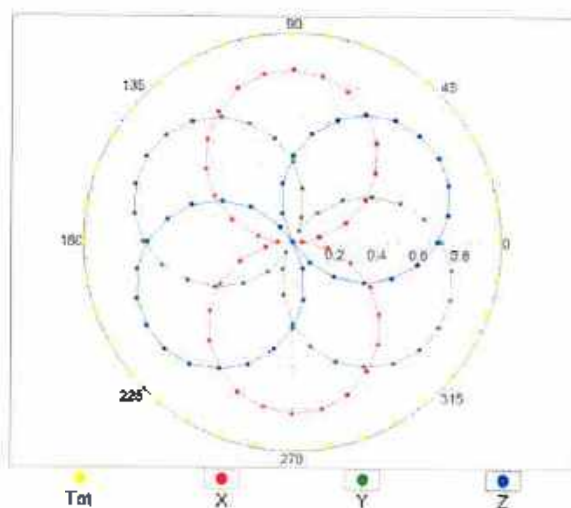


f=1800 MHz,R22

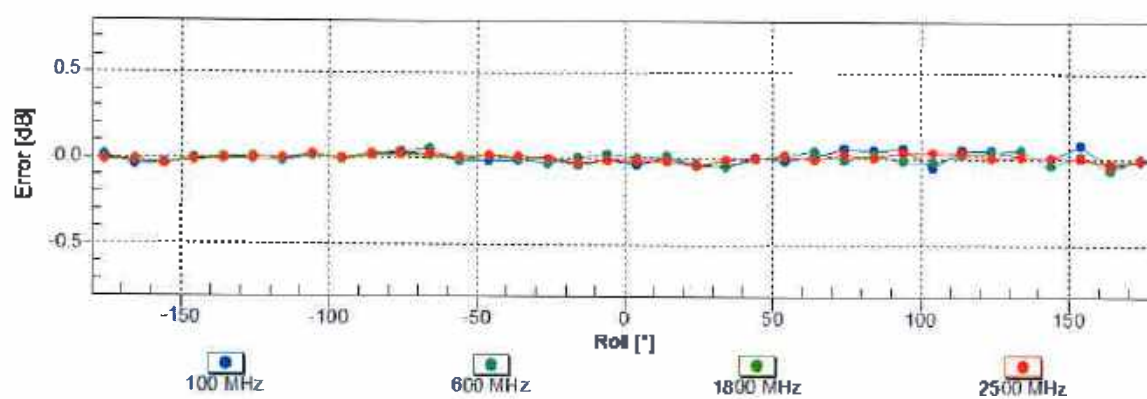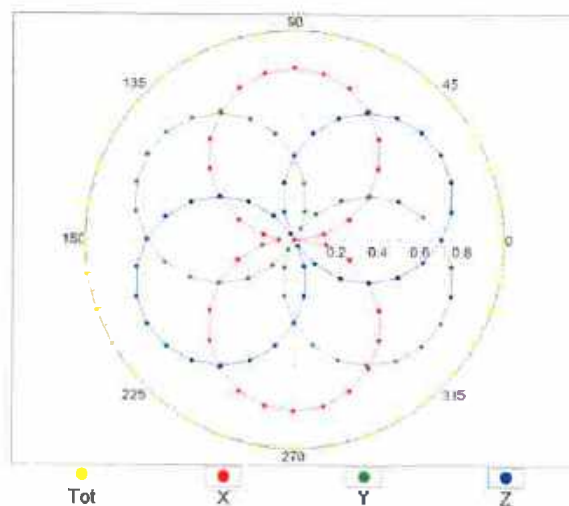


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$)

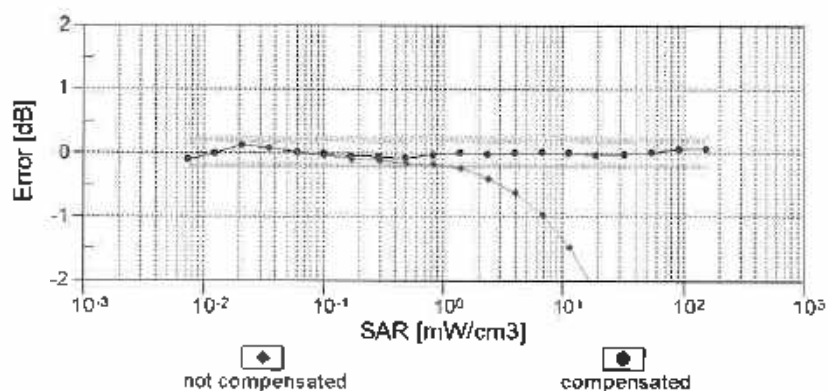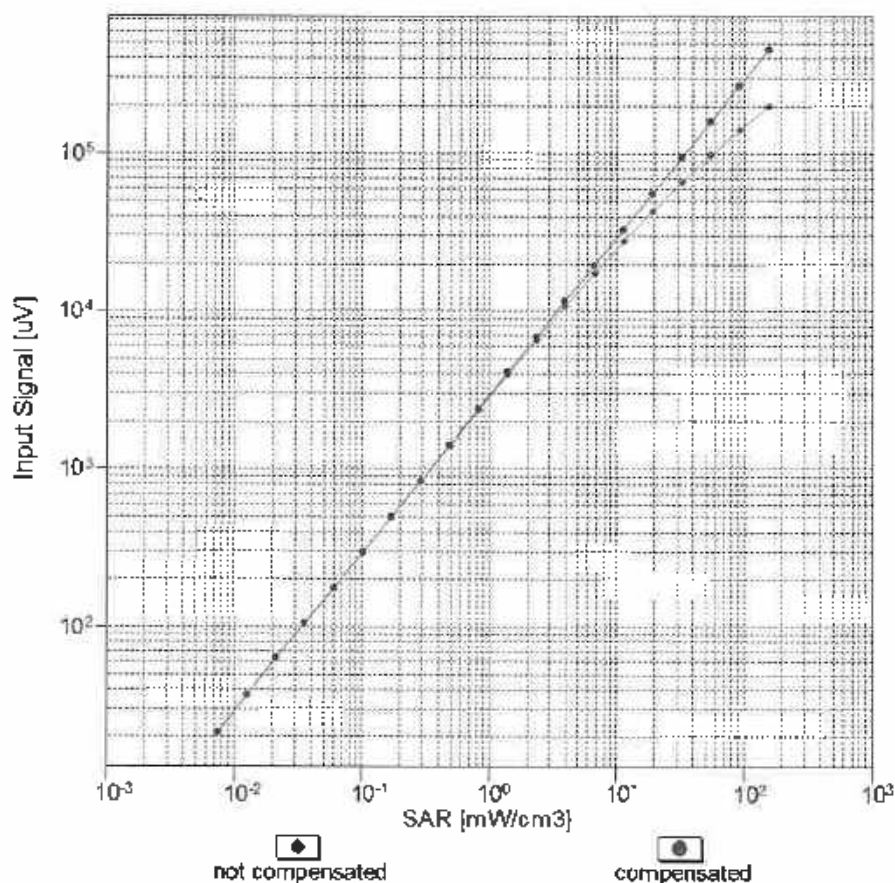



Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

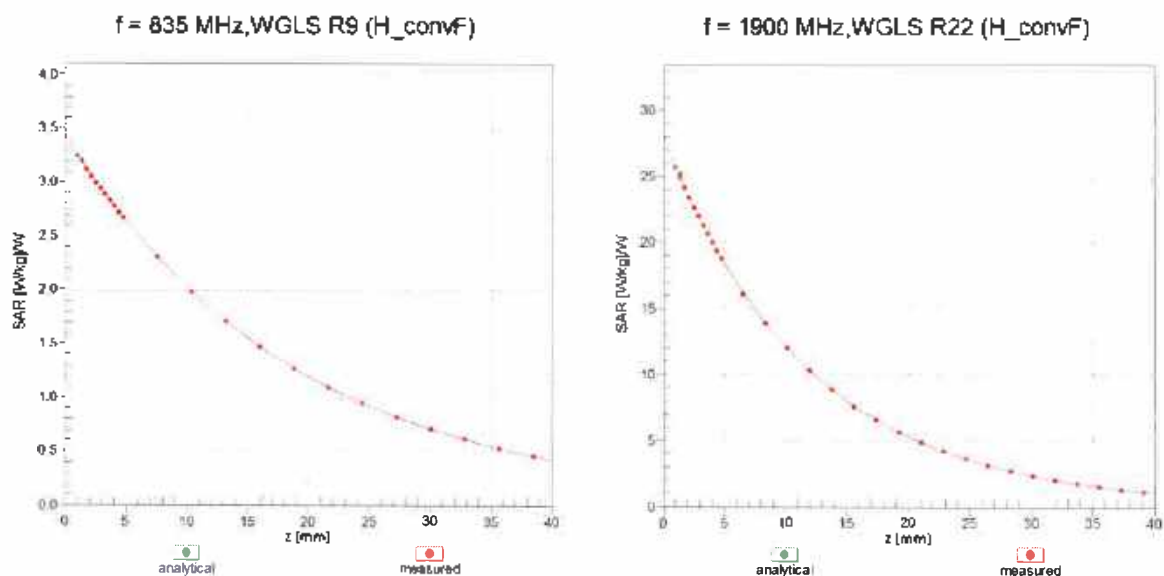

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

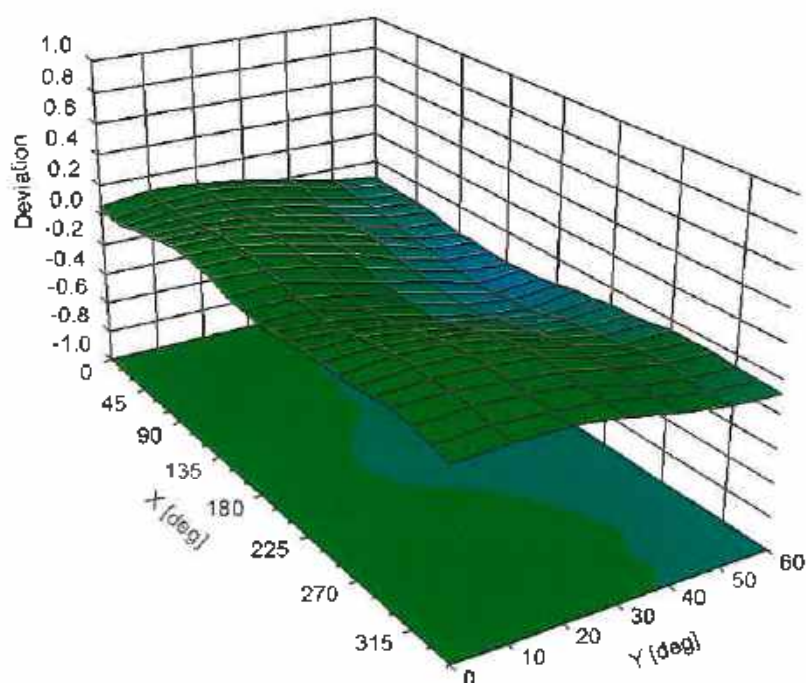

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

Appendix: Modulation Calibration Parameters

UID	Rev	Communication System Name	Group	PAR (dB)	Unc [†] (k=2)
0		CW	CW	0.00	± 4.7 %
10010	CAA	SAR Validation (Square, 100ms, 10ms)	Test	10.00	± 9.6 %
10011	CAB	UMTS-FDD (WCDMA)	WCDMA	2.91	± 9.6 %
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	± 9.6 %
10013	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.46	± 9.6 %
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	± 9.6 %
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	± 9.6 %
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	± 9.6 %
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	± 9.6 %
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	± 9.6 %
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	± 9.6 %
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	± 9.6 %
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	± 9.6 %
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	± 9.6 %
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	± 9.6 %
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	± 9.6 %
10033	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	Bluetooth	7.74	± 9.6 %
10034	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	Bluetooth	4.53	± 9.6 %
10035	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	Bluetooth	3.83	± 9.6 %
10036	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	± 9.6 %
10037	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	± 9.6 %
10038	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	Bluetooth	4.10	± 9.6 %
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	± 9.6 %
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	AMPS	7.78	± 9.6 %
10044	CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	AMPS	0.00	± 9.6 %
10048	CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13.80	± 9.6 %
10049	CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	± 9.6 %
10056	CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	TD-SCDMA	11.01	± 9.6 %
10058	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	± 9.6 %
10059	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	± 9.6 %
10060	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	± 9.6 %
10061	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	± 9.6 %
10062	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	WLAN	8.68	± 9.6 %
10063	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	WLAN	8.63	± 9.6 %
10064	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	WLAN	9.09	± 9.6 %
10065	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	± 9.6 %
10066	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	WLAN	9.38	± 9.6 %
10067	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	± 9.6 %
10068	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	WLAN	10.24	± 9.6 %
10069	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	± 9.6 %
10071	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	± 9.6 %
10072	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	± 9.6 %
10073	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	± 9.6 %
10074	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	± 9.6 %
10075	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.77	± 9.6 %
10076	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	± 9.6 %
10077	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	± 9.6 %
10081	CAB	CDMA2000 (1xRTT, RC3)	CDMA2000	3.97	± 9.6 %
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	AMPS	4.77	± 9.6 %
10090	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	± 9.6 %
10097	CAC	UMTS-FDD (HSDPA)	WCDMA	3.98	± 9.6 %
10098	DAC	UMTS-FDD (HSUPA, Subtest 2)	WCDMA	3.98	± 9.6 %

10099	CAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	GSM	9.55	± 9.6 %
10100	CAC	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	5.67	± 9.6 %
10101	CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	± 9.6 %
10102	CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10103	DAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	9.29	± 9.6 %
10104	CAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-TDD	9.97	± 9.6 %
10105	CAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	10.01	± 9.6 %
10108	CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FDD	5.80	± 9.6 %
10109	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10110	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-FDD	5.75	± 9.6 %
10111	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-FDD	6.44	± 9.6 %
10112	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FDD	6.59	± 9.6 %
10113	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-FDD	6.62	± 9.6 %
10114	CAG	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	± 9.6 %
10115	CAG	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	± 9.6 %
10116	CAG	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	WLAN	8.15	± 9.6 %
10117	CAG	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	± 9.6 %
10118	CAD	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	WLAN	8.59	± 9.6 %
10119	CAD	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	WLAN	8.13	± 9.6 %
10140	CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-FDD	6.49	± 9.6 %
10141	CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	6.53	± 9.6 %
10142	CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10143	CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDD	6.35	± 9.6 %
10144	CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-FDD	6.65	± 9.6 %
10145	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.76	± 9.6 %
10146	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	± 9.6 %
10147	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.72	± 9.6 %
10149	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	± 9.6 %
10150	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10151	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	9.28	± 9.6 %
10152	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	± 9.6 %
10153	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TDD	10.05	± 9.6 %
10154	CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5.75	± 9.6 %
10155	CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10156	CAF	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FDD	5.79	± 9.6 %
10157	CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FDD	6.49	± 9.6 %
10158	CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	± 9.6 %
10159	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-FDD	6.56	± 9.6 %
10160	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDD	5.82	± 9.6 %
10161	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10162	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-FDD	6.58	± 9.6 %
10166	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	5.46	± 9.6 %
10167	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.21	± 9.6 %
10168	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.79	± 9.6 %
10169	CAG	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10170	CAG	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10171	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	± 9.6 %
10172	CAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10173	CAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10174	CAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10175	CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10176	CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10177	CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10178	CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10179	AAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10180	CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %

10181	CAG	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10182	CAG	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10183	CAG	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10184	CAG	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10185	CAI	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	6.51	± 9.6 %
10186	CAG	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10187	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10188	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10189	CAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10193	CAE	IEEE 802.11n (HT Greenfield, 8.5 Mbps, BPSK)	WLAN	8.09	± 9.6 %
10194	AAD	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	± 9.6 %
10195	CAE	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	WLAN	8.21	± 9.6 %
10196	CAE	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	WLAN	8.10	± 9.6 %
10197	AAE	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	WLAN	8.13	± 9.6 %
10198	CAF	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	WLAN	8.27	± 9.6 %
10219	CAF	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	WLAN	8.03	± 9.6 %
10220	AAF	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	WLAN	8.13	± 9.6 %
10221	CAC	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	WLAN	8.27	± 9.6 %
10222	CAC	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	WLAN	8.08	± 9.6 %
10223	CAD	IEEE 802.11n (HT Mixed, 80 Mbps, 16-QAM)	WLAN	8.48	± 9.6 %
10224	CAD	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	WLAN	8.08	± 9.6 %
10225	CAD	UMTS-FDD (HSPA+)	WCDMA	5.97	± 9.6 %
10226	CAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.49	± 9.6 %
10227	CAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.26	± 9.6 %
10228	CAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.22	± 9.6 %
10229	DAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10230	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10231	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.19	± 9.6 %
10232	CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10233	CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10234	CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10235	CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10236	CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10237	CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10238	CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10239	CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10240	CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10241	CAB	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.82	± 9.6 %
10242	CAD	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-TDD	9.86	± 9.6 %
10243	CAD	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.46	± 9.6 %
10244	CAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-TDD	10.06	± 9.6 %
10245	CAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.06	± 9.6 %
10246	CAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	9.30	± 9.6 %
10247	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-TDD	9.91	± 9.6 %
10248	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-TDD	10.09	± 9.6 %
10249	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-TDD	9.29	± 9.6 %
10250	CAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.81	± 9.6 %
10251	CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-TDD	10.17	± 9.6 %
10252	CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TDD	9.24	± 9.6 %
10253	CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9.90	± 9.6 %
10254	CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-TDD	10.14	± 9.6 %
10255	CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-TDD	9.20	± 9.6 %
10256	CAB	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.96	± 9.6 %
10257	CAD	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.08	± 9.6 %
10258	CAD	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.34	± 9.6 %
10259	CAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TDD	9.98	± 9.6 %

10260	CAG	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-TDD	9.97	± 9.6 %
10261	CAG	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TDD	9.24	± 9.6 %
10262	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-TDD	9.83	± 9.6 %
10263	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-TDD	10.16	± 9.6 %
10264	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	9.23	± 9.6 %
10265	CAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TDD	9.92	± 9.6 %
10266	CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TDD	10.07	± 9.6 %
10267	CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TDD	9.30	± 9.6 %
10268	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.06	± 9.6 %
10269	CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.13	± 9.6 %
10270	CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	± 9.6 %
10274	CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	WCDMA	4.87	± 9.6 %
10275	CAD	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	WCDMA	3.96	± 9.6 %
10277	CAD	PHS (QPSK)	PHS	11.81	± 9.6 %
10278	CAD	PHS (QPSK, BW 884MHz, Rolloff 0.5)	PHS	11.81	± 9.6 %
10279	CAG	PHS (QPSK, BW 884MHz, Rolloff 0.38)	PHS	12.18	± 9.6 %
10290	CAG	CDMA2000, RC1, SO55, Full Rate	CDMA2000	3.91	± 9.6 %
10291	CAG	CDMA2000, RC3, SO55, Full Rate	CDMA2000	3.46	± 9.6 %
10292	CAG	CDMA2000, RC3, SO32, Full Rate	CDMA2000	3.39	± 9.6 %
10293	CAG	CDMA2000, RC3, SO3, Full Rate	CDMA2000	3.50	± 9.6 %
10295	CAG	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	CDMA2000	12.49	± 9.6 %
10297	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	5.81	± 9.6 %
10298	CAF	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10299	CAF	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-FDD	6.39	± 9.6 %
10300	CAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10301	CAC	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	WiMAX	12.03	± 9.6 %
10302	CAB	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3CTRL)	WiMAX	12.57	± 9.6 %
10303	CAB	IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	WiMAX	12.52	± 9.6 %
10304	CAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	WiMAX	11.86	± 9.6 %
10305	CAA	IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC)	WiMAX	15.24	± 9.6 %
10306	CAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC)	WiMAX	14.67	± 9.6 %
10307	AAB	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC)	WiMAX	14.49	± 9.6 %
10308	AAB	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	WiMAX	14.46	± 9.6 %
10309	AAB	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3)	WiMAX	14.58	± 9.6 %
10310	AAB	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3)	WiMAX	14.57	± 9.6 %
10311	AAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-FDD	6.06	± 9.6 %
10313	AAD	iDEN 1:3	iDEN	10.51	± 9.6 %
10314	AAD	iDEN 1:6	iDEN	13.48	± 9.6 %
10315	AAD	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc dc)	WLAN	1.71	± 9.6 %
10316	AAD	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc dc)	WLAN	8.36	± 9.6 %
10317	AAA	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc dc)	WLAN	8.36	± 9.6 %
10352	AAA	Pulse Waveform (200Hz, 10%)	Generic	10.00	± 9.6 %
10353	AAA	Pulse Waveform (200Hz, 20%)	Generic	6.99	± 9.6 %
10354	AAA	Pulse Waveform (200Hz, 40%)	Generic	3.98	± 9.6 %
10355	AAA	Pulse Waveform (200Hz, 60%)	Generic	2.22	± 9.6 %
10356	AAA	Pulse Waveform (200Hz, 80%)	Generic	0.97	± 9.6 %
10387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	± 9.6 %
10388	AAA	QPSK Waveform, 10 MHz	Generic	5.22	± 9.6 %
10396	AAA	64-QAM Waveform, 100 kHz	Generic	6.27	± 9.6 %
10399	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	± 9.6 %
10400	AAD	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc dc)	WLAN	8.37	± 9.6 %
10401	AAA	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc dc)	WLAN	8.60	± 9.6 %
10402	AAA	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc dc)	WLAN	8.53	± 9.6 %
10403	AAB	CDMA2000 (1xEV-DO, Rev. 0)	CDMA2000	3.76	± 9.6 %
10404	AAB	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	± 9.6 %
10406	AAD	CDMA2000, RC3, SO32, SCH0, Full Rate	CDMA2000	5.22	± 9.6 %

10410	AAA	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub=2,3,4,7,8,9)	LTE-TDD	7.82	± 9.6 %
10414	AAA	WLAN CCDF, 64-QAM, 40MHz	Generic	8.54	± 9.6 %
10415	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc dc)	WLAN	1.54	± 9.6 %
10416	AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc dc)	WLAN	8.23	± 9.6 %
10417	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc dc)	WLAN	8.23	± 9.6 %
10418	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc, Long)	WLAN	8.14	± 9.6 %
10419	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc, Short)	WLAN	8.19	± 9.6 %
10422	AAA	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	WLAN	8.32	± 9.6 %
10423	AAA	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	WLAN	8.47	± 9.6 %
10424	AAE	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	± 9.6 %
10425	AAE	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	8.41	± 9.6 %
10426	AAE	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	WLAN	8.45	± 9.6 %
10427	AAB	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8.41	± 9.6 %
10430	AAB	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	LTE-FDD	8.28	± 9.6 %
10431	AAC	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	LTE-FDD	8.38	± 9.6 %
10432	AAB	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	LTE-FDD	8.34	± 9.6 %
10433	AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	8.34	± 9.6 %
10434	AAG	W-CDMA (BS Test Model 1, 64 DPCH)	WCDMA	8.60	± 9.6 %
10435	AAA	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10447	AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.56	± 9.6 %
10448	AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.53	± 9.6 %
10449	AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.51	± 9.6 %
10450	AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.48	± 9.6 %
10451	AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	WCDMA	7.59	± 9.6 %
10453	AAC	Validation (Square, 10ms, 1ms)	Test	10.00	± 9.6 %
10456	AAC	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc dc)	WLAN	8.63	± 9.6 %
10457	AAC	UMTS-FDD (DC-HSDPA)	WCDMA	6.62	± 9.6 %
10458	AAC	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.55	± 9.6 %
10459	AAC	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	8.25	± 9.6 %
10460	AAC	UMTS-FDD (WCDMA, AMR)	WCDMA	2.39	± 9.6 %
10461	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10462	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.30	± 9.6 %
10463	AAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.56	± 9.6 %
10464	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10465	AAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6 %
10466	AAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 9.6 %
10467	AAA	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10468	AAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6 %
10469	AAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.56	± 9.6 %
10470	AAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10471	AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6 %
10472	AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 9.6 %
10473	AAA	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10474	AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6 %
10475	AAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 9.6 %
10477	AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6 %
10478	AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 9.6 %
10479	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6 %
10480	AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.18	± 9.6 %
10481	AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.45	± 9.6 %
10482	AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.71	± 9.6 %
10483	AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, Sub)	LTE-TDD	8.39	± 9.6 %
10484	AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.47	± 9.6 %
10485	AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.59	± 9.6 %
10486	AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.38	± 9.6 %
10487	AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.60	± 9.6 %

10488	AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.70	± 9.6 %
10489	AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.31	± 9.6 %
10490	AAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	± 9.6 %
10491	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6 %
10492	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.41	± 9.6 %
10493	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.55	± 9.6 %
10494	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6 %
10495	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.37	± 9.6 %
10496	AAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	± 9.6 %
10497	AAE	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.67	± 9.6 %
10498	AAE	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.40	± 9.6 %
10499	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.68	± 9.6 %
10500	AAF	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.67	± 9.6 %
10501	AAF	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Sub)	LTE-TDD	8.44	± 9.6 %
10502	AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.52	± 9.6 %
10503	AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.72	± 9.6 %
10504	AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.31	± 9.6 %
10505	AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	± 9.6 %
10506	AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6 %
10507	AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.36	± 9.6 %
10508	AAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.55	± 9.6 %
10509	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.99	± 9.6 %
10510	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.49	± 9.6 %
10511	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.51	± 9.6 %
10512	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6 %
10513	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.42	± 9.6 %
10514	AAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.45	± 9.6 %
10515	AAE	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc dc)	WLAN	1.58	± 9.6 %
10516	AAE	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc dc)	WLAN	1.57	± 9.6 %
10517	AAF	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc dc)	WLAN	1.58	± 9.6 %
10518	AAF	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc dc)	WLAN	8.23	± 9.6 %
10519	AAF	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc dc)	WLAN	8.39	± 9.6 %
10520	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc dc)	WLAN	8.12	± 9.6 %
10521	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc dc)	WLAN	7.97	± 9.6 %
10522	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc dc)	WLAN	8.45	± 9.6 %
10523	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc dc)	WLAN	8.08	± 9.6 %
10524	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc dc)	WLAN	8.27	± 9.6 %
10525	AAC	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc dc)	WLAN	8.36	± 9.6 %
10526	AAF	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc dc)	WLAN	8.42	± 9.6 %
10527	AAF	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc dc)	WLAN	8.21	± 9.6 %
10528	AAF	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc dc)	WLAN	8.36	± 9.6 %
10529	AAF	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc dc)	WLAN	8.36	± 9.6 %
10531	AAF	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc dc)	WLAN	8.43	± 9.6 %
10532	AAF	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc dc)	WLAN	8.29	± 9.6 %
10533	AAE	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc dc)	WLAN	8.38	± 9.6 %
10534	AAE	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc dc)	WLAN	8.45	± 9.6 %
10535	AAE	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc dc)	WLAN	8.45	± 9.6 %
10536	AAF	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc dc)	WLAN	8.32	± 9.6 %
10537	AAF	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc dc)	WLAN	8.44	± 9.6 %
10538	AAF	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc dc)	WLAN	8.54	± 9.6 %
10540	AAA	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc dc)	WLAN	8.39	± 9.6 %
10541	AAA	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc dc)	WLAN	8.46	± 9.6 %
10542	AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc dc)	WLAN	8.65	± 9.6 %
10543	AAC	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc dc)	WLAN	8.65	± 9.6 %
10544	AAC	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc dc)	WLAN	8.47	± 9.6 %
10545	AAC	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc dc)	WLAN	8.55	± 9.6 %

10546	AAC	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc dc)	WLAN	8.35	± 9.6 %
10547	AAC	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc dc)	WLAN	8.49	± 9.6 %
10548	AAC	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc dc)	WLAN	8.37	± 9.6 %
10550	AAC	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc dc)	WLAN	8.38	± 9.6 %
10551	AAC	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc dc)	WLAN	8.50	± 9.6 %
10552	AAC	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc dc)	WLAN	8.42	± 9.6 %
10553	AAC	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc dc)	WLAN	8.45	± 9.6 %
10554	AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 99pc dc)	WLAN	8.48	± 9.6 %
10555	AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 99pc dc)	WLAN	8.47	± 9.6 %
10556	AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 99pc dc)	WLAN	8.50	± 9.6 %
10557	AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 99pc dc)	WLAN	8.52	± 9.6 %
10558	AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 99pc dc)	WLAN	8.61	± 9.6 %
10560	AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 99pc dc)	WLAN	8.73	± 9.6 %
10561	AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 99pc dc)	WLAN	8.56	± 9.6 %
10562	AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 99pc dc)	WLAN	8.69	± 9.6 %
10563	AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 99pc dc)	WLAN	8.77	± 9.6 %
10564	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc dc)	WLAN	8.25	± 9.6 %
10565	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc dc)	WLAN	8.45	± 9.6 %
10566	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc dc)	WLAN	8.13	± 9.6 %
10567	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc dc)	WLAN	8.00	± 9.6 %
10568	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc dc)	WLAN	8.37	± 9.6 %
10569	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc dc)	WLAN	8.10	± 9.6 %
10570	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc dc)	WLAN	8.30	± 9.6 %
10571	AAC	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc dc)	WLAN	1.99	± 9.6 %
10572	AAC	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc dc)	WLAN	1.99	± 9.6 %
10573	AAC	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc dc)	WLAN	1.98	± 9.6 %
10574	AAC	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc dc)	WLAN	1.98	± 9.6 %
10575	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc dc)	WLAN	8.59	± 9.6 %
10576	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc dc)	WLAN	8.60	± 9.6 %
10577	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc dc)	WLAN	8.70	± 9.6 %
10578	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc dc)	WLAN	8.49	± 9.6 %
10579	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc dc)	WLAN	8.36	± 9.6 %
10580	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc dc)	WLAN	8.76	± 9.6 %
10581	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc dc)	WLAN	8.35	± 9.6 %
10582	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc dc)	WLAN	8.67	± 9.6 %
10583	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 8 Mbps, 90pc dc)	WLAN	8.59	± 9.6 %
10584	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc dc)	WLAN	8.60	± 9.6 %
10585	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc dc)	WLAN	8.70	± 9.6 %
10586	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc dc)	WLAN	8.49	± 9.6 %
10587	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc dc)	WLAN	8.36	± 9.6 %
10588	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc dc)	WLAN	8.76	± 9.6 %
10589	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc dc)	WLAN	8.35	± 9.6 %
10590	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc dc)	WLAN	8.67	± 9.6 %
10591	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc dc)	WLAN	8.63	± 9.6 %
10592	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc dc)	WLAN	8.79	± 9.6 %
10593	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc dc)	WLAN	8.64	± 9.6 %
10594	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc dc)	WLAN	8.74	± 9.6 %
10595	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc dc)	WLAN	8.74	± 9.6 %
10596	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc dc)	WLAN	8.71	± 9.6 %
10597	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc dc)	WLAN	8.72	± 9.6 %
10598	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc dc)	WLAN	8.50	± 9.6 %
10599	AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc dc)	WLAN	8.79	± 9.6 %
10600	AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc dc)	WLAN	8.88	± 9.6 %
10601	AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc dc)	WLAN	8.82	± 9.6 %
10602	AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc dc)	WLAN	8.94	± 9.6 %
10603	AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc dc)	WLAN	9.03	± 9.6 %

10604	AAC	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc dc)	WLAN	8.76	± 9.6 %
10605	AAC	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc dc)	WLAN	8.97	± 9.6 %
10606	AAC	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc dc)	WLAN	8.82	± 9.6 %
10607	AAC	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc dc)	WLAN	8.64	± 9.6 %
10608	AAC	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc dc)	WLAN	8.77	± 9.6 %
10609	AAC	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc dc)	WLAN	8.57	± 9.6 %
10610	AAC	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc dc)	WLAN	8.78	± 9.6 %
10611	AAC	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc dc)	WLAN	8.70	± 9.6 %
10612	AAC	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc dc)	WLAN	8.77	± 9.6 %
10613	AAC	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc dc)	WLAN	8.94	± 9.6 %
10614	AAC	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc dc)	WLAN	8.59	± 9.6 %
10615	AAC	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc dc)	WLAN	8.82	± 9.6 %
10616	AAC	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc dc)	WLAN	8.82	± 9.6 %
10617	AAC	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc dc)	WLAN	8.81	± 9.6 %
10618	AAC	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc dc)	WLAN	8.58	± 9.6 %
10619	AAC	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc dc)	WLAN	8.86	± 9.6 %
10620	AAC	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc dc)	WLAN	8.87	± 9.6 %
10621	AAC	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc dc)	WLAN	8.77	± 9.6 %
10622	AAC	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc dc)	WLAN	8.68	± 9.6 %
10623	AAC	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc dc)	WLAN	8.82	± 9.6 %
10624	AAC	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc dc)	WLAN	8.96	± 9.6 %
10625	AAC	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc dc)	WLAN	8.96	± 9.6 %
10626	AAC	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc dc)	WLAN	8.83	± 9.6 %
10627	AAC	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc dc)	WLAN	8.88	± 9.6 %
10628	AAC	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc dc)	WLAN	8.71	± 9.6 %
10629	AAC	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc dc)	WLAN	8.85	± 9.6 %
10630	AAC	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc dc)	WLAN	8.72	± 9.6 %
10631	AAC	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc dc)	WLAN	8.81	± 9.6 %
10632	AAC	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc dc)	WLAN	8.74	± 9.6 %
10633	AAC	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc dc)	WLAN	8.83	± 9.6 %
10634	AAC	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc dc)	WLAN	8.80	± 9.6 %
10635	AAC	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc dc)	WLAN	8.81	± 9.6 %
10636	AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 90pc dc)	WLAN	8.83	± 9.6 %
10637	AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 90pc dc)	WLAN	8.79	± 9.6 %
10638	AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 90pc dc)	WLAN	8.86	± 9.6 %
10639	AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 90pc dc)	WLAN	8.85	± 9.6 %
10640	AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 90pc dc)	WLAN	8.98	± 9.6 %
10641	AAC	IEEE 802.11ac WiFi (160MHz, MCS5, 90pc dc)	WLAN	9.06	± 9.6 %
10642	AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 90pc dc)	WLAN	9.06	± 9.6 %
10643	AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 90pc dc)	WLAN	8.89	± 9.6 %
10644	AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 90pc dc)	WLAN	9.05	± 9.6 %
10645	AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 90pc dc)	WLAN	9.11	± 9.6 %
10646	AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Sub=2,7)	LTE-TDD	11.96	± 9.6 %
10647	AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Sub=2,7)	LTE-TDD	11.96	± 9.6 %
10648	AAC	CDMA2000 (1x Advanced)	CDMA2000	3.45	± 9.6 %
10652	AAC	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.91	± 9.6 %
10653	AAC	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.42	± 9.6 %
10654	AAC	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.96	± 9.6 %
10655	AAC	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.21	± 9.6 %
10658	AAC	Pulse Waveform (200Hz, 10%)	Test	10.00	± 9.6 %
10659	AAC	Pulse Waveform (200Hz, 20%)	Test	6.99	± 9.6 %
10660	AAC	Pulse Waveform (200Hz, 40%)	Test	3.98	± 9.6 %
10661	AAC	Pulse Waveform (200Hz, 60%)	Test	2.22	± 9.6 %
10662	AAC	Pulse Waveform (200Hz, 80%)	Test	0.97	± 9.6 %
10670	AAC	Bluetooth Low Energy	Bluetooth	2.19	± 9.6 %
10671	AAC	IEEE 802.11ax (20MHz, MCS0, 90pc dc)	WLAN	9.09	± 9.6 %

10672	AAD	IEEE 802.11ax (20MHz, MCS1, 90pc dc)	WLAN	8.57	± 9.6 %
10673	AAD	IEEE 802.11ax (20MHz, MCS2, 90pc dc)	WLAN	8.78	± 9.6 %
10674	AAD	IEEE 802.11ax (20MHz, MCS3, 90pc dc)	WLAN	8.74	± 9.6 %
10675	AAD	IEEE 802.11ax (20MHz, MCS4, 90pc dc)	WLAN	8.90	± 9.6 %
10676	AAD	IEEE 802.11ax (20MHz, MCS5, 90pc dc)	WLAN	8.77	± 9.6 %
10677	AAD	IEEE 802.11ax (20MHz, MCS6, 90pc dc)	WLAN	8.73	± 9.6 %
10678	AAD	IEEE 802.11ax (20MHz, MCS7, 90pc dc)	WLAN	8.78	± 9.6 %
10679	AAD	IEEE 802.11ax (20MHz, MCS8, 90pc dc)	WLAN	8.89	± 9.6 %
10680	AAD	IEEE 802.11ax (20MHz, MCS9, 90pc dc)	WLAN	8.80	± 9.6 %
10681	AAG	IEEE 802.11ax (20MHz, MCS10, 90pc dc)	WLAN	8.62	± 9.6 %
10682	AAF	IEEE 802.11ax (20MHz, MCS11, 90pc dc)	WLAN	8.83	± 9.6 %
10683	AAA	IEEE 802.11ax (20MHz, MCS0, 99pc dc)	WLAN	8.42	± 9.6 %
10684	AAC	IEEE 802.11ax (20MHz, MCS1, 99pc dc)	WLAN	8.26	± 9.6 %
10685	AAC	IEEE 802.11ax (20MHz, MCS2, 99pc dc)	WLAN	8.33	± 9.6 %
10686	AAC	IEEE 802.11ax (20MHz, MCS3, 99pc dc)	WLAN	8.28	± 9.6 %
10687	AAE	IEEE 802.11ax (20MHz, MCS4, 99pc dc)	WLAN	8.45	± 9.6 %
10688	AAE	IEEE 802.11ax (20MHz, MCS5, 99pc dc)	WLAN	8.29	± 9.6 %
10689	AAD	IEEE 802.11ax (20MHz, MCS6, 99pc dc)	WLAN	8.55	± 9.6 %
10690	AAE	IEEE 802.11ax (20MHz, MCS7, 99pc dc)	WLAN	8.29	± 9.6 %
10691	AAB	IEEE 802.11ax (20MHz, MCS8, 99pc dc)	WLAN	8.25	± 9.6 %
10692	AAA	IEEE 802.11ax (20MHz, MCS9, 99pc dc)	WLAN	8.29	± 9.6 %
10693	AAA	IEEE 802.11ax (20MHz, MCS10, 99pc dc)	WLAN	8.25	± 9.6 %
10694	AAA	IEEE 802.11ax (20MHz, MCS11, 99pc dc)	WLAN	8.57	± 9.6 %
10695	AAA	IEEE 802.11ax (40MHz, MCS0, 90pc dc)	WLAN	8.78	± 9.6 %
10696	AAA	IEEE 802.11ax (40MHz, MCS1, 90pc dc)	WLAN	8.91	± 9.6 %
10697	AAA	IEEE 802.11ax (40MHz, MCS2, 90pc dc)	WLAN	8.61	± 9.6 %
10698	AAA	IEEE 802.11ax (40MHz, MCS3, 90pc dc)	WLAN	8.89	± 9.6 %
10699	AAA	IEEE 802.11ax (40MHz, MCS4, 90pc dc)	WLAN	8.82	± 9.6 %
10700	AAA	IEEE 802.11ax (40MHz, MCS5, 90pc dc)	WLAN	8.73	± 9.6 %
10701	AAA	IEEE 802.11ax (40MHz, MCS6, 90pc dc)	WLAN	8.86	± 9.6 %
10702	AAA	IEEE 802.11ax (40MHz, MCS7, 90pc dc)	WLAN	8.70	± 9.6 %
10703	AAA	IEEE 802.11ax (40MHz, MCS8, 90pc dc)	WLAN	8.82	± 9.6 %
10704	AAA	IEEE 802.11ax (40MHz, MCS9, 90pc dc)	WLAN	8.56	± 9.6 %
10705	AAA	IEEE 802.11ax (40MHz, MCS10, 90pc dc)	WLAN	8.69	± 9.6 %
10706	AAC	IEEE 802.11ax (40MHz, MCS11, 90pc dc)	WLAN	8.66	± 9.6 %
10707	AAC	IEEE 802.11ax (40MHz, MCS0, 99pc dc)	WLAN	8.32	± 9.6 %
10708	AAC	IEEE 802.11ax (40MHz, MCS1, 99pc dc)	WLAN	8.55	± 9.6 %
10709	AAC	IEEE 802.11ax (40MHz, MCS2, 99pc dc)	WLAN	8.33	± 9.6 %
10710	AAC	IEEE 802.11ax (40MHz, MCS3, 99pc dc)	WLAN	8.29	± 9.6 %
10711	AAC	IEEE 802.11ax (40MHz, MCS4, 99pc dc)	WLAN	8.39	± 9.6 %
10712	AAC	IEEE 802.11ax (40MHz, MCS5, 99pc dc)	WLAN	8.67	± 9.6 %
10713	AAC	IEEE 802.11ax (40MHz, MCS6, 99pc dc)	WLAN	8.33	± 9.6 %
10714	AAC	IEEE 802.11ax (40MHz, MCS7, 99pc dc)	WLAN	8.26	± 9.6 %
10715	AAC	IEEE 802.11ax (40MHz, MCS8, 99pc dc)	WLAN	8.45	± 9.6 %
10716	AAC	IEEE 802.11ax (40MHz, MCS9, 99pc dc)	WLAN	8.30	± 9.6 %
10717	AAC	IEEE 802.11ax (40MHz, MCS10, 99pc dc)	WLAN	8.48	± 9.6 %
10718	AAC	IEEE 802.11ax (40MHz, MCS11, 99pc dc)	WLAN	8.24	± 9.6 %
10719	AAC	IEEE 802.11ax (80MHz, MCS0, 90pc dc)	WLAN	8.81	± 9.6 %
10720	AAC	IEEE 802.11ax (80MHz, MCS1, 90pc dc)	WLAN	8.87	± 9.6 %
10721	AAC	IEEE 802.11ax (80MHz, MCS2, 90pc dc)	WLAN	8.76	± 9.6 %
10722	AAC	IEEE 802.11ax (80MHz, MCS3, 90pc dc)	WLAN	8.55	± 9.6 %
10723	AAC	IEEE 802.11ax (80MHz, MCS4, 90pc dc)	WLAN	8.70	± 9.6 %
10724	AAC	IEEE 802.11ax (80MHz, MCS5, 90pc dc)	WLAN	8.90	± 9.6 %
10725	AAC	IEEE 802.11ax (80MHz, MCS6, 90pc dc)	WLAN	8.74	± 9.6 %
10726	AAC	IEEE 802.11ax (80MHz, MCS7, 90pc dc)	WLAN	8.72	± 9.6 %
10727	AAC	IEEE 802.11ax (80MHz, MCS8, 90pc dc)	WLAN	8.66	± 9.6 %

10728	AAC	IEEE 802.11ax (80MHz, MCS9, 99pc dc)	WLAN	8.65	± 9.6 %
10729	AAC	IEEE 802.11ax (80MHz, MCS10, 99pc dc)	WLAN	8.64	± 9.6 %
10730	AAC	IEEE 802.11ax (80MHz, MCS11, 99pc dc)	WLAN	8.67	± 9.6 %
10731	AAC	IEEE 802.11ax (80MHz, MCS0, 99pc dc)	WLAN	8.42	± 9.6 %
10732	AAC	IEEE 802.11ax (80MHz, MCS1, 99pc dc)	WLAN	8.46	± 9.6 %
10733	AAC	IEEE 802.11ax (80MHz, MCS2, 99pc dc)	WLAN	8.40	± 9.6 %
10734	AAC	IEEE 802.11ax (80MHz, MCS3, 99pc dc)	WLAN	8.25	± 9.6 %
10735	AAC	IEEE 802.11ax (80MHz, MCS4, 99pc dc)	WLAN	8.33	± 9.6 %
10736	AAC	IEEE 802.11ax (80MHz, MCS5, 99pc dc)	WLAN	8.27	± 9.6 %
10737	AAC	IEEE 802.11ax (80MHz, MCS6, 99pc dc)	WLAN	8.36	± 9.6 %
10738	AAC	IEEE 802.11ax (80MHz, MCS7, 99pc dc)	WLAN	8.42	± 9.6 %
10739	AAC	IEEE 802.11ax (80MHz, MCS8, 99pc dc)	WLAN	8.29	± 9.6 %
10740	AAC	IEEE 802.11ax (80MHz, MCS9, 99pc dc)	WLAN	8.48	± 9.6 %
10741	AAC	IEEE 802.11ax (80MHz, MCS10, 99pc dc)	WLAN	8.40	± 9.6 %
10742	AAC	IEEE 802.11ax (80MHz, MCS11, 99pc dc)	WLAN	8.43	± 9.6 %
10743	AAC	IEEE 802.11ax (160MHz, MCS0, 99pc dc)	WLAN	8.94	± 9.6 %
10744	AAC	IEEE 802.11ax (160MHz, MCS1, 99pc dc)	WLAN	9.16	± 9.6 %
10745	AAC	IEEE 802.11ax (160MHz, MCS2, 99pc dc)	WLAN	8.93	± 9.6 %
10746	AAC	IEEE 802.11ax (160MHz, MCS3, 99pc dc)	WLAN	9.11	± 9.6 %
10747	AAC	IEEE 802.11ax (160MHz, MCS4, 99pc dc)	WLAN	9.04	± 9.6 %
10748	AAC	IEEE 802.11ax (160MHz, MCS5, 99pc dc)	WLAN	8.93	± 9.6 %
10749	AAC	IEEE 802.11ax (160MHz, MCS6, 99pc dc)	WLAN	8.90	± 9.6 %
10750	AAC	IEEE 802.11ax (160MHz, MCS7, 99pc dc)	WLAN	8.79	± 9.6 %
10751	AAC	IEEE 802.11ax (160MHz, MCS8, 99pc dc)	WLAN	8.82	± 9.6 %
10752	AAC	IEEE 802.11ax (160MHz, MCS9, 99pc dc)	WLAN	8.81	± 9.6 %
10753	AAC	IEEE 802.11ax (160MHz, MCS10, 99pc dc)	WLAN	9.00	± 9.6 %
10754	AAC	IEEE 802.11ax (160MHz, MCS11, 99pc dc)	WLAN	8.94	± 9.6 %
10755	AAC	IEEE 802.11ax (160MHz, MCS0, 99pc dc)	WLAN	8.64	± 9.6 %
10756	AAC	IEEE 802.11ax (160MHz, MCS1, 99pc dc)	WLAN	8.77	± 9.6 %
10757	AAC	IEEE 802.11ax (160MHz, MCS2, 99pc dc)	WLAN	8.77	± 9.6 %
10758	AAC	IEEE 802.11ax (160MHz, MCS3, 99pc dc)	WLAN	8.69	± 9.6 %
10759	AAC	IEEE 802.11ax (160MHz, MCS4, 99pc dc)	WLAN	8.58	± 9.6 %
10760	AAC	IEEE 802.11ax (160MHz, MCS5, 99pc dc)	WLAN	8.49	± 9.6 %
10761	AAC	IEEE 802.11ax (160MHz, MCS6, 99pc dc)	WLAN	8.58	± 9.6 %
10762	AAC	IEEE 802.11ax (160MHz, MCS7, 99pc dc)	WLAN	8.49	± 9.6 %
10763	AAC	IEEE 802.11ax (160MHz, MCS8, 99pc dc)	WLAN	8.53	± 9.6 %
10764	AAC	IEEE 802.11ax (160MHz, MCS9, 99pc dc)	WLAN	8.54	± 9.6 %
10765	AAC	IEEE 802.11ax (160MHz, MCS10, 99pc dc)	WLAN	8.54	± 9.6 %
10766	AAC	IEEE 802.11ax (160MHz, MCS11, 99pc dc)	WLAN	8.51	± 9.6 %
10767	AAC	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	7.99	± 9.6 %
10768	AAC	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	± 9.6 %
10769	AAC	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	± 9.6 %
10770	AAC	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	± 9.6 %
10771	AAC	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	± 9.6 %
10772	AAC	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.23	± 9.6 %
10773	AAC	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.03	± 9.6 %
10774	AAC	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	± 9.6 %
10775	AAC	5G NR (CP-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	± 9.6 %
10776	AAC	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.30	± 9.6 %
10777	AAC	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.30	± 9.6 %
10778	AAC	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10779	AAC	5G NR (CP-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.42	± 9.6 %
10780	AAC	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	± 9.6 %
10781	AAC	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	± 9.6 %
10782	AAC	5G NR (CP-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.43	± 9.6 %
10783	AAC	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	± 9.6 %

10784	AAC	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.29	± 9.6 %
10785	AAC	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.40	± 9.6 %
10786	AAC	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.35	± 9.6 %
10787	AAC	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.44	± 9.6 %
10788	AAC	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	± 9.6 %
10789	AAC	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.37	± 9.6 %
10790	AAC	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	± 9.6 %
10791	AAC	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.83	± 9.6 %
10792	AAC	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.92	± 9.6 %
10793	AAC	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.95	± 9.6 %
10794	AAC	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	± 9.6 %
10795	AAC	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.84	± 9.6 %
10796	AAC	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	± 9.6 %
10797	AAC	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.01	± 9.6 %
10798	AAC	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.89	± 9.6 %
10799	AAC	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	± 9.6 %
10801	AAC	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.89	± 9.6 %
10802	AAC	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.87	± 9.6 %
10803	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	± 9.6 %
10805	AAD	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10806	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.37	± 9.6 %
10809	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10810	AAD	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10812	AAD	5G NR (CP-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	± 9.6 %
10817	AAD	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	± 9.6 %
10818	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10819	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.33	± 9.6 %
10820	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.30	± 9.6 %
10821	AAC	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	± 9.6 %
10822	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	± 9.6 %
10823	AAC	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.36	± 9.6 %
10824	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.39	± 9.6 %
10825	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	± 9.6 %
10827	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.42	± 9.6 %
10828	AAE	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.43	± 9.6 %
10829	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.40	± 9.6 %
10830	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.63	± 9.6 %
10831	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.73	± 9.6 %
10832	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.74	± 9.6 %
10833	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	± 9.6 %
10834	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.75	± 9.6 %
10835	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	± 9.6 %
10836	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.66	± 9.6 %
10837	AAD	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.68	± 9.6 %
10839	AAD	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	± 9.6 %
10840	AAD	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.67	± 9.6 %
10841	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.71	± 9.6 %
10843	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.49	± 9.6 %
10844	AAD	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10846	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	± 9.6 %
10854	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10855	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	± 9.6 %
10856	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	± 9.6 %
10857	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.35	± 9.6 %
10858	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	± 9.6 %
10859	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	± 9.6 %

10860	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	± 9.6 %
10861	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.40	± 9.6 %
10863	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	± 9.6 %
10864	AAD	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	± 9.6 %
10865	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	± 9.6 %
10866	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.6 %
10868	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.89	± 9.6 %
10869	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	± 9.6 %
10870	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.86	± 9.6 %
10871	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	5.75	± 9.6 %
10872	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.52	± 9.6 %
10873	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	± 9.6 %
10874	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	± 9.6 %
10875	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	± 9.6 %
10876	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.39	± 9.6 %
10877	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	7.95	± 9.6 %
10878	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.41	± 9.6 %
10879	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.12	± 9.6 %
10880	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.38	± 9.6 %
10881	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	± 9.6 %
10882	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.96	± 9.6 %
10883	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.57	± 9.6 %
10884	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.53	± 9.6 %
10885	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	± 9.6 %
10886	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	± 9.6 %
10887	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	± 9.6 %
10888	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.35	± 9.6 %
10889	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.02	± 9.6 %
10890	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.40	± 9.6 %
10891	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.13	± 9.6 %
10892	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.41	± 9.6 %
10897	AAD	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.66	± 9.6 %
10898	AAD	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	± 9.6 %
10899	AAD	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	± 9.6 %
10900	AAD	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.6 %
10901	AAD	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.6 %
10902	AAD	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.6 %
10903	AAD	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.6 %
10904	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.6 %
10905	AAD	5G NR (DFT-s-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.6 %
10906	AAD	5G NR (DFT-s-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.6 %
10907	AAD	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.78	± 9.6 %
10908	AAD	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	± 9.6 %
10909	AAD	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.96	± 9.6 %
10910	AAD	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	± 9.6 %
10911	AAD	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	± 9.6 %
10912	AAD	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 9.6 %
10913	AAD	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 9.6 %
10914	AAD	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.85	± 9.6 %
10915	AAD	5G NR (DFT-s-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	± 9.6 %
10916	AAD	5G NR (DFT-s-OFDM, 50% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	± 9.6 %
10917	AAD	5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	± 9.6 %
10918	AAD	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	± 9.6 %
10919	AAD	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	± 9.6 %
10920	AAD	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	± 9.6 %
10921	AAD	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 9.6 %

10922	AAD	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.82	± 9.6 %
10923	AAD	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 9.6 %
10924	AAD	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 9.6 %
10925	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.95	± 9.6 %
10926	AAD	5G NR (DFT-s-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 9.6 %
10927	AAD	5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	± 9.6 %
10928	AAD	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	± 9.6 %
10929	AAD	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	± 9.6 %
10930	AAD	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	± 9.6 %
10931	AAD	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	± 9.6 %
10932	AAB	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	± 9.6 %
10933	AAA	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	± 9.6 %
10934	AAA	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	± 9.6 %
10935	AAA	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	± 9.6 %
10936	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	± 9.6 %
10937	AAB	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.77	± 9.6 %
10938	AAB	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	± 9.6 %
10939	AAB	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.82	± 9.6 %
10940	AAB	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.89	± 9.6 %
10941	AAB	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	± 9.6 %
10942	AAB	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	± 9.6 %
10943	AAB	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.95	± 9.6 %
10944	AAB	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.81	± 9.6 %
10945	AAB	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	± 9.6 %
10946	AAC	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	± 9.6 %
10947	AAB	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	± 9.6 %
10948	AAB	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	± 9.6 %
10949	AAB	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	± 9.6 %
10950	AAB	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	± 9.6 %
10951	AAB	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.92	± 9.6 %
10952	AAB	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.25	± 9.6 %
10953	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.15	± 9.6 %
10954	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.23	± 9.6 %
10955	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.42	± 9.6 %
10956	AAB	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.14	± 9.6 %
10957	AAC	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.31	± 9.6 %
10958	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.61	± 9.6 %
10959	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.33	± 9.6 %
10960	AAB	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.32	± 9.6 %
10961	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.36	± 9.6 %
10962	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.40	± 9.6 %
10963	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.55	± 9.6 %
10964	AAB	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.29	± 9.6 %
10965	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.37	± 9.6 %
10966	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.55	± 9.6 %
10967	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.42	± 9.6 %
10968	AAB	5G NR DL (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.49	± 9.6 %
10972	AAB	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	11.59	± 9.6 %
10973	AAB	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	9.06	± 9.6 %
10974	AAB	5G NR (CP-OFDM, 100% RB, 100 MHz, 256-QAM, 30 kHz)	5G NR FR1 TDD	10.28	± 9.6 %

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.