

802.11ax (HE20) - Channel 36


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3434.37 PK	57.1	68.2	-11.1	-49.94	-48.82	8.17	-38.16
2	6907.81 PK	60.89	68.2	-7.31	-45	-46.17	8.17	-34.37
3	10360.93 PK	60.42	68.2	-7.78	-45.71	-46.35	8.17	-34.84
4	15551.31 PK	53.45	74	-20.55	-52.4	-53.67	8.17	-41.81
5	15542.68 AV	42.46	54	-11.54	-63.93	-64.03	8.17	-52.8


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

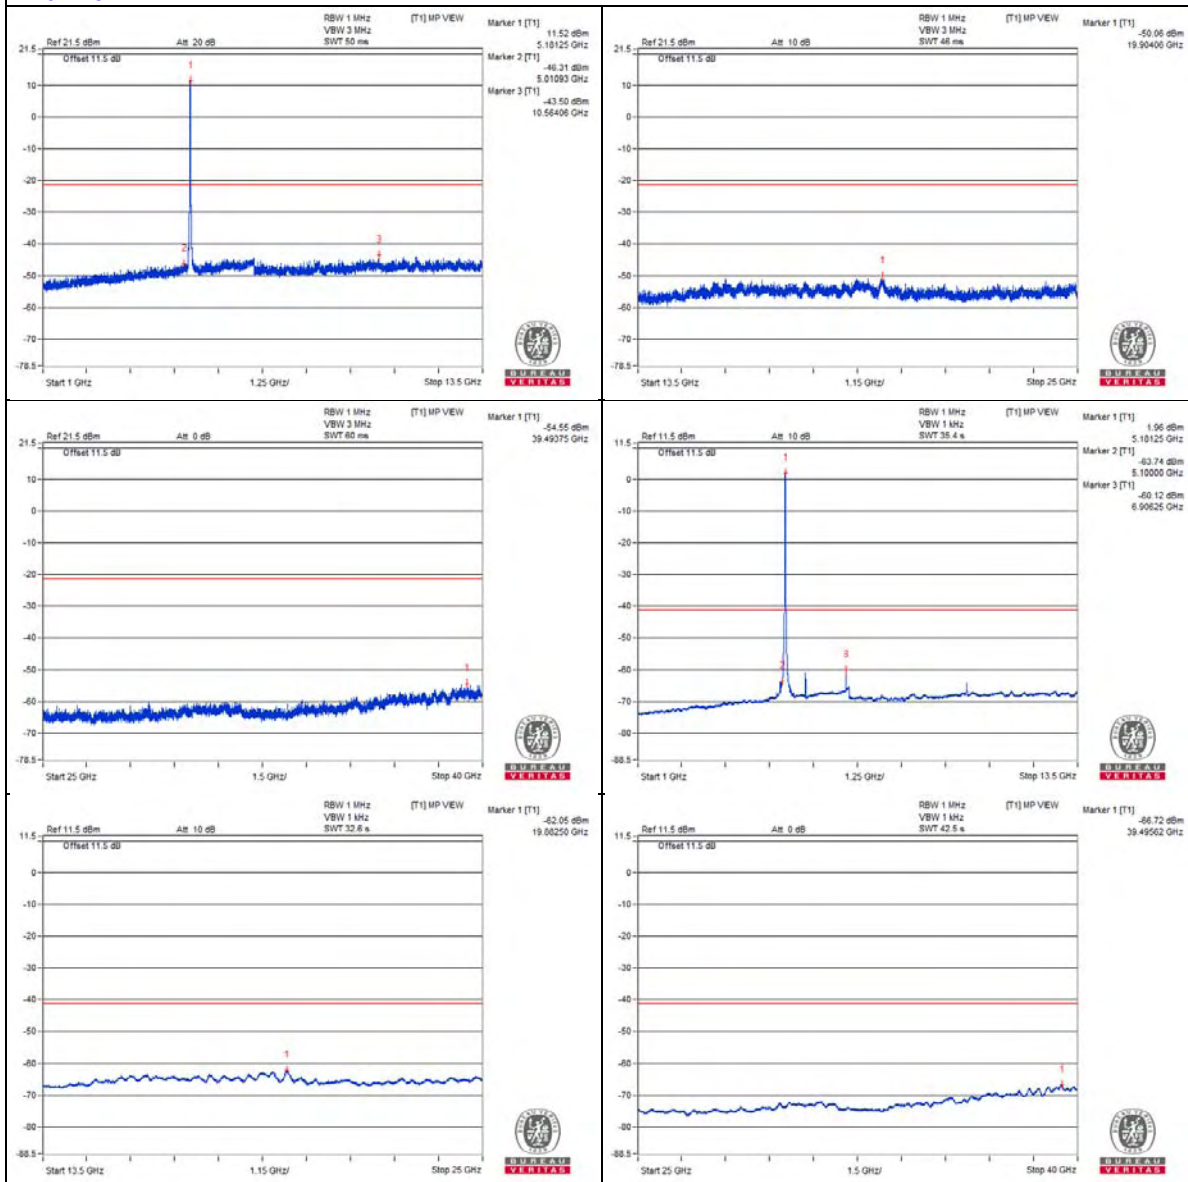

Chain 1

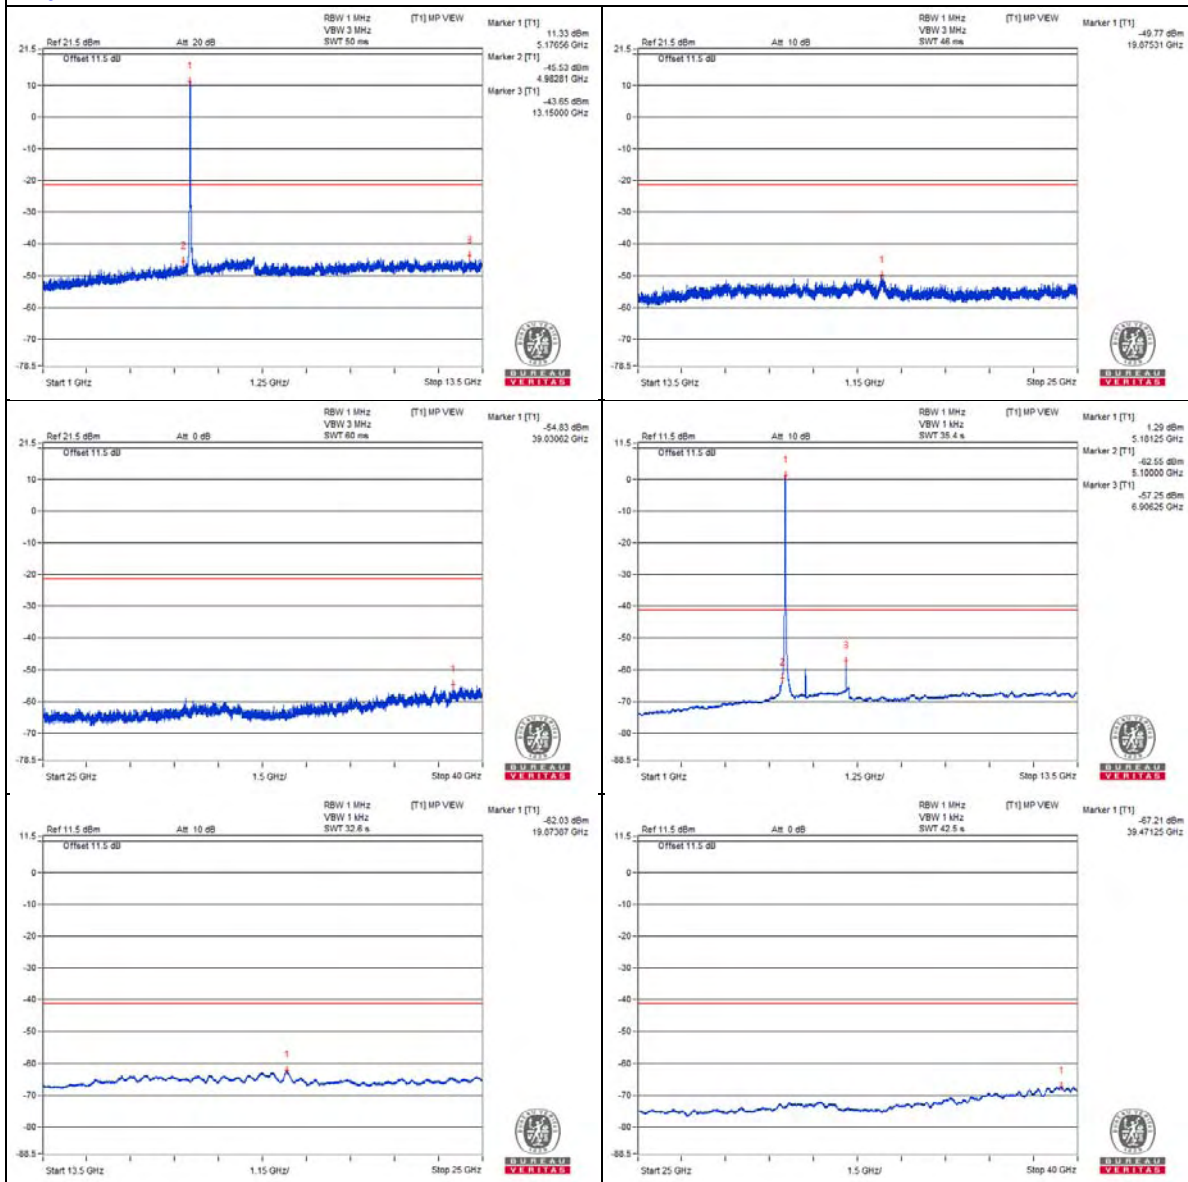

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5149.75 PK	72.63	74	-1.37	-29.89	-36.27	6.36	-22.63
2	5149.85 AV	57.23	54	*3.23	-46.04	-49.39	6.36	-38.03


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

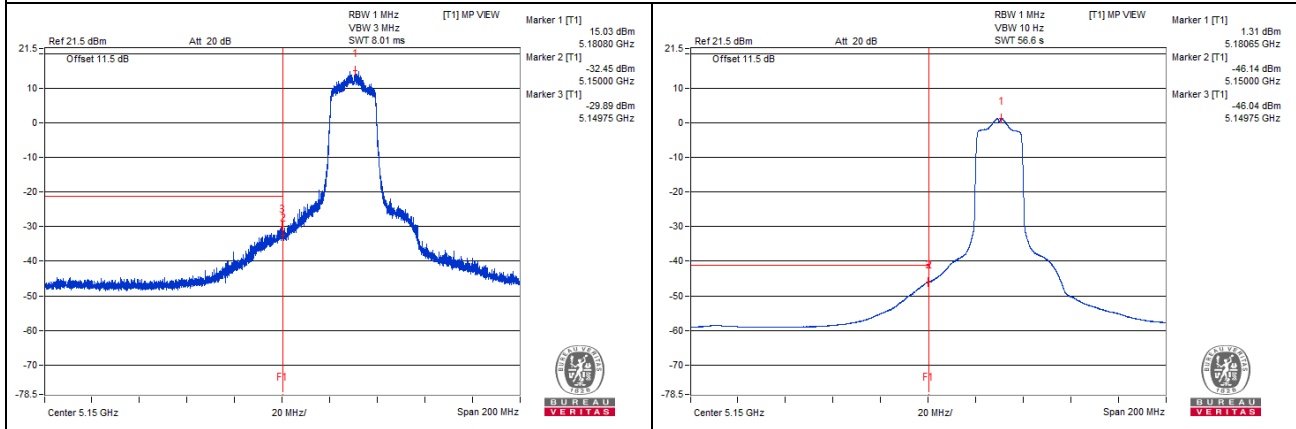

Chain 1

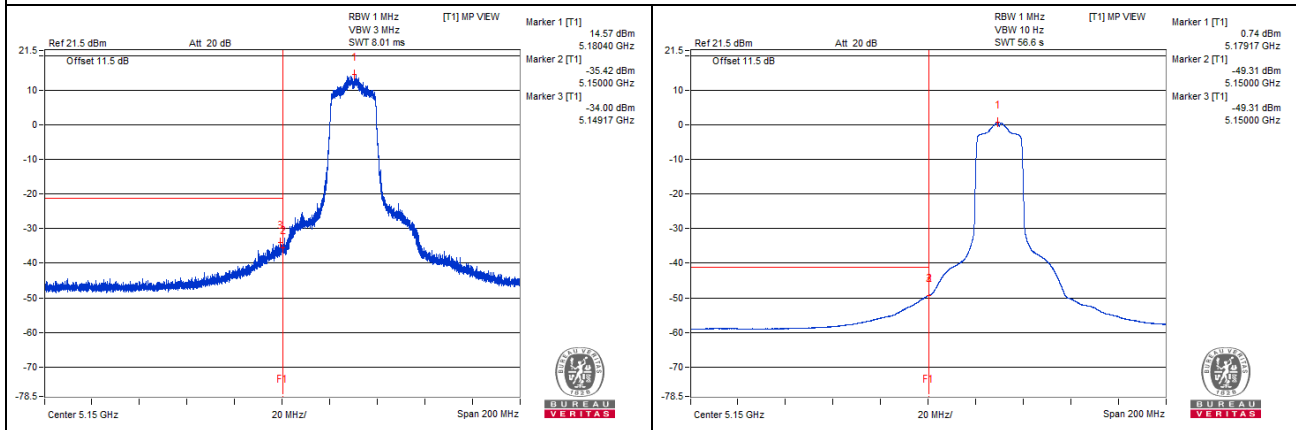

802.11ax (HE20) - Channel 40


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3454.68 PK	57.3	68.2	-10.9	-49.53	-48.79	8.17	-37.96
2	6932.81 PK	62.41	68.2	-5.79	-44.13	-43.93	8.17	-32.85
3	10412.5 PK	60.07	68.2	-8.13	-45.41	-47.6	8.17	-35.19
4	15598.75 PK	53.63	74	-20.37	-54.73	-51.49	8.17	-41.63
5	15598.75 AV	41.96	54	-12.04	-64.76	-64.22	8.17	-53.3


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

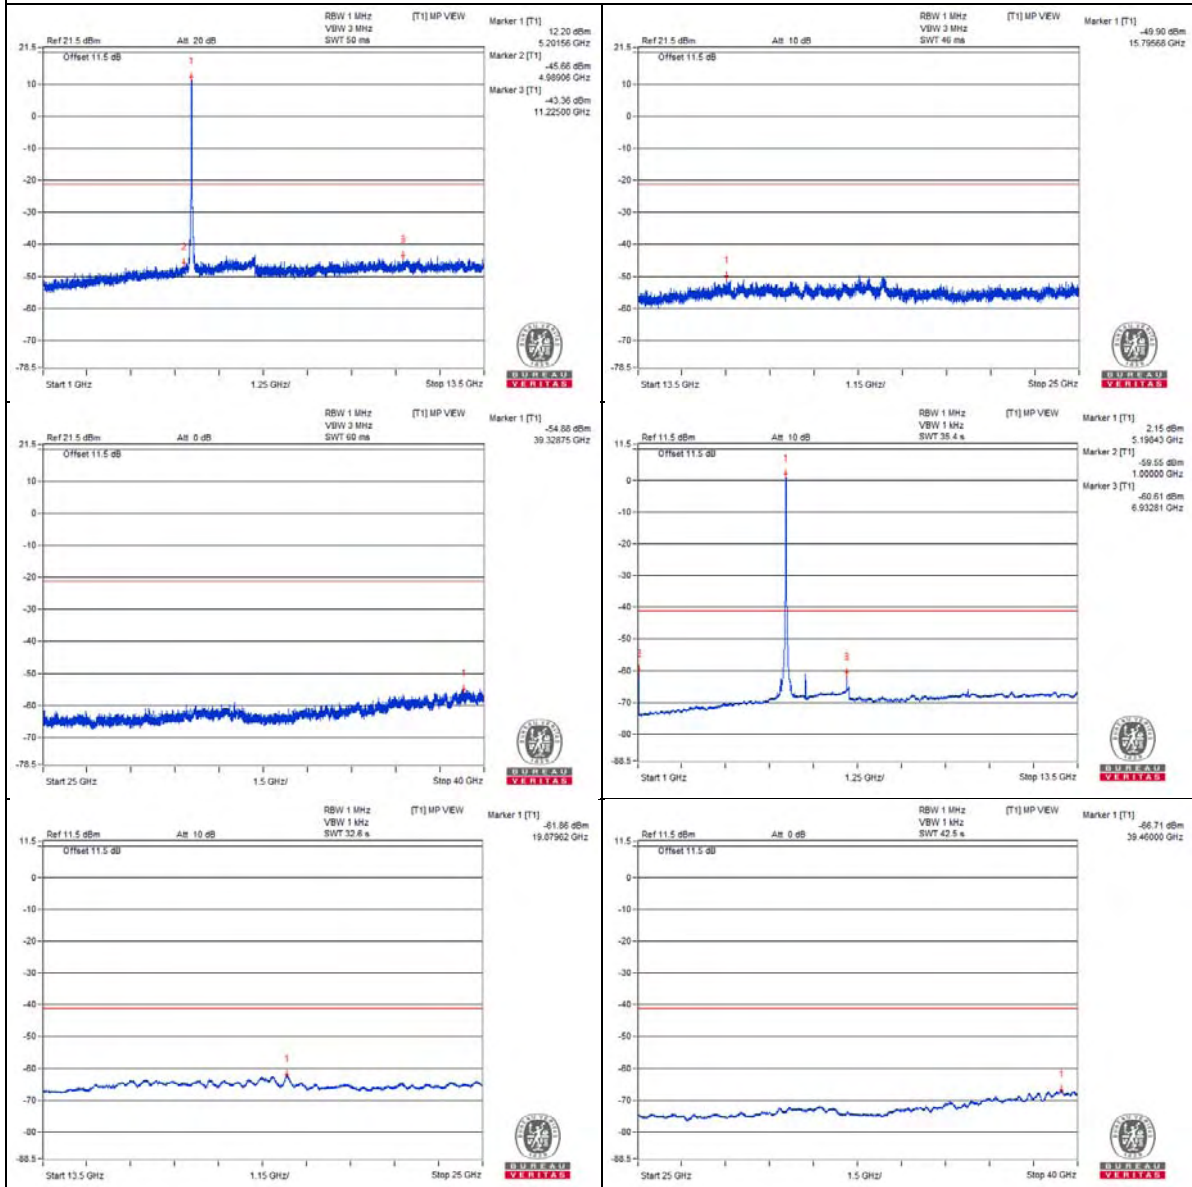

Chain 1

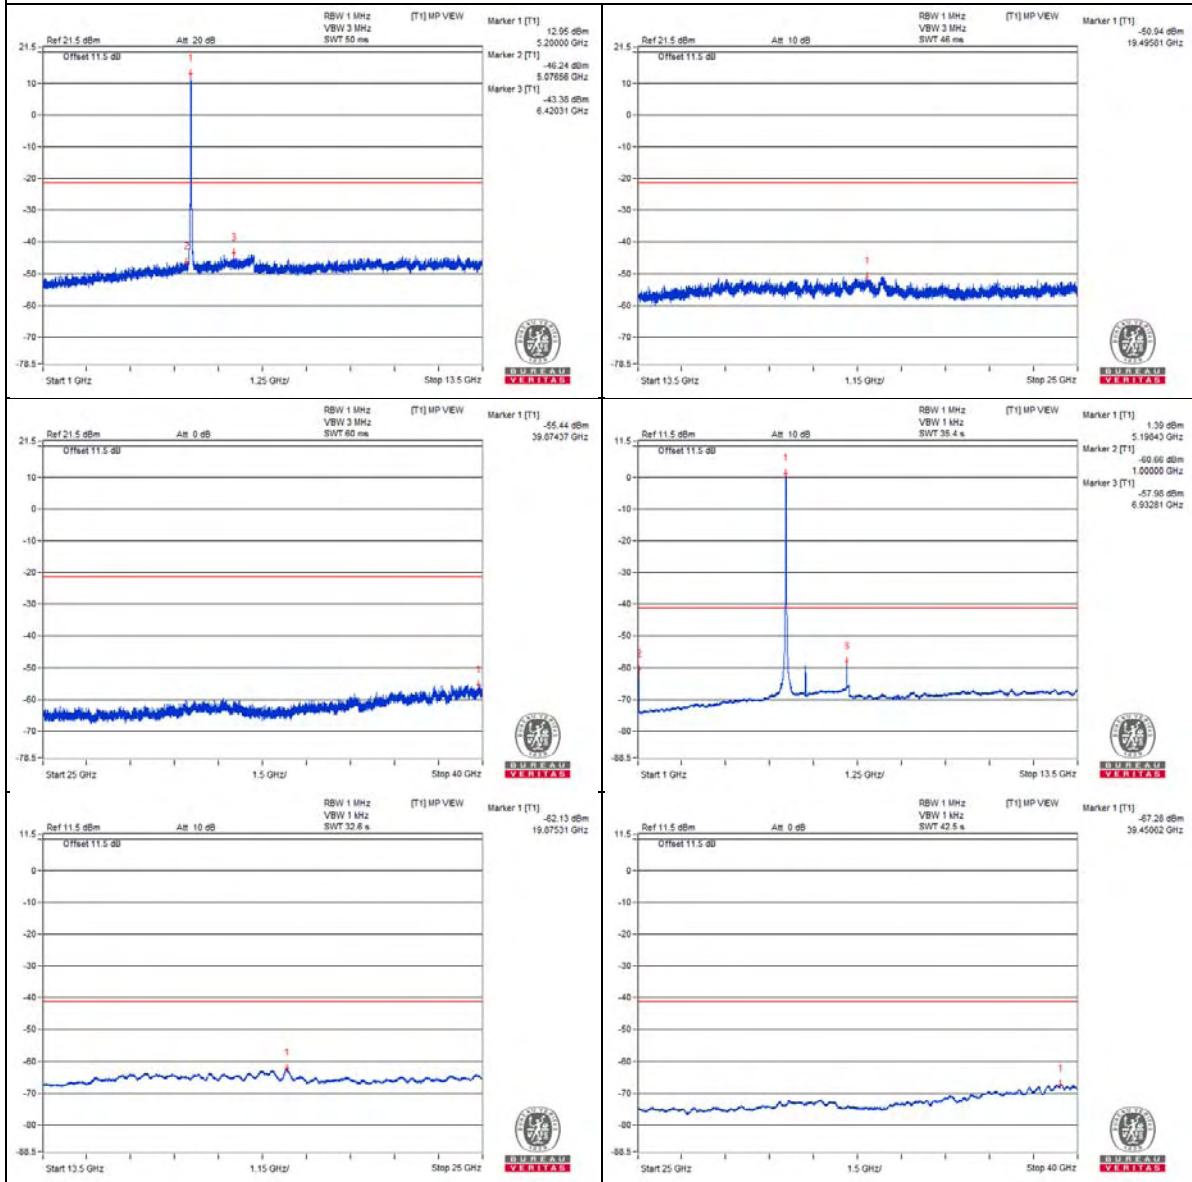

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5148.97 PK	64.63	74	-9.37	-38.6	-42.09	6.36	-30.63
2	5149.87 AV	49.64	54	-4.36	-54.12	-56.07	6.36	-45.62

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

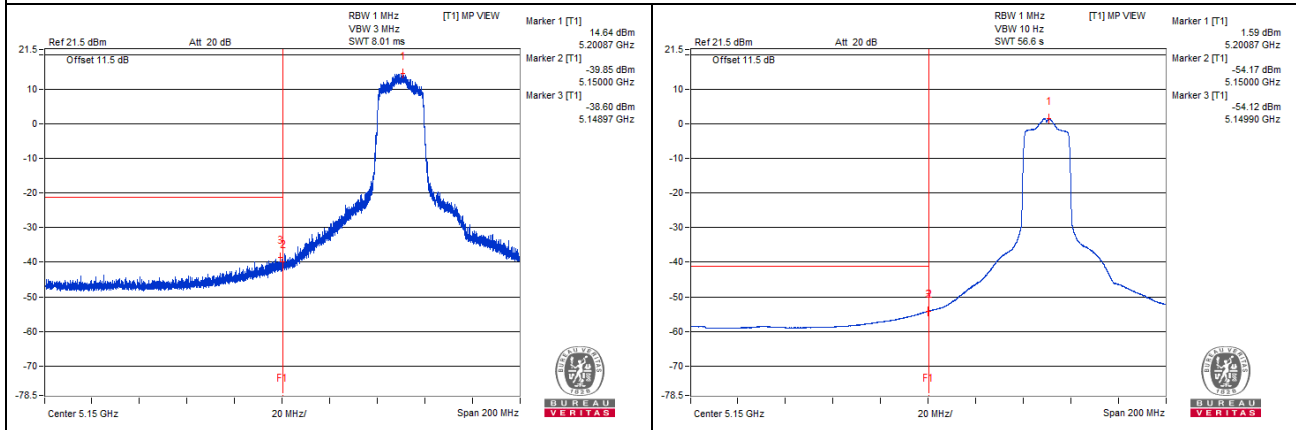

Chain 1

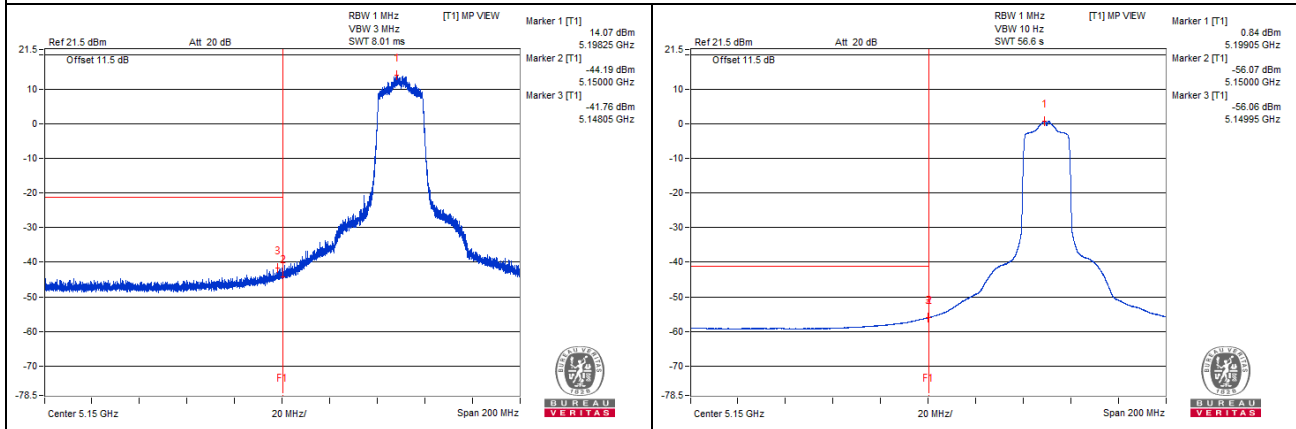

802.11ax (HE20) - Channel 48


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3512.22 PK	56.46	74	-17.54	-48.93	-50.46	7.82	-38.8
2	3512.5 AV	35.28	54	-18.72	-70.8	-70.82	7.82	-59.98
3	6990.62 PK	61.86	68.2	-6.34	-42.96	-46.02	7.82	-33.4
4	10476.56 PK	60.88	68.2	-7.32	-44.49	-46.07	7.82	-34.38
5	15719.5 PK	53.06	74	-20.94	-52.56	-53.55	7.82	-42.2
6	15735.31 AV	41.7	54	-12.3	-64.27	-64.52	7.82	-53.56


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

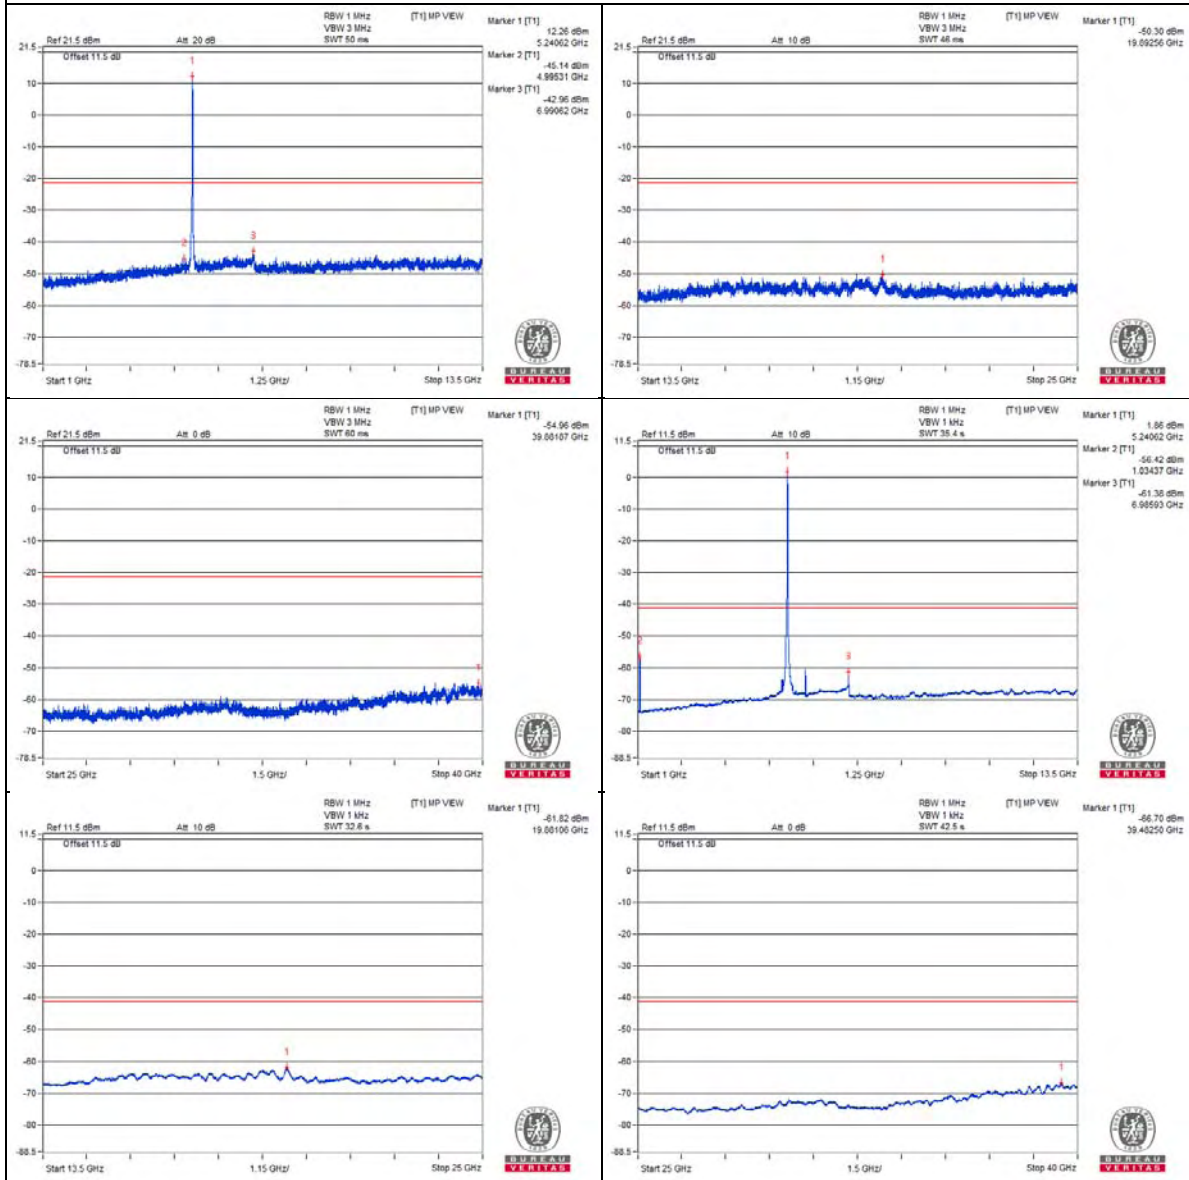

Chain 1

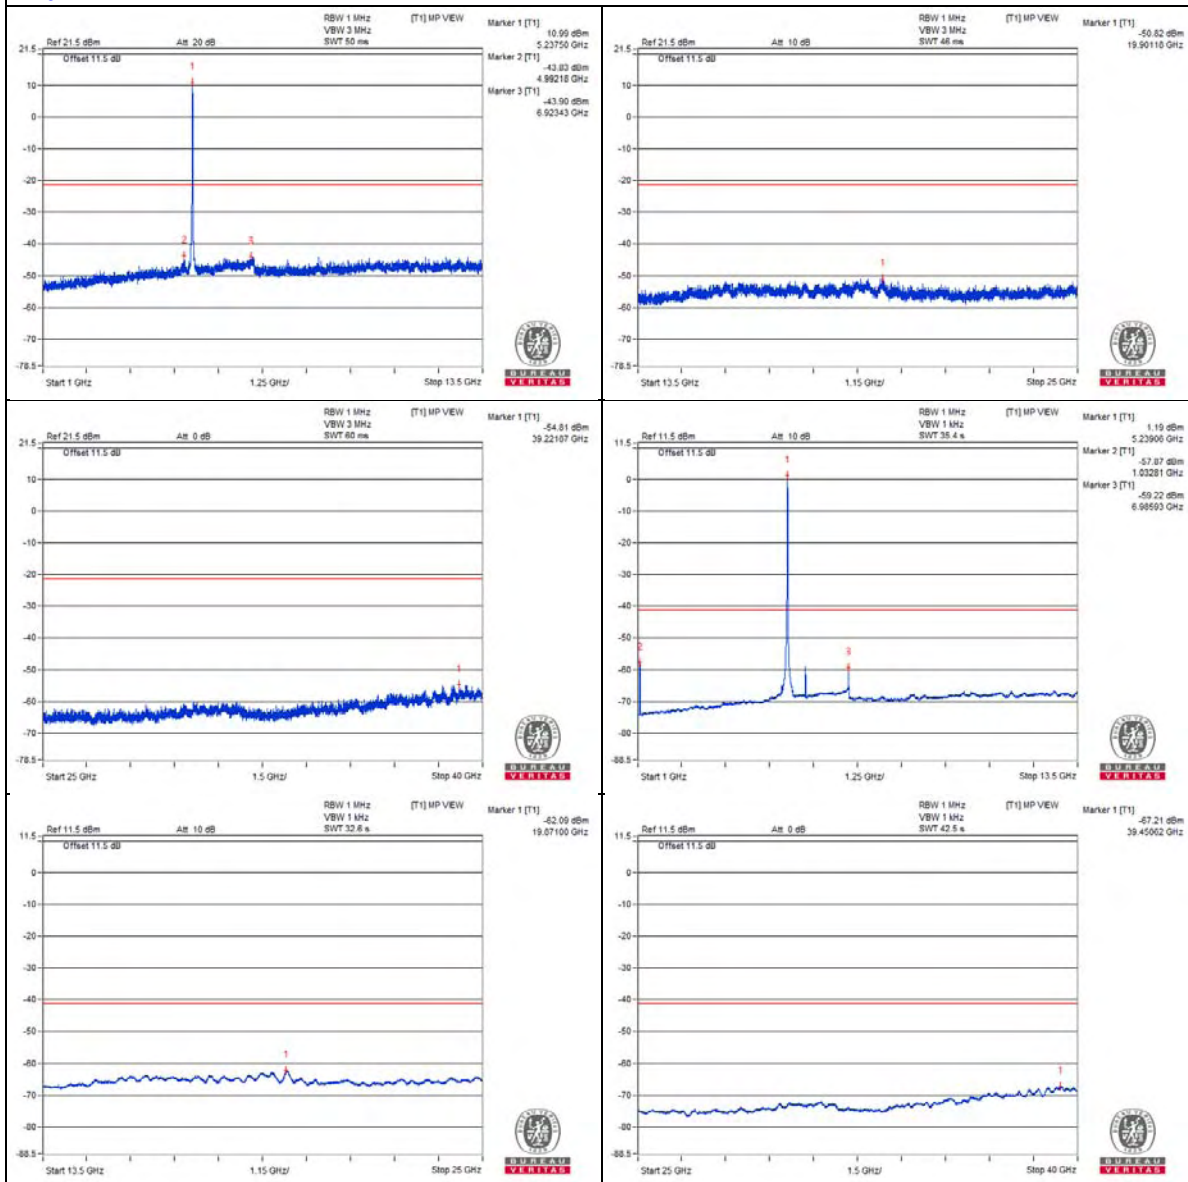

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5089.8 PK	59.09	74	-14.91	-44.85	-46.36	6.36	-36.17
2	5149.82 AV	45.67	54	-8.33	-59.03	-58.9	6.36	-49.59

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

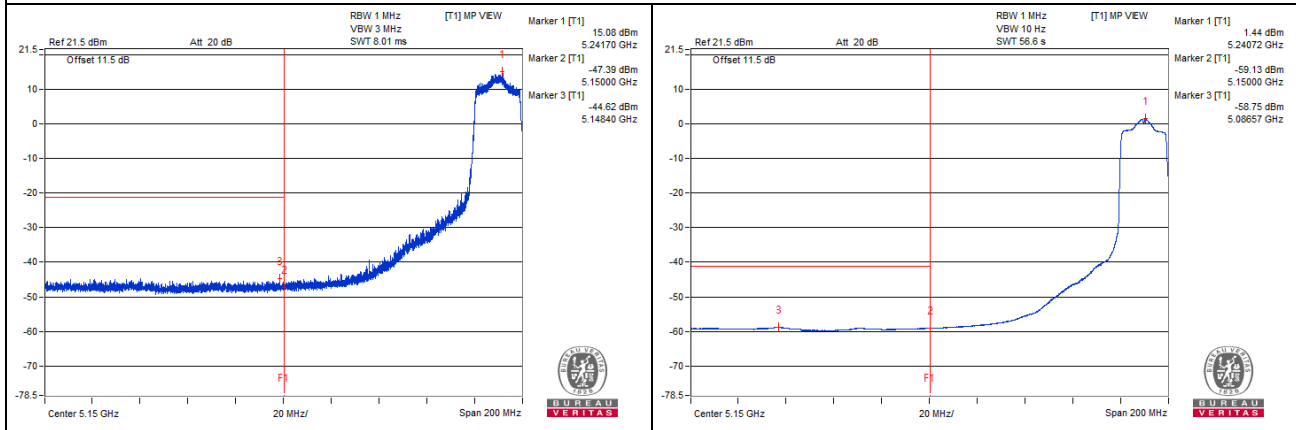

Chain 1

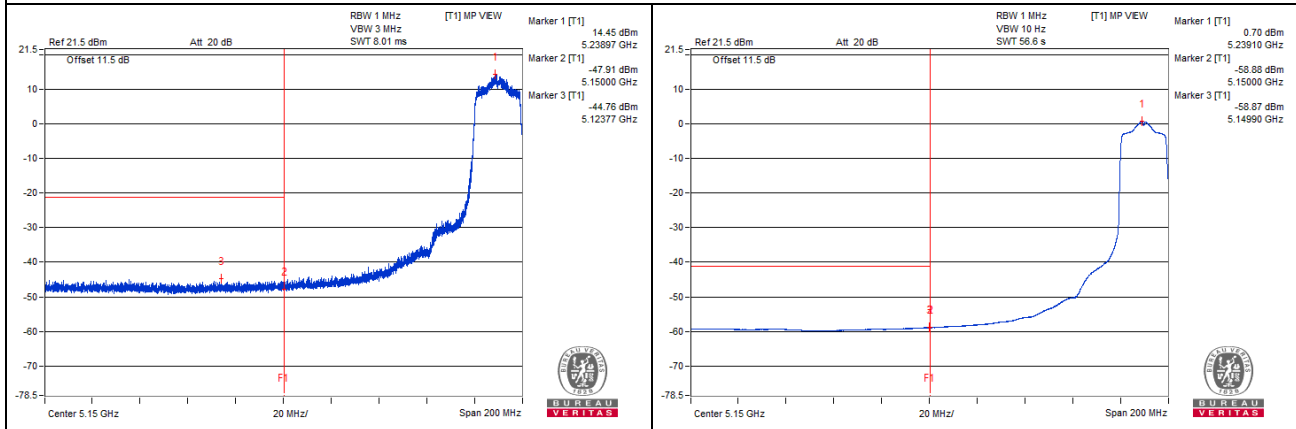

802.11ax (HE20) - Channel 52

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3518.75 PK	57.82	74	-16.18	-50.2	-47.46	8.17	-37.44
2	3526.56 AV	35.7	54	-18.3	-70.78	-70.7	8.17	-59.56
3	6993.75 PK	61.71	68.2	-6.49	-44.79	-44.68	8.17	-33.55
4	10517.18 PK	60.66	68.2	-7.54	-46.55	-45.12	8.17	-34.6
5	15775.56 PK	54.5	74	-19.5	-51.93	-51.95	8.17	-40.76
6	15781.31 AV	42.51	54	-11.49	-63.73	-64.14	8.17	-52.75

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

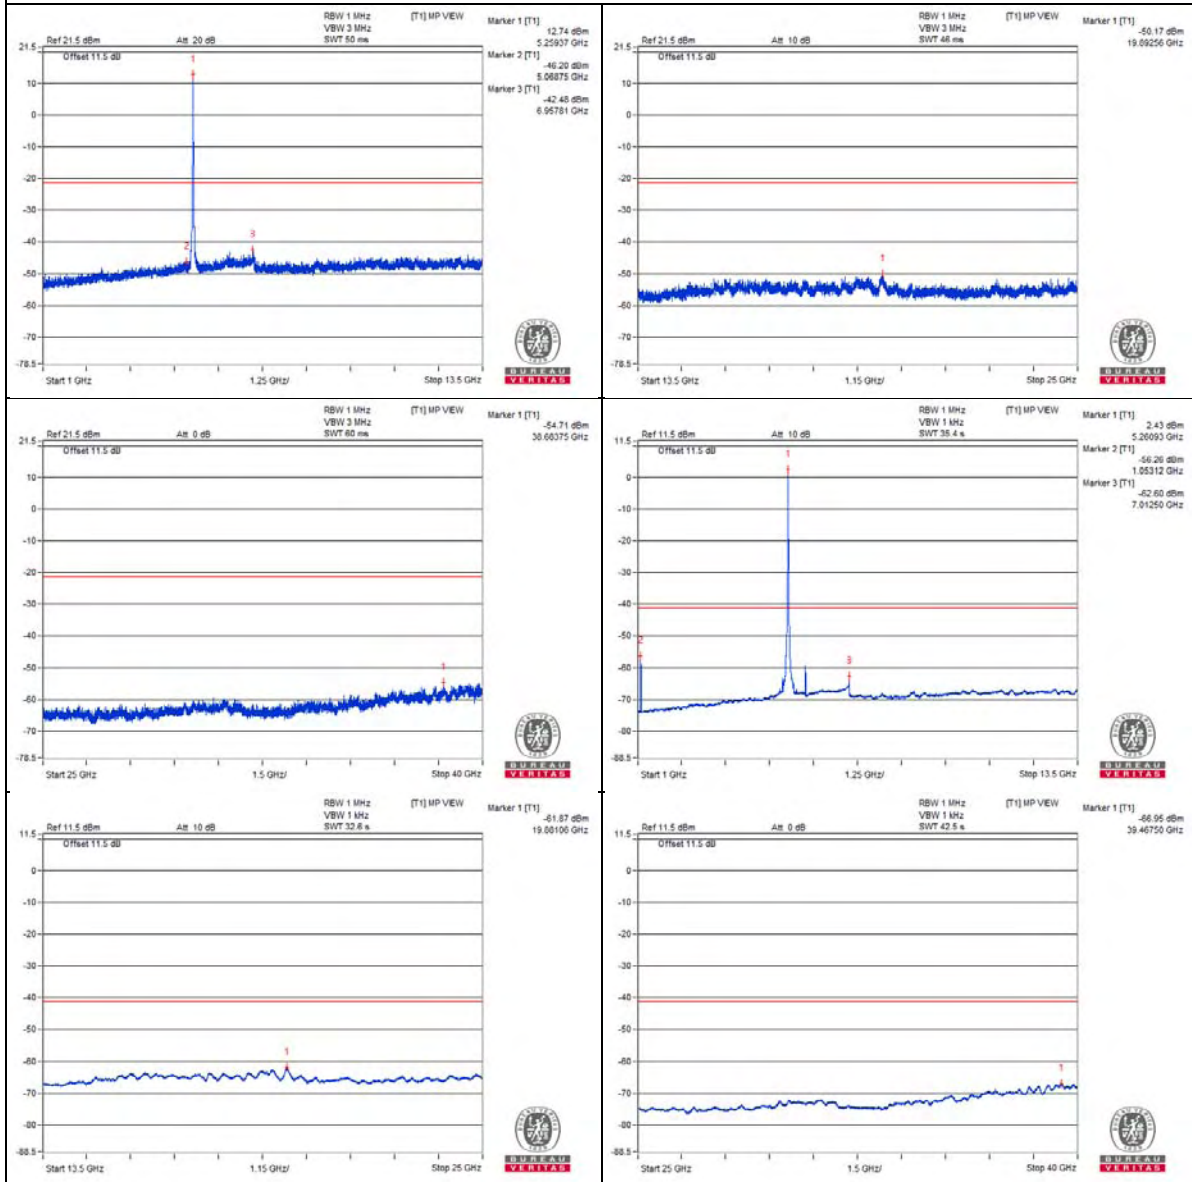

Chain 1

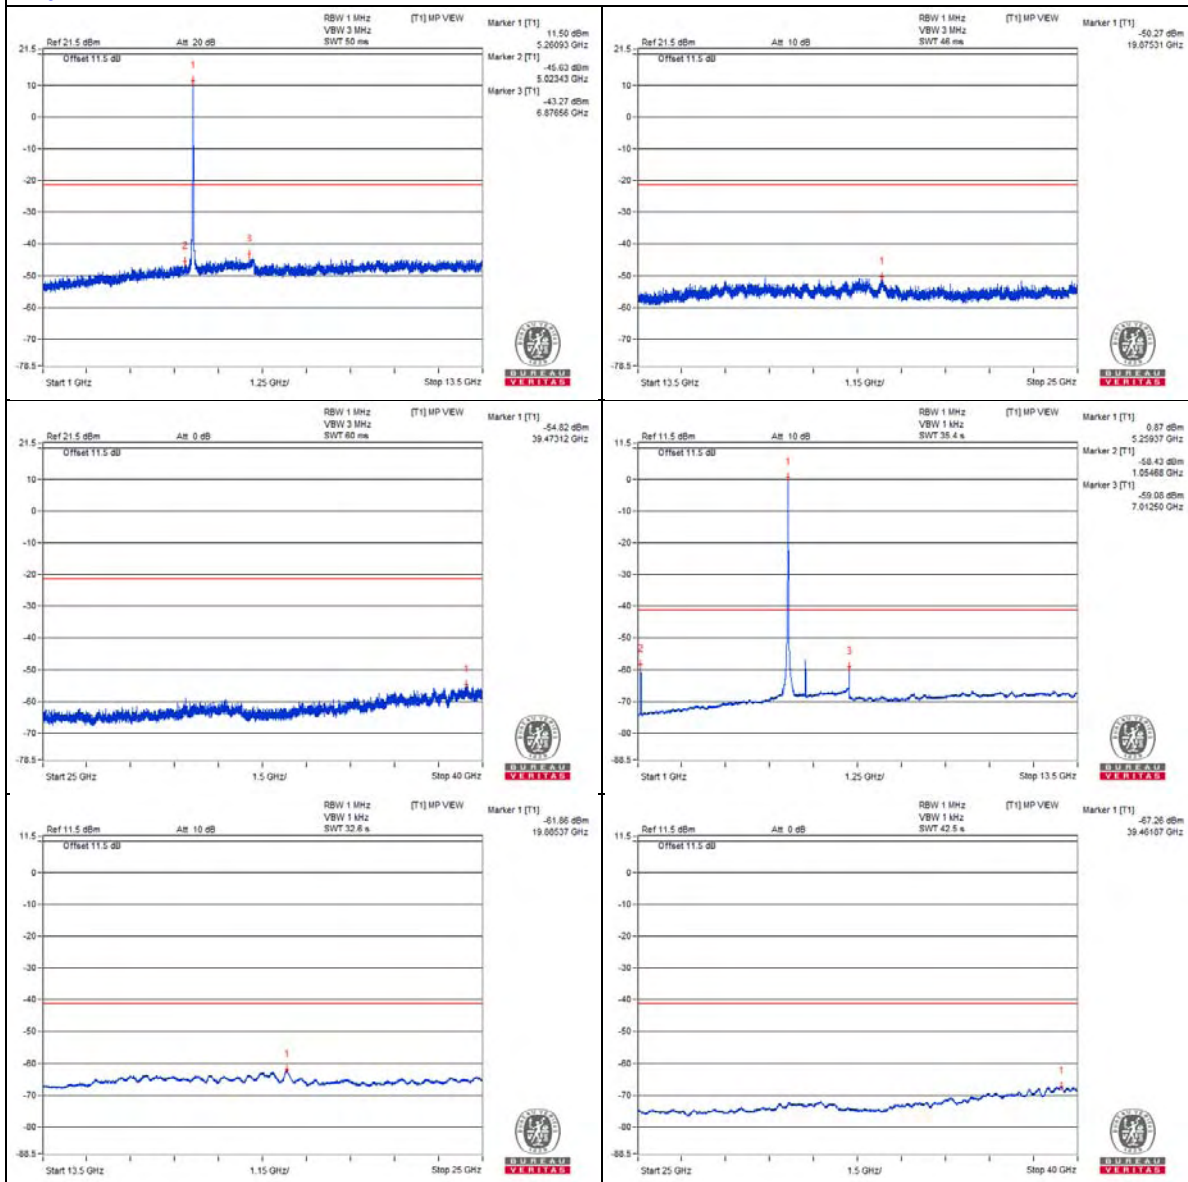

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5368.42 PK	60.12	74	-13.88	-45.52	-43.81	6.43	-35.14
2	5350 AV	46.57	54	-7.43	-58	-58.27	6.43	-48.69

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

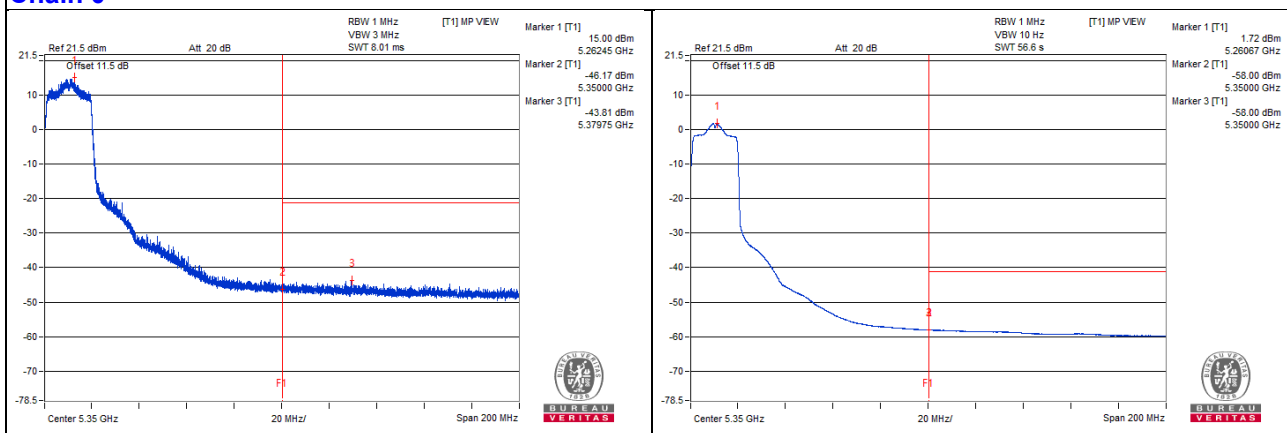

Chain 1

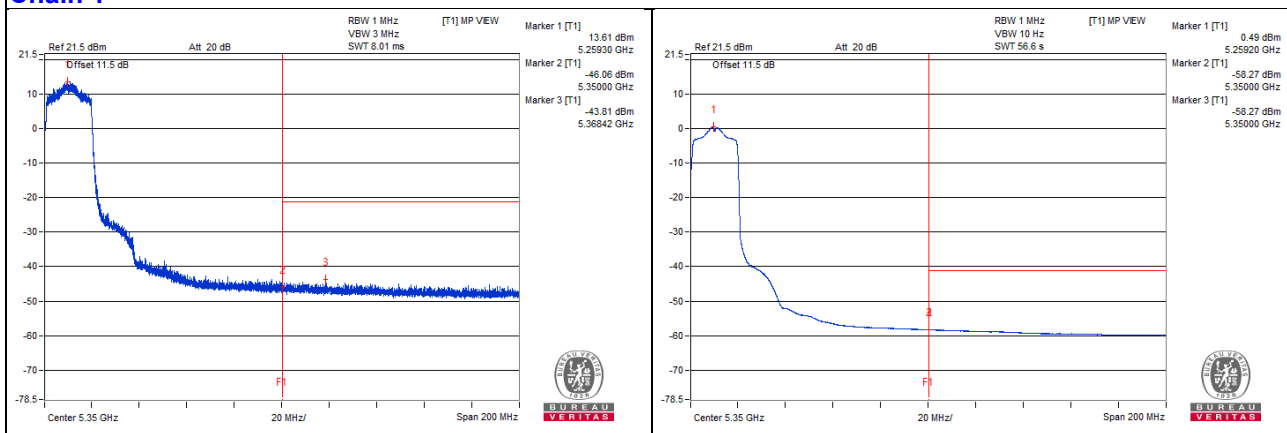

802.11ax (HE20) - Channel 60


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3543.75 PK	57.71	74	-16.29	-50.68	-47.39	8.17	-37.55
2	3546.87 AV	35.71	54	-18.29	-70.5	-70.97	8.17	-59.55
3	7065.62 PK	59.36	68.2	-8.84	-47.99	-46.33	8.17	-35.9
4	10617.18 PK	60.52	74	-13.48	-45.1	-46.92	8.17	-34.74
5	10601.56 AV	39.01	54	-14.99	-67.49	-67.38	8.17	-56.25
6	15900.62 PK	53.05	74	-20.95	-53.12	-53.68	8.17	-42.21
7	15884.81 AV	42.01	54	-11.99	-64.37	-64.49	8.17	-53.25


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

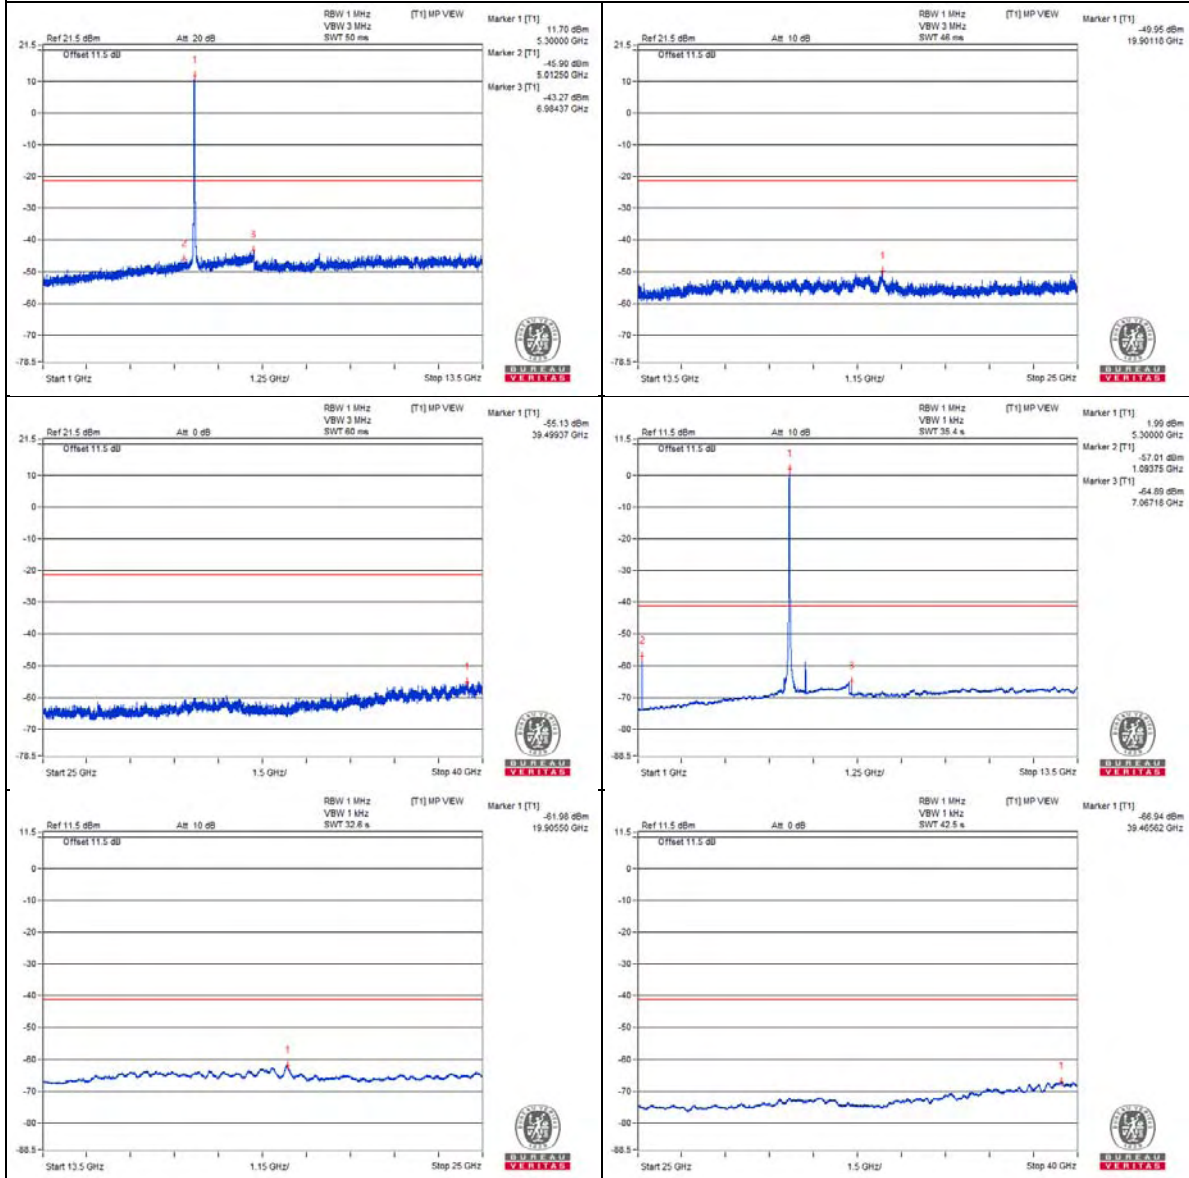

Chain 1

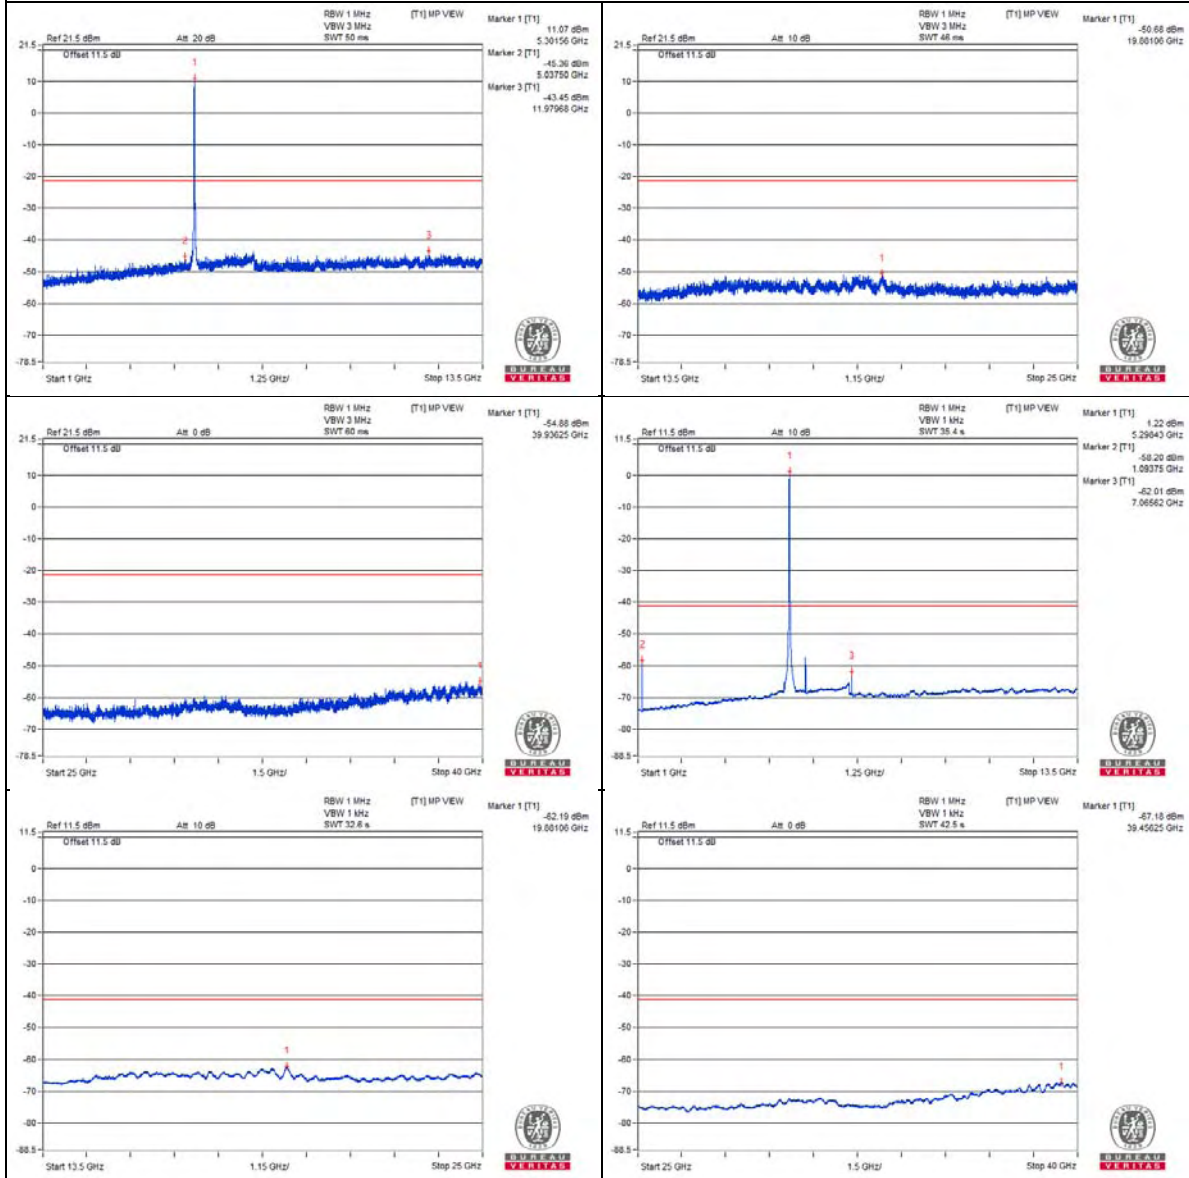

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.45 PK	62.96	74	-11.04	-40.72	-43.08	6.43	-32.3
2	5350.22 AV	48.85	54	-5.15	-55.81	-55.89	6.43	-46.41

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

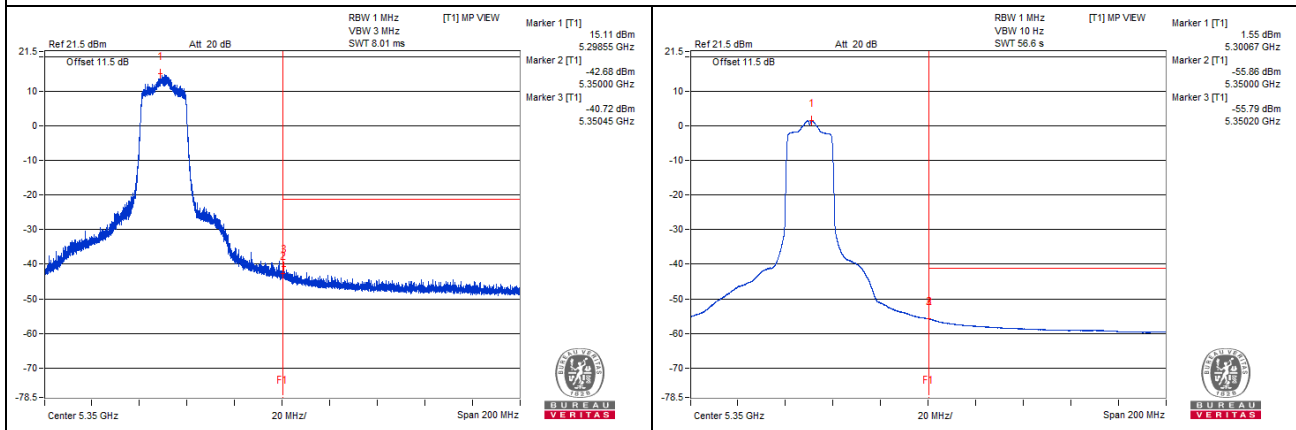

Chain 1

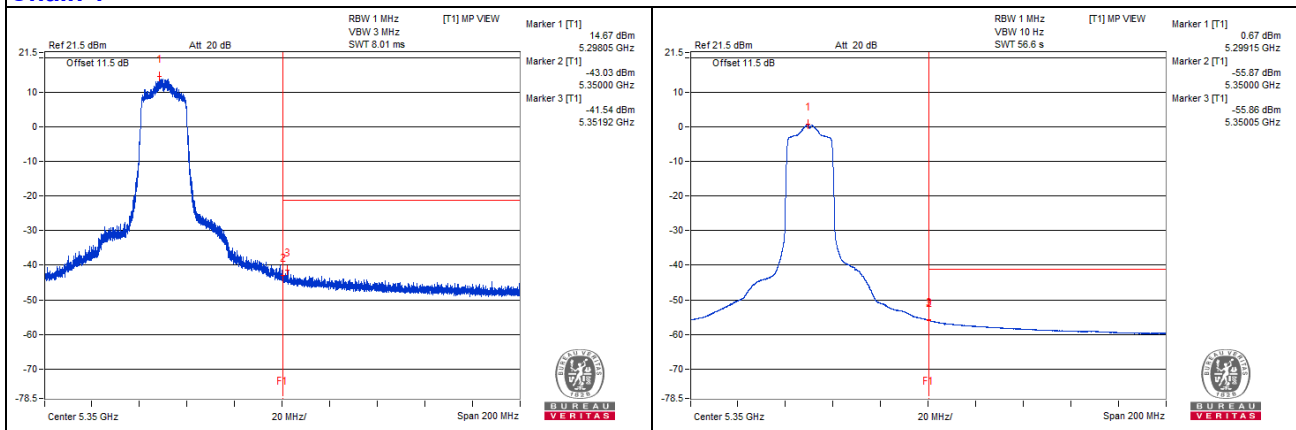

802.11ax (HE20) - Channel 64


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3528.12 PK	57.12	74	-16.88	-50.75	-48.24	8.17	-38.14
2	3534.37 AV	35.79	54	-18.21	-70.53	-70.77	8.17	-59.47
3	7106.25 PK	59.39	68.2	-8.81	-46.7	-47.44	8.17	-35.87
4	10626.56 PK	60.35	74	-13.65	-46.51	-45.71	8.17	-34.91
5	10635.93 AV	38.83	54	-15.17	-67.59	-67.63	8.17	-56.43
6	15961 PK	51.85	74	-22.15	-54.52	-54.66	8.17	-43.41
7	15965.31 AV	41.07	54	-12.93	-65.26	-65.48	8.17	-54.19


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

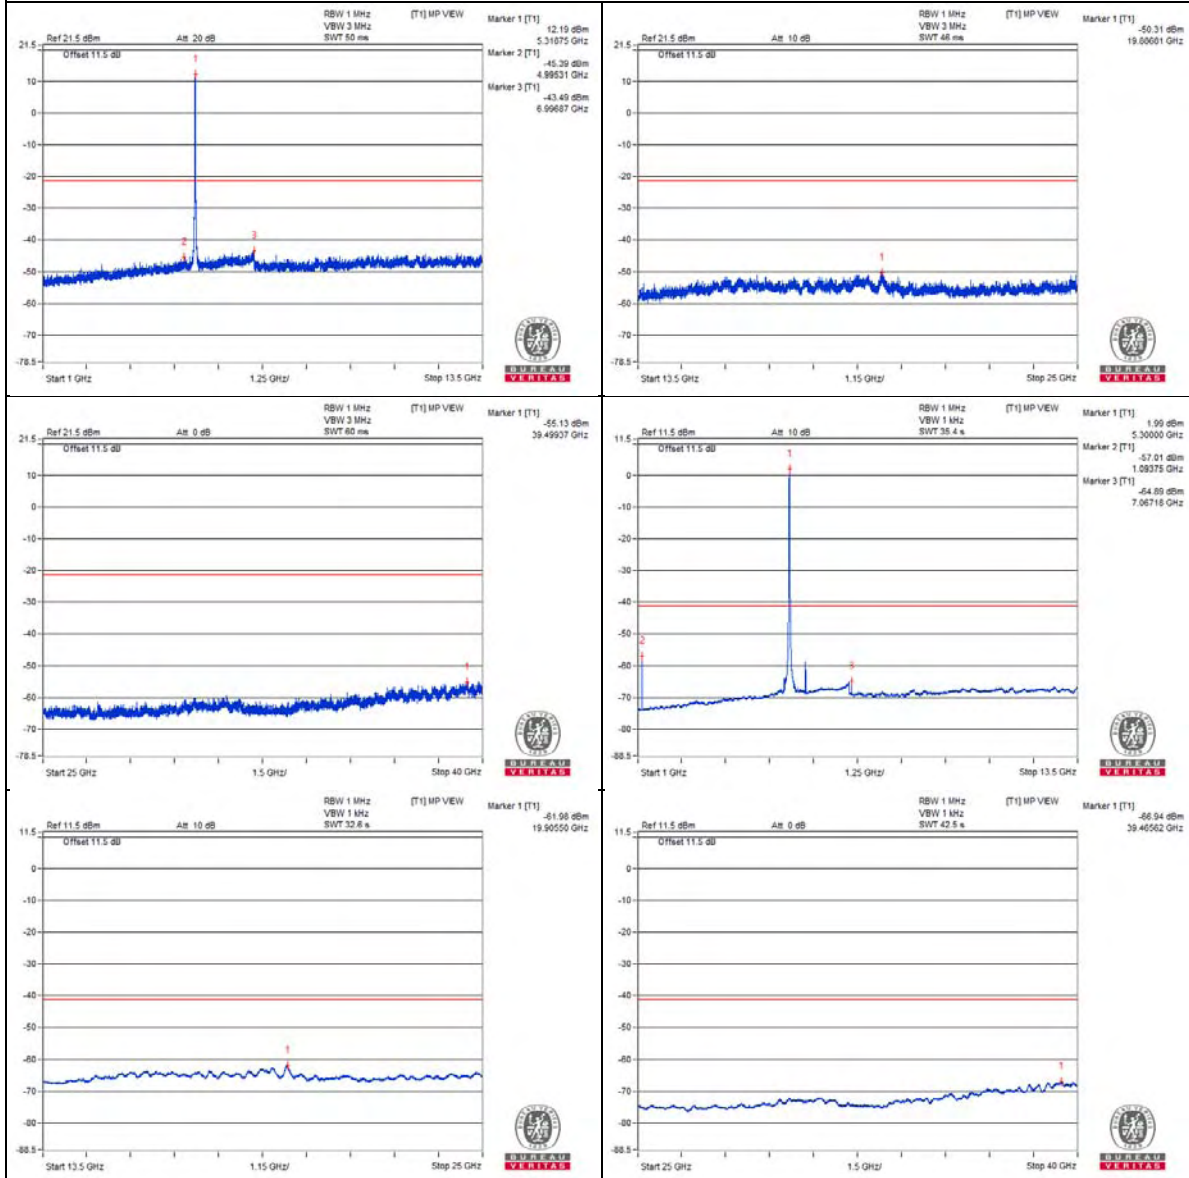

Chain 1

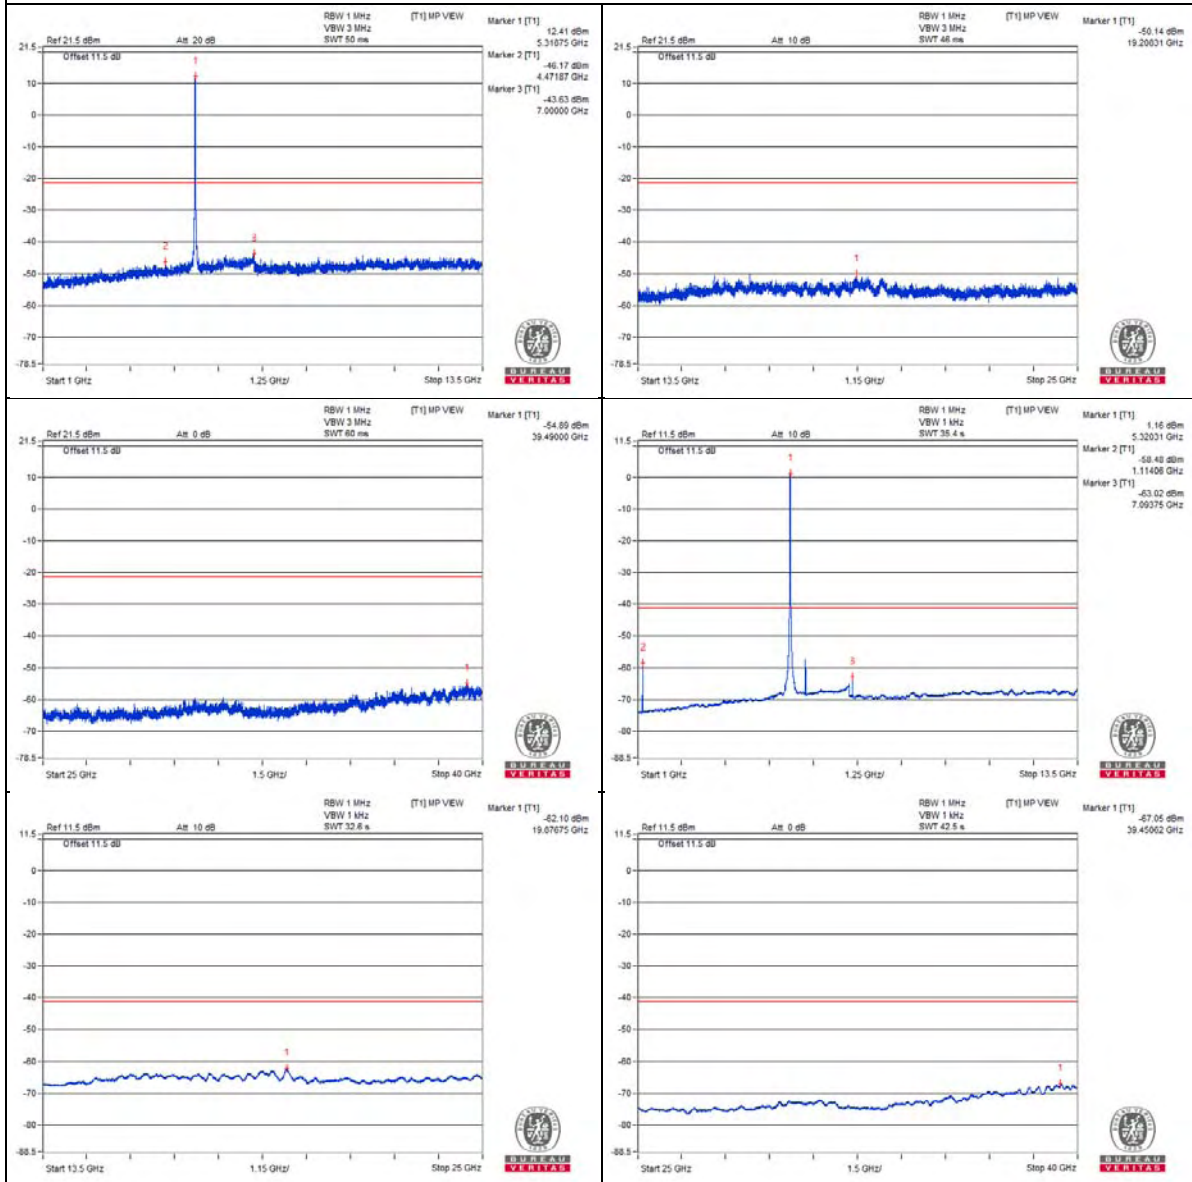

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5353.4 PK	68.16	74	-5.84	-35.14	-38.61	6.43	-27.1
2	5350.05 AV	54.16	54	*0.16	-50.78	-50.32	6.43	-41.1


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

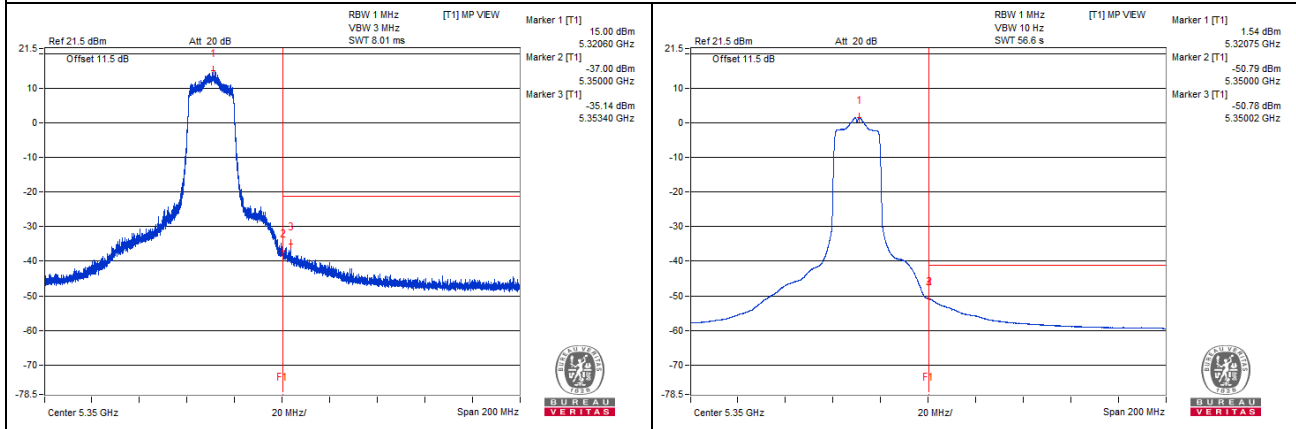

Chain 1

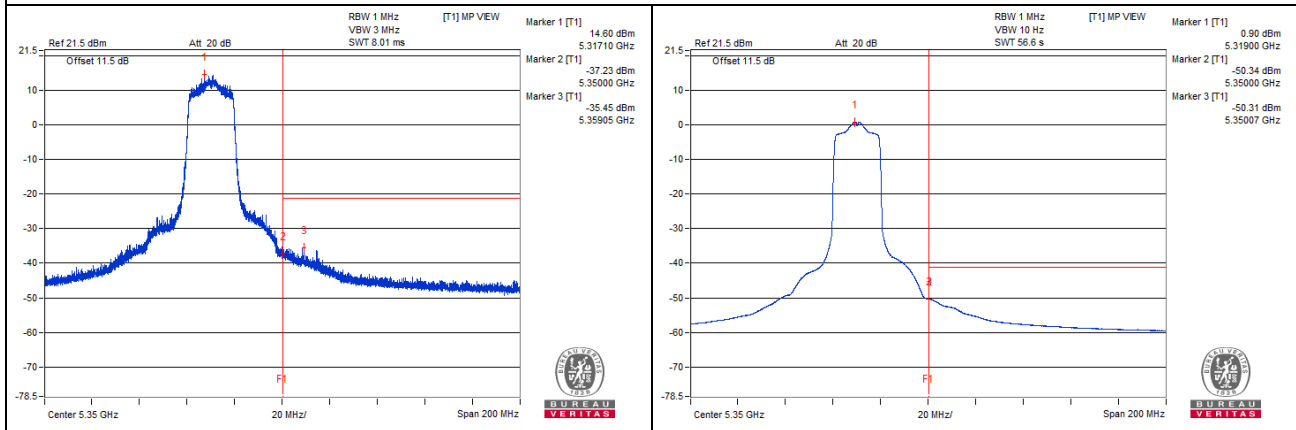

802.11ax (HE20) - Channel 100


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3651.56 PK	57.14	74	-16.86	-49.69	-48.94	8.17	-38.12
2	3684.37 AV	35.67	54	-18.33	-70.69	-70.86	8.17	-59.59
3	7317.18 PK	59.6	74	-14.4	-46.46	-47.26	8.17	-35.66
4	7325 AV	37.77	54	-16.23	-68.56	-68.78	8.17	-57.49
5	11017.18 PK	60.37	74	-13.63	-45.86	-46.29	8.17	-34.89
6	11003.12 AV	38.92	54	-15.08	-67.7	-67.34	8.17	-56.34
7	16514.43 PK	52.73	68.2	-15.47	-54.98	-52.73	8.17	-42.53


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

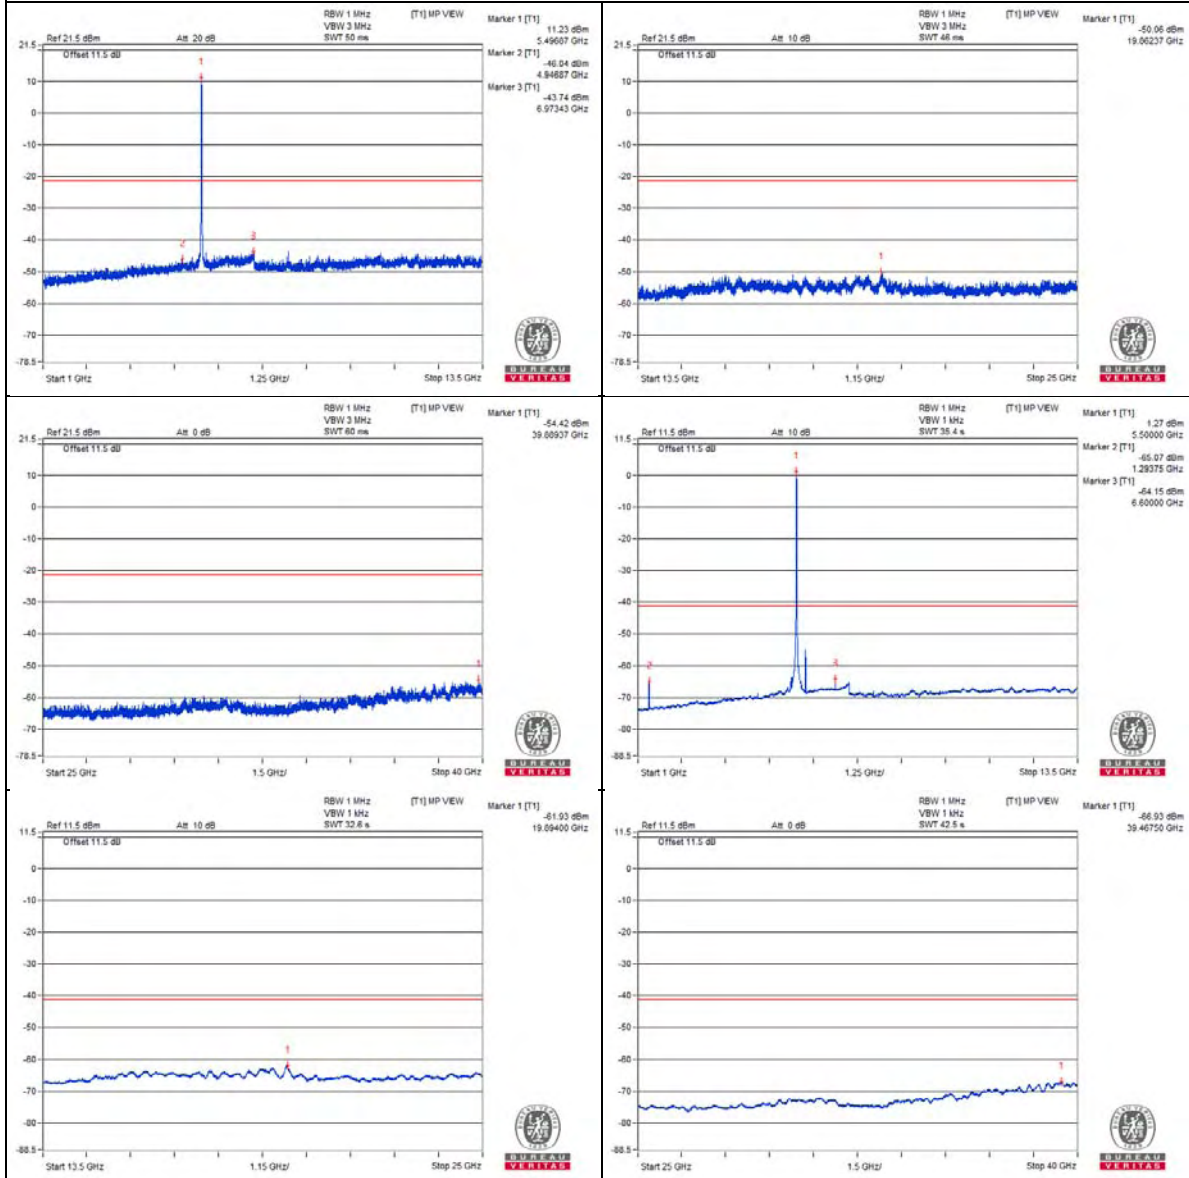

Chain 1

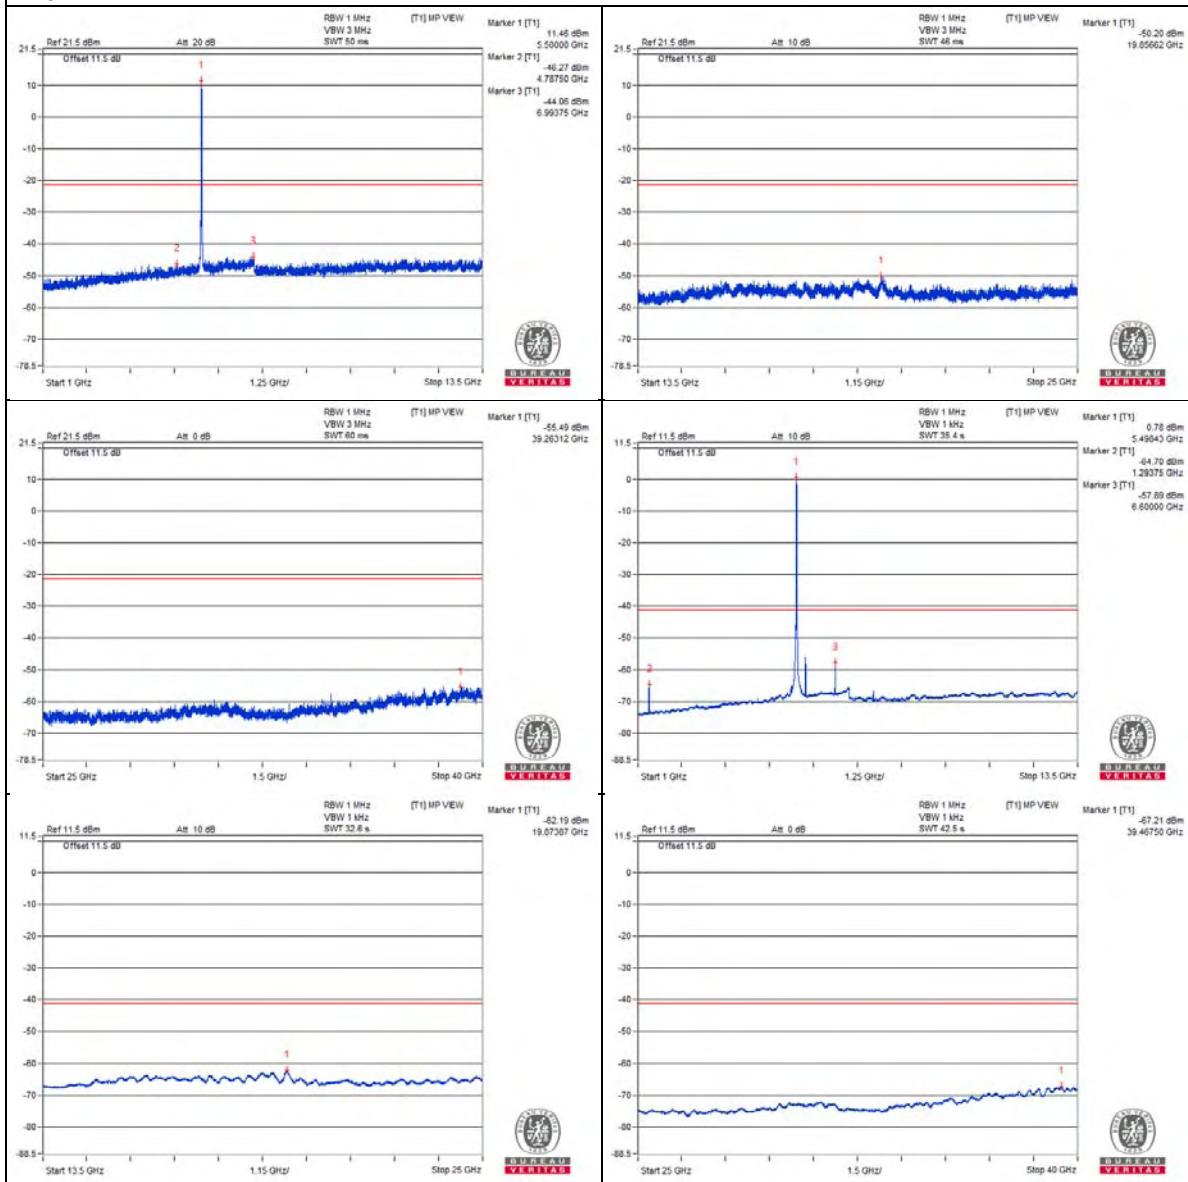

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5459.9 PK	64.85	74	-9.15	-43.51	-39.76	7.82	-30.41
2	5459.96 AV	50.84	54	-3.16	-55.48	-55.03	7.82	-44.42
3	5469.93 PK	70.38	68.2	*2.18	-39.74	-33.66	7.82	-24.88


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

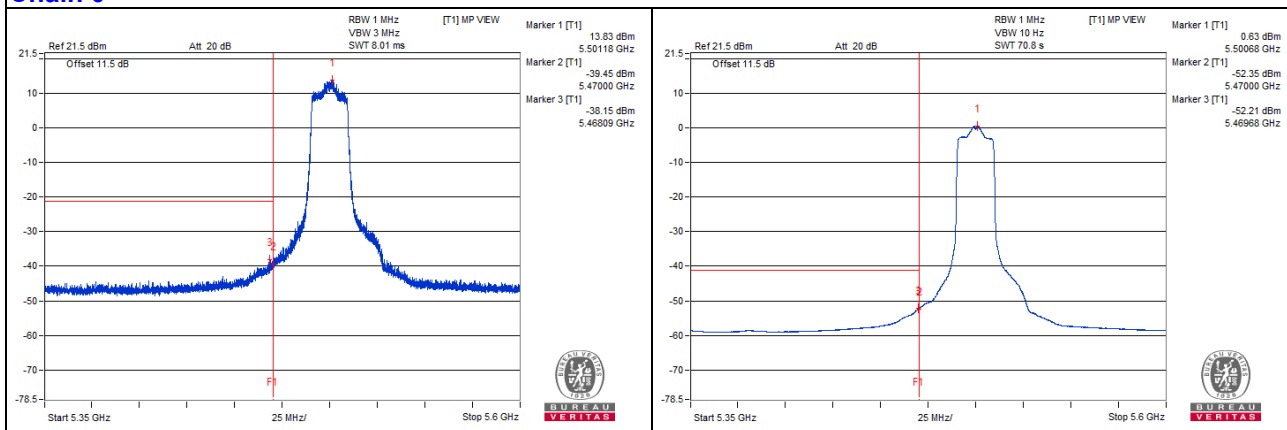

Chain 1

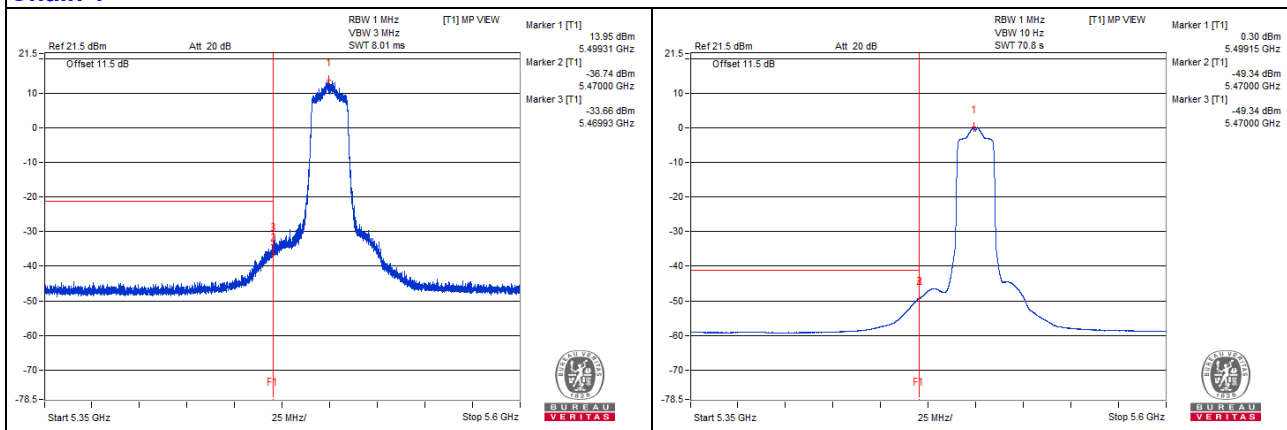

802.11ax (HE20) - Channel 116


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3717.18 PK	57.9	74	-16.1	-47.5	-49.9	8.17	-37.36
2	3737.5 AV	35.9	54	-18.1	-70.52	-70.57	8.17	-59.36
3	7432.81 PK	58.82	74	-15.18	-47.68	-47.56	8.17	-36.44
4	7426.56 AV	37.44	54	-16.56	-68.73	-69.28	8.17	-57.82
5	11143.75 PK	60.16	74	-13.84	-47.77	-45.17	8.17	-35.1
6	11162.5 AV	38.91	54	-15.09	-67.71	-67.36	8.17	-56.35
7	16735.81 PK	52.74	68.2	-15.46	-54.32	-53.15	8.17	-42.52


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

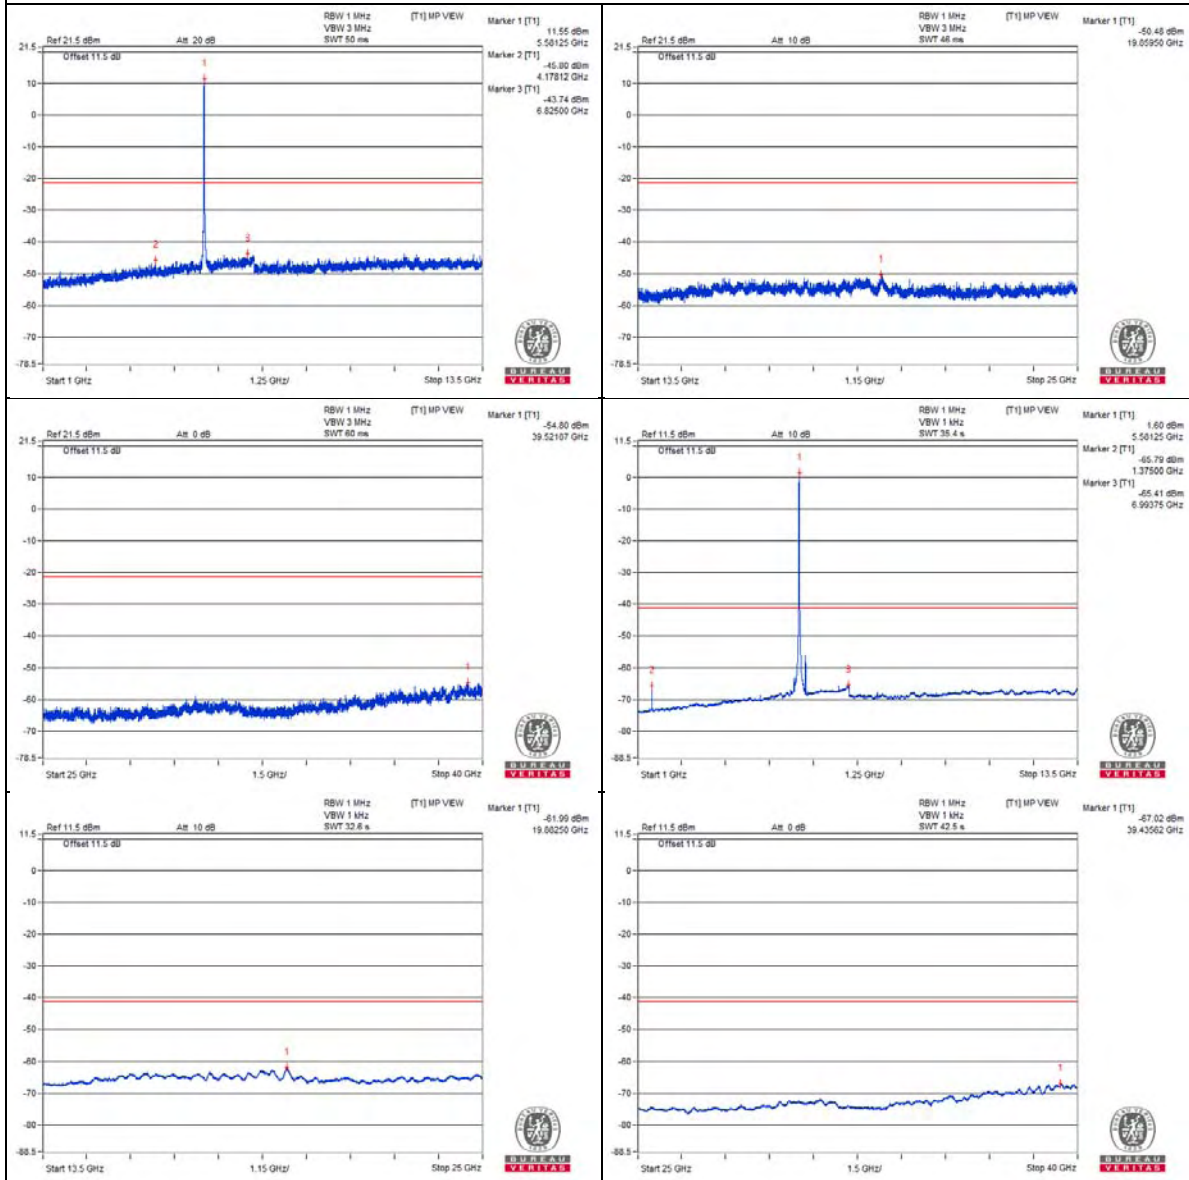

Chain 1

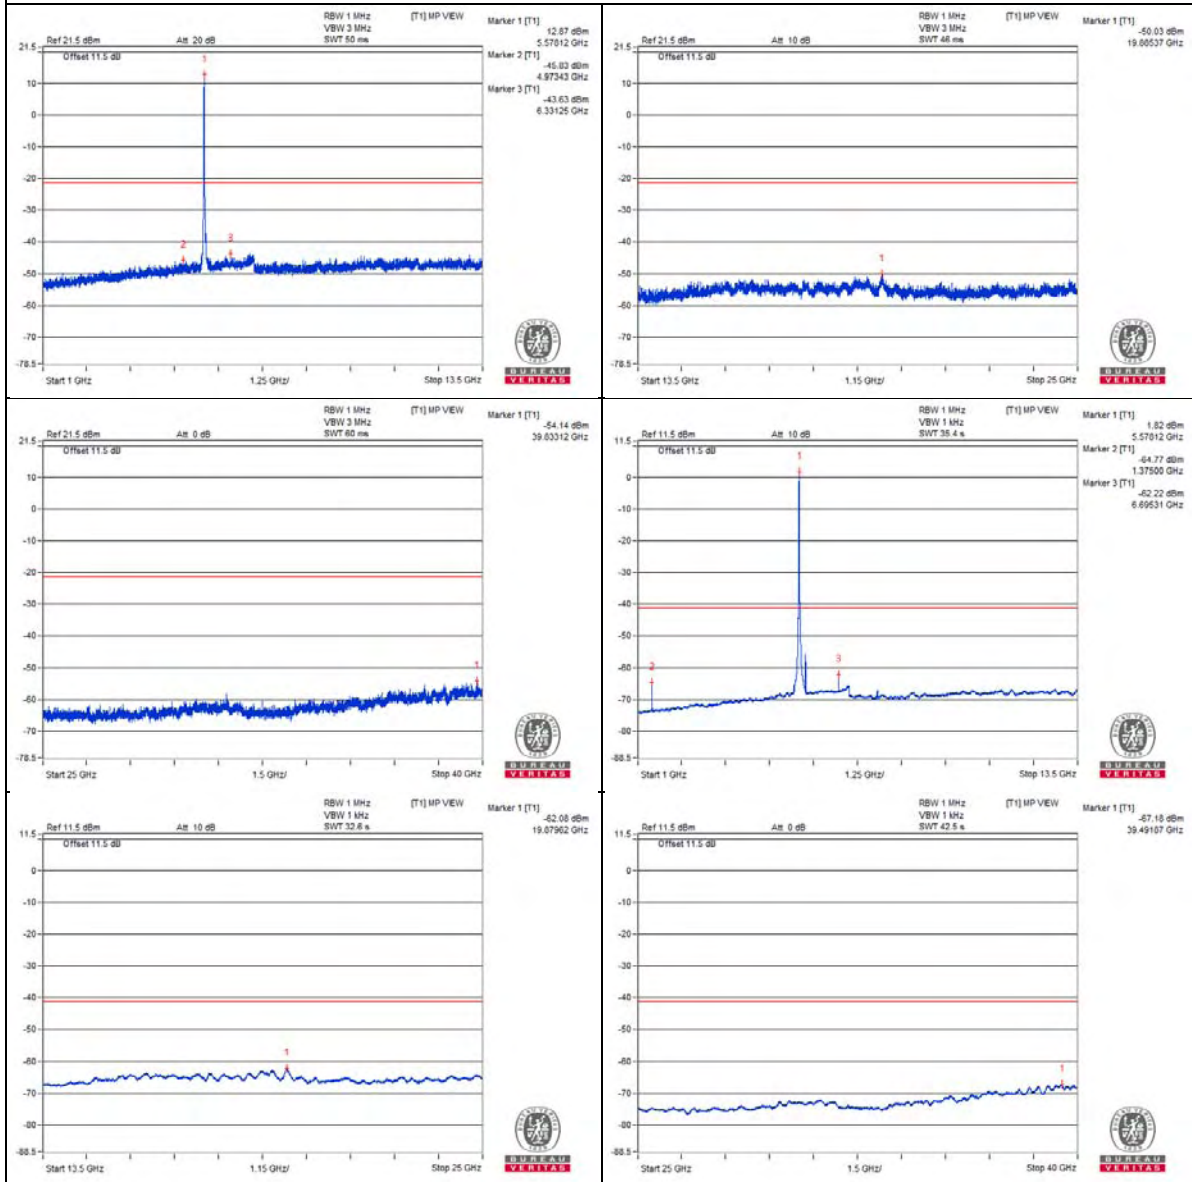

Bandedge table



No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5360.65 PK	60.72	74	-13.28	-44.73	-46.12	7.82	-34.54
2	5425.78 AV	47.12	54	-6.88	-58.68	-59.29	7.82	-48.14
3	5460.96 PK	60.4	68.2	-7.8	-46.5	-45	7.82	-34.86

Note :



Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

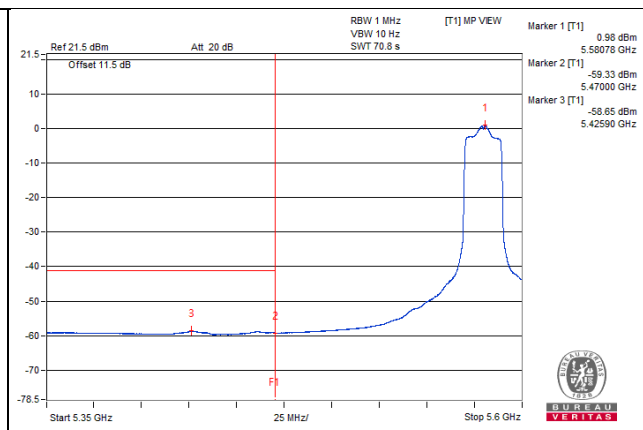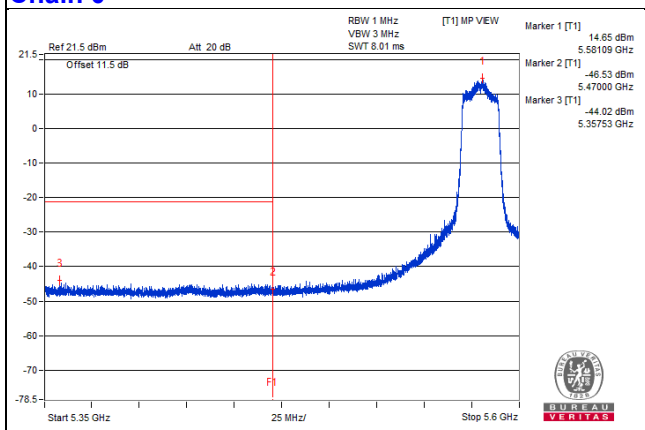

Chain 1

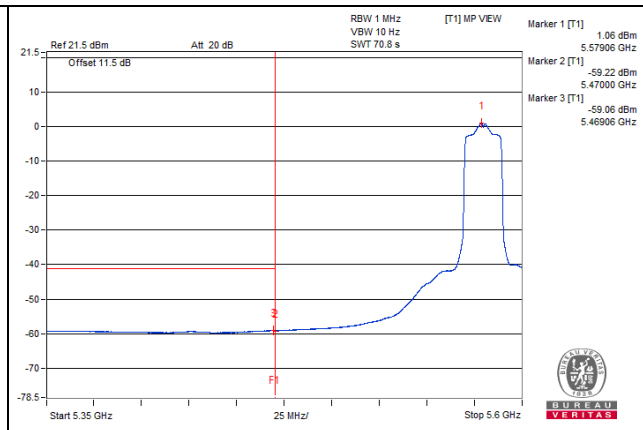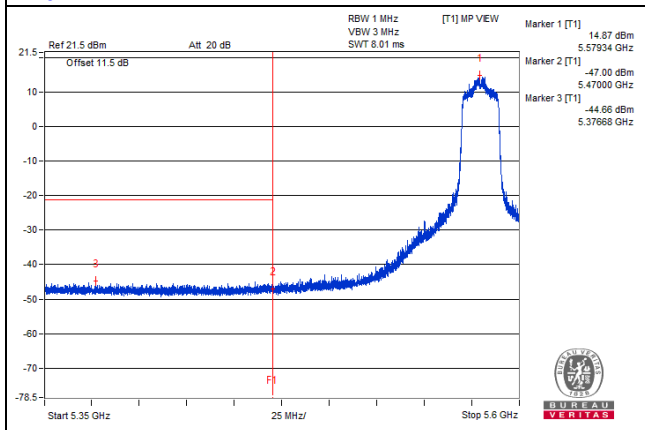

802.11ax (HE20) - Channel 140


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3806.25 PK	58.08	74	-15.92	-47.05	-50.25	8.17	-37.18
2	3806.25 AV	36.06	54	-17.94	-70.35	-70.42	8.17	-59.2
3	7614.06 PK	59.29	74	-14.71	-48.48	-46.14	8.17	-35.97
4	7585.93 AV	37.52	54	-16.48	-68.92	-68.92	8.17	-57.74
5	11392.18 PK	60.41	74	-13.59	-46.8	-45.38	8.17	-34.85
6	11401.56 AV	39.29	54	-14.71	-67.71	-66.65	8.17	-55.97
7	17088 PK	52.79	68.2	-15.41	-52.56	-55.11	8.17	-42.47


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

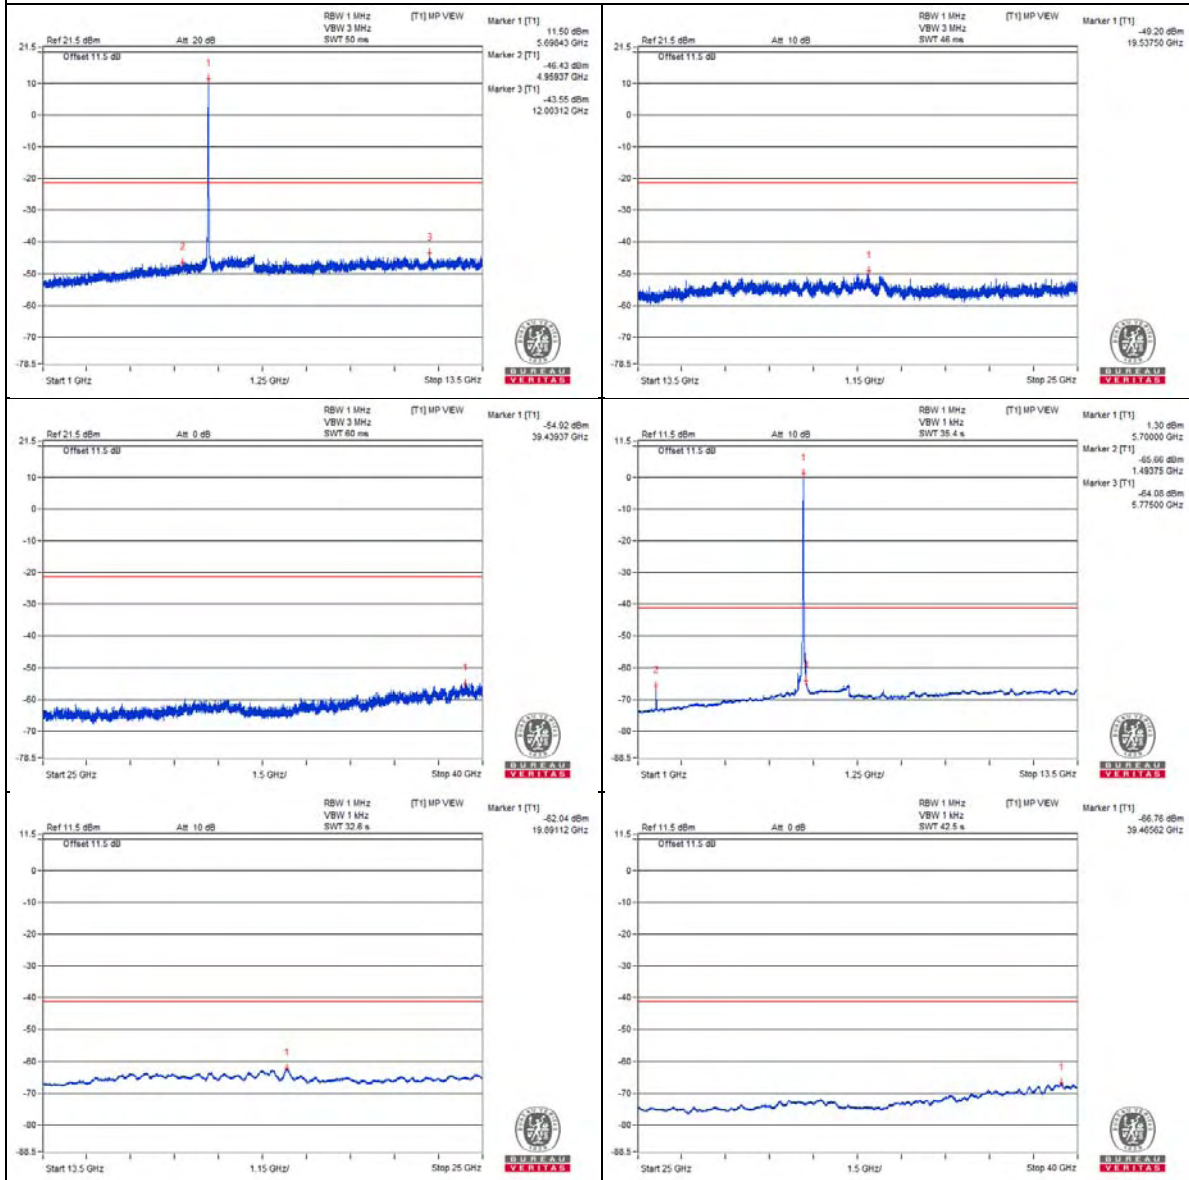

Chain 1

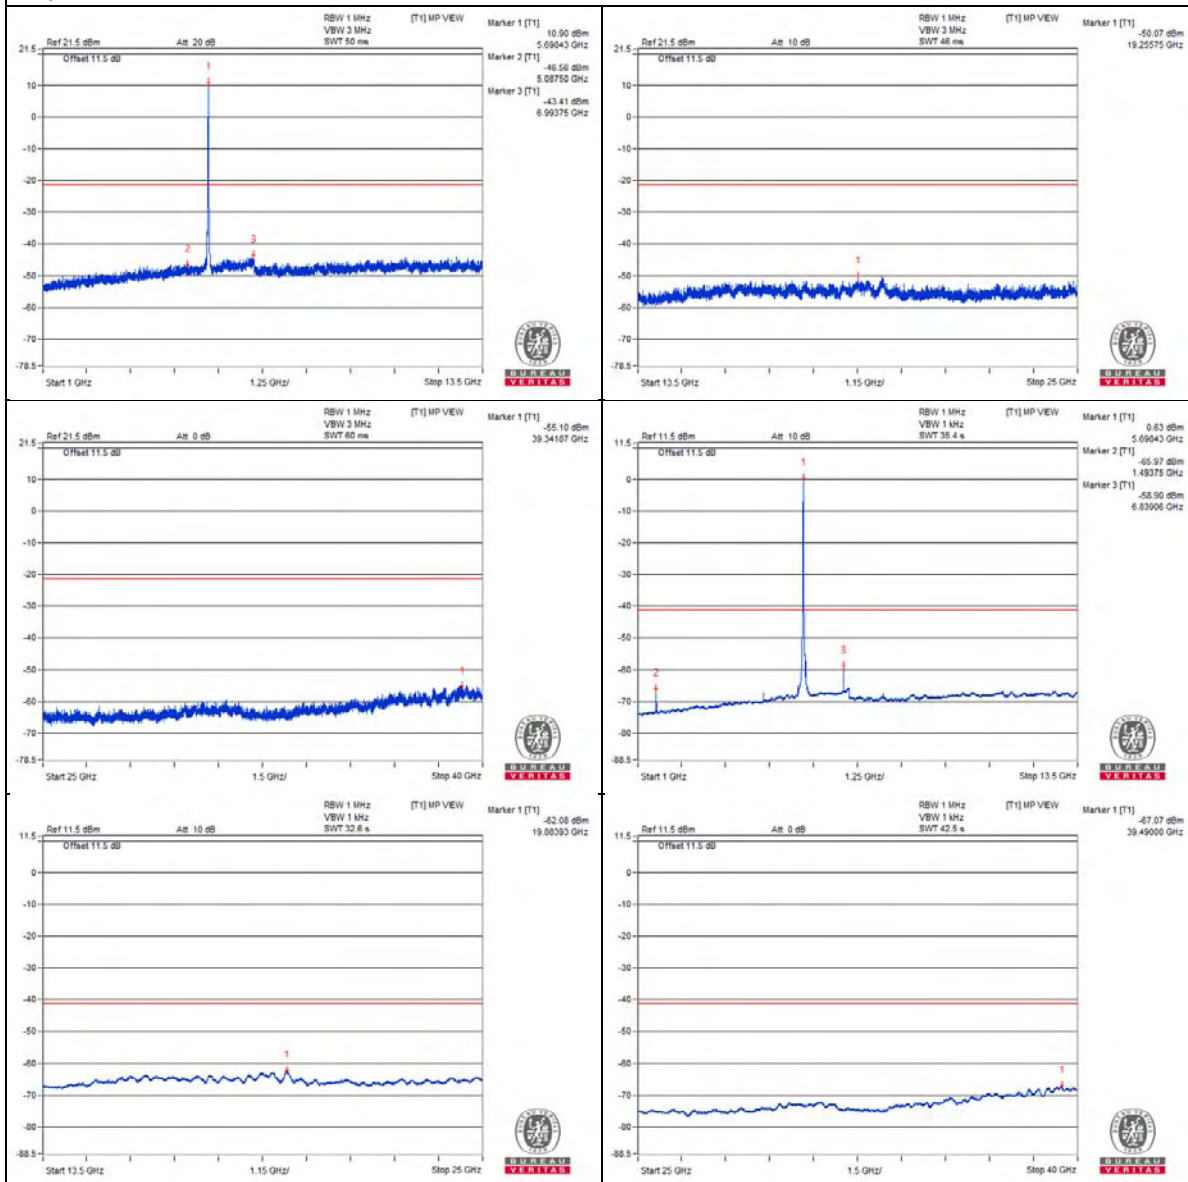

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5725.02 PK	72.96	68.2	*4.76	-33.09	-33.17	7.82	-22.3

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

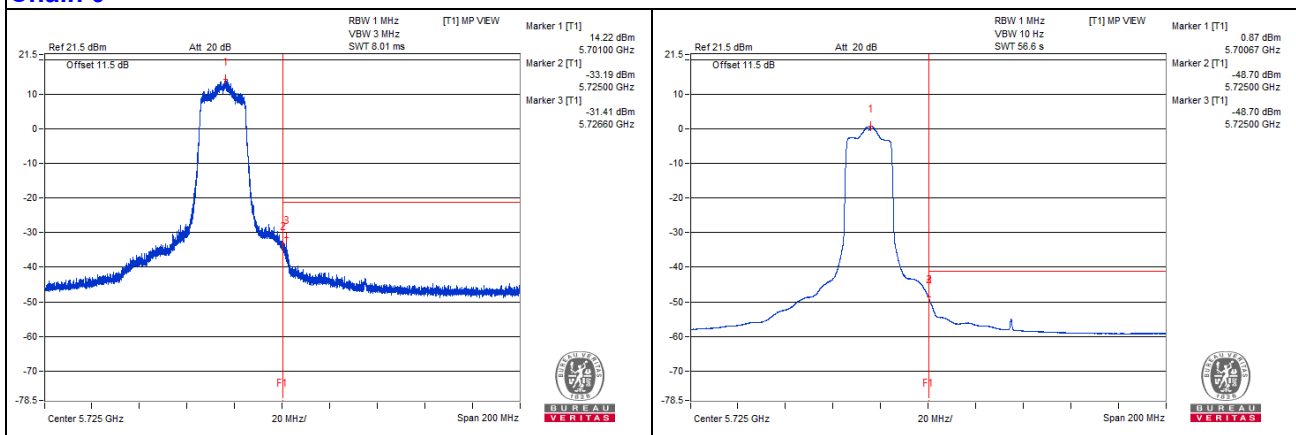

Chain 1

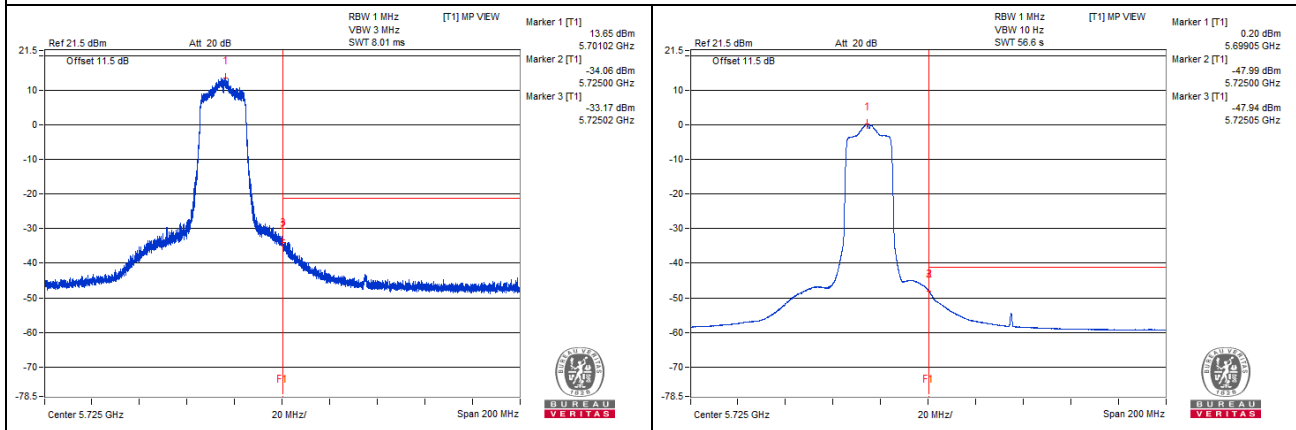

802.11ax (HE20) - Channel 144


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3812.5 PK	57.36	74	-16.64	-48.24	-50.13	8.17	-37.9
2	3832.81 AV	36.04	54	-17.96	-70.26	-70.54	8.17	-59.22
3	7625 PK	59.04	74	-14.96	-46.91	-47.95	8.17	-36.22
4	7609.37 AV	37.47	54	-16.53	-68.99	-68.95	8.17	-57.79
5	11425 PK	59.64	74	-14.36	-48.13	-45.78	8.17	-35.62
6	11439.06 AV	38.93	54	-15.07	-68.19	-66.92	8.17	-56.33
7	17165.62 PK	52.48	68.2	-15.72	-52.62	-55.91	8.17	-42.78


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

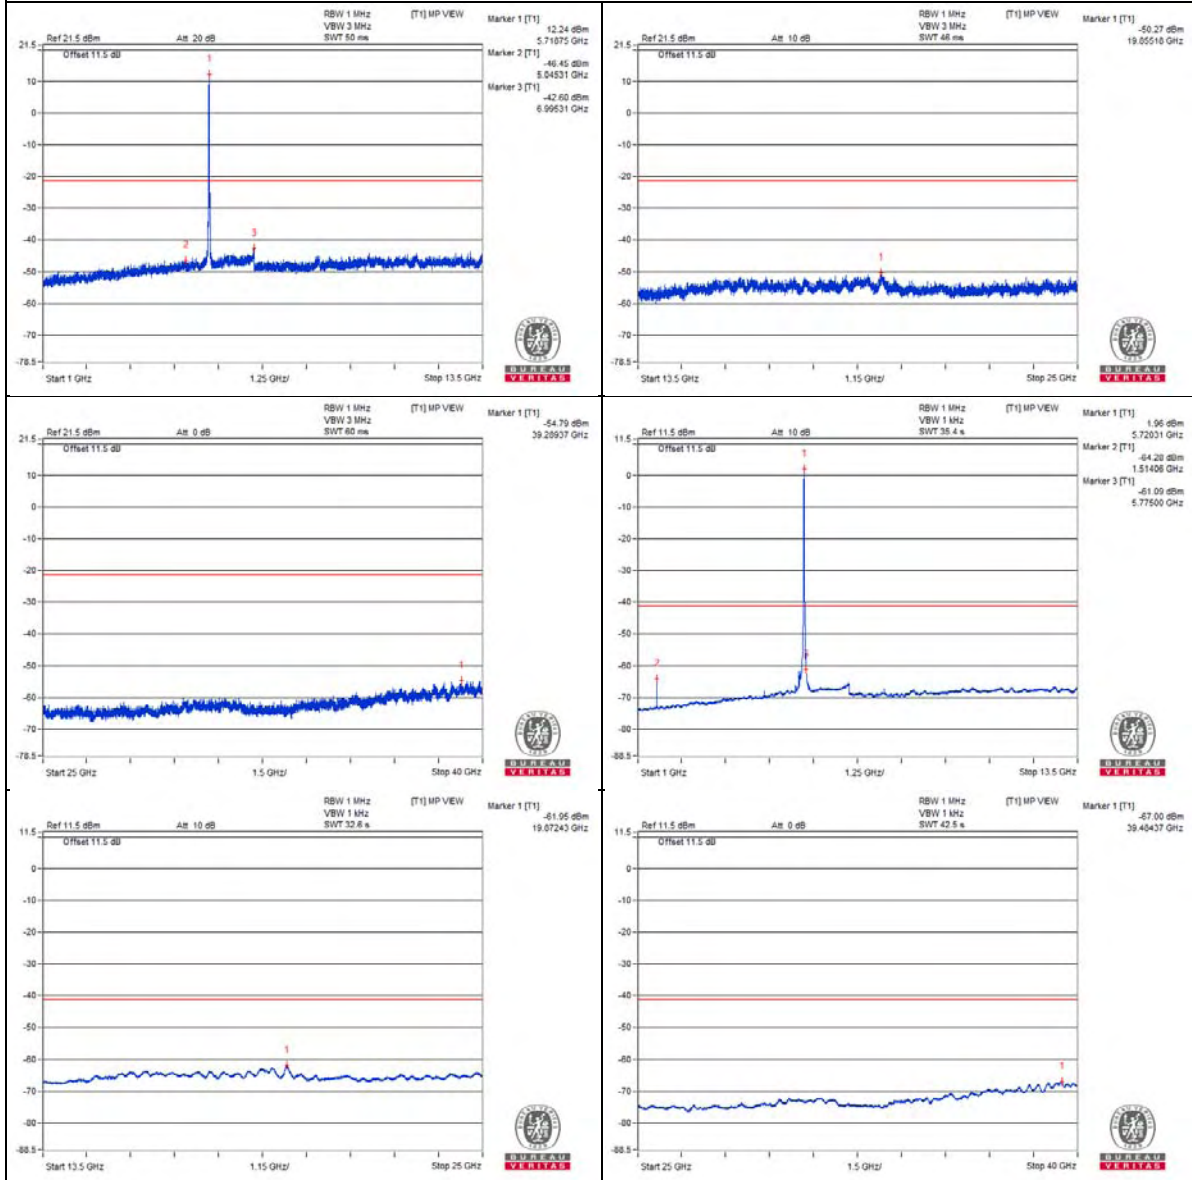

Chain 1

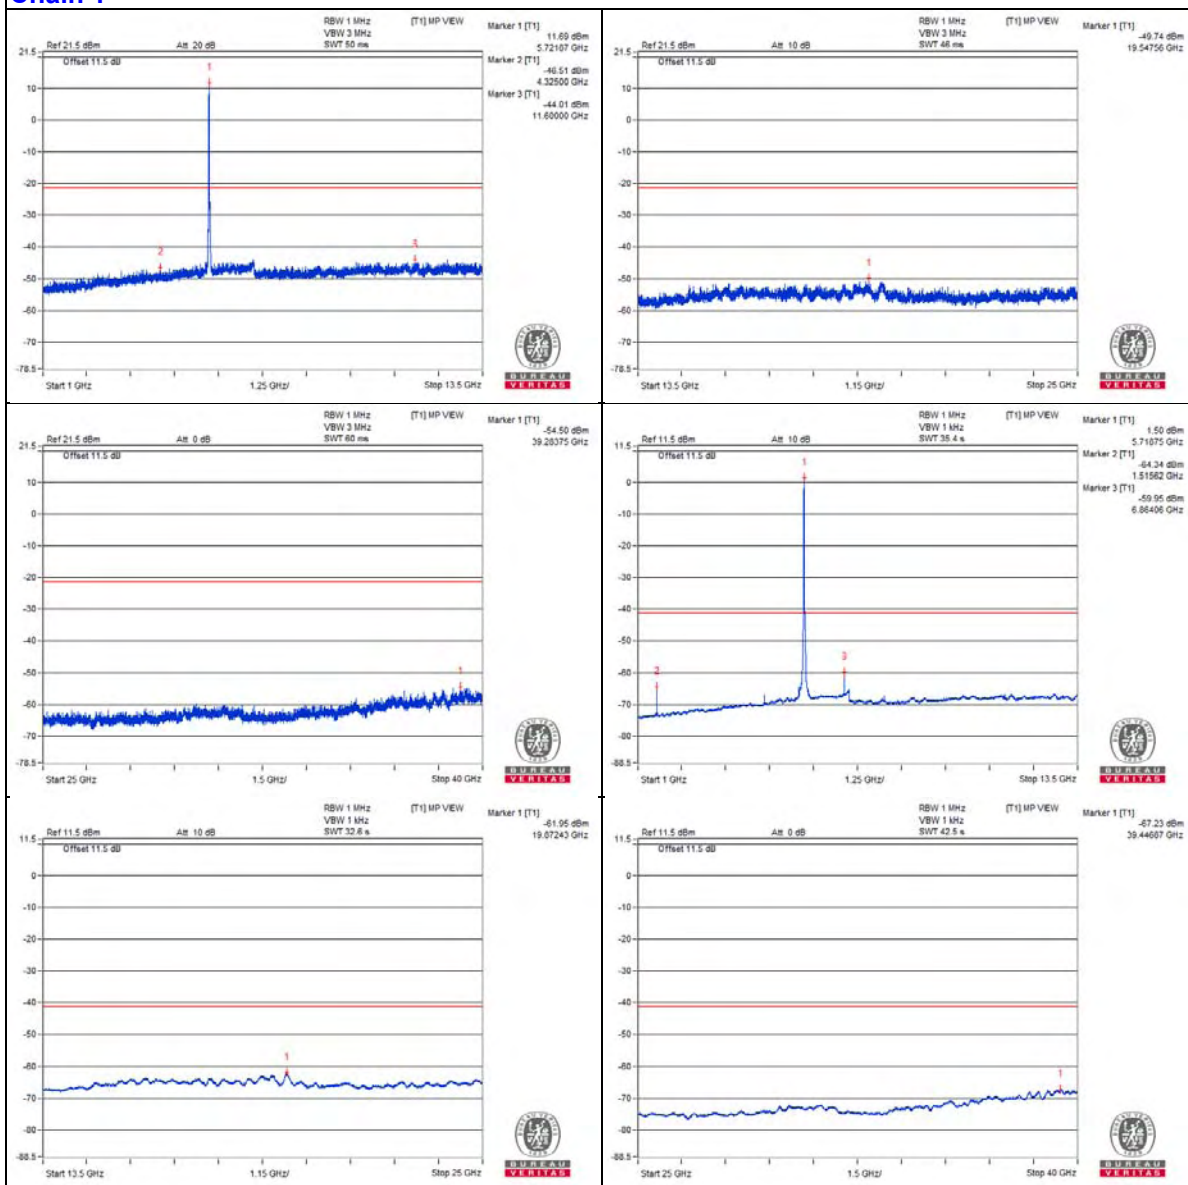

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5882.76 PK	60.64	68.2	-7.56	-44.67	-46.4	7.82	-34.62

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

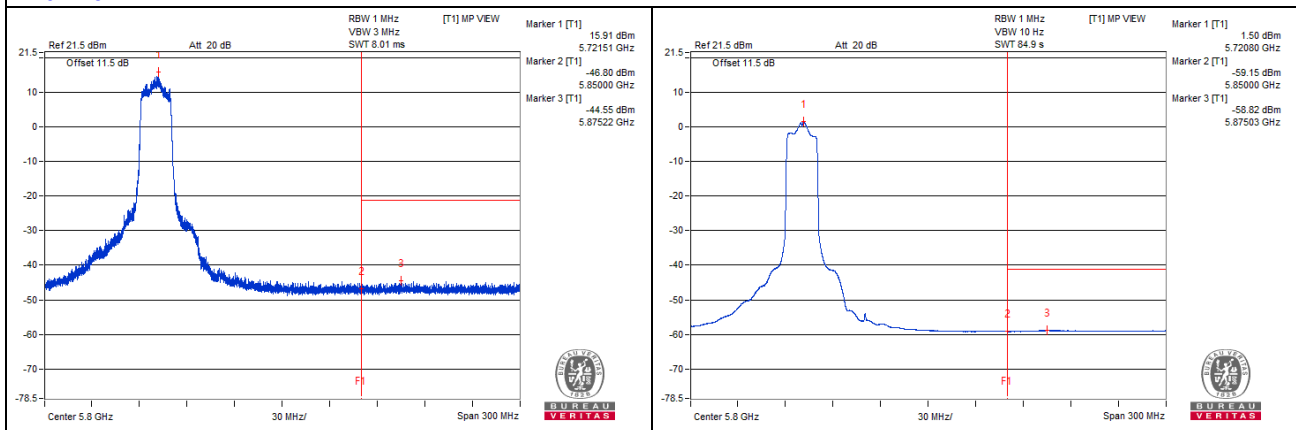

Chain 1

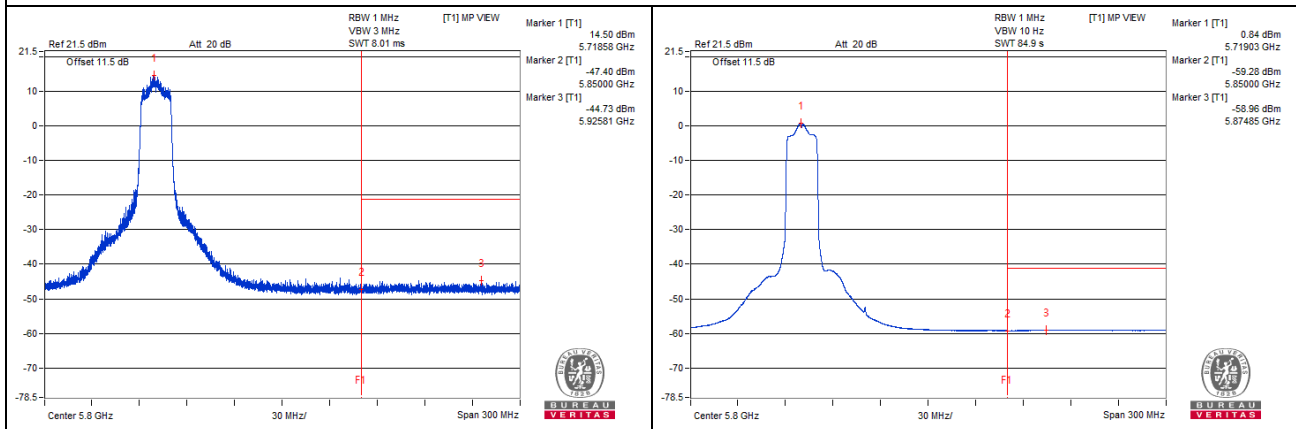

802.11ax (HE20) – Channel 149

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3823.43 PK	57.96	74	-16.04	-47.6	-49.59	8.17	-37.3
2	3826.56 AV	35.94	54	-18.06	-70.57	-70.43	8.17	-59.32
3	7657.81 PK	58.43	74	-15.57	-49.58	-46.86	8.17	-36.83
4	7640.62 AV	37.44	54	-16.56	-68.89	-69.11	8.17	-57.82
5	11478.12 PK	60.29	74	-13.71	-45.87	-46.45	8.17	-34.97
6	11490.62 AV	38.93	54	-15.07	-68.11	-66.98	8.17	-56.33
7	17244.68 PK	53.04	68.2	-15.16	-53.33	-53.48	8.17	-42.22


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

2. # : Non-restricted frequency, no limit for average emission.

Chain 0

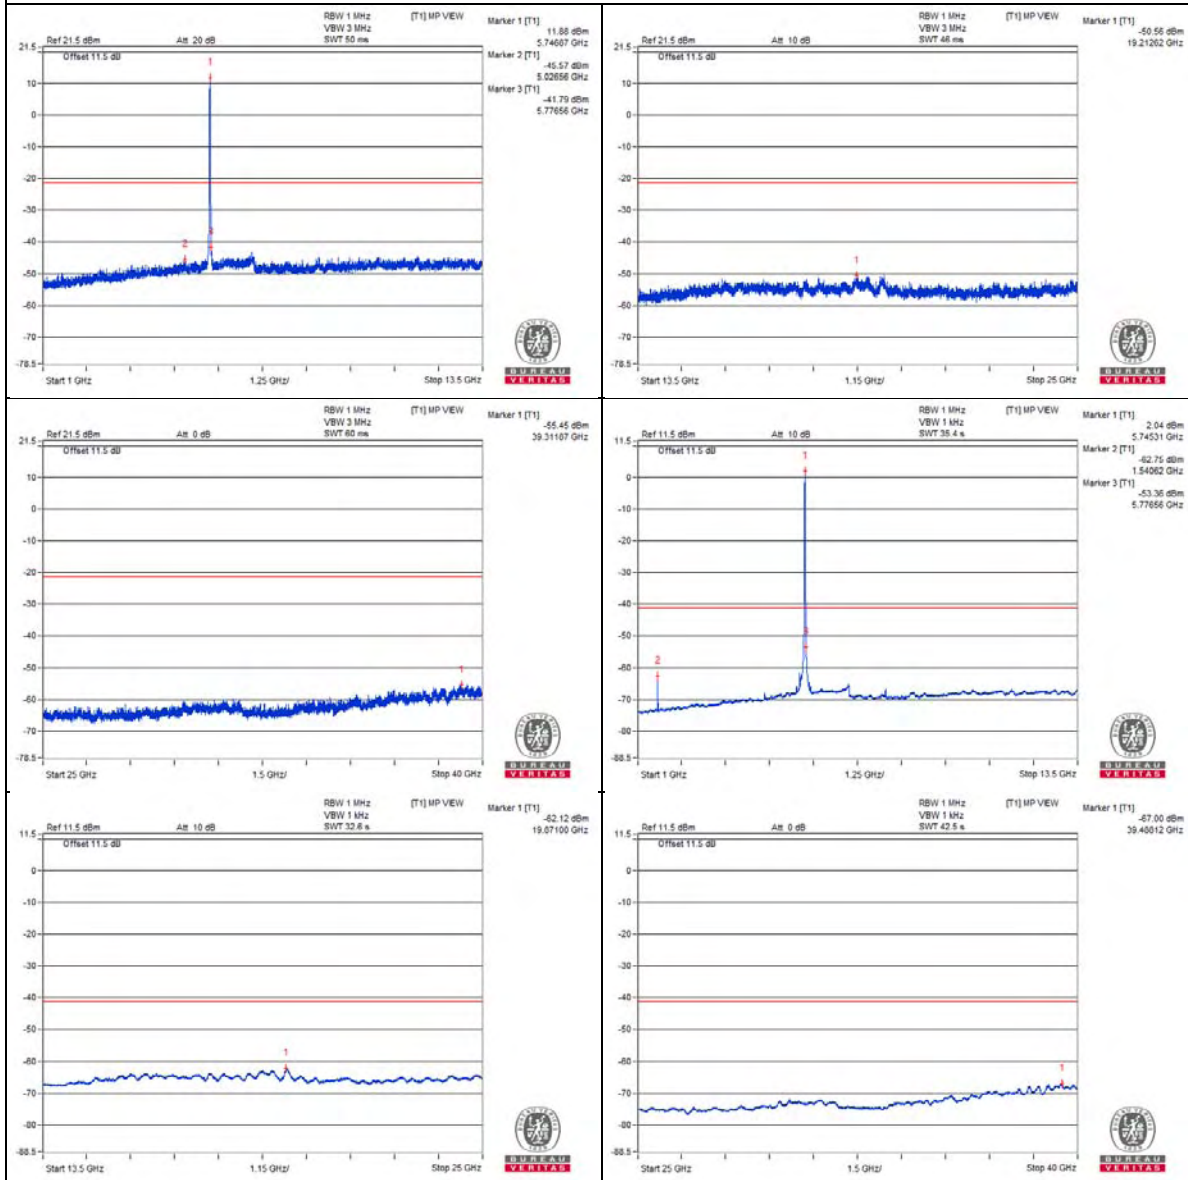


Chain 1

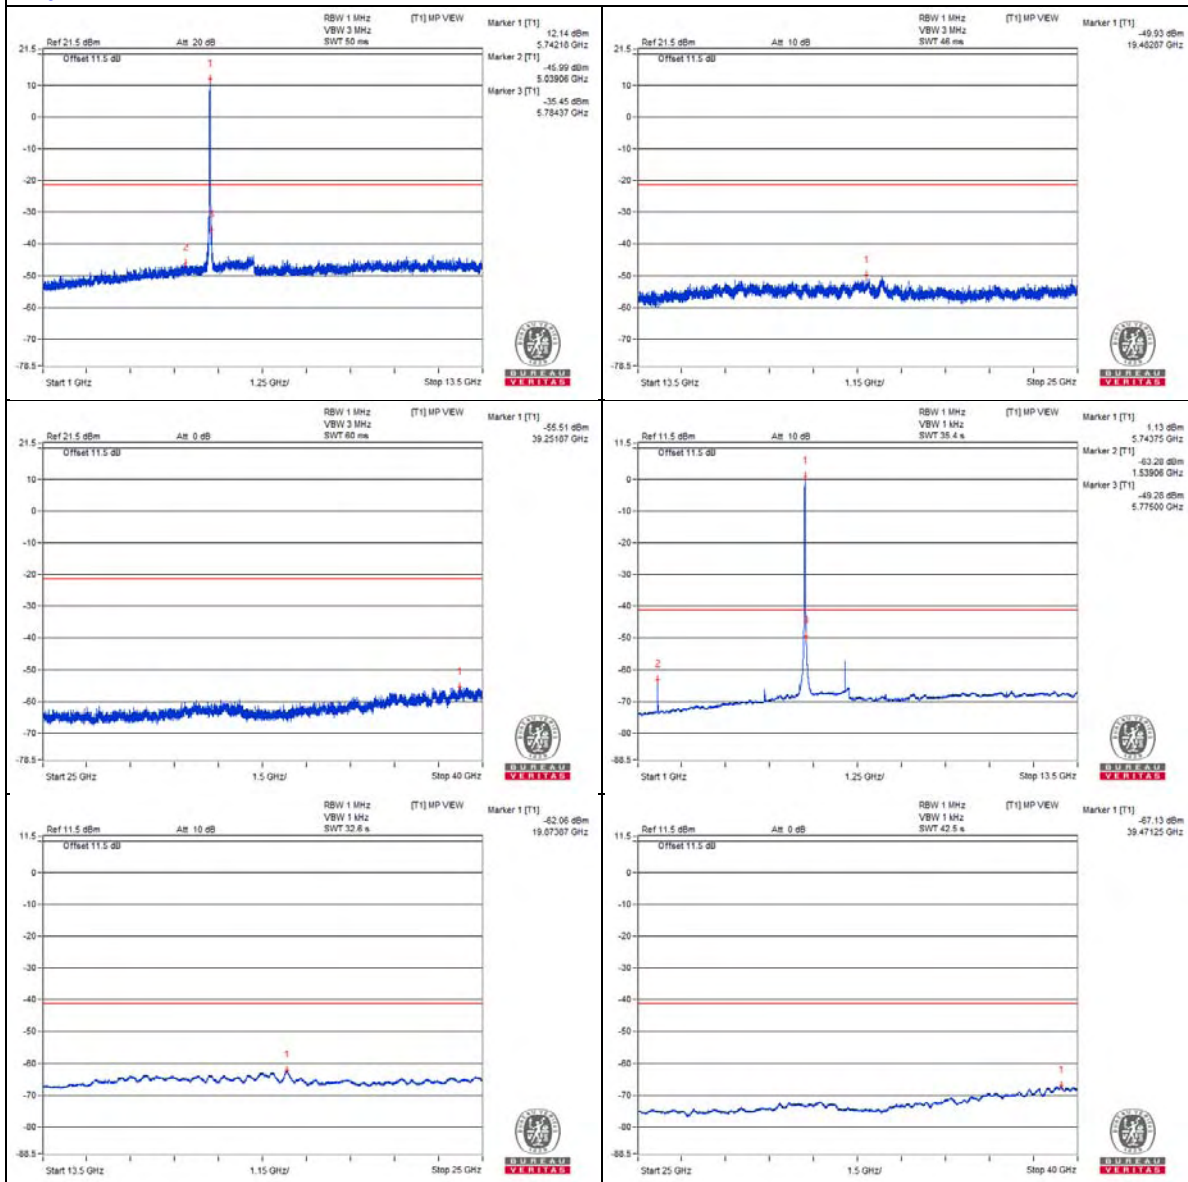


Bandedge table

Chain 0

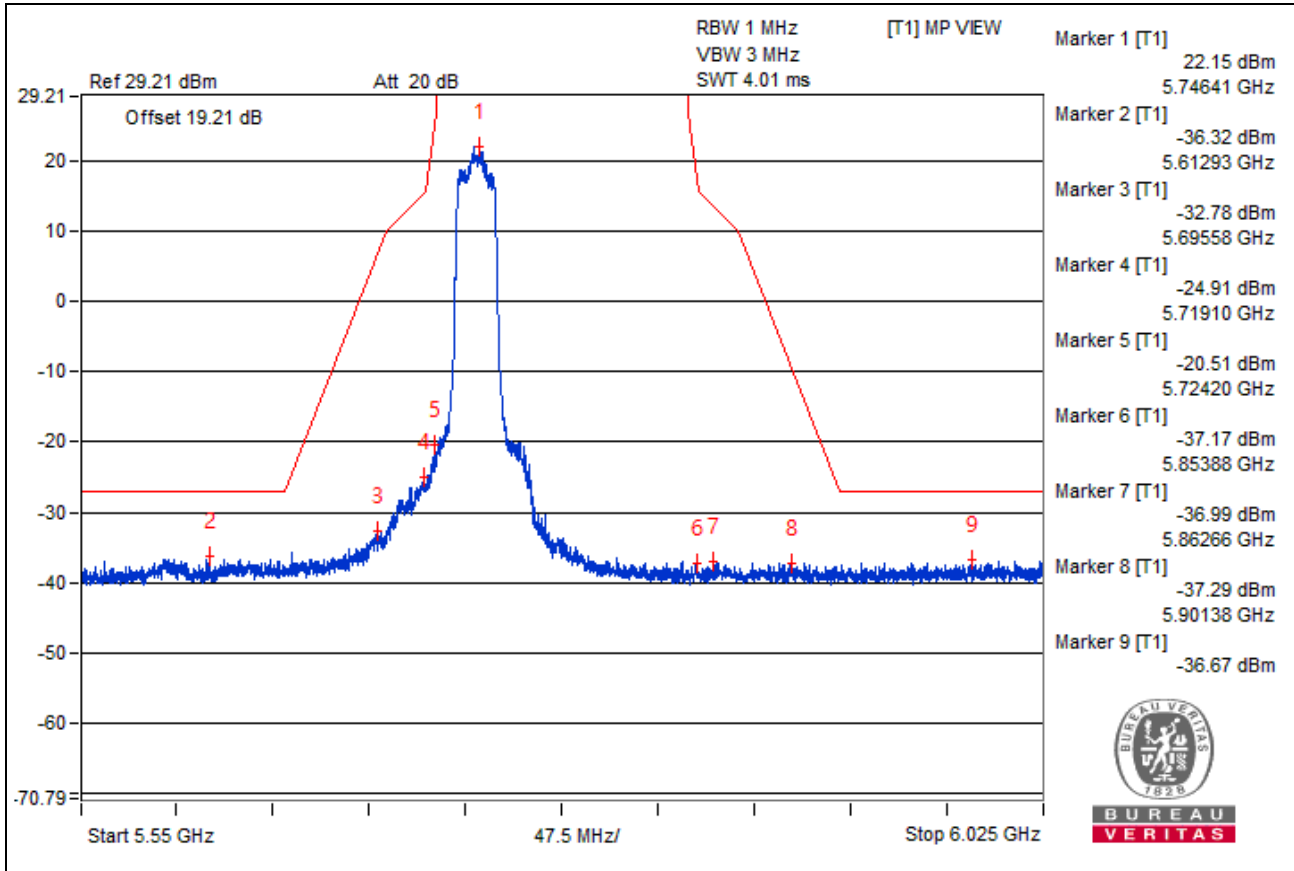

Chain 1

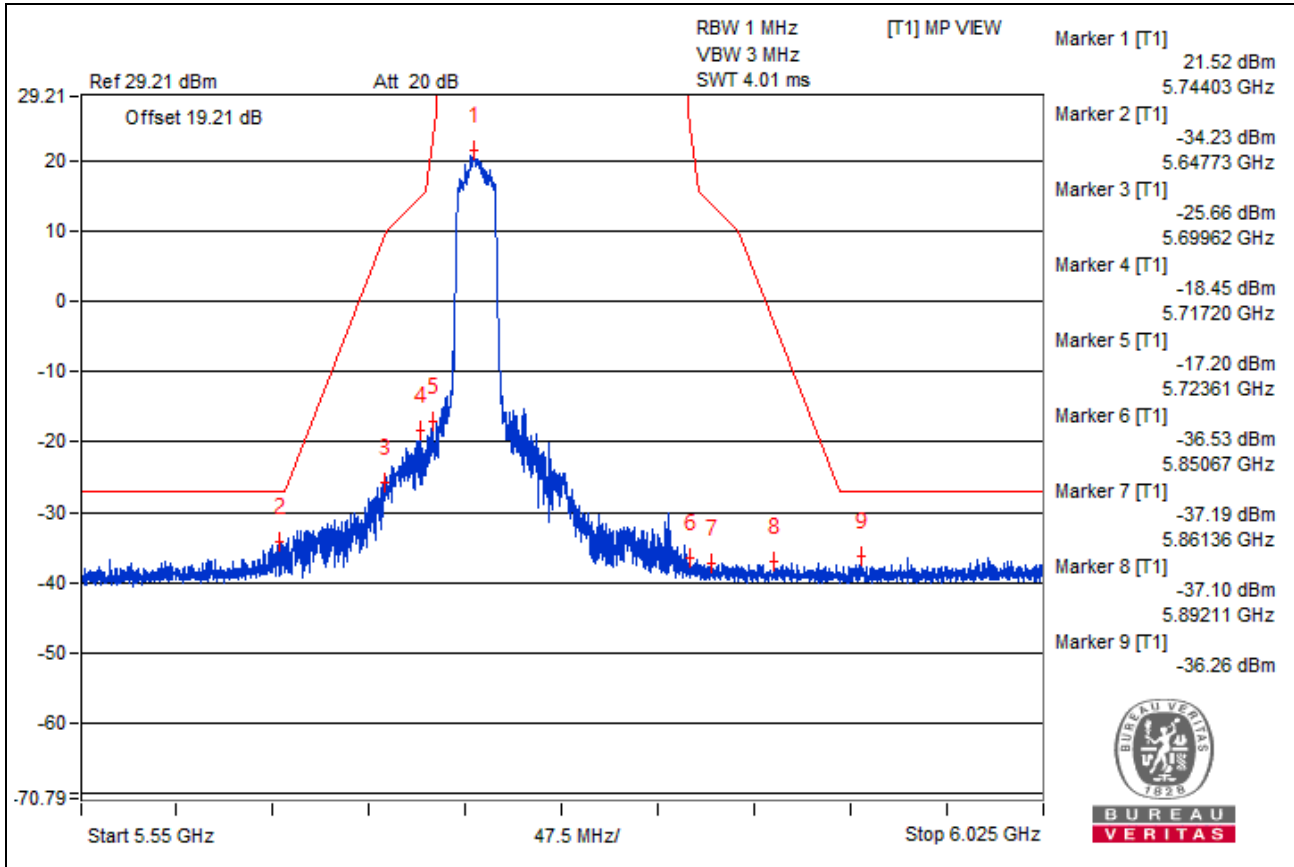

802.11ax (HE20) – Channel 157


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3850 PK	57.23	74	-16.77	-48.48	-50.1	8.17	-38.03
2	3854.68 AV	36.04	54	-17.96	-70.41	-70.39	8.17	-59.22
3	7703.12 PK	58.3	74	-15.7	-48.36	-47.93	8.17	-36.96
4	7695.31 AV	36.79	54	-17.21	-69.64	-69.66	8.17	-58.47
5	11589.06 PK	60.28	74	-13.72	-46.36	-45.97	8.17	-34.98
6	11568.75 AV	39.45	54	-14.55	-67.67	-66.41	8.17	-55.81
7	17364 PK	52.23	68.2	-15.97	-55.22	-53.39	8.17	-43.03


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

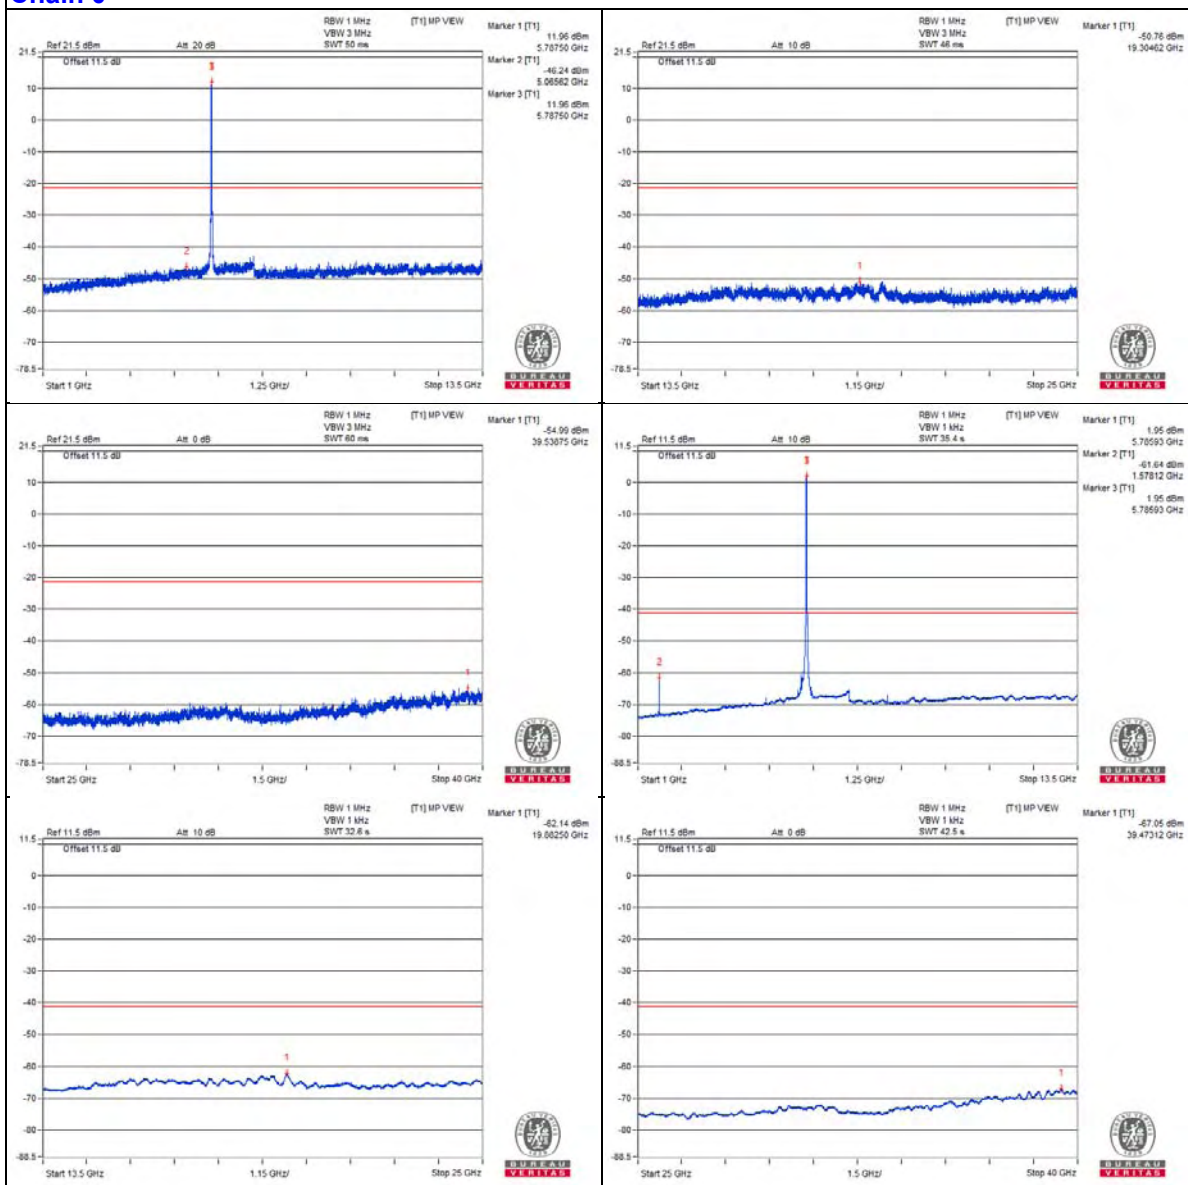


Chain 1

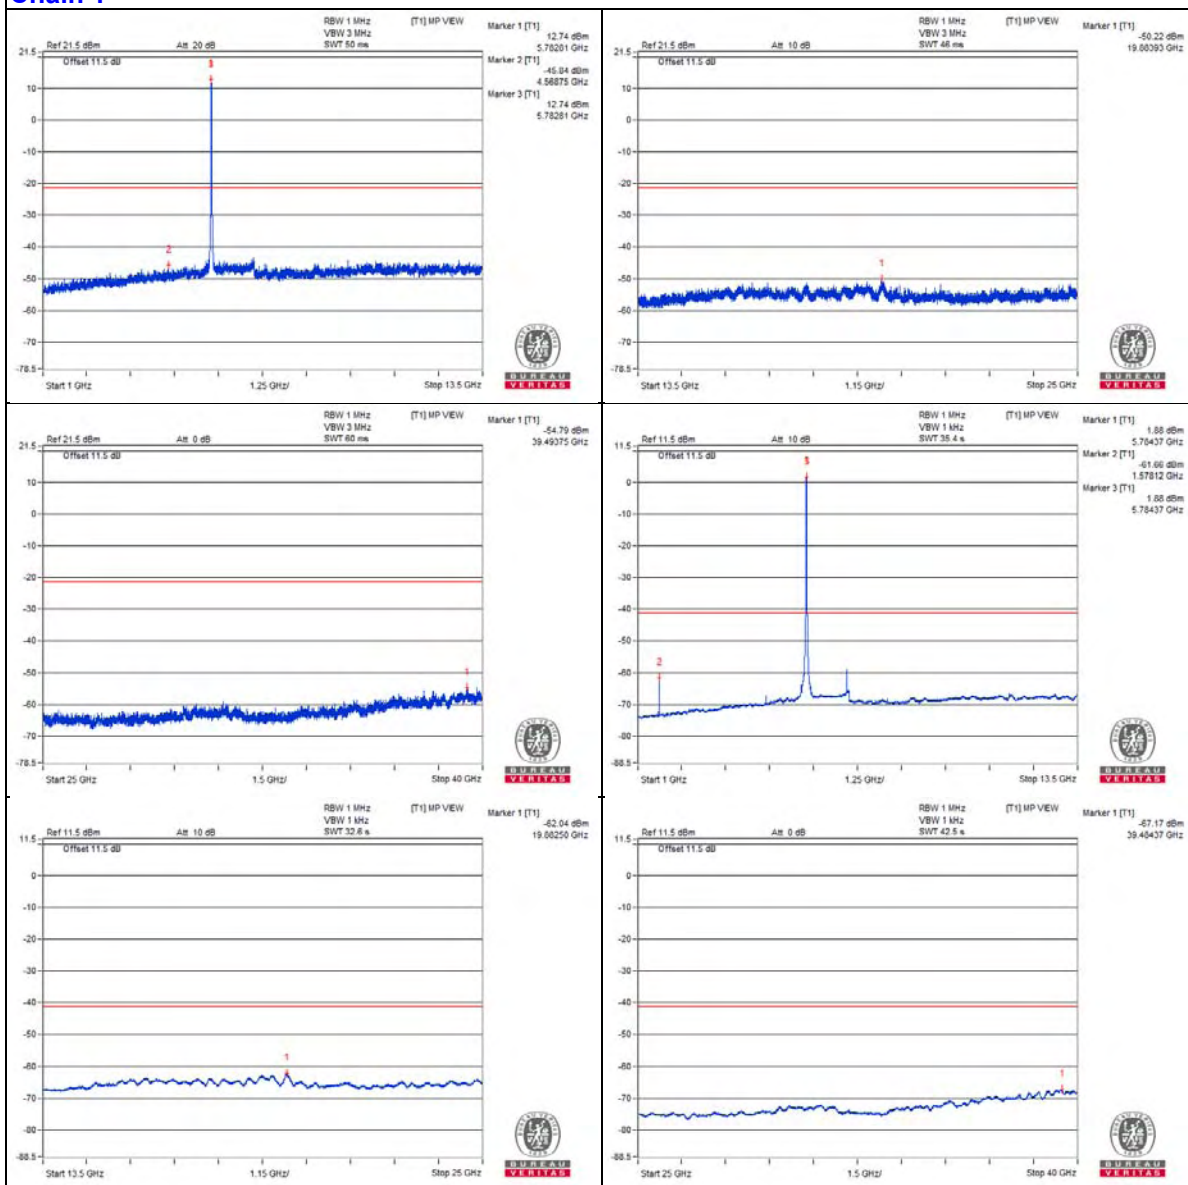


Bandedge table

Chain 0

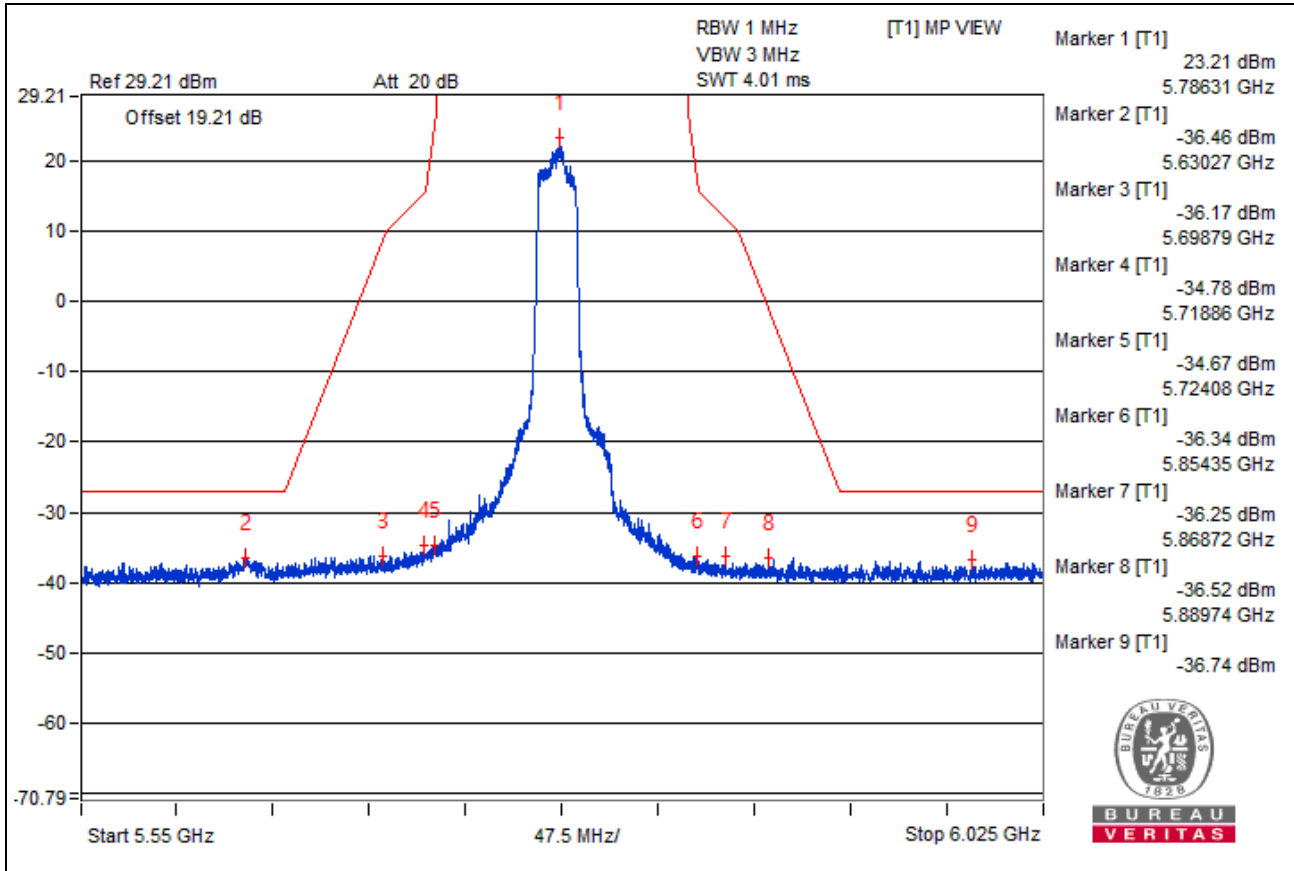

Chain 1

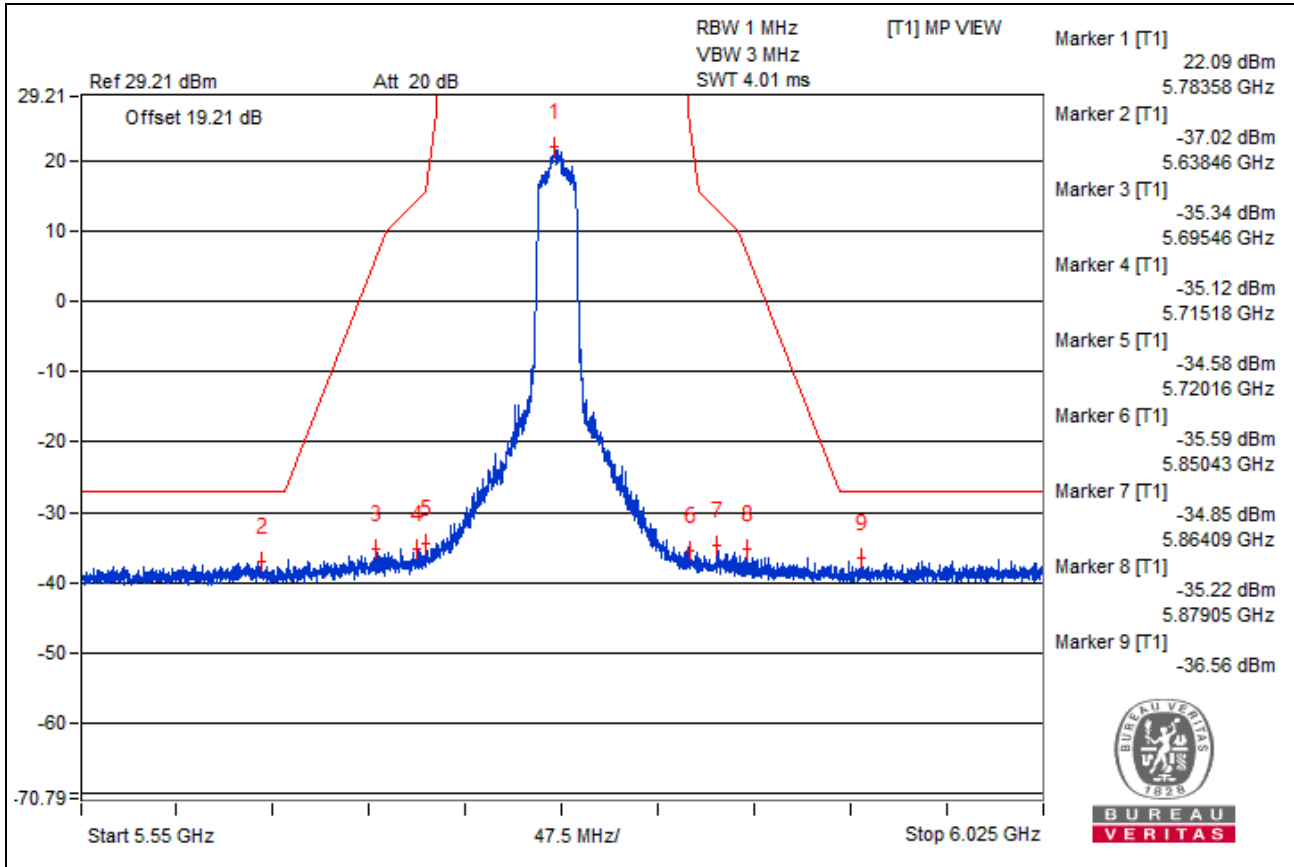

802.11ax (HE20) – Channel 165

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3903.12 PK	57.63	74	-16.37	-50.49	-47.6	8.17	-37.63
2	3892.18 AV	35.95	54	-18.05	-70.55	-70.43	8.17	-59.31
3	7751.56 PK	58.84	68.2	-9.36	-46.92	-48.4	8.17	-36.42
4	11651.56 PK	61.12	74	-12.88	-45.59	-45.07	8.17	-34.14
5	11650 AV	40.83	54	-13.17	-66.68	-64.76	8.17	-54.43
6	17484.75 PK	53.69	68.2	-14.51	-52.34	-53.2	8.17	-41.57


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

2. # : Non-restricted frequency, no limit for average emission.

Chain 0

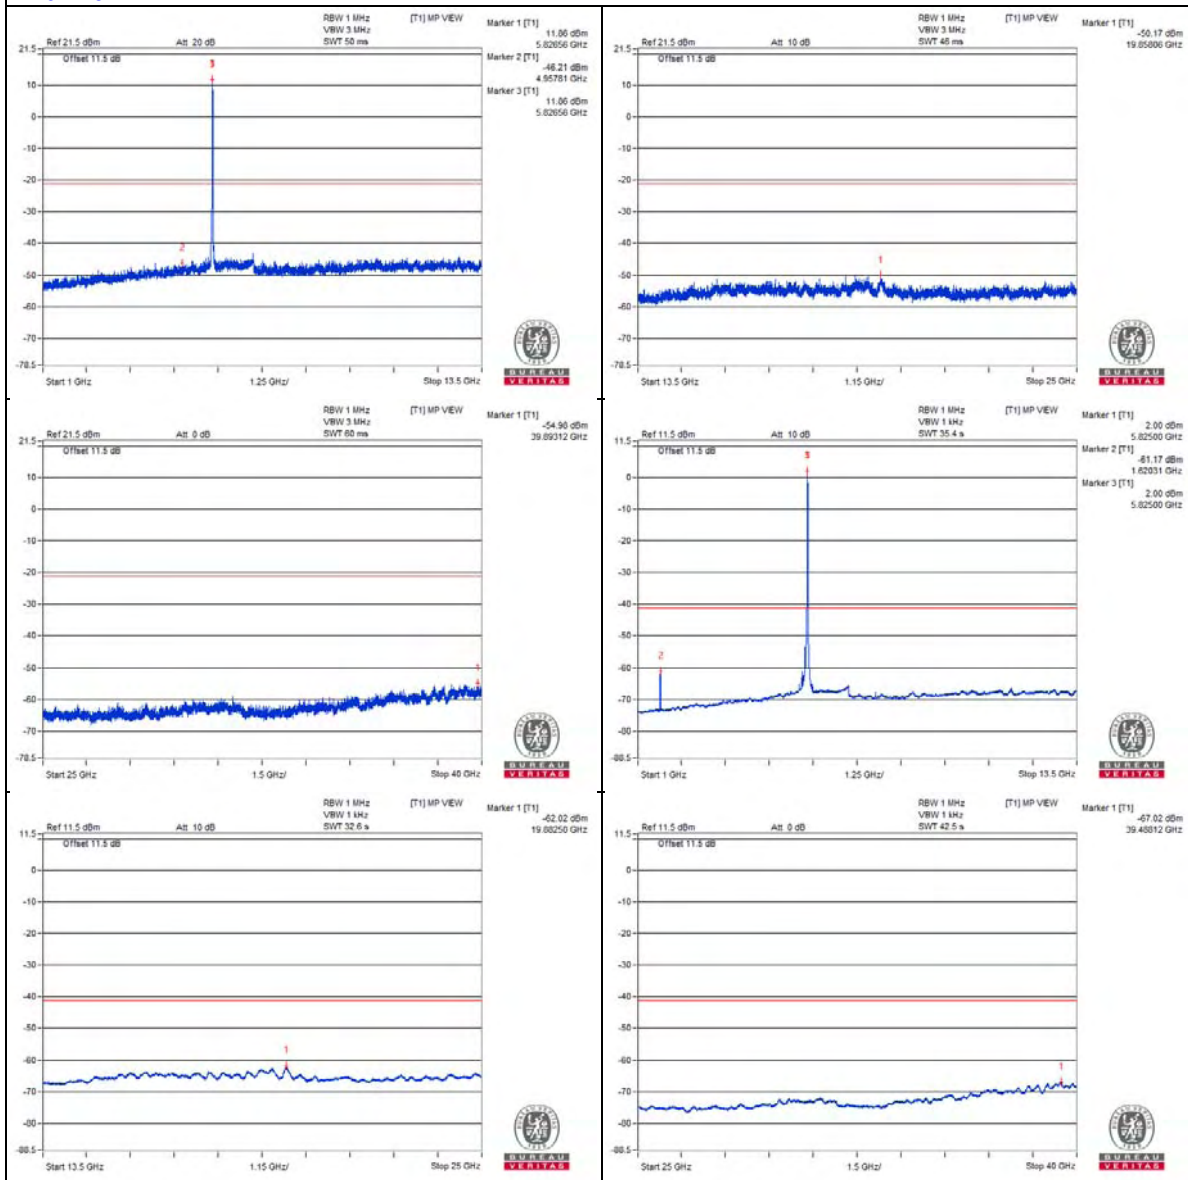


Chain 1

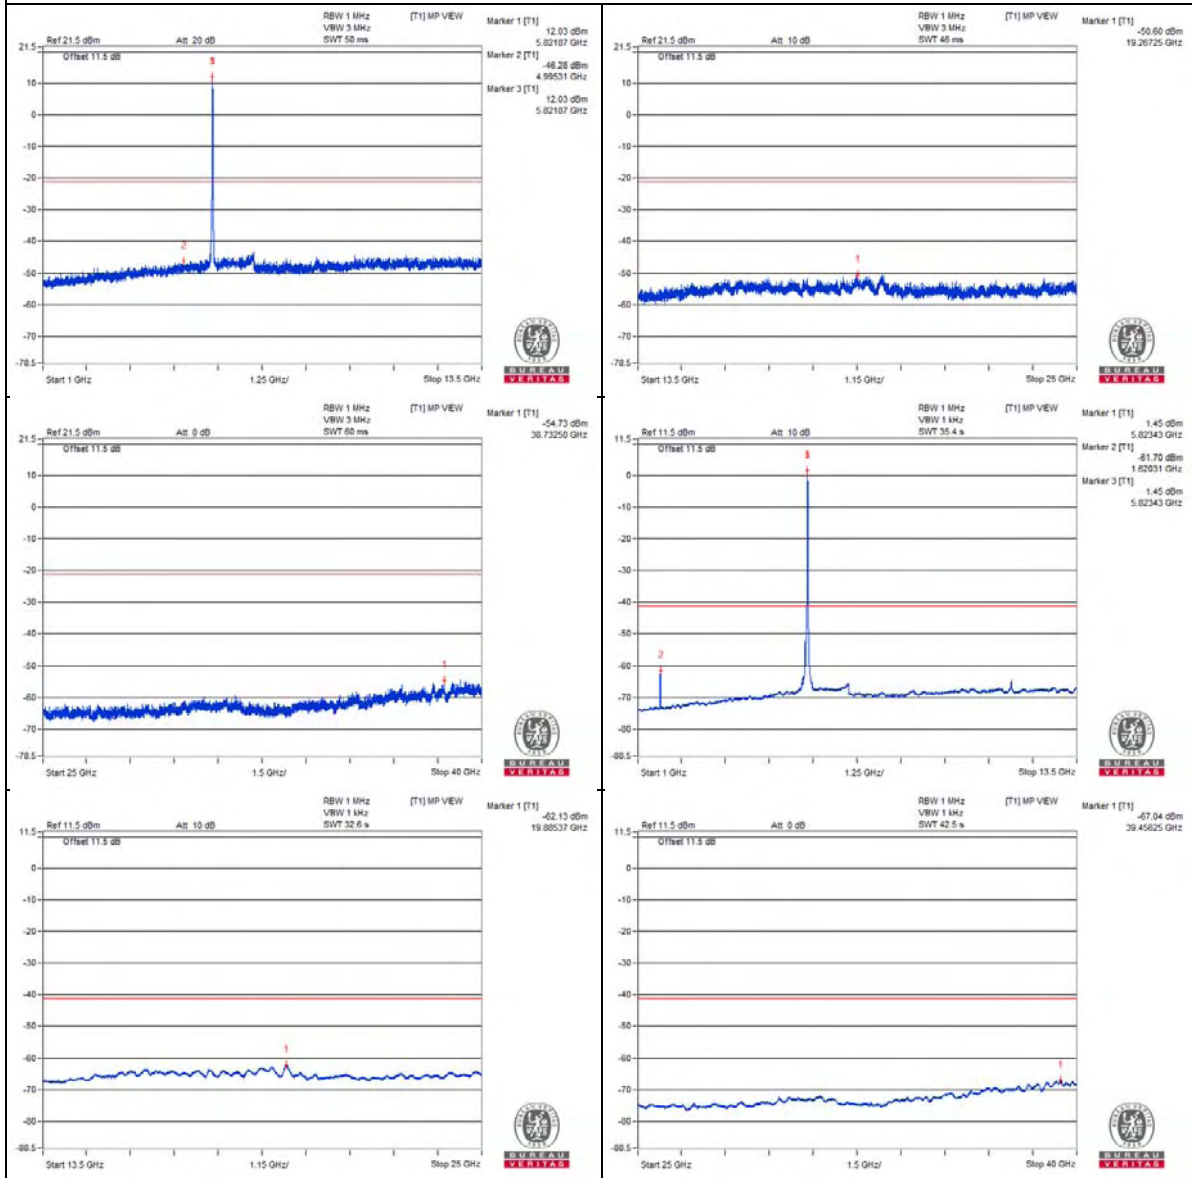


Bandedge table

Chain 0

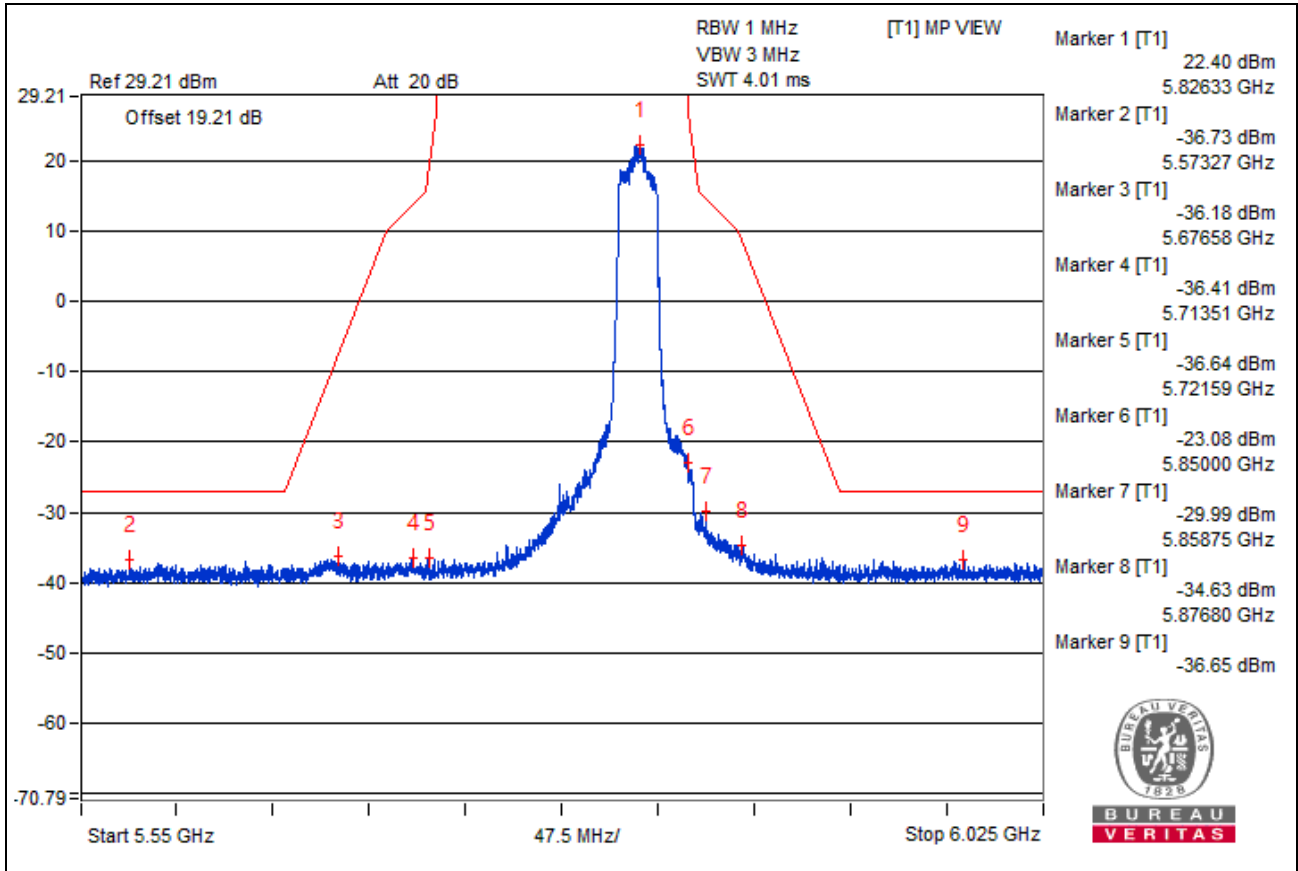

Chain 1

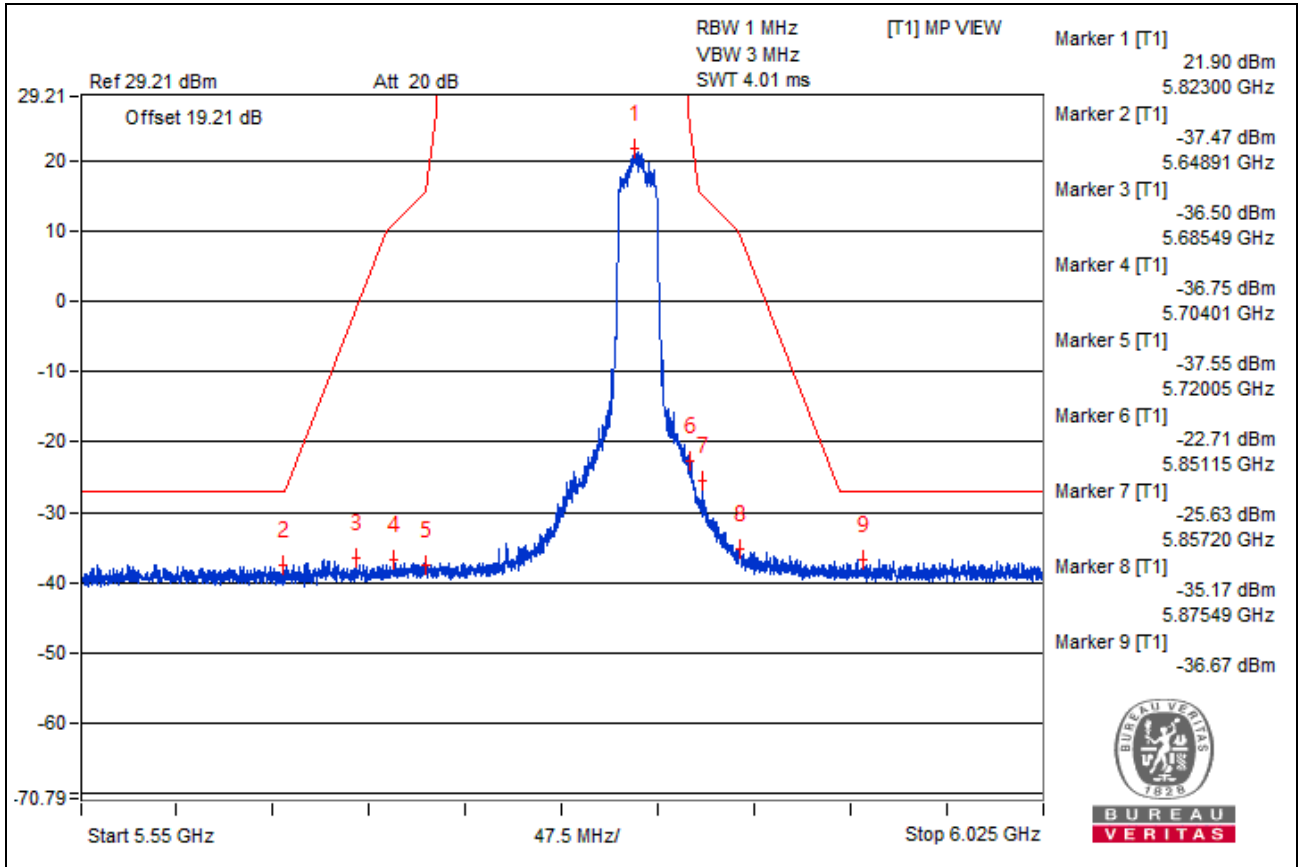

802.11ax (HE40) - Channel 38


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3479.68 PK	56.91	68.2	-11.29	-48.89	-50.28	8.17	-38.35
2	6920.31 PK	61.49	68.2	-6.71	-45.99	-44.11	8.17	-33.77
3	10384.37 PK	60.46	68.2	-7.74	-46	-45.97	8.17	-34.8
4	15557.06 PK	53.09	74	-20.91	-53.22	-53.48	8.17	-42.17
5	15558.5 AV	42.1	54	-11.9	-64.51	-64.18	8.17	-53.16


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

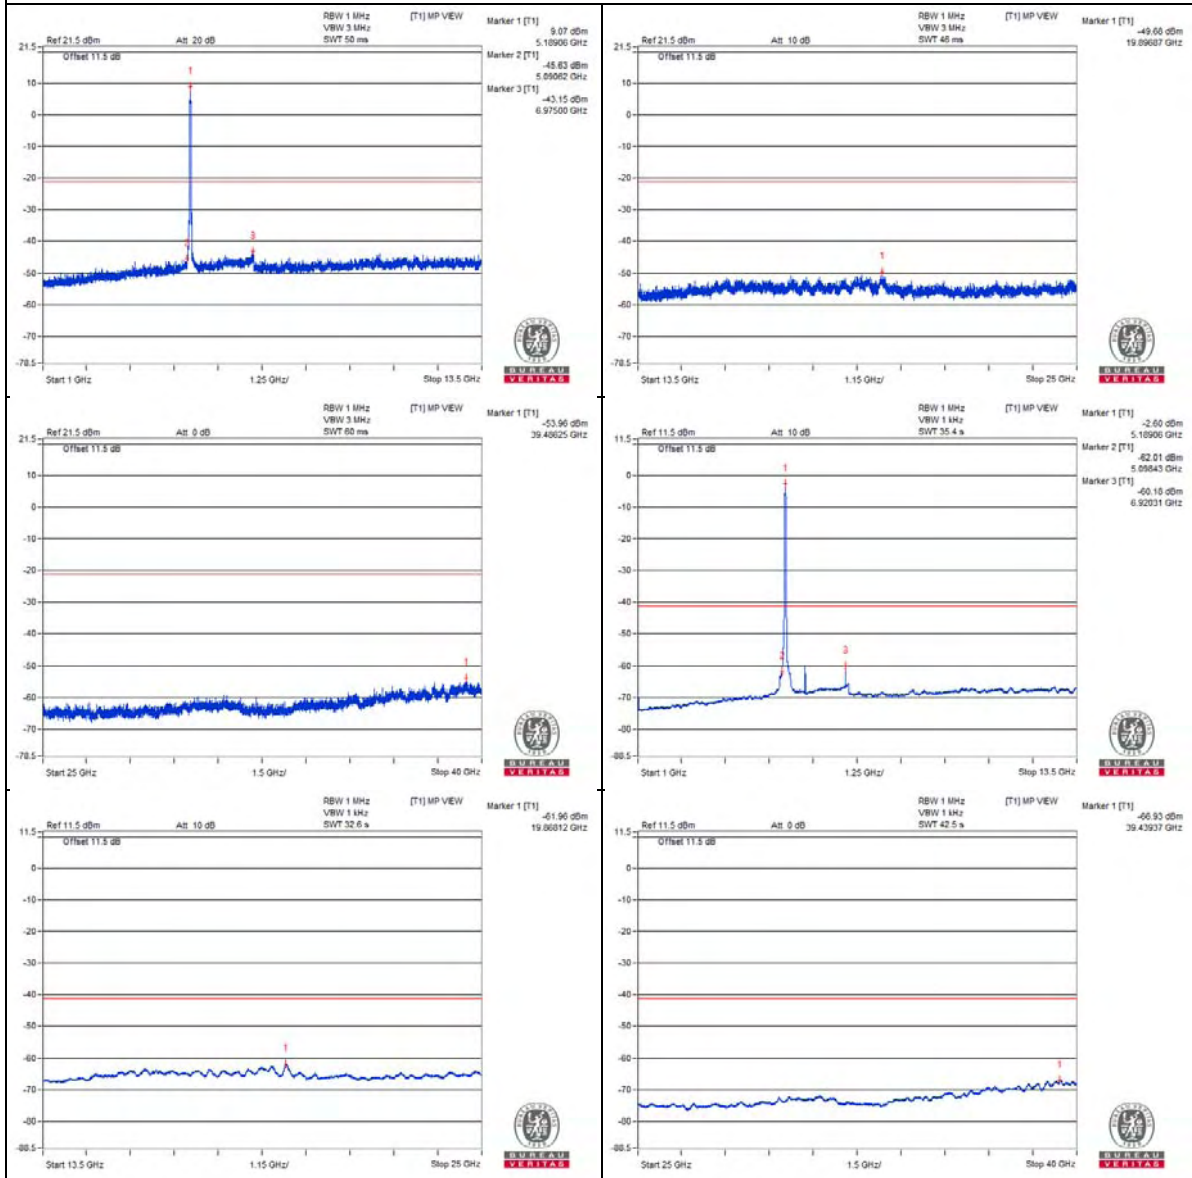

Chain 1

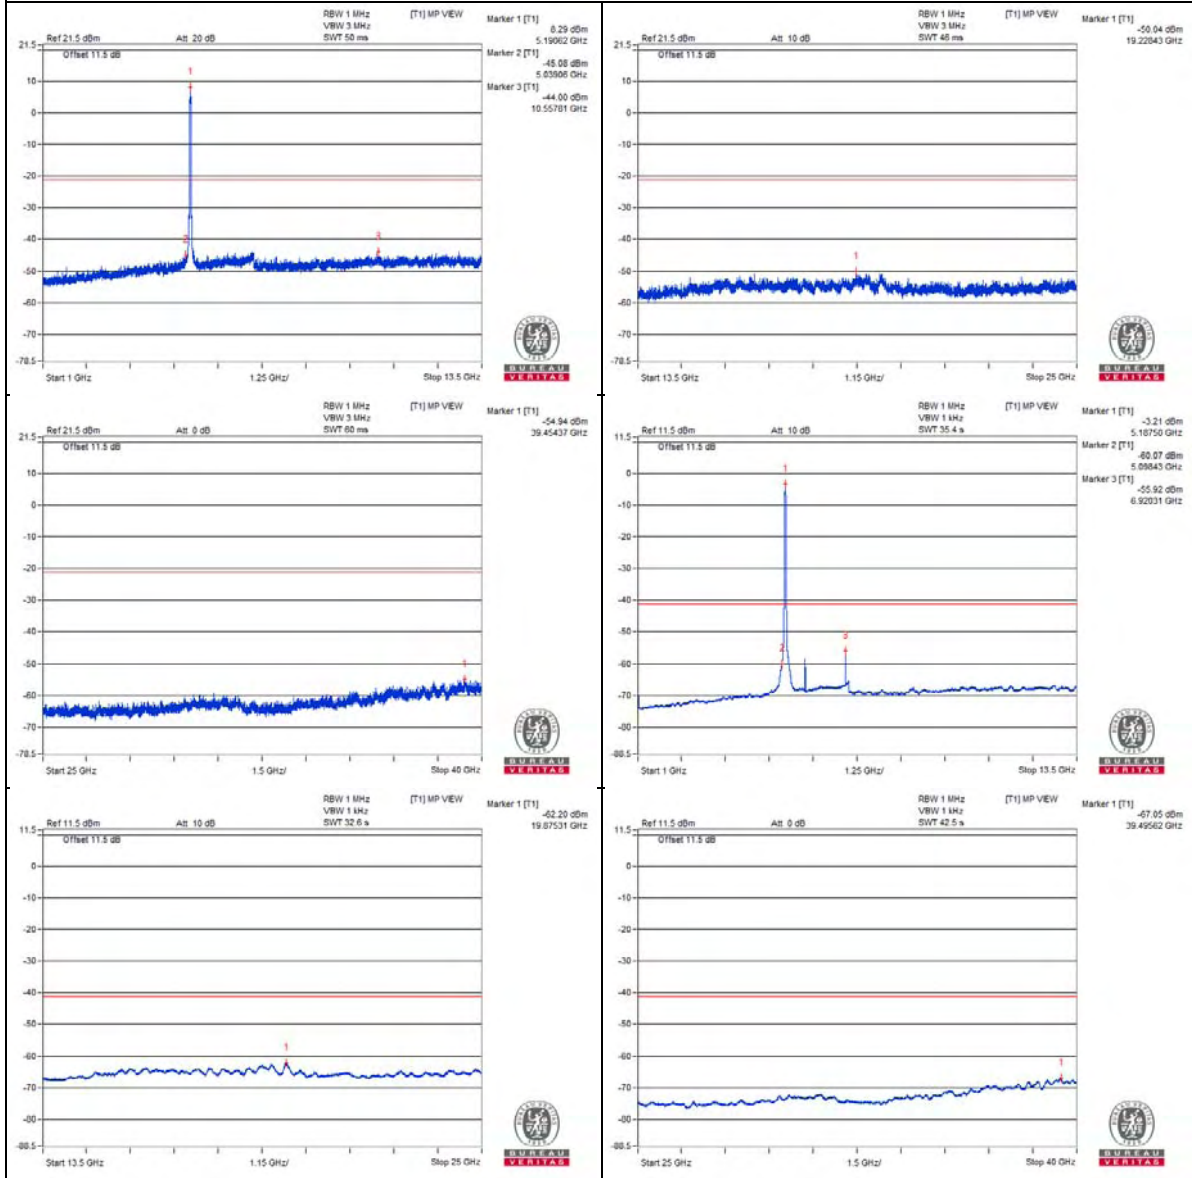

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5149.3 PK	74.59	74	*0.59	-33.77	-28.06	6.36	-20.67
2	5149.9 AV	59.2	54	*5.2	-47.33	-44.12	6.36	-36.06


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

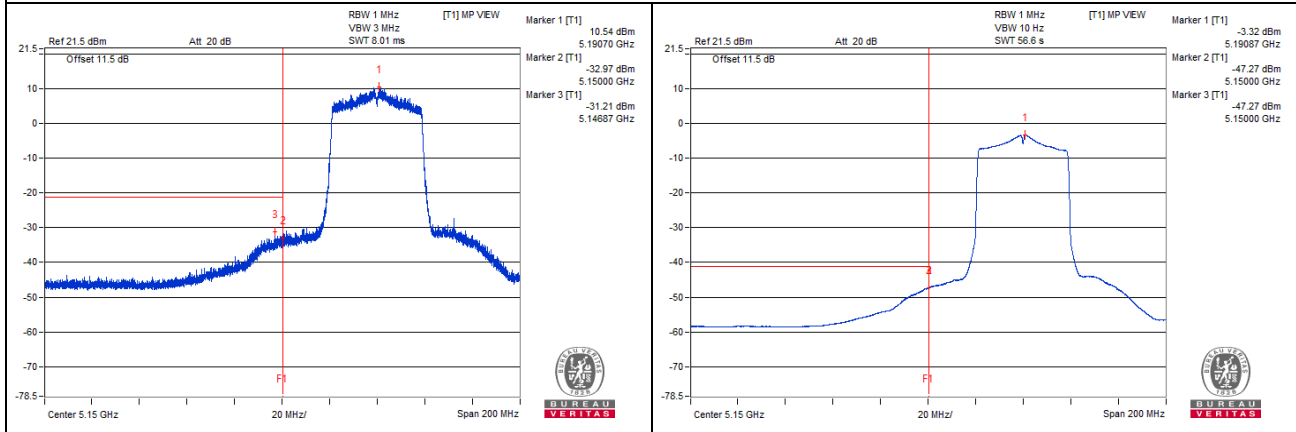

Chain 1

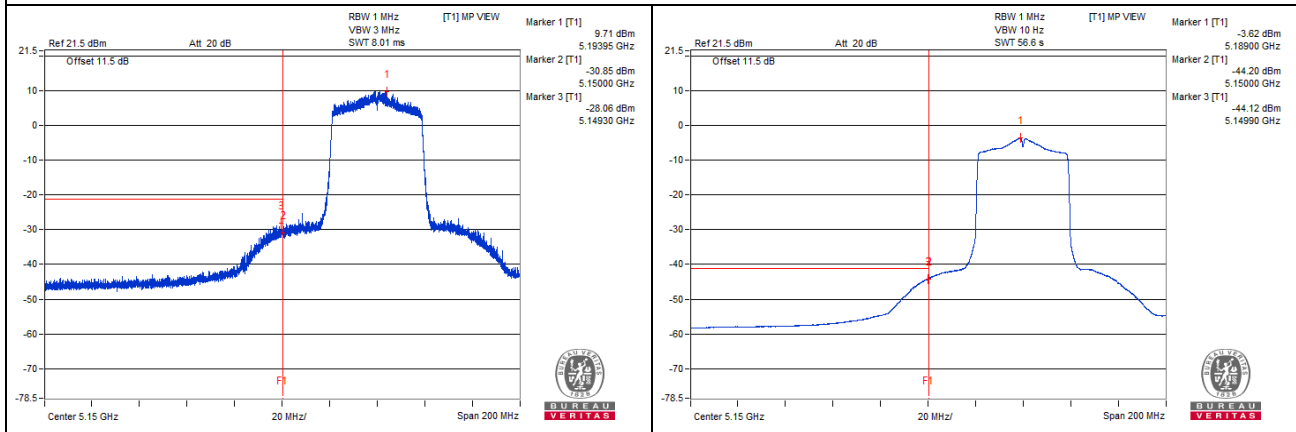

802.11ax (HE40) - Channel 46

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3501.47 PK	57.21	74	-16.79	-48.45	-49.36	7.82	-38.05
2	3501.56 AV	35.3	54	-18.7	-70.67	-70.92	7.82	-59.96
3	6990.62 PK	62.14	68.2	-6.06	-44.97	-43.13	7.82	-33.12
4	10450 PK	60.63	68.2	-7.57	-44.39	-46.89	7.82	-34.63
5	15686.43 PK	52.3	74	-21.7	-53.65	-53.93	7.82	-42.96
6	15700.81 AV	41.64	54	-12.36	-64.39	-64.51	7.82	-53.62


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

2. # : Non-restricted frequency, no limit for average emission.

Chain 0

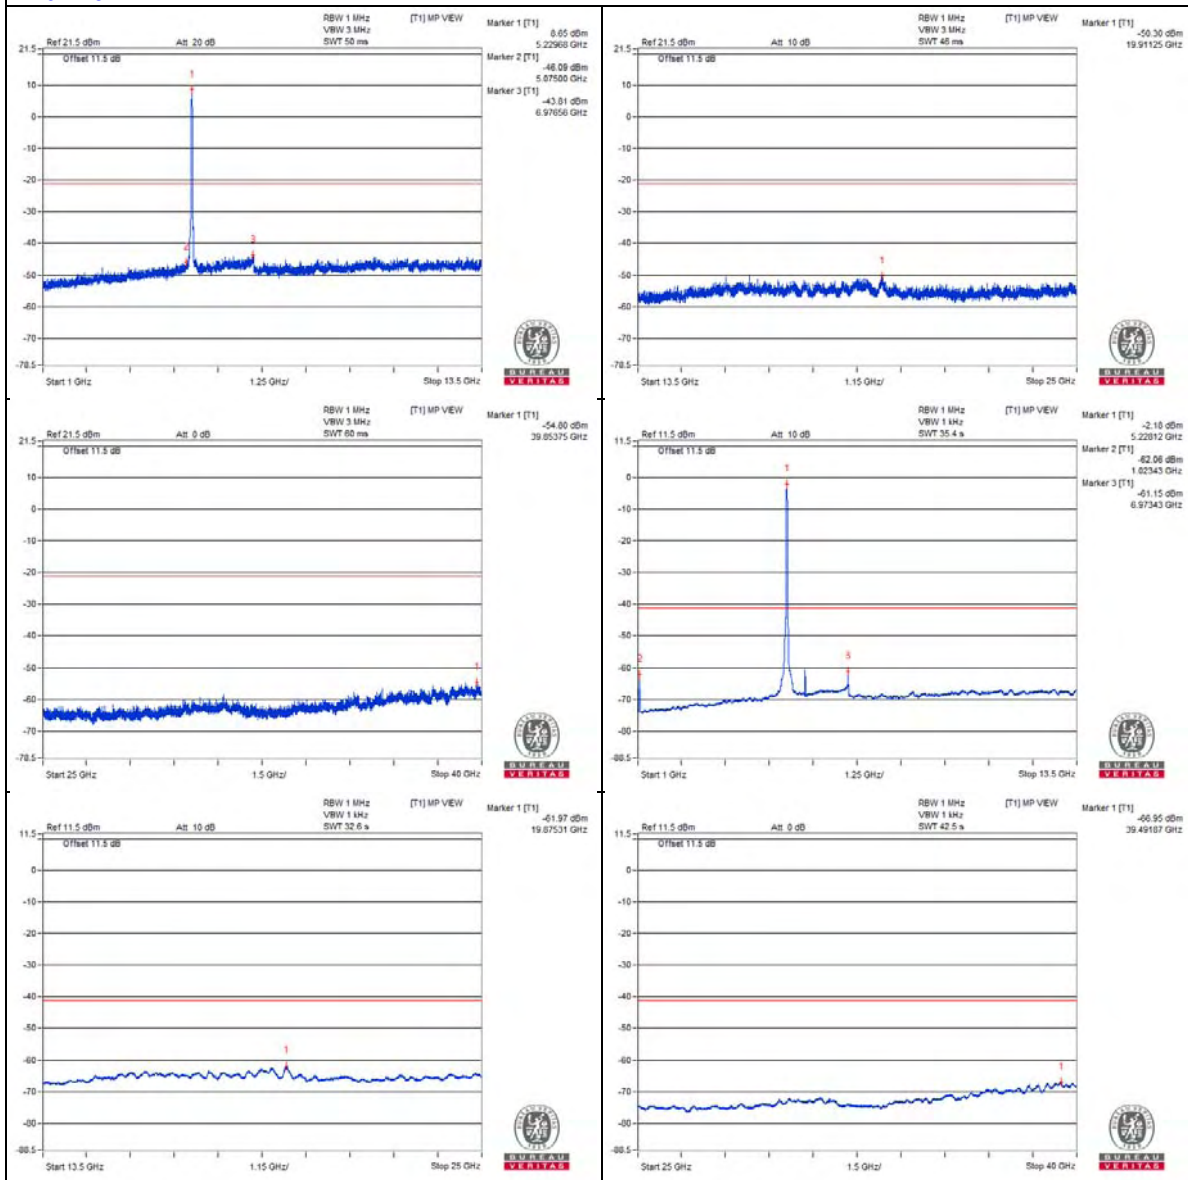

Chain 1

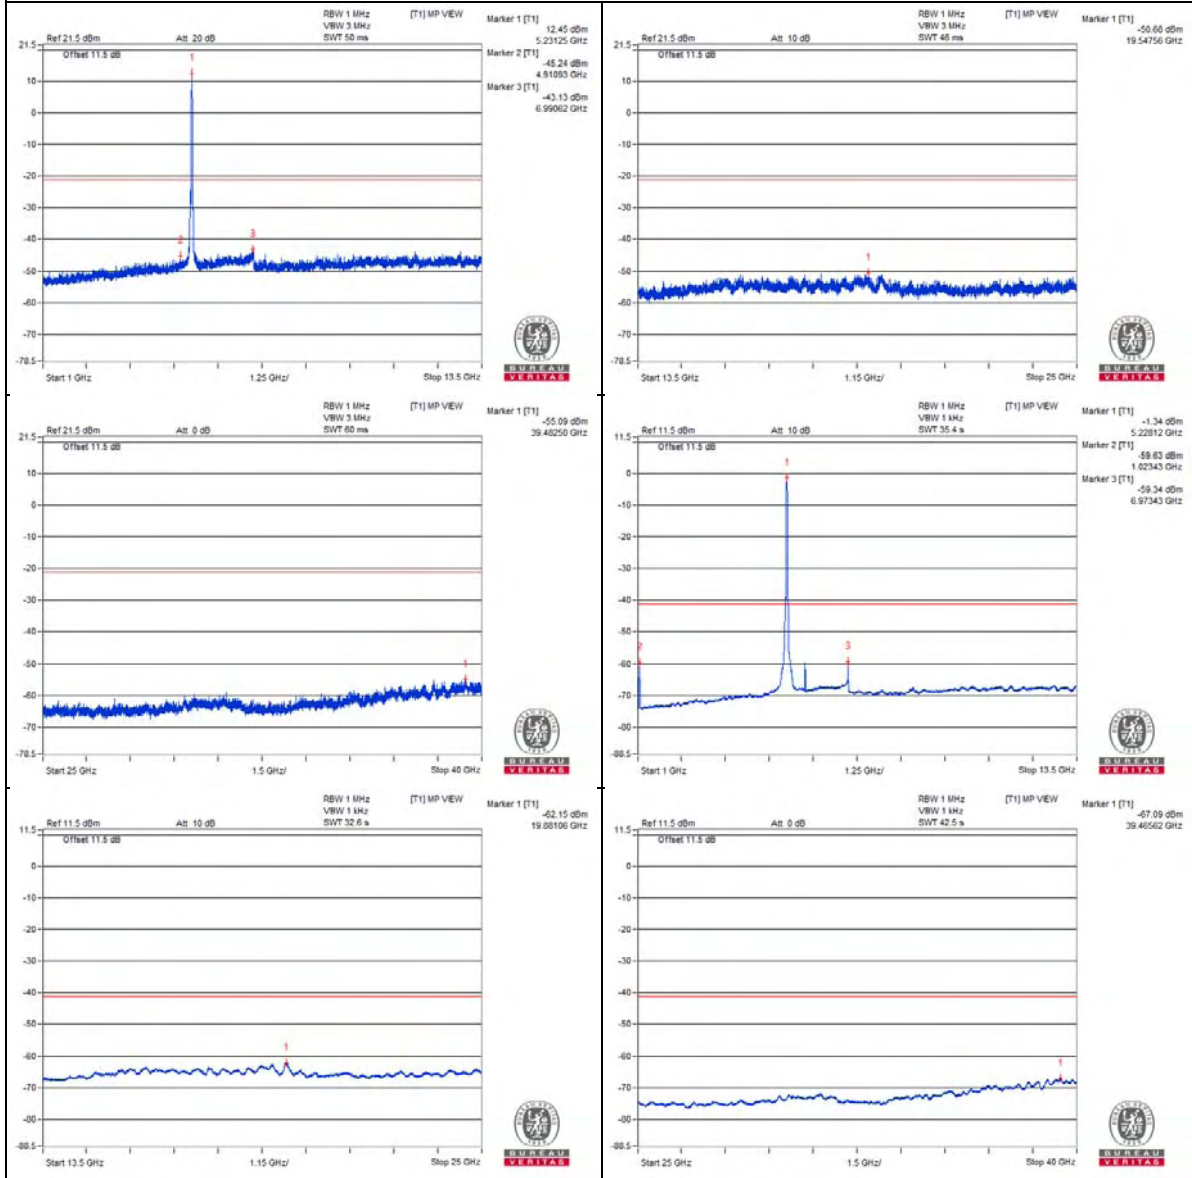

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5147.32 PK	61.42	74	-12.58	-43.22	-43.21	6.36	-33.84
2	5149.72 AV	48.06	54	-5.94	-57.31	-55.93	6.36	-47.2

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

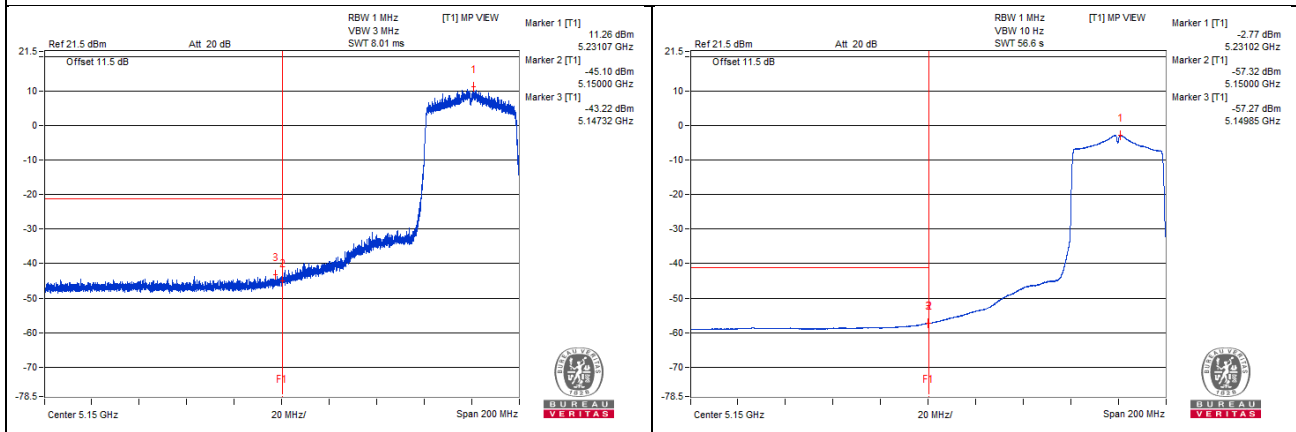

Chain 1

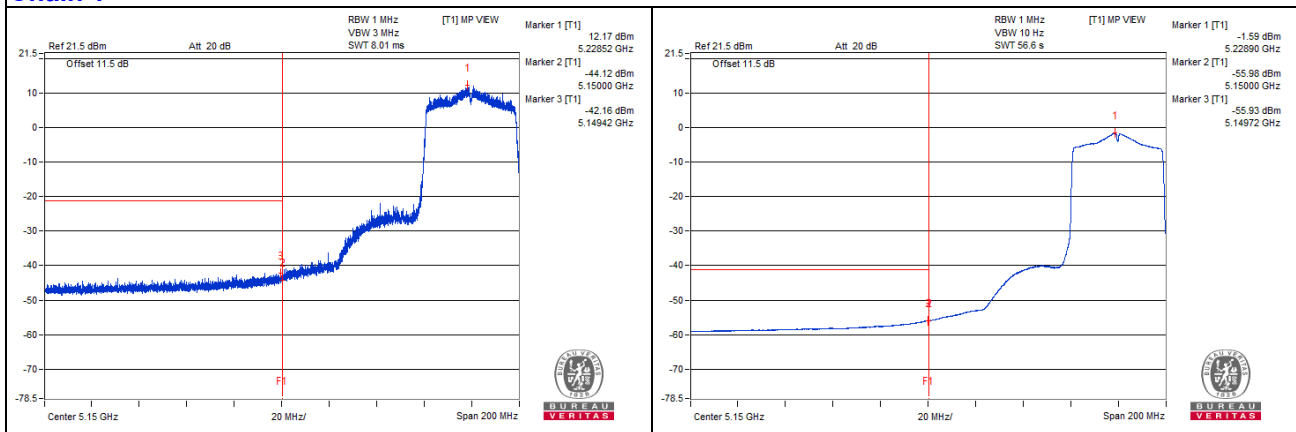

802.11ax (HE40) - Channel 54


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3531.25 PK	56.95	74	-17.05	-50.44	-48.71	8.17	-38.31
2	3523.43 AV	35.68	54	-18.32	-70.58	-70.95	8.17	-59.58
3	7026.56 PK	59.29	68.2	-8.91	-48.05	-46.4	8.17	-35.97
4	10529.68 PK	60.84	68.2	-7.36	-45.37	-45.85	8.17	-34.42
5	15821.56 PK	54.13	74	-19.87	-53.05	-51.68	8.17	-41.13
6	15815.81 AV	42.25	54	-11.75	-64.19	-64.2	8.17	-53.01


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

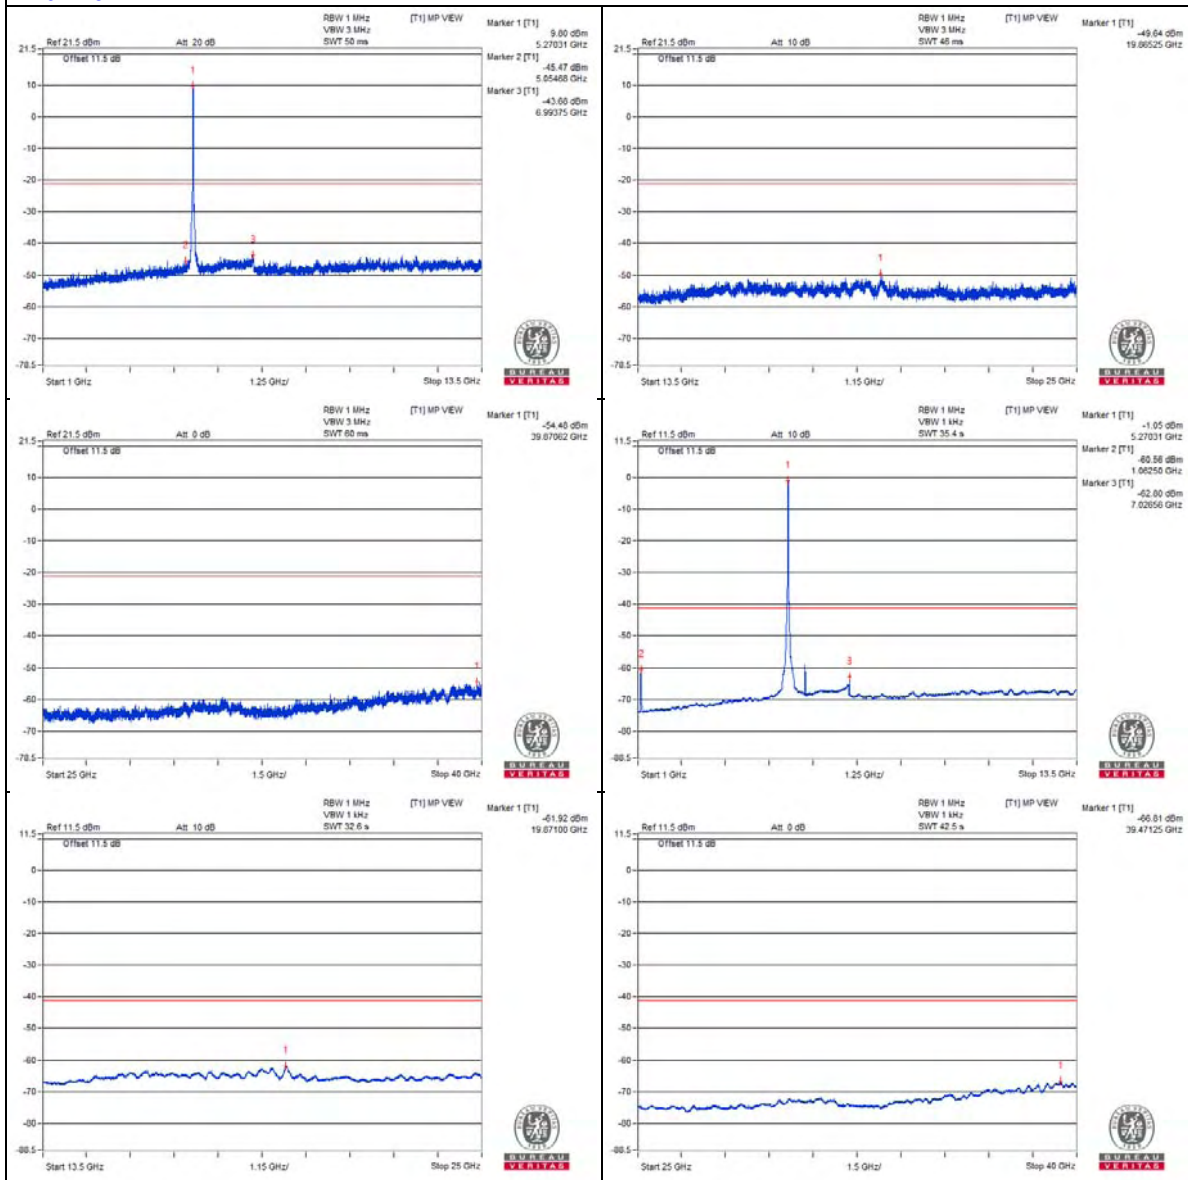

Chain 1

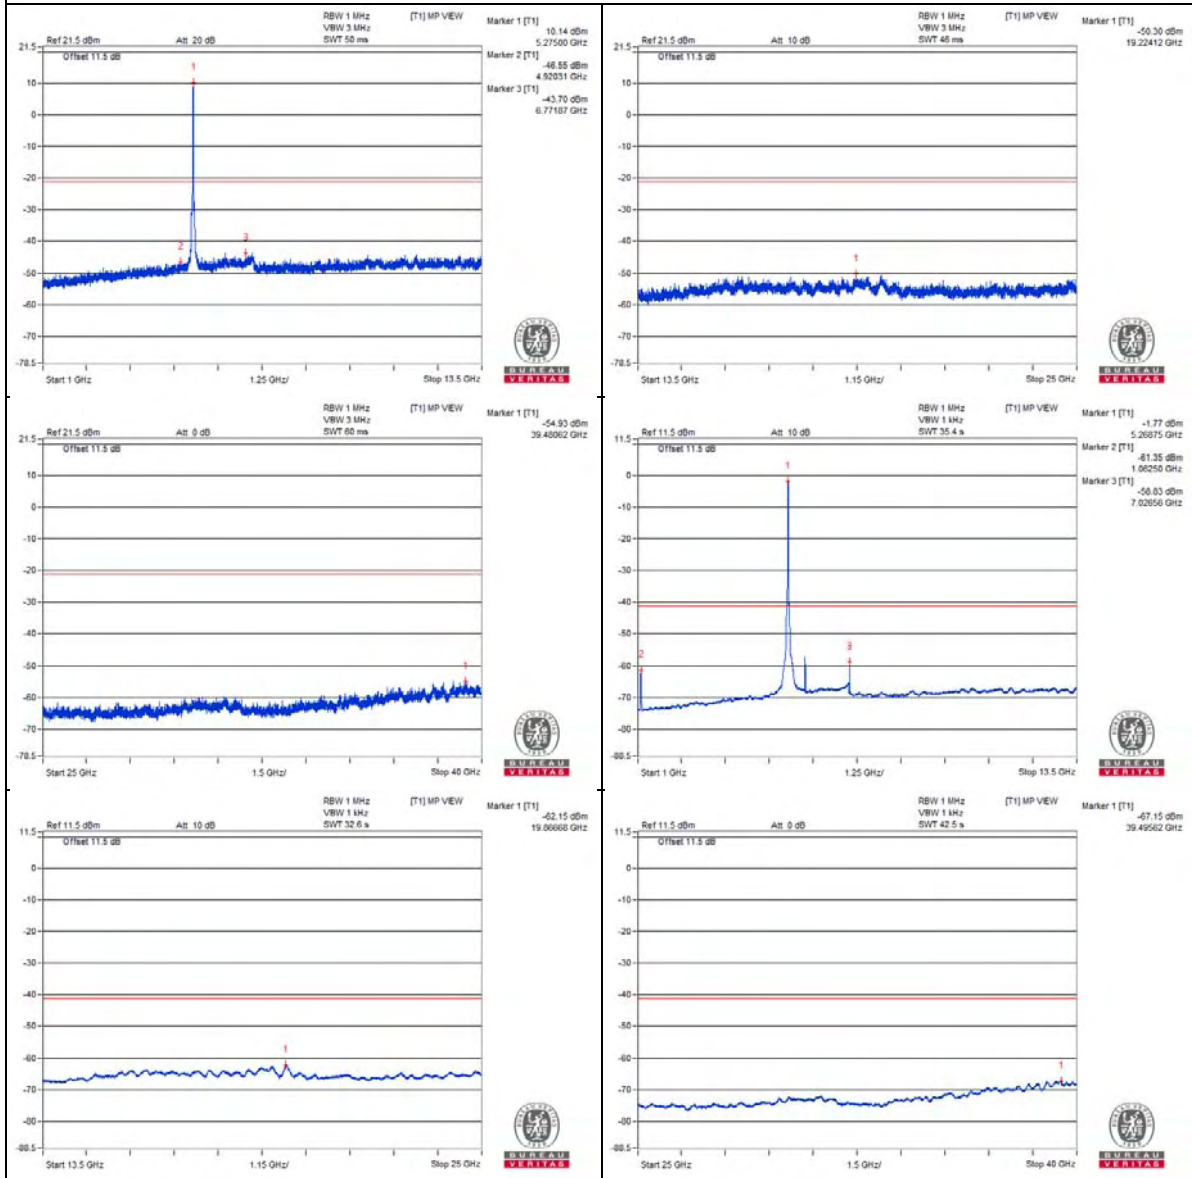

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5351.05 PK	62.68	74	-11.32	-43.39	-40.98	6.43	-32.58
2	5350.15 AV	49.08	54	-4.92	-55.71	-55.54	6.43	-46.18

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

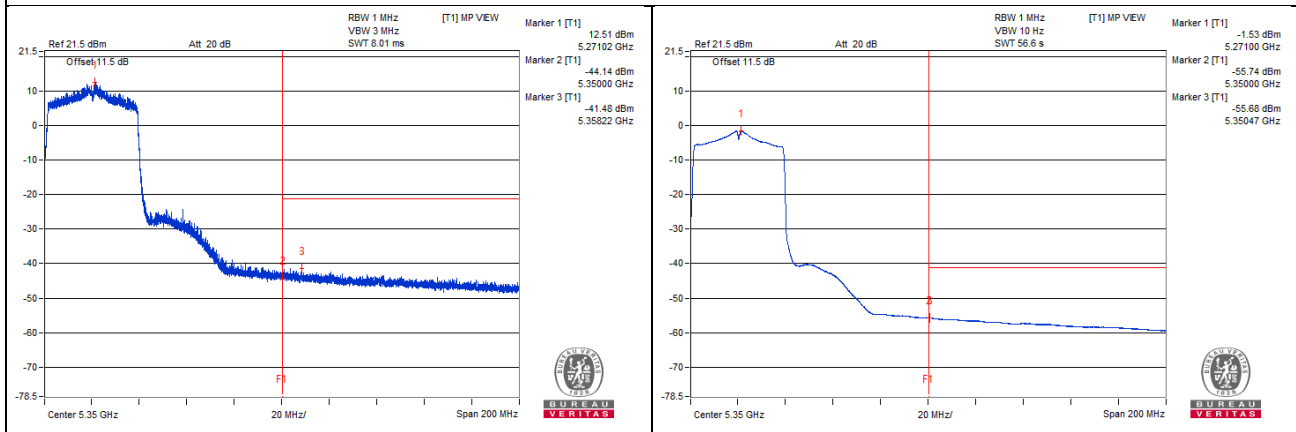

Chain 1

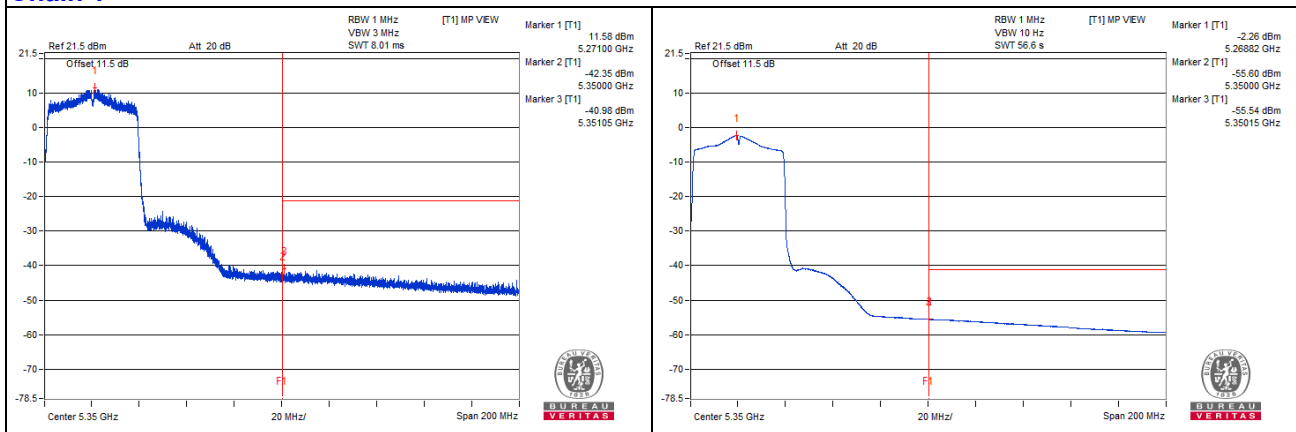

802.11ax (HE40) - Channel 62


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3551.56 PK	57.18	74	-16.82	-49.48	-49.06	8.17	-38.08
2	3545.31 AV	35.75	54	-18.25	-70.49	-70.9	8.17	-59.51
3	7062.5 PK	58.98	68.2	-9.22	-46.68	-48.41	8.17	-36.28
4	10604.68 PK	60.37	74	-13.63	-45.41	-46.86	8.17	-34.89
5	10623.43 AV	38.84	54	-15.16	-67.63	-67.58	8.17	-56.42
6	15940.87 PK	53.3	74	-20.7	-51.42	-56.02	8.17	-41.96
7	15912.12 AV	41.39	54	-12.61	-64.78	-65.34	8.17	-53.87


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

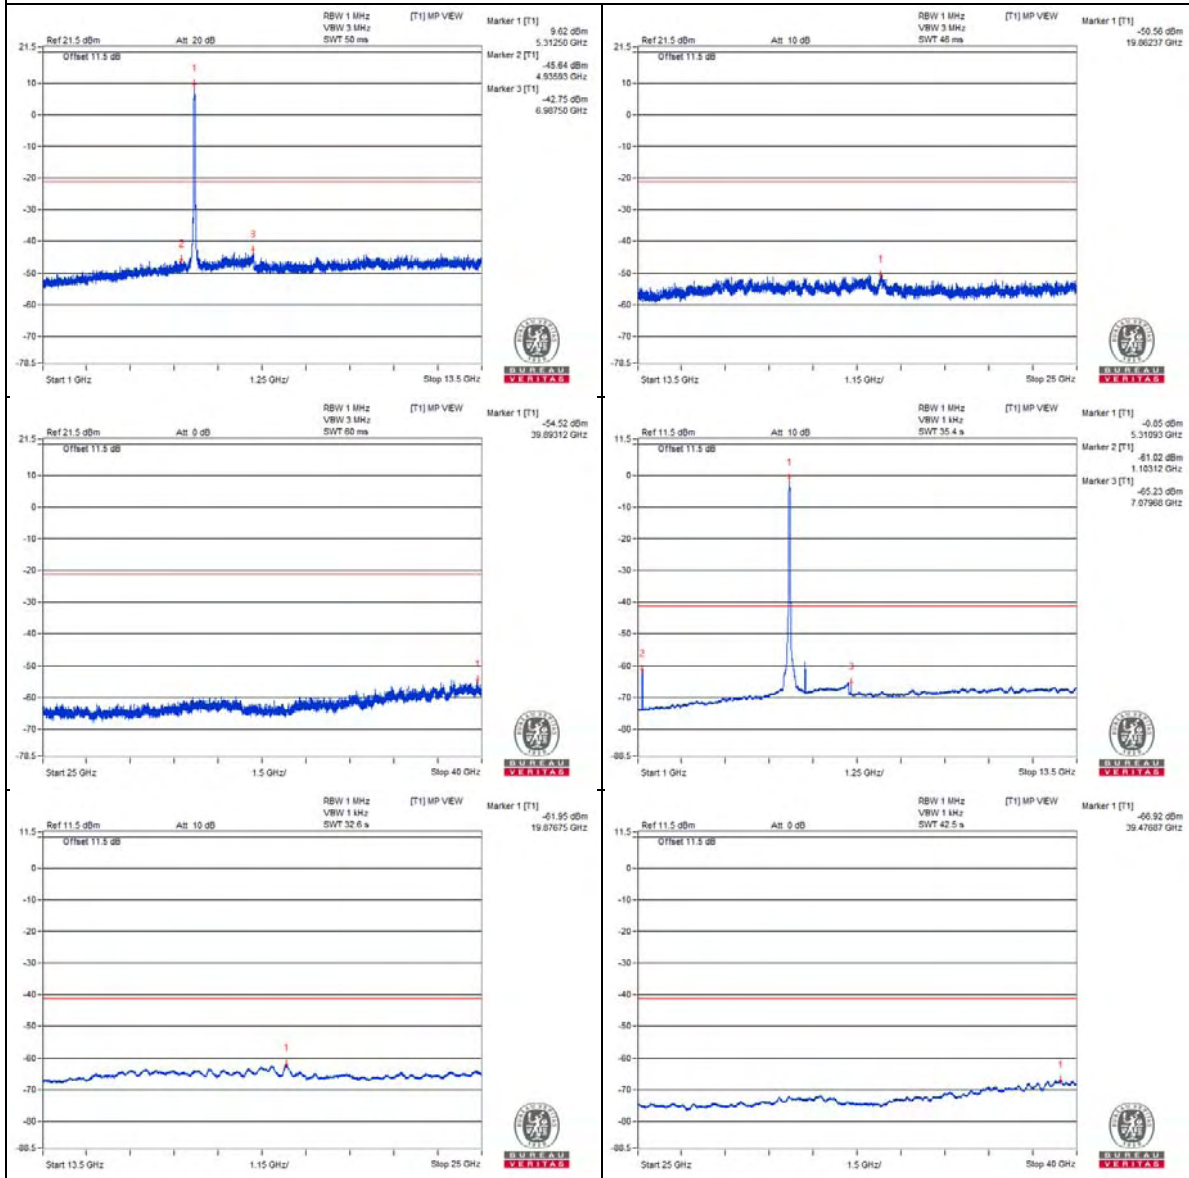

Chain 1

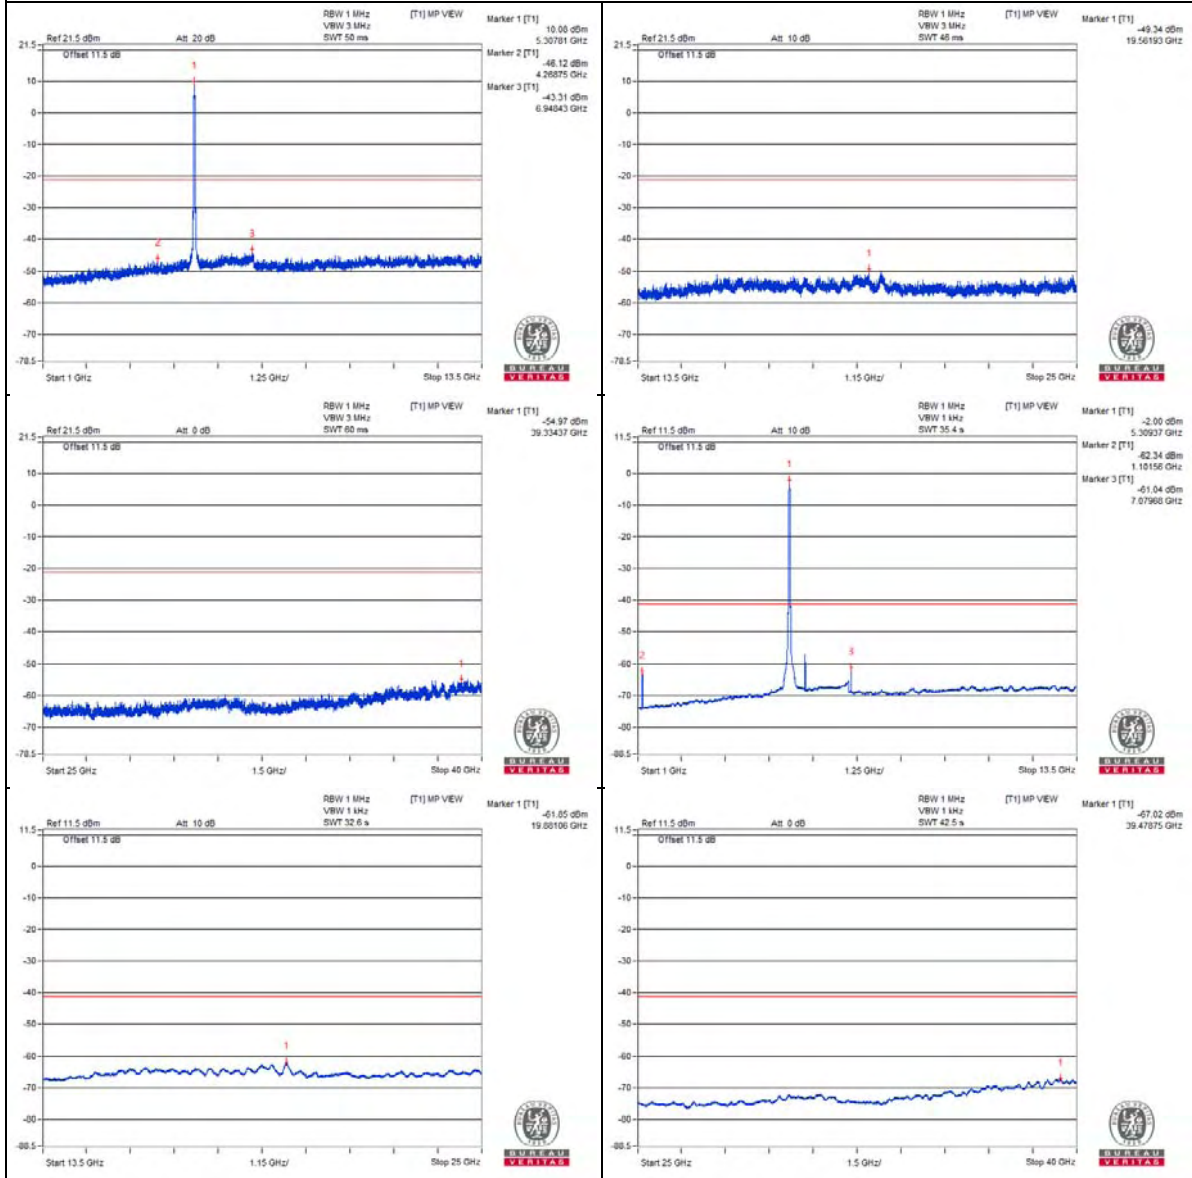

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.42 PK	74.68	74	*0.68	-28.86	-31.62	6.43	-20.58
2	5350 AV	59.86	54	*5.86	-44.17	-45.63	6.43	-35.4

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

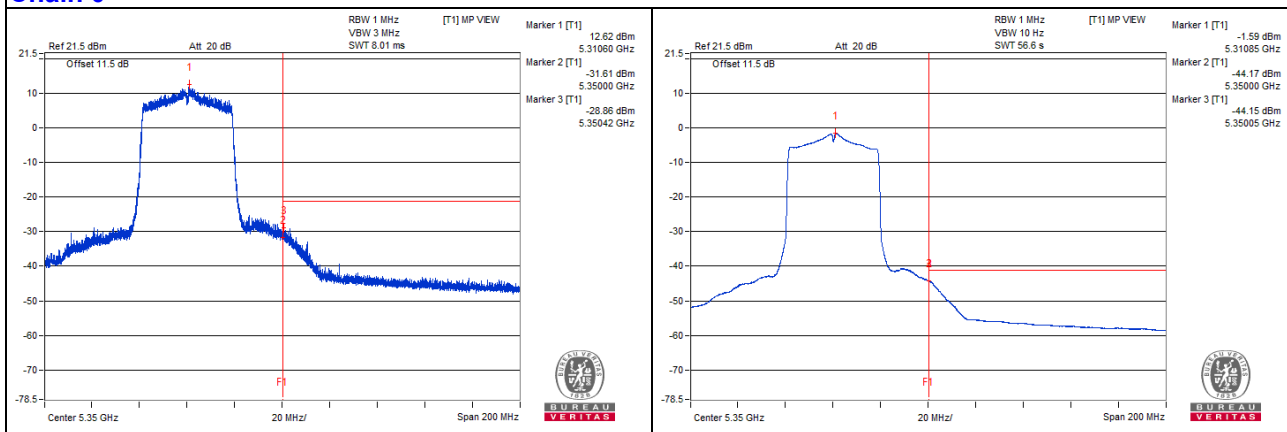

Chain 1

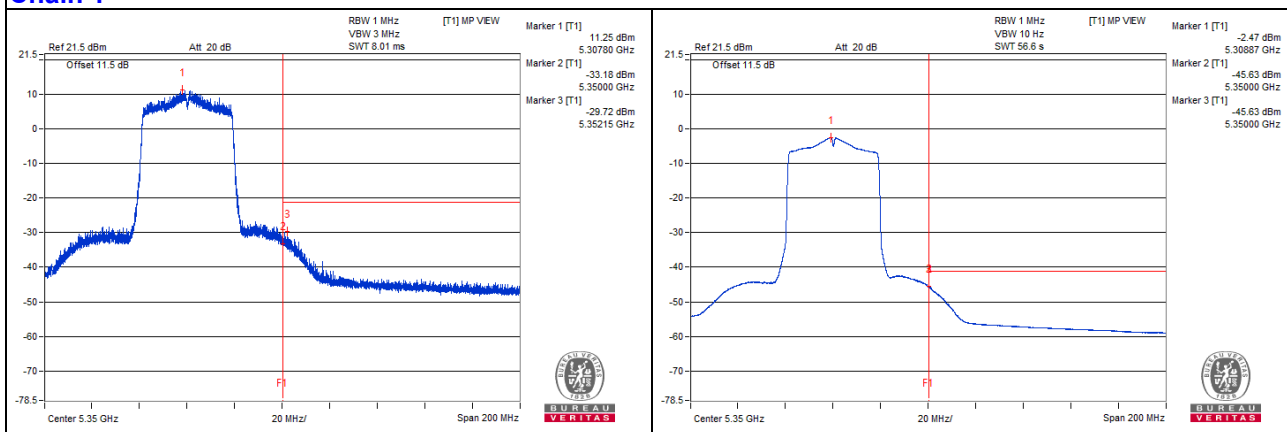

802.11ax (HE40) - Channel 102


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3682.81 PK	57.66	74	-16.34	-48.69	-48.88	8.17	-37.6
2	3675 AV	35.69	54	-18.31	-70.7	-70.8	8.17	-59.57
3	7331.25 PK	59.4	74	-14.6	-46.94	-47.14	8.17	-35.86
4	7339.06 AV	37.62	54	-16.38	-68.66	-68.98	8.17	-57.64
5	11014.06 PK	60.26	74	-13.74	-46.04	-46.32	8.17	-35
6	11007.81 AV	38.64	54	-15.36	-67.43	-68.2	8.17	-56.62
7	16546.06 PK	52.68	68.2	-15.52	-53.56	-53.97	8.17	-42.58


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

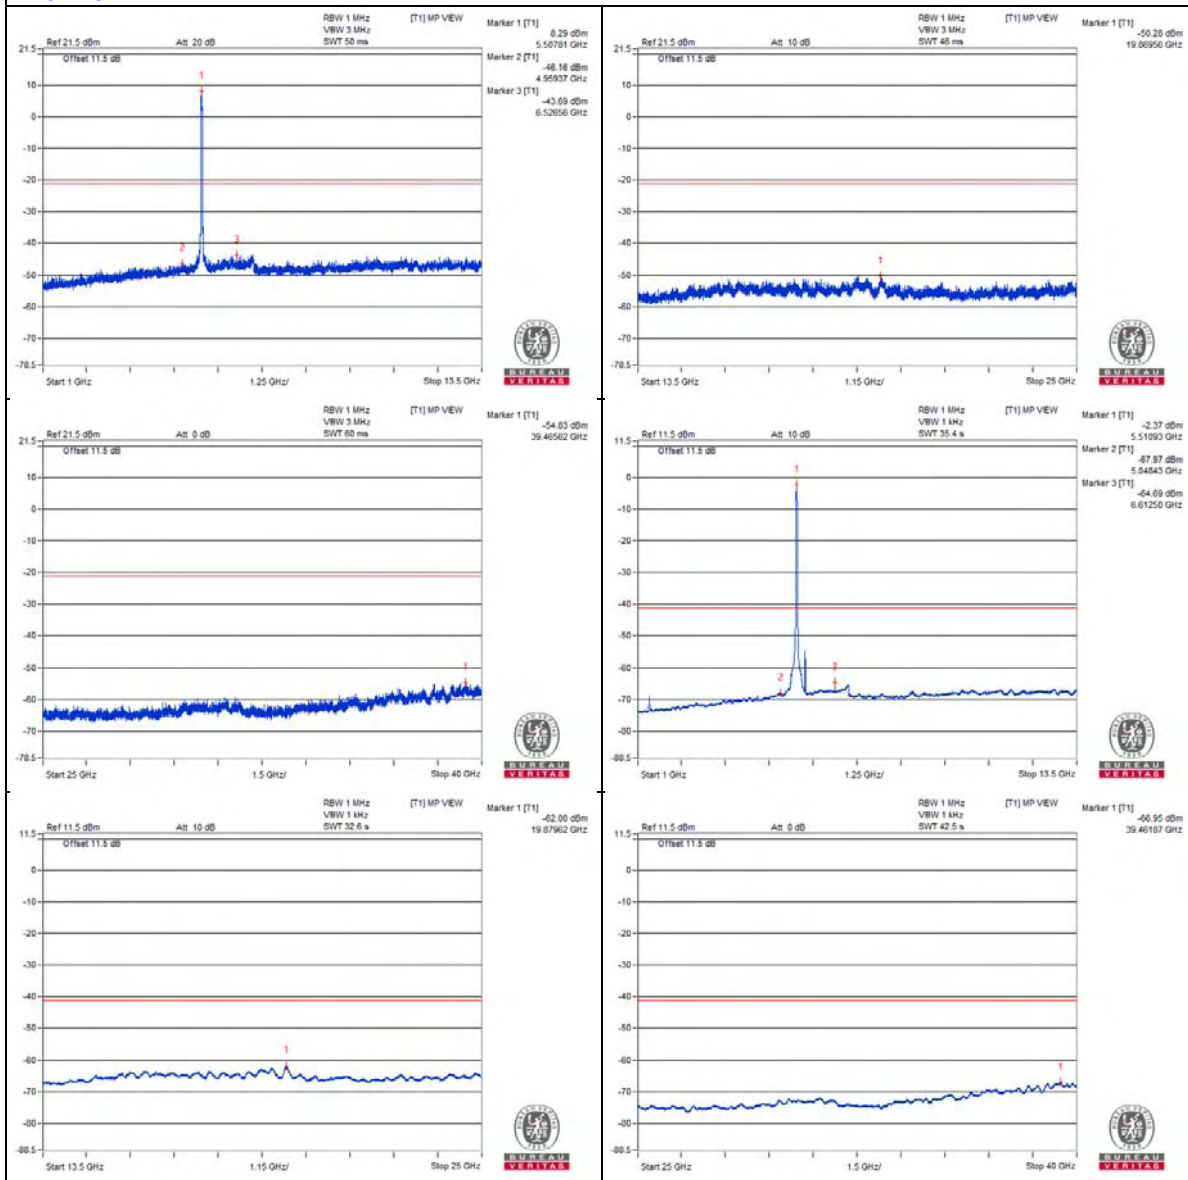

Chain 1

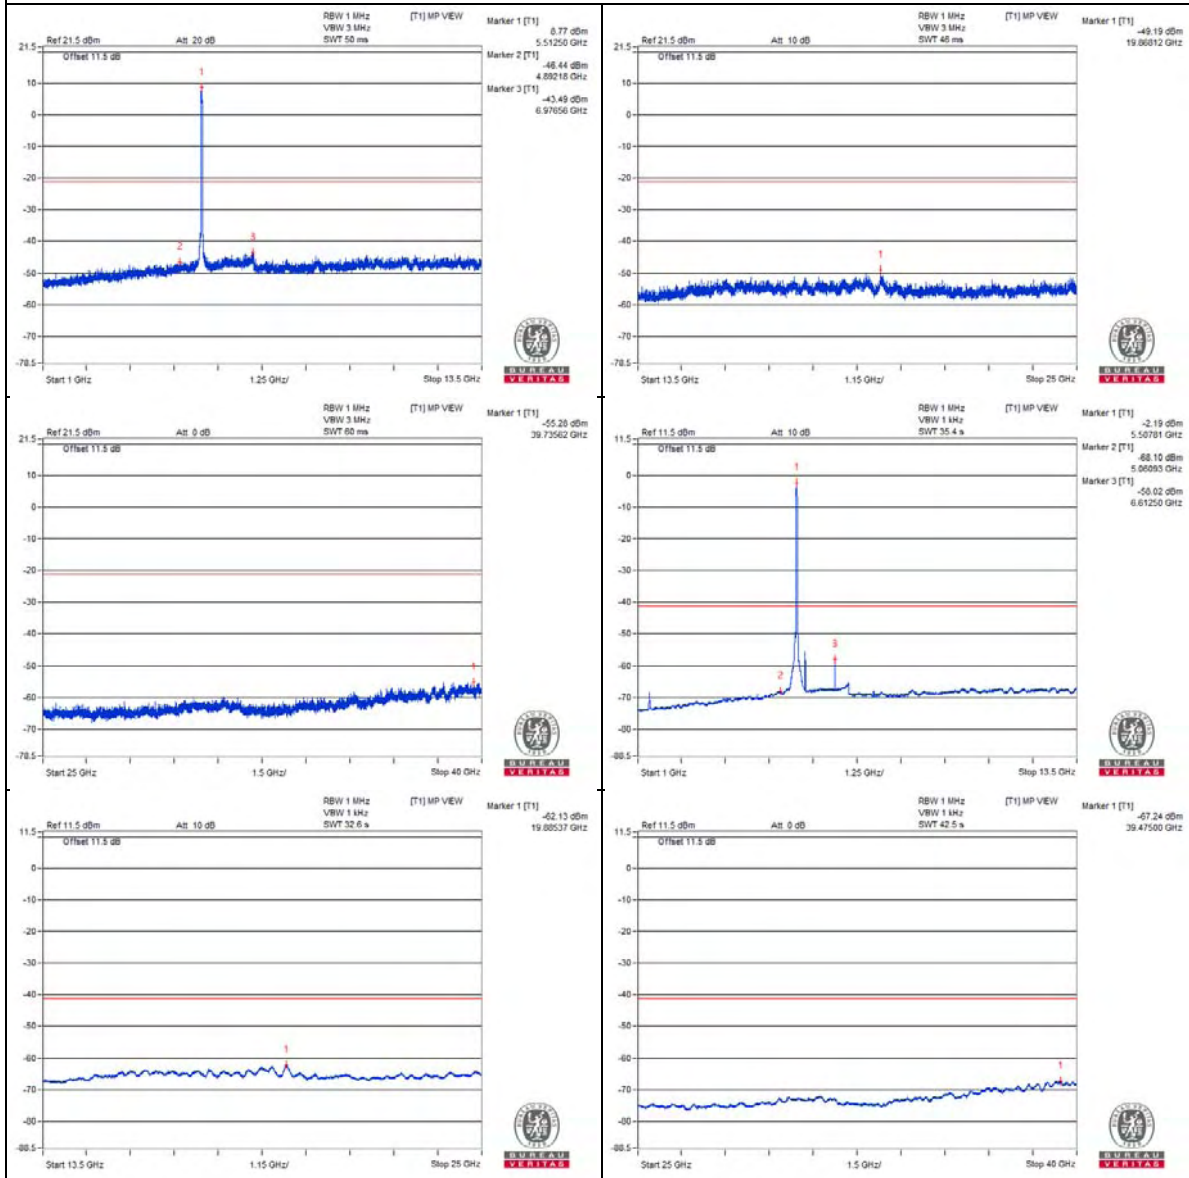

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5459.5 PK	68.31	74	-5.69	-41.52	-35.8	7.82	-26.95
2	5460 AV	52.77	54	-1.23	-54.84	-52.2	7.82	-42.49
3	5468.34 PK	70.5	68.2	*2.3	-37.61	-34.22	7.82	-24.76


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

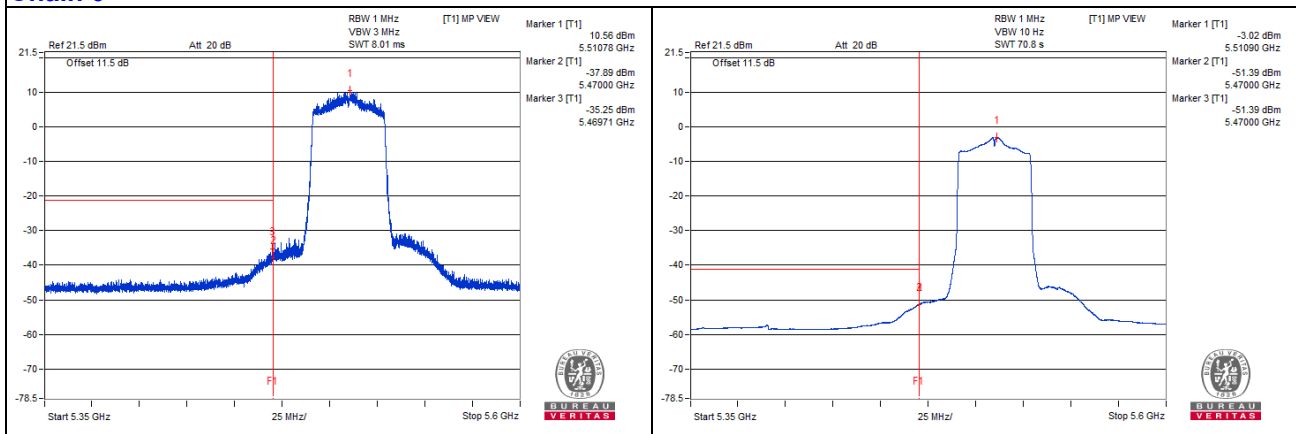

Chain 1

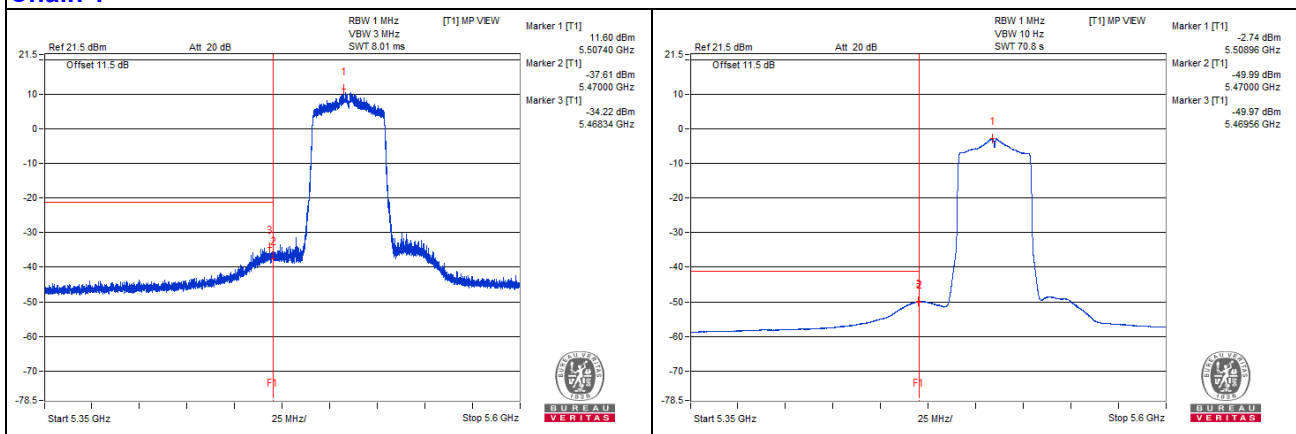

802.11ax (HE40) - Channel 110


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3714.06 PK	57.27	74	-16.73	-48.89	-49.46	8.17	-37.99
2	3707.81 AV	35.98	54	-18.02	-70.56	-70.36	8.17	-59.28
3	7401.56 PK	58.91	74	-15.09	-46.89	-48.27	8.17	-36.35
4	7385.93 AV	37.42	54	-16.58	-69.13	-68.92	8.17	-57.84
5	11093.75 PK	60	74	-14	-46.03	-46.89	8.17	-35.26
6	11103.12 AV	38.85	54	-15.15	-67.83	-67.37	8.17	-56.41
7	16659.62 PK	52.51	68.2	-15.69	-53.56	-54.33	8.17	-42.75


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

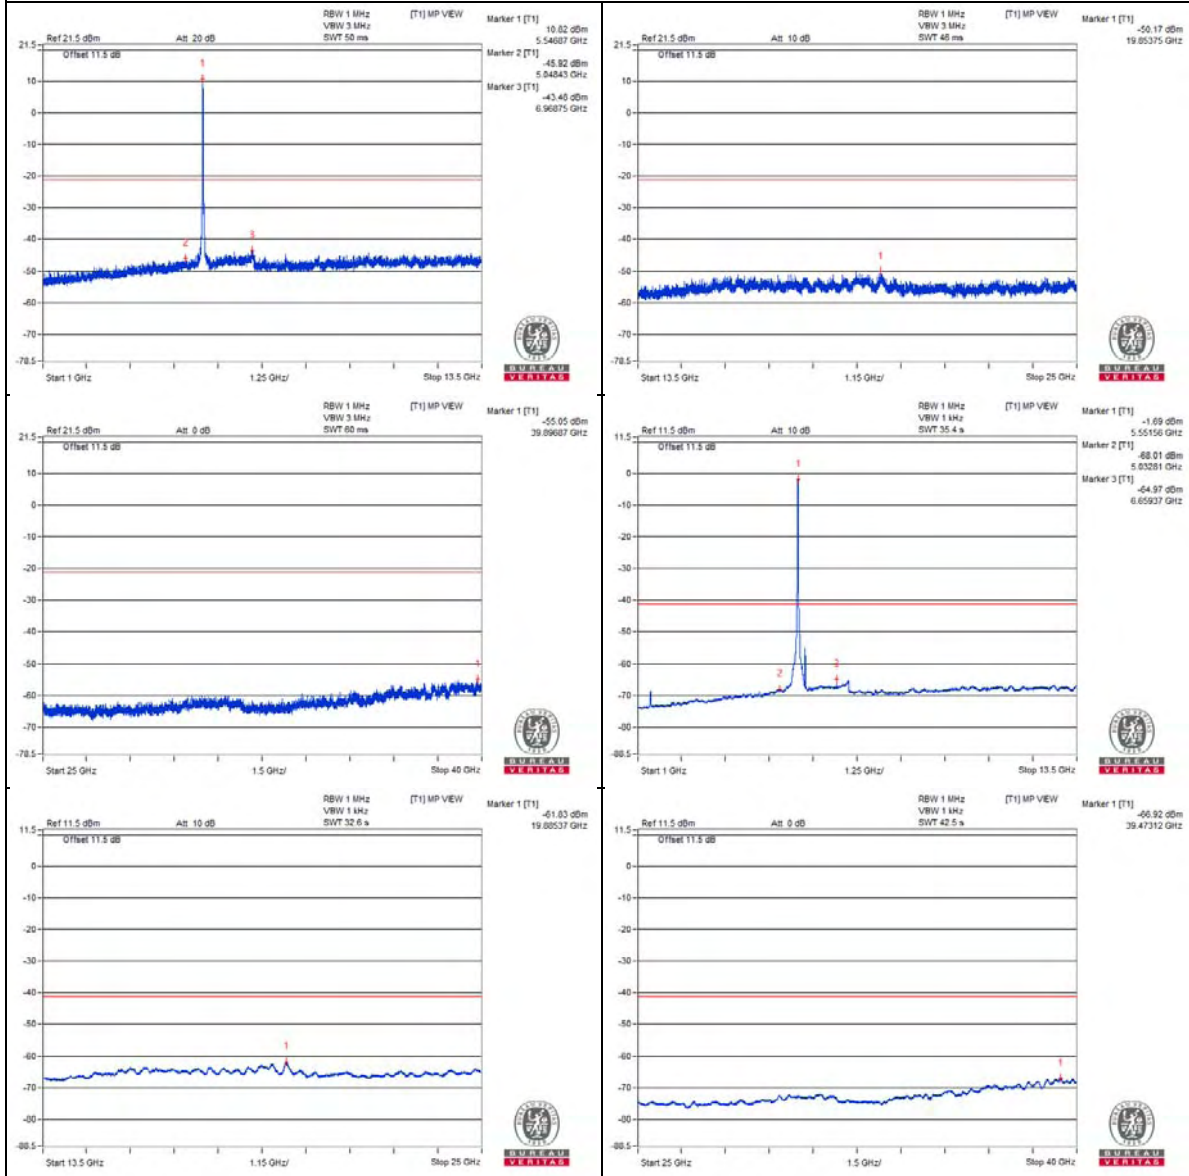

Chain 1

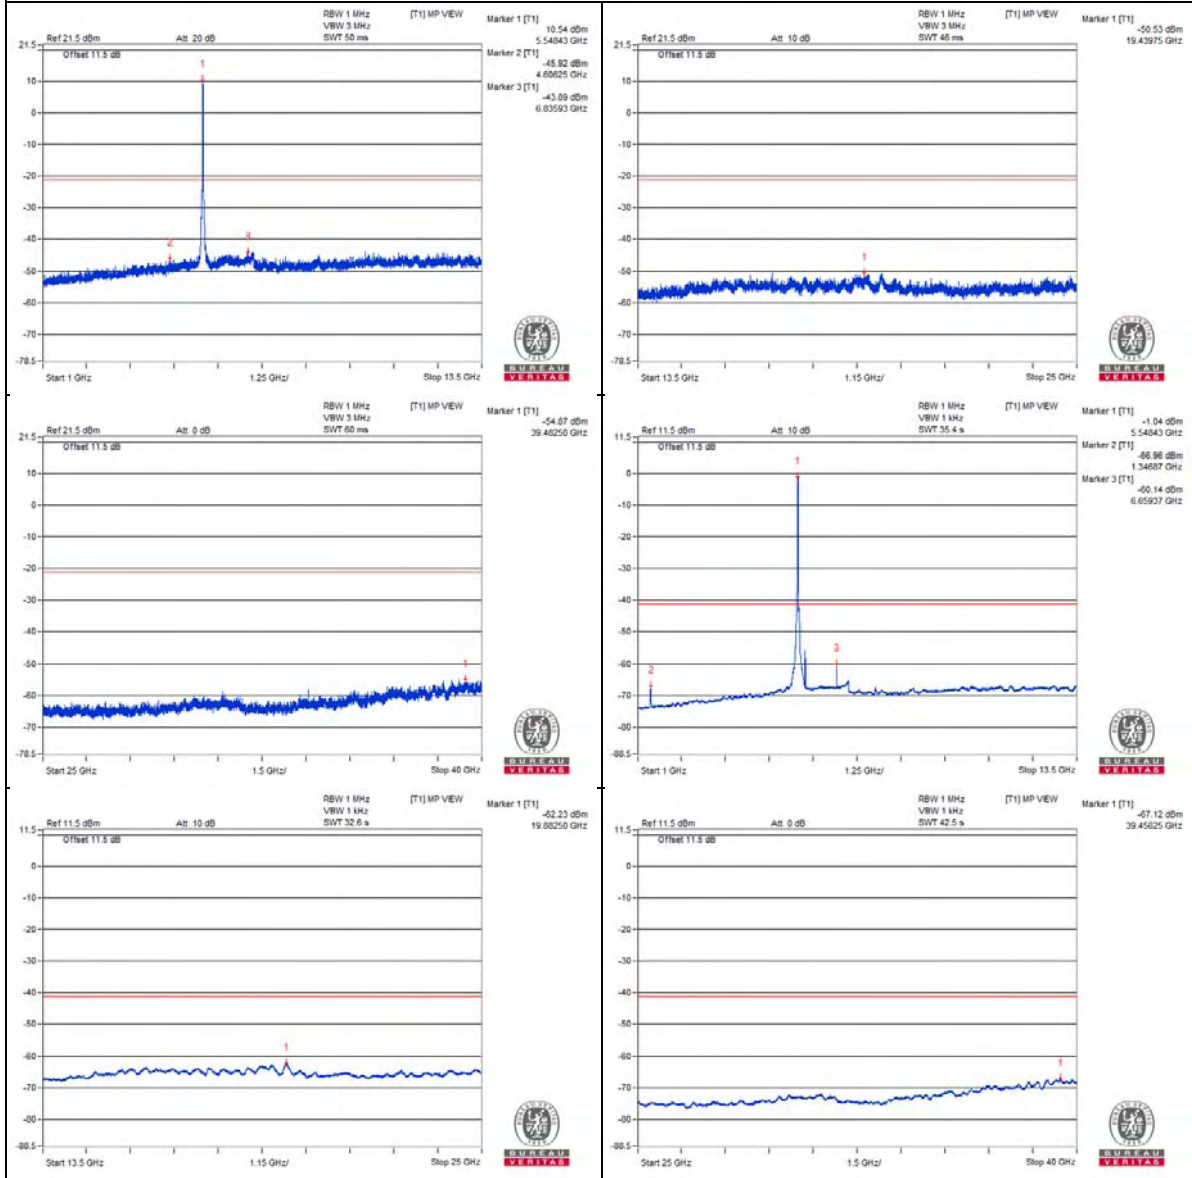

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5450.28 PK	62.22	74	-11.78	-44.12	-43.63	7.82	-33.04
2	5459.96 AV	49	54	-5	-57.15	-57.04	7.82	-46.26
3	5466.9 PK	63.09	68.2	-5.11	-44.77	-41.74	7.82	-32.17

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

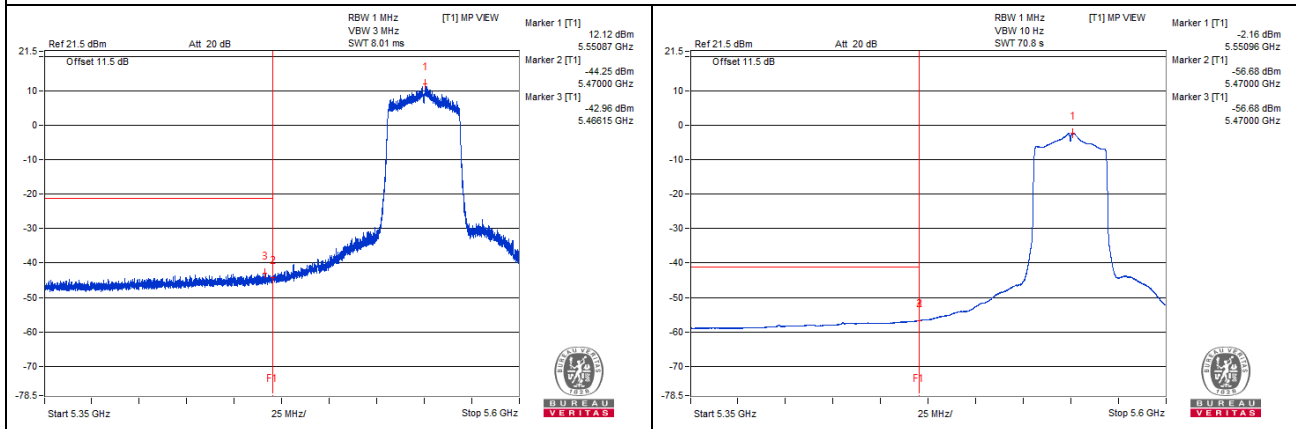

Chain 1

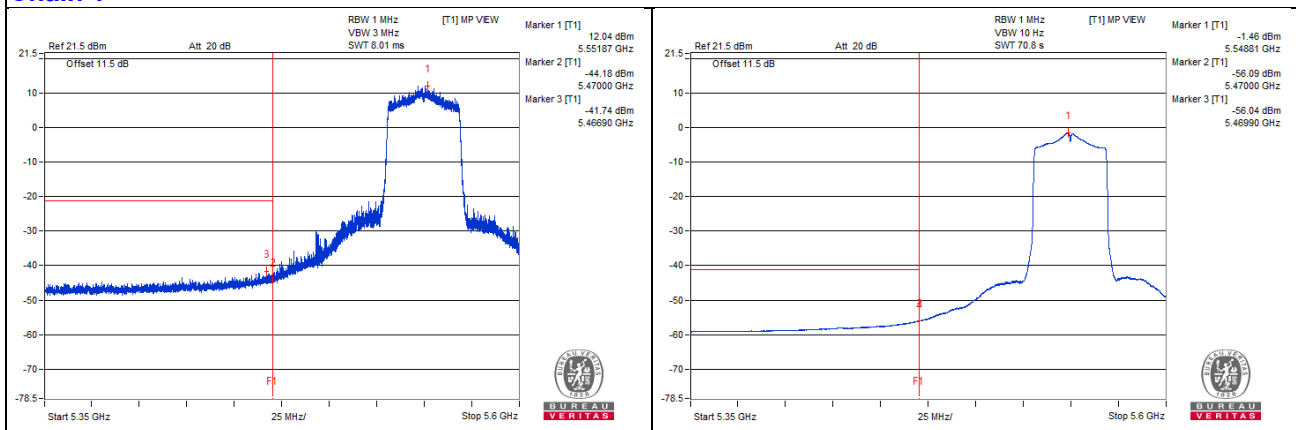

802.11ax (HE40) - Channel 134


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3781.25 PK	57.97	74	-16.03	-47.74	-49.36	8.17	-37.29
2	3778.12 AV	36.12	54	-17.88	-70.25	-70.4	8.17	-59.14
3	7560.93 PK	59.54	74	-14.46	-46.68	-47.14	8.17	-35.72
4	7559.37 AV	37.46	54	-16.54	-68.89	-69.07	8.17	-57.8
5	11342.18 PK	60.85	74	-13.15	-44.9	-46.4	8.17	-34.41
6	11350 AV	39.44	54	-14.56	-67.14	-66.87	8.17	-55.82
7	17014.68 PK	52.69	68.2	-15.51	-53.44	-54.09	8.17	-42.57


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

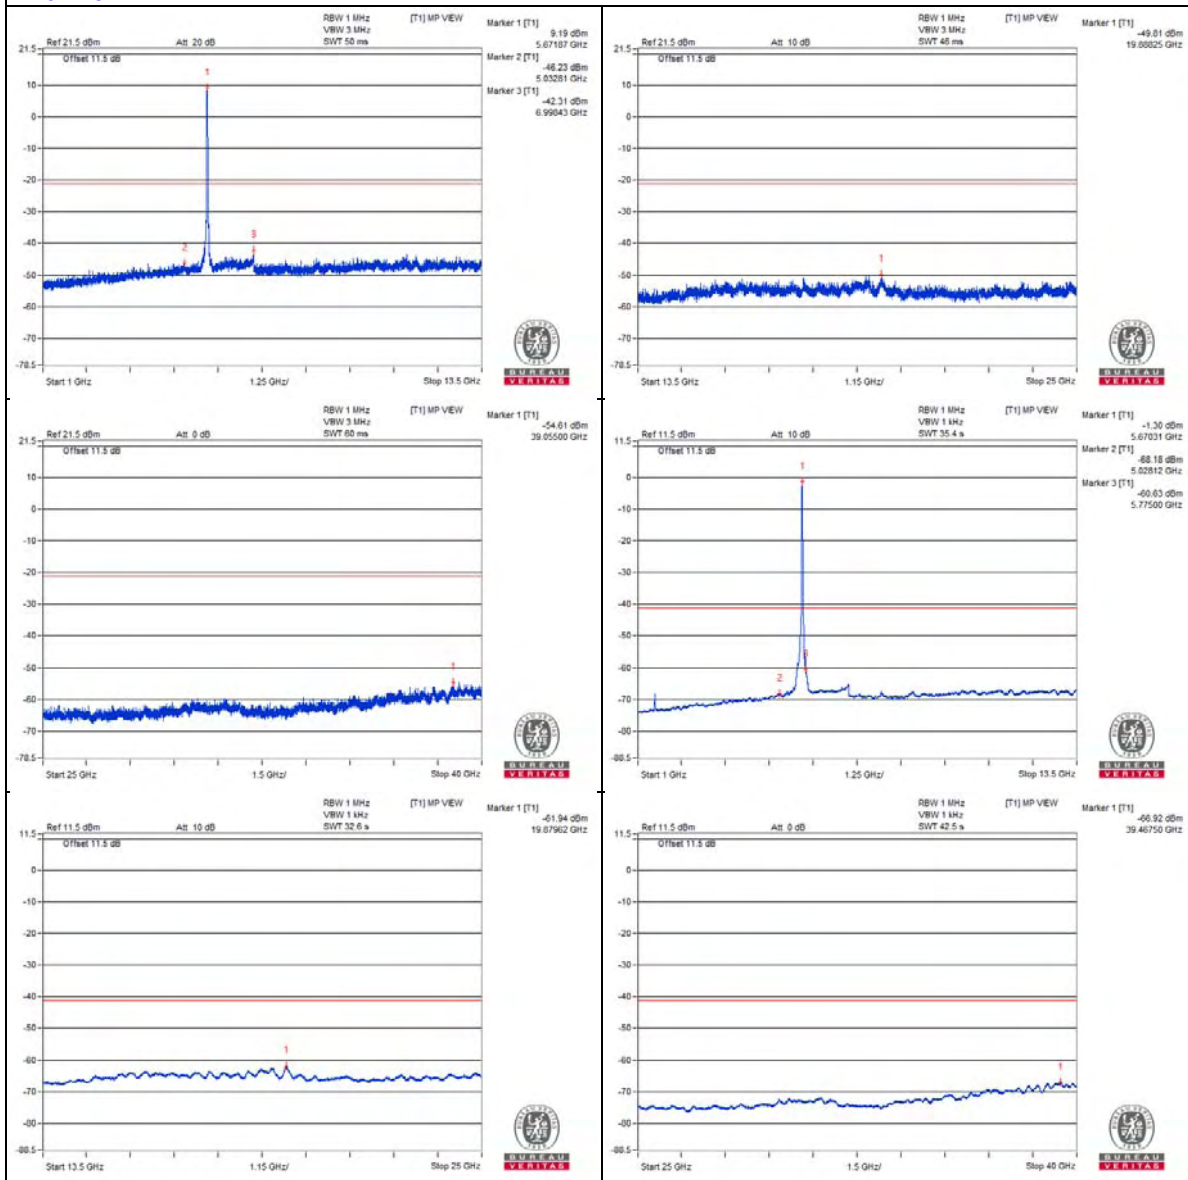

Chain 1

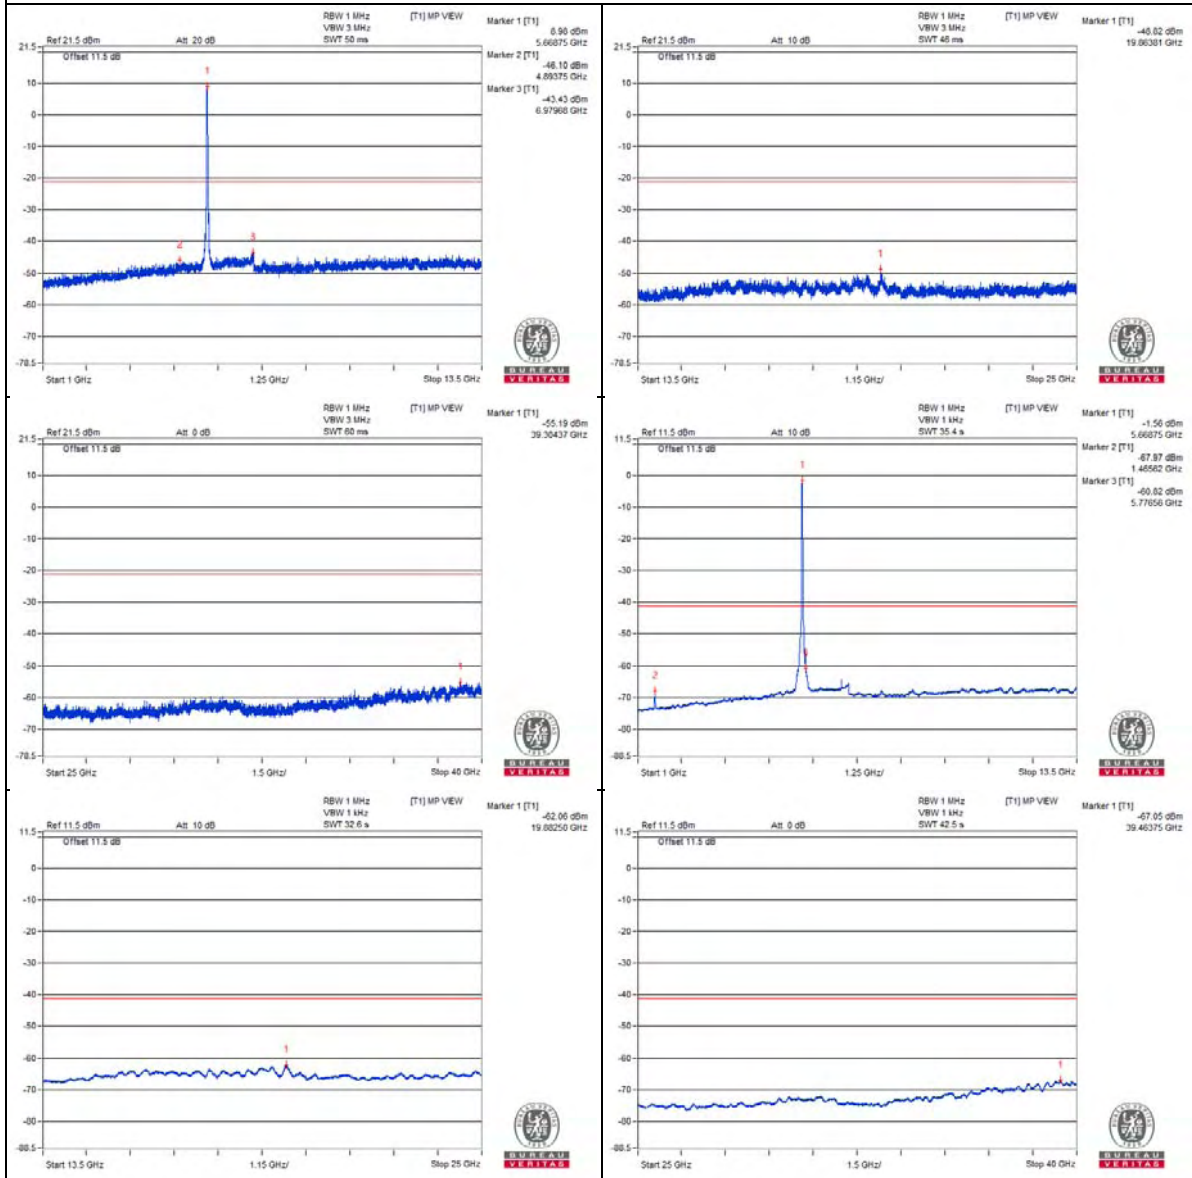

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5729.37 PK	69.22	68.2	*1.02	-42.68	-34.47	7.82	-26.04


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

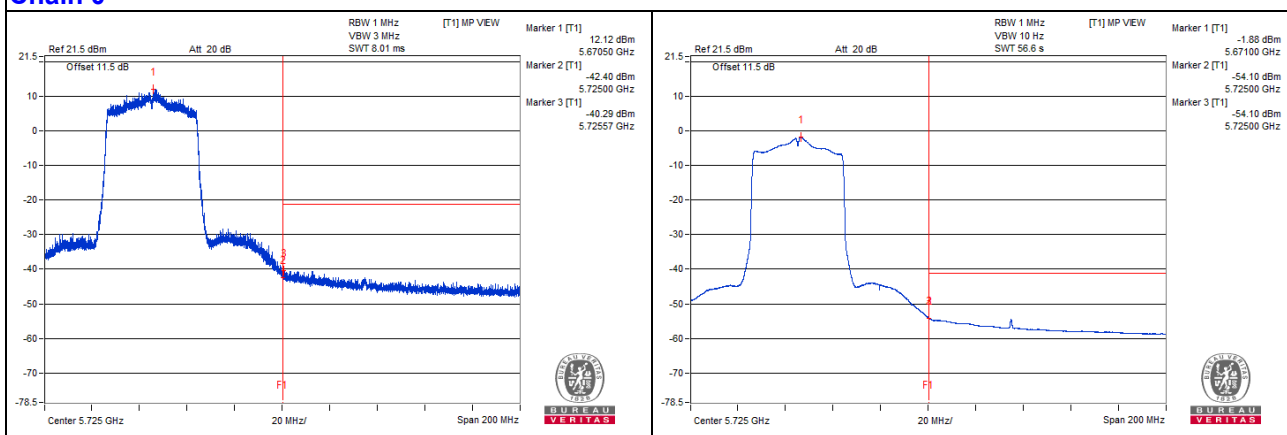

Chain 1

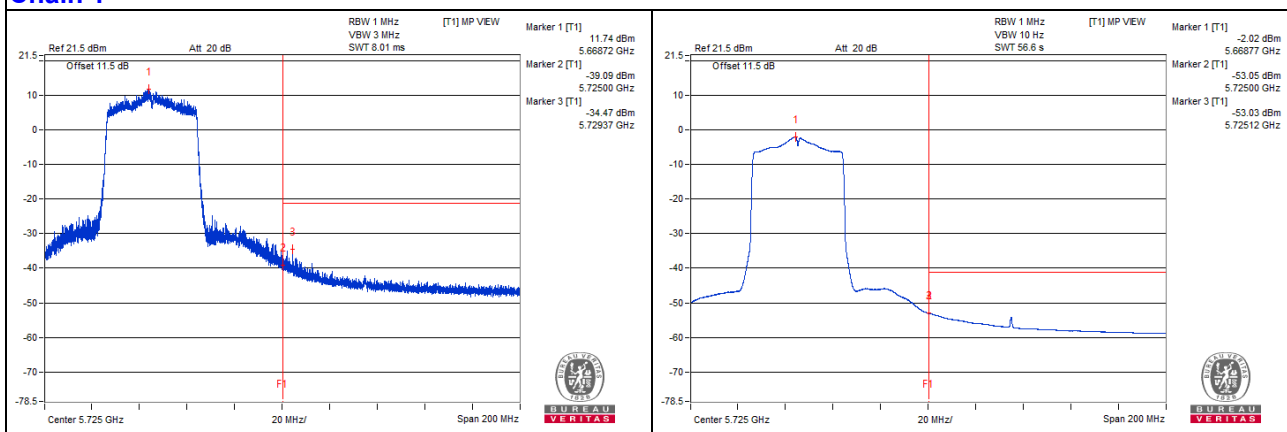

802.11ax (HE40) - Channel 142


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3821.87 PK	57.4	74	-16.6	-49.31	-48.79	8.17	-37.86
2	3804.68 AV	36.09	54	-17.91	-70.31	-70.39	8.17	-59.17
3	7612.5 PK	58.81	74	-15.19	-46.82	-48.62	8.17	-36.45
4	7595.31 AV	37.46	54	-16.54	-68.87	-69.09	8.17	-57.8
5	11403.12 PK	60.9	74	-13.1	-46.99	-44.46	8.17	-34.36
6	11410.93 AV	38.87	54	-15.13	-67.89	-67.27	8.17	-56.39
7	17146.93 PK	53.5	68.2	-14.7	-51.97	-54.18	8.17	-41.76


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

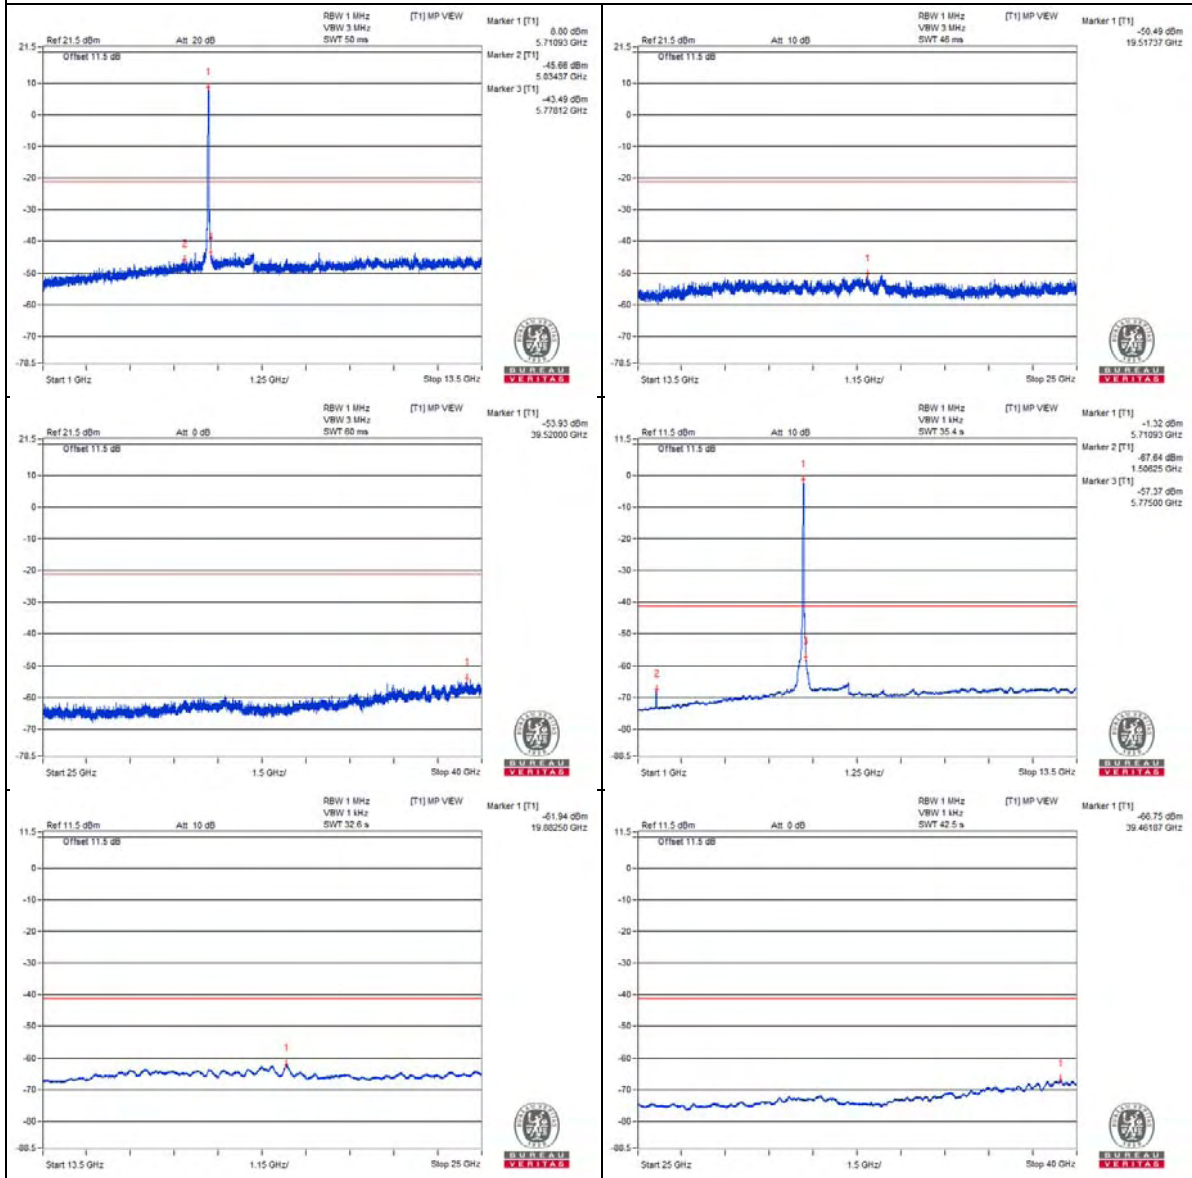

Chain 1

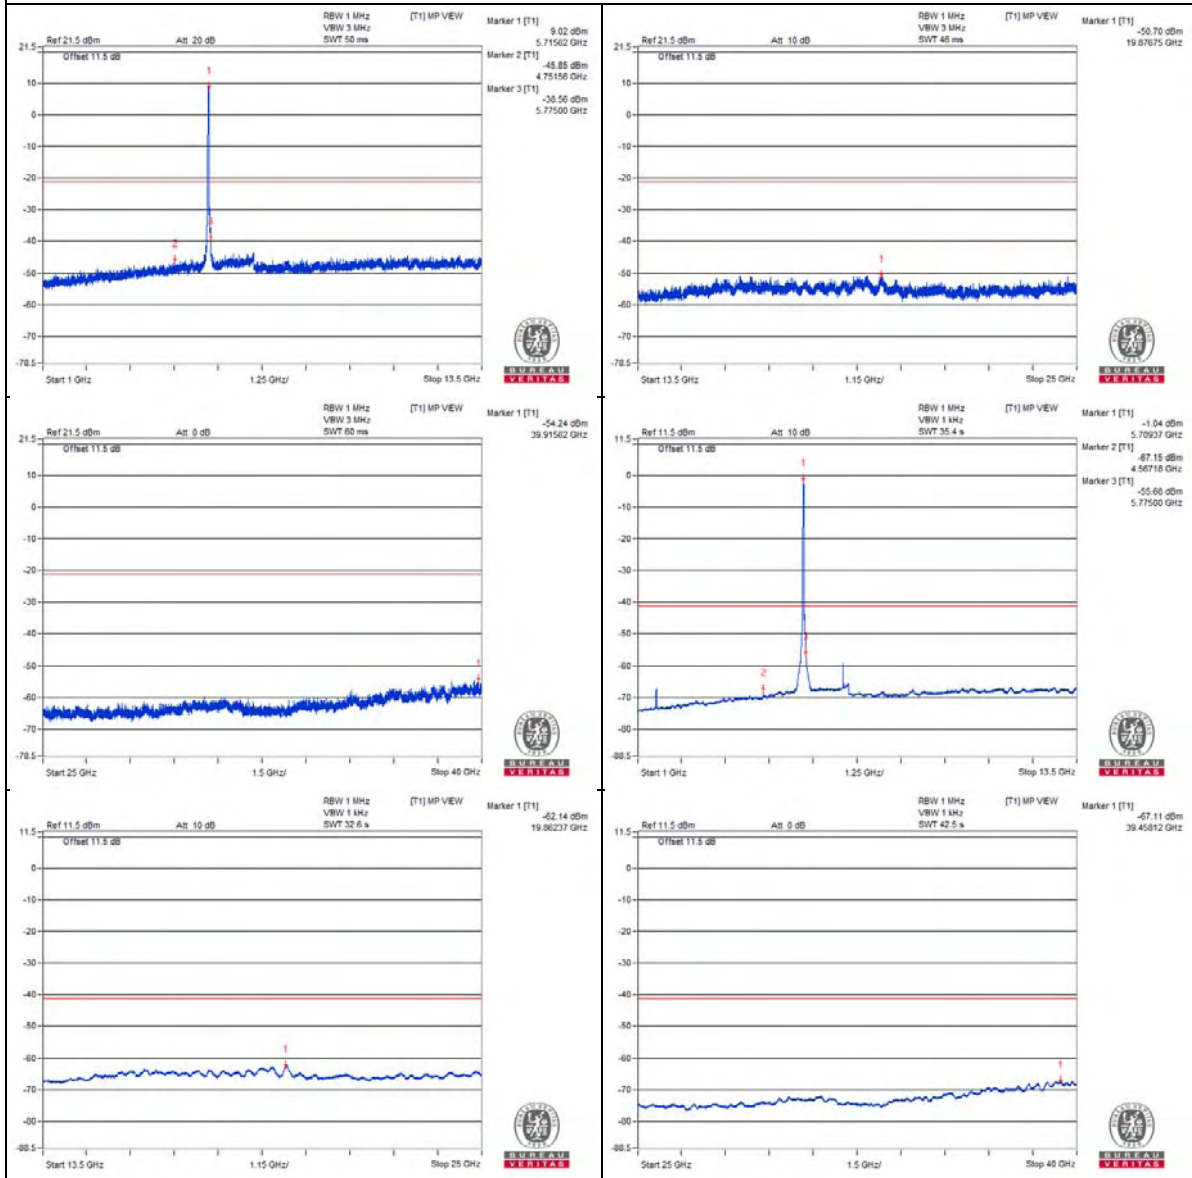

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5949.7 PK	60.75	68.2	-7.45	-46.76	-44.27	7.82	-34.51

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

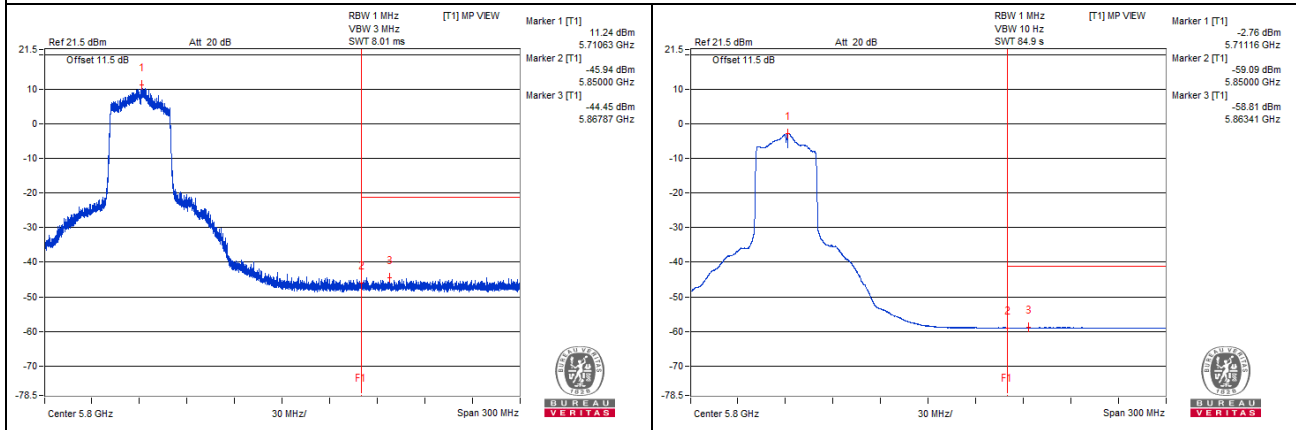

Chain 1

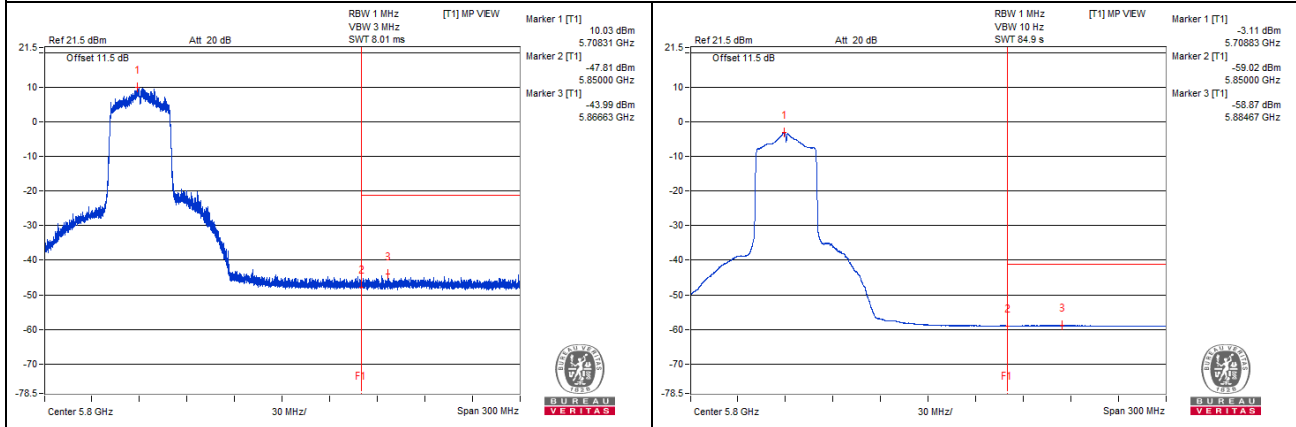

802.11ax (HE40) – Channel 151

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3854.68 PK	58.12	74	-15.88	-49.97	-47.13	8.17	-37.14
2	3856.25 AV	35.89	54	-18.11	-70.63	-70.48	8.17	-59.37
3	7659.37 PK	58.62	74	-15.38	-49.09	-46.84	8.17	-36.64
4	7654.68 AV	37.21	54	-16.79	-69.18	-69.29	8.17	-58.05
5	11523.43 PK	59.83	74	-14.17	-46.25	-47	8.17	-35.43
6	11500 AV	38.76	54	-15.24	-68.01	-67.38	8.17	-56.5
7	17250.43 PK	52.3	68.2	-15.9	-53.91	-54.38	8.17	-42.96


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

2. # : Non-restricted frequency, no limit for average emission.

Chain 0

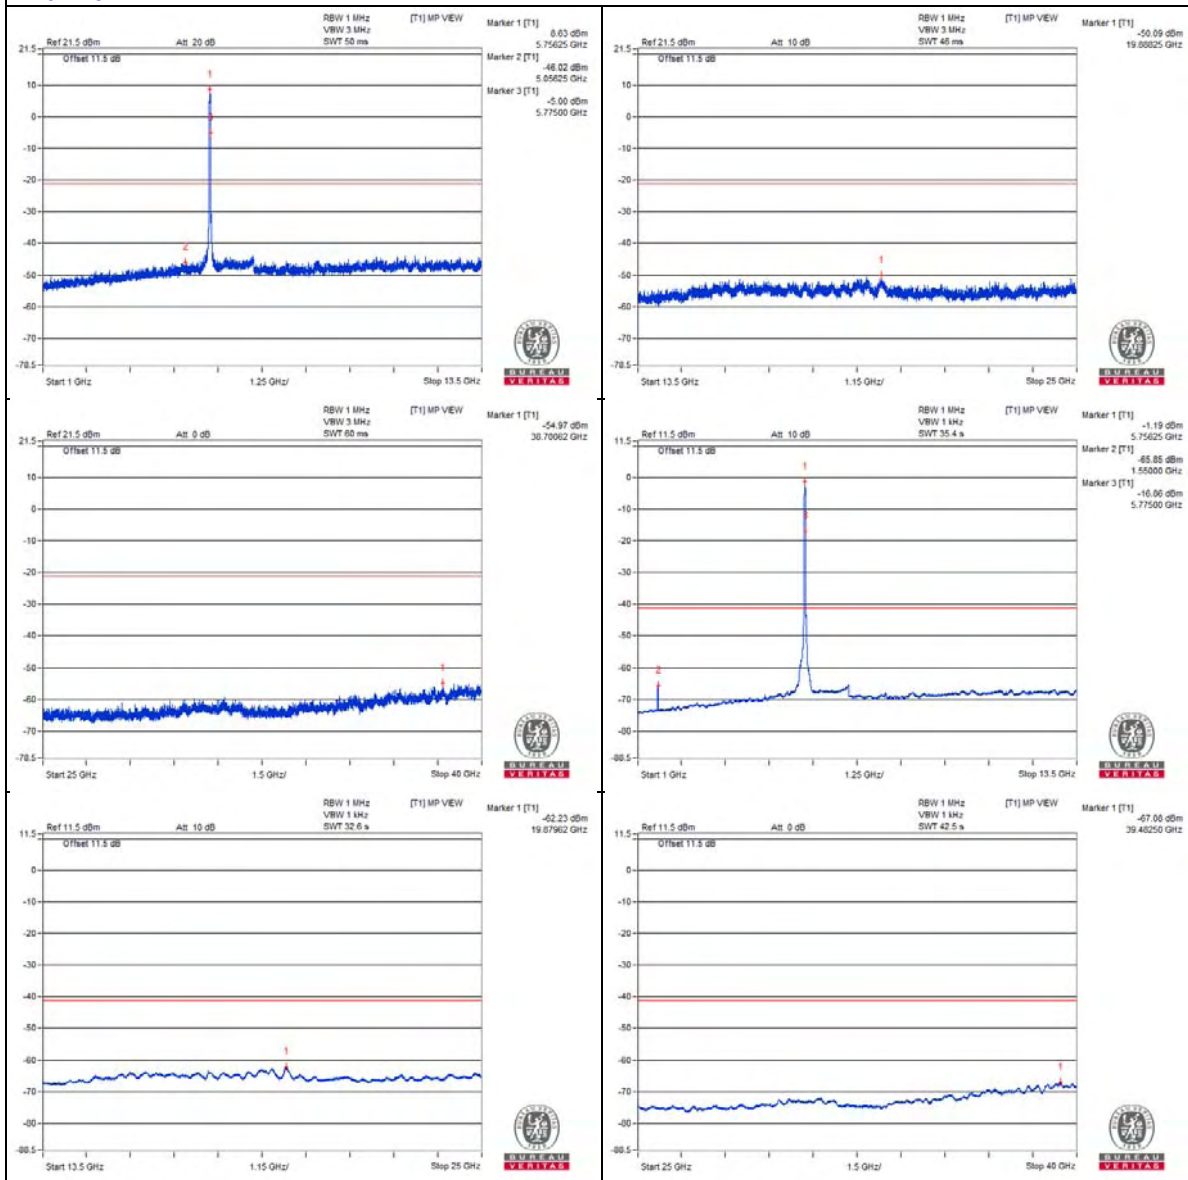


Chain 1

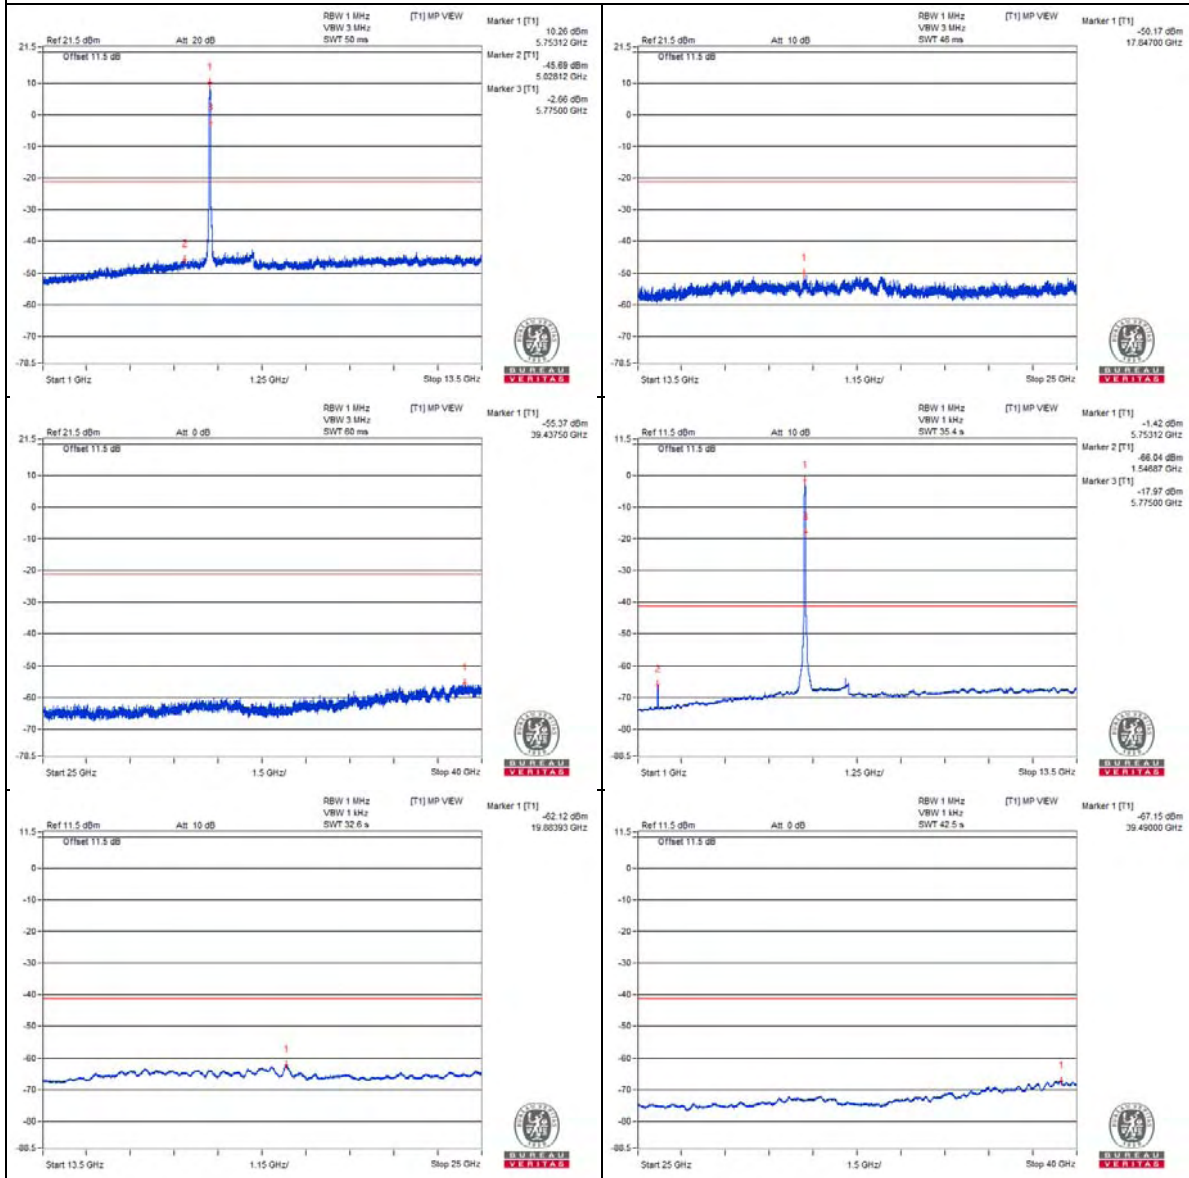


Bandedge table

Chain 0

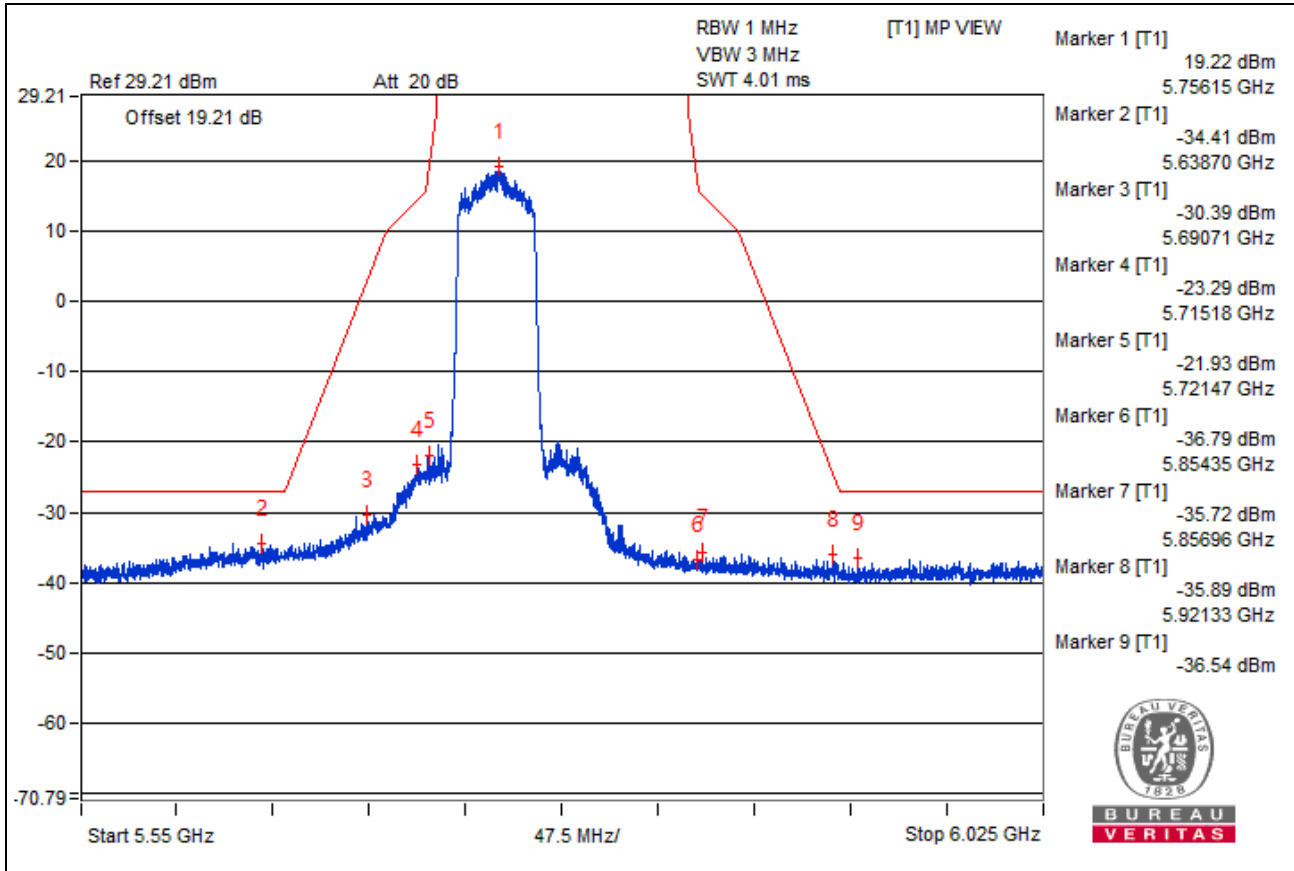

Chain 1

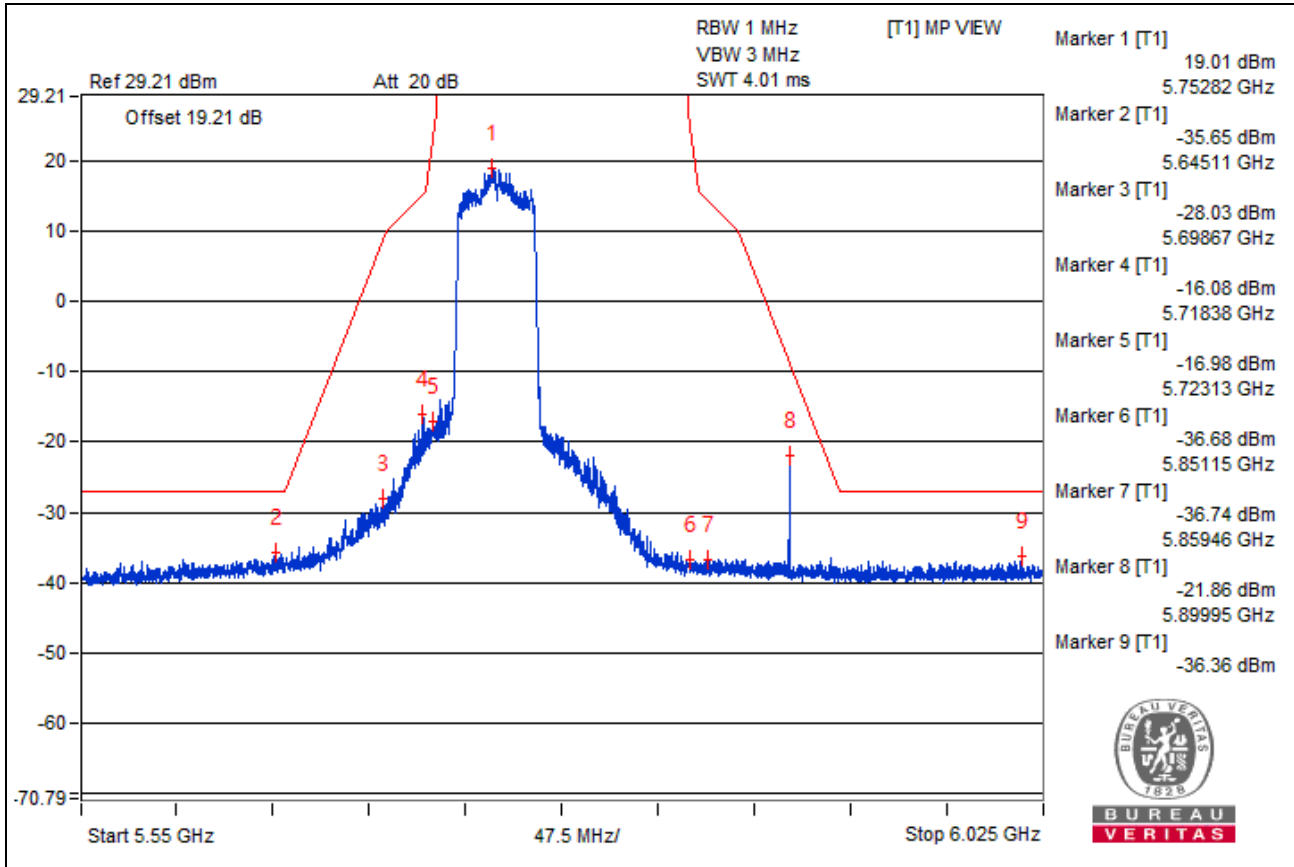

802.11ax (HE40) – Channel 159


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3864.06 PK	57.47	74	-16.53	-49.57	-48.45	8.17	-37.79
2	3865.62 AV	36.02	54	-17.98	-70.31	-70.53	8.17	-59.24
3	7728.12 PK	58.26	74	-15.74	-48.11	-48.25	8.17	-37
4	7745.31 AV	37.18	54	-16.82	-69.37	-69.16	8.17	-58.08
5	11607.81 PK	60.65	74	-13.35	-46.34	-45.31	8.17	-34.61
6	11598.43 AV	39.43	54	-14.57	-67.43	-66.63	8.17	-55.83
7	17404.25 PK	52.91	68.2	-15.29	-54.25	-52.91	8.17	-42.35


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

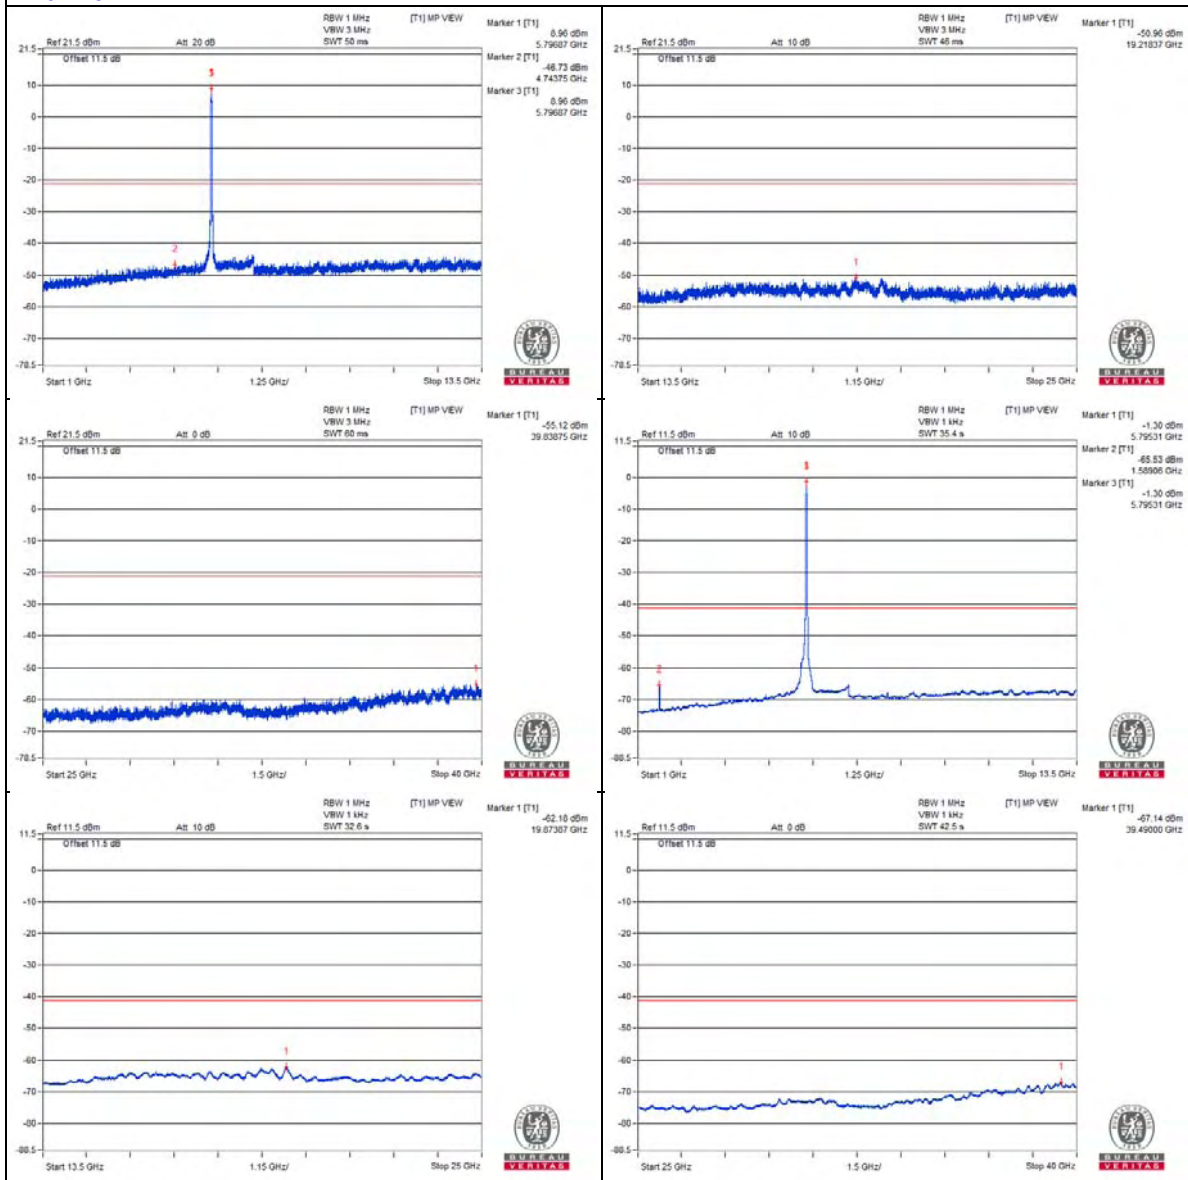


Chain 1

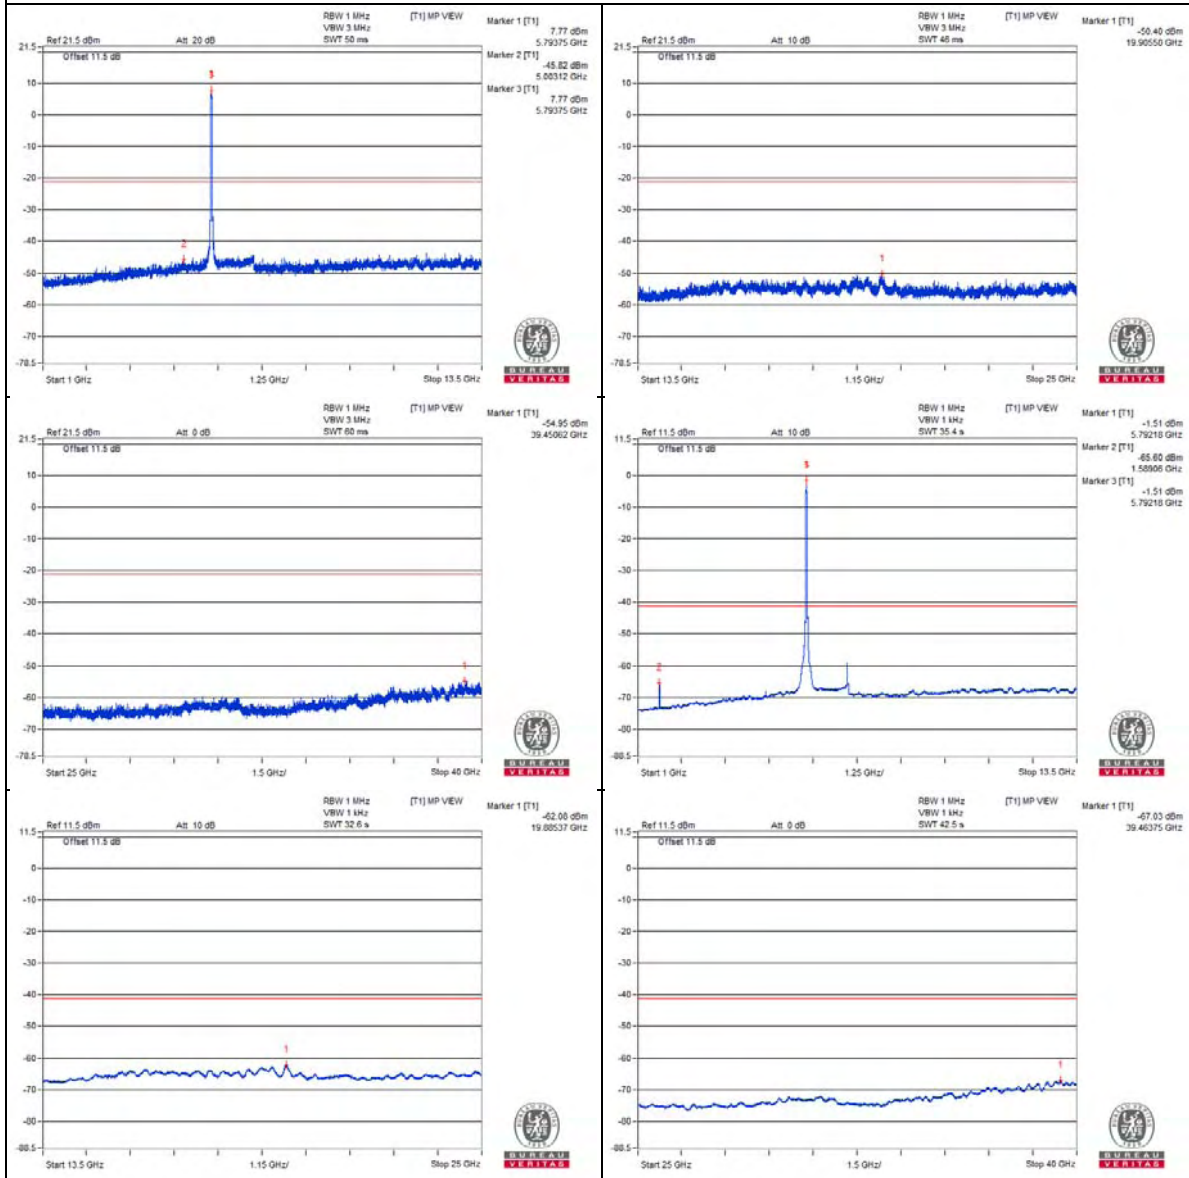


Bandedge table

Chain 0

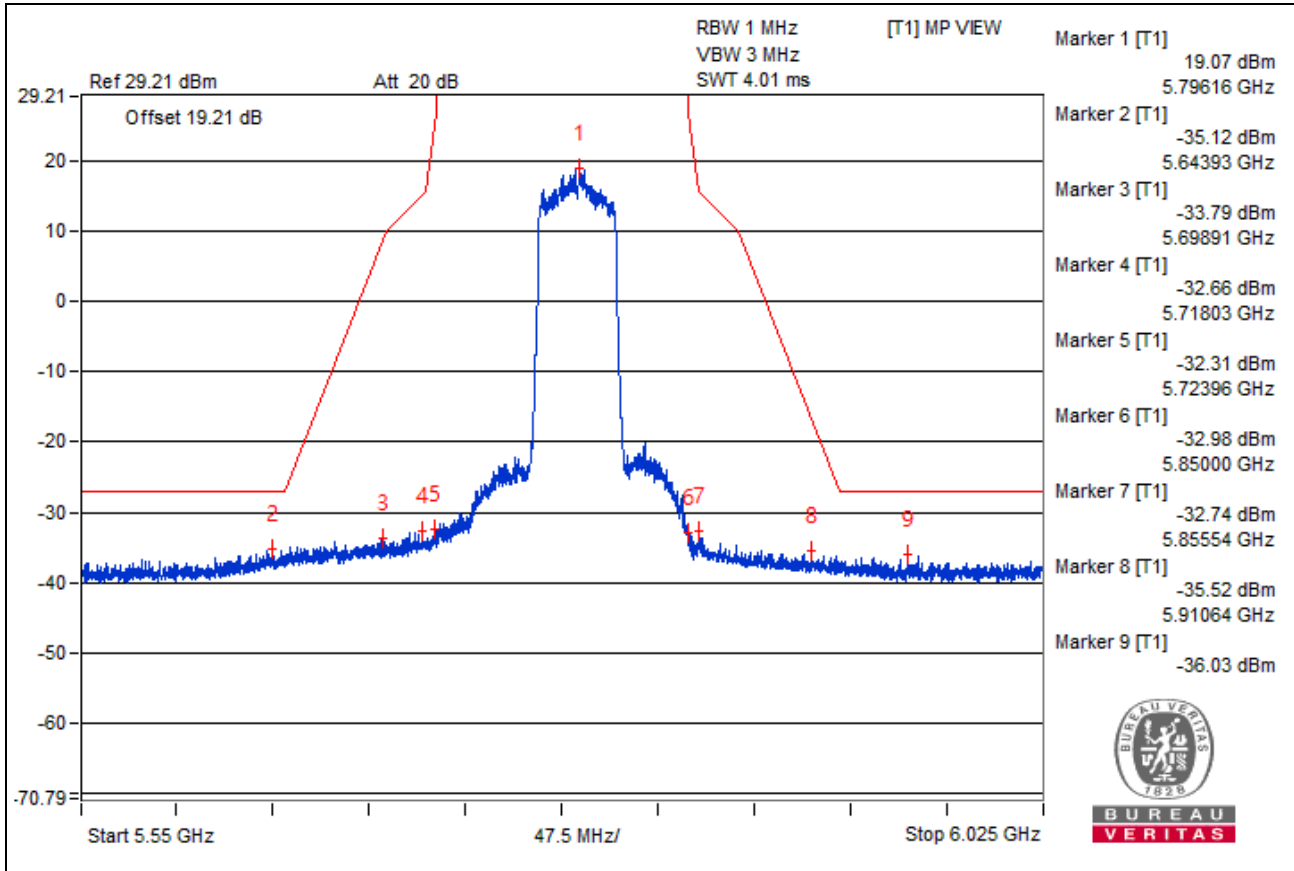

Chain 1

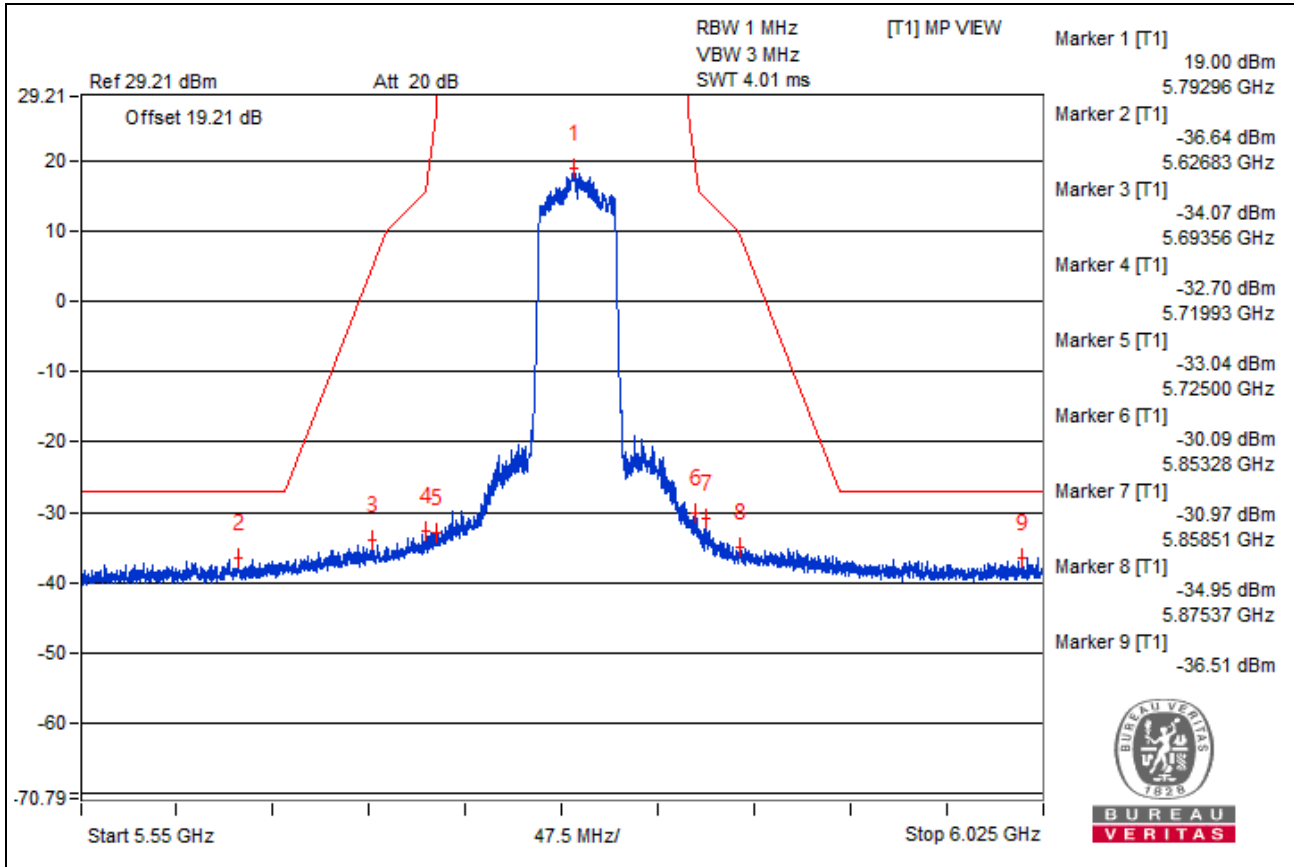

802.11ax (HE80) - Channel 42


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3490.62 PK	57.65	68.2	-10.55	-47.26	-51.19	8.17	-37.61
2	6946.87 PK	62.07	68.2	-6.13	-46.22	-43.07	8.17	-33.19
3	10435.93 PK	59.97	68.2	-8.23	-46.39	-46.55	8.17	-35.29
4	15627.5 PK	52.67	74	-21.33	-53.51	-54.05	8.17	-42.59
5	15637.56 AV	41.44	54	-12.56	-64.8	-65.21	8.17	-53.82


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

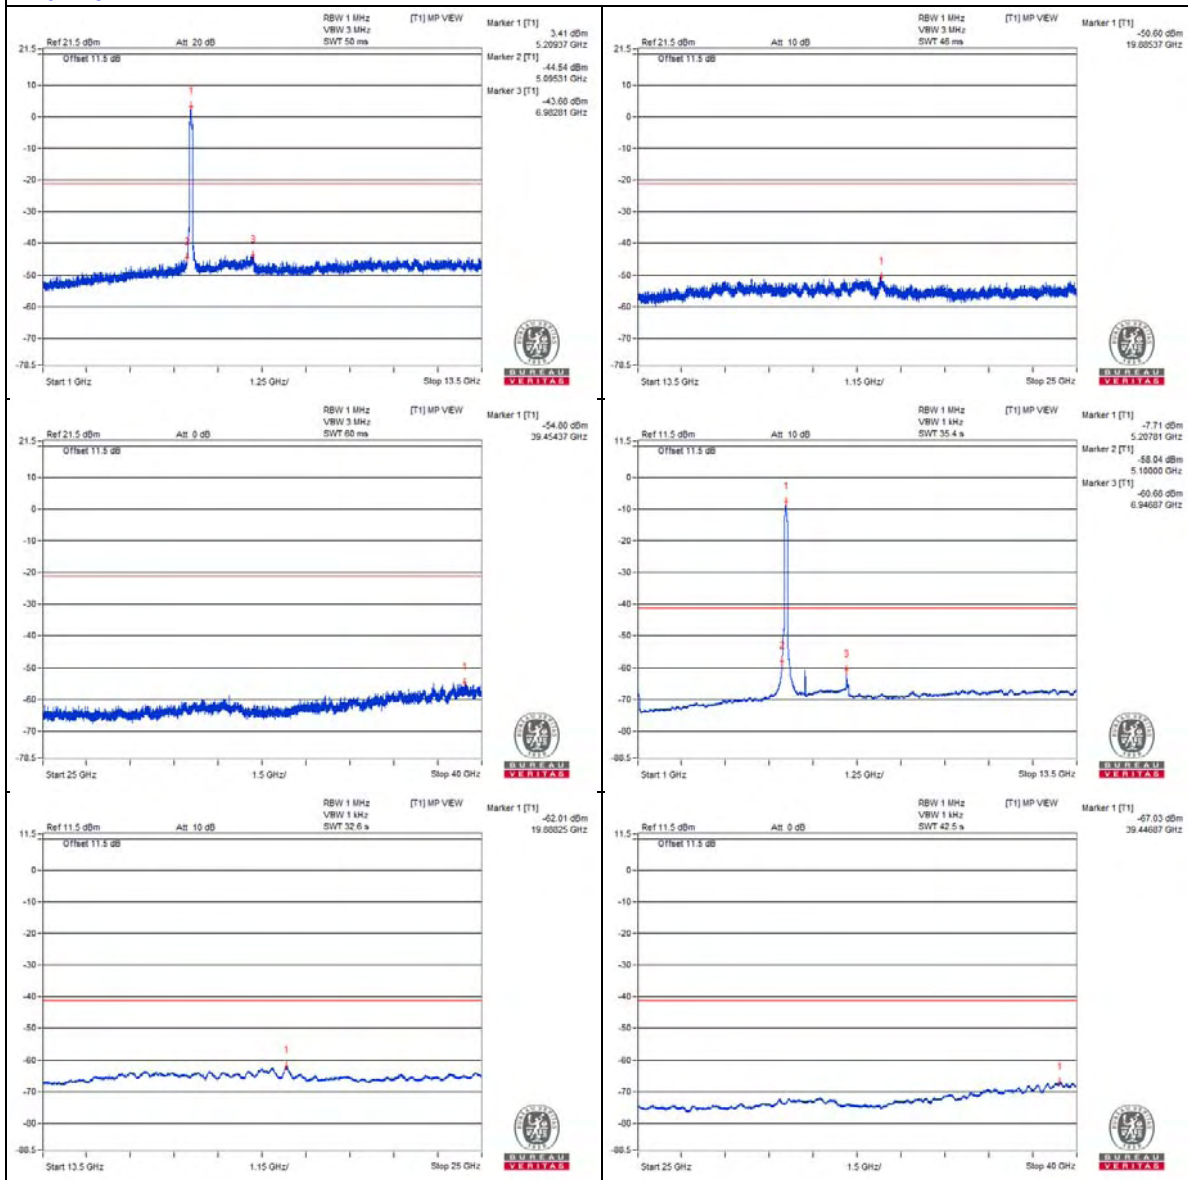

Chain 1

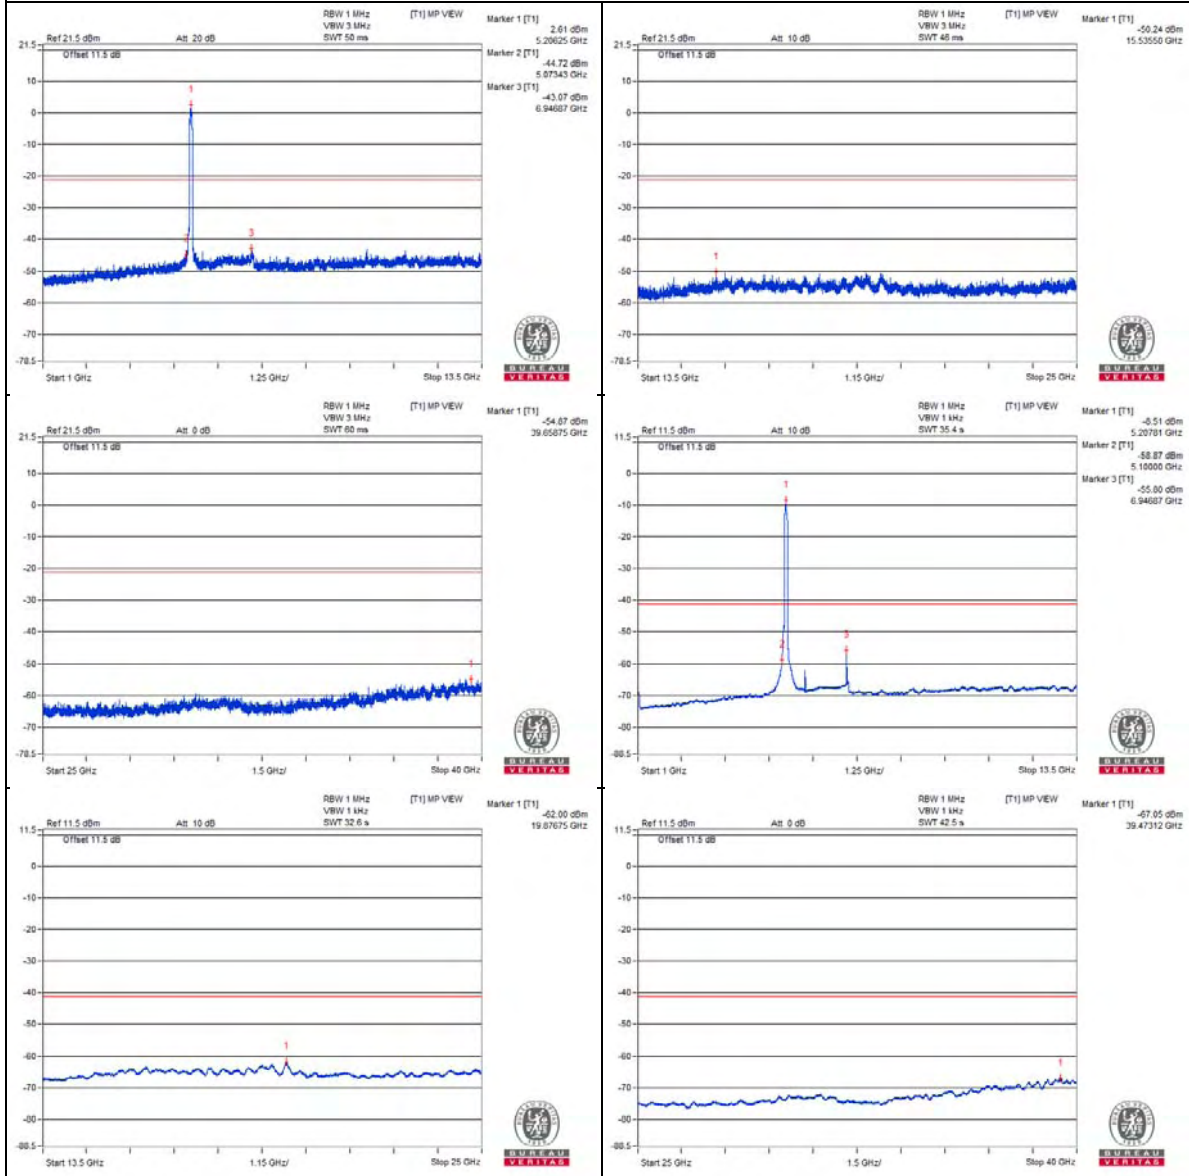

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5147.07 PK	69.88	74	-4.12	-35.18	-34.36	6.36	-25.38
2	5147.85 AV	56.09	54	! 2.09	-48.34	-48.74	6.36	-39.17

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

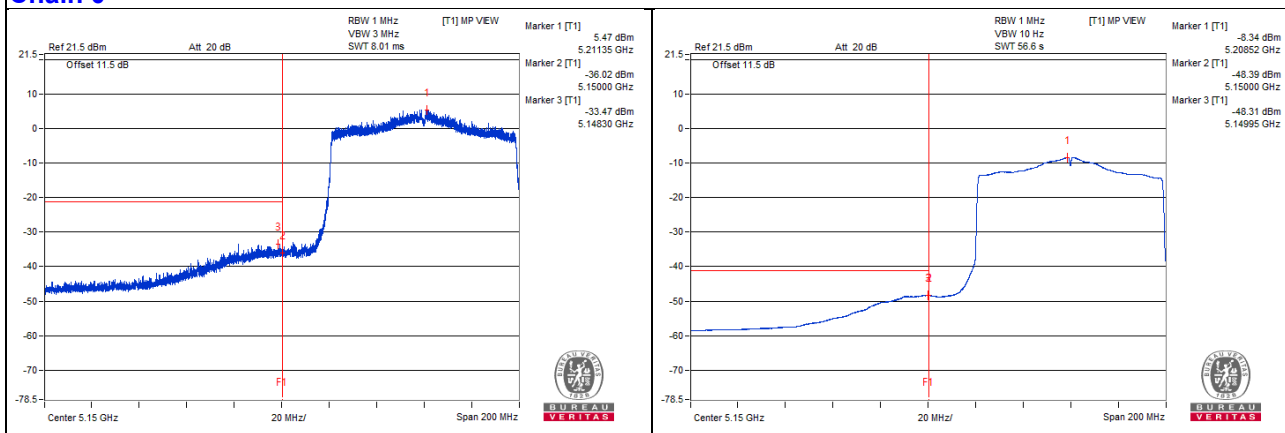

Chain 1

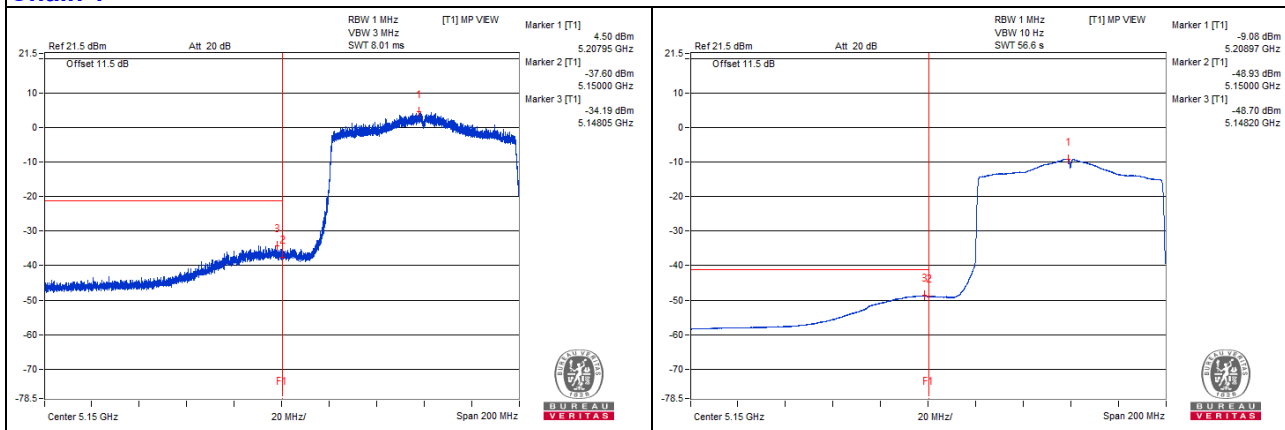

802.11ax (HE80) - Channel 58

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3525 PK	57.15	74	-16.85	-48.95	-49.66	8.17	-38.11
2	3545.31 AV	35.71	54	-18.29	-70.62	-70.84	8.17	-59.55
3	7046.87 PK	59.45	68.2	-8.75	-46.82	-47.16	8.17	-35.81
4	10564.06 PK	60.55	68.2	-7.65	-45.52	-46.29	8.17	-34.71
5	15879.06 PK	53.77	74	-20.23	-53.87	-51.73	8.17	-41.49
6	15851.75 AV	42.17	54	-11.83	-64.13	-64.42	8.17	-53.09


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

2. # : Non-restricted frequency, no limit for average emission.

Chain 0

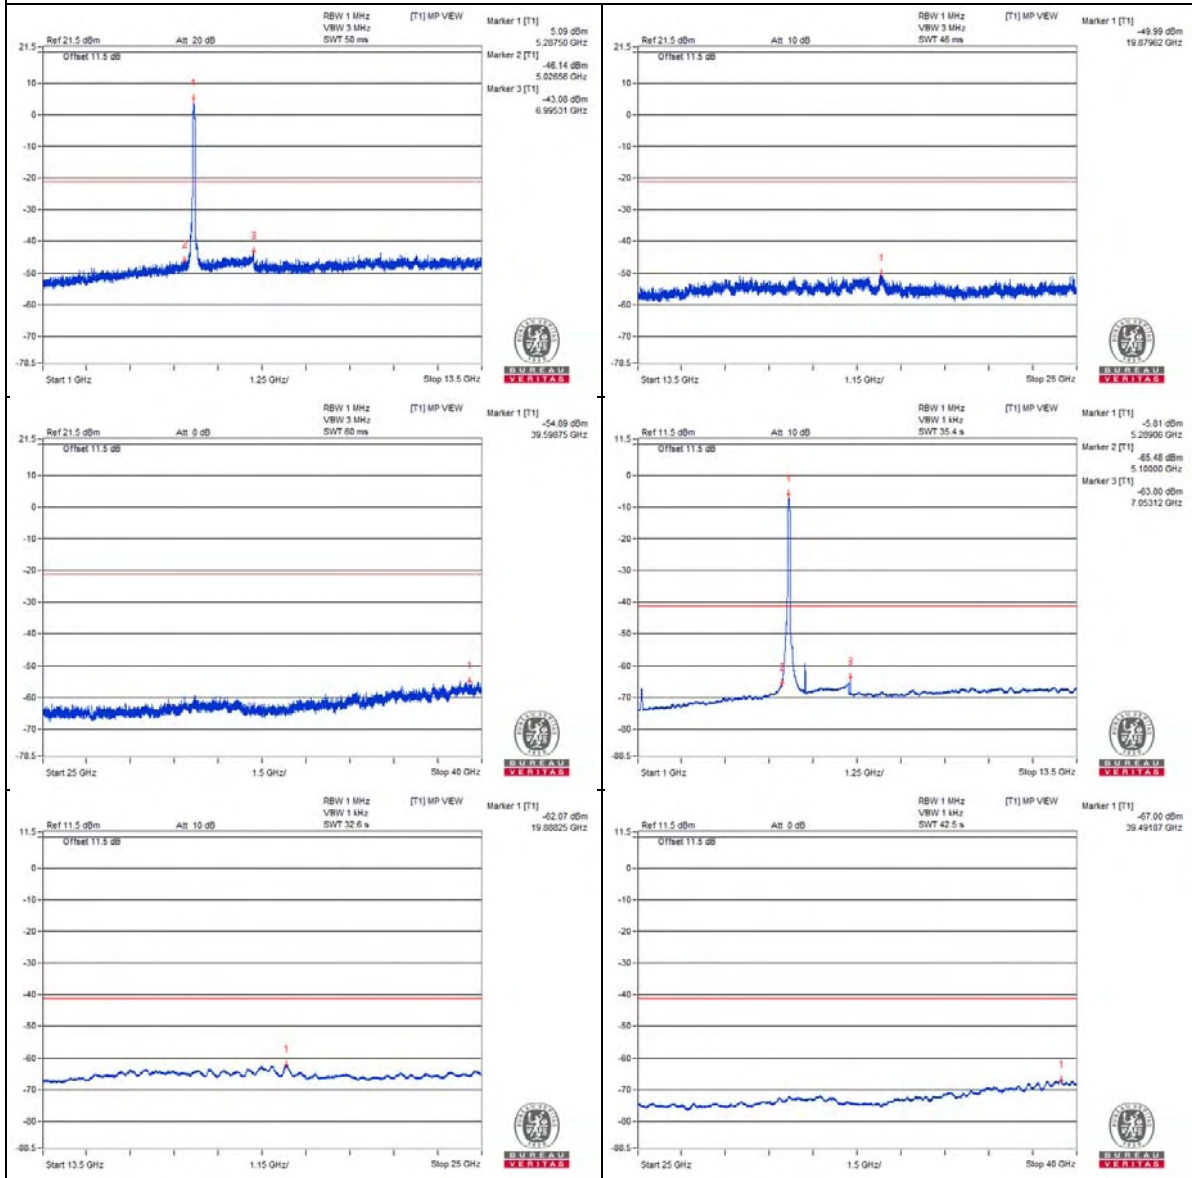

Chain 1

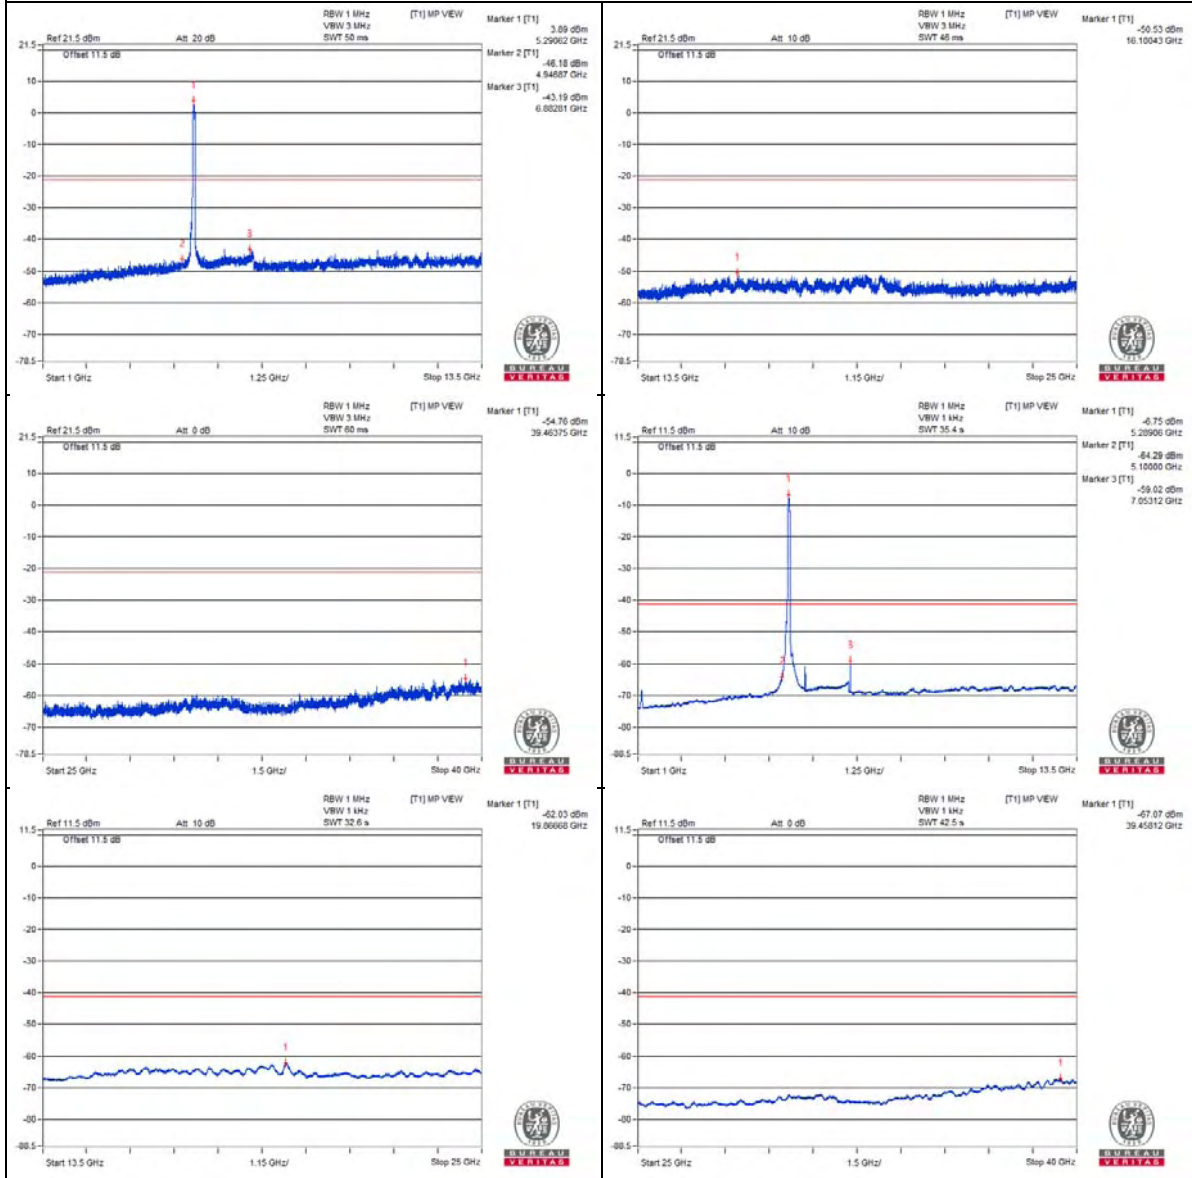

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5351 PK	79.4	74	*5.4	-24.15	-26.87	6.43	-15.86
2	5350.35 AV	65.51	54	*11.51	-38.86	-39.55	6.43	-29.75

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

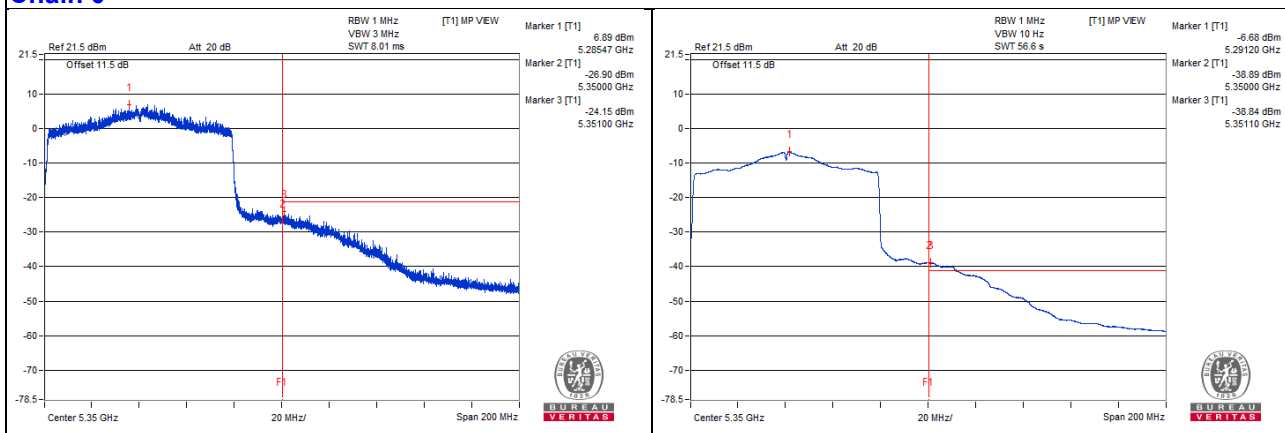

Chain 1

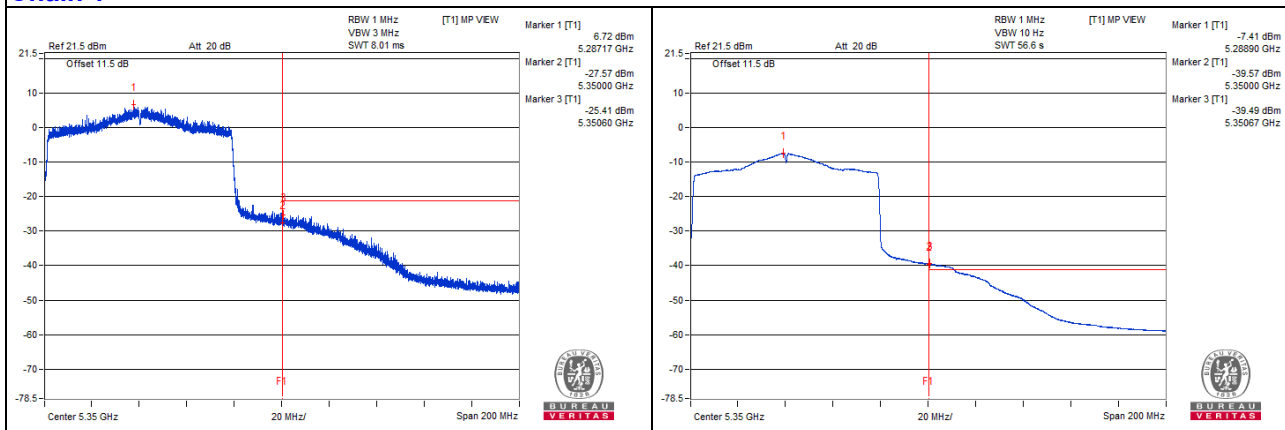

802.11ax (HE80) - Channel 106


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3701.56 PK	56.77	74	-17.23	-50.11	-49.27	8.17	-38.49
2	3681.25 AV	35.71	54	-18.29	-70.75	-70.71	8.17	-59.55
3	7392.18 PK	58.81	74	-15.19	-46.92	-48.48	8.17	-36.45
4	7367.18 AV	37.51	54	-16.49	-68.78	-69.09	8.17	-57.75
5	11057.81 PK	60.3	74	-13.7	-46.34	-45.95	8.17	-34.96
6	11064.06 AV	38.64	54	-15.36	-67.74	-67.86	8.17	-56.62
7	16582 PK	53.34	68.2	-14.86	-54.21	-52.21	8.17	-41.92


Note :

1. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
2. # : Non-restricted frequency, no limit for average emission.

Chain 0

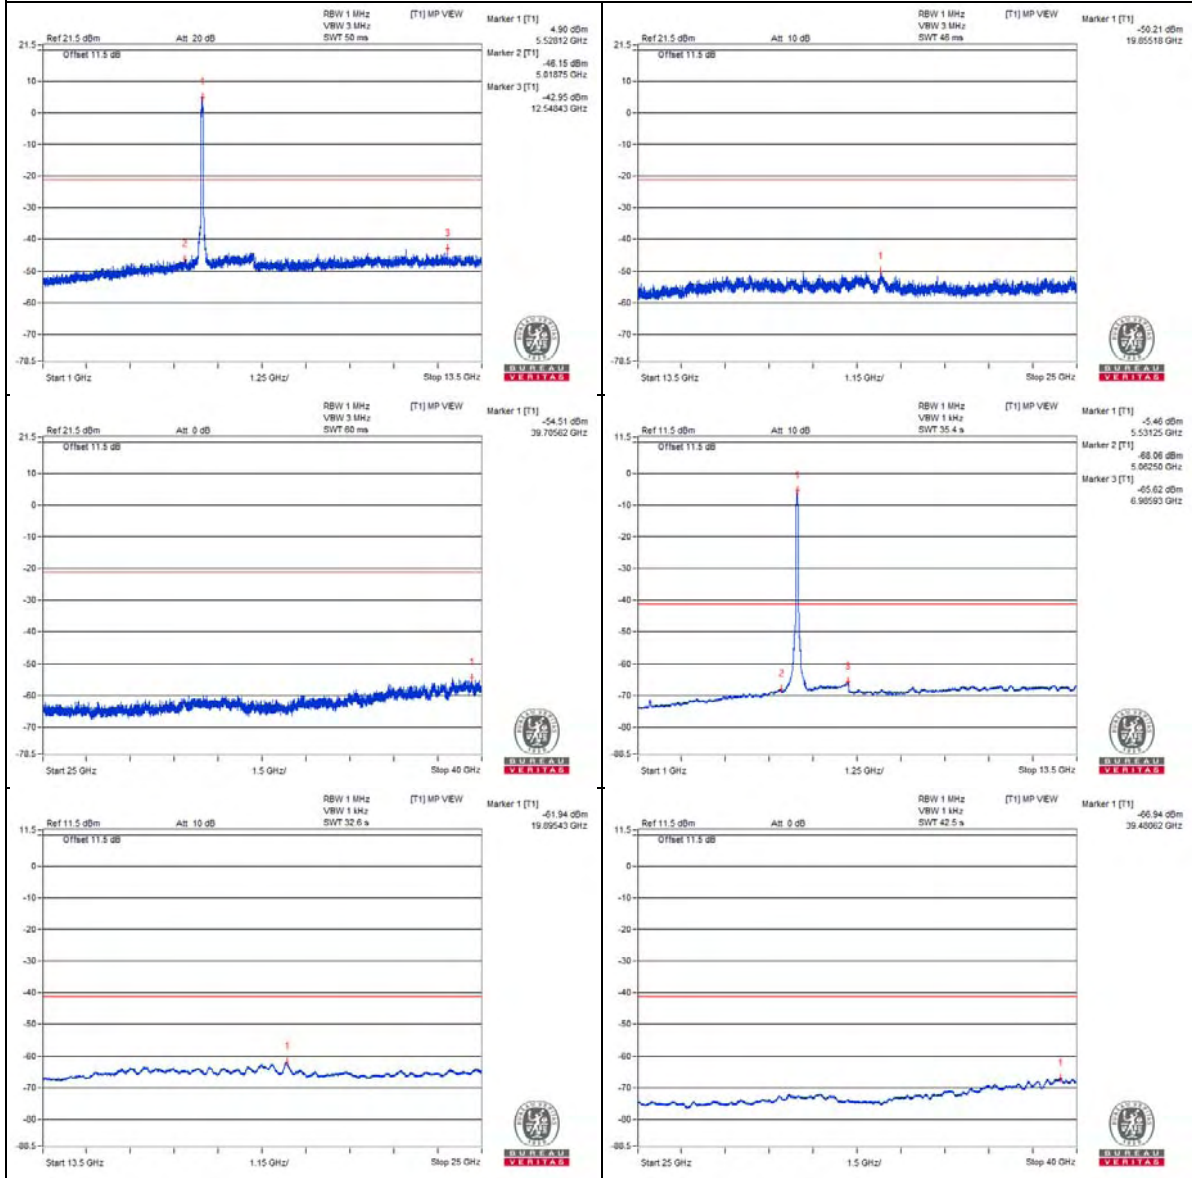

Chain 1

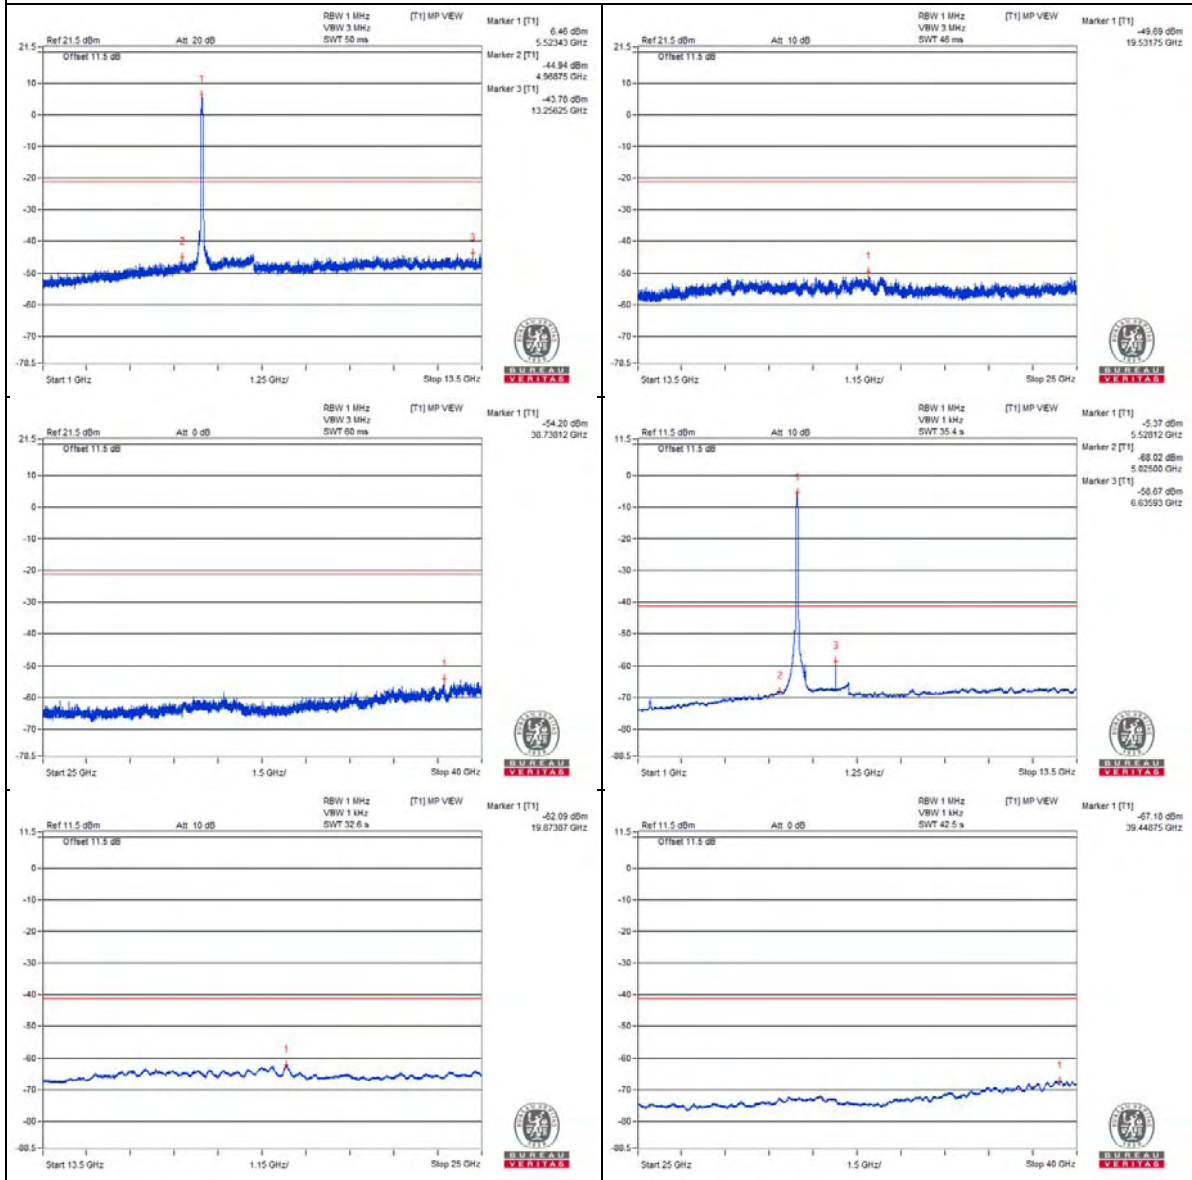

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5456 PK	71.43	74	-2.57	-37.48	-32.96	7.82	-23.83
2	5459.5 AV	56.24	54	*2.24	-50.49	-49.3	7.82	-39.02
3	5464.12 PK	71.72	68.2	*3.52	-36.03	-33.17	7.82	-23.54

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

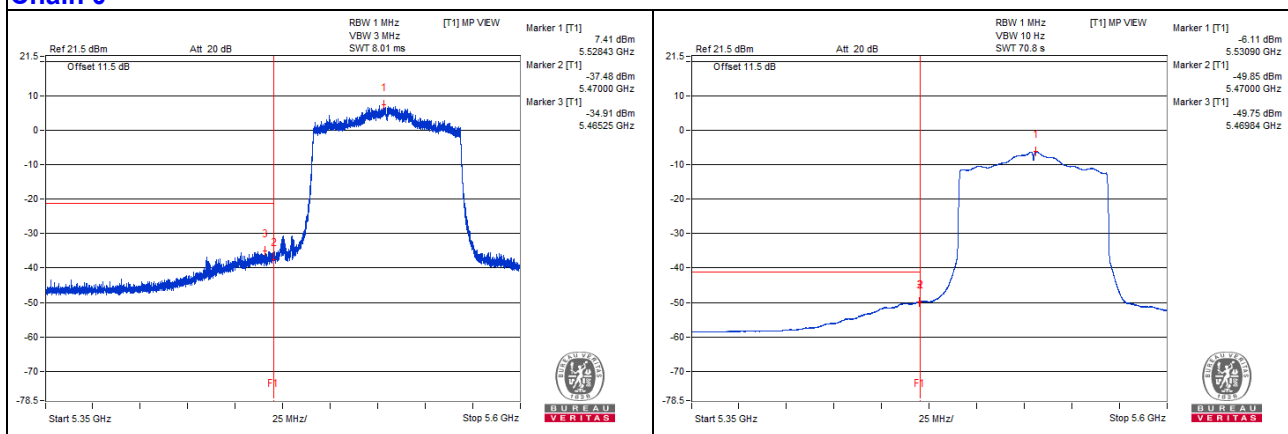

Chain 1

