

FCC Test Report

Report No.: RF201119E01-6

FCC ID: J9C-QCNFA765

Test Model: QCNFA765

Received Date: Nov. 19, 2020

Test Date: Jan. 27 to Mar. 20, 2021

Issued Date: Apr. 09, 2021

Applicant: Qualcomm Technologies, Inc.

Address: 5775 Morehouse Drive, San Diego, CA 92121-1714

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Antenna	10
3.3 Description of Test Modes	11
3.3.1 Test Mode Applicability and Tested Channel Detail	14
3.4 Duty Cycle of Test Signal	26
3.5 Description of Support Units	33
3.5.1 Configuration of System under Test	34
3.6 General Description of Applied Standard	35
4 Test Types and Results	36
4.1 Radiated Emission and Bandedge Measurement.....	36
4.1.1 Limits of Radiated Emission and Bandedge Measurement	36
4.1.2 Test Instruments	37
4.1.3 Test Procedure	40
4.1.4 Test Setup.....	42
4.1.5 EUT Operating Condition	43
4.1.6 Test Results (Radiated Measurement)	44
4.1.7 Test Results (Mode 1).....	45
4.1.8 Test Results (Mode 2).....	144
4.1.9 Test Results (Conducted Measurement)	272
4.2 In-Band Emission (Mask) Measurement	1215
4.2.1 Limits of In-Band Emission (Mask) Measurement.....	1215
4.2.2 Test Setup.....	1215
4.2.3 Test Instruments	1215
4.2.4 Test Procedure	1216
4.2.5 EUT Operating Condition	1216
4.2.6 Test Results (Mode 1).....	1217
4.2.7 Test Results (Mode 2).....	1249
4.3 Conducted Emission Measurement	1309
4.3.1 Limits of Conducted Emission Measurement	1309
4.3.2 Test Instruments	1309
4.3.3 Test Procedure	1310
4.3.4 Test Setup.....	1310
4.3.5 EUT Operating Condition	1310
4.3.6 Test Results	1311
4.4 Transmit Power Measurement	1313
4.4.1 Limits of Transmit Power Measurement	1313
4.4.2 Test Setup.....	1313
4.4.3 Test Instruments	1313
4.4.4 Test Procedure	1314
4.4.5 EUT Operating Condition	1314
4.4.6 Test Result (Mode 1)	1315
4.4.7 Test Result (Mode 2)	1322
4.5 Emission Bandwidth Measurement.....	1336
4.5.1 Limits of Emission Bandwidth Measurement.....	1336
4.5.2 Test Setup.....	1336
4.5.3 Test Instruments	1336
4.5.4 Test Procedure	1336

4.5.5 Test Results (Mode 1).....	1337
4.5.6 Test Results (Mode 2).....	1362
4.6 Peak Power Spectral Density Measurement	1397
4.6.1 Limits of Peak Power Spectral Density Measurement	1397
4.6.2 Test Setup.....	1397
4.6.3 Test Instruments	1397
4.6.4 Test Procedure	1397
4.6.5 EUT Operating Condition	1397
4.6.6 Test Results (Mode 1).....	1398
4.6.7 Test Results (Mode 2).....	1411
4.7 Contention Based Protocol Measurement	1429
4.7.1 Limits of Contention Based Protocol Measurement	1429
4.7.2 Test Setup.....	1429
4.7.3 Test Instruments	1429
4.7.4 Test Procedure	1430
4.7.5 EUT Operating Condition	1430
4.7.6 Test Results	1431
4.8 Frequency Stability Measurement.....	1455
4.8.1 Limits of Frequency Stability Measurement	1455
4.8.2 Test Setup.....	1455
4.8.3 Test Instruments	1455
4.8.4 Test Procedure	1455
4.8.5 EUT Operating Condition	1455
4.8.6 Test Results	1456
4.9 Dual Client- Proper Power Adjustment	1457
4.9.1 Limits of Frequency Stability Measurement	1457
4.9.2 Test Setup.....	1457
4.9.3 Test Instruments	1457
4.9.4 Test Procedure	1457
4.9.5 EUT Operating Condition	1458
4.9.6 Test Results	1458
4.10 Operational Restrictions for 6GHz U-NII Devices	1459
4.10.1 Limits of Operational Restrictions for 6 GHz U-NII Devices.....	1459
4.10.2 Test Setup.....	1459
4.10.3 Test Instruments	1459
4.10.4 Test Procedure	1459
4.10.5 Test Results	1459
5 Pictures of Test Arrangements.....	1460
Appendix A– Information of the Testing Laboratories.....	1461
Appendix B - Radiated Emission Measurement.....	1462
5.1.1 Limits of Radiated Emission and Bandedge Measurement	1462
5.1.2 Test Instruments	1463
5.1.3 Test Procedure	1464
5.1.4 Deviation from Test Standard	1464
5.1.5 Test Setup.....	1464
5.1.6 EUT Operating Condition	1464
5.1.7 Test Results (Mode 1).....	1465
5.1.8 Test Results (Mode 2).....	1489

Release Control Record

Issue No.	Description	Date Issued
RF201119E01-6	Original release.	Apr. 09, 2021

1 Certificate of Conformity

Product: Wi-Fi 6E BT 5.2 M.2 2230 Module

Brand: Qualcomm

Test Model: QCNFA765

Sample Status: Engineering sample

Applicant: Qualcomm Technologies, Inc.

Test Date: Jan. 27 to Mar. 20, 2021

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Vivian Huang , **Date:** Apr. 09, 2021
Vivian Huang / Specialist

Approved by : Clark Lin , **Date:** Apr. 09, 2021
Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(8)	AC Power Conducted Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -13.09dB at 0.57578MHz.
15.407(b)(5)(8)	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -5.2dB at 36.89MHz.
15.407(b)(6)	In-Band Emission (Mask)	PASS	Meet the requirement of limit.
15.407(a)(4/5/6/7/8)	Max Average Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(10)	Emission Bandwidth Measurement	PASS	Meet the requirement of limit.
15.407(a)(4/5/6/7/8)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407 (d)(6)	Contention-based Protocol.	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.407(a)(7)(8)	Dual Client- Proper Power Adjustment	PASS	Declaration by applicant.
15.407(d)	Operational restrictions for 6 GHz U-NII devices	PASS	Declaration by applicant
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF 4L) not a standard connector.

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	3.1 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.5 dB
	6GHz ~ 18GHz	5.1 dB
	18GHz ~ 40GHz	5.3 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Wi-Fi 6E BT 5.2 M.2 2230 Module
Brand	Qualcomm
Test Model	QCNFA765
Status of EUT	Engineering sample
Power Supply Rating	3.3Vdc from host equipment
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 1024QAM for OFDM in 11ac mode and VHT20/40 in 2.4GHz mode 4096QAM for OFDMA in 11ax HE mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 300Mbps VHT20/40: up to 500Mbps 802.11ac: up to 2166.7Mbps 802.11ax: up to 2969.7Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.472GHz 5GHz: 5.18~ 5.24GHz, 5.26 ~ 5.32GHz, 5.5 ~ 5.72GHz, 5.745 ~ 5.825GHz 6GHz: Under control by Standard Power AP: 5.935 ~ 6.415GHz, 6.535 ~ 6.855GHz Under control by Low-powerIndoor AP: 5.935 ~ 6.415GHz, 6.435 ~ 6.525GHz, 6.535 ~ 6.855GHz, 6.865 ~ 7.115GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 13 802.11n (HT40), VHT40, 802.11ax (HE40): 9 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 25 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 12 802.11ac (VHT80), 802.11ax (HE80): 6 802.11ac (VHT160), 802.11ax (HE160): 2 6GHz: 802.11a/ax (HE20): 60 802.11ax (HE40): 29 802.11ax (HE80): 14 802.11ax (HE160): 7

Output Power	2.4GHz: 756.279mW 5.18 ~ 5.25GHz: 154.489mW 5.25 ~ 5.32GHz: 153.87mW 5.5 ~ 5.72GHz: 152.442mW 5.745 ~ 5.825GHz: 151.553mW Under control of a Standard Power AP: 5.935 ~ 6.415GHz: 152.069 mW (EIRP: 29.97 dBm / 993.116 mW) 6.535 ~ 6.855GHz: 151.395 mW (EIRP: 29.97 dBm / 993.116 mW) Under control of a Low-power Indoor AP: 5.935 ~ 6.415GHz: 23.162 mW (EIRP: 21.80 dBm / 151.356 mW) 6.435 ~ 6.525GHz: 23.607 mW (EIRP: 21.83 dBm / 152.405 mW) 6.535 ~ 6.855GHz: 23.692 mW (EIRP: 21.92 dBm / 155.597 mW) 6.865 ~ 7.115GHz: 22.235 mW (EIRP: 21.60 dBm / 144.544 mW)
Antenna Type	Refer to section 3.2
Antenna Connector	Refer to section 3.2
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. This device of WLAN (2.4GHz & 5GHz U-NII-1 Band) can support hotspot mode.
2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN(2.4GHz)	WLAN(6GHz)
2	WLAN(2.4GHz)	WLAN(5GHz)
3	WLAN(6GHz)	Bluetooth
4	WLAN(5GHz)	Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The device of WLAN (2.4GHz) and Bluetooth technology can't transmit simultaneously, it was used timely shared coexistence technology.
4. The module has two variant designs as following table:

SKU No.	Description
SKU #1	M.2 2230 E-key
SKU #2	M.2 2230 AE-key
From the above variants designs, the worst case was found in SKU #1 . Therefore only the test data of the mode was recorded in this report.	

5. The product provides option to depopulate external LNA (Low-Noise amplifier) from 5GHz/6GHz receive path. This test report covers variation of with/without external LNA and test was conducted to confirm not change in RF compliance and EMC. And worst case was found in without external LNA.

6. The EUT incorporates a MIMO function:

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	2TX	2RX
802.11g	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
VHT20	2TX	2RX
VHT40	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
802.11ax (RU26/52/106/242/484)	2TX	2RX
5GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ac (VHT20)	2TX	2RX
802.11ac (VHT40)	2TX	2RX
802.11ac (VHT80)	2TX	2RX
802.11ac (VHT160)	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
802.11ax (HE80)	2TX	2RX
802.11ax (HE160)	2TX	2RX
802.11ax (RU26/52/106/242/484/996/1992)	2TX	2RX
6GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
802.11ax (HE80)	2TX	2RX
802.11ax (HE160)	2TX	2RX
802.11ax (RU26/52/106/242/484/996/1992)	2TX	2RX

Note: The EUT support Beamforming and non-beamforming mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.

7. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Antenna

The antenna gain was declared by client; please refer to the following table:

Antenna Set	RF Chain No.	Brand	Model	Antenna Net Gain (dBi)	Frequency Range	Cable Loss (dB)	Antenna Type	Connector Type	Cable Length
1	Chain0/1	HONGBO	260-25094	3.53	2.4~2.4835 GHz	0.76	PIFA	i-pex(MHF 4L)	300mm
				3.06	5.15~5.25 GHz	1.16			
				3.07	5.25~5.35 GHz	1.18			
				4.81	5.47~5.725 GHz	1.2			
				4.2	5.725~5.850 GHz	1.27			
2	Chain0/1	HONGBO	260-25083	5.09	5.850~5.895 GHz	1.29	PIFA	i-pex(MHF 4L)	300mm
				5.14	5.925~6.425 GHz	1.32			
				5.09	6.425~6.525 GHz	1.35			
				5.16	6.525~6.875 GHz	1.4			
				5.12	6.875~7.125 GHz	1.45			
3	Chain0/1	HONGBO	260-25084	3.22	2.4~2.4835 GHz	0.5	Monopole	i-pex(MHF 4L)	200mm
				3.35	5.150~5.250 GHz	0.76			
				3.42	5.250~5.350 GHz	0.78			
				4.77	5.470~5.725 GHz	0.81			
				4.72	5.725~5.850 GHz	0.85			
				4.71	5.850~5.895 GHz	0.86			
				4.75	5.925~6.425 GHz	0.87			
				4.29	6.425~6.525 GHz	0.91			
				4.81	6.525~6.875 GHz	0.96			
				4.74	6.875~7.125 GHz	0.98			

Note: The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.3 Description of Test Modes

U-NII-5 (5925 ~ 6425MHz): Under control of a Low-power Indoor AP and Standard Power AP

25 channels are provided for 802.11a, 802.11ax (HE20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
2	5935 MHz	1	5955 MHz	5	5975 MHz	9	5955 MHz
13	6015 MHz	17	6035 MHz	21	6055 MHz	25	6075 MHz
29	6095 MHz	33	6115 MHz	37	6135 MHz	41	6155 MHz
45	6175 MHz	49	6195 MHz	53	6215 MHz	57	6235 MHz
61	6255 MHz	65	6275 MHz	69	6295 MHz	73	6315 MHz
77	6335 MHz	81	6355 MHz	85	6375 MHz	89	6395 MHz
93	6415MHz						

12 channels are provided for 802.11ax (HE40):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	5965 MHz	11	6005 MHz	19	6045 MHz	27	6085 MHz
35	6125 MHz	43	6165 MHz	51	6205 MHz	59	6245 MHz
67	6285MHz	75	6325 MHz	83	6365 MHz	91	6405 MHz

6 channels are provided for 802.11ax (HE80):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
7	5985 MHz	23	6065 MHz	39	6145 MHz	55	6225 MHz
71	6305 MHz	87	6385 MHz				

3 channels are provided for 802.11ax (HE160):

Channel	Frequency	Channel	Frequency	Channel	Frequency
15	6025 MHz	47	6185 MHz	79	6345 MHz

U-NII-6 (6425 ~ 6525MHz): Under control of a Low-power Indoor AP

5 channels are provided for 802.11a, 802.11ax (HE20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
97	6435 MHz	101	6455 MHz	105	6475 MHz	109	6495 MHz
113	6515 MHz						

3 channels are provided for 802.11ax (HE40):

Channel	Frequency	Channel	Frequency	Channel	Frequency
99	6445 MHz	107	6485 MHz	*115	6525 MHz

1 channel is provided for 802.11ax (HE80):

Channel	Frequency
103	6465 MHz

1 channel is provided for 802.11ax (HE160):

Channel	Frequency
*111	6505 MHz

U-NII-7 (6525 ~ 6875MHz): Under control of a Low-power Indoor AP and Standard Power AP

17 channels are provided for 802.11a, 802.11ax (HE20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
117	6535 MHz	121	6555 MHz	125	6575 MHz	129	6595 MHz
133	6615 MHz	137	6635 MHz	141	6655 MHz	145	6675 MHz
149	6695 MHz	153	6715 MHz	157	6735 MHz	161	6755 MHz
165	6775 MHz	169	6795 MHz	173	6815 MHz	177	6835 MHz
181	6855 MHz						

8 channels are provided for 802.11ax (HE40):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
123	6565 MHz	131	6605 MHz	139	6645 MHz	147	6685 MHz
155	6725 MHz	163	6765 MHz	171	6805 MHz	179	6845 MHz

4 channels are provided for 802.11ax (HE80):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
*119	6545 MHz	135	6625 MHz	151	6705 MHz	167	6785 MHz

2 channels are provided for 802.11ax (HE160):

Channel	Frequency	Channel	Frequency
143	6665 MHz	175	*6825 MHz

U-NII-8 (6875 ~ 7125MHz): Under control of a Low-power Indoor AP

13 channels are provided for 802.11a, 802.11ax (HE20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
185	6875 MHz	189	6895 MHz	193	6915 MHz	197	6935 MHz
201	6955 MHz	205	6975 MHz	209	6995 MHz	213	7015 MHz
217	7035 MHz	221	7055 MHz	225	7075 MHz	229	7095 MHz
233	7115 MHz						

6 channels are provided for 802.11ax (HE40):

Channel	Frequency	Channel	Frequency	Channel	Frequency
187	6885 MHz	195	6925 MHz	203	6965 MHz
211	7005 MHz	219	7045 MHz	227	7085 MHz

3 channels are provided for 802.11ax (HE80):

Channel	Frequency	Channel	Frequency	Channel	Frequency
*183	6865 MHz	199	6945 MHz	215	7025 MHz

1 channel is provided for 802.11ax (HE160):

Channel	Frequency
207	6985 MHz

Note:

* mean these's straddle channels and operating under control by Low-power indoor AP only.

3.3.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To						Description
	RE $\geq$ 1G	RE<1G	IBE	PLC	CBP	APCM	
1	√	√	√	√	-	√	Under control by Standard Power AP
2	√	√	√	-	√	√	Under control by Low-power Indoor AP

Where

RE $\geq$ 1G: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission

IBE: In-Band Emission (MASK)

RE<1G: Radiated Emission below 1GHz

APCM: Antenna Port Conducted Measurement

CBP: Contention Based Protocol

Under control of a Standard Power AP (Mode 1) **Radiated Emission Measurement (Above 1GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11a	5925-6425	1 to 93	1, 2, 45, 93	OFDM	BPSK	6Mb/s
	6525-6875	117 to 181	117, 149, 181	OFDM	BPSK	6Mb/s
802.11ax (HE20)	5955-6415	1 to 93	1, 2, 45, 93	OFDMA	BPSK	MCS0
	6535-6875	117 to 181	117, 149, 181	OFDMA	BPSK	MCS0
802.11ax (HE40)	5965-6405	3 to 91	3, 43, 91	OFDMA	BPSK	MCS0
	6525-6885	123 to 179	123, 155, 179	OFDMA	BPSK	MCS0
802.11ax (HE80)	5985-6385	7 to 87	7, 39, 87	OFDMA	BPSK	MCS0
	6525-6875	135 to 167	135, 151, 167	OFDMA	BPSK	MCS0
802.11ax (HE160)	6025-6345	15 to 79	15, 47, 79	OFDMA	BPSK	MCS0
	6665-6825	143	143	OFDMA	BPSK	MCS0

Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration				
							RU26	RU52	RU106	RU242	
20	5925-6425	1 to 93	1	OFDMA	BPSK	MCS0	26/0	52/37	106/53	242/61	
			2				26/0	52/37	106/53	242/61	
			45				26/4	52/38	106/53	242/61	
			93				26/8	52/40	106/54	242/61	
	6525-6875	117 to 181	117	OFDMA	BPSK	MCS0	26/0	52/37	106/53	242/61	
			149				26/4	52/38	106/54	242/61	
			181				26/8	52/40	106/54	242/61	
Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration				
							RU26	RU52	RU106	RU242	RU484
40	5925-6425	3 to 91	3	OFDMA	BPSK	MCS0	26/9	52/41	106/55	242/63	484/65
			43				26/27	52/48	106/58	242/62	484/65
			91				26/27	52/48	106/58	242/62	484/65
	6525-6875	123 to 179	123	OFDMA	BPSK	MCS0	26/9	52/41	106/55	242/63	484/65
			155				26/9	52/41	106/55	242/63	484/65
			179				26/27	52/48	106/58	242/62	484/65
Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration				
							RU996				
80	5925-6425	7 to 87	7	OFDMA	BPSK	MCS0	996/67				
			39				996/67				
			87				996/67				
	6525-6875	135 to 167	135	OFDMA	BPSK	MCS0	996/67				
			151				996/67				
			167				996/67				
Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration				
							RU1992				
160	5925-6425	15 to 79	15,47,79	OFDMA	BPSK	MCS0	1992/68				
							1992/68				
							1992/68				
	6525-6875	143	143	OFDMA	BPSK	MCS0	1992/68				
							1992/68				
							1992/68				

Radiated Emission Measurement (Below 1GHz): (Radiated & Conducted Measurement)

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11a	5925-6425 6525-6875	1 to 93 117 to 181	117	OFDM	BPSK	6Mb/s

In-Band Emission (MASK) Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode			FREQ. Band (MHz)	Available Channel	Tested Channel		Modulation Technology	Modulation Type		Data Rate Parameter	
802.11a			5925-6425	1 to 93	1, 2, 45, 93		OFDM	BPSK		6Mb/s	
			6525-6875	117 to 181	117, 149, 181		OFDM	BPSK		6Mb/s	
802.11ax (HE20)			5955-6415	1 to 93	1, 2, 45, 93		OFDMA	BPSK		MCS0	
			6535-6875	117 to 181	117, 149, 181		OFDMA	BPSK		MCS0	
802.11ax (HE40)			5965-6405	3 to 91	3, 43, 91		OFDMA	BPSK		MCS0	
			6525-6885	123 to 179	123, 155, 179		OFDMA	BPSK		MCS0	
802.11ax (HE80)			5985-6385	7 to 87	7, 39, 87		OFDMA	BPSK		MCS0	
			6525-6875	135 to 167	135,151,167		OFDMA	BPSK		MCS0	
802.11ax (HE160)			6025-6345	15 to 79	15,47,79		OFDMA	BPSK		MCS0	
			6665-6825	143	143		OFDMA	BPSK		MCS0	
Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration				
							RU26	RU52	RU106	RU242	
20	5925-6425	1 to 93	1	OFDMA	BPSK	MCS0	26/0	52/37	106/53	242/61	
			2				26/0	52/37	106/53	242/61	
			45				26/4	52/38	106/53	242/61	
			93				26/8	52/40	106/54	242/61	
	6525-6875	117 to 181	117	OFDMA	BPSK	MCS0	26/0	52/37	106/53	242/61	
			149				26/4	52/38	106/54	242/61	
			181				26/8	52/40	106/54	242/61	
Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration				
							RU26	RU52	RU106	RU242	RU484
40	5925-6425	3 to 91	3	OFDMA	BPSK	MCS0	26/9	52/41	106/55	242/63	484/65
			43				26/27	52/48	106/58	242/62	484/65
			91				26/27	52/48	106/58	242/62	484/65
	6525-6875	123 to 179	123	OFDMA	BPSK	MCS0	26/9	52/41	106/55	242/63	484/65
			155				26/9	52/41	106/55	242/63	484/65
			179				26/27	52/48	106/58	242/62	484/65
Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration				
							RU996				
80	5925-6425	7 to 87	7	OFDMA	BPSK	MCS0	996/67				
			39				996/67				
			87				996/67				
	6525-6875	135 to 167	135	OFDMA	BPSK	MCS0	996/67				
			151				996/67				
			167				996/67				

Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
							RU1992
160	5925-6425	15 to 79	15,47,79	OFDMA	BPSK	MCS0	1992/68
							1992/68
							1992/68
	6525-6875	143	143	OFDMA	BPSK	MCS0	1992/68
							1992/68
							1992/68

Power Line Conducted Emission Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11a	5925-6425	1 to 93	117	OFDM	BPSK	6Mb/s
	6525-6875	117 to 181				

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode			FREQ. Band (MHz)		Available Channel		Tested Channel		Modulation Technology		Modulation Type		Data Rate Parameter	
802.11a			5925-6425		1 to 93		1, 2, 45, 93		OFDM		BPSK		6Mb/s	
			6525-6875		117 to 181		117, 149, 181		OFDM		BPSK		6Mb/s	
802.11ax (HE20)			5955-6415		1 to 93		1, 2, 45, 93		OFDMA		BPSK		MCS0	
			6535-6875		117 to 181		117, 149, 181		OFDMA		BPSK		MCS0	
802.11ax (HE40)			5965-6405		3 to 91		3, 43, 91		OFDMA		BPSK		MCS0	
			6525-6885		123 to 179		123, 155, 179		OFDMA		BPSK		MCS0	
802.11ax (HE80)			5985-6385		7 to 87		7, 39, 87		OFDMA		BPSK		MCS0	
			6525-6875		135 to 167		135,151,167		OFDMA		BPSK		MCS0	
802.11ax (HE160)			6025-6345		15 to 79		15,47,79		OFDMA		BPSK		MCS0	
			6665-6825		143		143		OFDMA		BPSK		MCS0	
Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration							
							RU26	RU52	RU106	RU242				
20	5925-6425	1 to 93	1	OFDMA	BPSK	MCS0	26/0	52/37	106/53	242/61				
			2				26/0	52/37	106/53	242/61				
			45				26/4	52/38	106/53	242/61				
			93				26/8	52/40	106/54	242/61				
	6525-6875	117 to 181	117	OFDMA	BPSK	MCS0	26/0	52/37	106/53	242/61				
			149				26/4	52/38	106/54	242/61				
			181				26/8	52/40	106/54	242/61				

Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration				
							RU26	RU52	RU106	RU242	RU484
40	5925-6425	3 to 91	3	OFDMA	BPSK	MCS0	26/9	52/41	106/55	242/63	484/65
			43				26/27	52/48	106/58	242/62	484/65
			91				26/27	52/48	106/58	242/62	484/65
	6525-6875	123 to 179	123	OFDMA	BPSK	MCS0	26/9	52/41	106/55	242/63	484/65
			155				26/9	52/41	106/55	242/63	484/65
			179				26/27	52/48	106/58	242/62	484/65
Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration				
							RU996				
80	5925-6425	7 to 87	7	OFDMA	BPSK	MCS0	996/67				
			39				996/67				
			87				996/67				
	6525-6875	135 to 167	135	OFDMA	BPSK	MCS0	996/67				
			151				996/67				
			167				996/67				
Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration				
							RU1992				
160	5925-6425	15 to 79	15,47,79	OFDMA	BPSK	MCS0	1992/68				
							1992/68				
							1992/68				
	6525-6875	143	143	OFDMA	BPSK	MCS0	1992/68				
							1992/68				
							1992/68				

Under control of a Low-power Indoor AP (Mode 2)

Radiated Emission Measurement (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11a	5925-6425	1 to 93	1, 2, 45, 93	OFDM	BPSK	6Mb/s
	6425-6525	97 to 113	97, 105, 113	OFDM	BPSK	6Mb/s
	6525-6875	117 to 181	117, 149, 181	OFDM	BPSK	6Mb/s
	6875-7125	185 to 233	185, 209, 229, 233	OFDM	BPSK	6Mb/s
802.11ax (HE20)	5925-6425	1 to 93	1, 2, 45, 93	OFDMA	BPSK	MCS0
	6425-6525	97 to 113	97, 105, 113	OFDMA	BPSK	MCS0
	6525-6875	117 to 181	117, 149, 181	OFDMA	BPSK	MCS0
	6875-7125	185 to 233	185, 209, 229, 233	OFDMA	BPSK	MCS0
802.11ax (HE40)	5925-6425	3 to 91	3, 43, 91	OFDMA	BPSK	MCS0
	6425-6525	99 to 115	99, 107, 115	OFDMA	BPSK	MCS0
	6525-6875	123 to 179	123, 155, 179	OFDMA	BPSK	MCS0
	6875-7125	187 to 227	187, 211, 227	OFDMA	BPSK	MCS0
802.11ax (HE80)	5925-6425	7 to 87	7, 39, 87	OFDMA	BPSK	MCS0
	6425-6525	103	103	OFDMA	BPSK	MCS0
	6525-6875	119 to 183	119, 151, 183	OFDMA	BPSK	MCS0
	6875-7125	199 to 215	199, 215	OFDMA	BPSK	MCS0
802.11ax (HE160)	5925-6425	15 to 79	15, 47, 79	OFDMA	BPSK	MCS0
	6425-6525	111	111	OFDMA	BPSK	MCS0
	6525-6875	143 to 175	143, 175	OFDMA	BPSK	MCS0
	6875-7125	207	207	OFDMA	BPSK	MCS0

Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration													
							RU26	RU52	RU106	RU242										
20	5925-6425	1 to 93	1, 2 45 93	OFDMA	BPSK	MCS0	26/0 26/0 26/4 26/8	52/37 52/37 52/38 52/40	106/53 106/53 106/53 106/54	242/61 242/61 242/61 242/61										
			6425-6525				97 to 113	97 105 113	OFDMA	BPSK	MCS0	26/0 26/4 26/8	52/37 52/38 52/40	106/53 106/53 106/54	242/61 242/61 242/61					
								6525-6875				117 to 181	117 149 181	OFDMA	BPSK	MCS0	26/0 26/4 26/8	52/37 52/38 52/40	106/53 106/54 106/54	242/61 242/61 242/61
													6875-7125				185 to 233	185 209 229 233	OFDMA	BPSK
	Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration												
								RU26	RU52	RU106	RU242	RU484								
	40	5925-6425	3 to 91	3 4 91	OFDMA	BPSK	MCS0	26/9 26/27 26/27	52/41 52/48 52/48	106/55 106/58 106/58	242/63 242/62 242/62	484/65 484/65 484/65								
				6425-6525				99 to 115	99 107 115	OFDMA	BPSK	MCS0	26/9 26/9 26/27	52/41 52/41 52/48	106/55 106/55 106/58	242/63 242/63 242/62	484/65 484/65 484/65			
									6525-6875				123 to 179	123 155 179	OFDMA	BPSK	MCS0	26/9 26/9 26/27	52/41 52/41 52/48	106/55 106/55 106/58
		6875-7125	187 to 227		187 211 227	OFDMA	BPSK							MCS0				26/9 26/9 26/27	52/41 52/41 52/48	106/55 106/55 106/58
				Preamble (MHz)	FREQ. Band (MHz)			Available Channel		Tested Channel	Modulation Technology	Modulation Type						Data Rate Parameter	RU Configuration	
									RU996											
80		5925-6425	7 to 87	7 39 87	OFDMA	BPSK	MCS0	996/67 996/67 996/67												
		6425-6525	103	103	OFDMA	BPSK	MCS0	996/67												
		6525-6875	119 to 183	119 151 183	OFDMA	BPSK	MCS0	996/67 996/67 996/67												
		6875-7125	199 to 215	199 215	OFDMA	BPSK	MCS0	996/67 996/67												

Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
							RU1992
160	5925-6425	15 to 79	15 47 79	OFDMA	BPSK	MCS0	1992/68 1992/68 1992/68
	6425-6525	111	111	OFDMA	BPSK	MCS0	1992/68
	6525-6875	143 to 175	143 175	OFDMA	BPSK	MCS0	1992/68 1992/68
	6875-7125	207	207	OFDMA	BPSK	MCS0	1992/68

Radiated Emission Measurement (Below 1GHz): (Conducted measurement)

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11ax (HE160)	5925-6425 6425-6525 6525-6875 6875-7125	15 to 79 111 143 to 175 207	143	OFDMA	BPSK	MCS0

In-Band Emission (MASK) Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11a	5925-6425	1 to 93	1, 2, 45, 93	OFDM	BPSK	6Mb/s
	6425-6525	97 to 113	97, 105, 113	OFDM	BPSK	6Mb/s
	6525-6875	117 to 181	117, 149, 181	OFDM	BPSK	6Mb/s
	6875-7125	185 to 233	185, 209, 229, 233	OFDM	BPSK	6Mb/s
802.11ax (HE20)	5925-6425	1 to 93	1, 2, 45, 93	OFDMA	BPSK	MCS0
	6425-6525	97 to 113	97, 105, 113	OFDMA	BPSK	MCS0
	6525-6875	117 to 181	117, 149, 181	OFDMA	BPSK	MCS0
	6875-7125	185 to 233	185, 209, 229, 233	OFDMA	BPSK	MCS0
802.11ax (HE40)	5925-6425	3 to 91	3, 43, 91	OFDMA	BPSK	MCS0
	6425-6525	99 to 115	99, 107, 115	OFDMA	BPSK	MCS0
	6525-6875	123 to 179	123, 155, 179	OFDMA	BPSK	MCS0
	6875-7125	187 to 227	187, 211, 227	OFDMA	BPSK	MCS0
802.11ax (HE80)	5925-6425	7 to 87	7, 39, 87	OFDMA	BPSK	MCS0
	6425-6525	103	103	OFDMA	BPSK	MCS0
	6525-6875	119 to 183	119, 151, 183	OFDMA	BPSK	MCS0
	6875-7125	199 to 215	199, 215	OFDMA	BPSK	MCS0

802.11ax (HE160)			5925-6425	15 to 79	15, 47, 79	OFDMA	BPSK	MCS0				
			6425-6525	111	111	OFDMA	BPSK	MCS0				
			6525-6875	143 to 175	143, 175	OFDMA	BPSK	MCS0				
			6875-7125	207	207	OFDMA	BPSK	MCS0				
Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration					
							RU26	RU52	RU106	RU242		
20	5925-6425	1 to 93	1,	OFDMA	BPSK	MCS0	26/0	52/37	106/53	242/61		
			2				26/0	52/37	106/53	242/61		
			45				26/4	52/38	106/53	242/61		
			93				26/8	52/40	106/54	242/61		
	6425-6525	97 to 113	97	OFDMA	BPSK	MCS0	26/0	52/37	106/53	242/61		
			105				26/4	52/38	106/53	242/61		
			113				26/8	52/40	106/54	242/61		
	6525-6875	117 to 181	117	OFDMA	BPSK	MCS0	26/0	52/37	106/53	242/61		
			149				26/4	52/38	106/54	242/61		
			181				26/8	52/40	106/54	242/61		
	6875-7125	185 to 233	185	OFDMA	BPSK	MCS0	26/0	52/37	106/53	242/61		
			209				26/4	52/38	106/54	242/61		
			229				26/8	52/40	106/54	242/61		
			233				26/8	52/40	106/54	242/61		
	Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration				
								RU26	RU52	RU106	RU242	RU484
40	5925-6425	3 to 91	3	OFDMA	BPSK	MCS0	26/9	52/41	106/55	242/63	484/65	
			4				26/27	52/48	106/58	242/62	484/65	
			91				26/27	52/48	106/58	242/62	484/65	
	6425-6525	99 to 115	99	OFDMA	BPSK	MCS0	26/9	52/41	106/55	242/63	484/65	
			107				26/9	52/41	106/55	242/63	484/65	
			115				26/27	52/48	106/58	242/62	484/65	
	6525-6875	123 to 179	123	OFDMA	BPSK	MCS0	26/9	52/41	106/55	242/63	484/65	
			155				26/9	52/41	106/55	242/62	484/65	
			179				26/27	52/48	106/58	242/62	484/65	
	6875-7125	187 to 227	187	OFDMA	BPSK	MCS0	26/9	52/41	106/55	242/63	484/65	
			211				26/9	52/41	106/55	242/63	484/65	
			227				26/27	52/48	106/58	242/62	484/65	
Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration					
							RU996					
80	5925-6425	7 to 87	7	OFDMA	BPSK	MCS0	996/67					
			39				996/67					
			87				996/67					
	6425-6525	103	103	OFDMA	BPSK	MCS0	996/67					
	6525-6875	119 to 183	119	OFDMA	BPSK	MCS0	996/67					
			151				996/67					
			183				996/67					
6875-7125	119 to 215	199	OFDMA	BPSK	MCS0	996/67						
		215				996/67						

Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
							RU1992
160	5925-6425	15 to 79	15 47 79	OFDMA	BPSK	MCS0	1992/68 1992/68 1992/68
	6425-6525	111	111	OFDMA	BPSK	MCS0	1992/68
	6525-6875	143 to 175	143 175	OFDMA	BPSK	MCS0	1992/68 1992/68
	6875-7125	207	207	OFDMA	BPSK	MCS0	1992/68

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11a	5925-6425	1 to 93	1, 2, 45, 93	OFDM	BPSK	6Mb/s
	6425-6525	97 to 113	97, 105, 113	OFDM	BPSK	6Mb/s
	6525-6875	117 to 181	117, 149, 181	OFDM	BPSK	6Mb/s
	6875-7125	185 to 233	185, 209, 229, 233	OFDM	BPSK	6Mb/s
802.11ax (HE20)	5925-6425	1 to 93	1, 2, 45, 93	OFDMA	BPSK	MCS0
	6425-6525	97 to 113	97, 105, 113	OFDMA	BPSK	MCS0
	6525-6875	117 to 181	117, 149, 181	OFDMA	BPSK	MCS0
	6875-7125	185 to 233	185, 209, 229, 233	OFDMA	BPSK	MCS0
802.11ax (HE40)	5925-6425	3 to 91	3, 43, 91	OFDMA	BPSK	MCS0
	6425-6525	99 to 115	99, 107, 115	OFDMA	BPSK	MCS0
	6525-6875	123 to 179	123, 155, 179	OFDMA	BPSK	MCS0
	6875-7125	187 to 227	187, 211, 227	OFDMA	BPSK	MCS0
802.11ax (HE80)	5925-6425	7 to 87	7, 39, 87	OFDMA	BPSK	MCS0
	6425-6525	103	103	OFDMA	BPSK	MCS0
	6525-6875	119 to 183	119, 151, 183	OFDMA	BPSK	MCS0
	6875-7125	199 to 215	199, 215	OFDMA	BPSK	MCS0
802.11ax (HE160)	5925-6425	15 to 79	15, 47, 79	OFDMA	BPSK	MCS0
	6425-6525	111	111	OFDMA	BPSK	MCS0
	6525-6875	143 to 175	143, 175	OFDMA	BPSK	MCS0
	6875-7125	207	207	OFDMA	BPSK	MCS0

Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration													
							RU26	RU52	RU106	RU242										
20	5925- 6425	1 to 93	1, 2 45 93	OFDMA	BPSK	MCS0	26/0 26/0 26/4 26/8	52/37 52/37 52/38 52/40	106/53 106/53 106/53 106/54	242/61 242/61 242/61 242/61										
			6425- 6525				97 to 113	97 105 113	OFDMA	BPSK	MCS0	26/0 26/4 26/8	52/37 52/38 52/40	106/53 106/53 106/54	242/61 242/61 242/61					
								6525- 6875				117 to 181	117 149 181	OFDMA	BPSK	MCS0	26/0 26/4 26/8	52/37 52/38 52/40	106/53 106/54 106/54	242/61 242/61 242/61
													6875- 7125				185 to 233	185 209 229 233	OFDMA	BPSK
	Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration												
								RU26	RU52	RU106	RU242	RU484								
								40	5925- 6425	3 to 91	3 4 91	OFDMA		BPSK	MCS0	26/9 26/27 26/27		52/41 52/48 52/48		
											6425- 6525		99 to 115			99 107 115	OFDMA	BPSK	MCS0	26/9 26/9 26/27
	6525- 6875	123 to 179	123 155 179	OFDMA	BPSK	MCS0	26/9 26/9 26/27									52/41 52/41 52/48				106/55 106/55 106/58
			6875- 7125				187 to 227		187 211 227	OFDMA		BPSK		MCS0	26/9 26/9 26/27	52/41 52/41 52/48				106/55 106/55 106/58
									Preamble (MHz)		FREQ. Band (MHz)		Available Channel		Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration	
	RU996																			
	80	5925- 6425	7 to 87	7 39 87	OFDMA	BPSK	MCS0		996/67 996/67 996/67											
				6425- 6525					103	103	OFDMA	BPSK	MCS0	996/67						
		6525- 6875	119 to 183	119 151 183	OFDMA	BPSK	MCS0		996/67 996/67 996/67											
				6875- 7125					199 to 215	199 215	OFDMA	BPSK	MCS0	996/67 996/67						

Preamble (MHz)	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
							RU1992
160	5925-6425	15 to 79	15 47 79	OFDMA	BPSK	MCS0	1992/68 1992/68 1992/68
	6425-6525	111	111	OFDMA	BPSK	MCS0	1992/68
	6525-6875	143 to 175	143 175	OFDMA	BPSK	MCS0	1992/68 1992/68
	6875-7125	207	207	OFDMA	BPSK	MCS0	1992/68

Contention Based Protocol Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11ax (HE20)	5925-6425	1 to 93	33	OFDMA	BPSK	MCS0
	6425-6525	97 to 113	97	OFDMA	BPSK	MCS0
	6525-6875	117 to 181	129	OFDMA	BPSK	MCS0
	6875-7125	185 to 233	193	OFDMA	BPSK	MCS0
802.11ax (HE160)	5925-6425	15 to 79	47	OFDMA	BPSK	MCS0
	6425-6525	111	111	OFDMA	BPSK	MCS0
	6525-6875	143 to 175	143	OFDMA	BPSK	MCS0
	6875-7125	207	207	OFDMA	BPSK	MCS0

Test Condition:

Applicable To	Environmental Conditions	Input Power (System)	Tested By
RE $\geq$ 1G	24deg. C, 66%RH	120Vac, 60Hz	Tom Yang
RE $<$ 1G	24deg. C, 65%RH	120Vac, 60Hz	Tom Yang
PLC	24deg. C, 65%RH	120Vac, 60Hz	Tom Yang
APCM	25deg. C, 60%RH	120Vac, 60Hz	Eric Peng

3.4 Duty Cycle of Test Signal

Duty cycle of test signal is $\geq 98\%$, duty factor is not required.

802.11a: Duty cycle = 1.974 ms/1.994 ms = 0.99

802.11ax (HE20): Duty cycle = 4.687 ms/4.713 ms = 0.994

802.11ax (HE40): Duty cycle = 5.172 ms/5.192 ms = 0.996

802.11ax (HE80): Duty cycle = 2.965 ms/2.988 ms = 0.992

802.11ax (HE160): Duty cycle = 2.157 ms/2.176 ms = 0.991

For Mode 1

20MHz Preamble (RU26): Duty cycle = 5.103 ms /5.125 ms = 0.996

20MHz Preamble (RU52): Duty cycle = 5.111 ms /5.133 ms = 0.996

20MHz Preamble (RU106): Duty cycle = 4.847 ms /4.869 ms = 0.995

20MHz Preamble (RU242): Duty cycle = 4.659 ms /4.685 ms = 0.994

40MHz Preamble (RU26): Duty cycle = 5.105 ms /5.126 ms = 0.996

40MHz Preamble (RU52): Duty cycle = 5.111 ms /5.141 ms = 0.994

40MHz Preamble (RU106): Duty cycle = 4.848 ms /4.885 ms = 0.992

40MHz Preamble (RU242): Duty cycle = 1.158 ms /1.176 ms = 0.985

40MHz Preamble (RU484): Duty cycle = 3.327 ms /3.354 ms = 0.992

80MHz Preamble (RU996): Duty cycle = 1.624 ms /1.645 ms = 0.987

160MHz Preamble (RU1992): Duty cycle = 2.154 ms /2.174 ms = 0.991

For Mode 2

20MHz Preamble (RU26): Duty cycle = 5.104 ms /5.127 ms = 0.996

20MHz Preamble (RU52): Duty cycle = 5.112 ms /5.132 ms = 0.996

20MHz Preamble (RU106): Duty cycle = 4.849 ms /4.874 ms = 0.995

20MHz Preamble (RU242): Duty cycle = 4.667 ms /4.695 ms = 0.995

40MHz Preamble (RU26): Duty cycle = 5.104 ms /5.129 ms = 0.995

40MHz Preamble (RU52): Duty cycle = 5.111 ms /5.132 ms = 0.996

40MHz Preamble (RU106): Duty cycle = 4.847 ms /4.873 ms = 0.995


40MHz Preamble (RU242): Duty cycle = 1.158 ms /1.177 ms = 0.984

40MHz Preamble (RU484): Duty cycle = 3.323 ms /3.347 ms = 0.993


80MHz Preamble (RU996): Duty cycle = 1.626 ms /1.644 ms = 0.989

160MHz Preamble (RU1992): Duty cycle = 2.153 ms /2.172 ms = 0.991


802.11a

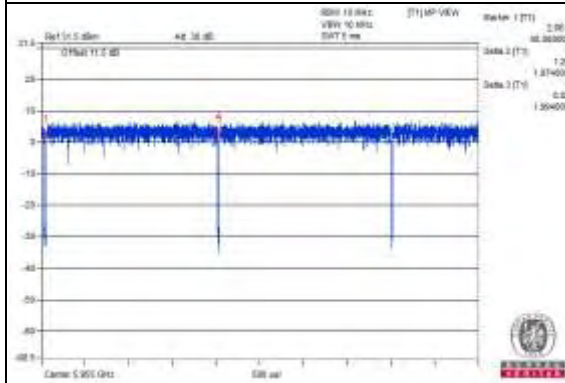


802.11ax (HE20)

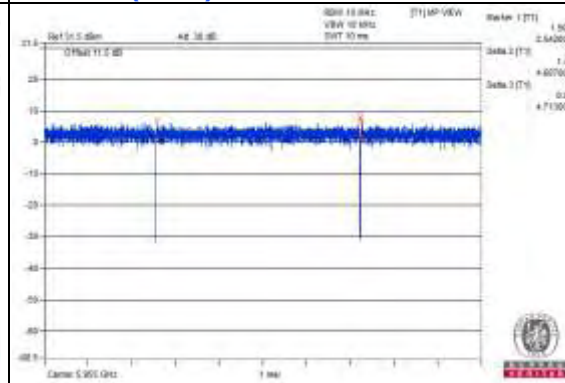


802.11ax (HE40)

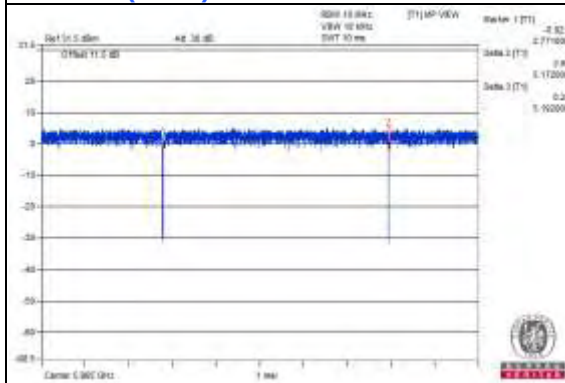

802.11ax (HE80)

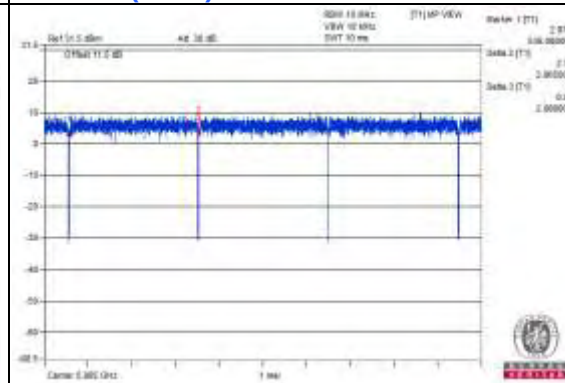


802.11ax (HE160)

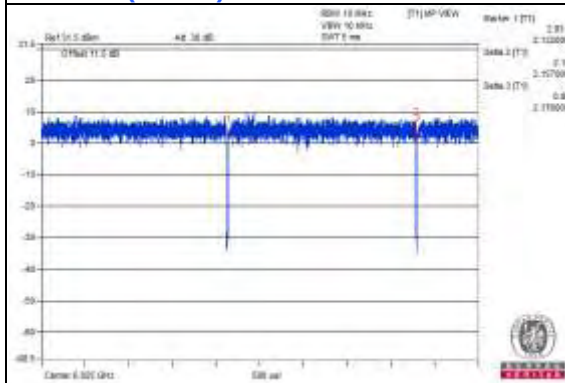


For Mode 1


20MHz Preamble (RU26)_Chain 0

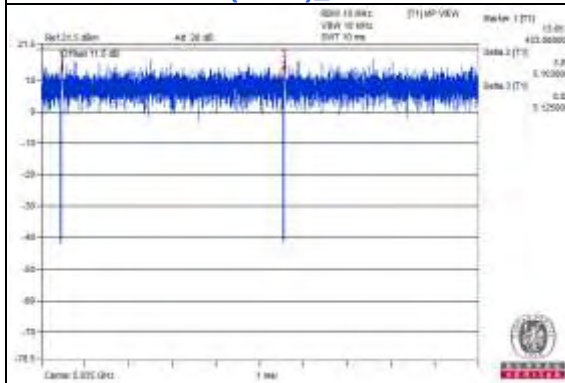


20MHz Preamble (RU26)_Chain 1

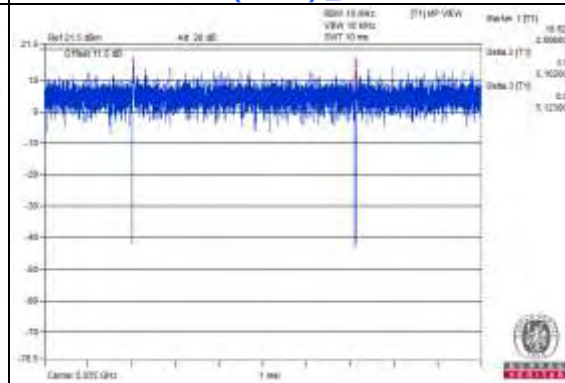


20MHz Preamble (RU52)_Chain 0

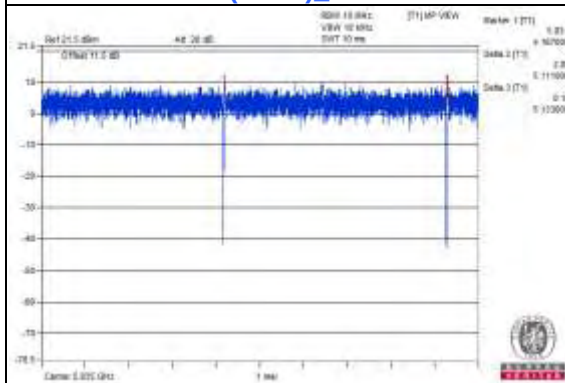


20MHz Preamble (RU52)_Chain 1

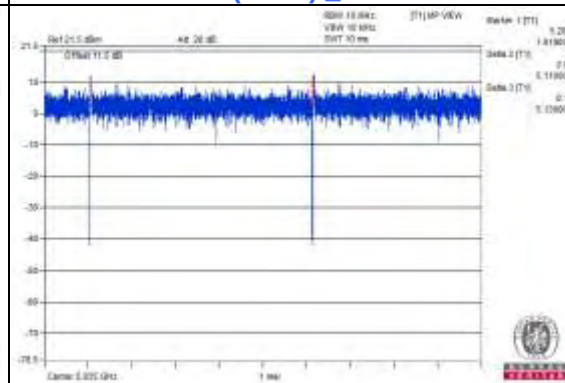


20MHz Preamble (RU106)_Chain 0

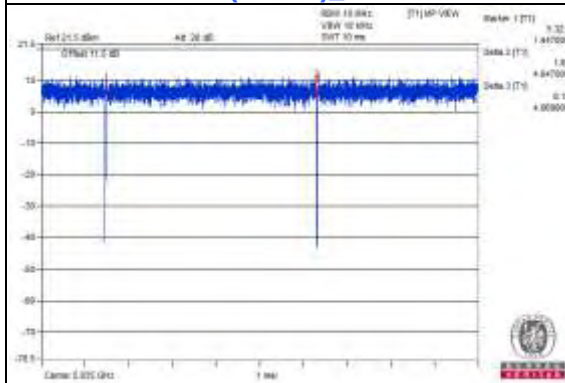


20MHz Preamble (RU26)_Chain 1

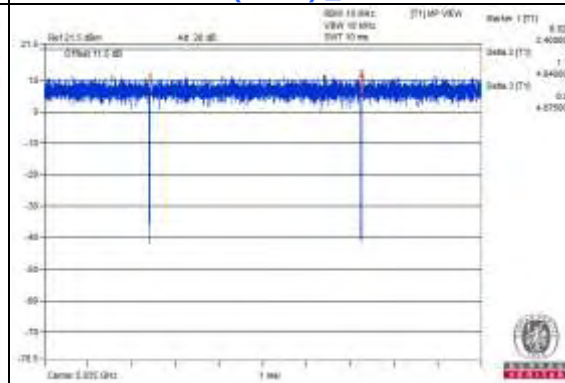


20MHz Preamble (RU242)_Chain 0

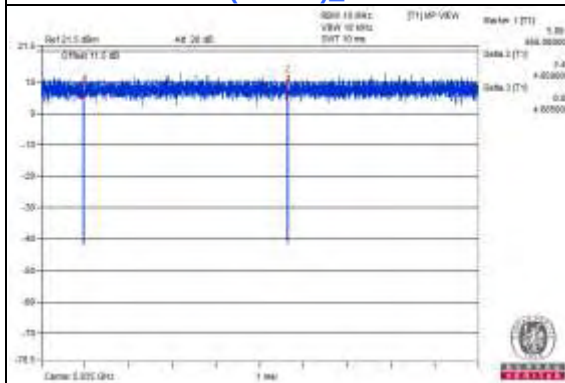


20MHz Preamble (RU242)_Chain 1

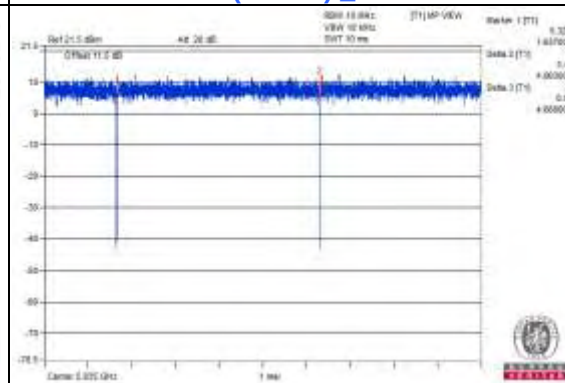


40MHz Preamble (RU26)_Chain 0

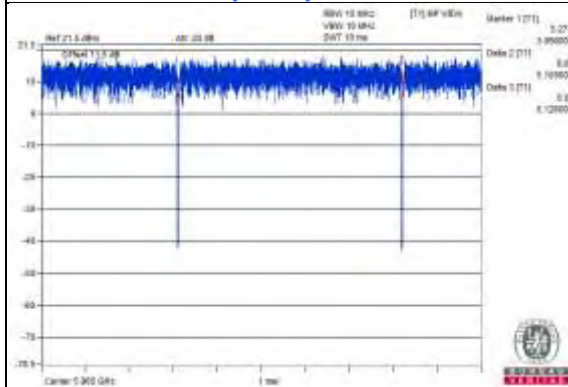


40MHz Preamble (RU26)_Chain 1

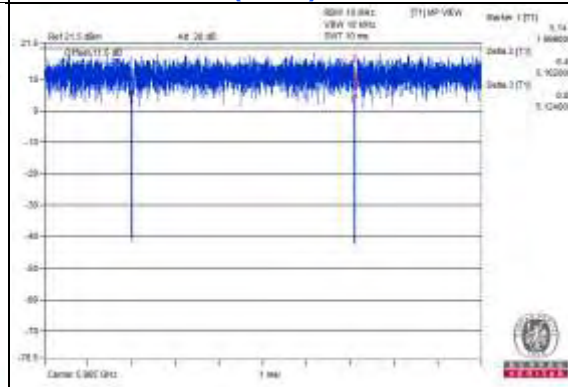


40MHz Preamble (RU52)_Chain 0

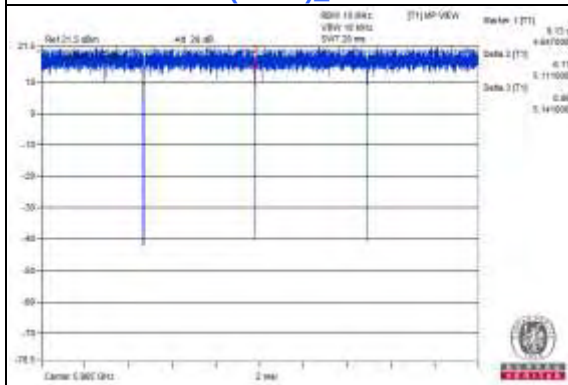


40MHz Preamble (RU52)_Chain 1

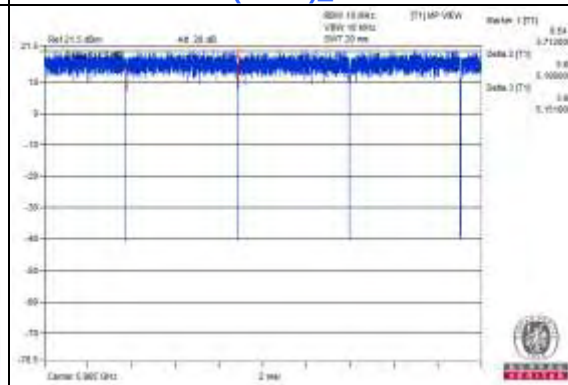


40MHz Preamble (RU106)_Chain 0

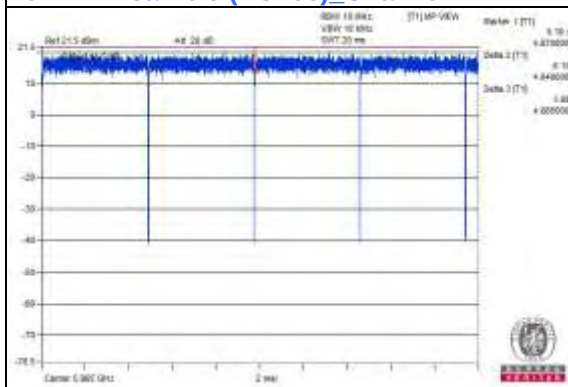


40MHz Preamble (RU106)_Chain 1

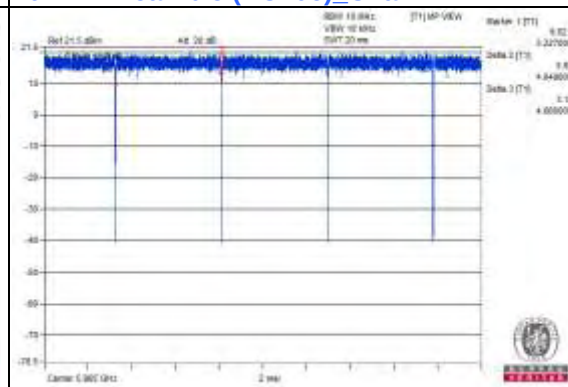


40MHz Preamble (RU242)_Chain 0

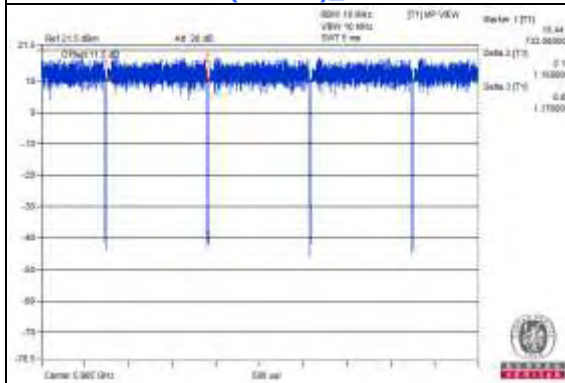


40MHz Preamble (RU242)_Chain 1

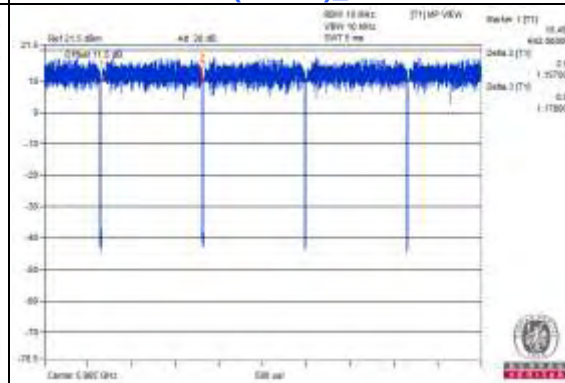


40MHz Preamble (RU484)_Chain 0

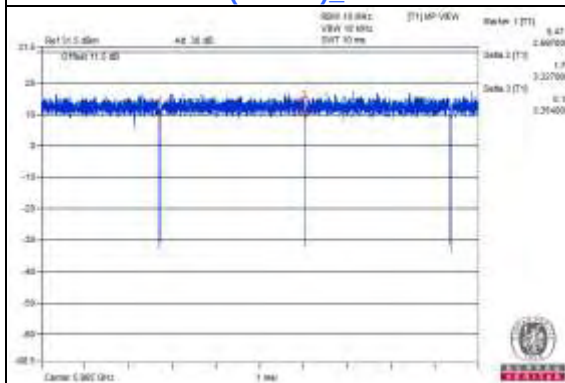


40MHz Preamble (RU484)_Chain 1

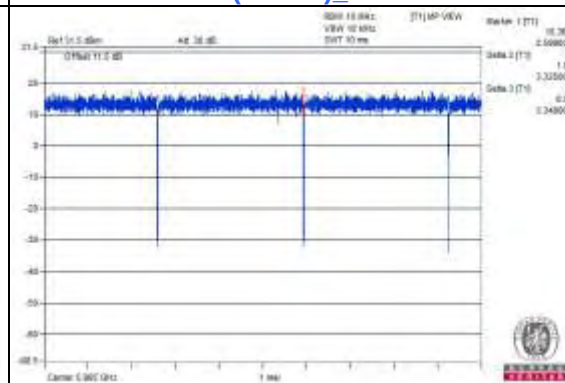



80MHz Preamble (RU996)_Chain 0

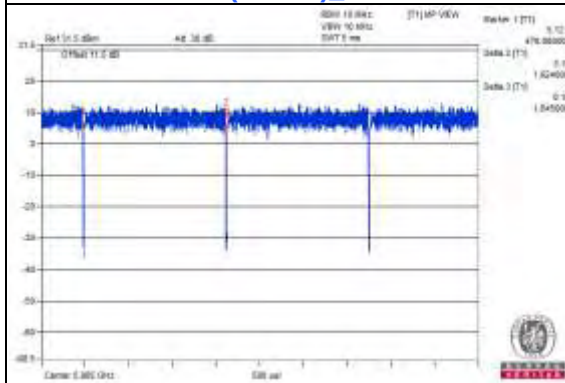

80MHz Preamble (RU996)_Chain 1

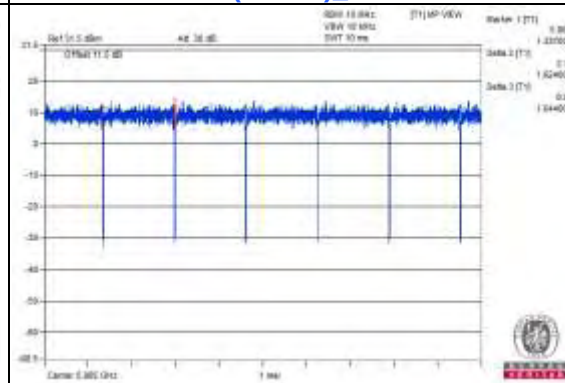


160MHz Preamble (RU1992)

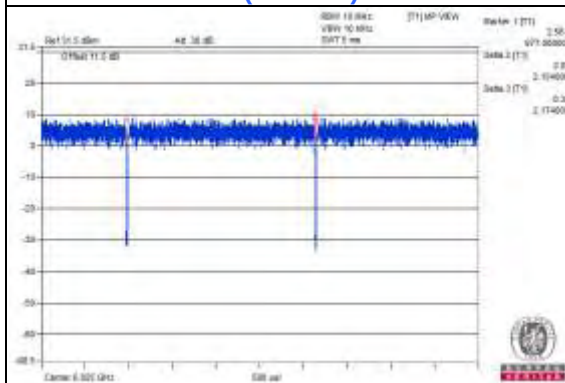


For Mode 2


20MHz Preamble (RU26)

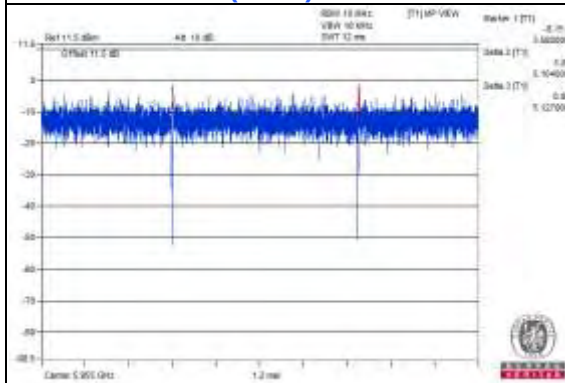


20MHz Preamble (RU52)

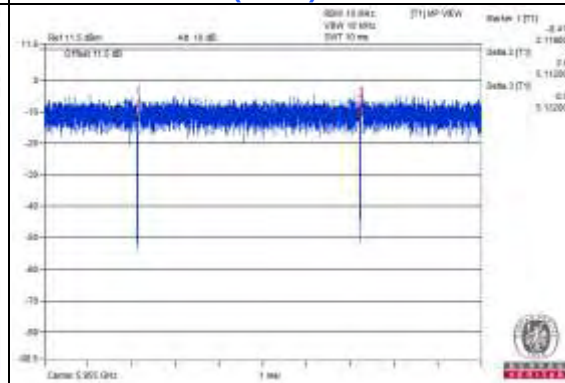


20MHz Preamble (RU106)

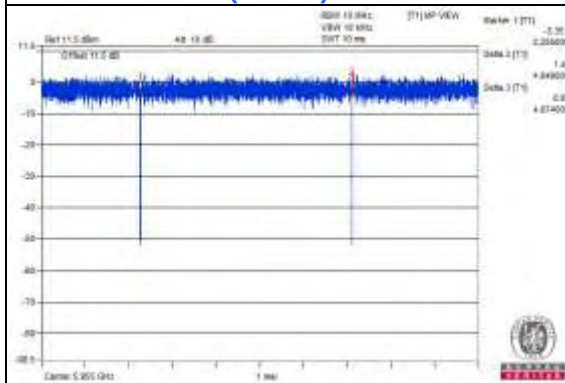


20MHz Preamble (RU242)

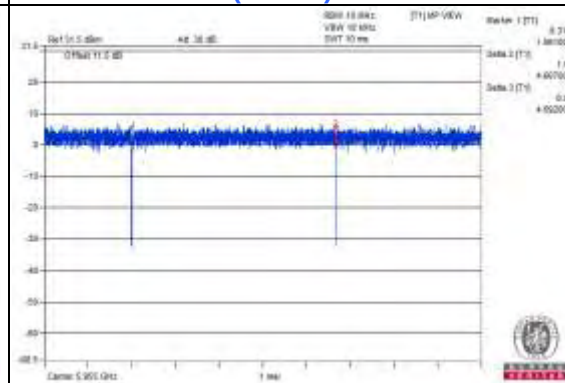


40MHz Preamble (RU26)

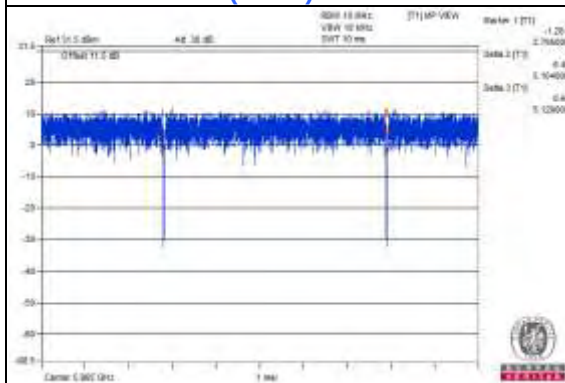


40MHz Preamble (RU52)

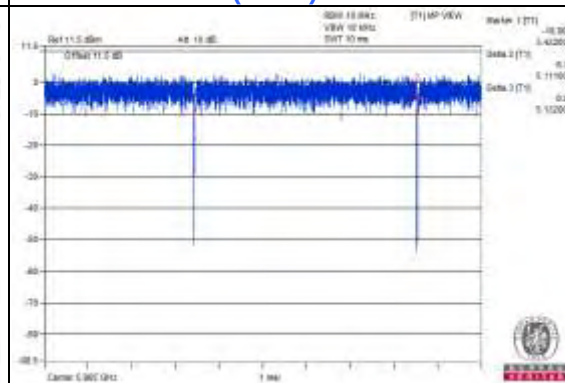


40MHz Preamble (RU106)

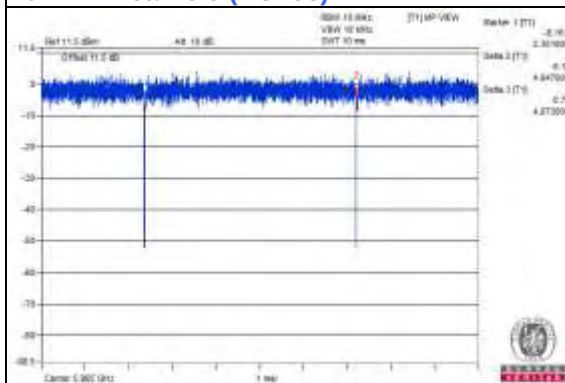


40MHz Preamble (RU242)

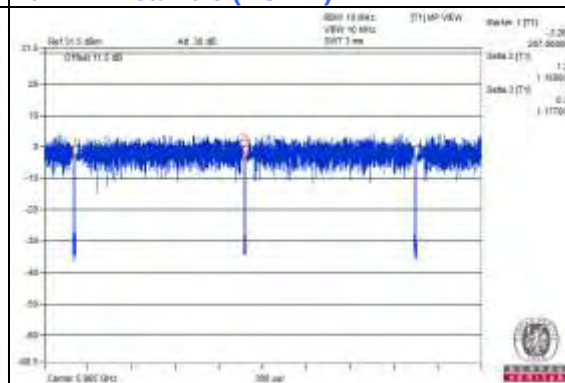


40MHz Preamble (RU484)

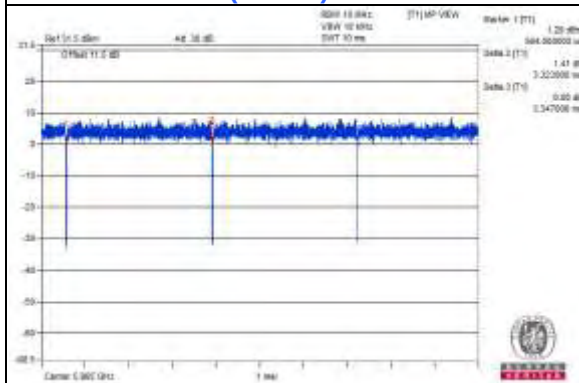

80MHz Preamble (RU996)

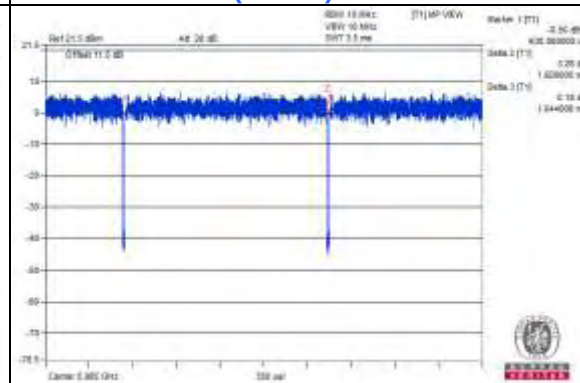

160MHz Preamble (RU1992)

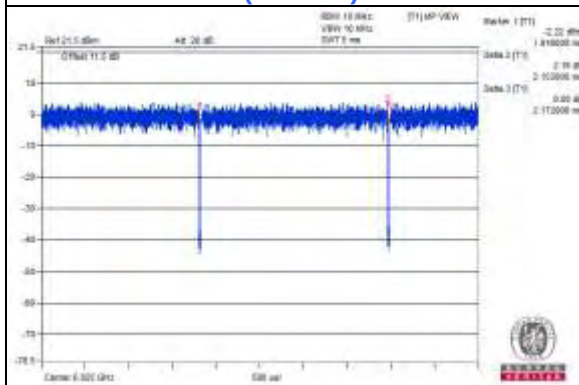

3.5 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	Dell	E5420	6FGHKV1	NA	Provided by Lab
B.	Test Tool	Qualcomm	Y6570	NA	NA	Supplied by client
C.	Adapter	PHIHONG	PSAA12A-120L6	NA	NA	Supplied by client


Note:

1. All power cords of the above support units are non-shielded (1.8m).


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.2	No	0	Supplied by client
2.	USB Cable	1	0.6	No	0	Provided by Lab

3.5.1 Configuration of System under Test

For Conducted Emissions test:

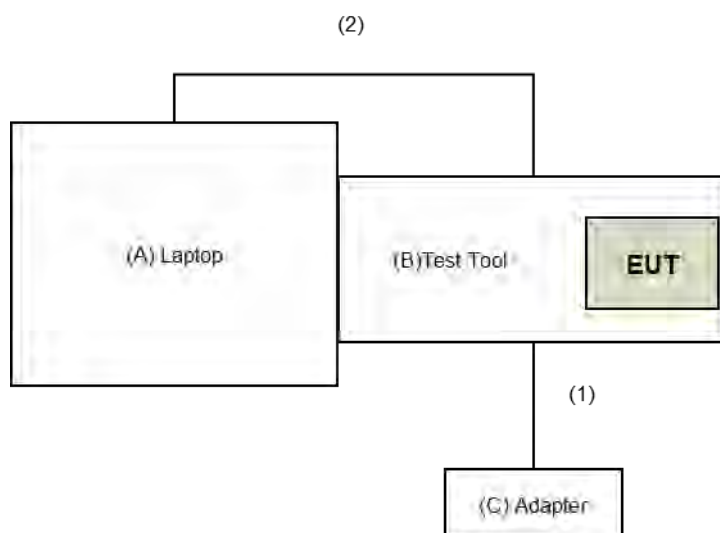

For other test:

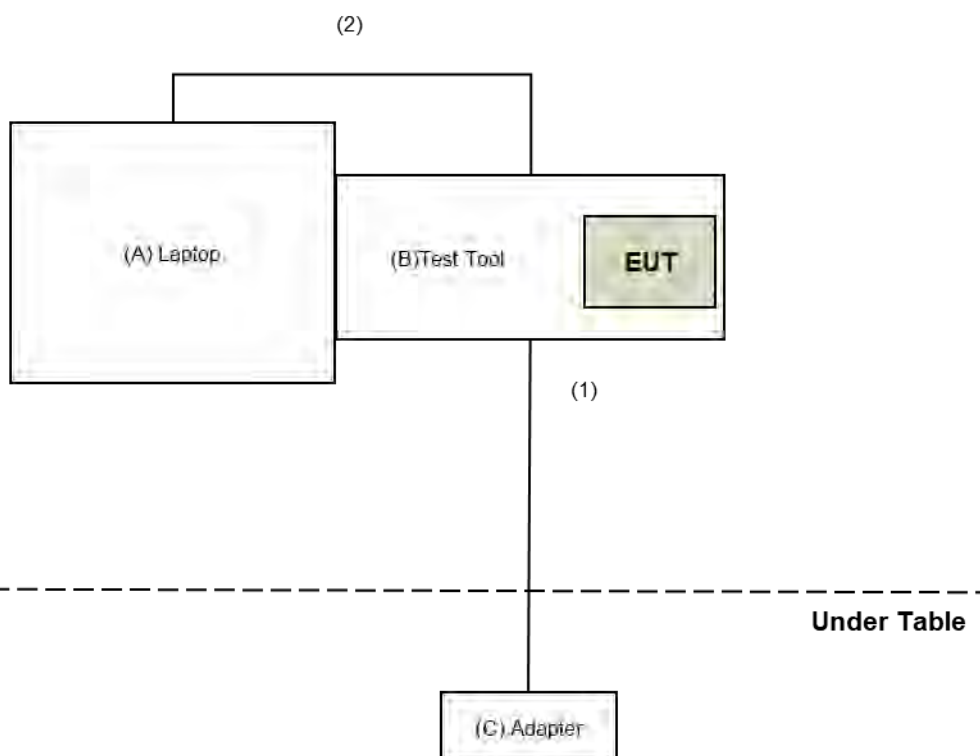

3.6 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart E (15.407)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 987594 D02 EMC Measurement v01r01

KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Frequencies (MHz)	EIRP Limit	Equivalent Field Strength at 3m
5925MHz > F > 7125MHz	Peak: -7 (dBm/MHz)	88.2(dBμV/m)
	Average: -27 (dBm/MHz)	68.2(dBμV/m)

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

4.1.2 Test Instruments

For radiated emission test: (Below 1GHz)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210202	Dec. 01, 2020	Nov. 30, 2021
Pre-Amplifier EMCI	EMC001340	980142	May 25, 2020	May 24, 2021
Loop Antenna Electro-Metrics	EM-6879	264	Mar. 05, 2021	Mar. 04, 2022
RF Cable	5D-FB	LOOPCAB-001	Jan. 07, 2021	Jan. 06, 2022
RF Cable	5D-FB	LOOPCAB-002	Jan. 07, 2021	Jan. 06, 2022
Pre-Amplifier EMCI	EMC330N	980701	Mar. 10, 2021	Mar. 09, 2022
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 06, 2020	Nov. 05, 2021
RF Cable	8D	966-4-1	Mar. 17, 2021	Mar. 16, 2022
RF Cable	8D	966-4-2	Mar. 17, 2021	Mar. 16, 2022
RF Cable	8D	966-4-3	Mar. 17, 2021	Mar. 16, 2022
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-03	Jan. 11, 2021	Jan. 10, 2022
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Loop antenna was used for all emissions below 30 MHz.
4. Tested Date: Mar. 20, 2021

For radiated emission test: (Above 1GHz)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210202	Dec. 01, 2020	Nov. 30, 2021
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 22, 2020	Nov. 21, 2021
Pre-Amplifier EMCI	EMC 12630 SE	980638	Apr. 08, 2020	Apr. 07, 2021
RF Cable	EMC104-SM-SM-1200	160922	Dec. 25, 2020	Dec. 24, 2021
RF Cable	EMC104-SM-SM-2000	180502	Apr. 29, 2020	Apr. 28, 2021
RF Cable	EMC104-SM-SM-6000	180418	Apr. 29, 2020	Apr. 28, 2021
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 11, 2021	Jan. 10, 2022
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 22, 2020	Nov. 21, 2021
RF Cable	EMC102-KM-KM-1200	160924	Jan. 11, 2021	Jan. 10, 2022
RF Cable	EMC-KM-KM-4000	200214	Mar. 10, 2021	Mar. 09, 2022
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Tested Date: Mar. 13 to 16, 2021

For other test items:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Power meter Anritsu	ML2495A	1529002	July 22, 2020	July 21, 2021
Power sensor Anritsu	MA2411B	1339443	July 22, 2020	July 21, 2021
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
DC Power Supply Topward	6603D	795558	NA	NA
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	Jan. 14, 2021	Jan. 13, 2022
True RMS Clamp Meter FLUKE	325	31130711WS	June 06, 2020	June 05, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- NOTE:**
1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: Feb. 03, 2021

4.1.3 Test Procedure

Following FCC KDB 789033 D02 General UNII Test Procedures:

Radiated versus Conducted Measurements.

The unwanted emission limits in both the restricted and non-restricted bands are based on antenna-port conducted measurements in conjunction with cabinet emissions tests are permitted to demonstrate compliance.

The following steps was performed:

- a. Cabinet emissions measurements. Radiated measurement was performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna was replaced by a termination matching the nominal impedance of the antenna.
- b. Conducted tests was performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT.
- c. EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater.
- d. EIRP adjustments for multiple outputs. (Follow the procedures specified in FCC KDB Publication 662911)
- e. For all of Radiation emission test

For Radiated emission below 30MHz

- e-1.1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- e-1.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- e-1.3. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- e-1.4. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e-1.5. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.
2. KDB 414788 OATS and Chamber Correlation Justification
 - Based on FCC 15.31(f)(2) : measurements may be performed at a distance closer than that specified in the regulations; however, an attempts should be made to avoid making measurements in the near field.
 - OATs and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

For Radiated emission above 30MHz

- e-2.1. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- e-2.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- e-2.3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e-2.4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e-2.5. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- e-2.6. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.


4.1.4 Test Setup

For radiated configuration:


For Radiated emission below 30MHz

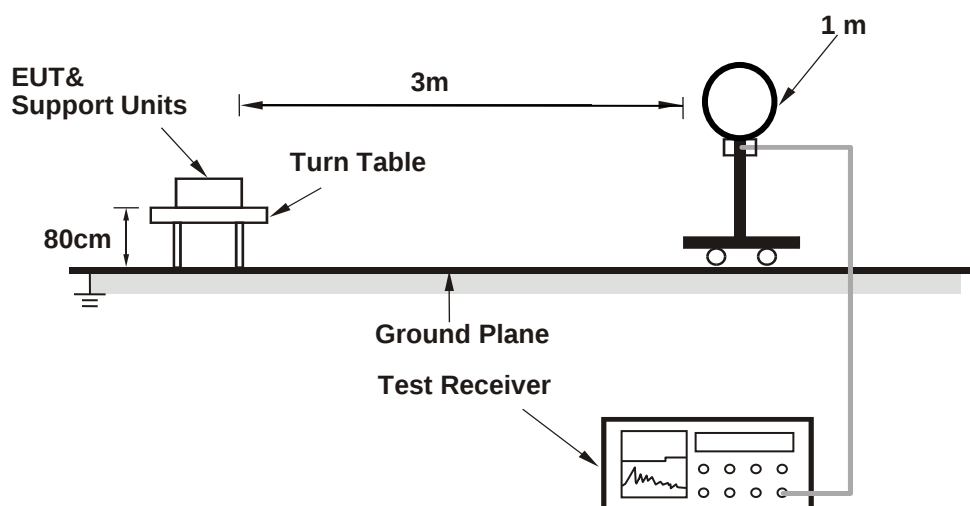


For Radiated emission 30MHz to 1GHz

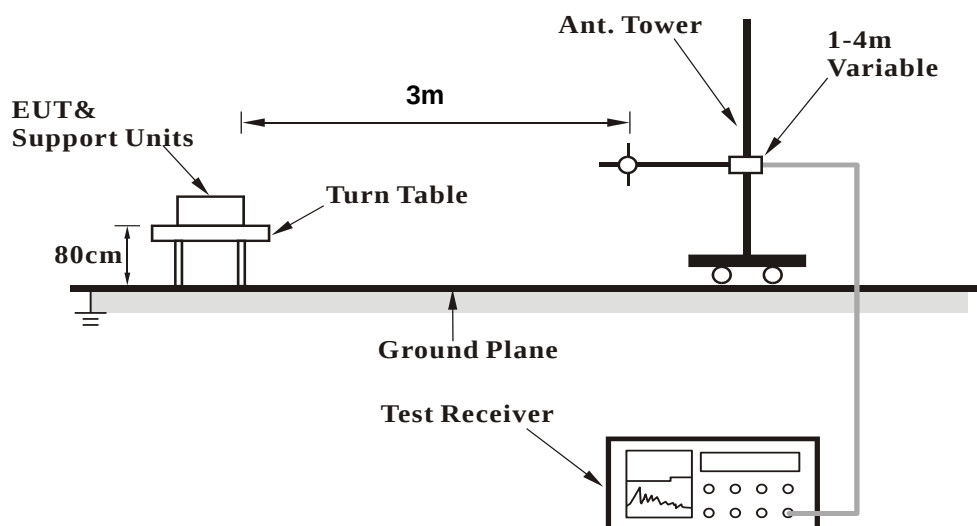

For Radiated emission above 1GHz

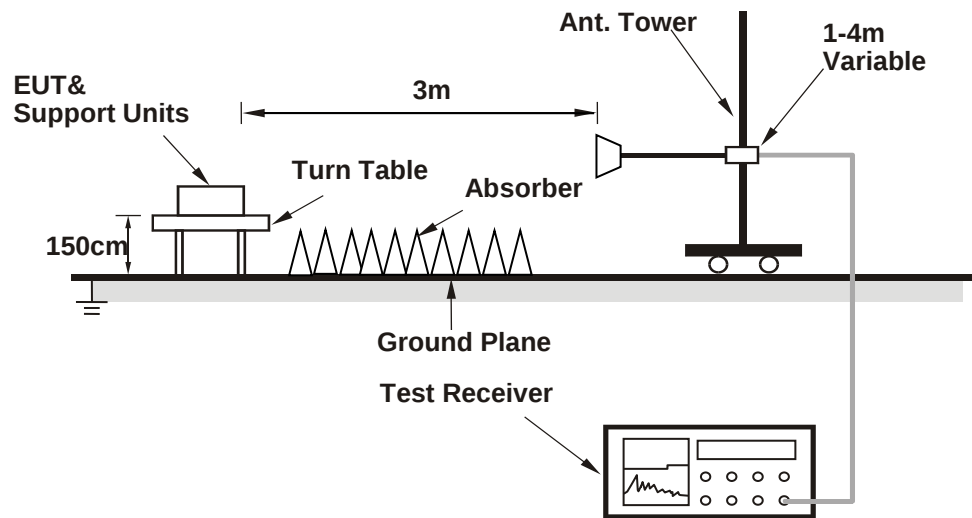

For conducted configuration:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.5 EUT Operating Condition

- Connected the EUT with the Laptop which is placed on the testing table.
- Controlling software (QRCT 4.0.00177.0) has been activated to set the EUT under transmission condition continuously.

4.1.6 Test Results (Radiated Measurement)

Radiated versus Conducted Measurement	
☐ Conducted measurement	☒ Radiated measurement
<u>For Radiated measurement:</u> The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation) <u>For Conducted measurement:</u> The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).	

4.1.7 Test Results (Mode 1)

Radiated test was done with 50ohm terminator on antenna port

Above 1GHz Data:

RF Mode	TX 802.11a 6G	Channel	CH 2 : 5935 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	39.1 PK	74.0	-34.9	1.56 H	230	27.7	11.4
2	11870.00	28.2 AV	54.0	-25.8	1.56 H	230	16.8	11.4
3	17805.00	46.7 PK	74.0	-27.3	1.75 H	45	26.2	20.5
4	17805.00	34.8 AV	54.0	-19.2	1.75 H	45	14.3	20.5
5	23740.00	48.0 PK	74.0	-26.0	2.06 H	111	51.3	-3.3
6	23740.00	37.0 AV	54.0	-17.0	2.06 H	111	40.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	38.9 PK	74.0	-35.1	1.68 V	90	27.5	11.4
2	11870.00	27.6 AV	54.0	-26.4	1.68 V	90	16.2	11.4
3	17805.00	54.1 PK	74.0	-19.9	2.17 V	101	33.6	20.5
4	17805.00	40.1 AV	54.0	-13.9	2.17 V	101	19.6	20.5
5	23740.00	45.5 PK	74.0	-28.5	1.99 V	168	48.8	-3.3
6	23740.00	35.2 AV	54.0	-18.8	1.99 V	168	38.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11a 6G	Channel	CH 1 : 5955 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	39.7 PK	74.0	-34.3	1.63 H	244	28.2	11.5
2	11910.00	28.4 AV	54.0	-25.6	1.63 H	244	16.9	11.5
3	17865.00	47.5 PK	74.0	-26.5	1.76 H	52	25.9	21.6
4	17865.00	35.6 AV	54.0	-18.4	1.76 H	52	14.0	21.6
5	23820.00	47.8 PK	74.0	-26.2	2.11 H	113	51.1	-3.3
6	23820.00	37.1 AV	54.0	-16.9	2.11 H	113	40.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	39.1 PK	74.0	-34.9	1.69 V	79	27.6	11.5
2	11910.00	27.7 AV	54.0	-26.3	1.69 V	79	16.2	11.5
3	17865.00	54.6 PK	74.0	-19.4	2.14 V	86	33.0	21.6
4	17865.00	40.6 AV	54.0	-13.4	2.14 V	86	19.0	21.6
5	23820.00	45.7 PK	74.0	-28.3	2.00 V	181	49.0	-3.3
6	23820.00	35.5 AV	54.0	-18.5	2.00 V	181	38.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11a 6G	Channel	CH 45 : 6175 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	39.2 PK	74.0	-34.8	1.59 H	238	28.6	10.6
2	12350.00	28.2 AV	54.0	-25.8	1.59 H	238	17.6	10.6
3	18525.00	47.6 PK	74.0	-26.4	1.73 H	56	54.2	-6.6
4	18525.00	35.5 AV	54.0	-18.5	1.73 H	56	42.1	-6.6
5	#24700.00	47.7 PK	88.2	-40.5	2.03 H	131	49.8	-2.1
6	#24700.00	37.0 AV	68.2	-31.2	2.03 H	131	39.1	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	38.9 PK	74.0	-35.1	1.70 V	89	28.3	10.6
2	12350.00	27.7 AV	54.0	-26.3	1.70 V	89	17.1	10.6
3	18525.00	53.9 PK	74.0	-20.1	2.22 V	103	60.5	-6.6
4	18525.00	39.7 AV	54.0	-14.3	2.22 V	103	46.3	-6.6
5	#24700.00	45.7 PK	88.2	-42.5	1.99 V	177	47.8	-2.1
6	#24700.00	35.5 AV	68.2	-32.7	1.99 V	177	37.6	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 93 : 6415 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	39.5 PK	88.2	-48.7	1.55 H	233	28.7	10.8
2	#12830.00	28.3 AV	68.2	-39.9	1.55 H	233	17.5	10.8
3	19245.00	47.1 PK	74.0	-26.9	1.68 H	42	53.7	-6.6
4	19245.00	35.0 AV	54.0	-19.0	1.68 H	42	41.6	-6.6
5	#25660.00	48.5 PK	88.2	-39.7	2.05 H	116	49.8	-1.3
6	#25660.00	37.5 AV	68.2	-30.7	2.05 H	116	38.8	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	38.8 PK	88.2	-49.4	1.73 V	92	28.0	10.8
2	#12830.00	27.2 AV	68.2	-41.0	1.73 V	92	16.4	10.8
3	19245.00	53.6 PK	74.0	-20.4	2.14 V	102	60.2	-6.6
4	19245.00	39.8 AV	54.0	-14.2	2.14 V	102	46.4	-6.6
5	#25660.00	45.3 PK	88.2	-42.9	1.99 V	159	46.6	-1.3
6	#25660.00	35.3 AV	68.2	-32.9	1.99 V	159	36.6	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 117 : 6535 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	40.3 PK	88.2	-47.9	1.53 H	225	29.2	11.1
2	#13070.00	29.0 AV	68.2	-39.2	1.53 H	225	17.9	11.1
3	19605.00	46.8 PK	74.0	-27.2	1.71 H	53	53.0	-6.2
4	19605.00	35.1 AV	54.0	-18.9	1.71 H	53	41.3	-6.2
5	#26140.00	48.2 PK	88.2	-40.0	2.05 H	111	49.2	-1.0
6	#26140.00	37.1 AV	68.2	-31.1	2.05 H	111	38.1	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	39.6 PK	88.2	-48.6	1.63 V	75	28.5	11.1
2	#13070.00	28.1 AV	68.2	-40.1	1.63 V	75	17.0	11.1
3	19605.00	53.9 PK	74.0	-20.1	2.14 V	89	60.1	-6.2
4	19605.00	39.6 AV	54.0	-14.4	2.14 V	89	45.8	-6.2
5	#26140.00	45.8 PK	88.2	-42.4	1.98 V	182	46.8	-1.0
6	#26140.00	35.4 AV	68.2	-32.8	1.98 V	182	36.4	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 149 : 6695 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	39.5 PK	74.0	-34.5	1.52 H	224	27.2	12.3
2	13390.00	28.1 AV	54.0	-25.9	1.52 H	224	15.8	12.3
3	20085.00	46.7 PK	74.0	-27.3	1.71 H	48	52.4	-5.7
4	20085.00	34.9 AV	54.0	-19.1	1.71 H	48	40.6	-5.7
5	#26780.00	48.8 PK	88.2	-39.4	2.08 H	134	49.4	-0.6
6	#26780.00	37.5 AV	68.2	-30.7	2.08 H	134	38.1	-0.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	39.0 PK	74.0	-35.0	1.65 V	81	26.7	12.3
2	13390.00	27.4 AV	54.0	-26.6	1.65 V	81	15.1	12.3
3	20085.00	54.6 PK	74.0	-19.4	2.15 V	91	60.3	-5.7
4	20085.00	40.5 AV	54.0	-13.5	2.15 V	91	46.2	-5.7
5	#26780.00	44.8 PK	88.2	-43.4	2.02 V	177	45.4	-0.6
6	#26780.00	34.7 AV	68.2	-33.5	2.02 V	177	35.3	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 181 : 6855 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	39.4 PK	88.2	-48.8	1.54 H	224	26.3	13.1
2	#13710.00	28.3 AV	68.2	-39.9	1.54 H	224	15.2	13.1
3	20565.00	47.2 PK	74.0	-26.8	1.71 H	38	52.3	-5.1
4	20565.00	35.3 AV	54.0	-18.7	1.71 H	38	40.4	-5.1
5	#27420.00	48.2 PK	88.2	-40.0	2.10 H	105	49.7	-1.5
6	#27420.00	37.1 AV	68.2	-31.1	2.10 H	105	38.6	-1.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	38.8 PK	88.2	-49.4	1.72 V	81	25.7	13.1
2	#13710.00	27.4 AV	68.2	-40.8	1.72 V	81	14.3	13.1
3	20565.00	53.8 PK	74.0	-20.2	2.18 V	109	58.9	-5.1
4	20565.00	39.7 AV	54.0	-14.3	2.18 V	109	44.8	-5.1
5	#27420.00	45.4 PK	88.2	-42.8	2.04 V	181	46.9	-1.5
6	#27420.00	35.1 AV	68.2	-33.1	2.04 V	181	36.6	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 2 : 5935 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	41.8 PK	74.0	-32.2	1.46 H	344	30.4	11.4
2	11870.00	30.0 AV	54.0	-24.0	1.46 H	344	18.6	11.4
3	17805.00	45.9 PK	74.0	-28.1	1.55 H	7	25.4	20.5
4	17805.00	34.2 AV	54.0	-19.8	1.55 H	7	13.7	20.5
5	23740.00	48.8 PK	74.0	-25.2	2.02 H	59	52.1	-3.3
6	23740.00	37.3 AV	54.0	-16.7	2.02 H	59	40.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	41.7 PK	74.0	-32.3	3.79 V	113	30.3	11.4
2	11870.00	29.7 AV	54.0	-24.3	3.79 V	113	18.3	11.4
3	17805.00	44.1 PK	74.0	-29.9	2.17 V	109	23.6	20.5
4	17805.00	31.0 AV	54.0	-23.0	2.17 V	109	10.5	20.5
5	23740.00	46.1 PK	74.0	-27.9	1.94 V	156	49.4	-3.3
6	23740.00	35.4 AV	54.0	-18.6	1.94 V	156	38.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE20)	Channel	CH 1 : 5955 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	41.8 PK	74.0	-32.2	1.45 H	337	30.3	11.5
2	11910.00	30.0 AV	54.0	-24.0	1.45 H	337	18.5	11.5
3	17865.00	46.1 PK	74.0	-27.9	1.55 H	13	24.5	21.6
4	17865.00	34.2 AV	54.0	-19.8	1.55 H	13	12.6	21.6
5	23820.00	49.1 PK	74.0	-24.9	2.06 H	66	52.4	-3.3
6	23820.00	37.8 AV	54.0	-16.2	2.06 H	66	41.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	41.9 PK	74.0	-32.1	3.83 V	104	30.4	11.5
2	11910.00	29.6 AV	54.0	-24.4	3.83 V	104	18.1	11.5
3	17865.00	44.3 PK	74.0	-29.7	2.13 V	124	22.7	21.6
4	17865.00	31.1 AV	54.0	-22.9	2.13 V	124	9.5	21.6
5	23820.00	45.8 PK	74.0	-28.2	1.96 V	166	49.1	-3.3
6	23820.00	35.0 AV	54.0	-19.0	1.96 V	166	38.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE20)	Channel	CH 45 : 6175 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	42.1 PK	74.0	-31.9	1.52 H	343	31.5	10.6
2	12350.00	30.1 AV	54.0	-23.9	1.52 H	343	19.5	10.6
3	18525.00	45.9 PK	74.0	-28.1	1.58 H	4	52.5	-6.6
4	18525.00	34.0 AV	54.0	-20.0	1.58 H	4	40.6	-6.6
5	#24700.00	49.1 PK	88.2	-39.1	1.96 H	61	51.2	-2.1
6	#24700.00	37.6 AV	68.2	-30.6	1.96 H	61	39.7	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	41.2 PK	74.0	-32.8	3.77 V	122	30.6	10.6
2	12350.00	29.4 AV	54.0	-24.6	3.77 V	122	18.8	10.6
3	18525.00	44.2 PK	74.0	-29.8	2.15 V	123	50.8	-6.6
4	18525.00	30.9 AV	54.0	-23.1	2.15 V	123	37.5	-6.6
5	#24700.00	45.8 PK	88.2	-42.4	2.00 V	155	47.9	-2.1
6	#24700.00	34.9 AV	68.2	-33.3	2.00 V	155	37.0	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 93 : 6415 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	41.5 PK	88.2	-46.7	1.49 H	333	30.7	10.8
2	#12830.00	29.8 AV	68.2	-38.4	1.49 H	333	19.0	10.8
3	19245.00	45.9 PK	74.0	-28.1	1.52 H	5	52.5	-6.6
4	19245.00	34.4 AV	54.0	-19.6	1.52 H	5	41.0	-6.6
5	#25660.00	48.7 PK	88.2	-39.5	2.05 H	72	50.0	-1.3
6	#25660.00	37.3 AV	68.2	-30.9	2.05 H	72	38.6	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	41.3 PK	88.2	-46.9	3.82 V	128	30.5	10.8
2	#12830.00	29.5 AV	68.2	-38.7	3.82 V	128	18.7	10.8
3	19245.00	44.0 PK	74.0	-30.0	2.14 V	125	50.6	-6.6
4	19245.00	31.1 AV	54.0	-22.9	2.14 V	125	37.7	-6.6
5	#25660.00	46.8 PK	88.2	-41.4	1.95 V	145	48.1	-1.3
6	#25660.00	35.9 AV	68.2	-32.3	1.95 V	145	37.2	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 117 : 6535 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	41.9 PK	88.2	-46.3	1.50 H	360	30.8	11.1
2	#13070.00	30.0 AV	68.2	-38.2	1.50 H	360	18.9	11.1
3	19605.00	45.7 PK	74.0	-28.3	1.49 H	7	51.9	-6.2
4	19605.00	34.0 AV	54.0	-20.0	1.49 H	7	40.2	-6.2
5	#26140.00	49.1 PK	88.2	-39.1	2.06 H	58	50.1	-1.0
6	#26140.00	37.4 AV	68.2	-30.8	2.06 H	58	38.4	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	41.9 PK	88.2	-46.3	3.81 V	107	30.8	11.1
2	#13070.00	29.9 AV	68.2	-38.3	3.81 V	107	18.8	11.1
3	19605.00	44.0 PK	74.0	-30.0	2.22 V	116	50.2	-6.2
4	19605.00	30.7 AV	54.0	-23.3	2.22 V	116	36.9	-6.2
5	#26140.00	46.8 PK	88.2	-41.4	1.94 V	161	47.8	-1.0
6	#26140.00	35.9 AV	68.2	-32.3	1.94 V	161	36.9	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 149 : 6695 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	42.4 PK	74.0	-31.6	1.50 H	331	30.1	12.3
2	13390.00	30.5 AV	54.0	-23.5	1.50 H	331	18.2	12.3
3	20085.00	45.7 PK	74.0	-28.3	1.59 H	6	51.4	-5.7
4	20085.00	34.3 AV	54.0	-19.7	1.59 H	6	40.0	-5.7
5	#26780.00	49.2 PK	88.2	-39.0	2.02 H	49	49.8	-0.6
6	#26780.00	37.7 AV	68.2	-30.5	2.02 H	49	38.3	-0.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	41.6 PK	74.0	-32.4	3.78 V	103	29.3	12.3
2	13390.00	29.6 AV	54.0	-24.4	3.78 V	103	17.3	12.3
3	20085.00	44.5 PK	74.0	-29.5	2.14 V	112	50.2	-5.7
4	20085.00	31.3 AV	54.0	-22.7	2.14 V	112	37.0	-5.7
5	#26780.00	46.6 PK	88.2	-41.6	1.94 V	165	47.2	-0.6
6	#26780.00	35.8 AV	68.2	-32.4	1.94 V	165	36.4	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 181 : 6855 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	42.1 PK	88.2	-46.1	1.42 H	346	29.0	13.1
2	#13710.00	30.4 AV	68.2	-37.8	1.42 H	346	17.3	13.1
3	20565.00	46.1 PK	74.0	-27.9	1.59 H	6	51.2	-5.1
4	20565.00	34.1 AV	54.0	-19.9	1.59 H	6	39.2	-5.1
5	#27420.00	48.9 PK	88.2	-39.3	2.06 H	65	50.4	-1.5
6	#27420.00	37.6 AV	68.2	-30.6	2.06 H	65	39.1	-1.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	41.7 PK	88.2	-46.5	3.73 V	105	28.6	13.1
2	#13710.00	29.7 AV	68.2	-38.5	3.73 V	105	16.6	13.1
3	20565.00	44.7 PK	74.0	-29.3	2.11 V	111	49.8	-5.1
4	20565.00	31.4 AV	54.0	-22.6	2.11 V	111	36.5	-5.1
5	#27420.00	46.3 PK	88.2	-41.9	1.96 V	161	47.8	-1.5
6	#27420.00	35.6 AV	68.2	-32.6	1.96 V	161	37.1	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 3 : 5965 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	41.1 PK	74.0	-32.9	1.51 H	328	29.6	11.5
2	11930.00	30.0 AV	54.0	-24.0	1.51 H	328	18.5	11.5
3	17895.00	46.0 PK	74.0	-28.0	1.54 H	1	23.9	22.1
4	17895.00	34.6 AV	54.0	-19.4	1.54 H	1	12.5	22.1
5	23860.00	50.1 PK	74.0	-23.9	2.18 H	32	53.4	-3.3
6	23860.00	38.2 AV	54.0	-15.8	2.18 H	32	41.5	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	41.4 PK	74.0	-32.6	3.66 V	83	29.9	11.5
2	11930.00	29.3 AV	54.0	-24.7	3.66 V	83	17.8	11.5
3	17895.00	44.3 PK	74.0	-29.7	2.22 V	131	22.2	22.1
4	17895.00	31.3 AV	54.0	-22.7	2.22 V	131	9.2	22.1
5	23860.00	47.0 PK	74.0	-27.0	1.85 V	118	50.3	-3.3
6	23860.00	35.3 AV	54.0	-18.7	1.85 V	118	38.6	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE40)	Channel	CH 43 : 6165 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	41.2 PK	74.0	-32.8	1.42 H	345	30.5	10.7
2	12330.00	29.6 AV	54.0	-24.4	1.42 H	345	18.9	10.7
3	18495.00	45.8 PK	74.0	-28.2	1.51 H	1	52.4	-6.6
4	18495.00	33.9 AV	54.0	-20.1	1.51 H	1	40.5	-6.6
5	#24660.00	49.9 PK	88.2	-38.3	2.17 H	44	52.0	-2.1
6	#24660.00	38.0 AV	68.2	-30.2	2.17 H	44	40.1	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	41.0 PK	74.0	-33.0	3.69 V	84	30.3	10.7
2	12330.00	29.0 AV	54.0	-25.0	3.69 V	84	18.3	10.7
3	18495.00	44.3 PK	74.0	-29.7	2.22 V	111	50.9	-6.6
4	18495.00	31.2 AV	54.0	-22.8	2.22 V	111	37.8	-6.6
5	#24660.00	46.7 PK	88.2	-41.5	1.83 V	142	48.8	-2.1
6	#24660.00	35.3 AV	68.2	-32.9	1.83 V	142	37.4	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 91 : 6405 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	41.5 PK	88.2	-46.7	1.50 H	335	30.7	10.8
2	#12810.00	30.0 AV	68.2	-38.2	1.50 H	335	19.2	10.8
3	19215.00	45.4 PK	74.0	-28.6	1.60 H	7	51.9	-6.5
4	19215.00	33.8 AV	54.0	-20.2	1.60 H	7	40.3	-6.5
5	#25620.00	49.8 PK	88.2	-38.4	2.14 H	57	51.1	-1.3
6	#25620.00	38.1 AV	68.2	-30.1	2.14 H	57	39.4	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	41.1 PK	88.2	-47.1	3.68 V	110	30.3	10.8
2	#12810.00	29.0 AV	68.2	-39.2	3.68 V	110	18.2	10.8
3	19215.00	44.7 PK	74.0	-29.3	2.14 V	111	51.2	-6.5
4	19215.00	31.4 AV	54.0	-22.6	2.14 V	111	37.9	-6.5
5	#25620.00	46.3 PK	88.2	-41.9	1.85 V	120	47.6	-1.3
6	#25620.00	35.0 AV	68.2	-33.2	1.85 V	120	36.3	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 123 : 6565 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	41.7 PK	88.2	-46.5	1.51 H	346	30.3	11.4
2	#13130.00	30.0 AV	68.2	-38.2	1.51 H	346	18.6	11.4
3	19695.00	46.3 PK	74.0	-27.7	1.51 H	5	52.5	-6.2
4	19695.00	34.4 AV	54.0	-19.6	1.51 H	5	40.6	-6.2
5	#26260.00	49.4 PK	88.2	-38.8	2.15 H	33	50.4	-1.0
6	#26260.00	37.7 AV	68.2	-30.5	2.15 H	33	38.7	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	40.5 PK	88.2	-47.7	3.70 V	82	29.1	11.4
2	#13130.00	28.7 AV	68.2	-39.5	3.70 V	82	17.3	11.4
3	19695.00	44.0 PK	74.0	-30.0	2.15 V	108	50.2	-6.2
4	19695.00	31.2 AV	54.0	-22.8	2.15 V	108	37.4	-6.2
5	#26260.00	46.6 PK	88.2	-41.6	1.84 V	144	47.6	-1.0
6	#26260.00	34.9 AV	68.2	-33.3	1.84 V	144	35.9	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 155 : 6725 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	41.7 PK	88.2	-46.5	1.44 H	348	29.1	12.6
2	#13450.00	30.1 AV	68.2	-38.1	1.44 H	348	17.5	12.6
3	20175.00	46.4 PK	74.0	-27.6	1.53 H	28	51.8	-5.4
4	20175.00	34.6 AV	54.0	-19.4	1.53 H	28	40.0	-5.4
5	#26900.00	50.1 PK	88.2	-38.1	2.18 H	52	51.1	-1.0
6	#26900.00	38.3 AV	68.2	-29.9	2.18 H	52	39.3	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	40.5 PK	88.2	-47.7	3.65 V	98	27.9	12.6
2	#13450.00	28.5 AV	68.2	-39.7	3.65 V	98	15.9	12.6
3	20175.00	45.0 PK	74.0	-29.0	2.15 V	126	50.4	-5.4
4	20175.00	31.9 AV	54.0	-22.1	2.15 V	126	37.3	-5.4
5	#26900.00	46.5 PK	88.2	-41.7	1.84 V	137	47.5	-1.0
6	#26900.00	34.9 AV	68.2	-33.3	1.84 V	137	35.9	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 179 : 6845 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	41.5 PK	88.2	-46.7	1.40 H	341	28.3	13.2
2	#13690.00	30.2 AV	68.2	-38.0	1.40 H	341	17.0	13.2
3	20535.00	46.3 PK	74.0	-27.7	1.53 H	15	51.5	-5.2
4	20535.00	34.6 AV	54.0	-19.4	1.53 H	15	39.8	-5.2
5	#27380.00	49.6 PK	88.2	-38.6	2.18 H	41	51.0	-1.4
6	#27380.00	37.7 AV	68.2	-30.5	2.18 H	41	39.1	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	41.5 PK	88.2	-46.7	3.69 V	93	28.3	13.2
2	#13690.00	29.4 AV	68.2	-38.8	3.69 V	93	16.2	13.2
3	20535.00	44.6 PK	74.0	-29.4	2.19 V	125	49.8	-5.2
4	20535.00	31.4 AV	54.0	-22.6	2.19 V	125	36.6	-5.2
5	#27380.00	47.4 PK	88.2	-40.8	1.93 V	144	48.8	-1.4
6	#27380.00	35.8 AV	68.2	-32.4	1.93 V	144	37.2	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 7 : 5985 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	39.7 PK	74.0	-34.3	1.51 H	337	28.4	11.3
2	11970.00	28.6 AV	54.0	-25.4	1.51 H	337	17.3	11.3
3	17955.00	45.9 PK	74.0	-28.1	1.72 H	2	22.3	23.6
4	17955.00	34.7 AV	54.0	-19.3	1.72 H	2	11.1	23.6
5	23940.00	48.5 PK	74.0	-25.5	1.96 H	41	51.6	-3.1
6	23940.00	36.7 AV	54.0	-17.3	1.96 H	41	39.8	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	39.7 PK	74.0	-34.3	3.68 V	84	28.4	11.3
2	11970.00	27.8 AV	54.0	-26.2	3.68 V	84	16.5	11.3
3	17955.00	45.2 PK	74.0	-28.8	2.26 V	114	21.6	23.6
4	17955.00	31.9 AV	54.0	-22.1	2.26 V	114	8.3	23.6
5	23940.00	46.9 PK	74.0	-27.1	1.92 V	115	50.0	-3.1
6	23940.00	35.8 AV	54.0	-18.2	1.92 V	115	38.9	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE80)	Channel	CH 39 : 6145 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	40.5 PK	74.0	-33.5	1.50 H	314	29.6	10.9
2	12290.00	29.1 AV	54.0	-24.9	1.50 H	314	18.2	10.9
3	18435.00	45.7 PK	74.0	-28.3	1.68 H	16	52.3	-6.6
4	18435.00	34.4 AV	54.0	-19.6	1.68 H	16	41.0	-6.6
5	#24580.00	48.4 PK	88.2	-39.8	1.94 H	48	50.7	-2.3
6	#24580.00	36.5 AV	68.2	-31.7	1.94 H	48	38.8	-2.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	39.9 PK	74.0	-34.1	3.74 V	99	29.0	10.9
2	12290.00	27.7 AV	54.0	-26.3	3.74 V	99	16.8	10.9
3	18435.00	45.0 PK	74.0	-29.0	2.20 V	95	51.6	-6.6
4	18435.00	32.0 AV	54.0	-22.0	2.20 V	95	38.6	-6.6
5	#24580.00	46.8 PK	88.2	-41.4	1.86 V	126	49.1	-2.3
6	#24580.00	35.4 AV	68.2	-32.8	1.86 V	126	37.7	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 87 : 6385 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	40.3 PK	88.2	-47.9	1.58 H	323	29.5	10.8
2	#12770.00	29.0 AV	68.2	-39.2	1.58 H	323	18.2	10.8
3	19155.00	45.8 PK	74.0	-28.2	1.67 H	13	52.3	-6.5
4	19155.00	34.5 AV	54.0	-19.5	1.67 H	13	41.0	-6.5
5	#25540.00	48.9 PK	88.2	-39.3	1.94 H	33	50.3	-1.4
6	#25540.00	37.1 AV	68.2	-31.1	1.94 H	33	38.5	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	40.0 PK	88.2	-48.2	3.72 V	81	29.2	10.8
2	#12770.00	28.0 AV	68.2	-40.2	3.72 V	81	17.2	10.8
3	19155.00	45.3 PK	74.0	-28.7	2.21 V	105	51.8	-6.5
4	19155.00	31.7 AV	54.0	-22.3	2.21 V	105	38.2	-6.5
5	#25540.00	46.5 PK	88.2	-41.7	1.89 V	135	47.9	-1.4
6	#25540.00	35.1 AV	68.2	-33.1	1.89 V	135	36.5	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 135 : 6625 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	40.5 PK	74.0	-33.5	1.50 H	317	28.7	11.8
2	13250.00	29.0 AV	54.0	-25.0	1.50 H	317	17.2	11.8
3	19875.00	46.0 PK	74.0	-28.0	1.67 H	10	52.0	-6.0
4	19875.00	34.5 AV	54.0	-19.5	1.67 H	10	40.5	-6.0
5	#26500.00	49.2 PK	88.2	-39.0	1.99 H	43	49.6	-0.4
6	#26500.00	37.4 AV	68.2	-30.8	1.99 H	43	37.8	-0.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	40.3 PK	74.0	-33.7	3.62 V	98	28.5	11.8
2	13250.00	28.6 AV	54.0	-25.4	3.62 V	98	16.8	11.8
3	19875.00	43.8 PK	74.0	-30.2	2.15 V	111	49.8	-6.0
4	19875.00	30.8 AV	54.0	-23.2	2.15 V	111	36.8	-6.0
5	#26500.00	47.3 PK	88.2	-40.9	1.97 V	112	47.7	-0.4
6	#26500.00	35.8 AV	68.2	-32.4	1.97 V	112	36.2	-0.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 151 : 6705 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	40.4 PK	88.2	-47.8	1.54 H	333	28.1	12.3
2	#13410.00	28.9 AV	68.2	-39.3	1.54 H	333	16.6	12.3
3	20115.00	46.0 PK	74.0	-28.0	1.61 H	1	51.5	-5.5
4	20115.00	34.9 AV	54.0	-19.1	1.61 H	1	40.4	-5.5
5	#26820.00	48.6 PK	88.2	-39.6	2.00 H	21	49.4	-0.8
6	#26820.00	37.0 AV	68.2	-31.2	2.00 H	21	37.8	-0.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	40.0 PK	88.2	-48.2	3.66 V	104	27.7	12.3
2	#13410.00	27.9 AV	68.2	-40.3	3.66 V	104	15.6	12.3
3	20115.00	45.0 PK	74.0	-29.0	2.25 V	117	50.5	-5.5
4	20115.00	32.0 AV	54.0	-22.0	2.25 V	117	37.5	-5.5
5	#26820.00	47.1 PK	88.2	-41.1	1.90 V	108	47.9	-0.8
6	#26820.00	35.9 AV	68.2	-32.3	1.90 V	108	36.7	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 167 : 6785 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	40.3 PK	88.2	-47.9	1.53 H	329	27.3	13.0
2	#13570.00	29.0 AV	68.2	-39.2	1.53 H	329	16.0	13.0
3	20355.00	45.8 PK	74.0	-28.2	1.66 H	11	51.3	-5.5
4	20355.00	34.5 AV	54.0	-19.5	1.66 H	11	40.0	-5.5
5	#27140.00	48.7 PK	88.2	-39.5	1.97 H	33	50.1	-1.4
6	#27140.00	36.9 AV	68.2	-31.3	1.97 H	33	38.3	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	40.1 PK	88.2	-48.1	3.69 V	94	27.1	13.0
2	#13570.00	28.1 AV	68.2	-40.1	3.69 V	94	15.1	13.0
3	20355.00	44.9 PK	74.0	-29.1	2.21 V	103	50.4	-5.5
4	20355.00	31.6 AV	54.0	-22.4	2.21 V	103	37.1	-5.5
5	#27140.00	46.6 PK	88.2	-41.6	1.89 V	123	48.0	-1.4
6	#27140.00	35.5 AV	68.2	-32.7	1.89 V	123	36.9	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 15 : 6025 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	41.3 PK	74.0	-32.7	1.58 H	305	30.1	11.2
2	12050.00	29.5 AV	54.0	-24.5	1.58 H	305	18.3	11.2
3	18075.00	46.3 PK	74.0	-27.7	1.64 H	14	45.2	1.1
4	18075.00	34.8 AV	54.0	-19.2	1.64 H	14	33.7	1.1
5	#24100.00	48.6 PK	88.2	-39.6	2.02 H	101	51.5	-2.9
6	#24100.00	37.5 AV	68.2	-30.7	2.02 H	101	40.4	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	40.6 PK	74.0	-33.4	3.60 V	102	29.4	11.2
2	12050.00	28.9 AV	54.0	-25.1	3.60 V	102	17.7	11.2
3	18075.00	44.6 PK	74.0	-29.4	2.15 V	82	43.5	1.1
4	18075.00	31.6 AV	54.0	-22.4	2.15 V	82	30.5	1.1
5	#24100.00	48.3 PK	88.2	-39.9	1.89 V	144	51.2	-2.9
6	#24100.00	36.3 AV	68.2	-31.9	1.89 V	144	39.2	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 47 : 6185 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	41.0 PK	74.0	-33.0	1.63 H	317	30.6	10.4
2	12370.00	29.3 AV	54.0	-24.7	1.63 H	317	18.9	10.4
3	18555.00	46.0 PK	74.0	-28.0	1.62 H	17	52.6	-6.6
4	18555.00	34.6 AV	54.0	-19.4	1.62 H	17	41.2	-6.6
5	#24740.00	49.3 PK	88.2	-38.9	2.00 H	96	51.4	-2.1
6	#24740.00	38.0 AV	68.2	-30.2	2.00 H	96	40.1	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	40.6 PK	74.0	-33.4	3.58 V	117	30.2	10.4
2	12370.00	28.9 AV	54.0	-25.1	3.58 V	117	18.5	10.4
3	18555.00	44.0 PK	74.0	-30.0	2.11 V	86	50.6	-6.6
4	18555.00	31.1 AV	54.0	-22.9	2.11 V	86	37.7	-6.6
5	#24740.00	48.7 PK	88.2	-39.5	1.88 V	132	50.8	-2.1
6	#24740.00	36.5 AV	68.2	-31.7	1.88 V	132	38.6	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 79 : 6345 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	41.5 PK	74.0	-32.5	1.61 H	305	30.7	10.8
2	12690.00	29.6 AV	54.0	-24.4	1.61 H	305	18.8	10.8
3	19035.00	46.5 PK	74.0	-27.5	1.66 H	4	52.8	-6.3
4	19035.00	35.3 AV	54.0	-18.7	1.66 H	4	41.6	-6.3
5	#25380.00	48.2 PK	88.2	-40.0	2.02 H	104	49.8	-1.6
6	#25380.00	37.4 AV	68.2	-30.8	2.02 H	104	39.0	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	40.7 PK	74.0	-33.3	3.55 V	111	29.9	10.8
2	12690.00	29.3 AV	54.0	-24.7	3.55 V	111	18.5	10.8
3	19035.00	45.2 PK	74.0	-28.8	2.09 V	81	51.5	-6.3
4	19035.00	31.9 AV	54.0	-22.1	2.09 V	81	38.2	-6.3
5	#25380.00	48.3 PK	88.2	-39.9	1.85 V	156	49.9	-1.6
6	#25380.00	36.5 AV	68.2	-31.7	1.85 V	156	38.1	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 143 : 6665 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	41.9 PK	74.0	-32.1	1.60 H	306	29.9	12.0
2	13330.00	30.0 AV	54.0	-24.0	1.60 H	306	18.0	12.0
3	19995.00	46.2 PK	74.0	-27.8	1.68 H	14	52.1	-5.9
4	19995.00	34.9 AV	54.0	-19.1	1.68 H	14	40.8	-5.9
5	#26660.00	48.9 PK	88.2	-39.3	2.00 H	112	49.2	-0.3
6	#26660.00	38.0 AV	68.2	-30.2	2.00 H	112	38.3	-0.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	40.2 PK	74.0	-33.8	3.64 V	92	28.2	12.0
2	13330.00	28.7 AV	54.0	-25.3	3.64 V	92	16.7	12.0
3	19995.00	44.6 PK	74.0	-29.4	2.16 V	78	50.5	-5.9
4	19995.00	31.7 AV	54.0	-22.3	2.16 V	78	37.6	-5.9
5	#26660.00	48.2 PK	88.2	-40.0	1.85 V	154	48.5	-0.3
6	#26660.00	36.5 AV	68.2	-31.7	1.85 V	154	36.8	-0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

20MHz Preamble

RU26

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 2 : 5935 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	41.4 PK	74.0	-32.6	1.50 H	332	30.0	11.4
2	11870.00	29.7 AV	54.0	-24.3	1.50 H	332	18.3	11.4
3	17805.00	45.6 PK	74.0	-28.4	1.65 H	6	25.1	20.5
4	17805.00	34.1 AV	54.0	-19.9	1.65 H	6	13.6	20.5
5	23740.00	49.6 PK	74.0	-24.4	2.05 H	51	52.9	-3.3
6	23740.00	37.9 AV	54.0	-16.1	2.05 H	51	41.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	40.5 PK	74.0	-33.5	3.67 V	80	29.1	11.4
2	11870.00	28.8 AV	54.0	-25.2	3.67 V	80	17.4	11.4
3	17805.00	43.0 PK	74.0	-31.0	2.31 V	99	22.5	20.5
4	17805.00	32.5 AV	54.0	-21.5	2.31 V	99	12.0	20.5
5	23740.00	46.4 PK	74.0	-27.6	1.98 V	141	49.7	-3.3
6	23740.00	35.8 AV	54.0	-18.2	1.98 V	141	39.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 1 : 5955 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	42.6 PK	74.0	-31.4	1.51 H	342	31.1	11.5
2	11910.00	31.1 AV	54.0	-22.9	1.51 H	342	19.6	11.5
3	17865.00	45.0 PK	74.0	-29.0	1.57 H	1	23.4	21.6
4	17865.00	33.4 AV	54.0	-20.6	1.57 H	1	11.8	21.6
5	23820.00	49.1 PK	74.0	-24.9	2.10 H	88	52.4	-3.3
6	23820.00	37.6 AV	54.0	-16.4	2.10 H	88	40.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	40.7 PK	74.0	-33.3	3.69 V	118	29.2	11.5
2	11910.00	29.2 AV	54.0	-24.8	3.69 V	118	17.7	11.5
3	17865.00	43.6 PK	74.0	-30.4	2.32 V	109	22.0	21.6
4	17865.00	32.6 AV	54.0	-21.4	2.32 V	109	11.0	21.6
5	23820.00	48.0 PK	74.0	-26.0	1.66 V	199	51.3	-3.3
6	23820.00	35.5 AV	54.0	-18.5	1.66 V	199	38.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 45 : 6175 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	41.1 PK	74.0	-32.9	1.47 H	310	30.5	10.6
2	12350.00	29.2 AV	54.0	-24.8	1.47 H	310	18.6	10.6
3	18525.00	45.0 PK	74.0	-29.0	1.65 H	10	51.6	-6.6
4	18525.00	33.4 AV	54.0	-20.6	1.65 H	10	40.0	-6.6
5	#24700.00	50.5 PK	88.2	-37.7	2.03 H	45	52.6	-2.1
6	#24700.00	38.7 AV	68.2	-29.5	2.03 H	45	40.8	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	40.5 PK	74.0	-33.5	3.90 V	82	29.9	10.6
2	12350.00	29.3 AV	54.0	-24.7	3.90 V	82	18.7	10.6
3	18525.00	44.3 PK	74.0	-29.7	2.13 V	84	50.9	-6.6
4	18525.00	31.2 AV	54.0	-22.8	2.13 V	84	37.8	-6.6
5	#24700.00	45.1 PK	88.2	-43.1	1.83 V	153	47.2	-2.1
6	#24700.00	34.8 AV	68.2	-33.4	1.83 V	153	36.9	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 93 : 6415 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	41.4 PK	88.2	-46.8	1.49 H	322	30.6	10.8
2	#12830.00	29.3 AV	68.2	-38.9	1.49 H	322	18.5	10.8
3	19245.00	46.1 PK	74.0	-27.9	1.68 H	18	52.7	-6.6
4	19245.00	34.0 AV	54.0	-20.0	1.68 H	18	40.6	-6.6
5	#25660.00	50.2 PK	88.2	-38.0	2.02 H	30	51.5	-1.3
6	#25660.00	38.7 AV	68.2	-29.5	2.02 H	30	40.0	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	40.2 PK	88.2	-48.0	3.82 V	68	29.4	10.8
2	#12830.00	29.0 AV	68.2	-39.2	3.82 V	68	18.2	10.8
3	19245.00	44.3 PK	74.0	-29.7	2.00 V	94	50.9	-6.6
4	19245.00	31.4 AV	54.0	-22.6	2.00 V	94	38.0	-6.6
5	#25660.00	45.7 PK	88.2	-42.5	1.88 V	168	47.0	-1.3
6	#25660.00	35.1 AV	68.2	-33.1	1.88 V	168	36.4	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 117 : 6535 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	42.1 PK	88.2	-46.1	1.52 H	329	31.0	11.1
2	#13070.00	29.9 AV	68.2	-38.3	1.52 H	329	18.8	11.1
3	19605.00	46.2 PK	74.0	-27.8	1.61 H	21	52.4	-6.2
4	19605.00	34.7 AV	54.0	-19.3	1.61 H	21	40.9	-6.2
5	#26140.00	48.7 PK	88.2	-39.5	1.85 H	105	49.7	-1.0
6	#26140.00	37.5 AV	68.2	-30.7	1.85 H	105	38.5	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	40.5 PK	88.2	-47.7	3.79 V	73	29.4	11.1
2	#13070.00	28.8 AV	68.2	-39.4	3.79 V	73	17.7	11.1
3	19605.00	43.4 PK	74.0	-30.6	2.32 V	135	49.6	-6.2
4	19605.00	32.6 AV	54.0	-21.4	2.32 V	135	38.8	-6.2
5	#26140.00	46.2 PK	88.2	-42.0	1.73 V	166	47.2	-1.0
6	#26140.00	34.1 AV	68.2	-34.1	1.73 V	166	35.1	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 149 : 6695 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	42.7 PK	74.0	-31.3	1.52 H	300	30.4	12.3
2	13390.00	29.9 AV	54.0	-24.1	1.52 H	300	17.6	12.3
3	20085.00	46.0 PK	74.0	-28.0	1.62 H	38	51.7	-5.7
4	20085.00	34.4 AV	54.0	-19.6	1.62 H	38	40.1	-5.7
5	#26780.00	48.3 PK	88.2	-39.9	1.87 H	115	48.9	-0.6
6	#26780.00	36.8 AV	68.2	-31.4	1.87 H	115	37.4	-0.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	40.7 PK	74.0	-33.3	3.85 V	103	28.4	12.3
2	13390.00	29.1 AV	54.0	-24.9	3.85 V	103	16.8	12.3
3	20085.00	44.7 PK	74.0	-29.3	2.05 V	101	50.4	-5.7
4	20085.00	31.4 AV	54.0	-22.6	2.05 V	101	37.1	-5.7
5	#26780.00	45.9 PK	88.2	-42.3	1.91 V	139	46.5	-0.6
6	#26780.00	35.3 AV	68.2	-32.9	1.91 V	139	35.9	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 181 : 6855 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	42.3 PK	88.2	-45.9	1.56 H	305	29.2	13.1
2	#13710.00	30.7 AV	68.2	-37.5	1.56 H	305	17.6	13.1
3	20565.00	46.3 PK	74.0	-27.7	1.67 H	27	51.4	-5.1
4	20565.00	34.5 AV	54.0	-19.5	1.67 H	27	39.6	-5.1
5	#27420.00	49.2 PK	88.2	-39.0	1.95 H	73	50.7	-1.5
6	#27420.00	37.9 AV	68.2	-30.3	1.95 H	73	39.4	-1.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	40.7 PK	88.2	-47.5	3.91 V	74	27.6	13.1
2	#13710.00	29.0 AV	68.2	-39.2	3.91 V	74	15.9	13.1
3	20565.00	44.1 PK	74.0	-29.9	2.05 V	83	49.2	-5.1
4	20565.00	31.0 AV	54.0	-23.0	2.05 V	83	36.1	-5.1
5	#27420.00	46.1 PK	88.2	-42.1	1.90 V	176	47.6	-1.5
6	#27420.00	35.5 AV	68.2	-32.7	1.90 V	176	37.0	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RU52

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 2 : 5935 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	41.7 PK	74.0	-32.3	1.53 H	349	30.3	11.4
2	11870.00	30.2 AV	54.0	-23.8	1.53 H	349	18.8	11.4
3	17805.00	46.6 PK	74.0	-27.4	1.69 H	13	26.1	20.5
4	17805.00	34.5 AV	54.0	-19.5	1.69 H	13	14.0	20.5
5	23740.00	49.1 PK	74.0	-24.9	1.93 H	73	52.4	-3.3
6	23740.00	38.0 AV	54.0	-16.0	1.93 H	73	41.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	40.8 PK	74.0	-33.2	3.83 V	70	29.4	11.4
2	11870.00	28.8 AV	54.0	-25.2	3.83 V	70	17.4	11.4
3	17805.00	43.5 PK	74.0	-30.5	2.24 V	123	23.0	20.5
4	17805.00	32.4 AV	54.0	-21.6	2.24 V	123	11.9	20.5
5	23740.00	46.4 PK	74.0	-27.6	1.79 V	175	49.7	-3.3
6	23740.00	34.7 AV	54.0	-19.3	1.79 V	175	38.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 1 : 5955 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	42.2 PK	74.0	-31.8	1.47 H	316	30.7	11.5
2	11910.00	30.1 AV	54.0	-23.9	1.47 H	316	18.6	11.5
3	17865.00	46.4 PK	74.0	-27.6	1.71 H	59	24.8	21.6
4	17865.00	34.3 AV	54.0	-19.7	1.71 H	59	12.7	21.6
5	23820.00	50.7 PK	74.0	-23.3	1.98 H	57	54.0	-3.3
6	23820.00	39.1 AV	54.0	-14.9	1.98 H	57	42.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	41.5 PK	74.0	-32.5	3.95 V	59	30.0	11.5
2	11910.00	30.2 AV	54.0	-23.8	3.95 V	59	18.7	11.5
3	17865.00	44.5 PK	74.0	-29.5	2.19 V	98	22.9	21.6
4	17865.00	32.0 AV	54.0	-22.0	2.19 V	98	10.4	21.6
5	23820.00	46.2 PK	74.0	-27.8	1.91 V	168	49.5	-3.3
6	23820.00	35.1 AV	54.0	-18.9	1.91 V	168	38.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 45 : 6175 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	42.0 PK	74.0	-32.0	1.54 H	307	31.4	10.6
2	12350.00	29.3 AV	54.0	-24.7	1.54 H	307	18.7	10.6
3	18525.00	45.8 PK	74.0	-28.2	1.68 H	31	52.4	-6.6
4	18525.00	34.0 AV	54.0	-20.0	1.68 H	31	40.6	-6.6
5	#24700.00	49.0 PK	88.2	-39.2	1.90 H	94	51.1	-2.1
6	#24700.00	37.3 AV	68.2	-30.9	1.90 H	94	39.4	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	40.1 PK	74.0	-33.9	3.85 V	68	29.5	10.6
2	12350.00	28.4 AV	54.0	-25.6	3.85 V	68	17.8	10.6
3	18525.00	43.9 PK	74.0	-30.1	2.28 V	149	50.5	-6.6
4	18525.00	32.7 AV	54.0	-21.3	2.28 V	149	39.3	-6.6
5	#24700.00	46.4 PK	88.2	-41.8	1.79 V	163	48.5	-2.1
6	#24700.00	34.5 AV	68.2	-33.7	1.79 V	163	36.6	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 93 : 6415 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	42.0 PK	88.2	-46.2	1.52 H	350	31.2	10.8
2	#12830.00	30.3 AV	68.2	-37.9	1.52 H	350	19.5	10.8
3	19245.00	45.2 PK	74.0	-28.8	1.61 H	12	51.8	-6.6
4	19245.00	33.7 AV	54.0	-20.3	1.61 H	12	40.3	-6.6
5	#25660.00	49.3 PK	88.2	-38.9	1.88 H	82	50.6	-1.3
6	#25660.00	37.6 AV	68.2	-30.6	1.88 H	82	38.9	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	41.1 PK	88.2	-47.1	3.88 V	85	30.3	10.8
2	#12830.00	29.4 AV	68.2	-38.8	3.88 V	85	18.6	10.8
3	19245.00	44.5 PK	74.0	-29.5	2.15 V	82	51.1	-6.6
4	19245.00	31.3 AV	54.0	-22.7	2.15 V	82	37.9	-6.6
5	#25660.00	45.7 PK	88.2	-42.5	1.90 V	185	47.0	-1.3
6	#25660.00	34.9 AV	68.2	-33.3	1.90 V	185	36.2	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 117 : 6535 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	41.7 PK	88.2	-46.5	1.41 H	335	30.6	11.1
2	#13070.00	29.8 AV	68.2	-38.4	1.41 H	335	18.7	11.1
3	19605.00	48.3 PK	74.0	-25.7	1.74 H	38	54.5	-6.2
4	19605.00	36.0 AV	54.0	-18.0	1.74 H	38	42.2	-6.2
5	#26140.00	50.4 PK	88.2	-37.8	1.84 H	56	51.4	-1.0
6	#26140.00	38.6 AV	68.2	-29.6	1.84 H	56	39.6	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	41.1 PK	88.2	-47.1	3.83 V	78	30.0	11.1
2	#13070.00	29.3 AV	68.2	-38.9	3.83 V	78	18.2	11.1
3	19605.00	45.3 PK	74.0	-28.7	2.26 V	100	51.5	-6.2
4	19605.00	32.5 AV	54.0	-21.5	2.26 V	100	38.7	-6.2
5	#26140.00	46.6 PK	88.2	-41.6	1.86 V	154	47.6	-1.0
6	#26140.00	35.8 AV	68.2	-32.4	1.86 V	154	36.8	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 149 : 6695 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	42.4 PK	74.0	-31.6	1.58 H	305	30.1	12.3
2	13390.00	29.6 AV	54.0	-24.4	1.58 H	305	17.3	12.3
3	20085.00	46.1 PK	74.0	-27.9	1.65 H	70	51.8	-5.7
4	20085.00	33.7 AV	54.0	-20.3	1.65 H	70	39.4	-5.7
5	#26780.00	50.2 PK	88.2	-38.0	1.93 H	119	50.8	-0.6
6	#26780.00	38.2 AV	68.2	-30.0	1.93 H	119	38.8	-0.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	40.3 PK	74.0	-33.7	3.85 V	73	28.0	12.3
2	13390.00	28.7 AV	54.0	-25.3	3.85 V	73	16.4	12.3
3	20085.00	44.4 PK	74.0	-29.6	2.21 V	142	50.1	-5.7
4	20085.00	33.0 AV	54.0	-21.0	2.21 V	142	38.7	-5.7
5	#26780.00	46.7 PK	88.2	-41.5	1.76 V	134	47.3	-0.6
6	#26780.00	35.0 AV	68.2	-33.2	1.76 V	134	35.6	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 181 : 6855 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	42.4 PK	88.2	-45.8	1.53 H	348	29.3	13.1
2	#13710.00	30.6 AV	68.2	-37.6	1.53 H	348	17.5	13.1
3	20565.00	48.4 PK	74.0	-25.6	1.78 H	59	53.5	-5.1
4	20565.00	36.4 AV	54.0	-17.6	1.78 H	59	41.5	-5.1
5	#27420.00	49.7 PK	88.2	-38.5	1.97 H	63	51.2	-1.5
6	#27420.00	38.0 AV	68.2	-30.2	1.97 H	63	39.5	-1.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	41.4 PK	88.2	-46.8	3.82 V	89	28.3	13.1
2	#13710.00	29.8 AV	68.2	-38.4	3.82 V	89	16.7	13.1
3	20565.00	44.4 PK	74.0	-29.6	2.23 V	165	49.5	-5.1
4	20565.00	32.4 AV	54.0	-21.6	2.23 V	165	37.5	-5.1
5	#27420.00	46.5 PK	88.2	-41.7	1.84 V	156	48.0	-1.5
6	#27420.00	34.1 AV	68.2	-34.1	1.84 V	156	35.6	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RU106

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 2 : 5935 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	42.6 PK	74.0	-31.4	1.38 H	346	31.2	11.4
2	11870.00	30.8 AV	54.0	-23.2	1.38 H	346	19.4	11.4
3	17805.00	47.5 PK	74.0	-26.5	1.67 H	38	27.0	20.5
4	17805.00	35.3 AV	54.0	-18.7	1.67 H	38	14.8	20.5
5	23740.00	50.3 PK	74.0	-23.7	1.86 H	57	53.6	-3.3
6	23740.00	38.1 AV	54.0	-15.9	1.86 H	57	41.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	42.3 PK	74.0	-31.7	3.96 V	84	30.9	11.4
2	11870.00	30.6 AV	54.0	-23.4	3.96 V	84	19.2	11.4
3	17805.00	44.6 PK	74.0	-29.4	2.22 V	97	24.1	20.5
4	17805.00	32.0 AV	54.0	-22.0	2.22 V	97	11.5	20.5
5	23740.00	46.4 PK	74.0	-27.6	2.01 V	145	49.7	-3.3
6	23740.00	35.8 AV	54.0	-18.2	2.01 V	145	39.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 1 : 5955 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	40.6 PK	74.0	-33.4	1.43 H	313	29.1	11.5
2	11910.00	29.2 AV	54.0	-24.8	1.43 H	313	17.7	11.5
3	17865.00	45.1 PK	74.0	-28.9	1.74 H	8	23.5	21.6
4	17865.00	33.6 AV	54.0	-20.4	1.74 H	8	12.0	21.6
5	23820.00	49.2 PK	74.0	-24.8	1.95 H	42	52.5	-3.3
6	23820.00	37.6 AV	54.0	-16.4	1.95 H	42	40.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	42.9 PK	74.0	-31.1	3.95 V	71	31.4	11.5
2	11910.00	30.8 AV	54.0	-23.2	3.95 V	71	19.3	11.5
3	17865.00	45.4 PK	74.0	-28.6	2.21 V	107	23.8	21.6
4	17865.00	32.2 AV	54.0	-21.8	2.21 V	107	10.6	21.6
5	23820.00	46.8 PK	74.0	-27.2	1.99 V	136	50.1	-3.3
6	23820.00	35.7 AV	54.0	-18.3	1.99 V	136	39.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 45 : 6175 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	42.6 PK	74.0	-31.4	1.42 H	345	32.0	10.6
2	12350.00	30.6 AV	54.0	-23.4	1.42 H	345	20.0	10.6
3	18525.00	47.6 PK	74.0	-26.4	1.72 H	31	54.2	-6.6
4	18525.00	35.6 AV	54.0	-18.4	1.72 H	31	42.2	-6.6
5	#24700.00	49.2 PK	88.2	-39.0	1.89 H	74	51.3	-2.1
6	#24700.00	37.5 AV	68.2	-30.7	1.89 H	74	39.6	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	40.1 PK	74.0	-33.9	3.93 V	73	29.5	10.6
2	12350.00	29.1 AV	54.0	-24.9	3.93 V	73	18.5	10.6
3	18525.00	44.9 PK	74.0	-29.1	2.34 V	78	51.5	-6.6
4	18525.00	32.1 AV	54.0	-21.9	2.34 V	78	38.7	-6.6
5	#24700.00	46.0 PK	88.2	-42.2	1.95 V	161	48.1	-2.1
6	#24700.00	35.4 AV	68.2	-32.8	1.95 V	161	37.5	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 93 : 6415 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	41.5 PK	88.2	-46.7	1.54 H	323	30.7	10.8
2	#12830.00	30.0 AV	68.2	-38.2	1.54 H	323	19.2	10.8
3	19245.00	48.1 PK	74.0	-25.9	1.59 H	8	54.7	-6.6
4	19245.00	35.9 AV	54.0	-18.1	1.59 H	8	42.5	-6.6
5	#25660.00	48.5 PK	88.2	-39.7	1.92 H	95	49.8	-1.3
6	#25660.00	37.9 AV	68.2	-30.3	1.92 H	95	39.2	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	40.2 PK	88.2	-48.0	3.86 V	85	29.4	10.8
2	#12830.00	29.0 AV	68.2	-39.2	3.86 V	85	18.2	10.8
3	19245.00	44.0 PK	74.0	-30.0	2.31 V	80	50.6	-6.6
4	19245.00	31.5 AV	54.0	-22.5	2.31 V	80	38.1	-6.6
5	#25660.00	45.4 PK	88.2	-42.8	1.84 V	163	46.7	-1.3
6	#25660.00	34.4 AV	68.2	-33.8	1.84 V	163	35.7	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 117 : 6535 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	41.5 PK	88.2	-46.7	1.52 H	358	30.4	11.1
2	#13070.00	30.5 AV	68.2	-37.7	1.52 H	358	19.4	11.1
3	19605.00	46.1 PK	74.0	-27.9	1.53 H	23	52.3	-6.2
4	19605.00	34.4 AV	54.0	-19.6	1.53 H	23	40.6	-6.2
5	#26140.00	49.7 PK	88.2	-38.5	2.07 H	72	50.7	-1.0
6	#26140.00	38.6 AV	68.2	-29.6	2.07 H	72	39.6	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	40.7 PK	88.2	-47.5	3.89 V	61	29.6	11.1
2	#13070.00	29.2 AV	68.2	-39.0	3.89 V	61	18.1	11.1
3	19605.00	44.8 PK	74.0	-29.2	2.28 V	52	51.0	-6.2
4	19605.00	32.2 AV	54.0	-21.8	2.28 V	52	38.4	-6.2
5	#26140.00	45.6 PK	88.2	-42.6	1.84 V	156	46.6	-1.0
6	#26140.00	34.9 AV	68.2	-33.3	1.84 V	156	35.9	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 149 : 6695 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	40.7 PK	74.0	-33.3	1.51 H	326	28.4	12.3
2	13390.00	29.5 AV	54.0	-24.5	1.51 H	326	17.2	12.3
3	20085.00	48.6 PK	74.0	-25.4	1.62 H	15	54.3	-5.7
4	20085.00	36.3 AV	54.0	-17.7	1.62 H	15	42.0	-5.7
5	#26780.00	48.5 PK	88.2	-39.7	1.95 H	99	49.1	-0.6
6	#26780.00	37.2 AV	68.2	-31.0	1.95 H	99	37.8	-0.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	40.3 PK	74.0	-33.7	3.92 V	57	28.0	12.3
2	13390.00	29.0 AV	54.0	-25.0	3.92 V	57	16.7	12.3
3	20085.00	43.5 PK	74.0	-30.5	2.32 V	98	49.2	-5.7
4	20085.00	31.0 AV	54.0	-23.0	2.32 V	98	36.7	-5.7
5	#26780.00	45.9 PK	88.2	-42.3	1.89 V	165	46.5	-0.6
6	#26780.00	35.3 AV	68.2	-32.9	1.89 V	165	35.9	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 181 : 6855 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	40.1 PK	88.2	-48.1	1.46 H	309	27.0	13.1
2	#13710.00	28.5 AV	68.2	-39.7	1.46 H	309	15.4	13.1
3	20565.00	45.1 PK	74.0	-28.9	1.68 H	6	50.2	-5.1
4	20565.00	33.6 AV	54.0	-20.4	1.68 H	6	38.7	-5.1
5	#27420.00	48.9 PK	88.2	-39.3	1.95 H	34	50.4	-1.5
6	#27420.00	37.2 AV	68.2	-31.0	1.95 H	34	38.7	-1.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	40.0 PK	88.2	-48.2	3.82 V	47	26.9	13.1
2	#13710.00	29.1 AV	68.2	-39.1	3.82 V	47	16.0	13.1
3	20565.00	44.4 PK	74.0	-29.6	2.34 V	50	49.5	-5.1
4	20565.00	32.2 AV	54.0	-21.8	2.34 V	50	37.3	-5.1
5	#27420.00	45.1 PK	88.2	-43.1	1.91 V	147	46.6	-1.5
6	#27420.00	34.1 AV	68.2	-34.1	1.91 V	147	35.6	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RU242

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 2 : 5935 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	41.1 PK	74.0	-32.9	1.58 H	308	29.7	11.4
2	11870.00	29.3 AV	54.0	-24.7	1.58 H	308	17.9	11.4
3	17805.00	48.3 PK	74.0	-25.7	1.60 H	13	27.8	20.5
4	17805.00	36.2 AV	54.0	-17.8	1.60 H	13	15.7	20.5
5	23740.00	48.2 PK	74.0	-25.8	1.98 H	81	51.5	-3.3
6	23740.00	37.8 AV	54.0	-16.2	1.98 H	81	41.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	39.8 PK	74.0	-34.2	3.81 V	49	28.4	11.4
2	11870.00	28.6 AV	54.0	-25.4	3.81 V	49	17.2	11.4
3	17805.00	44.4 PK	74.0	-29.6	2.37 V	61	23.9	20.5
4	17805.00	31.9 AV	54.0	-22.1	2.37 V	61	11.4	20.5
5	23740.00	44.9 PK	74.0	-29.1	1.85 V	151	48.2	-3.3
6	23740.00	34.3 AV	54.0	-19.7	1.85 V	151	37.6	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 1 : 5955 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	40.8 PK	74.0	-33.2	1.59 H	303	29.3	11.5
2	11910.00	29.2 AV	54.0	-24.8	1.59 H	303	17.7	11.5
3	17865.00	47.6 PK	74.0	-26.4	1.63 H	10	26.0	21.6
4	17865.00	35.5 AV	54.0	-18.5	1.63 H	10	13.9	21.6
5	23820.00	48.2 PK	74.0	-25.8	2.02 H	83	51.5	-3.3
6	23820.00	37.7 AV	54.0	-16.3	2.02 H	83	41.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	43.1 PK	74.0	-30.9	4.00 V	99	31.6	11.5
2	11910.00	31.2 AV	54.0	-22.8	4.00 V	99	19.7	11.5
3	17865.00	44.2 PK	74.0	-29.8	2.16 V	145	22.6	21.6
4	17865.00	32.0 AV	54.0	-22.0	2.16 V	145	10.4	21.6
5	23820.00	47.6 PK	74.0	-26.4	2.11 V	142	50.9	-3.3
6	23820.00	35.8 AV	54.0	-18.2	2.11 V	142	39.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 45 : 6175 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	41.5 PK	74.0	-32.5	1.50 H	305	30.9	10.6
2	12350.00	29.8 AV	54.0	-24.2	1.50 H	305	19.2	10.6
3	18525.00	46.1 PK	74.0	-27.9	1.55 H	19	52.7	-6.6
4	18525.00	34.1 AV	54.0	-19.9	1.55 H	19	40.7	-6.6
5	#24700.00	49.6 PK	88.2	-38.6	1.99 H	36	51.7	-2.1
6	#24700.00	37.9 AV	68.2	-30.3	1.99 H	36	40.0	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	39.5 PK	74.0	-34.5	3.88 V	83	28.9	10.6
2	12350.00	28.8 AV	54.0	-25.2	3.88 V	83	18.2	10.6
3	18525.00	43.7 PK	74.0	-30.3	2.36 V	65	50.3	-6.6
4	18525.00	31.7 AV	54.0	-22.3	2.36 V	65	38.3	-6.6
5	#24700.00	46.5 PK	88.2	-41.7	1.95 V	145	48.6	-2.1
6	#24700.00	36.0 AV	68.2	-32.2	1.95 V	145	38.1	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 93 : 6415 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	40.4 PK	88.2	-47.8	1.49 H	326	29.6	10.8
2	#12830.00	28.6 AV	68.2	-39.6	1.49 H	326	17.8	10.8
3	19245.00	44.7 PK	74.0	-29.3	1.58 H	16	51.3	-6.6
4	19245.00	33.1 AV	54.0	-20.9	1.58 H	16	39.7	-6.6
5	#25660.00	48.9 PK	88.2	-39.3	2.03 H	58	50.2	-1.3
6	#25660.00	37.1 AV	68.2	-31.1	2.03 H	58	38.4	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	40.3 PK	88.2	-47.9	3.88 V	50	29.5	10.8
2	#12830.00	28.8 AV	68.2	-39.4	3.88 V	50	18.0	10.8
3	19245.00	44.3 PK	74.0	-29.7	2.43 V	64	50.9	-6.6
4	19245.00	31.8 AV	54.0	-22.2	2.43 V	64	38.4	-6.6
5	#25660.00	44.8 PK	88.2	-43.4	1.88 V	143	46.1	-1.3
6	#25660.00	34.4 AV	68.2	-33.8	1.88 V	143	35.7	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 117 : 6535 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	41.8 PK	88.2	-46.4	1.59 H	314	30.7	11.1
2	#13070.00	29.8 AV	68.2	-38.4	1.59 H	314	18.7	11.1
3	19605.00	49.1 PK	74.0	-24.9	1.53 H	24	55.3	-6.2
4	19605.00	37.2 AV	54.0	-16.8	1.53 H	24	43.4	-6.2
5	#26140.00	48.7 PK	88.2	-39.5	1.84 H	100	49.7	-1.0
6	#26140.00	38.4 AV	68.2	-29.8	1.84 H	100	39.4	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	40.8 PK	88.2	-47.4	3.88 V	104	29.7	11.1
2	#13070.00	29.7 AV	68.2	-38.5	3.88 V	104	18.6	11.1
3	19605.00	42.8 PK	74.0	-31.2	2.29 V	127	49.0	-6.2
4	19605.00	30.7 AV	54.0	-23.3	2.29 V	127	36.9	-6.2
5	#26140.00	45.6 PK	88.2	-42.6	1.94 V	169	46.6	-1.0
6	#26140.00	35.1 AV	68.2	-33.1	1.94 V	169	36.1	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 149 : 6695 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	40.2 PK	74.0	-33.8	1.63 H	318	27.9	12.3
2	13390.00	28.9 AV	54.0	-25.1	1.63 H	318	16.6	12.3
3	20085.00	48.2 PK	74.0	-25.8	1.68 H	20	53.9	-5.7
4	20085.00	35.6 AV	54.0	-18.4	1.68 H	20	41.3	-5.7
5	#26780.00	49.7 PK	88.2	-38.5	2.01 H	111	50.3	-0.6
6	#26780.00	38.7 AV	68.2	-29.5	2.01 H	111	39.3	-0.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	39.5 PK	74.0	-34.5	3.79 V	58	27.2	12.3
2	13390.00	28.4 AV	54.0	-25.6	3.79 V	58	16.1	12.3
3	20085.00	44.9 PK	74.0	-29.1	2.21 V	48	50.6	-5.7
4	20085.00	32.2 AV	54.0	-21.8	2.21 V	48	37.9	-5.7
5	#26780.00	46.3 PK	88.2	-41.9	1.82 V	143	46.9	-0.6
6	#26780.00	35.2 AV	68.2	-33.0	1.82 V	143	35.8	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 181 : 6855 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	40.5 PK	88.2	-47.7	1.50 H	290	27.4	13.1
2	#13710.00	28.9 AV	68.2	-39.3	1.50 H	290	15.8	13.1
3	20565.00	47.5 PK	74.0	-26.5	1.60 H	37	52.6	-5.1
4	20565.00	35.1 AV	54.0	-18.9	1.60 H	37	40.2	-5.1
5	#27420.00	50.2 PK	88.2	-38.0	2.05 H	92	51.7	-1.5
6	#27420.00	39.1 AV	68.2	-29.1	2.05 H	92	40.6	-1.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	43.6 PK	88.2	-44.6	3.93 V	82	30.5	13.1
2	#13710.00	31.2 AV	68.2	-37.0	3.93 V	82	18.1	13.1
3	20565.00	44.5 PK	74.0	-29.5	2.17 V	150	49.6	-5.1
4	20565.00	31.8 AV	54.0	-22.2	2.17 V	150	36.9	-5.1
5	#27420.00	46.4 PK	88.2	-41.8	1.97 V	126	47.9	-1.5
6	#27420.00	35.1 AV	68.2	-33.1	1.97 V	126	36.6	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

40MHz Preamble

RU26

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 3 : 5965 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	42.4 PK	74.0	-31.6	1.41 H	340	30.9	11.5
2	11930.00	30.6 AV	54.0	-23.4	1.41 H	340	19.1	11.5
3	17895.00	45.2 PK	74.0	-28.8	1.60 H	2	23.1	22.1
4	17895.00	33.3 AV	54.0	-20.7	1.60 H	2	11.2	22.1
5	23860.00	48.7 PK	74.0	-25.3	1.94 H	56	52.0	-3.3
6	23860.00	37.5 AV	54.0	-16.5	1.94 H	56	40.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	40.9 PK	74.0	-33.1	3.73 V	92	29.4	11.5
2	11930.00	29.4 AV	54.0	-24.6	3.73 V	92	17.9	11.5
3	17895.00	45.7 PK	74.0	-28.3	2.11 V	111	23.6	22.1
4	17895.00	32.5 AV	54.0	-21.5	2.11 V	111	10.4	22.1
5	23860.00	46.1 PK	74.0	-27.9	2.01 V	134	49.4	-3.3
6	23860.00	35.4 AV	54.0	-18.6	2.01 V	134	38.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 43 : 6165 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	41.2 PK	74.0	-32.8	1.61 H	320	30.5	10.7
2	12330.00	29.4 AV	54.0	-24.6	1.61 H	320	18.7	10.7
3	18495.00	45.9 PK	74.0	-28.1	1.61 H	26	52.5	-6.6
4	18495.00	34.4 AV	54.0	-19.6	1.61 H	26	41.0	-6.6
5	#24660.00	49.4 PK	88.2	-38.8	1.97 H	59	51.5	-2.1
6	#24660.00	37.5 AV	68.2	-30.7	1.97 H	59	39.6	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	38.9 PK	74.0	-35.1	3.64 V	97	28.2	10.7
2	12330.00	27.6 AV	54.0	-26.4	3.64 V	97	16.9	10.7
3	18495.00	42.7 PK	74.0	-31.3	2.27 V	102	49.3	-6.6
4	18495.00	32.4 AV	54.0	-21.6	2.27 V	102	39.0	-6.6
5	#24660.00	47.1 PK	88.2	-41.1	1.87 V	162	49.2	-2.1
6	#24660.00	36.5 AV	68.2	-31.7	1.87 V	162	38.6	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 91 : 6405 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	41.8 PK	88.2	-46.4	1.32 H	327	31.0	10.8
2	#12810.00	30.3 AV	68.2	-37.9	1.32 H	327	19.5	10.8
3	19215.00	46.0 PK	74.0	-28.0	1.57 H	11	52.5	-6.5
4	19215.00	34.4 AV	54.0	-19.6	1.57 H	11	40.9	-6.5
5	#25620.00	48.4 PK	88.2	-39.8	2.11 H	43	49.7	-1.3
6	#25620.00	37.2 AV	68.2	-31.0	2.11 H	43	38.5	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	39.9 PK	88.2	-48.3	3.72 V	59	29.1	10.8
2	#12810.00	29.2 AV	68.2	-39.0	3.72 V	59	18.4	10.8
3	19215.00	43.8 PK	74.0	-30.2	2.11 V	129	50.3	-6.5
4	19215.00	31.1 AV	54.0	-22.9	2.11 V	129	37.6	-6.5
5	#25620.00	46.4 PK	88.2	-41.8	1.98 V	134	47.7	-1.3
6	#25620.00	36.1 AV	68.2	-32.1	1.98 V	134	37.4	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 123 : 6565 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	41.6 PK	88.2	-46.6	1.48 H	300	30.2	11.4
2	#13130.00	29.8 AV	68.2	-38.4	1.48 H	300	18.4	11.4
3	19695.00	44.4 PK	74.0	-29.6	1.62 H	0	50.6	-6.2
4	19695.00	32.5 AV	54.0	-21.5	1.62 H	0	38.7	-6.2
5	#26260.00	48.7 PK	88.2	-39.5	2.05 H	75	49.7	-1.0
6	#26260.00	36.6 AV	68.2	-31.6	2.05 H	75	37.6	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	40.8 PK	88.2	-47.4	3.79 V	92	29.4	11.4
2	#13130.00	29.3 AV	68.2	-38.9	3.79 V	92	17.9	11.4
3	19695.00	45.0 PK	74.0	-29.0	2.24 V	103	51.2	-6.2
4	19695.00	31.8 AV	54.0	-22.2	2.24 V	103	38.0	-6.2
5	#26260.00	46.6 PK	88.2	-41.6	1.87 V	140	47.6	-1.0
6	#26260.00	36.2 AV	68.2	-32.0	1.87 V	140	37.2	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 155 : 6725 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	42.4 PK	88.2	-45.8	1.60 H	304	29.8	12.6
2	#13450.00	30.1 AV	68.2	-38.1	1.60 H	304	17.5	12.6
3	20175.00	45.0 PK	74.0	-29.0	1.62 H	15	50.4	-5.4
4	20175.00	33.3 AV	54.0	-20.7	1.62 H	15	38.7	-5.4
5	#26900.00	48.9 PK	88.2	-39.3	1.99 H	74	49.9	-1.0
6	#26900.00	37.4 AV	68.2	-30.8	1.99 H	74	38.4	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	40.8 PK	88.2	-47.4	3.68 V	86	28.2	12.6
2	#13450.00	29.3 AV	68.2	-38.9	3.68 V	86	16.7	12.6
3	20175.00	43.1 PK	74.0	-30.9	2.33 V	132	48.5	-5.4
4	20175.00	32.3 AV	54.0	-21.7	2.33 V	132	37.7	-5.4
5	#26900.00	47.2 PK	88.2	-41.0	1.85 V	153	48.2	-1.0
6	#26900.00	36.6 AV	68.2	-31.6	1.85 V	153	37.6	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 179 : 6845 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	42.3 PK	88.2	-45.9	1.43 H	290	29.1	13.2
2	#13690.00	30.8 AV	68.2	-37.4	1.43 H	290	17.6	13.2
3	20535.00	45.7 PK	74.0	-28.3	1.56 H	28	50.9	-5.2
4	20535.00	33.7 AV	54.0	-20.3	1.56 H	28	38.9	-5.2
5	#27380.00	49.0 PK	88.2	-39.2	1.87 H	75	50.4	-1.4
6	#27380.00	36.9 AV	68.2	-31.3	1.87 H	75	38.3	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	39.9 PK	88.2	-48.3	3.65 V	103	26.7	13.2
2	#13690.00	28.2 AV	68.2	-40.0	3.65 V	103	15.0	13.2
3	20535.00	43.6 PK	74.0	-30.4	2.19 V	101	48.8	-5.2
4	20535.00	32.2 AV	54.0	-21.8	2.19 V	101	37.4	-5.2
5	#27380.00	46.7 PK	88.2	-41.5	1.88 V	146	48.1	-1.4
6	#27380.00	35.9 AV	68.2	-32.3	1.88 V	146	37.3	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RU52

RF Mode	TX 40MHz Preamble 802.11ax (RU52)	Channel	CH 3 : 5965 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	41.6 PK	74.0	-32.4	1.61 H	302	30.1	11.5
2	11930.00	29.5 AV	54.0	-24.5	1.61 H	302	18.0	11.5
3	17895.00	45.3 PK	74.0	-28.7	1.58 H	22	23.2	22.1
4	17895.00	33.3 AV	54.0	-20.7	1.58 H	22	11.2	22.1
5	23860.00	47.7 PK	74.0	-26.3	2.02 H	101	51.0	-3.3
6	23860.00	36.2 AV	54.0	-17.8	2.02 H	101	39.5	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	40.7 PK	74.0	-33.3	3.70 V	79	29.2	11.5
2	11930.00	29.5 AV	54.0	-24.5	3.70 V	79	18.0	11.5
3	17895.00	45.1 PK	74.0	-28.9	2.13 V	95	23.0	22.1
4	17895.00	31.9 AV	54.0	-22.1	2.13 V	95	9.8	22.1
5	23860.00	46.7 PK	74.0	-27.3	1.98 V	135	50.0	-3.3
6	23860.00	36.4 AV	54.0	-17.6	1.98 V	135	39.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU52)	Channel	CH 43 : 6165 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	41.6 PK	74.0	-32.4	1.44 H	302	30.9	10.7
2	12330.00	30.5 AV	54.0	-23.5	1.44 H	302	19.8	10.7
3	18495.00	45.6 PK	74.0	-28.4	1.50 H	18	52.2	-6.6
4	18495.00	33.9 AV	54.0	-20.1	1.50 H	18	40.5	-6.6
5	#24660.00	47.5 PK	88.2	-40.7	1.80 H	83	49.6	-2.1
6	#24660.00	36.0 AV	68.2	-32.2	1.80 H	83	38.1	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	40.4 PK	74.0	-33.6	3.69 V	76	29.7	10.7
2	12330.00	28.5 AV	54.0	-25.5	3.69 V	76	17.8	10.7
3	18495.00	44.4 PK	74.0	-29.6	2.33 V	121	51.0	-6.6
4	18495.00	33.0 AV	54.0	-21.0	2.33 V	121	39.6	-6.6
5	#24660.00	48.1 PK	88.2	-40.1	1.85 V	177	50.2	-2.1
6	#24660.00	36.3 AV	68.2	-31.9	1.85 V	177	38.4	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU52)	Channel	CH 91 : 6405 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	42.3 PK	88.2	-45.9	1.51 H	350	31.5	10.8
2	#12810.00	30.0 AV	68.2	-38.2	1.51 H	350	19.2	10.8
3	19215.00	44.5 PK	74.0	-29.5	1.63 H	25	51.0	-6.5
4	19215.00	33.2 AV	54.0	-20.8	1.63 H	25	39.7	-6.5
5	#25620.00	49.6 PK	88.2	-38.6	1.93 H	63	50.9	-1.3
6	#25620.00	37.5 AV	68.2	-30.7	1.93 H	63	38.8	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	40.7 PK	88.2	-47.5	3.75 V	79	29.9	10.8
2	#12810.00	28.9 AV	68.2	-39.3	3.75 V	79	18.1	10.8
3	19215.00	43.6 PK	74.0	-30.4	2.34 V	121	50.1	-6.5
4	19215.00	32.3 AV	54.0	-21.7	2.34 V	121	38.8	-6.5
5	#25620.00	48.4 PK	88.2	-39.8	1.82 V	170	49.7	-1.3
6	#25620.00	36.2 AV	68.2	-32.0	1.82 V	170	37.5	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU52)	Channel	CH 123 : 6565 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	41.7 PK	88.2	-46.5	1.61 H	325	30.3	11.4
2	#13130.00	29.5 AV	68.2	-38.7	1.61 H	325	18.1	11.4
3	19695.00	44.7 PK	74.0	-29.3	1.61 H	8	50.9	-6.2
4	19695.00	33.5 AV	54.0	-20.5	1.61 H	8	39.7	-6.2
5	#26260.00	49.6 PK	88.2	-38.6	1.92 H	51	50.6	-1.0
6	#26260.00	38.1 AV	68.2	-30.1	1.92 H	51	39.1	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	40.9 PK	88.2	-47.3	3.61 V	92	29.5	11.4
2	#13130.00	29.2 AV	68.2	-39.0	3.61 V	92	17.8	11.4
3	19695.00	43.3 PK	74.0	-30.7	2.19 V	106	49.5	-6.2
4	19695.00	32.0 AV	54.0	-22.0	2.19 V	106	38.2	-6.2
5	#26260.00	47.6 PK	88.2	-40.6	1.76 V	163	48.6	-1.0
6	#26260.00	35.6 AV	68.2	-32.6	1.76 V	163	36.6	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU52)	Channel	CH 155 : 6725 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	41.8 PK	88.2	-46.4	1.65 H	297	29.2	12.6
2	#13450.00	29.8 AV	68.2	-38.4	1.65 H	297	17.2	12.6
3	20175.00	46.4 PK	74.0	-27.6	1.63 H	22	51.8	-5.4
4	20175.00	34.5 AV	54.0	-19.5	1.63 H	22	39.9	-5.4
5	#26900.00	49.0 PK	88.2	-39.2	1.99 H	87	50.0	-1.0
6	#26900.00	37.2 AV	68.2	-31.0	1.99 H	87	38.2	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	40.4 PK	88.2	-47.8	3.64 V	80	27.8	12.6
2	#13450.00	28.5 AV	68.2	-39.7	3.64 V	80	15.9	12.6
3	20175.00	42.9 PK	74.0	-31.1	2.23 V	120	48.3	-5.4
4	20175.00	31.6 AV	54.0	-22.4	2.23 V	120	37.0	-5.4
5	#26900.00	47.1 PK	88.2	-41.1	1.76 V	161	48.1	-1.0
6	#26900.00	34.8 AV	68.2	-33.4	1.76 V	161	35.8	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU52)	Channel	CH 179 : 6845 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	43.0 PK	88.2	-45.2	1.62 H	336	29.8	13.2
2	#13690.00	30.7 AV	68.2	-37.5	1.62 H	336	17.5	13.2
3	20535.00	45.5 PK	74.0	-28.5	1.66 H	7	50.7	-5.2
4	20535.00	33.9 AV	54.0	-20.1	1.66 H	7	39.1	-5.2
5	#27380.00	48.2 PK	88.2	-40.0	1.95 H	80	49.6	-1.4
6	#27380.00	36.8 AV	68.2	-31.4	1.95 H	80	38.2	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	39.9 PK	88.2	-48.3	3.77 V	78	26.7	13.2
2	#13690.00	28.2 AV	68.2	-40.0	3.77 V	78	15.0	13.2
3	20535.00	43.1 PK	74.0	-30.9	2.19 V	132	48.3	-5.2
4	20535.00	32.0 AV	54.0	-22.0	2.19 V	132	37.2	-5.2
5	#27380.00	47.8 PK	88.2	-40.4	1.78 V	202	49.2	-1.4
6	#27380.00	35.4 AV	68.2	-32.8	1.78 V	202	36.8	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RU106

RF Mode	TX 40MHz Preamble 802.11ax (RU106)	Channel	CH 3 : 5965 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	42.9 PK	74.0	-31.1	1.58 H	323	31.4	11.5
2	11930.00	30.2 AV	54.0	-23.8	1.58 H	323	18.7	11.5
3	17895.00	45.4 PK	74.0	-28.6	1.62 H	32	23.3	22.1
4	17895.00	34.0 AV	54.0	-20.0	1.62 H	32	11.9	22.1
5	23860.00	49.3 PK	74.0	-24.7	1.91 H	93	52.6	-3.3
6	23860.00	37.5 AV	54.0	-16.5	1.91 H	93	40.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	40.0 PK	74.0	-34.0	3.69 V	87	28.5	11.5
2	11930.00	28.6 AV	54.0	-25.4	3.69 V	87	17.1	11.5
3	17895.00	44.0 PK	74.0	-30.0	2.32 V	97	21.9	22.1
4	17895.00	33.0 AV	54.0	-21.0	2.32 V	97	10.9	22.1
5	23860.00	46.7 PK	74.0	-27.3	1.78 V	184	50.0	-3.3
6	23860.00	34.5 AV	54.0	-19.5	1.78 V	184	37.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU106)	Channel	CH 43 : 6165 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	42.2 PK	74.0	-31.8	1.55 H	284	31.5	10.7
2	12330.00	29.8 AV	54.0	-24.2	1.55 H	284	19.1	10.7
3	18495.00	44.5 PK	74.0	-29.5	1.60 H	10	51.1	-6.6
4	18495.00	32.8 AV	54.0	-21.2	1.60 H	10	39.4	-6.6
5	#24660.00	47.8 PK	88.2	-40.4	2.00 H	110	49.9	-2.1
6	#24660.00	36.4 AV	68.2	-31.8	2.00 H	110	38.5	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	40.1 PK	74.0	-33.9	3.66 V	76	29.4	10.7
2	12330.00	28.2 AV	54.0	-25.8	3.66 V	76	17.5	10.7
3	18495.00	43.3 PK	74.0	-30.7	2.24 V	112	49.9	-6.6
4	18495.00	32.1 AV	54.0	-21.9	2.24 V	112	38.7	-6.6
5	#24660.00	47.4 PK	88.2	-40.8	1.76 V	180	49.5	-2.1
6	#24660.00	35.5 AV	68.2	-32.7	1.76 V	180	37.6	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU106)	Channel	CH 91 : 6405 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	42.8 PK	88.2	-45.4	1.50 H	327	32.0	10.8
2	#12810.00	30.5 AV	68.2	-37.7	1.50 H	327	19.7	10.8
3	19215.00	45.7 PK	74.0	-28.3	1.59 H	12	52.2	-6.5
4	19215.00	34.2 AV	54.0	-19.8	1.59 H	12	40.7	-6.5
5	#25620.00	48.9 PK	88.2	-39.3	1.90 H	87	50.2	-1.3
6	#25620.00	37.3 AV	68.2	-30.9	1.90 H	87	38.6	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	40.6 PK	88.2	-47.6	3.77 V	80	29.8	10.8
2	#12810.00	29.0 AV	68.2	-39.2	3.77 V	80	18.2	10.8
3	19215.00	43.5 PK	74.0	-30.5	2.32 V	134	50.0	-6.5
4	19215.00	32.1 AV	54.0	-21.9	2.32 V	134	38.6	-6.5
5	#25620.00	47.0 PK	88.2	-41.2	1.74 V	173	48.3	-1.3
6	#25620.00	34.8 AV	68.2	-33.4	1.74 V	173	36.1	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU106)	Channel	CH 123 : 6565 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	41.4 PK	88.2	-46.8	1.65 H	292	30.0	11.4
2	#13130.00	29.6 AV	68.2	-38.6	1.65 H	292	18.2	11.4
3	19695.00	46.8 PK	74.0	-27.2	1.79 H	9	53.0	-6.2
4	19695.00	35.0 AV	54.0	-19.0	1.79 H	9	41.2	-6.2
5	#26260.00	49.1 PK	88.2	-39.1	2.12 H	55	50.1	-1.0
6	#26260.00	37.6 AV	68.2	-30.6	2.12 H	55	38.6	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	40.6 PK	88.2	-47.6	3.75 V	87	29.2	11.4
2	#13130.00	28.5 AV	68.2	-39.7	3.75 V	87	17.1	11.4
3	19695.00	44.0 PK	74.0	-30.0	2.24 V	113	50.2	-6.2
4	19695.00	32.9 AV	54.0	-21.1	2.24 V	113	39.1	-6.2
5	#26260.00	47.0 PK	88.2	-41.2	1.79 V	179	48.0	-1.0
6	#26260.00	34.6 AV	68.2	-33.6	1.79 V	179	35.6	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU106)	Channel	CH 155 : 6725 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	42.3 PK	88.2	-45.9	1.47 H	284	29.7	12.6
2	#13450.00	31.2 AV	68.2	-37.0	1.47 H	284	18.6	12.6
3	20175.00	44.5 PK	74.0	-29.5	1.59 H	27	49.9	-5.4
4	20175.00	33.0 AV	54.0	-21.0	1.59 H	27	38.4	-5.4
5	#26900.00	47.1 PK	88.2	-41.1	1.91 H	63	48.1	-1.0
6	#26900.00	34.8 AV	68.2	-33.4	1.91 H	63	35.8	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	39.3 PK	88.2	-48.9	3.56 V	70	26.7	12.6
2	#13450.00	27.8 AV	68.2	-40.4	3.56 V	70	15.2	12.6
3	20175.00	42.2 PK	74.0	-31.8	2.24 V	116	47.6	-5.4
4	20175.00	30.6 AV	54.0	-23.4	2.24 V	116	36.0	-5.4
5	#26900.00	48.2 PK	88.2	-40.0	1.84 V	147	49.2	-1.0
6	#26900.00	35.6 AV	68.2	-32.6	1.84 V	147	36.6	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU106)	Channel	CH 179 : 6845 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	42.8 PK	88.2	-45.4	1.50 H	297	29.6	13.2
2	#13690.00	31.1 AV	68.2	-37.1	1.50 H	297	17.9	13.2
3	20535.00	43.9 PK	74.0	-30.1	1.43 H	33	49.1	-5.2
4	20535.00	32.8 AV	54.0	-21.2	1.43 H	33	38.0	-5.2
5	#27380.00	46.7 PK	88.2	-41.5	1.86 H	92	48.1	-1.4
6	#27380.00	36.8 AV	68.2	-31.4	1.86 H	92	38.2	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	40.9 PK	88.2	-47.3	3.65 V	93	27.7	13.2
2	#13690.00	29.2 AV	68.2	-39.0	3.65 V	93	16.0	13.2
3	20535.00	43.8 PK	74.0	-30.2	2.35 V	144	49.0	-5.2
4	20535.00	32.6 AV	54.0	-21.4	2.35 V	144	37.8	-5.2
5	#27380.00	47.8 PK	88.2	-40.4	1.82 V	157	49.2	-1.4
6	#27380.00	35.1 AV	68.2	-33.1	1.82 V	157	36.5	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RU242

RF Mode	TX 40MHz Preamble 802.11ax (RU242)	Channel	CH 3 : 5965 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	41.7 PK	74.0	-32.3	1.53 H	345	30.2	11.5
2	11930.00	29.8 AV	54.0	-24.2	1.53 H	345	18.3	11.5
3	17895.00	44.7 PK	74.0	-29.3	1.67 H	27	22.6	22.1
4	17895.00	33.2 AV	54.0	-20.8	1.67 H	27	11.1	22.1
5	23860.00	49.5 PK	74.0	-24.5	2.05 H	60	52.8	-3.3
6	23860.00	38.0 AV	54.0	-16.0	2.05 H	60	41.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	39.4 PK	74.0	-34.6	3.76 V	61	27.9	11.5
2	11930.00	27.7 AV	54.0	-26.3	3.76 V	61	16.2	11.5
3	17895.00	43.4 PK	74.0	-30.6	2.27 V	100	21.3	22.1
4	17895.00	32.3 AV	54.0	-21.7	2.27 V	100	10.2	22.1
5	23860.00	46.0 PK	74.0	-28.0	1.88 V	173	49.3	-3.3
6	23860.00	34.4 AV	54.0	-19.6	1.88 V	173	37.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU242)	Channel	CH 43 : 6165 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	42.5 PK	74.0	-31.5	1.78 H	273	31.8	10.7
2	12330.00	31.0 AV	54.0	-23.0	1.78 H	273	20.3	10.7
3	18495.00	46.3 PK	74.0	-27.7	1.68 H	16	52.9	-6.6
4	18495.00	34.4 AV	54.0	-19.6	1.68 H	16	41.0	-6.6
5	#24660.00	49.8 PK	88.2	-38.4	2.04 H	53	51.9	-2.1
6	#24660.00	37.4 AV	68.2	-30.8	2.04 H	53	39.5	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	41.6 PK	74.0	-32.4	3.68 V	88	30.9	10.7
2	12330.00	29.6 AV	54.0	-24.4	3.68 V	88	18.9	10.7
3	18495.00	42.8 PK	74.0	-31.2	2.29 V	150	49.4	-6.6
4	18495.00	31.9 AV	54.0	-22.1	2.29 V	150	38.5	-6.6
5	#24660.00	47.6 PK	88.2	-40.6	1.87 V	176	49.7	-2.1
6	#24660.00	35.2 AV	68.2	-33.0	1.87 V	176	37.3	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU242)	Channel	CH 91 : 6405 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	42.5 PK	88.2	-45.7	1.60 H	296	31.7	10.8
2	#12810.00	30.1 AV	68.2	-38.1	1.60 H	296	19.3	10.8
3	19215.00	45.4 PK	74.0	-28.6	1.55 H	18	51.9	-6.5
4	19215.00	32.8 AV	54.0	-21.2	1.55 H	18	39.3	-6.5
5	#25620.00	47.1 PK	88.2	-41.1	1.90 H	96	48.4	-1.3
6	#25620.00	35.1 AV	68.2	-33.1	1.90 H	96	36.4	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	39.5 PK	88.2	-48.7	3.78 V	52	28.7	10.8
2	#12810.00	27.7 AV	68.2	-40.5	3.78 V	52	16.9	10.8
3	19215.00	43.8 PK	74.0	-30.2	2.36 V	109	50.3	-6.5
4	19215.00	32.5 AV	54.0	-21.5	2.36 V	109	39.0	-6.5
5	#25620.00	45.6 PK	88.2	-42.6	1.80 V	175	46.9	-1.3
6	#25620.00	34.1 AV	68.2	-34.1	1.80 V	175	35.4	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU242)	Channel	CH 123 : 6565 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	41.8 PK	88.2	-46.4	1.73 H	284	30.4	11.4
2	#13130.00	29.9 AV	68.2	-38.3	1.73 H	284	18.5	11.4
3	19695.00	46.6 PK	74.0	-27.4	1.67 H	33	52.8	-6.2
4	19695.00	34.7 AV	54.0	-19.3	1.67 H	33	40.9	-6.2
5	#26260.00	49.6 PK	88.2	-38.6	2.05 H	78	50.6	-1.0
6	#26260.00	37.9 AV	68.2	-30.3	2.05 H	78	38.9	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	40.4 PK	88.2	-47.8	3.85 V	65	29.0	11.4
2	#13130.00	28.6 AV	68.2	-39.6	3.85 V	65	17.2	11.4
3	19695.00	43.5 PK	74.0	-30.5	2.30 V	150	49.7	-6.2
4	19695.00	32.0 AV	54.0	-22.0	2.30 V	150	38.2	-6.2
5	#26260.00	45.1 PK	88.2	-43.1	1.85 V	138	46.1	-1.0
6	#26260.00	33.7 AV	68.2	-34.5	1.85 V	138	34.7	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU242)	Channel	CH 155 : 6725 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	42.8 PK	88.2	-45.4	1.53 H	262	30.2	12.6
2	#13450.00	30.2 AV	68.2	-38.0	1.53 H	262	17.6	12.6
3	20175.00	44.5 PK	74.0	-29.5	1.44 H	4	49.9	-5.4
4	20175.00	31.9 AV	54.0	-22.1	1.44 H	4	37.3	-5.4
5	#26900.00	48.0 PK	88.2	-40.2	1.89 H	72	49.0	-1.0
6	#26900.00	35.9 AV	68.2	-32.3	1.89 H	72	36.9	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	39.3 PK	88.2	-48.9	3.75 V	61	26.7	12.6
2	#13450.00	27.4 AV	68.2	-40.8	3.75 V	61	14.8	12.6
3	20175.00	43.8 PK	74.0	-30.2	2.25 V	139	49.2	-5.4
4	20175.00	32.7 AV	54.0	-21.3	2.25 V	139	38.1	-5.4
5	#26900.00	45.8 PK	88.2	-42.4	1.90 V	171	46.8	-1.0
6	#26900.00	33.7 AV	68.2	-34.5	1.90 V	171	34.7	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU242)	Channel	CH 179 : 6845 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	42.5 PK	88.2	-45.7	1.83 H	307	29.3	13.2
2	#13690.00	30.7 AV	68.2	-37.5	1.83 H	307	17.5	13.2
3	20535.00	47.5 PK	74.0	-26.5	1.68 H	17	52.7	-5.2
4	20535.00	35.2 AV	54.0	-18.8	1.68 H	17	40.4	-5.2
5	#27380.00	49.6 PK	88.2	-38.6	2.07 H	66	51.0	-1.4
6	#27380.00	37.5 AV	68.2	-30.7	2.07 H	66	38.9	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	40.3 PK	88.2	-47.9	3.84 V	42	27.1	13.2
2	#13690.00	28.0 AV	68.2	-40.2	3.84 V	42	14.8	13.2
3	20535.00	44.0 PK	74.0	-30.0	2.26 V	124	49.2	-5.2
4	20535.00	32.5 AV	54.0	-21.5	2.26 V	124	37.7	-5.2
5	#27380.00	45.4 PK	88.2	-42.8	1.91 V	146	46.8	-1.4
6	#27380.00	33.5 AV	68.2	-34.7	1.91 V	146	34.9	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RU484

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 3 : 5965 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	41.4 PK	74.0	-32.6	1.66 H	277	29.9	11.5
2	11930.00	29.5 AV	54.0	-24.5	1.66 H	277	18.0	11.5
3	17895.00	45.5 PK	74.0	-28.5	1.81 H	4	23.4	22.1
4	17895.00	35.2 AV	54.0	-18.8	1.81 H	4	13.1	22.1
5	23860.00	51.3 PK	74.0	-22.7	2.06 H	86	54.6	-3.3
6	23860.00	39.0 AV	54.0	-15.0	2.06 H	86	42.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	39.5 PK	74.0	-34.5	3.71 V	44	28.0	11.5
2	11930.00	27.7 AV	54.0	-26.3	3.71 V	44	16.2	11.5
3	17895.00	44.0 PK	74.0	-30.0	2.17 V	144	21.9	22.1
4	17895.00	32.4 AV	54.0	-21.6	2.17 V	144	10.3	22.1
5	23860.00	47.0 PK	74.0	-27.0	1.94 V	150	50.3	-3.3
6	23860.00	35.0 AV	54.0	-19.0	1.94 V	150	38.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 43 : 6165 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	42.1 PK	74.0	-31.9	1.91 H	267	31.4	10.7
2	12330.00	30.3 AV	54.0	-23.7	1.91 H	267	19.6	10.7
3	18495.00	48.2 PK	74.0	-25.8	1.72 H	27	54.8	-6.6
4	18495.00	36.2 AV	54.0	-17.8	1.72 H	27	42.8	-6.6
5	#24660.00	49.8 PK	88.2	-38.4	2.07 H	86	51.9	-2.1
6	#24660.00	37.6 AV	68.2	-30.6	2.07 H	86	39.7	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	40.1 PK	74.0	-33.9	3.82 V	83	29.4	10.7
2	12330.00	28.7 AV	54.0	-25.3	3.82 V	83	18.0	10.7
3	18495.00	43.6 PK	74.0	-30.4	2.31 V	112	50.2	-6.6
4	18495.00	32.1 AV	54.0	-21.9	2.31 V	112	38.7	-6.6
5	#24660.00	48.1 PK	88.2	-40.1	1.88 V	173	50.2	-2.1
6	#24660.00	35.9 AV	68.2	-32.3	1.88 V	173	38.0	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 91 : 6405 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	41.8 PK	88.2	-46.4	1.72 H	253	31.0	10.8
2	#12810.00	30.5 AV	68.2	-37.7	1.72 H	253	19.7	10.8
3	19215.00	47.0 PK	74.0	-27.0	1.75 H	23	53.5	-6.5
4	19215.00	35.0 AV	54.0	-19.0	1.75 H	23	41.5	-6.5
5	#25620.00	49.0 PK	88.2	-39.2	2.08 H	30	50.3	-1.3
6	#25620.00	36.8 AV	68.2	-31.4	2.08 H	30	38.1	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	40.9 PK	88.2	-47.3	3.86 V	92	30.1	10.8
2	#12810.00	29.1 AV	68.2	-39.1	3.86 V	92	18.3	10.8
3	19215.00	43.7 PK	74.0	-30.3	2.28 V	111	50.2	-6.5
4	19215.00	32.6 AV	54.0	-21.4	2.28 V	111	39.1	-6.5
5	#25620.00	47.5 PK	88.2	-40.7	1.79 V	132	48.8	-1.3
6	#25620.00	35.7 AV	68.2	-32.5	1.79 V	132	37.0	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 123 : 6565 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	42.8 PK	88.2	-45.4	1.78 H	272	31.4	11.4
2	#13130.00	30.7 AV	68.2	-37.5	1.78 H	272	19.3	11.4
3	19695.00	47.0 PK	74.0	-27.0	1.76 H	7	53.2	-6.2
4	19695.00	35.0 AV	54.0	-19.0	1.76 H	7	41.2	-6.2
5	#26260.00	49.4 PK	88.2	-38.8	2.03 H	49	50.4	-1.0
6	#26260.00	37.7 AV	68.2	-30.5	2.03 H	49	38.7	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	39.9 PK	88.2	-48.3	3.64 V	23	28.5	11.4
2	#13130.00	28.3 AV	68.2	-39.9	3.64 V	23	16.9	11.4
3	19695.00	44.3 PK	74.0	-29.7	2.17 V	135	50.5	-6.2
4	19695.00	32.7 AV	54.0	-21.3	2.17 V	135	38.9	-6.2
5	#26260.00	47.5 PK	88.2	-40.7	1.90 V	122	48.5	-1.0
6	#26260.00	35.5 AV	68.2	-32.7	1.90 V	122	36.5	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 155 : 6725 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	42.0 PK	88.2	-46.2	1.79 H	251	29.4	12.6
2	#13450.00	30.9 AV	68.2	-37.3	1.79 H	251	18.3	12.6
3	20175.00	47.7 PK	74.0	-26.3	1.72 H	23	53.1	-5.4
4	20175.00	34.9 AV	54.0	-19.1	1.72 H	23	40.3	-5.4
5	#26900.00	48.1 PK	88.2	-40.1	2.12 H	31	49.1	-1.0
6	#26900.00	36.5 AV	68.2	-31.7	2.12 H	31	37.5	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	40.8 PK	88.2	-47.4	3.95 V	69	28.2	12.6
2	#13450.00	28.7 AV	68.2	-39.5	3.95 V	69	16.1	12.6
3	20175.00	43.1 PK	74.0	-30.9	2.35 V	129	48.5	-5.4
4	20175.00	31.7 AV	54.0	-22.3	2.35 V	129	37.1	-5.4
5	#26900.00	46.6 PK	88.2	-41.6	1.87 V	169	47.6	-1.0
6	#26900.00	34.7 AV	68.2	-33.5	1.87 V	169	35.7	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 179 : 6845 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	42.8 PK	88.2	-45.4	1.90 H	263	29.6	13.2
2	#13690.00	30.4 AV	68.2	-37.8	1.90 H	263	17.2	13.2
3	20535.00	47.0 PK	74.0	-27.0	1.62 H	32	52.2	-5.2
4	20535.00	35.6 AV	54.0	-18.4	1.62 H	32	40.8	-5.2
5	#27380.00	50.2 PK	88.2	-38.0	2.07 H	79	51.6	-1.4
6	#27380.00	37.6 AV	68.2	-30.6	2.07 H	79	39.0	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	40.7 PK	88.2	-47.5	3.85 V	58	27.5	13.2
2	#13690.00	29.4 AV	68.2	-38.8	3.85 V	58	16.2	13.2
3	20535.00	42.8 PK	74.0	-31.2	2.20 V	96	48.0	-5.2
4	20535.00	31.7 AV	54.0	-22.3	2.20 V	96	36.9	-5.2
5	#27380.00	47.4 PK	88.2	-40.8	1.71 V	139	48.8	-1.4
6	#27380.00	35.5 AV	68.2	-32.7	1.71 V	139	36.9	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

80MHz Preamble

RU996

RF Mode	TX 80MHz Preamble 802.11ax (RU996)	Channel	CH 7 : 5985 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	41.7 PK	74.0	-32.3	1.39 H	345	30.4	11.3
2	11970.00	30.2 AV	54.0	-23.8	1.39 H	345	18.9	11.3
3	17955.00	45.6 PK	74.0	-28.4	1.59 H	3	22.0	23.6
4	17955.00	34.2 AV	54.0	-19.8	1.59 H	3	10.6	23.6
5	23940.00	49.3 PK	74.0	-24.7	2.11 H	63	52.4	-3.1
6	23940.00	37.6 AV	54.0	-16.4	2.11 H	63	40.7	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	41.6 PK	74.0	-32.4	3.86 V	95	30.3	11.3
2	11970.00	30.1 AV	54.0	-23.9	3.86 V	95	18.8	11.3
3	17955.00	44.8 PK	74.0	-29.2	2.16 V	110	21.2	23.6
4	17955.00	32.0 AV	54.0	-22.0	2.16 V	110	8.4	23.6
5	23940.00	46.1 PK	74.0	-27.9	1.96 V	150	49.2	-3.1
6	23940.00	35.7 AV	54.0	-18.3	1.96 V	150	38.8	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 80MHz Preamble 802.11ax (RU996)	Channel	CH 39 : 6145 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	42.0 PK	74.0	-32.0	1.40 H	340	31.1	10.9
2	12290.00	30.2 AV	54.0	-23.8	1.40 H	340	19.3	10.9
3	#12770.00	41.2 PK	88.2	-47.0	1.48 H	334	30.4	10.8
4	#12770.00	29.3 AV	68.2	-38.9	1.48 H	334	18.5	10.8
5	18435.00	45.6 PK	74.0	-28.4	1.59 H	33	52.2	-6.6
6	18435.00	34.1 AV	54.0	-19.9	1.59 H	33	40.7	-6.6
7	19155.00	44.9 PK	74.0	-29.1	1.69 H	8	51.4	-6.5
8	19155.00	33.7 AV	54.0	-20.3	1.69 H	8	40.2	-6.5
9	#24580.00	49.0 PK	88.2	-39.2	2.02 H	63	51.3	-2.3
10	#24580.00	37.9 AV	68.2	-30.3	2.02 H	63	40.2	-2.3
11	#25540.00	49.6 PK	88.2	-38.6	1.98 H	66	51.0	-1.4
12	#25540.00	38.0 AV	68.2	-30.2	1.98 H	66	39.4	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	39.6 PK	74.0	-34.4	3.77 V	119	28.7	10.9
2	12290.00	27.6 AV	54.0	-26.4	3.77 V	119	16.7	10.9
3	#12770.00	39.9 PK	88.2	-48.3	3.66 V	88	29.1	10.8
4	#12770.00	28.4 AV	68.2	-39.8	3.66 V	88	17.6	10.8
5	18435.00	45.4 PK	74.0	-28.6	1.94 V	79	52.0	-6.6
6	18435.00	31.6 AV	54.0	-22.4	1.94 V	79	38.2	-6.6
7	19155.00	43.6 PK	74.0	-30.4	2.28 V	97	50.1	-6.5
8	19155.00	32.8 AV	54.0	-21.2	2.28 V	97	39.3	-6.5
9	#24580.00	46.4 PK	88.2	-41.8	1.91 V	155	48.7	-2.3
10	#24580.00	35.6 AV	68.2	-32.6	1.91 V	155	37.9	-2.3
11	#25540.00	46.6 PK	88.2	-41.6	1.98 V	145	48.0	-1.4
12	#25540.00	36.1 AV	68.2	-32.1	1.98 V	145	37.5	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 80MHz Preamble 802.11ax (RU996)	Channel	CH 135 : 6625 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	41.4 PK	74.0	-32.6	1.54 H	359	29.6	11.8
2	13250.00	29.3 AV	54.0	-24.7	1.54 H	359	17.5	11.8
3	19875.00	45.9 PK	74.0	-28.1	1.76 H	20	51.9	-6.0
4	19875.00	33.8 AV	54.0	-20.2	1.76 H	20	39.8	-6.0
5	#26500.00	49.5 PK	88.2	-38.7	1.98 H	63	49.9	-0.4
6	#26500.00	37.4 AV	68.2	-30.8	1.98 H	63	37.8	-0.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	40.6 PK	74.0	-33.4	3.76 V	86	28.8	11.8
2	13250.00	29.5 AV	54.0	-24.5	3.76 V	86	17.7	11.8
3	19875.00	44.0 PK	74.0	-30.0	2.07 V	124	50.0	-6.0
4	19875.00	31.1 AV	54.0	-22.9	2.07 V	124	37.1	-6.0
5	#26500.00	46.7 PK	88.2	-41.5	1.93 V	149	47.1	-0.4
6	#26500.00	36.2 AV	68.2	-32.0	1.93 V	149	36.6	-0.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 80MHz Preamble 802.11ax (RU996)	Channel	CH 151 : 6705 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	41.7 PK	88.2	-46.5	1.56 H	349	29.4	12.3
2	#13410.00	29.6 AV	68.2	-38.6	1.56 H	349	17.3	12.3
3	20115.00	45.9 PK	74.0	-28.1	1.62 H	11	51.4	-5.5
4	20115.00	34.2 AV	54.0	-19.8	1.62 H	11	39.7	-5.5
5	#26820.00	49.0 PK	88.2	-39.2	2.06 H	44	49.8	-0.8
6	#26820.00	37.8 AV	68.2	-30.4	2.06 H	44	38.6	-0.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	41.5 PK	88.2	-46.7	3.71 V	115	29.2	12.3
2	#13410.00	30.0 AV	68.2	-38.2	3.71 V	115	17.7	12.3
3	20115.00	44.1 PK	74.0	-29.9	2.10 V	76	49.6	-5.5
4	20115.00	31.2 AV	54.0	-22.8	2.10 V	76	36.7	-5.5
5	#26820.00	45.4 PK	88.2	-42.8	1.97 V	167	46.2	-0.8
6	#26820.00	35.3 AV	68.2	-32.9	1.97 V	167	36.1	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 80MHz Preamble 802.11ax (RU996)	Channel	CH 167 : 6785 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	41.6 PK	88.2	-46.6	1.54 H	323	28.6	13.0
2	#13570.00	29.7 AV	68.2	-38.5	1.54 H	323	16.7	13.0
3	20355.00	45.6 PK	74.0	-28.4	1.69 H	4	51.1	-5.5
4	20355.00	33.9 AV	54.0	-20.1	1.69 H	4	39.4	-5.5
5	#27140.00	49.4 PK	88.2	-38.8	1.96 H	68	50.8	-1.4
6	#27140.00	37.4 AV	68.2	-30.8	1.96 H	68	38.8	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	40.3 PK	88.2	-47.9	3.73 V	86	27.3	13.0
2	#13570.00	28.5 AV	68.2	-39.7	3.73 V	86	15.5	13.0
3	20355.00	43.7 PK	74.0	-30.3	2.28 V	109	49.2	-5.5
4	20355.00	32.8 AV	54.0	-21.2	2.28 V	109	38.3	-5.5
5	#27140.00	46.4 PK	88.2	-41.8	1.95 V	180	47.8	-1.4
6	#27140.00	35.8 AV	68.2	-32.4	1.95 V	180	37.2	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

160MHz Preamble

RU1992

RF Mode	TX 160MHz Preamble 802.11ax (RU1992)	Channel	CH 15 : 6025 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	41.2 PK	74.0	-32.8	1.61 H	322	30.0	11.2
2	12050.00	29.5 AV	54.0	-24.5	1.61 H	322	18.3	11.2
3	18075.00	45.7 PK	74.0	-28.3	1.60 H	14	44.6	1.1
4	18075.00	34.1 AV	54.0	-19.9	1.60 H	14	33.0	1.1
5	#24100.00	49.6 PK	88.2	-38.6	2.10 H	73	52.5	-2.9
6	#24100.00	37.7 AV	68.2	-30.5	2.10 H	73	40.6	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	41.0 PK	74.0	-33.0	3.70 V	69	29.8	11.2
2	12050.00	29.7 AV	54.0	-24.3	3.70 V	69	18.5	11.2
3	18075.00	44.0 PK	74.0	-30.0	2.08 V	117	42.9	1.1
4	18075.00	31.1 AV	54.0	-22.9	2.08 V	117	30.0	1.1
5	#24100.00	47.2 PK	88.2	-41.0	1.90 V	166	50.1	-2.9
6	#24100.00	36.8 AV	68.2	-31.4	1.90 V	166	39.7	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 160MHz Preamble 802.11ax (RU1992)	Channel	CH 47 : 6185 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	40.6 PK	74.0	-33.4	1.51 H	288	30.2	10.4
2	12370.00	29.1 AV	54.0	-24.9	1.51 H	288	18.7	10.4
3	18555.00	44.5 PK	74.0	-29.5	1.73 H	43	51.1	-6.6
4	18555.00	33.3 AV	54.0	-20.7	1.73 H	43	39.9	-6.6
5	#24740.00	48.6 PK	88.2	-39.6	2.10 H	43	50.7	-2.1
6	#24740.00	37.4 AV	68.2	-30.8	2.10 H	43	39.5	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	40.3 PK	74.0	-33.7	3.57 V	117	29.9	10.4
2	12370.00	28.5 AV	54.0	-25.5	3.57 V	117	18.1	10.4
3	18555.00	44.3 PK	74.0	-29.7	2.21 V	119	50.9	-6.6
4	18555.00	31.0 AV	54.0	-23.0	2.21 V	119	37.6	-6.6
5	#24740.00	47.2 PK	88.2	-41.0	2.00 V	155	49.3	-2.1
6	#24740.00	36.6 AV	68.2	-31.6	2.00 V	155	38.7	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 160MHz Preamble 802.11ax (RU1992)	Channel	CH 79 : 6345 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	41.6 PK	74.0	-32.4	1.52 H	301	30.8	10.8
2	12690.00	29.4 AV	54.0	-24.6	1.52 H	301	18.6	10.8
3	19035.00	45.7 PK	74.0	-28.3	1.57 H	20	52.0	-6.3
4	19035.00	34.0 AV	54.0	-20.0	1.57 H	20	40.3	-6.3
5	#25380.00	49.9 PK	88.2	-38.3	2.03 H	63	51.5	-1.6
6	#25380.00	38.3 AV	68.2	-29.9	2.03 H	63	39.9	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	40.3 PK	74.0	-33.7	3.70 V	107	29.5	10.8
2	12690.00	29.2 AV	54.0	-24.8	3.70 V	107	18.4	10.8
3	19035.00	44.1 PK	74.0	-29.9	1.99 V	136	50.4	-6.3
4	19035.00	31.7 AV	54.0	-22.3	1.99 V	136	38.0	-6.3
5	#25380.00	46.8 PK	88.2	-41.4	1.94 V	175	48.4	-1.6
6	#25380.00	36.6 AV	68.2	-31.6	1.94 V	175	38.2	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 160MHz Preamble 802.11ax (RU1992)	Channel	CH 143 : 6665 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	40.4 PK	74.0	-33.6	1.51 H	326	28.4	12.0
2	13330.00	28.6 AV	54.0	-25.4	1.51 H	326	16.6	12.0
3	19995.00	44.0 PK	74.0	-30.0	1.69 H	23	49.9	-5.9
4	19995.00	32.8 AV	54.0	-21.2	1.69 H	23	38.7	-5.9
5	#26660.00	49.8 PK	88.2	-38.4	2.08 H	51	50.1	-0.3
6	#26660.00	38.1 AV	68.2	-30.1	2.08 H	51	38.4	-0.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	40.2 PK	74.0	-33.8	3.71 V	95	28.2	12.0
2	13330.00	28.2 AV	54.0	-25.8	3.71 V	95	16.2	12.0
3	19995.00	44.1 PK	74.0	-29.9	2.29 V	107	50.0	-5.9
4	19995.00	33.0 AV	54.0	-21.0	2.29 V	107	38.9	-5.9
5	#26660.00	45.9 PK	88.2	-42.3	2.01 V	189	46.2	-0.3
6	#26660.00	35.9 AV	68.2	-32.3	2.01 V	189	36.2	-0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.


Below 1GHz Data:

RF Mode	TX 802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.83	27.0 QP	40.0	-13.0	1.50 H	184	40.2	-13.2
2	98.12	29.3 QP	43.5	-14.2	2.00 H	82	46.7	-17.4
3	142.99	24.7 QP	43.5	-18.8	1.50 H	0	37.4	-12.7
4	251.98	23.4 QP	46.0	-22.6	1.00 H	355	37.2	-13.8
5	365.99	29.9 QP	46.0	-16.1	1.00 H	182	40.1	-10.2
6	519.11	26.4 QP	46.0	-19.6	1.50 H	87	33.0	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

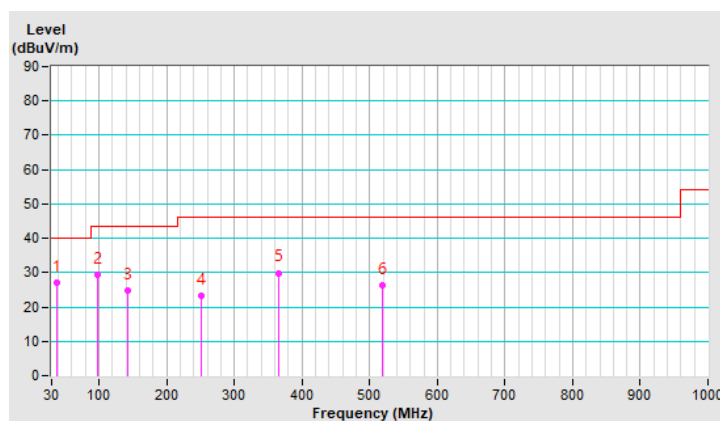


RF Mode	TX 802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.89	34.8 QP	40.0	-5.2	1.00 V	360	48.1	-13.3
2	139.46	24.9 QP	43.5	-18.6	1.50 V	186	37.9	-13.0
3	175.48	27.7 QP	43.5	-15.8	1.00 V	1	41.4	-13.7
4	318.52	26.3 QP	46.0	-19.7	1.50 V	198	37.7	-11.4
5	522.67	24.9 QP	46.0	-21.1	2.00 V	49	31.5	-6.6
6	665.48	28.4 QP	46.0	-17.6	2.00 V	199	32.3	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

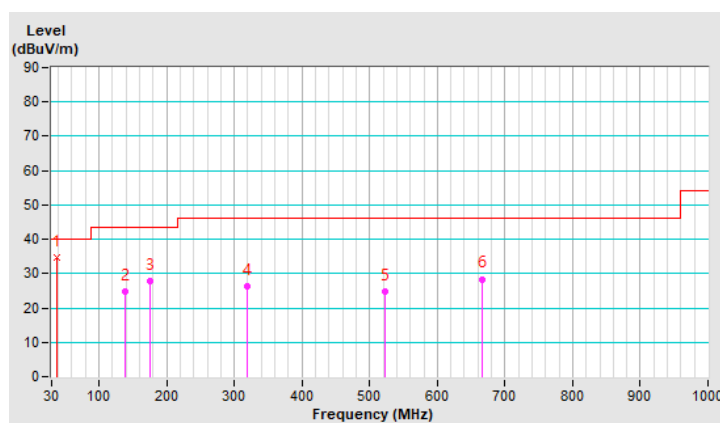

4.1.8 Test Results (Mode 2)

Radiated test was done with 50ohm terminator on antenna port

Above 1GHz Data:

RF Mode	TX 802.11a 6G	Channel	CH 2 : 5935 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	41.4 PK	74.0	-32.6	1.45 H	338	30.0	11.4
2	11870.00	30.0 AV	54.0	-24.0	1.45 H	338	18.6	11.4
3	17805.00	45.7 PK	74.0	-28.3	1.59 H	0	25.2	20.5
4	17805.00	34.5 AV	54.0	-19.5	1.59 H	0	14.0	20.5
5	23740.00	49.2 PK	74.0	-24.8	2.01 H	49	52.5	-3.3
6	23740.00	37.6 AV	54.0	-16.4	2.01 H	49	40.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	39.4 PK	74.0	-34.6	3.72 V	88	28.0	11.4
2	11870.00	27.8 AV	54.0	-26.2	3.72 V	88	16.4	11.4
3	17805.00	53.9 PK	74.0	-20.1	2.20 V	95	33.4	20.5
4	17805.00	40.0 AV	54.0	-14.0	2.20 V	95	19.5	20.5
5	23740.00	45.4 PK	74.0	-28.6	1.95 V	160	48.7	-3.3
6	23740.00	35.0 AV	54.0	-19.0	1.95 V	160	38.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11a 6G	Channel	CH 1 : 5955 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	41.8 PK	74.0	-32.2	1.49 H	329	30.3	11.5
2	11910.00	30.1 AV	54.0	-23.9	1.49 H	329	18.6	11.5
3	17865.00	45.7 PK	74.0	-28.3	1.57 H	10	24.1	21.6
4	17865.00	34.2 AV	54.0	-19.8	1.57 H	10	12.6	21.6
5	23820.00	49.3 PK	74.0	-24.7	2.06 H	61	52.6	-3.3
6	23820.00	37.7 AV	54.0	-16.3	2.06 H	61	41.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	39.8 PK	74.0	-34.2	3.76 V	102	28.3	11.5
2	11910.00	28.2 AV	54.0	-25.8	3.76 V	102	16.7	11.5
3	17865.00	53.3 PK	74.0	-20.7	2.22 V	105	31.7	21.6
4	17865.00	39.5 AV	54.0	-14.5	2.22 V	105	17.9	21.6
5	23820.00	45.5 PK	74.0	-28.5	1.90 V	161	48.8	-3.3
6	23820.00	35.2 AV	54.0	-18.8	1.90 V	161	38.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11a 6G	Channel	CH 45 : 6175 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	41.6 PK	74.0	-32.4	1.54 H	338	31.0	10.6
2	12350.00	29.8 AV	54.0	-24.2	1.54 H	338	19.2	10.6
3	18525.00	45.8 PK	74.0	-28.2	1.60 H	3	52.4	-6.6
4	18525.00	34.1 AV	54.0	-19.9	1.60 H	3	40.7	-6.6
5	#24700.00	49.6 PK	88.2	-38.6	2.05 H	66	51.7	-2.1
6	#24700.00	38.0 AV	68.2	-30.2	2.05 H	66	40.1	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	40.3 PK	74.0	-33.7	3.73 V	91	29.7	10.6
2	12350.00	28.6 AV	54.0	-25.4	3.73 V	91	18.0	10.6
3	18525.00	53.5 PK	74.0	-20.5	2.20 V	102	60.1	-6.6
4	18525.00	39.8 AV	54.0	-14.2	2.20 V	102	46.4	-6.6
5	#24700.00	46.1 PK	88.2	-42.1	1.95 V	146	48.2	-2.1
6	#24700.00	35.6 AV	68.2	-32.6	1.95 V	146	37.7	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 93 : 6415 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	42.4 PK	88.2	-45.8	1.52 H	333	31.6	10.8
2	#12830.00	30.3 AV	68.2	-37.9	1.52 H	333	19.5	10.8
3	19245.00	45.7 PK	74.0	-28.3	1.58 H	3	52.3	-6.6
4	19245.00	34.2 AV	54.0	-19.8	1.58 H	3	40.8	-6.6
5	#25660.00	49.4 PK	88.2	-38.8	2.03 H	83	50.7	-1.3
6	#25660.00	37.6 AV	68.2	-30.6	2.03 H	83	38.9	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	39.9 PK	88.2	-48.3	3.77 V	92	29.1	10.8
2	#12830.00	28.3 AV	68.2	-39.9	3.77 V	92	17.5	10.8
3	19245.00	53.8 PK	74.0	-20.2	2.16 V	107	60.4	-6.6
4	19245.00	39.9 AV	54.0	-14.1	2.16 V	107	46.5	-6.6
5	#25660.00	45.8 PK	88.2	-42.4	1.88 V	146	47.1	-1.3
6	#25660.00	35.4 AV	68.2	-32.8	1.88 V	146	36.7	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 97 : 6435 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	41.6 PK	88.2	-46.6	1.50 H	353	30.9	10.7
2	#12870.00	29.3 AV	68.2	-38.9	1.50 H	353	18.6	10.7
3	19305.00	45.4 PK	74.0	-28.6	1.62 H	5	51.9	-6.5
4	19305.00	33.7 AV	54.0	-20.3	1.62 H	5	40.2	-6.5
5	#25740.00	50.0 PK	88.2	-38.2	2.02 H	53	51.3	-1.3
6	#25740.00	38.1 AV	68.2	-30.1	2.02 H	53	39.4	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	41.4 PK	88.2	-46.8	3.75 V	88	30.7	10.7
2	#12870.00	29.4 AV	68.2	-38.8	3.75 V	88	18.7	10.7
3	19305.00	44.1 PK	74.0	-29.9	2.20 V	111	50.6	-6.5
4	19305.00	31.5 AV	54.0	-22.5	2.20 V	111	38.0	-6.5
5	#25740.00	45.3 PK	88.2	-42.9	1.85 V	174	46.6	-1.3
6	#25740.00	35.1 AV	68.2	-33.1	1.85 V	174	36.4	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 105 : 6475 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	41.5 PK	88.2	-46.7	1.52 H	350	30.8	10.7
2	#12950.00	29.5 AV	68.2	-38.7	1.52 H	350	18.8	10.7
3	19425.00	45.9 PK	74.0	-28.1	1.64 H	2	52.1	-6.2
4	19425.00	34.1 AV	54.0	-19.9	1.64 H	2	40.3	-6.2
5	#25900.00	49.8 PK	88.2	-38.4	2.04 H	70	51.0	-1.2
6	#25900.00	38.1 AV	68.2	-30.1	2.04 H	70	39.3	-1.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	41.0 PK	88.2	-47.2	3.75 V	90	30.3	10.7
2	#12950.00	29.0 AV	68.2	-39.2	3.75 V	90	18.3	10.7
3	19425.00	43.9 PK	74.0	-30.1	2.23 V	102	50.1	-6.2
4	19425.00	31.2 AV	54.0	-22.8	2.23 V	102	37.4	-6.2
5	#25900.00	45.5 PK	88.2	-42.7	1.79 V	172	46.7	-1.2
6	#25900.00	35.1 AV	68.2	-33.1	1.79 V	172	36.3	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 113 : 6515 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	41.6 PK	88.2	-46.6	1.58 H	334	30.6	11.0
2	#13030.00	29.3 AV	68.2	-38.9	1.58 H	334	18.3	11.0
3	19545.00	46.2 PK	74.0	-27.8	1.68 H	10	52.4	-6.2
4	19545.00	34.4 AV	54.0	-19.6	1.68 H	10	40.6	-6.2
5	#26060.00	49.1 PK	88.2	-39.1	1.98 H	79	50.1	-1.0
6	#26060.00	37.4 AV	68.2	-30.8	1.98 H	79	38.4	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	40.9 PK	88.2	-47.3	3.71 V	95	29.9	11.0
2	#13030.00	29.0 AV	68.2	-39.2	3.71 V	95	18.0	11.0
3	19545.00	43.6 PK	74.0	-30.4	2.19 V	92	49.8	-6.2
4	19545.00	31.0 AV	54.0	-23.0	2.19 V	92	37.2	-6.2
5	#26060.00	45.5 PK	88.2	-42.7	1.93 V	160	46.5	-1.0
6	#26060.00	34.9 AV	68.2	-33.3	1.93 V	160	35.9	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 117 : 6535 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	41.3 PK	88.2	-46.9	1.47 H	355	30.2	11.1
2	#13070.00	29.7 AV	68.2	-38.5	1.47 H	355	18.6	11.1
3	19605.00	45.6 PK	74.0	-28.4	1.66 H	2	51.8	-6.2
4	19605.00	34.1 AV	54.0	-19.9	1.66 H	2	40.3	-6.2
5	#26140.00	50.2 PK	88.2	-38.0	2.10 H	74	51.2	-1.0
6	#26140.00	38.3 AV	68.2	-29.9	2.10 H	74	39.3	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	40.1 PK	88.2	-48.1	3.76 V	93	29.0	11.1
2	#13070.00	28.5 AV	68.2	-39.7	3.76 V	93	17.4	11.1
3	19605.00	43.5 PK	74.0	-30.5	2.22 V	109	49.7	-6.2
4	19605.00	30.9 AV	54.0	-23.1	2.22 V	109	37.1	-6.2
5	#26140.00	45.3 PK	88.2	-42.9	1.83 V	181	46.3	-1.0
6	#26140.00	34.8 AV	68.2	-33.4	1.83 V	181	35.8	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 149 : 6695 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	41.8 PK	74.0	-32.2	1.46 H	350	29.5	12.3
2	13390.00	30.2 AV	54.0	-23.8	1.46 H	350	17.9	12.3
3	20085.00	45.4 PK	74.0	-28.6	1.62 H	11	51.1	-5.7
4	20085.00	34.0 AV	54.0	-20.0	1.62 H	11	39.7	-5.7
5	#26780.00	49.6 PK	88.2	-38.6	2.04 H	88	50.2	-0.6
6	#26780.00	38.0 AV	68.2	-30.2	2.04 H	88	38.6	-0.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	40.5 PK	74.0	-33.5	3.73 V	89	28.2	12.3
2	13390.00	28.8 AV	54.0	-25.2	3.73 V	89	16.5	12.3
3	20085.00	43.6 PK	74.0	-30.4	2.24 V	95	49.3	-5.7
4	20085.00	30.8 AV	54.0	-23.2	2.24 V	95	36.5	-5.7
5	#26780.00	45.8 PK	88.2	-42.4	1.95 V	152	46.4	-0.6
6	#26780.00	35.0 AV	68.2	-33.2	1.95 V	152	35.6	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 181 : 6855 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	42.1 PK	88.2	-46.1	1.42 H	353	29.0	13.1
2	#13710.00	30.3 AV	68.2	-37.9	1.42 H	353	17.2	13.1
3	20565.00	45.9 PK	74.0	-28.1	1.57 H	2	51.0	-5.1
4	20565.00	34.4 AV	54.0	-19.6	1.57 H	2	39.5	-5.1
5	#27420.00	49.4 PK	88.2	-38.8	2.00 H	79	50.9	-1.5
6	#27420.00	37.7 AV	68.2	-30.5	2.00 H	79	39.2	-1.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	40.6 PK	88.2	-47.6	3.70 V	102	27.5	13.1
2	#13710.00	29.0 AV	68.2	-39.2	3.70 V	102	15.9	13.1
3	20565.00	44.2 PK	74.0	-29.8	2.25 V	93	49.3	-5.1
4	20565.00	31.2 AV	54.0	-22.8	2.25 V	93	36.3	-5.1
5	#27420.00	45.5 PK	88.2	-42.7	1.89 V	151	47.0	-1.5
6	#27420.00	34.8 AV	68.2	-33.4	1.89 V	151	36.3	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 185 : 6875 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	43.2 PK	88.2	-45.0	1.59 H	357	29.9	13.3
2	#13750.00	32.2 AV	68.2	-36.0	1.59 H	357	18.9	13.3
3	20625.00	43.7 PK	74.0	-30.3	1.55 H	7	48.6	-4.9
4	20625.00	33.0 AV	54.0	-21.0	1.55 H	7	37.9	-4.9
5	#27500.00	50.4 PK	88.2	-37.8	2.08 H	79	51.8	-1.4
6	#27500.00	38.5 AV	68.2	-29.7	2.08 H	79	39.9	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	47.4 PK	88.2	-40.8	3.73 V	113	34.1	13.3
2	#13750.00	38.9 AV	68.2	-29.3	3.73 V	113	25.6	13.3
3	20625.00	44.4 PK	74.0	-29.6	2.23 V	114	49.3	-4.9
4	20625.00	33.7 AV	54.0	-20.3	2.23 V	114	38.6	-4.9
5	#27500.00	45.1 PK	88.2	-43.1	1.96 V	152	46.5	-1.4
6	#27500.00	34.7 AV	68.2	-33.5	1.96 V	152	36.1	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 209 : 6995 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	43.3 PK	88.2	-44.9	1.53 H	347	29.9	13.4
2	#13990.00	32.1 AV	68.2	-36.1	1.53 H	347	18.7	13.4
3	20985.00	44.3 PK	74.0	-29.7	1.59 H	7	48.8	-4.5
4	20985.00	33.4 AV	54.0	-20.6	1.59 H	7	37.9	-4.5
5	#27980.00	49.2 PK	88.2	-39.0	2.05 H	56	50.8	-1.6
6	#27980.00	37.7 AV	68.2	-30.5	2.05 H	56	39.3	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.1 PK	88.2	-41.1	3.69 V	102	33.7	13.4
2	#13990.00	38.5 AV	68.2	-29.7	3.69 V	102	25.1	13.4
3	20985.00	44.5 PK	74.0	-29.5	2.25 V	105	49.0	-4.5
4	20985.00	33.6 AV	54.0	-20.4	2.25 V	105	38.1	-4.5
5	#27980.00	45.3 PK	88.2	-42.9	1.88 V	180	46.9	-1.6
6	#27980.00	34.7 AV	68.2	-33.5	1.88 V	180	36.3	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 229 : 7095 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14190.00	41.6 PK	88.2	-46.6	1.42 H	353	27.2	14.4
2	#14190.00	30.0 AV	68.2	-38.2	1.42 H	353	15.6	14.4
3	21285.00	45.8 PK	74.0	-28.2	1.52 H	17	50.0	-4.2
4	21285.00	34.3 AV	54.0	-19.7	1.52 H	17	38.5	-4.2
5	#28380.00	49.1 PK	88.2	-39.1	1.97 H	89	50.8	-1.7
6	#28380.00	37.3 AV	68.2	-30.9	1.97 H	89	39.0	-1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14190.00	47.3 PK	88.2	-40.9	3.74 V	105	32.9	14.4
2	#14190.00	38.6 AV	68.2	-29.6	3.74 V	105	24.2	14.4
3	21285.00	44.1 PK	74.0	-29.9	2.21 V	98	48.3	-4.2
4	21285.00	33.3 AV	54.0	-20.7	2.21 V	98	37.5	-4.2
5	#28380.00	44.9 PK	88.2	-43.3	1.89 V	168	46.6	-1.7
6	#28380.00	34.5 AV	68.2	-33.7	1.89 V	168	36.2	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 233 : 7115 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	43.0 PK	88.2	-45.2	1.51 H	334	28.6	14.4
2	#14230.00	31.9 AV	68.2	-36.3	1.51 H	334	17.5	14.4
3	21345.00	43.6 PK	74.0	-30.4	1.54 H	8	47.8	-4.2
4	21345.00	33.0 AV	54.0	-21.0	1.54 H	8	37.2	-4.2
5	#28460.00	49.7 PK	88.2	-38.5	2.01 H	96	51.6	-1.9
6	#28460.00	38.3 AV	68.2	-29.9	2.01 H	96	40.2	-1.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.3 PK	88.2	-40.9	3.67 V	111	32.9	14.4
2	#14230.00	38.9 AV	68.2	-29.3	3.67 V	111	24.5	14.4
3	21345.00	44.5 PK	74.0	-29.5	2.30 V	95	48.7	-4.2
4	21345.00	33.5 AV	54.0	-20.5	2.30 V	95	37.7	-4.2
5	#28460.00	45.5 PK	88.2	-42.7	1.89 V	149	47.4	-1.9
6	#28460.00	34.9 AV	68.2	-33.3	1.89 V	149	36.8	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 2 : 5935 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	41.8 PK	74.0	-32.2	1.46 H	344	30.4	11.4
2	11870.00	30.0 AV	54.0	-24.0	1.46 H	344	18.6	11.4
3	17805.00	45.9 PK	74.0	-28.1	1.55 H	7	25.4	20.5
4	17805.00	34.2 AV	54.0	-19.8	1.55 H	7	13.7	20.5
5	23740.00	48.8 PK	74.0	-25.2	2.02 H	59	52.1	-3.3
6	23740.00	37.3 AV	54.0	-16.7	2.02 H	59	40.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	41.7 PK	74.0	-32.3	3.79 V	113	30.3	11.4
2	11870.00	29.7 AV	54.0	-24.3	3.79 V	113	18.3	11.4
3	17805.00	44.1 PK	74.0	-29.9	2.17 V	109	23.6	20.5
4	17805.00	31.0 AV	54.0	-23.0	2.17 V	109	10.5	20.5
5	23740.00	46.1 PK	74.0	-27.9	1.94 V	156	49.4	-3.3
6	23740.00	35.4 AV	54.0	-18.6	1.94 V	156	38.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE20)	Channel	CH 1 : 5955 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	41.8 PK	74.0	-32.2	1.46 H	344	30.3	11.5
2	11910.00	30.0 AV	54.0	-24.0	1.46 H	344	18.5	11.5
3	17865.00	45.9 PK	74.0	-28.1	1.55 H	7	24.3	21.6
4	17865.00	34.2 AV	54.0	-19.8	1.55 H	7	12.6	21.6
5	23820.00	48.8 PK	74.0	-25.2	2.02 H	59	52.1	-3.3
6	23820.00	37.3 AV	54.0	-16.7	2.02 H	59	40.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	41.7 PK	74.0	-32.3	3.79 V	113	30.2	11.5
2	11910.00	29.7 AV	54.0	-24.3	3.79 V	113	18.2	11.5
3	17865.00	44.1 PK	74.0	-29.9	2.17 V	109	22.5	21.6
4	17865.00	31.0 AV	54.0	-23.0	2.17 V	109	9.4	21.6
5	23820.00	46.1 PK	74.0	-27.9	1.94 V	156	49.4	-3.3
6	23820.00	35.4 AV	54.0	-18.6	1.94 V	156	38.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE20)	Channel	CH 45 : 6175 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	41.6 PK	74.0	-32.4	1.70 H	213	31.0	10.6
2	12350.00	29.6 AV	54.0	-24.4	1.70 H	213	19.0	10.6
3	18525.00	45.6 PK	74.0	-28.4	2.18 H	167	52.2	-6.6
4	18525.00	34.5 AV	54.0	-19.5	2.18 H	167	41.1	-6.6
5	#24700.00	49.3 PK	88.2	-38.9	1.99 H	80	51.4	-2.1
6	#24700.00	38.1 AV	68.2	-30.1	1.99 H	80	40.2	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	41.2 PK	74.0	-32.8	3.78 V	79	30.6	10.6
2	12350.00	29.3 AV	54.0	-24.7	3.78 V	79	18.7	10.6
3	18525.00	43.7 PK	74.0	-30.3	2.24 V	106	50.3	-6.6
4	18525.00	30.7 AV	54.0	-23.3	2.24 V	106	37.3	-6.6
5	#24700.00	45.9 PK	88.2	-42.3	1.92 V	156	48.0	-2.1
6	#24700.00	35.0 AV	68.2	-33.2	1.92 V	156	37.1	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 93 : 6415 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	42.1 PK	88.2	-46.1	1.57 H	327	31.3	10.8
2	#12830.00	29.8 AV	68.2	-38.4	1.57 H	327	19.0	10.8
3	19245.00	45.6 PK	74.0	-28.4	1.61 H	8	52.2	-6.6
4	19245.00	34.4 AV	54.0	-19.6	1.61 H	8	41.0	-6.6
5	#25660.00	49.1 PK	88.2	-39.1	2.09 H	57	50.4	-1.3
6	#25660.00	37.8 AV	68.2	-30.4	2.09 H	57	39.1	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	40.5 PK	88.2	-47.7	3.82 V	86	29.7	10.8
2	#12830.00	28.8 AV	68.2	-39.4	3.82 V	86	18.0	10.8
3	19245.00	44.3 PK	74.0	-29.7	2.17 V	115	50.9	-6.6
4	19245.00	32.0 AV	54.0	-22.0	2.17 V	115	38.6	-6.6
5	#25660.00	46.1 PK	88.2	-42.1	1.95 V	147	47.4	-1.3
6	#25660.00	35.2 AV	68.2	-33.0	1.95 V	147	36.5	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 97 : 6435 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	41.3 PK	88.2	-46.9	1.53 H	352	30.6	10.7
2	#12870.00	29.1 AV	68.2	-39.1	1.53 H	352	18.4	10.7
3	19305.00	45.0 PK	74.0	-29.0	1.58 H	14	51.5	-6.5
4	19305.00	33.4 AV	54.0	-20.6	1.58 H	14	39.9	-6.5
5	#25740.00	49.2 PK	88.2	-39.0	2.01 H	93	50.5	-1.3
6	#25740.00	37.9 AV	68.2	-30.3	2.01 H	93	39.2	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	41.6 PK	88.2	-46.6	3.73 V	91	30.9	10.7
2	#12870.00	29.8 AV	68.2	-38.4	3.73 V	91	19.1	10.7
3	19305.00	44.0 PK	74.0	-30.0	2.20 V	127	50.5	-6.5
4	19305.00	31.7 AV	54.0	-22.3	2.20 V	127	38.2	-6.5
5	#25740.00	45.4 PK	88.2	-42.8	1.87 V	169	46.7	-1.3
6	#25740.00	34.7 AV	68.2	-33.5	1.87 V	169	36.0	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 105 : 6475 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	41.0 PK	88.2	-47.2	1.53 H	347	30.3	10.7
2	#12950.00	29.3 AV	68.2	-38.9	1.53 H	347	18.6	10.7
3	19425.00	45.8 PK	74.0	-28.2	1.62 H	5	52.0	-6.2
4	19425.00	33.8 AV	54.0	-20.2	1.62 H	5	40.0	-6.2
5	#25900.00	48.6 PK	88.2	-39.6	2.10 H	52	49.8	-1.2
6	#25900.00	37.4 AV	68.2	-30.8	2.10 H	52	38.6	-1.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	40.9 PK	88.2	-47.3	3.70 V	96	30.2	10.7
2	#12950.00	28.8 AV	68.2	-39.4	3.70 V	96	18.1	10.7
3	19425.00	44.4 PK	74.0	-29.6	2.28 V	102	50.6	-6.2
4	19425.00	31.6 AV	54.0	-22.4	2.28 V	102	37.8	-6.2
5	#25900.00	45.4 PK	88.2	-42.8	2.00 V	142	46.6	-1.2
6	#25900.00	34.8 AV	68.2	-33.4	2.00 V	142	36.0	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 113 : 6515 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	41.8 PK	88.2	-46.4	1.57 H	330	30.8	11.0
2	#13030.00	29.8 AV	68.2	-38.4	1.57 H	330	18.8	11.0
3	19545.00	46.3 PK	74.0	-27.7	1.65 H	15	52.5	-6.2
4	19545.00	34.7 AV	54.0	-19.3	1.65 H	15	40.9	-6.2
5	#26060.00	49.8 PK	88.2	-38.4	1.99 H	88	50.8	-1.0
6	#26060.00	37.8 AV	68.2	-30.4	1.99 H	88	38.8	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	41.1 PK	88.2	-47.1	3.76 V	92	30.1	11.0
2	#13030.00	29.1 AV	68.2	-39.1	3.76 V	92	18.1	11.0
3	19545.00	43.5 PK	74.0	-30.5	2.17 V	95	49.7	-6.2
4	19545.00	31.1 AV	54.0	-22.9	2.17 V	95	37.3	-6.2
5	#26060.00	46.2 PK	88.2	-42.0	1.89 V	147	47.2	-1.0
6	#26060.00	35.4 AV	68.2	-32.8	1.89 V	147	36.4	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 117 : 6535 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	41.2 PK	88.2	-47.0	1.47 H	356	30.1	11.1
2	#13070.00	29.4 AV	68.2	-38.8	1.47 H	356	18.3	11.1
3	19605.00	45.1 PK	74.0	-28.9	1.70 H	13	51.3	-6.2
4	19605.00	33.7 AV	54.0	-20.3	1.70 H	13	39.9	-6.2
5	#26140.00	49.6 PK	88.2	-38.6	2.15 H	53	50.6	-1.0
6	#26140.00	38.0 AV	68.2	-30.2	2.15 H	53	39.0	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	40.5 PK	88.2	-47.7	3.76 V	83	29.4	11.1
2	#13070.00	28.9 AV	68.2	-39.3	3.76 V	83	17.8	11.1
3	19605.00	43.2 PK	74.0	-30.8	2.22 V	116	49.4	-6.2
4	19605.00	30.8 AV	54.0	-23.2	2.22 V	116	37.0	-6.2
5	#26140.00	46.5 PK	88.2	-41.7	1.93 V	134	47.5	-1.0
6	#26140.00	35.4 AV	68.2	-32.8	1.93 V	134	36.4	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 149 : 6695 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	41.6 PK	74.0	-32.4	1.52 H	356	29.3	12.3
2	13390.00	29.7 AV	54.0	-24.3	1.52 H	356	17.4	12.3
3	20085.00	45.4 PK	74.0	-28.6	1.64 H	8	51.1	-5.7
4	20085.00	33.8 AV	54.0	-20.2	1.64 H	8	39.5	-5.7
5	#26780.00	49.9 PK	88.2	-38.3	1.99 H	104	50.5	-0.6
6	#26780.00	38.3 AV	68.2	-29.9	1.99 H	104	38.9	-0.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	40.2 PK	74.0	-33.8	3.75 V	106	27.9	12.3
2	13390.00	28.4 AV	54.0	-25.6	3.75 V	106	16.1	12.3
3	20085.00	43.3 PK	74.0	-30.7	2.18 V	90	49.0	-5.7
4	20085.00	30.3 AV	54.0	-23.7	2.18 V	90	36.0	-5.7
5	#26780.00	45.8 PK	88.2	-42.4	1.94 V	136	46.4	-0.6
6	#26780.00	35.1 AV	68.2	-33.1	1.94 V	136	35.7	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 181 : 6855 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	41.5 PK	88.2	-46.7	1.44 H	342	28.4	13.1
2	#13710.00	29.9 AV	68.2	-38.3	1.44 H	342	16.8	13.1
3	20565.00	46.4 PK	74.0	-27.6	1.57 H	6	51.5	-5.1
4	20565.00	34.6 AV	54.0	-19.4	1.57 H	6	39.7	-5.1
5	#27420.00	49.8 PK	88.2	-38.4	2.02 H	103	51.3	-1.5
6	#27420.00	37.6 AV	68.2	-30.6	2.02 H	103	39.1	-1.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	40.4 PK	88.2	-47.8	3.68 V	87	27.3	13.1
2	#13710.00	28.7 AV	68.2	-39.5	3.68 V	87	15.6	13.1
3	20565.00	44.7 PK	74.0	-29.3	2.20 V	107	49.8	-5.1
4	20565.00	31.5 AV	54.0	-22.5	2.20 V	107	36.6	-5.1
5	#27420.00	46.2 PK	88.2	-42.0	1.91 V	150	47.7	-1.5
6	#27420.00	35.5 AV	68.2	-32.7	1.91 V	150	37.0	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 185 : 6875 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	43.4 PK	88.2	-44.8	1.58 H	357	30.1	13.3
2	#13750.00	32.3 AV	68.2	-35.9	1.58 H	357	19.0	13.3
3	20625.00	43.5 PK	74.0	-30.5	1.59 H	6	48.4	-4.9
4	20625.00	32.5 AV	54.0	-21.5	1.59 H	6	37.4	-4.9
5	#27500.00	50.2 PK	88.2	-38.0	2.19 H	40	51.6	-1.4
6	#27500.00	38.4 AV	68.2	-29.8	2.19 H	40	39.8	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	47.5 PK	88.2	-40.7	3.74 V	111	34.2	13.3
2	#13750.00	39.1 AV	68.2	-29.1	3.74 V	111	25.8	13.3
3	20625.00	44.1 PK	74.0	-29.9	2.26 V	127	49.0	-4.9
4	20625.00	33.7 AV	54.0	-20.3	2.26 V	127	38.6	-4.9
5	#27500.00	46.9 PK	88.2	-41.3	1.88 V	140	48.3	-1.4
6	#27500.00	35.8 AV	68.2	-32.4	1.88 V	140	37.2	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 209 : 6995 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	41.2 PK	88.2	-47.0	1.55 H	343	27.8	13.4
2	#13990.00	29.3 AV	68.2	-38.9	1.55 H	343	15.9	13.4
3	20985.00	43.9 PK	74.0	-30.1	1.63 H	12	48.4	-4.5
4	20985.00	30.6 AV	54.0	-23.4	1.63 H	12	35.1	-4.5
5	#27980.00	49.2 PK	88.2	-39.0	2.03 H	89	50.8	-1.6
6	#27980.00	37.1 AV	68.2	-31.1	2.03 H	89	38.7	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.6 PK	88.2	-40.6	3.74 V	98	34.2	13.4
2	#13990.00	39.2 AV	68.2	-29.0	3.74 V	98	25.8	13.4
3	20985.00	43.6 PK	74.0	-30.4	2.23 V	112	48.1	-4.5
4	20985.00	33.2 AV	54.0	-20.8	2.23 V	112	37.7	-4.5
5	#27980.00	47.2 PK	88.2	-41.0	1.83 V	130	48.8	-1.6
6	#27980.00	35.9 AV	68.2	-32.3	1.83 V	130	37.5	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 229 : 7095 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14190.00	40.7 PK	88.2	-47.5	1.52 H	358	26.3	14.4
2	#14190.00	29.1 AV	68.2	-39.1	1.52 H	358	14.7	14.4
3	21285.00	43.7 PK	74.0	-30.3	1.64 H	2	47.9	-4.2
4	21285.00	30.1 AV	54.0	-23.9	1.64 H	2	34.3	-4.2
5	#28380.00	49.6 PK	88.2	-38.6	2.02 H	99	51.3	-1.7
6	#28380.00	37.4 AV	68.2	-30.8	2.02 H	99	39.1	-1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14190.00	47.5 PK	88.2	-40.7	3.74 V	89	33.1	14.4
2	#14190.00	39.2 AV	68.2	-29.0	3.74 V	89	24.8	14.4
3	21285.00	43.1 PK	74.0	-30.9	2.24 V	105	47.3	-4.2
4	21285.00	32.9 AV	54.0	-21.1	2.24 V	105	37.1	-4.2
5	#28380.00	46.9 PK	88.2	-41.3	1.88 V	122	48.6	-1.7
6	#28380.00	35.7 AV	68.2	-32.5	1.88 V	122	37.4	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 233 : 7115 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	43.0 PK	88.2	-45.2	1.46 H	349	28.6	14.4
2	#14230.00	31.9 AV	68.2	-36.3	1.46 H	349	17.5	14.4
3	21345.00	43.0 PK	74.0	-31.0	1.56 H	12	47.2	-4.2
4	21345.00	32.7 AV	54.0	-21.3	1.56 H	12	36.9	-4.2
5	#28460.00	50.1 PK	88.2	-38.1	1.97 H	95	52.0	-1.9
6	#28460.00	38.4 AV	68.2	-29.8	1.97 H	95	40.3	-1.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.3 PK	88.2	-40.9	3.62 V	107	32.9	14.4
2	#14230.00	39.0 AV	68.2	-29.2	3.62 V	107	24.6	14.4
3	21345.00	44.2 PK	74.0	-29.8	2.25 V	91	48.4	-4.2
4	21345.00	33.3 AV	54.0	-20.7	2.25 V	91	37.5	-4.2
5	#28460.00	46.8 PK	88.2	-41.4	1.96 V	146	48.7	-1.9
6	#28460.00	35.7 AV	68.2	-32.5	1.96 V	146	37.6	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 3 : 5965 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	41.5 PK	74.0	-32.5	1.46 H	336	30.0	11.5
2	11930.00	30.1 AV	54.0	-23.9	1.46 H	336	18.6	11.5
3	17895.00	45.9 PK	74.0	-28.1	1.54 H	13	23.8	22.1
4	17895.00	34.3 AV	54.0	-19.7	1.54 H	13	12.2	22.1
5	23860.00	50.0 PK	74.0	-24.0	2.14 H	43	53.3	-3.3
6	23860.00	38.1 AV	54.0	-15.9	2.14 H	43	41.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	40.9 PK	74.0	-33.1	3.69 V	96	29.4	11.5
2	11930.00	28.9 AV	54.0	-25.1	3.69 V	96	17.4	11.5
3	17895.00	44.6 PK	74.0	-29.4	2.20 V	122	22.5	22.1
4	17895.00	31.6 AV	54.0	-22.4	2.20 V	122	9.5	22.1
5	23860.00	46.9 PK	74.0	-27.1	1.88 V	130	50.2	-3.3
6	23860.00	35.4 AV	54.0	-18.6	1.88 V	130	38.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE40)	Channel	CH 43 : 6165 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	41.6 PK	74.0	-32.4	1.43 H	328	30.9	10.7
2	12330.00	29.8 AV	54.0	-24.2	1.43 H	328	19.1	10.7
3	18495.00	46.3 PK	74.0	-27.7	1.59 H	7	52.9	-6.6
4	18495.00	34.5 AV	54.0	-19.5	1.59 H	7	41.1	-6.6
5	#24660.00	50.2 PK	88.2	-38.0	2.06 H	94	52.3	-2.1
6	#24660.00	37.8 AV	68.2	-30.4	2.06 H	94	39.9	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	40.0 PK	74.0	-34.0	3.68 V	99	29.3	10.7
2	12330.00	28.4 AV	54.0	-25.6	3.68 V	99	17.7	10.7
3	18495.00	44.7 PK	74.0	-29.3	2.20 V	123	51.3	-6.6
4	18495.00	31.7 AV	54.0	-22.3	2.20 V	123	38.3	-6.6
5	#24660.00	46.9 PK	88.2	-41.3	1.99 V	139	49.0	-2.1
6	#24660.00	36.0 AV	68.2	-32.2	1.99 V	139	38.1	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 91 : 6405 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	42.1 PK	88.2	-46.1	1.46 H	328	31.3	10.8
2	#12810.00	30.4 AV	68.2	-37.8	1.46 H	328	19.6	10.8
3	19215.00	46.7 PK	74.0	-27.3	1.56 H	11	53.2	-6.5
4	19215.00	34.7 AV	54.0	-19.3	1.56 H	11	41.2	-6.5
5	#25620.00	49.6 PK	88.2	-38.6	2.09 H	34	50.9	-1.3
6	#25620.00	37.7 AV	68.2	-30.5	2.09 H	34	39.0	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	41.0 PK	88.2	-47.2	3.72 V	95	30.2	10.8
2	#12810.00	29.0 AV	68.2	-39.2	3.72 V	95	18.2	10.8
3	19215.00	44.5 PK	74.0	-29.5	2.22 V	106	51.0	-6.5
4	19215.00	31.4 AV	54.0	-22.6	2.22 V	106	37.9	-6.5
5	#25620.00	47.2 PK	88.2	-41.0	1.85 V	136	48.5	-1.3
6	#25620.00	35.8 AV	68.2	-32.4	1.85 V	136	37.1	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 99 : 6445 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	40.8 PK	88.2	-47.4	1.46 H	331	30.1	10.7
2	#12890.00	29.5 AV	68.2	-38.7	1.46 H	331	18.8	10.7
3	19335.00	46.3 PK	74.0	-27.7	1.53 H	3	52.8	-6.5
4	19335.00	34.7 AV	54.0	-19.3	1.53 H	3	41.2	-6.5
5	#25780.00	50.3 PK	88.2	-37.9	2.04 H	104	51.5	-1.2
6	#25780.00	37.9 AV	68.2	-30.3	2.04 H	104	39.1	-1.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	40.5 PK	88.2	-47.7	3.64 V	89	29.8	10.7
2	#12890.00	29.1 AV	68.2	-39.1	3.64 V	89	18.4	10.7
3	19335.00	45.1 PK	74.0	-28.9	2.20 V	109	51.6	-6.5
4	19335.00	31.7 AV	54.0	-22.3	2.20 V	109	38.2	-6.5
5	#25780.00	47.9 PK	88.2	-40.3	1.90 V	133	49.1	-1.2
6	#25780.00	36.3 AV	68.2	-31.9	1.90 V	133	37.5	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 107 : 6485 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	40.2 PK	88.2	-48.0	1.47 H	344	29.4	10.8
2	#12970.00	29.1 AV	68.2	-39.1	1.47 H	344	18.3	10.8
3	19455.00	45.8 PK	74.0	-28.2	1.57 H	11	52.0	-6.2
4	19455.00	34.5 AV	54.0	-19.5	1.57 H	11	40.7	-6.2
5	#25940.00	49.3 PK	88.2	-38.9	2.05 H	32	50.4	-1.1
6	#25940.00	37.3 AV	68.2	-30.9	2.05 H	32	38.4	-1.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	40.8 PK	88.2	-47.4	3.74 V	94	30.0	10.8
2	#12970.00	29.1 AV	68.2	-39.1	3.74 V	94	18.3	10.8
3	19455.00	44.4 PK	74.0	-29.6	2.18 V	96	50.6	-6.2
4	19455.00	31.2 AV	54.0	-22.8	2.18 V	96	37.4	-6.2
5	#25940.00	47.0 PK	88.2	-41.2	1.93 V	125	48.1	-1.1
6	#25940.00	35.4 AV	68.2	-32.8	1.93 V	125	36.5	-1.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 115 : 6525 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	40.9 PK	88.2	-47.3	1.47 H	333	29.8	11.1
2	#13050.00	29.4 AV	68.2	-38.8	1.47 H	333	18.3	11.1
3	19575.00	45.9 PK	74.0	-28.1	1.58 H	13	52.2	-6.3
4	19575.00	34.3 AV	54.0	-19.7	1.58 H	13	40.6	-6.3
5	#26100.00	49.7 PK	88.2	-38.5	2.05 H	115	50.7	-1.0
6	#26100.00	37.6 AV	68.2	-30.6	2.05 H	115	38.6	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	40.5 PK	88.2	-47.7	3.66 V	71	29.4	11.1
2	#13050.00	28.6 AV	68.2	-39.6	3.66 V	71	17.5	11.1
3	19575.00	44.6 PK	74.0	-29.4	2.18 V	123	50.9	-6.3
4	19575.00	31.7 AV	54.0	-22.3	2.18 V	123	38.0	-6.3
5	#26100.00	46.9 PK	88.2	-41.3	1.82 V	148	47.9	-1.0
6	#26100.00	35.3 AV	68.2	-32.9	1.82 V	148	36.3	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 123 : 6565 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	40.2 PK	88.2	-48.0	1.41 H	321	28.8	11.4
2	#13130.00	29.0 AV	68.2	-39.2	1.41 H	321	17.6	11.4
3	19695.00	46.4 PK	74.0	-27.6	1.59 H	8	52.6	-6.2
4	19695.00	34.6 AV	54.0	-19.4	1.59 H	8	40.8	-6.2
5	#26260.00	49.7 PK	88.2	-38.5	2.01 H	41	50.7	-1.0
6	#26260.00	37.7 AV	68.2	-30.5	2.01 H	41	38.7	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	39.9 PK	88.2	-48.3	3.70 V	90	28.5	11.4
2	#13130.00	28.3 AV	68.2	-39.9	3.70 V	90	16.9	11.4
3	19695.00	44.5 PK	74.0	-29.5	2.21 V	110	50.7	-6.2
4	19695.00	31.3 AV	54.0	-22.7	2.21 V	110	37.5	-6.2
5	#26260.00	47.4 PK	88.2	-40.8	1.89 V	122	48.4	-1.0
6	#26260.00	36.0 AV	68.2	-32.2	1.89 V	122	37.0	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 155 : 6725 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	40.5 PK	88.2	-47.7	1.42 H	343	27.9	12.6
2	#13450.00	29.1 AV	68.2	-39.1	1.42 H	343	16.5	12.6
3	20175.00	46.1 PK	74.0	-27.9	1.54 H	20	51.5	-5.4
4	20175.00	34.8 AV	54.0	-19.2	1.54 H	20	40.2	-5.4
5	#26900.00	49.7 PK	88.2	-38.5	2.07 H	35	50.7	-1.0
6	#26900.00	37.7 AV	68.2	-30.5	2.07 H	35	38.7	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	40.8 PK	88.2	-47.4	3.63 V	94	28.2	12.6
2	#13450.00	29.0 AV	68.2	-39.2	3.63 V	94	16.4	12.6
3	20175.00	44.5 PK	74.0	-29.5	2.19 V	120	49.9	-5.4
4	20175.00	31.2 AV	54.0	-22.8	2.19 V	120	36.6	-5.4
5	#26900.00	47.1 PK	88.2	-41.1	1.80 V	138	48.1	-1.0
6	#26900.00	35.3 AV	68.2	-32.9	1.80 V	138	36.3	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 179 : 6845 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	40.7 PK	88.2	-47.5	1.46 H	332	27.5	13.2
2	#13690.00	29.1 AV	68.2	-39.1	1.46 H	332	15.9	13.2
3	20535.00	46.6 PK	74.0	-27.4	1.58 H	3	51.8	-5.2
4	20535.00	35.0 AV	54.0	-19.0	1.58 H	3	40.2	-5.2
5	#27380.00	49.2 PK	88.2	-39.0	2.10 H	127	50.6	-1.4
6	#27380.00	37.1 AV	68.2	-31.1	2.10 H	127	38.5	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	40.6 PK	88.2	-47.6	3.70 V	85	27.4	13.2
2	#13690.00	28.8 AV	68.2	-39.4	3.70 V	85	15.6	13.2
3	20535.00	45.4 PK	74.0	-28.6	2.17 V	116	50.6	-5.2
4	20535.00	32.0 AV	54.0	-22.0	2.17 V	116	37.2	-5.2
5	#27380.00	47.4 PK	88.2	-40.8	1.85 V	143	48.8	-1.4
6	#27380.00	35.6 AV	68.2	-32.6	1.85 V	143	37.0	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 187 : 6885 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	41.1 PK	88.2	-47.1	1.40 H	317	27.8	13.3
2	#13770.00	29.5 AV	68.2	-38.7	1.40 H	317	16.2	13.3
3	20655.00	46.9 PK	74.0	-27.1	1.55 H	2	51.8	-4.9
4	20655.00	35.1 AV	54.0	-18.9	1.55 H	2	40.0	-4.9
5	#27540.00	49.3 PK	88.2	-38.9	1.98 H	48	50.8	-1.5
6	#27540.00	37.3 AV	68.2	-30.9	1.98 H	48	38.8	-1.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	40.0 PK	88.2	-48.2	3.73 V	80	26.7	13.3
2	#13770.00	28.3 AV	68.2	-39.9	3.73 V	80	15.0	13.3
3	20655.00	44.4 PK	74.0	-29.6	2.24 V	91	49.3	-4.9
4	20655.00	31.2 AV	54.0	-22.8	2.24 V	91	36.1	-4.9
5	#27540.00	47.1 PK	88.2	-41.1	1.80 V	133	48.6	-1.5
6	#27540.00	35.5 AV	68.2	-32.7	1.80 V	133	37.0	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 211 : 7005 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	40.9 PK	88.2	-47.3	1.44 H	332	27.4	13.5
2	#14010.00	29.1 AV	68.2	-39.1	1.44 H	332	15.6	13.5
3	21015.00	46.0 PK	74.0	-28.0	1.58 H	14	50.5	-4.5
4	21015.00	34.5 AV	54.0	-19.5	1.58 H	14	39.0	-4.5
5	#28020.00	49.8 PK	88.2	-38.4	1.98 H	50	51.5	-1.7
6	#28020.00	37.6 AV	68.2	-30.6	1.98 H	50	39.3	-1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	40.9 PK	88.2	-47.3	3.66 V	94	27.4	13.5
2	#14010.00	29.1 AV	68.2	-39.1	3.66 V	94	15.6	13.5
3	21015.00	44.8 PK	74.0	-29.2	2.23 V	121	49.3	-4.5
4	21015.00	31.9 AV	54.0	-22.1	2.23 V	121	36.4	-4.5
5	#28020.00	47.2 PK	88.2	-41.0	1.75 V	133	48.9	-1.7
6	#28020.00	35.4 AV	68.2	-32.8	1.75 V	133	37.1	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 227 : 7085 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	40.5 PK	88.2	-47.7	1.40 H	320	26.2	14.3
2	#14170.00	28.6 AV	68.2	-39.6	1.40 H	320	14.3	14.3
3	21255.00	46.0 PK	74.0	-28.0	1.61 H	15	50.3	-4.3
4	21255.00	34.7 AV	54.0	-19.3	1.61 H	15	39.0	-4.3
5	#28340.00	48.8 PK	88.2	-39.4	2.05 H	121	50.4	-1.6
6	#28340.00	36.8 AV	68.2	-31.4	2.05 H	121	38.4	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	40.6 PK	88.2	-47.6	3.64 V	88	26.3	14.3
2	#14170.00	29.0 AV	68.2	-39.2	3.64 V	88	14.7	14.3
3	21255.00	44.6 PK	74.0	-29.4	2.24 V	94	48.9	-4.3
4	21255.00	31.5 AV	54.0	-22.5	2.24 V	94	35.8	-4.3
5	#28340.00	47.5 PK	88.2	-40.7	1.89 V	130	49.1	-1.6
6	#28340.00	35.8 AV	68.2	-32.4	1.89 V	130	37.4	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 7 : 5985 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	40.8 PK	74.0	-33.2	1.49 H	339	29.5	11.3
2	11970.00	29.3 AV	54.0	-24.7	1.49 H	339	18.0	11.3
3	17955.00	46.8 PK	74.0	-27.2	1.63 H	17	23.2	23.6
4	17955.00	35.2 AV	54.0	-18.8	1.63 H	17	11.6	23.6
5	23940.00	49.7 PK	74.0	-24.3	1.95 H	52	52.8	-3.1
6	23940.00	37.5 AV	54.0	-16.5	1.95 H	52	40.6	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	40.6 PK	74.0	-33.4	3.72 V	94	29.3	11.3
2	11970.00	29.1 AV	54.0	-24.9	3.72 V	94	17.8	11.3
3	17955.00	45.1 PK	74.0	-28.9	2.23 V	101	21.5	23.6
4	17955.00	31.7 AV	54.0	-22.3	2.23 V	101	8.1	23.6
5	23940.00	47.7 PK	74.0	-26.3	1.84 V	149	50.8	-3.1
6	23940.00	36.0 AV	54.0	-18.0	1.84 V	149	39.1	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE80)	Channel	CH 39 : 6145 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	41.3 PK	74.0	-32.7	1.44 H	328	30.4	10.9
2	12290.00	29.5 AV	54.0	-24.5	1.44 H	328	18.6	10.9
3	18435.00	47.0 PK	74.0	-27.0	1.56 H	2	53.6	-6.6
4	18435.00	35.2 AV	54.0	-18.8	1.56 H	2	41.8	-6.6
5	#24580.00	49.2 PK	88.2	-39.0	1.98 H	48	51.5	-2.3
6	#24580.00	37.0 AV	68.2	-31.2	1.98 H	48	39.3	-2.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	40.6 PK	74.0	-33.4	3.70 V	76	29.7	10.9
2	12290.00	29.0 AV	54.0	-25.0	3.70 V	76	18.1	10.9
3	18435.00	44.9 PK	74.0	-29.1	2.19 V	107	51.5	-6.6
4	18435.00	31.8 AV	54.0	-22.2	2.19 V	107	38.4	-6.6
5	#24580.00	47.8 PK	88.2	-40.4	1.85 V	142	50.1	-2.3
6	#24580.00	36.1 AV	68.2	-32.1	1.85 V	142	38.4	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 87 : 6385 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	40.2 PK	88.2	-48.0	1.51 H	346	29.4	10.8
2	#12770.00	28.9 AV	68.2	-39.3	1.51 H	346	18.1	10.8
3	19155.00	46.5 PK	74.0	-27.5	1.61 H	13	53.0	-6.5
4	19155.00	35.1 AV	54.0	-18.9	1.61 H	13	41.6	-6.5
5	#25540.00	48.8 PK	88.2	-39.4	2.08 H	109	50.2	-1.4
6	#25540.00	36.9 AV	68.2	-31.3	2.08 H	109	38.3	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	40.7 PK	88.2	-47.5	3.72 V	83	29.9	10.8
2	#12770.00	29.0 AV	68.2	-39.2	3.72 V	83	18.2	10.8
3	19155.00	45.1 PK	74.0	-28.9	2.18 V	120	51.6	-6.5
4	19155.00	31.9 AV	54.0	-22.1	2.18 V	120	38.4	-6.5
5	#25540.00	47.3 PK	88.2	-40.9	1.88 V	148	48.7	-1.4
6	#25540.00	35.6 AV	68.2	-32.6	1.88 V	148	37.0	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 103 : 6465 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	40.9 PK	88.2	-47.3	1.46 H	328	30.2	10.7
2	#12930.00	29.1 AV	68.2	-39.1	1.46 H	328	18.4	10.7
3	19395.00	46.3 PK	74.0	-27.7	1.64 H	11	52.5	-6.2
4	19395.00	34.6 AV	54.0	-19.4	1.64 H	11	40.8	-6.2
5	#25860.00	48.9 PK	88.2	-39.3	1.98 H	33	50.2	-1.3
6	#25860.00	37.1 AV	68.2	-31.1	1.98 H	33	38.4	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	40.2 PK	88.2	-48.0	3.68 V	83	29.5	10.7
2	#12930.00	28.8 AV	68.2	-39.4	3.68 V	83	18.1	10.7
3	19395.00	44.5 PK	74.0	-29.5	2.19 V	109	50.7	-6.2
4	19395.00	31.2 AV	54.0	-22.8	2.19 V	109	37.4	-6.2
5	#25860.00	47.0 PK	88.2	-41.2	1.92 V	124	48.3	-1.3
6	#25860.00	35.4 AV	68.2	-32.8	1.92 V	124	36.7	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 119 : 6545 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	40.3 PK	88.2	-47.9	1.52 H	329	29.0	11.3
2	#13090.00	29.0 AV	68.2	-39.2	1.52 H	329	17.7	11.3
3	19635.00	46.3 PK	74.0	-27.7	1.56 H	3	52.6	-6.3
4	19635.00	34.9 AV	54.0	-19.1	1.56 H	3	41.2	-6.3
5	#26180.00	49.1 PK	88.2	-39.1	2.09 H	123	50.1	-1.0
6	#26180.00	37.0 AV	68.2	-31.2	2.09 H	123	38.0	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	39.8 PK	88.2	-48.4	3.70 V	85	28.5	11.3
2	#13090.00	28.3 AV	68.2	-39.9	3.70 V	85	17.0	11.3
3	19635.00	44.2 PK	74.0	-29.8	2.15 V	117	50.5	-6.3
4	19635.00	31.1 AV	54.0	-22.9	2.15 V	117	37.4	-6.3
5	#26180.00	46.7 PK	88.2	-41.5	1.82 V	138	47.7	-1.0
6	#26180.00	35.2 AV	68.2	-33.0	1.82 V	138	36.2	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 151 : 6705 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	40.8 PK	88.2	-47.4	1.46 H	346	28.5	12.3
2	#13410.00	29.4 AV	68.2	-38.8	1.46 H	346	17.1	12.3
3	20115.00	46.9 PK	74.0	-27.1	1.60 H	5	52.4	-5.5
4	20115.00	35.2 AV	54.0	-18.8	1.60 H	5	40.7	-5.5
5	#26820.00	49.0 PK	88.2	-39.2	2.04 H	94	49.8	-0.8
6	#26820.00	37.3 AV	68.2	-30.9	2.04 H	94	38.1	-0.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	40.4 PK	88.2	-47.8	3.64 V	99	28.1	12.3
2	#13410.00	28.4 AV	68.2	-39.8	3.64 V	99	16.1	12.3
3	20115.00	44.4 PK	74.0	-29.6	2.17 V	94	49.9	-5.5
4	20115.00	31.3 AV	54.0	-22.7	2.17 V	94	36.8	-5.5
5	#26820.00	47.2 PK	88.2	-41.0	1.95 V	115	48.0	-0.8
6	#26820.00	35.8 AV	68.2	-32.4	1.95 V	115	36.6	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 183 : 6865 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	40.4 PK	88.2	-47.8	1.52 H	325	27.2	13.2
2	#13730.00	28.7 AV	68.2	-39.5	1.52 H	325	15.5	13.2
3	20595.00	46.0 PK	74.0	-28.0	1.64 H	8	50.9	-4.9
4	20595.00	34.7 AV	54.0	-19.3	1.64 H	8	39.6	-4.9
5	#27460.00	49.1 PK	88.2	-39.1	1.95 H	43	50.6	-1.5
6	#27460.00	37.2 AV	68.2	-31.0	1.95 H	43	38.7	-1.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	40.6 PK	88.2	-47.6	3.68 V	90	27.4	13.2
2	#13730.00	28.7 AV	68.2	-39.5	3.68 V	90	15.5	13.2
3	20595.00	44.3 PK	74.0	-29.7	2.26 V	99	49.2	-4.9
4	20595.00	31.1 AV	54.0	-22.9	2.26 V	99	36.0	-4.9
5	#27460.00	47.7 PK	88.2	-40.5	1.94 V	145	49.2	-1.5
6	#27460.00	35.8 AV	68.2	-32.4	1.94 V	145	37.3	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 199 : 6945 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	40.2 PK	88.2	-48.0	1.45 H	325	26.9	13.3
2	#13890.00	28.8 AV	68.2	-39.4	1.45 H	325	15.5	13.3
3	20835.00	47.0 PK	74.0	-27.0	1.58 H	6	51.8	-4.8
4	20835.00	35.2 AV	54.0	-18.8	1.58 H	6	40.0	-4.8
5	#27780.00	49.2 PK	88.2	-39.0	2.03 H	92	50.9	-1.7
6	#27780.00	37.7 AV	68.2	-30.5	2.03 H	92	39.4	-1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	40.1 PK	88.2	-48.1	3.63 V	75	26.8	13.3
2	#13890.00	28.5 AV	68.2	-39.7	3.63 V	75	15.2	13.3
3	20835.00	45.1 PK	74.0	-28.9	2.17 V	122	49.9	-4.8
4	20835.00	31.7 AV	54.0	-22.3	2.17 V	122	36.5	-4.8
5	#27780.00	47.5 PK	88.2	-40.7	1.93 V	100	49.2	-1.7
6	#27780.00	36.0 AV	68.2	-32.2	1.93 V	100	37.7	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 215 : 7025 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	40.7 PK	88.2	-47.5	1.50 H	329	27.1	13.6
2	#14050.00	29.0 AV	68.2	-39.2	1.50 H	329	15.4	13.6
3	21075.00	46.5 PK	74.0	-27.5	1.64 H	14	50.9	-4.4
4	21075.00	34.8 AV	54.0	-19.2	1.64 H	14	39.2	-4.4
5	#28100.00	49.0 PK	88.2	-39.2	2.02 H	79	50.7	-1.7
6	#28100.00	37.2 AV	68.2	-31.0	2.02 H	79	38.9	-1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	40.3 PK	88.2	-47.9	3.73 V	83	26.7	13.6
2	#14050.00	28.5 AV	68.2	-39.7	3.73 V	83	14.9	13.6
3	21075.00	44.6 PK	74.0	-29.4	2.14 V	114	49.0	-4.4
4	21075.00	31.7 AV	54.0	-22.3	2.14 V	114	36.1	-4.4
5	#28100.00	47.7 PK	88.2	-40.5	1.92 V	85	49.4	-1.7
6	#28100.00	36.0 AV	68.2	-32.2	1.92 V	85	37.7	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 15 : 6025 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	40.8 PK	74.0	-33.2	1.52 H	316	29.6	11.2
2	12050.00	29.2 AV	54.0	-24.8	1.52 H	316	18.0	11.2
3	18075.00	46.1 PK	74.0	-27.9	1.61 H	19	45.0	1.1
4	18075.00	34.4 AV	54.0	-19.6	1.61 H	19	33.3	1.1
5	#24100.00	48.7 PK	88.2	-39.5	2.08 H	106	51.6	-2.9
6	#24100.00	37.4 AV	68.2	-30.8	2.08 H	106	40.3	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	40.3 PK	74.0	-33.7	3.64 V	102	29.1	11.2
2	12050.00	28.6 AV	54.0	-25.4	3.64 V	102	17.4	11.2
3	18075.00	44.6 PK	74.0	-29.4	2.15 V	93	43.5	1.1
4	18075.00	31.5 AV	54.0	-22.5	2.15 V	93	30.4	1.1
5	#24100.00	47.8 PK	88.2	-40.4	1.85 V	157	50.7	-2.9
6	#24100.00	35.8 AV	68.2	-32.4	1.85 V	157	38.7	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 47 : 6185 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	41.3 PK	74.0	-32.7	1.45 H	340	30.9	10.4
2	12370.00	29.5 AV	54.0	-24.5	1.45 H	340	19.1	10.4
3	18555.00	46.3 PK	74.0	-27.7	1.63 H	5	52.9	-6.6
4	18555.00	34.5 AV	54.0	-19.5	1.63 H	5	41.1	-6.6
5	#24740.00	48.9 PK	88.2	-39.3	2.09 H	118	51.0	-2.1
6	#24740.00	37.9 AV	68.2	-30.3	2.09 H	118	40.0	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	40.6 PK	74.0	-33.4	3.73 V	99	30.2	10.4
2	12370.00	28.8 AV	54.0	-25.2	3.73 V	99	18.4	10.4
3	18555.00	45.1 PK	74.0	-28.9	2.16 V	106	51.7	-6.6
4	18555.00	32.0 AV	54.0	-22.0	2.16 V	106	38.6	-6.6
5	#24740.00	46.9 PK	88.2	-41.3	1.94 V	155	49.0	-2.1
6	#24740.00	35.3 AV	68.2	-32.9	1.94 V	155	37.4	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 79 : 6345 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	40.8 PK	74.0	-33.2	1.51 H	319	30.0	10.8
2	12690.00	29.0 AV	54.0	-25.0	1.51 H	319	18.2	10.8
3	19035.00	46.9 PK	74.0	-27.1	1.61 H	10	53.2	-6.3
4	19035.00	34.9 AV	54.0	-19.1	1.61 H	10	41.2	-6.3
5	#25380.00	48.6 PK	88.2	-39.6	2.11 H	134	50.2	-1.6
6	#25380.00	37.7 AV	68.2	-30.5	2.11 H	134	39.3	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	40.5 PK	74.0	-33.5	3.73 V	83	29.7	10.8
2	12690.00	28.8 AV	54.0	-25.2	3.73 V	83	18.0	10.8
3	19035.00	44.9 PK	74.0	-29.1	2.17 V	123	51.2	-6.3
4	19035.00	31.5 AV	54.0	-22.5	2.17 V	123	37.8	-6.3
5	#25380.00	47.6 PK	88.2	-40.6	1.99 V	167	49.2	-1.6
6	#25380.00	35.7 AV	68.2	-32.5	1.99 V	167	37.3	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 111 : 6505 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	41.2 PK	88.2	-47.0	1.49 H	324	30.2	11.0
2	#13010.00	29.2 AV	68.2	-39.0	1.49 H	324	18.2	11.0
3	19515.00	46.5 PK	74.0	-27.5	1.69 H	29	52.8	-6.3
4	19515.00	34.9 AV	54.0	-19.1	1.69 H	29	41.2	-6.3
5	#26020.00	49.0 PK	88.2	-39.2	2.07 H	100	50.0	-1.0
6	#26020.00	37.8 AV	68.2	-30.4	2.07 H	100	38.8	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	40.4 PK	88.2	-47.8	3.68 V	77	29.4	11.0
2	#13010.00	28.4 AV	68.2	-39.8	3.68 V	77	17.4	11.0
3	19515.00	45.0 PK	74.0	-29.0	2.22 V	104	51.3	-6.3
4	19515.00	31.6 AV	54.0	-22.4	2.22 V	104	37.9	-6.3
5	#26020.00	47.6 PK	88.2	-40.6	1.91 V	118	48.6	-1.0
6	#26020.00	36.2 AV	68.2	-32.0	1.91 V	118	37.2	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 143 : 6665 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	40.3 PK	74.0	-33.7	1.52 H	335	28.3	12.0
2	13330.00	28.9 AV	54.0	-25.1	1.52 H	335	16.9	12.0
3	19995.00	47.1 PK	74.0	-26.9	1.61 H	25	53.0	-5.9
4	19995.00	35.2 AV	54.0	-18.8	1.61 H	25	41.1	-5.9
5	#26660.00	48.5 PK	88.2	-39.7	2.10 H	131	48.8	-0.3
6	#26660.00	37.9 AV	68.2	-30.3	2.10 H	131	38.2	-0.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	40.0 PK	74.0	-34.0	3.66 V	88	28.0	12.0
2	13330.00	28.5 AV	54.0	-25.5	3.66 V	88	16.5	12.0
3	19995.00	44.6 PK	74.0	-29.4	2.24 V	111	50.5	-5.9
4	19995.00	31.6 AV	54.0	-22.4	2.24 V	111	37.5	-5.9
5	#26660.00	46.9 PK	88.2	-41.3	1.97 V	116	47.2	-0.3
6	#26660.00	35.6 AV	68.2	-32.6	1.97 V	116	35.9	-0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 175 : 6825 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	40.9 PK	88.2	-47.3	1.50 H	320	27.7	13.2
2	#13650.00	29.4 AV	68.2	-38.8	1.50 H	320	16.2	13.2
3	20475.00	46.5 PK	74.0	-27.5	1.64 H	3	51.8	-5.3
4	20475.00	34.6 AV	54.0	-19.4	1.64 H	3	39.9	-5.3
5	#27300.00	49.1 PK	88.2	-39.1	2.06 H	123	50.5	-1.4
6	#27300.00	37.8 AV	68.2	-30.4	2.06 H	123	39.2	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	40.4 PK	88.2	-47.8	3.62 V	78	27.2	13.2
2	#13650.00	29.0 AV	68.2	-39.2	3.62 V	78	15.8	13.2
3	20475.00	44.9 PK	74.0	-29.1	2.16 V	107	50.2	-5.3
4	20475.00	31.8 AV	54.0	-22.2	2.16 V	107	37.1	-5.3
5	#27300.00	46.7 PK	88.2	-41.5	1.94 V	121	48.1	-1.4
6	#27300.00	35.6 AV	68.2	-32.6	1.94 V	121	37.0	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 207 : 6985 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	40.7 PK	88.2	-47.5	1.54 H	334	27.3	13.4
2	#13970.00	29.3 AV	68.2	-38.9	1.54 H	334	15.9	13.4
3	20955.00	46.6 PK	74.0	-27.4	1.69 H	9	51.1	-4.5
4	20955.00	35.1 AV	54.0	-18.9	1.69 H	9	39.6	-4.5
5	#27940.00	48.9 PK	88.2	-39.3	2.11 H	114	50.5	-1.6
6	#27940.00	38.0 AV	68.2	-30.2	2.11 H	114	39.6	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	40.7 PK	88.2	-47.5	3.73 V	91	27.3	13.4
2	#13970.00	28.8 AV	68.2	-39.4	3.73 V	91	15.4	13.4
3	20955.00	45.2 PK	74.0	-28.8	2.21 V	103	49.7	-4.5
4	20955.00	31.7 AV	54.0	-22.3	2.21 V	103	36.2	-4.5
5	#27940.00	47.4 PK	88.2	-40.8	1.94 V	127	49.0	-1.6
6	#27940.00	36.0 AV	68.2	-32.2	1.94 V	127	37.6	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

**20MHz Preamble
RU26**

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 2 : 5935 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	41.4 PK	74.0	-32.6	1.50 H	332	30.0	11.4
2	11870.00	29.7 AV	54.0	-24.3	1.50 H	332	18.3	11.4
3	17805.00	45.6 PK	74.0	-28.4	1.65 H	6	25.1	20.5
4	17805.00	34.1 AV	54.0	-19.9	1.65 H	6	13.6	20.5
5	23740.00	49.6 PK	74.0	-24.4	2.05 H	51	52.9	-3.3
6	23740.00	37.9 AV	54.0	-16.1	2.05 H	51	41.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	40.5 PK	74.0	-33.5	3.67 V	80	29.1	11.4
2	11870.00	28.8 AV	54.0	-25.2	3.67 V	80	17.4	11.4
3	17805.00	43.0 PK	74.0	-31.0	2.31 V	99	22.5	20.5
4	17805.00	32.5 AV	54.0	-21.5	2.31 V	99	12.0	20.5
5	23740.00	46.4 PK	74.0	-27.6	1.98 V	141	49.7	-3.3
6	23740.00	35.8 AV	54.0	-18.2	1.98 V	141	39.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 1 : 5955 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	42.6 PK	74.0	-31.4	1.51 H	342	31.1	11.5
2	11910.00	31.1 AV	54.0	-22.9	1.51 H	342	19.6	11.5
3	17865.00	45.0 PK	74.0	-29.0	1.57 H	1	23.4	21.6
4	17865.00	33.4 AV	54.0	-20.6	1.57 H	1	11.8	21.6
5	23820.00	49.1 PK	74.0	-24.9	2.10 H	88	52.4	-3.3
6	23820.00	37.6 AV	54.0	-16.4	2.10 H	88	40.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	40.7 PK	74.0	-33.3	3.69 V	118	29.2	11.5
2	11910.00	29.2 AV	54.0	-24.8	3.69 V	118	17.7	11.5
3	17865.00	43.6 PK	74.0	-30.4	2.32 V	109	22.0	21.6
4	17865.00	32.6 AV	54.0	-21.4	2.32 V	109	11.0	21.6
5	23820.00	48.0 PK	74.0	-26.0	1.66 V	199	51.3	-3.3
6	23820.00	35.5 AV	54.0	-18.5	1.66 V	199	38.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 45 : 6175 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	41.1 PK	74.0	-32.9	1.47 H	310	30.5	10.6
2	12350.00	29.2 AV	54.0	-24.8	1.47 H	310	18.6	10.6
3	18525.00	45.0 PK	74.0	-29.0	1.65 H	10	51.6	-6.6
4	18525.00	33.4 AV	54.0	-20.6	1.65 H	10	40.0	-6.6
5	#24700.00	50.5 PK	88.2	-37.7	2.03 H	45	52.6	-2.1
6	#24700.00	38.7 AV	68.2	-29.5	2.03 H	45	40.8	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	40.5 PK	74.0	-33.5	3.90 V	82	29.9	10.6
2	12350.00	29.3 AV	54.0	-24.7	3.90 V	82	18.7	10.6
3	18525.00	44.3 PK	74.0	-29.7	2.13 V	84	50.9	-6.6
4	18525.00	31.2 AV	54.0	-22.8	2.13 V	84	37.8	-6.6
5	#24700.00	45.1 PK	88.2	-43.1	1.83 V	153	47.2	-2.1
6	#24700.00	34.8 AV	68.2	-33.4	1.83 V	153	36.9	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 93 : 6415 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	41.4 PK	88.2	-46.8	1.49 H	322	30.6	10.8
2	#12830.00	29.3 AV	68.2	-38.9	1.49 H	322	18.5	10.8
3	19245.00	46.1 PK	74.0	-27.9	1.68 H	18	52.7	-6.6
4	19245.00	34.0 AV	54.0	-20.0	1.68 H	18	40.6	-6.6
5	#25660.00	50.2 PK	88.2	-38.0	2.02 H	30	51.5	-1.3
6	#25660.00	38.7 AV	68.2	-29.5	2.02 H	30	40.0	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	40.2 PK	88.2	-48.0	3.82 V	68	29.4	10.8
2	#12830.00	29.0 AV	68.2	-39.2	3.82 V	68	18.2	10.8
3	19245.00	44.3 PK	74.0	-29.7	2.00 V	94	50.9	-6.6
4	19245.00	31.4 AV	54.0	-22.6	2.00 V	94	38.0	-6.6
5	#25660.00	45.7 PK	88.2	-42.5	1.88 V	168	47.0	-1.3
6	#25660.00	35.1 AV	68.2	-33.1	1.88 V	168	36.4	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 117 : 6535 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	42.1 PK	88.2	-46.1	1.52 H	329	31.0	11.1
2	#13070.00	29.9 AV	68.2	-38.3	1.52 H	329	18.8	11.1
3	19605.00	46.2 PK	74.0	-27.8	1.61 H	21	52.4	-6.2
4	19605.00	34.7 AV	54.0	-19.3	1.61 H	21	40.9	-6.2
5	#26140.00	48.7 PK	88.2	-39.5	1.85 H	105	49.7	-1.0
6	#26140.00	37.5 AV	68.2	-30.7	1.85 H	105	38.5	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	40.5 PK	88.2	-47.7	3.79 V	73	29.4	11.1
2	#13070.00	28.8 AV	68.2	-39.4	3.79 V	73	17.7	11.1
3	19605.00	43.4 PK	74.0	-30.6	2.32 V	135	49.6	-6.2
4	19605.00	32.6 AV	54.0	-21.4	2.32 V	135	38.8	-6.2
5	#26140.00	46.2 PK	88.2	-42.0	1.73 V	166	47.2	-1.0
6	#26140.00	34.1 AV	68.2	-34.1	1.73 V	166	35.1	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 149 : 6695 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	42.7 PK	74.0	-31.3	1.52 H	300	30.4	12.3
2	13390.00	29.9 AV	54.0	-24.1	1.52 H	300	17.6	12.3
3	20085.00	46.0 PK	74.0	-28.0	1.62 H	38	51.7	-5.7
4	20085.00	34.4 AV	54.0	-19.6	1.62 H	38	40.1	-5.7
5	#26780.00	48.3 PK	88.2	-39.9	1.87 H	115	48.9	-0.6
6	#26780.00	36.8 AV	68.2	-31.4	1.87 H	115	37.4	-0.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	40.7 PK	74.0	-33.3	3.85 V	103	28.4	12.3
2	13390.00	29.1 AV	54.0	-24.9	3.85 V	103	16.8	12.3
3	20085.00	44.7 PK	74.0	-29.3	2.05 V	101	50.4	-5.7
4	20085.00	31.4 AV	54.0	-22.6	2.05 V	101	37.1	-5.7
5	#26780.00	45.9 PK	88.2	-42.3	1.91 V	139	46.5	-0.6
6	#26780.00	35.3 AV	68.2	-32.9	1.91 V	139	35.9	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 181 : 6855 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	42.3 PK	88.2	-45.9	1.56 H	305	29.2	13.1
2	#13710.00	30.7 AV	68.2	-37.5	1.56 H	305	17.6	13.1
3	20565.00	46.3 PK	74.0	-27.7	1.67 H	27	51.4	-5.1
4	20565.00	34.5 AV	54.0	-19.5	1.67 H	27	39.6	-5.1
5	#27420.00	49.2 PK	88.2	-39.0	1.95 H	73	50.7	-1.5
6	#27420.00	37.9 AV	68.2	-30.3	1.95 H	73	39.4	-1.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	40.7 PK	88.2	-47.5	3.91 V	74	27.6	13.1
2	#13710.00	29.0 AV	68.2	-39.2	3.91 V	74	15.9	13.1
3	20565.00	44.1 PK	74.0	-29.9	2.05 V	83	49.2	-5.1
4	20565.00	31.0 AV	54.0	-23.0	2.05 V	83	36.1	-5.1
5	#27420.00	46.1 PK	88.2	-42.1	1.90 V	176	47.6	-1.5
6	#27420.00	35.5 AV	68.2	-32.7	1.90 V	176	37.0	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RU52

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 2 : 5935 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	41.7 PK	74.0	-32.3	1.53 H	349	30.3	11.4
2	11870.00	30.2 AV	54.0	-23.8	1.53 H	349	18.8	11.4
3	17805.00	46.6 PK	74.0	-27.4	1.69 H	13	26.1	20.5
4	17805.00	34.5 AV	54.0	-19.5	1.69 H	13	14.0	20.5
5	23740.00	49.1 PK	74.0	-24.9	1.93 H	73	52.4	-3.3
6	23740.00	38.0 AV	54.0	-16.0	1.93 H	73	41.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	40.8 PK	74.0	-33.2	3.83 V	70	29.4	11.4
2	11870.00	28.8 AV	54.0	-25.2	3.83 V	70	17.4	11.4
3	17805.00	43.5 PK	74.0	-30.5	2.24 V	123	23.0	20.5
4	17805.00	32.4 AV	54.0	-21.6	2.24 V	123	11.9	20.5
5	23740.00	46.4 PK	74.0	-27.6	1.79 V	175	49.7	-3.3
6	23740.00	34.7 AV	54.0	-19.3	1.79 V	175	38.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 1 : 5955 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	42.2 PK	74.0	-31.8	1.47 H	316	30.7	11.5
2	11910.00	30.1 AV	54.0	-23.9	1.47 H	316	18.6	11.5
3	17865.00	46.4 PK	74.0	-27.6	1.71 H	59	24.8	21.6
4	17865.00	34.3 AV	54.0	-19.7	1.71 H	59	12.7	21.6
5	23820.00	50.7 PK	74.0	-23.3	1.98 H	57	54.0	-3.3
6	23820.00	39.1 AV	54.0	-14.9	1.98 H	57	42.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	41.5 PK	74.0	-32.5	3.95 V	59	30.0	11.5
2	11910.00	30.2 AV	54.0	-23.8	3.95 V	59	18.7	11.5
3	17865.00	44.5 PK	74.0	-29.5	2.19 V	98	22.9	21.6
4	17865.00	32.0 AV	54.0	-22.0	2.19 V	98	10.4	21.6
5	23820.00	46.2 PK	74.0	-27.8	1.91 V	168	49.5	-3.3
6	23820.00	35.1 AV	54.0	-18.9	1.91 V	168	38.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 45 : 6175 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	42.0 PK	74.0	-32.0	1.54 H	307	31.4	10.6
2	12350.00	29.3 AV	54.0	-24.7	1.54 H	307	18.7	10.6
3	18525.00	45.8 PK	74.0	-28.2	1.68 H	31	52.4	-6.6
4	18525.00	34.0 AV	54.0	-20.0	1.68 H	31	40.6	-6.6
5	#24700.00	49.0 PK	88.2	-39.2	1.90 H	94	51.1	-2.1
6	#24700.00	37.3 AV	68.2	-30.9	1.90 H	94	39.4	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	40.1 PK	74.0	-33.9	3.85 V	68	29.5	10.6
2	12350.00	28.4 AV	54.0	-25.6	3.85 V	68	17.8	10.6
3	18525.00	43.9 PK	74.0	-30.1	2.28 V	149	50.5	-6.6
4	18525.00	32.7 AV	54.0	-21.3	2.28 V	149	39.3	-6.6
5	#24700.00	46.4 PK	88.2	-41.8	1.79 V	163	48.5	-2.1
6	#24700.00	34.5 AV	68.2	-33.7	1.79 V	163	36.6	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 93 : 6415 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	42.0 PK	88.2	-46.2	1.52 H	350	31.2	10.8
2	#12830.00	30.3 AV	68.2	-37.9	1.52 H	350	19.5	10.8
3	19245.00	45.2 PK	74.0	-28.8	1.61 H	12	51.8	-6.6
4	19245.00	33.7 AV	54.0	-20.3	1.61 H	12	40.3	-6.6
5	#25660.00	49.3 PK	88.2	-38.9	1.88 H	82	50.6	-1.3
6	#25660.00	37.6 AV	68.2	-30.6	1.88 H	82	38.9	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	41.1 PK	88.2	-47.1	3.88 V	85	30.3	10.8
2	#12830.00	29.4 AV	68.2	-38.8	3.88 V	85	18.6	10.8
3	19245.00	44.5 PK	74.0	-29.5	2.15 V	82	51.1	-6.6
4	19245.00	31.3 AV	54.0	-22.7	2.15 V	82	37.9	-6.6
5	#25660.00	45.7 PK	88.2	-42.5	1.90 V	185	47.0	-1.3
6	#25660.00	34.9 AV	68.2	-33.3	1.90 V	185	36.2	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 117 : 6535 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	41.7 PK	88.2	-46.5	1.41 H	335	30.6	11.1
2	#13070.00	29.8 AV	68.2	-38.4	1.41 H	335	18.7	11.1
3	19605.00	48.3 PK	74.0	-25.7	1.74 H	38	54.5	-6.2
4	19605.00	36.0 AV	54.0	-18.0	1.74 H	38	42.2	-6.2
5	#26140.00	50.4 PK	88.2	-37.8	1.84 H	56	51.4	-1.0
6	#26140.00	38.6 AV	68.2	-29.6	1.84 H	56	39.6	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	41.1 PK	88.2	-47.1	3.83 V	78	30.0	11.1
2	#13070.00	29.3 AV	68.2	-38.9	3.83 V	78	18.2	11.1
3	19605.00	45.3 PK	74.0	-28.7	2.26 V	100	51.5	-6.2
4	19605.00	32.5 AV	54.0	-21.5	2.26 V	100	38.7	-6.2
5	#26140.00	46.6 PK	88.2	-41.6	1.86 V	154	47.6	-1.0
6	#26140.00	35.8 AV	68.2	-32.4	1.86 V	154	36.8	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 149 : 6695 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	42.4 PK	74.0	-31.6	1.58 H	305	30.1	12.3
2	13390.00	29.6 AV	54.0	-24.4	1.58 H	305	17.3	12.3
3	20085.00	46.1 PK	74.0	-27.9	1.65 H	70	51.8	-5.7
4	20085.00	33.7 AV	54.0	-20.3	1.65 H	70	39.4	-5.7
5	#26780.00	50.2 PK	88.2	-38.0	1.93 H	119	50.8	-0.6
6	#26780.00	38.2 AV	68.2	-30.0	1.93 H	119	38.8	-0.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	40.3 PK	74.0	-33.7	3.85 V	73	28.0	12.3
2	13390.00	28.7 AV	54.0	-25.3	3.85 V	73	16.4	12.3
3	20085.00	44.4 PK	74.0	-29.6	2.21 V	142	50.1	-5.7
4	20085.00	33.0 AV	54.0	-21.0	2.21 V	142	38.7	-5.7
5	#26780.00	46.7 PK	88.2	-41.5	1.76 V	134	47.3	-0.6
6	#26780.00	35.0 AV	68.2	-33.2	1.76 V	134	35.6	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 181 : 6855 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	42.4 PK	88.2	-45.8	1.53 H	348	29.3	13.1
2	#13710.00	30.6 AV	68.2	-37.6	1.53 H	348	17.5	13.1
3	20565.00	48.4 PK	74.0	-25.6	1.78 H	59	53.5	-5.1
4	20565.00	36.4 AV	54.0	-17.6	1.78 H	59	41.5	-5.1
5	#27420.00	49.7 PK	88.2	-38.5	1.97 H	63	51.2	-1.5
6	#27420.00	38.0 AV	68.2	-30.2	1.97 H	63	39.5	-1.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	41.4 PK	88.2	-46.8	3.82 V	89	28.3	13.1
2	#13710.00	29.8 AV	68.2	-38.4	3.82 V	89	16.7	13.1
3	20565.00	44.4 PK	74.0	-29.6	2.23 V	165	49.5	-5.1
4	20565.00	32.4 AV	54.0	-21.6	2.23 V	165	37.5	-5.1
5	#27420.00	46.5 PK	88.2	-41.7	1.84 V	156	48.0	-1.5
6	#27420.00	34.1 AV	68.2	-34.1	1.84 V	156	35.6	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RU106

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 2 : 5935 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	42.6 PK	74.0	-31.4	1.38 H	346	31.2	11.4
2	11870.00	30.8 AV	54.0	-23.2	1.38 H	346	19.4	11.4
3	17805.00	47.5 PK	74.0	-26.5	1.67 H	38	27.0	20.5
4	17805.00	35.3 AV	54.0	-18.7	1.67 H	38	14.8	20.5
5	23740.00	50.3 PK	74.0	-23.7	1.86 H	57	53.6	-3.3
6	23740.00	38.1 AV	54.0	-15.9	1.86 H	57	41.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	42.3 PK	74.0	-31.7	3.96 V	84	30.9	11.4
2	11870.00	30.6 AV	54.0	-23.4	3.96 V	84	19.2	11.4
3	17805.00	44.6 PK	74.0	-29.4	2.22 V	97	24.1	20.5
4	17805.00	32.0 AV	54.0	-22.0	2.22 V	97	11.5	20.5
5	23740.00	46.4 PK	74.0	-27.6	2.01 V	145	49.7	-3.3
6	23740.00	35.8 AV	54.0	-18.2	2.01 V	145	39.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 1 : 5955 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	40.6 PK	74.0	-33.4	1.43 H	313	29.1	11.5
2	11910.00	29.2 AV	54.0	-24.8	1.43 H	313	17.7	11.5
3	17865.00	45.1 PK	74.0	-28.9	1.74 H	8	23.5	21.6
4	17865.00	33.6 AV	54.0	-20.4	1.74 H	8	12.0	21.6
5	23820.00	49.2 PK	74.0	-24.8	1.95 H	42	52.5	-3.3
6	23820.00	37.6 AV	54.0	-16.4	1.95 H	42	40.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	42.9 PK	74.0	-31.1	3.95 V	71	31.4	11.5
2	11910.00	30.8 AV	54.0	-23.2	3.95 V	71	19.3	11.5
3	17865.00	45.4 PK	74.0	-28.6	2.21 V	107	23.8	21.6
4	17865.00	32.2 AV	54.0	-21.8	2.21 V	107	10.6	21.6
5	23820.00	46.8 PK	74.0	-27.2	1.99 V	136	50.1	-3.3
6	23820.00	35.7 AV	54.0	-18.3	1.99 V	136	39.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 45 : 6175 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	42.6 PK	74.0	-31.4	1.42 H	345	32.0	10.6
2	12350.00	30.6 AV	54.0	-23.4	1.42 H	345	20.0	10.6
3	18525.00	47.6 PK	74.0	-26.4	1.72 H	31	54.2	-6.6
4	18525.00	35.6 AV	54.0	-18.4	1.72 H	31	42.2	-6.6
5	#24700.00	49.2 PK	88.2	-39.0	1.89 H	74	51.3	-2.1
6	#24700.00	37.5 AV	68.2	-30.7	1.89 H	74	39.6	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	40.1 PK	74.0	-33.9	3.93 V	73	29.5	10.6
2	12350.00	29.1 AV	54.0	-24.9	3.93 V	73	18.5	10.6
3	18525.00	44.9 PK	74.0	-29.1	2.34 V	78	51.5	-6.6
4	18525.00	32.1 AV	54.0	-21.9	2.34 V	78	38.7	-6.6
5	#24700.00	46.0 PK	88.2	-42.2	1.95 V	161	48.1	-2.1
6	#24700.00	35.4 AV	68.2	-32.8	1.95 V	161	37.5	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 93 : 6415 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	41.5 PK	88.2	-46.7	1.54 H	323	30.7	10.8
2	#12830.00	30.0 AV	68.2	-38.2	1.54 H	323	19.2	10.8
3	19245.00	48.1 PK	74.0	-25.9	1.59 H	8	54.7	-6.6
4	19245.00	35.9 AV	54.0	-18.1	1.59 H	8	42.5	-6.6
5	#25660.00	48.5 PK	88.2	-39.7	1.92 H	95	49.8	-1.3
6	#25660.00	37.9 AV	68.2	-30.3	1.92 H	95	39.2	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	40.2 PK	88.2	-48.0	3.86 V	85	29.4	10.8
2	#12830.00	29.0 AV	68.2	-39.2	3.86 V	85	18.2	10.8
3	19245.00	44.0 PK	74.0	-30.0	2.31 V	80	50.6	-6.6
4	19245.00	31.5 AV	54.0	-22.5	2.31 V	80	38.1	-6.6
5	#25660.00	45.4 PK	88.2	-42.8	1.84 V	163	46.7	-1.3
6	#25660.00	34.4 AV	68.2	-33.8	1.84 V	163	35.7	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 117 : 6535 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	41.5 PK	88.2	-46.7	1.52 H	358	30.4	11.1
2	#13070.00	30.5 AV	68.2	-37.7	1.52 H	358	19.4	11.1
3	19605.00	46.1 PK	74.0	-27.9	1.53 H	23	52.3	-6.2
4	19605.00	34.4 AV	54.0	-19.6	1.53 H	23	40.6	-6.2
5	#26140.00	49.7 PK	88.2	-38.5	2.07 H	72	50.7	-1.0
6	#26140.00	38.6 AV	68.2	-29.6	2.07 H	72	39.6	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	40.7 PK	88.2	-47.5	3.89 V	61	29.6	11.1
2	#13070.00	29.2 AV	68.2	-39.0	3.89 V	61	18.1	11.1
3	19605.00	44.8 PK	74.0	-29.2	2.28 V	52	51.0	-6.2
4	19605.00	32.2 AV	54.0	-21.8	2.28 V	52	38.4	-6.2
5	#26140.00	45.6 PK	88.2	-42.6	1.84 V	156	46.6	-1.0
6	#26140.00	34.9 AV	68.2	-33.3	1.84 V	156	35.9	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 149 : 6695 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	40.7 PK	74.0	-33.3	1.51 H	326	28.4	12.3
2	13390.00	29.5 AV	54.0	-24.5	1.51 H	326	17.2	12.3
3	20085.00	48.6 PK	74.0	-25.4	1.62 H	15	54.3	-5.7
4	20085.00	36.3 AV	54.0	-17.7	1.62 H	15	42.0	-5.7
5	#26780.00	48.5 PK	88.2	-39.7	1.95 H	99	49.1	-0.6
6	#26780.00	37.2 AV	68.2	-31.0	1.95 H	99	37.8	-0.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	40.3 PK	74.0	-33.7	3.92 V	57	28.0	12.3
2	13390.00	29.0 AV	54.0	-25.0	3.92 V	57	16.7	12.3
3	20085.00	43.5 PK	74.0	-30.5	2.32 V	98	49.2	-5.7
4	20085.00	31.0 AV	54.0	-23.0	2.32 V	98	36.7	-5.7
5	#26780.00	45.9 PK	88.2	-42.3	1.89 V	165	46.5	-0.6
6	#26780.00	35.3 AV	68.2	-32.9	1.89 V	165	35.9	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 181 : 6855 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	40.1 PK	88.2	-48.1	1.46 H	309	27.0	13.1
2	#13710.00	28.5 AV	68.2	-39.7	1.46 H	309	15.4	13.1
3	20565.00	45.1 PK	74.0	-28.9	1.68 H	6	50.2	-5.1
4	20565.00	33.6 AV	54.0	-20.4	1.68 H	6	38.7	-5.1
5	#27420.00	48.9 PK	88.2	-39.3	1.95 H	34	50.4	-1.5
6	#27420.00	37.2 AV	68.2	-31.0	1.95 H	34	38.7	-1.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	40.0 PK	88.2	-48.2	3.82 V	47	26.9	13.1
2	#13710.00	29.1 AV	68.2	-39.1	3.82 V	47	16.0	13.1
3	20565.00	44.4 PK	74.0	-29.6	2.34 V	50	49.5	-5.1
4	20565.00	32.2 AV	54.0	-21.8	2.34 V	50	37.3	-5.1
5	#27420.00	45.1 PK	88.2	-43.1	1.91 V	147	46.6	-1.5
6	#27420.00	34.1 AV	68.2	-34.1	1.91 V	147	35.6	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RU242

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 2 : 5935 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	42.9 PK	74.0	-31.1	1.58 H	323	31.4	11.5
2	11930.00	30.2 AV	54.0	-23.8	1.58 H	323	18.7	11.5
3	17895.00	45.4 PK	74.0	-28.6	1.62 H	32	23.3	22.1
4	17895.00	34.0 AV	54.0	-20.0	1.62 H	32	11.9	22.1
5	23860.00	49.3 PK	74.0	-24.7	1.91 H	93	52.6	-3.3
6	23860.00	37.5 AV	54.0	-16.5	1.91 H	93	40.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	40.0 PK	74.0	-34.0	3.69 V	87	28.5	11.5
2	11930.00	28.6 AV	54.0	-25.4	3.69 V	87	17.1	11.5
3	17895.00	44.0 PK	74.0	-30.0	2.32 V	97	21.9	22.1
4	17895.00	33.0 AV	54.0	-21.0	2.32 V	97	10.9	22.1
5	23860.00	46.7 PK	74.0	-27.3	1.78 V	184	50.0	-3.3
6	23860.00	34.5 AV	54.0	-19.5	1.78 V	184	37.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 1 : 5955 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	42.2 PK	74.0	-31.8	1.55 H	284	31.5	10.7
2	12330.00	29.8 AV	54.0	-24.2	1.55 H	284	19.1	10.7
3	18495.00	44.5 PK	74.0	-29.5	1.60 H	10	51.1	-6.6
4	18495.00	32.8 AV	54.0	-21.2	1.60 H	10	39.4	-6.6
5	#24660.00	47.8 PK	88.2	-40.4	2.00 H	110	49.9	-2.1
6	#24660.00	36.4 AV	68.2	-31.8	2.00 H	110	38.5	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	40.1 PK	74.0	-33.9	3.66 V	76	29.4	10.7
2	12330.00	28.2 AV	54.0	-25.8	3.66 V	76	17.5	10.7
3	18495.00	43.3 PK	74.0	-30.7	2.24 V	112	49.9	-6.6
4	18495.00	32.1 AV	54.0	-21.9	2.24 V	112	38.7	-6.6
5	#24660.00	47.4 PK	88.2	-40.8	1.76 V	180	49.5	-2.1
6	#24660.00	35.5 AV	68.2	-32.7	1.76 V	180	37.6	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 45 : 6175 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	42.8 PK	88.2	-45.4	1.50 H	327	32.0	10.8
2	#12810.00	30.5 AV	68.2	-37.7	1.50 H	327	19.7	10.8
3	19215.00	45.7 PK	74.0	-28.3	1.59 H	12	52.2	-6.5
4	19215.00	34.2 AV	54.0	-19.8	1.59 H	12	40.7	-6.5
5	#25620.00	48.9 PK	88.2	-39.3	1.90 H	87	50.2	-1.3
6	#25620.00	37.3 AV	68.2	-30.9	1.90 H	87	38.6	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	40.6 PK	88.2	-47.6	3.77 V	80	29.8	10.8
2	#12810.00	29.0 AV	68.2	-39.2	3.77 V	80	18.2	10.8
3	19215.00	43.5 PK	74.0	-30.5	2.32 V	134	50.0	-6.5
4	19215.00	32.1 AV	54.0	-21.9	2.32 V	134	38.6	-6.5
5	#25620.00	47.0 PK	88.2	-41.2	1.74 V	173	48.3	-1.3
6	#25620.00	34.8 AV	68.2	-33.4	1.74 V	173	36.1	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 93 : 6415 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	41.4 PK	88.2	-46.8	1.65 H	292	30.0	11.4
2	#13130.00	29.6 AV	68.2	-38.6	1.65 H	292	18.2	11.4
3	19695.00	46.8 PK	74.0	-27.2	1.79 H	9	53.0	-6.2
4	19695.00	35.0 AV	54.0	-19.0	1.79 H	9	41.2	-6.2
5	#26260.00	49.1 PK	88.2	-39.1	2.12 H	55	50.1	-1.0
6	#26260.00	37.6 AV	68.2	-30.6	2.12 H	55	38.6	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	40.6 PK	88.2	-47.6	3.75 V	87	29.2	11.4
2	#13130.00	28.5 AV	68.2	-39.7	3.75 V	87	17.1	11.4
3	19695.00	44.0 PK	74.0	-30.0	2.24 V	113	50.2	-6.2
4	19695.00	32.9 AV	54.0	-21.1	2.24 V	113	39.1	-6.2
5	#26260.00	47.0 PK	88.2	-41.2	1.79 V	179	48.0	-1.0
6	#26260.00	34.6 AV	68.2	-33.6	1.79 V	179	35.6	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 117 : 6535 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	42.3 PK	88.2	-45.9	1.47 H	284	29.7	12.6
2	#13450.00	31.2 AV	68.2	-37.0	1.47 H	284	18.6	12.6
3	20175.00	44.5 PK	74.0	-29.5	1.59 H	27	49.9	-5.4
4	20175.00	33.0 AV	54.0	-21.0	1.59 H	27	38.4	-5.4
5	#26900.00	47.1 PK	88.2	-41.1	1.91 H	63	48.1	-1.0
6	#26900.00	34.8 AV	68.2	-33.4	1.91 H	63	35.8	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	39.3 PK	88.2	-48.9	3.56 V	70	26.7	12.6
2	#13450.00	27.8 AV	68.2	-40.4	3.56 V	70	15.2	12.6
3	20175.00	42.2 PK	74.0	-31.8	2.24 V	116	47.6	-5.4
4	20175.00	30.6 AV	54.0	-23.4	2.24 V	116	36.0	-5.4
5	#26900.00	48.2 PK	88.2	-40.0	1.84 V	147	49.2	-1.0
6	#26900.00	35.6 AV	68.2	-32.6	1.84 V	147	36.6	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 149 : 6695 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	42.8 PK	88.2	-45.4	1.50 H	297	29.6	13.2
2	#13690.00	31.1 AV	68.2	-37.1	1.50 H	297	17.9	13.2
3	20535.00	43.9 PK	74.0	-30.1	1.43 H	33	49.1	-5.2
4	20535.00	32.8 AV	54.0	-21.2	1.43 H	33	38.0	-5.2
5	#27380.00	46.7 PK	88.2	-41.5	1.86 H	92	48.1	-1.4
6	#27380.00	36.8 AV	68.2	-31.4	1.86 H	92	38.2	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	40.9 PK	88.2	-47.3	3.65 V	93	27.7	13.2
2	#13690.00	29.2 AV	68.2	-39.0	3.65 V	93	16.0	13.2
3	20535.00	43.8 PK	74.0	-30.2	2.35 V	144	49.0	-5.2
4	20535.00	32.6 AV	54.0	-21.4	2.35 V	144	37.8	-5.2
5	#27380.00	47.8 PK	88.2	-40.4	1.82 V	157	49.2	-1.4
6	#27380.00	35.1 AV	68.2	-33.1	1.82 V	157	36.5	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

40MHz Preamble

RU26

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 3 : 5965 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	42.4 PK	74.0	-31.6	1.41 H	340	30.9	11.5
2	11930.00	30.6 AV	54.0	-23.4	1.41 H	340	19.1	11.5
3	17895.00	45.2 PK	74.0	-28.8	1.60 H	2	23.1	22.1
4	17895.00	33.3 AV	54.0	-20.7	1.60 H	2	11.2	22.1
5	23860.00	48.7 PK	74.0	-25.3	1.94 H	56	52.0	-3.3
6	23860.00	37.5 AV	54.0	-16.5	1.94 H	56	40.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	40.9 PK	74.0	-33.1	3.73 V	92	29.4	11.5
2	11930.00	29.4 AV	54.0	-24.6	3.73 V	92	17.9	11.5
3	17895.00	45.7 PK	74.0	-28.3	2.11 V	111	23.6	22.1
4	17895.00	32.5 AV	54.0	-21.5	2.11 V	111	10.4	22.1
5	23860.00	46.1 PK	74.0	-27.9	2.01 V	134	49.4	-3.3
6	23860.00	35.4 AV	54.0	-18.6	2.01 V	134	38.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 43 : 6165 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	41.2 PK	74.0	-32.8	1.61 H	320	30.5	10.7
2	12330.00	29.4 AV	54.0	-24.6	1.61 H	320	18.7	10.7
3	18495.00	45.9 PK	74.0	-28.1	1.61 H	26	52.5	-6.6
4	18495.00	34.4 AV	54.0	-19.6	1.61 H	26	41.0	-6.6
5	#24660.00	49.4 PK	88.2	-38.8	1.97 H	59	51.5	-2.1
6	#24660.00	37.5 AV	68.2	-30.7	1.97 H	59	39.6	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	38.9 PK	74.0	-35.1	3.64 V	97	28.2	10.7
2	12330.00	27.6 AV	54.0	-26.4	3.64 V	97	16.9	10.7
3	18495.00	42.7 PK	74.0	-31.3	2.27 V	102	49.3	-6.6
4	18495.00	32.4 AV	54.0	-21.6	2.27 V	102	39.0	-6.6
5	#24660.00	47.1 PK	88.2	-41.1	1.87 V	162	49.2	-2.1
6	#24660.00	36.5 AV	68.2	-31.7	1.87 V	162	38.6	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 91 : 6405 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	41.8 PK	88.2	-46.4	1.32 H	327	31.0	10.8
2	#12810.00	30.3 AV	68.2	-37.9	1.32 H	327	19.5	10.8
3	19215.00	46.0 PK	74.0	-28.0	1.57 H	11	52.5	-6.5
4	19215.00	34.4 AV	54.0	-19.6	1.57 H	11	40.9	-6.5
5	#25620.00	48.4 PK	88.2	-39.8	2.11 H	43	49.7	-1.3
6	#25620.00	37.2 AV	68.2	-31.0	2.11 H	43	38.5	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	39.9 PK	88.2	-48.3	3.72 V	59	29.1	10.8
2	#12810.00	29.2 AV	68.2	-39.0	3.72 V	59	18.4	10.8
3	19215.00	43.8 PK	74.0	-30.2	2.11 V	129	50.3	-6.5
4	19215.00	31.1 AV	54.0	-22.9	2.11 V	129	37.6	-6.5
5	#25620.00	46.4 PK	88.2	-41.8	1.98 V	134	47.7	-1.3
6	#25620.00	36.1 AV	68.2	-32.1	1.98 V	134	37.4	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 123 : 6565 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	41.6 PK	88.2	-46.6	1.48 H	300	30.2	11.4
2	#13130.00	29.8 AV	68.2	-38.4	1.48 H	300	18.4	11.4
3	19695.00	44.4 PK	74.0	-29.6	1.62 H	0	50.6	-6.2
4	19695.00	32.5 AV	54.0	-21.5	1.62 H	0	38.7	-6.2
5	#26260.00	48.7 PK	88.2	-39.5	2.05 H	75	49.7	-1.0
6	#26260.00	36.6 AV	68.2	-31.6	2.05 H	75	37.6	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	40.8 PK	88.2	-47.4	3.79 V	92	29.4	11.4
2	#13130.00	29.3 AV	68.2	-38.9	3.79 V	92	17.9	11.4
3	19695.00	45.0 PK	74.0	-29.0	2.24 V	103	51.2	-6.2
4	19695.00	31.8 AV	54.0	-22.2	2.24 V	103	38.0	-6.2
5	#26260.00	46.6 PK	88.2	-41.6	1.87 V	140	47.6	-1.0
6	#26260.00	36.2 AV	68.2	-32.0	1.87 V	140	37.2	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 155 : 6725 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	42.4 PK	88.2	-45.8	1.60 H	304	29.8	12.6
2	#13450.00	30.1 AV	68.2	-38.1	1.60 H	304	17.5	12.6
3	20175.00	45.0 PK	74.0	-29.0	1.62 H	15	50.4	-5.4
4	20175.00	33.3 AV	54.0	-20.7	1.62 H	15	38.7	-5.4
5	#26900.00	48.9 PK	88.2	-39.3	1.99 H	74	49.9	-1.0
6	#26900.00	37.4 AV	68.2	-30.8	1.99 H	74	38.4	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	40.8 PK	88.2	-47.4	3.68 V	86	28.2	12.6
2	#13450.00	29.3 AV	68.2	-38.9	3.68 V	86	16.7	12.6
3	20175.00	43.1 PK	74.0	-30.9	2.33 V	132	48.5	-5.4
4	20175.00	32.3 AV	54.0	-21.7	2.33 V	132	37.7	-5.4
5	#26900.00	47.2 PK	88.2	-41.0	1.85 V	153	48.2	-1.0
6	#26900.00	36.6 AV	68.2	-31.6	1.85 V	153	37.6	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 179 : 6845 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	42.3 PK	88.2	-45.9	1.43 H	290	29.1	13.2
2	#13690.00	30.8 AV	68.2	-37.4	1.43 H	290	17.6	13.2
3	20535.00	45.7 PK	74.0	-28.3	1.56 H	28	50.9	-5.2
4	20535.00	33.7 AV	54.0	-20.3	1.56 H	28	38.9	-5.2
5	#27380.00	49.0 PK	88.2	-39.2	1.87 H	75	50.4	-1.4
6	#27380.00	36.9 AV	68.2	-31.3	1.87 H	75	38.3	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	39.9 PK	88.2	-48.3	3.65 V	103	26.7	13.2
2	#13690.00	28.2 AV	68.2	-40.0	3.65 V	103	15.0	13.2
3	20535.00	43.6 PK	74.0	-30.4	2.19 V	101	48.8	-5.2
4	20535.00	32.2 AV	54.0	-21.8	2.19 V	101	37.4	-5.2
5	#27380.00	46.7 PK	88.2	-41.5	1.88 V	146	48.1	-1.4
6	#27380.00	35.9 AV	68.2	-32.3	1.88 V	146	37.3	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RU52

RF Mode	TX 40MHz Preamble 802.11ax (RU52)	Channel	CH 3 : 5965 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	41.6 PK	74.0	-32.4	1.61 H	302	30.1	11.5
2	11930.00	29.5 AV	54.0	-24.5	1.61 H	302	18.0	11.5
3	17895.00	45.3 PK	74.0	-28.7	1.58 H	22	23.2	22.1
4	17895.00	33.3 AV	54.0	-20.7	1.58 H	22	11.2	22.1
5	23860.00	47.7 PK	74.0	-26.3	2.02 H	101	51.0	-3.3
6	23860.00	36.2 AV	54.0	-17.8	2.02 H	101	39.5	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	40.7 PK	74.0	-33.3	3.70 V	79	29.2	11.5
2	11930.00	29.5 AV	54.0	-24.5	3.70 V	79	18.0	11.5
3	17895.00	45.1 PK	74.0	-28.9	2.13 V	95	23.0	22.1
4	17895.00	31.9 AV	54.0	-22.1	2.13 V	95	9.8	22.1
5	23860.00	46.7 PK	74.0	-27.3	1.98 V	135	50.0	-3.3
6	23860.00	36.4 AV	54.0	-17.6	1.98 V	135	39.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU52)	Channel	CH 43 : 6165 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	41.6 PK	74.0	-32.4	1.44 H	302	30.9	10.7
2	12330.00	30.5 AV	54.0	-23.5	1.44 H	302	19.8	10.7
3	18495.00	45.6 PK	74.0	-28.4	1.50 H	18	52.2	-6.6
4	18495.00	33.9 AV	54.0	-20.1	1.50 H	18	40.5	-6.6
5	#24660.00	47.5 PK	88.2	-40.7	1.80 H	83	49.6	-2.1
6	#24660.00	36.0 AV	68.2	-32.2	1.80 H	83	38.1	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	40.4 PK	74.0	-33.6	3.69 V	76	29.7	10.7
2	12330.00	28.5 AV	54.0	-25.5	3.69 V	76	17.8	10.7
3	18495.00	44.4 PK	74.0	-29.6	2.33 V	121	51.0	-6.6
4	18495.00	33.0 AV	54.0	-21.0	2.33 V	121	39.6	-6.6
5	#24660.00	48.1 PK	88.2	-40.1	1.85 V	177	50.2	-2.1
6	#24660.00	36.3 AV	68.2	-31.9	1.85 V	177	38.4	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU52)	Channel	CH 91 : 6405 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	42.3 PK	88.2	-45.9	1.51 H	350	31.5	10.8
2	#12810.00	30.0 AV	68.2	-38.2	1.51 H	350	19.2	10.8
3	19215.00	44.5 PK	74.0	-29.5	1.63 H	25	51.0	-6.5
4	19215.00	33.2 AV	54.0	-20.8	1.63 H	25	39.7	-6.5
5	#25620.00	49.6 PK	88.2	-38.6	1.93 H	63	50.9	-1.3
6	#25620.00	37.5 AV	68.2	-30.7	1.93 H	63	38.8	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	40.7 PK	88.2	-47.5	3.75 V	79	29.9	10.8
2	#12810.00	28.9 AV	68.2	-39.3	3.75 V	79	18.1	10.8
3	19215.00	43.6 PK	74.0	-30.4	2.34 V	121	50.1	-6.5
4	19215.00	32.3 AV	54.0	-21.7	2.34 V	121	38.8	-6.5
5	#25620.00	48.4 PK	88.2	-39.8	1.82 V	170	49.7	-1.3
6	#25620.00	36.2 AV	68.2	-32.0	1.82 V	170	37.5	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU52)	Channel	CH 123 : 6565 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	41.7 PK	88.2	-46.5	1.61 H	325	30.3	11.4
2	#13130.00	29.5 AV	68.2	-38.7	1.61 H	325	18.1	11.4
3	19695.00	44.7 PK	74.0	-29.3	1.61 H	8	50.9	-6.2
4	19695.00	33.5 AV	54.0	-20.5	1.61 H	8	39.7	-6.2
5	#26260.00	49.6 PK	88.2	-38.6	1.92 H	51	50.6	-1.0
6	#26260.00	38.1 AV	68.2	-30.1	1.92 H	51	39.1	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	40.9 PK	88.2	-47.3	3.61 V	92	29.5	11.4
2	#13130.00	29.2 AV	68.2	-39.0	3.61 V	92	17.8	11.4
3	19695.00	43.3 PK	74.0	-30.7	2.19 V	106	49.5	-6.2
4	19695.00	32.0 AV	54.0	-22.0	2.19 V	106	38.2	-6.2
5	#26260.00	47.6 PK	88.2	-40.6	1.76 V	163	48.6	-1.0
6	#26260.00	35.6 AV	68.2	-32.6	1.76 V	163	36.6	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU52)	Channel	CH 155 : 6725 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	41.8 PK	88.2	-46.4	1.65 H	297	29.2	12.6
2	#13450.00	29.8 AV	68.2	-38.4	1.65 H	297	17.2	12.6
3	20175.00	46.4 PK	74.0	-27.6	1.63 H	22	51.8	-5.4
4	20175.00	34.5 AV	54.0	-19.5	1.63 H	22	39.9	-5.4
5	#26900.00	49.0 PK	88.2	-39.2	1.99 H	87	50.0	-1.0
6	#26900.00	37.2 AV	68.2	-31.0	1.99 H	87	38.2	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	40.4 PK	88.2	-47.8	3.64 V	80	27.8	12.6
2	#13450.00	28.5 AV	68.2	-39.7	3.64 V	80	15.9	12.6
3	20175.00	42.9 PK	74.0	-31.1	2.23 V	120	48.3	-5.4
4	20175.00	31.6 AV	54.0	-22.4	2.23 V	120	37.0	-5.4
5	#26900.00	47.1 PK	88.2	-41.1	1.76 V	161	48.1	-1.0
6	#26900.00	34.8 AV	68.2	-33.4	1.76 V	161	35.8	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU52)	Channel	CH 179 : 6845 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	43.0 PK	88.2	-45.2	1.62 H	336	29.8	13.2
2	#13690.00	30.7 AV	68.2	-37.5	1.62 H	336	17.5	13.2
3	20535.00	45.5 PK	74.0	-28.5	1.66 H	7	50.7	-5.2
4	20535.00	33.9 AV	54.0	-20.1	1.66 H	7	39.1	-5.2
5	#27380.00	48.2 PK	88.2	-40.0	1.95 H	80	49.6	-1.4
6	#27380.00	36.8 AV	68.2	-31.4	1.95 H	80	38.2	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	39.9 PK	88.2	-48.3	3.77 V	78	26.7	13.2
2	#13690.00	28.2 AV	68.2	-40.0	3.77 V	78	15.0	13.2
3	20535.00	43.1 PK	74.0	-30.9	2.19 V	132	48.3	-5.2
4	20535.00	32.0 AV	54.0	-22.0	2.19 V	132	37.2	-5.2
5	#27380.00	47.8 PK	88.2	-40.4	1.78 V	202	49.2	-1.4
6	#27380.00	35.4 AV	68.2	-32.8	1.78 V	202	36.8	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RU106

RF Mode	TX 40MHz Preamble 802.11ax (RU106)	Channel	CH 3 : 5965 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	42.9 PK	74.0	-31.1	1.58 H	323	31.4	11.5
2	11930.00	30.2 AV	54.0	-23.8	1.58 H	323	18.7	11.5
3	17895.00	45.4 PK	74.0	-28.6	1.62 H	32	23.3	22.1
4	17895.00	34.0 AV	54.0	-20.0	1.62 H	32	11.9	22.1
5	23860.00	49.3 PK	74.0	-24.7	1.91 H	93	52.6	-3.3
6	23860.00	37.5 AV	54.0	-16.5	1.91 H	93	40.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	40.0 PK	74.0	-34.0	3.69 V	87	28.5	11.5
2	11930.00	28.6 AV	54.0	-25.4	3.69 V	87	17.1	11.5
3	17895.00	44.0 PK	74.0	-30.0	2.32 V	97	21.9	22.1
4	17895.00	33.0 AV	54.0	-21.0	2.32 V	97	10.9	22.1
5	23860.00	46.7 PK	74.0	-27.3	1.78 V	184	50.0	-3.3
6	23860.00	34.5 AV	54.0	-19.5	1.78 V	184	37.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU106)	Channel	CH 43 : 6165 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	42.2 PK	74.0	-31.8	1.55 H	284	31.5	10.7
2	12330.00	29.8 AV	54.0	-24.2	1.55 H	284	19.1	10.7
3	18495.00	44.5 PK	74.0	-29.5	1.60 H	10	51.1	-6.6
4	18495.00	32.8 AV	54.0	-21.2	1.60 H	10	39.4	-6.6
5	#24660.00	47.8 PK	88.2	-40.4	2.00 H	110	49.9	-2.1
6	#24660.00	36.4 AV	68.2	-31.8	2.00 H	110	38.5	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	40.1 PK	74.0	-33.9	3.66 V	76	29.4	10.7
2	12330.00	28.2 AV	54.0	-25.8	3.66 V	76	17.5	10.7
3	18495.00	43.3 PK	74.0	-30.7	2.24 V	112	49.9	-6.6
4	18495.00	32.1 AV	54.0	-21.9	2.24 V	112	38.7	-6.6
5	#24660.00	47.4 PK	88.2	-40.8	1.76 V	180	49.5	-2.1
6	#24660.00	35.5 AV	68.2	-32.7	1.76 V	180	37.6	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU106)	Channel	CH 91 : 6405 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	42.8 PK	88.2	-45.4	1.50 H	327	32.0	10.8
2	#12810.00	30.5 AV	68.2	-37.7	1.50 H	327	19.7	10.8
3	19215.00	45.7 PK	74.0	-28.3	1.59 H	12	52.2	-6.5
4	19215.00	34.2 AV	54.0	-19.8	1.59 H	12	40.7	-6.5
5	#25620.00	48.9 PK	88.2	-39.3	1.90 H	87	50.2	-1.3
6	#25620.00	37.3 AV	68.2	-30.9	1.90 H	87	38.6	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	40.6 PK	88.2	-47.6	3.77 V	80	29.8	10.8
2	#12810.00	29.0 AV	68.2	-39.2	3.77 V	80	18.2	10.8
3	19215.00	43.5 PK	74.0	-30.5	2.32 V	134	50.0	-6.5
4	19215.00	32.1 AV	54.0	-21.9	2.32 V	134	38.6	-6.5
5	#25620.00	47.0 PK	88.2	-41.2	1.74 V	173	48.3	-1.3
6	#25620.00	34.8 AV	68.2	-33.4	1.74 V	173	36.1	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU106)	Channel	CH 123 : 6565 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	41.4 PK	88.2	-46.8	1.65 H	292	30.0	11.4
2	#13130.00	29.6 AV	68.2	-38.6	1.65 H	292	18.2	11.4
3	19695.00	46.8 PK	74.0	-27.2	1.79 H	9	53.0	-6.2
4	19695.00	35.0 AV	54.0	-19.0	1.79 H	9	41.2	-6.2
5	#26260.00	49.1 PK	88.2	-39.1	2.12 H	55	50.1	-1.0
6	#26260.00	37.6 AV	68.2	-30.6	2.12 H	55	38.6	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	40.6 PK	88.2	-47.6	3.75 V	87	29.2	11.4
2	#13130.00	28.5 AV	68.2	-39.7	3.75 V	87	17.1	11.4
3	19695.00	44.0 PK	74.0	-30.0	2.24 V	113	50.2	-6.2
4	19695.00	32.9 AV	54.0	-21.1	2.24 V	113	39.1	-6.2
5	#26260.00	47.0 PK	88.2	-41.2	1.79 V	179	48.0	-1.0
6	#26260.00	34.6 AV	68.2	-33.6	1.79 V	179	35.6	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU106)	Channel	CH 155 : 6725 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	42.3 PK	88.2	-45.9	1.47 H	284	29.7	12.6
2	#13450.00	31.2 AV	68.2	-37.0	1.47 H	284	18.6	12.6
3	20175.00	44.5 PK	74.0	-29.5	1.59 H	27	49.9	-5.4
4	20175.00	33.0 AV	54.0	-21.0	1.59 H	27	38.4	-5.4
5	#26900.00	47.1 PK	88.2	-41.1	1.91 H	63	48.1	-1.0
6	#26900.00	34.8 AV	68.2	-33.4	1.91 H	63	35.8	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	39.3 PK	88.2	-48.9	3.56 V	70	26.7	12.6
2	#13450.00	27.8 AV	68.2	-40.4	3.56 V	70	15.2	12.6
3	20175.00	42.2 PK	74.0	-31.8	2.24 V	116	47.6	-5.4
4	20175.00	30.6 AV	54.0	-23.4	2.24 V	116	36.0	-5.4
5	#26900.00	48.2 PK	88.2	-40.0	1.84 V	147	49.2	-1.0
6	#26900.00	35.6 AV	68.2	-32.6	1.84 V	147	36.6	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU106)	Channel	CH 179 : 6845 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	42.8 PK	88.2	-45.4	1.50 H	297	29.6	13.2
2	#13690.00	31.1 AV	68.2	-37.1	1.50 H	297	17.9	13.2
3	20535.00	43.9 PK	74.0	-30.1	1.43 H	33	49.1	-5.2
4	20535.00	32.8 AV	54.0	-21.2	1.43 H	33	38.0	-5.2
5	#27380.00	46.7 PK	88.2	-41.5	1.86 H	92	48.1	-1.4
6	#27380.00	36.8 AV	68.2	-31.4	1.86 H	92	38.2	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	40.9 PK	88.2	-47.3	3.65 V	93	27.7	13.2
2	#13690.00	29.2 AV	68.2	-39.0	3.65 V	93	16.0	13.2
3	20535.00	43.8 PK	74.0	-30.2	2.35 V	144	49.0	-5.2
4	20535.00	32.6 AV	54.0	-21.4	2.35 V	144	37.8	-5.2
5	#27380.00	47.8 PK	88.2	-40.4	1.82 V	157	49.2	-1.4
6	#27380.00	35.1 AV	68.2	-33.1	1.82 V	157	36.5	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RU242

RF Mode	TX 40MHz Preamble 802.11ax (RU242)	Channel	CH 3 : 5965 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	41.7 PK	74.0	-32.3	1.53 H	345	30.2	11.5
2	11930.00	29.8 AV	54.0	-24.2	1.53 H	345	18.3	11.5
3	17895.00	44.7 PK	74.0	-29.3	1.67 H	27	22.6	22.1
4	17895.00	33.2 AV	54.0	-20.8	1.67 H	27	11.1	22.1
5	23860.00	49.5 PK	74.0	-24.5	2.05 H	60	52.8	-3.3
6	23860.00	38.0 AV	54.0	-16.0	2.05 H	60	41.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	39.4 PK	74.0	-34.6	3.76 V	61	27.9	11.5
2	11930.00	27.7 AV	54.0	-26.3	3.76 V	61	16.2	11.5
3	17895.00	43.4 PK	74.0	-30.6	2.27 V	100	21.3	22.1
4	17895.00	32.3 AV	54.0	-21.7	2.27 V	100	10.2	22.1
5	23860.00	46.0 PK	74.0	-28.0	1.88 V	173	49.3	-3.3
6	23860.00	34.4 AV	54.0	-19.6	1.88 V	173	37.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU242)	Channel	CH 43 : 6165 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	42.5 PK	74.0	-31.5	1.78 H	273	31.8	10.7
2	12330.00	31.0 AV	54.0	-23.0	1.78 H	273	20.3	10.7
3	18495.00	46.3 PK	74.0	-27.7	1.68 H	16	52.9	-6.6
4	18495.00	34.4 AV	54.0	-19.6	1.68 H	16	41.0	-6.6
5	#24660.00	49.8 PK	88.2	-38.4	2.04 H	53	51.9	-2.1
6	#24660.00	37.4 AV	68.2	-30.8	2.04 H	53	39.5	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	41.6 PK	74.0	-32.4	3.68 V	88	30.9	10.7
2	12330.00	29.6 AV	54.0	-24.4	3.68 V	88	18.9	10.7
3	18495.00	42.8 PK	74.0	-31.2	2.29 V	150	49.4	-6.6
4	18495.00	31.9 AV	54.0	-22.1	2.29 V	150	38.5	-6.6
5	#24660.00	47.6 PK	88.2	-40.6	1.87 V	176	49.7	-2.1
6	#24660.00	35.2 AV	68.2	-33.0	1.87 V	176	37.3	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU242)	Channel	CH 91 : 6405 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	42.5 PK	88.2	-45.7	1.60 H	296	31.7	10.8
2	#12810.00	30.1 AV	68.2	-38.1	1.60 H	296	19.3	10.8
3	19215.00	45.4 PK	74.0	-28.6	1.55 H	18	51.9	-6.5
4	19215.00	32.8 AV	54.0	-21.2	1.55 H	18	39.3	-6.5
5	#25620.00	47.1 PK	88.2	-41.1	1.90 H	96	48.4	-1.3
6	#25620.00	35.1 AV	68.2	-33.1	1.90 H	96	36.4	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	39.5 PK	88.2	-48.7	3.78 V	52	28.7	10.8
2	#12810.00	27.7 AV	68.2	-40.5	3.78 V	52	16.9	10.8
3	19215.00	43.8 PK	74.0	-30.2	2.36 V	109	50.3	-6.5
4	19215.00	32.5 AV	54.0	-21.5	2.36 V	109	39.0	-6.5
5	#25620.00	45.6 PK	88.2	-42.6	1.80 V	175	46.9	-1.3
6	#25620.00	34.1 AV	68.2	-34.1	1.80 V	175	35.4	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU242)	Channel	CH 123 : 6565 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	41.8 PK	88.2	-46.4	1.73 H	284	30.4	11.4
2	#13130.00	29.9 AV	68.2	-38.3	1.73 H	284	18.5	11.4
3	19695.00	46.6 PK	74.0	-27.4	1.67 H	33	52.8	-6.2
4	19695.00	34.7 AV	54.0	-19.3	1.67 H	33	40.9	-6.2
5	#26260.00	49.6 PK	88.2	-38.6	2.05 H	78	50.6	-1.0
6	#26260.00	37.9 AV	68.2	-30.3	2.05 H	78	38.9	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	40.4 PK	88.2	-47.8	3.85 V	65	29.0	11.4
2	#13130.00	28.6 AV	68.2	-39.6	3.85 V	65	17.2	11.4
3	19695.00	43.5 PK	74.0	-30.5	2.30 V	150	49.7	-6.2
4	19695.00	32.0 AV	54.0	-22.0	2.30 V	150	38.2	-6.2
5	#26260.00	45.1 PK	88.2	-43.1	1.85 V	138	46.1	-1.0
6	#26260.00	33.7 AV	68.2	-34.5	1.85 V	138	34.7	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU242)	Channel	CH 155 : 6725 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	42.8 PK	88.2	-45.4	1.53 H	262	30.2	12.6
2	#13450.00	30.2 AV	68.2	-38.0	1.53 H	262	17.6	12.6
3	20175.00	44.5 PK	74.0	-29.5	1.44 H	4	49.9	-5.4
4	20175.00	31.9 AV	54.0	-22.1	1.44 H	4	37.3	-5.4
5	#26900.00	48.0 PK	88.2	-40.2	1.89 H	72	49.0	-1.0
6	#26900.00	35.9 AV	68.2	-32.3	1.89 H	72	36.9	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	39.3 PK	88.2	-48.9	3.75 V	61	26.7	12.6
2	#13450.00	27.4 AV	68.2	-40.8	3.75 V	61	14.8	12.6
3	20175.00	43.8 PK	74.0	-30.2	2.25 V	139	49.2	-5.4
4	20175.00	32.7 AV	54.0	-21.3	2.25 V	139	38.1	-5.4
5	#26900.00	45.8 PK	88.2	-42.4	1.90 V	171	46.8	-1.0
6	#26900.00	33.7 AV	68.2	-34.5	1.90 V	171	34.7	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU242)	Channel	CH 179 : 6845 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	42.5 PK	88.2	-45.7	1.83 H	307	29.3	13.2
2	#13690.00	30.7 AV	68.2	-37.5	1.83 H	307	17.5	13.2
3	20535.00	47.5 PK	74.0	-26.5	1.68 H	17	52.7	-5.2
4	20535.00	35.2 AV	54.0	-18.8	1.68 H	17	40.4	-5.2
5	#27380.00	49.6 PK	88.2	-38.6	2.07 H	66	51.0	-1.4
6	#27380.00	37.5 AV	68.2	-30.7	2.07 H	66	38.9	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	40.3 PK	88.2	-47.9	3.84 V	42	27.1	13.2
2	#13690.00	28.0 AV	68.2	-40.2	3.84 V	42	14.8	13.2
3	20535.00	44.0 PK	74.0	-30.0	2.26 V	124	49.2	-5.2
4	20535.00	32.5 AV	54.0	-21.5	2.26 V	124	37.7	-5.2
5	#27380.00	45.4 PK	88.2	-42.8	1.91 V	146	46.8	-1.4
6	#27380.00	33.5 AV	68.2	-34.7	1.91 V	146	34.9	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RU484

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 3 : 5965 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	41.9 PK	74.0	-32.1	1.69 H	265	30.4	11.5
2	11930.00	29.8 AV	54.0	-24.2	1.69 H	265	18.3	11.5
3	17895.00	45.5 PK	74.0	-28.5	1.79 H	17	23.4	22.1
4	17895.00	35.1 AV	54.0	-18.9	1.79 H	17	13.0	22.1
5	23860.00	50.5 PK	74.0	-23.5	2.04 H	78	53.8	-3.3
6	23860.00	38.5 AV	54.0	-15.5	2.04 H	78	41.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	40.2 PK	74.0	-33.8	3.67 V	40	28.7	11.5
2	11930.00	28.1 AV	54.0	-25.9	3.67 V	40	16.6	11.5
3	17895.00	43.8 PK	74.0	-30.2	2.19 V	151	21.7	22.1
4	17895.00	32.3 AV	54.0	-21.7	2.19 V	151	10.2	22.1
5	23860.00	46.7 PK	74.0	-27.3	1.90 V	141	50.0	-3.3
6	23860.00	34.8 AV	54.0	-19.2	1.90 V	141	38.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 43 : 6165 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	42.3 PK	74.0	-31.7	1.88 H	281	31.6	10.7
2	12330.00	30.3 AV	54.0	-23.7	1.88 H	281	19.6	10.7
3	18495.00	47.9 PK	74.0	-26.1	1.68 H	21	54.5	-6.6
4	18495.00	36.0 AV	54.0	-18.0	1.68 H	21	42.6	-6.6
5	#24660.00	49.9 PK	88.2	-38.3	2.05 H	75	52.0	-2.1
6	#24660.00	37.6 AV	68.2	-30.6	2.05 H	75	39.7	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	40.4 PK	74.0	-33.6	3.79 V	88	29.7	10.7
2	12330.00	28.9 AV	54.0	-25.1	3.79 V	88	18.2	10.7
3	18495.00	43.8 PK	74.0	-30.2	2.26 V	117	50.4	-6.6
4	18495.00	32.5 AV	54.0	-21.5	2.26 V	117	39.1	-6.6
5	#24660.00	48.2 PK	88.2	-40.0	1.82 V	157	50.3	-2.1
6	#24660.00	36.1 AV	68.2	-32.1	1.82 V	157	38.2	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 91 : 6405 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	41.7 PK	88.2	-46.5	1.77 H	269	30.9	10.8
2	#12810.00	30.2 AV	68.2	-38.0	1.77 H	269	19.4	10.8
3	19215.00	47.4 PK	74.0	-26.6	1.76 H	8	53.9	-6.5
4	19215.00	35.1 AV	54.0	-18.9	1.76 H	8	41.6	-6.5
5	#25620.00	49.0 PK	88.2	-39.2	2.07 H	40	50.3	-1.3
6	#25620.00	36.9 AV	68.2	-31.3	2.07 H	40	38.2	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	40.9 PK	88.2	-47.3	3.81 V	90	30.1	10.8
2	#12810.00	29.3 AV	68.2	-38.9	3.81 V	90	18.5	10.8
3	19215.00	43.6 PK	74.0	-30.4	2.24 V	103	50.1	-6.5
4	19215.00	32.4 AV	54.0	-21.6	2.24 V	103	38.9	-6.5
5	#25620.00	47.6 PK	88.2	-40.6	1.77 V	145	48.9	-1.3
6	#25620.00	35.6 AV	68.2	-32.6	1.77 V	145	36.9	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 99 : 6445 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	42.0 PK	88.2	-46.2	1.73 H	275	31.3	10.7
2	#12890.00	30.5 AV	68.2	-37.7	1.73 H	275	19.8	10.7
3	19335.00	45.3 PK	74.0	-28.7	1.77 H	16	51.8	-6.5
4	19335.00	34.6 AV	54.0	-19.4	1.77 H	16	41.1	-6.5
5	#25780.00	49.9 PK	88.2	-38.3	2.08 H	77	51.1	-1.2
6	#25780.00	38.0 AV	68.2	-30.2	2.08 H	77	39.2	-1.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	40.4 PK	88.2	-47.8	3.86 V	84	29.7	10.7
2	#12890.00	28.9 AV	68.2	-39.3	3.86 V	84	18.2	10.7
3	19335.00	43.6 PK	74.0	-30.4	2.20 V	102	50.1	-6.5
4	19335.00	32.2 AV	54.0	-21.8	2.20 V	102	38.7	-6.5
5	#25780.00	47.7 PK	88.2	-40.5	1.71 V	149	48.9	-1.2
6	#25780.00	35.8 AV	68.2	-32.4	1.71 V	149	37.0	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 107 : 6485 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	42.1 PK	88.2	-46.1	1.86 H	278	31.3	10.8
2	#12970.00	30.2 AV	68.2	-38.0	1.86 H	278	19.4	10.8
3	19455.00	47.7 PK	74.0	-26.3	1.70 H	28	53.9	-6.2
4	19455.00	36.0 AV	54.0	-18.0	1.70 H	28	42.2	-6.2
5	#25940.00	50.1 PK	88.2	-38.1	2.03 H	84	51.2	-1.1
6	#25940.00	37.9 AV	68.2	-30.3	2.03 H	84	39.0	-1.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	39.9 PK	88.2	-48.3	3.65 V	31	29.1	10.8
2	#12970.00	28.0 AV	68.2	-40.2	3.65 V	31	17.2	10.8
3	19455.00	44.2 PK	74.0	-29.8	2.16 V	135	50.4	-6.2
4	19455.00	32.6 AV	54.0	-21.4	2.16 V	135	38.8	-6.2
5	#25940.00	46.7 PK	88.2	-41.5	1.94 V	143	47.8	-1.1
6	#25940.00	34.9 AV	68.2	-33.3	1.94 V	143	36.0	-1.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 115 : 6525 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	41.9 PK	88.2	-46.3	1.78 H	253	30.8	11.1
2	#13050.00	30.7 AV	68.2	-37.5	1.78 H	253	19.6	11.1
3	19575.00	47.2 PK	74.0	-26.8	1.75 H	15	53.5	-6.3
4	19575.00	34.7 AV	54.0	-19.3	1.75 H	15	41.0	-6.3
5	#26100.00	48.8 PK	88.2	-39.4	2.09 H	24	49.8	-1.0
6	#26100.00	36.8 AV	68.2	-31.4	2.09 H	24	37.8	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	40.6 PK	88.2	-47.6	3.84 V	89	29.5	11.1
2	#13050.00	29.2 AV	68.2	-39.0	3.84 V	89	18.1	11.1
3	19575.00	43.8 PK	74.0	-30.2	2.18 V	93	50.1	-6.3
4	19575.00	32.4 AV	54.0	-21.6	2.18 V	93	38.7	-6.3
5	#26100.00	47.5 PK	88.2	-40.7	1.77 V	132	48.5	-1.0
6	#26100.00	35.5 AV	68.2	-32.7	1.77 V	132	36.5	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 123 : 6565 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	42.4 PK	88.2	-45.8	1.82 H	286	31.0	11.4
2	#13130.00	30.6 AV	68.2	-37.6	1.82 H	286	19.2	11.4
3	19695.00	46.6 PK	74.0	-27.4	1.76 H	11	52.8	-6.2
4	19695.00	34.7 AV	54.0	-19.3	1.76 H	11	40.9	-6.2
5	#26260.00	49.0 PK	88.2	-39.2	2.04 H	46	50.0	-1.0
6	#26260.00	37.2 AV	68.2	-31.0	2.04 H	46	38.2	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	39.8 PK	88.2	-48.4	3.66 V	16	28.4	11.4
2	#13130.00	28.0 AV	68.2	-40.2	3.66 V	16	16.6	11.4
3	19695.00	44.5 PK	74.0	-29.5	2.12 V	132	50.7	-6.2
4	19695.00	32.9 AV	54.0	-21.1	2.12 V	132	39.1	-6.2
5	#26260.00	47.2 PK	88.2	-41.0	1.96 V	133	48.2	-1.0
6	#26260.00	35.2 AV	68.2	-33.0	1.96 V	133	36.2	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 155 : 6725 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	41.8 PK	88.2	-46.4	1.83 H	243	29.2	12.6
2	#13450.00	30.5 AV	68.2	-37.7	1.83 H	243	17.9	12.6
3	20175.00	47.1 PK	74.0	-26.9	1.69 H	26	52.5	-5.4
4	20175.00	34.6 AV	54.0	-19.4	1.69 H	26	40.0	-5.4
5	#26900.00	48.3 PK	88.2	-39.9	2.13 H	27	49.3	-1.0
6	#26900.00	36.4 AV	68.2	-31.8	2.13 H	27	37.4	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	40.3 PK	88.2	-47.9	3.91 V	57	27.7	12.6
2	#13450.00	28.3 AV	68.2	-39.9	3.91 V	57	15.7	12.6
3	20175.00	43.1 PK	74.0	-30.9	2.30 V	136	48.5	-5.4
4	20175.00	31.8 AV	54.0	-22.2	2.30 V	136	37.2	-5.4
5	#26900.00	46.6 PK	88.2	-41.6	1.87 V	182	47.6	-1.0
6	#26900.00	34.6 AV	68.2	-33.6	1.87 V	182	35.6	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 179 : 6845 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	42.3 PK	88.2	-45.9	1.92 H	276	29.1	13.2
2	#13690.00	30.1 AV	68.2	-38.1	1.92 H	276	16.9	13.2
3	20535.00	47.1 PK	74.0	-26.9	1.66 H	36	52.3	-5.2
4	20535.00	35.6 AV	54.0	-18.4	1.66 H	36	40.8	-5.2
5	#27380.00	50.4 PK	88.2	-37.8	2.08 H	80	51.8	-1.4
6	#27380.00	38.0 AV	68.2	-30.2	2.08 H	80	39.4	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	40.8 PK	88.2	-47.4	3.90 V	69	27.6	13.2
2	#13690.00	29.2 AV	68.2	-39.0	3.90 V	69	16.0	13.2
3	20535.00	43.0 PK	74.0	-31.0	2.18 V	97	48.2	-5.2
4	20535.00	31.8 AV	54.0	-22.2	2.18 V	97	37.0	-5.2
5	#27380.00	47.3 PK	88.2	-40.9	1.76 V	142	48.7	-1.4
6	#27380.00	35.5 AV	68.2	-32.7	1.76 V	142	36.9	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 187 : 6885 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	42.7 PK	88.2	-45.5	1.63 H	288	29.4	13.3
2	#13770.00	30.5 AV	68.2	-37.7	1.63 H	288	17.2	13.3
3	20655.00	44.5 PK	74.0	-29.5	1.59 H	3	49.4	-4.9
4	20655.00	32.4 AV	54.0	-21.6	1.59 H	3	37.3	-4.9
5	#27540.00	47.3 PK	88.2	-40.9	1.95 H	93	48.8	-1.5
6	#27540.00	35.5 AV	68.2	-32.7	1.95 H	93	37.0	-1.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	40.8 PK	88.2	-47.4	3.92 V	68	27.5	13.3
2	#13770.00	29.4 AV	68.2	-38.8	3.92 V	68	16.1	13.3
3	20655.00	42.9 PK	74.0	-31.1	2.18 V	104	47.8	-4.9
4	20655.00	31.4 AV	54.0	-22.6	2.18 V	104	36.3	-4.9
5	#27540.00	46.8 PK	88.2	-41.4	1.81 V	152	48.3	-1.5
6	#27540.00	35.1 AV	68.2	-33.1	1.81 V	152	36.6	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 211 : 7005 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	42.5 PK	88.2	-45.7	1.91 H	291	29.0	13.5
2	#14010.00	30.5 AV	68.2	-37.7	1.91 H	291	17.0	13.5
3	21015.00	46.8 PK	74.0	-27.2	1.65 H	45	51.3	-4.5
4	21015.00	35.5 AV	54.0	-18.5	1.65 H	45	40.0	-4.5
5	#28020.00	49.8 PK	88.2	-38.4	2.13 H	89	51.5	-1.7
6	#28020.00	37.6 AV	68.2	-30.6	2.13 H	89	39.3	-1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	40.7 PK	88.2	-47.5	3.88 V	69	27.2	13.5
2	#14010.00	29.1 AV	68.2	-39.1	3.88 V	69	15.6	13.5
3	21015.00	43.6 PK	74.0	-30.4	2.19 V	109	48.1	-4.5
4	21015.00	32.5 AV	54.0	-21.5	2.19 V	109	37.0	-4.5
5	#28020.00	47.4 PK	88.2	-40.8	1.76 V	150	49.1	-1.7
6	#28020.00	35.3 AV	68.2	-32.9	1.76 V	150	37.0	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 227 : 7085 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	42.3 PK	88.2	-45.9	1.88 H	247	28.0	14.3
2	#14170.00	30.8 AV	68.2	-37.4	1.88 H	247	16.5	14.3
3	21255.00	46.7 PK	74.0	-27.3	1.68 H	35	51.0	-4.3
4	21255.00	34.5 AV	54.0	-19.5	1.68 H	35	38.8	-4.3
5	#28340.00	48.2 PK	88.2	-40.0	2.13 H	75	49.8	-1.6
6	#28340.00	36.3 AV	68.2	-31.9	2.13 H	75	37.9	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	40.7 PK	88.2	-47.5	3.82 V	96	26.4	14.3
2	#14170.00	29.1 AV	68.2	-39.1	3.82 V	96	14.8	14.3
3	21255.00	43.3 PK	74.0	-30.7	2.25 V	97	47.6	-4.3
4	21255.00	32.0 AV	54.0	-22.0	2.25 V	97	36.3	-4.3
5	#28340.00	47.9 PK	88.2	-40.3	1.77 V	144	49.5	-1.6
6	#28340.00	35.7 AV	68.2	-32.5	1.77 V	144	37.3	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

80Mz Preamble

RU996

RF Mode	TX 80MHz Preamble 802.11ax (RU996)	Channel	CH 7 : 5985 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	41.7 PK	74.0	-32.3	1.39 H	345	30.4	11.3
2	11970.00	30.2 AV	54.0	-23.8	1.39 H	345	18.9	11.3
3	17955.00	45.6 PK	74.0	-28.4	1.59 H	3	22.0	23.6
4	17955.00	34.2 AV	54.0	-19.8	1.59 H	3	10.6	23.6
5	23940.00	49.3 PK	74.0	-24.7	2.11 H	63	52.4	-3.1
6	23940.00	37.6 AV	54.0	-16.4	2.11 H	63	40.7	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	41.6 PK	74.0	-32.4	3.86 V	95	30.3	11.3
2	11970.00	30.1 AV	54.0	-23.9	3.86 V	95	18.8	11.3
3	17955.00	44.8 PK	74.0	-29.2	2.16 V	110	21.2	23.6
4	17955.00	32.0 AV	54.0	-22.0	2.16 V	110	8.4	23.6
5	23940.00	46.1 PK	74.0	-27.9	1.96 V	150	49.2	-3.1
6	23940.00	35.7 AV	54.0	-18.3	1.96 V	150	38.8	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 80MHz Preamble 802.11ax (RU996)	Channel	CH 39 : 6145 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	42.0 PK	74.0	-32.0	1.40 H	340	31.1	10.9
2	12290.00	30.2 AV	54.0	-23.8	1.40 H	340	19.3	10.9
3	#12770.00	41.2 PK	88.2	-47.0	1.48 H	334	30.4	10.8
4	#12770.00	29.3 AV	68.2	-38.9	1.48 H	334	18.5	10.8
5	18435.00	45.6 PK	74.0	-28.4	1.59 H	33	52.2	-6.6
6	18435.00	34.1 AV	54.0	-19.9	1.59 H	33	40.7	-6.6
7	19155.00	44.9 PK	74.0	-29.1	1.69 H	8	51.4	-6.5
8	19155.00	33.7 AV	54.0	-20.3	1.69 H	8	40.2	-6.5
9	#24580.00	49.0 PK	88.2	-39.2	2.02 H	63	51.3	-2.3
10	#24580.00	37.9 AV	68.2	-30.3	2.02 H	63	40.2	-2.3
11	#25540.00	49.6 PK	88.2	-38.6	1.98 H	66	51.0	-1.4
12	#25540.00	38.0 AV	68.2	-30.2	1.98 H	66	39.4	-1.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	39.6 PK	74.0	-34.4	3.77 V	119	28.7	10.9
2	12290.00	27.6 AV	54.0	-26.4	3.77 V	119	16.7	10.9
3	#12770.00	39.9 PK	88.2	-48.3	3.66 V	88	29.1	10.8
4	#12770.00	28.4 AV	68.2	-39.8	3.66 V	88	17.6	10.8
5	18435.00	45.4 PK	74.0	-28.6	1.94 V	79	52.0	-6.6
6	18435.00	31.6 AV	54.0	-22.4	1.94 V	79	38.2	-6.6
7	19155.00	43.6 PK	74.0	-30.4	2.28 V	97	50.1	-6.5
8	19155.00	32.8 AV	54.0	-21.2	2.28 V	97	39.3	-6.5
9	#24580.00	46.4 PK	88.2	-41.8	1.91 V	155	48.7	-2.3
10	#24580.00	35.6 AV	68.2	-32.6	1.91 V	155	37.9	-2.3
11	#25540.00	46.6 PK	88.2	-41.6	1.98 V	145	48.0	-1.4
12	#25540.00	36.1 AV	68.2	-32.1	1.98 V	145	37.5	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 80MHz Preamble 802.11ax (RU996)	Channel	CH 135 : 6625 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	41.4 PK	74.0	-32.6	1.54 H	359	29.6	11.8
2	13250.00	29.3 AV	54.0	-24.7	1.54 H	359	17.5	11.8
3	19875.00	45.9 PK	74.0	-28.1	1.76 H	20	51.9	-6.0
4	19875.00	33.8 AV	54.0	-20.2	1.76 H	20	39.8	-6.0
5	#26500.00	49.5 PK	88.2	-38.7	1.98 H	63	49.9	-0.4
6	#26500.00	37.4 AV	68.2	-30.8	1.98 H	63	37.8	-0.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	40.6 PK	74.0	-33.4	3.76 V	86	28.8	11.8
2	13250.00	29.5 AV	54.0	-24.5	3.76 V	86	17.7	11.8
3	19875.00	44.0 PK	74.0	-30.0	2.07 V	124	50.0	-6.0
4	19875.00	31.1 AV	54.0	-22.9	2.07 V	124	37.1	-6.0
5	#26500.00	46.7 PK	88.2	-41.5	1.93 V	149	47.1	-0.4
6	#26500.00	36.2 AV	68.2	-32.0	1.93 V	149	36.6	-0.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 80MHz Preamble 802.11ax (RU996)	Channel	CH 151 : 6705 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	41.7 PK	88.2	-46.5	1.56 H	349	29.4	12.3
2	#13410.00	29.6 AV	68.2	-38.6	1.56 H	349	17.3	12.3
3	20115.00	45.9 PK	74.0	-28.1	1.62 H	11	51.4	-5.5
4	20115.00	34.2 AV	54.0	-19.8	1.62 H	11	39.7	-5.5
5	#26820.00	49.0 PK	88.2	-39.2	2.06 H	44	49.8	-0.8
6	#26820.00	37.8 AV	68.2	-30.4	2.06 H	44	38.6	-0.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	41.5 PK	88.2	-46.7	3.71 V	115	29.2	12.3
2	#13410.00	30.0 AV	68.2	-38.2	3.71 V	115	17.7	12.3
3	20115.00	44.1 PK	74.0	-29.9	2.10 V	76	49.6	-5.5
4	20115.00	31.2 AV	54.0	-22.8	2.10 V	76	36.7	-5.5
5	#26820.00	45.4 PK	88.2	-42.8	1.97 V	167	46.2	-0.8
6	#26820.00	35.3 AV	68.2	-32.9	1.97 V	167	36.1	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 80MHz Preamble 802.11ax (RU996)	Channel	CH 167 : 6785 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	41.6 PK	88.2	-46.6	1.54 H	323	28.6	13.0
2	#13570.00	29.7 AV	68.2	-38.5	1.54 H	323	16.7	13.0
3	20355.00	45.6 PK	74.0	-28.4	1.69 H	4	51.1	-5.5
4	20355.00	33.9 AV	54.0	-20.1	1.69 H	4	39.4	-5.5
5	#27140.00	49.4 PK	88.2	-38.8	1.96 H	68	50.8	-1.4
6	#27140.00	37.4 AV	68.2	-30.8	1.96 H	68	38.8	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	40.3 PK	88.2	-47.9	3.73 V	86	27.3	13.0
2	#13570.00	28.5 AV	68.2	-39.7	3.73 V	86	15.5	13.0
3	20355.00	43.7 PK	74.0	-30.3	2.28 V	109	49.2	-5.5
4	20355.00	32.8 AV	54.0	-21.2	2.28 V	109	38.3	-5.5
5	#27140.00	46.4 PK	88.2	-41.8	1.95 V	180	47.8	-1.4
6	#27140.00	35.8 AV	68.2	-32.4	1.95 V	180	37.2	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

160MHz Preamble

RU1992

RF Mode	TX 160MHz Preamble 802.11ax (RU1992)	Channel	CH 15 : 6025 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	41.2 PK	74.0	-32.8	1.61 H	322	30.0	11.2
2	12050.00	29.5 AV	54.0	-24.5	1.61 H	322	18.3	11.2
3	18075.00	45.7 PK	74.0	-28.3	1.60 H	14	44.6	1.1
4	18075.00	34.1 AV	54.0	-19.9	1.60 H	14	33.0	1.1
5	#24100.00	49.6 PK	88.2	-38.6	2.10 H	73	52.5	-2.9
6	#24100.00	37.7 AV	68.2	-30.5	2.10 H	73	40.6	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	41.0 PK	74.0	-33.0	3.70 V	69	29.8	11.2
2	12050.00	29.7 AV	54.0	-24.3	3.70 V	69	18.5	11.2
3	18075.00	44.0 PK	74.0	-30.0	2.08 V	117	42.9	1.1
4	18075.00	31.1 AV	54.0	-22.9	2.08 V	117	30.0	1.1
5	#24100.00	47.2 PK	88.2	-41.0	1.90 V	166	50.1	-2.9
6	#24100.00	36.8 AV	68.2	-31.4	1.90 V	166	39.7	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 160MHz Preamble 802.11ax (RU1992)	Channel	CH 47 : 6185 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	40.6 PK	74.0	-33.4	1.51 H	288	30.2	10.4
2	12370.00	29.1 AV	54.0	-24.9	1.51 H	288	18.7	10.4
3	18555.00	44.5 PK	74.0	-29.5	1.73 H	43	51.1	-6.6
4	18555.00	33.3 AV	54.0	-20.7	1.73 H	43	39.9	-6.6
5	#24740.00	48.6 PK	88.2	-39.6	2.10 H	43	50.7	-2.1
6	#24740.00	37.4 AV	68.2	-30.8	2.10 H	43	39.5	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	40.3 PK	74.0	-33.7	3.57 V	117	29.9	10.4
2	12370.00	28.5 AV	54.0	-25.5	3.57 V	117	18.1	10.4
3	18555.00	44.3 PK	74.0	-29.7	2.21 V	119	50.9	-6.6
4	18555.00	31.0 AV	54.0	-23.0	2.21 V	119	37.6	-6.6
5	#24740.00	47.2 PK	88.2	-41.0	2.00 V	155	49.3	-2.1
6	#24740.00	36.6 AV	68.2	-31.6	2.00 V	155	38.7	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 160MHz Preamble 802.11ax (RU1992)	Channel	CH 79 : 6345 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	41.6 PK	74.0	-32.4	1.52 H	301	30.8	10.8
2	12690.00	29.4 AV	54.0	-24.6	1.52 H	301	18.6	10.8
3	19035.00	45.7 PK	74.0	-28.3	1.57 H	20	52.0	-6.3
4	19035.00	34.0 AV	54.0	-20.0	1.57 H	20	40.3	-6.3
5	#25380.00	49.9 PK	88.2	-38.3	2.03 H	63	51.5	-1.6
6	#25380.00	38.3 AV	68.2	-29.9	2.03 H	63	39.9	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	40.3 PK	74.0	-33.7	3.70 V	107	29.5	10.8
2	12690.00	29.2 AV	54.0	-24.8	3.70 V	107	18.4	10.8
3	19035.00	44.1 PK	74.0	-29.9	1.99 V	136	50.4	-6.3
4	19035.00	31.7 AV	54.0	-22.3	1.99 V	136	38.0	-6.3
5	#25380.00	46.8 PK	88.2	-41.4	1.94 V	175	48.4	-1.6
6	#25380.00	36.6 AV	68.2	-31.6	1.94 V	175	38.2	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 160MHz Preamble 802.11ax (RU1992)	Channel	CH 143 : 6665 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	40.4 PK	74.0	-33.6	1.51 H	326	28.4	12.0
2	13330.00	28.6 AV	54.0	-25.4	1.51 H	326	16.6	12.0
3	19995.00	44.0 PK	74.0	-30.0	1.69 H	23	49.9	-5.9
4	19995.00	32.8 AV	54.0	-21.2	1.69 H	23	38.7	-5.9
5	#26660.00	49.8 PK	88.2	-38.4	2.08 H	51	50.1	-0.3
6	#26660.00	38.1 AV	68.2	-30.1	2.08 H	51	38.4	-0.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	40.2 PK	74.0	-33.8	3.71 V	95	28.2	12.0
2	13330.00	28.2 AV	54.0	-25.8	3.71 V	95	16.2	12.0
3	19995.00	44.1 PK	74.0	-29.9	2.29 V	107	50.0	-5.9
4	19995.00	33.0 AV	54.0	-21.0	2.29 V	107	38.9	-5.9
5	#26660.00	45.9 PK	88.2	-42.3	2.01 V	189	46.2	-0.3
6	#26660.00	35.9 AV	68.2	-32.3	2.01 V	189	36.2	-0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

4.1.9 Test Results (Conducted Measurement)

Radiated versus Conducted Measurement	
☒ Conducted measurement	☐ Radiated measurement
<u>For Radiated measurement:</u> The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation) <u>For Conducted measurement:</u> The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).	

Conducted Emission Convert Formula
a. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8 d = measurement distance in 3 meters. b. EIRP Level (dBm) = Raw Value(dBm) + Correction Factor(dB) c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands. For the band edge the gain for the specific band may have been used. Notes: 1. In restricted bands below 1000 MHz, add upper bound on ground plane reflection: For f = 30 – 1000 MHz, add 4.7 dB. 2. The conducted emission test was considered some factor to compute test result.

Above 1GHz Data (For Mode1: Standard AP Client):

802.11a - Channel 2

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1725 PK	54.77	74	-19.23	-52.27	-51.15	8.17	-40.49
2	1729.68 AV	34.6	54	-19.4	-71.75	-71.94	8.17	-60.66
3	5482.81 PK	58.84	88.2	-29.36	-48.27	-47.02	8.17	-36.42
4	5487.5 AV	38.14	68.2	-30.06	-68.2	-68.4	8.17	-57.12
5	5759.37 PK	59.5	88.2	-28.7	-47.23	-46.66	8.17	-35.76
6	5759.37 AV	45.99	68.2	-22.21	-59.9	-61.08	8.17	-49.27
7	3960.93 PK	57.68	74	-16.32	-49.08	-48.46	8.17	-37.58
8	3956.25 AV	36.9	54	-17.1	-69.38	-69.7	8.17	-58.36
9	11867.18 PK	59.98	74	-14.02	-46.12	-46.82	8.17	-35.28
10	11865.62 AV	39.03	54	-14.97	-67.57	-67.26	8.17	-56.23
11	17803.87 PK	53.6	74	-20.4	-51.65	-54.49	8.17	-41.66
12	17809.62 AV	42.24	54	-11.76	-64	-64.41	8.17	-53.02

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

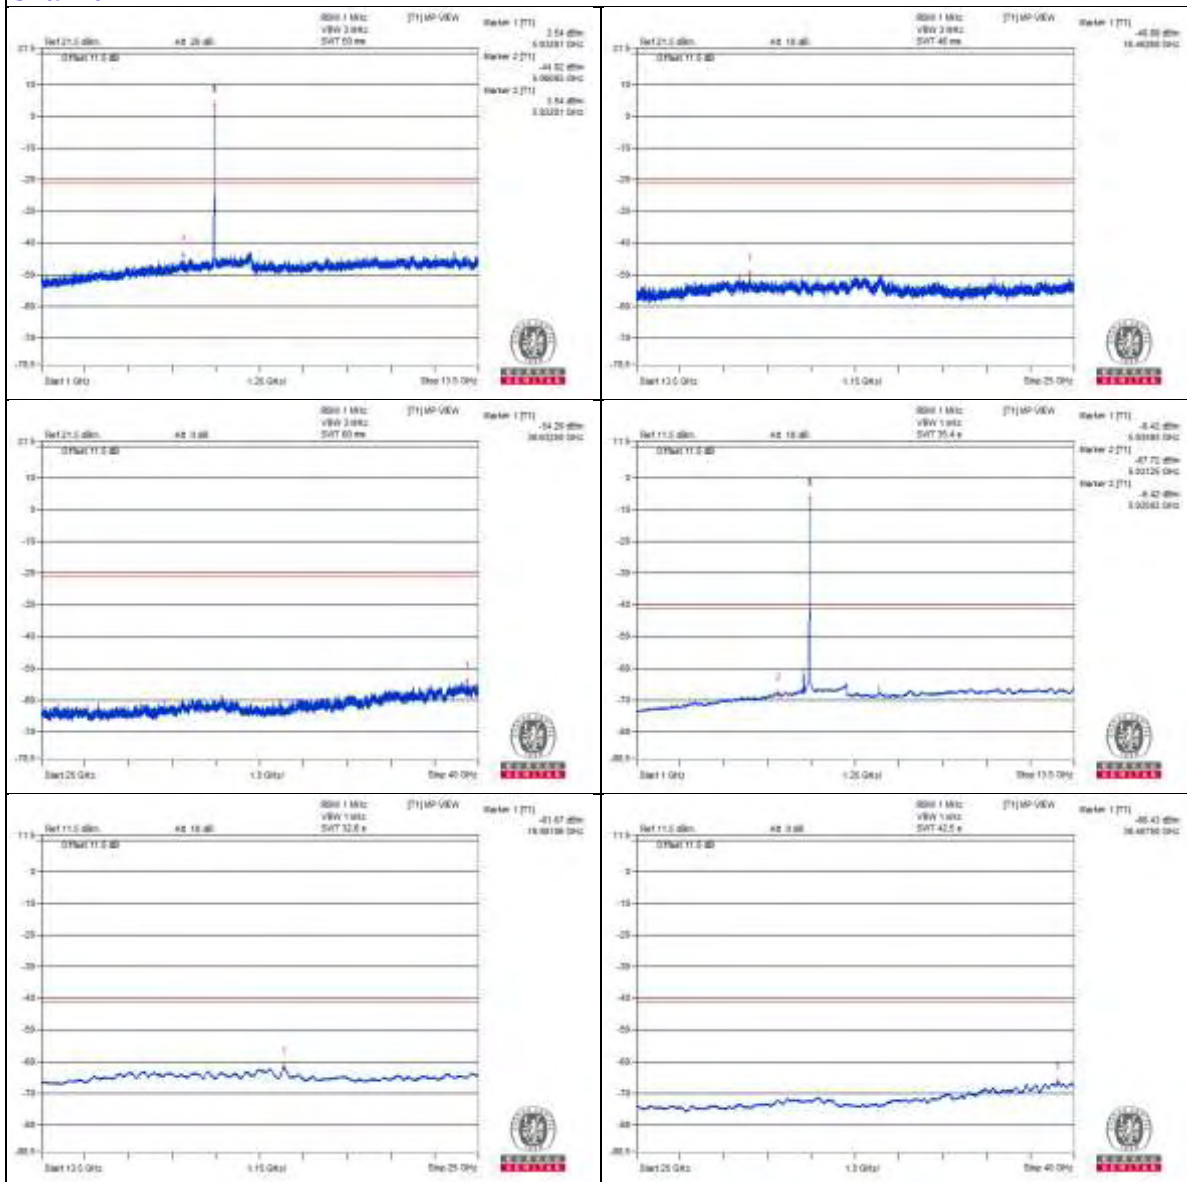

Chain 1

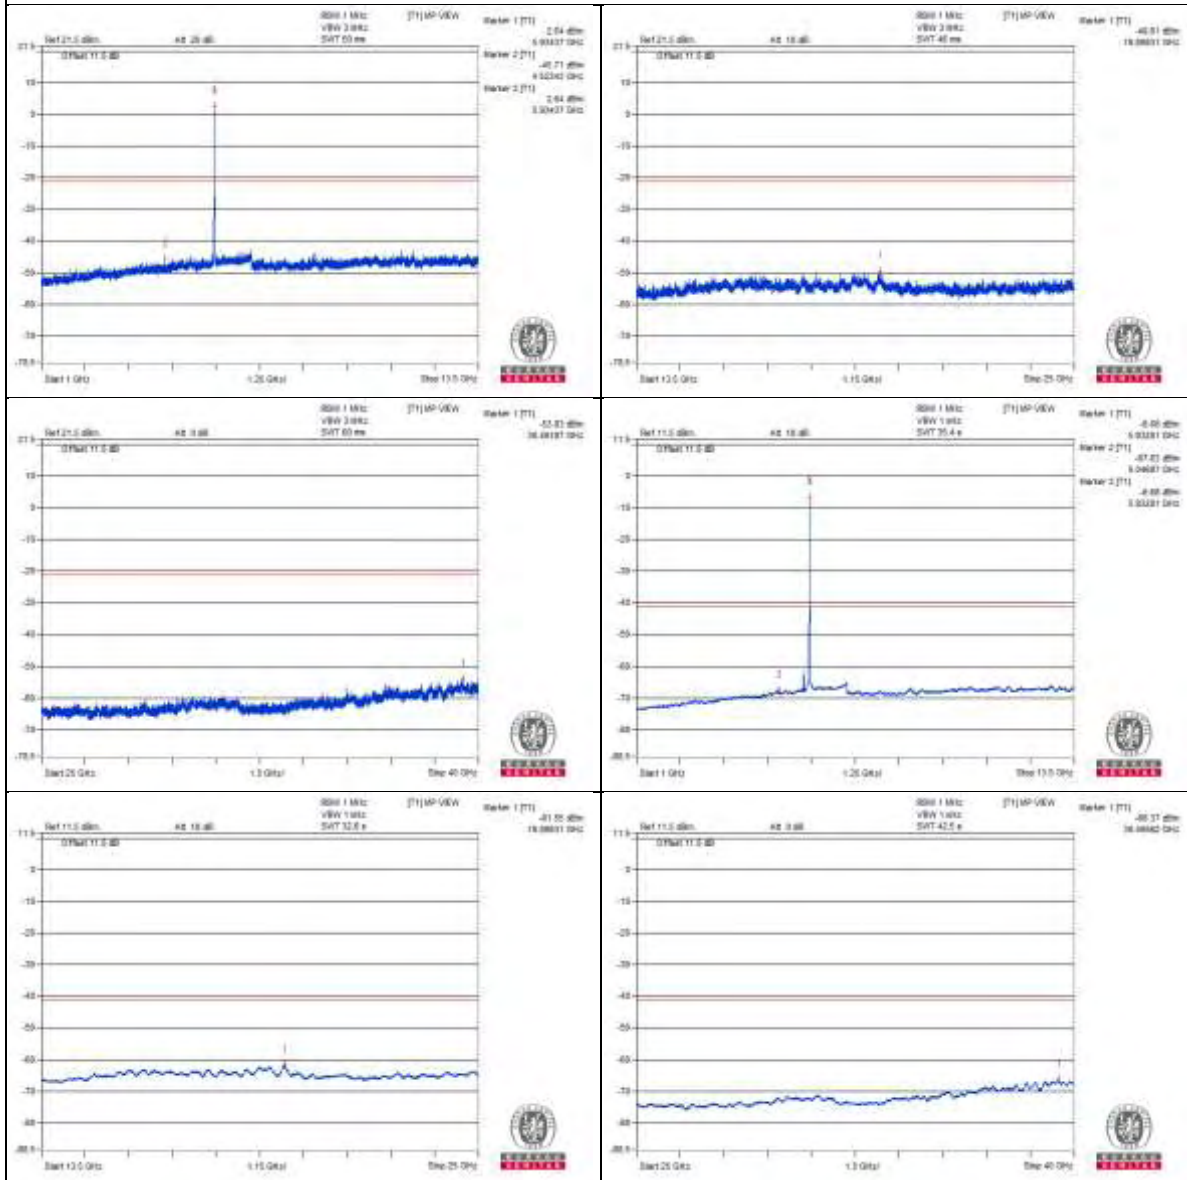

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5925 PK	90.6	88.2	*2.4	-16.56	-15.18	8.15	-4.66
2	5925 AV	71.02	68.2	*2.82	-35.49	-35.31	8.15	-24.24


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

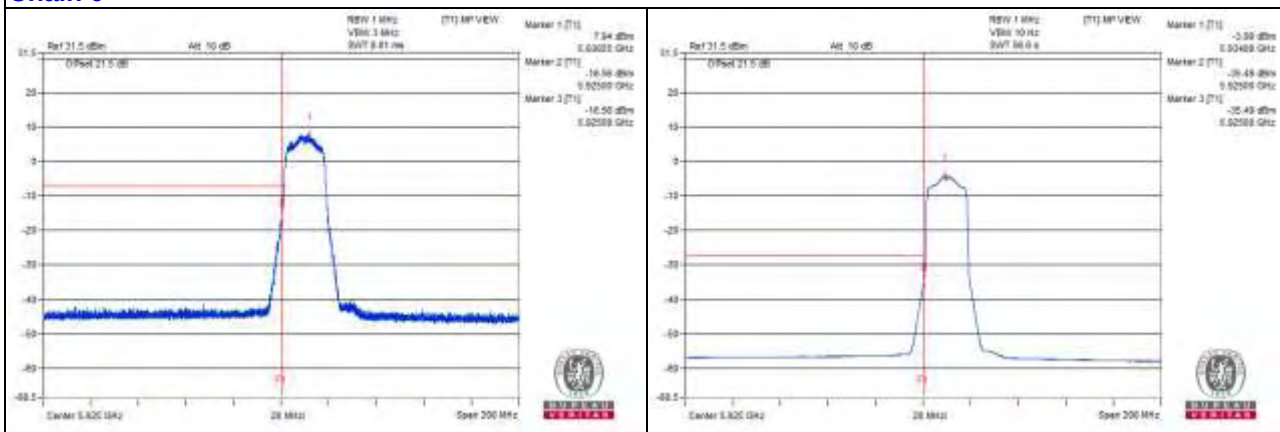

Chain 1

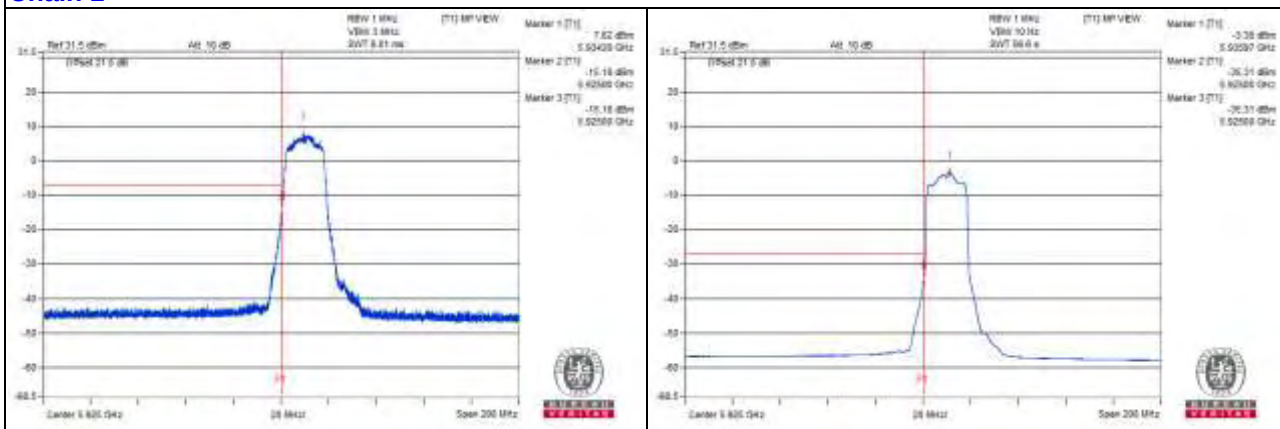

802.11a - Channel 1

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1750 PK	55.55	74	-18.45	-50.47	-51.35	8.17	-39.71
2	1750 AV	47.08	54	-6.92	-58.85	-59.94	8.17	-48.18
3	5485.93 PK	59.55	88.2	-28.65	-46.02	-47.99	8.17	-35.71
4	5479.68 AV	39.45	68.2	-28.75	-67.44	-66.58	8.17	-55.81
5	5759.37 PK	61.89	88.2	-26.31	-44.1	-45.06	8.17	-33.37
6	5759.37 AV	55.3	68.2	-12.9	-50.63	-51.72	8.17	-39.96
7	3968.75 PK	58.41	74	-15.59	-48	-48.06	8.17	-36.85
8	3970.31 AV	37.08	54	-16.92	-69.45	-69.27	8.17	-58.18
9	11909.37 PK	61.06	74	-12.94	-44.08	-47.23	8.17	-34.2
10	11909.37 AV	42.77	54	-11.23	-62.31	-65.66	8.17	-52.49
11	17862.81 PK	53.66	74	-20.34	-52.33	-53.29	8.17	-41.6
12	17861.37 AV	43.89	54	-10.11	-62.48	-62.62	8.17	-51.37

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 1

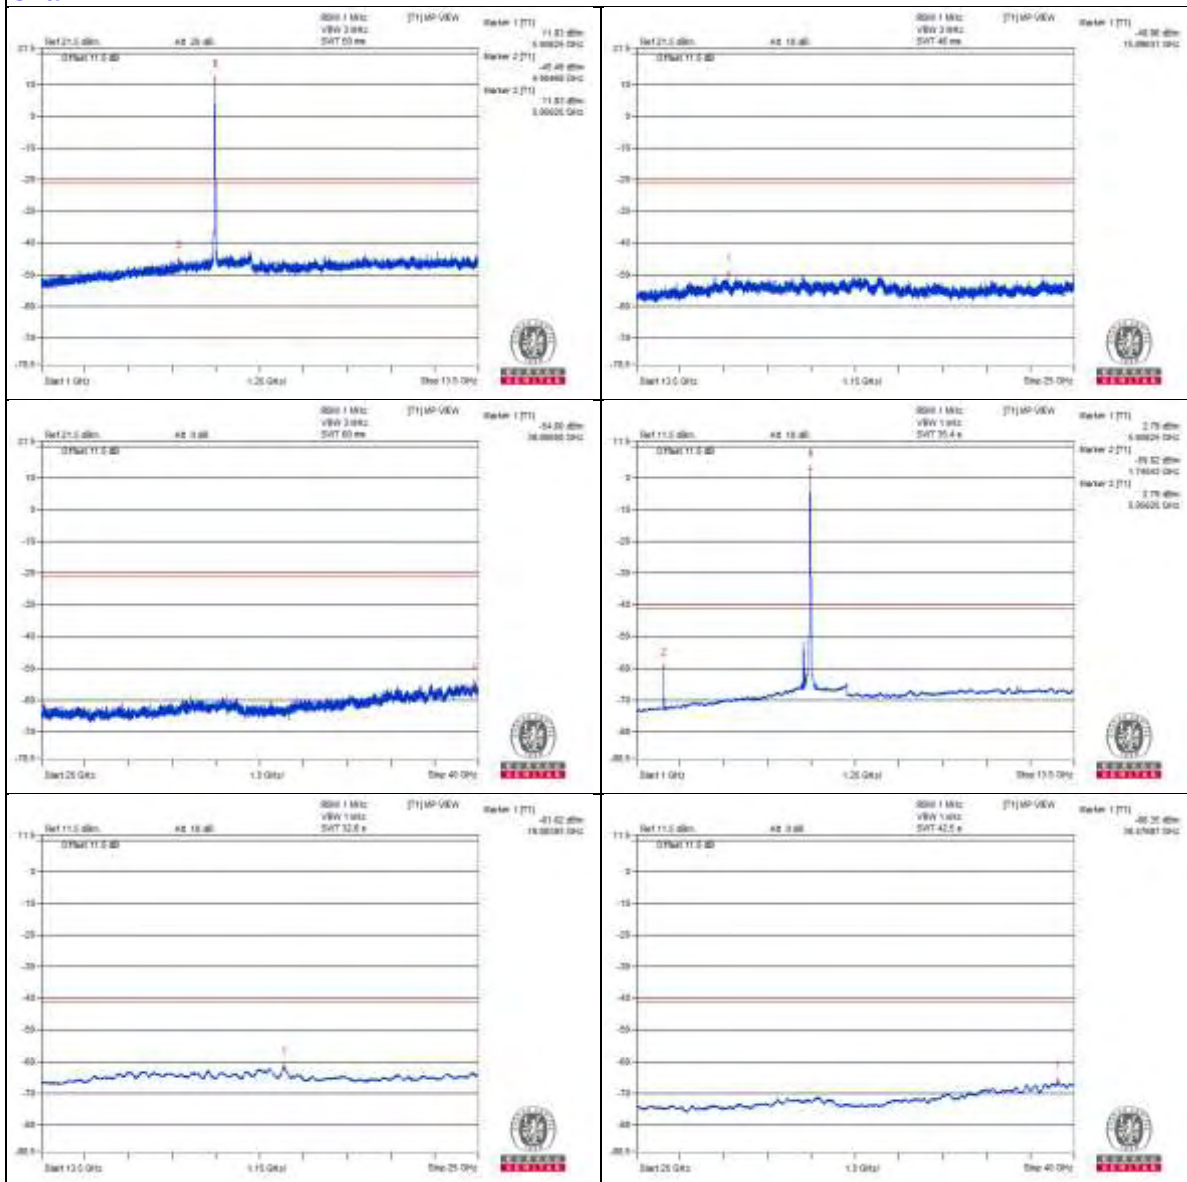

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5924.9 PK	77.54	88.2	-10.66	-26.99	-32.29	8.15	-17.72
2	5924.97 AV	62.3	68.2	-5.9	-42.98	-45.67	8.15	-32.96


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

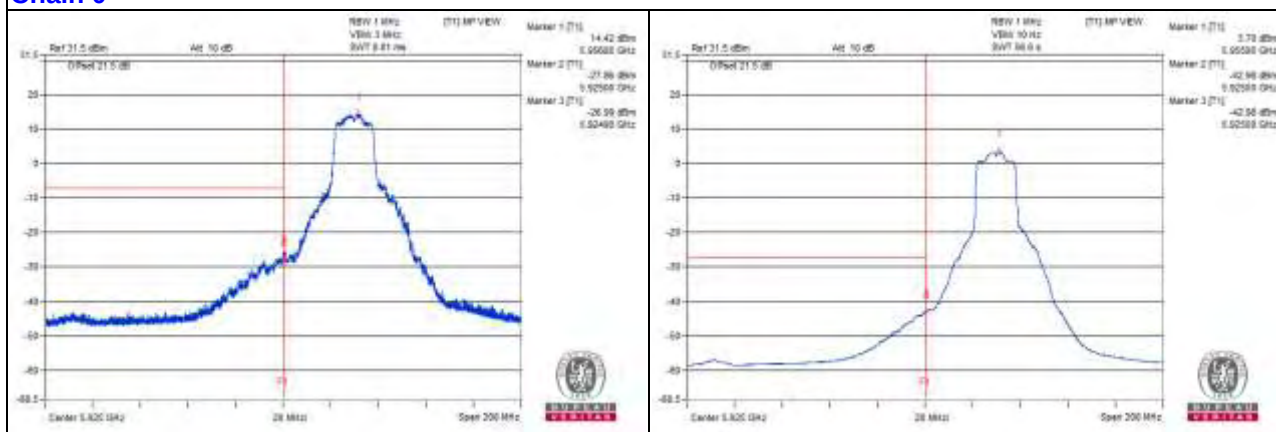

Chain 1

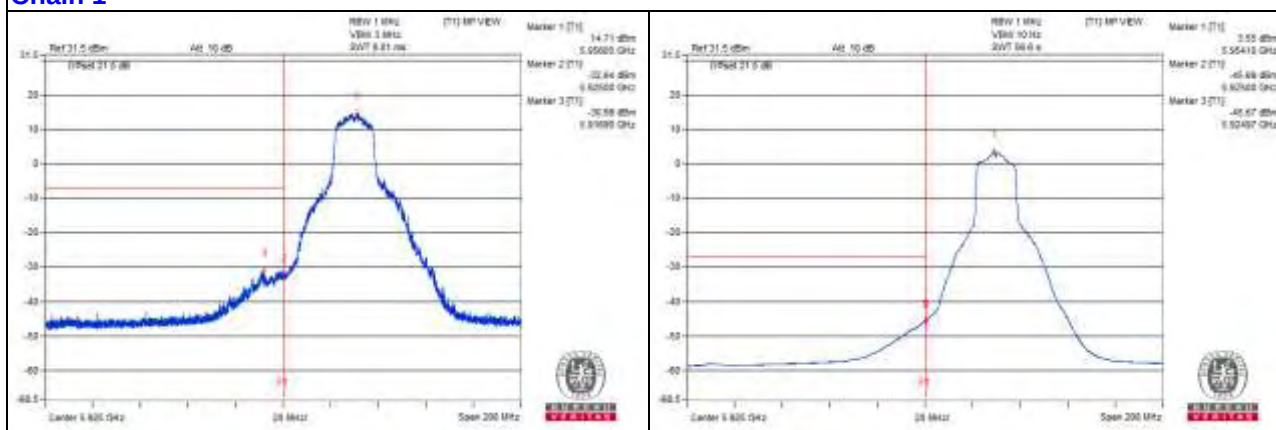

802.11a - Channel 45

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1970.31 PK	56.18	74	-17.82	-50.17	-50.35	8.17	-39.08
2	1968.75 AV	47.56	54	-6.44	-58.6	-59.17	8.17	-47.7
3	5481.25 PK	59.71	88.2	-28.49	-47.34	-46.2	8.17	-35.55
4	5479.68 AV	39.62	68.2	-28.58	-66.48	-67.2	8.17	-55.64
5	5759.37 PK	62.3	88.2	-25.9	-43.65	-44.7	8.17	-32.96
6	5759.37 AV	57.03	68.2	-11.17	-48.89	-50	8.17	-38.23
7	4118.75 PK	57.69	74	-16.31	-49.1	-48.43	8.17	-37.57
8	4117.18 AV	37.34	54	-16.66	-69.03	-69.18	8.17	-57.92
9	12350 PK	60.96	74	-13.04	-46.46	-44.68	8.17	-34.3
10	12350 AV	44.72	54	-9.28	-63.47	-60.47	8.17	-50.54
11	18528.37 PK	55.99	74	-18.01	-50.73	-50.19	8.17	-39.27
12	18522.62 AV	43.97	54	-10.03	-62.4	-62.54	8.17	-51.29

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

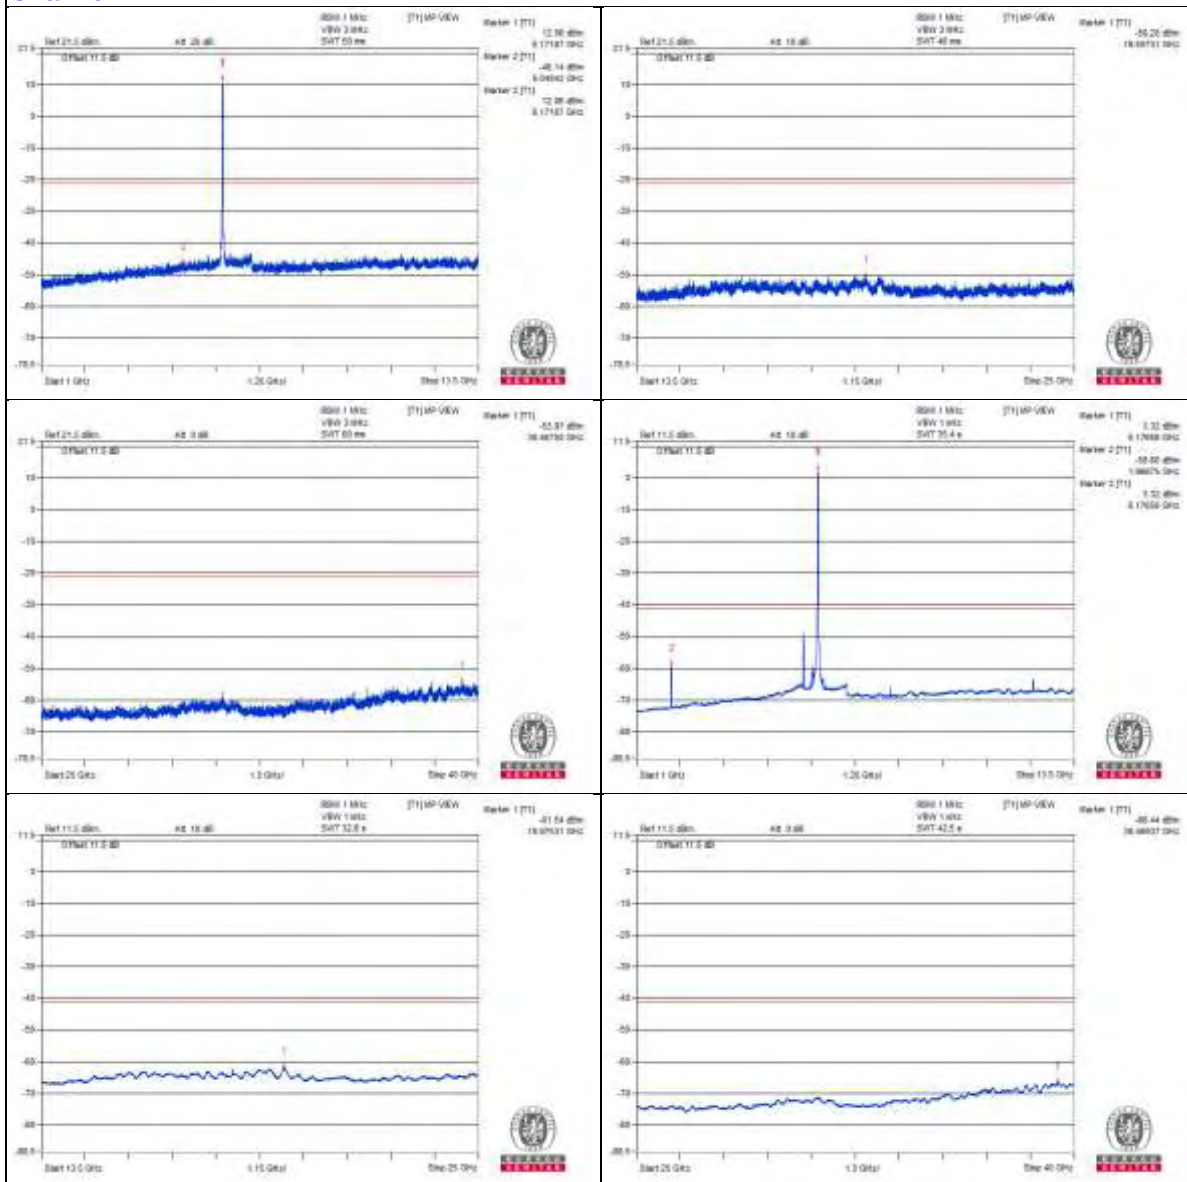

Chain 1

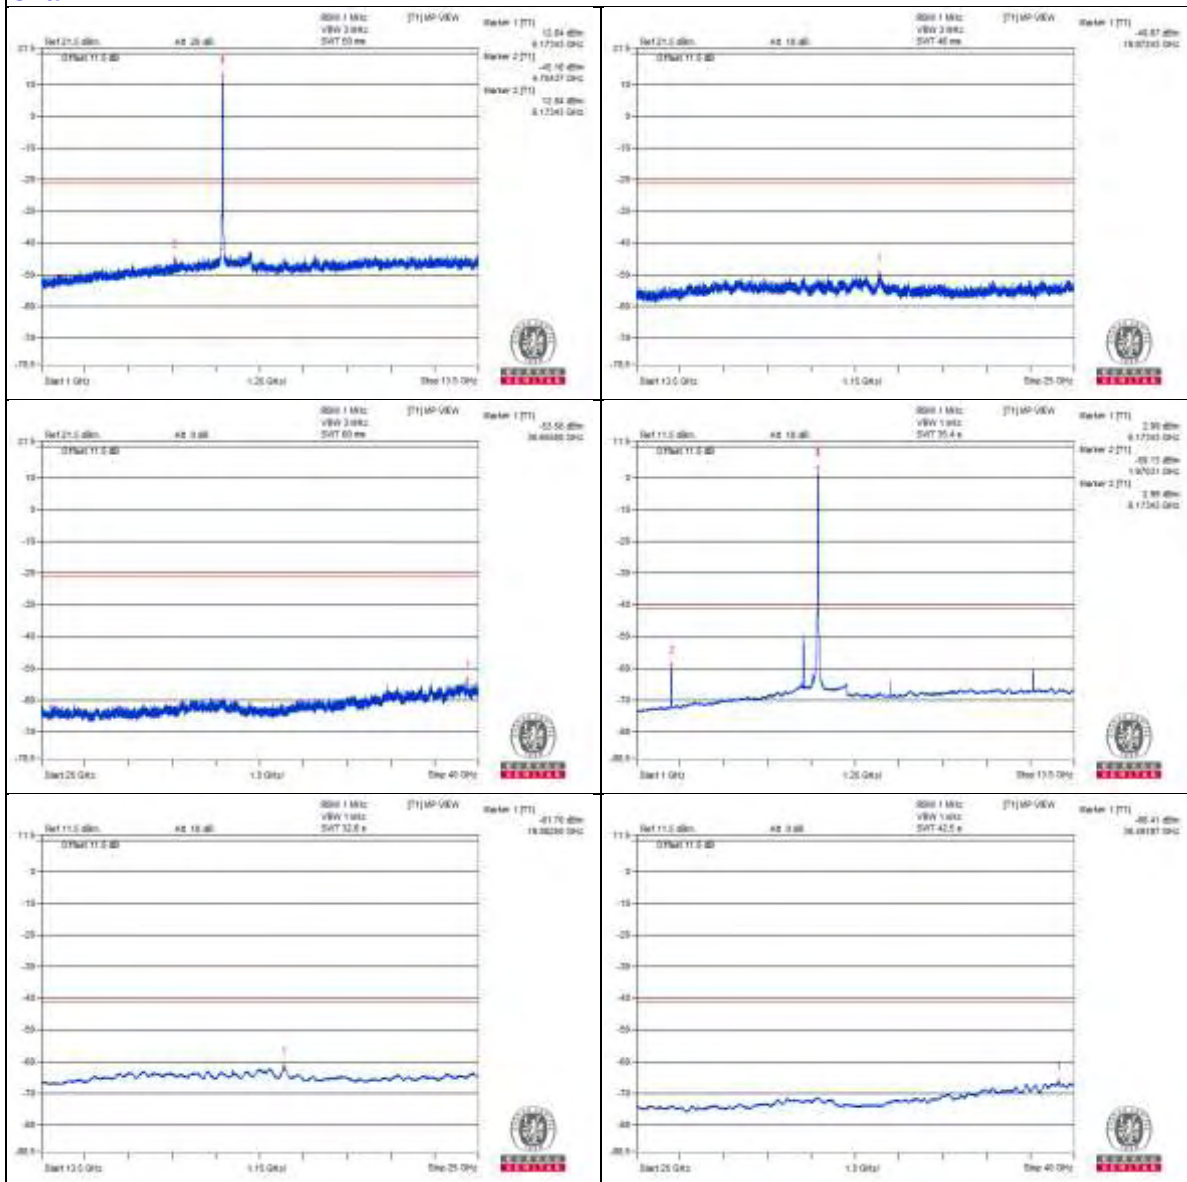

802.11a - Channel 93

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2207.81 PK	56.37	74	-17.63	-49.27	-51.05	8.17	-38.89
2	2209.37 AV	48.1	54	-5.9	-57.62	-59.21	8.17	-47.16
3	5481.25 PK	58.85	88.2	-29.35	-48.36	-46.93	8.17	-36.41
4	5481.25 AV	38.79	68.2	-29.41	-67.6	-67.71	8.17	-56.47
5	5759.37 PK	61.32	88.2	-26.88	-46.32	-44.18	8.17	-33.94
6	5759.37 AV	53.82	68.2	-14.38	-55.71	-50.83	8.17	-41.44
7	4276.56 PK	58.2	74	-15.8	-48.5	-48	8.17	-37.06
8	4276.56 AV	36.89	54	-17.11	-69.37	-69.73	8.17	-58.37
9	12825 PK	61.17	88.2	-27.03	-45.45	-45.09	8.17	-34.09
10	12831.25 AV	43.71	68.2	-24.49	-65.55	-61.03	8.17	-51.55
11	19245.68 PK	55.02	74	-18.98	-51.04	-51.83	8.17	-40.24
12	19248.56 AV	44.61	54	-9.39	-61.68	-61.98	8.17	-50.65

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

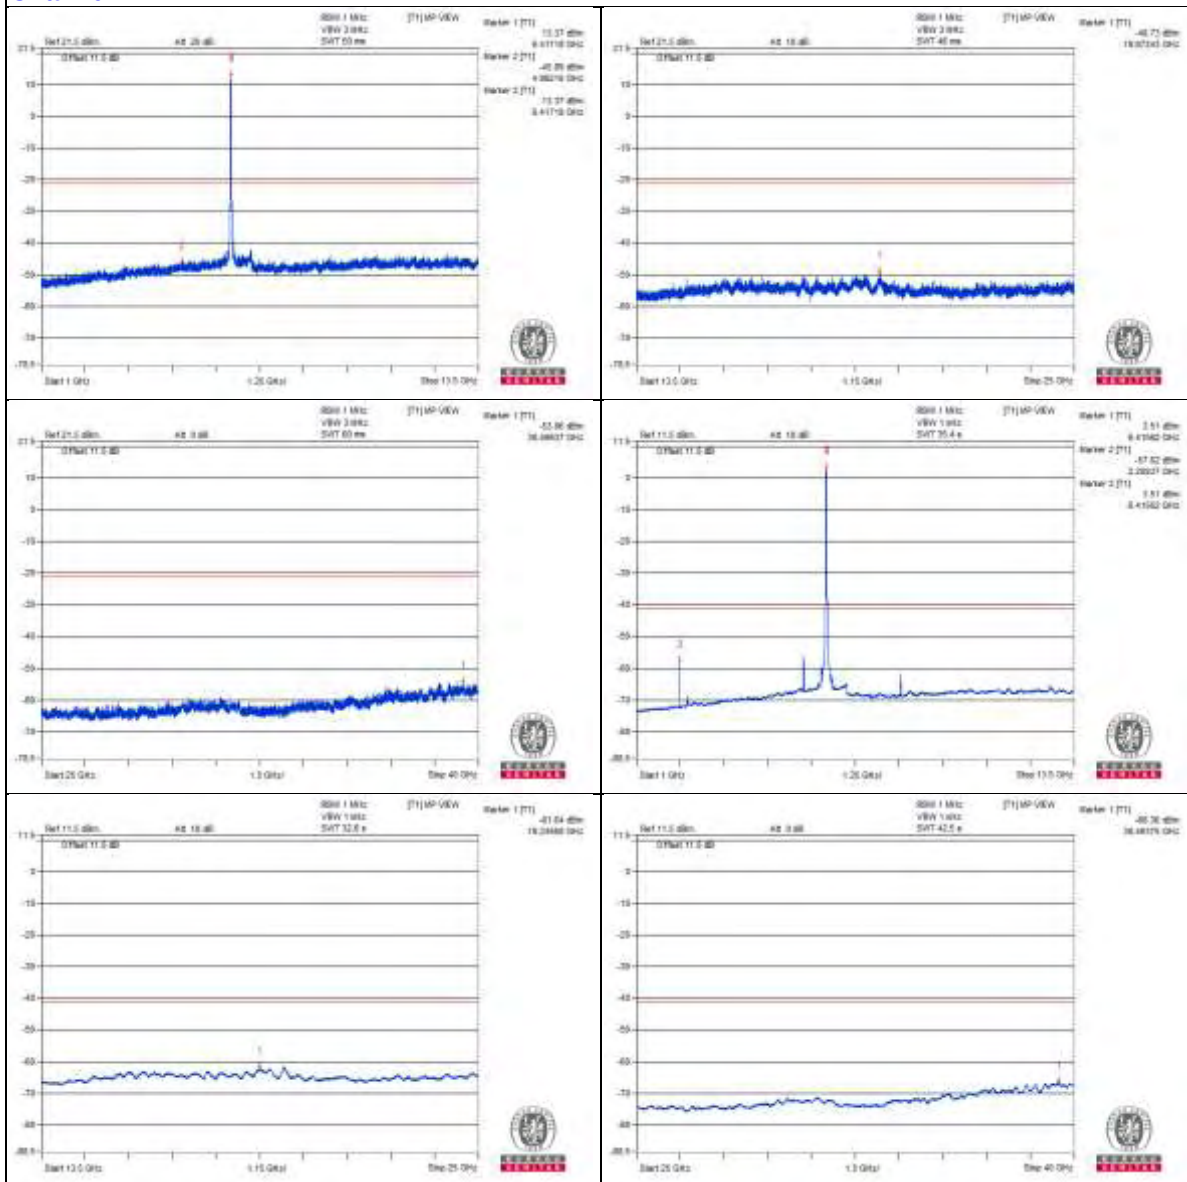

Chain 1

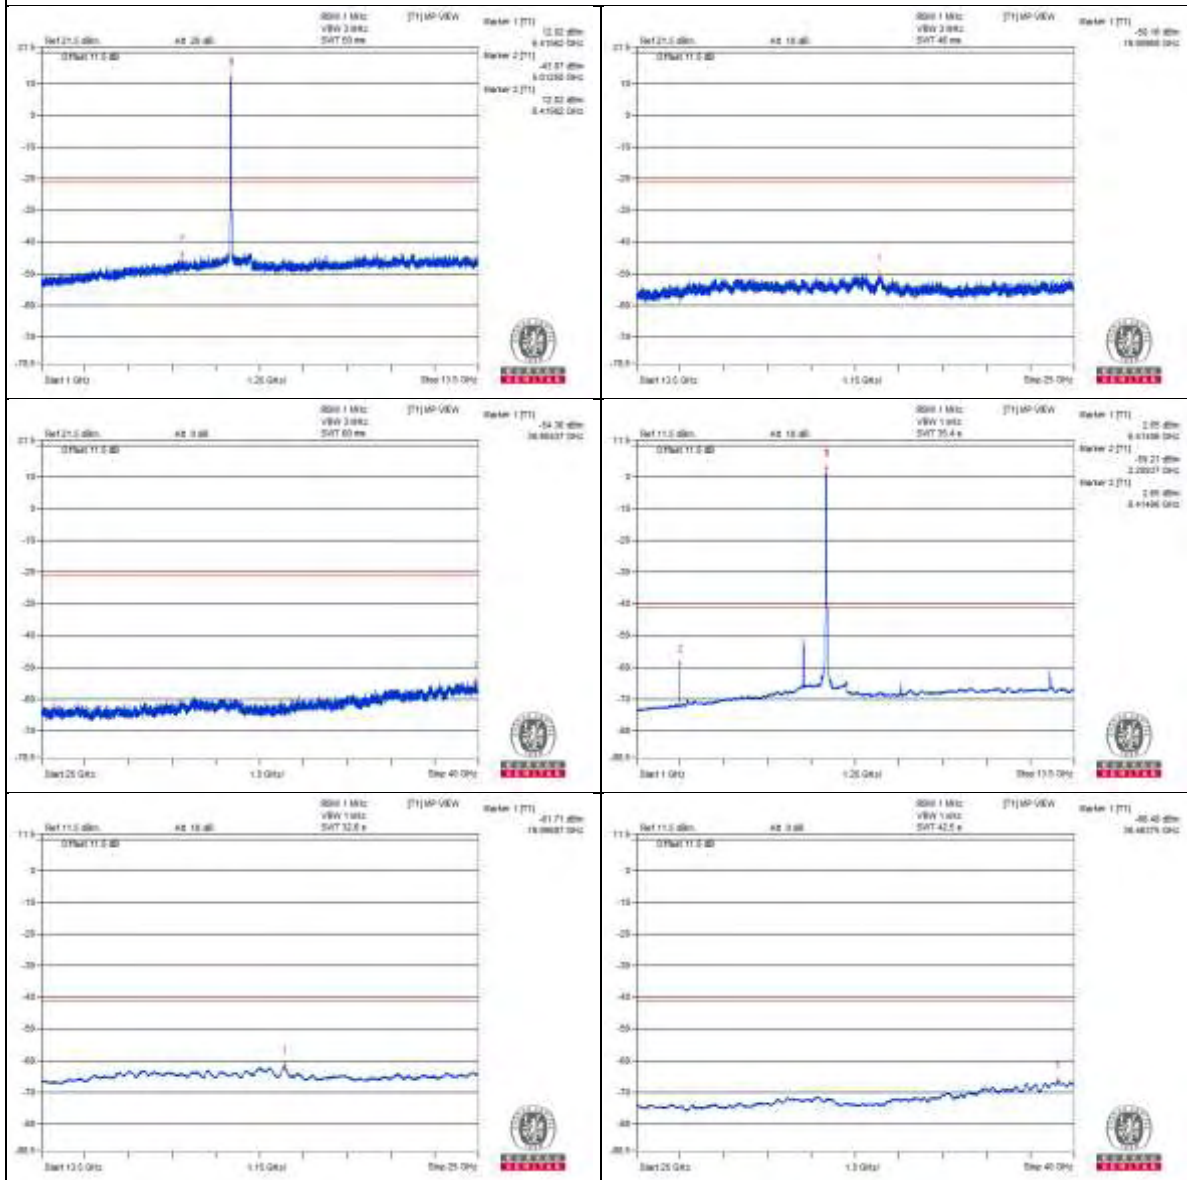

802.11a - Channel 117

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2331.25 PK	56.94	74	-17.06	-48.61	-50.62	8.17	-38.32
2	2329.68 AV	48.84	54	-5.16	-57.56	-57.64	8.17	-46.42
3	5479.68 PK	59.36	88.2	-28.84	-47.82	-46.44	8.17	-35.9
4	5487.5 AV	38.82	68.2	-29.38	-67.6	-67.65	8.17	-56.44
5	5759.37 PK	62.57	88.2	-25.63	-43.66	-44.09	8.17	-32.69
6	5759.37 AV	54.21	68.2	-13.99	-54.86	-50.6	8.17	-41.05
7	4353.12 PK	58.48	74	-15.52	-47.25	-48.8	8.17	-36.78
8	4356.25 AV	37.34	54	-16.66	-69.12	-69.09	8.17	-57.92
9	13070.31 PK	60.88	88.2	-27.32	-46.75	-44.63	8.17	-34.38
10	13070.31 AV	43.65	68.2	-24.55	-65.78	-61.03	8.17	-51.61
11	19603.62 PK	54.24	74	-19.76	-51.68	-52.8	8.17	-41.02
12	19609.37 AV	43	54	-11	-63.2	-63.69	8.17	-52.26

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

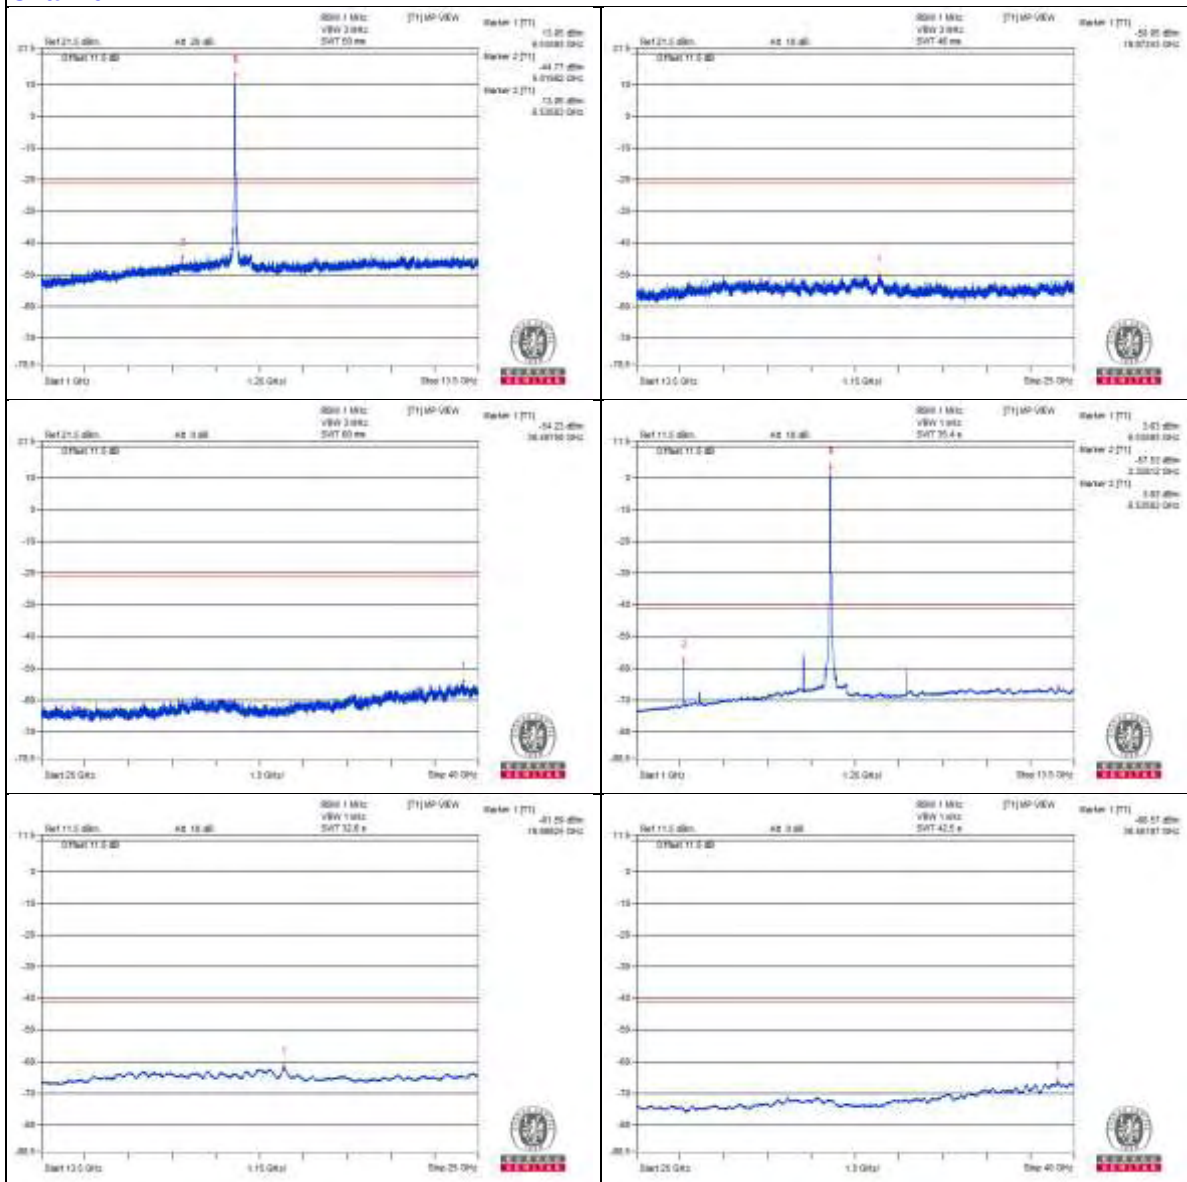

Chain 1

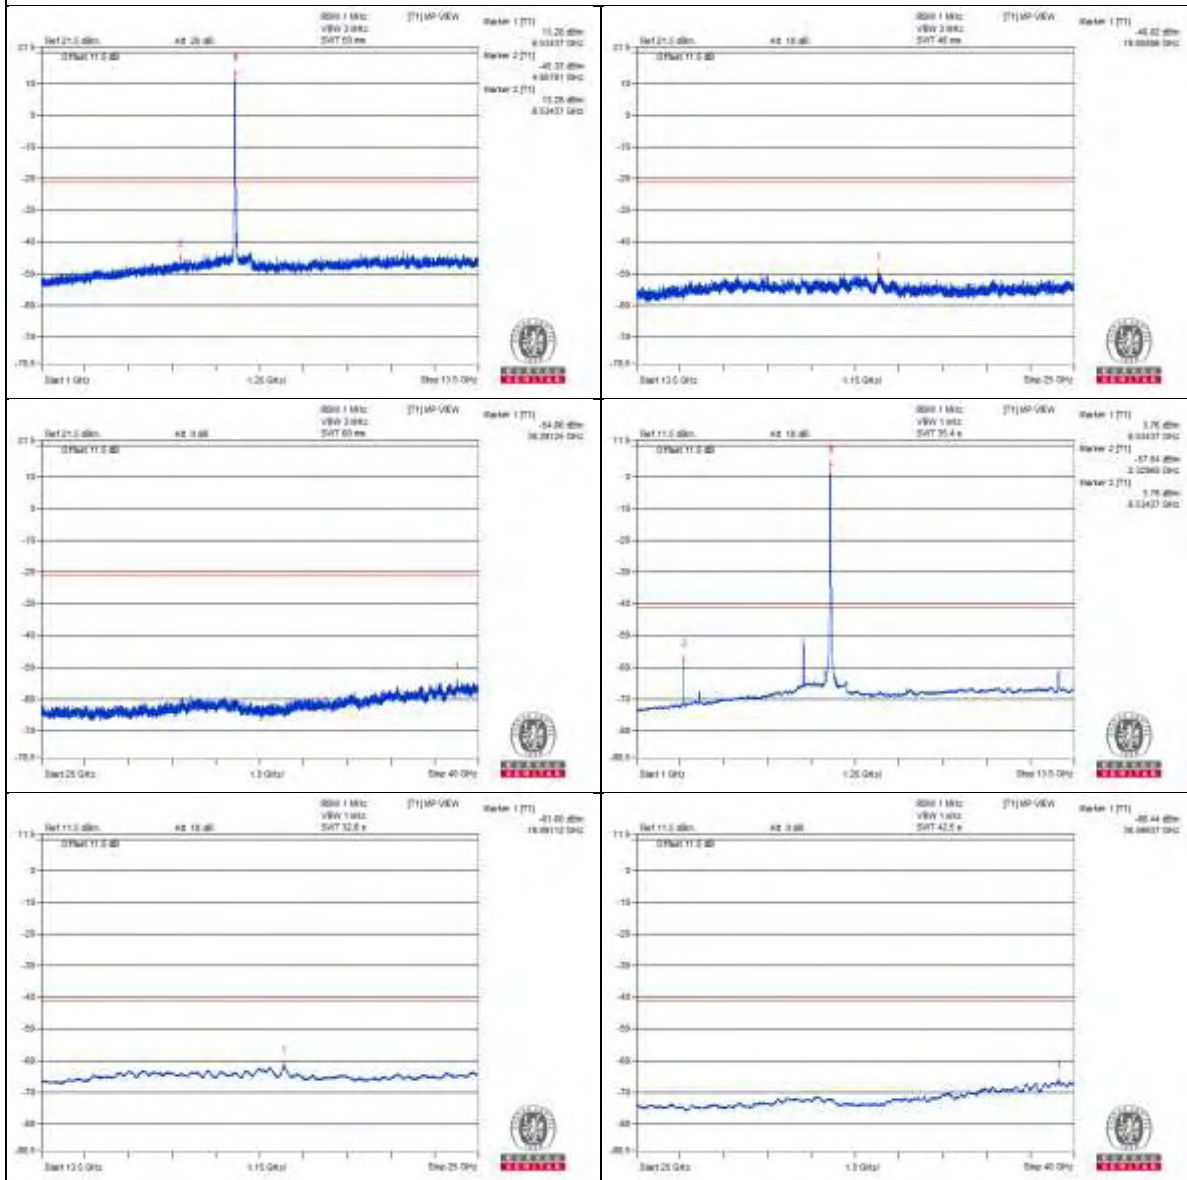

802.11a - Channel 149

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2489.06 PK	58.18	74	-15.82	-47	-50.05	8.17	-37.08
2	2489.06 AV	49.61	54	-4.39	-57.07	-56.61	8.17	-45.65
3	5487.5 PK	59.64	88.2	-28.56	-46.55	-47.07	8.17	-35.62
4	5481.25 AV	38.58	68.2	-29.62	-67.58	-68.15	8.17	-56.68
5	5759.37 PK	61.59	88.2	-26.61	-45.1	-44.61	8.17	-33.67
6	5759.37 AV	54.38	68.2	-13.82	-53.04	-51.26	8.17	-40.88
7	4462.5 PK	58.79	88.2	-29.41	-48.94	-46.65	8.17	-36.47
8	4462.5 AV	37.27	68.2	-30.93	-68.92	-69.44	8.17	-57.99
9	13387.5 PK	60.4	74	-13.6	-47.41	-45	8.17	-34.86
10	13390.62 AV	41.17	54	-12.83	-67.65	-63.74	8.17	-54.09
11	20085.18 PK	52.87	74	-21.13	-54.54	-52.78	8.17	-42.39
12	20080.87 AV	41.89	54	-12.11	-64.51	-64.59	8.17	-53.37

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

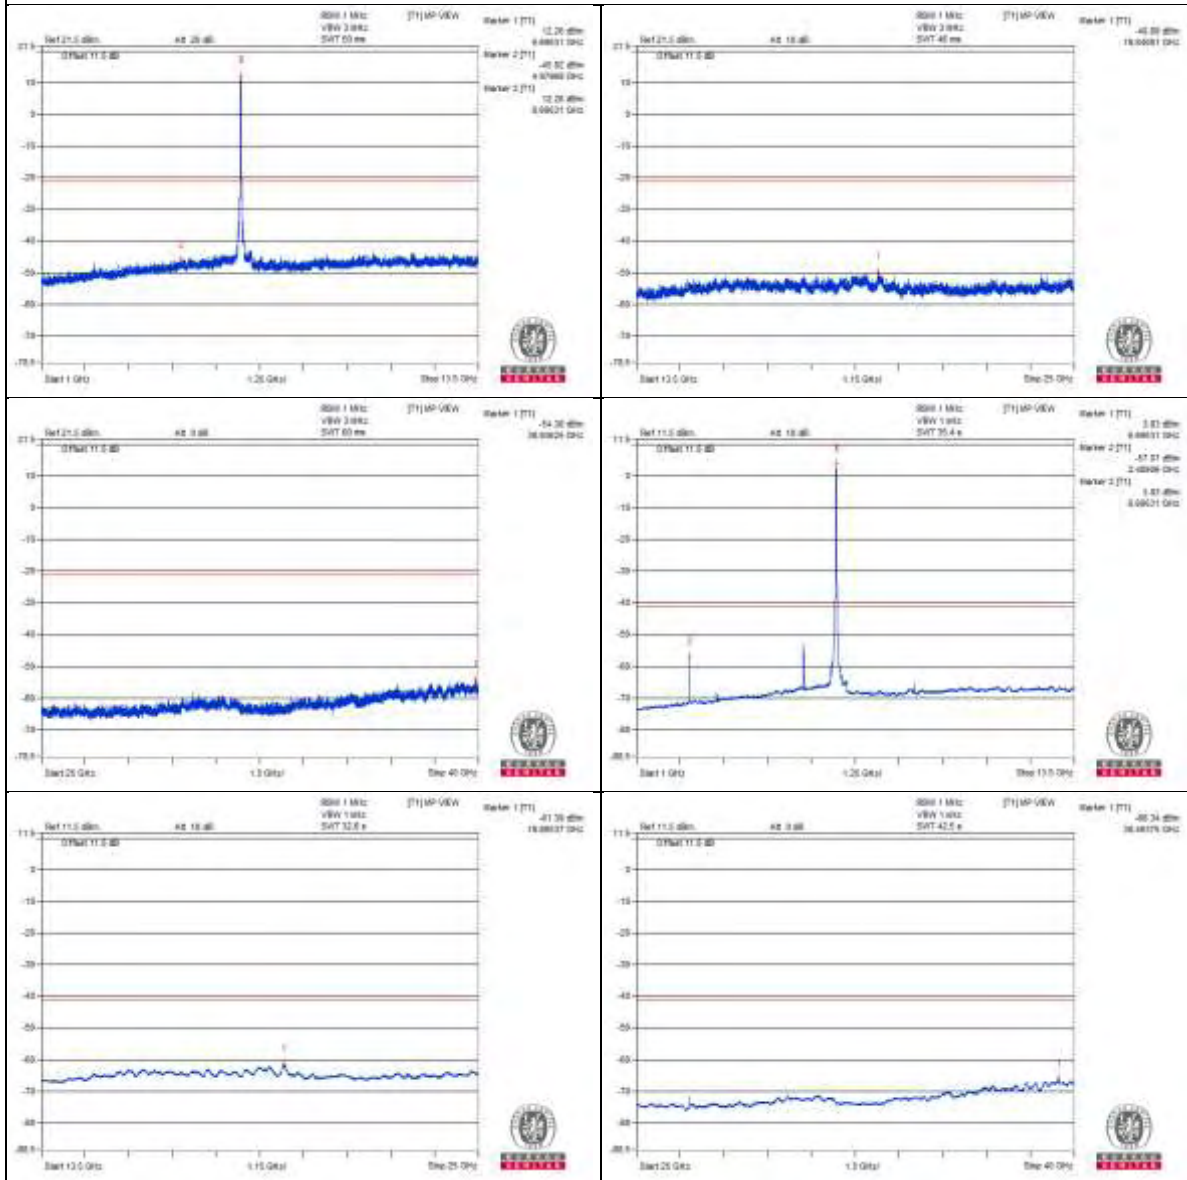

Chain 1

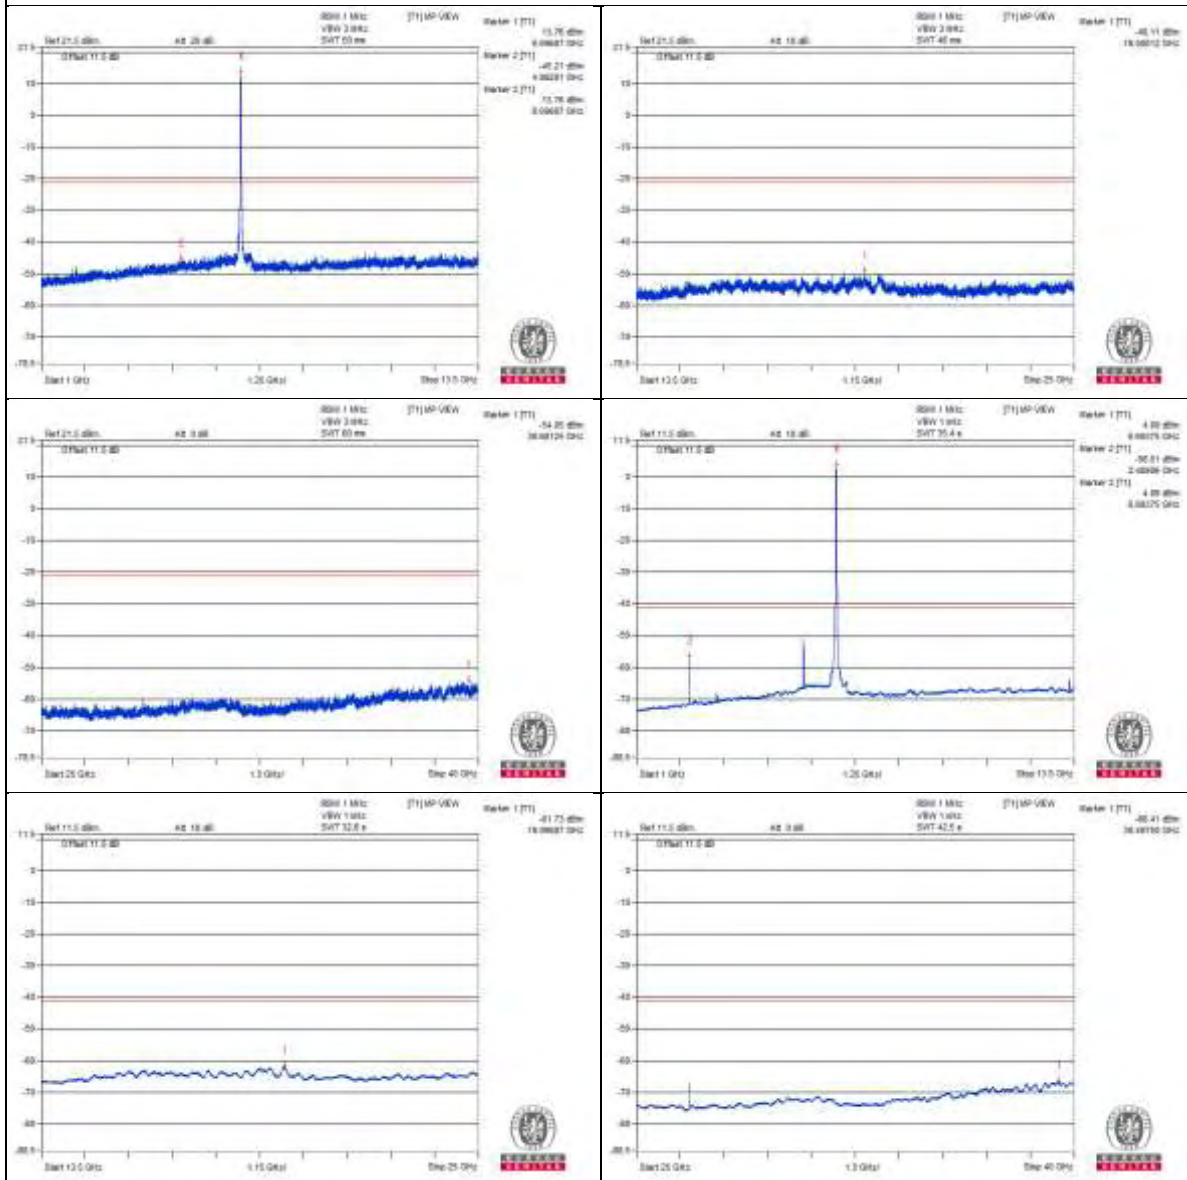

802.11a - Channel 181

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2651.56 PK	57.4	74	-16.6	-48.98	-49.1	8.17	-37.86
2	2650 AV	45.6	54	-8.4	-61.2	-60.51	8.17	-49.66
3	5484.37 PK	61.56	88.2	-26.64	-43.89	-46.16	8.17	-33.7
4	5484.37 AV	53.48	68.2	-14.72	-50.23	-61.98	8.17	-41.78
5	5759.37 PK	61.32	88.2	-26.88	-45.8	-44.53	8.17	-33.94
6	5759.37 AV	54.62	68.2	-13.58	-52.48	-51.24	8.17	-40.64
7	4565.62 PK	58.64	74	-15.36	-47.21	-48.49	8.17	-36.62
8	4575 AV	37.1	54	-16.9	-69.31	-69.38	8.17	-58.16
9	13709.87 PK	56.33	88.2	-31.87	-54.12	-48.06	8.17	-38.93
10	13709.87 AV	44.86	68.2	-23.34	-64.12	-59.99	8.17	-50.4
11	20561 PK	52.35	74	-21.65	-53.35	-54.98	8.17	-42.91
12	20566.75 AV	41.57	54	-12.43	-64.63	-65.13	8.17	-53.69


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

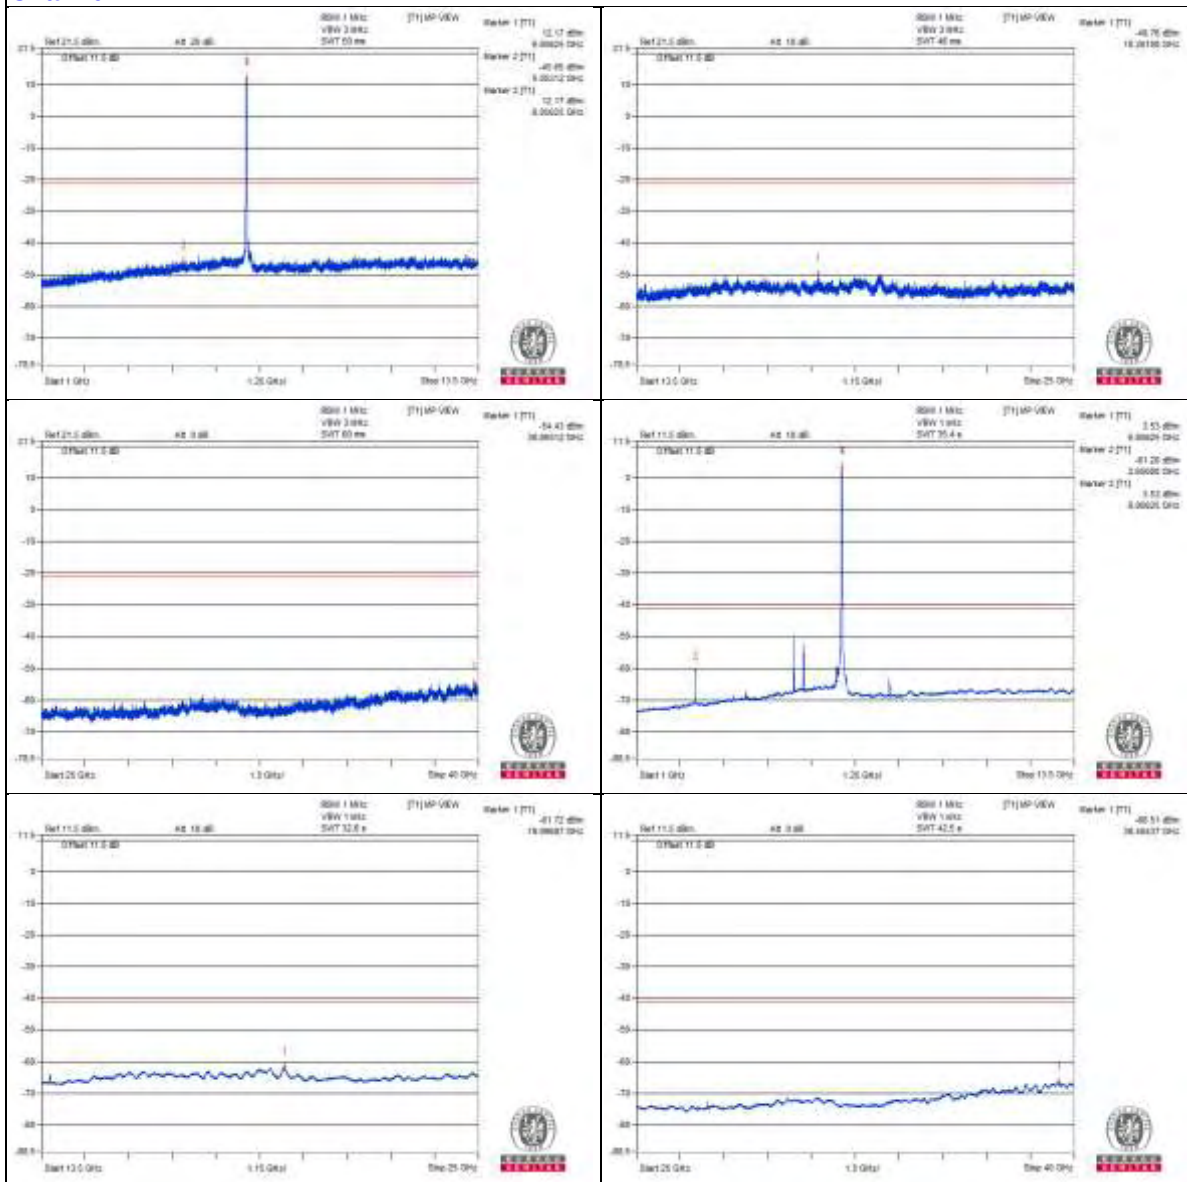



Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7130.8 PK	60.1	88.2	-28.1	-47.53	-45.41	8.17	-35.16
2	7201.9 AV	47.02	68.2	-21.18	-59.43	-59.42	8.17	-48.24


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

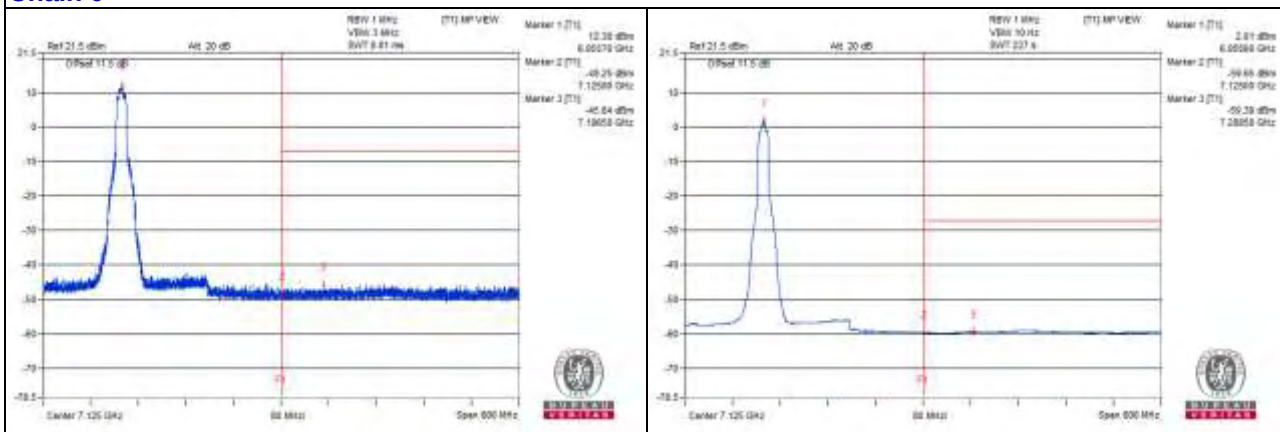

Chain 1

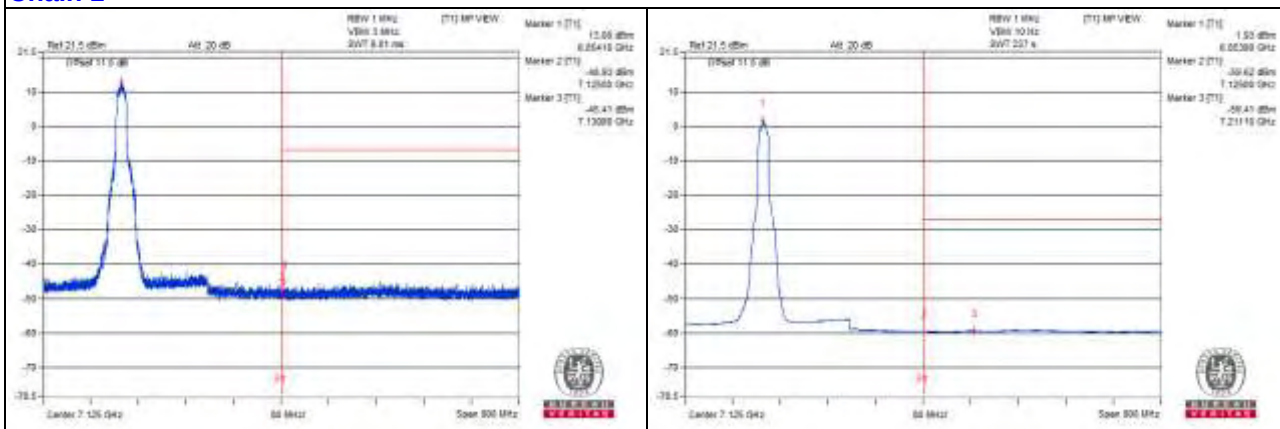

802.11ax (HE20) - Channel 2

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	11868.75 PK	60.57	74	-13.43	-46.19	-45.57	8.17	-34.69
2	11873.43 AV	38.88	54	-15.12	-67.57	-67.56	8.17	-56.38
3	17813.93 PK	52.96	74	-21.04	-53.92	-53.08	8.17	-42.3
4	17811.06 AV	42.32	54	-11.68	-63.97	-64.28	8.17	-52.94

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

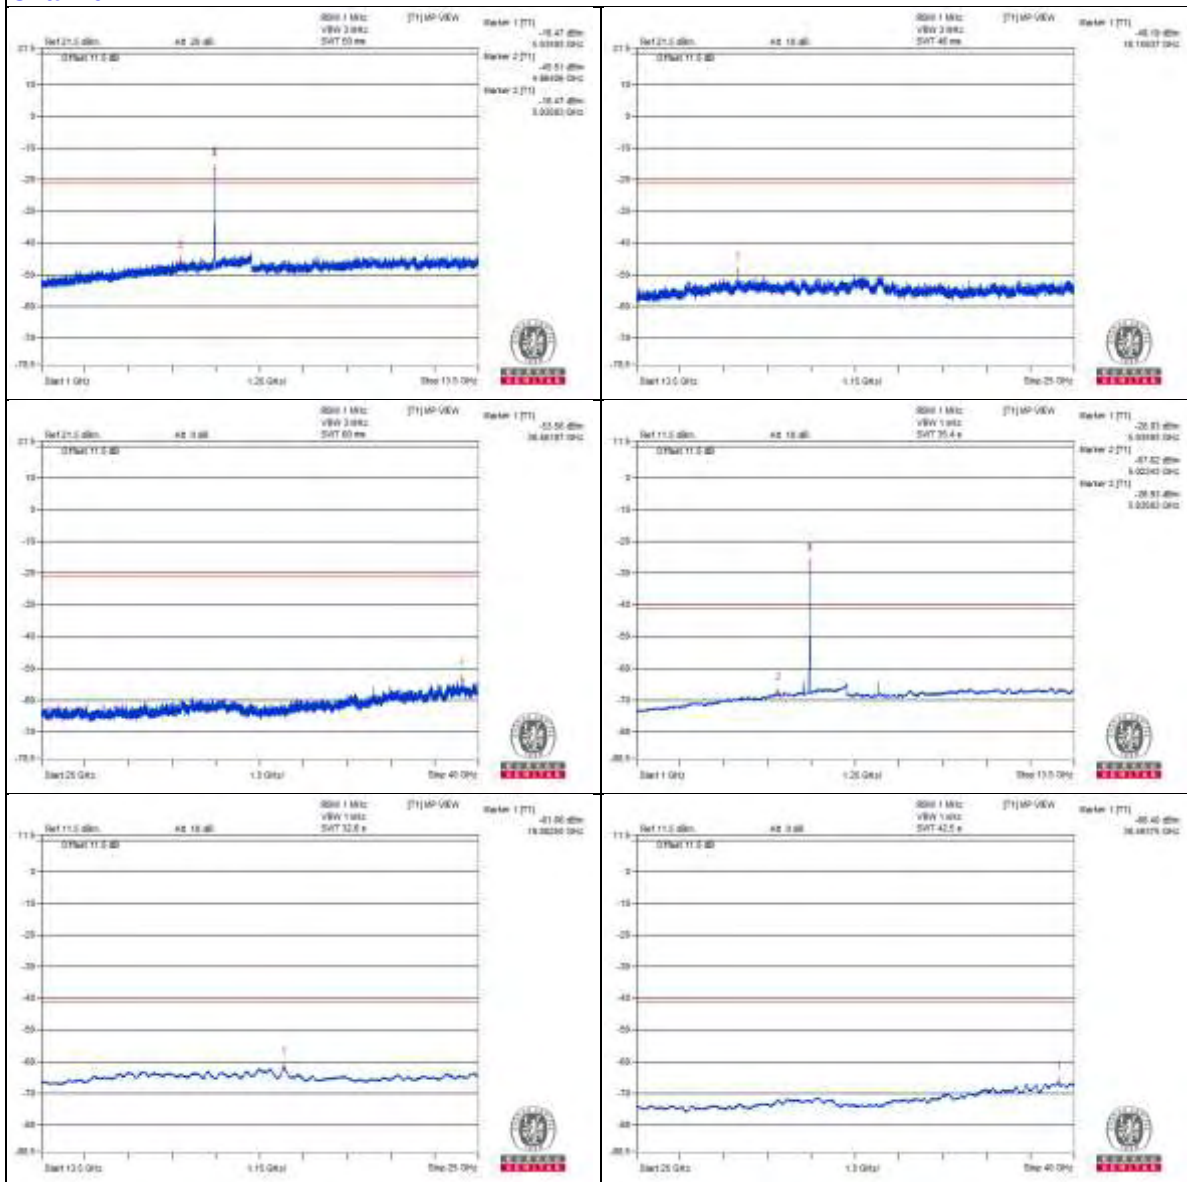

Chain 1

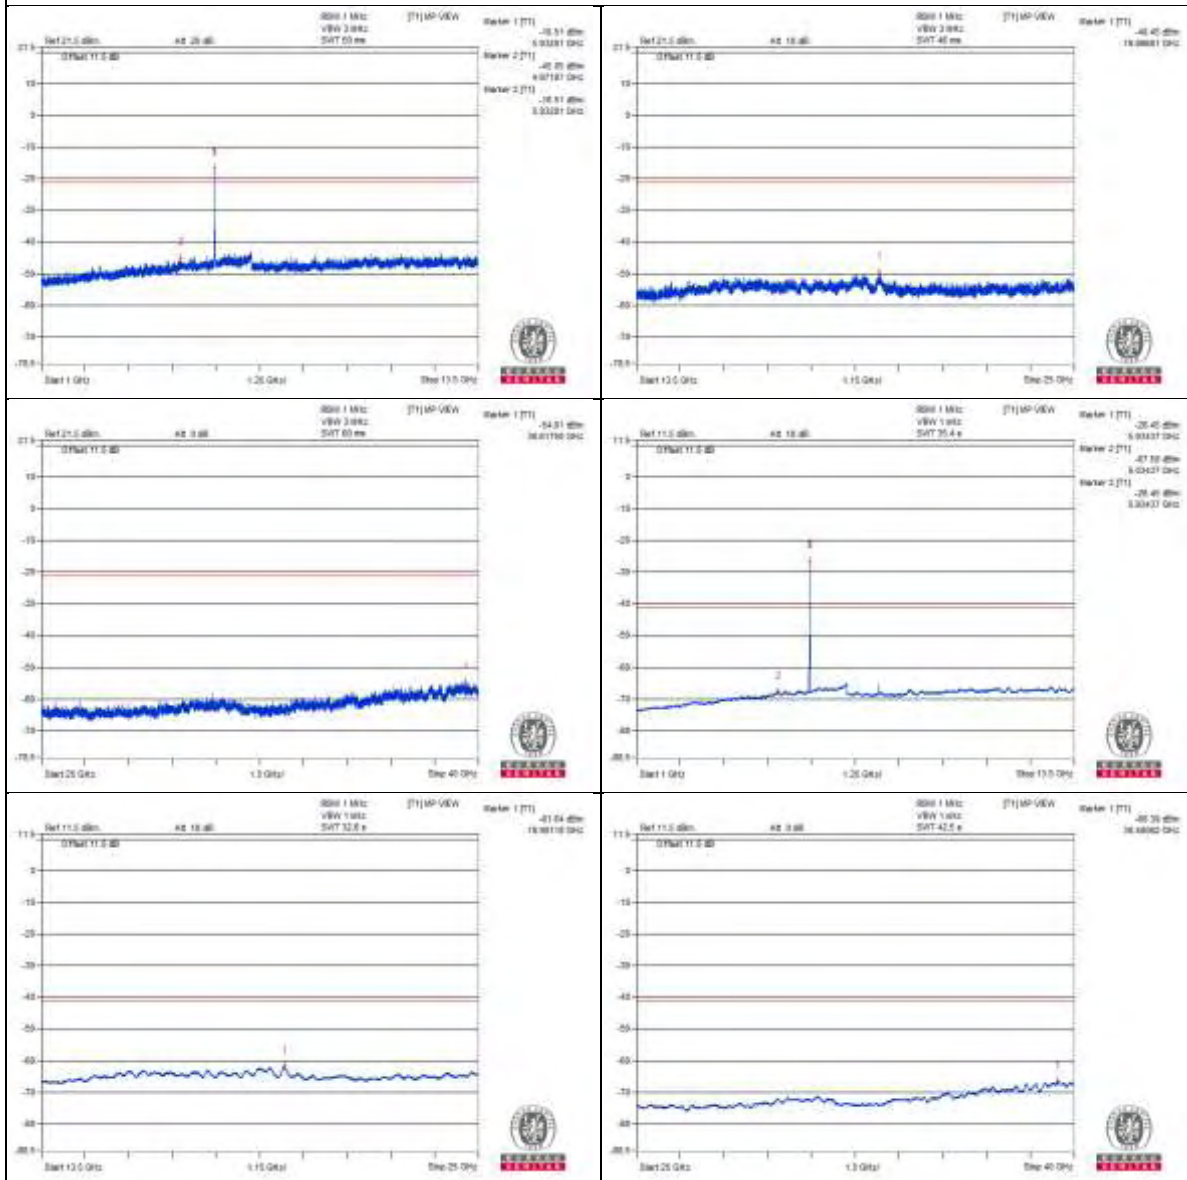

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5924.97 PK	81.98	88.2	-6.22	-24.07	-24.85	8.15	-13.28
2	5925 AV	71.52	68.2	*3.32	-34.58	-35.24	8.15	-23.74

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

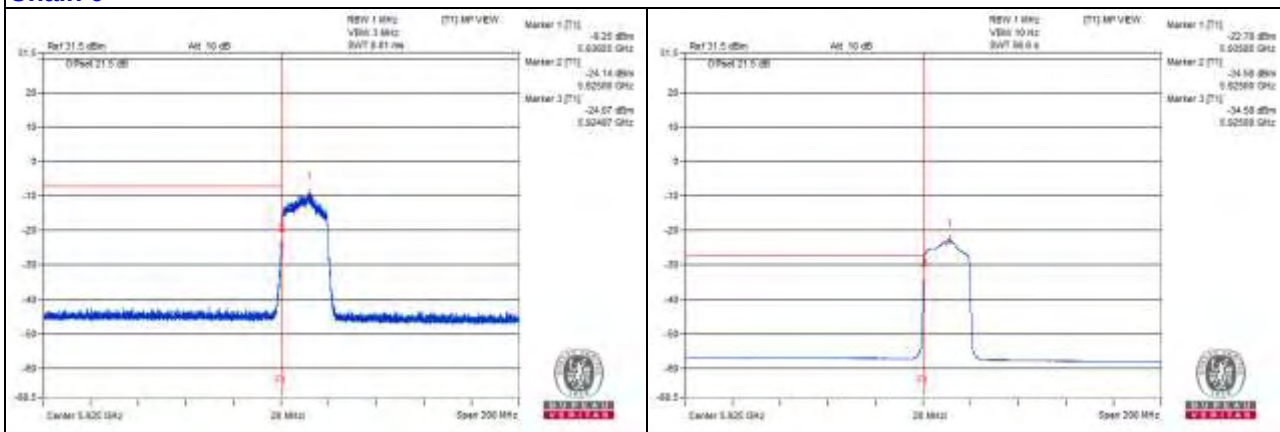

Chain 1

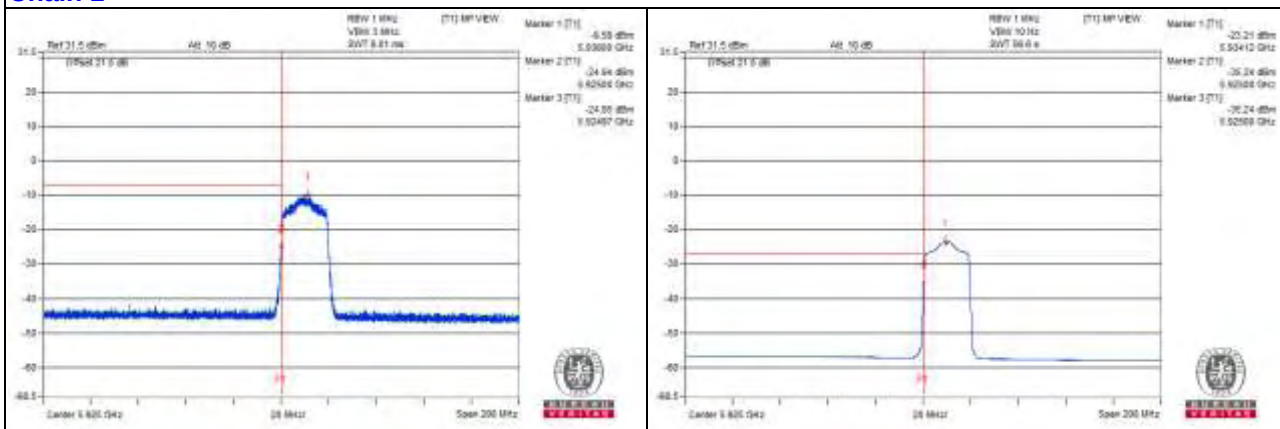

802.11ax (HE20) - Channel 1

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1754.68 PK	55.52	74	-18.48	-51.57	-50.36	8.17	-39.74
2	1748.43 AV	46.87	54	-7.13	-60.19	-59.03	8.17	-48.39
3	5481.25 PK	59.16	88.2	-29.04	-47.83	-46.8	8.17	-36.1
4	5479.68 AV	39.63	68.2	-28.57	-66.29	-67.4	8.17	-55.63
5	5759.37 PK	61.96	88.2	-26.24	-44.06	-44.94	8.17	-33.3
6	5759.37 AV	55.22	68.2	-12.98	-51.74	-50.75	8.17	-40.04
7	3975 PK	58.24	74	-15.76	-49.3	-47.32	8.17	-37.02
8	3973.43 AV	37.14	54	-16.86	-69.3	-69.3	8.17	-58.12
9	11909.37 PK	60.85	74	-13.15	-46.2	-45.05	8.17	-34.41
10	11909.37 AV	42.65	54	-11.35	-66.17	-62.26	8.17	-52.61
11	17861.37 PK	54.61	74	-19.39	-51.16	-52.62	8.17	-40.65
12	17865.68 AV	43.57	54	-10.43	-62.87	-62.87	8.17	-51.69

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

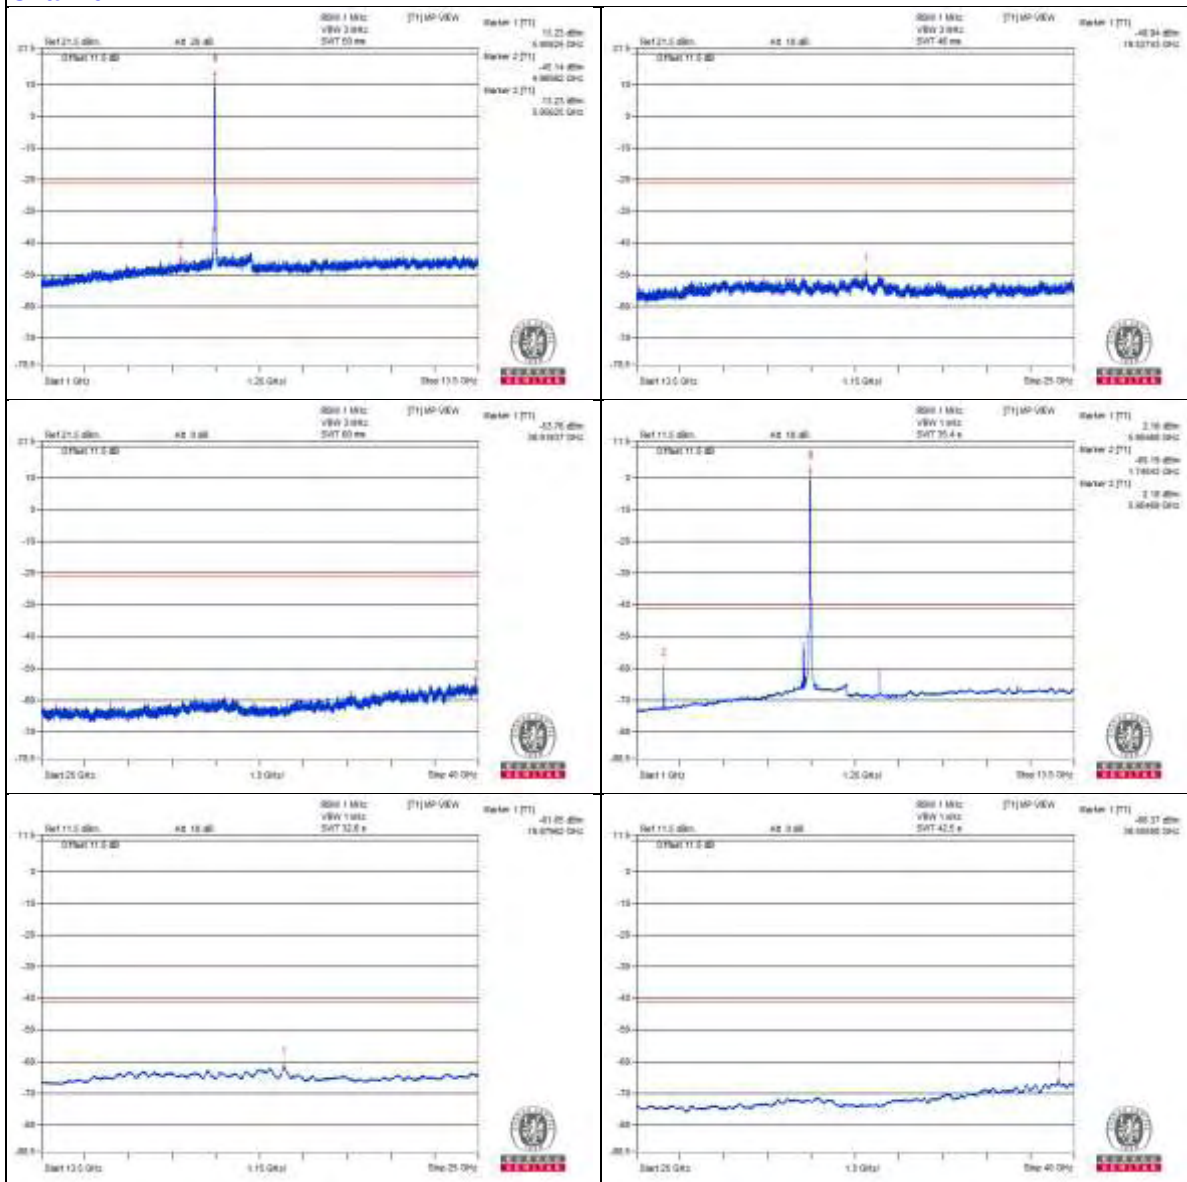

Chain 1

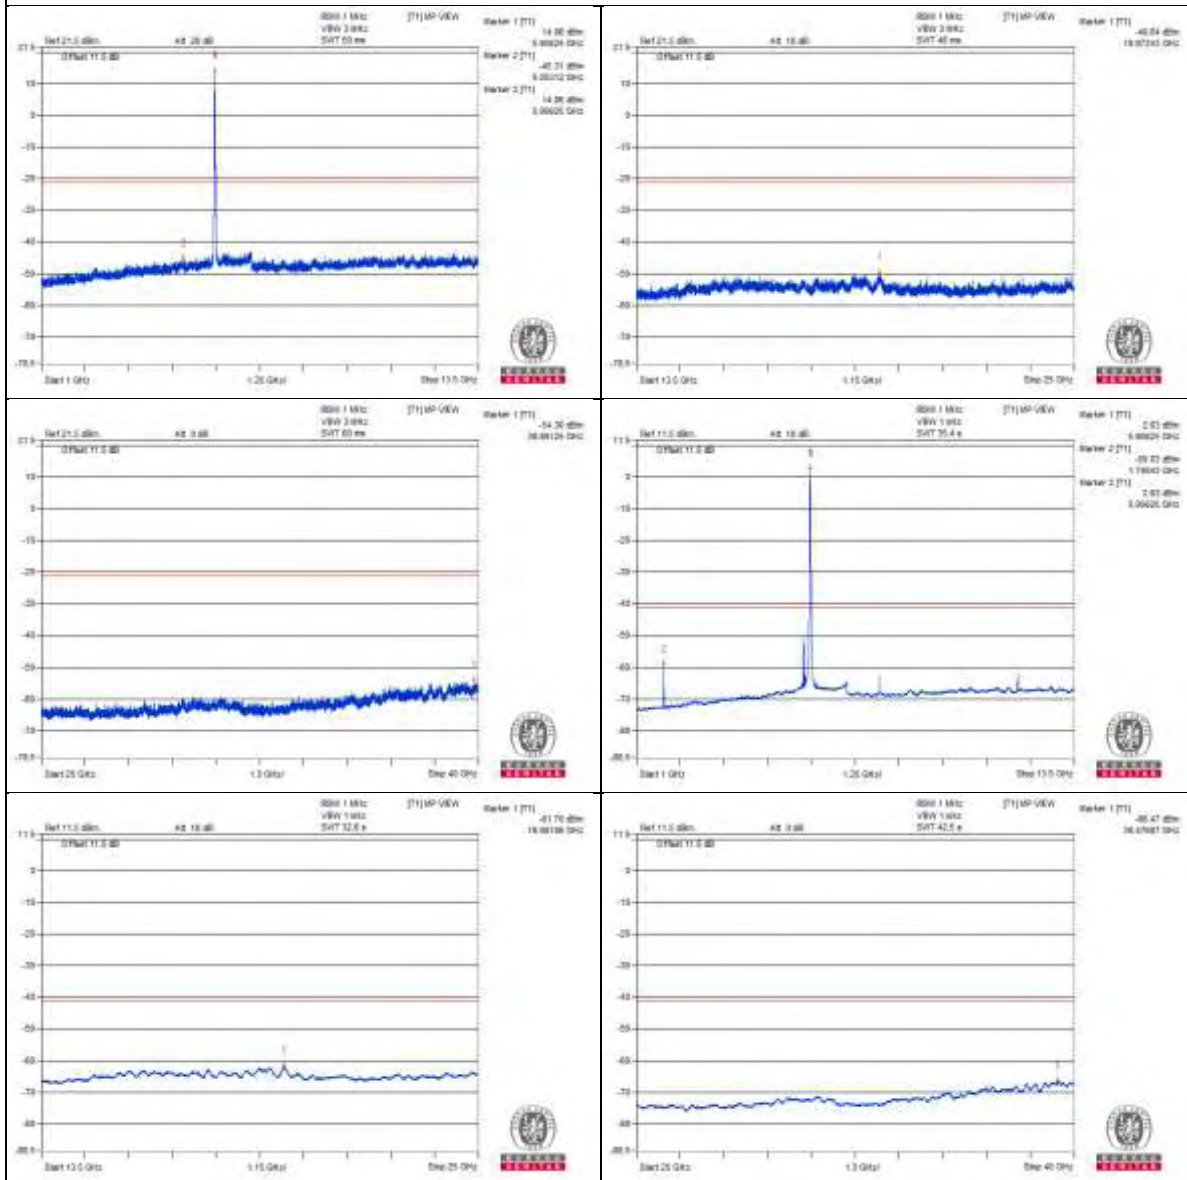

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5924.57 PK	75.46	88.2	-12.74	-33.81	-29.26	8.15	-19.8
2	5925 AV	60.73	68.2	-7.47	-47.83	-44.27	8.15	-34.53


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

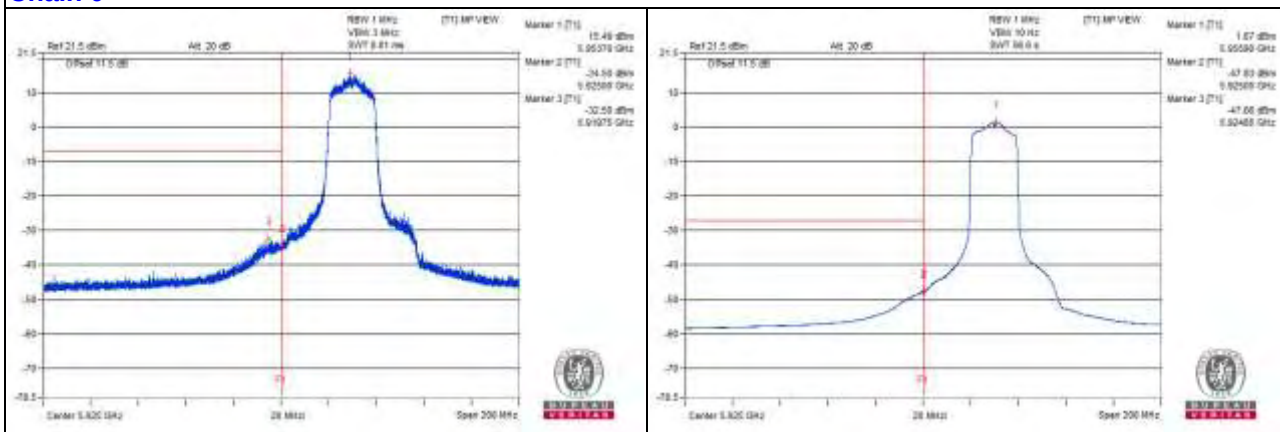

Chain 1

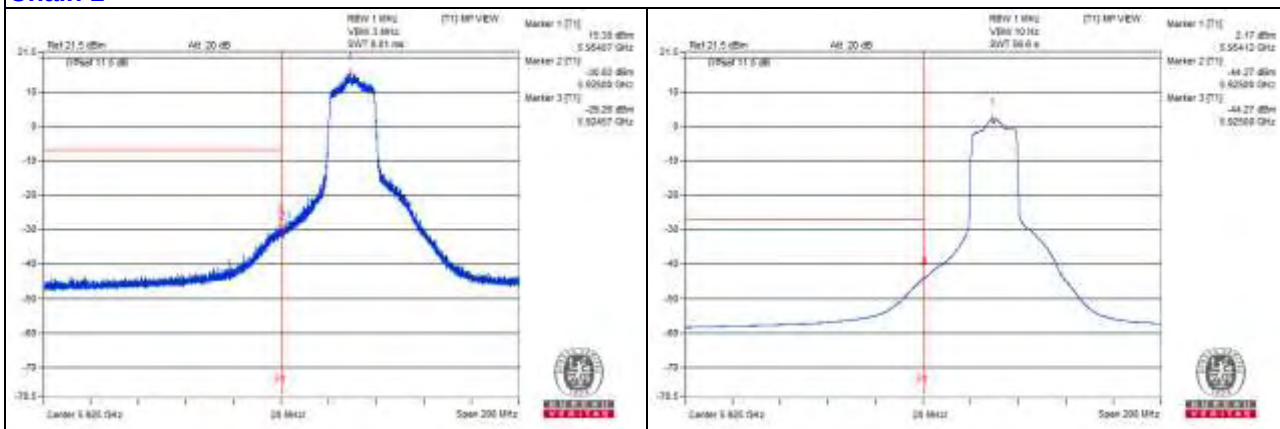

802.11ax (HE20) - Channel 45

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1970.31 PK	56.58	74	-17.42	-48.55	-51.75	8.17	-38.68
2	1968.75 AV	47.29	54	-6.71	-58.91	-59.41	8.17	-47.97
3	5487.5 PK	59.55	88.2	-28.65	-48.75	-45.59	8.17	-35.71
4	5485.93 AV	39.59	68.2	-28.61	-66.5	-67.24	8.17	-55.67
5	5759.37 PK	63.31	88.2	-24.89	-43.28	-42.98	8.17	-31.95
6	5759.37 AV	56.99	68.2	-11.21	-48.95	-50.02	8.17	-38.27
7	4115.62 PK	58.75	74	-15.25	-46.55	-49.25	8.17	-36.51
8	4115.62 AV	37.2	54	-16.8	-69.06	-69.42	8.17	-58.06
9	12353.12 PK	61.69	74	-12.31	-44.02	-45.62	8.17	-33.57
10	12350 AV	44.54	54	-9.46	-63.21	-60.9	8.17	-50.72
11	18528.37 PK	55.38	74	-18.62	-51.19	-50.93	8.17	-39.88
12	18521.18 AV	43.67	54	-10.33	-62.84	-62.71	8.17	-51.59

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

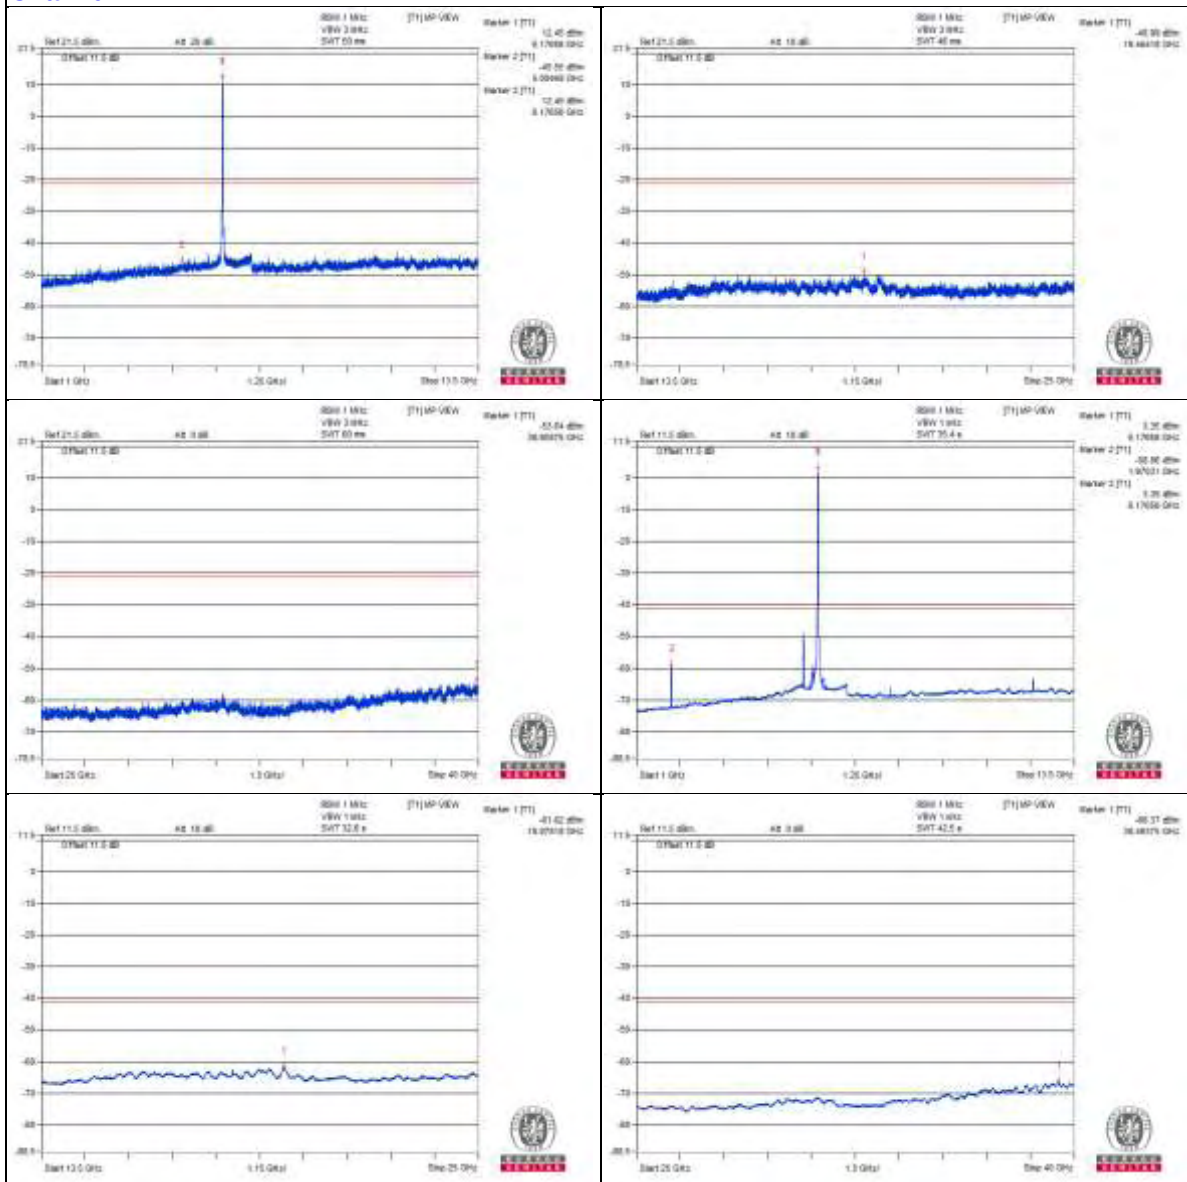

Chain 1

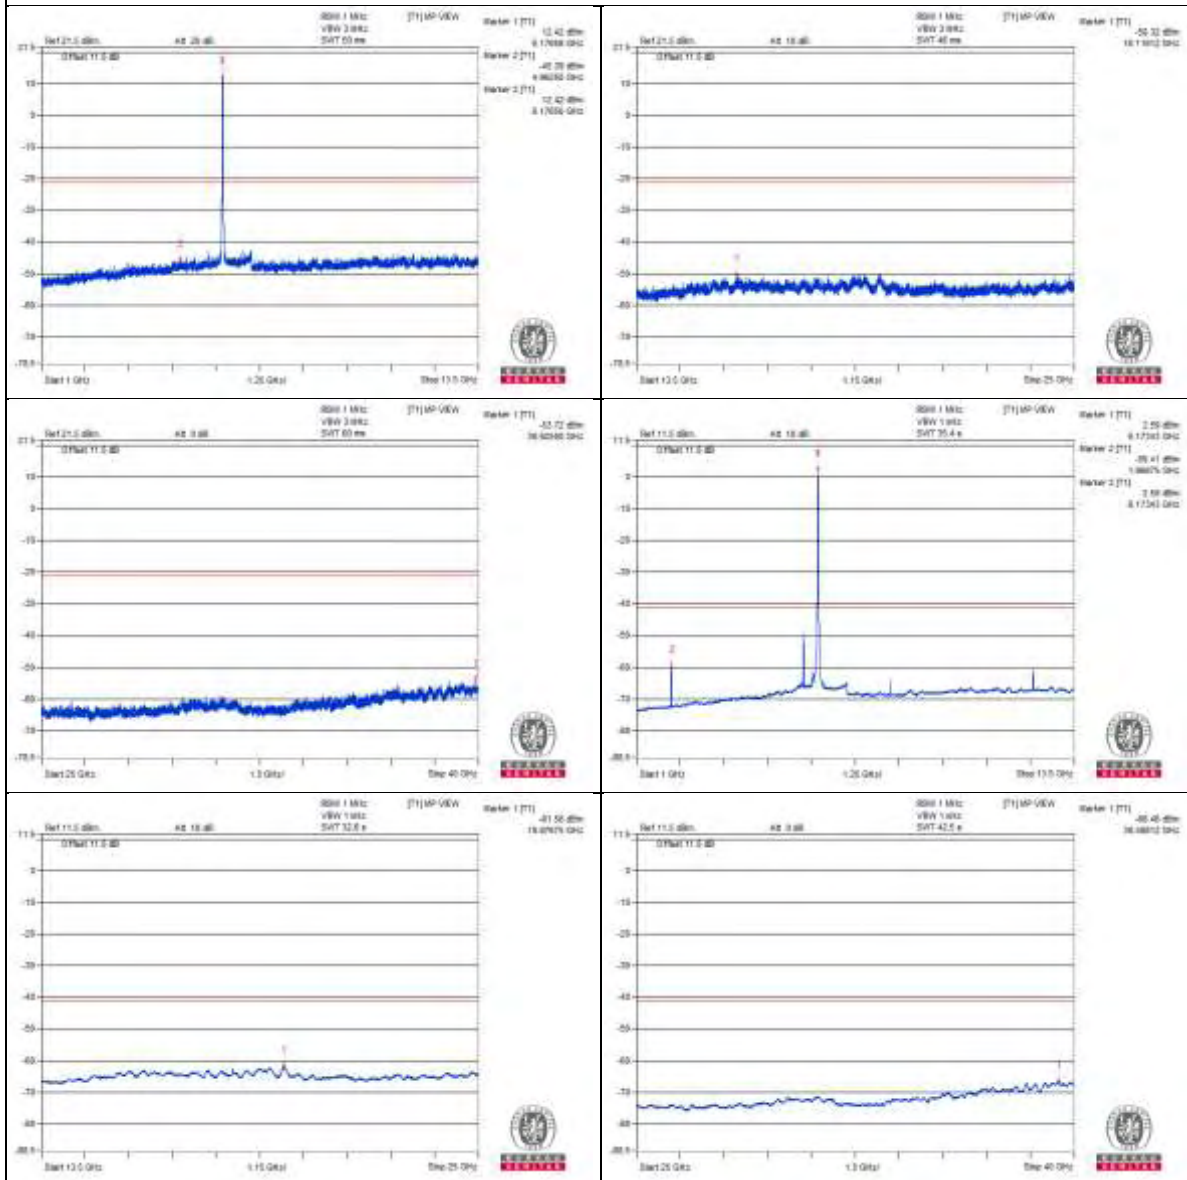

802.11ax (HE20) – Channel 93

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2209.37 PK	55.9	74	-18.1	-50.24	-50.87	8.17	-39.36
2	2209.37 AV	47.43	54	-6.57	-58.31	-59.84	8.17	-47.83
3	5487.5 PK	59.08	88.2	-29.12	-47.32	-47.41	8.17	-36.18
4	5487.5 AV	38.84	68.2	-29.36	-67.5	-67.71	8.17	-56.42
5	5759.37 PK	61.14	88.2	-27.06	-45.49	-45.12	8.17	-34.12
6	5759.37 AV	53.81	68.2	-14.39	-55.53	-50.91	8.17	-41.45
7	4275 PK	58.22	74	-15.78	-47.54	-49.03	8.17	-37.04
8	4276.56 AV	36.9	54	-17.1	-69.4	-69.68	8.17	-58.36
9	12834.37 PK	61.09	88.2	-27.11	-46.29	-44.57	8.17	-34.17
10	12831.25 AV	43.15	68.2	-25.05	-65.63	-61.78	8.17	-52.11
11	19242.81 PK	55.12	74	-18.88	-51.49	-51.16	8.17	-40.14
12	19242.81 AV	44.71	54	-9.29	-61.59	-61.87	8.17	-50.55

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

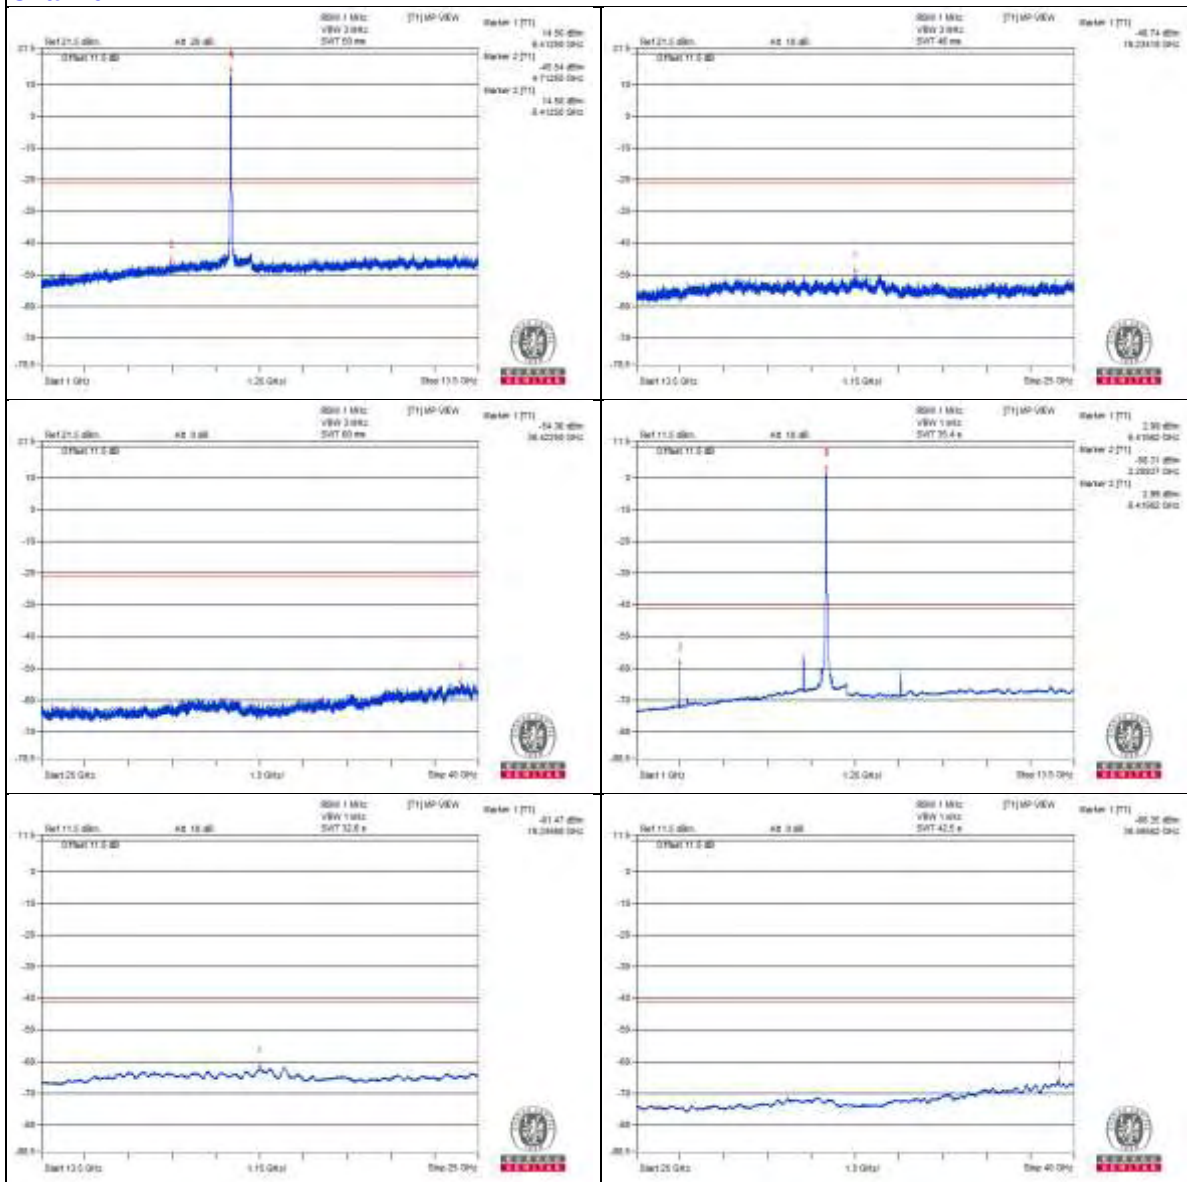

Chain 1

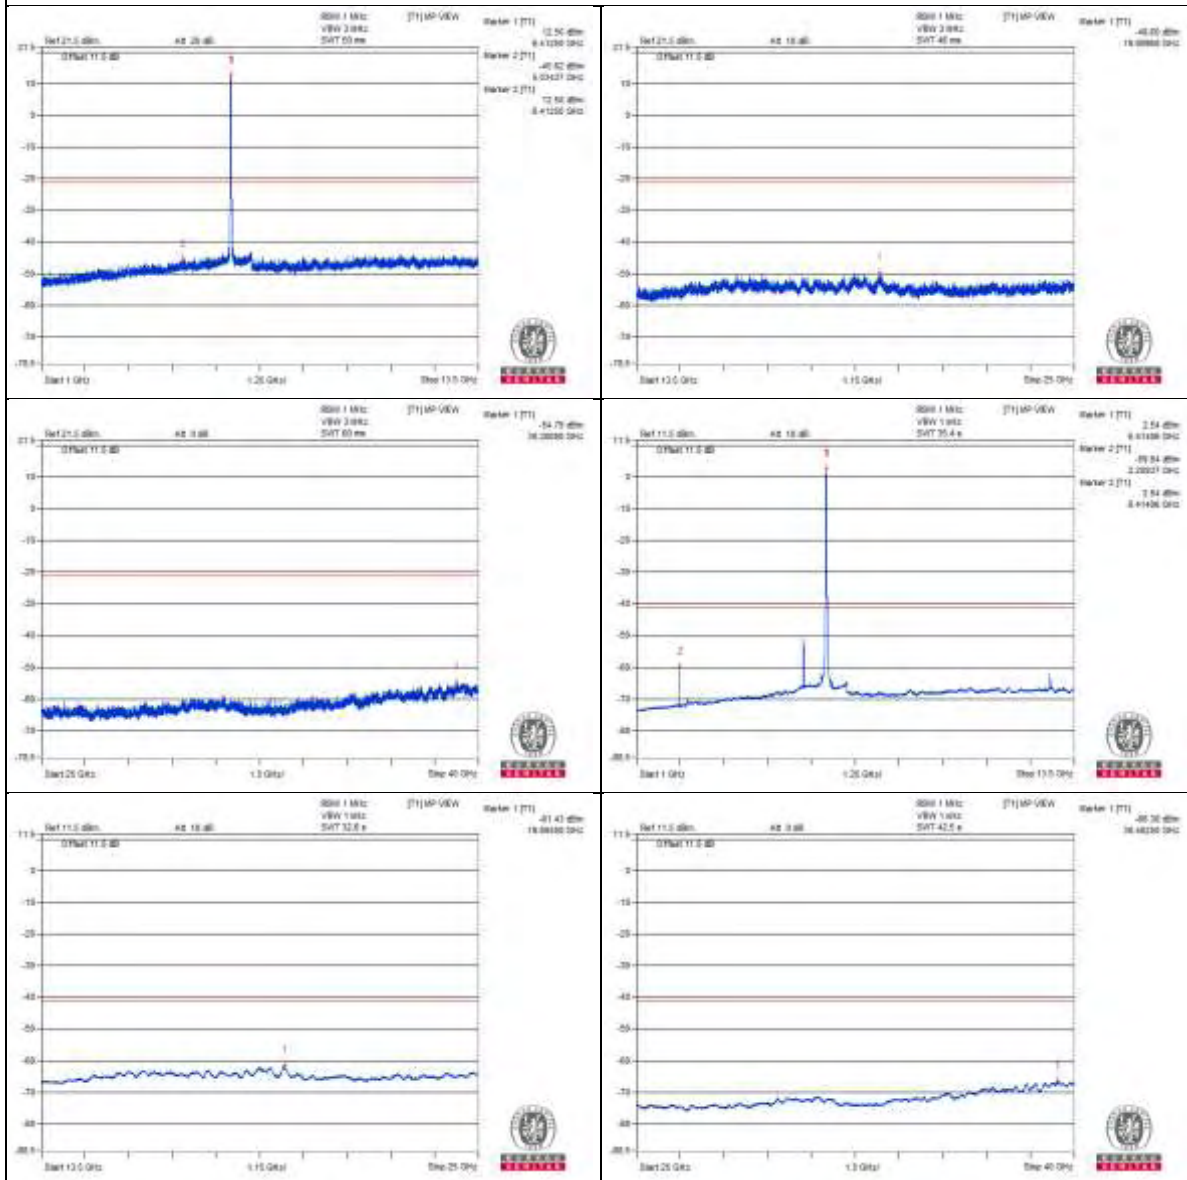

802.11ax (HE20) - Channel 117

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2328.12 PK	57.25	74	-16.75	-48.03	-50.78	8.17	-38.01
2	2329.68 AV	48.29	54	-5.71	-58.33	-57.98	8.17	-46.97
3	5485.93 PK	58.83	88.2	-29.37	-48.63	-46.79	8.17	-36.43
4	5484.37 AV	38.73	68.2	-29.47	-67.73	-67.7	8.17	-56.53
5	5759.37 PK	61.22	88.2	-26.98	-46.02	-44.55	8.17	-34.04
6	5759.37 AV	54.32	68.2	-13.88	-54.68	-50.52	8.17	-40.94
7	4360.93 PK	58.83	74	-15.17	-47.41	-47.81	8.17	-36.43
8	4354.68 AV	37.25	54	-16.75	-69.23	-69.16	8.17	-58.01
9	13068.75 PK	61.61	88.2	-26.59	-45.42	-44.32	8.17	-33.65
10	13070.31 AV	43.3	68.2	-24.9	-65.75	-61.52	8.17	-51.96
11	19600.75 PK	53.98	74	-20.02	-53.76	-51.46	8.17	-41.28
12	19602.18 AV	42.86	54	-11.14	-63.38	-63.8	8.17	-52.4

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

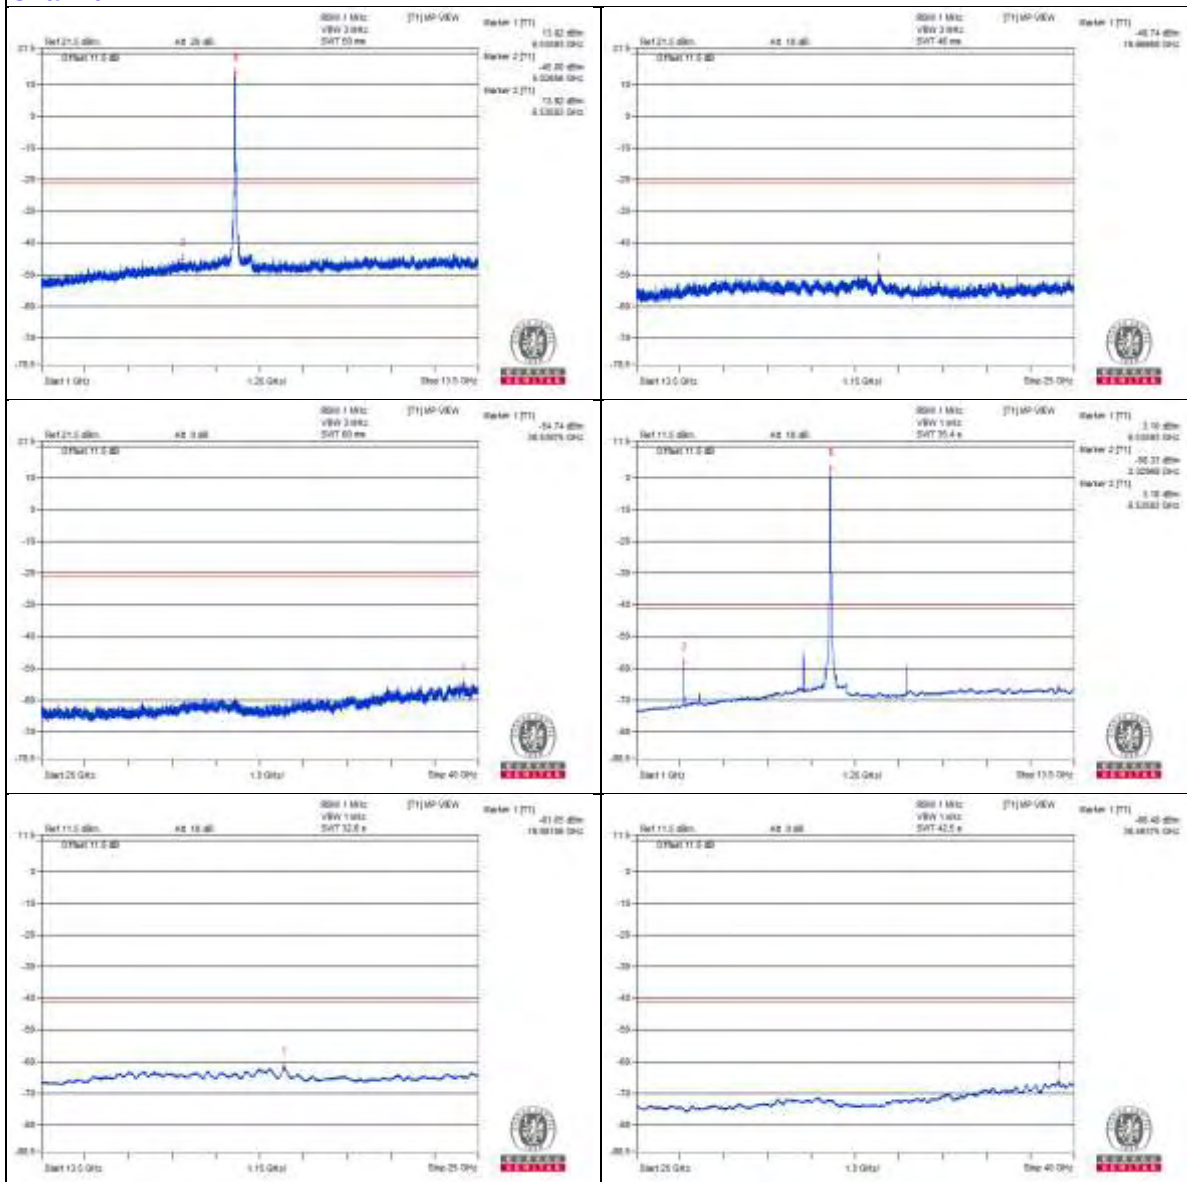

Chain 1

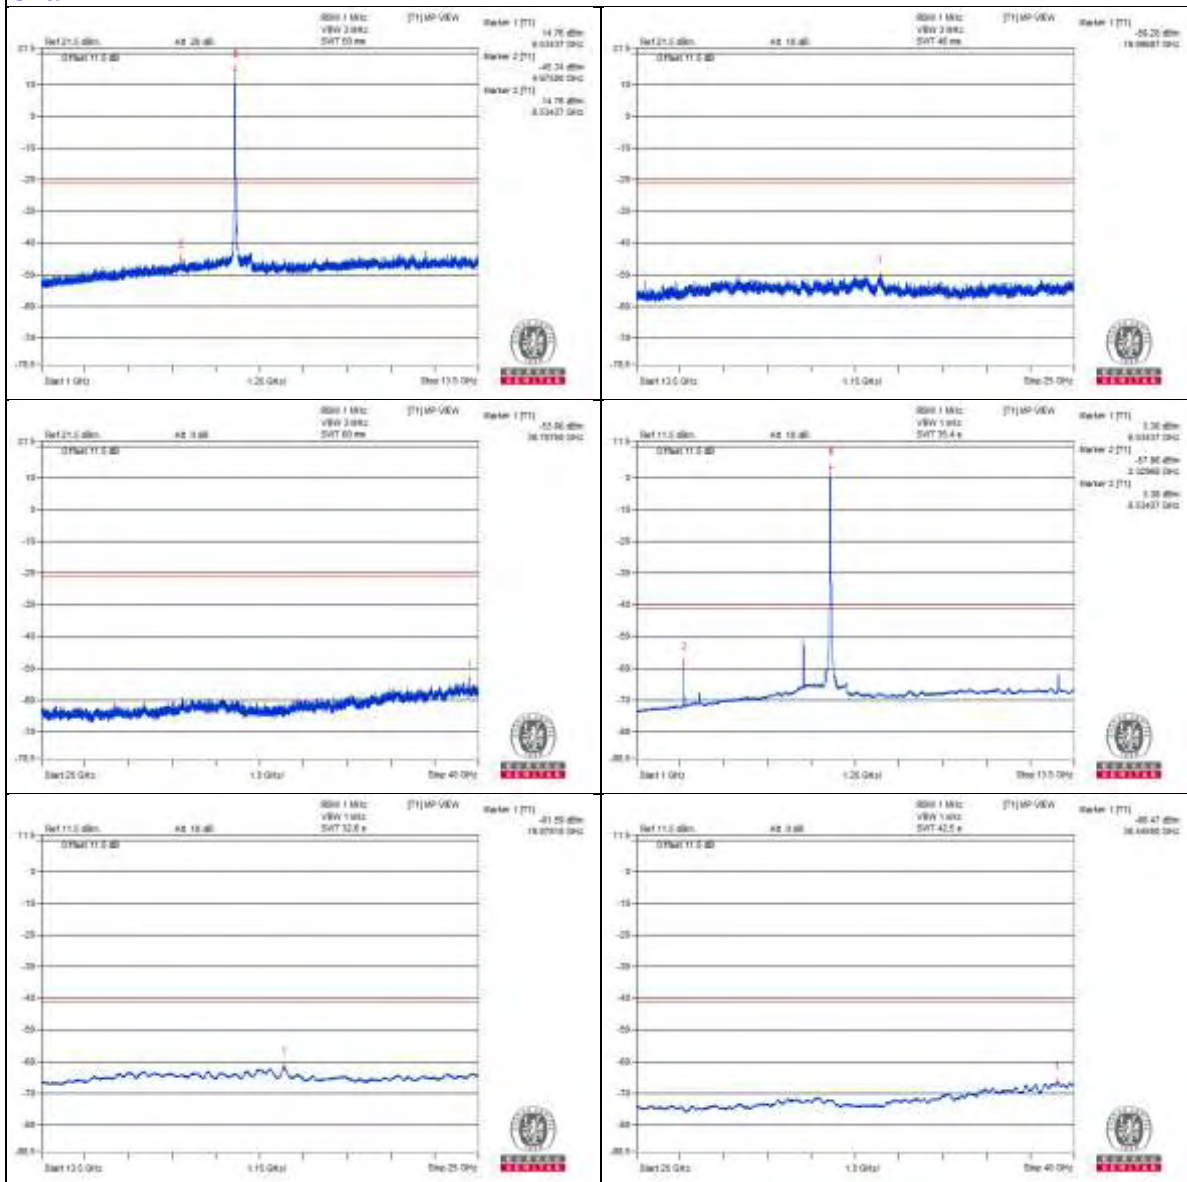

802.11ax (HE20) - Channel 149

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2490.62 PK	57.19	74	-16.81	-49.42	-49.09	8.17	-38.07
2	2489.06 AV	49.17	54	-4.83	-57.61	-56.95	8.17	-46.09
3	5481.25 PK	59.92	88.2	-28.28	-45.15	-48.54	8.17	-35.34
4	5487.5 AV	38.62	68.2	-29.58	-67.66	-67.98	8.17	-56.64
5	5759.37 PK	62.24	88.2	-25.96	-44.52	-43.9	8.17	-33.02
6	5759.37 AV	54.57	68.2	-13.63	-52.73	-51.15	8.17	-40.69
7	4462.5 PK	58.59	88.2	-29.61	-48.81	-47.07	8.17	-36.67
8	4459.37 AV	37.14	68.2	-31.06	-69.26	-69.34	8.17	-58.12
9	13392.18 PK	60.13	74	-13.87	-46.11	-46.53	8.17	-35.13
10	13390.62 AV	41.19	54	-12.81	-67.2	-63.91	8.17	-54.07
11	20080.87 PK	52.73	74	-21.27	-53.56	-53.87	8.17	-42.53
12	20083.75 AV	41.56	54	-12.44	-64.59	-65.19	8.17	-53.7

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

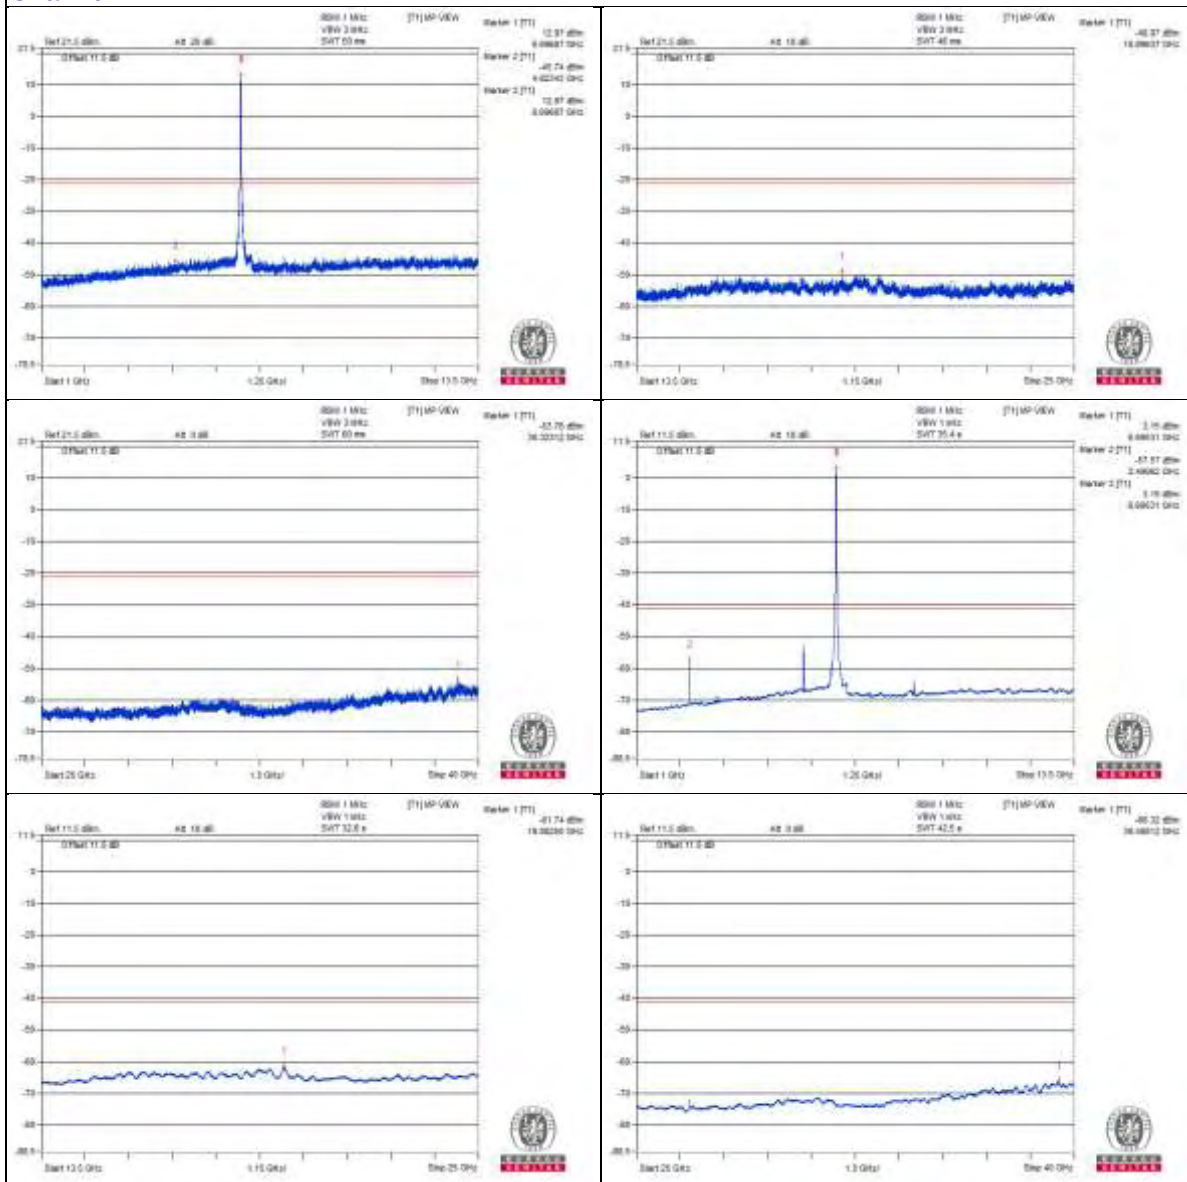

Chain 1

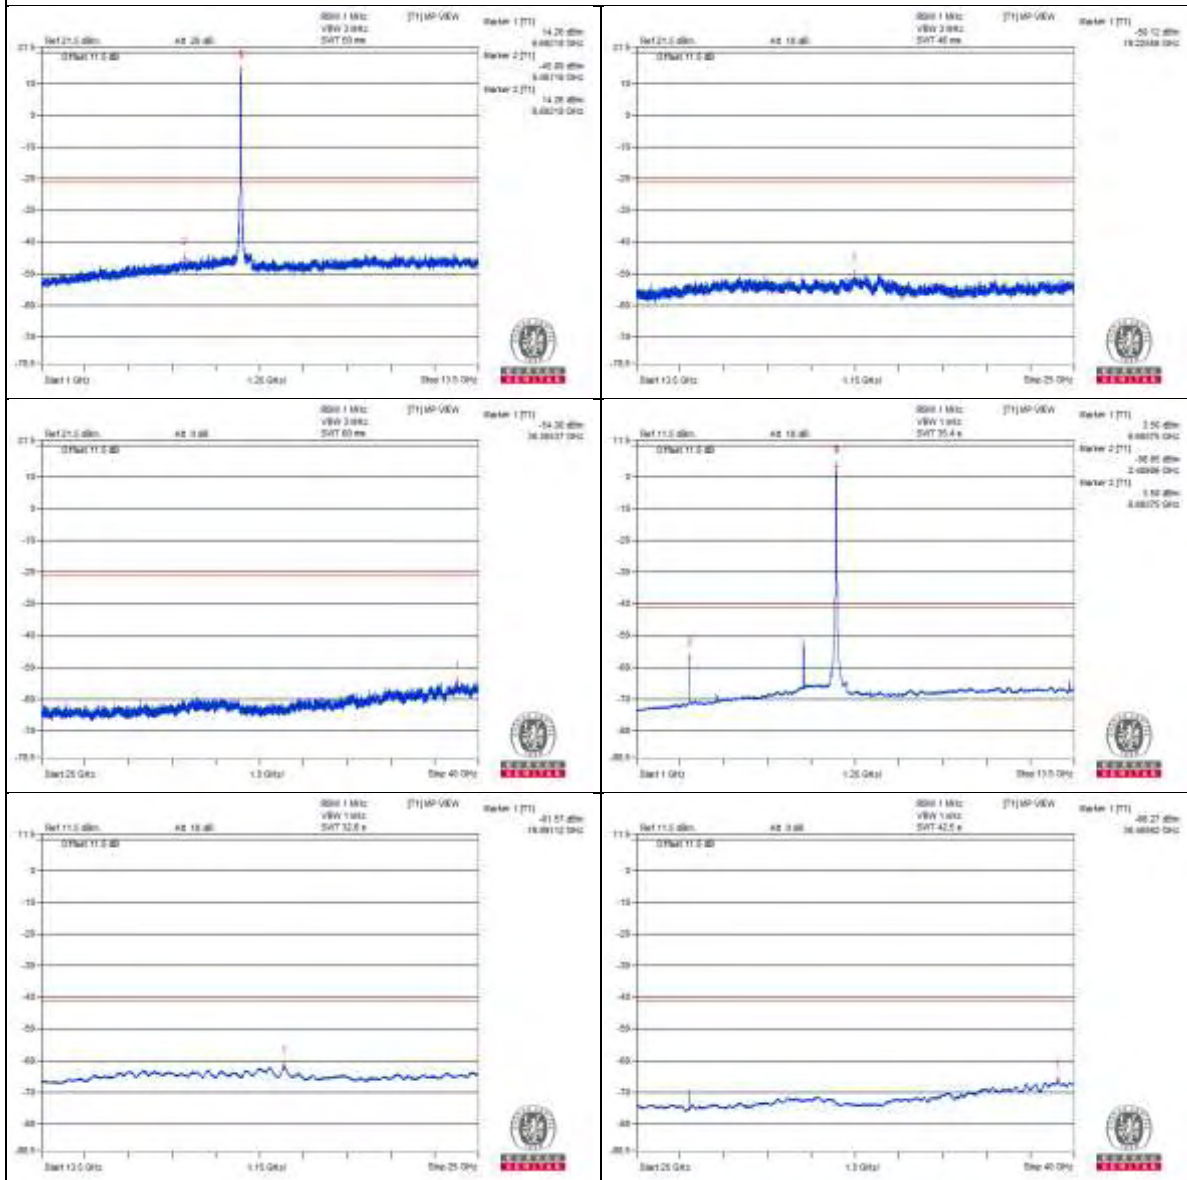

802.11ax (HE20) - Channel 181

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2653.12 PK	57.72	74	-16.28	-48.45	-49	8.17	-37.54
2	2650 AV	45.26	54	-8.74	-61.25	-61.12	8.17	-50
3	5482.81 PK	66.58	88.2	-21.62	-37.76	-44.11	8.17	-28.68
4	5484.37 AV	61.04	68.2	-7.16	-42.55	-56.69	8.17	-34.22
5	5759.37 PK	61.77	88.2	-26.43	-44.49	-44.85	8.17	-33.49
6	5759.37 AV	54.8	68.2	-13.4	-52.37	-51.02	8.17	-40.46
7	4570.31 PK	58.84	74	-15.16	-46.45	-49.18	8.17	-36.42
8	4573.43 AV	37.06	54	-16.94	-69.5	-69.27	8.17	-58.2
9	13705.56 PK	55.36	88.2	-32.84	-53.87	-49.39	8.17	-39.9
10	13709.87 AV	44.59	68.2	-23.61	-64.27	-60.31	8.17	-50.67
11	20568.18 PK	52.83	74	-21.17	-55.01	-52.55	8.17	-42.43
12	20566.75 AV	41.53	54	-12.47	-64.76	-65.06	8.17	-53.73

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

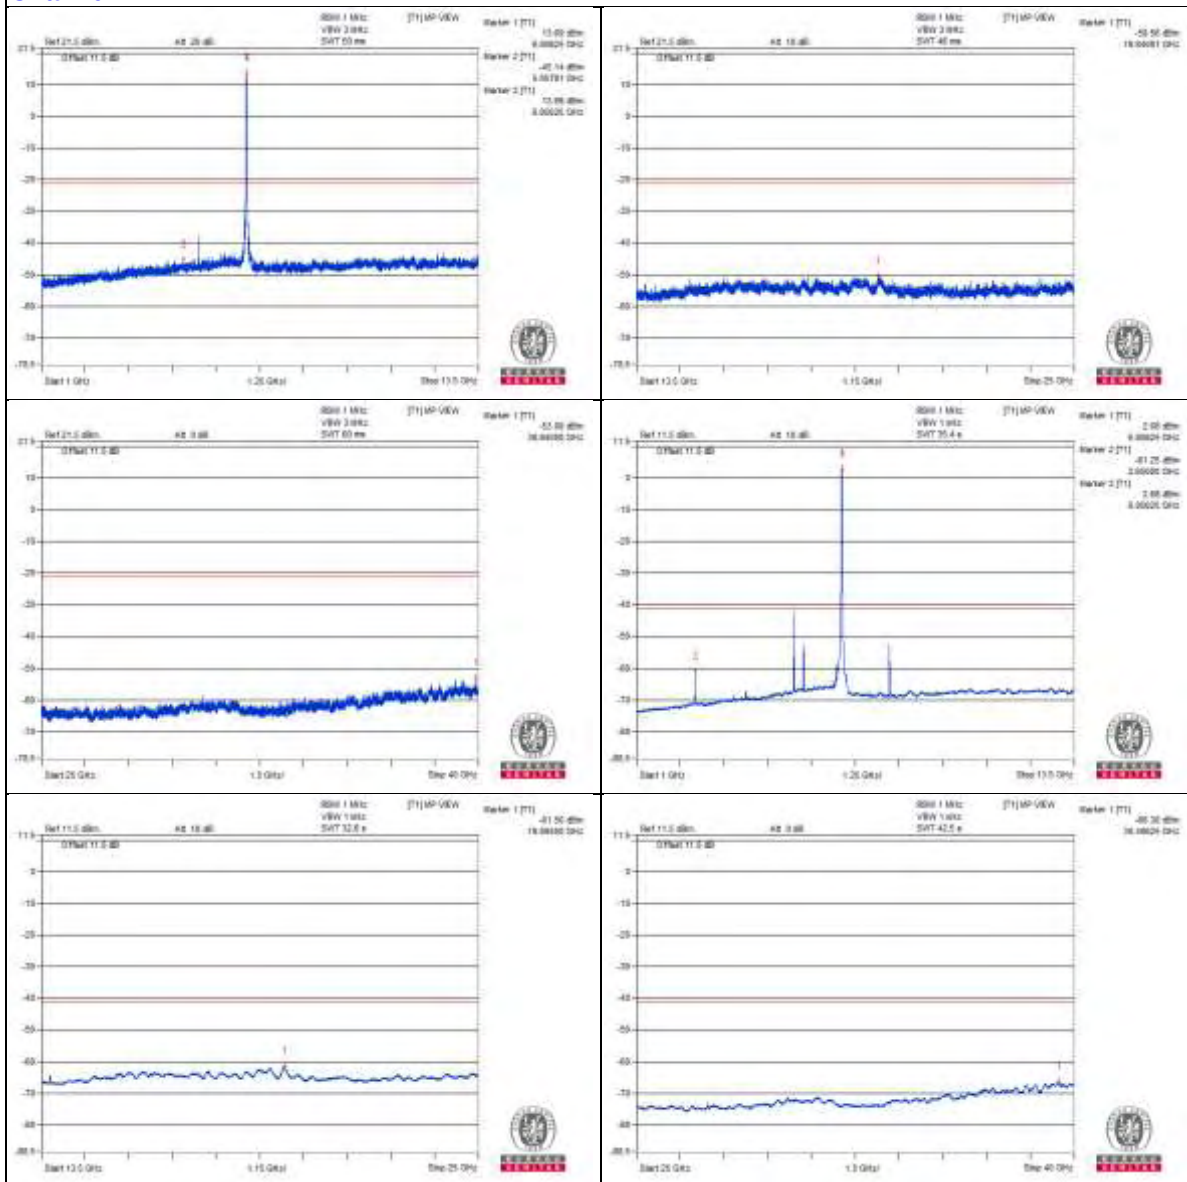

Chain 1

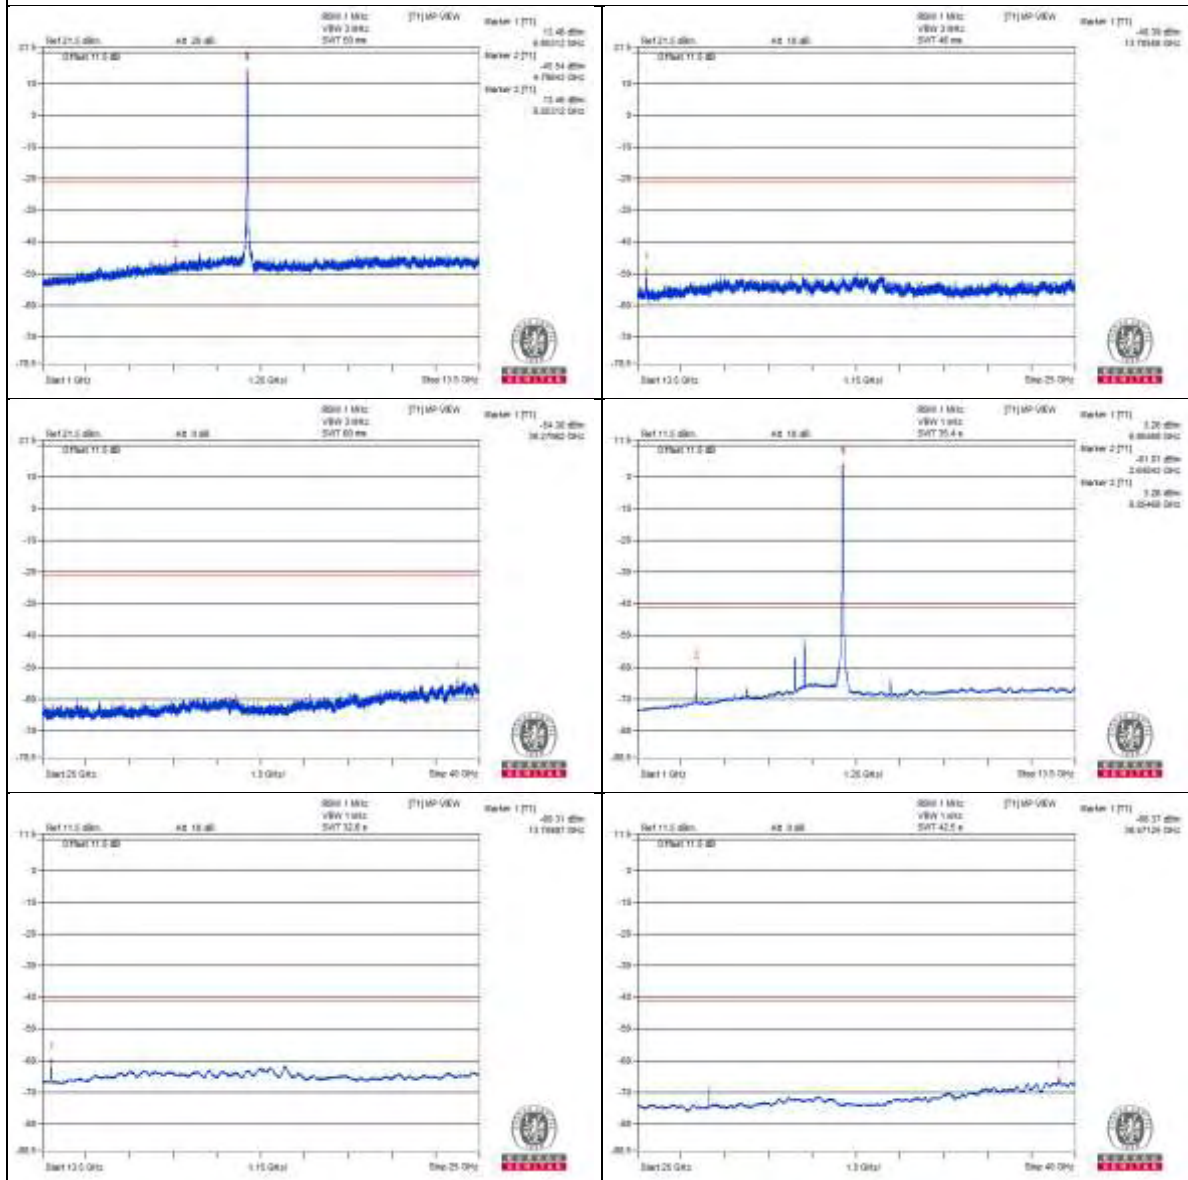

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7204.3 PK	59.71	88.2	-28.49	-45.86	-47.81	8.17	-35.55
2	7211.5 AV	47.01	68.2	-21.19	-59.43	-59.43	8.17	-48.25


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

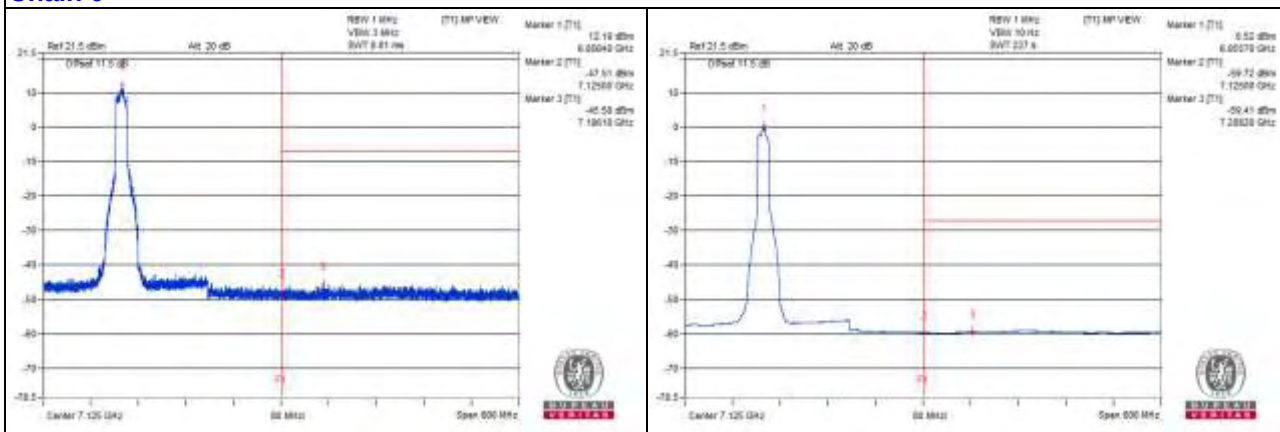

Chain 1

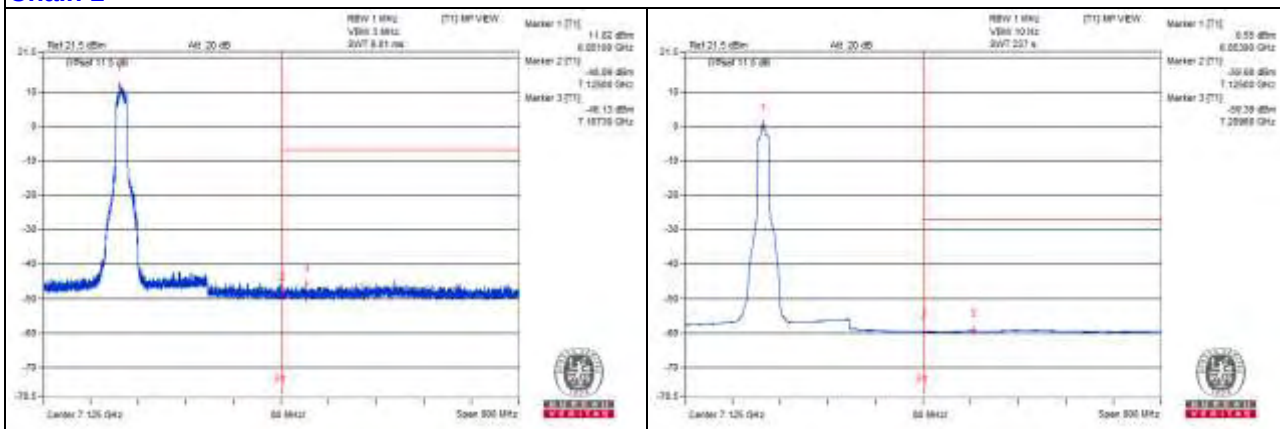

802.11ax (HE40) - Channel 3

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1760.93 PK	55.89	74	-18.11	-49.45	-52.04	8.17	-39.37
2	1759.37 AV	43.56	54	-10.44	-61.99	-63.99	8.17	-51.7
3	5482.81 PK	59.57	88.2	-28.63	-47.32	-46.47	8.17	-35.69
4	5484.37 AV	39.84	68.2	-28.36	-67.4	-65.93	8.17	-55.42
5	5759.37 PK	62.37	88.2	-25.83	-43.52	-44.71	8.17	-32.89
6	5759.37 AV	55.21	68.2	-12.99	-50.63	-51.93	8.17	-40.05
7	3979.68 PK	58.01	74	-15.99	-49.53	-47.55	8.17	-37.25
8	3976.56 AV	37.14	54	-16.86	-69.44	-69.16	8.17	-58.12
9	11926.56 PK	60.72	74	-13.28	-46.58	-45.01	8.17	-34.54
10	11929.68 AV	41.6	54	-12.4	-63.63	-66.51	8.17	-53.66
11	17897.31 PK	54.69	74	-19.31	-51.9	-51.6	8.17	-40.57
12	17898.75 AV	43.4	54	-10.6	-62.94	-63.15	8.17	-51.86

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

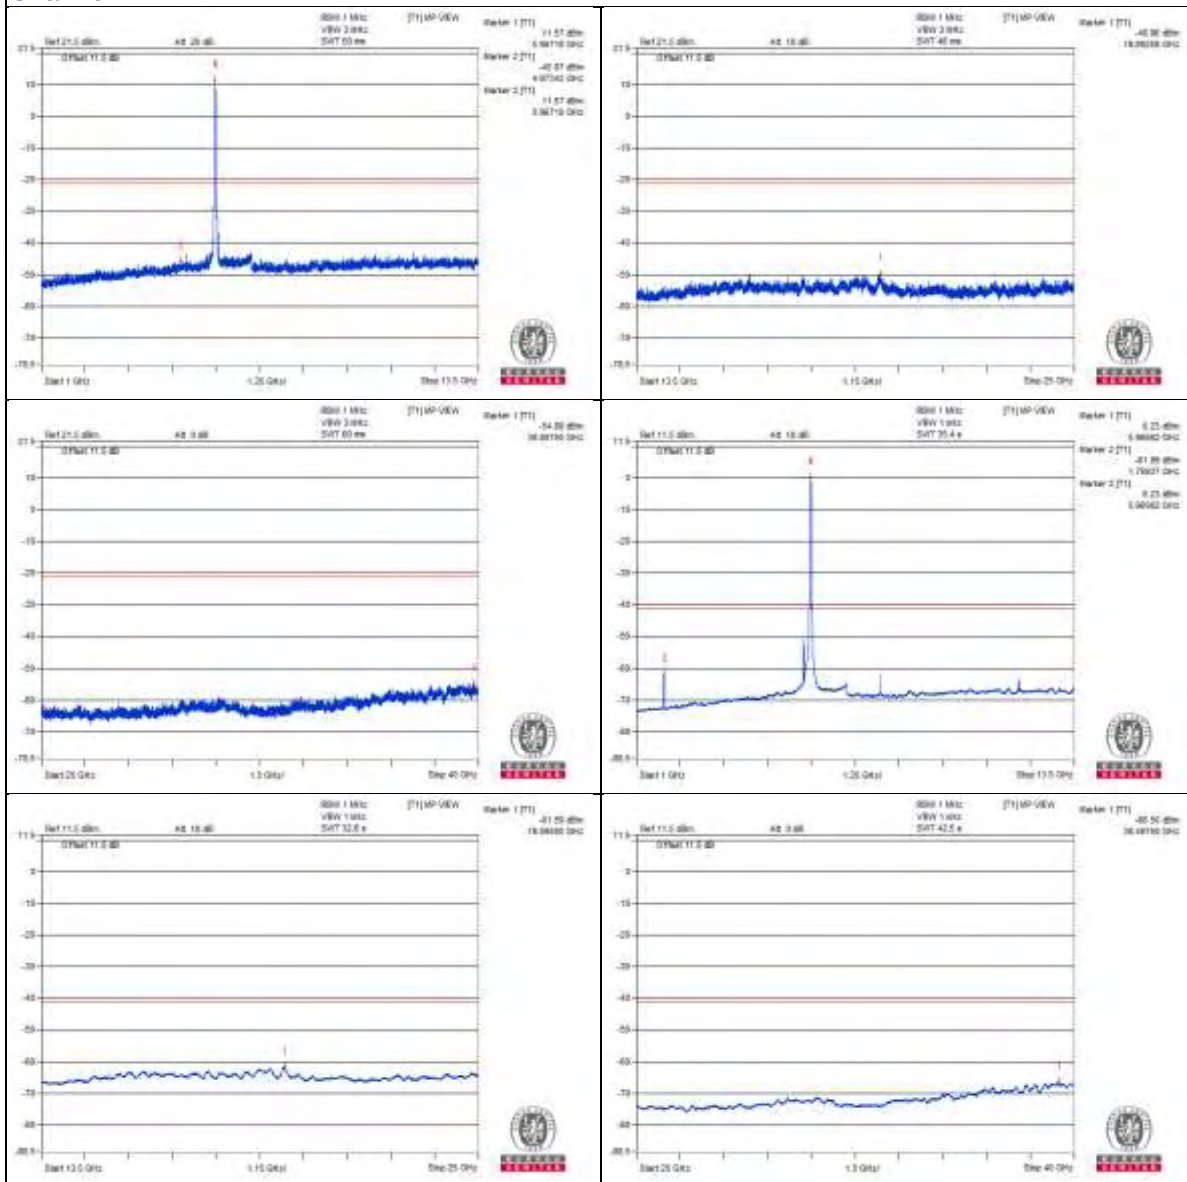

Chain 1

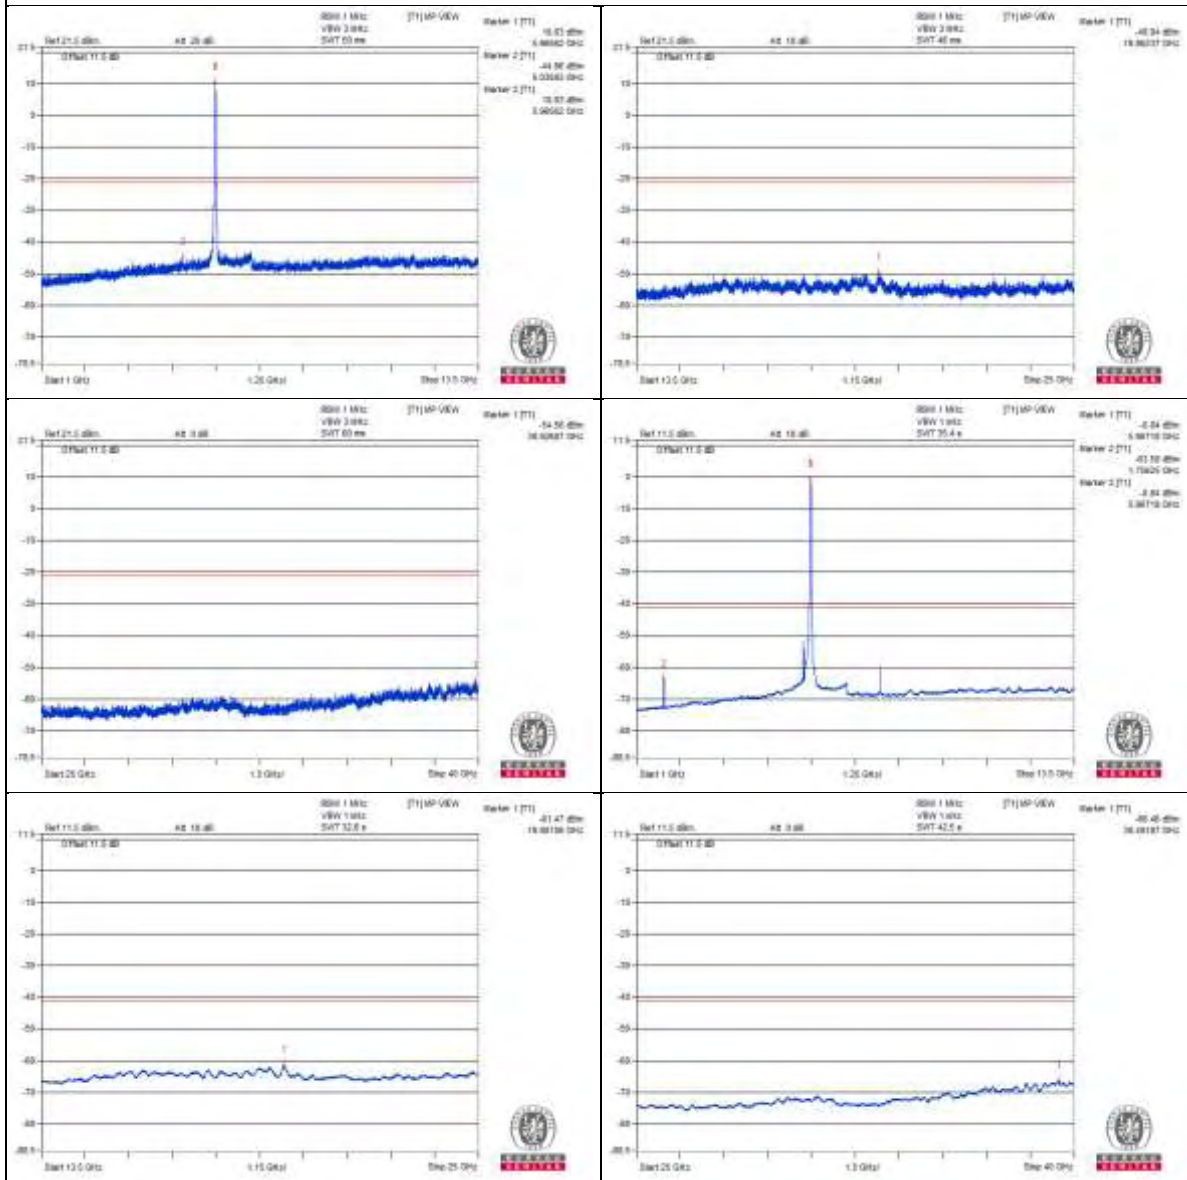

Bandedge table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5923.67 PK	82.48	88.2	-5.72	-22.24	-26.76	8.15	-12.78
2	5925 AV	65.1	68.2	-3.1	-41.84	-40.86	8.15	-30.16


Note :

Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

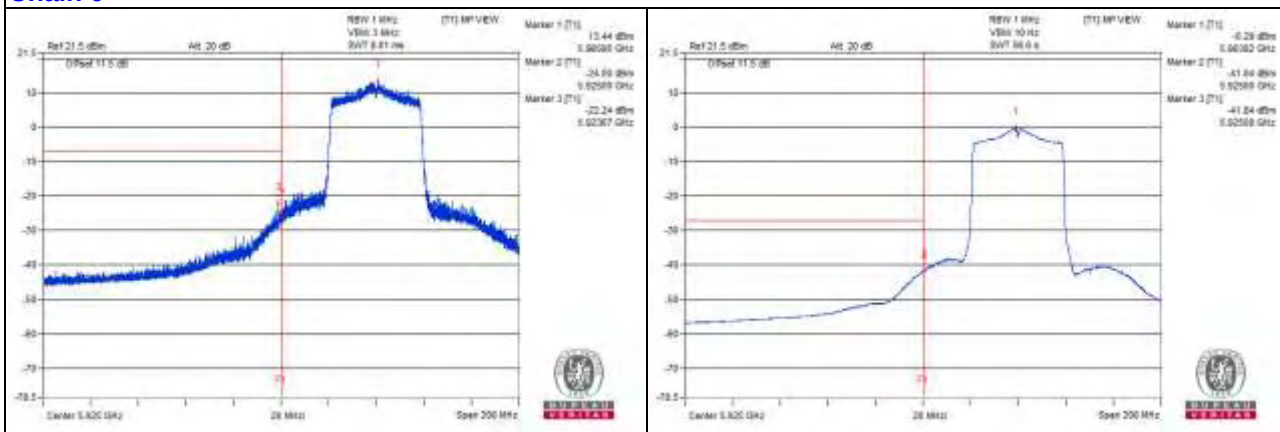

Chain 1

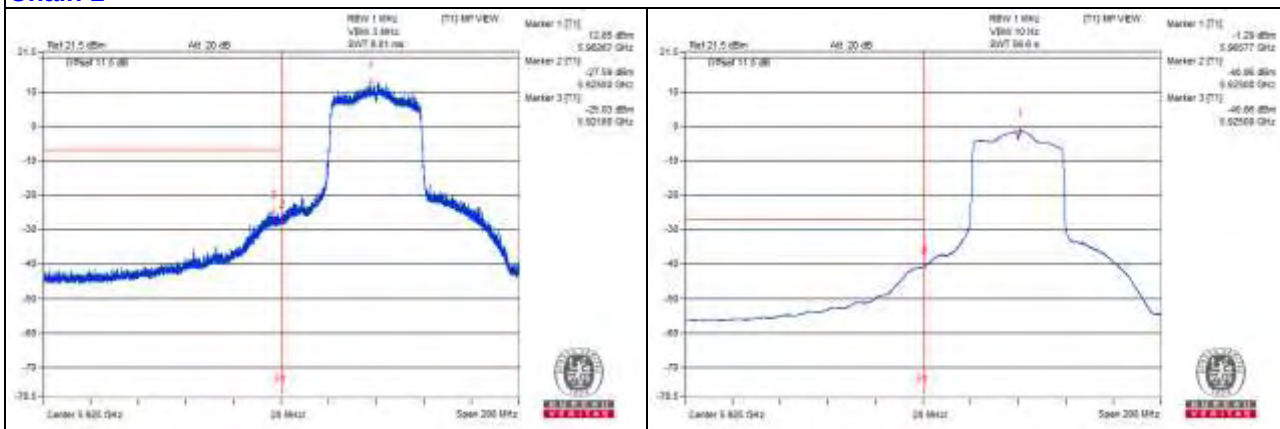

802.11ax (HE40) - Channel 43

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1959.37 PK	57.12	74	-16.88	-48.41	-50.48	8.17	-38.14
2	1957.81 AV	45.62	54	-8.38	-59.72	-62.3	8.17	-49.64
3	5484.37 PK	59.09	88.2	-29.11	-47.42	-47.28	8.17	-36.17
4	5487.5 AV	39.73	68.2	-28.47	-66.23	-67.26	8.17	-55.53
5	5759.37 PK	62.65	88.2	-25.55	-44.95	-42.87	8.17	-32.61
6	5759.37 AV	56.55	68.2	-11.65	-49.87	-49.91	8.17	-38.71
7	4114.06 PK	57.53	74	-16.47	-48.65	-49.19	8.17	-37.73
8	4109.37 AV	37.56	54	-16.44	-68.29	-69.57	8.17	-57.7
9	12328.12 PK	61.3	74	-12.7	-44.69	-45.64	8.17	-33.96
10	12331.25 AV	42.63	54	-11.37	-64.6	-63.14	8.17	-52.63
11	18492.43 PK	53.67	74	-20.33	-52.6	-52.94	8.17	-41.59
12	18499.62 AV	43.24	54	-10.76	-62.76	-63.68	8.17	-52.02

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

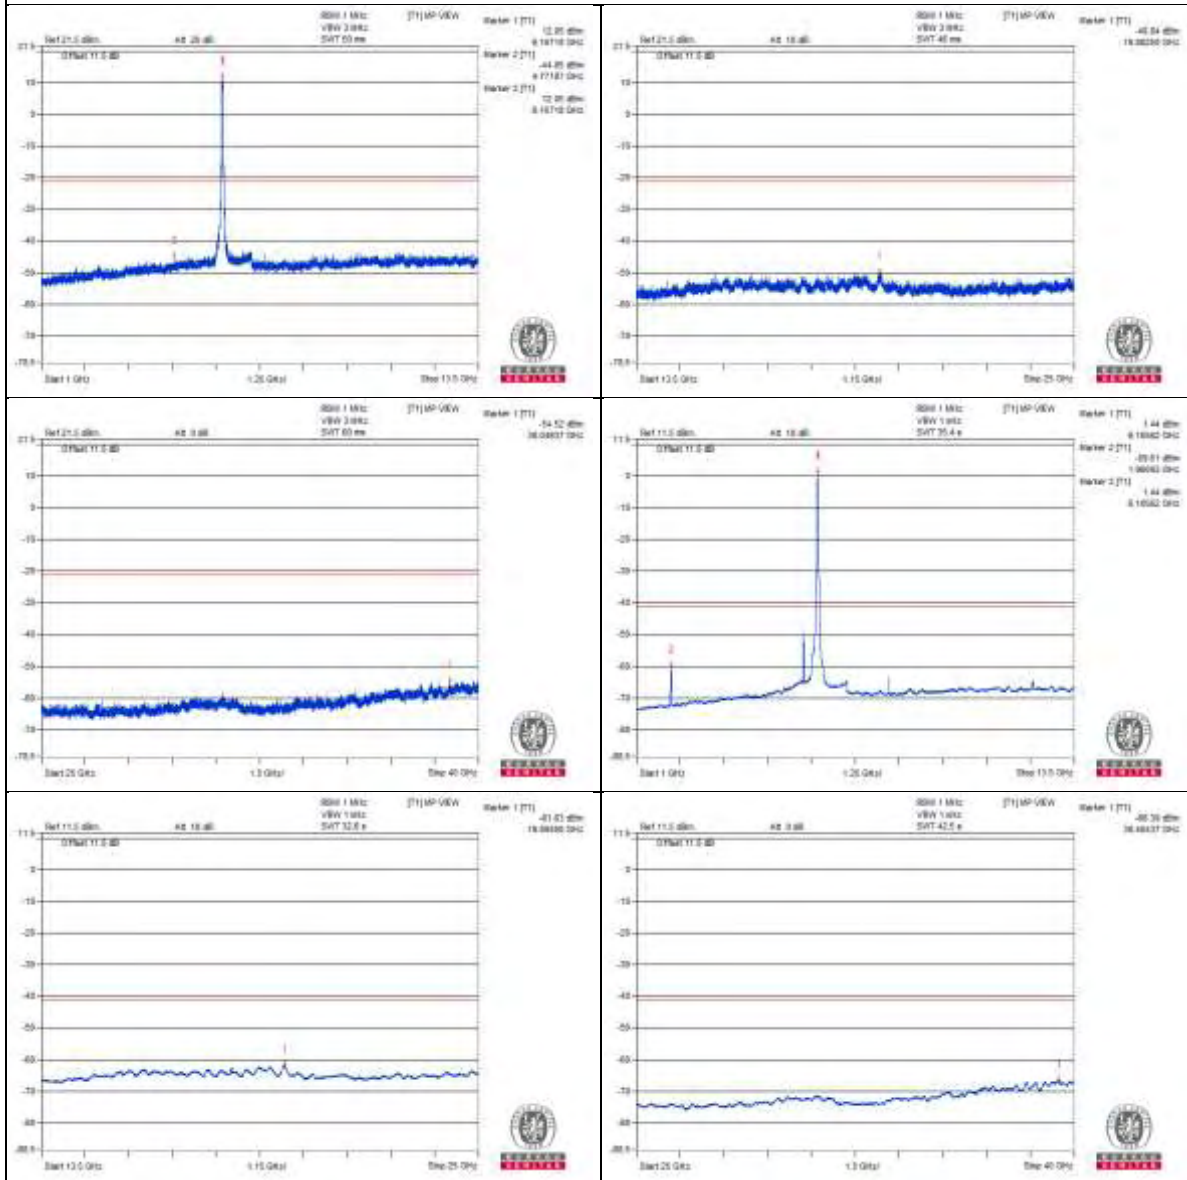

Chain 1

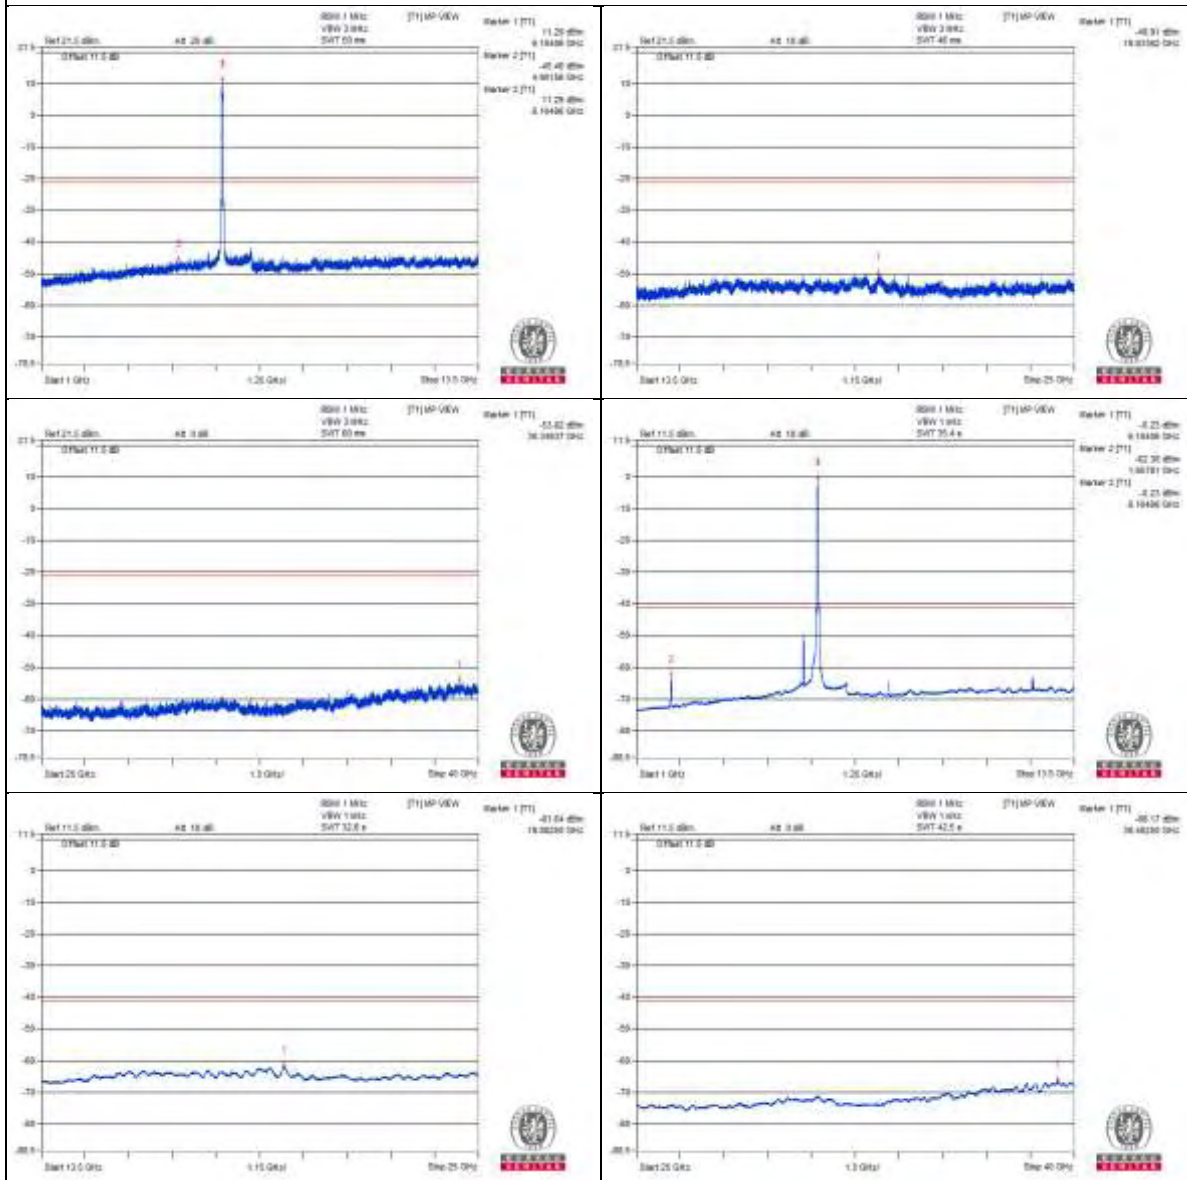

802.11ax (HE40) - Channel 91

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2195.31 PK	55.92	88.2	-32.28	-49.09	-52.68	8.17	-39.34
2	2200 AV	45.06	68.2	-23.14	-60.31	-62.8	8.17	-50.2
3	5484.37 PK	59	88.2	-29.2	-48.2	-46.8	8.17	-36.26
4	5487.5 AV	38.64	68.2	-29.56	-68.08	-67.54	8.17	-56.62
5	5759.37 PK	60.56	88.2	-27.64	-47.44	-44.73	8.17	-34.7
6	5759.37 AV	53.21	68.2	-14.99	-58.76	-50.88	8.17	-42.05
7	4275 PK	57.76	74	-16.24	-48.77	-48.6	8.17	-37.5
8	4270.31 AV	36.79	54	-17.21	-69.6	-69.7	8.17	-58.47
9	12814.06 PK	61.42	88.2	-26.78	-45.62	-44.5	8.17	-33.84
10	12810.93 AV	42.24	68.2	-25.96	-65.82	-63.02	8.17	-53.02
11	19211.18 PK	55.35	74	-18.65	-51.33	-50.87	8.17	-39.91
12	19215.5 AV	44.52	54	-9.48	-61.58	-62.29	8.17	-50.74

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

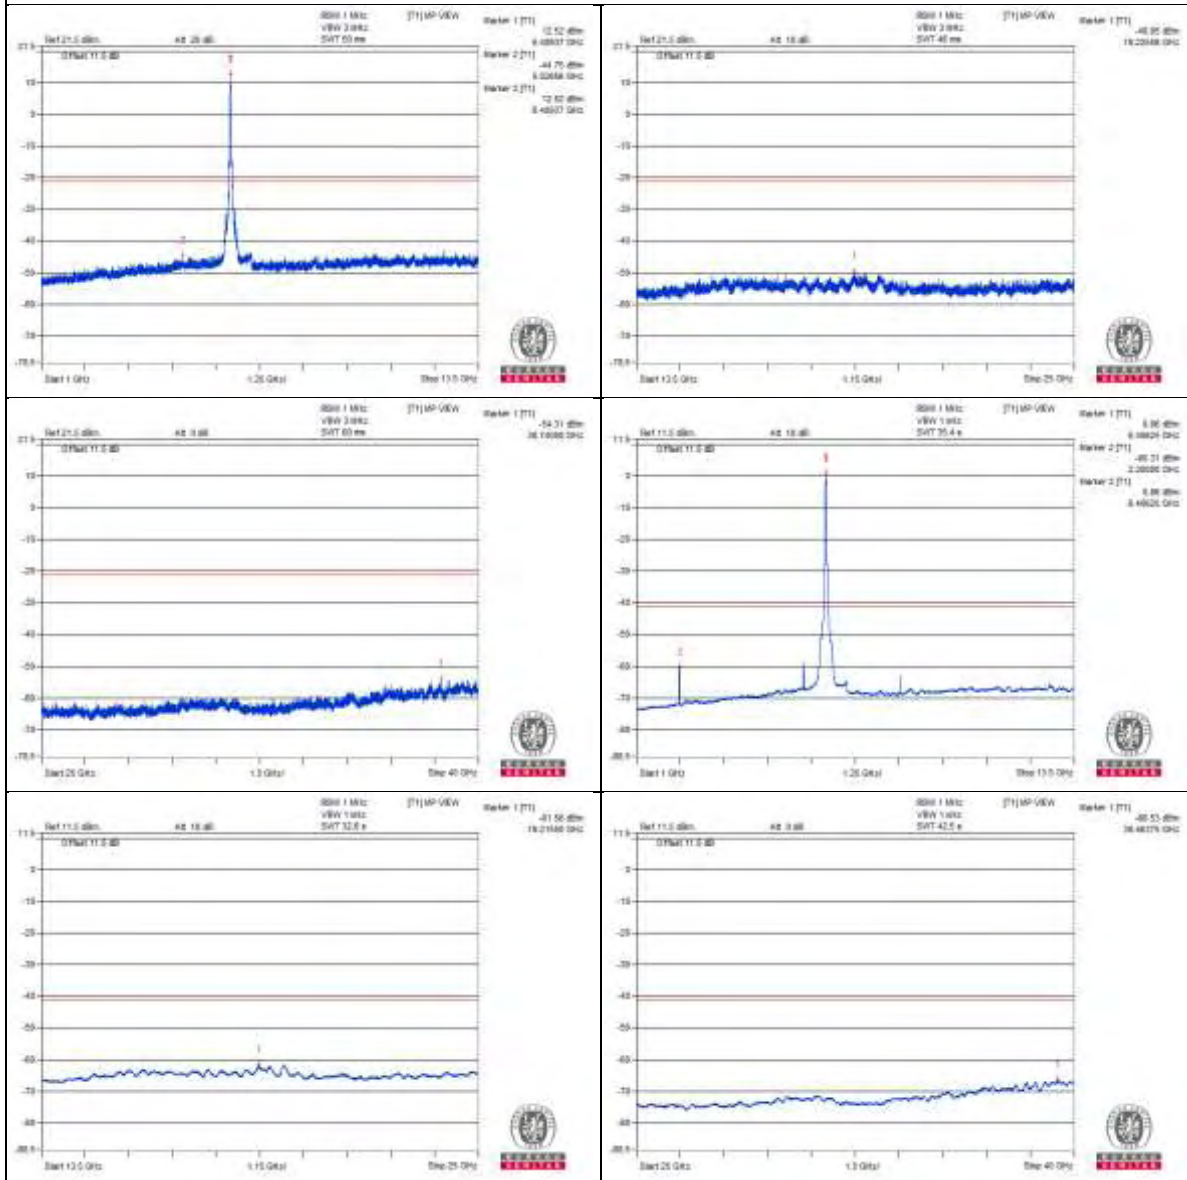

Chain 1

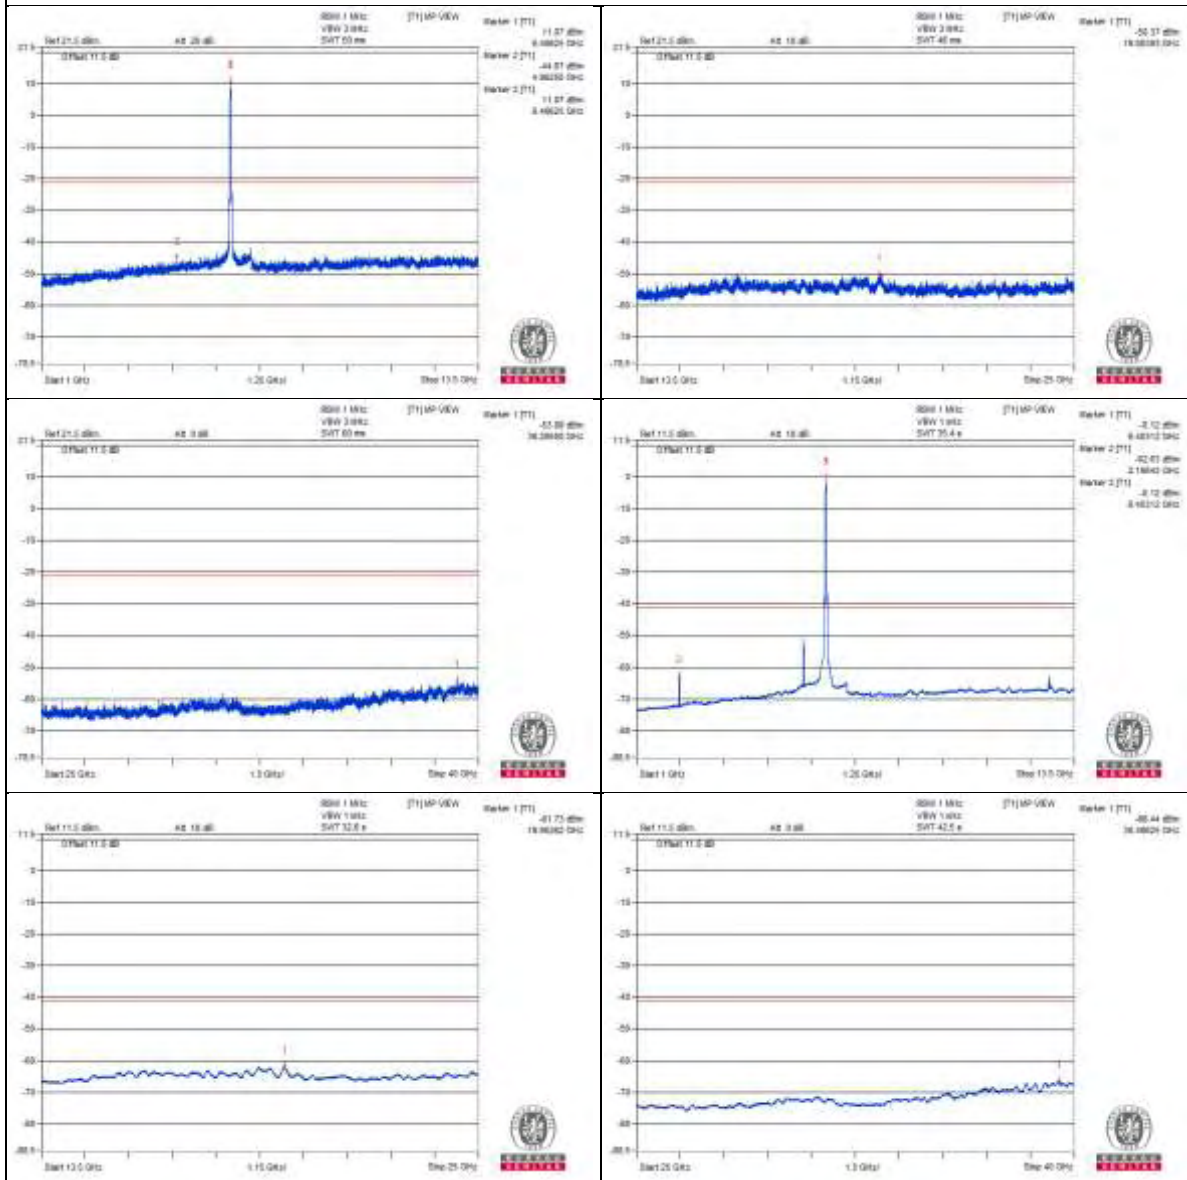

802.11ax (HE40) - Channel 123

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2362.5 PK	55.39	74	-18.61	-50.68	-51.45	8.17	-39.87
2	2359.37 AV	43.7	54	-10.3	-63.85	-61.86	8.17	-51.56
3	5485.93 PK	59.65	88.2	-28.55	-45.79	-48.09	8.17	-35.61
4	5482.81 AV	38.7	68.2	-29.5	-67.97	-67.52	8.17	-56.56
5	5759.37 PK	61.29	88.2	-26.91	-46.79	-43.97	8.17	-33.97
6	5759.37 AV	53.95	68.2	-14.25	-56.16	-50.53	8.17	-41.31
7	4381.25 PK	58.18	74	-15.82	-48.44	-48.08	8.17	-37.08
8	4376.56 AV	37.06	54	-16.94	-69.51	-69.26	8.17	-58.2
9	13126.56 PK	60.46	88.2	-27.74	-45.95	-46.01	8.17	-34.8
10	13131.25 AV	41.5	68.2	-26.7	-66.6	-63.75	8.17	-53.76
11	19691.31 PK	52.19	74	-21.81	-53.87	-54.67	8.17	-43.07
12	19699.93 AV	41.5	54	-12.5	-65.28	-64.62	8.17	-53.76

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

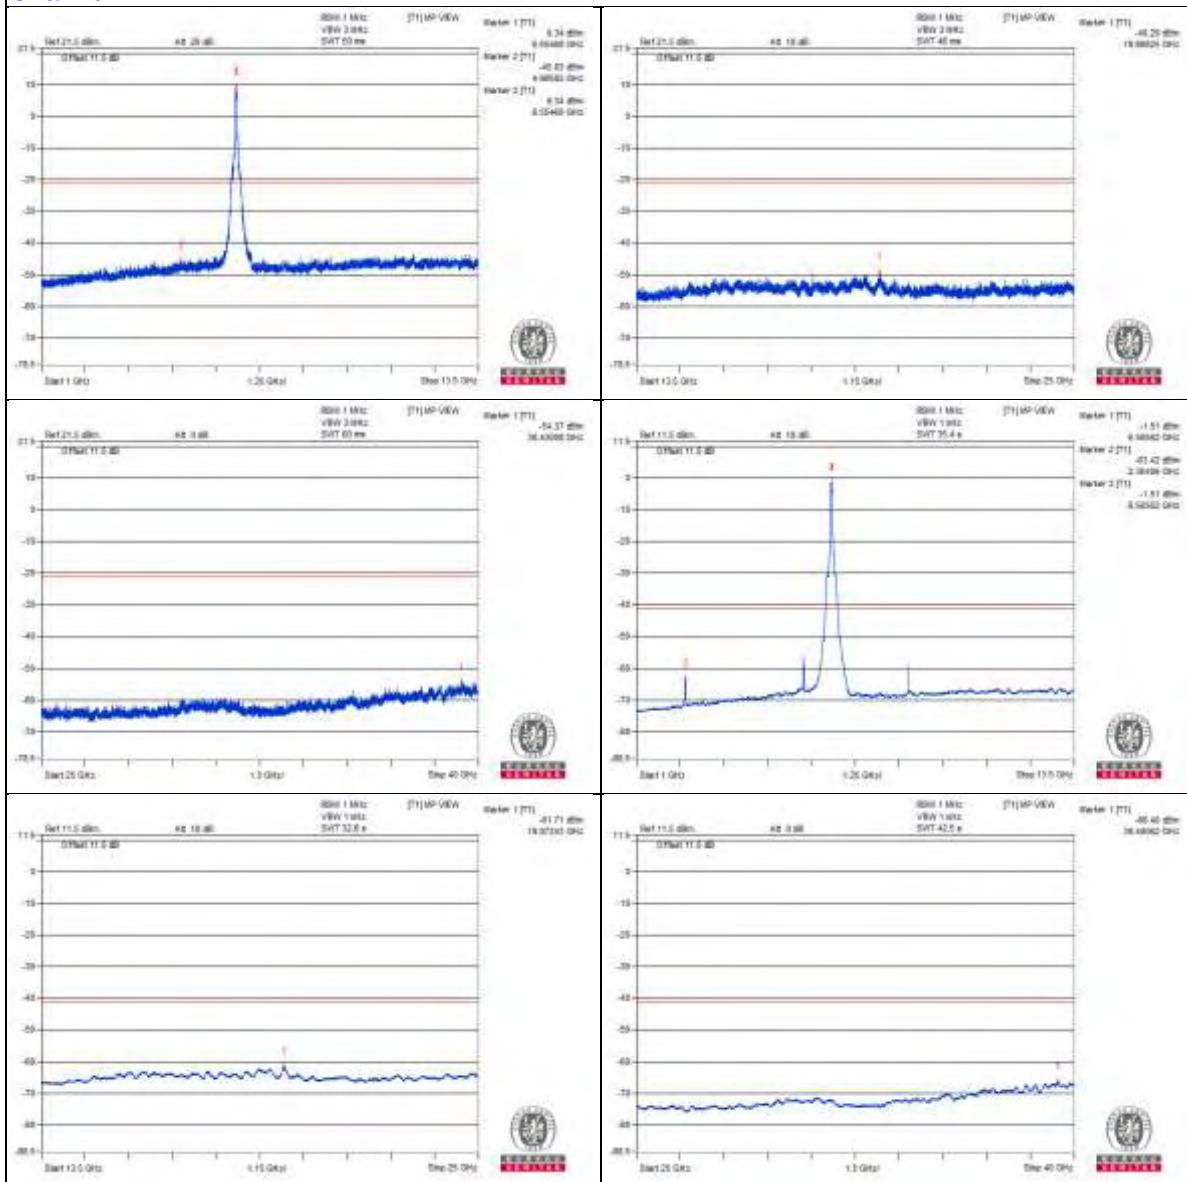

Chain 1

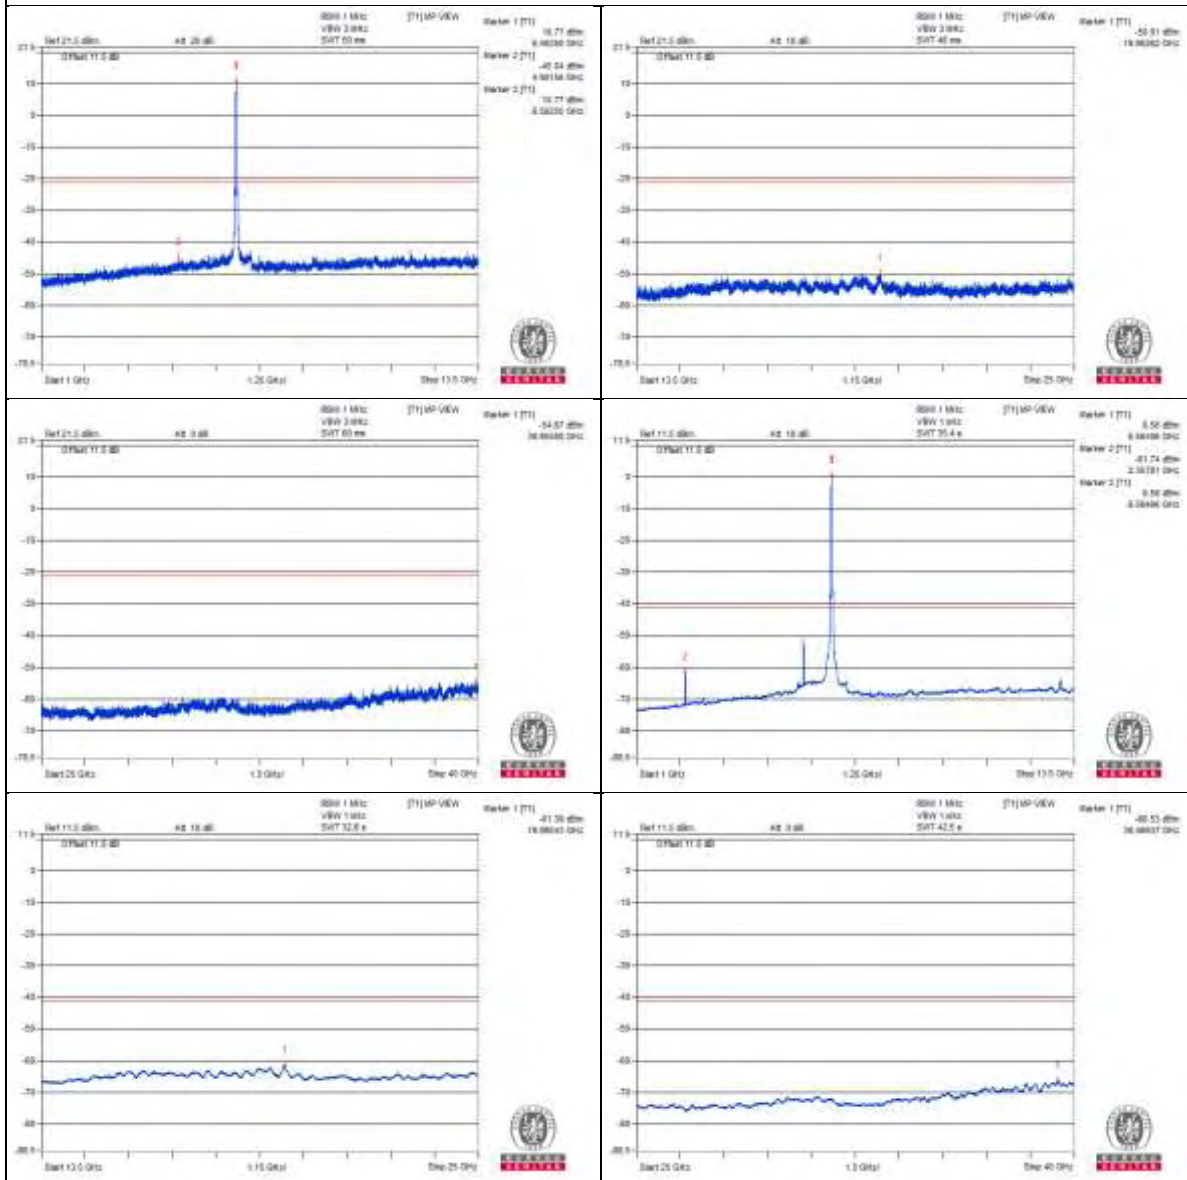

802.11ax (HE40) - Channel 155

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2515.62 PK	56.34	74	-17.66	-49.99	-50.22	8.17	-38.92
2	2518.75 AV	43.89	54	-10.11	-62.53	-62.58	8.17	-51.37
3	5481.25 PK	59.28	88.2	-28.92	-47.93	-46.5	8.17	-35.98
4	5484.37 AV	38.49	68.2	-29.71	-68.2	-67.71	8.17	-56.77
5	5759.37 PK	62.09	88.2	-26.11	-44.86	-43.9	8.17	-33.17
6	5759.37 AV	54.69	68.2	-13.51	-53.91	-50.32	8.17	-40.57
7	4479.68 PK	57.95	88.2	-30.25	-49.38	-47.75	8.17	-37.31
8	4482.81 AV	36.94	68.2	-31.26	-69.53	-69.47	8.17	-58.32
9	13448.43 PK	61.27	88.2	-26.93	-45.59	-44.79	8.17	-33.99
10	13451.56 AV	40.49	68.2	-27.71	-67.18	-65	8.17	-54.77
11	20178.62 PK	52.2	74	-21.8	-54.68	-53.85	8.17	-43.06
12	20177.18 AV	41.69	54	-12.31	-64.48	-65.03	8.17	-53.57

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

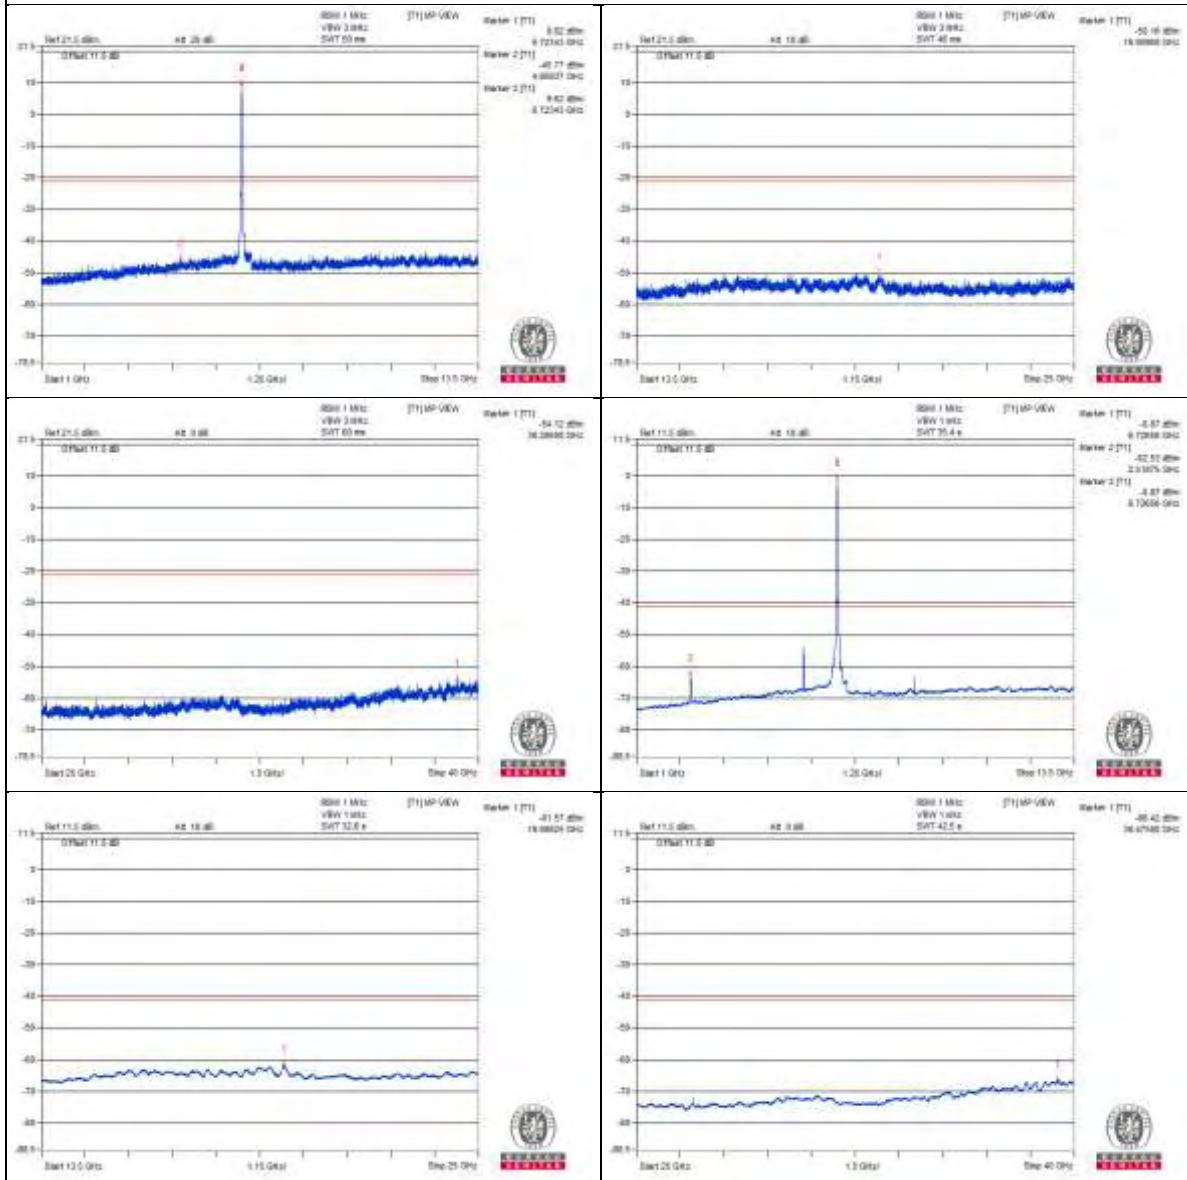

Chain 1

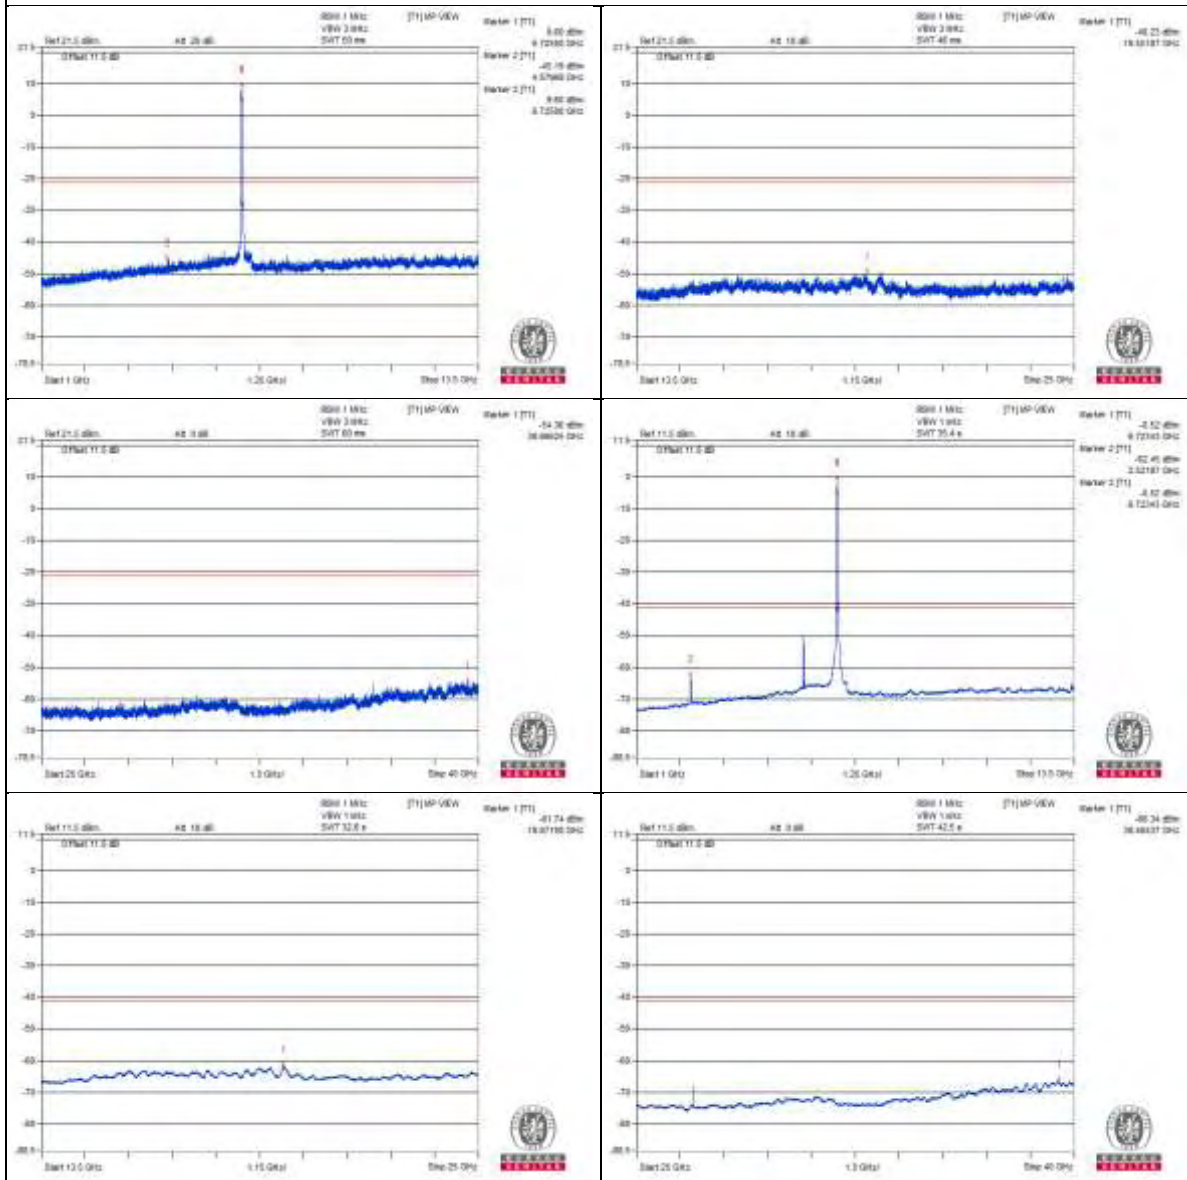

802.11ax (HE40) - Channel 179

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2637.5 PK	57.01	74	-16.99	-50.19	-48.79	8.17	-38.25
2	2637.5 AV	40.52	54	-13.48	-66.37	-65.51	8.17	-54.74
3	5487.5 PK	59.23	88.2	-28.97	-47.34	-47.09	8.17	-36.03
4	5485.93 AV	38.54	68.2	-29.66	-68.13	-67.69	8.17	-56.72
5	5759.37 PK	61.55	88.2	-26.65	-45.79	-44.14	8.17	-33.71
6	5759.37 AV	54.91	68.2	-13.29	-53.53	-50.17	8.17	-40.35
7	4562.5 PK	58.94	74	-15.06	-48.15	-46.93	8.17	-36.32
8	4562.5 AV	37.4	54	-16.6	-68.78	-69.32	8.17	-57.86
9	13688.31 PK	51.92	88.2	-36.28	-56.53	-53.15	8.17	-43.34
10	13689.75 AV	42.65	68.2	-25.55	-65.34	-62.65	8.17	-52.61
11	20536.56 PK	52.46	74	-21.54	-52.56	-56.09	8.17	-42.8
12	20539.43 AV	40.96	54	-13.04	-65.53	-65.43	8.17	-54.3

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

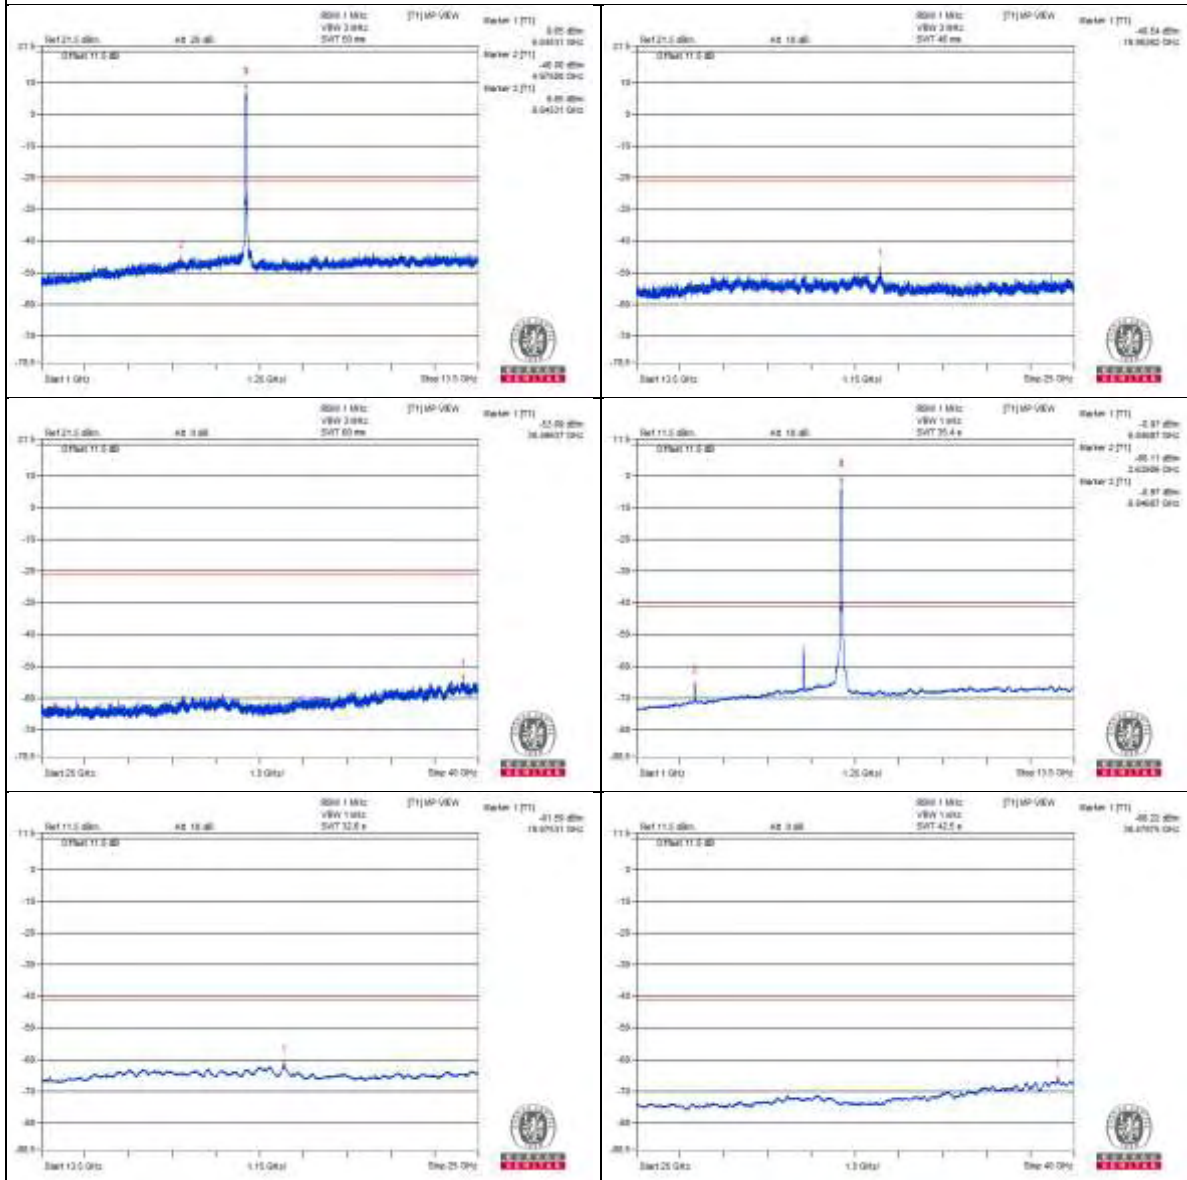

Chain 1

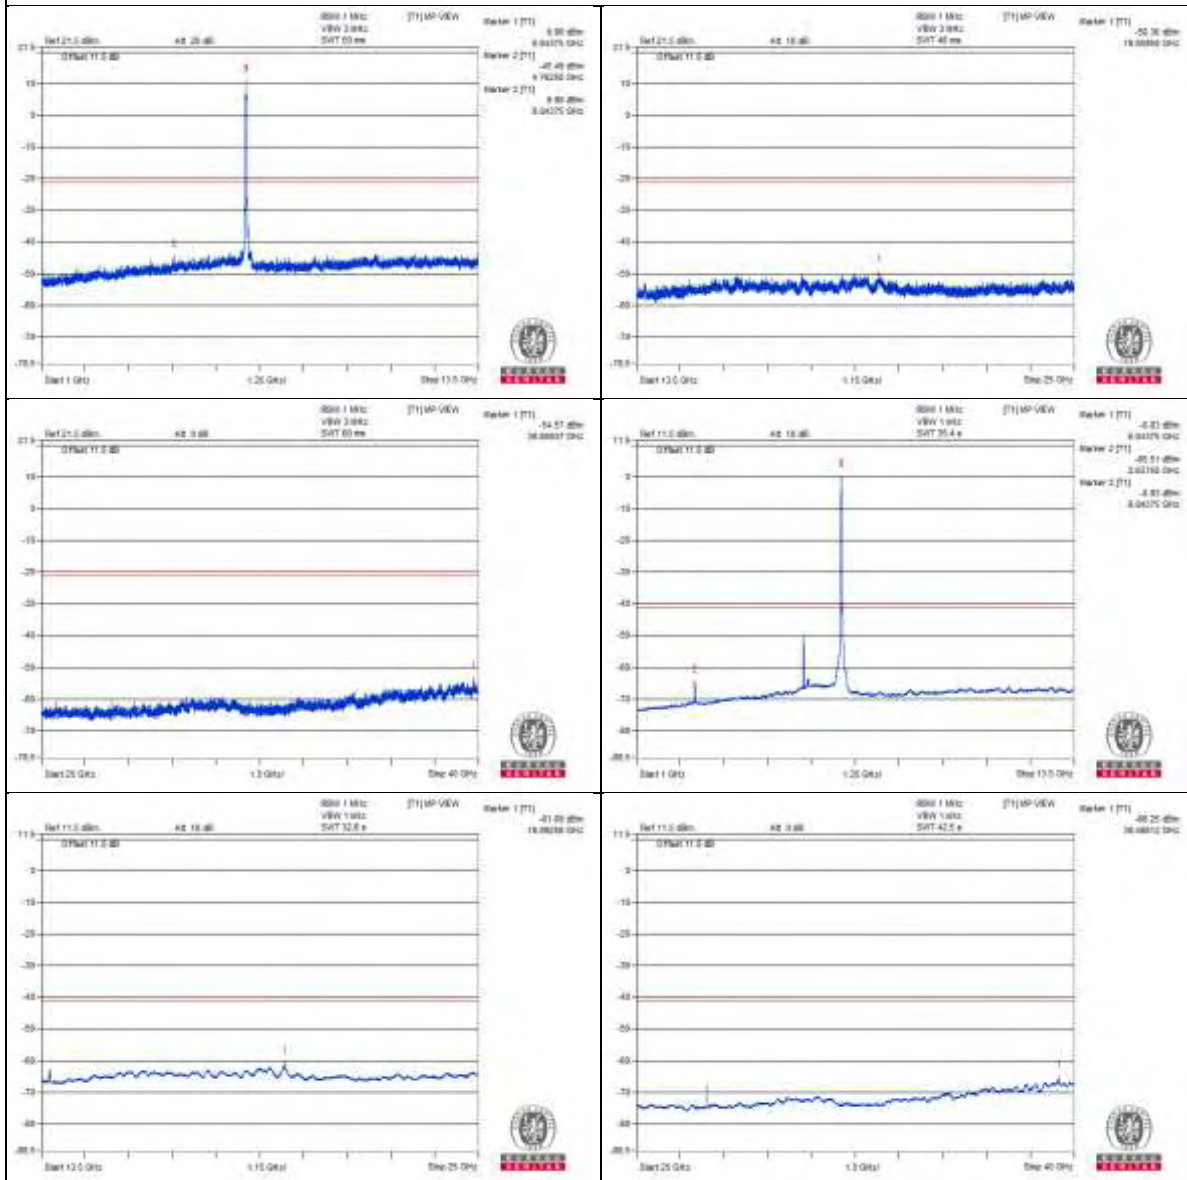

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	7151.7 PK	59.99	88.2	-28.21	-46.92	-46.02	8.17	-35.27
2	7204.5 AV	47.01	68.2	-21.19	-59.41	-59.45	8.17	-48.25


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

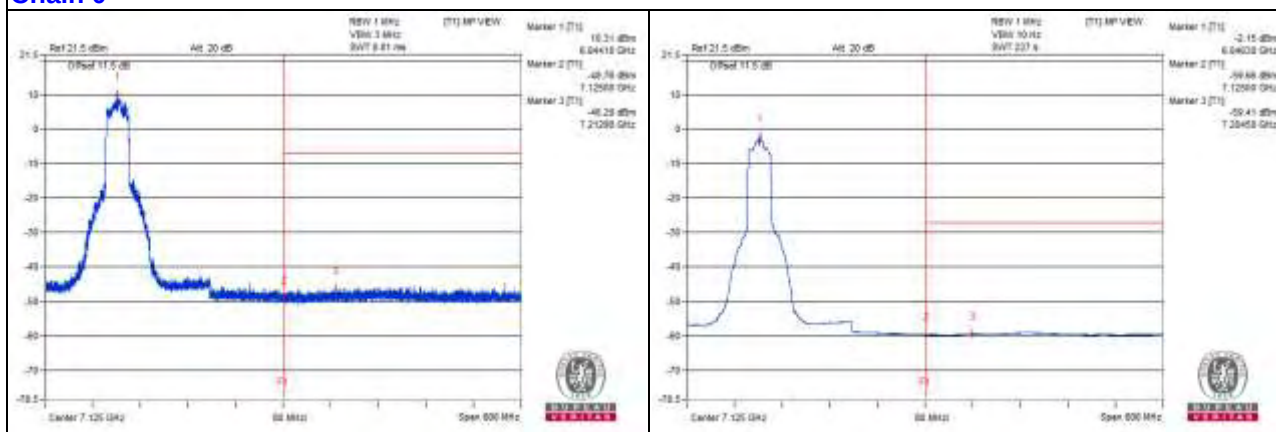

Chain 1

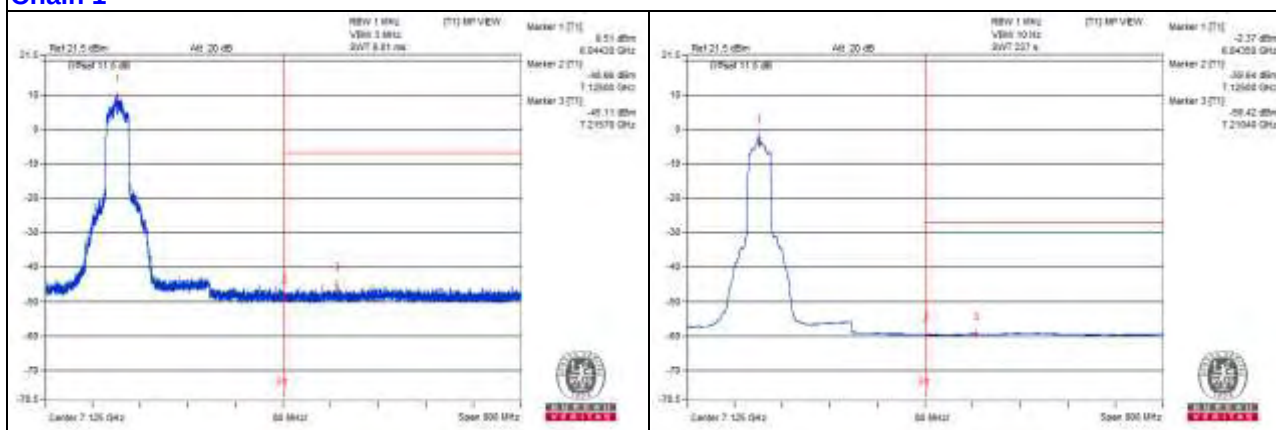

802.11ax (HE80) - Channel 7

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1776.56 PK	54.84	74	-19.16	-51	-52.3	8.17	-40.42
2	1781.25 AV	41.07	54	-12.93	-66.35	-64.57	8.17	-54.19
3	5487.5 PK	59.85	88.2	-28.35	-45.52	-48.02	8.17	-35.41
4	5487.5 AV	39.87	68.2	-28.33	-65.93	-67.31	8.17	-55.39
5	5757.81 PK	61.68	88.2	-26.52	-45.08	-44.46	8.17	-33.58
6	5759.37 AV	52.96	68.2	-15.24	-52.17	-55.37	8.17	-42.3
7	3989.06 PK	57.79	74	-16.21	-48.37	-48.95	8.17	-37.47
8	3989.06 AV	37.09	54	-16.91	-69.05	-69.67	8.17	-58.17
9	11975 PK	60.56	74	-13.44	-45.24	-46.64	8.17	-34.7
10	11968.75 AV	41.19	54	-12.81	-66.38	-64.35	8.17	-54.07
11	17951.93 PK	53.25	74	-20.75	-53	-53.38	8.17	-42.01
12	17954.81 AV	42.14	54	-11.86	-64.34	-64.26	8.17	-53.12

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

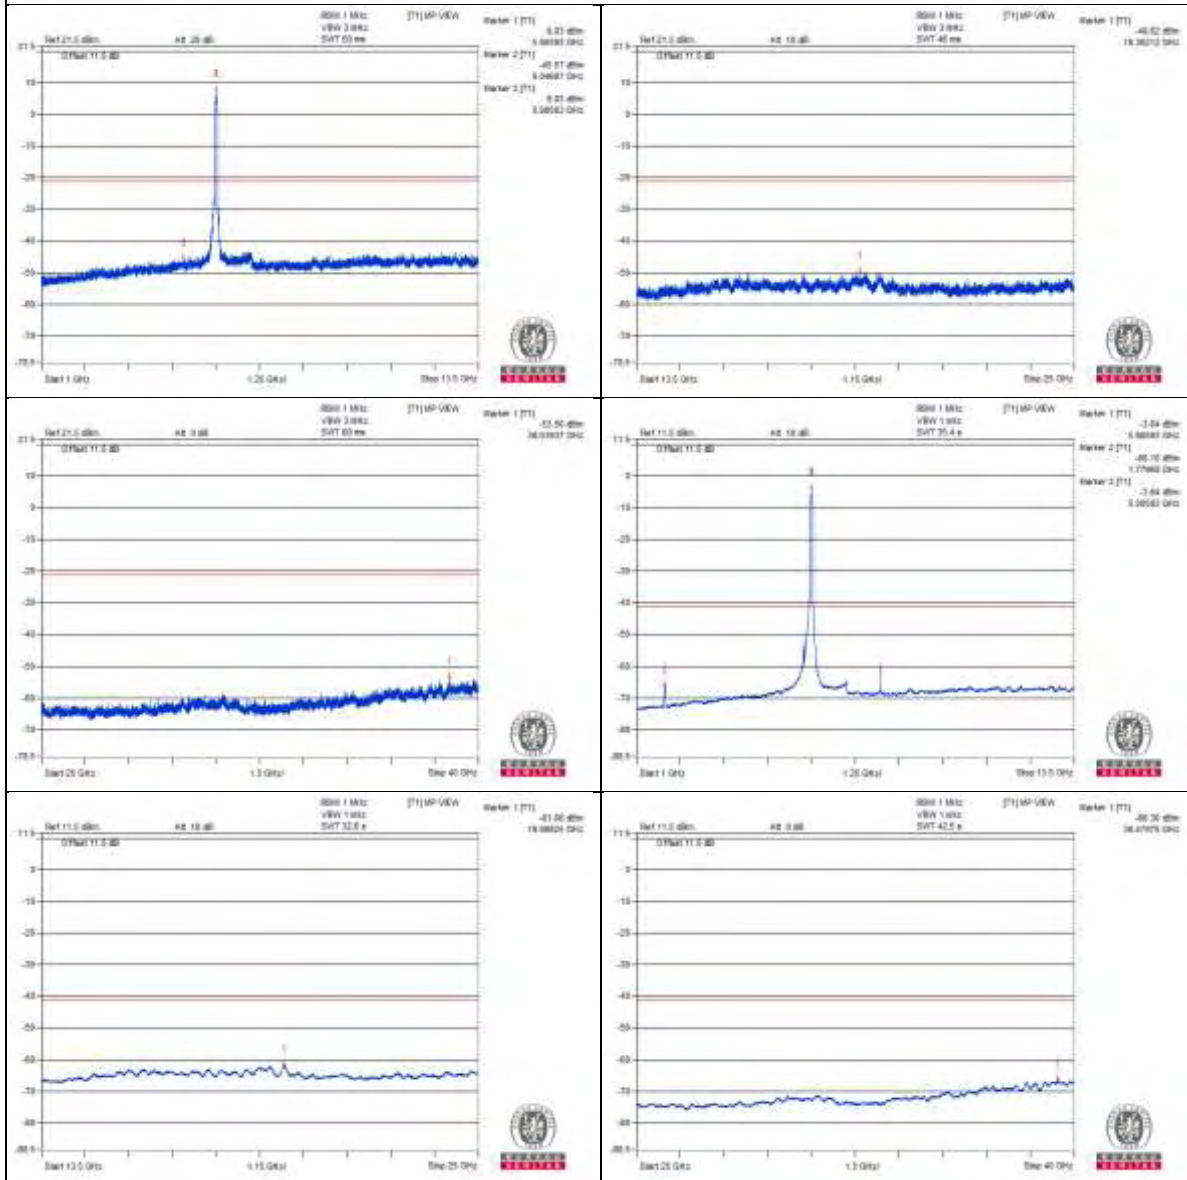

Chain 1

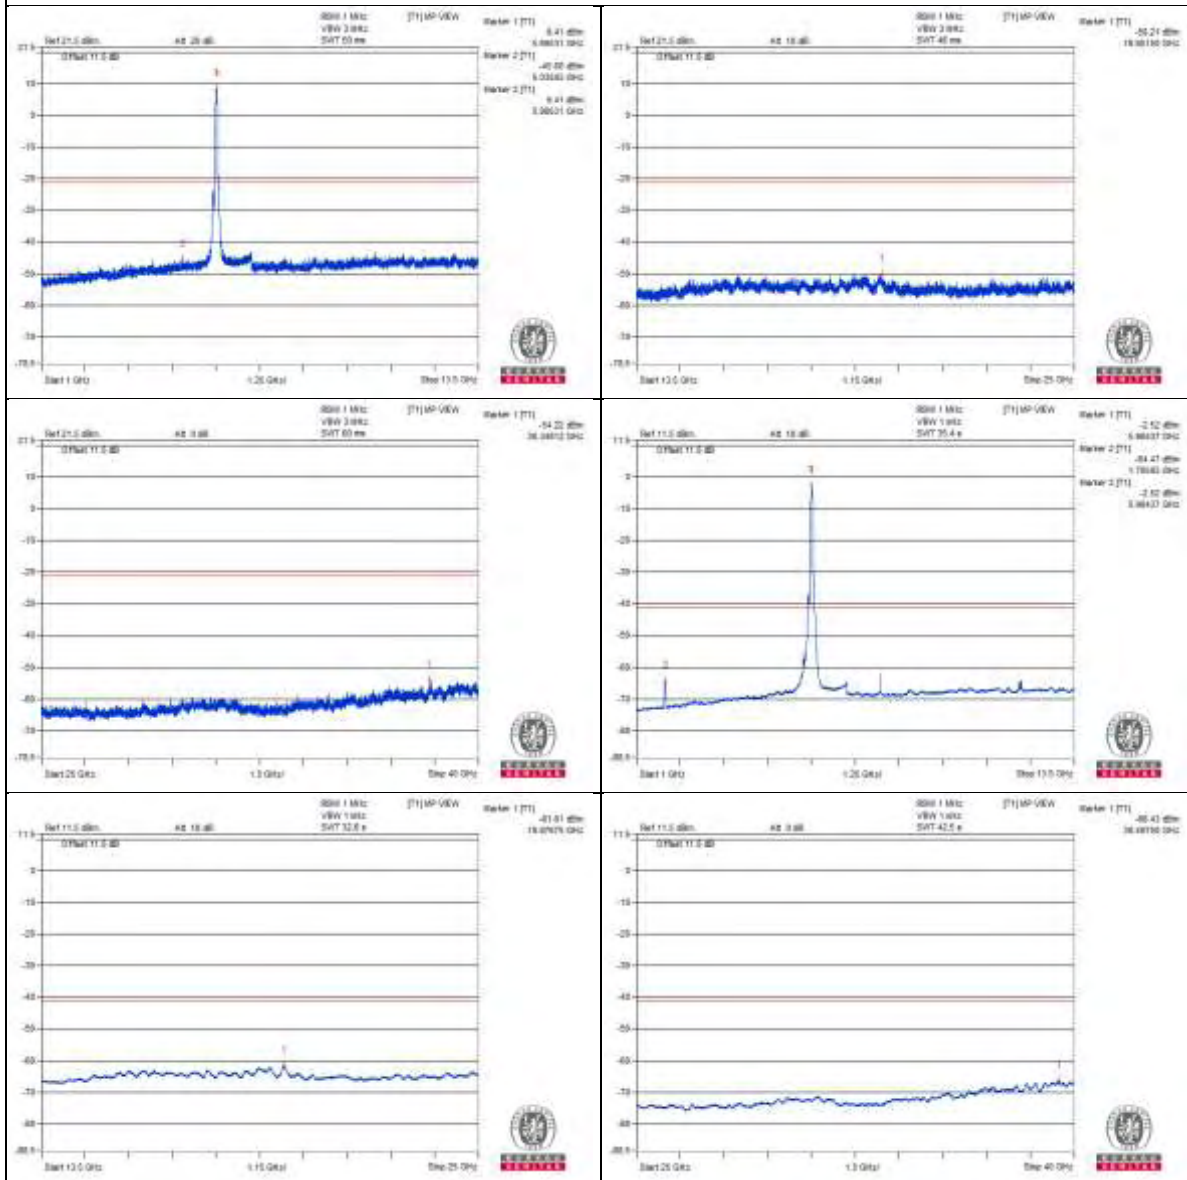

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5897 PK	82.67	88.2	-5.53	-34.21	-20.94	8.15	-12.59
2	5903.75 AV	66.79	68.2	-1.41	-42.87	-37.8	8.15	-28.47


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.

Chain 0

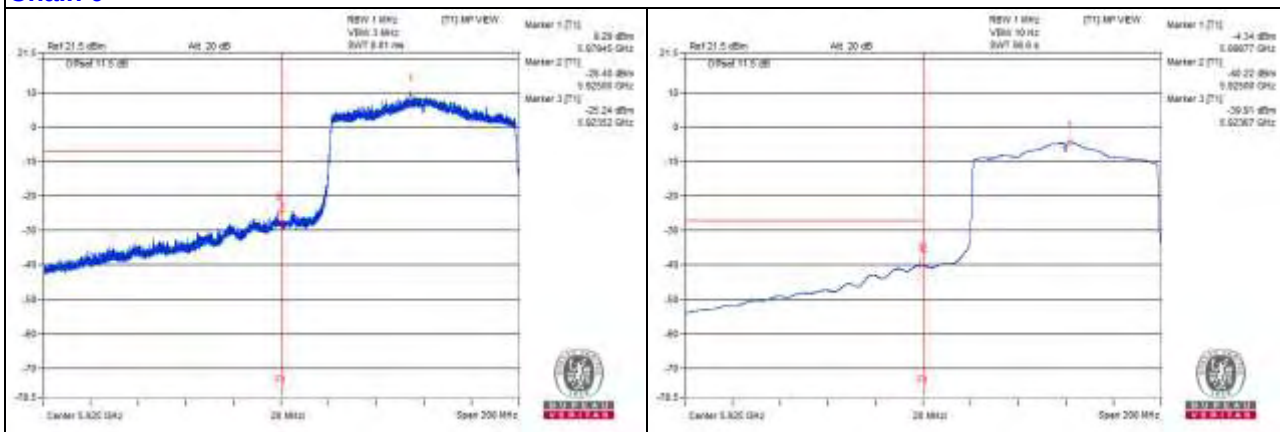

Chain 1

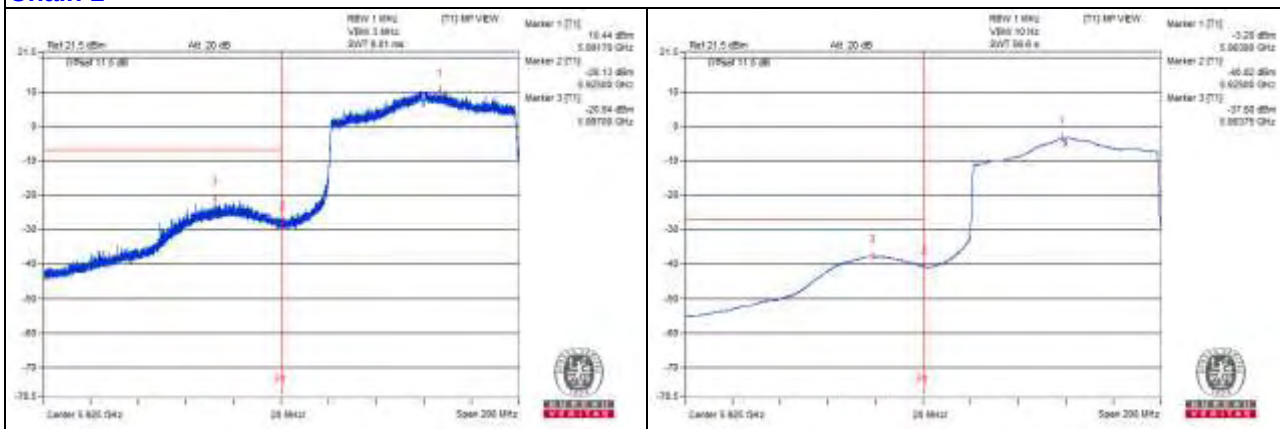

802.11ax (HE80) - Channel 39

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1943.75 PK	56	74	-18	-49.31	-51.98	8.17	-39.26
2	1937.5 AV	41.85	54	-12.15	-64.71	-64.48	8.17	-53.41
3	5484.37 PK	59.02	88.2	-29.18	-47.53	-47.31	8.17	-36.24
4	5481.25 AV	39.36	68.2	-28.84	-67	-67.17	8.17	-55.9
5	5759.37 PK	61.03	88.2	-27.17	-44.64	-46.35	8.17	-34.23
6	5759.37 AV	53.51	68.2	-14.69	-51.41	-55.29	8.17	-41.75
7	4100 PK	57.9	74	-16.1	-48.52	-48.56	8.17	-37.36
8	4095.31 AV	36.88	54	-17.12	-69.7	-69.42	8.17	-58.38
9	12285.93 PK	61.18	74	-12.82	-44.3	-46.5	8.17	-34.08
10	12290.62 AV	40.82	54	-13.18	-66.06	-65.23	8.17	-54.44
11	18433.5 PK	52.99	74	-21.01	-53.7	-53.22	8.17	-42.27
12	18430.62 AV	42.18	54	-11.82	-64.19	-64.34	8.17	-53.08

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

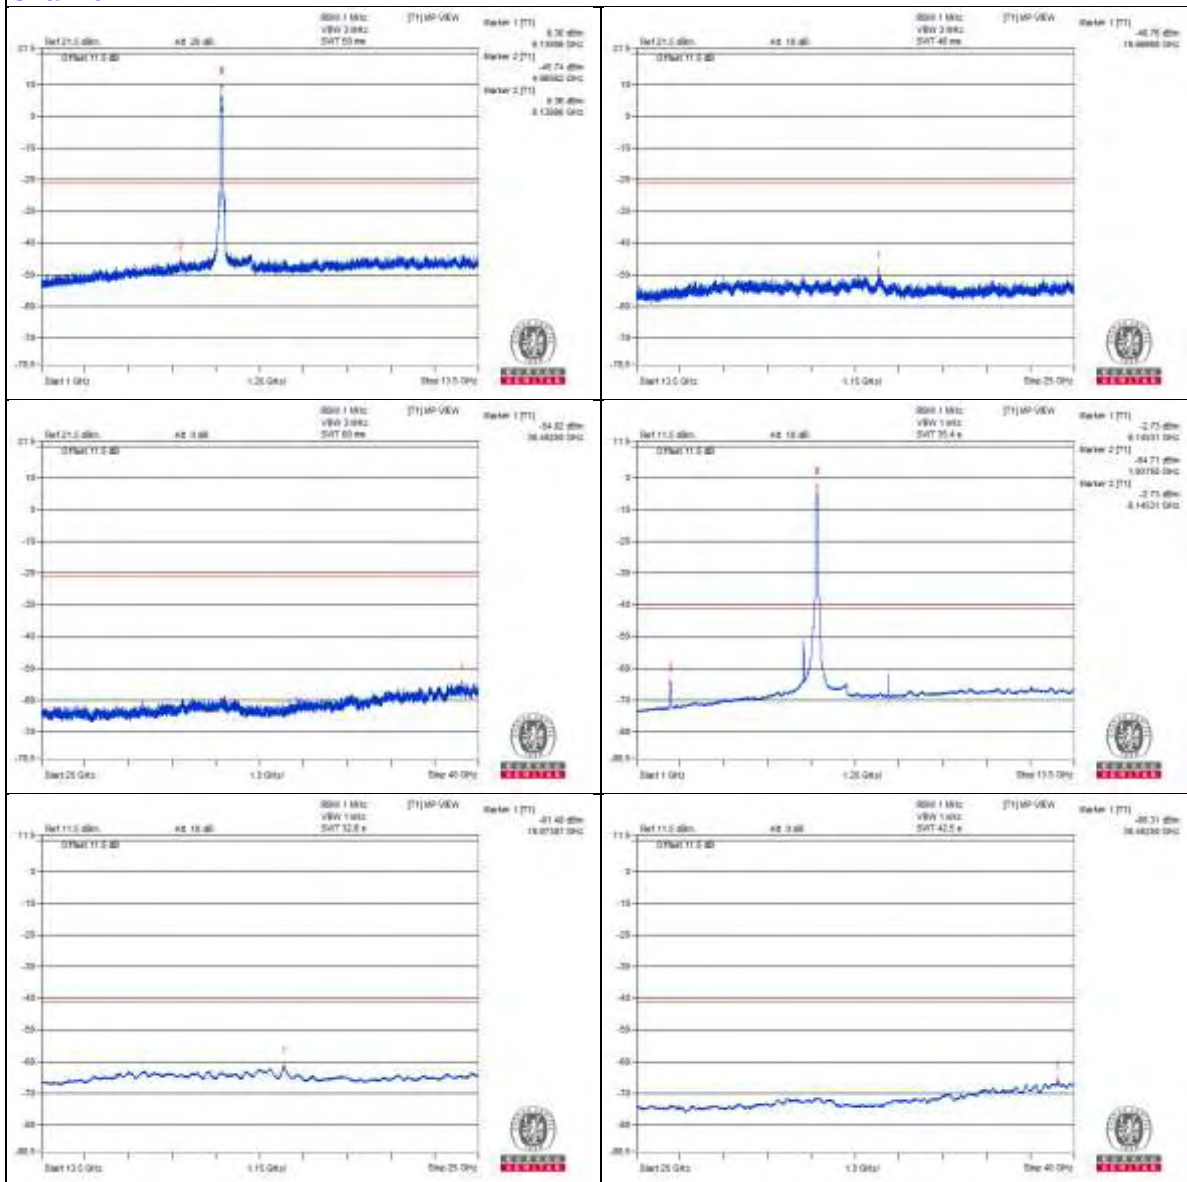

Chain 1

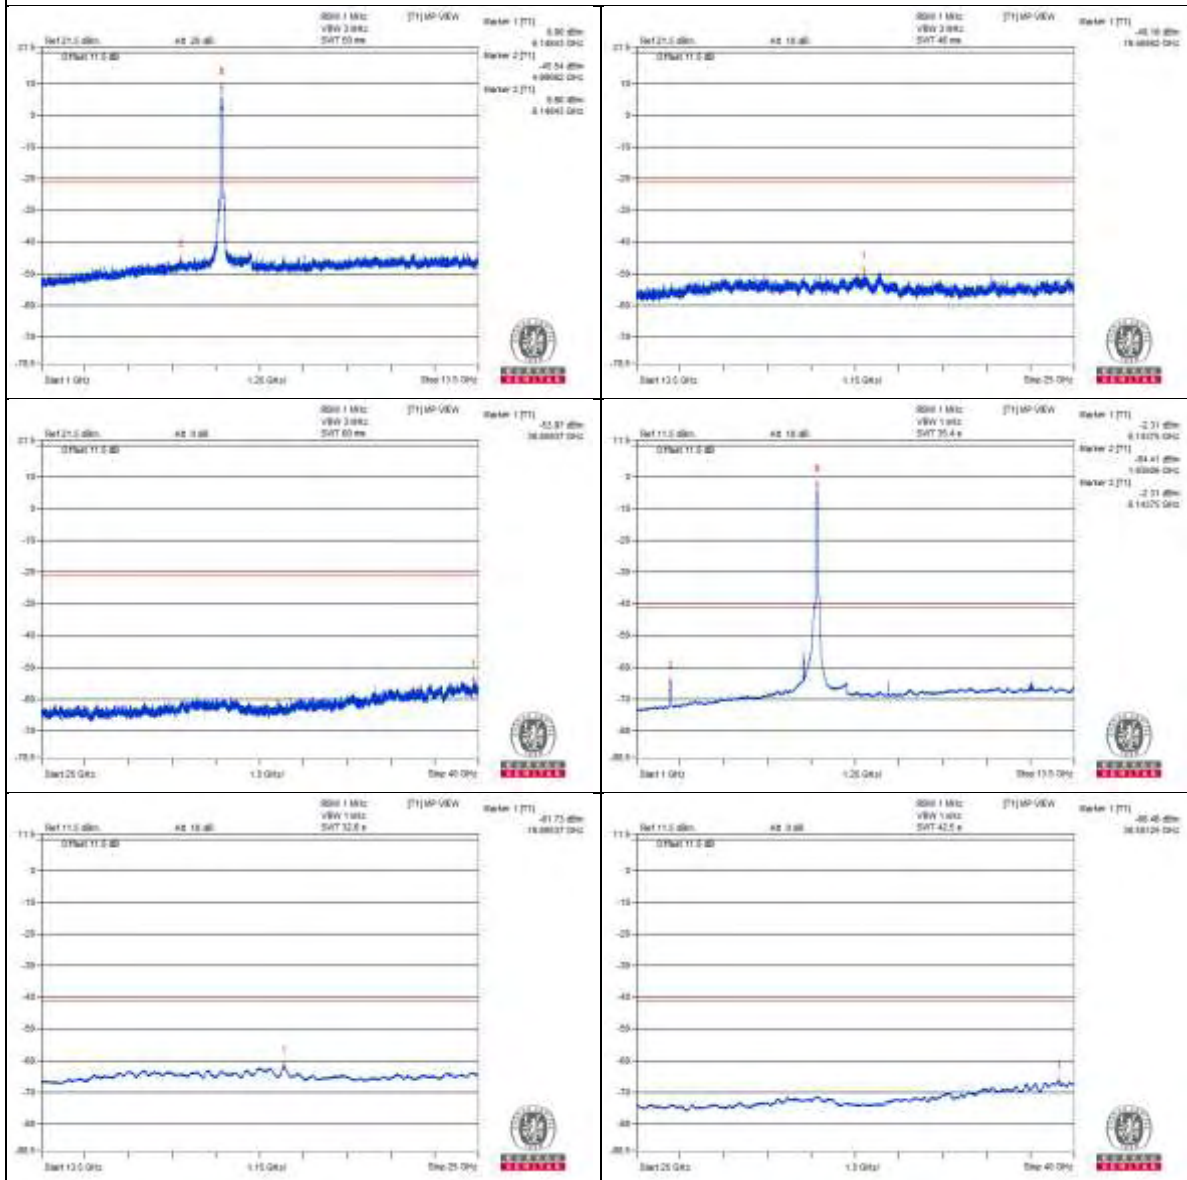

802.11ax (HE80) - Channel 87

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2184.37 PK	55.44	88.2	-32.76	-51.7	-50.39	8.17	-39.82
2	2178.12 AV	40.81	68.2	-27.39	-66.35	-65.02	8.17	-54.45
3	5485.93 PK	59.27	88.2	-28.93	-47.45	-46.9	8.17	-35.99
4	5482.81 AV	38.51	68.2	-29.69	-68.11	-67.76	8.17	-56.75
5	5759.37 PK	60.35	88.2	-27.85	-46.03	-46.16	8.17	-34.91
6	5759.37 AV	49.72	68.2	-18.48	-58.06	-55.7	8.17	-45.54
7	4254.68 PK	57.77	74	-16.23	-48.88	-48.47	8.17	-37.49
8	4256.25 AV	36.55	54	-17.45	-69.78	-70	8.17	-58.71
9	12765.62 PK	60.9	88.2	-27.3	-45.94	-45.18	8.17	-34.36
10	12771.87 AV	40.66	68.2	-27.54	-66.84	-64.93	8.17	-54.6
11	19159.43 PK	54.21	74	-19.79	-52.86	-51.68	8.17	-41.05
12	19158 AV	43.39	54	-10.61	-63.22	-62.88	8.17	-51.87

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

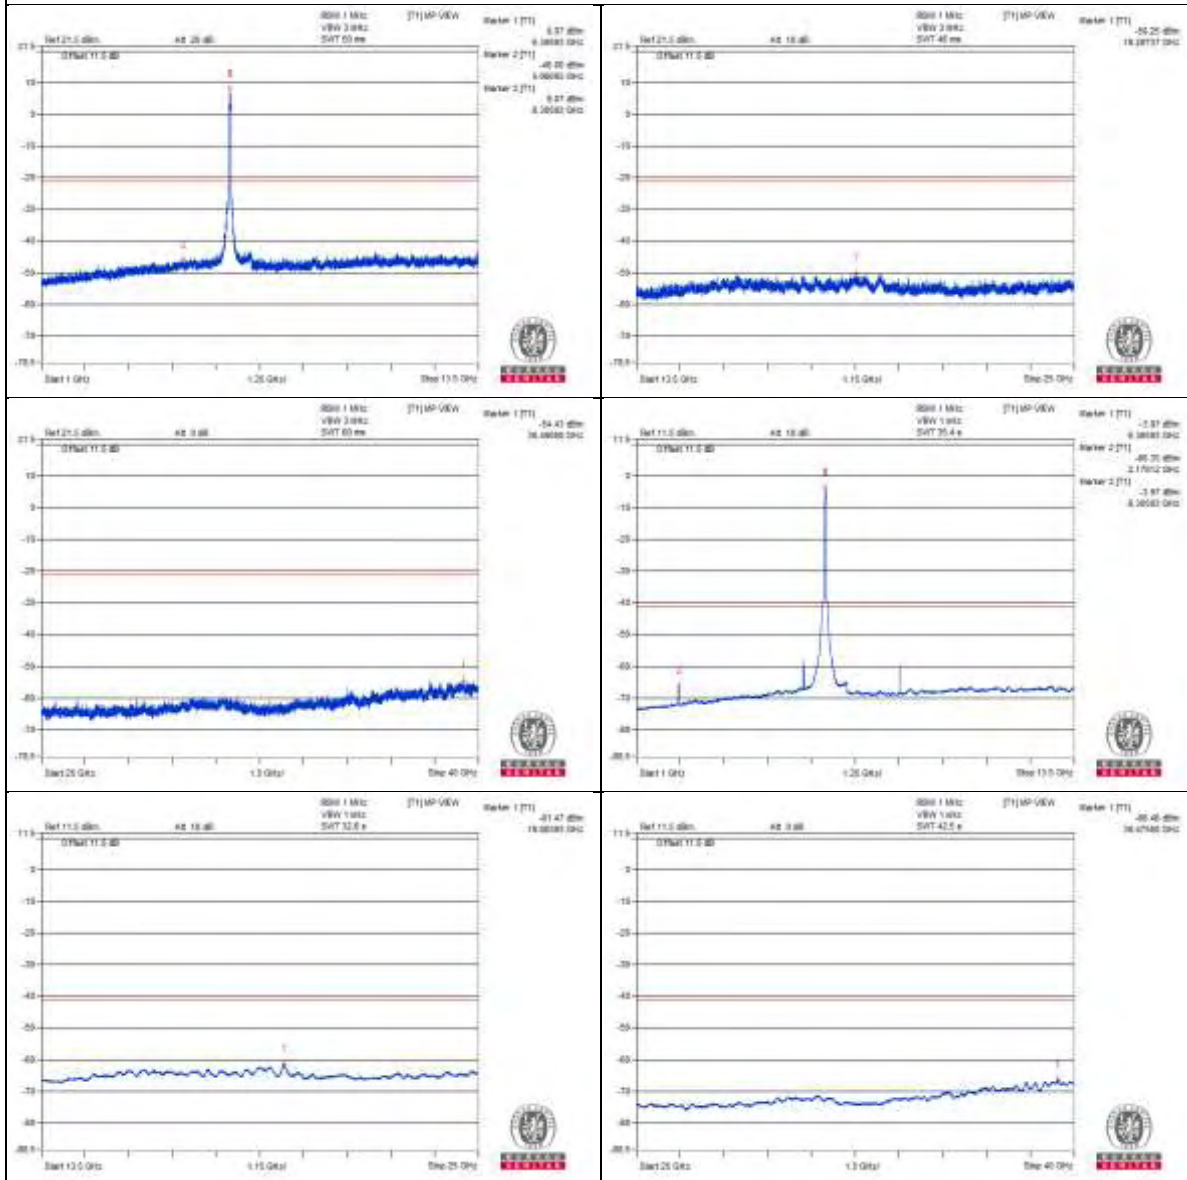

Chain 1

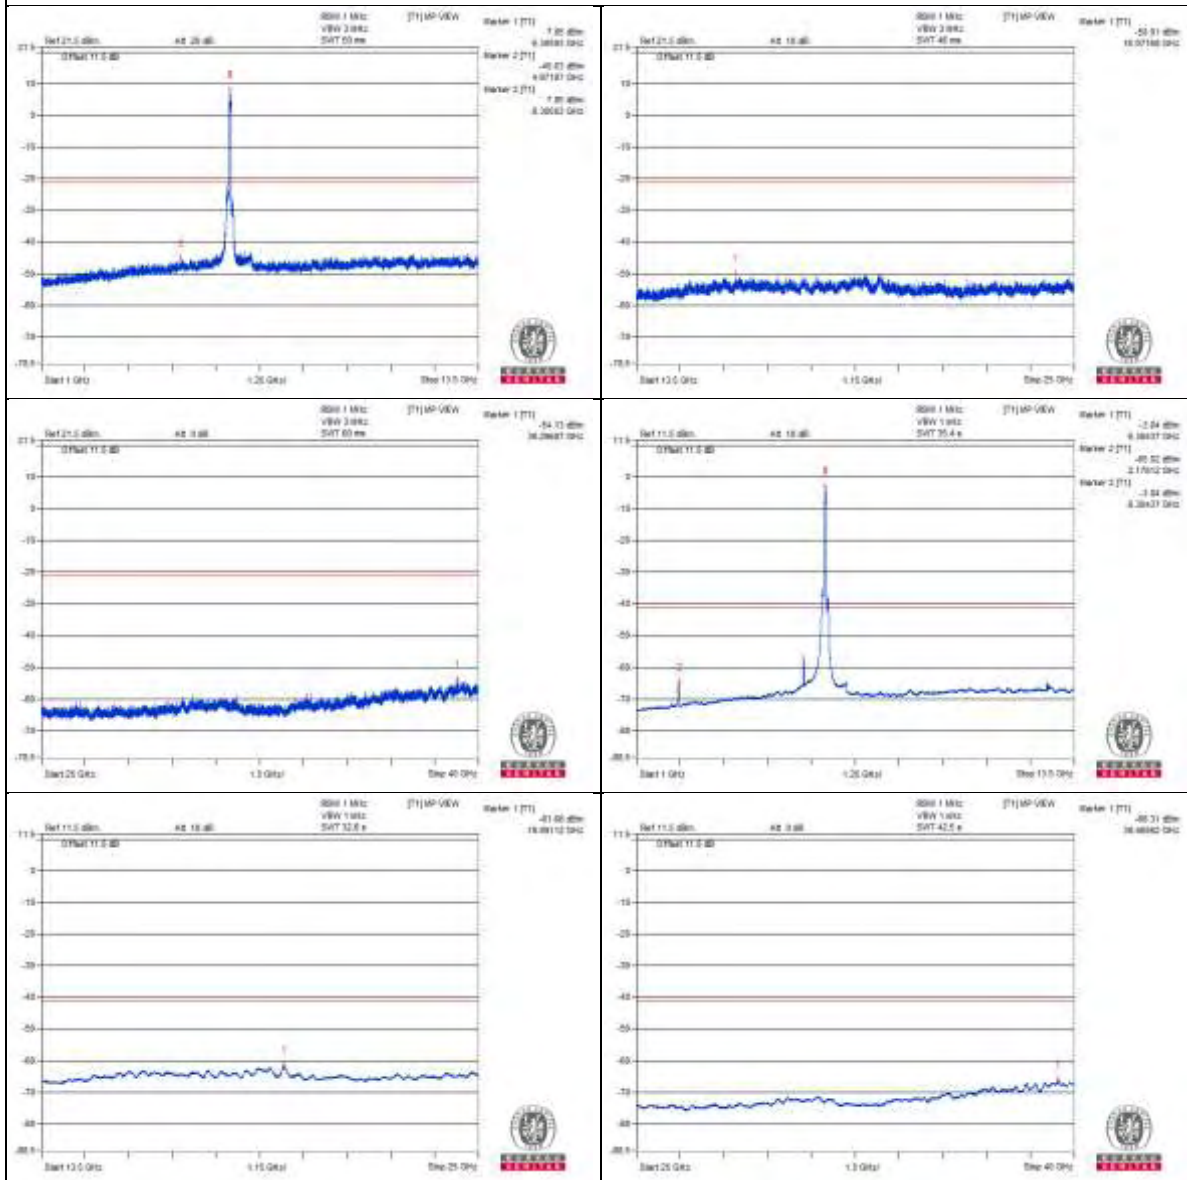

802.11ax (HE80) - Channel 135

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2421.87 PK	55.89	88.2	-32.31	-51.4	-49.84	8.17	-39.37
2	2420.31 AV	41.98	68.2	-26.22	-64.61	-64.32	8.17	-53.28
3	5487.5 PK	59.5	88.2	-28.7	-46.02	-48.12	8.17	-35.76
4	5485.93 AV	38.65	68.2	-29.55	-68.08	-67.52	8.17	-56.61
5	5759.37 PK	60.7	88.2	-27.5	-46.43	-45.14	8.17	-34.56
6	5759.37 AV	50.67	68.2	-17.53	-56.54	-55.11	8.17	-44.59
7	4417.18 PK	57.99	88.2	-30.21	-49.76	-47.44	8.17	-37.27
8	4417.18 AV	37.08	68.2	-31.12	-69.26	-69.46	8.17	-58.18
9	13254.68 PK	61.23	74	-12.77	-44.63	-45.88	8.17	-34.03
10	13251.56 AV	40.23	54	-13.77	-66.86	-65.65	8.17	-55.03
11	19872.43 PK	54.95	74	-19.05	-51.82	-51.19	8.17	-40.31
12	19873.87 AV	44.75	54	-9.25	-61.66	-61.72	8.17	-50.51

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

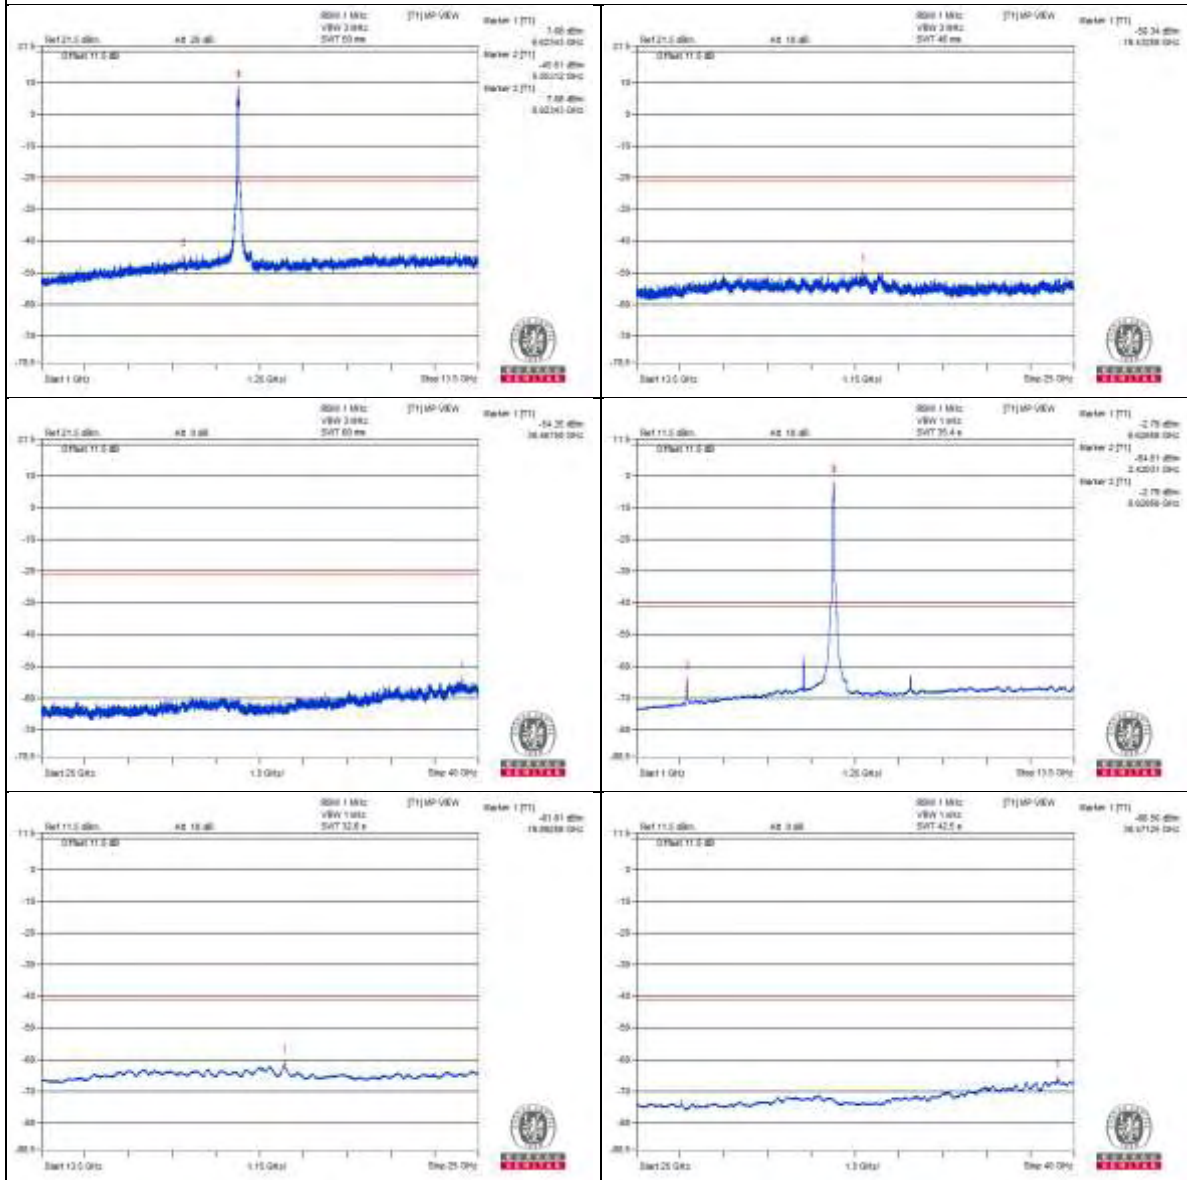

Chain 1

