

TEST REPORT


Applicant: Qualcomm Technologies, Inc.
Address: 5775 Morehouse Drive, San Diego, CA 92121-1714
Equipment Type: Wi-Fi 6E BT 5.2 M.2 2230 Module
Model Name: QCNFA765
Brand Name: N/A
FCC ID: J9C-QCNFA765
Test Standard: FCC 47 CFR Part 2.1093
(refer to section 3.1)
Maximum SAR: Body 2.4GHz(1 g): 0.98 W/kg
Body 5GHz(1 g): 1.18 W/kg
Body 6GHz(1 g): 0.63 W/kg
Limbs 2.4GHz(10 g): 0.69 W/kg
Limbs 5GHz(10 g): 0.37 W/kg
Limbs 6GHz(10 g): 0.53 W/kg
Sample Arrival Date: Dec. 12, 2024
Test Date: Dec. 17, 2024 - Jan. 08, 2025
Date of Issue: Feb. 05, 2025

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Xiong Lining**Checked by:** Xu Rui**Approved by:** Tolan Tu

(Testing Director)



Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Feb. 05, 2025</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory.....	4
1.2	Test Location	4
1.3	Test Environment Condition	4
2	PRODUCT INFORMATION.....	5
2.1	Applicant Information.....	5
2.2	Manufacturer Information	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Ancillary Equipment	5
2.5	Technical Information	6
3	SUMMARY OF TEST RESULT	7
3.1	Test Standards.....	7
3.2	Device Category and SAR Limit	8
3.3	Test Result Summary.....	9
3.4	Test Uncertainty	11
4	MEASUREMENT SYSTEM.....	12
4.1	Specific Absorption Rate (SAR) Definition	12
4.2	DASY SAR System	13
5	SYSTEM VERIFICATION.....	21
5.1	Purpose of System Check	21
5.2	System Check Setup.....	21
6	TEST POSITION CONFIGURATIONS	22
6.1	Laptop Exposure Condition	22
6.2	Product Specific 10g Exposure Consideration.....	23

7	MEASUREMENT PROCEDURE	24
7.1	Measurement Process Diagram	24
7.2	SAR Scan General Requirement	25
7.3	Measurement Procedure	26
7.4	Area & Zoom Scan Procedure	26
7.5	Interim Procedures for WIFI 6E	26
8	CONDUCTED RF OUPUT POWER	27
8.1	WIFI.....	27
8.2	Bluetooth	72
9	TEST EXCLUSION CONSIDERATION	73
9.1	Antenna Location Sketch.....	73
9.2	SAR Test Consideration Table	75
10	TEST RESULT	79
10.1	Bluetooth	80
10.2	WIFI 2.4GHz.....	81
10.3	WIFI 5GHz.....	82
10.4	WIFI 6GHz.....	84
11	SAR Measurement Variability.....	86
12	SIMULTANEOUS TRANSMISSION	87
12.1	Simultaneous Transmission Mode Considerations	88
12.2	Body Simultaneous Transmission SAR Evaluation.....	89
12.3	Limbs Simultaneous Transmission SAR Evaluation	89
13	TEST EQUIPMENTS LIST	91
ANNEX A	SIMULATING LIQUID VERIFICATION RESULT	92
ANNEX B	SYSTEM CHECK RESULT	93
ANNEX C	TEST DATA.....	118
ANNEX D	EUT EXTERNAL PHOTOS	170
ANNEX E	SAR TEST SETUP PHOTOS	170
ANNEX F	CALIBRATION REPORT.....	170
ANNEX G	TUNE-UP PROCEDURE.....	170

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☐ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☒ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

1.3 Test Environment Condition

Ambient Temperature	18°C to 25°C
Ambient Relative Humidity	30% to 70%

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Qualcomm Technologies, Inc.
Address	5775 Morehouse Drive, San Diego, CA 92121-1714

2.2 Manufacturer Information

Manufacturer	Qualcomm Technologies, Inc.
Address	5775 Morehouse Drive, San Diego, CA 92121-1714

2.3 General Description for Equipment under Test (EUT)

EUT Name	Wi-Fi 6E BT 5.2 M.2 2230 Module
Model Name Under Test	QCNFA765
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.3.1 Host Information:

Product Name	Notebook Computer
Model Name	IdeaPad Slim 3 15Q8X10
Brand Name	Lenovo

2.3.2 Antenna Information:

Antenna Port	Model Name	Antenna Manufacturer	Antenna Type	Antenna Gain (dBi)								
				2.4 GHz	5.15-5.25 GHz	5.25-5.35 GHz	5.47-5.725 GHz	5.725-5.895 GHz	5.925-6.425 GHz	6.425 - 6.525 GHz	6.525 - 6.875 GHz	6.875 - 7.125 GHz
Main Antenna	DC330028N00	Luxshare-ict	PIFA	1.29	2.43	2.43	2.74	2.87	3.87	3.75	3.75	3.71
Auxiliary Antenna	DC330028N10		PIFA	2.33	2.91	2.93	2.80	2.28	3.71	4.16	4.17	3.44
Main Antenna	DC330028P00	ZTX	PIFA	1.91	2.82	3.02	3.52	3.41	3.22	3.12	3.47	3.03
Auxiliary Antenna	DC330028P10		PIFA	2.31	3.01	3.01	3.18	3.28	3.59	3.59	3.30	2.87

2.4 Ancillary Equipment

Note: Not applicable.

2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n, VHT, 802.11ac and 802.11ax
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	2.4G WLAN; 5G WLAN; 6G WLAN; Bluetooth	
Frequency Range	802.11b/g	2412 ~ 2472 MHz
	VHT20/VHT40	2412 ~ 2472 MHz
	802.11ax(HE20/HE40)	2412 ~ 2472 MHz
	802.11a	5150 ~ 5250 MHz
		5250 ~ 5350 MHz
		5470 ~ 5725 MHz
		5725 ~ 5850 MHz
		5815 ~ 5885 MHz
	802.11n(HT20/HT40)	5150 ~ 5250 MHz
		5250 ~ 5350 MHz
		5470 ~ 5725 MHz
		5725 ~ 5850 MHz
		5815 ~ 5885 MHz
	802.11ac(VHT20/VHT40/VHT80)	5150 ~ 5250 MHz
		5250 ~ 5350 MHz
		5470 ~ 5725 MHz
		5725 ~ 5850 MHz
		5815 ~ 5885 MHz
	802.11ax(HE20/HE40/HE80)	5150 ~ 5250 MHz
		5250 ~ 5350 MHz
		5470 ~ 5725 MHz
		5725 ~ 5850 MHz
		5815 ~ 5885 MHz
	802.11ac(VHT160)/ 802.11ax(HE160)	5150 ~ 5250 MHz
		5470 ~ 5725 MHz
		5815 ~ 5885 MHz
	802.11a/ 802.11ax(HE20/HE40/HE80/ HE160)	5925 ~ 6425 MHz
		6425 ~ 6525 MHz
		6525 ~ 6875 MHz
		6875 ~ 7125 MHz
	Bluetooth	2402 ~ 2480 MHz
Antenna Type	WLAN	PIFA
	Bluetooth	PIFA
Hotspot Function	N/A	
Exposure Category	General Population/Uncontrolled exposure	
Product Type	Portable Device	
EUT Type	☒ Production unit	☐ Identical prototype

3 SUMMARY OF TEST RESULT

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices
2	ANSI C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	KDB 447498 D04 v01	447498 D04 Interim General RF Exposure Guidance v01
4	KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
5	KDB 865664 D02 v01r02	RF Exposure Reporting
6	KDB 248227 D01 v02r02	SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters
7	KDB 616217 D04 v01r02	SAR for laptop and tablets
8	IEC/IEEE 62209-1528:2020	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)

3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user.

Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Table of Exposure Limits:

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:

General Population/Uncontrolled Exposure: Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Occupational/Controlled Exposure: Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure. In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

3.3 Test Result Summary

3.3.1 Highest SAR (1 g Value)

Equipment Class	Band	Antenna	Maximum Scaled SAR (W/kg)	Maximum Report SAR (W/kg)	
			Body (0mm)	Body (0mm)	
DTS	2.4G WIFI	Aux.	0.98	1.18	
	2.4G WIFI	Main	0.47		
U-NII-2A	5.3G WIFI	Aux.	1.18		
	5.3G WIFI	Main	0.32		
U-NII-2C	5.6G WIFI	Aux.	1.14		
	5.6G WIFI	Main	0.32		
U-NII-3	5.8G WIFI	Aux.	1.15		
	5.8G WIFI	Main	0.31		
U-NII-4	5.9G WIFI	Aux.	0.58		
	5.9G WIFI	Main	0.37		
U-NII-5/6/7/8	6G WIFI	Aux.	0.63		
	6G WIFI	Main	0.62		
DSS	Bluetooth	Aux.	0.24		
Limit (W/kg)			1.60		
Verdict			Pass		

3.3.2 Highest Simultaneous Transmission SAR Values (1 g Value)

Equipment Class	Maximum Report SAR (W/kg)	SPLSR
	Body (0mm)	
DTS	2.46	0.04
NII	2.46	0.04
DSS	1.21	/
Limit (W/kg)	1.60	0.04
Verdict	Pass	Pass

Note: The simultaneous transmission SAR detail please refer to section 12.

3.3.3 Highest SAR (10 g Value)

Equipment Class	Band	Antenna	Maximum Scaled SAR (W/kg)	Maximum Report SAR (W/kg)	
			Limbs (0mm)	Limbs (0mm)	
DTS	2.4G WIFI	Aux.	0.55	0.69	
	2.4G WIFI	Main	0.69		
U-NII-2A	5.3G WIFI	Aux.	0.33		
	5.3G WIFI	Main	0.34		
U-NII-2C	5.6G WIFI	Aux.	0.31		
	5.6G WIFI	Main	0.29		
U-NII-3	5.8G WIFI	Aux.	0.37		
	5.8G WIFI	Main	0.34		
U-NII-4	5.9G WIFI	Aux.	0.16		
	5.9G WIFI	Main	0.32		
U-NII-5/6/7/8	6G WIFI	Aux.	0.49		
	6G WIFI	Main	0.53		
DSS	Bluetooth	Aux.	0.15		
Limit (W/kg)			4.00		
Verdict			Pass		

3.3.4 Highest Simultaneous Transmission SAR Values (10 g Value)

Equipment Class	Maximum Report SAR (W/kg)	SPLSR
	Limbs (0mm)	
DTS	2.25	/
NII	2.25	/
DSS	1.14	/
Limit (W/kg)	4.00	0.04
Verdict	Pass	Pass

Note: The simultaneous transmission SAR detail please refer to section 12.

3.4 Test Uncertainty

According to KDB 865664 D01, when the highest measured 1 g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis is not required in SAR reports submitted for equipment approval.

The maximum 1 g SAR for the EUT in this report is 1.18 W/kg, which is lower than 1.5 W/kg, so the extensive SAR measurement uncertainty analysis is not required in this report.

The maximum 10 g SAR for the EUT in this report is 0.69 W/kg, which is lower than 3.75 W/kg, so the extensive SAR measurement uncertainty analysis is not required in this report.

4 MEASUREMENT SYSTEM

4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,

ρ is the mass density of the tissue and E is the RMS electrical field strength.

4.2 DASY SAR System

4.2.1 DASY SAR System Diagram

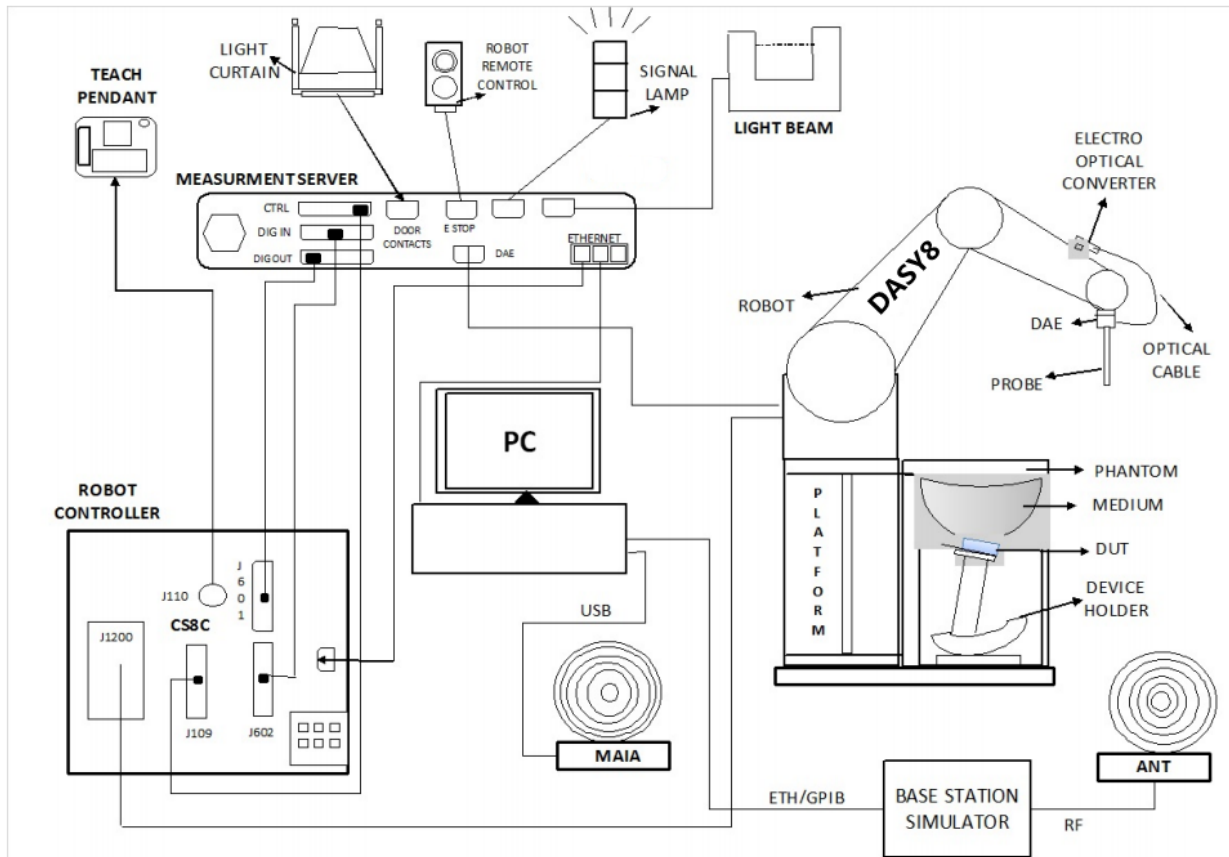


The DASY system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY measurement server.
6. The DASY measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
7. DASY software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

4.2.2 Robot

The Dasy SAR system uses the high precision robots. Symmetrical design with triangular core Built-in optical fiber for surface detection system For the 6-axis controller system, Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents). The robot series have many features that are important for our application:

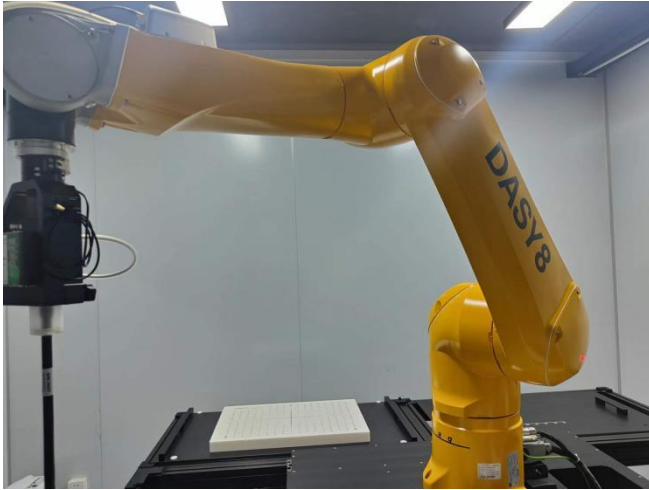

- High precision
(repeatability ± 0.02 mm)
- High reliability
(industrial design)
- Low maintenance costs
(virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements
(brush less synchron motors; no stepper motors)
- Low ELF interference
(motor control _elds shielded via the closed metallic construction shields)

4.2.3 E-Field Probe

The probe is specially designed and calibrated for use in liquids with high permittivities for the measurements the Specific Dosimetric E-Field Probe EX3DV4 SN: 7893 & EX3DV4 SN: 7510 with following specifications is used.

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)
Calibration	ISO/IEC 17025 calibration service available
Frequency	4 MHz to 10 GHz; Linearity: ± 0.2 dB
Directivity	± 0.2 dB in HSL (rotation around probe axis); ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 9 mm) Tip diameter: 2.5 mm (Body: 10 mm) Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms (EX3DV4)



E-Field Probe Calibration Process

Probe calibration is realized, in compliance with IEC/IEEE 62209-1528 and IEEE 1528 std, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the IEC/IEEE 62209-1528 annexe technique using reference guide at the five frequencies.

4.2.4 Data Acquisition Electronics


The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.



- Input Impedance: 200M Ω m
- The Inputs: Symmetrical and Floating
- Commom Mode Rejection: Above 80dB

4.2.5 Phantoms

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of below 10 GHz. ELI V8.0 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI V8.0 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points.

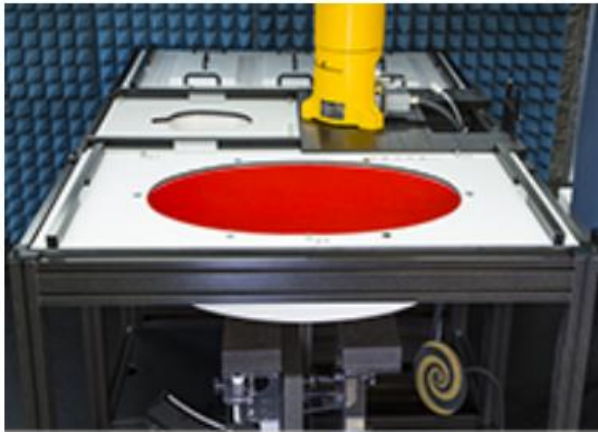

• Flat phantom

Photo of Phantom SN2159**Photo of Phantom SN2162**

Serial Number	Shell Thickness (mm)	Major ellipse axis (mm)	Minor axis(mm)
SN 2159 ELI V8.0	2.0 ± 0.2	600	400
SN 2162 ELI V8.0	2.0 ± 0.2	600	400

4.2.6 Device Holder


The DASY device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used. Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.



The positioning system allows obtaining cheek and tilting position with a very good accuracy. Incompliance with CENELEC, the tilt angle uncertainty is lower than 1° .

4.2.7 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

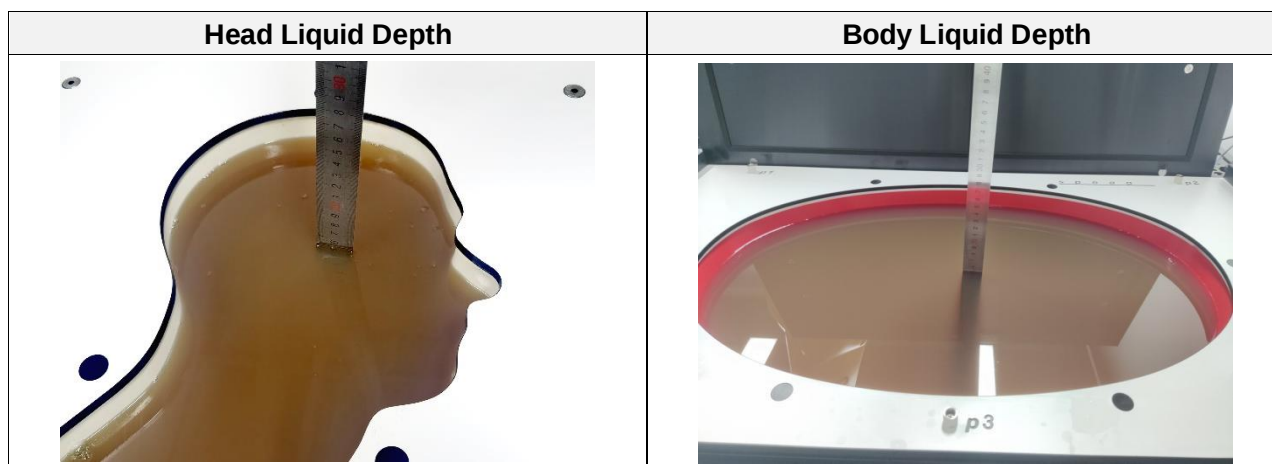

The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.

The following table gives the recipes for tissue simulating liquid.

TSL	Manufacturer / Model	Freq Range (MHz)	Main Ingredients
Head WideBand	SPEAG HBBL600-10000V6	600-10000	Ethenediol, Sodium petroleum sulfonate, Hexylene Glycol / 2-Methyl-pentane-2.4-diol, Alkoxylated alcohol


5 SYSTEM VERIFICATION

5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

5.2 System Check Setup


In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

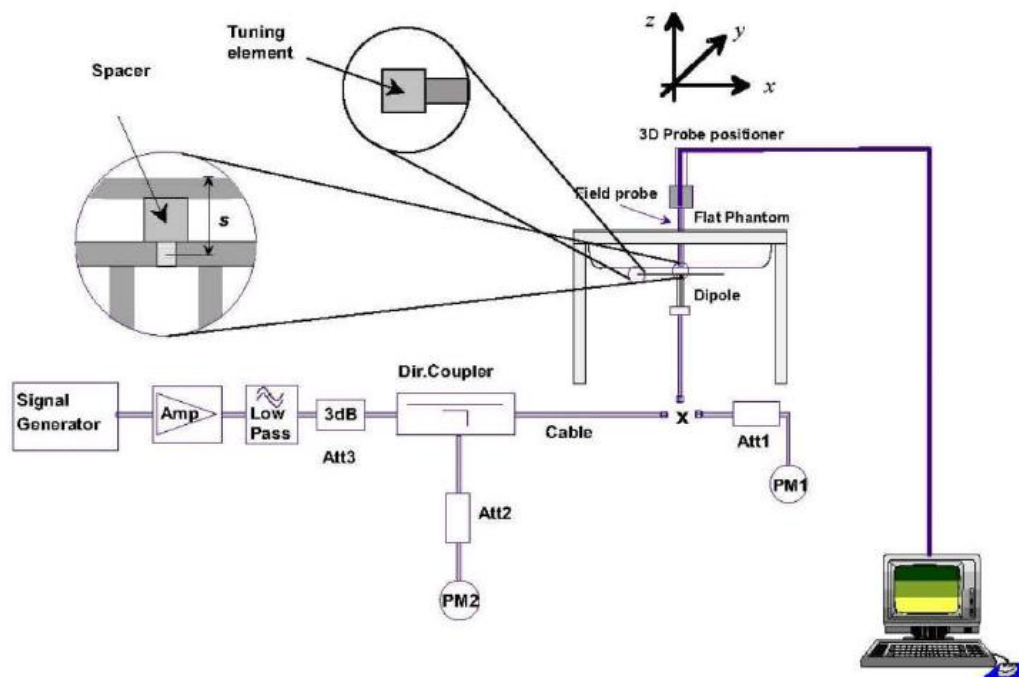

6 TEST POSITION CONFIGURATIONS

6.1 Laptop Exposure Condition

This DUT should consider one position which is bottom of laptop touching with phantom 0 mm air gap and the screen portion of the device shall be an open position at a 90° angle.

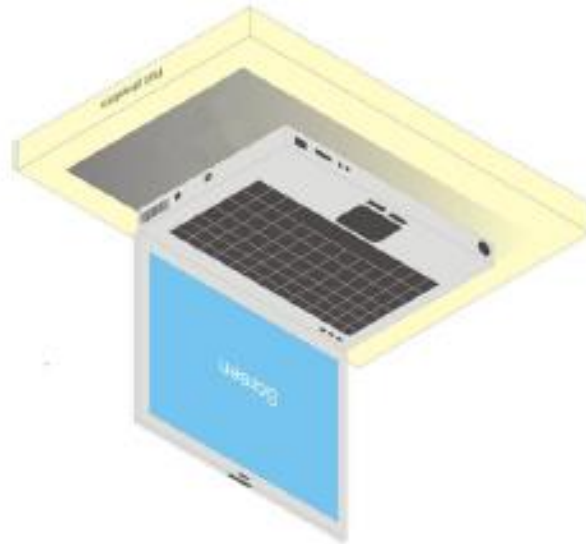


6.2 Product Specific 10g Exposure Consideration

According with FCC KDB 648474 D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance;

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

7 MEASUREMENT PROCEDURE

7.1 Measurement Process Diagram

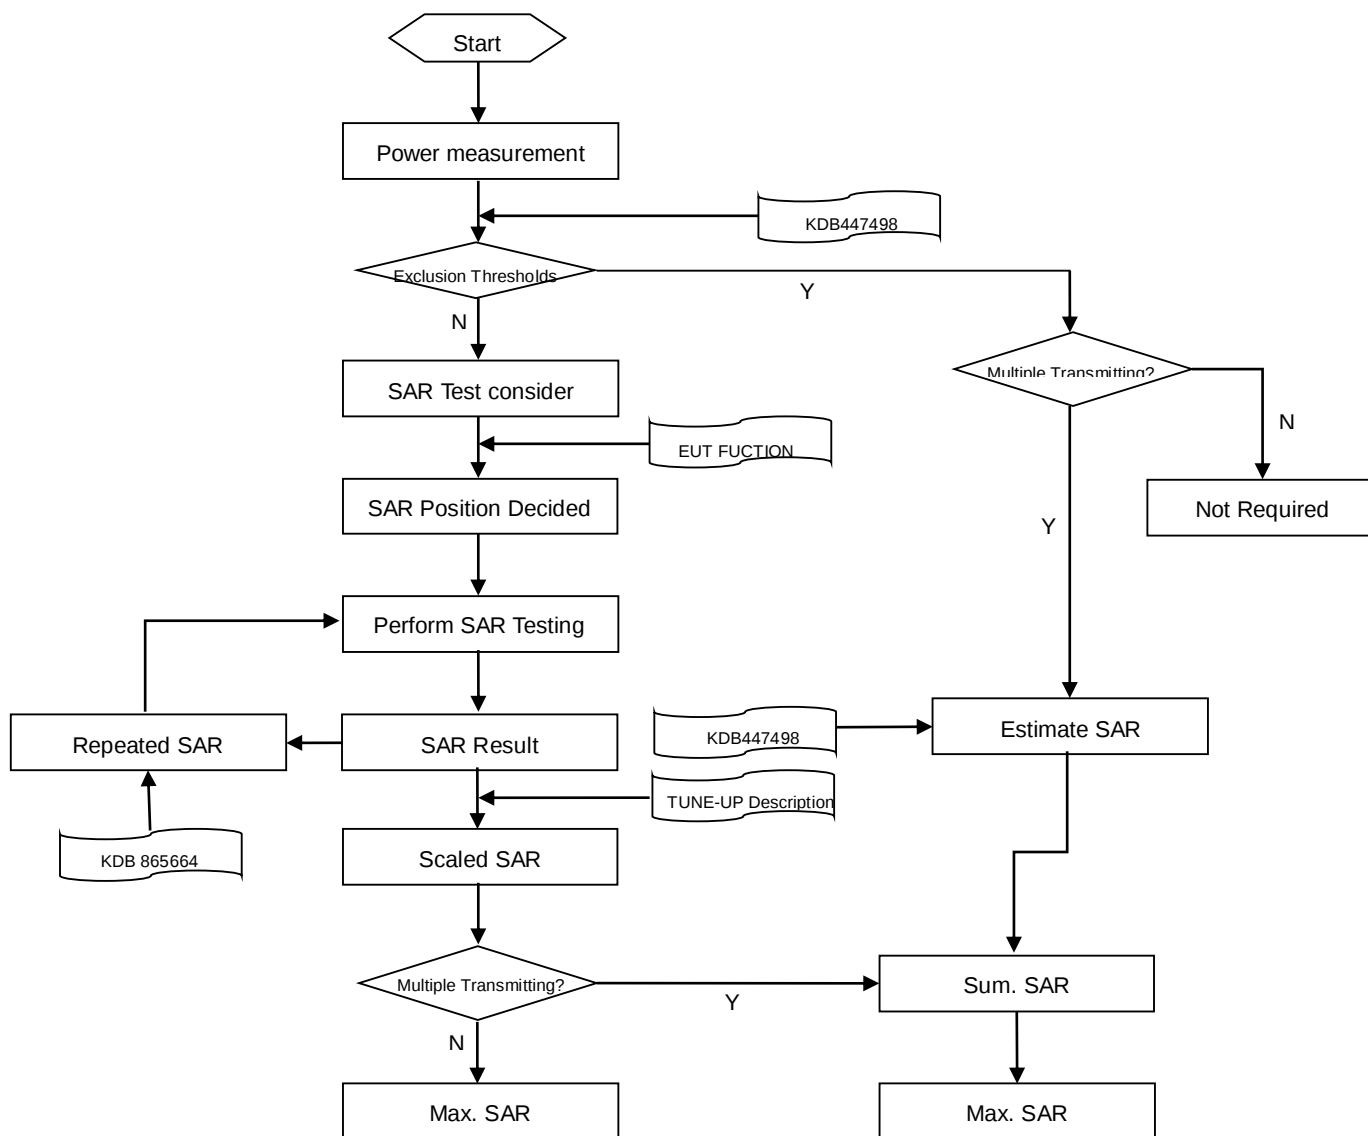

7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

			≤3GHz	>3GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5±1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30°±1°	20°±1°
Maximum area scan spatial resolution: Δx Area , Δy Area			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx Zoom , Δy Zoom			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz Zoom (n)		≤ 5 mm	3–4 GHz: ≤ 4 mm
				4–5 GHz: ≤ 3 mm
				5–6 GHz: ≤ 2 mm
	graded grid	Δz Zoom (1): between 1st two points closest to phantom surface	≤ 4 mm	3–4 GHz: ≤ 3 mm
				4–5 GHz: ≤ 2.5 mm
				5–6 GHz: ≤ 2 mm
	Δz Zoom (n>1): between subsequent points		≤ 1.5· Δz Zoom (n-1)	
Minimum zoom scan volume	x, y, z		≥30 mm	3–4 GHz: ≥ 28 mm
				4–5 GHz: ≥ 25 mm
				5–6 GHz: ≥ 22 mm

Note:

1. δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.
2. * When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

7.5 Interim Procedures for WIFI 6E

Interim procedures for FCC radio frequency (RF) exposure evaluations of U-NII 6-7 GHz band portable devices have been made available during the TCB workshop in April 2021. The procedure is summarized below:

- a. Evaluate SAR / APD with DASY6 Module SAR V16.0 or higher. The configurations to be tested are defined in the relevant Knowledge Database (KDB). The psSAR and absorbed psPD are reported.
- b. For the configuration with the highest SAR, evaluate the incident power density with DASY6 Module mmWave V2.4.2 or higher. The incident psPD must be adjusted per amount that the measurement uncertainty exceeds 30% before it is included in the test report.

8 CONDUCTED RF OUPUT POWER

8.1 WIFI

8.1.1 2.4G WIFI (Aux. Antenna) (Laptop Mode)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
2.4	802.11b	1	2412	15.21	15.50	Yes
		6	2437	15.18	15.50	Yes
		11	2462	15.16	15.50	Yes
		12	2467	14.56	15.50	No
		13	2472	14.28	14.50	No
	802.11g	1	2412	12.23	13.00	No
		2	2417	14.63	15.00	No
		6	2437	15.08	15.50	No
		10	2457	14.94	15.50	No
		11	2462	14.63	15.00	No
		12	2467	12.08	12.50	No
		13	2472	2.44	2.50	No
	VHT20	1	2412	10.43	11.00	No
		2	2417	13.09	14.00	No
		6	2437	13.56	14.00	No
		10	2457	13.59	14.00	No
		11	2462	13.72	14.00	No
		12	2467	10.78	11.50	No
		13	2472	0.60	1.50	No
	VHT40	3	2422	9.31	10.00	No
		4	2427	10.72	11.00	No
		6	2437	12.54	13.00	No
		8	2447	11.75	12.00	No
		9	2452	11.75	12.00	No
		10	2457	11.39	12.00	No
		11	2462	3.83	4.00	No
	802.11ax(HE20) (SU)	1	2412	10.07	11.00	No
		2	2417	13.11	14.00	No
		6	2437	13.51	14.00	No
		10	2457	13.59	14.00	No
		11	2462	13.61	14.00	No
		12	2467	10.85	11.50	No
		13	2472	1.04	1.50	No
	802.11ax(HE40) (SU)	3	2422	9.24	10.00	No
		4	2427	10.34	11.00	No

		6	2437	12.23	13.00	No
		8	2447	11.06	12.00	No
		9	2452	11.49	12.00	No
		10	2457	11.68	12.00	No
		11	2462	3.48	4.00	No
	802.11ax(HE20) (RU26)/0	1	2412	10.29	11.00	No
	802.11ax(HE20) (RU26)/0	2	2417	13.27	14.00	No
	802.11ax(HE20) (RU26)/4	6	2437	13.66	14.00	No
	802.11ax(HE20) (RU26)/4	10	2457	13.11	14.00	No
	802.11ax(HE20) (RU26)/8	11	2462	13.66	14.00	No
	802.11ax(HE20) (RU26)/8	12	2467	10.29	11.00	No
	802.11ax(HE20) (RU26)/8	13	2472	-10.38	-10.00	No
	802.11ax(HE20) (RU52)/37	1	2412	10.44	11.00	No
	802.11ax(HE20) (RU52)/37	2	2417	13.50	14.00	No
	802.11ax(HE20) (RU52)/39	6	2437	13.81	14.00	No
	802.11ax(HE20) (RU52)/39	10	2457	12.76	13.00	No
	802.11ax(HE20) (RU52)/40	11	2462	12.21	13.00	No
	802.11ax(HE20) (RU52)/40	12	2467	9.16	10.00	No
	802.11ax(HE20) (RU52)/40	13	2472	-10.74	-10.00	No
	802.11ax(HE20) (RU106)/53	1	2412	10.56	11.00	No
	802.11ax(HE20) (RU106)/53	2	2417	13.47	14.00	No
	802.11ax(HE20) (RU106)/53	6	2437	13.32	14.00	No
	802.11ax(HE20) (RU106)/54	10	2457	12.23	13.00	No
	802.11ax(HE20) (RU106)/54	11	2462	11.20	11.50	No

802.11ax(HE20) (RU106)/54	12	2467	9.39	10.00	No
802.11ax(HE20) (RU106)/54	13	2472	-8.92	-8.00	No
802.11ax(HE20) (RU242)/61	1	2412	8.18	8.50	No
802.11ax(HE20) (RU242)/61	2	2417	13.18	14.00	No
802.11ax(HE20) (RU242)/61	6	2437	13.50	14.00	No
802.11ax(HE20) (RU242)/61	10	2457	10.26	10.50	No
802.11ax(HE20) (RU242)/61	11	2462	10.20	10.50	No
802.11ax(HE20) (RU242)/61	12	2467	8.24	8.50	No
802.11ax(HE20) (RU242)/61	13	2472	-7.22	-6.50	No
802.11ax(HE40) (RU484)/65	3	2422	8.67	9.50	No
802.11ax(HE40) (RU484)/65	4	2427	9.41	10.00	No
802.11ax(HE40) (RU484)/65	6	2437	13.35	14.00	No
802.11ax(HE40) (RU484)/65	8	2447	10.38	11.00	No
802.11ax(HE40) (RU484)/65	9	2452	10.13	11.00	No
802.11ax(HE40) (RU484)/65	10	2457	9.28	9.50	No
802.11ax(HE40) (RU484)/65	11	2462	-5.32	-5.00	No

Note: According KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Adjusted SAR = Report SAR * (max power (OFDM)/ max power (DSSS)) = 0.979 * (35.48mW/35.48mW) = 0.979 W/Kg, so the 2.4G OFDM SAR test is not required.

8.1.2 2.4G WIFI (Main Antenna) (Laptop Mode)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
2.4	802.11b	1	2412	15.45	15.50	Yes
		6	2437	15.15	15.50	Yes
		11	2462	15.15	15.50	Yes
		12	2467	15.20	15.50	No
		13	2472	14.41	14.50	No
	802.11g	1	2412	12.62	13.00	No
		2	2417	14.72	15.00	No
		6	2437	15.04	15.50	No
		10	2457	15.33	15.50	No
		11	2462	14.81	15.00	No
		12	2467	11.69	12.50	No
		13	2472	2.10	2.50	No
	VHT20	1	2412	10.32	11.00	No
		2	2417	13.60	14.00	No
		6	2437	13.82	14.00	No
		10	2457	13.34	14.00	No
		11	2462	13.14	14.00	No
		12	2467	10.66	11.50	No
		13	2472	0.84	1.50	No
	VHT40	3	2422	9.32	10.00	No
		4	2427	10.52	11.00	No
		6	2437	12.32	13.00	No
		8	2447	11.72	12.00	No
		9	2452	11.76	12.00	No
		10	2457	11.30	12.00	No
		11	2462	3.13	4.00	No
	802.11ax(HE20) (SU)	1	2412	10.58	11.00	No
		2	2417	13.17	14.00	No
		6	2437	13.37	14.00	No
		10	2457	13.43	14.00	No
		11	2462	13.47	14.00	No
		12	2467	11.01	11.50	No
		13	2472	1.08	1.50	No
	802.11ax(HE40) (SU)	3	2422	9.65	10.00	No
		4	2427	10.79	11.00	No
		6	2437	12.23	13.00	No
		8	2447	11.73	12.00	No
		9	2452	11.80	12.00	No
		10	2457	11.06	12.00	No

		11	2462	3.40	4.00	No
	802.11ax(HE20) (RU26)/0	1	2412	10.80	11.00	No
	802.11ax(HE20) (RU26)/0	2	2417	13.21	14.00	No
	802.11ax(HE20) (RU26)/4	6	2437	13.71	14.00	No
	802.11ax(HE20) (RU26)/4	10	2457	13.67	14.00	No
	802.11ax(HE20) (RU26)/8	11	2462	13.55	14.00	No
	802.11ax(HE20) (RU26)/8	12	2467	10.50	11.00	No
	802.11ax(HE20) (RU26)/8	13	2472	-12.56	-11.00	No
	802.11ax(HE20) (RU52)/37	1	2412	10.34	11.00	No
	802.11ax(HE20) (RU52)/37	2	2417	13.45	14.00	No
	802.11ax(HE20) (RU52)/39	6	2437	13.28	14.00	No
	802.11ax(HE20) (RU52)/39	10	2457	12.80	13.00	No
	802.11ax(HE20) (RU52)/40	11	2462	12.50	13.00	No
	802.11ax(HE20) (RU52)/40	12	2467	9.20	10.00	No
	802.11ax(HE20) (RU52)/40	13	2472	-11.00	-10.00	No
	802.11ax(HE20) (RU106)/53	1	2412	10.36	11.00	No
	802.11ax(HE20) (RU106)/53	2	2417	13.06	14.00	No
	802.11ax(HE20) (RU106)/53	6	2437	13.56	14.00	No
	802.11ax(HE20) (RU106)/54	10	2457	12.32	13.00	No
	802.11ax(HE20) (RU106)/54	11	2462	11.34	11.50	No
	802.11ax(HE20) (RU106)/54	12	2467	9.48	10.00	No
	802.11ax(HE20) (RU106)/54	13	2472	-8.96	-8.00	No

802.11ax(HE20) (RU242)/61	1	2412	7.93	8.50	No
802.11ax(HE20) (RU242)/61	2	2417	13.26	14.00	No
802.11ax(HE20) (RU242)/61	6	2437	13.13	14.00	No
802.11ax(HE20) (RU242)/61	10	2457	10.16	10.50	No
802.11ax(HE20) (RU242)/61	11	2462	10.06	10.50	No
802.11ax(HE20) (RU242)/61	12	2467	7.66	8.50	No
802.11ax(HE20) (RU242)/61	13	2472	-7.01	-6.50	No
802.11ax(HE40) (RU484)/65	3	2422	8.98	9.50	No
802.11ax(HE40) (RU484)/65	4	2427	9.14	10.00	No
802.11ax(HE40) (RU484)/65	6	2437	13.83	14.00	No
802.11ax(HE40) (RU484)/65	8	2447	10.30	11.00	No
802.11ax(HE40) (RU484)/65	9	2452	10.15	11.00	No
802.11ax(HE40) (RU484)/65	10	2457	9.14	9.50	No
802.11ax(HE40) (RU484)/65	11	2462	-5.91	-5.00	No

Note: According KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Adjusted SAR = Report SAR * (max power (OFDM)/ max power (DSSS)) = 0.470 * (35.48mW/35.48mW) = 0.470 W/Kg, so the 2.4G OFDM SAR test is not required.

8.1.3 2.4G WIFI (MIMO) (Laptop Mode)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
2.4	802.11b	1	2412	14.85	15.50	No
		6	2437	15.01	15.50	No
		11	2462	15.10	15.50	No
		12	2467	14.60	15.50	No
		13	2472	13.84	14.50	No
	802.11g	1	2412	12.31	13.00	No
		2	2417	14.07	15.00	No
		6	2437	15.22	15.50	No
		10	2457	14.72	15.50	No
		11	2462	14.76	15.00	No
		12	2467	11.57	12.50	No
		13	2472	2.31	2.50	No
	VHT20	1	2412	10.22	11.00	No
		2	2417	13.35	14.00	No
		6	2437	13.83	14.00	No
		10	2457	13.80	14.00	No
		11	2462	13.36	14.00	No
		12	2467	10.62	11.50	No
		13	2472	0.88	1.50	No
	VHT40	3	2422	9.65	10.00	No
		4	2427	10.41	11.00	No
		6	2437	12.13	13.00	No
		8	2447	11.70	12.00	No
		9	2452	11.46	12.00	No
		10	2457	11.47	12.00	No
		11	2462	3.06	4.00	No
	802.11ax(HE20) (SU)	1	2412	10.81	11.00	No
		2	2417	13.28	14.00	No
		6	2437	13.47	14.00	No
		10	2457	13.56	14.00	No
		11	2462	13.52	14.00	No
		12	2467	11.18	11.50	No
		13	2472	0.59	1.50	No
	802.11ax(HE40) (SU)	3	2422	9.08	10.00	No
		4	2427	10.05	11.00	No
		6	2437	12.54	13.00	No
		8	2447	11.84	12.00	No
		9	2452	11.17	12.00	No
		10	2457	11.54	12.00	No

		11	2462	3.69	4.00	No
	802.11ax(HE20) (RU26)/0	1	2412	10.56	11.00	No
	802.11ax(HE20) (RU26)/0	2	2417	13.23	14.00	No
	802.11ax(HE20) (RU26)/4	6	2437	13.75	14.00	No
	802.11ax(HE20) (RU26)/4	10	2457	13.17	14.00	No
	802.11ax(HE20) (RU26)/8	11	2462	13.15	14.00	No
	802.11ax(HE20) (RU26)/8	12	2467	10.30	11.00	No
	802.11ax(HE20) (RU26)/8	13	2472	-11.16	-11.00	No
	802.11ax(HE20) (RU52)/37	1	2412	10.38	11.00	No
	802.11ax(HE20) (RU52)/37	2	2417	13.69	14.00	No
	802.11ax(HE20) (RU52)/39	6	2437	13.17	14.00	No
	802.11ax(HE20) (RU52)/39	10	2457	12.46	13.00	No
	802.11ax(HE20) (RU52)/40	11	2462	12.75	13.00	No
	802.11ax(HE20) (RU52)/40	12	2467	9.65	10.00	No
	802.11ax(HE20) (RU52)/40	13	2472	-10.92	-10.00	No
	802.11ax(HE20) (RU106)/53	1	2412	10.39	11.00	No
	802.11ax(HE20) (RU106)/53	2	2417	13.50	14.00	No
	802.11ax(HE20) (RU106)/53	6	2437	13.41	14.00	No
	802.11ax(HE20) (RU106)/54	10	2457	12.55	13.00	No
	802.11ax(HE20) (RU106)/54	11	2462	10.78	11.50	No
	802.11ax(HE20) (RU106)/54	12	2467	9.15	10.00	No
	802.11ax(HE20) (RU106)/54	13	2472	-8.65	-8.00	No

	802.11ax(HE20) (RU242)/61	1	2412	8.28	8.50	No
	802.11ax(HE20) (RU242)/61	2	2417	13.22	14.00	No
	802.11ax(HE20) (RU242)/61	6	2437	13.31	14.00	No
	802.11ax(HE20) (RU242)/61	10	2457	9.87	10.50	No
	802.11ax(HE20) (RU242)/61	11	2462	9.66	10.50	No
	802.11ax(HE20) (RU242)/61	12	2467	8.14	8.50	No
	802.11ax(HE20) (RU242)/61	13	2472	-6.93	-6.50	No
	802.11ax(HE40) (RU484)/65	3	2422	9.14	9.50	No
	802.11ax(HE40) (RU484)/65	4	2427	9.40	10.00	No
	802.11ax(HE40) (RU484)/65	6	2437	13.82	14.00	No
	802.11ax(HE40) (RU484)/65	8	2447	10.15	11.00	No
	802.11ax(HE40) (RU484)/65	9	2452	10.24	11.00	No
	802.11ax(HE40) (RU484)/65	10	2457	8.74	9.50	No
	802.11ax(HE40) (RU484)/65	11	2462	-5.90	-5.00	No

Note: For WiFi SAR testing was performed on single antenna RF power in SISO mode that is larger to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission used more conservative "Max. (main ant) + Max. (aux. ant) " method to determine SAR compliance. When the sum of 1-g SISO transmission SAR measurement is <1.6 W/kg, or the SPLSR value ≤0.04 the MIMO SAR test is not required.

8.1.4 5G WIFI (Aux. Antenna) (Laptop Mode)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
5.2	802.11a	36	5180	11.10	11.50	No
		40	5200	11.06	11.50	No
		48	5240	11.27	11.50	No
	802.11n(HT20)	36	5180	10.75	11.50	No
		40	5200	11.24	11.50	No
		48	5240	10.72	11.50	No
	802.11n(HT40)	38	5190	11.18	11.50	No
		46	5230	10.71	11.50	No
	802.11ac(VHT20)	36	5180	10.89	11.50	No
		40	5200	11.11	11.50	No
		48	5240	11.17	11.50	No
	802.11ac(VHT40)	38	5190	10.75	11.50	No
		46	5230	10.72	11.50	No
	802.11ac(VHT80)	42	5210	10.56	11.00	No
	802.11ac(VHT160)	50	5250	7.43	9.00	No
	802.11ax(HE20) (SU)	36	5180	10.82	11.50	No
		40	5200	10.74	11.50	No
		48	5240	11.30	11.50	No
	802.11ax(HE40) (SU)	38	5190	10.58	11.50	No
		46	5230	10.74	11.50	No
	802.11ax(HE80) (SU)	42	5210	11.03	11.50	No
	802.11ax(HE160) (SU)	50	5250	8.12	9.00	No
	802.11ax(HE20) (RU26)/0	36	5180	3.85	4.00	No
	802.11ax(HE20) (RU26)/0	40	5200	4.04	4.50	No
	802.11ax(HE20) (RU26)/8	48	5240	3.92	4.50	No
	802.11ax(HE20) (RU52)/37	36	5180	4.76	5.50	No
	802.11ax(HE20) (RU52)/37	40	5200	7.30	7.50	No
	802.11ax(HE20) (RU52)/40	48	5240	7.31	7.50	No
	802.11ax(HE20) (RU106)/53	36	5180	4.94	5.50	No
	802.11ax(HE20) (RU106)/53	40	5200	10.10	10.50	No

	802.11ax(HE20) (RU106)/54	48	5240	9.65	10.50	No
	802.11ax(HE20) (RU242)/61	36	5180	10.04	10.50	No
	802.11ax(HE20) (RU242)/61	40	5200	10.75	11.50	No
	802.11ax(HE20) (RU242)/61	48	5240	11.06	11.50	No
	802.11ax(HE40) (RU484)/65	38	5190	5.21	5.50	No
	802.11ax(HE40) (RU484)/65	46	5230	7.09	7.50	No
	802.11ax(HE80) (RU996)/67	42	5210	5.30	6.00	No
	802.11ax(HE160) (RU1992)/68	50	5250	4.72	5.50	No
5.3	802.11a	52	5260	11.21	11.50	No
		60	5300	11.16	11.50	No
		64	5320	11.32	11.50	No
	802.11n(HT20)	52	5260	10.72	11.50	No
		60	5300	11.30	11.50	No
		64	5320	11.17	11.50	No
	802.11n(HT40)	54	5270	10.59	11.50	No
		62	5310	11.11	11.50	No
	802.11ac(VHT20)	52	5260	10.71	11.50	No
		60	5300	10.75	11.50	No
		64	5320	10.90	11.50	No
	802.11ac(VHT40)	54	5270	10.64	11.50	No
		62	5310	11.02	11.50	No
	802.11ac(VHT80)	58	5290	11.43	11.50	Yes
	802.11ax(HE20) (SU)	52	5260	10.81	11.50	No
		60	5300	10.59	11.50	No
		64	5320	11.17	11.50	No
	802.11ax(HE40) (SU)	54	5270	10.88	11.50	No
		62	5310	11.14	11.50	No
	802.11ax(HE80) (SU)	58	5290	10.74	11.50	No
	802.11ax(HE20) (RU26)/0	52	5260	10.83	11.50	No
	802.11ax(HE20) (RU26)/8	60	5300	10.63	11.50	No
	802.11ax(HE20) (RU26)/8	64	5320	10.82	11.50	No

	802.11ax(HE20) (RU52)/37	52	5260	10.61	11.50	No
	802.11ax(HE20) (RU52)/40	60	5300	10.98	11.50	No
	802.11ax(HE20) (RU52)/40	64	5320	11.03	11.50	No
	802.11ax(HE20) (RU106)/53	52	5260	11.12	11.50	No
	802.11ax(HE20) (RU106)/54	60	5300	10.67	11.50	No
	802.11ax(HE20) (RU106)/54	64	5320	10.72	11.50	No
	802.11ax(HE20) (RU242)/61	52	5260	11.09	11.50	No
	802.11ax(HE20) (RU242)/61	60	5300	11.30	11.50	No
	802.11ax(HE20) (RU242)/61	64	5320	11.32	11.50	No
	802.11ax(HE40) (RU484)/65	54	5270	7.00	7.50	No
	802.11ax(HE40) (RU484)/65	62	5310	7.13	7.50	No
	802.11ax(HE80) (RU996)/67	58	5290	7.10	8.00	No
5.6	802.11a	100	5500	10.51	11.00	No
		116	5580	10.65	11.00	No
		140	5700	4.12	5.00	No
		144	5720	10.65	11.00	No
	802.11n(HT20)	100	5500	10.47	11.00	No
		116	5580	10.21	11.00	No
		140	5700	10.60	11.00	No
		144	5720	10.31	11.00	No
	802.11n(HT40)	102	5510	10.38	11.00	No
		110	5550	10.72	11.00	No
		134	5670	10.34	11.00	No
		142	5710	10.78	11.00	No
	802.11ac(VHT20)	100	5500	10.36	11.00	No
		116	5580	10.06	11.00	No
		140	5700	10.05	11.00	No
		144	5720	10.07	11.00	No
	802.11ac(VHT40)	102	5510	10.14	11.00	No
		110	5550	10.35	11.00	No
		134	5670	10.68	11.00	No

		142	5710	10.10	11.00	No
	802.11ac(VHT80)	106	5530	10.68	11.00	Yes
		122	5610	10.62	11.00	Yes
		138	5690	10.42	11.00	Yes
	802.11ac(VHT160)	114	5570	9.77	10.00	No
	802.11ax(HE20) (SU)	100	5500	10.69	11.00	No
		116	5580	10.79	11.00	No
		140	5700	10.51	11.00	No
		144	5720	10.61	11.00	No
	802.11ax(HE40) (SU)	102	5510	10.34	11.00	No
		110	5550	10.52	11.00	No
		134	5670	10.24	11.00	No
		142	5710	10.40	11.00	No
	802.11ax(HE80) (SU)	106	5530	10.73	11.00	No
		122	5610	10.67	11.00	No
		138	5690	10.18	11.00	No
	802.11ax(HE160) (SU)	114	5570	9.06	10.00	No
	802.11ax(HE20) (RU26)/0	100	5500	10.16	10.50	No
	802.11ax(HE20) (RU26)/0	116	5580	10.44	10.50	No
	802.11ax(HE20) (RU26)/8	140	5700	9.43	10.50	No
	802.11ax(HE20) (RU26)/8	144	5720	9.62	10.50	No
	802.11ax(HE20) (RU52)/37	100	5500	9.81	10.50	No
	802.11ax(HE20) (RU52)/37	116	5580	10.39	10.50	No
	802.11ax(HE20) (RU52)/40	140	5700	10.10	10.50	No
	802.11ax(HE20) (RU52)/40	144	5720	10.32	10.50	No
	802.11ax(HE20) (RU106)/53	100	5500	10.05	10.50	No
	802.11ax(HE20) (RU106)/53	116	5580	10.29	10.50	No
	802.11ax(HE20) (RU106)/54	140	5700	10.19	10.50	No
	802.11ax(HE20) (RU106)/54	144	5720	9.97	10.50	No
	802.11ax(HE20)	100	5500	7.66	8.50	No

	(RU242)/61					
	802.11ax(HE20) (RU242)/61	116	5580	9.03	9.50	No
	802.11ax(HE20) (RU242)/61	140	5700	8.99	9.50	No
	802.11ax(HE20) (RU242)/61	144	5720	8.71	9.50	No
	802.11ax(HE40) (RU484)/65	102	5510	7.13	7.50	No
	802.11ax(HE40) (RU484)/65	110	5550	10.31	10.50	No
	802.11ax(HE40) (RU484)/65	134	5670	9.61	10.50	No
	802.11ax(HE40) (RU484)/65	142	5710	10.12	10.50	No
	802.11ax(HE80) (RU996)/67	106	5530	7.61	8.00	No
	802.11ax(HE80) (RU996)/67	122	5610	10.06	10.50	No
	802.11ax(HE80) (RU996)/67	138	5690	10.17	10.50	No
	802.11ax(HE160) (RU1992)/68	114	5570	7.82	8.50	No
5.8	802.11a	149	5745	10.59	11.50	No
		157	5785	11.18	11.50	No
		165	5825	11.13	11.50	No
	802.11n(HT20)	149	5745	11.10	11.50	No
		157	5785	10.94	11.50	No
		165	5825	11.07	11.50	No
	802.11n(HT40)	151	5755	11.14	11.50	No
		159	5795	11.15	11.50	No
	802.11ac(VHT20)	149	5745	11.09	11.50	No
		157	5785	10.85	11.50	No
		165	5825	10.65	11.50	No
	802.11ac(VHT40)	151	5755	11.01	11.50	No
		159	5795	11.25	11.50	No
	802.11ac(VHT80)	155	5775	11.20	11.50	Yes
	802.11ax(HE20) (SU)	149	5745	10.78	11.50	No
		157	5785	11.03	11.50	No
		165	5825	11.34	11.50	No
	802.11ax(HE40) (SU)	151	5755	11.35	11.50	No
		159	5795	10.99	11.50	No
	802.11ax(HE80)	155	5775	11.11	11.50	No

	(SU)					
	802.11ax(HE20) (RU26)/0	149	5745	10.98	11.50	No
	802.11ax(HE20) (RU26)/8	157	5785	10.91	11.50	No
	802.11ax(HE20) (RU26)/8	165	5825	10.73	11.50	No
	802.11ax(HE20) (RU52)/37	149	5745	11.27	11.50	No
	802.11ax(HE20) (RU52)/40	157	5785	11.12	11.50	No
	802.11ax(HE20) (RU52)/40	165	5825	10.86	11.50	No
	802.11ax(HE20) (RU106)/53	149	5745	11.28	11.50	No
	802.11ax(HE20) (RU106)/54	157	5785	10.71	11.50	No
	802.11ax(HE20) (RU106)/54	165	5825	11.20	11.50	No
	802.11ax(HE20) (RU242)/61	149	5745	11.21	11.50	No
	802.11ax(HE20) (RU242)/61	157	5785	11.33	11.50	No
	802.11ax(HE20) (RU242)/61	165	5825	11.21	11.50	No
	802.11ax(HE40) (RU484)/65	151	5755	11.31	11.50	No
	802.11ax(HE40) (RU484)/65	159	5795	10.83	11.50	No
	802.11ax(HE80) (RU996)/67	155	5775	7.94	8.50	No
5.9	802.11a	169	5845	11.19	11.50	No
		173	5865	10.86	11.50	No
		177	5885	11.15	11.50	No
	802.11n(HT20)	169	5845	10.94	11.50	No
		173	5865	10.69	11.50	No
		177	5885	11.17	11.50	No
	802.11n(HT40)	167	5835	11.21	11.50	No
		175	5875	10.94	11.50	No
	802.11ac(VHT20)	169	5845	10.82	11.50	No
		173	5865	10.55	11.50	No
		177	5885	10.67	11.50	No
	802.11ac(VHT40)	167	5835	10.62	11.50	No

		175	5875	10.68	11.50	No
	802.11ac(VHT80)	171	5855	11.26	11.50	Yes
	802.11ac(VHT160)	163	5815	9.31	10.00	No
	802.11ax(HE20) (SU)	169	5845	11.33	11.50	No
		173	5865	10.81	11.50	No
		177	5885	11.23	11.50	No
	802.11ax(HE40) (SU)	167	5835	10.87	11.50	No
		175	5875	10.57	11.50	No
	802.11ax(HE80) (SU)	171	5855	10.61	11.50	No
	802.11ax(HE160) (SU)	163	5815	9.73	10.00	No
	802.11ax(HE20) (RU26)/0	169	5845	5.33	6.00	No
	802.11ax(HE20) (RU26)/4	173	5865	5.09	6.00	No
	802.11ax(HE20) (RU26)/8	177	5885	5.10	6.00	No
	802.11ax(HE20) (RU52)/37	169	5845	8.29	9.00	No
	802.11ax(HE20) (RU52)/38	173	5865	8.07	9.00	No
	802.11ax(HE20) (RU52)/40	177	5885	8.72	9.00	No
	802.11ax(HE20) (RU106)/53	169	5845	10.69	11.50	No
	802.11ax(HE20) (RU106)/53	173	5865	11.09	11.50	No
	802.11ax(HE20) (RU106)/54	177	5885	10.97	11.50	No
	802.11ax(HE20) (RU242)/61	169	5845	11.04	11.50	No
	802.11ax(HE20) (RU242)/61	173	5865	10.79	11.50	No
	802.11ax(HE20) (RU242)/61	177	5885	10.56	11.50	No
	802.11ax(HE40) (RU484)/65	167	5835	10.82	11.50	No
	802.11ax(HE40) (RU484)/65	175	5875	10.87	11.50	No
	802.11ax(HE80) (RU996)/67	171	5855	9.60	10.50	No
	802.11ax(HE160)	163	5815	7.57	8.50	No

	(RU1992)/68					
Note: When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.						

8.1.5 5G WIFI (Main Antenna) (Laptop Mode)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
5.2	802.11a	36	5180	11.05	11.50	No
		40	5200	10.93	11.50	No
		48	5240	11.14	11.50	No
	802.11n(HT20)	36	5180	10.73	11.50	No
		40	5200	10.58	11.50	No
		48	5240	10.69	11.50	No
	802.11n(HT40)	38	5190	10.83	11.50	No
		46	5230	11.09	11.50	No
	802.11ac(VHT20)	36	5180	10.58	11.50	No
		40	5200	11.34	11.50	No
		48	5240	10.66	11.50	No
	802.11ac(VHT40)	38	5190	11.22	11.50	No
		46	5230	10.61	11.50	No
	802.11ac(VHT80)	42	5210	10.86	11.00	No
	802.11ac(VHT160)	50	5250	7.27	9.00	No
	802.11ax(HE20) (SU)	36	5180	11.22	11.50	No
		40	5200	11.02	11.50	No
		48	5240	10.86	11.50	No
	802.11ax(HE40) (SU)	38	5190	11.14	11.50	No
		46	5230	10.80	11.50	No
	802.11ax(HE80) (SU)	42	5210	10.92	11.50	No
	802.11ax(HE160) (SU)	50	5250	7.82	9.00	No
	802.11ax(HE20) (RU26)/0	36	5180	3.47	4.00	No
	802.11ax(HE20) (RU26)/0	40	5200	3.99	4.50	No
	802.11ax(HE20) (RU26)/8	48	5240	4.35	4.50	No
	802.11ax(HE20) (RU52)/37	36	5180	4.99	5.50	No
	802.11ax(HE20) (RU52)/37	40	5200	7.25	7.50	No
	802.11ax(HE20) (RU52)/40	48	5240	6.88	7.50	No
	802.11ax(HE20) (RU106)/53	36	5180	4.91	5.50	No
	802.11ax(HE20) (RU106)/53	40	5200	9.56	10.50	No

	802.11ax(HE20) (RU106)/54	48	5240	9.89	10.50	No
	802.11ax(HE20) (RU242)/61	36	5180	10.04	10.50	No
	802.11ax(HE20) (RU242)/61	40	5200	11.01	11.50	No
	802.11ax(HE20) (RU242)/61	48	5240	10.74	11.50	No
	802.11ax(HE40) (RU484)/65	38	5190	4.59	5.50	No
	802.11ax(HE40) (RU484)/65	46	5230	7.33	7.50	No
	802.11ax(HE80) (RU996)/67	42	5210	5.31	6.00	No
	802.11ax(HE160) (RU1992)/68	50	5250	4.89	5.50	No
5.3	802.11a	52	5260	11.08	11.50	No
		60	5300	10.77	11.50	No
		64	5320	11.25	11.50	No
	802.11n(HT20)	52	5260	10.82	11.50	No
		60	5300	10.69	11.50	No
		64	5320	11.03	11.50	No
	802.11n(HT40)	54	5270	11.11	11.50	No
		62	5310	10.95	11.50	No
	802.11ac(VHT20)	52	5260	11.32	11.50	No
		60	5300	10.58	11.50	No
		64	5320	10.97	11.50	No
	802.11ac(VHT40)	54	5270	10.96	11.50	No
		62	5310	10.82	11.50	No
	802.11ac(VHT80)	58	5290	11.21	11.50	Yes
	802.11ax(HE20) (SU)	52	5260	11.35	11.50	No
		60	5300	10.69	11.50	No
		64	5320	11.01	11.50	No
	802.11ax(HE40) (SU)	54	5270	11.14	11.50	No
		62	5310	10.62	11.50	No
	802.11ax(HE80) (SU)	58	5290	11.31	11.50	No
	802.11ax(HE20) (RU26)/0	52	5260	11.29	11.50	No
	802.11ax(HE20) (RU26)/8	60	5300	11.14	11.50	No
	802.11ax(HE20) (RU26)/8	64	5320	11.12	11.50	No

	802.11ax(HE20) (RU52)/37	52	5260	11.20	11.50	No
	802.11ax(HE20) (RU52)/40	60	5300	11.10	11.50	No
	802.11ax(HE20) (RU52)/40	64	5320	10.90	11.50	No
	802.11ax(HE20) (RU106)/53	52	5260	11.15	11.50	No
	802.11ax(HE20) (RU106)/54	60	5300	10.92	11.50	No
	802.11ax(HE20) (RU106)/54	64	5320	11.04	11.50	No
	802.11ax(HE20) (RU242)/61	52	5260	10.94	11.50	No
	802.11ax(HE20) (RU242)/61	60	5300	10.68	11.50	No
	802.11ax(HE20) (RU242)/61	64	5320	10.74	11.50	No
	802.11ax(HE40) (RU484)/65	54	5270	7.00	7.50	No
	802.11ax(HE40) (RU484)/65	62	5310	7.14	7.50	No
	802.11ax(HE80) (RU996)/67	58	5290	7.36	8.00	No
5.6	802.11a	100	5500	10.65	11.00	No
		116	5580	10.49	11.00	No
		140	5700	10.79	11.00	No
		144	5720	10.15	11.00	No
	802.11n(HT20)	100	5500	10.60	11.00	No
		116	5580	10.85	11.00	No
		140	5700	10.44	11.00	No
		144	5720	10.40	11.00	No
	802.11n(HT40)	102	5510	10.51	11.00	No
		110	5550	10.71	11.00	No
		134	5670	10.78	11.00	No
		142	5710	10.84	11.00	No
	802.11ac(VHT20)	100	5500	10.50	11.00	No
		116	5580	10.28	11.00	No
		140	5700	10.70	11.00	No
		144	5720	10.50	11.00	No
	802.11ac(VHT40)	102	5510	10.33	11.00	No
		110	5550	10.38	11.00	No
		134	5670	10.81	11.00	No

		142	5710	10.37	11.00	No
	802.11ac(VHT80)	106	5530	10.89	11.00	Yes
		122	5610	10.63	11.00	Yes
		138	5690	10.65	11.00	Yes
	802.11ac(VHT160)	114	5570	9.34	10.00	No
	802.11ax(HE20) (SU)	100	5500	10.65	11.00	No
		116	5580	10.14	11.00	No
		140	5700	10.84	11.00	No
		144	5720	10.28	11.00	No
	802.11ax(HE40) (SU)	102	5510	10.66	11.00	No
		110	5550	10.75	11.00	No
		134	5670	10.64	11.00	No
		142	5710	10.81	11.00	No
	802.11ax(HE80) (SU)	106	5530	10.35	11.00	No
		122	5610	10.23	11.00	No
		138	5690	10.68	11.00	No
	802.11ax(HE160) (SU)	114	5570	9.40	10.00	No
	802.11ax(HE20) (RU26)/0	100	5500	10.29	10.50	No
	802.11ax(HE20) (RU26)/0	116	5580	10.11	10.50	No
	802.11ax(HE20) (RU26)/8	140	5700	9.71	10.50	No
	802.11ax(HE20) (RU26)/8	144	5720	9.56	10.50	No
	802.11ax(HE20) (RU52)/37	100	5500	10.45	10.50	No
	802.11ax(HE20) (RU52)/37	116	5580	10.08	10.50	No
	802.11ax(HE20) (RU52)/40	140	5700	10.25	10.50	No
	802.11ax(HE20) (RU52)/40	144	5720	10.09	10.50	No
	802.11ax(HE20) (RU106)/53	100	5500	10.12	10.50	No
	802.11ax(HE20) (RU106)/53	116	5580	9.65	10.50	No
	802.11ax(HE20) (RU106)/54	140	5700	10.08	10.50	No
	802.11ax(HE20) (RU106)/54	144	5720	9.82	10.50	No
	802.11ax(HE20)	100	5500	7.74	8.50	No

	(RU242)/61					
	802.11ax(HE20) (RU242)/61	116	5580	8.64	9.50	No
	802.11ax(HE20) (RU242)/61	140	5700	9.07	9.50	No
	802.11ax(HE20) (RU242)/61	144	5720	7.74	9.50	No
	802.11ax(HE40) (RU484)/65	102	5510	6.64	7.50	No
	802.11ax(HE40) (RU484)/65	110	5550	10.21	10.50	No
	802.11ax(HE40) (RU484)/65	134	5670	10.33	10.50	No
	802.11ax(HE40) (RU484)/65	142	5710	10.05	10.50	No
	802.11ax(HE80) (RU996)/67	106	5530	7.67	8.00	No
	802.11ax(HE80) (RU996)/67	122	5610	9.55	10.50	No
	802.11ax(HE80) (RU996)/67	138	5690	9.71	10.50	No
	802.11ax(HE160) (RU1992)/68	114	5570	8.30	8.50	No
5.8	802.11a	149	5745	10.96	11.50	No
		157	5785	10.88	11.50	No
		165	5825	10.78	11.50	No
	802.11n(HT20)	149	5745	10.76	11.50	No
		157	5785	11.27	11.50	No
		165	5825	10.85	11.50	No
	802.11n(HT40)	151	5755	10.80	11.50	No
		159	5795	10.70	11.50	No
	802.11ac(VHT20)	149	5745	10.63	11.50	No
		157	5785	11.28	11.50	No
		165	5825	11.31	11.50	No
	802.11ac(VHT40)	151	5755	11.14	11.50	No
		159	5795	11.34	11.50	No
	802.11ac(VHT80)	155	5775	11.23	11.50	Yes
	802.11ax(HE20) (SU)	149	5745	11.08	11.50	No
		157	5785	10.57	11.50	No
		165	5825	10.89	11.50	No
	802.11ax(HE40) (SU)	151	5755	10.72	11.50	No
		159	5795	10.98	11.50	No
	802.11ax(HE80)	155	5775	10.80	11.50	No

	(SU)					
	802.11ax(HE20) (RU26)/0	149	5745	11.10	11.50	No
	802.11ax(HE20) (RU26)/8	157	5785	11.35	11.50	No
	802.11ax(HE20) (RU26)/8	165	5825	10.83	11.50	No
	802.11ax(HE20) (RU52)/37	149	5745	11.07	11.50	No
	802.11ax(HE20) (RU52)/40	157	5785	10.93	11.50	No
	802.11ax(HE20) (RU52)/40	165	5825	11.02	11.50	No
	802.11ax(HE20) (RU106)/53	149	5745	10.73	11.50	No
	802.11ax(HE20) (RU106)/54	157	5785	10.85	11.50	No
	802.11ax(HE20) (RU106)/54	165	5825	10.78	11.50	No
	802.11ax(HE20) (RU242)/61	149	5745	11.34	11.50	No
	802.11ax(HE20) (RU242)/61	157	5785	10.71	11.50	No
	802.11ax(HE20) (RU242)/61	165	5825	10.61	11.50	No
	802.11ax(HE40) (RU484)/65	151	5755	11.04	11.50	No
	802.11ax(HE40) (RU484)/65	159	5795	10.97	11.50	No
	802.11ax(HE80) (RU996)/67	155	5775	7.61	8.50	No
5.9	802.11a	169	5845	10.86	11.50	No
		173	5865	11.09	11.50	No
		177	5885	10.66	11.50	No
	802.11n(HT20)	169	5845	10.81	11.50	No
		173	5865	11.28	11.50	No
		177	5885	11.21	11.50	No
	802.11n(HT40)	167	5835	11.32	11.50	No
		175	5875	11.02	11.50	No
	802.11ac(VHT20)	169	5845	11.06	11.50	No
		173	5865	10.81	11.50	No
		177	5885	10.87	11.50	No
	802.11ac(VHT40)	167	5835	10.65	11.50	No

		175	5875	10.55	11.50	No
	802.11ac(VHT80)	171	5855	11.25	11.50	Yes
	802.11ac(VHT160)	163	5815	9.68	10.00	No
	802.11ax(HE20) (SU)	169	5845	10.81	11.50	No
		173	5865	10.93	11.50	No
		177	5885	11.28	11.50	No
	802.11ax(HE40) (SU)	167	5835	11.04	11.50	No
		175	5875	11.27	11.50	No
	802.11ax(HE80) (SU)	171	5855	11.09	11.50	No
	802.11ax(HE160) (SU)	163	5815	9.05	10.00	No
	802.11ax(HE20) (RU26)/0	169	5845	5.43	6.00	No
	802.11ax(HE20) (RU26)/4	173	5865	5.79	6.00	No
	802.11ax(HE20) (RU26)/8	177	5885	5.65	6.00	No
	802.11ax(HE20) (RU52)/37	169	5845	8.43	9.00	No
	802.11ax(HE20) (RU52)/38	173	5865	8.01	9.00	No
	802.11ax(HE20) (RU52)/40	177	5885	8.05	9.00	No
	802.11ax(HE20) (RU106)/53	169	5845	10.96	11.50	No
	802.11ax(HE20) (RU106)/53	173	5865	10.70	11.50	No
	802.11ax(HE20) (RU106)/54	177	5885	10.95	11.50	No
	802.11ax(HE20) (RU242)/61	169	5845	11.25	11.50	No
	802.11ax(HE20) (RU242)/61	173	5865	11.29	11.50	No
	802.11ax(HE20) (RU242)/61	177	5885	11.04	11.50	No
	802.11ax(HE40) (RU484)/65	167	5835	11.19	11.50	No
	802.11ax(HE40) (RU484)/65	175	5875	10.57	11.50	No
	802.11ax(HE80) (RU996)/67	171	5855	9.63	10.50	No
	802.11ax(HE160)	163	5815	7.69	8.50	No

	(RU1992)/68					
Note: When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.						

8.1.6 5G WIFI (MIMO) (Laptop Mode)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
5.2	802.11a	36	5180	10.81	11.50	No
		40	5200	11.05	11.50	No
		48	5240	11.02	11.50	No
	802.11n(HT20)	36	5180	10.87	11.50	No
		40	5200	11.20	11.50	No
		48	5240	10.77	11.50	No
	802.11n(HT40)	38	5190	10.83	11.50	No
		46	5230	11.31	11.50	No
	802.11ac(VHT20)	36	5180	11.17	11.50	No
		40	5200	10.88	11.50	No
		48	5240	10.92	11.50	No
	802.11ac(VHT40)	38	5190	10.99	11.50	No
		46	5230	10.74	11.50	No
	802.11ac(VHT80)	42	5210	10.51	11.00	No
	802.11ac(VHT160)	50	5250	8.28	9.00	No
	802.11ax(HE20) (SU)	36	5180	11.02	11.50	No
		40	5200	10.64	11.50	No
		48	5240	10.81	11.50	No
	802.11ax(HE40) (SU)	38	5190	11.33	11.50	No
		46	5230	11.22	11.50	No
	802.11ax(HE80) (SU)	42	5210	11.28	11.50	No
	802.11ax(HE160) (SU)	50	5250	8.43	9.00	No
	802.11ax(HE20) (RU26)/0	36	5180	3.62	4.00	No
	802.11ax(HE20) (RU26)/0	40	5200	3.58	4.50	No
	802.11ax(HE20) (RU26)/8	48	5240	3.65	4.50	No
	802.11ax(HE20) (RU52)/37	36	5180	4.57	5.50	No
	802.11ax(HE20) (RU52)/37	40	5200	6.98	7.50	No
	802.11ax(HE20) (RU52)/40	48	5240	6.55	7.50	No
	802.11ax(HE20) (RU106)/53	36	5180	4.57	5.50	No
	802.11ax(HE20) (RU106)/53	40	5200	9.89	10.50	No

	802.11ax(HE20) (RU106)/54	48	5240	9.94	10.50	No
	802.11ax(HE20) (RU242)/61	36	5180	10.26	10.50	No
	802.11ax(HE20) (RU242)/61	40	5200	11.08	11.50	No
	802.11ax(HE20) (RU242)/61	48	5240	11.21	11.50	No
	802.11ax(HE40) (RU484)/65	38	5190	5.14	5.50	No
	802.11ax(HE40) (RU484)/65	46	5230	7.06	7.50	No
	802.11ax(HE80) (RU996)/67	42	5210	5.49	6.00	No
	802.11ax(HE160) (RU1992)/68	50	5250	4.82	5.50	No
5.3	802.11a	52	5260	11.05	11.50	No
		60	5300	10.74	11.50	No
		64	5320	10.80	11.50	No
	802.11n(HT20)	52	5260	11.00	11.50	No
		60	5300	11.31	11.50	No
		64	5320	10.71	11.50	No
	802.11n(HT40)	54	5270	10.70	11.50	No
		62	5310	11.18	11.50	No
	802.11ac(VHT20)	52	5260	10.94	11.50	No
		60	5300	10.59	11.50	No
		64	5320	10.76	11.50	No
	802.11ac(VHT40)	54	5270	11.27	11.50	No
		62	5310	10.60	11.50	No
	802.11ac(VHT80)	58	5290	11.29	11.50	No
	802.11ax(HE20) (SU)	52	5260	10.59	11.50	No
		60	5300	10.84	11.50	No
		64	5320	11.25	11.50	No
	802.11ax(HE40) (SU)	54	5270	10.92	11.50	No
		62	5310	11.33	11.50	No
	802.11ax(HE80) (SU)	58	5290	10.95	11.50	No
	802.11ax(HE20) (RU26)/0	52	5260	11.05	11.50	No
	802.11ax(HE20) (RU26)/8	60	5300	10.90	11.50	No
	802.11ax(HE20) (RU26)/8	64	5320	11.05	11.50	No

	802.11ax(HE20) (RU52)/37	52	5260	11.02	11.50	No
	802.11ax(HE20) (RU52)/40	60	5300	10.89	11.50	No
	802.11ax(HE20) (RU52)/40	64	5320	11.29	11.50	No
	802.11ax(HE20) (RU106)/53	52	5260	10.64	11.50	No
	802.11ax(HE20) (RU106)/54	60	5300	10.93	11.50	No
	802.11ax(HE20) (RU106)/54	64	5320	11.19	11.50	No
	802.11ax(HE20) (RU242)/61	52	5260	11.08	11.50	No
	802.11ax(HE20) (RU242)/61	60	5300	11.26	11.50	No
	802.11ax(HE20) (RU242)/61	64	5320	10.63	11.50	No
	802.11ax(HE40) (RU484)/65	54	5270	7.05	7.50	No
	802.11ax(HE40) (RU484)/65	62	5310	7.33	7.50	No
	802.11ax(HE80) (RU996)/67	58	5290	7.77	8.00	No
5.6	802.11a	100	5500	10.50	11.00	No
		116	5580	10.28	11.00	No
		140	5700	4.72	5.00	No
		144	5720	10.39	11.00	No
	802.11n(HT20)	100	5500	10.12	11.00	No
		116	5580	10.10	11.00	No
		140	5700	10.23	11.00	No
		144	5720	10.30	11.00	No
	802.11n(HT40)	102	5510	10.21	11.00	No
		110	5550	10.58	11.00	No
		134	5670	10.71	11.00	No
		142	5710	10.70	11.00	No
	802.11ac(VHT20)	100	5500	10.38	11.00	No
		116	5580	10.11	11.00	No
		140	5700	10.34	11.00	No
		144	5720	10.19	11.00	No
	802.11ac(VHT40)	102	5510	10.23	11.00	No
		110	5550	10.61	11.00	No
		134	5670	10.05	11.00	No

		142	5710	10.80	11.00	No
	802.11ac(VHT80)	106	5530	10.33	11.00	No
		122	5610	10.57	11.00	No
		138	5690	10.81	11.00	No
		114	5570	9.51	10.00	No
	802.11ax(HE20) (SU)	100	5500	10.32	11.00	No
		116	5580	10.76	11.00	No
		140	5700	10.13	11.00	No
		144	5720	10.38	11.00	No
	802.11ax(HE40) (SU)	102	5510	10.40	11.00	No
		110	5550	10.38	11.00	No
		134	5670	10.32	11.00	No
		142	5710	10.78	11.00	No
	802.11ax(HE80) (SU)	106	5530	10.56	11.00	No
		122	5610	10.17	11.00	No
		138	5690	10.30	11.00	No
	802.11ax(HE160) (SU)	114	5570	9.38	10.00	No
	802.11ax(HE20) (RU26)/0	100	5500	10.06	10.50	No
	802.11ax(HE20) (RU26)/0	116	5580	9.92	10.50	No
	802.11ax(HE20) (RU26)/8	140	5700	9.85	10.50	No
	802.11ax(HE20) (RU26)/8	144	5720	10.24	10.50	No
	802.11ax(HE20) (RU52)/37	100	5500	10.09	10.50	No
	802.11ax(HE20) (RU52)/37	116	5580	9.97	10.50	No
	802.11ax(HE20) (RU52)/40	140	5700	10.19	10.50	No
	802.11ax(HE20) (RU52)/40	144	5720	9.86	10.50	No
	802.11ax(HE20) (RU106)/53	100	5500	9.67	10.50	No
	802.11ax(HE20) (RU106)/53	116	5580	9.62	10.50	No
	802.11ax(HE20) (RU106)/54	140	5700	10.22	10.50	No
	802.11ax(HE20) (RU106)/54	144	5720	10.17	10.50	No
	802.11ax(HE20)	100	5500	7.65	8.50	No

	(RU242)/61					
	802.11ax(HE20) (RU242)/61	116	5580	8.67	9.50	No
	802.11ax(HE20) (RU242)/61	140	5700	8.65	9.50	No
	802.11ax(HE20) (RU242)/61	144	5720	8.93	9.50	No
	802.11ax(HE40) (RU484)/65	102	5510	6.58	7.50	No
	802.11ax(HE40) (RU484)/65	110	5550	9.91	10.50	No
	802.11ax(HE40) (RU484)/65	134	5670	9.76	10.50	No
	802.11ax(HE40) (RU484)/65	142	5710	9.55	10.50	No
	802.11ax(HE80) (RU996)/67	106	5530	7.41	8.00	No
	802.11ax(HE80) (RU996)/67	122	5610	10.20	10.50	No
	802.11ax(HE80) (RU996)/67	138	5690	10.05	10.50	No
	802.11ax(HE160) (RU1992)/68	114	5570	8.13	8.50	No
5.8	802.11a	149	5745	11.32	11.50	No
		157	5785	11.08	11.50	No
		165	5825	10.79	11.50	No
	802.11n(HT20)	149	5745	11.08	11.50	No
		157	5785	10.90	11.50	No
		165	5825	11.02	11.50	No
	802.11n(HT40)	151	5755	10.95	11.50	No
		159	5795	11.28	11.50	No
	802.11ac(VHT20)	149	5745	10.81	11.50	No
		157	5785	10.72	11.50	No
		165	5825	11.26	11.50	No
	802.11ac(VHT40)	151	5755	10.77	11.50	No
		159	5795	11.17	11.50	No
	802.11ac(VHT80)	155	5775	11.16	11.50	No
	802.11ax(HE20) (SU)	149	5745	11.04	11.50	No
		157	5785	10.92	11.50	No
		165	5825	11.04	11.50	No
	802.11ax(HE40) (SU)	151	5755	10.73	11.50	No
		159	5795	11.09	11.50	No
	802.11ax(HE80)	155	5775	10.59	11.50	No

	(SU)					
	802.11ax(HE20) (RU26)/0	149	5745	11.09	11.50	No
	802.11ax(HE20) (RU26)/8	157	5785	10.98	11.50	No
	802.11ax(HE20) (RU26)/8	165	5825	11.30	11.50	No
	802.11ax(HE20) (RU52)/37	149	5745	11.18	11.50	No
	802.11ax(HE20) (RU52)/40	157	5785	10.89	11.50	No
	802.11ax(HE20) (RU52)/40	165	5825	10.96	11.50	No
	802.11ax(HE20) (RU106)/53	149	5745	10.67	11.50	No
	802.11ax(HE20) (RU106)/54	157	5785	10.74	11.50	No
	802.11ax(HE20) (RU106)/54	165	5825	10.97	11.50	No
	802.11ax(HE20) (RU242)/61	149	5745	10.73	11.50	No
	802.11ax(HE20) (RU242)/61	157	5785	11.07	11.50	No
	802.11ax(HE20) (RU242)/61	165	5825	11.09	11.50	No
	802.11ax(HE40) (RU484)/65	151	5755	10.71	11.50	No
	802.11ax(HE40) (RU484)/65	159	5795	11.14	11.50	No
	802.11ax(HE80) (RU996)/67	155	5775	8.02	8.50	No
5.9	802.11a	169	5845	10.87	11.50	No
		173	5865	11.29	11.50	No
		177	5885	10.81	11.50	No
	802.11n(HT20)	169	5845	10.58	11.50	No
		173	5865	11.27	11.50	No
		177	5885	11.25	11.50	No
	802.11n(HT40)	167	5835	10.87	11.50	No
		175	5875	10.58	11.50	No
	802.11ac(VHT20)	169	5845	10.67	11.50	No
		173	5865	10.83	11.50	No
		177	5885	10.94	11.50	No
	802.11ac(VHT40)	167	5835	10.92	11.50	No

		175	5875	11.34	11.50	No
	802.11ac(VHT80)	171	5855	11.09	11.50	No
	802.11ac(VHT160)	163	5815	9.40	10.00	No
	802.11ax(HE20) (SU)	169	5845	11.02	11.50	No
		173	5865	11.31	11.50	No
		177	5885	11.24	11.50	No
	802.11ax(HE40) (SU)	167	5835	10.84	11.50	No
		175	5875	11.24	11.50	No
	802.11ax(HE80) (SU)	171	5855	11.04	11.50	No
	802.11ax(HE160) (SU)	163	5815	9.79	10.00	No
	802.11ax(HE20) (RU26)/0	169	5845	5.21	6.00	No
	802.11ax(HE20) (RU26)/4	173	5865	5.41	6.00	No
	802.11ax(HE20) (RU26)/8	177	5885	5.58	6.00	No
	802.11ax(HE20) (RU52)/37	169	5845	8.69	9.00	No
	802.11ax(HE20) (RU52)/38	173	5865	8.20	9.00	No
	802.11ax(HE20) (RU52)/40	177	5885	8.39	9.00	No
	802.11ax(HE20) (RU106)/53	169	5845	11.24	11.50	No
	802.11ax(HE20) (RU106)/53	173	5865	10.78	11.50	No
	802.11ax(HE20) (RU106)/54	177	5885	10.70	11.50	No
	802.11ax(HE20) (RU242)/61	169	5845	10.64	11.50	No
	802.11ax(HE20) (RU242)/61	173	5865	10.65	11.50	No
	802.11ax(HE20) (RU242)/61	177	5885	11.09	11.50	No
	802.11ax(HE40) (RU484)/65	167	5835	11.03	11.50	No
	802.11ax(HE40) (RU484)/65	175	5875	11.08	11.50	No
	802.11ax(HE80) (RU996)/67	171	5855	9.81	10.50	No
	802.11ax(HE160)	163	5815	7.93	8.50	No

	(RU1992)/68					
Note: For WiFi SAR testing was performed on single antenna RF power in SISO mode that is larger to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission used more conservative "Max. (main ant) + Max. (aux. ant) " method to determine SAR compliance. When the sum of 1-g SISO transmission SAR measurement is <1.6 W/kg, or the SPLSR value ≤ 0.04 the MIMO SAR test is not required.						

8.1.7 6G WIFI (Aux. Antenna) (Laptop Mode)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
6	802.11a	2	5935	8.28	9.00	No
		1	5955	10.33	10.50	No
		45	6175	9.59	10.50	No
		93	6415	10.17	10.50	No
		97	6435	9.76	10.50	No
		105	6475	10.23	10.50	No
		113	6515	10.29	10.50	No
		117	6535	9.58	10.50	No
		149	6695	9.85	10.50	No
		181	6855	9.92	10.50	No
		185	6875	9.96	10.50	No
		209	6995	9.79	10.50	No
		233	7115	10.15	10.50	No
	802.11ax(HE20) (SU)	2	5935	-6.65	-6.00	No
		1	5955	9.96	10.50	No
		45	6175	9.88	10.50	No
		93	6415	9.97	10.50	No
		97	6435	9.56	10.50	No
		105	6475	10.33	10.50	No
		113	6515	10.30	10.50	No
		117	6535	10.07	10.50	No
		149	6695	10.18	10.50	No
		181	6855	9.97	10.50	No
		185	6875	9.60	10.50	No
		209	6995	10.30	10.50	No
		233	7115	9.83	10.50	No
	802.11ax(HE40) (SU)	3	5965	9.67	10.50	No
		43	6165	10.07	10.50	No
		91	6405	10.17	10.50	No
		99	6445	10.16	10.50	No
		107	6485	9.78	10.50	No
		115	6525	10.18	10.50	No
		123	6565	9.55	10.50	No
		155	6725	9.73	10.50	No
		179	6845	9.92	10.50	No
		187	6885	10.10	10.50	No
		211	7005	9.56	10.50	No
		227	7085	9.65	10.50	No
	802.11ax(HE80)	7	5985	10.08	10.50	No

	(SU)	39	6145	10.18	10.50	No
		87	6385	10.22	10.50	No
		103	6465	10.10	10.50	No
		119	6545	10.16	10.50	No
		151	6705	9.84	10.50	No
		183	6865	9.71	10.50	No
		199	6945	9.99	10.50	No
		215	7025	9.68	10.50	No
	802.11ax(HE160) (SU)	15	6025	10.32	10.50	Yes
		47	6185	10.49	10.50	Yes
		79	6345	10.19	10.50	Yes
		111	6505	10.31	10.50	Yes
		143	6665	10.14	10.50	Yes
		175	6825	10.15	10.50	Yes
		207	6985	10.17	10.50	Yes
	802.11ax(HE20) (RU26)	2	5935	-17.45	-17.00	No
		1	5955	8.58	9.50	No
		45	6175	8.89	9.50	No
		93	6415	8.84	9.50	No
		97	6435	8.71	9.50	No
		105	6475	8.89	9.50	No
		113	6515	8.88	9.50	No
		117	6535	8.96	9.50	No
		149	6695	8.63	9.50	No
		181	6855	8.87	9.50	No
		185	6875	9.03	9.50	No
		209	6995	8.69	9.50	No
		233	7115	9.03	9.50	No
	802.11ax(HE20) (RU52)	2	5935	-15.28	-15.00	No
		1	5955	10.12	10.50	No
		45	6175	9.94	10.50	No
		93	6415	10.19	10.50	No
		97	6435	9.21	9.50	No
		105	6475	8.94	9.50	No
		113	6515	9.26	9.50	No
		117	6535	8.75	9.50	No
		149	6695	8.80	9.50	No
		181	6855	8.90	9.50	No
		185	6875	9.30	9.50	No
		209	6995	8.63	9.50	No
		233	7115	8.99	9.50	No
	802.11ax(HE20) (RU106)	2	5935	-13.15	-13.00	No
		1	5955	10.22	10.50	No

		45	6175	10.32	10.50	No
		93	6415	10.06	10.50	No
		97	6435	9.17	9.50	No
		105	6475	9.30	9.50	No
		113	6515	8.85	9.50	No
		117	6535	9.32	9.50	No
		149	6695	9.29	9.50	No
		181	6855	9.30	9.50	No
		185	6875	9.23	9.50	No
		209	6995	9.30	9.50	No
		233	7115	9.10	9.50	No
	802.11ax(HE20) (RU242)	2	5935	-10.38	-10.00	No
		1	5955	9.99	10.50	No
		45	6175	9.75	10.50	No
		93	6415	9.76	10.50	No
		97	6435	8.92	9.50	No
		105	6475	9.04	9.50	No
		113	6515	8.89	9.50	No
		117	6535	9.30	9.50	No
		149	6695	9.31	9.50	No
		181	6855	9.01	9.50	No
		185	6875	9.02	9.50	No
		209	6995	9.14	9.50	No
		233	7115	8.87	9.50	No
	802.11ax(HE40) (RU484)	3	5965	9.94	10.50	No
		43	6165	10.23	10.50	No
		91	6405	10.35	10.50	No
		99	6445	9.84	10.50	No
		107	6485	9.84	10.50	No
		115	6525	9.64	10.50	No
		123	6565	10.22	10.50	No
		155	6725	10.16	10.50	No
		179	6845	10.23	10.50	No
		187	6885	10.33	10.50	No
		211	7005	9.56	10.50	No
		227	7085	10.12	10.50	No
	802.11ax(HE80) (RU996)	7	5985	9.64	10.50	No
		39	6145	10.15	10.50	No
		87	6385	10.31	10.50	No
		103	6465	9.89	10.50	No
		119	6545	10.34	10.50	No
		151	6705	9.65	10.50	No
		183	6865	10.24	10.50	No

		199	6945	9.65	10.50	No
		215	7025	9.76	10.50	No
	802.11ax(HE160) (RU2*996)	15	6025	9.84	10.50	No
		47	6185	9.93	10.50	No
		79	6345	10.34	10.50	No
		111	6505	10.24	10.50	No
		143	6665	9.85	10.50	No
		175	6825	10.05	10.50	No
		207	6985	9.89	10.50	No

Note: When multiple channel bandwidth configurations in a frequency band have the same maximum tune-up output power, the test configuration is determined by applying the following steps sequentially.

1) The largest channel bandwidth configuration is selected between the multiple configurations in a frequency band with the same maximum tune-up output power.

8.1.8 6G WIFI (Main Antenna) (Laptop Mode)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
6	802.11a	2	5935	8.31	9.00	No
		1	5955	9.85	10.50	No
		45	6175	10.05	10.50	No
		93	6415	9.59	10.50	No
		97	6435	10.08	10.50	No
		105	6475	9.60	10.50	No
		113	6515	9.87	10.50	No
		117	6535	9.63	10.50	No
		149	6695	9.66	10.50	No
		181	6855	9.62	10.50	No
		185	6875	9.96	10.50	No
		209	6995	10.30	10.50	No
		233	7115	9.76	10.50	No
	802.11ax(HE20) (SU)	2	5935	-6.43	-6.00	No
		1	5955	9.67	10.50	No
		45	6175	10.14	10.50	No
		93	6415	9.74	10.50	No
		97	6435	10.25	10.50	No
		105	6475	10.02	10.50	No
		113	6515	9.76	10.50	No
		117	6535	10.16	10.50	No
		149	6695	10.17	10.50	No
		181	6855	10.19	10.50	No
		185	6875	10.10	10.50	No
		209	6995	9.73	10.50	No
		233	7115	9.71	10.50	No
	802.11ax(HE40) (SU)	3	5965	9.61	10.50	No
		43	6165	10.18	10.50	No
		91	6405	9.93	10.50	No
		99	6445	10.03	10.50	No
		107	6485	9.88	10.50	No
		115	6525	10.27	10.50	No
		123	6565	10.17	10.50	No
		155	6725	9.68	10.50	No
		179	6845	9.62	10.50	No
		187	6885	9.93	10.50	No
		211	7005	10.18	10.50	No
		227	7085	10.00	10.50	No
	802.11ax(HE80)	7	5985	10.07	10.50	No

	(SU)	39	6145	9.86	10.50	No
		87	6385	9.61	10.50	No
		103	6465	10.12	10.50	No
		119	6545	10.08	10.50	No
		151	6705	9.84	10.50	No
		183	6865	9.96	10.50	No
		199	6945	9.73	10.50	No
		215	7025	9.60	10.50	No
	802.11ax(HE160) (SU)	15	6025	10.19	10.50	Yes
		47	6185	10.38	10.50	Yes
		79	6345	10.15	10.50	Yes
		111	6505	10.48	10.50	Yes
		143	6665	10.47	10.50	Yes
		175	6825	10.48	10.50	Yes
		207	6985	9.93	10.50	Yes
	802.11ax(HE20) (RU26)	2	5935	-17.25	-17.00	No
		1	5955	9.29	9.50	No
		45	6175	9.12	9.50	No
		93	6415	8.86	9.50	No
		97	6435	9.27	9.50	No
		105	6475	8.73	9.50	No
		113	6515	8.62	9.50	No
		117	6535	8.72	9.50	No
		149	6695	8.60	9.50	No
		181	6855	9.22	9.50	No
		185	6875	9.23	9.50	No
		209	6995	9.14	9.50	No
		233	7115	8.59	9.50	No
	802.11ax(HE20) (RU52)	2	5935	-15.52	-15.00	No
		1	5955	10.20	10.50	No
		45	6175	9.55	10.50	No
		93	6415	10.35	10.50	No
		97	6435	9.34	9.50	No
		105	6475	8.80	9.50	No
		113	6515	8.98	9.50	No
		117	6535	9.07	9.50	No
		149	6695	9.16	9.50	No
		181	6855	8.62	9.50	No
		185	6875	9.09	9.50	No
		209	6995	8.84	9.50	No
		233	7115	8.84	9.50	No
	802.11ax(HE20) (RU106)	2	5935	-13.40	-13.00	No
		1	5955	9.79	10.50	No

		45	6175	9.57	10.50	No
		93	6415	9.59	10.50	No
		97	6435	9.29	9.50	No
		105	6475	8.79	9.50	No
		113	6515	9.06	9.50	No
		117	6535	8.56	9.50	No
		149	6695	9.09	9.50	No
		181	6855	8.79	9.50	No
		185	6875	9.29	9.50	No
		209	6995	9.11	9.50	No
		233	7115	8.67	9.50	No
	802.11ax(HE20) (RU242)	2	5935	-10.31	-10.00	No
		1	5955	9.69	10.50	No
		45	6175	9.86	10.50	No
		93	6415	10.10	10.50	No
		97	6435	8.79	9.50	No
		105	6475	8.66	9.50	No
		113	6515	9.20	9.50	No
		117	6535	8.96	9.50	No
		149	6695	8.87	9.50	No
		181	6855	9.27	9.50	No
		185	6875	8.93	9.50	No
		209	6995	9.20	9.50	No
		233	7115	8.88	9.50	No
	802.11ax(HE40) (RU484)	3	5965	9.93	10.50	No
		43	6165	9.65	10.50	No
		91	6405	10.09	10.50	No
		99	6445	10.28	10.50	No
		107	6485	9.64	10.50	No
		115	6525	9.83	10.50	No
		123	6565	10.01	10.50	No
		155	6725	10.08	10.50	No
		179	6845	9.64	10.50	No
		187	6885	9.89	10.50	No
		211	7005	10.34	10.50	No
		227	7085	10.19	10.50	No
	802.11ax(HE80) (RU996)	7	5985	9.70	10.50	No
		39	6145	9.99	10.50	No
		87	6385	10.30	10.50	No
		103	6465	10.32	10.50	No
		119	6545	10.35	10.50	No
		151	6705	9.69	10.50	No
		183	6865	9.71	10.50	No

		199	6945	9.99	10.50	No
		215	7025	10.23	10.50	No
	802.11ax(HE160) (RU2*996)	15	6025	9.89	10.50	No
		47	6185	10.35	10.50	No
		79	6345	9.79	10.50	No
		111	6505	9.58	10.50	No
		143	6665	9.95	10.50	No
		175	6825	10.07	10.50	No
		207	6985	9.64	10.50	No

Note: When multiple channel bandwidth configurations in a frequency band have the same maximum tune-up output power, the test configuration is determined by applying the following steps sequentially.

1) The largest channel bandwidth configuration is selected between the multiple configurations in a frequency band with the same maximum tune-up output power.

8.1.9 6G WIFI (MIMO) (Laptop Mode)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
6	802.11a	2	5935	8.46	9.00	No
		1	5955	10.27	10.50	No
		45	6175	10.24	10.50	No
		93	6415	10.08	10.50	No
		97	6435	9.73	10.50	No
		105	6475	10.03	10.50	No
		113	6515	9.98	10.50	No
		117	6535	9.95	10.50	No
		149	6695	9.72	10.50	No
		181	6855	9.69	10.50	No
		185	6875	10.33	10.50	No
		209	6995	10.16	10.50	No
		233	7115	10.33	10.50	No
	802.11ax(HE20) (SU)	2	5935	-6.75	-6.00	No
		1	5955	9.82	10.50	No
		45	6175	10.21	10.50	No
		93	6415	10.16	10.50	No
		97	6435	9.62	10.50	No
		105	6475	10.23	10.50	No
		113	6515	9.69	10.50	No
		117	6535	9.61	10.50	No
		149	6695	10.33	10.50	No
		181	6855	9.79	10.50	No
		185	6875	9.83	10.50	No
		209	6995	9.89	10.50	No
		233	7115	10.13	10.50	No
	802.11ax(HE40) (SU)	3	5965	9.62	10.50	No
		43	6165	10.22	10.50	No
		91	6405	10.00	10.50	No
		99	6445	9.62	10.50	No
		107	6485	10.14	10.50	No
		115	6525	9.59	10.50	No
		123	6565	9.68	10.50	No
		155	6725	9.80	10.50	No
		179	6845	10.25	10.50	No
		187	6885	10.34	10.50	No
		211	7005	9.63	10.50	No
		227	7085	10.20	10.50	No
	802.11ax(HE80)	7	5985	10.31	10.50	No

	(SU)	39	6145	10.35	10.50	No
		87	6385	9.72	10.50	No
		103	6465	10.23	10.50	No
		119	6545	9.79	10.50	No
		151	6705	9.98	10.50	No
		183	6865	10.35	10.50	No
		199	6945	10.14	10.50	No
		215	7025	9.57	10.50	No
	802.11ax(HE160) (SU)	15	6025	9.89	10.50	No
		47	6185	9.79	10.50	No
		79	6345	9.56	10.50	No
		111	6505	9.96	10.50	No
		143	6665	10.23	10.50	No
		175	6825	9.64	10.50	No
		207	6985	10.35	10.50	No
	802.11ax(HE20) (RU26)	2	5935	-17.60	-17.00	No
		1	5955	9.35	9.50	No
		45	6175	9.07	9.50	No
		93	6415	9.03	9.50	No
		97	6435	9.05	9.50	No
		105	6475	9.27	9.50	No
		113	6515	8.57	9.50	No
		117	6535	8.63	9.50	No
		149	6695	8.61	9.50	No
		181	6855	8.59	9.50	No
		185	6875	8.73	9.50	No
		209	6995	8.95	9.50	No
		233	7115	9.30	9.50	No
	802.11ax(HE20) (RU52)	2	5935	-15.40	-15.00	No
		1	5955	9.70	10.50	No
		45	6175	9.57	10.50	No
		93	6415	10.00	10.50	No
		97	6435	9.16	9.50	No
		105	6475	8.67	9.50	No
		113	6515	8.99	9.50	No
		117	6535	8.92	9.50	No
		149	6695	8.64	9.50	No
		181	6855	8.70	9.50	No
		185	6875	8.66	9.50	No
		209	6995	9.34	9.50	No
		233	7115	8.73	9.50	No
	802.11ax(HE20) (RU106)	2	5935	-13.23	-13.00	No
		1	5955	10.19	10.50	No

		45	6175	9.90	10.50	No
		93	6415	10.30	10.50	No
		97	6435	9.07	9.50	No
		105	6475	9.10	9.50	No
		113	6515	9.16	9.50	No
		117	6535	9.11	9.50	No
		149	6695	8.56	9.50	No
		181	6855	8.68	9.50	No
		185	6875	8.88	9.50	No
		209	6995	9.27	9.50	No
		233	7115	9.27	9.50	No
	802.11ax(HE20) (RU242)	2	5935	-10.43	-10.00	No
		1	5955	9.83	10.50	No
		45	6175	10.24	10.50	No
		93	6415	10.03	10.50	No
		97	6435	9.35	9.50	No
		105	6475	9.12	9.50	No
		113	6515	9.09	9.50	No
		117	6535	8.56	9.50	No
		149	6695	9.16	9.50	No
		181	6855	8.92	9.50	No
		185	6875	9.08	9.50	No
		209	6995	8.90	9.50	No
		233	7115	9.00	9.50	No
	802.11ax(HE40) (RU484)	3	5965	10.03	10.50	No
		43	6165	10.30	10.50	No
		91	6405	10.00	10.50	No
		99	6445	10.18	10.50	No
		107	6485	10.25	10.50	No
		115	6525	10.13	10.50	No
		123	6565	10.15	10.50	No
		155	6725	9.64	10.50	No
		179	6845	10.23	10.50	No
		187	6885	9.86	10.50	No
		211	7005	10.08	10.50	No
		227	7085	9.90	10.50	No
	802.11ax(HE80) (RU996)	7	5985	10.15	10.50	No
		39	6145	10.29	10.50	No
		87	6385	9.63	10.50	No
		103	6465	9.81	10.50	No
		119	6545	10.21	10.50	No
		151	6705	9.93	10.50	No
		183	6865	9.66	10.50	No

		199	6945	9.92	10.50	No
		215	7025	10.18	10.50	No
	802.11ax(HE160) (RU2*996)	15	6025	9.72	10.50	No
		47	6185	10.19	10.50	No
		79	6345	10.00	10.50	No
		111	6505	10.18	10.50	No
		143	6665	10.19	10.50	No
		175	6825	9.81	10.50	No
		207	6985	9.99	10.50	No

Note: For WiFi SAR testing was performed on single antenna RF power in SISO mode that is larger to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission used more conservative "Max. (main ant) + Max. (aux. ant) " method to determine SAR compliance. When the sum of 1-g SISO transmission SAR measurement is <1.6 W/kg, or the SPLSR value ≤0.04 the MIMO SAR test is not required.

8.2 Bluetooth

8.2.1 Bluetooth (Aux. Antenna)


Mode	GFSK			$\pi/4$ -DQPSK		
Channel	0	39	78	0	39	78
Frequency (MHz)	2402	2441	2480	2402	2441	2480
Average Power (dBm)	9.45	9.76	9.43	9.20	9.29	9.58
Tune-Up Limit (dBm)	10.00	10.00	10.00	10.00	10.00	10.00
SAR Test Require	Yes	Yes	Yes	No	No	No
Mode	8-DPSK			/		
Channel	0	39	78	/	/	/
Frequency (MHz)	2402	2441	2480	/	/	/
Average Power (dBm)	9.17	9.78	9.79	/	/	/
Tune-Up Limit (dBm)	10.00	10.00	10.00	/	/	/
SAR Test Require	No	No	No	/	/	/
Mode	BLE-1Mbps			BLE-2Mbps		
Channel	0	19	39	1	19	38
Frequency (MHz)	2402	2440	2480	2404	2440	2478
Average Power (dBm)	9.26	9.22	9.17	9.28	9.33	9.32
Tune-Up Limit (dBm)	10.00	10.00	10.00	10.00	10.00	10.00
SAR Test Require	No	No	No	No	No	No

Note: Since Bluetooth BR mode is the maximum output power mode, SAR measurements were performed with test software using DH5 modulation, and SAR measurement is not required for the EDR and LE. When the secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode.

The Bluetooth duty cycle is 76.61% as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the maximum duty cycle is 100%, therefore the actual duty cycle will be scaled up to 100% for Bluetooth reported SAR calculation.


Duty Cycle


Bluetooth-GFSK

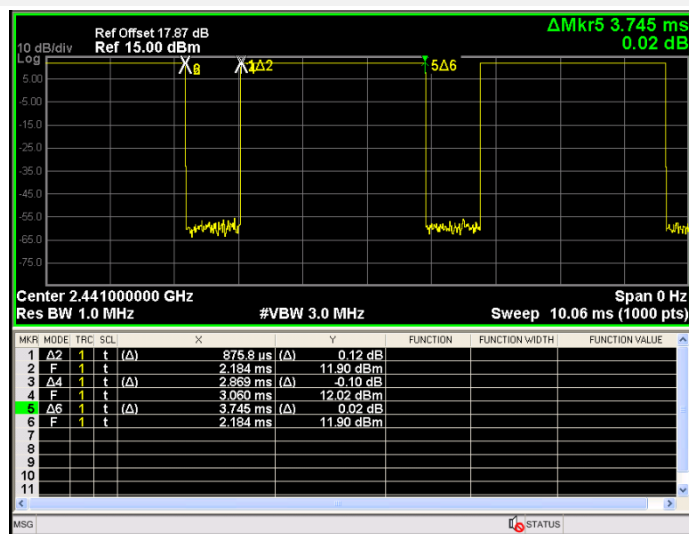

9 TEST EXCLUSION CONSIDERATION

9.1 Antenna Location Sketch

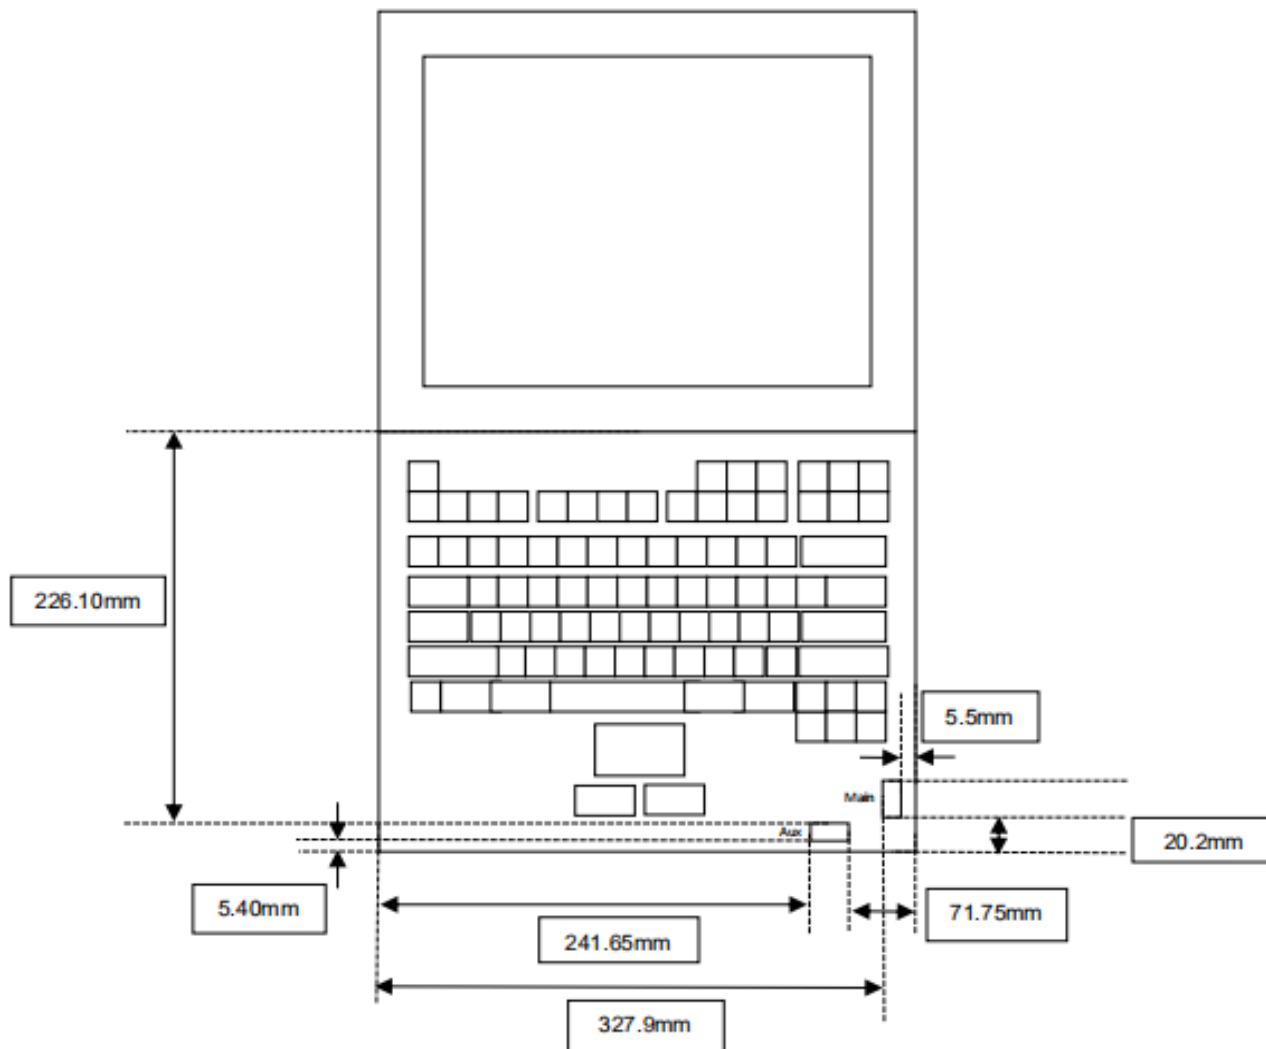

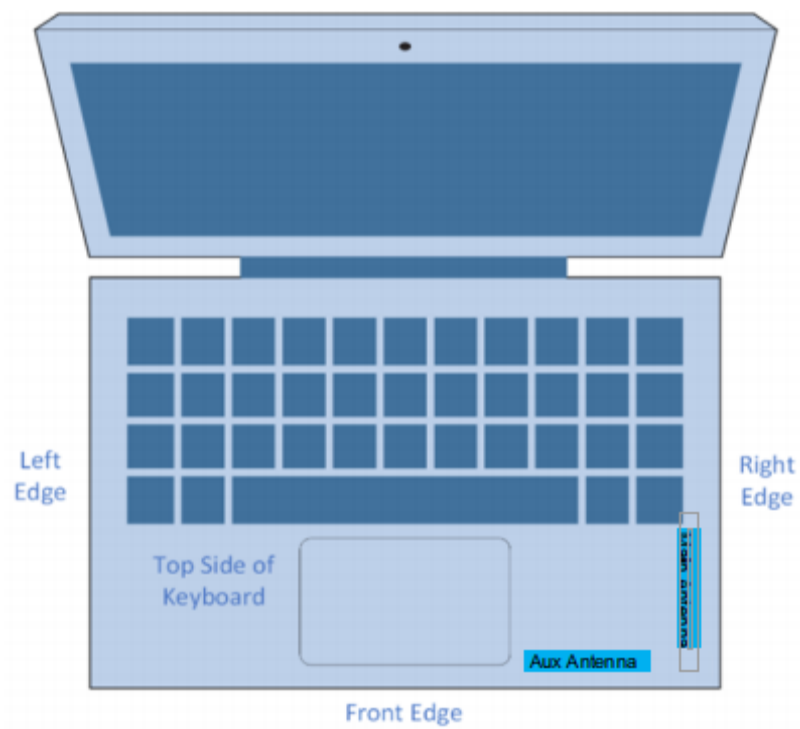

Antenna	Support Bands
Aux.	WLAN 2.4G/5G/6G/BT
Main	WLAN 2.4G/5G/6G

9.2 SAR Test Consideration Table

According with FCC KDB 447498 D04, Appendix B, The SAR-based exemption formula applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power or effective radiated power (ERP), whichever is greater, of less than or equal to the threshold Pth (mW).

This method shall only be used at separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive). The following table shows the power threshold from 5mm to 50mm.

Power Thresholds (mW)					
Frequency (MHz)	At separation distance of ≤ 5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
300	39 mW	65 mW	88 mW	110 mW	129 mW
450	22 mW	44 mW	67 mW	89 mW	112 mW
835	9 mW	25 mW	44 mW	66 mW	90 mW
1900	3 mW	12 mW	26 mW	44 mW	66 mW
2450	3 mW	10 mW	22 mW	38 mW	59 mW
3600	2 mW	8 mW	18 mW	32 mW	49 mW
5800	1 mW	6 mW	14 mW	25 mW	40 mW
Frequency (MHz)	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of 50 mm
300	148 mW	166 mW	184 mW	201 mW	217 mW
450	135 mW	158 mW	180 mW	203 mW	226 mW
835	116 mW	145 mW	175 mW	207 mW	240 mW
1900	92 mW	122 mW	157 mW	195 mW	236 mW
2450	83 mW	111 mW	143 mW	179 mW	219 mW
3600	71 mW	96 mW	125 mW	158 mW	195 mW
5800	58 mW	80 mW	106 mW	136 mW	169 mW

9.2.1 SAR Test Consideration

This host is a notebook computer, under normal use the RF exposure scenarios are shown in the table below:

RF Exposure Position	RF Exposure Scenarios
Bottom Side	Body
Front Edge	Body
Keyboard Side	Limbs
Left Edge	Limbs
Right Edge	Limbs

Aux. Antenna Body RF exposure scenarios

Test Position Configurations	Mode	Bluetooth	WLAN 2.4GHz	U-NII-2A	U-NII-2C	U-NII-3	U-NII-4	U-NII-5/6/7/8
Calculated Frequency (MHz)		2480	2462	5320	5710	5825	5925	6000
Bottom Side	Distance to User (mm)	6.94						
	Max. Peak Power (dBm)	10.00	15.50	11.50	11.00	11.50	11.50	10.50
	Max. Peak Power (mW)	10.00	35.48	14.13	12.59	14.13	14.13	11.22
	Exclusion Threshold (mW)	5.07	5.10	2.91	2.76	2.72	2.69	2.66
	SAR Test Required	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Front Edge	Distance to User (mm)	5.4						
	Max. Peak Power (dBm)	10.00	15.50	11.50	11.00	11.50	11.50	10.50
	Max. Peak Power (mW)	10.00	35.48	14.13	12.59	14.13	14.13	11.22
	Exclusion Threshold (mW)	3.15	3.16	1.73	1.64	1.61	1.59	1.57
	SAR Test Required	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Main Antenna Body RF exposure scenarios

Test Position Configurations	Mode	WLAN 2.4GHz	U-NII-2A	U-NII-2C	U-NII-3	U-NII-4	U-NII-5/6/7/8
Calculated Frequency (MHz)		2462	5320	5710	5825	5925	6000
Bottom Side	Distance to User (mm)	6.94					
	Max. Peak Power (dBm)	15.50	11.50	11.00	11.50	11.50	10.50
	Max. Peak Power (mW)	35.48	14.13	12.59	14.13	14.13	11.22
	Exclusion Threshold (mW)	5.10	2.91	2.76	2.72	2.69	2.66
	SAR Test Required	Yes	Yes	Yes	Yes	Yes	Yes
Front Edge	Distance to User (mm)	20.2					
	Max. Peak Power (dBm)	15.50	11.50	11.00	11.50	11.50	10.50
	Max. Peak Power (mW)	35.48	14.13	12.59	14.13	14.13	11.22
	Exclusion Threshold (mW)	38.97	26.55	25.64	25.38	25.17	25.01
	SAR Test Required	Yes	Yes	Yes	Yes	Yes	Yes

Aux. Antenna Limbs RF exposure scenarios

Test Position Configurations	Mode	Bluetooth	WLAN 2.4GHz	U-NII-2A	U-NII-2C	U-NII-3	U-NII-4	U-NII-5/6/7/8
Calculated Frequency (MHz)		2480	2462	5320	5710	5825	5925	6000
Keyboard Side	Distance to User (mm)	5						
	Max. Peak Power (dBm)	10.00	15.50	11.50	11.00	11.50	11.50	10.50
	Max. Peak Power (mW)	10.00	35.48	14.13	12.59	14.13	14.13	11.22
	Exclusion Threshold (mW)	4.08	4.10	2.21	2.09	2.06	2.03	2.01
	SAR Test Required	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Left Edge	Distance to User (mm)	241.65						
	Max. Peak Power (dBm)	10.00	15.50	11.50	11.00	11.50	11.50	10.50
	Max. Peak Power (mW)	10.00	35.48	14.13	12.59	14.13	14.13	11.22
	Exclusion Threshold (mW)	6581.19	6579.22	6790.79	6810.56	6816.14	6820.90	6824.43
	SAR Test Required	No	No	No	No	No	No	No
Right Edge	Distance to User (mm)	71.75						
	Max. Peak Power (dBm)	10.00	15.50	11.50	11.00	11.50	11.50	10.50
	Max. Peak Power (mW)	10.00	35.48	14.13	12.59	14.13	14.13	11.22
	Exclusion Threshold (mW)	651.30	652.36	549.54	540.95	538.56	536.52	535.02
	SAR Test Required	No	No	No	No	No	No	No

Main Antenna Limbs RF exposure scenarios

Test Position Configurations	Mode	WLAN 2.4GHz	U-NII-2A	U-NII-2C	U-NII-3	U-NII-4	U-NII-5/6/7/8
Calculated Frequency (MHz)		2462	5320	5710	5825	5925	6000
Keyboard Side	Distance to User (mm)	5					
	Max. Peak Power (dBm)	15.50	11.50	11.00	11.50	11.50	10.50
	Max. Peak Power (mW)	35.48	14.13	12.59	14.13	14.13	11.22
	Exclusion Threshold (mW)	4.10	2.21	2.09	2.06	2.03	2.01
	SAR Test Required	Yes	Yes	Yes	Yes	Yes	Yes
Left Edge	Distance to User (mm)	327.9					
	Max. Peak Power (dBm)	15.50	11.50	11.00	11.50	11.50	10.50
	Max. Peak Power (mW)	35.48	14.13	12.59	14.13	14.13	11.22
	Exclusion Threshold (mW)	11761.28	12775.51	12872.91	12900.50	12924.09	12941.56
	SAR Test Required	No	No	No	No	No	No
Right Edge	Distance to User (mm)	5.5					
	Max. Peak Power (dBm)	15.50	11.50	11.00	11.50	11.50	10.50
	Max. Peak Power (mW)	35.48	14.13	12.59	14.13	14.13	11.22
	Exclusion Threshold (mW)	4.92	2.69	2.55	2.51	2.48	2.45
	SAR Test Required	Yes	Yes	Yes	Yes	Yes	Yes

Note:

1. Maximum power is the source-based time-average power and represents the maximum RF output power including tune-up tolerance among production units
2. Per KDB 447498 D04, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. Per KDB 447498 D04, standalone SAR test exclusion threshold is applied; If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold
4. Per KDB 447498 D04, for separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive), the threshold P_{th} (mW) is given by Following:

$$P_{th}(mW) = \begin{cases} ERP_{20cm}(d/20cm)^x & d \leq 20cm \\ ERP_{20cm} & 20cm < d \leq 40cm \end{cases}$$

where

$$x = -\log_{10} \left(\frac{60}{ERP_{20cm} \sqrt{f}} \right)$$

- a. f (GHz) is the RF channel transmit frequency in GHz
- b. d is the separation distance (cm), The result is rounded to one decimal place for comparison
- c. ERP_{20cm} are determined by:

$$ERP_{20cm}(mW) = f(x) = \begin{cases} 2040f & 0.3GHz \leq f < 1.5GHz \\ 3060 & 1.5GHz \leq f \leq 6GHz \end{cases}$$

5. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion.8. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
6. Per KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions.
 - a. When KDB Publication 447498 D04 SAR test exclusion applies to the OFDM configuration.
 - b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
7. Per KDB 248227 D01 SAR is not required for the following U-NII-1 and U-NII-2A bands conditions.
 - a. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
 - b. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

10 TEST RESULT

1. The reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WIFI signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".
 - c. For WIFI/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Absorbed power density (APD) using a 4cm² averaging area is reported based on SAR measurements.
3. Per KDB 447498 D04, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
4. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg

10.1Bluetooth

Mode	Antenna Manufacturer	Antenna	Test State	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Scaled SAR (W/kg)	Meas. No.
Body																
DH5	ZTX	Aux.	Laptop	Bottom Side	0	78	2480	-0.13	0.155	9.45	10.00	1.135	76.61	1.087	0.191	/
	ZTX	Aux.	Laptop	Bottom Side	0	0	2402	-0.18	0.171	9.76	10.00	1.057	76.61	1.087	0.196	1#
	ZTX	Aux.	Laptop	Bottom Side	0	39	2441	-0.06	0.158	9.43	10.00	1.140	76.61	1.087	0.196	/
	ICT	Aux.	Laptop	Bottom Side	0	0	2402	0.14	0.102	9.76	10.00	1.057	76.61	1.087	0.117	/
	ZTX	Aux.	Laptop	Front Edge	0	0	2402	0.10	0.050	9.76	10.00	1.057	76.61	1.087	0.057	/
	ICT	Aux.	Laptop	Front Edge	0	0	2402	0.04	0.038	9.76	10.00	1.057	76.61	1.087	0.044	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.																

Mode	Antenna Manufacturer	Antenna	Test State	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	10g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	10g Scaled SAR (W/kg)	Meas. No.
Limbs																
DH5	ZTX	Aux.	Laptop	Keyboard Side	0	78	2480	0.02	0.092	9.45	10.00	1.135	76.61	1.087	0.114	/
	ZTX	Aux.	Laptop	Keyboard Side	0	0	2402	0.03	0.105	9.76	10.00	1.057	76.61	1.087	0.121	14#
	ZTX	Aux.	Laptop	Keyboard Side	0	39	2441	0.16	0.072	9.43	10.00	1.140	76.61	1.087	0.089	/
	ICT	Aux.	Laptop	Keyboard Side	0	0	2402	0.03	0.096	9.76	10.00	1.057	76.61	1.087	0.110	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.																

10.2WIFI 2.4GHz

Mode	Antenna Manufacturer	Antenna	Test State	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Scaled SAR (W/kg)	Meas. No.
Body																
802.11b	ZTX	Aux.	Laptop	Bottom Side	0	6	2437	0.02	0.729	15.18	15.50	1.076	97.49	1.026	0.805	/
	ZTX	Aux.	Laptop	Bottom Side	0	1	2412	-0.01	0.893	15.21	15.50	1.069	97.49	1.026	0.979	2#
	ZTX	Aux.	Laptop	Bottom Side	0	11	2462	-0.03	0.740	15.16	15.50	1.081	97.49	1.026	0.821	/
	ICT	Aux.	Laptop	Bottom Side	0	1	2412	-0.18	0.850	15.21	15.50	1.069	97.49	1.026	0.932	/
	ZTX	Aux.	Laptop	Front Edge	0	1	2412	-0.10	0.249	15.21	15.50	1.069	97.49	1.026	0.273	/
	ICT	Aux.	Laptop	Front Edge	0	1	2412	0.13	0.199	15.21	15.50	1.069	97.49	1.026	0.218	/
	ZTX	Main	Laptop	Bottom Side	0	1	2412	-0.04	0.412	15.45	15.50	1.012	97.49	1.026	0.428	/
	ICT	Main	Laptop	Bottom Side	0	6	2437	-0.10	0.419	15.15	15.50	1.084	97.49	1.026	0.466	/
	ICT	Main	Laptop	Bottom Side	0	1	2412	0.04	0.453	15.45	15.50	1.012	97.49	1.026	0.470	3#
	ICT	Main	Laptop	Bottom Side	0	11	2462	-0.11	0.410	15.15	15.50	1.084	97.49	1.026	0.456	/
	ZTX	Main	Laptop	Front Edge	0	1	2412	-0.02	0.042	15.45	15.50	1.012	97.49	1.026	0.044	/
	ICT	Main	Laptop	Front Edge	0	1	2412	-0.02	0.052	15.45	15.50	1.012	97.49	1.026	0.054	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.																

Mode	Antenna Manufacturer	Antenna	Test State	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	10g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	10g Scaled SAR (W/kg)	Meas. No.
Limbs																
802.11b	ZTX	Aux.	Laptop	Keyboard Side	0	6	2437	-0.10	0.420	15.18	15.50	1.076	97.49	1.026	0.464	/
	ZTX	Aux.	Laptop	Keyboard Side	0	1	2412	0.00	0.502	15.21	15.50	1.069	97.49	1.026	0.551	15#
	ZTX	Aux.	Laptop	Keyboard Side	0	11	2462	0.00	0.361	15.16	15.50	1.081	97.49	1.026	0.400	/
	ICT	Aux.	Laptop	Keyboard Side	0	1	2412	-0.18	0.476	15.21	15.50	1.069	97.49	1.026	0.522	/
	ZTX	Main	Laptop	Keyboard Side	0	1	2412	-0.07	0.490	15.21	15.50	1.069	97.49	1.026	0.537	/
	ICT	Main	Laptop	Keyboard Side	0	6	2437	-0.12	0.492	15.18	15.50	1.076	97.49	1.026	0.543	/
	ICT	Main	Laptop	Keyboard Side	0	1	2412	-0.05	0.627	15.21	15.50	1.069	97.49	1.026	0.688	16#
	ICT	Main	Laptop	Keyboard Side	0	11	2462	0.15	0.470	15.16	15.50	1.081	97.49	1.026	0.521	/
	ZTX	Main	Laptop	Right Edge	0	1	2412	-0.04	0.030	15.21	15.50	1.069	97.49	1.026	0.033	/
	ICT	Main	Laptop	Right Edge	0	1	2412	0.08	0.086	15.21	15.50	1.069	97.49	1.026	0.094	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.																

10.3 WIFI 5GHz

Fre. Band	Mode	Antenna Manufacturer	Antenna	Test State	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Scaled SAR (W/kg)	Meas. No.
Body																	
5.3G	802.11 ac80	ZTX	Aux.	Laptop	Bottom Side	0	58	5290	0.04	0.370	11.43	11.50	1.016	97.68	1.024	0.385	/
		ICT	Aux.	Laptop	Bottom Side	0	58	5290	-0.04	0.440	11.43	11.50	1.016	97.68	1.024	0.458	/
		ZTX	Aux.	Laptop	Front Edge	0	58	5290	-0.09	1.130	11.43	11.50	1.016	97.68	1.024	1.176	4#
		ICT	Aux.	Laptop	Front Edge	0	58	5290	0.19	0.995	11.43	11.50	1.016	97.68	1.024	1.035	/
		ZTX	Main	Laptop	Bottom Side	0	58	5290	-0.02	0.208	11.21	11.50	1.069	97.68	1.024	0.228	/
		ICT	Main	Laptop	Bottom Side	0	58	5290	-0.02	0.291	11.21	11.50	1.069	97.68	1.024	0.319	5#
		ZTX	Main	Laptop	Front Edge	0	58	5290	-0.13	0.026	11.21	11.50	1.069	97.68	1.024	0.028	/
		ICT	Main	Laptop	Front Edge	0	58	5290	-0.12	0.033	11.21	11.50	1.069	97.68	1.024	0.036	/
5.6G	802.11 ac80	ZTX	Aux.	Laptop	Bottom Side	0	106	5530	-0.13	0.308	10.68	11.00	1.076	97.68	1.024	0.339	/
		ICT	Aux.	Laptop	Bottom Side	0	106	5530	0.00	0.392	10.68	11.00	1.076	97.68	1.024	0.432	/
		ZTX	Aux.	Laptop	Front Edge	0	106	5530	-0.11	1.030	10.68	11.00	1.076	97.68	1.024	1.135	6#
		ZTX	Aux.	Laptop	Front Edge	0	122	5610	0.09	0.892	10.62	11.00	1.091	97.68	1.024	0.997	/
		ZTX	Aux.	Laptop	Front Edge	0	138	5690	0.09	0.921	10.42	11.00	1.143	97.68	1.024	1.078	/
		ICT	Aux.	Laptop	Front Edge	0	106	5530	0.04	0.981	10.68	11.00	1.076	97.68	1.024	1.081	/
		ZTX	Main	Laptop	Bottom Side	0	106	5530	-0.07	0.134	10.89	11.00	1.026	97.68	1.024	0.141	/
		ICT	Main	Laptop	Bottom Side	0	106	5530	-0.03	0.164	10.89	11.00	1.026	97.68	1.024	0.172	/
		ICT	Main	Laptop	Bottom Side	0	122	5610	-0.17	0.159	10.63	11.00	1.089	97.68	1.024	0.177	/
		ICT	Main	Laptop	Bottom Side	0	138	5690	-0.08	0.292	10.65	11.00	1.084	97.68	1.024	0.324	7#
		ZTX	Main	Laptop	Front Edge	0	106	5530	0.01	0.016	10.89	11.00	1.026	97.68	1.024	0.017	/
		ICT	Main	Laptop	Front Edge	0	106	5530	0.03	0.012	10.89	11.00	1.026	97.68	1.024	0.013	/
5.8G	802.11 ac80	ZTX	Aux.	Laptop	Bottom Side	0	155	5775	0.15	0.410	11.20	11.50	1.072	97.68	1.024	0.450	/
		ICT	Aux.	Laptop	Bottom Side	0	155	5775	0.09	0.434	11.20	11.50	1.072	97.68	1.024	0.476	/
		ZTX	Aux.	Laptop	Front Edge	0	155	5775	-0.19	0.924	11.20	11.50	1.072	97.68	1.024	1.014	/
		ICT	Aux.	Laptop	Front Edge	0	155	5775	-0.02	1.050	11.20	11.50	1.072	97.68	1.024	1.153	8#
		ZTX	Main	Laptop	Bottom Side	0	155	5775	0.08	0.193	11.23	11.50	1.064	97.68	1.024	0.210	/
		ICT	Main	Laptop	Bottom Side	0	155	5775	-0.05	0.287	11.23	11.50	1.064	97.68	1.024	0.313	9#
		ZTX	Main	Laptop	Front Edge	0	155	5775	-0.01	0.012	11.23	11.50	1.064	97.68	1.024	0.013	/
		ICT	Main	Laptop	Front Edge	0	155	5775	-0.16	0.015	11.23	11.50	1.064	97.68	1.024	0.016	/
5.9G	802.11 ac80	ZTX	Aux.	Laptop	Bottom Side	0	171	5855	-0.18	0.135	11.26	11.50	1.057	97.68	1.024	0.146	/
		ICT	Aux.	Laptop	Bottom Side	0	171	5855	0.10	0.166	11.26	11.50	1.057	97.68	1.024	0.180	/
		ZTX	Aux.	Laptop	Front Edge	0	171	5855	0.00	0.482	11.26	11.50	1.057	97.68	1.024	0.522	/
		ICT	Aux.	Laptop	Front Edge	0	171	5855	-0.04	0.531	11.26	11.50	1.057	97.68	1.024	0.575	10#
		ZTX	Main	Laptop	Bottom Side	0	171	5855	0.14	0.321	11.25	11.50	1.059	97.68	1.024	0.348	/

		ICT	Main	Laptop	Bottom Side	0	171	5855	0.08	0.339	11.25	11.50	1.059	97.68	1.024	0.368	11#
		ZTX	Main	Laptop	Front Edge	0	171	5855	-0.10	0.023	11.25	11.50	1.059	97.68	1.024	0.025	/
		ICT	Main	Laptop	Front Edge	0	171	5855	0.08	0.020	11.25	11.50	1.059	97.68	1.024	0.022	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.																	

Fre. Band	Mode	Antenna Manufact urer	Antenna	Test State	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	10g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	10g Scaled SAR (W/kg)	Meas. No.
Limbs																	
5.3G	802.11 ac80	ZTX	Aux.	Laptop	Keyboard Side	0	58	5290	0.02	0.316	11.43	11.50	1.016	97.68	1.024	0.329	17#
		ICT	Aux.	Laptop	Keyboard Side	0	58	5290	0.02	0.282	11.43	11.50	1.016	97.68	1.024	0.293	/
		ZTX	Main	Laptop	Keyboard Side	0	58	5290	-0.03	0.308	11.21	11.50	1.069	97.68	1.024	0.337	18#
		ICT	Main	Laptop	Keyboard Side	0	58	5290	-0.05	0.262	11.21	11.50	1.069	97.68	1.024	0.287	/
		ZTX	Main	Laptop	Right Edge	0	58	5290	0.07	0.263	11.21	11.50	1.069	97.68	1.024	0.288	/
		ICT	Main	Laptop	Right Edge	0	58	5290	-0.11	0.275	11.21	11.50	1.069	97.68	1.024	0.301	/
5.6G	802.11 ac80	ZTX	Aux.	Laptop	Keyboard Side	0	106	5530	0.09	0.284	10.68	11.00	1.076	97.68	1.024	0.313	19#
		ZTX	Aux.	Laptop	Keyboard Side	0	122	5610	0.14	0.165	10.62	11.00	1.091	97.68	1.024	0.184	/
		ZTX	Aux.	Laptop	Keyboard Side	0	138	5690	0.18	0.155	10.42	11.00	1.143	97.68	1.024	0.181	/
		ICT	Aux.	Laptop	Keyboard Side	0	106	5530	-0.19	0.215	10.68	11.00	1.076	97.68	1.024	0.237	/
		ZTX	Main	Laptop	Keyboard Side	0	106	5530	-0.05	0.279	10.89	11.00	1.026	97.68	1.024	0.293	20#
		ZTX	Main	Laptop	Keyboard Side	0	122	5610	-0.08	0.186	10.63	11.00	1.089	97.68	1.024	0.207	/
		ZTX	Main	Laptop	Keyboard Side	0	138	5690	0.06	0.202	10.65	11.00	1.084	97.68	1.024	0.224	/
		ICT	Main	Laptop	Keyboard Side	0	106	5530	-0.11	0.139	10.89	11.00	1.026	97.68	1.024	0.146	/
		ZTX	Main	Laptop	Right Edge	0	106	5530	0.15	0.155	10.89	11.00	1.026	97.68	1.024	0.163	/
5.8G	802.11 ac80	ICT	Main	Laptop	Right Edge	0	106	5530	-0.05	0.182	10.89	11.00	1.026	97.68	1.024	0.191	/
		ZTX	Aux.	Laptop	Keyboard Side	0	155	5775	0.05	0.339	11.20	11.50	1.072	97.68	1.024	0.372	21#
		ICT	Aux.	Laptop	Keyboard Side	0	155	5775	0.16	0.285	11.20	11.50	1.072	97.68	1.024	0.313	/
		ZTX	Main	Laptop	Keyboard Side	0	155	5775	-0.07	0.291	11.23	11.50	1.064	97.68	1.024	0.317	/
		ICT	Main	Laptop	Keyboard Side	0	155	5775	-0.03	0.313	11.23	11.50	1.064	97.68	1.024	0.341	22#
		ZTX	Main	Laptop	Right Edge	0	155	5775	-0.05	0.201	11.23	11.50	1.064	97.68	1.024	0.219	/
5.9G	802.11 ac80	ICT	Main	Laptop	Right Edge	0	155	5775	-0.03	0.285	11.23	11.50	1.064	97.68	1.024	0.311	/
		ZTX	Aux.	Laptop	Keyboard Side	0	171	5855	-0.05	0.143	11.26	11.50	1.057	97.68	1.024	0.155	23#
		ICT	Aux.	Laptop	Keyboard Side	0	171	5855	-0.02	0.132	11.26	11.50	1.057	97.68	1.024	0.143	/
		ZTX	Main	Laptop	Keyboard Side	0	171	5855	0.09	0.298	11.25	11.50	1.059	97.68	1.024	0.323	24#
		ICT	Main	Laptop	Keyboard Side	0	171	5855	0.10	0.212	11.25	11.50	1.059	97.68	1.024	0.230	/
		ZTX	Main	Laptop	Right Edge	0	171	5855	-0.16	0.201	11.25	11.50	1.059	97.68	1.024	0.218	/
5.9G	802.11 ac80	ICT	Main	Laptop	Right Edge	0	171	5855	0.09	0.274	11.25	11.50	1.059	97.68	1.024	0.297	/
		Note: Refer to ANNEX C for the detailed test data for each test configuration.															

10.4 WIFI 6GHz

Mode	Antenna Manufacturer	Antenna	Test Position	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty Factor	1g Scaled SAR (W/kg)	Measured APD 4cm ² [W/m ²]	Scaled APD [W/m ²]	Meas. No.
Body																		
802.11 ax160	ZTX	Aux.	Laptop	Bottom Side	0	47	6185	-0.19	0.385	10.49	10.50	1.002	98.70	1.013	0.391	1.080	1.096	/
	ICT	Aux.	Laptop	Bottom Side	0	47	6185	0.19	0.236	10.49	10.50	1.002	98.70	1.013	0.240	1.540	1.563	/
	ZTX	Aux.	Laptop	Front Edge	0	47	6185	-0.06	0.308	10.49	10.50	1.002	98.70	1.013	0.313	3.790	3.847	/
	ICT	Aux.	Laptop	Front Edge	0	15	6025	0.06	0.590	10.32	10.50	1.042	98.70	1.013	0.623	3.850	4.064	/
	ICT	Aux.	Laptop	Front Edge	0	47	6185	-0.19	0.616	10.49	10.50	1.002	98.70	1.013	0.625	4.020	4.080	12#
	ICT	Aux.	Laptop	Front Edge	0	79	6345	-0.04	0.303	10.19	10.50	1.074	98.70	1.013	0.330	1.980	2.154	/
	ICT	Aux.	Laptop	Front Edge	0	111	6505	0.08	0.336	10.31	10.50	1.045	98.70	1.013	0.356	2.190	2.318	/
	ICT	Aux.	Laptop	Front Edge	0	143	6665	-0.16	0.271	10.14	10.50	1.086	98.70	1.013	0.298	1.770	1.947	/
	ICT	Aux.	Laptop	Front Edge	0	175	6825	-0.11	0.476	10.15	10.50	1.084	98.70	1.013	0.523	3.110	3.415	/
	ICT	Aux.	Laptop	Front Edge	0	207	6985	0.12	0.529	10.17	10.50	1.079	98.70	1.013	0.578	3.450	3.771	/
	ZTX	Main	Laptop	Bottom Side	0	175	6825	-0.07	0.383	10.48	10.50	1.005	98.70	1.013	0.390	2.560	2.606	/
	ICT	Main	Laptop	Bottom Side	0	15	6025	0.17	0.403	10.19	10.50	1.074	98.70	1.013	0.438	2.700	2.937	/
	ICT	Main	Laptop	Bottom Side	0	47	6185	-0.04	0.486	10.38	10.50	1.028	98.70	1.013	0.506	3.250	3.384	/
	ICT	Main	Laptop	Bottom Side	0	79	6345	-0.08	0.422	10.15	10.50	1.084	98.70	1.013	0.463	2.820	3.097	/
	ICT	Main	Laptop	Bottom Side	0	111	6505	-0.07	0.180	10.48	10.50	1.005	98.70	1.013	0.183	1.200	1.222	/
	ICT	Main	Laptop	Bottom Side	0	143	6665	-0.10	0.302	10.47	10.50	1.007	98.70	1.013	0.308	2.020	2.061	/
	ICT	Main	Laptop	Bottom Side	0	175	6825	-0.03	0.607	10.48	10.50	1.005	98.70	1.013	0.618	4.060	4.133	13#
	ICT	Main	Laptop	Bottom Side	0	207	6985	0.00	0.304	9.93	10.50	1.140	98.70	1.013	0.351	2.033	2.348	/
	ZTX	Main	Laptop	Front Edge	0	175	6825	-0.16	0.035	10.48	10.50	1.005	98.70	1.013	0.036	0.234	0.238	/
	ICT	Main	Laptop	Front Edge	0	175	6825	-0.05	0.031	10.48	10.50	1.005	98.70	1.013	0.032	0.207	0.211	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.																		

Mode	Antenna Manufacturer	Antenna	Test Position	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	10g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty Factor	10g Scaled SAR (W/kg)	Measured APD 4cm² [W/m²]	Scaled APD [W/m²]	Meas. No.
Limbs																		
802.11 ax160	ZTX	Aux.	Laptop	Keyboard Side	0	15	6025	-0.02	0.441	10.32	10.50	1.042	98.70	1.013	0.465	10.100	10.661	/
	ZTX	Aux.	Laptop	Keyboard Side	0	47	6185	0.13	0.432	10.49	10.50	1.002	98.70	1.013	0.438	9.930	10.079	/
	ZTX	Aux.	Laptop	Keyboard Side	0	79	6345	-0.07	0.448	10.19	10.50	1.074	98.70	1.013	0.487	10.300	11.206	25#
	ZTX	Aux.	Laptop	Keyboard Side	0	111	6505	0.00	0.248	10.31	10.50	1.045	98.70	1.013	0.263	5.700	6.034	/
	ZTX	Aux.	Laptop	Keyboard Side	0	143	6665	-0.04	0.343	10.14	10.50	1.086	98.70	1.013	0.377	7.890	8.680	/
	ZTX	Aux.	Laptop	Keyboard Side	0	175	6825	-0.11	0.412	10.15	10.50	1.084	98.70	1.013	0.452	9.470	10.399	/
	ZTX	Aux.	Laptop	Keyboard Side	0	207	6985	0.00	0.381	10.17	10.50	1.079	98.70	1.013	0.416	8.760	9.575	/
	ICT	Aux.	Laptop	Keyboard Side	0	47	6185	-0.13	0.431	10.49	10.50	1.002	98.70	1.013	0.437	9.910	10.059	/
	ZTX	Main	Laptop	Keyboard Side	0	15	6025	-0.09	0.403	10.19	10.50	1.074	98.70	1.013	0.438	9.410	10.238	/
	ZTX	Main	Laptop	Keyboard Side	0	47	6185	0.18	0.478	10.38	10.50	1.028	98.70	1.013	0.498	11.100	11.559	/
	ZTX	Main	Laptop	Keyboard Side	0	79	6345	-0.13	0.339	10.15	10.50	1.084	98.70	1.013	0.372	7.920	8.697	/
	ZTX	Main	Laptop	Keyboard Side	0	111	6505	0.12	0.174	10.48	10.50	1.005	98.70	1.013	0.177	4.060	4.133	/
	ZTX	Main	Laptop	Keyboard Side	0	143	6665	-0.14	0.185	10.47	10.50	1.007	98.70	1.013	0.189	4.320	4.407	/
	ZTX	Main	Laptop	Keyboard Side	0	175	6825	-0.02	0.518	10.48	10.50	1.005	98.70	1.013	0.527	12.100	12.319	26#
	ZTX	Main	Laptop	Keyboard Side	0	207	6985	-0.09	0.193	9.93	10.50	1.140	98.70	1.013	0.223	4.510	5.208	/
	ICT	Main	Laptop	Keyboard Side	0	175	6825	0.19	0.442	10.48	10.50	1.005	98.70	1.013	0.450	10.300	10.486	/
	ZTX	Main	Laptop	Right Edge	0	175	6825	-0.03	0.200	10.48	10.50	1.005	98.70	1.013	0.204	4.670	4.754	/
	ICT	Main	Laptop	Right Edge	0	175	6825	-0.19	0.343	10.48	10.50	1.005	98.70	1.013	0.349	8.010	8.155	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.																		

11 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

Frequency Band (MHz)	Wireless Band	Antenna manufacturer	Test Mode	Antenna	RF Exposure Conditions	Test Position	Highest Measured SAR (W/kg)	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Largest to Smallest SAR Ratio
2412	802.11b	ZTX	Laptop	Aux.	Body	Bottom Side	0.893	Yes	0.863	1.03
2412	802.11b	ICT	Laptop	Aux.	Body	Bottom Side	0.850	Yes	0.814	1.04
5290	802.11ac80	ZTX	Laptop	Aux.	Body	Front Edge	1.130	Yes	1.090	1.04
5290	802.11ac80	ICT	Laptop	Aux.	Body	Front Edge	0.995	Yes	0.961	1.04
5530	802.11ac80	ZTX	Laptop	Aux.	Body	Front Edge	1.030	Yes	1.010	1.02
5610	802.11ac80	ZTX	Laptop	Aux.	Body	Front Edge	0.892	Yes	0.859	1.04
5690	802.11ac80	ZTX	Laptop	Aux.	Body	Front Edge	0.921	Yes	0.898	1.03
5530	802.11ac80	ICT	Laptop	Aux.	Body	Front Edge	0.981	Yes	0.957	1.03
5775	802.11ac80	ZTX	Laptop	Aux.	Body	Front Edge	0.924	Yes	0.900	1.03
5775	802.11ac80	ICT	Laptop	Aux.	Body	Front Edge	1.050	Yes	1.020	1.03

Note: The ratio of largest to smallest SAR for the original and first repeated measurements is < 1.20 , the second repeated measurement is not required.

12 SIMULTANEOUS TRANSMISSION

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR). According KDB 447498 D04, simultaneous transmission:

- a) $SPLSR = (SAR1 + SAR2)^{1.5} / R_i$ (min. separation distance, mm), and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
SAR1 is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition.
SAR2 is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition as the first.
- b) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
- c) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

12.1 Simultaneous Transmission Mode Considerations

No.	Simultaneous Tx Combination	Body&Limbs
1	Bluetooth + WLAN 5GHz (Antenna Auxiliary) + WLAN 5GHz (Antenna Main)	Yes
2	Bluetooth + WLAN 6GHz (Antenna Auxiliary) + WLAN 6GHz (Antenna Main)	Yes
3	WLAN 2.4GHz (Antenna Main) + WLAN 2.4GHz (Antenna Auxiliary) + WLAN 5GHz (Antenna Auxiliary) + WLAN 5GHz (Antenna Main)	Yes
4	WLAN 2.4GHz (Antenna Main) + WLAN 2.4GHz (Antenna Auxiliary) + WLAN 6GHz (Antenna Auxiliary) + WLAN 6GHz (Antenna Main)	Yes

Note:

1. The EUT supports the Antenna Auxiliary with TX/RX diversity function for WLAN and Bluetooth, the Antenna Main with TX/RX diversity function for WLAN.
2. WLAN 2.4GHz and Bluetooth will not be transmitting from the Antenna Auxiliary at same time.
3. The simultaneous transmission combinations of the more antennas contain combinations of less antennas, so only the worst simultaneous transmission combinations is shown in this report.


12.2Body Simultaneous Transmission SAR Evaluation

State	Position	Stand alone SAR							SUM SAR				SPLSR SAR	
		1	2	3	4	5	6	7						
		Bluetooth	WLAN 2.4GHz (Antenna Auxiliary)	WLAN 2.4GHz (Antenna Main)	WLAN 5GHz MAX (Antenna Auxiliary)	WLAN 5GHz MAX (Antenna Main)	WLAN 6GHz (Antenna Auxiliary)	WLAN 6GHz (Antenna Main)	Sum SAR (1+5+6)	Sum SAR (1+6+7)	Sum SAR (2+3+4+ 5)	Sum SAR (2+3+6+ 7)	Sum SAR (2+3+4+ 5)	Sum SAR (2+3+6+ 7)
Laptop	Bottom Side	0.196	0.979	0.470	0.476	0.368	0.391	0.618	0.955	1.205	2.293	2.458	0.04 ^{1#}	0.04 ^{2#}
Laptop	Front Edge	0.057	0.273	0.054	1.176	0.036	0.625	0.036	0.718	0.718	1.539	0.988	/	/
Note: 1: The highest Summed 1g SAR is 2.458 W/Kg > 1.6 W/kg, so Simultaneous Transmission SAR test exclusion is determined by the SAR to peak location separation ratio. 2: The simultaneous transmission combinations of the more antennas contain combinations of less antennas, so only the worst SPLSR simultaneous transmission combinations is shown in this report. 3: The SPLSR is < 0.04, so Simultaneous Transmission SAR test is not required.														


12.3Limbs Simultaneous Transmission SAR Evaluation

State	Position	Stand alone SAR							SUM SAR			
		1	2	3	4	5	6	7				
		Bluetooth	WLAN 2.4GHz (Antenna Auxiliary)	WLAN 2.4GHz (Antenna Main)	WLAN 5GHz MAX (Antenna Auxiliary)	WLAN 5GHz MAX (Antenna Main)	WLAN 6GHz (Antenna Auxiliary)	WLAN 6GHz (Antenna Main)	Sum SAR (1+5+6)	Sum SAR (1+6+7)	Sum SAR (2+3+4+5)	Sum SAR (2+3+6+7)
Laptop	Keyboard Side	0.121	0.551	0.688	0.372	0.341	0.487	0.527	0.949	1.135	1.952	2.253
Laptop	Right Edge	0.000	0.000	0.094	0.000	0.311	0.000	0.349	0.311	0.349	0.405	0.443
Note: 1: The highest Summed 10g SAR is 2.253 W/Kg < 4.0 W/kg, so Simultaneous Transmission SAR test is not required.												

Case 1#	Band	Position	SAR (W/kg)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Plot No				X	Y	Z				
1	WLAN2.4G Ant.Aux+WLAN5G Ant.Aux	Bottom Side	1.455	0.000	0.074	-0.179	87.5	2.29	0.04	Not required
2	WLAN2.4G Ant.Main+WLAN5G Ant.Main		0.838	0.009	0.161	-0.176				

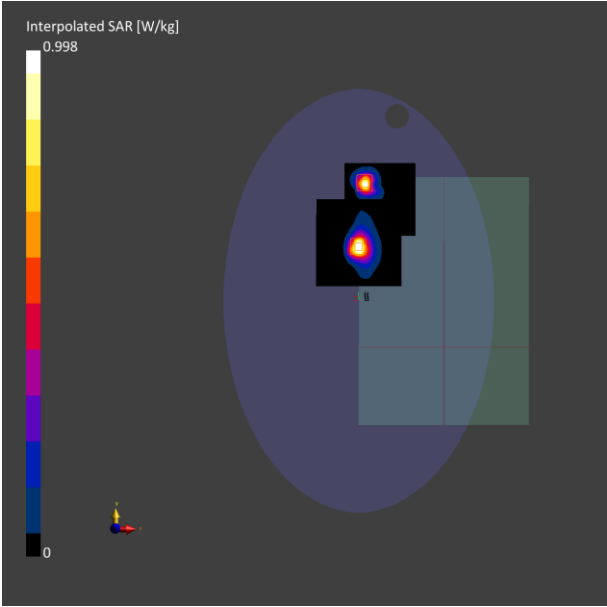

Case 2#	Band	Position	SAR (W/kg)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Plot No				X	Y	Z				
1	WLAN2.4G Ant.Aux+WLAN6G Ant.Aux	Bottom Side	1.370	0.000	0.074	-0.179	87.2	2.46	0.04	Not required
2	WLAN2.4G Ant.Main+WLAN6G Ant.Main		1.088	0.027	0.157	-0.176				

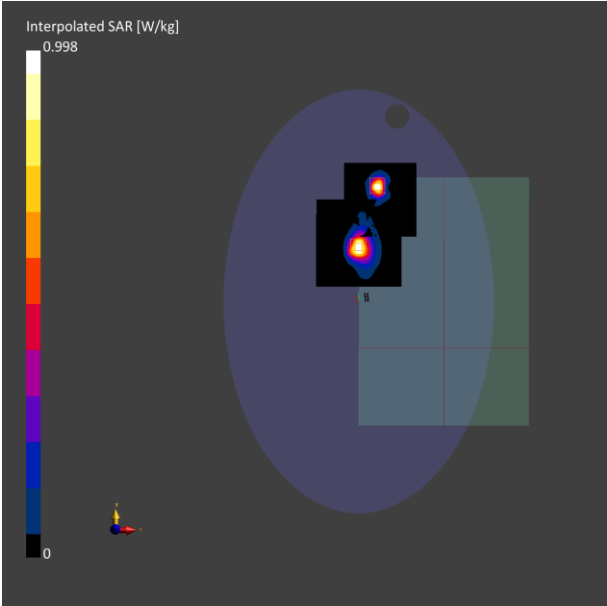

13 TEST EQUIPMENTS LIST

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
Test Software	Speag	DASY8	16.2.2.1588	N/A	N/A
2450MHz Validation Dipole	Speag	D2450V2	SN: 952	2024/05/07	2027/05/06
5GHz Validation Dipole	Speag	D5GHzV2	SN: 1200	2024/05/09	2027/05/08
6.5GHz Validation Dipole	Speag	D6.5GHzV2	SN: 1037	2024/05/28	2027/05/27
Data Acquisition Electronicsr	Speag	DAE4	SN: 1710	2024/01/03	2025/01/02
Data Acquisition Electronicsr	Speag	DAE4	SN: 1711	2024/03/18	2025/03/17
E-Field Probe	Speag	EX3DV4	SN: 7893	2024/09/05	2025/09/04
E-Field Probe	Speag	EX3DV4	SN: 7510	2024/06/25	2025/06/24
Signal Generator	R&S	SMB100A	177746	2024/04/24	2025/04/23
Power Meter	R&S	NRVD-B2	835843/014	2024/08/08	2025/08/07
Power Sensor	R&S	NRV-Z4	100381	2024/08/08	2025/08/07
Power Sensor	R&S	NRV-Z2	100211	2024/08/08	2025/08/07
Network Analyzer	Agilent	E5071C	MY46103472	2024/09/11	2025/09/10
Thermometer	Elitech	RC-4HC	EF7216002985	2024/10/31	2025/10/30
Thermometer	Elitech	RC-4HC	EF720B004811	2024/10/31	2025/10/30
Power Amplifier	Mini-Circuits	ZVA-183W-S+	932502132	N/A	N/A
Dielectric Probe Kit	Speag	DAK3.5	SN: 1312	N/A	N/A
Phantom	Speag	ELI V8.0	SN: 2159	N/A	N/A
Phantom	Speag	ELI V8.0	SN: 2162	N/A	N/A
Attenuator	COM-MW	ZA-S1-31	1305003187	N/A	N/A
Directional coupler	AA-MCS	AAMCS-UDC	000272	N/A	N/A

Note: For dipole antennas, BALUN has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss in within 20% of calibrated measurement.
4. Impedance (real or imaginary parts) in within 5 Ohms of calibrated measurement.

ANNEX A SIMULATING LIQUID VERIFICATION RESULT

The dielectric parameters of the liquids were verified prior to the SAR evaluation using a DAK3.5 Dielectric Probe Kit.

Date	Liquid Type	Fre. (MHz)	Temp. (°C)	Meas. Conductivity (σ) (S/m)	Meas. Permittivity (ϵ)	Target Conductivity (σ) (S/m)	Target Permittivity (ϵ)	Conductivity Tolerance (%)	Permittivity Tolerance (%)
2024.12.30	Head	2450	21.4	1.80	40.72	1.80	39.20	0.00	3.88
2024.12.31	Head	2450	21.4	1.88	40.64	1.80	39.20	4.44	3.67
2025.12.17	Head	2450	21.6	1.76	39.95	1.80	39.20	-2.22	1.91
2025.01.01	Head	5250	21.1	4.73	35.92	4.71	35.93	0.42	-0.03
2025.12.18	Head	5250	21.3	4.65	36.76	4.71	35.93	-1.27	2.31
2025.01.02	Head	5600	21.1	5.11	35.17	5.07	35.53	0.79	-1.01
2025.12.19	Head	5600	21.1	5.12	35.04	5.07	35.53	0.99	-1.38
2025.01.07	Head	5750	21.7	5.27	35.06	5.22	35.36	0.96	-0.85
2025.01.08	Head	5750	21.4	5.25	34.92	5.22	35.36	0.57	-1.24
2025.12.20	Head	5750	21.1	5.29	35.33	5.22	35.36	1.34	-0.08
2024.12.27	Head	6500	21.7	6.10	33.35	6.07	34.46	0.49	-3.22
2025.12.21	Head	6500	21.7	6.09	34.36	6.07	34.46	0.33	-0.29

Note: The tolerance limit of Conductivity and Permittivity is $\pm 5\%$.

ANNEX B SYSTEM CHECK RESULT

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 %.

Head liquid 1g

Date	Liquid Type	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)
2024.12.30	Head	2450	100	5.350	53.50	52.60	1.71
2024.12.31	Head	2450	100	5.210	52.10	52.60	-0.95
2025.12.17	Head	2450	100	5.280	52.80	52.60	0.38
2025.01.01	Head	5250	100	7.810	78.10	77.70	0.51
2025.12.18	Head	5250	100	7.610	76.10	77.70	-2.06
2025.01.02	Head	5600	100	7.820	78.20	81.30	-3.81
2025.12.19	Head	5600	100	7.690	76.90	81.30	-5.41
2025.01.07	Head	5750	100	7.920	79.20	77.60	2.06
2025.01.08	Head	5750	100	7.450	74.50	77.60	-3.99
2025.12.20	Head	5750	100	7.310	73.10	77.60	-5.80
2024.12.27	Head	6500	100	30.200	302.00	299.00	1.00
2025.12.21	Head	6500	100	28.100	281.00	299.00	-6.02

Note: The tolerance limit of System validation $\pm 10\%$.

Head liquid 10g

Date	Liquid Type	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)
2024.12.30	Head	2450	100	2.450	24.50	24.70	-0.81
2024.12.31	Head	2450	100	2.340	23.40	24.70	-5.26
2025.12.17	Head	2450	100	2.350	23.50	24.70	-4.86
2025.01.01	Head	5250	100	2.260	22.60	22.00	2.73
2025.12.18	Head	5250	100	2.150	21.50	22.00	-2.27
2025.01.02	Head	5600	100	2.400	24.00	23.10	3.90
2025.12.19	Head	5600	100	2.310	23.10	23.10	0.00
2025.01.07	Head	5750	100	2.230	22.30	21.90	1.83
2025.01.08	Head	5750	100	2.160	21.60	21.90	-1.37
2025.12.20	Head	5750	100	2.160	21.60	21.90	-1.37
2024.12.27	Head	6500	100	5.450	54.50	55.20	-1.27
2025.12.21	Head	6500	100	5.230	52.30	55.20	-5.25

Note: The tolerance limit of System validation $\pm 10\%$.

System Performance Check Data (2450MHz)


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL		Valida tion band	CW, 0--	2450.0, 2450	6.98	1.80	40.7	22.3	21.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000 2024-12-30	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1710, 2024-01-03

Scan Setup				Measurement Results		
		Area Scan	Zoom Scan			
Grid	Extents	80.0 x 80.0	30.0 x 30.0 x	Date	2024-12-30	2024-12-30
	[mm]		30.0	psSAR1g	5.15	5.35
Grid	Steps	8.0 x 10.0	5.0 x 5.0 x 1.5	[W/kg]		
	[mm]			psSAR10g	2.45	2.45
Sensor		3.0	1.4	[W/kg]		
Surface [mm]				Power Drift	0.03	0.03
Graded Grid		Yes	Yes	[dB]		
Grading Ratio		1.5	1.5	Power Scaling	Disabled	Disabled
MAIA		N/A	N/A	Scaling Factor		
Surface		All points	All points	[dB]		
Detection				TSL	No correction	No correction
Scan Method		Measured	Measured	Correction		
				M2/M1 [%]		79.5
				Dist 3dB Peak		9.3
				[mm]		

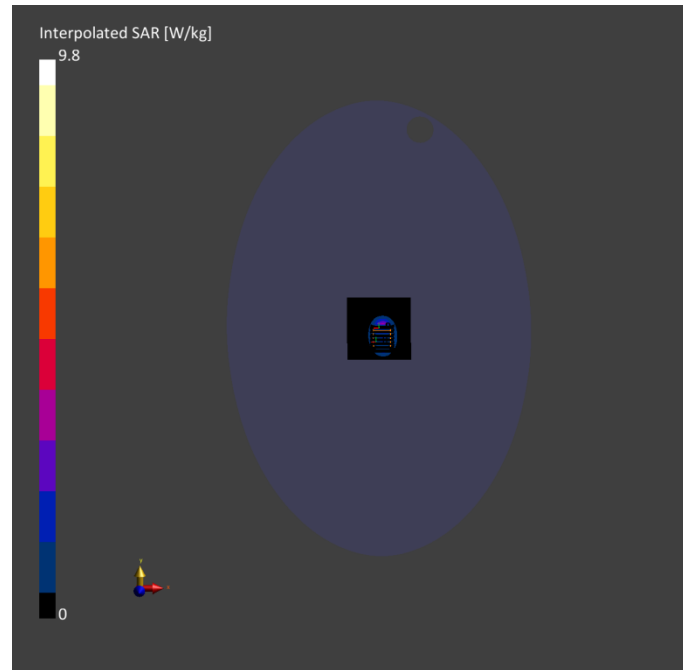

System Performance Check Data (2450MHz)


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL		Valida tion band	CW, 0--	2450.0, 2450	6.98	1.88	40.6	22.5	21.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000 2024-12-31	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1710, 2024-01-03

Scan Setup				Measurement Results		
		Area Scan	Zoom Scan			
Grid	Extents	80.0 x 80.0	30.0 x 30.0 x	Date	2024-12-31	2024-12-31
	[mm]		30.0	psSAR1g	5.19	5.21
Grid	Steps	8.0 x 10.0	5.0 x 5.0 x 1.5	[W/kg]		
	[mm]			psSAR10g	2.35	2.34
Sensor		3.0	1.4	[W/kg]		
Surface [mm]				Power Drift	0.12	0.02
Graded Grid		Yes	Yes	[dB]		
Grading Ratio		1.5	1.5	Power Scaling	Disabled	Disabled
MAIA		N/A	N/A	Scaling Factor		
Surface		All points	All points	[dB]		
Detection				TSL	No correction	No correction
Scan Method		Measured	Measured	Correction		
				M2/M1 [%]		80.2
				Dist 3dB Peak		9.6
				[mm]		

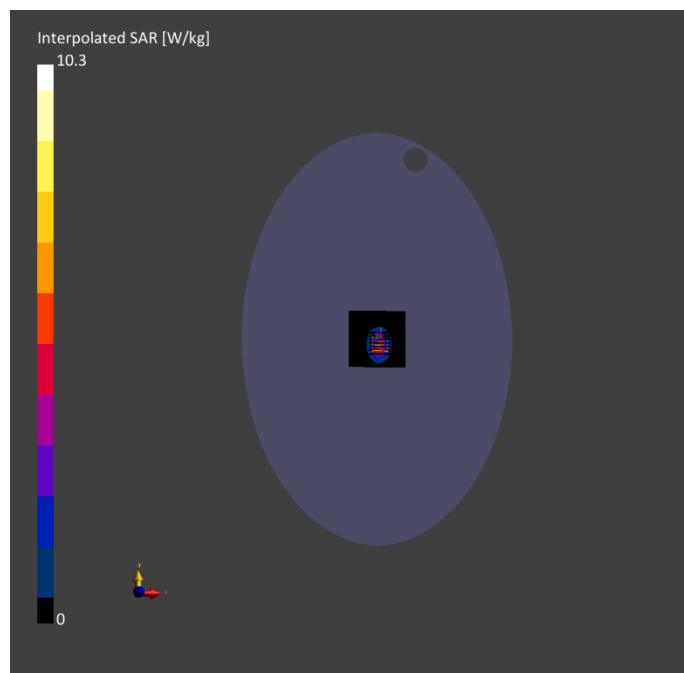

System Performance Check Data (2450MHz)


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL		Valida tion band	CW, 0--	2450.0, 2450	6.98	1.76	39.9	22.3	21.6

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000	2024-12-17	EX3DV4 - SN7893,	2024-09-05	DAE4 Sn1710,	2024-01-03

Scan Setup				Measurement Results		
		Area Scan	Zoom Scan			
Grid	Extents	80.0 x 80.0	30.0 x 30.0 x	Date	2024-12-17	2024-12-17
	[mm]		30.0	psSAR1g	5.19	5.28
Grid	Steps	8.0 x 10.0	5.0 x 5.0 x 1.5	[W/kg]		
	[mm]			psSAR10g	2.32	2.35
Sensor		3.0	1.4	[W/kg]		
Surface [mm]				Power Drift	0.11	0.04
Graded Grid		Yes	Yes	[dB]		
Grading Ratio		1.5	1.5	Power Scaling	Disabled	Disabled
MAIA		N/A	N/A	Scaling Factor		
Surface		All points	All points	[dB]		
Detection				TSL	No correction	No correction
Scan Method		Measured	Measured	Correction		
				M2/M1 [%]		80.1
				Dist 3dB Peak		9.5
				[mm]		

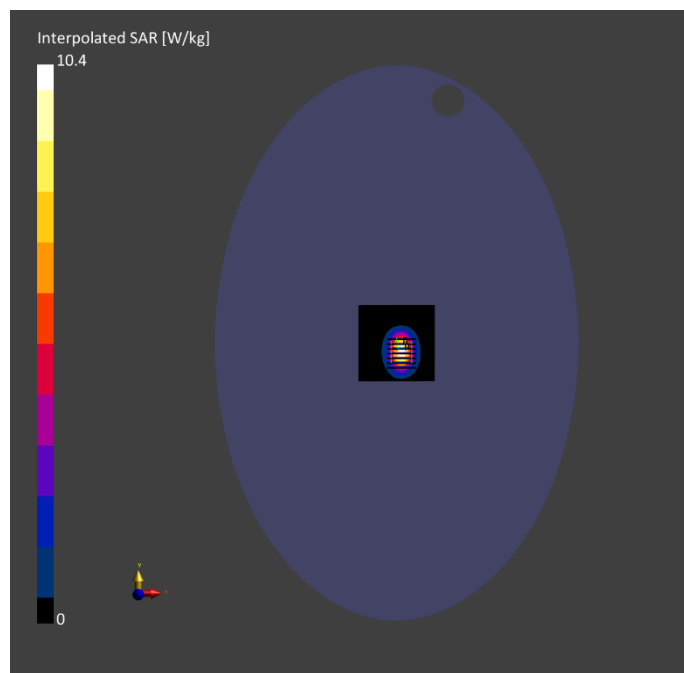

System Performance Check Data (5250MHz)


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL		Valida tion band	CW, 0--	5250.0, 5250	5.44	4.71	36.5	22.7	21.3

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000 2024-12-18	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1710, 2024-01-03

Scan Setup				Measurement Results		
		Area Scan	Zoom Scan			
Grid	Extents	80.0 x 80.0	22.0 x 22.0 x	Date	2024-12-18	2024-12-18
	[mm]		22.0	psSAR1g	7.12	7.61
Grid	Steps	10.0 x 10.0	4.0 x 4.0 x 1.4	[W/kg]		
	[mm]			psSAR10g	2.01	2.15
Sensor		3.0	1.4	[W/kg]		
Surface [mm]				Power Drift	0.02	-0.04
Graded Grid		Yes	Yes	[dB]		
Grading Ratio		1.5	1.4	Power Scaling	Disabled	Disabled
MAIA		N/A	N/A	Scaling Factor		
Surface		All points	All points	[dB]		
Detection				TSL	No correction	No correction
Scan Method		Measured	Measured	Correction		
				M2/M1 [%]		64.8
				Dist 3dB Peak		7.4
				[mm]		

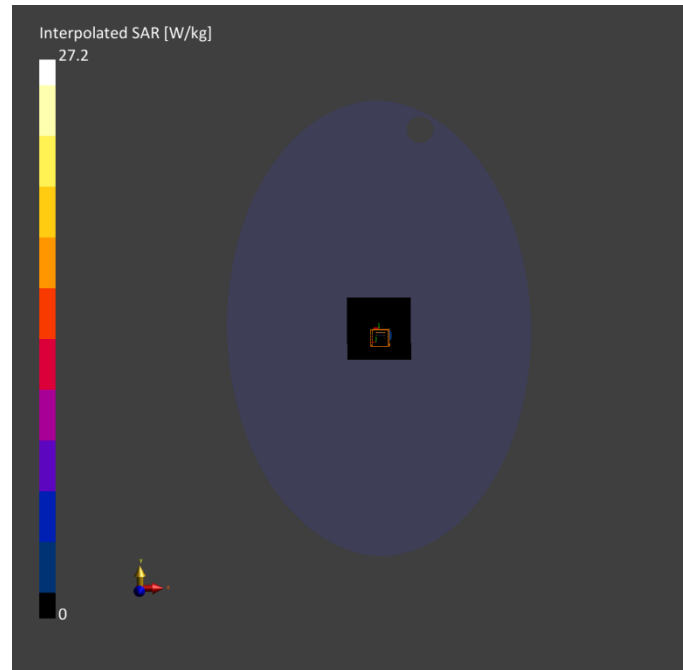

System Performance Check Data (5250MHz)


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL		Valida tion band	CW, 0--	5250.0, 5250	5.44	4.73	35.9	22.6	21.1

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000	2025-01-01	EX3DV4 - SN7893,	2024-09-05	DAE4 Sn1710,	2024-01-03

Scan Setup				Measurement Results		
		Area Scan	Zoom Scan			
Grid	Extents	80.0 x 80.0	22.0 x 22.0 x	Date	2025-01-01	2025-01-01
	[mm]		22.0	psSAR1g	7.79	7.81
Grid	Steps	10.0 x 10.0	4.0 x 4.0 x 1.4	[W/kg]		
	[mm]			psSAR10g	2.32	2.26
Sensor		3.0	1.4	[W/kg]		
Surface [mm]				Power Drift	-0.04	0.02
Graded Grid		Yes	Yes	[dB]		
Grading Ratio		1.5	1.4	Power Scaling	Disabled	Disabled
MAIA		N/A	N/A	Scaling Factor		
Surface		All points	All points	[dB]		
Detection				TSL	No correction	No correction
Scan Method		Measured	Measured	Correction		
				M2/M1 [%]		54.7
				Dist 3dB Peak		7.2
				[mm]		

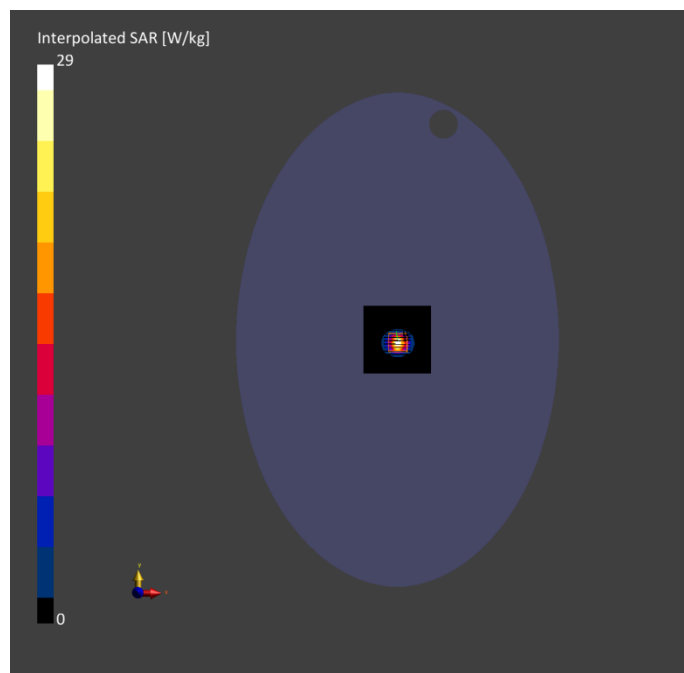

System Performance Check Data (5600MHz)


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL		Valida tion band	CW, 0--	5600.0, 5600	4.91	5.12	35.0	22.5	21.1

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-12-19	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1710, 2024-01-03

Scan Setup				Measurement Results		
		Area Scan	Zoom Scan			
Grid	Extents	80.0 x 80.0	22.0 x 22.0 x	Date	2025-12-19	2025-12-19
	[mm]		22.0	psSAR1g	7.41	7.69
Grid	Steps	10.0 x 10.0	4.0 x 4.0 x 1.4	[W/kg]		
	[mm]			psSAR10g	2.16	2.31
Sensor		3.0	1.4	[W/kg]		
Surface [mm]				Power Drift	-0.02	0.01
Graded Grid		Yes	Yes	[dB]		
Grading Ratio		1.5	1.4	Power Scaling	Disabled	Disabled
MAIA		N/A	N/A	Scaling Factor		
Surface		All points	All points	[dB]		
Detection				TSL	No correction	No correction
Scan Method		Measured	Measured	Correction		
				M2/M1 [%]		63.5
				Dist 3dB Peak		7.4
				[mm]		

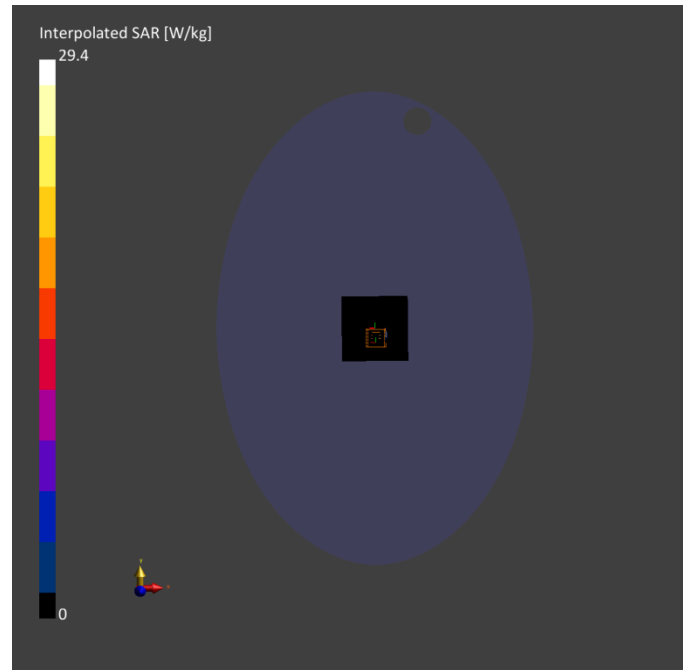

System Performance Check Data (5600MHz)


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL		Valida tion band	CW, 0--	5600.0, 5600	5.00	5.11	35.2	22.6	21.1

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000	2025-01-02	EX3DV4 - SN7510,	2024-06-25	DAE4 Sn1711,	2024-03-18

Scan Setup				Measurement Results		
		Area Scan	Zoom Scan			
Grid	Extents	80.0 x 80.0	22.0 x 22.0 x	Date	2025-01-02	2025-01-02
	[mm]		22.0	psSAR1g	7.61	7.82
Grid	Steps	10.0 x 10.0	4.0 x 4.0 x 1.4	[W/kg]		
	[mm]			psSAR10g	2.33	2.40
Sensor		3.0	1.4	[W/kg]		
Surface [mm]				Power Drift	-0.04	0.01
Graded Grid		Yes	Yes	[dB]		
Grading Ratio		1.5	1.4	Power Scaling	Disabled	Disabled
MAIA		N/A	N/A	Scaling Factor		
Surface		All points	All points	[dB]		
Detection				TSL	No correction	No correction
Scan Method		Measured	Measured	Correction		
				M2/M1 [%]		62.7
				Dist 3dB Peak		7.1
				[mm]		

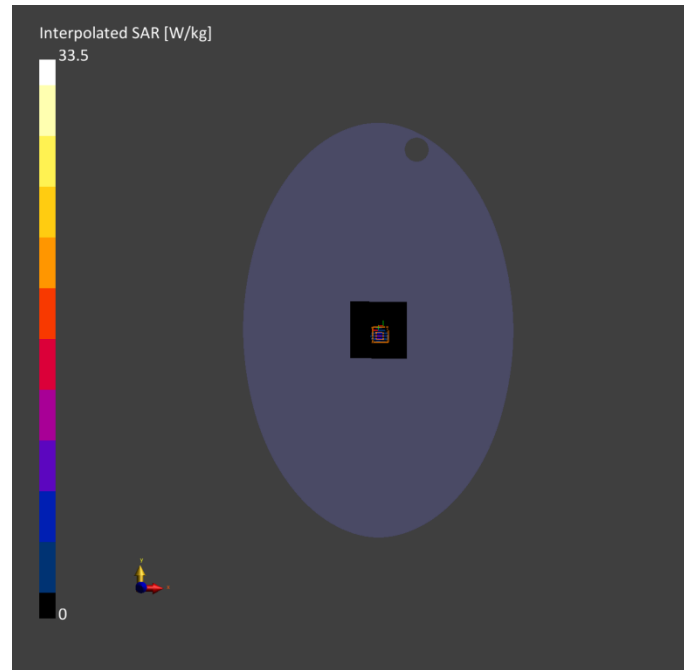

System Performance Check Data (5750MHz)


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL		Valida tion band	CW, 0--	5750.0, 5750	4.98	5.27	35.1	22.3	21.7

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000	2025-01-07	EX3DV4 - SN7893,	2024-09-05	DAE4 Sn1711,	2024-03-18

Scan Setup				Measurement Results		
		Area Scan	Zoom Scan			
Grid	Extents	80.0 x 80.0	22.0 x 22.0 x	Date	2025-01-07	2025-01-07
	[mm]		22.0	psSAR1g	6.88	7.92
Grid	Steps	10.0 x 10.0	4.0 x 4.0 x 1.4	[W/kg]		
	[mm]			psSAR10g	2.04	2.23
Sensor		3.0	1.4	[W/kg]		
Surface [mm]				Power Drift	-0.01	0.01
Graded Grid		Yes	Yes	[dB]		
Grading Ratio		1.5	1.4	Power Scaling	Disabled	Disabled
MAIA		N/A	N/A	Scaling Factor		
Surface		All points	All points	[dB]		
Detection				TSL	No correction	No correction
Scan Method		Measured	Measured	Correction		
				M2/M1 [%]		61.4
				Dist 3dB Peak		7.9
				[mm]		

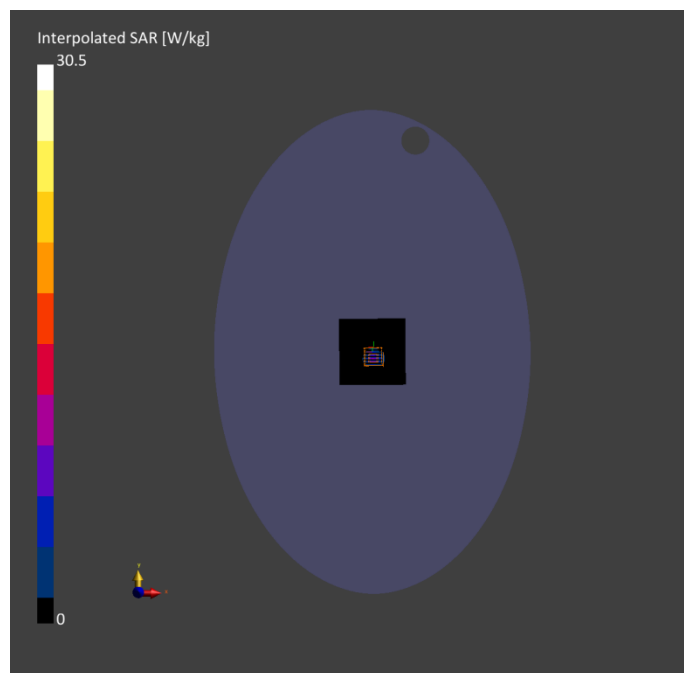

System Performance Check Data (5750MHz)


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL		Valida tion band	CW, 0--	5750.0, 5750	4.98	5.25	34.9	22.4	21.4

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000	2025-01-08	EX3DV4 - SN7893,	2024-09-05	DAE4 Sn1711,	2024-03-18

Scan Setup				Measurement Results		
		Area Scan	Zoom Scan			
Grid	Extents	80.0 x 80.0	22.0 x 22.0 x	Date	2025-01-08	2025-01-08
	[mm]		22.0	psSAR1g	7.52	7.45
Grid	Steps	10.0 x 10.0	4.0 x 4.0 x 1.4	[W/kg]		
	[mm]			psSAR10g	2.02	2.16
Sensor		3.0	1.4	[W/kg]		
Surface [mm]				Power Drift	-0.11	0.02
Graded Grid		Yes	Yes	[dB]		
Grading Ratio		1.5	1.4	Power Scaling	Disabled	Disabled
MAIA		N/A	N/A	Scaling Factor		
Surface		All points	All points	[dB]		
Detection				TSL	No correction	No correction
Scan Method		Measured	Measured	Correction		
				M2/M1 [%]		61.1
				Dist 3dB Peak		7.5
				[mm]		

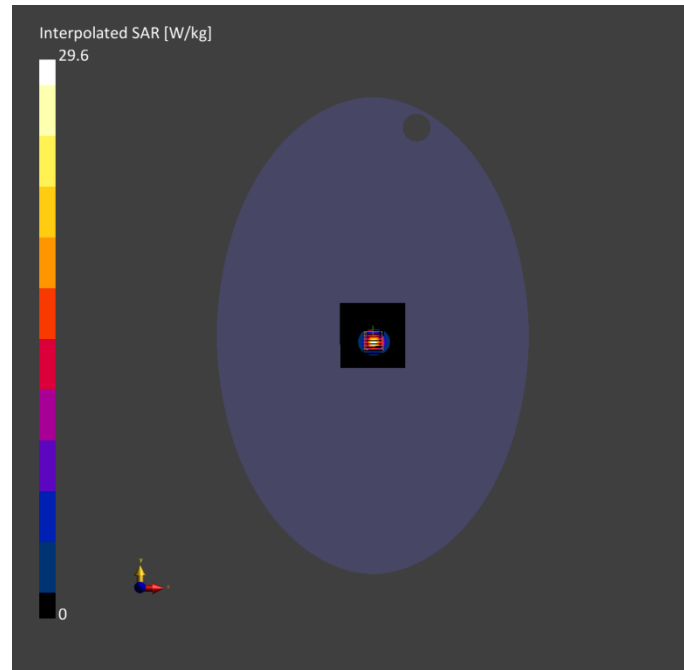

System Performance Check Data (5750MHz)


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL		Valida tion band	CW, 0--	5750.0, 5750	4.98	5.29	35.3	22.1	21.1

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2024-12-20	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1710, 2024-01-03

Scan Setup				Measurement Results		
		Area Scan	Zoom Scan			
Grid	Extents	80.0 x 80.0	22.0 x 22.0 x	Date	2024-12-20	2024-12-20
	[mm]		22.0	psSAR1g	7.51	7.31
Grid	Steps	10.0 x 10.0	4.0 x 4.0 x 1.4	[W/kg]		
	[mm]			psSAR10g	2.06	2.16
Sensor		3.0	1.4	[W/kg]		
Surface [mm]				Power Drift	-0.12	0.04
Graded Grid		Yes	Yes	[dB]		
Grading Ratio		1.5	1.4	Power Scaling	Disabled	Disabled
MAIA		N/A	N/A	Scaling Factor		
Surface		All points	All points	[dB]		
Detection				TSL	No correction	No correction
Scan Method		Measured	Measured	Correction		
				M2/M1 [%]		61.5
				Dist 3dB Peak		7.6
				[mm]		

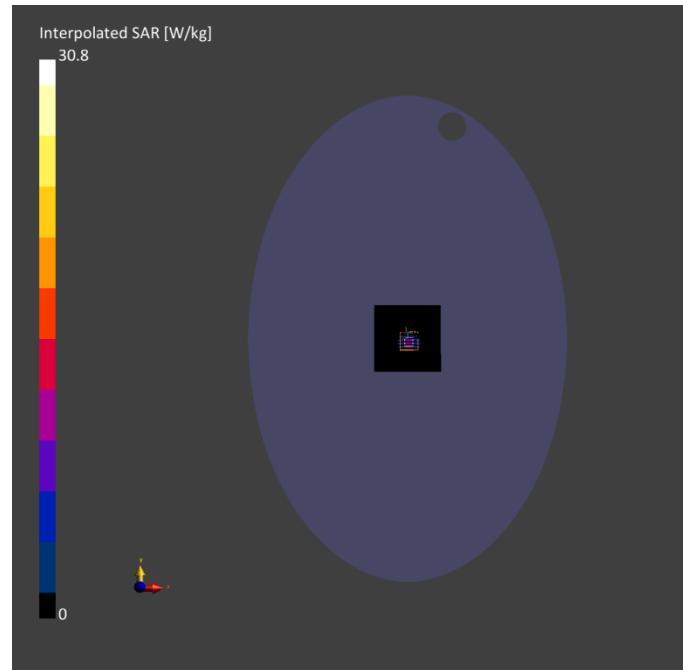

System Performance Check Data (6500MHz)


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL		Valida tion band	CW, 0--	6500.0, 6500	5.11	6.09	34.4	22.6	21.7

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000 2024-12-21	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1710, 2024-01-03

Scan Setup				Measurement Results		
		Area Scan	Zoom Scan			
Grid	Extents	85.0 x 85.0	22.0 x 22.0 x	Date	2024-12-21	2024-12-21
	[mm]		22.0	psSAR1g	27.6	28.1
Grid	Steps	8.5 x 8.5	3.4 x 3.4 x 1.4	[W/kg]		
	[mm]			psSAR10g	4.81	5.23
Sensor		3.0	1.4	[W/kg]		
Surface [mm]				APD4cm ²		125
Graded Grid		Yes	Yes	[W/m ²]		
Grading Ratio		1.5	1.4	Power Drift	0.02	0.02
MAIA		N/A	N/A	[dB]		
Surface		All points	All points	Power Scaling	Disabled	Disabled
Detection				Scaling Factor		
Scan Method		Measured	Measured	[dB]		
				TSL	No correction	No correction
				Correction		
				M2/M1 [%]		49.2
				Dist 3dB Peak		4.3
				[mm]		

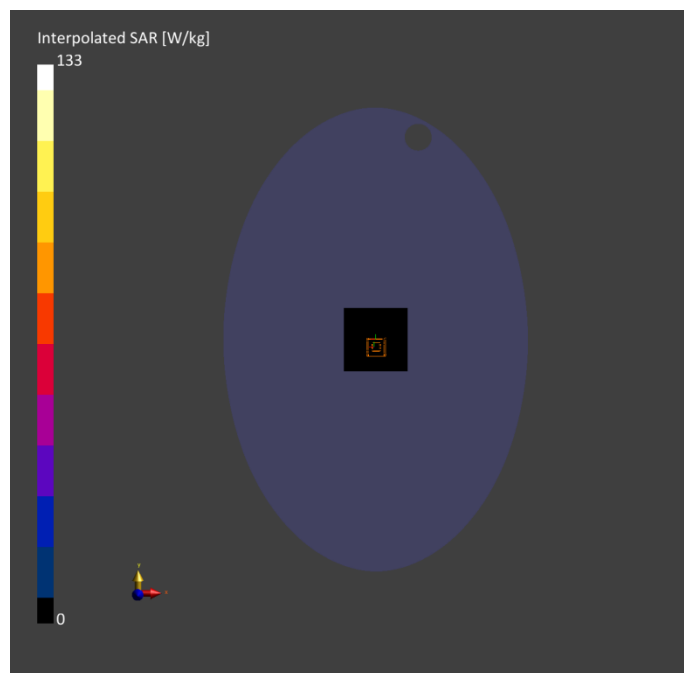

System Performance Check Data (6500MHz)


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL		Valida tion band	CW, 0--	6500.0, 6500	5.11	6.10	33.4	22.6	21.7

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000 2024-12-27	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1710, 2024-01-03

Scan Setup				Measurement Results		
		Area Scan	Zoom Scan			
Grid	Extents	85.0 x 85.0	22.0 x 22.0 x	Date	2024-12-27	2024-12-27
	[mm]		22.0	psSAR1g	29.6	30.2
Grid	Steps	8.5 x 8.5	3.4 x 3.4 x 1.4	[W/kg]		
	[mm]			psSAR10g	5.41	5.45
Sensor		3.0	1.4	[W/kg]		
Surface [mm]				APD4cm ²		136
Graded Grid		Yes	Yes	[W/m ²]		
Grading Ratio		1.5	1.4	Power Drift	-0.01	0.01
MAIA		N/A	N/A	[dB]		
Surface		All points	All points	Power Scaling	Disabled	Disabled
Detection				Scaling Factor		
Scan Method		Measured	Measured	[dB]		
				TSL	No correction	No correction
				Correction		
				M2/M1 [%]		50.8
				Dist 3dB Peak		5.2
				[mm]		

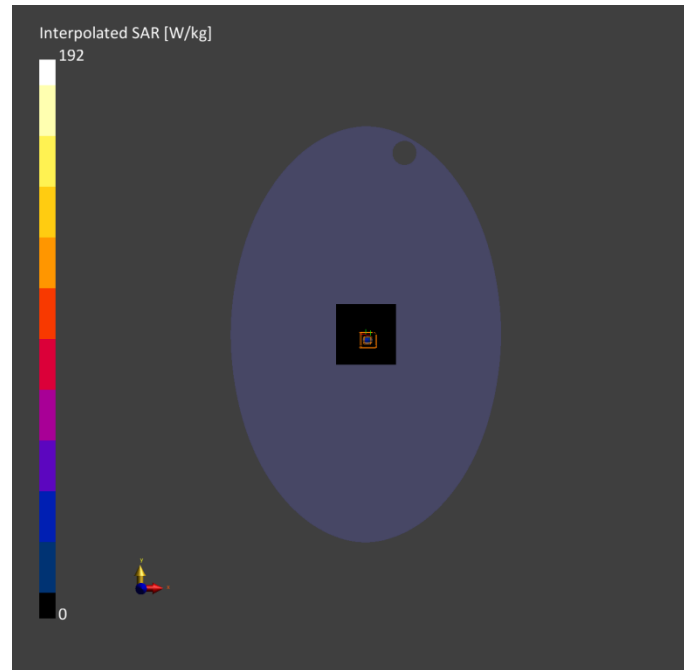

ANNEX C TEST DATA

Meas.1 Body Plane with Bottom Side 0mm on 0 Channel in Bluetooth mode with Antenna Auxiliary


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	EDGE BOTTOM , 0.00	ISM 2.4 GHz Band	Bluetooth, 10032- CAA	2402.0, 0	6.98	1.84	40.7	22.5	21.4

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000	2024-12-31	EX3DV4 - SN7893,	2024-09-05	DAE4 Sn1710,	2024-01-03

Scan Setup				Measurement Results		
		Area Scan	Zoom Scan			
Grid	Extents	120.0 x 120.0	30.0 x 30.0 x	Date	2024-12-31	2024-12-31
	[mm]		30.0	psSAR1g	0.157	0.171
Grid	Steps	12.0 x 12.0	5.0 x 5.0 x 5.0	[W/kg]		
	[mm]			psSAR10g	0.076	0.079
Sensor		3.0	1.4	[W/kg]		
Surface [mm]				Power Drift	-0.07	-0.18
Graded Grid		Yes	Yes	[dB]		
Grading Ratio		1.5	1.5	Power Scaling	Disabled	Disabled
MAIA		Y	N/A	Scaling Factor		
Surface		VMS + 6p	VMS + 6p	[dB]		
Detection				TSL	No correction	No correction
Scan Method		Measured	Measured	Correction		
				M2/M1 [%]		46.5
				Dist 3dB Peak		9.8
				[mm]		

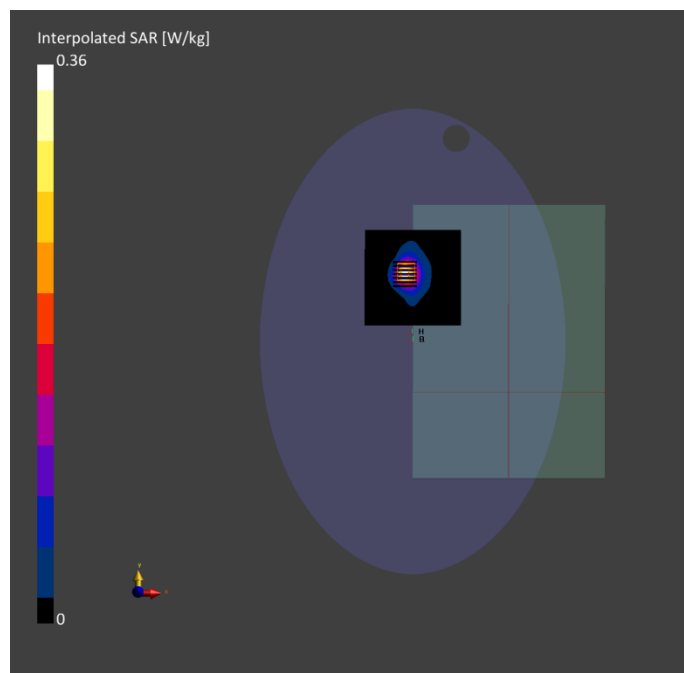

Meas.2 Body Plane with Bottom Side 0mm on 1 Channel in IEEE802.11b mode with Antenna Auxiliary


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	EDGE BOTTOM , 0.00	WLA N 2.4G Hz	WLAN, 10012- CAB	2412.0, 1	6.98	1.77	40.8	22.3	21.4

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000	2024-12-30	EX3DV4 - SN7893,	2024-09-05	DAE4 Sn1710,	2024-01-03

Scan Setup				Measurement Results		
		Area Scan	Zoom Scan			
Grid	Extents	120.0 x 120.0	30.0 x 30.0 x	Date	2024-12-30	2024-12-30
	[mm]		30.0	psSAR1g	0.806	0.893
Grid	Steps	12.0 x 12.0	5.0 x 5.0 x 5.0	[W/kg]		
	[mm]			psSAR10g	0.394	0.422
Sensor		3.0	1.4	[W/kg]		
Surface [mm]				Power Drift	-0.06	-0.01
Graded Grid		Yes	Yes	[dB]		
Grading Ratio		1.5	1.5	Power Scaling	Disabled	Disabled
MAIA		N/A	N/A	Scaling Factor		
Surface		VMS + 6p	All points	[dB]		
Detection				TSL	No correction	No correction
Scan Method		Measured	Measured	Correction		
				M2/M1 [%]		51.0
				Dist 3dB Peak		9.8
				[mm]		

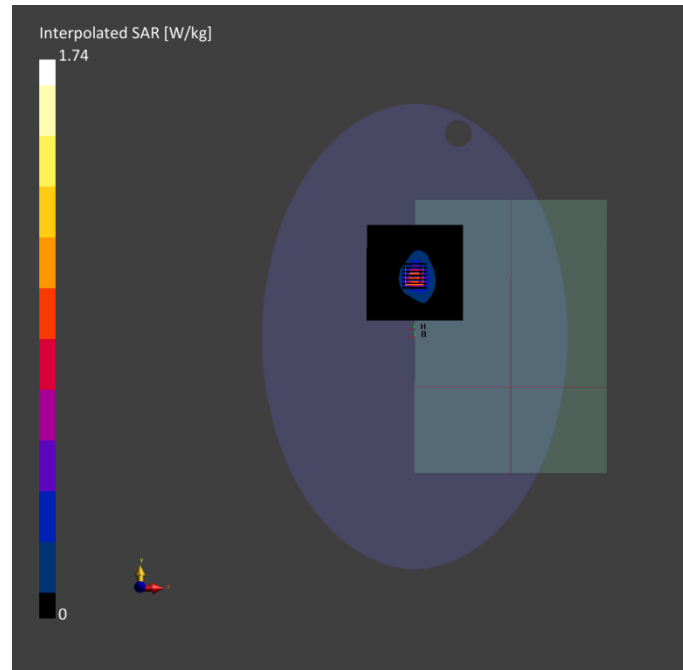

Meas.3 Body Plane with Bottom Side 0mm on 1 Channel in IEEE802.11b mode with Antenna Main
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	EDGE BOTTOM , 0.00	WLA N 2.4G Hz	WLAN, 10012- CAB	2412.0, 1	6.98	1.77	40.8	22.3	21.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000 2024-12-30	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1710, 2024-01-03

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-12-30	2024-12-30
psSAR1g [W/kg]	0.396	0.453
psSAR10g [W/kg]	0.194	0.203
Power Drift [dB]	-0.13	0.04
Power Scaling	Disabled	Disabled
Scaling Factor		
[dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		48.4
Dist 3dB Peak [mm]		8.6

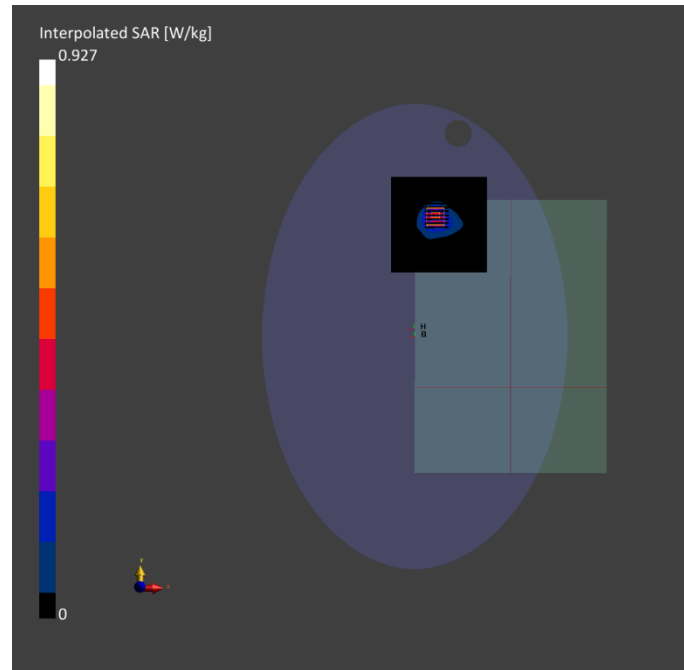

Meas.4 Body Plane with Front Edge 0mm on 58 Channel in IEEE802.11ac80 mode with Antenna Auxiliary
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE FRONT, 0.00	WLA N 5GHz	WLAN, 10544-AAC	5290.0, 58	5.44	4.79	35.9	22.6	21.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000 01 2025-01-	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1710, 2024-01-03

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-01	2025-01-01
psSAR1g [W/kg]	0.959	1.13
psSAR10g [W/kg]	0.275	0.316
Power Drift [dB]	-0.08	-0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		55.9
Dist 3dB Peak [mm]		6.8

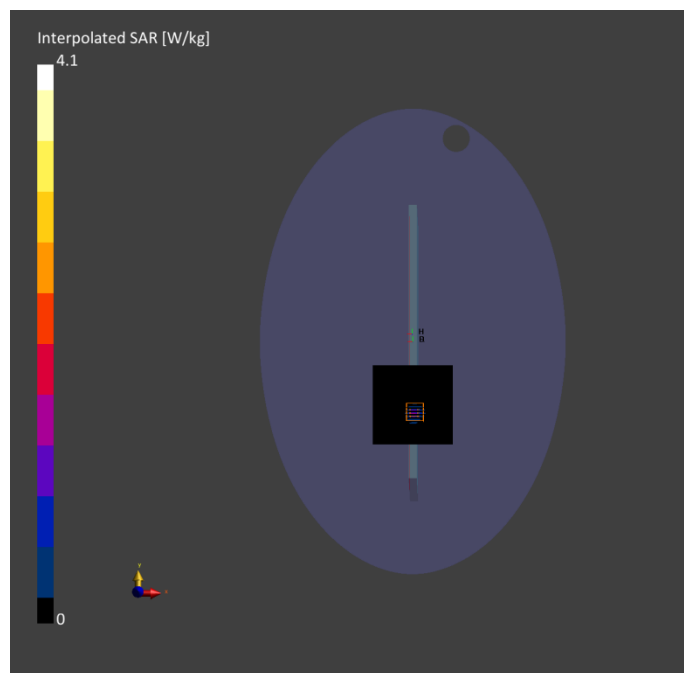

Meas.5 Body Plane with Bottom Side 0mm on 58 Channel in IEEE802.11ac80 mode with Antenna Main


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	EDGE BOTTOM , 0.00	WLA N 5GHz	WLAN, 10544- AAC	5290.0, 58	5.44	4.79	35.9	22.6	21.1

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000 01	2025-01-	EX3DV4 - SN7893, 2024-09- 05		DAE4 Sn1710, 2024-01- 03	

Scan Setup				Measurement Results		
		Area Scan	Zoom Scan			
Grid	Extents	100.0 x 100.0	24.0 x 24.0 x	Date	2025-01-01	2025-01-01
	[mm]		22.0	psSAR1g	0.269	0.291
Grid	Steps	10.0 x 10.0	4.0 x 4.0 x 2.0	[W/kg]		
	[mm]			psSAR10g	0.094	0.095
Sensor		3.0	1.4	[W/kg]		
Surface [mm]				Power Drift	-0.12	-0.02
Graded Grid		Yes	Yes	[dB]		
Grading Ratio		1.5	1.4	Power Scaling	Disabled	Disabled
MAIA		Y	Y	Scaling Factor		
Surface		VMS + 6p	VMS + 6p	[dB]		
Detection				TSL	No correction	No correction
Scan Method		Measured	Measured	Correction		
				M2/M1 [%]		58.0
				Dist 3dB Peak		7.4
				[mm]		

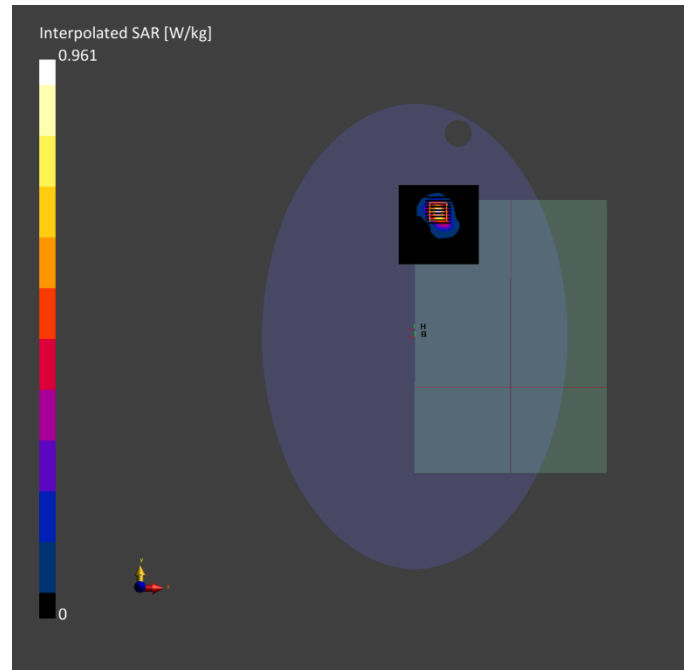

Meas.6 Body Plane with Front Edge 0mm on 106 Channel in IEEE802.11ac80 mode with Antenna Auxiliary
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE FRONT, 0.00	WLAN, N	WLAN, 10544-AAC	5530.0, 106	5.11	5.01	35.4	22.6	21.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 02 2025-01-	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-02	2025-01-02
psSAR1g [W/kg]	0.873	1.03
psSAR10g [W/kg]	0.244	0.279
Power Drift [dB]	-0.06	-0.11
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		53.9
Dist 3dB Peak [mm]		7.2

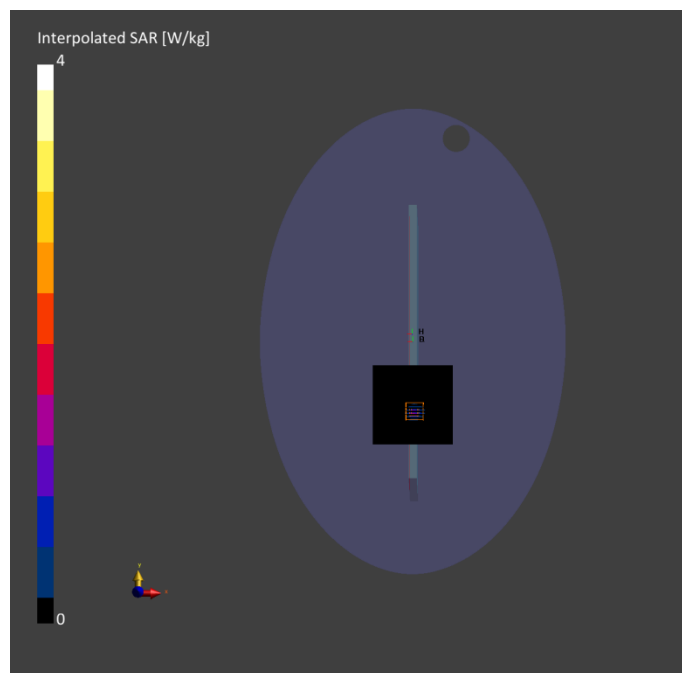

Meas.7 Body Plane with Bottom Side 0mm on 138 Channel in IEEE802.11ac80 mode with Antenna Main
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	EDGE BOTTOM , 0.00	WLA N 5GHz	WLAN, 10544- AAC	5690.0, 138	5.00	5.22	34.8	22.6	21.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-01-02	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-02	2025-01-02
psSAR1g [W/kg]	0.248	0.292
psSAR10g [W/kg]	0.084	0.088
Power Drift [dB]	0.05	-0.08
Power Scaling Scaling Factor	Disabled	Disabled
[dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		47.9
Dist 3dB Peak [mm]		7.5

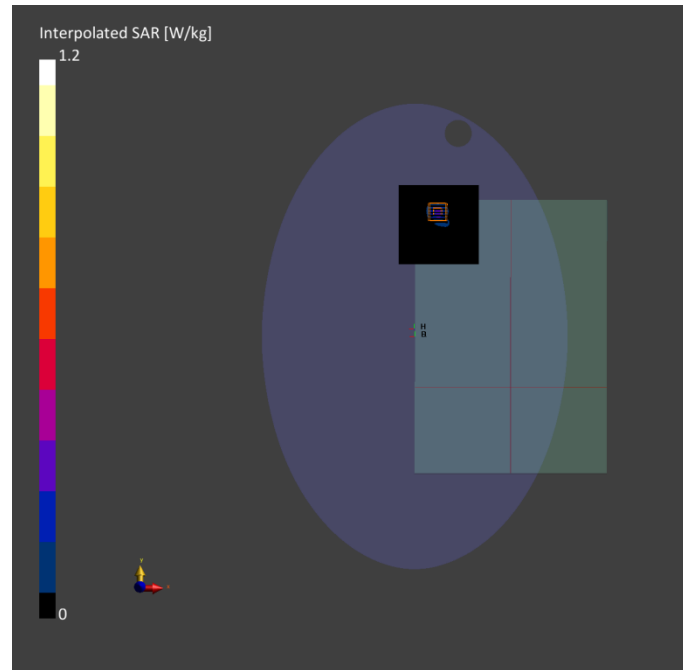

Meas.8 Body Plane with Front Edge 0mm on 155 Channel in IEEE802.11ac80 mode with Antenna Auxiliary
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE FRONT, 0.00	WLAN, N	WLAN, 10544-AAC	5775.0, 155	4.98	5.30	35.0	22.3	21.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 07 2025-01-	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-07	2025-01-07
psSAR1g [W/kg]	0.893	1.05
psSAR10g [W/kg]	0.252	0.286
Power Drift [dB]	-0.01	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		50.9
Dist 3dB Peak [mm]		7.2

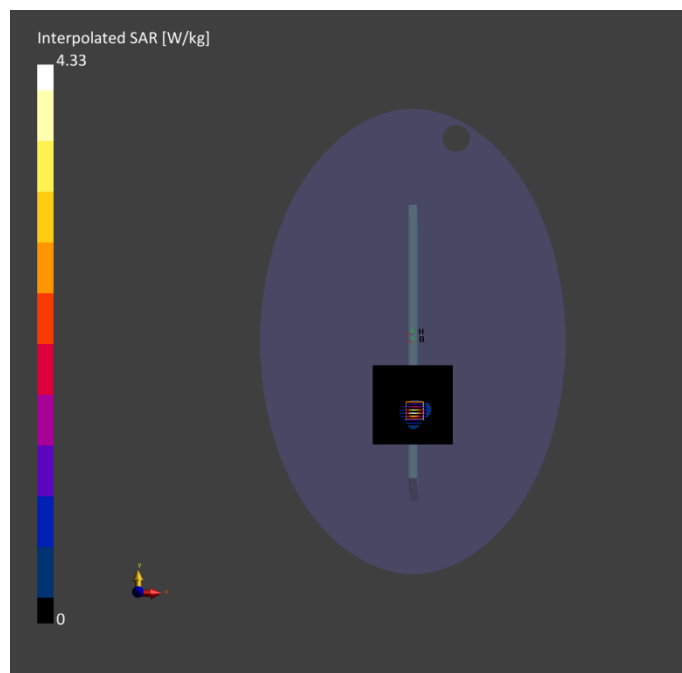

Meas.9 Body Plane with Bottom Side 0mm on 155 Channel in IEEE802.11ac80 mode with Antenna Main
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	EDGE BOTTOM , 0.00	WLA N 5GHz	WLAN, 10544- AAC	5775.0, 155	4.98	5.30	35.0	22.3	21.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-01-07	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-07	2025-01-07
psSAR1g [W/kg]	0.242	0.287
psSAR10g [W/kg]	0.081	0.084
Power Drift [dB]	-0.05	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction [dB]	No correction	No correction
M2/M1 [%]		46.8
Dist 3dB Peak [mm]		7.5

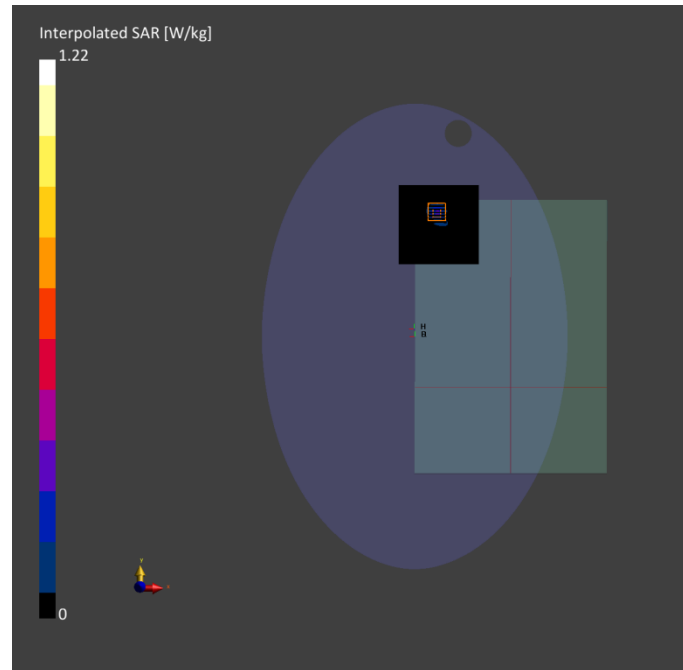

Meas.10 Body Plane with Front Edge 0mm on 171 Channel in IEEE802.11ac80 mode with Antenna Auxiliary
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE FRONT, 0.00	Custo m Band	CW, 10544-AAD	5855.0, 5855000	4.98	5.40	34.8	22.3	21.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 07 2025-01-	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-07	2025-01-07
psSAR1g [W/kg]	0.402	0.531
psSAR10g [W/kg]	0.121	0.139
Power Drift [dB]	0.11	-0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		43.7
Dist 3dB Peak [mm]		6.8

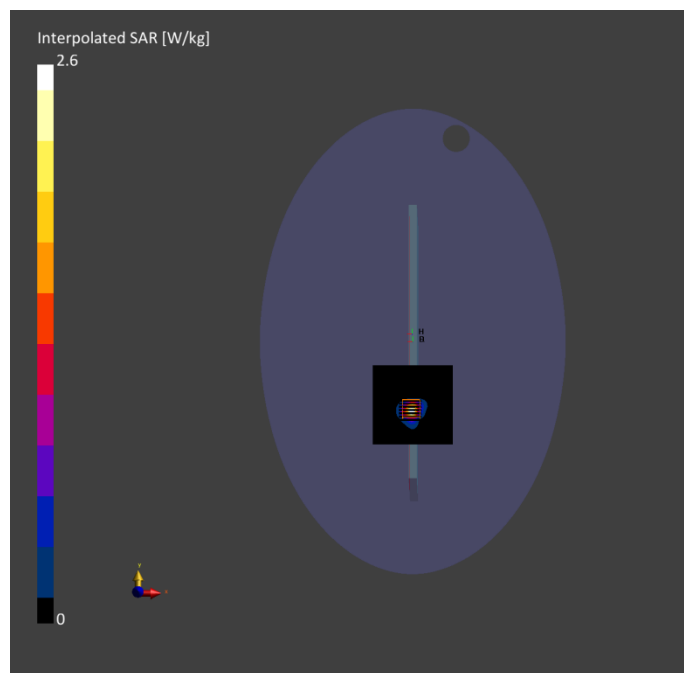

Meas.11 Body Plane with Bottom Side 0mm on 171 Channel in IEEE802.11ac80 mode with Antenna Main
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	EDGE BOTTOM , 0.00	Custo m Band	CW, 10544- AAD	5855.0, 5855000	4.98	5.40	34.8	22.3	21.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-01-07	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-07	2025-01-07
psSAR1g [W/kg]	0.202	0.339
psSAR10g [W/kg]	0.067	0.112
Power Drift [dB]	-0.17	0.08
Power Scaling	Disabled	Disabled
Scaling Factor		
[dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		40.6
Dist 3dB Peak [mm]		7.9

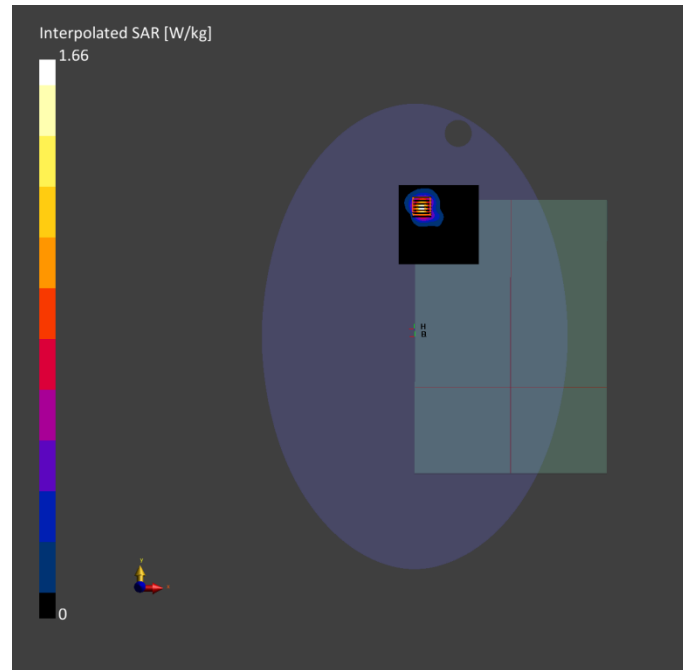

Meas.12 Body Plane with Front Edge 0mm on 47 Channel in IEEE802.11ax160 mode with Antenna Auxiliary
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	EDGE FRONT, 0.00	U-NII- 5	WLAN, 10743- AAC	6185.0, 47	5.11	5.78	33.7	22.6	21.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000 2024-12- 27	EX3DV4 - SN7893, 2024-09- 05	DAE4 Sn1710, 2024-01- 03

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 102.0	27.2 x 27.2 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-12-27	2024-12-27
psSAR1g [W/kg]	0.554	0.616
psSAR10g [W/kg]	0.162	0.173
APD4cm ² [W/m ²]		4.02
Power Drift [dB]	0.08	-0.19
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		56.9
Dist 3dB Peak [mm]		6.5

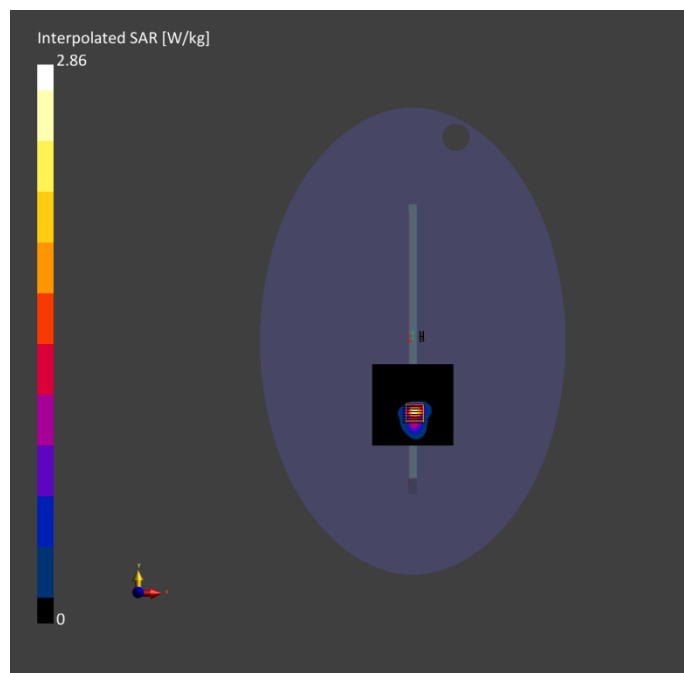

Meas.13 Body Plane with Bottom Side 0mm on 175 Channel in IEEE802.11ax160 mode with Antenna Main


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	EDGE BOTTOM , 0.00	U-NII- 7	WLAN, 10744- AAC	6825.0, 175	5.11	6.42	32.7	22.6	21.7

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000	2024-12- 27	EX3DV4 - SN7893,	2024-09- 05	DAE4 Sn1710,	2024-01- 03

Scan Setup				Measurement Results		
		Area Scan	Zoom Scan			
Grid	Extents	102.0 x 102.0	27.2 x 27.2 x	Date	2024-12-27	2024-12-27
	[mm]		22.0	psSAR1g	0.543	0.607
Grid	Steps	8.5 x 8.5	3.4 x 3.4 x 1.4	[W/kg]		
	[mm]			psSAR10g	0.165	0.175
Sensor		3.0	1.4	[W/kg]		
Surface [mm]				APD4cm ²		4.06
Graded Grid		Yes	Yes	[W/m ²]		
Grading Ratio		1.5	1.4	Power Drift	-0.03	-0.03
MAIA		Y	N/A	[dB]		
Surface		VMS + 6p	VMS + 6p	Power Scaling	Disabled	Disabled
Detection				Scaling Factor		
Scan Method		Measured	Measured	[dB]		
				TSL	No correction	No correction
				Correction		
				M2/M1 [%]		51.7
				Dist 3dB Peak		6.8
				[mm]		

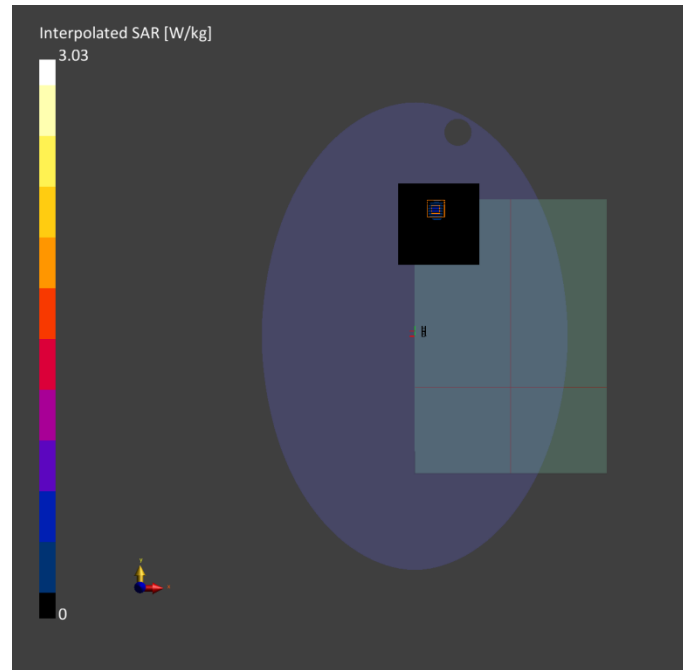

Meas.14 Limbs Plane with Keyboard Side 0mm on 0 Channel in Bluetooth mode with Antenna Auxiliary
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	BACK, 0.00	ISM 2.4 GHz Band	Bluetooth, 10032- CAA	2402.0, 0	6.98	1.84	40.7	22.5	21.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000 31 2024-12-	EX3DV4 - SN7893, 2024-09- 05	DAE4 Sn1710, 2024-01- 03

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-12-31	2024-12-31
psSAR1g [W/kg]	0.217	0.228
psSAR10g [W/kg]	0.100	0.105
Power Drift [dB]	0.00	0.03
Power Scaling Scaling Factor	Disabled	Disabled
[dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		53.5
Dist 3dB Peak [mm]		10.0

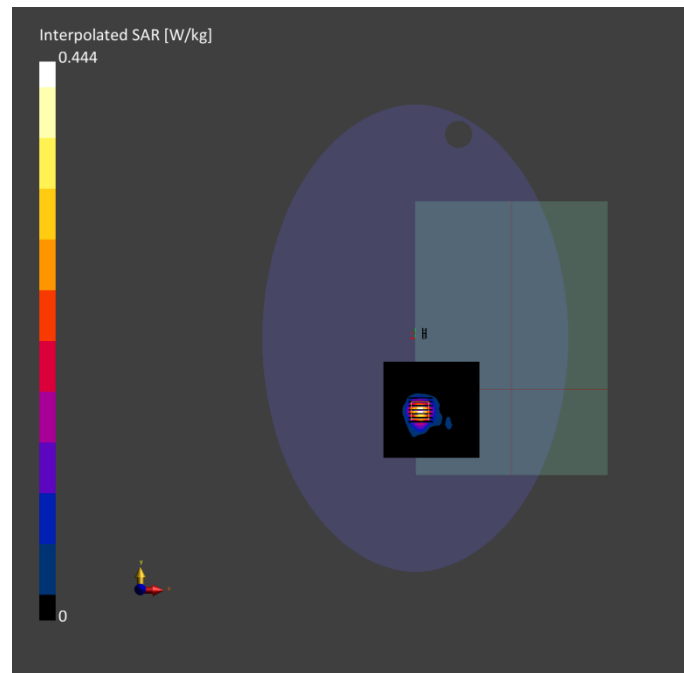

Meas.15 Limbs Plane with Keyboard Side 0mm on 1 Channel in IEEE802.11b mode with Antenna Auxiliary
Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	BACK, 0.00	WLA N 2.4G Hz	WLAN, 10012- CAB	2412.0, 1	6.98	1.77	40.8	22.3	21.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000 2024-12-30	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1710, 2024-01-03

Scan Setup
Measurement Results

		Area Scan	Zoom Scan			Area Scan	Zoom Scan
Grid	Extents	120.0 x 120.0	30.0 x 30.0 x 30.0	Date		2024-12-30	2024-12-30
				psSAR1g		1.03	1.08
Grid	Steps	12.0 x 12.0	5.0 x 5.0 x 5.0	[W/kg]			
				psSAR10g		0.476	0.502
Sensor		3.0	1.4	[W/kg]			
Surface [mm]				Power Drift		0.00	0.00
Graded Grid		Yes	Yes	[dB]			
Grading Ratio		1.5	1.5	Power Scaling		Disabled	Disabled
MAIA		N/A	N/A	Scaling Factor			
Surface		VMS + 6p	VMS + 6p	[dB]			
Detection				TSL		No correction	No correction
Scan Method		Measured	Measured	Correction			
				M2/M1 [%]			53.3
				Dist 3dB Peak			10.0
				[mm]			

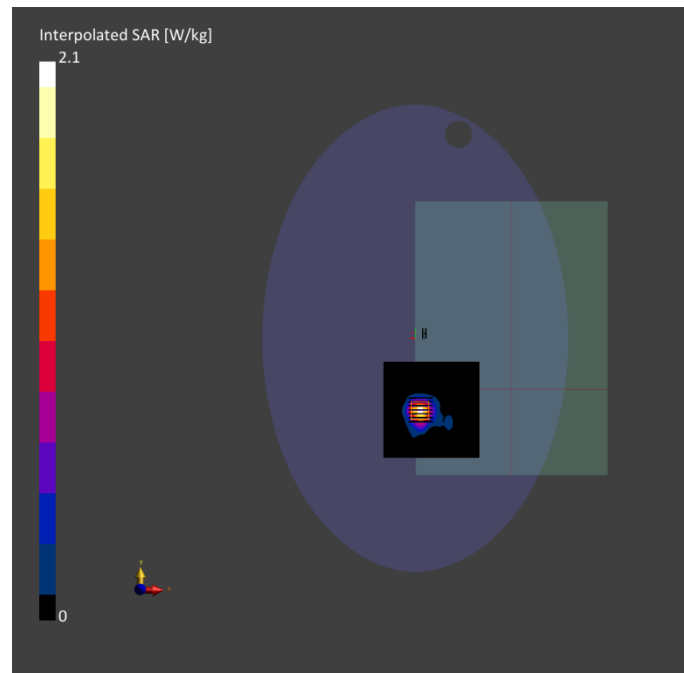

Meas.16 Limbs Plane with Keyboard Side 0mm on 1 Channel in IEEE802.11b mode with Antenna Main
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	BACK, 0.00	WLA N 2.4G Hz	WLAN, 10012- CAB	2412.0, 1	6.98	1.77	40.8	22.3	21.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000 2024-12-30	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1710, 2024-01-03

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-12-30	2024-12-30
psSAR1g [W/kg]	1.32	1.49
psSAR10g [W/kg]	0.638	0.627
Power Drift [dB]	-0.03	-0.05
Power Scaling Scaling Factor	Disabled	Disabled
[dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		45.6
Dist 3dB Peak [mm]		7.6

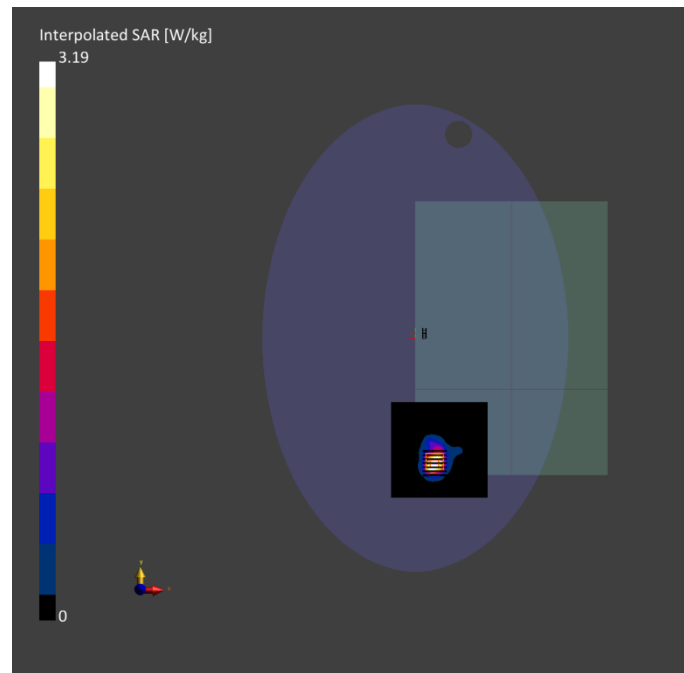

Meas.17 Limbs Plane with Keyboard Side 0mm on 58 Channel in IEEE802.11ac80 mode with Antenna Auxiliary
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	BACK, 0.00	WLA N 5GHz	WLAN, 10544- AAC	5290.0, 58	5.44	4.79	35.9	22.6	21.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000 2025-01-01	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1710, 2024-01-03

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-01	2025-01-01
psSAR1g [W/kg]	0.933	1.04
psSAR10g [W/kg]	0.293	0.316
Power Drift [dB]	0.03	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		54.6
Dist 3dB Peak [mm]		7.2

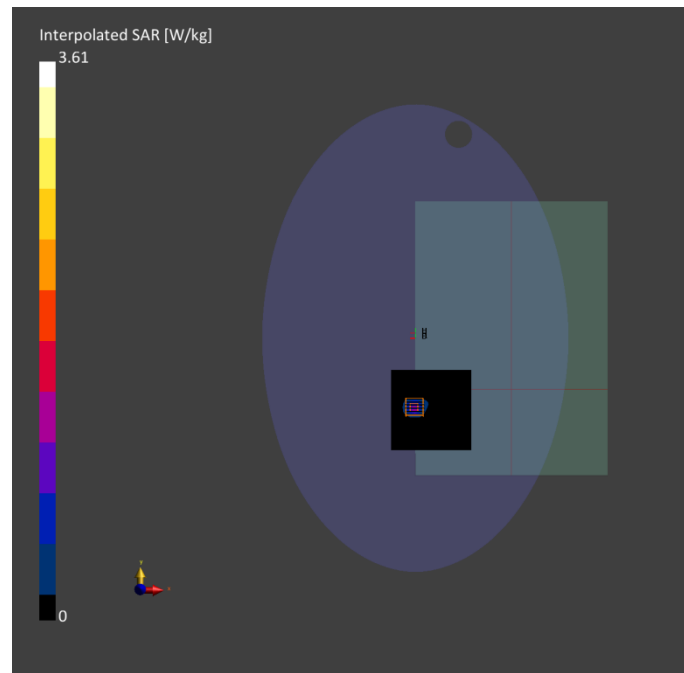

Meas.18 Limbs Plane with Keyboard Side 0mm on 58 Channel in IEEE802.11ac80 mode with Antenna Main
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	BACK, 0.00	WLA N 5GHz	WLAN, 10544- AAC	5290.0, 58	5.44	4.79	35.9	22.6	21.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000 2025-01-01	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1710, 2024-01-03

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-01	2025-01-01
psSAR1g [W/kg]	0.936	0.935
psSAR10g [W/kg]	0.310	0.308
Power Drift [dB]	0.03	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		57.7
Dist 3dB Peak [mm]		6.4

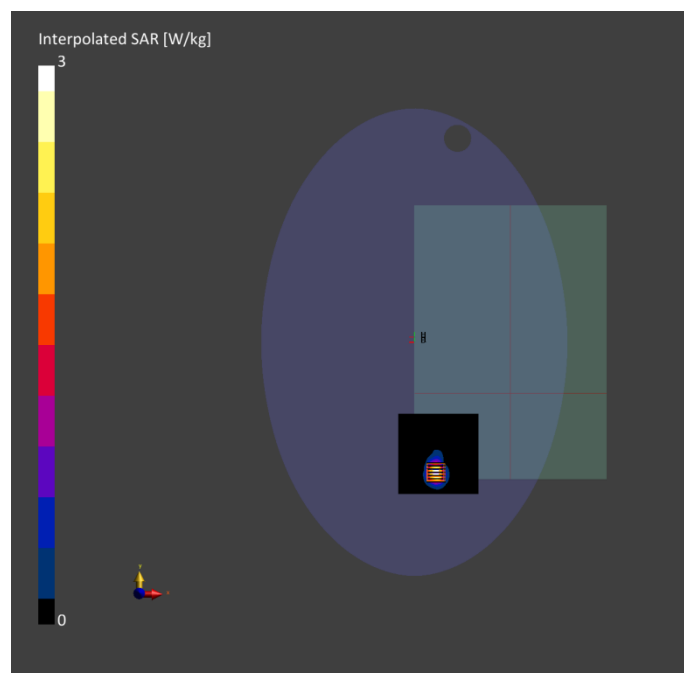

Meas.19 Limbs Plane with Keyboard Side 0mm on 106 Channel in IEEE802.11ac80 mode with Antenna Auxiliary
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	BACK, 0.00	WLA N 5GHz	WLAN, 10544- AAC	5530.0, 106	5.11	5.01	35.4	22.6	21.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-01-02	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-02	2025-01-02
psSAR1g [W/kg]	0.841	0.917
psSAR10g [W/kg]	0.259	0.284
Power Drift [dB]	0.07	0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		52.1
Dist 3dB Peak [mm]		7.2

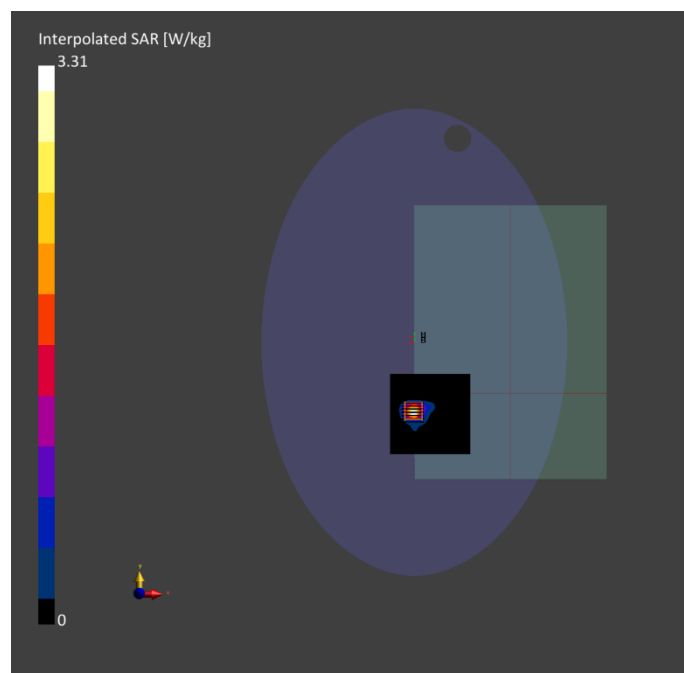

Meas.20 Limbs Plane with Keyboard Side 0mm on 106 Channel in IEEE802.11ac80 mode with Antenna Main
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	BACK, 0.00	WLA N 5GHz	WLAN, 10544- AAC	5530.0, 106	5.11	5.01	35.4	22.6	21.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-01-02	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-02	2025-01-02
psSAR1g [W/kg]	0.789	0.874
psSAR10g [W/kg]	0.264	0.279
Power Drift [dB]	0.05	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		55.1
Dist 3dB Peak [mm]		6.4

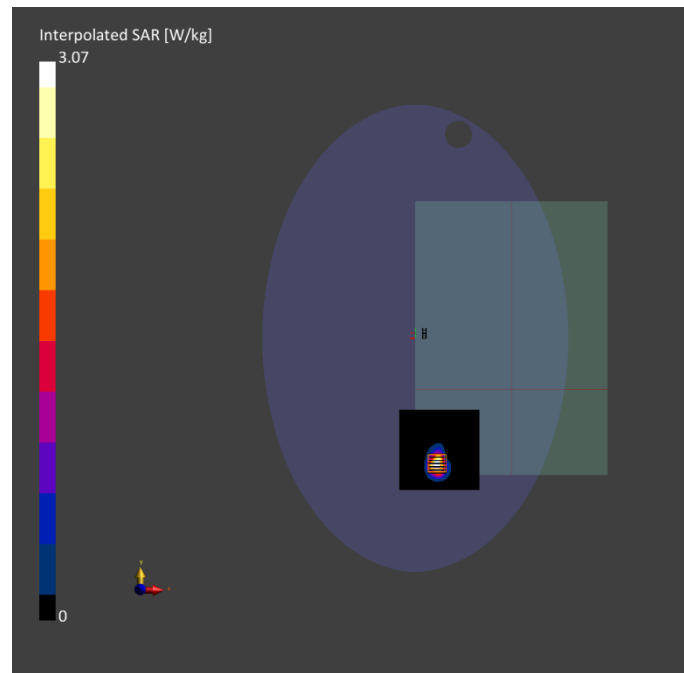

Meas.21 Limbs Plane with Keyboard Side 0mm on 155 Channel in IEEE802.11ac80 mode with Antenna Auxiliary
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	BACK, 0.00	WLA N 5GHz	WLAN, 10544- AAC	5775.0, 155	4.98	5.30	35.0	22.3	21.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-01-07	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-07	2025-01-07
psSAR1g [W/kg]	1.04	1.08
psSAR10g [W/kg]	0.324	0.339
Power Drift [dB]	0.03	0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		51.5
Dist 3dB Peak [mm]		6.2

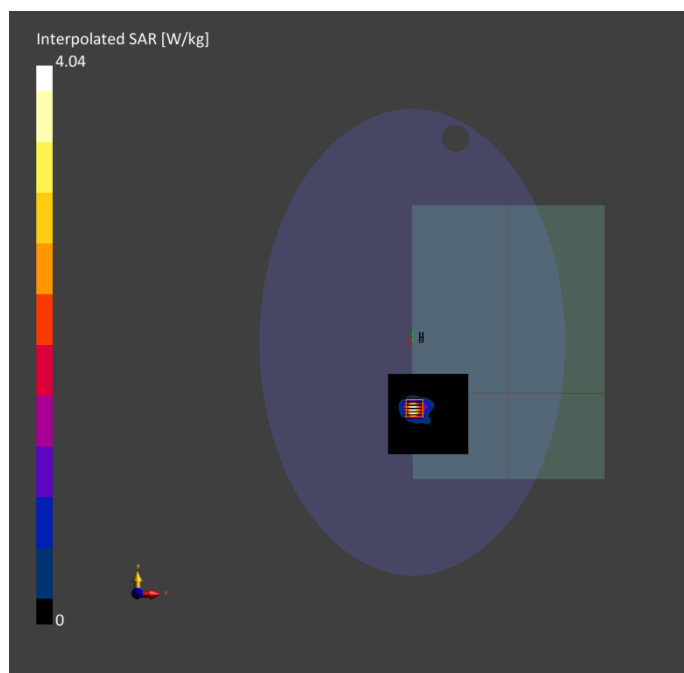

Meas.22 Limbs Plane with Keyboard Side 0mm on 155 Channel in IEEE802.11ac80 mode with Antenna Main
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	BACK, 0.00	WLA N 5GHz	WLAN, 10544- AAC	5775.0, 155	4.98	5.30	35.0	22.3	21.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-01-07	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-07	2025-01-07
psSAR1g [W/kg]	0.899	1.00
psSAR10g [W/kg]	0.303	0.313
Power Drift [dB]	0.03	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		52.3
Dist 3dB Peak [mm]		6.4

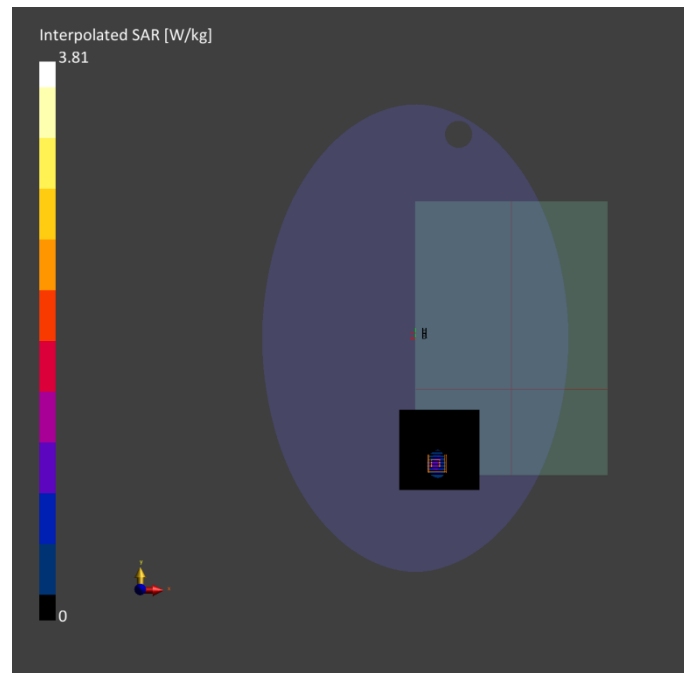

Meas.23 Limbs Plane with Keyboard Side 0mm on 171 Channel in IEEE802.11ac80 mode with Antenna Auxiliary
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	BACK, 0.00	Custo m Band	CW, 10544- AAD	5855.0, 5855000	4.98	5.40	34.8	22.3	21.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-01-07	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-07	2025-01-07
psSAR1g [W/kg]	0.409	0.423
psSAR10g [W/kg]	0.134	0.143
Power Drift [dB]	0.17	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		45.5
Dist 3dB Peak [mm]		6.4

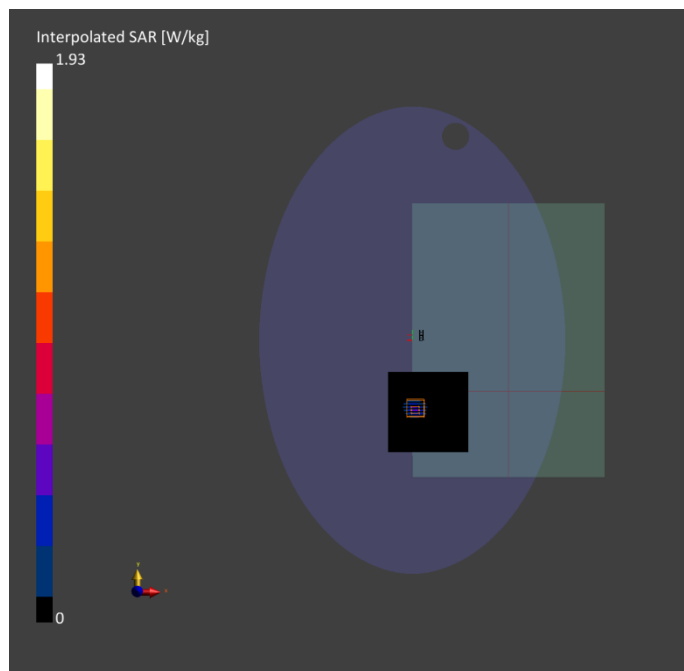

Meas.24 Limbs Plane with Keyboard Side 0mm on 171 Channel in IEEE802.11ac80 mode with Antenna Main
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	BACK, 0.00	Custo m Band	CW, 10544- AAD	5855.0, 5855000	4.98	5.40	34.8	22.3	21.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-01-07	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-07	2025-01-07
psSAR1g [W/kg]	0.691	0.947
psSAR10g [W/kg]	0.211	0.298
Power Drift [dB]	0.03	0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		40.9
Dist 3dB Peak [mm]		6.4

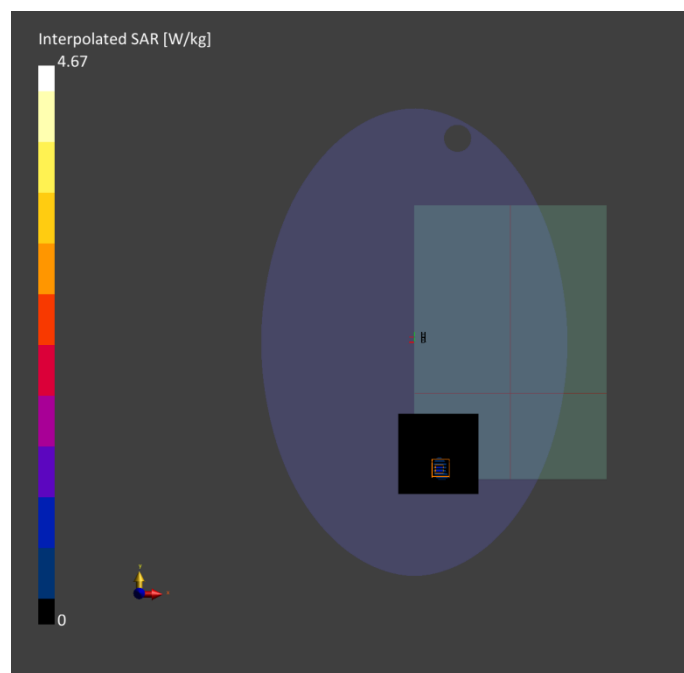

Meas.25 Limbs Plane with Keyboard Side 0mm on 79 Channel in IEEE802.11ax160 mode with Antenna Auxiliary
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	BACK, 0.00	U-NII- 5	WLAN, 10744- AAC	6345.0, 79	5.11	5.88	33.7	22.6	21.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000 2024-12- 27	EX3DV4 - SN7893, 2024-09- 05	DAE4 Sn1710, 2024-01- 03

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 102.0	27.2 x 27.2 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-12-27	2024-12-27
psSAR1g [W/kg]	1.28	1.48
psSAR10g [W/kg]	0.421	0.448
APD4cm ² [W/m ²]		10.3
Power Drift [dB]	0.04	-0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		53.8
Dist 3dB Peak [mm]		5.8

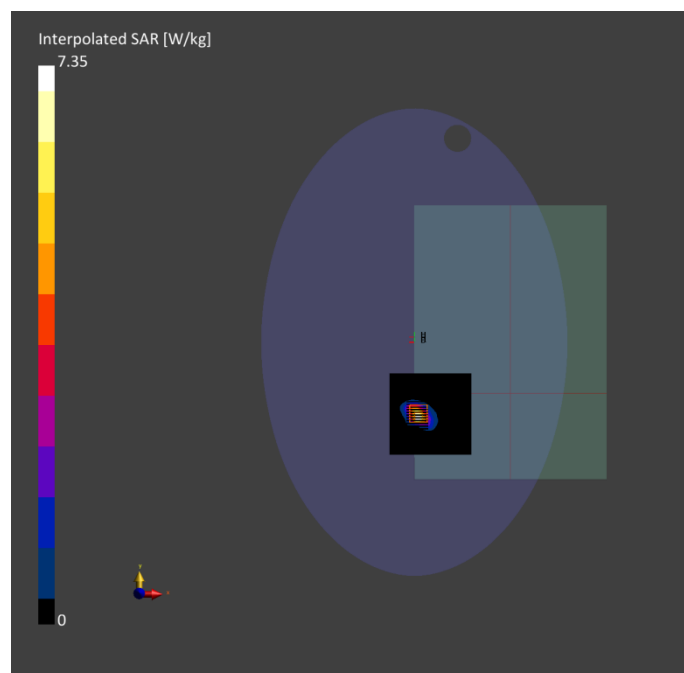

Meas.26 Limbs Plane with Keyboard Side 0mm on 175 Channel in IEEE802.11ax160 mode with Antenna Main
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	BACK, 0.00	U-NII- 7	WLAN, 10743- AAC	6825.0, 175	5.11	6.54	32.7	22.6	21.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2162	HBBL-600-10000 2024-12- 27	EX3DV4 - SN7893, 2024-09- 05	DAE4 Sn1710, 2024-01- 03

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 102.0	27.2 x 27.2 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-12-27	2024-12-27
psSAR1g [W/kg]	1.80	2.00
psSAR10g [W/kg]	0.485	0.518
APD4cm ² [W/m ²]		12.1
Power Drift [dB]	0.04	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		50.8
Dist 3dB Peak [mm]		5.3

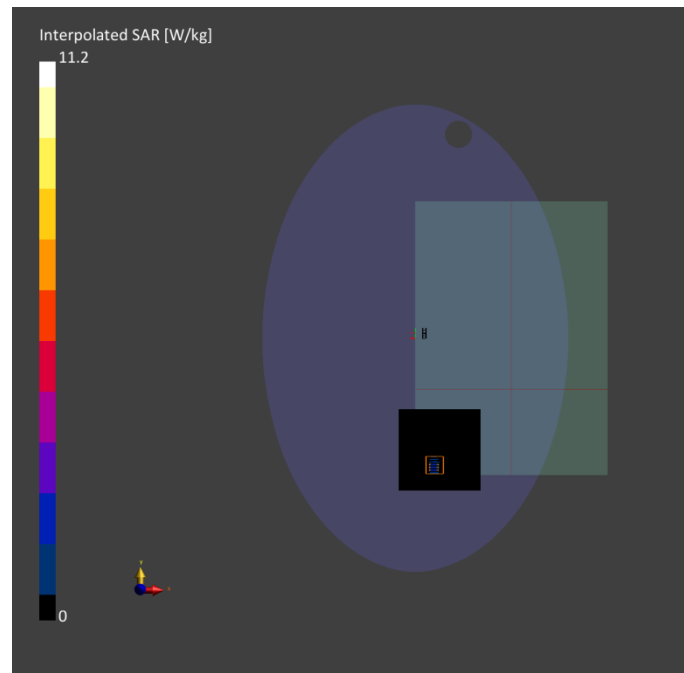

ANNEX D EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ24C0741-AW.pdf”.

ANNEX E SAR TEST SETUP PHOTOS

Please refer the document “BL-SZ24C0741-AS-1.pdf”.

ANNEX F CALIBRATION REPORT

Please refer the document “BL-SZ24C0741-AC-1.pdf”.

ANNEX G TUNE-UP PROCEDURE

Please refer the document “BL-SZ24C0741-AT-1.pdf”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--