

7.7 AC Power Conducted Emissions


Mode C

RF Mode	802.11ax (HE160)	Channel	CH 47 : 6185 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Rex Wang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17000	10.10	31.35	17.59	41.45	27.69	64.96	54.96	-23.51	-27.27
2	0.19000	10.11	38.94	30.52	49.05	40.63	64.04	54.04	-14.99	-13.41
3	0.23000	10.11	28.35	12.48	38.46	22.59	62.45	52.45	-23.99	-29.86
4	0.26200	10.11	28.50	18.55	38.61	28.66	61.37	51.37	-22.76	-22.71
5	0.41000	10.11	26.98	7.49	37.09	17.60	57.65	47.65	-20.56	-30.05
6	0.49800	10.11	25.32	17.26	35.43	27.37	56.03	46.03	-20.60	-18.66

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

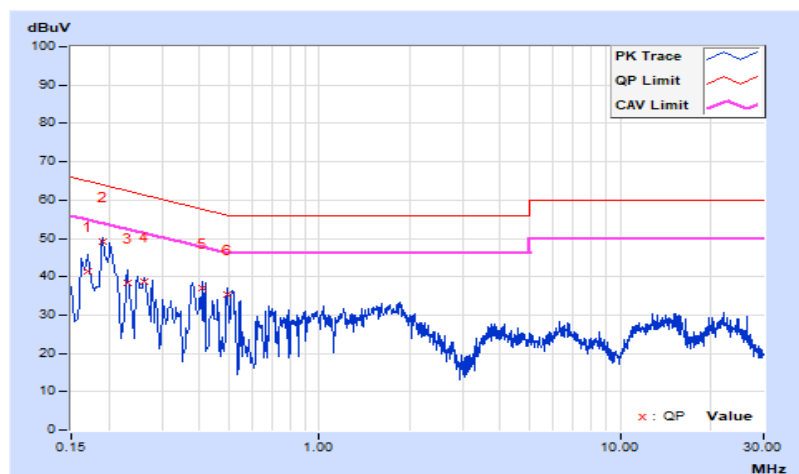


RF Mode	802.11ax (HE160)	Channel	CH 47 : 6185 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Rex Wang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16600	10.13	30.40	16.43	40.53	26.56	65.16	55.16	-24.63	-28.60
2	0.19400	10.14	35.44	24.79	45.58	34.93	63.86	53.86	-18.28	-18.93
3	0.25000	10.14	28.32	17.54	38.46	27.68	61.76	51.76	-23.30	-24.08
4	0.31800	10.14	24.64	16.41	34.78	26.55	59.76	49.76	-24.98	-23.21
5	0.40600	10.14	25.27	10.87	35.41	21.01	57.73	47.73	-22.32	-26.72
6	14.92200	10.52	16.65	8.47	27.17	18.99	60.00	50.00	-32.83	-31.01

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

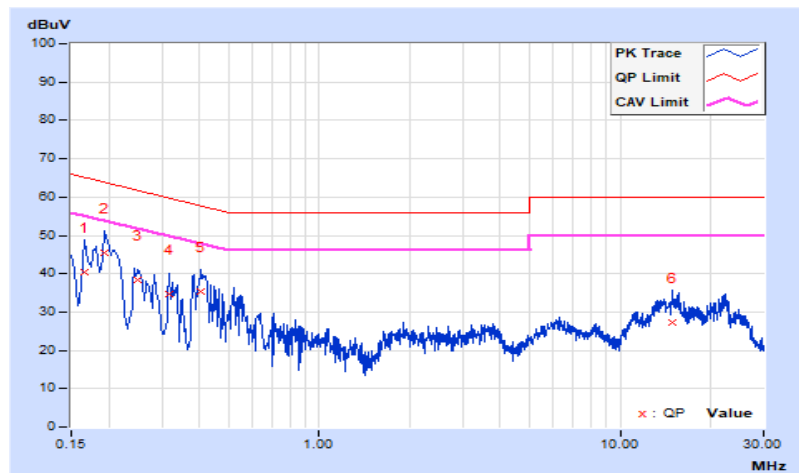


7.8 Unwanted Emissions below 1 GHz

RF Mode	802.11ax (HE160)	Channel	CH 47 : 6185 MHz
Frequency Range	30 MHz ~ 1 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	48.43	35.58 PK	40	-4.42	-77.7	-74.13	12.87	-59.68
2	190.05	35.08 PK	43.5	-8.42	-77.55	-74.95	12.87	-60.18
3	256.86	35.49 PK	46	-10.51	-78.14	-74.08	12.87	-59.77
4	536.34	33.94 PK	46	-12.06	-75.91	-79.04	12.87	-61.32
5	669.47	34.96 PK	46	-11.04	-78.24	-74.78	12.87	-60.3
6	942.77	34.43 PK	46	-11.57	-75.28	-78.84	12.87	-60.83

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

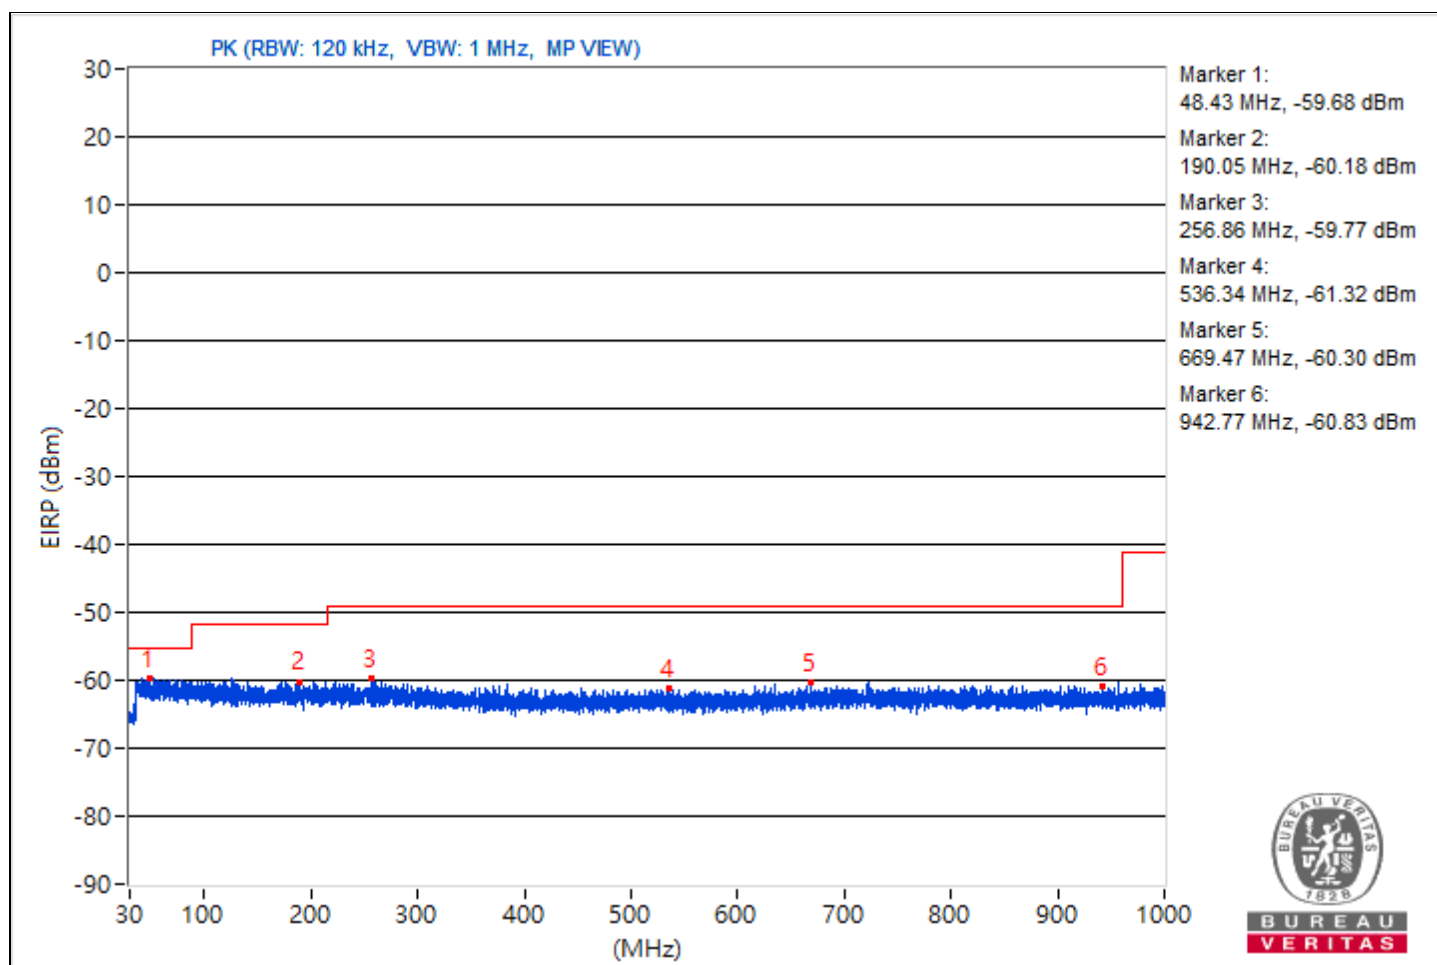


Mode B

RF Mode	802.11ax (HE160)	Channel	CH 47 : 6185 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	99.60	34.7 QP	43.5	-8.8	2.00 H	150	48.0	-13.3
2	199.18	36.7 QP	43.5	-6.8	2.00 H	6	47.9	-11.2
3	298.74	36.5 QP	46.0	-9.5	1.00 H	297	43.3	-6.8
4	547.01	39.3 QP	46.0	-6.7	1.50 H	124	41.6	-2.3
5	646.92	31.7 QP	46.0	-14.3	1.99 H	6	31.8	-0.1
6	797.27	35.3 QP	46.0	-10.7	1.99 H	93	32.5	2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

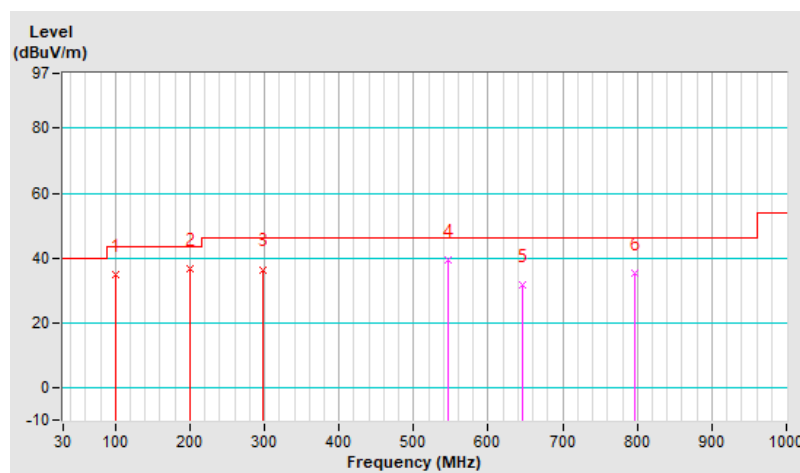


RF Mode	802.11ax (HE160)	Channel	CH 47 : 6185 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	47.46	31.9 QP	40.0	-8.1	1.49 V	13	41.1	-9.2
2	165.80	32.5 QP	43.5	-11.0	1.49 V	240	41.0	-8.5
3	256.01	32.2 QP	46.0	-13.8	1.99 V	159	40.7	-8.5
4	432.55	30.5 QP	46.0	-15.5	1.00 V	191	34.6	-4.1
5	547.01	35.7 QP	46.0	-10.3	1.49 V	42	38.0	-2.3
6	797.27	36.8 QP	46.0	-9.2	1.99 V	24	34.0	2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

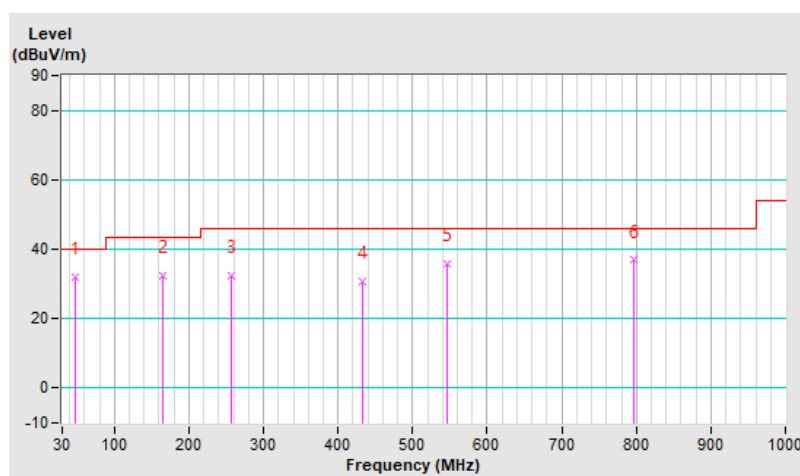


7.9 Unwanted Emissions above 1 GHz


Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hs, Tim Chen, Chris Lin

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5410.16	50.76 PK	74	-23.24	-56.33	-55.12	8.17	-44.5
2	5410.16	37.47 AV	54	-16.53	-68.82	-69.11	8.17	-57.79
3	7497.01	50.55 PK	74	-23.45	-55.76	-56.02	8.17	-44.71
4	7497.01	40.39 AV	54	-13.61	-65.83	-66.28	8.17	-54.87
5	21398.2	53.27 PK	74	-20.73	-52.42	-54.08	8.17	-41.99
6	21398.2	39.94 AV	54	-14.06	-66.82	-66.21	8.17	-55.32
7	22022.4	53.83 PK	74	-20.17	-51.97	-53.37	8.17	-41.43
8	22022.4	40.55 AV	54	-13.45	-65.95	-65.85	8.17	-54.71
9	31682.98	40.64 PK	74	-33.36	-65.93	-65.67	8.17	-54.62
10	31682.98	33.29 AV	54	-20.71	-73.43	-72.88	8.17	-61.97

Note: Margin value = Emission Level - Limit value

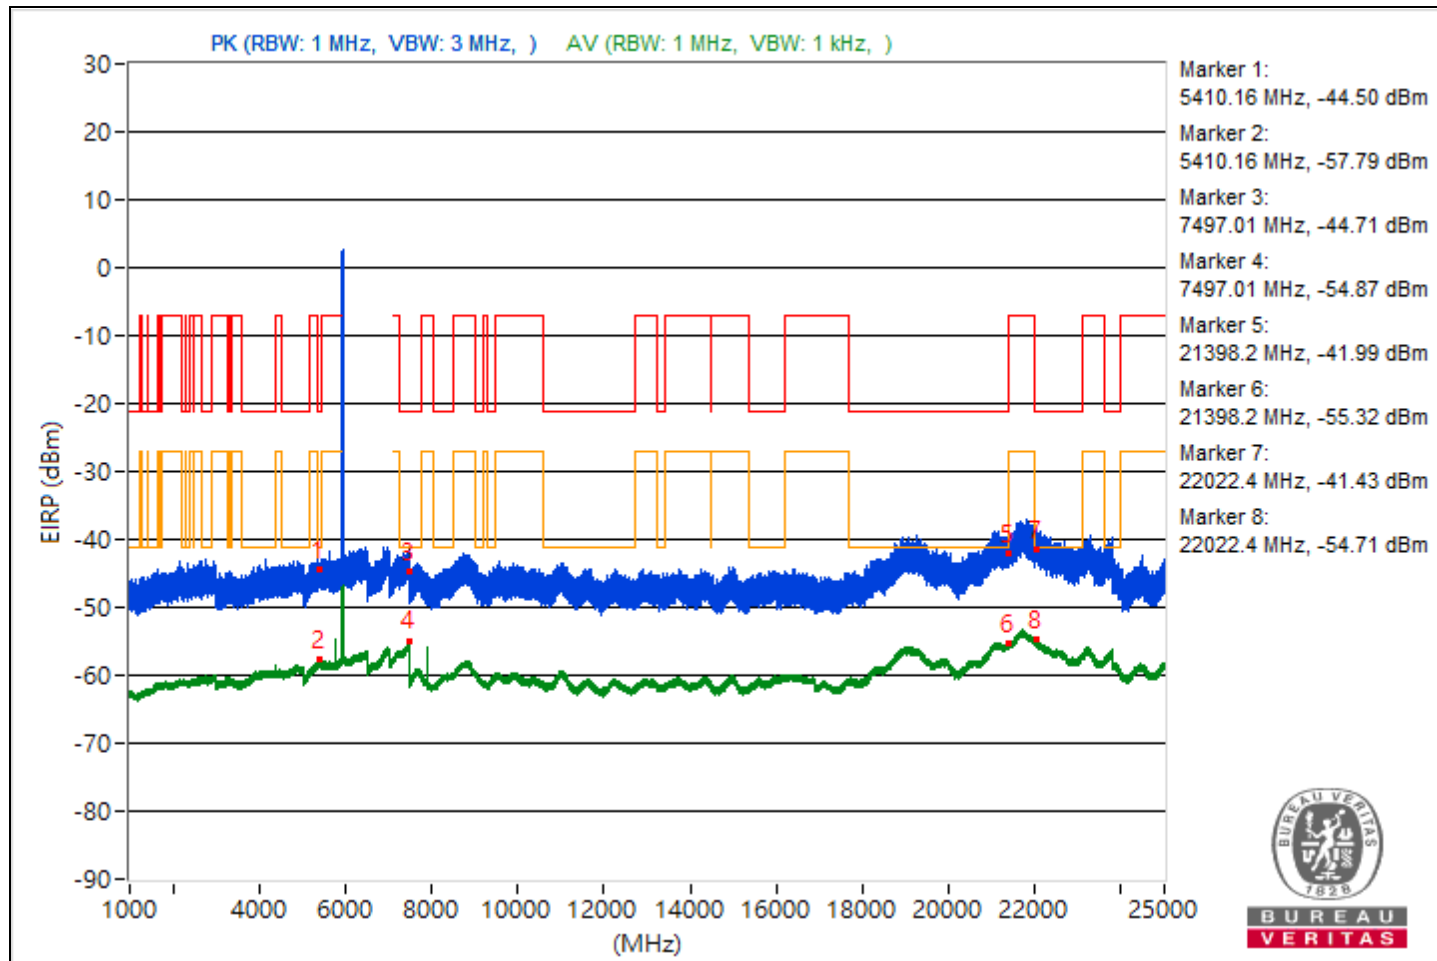


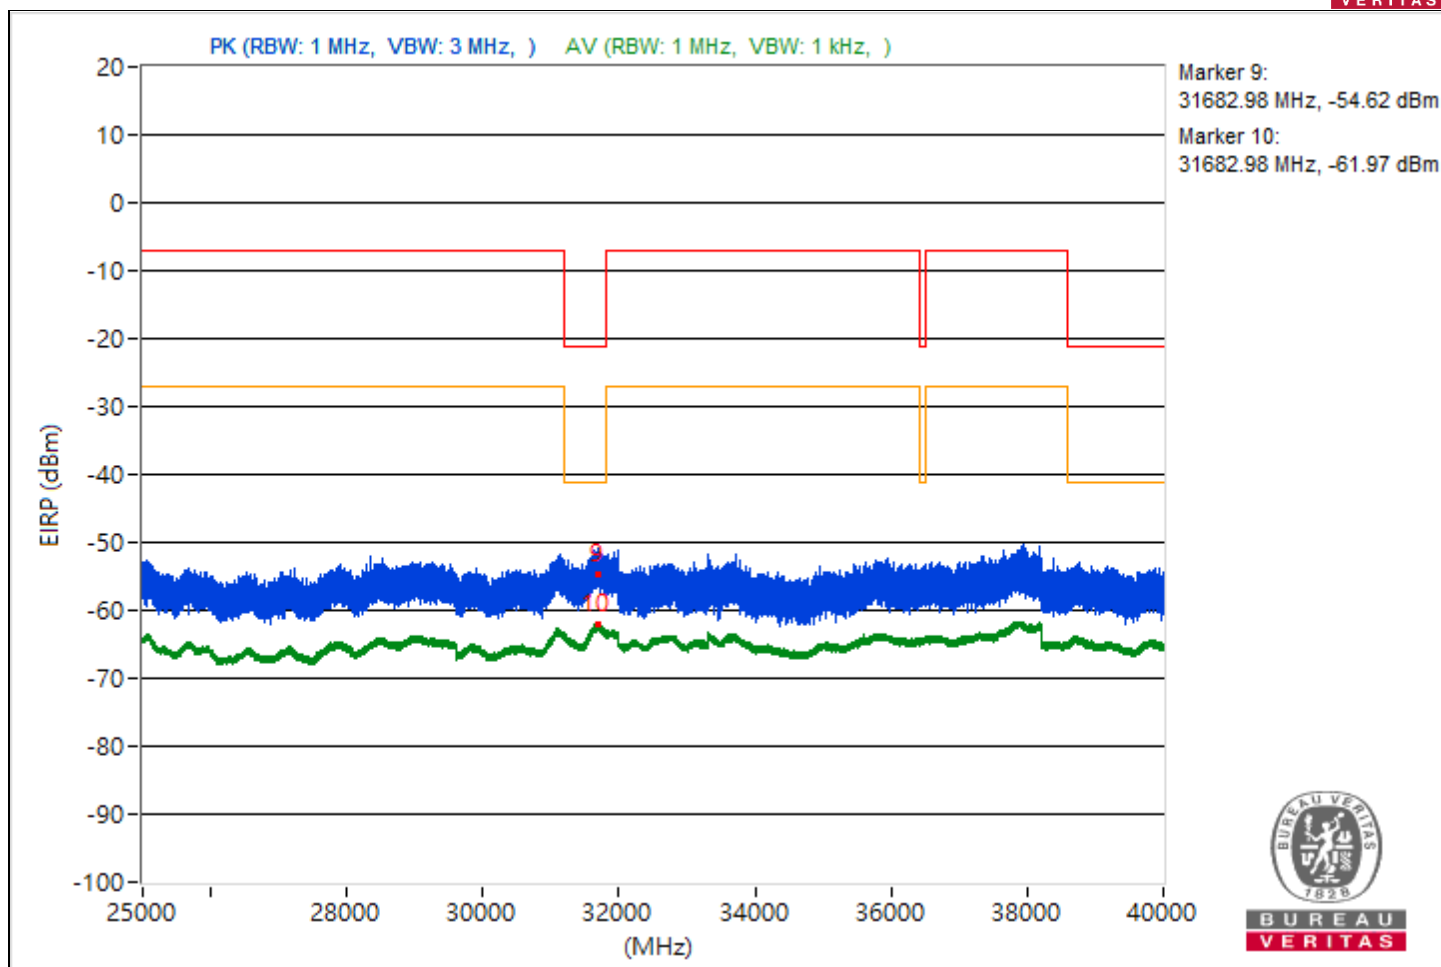


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5413.11	50.26 PK	74	-23.74	-56.36	-56.01	8.17	-45
2	5413.11	37.41 AV	54	-16.59	-68.83	-69.24	8.17	-57.85
3	7498.02	52.19 PK	74	-21.81	-53.79	-54.77	8.17	-43.07
4	7498.02	40.35 AV	54	-13.65	-65.9	-66.3	8.17	-54.91
5	21398.2	53.66 PK	74	-20.34	-52.55	-53.03	8.17	-41.6
6	21398.2	39.95 AV	54	-14.05	-66.1	-66.91	8.17	-55.31
7	22011.6	53.91 PK	74	-20.09	-52.82	-52.25	8.17	-41.35
8	22011.6	40.49 AV	54	-13.51	-65.75	-66.16	8.17	-54.77
9	31683.76	42.22 PK	74	-31.78	-64.98	-63.57	8.17	-53.04
10	31683.76	33.17 AV	54	-20.83	-72.88	-73.7	8.17	-62.09

Note: Margin value = Emission Level - Limit value

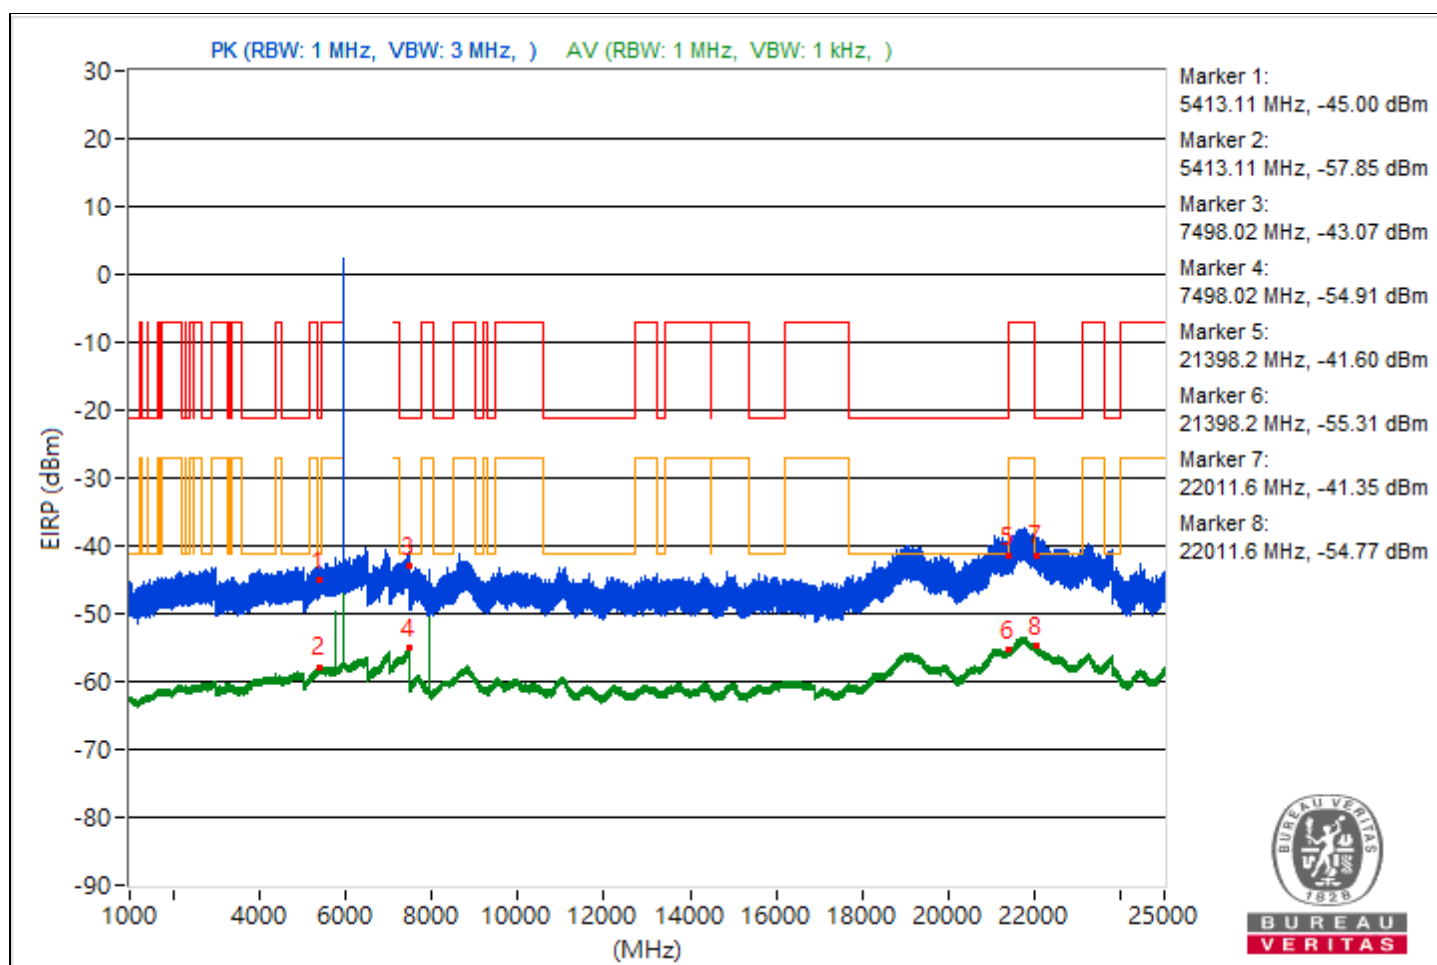


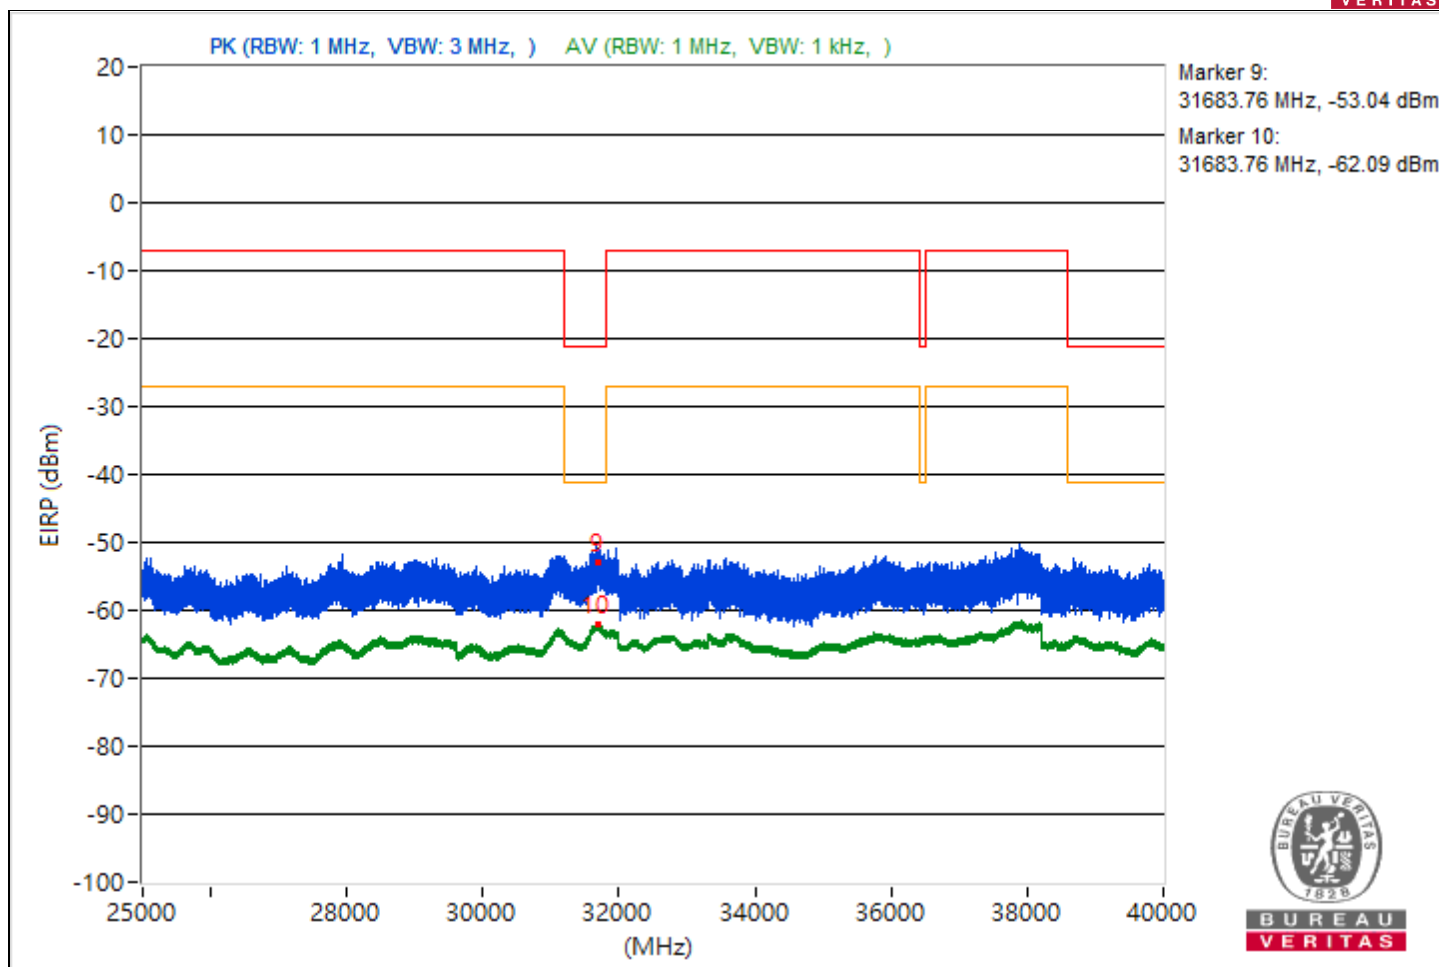


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5451.77	50.51 PK	74	-23.49	-55.91	-55.95	8.17	-44.75
2	5451.77	37.68 AV	54	-16.32	-68.33	-69.25	8.17	-57.58
3	8233.33	52.41 PK	74	-21.59	-52.75	-55.86	8.17	-42.85
4	8233.33	47.02 AV	54	-6.98	-57.83	-61.98	8.17	-48.24
5	21178.5	53.18 PK	74	-20.82	-55.02	-52.01	8.17	-42.08
6	21178.5	39.95 AV	54	-14.05	-66.96	-66.07	8.17	-55.31
7	22019.3	54.2 PK	74	-19.8	-52.75	-51.79	8.17	-41.06
8	22019.3	40.39 AV	54	-13.61	-66.56	-65.6	8.17	-54.87
9	31698.61	42.64 PK	74	-31.36	-64.24	-63.4	8.17	-52.62
10	31698.61	33.41 AV	54	-20.59	-73.37	-72.71	8.17	-61.85

Note: Margin value = Emission Level - Limit value

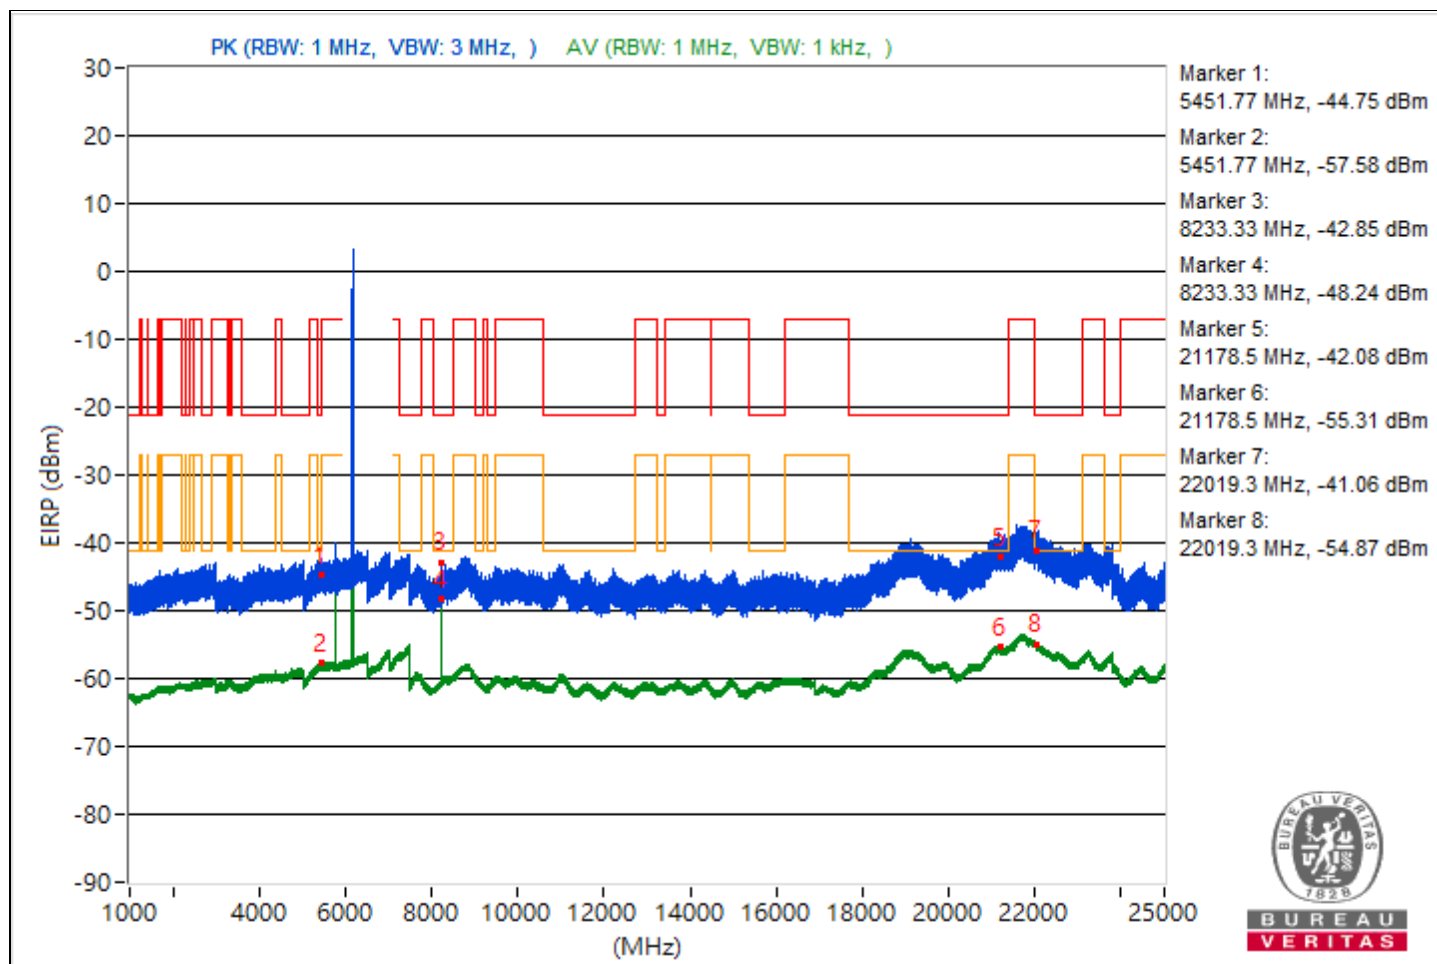


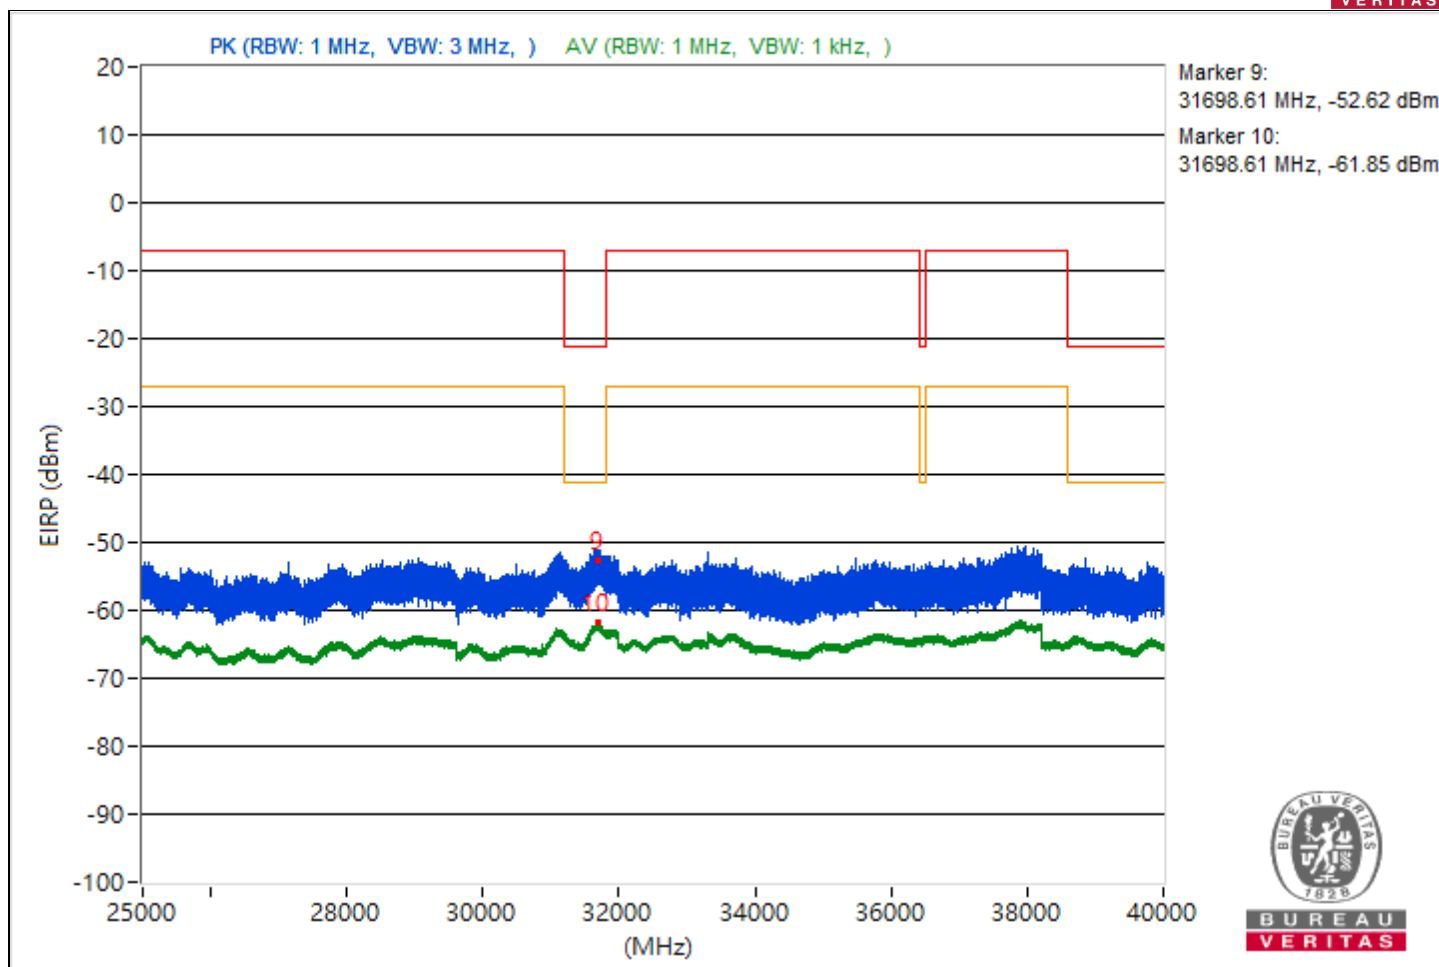


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5439.79	52.31 PK	74	-21.69	-53.54	-54.81	8.17	-42.95
2	5439.79	37.32 AV	54	-16.68	-68.78	-69.49	8.17	-57.94
3	7488.14	52 PK	74	-22	-54.2	-54.7	8.17	-43.26
4	7488.14	40.14 AV	54	-13.86	-66	-66.63	8.17	-55.12
5	21144.2	53.75 PK	74	-20.25	-52.26	-53.18	8.17	-41.51
6	21144.2	40.05 AV	54	-13.95	-66.76	-66.06	8.17	-55.21
7	22040	52.84 PK	74	-21.16	-53.74	-53.46	8.17	-42.42
8	22040	40.34 AV	54	-13.66	-65.82	-66.39	8.17	-54.92
9	31674.27	41.39 PK	74	-32.61	-65.1	-64.99	8.17	-53.87
10	31674.27	33.21 AV	54	-20.79	-73.54	-72.93	8.17	-62.05

Note: Margin value = Emission Level - Limit value

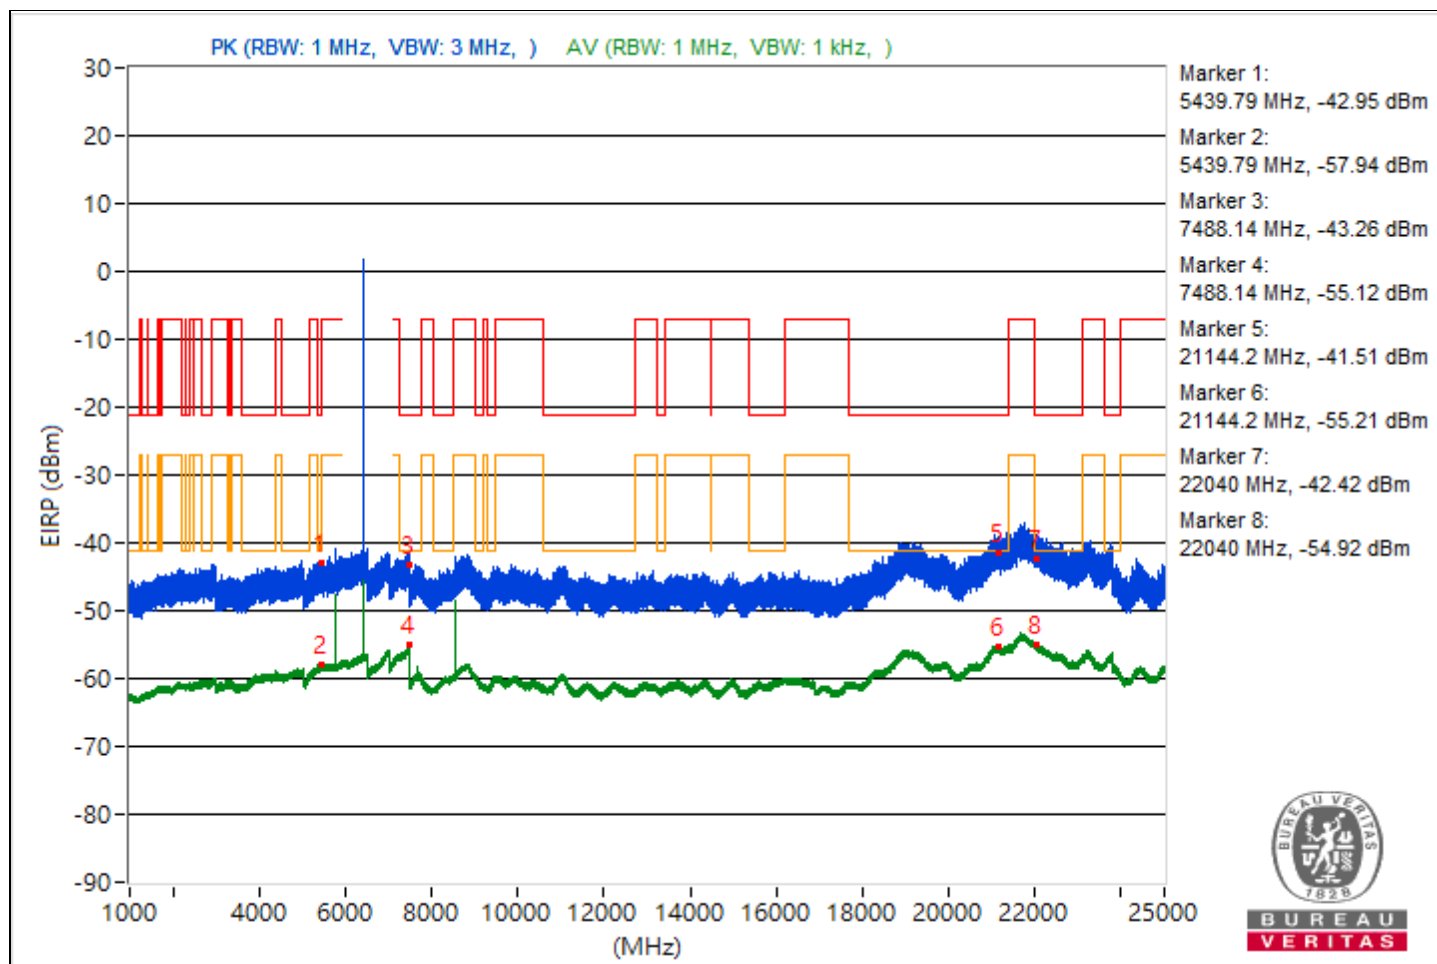


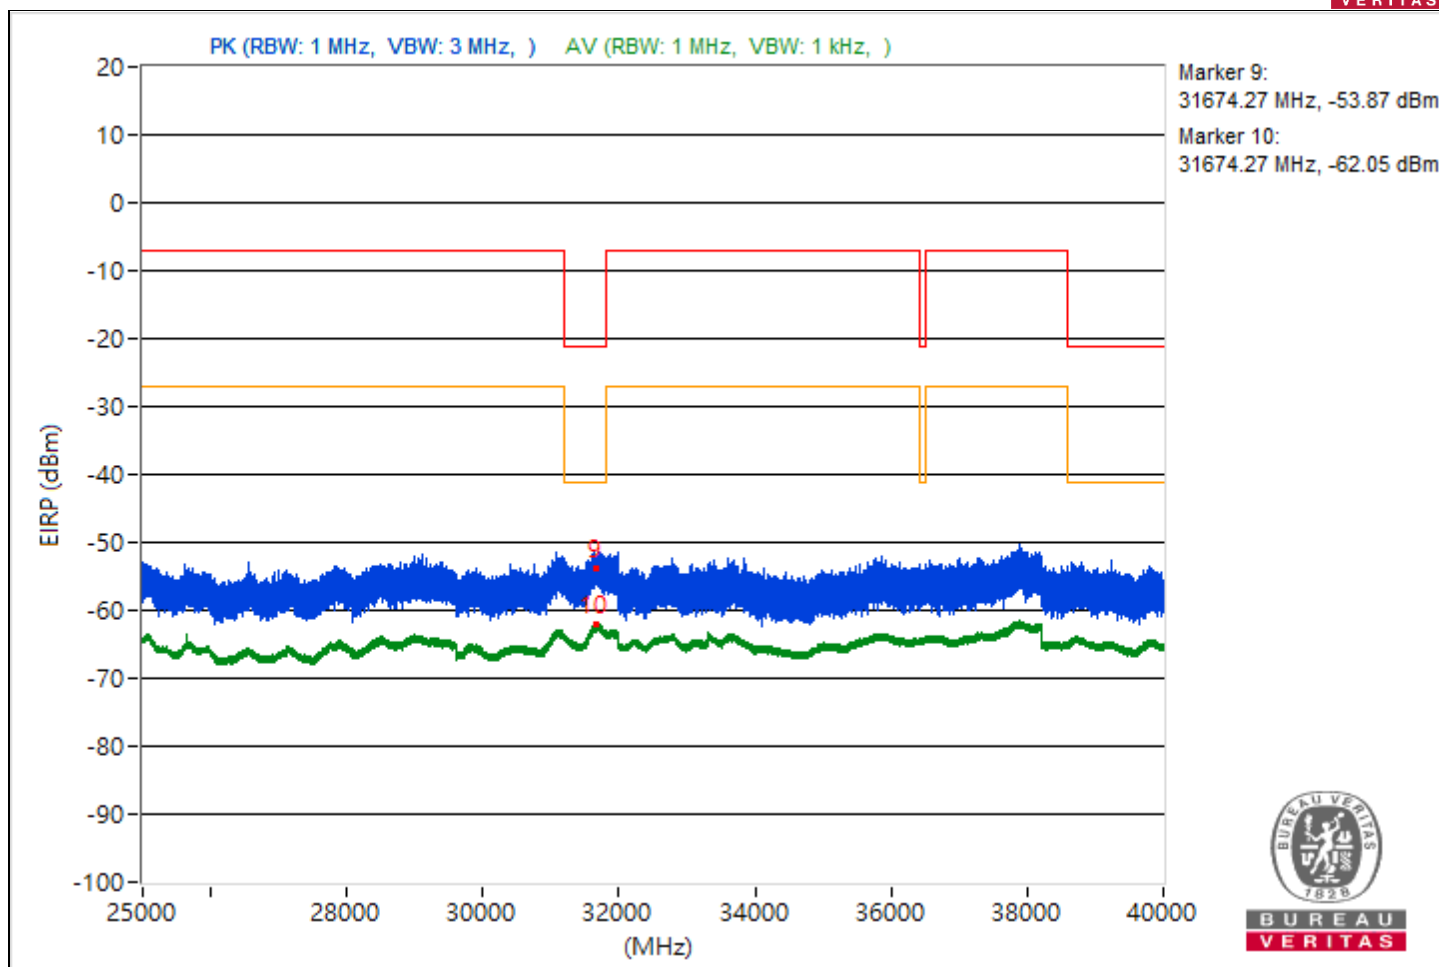


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5437.84	49.04 PK	74	-24.96	-57.37	-57.44	8.17	-46.22
2	5437.84	37.35 AV	54	-16.65	-69.48	-68.74	8.17	-57.91
3	7480.83	51.02 PK	74	-22.98	-55.35	-55.5	8.17	-44.24
4	7480.83	40.24 AV	54	-13.76	-65.98	-66.42	8.17	-55.02
5	21100.8	53.67 PK	74	-20.33	-53.55	-52.12	8.17	-41.59
6	21100.8	40.11 AV	54	-13.89	-66.59	-66.08	8.17	-55.15
7	22014.6	54.21 PK	74	-19.79	-51.92	-52.56	8.17	-41.05
8	22014.6	40.59 AV	54	-13.41	-65.59	-66.14	8.17	-54.67
9	31695.34	41.35 PK	74	-32.65	-63.63	-67.31	8.17	-53.91
10	31695.34	33.19 AV	54	-20.81	-73.61	-72.92	8.17	-62.07

Note: Margin value = Emission Level - Limit value

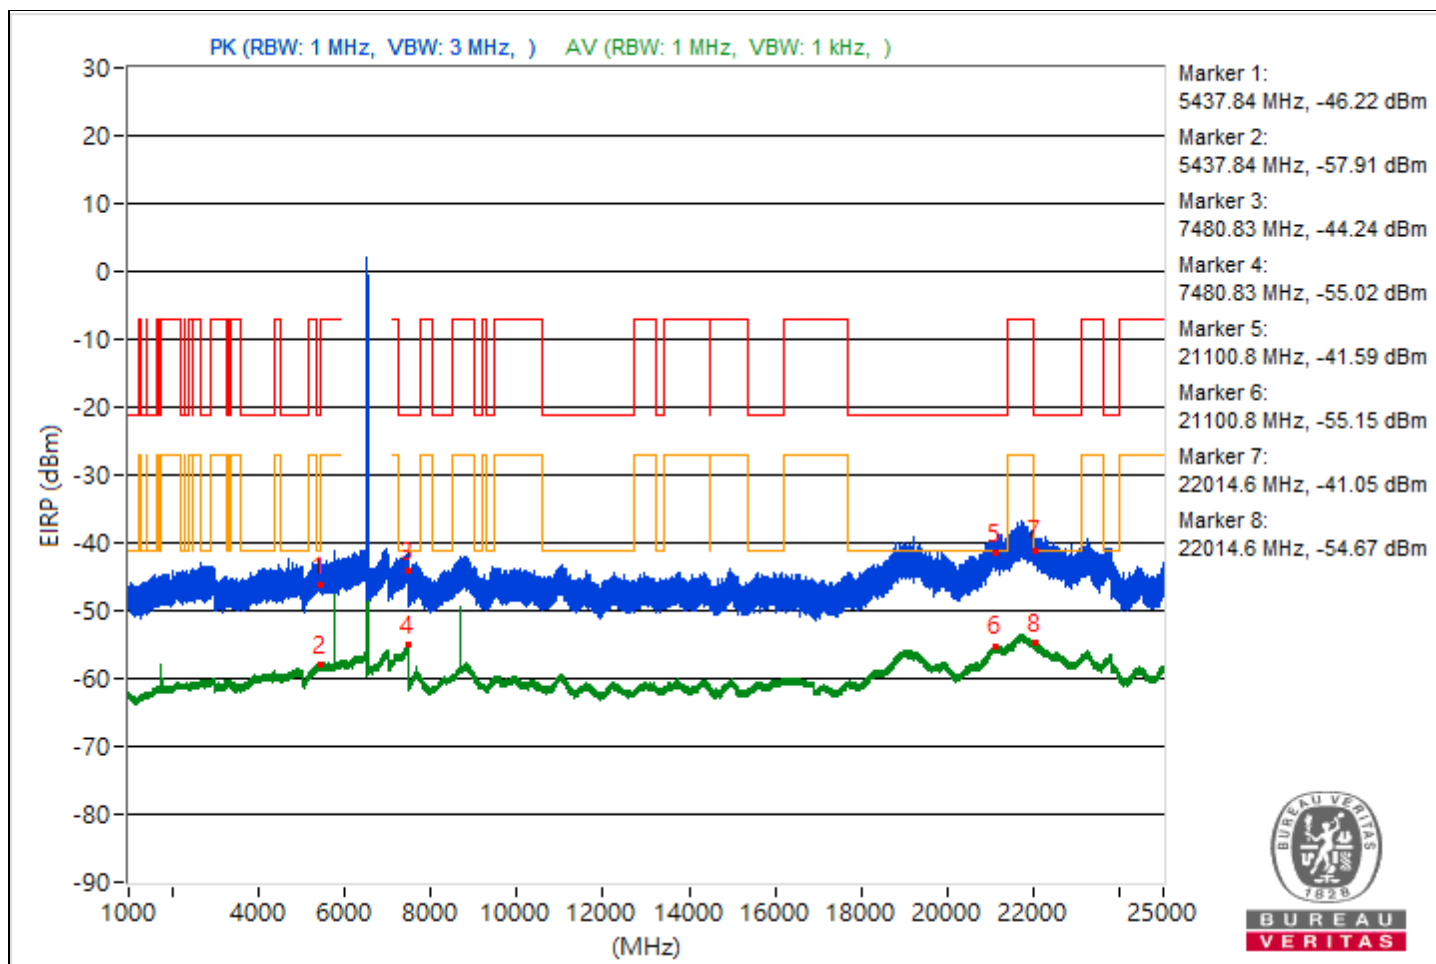


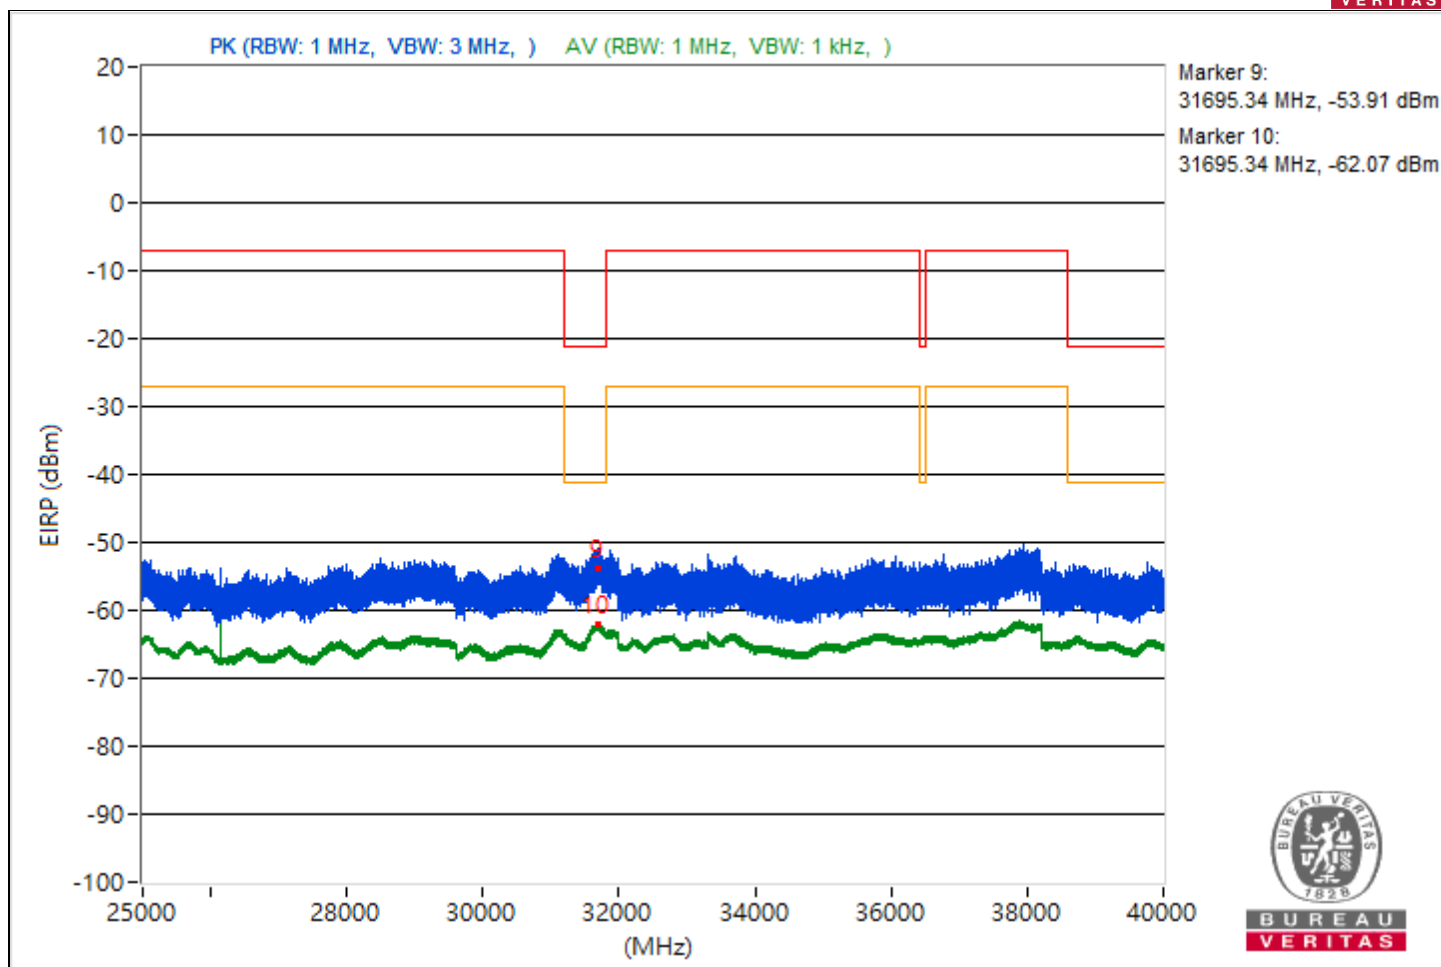


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5440.57	49.72 PK	74	-24.28	-56.04	-57.53	8.17	-45.54
2	5440.57	37.21 AV	54	-16.79	-68.64	-69.91	8.17	-58.05
3	7497.79	52.28 PK	74	-21.72	-55.32	-53.25	8.17	-42.98
4	7497.79	40.18 AV	54	-13.82	-66.04	-66.49	8.17	-55.08
5	21115.8	52.72 PK	74	-21.28	-54.53	-53.03	8.17	-42.54
6	21115.8	40.14 AV	54	-13.86	-65.98	-66.64	8.17	-55.12
7	22048.2	54.34 PK	74	-19.66	-51.93	-52.28	8.17	-40.92
8	22048.2	40.32 AV	54	-13.68	-66.52	-65.75	8.17	-54.94
9	31703.12	43 PK	74	-31	-62.55	-64.57	8.17	-52.26
10	31703.12	33.35 AV	54	-20.65	-73.27	-72.91	8.17	-61.91

Note: Margin value = Emission Level - Limit value

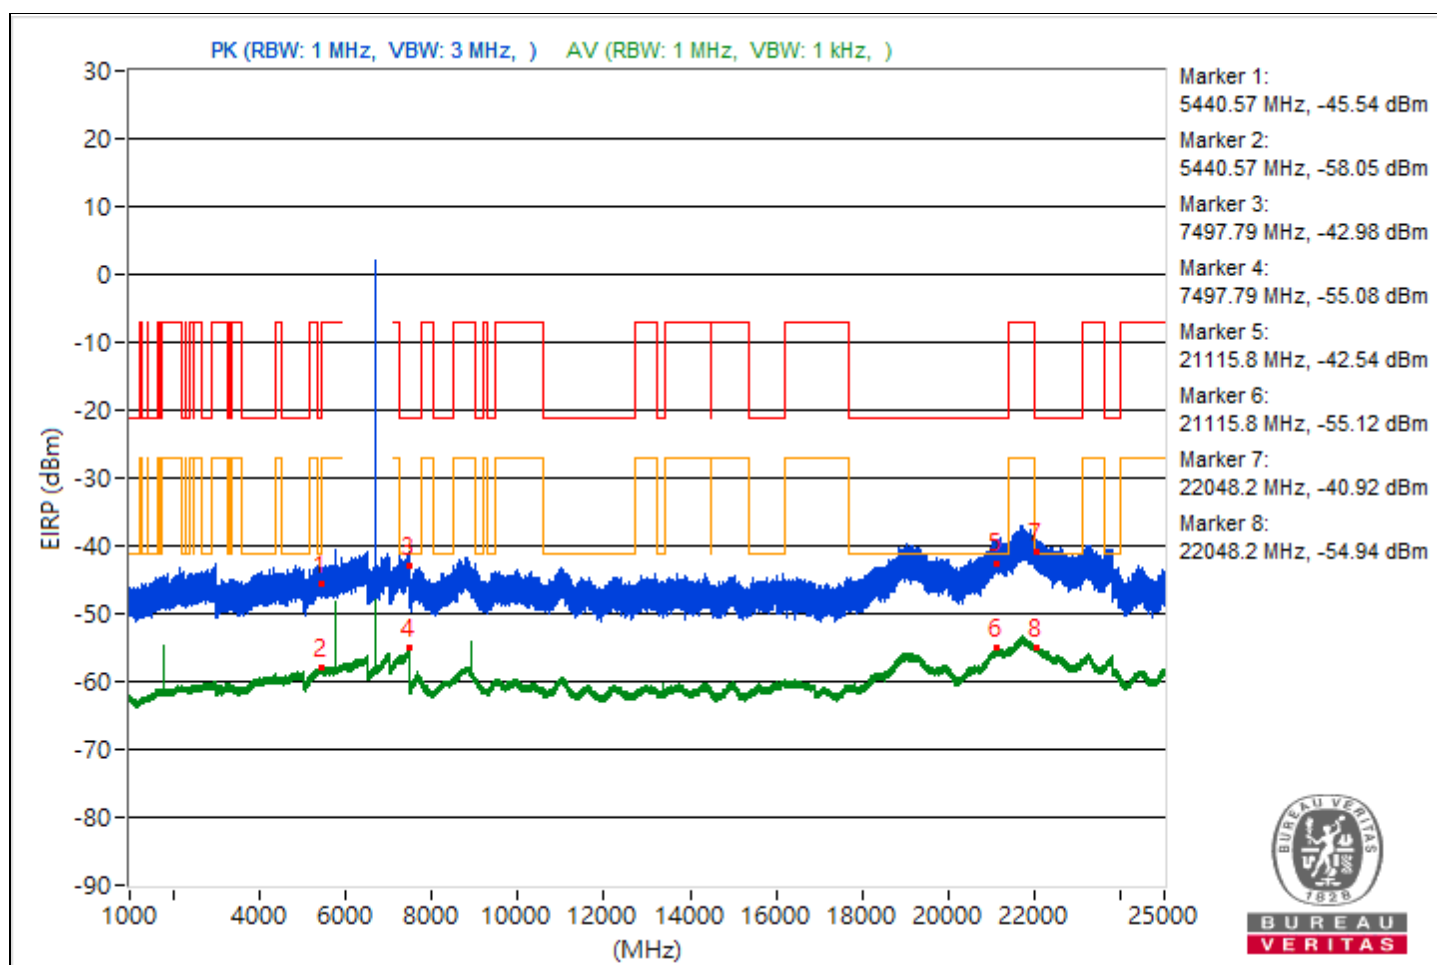


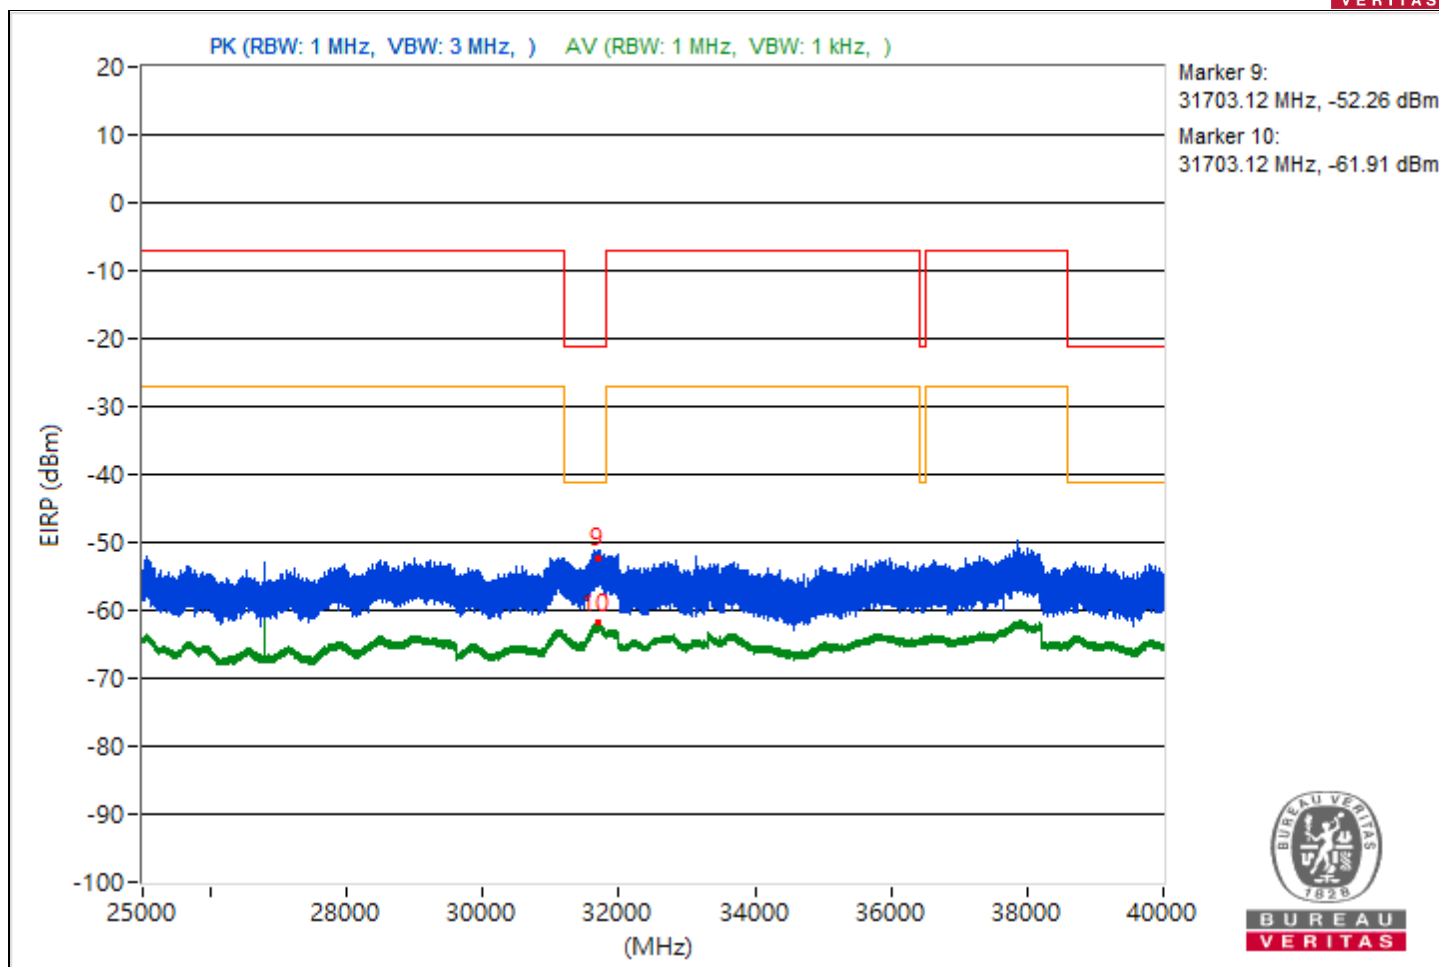


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5458.14	50.87 PK	74	-23.13	-56.39	-54.88	8.17	-44.39
2	5458.14	37.42 AV	54	-16.58	-68.73	-69.34	8.17	-57.84
3	8225.87	54.94 PK	74	-19.06	-49.44	-55.57	8.17	-40.32
4	8225.87	51.76 AV	54	-2.24	-51.97	-63.48	8.17	-43.5
5	21093.8	53.1 PK	74	-20.9	-54.45	-52.45	8.17	-42.16
6	21093.8	39.99 AV	54	-14.01	-66.12	-66.8	8.17	-55.27
7	22019.2	52.69 PK	74	-21.31	-53.75	-53.75	8.17	-42.57
8	22019.2	40.23 AV	54	-13.77	-65.78	-66.69	8.17	-55.03
9	31705.61	41.65 PK	74	-32.35	-63.47	-66.69	8.17	-53.61
10	31705.61	33.32 AV	54	-20.68	-72.82	-73.44	8.17	-61.94

Note: Margin value = Emission Level - Limit value

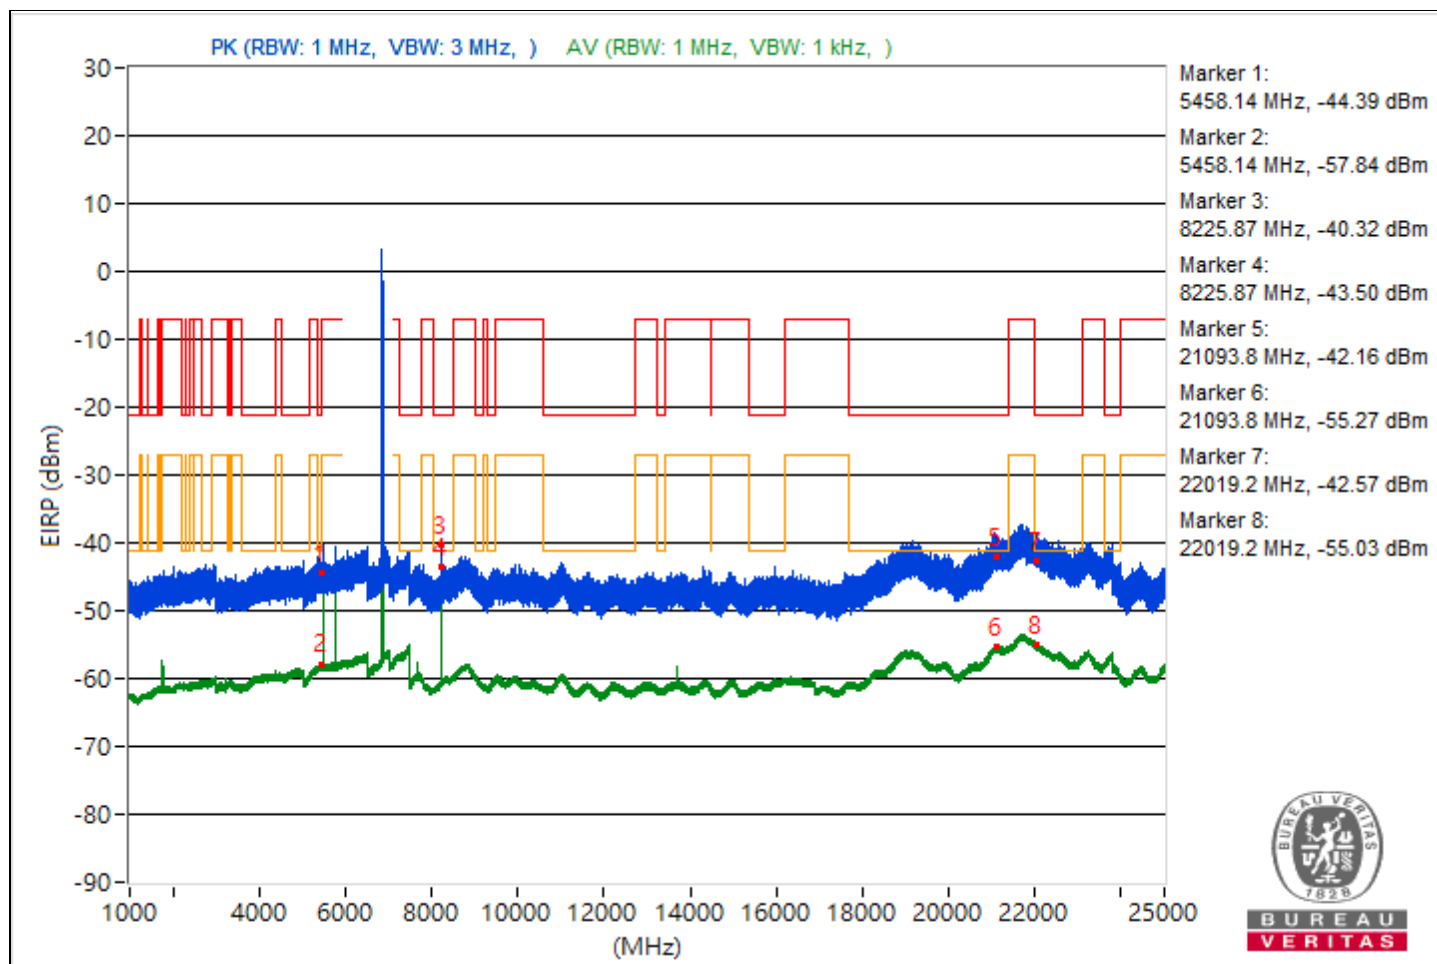


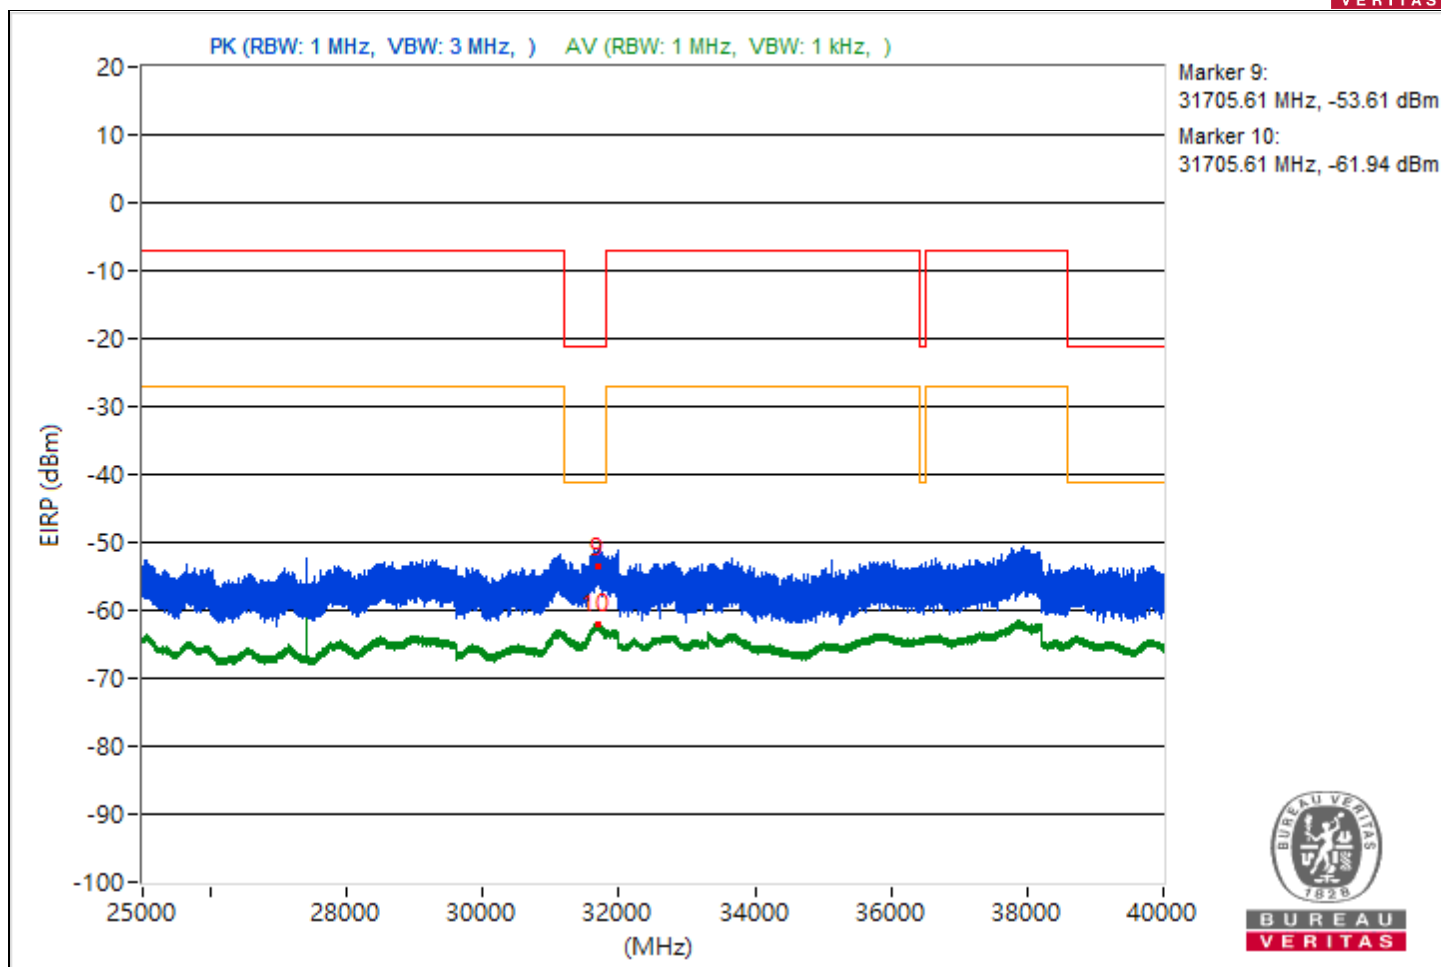


RF Mode	802.11ax (HE20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5425.17	51.35 PK	74	-22.65	-56.72	-53.91	8.17	-43.91
2	5425.17	37.15 AV	54	-16.85	-68.91	-69.7	8.17	-58.11
3	7493.12	52.18 PK	74	-21.82	-54.44	-54.09	8.17	-43.08
4	7493.12	40.15 AV	54	-13.85	-66.72	-65.9	8.17	-55.11
5	21376.7	53.71 PK	74	-20.29	-52.34	-53.16	8.17	-41.55
6	21376.7	40.09 AV	54	-13.91	-66.7	-66.03	8.17	-55.17
7	22022	52.48 PK	74	-21.52	-55.58	-52.79	8.17	-42.78
8	22022	40.42 AV	54	-13.58	-65.56	-66.53	8.17	-54.84
9	31694.64	41.91 PK	74	-32.09	-66.25	-63.3	8.17	-53.35
10	31694.64	33.34 AV	54	-20.66	-72.76	-73.47	8.17	-61.92

Note: Margin value = Emission Level - Limit value

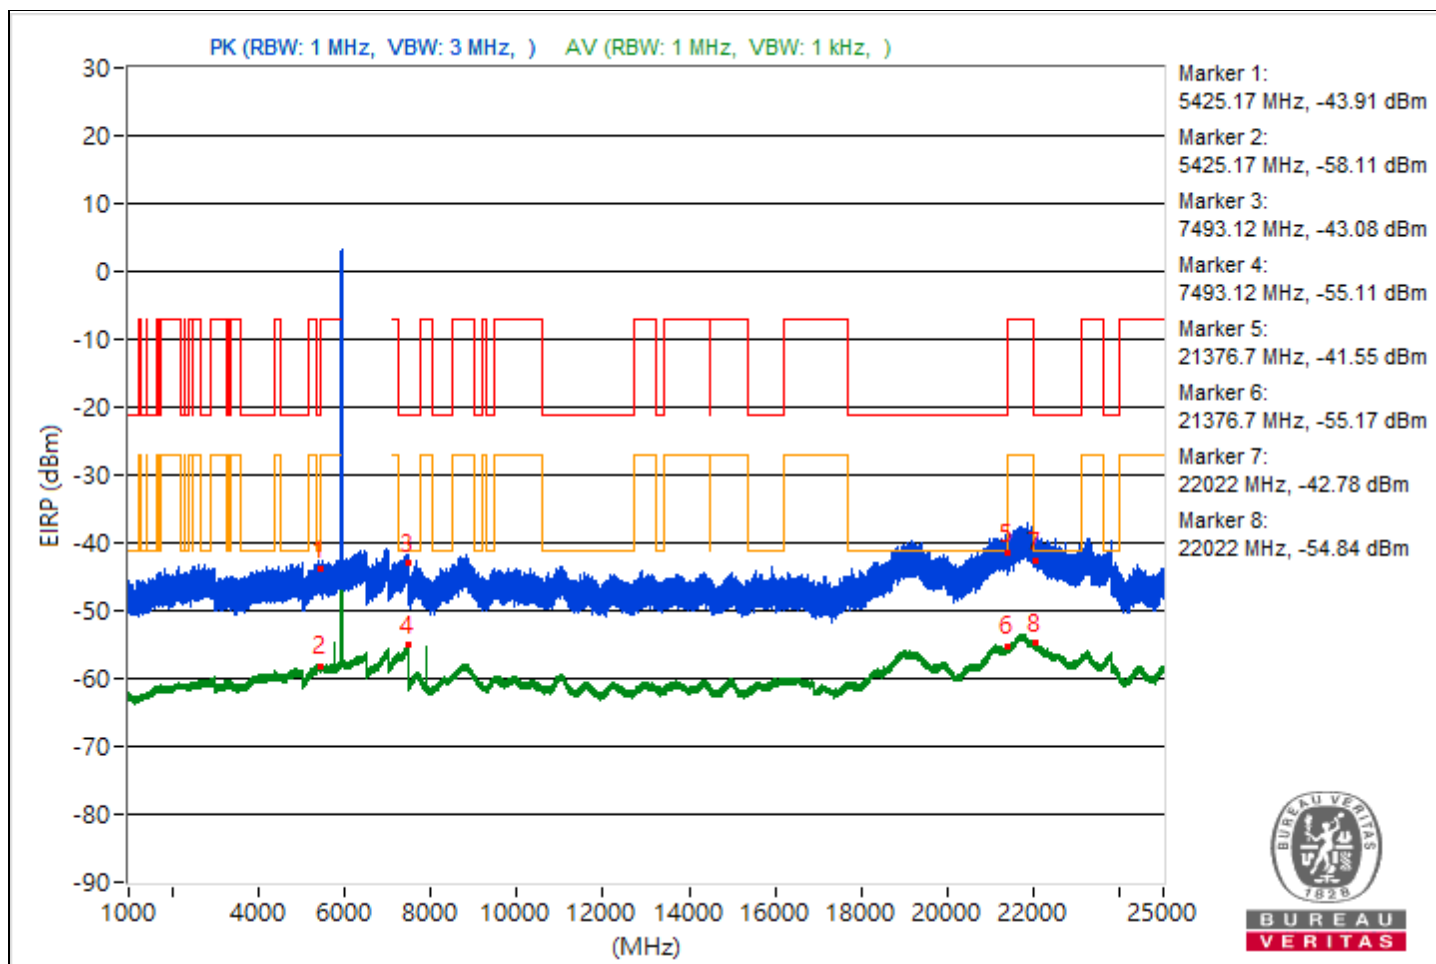


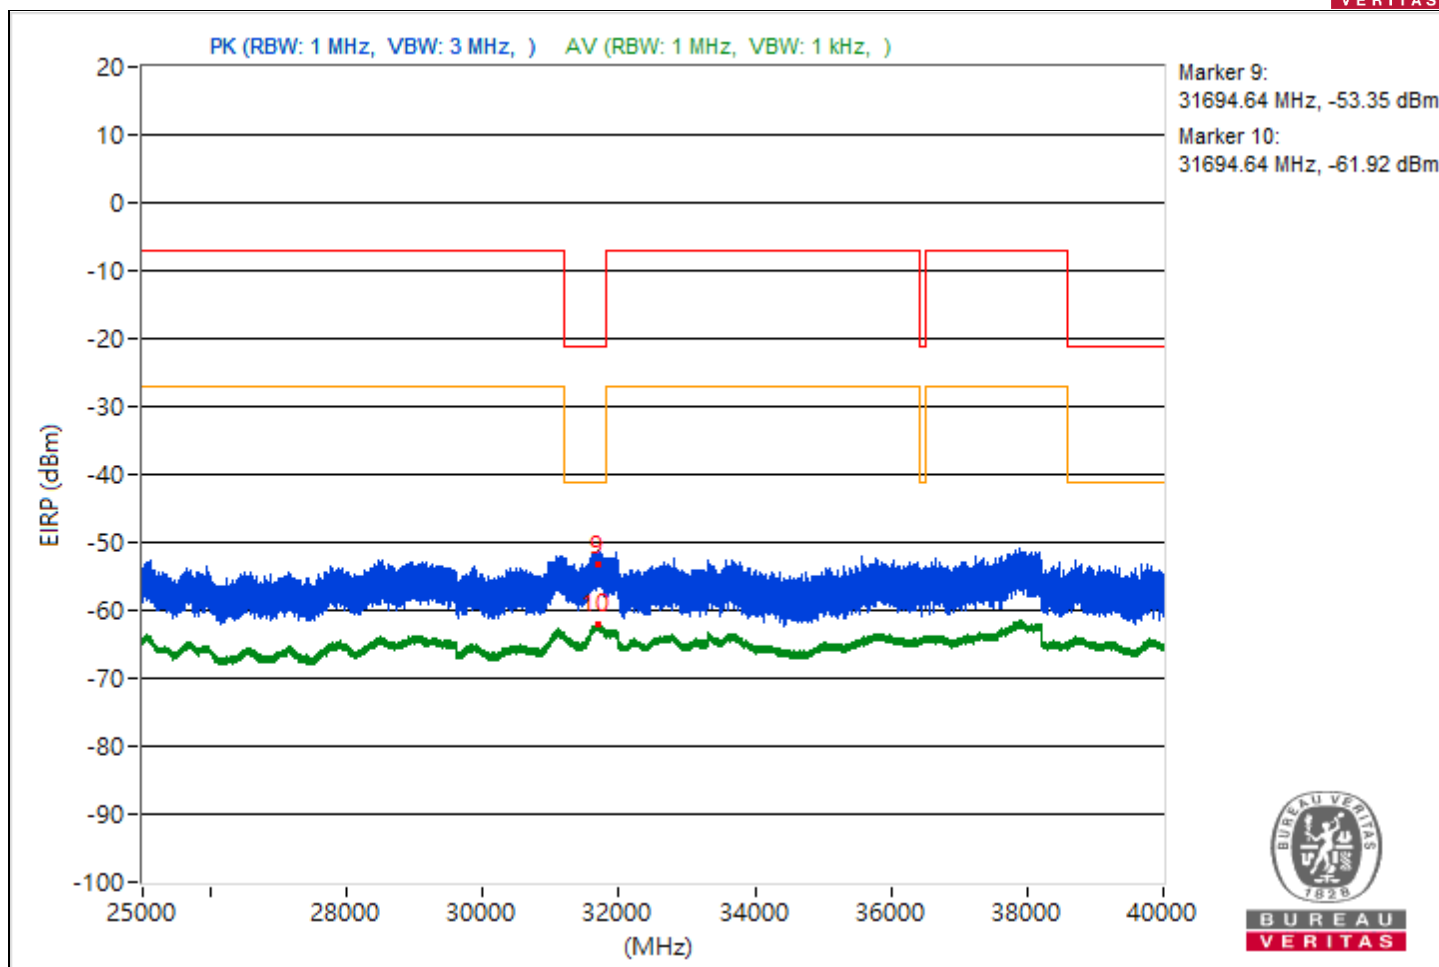


RF Mode	802.11ax (HE20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5414.36	50.29 PK	74	-23.71	-56.52	-55.81	8.17	-44.97
2	5414.36	37.28 AV	54	-16.72	-68.72	-69.65	8.17	-57.98
3	7487.76	52.22 PK	74	-21.78	-54.43	-54.03	8.17	-43.04
4	7487.76	40.19 AV	54	-13.81	-65.88	-66.66	8.17	-55.07
5	21145.9	53.95 PK	74	-20.05	-53.92	-51.41	8.17	-41.31
6	21145.9	40.08 AV	54	-13.92	-65.84	-66.95	8.17	-55.18
7	22020.2	52.73 PK	74	-21.27	-54.07	-53.38	8.17	-42.53
8	22020.2	40.42 AV	54	-13.58	-66.35	-65.7	8.17	-54.84
9	31708.02	41.96 PK	74	-32.04	-65.22	-63.85	8.17	-53.3
10	31708.02	33.29 AV	54	-20.71	-72.6	-73.77	8.17	-61.97

Note: Margin value = Emission Level - Limit value

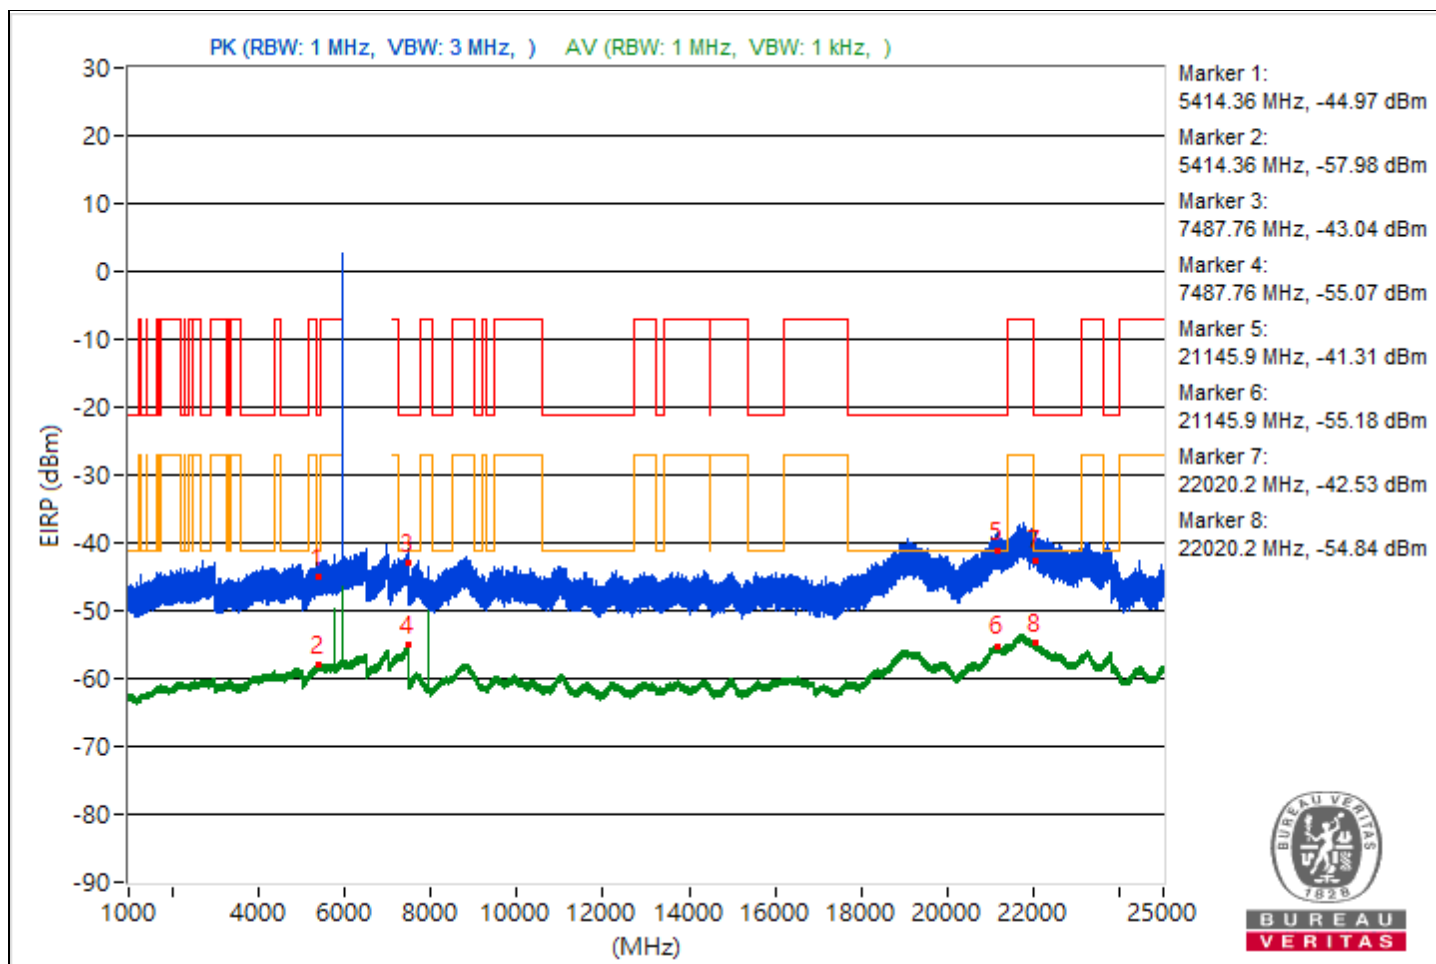

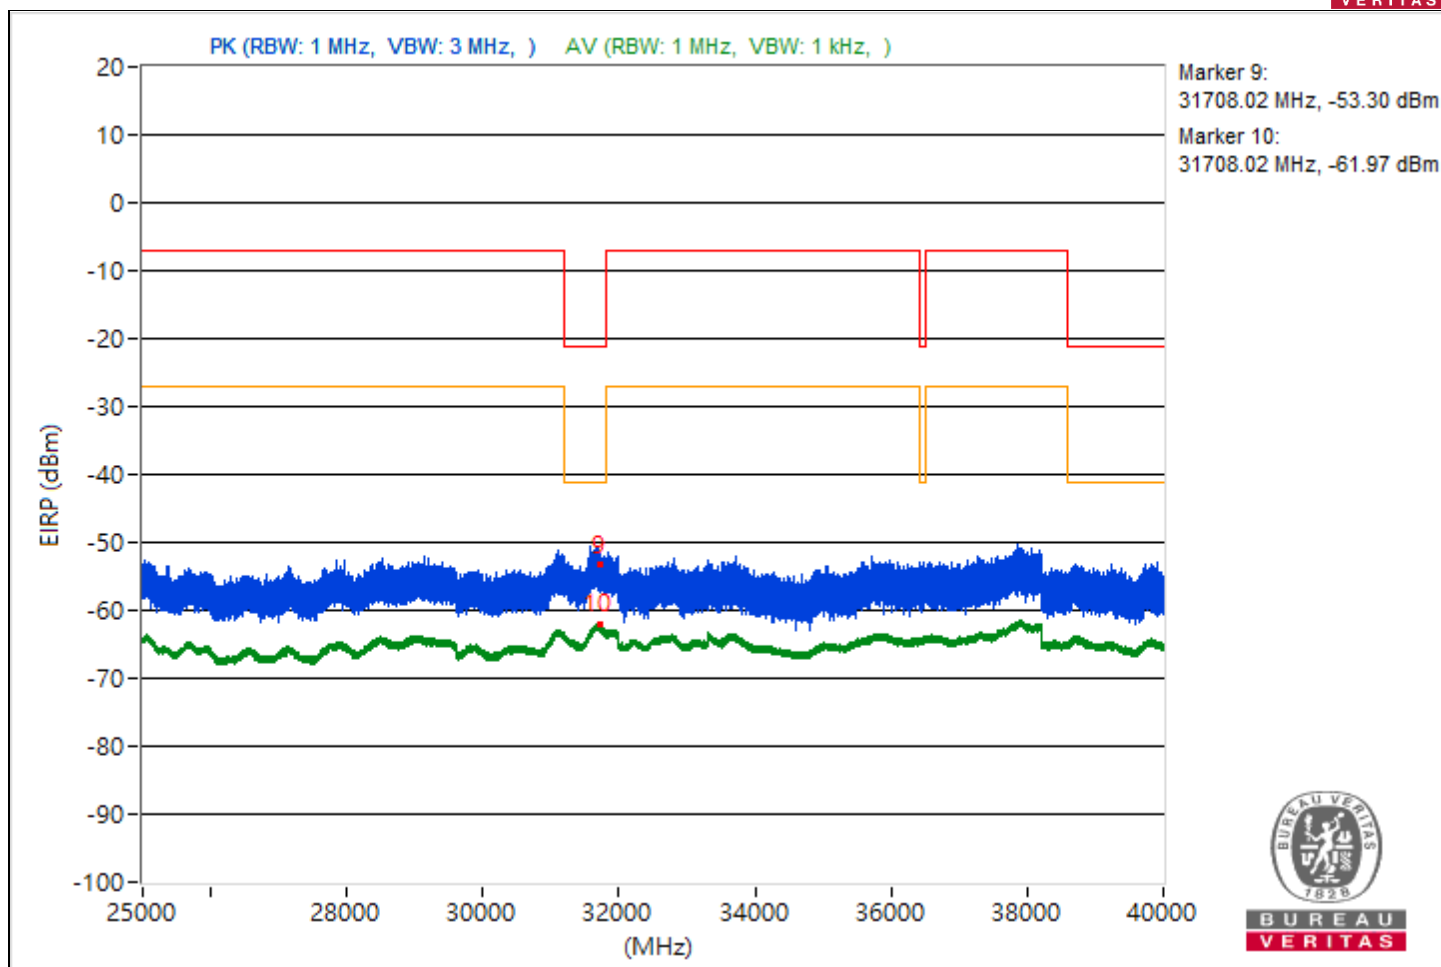



RF Mode	802.11ax (HE20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5760	56.9 PK	88.26	-31.36	-48.72	-50.56	8.17	-38.36
2	#5760	51.51 AV	68.26	-16.75	-53.24	-57.73	8.17	-43.75
3	8233.33	52.86 PK	74	-21.14	-52.74	-54.62	8.17	-42.4
4	8233.33	47.67 AV	54	-6.33	-56.91	-62.11	8.17	-47.59
5	21179.5	54.1 PK	74	-19.9	-52.73	-51.99	8.17	-41.16
6	21179.5	40.08 AV	54	-13.92	-65.88	-66.9	8.17	-55.18
7	22010	54.09 PK	74	-19.91	-52.02	-52.71	8.17	-41.17
8	22010	40.4 AV	54	-13.6	-66.31	-65.78	8.17	-54.86
9	31662.76	40.93 PK	74	-33.07	-65.03	-66.05	8.17	-54.33
10	31662.76	33.28 AV	54	-20.72	-73.4	-72.93	8.17	-61.98

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

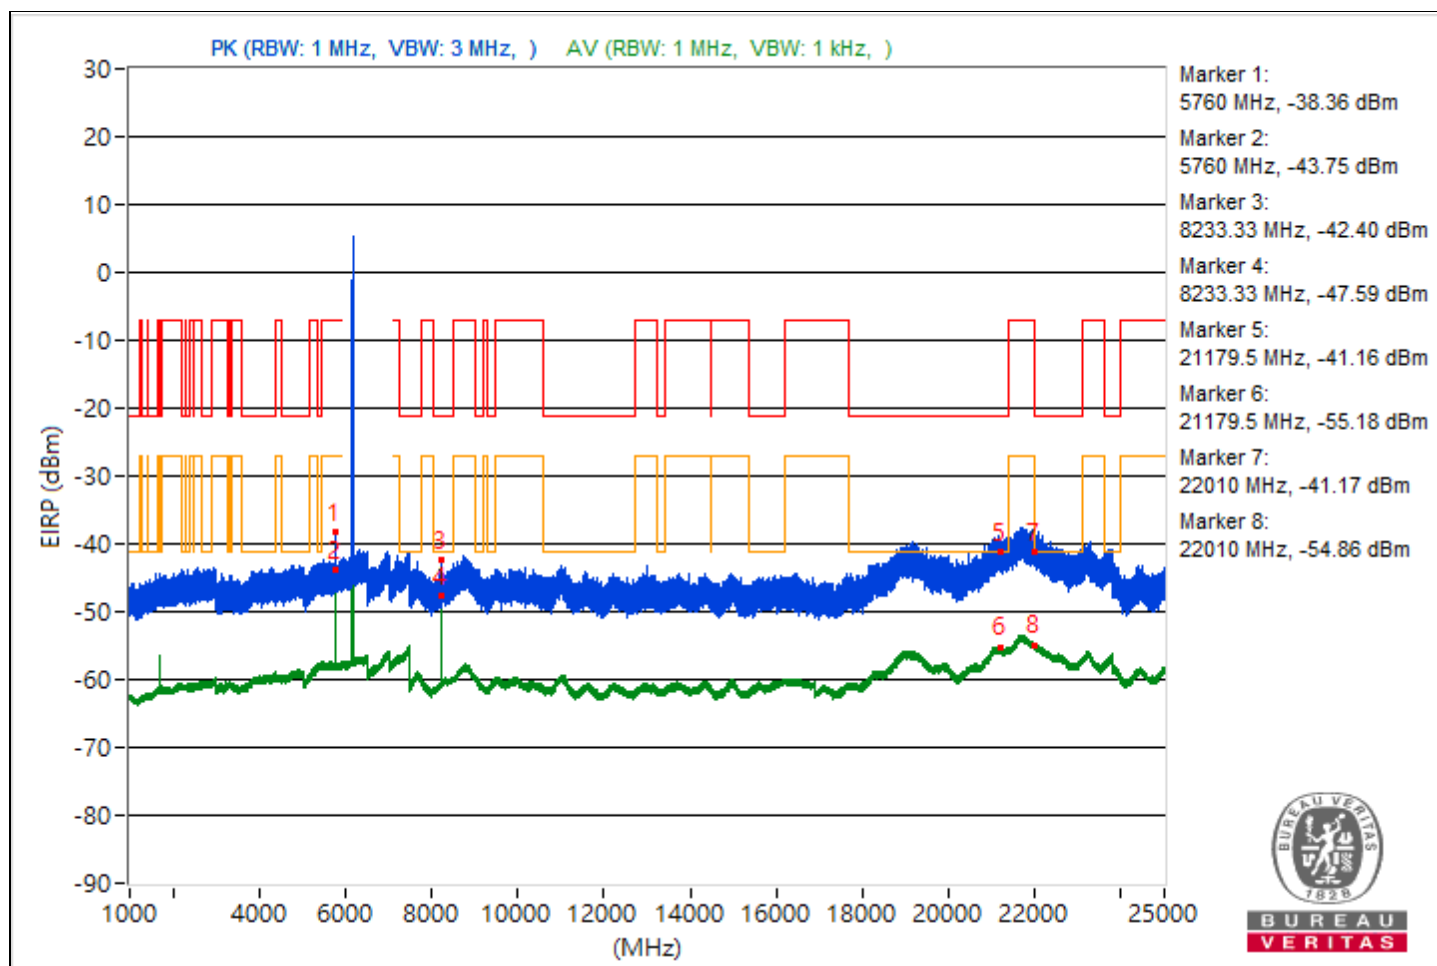


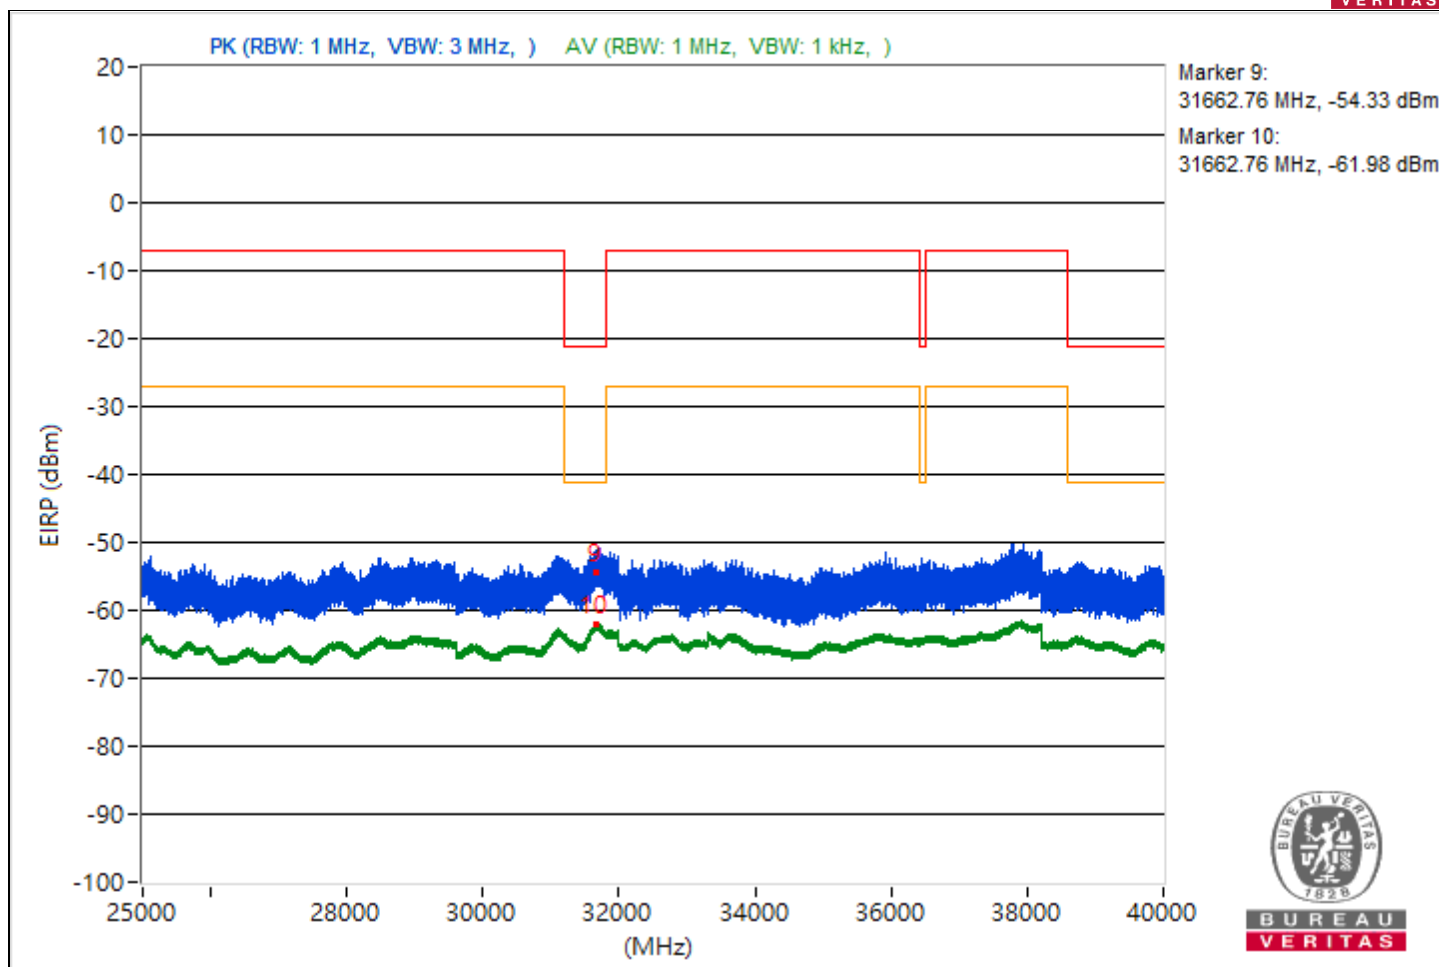


RF Mode	802.11ax (HE20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5358.51	49.92 PK	74	-24.08	-55.56	-57.74	8.17	-45.34
2	5358.51	37.32 AV	54	-16.68	-68.73	-69.54	8.17	-57.94
3	7489.86	51.46 PK	74	-22.54	-54.97	-55	8.17	-43.8
4	7489.86	40.15 AV	54	-13.85	-66.01	-66.58	8.17	-55.11
5	21174.5	54.8 PK	74	-19.2	-51.95	-51.35	8.17	-40.46
6	21174.5	40.07 AV	54	-13.93	-66.19	-66.55	8.17	-55.19
7	22016.1	55.18 PK	74	-18.82	-50.78	-51.8	8.17	-40.08
8	22016.1	40.46 AV	54	-13.54	-66.28	-65.71	8.17	-54.8
9	31701.18	41.86 PK	74	-32.14	-66.37	-63.32	8.17	-53.4
10	31701.18	33.29 AV	54	-20.71	-73.5	-72.82	8.17	-61.97

Note: Margin value = Emission Level - Limit value

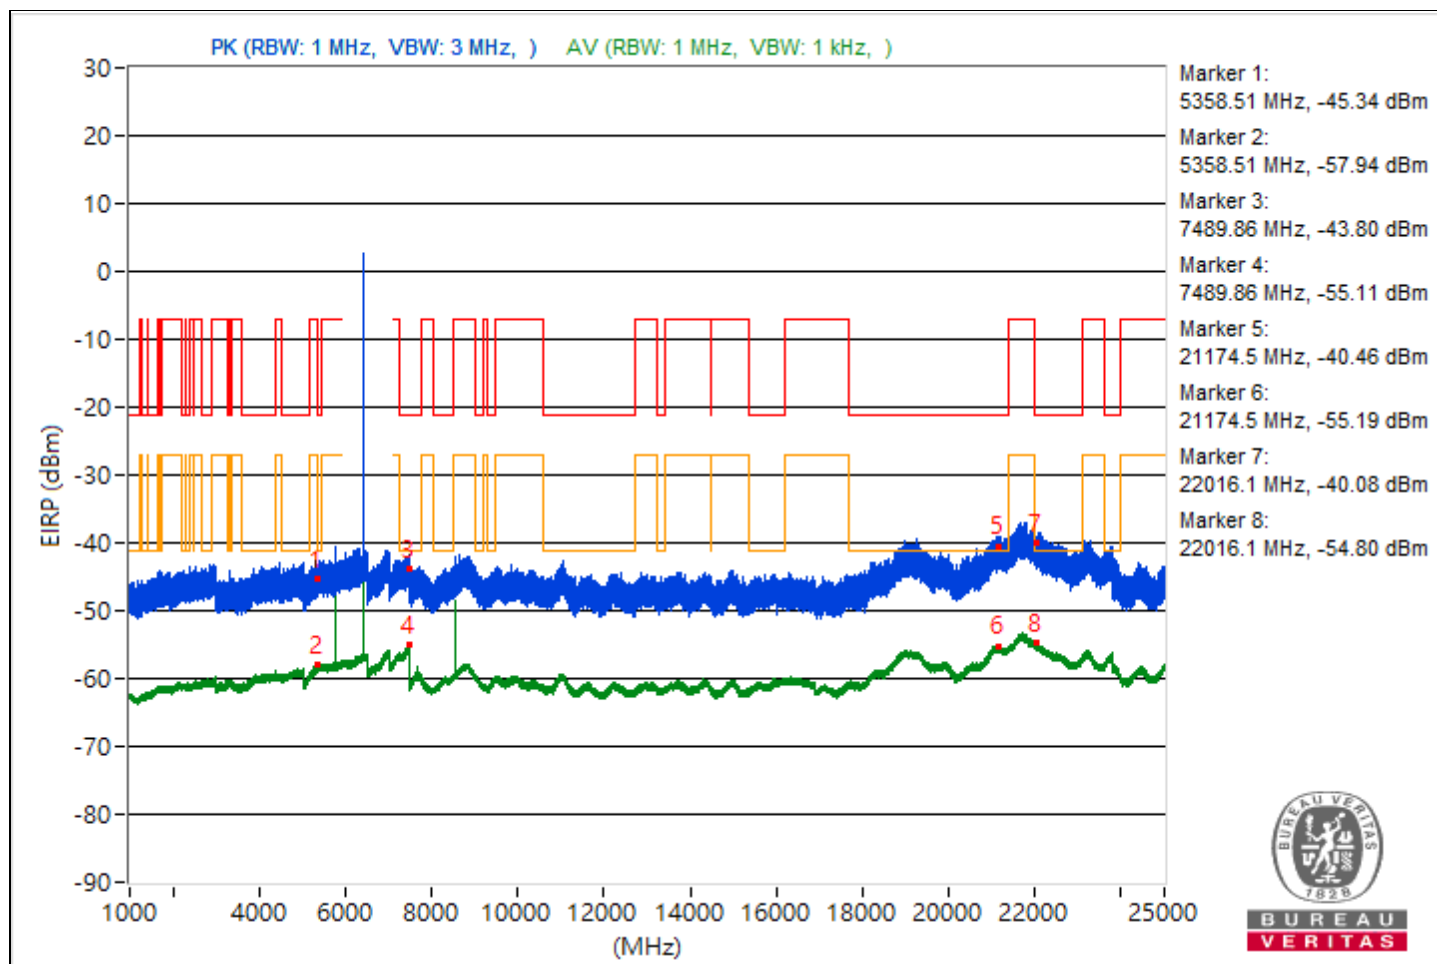


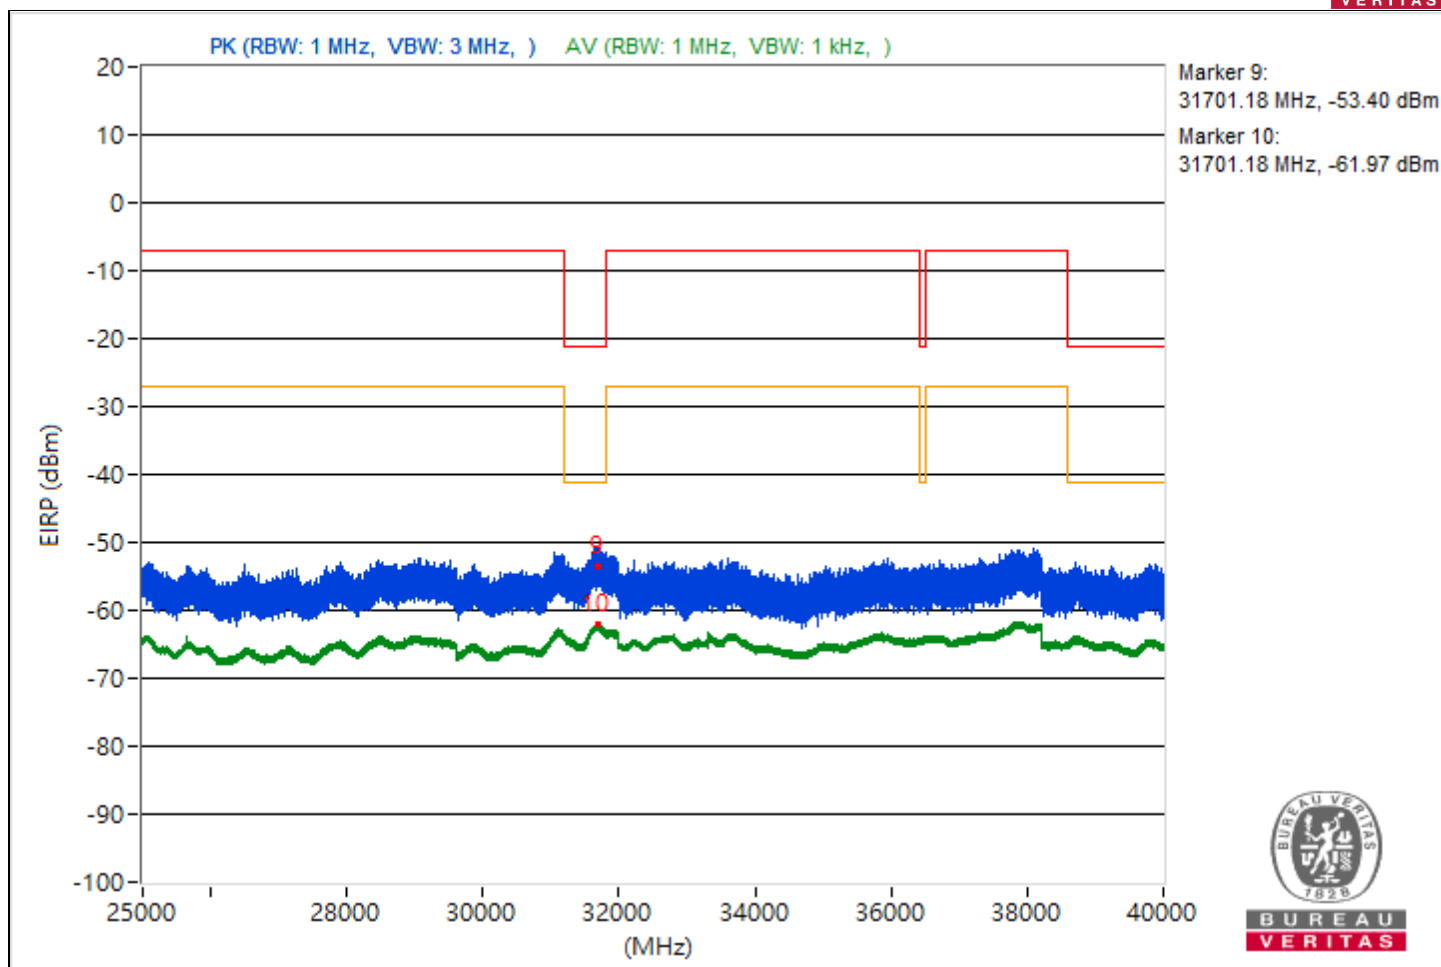


RF Mode	802.11ax (HE20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.08	49.76 PK	74	-24.24	-57.68	-55.87	8.17	-45.5
2	5459.08	37.25 AV	54	-16.75	-68.75	-69.67	8.17	-58.01
3	7484.8	51.83 PK	74	-22.17	-54.07	-55.22	8.17	-43.43
4	7484.8	40.07 AV	54	-13.93	-66.72	-66.04	8.17	-55.19
5	21147.9	53.73 PK	74	-20.27	-52.49	-52.94	8.17	-41.53
6	21147.9	40.19 AV	54	-13.81	-66.4	-66.1	8.17	-55.07
7	22020.5	53.31 PK	74	-20.69	-52.68	-53.64	8.17	-41.95
8	22020.5	40.63 AV	54	-13.37	-65.55	-66.09	8.17	-54.63
9	31689.74	40.39 PK	74	-33.61	-66.3	-65.81	8.17	-54.87
10	31689.74	33.3 AV	54	-20.7	-73.48	-72.82	8.17	-61.96

Note: Margin value = Emission Level - Limit value

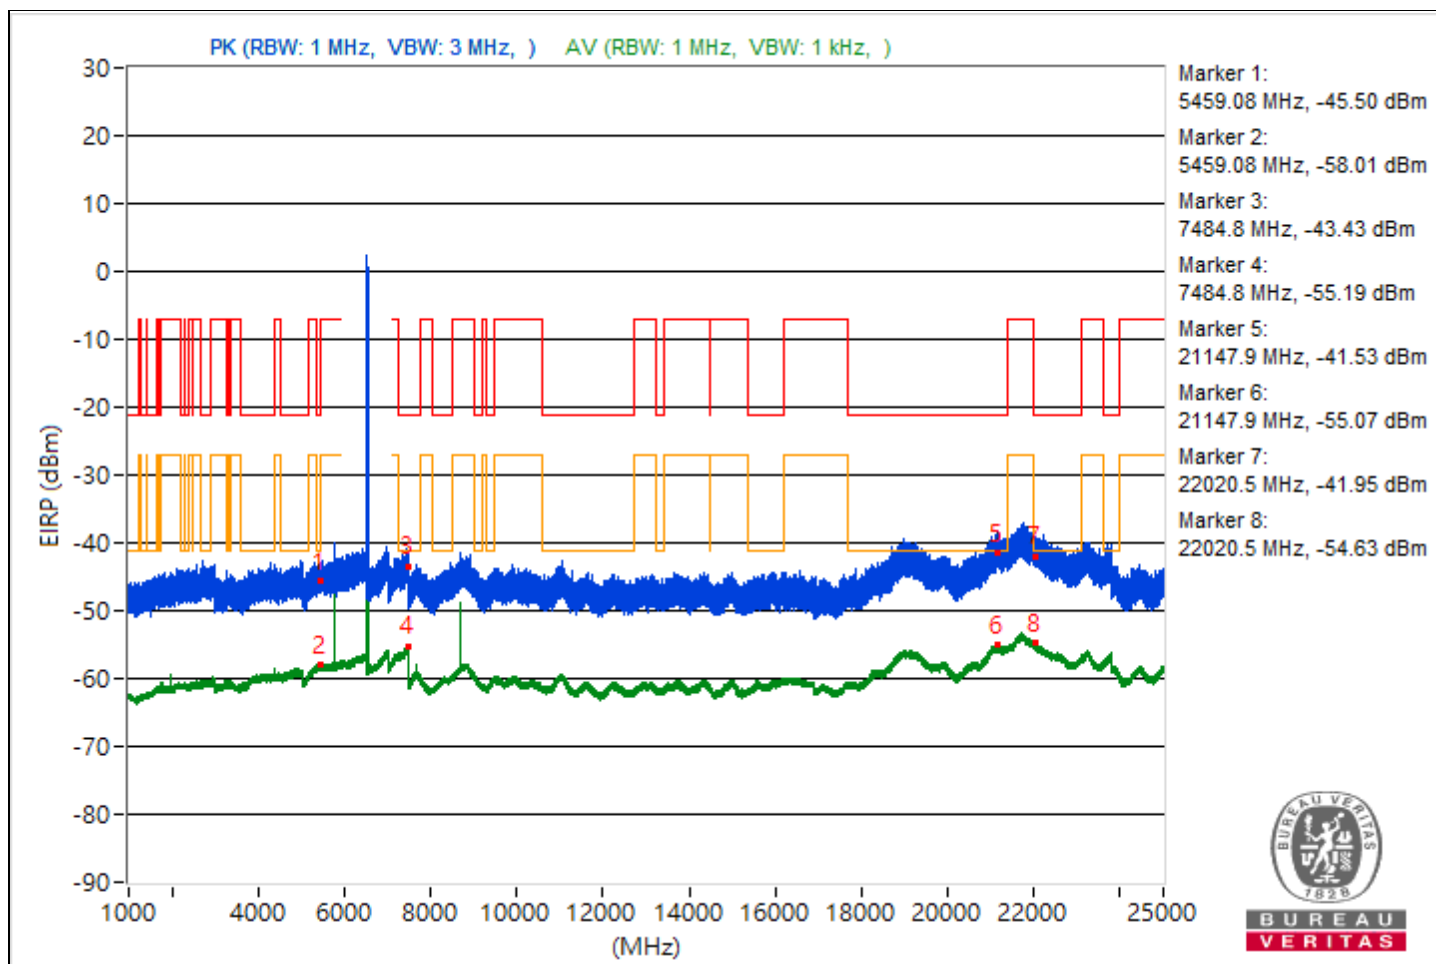


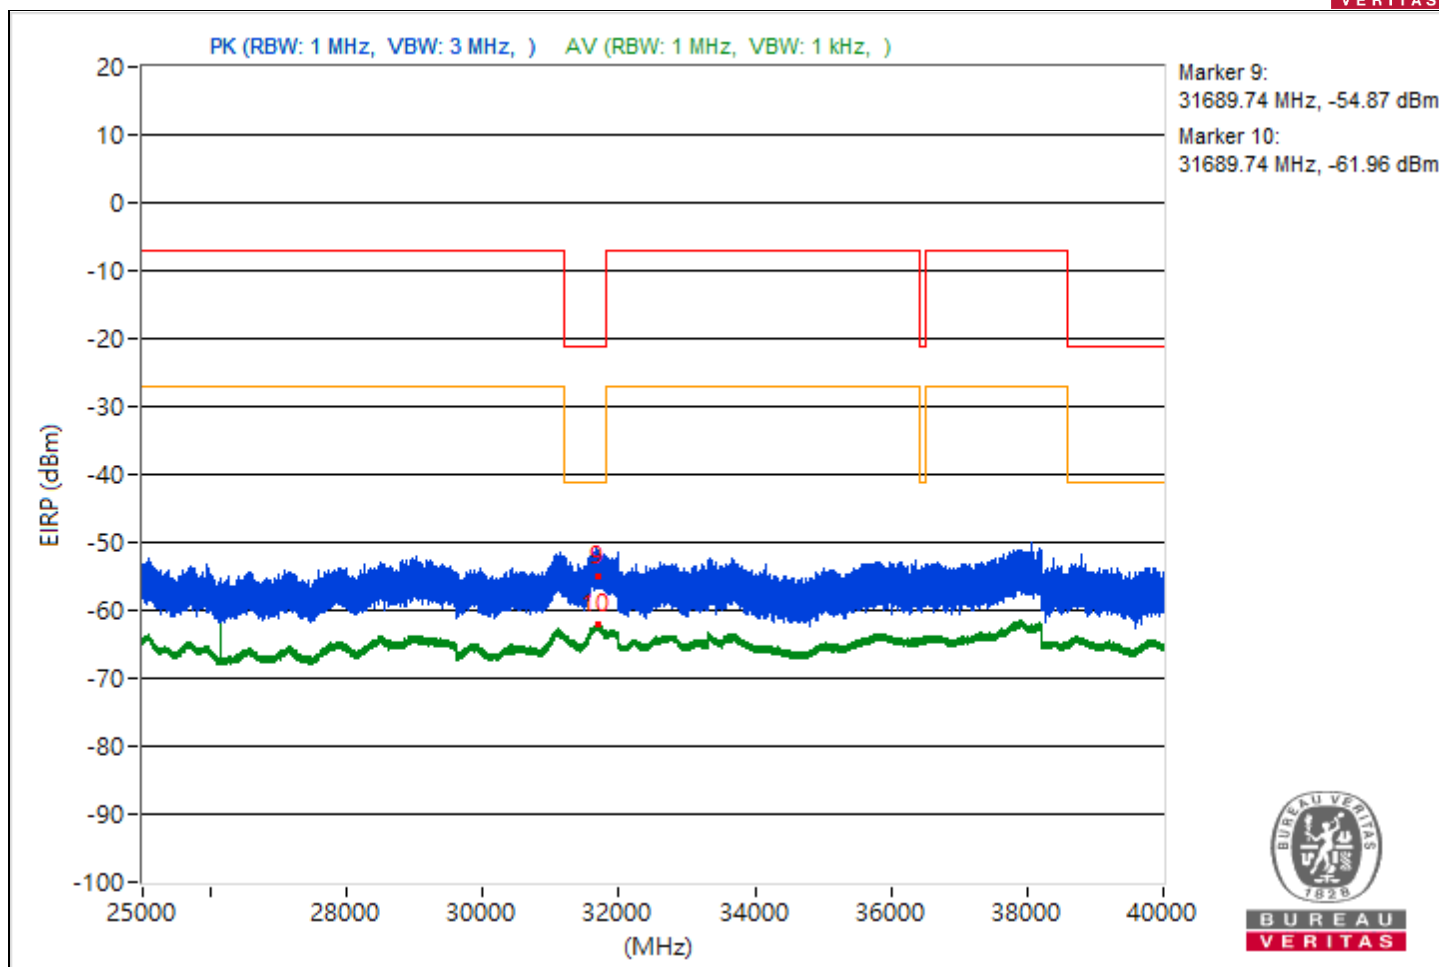


RF Mode	802.11ax (HE20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5374.84	48.83 PK	74	-25.17	-58.13	-57.15	8.17	-46.43
2	5374.84	37.29 AV	54	-16.71	-69.5	-68.82	8.17	-57.97
3	7492.34	52.46 PK	74	-21.54	-53.19	-54.96	8.17	-42.8
4	7492.34	40.07 AV	54	-13.93	-66.61	-66.14	8.17	-55.19
5	21129.1	54.88 PK	74	-19.12	-52.6	-50.72	8.17	-40.38
6	21129.1	40.13 AV	54	-13.87	-66.7	-65.96	8.17	-55.13
7	22021.7	52.73 PK	74	-21.27	-53.35	-54.11	8.17	-42.53
8	22021.7	40.39 AV	54	-13.61	-65.76	-66.36	8.17	-54.87
9	31690.21	41.55 PK	74	-32.45	-65.6	-64.28	8.17	-53.71
10	31690.21	33.33 AV	54	-20.67	-72.92	-73.3	8.17	-61.93

Note: Margin value = Emission Level - Limit value

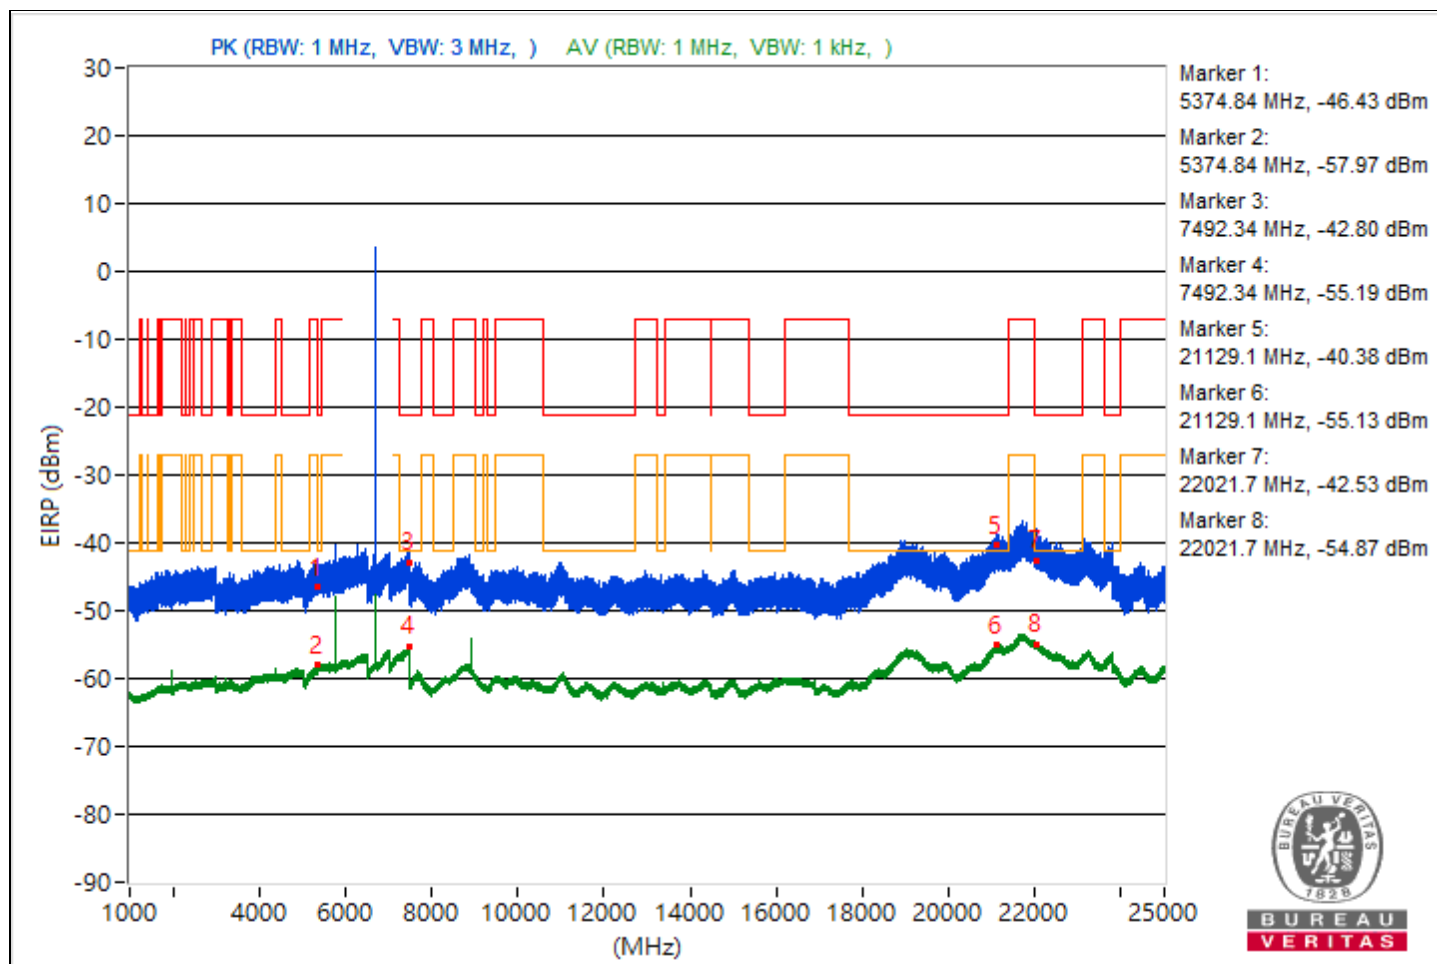


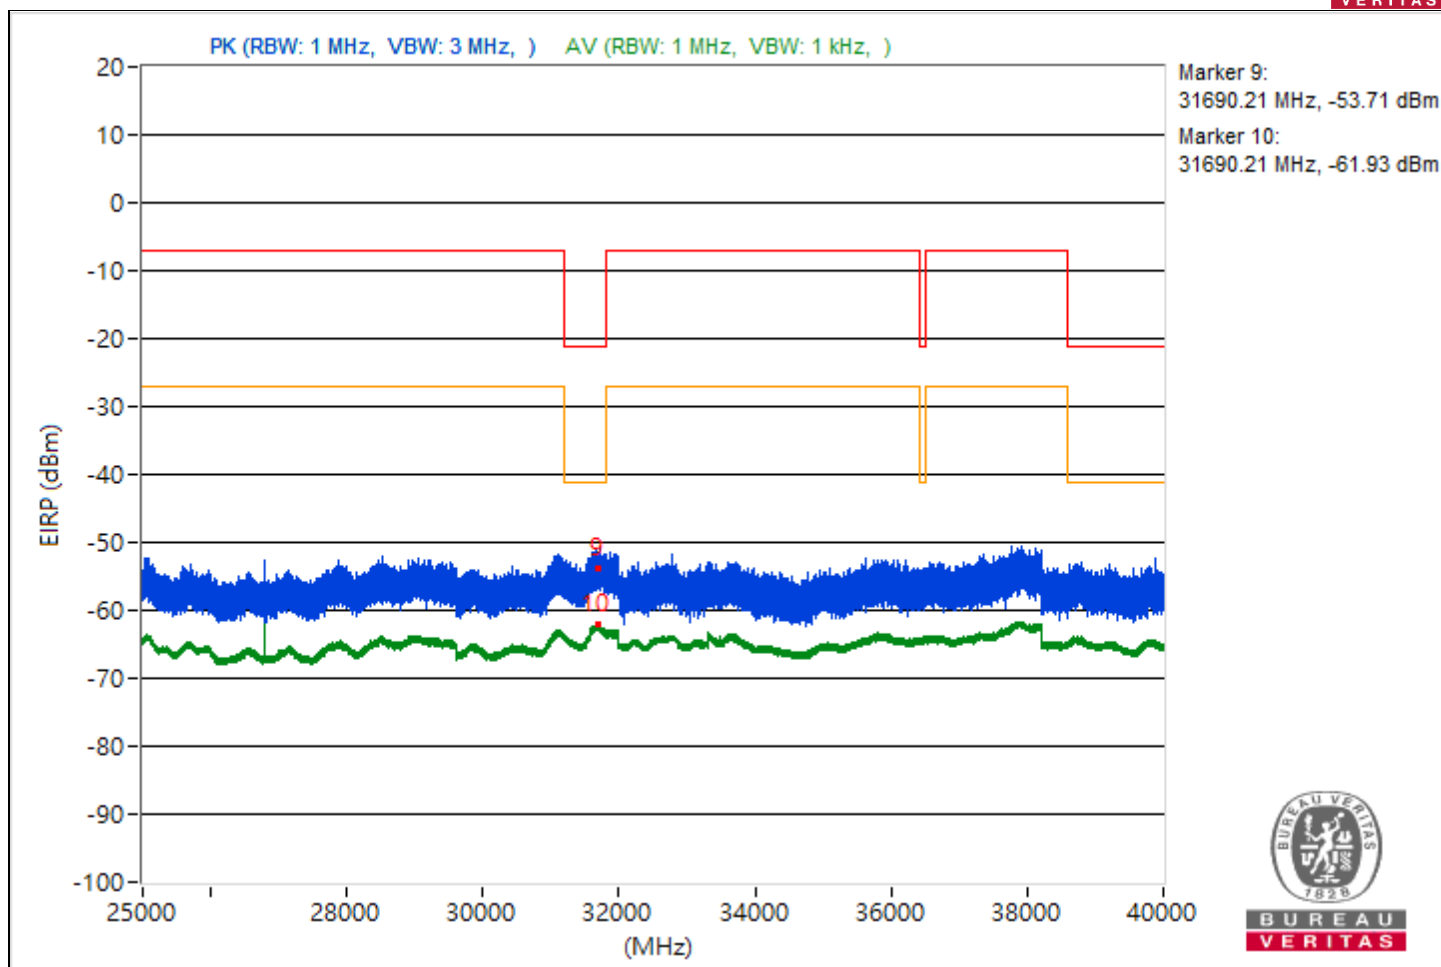


RF Mode	802.11ax (HE20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5442.98	50.65 PK	74	-23.35	-55.98	-55.61	8.17	-44.61
2	5442.98	37.36 AV	54	-16.64	-68.72	-69.48	8.17	-57.9
3	8225.96	55.04 PK	74	-18.96	-49.52	-54.75	8.17	-40.22
4	8225.96	51.83 AV	54	-2.17	-51.91	-63.15	8.17	-43.43
5	21163.3	52.46 PK	74	-21.54	-54.18	-53.79	8.17	-42.8
6	21163.3	39.99 AV	54	-14.01	-66.81	-66.11	8.17	-55.27
7	22024.1	52.73 PK	74	-21.27	-54.5	-53.05	8.17	-42.53
8	22024.1	40.33 AV	54	-13.67	-66.51	-65.74	8.17	-54.93
9	31683.76	40.46 PK	74	-33.54	-65.88	-66.08	8.17	-54.8
10	31683.76	33.24 AV	54	-20.76	-73.46	-72.96	8.17	-62.02

Note: Margin value = Emission Level - Limit value

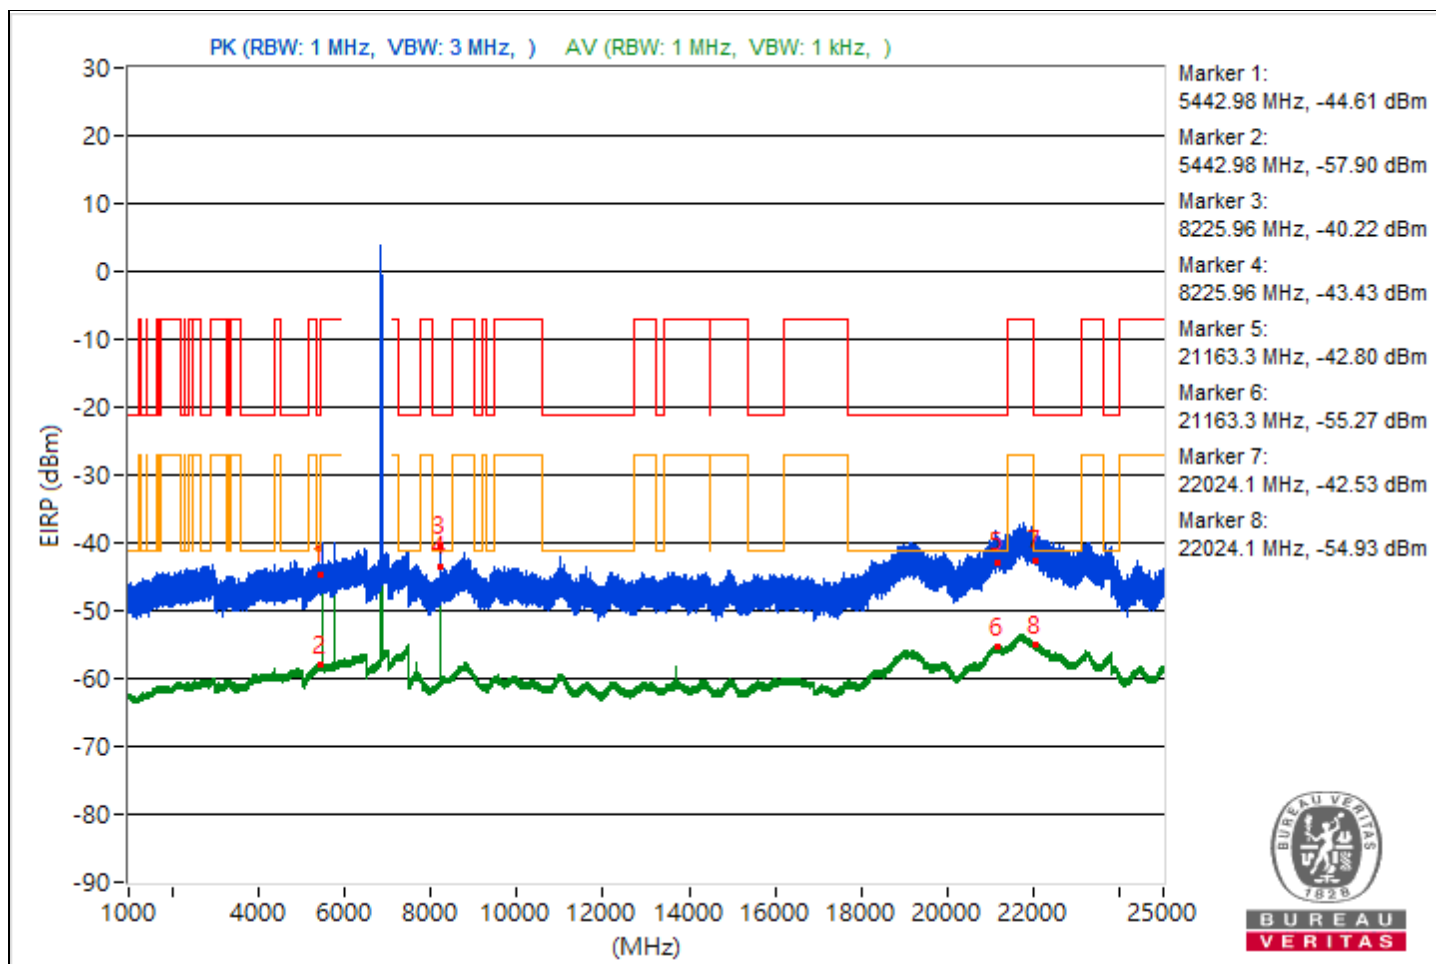


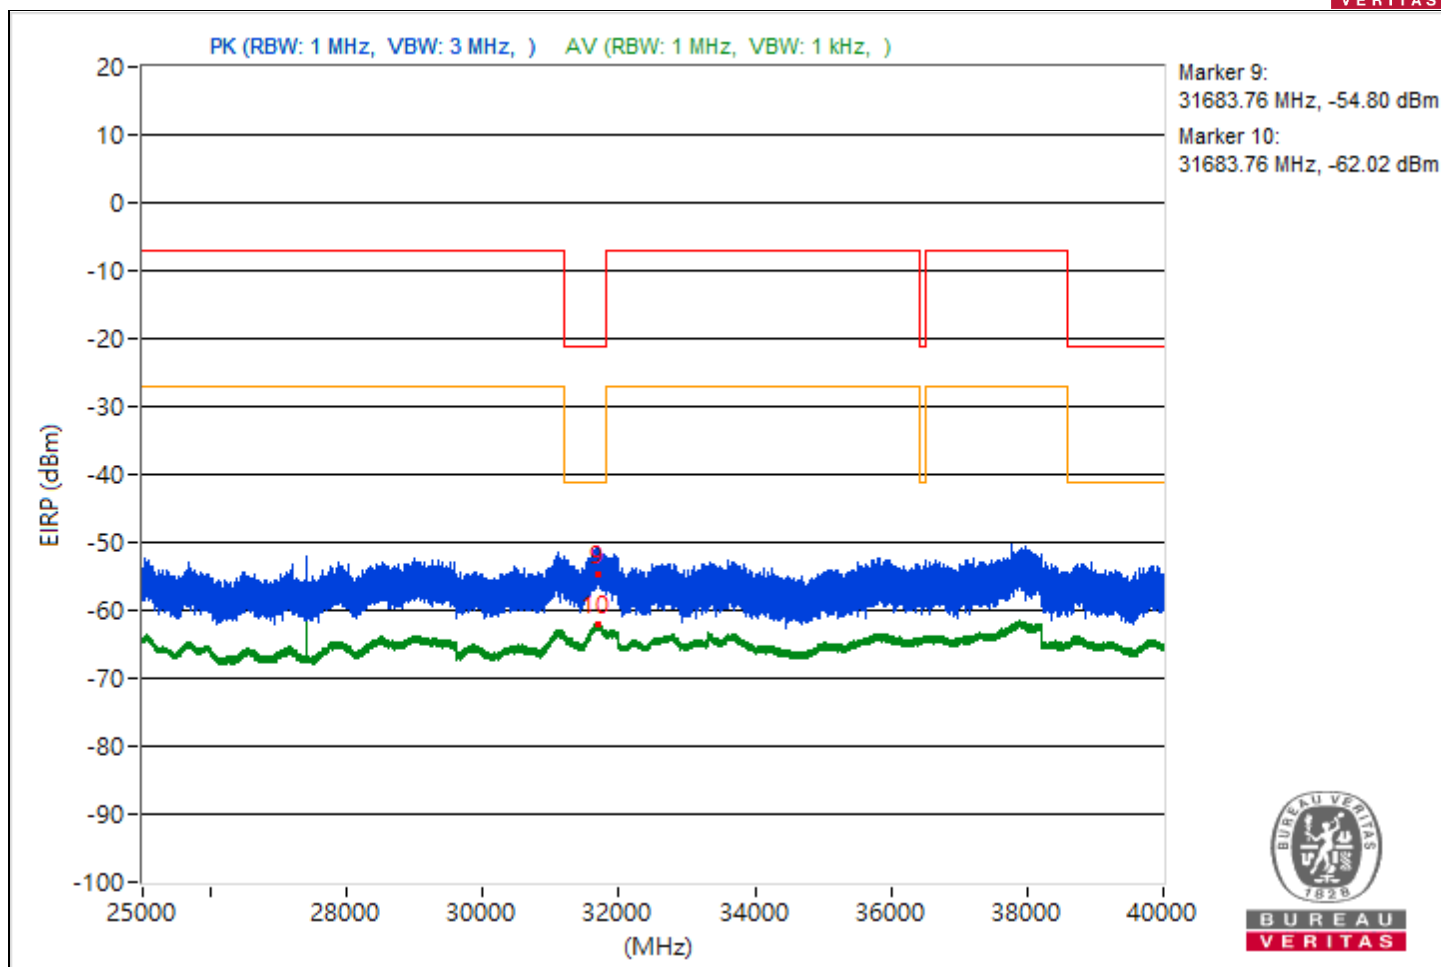


RF Mode	802.11ax (HE40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5377.18	50.52 PK	74	-23.48	-57.18	-54.95	8.17	-44.74
2	5377.18	37.41 AV	54	-16.59	-69.22	-68.85	8.17	-57.85
3	7489	51.56 PK	74	-22.44	-54.52	-55.27	8.17	-43.7
4	7489	40.21 AV	54	-13.79	-66	-66.47	8.17	-55.05
5	21188.2	53.06 PK	74	-20.94	-54.18	-52.71	8.17	-42.2
6	21188.2	40.06 AV	54	-13.94	-66.75	-66.04	8.17	-55.2
7	22015.3	54.81 PK	74	-19.19	-50.78	-52.69	8.17	-40.45
8	22015.3	40.48 AV	54	-13.52	-66.06	-65.86	8.17	-54.78
9	31711.91	43.07 PK	74	-30.93	-62.49	-64.46	8.17	-52.19
10	31711.91	33.21 AV	54	-20.79	-72.93	-73.55	8.17	-62.05

Note: Margin value = Emission Level - Limit value

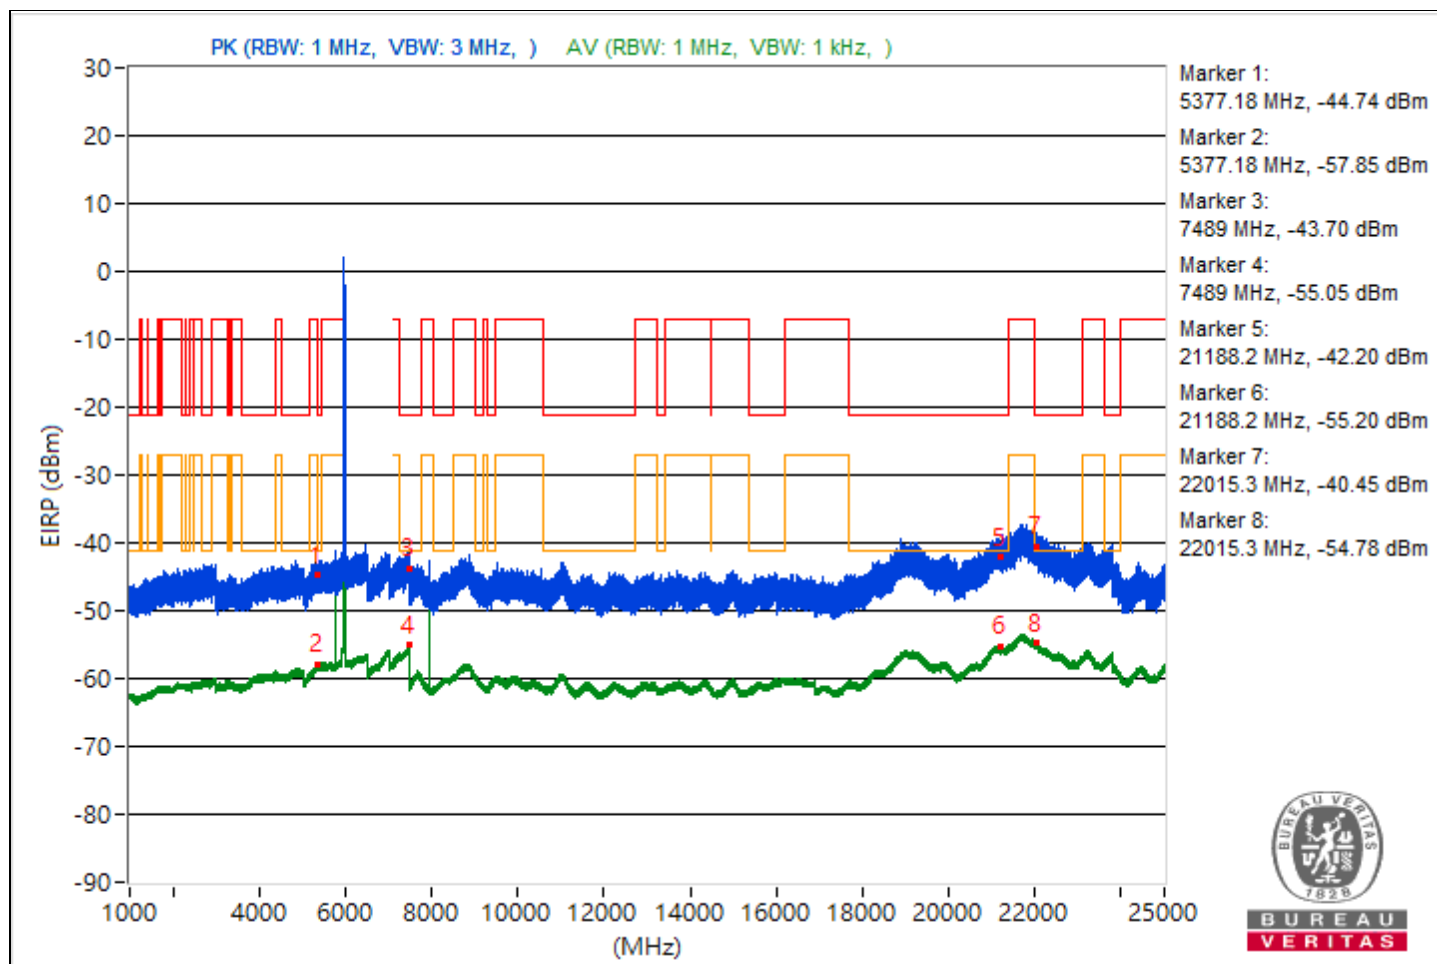


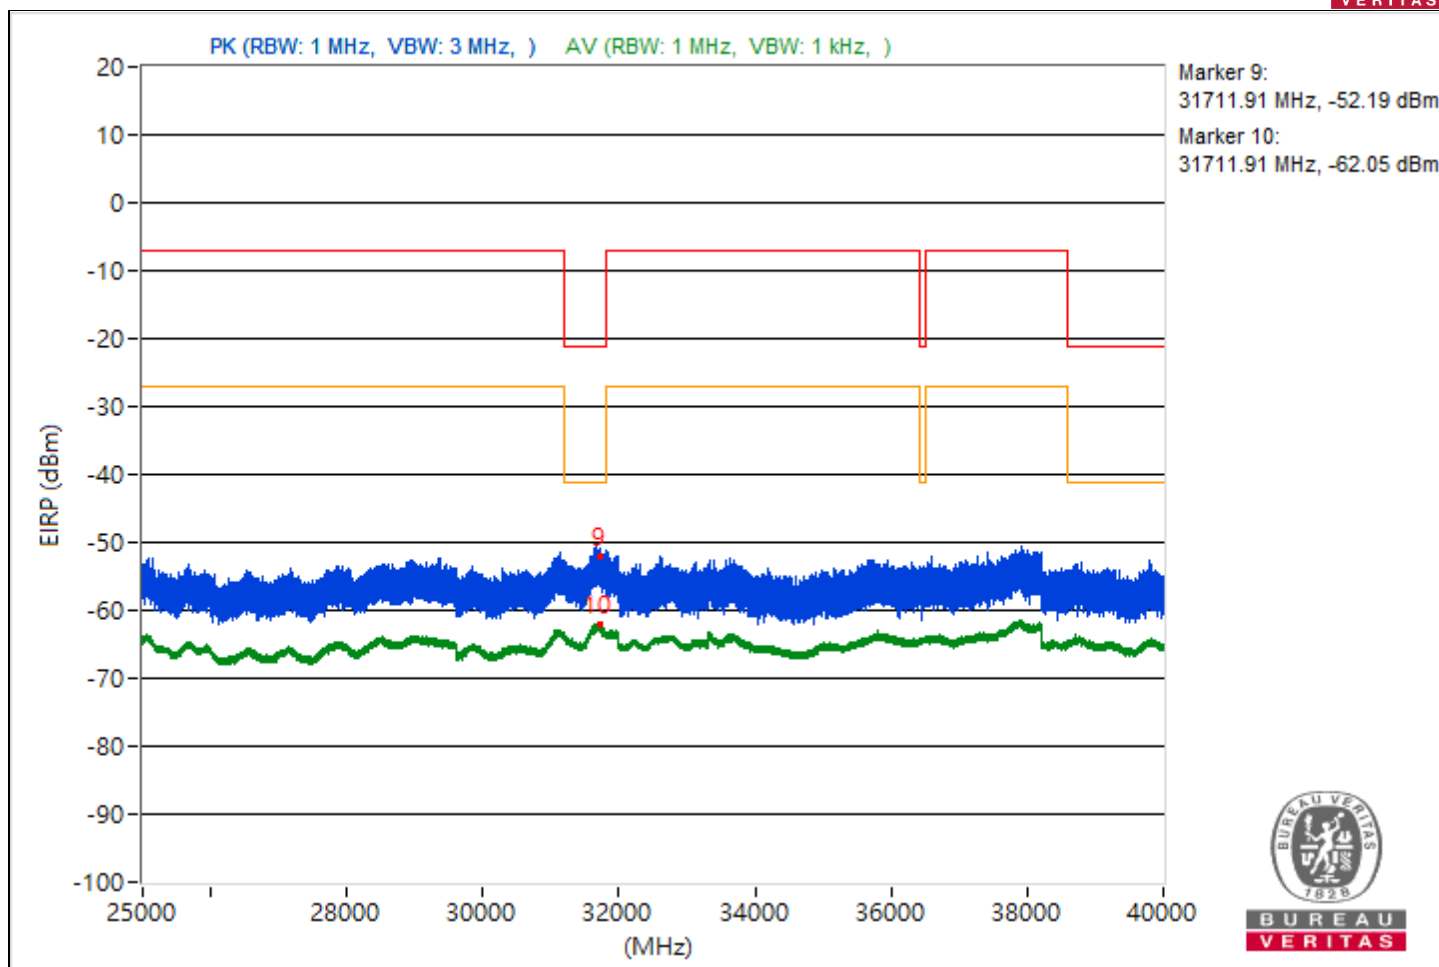


RF Mode	802.11ax (HE40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5422.13	50.61 PK	74	-23.39	-56.18	-55.51	8.17	-44.65
2	5422.13	37.76 AV	54	-16.24	-67.98	-69.53	8.17	-57.5
3	8219.91	53.66 PK	74	-20.34	-51.26	-55.14	8.17	-41.6
4	8219.91	47.72 AV	54	-6.28	-56.81	-62.21	8.17	-47.54
5	21116.5	54.09 PK	74	-19.91	-52.15	-52.56	8.17	-41.17
6	21116.5	40.03 AV	54	-13.97	-65.98	-66.88	8.17	-55.23
7	22015	53.67 PK	74	-20.33	-53.92	-51.87	8.17	-41.59
8	22015	40.61 AV	54	-13.39	-65.77	-65.89	8.17	-54.65
9	31689.67	40.85 PK	74	-33.15	-65.35	-65.83	8.17	-54.41
10	31689.67	33.31 AV	54	-20.69	-73.01	-73.24	8.17	-61.95

Note: Margin value = Emission Level - Limit value

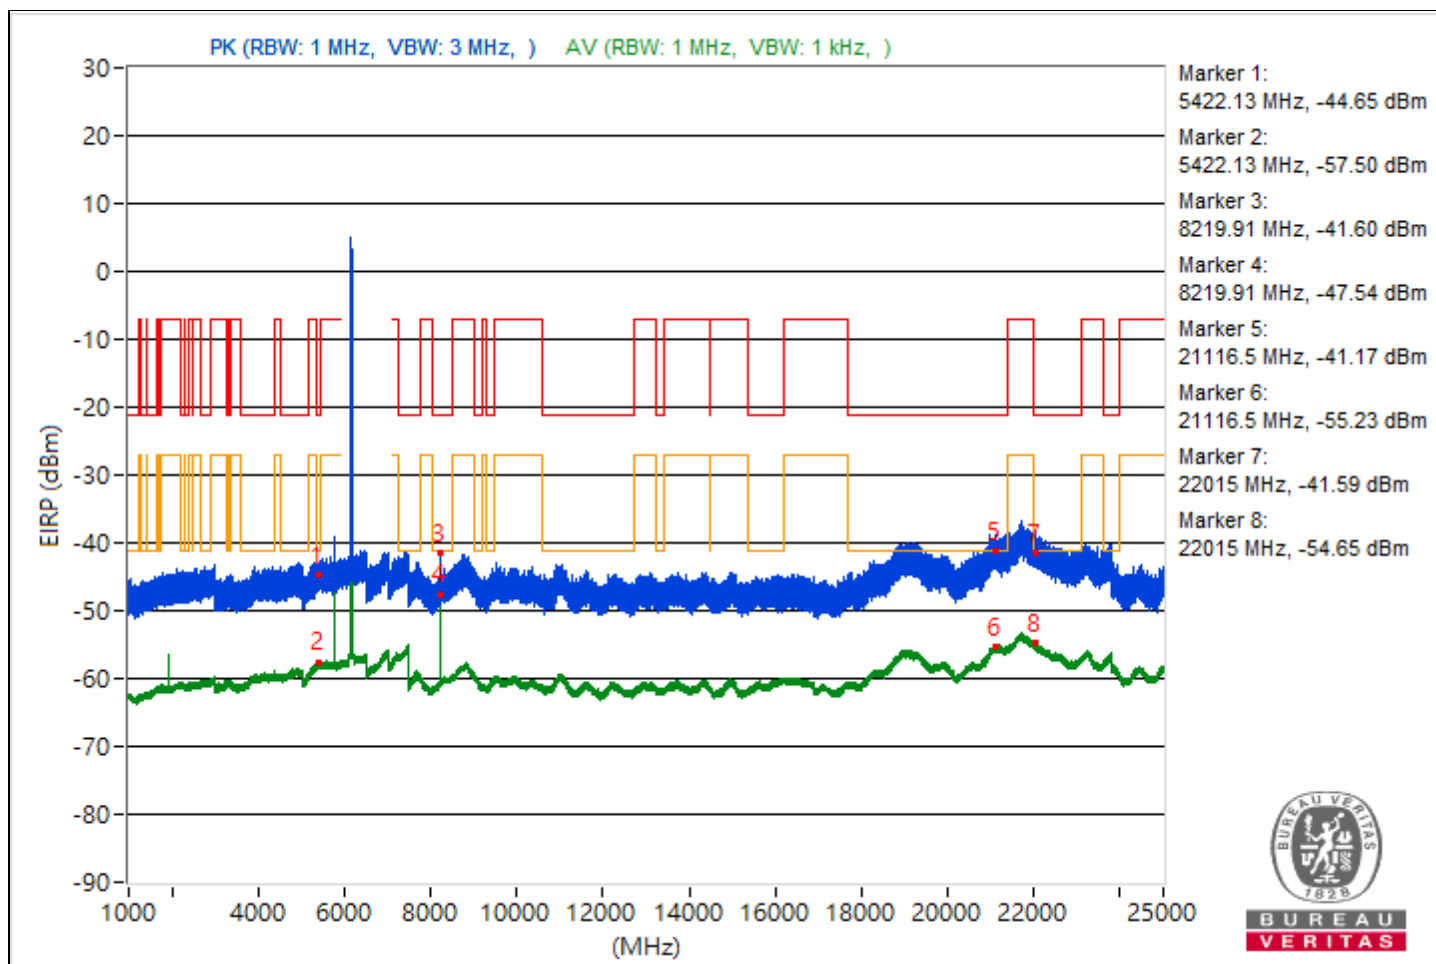

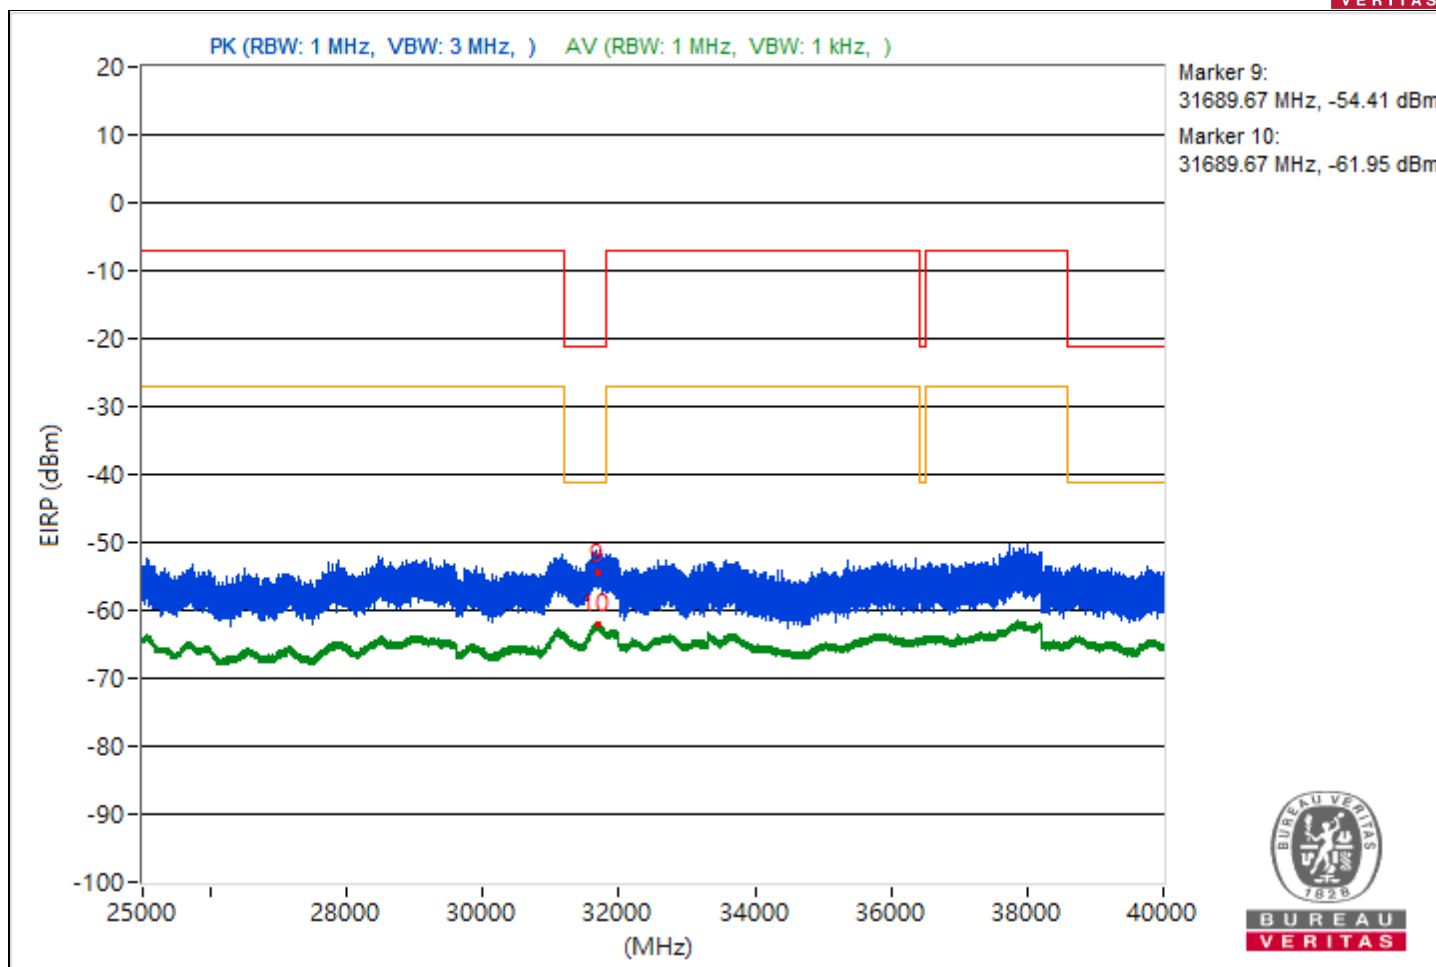



RF Mode	802.11ax (HE40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5759.92	56.02 PK	88.26	-32.24	-53.32	-48.7	8.17	-39.24
2	#5759.92	52.02 AV	68.26	-16.24	-59.3	-52.18	8.17	-43.24
3	7487.6	53.51 PK	74	-20.49	-54.6	-51.73	8.17	-41.75
4	7487.6	40.07 AV	54	-13.93	-65.97	-66.8	8.17	-55.19
5	21104.4	53.55 PK	74	-20.45	-54.64	-51.65	8.17	-41.71
6	21104.4	39.93 AV	54	-14.07	-66.98	-66.09	8.17	-55.33
7	22021	54.26 PK	74	-19.74	-52.68	-51.73	8.17	-41
8	22021	40.27 AV	54	-13.73	-66.69	-65.71	8.17	-54.99
9	31705.77	42.52 PK	74	-31.48	-63.64	-64.23	8.17	-52.74
10	31705.77	33.32 AV	54	-20.68	-73.44	-72.82	8.17	-61.94

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

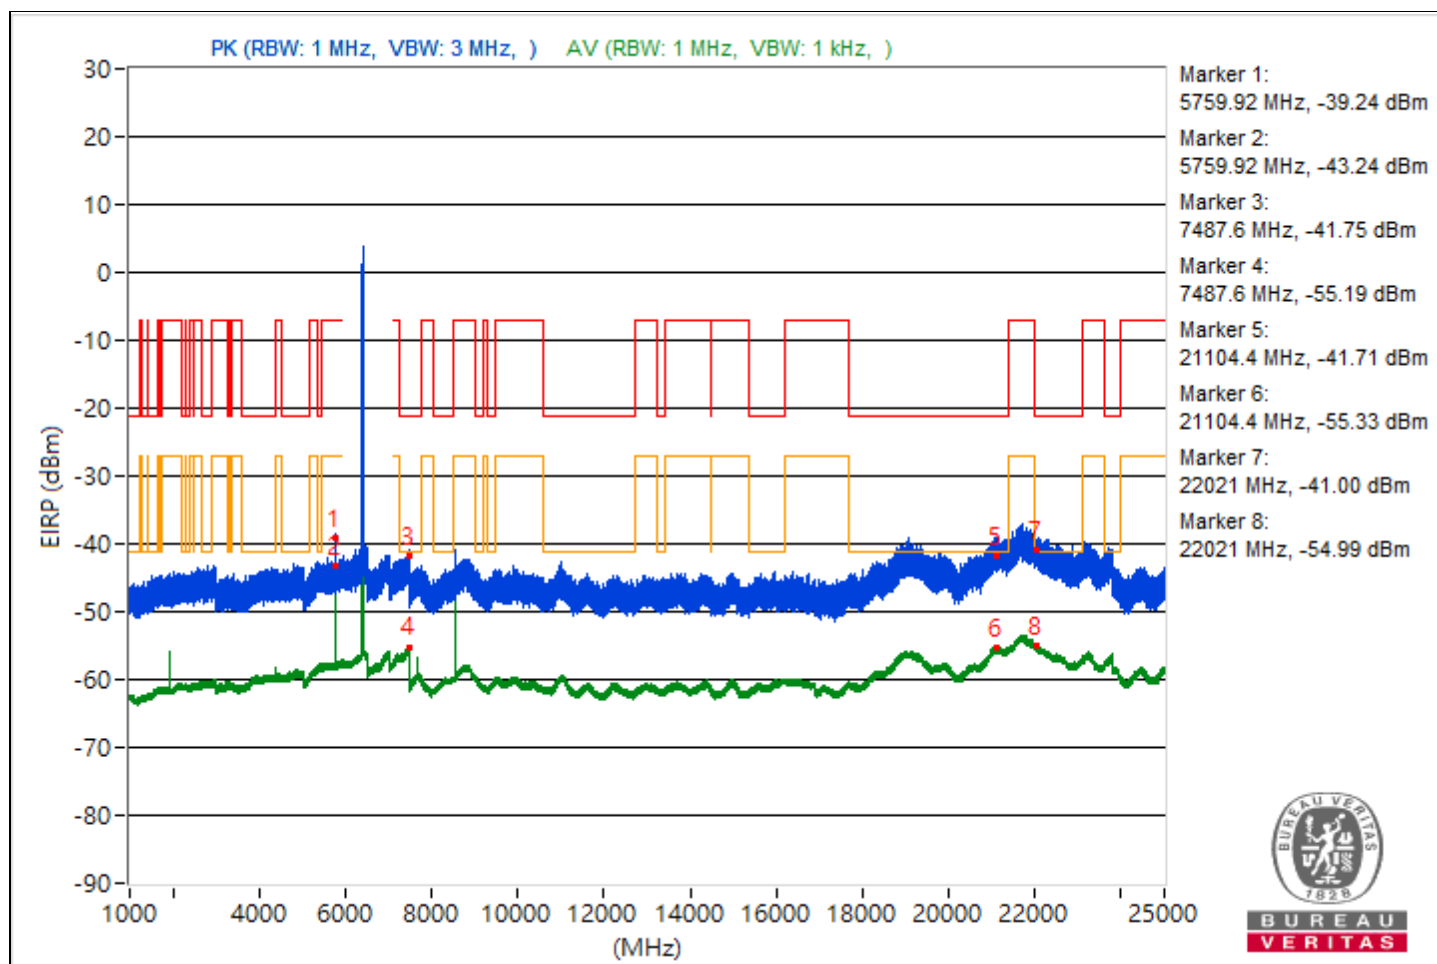

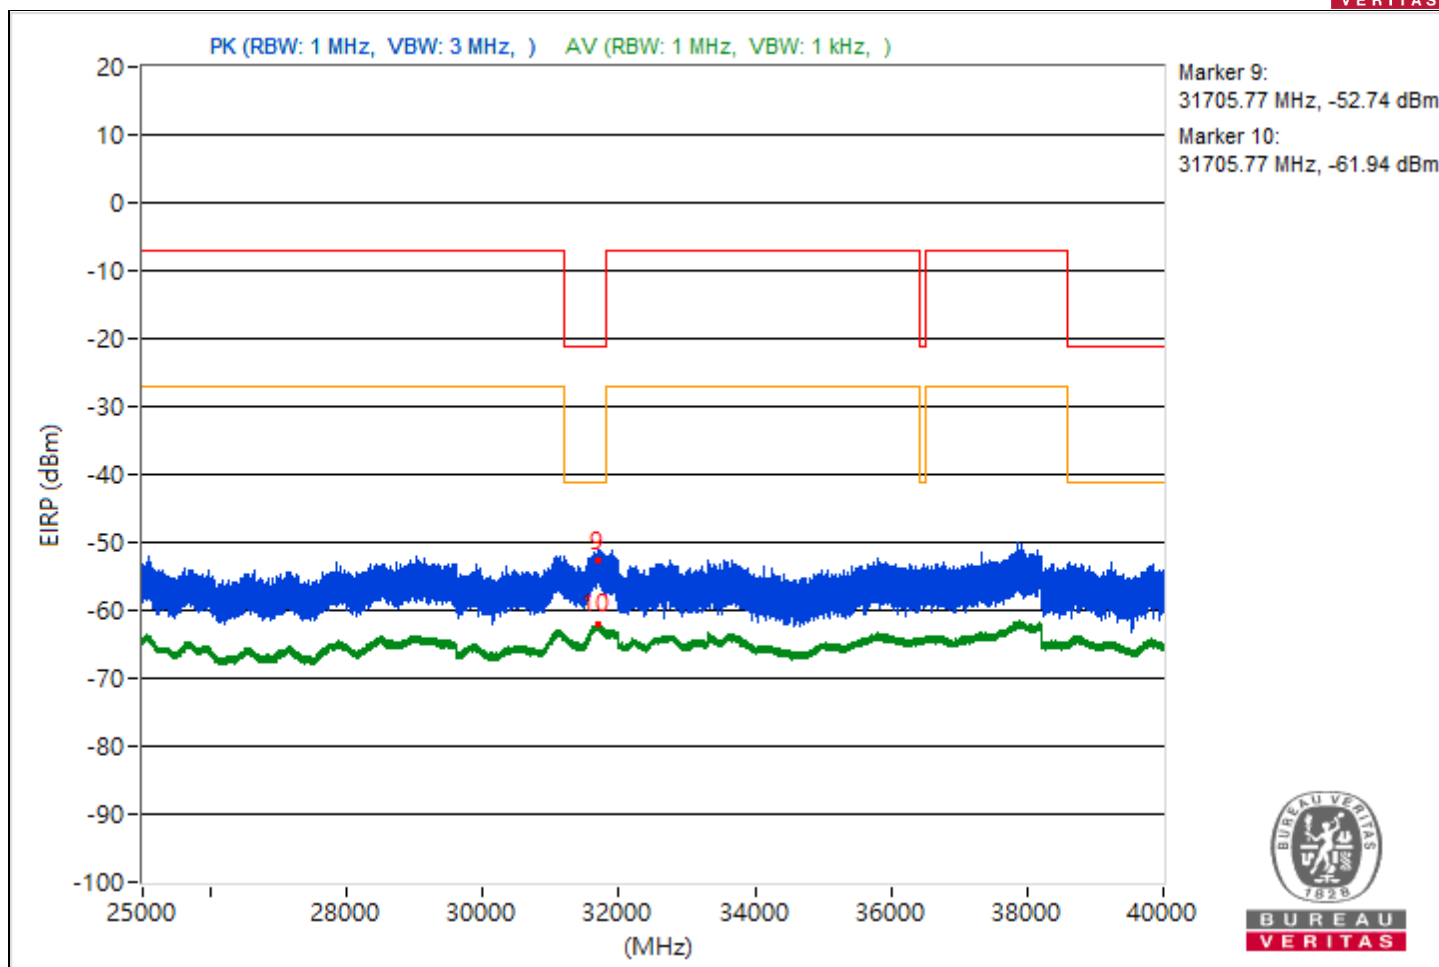



RF Mode	802.11ax (HE40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5760	57.45 PK	88.26	-30.81	-50.24	-48.03	8.17	-37.81
2	#5760	52.78 AV	68.26	-15.48	-58.54	-51.41	8.17	-42.48
3	7487.13	52.37 PK	74	-21.63	-53.27	-55.06	8.17	-42.89
4	7487.13	40.55 AV	54	-13.45	-65.68	-66.11	8.17	-54.71
5	21175.8	53.87 PK	74	-20.13	-53.81	-51.6	8.17	-41.39
6	21175.8	39.95 AV	54	-14.05	-66.98	-66.05	8.17	-55.31
7	22048.6	54.08 PK	74	-19.92	-52.78	-51.97	8.17	-41.18
8	22048.6	40.5 AV	54	-13.5	-66.21	-65.68	8.17	-54.76
9	31694.64	41.81 PK	74	-32.19	-63.71	-65.79	8.17	-53.45
10	31694.64	33.34 AV	54	-20.66	-72.94	-73.25	8.17	-61.92

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

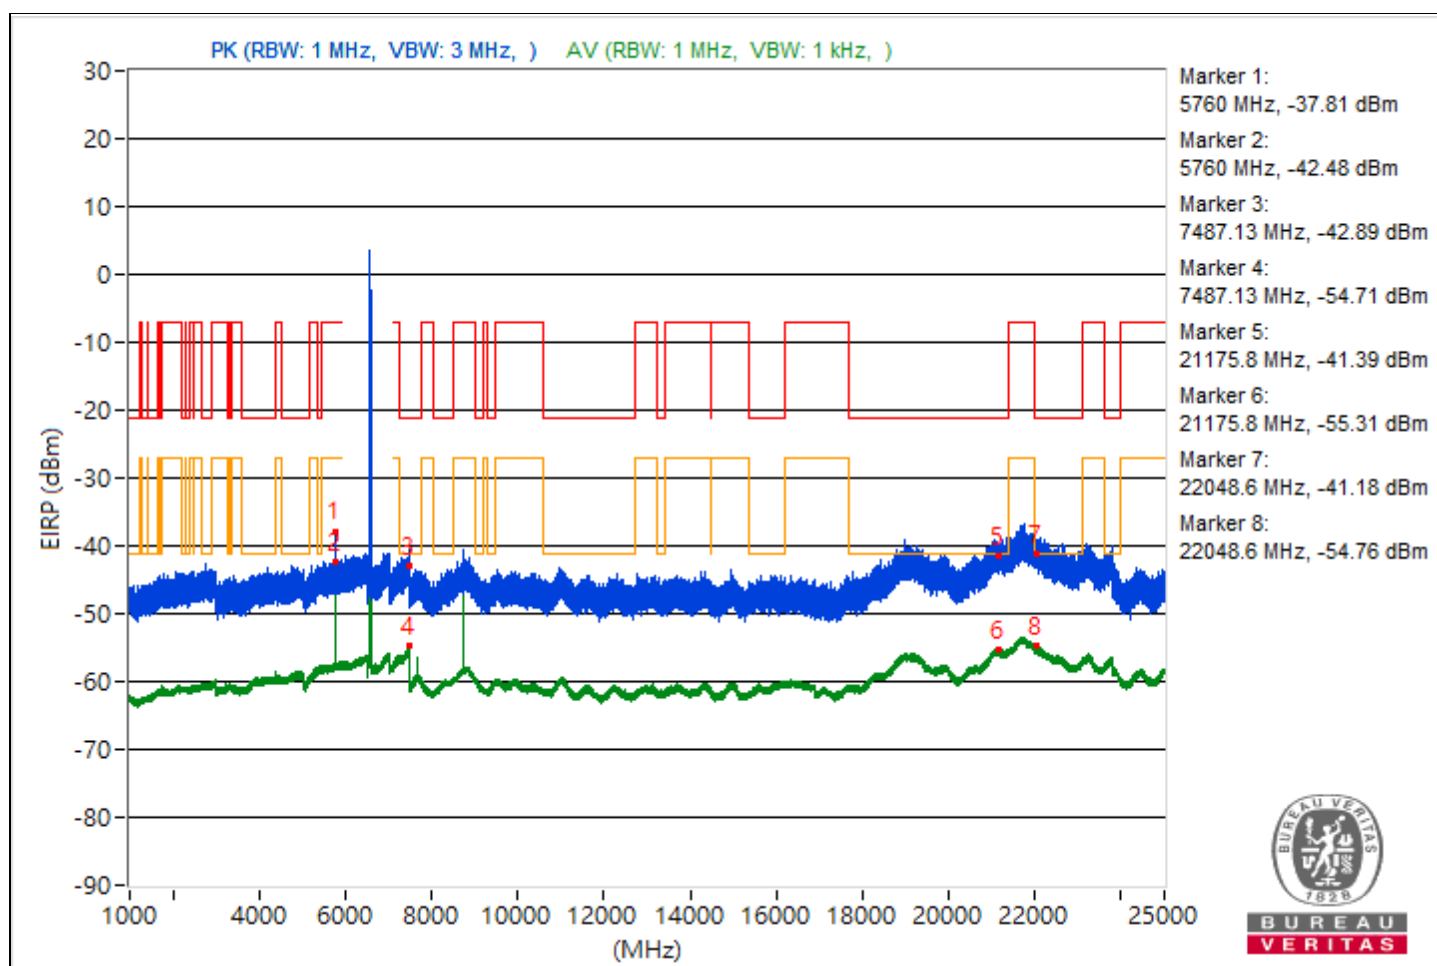

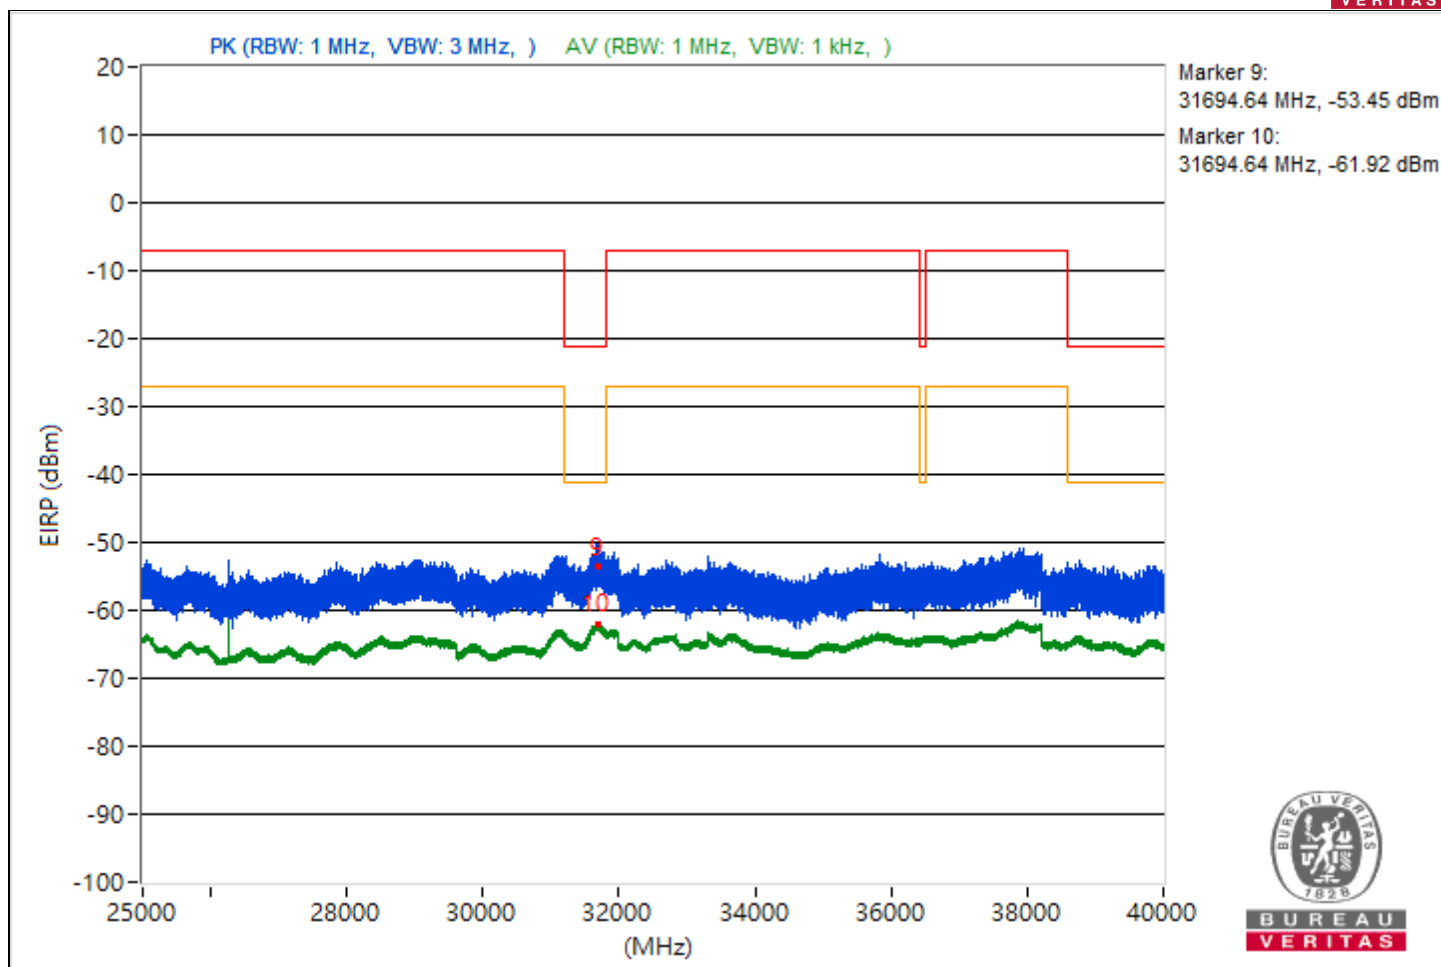



RF Mode	802.11ax (HE40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5759.92	56.66 PK	88.26	-31.6	-52.05	-48.3	8.17	-38.6
2	#5759.92	52.48 AV	68.26	-15.78	-58.21	-51.85	8.17	-42.78
3	7496.86	51.26 PK	74	-22.74	-55.97	-54.52	8.17	-44
4	7496.86	40.25 AV	54	-13.75	-66.07	-66.32	8.17	-55.01
5	21367.9	52.29 PK	74	-21.71	-53.33	-55.17	8.17	-42.97
6	21367.9	40.04 AV	54	-13.96	-66.14	-66.68	8.17	-55.22
7	22033.7	53.35 PK	74	-20.65	-53.15	-53.02	8.17	-41.91
8	22033.7	40.45 AV	54	-13.55	-66.19	-65.79	8.17	-54.81
9	31715.33	41.15 PK	74	-32.85	-65.19	-65.39	8.17	-54.11
10	31715.33	33.15 AV	54	-20.85	-72.98	-73.62	8.17	-62.11

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

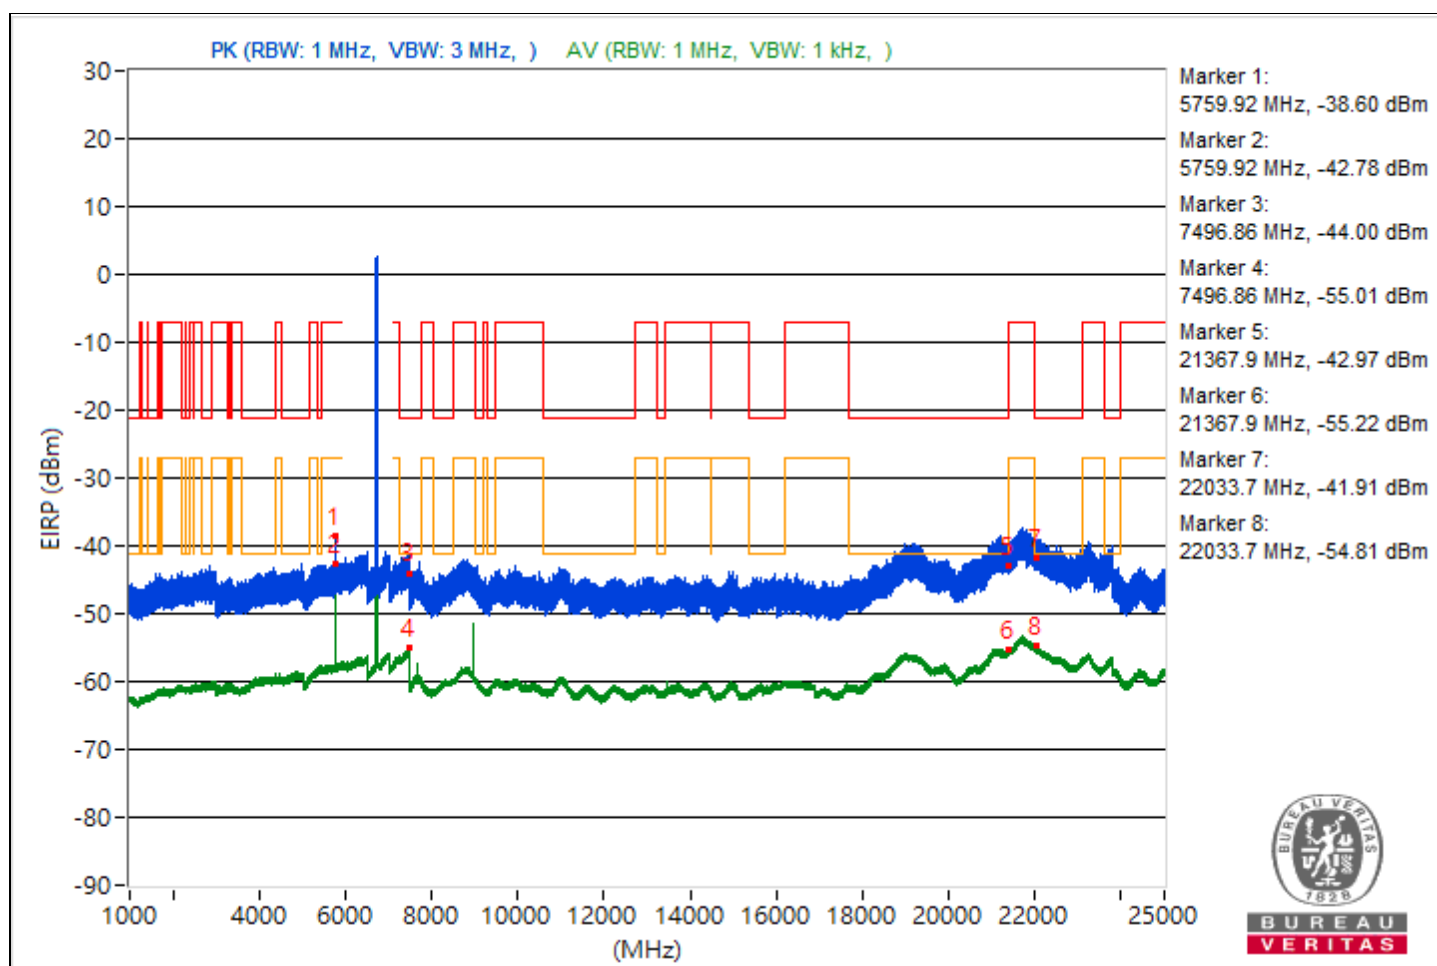

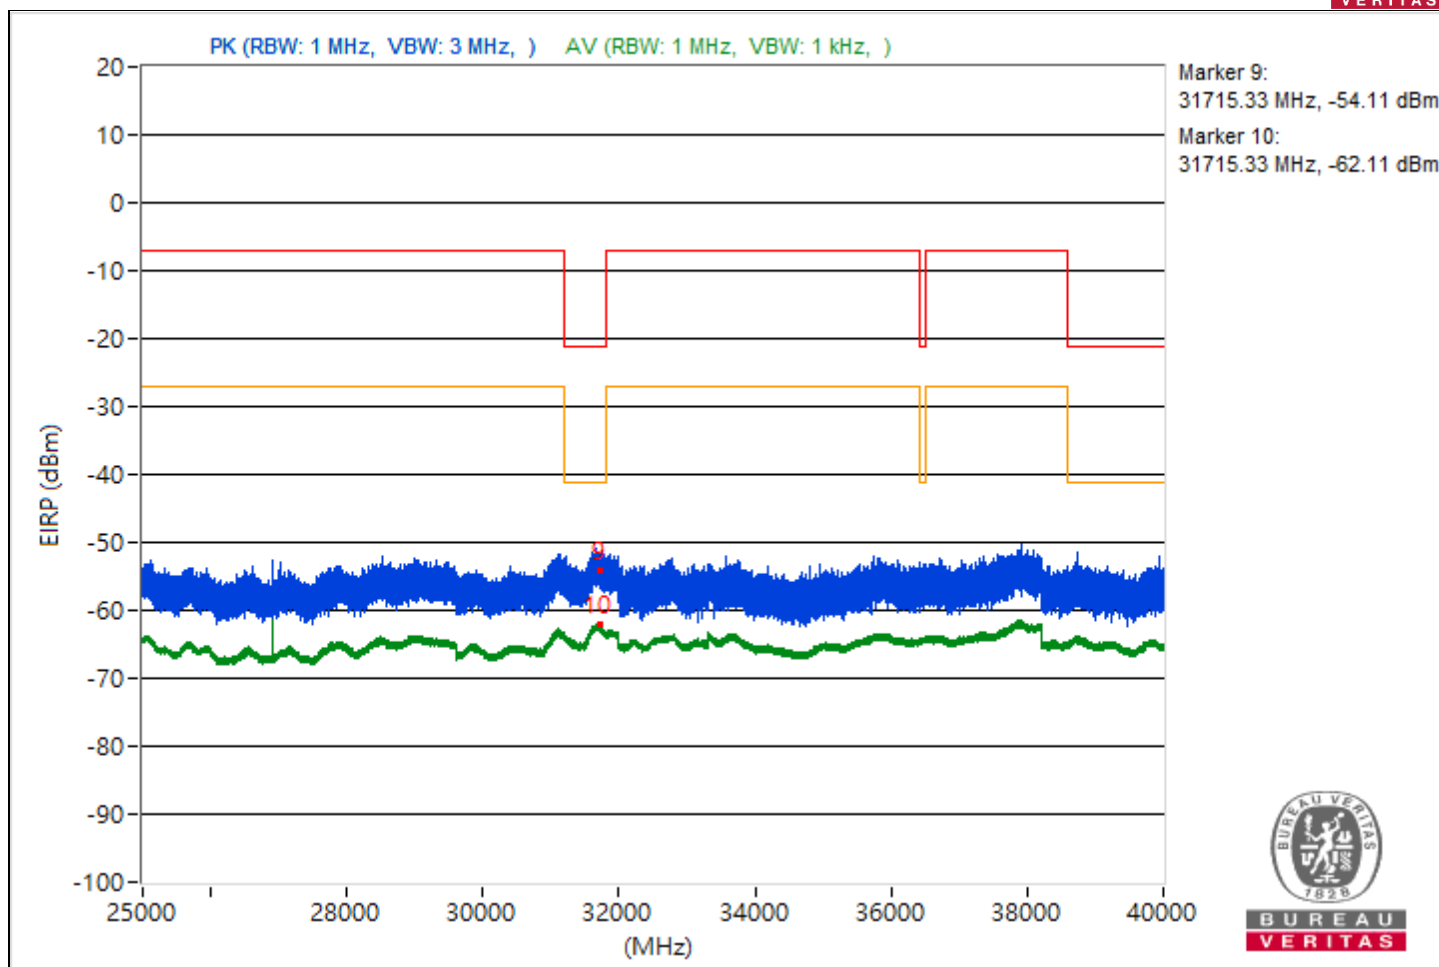



RF Mode	802.11ax (HE40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5760	57.19 PK	88.26	-31.07	-50.46	-48.3	8.17	-38.07
2	#5760	53.57 AV	68.26	-14.69	-55.82	-51.13	8.17	-41.69
3	9126.67	51.01 PK	74	-22.99	-53.55	-58.8	8.17	-44.25
4	9126.67	43.78 AV	54	-10.22	-59.9	-72.09	8.17	-51.48
5	21379.2	53.45 PK	74	-20.55	-54.04	-52.14	8.17	-41.81
6	21379.2	40.04 AV	54	-13.96	-66.07	-66.77	8.17	-55.22
7	22012.4	52.9 PK	74	-21.1	-53.75	-53.35	8.17	-42.36
8	22012.4	40.32 AV	54	-13.68	-65.7	-66.58	8.17	-54.94
9	31700.01	39.82 PK	74	-34.18	-66.72	-66.52	8.17	-55.44
10	31700.01	33.42 AV	54	-20.58	-73.25	-72.8	8.17	-61.84

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

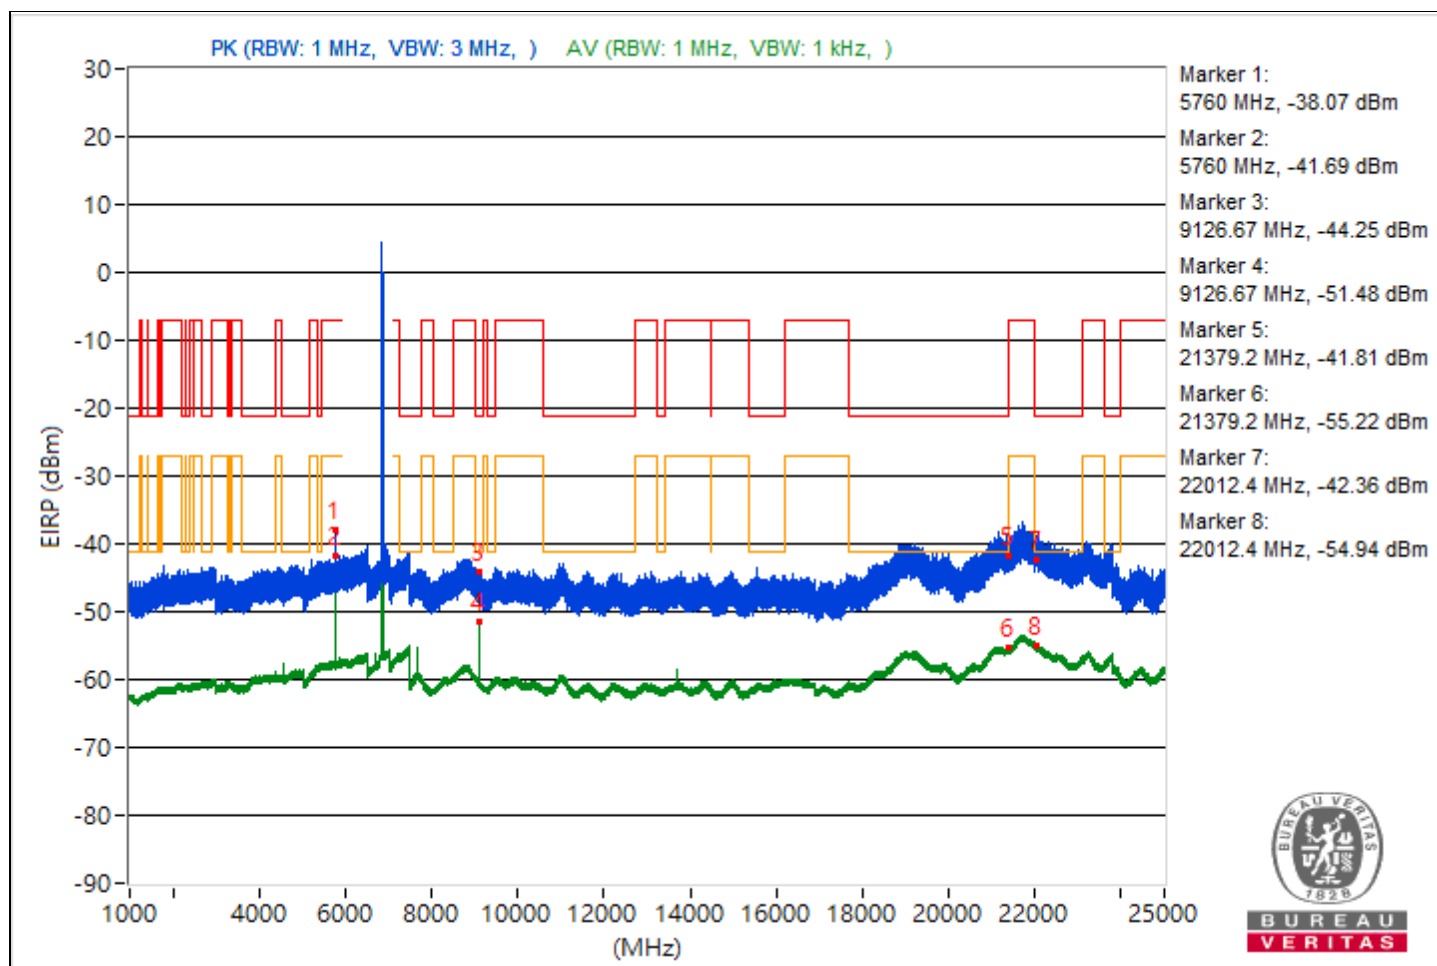

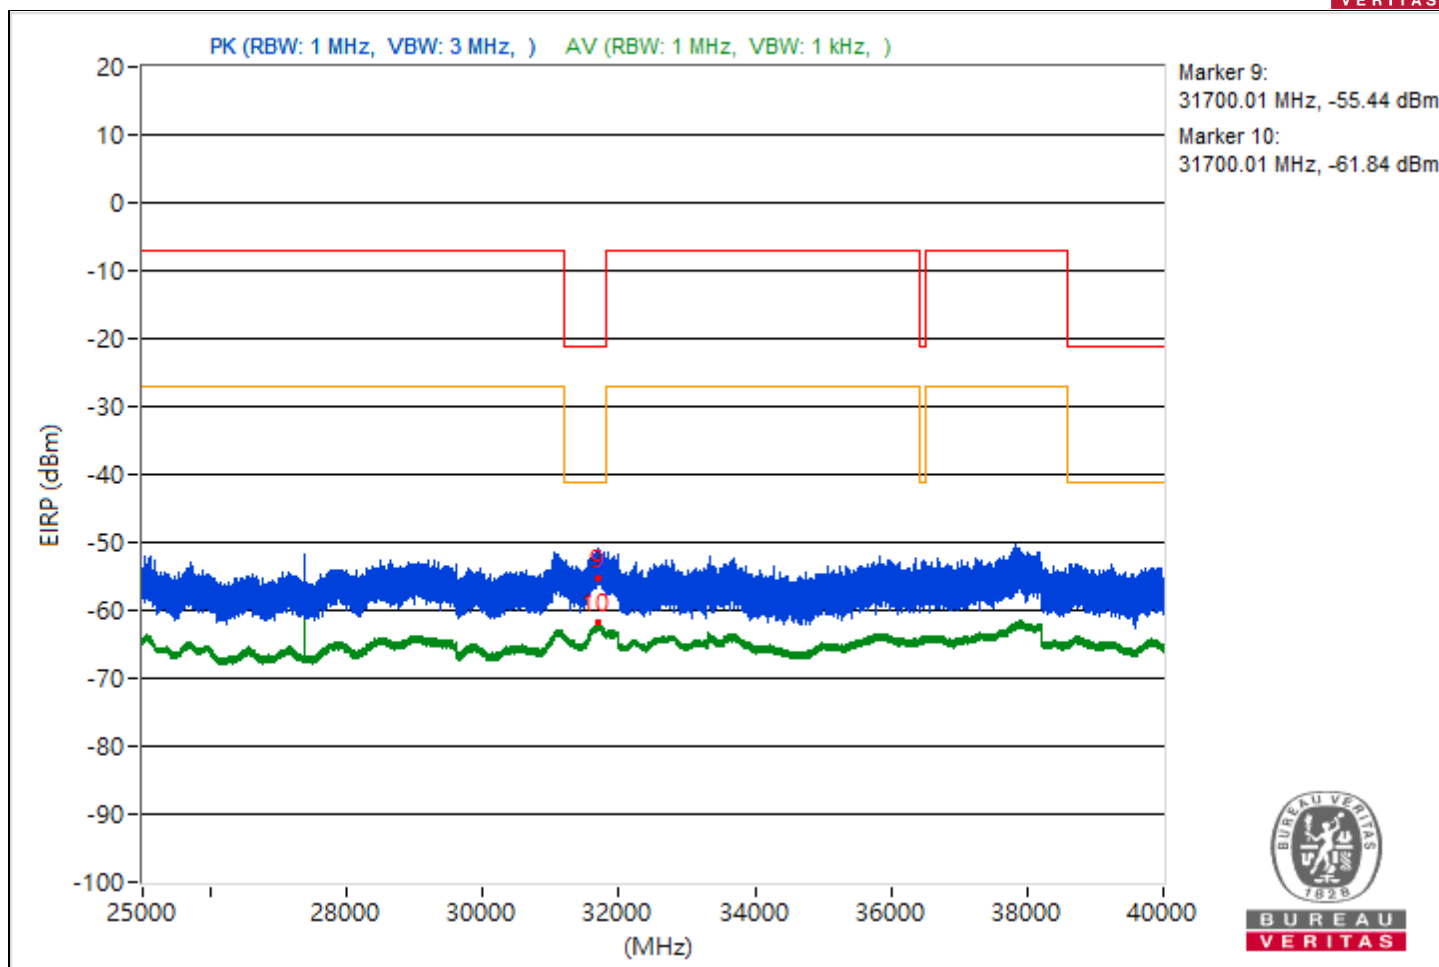



RF Mode	802.11ax (HE80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5759.92	57.53 PK	88.26	-30.73	-49.29	-48.57	8.17	-37.73
2	#5759.92	52.74 AV	68.26	-15.52	-53.79	-53.62	8.17	-42.52
3	7483.09	51.6 PK	74	-22.4	-55.36	-54.37	8.17	-43.66
4	7483.09	40.13 AV	54	-13.87	-65.97	-66.69	8.17	-55.13
5	21221.2	54.18 PK	74	-19.82	-51.87	-52.69	8.17	-41.08
6	21221.2	39.88 AV	54	-14.12	-66.18	-66.99	8.17	-55.38
7	22018.4	54.86 PK	74	-19.14	-51.48	-51.67	8.17	-40.4
8	22018.4	40.6 AV	54	-13.4	-65.99	-65.71	8.17	-54.66
9	31706	40.34 PK	74	-33.66	-65.97	-66.23	8.17	-54.92
10	31706	33.31 AV	54	-20.69	-73.35	-72.93	8.17	-61.95

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

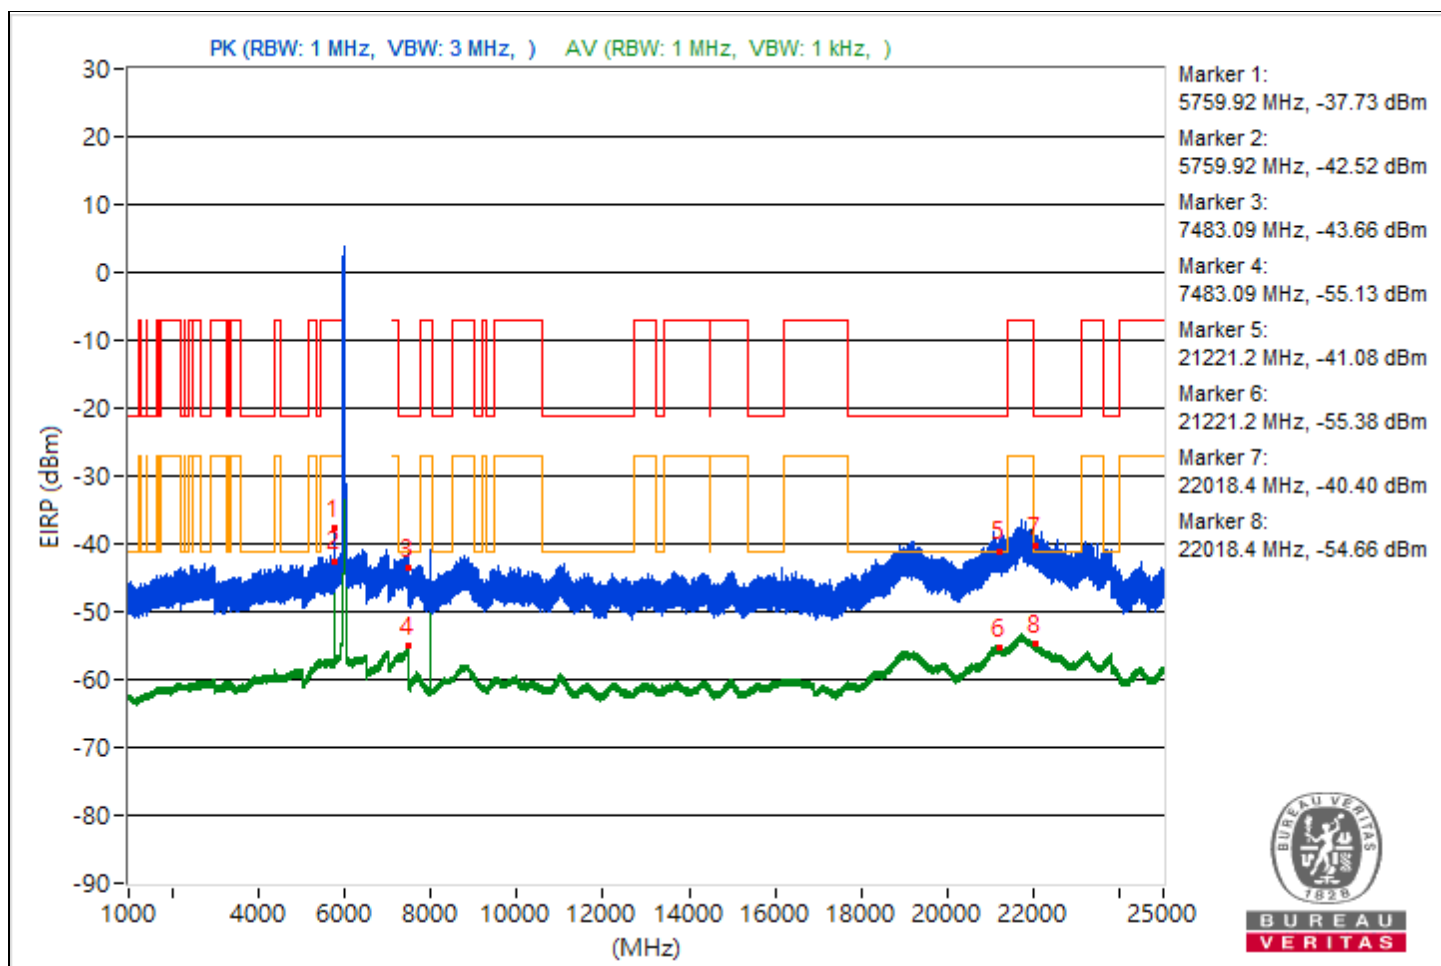

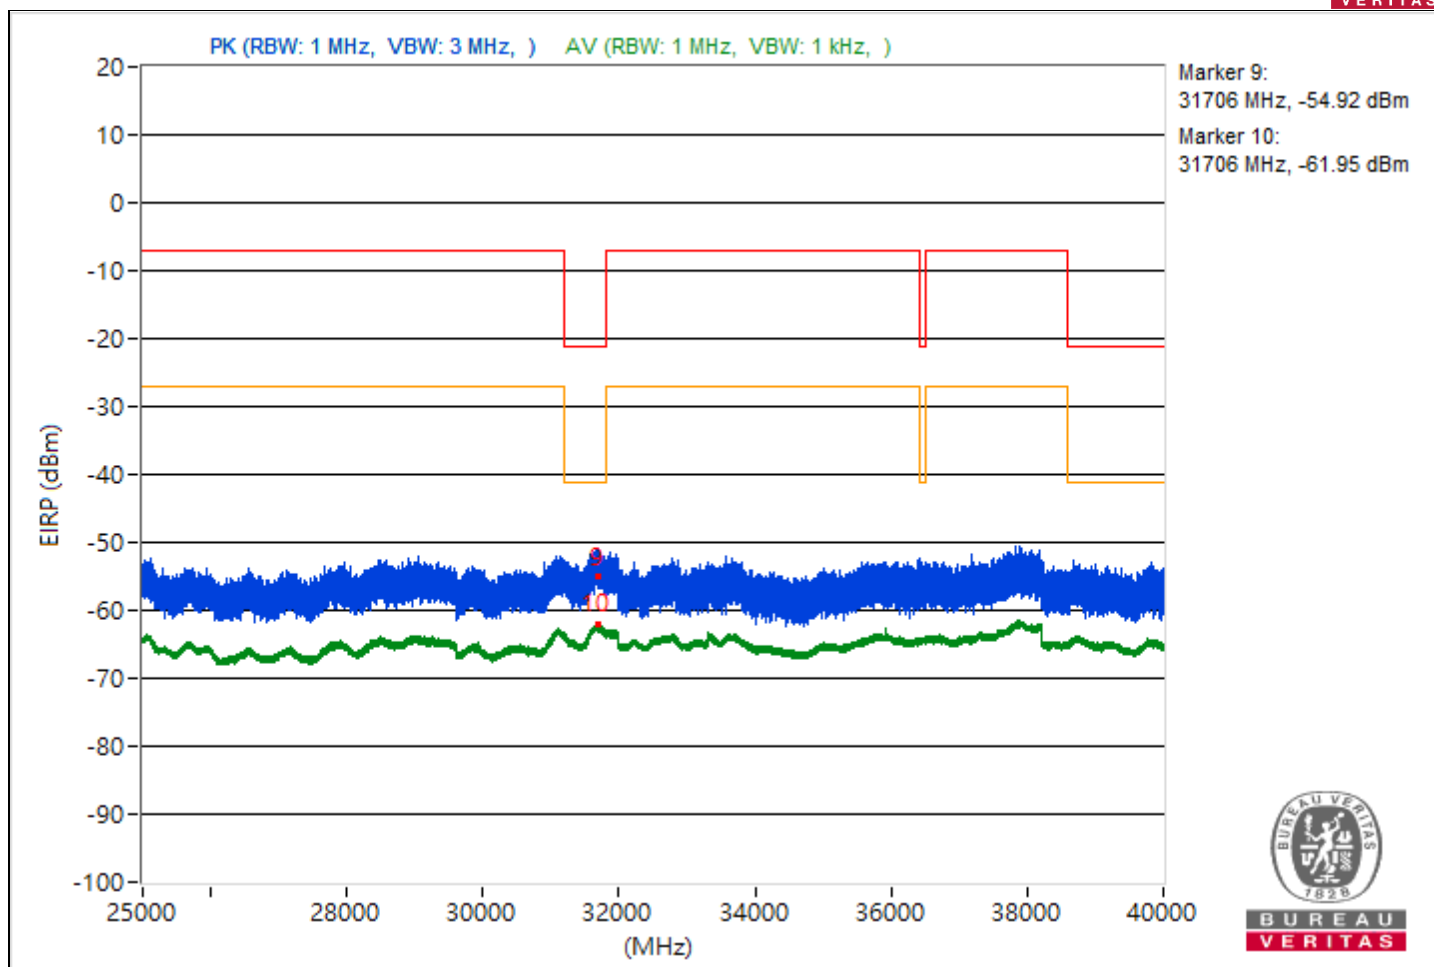



RF Mode	802.11ax (HE80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5759.92	59.94 PK	88.26	-28.32	-46.53	-46.48	8.17	-35.32
2	#5759.92	56.81 AV	68.26	-11.45	-49.58	-49.69	8.17	-38.45
3	8193.24	54.34 PK	74	-19.66	-51.56	-52.73	8.17	-40.92
4	8193.24	50.45 AV	54	-3.55	-56	-55.97	8.17	-44.81
5	21106.3	54.65 PK	74	-19.35	-50.79	-53.08	8.17	-40.61
6	21106.3	39.94 AV	54	-14.06	-66.1	-66.93	8.17	-55.32
7	22021.9	54.7 PK	74	-19.3	-51.28	-52.24	8.17	-40.56
8	22021.9	40.54 AV	54	-13.46	-66.14	-65.67	8.17	-54.72
9	31698.46	41.98 PK	74	-32.02	-65.4	-63.68	8.17	-53.28
10	31698.46	33.13 AV	54	-20.87	-73.67	-72.98	8.17	-62.13

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

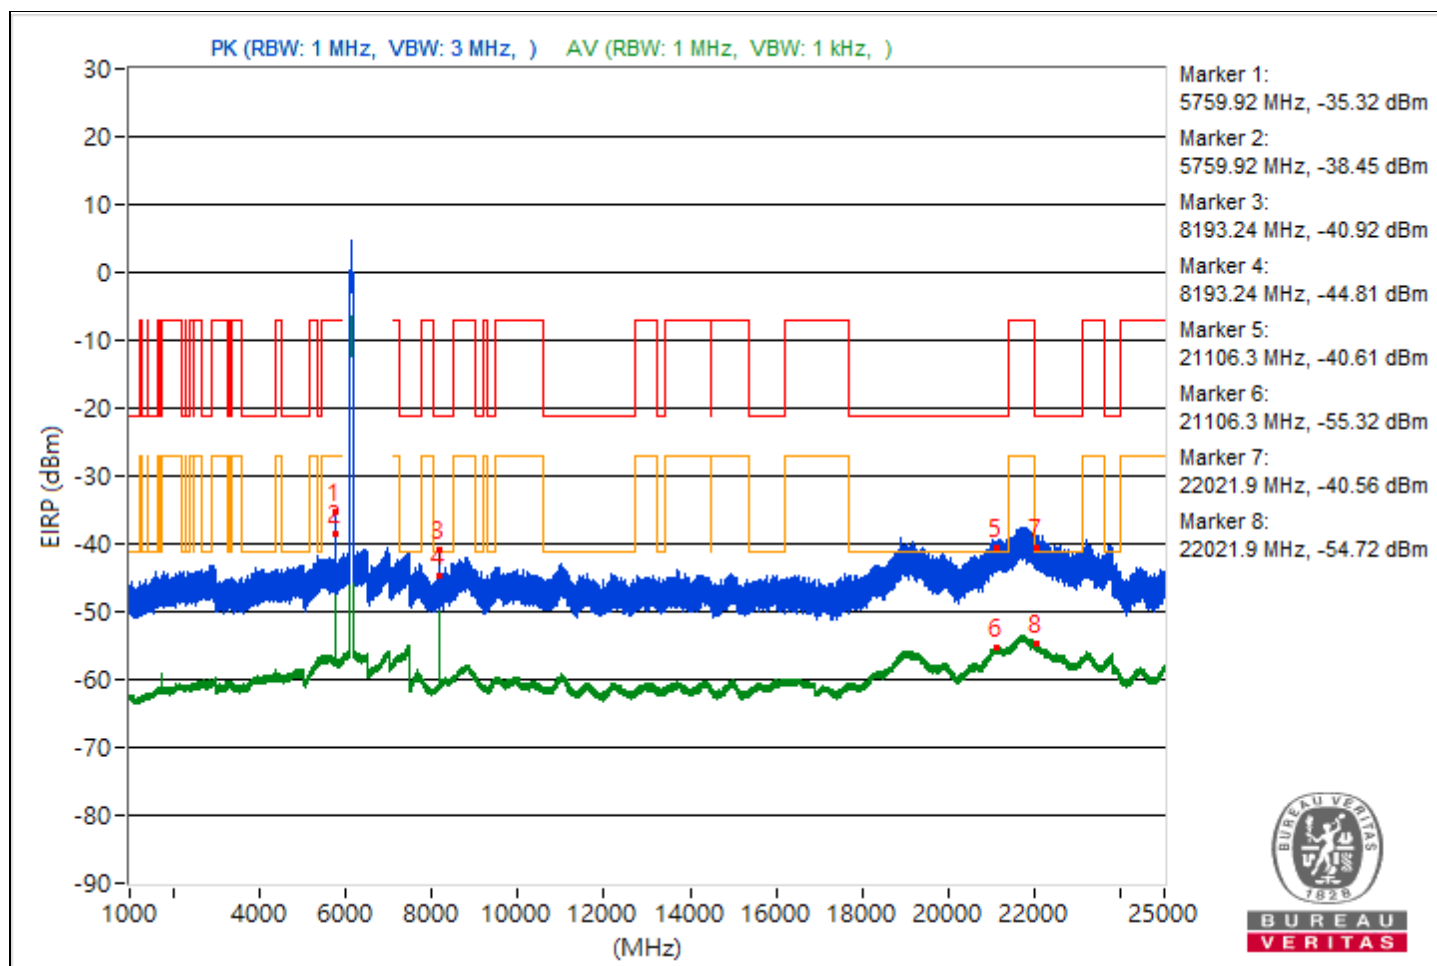

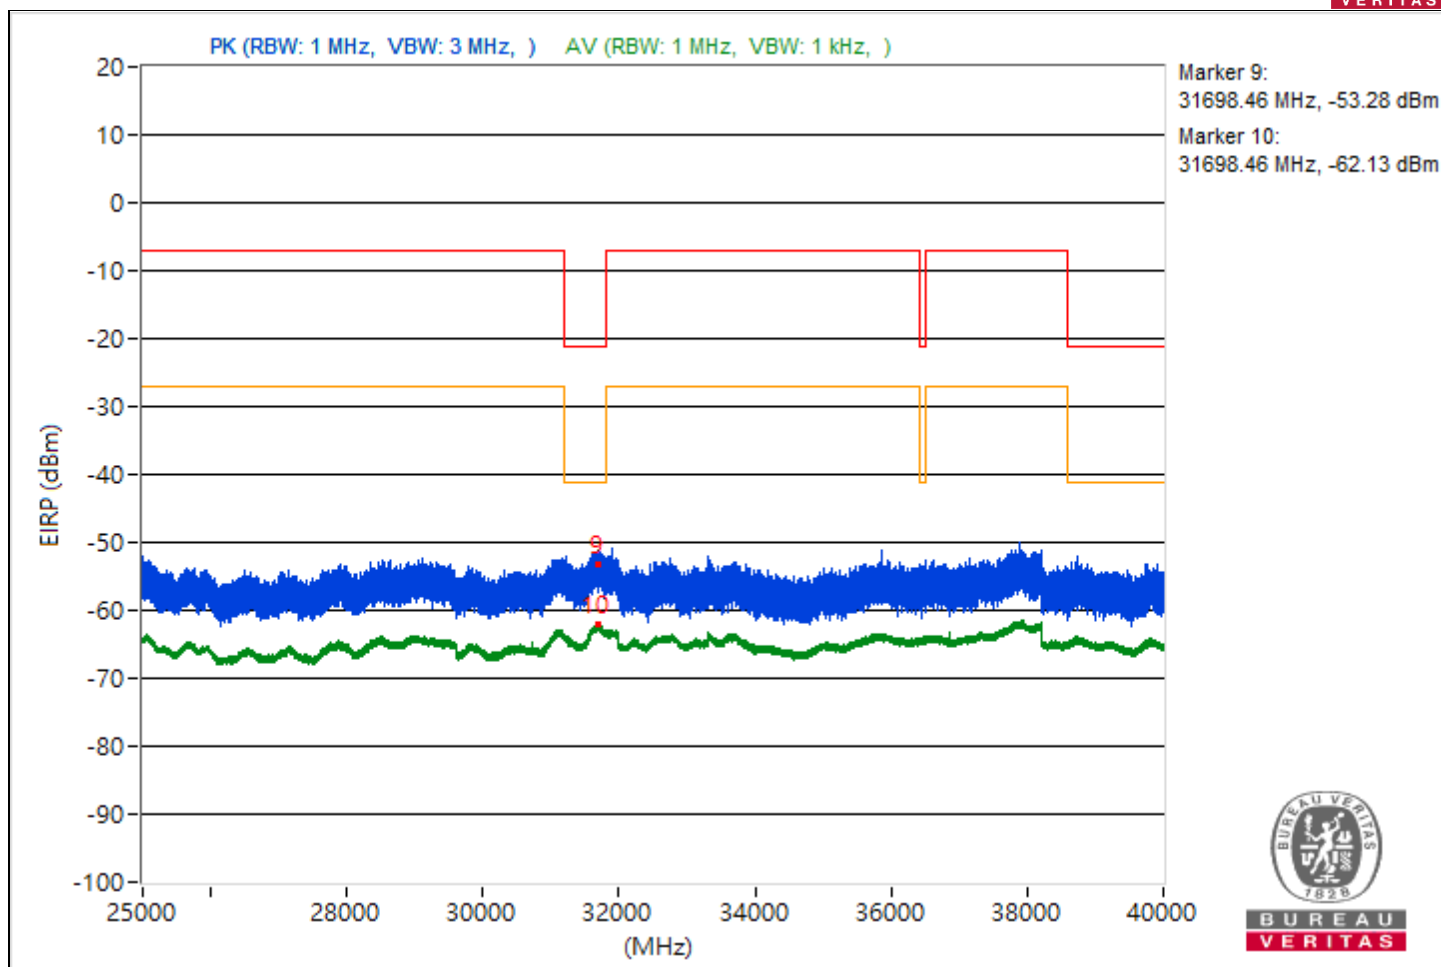



RF Mode	802.11ax (HE80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5760	56.73 PK	88.26	-31.53	-50.99	-48.72	8.17	-38.53
2	#5760	52.47 AV	68.26	-15.79	-55.36	-52.93	8.17	-42.79
3	7499.03	52.35 PK	74	-21.65	-54.18	-53.99	8.17	-42.91
4	7499.03	40.14 AV	54	-13.86	-66.01	-66.63	8.17	-55.12
5	21112.9	53.38 PK	74	-20.62	-53.6	-52.58	8.17	-41.88
6	21112.9	40.06 AV	54	-13.94	-66.16	-66.62	8.17	-55.2
7	22020.8	54.48 PK	74	-19.52	-51.12	-53	8.17	-40.78
8	22020.8	40.4 AV	54	-13.6	-66.25	-65.83	8.17	-54.86
9	31696.12	40.5 PK	74	-33.5	-67.76	-64.66	8.17	-54.76
10	31696.12	33.22 AV	54	-20.78	-73.7	-72.8	8.17	-62.04

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

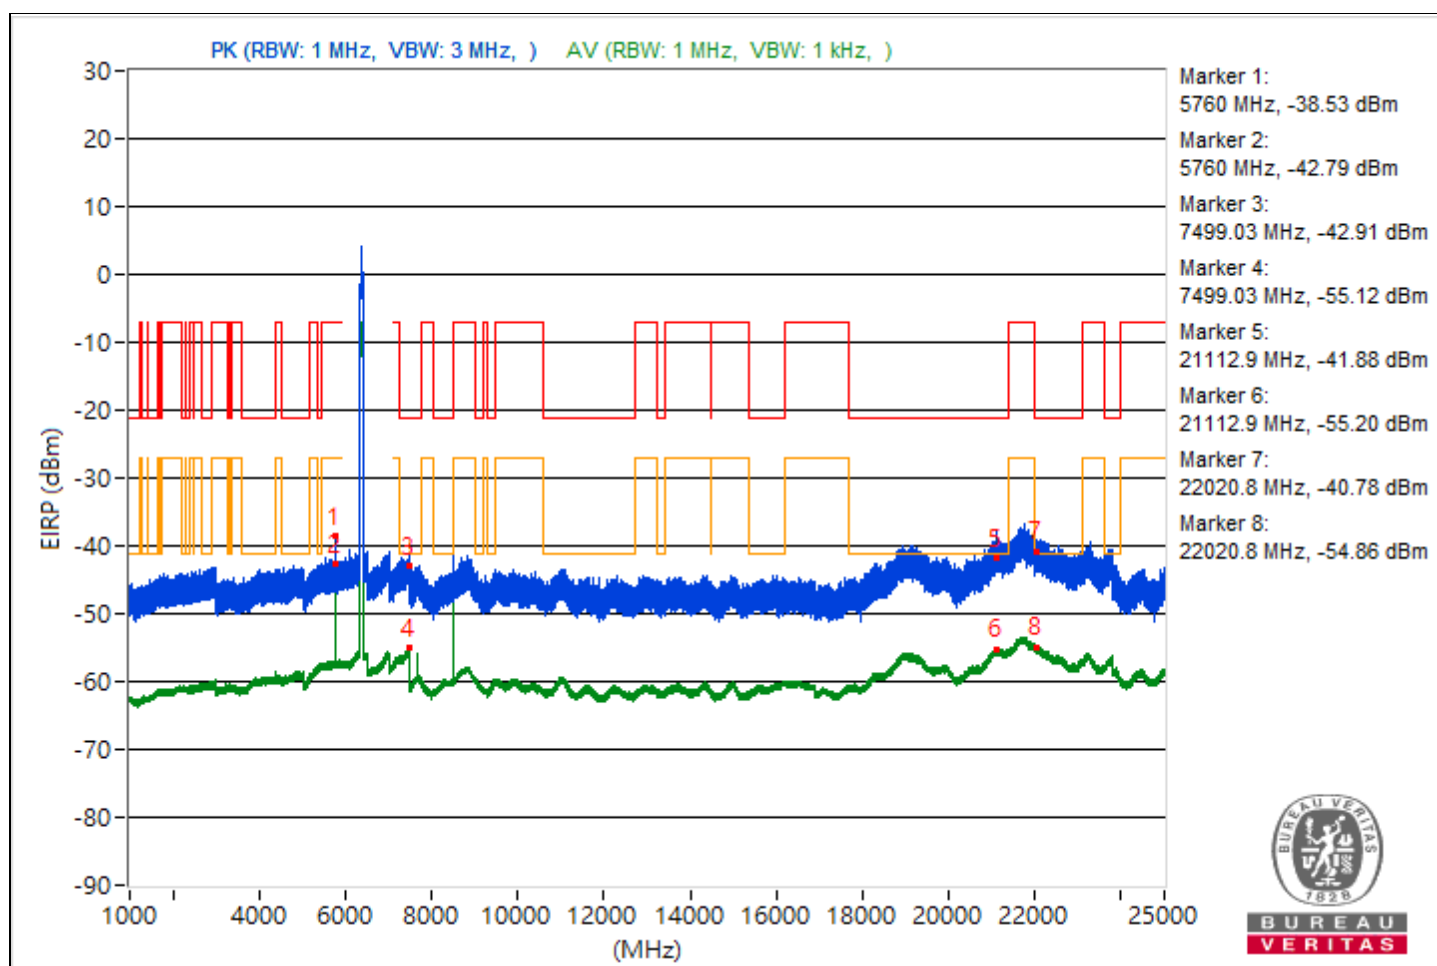

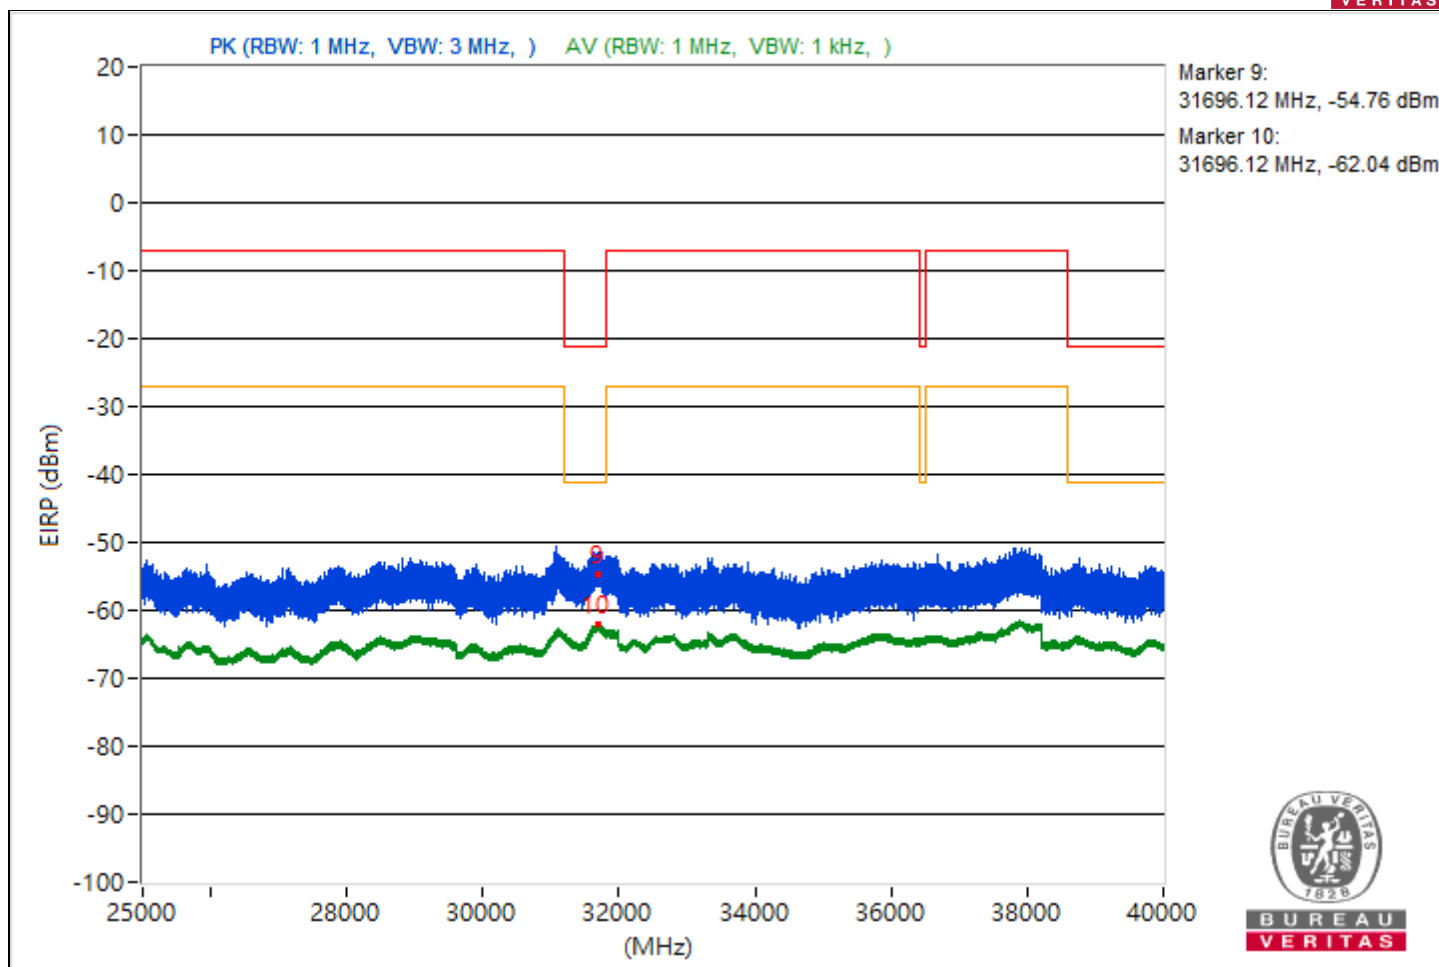



RF Mode	802.11ax (HE80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5760	57.65 PK	88.26	-30.61	-50.21	-47.72	8.17	-37.61
2	#5760	53.61 AV	68.26	-14.65	-54.81	-51.48	8.17	-41.65
3	7480.52	52.16 PK	74	-21.84	-54.71	-53.9	8.17	-43.1
4	7480.52	40.15 AV	54	-13.85	-65.93	-66.7	8.17	-55.11
5	21367.2	54.08 PK	74	-19.92	-52.9	-51.87	8.17	-41.18
6	21367.2	40.05 AV	54	-13.95	-65.93	-66.9	8.17	-55.21
7	22038.4	53.7 PK	74	-20.3	-51.78	-53.98	8.17	-41.56
8	22038.4	40.39 AV	54	-13.61	-66.21	-65.89	8.17	-54.87
9	31703.98	41.28 PK	74	-32.72	-64.54	-65.88	8.17	-53.98
10	31703.98	33.24 AV	54	-20.76	-73.45	-72.97	8.17	-62.02

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

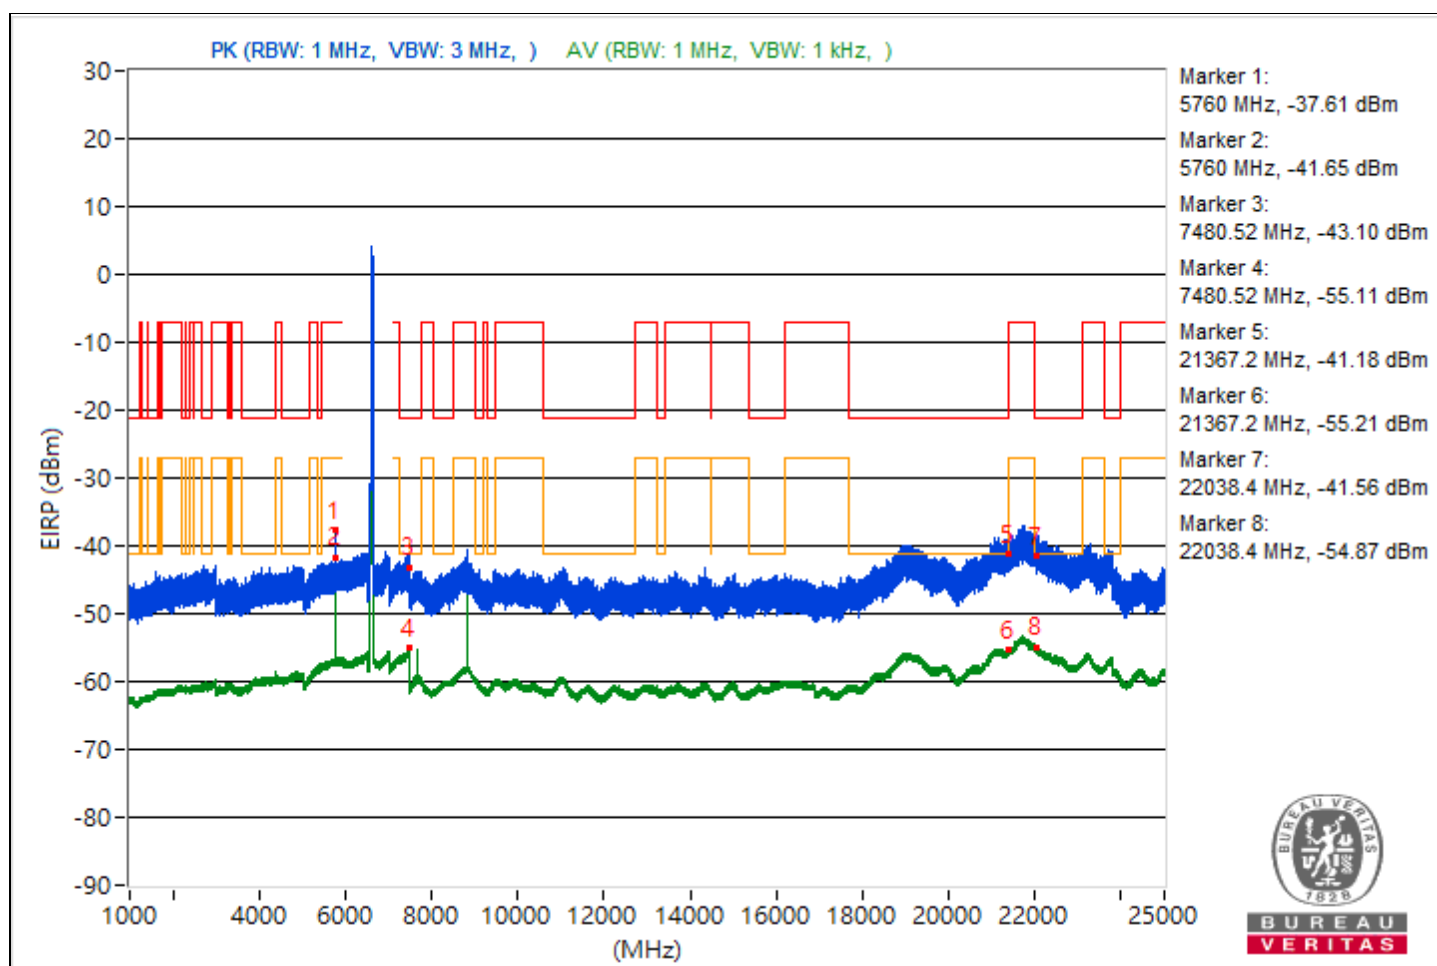


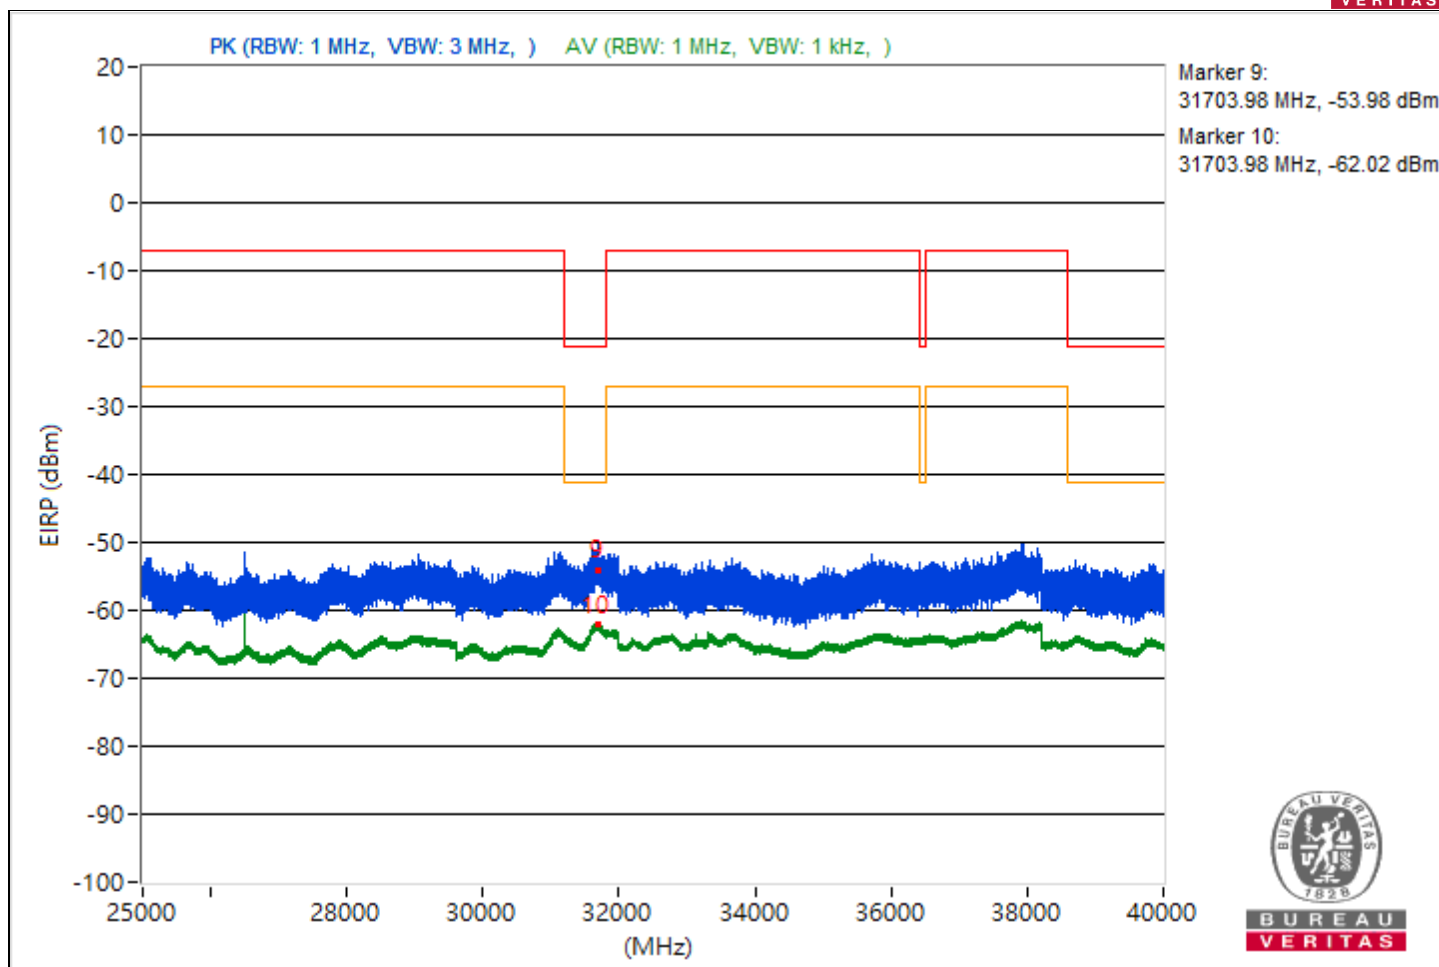


RF Mode	802.11ax (HE80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5437.3	51.32 PK	74	-22.68	-53.81	-57.01	8.17	-43.94
2	5437.3	37.6 AV	54	-16.4	-68.62	-69.07	8.17	-57.66
3	7488.77	51.35 PK	74	-22.65	-55.42	-54.79	8.17	-43.91
4	7488.77	40.22 AV	54	-13.78	-66.35	-66.09	8.17	-55.04
5	21399.3	53.97 PK	74	-20.03	-52.47	-52.47	8.17	-41.29
6	21399.3	39.93 AV	54	-14.07	-66.94	-66.12	8.17	-55.33
7	22016.4	53.64 PK	74	-20.36	-52.91	-52.69	8.17	-41.62
8	22016.4	40.43 AV	54	-13.57	-66.38	-65.67	8.17	-54.83
9	31699.39	41.82 PK	74	-32.18	-64.37	-64.89	8.17	-53.44
10	31699.39	33.21 AV	54	-20.79	-73.83	-72.71	8.17	-62.05

Note: Margin value = Emission Level - Limit value

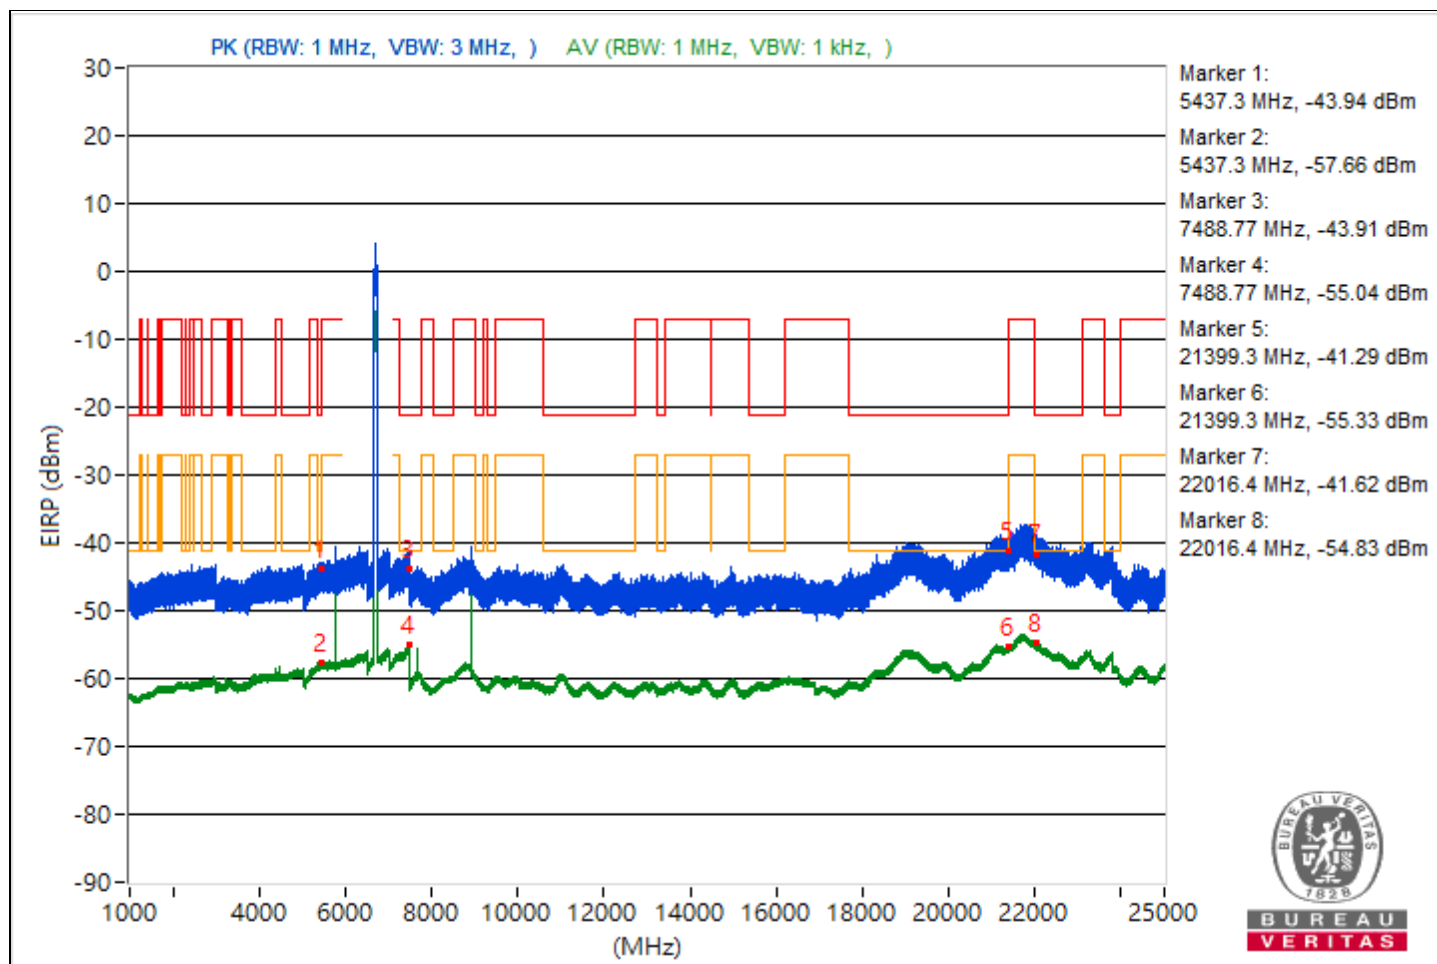


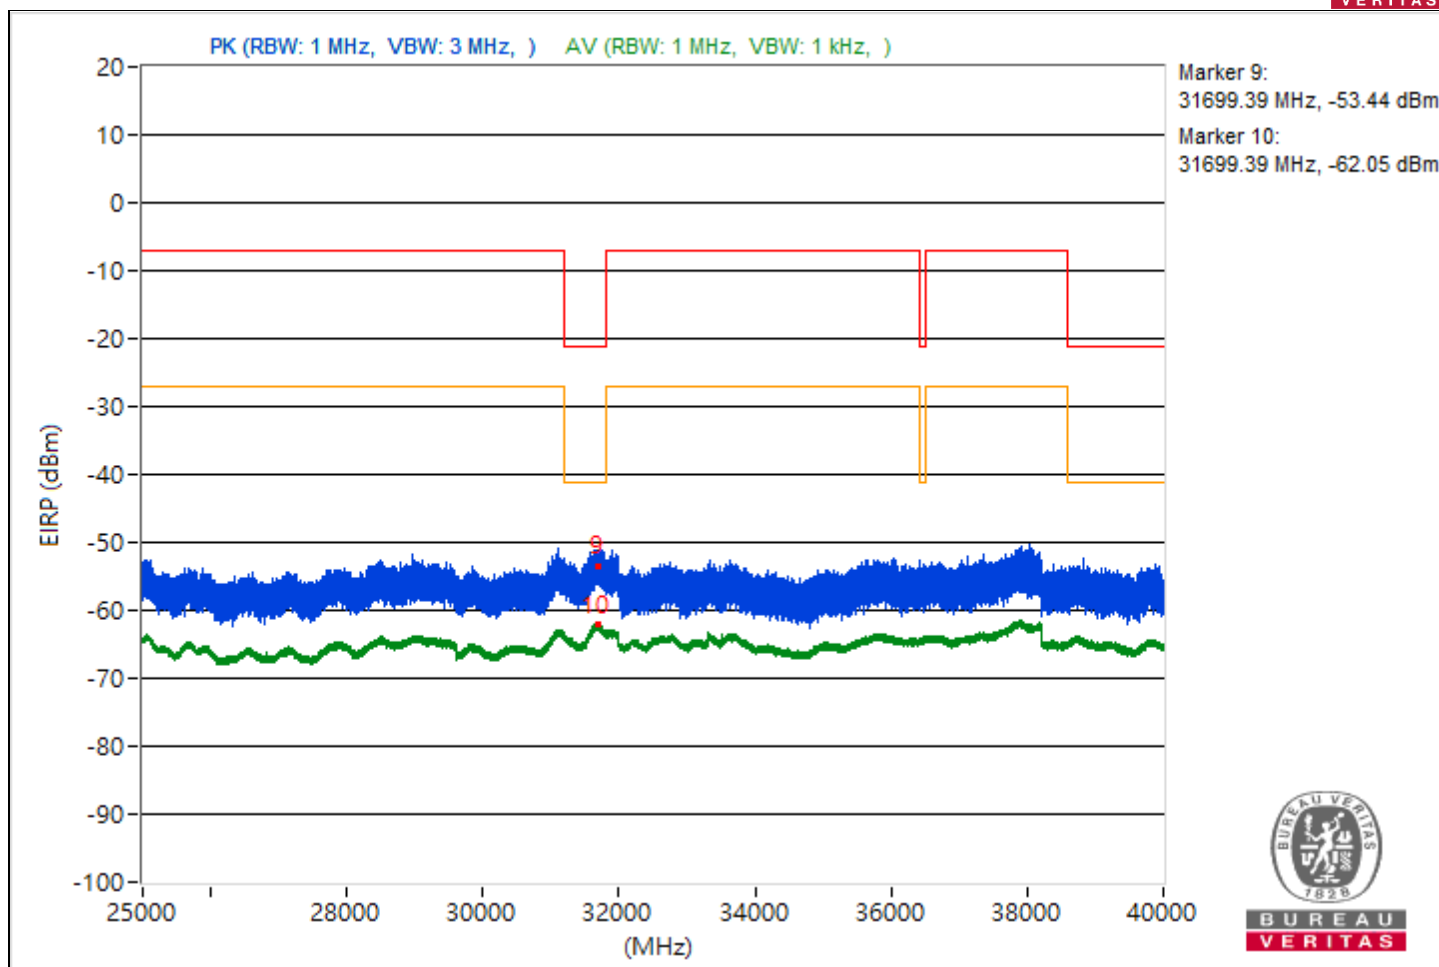


RF Mode	802.11ax (HE80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4523.33	50.23 PK	74	-23.77	-56.88	-55.64	8.17	-45.03
2	4523.33	38.01 AV	54	-15.99	-68.73	-68.15	8.17	-57.25
3	9046.58	52.97 PK	74	-21.03	-53.41	-53.53	8.17	-42.29
4	9046.58	47.48 AV	54	-6.52	-58.94	-58.98	8.17	-47.78
5	21396.8	54.31 PK	74	-19.69	-53.28	-51.22	8.17	-40.95
6	21396.8	40.15 AV	54	-13.85	-66.09	-66.5	8.17	-55.11
7	22013.4	53.7 PK	74	-20.3	-53.14	-52.38	8.17	-41.56
8	22013.4	40.45 AV	54	-13.55	-66.27	-65.74	8.17	-54.81
9	31700.32	41 PK	74	-33	-64.23	-67.1	8.17	-54.26
10	31700.32	33.49 AV	54	-20.51	-73.14	-72.76	8.17	-61.77

Note: Margin value = Emission Level - Limit value

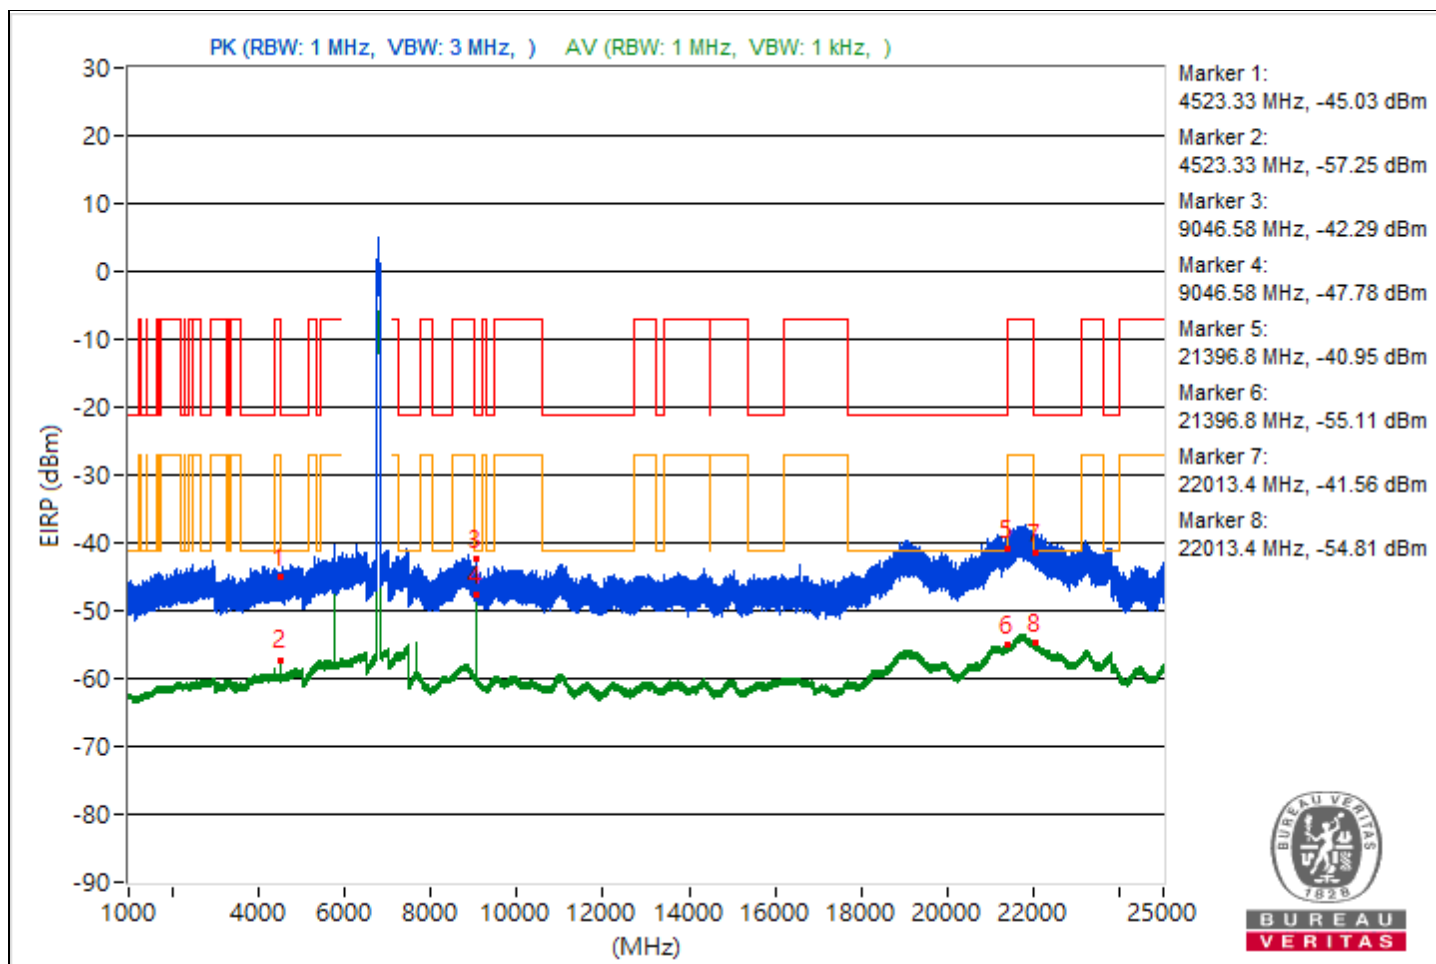

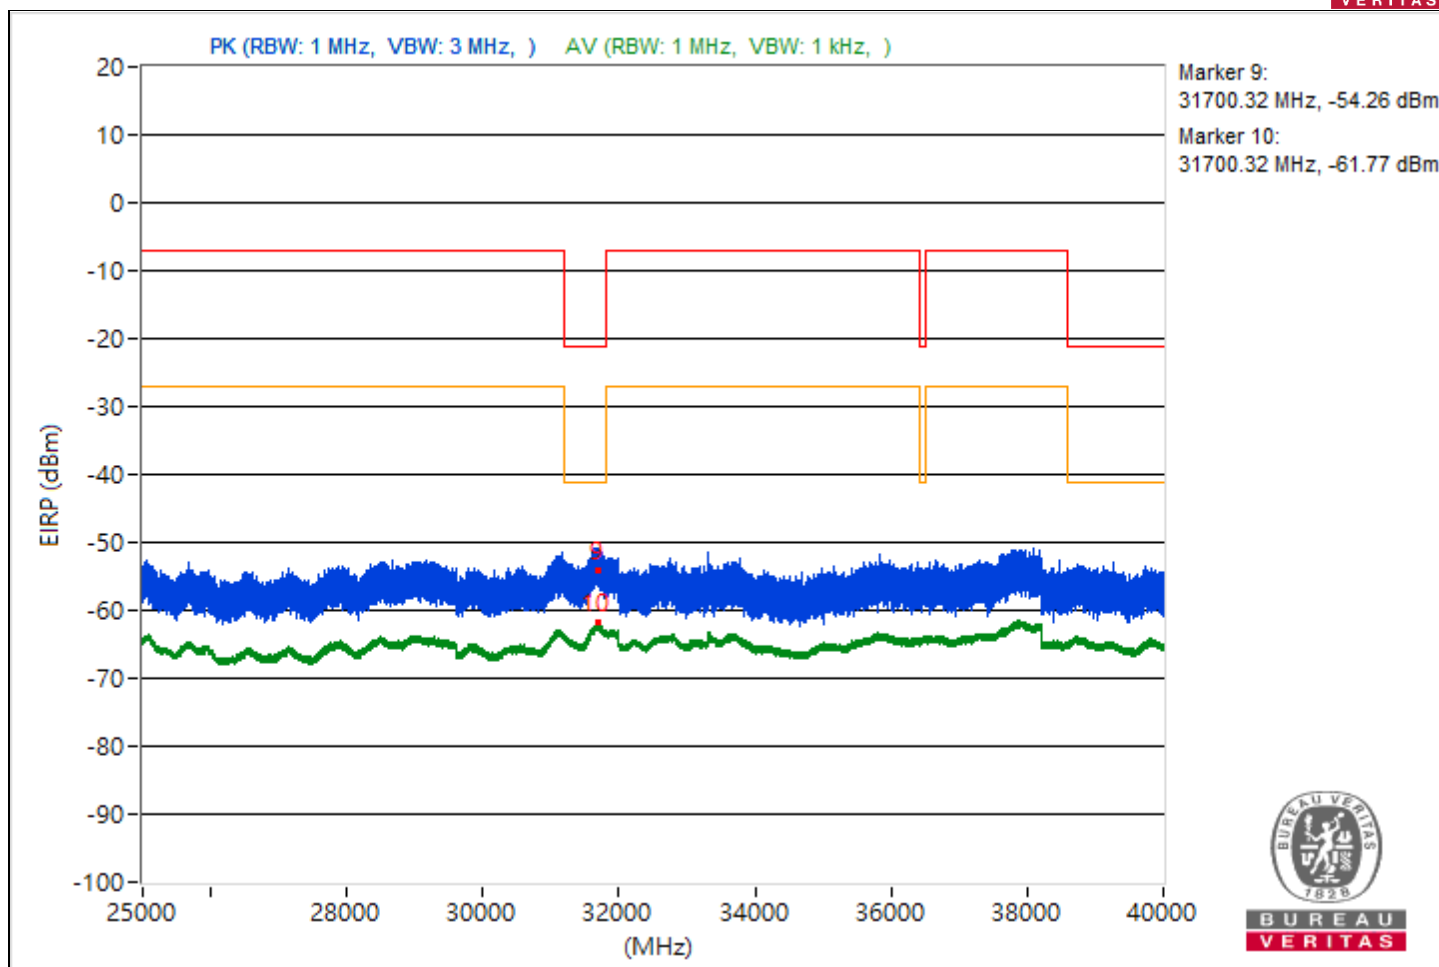



RF Mode	802.11ax (HE160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5760	56.56 PK	88.26	-31.7	-51.23	-48.85	8.17	-38.7
2	#5760	51.49 AV	68.26	-16.77	-59.64	-52.74	8.17	-43.77
3	8033.24	52.68 PK	74	-21.32	-52.86	-54.89	8.17	-42.58
4	8033.24	48.87 AV	54	-5.13	-55.49	-61.72	8.17	-46.39
5	21150.1	54.06 PK	74	-19.94	-51.57	-53.37	8.17	-41.2
6	21150.1	40.01 AV	54	-13.99	-66.02	-66.88	8.17	-55.25
7	22031.8	55.03 PK	74	-18.97	-52.83	-50.34	8.17	-40.23
8	22031.8	40.52 AV	54	-13.48	-66.12	-65.74	8.17	-54.74
9	31697.76	41.28 PK	74	-32.72	-65.89	-64.53	8.17	-53.98
10	31697.76	33.21 AV	54	-20.79	-73.67	-72.84	8.17	-62.05

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

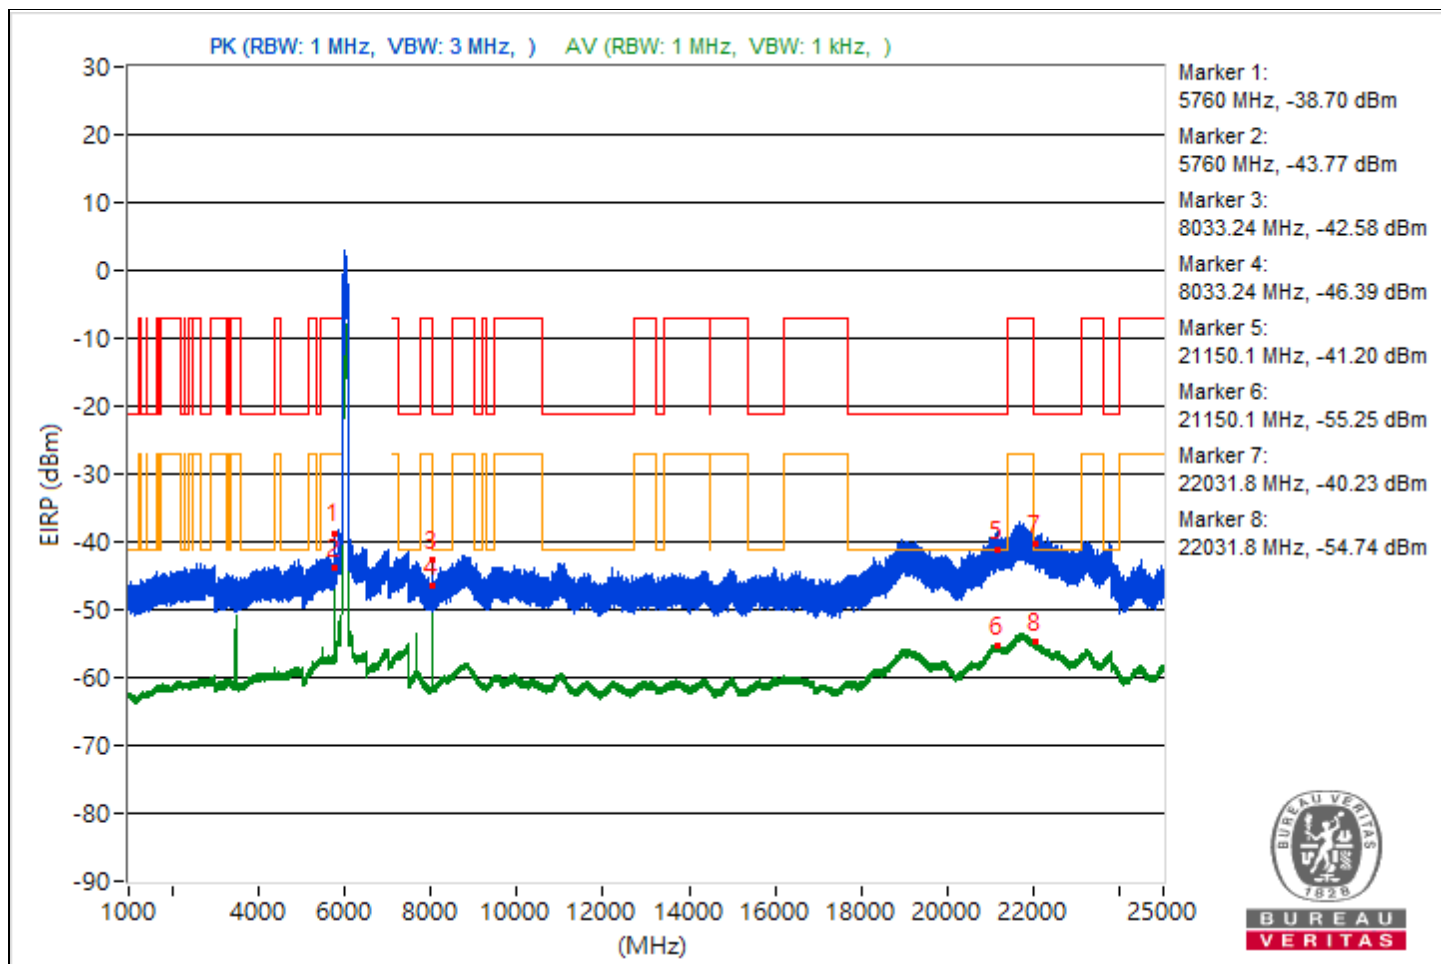

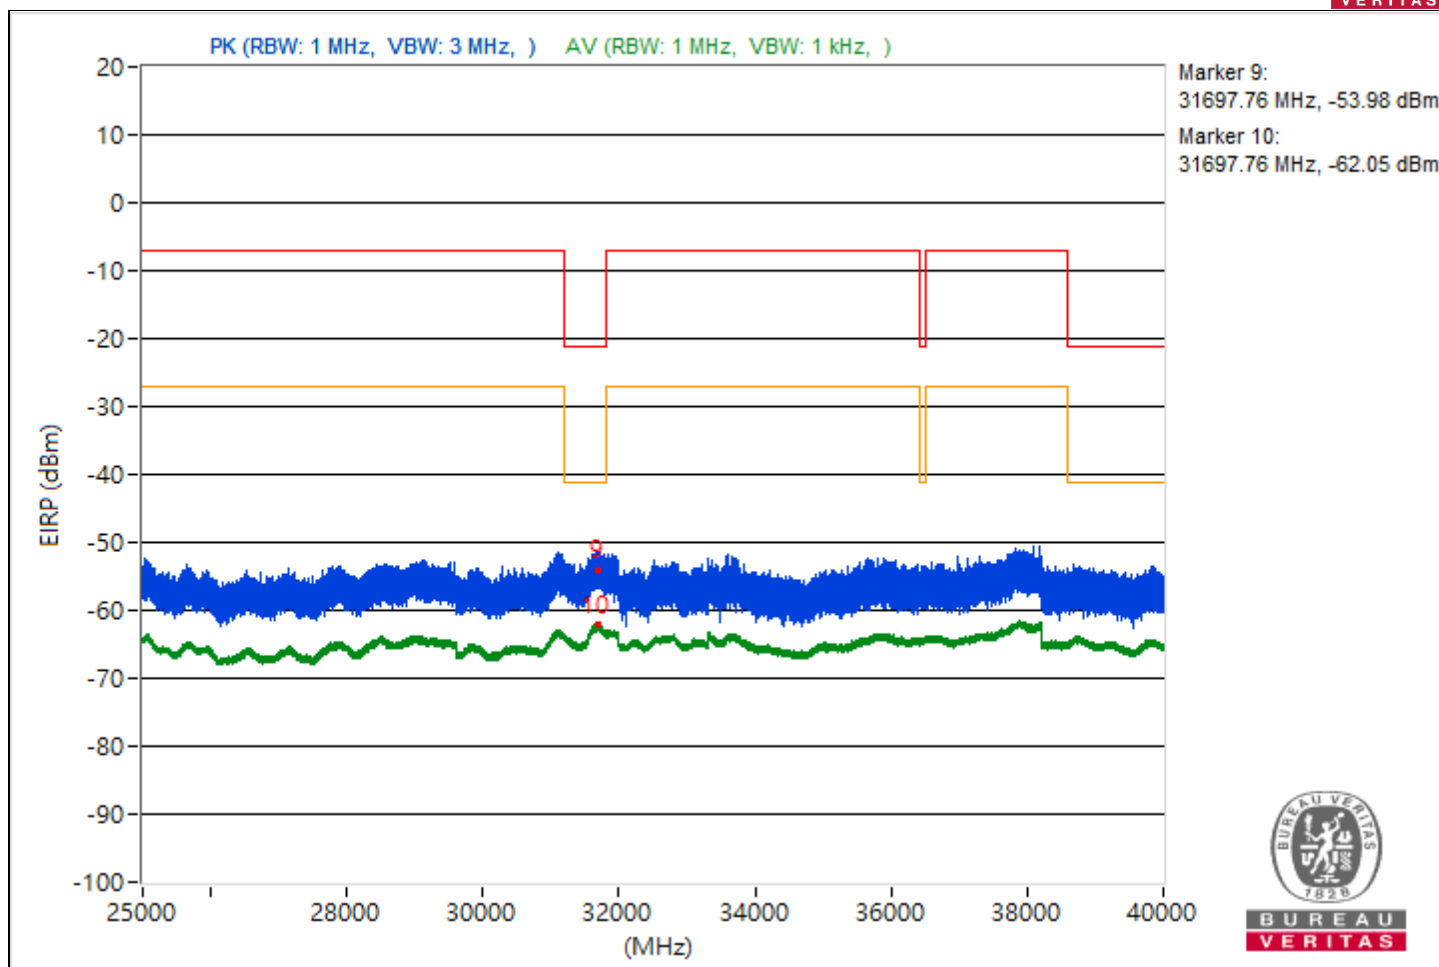



RF Mode	802.11ax (HE160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5759.92	56.72 PK	88.26	-31.54	-52	-48.23	8.17	-38.54
2	#5759.92	52.81 AV	68.26	-15.45	-60.1	-51.14	8.17	-42.45
3	8246.58	53.31 PK	74	-20.69	-52.71	-53.61	8.17	-41.95
4	8246.58	48.19 AV	54	-5.81	-56.24	-62.09	8.17	-47.07
5	21085.4	53.7 PK	74	-20.3	-51.9	-53.78	8.17	-41.56
6	21085.4	39.9 AV	54	-14.1	-67.03	-66.1	8.17	-55.36
7	22013.4	53.84 PK	74	-20.16	-52.61	-52.59	8.17	-41.42
8	22013.4	40.59 AV	54	-13.41	-66.08	-65.64	8.17	-54.67
9	31702.03	41.94 PK	74	-32.06	-64.11	-64.94	8.17	-53.32
10	31702.03	33.24 AV	54	-20.76	-72.87	-73.55	8.17	-62.02

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

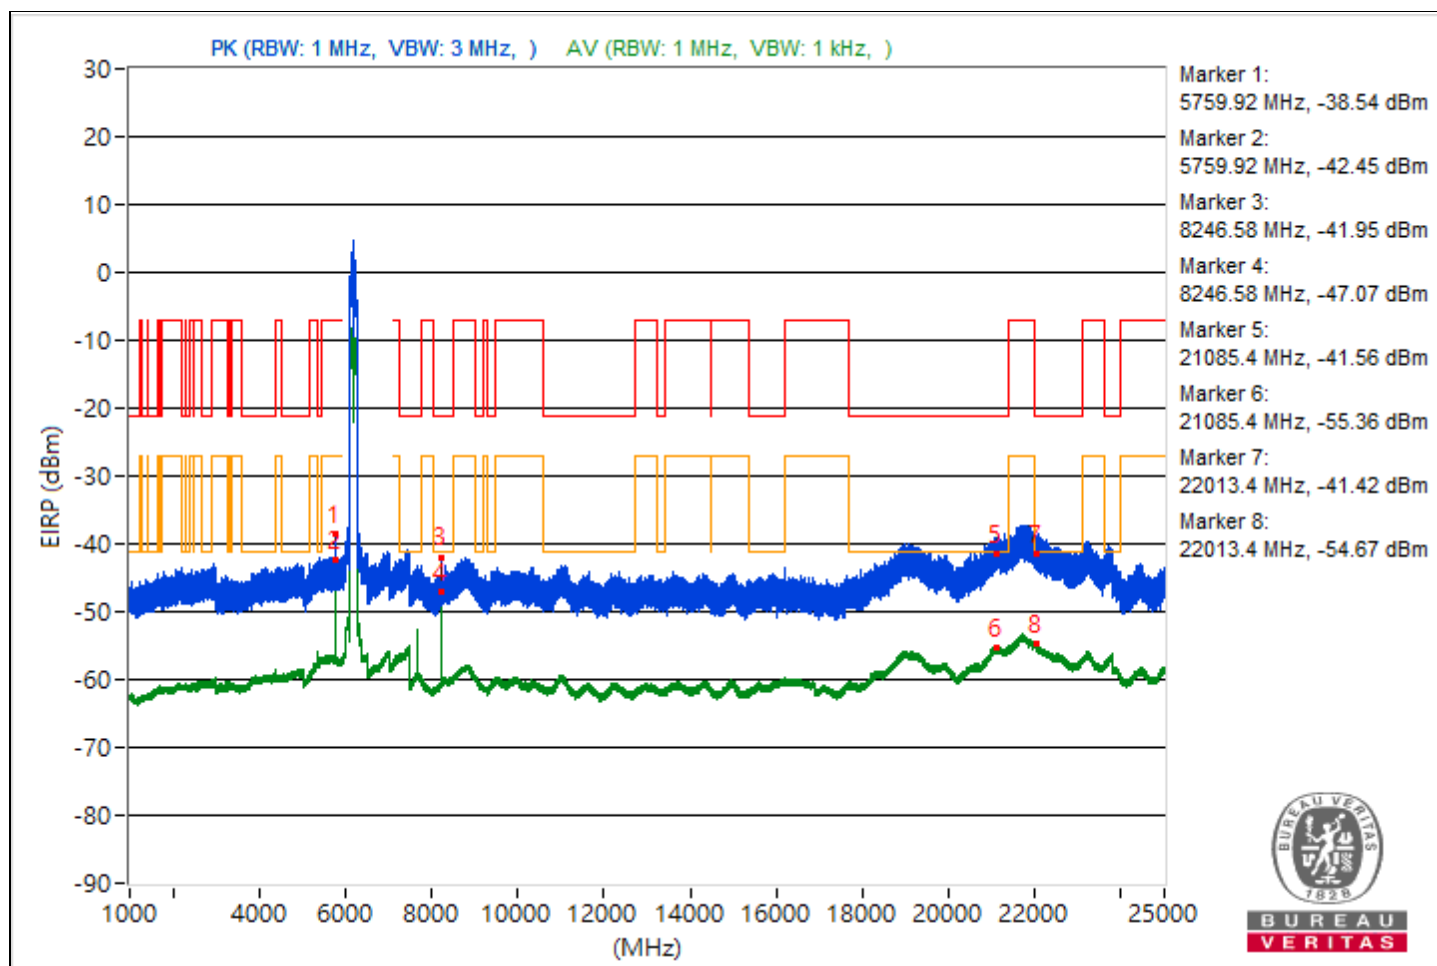

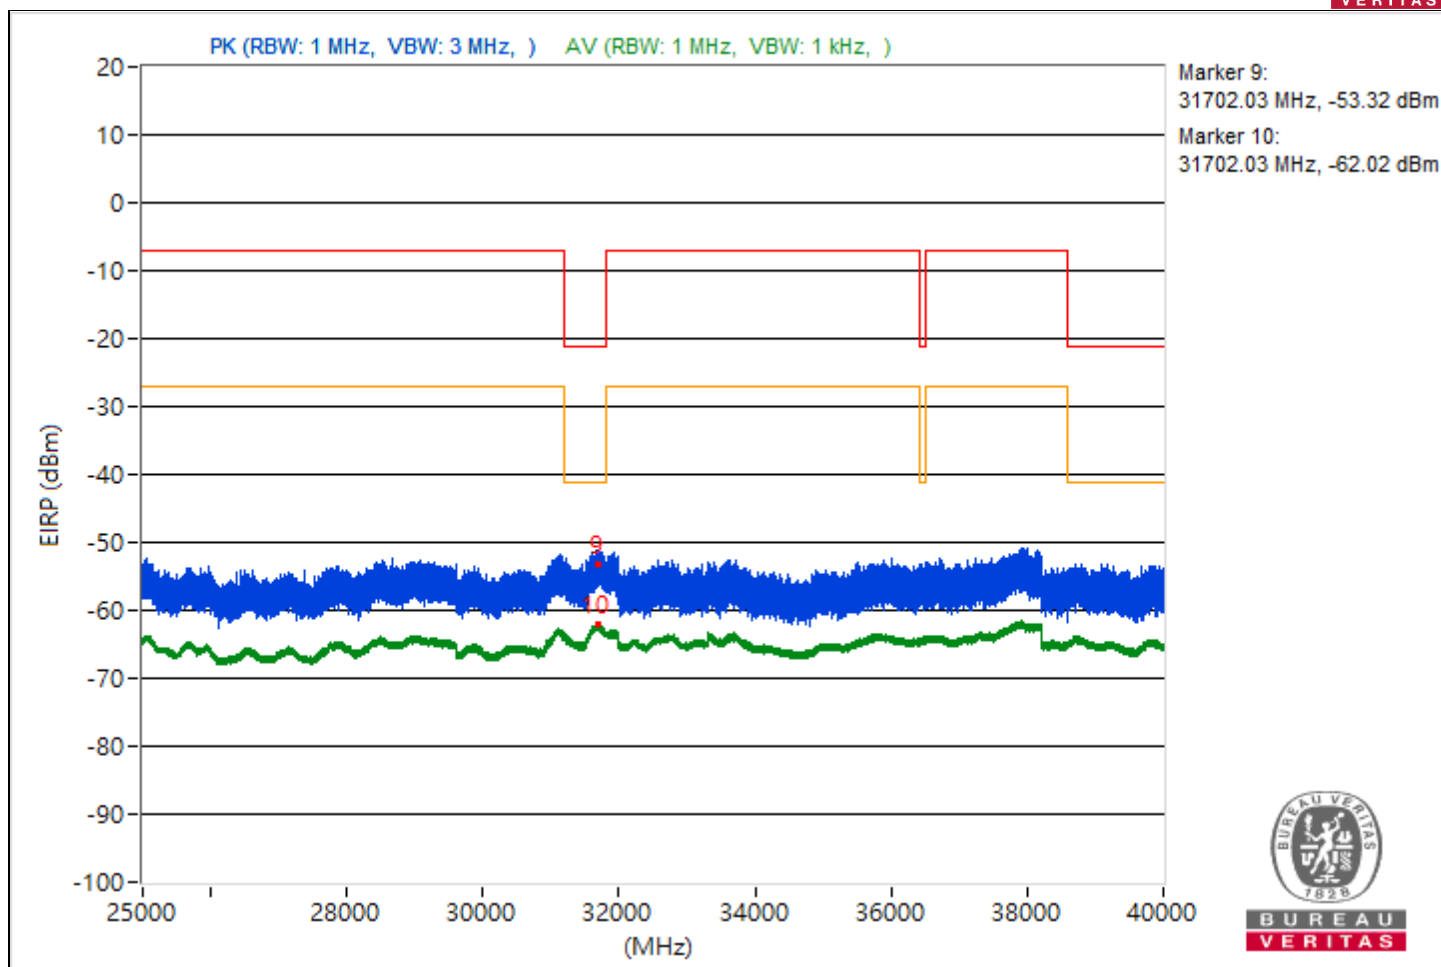



RF Mode	802.11ax (HE160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5759.92	55.51 PK	88.26	-32.75	-54.32	-49.05	8.17	-39.75
2	#5759.92	51.51 AV	68.26	-16.75	-67.79	-52.04	8.17	-43.75
3	8459.91	55.46 PK	74	-18.54	-48.64	-56.4	8.17	-39.8
4	8459.91	50.3 AV	54	-3.7	-53.39	-65.51	8.17	-44.96
5	21160.3	53.39 PK	74	-20.61	-53.91	-52.33	8.17	-41.87
6	21160.3	40.06 AV	54	-13.94	-66.8	-65.99	8.17	-55.2
7	22017.7	53 PK	74	-21	-53.34	-53.54	8.17	-42.26
8	22017.7	40.6 AV	54	-13.4	-65.83	-65.85	8.17	-54.66
9	31705.53	40.77 PK	74	-33.23	-67.39	-64.44	8.17	-54.49
10	31705.53	33.07 AV	54	-20.93	-73.84	-72.94	8.17	-62.19

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

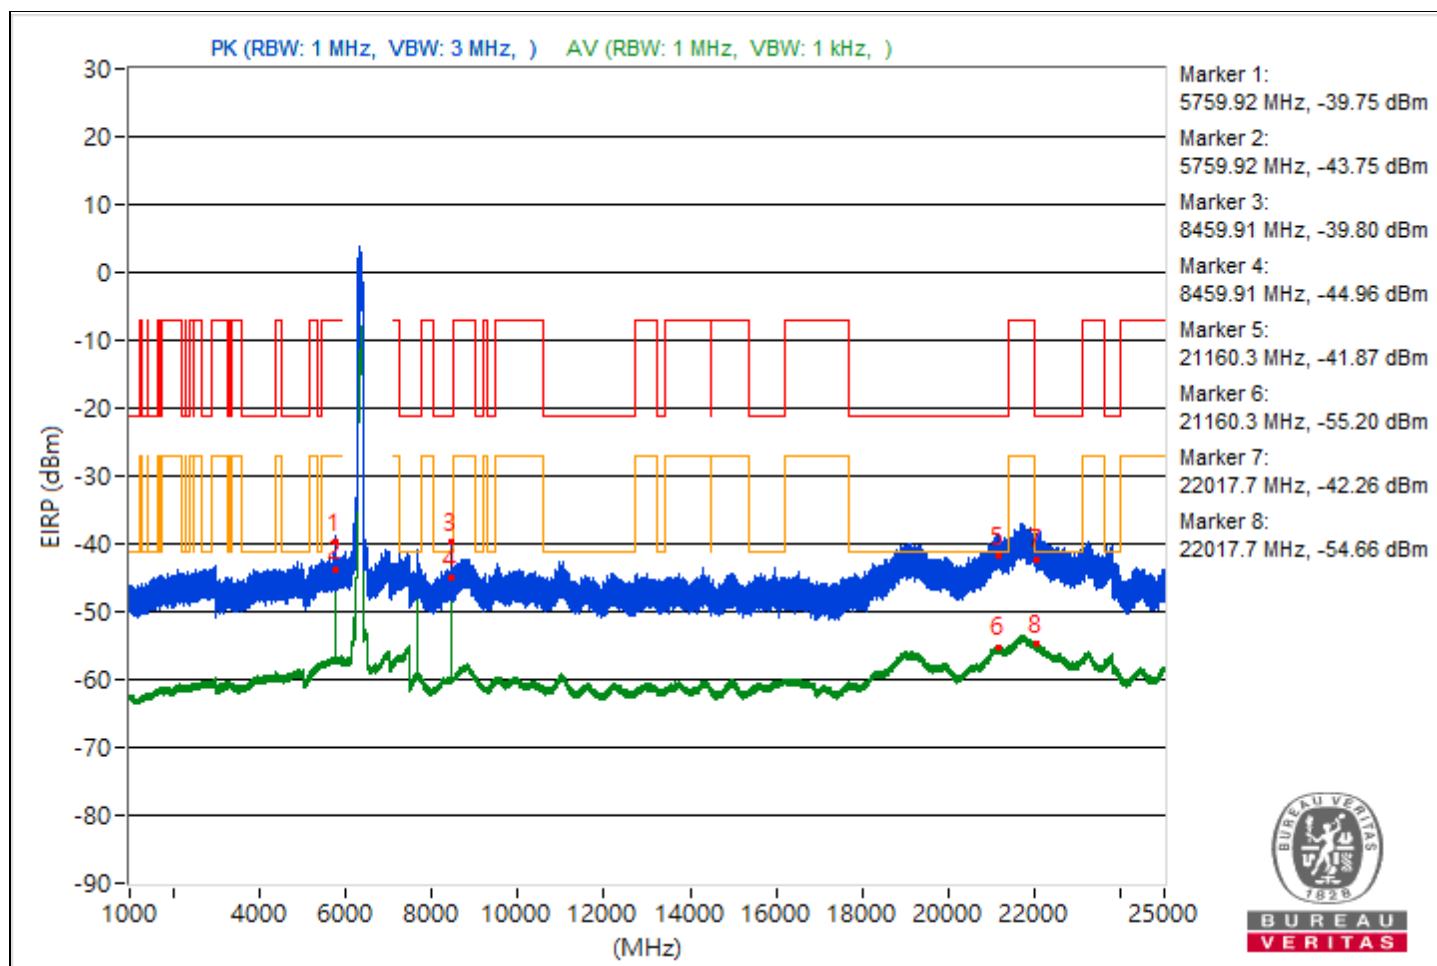

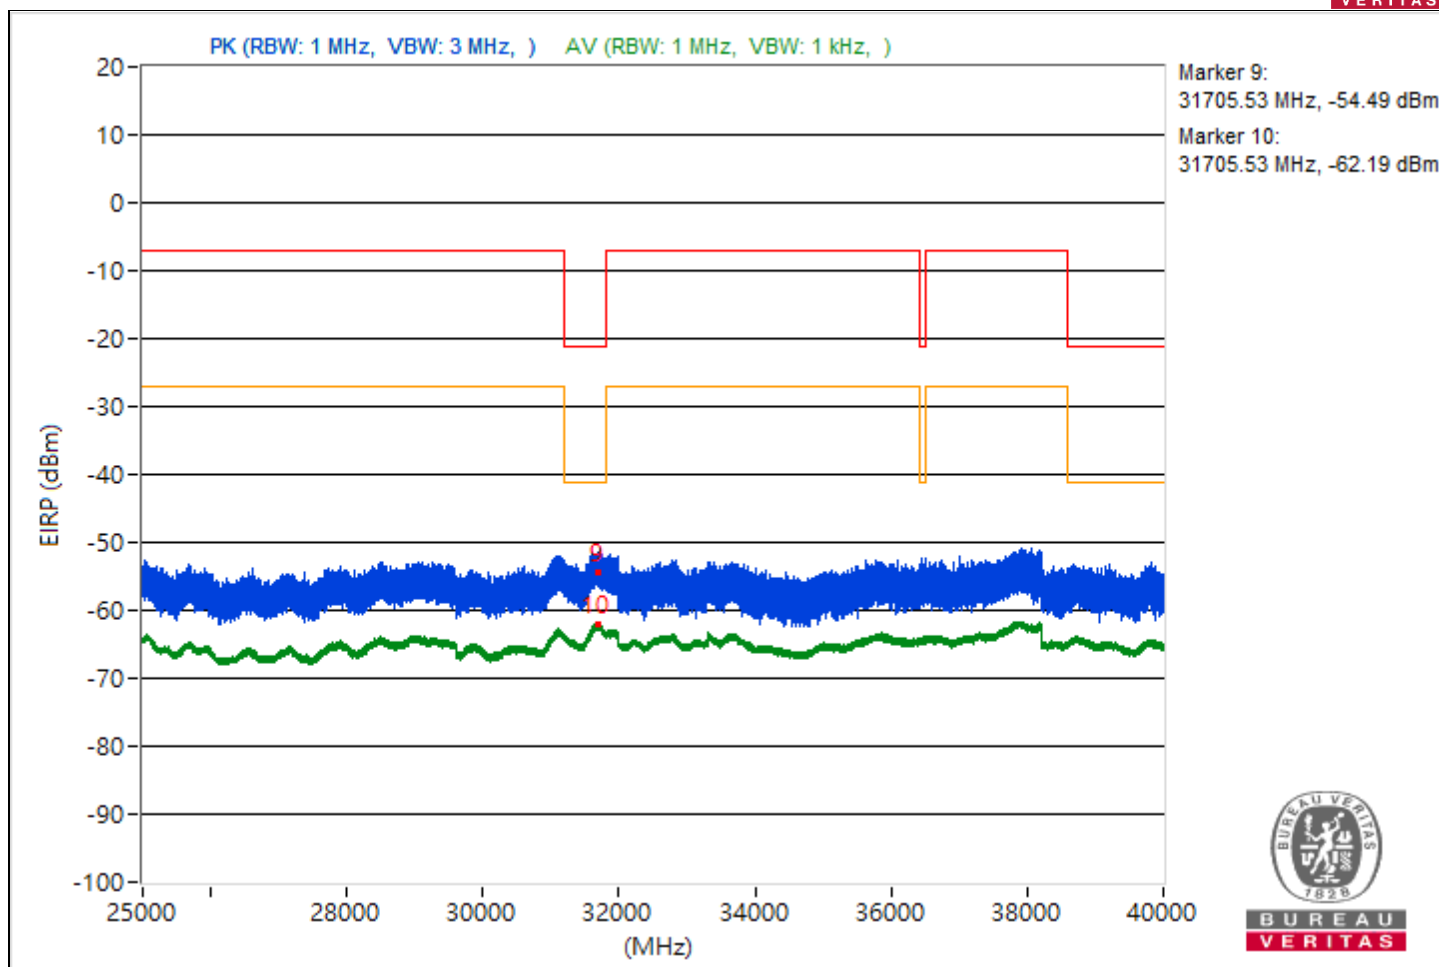



RF Mode	802.11ax (HE160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5760	59.35 PK	88.26	-28.91	-55.25	-44.43	8.17	-35.91
2	#5760	56.62 AV	68.26	-11.64	-67.35	-46.84	8.17	-38.64
3	7680.02	54.69 PK	74	-19.31	-49.93	-54.92	8.17	-40.57
4	7680.02	49 AV	54	-5	-54.83	-64.92	8.17	-46.26
5	21119.8	55.06 PK	74	-18.94	-52.18	-50.7	8.17	-40.2
6	21119.8	40.1 AV	54	-13.9	-66.69	-66.02	8.17	-55.16
7	22019.4	53.28 PK	74	-20.72	-53	-53.33	8.17	-41.98
8	22019.4	40.42 AV	54	-13.58	-65.96	-66.08	8.17	-54.84
9	31691.92	41.2 PK	74	-32.8	-64.11	-66.78	8.17	-54.06
10	31691.92	33.13 AV	54	-20.87	-73.7	-72.95	8.17	-62.13

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

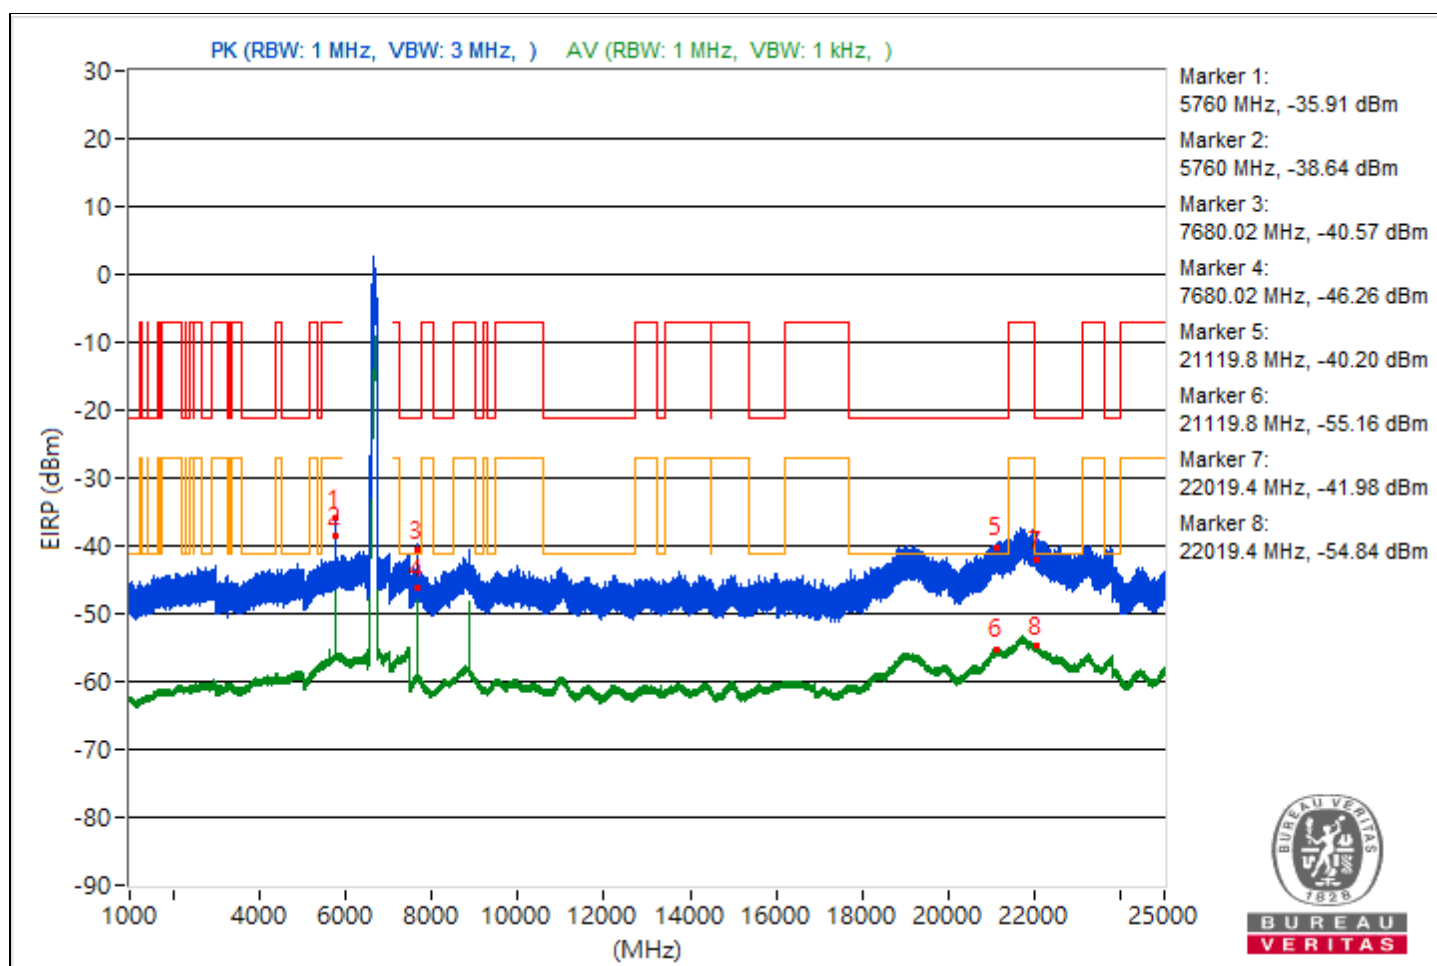


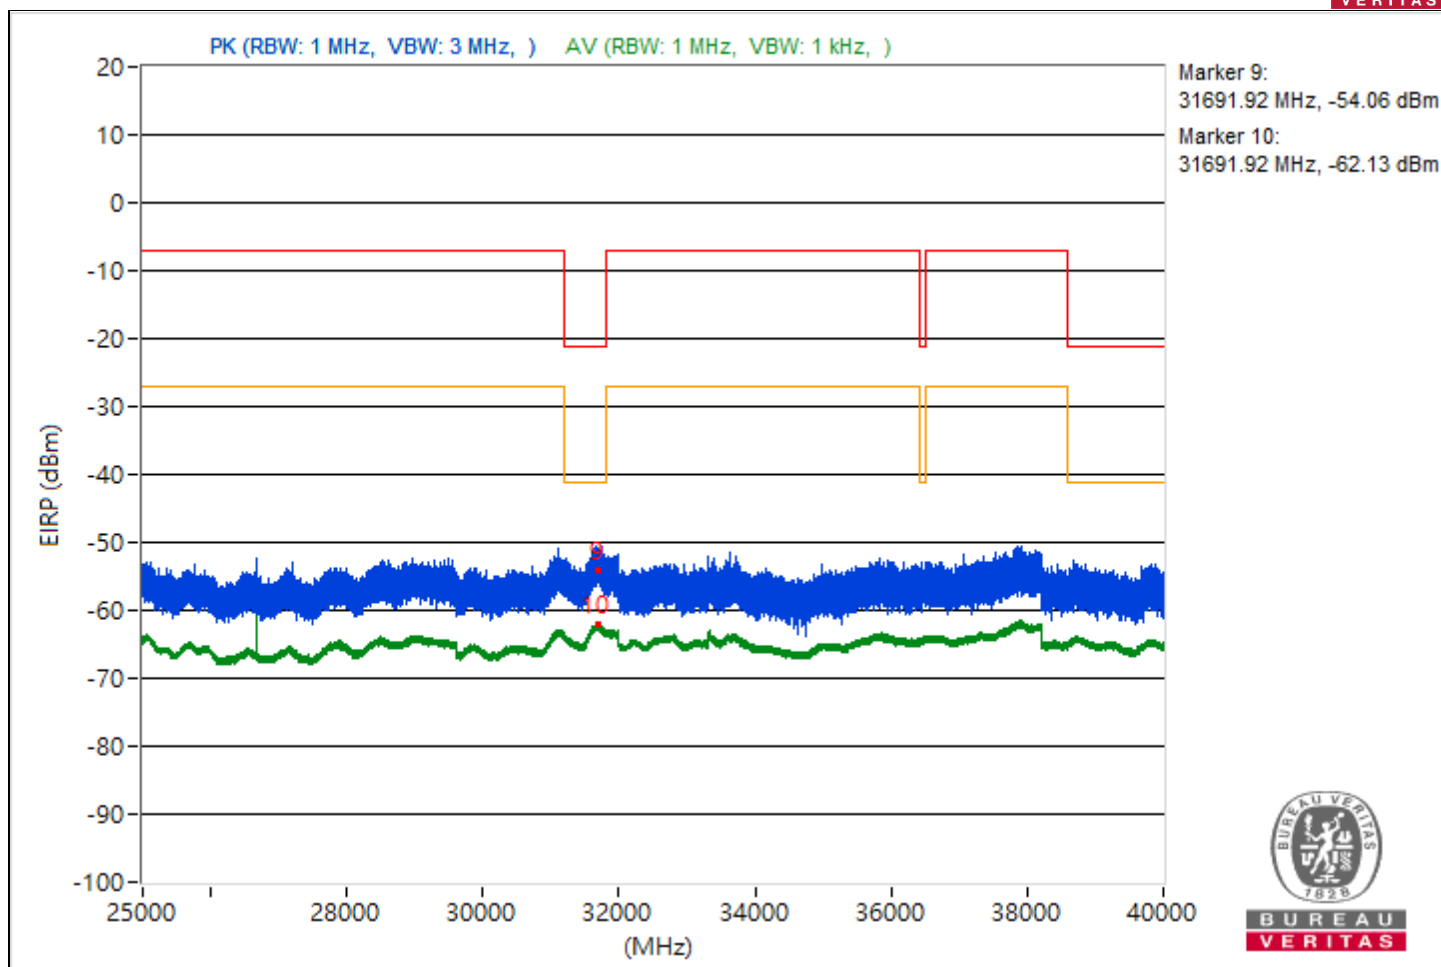


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5444.07	47.77 PK	74	-26.23	-58.47	-58.88	8.17	-47.49
2	5444.07	36.88 AV	54	-17.12	-69.88	-69.26	8.17	-58.38
3	7495.38	50.57 PK	74	-23.43	-55.39	-56.41	8.17	-44.69
4	7495.38	39.34 AV	54	-14.66	-66.79	-67.44	8.17	-55.92
5	19146.3	53.02 PK	74	-20.98	-52.42	-54.73	8.17	-42.24
6	19146.3	40.21 AV	54	-13.79	-66.65	-65.85	8.17	-55.05
7	22150.7	53.85 PK	74	-20.15	-53.72	-51.7	8.17	-41.41
8	22150.7	41.5 AV	54	-12.5	-64.67	-65.22	8.17	-53.76
9	31767.21	42.17 PK	74	-31.83	-64.08	-64.47	8.17	-53.09
10	31767.21	32.5 AV	54	-21.5	-74.23	-73.68	8.17	-62.76

Note: Margin value = Emission Level - Limit value

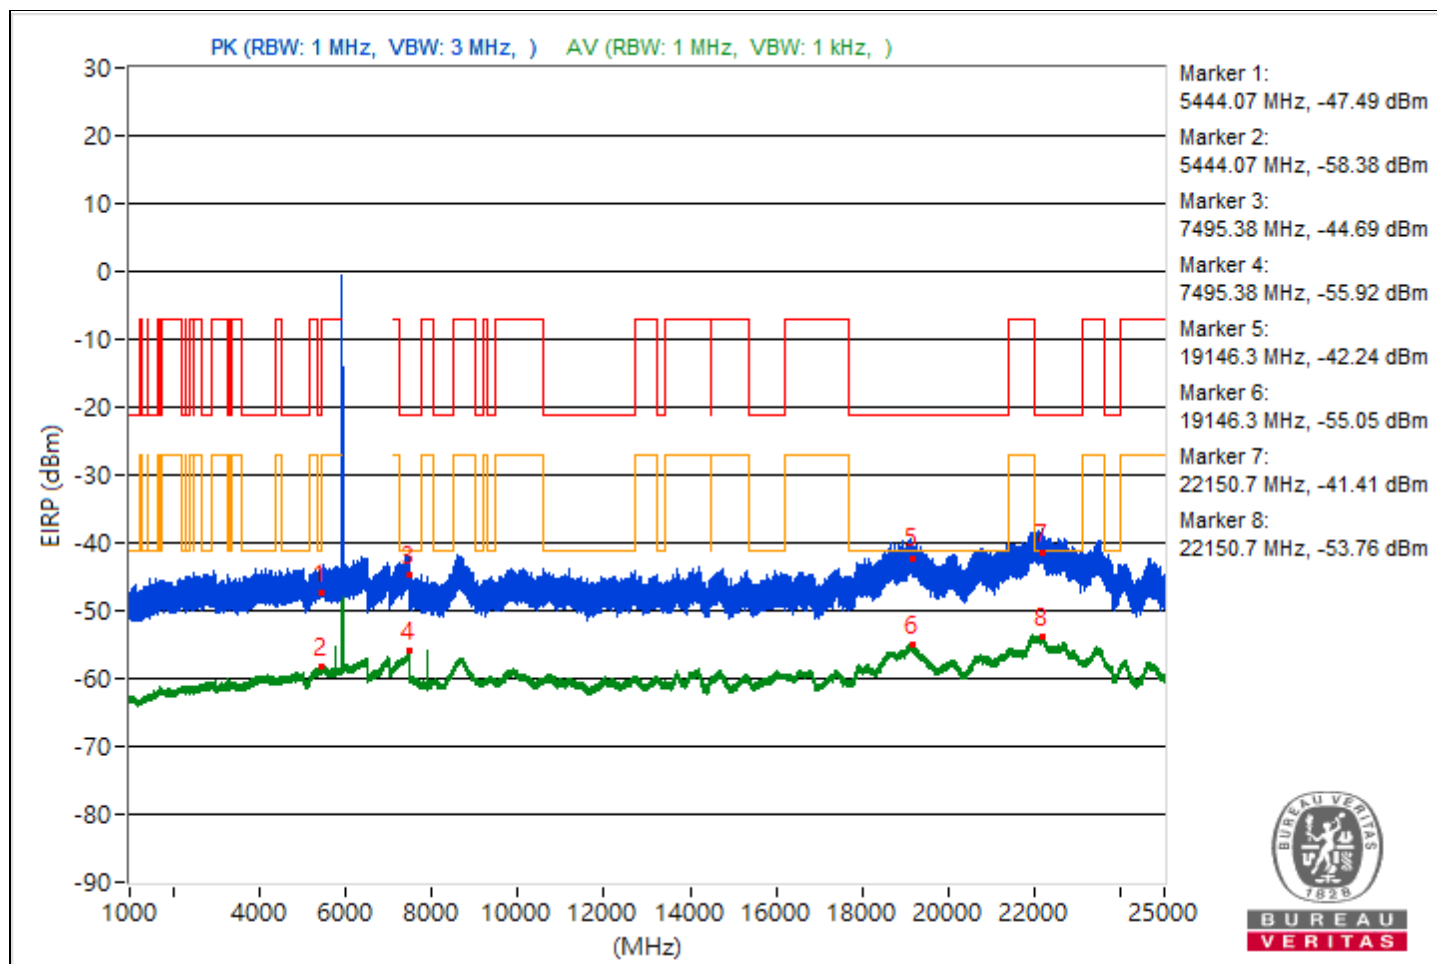


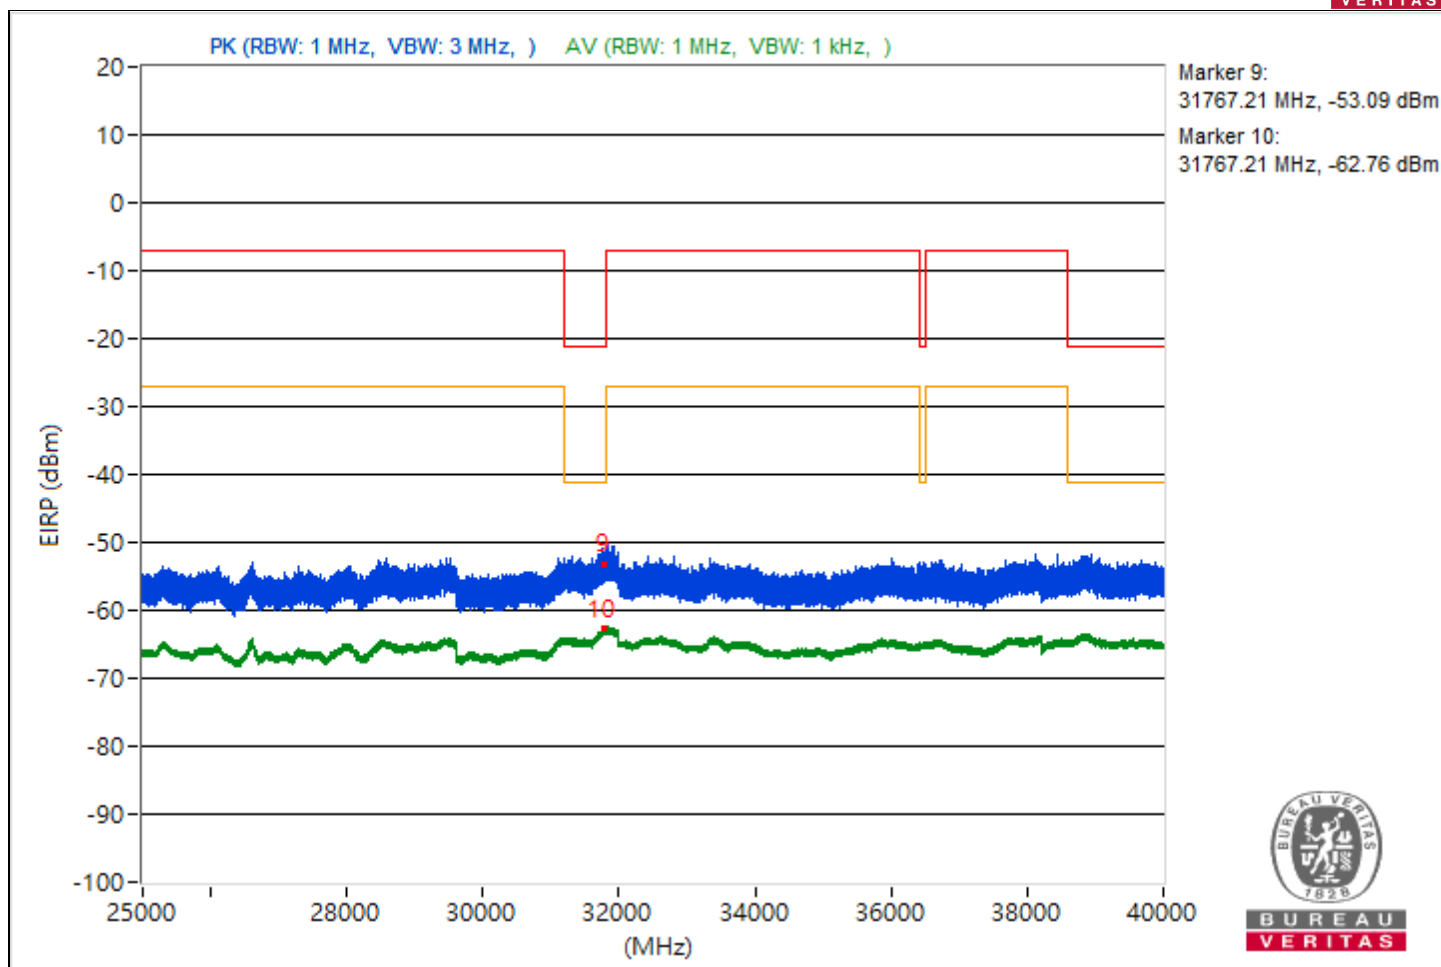


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5457.37	50.23 PK	74	-23.77	-57.26	-55.36	8.17	-45.03
2	5457.37	37.08 AV	54	-16.92	-69.8	-68.95	8.17	-58.18
3	7480.6	51.58 PK	74	-22.42	-54.69	-55.04	8.17	-43.68
4	7480.6	39.2 AV	54	-14.8	-67.57	-66.93	8.17	-56.06
5	19098	52.99 PK	74	-21.01	-52.97	-53.98	8.17	-42.27
6	19098	40.25 AV	54	-13.75	-66.37	-66.01	8.17	-55.01
7	22084.2	54.45 PK	74	-19.55	-51.84	-52.14	8.17	-40.81
8	22084.2	41.39 AV	54	-12.61	-65.36	-64.75	8.17	-53.87
9	31799.8	42.61 PK	74	-31.39	-65.19	-62.8	8.17	-52.65
10	31799.8	32.48 AV	54	-21.52	-73.69	-74.26	8.17	-62.78

Note: Margin value = Emission Level - Limit value

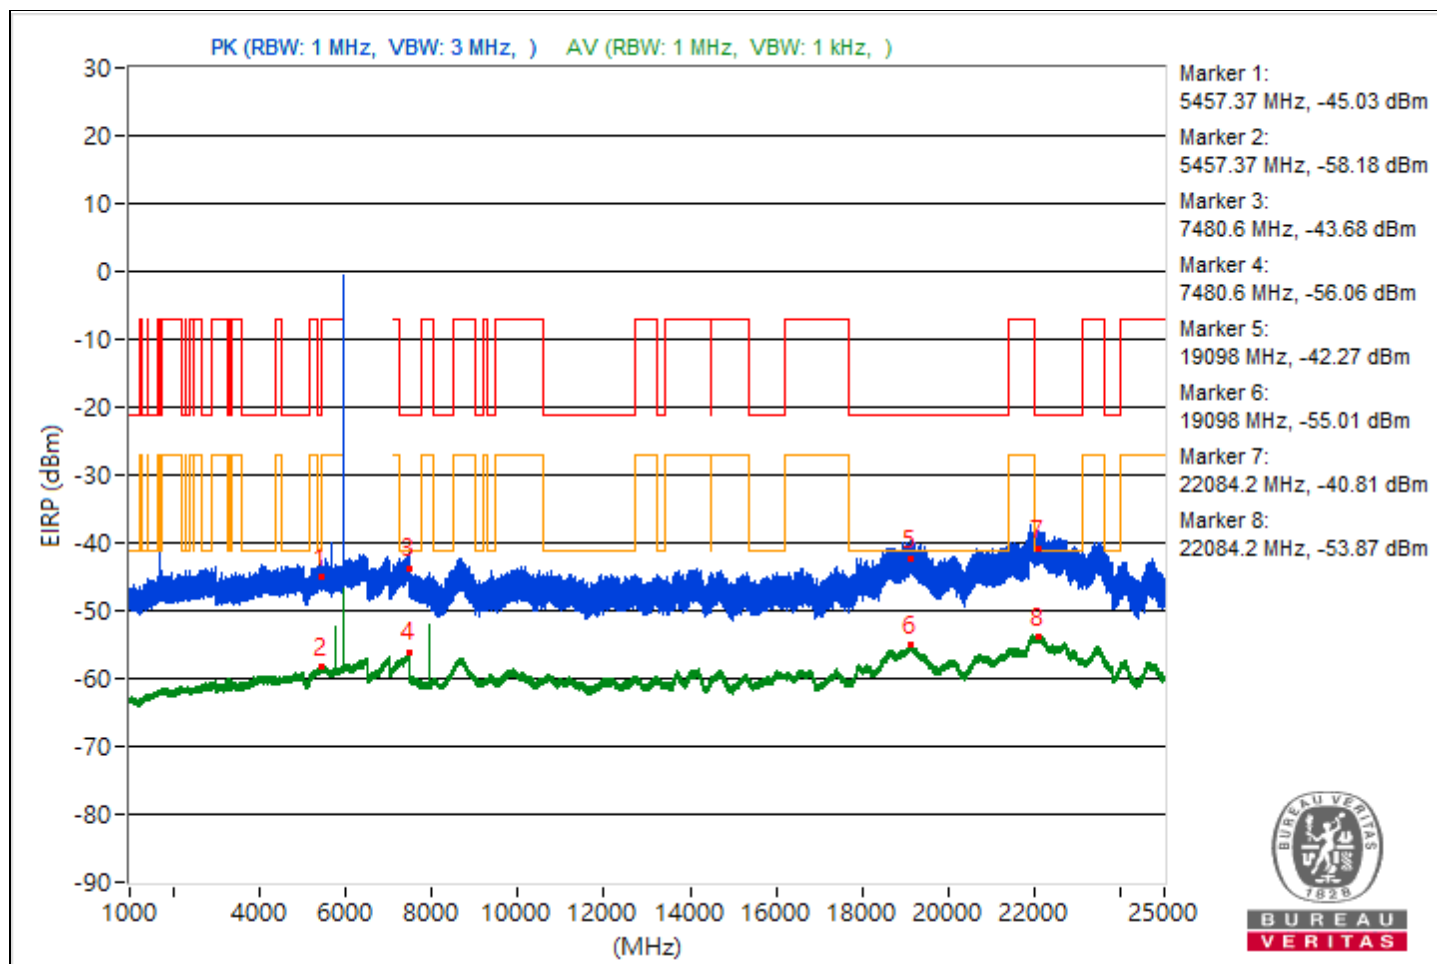


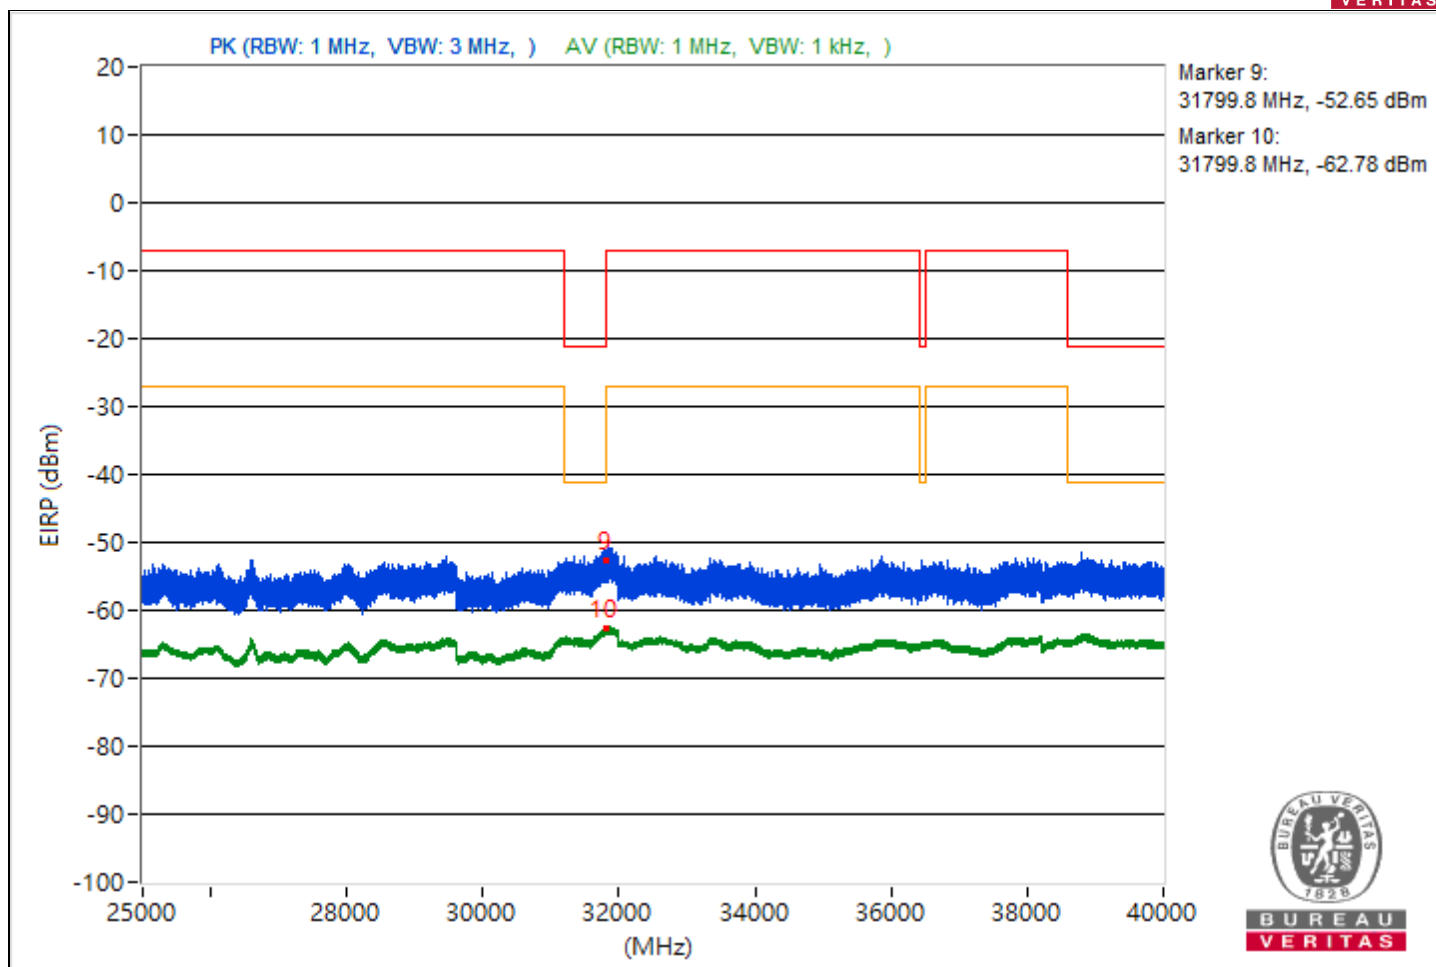


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5451.77	49.87 PK	74	-24.13	-57.26	-55.97	8.17	-45.39
2	5451.77	37.03 AV	54	-16.97	-69.71	-69.13	8.17	-58.23
3	8233.24	51.29 PK	74	-22.71	-55.3	-55	8.17	-43.97
4	8233.24	44.87 AV	54	-9.13	-61.02	-62.21	8.17	-50.39
5	19095.5	51.8 PK	74	-22.2	-54.98	-54.33	8.17	-43.46
6	19095.5	40.01 AV	54	-13.99	-66.03	-66.87	8.17	-55.25
7	22097.4	53.92 PK	74	-20.08	-52.55	-52.49	8.17	-41.34
8	22097.4	41.52 AV	54	-12.48	-65.21	-64.65	8.17	-53.74
9	31768.38	40.7 PK	74	-33.3	-66.42	-65.15	8.17	-54.56
10	31768.38	32.37 AV	54	-21.63	-73.8	-74.37	8.17	-62.89

Note: Margin value = Emission Level - Limit value

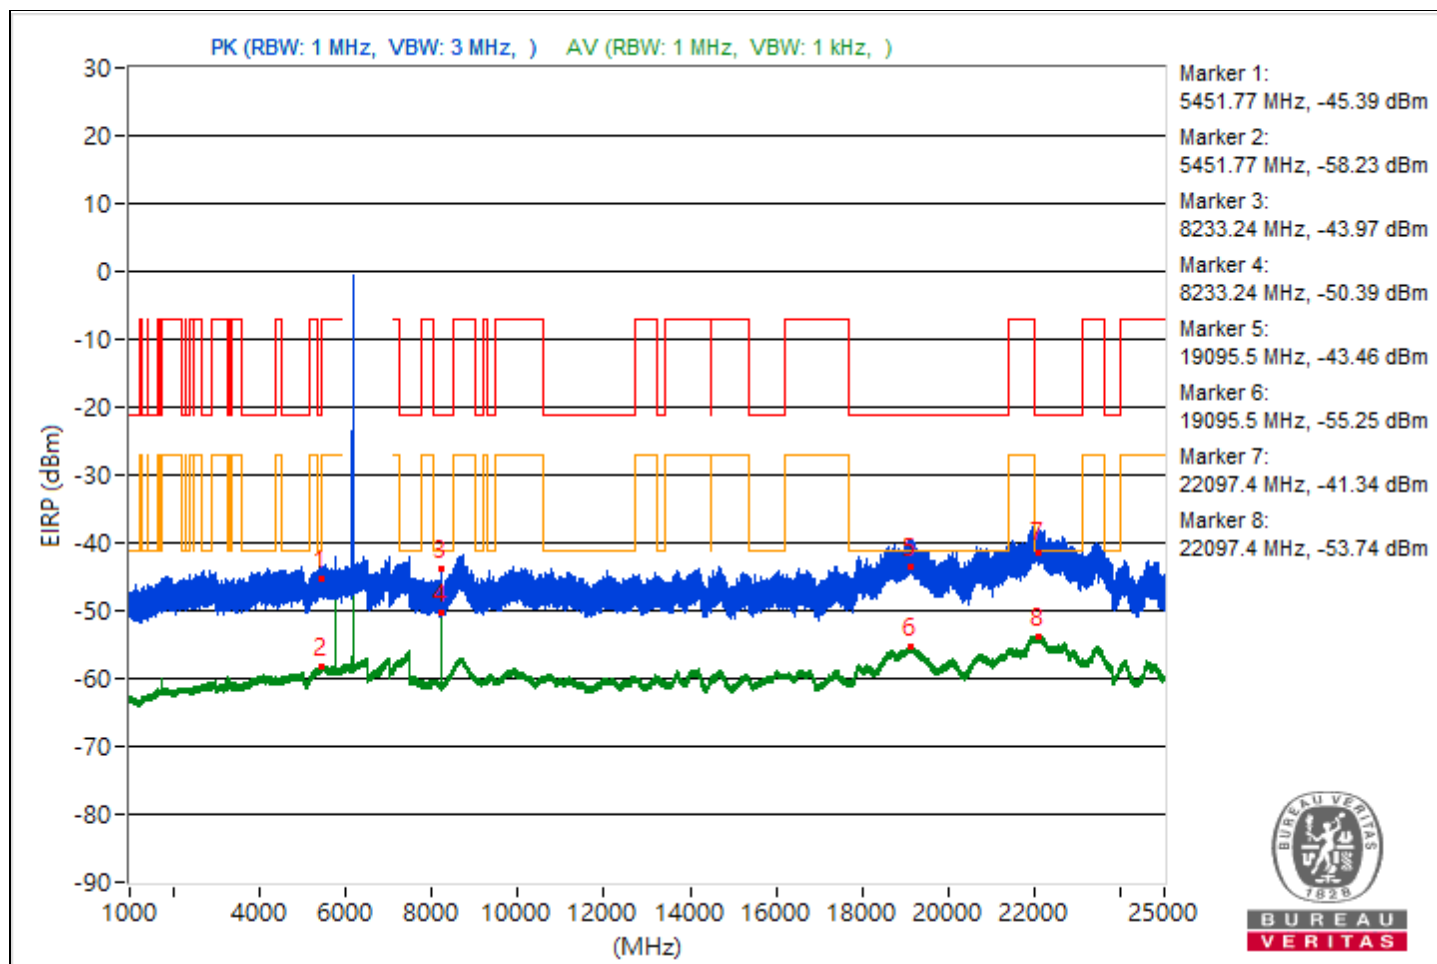


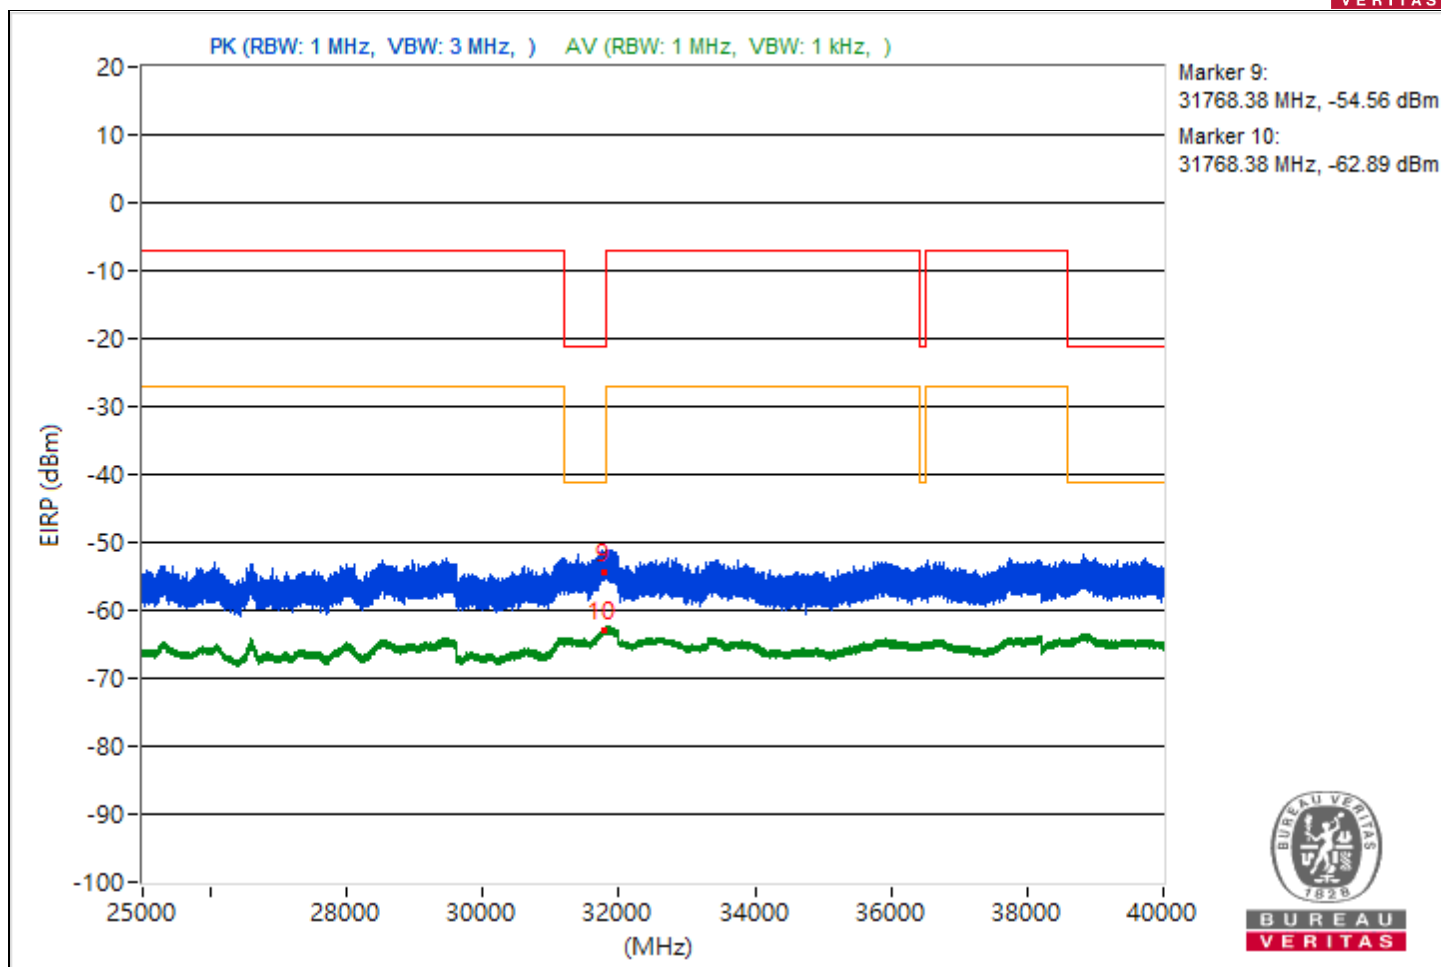


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5456.04	48.59 PK	74	-25.41	-57.8	-57.91	8.17	-46.67
2	5456.04	37.08 AV	54	-16.92	-69.01	-69.75	8.17	-58.18
3	7488.53	51.22 PK	74	-22.78	-55.98	-54.58	8.17	-44.04
4	7488.53	39.32 AV	54	-14.68	-67.55	-66.74	8.17	-55.94
5	19102.8	51.73 PK	74	-22.27	-54.36	-55.11	8.17	-43.53
6	19102.8	40.35 AV	54	-13.65	-66.27	-65.92	8.17	-54.91
7	22039.5	53.72 PK	74	-20.28	-52.27	-53.22	8.17	-41.54
8	22039.5	41.3 AV	54	-12.7	-65.53	-64.79	8.17	-53.96
9	31791.56	42.15 PK	74	-31.85	-64.89	-63.77	8.17	-53.11
10	31791.56	32.41 AV	54	-21.59	-73.67	-74.42	8.17	-62.85

Note: Margin value = Emission Level - Limit value

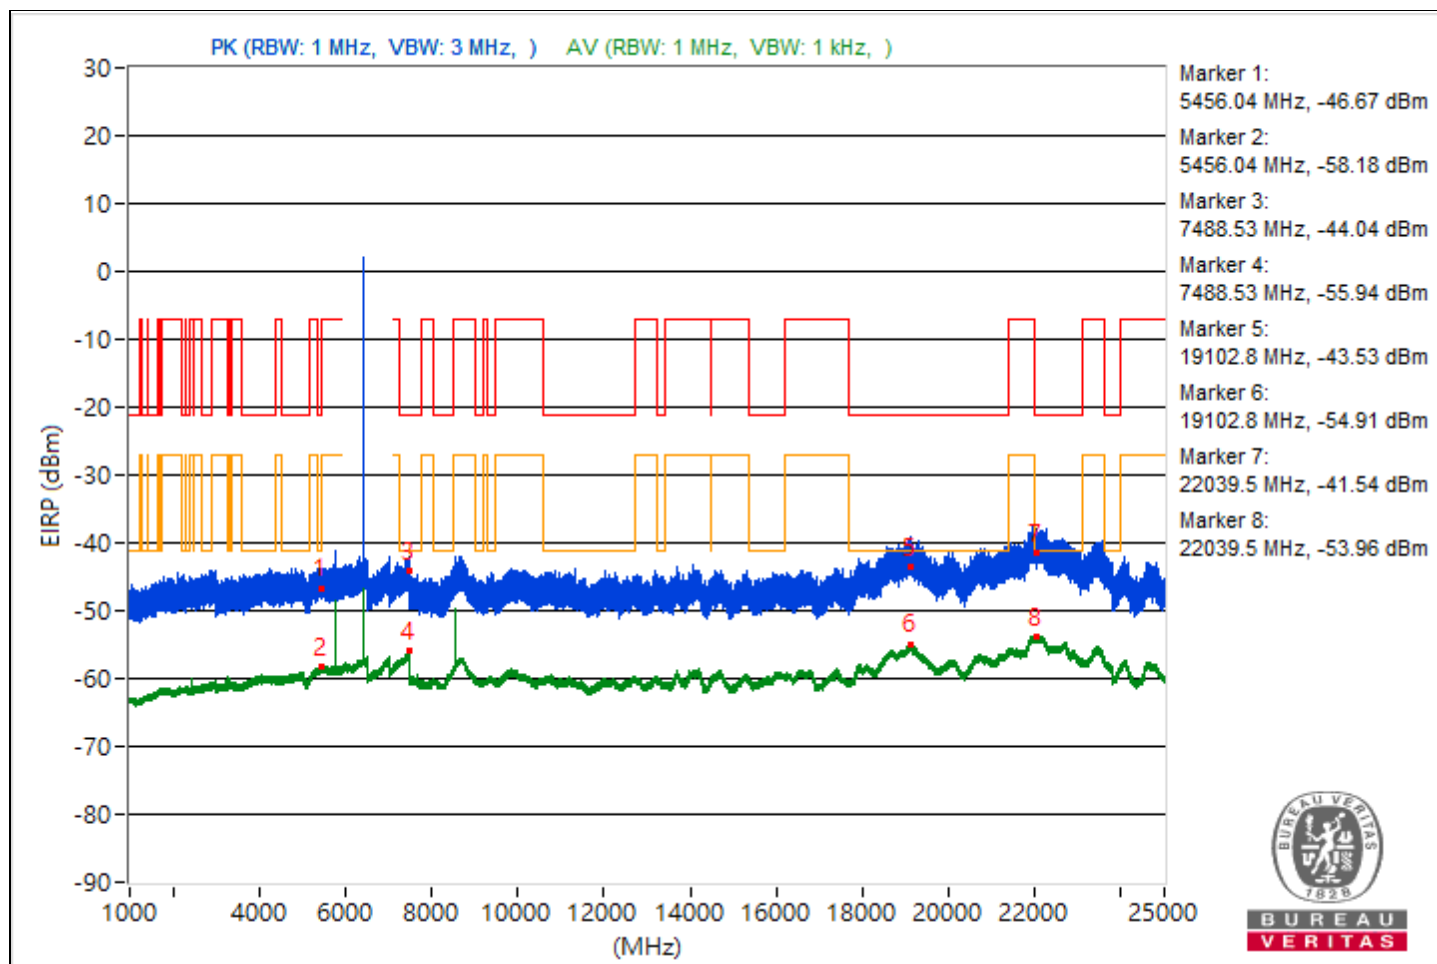


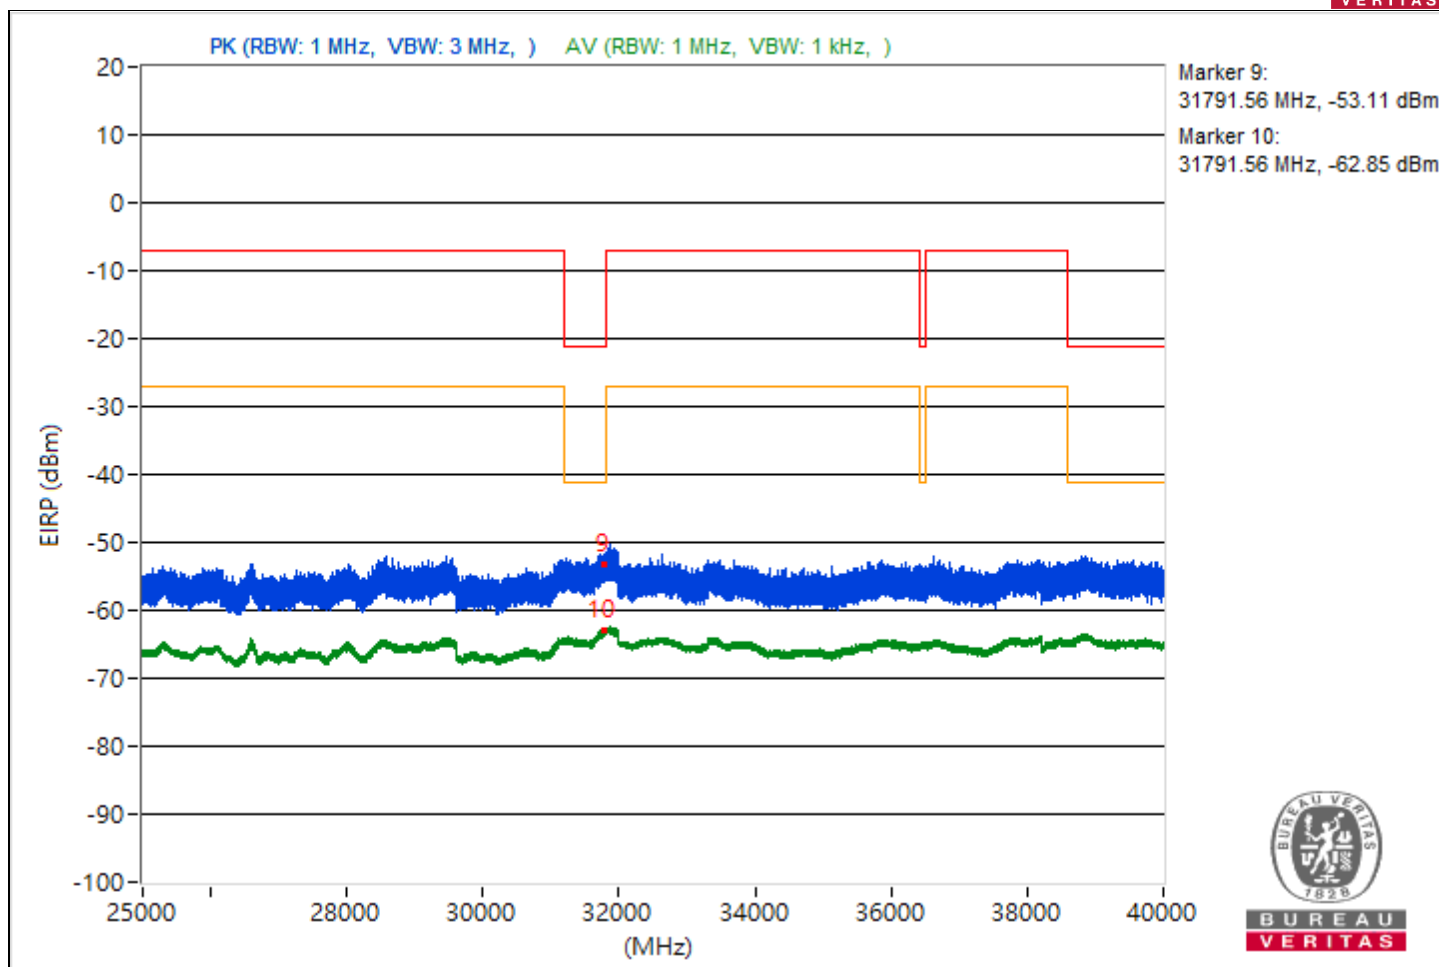


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5446.4	49.5 PK	74	-24.5	-57.37	-56.55	8.17	-45.76
2	5446.4	37.26 AV	54	-16.74	-69.04	-69.32	8.17	-58
3	7499.34	50.29 PK	74	-23.71	-55.27	-57.26	8.17	-44.97
4	7499.34	39.21 AV	54	-14.79	-66.88	-67.61	8.17	-56.05
5	19101.2	51.22 PK	74	-22.78	-55.5	-54.95	8.17	-44.04
6	19101.2	40.09 AV	54	-13.91	-65.93	-66.83	8.17	-55.17
7	22079.2	55.5 PK	74	-18.5	-51.98	-50.11	8.17	-39.76
8	22079.2	41.32 AV	54	-12.68	-65.46	-64.8	8.17	-53.94
9	31788.44	40.43 PK	74	-33.57	-66.47	-65.6	8.17	-54.83
10	31788.44	32.49 AV	54	-21.51	-74.35	-73.58	8.17	-62.77

Note: Margin value = Emission Level - Limit value

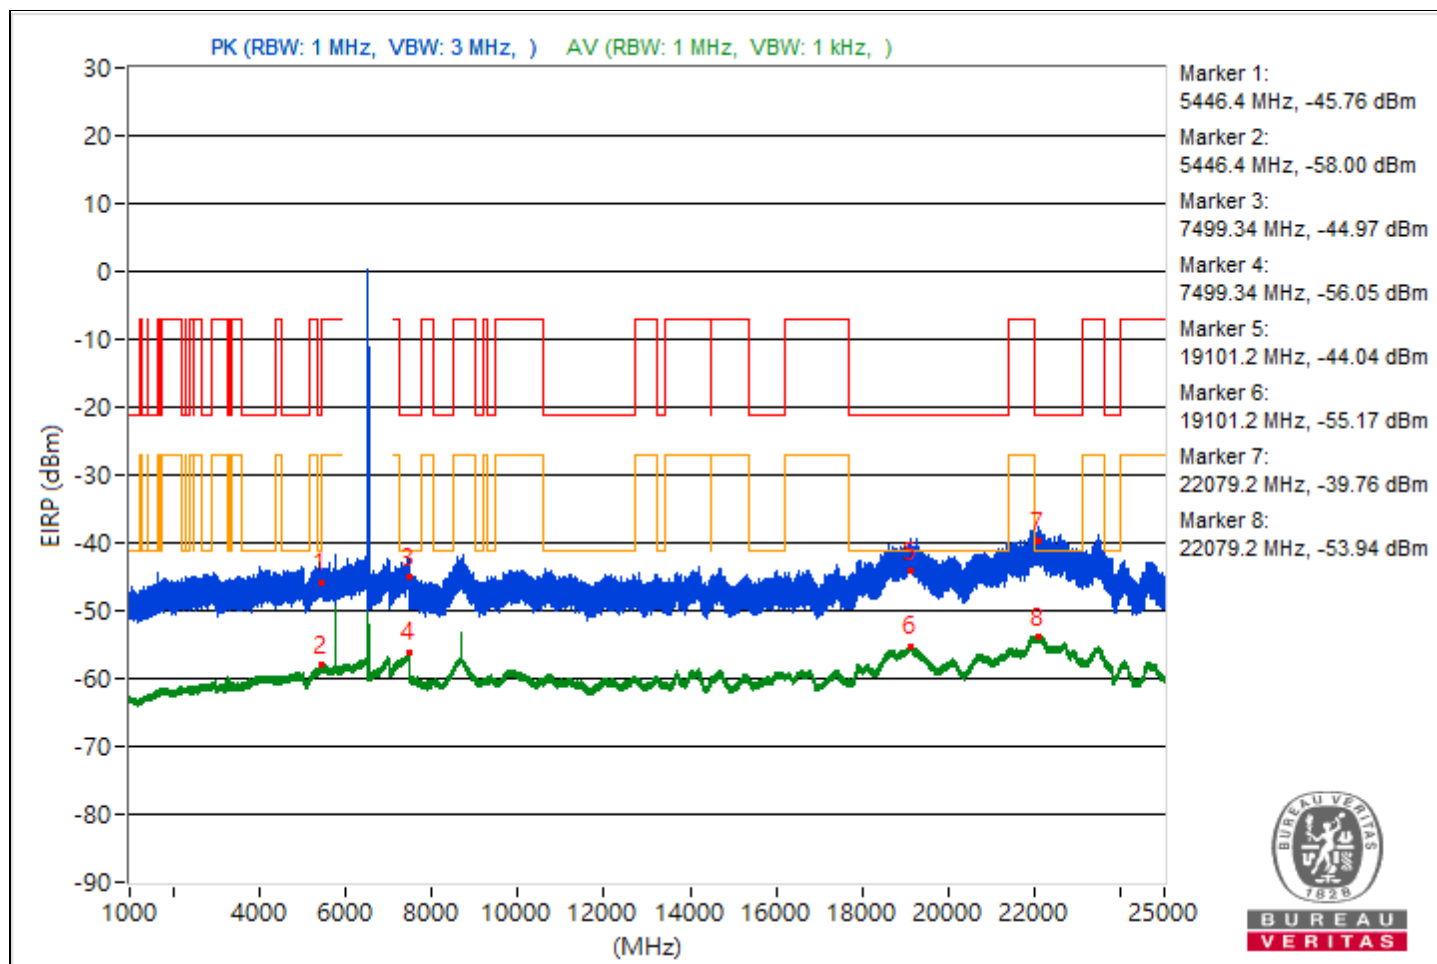


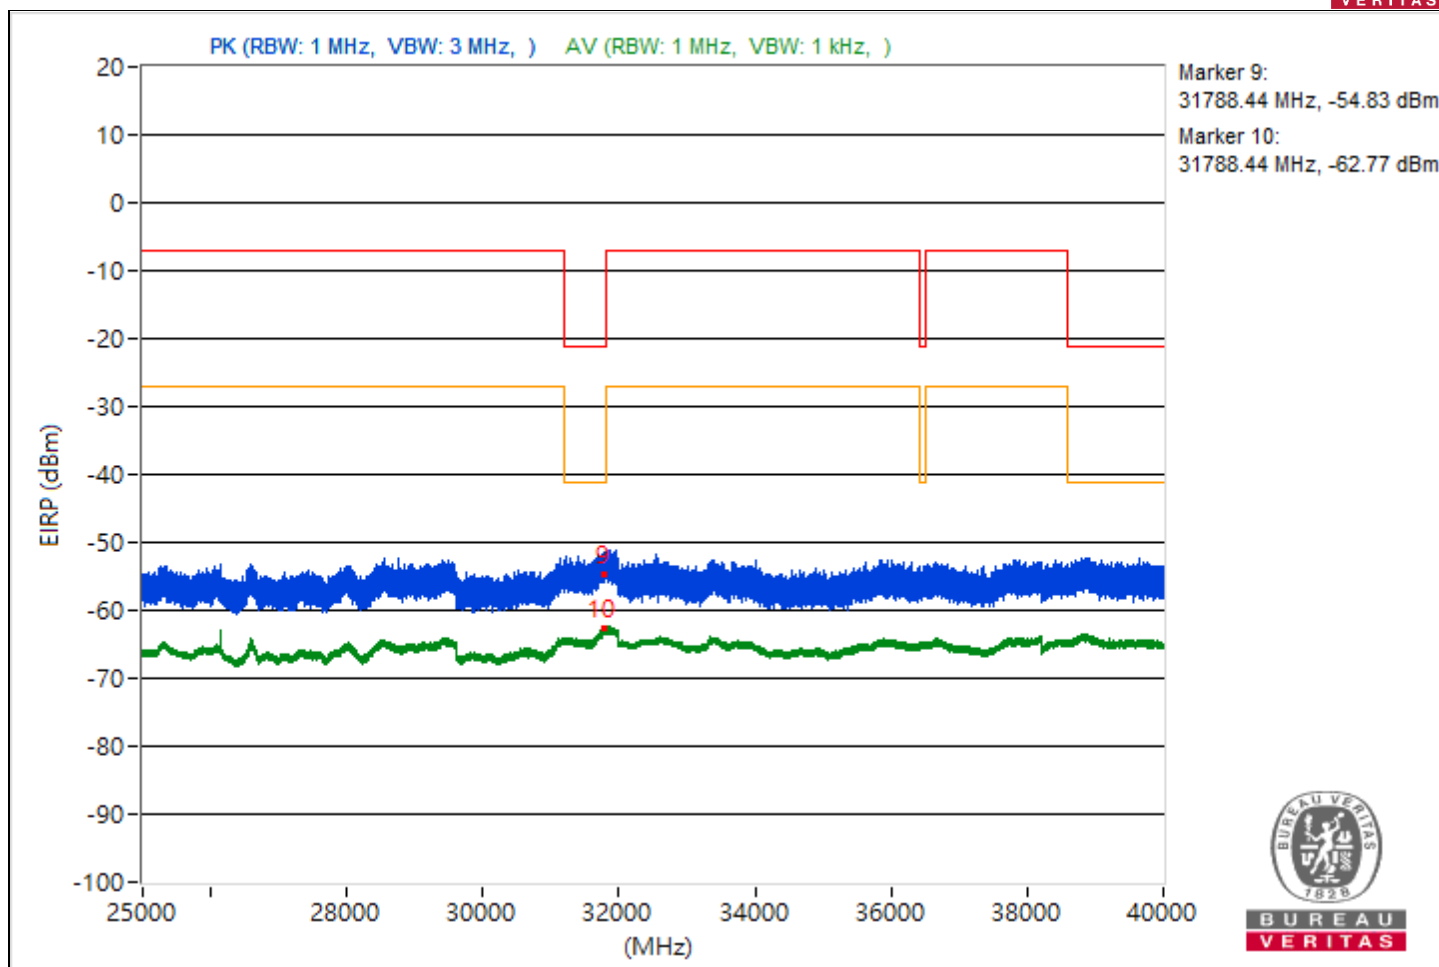


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5433.18	48.35 PK	74	-25.65	-57.53	-58.74	8.17	-46.91
2	5433.18	36.99 AV	54	-17.01	-69.59	-69.31	8.17	-58.27
3	7487.83	50.9 PK	74	-23.1	-54.81	-56.43	8.17	-44.36
4	7487.83	39.35 AV	54	-14.65	-67.37	-66.82	8.17	-55.91
5	19102.7	53.8 PK	74	-20.2	-53.32	-52.04	8.17	-41.46
6	19102.7	40.11 AV	54	-13.89	-66.08	-66.6	8.17	-55.15
7	22089.6	54.61 PK	74	-19.39	-52.43	-51.31	8.17	-40.65
8	22089.6	41.41 AV	54	-12.59	-65.29	-64.79	8.17	-53.85
9	31795.21	41.61 PK	74	-32.39	-63.79	-66.21	8.17	-53.65
10	31795.21	32.74 AV	54	-21.26	-73.94	-73.47	8.17	-62.52

Note: Margin value = Emission Level - Limit value

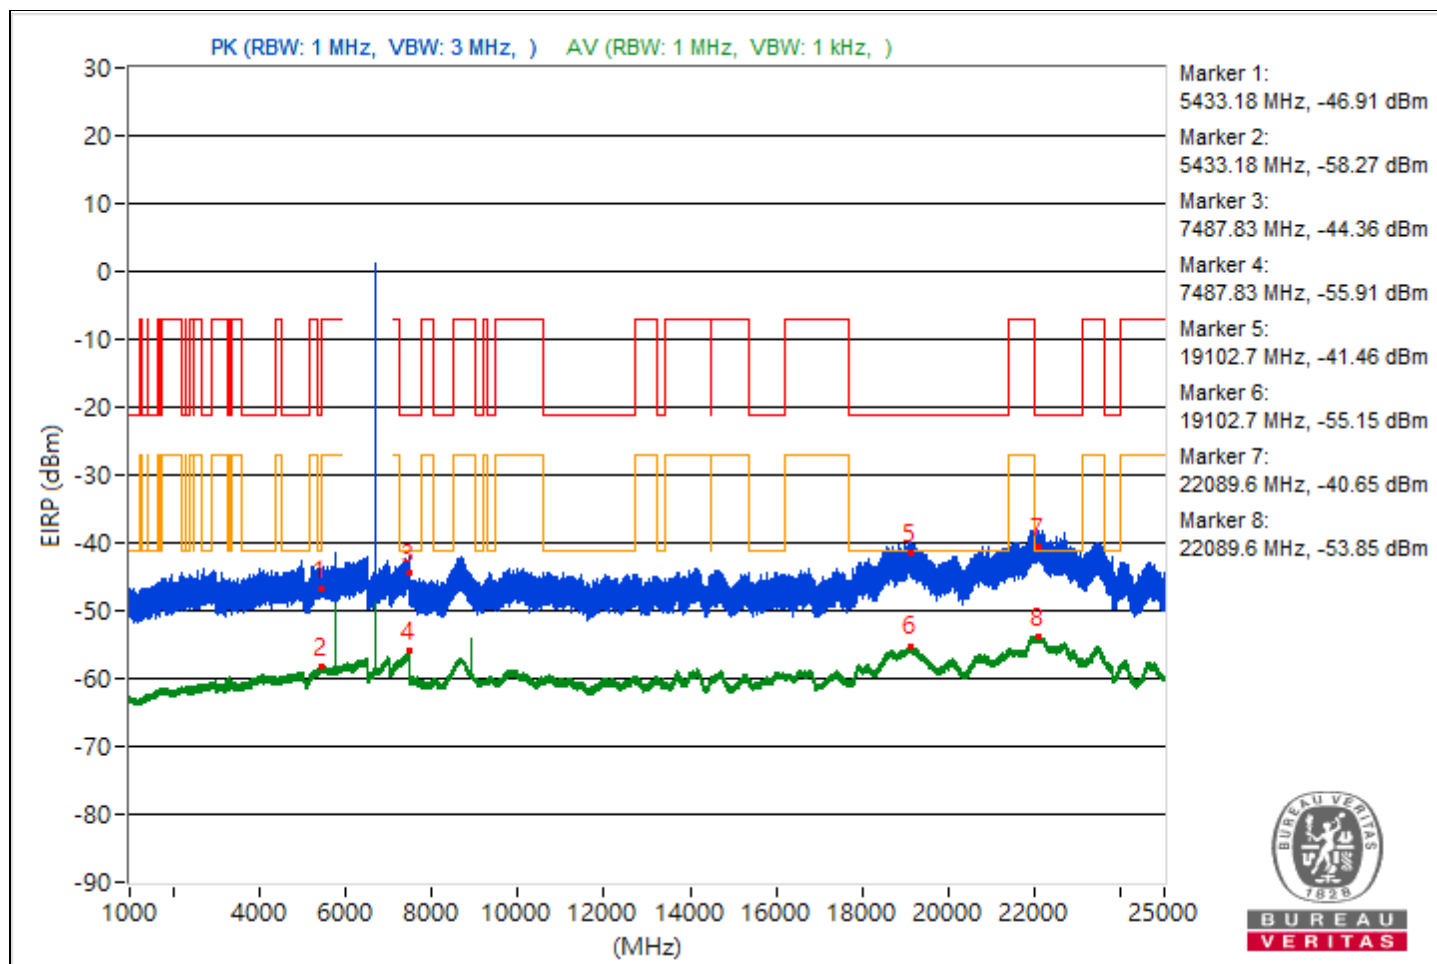


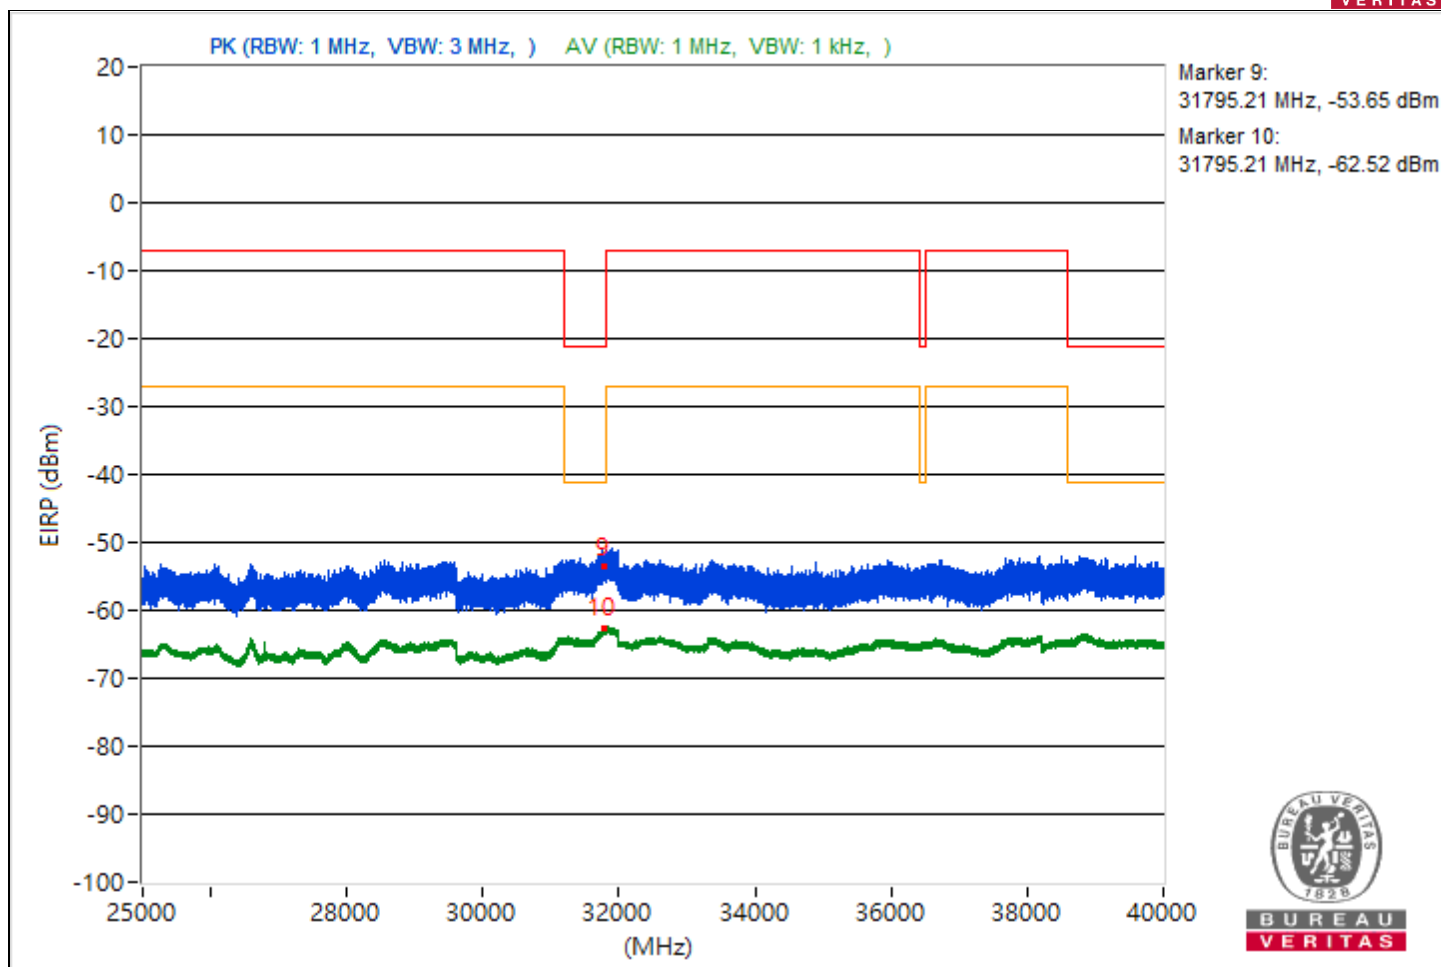


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5415.06	51.18 PK	74	-22.82	-55.76	-54.81	8.17	-44.08
2	5415.06	37 AV	54	-17	-69.95	-68.99	8.17	-58.26
3	8225.96	51.82 PK	74	-22.18	-53.1	-56.99	8.17	-43.44
4	8225.96	47.63 AV	54	-6.37	-56.75	-62.83	8.17	-47.63
5	19087.2	53.37 PK	74	-20.63	-53.13	-53.01	8.17	-41.89
6	19087.2	40.15 AV	54	-13.85	-66.09	-66.49	8.17	-55.11
7	22027.2	54.71 PK	74	-19.29	-50.91	-52.75	8.17	-40.55
8	22027.2	41.5 AV	54	-12.5	-65.14	-64.75	8.17	-53.76
9	31780.82	41.47 PK	74	-32.53	-63.92	-66.37	8.17	-53.79
10	31780.82	32.42 AV	54	-21.58	-74.36	-73.71	8.17	-62.84

Note: Margin value = Emission Level - Limit value

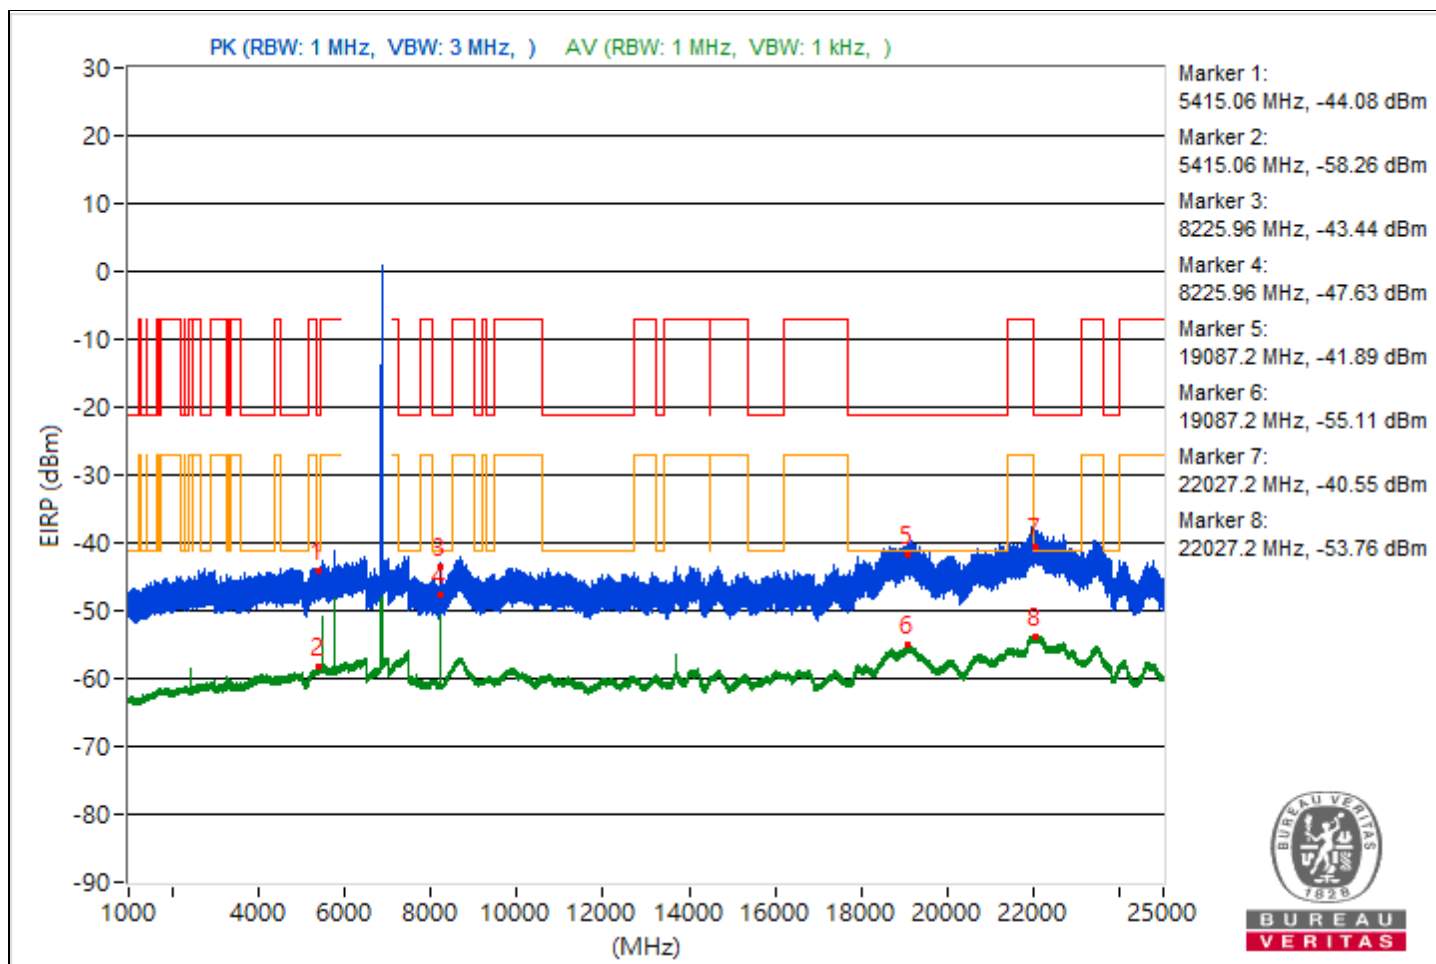


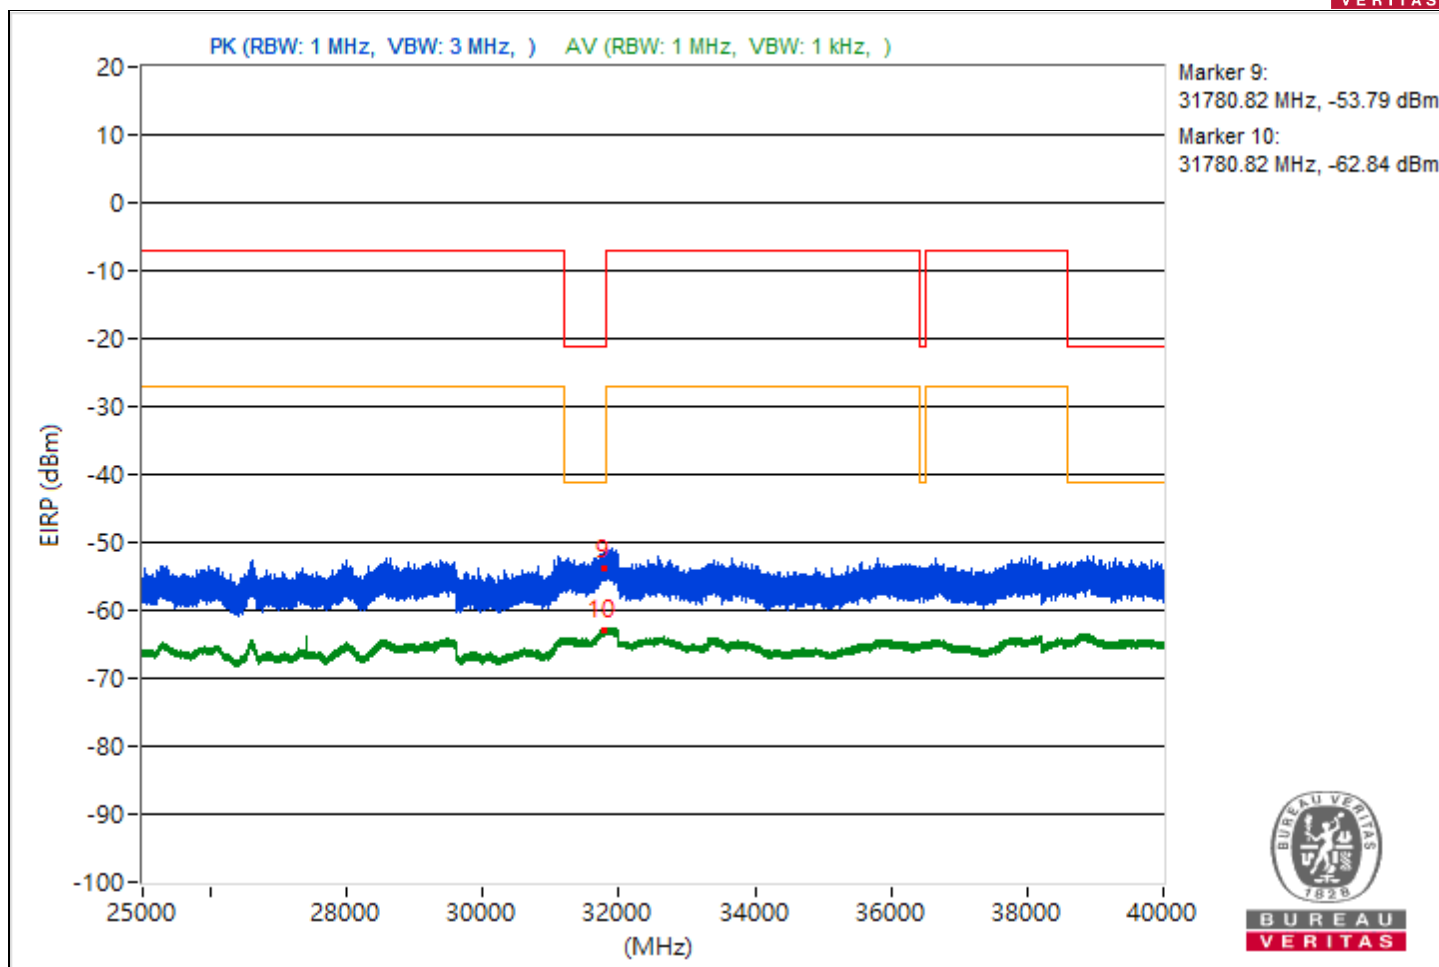


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5454.49	49.02 PK	74	-24.98	-57.18	-57.67	8.17	-46.24
2	5454.49	37.15 AV	54	-16.85	-69.55	-69.04	8.17	-58.11
3	7479.04	50.37 PK	74	-23.63	-56.32	-55.83	8.17	-44.89
4	7479.04	39.27 AV	54	-14.73	-67.34	-67.01	8.17	-55.99
5	19102.7	52.12 PK	74	-21.88	-54.18	-54.47	8.17	-43.14
6	19102.7	40.09 AV	54	-13.91	-66.04	-66.69	8.17	-55.17
7	22039.5	54.66 PK	74	-19.34	-52.12	-51.45	8.17	-40.6
8	22039.5	41.53 AV	54	-12.47	-65.1	-64.73	8.17	-53.73
9	31796.61	41.47 PK	74	-32.53	-64.73	-65.23	8.17	-53.79
10	31796.61	32.65 AV	54	-21.35	-74.15	-73.46	8.17	-62.61

Note: Margin value = Emission Level - Limit value

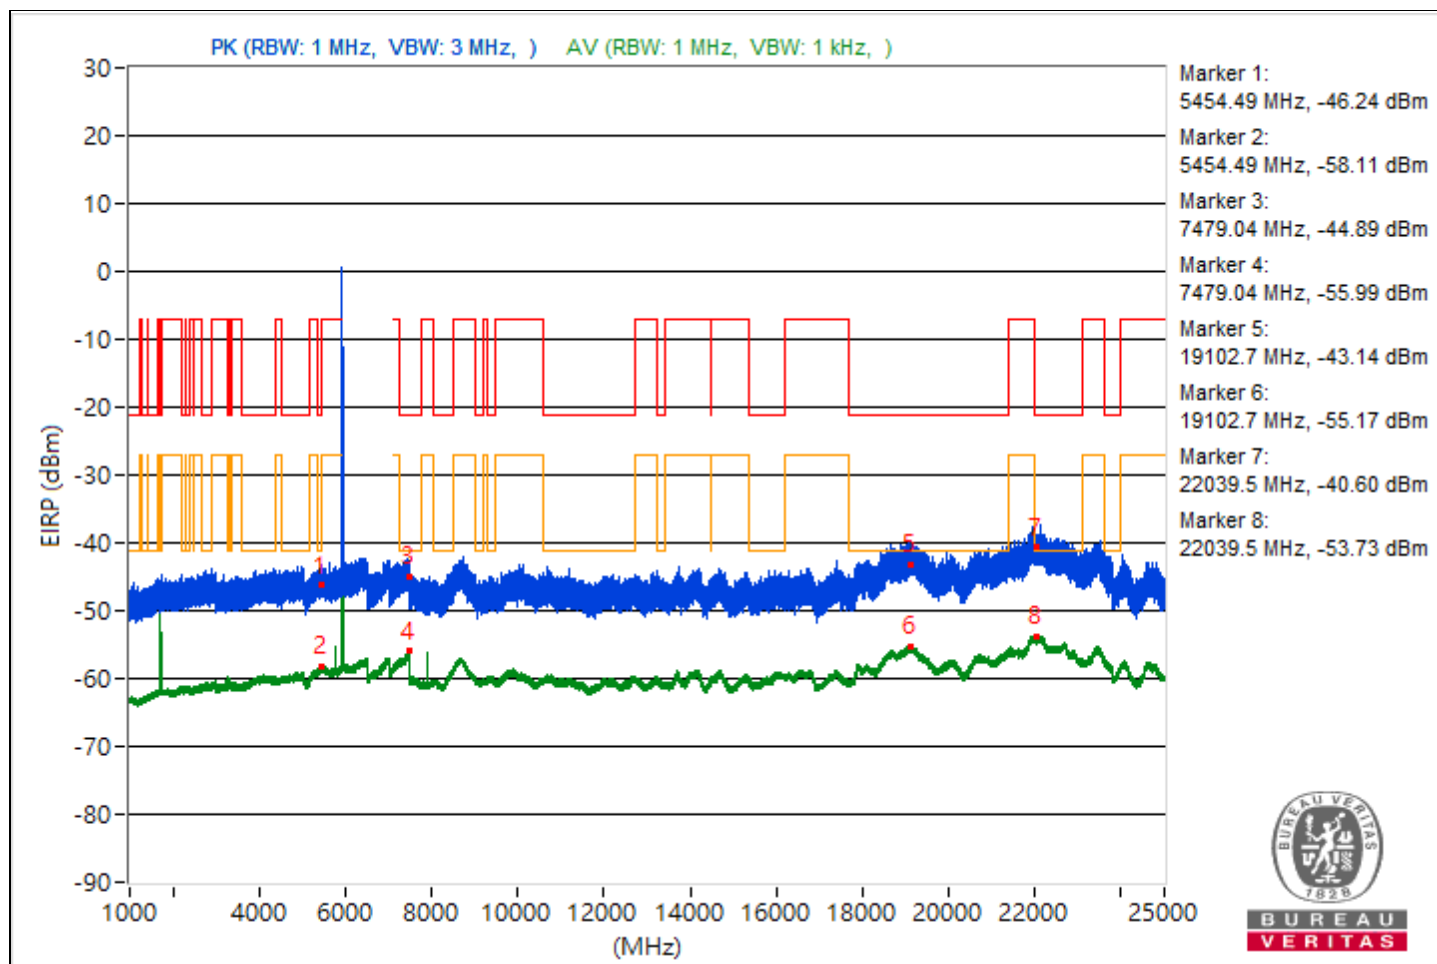


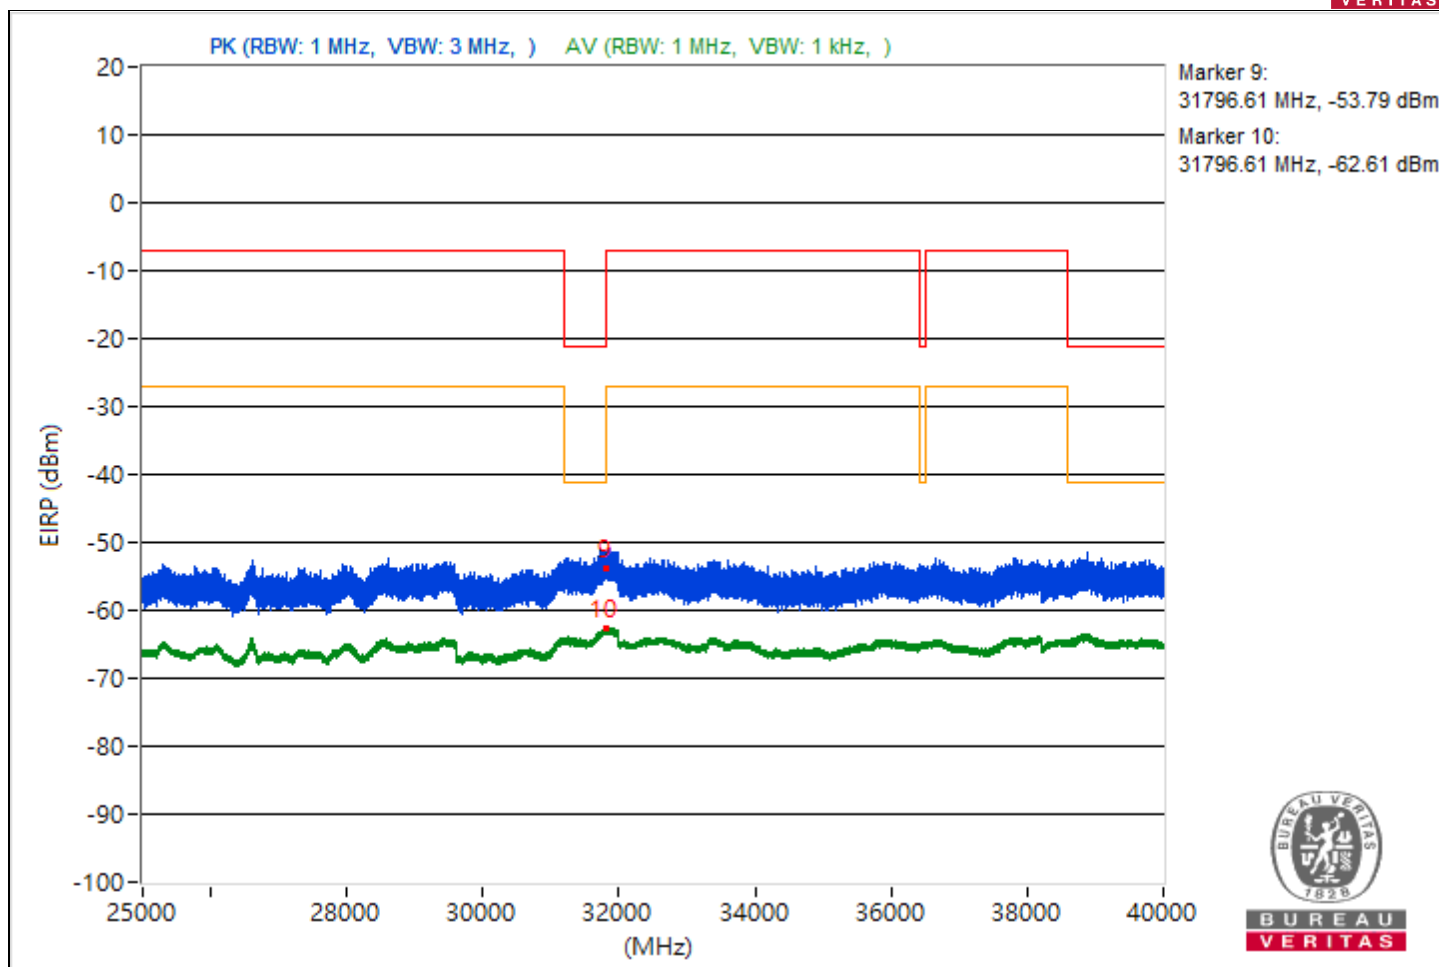


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5421.51	48.1 PK	74	-25.9	-59.12	-57.68	8.17	-47.16
2	5421.51	37.08 AV	54	-16.92	-69.68	-69.06	8.17	-58.18
3	7479.36	51.1 PK	74	-22.9	-53.94	-57.41	8.17	-44.16
4	7479.36	39.2 AV	54	-14.8	-66.88	-67.63	8.17	-56.06
5	19131	52.87 PK	74	-21.13	-53.41	-53.73	8.17	-42.39
6	19131	40.23 AV	54	-13.77	-66.64	-65.83	8.17	-55.03
7	22060.8	54.74 PK	74	-19.26	-51.82	-51.58	8.17	-40.52
8	22060.8	41.43 AV	54	-12.57	-65.49	-64.59	8.17	-53.83
9	31767.6	41.43 PK	74	-32.57	-65.93	-64.25	8.17	-53.83
10	31767.6	32.53 AV	54	-21.47	-74.11	-73.72	8.17	-62.73

Note: Margin value = Emission Level - Limit value

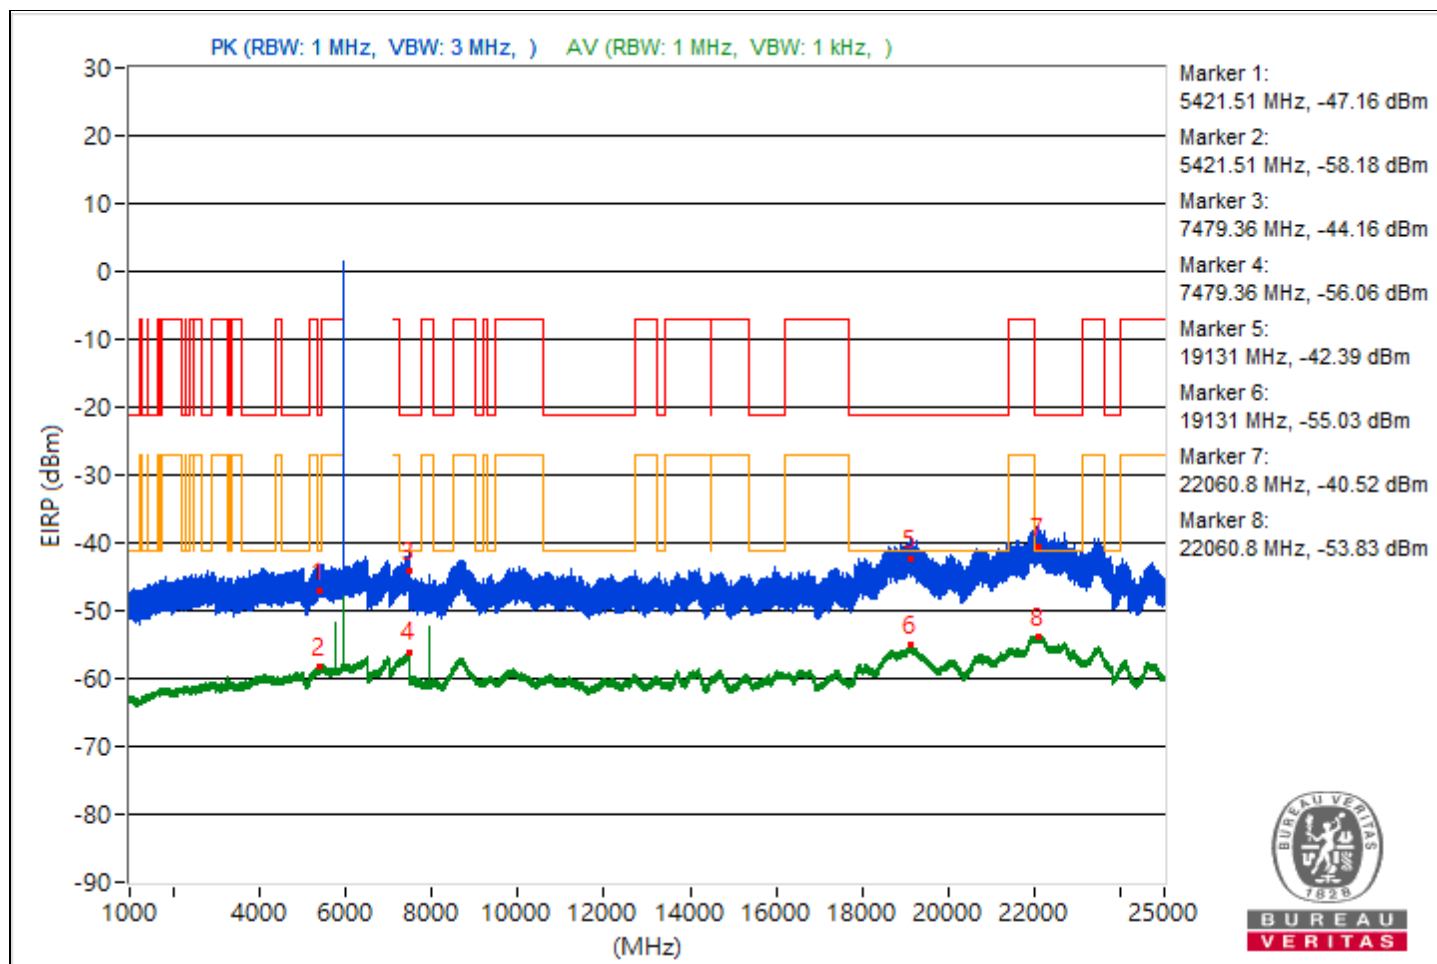


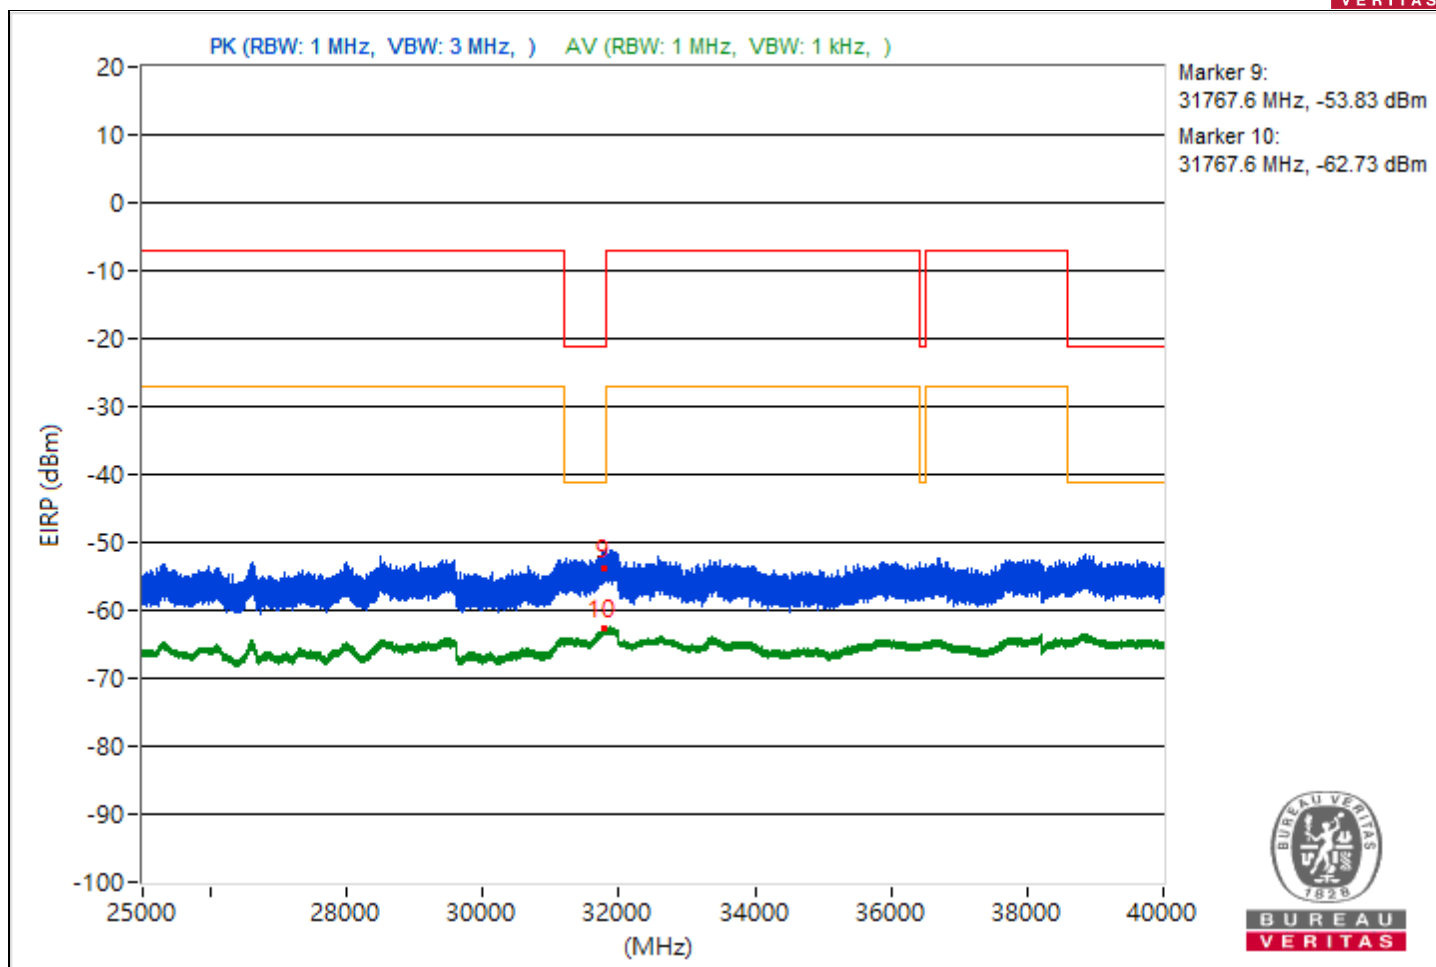


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5453.09	49.65 PK	74	-24.35	-58.21	-55.73	8.17	-45.61
2	5453.09	37.3 AV	54	-16.7	-69.3	-68.98	8.17	-57.96
3	8233.24	51.55 PK	74	-22.45	-55.8	-54.13	8.17	-43.71
4	8233.24	45.29 AV	54	-8.71	-60.92	-61.4	8.17	-49.97
5	19098.8	53.45 PK	74	-20.55	-54.42	-51.92	8.17	-41.81
6	19098.8	40.1 AV	54	-13.9	-66.76	-65.96	8.17	-55.16
7	22078.2	54.57 PK	74	-19.43	-52	-51.74	8.17	-40.69
8	22078.2	41.46 AV	54	-12.54	-65.35	-64.64	8.17	-53.8
9	31781.68	41.41 PK	74	-32.59	-64.7	-65.38	8.17	-53.85
10	31781.68	32.69 AV	54	-21.31	-74.26	-73.29	8.17	-62.57

Note: Margin value = Emission Level - Limit value

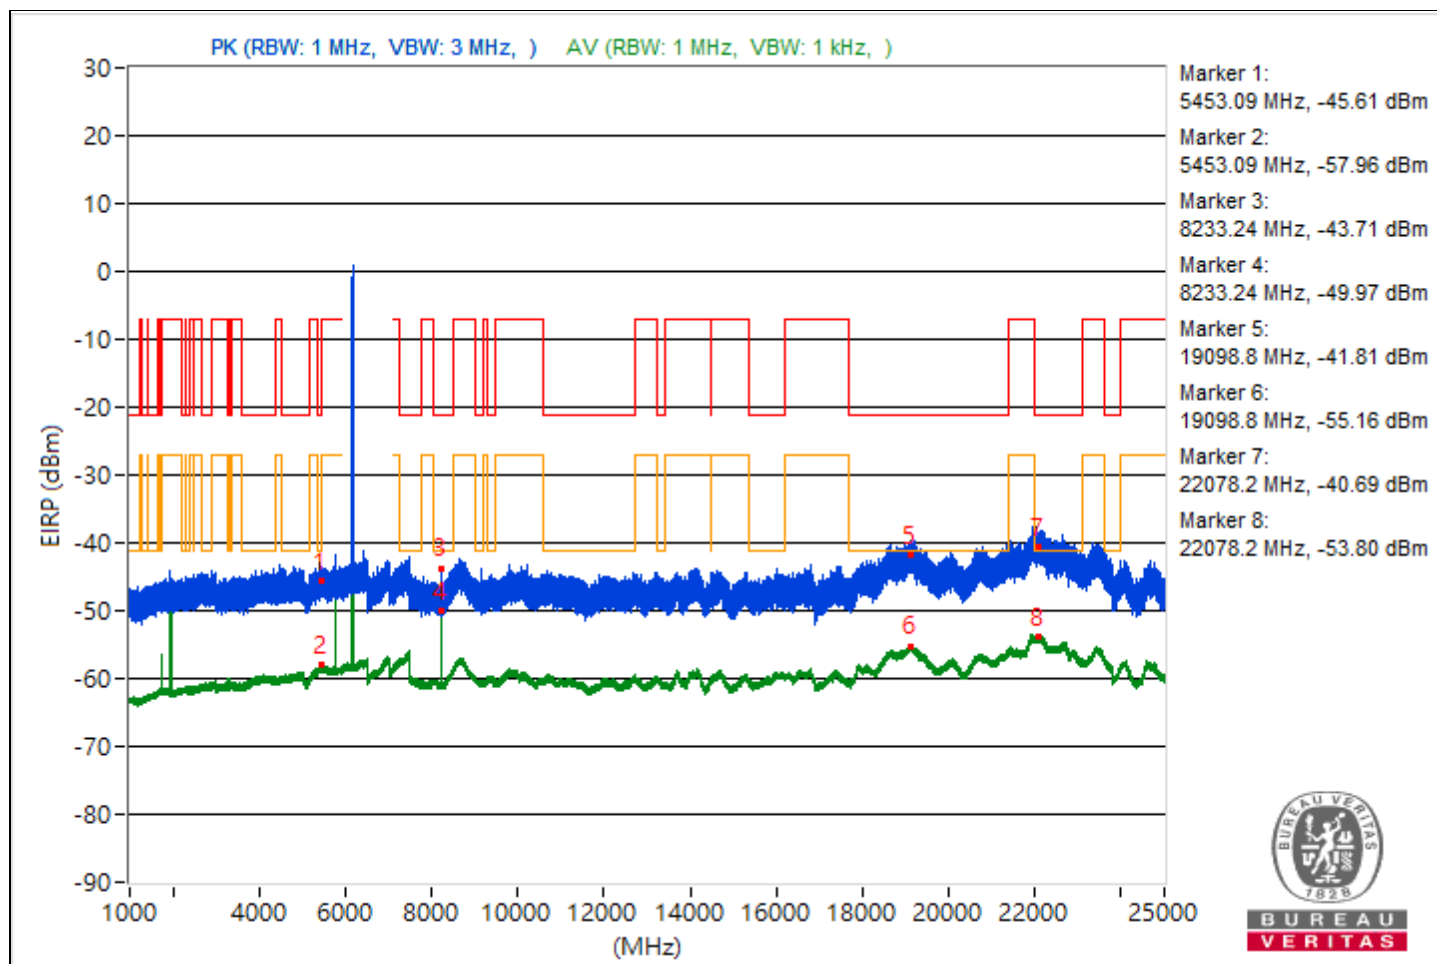


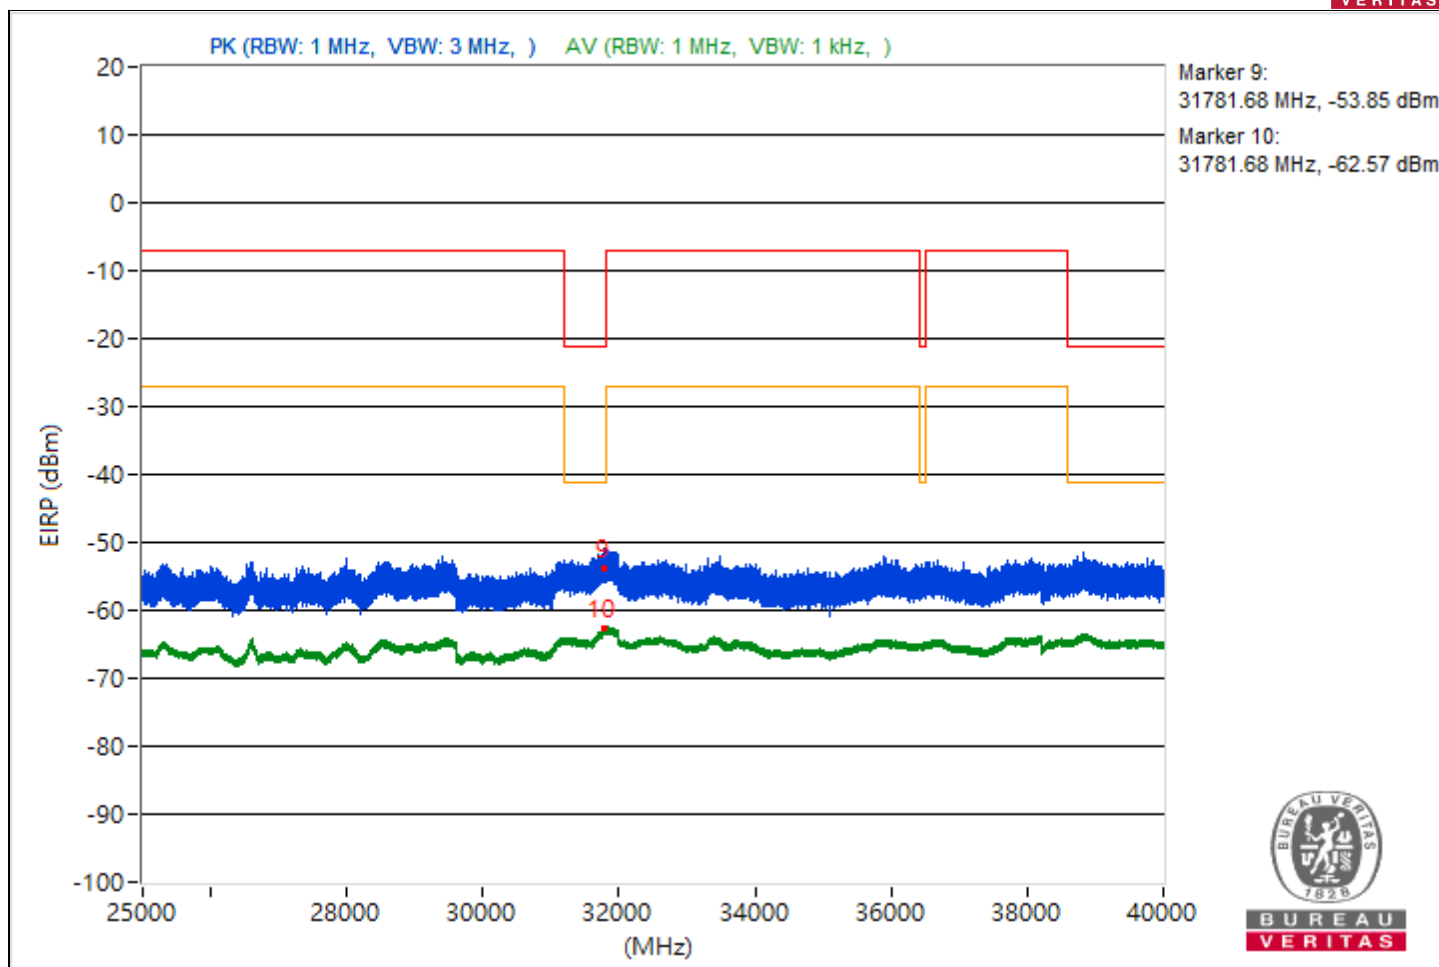


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5457.37	50.04 PK	74	-23.96	-55.97	-56.88	8.17	-45.22
2	5457.37	36.97 AV	54	-17.03	-69.08	-69.91	8.17	-58.29
3	7495.69	50.41 PK	74	-23.59	-55.73	-56.34	8.17	-44.85
4	7495.69	39.46 AV	54	-14.54	-66.8	-67.17	8.17	-55.8
5	19120.7	53.2 PK	74	-20.8	-54.43	-52.31	8.17	-42.06
6	19120.7	40.13 AV	54	-13.87	-66.59	-66.04	8.17	-55.13
7	22075.5	52.91 PK	74	-21.09	-53.32	-53.74	8.17	-42.35
8	22075.5	41.43 AV	54	-12.57	-65.43	-64.63	8.17	-53.83
9	31798.32	41.95 PK	74	-32.05	-65.72	-63.54	8.17	-53.31
10	31798.32	32.61 AV	54	-21.39	-73.59	-74.09	8.17	-62.65

Note: Margin value = Emission Level - Limit value

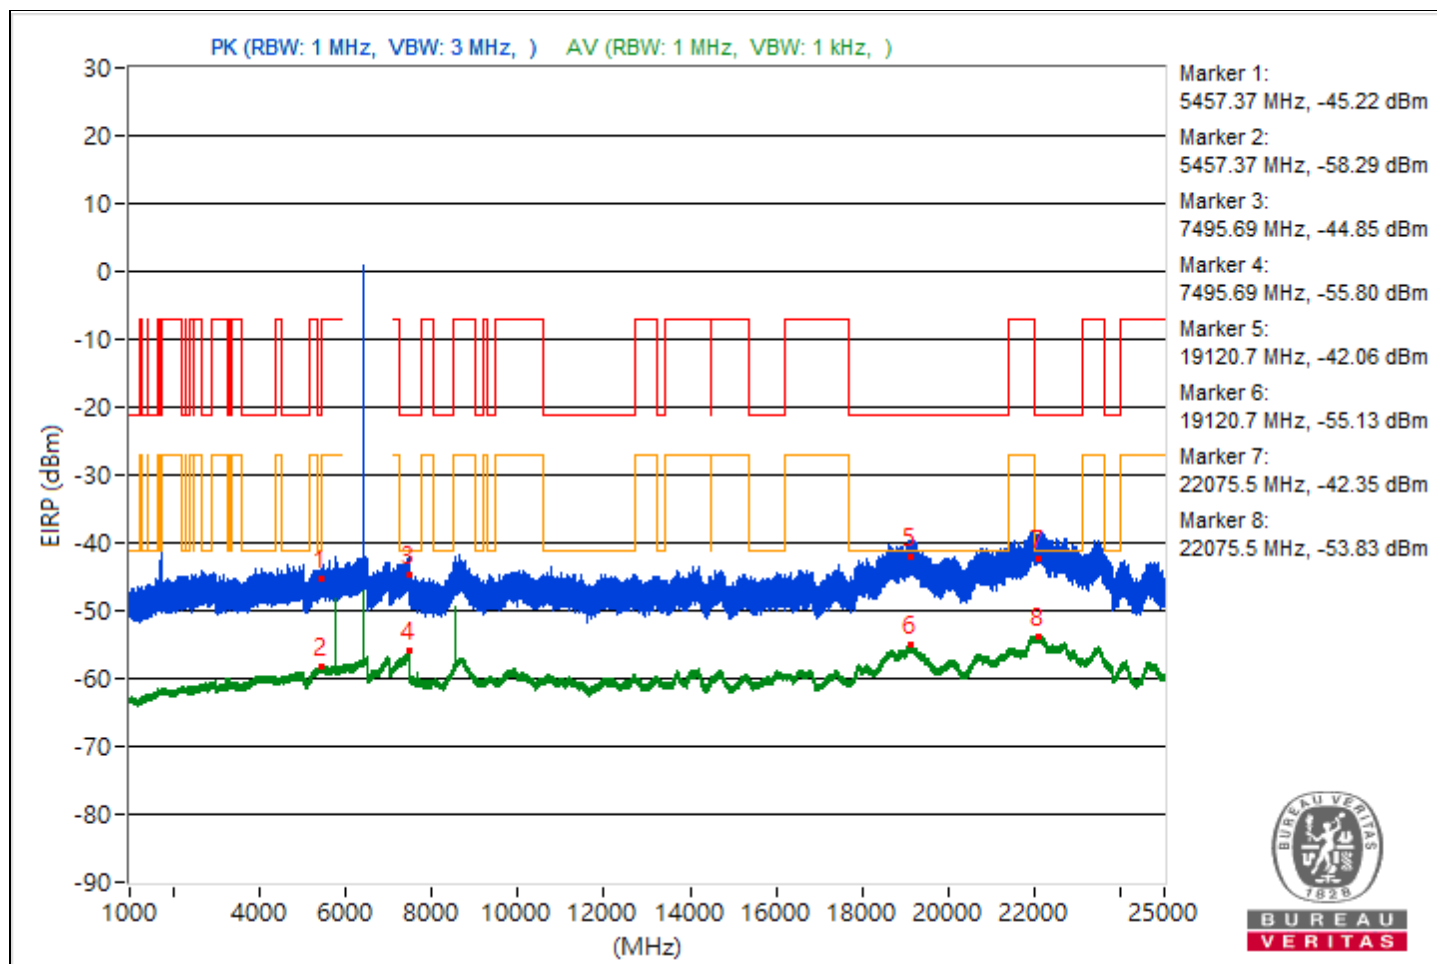


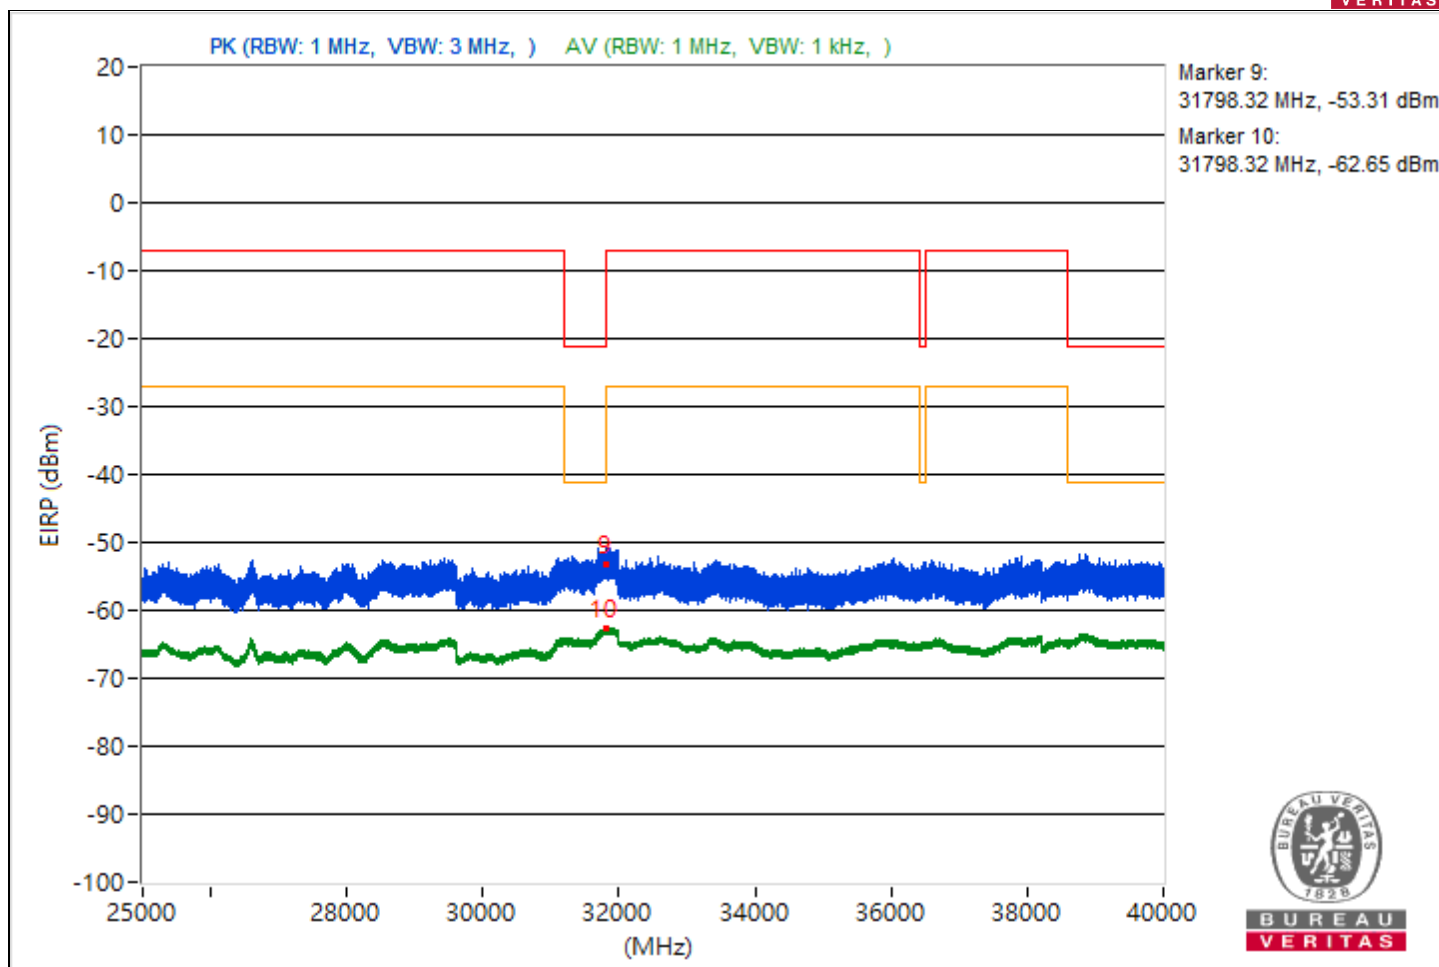


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5456.74	50.48 PK	74	-23.52	-56.73	-55.31	8.17	-44.78
2	5456.74	37.16 AV	54	-16.84	-69.53	-69.05	8.17	-58.1
3	7487.83	50.81 PK	74	-23.19	-56.43	-54.95	8.17	-44.45
4	7487.83	39.35 AV	54	-14.65	-66.81	-67.39	8.17	-55.91
5	19097.8	51.89 PK	74	-22.11	-54.77	-54.33	8.17	-43.37
6	19097.8	40.06 AV	54	-13.94	-65.95	-66.85	8.17	-55.2
7	22019.6	53.49 PK	74	-20.51	-53.55	-52.44	8.17	-41.77
8	22019.6	41.71 AV	54	-12.29	-64.94	-64.53	8.17	-53.55
9	31798.32	41.77 PK	74	-32.23	-66.5	-63.39	8.17	-53.49
10	31798.32	32.38 AV	54	-21.62	-73.73	-74.43	8.17	-62.88

Note: Margin value = Emission Level - Limit value

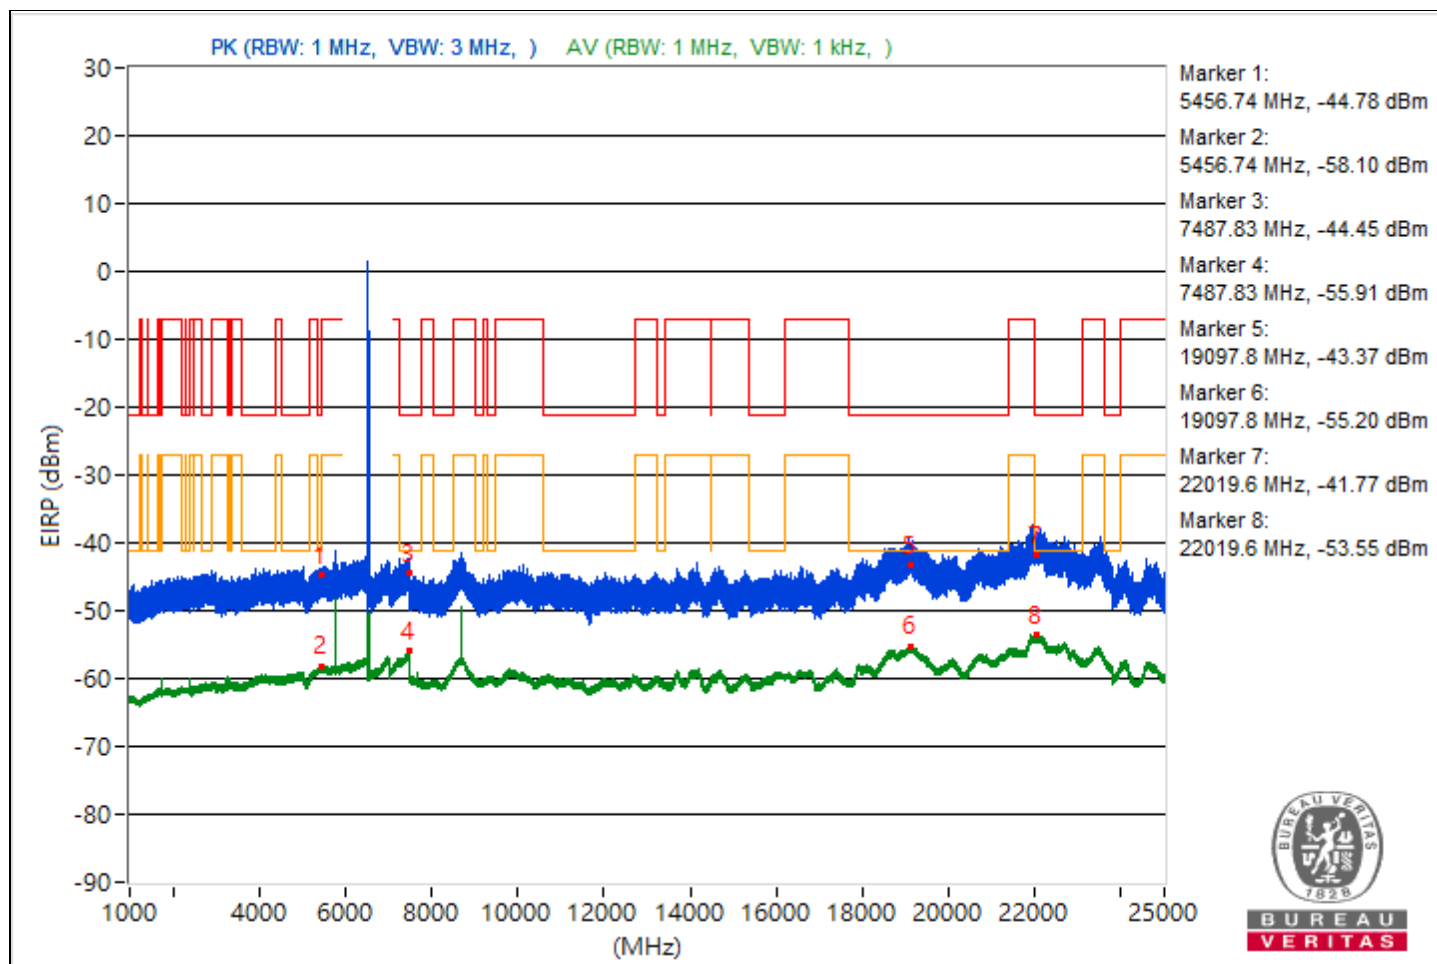


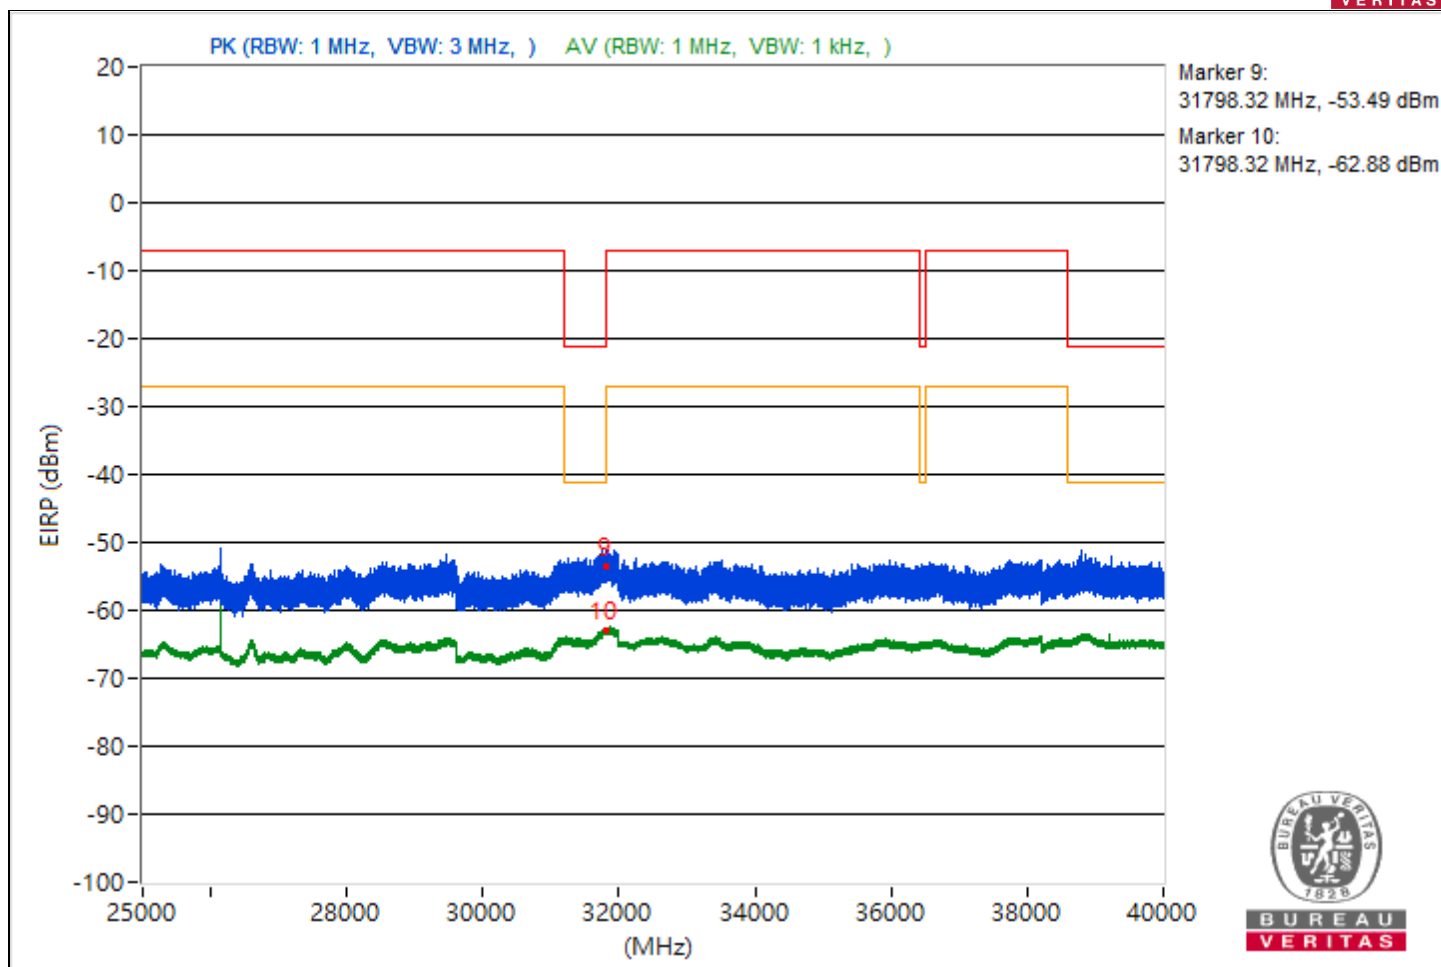


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5442.74	49.43 PK	74	-24.57	-56.72	-57.32	8.17	-45.83
2	5442.74	37.05 AV	54	-16.95	-69.81	-69.01	8.17	-58.21
3	7474.69	51.75 PK	74	-22.25	-55.96	-53.7	8.17	-43.51
4	7474.69	39.29 AV	54	-14.71	-66.78	-67.55	8.17	-55.97
5	19123.6	54.46 PK	74	-19.54	-52.42	-51.57	8.17	-40.8
6	19123.6	40.11 AV	54	-13.89	-66.76	-65.94	8.17	-55.15
7	22074.3	55.05 PK	74	-18.95	-51.91	-50.93	8.17	-40.21
8	22074.3	41.48 AV	54	-12.52	-64.78	-65.15	8.17	-53.78
9	31791.63	40.88 PK	74	-33.12	-65.17	-65.98	8.17	-54.38
10	31791.63	32.59 AV	54	-21.41	-73.63	-74.09	8.17	-62.67

Note: Margin value = Emission Level - Limit value

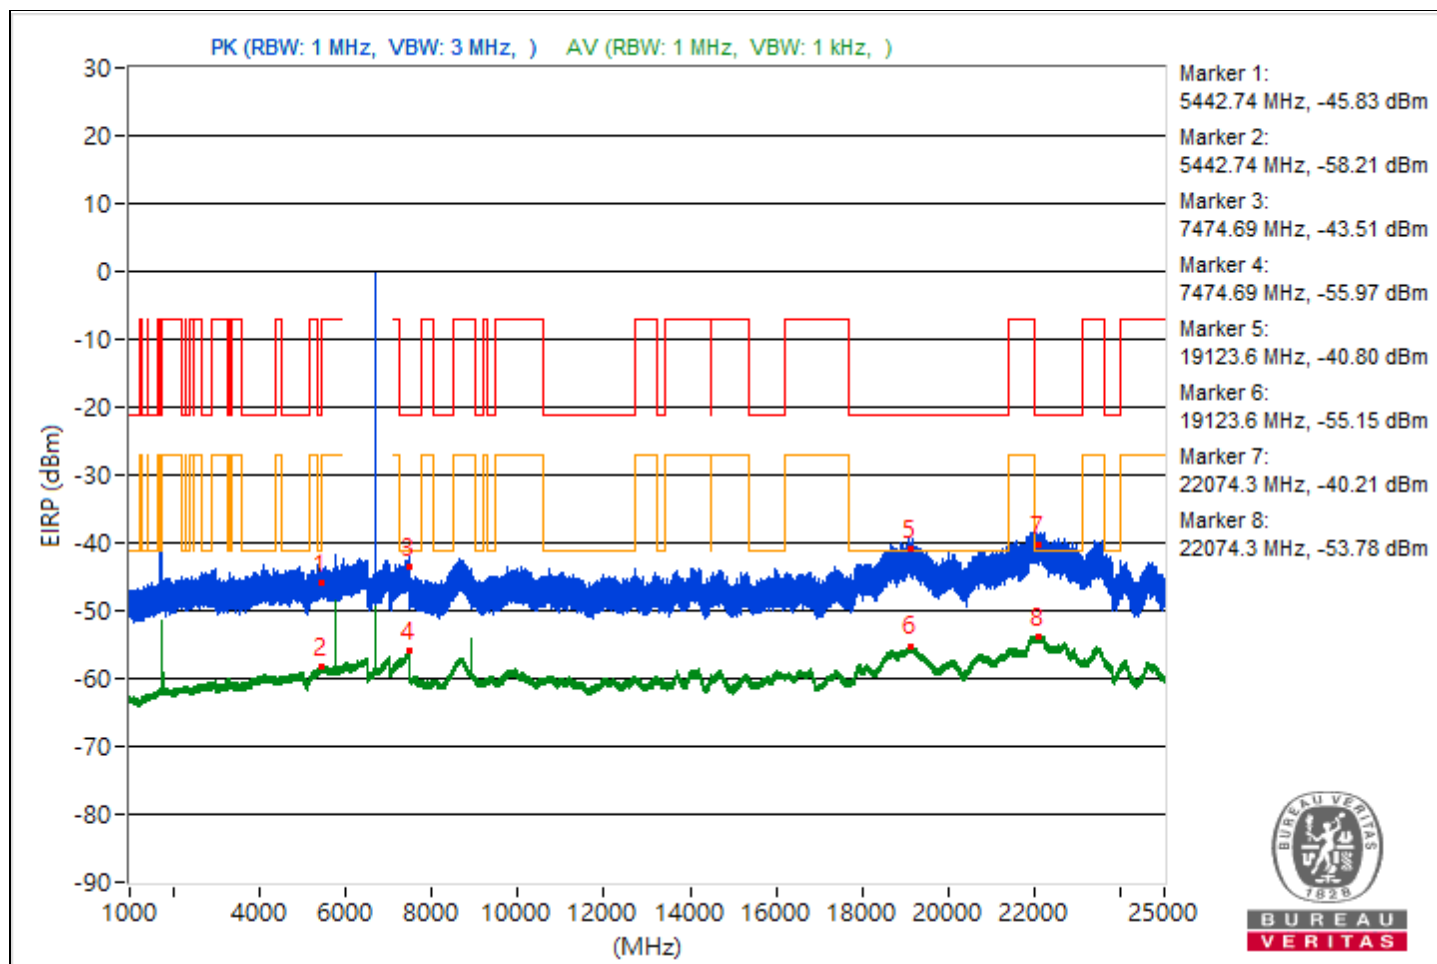


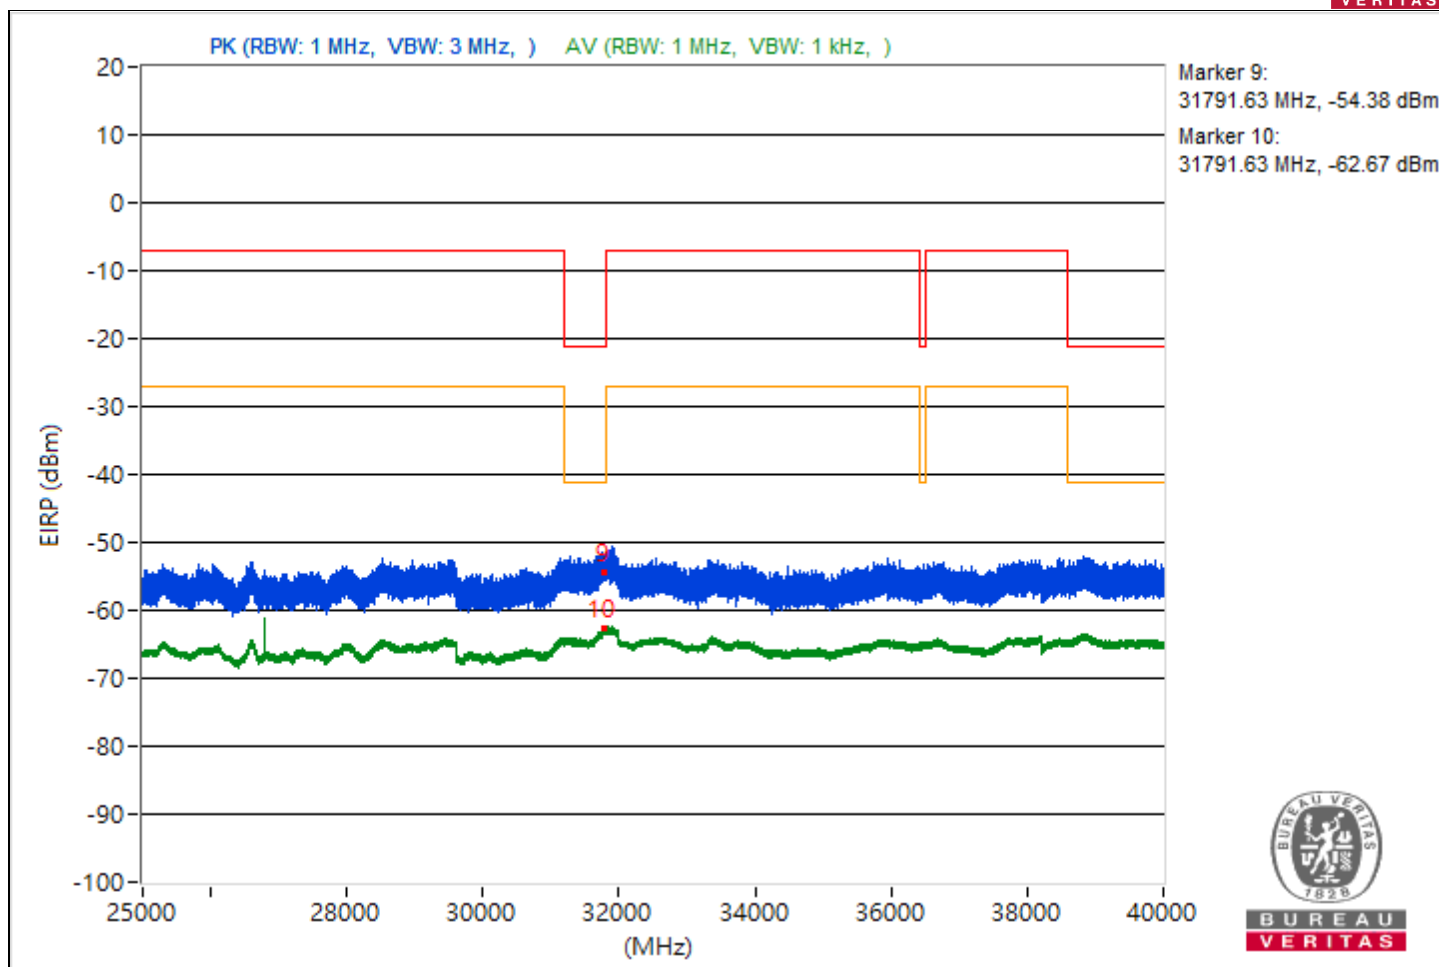


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5421.28	49.61 PK	74	-24.39	-55.9	-58.02	8.17	-45.65
2	5421.28	37.17 AV	54	-16.83	-69.61	-68.95	8.17	-58.09
3	8225.96	51.85 PK	74	-22.15	-52.94	-57.29	8.17	-43.41
4	8225.96	47.58 AV	54	-6.42	-56.84	-62.76	8.17	-47.68
5	19103.6	53.04 PK	74	-20.96	-53.99	-52.88	8.17	-42.22
6	19103.6	40.17 AV	54	-13.83	-66.74	-65.86	8.17	-55.09
7	22116.7	55.29 PK	74	-18.71	-50.04	-52.64	8.17	-39.97
8	22116.7	41.5 AV	54	-12.5	-65.4	-64.53	8.17	-53.76
9	31782.07	41.43 PK	74	-32.57	-65.2	-64.83	8.17	-53.83
10	31782.07	32.51 AV	54	-21.49	-73.61	-74.28	8.17	-62.75

Note: Margin value = Emission Level - Limit value

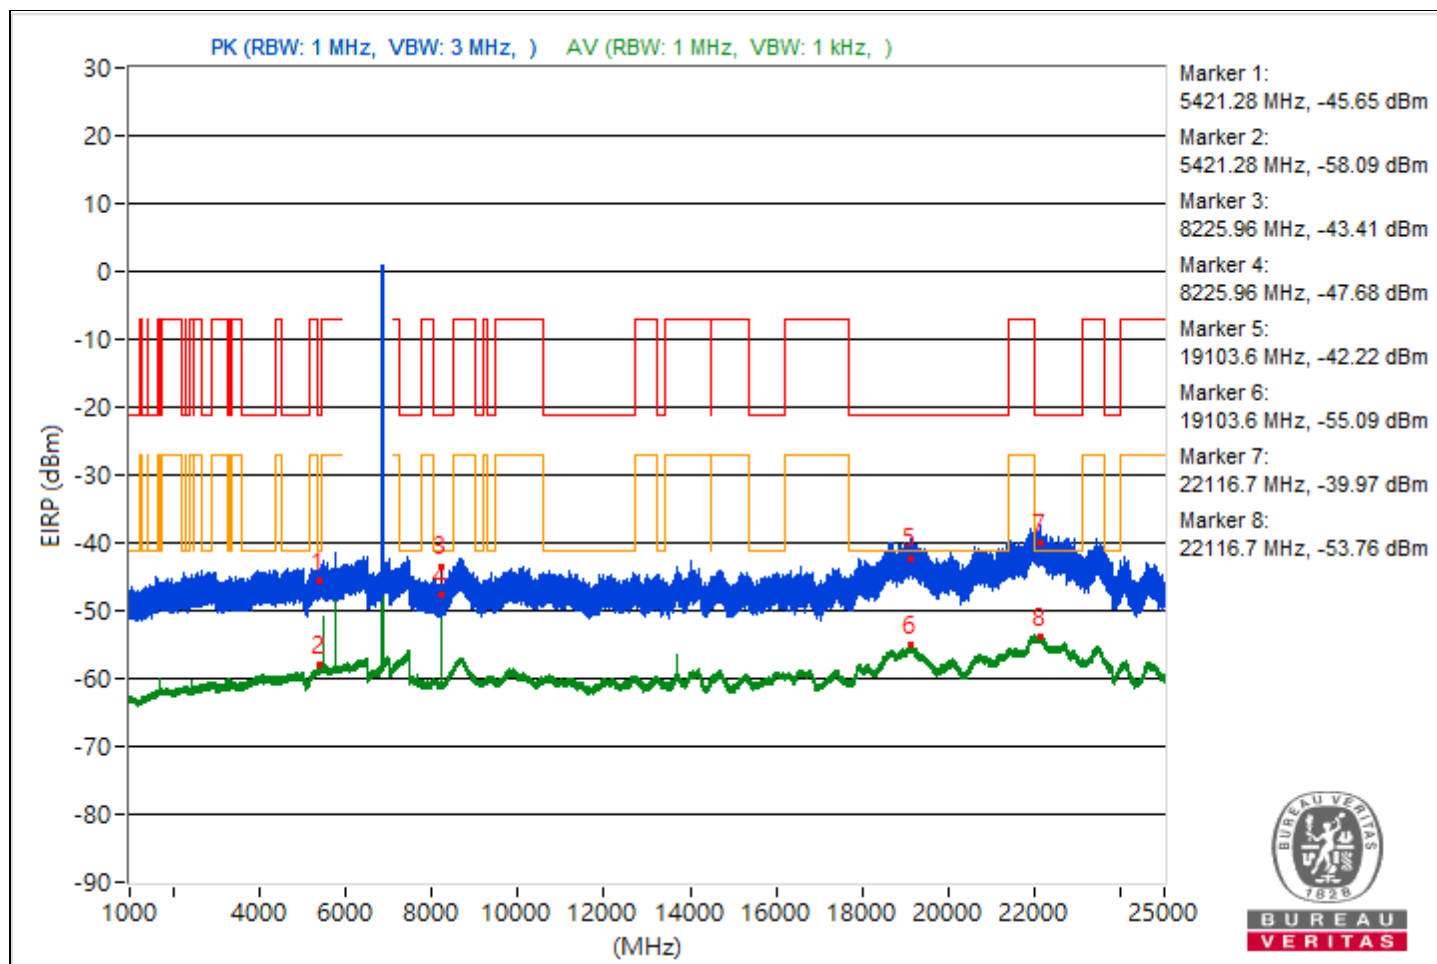


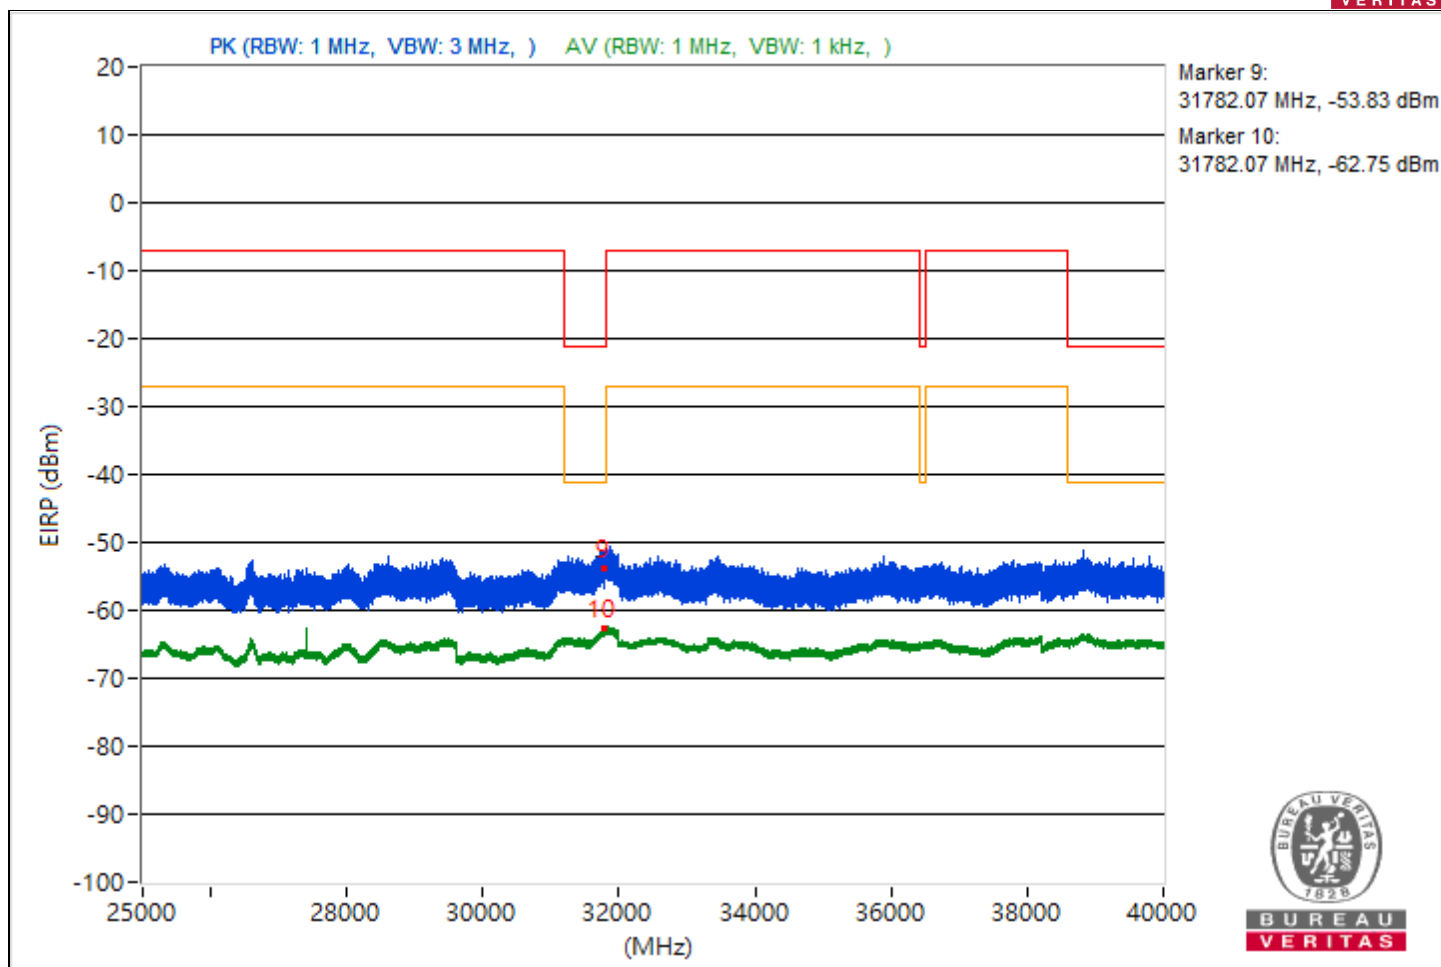


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5457.68	48.25 PK	74	-25.75	-59.39	-57.26	8.17	-47.01
2	5457.68	37.01 AV	54	-16.99	-69.74	-69.14	8.17	-58.25
3	7487.29	50.78 PK	74	-23.22	-56.85	-54.73	8.17	-44.48
4	7487.29	39.25 AV	54	-14.75	-67.72	-66.71	8.17	-56.01
5	19104.7	52.81 PK	74	-21.19	-53.17	-54.14	8.17	-42.45
6	19104.7	40.32 AV	54	-13.68	-66.26	-65.97	8.17	-54.94
7	22103.4	54.98 PK	74	-19.02	-51.68	-51.24	8.17	-40.28
8	22103.4	41.49 AV	54	-12.51	-65.25	-64.67	8.17	-53.77
9	31794.43	41.06 PK	74	-32.94	-66.7	-64.36	8.17	-54.2
10	31794.43	32.31 AV	54	-21.69	-74.73	-73.6	8.17	-62.95

Note: Margin value = Emission Level - Limit value

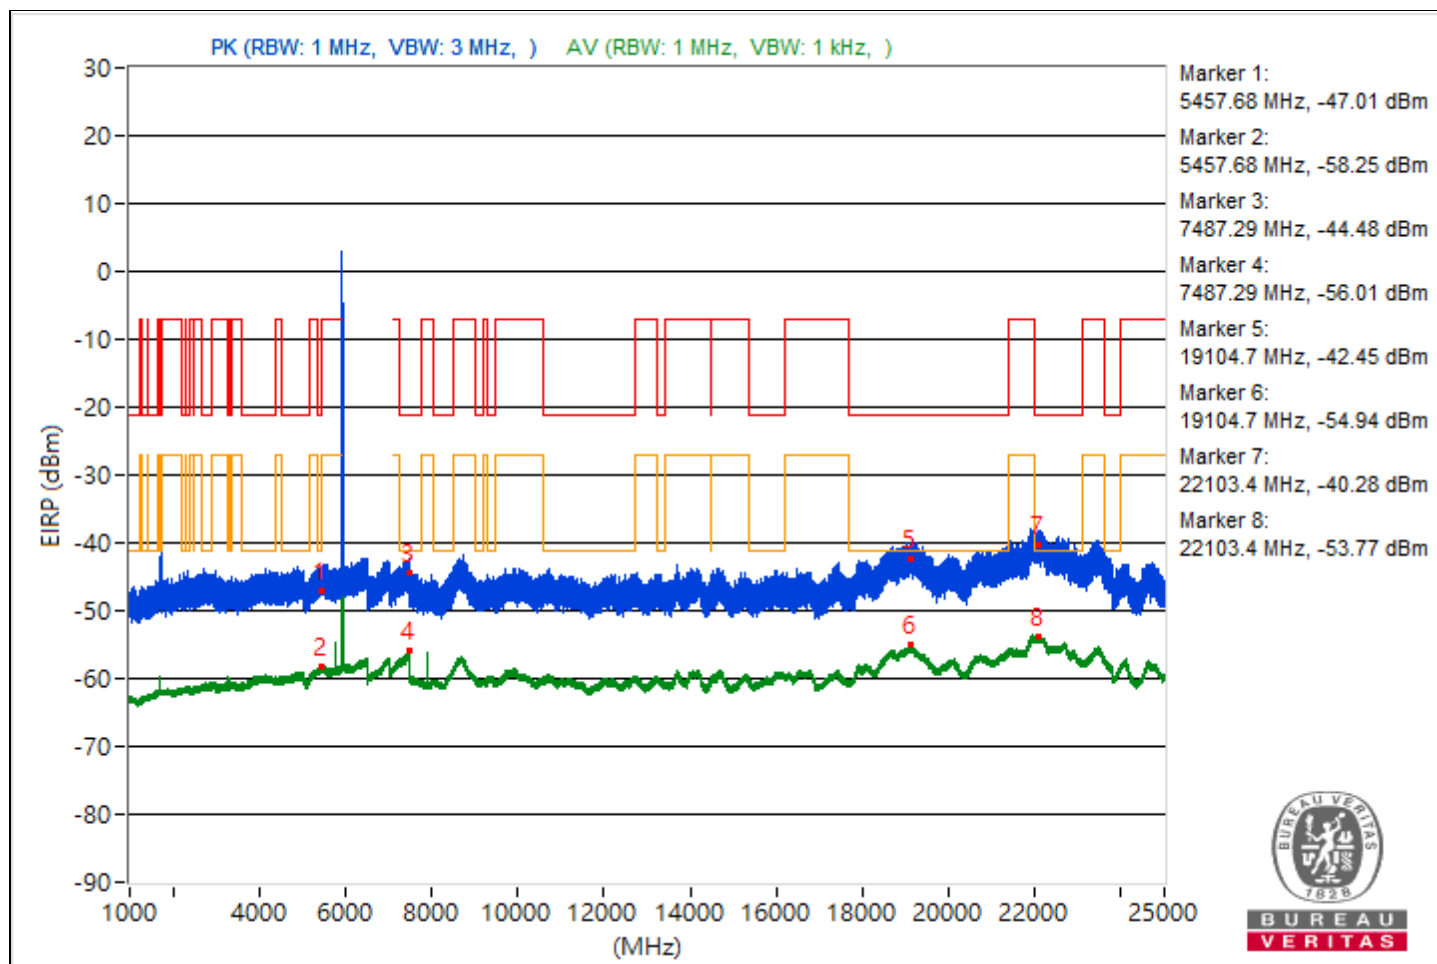


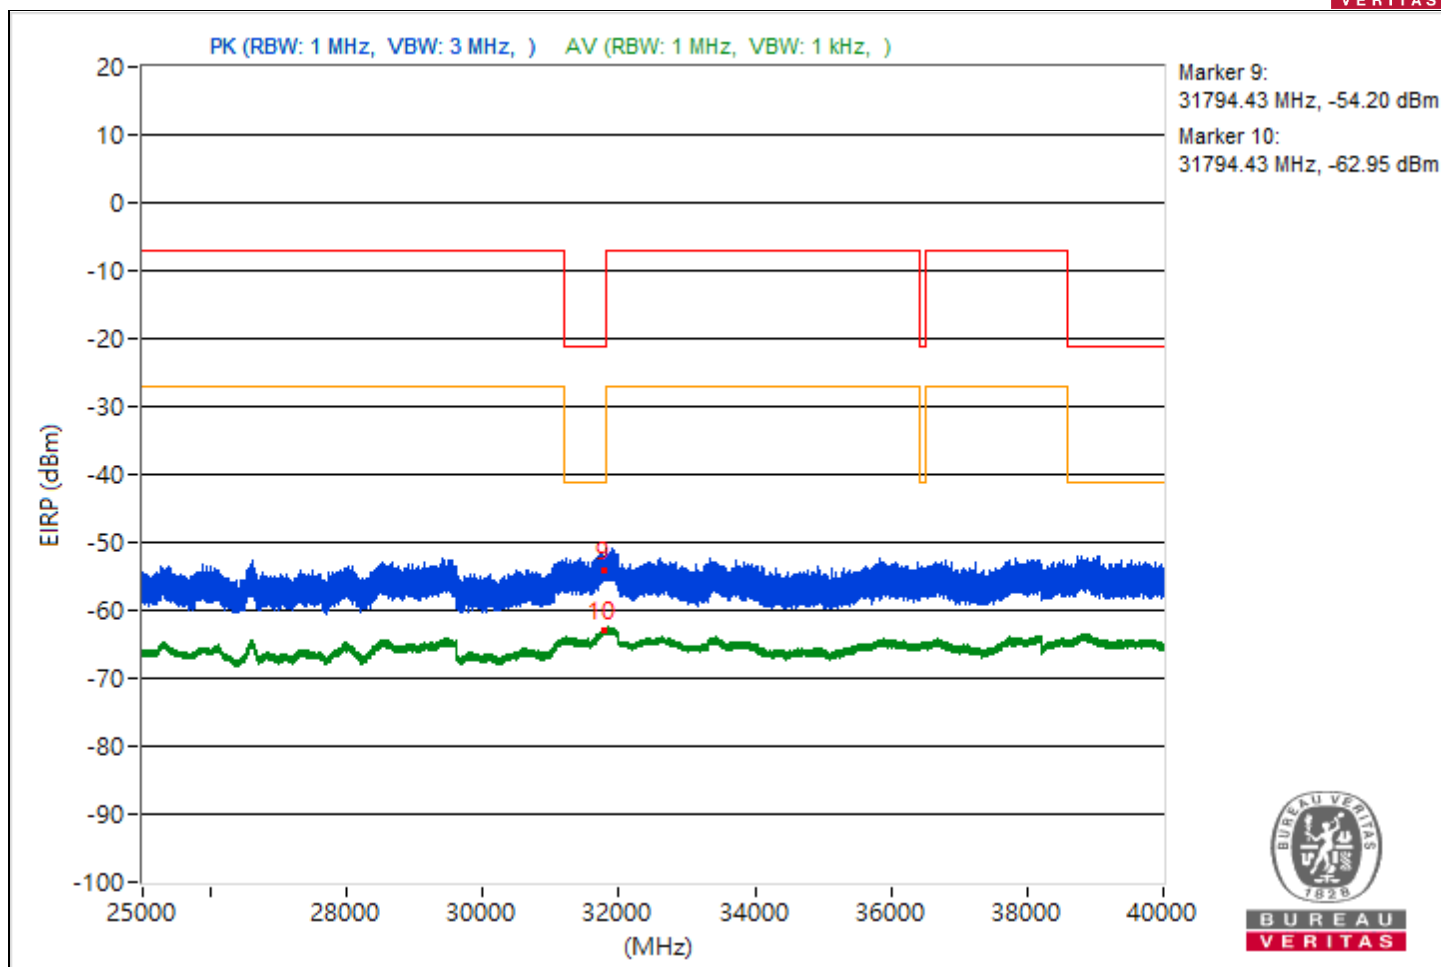


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5444.07	50.67 PK	74	-23.33	-55.25	-56.36	8.17	-44.59
2	5444.07	36.99 AV	54	-17.01	-68.98	-69.98	8.17	-58.27
3	7488.84	49.73 PK	74	-24.27	-57.29	-56.21	8.17	-45.53
4	7488.84	39.29 AV	54	-14.71	-67.39	-66.92	8.17	-55.97
5	19143.4	53.13 PK	74	-20.87	-52.89	-53.78	8.17	-42.13
6	19143.4	40.21 AV	54	-13.79	-65.85	-66.64	8.17	-55.05
7	22074.5	53.94 PK	74	-20.06	-52.26	-52.75	8.17	-41.32
8	22074.5	41.31 AV	54	-12.69	-65.51	-64.77	8.17	-53.95
9	31773.82	40.64 PK	74	-33.36	-66.06	-65.56	8.17	-54.62
10	31773.82	32.62 AV	54	-21.38	-73.52	-74.14	8.17	-62.64

Note: Margin value = Emission Level - Limit value

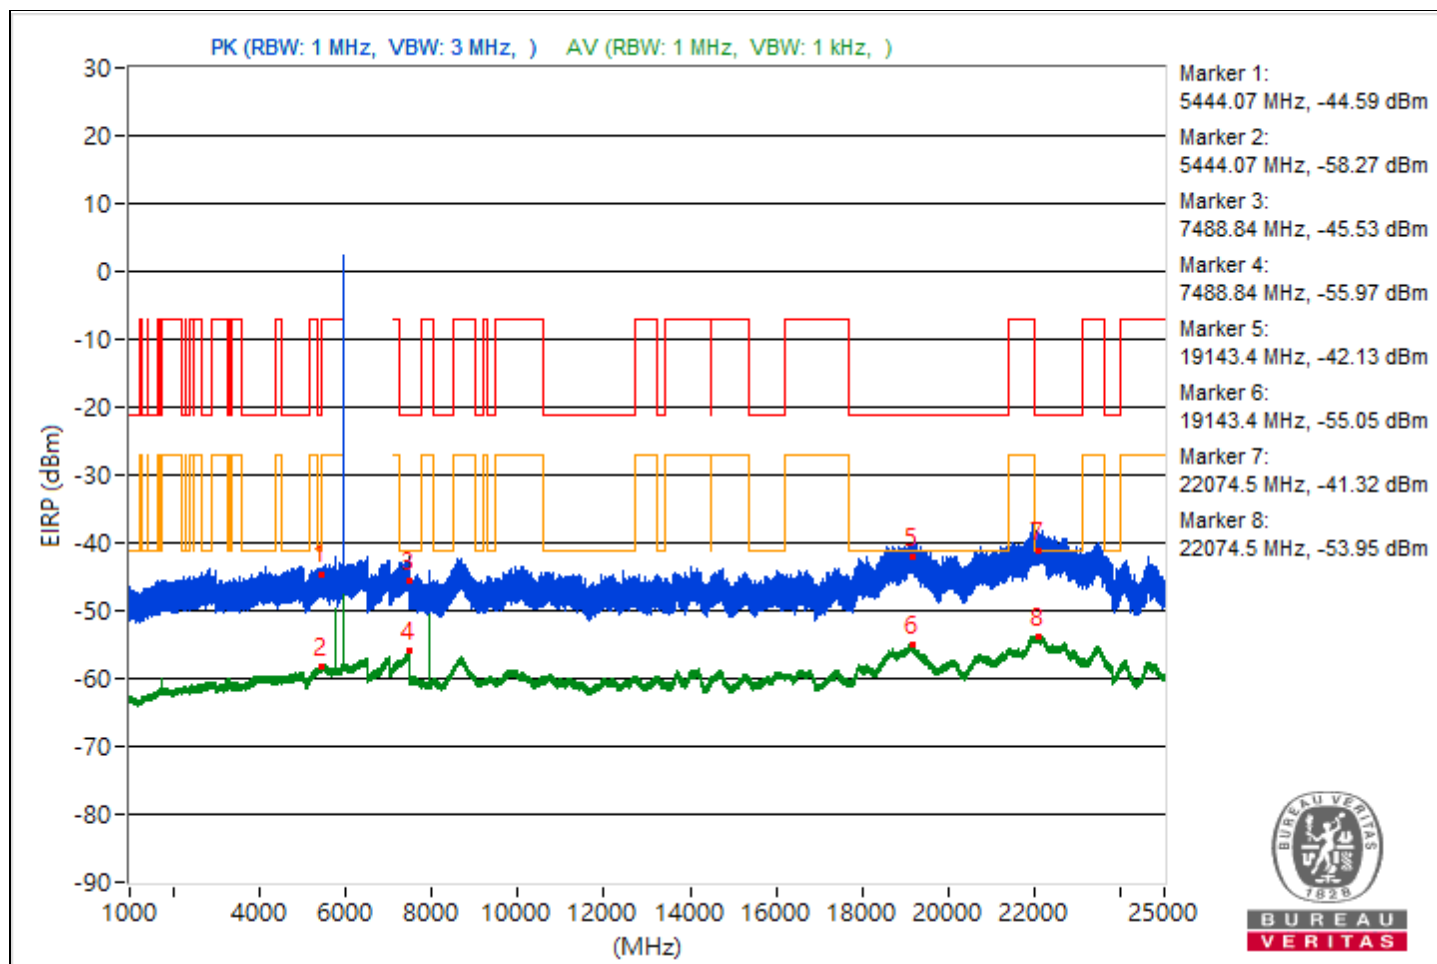


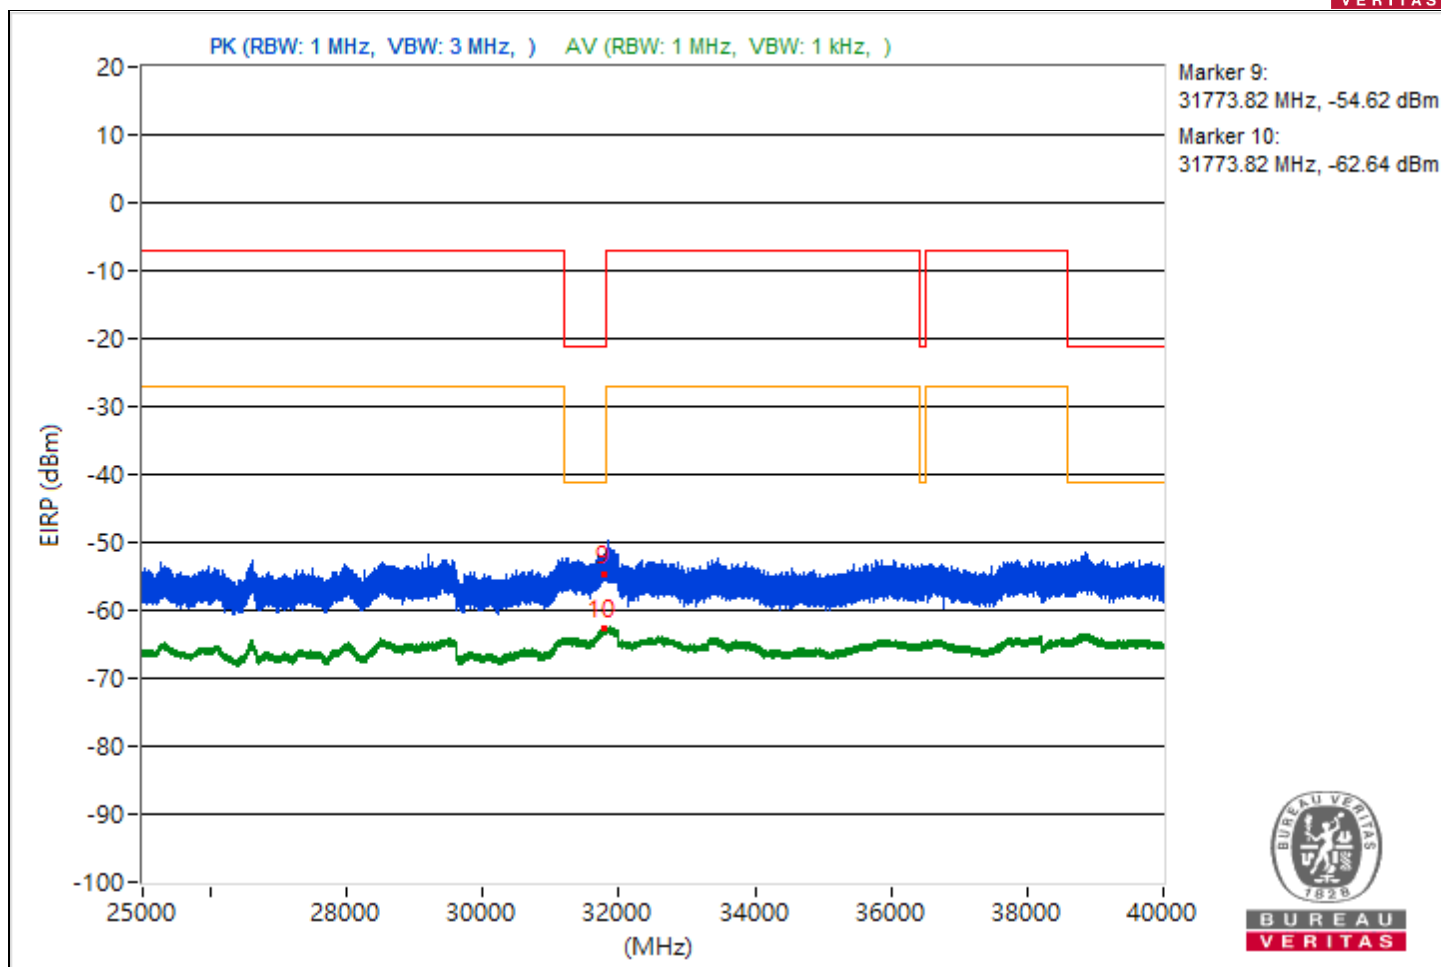


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5439.4	48.89 PK	74	-25.11	-58.49	-56.78	8.17	-46.37
2	5439.4	37.11 AV	54	-16.89	-69.64	-69.04	8.17	-58.15
3	8233.33	51.5 PK	74	-22.5	-53.57	-56.95	8.17	-43.76
4	8233.33	46.36 AV	54	-7.64	-58.56	-62.46	8.17	-48.9
5	19105.5	53.74 PK	74	-20.26	-54.17	-51.61	8.17	-41.52
6	19105.5	40.3 AV	54	-13.7	-65.99	-66.3	8.17	-54.96
7	22187.9	53.05 PK	74	-20.95	-53.45	-53.33	8.17	-42.21
8	22187.9	41.34 AV	54	-12.66	-65.66	-64.61	8.17	-53.92
9	31791.01	41.11 PK	74	-32.89	-64.75	-65.98	8.17	-54.15
10	31791.01	32.57 AV	54	-21.43	-73.57	-74.18	8.17	-62.69

Note: Margin value = Emission Level - Limit value

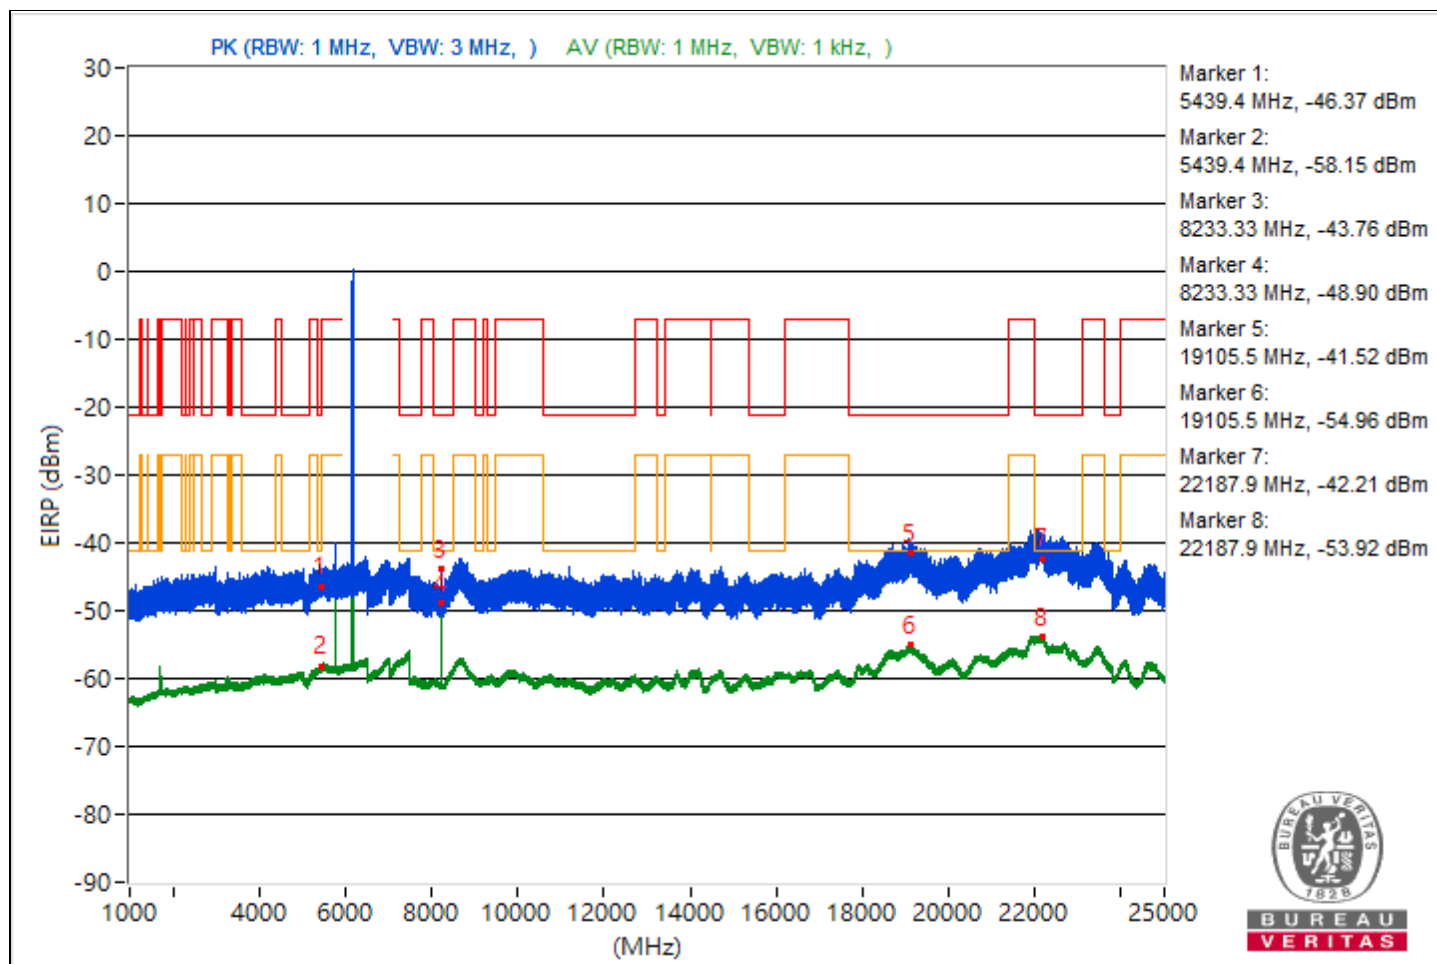


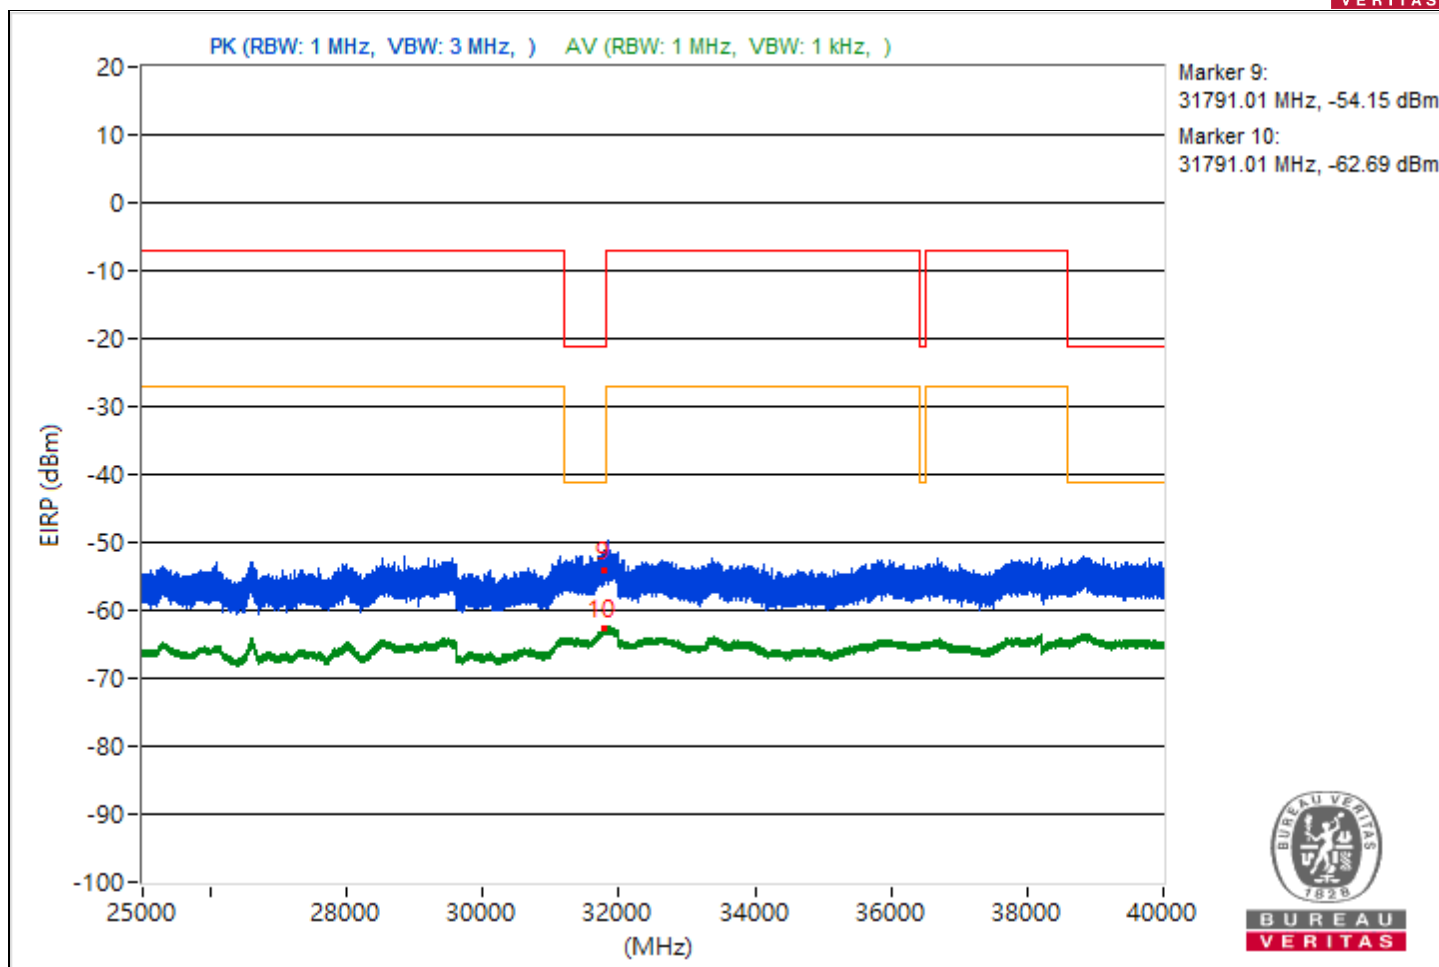


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5449.74	51.28 PK	74	-22.72	-54.21	-56.38	8.17	-43.98
2	5449.74	37.15 AV	54	-16.85	-69.49	-69.11	8.17	-58.11
3	7492.34	51.13 PK	74	-22.87	-55.09	-55.55	8.17	-44.13
4	7492.34	39.29 AV	54	-14.71	-67.38	-66.93	8.17	-55.97
5	19103.4	52.7 PK	74	-21.3	-53.48	-54.01	8.17	-42.56
6	19103.4	40 AV	54	-14	-66.87	-66.06	8.17	-55.26
7	22121.4	54.52 PK	74	-19.48	-53.7	-50.66	8.17	-40.74
8	22121.4	41.39 AV	54	-12.61	-64.79	-65.33	8.17	-53.87
9	31794.28	43.22 PK	74	-30.78	-61.42	-66.34	8.17	-52.04
10	31794.28	32.57 AV	54	-21.43	-74.06	-73.68	8.17	-62.69

Note: Margin value = Emission Level - Limit value

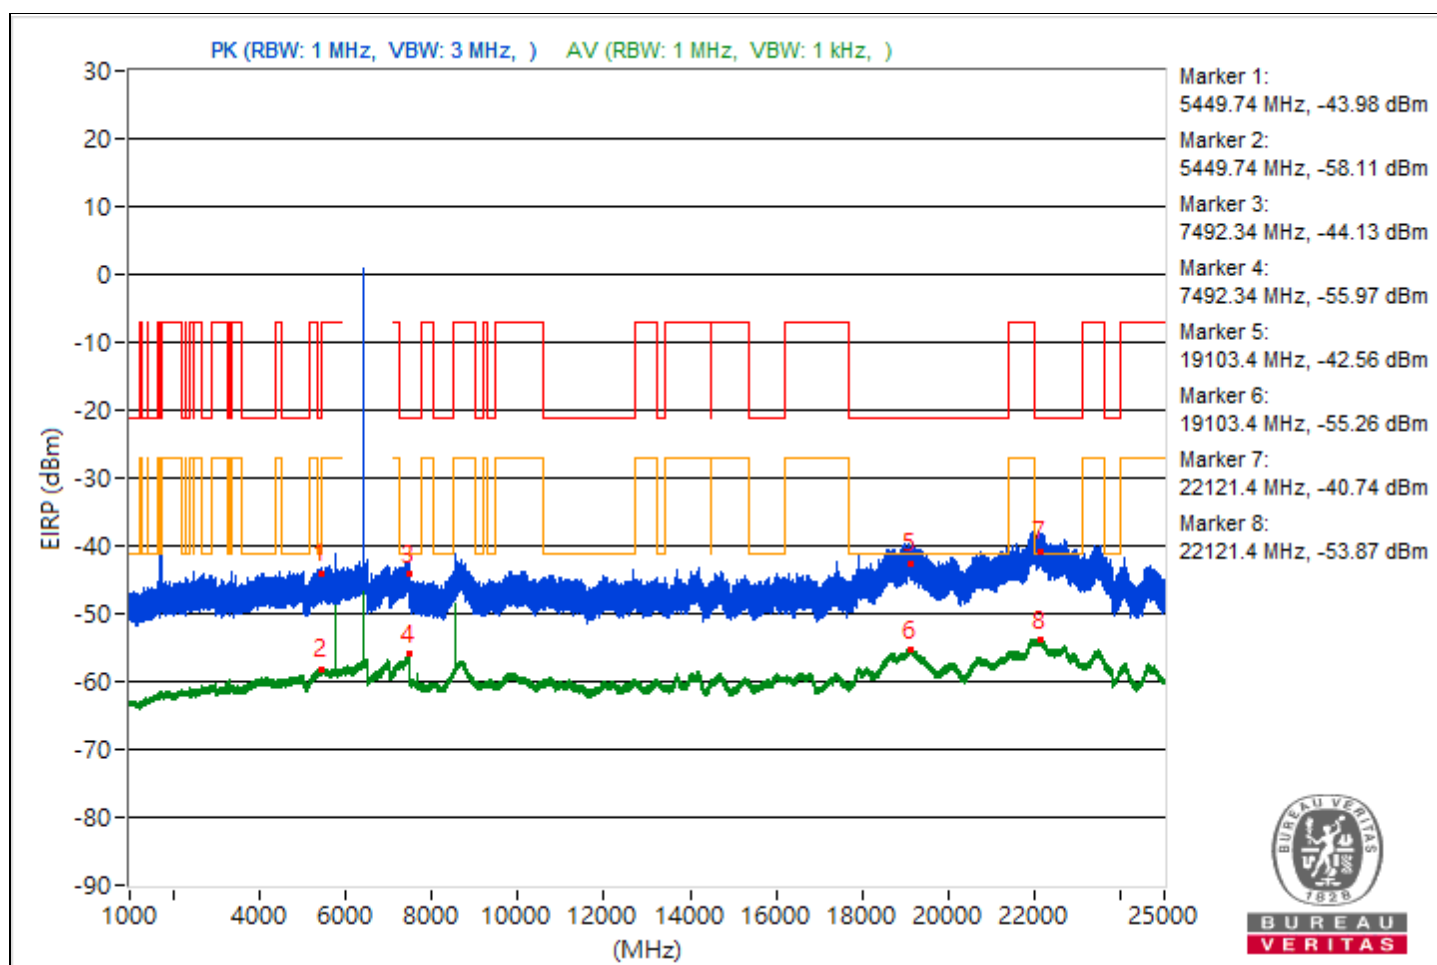


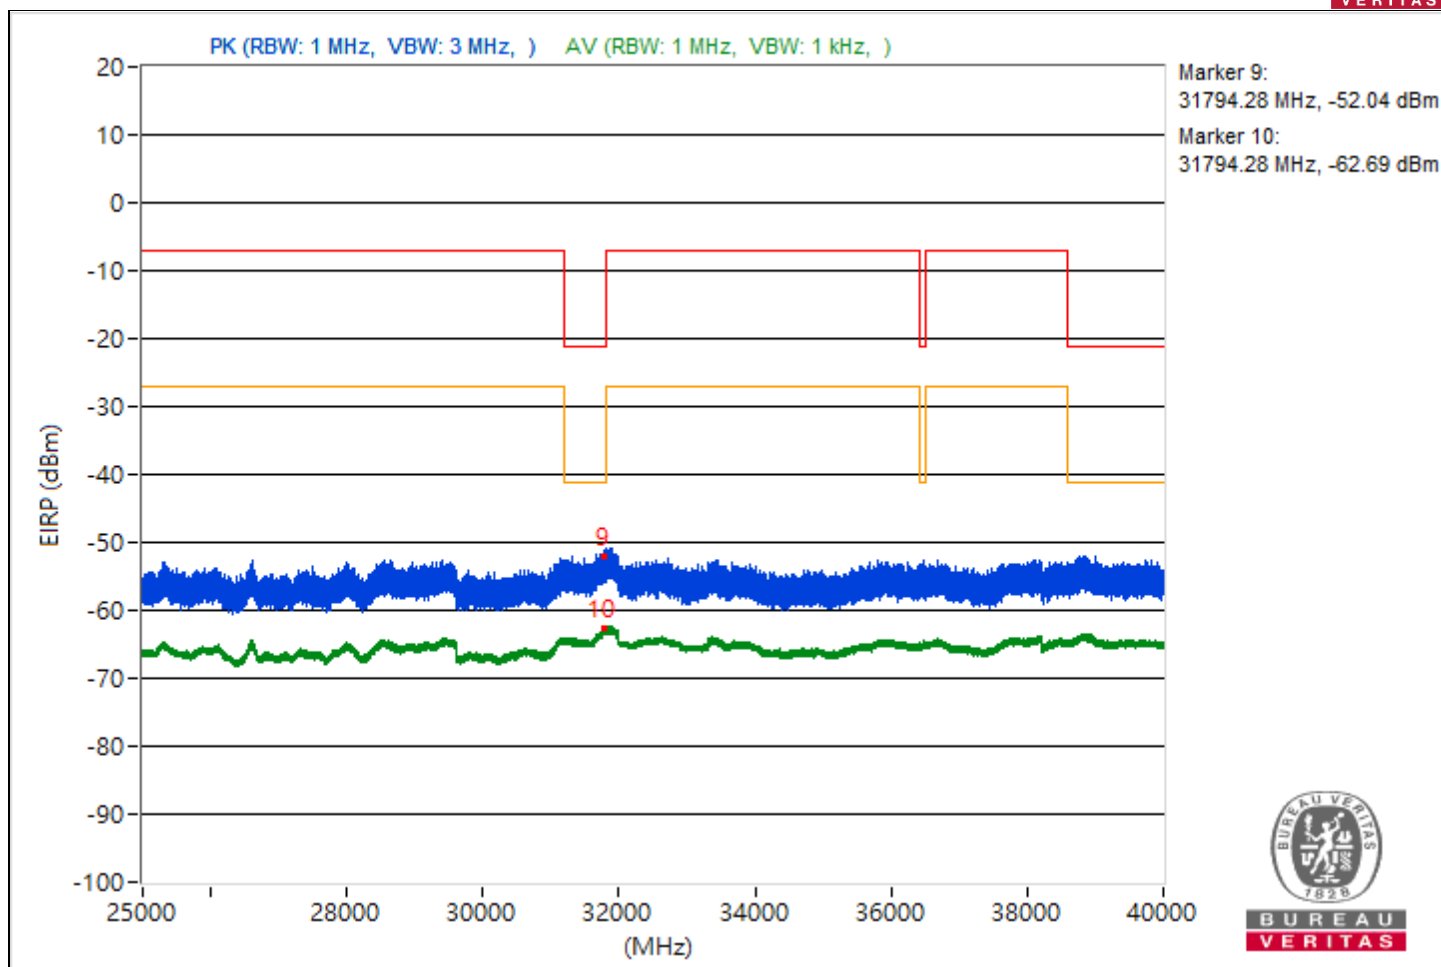


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5448.5	49.12 PK	74	-24.88	-56.91	-57.77	8.17	-46.14
2	5448.5	37.05 AV	54	-16.95	-68.86	-69.98	8.17	-58.21
3	7494.99	51.17 PK	74	-22.83	-55.61	-54.95	8.17	-44.09
4	7494.99	39.4 AV	54	-14.6	-67.39	-66.72	8.17	-55.86
5	19147	53.51 PK	74	-20.49	-53.5	-52.42	8.17	-41.75
6	19147	40.04 AV	54	-13.96	-66.91	-65.94	8.17	-55.22
7	22074	53.83 PK	74	-20.17	-52.56	-52.66	8.17	-41.43
8	22074	41.58 AV	54	-12.42	-64.68	-65.05	8.17	-53.68
9	31798.17	40.15 PK	74	-33.85	-66.21	-66.36	8.17	-55.11
10	31798.17	32.47 AV	54	-21.53	-73.68	-74.28	8.17	-62.79

Note: Margin value = Emission Level - Limit value

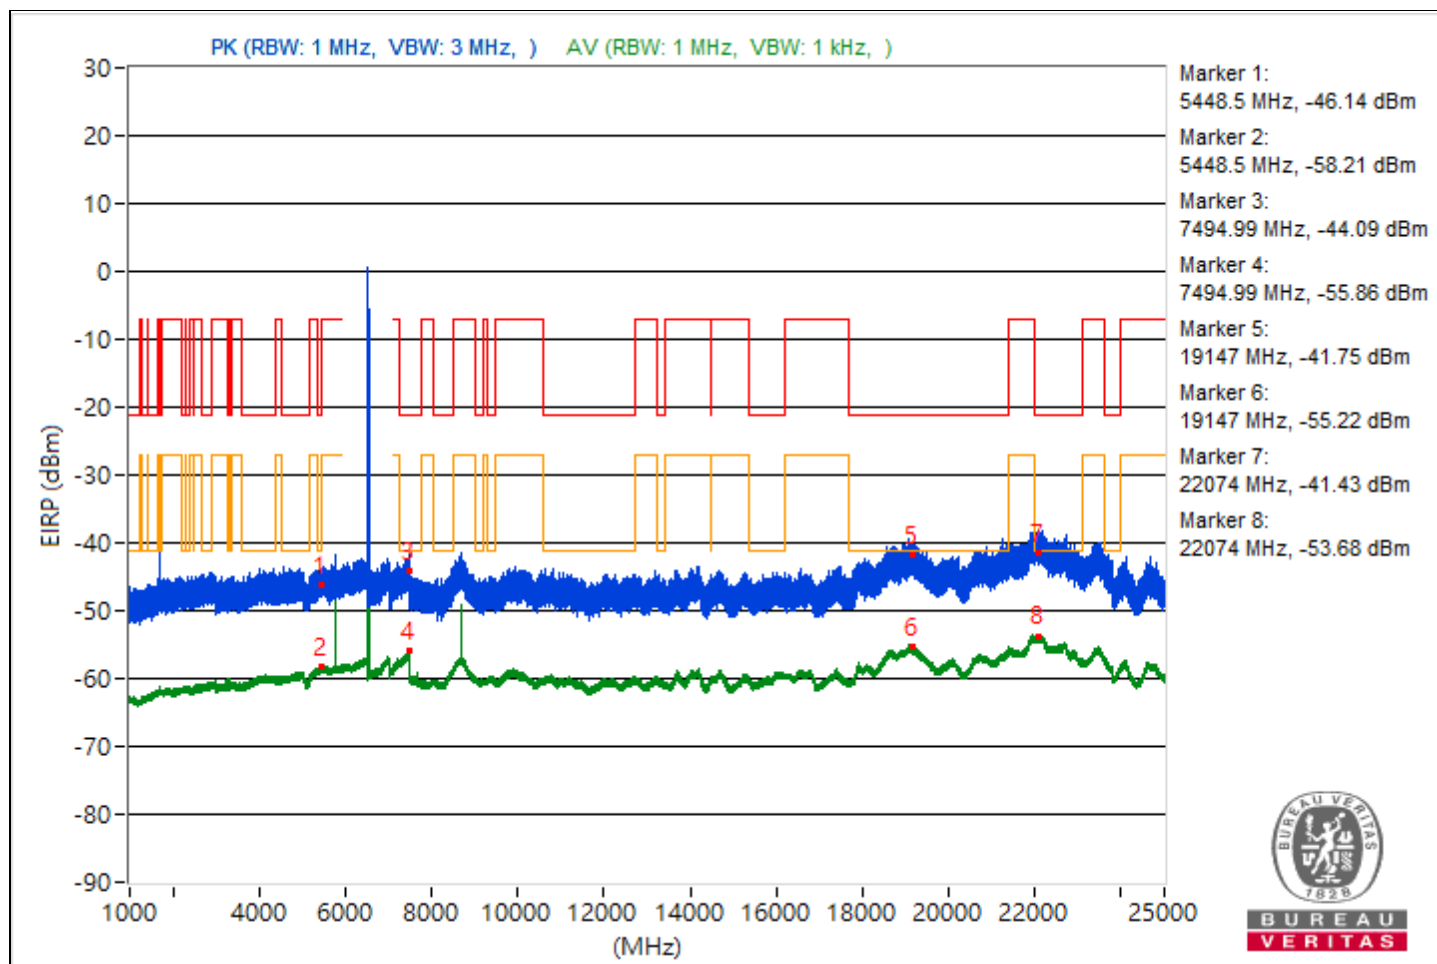

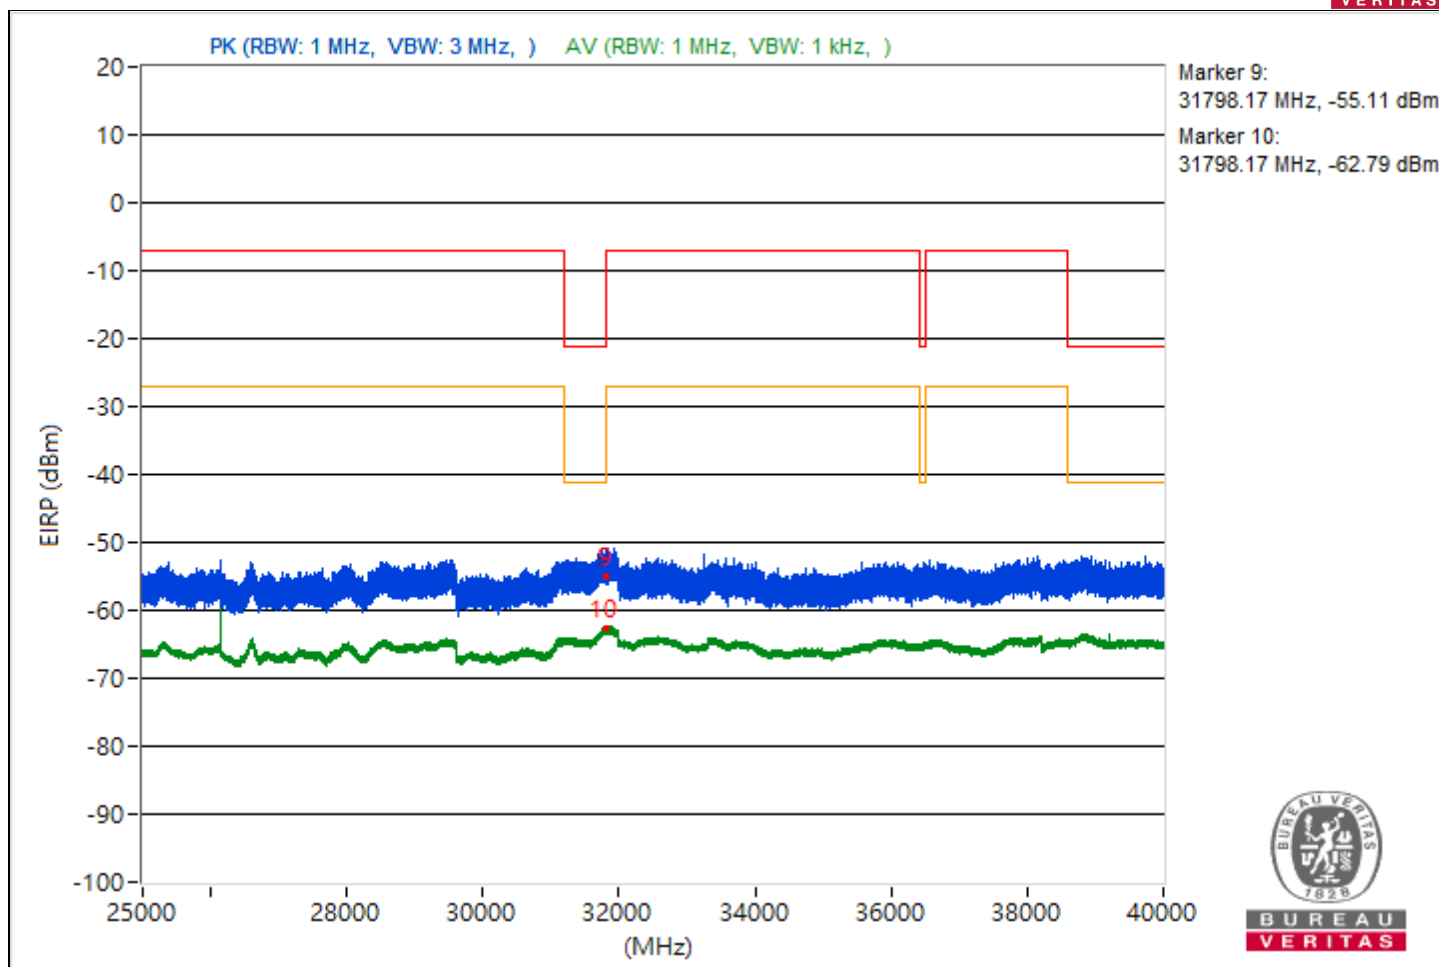



RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#1710.5	49.98 PK	88.26	-38.28	-55.26	-58.11	8.17	-45.28
2	#1710.5	51.53 AV	68.26	-16.73	-51.93	-73.52	8.17	-43.73
3	7491.57	51.67 PK	74	-22.33	-54.06	-55.63	8.17	-43.59
4	7491.57	39.44 AV	54	-14.56	-66.81	-67.2	8.17	-55.82
5	19121.3	53.63 PK	74	-20.37	-54.48	-51.61	8.17	-41.63
6	19121.3	40.04 AV	54	-13.96	-66.07	-66.76	8.17	-55.22
7	22090.4	56.95 PK	74	-17.05	-47.88	-52.09	8.17	-38.31
8	22090.4	41.39 AV	54	-12.61	-65.57	-64.58	8.17	-53.87
9	31791.79	40.3 PK	74	-33.7	-66.91	-65.48	8.17	-54.96
10	31791.79	32.52 AV	54	-21.48	-73.65	-74.22	8.17	-62.74

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

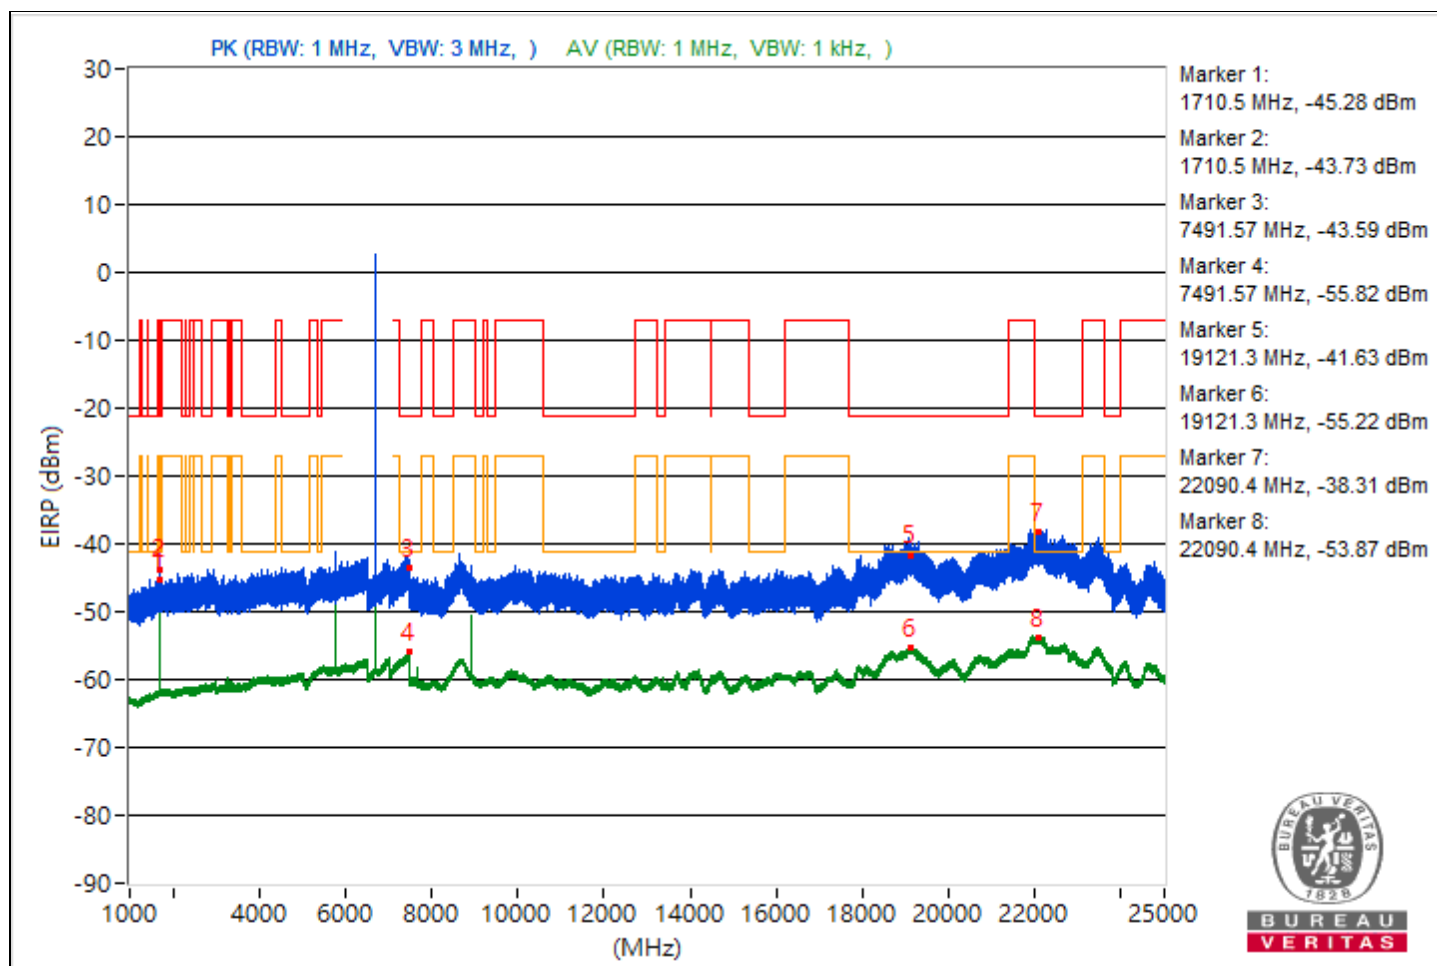


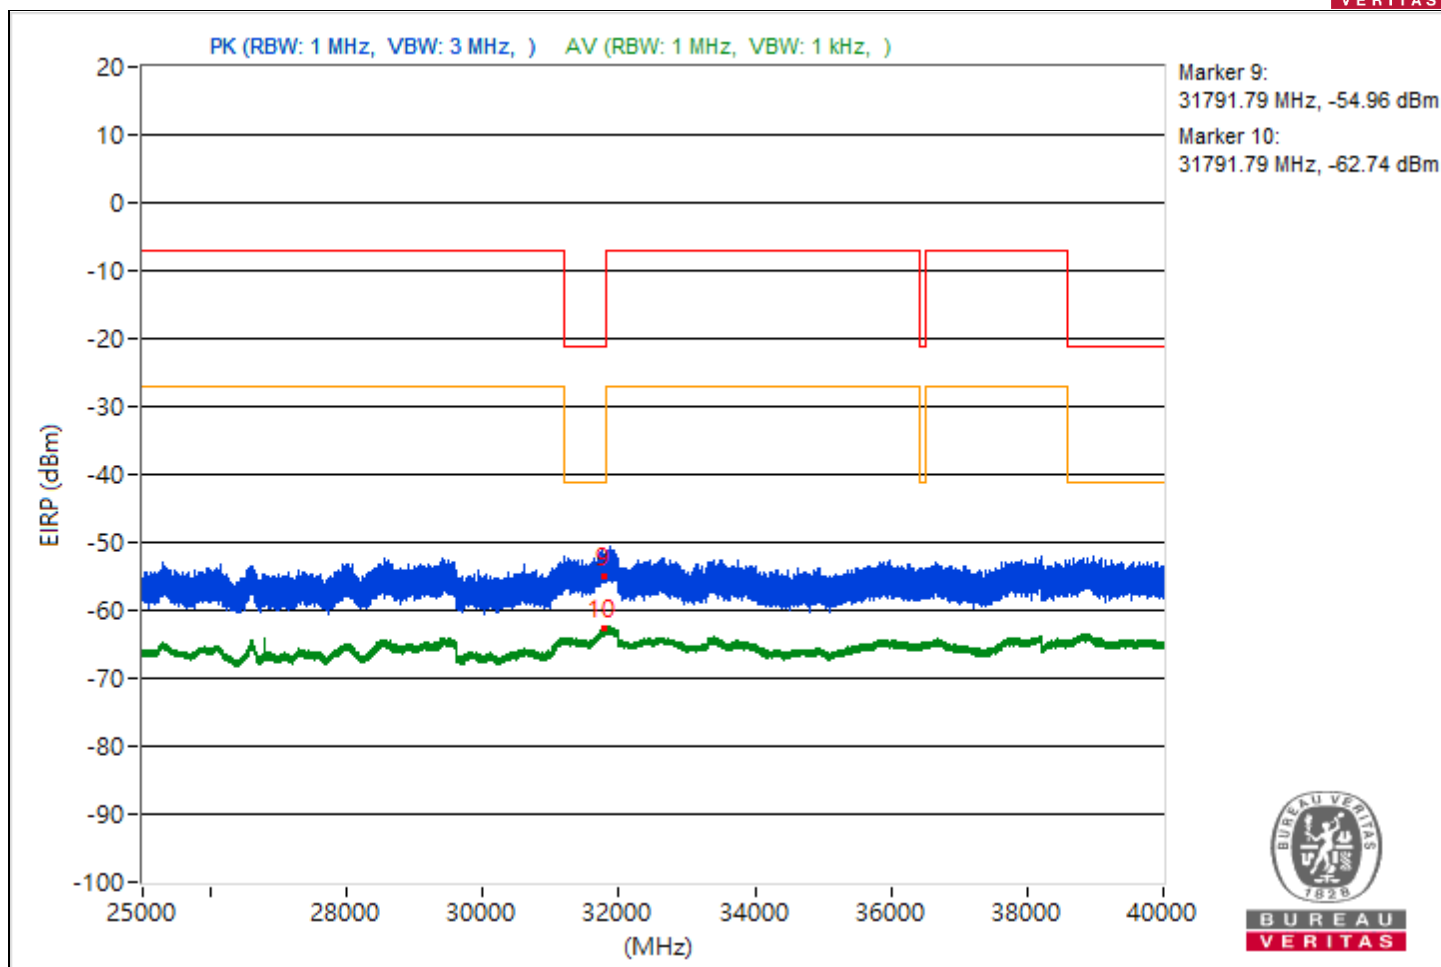


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 60% RH	Tested By	Tim Chen

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5431.54	49.6 PK	74	-24.4	-55.62	-58.54	8.17	-45.66
2	5431.54	37.14 AV	54	-16.86	-69.71	-68.92	8.17	-58.12
3	8225.87	53.99 PK	74	-20.01	-50.44	-56.32	8.17	-41.27
4	8225.87	51.1 AV	54	-2.9	-52.75	-62.72	8.17	-44.16
5	19103.3	53.14 PK	74	-20.86	-53.38	-53.22	8.17	-42.12
6	19103.3	40.28 AV	54	-13.72	-65.96	-66.37	8.17	-54.98
7	22048.7	54.82 PK	74	-19.18	-50.64	-52.89	8.17	-40.44
8	22048.7	41.48 AV	54	-12.52	-65.33	-64.62	8.17	-53.78
9	31766.51	42.02 PK	74	-31.98	-65.16	-63.78	8.17	-53.24
10	31766.51	32.31 AV	54	-21.69	-73.68	-74.63	8.17	-62.95

Note: Margin value = Emission Level - Limit value

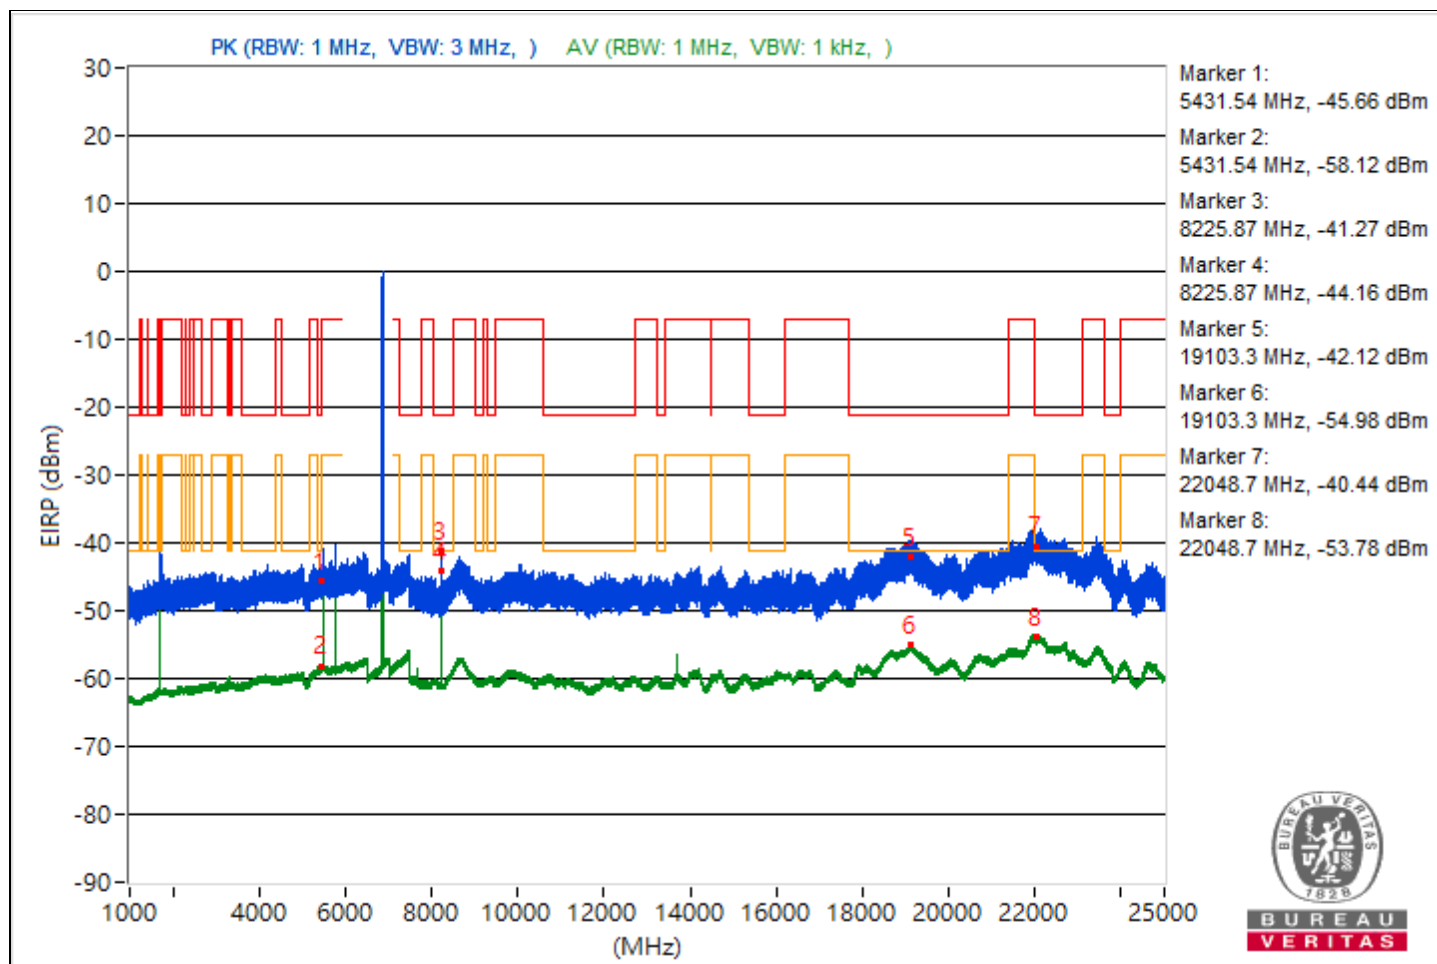

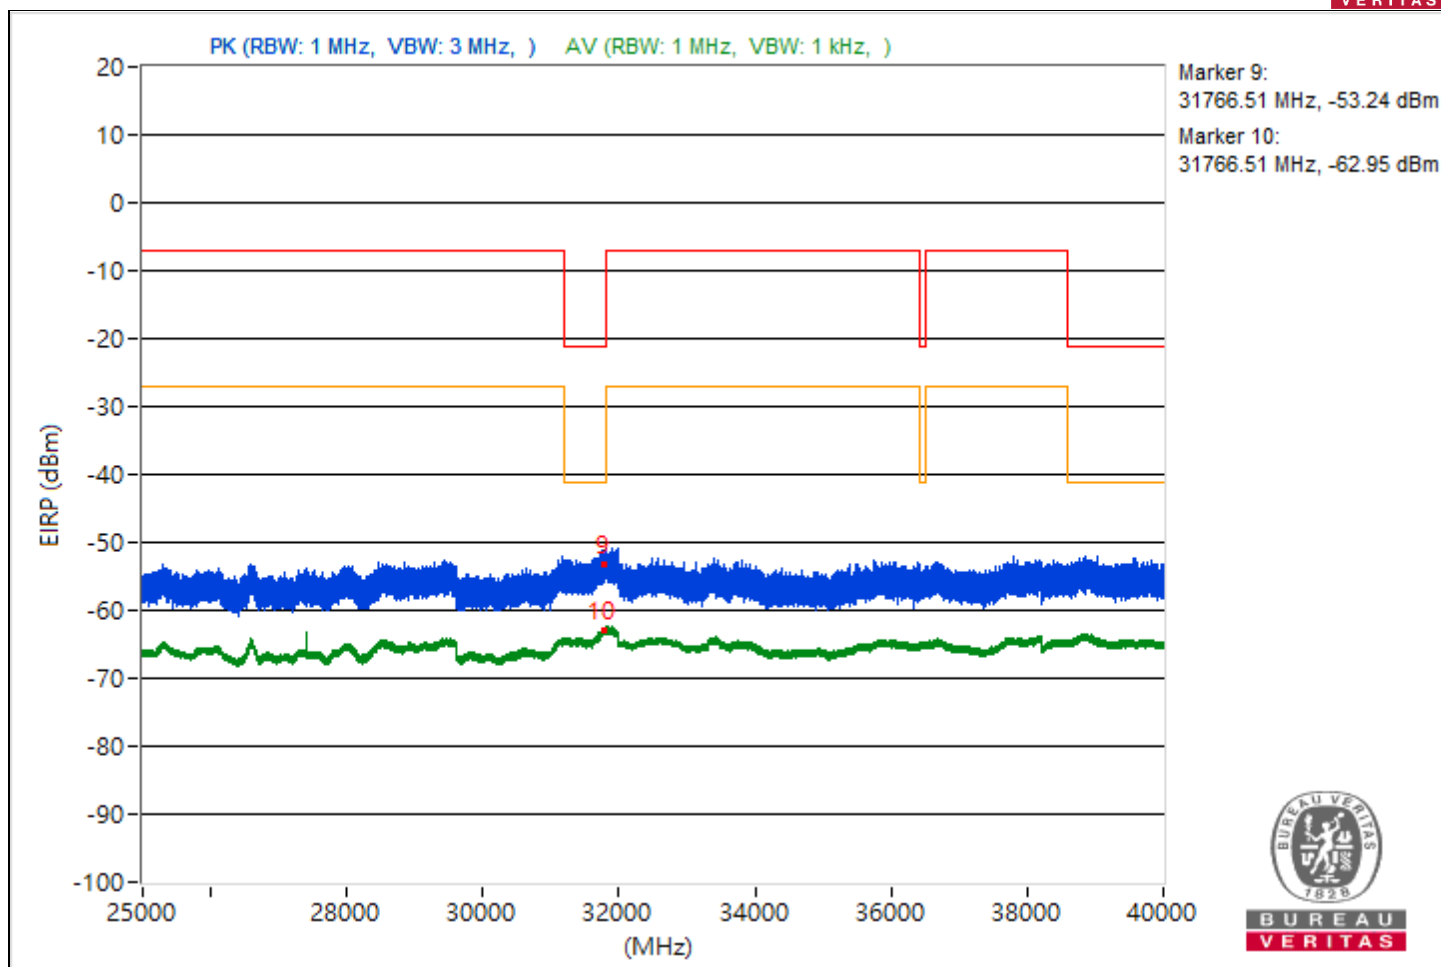


Conducted Band Edges

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 67% RH	Tested By	Tim Chen

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5935.6	97.6 PK			-9.23	-8.45	8.15	2.34
2	*5935.6	87.89 AV			-18.4	-18.65	8.15	-7.37
3	#5924.98	74.25 PK	88.26	-14.01	-31.83	-32.54	8.15	-21.01
4	#5924.98	59.57 AV	68.26	-8.69	-46.95	-46.74	8.15	-35.69

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

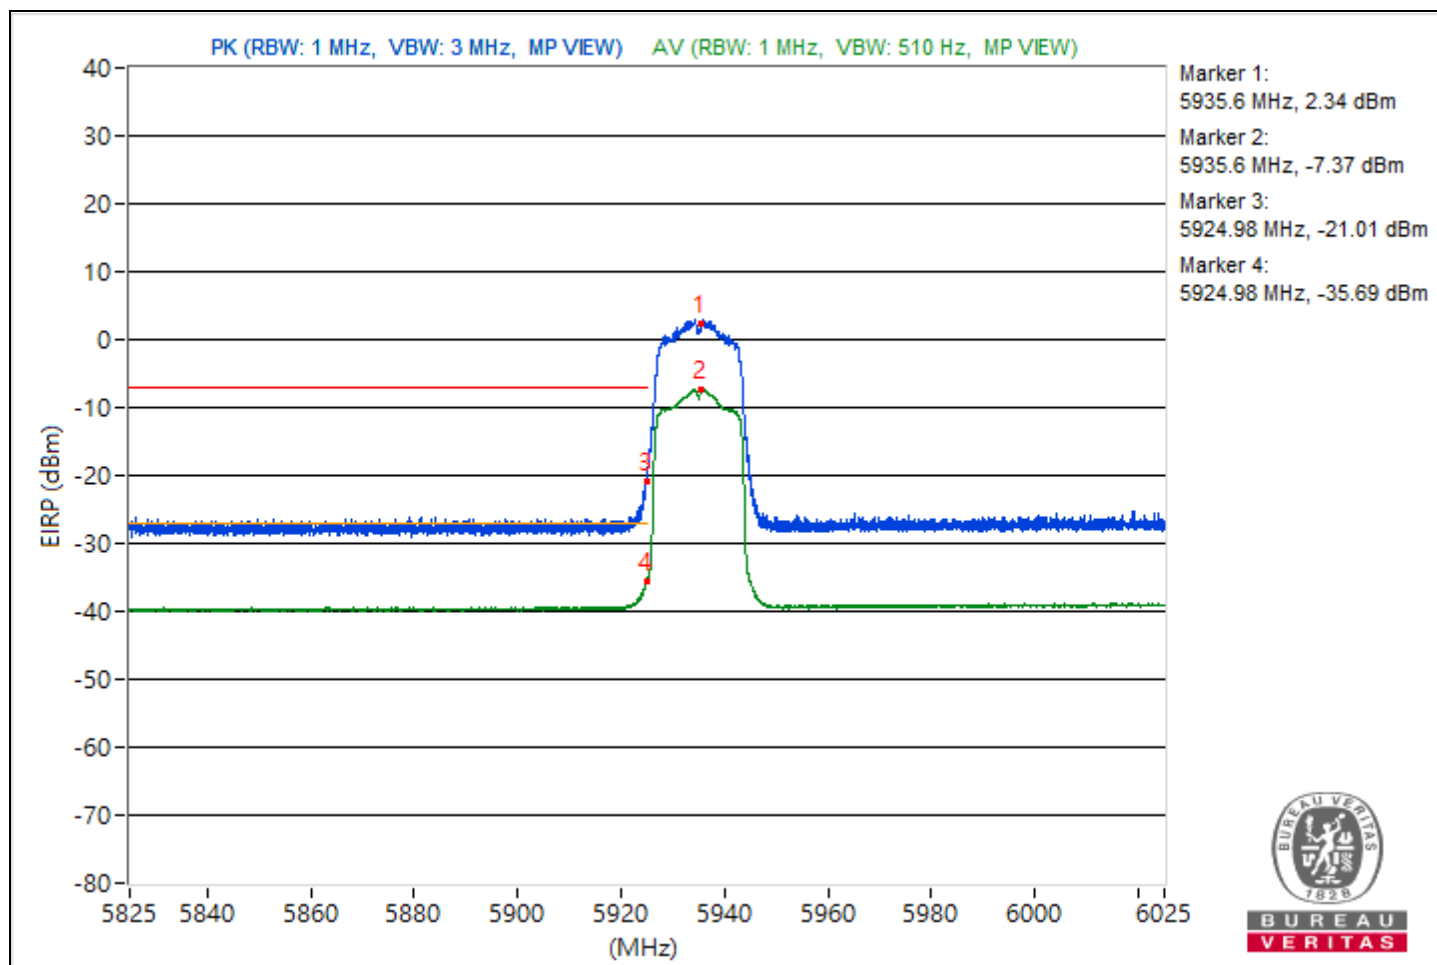


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 67% RH	Tested By	Tim Chen

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5954.12	97.39 PK			-9.29	-8.78	8.15	2.13
2	*5954.12	87.04 AV			-19.03	-19.75	8.15	-8.22
3	#5855.15	67.6 PK	88.26	-20.66	-38.04	-39.76	8.15	-27.66
4	#5855.15	55.9 AV	68.26	-12.36	-50.66	-50.39	8.15	-39.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

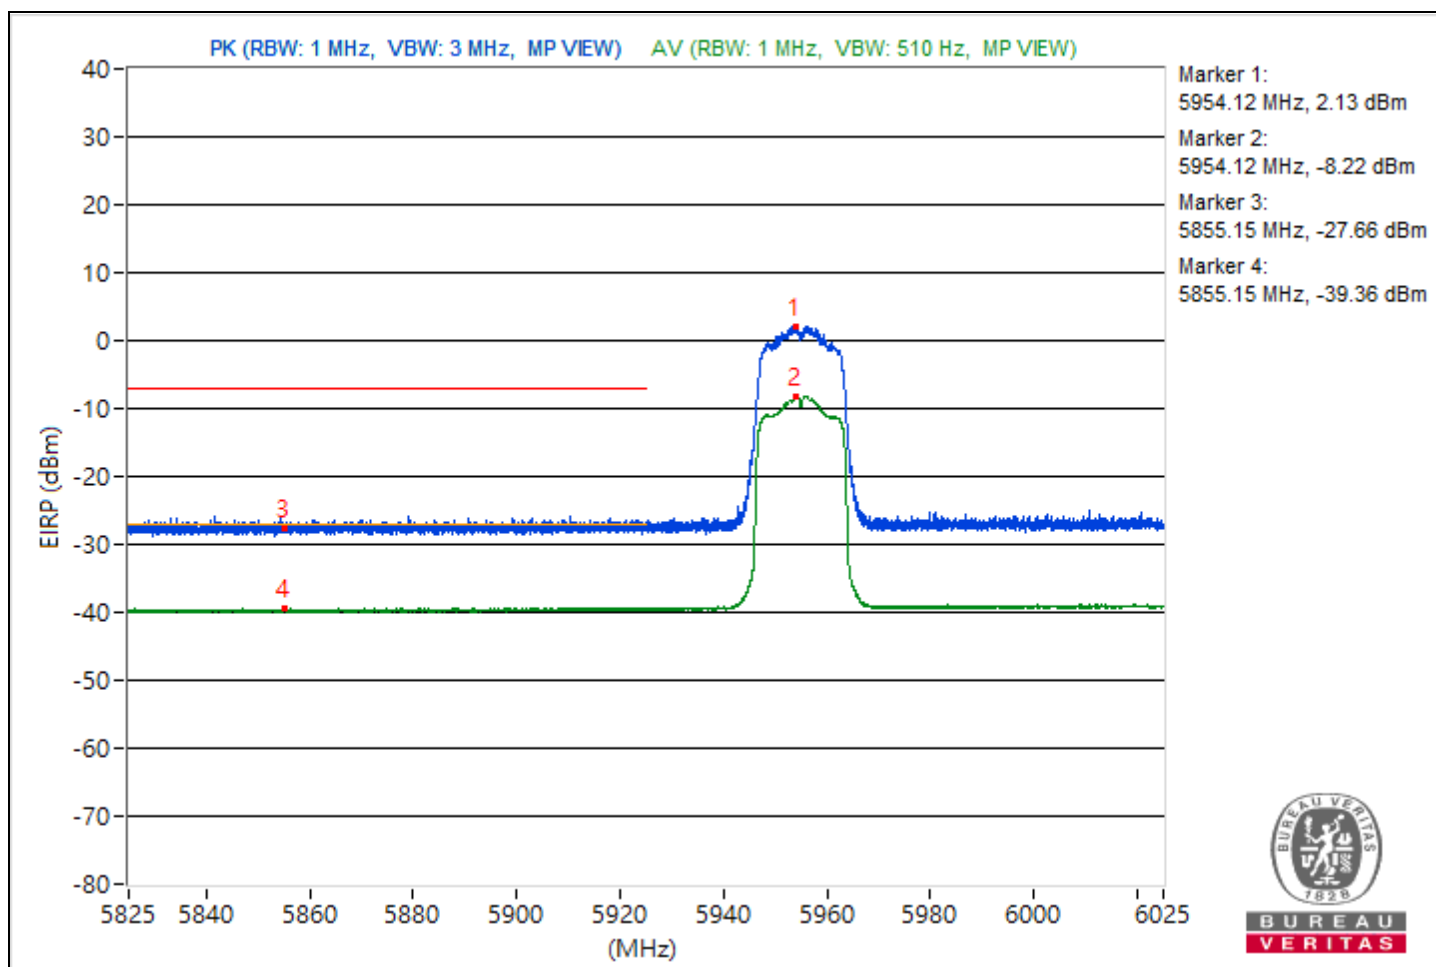


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 65% RH	Tested By	Chris Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6853.76	101.01 PK			-5.5	-5.37	8.17	5.75
2	*6853.76	90.89 AV			-15.52	-15.58	8.17	-4.37
3	#7198.49	74.36 PK	88.26	-13.9	-31.8	-32.37	8.17	-20.9
4	#7198.49	62.82 AV	68.26	-5.44	-43.39	-43.86	8.17	-32.44

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

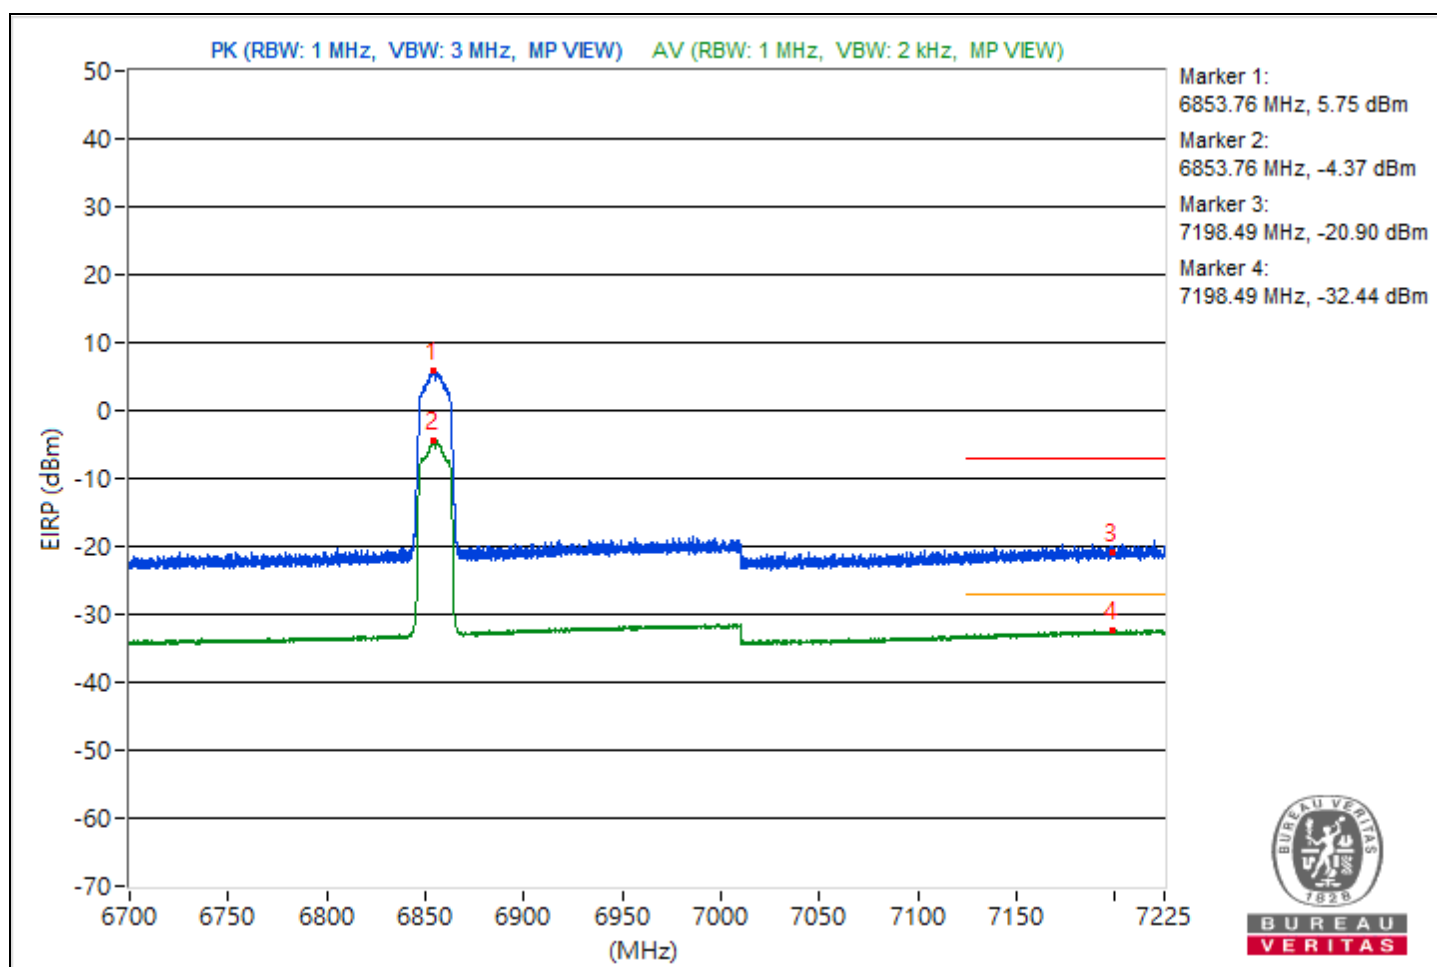


RF Mode	802.11ax (HE20)	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 67% RH	Tested By	Tim Chen

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5933.77	94.92 PK			-11.73	-11.28	8.15	-0.34
2	*5933.77	83.45 AV			-23.06	-22.9	8.15	-11.81
3	#5924.98	79.6 PK	88.26	-8.66	-26.56	-27.09	8.15	-15.66
4	!5924.98	68.64 AV	68.26	0.38	-37.69	-37.87	8.15	-26.62

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer to Mode C and D)

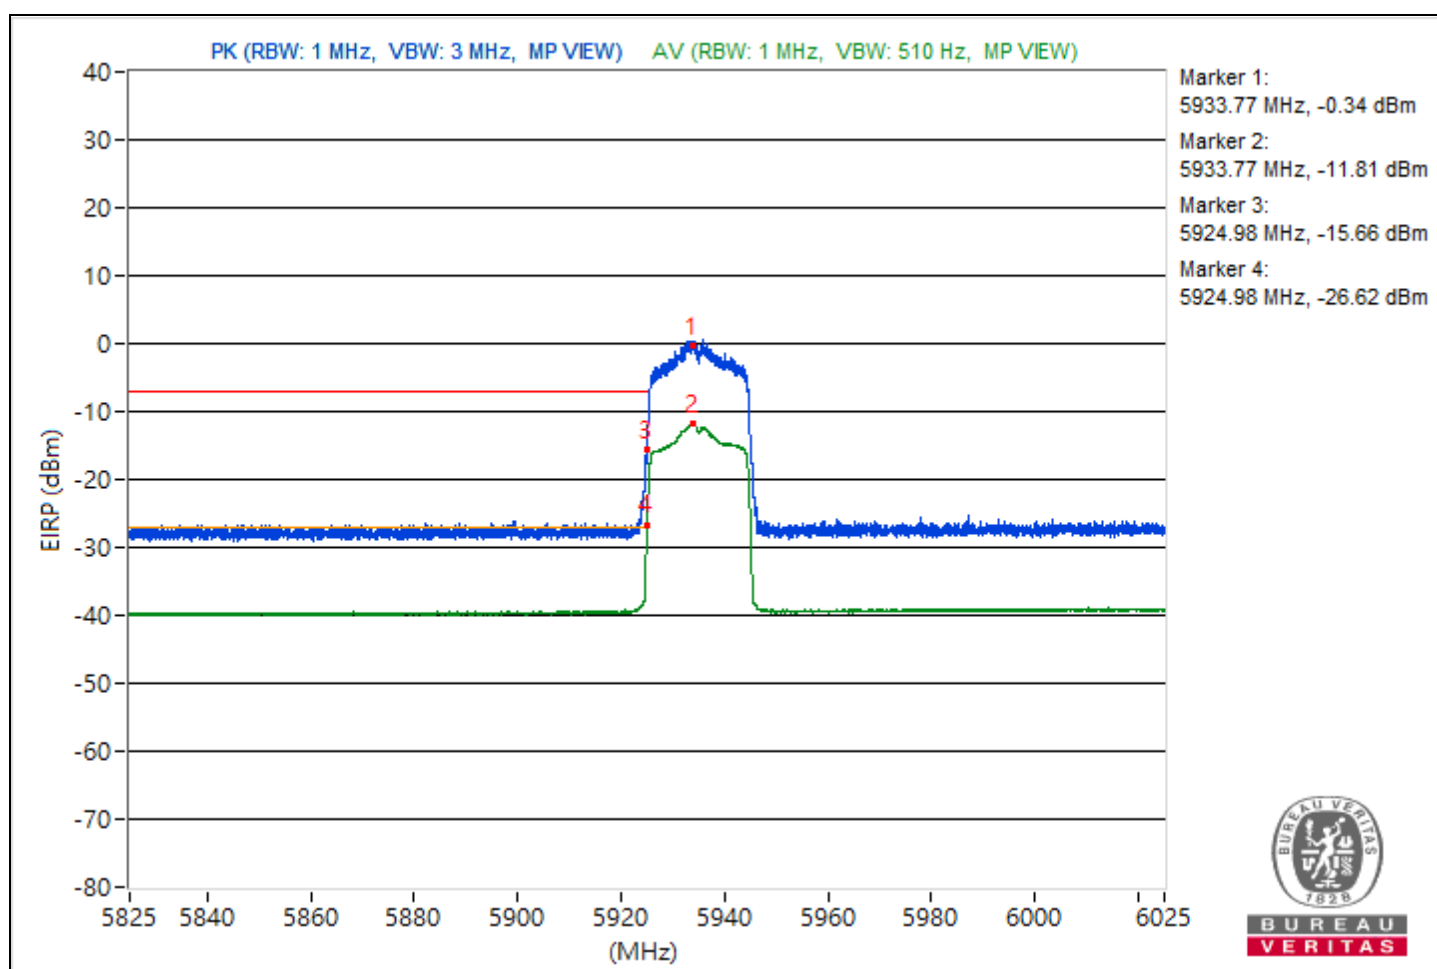


RF Mode	802.11ax (HE20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 67% RH	Tested By	Tim Chen

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5954.05	98.41 PK			-7.75	-8.28	8.15	3.15
2	*5954.05	87.5 AV			-18.98	-18.87	8.15	-7.76
3	#5918.87	67.16 PK	88.26	-21.1	-39.16	-39.37	8.15	-28.1
4	#5918.87	55.84 AV	68.26	-12.42	-50.43	-50.73	8.15	-39.42

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

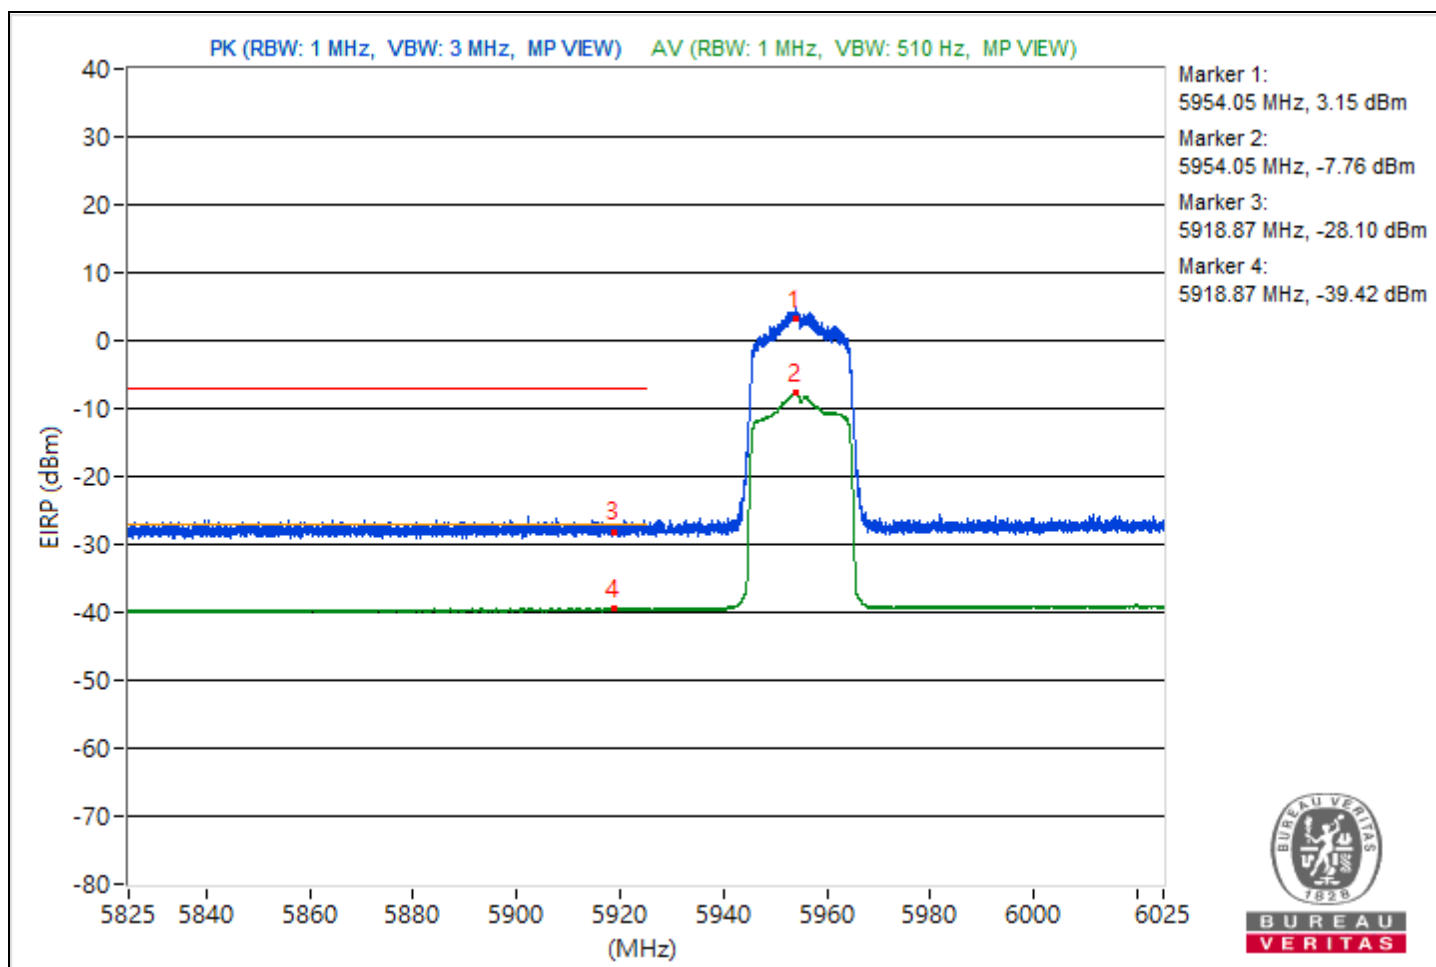


RF Mode	802.11ax (HE20)	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 65% RH	Tested By	Chris Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6853.96	101.89 PK			-4.81	-4.31	8.17	6.63
2	*6853.96	90.7 AV			-15.89	-15.6	8.17	-4.56
3	#7195.99	74.14 PK	88.26	-14.12	-31.88	-32.77	8.17	-21.12
4	#7195.99	62.88 AV	68.26	-5.38	-43.94	-43.21	8.17	-32.38

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

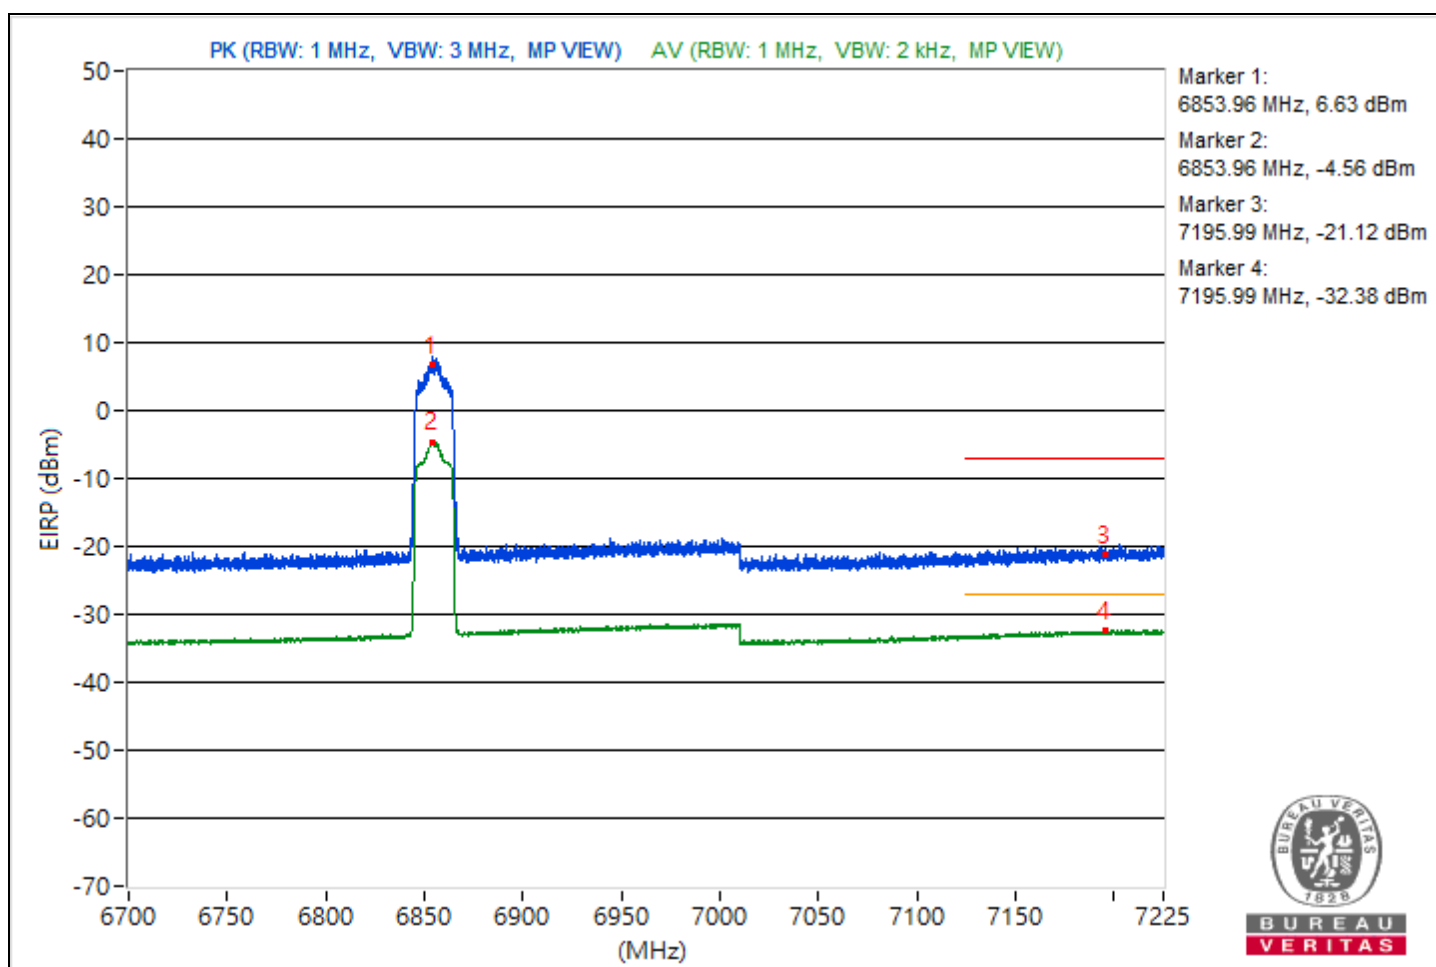


RF Mode	802.11ax (HE40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 67% RH	Tested By	Tim Chen

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5963.2	97.26 PK			-7.36	-12.27	8.15	2
2	*5963.2	86.51 AV			-18.26	-22.59	8.15	-8.75
3	#5917.98	67.58 PK	88.26	-20.68	-39.09	-38.6	8.15	-27.68
4	#5917.98	55.94 AV	68.26	-12.32	-50.34	-50.64	8.15	-39.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

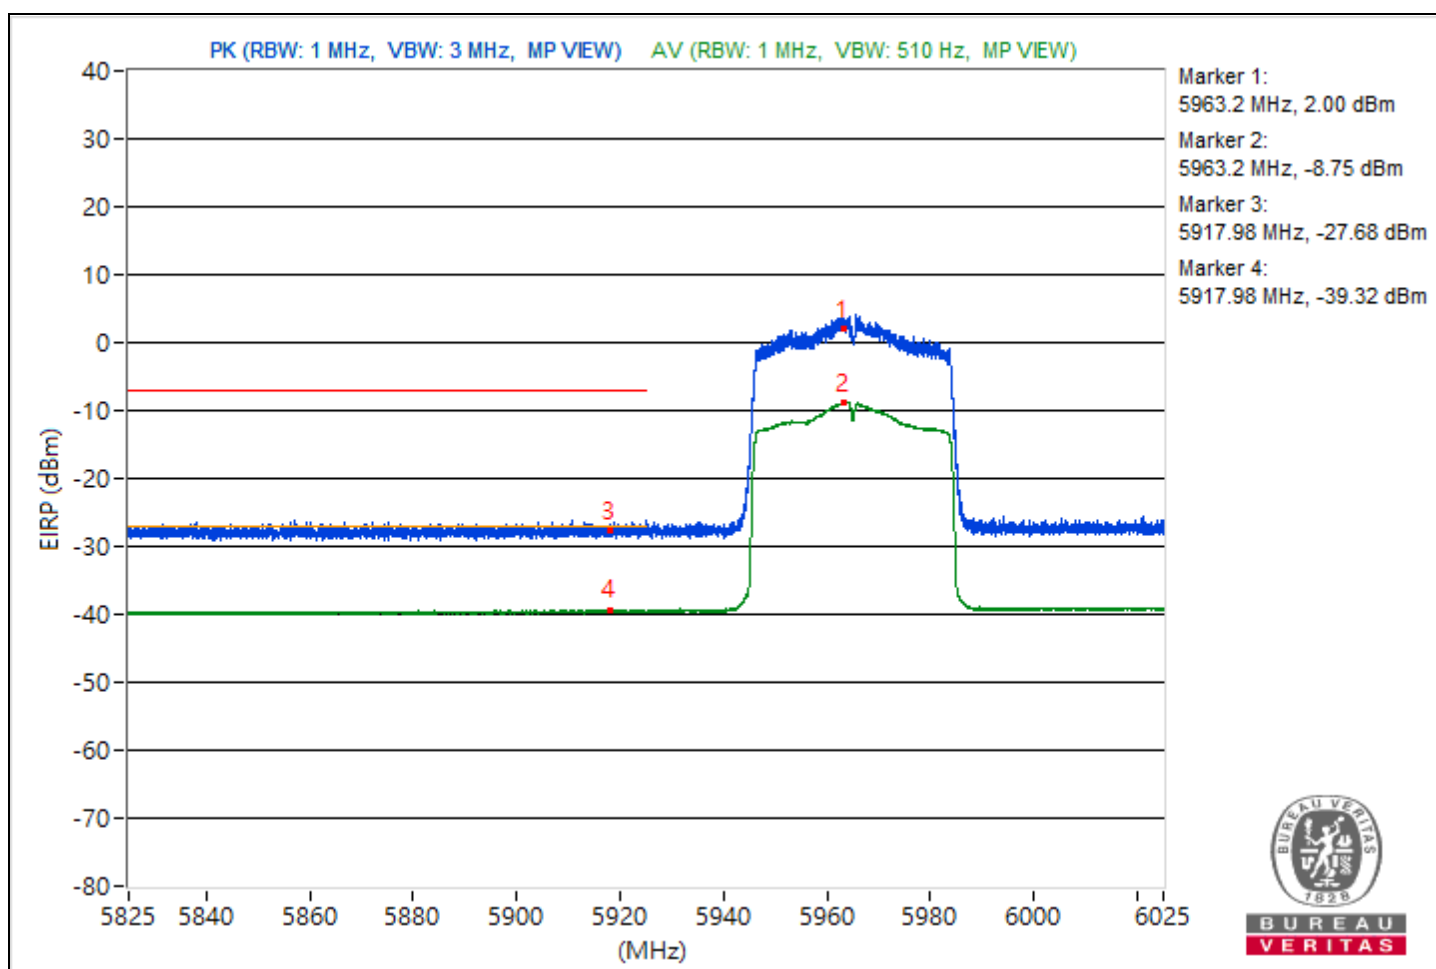


RF Mode	802.11ax (HE40)	Channel	CH 179 : 6845 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 65% RH	Tested By	Chris Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6843.32	101.75 PK			-4.47	-4.93	8.17	6.49
2	*6843.32	91.25 AV			-15.07	-15.32	8.17	-4.01
3	#7206.03	74.32 PK	88.26	-13.94	-31.7	-32.57	8.17	-20.94
4	#7206.03	62.82 AV	68.26	-5.44	-43.3	-43.96	8.17	-32.44

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

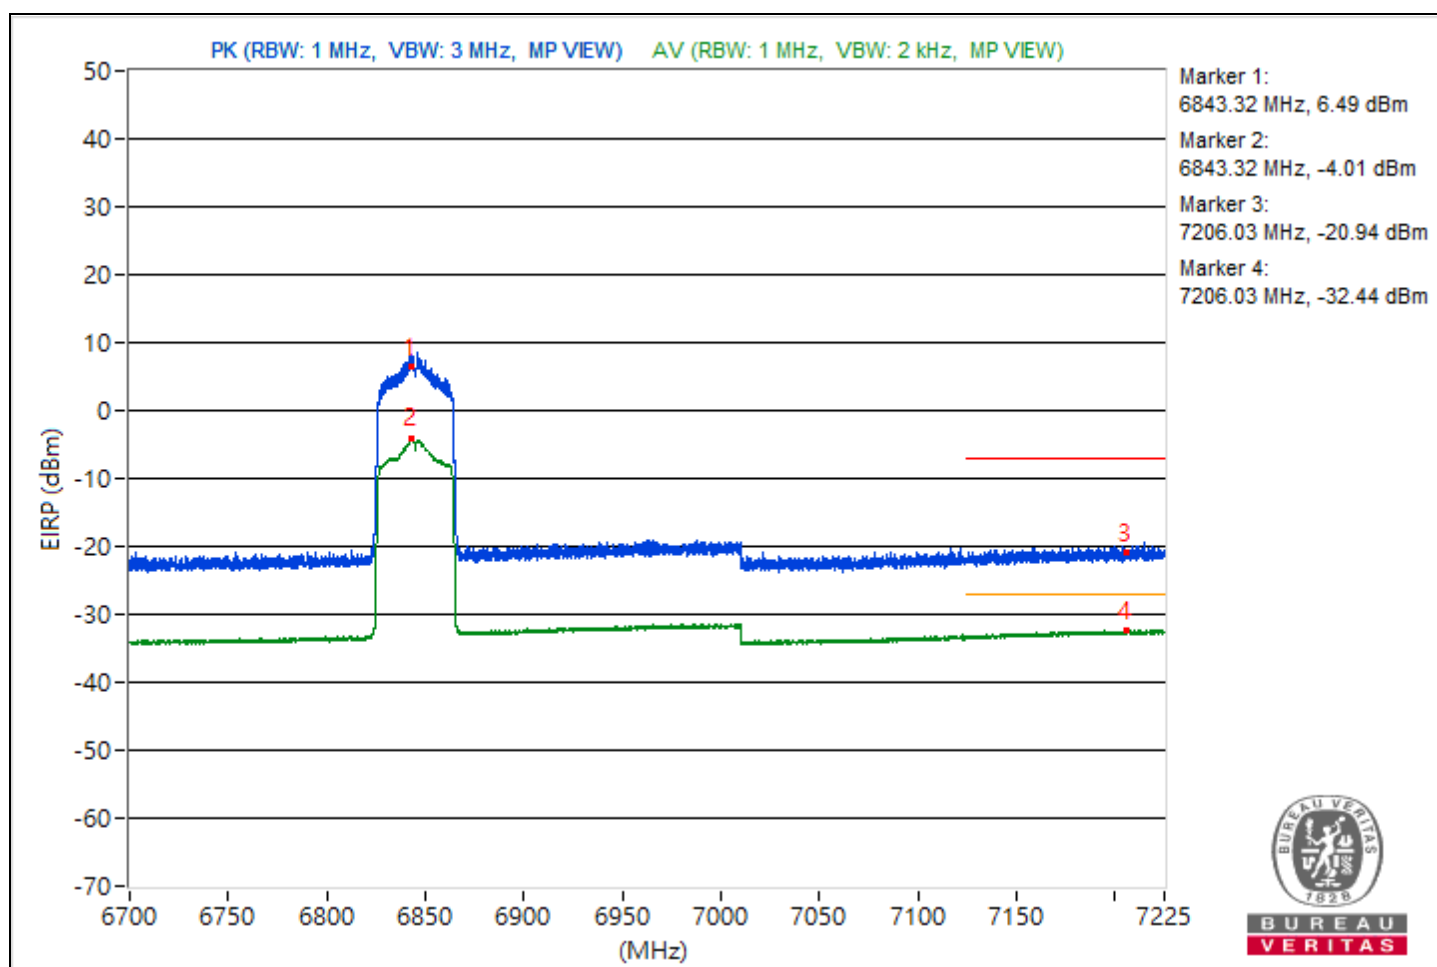


RF Mode	802.11ax (HE80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 67% RH	Tested By	Tim Chen

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5986.57	99.53 PK			-6.04	-7.95	8.15	4.27
2	*5986.57	88.9 AV			-16.59	-18.7	8.15	-6.36
3	#5911.18	68.21 PK	88.26	-20.05	-38.82	-37.67	8.15	-27.05
4	#5911.18	55.99 AV	68.26	-12.27	-50.87	-50.04	8.15	-39.27

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

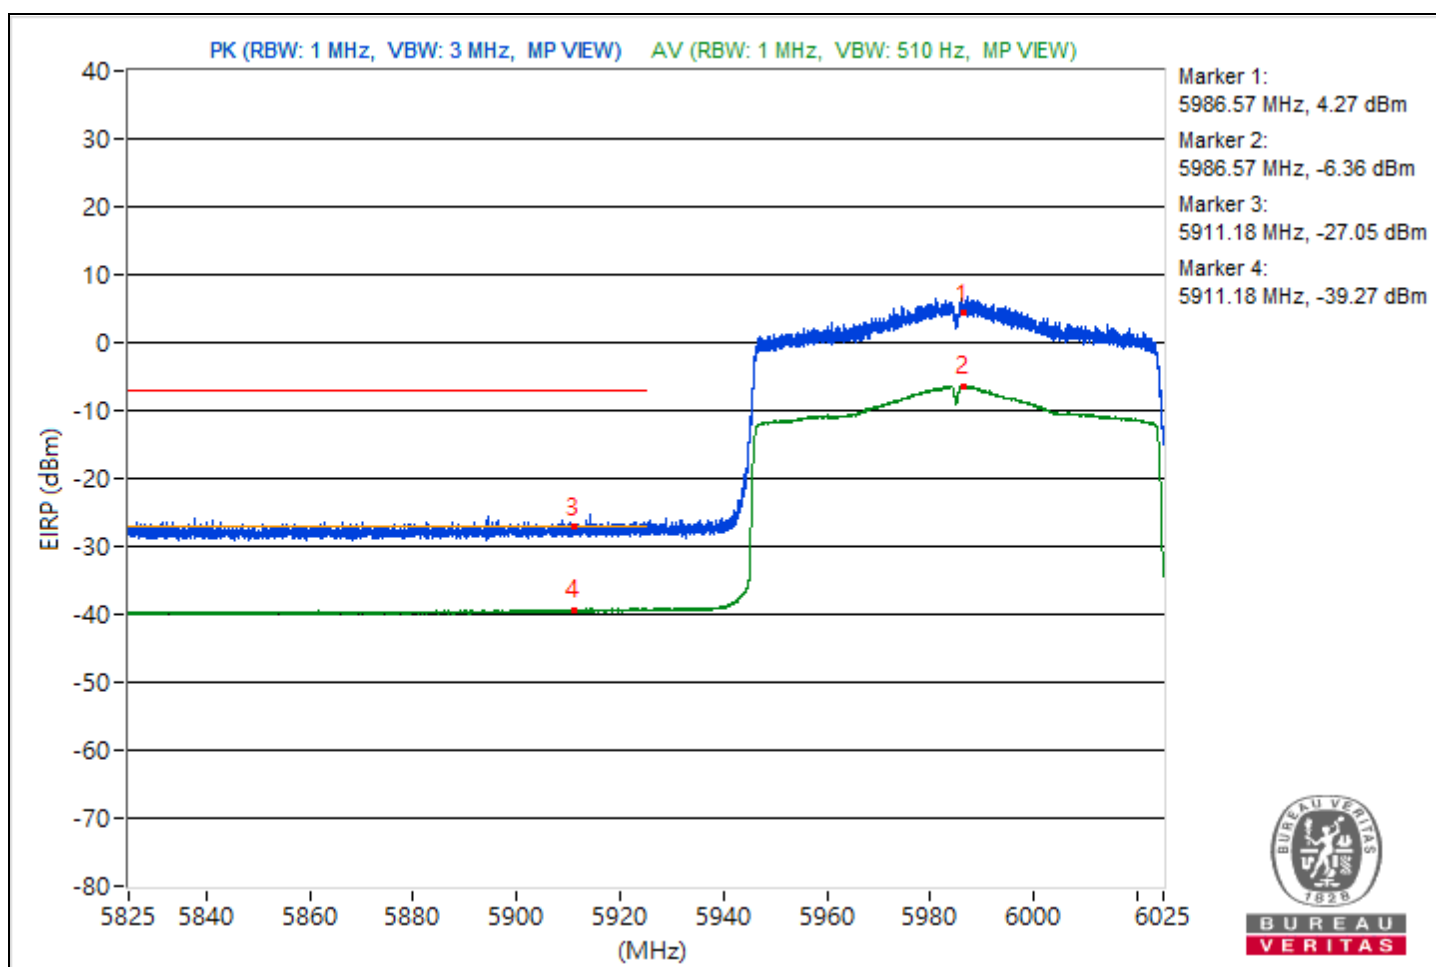


RF Mode	802.11ax (HE80)	Channel	CH 167 : 6785 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 65% RH	Tested By	Chris Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6783.02	102.44 PK			-4.3	-3.72	8.17	7.18
2	*6783.02	90.83 AV			-15.68	-15.53	8.17	-4.43
3	#7222.05	74.18 PK	88.26	-14.08	-31.84	-32.73	8.17	-21.08
4	#7222.05	62.96 AV	68.26	-5.3	-43.81	-43.18	8.17	-32.3

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

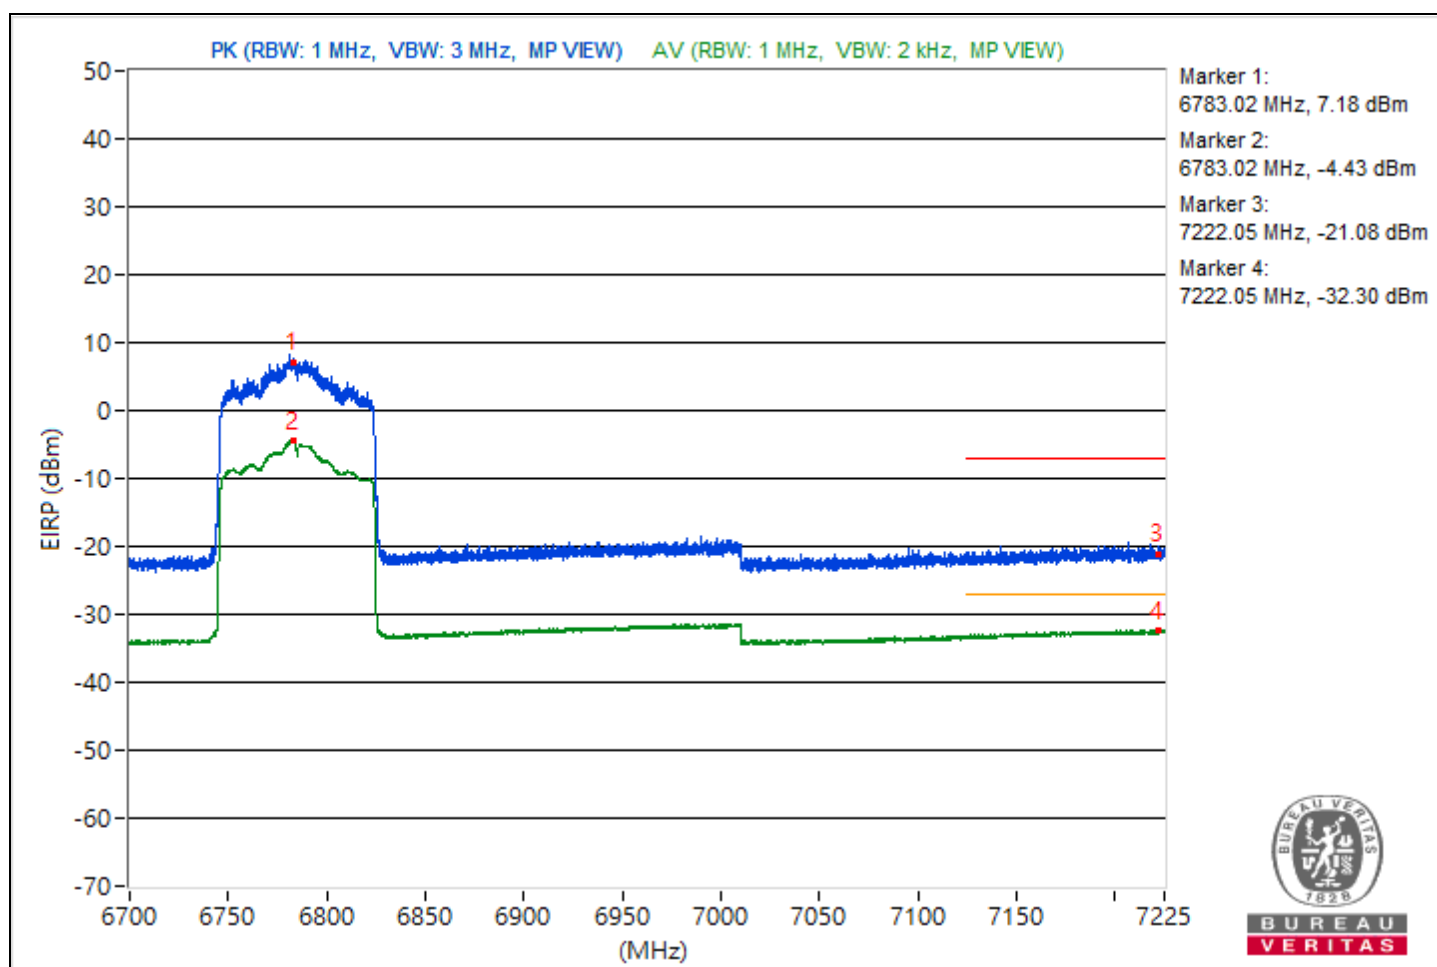


RF Mode	802.11ax (HE160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 67% RH	Tested By	Tim Chen

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.37	99.4 PK			-6.63	-7.46	8.15	4.14
2	*6022.37	87.91 AV			-18.84	-18.21	8.15	-7.35
3	#5888.18	67.51 PK	88.26	-20.75	-39.27	-38.57	8.15	-27.75
4	#5888.18	56.01 AV	68.26	-12.25	-50.15	-50.68	8.15	-39.25

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

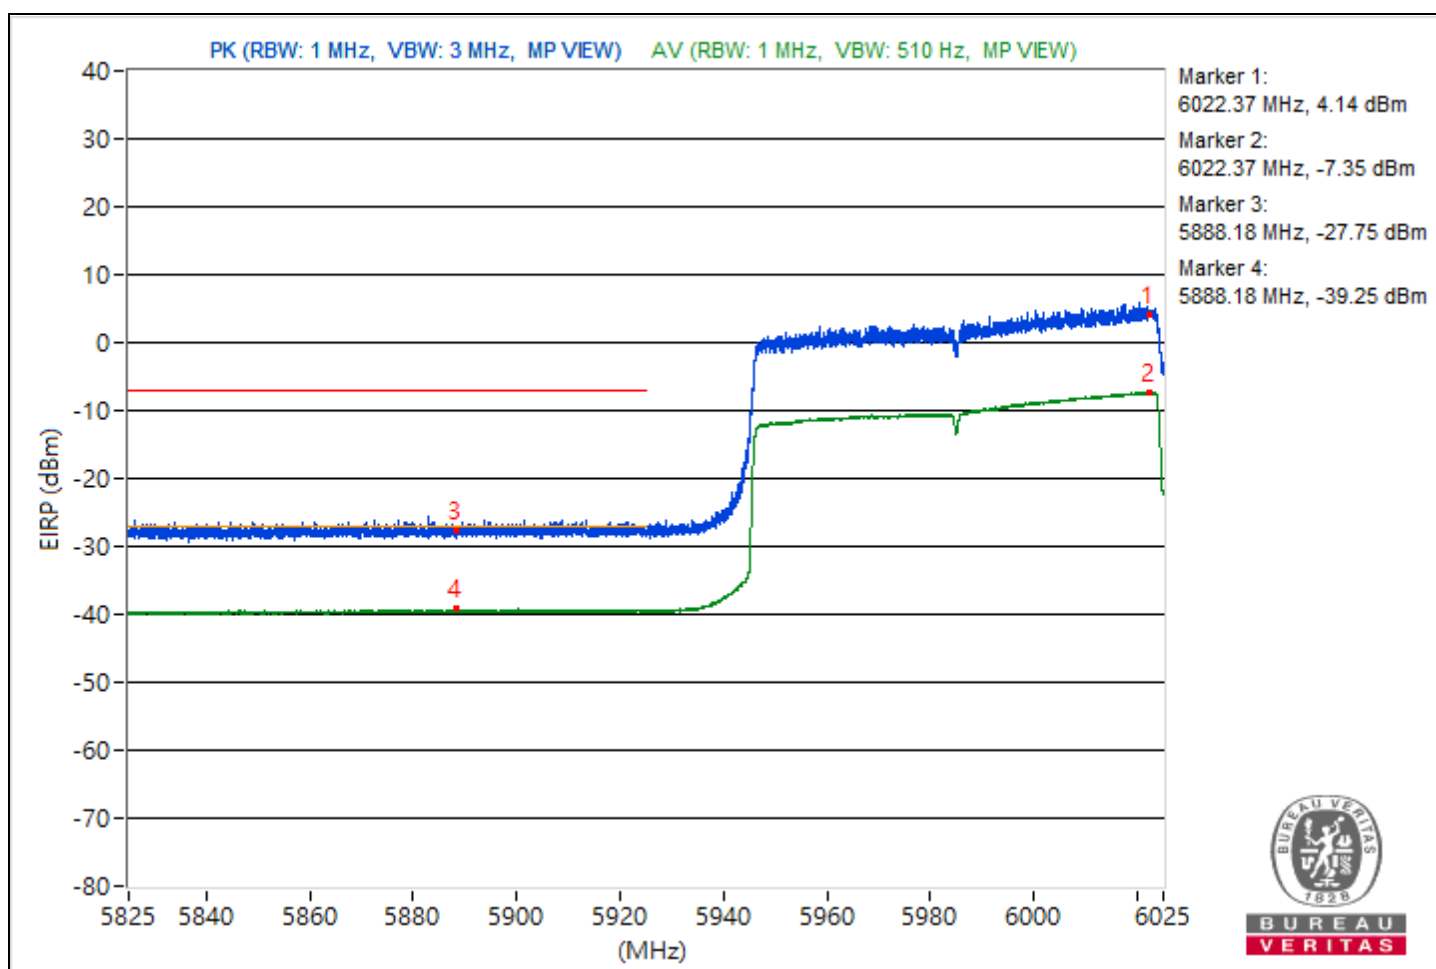


RF Mode	802.11ax (HE160)	Channel	CH 143 : 6665 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 65% RH	Tested By	Chris Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6701.97	95.55 PK			-7.88	8.17	0.29	-35.96
2	*6701.97	84.24 AV			-19.19	8.17	-11.02	-47.03
3	#7223.69	71.48 PK	88.26	-16.78	-31.95	8.17	-23.78	
4	#7223.69	60.09 AV	68.26	-8.17	-43.34	8.17	-35.17	

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

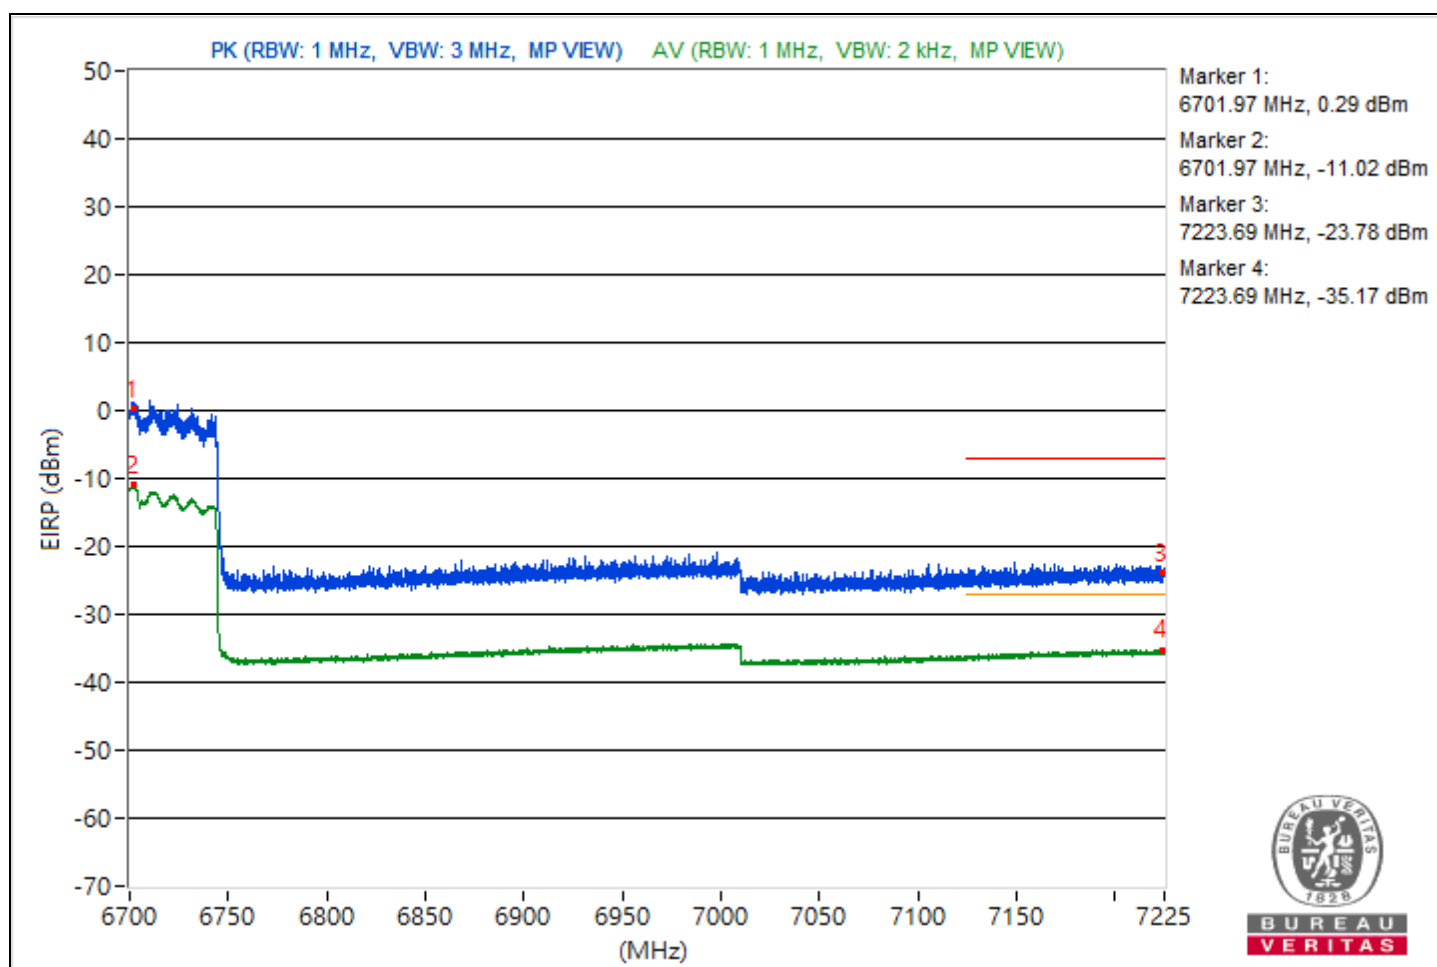


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 67% RH	Tested By	Tim Chen

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5926.93	93.36 PK			-12.92	-13.2	8.15	-1.9
2	*5926.93	81.73 AV			-24.67	-24.71	8.15	-13.53
3	#5924.98	82.22 PK	88.26	-6.04	-24.23	-24.18	8.15	-13.04
4	!#5924.98	68.71 AV	68.26	0.45	-37.68	-37.74	8.15	-26.55

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer to Mode C and D)

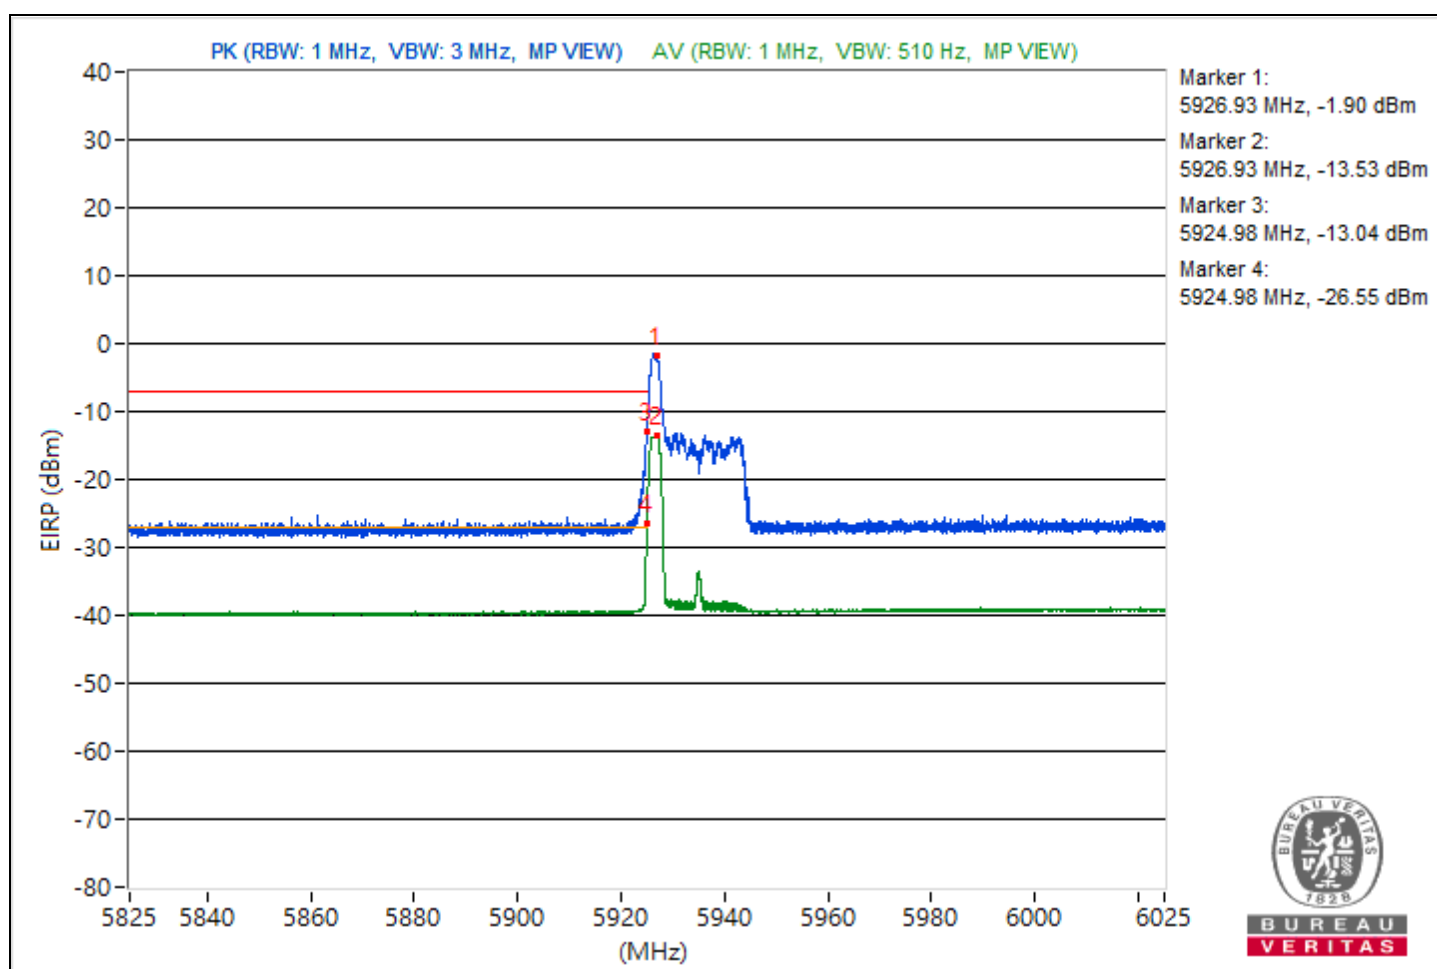


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 67% RH	Tested By	Tim Chen

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.87	100.99 PK			-5.24	-5.63	8.15	5.73
2	*5946.87	89.29 AV			-17.2	-17.07	8.15	-5.97
3	#5921.3	67.93 PK	88.26	-20.33	-38.93	-38.09	8.15	-27.33
4	#5921.3	55.86 AV	68.26	-12.4	-50.35	-50.79	8.15	-39.4

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

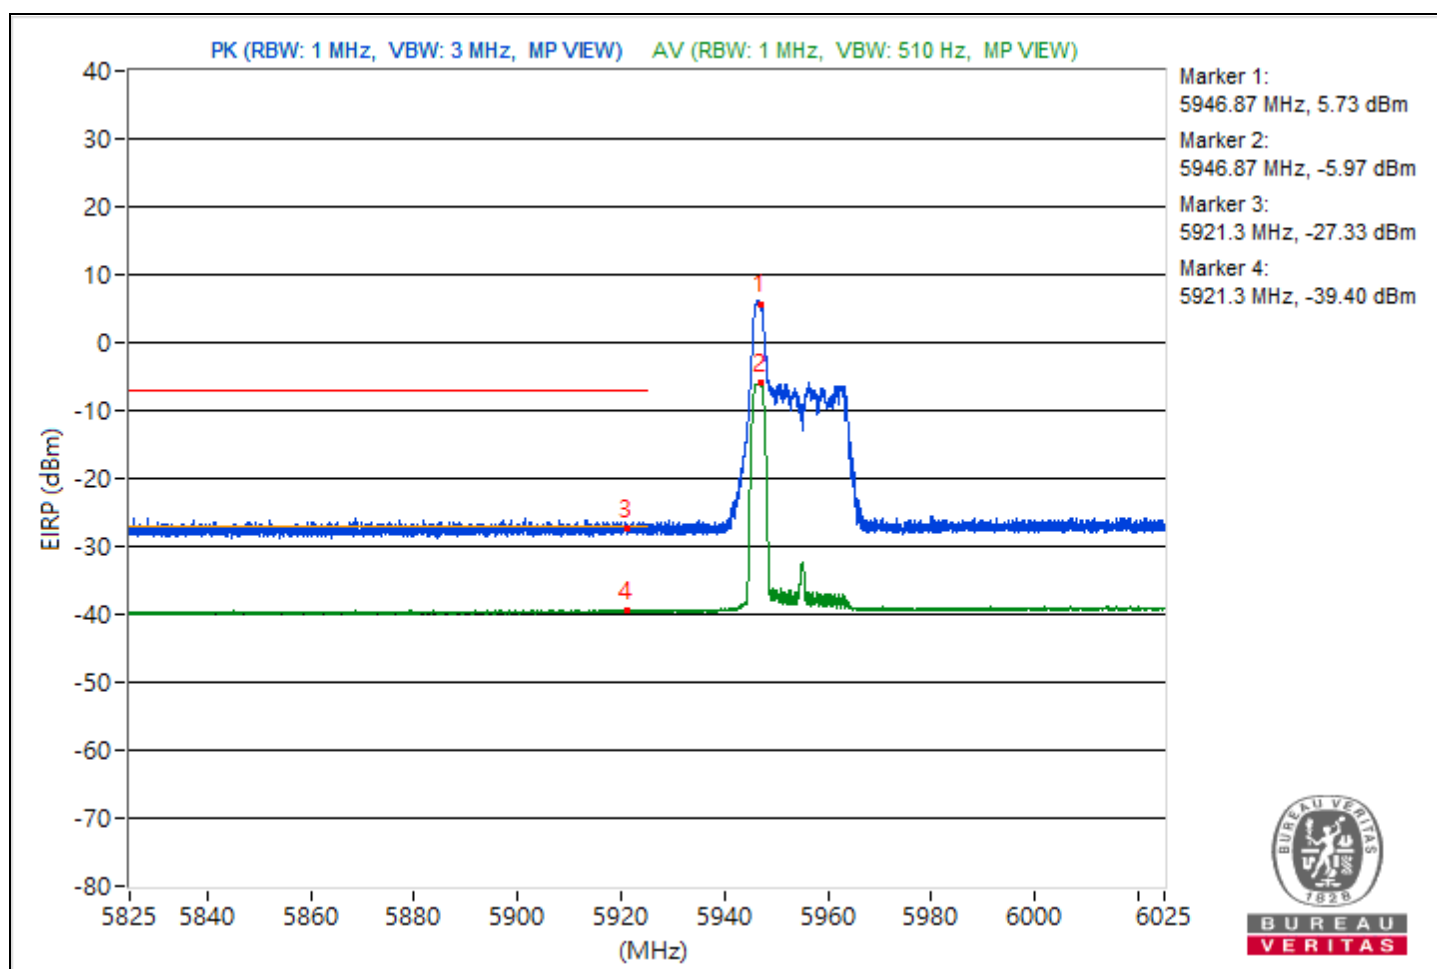


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 65% RH	Tested By	Chris Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6863.34	102.01 PK			-4.38	-4.48	8.17	6.75
2	*6863.34	90.56 AV			-15.88	-15.89	8.17	-4.7
3	#7220.21	74.02 PK	88.26	-14.24	-31.68	-33.31	8.17	-21.24
4	#7220.21	62.87 AV	68.26	-5.39	-43.73	-43.41	8.17	-32.39

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

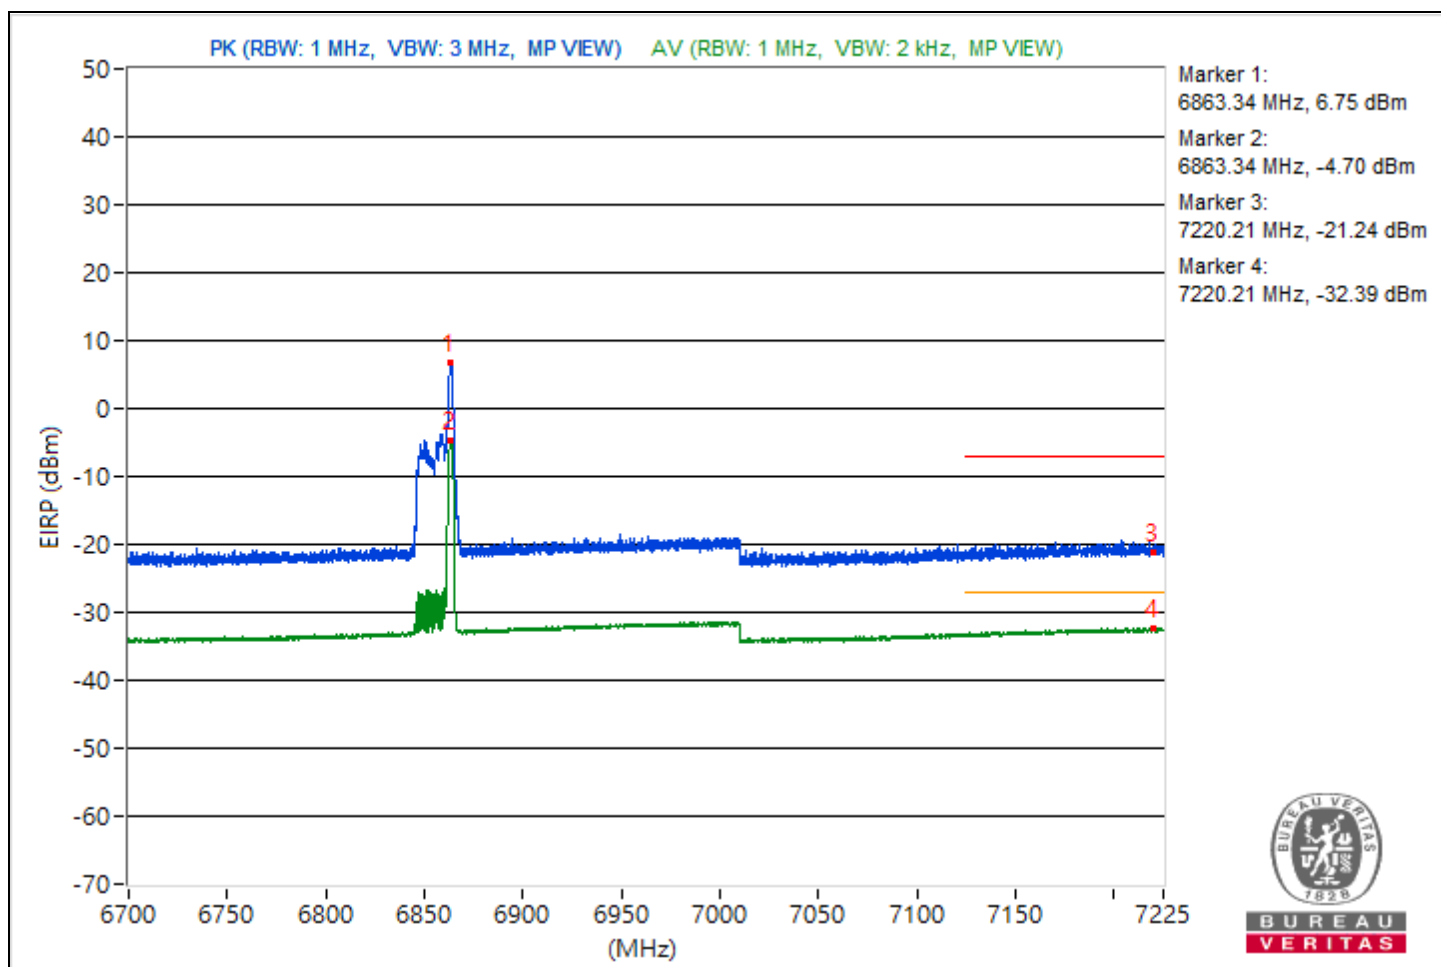


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 67% RH	Tested By	Tim Chen

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5927.8	94.2 PK			-12.23	-12.2	8.15	-1.06
2	*5927.8	81.54 AV			-24.94	-24.82	8.15	-13.72
3	#5924.98	81.42 PK	88.26	-6.84	-24.88	-25.12	8.15	-13.84
4	!5924.98	68.52 AV	68.26	0.26	-37.8	-38	8.15	-26.74

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer to Mode C and D)

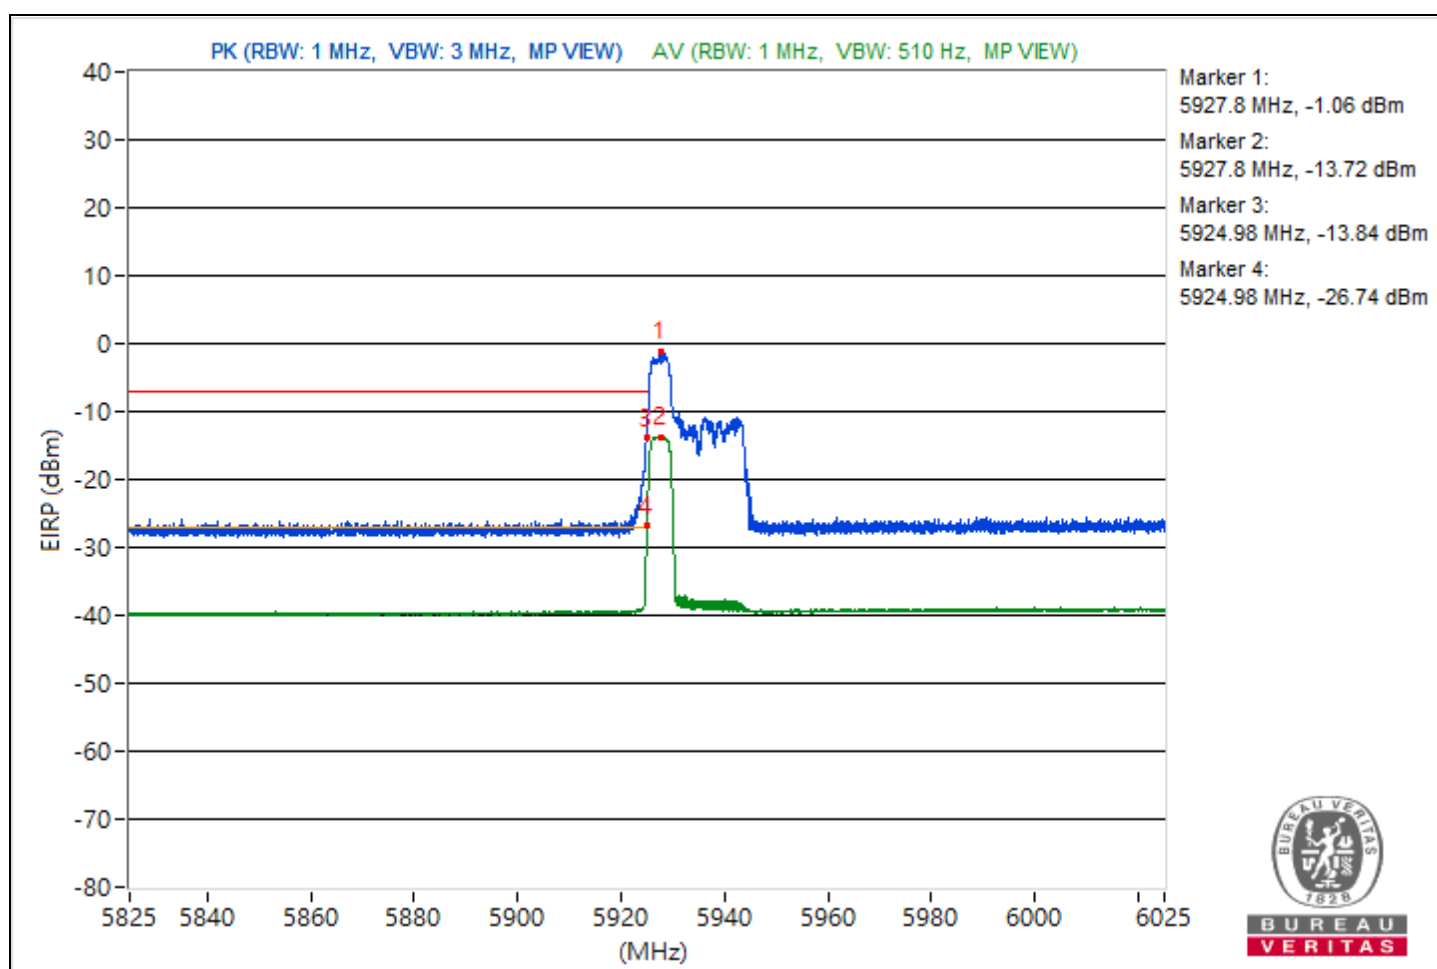


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 67% RH	Tested By	Tim Chen

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5948.02	100.1 PK			-6.3	-6.34	8.15	4.84
2	*5948.02	89.29 AV			-17.07	-17.19	8.15	-5.97
3	#5924.85	67.7 PK	88.26	-20.56	-38.14	-39.38	8.15	-27.56
4	#5924.85	55.9 AV	68.26	-12.36	-50.41	-50.64	8.15	-39.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

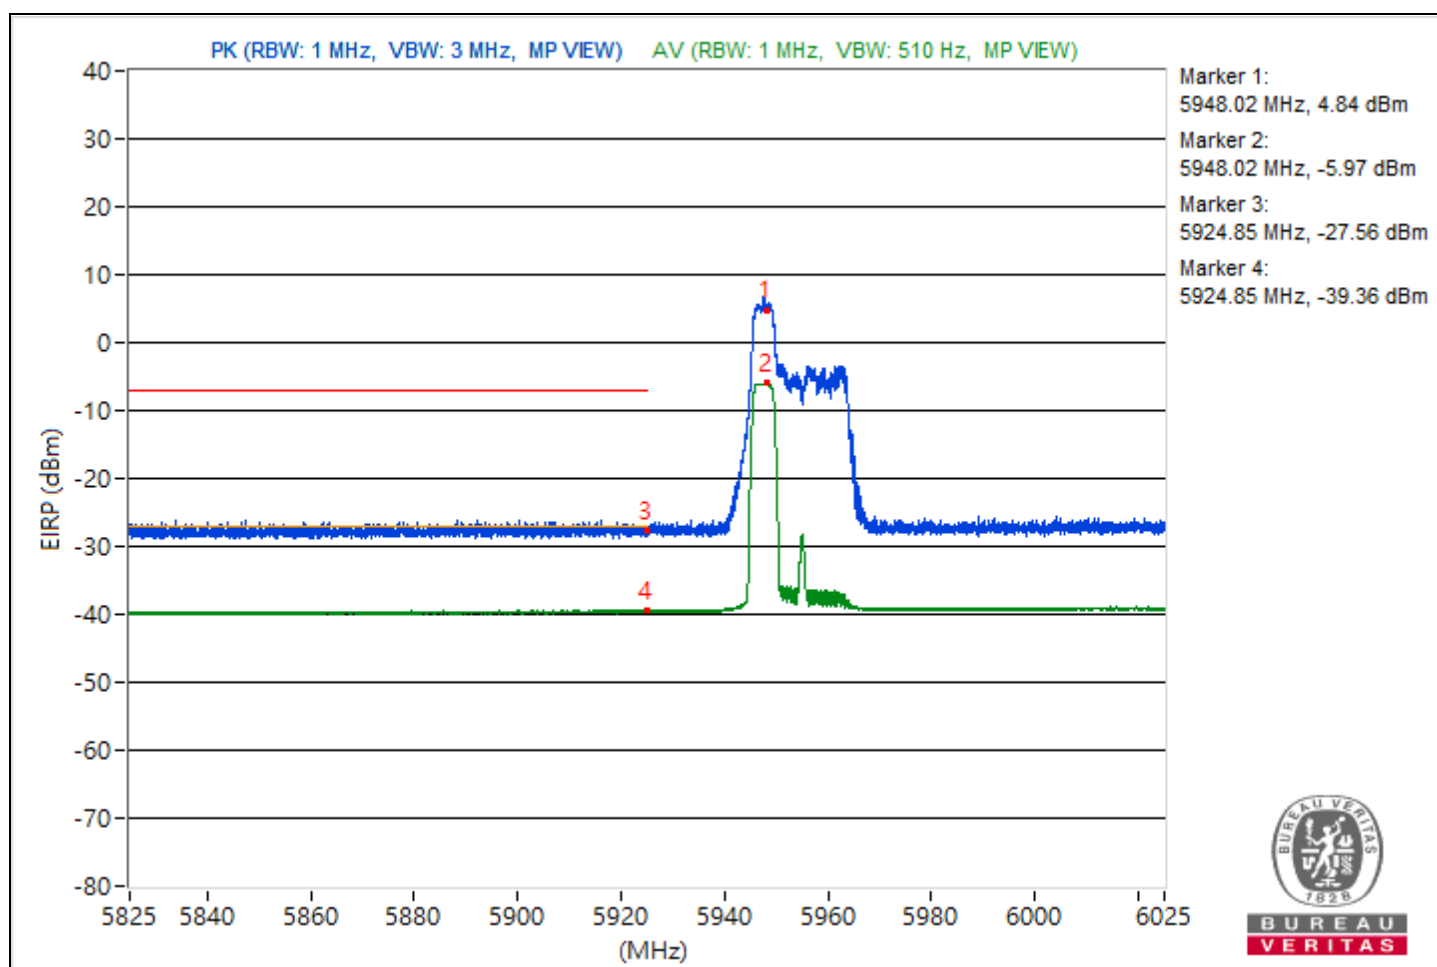


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 65% RH	Tested By	Chris Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6861.63	100.8 PK			-5.57	-5.7	8.17	5.54
2	*6861.63	89.85 AV			-16.55	-16.62	8.17	-5.41
3	#7209.91	74.58 PK	88.26	-13.68	-32.04	-31.68	8.17	-20.68
4	#7209.91	63.04 AV	68.26	-5.22	-43.1	-43.72	8.17	-32.22

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

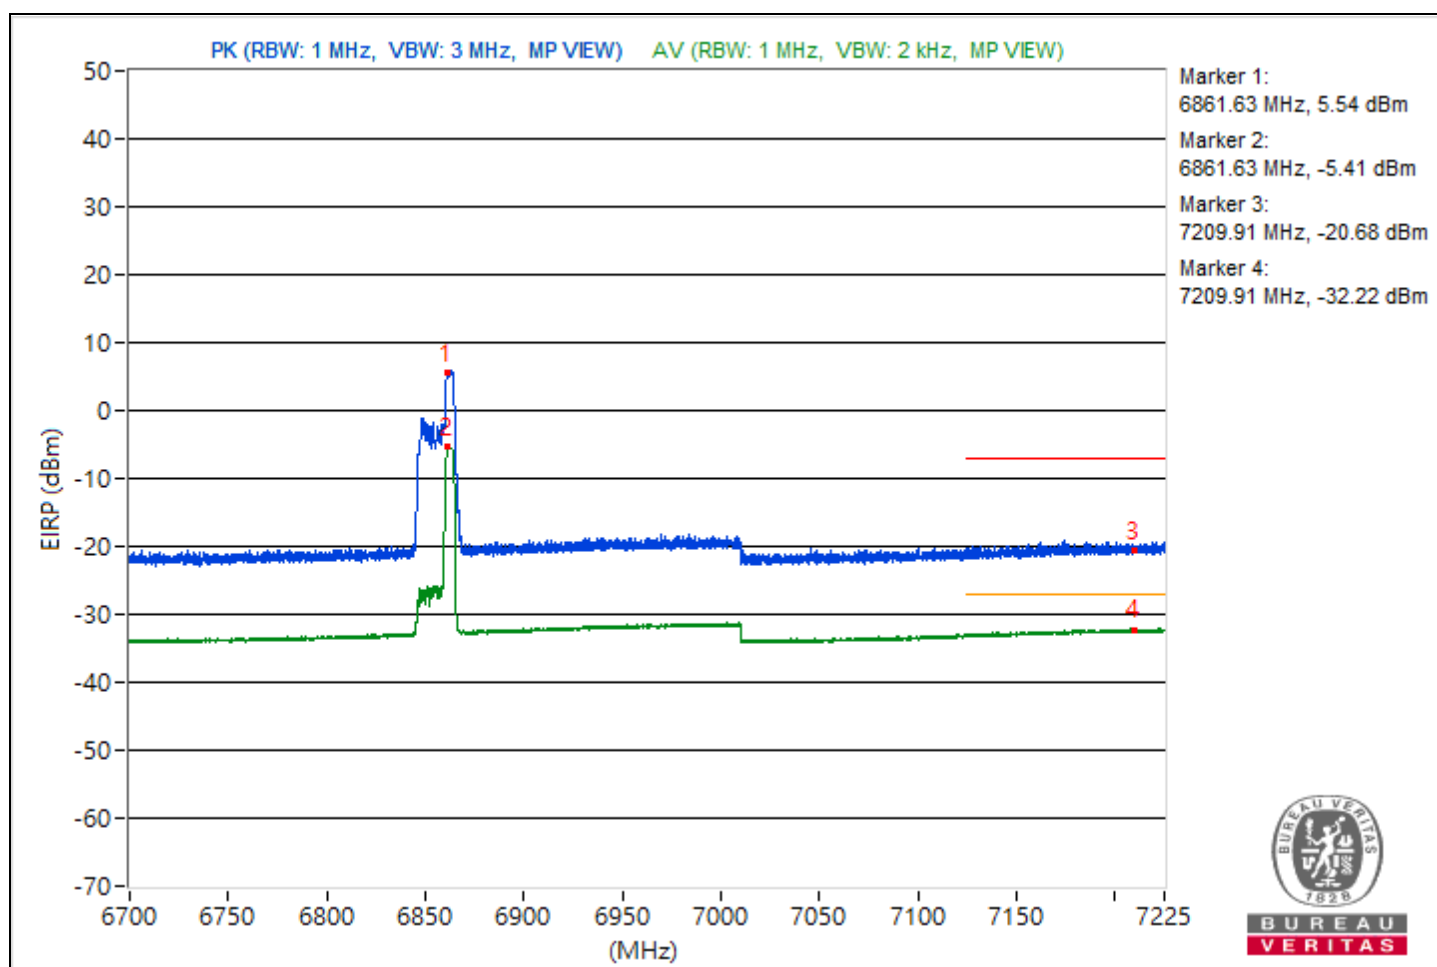


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 67% RH	Tested By	Tim Chen

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5927.27	90.11 PK			-15.32	-17.61	8.15	-5.15
2	*5927.27	78.92 AV			-26.48	-28.85	8.15	-16.34
3	#5924.98	80.08 PK	88.26	-8.18	-25.4	-27.56	8.15	-15.18
4	!#5924.98	68.54 AV	68.26	0.28	-37.23	-38.65	8.15	-26.72

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer to Mode C and D)

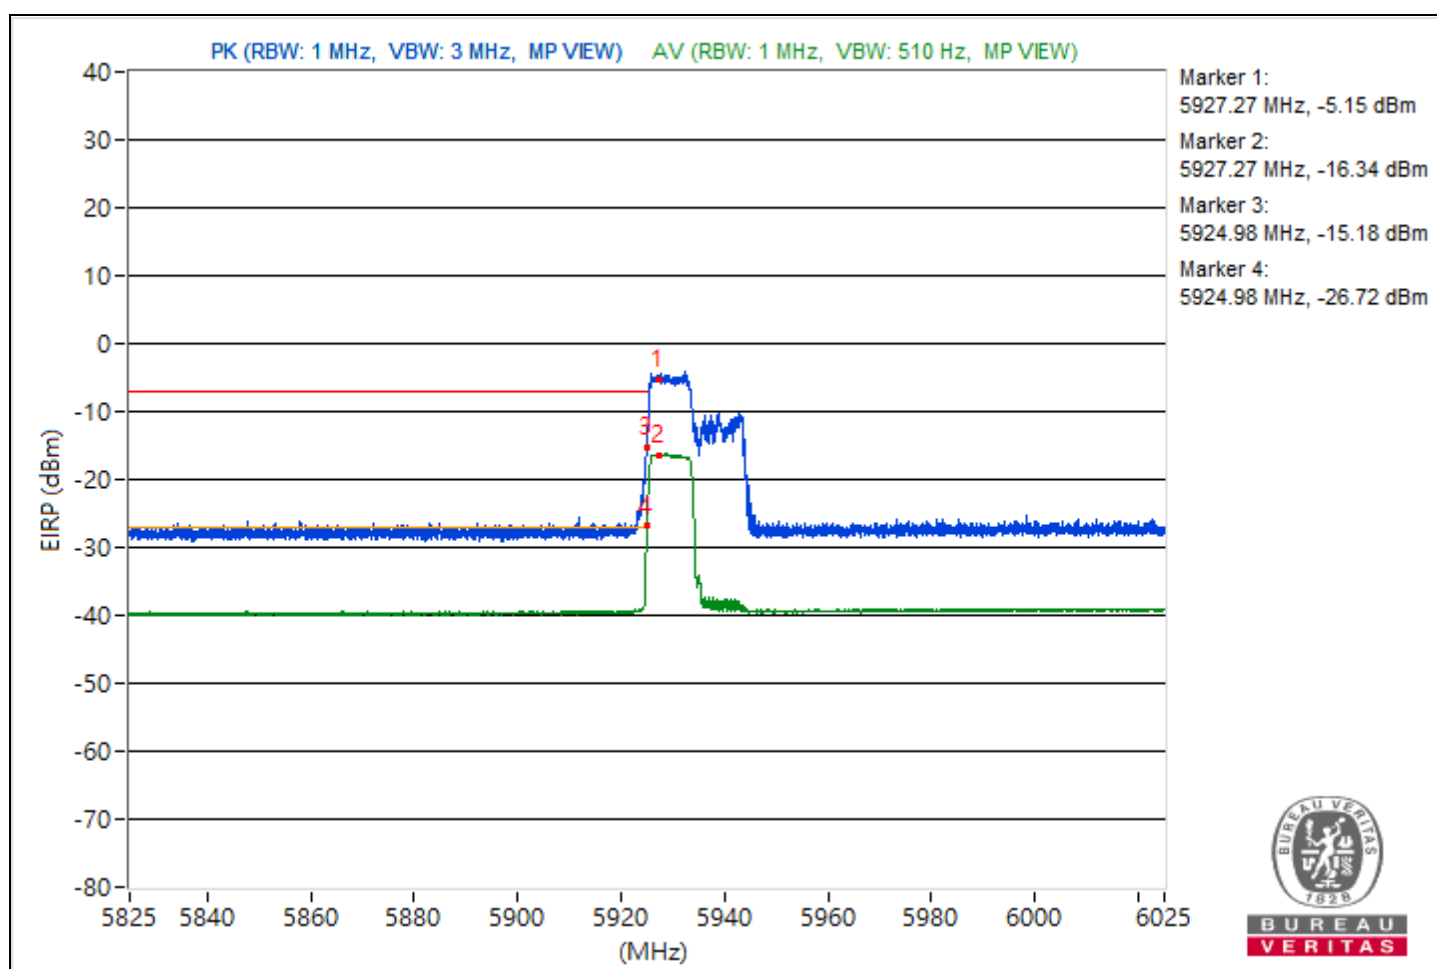


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 67% RH	Tested By	Tim Chen

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5947.55	99.75 PK			-5.36	-8.56	8.15	4.49
2	*5947.55	88.29 AV			-16.57	-20.61	8.15	-6.97
3	#5916.1	68.14 PK	88.26	-20.12	-39.05	-37.63	8.15	-27.12
4	#5916.1	55.81 AV	68.26	-12.45	-50.36	-50.88	8.15	-39.45

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

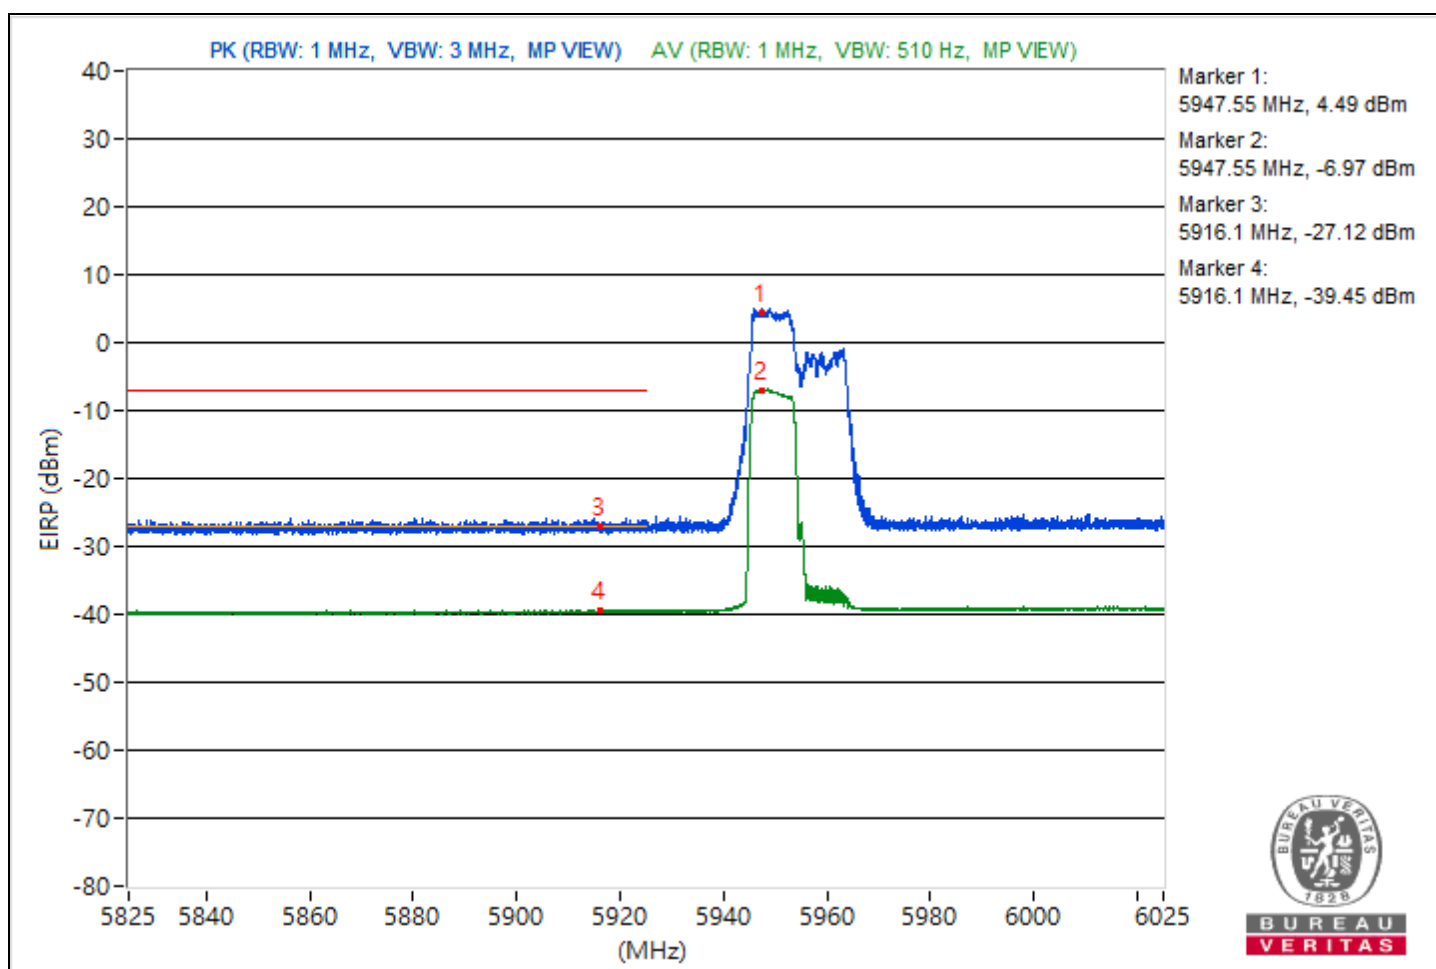


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 65% RH	Tested By	Chris Lin

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6862.95	101.23 PK			-5.24	-5.19	8.17	5.97
2	*6862.95	90.02 AV			-16.4	-16.45	8.17	-5.24
3	#7219.55	74.42 PK	88.26	-13.84	-31.8	-32.26	8.17	-20.84
4	#7219.55	62.99 AV	68.26	-5.27	-43.79	-43.14	8.17	-32.27

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

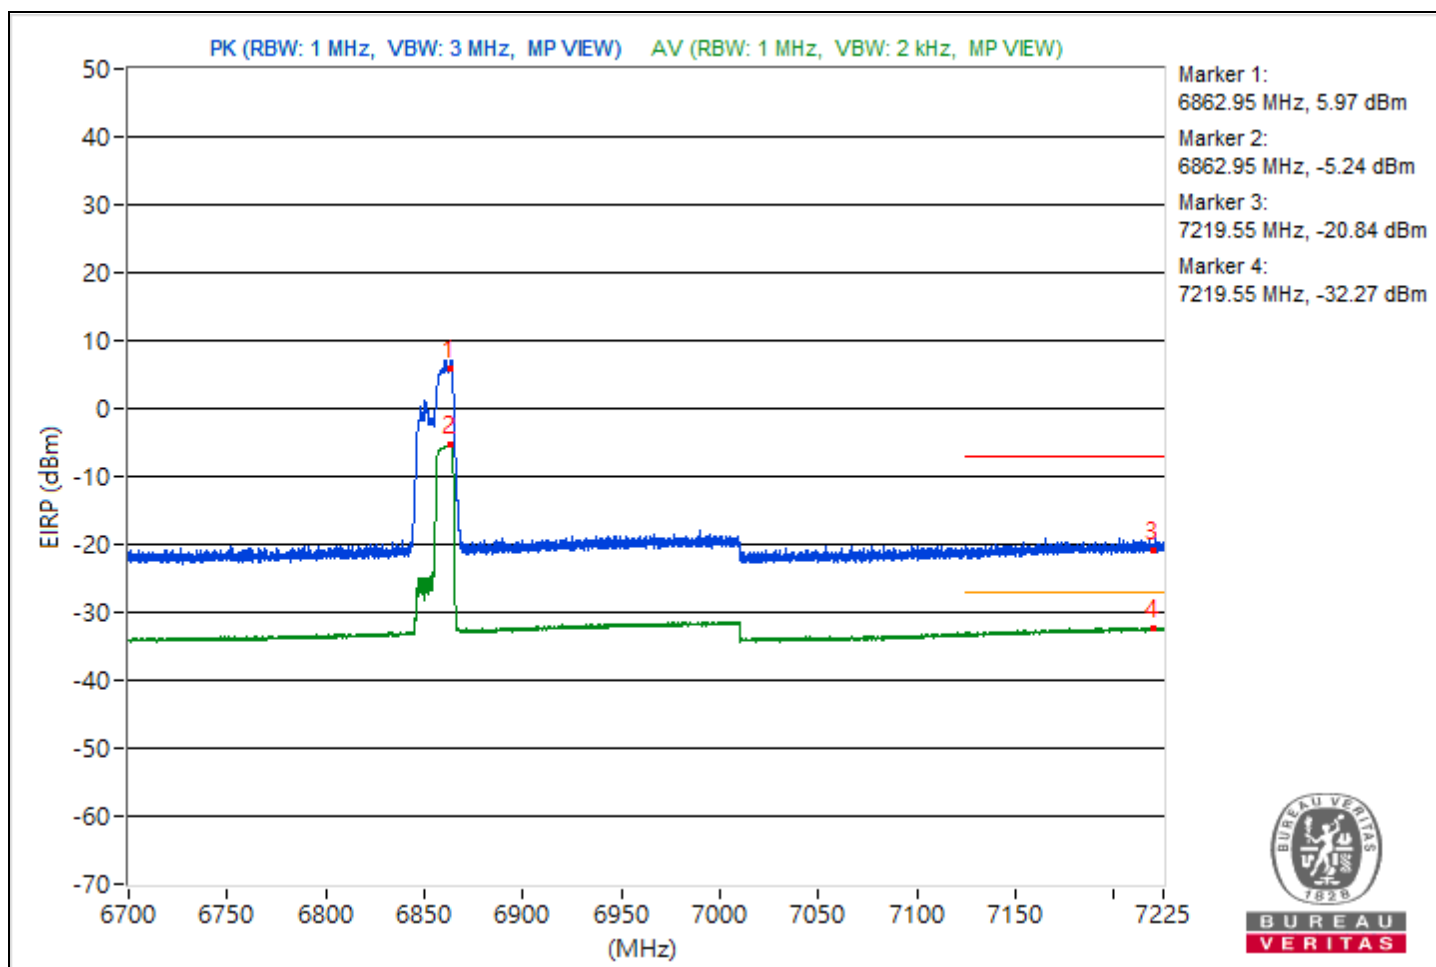

Mode B

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	56.5 PK	74.0	-17.5	1.80 H	250	41.6	14.9
2	11870.00	42.6 AV	54.0	-11.4	1.80 H	250	27.7	14.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	56.7 PK	74.0	-17.3	1.55 V	24	41.8	14.9
2	11870.00	42.7 AV	54.0	-11.3	1.55 V	24	27.8	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	57.0 PK	74.0	-17.0	1.78 H	254	42.1	14.9
2	11910.00	42.9 AV	54.0	-11.1	1.78 H	254	28.0	14.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	57.2 PK	74.0	-16.8	1.50 V	29	42.3	14.9
2	11910.00	43.0 AV	54.0	-11.0	1.50 V	29	28.1	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	56.6 PK	74.0	-17.4	1.85 H	253	41.8	14.8
2	12350.00	42.9 AV	54.0	-11.1	1.85 H	253	28.1	14.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	57.1 PK	74.0	-16.9	1.58 V	25	42.3	14.8
2	12350.00	43.1 AV	54.0	-10.9	1.58 V	25	28.3	14.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	58.5 PK	88.2	-29.7	1.82 H	255	41.8	16.7
2	#12830.00	45.1 AV	68.2	-23.1	1.82 H	255	28.4	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	58.3 PK	88.2	-29.9	1.56 V	33	41.6	16.7
2	#12830.00	44.9 AV	68.2	-23.3	1.56 V	33	28.2	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	58.2 PK	88.2	-30.0	1.87 H	256	40.8	17.4
2	#13070.00	45.4 AV	68.2	-22.8	1.87 H	256	28.0	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	58.4 PK	88.2	-29.8	1.49 V	25	41.0	17.4
2	#13070.00	45.6 AV	68.2	-22.6	1.49 V	25	28.2	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	59.9 PK	74.0	-14.1	1.87 H	255	41.3	18.6
2	13390.00	46.0 AV	54.0	-8.0	1.87 H	255	27.4	18.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	60.1 PK	74.0	-13.9	1.58 V	22	41.5	18.6
2	13390.00	46.2 AV	54.0	-7.8	1.58 V	22	27.6	18.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	60.9 PK	88.2	-27.3	1.85 H	259	41.4	19.5
2	#13710.00	47.1 AV	68.2	-21.1	1.85 H	259	27.6	19.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	61.1 PK	88.2	-27.1	1.54 V	29	41.6	19.5
2	#13710.00	47.3 AV	68.2	-20.9	1.54 V	29	27.8	19.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	56.4 PK	74.0	-17.6	1.86 H	255	41.5	14.9
2	11870.00	42.3 AV	54.0	-11.7	1.86 H	255	27.4	14.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	56.5 PK	74.0	-17.5	1.56 V	22	41.6	14.9
2	11870.00	42.5 AV	54.0	-11.5	1.56 V	22	27.6	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	56.9 PK	74.0	-17.1	1.77 H	255	42.0	14.9
2	11910.00	42.8 AV	54.0	-11.2	1.77 H	255	27.9	14.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	57.0 PK	74.0	-17.0	1.52 V	30	42.1	14.9
2	11910.00	43.0 AV	54.0	-11.0	1.52 V	30	28.1	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	56.5 PK	74.0	-17.5	1.88 H	252	41.7	14.8
2	12350.00	42.8 AV	54.0	-11.2	1.88 H	252	28.0	14.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	56.7 PK	74.0	-17.3	1.46 V	24	41.9	14.8
2	12350.00	43.0 AV	54.0	-11.0	1.46 V	24	28.2	14.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	58.4 PK	88.2	-29.8	1.80 H	256	41.7	16.7
2	#12830.00	45.0 AV	68.2	-23.2	1.80 H	256	28.3	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	58.5 PK	88.2	-29.7	1.50 V	20	41.8	16.7
2	#12830.00	45.2 AV	68.2	-23.0	1.50 V	20	28.5	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	58.3 PK	88.2	-29.9	1.88 H	256	40.9	17.4
2	#13070.00	45.2 AV	68.2	-23.0	1.88 H	256	27.8	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	58.5 PK	88.2	-29.7	1.54 V	27	41.1	17.4
2	#13070.00	45.4 AV	68.2	-22.8	1.54 V	27	28.0	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	60.0 PK	74.0	-14.0	1.88 H	252	41.4	18.6
2	13390.00	46.0 AV	54.0	-8.0	1.88 H	252	27.4	18.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	60.2 PK	74.0	-13.8	1.54 V	28	41.6	18.6
2	13390.00	46.2 AV	54.0	-7.8	1.54 V	28	27.6	18.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	61.0 PK	88.2	-27.2	1.83 H	256	41.5	19.5
2	#13710.00	47.0 AV	68.2	-21.2	1.83 H	256	27.5	19.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	61.1 PK	88.2	-27.1	1.57 V	26	41.6	19.5
2	#13710.00	47.2 AV	68.2	-21.0	1.57 V	26	27.7	19.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	56.5 PK	74.0	-17.5	1.84 H	259	41.6	14.9
2	11930.00	43.2 AV	54.0	-10.8	1.84 H	259	28.3	14.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	56.7 PK	74.0	-17.3	1.52 V	28	41.8	14.9
2	11930.00	43.3 AV	54.0	-10.7	1.52 V	28	28.4	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	56.1 PK	74.0	-17.9	1.87 H	254	41.2	14.9
2	12330.00	42.7 AV	54.0	-11.3	1.87 H	254	27.8	14.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	57.1 PK	74.0	-16.9	1.58 V	29	42.2	14.9
2	12330.00	43.0 AV	54.0	-11.0	1.58 V	29	28.1	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	58.3 PK	88.2	-29.9	1.89 H	256	41.7	16.6
2	#12810.00	44.8 AV	68.2	-23.4	1.89 H	256	28.2	16.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	58.5 PK	88.2	-29.7	1.57 V	24	41.9	16.6
2	#12810.00	44.9 AV	68.2	-23.3	1.57 V	24	28.3	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	58.7 PK	88.2	-29.5	1.85 H	250	41.1	17.6
2	#13130.00	45.2 AV	68.2	-23.0	1.85 H	250	27.6	17.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	58.9 PK	88.2	-29.3	1.50 V	34	41.3	17.6
2	#13130.00	45.4 AV	68.2	-22.8	1.50 V	34	27.8	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	60.4 PK	88.2	-27.8	1.80 H	262	41.6	18.8
2	#13450.00	46.5 AV	68.2	-21.7	1.80 H	262	27.7	18.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	60.6 PK	88.2	-27.6	1.55 V	23	41.8	18.8
2	#13450.00	46.7 AV	68.2	-21.5	1.55 V	23	27.9	18.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	61.1 PK	88.2	-27.1	1.85 H	257	41.6	19.5
2	#13690.00	47.1 AV	68.2	-21.1	1.85 H	257	27.6	19.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	61.3 PK	88.2	-26.9	1.54 V	25	41.8	19.5
2	#13690.00	47.2 AV	68.2	-21.0	1.54 V	25	27.7	19.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	56.1 PK	74.0	-17.9	1.87 H	250	41.3	14.8
2	11970.00	43.2 AV	54.0	-10.8	1.87 H	250	28.4	14.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	56.3 PK	74.0	-17.7	1.57 V	29	41.5	14.8
2	11970.00	43.4 AV	54.0	-10.6	1.57 V	29	28.6	14.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	56.6 PK	74.0	-17.4	1.81 H	256	41.7	14.9
2	12290.00	43.1 AV	54.0	-10.9	1.81 H	256	28.2	14.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	56.7 PK	74.0	-17.3	1.53 V	24	41.8	14.9
2	12290.00	43.2 AV	54.0	-10.8	1.53 V	24	28.3	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	58.7 PK	88.2	-29.5	1.87 H	258	42.2	16.5
2	#12770.00	44.7 AV	68.2	-23.5	1.87 H	258	28.2	16.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	58.8 PK	88.2	-29.4	1.58 V	22	42.3	16.5
2	#12770.00	44.8 AV	68.2	-23.4	1.58 V	22	28.3	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	59.3 PK	74.0	-14.7	1.80 H	257	41.1	18.2
2	13250.00	45.8 AV	54.0	-8.2	1.80 H	257	27.6	18.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13250.00	59.5 PK	74.0	-14.5	1.54 V	25	41.3	18.2
2	13250.00	45.9 AV	54.0	-8.1	1.54 V	25	27.7	18.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	60.4 PK	88.2	-27.8	1.88 H	257	41.8	18.6
2	#13410.00	46.2 AV	68.2	-22.0	1.88 H	257	27.6	18.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	60.5 PK	88.2	-27.7	1.55 V	29	41.9	18.6
2	#13410.00	46.4 AV	68.2	-21.8	1.55 V	29	27.8	18.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	60.0 PK	88.2	-28.2	1.83 H	258	40.9	19.1
2	#13570.00	46.6 AV	68.2	-21.6	1.83 H	258	27.5	19.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13570.00	60.4 PK	88.2	-27.8	1.52 V	35	41.3	19.1
2	#13570.00	46.7 AV	68.2	-21.5	1.52 V	35	27.6	19.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	56.7 PK	74.0	-17.3	1.84 H	254	41.6	15.1
2	12050.00	43.1 AV	54.0	-10.9	1.84 H	254	28.0	15.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	56.9 PK	74.0	-17.1	1.59 V	25	41.8	15.1
2	12050.00	43.3 AV	54.0	-10.7	1.59 V	25	28.2	15.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	56.5 PK	74.0	-17.5	1.87 H	250	41.7	14.8
2	12370.00	42.5 AV	54.0	-11.5	1.87 H	250	27.7	14.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	56.6 PK	74.0	-17.4	1.55 V	23	41.8	14.8
2	12370.00	42.6 AV	54.0	-11.4	1.55 V	23	27.8	14.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	57.6 PK	74.0	-16.4	1.78 H	255	41.5	16.1
2	12690.00	43.6 AV	54.0	-10.4	1.78 H	255	27.5	16.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	57.8 PK	74.0	-16.2	1.55 V	26	41.7	16.1
2	12690.00	43.7 AV	54.0	-10.3	1.55 V	26	27.6	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	59.5 PK	74.0	-14.5	1.80 H	259	40.9	18.6
2	13330.00	46.2 AV	54.0	-7.8	1.80 H	259	27.6	18.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	60.1 PK	74.0	-13.9	1.50 V	29	41.5	18.6
2	13330.00	46.4 AV	54.0	-7.6	1.50 V	29	27.8	18.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	56.3 PK	74.0	-17.7	1.84 H	245	41.4	14.9
2	11870.00	41.8 AV	54.0	-12.2	1.84 H	245	26.9	14.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	56.5 PK	74.0	-17.5	1.54 V	22	41.6	14.9
2	11870.00	42.4 AV	54.0	-11.6	1.54 V	22	27.5	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	57.1 PK	74.0	-16.9	1.78 H	255	42.2	14.9
2	11910.00	43.2 AV	54.0	-10.8	1.78 H	255	28.3	14.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	57.2 PK	74.0	-16.8	1.56 V	25	42.3	14.9
2	11910.00	43.3 AV	54.0	-10.7	1.56 V	25	28.4	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	56.6 PK	74.0	-17.4	1.85 H	255	41.8	14.8
2	12350.00	43.1 AV	54.0	-10.9	1.85 H	255	28.3	14.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	56.9 PK	74.0	-17.1	1.57 V	25	42.1	14.8
2	12350.00	43.3 AV	54.0	-10.7	1.57 V	25	28.5	14.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	58.4 PK	88.2	-29.8	1.85 H	257	41.7	16.7
2	#12830.00	44.9 AV	68.2	-23.3	1.85 H	257	28.2	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	58.6 PK	88.2	-29.6	1.58 V	29	41.9	16.7
2	#12830.00	45.1 AV	68.2	-23.1	1.58 V	29	28.4	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	58.3 PK	88.2	-29.9	1.88 H	254	40.9	17.4
2	#13070.00	45.6 AV	68.2	-22.6	1.88 H	254	28.2	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	58.5 PK	88.2	-29.7	1.55 V	28	41.1	17.4
2	#13070.00	45.7 AV	68.2	-22.5	1.55 V	28	28.3	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	59.4 PK	74.0	-14.6	1.80 H	255	40.8	18.6
2	13390.00	46.1 AV	54.0	-7.9	1.80 H	255	27.5	18.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	59.5 PK	74.0	-14.5	1.54 V	24	40.9	18.6
2	13390.00	46.2 AV	54.0	-7.8	1.54 V	24	27.6	18.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	60.8 PK	88.2	-27.4	1.85 H	257	41.3	19.5
2	#13710.00	46.9 AV	68.2	-21.3	1.85 H	257	27.4	19.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	61.0 PK	88.2	-27.2	1.59 V	28	41.5	19.5
2	#13710.00	47.1 AV	68.2	-21.1	1.59 V	28	27.6	19.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	56.4 PK	74.0	-17.6	1.85 H	252	41.5	14.9
2	11870.00	42.0 AV	54.0	-12.0	1.85 H	252	27.1	14.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	56.5 PK	74.0	-17.5	1.56 V	23	41.6	14.9
2	11870.00	42.3 AV	54.0	-11.7	1.56 V	23	27.4	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	56.9 PK	74.0	-17.1	1.84 H	253	42.0	14.9
2	11910.00	43.1 AV	54.0	-10.9	1.84 H	253	28.2	14.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	57.0 PK	74.0	-17.0	1.50 V	28	42.1	14.9
2	11910.00	43.2 AV	54.0	-10.8	1.50 V	28	28.3	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	56.7 PK	74.0	-17.3	1.80 H	258	41.9	14.8
2	12350.00	43.1 AV	54.0	-10.9	1.80 H	258	28.3	14.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	57.0 PK	74.0	-17.0	1.57 V	28	42.2	14.8
2	12350.00	43.4 AV	54.0	-10.6	1.57 V	28	28.6	14.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	58.6 PK	88.2	-29.6	1.87 H	251	41.9	16.7
2	#12830.00	44.9 AV	68.2	-23.3	1.87 H	251	28.2	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	58.7 PK	88.2	-29.5	1.50 V	29	42.0	16.7
2	#12830.00	45.2 AV	68.2	-23.0	1.50 V	29	28.5	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	58.4 PK	88.2	-29.8	1.82 H	260	41.0	17.4
2	#13070.00	45.5 AV	68.2	-22.7	1.82 H	260	28.1	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	58.6 PK	88.2	-29.6	1.50 V	25	41.2	17.4
2	#13070.00	45.6 AV	68.2	-22.6	1.50 V	25	28.2	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	59.4 PK	74.0	-14.6	1.84 H	255	40.8	18.6
2	13390.00	46.0 AV	54.0	-8.0	1.84 H	255	27.4	18.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	59.6 PK	74.0	-14.4	1.55 V	28	41.0	18.6
2	13390.00	46.2 AV	54.0	-7.8	1.54 V	24	27.6	18.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	60.9 PK	88.2	-27.3	1.80 H	248	41.4	19.5
2	#13710.00	46.9 AV	68.2	-21.3	1.80 H	248	27.4	19.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	61.1 PK	88.2	-27.1	1.56 V	24	41.6	19.5
2	#13710.00	47.1 AV	68.2	-21.1	1.56 V	24	27.6	19.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	56.3 PK	74.0	-17.7	1.88 H	250	41.4	14.9
2	11870.00	42.1 AV	54.0	-11.9	1.88 H	250	27.2	14.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	56.4 PK	74.0	-17.6	1.55 V	26	41.5	14.9
2	11870.00	42.4 AV	54.0	-11.6	1.55 V	26	27.5	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	57.0 PK	74.0	-17.0	1.87 H	255	42.1	14.9
2	11910.00	43.2 AV	54.0	-10.8	1.87 H	255	28.3	14.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	57.2 PK	74.0	-16.8	1.54 V	22	42.3	14.9
2	11910.00	43.3 AV	54.0	-10.7	1.54 V	22	28.4	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	56.5 PK	74.0	-17.5	1.81 H	256	41.7	14.8
2	12350.00	42.9 AV	54.0	-11.1	1.81 H	256	28.1	14.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	56.7 PK	74.0	-17.3	1.57 V	27	41.9	14.8
2	12350.00	43.1 AV	54.0	-10.9	1.57 V	27	28.3	14.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	58.5 PK	88.2	-29.7	1.85 H	258	41.8	16.7
2	#12830.00	44.8 AV	68.2	-23.4	1.85 H	258	28.1	16.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	58.7 PK	88.2	-29.5	1.54 V	21	42.0	16.7
2	#12830.00	45.0 AV	68.2	-23.2	1.54 V	21	28.3	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	58.2 PK	88.2	-30.0	1.88 H	254	40.8	17.4
2	#13070.00	45.4 AV	68.2	-22.8	1.88 H	254	28.0	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	58.4 PK	88.2	-29.8	1.51 V	27	41.0	17.4
2	#13070.00	45.6 AV	68.2	-22.6	1.51 V	27	28.2	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	59.3 PK	74.0	-14.7	1.87 H	255	40.7	18.6
2	13390.00	45.9 AV	54.0	-8.1	1.87 H	255	27.3	18.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	59.6 PK	74.0	-14.4	1.56 V	29	41.0	18.6
2	13390.00	46.1 AV	54.0	-7.9	1.56 V	29	27.5	18.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 73.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	60.7 PK	88.2	-27.5	1.79 H	252	41.2	19.5
2	#13710.00	46.8 AV	68.2	-21.4	1.79 H	252	27.3	19.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	60.9 PK	88.2	-27.3	1.59 V	25	41.4	19.5
2	#13710.00	47.0 AV	68.2	-21.2	1.59 V	25	27.5	19.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

Mode C

RF Mode	802.11ax (HE20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	19.8 °C, 76.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.2 PK	88.2	-15.0	1.30 H	22	67.1	6.1
2	#5925.00	63.3 AV	68.2	-4.9	1.30 H	22	57.2	6.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.0 PK	88.2	-10.2	2.95 V	243	71.9	6.1
2	#5925.00	67.6 AV	68.2	-0.6	2.95 V	243	61.5	6.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	19.8 °C, 76.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.8 PK	88.2	-12.4	1.21 H	22	69.7	6.1
2	#5925.00	63.2 AV	68.2	-5.0	1.21 H	22	57.1	6.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.2 PK	88.2	-9.0	3.26 V	237	73.1	6.1
2	#5925.00	66.4 AV	68.2	-1.8	3.26 V	237	60.3	6.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	19.8 °C, 76.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.1 PK	88.2	-13.1	1.21 H	22	69.0	6.1
2	#5925.00	63.3 AV	68.2	-4.9	1.21 H	22	57.2	6.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.6 PK	88.2	-7.6	2.79 V	239	74.5	6.1
2	#5925.00	67.2 AV	68.2	-1.0	2.79 V	239	61.1	6.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	19.8 °C, 76.8 % RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.5 PK	88.2	-13.7	1.20 H	22	68.4	6.1
2	#5925.00	64.4 AV	68.2	-3.8	1.20 H	22	58.3	6.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.0 PK	88.2	-8.2	2.80 V	238	73.9	6.1
2	#5925.00	68.0 AV	68.2	-0.2	2.80 V	238	61.9	6.1


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.


Mode C Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11ax (HE20) Channel 2

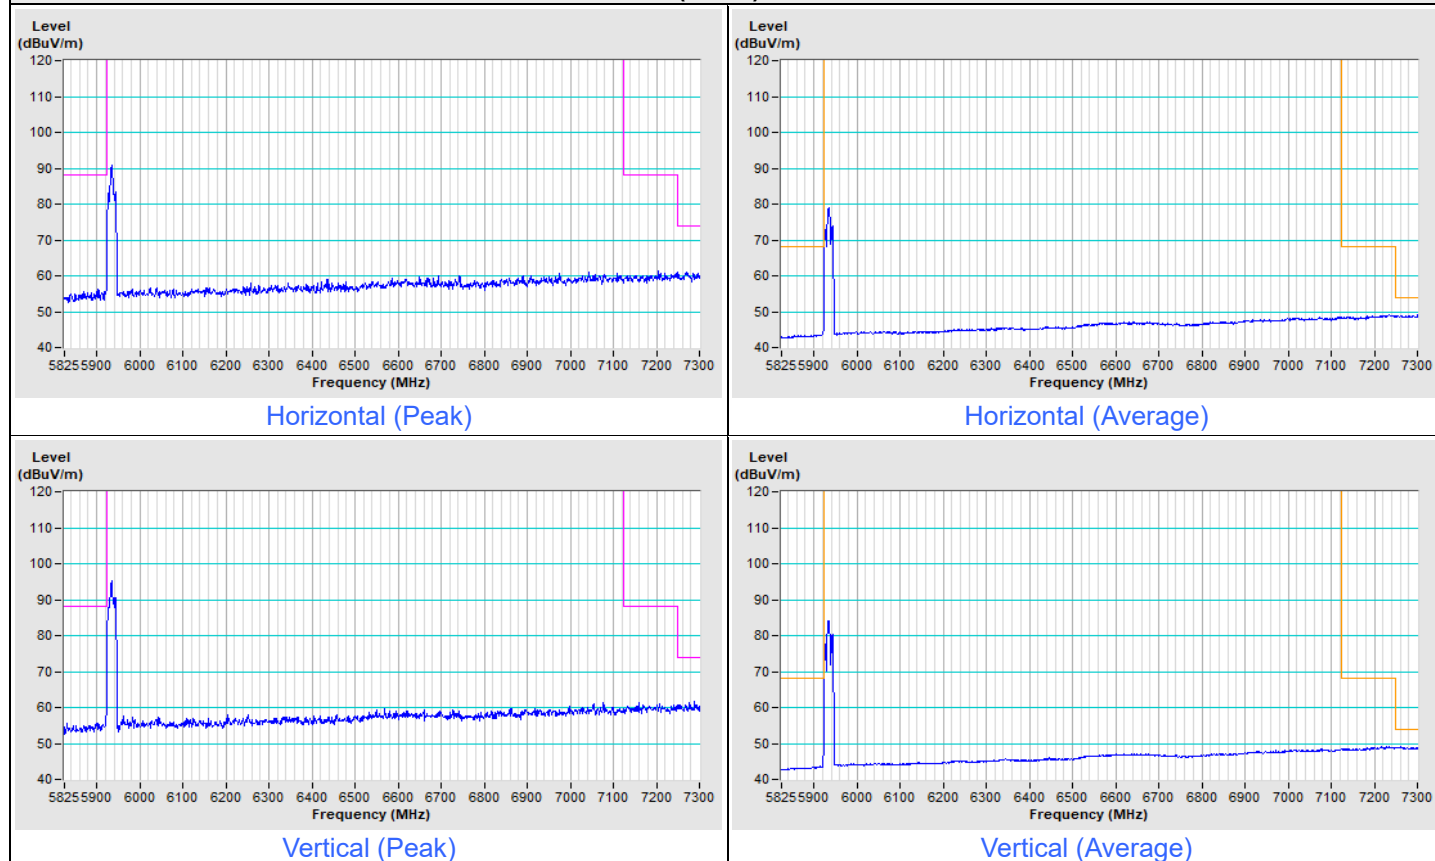


802.11ax (HE20) 26-tone RU Channel 2

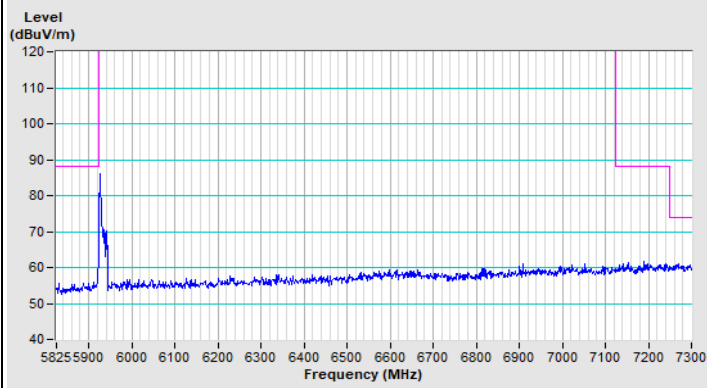


Horizontal (Peak)

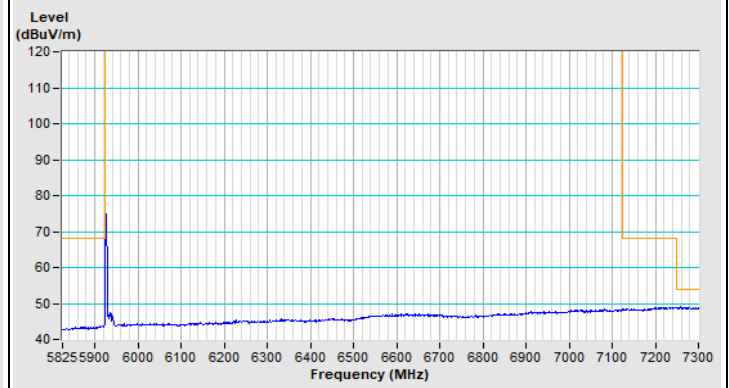

Horizontal (Average)

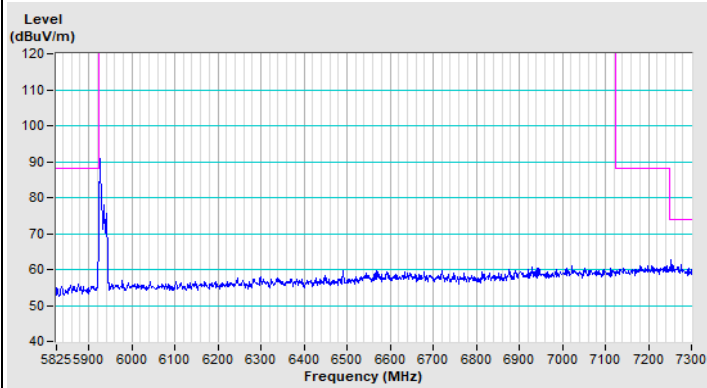


Vertical (Peak)

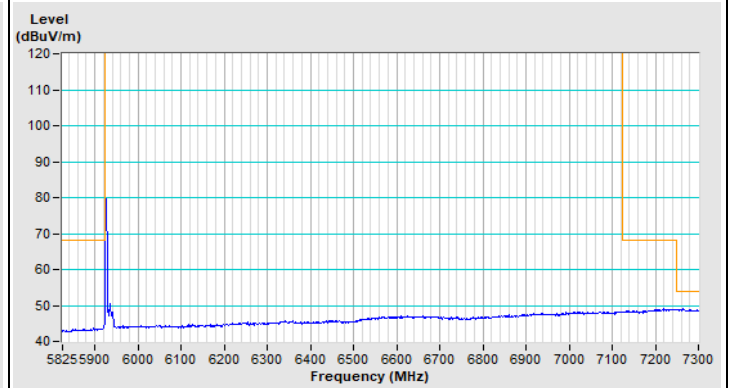


Vertical (Average)


802.11ax (HE20) 52-tone RU Channel 2

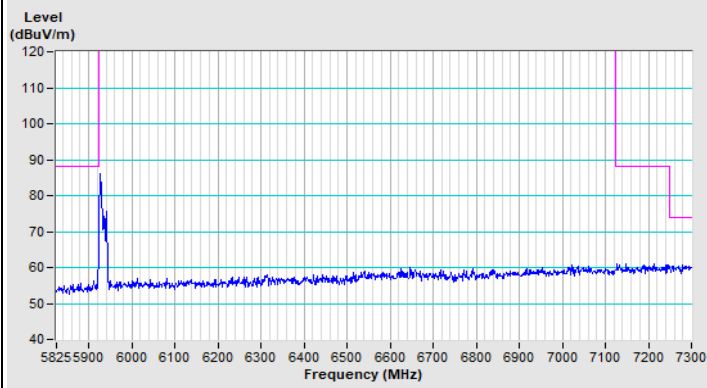


Horizontal (Peak)

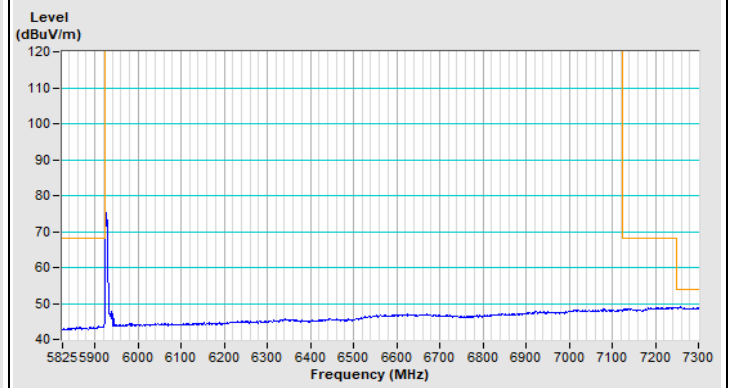

Horizontal (Average)

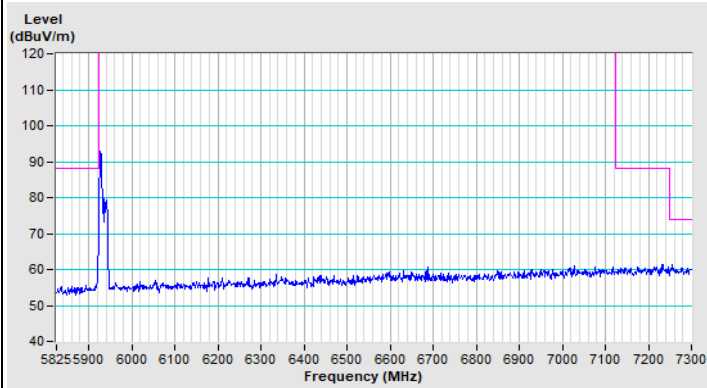


Vertical (Peak)

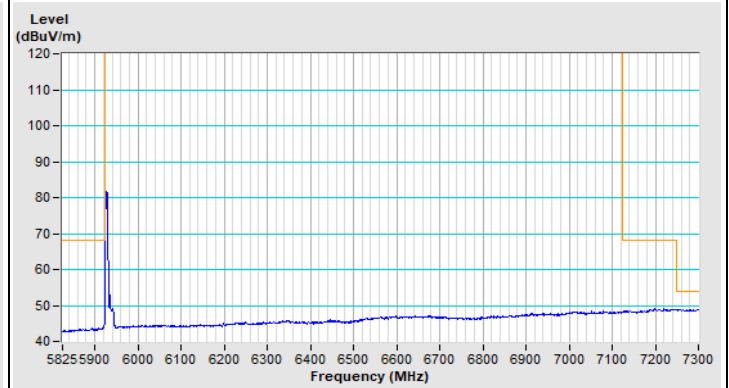


Vertical (Average)


802.11ax (HE20) 106-tone RU Channel 2

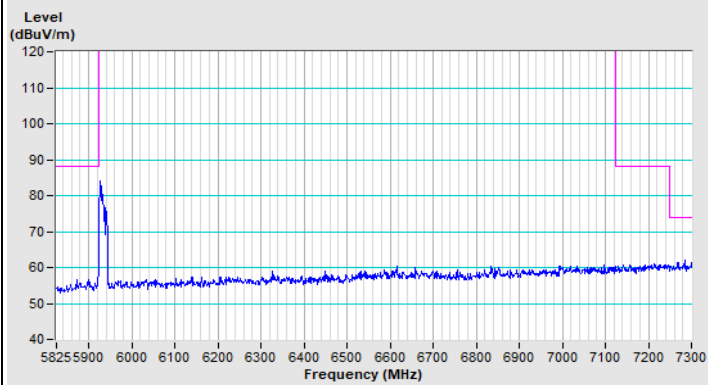


Horizontal (Peak)

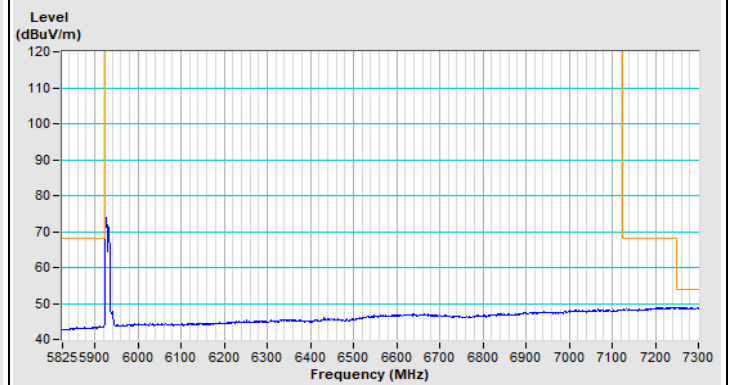

Horizontal (Average)

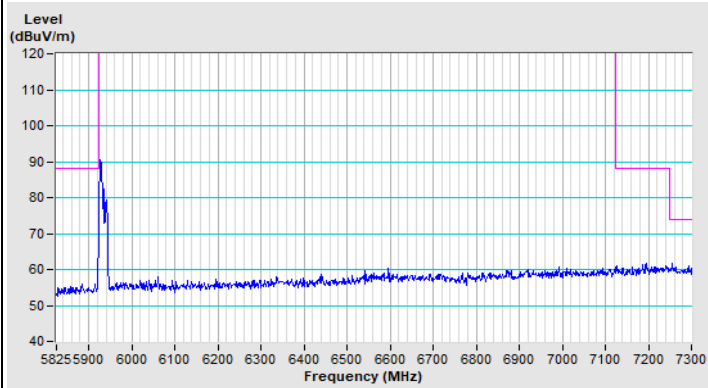

Vertical (Peak)

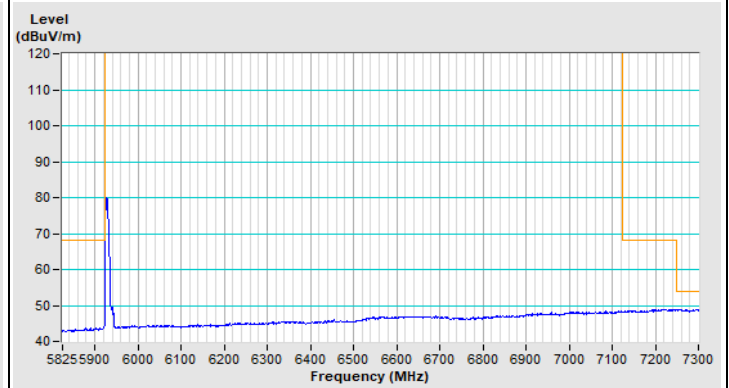

Vertical (Average)

Mode D

RF Mode	802.11ax (HE20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.2 PK	88.2	-10.0	3.67 H	156	72.1	6.1
2	#5925.00	66.5 AV	68.2	-1.7	3.67 H	156	60.4	6.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.2 PK	88.2	-15.0	3.83 V	181	67.1	6.1
2	#5925.00	63.5 AV	68.2	-4.7	3.83 V	181	57.4	6.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.1 PK	88.2	-9.1	3.59 H	142	73.0	6.1
2	#5925.00	66.2 AV	68.2	-2.0	3.59 H	142	60.1	6.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.6 PK	88.2	-10.6	3.80 V	177	71.5	6.1
2	#5925.00	65.6 AV	68.2	-2.6	3.80 V	177	59.5	6.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.4 PK	88.2	-8.8	3.87 H	144	73.3	6.1
2	#5925.00	66.9 AV	68.2	-1.3	3.87 H	144	60.8	6.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.2 PK	88.2	-13.0	3.91 V	190	69.1	6.1
2	#5925.00	64.1 AV	68.2	-4.1	3.91 V	190	58.0	6.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.5 PK	88.2	-10.7	3.85 H	144	71.4	6.1
2	#5925.00	66.8 AV	68.2	-1.4	3.85 H	144	60.7	6.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.5 PK	88.2	-12.7	3.76 V	179	69.4	6.1
2	#5925.00	65.5 AV	68.2	-2.7	3.76 V	179	59.4	6.1


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.


Mode D Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11ax (HE20) Channel 2

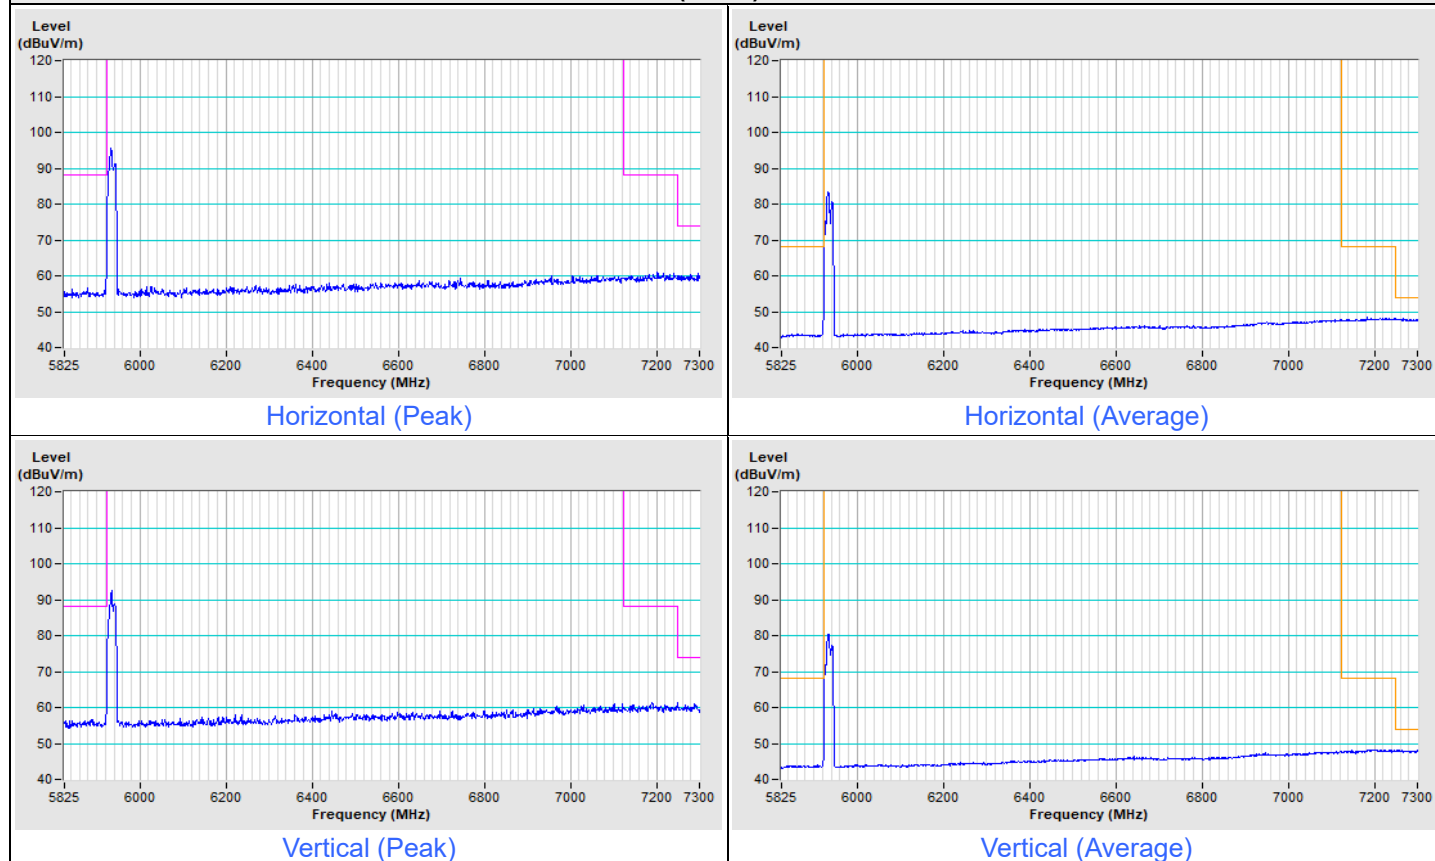


802.11ax (HE20) 26-tone RU Channel 2

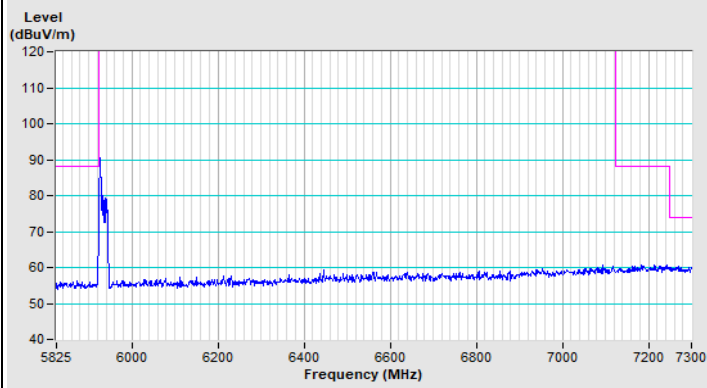


Horizontal (Peak)

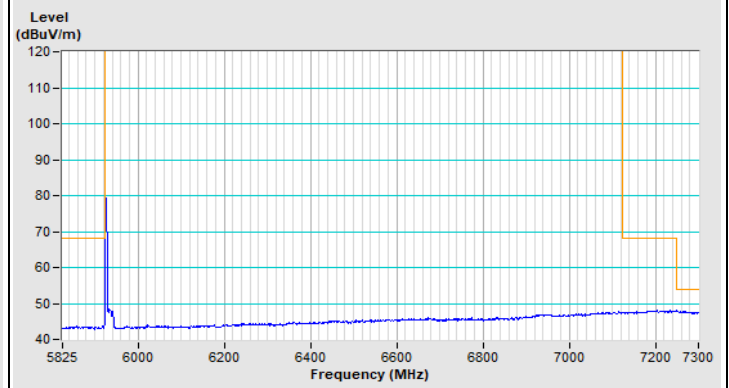

Horizontal (Average)

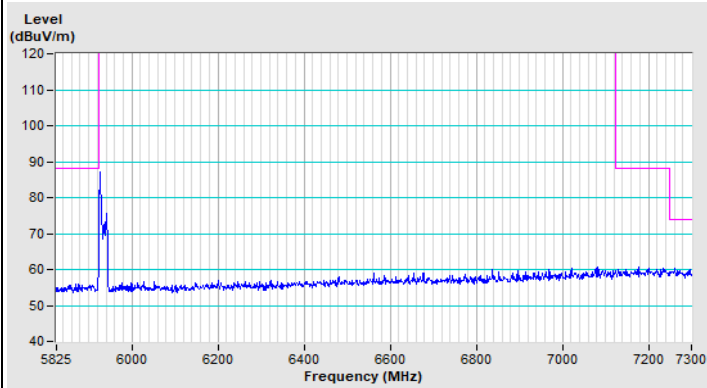


Vertical (Peak)

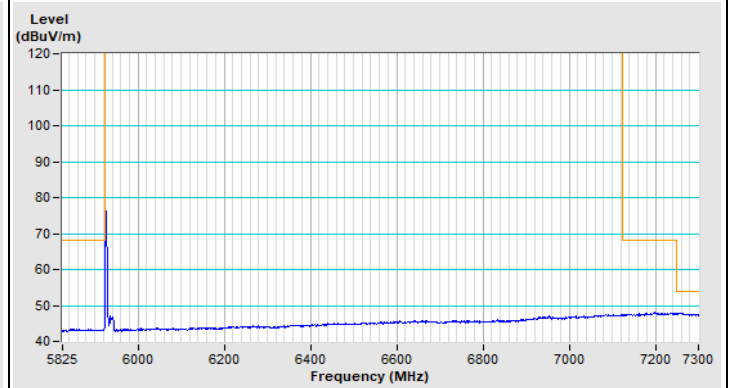


Vertical (Average)


802.11ax (HE20) 52-tone RU Channel 2

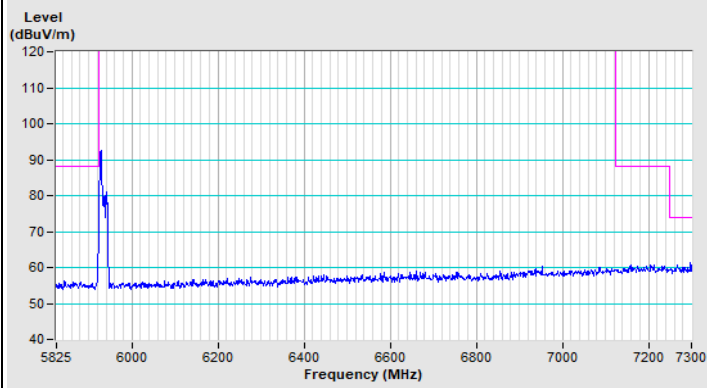


Horizontal (Peak)

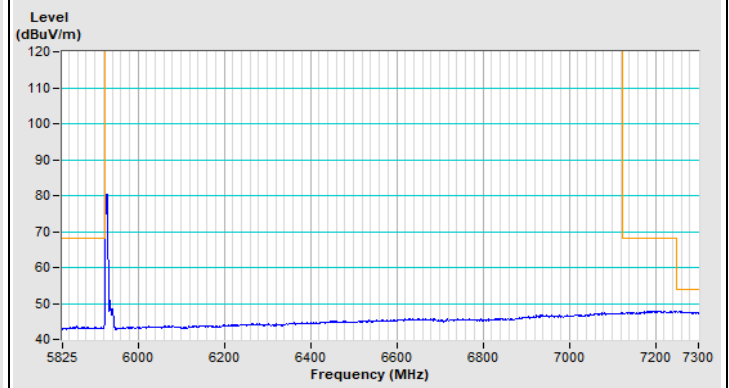

Horizontal (Average)

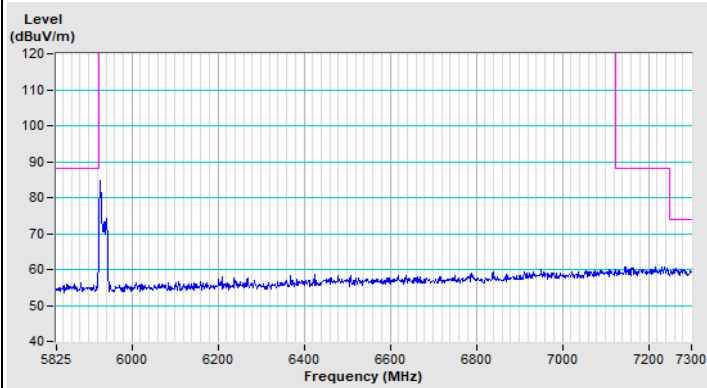


Vertical (Peak)

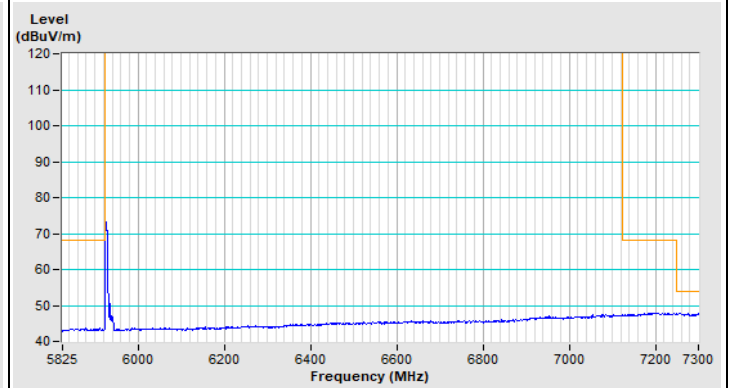


Vertical (Average)


802.11ax (HE20) 106-tone RU Channel 2

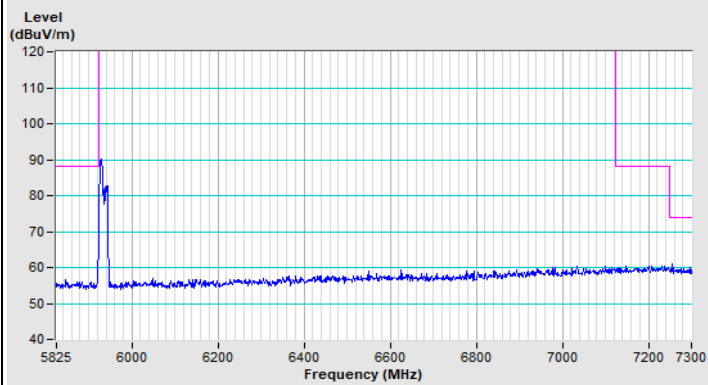


Horizontal (Peak)

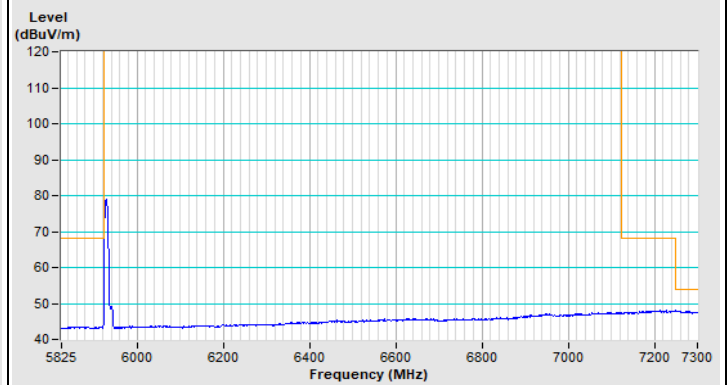

Horizontal (Average)

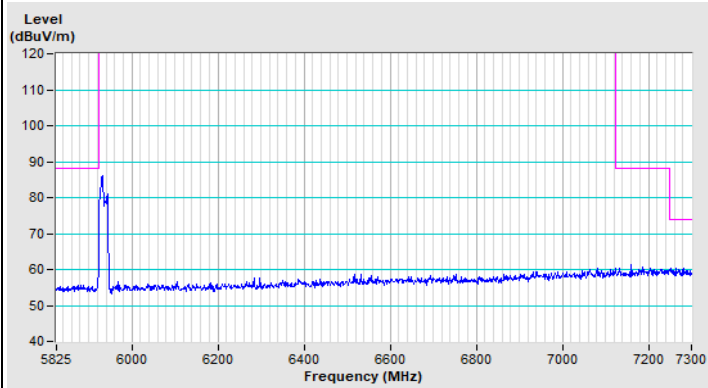

Vertical (Peak)

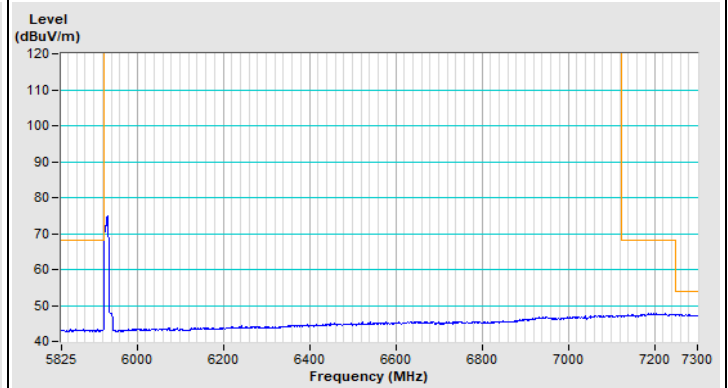

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---