

APPLICATION		REVISION				
NEXT ASSY	PROJECT NO.	ECN NO.	REV	DESCRIPTION	DATE	APPROVED
	13551	---	A	PRODUCTION RELEASE	03/21/08	C. MOORE

REFERENCE DOCUMENTS

109893 "Specification, Supplier Packaging/Material Handling."
 137124 "Specification, Label Orientation and Liner Format."
 453669 "Specification, Cosmetic Requirements."
 HX-00011-00 "General Specification for the Environment."
 CSA "List of Accepted Adhesive Type Name Plates." Canadian Standards Association
 UL 969 "Standard for Safety of Marking and Labeling Systems." Underwriters Laboratories, Inc. (U.L.)

REQUIREMENTS

MATERIAL

- **FACESTOCK:** Low-gloss, white, polyester film suitable for thermal transfer printing. Will caliper to 0.0025 ±.0005. Approved example: Worldmark Info-mark 336T-E1 white polyester matte finish.
- **ADHESIVE:** Worldmark Donprint E1, or equivalent, permanent high performance adhesive 0.001" [0.025mm] thick). Suitable for bonding to a sheet metal, aluminum, or textured polycarbonate/ABS blend surface. Minimum service temperature range shall be -20°C to +80°C.
- **LINER:** Low opacity, white glassine, 0.003" [0.075mm] thick.
- **RIBBON:** Worldmark DMR 750-60-450Z resin ribbon, or equivalent. Black ink for matte surfaces.

NOTES:

1. Compliance to the latest revision of Hewlett-Packard General Specification for the Environment (GSE Document number HX-00011-00), including the RoHS Compliance Specification in the GSE, is required. <http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf>
2. Alternate material (facestock, adhesive, overlaminates or liner) must be pre-approved for production compatibility by Procurement and/or Product Engineering Groups.

COSMETIC REQUIREMENTS

The label will conform to document 453669 as a Class II label.

AGENCY REQUIREMENTS

UL Recognized Component Marking and Labeling System (PGDQ2 or PGJI2)
 Canadian Standards Association (CSA) Approved Manufacturer of Accepted Adhesive Type Name Plates (CSA Identifier will appear on the label.)

SHIPPING AND QUALITY REQUIREMENTS


Refer to document 109893 and 137124.

ARTWORK AVAILABILITY

Electronic artwork files are controlled by and available from the ODM.

HP RESTRICTED	APPROVALS		DATE		LBL, NB UNIT WWAN UNDP REGULATORY
	DRAWN	C. MOORE			
THIS DOCUMENT AND ANY ASSOCIATED DATA CONTAIN RESTRICTED INFORMATION THAT IS HEWLETT-PACKARD (HP) PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY HP.	CHECKED	J. LINDSEY	XX/XX/08		
	DSGN ENGR	P. STOUT	XX/XX/08		
	ENG	C. MOORE	XX/XX/08		
	ENG				
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [MILLIMETERS]. TOLERANCES ARE:	QA				
FRACTIONS DECIMALS ANGLES ±1/32 .XX ±.02 [0.5] ±1° .XXX ±.010 [0.25]	LEGAL			SIZE A	DRAWING NO. 495313
	AGENCY	R. BLAKE	XX/XX/08		
	DO NOT SCALE DRAWING				
	SUPPLEMENTS: EF, EF-PDF			SHEET	1 OF 2

TYPICAL -001/00A LABEL

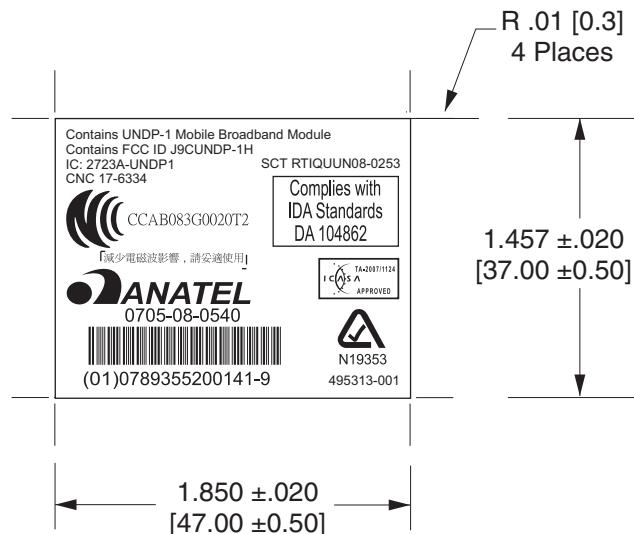

NOTES:

1. The ATick should be a minimum of 3mm high and the associated supplier code (N19353 should be a minimum of 1mm high).
2. Everything else should be “readable”.
3. Print 2 labels - one to be affixed onto the bottom of the unit; the other will be affixed onto the top visible flap of the box.
4. Barcode: Code 128.
5. Barcode Height: 5.0mm
6. Font: Arial 5 pt.

 invent	SIZE A	DRAWING NO.		REV A
		495313		
	DRAWN:	C.M.	SCALE 1/1	SHEET 2 OF 2