

FCC PART 15, SUBPART C
TEST METHOD: ANSI C63.4-1992

for

WIRELESS DOORBELL
TRANSMITTER

Model: DC-28

Prepared for

ABOL ELECTRONIC PRODUCTS, LTD.
BK. C, 5/F, SUPREME IND. BLDG.
15-17 SHAN MEI STREET, FO TAN
SHATIN, N.T., HONG KONG

COMPATIBLE ELECTRONICS INC.
114 OLINDA DRIVE
BREA, CALIFORNIA 92823
(714) 579-0500

DATE: JUNE 14, 1999

	REPORT BODY	APPENDICES				TOTAL
		A	B	C	D	
PAGES	15	2	2	15	8	42

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	4
1. PURPOSE	5
2. ADMINISTRATIVE DATA	6
2.1 Location of Testing	6
2.2 Traceability Statement	6
2.3 Cognizant Personnel	6
2.4 Date Test Sample was Received	6
2.5 Disposition of the Test Sample	6
2.6 Abbreviations and Acronyms	6
3. APPLICABLE DOCUMENTS	7
4. Description of Test Configuration	8
4.1 Description of Test Configuration - EMI	8
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
5.1 EUT and Accessory List	10
5.2 EMI Test Equipment	11
6. TEST SITE DESCRIPTION	12
6.1 Test Facility Description	12
6.2 EUT Mounting, Bonding and Grounding	12
7. Test Procedures	13
7.1 Radiated Emissions (Spurious and Harmonics) Test	13
7.2 Bandwidth of the Fundamental	14
8. CONCLUSIONS	15



LIST OF APPENDICES

APPENDIX	TITLE
A	Modification to the EUT
B	Additional Models Covered Under This Report
C	Diagrams, Charts and Photos • Test Setup Diagrams • Radiated Emissions Photos • Antenna and Effective Gain Factors
D	Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Conducted Emissions Test Setup
2	Plot Map And Layout of Test Site



GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full with the written permission of Compatible Electronics.

This report must not be used to claim product endorsement by NVLAP or any other agency of the U.S. Government.

Device Tested: Wireless Doorbell Transmitter
Model: DC-28
S/N: N/A

Product Description: See Expository Statement.

Modifications: The EUT was not modified during the testing.

Manufacturer: Abol Electronic Products, Ltd.
Bk. C, 5/F, Supreme Ind. Bldg. 15-17 Shan Mei Street
Fo Tan, Shatin, N.T., Hong Kong

Test Date: June 10, 1999


Test Specifications: EMI requirements
FCC Title 47, Part 15 Subpart C, Sections 15.205 and 15.231

Test Procedure: ANSI C63.4: 1992

Test Deviations: The test procedure was not deviated from during the testing.

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 450 kHz - 30 MHz	This test was not performed because the EUT runs off one 12V battery only and cannot be powered by any device that runs off of the AC public mains.
2	Radiated RF Emissions, 10 kHz - 4200 MHz	Complies with the of FCC Title 47, Part 15 Subpart C, sections 15.205 and 15.231



1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Wireless Doorbell Transmitter Model: DC-28. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4: 1992. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the specification limits defined by FCC Title 47, Part 15, Subpart C, sections 15.205, and 15.231.



2. ADMINISTRATIVE DATA

2.1 Location of Testing

The EMI tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Abol Electronic Products, Ltd.

Pak-Wan Pong Engineer

Compatible Electronics Inc.

Michael Christensen Test Engineer

Scott McCutchan Lab Manager

2.4 Date Test Sample was Received

The test sample was received on June 3, 1999

2.5 Disposition of the Test Sample

The test sample has not yet been returned to Abol Electronic Products, Ltd.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network



3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMI Test Report.

SPEC	TITLE
FCC Title 47, Subpart C.	FCC Rules - Radio frequency devices (including digital devices) – Intentional Radiators.
ANSI C63.4 1992	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz.



4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration - EMI

Setup and operation of the equipment under test.

Specifics of the EUT and Peripherals Tested

The Wireless Doorbell Transmitter Model: DC-28 (EUT) was tested as a stand alone unit and tested in three different orthogonal axis. The EUT was continuously transmitting during the test. The antenna is a PCB trace. The EUT turns off immediately after the button is released.

Final radiated data was taken in the mode above.



4.1.1 Cable Construction and Termination

There were no cables attached to the EUT



5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT

5.1 EUT and Accessory List

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID
WIRELESS DOORBELL TRANSMITTER (EUT)	ABOL ELECTRONIC PRODUCTS, LTD.	DC-28	N/A	JB3DC-2028-



5.2 EMI Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
Spectrum Analyzer	Hewlett Packard	8566B	3638A08768	Dec. 11, 1998	Dec. 11, 1999
Preamplifier	Com Power	PA-102	1400	July 27, 1998	July 27, 1999
Quasi-Peak Adapter	Hewlett Packard	85650A	3303A01688	June 23, 1998	June 23, 1999
Biconical Antenna	Com Power	AB-100	1543	Oct. 15, 1998	Oct. 15, 1999
Log Periodic Antenna	Com Power	AL-100	1011	Oct. 15, 1998	Oct. 15, 1999
Antenna Mast	Com Power	AM-100	N/A	N/A	N/A
Turntable	Com Power	TT-100	N/A	N/A	N/A
Plotter	Hewlett Packard	7440A	8726K38417	N/A	N/A
Microwave Preamplifier	Hewlett Packard	8449B	3008A008766	Jan. 30, 1999	Jan. 30, 2000
Horn Antenna	Antenna Research	DRG-118/A	1053	Dec. 8, 1995	N/A
Loop Antenna	Com-Power	AL-130	25309	Feb. 5, 1999	Feb. 5, 2000



6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 and 7.1 of this report for EMI test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was not grounded.



7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

7.1 Radiated Emissions (Spurious and Harmonics) Test

The spectrum analyzer was used as a measuring meter along with the quasi-peak adapter. Amplifiers were used to increase the sensitivity of the instrument. The Com Power Preamplifier Model: PA-102 was used for frequencies from 30 MHz to 1 GHz, and the Hewlett Packard Microwave Preamplifier Model: 8449B was used for frequencies above 1 GHz. The spectrum analyzer was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the spectrum analyzer records the highest measured reading over all the sweeps. The quasi-peak adapter was used only for those readings which are marked accordingly on the data sheets. The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
10 kHz to 150 kHz	200 Hz	Active Loop Antenna
150 kHz to 30 MHz	9 kHz	Active Loop Antenna
30 MHz to 300 MHz	120 kHz	Biconical Antenna
300 MHz to 1 GHz	120 kHz	Log Periodic Antenna
1 GHz to 3.5 GHz	1 MHz	Horn Antenna

The open field test site of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4: 1992. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results.

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a 3 meter test distance to obtain final test data.

7.2 Bandwidth of the Fundamental



The -20 dB bandwidth was checked to see that it was within 0.25% of the fundamental frequency for the transmitter. A plot of the -20 dB bandwidth is in Appendix D.



8. CONCLUSIONS

The Wireless Doorbell Transmitter Model: DC-28 meets all of the specification limits defined in FCC Title 47, Part 15, Subpart C, sections 15.205 and 15.231.





MODIFICATION TO THE EUT



MODIFICATION TO THE EUT

The modification listed below was made to the EUT to pass FCC 15.231 specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

Modification:

- 1) Tuned capacitor C5 to 303 MHz.





APPENDIX B

***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***



ADDITIONAL MODELS COVERED UNDER THIS REPORT


USED FOR THE PRIMARY TEST


Wireless Doorbell Transmitter

Model: DC-28

S/N: N/A

There were no additional models covered under this report.

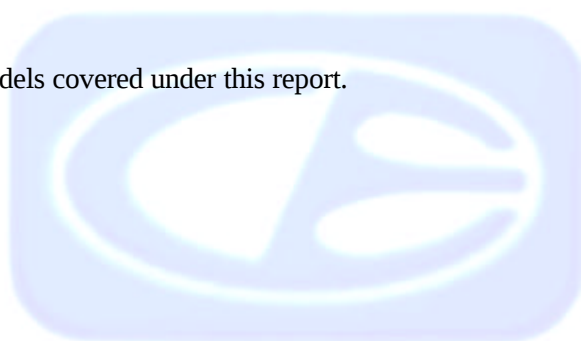

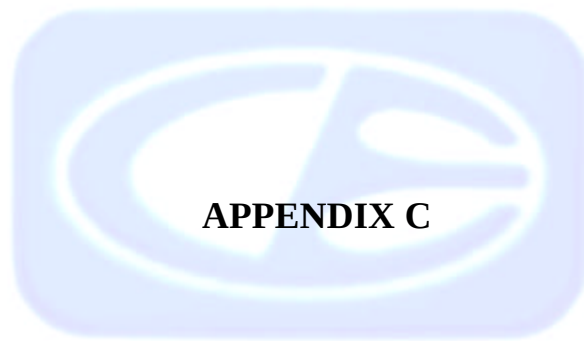

APPENDIX C

DIAGRAMS, CHARTS AND PHOTOS





FRONT VIEW


ABOL ELECTRONIC PRODUCTS, LTD.
WIRELESS DOORBELL TRANSMITTER

Model: DC-28

FCC SUBPART C - RADIATED EMISSIONS – 6-10-99

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**




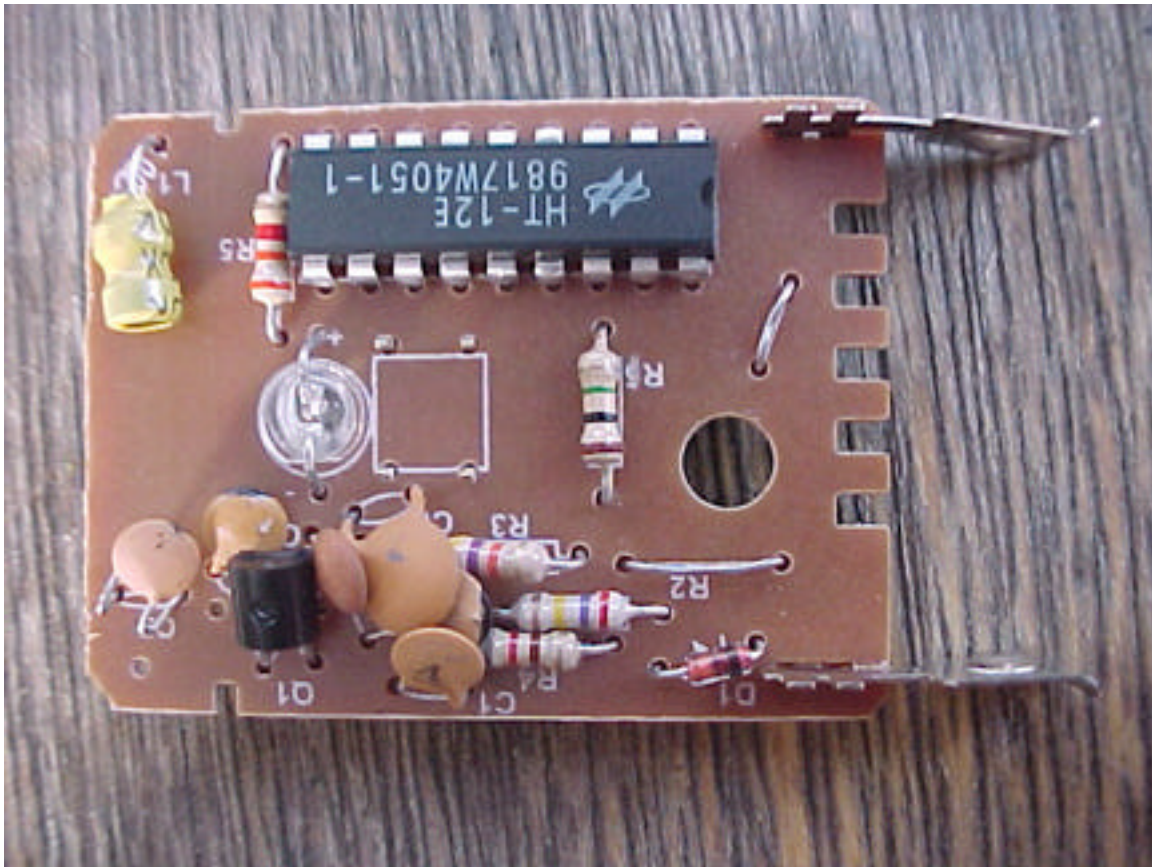

COMPONENT SIDE OF BOARD

ABOL ELECTRONIC PRODUCTS, LTD.
WIRELESS DOORBELL TRANSMITTER
Model: DC-28



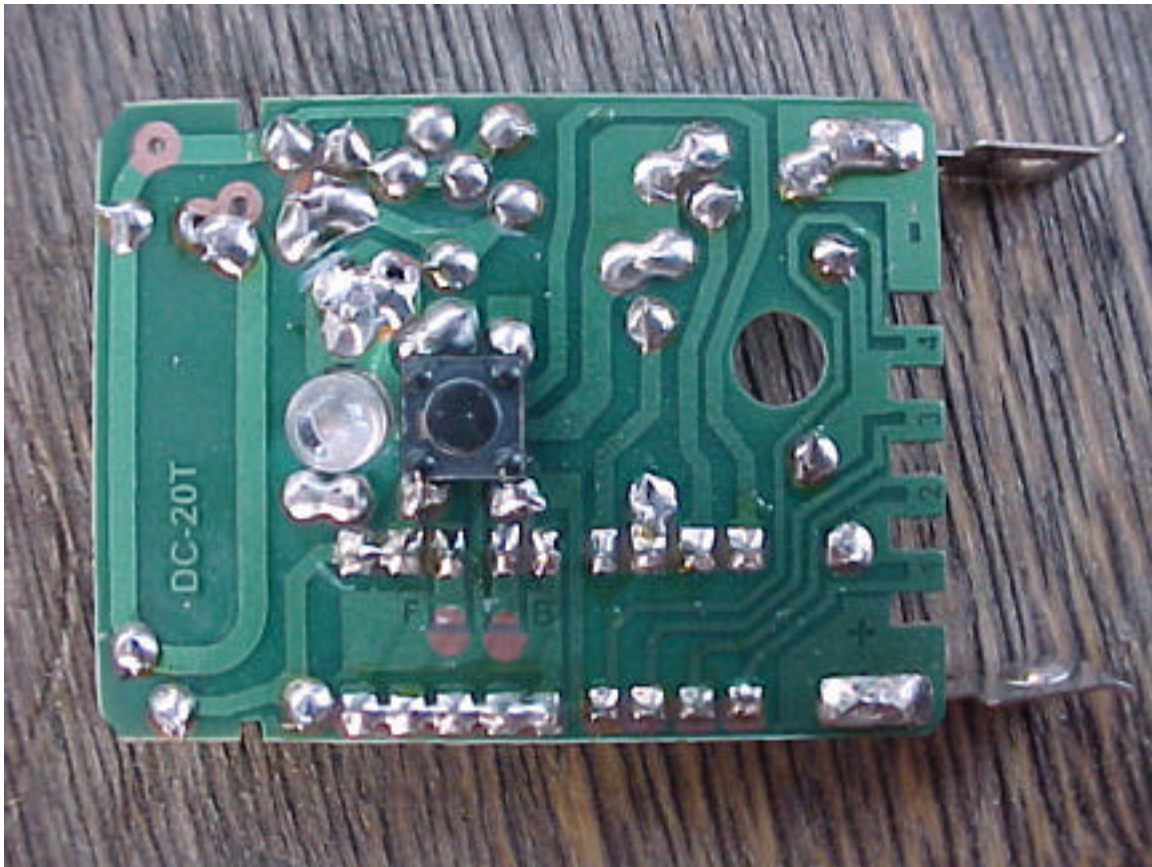

SOLDER SIDE OF BOARD

ABOL ELECTRONIC PRODUCTS, LTD.
WIRELESS DOORBELL TRANSMITTER
Model: DC-28





BOTTOM OF ASSEMBLED UNIT

ABOL ELECTRONIC PRODUCTS, LTD.
WIRELESS DOORBELL TRANSMITTER
Model: DC-28





TOP OF ASSEMBLED UNIT

ABOL ELECTRONIC PRODUCTS, LTD.
WIRELESS DOORBELL TRANSMITTER
Model: DC-28






EXTERNAL VIEW OF CASE

ABOL ELECTRONIC PRODUCTS, LTD.
WIRELESS DOORBELL TRANSMITTER
Model: DC-28



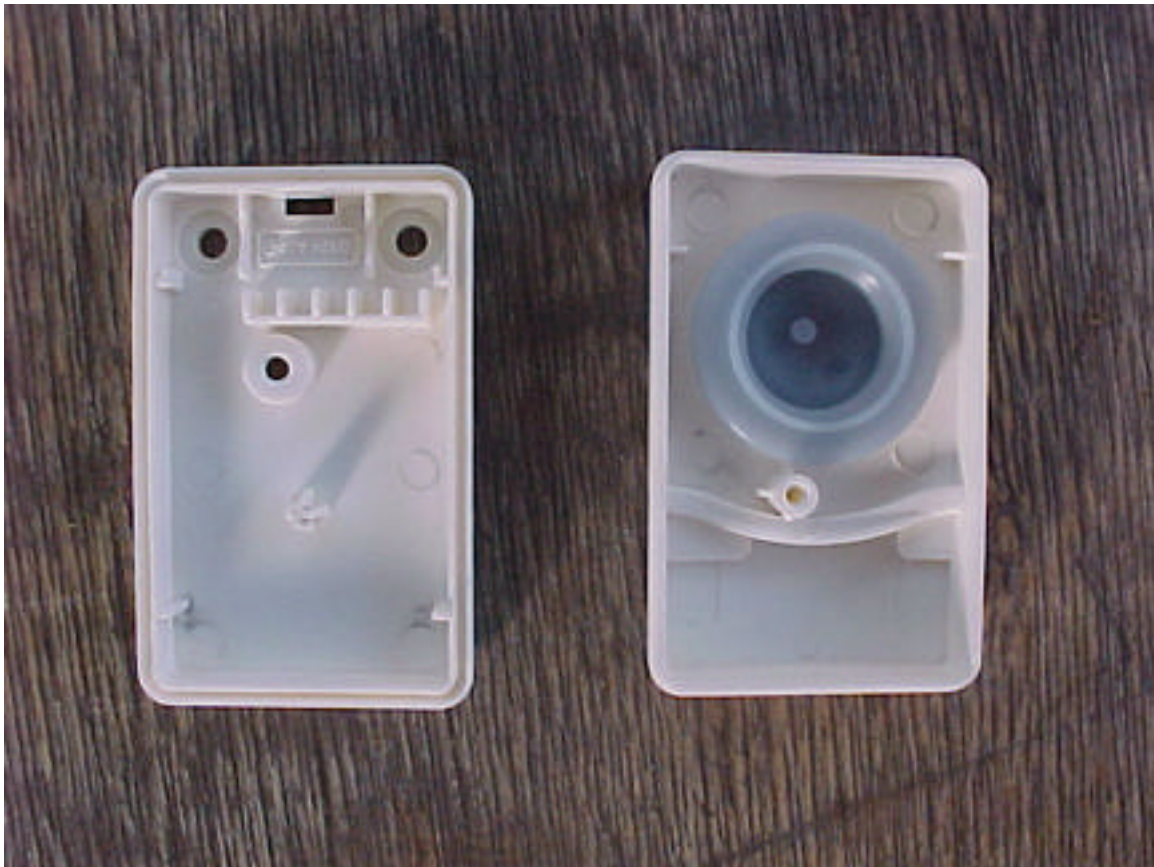

INTERNAL VIEW OF CASE

ABOL ELECTRONIC PRODUCTS, LTD.
WIRELESS DOORBELL TRANSMITTER
Model: DC-28






COMPATIBLE
ELECTRONICS


Cal: 10/15/98

LAB "B" BICONICAL ANTENNA AB-100 S/N: 1543

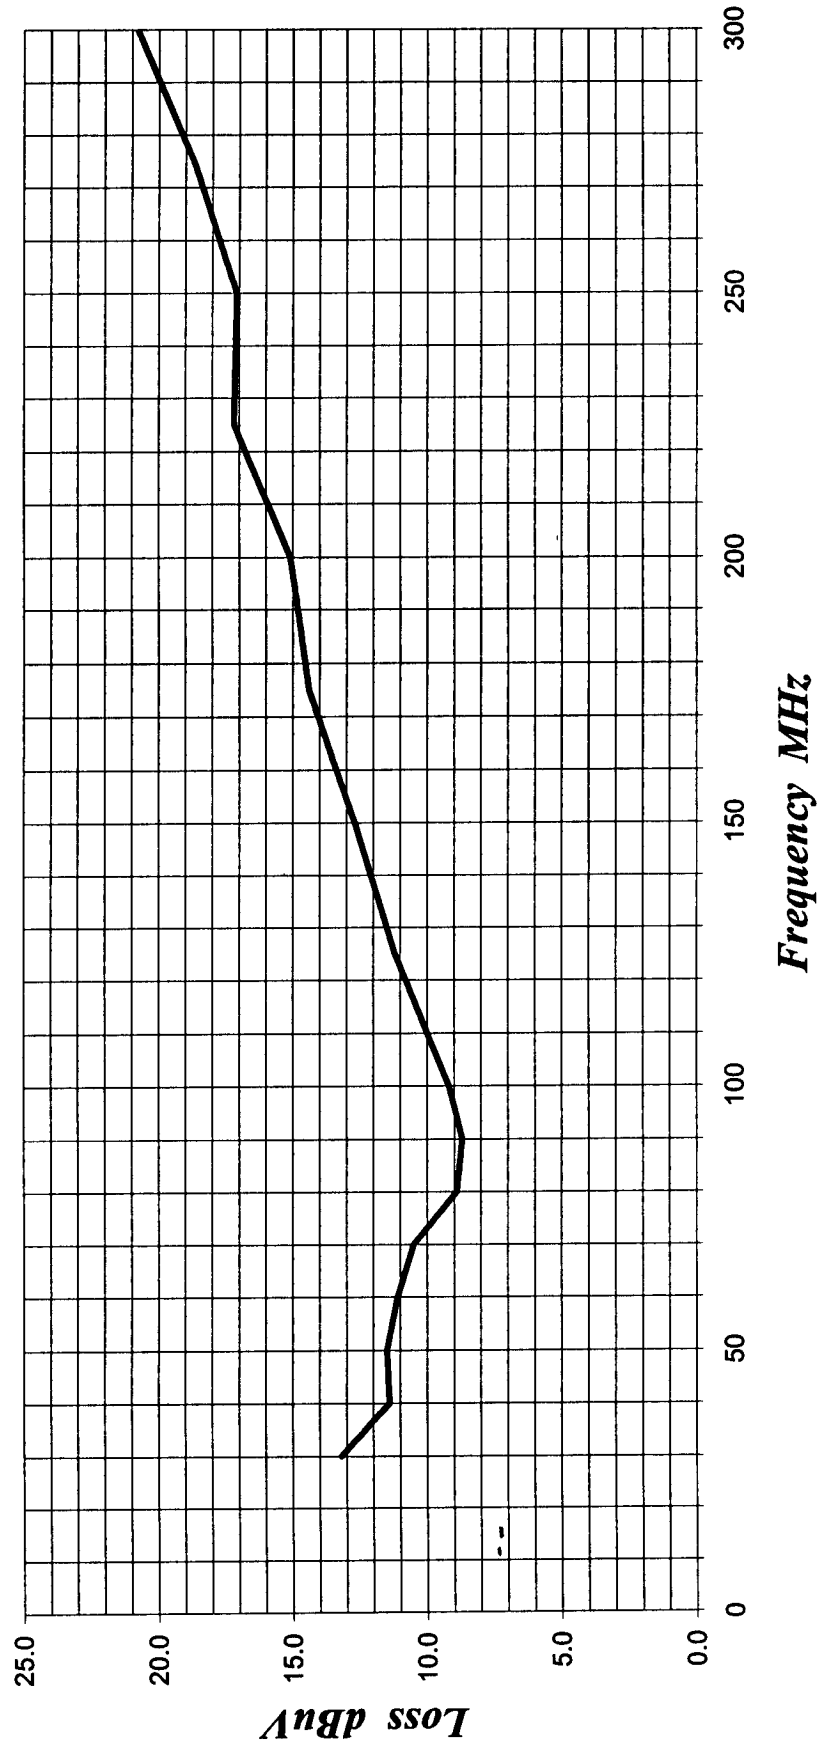

Cat: 10/15/98

LAB B LOG PERIODIC ANTENNA AL-100 S/N: 1011

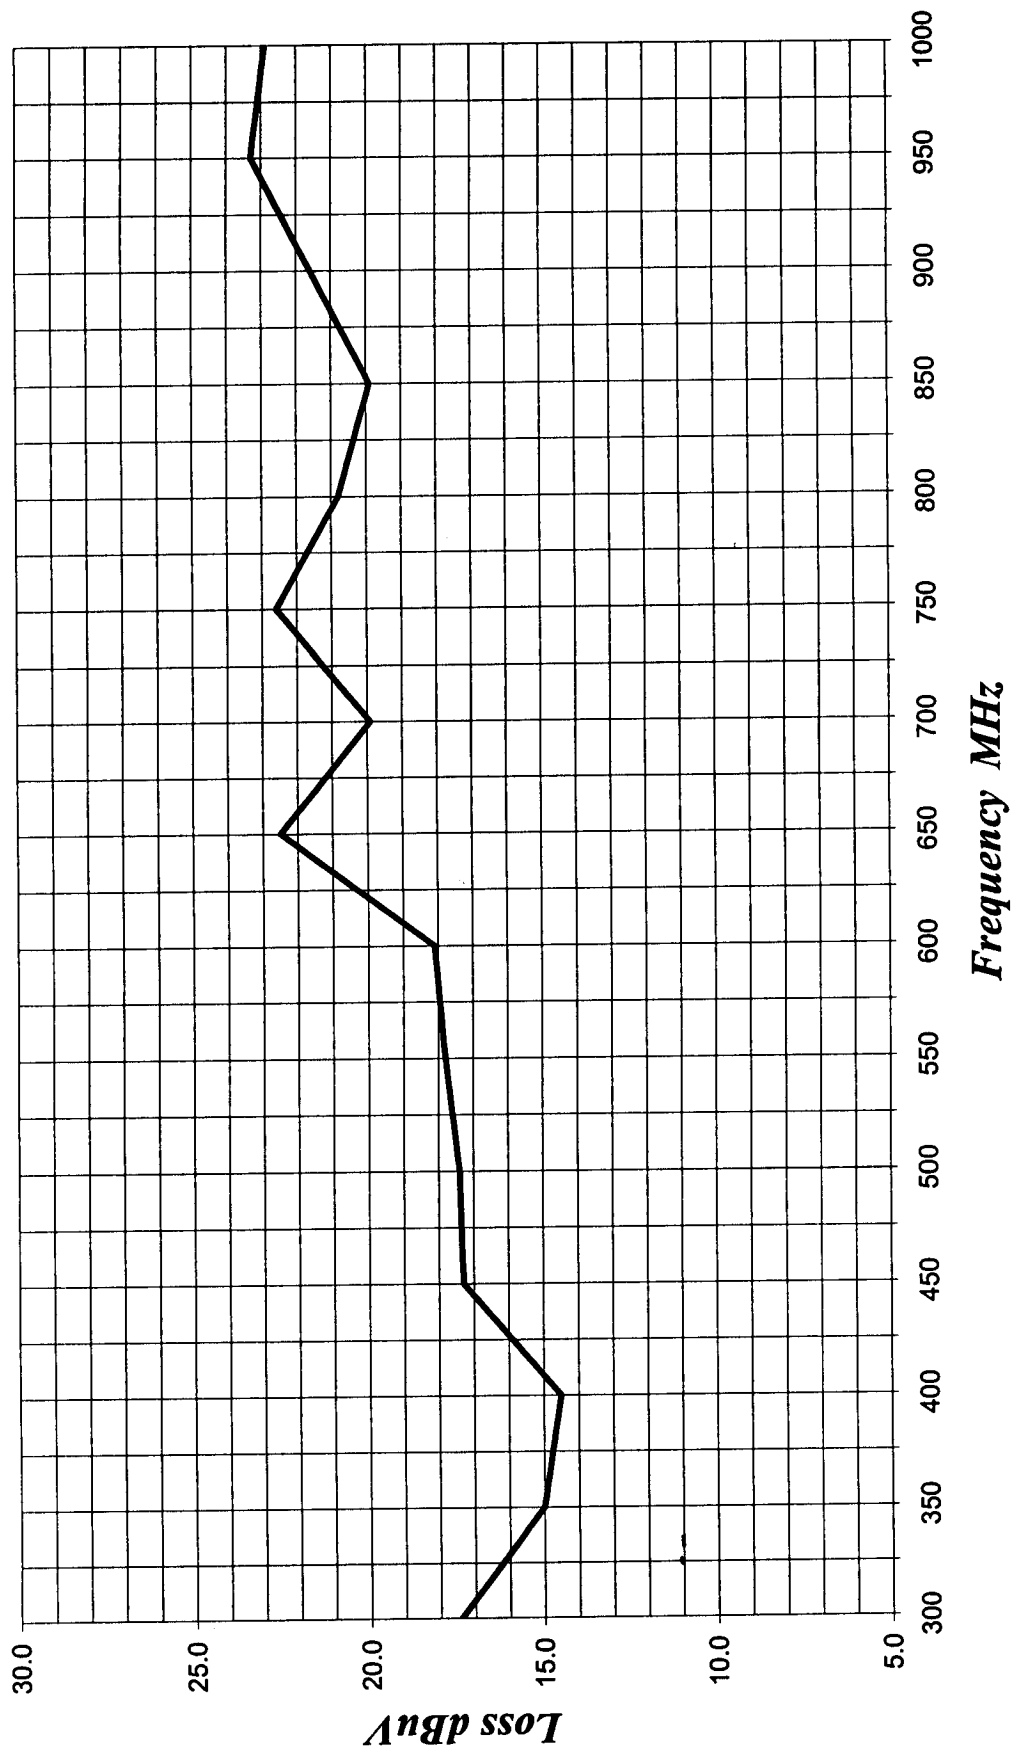





COMPATIBLE
ELECTRONICS

Lab "B" Effective: 6/18/99 Effective Gain = Preamplifier Gain - Cable Loss

**PREAMPLIFIER EFFECTIVE GAIN AT 3 METERS PA-102 S/N:
01400**

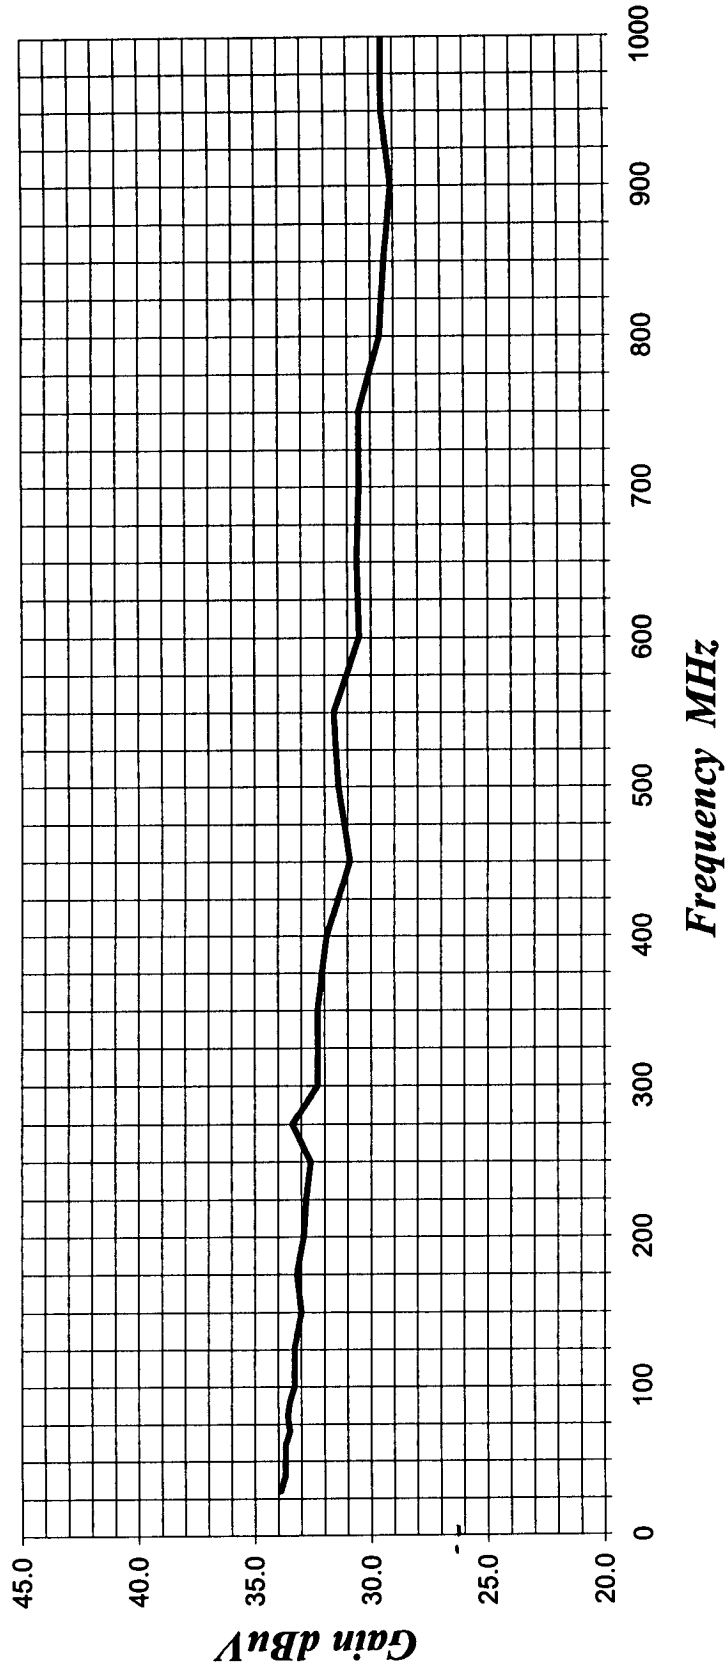



11317 Frederick Avenue, Beltsville, MD 20705

E-FIELD ANTENNA FACTOR CALIBRATION

$$E(\text{dB V/m}) = V_o(\text{dB V}) + AFE(\text{dB/m})$$

Model number : DRG-118/A

Frequency GHz	AFE dB/m	Gain dBi
1	22.3	8.0
2	28.7	9.5
3	29.7	10.1
4	29.5	12.8
5	32.3	12.0
6	32.4	13.4
7	38.1	11.0
8	37.4	10.9
9	38.8	12.5
10	39.5	10.7
11	39.6	11.5
12	39.8	12.0
13	39.7	12.8
14	41.8	11.3
15	41.9	11.9
16	38.1	16.3
17	41.0	13.9
18	48.5	8.9

Serial number : 1053
 Job number : 96-092
 Remarks : 3 meter calibration
 Standards : LPD-118/A, TE-1000

Temperature : 72° F
 Humidity : 56 %
 Traceability : A01887
 Date : December 08, 1995

 Calibrated By

HEWLETT PACKARD 8449B

MICROWAVE PREAMPLIFIER


S/N: 3008A008766

CALIBRATION DATE: JANUARY 30, 1999

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	36.9	9.5	34.3
1.1	36.3	10.0	33.7
1.2	36.4	10.5	34.1
1.3	36.2	11.0	33.7
1.4	36.3	11.5	34.0
1.5	35.7	12.0	33.9
1.6	35.9	12.5	34.4
1.7	35.7	13.0	32.9
1.8	35.6	13.5	31.6
1.9	35.5	14.0	31.8
2.0	35.4	14.5	31.9
2.5	35.6	15.0	32.2
3.0	35.2	15.5	32.8
3.5	35.2	16.0	32.4
4.0	34.3	16.5	32.1
4.5	34.1	17.0	32.3
5.0	34.3	17.5	30.3
5.5	33.0	18.0	31.5
6.0	34.1	18.5	31.2
6.5	34.5	19.0	32.2
7.0	34.3	19.5	32.0
7.5	33.9	20.0	32.0
8.0	34.5	20.5	33.2
8.5	34.5	21.0	30.9
9.0	34.4	22.0	32.1

COM-POWER CORPORATION**LOOP ANTENNA****S/N: 25309****CALIBRATION DATE: FEBRUARY 5, 1999**

FREQUENCY (MHz)	ELECTRIC FACTOR (Db/m)	FREQUENCY (MHz)	ELECTRIC FACTOR (Db/m)
0.01	11.0	1	10.4
0.02	9.9	2	10.8
0.03	11.5	3	10.8
0.04	11.2	4	10.6
0.05	9.9	5	11.4
0.06	10.4	6	11.5
0.07	10.2	7	11.2
0.08	9.9	8	11.7
0.09	9.8	9	12.7
0.1	9.7	10	10.7
0.2	7.5	12	10.1
0.3	9.9	14	10.1
0.4	9.8	15	10.6
0.5	9.8	16	10.7
0.6	10.0	18	10.0
0.7	10.0	20	10.0
0.8	9.9	25	10.3
0.9	9.9	30	10.1

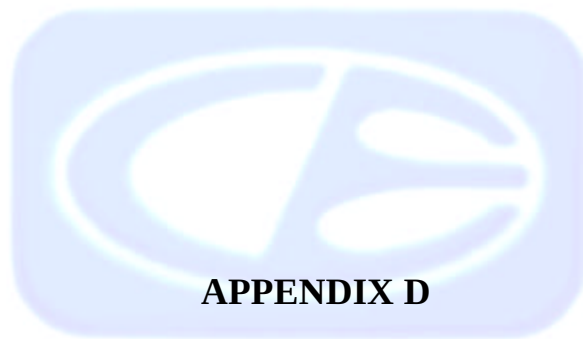

APPENDIX D

DATA SHEETS





RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	ABOL ELECTRONIC PRODUCTS, LTD.		
EUT	WIRELESS DOORBELL TRANSMITTER		
MODEL	DC-28		
S/N	N/A		
TEST ENGINEER	SCOTT McCUTCHAN		
	DATE	6/10/99	
	DUTY CYCLE	57.00 %	
	PEAK TO AVG	-4.88 dB	
	TEST DIST.	3 METERS	
	LAB	B	

[illegible]

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

*** DELTA = SPEC LIMIT - CORRECTED READING



RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	ABOL ELECTRONIC PRODUCTS, LTD.	DATE	6/10/99
EUT	WIRELESS DOORBELL TRANSMITTER	DUTY CYCLE	57.00 %
MODEL	DC-28	PEAK TO AVG	-4.88 dB
S/N	N/A	TEST DIST.	3 METERS
TEST ENGINEER	SCOTT McCUTCHAN	LAB	B

[illegible]

- CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN
- DELTA = SPEC LIMIT - CORRECTED READING


MKR Δ 370 KHZ
-0.10 dB

h_p REF 100.0 dBμV ATTEN 10 dB

10 dB/

MARKER Δ
370 KHZ
-0.10 dB
DL
60.0
dBμV

CORR'D

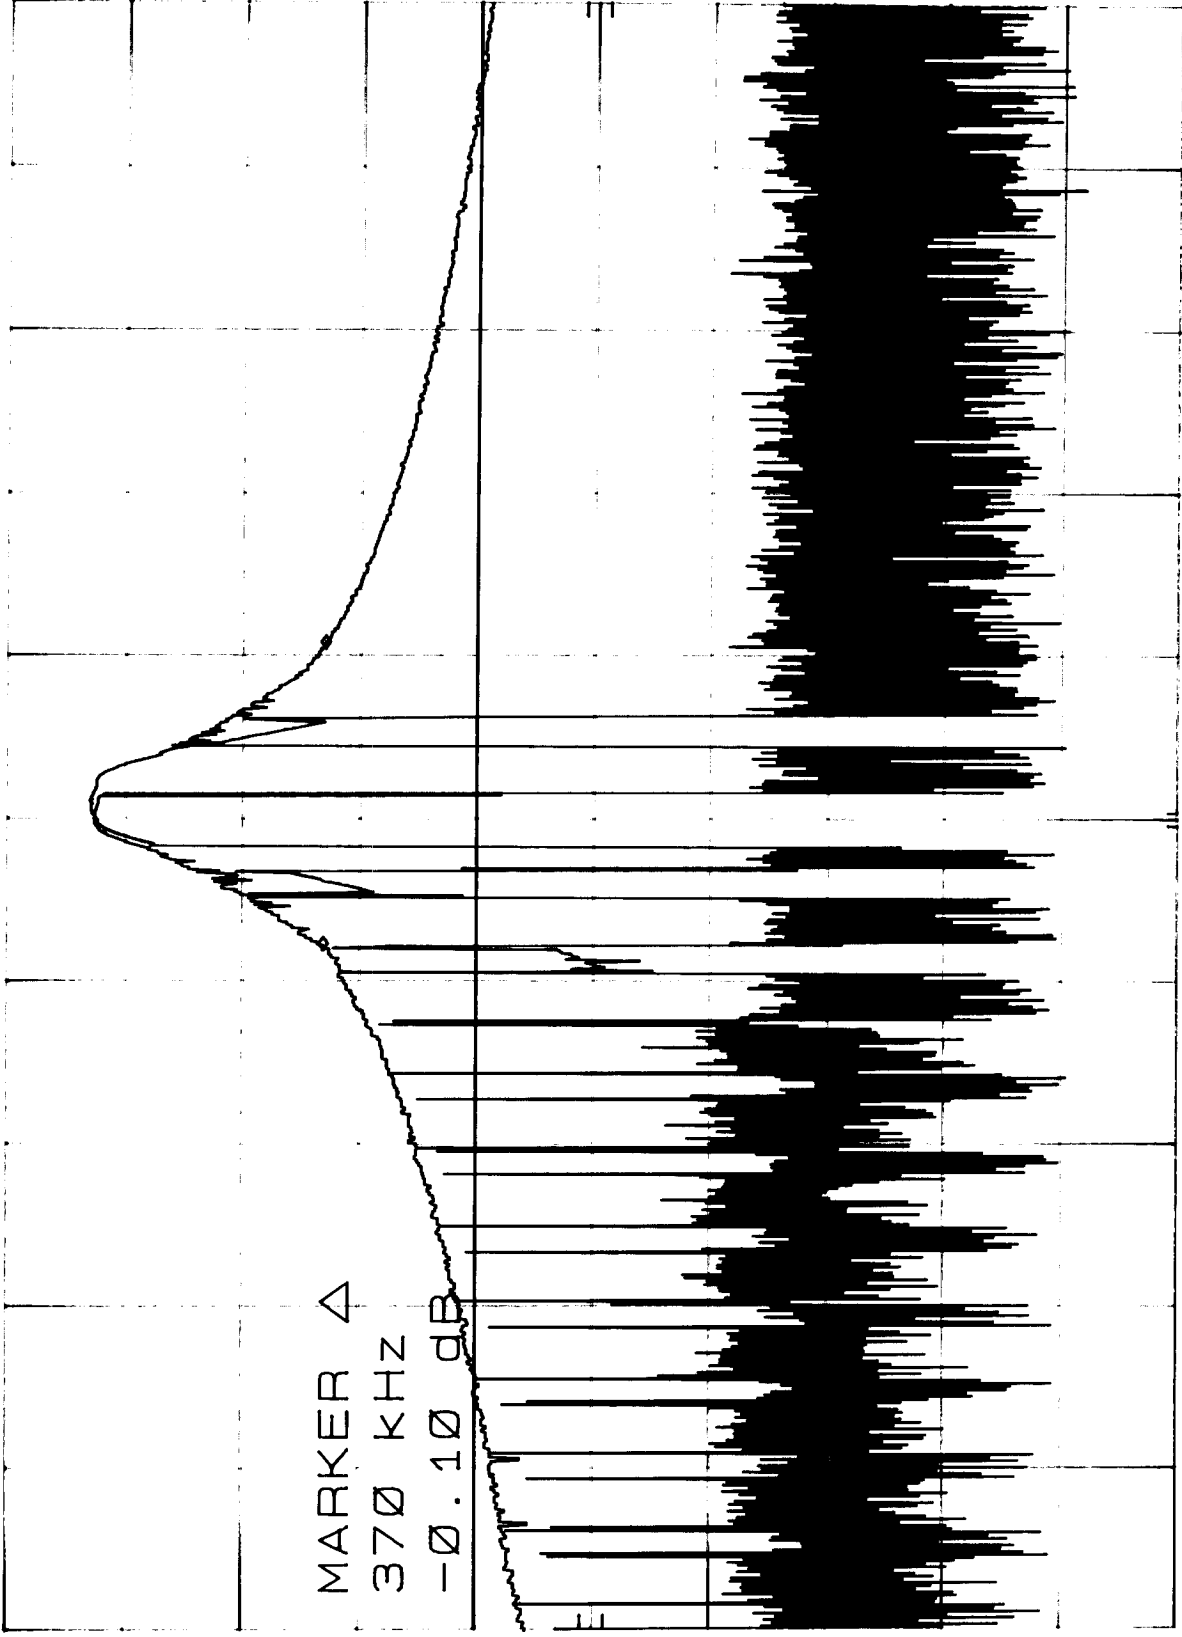

SPAN 2.00 MHz
SWP 20.0 msec

VBW 1 MHz

CENTER 303.13 MHz
RES BW 1 MHz