



TEST REPORT

Product Name : 802.11 b+g USB STICK Wireless LAN Adapter

Model Number : GN-WBKG

Brand Name : GIGABYTE

FCC ID : JCK-GN-WBKG

Applicant : GIGA-BYTE TECHNOLOGY CO., LTD.

Address : 3F-2, No. 23, Nan-Ke 3th Rd Tanin
Science-Based Industrial Park, Hsin-Shi,
Tainan 744 Taiwan, R.O.C.

Received Date : July 07, 2004

Tested Date : July 07 ~ 17, 2004

Notes :

1. This report will be invalid if duplicated or photocopied in part.
2. This report refers only to the specimen(s) submitted to testing, and be invalid as separately used.
3. This report is invalid without examination stamp and signature of this institute.
4. The tested specimen(s) will be preserved for thirty days from the data issued.
5. The report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.





Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG

Report No. : ER04-07-022FRF

Page 2 of 58

Test Report Certification

Product Name : 802.11 b+g USB STICK Wireless LAN Adapter

Model Number : GN-WBKG

Brand Name : GIGABYTE

FCC ID : JCK-GN-WBKG

Applicant : GIGA-BYTE TECHNOLOGY CO., LTD.

Measurement Standard :

FCC 47 C.F.R. Part 15, Subpart B and Subpart C (2003)
ANSI C63.4 (2001)

Tested By : Ken Tu, **Date** : July 19, 2004
(Ken Tu)

Reviewed By : Roger Sheng, **Date** : July 19, 2004
(Roger Sheng)

Approved By : Chieh-De Tsai, **Date** : July 19, 2004
(Chieh-De Tsai, Manager)



WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG
Report No. : ER04-07-022FRF
Page 3 of 58

TABLE OF CONTENTS

TITLE	PAGE NO.
1. GENERAL INFORMATION	5
1.1 General Statement	5
1.2 General Description of EUT & Power	5
1.3 Description of Peripherals	6
1.4 EUT & Peripherals Setup Diagram	6
1.5 EUT Operating Procedure	7
1.6 Description of Laboratory	7
1.7 Summary of Test Results	8
2. CONDUCTED POWERLINE TEST	9
2.1 Test Equipments	9
2.2 Test Setup	9
2.3 Conducted Power Line Emission Limit	10
2.4 Test Procedure	10
2.5 Uncertainty of Conducted Emission	10
2.6 Conducted RF Voltage Measurement	11-14
2.7 Photos of Conduction Test	15-16
3. RADIATED EMISSION TEST	17
3.1 Test Equipments	17
3.2 Test Setup	17
3.3 Radiation Limit	18
3.4 Test Procedures	19
3.5 Uncertainty of Radiated Emission	19
3.6 Radiated RF Noise Measurement	20-39
3.7 Photos of Open Site	40-41
4. 6dB BANDWIDTH MEASUREMENT	42
4.1 Test Equipments	42
4.2 Test Setup	42
4.3 Limits of 6dB Bandwidth Measurement	42
4.4 Test Procedure	42
4.5 Uncertainty of Conducted Emission	42
4.6 Test Results	43
4.7 Photo of 6db Bandwidth Measurement	44-45



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG

Report No. : ER04-07-022FRF

Page 4 of 58

TABLE OF CONTENTS

TITLE	PAGE NO.
5. MAXIMUM PEAK OUTPUT POWER	46
5.1 Test Equipments	46
5.2 Test Setup	46
5.3 Limits of Maximum Peak Output Power	46
5.4 Test Procedure	47
5.5 Uncertainty of Conducted Emission	47
5.6 Test Results	47
6. POWER SPECTRAL DENSITY MEASUREMENT	48
6.1 Test Equipments	48
6.2 Test Setup	48
6.3 Limits of Power Spectral Density Measurement	48
6.4 Test Procedure	49
6.5 Uncertainty of Conducted Emission	49
6.6 Test Results	49
6.7 Photo of Power Spectral Density Measurement	50-51
7. BAND EDGE MEASUREMENT	52
7.1 Test Equipments	52
7.2 Test Setup	52
7.3 Limits of Band Edge Emissions Measurement	52
7.4 Test Procedure	52
7.5 Uncertainty of Conducted Emission	52
7.6 Test Results	53
7.7 Photo of Band edge Measurement	54-57
8. ANTENNA REQUIREMENT	58
8.1 Standard Applicable	58
8.2 Antenna Connected Construction	58



1. GENERAL INFORMATION

1.1 General Statement

MEASUREMENT DEVIATION : Comply with standard in full

TRACEABILITY : This test result is traceable to National or International std.

1.2 General Description of EUT & Power

PRODUCT NAME : 802.11 b+g USB STICK Wireless LAN Adapter

MODEL NUMBER : GN-WBKG

FREQUENCY RANGE : 2400MHz to 2483.5MHz

FREQUENCY CHANNEL : $2412\text{MHz} + 5 \times n$ (MHz), $n=0, 1, 2, \dots, 10$

CHANNEL NUMBER : 11

CHANNEL SPACING : 5MHz

MAX AIR DATA RATE : 54Mbps (802.11g Mode), 11Mbps (802.11b Mode)

TYPE OF MODULATION : 802.11b : DSSS (CCK, DQPSK, DBPSK)

802.11g : OFDM (64QAM, 16AQM, QPSK, BPSK)

FREQUENCY SELECTION : by software / firmware

EUT DESCRIPTION : 2.4GHz (Orthogonal Frequency Division Multiplex
and Direct Sequence Spread Spectrum) data transceiver for
WLAN application

ANTENNA TYPE : Chip Antenna , Antenna Gain : 2dBi.

POWER SOURCE : 5VDC (From USB interface of Notebook)

1.3 Description of Peripherals

(1) Notebook PC

MANUFACTURER : COMPAQ CORP.
MODEL NUMBER : N800V
SERIAL NUMBER : 5Y33KSQZM0YV 1YR
INPUT POWER : 18.5VDC, 65W, 3.5A
OUTPUT POWER : -----


Adapter

MANUFACTURER : COMPAQ CORP.
MODEL NUMBER : PPP009H
SERIAL NUMBER : 2Y18650504
INPUT POWER : 100-240VAC 50/60Hz, 1.6A
OUTPUT POWER : 18.5VDC, 65W, 3.5A

(2) Printer

MANUFACTURER : HP CORP.
MODEL NUMBER : C6431D
SERIAL NUMBER : CN19T6S011
FCC ID : DOC
POWER SOURCE : 100~240VAC, 50/60Hz, 0.7A
SIGNAL CABLE : Shielded , Undetachable , 1.8m

1.4 EUT & Peripherals Setup Diagram

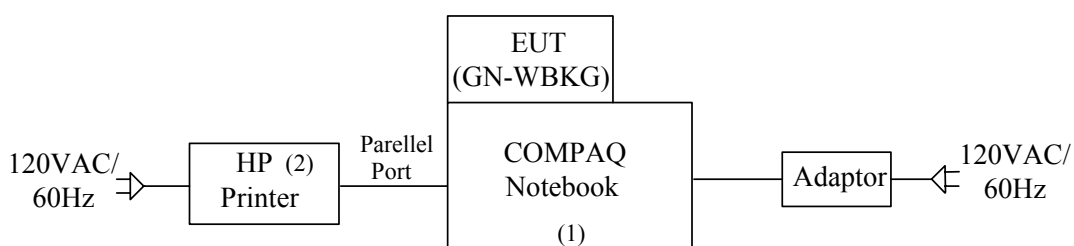

The indicated numbers (1)(2)....., please refer to item 1.3



1.5 EUT Operating Procedure

1. Run the software “ Re Config 2500 USB_QA exe ”
Select the item “ Use Ra Config (Without WPA support) ”
2. Select the item “ QA Mode – TX/RX ” to set channel; Preamble; data rate;
TX power; TX or RX
3. “ Channel ” item to select channel 1, 6, 11
“ Preamble ” item “ LONG ” to select b mode
“Preamble” item “ OFEM ” to select g mode
4. TX power for channel 1, 6, 11 (b & g mode) are set “ 1F ”

1.6 Description of Laboratory

SITE DESCRIPTION

FCC Certificate NO.	: 90585
BSMI Certificate NO.	: SL2-IN-E-0002
NVLAP Lab Code	: 200118-0
CNLA Certificate NO.	: CNLA-ZL97018
VCCI Certificate NO.	: R-1189, C-1250
TÜV Rheinland Certificate NO.	: 10008375

NAME OF SITE	: Ecom Sertech Corp. Hsin-Chu Lab. (Spin-off from ITRI / ERSO on Apr. 01, 2003)
SITE LOCATION	: Rm.258, Bldg.17, NO.195 , Sec. 4, Chung Hsing Rd., Chu-Tung Chen. Hsin-Chu, Taiwan 310 R.O.C.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG

Report No. : ER04-07-022FRF

Page 8 of 58

1.7 Summary of Test Results

The EUT has been tested according to the following specifications :

APPLIED STANDARD : FCC 47 C.F.R. Part 15, Subpart B and Subpart C			
Standard Section	Test Item and Limit	Result	REMARK
15.107 15.207	AC Power Conducted Emission Limit : Sec 15.107	PASS	Meet the requirement of limit
15.247(a)(2)	Spectrum Bandwidth of a Orthogonal Frequency Division Multiplex System Limit : 6dB bandwidth > 500KHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit : max. 30dBm	PASS	Meet the requirement of limit
15.109 15.205 15.209	Transmitter Radiated Emissions Limit : Table 15.209	PASS	Meet the requirement of limit
15.247(d)	Power Spectral Density Limit : max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band Limit: Table 15.209	PASS	Meet the requirement of limit


2. CONDUCTED POWERLINE TEST

2.1 Test Equipments

The following test equipments are used during the conducted powerline tests :

Manufacturer or Type	Model No.	Serial No.	Date of Calibration	Calibration Period	Remark
HP SPECTRUM ANALYZER & DISPLAY	8568A	2235A02320	November 14, 2003	1 Year	PRETEST
HP QUASI-PEAK ADAPTER	85650 A	2341A00672	November 14, 2003	1 Year	PRETEST
SOLAR ISOLATION TRANSFORMER	7032-1	N/A	N/A	N/A	FINAL
EMCO L.I.S.N.	3850/2	9311-1025 9401-1028	January 08, 2004 For Characteristic impedance May 18, 2004 For Insertion loss	1 Year	FINAL
R & S TEST RECEIVER	ESHS 30	838550/003	February 11, 2004	1 Year	FINAL
KEENE SHIELDED ROOM	5983	No.1	N/A	N/A	FINAL
R & S PULSE LIMIT	EHS3Z2	357.8810.52	July 10, 2004	1 Year	FINAL
N TYPE COAXIAL CABLE	-----	-----	July 10, 2004	1 Year	FINAL
50Ω TERMINATOR	-----	-----	July 10, 2004	1 Year	FINAL

2.2 Test Setup

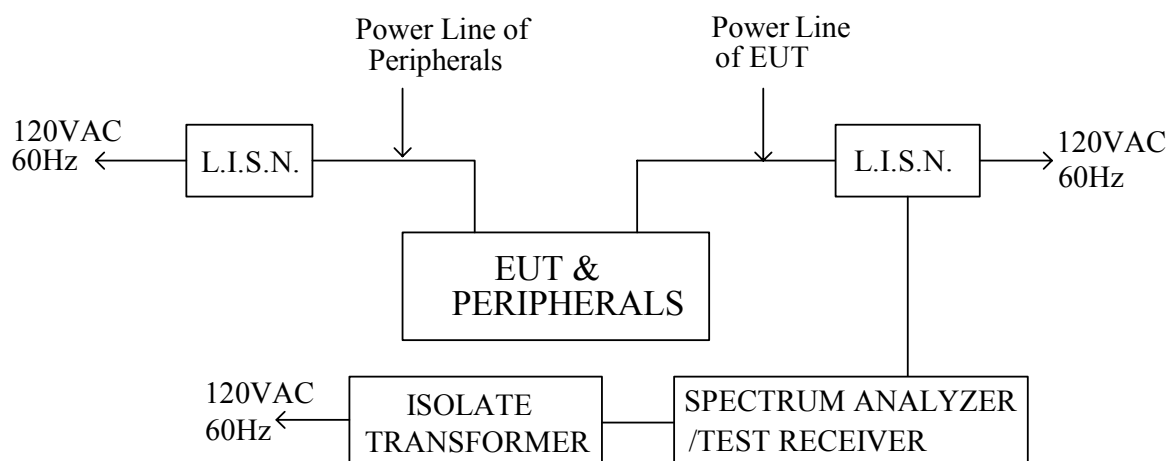

2.3 Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dB μ v)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56	56-46
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

For intentional device, according to § 15.207(a) Line Conducted Emission Limit is same as above table.

2.4 Test Procedure

The test procedure is performed in a 12ft×12ft×8ft(L×W×H) shielded room. The EUT along with its peripherals were placed on a 1.0m(W)× 1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chasis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chasis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

2.5 Uncertainty of Conducted Emission


The uncertainty of conducted emission is ± 1.36 dB.

2.6 Conducted RF Voltage Measurement

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company:	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/07/15
Product Name:	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name:	GN-WBKG	TEMP&Humidity :	25°C, 60%

LINE

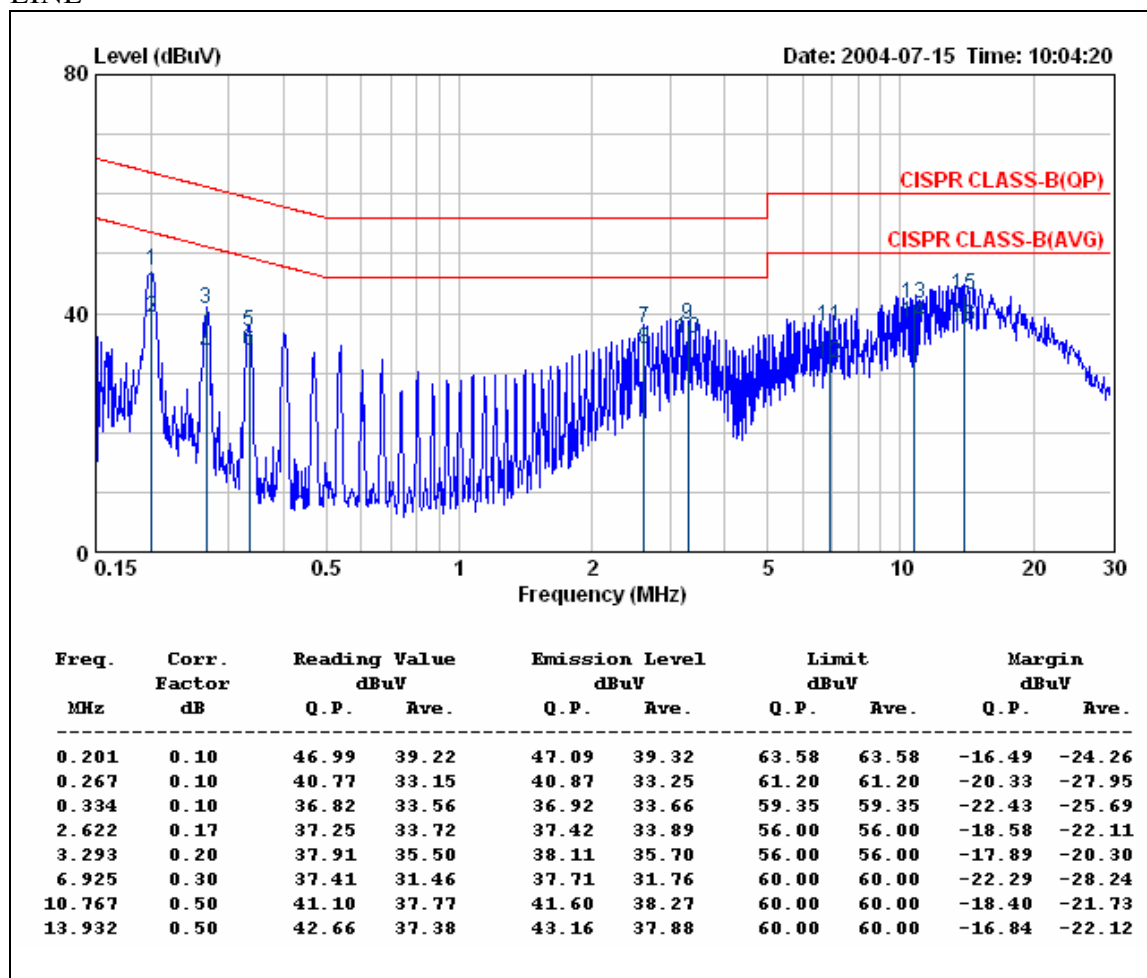

REMARKS :

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. For 802.11b mode.
4. The EUT can be operated in transmitting, stand-by and receiving mode. After preliminary scan, EUT in transmitting mode has highest emission. The EUT was set in transmitting mode at final test to get the worst case test results.



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG
Report No. : ER04-07-022FRF
Page 12 of 58

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company:	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/07/15
Product Name:	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name:	GN-WBKG	TEMP&Humidity :	25°C, 60%

NEUTRAL

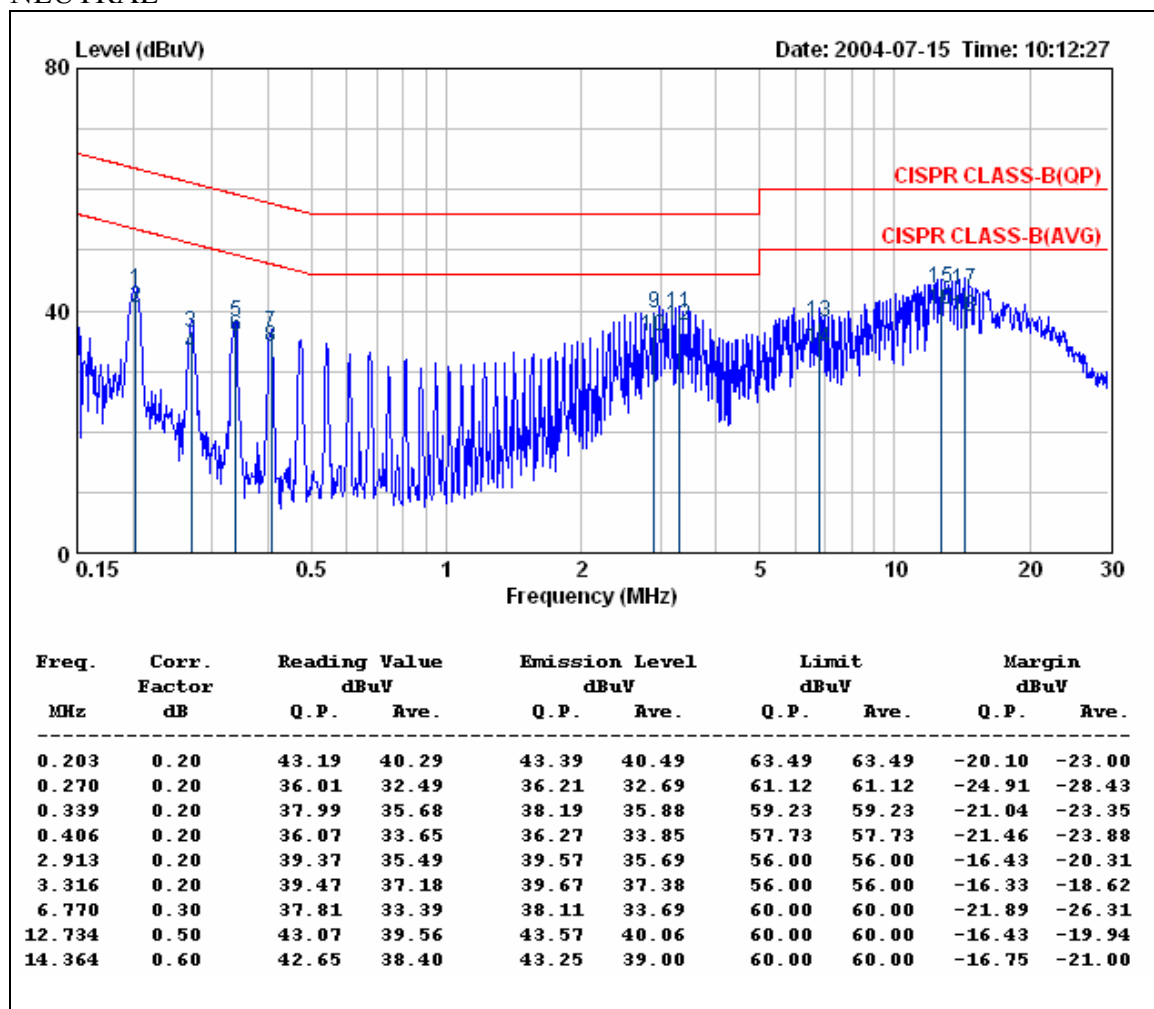

REMARKS :

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. For 802.11b mode.
4. The EUT can be operated in transmitting, stand-by and receiving mode. After preliminary scan, EUT in transmitting mode has highest emission. The EUT was set in transmitting mode at final test to get the worst case test results.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG


Report No. : ER04-07-022FRF

Page 13 of 58

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company:	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/07/15
Product Name:	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name:	GN-WBKG	TEMP&Humidity :	25°C, 60%

LINE

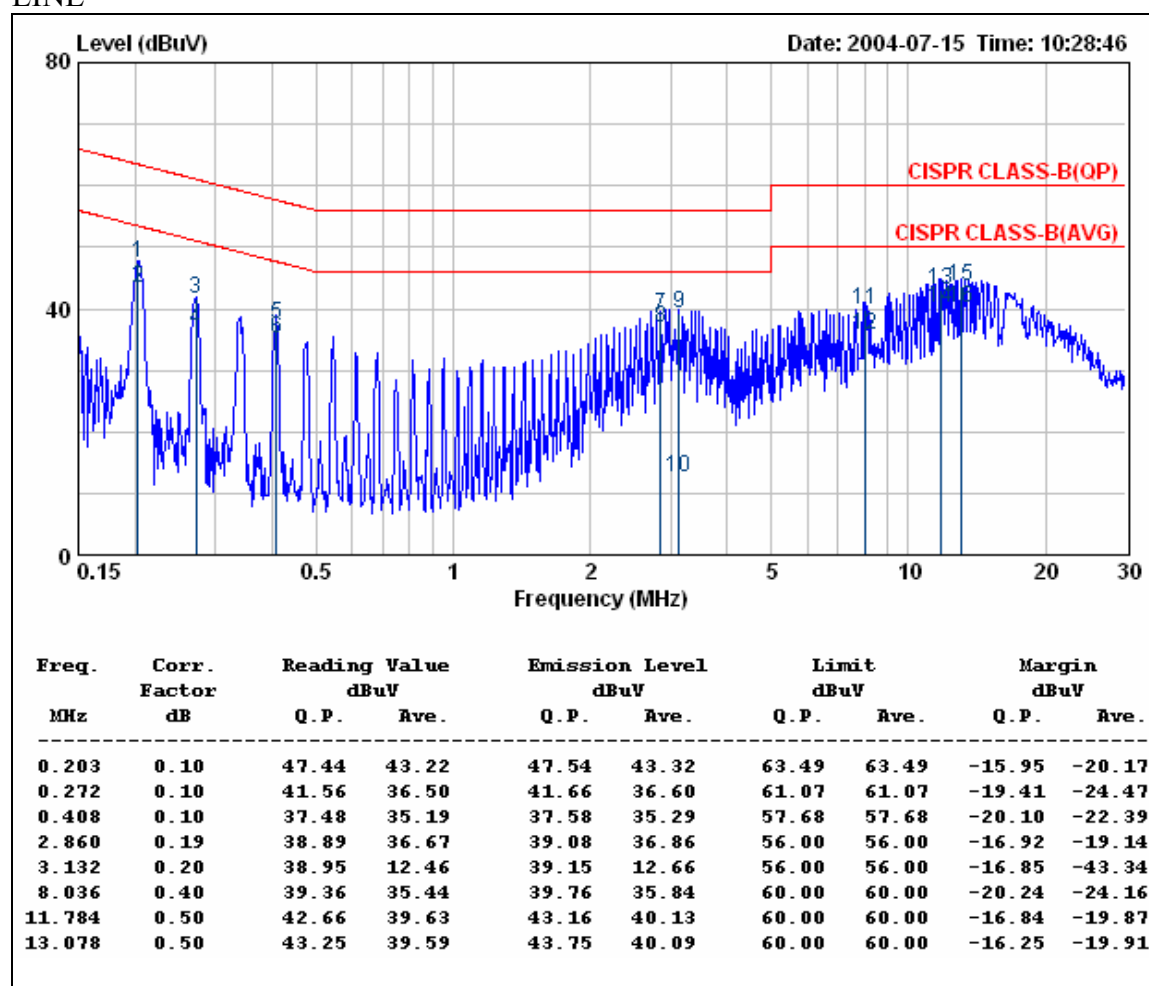

REMARKS :

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. For 802.11g mode.
4. The EUT can be operated in transmitting, stand-by and receiving mode. After preliminary scan, EUT in transmitting mode has highest emission. The EUT was set in transmitting mode at final test to get the worst case test results.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG


Report No. : ER04-07-022FRF

Page 14 of 58

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company:	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/07/15
Product Name:	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name:	GN-WBKG	TEMP&Humidity :	25°C, 60%

NEUTRAL

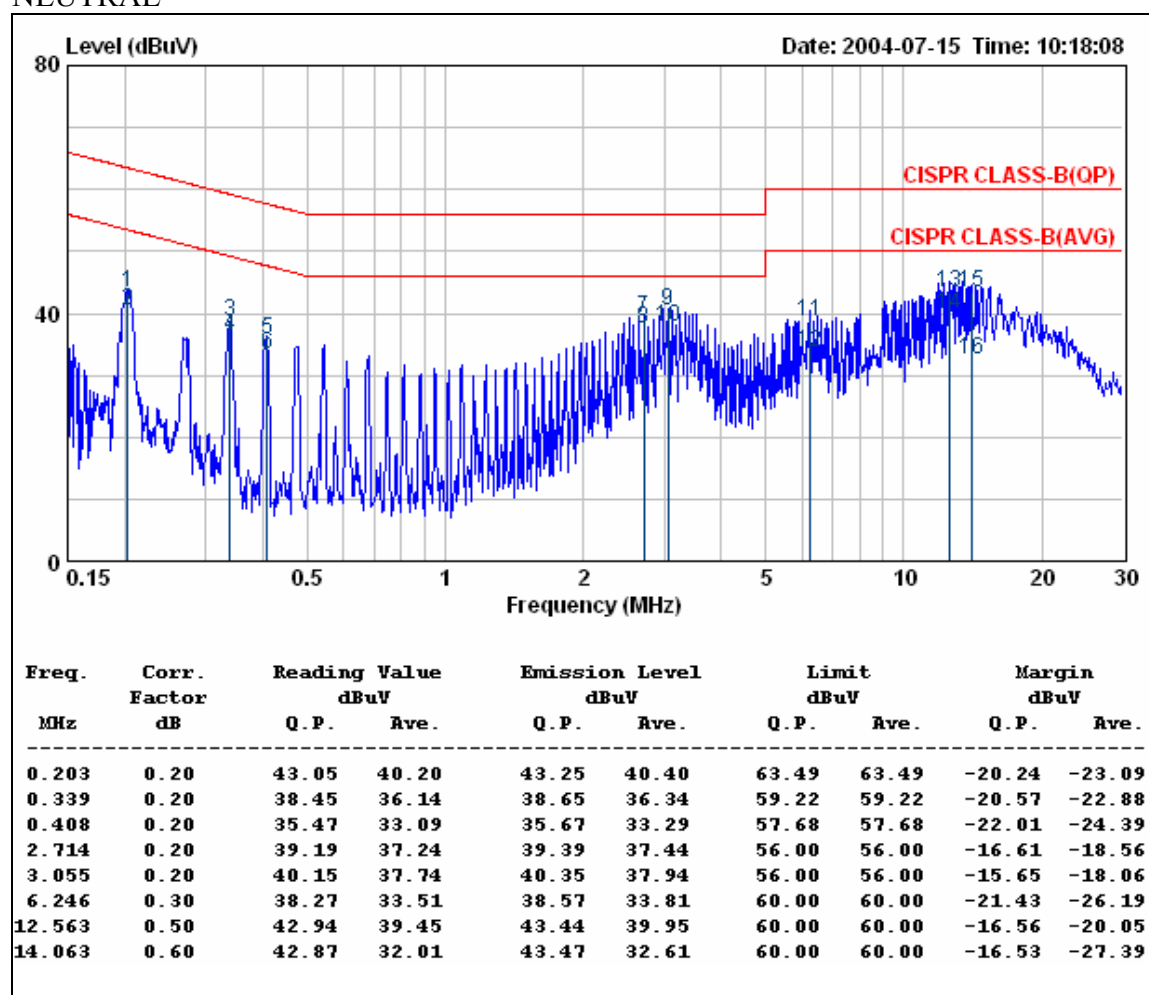

REMARKS :

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. For 802.11g mode.
4. The EUT can be operated in transmitting, stand-by and receiving mode. After preliminary scan, EUT in transmitting mode has highest emission. The EUT was set in transmitting mode at final test to get the worst case test results.

2.7 Photos of Conduction Test





Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG

Report No. : ER04-07-022FRF

Page 16 of 58



3. RADIATED EMISSION TEST


3.1 Test Equipments

The following test equipments are utilized in making the measurements contained in this report.

Manufacturer or Type	Model No	Serial No	Date of Calibration	Calibration Period	Remark
CHASE BI-LOG ANTENNA	CBL6112B	2421	May 07, 2004	1 Year	FINAL
R/S SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2004	1 Year	FINAL
OPEN SITE	-----	No.2	May 07, 2004	1 Year	FINAL
N TYPE COAXIAL CABLE	CHA9525	4	July 13, 2004	1 Year	FINAL
Horn Antenna	AH-118	10089	February 25, 2004	1 Year	FINAL
HP Pre-amplifier	8449B	3008A01471	October 11, 2003	1 Year	FINAL
HP High pass filter	84300/80038	011	CAL. ON USE	1 Year	FINAL
Horn Antenna	AH-840	03077	February 25, 2004	1 Year	FINAL


3.2 Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

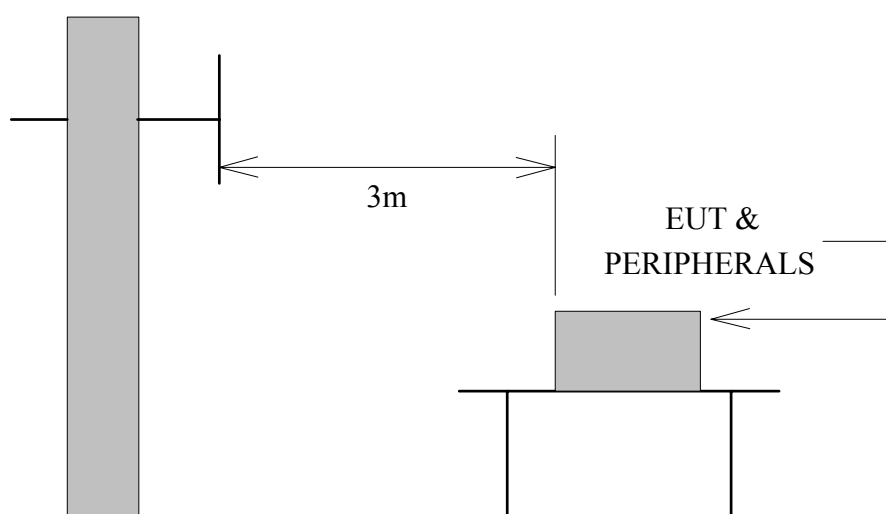

Antenna Elevation Variable

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

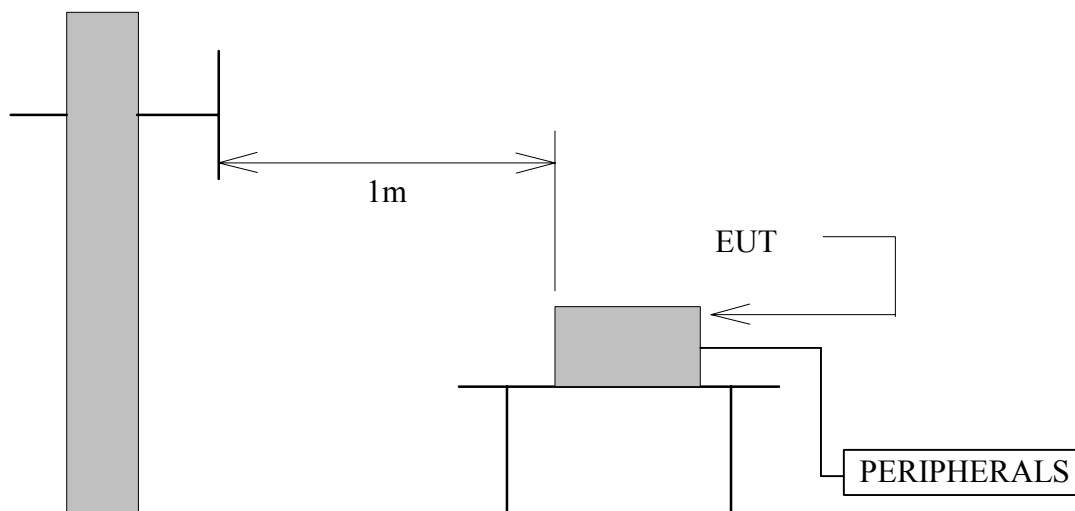

Antenna Elevation Variable

3.3 Radiation Limit

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/M)	Radiated (μV/M)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table. According to § 15.247(c), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radiofrequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

3.4 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1GHz, the EUT was set 1 meters away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

3.5 Uncertainty of Radiated Emission

The uncertainty of radiated emission is ± 2.72 dB.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG

Report No. : ER04-07-022FRF

Page 20 of 58

3.6 Radiated RF Noise Measurement

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

All readings are quasi-peak values.

Temperature : 24.9 °C

Humidity : 66 % RH

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)	Meter Reading at 3m(dBμV/M)		Limits at 3m (dBμV/M)	Emission Level at 3m(dBμV/M)	
			Horizontal	Vertical		Horizontal	Vertical
30.00	17.01	0.97	*	*	40.00	*	*
158.02	11.71	2.62	2.70	5.80	43.50	17.03	20.13
360.06	16.45	4.63	15.20	5.80	46.00	36.28	26.88
375.00	17.19	4.71	16.50	5.40	46.00	38.40	27.30
415.24	18.32	4.90	13.60	9.70	46.00	36.82	32.92
479.98	17.95	5.12	8.80	5.90	46.00	31.87	28.97
667.24	19.22	6.07	4.60	9.60	46.00	29.89	34.89
800.04	20.77	6.80	3.50	-0.30	46.00	31.07	27.27
1000.00	21.86	7.66	*	*	54.00	*	*

REMARKS :

1. * Undetectable
2. Emission level (dBμV/m) = Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dBμV).
3. According to technical experiences, all spurious emission at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
4. Mode : Wireless 802.11b Transmitting test (11Mbps).
5. The EUT can be bent and rotated vertically and horizontally to different direction. The emissions of the EUT oriented to different direction were prescanned and were found that the EUT in vertical direction has highest emission and the highest emissions were recorded as representative in final report.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG

Report No. : ER04-07-022FRF

Page 21 of 58

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

All readings are quasi-peak values.

Temperature : 24.9 °C

Humidity : 66 % RH

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)	Meter Reading at 3m(dBμV/M)		Limits at 3m (dBμV/M)	Emission Level at 3m(dBμV/M)	
			Horizontal	Vertical		Horizontal	Vertical
30.00	17.01	0.97	*	*	40.00	*	*
158.02	11.71	2.62	2.20	5.60	43.50	16.53	19.93
360.06	16.45	4.63	15.70	5.60	46.00	36.78	26.68
375.00	17.19	4.71	16.20	5.50	46.00	38.10	27.40
415.24	18.32	4.90	14.00	9.30	46.00	37.22	32.52
479.98	17.95	5.12	8.80	6.00	46.00	31.87	29.07
667.24	19.22	6.07	4.60	9.70	46.00	29.89	34.99
800.04	20.77	6.80	3.20	-0.50	46.00	30.77	27.07
1000.00	21.86	7.66	*	*	54.00	*	*

REMARKS :

1. * Undetectable
2. Emission level (dBμV/m) = Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dBμV).
3. According to technical experiences, all spurious emission at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
4. Mode : Wireless 802.11g Transmitting test (54Mbps).
5. The EUT can be bent and rotated vertically and horizontally to different direction. The emissions of the EUT oriented to different direction were prescanned and were found that the EUT in vertical direction has highest emission and the highest emissions were recorded as representative in final report.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG
Report No. : ER04-07-022FRF
Page 22 of 58

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company :	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/7/14
Product Name :	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name :	GN-WBKG	TEMP&Humidity :	25.6°C , 53%

CH1 RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1632.07	48.61	29.18	3.02	35.52	9.50	0.00	35.80	74	-38.20	P	1.0
1632.07	40.31	29.18	3.02	35.52	9.50	0.00	27.50	54	-26.50	A	1.0
2786.02	56.79	31.70	3.75	35.64	9.50	0.00	47.09	74	-26.91	P	1.0
2786.02	54.71	31.70	3.75	35.64	9.50	0.00	45.01	54	-8.99	A	1.0
5572.04	56.73	36.42	5.86	33.96	9.50	0.00	55.55	74	-18.45	P	1.0
5572.04	54.68	36.42	5.86	33.96	9.50	0.00	53.50	54	-0.50	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
9. The EUT can be bent and rotated vertically and horizontally to different direction. The emissions of the EUT oriented to different direction were prescanned and were found that the EUT in vertical direction has highest emission and the highest emissions were recorded as representative in final report.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG
Report No. : ER04-07-022FRF
Page 23 of 58

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company :	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/7/14
Product Name :	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name :	GN-WBKG	TEMP&Humidity :	25.6°C , 53%

CH1 RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1632.03	53.55	29.18	3.02	35.52	9.50	0.00	40.74	74	-33.26	P	1.0
1632.03	49.24	29.18	3.02	35.52	9.50	0.00	36.43	54	-17.57	A	1.0
2786.04	58.78	31.70	3.75	35.64	9.50	0.00	49.08	74	-24.92	P	1.0
2786.04	57.47	31.70	3.75	35.64	9.50	0.00	47.77	54	-6.23	A	1.0
5572.04	54.54	36.42	5.86	33.96	9.50	0.00	53.36	74	-20.64	P	1.0
5572.04	52.30	36.42	5.86	33.96	9.50	0.00	51.12	54	-2.88	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. The EUT can be bent and rotated vertically and horizontally to different direction. The emissions of the EUT oriented to different direction were prescanned and were found that the EUT in vertical direction has highest emission and the highest emissions were recorded as representative in final report.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG
Report No. : ER04-07-022FRF
Page 24 of 58

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company :	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/7/14
Product Name :	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name :	GN-WBKG	TEMP&Humidity :	25.6°C , 53%

CH6 RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1632.03	48.24	29.18	3.02	35.52	9.50	0.00	35.43	74	-38.57	P	1.0
1632.03	40.55	29.18	3.02	35.52	9.50	0.00	27.74	54	-26.26	A	1.0
2810.99	58.39	31.70	3.76	35.67	9.50	0.00	48.67	74	-25.33	P	1.0
2810.99	56.55	31.70	3.76	35.67	9.50	0.00	46.83	54	-7.17	A	1.0
5621.99	55.57	36.50	5.92	34.00	9.50	0.00	54.49	74	-19.51	P	1.0
5621.99	53.58	36.50	5.92	34.00	9.50	0.00	52.50	54	-1.50	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
9. The EUT can be bent and rotated vertically and horizontally to different direction. The emissions of the EUT oriented to different direction were prescanned and were found that the EUT in vertical direction has highest emission and the highest emissions were recorded as representative in final report.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG
Report No. : ER04-07-022FRF
Page 25 of 58

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company :	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/7/14
Product Name :	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name :	GN-WBKG	TEMP&Humidity :	25.6°C , 53%

CH6 RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1631.97	53.34	29.18	3.02	35.52	9.50	0.00	40.53	74	-33.47	P	1.0
1631.97	49.27	29.18	3.02	35.52	9.50	0.00	36.46	54	-17.54	A	1.0
2810.98	60.49	31.70	3.76	35.67	9.50	0.00	50.77	74	-23.23	P	1.0
2810.98	59.18	31.70	3.76	35.67	9.50	0.00	49.46	54	-4.54	A	1.0
5622.00	54.63	36.50	5.92	34.00	9.50	0.00	53.55	74	-20.45	P	1.0
5622.00	52.42	36.50	5.92	34.00	9.50	0.00	51.34	54	-2.66	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
9. The EUT can be bent and rotated vertically and horizontally to different direction. The emissions of the EUT oriented to different direction were prescanned and were found that the EUT in vertical direction has highest emission and the highest emissions were recorded as representative in final report.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG
Report No. : ER04-07-022FRF
Page 26 of 58

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company :	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/7/14
Product Name :	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name :	GN-WBKG	TEMP&Humidity :	25.6°C , 53%

CH11 RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1631.98	49.26	29.18	3.02	35.52	9.50	0.00	36.45	74	-37.55	P	1.0
1631.98	40.48	29.18	3.02	35.52	9.50	0.00	27.67	54	-26.33	A	1.0
2836.00	59.12	31.70	3.77	35.70	9.50	0.00	49.38	74	-24.62	P	1.0
2836.00	57.33	31.70	3.77	35.70	9.50	0.00	47.59	54	-6.41	A	1.0
5672.02	55.32	36.58	5.99	34.04	9.50	0.00	54.34	74	-19.66	P	1.0
5672.02	53.17	36.58	5.99	34.04	9.50	0.00	52.19	54	-1.81	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
9. The EUT can be bent and rotated vertically and horizontally to different direction. The emissions of the EUT oriented to different direction were prescanned and were found that the EUT in vertical direction has highest emission and the highest emissions were recorded as representative in final report.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG
Report No. : ER04-07-022FRF
Page 27 of 58

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company :	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/7/14
Product Name :	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name :	GN-WBKG	TEMP&Humidity :	25.6°C , 53%

CH11 RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1632.00	52.71	29.18	3.02	35.52	9.50	0.00	39.90	74	-34.10	P	1.0
1632.00	49.21	29.18	3.02	35.52	9.50	0.00	36.40	54	-17.60	A	1.0
2835.99	60.12	31.70	3.77	35.70	9.50	0.00	50.38	74	-23.62	P	1.0
2835.99	58.76	31.70	3.77	35.70	9.50	0.00	49.02	54	-4.98	A	1.0
5672.00	55.49	36.58	5.99	34.04	9.50	0.00	54.51	74	-19.49	P	1.0
5672.00	53.37	36.58	5.99	34.04	9.50	0.00	52.39	54	-1.61	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
9. The EUT can be bent and rotated vertically and horizontally to different direction. The emissions of the EUT oriented to different direction were prescanned and were found that the EUT in vertical direction has highest emission and the highest emissions were recorded as representative in final report.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG
Report No. : ER04-07-022FRF
Page 28 of 58

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company :	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/7/9
Product Name :	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name :	GN-WBKG	TEMP&Humidity :	25.1℃ , 67%

CH1 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1632.01	47.77	29.18	3.02	35.52	9.50	0.00	34.96	80.19	-45.23	P	1.00
1632.01	38.88	29.18	3.02	35.52	9.50	0.00	26.07	73.31	-47.24	A	1.00
* 2389.90	24.40	31.81	3.57	0.00	9.50	0.00	50.28	74	-23.72	P	1.00
* 2389.90	11.10	31.81	3.57	0.00	9.50	0.00	36.98	54	-17.02	A	1.00
2413.00	74.32	31.79	3.58	0.00	9.50	0.00	100.19	Fundamental Frequency		P	1.00
2413.00	67.44	31.79	3.58	0.00	9.50	0.00	93.31			A	1.00
* 2786.00	55.42	31.70	3.75	35.64	9.50	0.00	45.72	74	-28.28	P	1.00
* 2786.00	53.35	31.70	3.75	35.64	9.50	0.00	43.65	54	-10.35	A	1.00
5572.01	53.82	36.42	5.86	33.96	9.50	1.69	54.32	80.19	-25.86	P	1.00
5572.01	50.98	36.42	5.86	33.96	9.50	1.69	51.48	73.31	-21.82	A	1.00
* 12065.00	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
* 14478.00	-----	-----	-----	-----	0.00	0.67	-----	-----	-----	-----	1.00
16891.00	-----	-----	-----	-----	0.00	0.43	-----	-----	-----	-----	1.00
* 19304.00	-----	-----	-----	-----	0.00	1.96	-----	-----	-----	-----	1.00
21717.00	-----	-----	-----	-----	0.00	0.81	-----	-----	-----	-----	1.00
24130.00	-----	-----	-----	-----	0.00	2.89	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.
10. The EUT can be bent and rotated vertically and horizontally to different direction. The emissions of the EUT oriented to different direction were prescanned and were found that the EUT in vertical direction has highest emission and the highest emissions were recorded as representative in final report.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG
Report No. : ER04-07-022FRF
Page 29 of 58

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company :	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/7/9
Product Name :	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name :	GN-WBKG	TEMP&Humidity :	25.1°C , 67%

CH1 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1631.95	50.99	29.18	3.02	35.52	9.50	0.00	38.18	90.49	-52.31	P	1.00
1631.95	46.02	29.18	3.02	35.52	9.50	0.00	33.21	83.62	-50.41	A	1.00
* 2386.70	33.00	31.81	3.57	0.00	9.50	0.00	58.88	74	-15.12	P	1.00
* 2386.70	20.20	31.81	3.57	0.00	9.50	0.00	46.08	54	-7.92	A	1.00
2413.07	84.62	31.79	3.58	0.00	9.50	0.00	110.49	Fundamental Frequency		P	1.00
2413.07	77.75	31.79	3.58	0.00	9.50	0.00	103.62			A	1.00
* 2786.00	57.14	31.70	3.75	35.64	9.50	0.00	47.44	74	-26.56	P	1.00
* 2786.00	55.78	31.70	3.75	35.64	9.50	0.00	46.08	54	-7.92	A	1.00
5572.07	48.62	36.42	5.86	33.96	9.50	1.69	49.12	90.49	-41.36	P	1.00
5572.07	43.08	36.42	5.86	33.96	9.50	1.69	43.58	83.62	-40.03	A	1.00
* 12065.35	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
* 14478.42	-----	-----	-----	-----	0.00	0.67	-----	-----	-----	-----	1.00
16891.49	-----	-----	-----	-----	0.00	0.43	-----	-----	-----	-----	1.00
* 19304.56	-----	-----	-----	-----	0.00	1.97	-----	-----	-----	-----	1.00
21717.63	-----	-----	-----	-----	0.00	0.81	-----	-----	-----	-----	1.00
24130.70	-----	-----	-----	-----	0.00	2.89	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.
10. The EUT can be bent and rotated vertically and horizontally to different direction. The emissions of the EUT oriented to different direction were prescanned and were found that the EUT in vertical direction has highest emission and the highest emissions were recorded as representative in final report.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG
Report No. : ER04-07-022FRF
Page 30 of 58

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company :	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/7/9
Product Name :	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name :	GN-WBKG	TEMP&Humidity :	25.1°C , 67%

CH6 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1632.05	46.87	29.18	3.02	35.52	9.50	0.00	34.06	80.15	-46.10	P	1.00
1632.05	39.18	29.18	3.02	35.52	9.50	0.00	26.37	73.73	-47.37	A	1.00
2438.03	74.30	31.76	3.59	0.00	9.50	0.00	100.15	Fundamental Frequency		P	1.00
2438.03	67.88	31.76	3.59	0.00	9.50	0.00	93.73			A	1.00
* 2811.00	56.36	31.70	3.76	35.67	9.50	0.00	46.64	74	-27.36	P	1.00
* 2811.00	54.52	31.70	3.76	35.67	9.50	0.00	44.80	54	-9.20	A	1.00
5622.02	53.59	36.50	5.92	34.00	9.50	1.75	54.26	80.15	-25.90	P	1.00
5622.02	51.11	36.50	5.92	34.00	9.50	1.75	51.78	73.73	-21.96	A	1.00
* 12190.15	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14628.18	-----	-----	-----	-----	0.00	0.60	-----	-----	-----	-----	1.00
17066.21	-----	-----	-----	-----	0.00	0.53	-----	-----	-----	-----	1.00
* 19504.24	-----	-----	-----	-----	0.00	2.20	-----	-----	-----	-----	1.00
21942.27	-----	-----	-----	-----	0.00	0.72	-----	-----	-----	-----	1.00
24380.30	-----	-----	-----	-----	0.00	2.49	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.
10. The EUT can be bent and rotated vertically and horizontally to different direction. The emissions of the EUT oriented to different direction were prescanned and were found that the EUT in vertical direction has highest emission and the highest emissions were recorded as representative in final report.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG
Report No. : ER04-07-022FRF
Page 31 of 58

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company :	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/7/9
Product Name :	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name :	GN-WBKG	TEMP&Humidity :	25.1℃ , 67%

CH6 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1632.02	51.22	29.18	3.02	35.52	9.50	0.00	38.41	89.27	-50.87	P	1.00
1632.02	46.37	29.18	3.02	35.52	9.50	0.00	33.56	82.33	-48.78	A	1.00
2437.98	83.42	31.76	3.59	0.00	9.50	0.00	109.27	Fundamental Frequency		P	1.00
2437.98	76.48	31.76	3.59	0.00	9.50	0.00	102.33			A	1.00
* 2811.02	58.85	31.70	3.76	35.67	9.50	0.00	49.13	74	-24.87	P	1.00
* 2811.02	57.50	31.70	3.76	35.67	9.50	0.00	47.78	54	-6.22	A	1.00
5622.00	50.03	36.50	5.92	34.00	9.50	1.75	50.70	89.27	-38.58	P	1.00
5622.00	45.59	36.50	5.92	34.00	9.50	1.75	46.26	82.33	-36.08	A	1.00
* 12189.90	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14627.88	-----	-----	-----	-----	0.00	0.60	-----	-----	-----	-----	1.00
17065.86	-----	-----	-----	-----	0.00	0.53	-----	-----	-----	-----	1.00
* 19503.84	-----	-----	-----	-----	0.00	2.20	-----	-----	-----	-----	1.00
21941.82	-----	-----	-----	-----	0.00	0.72	-----	-----	-----	-----	1.00
24379.80	-----	-----	-----	-----	0.00	2.49	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark "*" means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps.
- The EUT can be bent and rotated vertically and horizontally to different direction. The emissions of the EUT oriented to different direction were prescanned and were found that the EUT in vertical direction has highest emission and the highest emissions were recorded as representative in final report.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG
Report No. : ER04-07-022FRF
Page 32 of 58

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company :	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/7/9
Product Name :	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name :	GN-WBKG	TEMP&Humidity :	25.1°C , 67%

CH11 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1632.01	47.72	29.18	3.02	35.52	9.50	0.00	34.91	80.66	-45.76	P	1.00
1632.01	39.04	29.18	3.02	35.52	9.50	0.00	26.23	74.38	-48.16	A	1.00
2459.62	74.82	31.74	3.60	0.00	9.50	0.00	100.66	Fundamental Frequency		P	1.00
2459.62	68.54	31.74	3.60	0.00	9.50	0.00	94.38			A	1.00
* 2483.60	22.00	31.72	3.61	0.00	9.50	0.00	47.83	74	-26.17	P	1.00
* 2483.60	9.90	31.72	3.61	0.00	9.50	0.00	35.73	54	-18.27	A	1.00
* 2836.00	57.01	31.70	3.77	35.70	9.50	0.00	47.27	74	-26.73	P	1.00
* 2836.00	55.12	31.70	3.77	35.70	9.50	0.00	45.38	54	-8.62	A	1.00
5672.03	52.76	36.58	5.99	34.04	9.50	1.81	53.59	80.66	-27.07	P	1.00
5672.03	49.87	36.58	5.99	34.04	9.50	1.81	50.70	74.38	-23.68	A	1.00
* 12298.10	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14757.72	-----	-----	-----	-----	0.00	0.49	-----	-----	-----	-----	1.00
17217.34	-----	-----	-----	-----	0.00	0.59	-----	-----	-----	-----	1.00
* 19676.96	-----	-----	-----	-----	0.00	2.38	-----	-----	-----	-----	1.00
* 22136.58	-----	-----	-----	-----	0.00	0.70	-----	-----	-----	-----	1.00
24596.20	-----	-----	-----	-----	0.00	2.17	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark "*" means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps.
- The EUT can be bent and rotated vertically and horizontally to different direction. The emissions of the EUT oriented to different direction were prescanned and were found that the EUT in vertical direction has highest emission and the highest emissions were recorded as representative in final report.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG
Report No. : ER04-07-022FRF
Page 33 of 58

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company :	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/7/9
Product Name :	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name :	GN-WBKG	TEMP&Humidity :	25.1°C , 67%

CH11 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
1631.99	50.03	29.18	3.02	35.52	9.50	0.00	37.22	89.01	-51.80	P	1.00
1631.99	44.64	29.18	3.02	35.52	9.50	0.00	31.83	82.76	-50.94	A	1.00
2458.76	83.17	31.74	3.60	0.00	9.50	0.00	109.01	Fundamental Frequency		P	1.00
2458.76	76.92	31.74	3.60	0.00	9.50	0.00	102.76			A	1.00
* 2483.60	26.70	31.72	3.61	0.00	9.50	0.00	52.53	74	-21.47	P	1.00
* 2483.60	15.10	31.72	3.61	0.00	9.50	0.00	40.93	54	-13.07	A	1.00
* 2836.02	58.25	31.70	3.77	35.70	9.50	0.00	48.51	74	-25.49	P	1.00
* 2836.02	56.69	31.70	3.77	35.70	9.50	0.00	46.95	54	-7.05	A	1.00
5672.01	51.38	36.58	5.99	34.04	9.50	1.81	52.21	89.01	-36.80	P	1.00
5672.01	48.45	36.58	5.99	34.04	9.50	1.81	49.28	82.76	-33.48	A	1.00
* 12293.80	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14752.56	-----	-----	-----	-----	0.00	0.50	-----	-----	-----	-----	1.00
17211.32	-----	-----	-----	-----	0.00	0.58	-----	-----	-----	-----	1.00
* 19670.08	-----	-----	-----	-----	0.00	2.37	-----	-----	-----	-----	1.00
* 22128.84	-----	-----	-----	-----	0.00	0.70	-----	-----	-----	-----	1.00
24587.60	-----	-----	-----	-----	0.00	2.18	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.
10. The EUT can be bent and rotated vertically and horizontally to different direction. The emissions of the EUT oriented to different direction were prescanned and were found that the EUT in vertical direction has highest emission and the highest emissions were recorded as representative in final report.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG
Report No. : ER04-07-022FRF
Page 34 of 58

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company :	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/7/9
Product Name :	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name :	GN-WBKG	TEMP&Humidity :	25.1°C , 67%

CH1 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2389.90	27.20	31.81	3.57	0.00	9.50	0.00	53.08	74	-20.92	P	1.00
* 2389.90	11.40	31.81	3.57	0.00	9.50	0.00	37.28	54	-16.72	A	1.00
2413.75	71.85	31.79	3.58	0.00	9.50	0.00	97.72	Fundamental Frequency		P	1.00
2413.75	62.07	31.79	3.58	0.00	9.50	0.00	87.94			A	1.00
* 2785.99	55.94	31.70	3.75	35.64	9.50	0.00	46.24	74	-27.76	P	1.00
* 2785.99	53.65	31.70	3.75	35.64	9.50	0.00	43.95	54	-10.05	A	1.00
5572.02	53.43	36.42	5.86	33.96	9.50	1.69	53.93	77.72	-23.78	P	1.00
5572.02	50.98	36.42	5.86	33.96	9.50	1.69	51.48	67.94	-16.45	A	1.00
* 8358.00	44.61	39.24	7.54	34.38	9.50	0.79	48.29	74	-25.71	P	1.00
* 8358.00	32.98	39.24	7.54	34.38	9.50	0.79	36.66	54	-17.34	A	1.00
* 12068.75	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
* 14482.50	-----	-----	-----	-----	0.00	0.68	-----	-----	-----	-----	1.00
16896.25	-----	-----	-----	-----	0.00	0.44	-----	-----	-----	-----	1.00
* 19310.00	-----	-----	-----	-----	0.00	1.97	-----	-----	-----	-----	1.00
21723.75	-----	-----	-----	-----	0.00	0.81	-----	-----	-----	-----	1.00
24137.50	-----	-----	-----	-----	0.00	2.88	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 54Mbps.
10. The EUT can be bent and rotated vertically and horizontally to different direction. The emissions of the EUT oriented to different direction were prescanned and were found that the EUT in vertical direction has highest emission and the highest emissions were recorded as representative in final report.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG
Report No. : ER04-07-022FRF
Page 35 of 58

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company :	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/7/9
Product Name :	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name :	GN-WBKG	TEMP&Humidity :	25.1°C , 67%

CH1 TX				Measurement Distance at 1m				Vertical polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
* 2389.78	37.00	31.81	3.57	0.00	9.50	0.00	62.88	74	-11.12	P	1.00
* 2389.78	16.90	31.81	3.57	0.00	9.50	0.00	42.78	54	-11.22	A	1.00
2406.38	81.87	31.79	3.58	0.00	9.50	0.00	107.74	Fundamental Frequency		P	1.00
2406.38	72.14	31.79	3.58	0.00	9.50	0.00	98.01			A	1.00
* 2785.91	59.14	31.70	3.75	35.64	9.50	0.00	49.44	74	-24.56	P	1.00
* 2785.91	57.90	31.70	3.75	35.64	9.50	0.00	48.20	54	-5.80	A	1.00
5571.93	49.09	36.42	5.86	33.96	9.50	1.69	49.59	87.74	-38.15	P	1.00
5571.93	43.23	36.42	5.86	33.96	9.50	1.69	43.73	78.01	-34.28	A	1.00
* 8358.00	42.83	39.24	7.54	34.38	9.50	0.79	46.51	74	-27.49	P	1.00
* 8358.00	33.54	39.24	7.54	34.38	9.50	0.79	37.22	54	-16.78	A	1.00
* 12031.90	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14438.28	-----	-----	-----	-----	0.00	0.63	-----	-----	-----	-----	1.00
16844.66	-----	-----	-----	-----	0.00	0.41	-----	-----	-----	-----	1.00
* 19251.04	-----	-----	-----	-----	0.00	1.90	-----	-----	-----	-----	1.00
21657.42	-----	-----	-----	-----	0.00	0.84	-----	-----	-----	-----	1.00
24063.80	-----	-----	-----	-----	0.00	3.00	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 54Mbps.
10. The EUT can be bent and rotated vertically and horizontally to different direction. The emissions of the EUT oriented to different direction were prescanned and were found that the EUT in vertical direction has highest emission and the highest emissions were recorded as representative in final report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG
Report No. : ER04-07-022FRF
Page 36 of 58

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company :	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/7/9
Product Name :	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name :	GN-WBKG	TEMP&Humidity :	25.1°C , 67%

CH6 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2431.33	72.56	31.77	3.59	0.00	9.50	0.00	98.42	Fundamental Frequency		P	1.00
2431.33	63.29	31.77	3.59	0.00	9.50	0.00	89.15			A	1.00
* 2811.04	57.62	31.70	3.76	35.67	9.50	0.00	47.90	74	-26.10	P	1.00
* 2811.04	55.97	31.70	3.76	35.67	9.50	0.00	46.25	54	-7.75	A	1.00
5622.00	53.79	36.50	5.92	34.00	9.50	1.75	54.46	78.42	-23.96	P	1.00
5622.00	51.26	36.50	5.92	34.00	9.50	1.75	51.93	69.15	-17.22	A	1.00
* 8433.00	44.61	39.17	7.60	33.81	9.50	0.74	48.80	74	-25.20	P	1.00
* 8433.00	33.26	39.17	7.60	33.81	9.50	0.74	37.45	54	-16.55	A	1.00
* 12156.65	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14587.98	-----	-----	-----	-----	0.00	0.63	-----	-----	-----	-----	1.00
17019.31	-----	-----	-----	-----	0.00	0.51	-----	-----	-----	-----	1.00
* 19450.64	-----	-----	-----	-----	0.00	2.14	-----	-----	-----	-----	1.00
21881.97	-----	-----	-----	-----	0.00	0.75	-----	-----	-----	-----	1.00
24313.30	-----	-----	-----	-----	0.00	2.60	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark "*" means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11g mode at 54Mbps.
- The EUT can be bent and rotated vertically and horizontally to different direction. The emissions of the EUT oriented to different direction were prescanned and were found that the EUT in vertical direction has highest emission and the highest emissions were recorded as representative in final report.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG
Report No. : ER04-07-022FRF
Page 37 of 58

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company :	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/7/9
Product Name :	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name :	GN-WBKG	TEMP&Humidity :	25.1℃ , 67%

CH6 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2437.75	80.06	31.76	3.59	0.00	9.50	0.00	105.91	Fundamental Frequency		P	1.00
2437.75	71.17	31.76	3.59	0.00	9.50	0.00	97.02			A	1.00
* 2810.99	59.84	31.70	3.76	35.67	9.50	0.00	50.12	74	-23.88	P	1.00
* 2810.99	58.64	31.70	3.76	35.67	9.50	0.00	48.92	54	-5.08	A	1.00
5622.03	49.86	36.50	5.92	34.00	9.50	1.75	50.53	85.91	-35.39	P	1.00
5622.03	46.55	36.50	5.92	34.00	9.50	1.75	47.22	77.02	-29.81	A	1.00
* 8433.00	44.87	39.17	7.60	33.81	9.50	0.74	49.06	74	-24.94	P	1.00
* 8433.00	33.49	39.17	7.60	33.81	9.50	0.74	37.68	54	-16.32	A	1.00
* 12188.75	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14626.50	-----	-----	-----	-----	0.00	0.60	-----	-----	-----	-----	1.00
17064.25	-----	-----	-----	-----	0.00	0.53	-----	-----	-----	-----	1.00
* 19502.00	-----	-----	-----	-----	0.00	2.20	-----	-----	-----	-----	1.00
21939.75	-----	-----	-----	-----	0.00	0.72	-----	-----	-----	-----	1.00
24377.50	-----	-----	-----	-----	0.00	2.50	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 54Mbps.
10. The EUT can be bent and rotated vertically and horizontally to different direction. The emissions of the EUT oriented to different direction were prescanned and were found that the EUT in vertical direction has highest emission and the highest emissions were recorded as representative in final report.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG

Report No. : ER04-07-022FRF

Page 38 of 58

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company :	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/7/9
Product Name :	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name :	GN-WBKG	TEMP&Humidity :	25.1℃ , 67%

CH11 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2456.38	72.31	31.74	3.60	0.00	9.50	0.00	98.15	Fundamental Frequency		P	1.00
2456.38	63.30	31.74	3.60	0.00	9.50	0.00	89.14			A	1.00
* 2483.60	22.30	31.72	3.61	0.00	9.50	0.00	48.13	74	-25.87	P	1.00
* 2483.60	10.10	31.72	3.61	0.00	9.50	0.00	35.93	54	-18.07	A	1.00
* 2835.92	58.29	31.70	3.77	35.70	9.50	0.00	48.55	74	-25.45	P	1.00
* 2835.92	56.54	31.70	3.77	35.70	9.50	0.00	46.80	54	-7.20	A	1.00
5671.99	52.63	36.58	5.99	34.04	9.50	1.81	53.46	78.15	-24.69	P	1.00
5671.99	49.92	36.58	5.99	34.04	9.50	1.81	50.75	69.14	-18.39	A	1.00
8508.00	45.38	39.09	7.66	33.35	9.50	0.69	49.97	78.15	-28.18	P	1.00
8508.00	32.94	39.09	7.66	33.35	9.50	0.69	37.53	69.14	-31.61	A	1.00
* 12281.90	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14738.28	-----	-----	-----	-----	0.00	0.51	-----	-----	-----	-----	1.00
17194.66	-----	-----	-----	-----	0.00	0.58	-----	-----	-----	-----	1.00
* 19651.04	-----	-----	-----	-----	0.00	2.35	-----	-----	-----	-----	1.00
* 22107.42	-----	-----	-----	-----	0.00	0.70	-----	-----	-----	-----	1.00
24563.80	-----	-----	-----	-----	0.00	2.21	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 54Mbps.
10. The EUT can be bent and rotated vertically and horizontally to different direction. The emissions of the EUT oriented to different direction were prescanned and were found that the EUT in vertical direction has highest emission and the highest emissions were recorded as representative in final report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG
Report No. : ER04-07-022FRF
Page 39 of 58

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company :	GIGA-BYTE TECHNOLOGY CO., LTD.	Test Date :	2004/7/9
Product Name :	802.11 b+g USB STICK Wireless LAN Adapter	Test By:	Ken Tu
Model Name :	GN-WBKG	TEMP&Humidity :	25.1℃ , 67%

CH11 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2456.38	80.81	31.74	3.60	0.00	9.50	0.00	106.65	Fundamental Frequency		P	1.00
2456.38	71.64	31.74	3.60	0.00	9.50	0.00	97.48			A	1.00
* 2483.60	27.70	31.72	3.61	0.00	9.50	0.00	53.53	74	-20.47	P	1.00
* 2483.60	13.70	31.72	3.61	0.00	9.50	0.00	39.53	54	-14.47	A	1.00
* 2835.99	60.02	31.70	3.77	35.70	9.50	0.00	50.28	74	-23.72	P	1.00
* 2835.99	58.65	31.70	3.77	35.70	9.50	0.00	48.91	54	-5.09	A	1.00
5672.01	51.34	36.58	5.99	34.04	9.50	1.81	52.17	86.65	-34.48	P	1.00
5672.01	48.69	36.58	5.99	34.04	9.50	1.81	49.52	77.48	-27.96	A	1.00
8508.00	45.02	39.09	7.66	33.35	9.50	0.69	49.61	86.65	-37.04	P	1.00
8508.00	34.17	39.09	7.66	33.35	9.50	0.69	38.76	77.48	-38.72	A	1.00
* 12281.90	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14738.28	-----	-----	-----	-----	0.00	0.51	-----	-----	-----	-----	1.00
17194.66	-----	-----	-----	-----	0.00	0.58	-----	-----	-----	-----	1.00
* 19651.04	-----	-----	-----	-----	0.00	2.35	-----	-----	-----	-----	1.00
* 22107.42	-----	-----	-----	-----	0.00	0.70	-----	-----	-----	-----	1.00
24563.80	-----	-----	-----	-----	0.00	2.21	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means the Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 54Mbps.
10. The EUT can be bent and rotated vertically and horizontally to different direction. The emissions of the EUT oriented to different direction were prescanned and were found that the EUT in vertical direction has highest emission and the highest emissions were recorded as representative in final report.

3.7 Photos of Open Site





Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : JCK-GN-WBKG

Report No. : ER04-07-022FRF

Page 41 of 58





Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG
Report No. : ER04-07-022FRF
Page 42 of 58

4. 6dB BANDWIDTH MEASUREMENT


4.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2004

Note : 1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.2 Test Setup



4.3 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is $>500\text{KHz}$

4.4 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 10MHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 200\text{KHz}$.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG

Report No. : ER04-07-022FRF

Page 43 of 58

4.6 Test Results

Input Power (System)	5VDC (From USB interface of Notebook)	Environmental Conditions	25.6°C, 53%RH
Tested By	Ken Tu		

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	11.74	0.5	PASS
6	2437	11.62	0.5	PASS
11	2462	11.74	0.5	PASS

Note : 1. For 802.11b Mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	16.63	0.5	PASS
6	2437	16.59	0.5	PASS
11	2462	16.55	0.5	PASS

Note : 1. For 802.11g Mode



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBK G


Report No. : ER04-07-022FRF

Page 44 of 58


4.7 Photo of 6db Bandwidth Measurement

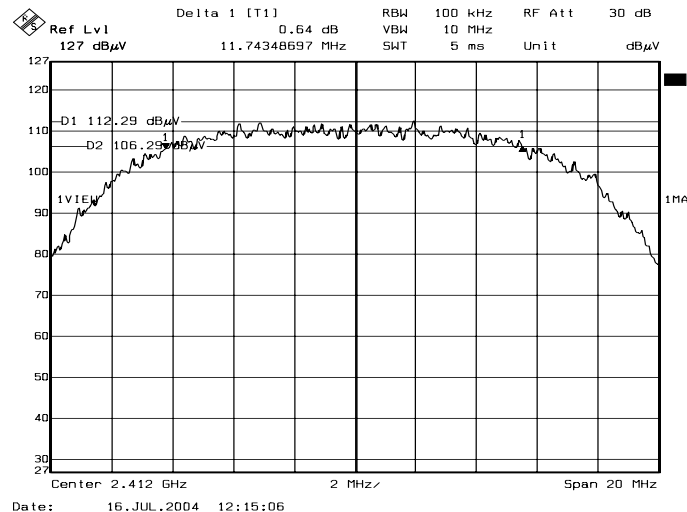

Channel 1

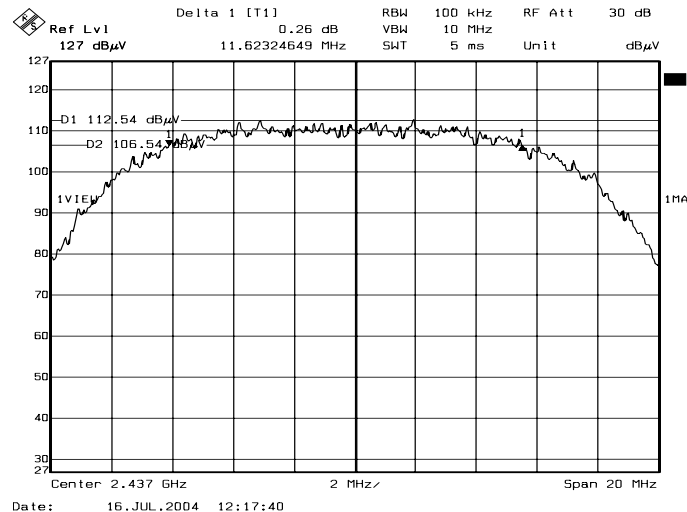

Channel 6

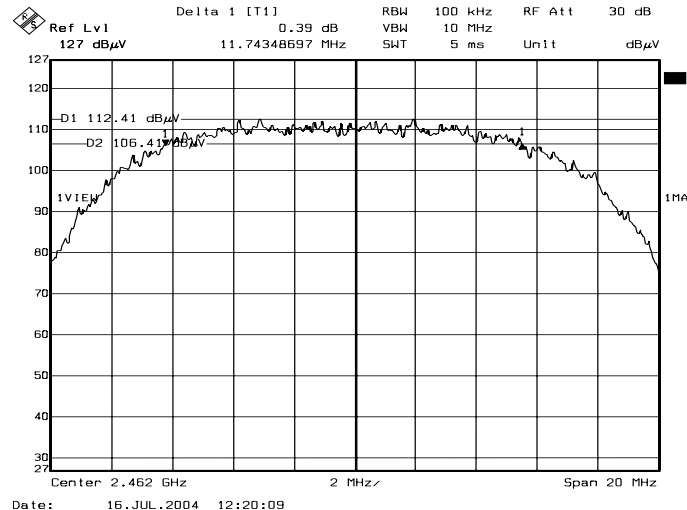

Channel 11

Note: For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720


FCC ID : JCK-GN-WBK G

Report No. : ER04-07-022FRF


Page 45 of 58

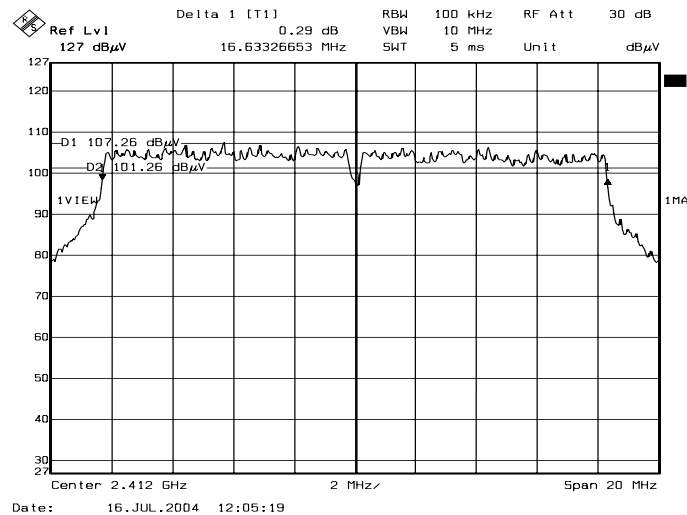

Channel 1

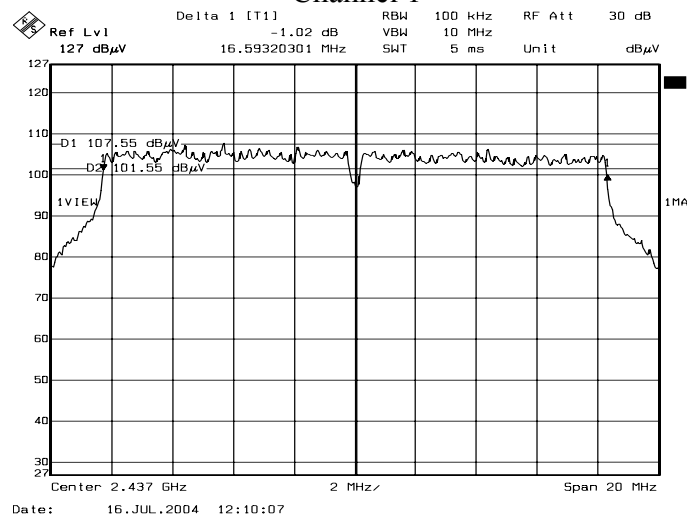

Channel 6

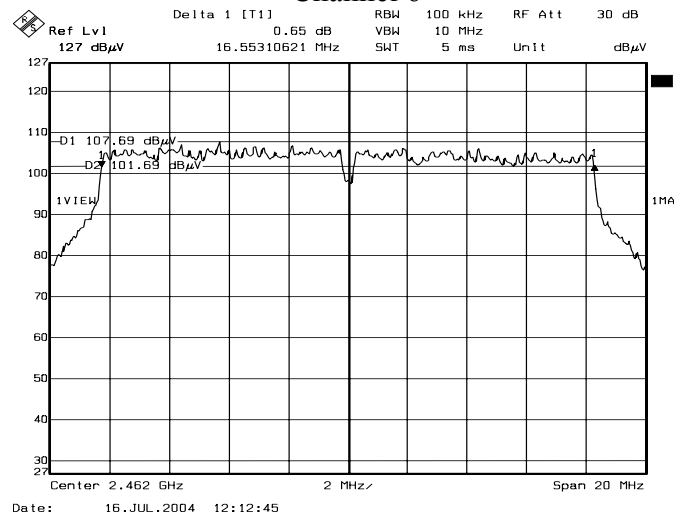

Channel 11

Note: For 802.11g Mode



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG

Report No. : ER04-07-022FRF

Page 46 of 58

5. MAXIMUM PEAK OUTPUT POWER


5.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2004
Agilent ATTENUATOR	8491B	57321	CAL. ON USE
GIGASTRONICS POWER METER	8542	1828329	September 19, 2003

Note : 1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.2 Test Setup



5.3 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

5.4 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency.

5.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

5.6 Test Results

Input Power (System)	5VDC (From USB interface of Notebook)	Environmental Conditions	25.6°C, 53%RH
Tested By	Ken Tu		

Channel	Channel Frequency (MHz)	Average Power Output (dBm)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
1	2412	17.89	19.81	30	PASS
6	2437	18.00	20.02	30	PASS
11	2462	18.05	20.27	30	PASS

- Note : 1. For 802.11b mode.
2. At final test to get the worst-case emission at 11Mbps.
3. Cable loss = 1dB, Attenuator = 10dB.
4. The results are calculated as the following equation :
Peak Power Output = Peak Power Reading + Cable loss + Attenuator

Channel	Channel Frequency (MHz)	Average Power Output (dBm)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
1	2412	14.21	20.32	30	PASS
6	2437	14.21	20.61	30	PASS
11	2462	14.12	20.83	30	PASS

- Note : 1. For 802.11g mode.
2. At final test to get the worst-case emission at 6Mbps.
3. Cable loss = 1dB, Attenuator = 10dB.
4. The results are calculated as the following equation :
Peak Power Output = Peak Power Reading + Cable loss + Attenuator

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG

Report No. : ER04-07-022FRF

Page 48 of 58

6. POWER SPECTRAL DENSITY MEASUREMENT


6.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2004

Note : 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

6.2 Test Setup



6.3 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3KHz.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG

Report No. : ER04-07-022FRF

Page 49 of 58

6.4 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3KHz RBW and 30KHz VBW, set sweep time=span / 3KHz.

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.

6.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

6.6 Test Results

Input Power (System)	5VDC (From USB interface of Notebook)	Environmental Conditions	25.6°C, 53%RH
Tested By	Ken Tu		

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
1	2412	-8.97	8	PASS
6	2437	-8.65	8	PASS
11	2462	-8.51	8	PASS

Note: For 11Mbps (802.11b mode) at final test to get the worst-case emission at 11Mbps.

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
1	2412	-15.47	8	PASS
6	2437	-14.53	8	PASS
11	2462	-14.91	8	PASS

Note: For 54Mbps (802.11g mode) at final test to get the worst-case emission at 54Mbps.



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG


Report No. : ER04-07-022FRF

Page 50 of 58


6.7 Photo of Power Spectral Density Measurement

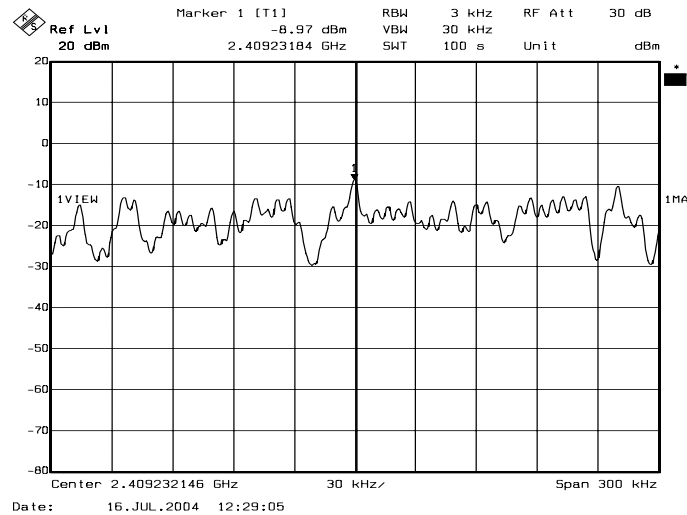

Channel 1

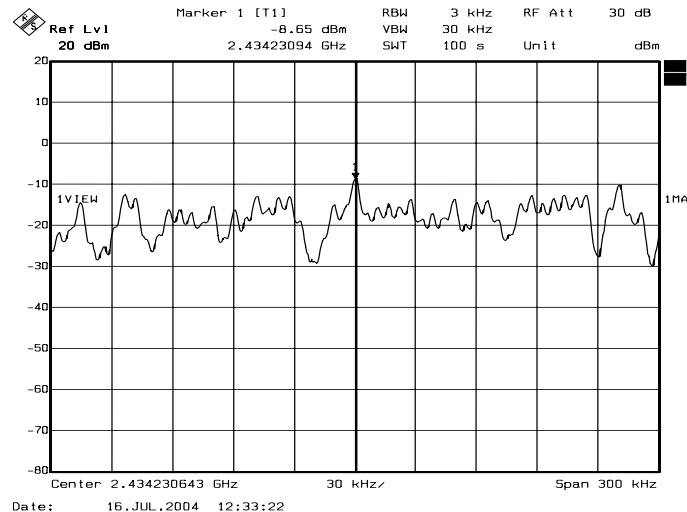

Channel 6

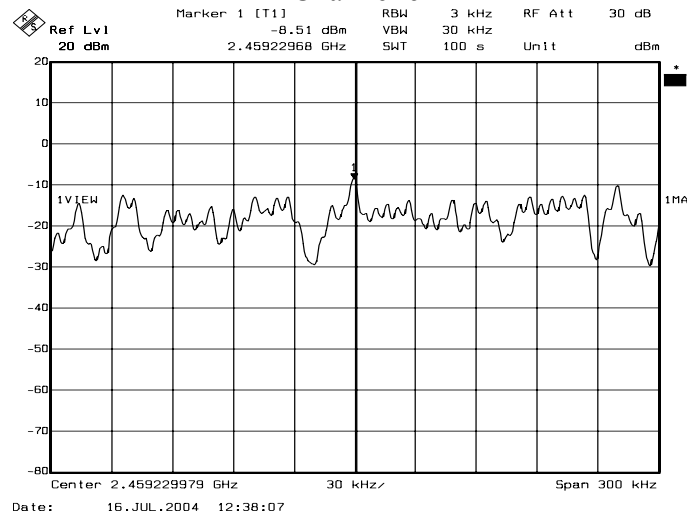

Channel 11

Note: For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720


FCC ID : JCK-GN-WBKG

Report No. : ER04-07-022FRF


Page 51 of 58

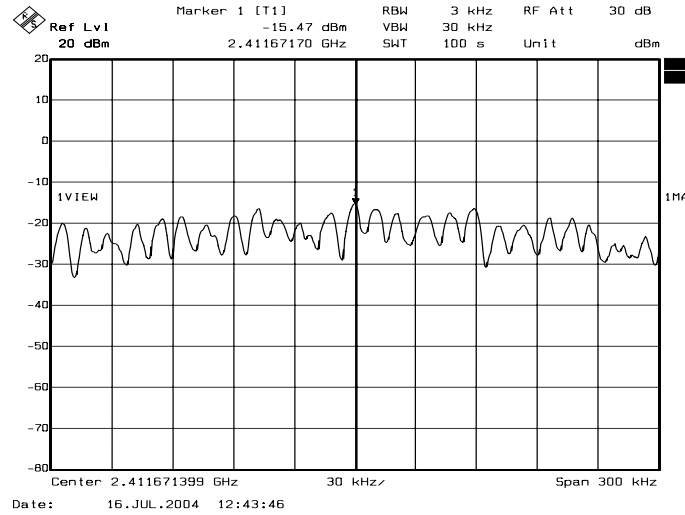

Channel 1

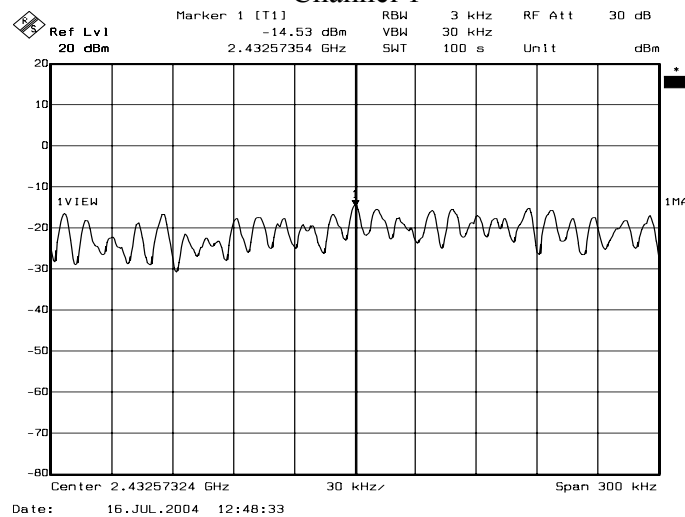

Channel 6

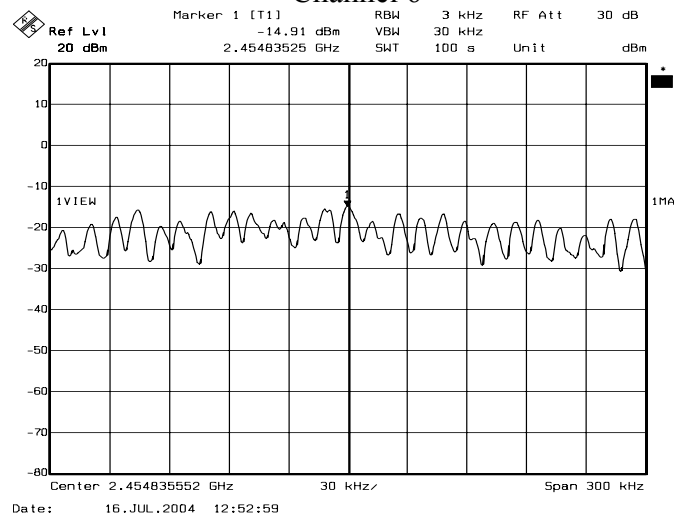

Channel 11

Note: For 802.11g Mode



7. BAND EDGE MEASUREMENT


7.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2004

Note :

1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

7.2 Test Setup



7.3 Limits of Band Edge Emissions Measurement

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

7.4 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer with suitable frequency span including 100KHz bandwidth from band edge. The band edges were measured and recorded.

7.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

7.6 Test Results

A. Conducted

Refer to 7.7 photo of out band Emission measurement

B. Radiated

Input Power (System)	5VDC (From USB interface of Notebook)	Environmental Conditions	25.6°C, 53%RH
Tested By	Ken Tu		

For 802.11b mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

Band edge Frequency (MHz)		Measured radiated band edge field strength (dBuV/m)		Radiated band edge field strength limit (dBuV/m)		Test result
		Horizontal	Vertical	Horizontal	Vertical	
2399.90	PK	63.07	73.37	80.19	90.49	PASS
	AV	55.00	65.31	73.31	89.01	
2483.50	PK	47.19	55.54	74.00	74.00	PASS
	AV	37.20	45.58	54.00	54.00	

For 802.11g mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

Band edge Frequency (MHz)		Measured radiated band edge field strength (dBuV/m)		Radiated band edge field strength limit (dBuV/m)		Test result
		Horizontal	Vertical	Horizontal	Vertical	
2399.90	PK	65.15	75.17	77.72	87.74	PASS
	AV	50.16	60.23	67.94	78.01	
2483.50	PK	53.80	62.30	74.00	74.00	PASS
	AV	36.15	44.49	54.00	54.00	

- Note :
1. Radiated band edge field strength is measured with FCC recommended mark-delta method.
 2. Measured radiated band edge field strength Test Results = Radiated fundamental emission field strength - DELTA.
 3. DELTA = Relative measurement between conducted measured peak level of fundamental emission and relevant band edge emission. Please refer to 7.7 photo of Band Edge Measurement.



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG


Report No. : ER04-07-022FRF

Page 54 of 58

7.7 Photo of Band edge Measurement

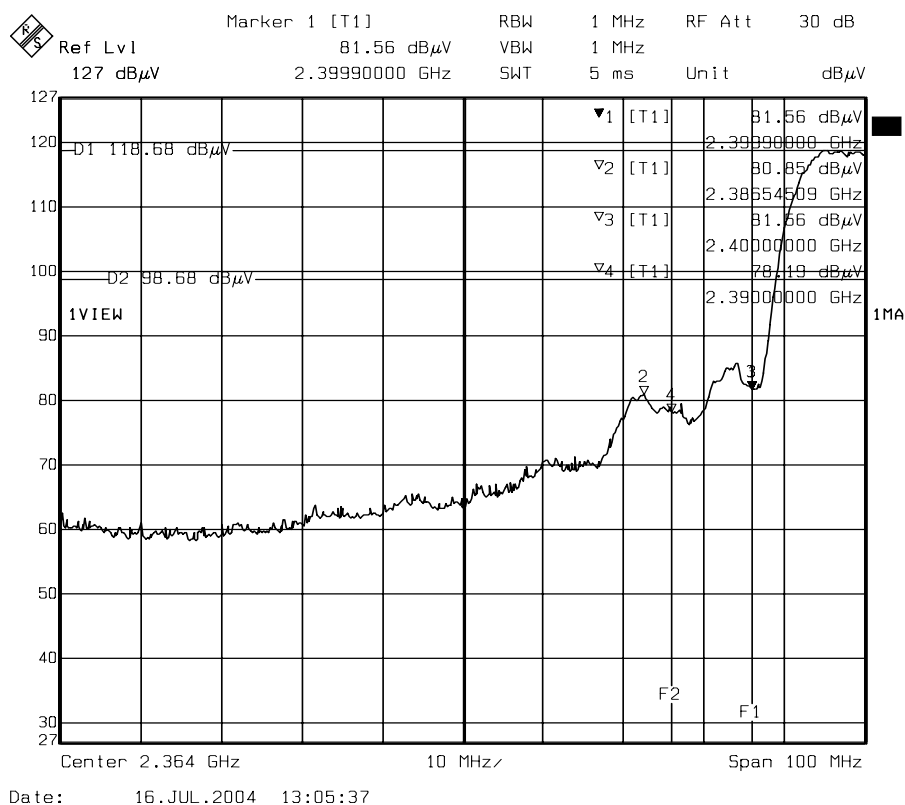

Lower Band edge (Peak)

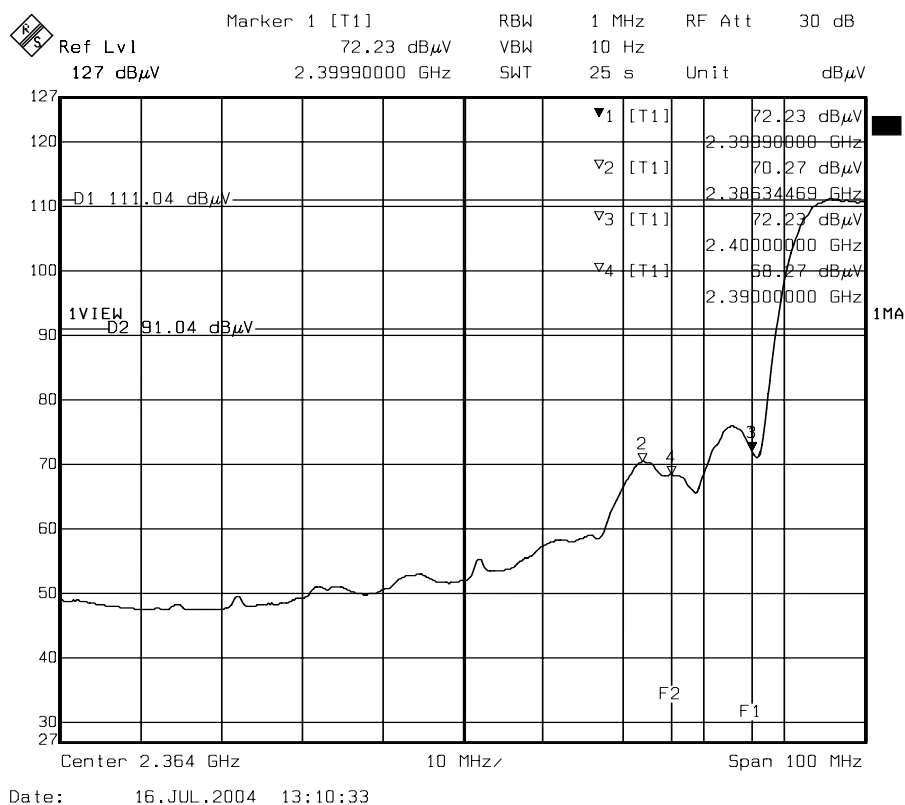

Lower Band edge (Average)

Note: For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : JCK-GN-WBKG


Report No. : ER04-07-022FRF

Page 55 of 58

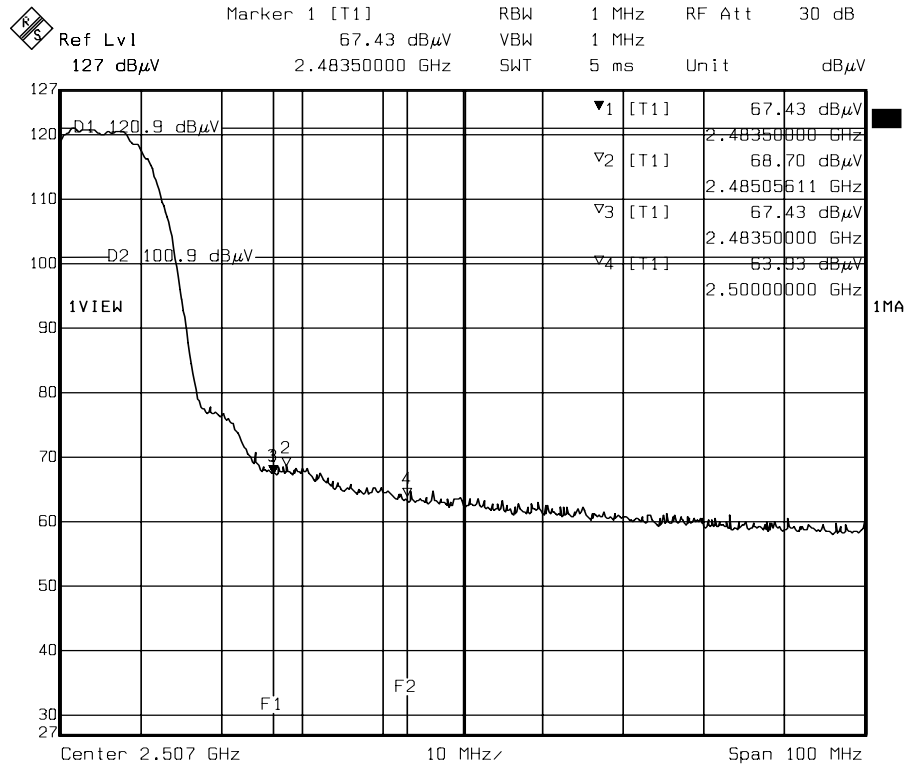

Date: 16.JUL.2004 13:31:08

Higher Band edge (Peak)

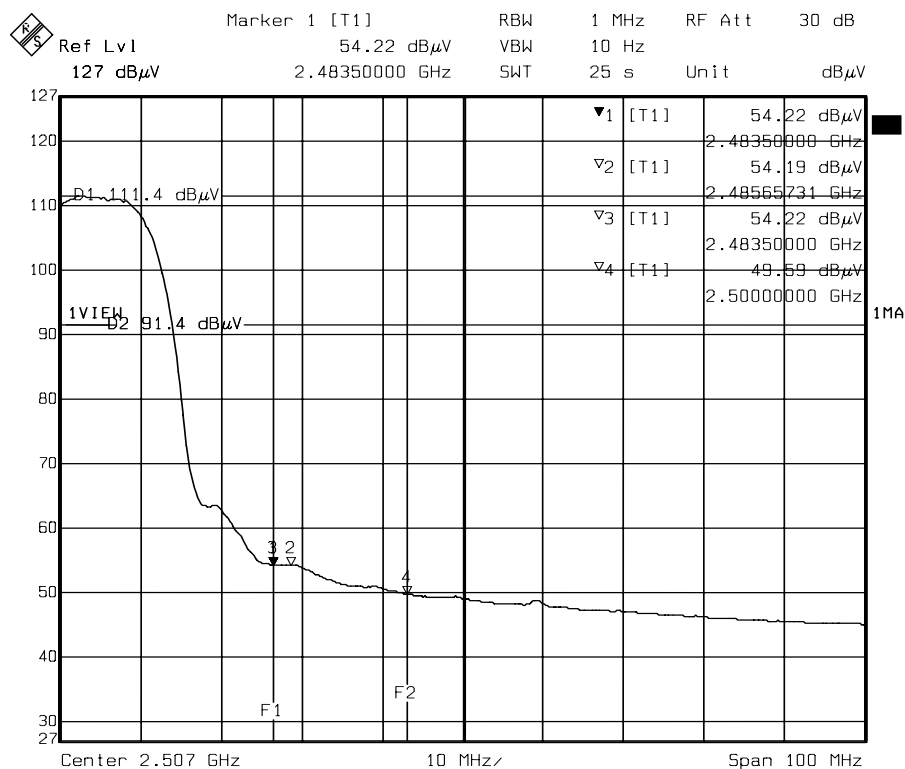

Date: 16.JUL.2004 13:28:03

Higher Band edge (Average)

Note: For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720


FCC ID : JCK-GN-WBKG

Report No. : ER04-07-022FRF

Page 56 of 58

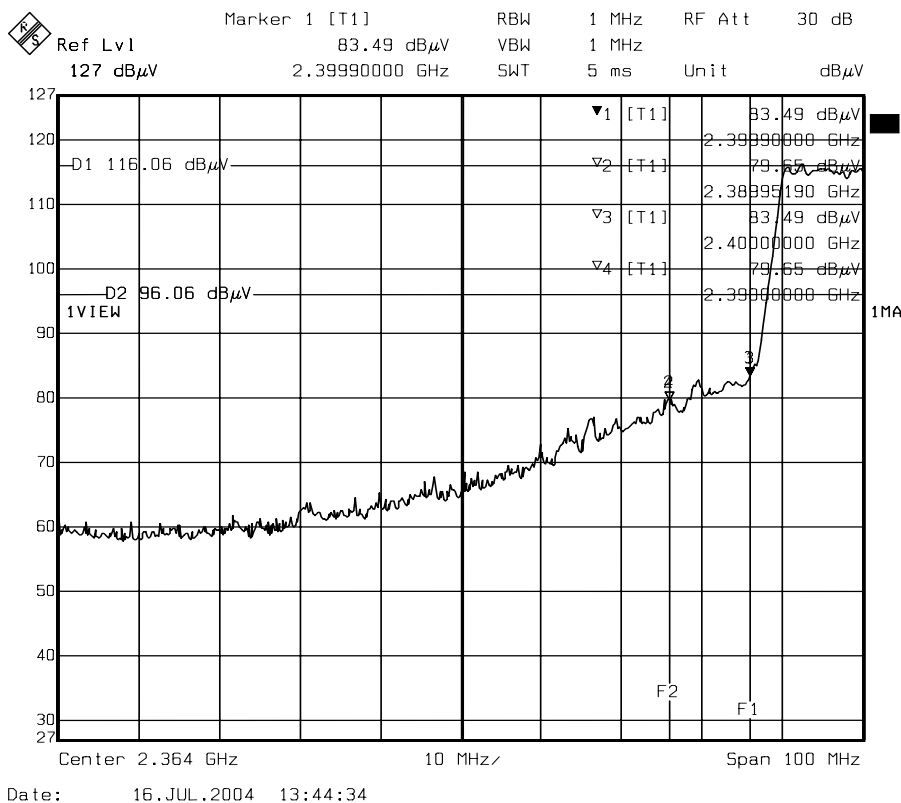

Lower Band edge (Peak)

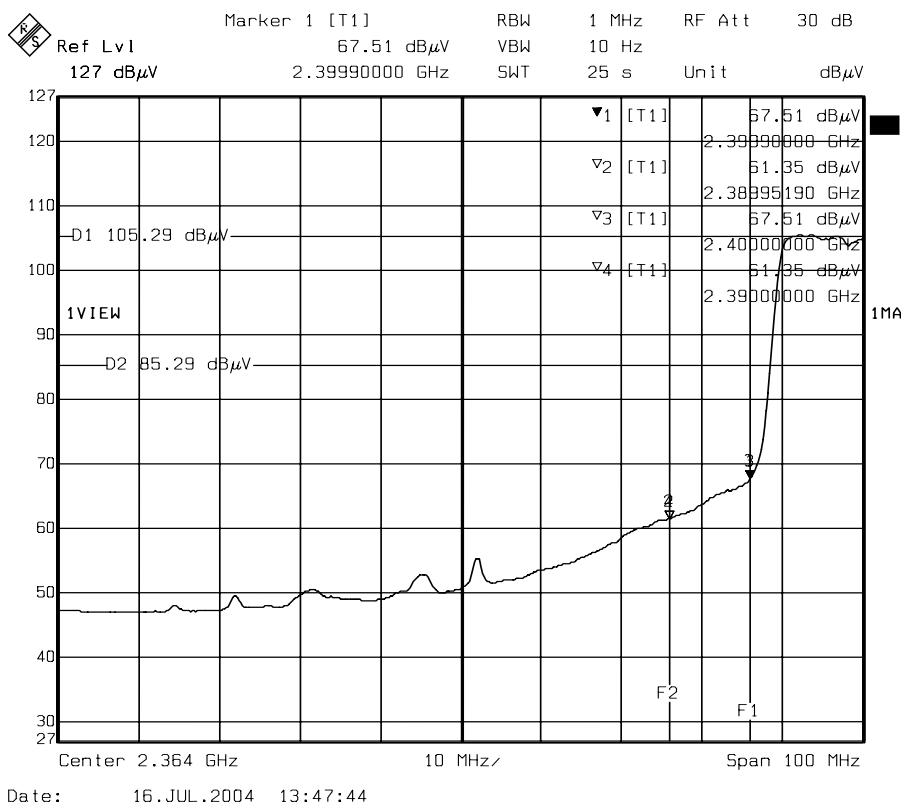

Lower Band edge (Average)

Note: For 802.11g Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720


FCC ID : JCK-GN-WBKG

Report No. : ER04-07-022FRF

Page 57 of 58

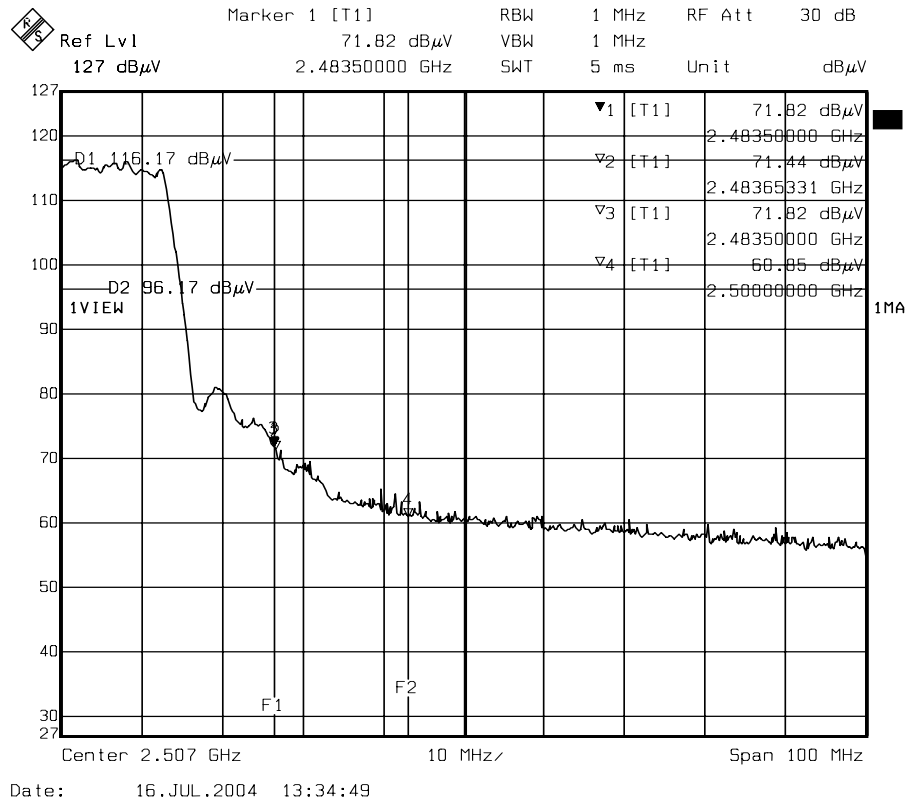

Higher Band edge (Peak)

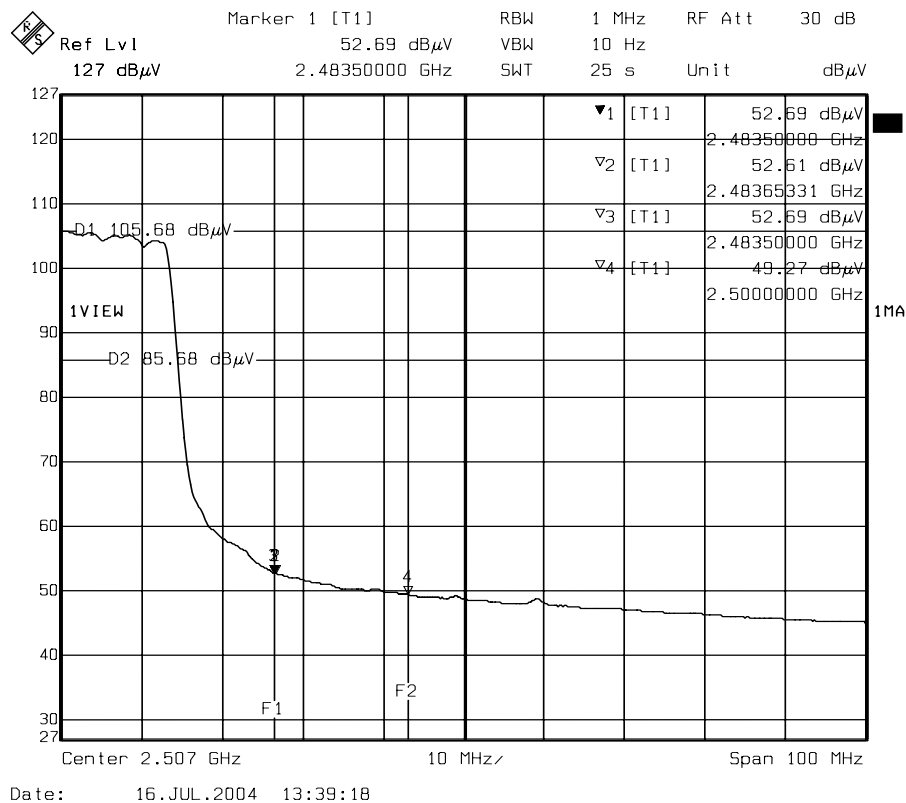

Higher Band edge (Average)

Note: For 802.11g Mode



8. ANTENNA REQUIREMENT

8.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.2 Antenna Connected Construction

The antenna used in this product is Chip antenna. The maximum Gain of this antenna is 2dBi.