



FCC TEST REPORT

REPORT NO.: RF911115R06

MODEL NO.: GN-WLBM101

RECEIVED: Oct. 15, 2002

TESTED: Oct. 16 ~ Dec. 2, 2002

APPLICANT: Giga-Byte Technology Co., Ltd.

ADDRESS: No. 6, Bau Chiang Road, Hsin-Tien, Taipei
Hsien, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 49 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Lab Code: 200102-0

Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS.....	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS.....	8
4	TEST TYPES AND RESULTS.....	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2	TEST INSTRUMENTS.....	9
4.1.3	TEST PROCEDURES	10
4.1.4	DEVIATION FROM TEST STANDARD	10
4.1.5	TEST SETUP.....	11
4.1.6	EUT OPERATING CONDITIONS	12
4.1.7	TEST RESULTS	13
4.2	RADIATED EMISSION MEASUREMENT	19
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	19
4.2.2	TEST INSTRUMENTS.....	20
4.2.3	TEST PROCEDURES	21
4.2.4	DEVIATION FROM TEST STANDARD	21
4.2.5	TEST SETUP	22
4.2.6	EUT OPERATING CONDITIONS	22
4.2.7	TEST RESULTS	23
4.3	6dB BANDWIDTH MEASUREMENT	27
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	27
4.3.2	TEST INSTRUMENTS.....	27
4.3.3	TEST PROCEDURE	28
4.3.4	DEVIATION FROM TEST STANDARD	28
4.3.5	TEST SETUP	28
4.3.6	EUT OPERATING CONDITIONS	28
4.3.7	TEST RESULTS	29
4.4	MAXIMUM PEAK OUTPUT POWER	33
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	33
4.4.2	INSTRUMENTS.....	33
4.4.3	TEST PROCEDURES	34
4.4.4	DEVIATION FROM TEST STANDARD	34
4.4.5	TEST SETUP	34
4.4.6	EUT OPERATING CONDITIONS	34
4.4.7	TEST RESULTS	35
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	36
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	36
4.5.2	TEST INSTRUMENTS.....	36

4.5.3	TEST PROCEDURE.....	37
4.5.4	DEVIATION FROM TEST STANDARD	37
4.5.5	TEST SETUP	37
4.5.6	EUT OPERATING CONDITION.....	37
4.5.7	TEST RESULTS	38
4.6	BAND EDGES MEASUREMENT.....	42
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	42
4.6.2	TEST INSTRUMENTS.....	42
4.6.3	TEST PROCEDURE.....	42
4.6.4	DEVIATION FROM TEST STANDARD	42
4.6.5	EUT OPERATING CONDITION.....	43
4.6.6	TEST RESULTS	43
4.7	ANTENNA REQUIREMENT.....	46
4.7.1	STANDARD APPLICABLE.....	46
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	46
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	47
6	INFORMATION ON THE TESTING LABORATORIES.....	49



1 CERTIFICATION

PRODUCT : 11Mbps USB Wireless LAN Adapter
BRAND NAME : GIGABYTE
MODEL NO. : GN-WLBM101
APPLICANT : Giga-Byte Technology Co., Ltd.
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Oct. 16, 2002 to Dec. 2, 2002. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

CHECKED BY : Emily Lu, DATE : Dec. 12, 2002
Emily Lu

APPROVED BY : Alan Lane, DATE : Dec. 12, 2002
Dr. Alan Lane, Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -13.22dBuV at 0.171MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -2.00dBuV at 2680.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	11Mbps USB Wireless LAN Adapter
MODEL NO.	GN-WLBM101
POWER SUPPLY	5.0VDC from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK
TRANSFER RATE	1/2/5.5/11Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	19.42dBm
ANTENNA TYPE	Printed Patch antenna
DATA CABLE	0.8m (Nonshielded)
I/O PORTS	USB port
ASSOCIATED DEVICES	NA

NOTE:

For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE: 1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
 2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a 11Mbps USB Wireless LAN Adapter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR 47 Part 15, Subpart C. (15.247)
ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP01L	TW-09C748-12800-19O-B220	FCC DOC APPROVED
2	PRINTER	EPSON	LQ-300+	DCGY017096	FCC DoC APPROVED
3	MODEM	ACEEX	1414	980020569	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 3, 2003
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	839135/006	July 2, 2003
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Nov. 29, 2003
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Nov. 29, 2003
EMCO-L.I.S.N. (for peripheral)	3825/2	9204-1964	July 2, 2003
Software	Cond-V2L	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C02.01	July 5, 2003
HP Terminator (For EMCO LISN)	11593A	E1-01-298	Feb. 20, 2003
HP Terminator (For EMCO LISN)	11593A	E1-01-299	Feb. 20, 2003
Shielded Room	Site 2	ADT-C02	NA
VCCI Site Registration No.	Site 2	C-240	NA

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. “*”: These equipment are used for conducted telecom port test only (if tested).
3. The test was performed in ADT Open Site No. 2.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

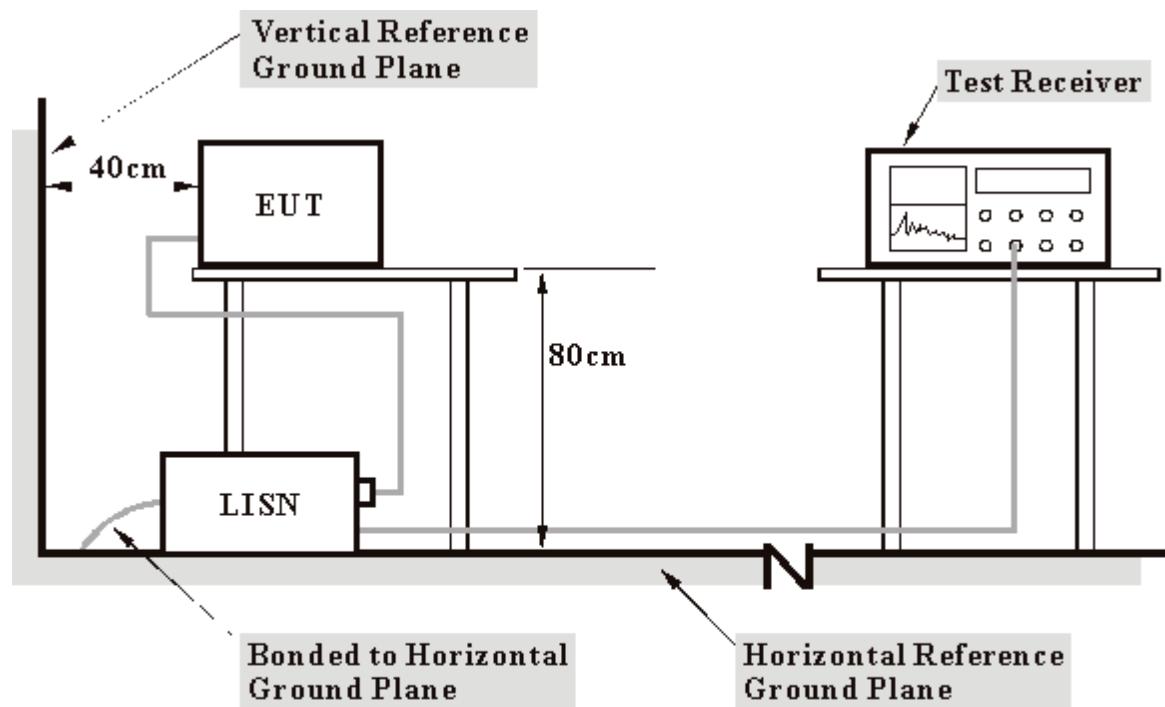

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


- a. Connected the EUT to a computer system placed on a testing table.
- b. The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system sent "H" messages to its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer, and the printer prints them on paper.

4.1.7 TEST RESULTS

EUT	11Mbps USB Wireless LAN Adapter	MODEL	GN-WLBM101
MODE	Channel 1	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	22deg. C, 52%RH, 1005 hPa		TESTED BY: Cody Chang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.172	0.10	49.01	-	49.11	-	64.87	54.87	-15.76	-
2	0.225	0.10	43.61	-	43.71	-	62.63	52.63	-18.92	-
3	0.284	0.10	37.91	-	38.01	-	60.69	50.69	-22.68	-
4	0.340	0.10	34.43	-	34.53	-	59.21	49.21	-24.68	-
5	3.578	0.26	31.61	-	31.87	-	56.00	46.00	-24.13	-
6	18.572	1.14	27.13	-	28.27	-	60.00	50.00	-31.73	-


REMARKS : 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

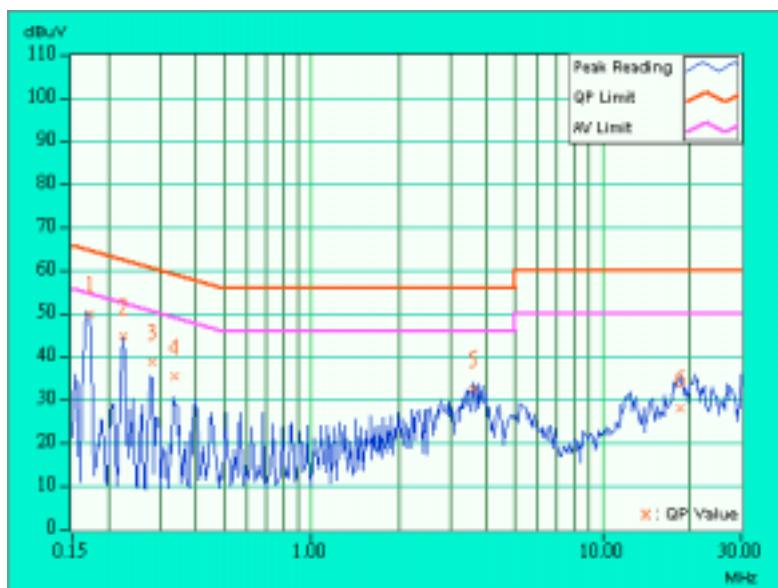

EUT	11Mbps USB Wireless LAN Adapter	MODEL	GN-WLBM101
MODE	Channel 1	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	22deg. C, 52%RH, 1005 hPa		TESTED BY: Cody Chang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.171	0.10	51.22	-	51.32	-	64.93	54.93	-13.61	-
2	0.225	0.10	44.21	-	44.31	-	62.63	52.63	-18.32	-
3	0.282	0.10	38.99	-	39.09	-	60.76	50.76	-21.67	-
4	0.339	0.10	36.06	-	36.16	-	59.23	49.23	-23.07	-
5	3.921	0.29	30.99	-	31.28	-	56.00	46.00	-24.72	-
6	21.539	1.06	27.49	-	28.55	-	60.00	50.00	-31.45	-


REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

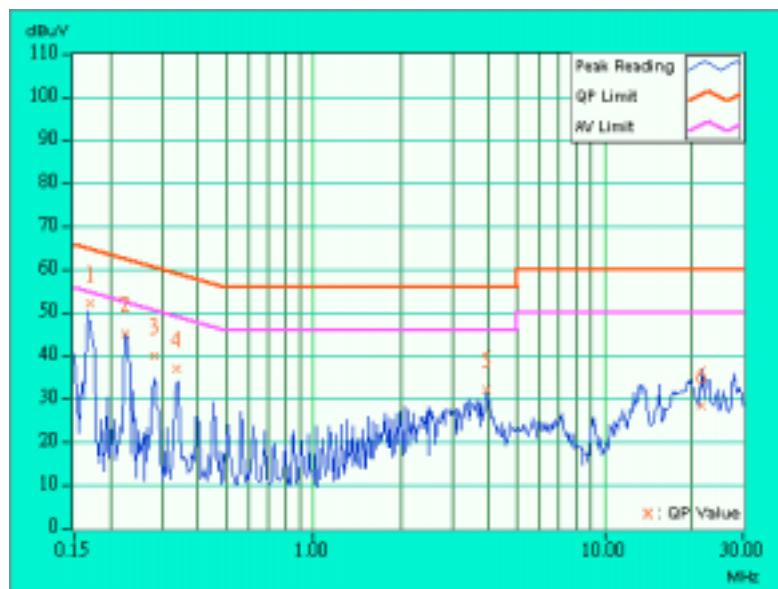

EUT	11Mbps USB Wireless LAN Adapter	MODEL	GN-WLBM101
MODE	Channel 6	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	22deg. C, 52%RH, 1005 hPa		TESTED BY: Cody Chang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.174	0.10	47.54	-	47.64	-	64.77	54.77	-17.13	-
2	0.228	0.10	43.69	-	43.79	-	62.52	52.52	-18.73	-
3	0.286	0.10	37.34	-	37.44	-	60.65	50.65	-23.21	-
4	0.342	0.10	34.87	-	34.97	-	59.15	49.15	-24.18	-
5	3.879	0.29	34.97	-	35.26	-	56.00	46.00	-20.74	-
6	20.696	1.21	30.65	-	31.86	-	60.00	50.00	-28.14	-


REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

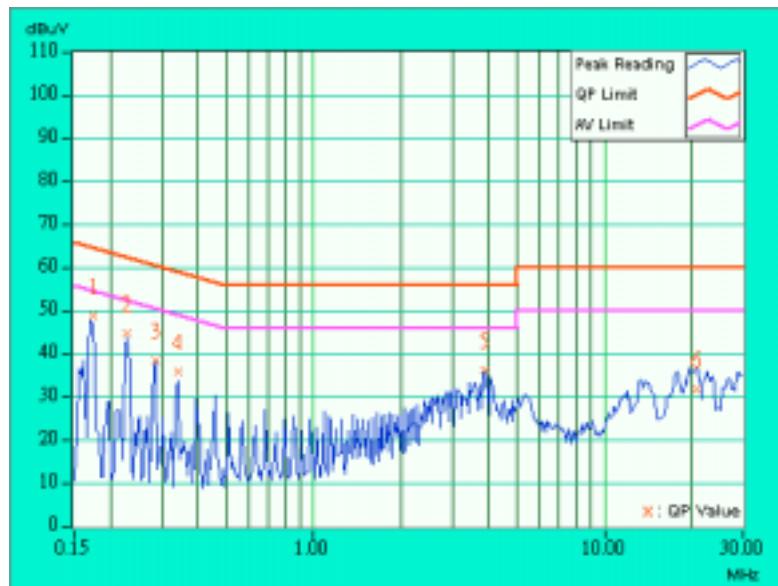

EUT	11Mbps USB Wireless LAN Adapter	MODEL	GN-WLBM101
MODE	Channel 6	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	22deg. C, 52%RH, 1005 hPa		TESTED BY: Cody Chang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.171	0.10	51.59	-	51.69	-	64.91	54.91	-13.22	-
2	0.228	0.10	46.00	-	46.10	-	62.52	52.52	-16.42	-
3	0.282	0.10	38.53	-	38.63	-	60.76	50.76	-22.13	-
4	0.339	0.10	36.62	-	36.72	-	59.23	49.23	-22.51	-
5	3.760	0.28	31.32	-	31.60	-	56.00	46.00	-24.40	-
6	20.657	1.03	31.38	-	32.41	-	60.00	50.00	-27.59	-


REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

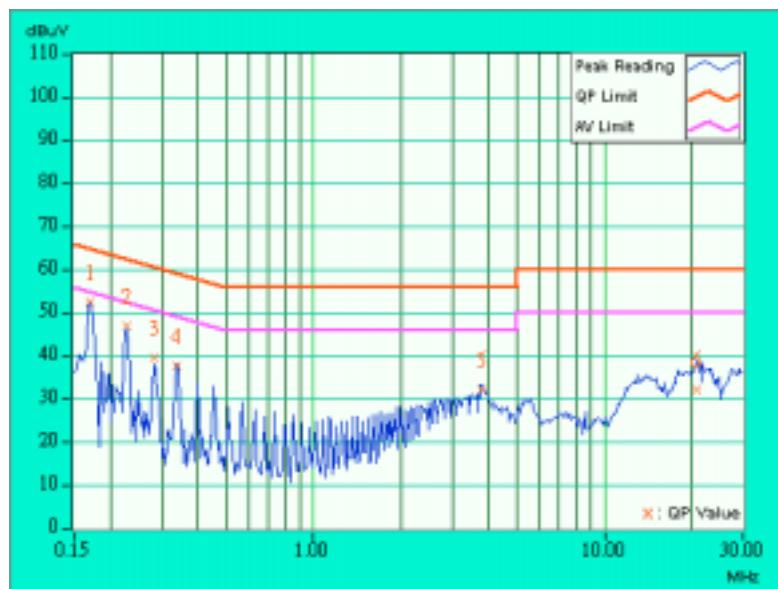

EUT	11Mbps USB Wireless LAN Adapter	MODEL	GN-WLBM101
MODE	Channel 11	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	22deg. C, 52%RH, 1005 hPa		TESTED BY: Cody Chang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.171	0.10	49.72	-	49.82	-	64.91	54.91	-15.09	-
2	0.228	0.10	43.47	-	43.57	-	62.52	52.52	-18.95	-
3	0.285	0.10	37.26	-	37.36	-	60.67	50.67	-23.31	-
4	0.344	0.10	33.99	-	34.09	-	59.10	49.10	-25.01	-
5	3.939	0.29	30.39	-	30.68	-	56.00	46.00	-25.32	-
6	21.137	1.22	28.34	-	29.56	-	60.00	50.00	-30.44	-


REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

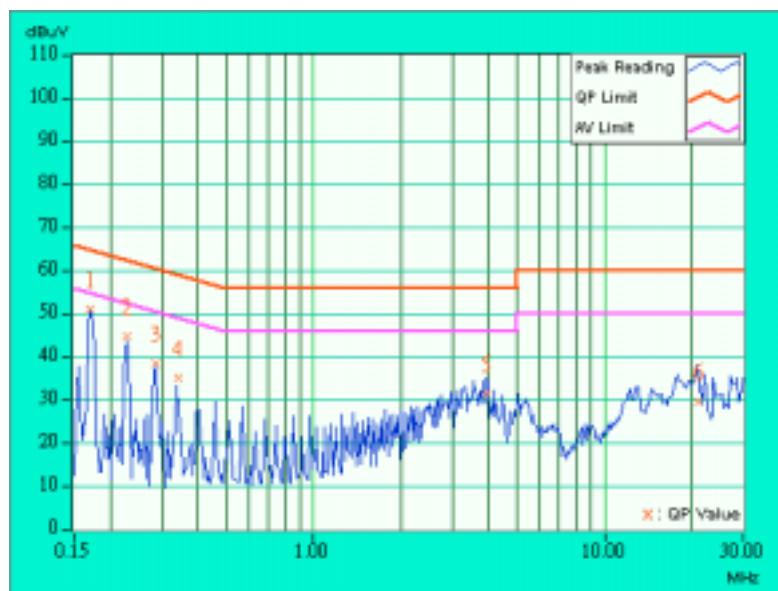

EUT	11Mbps USB Wireless LAN Adapter	MODEL	GN-WLBM101
MODE	Channel 11	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	22deg. C, 52%RH, 1005 hPa		TESTED BY: Cody Chang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.171	0.10	50.94	-	51.04	-	64.91	54.91	-13.87	-
2	0.231	0.10	43.85	-	43.95	-	62.41	52.41	-18.46	-
3	0.285	0.10	38.77	-	38.87	-	60.67	50.67	-21.80	-
4	0.456	0.10	31.78	-	31.88	-	56.77	46.77	-24.89	-
5	3.774	0.28	31.06	-	31.34	-	56.00	46.00	-24.66	-
6	20.477	1.02	31.32	-	32.34	-	60.00	50.00	-27.66	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

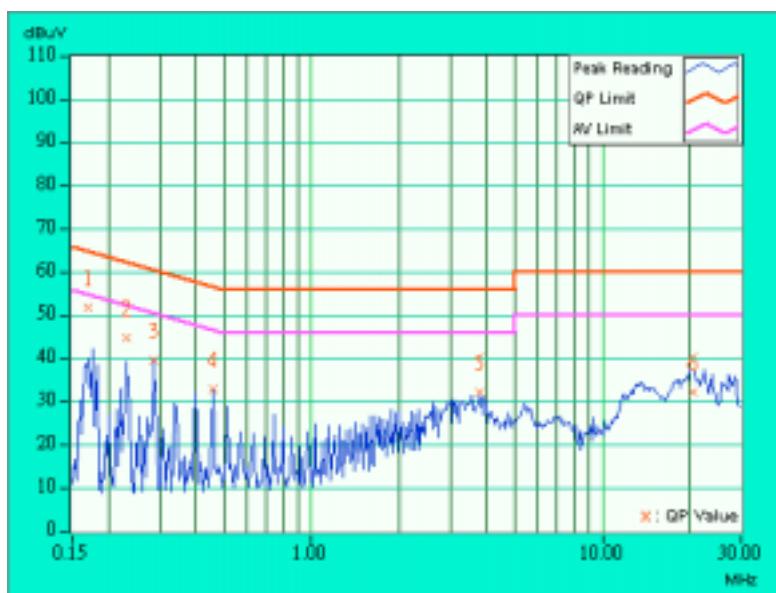

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	May 13, 2003
* HP Preamplifier	8447D	2944A08485	Apr. 29, 2003
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 07, 2003
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 27, 2003
SCHAFFNER Tunable Dipole Antenna SCHWARZBECK Tunable Dipole Antenna	VHBA 9123 UHA 9105	459 977	Nov. 22, 2003
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 02, 2003
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	Jul. 03, 2003
* EMCO Horn Antenna	3115	9312-4192	Apr. 09, 2003
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	AS61D4	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Jan. 25, 2003
* TIMES RF cable	LMR-600	CABLE-ST5-01	Jul. 12, 2003
Open Field Test Site	Site 5	ADT-R05	Jul. 19, 2003
VCCI Site Registration No.	Site 5	R-1039	NA
Site Registration No.	FCC: 90422 Canada IC: IC 3789 VCCI: R-1039		

NOTE:

1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. “*” = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 5.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

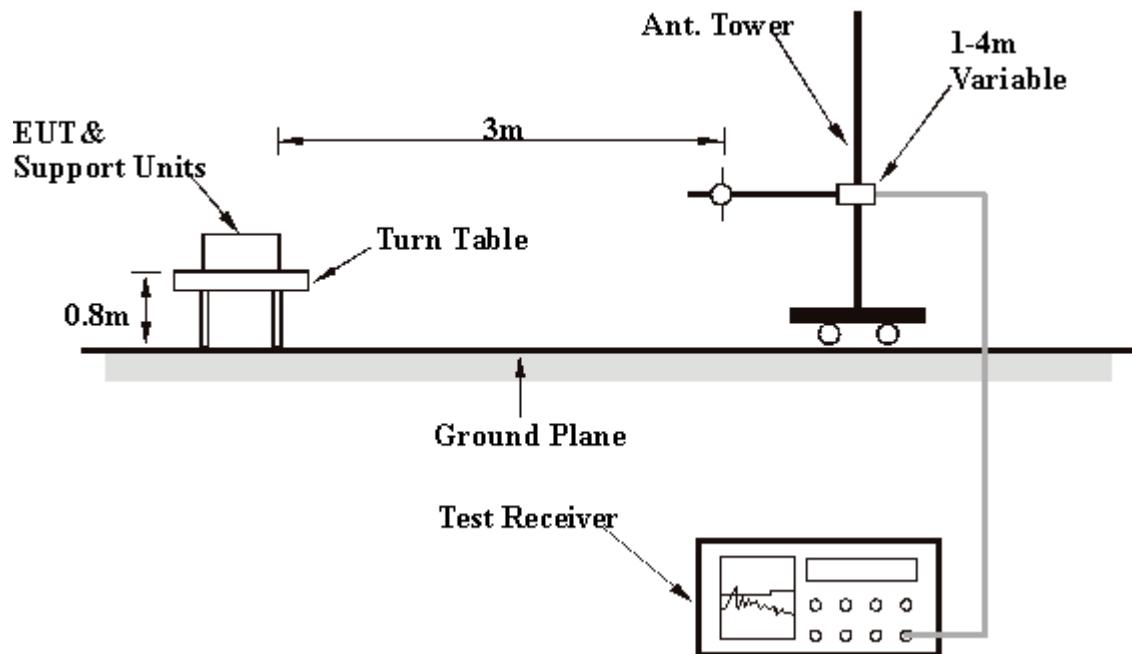

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS

EUT	11Mbps USB Wireless LAN Adapter	MODEL	GN-WLBM101
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Cody Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	216.00	25.0 QP	43.50	-18.50	1.15H	15	10.75	9.97	4.28	0.00	-14.25
2	220.00	29.4 QP	46.00	-16.60	1.46H	207	14.98	10.12	4.30	0.00	-14.42
3	228.00	31.8 QP	46.00	-14.20	1.44H	119	16.69	10.69	4.41	0.00	-15.11
4	240.00	35.4 QP	46.00	-10.60	1.03H	133	19.44	11.41	4.55	0.00	-15.96
5	336.00	27.5 QP	46.00	-18.50	1.30H	109	8.05	13.92	5.53	0.00	-19.46
6	352.00	30.5 QP	46.00	-15.50	1.29H	115	10.46	14.31	5.73	0.00	-20.04
7	360.00	37.0 QP	46.00	-9.00	1.02H	122	16.62	14.58	5.80	0.00	-20.38
8	396.00	34.2 QP	46.00	-11.80	1.00H	284	12.11	15.96	6.13	0.00	-22.09
9	528.00	30.1 QP	46.00	-15.90	1.61H	158	5.47	17.62	7.00	0.00	-24.64
10	748.00	30.0 QP	46.00	-16.00	1.47H	226	1.11	20.14	8.75	0.00	-28.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	120.00	26.5 QP	43.50	-17.00	1.45V	142	11.60	11.65	3.25	0.00	-14.90
2	220.00	27.5 QP	46.00	-18.50	1.19V	288	13.08	10.12	4.30	0.00	-14.42
3	240.00	31.0 QP	46.00	-15.00	1.00V	232	15.04	11.41	4.55	0.00	-15.96
4	360.00	34.0 QP	46.00	-12.00	1.32V	3	13.62	14.58	5.80	0.00	-20.38
5	396.00	27.0 QP	46.00	-19.00	1.17V	2	4.91	15.96	6.13	0.00	-22.09.
6	432.00	30.0 QP	46.00	-16.00	1.54V	193	7.29	16.28	6.43	0.00	-22.72
7	528.00	28.5 QP	46.00	-17.50	1.64V	172	3.87	17.62	7.00	0.00	-24.64
8	624.00	30.1 QP	46.00	-15.90	1.04V	94	3.19	18.91	8.01	0.00	-26.91
9	748.00	29.0 QP	46.00	-17.00	1.33V	116	0.11	20.14	8.75	0.00	-28.90

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
2. Correction Factor(dB) = Pre-Amplifier Factor (dB) - Antenna Factor (dB) - Cable Factor (dB)
3. Pre-Amplifier Factor (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
4. The other emission levels were very low against the limit.
5. Margin value = Emission level – Limit value.



EUT	11Mbps USB Wireless LAN Adapter	MODEL	GN-WLBM101
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Cody Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2038.00	50.0 PK	74.00	-24.00	1.30H	288	59.00	26.37	1.38	36.80	9.05
2	*2412.00	109.5 PK			1.23H	272	79.30	27.67	2.53	0	-30.20
3	*2412.00	107.5 AV			1.23H	272	77.30	27.67	2.53	0	-30.20
4	2580.00	74.3 AV	87.50	-13.20	1.18H	258	80.00	28.10	2.89	36.73	5.74
5	2580.00	78.3 PK	89.50	-11.20	1.18H	258	84.00	28.10	2.89	36.73	5.74
6	4076.00	46.0 PK	74.00	-28.00	1.22H	222	48.50	30.38	3.63	36.52	2.51
7	4824.00	46.8 PK	74.00	-27.20	1.19H	168	48.00	31.52	4.01	36.70	1.18
8	7236.00	56.8 PK	74.00	-17.20	1.26H	156	52.00	36.20	5.58	37.00	-4.78
9	7236.00	50.8 AV	54.00	-3.20	1.26H	156	46.00	36.20	5.58	37.00	-4.78

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2038.00	48.0 PK	74.00	-26.00	1.00V	349	57.00	26.37	1.38	36.80	9.05
2	2386.00	43.5 PK	74.00	-30.50	1.44V	115	50.00	27.67	2.53	0	-30.20
3	*2412.00	103.0 PK			1.47V	38	72.80	27.67	2.53	0	-30.20
4	*2412.00	98.5 AV			1.47V	38	68.30	27.67	2.53	36.72	6.52
5	2580.00	69.3 PK	83.00	-13.70	1.49V	89	75.00	28.10	2.89	36.73	5.74
6	2580.00	66.3 AV	78.50	-12.20	1.49V	89	72.00	28.10	2.89	36.73	5.74
7	4076.00	42.3 PK	74.00	-31.70	1.23V	322	44.80	30.38	3.63	36.52	2.51
8	4824.00	43.8 PK	74.00	-30.20	1.28V	260	45.00	31.52	4.01	36.70	1.18
9	7236.00	50.0 AV	54.00	-4.00	1.04V	18	45.20	36.20	5.58	37.00	-4.79
10	7236.00	57.6 PK	74.00	-16.40	1.04V	18	52.80	36.20	5.58	37.00	-4.78

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
2. Correction Factor(dB) = Pre-Amplifier Factor (dB) - Antenna Factor (dB) - Cable Factor (dB)
3. Pre-Amplifier Factor (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
4. The other emission levels were very low against the limit.
5. Margin value = Emission level – Limit value.
6. “*” = Fundamental frequency



EUT	11Mbps USB Wireless LAN Adapter	MODEL	GN-WLBM101
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Cody Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2063.00	48.2 PK	74.00	-25.80	1.18H	109	57.00	26.51	1.51	36.79	8.77
2	*2437.00	107.3 PK			1.15H	28	76.83	27.81	2.66	0	-30.47
3	*2437.00	104.8 AV			1.15H	28	74.33	27.81	2.66	0	-30.47
4	2630.00	64.3 AV	84.80	-20.50	1.12H	43	70.00	28.16	2.93	36.75	5.65
5	2630.00	66.3 PK	87.30	-21.00	1.12H	43	72.00	28.16	2.93	36.75	5.65
6	4126.00	40.6 PK	74.00	-33.40	1.33H	281	43.00	30.50	3.66	36.56	2.39
7	4874.00	44.0 PK	74.00	-30.00	1.19H	3	45.10	31.59	4.03	36.70	1.08
8	7312.00	48.8 AV	54.00	-5.20	1.45H	172	43.80	36.33	5.72	37.03	-5.02
9	7312.00	55.1 PK	74.00	-18.90	1.45H	172	50.11	36.33	5.72	37.03	-5.02.

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2063.00	46.2 PK	74.00	-27.80	1.03V	13	55.00	26.51	1.51	36.79	8.77
2	*2437.00	98.8 AV			1.55V	357	71.73	27.81	2.66	0	-30.47
3	*2437.00	102.2 PK			1.55V	357	68.33	27.81	2.66	0	-30.47
4	2630.00	63.3 PK	82.20	-18.90	1.40V	3	69.00	28.16	2.93	36.75	5.65
5	2630.00	59.9 AV	78.80	-18.90	1.40V	3	65.60	28.16	2.93	36.75	5.65
6	4126.00	41.6 PK	74.00	-32.40	1.06V	38	44.00	30.50	3.66	36.56	2.39
7	4874.00	44.9 PK	74.00	-29.10	1.20V	95	46.00	31.59	4.03	36.70	1.09
8	7310.00	48.9 AV	54.00	-5.10	1.75V	326	44.00	36.26	5.65	37.02	-4.90
9	7310.00	54.9 PK	74.00	-19.10	1.75V	326	50.00	36.26	5.65	37.02	-4.90.

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
2. Correction Factor(dB) = Pre-Amplifier Factor (dB) - Antenna Factor (dB) - Cable Factor (dB)
3. Pre-Amplifier Factor (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
4. The other emission levels were very low against the limit.
5. Margin value = Emission level – Limit value.
6. “ * ” = Fundamental frequency



EUT	11Mbps USB Wireless LAN Adapter	MODEL	GN-WLBM101
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 1005 hPa	TESTED BY: Cody Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2088.00	48.5 PK	74.00	-25.50	1.16H	91	57.00	26.66	1.64	36.78	8.49
2	*2463.00	102.8 AV			1.03H	353	72.33	27.81	2.66	0	-30.47
3	*2463.00	104.8 PK			1.03H	353	74.33	27.81	2.66	0	-30.47
4	2494.00	46.0 PK	74.00	-28.00	1.03H	350	52.00	27.96	2.78	36.70	5.96
5	2680.00	56.5 PK	74.00	-17.50	1.10H	77	62.00	28.28	3.02	36.78	5.49
6	2680.00	52.0 AV	54.00	-2.00	1.10H	77	57.50	28.28	3.02	36.78	5.49
7	4924.00	45.2 PK	74.00	-28.80	1.46H	126	46.20	31.66	4.06	36.70	0.99
8	7387.00	50.1 PK	74.00	-23.90	1.53H	275	45.00	36.40	5.79	37.05	-5.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2088.00	46.5 PK	74.00	-27.50	1.04V	3	55.00	26.66	1.64	36.78	8.49
2	*2463.00	101.8 AV			1.00V	40	71.33	27.81	2.66	0	-30.47
3	*2463.00	103.8 PK			1.00V	40	73.33	27.81	2.66	0	-30.47
4	2680.00	48.5 PK	74.00	-25.50	1.00V	146	54.00	28.28	3.02	36.78	5.48
5	4176.00	42.7 PK	74.00	-31.30	1.26V	3	45.00	30.56	3.68	36.58	2.33
6	4924.00	45.0 PK	74.00	-29.00	1.03V	17	46.00	31.66	4.06	36.70	0.99
7	7387.00	51.3 PK	74.00	-22.70	1.03V	218	46.20	36.40	5.79	37.05	-5.14

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
2. Correction Factor(dB) = Pre-Amplifier Factor (dB) - Antenna Factor (dB) - Cable Factor (dB)
3. Pre-Amplifier Factor (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
4. The other emission levels were very low against the limit.
5. Margin value = Emission level – Limit value.
6. “ * “ = Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

Notes: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

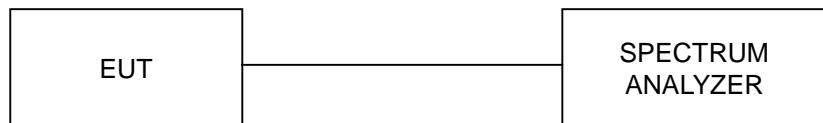

4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS


EUT	11Mbps USB Wireless LAN Adapter	MODEL	GN-WLBM101
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH, 1005 hPa
TESTED BY: Ansen Lei			

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	10.14	0.5	PASS
6	2437	10.14	0.5	PASS
11	2462	10.14	0.5	PASS


CH1

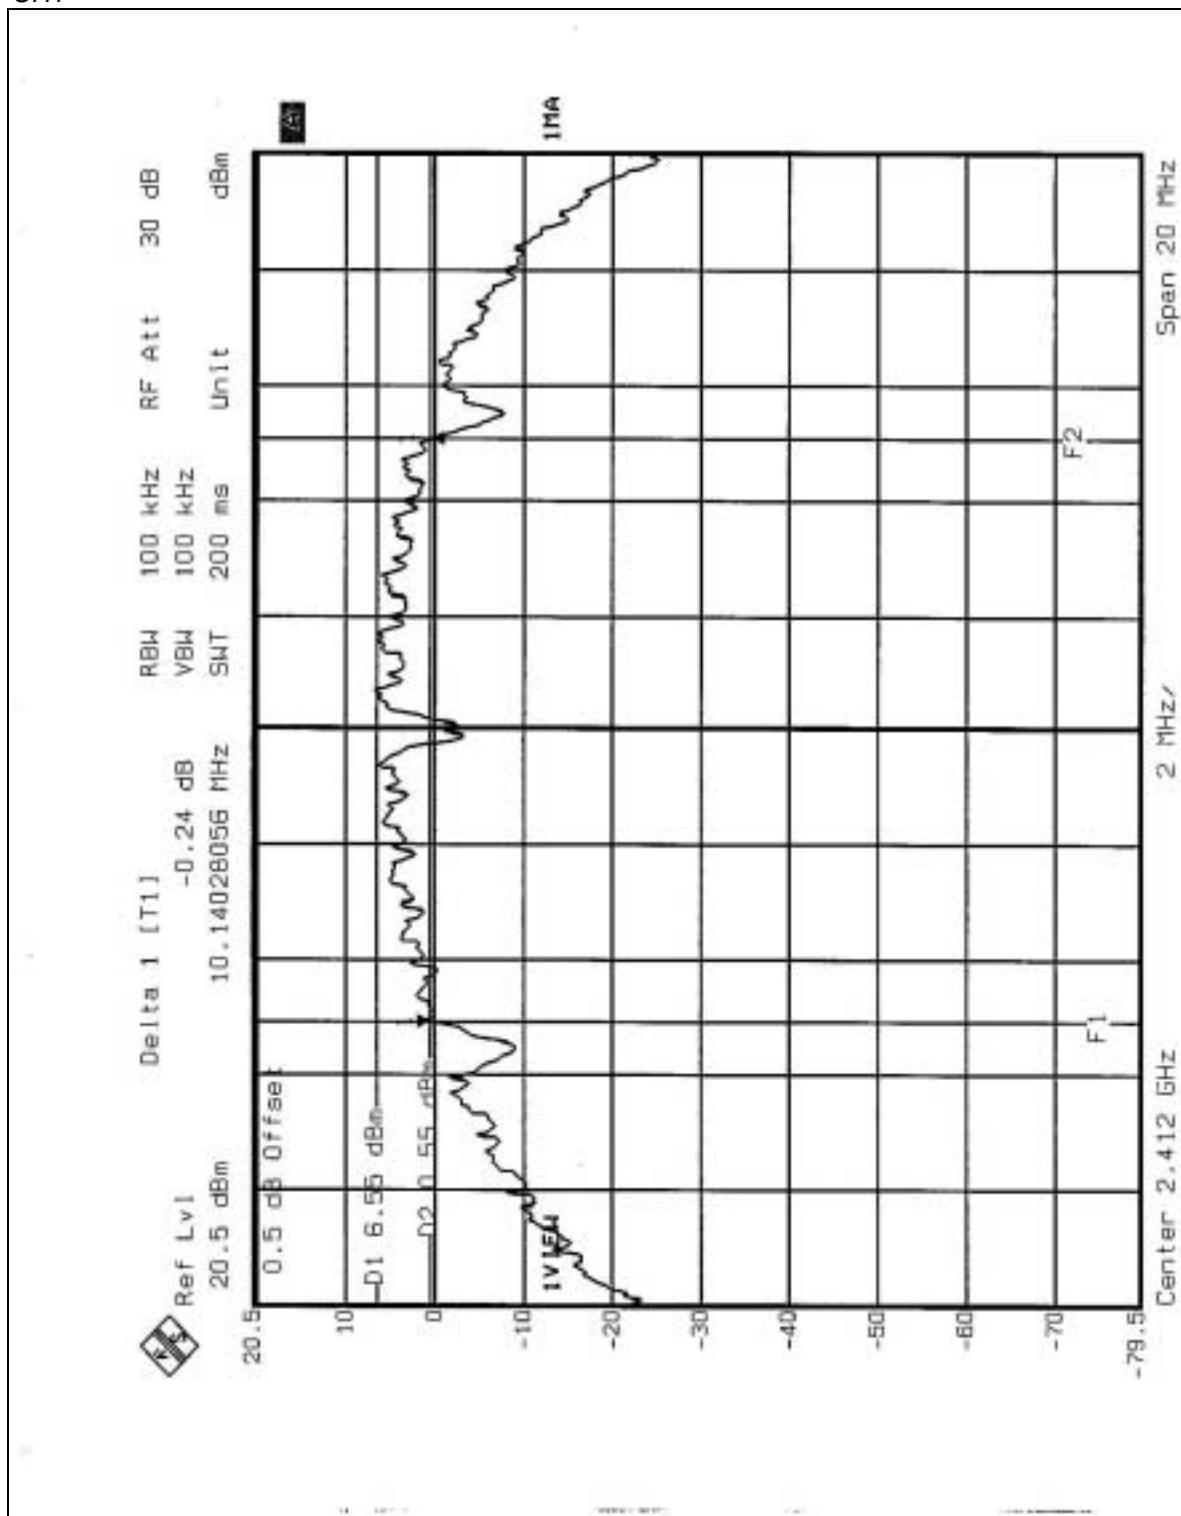

CH6

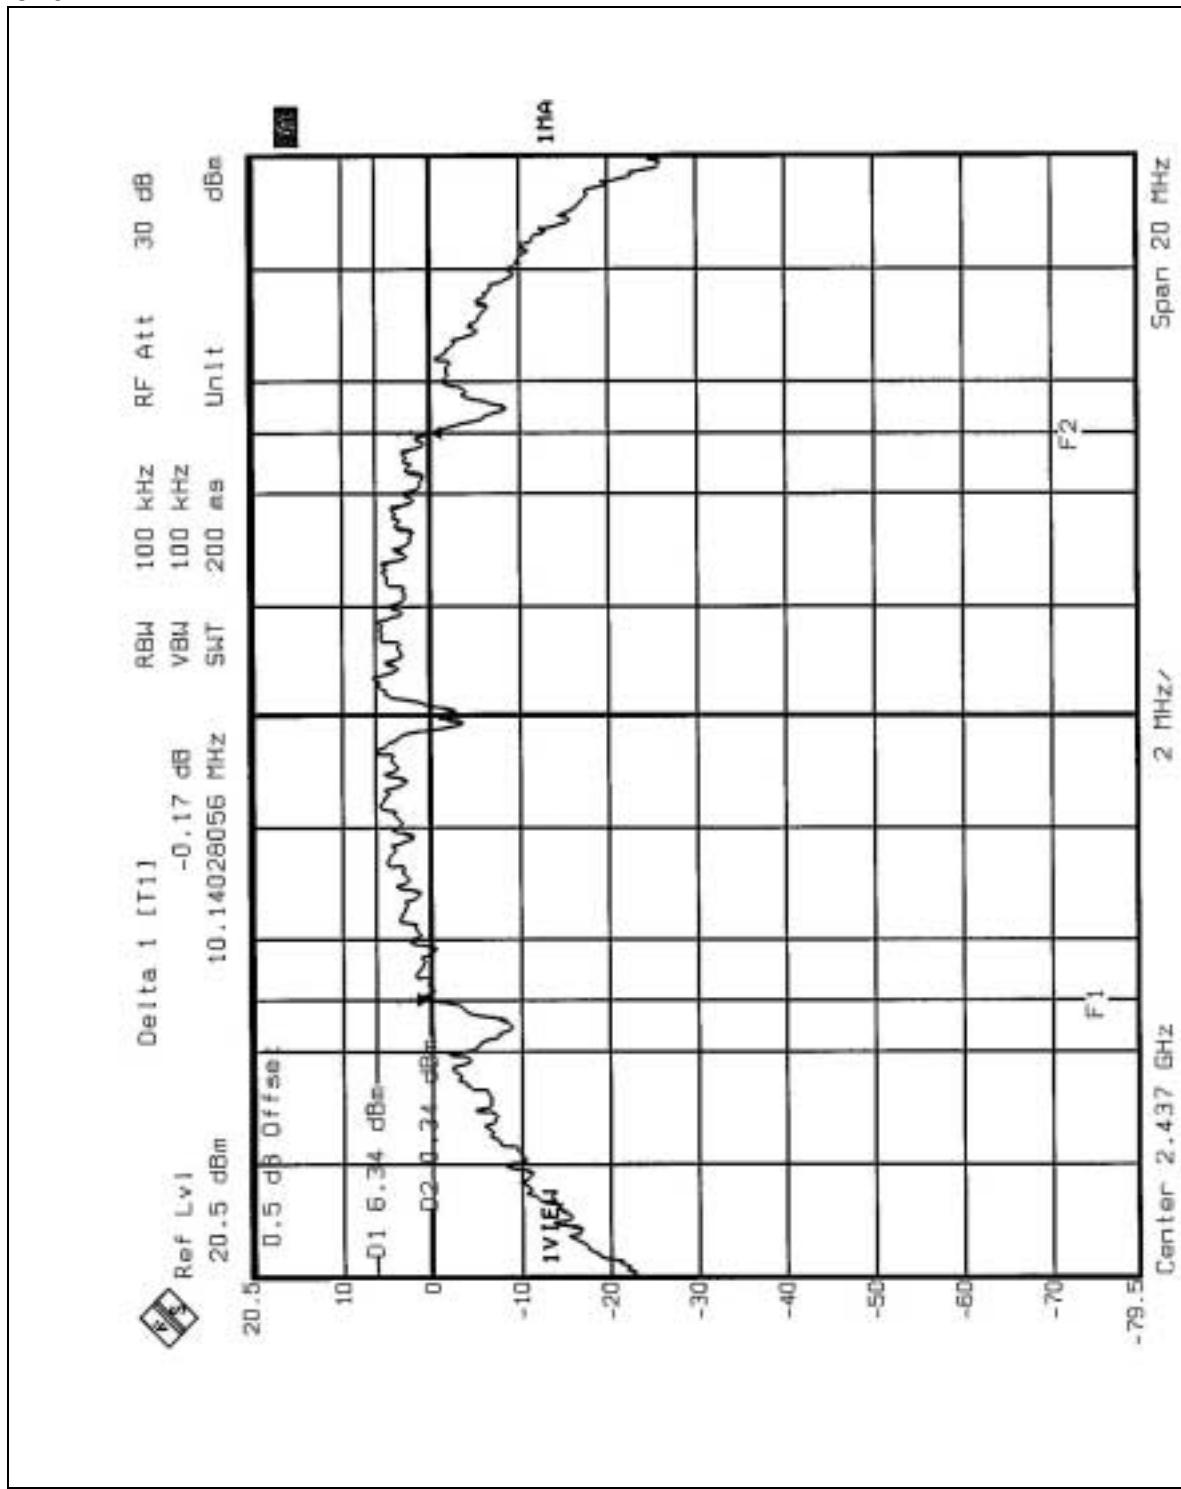

CH11

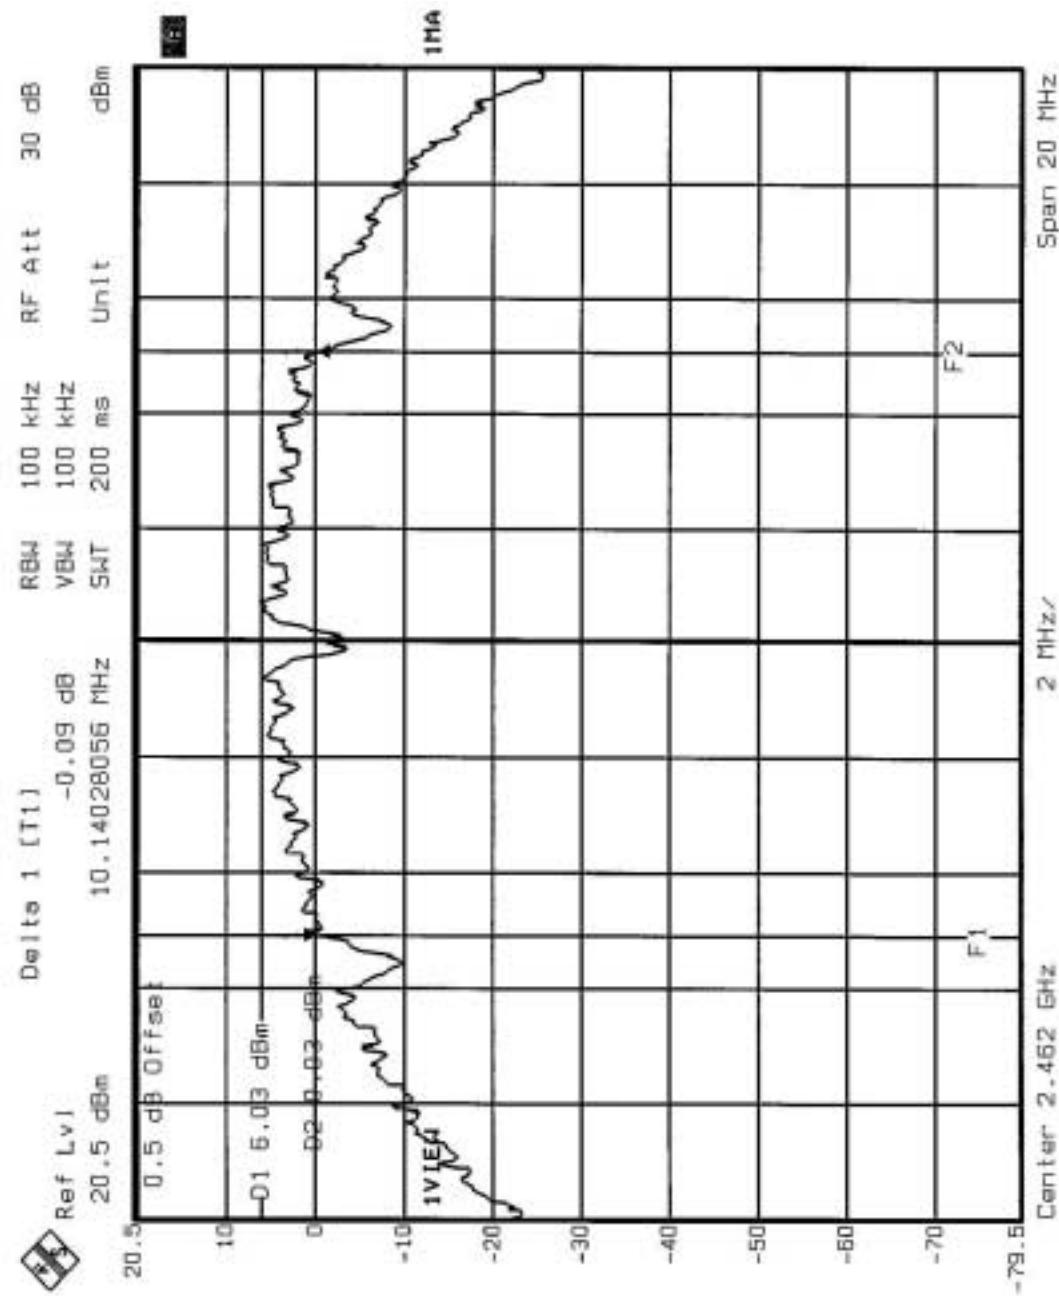

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
PEAK POWER SENSOR	E9327A	US40440722	Jul. 30, 2003
POWER METER	E4416A	GB41291118	Jul. 30, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

The transmitter output was connected to the peak power meter.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

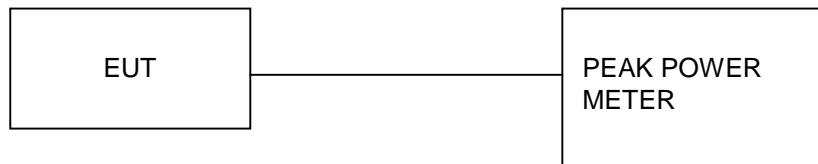

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

EUT	11Mbps USB Wireless LAN Adapter	MODEL	GN-WLBM101
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH, 1005 hPa
TESTED BY: Ansen Lei			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	19.42	30	PASS
6	2437	18.65	30	PASS
11	2462	18.54	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

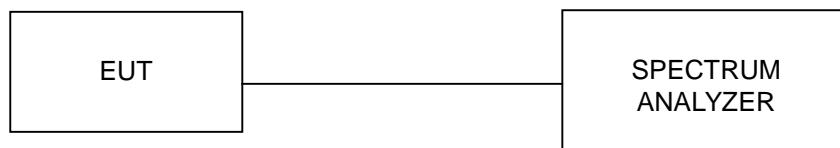

4.5.6 EUT OPERATING CONDITION


Same as Item 4.3.6

4.5.7 TEST RESULTS


EUT	11Mbps USB Wireless LAN Adapter	MODEL	GN-WLBM101
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23 deg. C, 67%RH, 1005 hPa
TESTED BY: Ansen Lei			

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-7.01	8	PASS
6	2437	-7.20	8	PASS
11	2462	-7.52	8	PASS


CH1

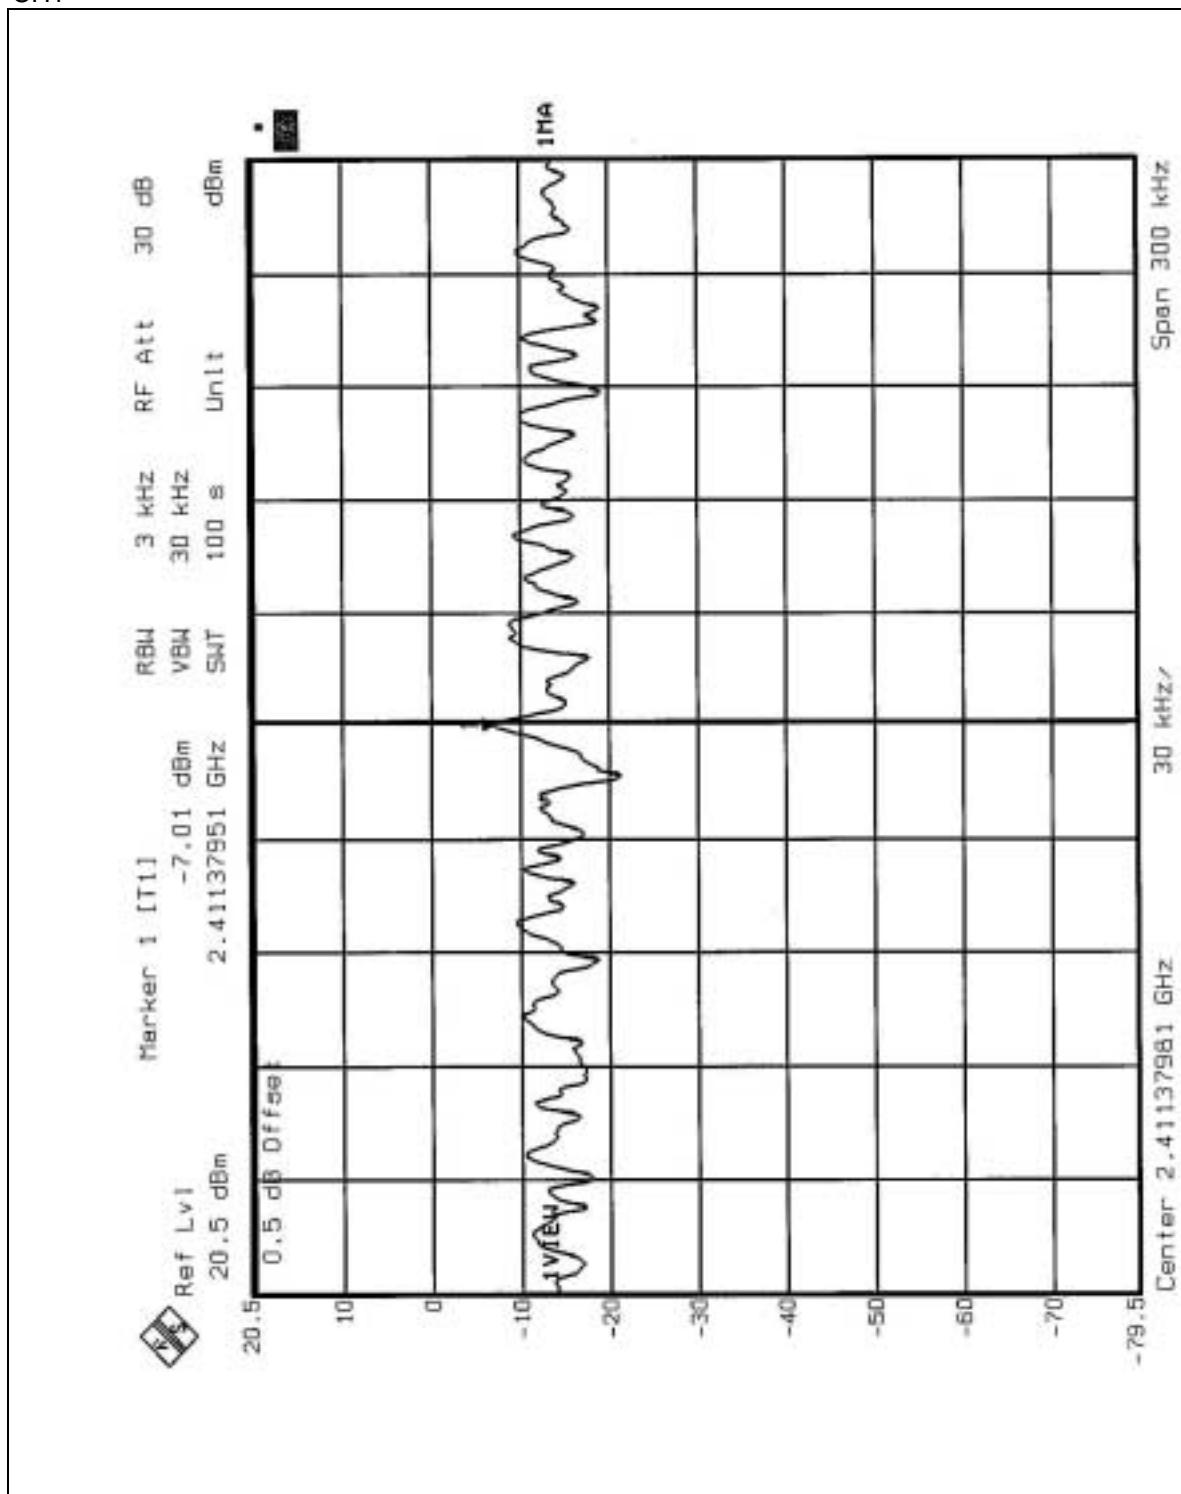

CH6

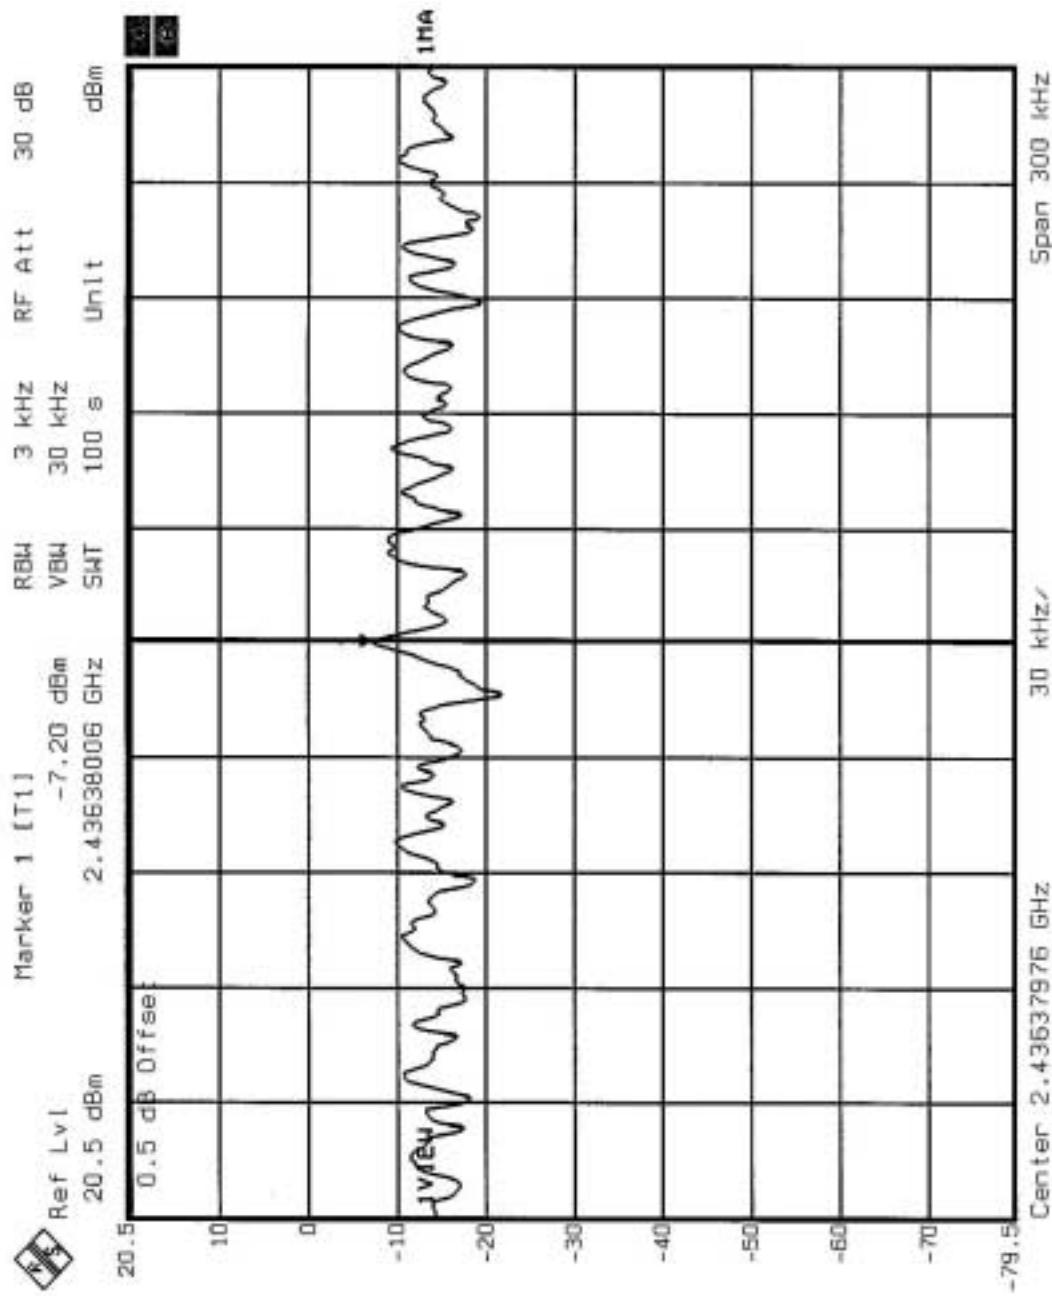

CH11

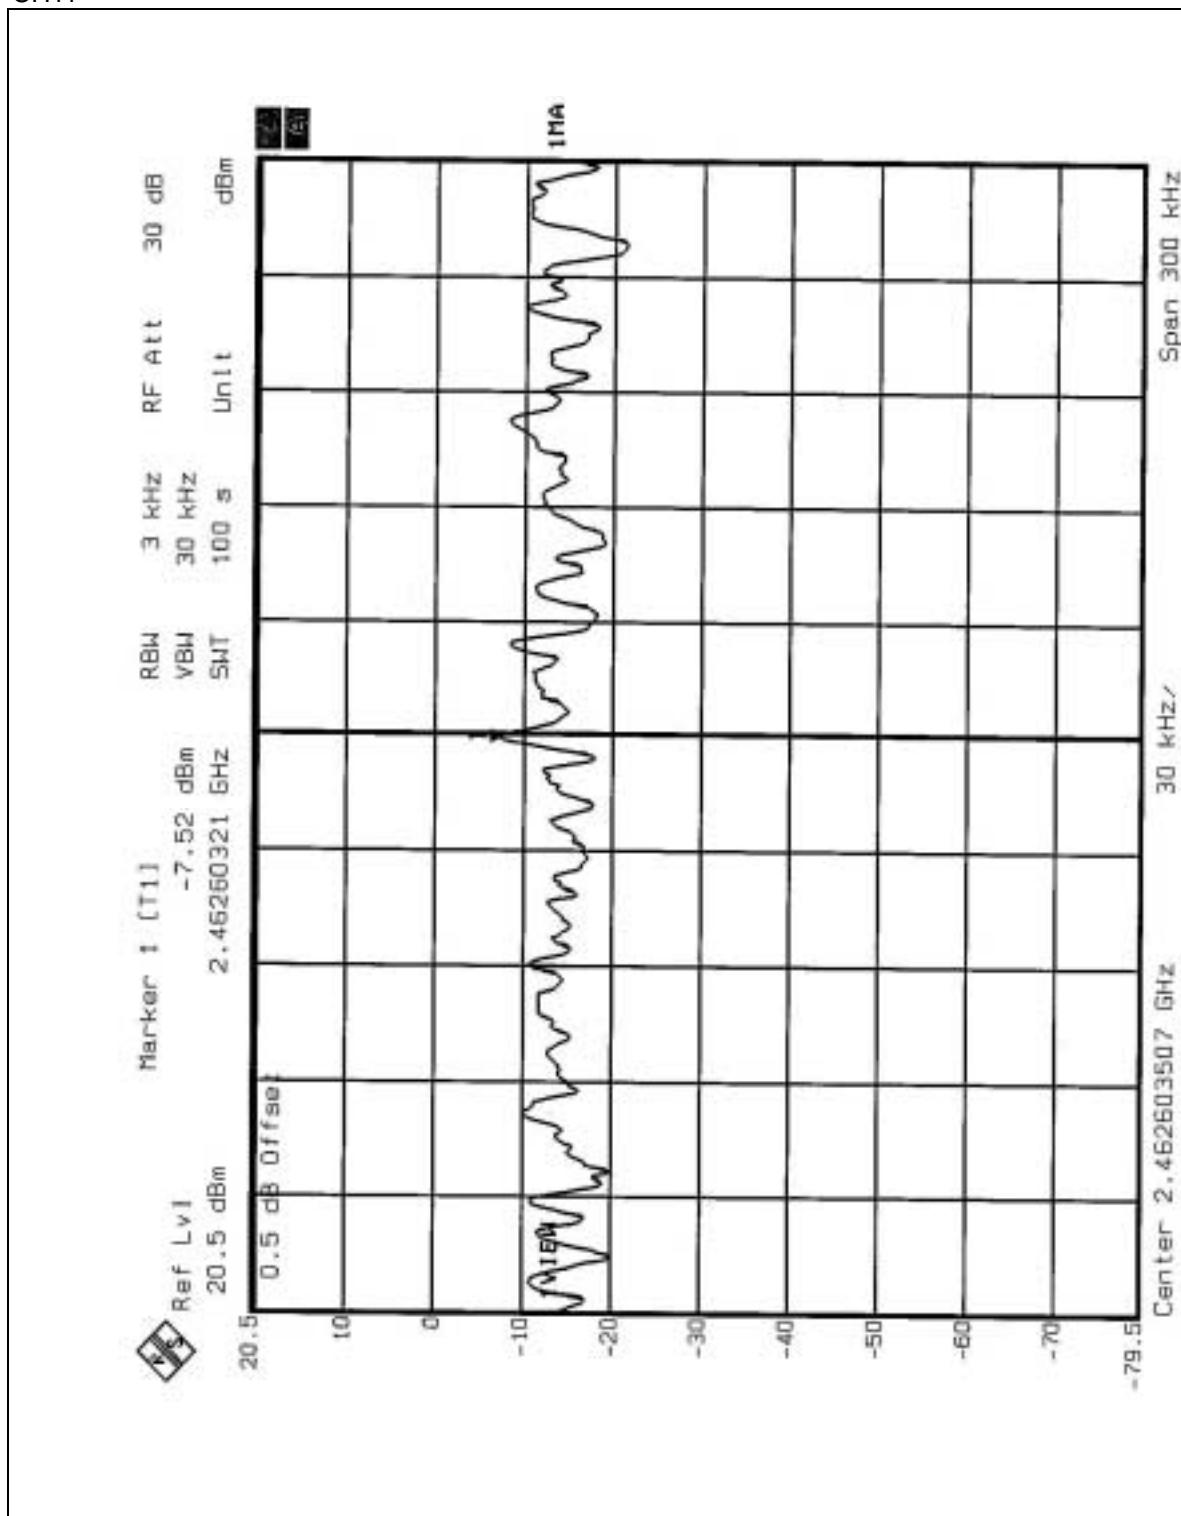

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation


4.6.5 EUT OPERATING CONDITION


Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE: The band edge emission plot on the following 2 pages shows 56.16dB / 55.21dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz / 2.3861GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 107.5dB_{UV}/m, so the maximum field strength in restrict band is $107.5 - 55.21 = 52.29$ dB_{UV}/m which is under 54 dB_{UV}/m limit.

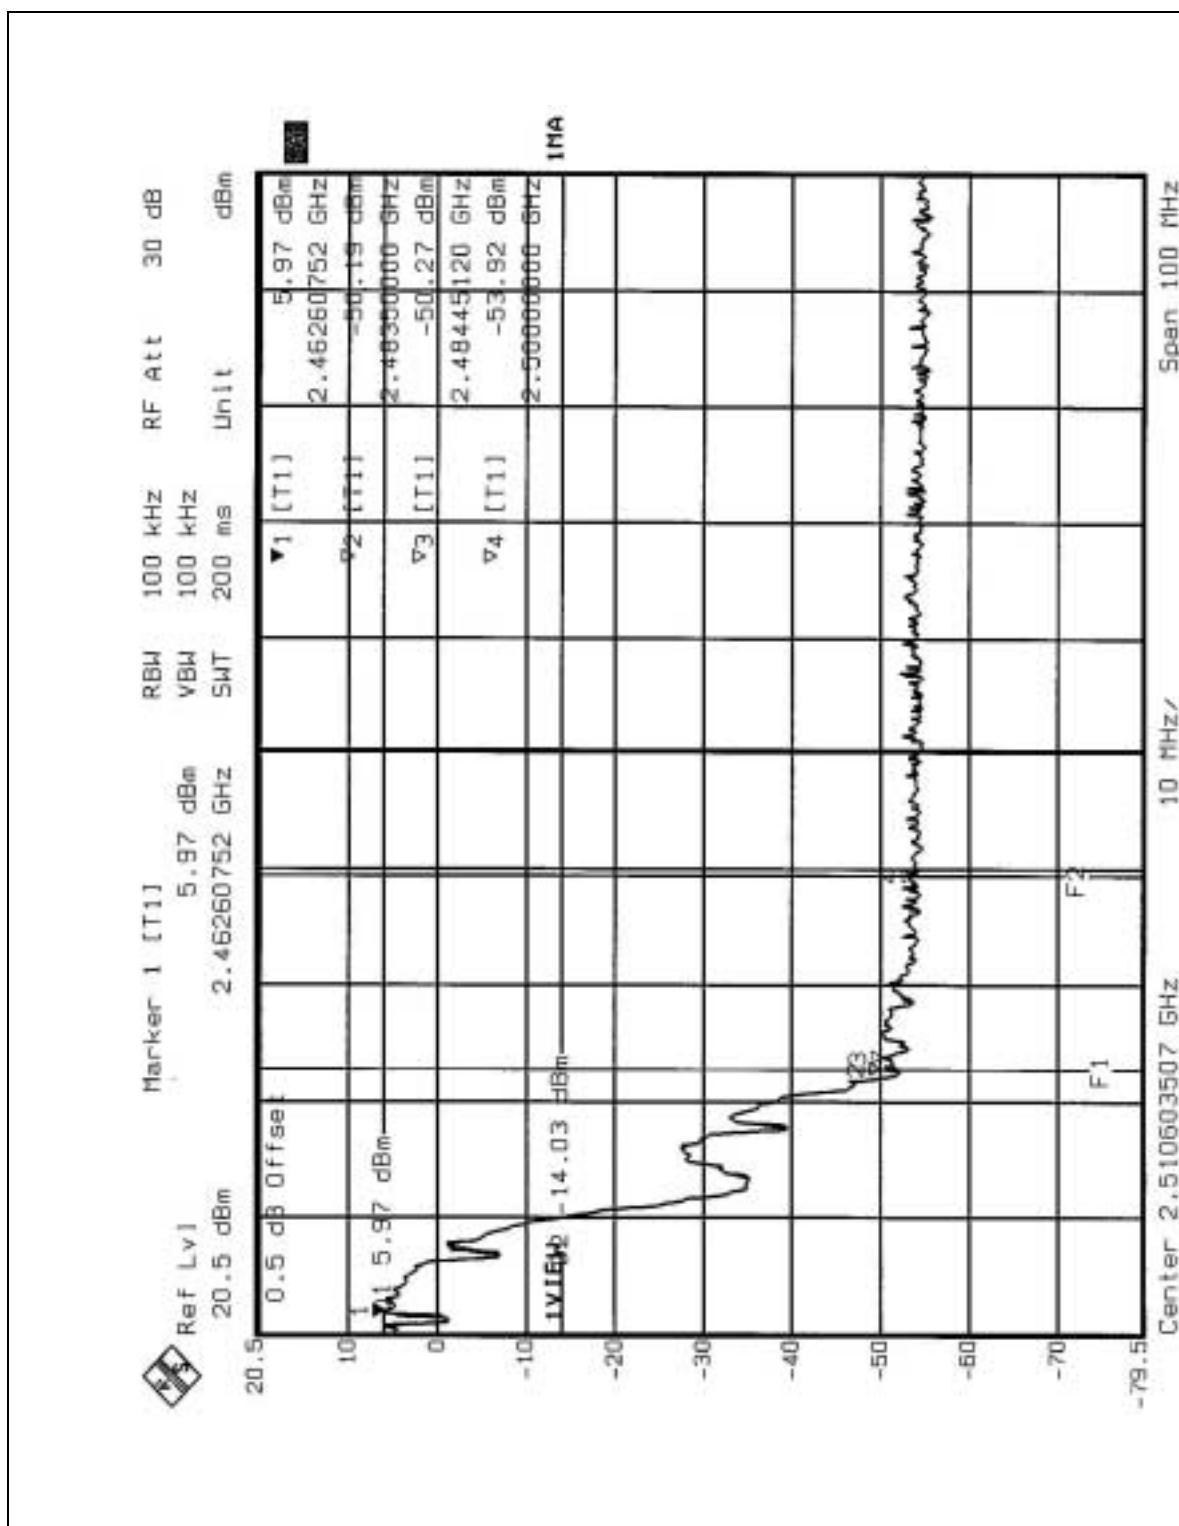

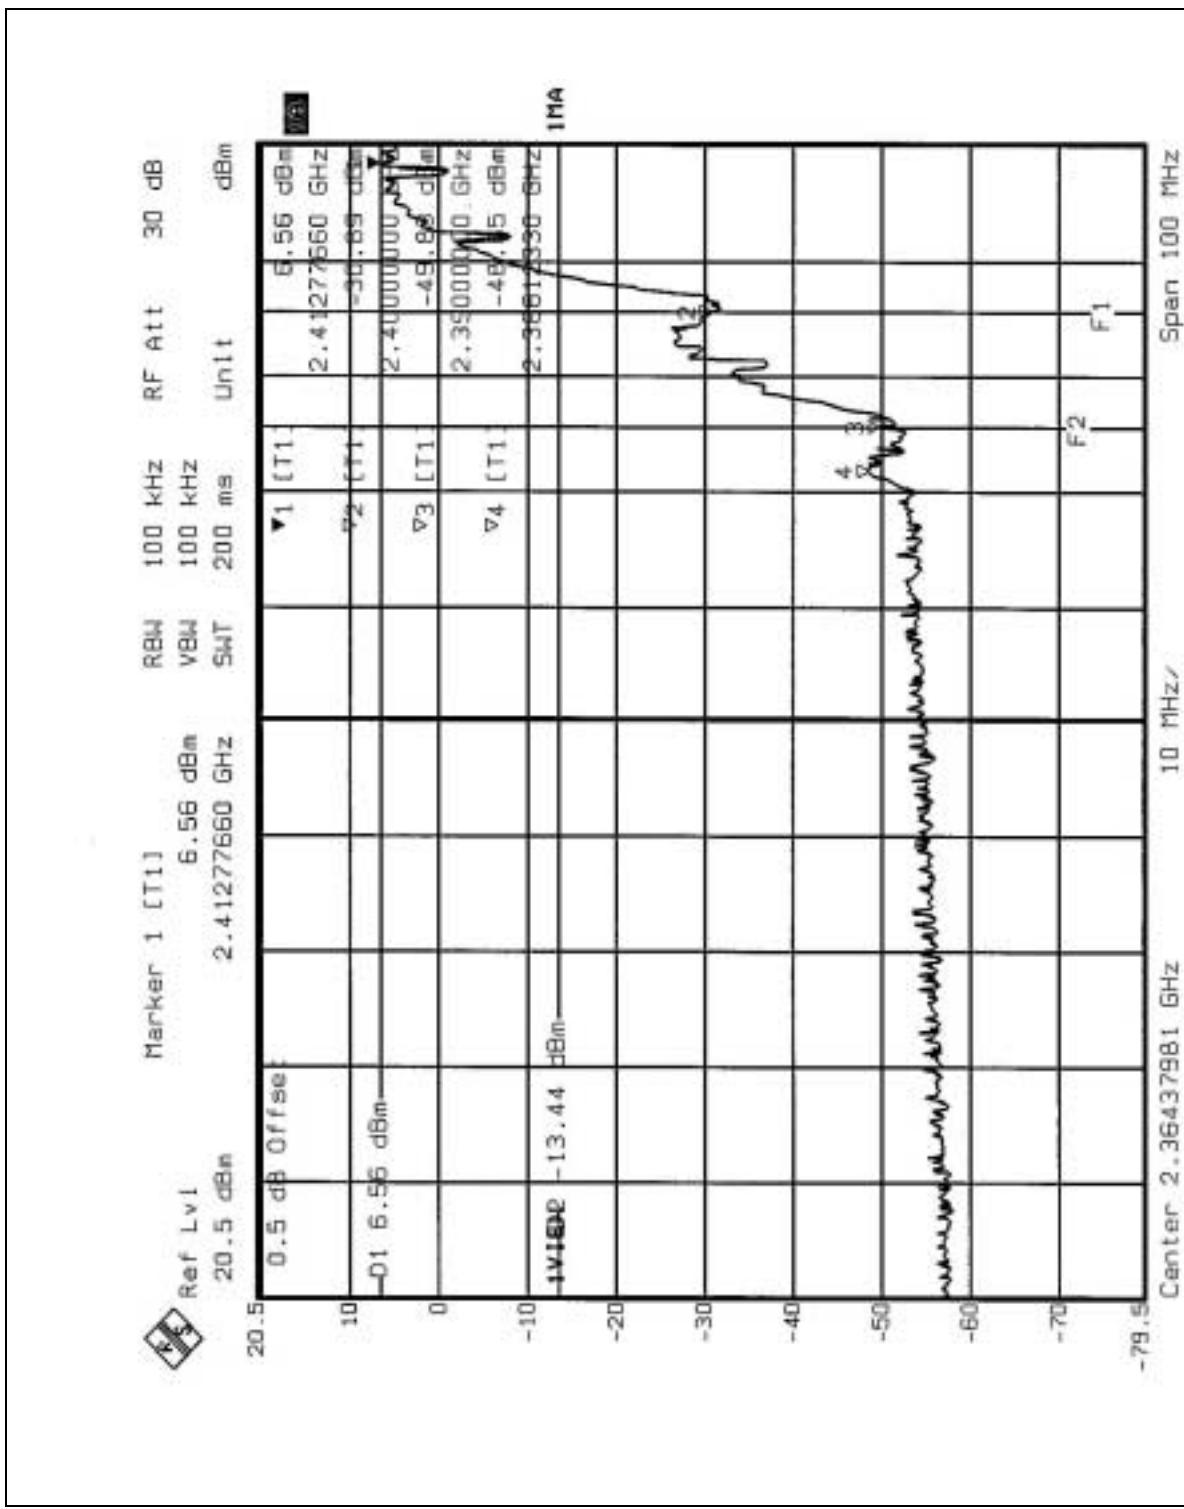

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Printed Patch Antenna. There is no antenna connector. The maximum Gain of the antenna is 1dBi only.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC Lab:
Tel: 886-35-935343
Fax: 886-35-935342

Lin Kou Safety Lab:
Tel: 886-2-26093195
Fax: 886-2-26093184

Lin Kou RF&Telecom Lab
Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@mail.adt.com.tw
Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.