

FCC 47 CFR PART 15 SUBPART C

Product Type : Slate PC

Applicant : GIGA-BYTE TECHNOLOGY CO., LTD.

Address : No. 6, Bao Chiang Road, Hsin-Tien Dist., New Taipei City 231, Taiwan

Trade Name : GIGABYTE

Model Number : S10xxxx (x can be 0-9, A-Z or blank)

Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2012
ANSI C63.4:2009

Receive Date : Oct. 31, 2013

Test Period : Nov. 08~Nov. 19, 2013

Issue Date : Dec. 03, 2013

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Revised By
00	Dec. 03, 2013	Initial Issue	

Verification of Compliance

Issued Date: 12/03/2013

Product Type : Slate PC
Applicant : GIGA-BYTE TECHNOLOGY CO., LTD.
Address : No. 6, Bao Chiang Road, Hsin-Tien Dist., New Taipei City 231, Taiwan
Trade Name : GIGABYTE
Model Number : S10xxxx (x can be 0-9, A-Z or blank)
FCC ID : JCK-S10M
EUT Rated Voltage : DC 19V, 2.1A
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2012
ANSI C63.4:2009
Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .

The test results of this report relate only to the tested sample identified in this report.

Approved By : Cran Yang Reviewed By : Fly Lu
(Manager) (Cran Yang) (Testing Engineer) (Fly Lu)

TABLE OF CONTENTS

1	General Information	6
2	EUT Description	7
3	Test Methodology	8
3.1.	Mode of Operation.....	8
3.2.	EUT Exercise Software	8
3.3.	Configuration of Test System Details	9
3.4.	Test Site Environment	10
4	Conducted Emission Measurement	10
4.1.	Limit	10
4.2.	Test Instruments	10
4.3.	Test Setup.....	10
4.4.	Test Procedure	11
4.5.	Test Result.....	12
5	Radiated Emission Measurement.....	14
5.1.	Limit	14
5.2.	Test Instruments	14
5.3.	Setup	15
5.4.	Test Procedure	16
5.5.	Test Result.....	18
6	Maximum Conducted Output Power Measurement.....	27
6.1.	Limit	27
6.2.	Test Setup.....	27
6.3.	Test Instruments	27
6.4.	Test Procedure	27
6.5.	Test Result.....	28
7	6dB RF Bandwidth and 99 % Occupied Bandwidth Measurement	32
7.1.	Limit	32
7.2.	Test Setup.....	32
7.3.	Test Instruments	32
7.4.	Test Procedure	32
7.5.	Test Result.....	33
7.6.	Test Graphs	35
8	Maximum Power Density Measurement	42
8.1.	Limit	42
8.2.	Test Setup.....	42
8.3.	Test Instruments	42
8.4.	Test Procedure	42
8.5.	Test Result.....	43
8.6.	Test Graphs	45

9	Out of Band Conducted Emissions Measurement	52
9.1.	Limit	52
9.2.	Test Setup.....	52
9.3.	Test Instruments	52
9.4.	Test Procedure	52
9.5.	Test Graphs	53
10	Band Edges Measurement	74
10.1.	Limit	74
10.2.	Test Setup.....	74
10.3.	Test Instruments	74
10.4.	Test Procedure	75
10.5.	Test Result.....	76
11	Antenna Measurement.....	96
11.1.	Limit	96
11.2.	Antenna Connector Construction	96

1 General Information

1.1 Summary of Test Result

Standard		Item	Result	Remark
15.247	RSS-GEN			
15.207	7.2.2	AC Power Conducted Emission	PASS	-----
Standard		Item	Result	Remark
15.247	RSS-210			
15.247(d)	A8.5	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	A8.4	Max. Output Power	PASS	-----
15.247(a)(2)	A8.2 (a)	6dB RF Bandwidth	PASS	-----
15.247(e)	A8.2 (b)	Power Spectral Density	PASS	-----
15.247(c)	A8.5	Out of Band Conducted Spurious Emission	PASS	-----
15.247(d)	A8.5	Band Edge Measurement	PASS	-----
15.247(c)	A8.5	Occupied Bandwidth Measurement	PASS	-----
15.203	-	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Test Item	Frequency Range		Uncertainty (dB)
Conducted Emission	9kHz ~ 30MHz		± 2.02
Radiated Emission	30MHz ~ 1000MHz	Horizontal	± 3.98
		Vertical	± 3.62
	1000MHz ~ 18000MHz	Horizontal	± 3.11
		Vertical	± 3.07
	18000MHz ~ 40000MHz	Horizontal	± 3.66
		Vertical	± 3.54

2 EUT Description

Product Type	Slate PC				
Trade Name	GIGABYTE				
Model No.	S10xxxx (x can be 0-9, A-Z or blank)				
Model Different Description	Those model numbers differ from each other in selling region.				
Applicant	GIGA-BYTE TECHNOLOGY CO., LTD. No. 6, Bao Chiang Road, Hsin-Tien Dist., New Taipei City 231, Taiwan				
Manufacturer (1)	GIGA-BYTE TECHNOLOGY CO., LTD. No. 6, Bao Chiang Road, Hsin-Tien Dist., New Taipei City 231, Taiwan				
Manufacturer (2)	G-STYLE Ltd. 5F, No.221, Sec. 3, Pai-Hsin Rd., Hsin-Tien Dist., New Taipei City 231, Taiwan				
FCC ID	JCK-S10M				
Frequency Range	IEEE 802.11b / 802.11g / 802.11n 2.4GHz 20MHz: 2412 ~ 2462 MHz IEEE 802.11n 2.4GHz 40MHz: 2422 ~ 2452 MHz Bluetooth v4.0 LE: 2402 ~2480 MHz				
Modulation Type	IEEE 802.11b:DSSS IEEE 802.11g:DSSS + OFDM IEEE 802.11n 2.4GHz 20MHz: OFDM IEEE 802.11n 2.4GHz 40MHz: OFDM Bluetooth v4.0 LE: GFSK				
Antenna Delivery	IEEE 802.11b/g: 1TX + 1RX IEEE 802.11n: 2*TX + 2*RX				
Antenna Used	Item	Antenna Port	Model	Type	Max Gain
	1	A	E-20000000000072_Tx 1	IFA Antenna	-4dBi
	2	B	E-20000000000073_Tx 2	IFA Antenna	1.41dBi
RF Output Power	IEEE 802.11b: 0.071 W / 18.49 dBm IEEE 802.11g: 0.135 W / 21.29 dBm IEEE 802.11n 2.4GHz 20MHz: 0.266 W / 24.25 dBm IEEE 802.11n 2.4GHz 40MHz: 0.240 W / 23.80 dBm Bluetooth v4.0 LE: 0.003 W / 4.67 dBm				
99 % Occupied Bandwidth	IEEE 802.11b: 14.14 MHz IEEE 802.11g: 16.92 MHz IEEE 802.11n 2.4GHz 20MHz: 17.93 MHz IEEE 802.11n 2.4GHz 40MHz: 36.02 MHz Bluetooth v4.0 LE: 1.06 MHz				

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Normal Operation Mode
Mode 2: IEEE 802.11b Link Mode
Mode 3: IEEE 802.11g Link Mode
Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode
Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode
Mode 6: Bluetooth v4.0 LE Link Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b mode: (ANT A / ANT B)

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate and cyclic delay diversity were chosen for full testing.

IEEE 802.11g mode: (ANT A / ANT B)

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate and cyclic delay diversity were chosen for full testing.

IEEE 802.11n 2.4GHz 20MHz mode: (ANT A / ANT B / ANT A + B)

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 13Mbps data rate were chosen for full testing.

IEEE 802.11n 2.4GHz 40MHz mode: (ANT A / ANT B / ANT A + B)

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 27Mbps data rate were chosen for full testing.


By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

3.2. EUT Exercise Software


1. Setup the EUT shown on 3.3.
2. Turn on the power of all equipment.
3. Turn on Wi-Fi function link to AP.
4. EUT run test program.

3.3. Configuration of Test System Details

Conducted Emission

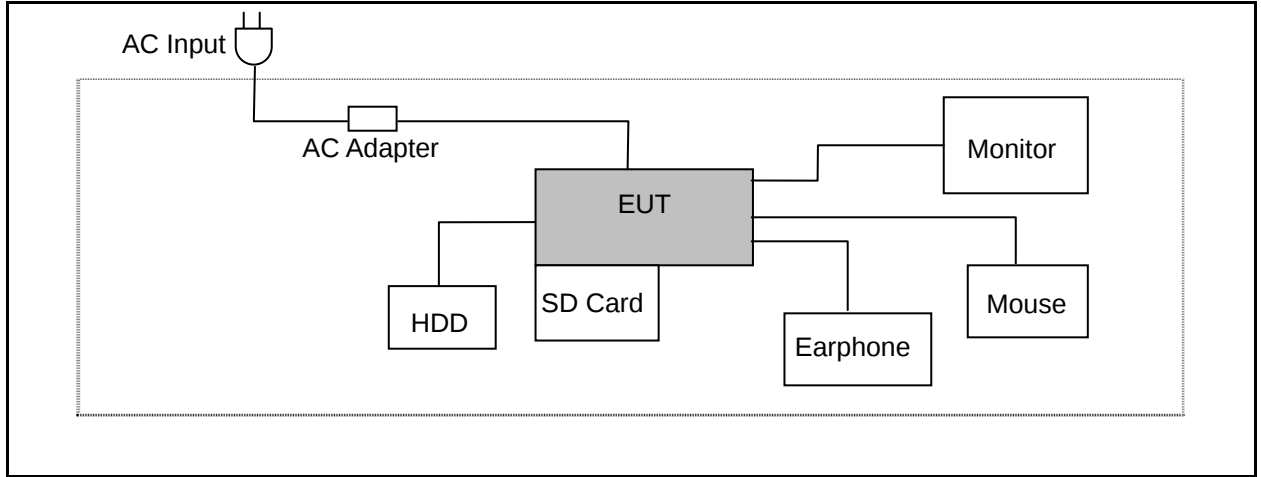

Radiated Emission

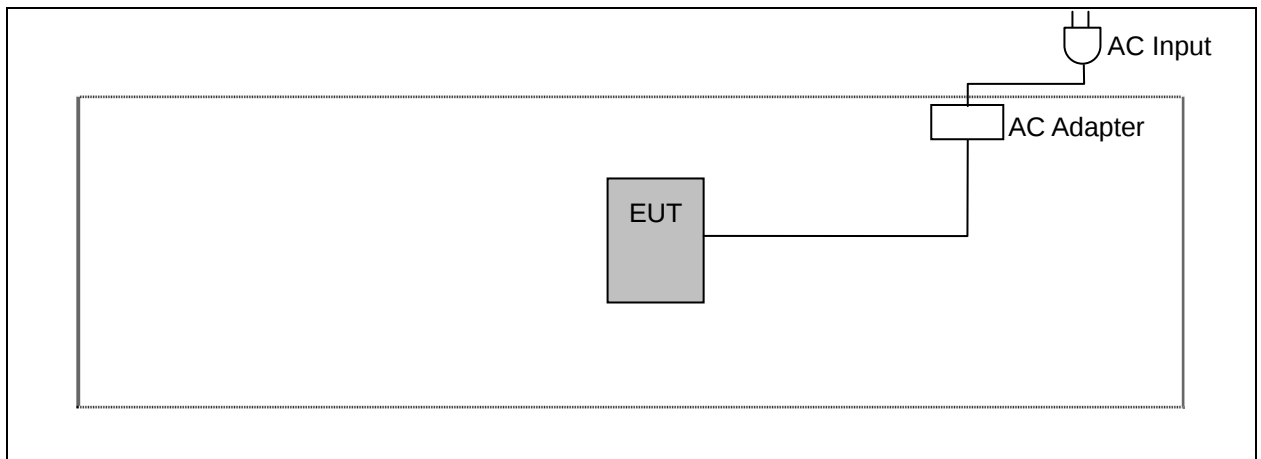

3.4. Test Site Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Conducted Emission Measurement

4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/06/2013	(1)
LISN	R&S	ENV216	101040	03/04/2013	(1)
LISN	R&S	ENV216	101041	03/04/2013	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

4.3. Test Setup

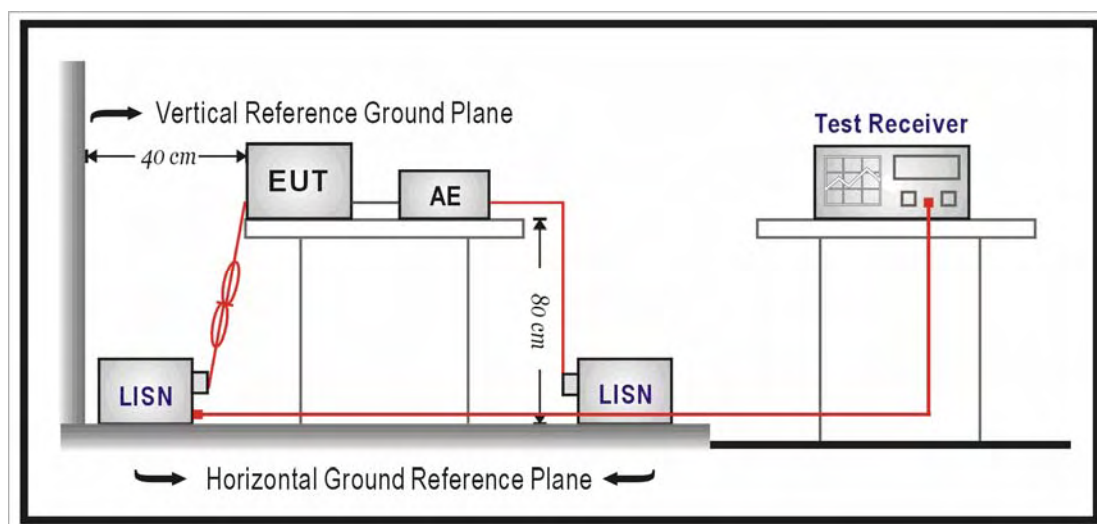

4.4. Test Procedure


The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.

4.5. Test Result


Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	11/08/2013
		Test By:	Fly Lu
Description:			

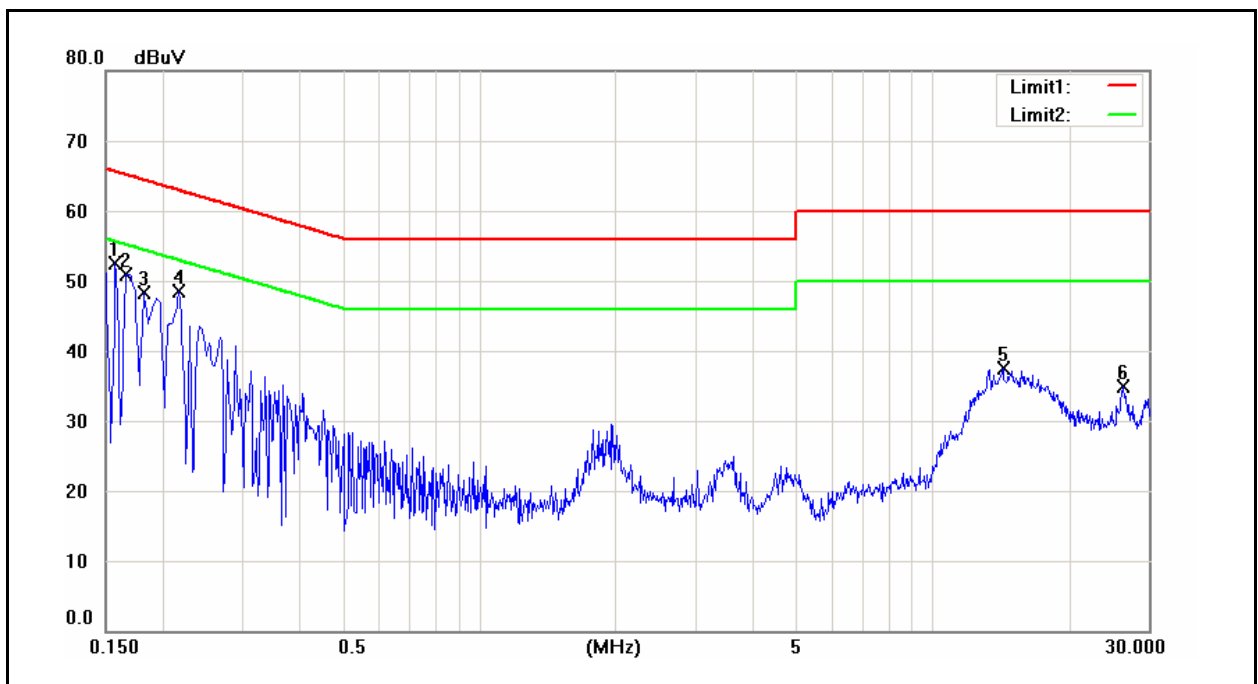

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	40.25	18.98	9.62	49.87	28.60	65.57	55.57	-15.70	-26.97	Pass
2	0.1660	35.39	9.45	9.62	45.01	19.07	65.16	55.16	-20.15	-36.09	Pass
3	0.1820	37.47	19.56	9.62	47.09	29.18	64.39	54.39	-17.30	-25.21	Pass
4	0.2180	32.04	13.48	9.62	41.66	23.10	62.89	52.89	-21.23	-29.79	Pass
5	14.2940	21.54	16.29	9.82	31.36	26.11	60.00	50.00	-28.64	-23.89	Pass
6	26.3060	18.05	12.05	9.86	27.91	21.91	60.00	50.00	-32.09	-28.09	Pass

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	11/08/2013
		Test By:	Fly Lu

Description:

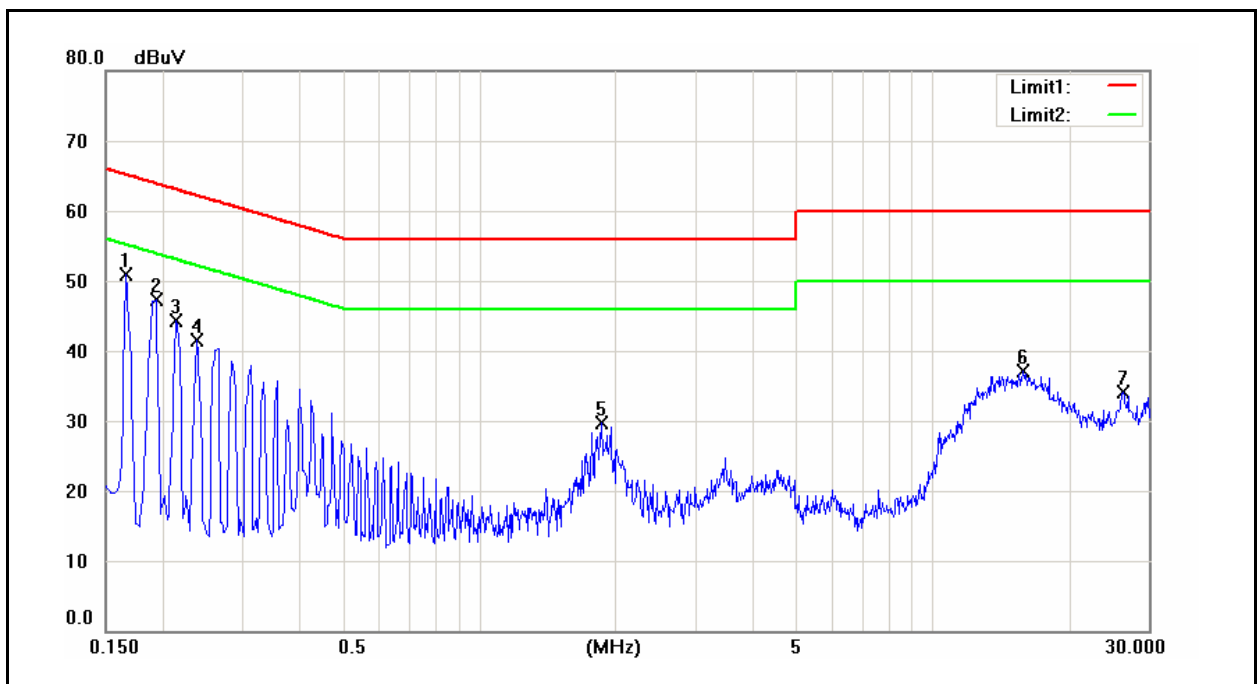

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1660	39.05	17.90	9.63	48.68	27.53	65.16	55.16	-16.48	-27.63	Pass
2	0.1940	35.13	13.63	9.63	44.76	23.26	63.86	53.86	-19.10	-30.60	Pass
3	0.2140	32.91	11.47	9.63	42.54	21.10	63.05	53.05	-20.51	-31.95	Pass
4	0.2380	28.88	11.29	9.63	38.51	20.92	62.17	52.17	-23.66	-31.25	Pass
5	1.8660	17.16	6.43	9.69	26.85	16.12	56.00	46.00	-29.15	-29.88	Pass
6	15.8420	21.98	16.45	9.96	31.94	26.41	60.00	50.00	-28.06	-23.59	Pass
7	26.3580	18.16	12.04	10.00	28.16	22.04	60.00	50.00	-31.84	-27.96	Pass

5 Radiated Emission Measurement

5.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

5.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/21/2013	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/21/2013	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2013	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/21/2013	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	07/16/2013	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/10/2013	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	06/13/2013	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	08/14/2012	(3)
Test Site	ATL	TE01	888001	08/28/2013	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.


Note: N.C.R. = No Calibration Request.

5.3. Setup

Below 1GHz

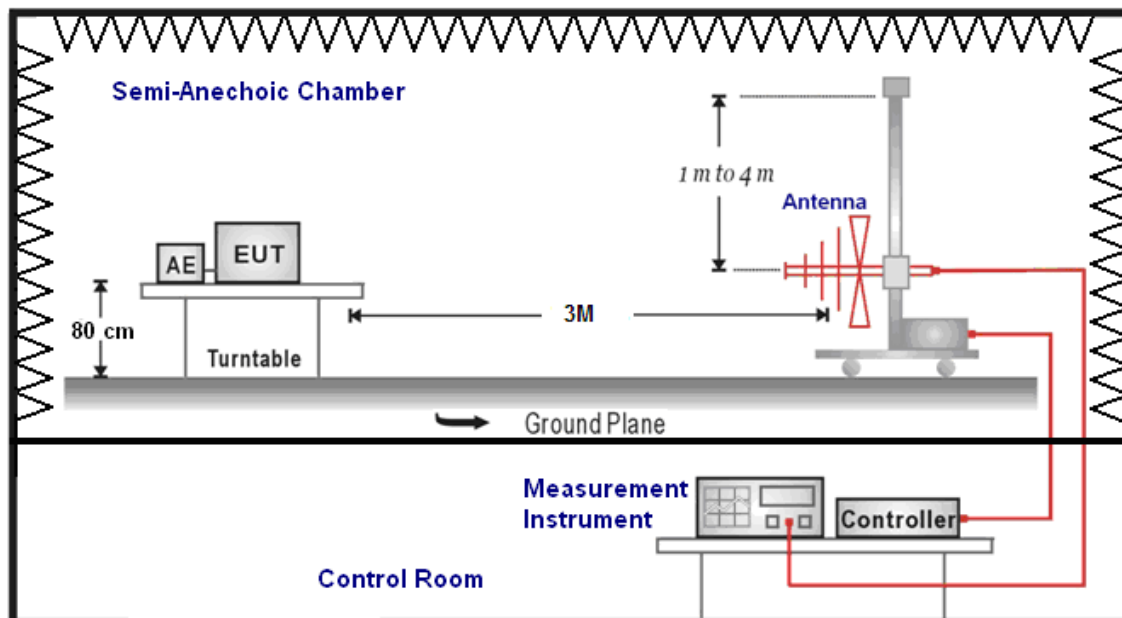

Above 1GHz

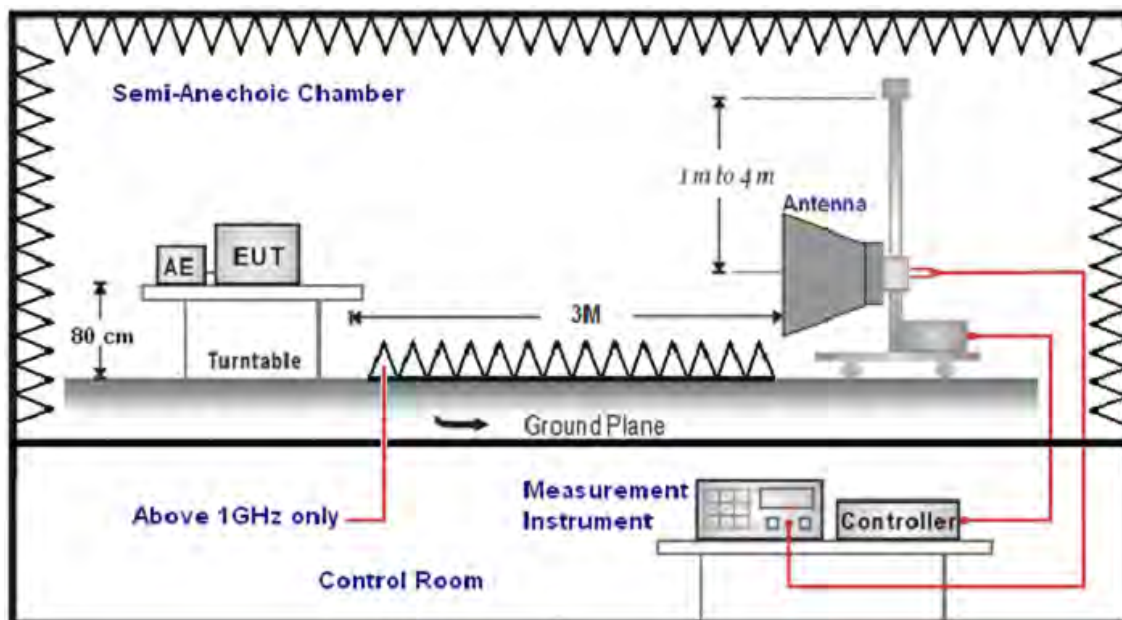

5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (mode VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.5. Test Result

Below 1GHz

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		S10		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		1		Date:		11/15/2013	
				Test By:		Fly Lu	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
157.5000	31.93	-17.02	14.91	43.50	-28.59	QP	H
333.0000	41.59	-9.39	32.20	46.00	-13.80	QP	H
450.0000	35.16	-7.91	27.25	46.00	-18.75	QP	H
600.0000	38.07	-5.04	33.03	46.00	-12.97	QP	H
667.0000	37.27	-3.96	33.31	46.00	-12.69	QP	H
800.0000	40.03	-1.55	38.48	46.00	-7.52	QP	H
180.5000	36.64	-15.63	21.01	43.50	-22.49	QP	V
315.5000	36.18	-10.01	26.17	46.00	-19.83	QP	V
550.0000	39.25	-6.56	32.69	46.00	-13.31	QP	V
666.5000	43.12	-3.96	39.16	46.00	-6.84	QP	V
800.0000	35.75	-1.55	34.20	46.00	-11.80	QP	V
901.0000	30.69	0.42	31.11	46.00	-14.89	QP	V

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Above 1GHz

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		S10		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		2		Date:		11/15/2013	
Frequency:		2412MHz		Test By:		Fly Lu	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2911.000	35.67	5.68	41.35	74.00	-32.65	peak	H
4647.000	34.89	11.25	46.14	74.00	-27.86	peak	H
6446.000	33.56	17.24	50.80	74.00	-23.20	peak	H
2939.000	36.66	5.75	42.41	74.00	-31.59	peak	V
4605.000	34.84	11.15	45.99	74.00	-28.01	peak	V
6397.000	32.88	17.10	49.98	74.00	-24.02	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		S10		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		2		Date:		11/15/2013	
Frequency:		2437MHz		Test By:		Fly Lu	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2890.000	36.07	5.63	41.70	74.00	-32.30	peak	H
4598.000	35.15	11.14	46.29	74.00	-27.71	peak	H
6439.000	33.35	17.22	50.57	74.00	-23.43	peak	H
2925.000	37.77	5.72	43.49	74.00	-30.51	peak	V
4577.000	35.24	11.07	46.31	74.00	-27.69	peak	V
6397.000	32.98	17.10	50.08	74.00	-23.92	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	S10			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	11/15/2013		
Frequency:	2462MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2897.000	37.09	5.64	42.73	74.00	-31.27	peak	H
4598.000	35.27	11.14	46.41	74.00	-27.59	peak	H
6341.000	32.80	16.92	49.72	74.00	-24.28	peak	H
2897.000	37.42	5.64	43.06	74.00	-30.94	peak	V
4570.000	35.70	11.06	46.76	74.00	-27.24	peak	V
6229.000	33.72	16.58	50.30	74.00	-23.70	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	S10			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	3			Date:	11/15/2013		
Frequency:	2412MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2925.000	37.51	5.72	43.23	74.00	-30.77	peak	H
4591.000	37.00	11.11	48.11	74.00	-25.89	peak	H
6418.000	32.81	17.16	49.97	74.00	-24.03	peak	H
3009.000	37.23	5.93	43.16	74.00	-30.84	peak	V
4598.000	34.64	11.14	45.78	74.00	-28.22	peak	V
6418.000	32.90	17.16	50.06	74.00	-23.94	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	S10			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	3			Date:	11/15/2013		
Frequency:	2437MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2953.000	36.69	5.79	42.48	74.00	-31.52	peak	H
4577.000	34.77	11.07	45.84	74.00	-28.16	peak	H
6411.000	33.36	17.14	50.50	74.00	-23.50	peak	H
2981.000	37.25	5.86	43.11	74.00	-30.89	peak	V
4577.000	35.31	11.07	46.38	74.00	-27.62	peak	V
6397.000	33.30	17.10	50.40	74.00	-23.60	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	S10			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	3			Date:	11/15/2013		
Frequency:	2462MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3002.000	37.54	5.91	43.45	74.00	-30.55	peak	H
4577.000	34.54	11.07	45.61	74.00	-28.39	peak	H
6439.000	33.70	17.22	50.92	74.00	-23.08	peak	H
2862.000	35.96	5.55	41.51	74.00	-32.49	peak	V
4591.000	34.66	11.11	45.77	74.00	-28.23	peak	V
6474.000	32.62	17.34	49.96	74.00	-24.04	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	S10			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	4			Date:	11/15/2013		
Frequency:	2412MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2918.000	37.20	5.70	42.90	74.00	-31.10	peak	H
4591.000	35.79	11.11	46.90	74.00	-27.10	peak	H
6446.000	33.04	17.24	50.28	74.00	-23.72	peak	H
2939.000	37.50	5.75	43.25	74.00	-30.75	peak	V
4598.000	34.60	11.14	45.74	74.00	-28.26	peak	V
6390.000	33.33	17.08	50.41	74.00	-23.59	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	S10			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	4			Date:	11/15/2013		
Frequency:	2437MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2939.000	36.09	5.75	41.84	74.00	-32.16	peak	H
4577.000	34.40	11.07	45.47	74.00	-28.53	peak	H
6369.000	32.71	17.00	49.71	74.00	-24.29	peak	H
2890.000	37.07	5.63	42.70	74.00	-31.30	peak	V
4591.000	35.21	11.11	46.32	74.00	-27.68	peak	V
6278.000	33.26	16.73	49.99	74.00	-24.01	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	S10			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	4			Date:	11/15/2013		
Frequency:	2462MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3086.000	38.68	6.10	44.78	74.00	-29.22	peak	H
4570.000	35.99	11.06	47.05	74.00	-26.95	peak	H
6257.000	34.10	16.66	50.76	74.00	-23.24	peak	H
2925.000	36.95	5.72	42.67	74.00	-31.33	peak	V
4598.000	35.05	11.14	46.19	74.00	-27.81	peak	V
6397.000	33.84	17.10	50.94	74.00	-23.06	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	S10			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	5			Date:	11/15/2013		
Frequency:	2422MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3191.000	36.09	6.33	42.42	74.00	-31.58	peak	H
4563.000	34.05	11.05	45.10	74.00	-28.90	peak	H
6397.000	33.29	17.10	50.39	74.00	-23.61	peak	H
2890.000	36.17	5.63	41.80	74.00	-32.20	peak	V
4598.000	35.19	11.14	46.33	74.00	-27.67	peak	V
6390.000	32.34	17.08	49.42	74.00	-24.58	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	S10			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	5			Date:	11/15/2013		
Frequency:	2437MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2974.000	37.03	5.84	42.87	74.00	-31.13	peak	H
4563.000	35.43	11.05	46.48	74.00	-27.52	peak	H
6425.000	33.38	17.18	50.56	74.00	-23.44	peak	H
2918.000	36.50	5.70	42.20	74.00	-31.80	peak	V
4577.000	35.05	11.07	46.12	74.00	-27.88	peak	V
6362.000	33.95	16.99	50.94	74.00	-23.06	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	S10			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	5			Date:	11/15/2013		
Frequency:	2452MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2911.000	37.02	5.68	42.70	74.00	-31.30	peak	H
4577.000	34.81	11.07	45.88	74.00	-28.12	peak	H
6257.000	33.83	16.66	50.49	74.00	-23.51	peak	H
2939.000	36.46	5.75	42.21	74.00	-31.79	peak	V
4598.000	35.24	11.14	46.38	74.00	-27.62	peak	V
6397.000	33.43	17.10	50.53	74.00	-23.47	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	S10			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	6			Date:	11/21/2013		
Frequency:	2402MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3079.000	37.28	6.08	43.36	74.00	-30.64	peak	H
4619.000	34.34	11.19	45.53	74.00	-28.47	peak	H
6446.000	32.88	17.24	50.12	74.00	-23.88	peak	H
2981.000	36.43	5.86	42.29	74.00	-31.71	peak	V
4563.000	34.86	11.05	45.91	74.00	-28.09	peak	V
6446.000	33.60	17.24	50.84	74.00	-23.16	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	S10			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	6			Date:	11/21/2013		
Frequency:	2440MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2883.000	37.32	5.61	42.93	74.00	-31.07	peak	H
4591.000	34.92	11.11	46.03	74.00	-27.97	peak	H
6439.000	32.76	17.22	49.98	74.00	-24.02	peak	H
2953.000	37.22	5.79	43.01	74.00	-30.99	peak	V
4570.000	34.27	11.06	45.33	74.00	-28.67	peak	V
6383.000	33.35	17.06	50.41	74.00	-23.59	peak	V


Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		S10		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		6		Date:		11/21/2013	
Frequency:		2480MHz		Test By:		Fly Lu	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2883.000	35.59	5.61	41.20	74.00	-32.80	peak	H
4577.000	35.32	11.07	46.39	74.00	-27.61	peak	H
6425.000	33.61	17.18	50.79	74.00	-23.21	peak	H
2883.000	36.61	5.61	42.22	74.00	-31.78	peak	V
4563.000	35.10	11.05	46.15	74.00	-27.85	peak	V
6383.000	32.90	17.06	49.96	74.00	-24.04	peak	V

6 Maximum Conducted Output Power Measurement

6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

6.2. Test Setup

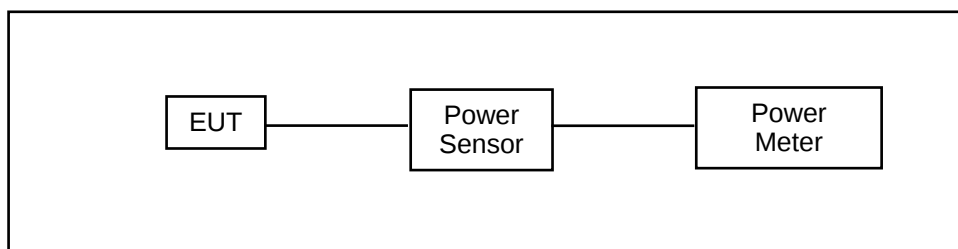

6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	12/19/2012	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	12/19/2012	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

6.5. Test Result

Model Number	S10									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 2: IEEE 802.11b Link Mode									
Date of Test	11/08/2013						Test Site	TE05		
Frequency (MHz)	Data Rate	ANT A				ANT B				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2412	1M	15.32	0.034	17.89	0.062	13.95	0.025	16.67	0.046	< 30
2437		15.38	0.035	18.49	0.071	13.97	0.025	18.39	0.069	< 30
2462		15.35	0.034	18.29	0.067	13.92	0.025	16.55	0.045	< 30
2437	2M	15.36	0.034	18.44	0.070	13.96	0.025	18.37	0.069	< 30
2437	5.5M	15.34	0.034	18.40	0.069	13.88	0.024	18.30	0.068	< 30
2437	11M	15.23	0.033	18.13	0.065	13.81	0.024	18.25	0.067	< 30

Model Number	S10									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 3: IEEE 802.11g Link Mode									
Date of Test	11/08/2013						Test Site	TE05		
Frequency (MHz)	Data Rate	ANT A				ANT B				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2412	6M	13.46	0.022	19.42	0.087	11.75	0.015	17.58	0.057	< 30
2437		16.42	0.044	21.29	0.135	15.45	0.035	20.16	0.104	< 30
2462		13.37	0.022	19.30	0.085	13.41	0.022	19.08	0.081	< 30
2437	9M	16.39	0.044	21.25	0.133	15.37	0.034	20.07	0.102	< 30
2437	12M	16.37	0.043	21.24	0.133	15.29	0.034	20.03	0.101	< 30
2437	18M	16.28	0.042	21.15	0.130	15.19	0.033	19.92	0.098	< 30
2437	24M	16.15	0.041	20.95	0.124	15.05	0.032	19.88	0.097	< 30
2437	36M	16.04	0.040	20.90	0.123	15.00	0.032	19.78	0.095	< 30
2437	48M	15.94	0.039	20.77	0.119	14.94	0.031	19.73	0.094	< 30
2437	54M	16.11	0.041	20.93	0.124	14.88	0.031	19.66	0.092	< 30

Model Number	S10									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode									
Date of Test	11/08/2013						Test Site	TE05		
Frequency (MHz)	Data Rate	ANT A				ANT B				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2412	13M	13.46	0.022	19.53	0.090	11.87	0.015	18.23	0.067	< 30
2437		16.25	0.042	21.68	0.147	15.42	0.035	20.74	0.119	< 30
2462		13.31	0.021	19.44	0.088	13.40	0.022	19.11	0.081	< 30
2437	26M	16.22	0.042	21.56	0.143	15.39	0.035	20.71	0.118	< 30
2437	39M	16.18	0.041	21.52	0.142	15.33	0.034	20.68	0.117	< 30
2437	52M	16.01	0.040	21.48	0.141	15.30	0.034	20.62	0.115	< 30
2437	78M	15.89	0.039	21.37	0.137	15.28	0.034	20.59	0.115	< 30
2437	104M	15.84	0.038	21.35	0.136	15.22	0.033	20.55	0.114	< 30
2437	117M	15.74	0.037	21.28	0.134	15.16	0.033	20.51	0.112	< 30
2437	130M	15.70	0.037	21.23	0.133	15.03	0.032	20.47	0.111	< 30
Frequency (MHz)	Data Rate	ANT A + B								Limit (dBm)
		Average Power				Peak Power				
		(dBm)		(W)		(dBm)		(W)		
2412	13M	15.75		0.038		21.94		0.156		< 30
2437		18.87		0.077		24.25		0.266		< 30
2462		16.37		0.043		22.29		0.169		< 30
2437	26M	18.84		0.076		24.17		0.261		< 30
2437	39M	18.79		0.076		24.13		0.259		< 30
2437	52M	18.68		0.074		24.08		0.256		< 30
2437	78M	18.61		0.073		24.01		0.252		< 30
2437	104M	18.55		0.072		23.98		0.250		< 30
2437	117M	18.47		0.070		23.92		0.247		< 30
2437	130M	18.39		0.069		23.88		0.244		< 30

Model Number	S10									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode									
Date of Test	11/08/2013						Test Site	TE05		
Frequency (MHz)	Data Rate	ANT A				ANT B				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2422	27M	11.85	0.015	17.89	0.062	9.88	0.010	16.53	0.045	< 30
2437		16.35	0.043	21.43	0.139	13.40	0.022	20.05	0.101	< 30
2452		12.85	0.019	18.72	0.074	12.85	0.019	18.89	0.077	< 30
2437	54M	16.26	0.042	21.37	0.137	13.29	0.021	19.93	0.098	< 30
2437	81M	16.12	0.041	21.35	0.136	13.22	0.021	19.87	0.097	< 30
2437	108M	16.02	0.040	21.32	0.136	13.19	0.021	19.77	0.095	< 30
2437	162M	15.95	0.039	21.29	0.135	13.16	0.021	19.69	0.093	< 30
2437	216M	15.72	0.037	21.25	0.133	13.09	0.020	19.61	0.091	< 30
2437	243M	15.52	0.036	21.17	0.131	13.03	0.020	19.53	0.090	< 30
2437	270M	15.42	0.035	21.13	0.130	12.96	0.020	19.45	0.088	< 30
Frequency (MHz)	Data Rate	ANT A + B								Limit (dBm)
		Average Power				Peak Power				
		(dBm)		(W)		(dBm)		(W)		
2422	27M	13.99		0.025		20.27		0.106		< 30
2437		18.13		0.065		23.80		0.240		< 30
2452		15.86		0.039		21.82		0.152		< 30
2437	54M	18.03		0.064		23.72		0.235		< 30
2437	81M	17.92		0.062		23.68		0.234		< 30
2437	108M	17.84		0.061		23.62		0.230		< 30
2437	162M	17.79		0.060		23.57		0.228		< 30
2437	216M	17.61		0.058		23.52		0.225		< 30
2437	243M	17.46		0.056		23.44		0.221		< 30
2437	270M	17.37		0.055		23.38		0.218		< 30

Model Number	S10					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 6: Bluetooth v4.0 LE Link Mode					
Date of Test	11/08/2013			Test Site	TE05	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2402	---	2.00	0.002	4.26	0.003	< 30
2440	---	2.25	0.002	4.51	0.003	< 30
2480	---	2.43	0.002	4.67	0.003	< 30


7 6dB RF Bandwidth and 99 % Occupied Bandwidth Measurement

7.1. Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

99 % Occupied Bandwidth: N/A

7.2. Test Setup

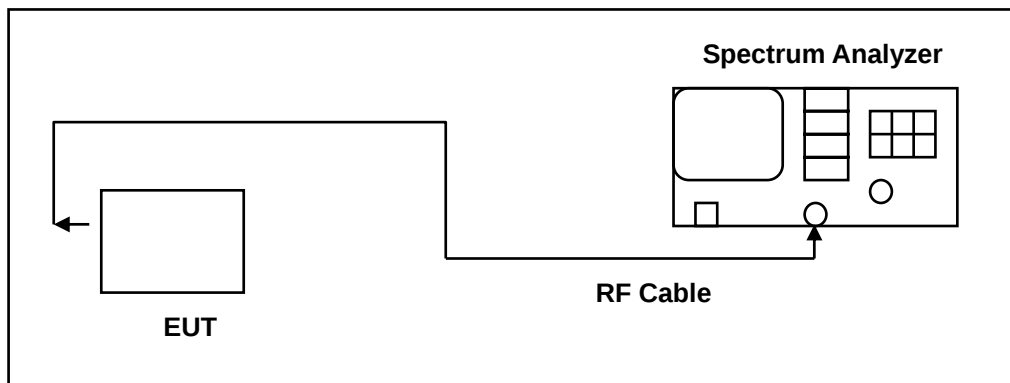

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

dRemark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

7.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2012 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)

99 % Occupied Bandwidth: The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

7.5. Test Result

Model Number	S10		
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 2: IEEE 802.11b Link Mode		
Date of Test	11/18/2013	Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6dB RF Bandwidth Limit (MHz)
2412	12.085	14.1199	> 0.500
2437	12.088	14.1229	> 0.500
2462	12.084	14.1435	> 0.500




Model Number	S10		
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 3: IEEE 802.11g Link Mode		
Date of Test	11/18/2013	Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6dB RF Bandwidth Limit (MHz)
2412	16.402	16.5155	> 0.500
2437	16.392	16.9161	> 0.500
2462	16.397	16.5113	> 0.500

Model Number	S10					
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth					
Test Mode	Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode					
Date of Test	11/18/2013				Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)		99 % Occupied Bandwidth (MHz)		6dB RF Bandwidth Limit (MHz)	
	ANT A	ANT B	ANT A	ANT B		
2412	17.641	17.651	17.6845	17.7124	> 0.500	
2437	17.614	17.641	17.7649	17.9314	> 0.500	
2462	17.631	17.675	17.7177	17.7256	> 0.500	




Model Number	S10				
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth				
Test Mode	Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode				
Date of Test	11/18/2013			Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)		99 % Occupied Bandwidth (MHz)		6dB RF Bandwidth Limit (MHz)
	ANT A	ANT B	ANT A	ANT B	
2422	35.194	35.176	35.7528	35.8071	> 0.500
2437	35.165	35.133	35.8723	36.0233	> 0.500
2452	35.223	35.171	35.7687	35.7663	> 0.500

Model Number	S10				
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth				
Test Mode	Mode 6: Bluetooth v4.0 LE Link Mode				
Date of Test	11/21/2013			Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (KHz)	99 % Occupied Bandwidth (MHz)		6dB RF Bandwidth Limit (MHz)	
2402	663.130	1.0574		> 0.500	
2440	654.667	1.0562		> 0.500	
2480	666.195	1.0526		> 0.500	




7.6. Test Graphs

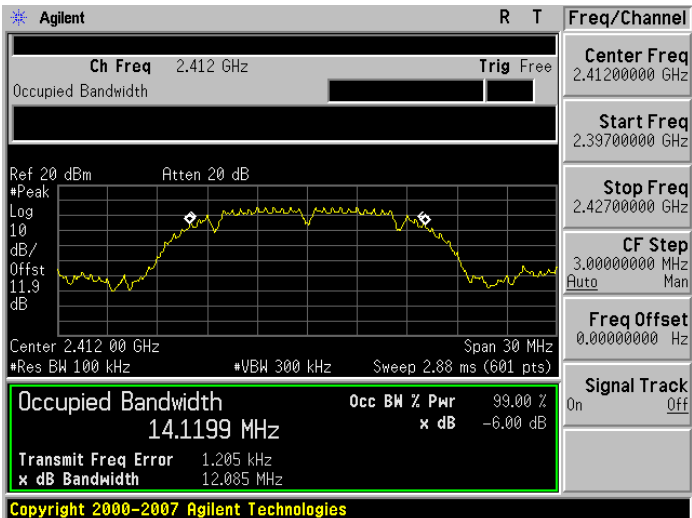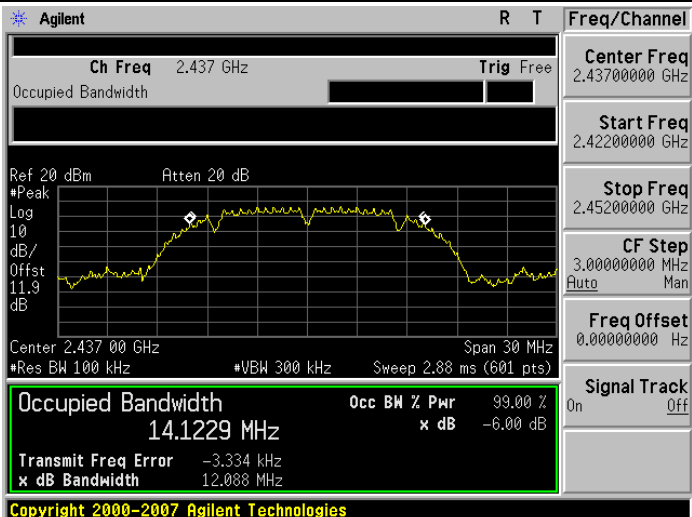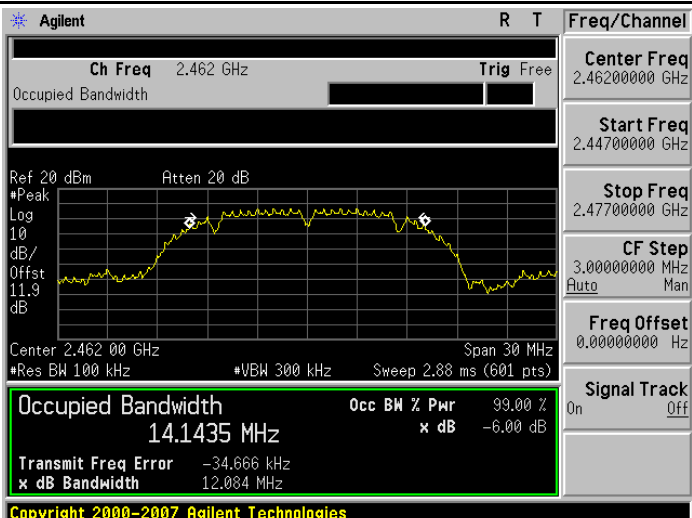Mode 2: IEEE 802.11b Link Mode	
2412	 Agilent R T Freq/Channel Ch Freq 2.412 GHz Trig Free Center Freq 2.41200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.42700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 11.9 dB Center 2.412 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 14.119 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 1.205 kHz x dB Bandwidth 12.085 MHz Copyright 2000-2007 Agilent Technologies
2437	 Agilent R T Freq/Channel Ch Freq 2.437 GHz Trig Free Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 11.9 dB Center 2.437 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 14.1229 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -3.334 kHz x dB Bandwidth 12.088 MHz Copyright 2000-2007 Agilent Technologies
2462	 Agilent R T Freq/Channel Ch Freq 2.462 GHz Trig Free Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 11.9 dB Center 2.462 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 14.1435 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -34.666 kHz x dB Bandwidth 12.084 MHz Copyright 2000-2007 Agilent Technologies




Mode 3: IEEE 802.11g Link Mode

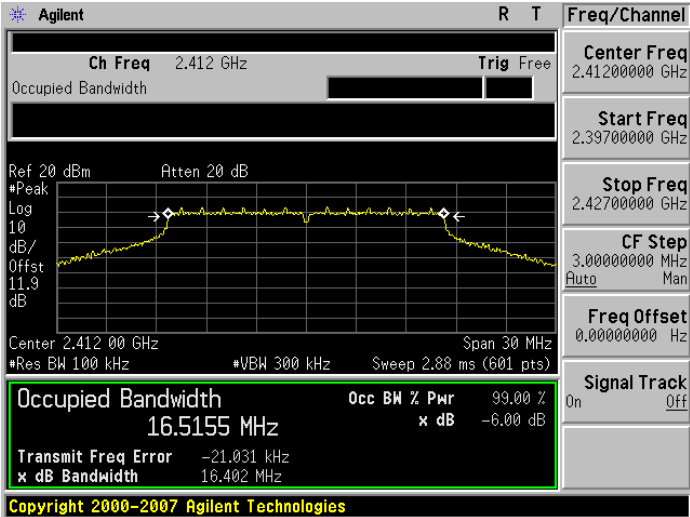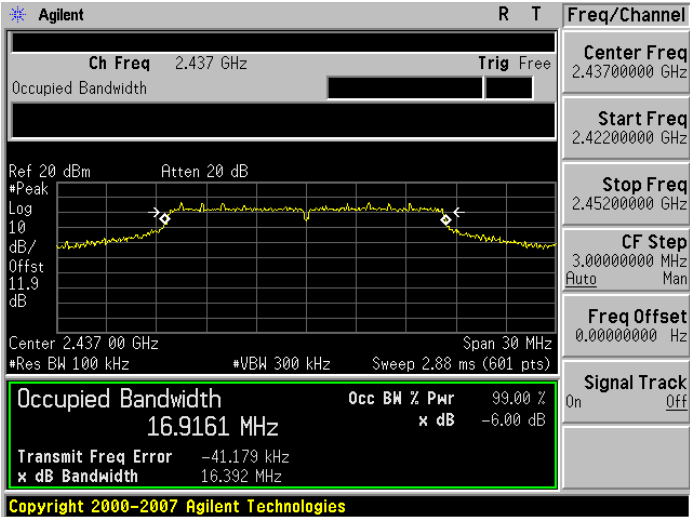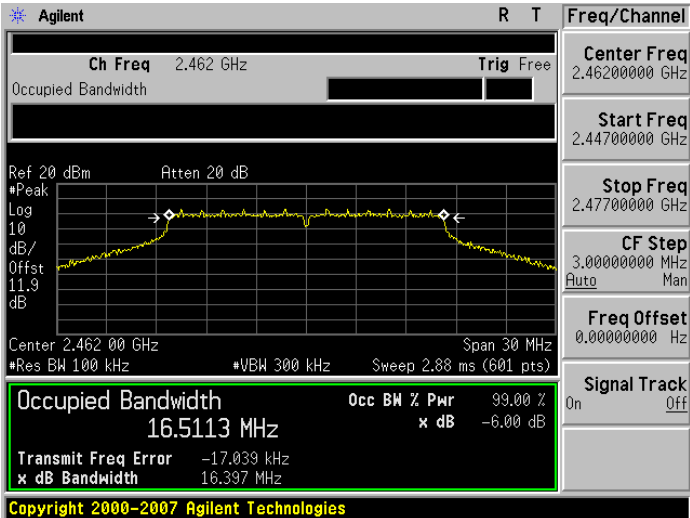2412	 Agilent R T Freq/Channel Ch Freq 2.412 GHz Trig Free Center Freq 2.41200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.42700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 11.9 dB Center 2.412 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 16.5155 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -21.031 kHz x dB Bandwidth 16.402 MHz Copyright 2000-2007 Agilent Technologies
2437	 Agilent R T Freq/Channel Ch Freq 2.437 GHz Trig Free Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 11.9 dB Center 2.437 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 16.9161 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -41.179 kHz x dB Bandwidth 16.392 MHz Copyright 2000-2007 Agilent Technologies
2462	 Agilent R T Freq/Channel Ch Freq 2.462 GHz Trig Free Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 11.9 dB Center 2.462 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 16.5113 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -17.039 kHz x dB Bandwidth 16.397 MHz Copyright 2000-2007 Agilent Technologies




Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ ANT A

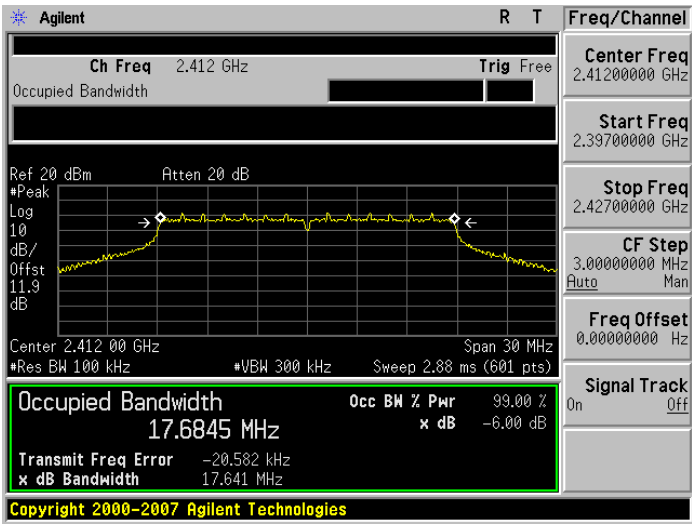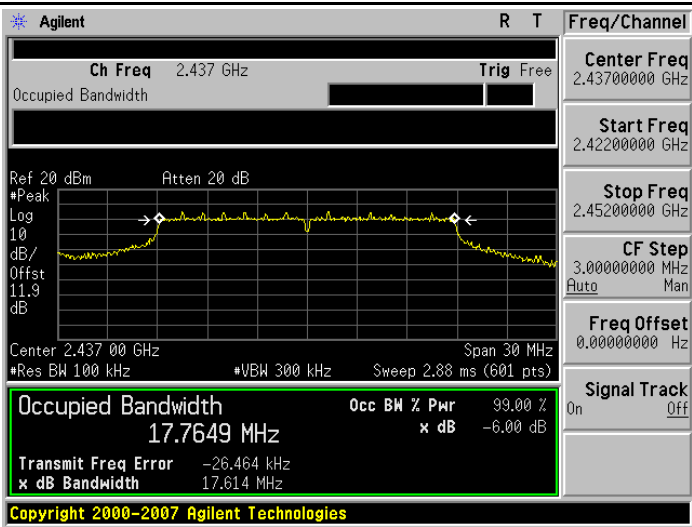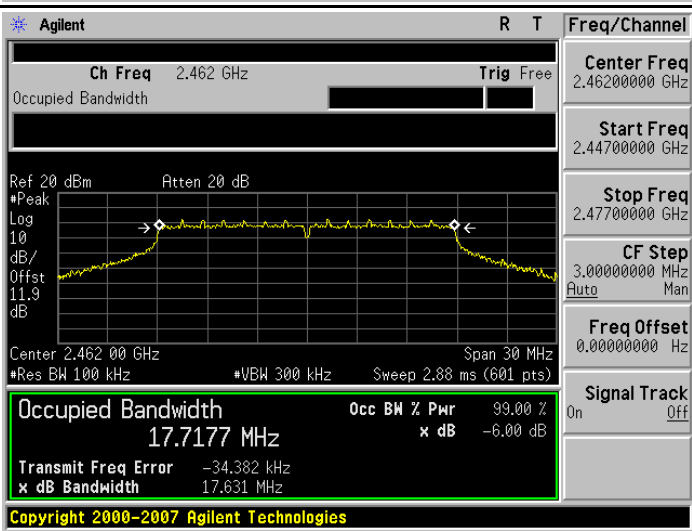2412	 Agilent R T Freq/Channel Ch Freq 2.412 GHz Trig Free Center Freq 2.41200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.42700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 11.9 dB Center 2.412 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 17.6845 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -20.582 kHz x dB Bandwidth 17.641 MHz Copyright 2000-2007 Agilent Technologies
2437	 Agilent R T Freq/Channel Ch Freq 2.437 GHz Trig Free Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 11.9 dB Center 2.437 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 17.7649 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -26.464 kHz x dB Bandwidth 17.614 MHz Copyright 2000-2007 Agilent Technologies
2462	 Agilent R T Freq/Channel Ch Freq 2.462 GHz Trig Free Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 11.9 dB Center 2.462 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 17.7177 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -34.382 kHz x dB Bandwidth 17.631 MHz Copyright 2000-2007 Agilent Technologies




Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ ANT B

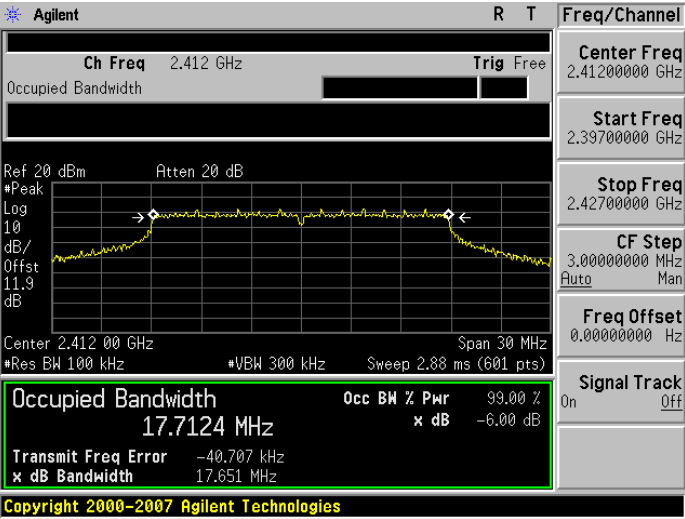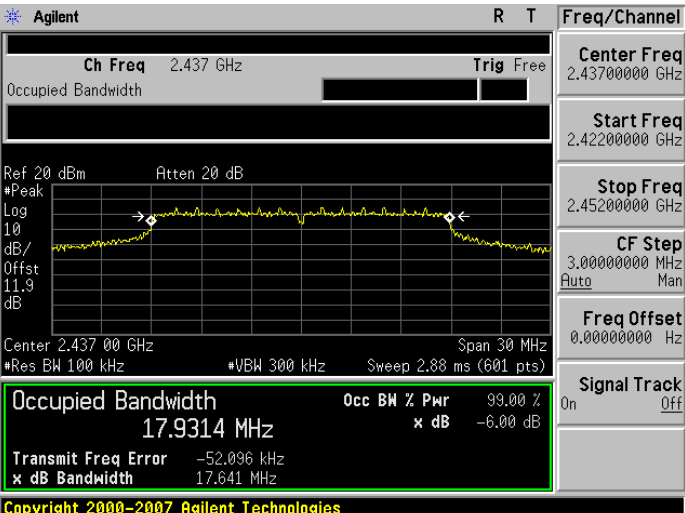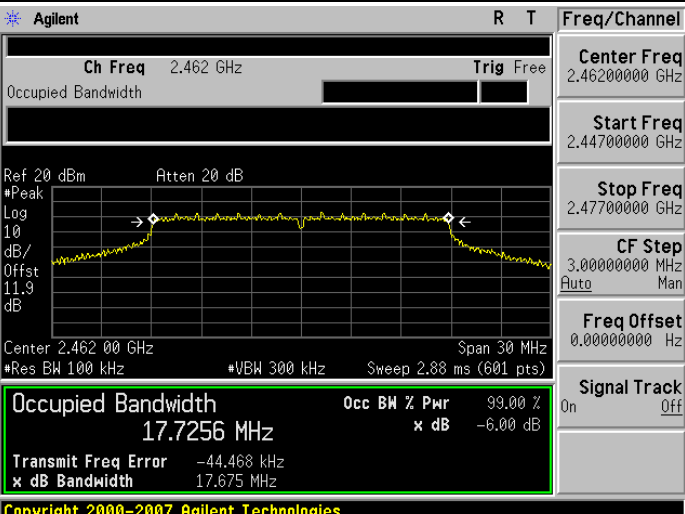2412	 Agilent R T Freq/Channel Ch Freq 2.412 GHz Trig Free Center Freq 2.41200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.42700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 11.9 dB Center 2.412 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 17.7124 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -40.707 kHz x dB Bandwidth 17.651 MHz Copyright 2000-2007 Agilent Technologies
2437	 Agilent R T Freq/Channel Ch Freq 2.437 GHz Trig Free Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 11.9 dB Center 2.437 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 17.9314 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -52.096 kHz x dB Bandwidth 17.641 MHz Copyright 2000-2007 Agilent Technologies
2462	 Agilent R T Freq/Channel Ch Freq 2.462 GHz Trig Free Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 11.9 dB Center 2.462 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 17.7256 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -44.468 kHz x dB Bandwidth 17.675 MHz Copyright 2000-2007 Agilent Technologies




Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ANT A

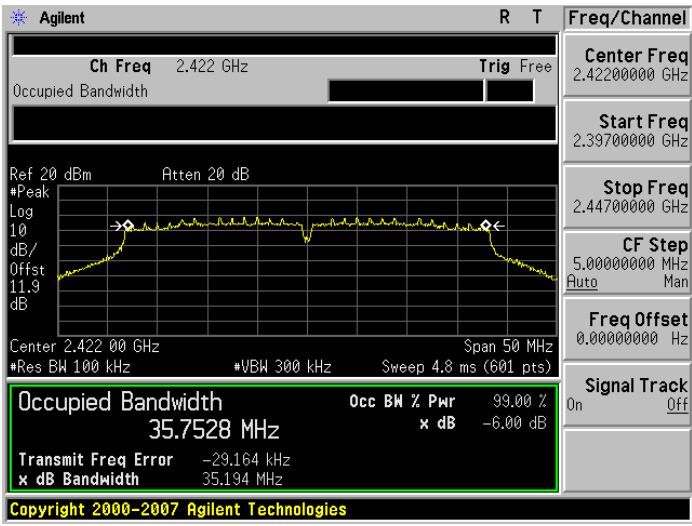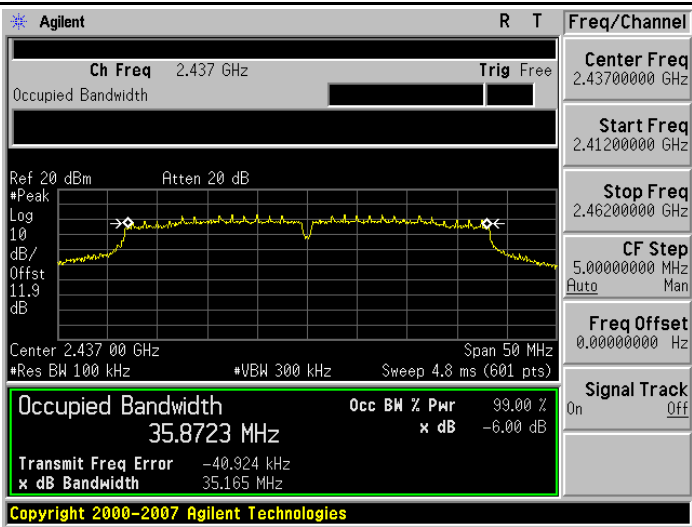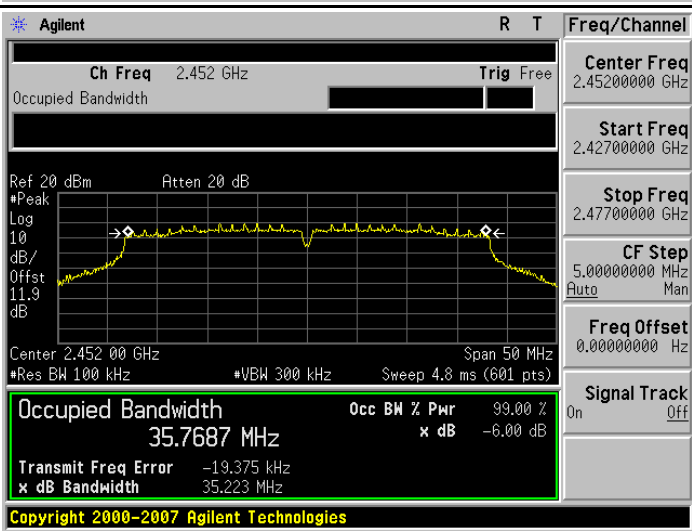2422	 Agilent R T Freq/Channel Ch Freq 2.422 GHz Trig Free Center Freq 2.42200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.44700000 GHz CF Step 5.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 11.9 dB Center 2.422 00 GHz Span 50 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts) Occupied Bandwidth 35.7528 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -29.164 kHz x dB Bandwidth 35.194 MHz Copyright 2000-2007 Agilent Technologies
2437	 Agilent R T Freq/Channel Ch Freq 2.437 GHz Trig Free Center Freq 2.43700000 GHz Start Freq 2.41200000 GHz Stop Freq 2.46200000 GHz CF Step 5.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 11.9 dB Center 2.437 00 GHz Span 50 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts) Occupied Bandwidth 35.8723 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -40.924 kHz x dB Bandwidth 35.165 MHz Copyright 2000-2007 Agilent Technologies
2452	 Agilent R T Freq/Channel Ch Freq 2.452 GHz Trig Free Center Freq 2.45200000 GHz Start Freq 2.42700000 GHz Stop Freq 2.47700000 GHz CF Step 5.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 11.9 dB Center 2.452 00 GHz Span 50 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts) Occupied Bandwidth 35.7687 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -19.375 kHz x dB Bandwidth 35.223 MHz Copyright 2000-2007 Agilent Technologies

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ANT B

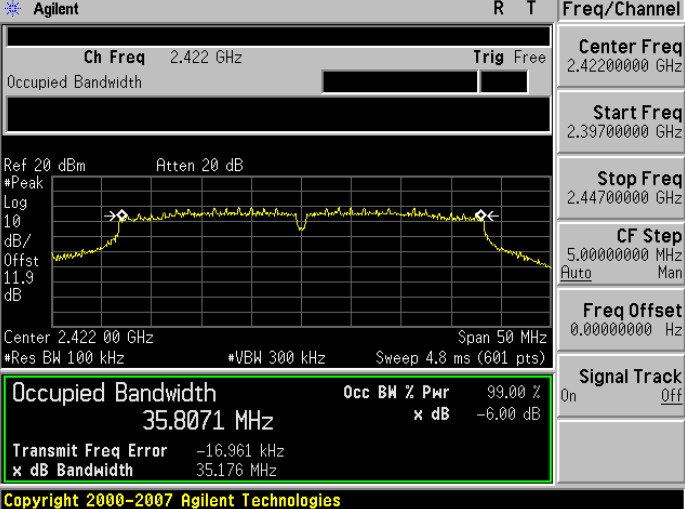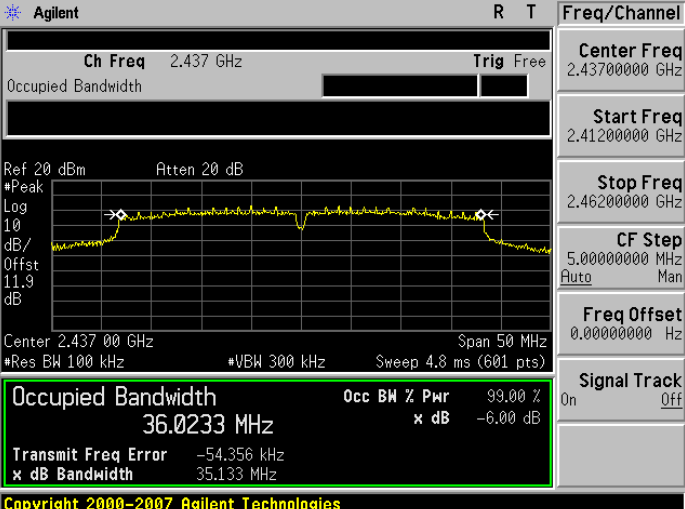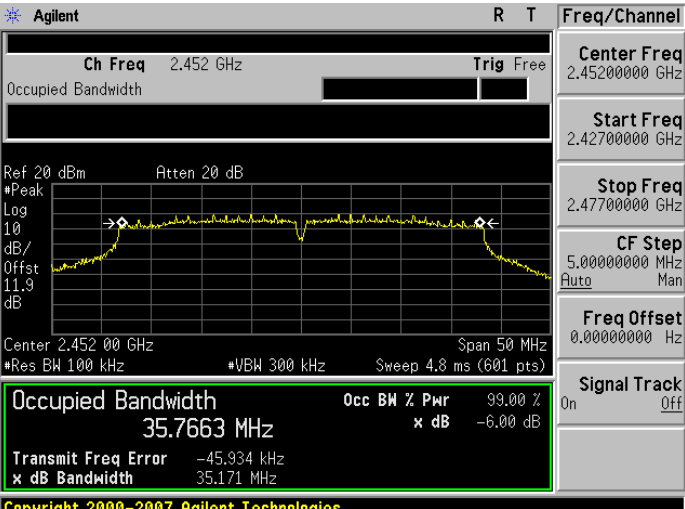2422	 Agilent R T Freq/Channel Ch Freq 2.422 GHz Trig Free Center Freq 2.42200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.44700000 GHz CF Step 5.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 11.9 dB Center 2.422 00 GHz Span 50 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts) Occupied Bandwidth 35.8071 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -16.961 kHz x dB Bandwidth 35.176 MHz Copyright 2000-2007 Agilent Technologies
2437	 Agilent R T Freq/Channel Ch Freq 2.437 GHz Trig Free Center Freq 2.43700000 GHz Start Freq 2.41200000 GHz Stop Freq 2.46200000 GHz CF Step 5.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 11.9 dB Center 2.437 00 GHz Span 50 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts) Occupied Bandwidth 36.0233 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -54.356 kHz x dB Bandwidth 35.133 MHz Copyright 2000-2007 Agilent Technologies
2452	 Agilent R T Freq/Channel Ch Freq 2.452 GHz Trig Free Center Freq 2.45200000 GHz Start Freq 2.42700000 GHz Stop Freq 2.47700000 GHz CF Step 5.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 11.9 dB Center 2.452 00 GHz Span 50 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts) Occupied Bandwidth 35.7663 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -45.934 kHz x dB Bandwidth 35.171 MHz Copyright 2000-2007 Agilent Technologies

Mode 6: Bluetooth v4.0 LE Link Mode

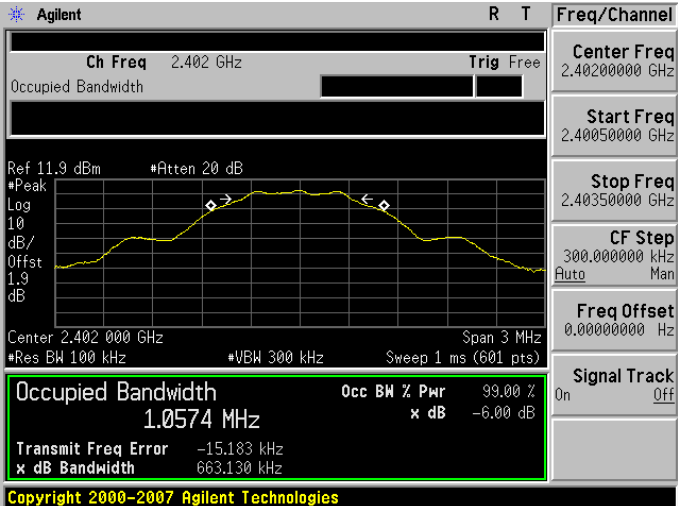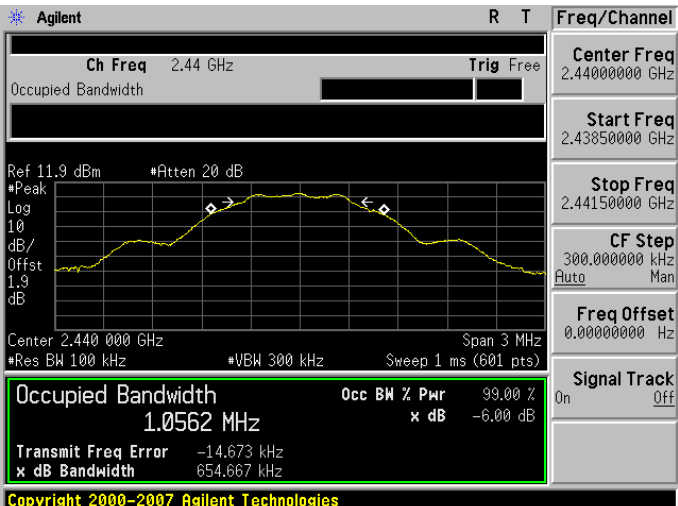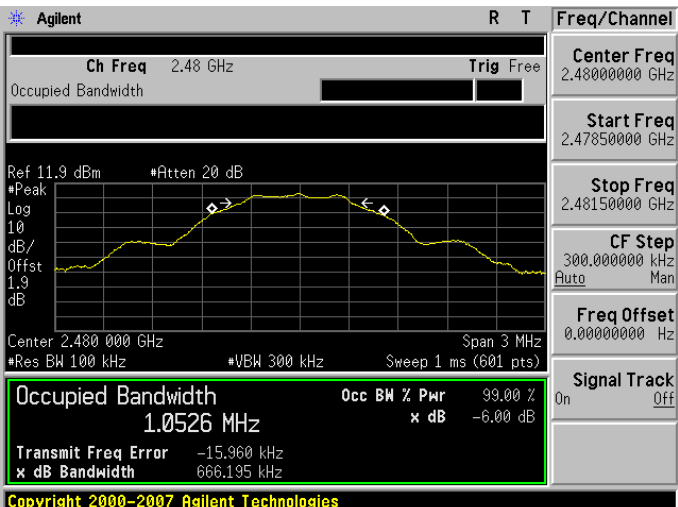
2402	 Copyright 2000-2007 Agilent Technologies
2440	 Copyright 2000-2007 Agilent Technologies
2480	 Copyright 2000-2007 Agilent Technologies

8 Maximum Power Density Measurement

8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.2. Test Setup

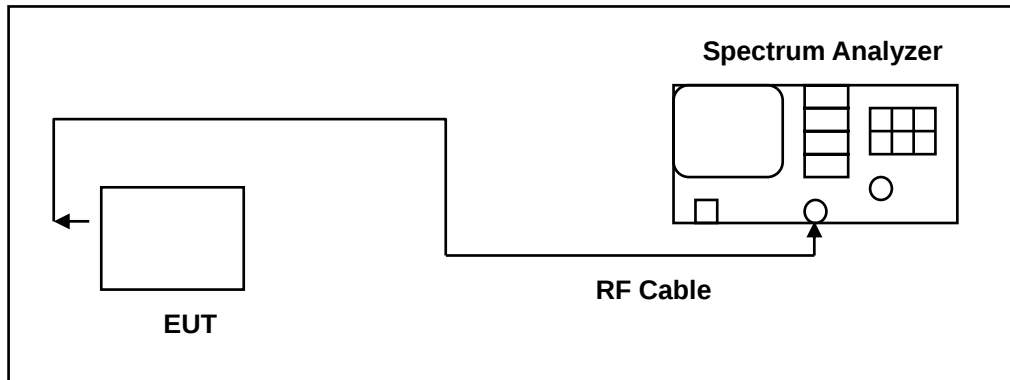

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

8.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

8.5. Test Result

Model Number	S10		
Test Item	Maximum Power Density		
Test Mode	Mode 2: IEEE 802.11b Link Mode		
Date of Test	11/18/2013	Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)		Limit (dBm)
2412	-8.66		< 8
2437	-8.36		< 8
2462	-8.13		< 8




Model Number	S10		
Test Item	Maximum Power Density		
Test Mode	Mode 3: IEEE 802.11g Link Mode		
Date of Test	11/18/2013	Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)		Limit (dBm)
2412	-11.77		< 8
2437	-8.81		< 8
2462	-12.02		< 8

Model Number	S10			
Test Item	Maximum Power Density			
Test Mode	Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode			
Date of Test	11/18/2013		Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)			Limit (dBm)
	ANTA	ANTB	ANTA + B	
2412	-12.60	-12.58	-9.58	< 8
2437	-9.46	-10.85	-7.09	< 8
2462	-11.59	-10.67	-8.10	< 8

Model Number	S10			
Test Item	Maximum Power Density			
Test Mode	Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode			
Date of Test	11/18/2013	Test Site	TE05	
Frequency (MHz)	Reading (dBm/3KHz)			Limit (dBm)
	ANTA	ANTB	ANTA + B	
2422	-16.13	-16.83	-13.46	< 8
2437	-11.48	-11.79	-8.62	< 8
2452	-15.92	-15.16	-12.51	< 8


Model Number	S10		
Test Item	Maximum Power Density		
Test Mode	Mode 6: Bluetooth v4.0 LE Link Mode		
Date of Test	11/15/2013	Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)		Limit (dBm)
2402	-10.66		< 8
2440	-10.46		< 8
2480	-10.08		< 8

8.6. Test Graphs

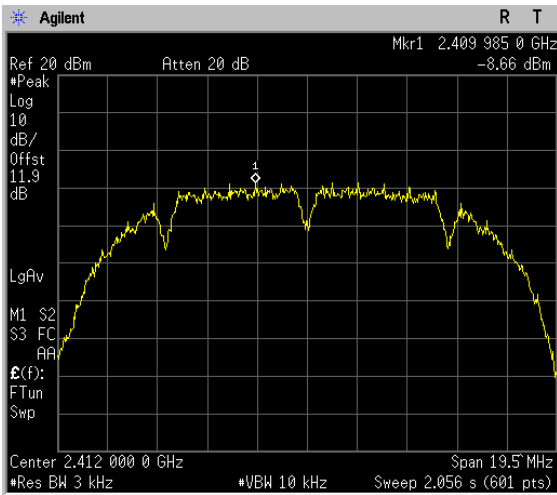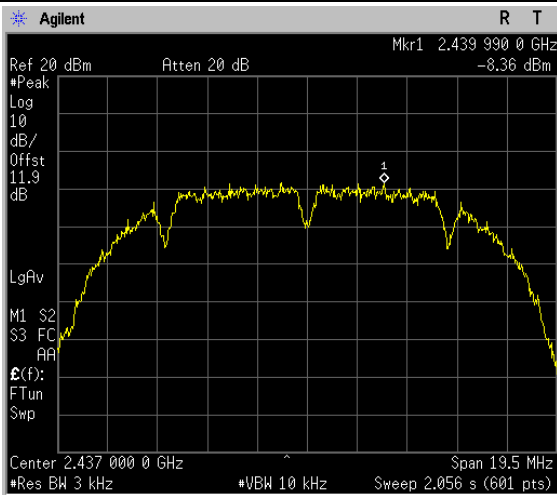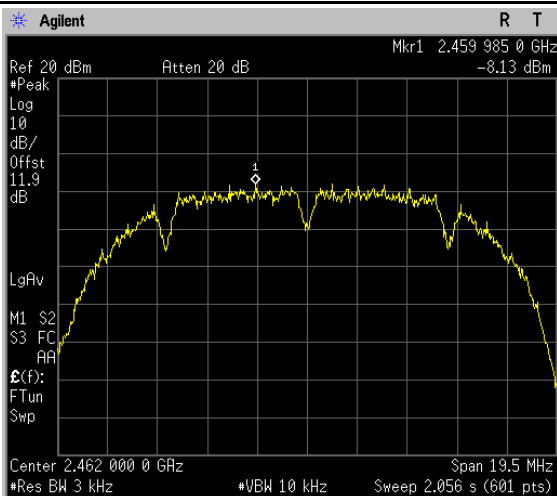
Mode 2: IEEE 802.11b Link Mode	
2412	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 2.409 985 0 GHz -8.66 dBm #Peak Log 10 dB/ Offst 11.9 dB LgAv M1 S2 S3 FC AA E(f): FTun Swp Center 2.412 000 0 GHz Span 19.5 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.056 s (601 pts) Copyright 2000-2007 Agilent Technologies Center Freq 2.41200000 GHz Start Freq 2.40225000 GHz Stop Freq 2.42175000 GHz CF Step 1.95000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2437	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 2.439 990 0 GHz -8.36 dBm #Peak Log 10 dB/ Offst 11.9 dB LgAv M1 S2 S3 FC AA E(f): FTun Swp Center 2.437 000 0 GHz Span 19.5 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.056 s (601 pts) Copyright 2000-2007 Agilent Technologies Center Freq 2.43700000 GHz Start Freq 2.42725000 GHz Stop Freq 2.44675000 GHz CF Step 1.95000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2462	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 2.459 985 0 GHz -8.13 dBm #Peak Log 10 dB/ Offst 11.9 dB LgAv M1 S2 S3 FC AA E(f): FTun Swp Center 2.462 000 0 GHz Span 19.5 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.056 s (601 pts) Copyright 2000-2007 Agilent Technologies Center Freq 2.46200000 GHz Start Freq 2.45225000 GHz Stop Freq 2.47175000 GHz CF Step 1.95000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

Mode 3: IEEE 802.11g Link Mode


2412

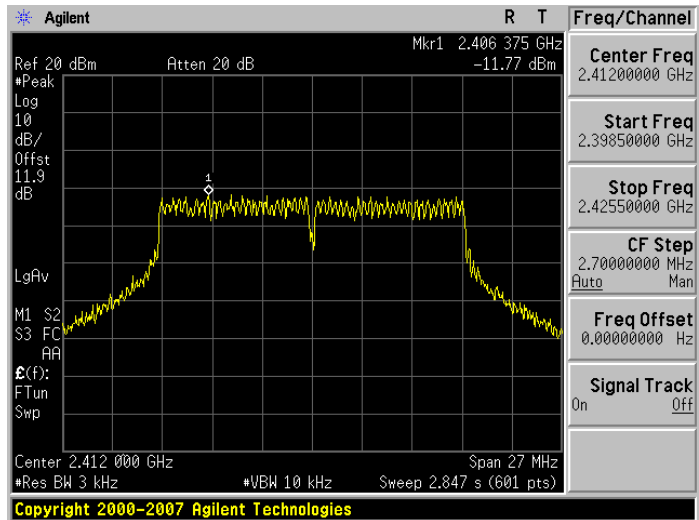




2437

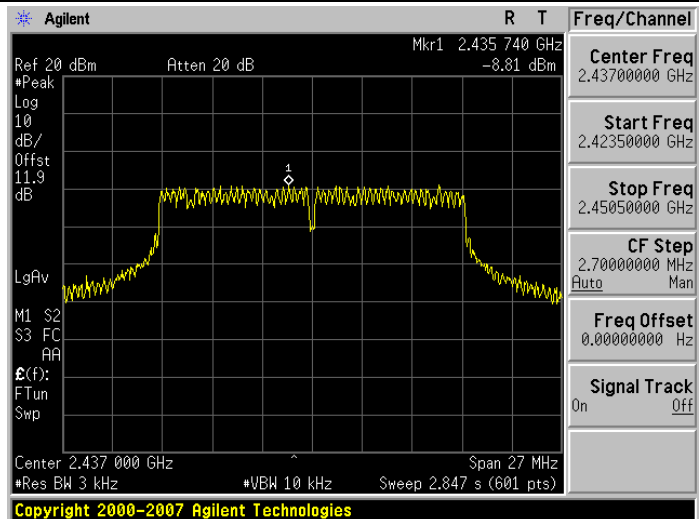




2462

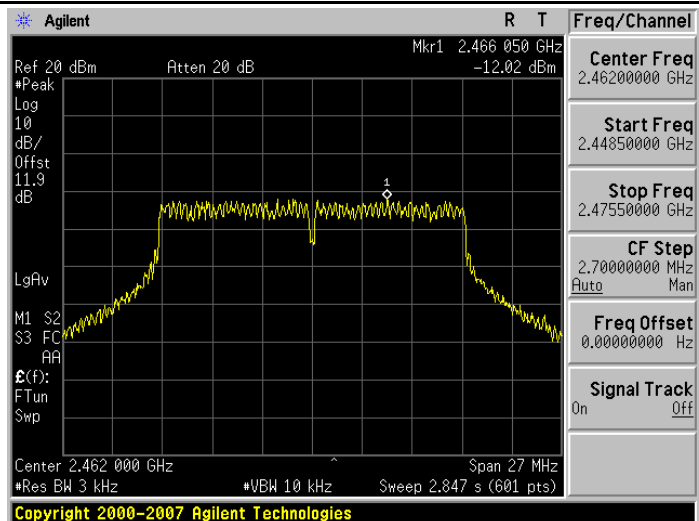

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ANT A

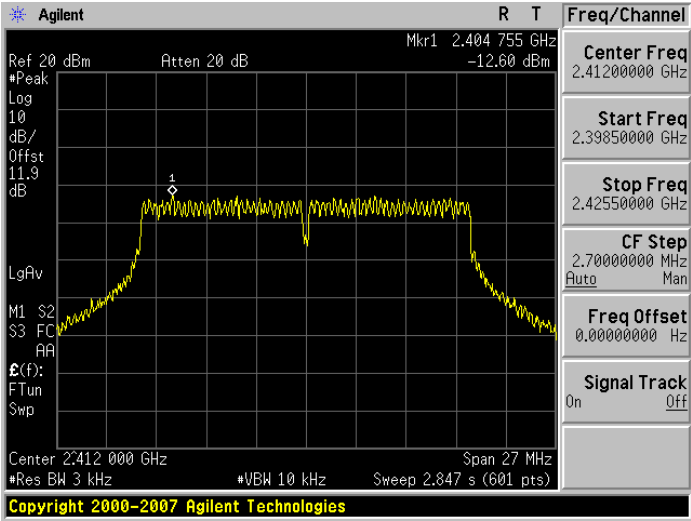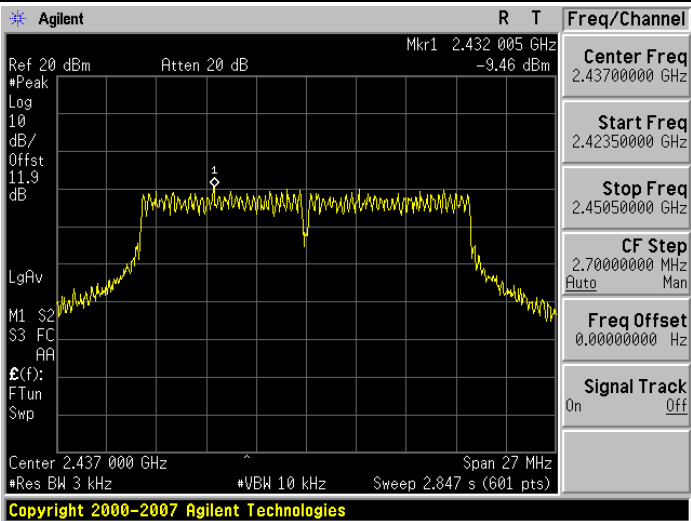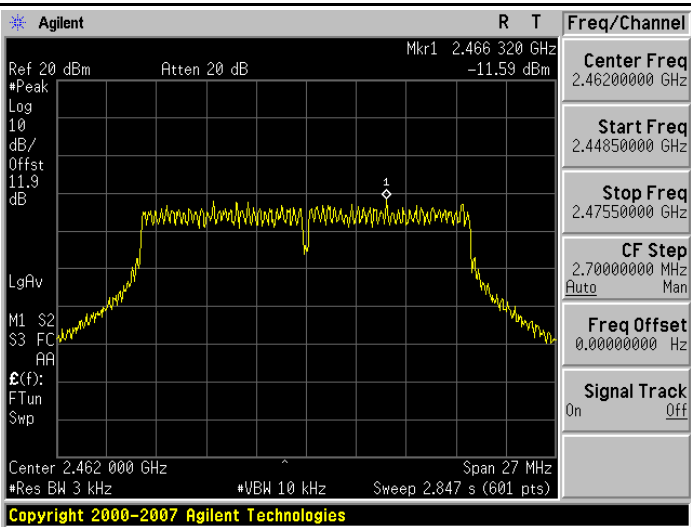
2412	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 2,404 755 GHz #Peak -12.60 dBm Log 10 dB/Offst 11.9 dB LgAv M1 S2 S3 FC AA E(f): FTun Swp Center 2,412 000 GHz Span 27 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.847 s (601 pts) Copyright 2000-2007 Agilent Technologies Center Freq 2,412 000 000 GHz Start Freq 2,398 500 000 GHz Stop Freq 2,425 500 000 GHz CF Step 2,700 000 000 MHz Auto Man Freq Offset 0.000 000 000 Hz Signal Track On Off
2437	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 2,432 005 GHz #Peak -9.46 dBm Log 10 dB/Offst 11.9 dB LgAv M1 S2 S3 FC AA E(f): FTun Swp Center 2,437 000 GHz Span 27 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.847 s (601 pts) Copyright 2000-2007 Agilent Technologies Center Freq 2,437 000 000 GHz Start Freq 2,423 500 000 GHz Stop Freq 2,450 500 000 GHz CF Step 2,700 000 000 MHz Auto Man Freq Offset 0.000 000 000 Hz Signal Track On Off
2462	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 2,466 320 GHz #Peak -11.59 dBm Log 10 dB/Offst 11.9 dB LgAv M1 S2 S3 FC AA E(f): FTun Swp Center 2,462 000 GHz Span 27 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.847 s (601 pts) Copyright 2000-2007 Agilent Technologies Center Freq 2,462 000 000 GHz Start Freq 2,448 500 000 GHz Stop Freq 2,475 500 000 GHz CF Step 2,700 000 000 MHz Auto Man Freq Offset 0.000 000 000 Hz Signal Track On Off

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ANT B

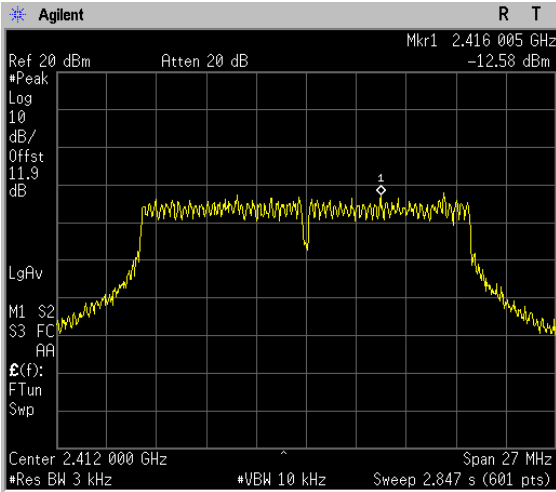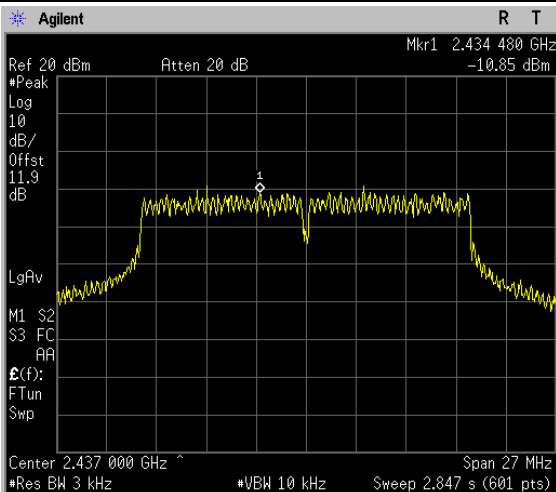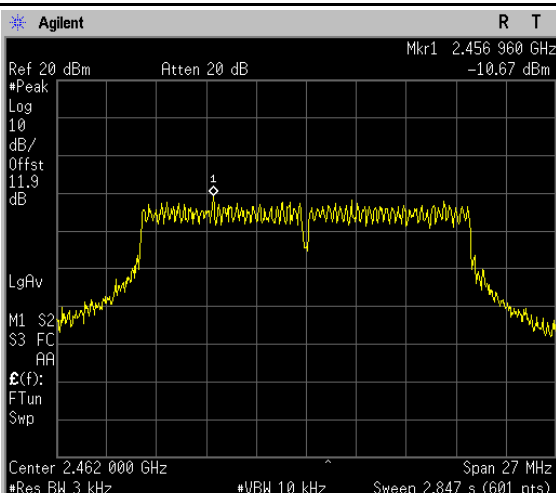
2412	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 2.416 005 GHz #Peak -12.58 dBm Log 10 dB/Offst 11.9 dB LgAv M1 S2 S3 FC AA E(f): FTun Swp Center 2.412 000 GHz Span 27 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.847 s (601 pts) Copyright 2000-2007 Agilent Technologies Center Freq 2.41200000 GHz Start Freq 2.39850000 GHz Stop Freq 2.42550000 GHz CF Step 2.70000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2437	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 2.434 480 GHz #Peak -10.85 dBm Log 10 dB/Offst 11.9 dB LgAv M1 S2 S3 FC AA E(f): FTun Swp Center 2.437 000 GHz Span 27 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.847 s (601 pts) Copyright 2000-2007 Agilent Technologies Center Freq 2.43700000 GHz Start Freq 2.42350000 GHz Stop Freq 2.45050000 GHz CF Step 2.70000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2462	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 2.456 960 GHz #Peak -10.67 dBm Log 10 dB/Offst 11.9 dB LgAv M1 S2 S3 FC AA E(f): FTun Swp Center 2.462 000 GHz Span 27 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.847 s (601 pts) Copyright 2000-2007 Agilent Technologies Center Freq 2.46200000 GHz Start Freq 2.44850000 GHz Stop Freq 2.47550000 GHz CF Step 2.70000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ANT A


2422

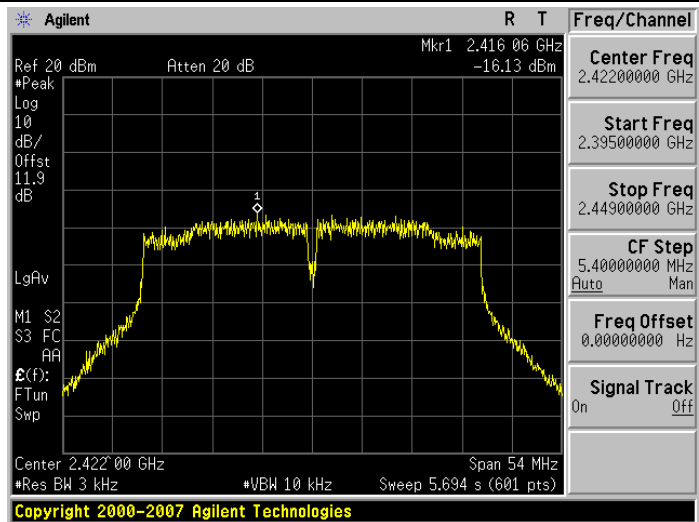




2437

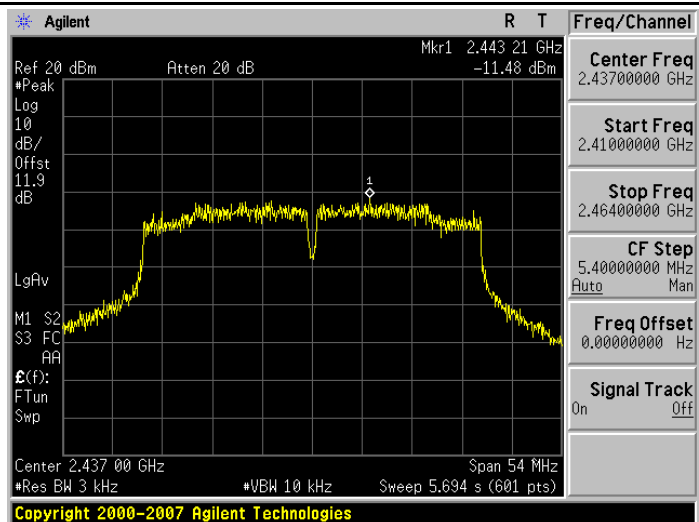




2452

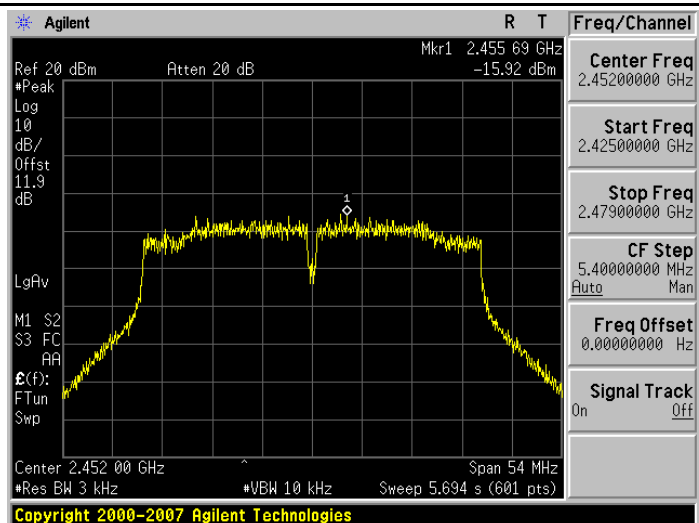

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ANT B

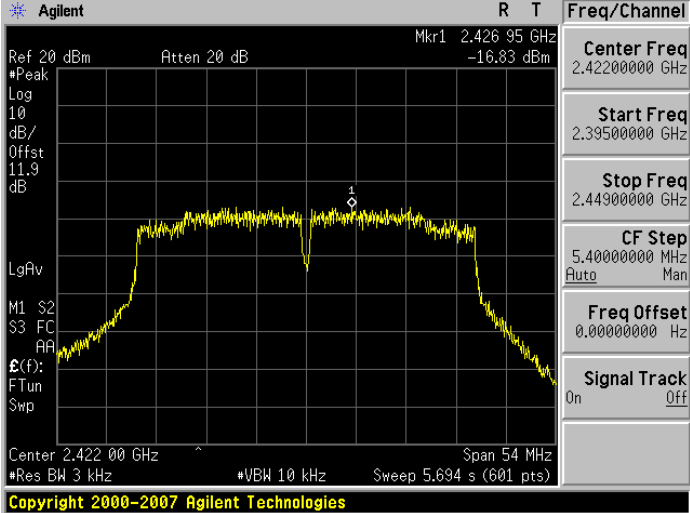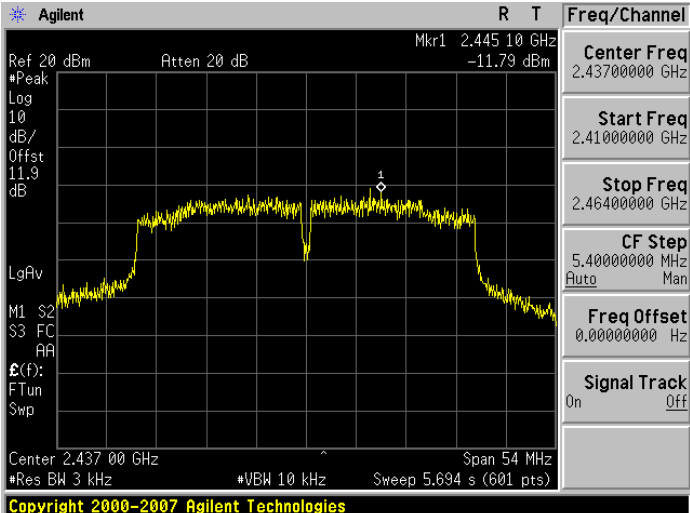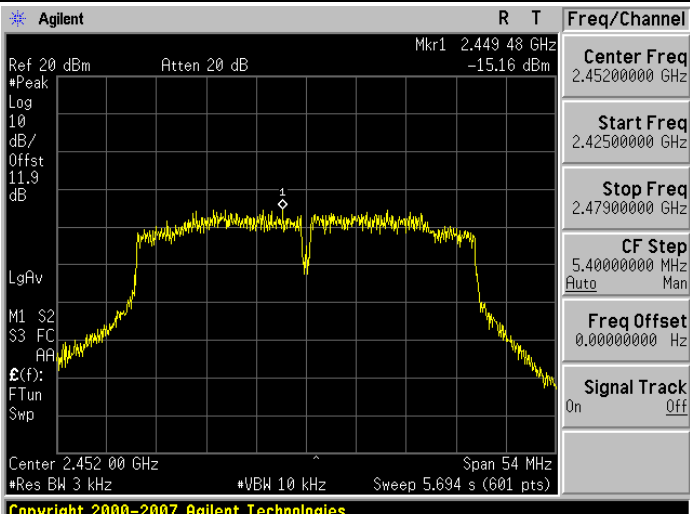2422	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 2.426 95 GHz #Peak -16.83 dBm Log 10 dB/ Offst 11.9 dB LgAv M1 S2 S3 FC AA E(f): FTun Swp Center 2.422 00 GHz Span 54 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.694 s (601 pts) Copyright 2000-2007 Agilent Technologies Center Freq 2.42200000 GHz Start Freq 2.39500000 GHz Stop Freq 2.44900000 GHz CF Step 5.40000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2437	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 2.445 10 GHz #Peak -11.79 dBm Log 10 dB/ Offst 11.9 dB LgAv M1 S2 S3 FC AA E(f): FTun Swp Center 2.437 00 GHz Span 54 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.694 s (601 pts) Copyright 2000-2007 Agilent Technologies Center Freq 2.43700000 GHz Start Freq 2.41000000 GHz Stop Freq 2.46400000 GHz CF Step 5.40000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2452	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 2.449 48 GHz #Peak -15.16 dBm Log 10 dB/ Offst 11.9 dB LgAv M1 S2 S3 FC AA E(f): FTun Swp Center 2.452 00 GHz Span 54 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.694 s (601 pts) Copyright 2000-2007 Agilent Technologies Center Freq 2.45200000 GHz Start Freq 2.42500000 GHz Stop Freq 2.47900000 GHz CF Step 5.40000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

Mode 6: Bluetooth v4.0 LE Link Mode

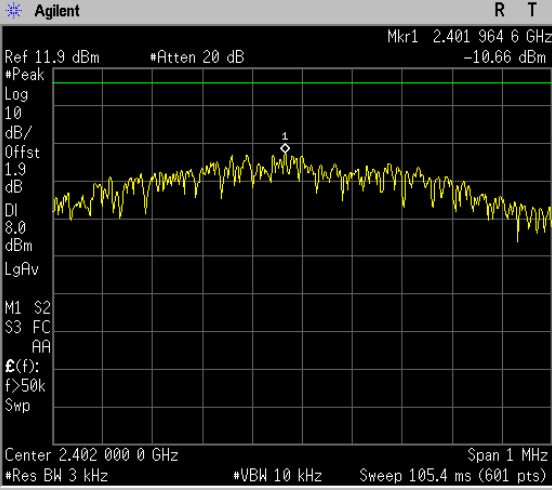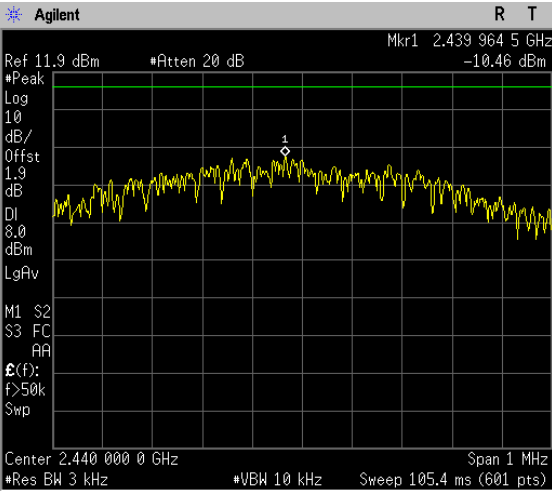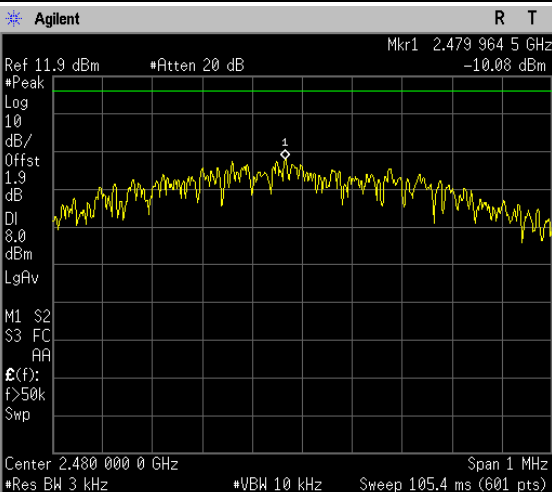
2402	 Copyright 2000-2007 Agilent Technologies
2440	 Copyright 2000-2007 Agilent Technologies
2480	 Copyright 2000-2007 Agilent Technologies

9 Out of Band Conducted Emissions Measurement

9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

9.2. Test Setup

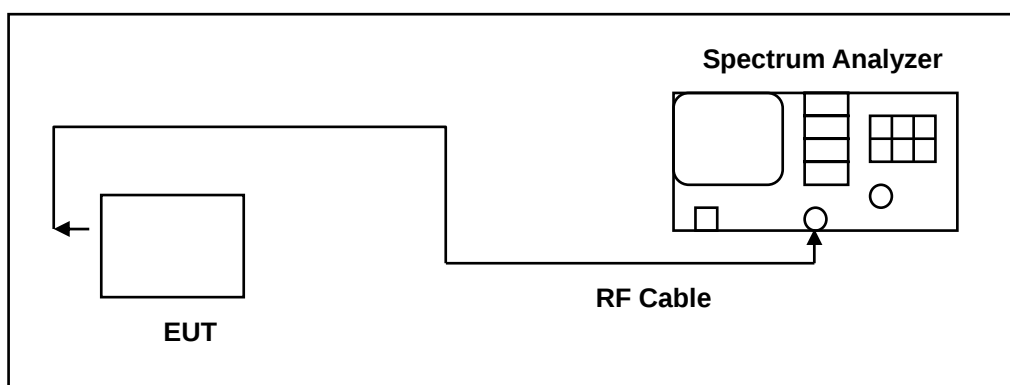

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/11/2013	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

9.4. Test Procedure




In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band.

The test was performed at 3 channels (Channel 1, 6, 11)


9.5. Test Graphs

Reference level

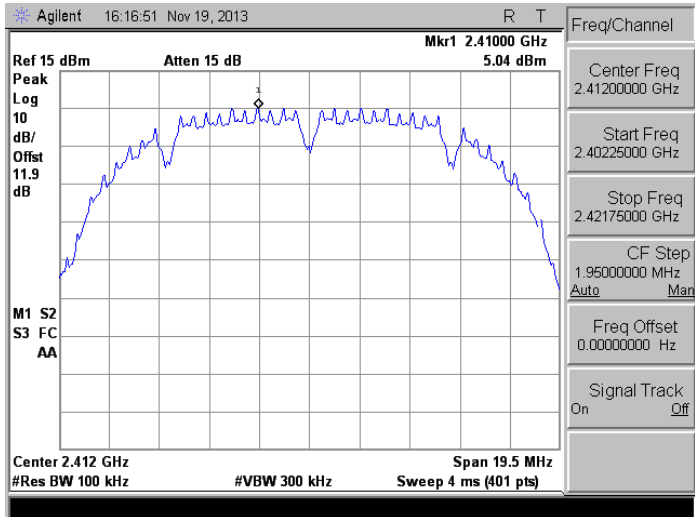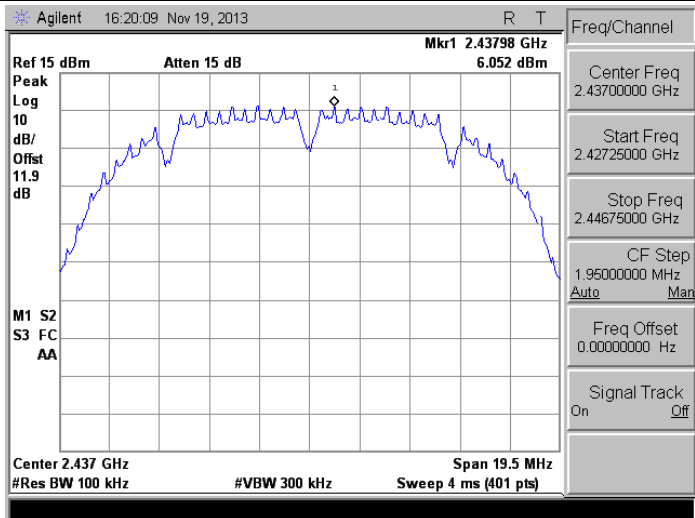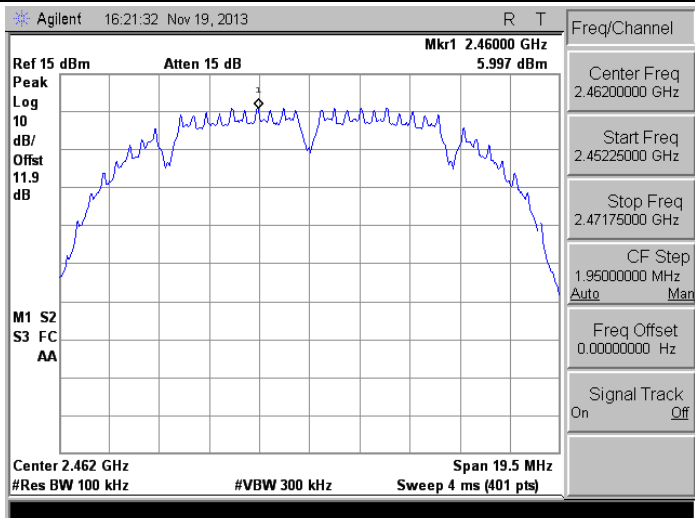
Mode 2: IEEE 802.11b Link Mode	
2412	
2437	
2462	

Mode 3: IEEE 802.11g Link Mode


2412

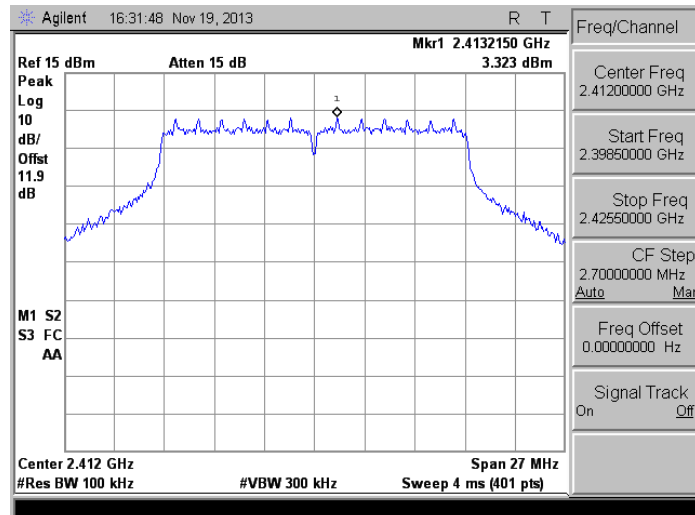

2437

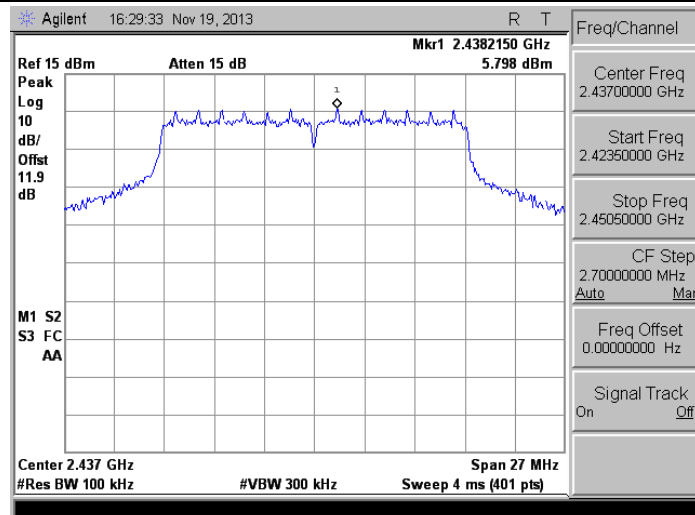


2462

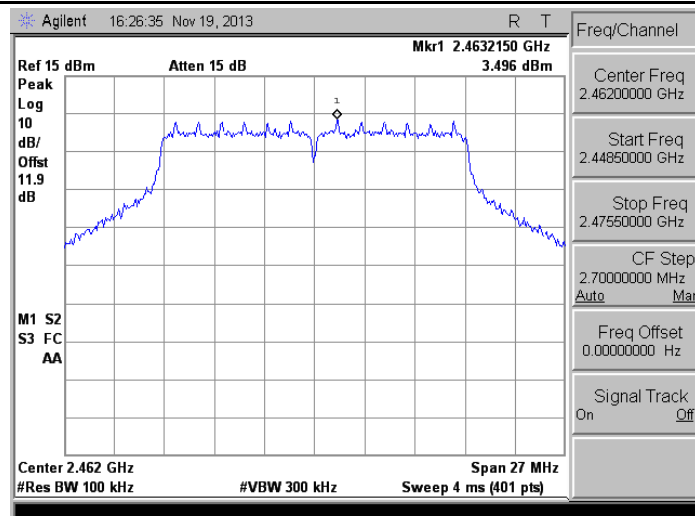


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ANT A


2412

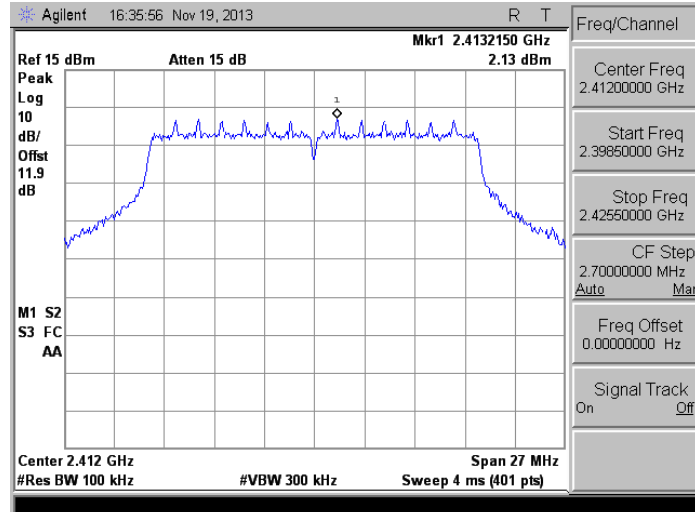

2437

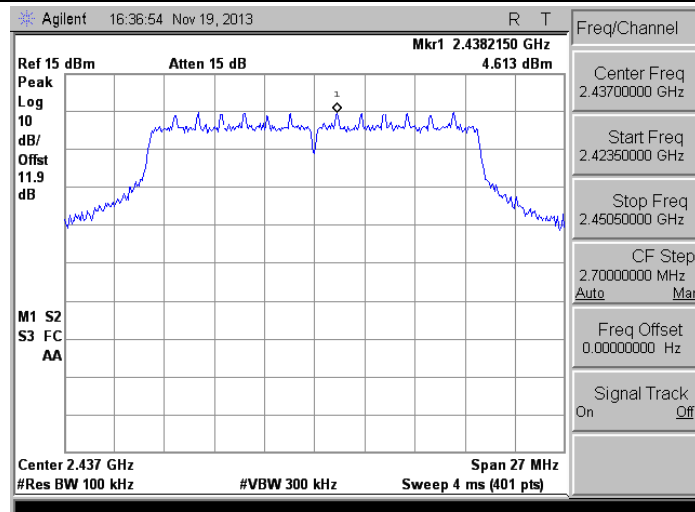


2462

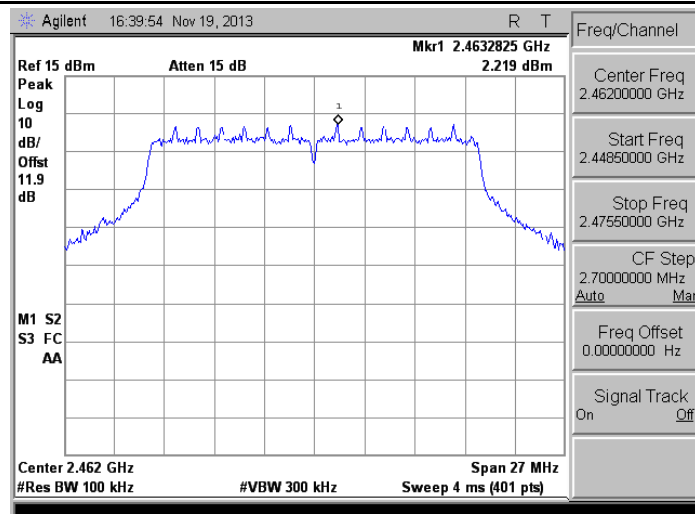


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ANT B


2412

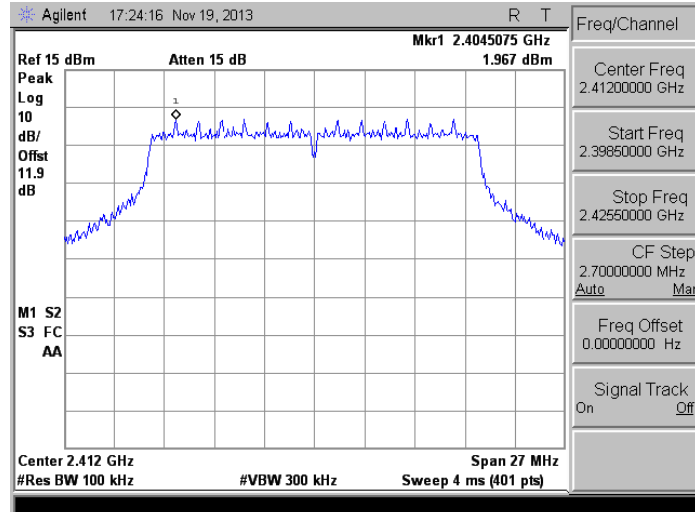

2437

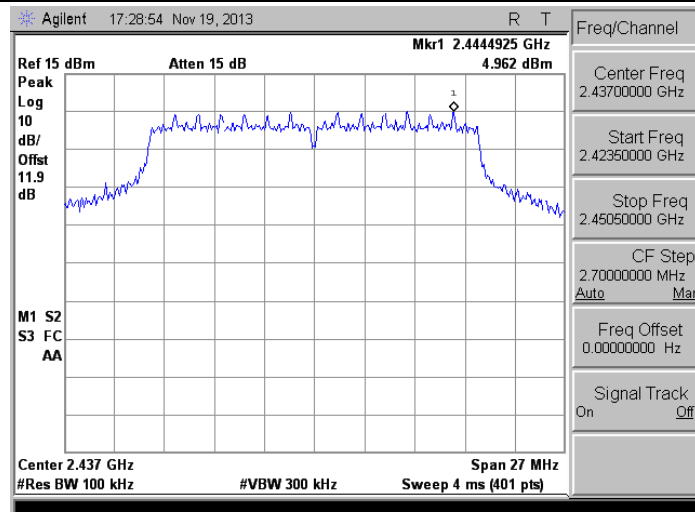


2462

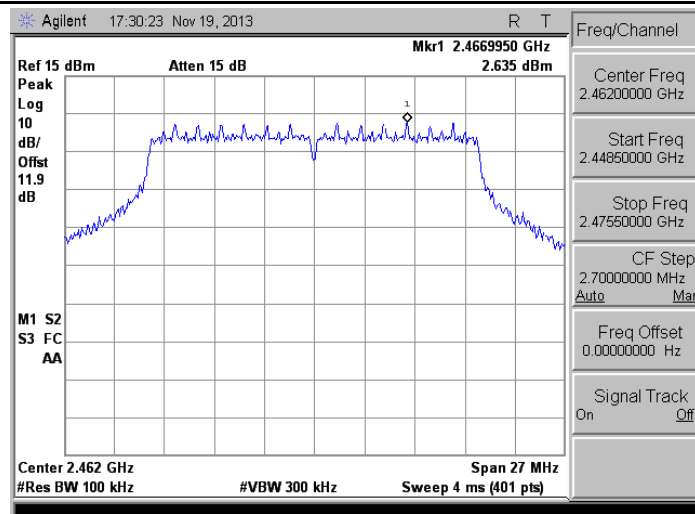


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ANT A


2422

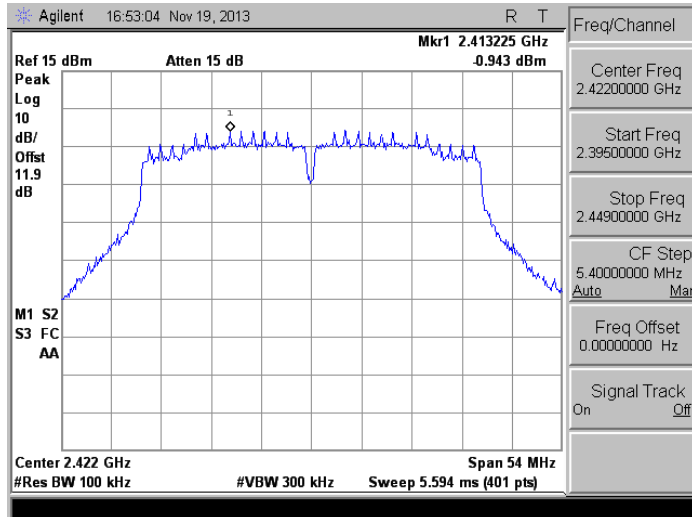




2437

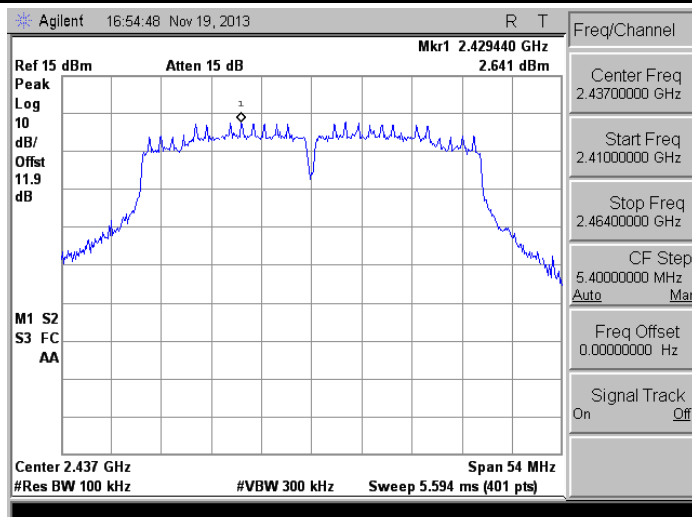

2452

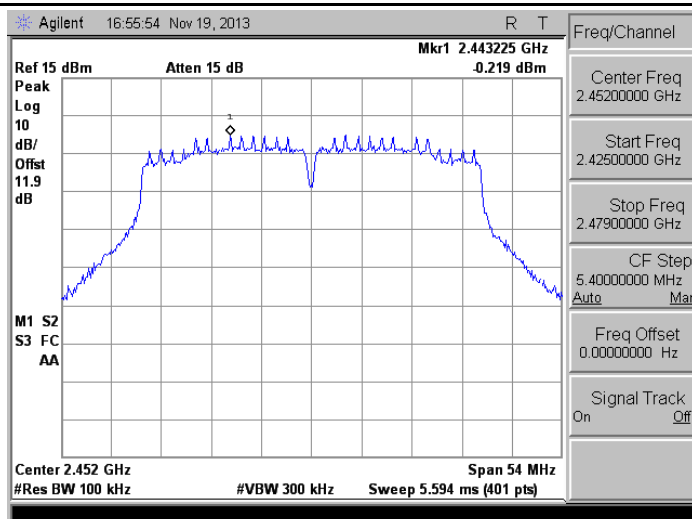

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ANT B

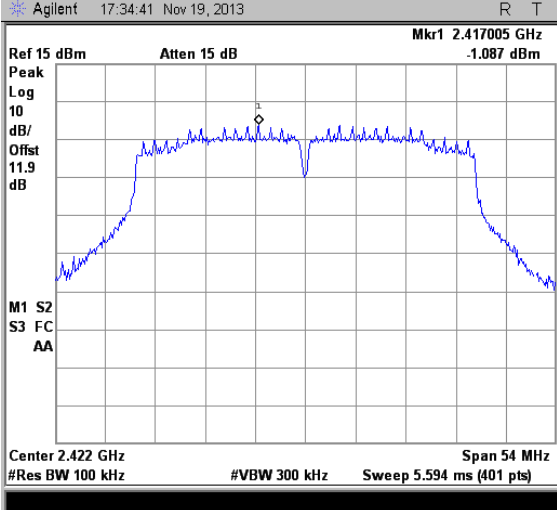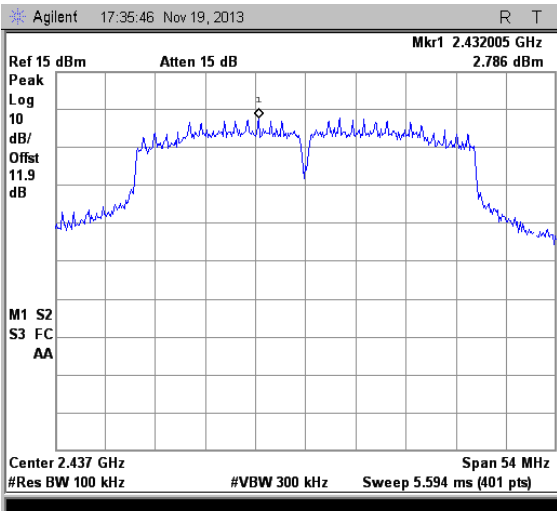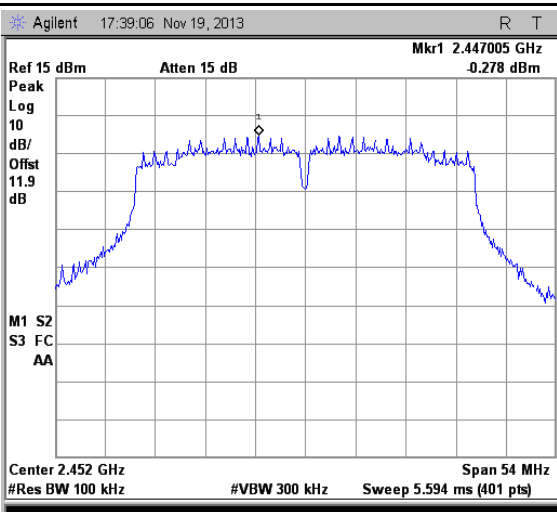2422	 Agilent 17:34:41 Nov 19, 2013 Ref 15 dBm Atten 15 dB Mkr1 2.417005 GHz -1.087 dBm Center 2.422 GHz Span 54 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5.594 ms (401 pts) Freq/Channel Center Freq 2.4220000 GHz Start Freq 2.3950000 GHz Stop Freq 2.4490000 GHz CF Step 5.4000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off
2437	 Agilent 17:35:46 Nov 19, 2013 Ref 15 dBm Atten 15 dB Mkr1 2.432005 GHz 2.786 dBm Center 2.437 GHz Span 54 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5.594 ms (401 pts) Freq/Channel Center Freq 2.4370000 GHz Start Freq 2.4100000 GHz Stop Freq 2.4640000 GHz CF Step 5.4000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off
2452	 Agilent 17:39:06 Nov 19, 2013 Ref 15 dBm Atten 15 dB Mkr1 2.447005 GHz -0.278 dBm Center 2.452 GHz Span 54 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5.594 ms (401 pts) Freq/Channel Center Freq 2.4520000 GHz Start Freq 2.4250000 GHz Stop Freq 2.4790000 GHz CF Step 5.4000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off

Mode 6: Bluetooth v4.0 LE 40MHz Link Mode

2402



2440



2480




Out of Band Conducted Emissions

Mode 2: IEEE 802.11b Link Mode


2412	Agilent17:14:23Nov 19, 2013R T Ref 15 dBmAtten 15 dBMkr1 2.41 GHz2.836 dBm PeakLog10dB/Offst 11.9 dBDI -15.0 dBm <
------	---

Mode 3: IEEE 802.11g Link Mode


2412

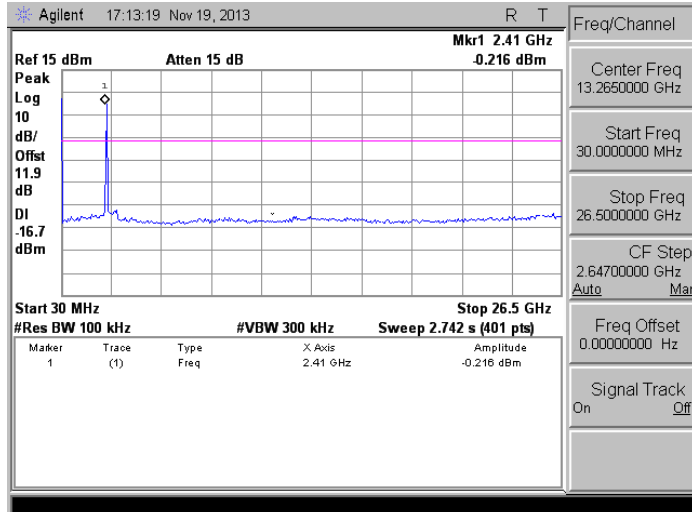

2437

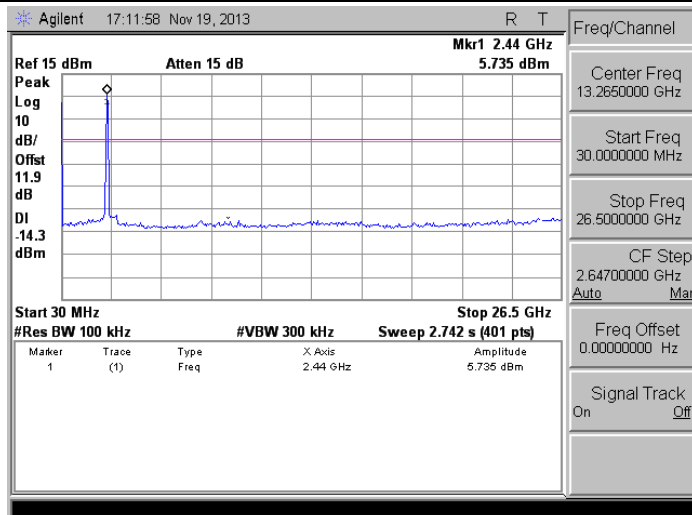


2462

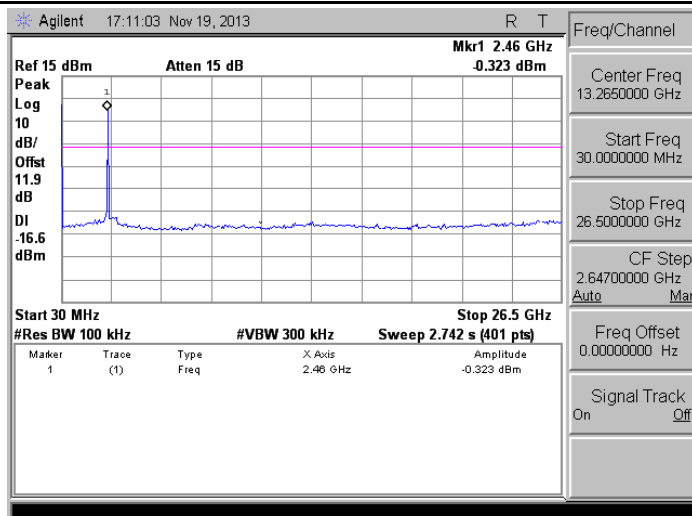


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ANT A


2412

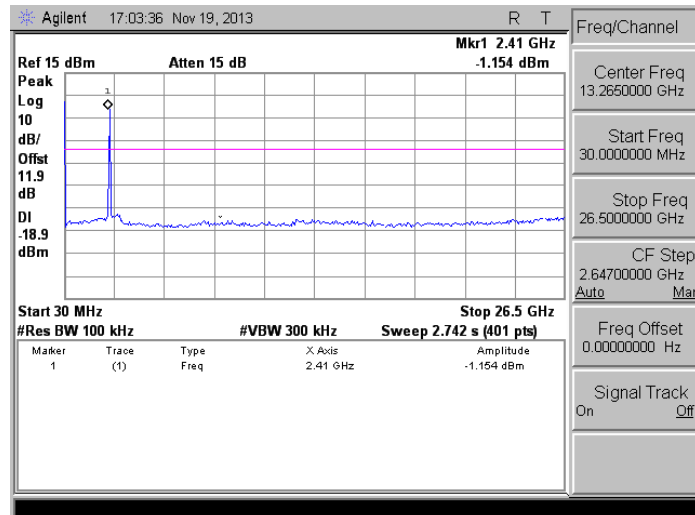

2437

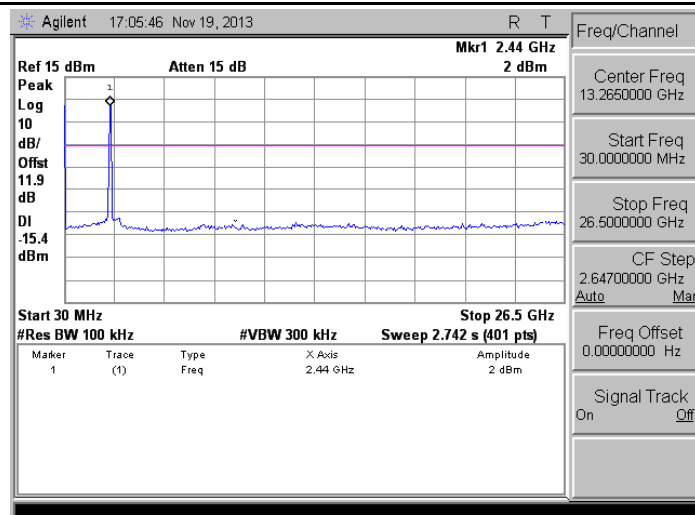


2462

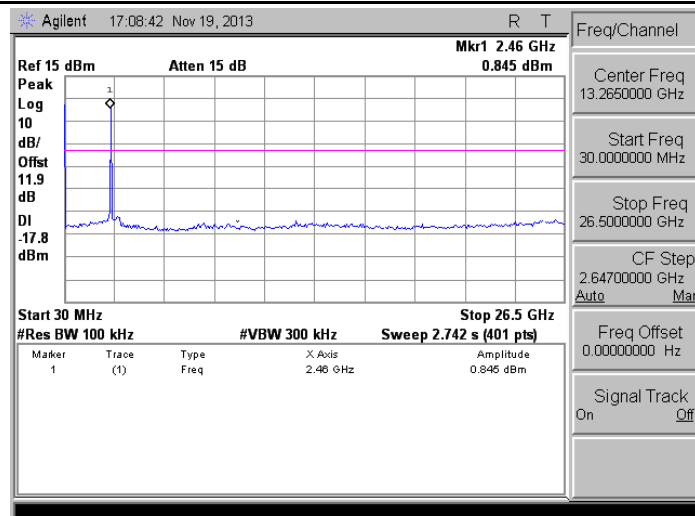


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ANT B


2412

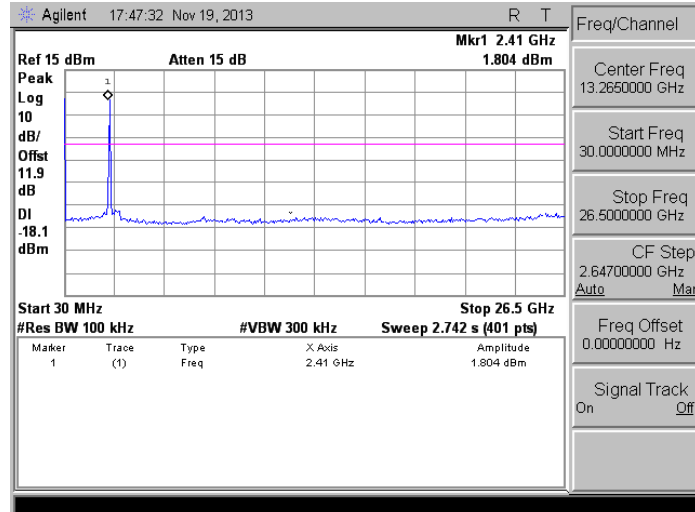

2437

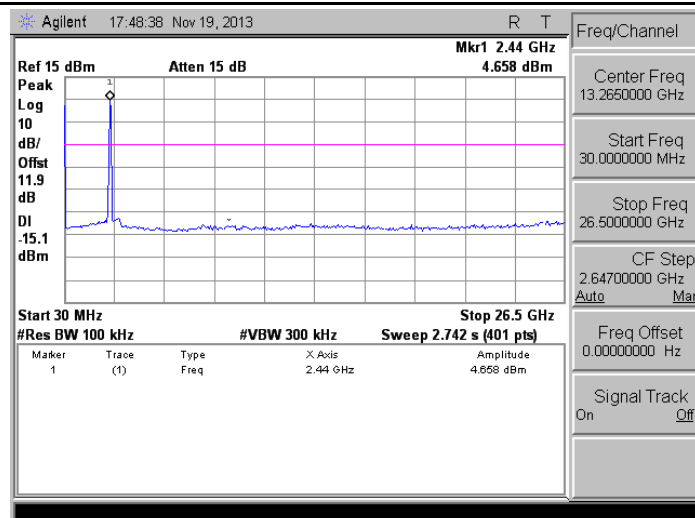


2462

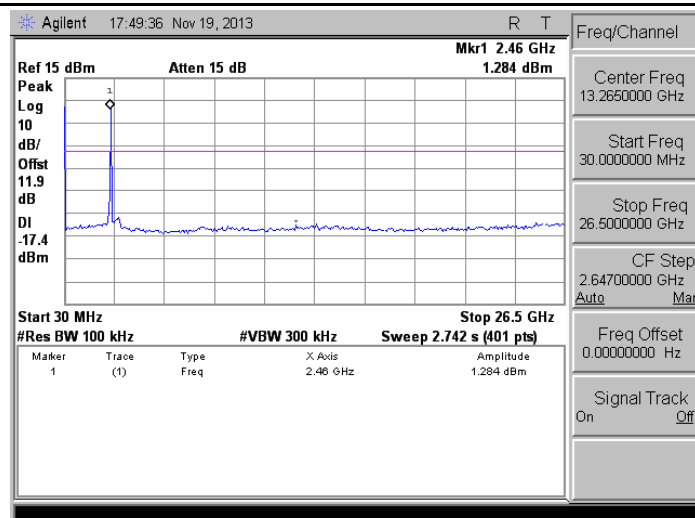


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ANT A


2422

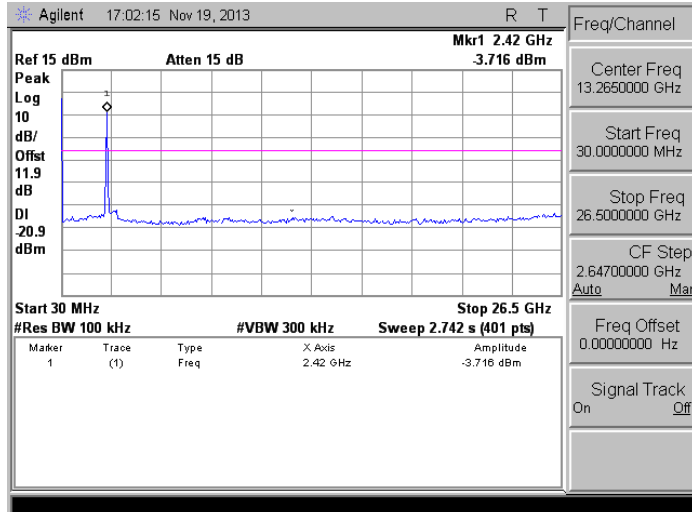

2437

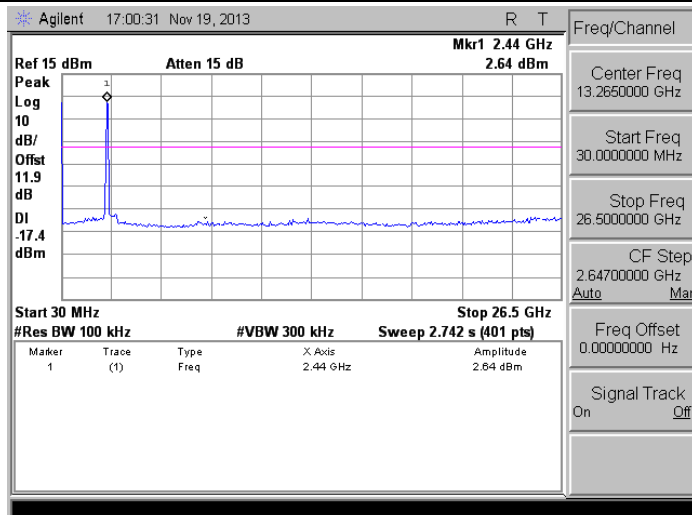


2452

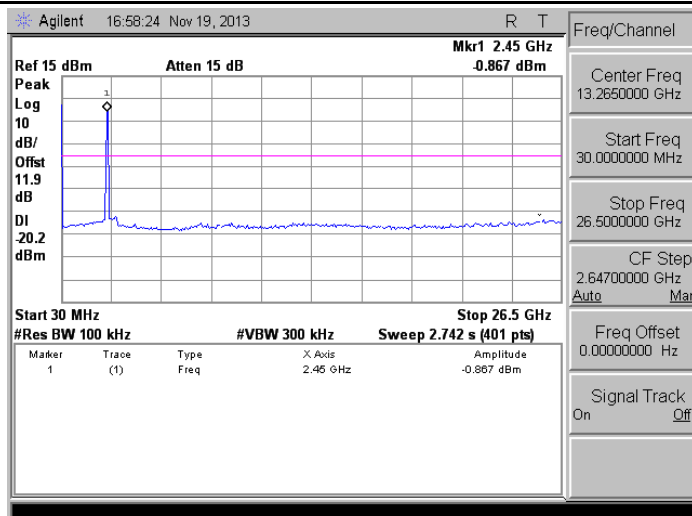


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ANT B


2422

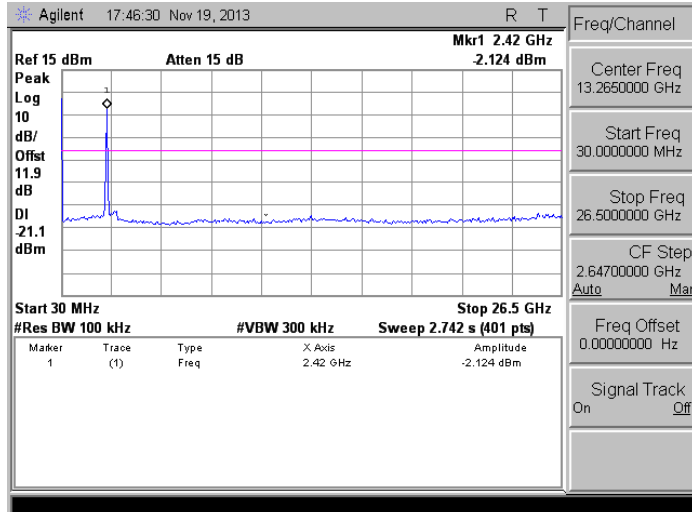

2437

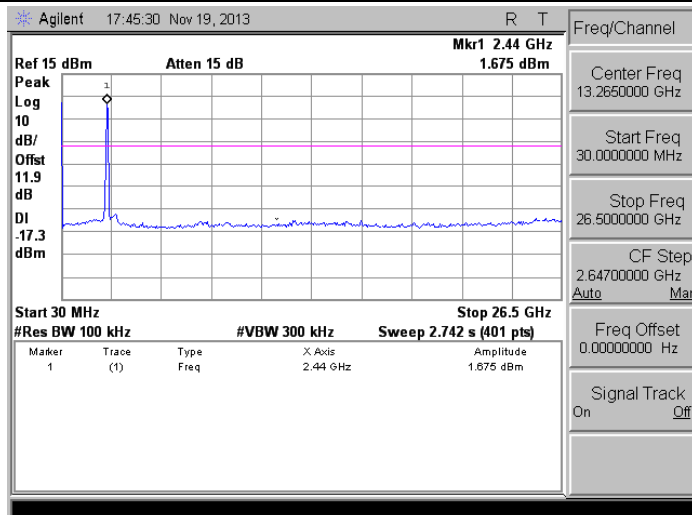


2452

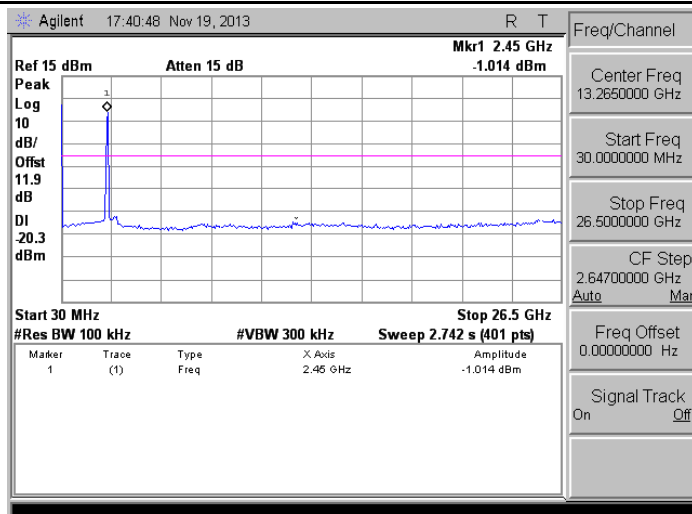


Mode 6: Bluetooth v4.0 LE Link Mode


2402

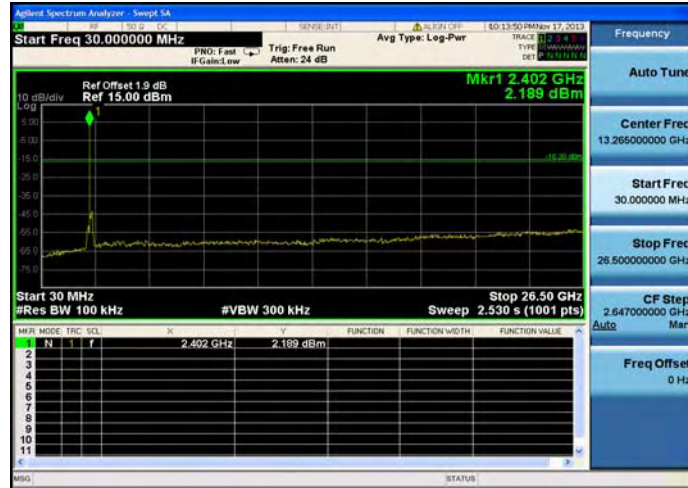

2440

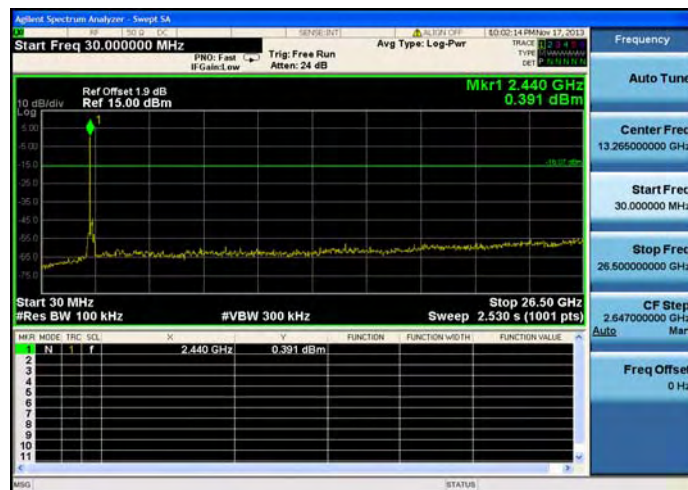


2480

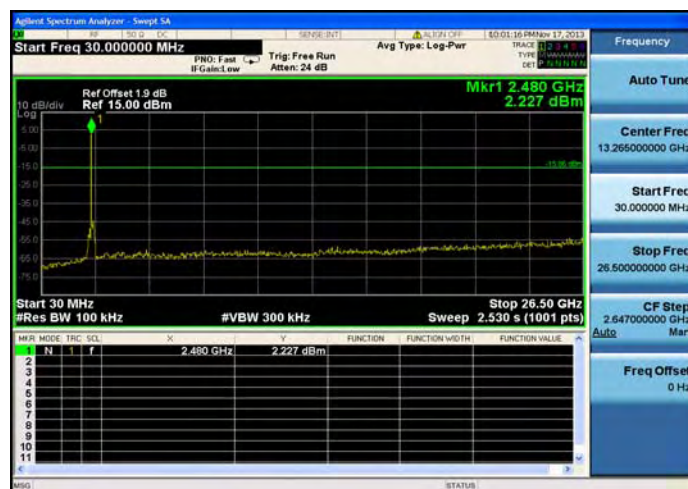


Conducted Band Edge

Mode 2: IEEE 802.11b Link Mode

2412

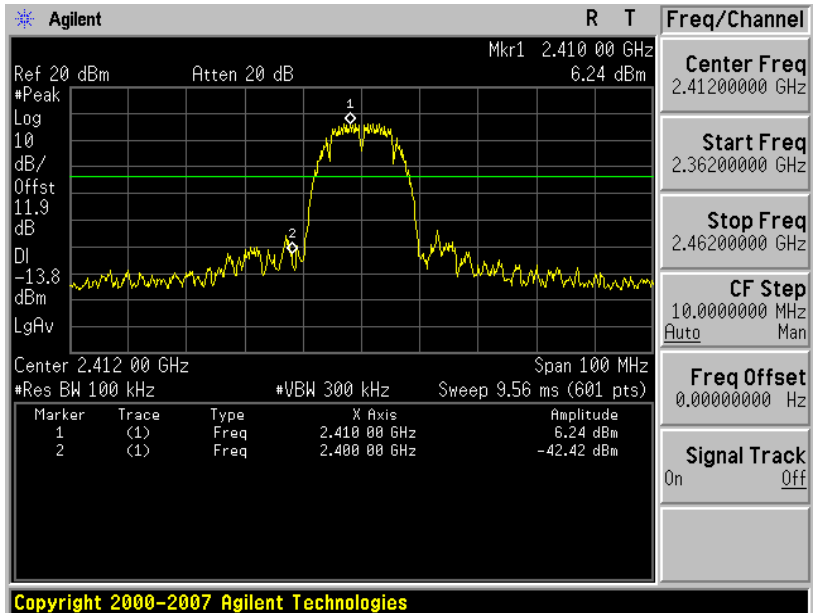


2462

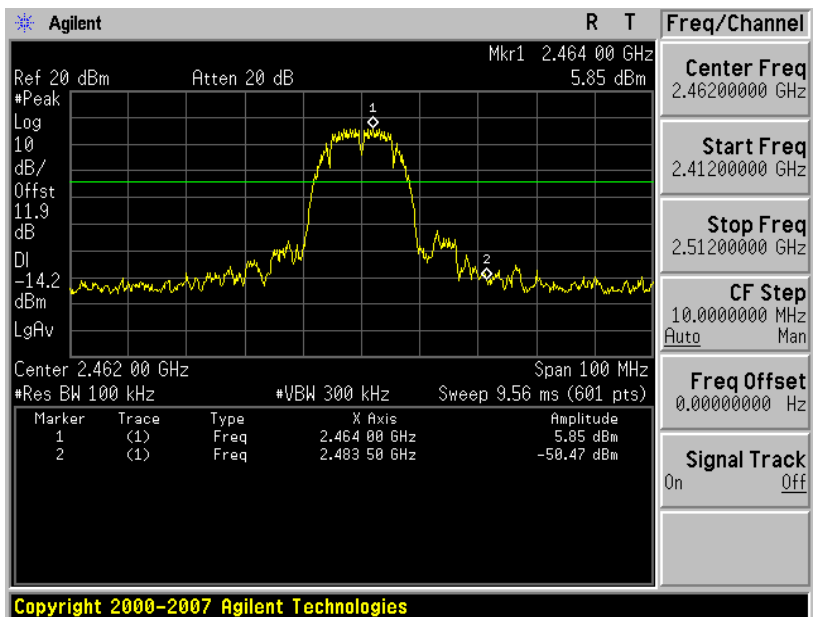


Mode 3: IEEE 802.11g Link Mode

2412

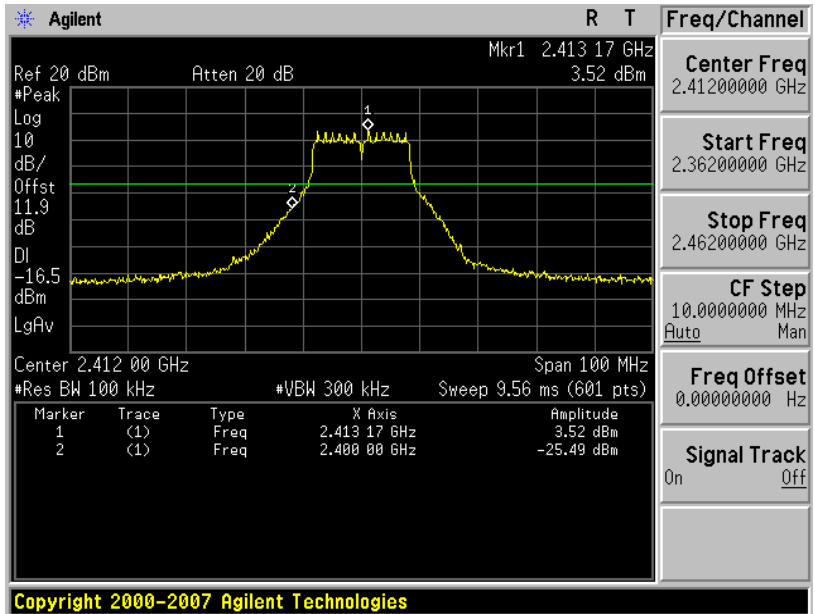


2462

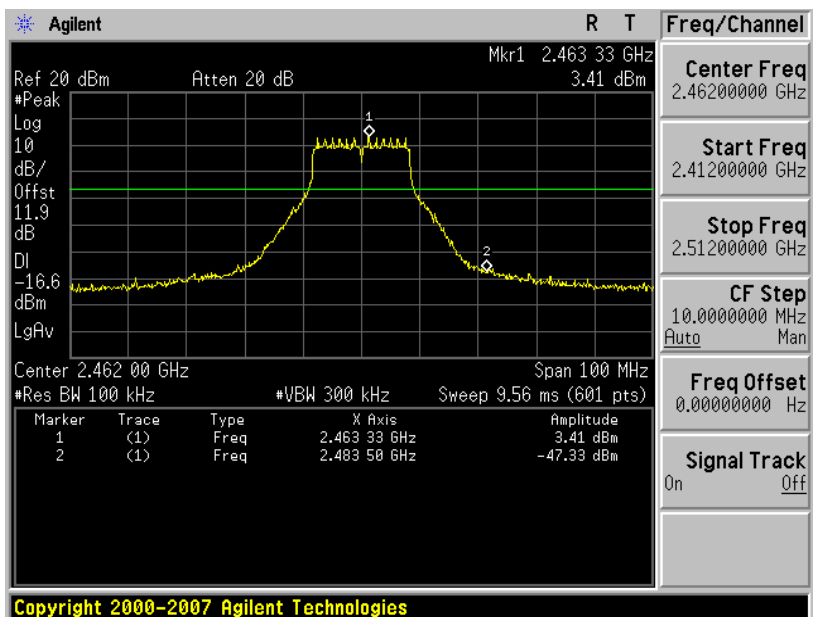


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ANT A

2412

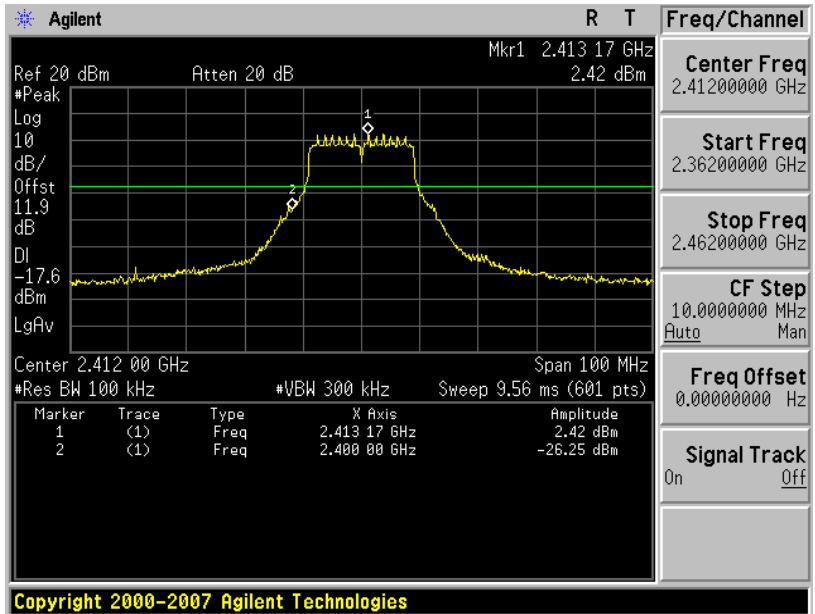


2462

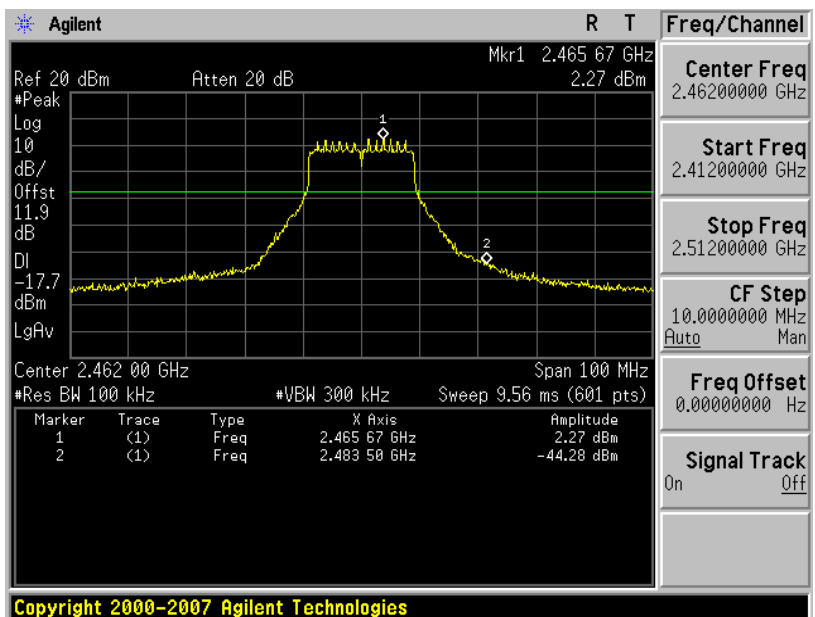


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode_ANT B

2412

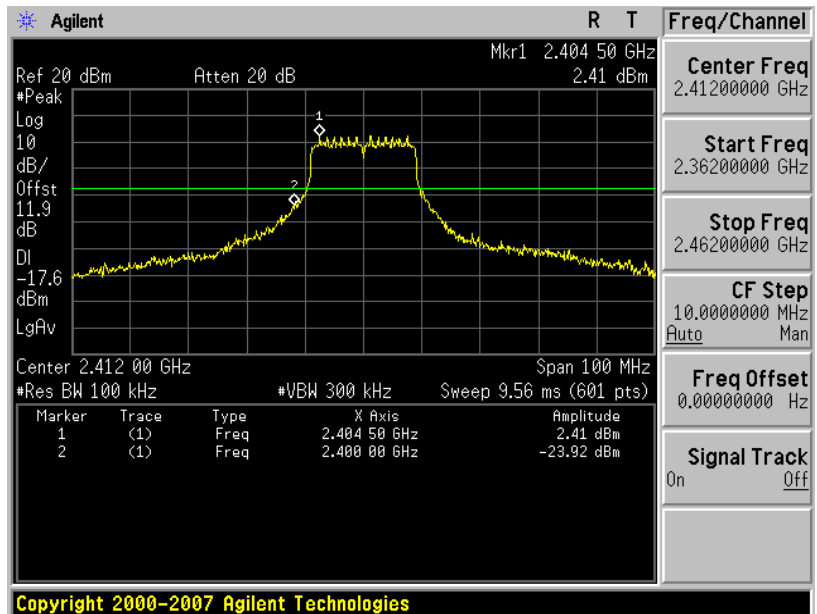


2462

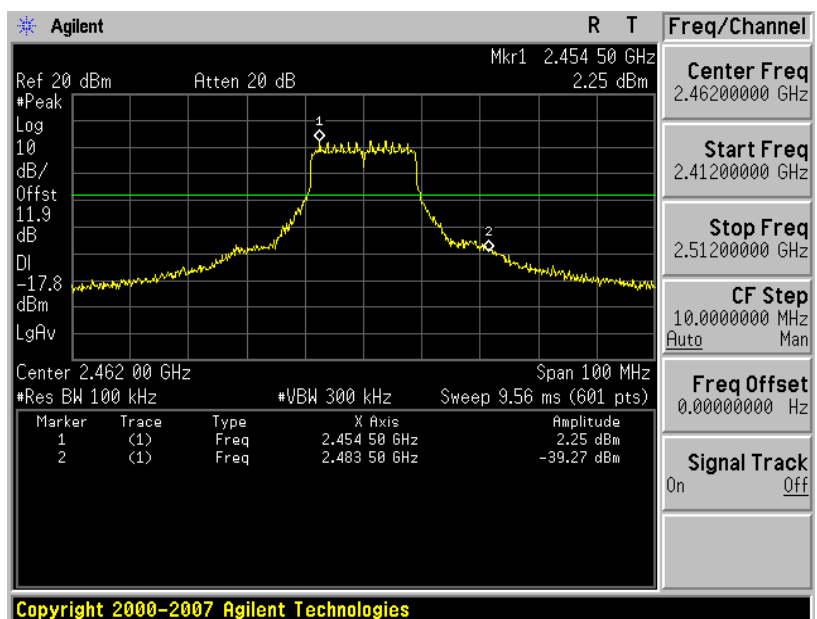


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ANT A

2422

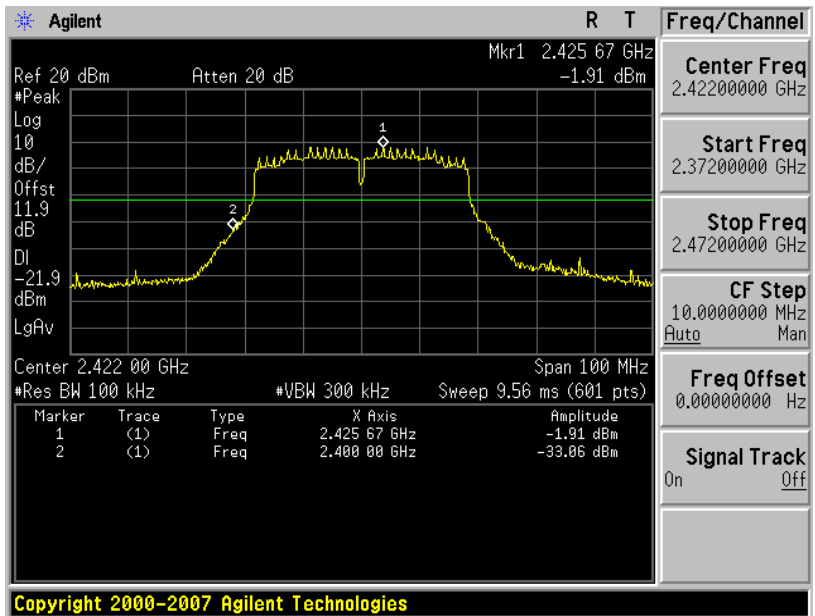


2452

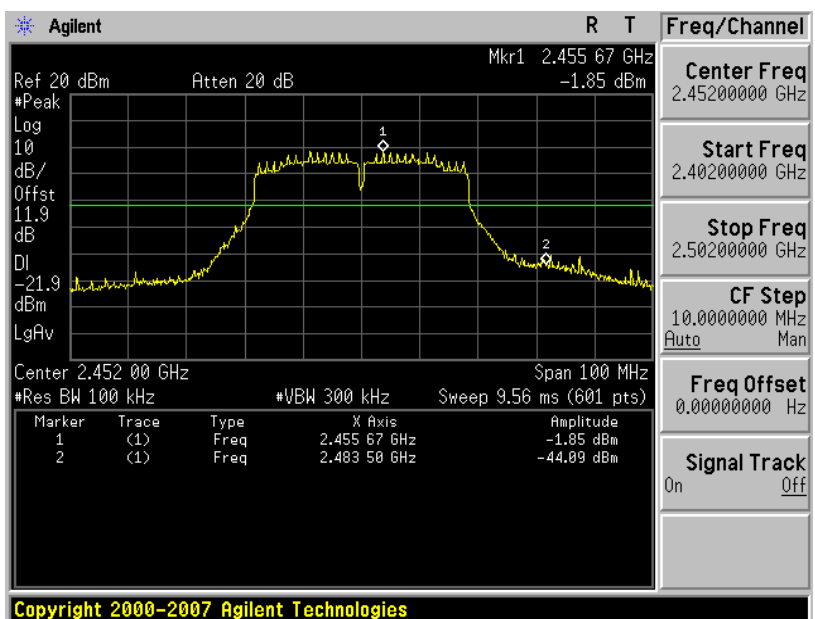


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode_ANT B

2422

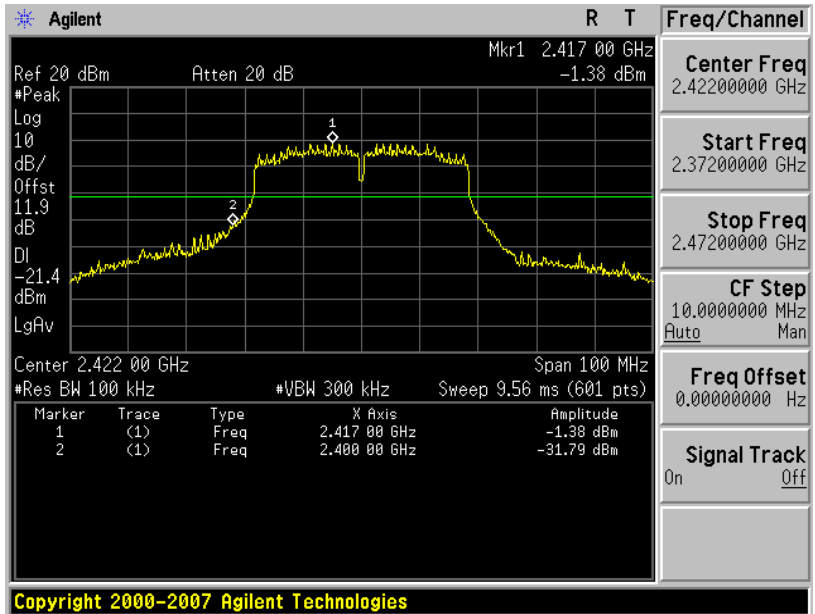


2452

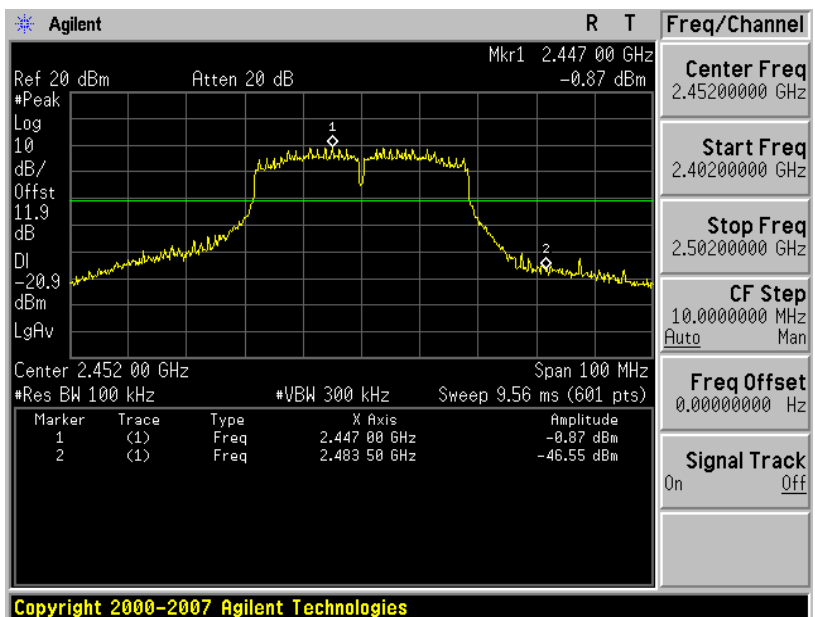


Mode 6: Bluetooth v4.0 LE Link Mode

2402

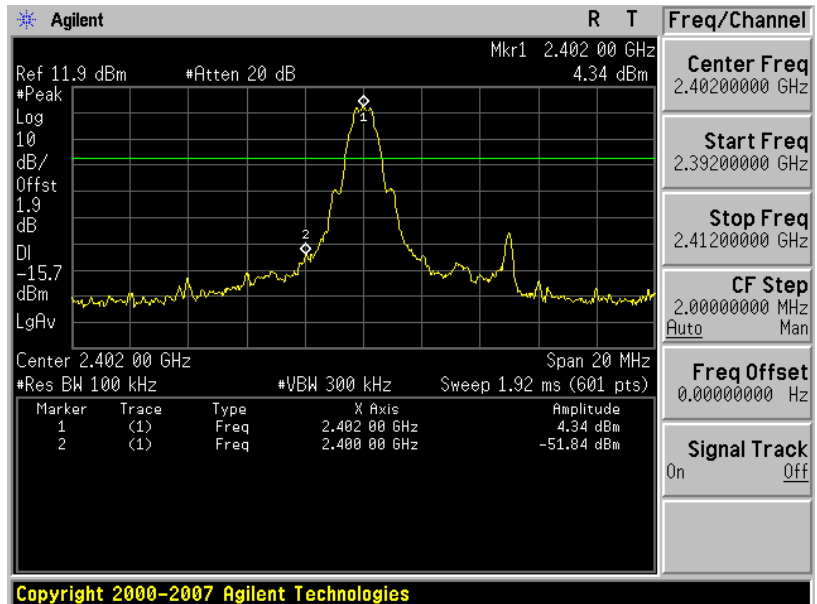

2480

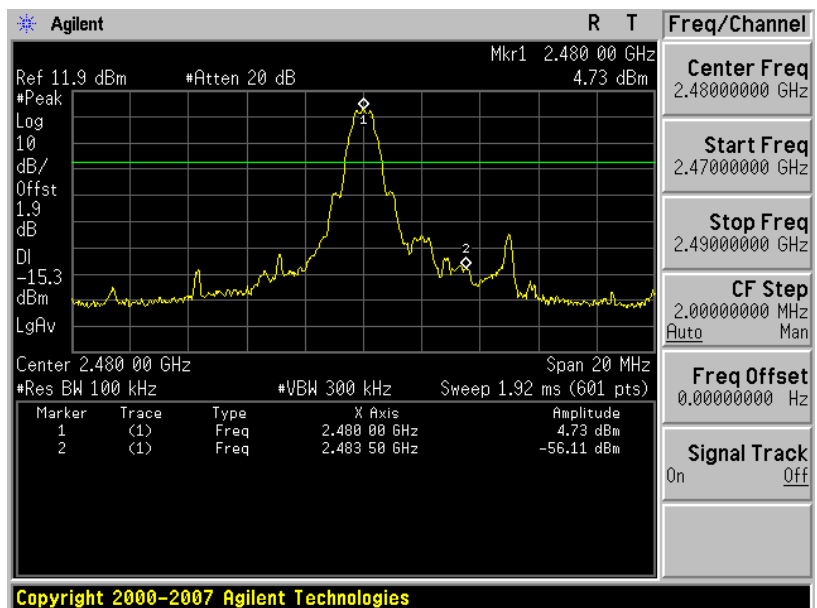


10 Band Edges Measurement

10.1.Limit

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

10.2.Test Setup

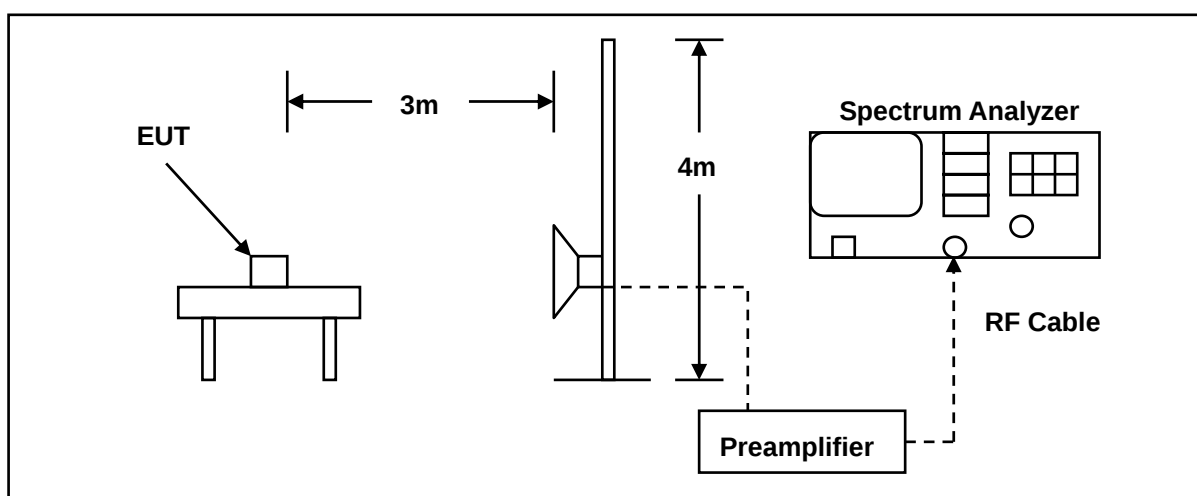

10.3.Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/16/2012	(2)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/21/2013	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2013	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/21/2013	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/10/2013	(1)
Test Site	ATL	TE01	888001	08/28/2013	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

10.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2012 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.


The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


10.5. Test Result

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	2	Date:	11/15/2013
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

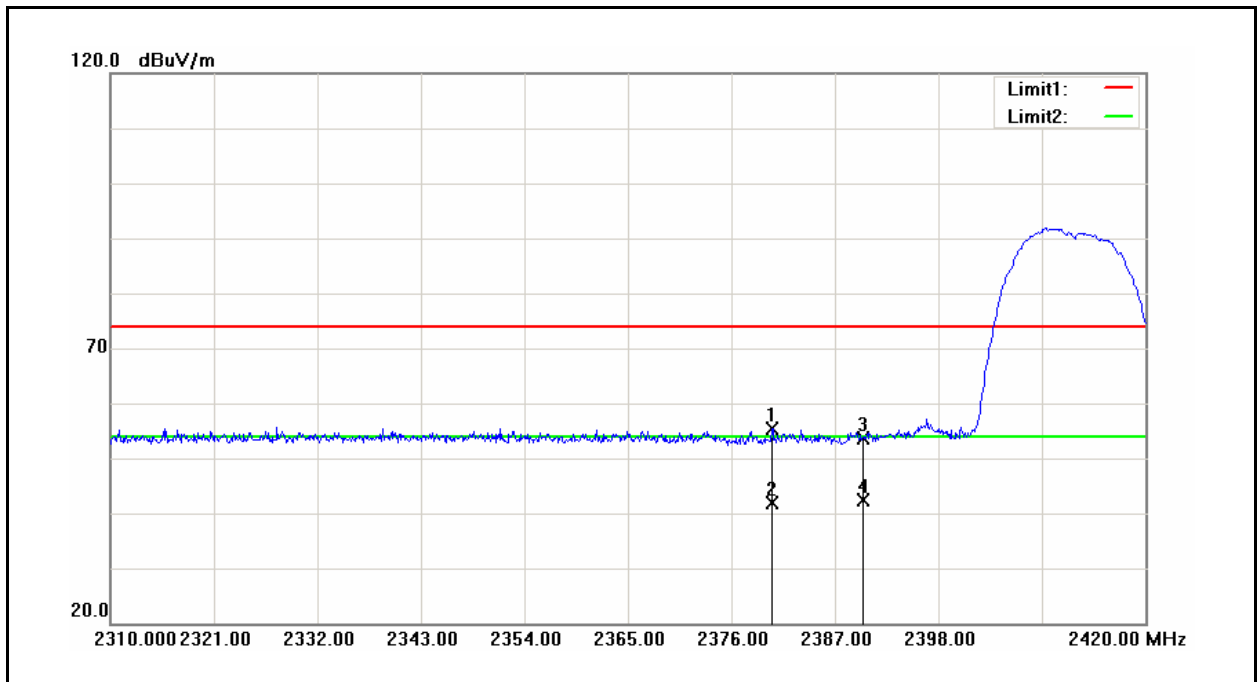


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2380.290	51.56	3.81	55.37	74.00	-18.63	peak
2	2380.290	38.12	3.81	41.93	54.00	-12.07	AVG
3	2390.000	49.85	3.88	53.73	74.00	-20.27	peak
4	2390.000	38.45	3.88	42.33	54.00	-11.67	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	2	Date:	11/15/2013
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

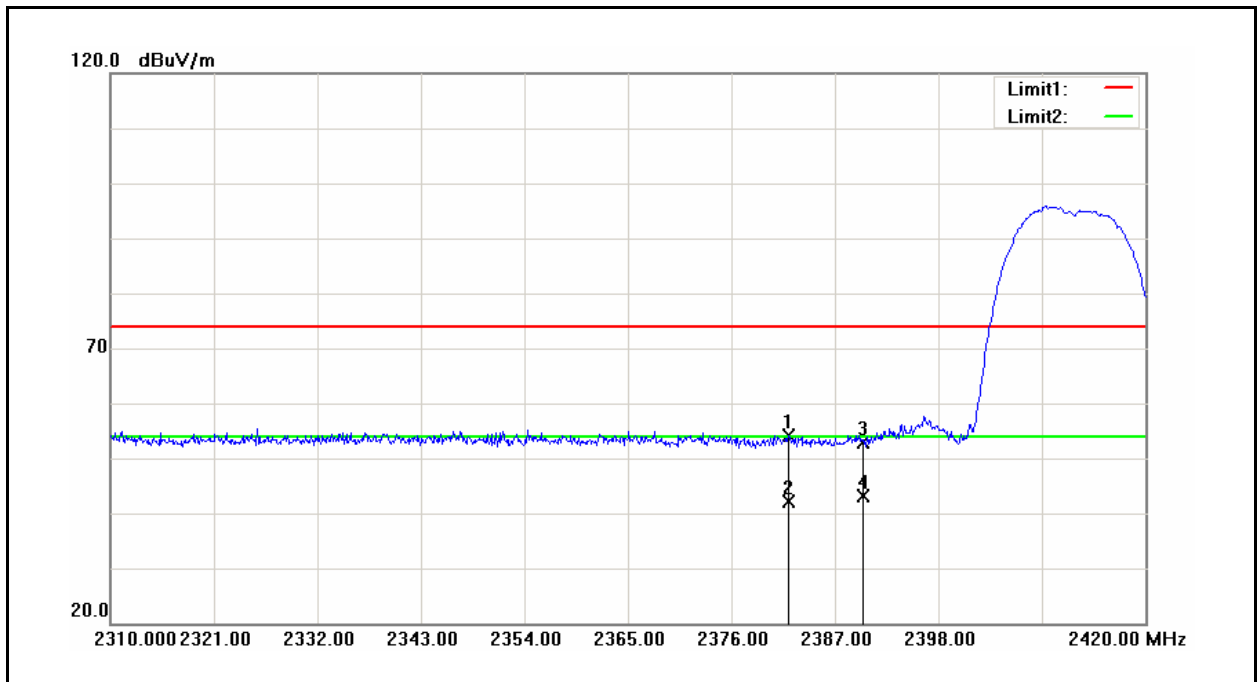


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2382.050	50.34	3.83	54.17	74.00	-19.83	peak
2	2382.050	38.29	3.83	42.12	54.00	-11.88	AVG
3	2390.000	49.04	3.88	52.92	74.00	-21.08	peak
4	2390.000	39.18	3.88	43.06	54.00	-10.94	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	2	Date:	11/15/2013
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

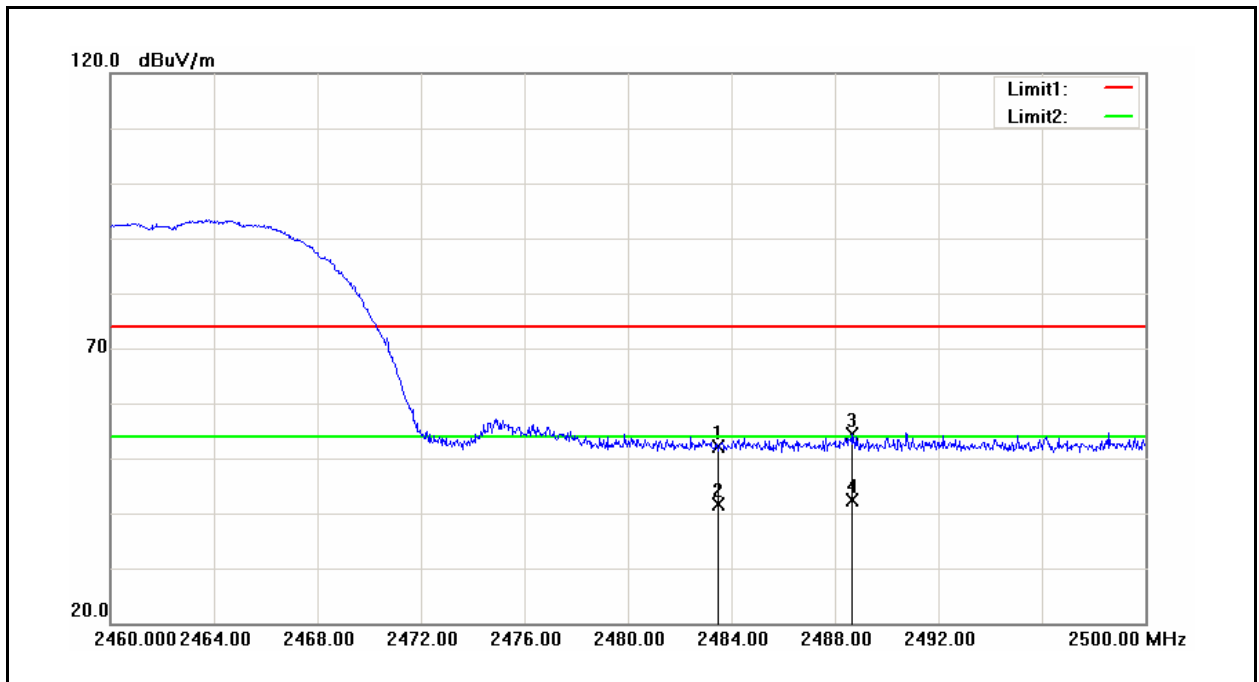


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	47.53	4.50	52.03	74.00	-21.97	peak
2	2483.500	37.11	4.50	41.61	54.00	-12.39	AVG
3	2488.680	49.85	4.54	54.39	74.00	-19.61	peak
4	2488.680	37.94	4.54	42.48	54.00	-11.52	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	2	Date:	11/15/2013
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

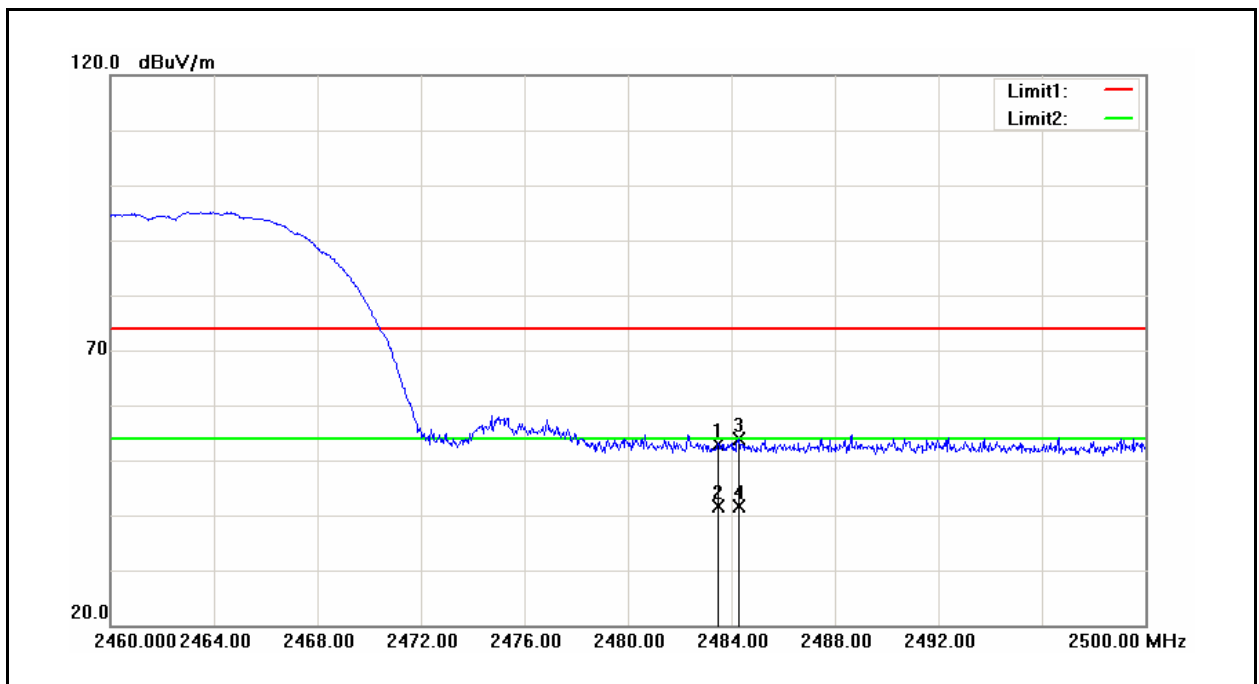


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	48.39	4.50	52.89	74.00	-21.11	peak
2	2483.500	37.20	4.50	41.70	54.00	-12.30	AVG
3	2484.280	49.31	4.51	53.82	74.00	-20.18	peak
4	2484.280	37.06	4.51	41.57	54.00	-12.43	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	3	Date:	11/15/2013
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

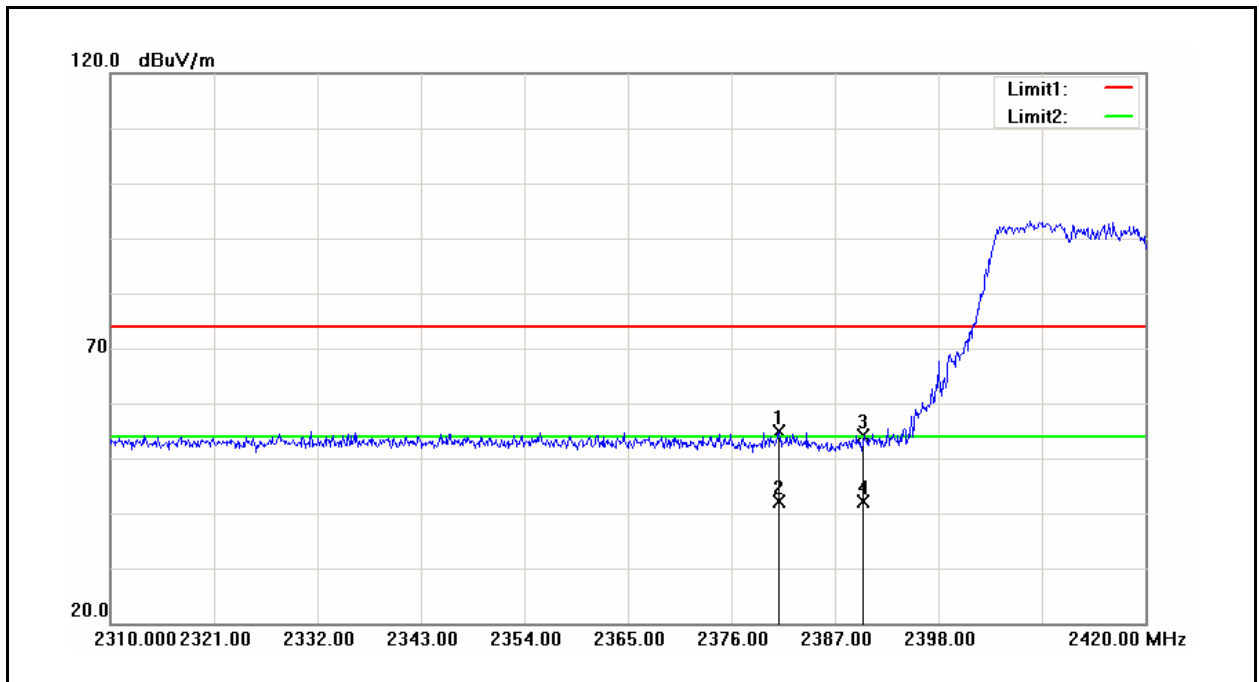


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2381.060	51.18	3.81	54.99	74.00	-19.01	peak
2	2381.060	38.21	3.81	42.02	54.00	-11.98	AVG
3	2390.000	50.37	3.88	54.25	74.00	-19.75	peak
4	2390.000	38.33	3.88	42.21	54.00	-11.79	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	3	Date:	11/15/2013
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

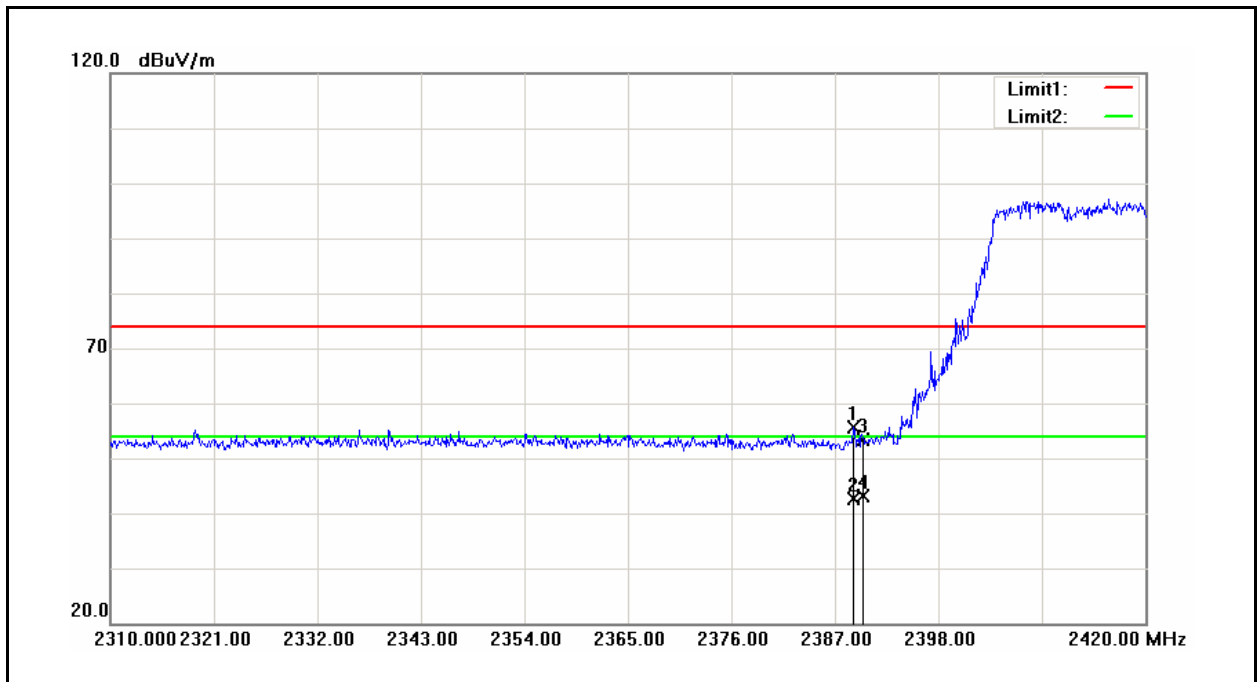


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.980	51.75	3.88	55.63	74.00	-18.37	peak
2	2388.980	38.73	3.88	42.61	54.00	-11.39	AVG
3	2390.000	49.51	3.88	53.39	74.00	-20.61	peak
4	2390.000	39.16	3.88	43.04	54.00	-10.96	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	3	Date:	11/15/2013
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

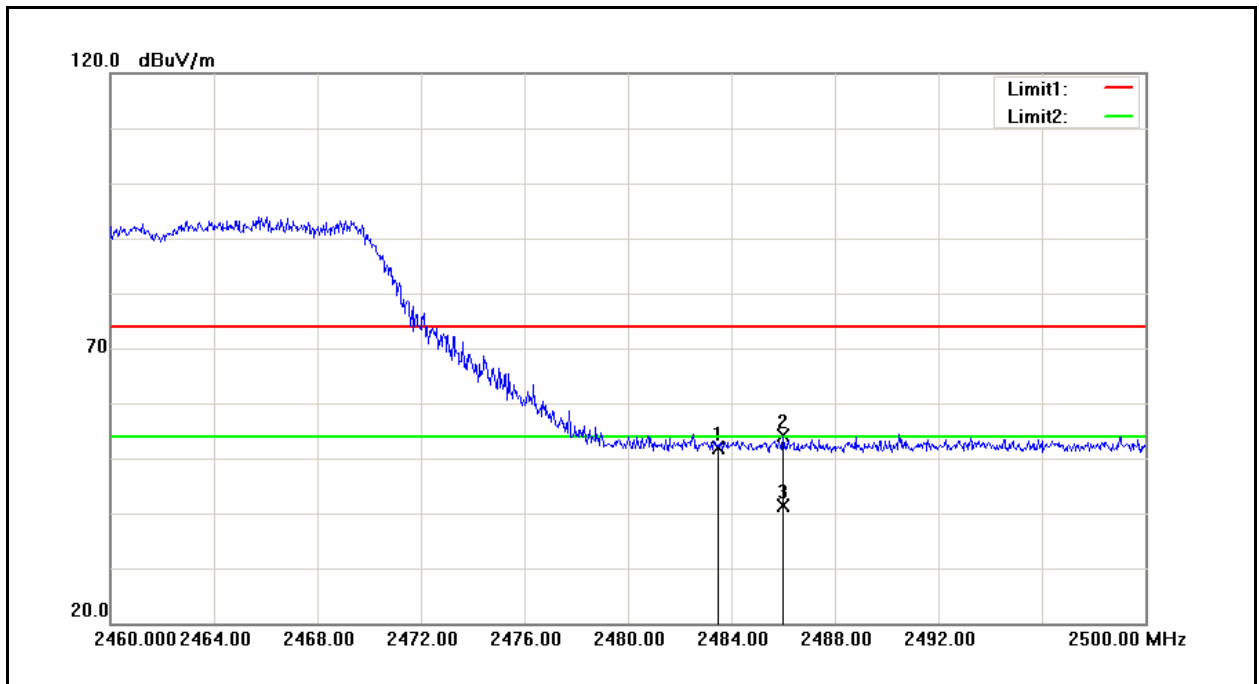


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	47.45	4.50	51.95	74.00	-22.05	peak
2	2486.000	49.53	4.52	54.05	74.00	-19.95	peak
3	2486.000	36.84	4.52	41.36	54.00	-12.64	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	3	Date:	11/15/2013
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

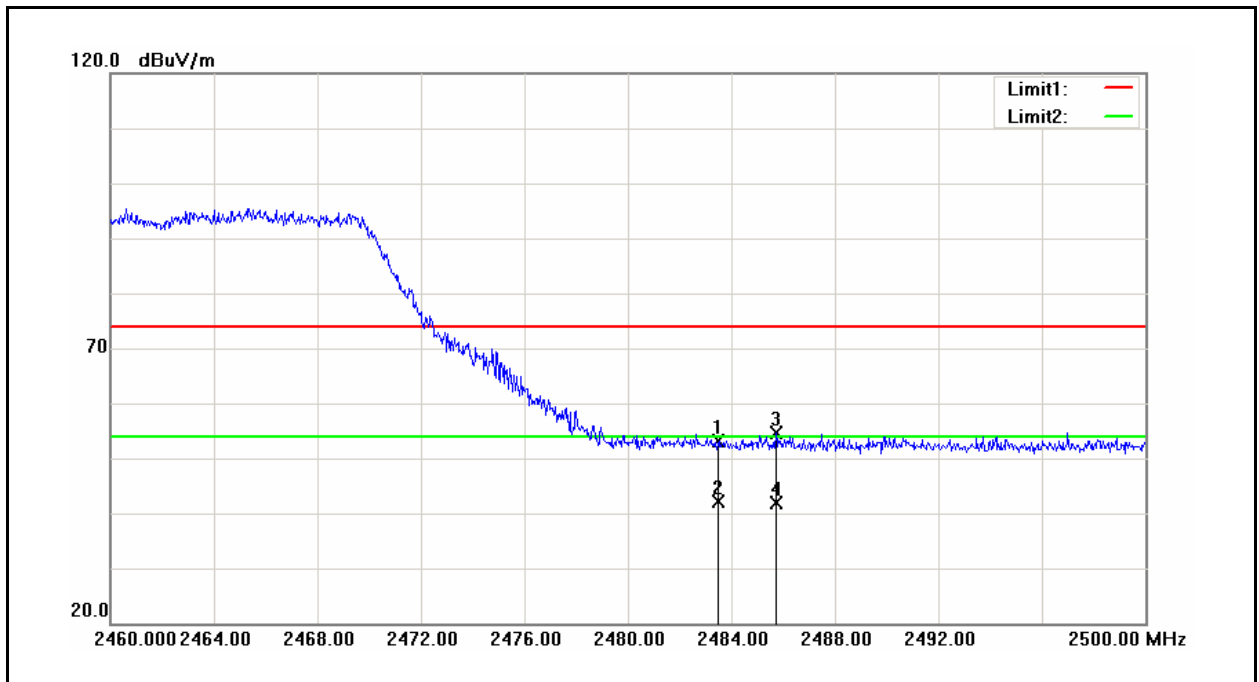


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	48.60	4.50	53.10	74.00	-20.90	peak
2	2483.500	37.64	4.50	42.14	54.00	-11.86	AVG
3	2485.720	50.14	4.52	54.66	74.00	-19.34	peak
4	2485.720	37.38	4.52	41.90	54.00	-12.10	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	4	Date:	11/15/2013
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

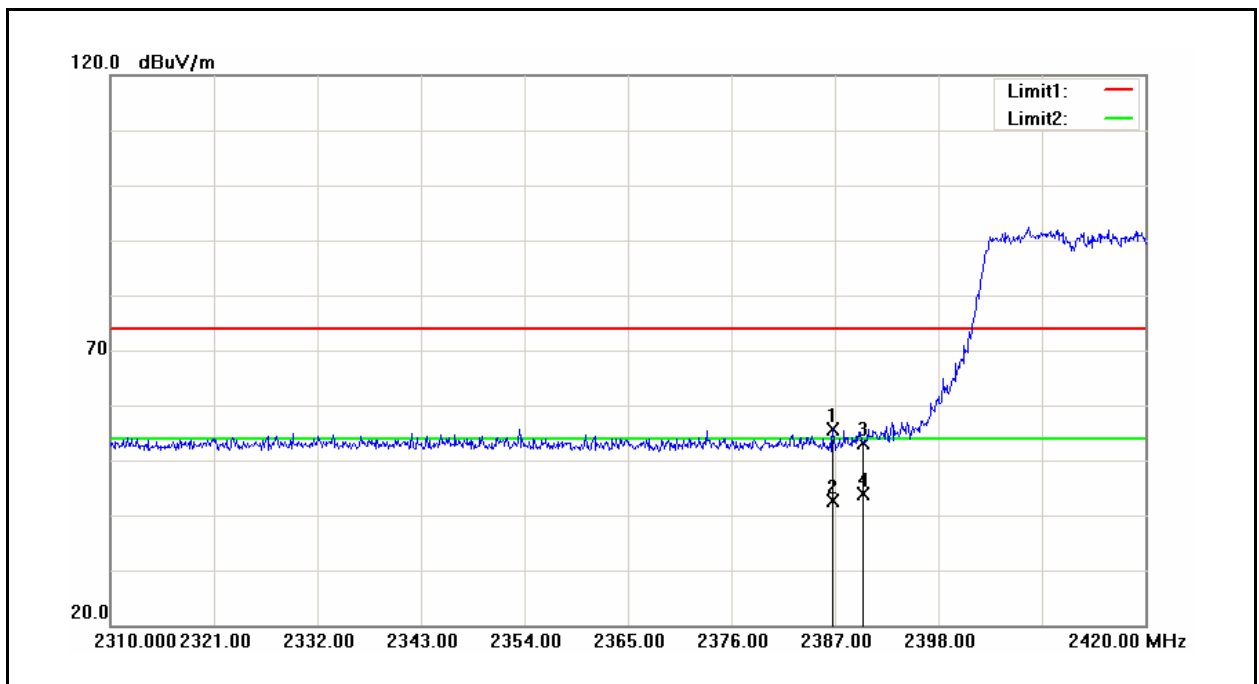


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.780	51.68	3.86	55.54	74.00	-18.46	peak
2	2386.780	38.78	3.86	42.64	54.00	-11.36	AVG
3	2390.000	49.17	3.88	53.05	74.00	-20.95	peak
4	2390.000	39.89	3.88	43.77	54.00	-10.23	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	4	Date:	11/15/2013
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

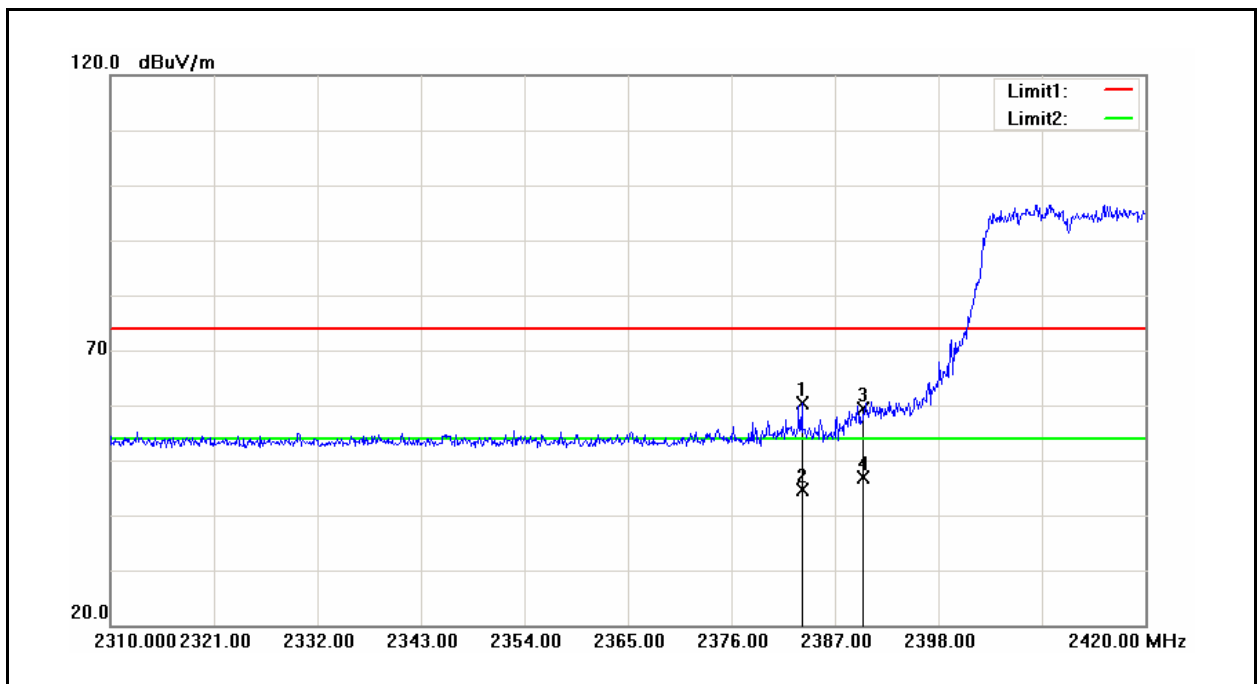


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.480	56.52	3.83	60.35	74.00	-13.65	peak
2	2383.480	40.75	3.83	44.58	54.00	-9.42	AVG
3	2390.000	55.58	3.88	59.46	74.00	-14.54	peak
4	2390.000	43.04	3.88	46.92	54.00	-7.08	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	4	Date:	11/15/2013
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

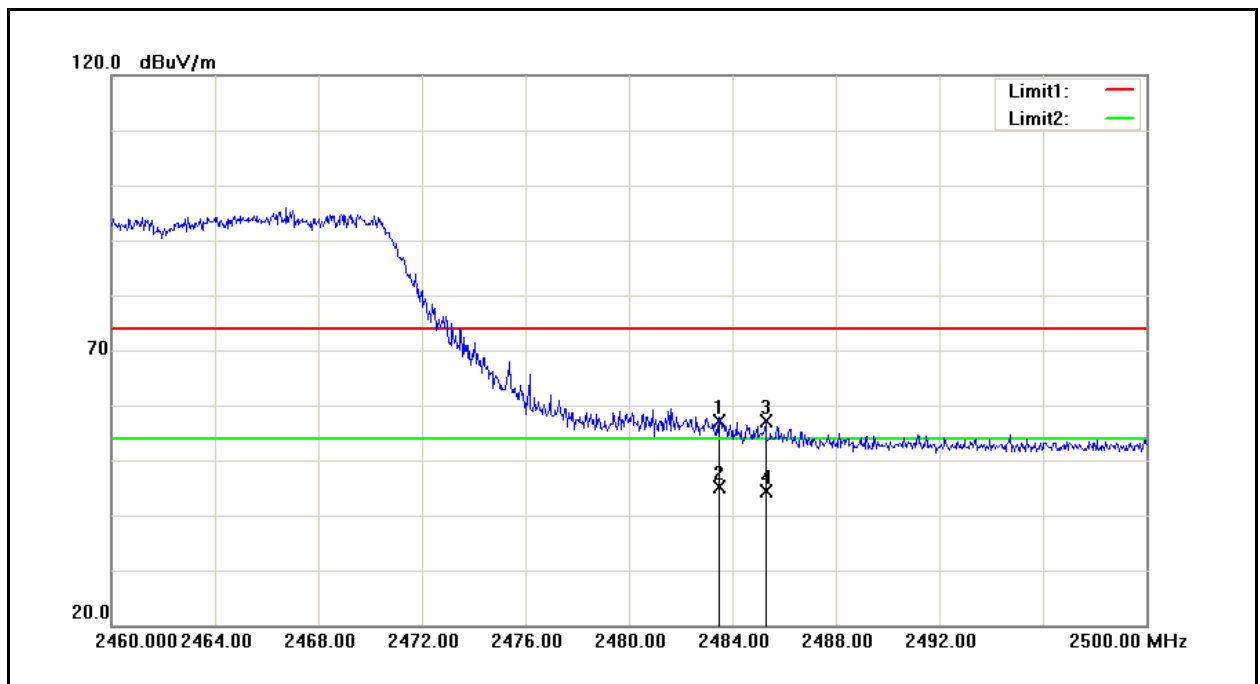


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	52.69	4.50	57.19	74.00	-16.81	peak
2	2483.500	40.52	4.50	45.02	54.00	-8.98	AVG
3	2485.280	52.56	4.52	57.08	74.00	-16.92	peak
4	2485.280	39.95	4.52	44.47	54.00	-9.53	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	4	Date:	11/15/2013
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

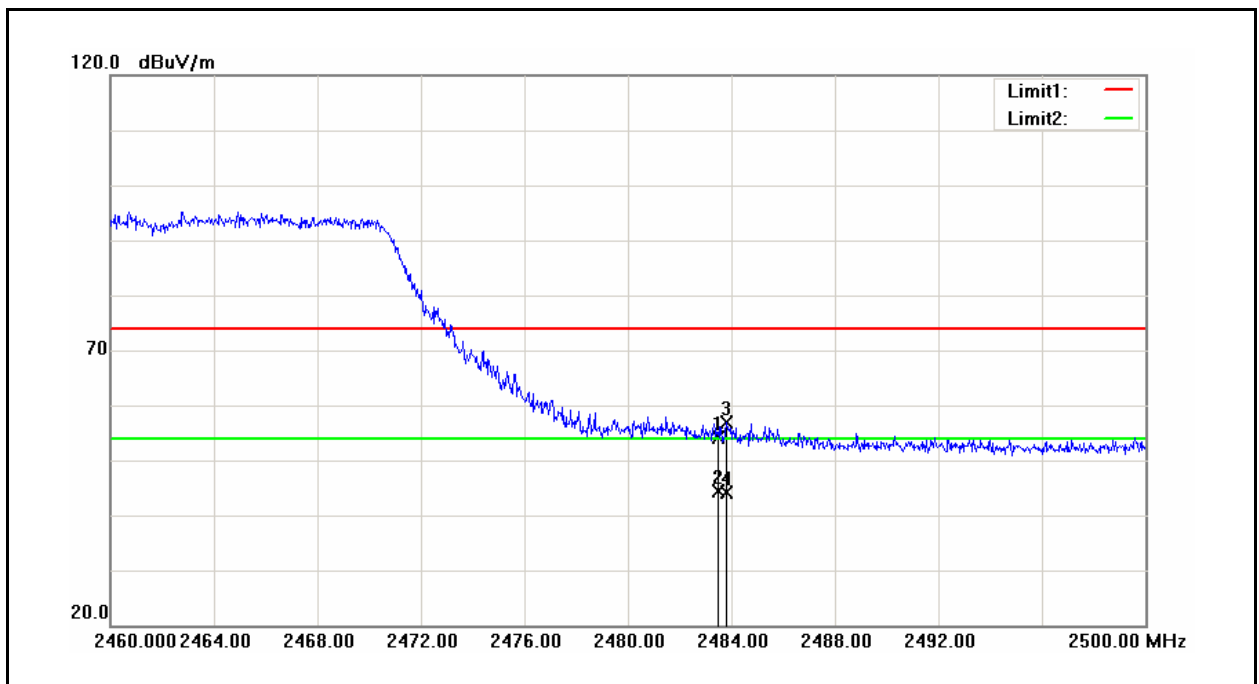


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	49.51	4.50	54.01	74.00	-19.99	peak
2	2483.500	39.88	4.50	44.38	54.00	-9.62	AVG
3	2483.800	52.44	4.51	56.95	74.00	-17.05	peak
4	2483.800	39.67	4.51	44.18	54.00	-9.82	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	5	Date:	11/15/2013
Frequency:	2422 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

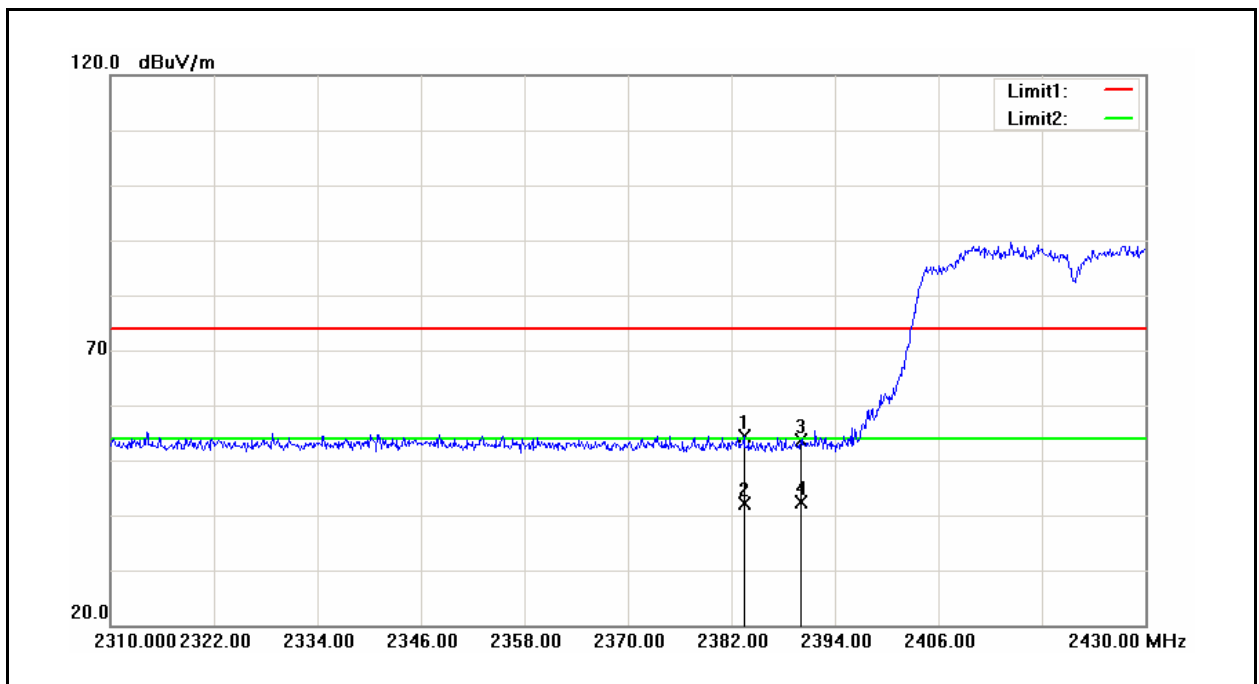


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.440	50.62	3.83	54.45	74.00	-19.55	peak
2	2383.440	38.18	3.83	42.01	54.00	-11.99	AVG
3	2390.000	49.68	3.88	53.56	74.00	-20.44	peak
4	2390.000	38.41	3.88	42.29	54.00	-11.71	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	5	Date:	11/15/2013
Frequency:	2422 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

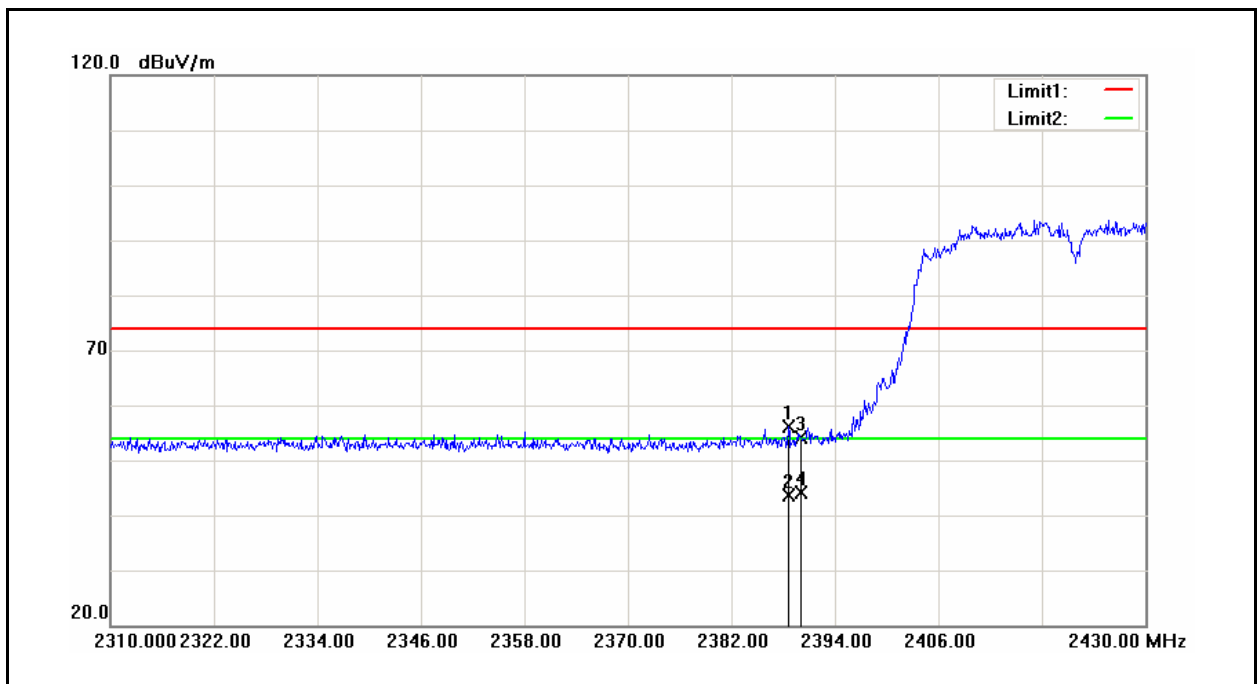


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.600	52.20	3.87	56.07	74.00	-17.93	peak
2	2388.600	39.78	3.87	43.65	54.00	-10.35	AVG
3	2390.000	50.36	3.88	54.24	74.00	-19.76	peak
4	2390.000	40.20	3.88	44.08	54.00	-9.92	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	5	Date:	11/15/2013
Frequency:	2452 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

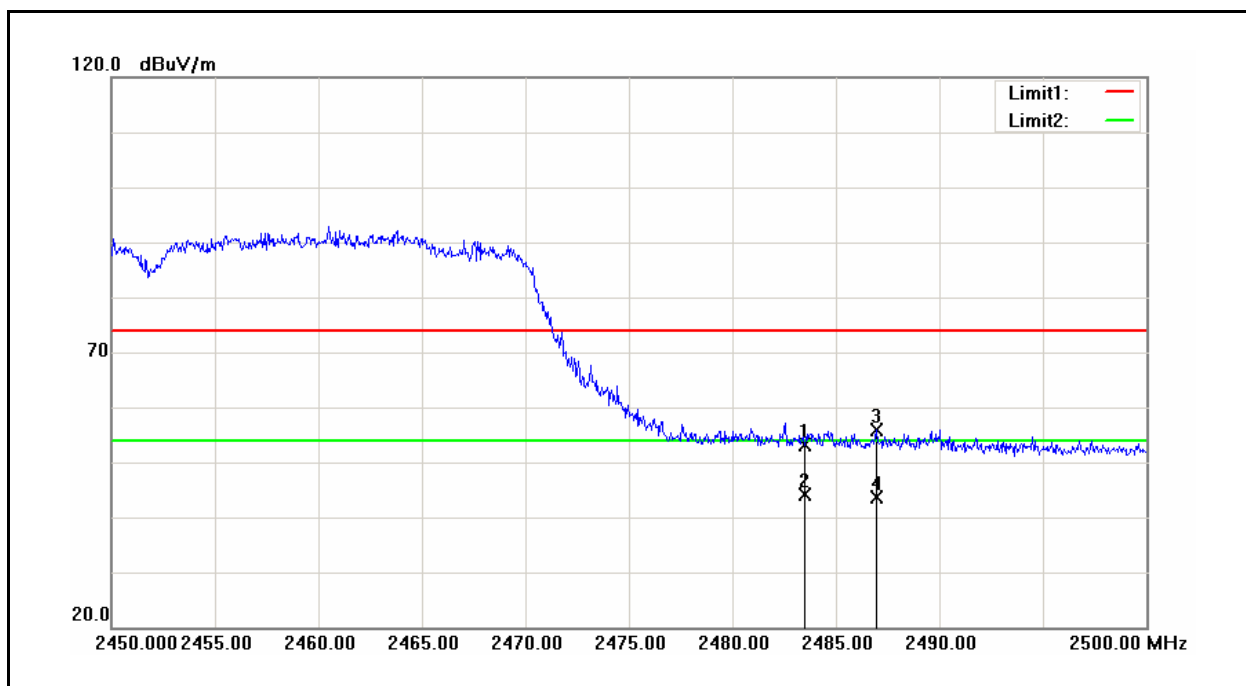


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	48.73	4.50	53.23	74.00	-20.77	peak
2	2483.500	39.63	4.50	44.13	54.00	-9.87	AVG
3	2486.950	51.27	4.53	55.80	74.00	-18.20	peak
4	2486.950	39.09	4.53	43.62	54.00	-10.38	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	5	Date:	11/15/2013
Frequency:	2452 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

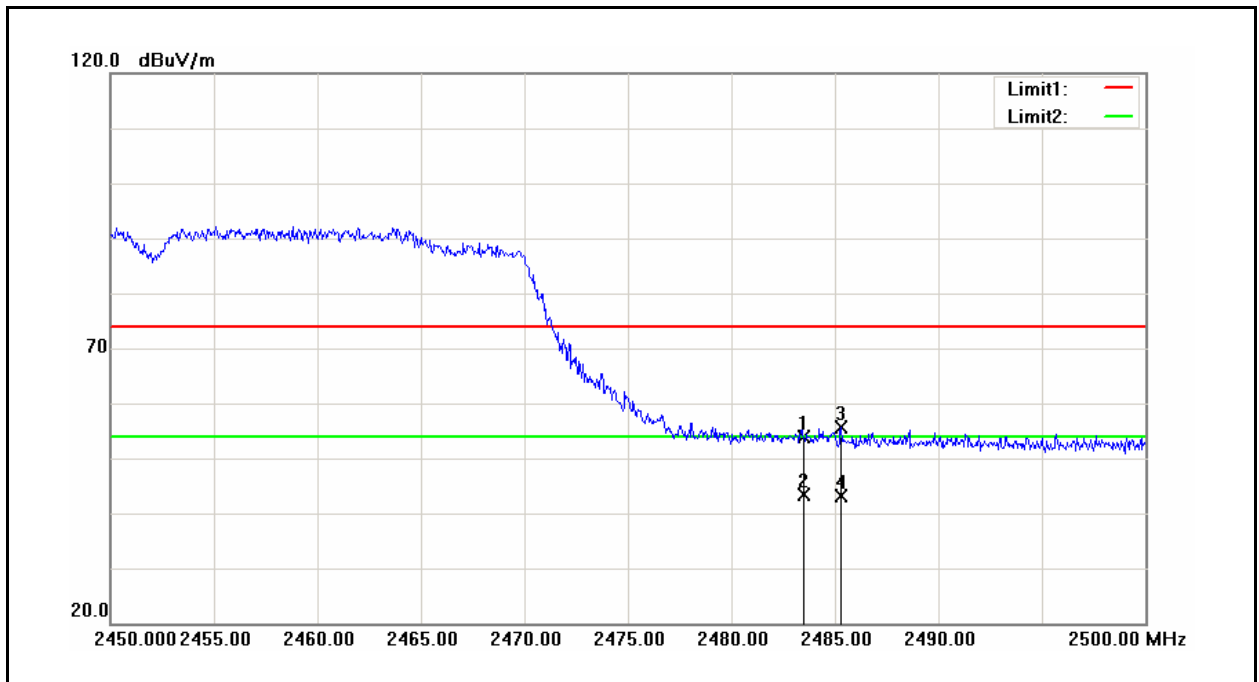


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	49.30	4.50	53.80	74.00	-20.20	peak
2	2483.500	38.99	4.50	43.49	54.00	-10.51	AVG
3	2485.300	51.04	4.52	55.56	74.00	-18.44	peak
4	2485.300	38.64	4.52	43.16	54.00	-10.84	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	6	Date:	11/21/2013
Frequency:	2402 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

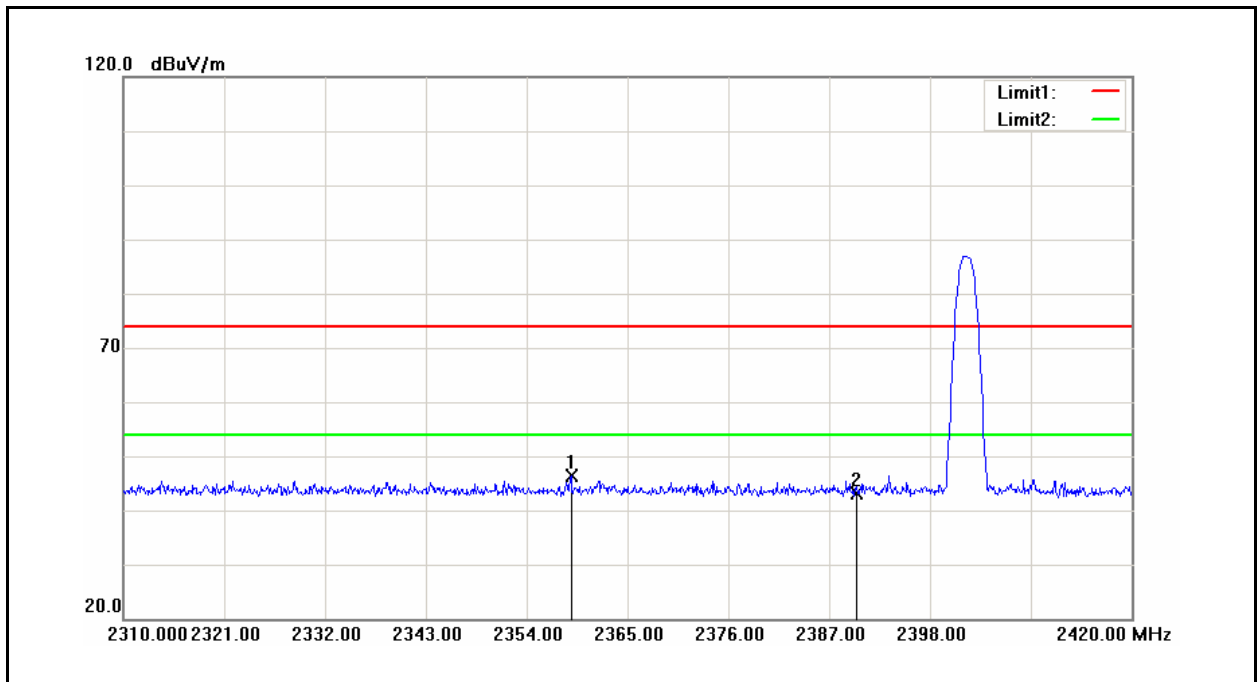


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2358.840	42.65	3.68	46.33	74.00	-27.67	peak
2	2390.000	39.20	3.88	43.08	74.00	-30.92	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	6	Date:	11/21/2013
Frequency:	2402 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

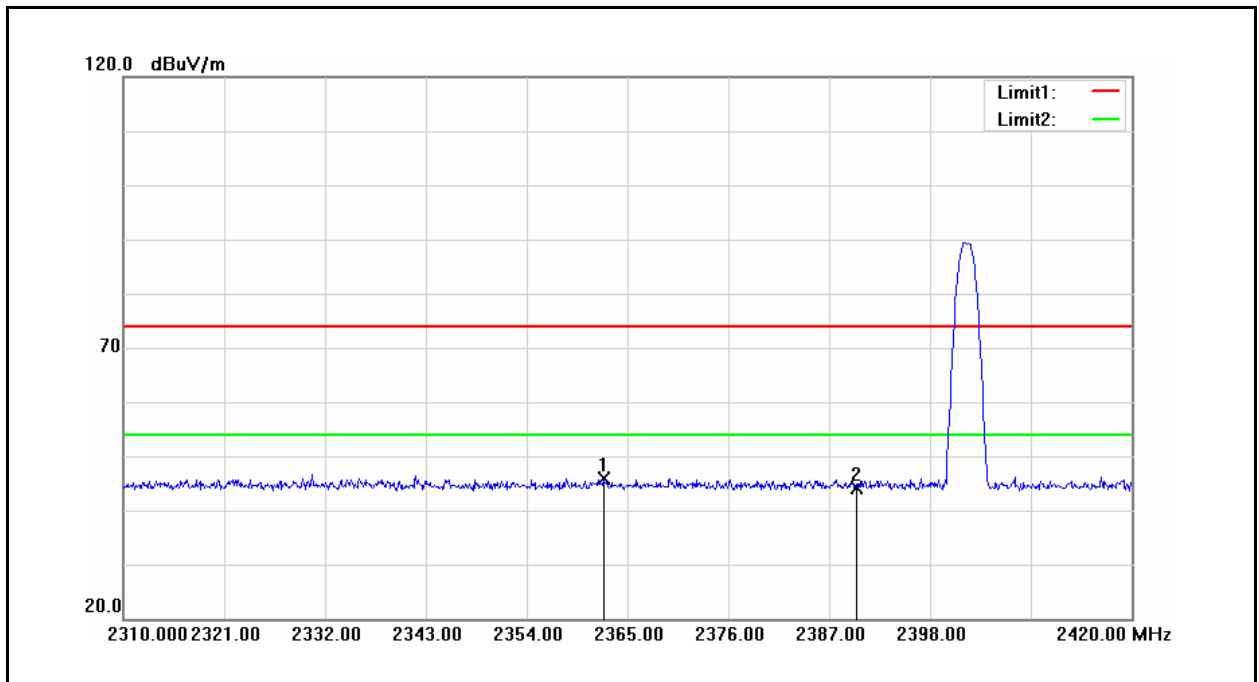


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2362.360	42.21	3.70	45.91	74.00	-28.09	peak
2	2390.000	40.36	3.88	44.24	74.00	-29.76	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	6	Date:	11/21/2013
Frequency:	2480 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

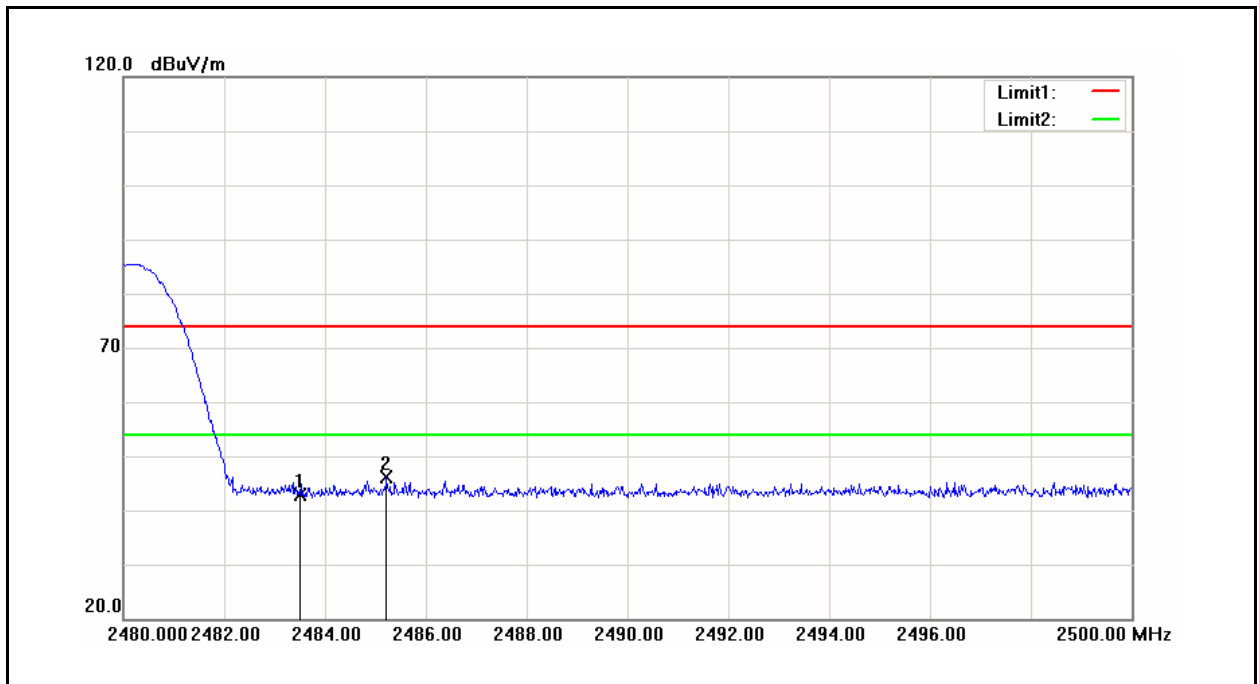

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	38.37	4.50	42.87	74.00	-31.13	peak
2	2485.220	41.70	4.52	46.22	74.00	-27.78	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	S10	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	6	Date:	11/21/2013
Frequency:	2480 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

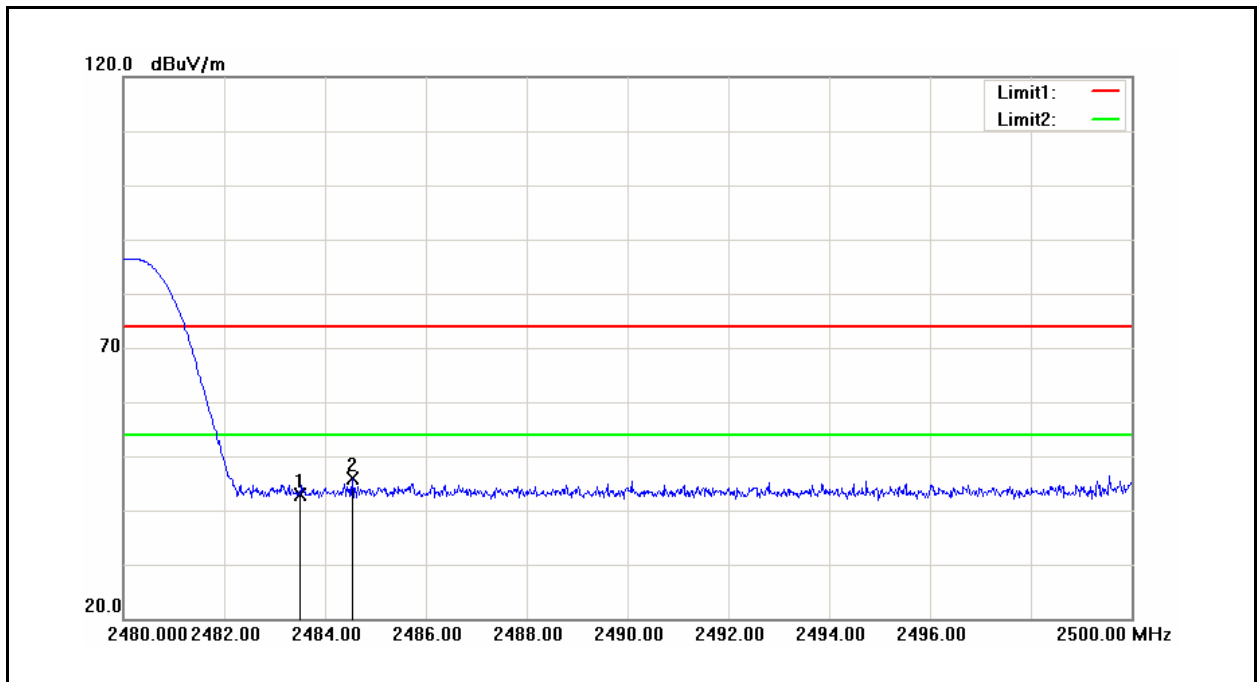

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	38.34	4.50	42.84	74.00	-31.16	peak
2	2484.540	41.45	4.51	45.96	74.00	-28.04	peak

11 Antenna Measurement

11.1.Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2.Antenna Connector Construction

The antenna used in this product is IFA antenna. And the maximum Gain of this antenna is 1.41 dBi.