



FCC TEST REPORT

According to

FCC Rules and Regulations Part 15 Subpart C

Applicant	: GIGA-BYTE TECHNOLOGY CO., LTD.
Address	: No.6, Bau Chiang Road, Hsin-Tien, Taipei 231, Taiwan
Equipment	: Slate PC
Model No.	: S1081XX,R2005XX(X=0~9,A~Z,a~z or Blank)
FCC ID.	: JCK-S2005-
Trade Name	: GIGABYTE

- The test result refers exclusively to the test presented test model / sample.,
- Without written approval of **Cerpass Technology Corp.**, the test report shall not be reproduced except in full.
- The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



Contents

1. Report of Measurements and Examinations	6
1.1 List of Measurements and Examinations	6
2. Test Configuration of Equipment under Test	7
2.1 Feature of Equipment under Test	7
2.2 RF Specifications	8
2.3 Carrier Frequency of Channels	9
2.4 Test Mode and Test Software	9
2.5 Description of Test System	9
2.6 General Information of Test	10
2.7 Measurement Uncertainty	10
3. Antenna Requirements	11
3.1 Standard Applicable	11
3.2 Antenna Construction and Directional Gain	11
4. Test of Conducted Emission	12
4.1 Test Limit	12
4.2 Test Procedures	12
4.3 Typical Test Setup	13
4.4 Measurement Equipment	13
4.5 Test Result and Data	14
4.6 Test Photographs	26
5. Test of Radiated Emission	27
5.1 Test Limit	27
5.2 Test Procedures	27
5.3 Typical Test Setup	28
5.4 Measurement Equipment	28
5.5 Test Result and Data	29
5.6 Test Photographs (30MHz ~ 1GHz)	101
5.7 Test Photographs (1GHz ~ 25GHz)	102
6. 6dB Bandwidth Measurement Data	103
6.1 Test Limit	103
6.2 Test Procedures	103
6.3 Test Setup Layout	103
6.4 Measurement Equipment	103
6.5 Test Result and Data	103
7. Maximum Peak and Average Output Power	110
7.1 Test Limit	110
7.2 Test Procedures	110
7.3 Test Setup Layout	110
7.4 Measurement Equipment	110
7.5 Test Result and Data	111
8. Power Spectral Density	124
8.1 Test Limit	124
8.2 Test Procedures	124
8.3 Test Setup Layout	124



8.4	Measurement Equipment.....	124
8.5	Test Result and Data.....	124
9.	Band Edges Measurement.....	131
9.1	Test Limit.....	131
9.2	Test Procedure.....	131
9.3	Test Setup Layout.....	131
9.4	Measurement Equipment.....	131
9.5	Test Result and Data.....	131
9.6	Restrict Band Emission Measurement Data.....	140
10.	Restricted Bands of Operation.....	144
10.1	Labeling Requirement.....	144
Appendix A. Photographs of EUT.....		A1 ~ A10



History of this test report

■ ORIGINAL.

☐ Additional attachment as following record:

Attachment No.	Issue Date	Description
TEF1109218	Feb. 23, 2012	Original.



CERTIFICATE OF COMPLIANCE

According to

FCC Rules and Regulations Part 15 Subpart C

Applicant	: GIGA-BYTE TECHNOLOGY CO., LTD.
Address	: No.6, Bau Chiang Road, Hsin-Tien, Taipei 231, Taiwan
Equipment	: Slate PC
Model No.	: S1081XX,R2005XX(X=0~9,A~Z,a~z or Blank)
FCC ID.	: JCK-S2005-

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4** The equipment was ***passed*** the test performed according to **FCC Rules and Regulations Part 15 Subpart C (2010)**.

The test was carried out on Feb. 16, 2012 at Cerpass Technology Corp.

Signature

Hill Chen

EMC/RF B.U. Assistant Manager



1. Report of Measurements and Examinations

1.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	Pass
15.207	Conducted Emission	Pass
15.209 15.247(d)	Radiated Emission	Pass
15.247(a)(2)	6dB Bandwidth	Pass
15.247(b)	Maximum Peak Output Power	Pass
15.247(d)	100kHz Bandwidth of Frequency Band Edges	Pass
15.247(e)	Power Spectral Density	Pass
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	Pass



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

CPU	Intel® Atom™ Processor
OS	Genuine Windows® 7 Compliant
Display	10.1" 1024x600 LED backlight
System Memory	DDRIII SO-DIMM*1 (Max 4GB)
Chipset	Mobile Intel® NM10 Express Chipsets
Storage Device	• 2.5" 7mm SATA HDD 5400rpm • Solid State Drive(SSD)
Audio	1.5 Watt Speakers*2, Internal Mic-in
I/O Port	USB 3.0*1, USB 2.0*1, D-Sub, HDMI, RJ45, Mic-in, Earphone-out, SD card reader, DC-in Jack, Docking Station / Extended Battery Port and SIM card slot *
Communications	10/100/1000 Mbps Ethernet Base-T
	802.11b/g/n Wireless
	Bluetooth V4.0
Webcam	1.3 Mega Pixel
Battery	Li-polymer, 4000mAh, 29.6Wh(Main)
	Li-ion, 2700mAh, 20.25Wh (Extended Optional)



2.2 RF Specifications

Product Description	IEEE 802.11 b/g/n Wi-Fi with Bluetooth V4.0/3.0HS Combo half size mini card
Bluetooth Standard	IEEE 802.11b/g/n, Wi-Fi compliant / Bluetooth v4.0/3.0+HS Standard
Host Interface	WiFi: PCIE Bluetooth: USB
Major Chipset	Realtek 8188CE-VL + CSR BC8510-A06
Dimension	26.65x29.85x3.95 mm
Weight	TBC
Antenna	Hirose* U.FL-R-SMT 1 (Main) : WiFi TX/RX , BT TX/RX 2 (Aux) : WiFi TX/RX , BT TX/RX
Operating Conditions	
Voltage	3.0V~3.6V
Temperature	0-70 oC
Electrical Specifications	
Frequency Range	Wi-Fi: 2.4 GHz ISM Bands 2412MHz-2462MHz BT: 2402MHz-2480MHz
Modulation	Wi-Fi: 802.11 g/n: OFDM 802.11b: CCK(11, 5.5Mbps), QPSK(2Mbps), BPSK(1Mbps) BT: Header GFSK Payload 2M: 4-DQPSK Payload 3M: 8DPSK
Output Power	Wi-Fi: 802.11b: 16 dBm +/-2dBm 802.11g: 14 dBm +/-2dBm 802.11n(HT20): 13 dBm +/-2dBm 802.11n(HT40): 13 dBm +/-2dBm BT: -6 ≤ Output Power ≤ +4 dBm (Conductive)
Receive Sensitivity	Wi-Fi: 802.11b: less than -80 dBm (11Mbps) 802.11g: less than -70 dBm (54Mbps) 802.11n: less than -61 dBm at HT40 MCS7 less than -64 dBm at HT20 MCS7 BT: BER < 0.1% (Anritsu 8852B Tx -70Bm)
Operating Range	Wi-Fi: Open Space: TBD Indoor: TBD (The transmission speed may vary according to the environment) BT: TBD (depending on environment and NB model)
Regulatory	TBC



2.3 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT 20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437	---	---

802.11n HT40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
03	2422	09	2452
04	2427	---	---
05	2432	---	---
06	2437	---	---

2.4 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- The complete test system included Mouse and EUT for EMC test. The remote workstation included Notebook.
- An executive program, "MPTOOL. BTTEST" under WIN 7 was executed to transmit and receive data to the remote workstation through WLAN.
- The following test modes were performed for test:
 - Test Mode 1: Adapter, Delta / ADP-40PH BB
 - 802.11b/g/n HT20: CH01: 2412MHz, CH06: 2437MHz, CH11: 2462MHz
 - 802.11n HT40: CH03: 2422MHz, CH06: 2437MHz, CH09: 2452MHz
 - Test Mode 2: Adapter, ADP-18TB A
 - 802.11b/g/n HT20: CH01: 2412MHz, CH06: 2437MHz, CH11: 2462MHz
 - 802.11n HT40: CH03: 2422MHz, CH06: 2437MHz, CH09: 2452MHz

2.5 Description of Test System

Device	Manufacturer	Model No.	Description
Mouse	Logitech	OF-2854	Data Cable, USB Shielding 1.85 m



2.6 General Information of Test

Test Site :	CerpPASS Technology Corp. 2F-11, No. 3, Yuan Qu St., (Nankang Software Park), Taipei, Taiwan 115, R.O.C.
Test Site Location (OATS2-SD) :	No.68-1, Shihbachongsi, Shihding Township, Taipei City 223, Taiwan, R.O.C.
FCC Registration Number :	TW1049, TW1061, 390316, 488071
IC Registration Number :	4934B-1, 4934D-1
VCCI Registration Number :	T-1173 for Telecommunication Test C-4139 for Conducted emission test R-3428 for Radiated emission test G-97 for Radiated emission test above 1GHz
Test in Compliance with:	ANSI C63.4-2009 FCC Part 15 Subpart C
Frequency Range Investigated:	Conducted: from 150kHz to 30MHz Radiation: from 30MHz to 25,000MHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.

2.7 Measurement Uncertainty

Measurement Item	Uncertainty
Radiated emission	$\pm 4.11\text{dB}$
Peak Output Power(conducted)	$\pm 1.38\text{dB}$
Peak Output Power(Radiated)	$\pm 1.70\text{dB}$
Power Spectral Density	$\pm 1.39\text{dB}$
Radiated emission(3m)	$\pm 4.11\text{dB}$
Radiated emission(10m)	$\pm 3.89\text{dB}$



3. Antenna Requirements

3.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

3.2 Antenna Construction and Directional Gain

Antenna Type: PCB Antenna

Antenna Gain: 1.9 dBi



4. Test of Conducted Emission

4.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2009 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

4.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



4.3 Typical Test Setup

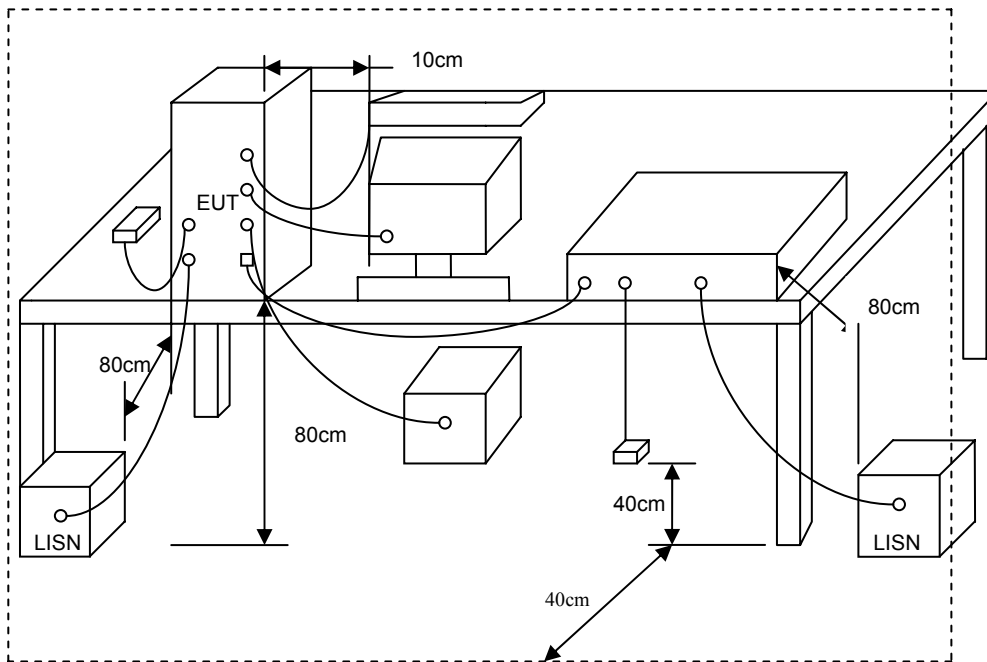


4.4 Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Receiver	R&S	ESCI	100443	2012/01/12	2013/01/11
LISN	Schwarzbeck	NSLK 8127	8127-516	2011/05/05	2012/05/04
LISN	Schwarzbeck	NSLK 8127	8127-568	2011/08/24	2012/08/23



4.5 Test Result and Data

Power	: AC 120V	Pol/Phase	: LINE
Test Mode 1	: 802.11g, CH1	Temperature	: 24 °C
Test Date	: 2012/02/13	Humidity	: 58 %

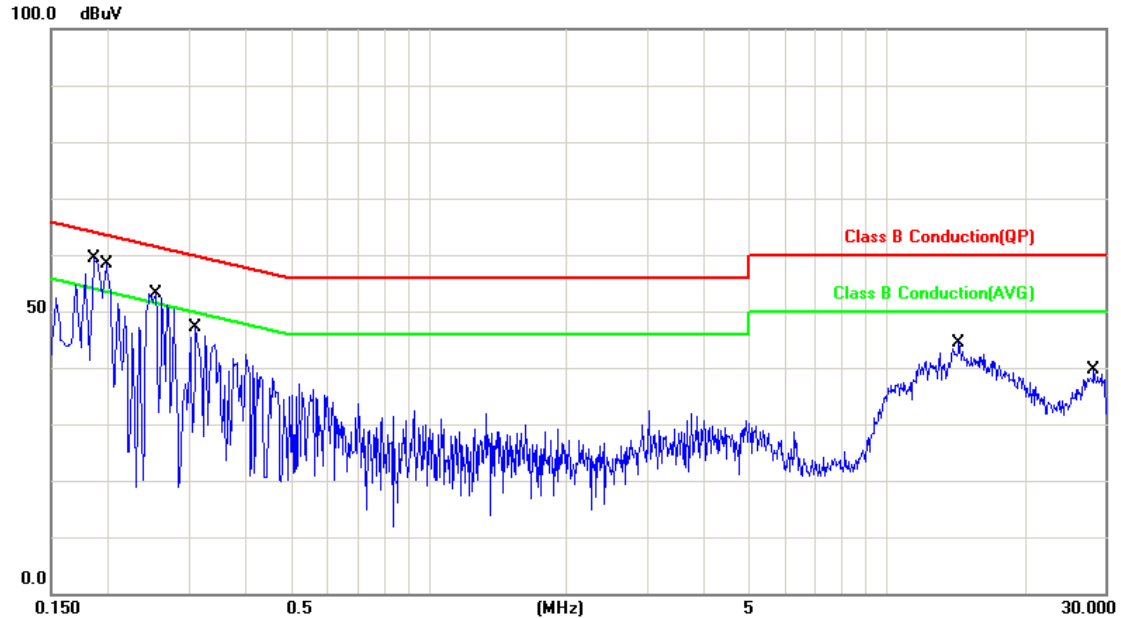


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1860	0.09	56.73	56.82	64.21	-7.39	QP	P
2	0.1860	0.09	35.57	35.66	54.21	-18.55	AVG	P
3	0.1980	0.09	56.03	56.12	63.69	-7.57	QP	P
4	0.1980	0.09	38.99	39.08	53.69	-14.61	AVG	P
5	0.2540	0.09	50.32	50.41	61.62	-11.21	QP	P
6	0.2540	0.09	30.54	30.63	51.62	-20.99	AVG	P
7	0.3100	0.09	43.27	43.36	59.97	-16.61	QP	P
8	0.3100	0.09	20.25	20.34	49.97	-29.63	AVG	P
9	14.4340	0.51	38.99	39.50	60.00	-20.50	QP	P
10	14.4340	0.51	31.16	31.67	50.00	-18.33	AVG	P
11	28.4340	0.74	32.56	33.30	60.00	-26.70	QP	P
12	28.4340	0.74	26.16	26.90	50.00	-23.10	AVG	P

Remarks: 1. Result = Read Value + Factor
 2. Factor = LISN (ISN) Factor + Cable Loss



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode 1	: 802.11g, CH1	Temperature	: 24 °C
Test Date	: 2012/02/13	Humidity	: 58 %

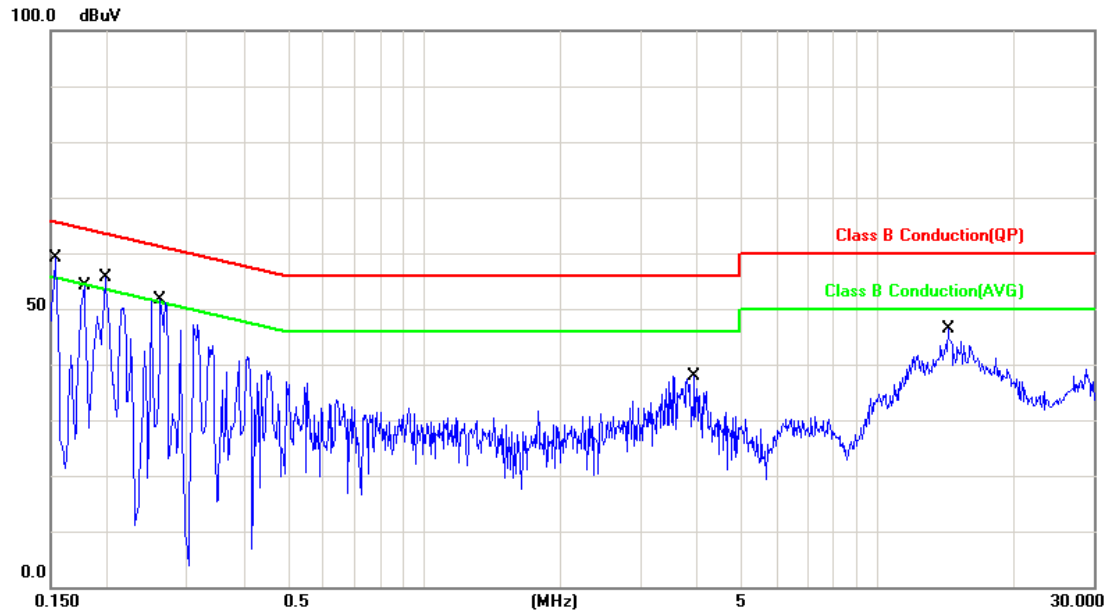


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1539	0.11	51.81	51.92	65.78	-13.86	QP	P
2	0.1539	0.11	27.20	27.31	55.78	-28.47	AVG	P
3	0.1780	0.11	47.91	48.02	64.57	-16.55	QP	P
4	0.1780	0.11	26.13	26.24	54.57	-28.33	AVG	P
5	0.1980	0.11	55.84	55.95	63.69	-7.74	QP	P
6	0.1980	0.11	39.18	39.29	53.69	-14.40	AVG	P
7	0.2620	0.11	49.27	49.38	61.36	-11.98	QP	P
8	0.2620	0.11	31.47	31.58	51.36	-19.78	AVG	P
9	3.9540	0.28	31.92	32.20	56.00	-23.80	QP	P
10	3.9540	0.28	17.45	17.73	46.00	-28.27	AVG	P
11	14.3180	0.52	40.11	40.63	60.00	-19.37	QP	P
12	14.3180	0.52	31.35	31.87	50.00	-18.13	AVG	P

Remarks: 1. Result = Read Value + Factor
2. Factor = LISN (ISN) Factor + Cable Loss



Power	: AC 120V	Pol/Phase	: LINE
Test Mode 1	: 802.11n HT20, CH1	Temperature	: 24 °C
Test Date	: 2012/02/13	Humidity	: 58 %

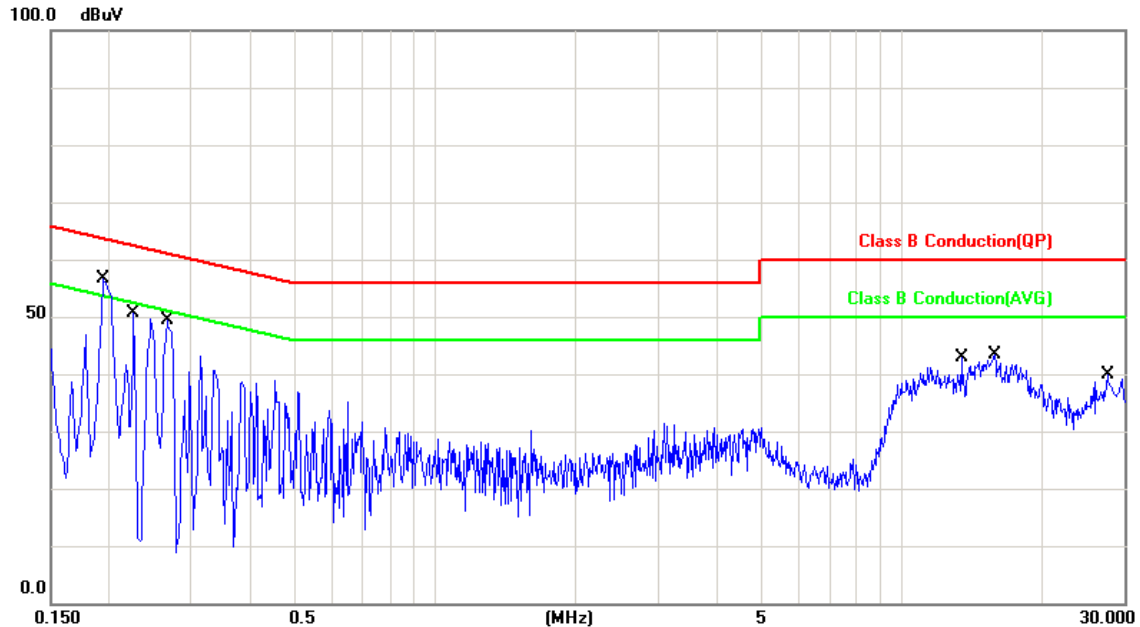


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1940	0.09	52.91	53.00	63.86	-10.86	QP	P
2	0.1940	0.09	37.39	37.48	53.86	-16.38	AVG	P
3	0.2260	0.09	42.74	42.83	62.59	-19.76	QP	P
4	0.2260	0.09	14.73	14.82	52.59	-37.77	AVG	P
5	0.2660	0.09	45.22	45.31	61.24	-15.93	QP	P
6	0.2660	0.09	27.30	27.39	51.24	-23.85	AVG	P
7	13.4740	0.49	34.44	34.93	60.00	-25.07	QP	P
8	13.4740	0.49	26.61	27.10	50.00	-22.90	AVG	P
9	15.8740	0.54	37.74	38.28	60.00	-21.72	QP	P
10	15.8740	0.54	28.78	29.32	50.00	-20.68	AVG	P
11	27.6340	0.72	31.06	31.78	60.00	-28.22	QP	P
12	27.6340	0.72	24.73	25.45	50.00	-24.55	AVG	P

Remarks: 1. Result = Read Value + Factor
2. Factor = LISN (ISN) Factor + Cable Loss



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode 1	: 802.11n HT20, CH1	Temperature	: 24 °C
Test Date	: 2012/02/13	Humidity	: 58 %

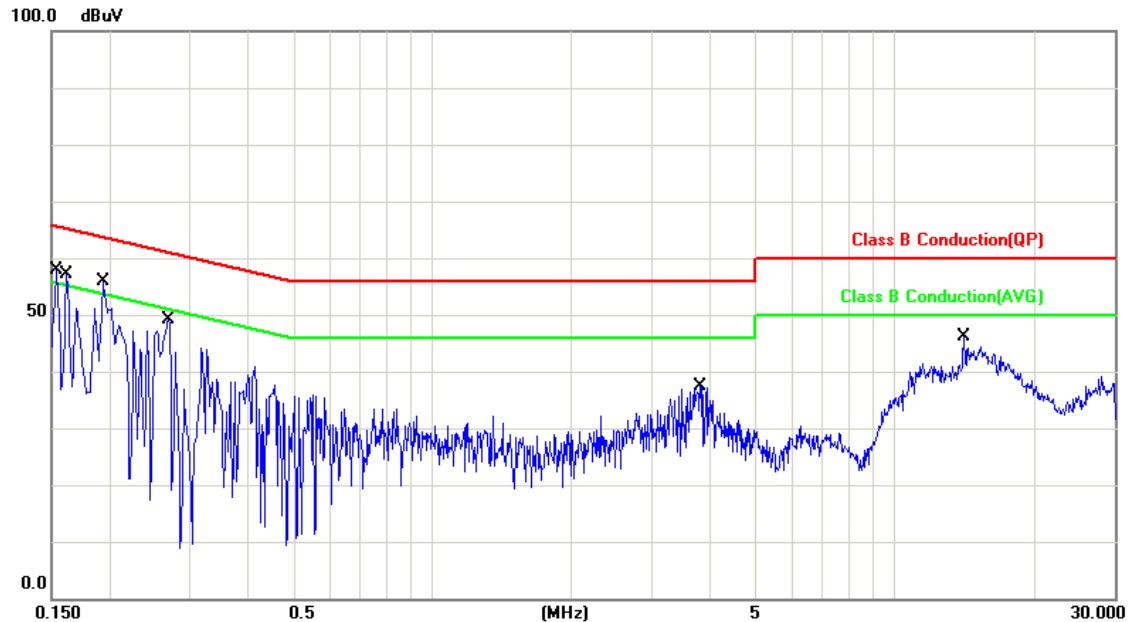


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1539	0.11	50.55	50.66	65.78	-15.12	QP	P
2	0.1539	0.11	26.41	26.52	55.78	-29.26	AVG	P
3	0.1620	0.11	49.67	49.78	65.36	-15.58	QP	P
4	0.1620	0.11	23.17	23.28	55.36	-32.08	AVG	P
5	0.1940	0.11	53.30	53.41	63.86	-10.45	QP	P
6	0.1940	0.11	37.98	38.09	53.86	-15.77	AVG	P
7	0.2700	0.11	45.59	45.70	61.12	-15.42	QP	P
8	0.2700	0.11	28.34	28.45	51.12	-22.67	AVG	P
9	3.8020	0.28	31.77	32.05	56.00	-23.95	QP	P
10	3.8020	0.28	18.09	18.37	46.00	-27.63	AVG	P
11	14.1780	0.52	38.32	38.84	60.00	-21.16	QP	P
12	14.1780	0.52	30.21	30.73	50.00	-19.27	AVG	P

Remarks: 1. Result = Read Value + Factor
2. Factor = LISN (ISN) Factor + Cable Loss



Power	: AC 120V	Pol/Phase	: LINE
Test Mode 1	: 802.11n HT40, CH3	Temperature	: 24 °C
Test Date	: 2012/02/13	Humidity	: 58 %

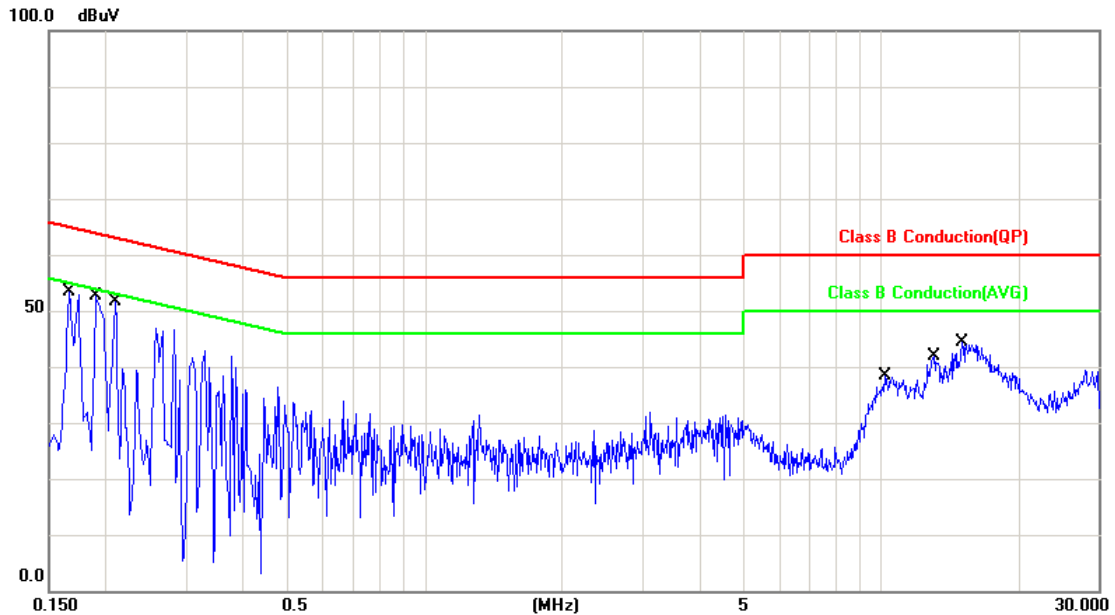


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1660	0.09	48.81	48.90	65.15	-16.25	QP	P
2	0.1660	0.09	25.36	25.45	55.15	-29.70	AVG	P
3	0.1900	0.09	51.97	52.06	64.03	-11.97	QP	P
4	0.1900	0.09	35.88	35.97	54.03	-18.06	AVG	P
5	0.2100	0.09	48.60	48.69	63.20	-14.51	QP	P
6	0.2100	0.09	28.37	28.46	53.20	-24.74	AVG	P
7	10.1820	0.43	32.59	33.02	60.00	-26.98	QP	P
8	10.1820	0.43	23.59	24.02	50.00	-25.98	AVG	P
9	13.1059	0.49	35.03	35.52	60.00	-24.48	QP	P
10	13.1059	0.49	27.70	28.19	50.00	-21.81	AVG	P
11	15.1300	0.53	36.71	37.24	60.00	-22.76	QP	P
12	15.1300	0.53	27.98	28.51	50.00	-21.49	AVG	P

Remarks: 1. Result = Read Value + Factor
2. Factor = LISN (ISN) Factor + Cable Loss



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode 1	: 802.11n HT40, CH3	Temperature	: 24 °C
Test Date	: 2012/02/13	Humidity	: 58 %

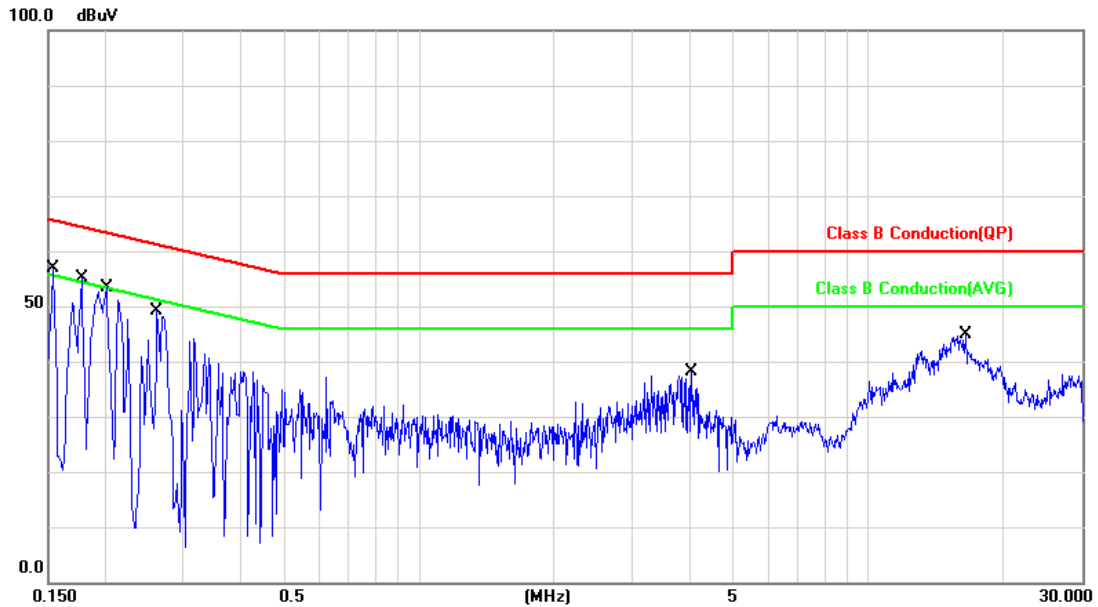


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1539	0.11	50.78	50.89	65.78	-14.89	QP	P
2	0.1539	0.11	26.52	26.63	55.78	-29.15	AVG	P
3	0.1780	0.11	47.32	47.43	64.57	-17.14	QP	P
4	0.1780	0.11	25.16	25.27	54.57	-29.30	AVG	P
5	0.2020	0.11	51.70	51.81	63.52	-11.71	QP	P
6	0.2020	0.11	35.99	36.10	53.52	-17.42	AVG	P
7	0.2620	0.11	45.35	45.46	61.36	-15.90	QP	P
8	0.2620	0.11	29.24	29.35	51.36	-22.01	AVG	P
9	4.0700	0.28	31.47	31.75	56.00	-24.25	QP	P
10	4.0700	0.28	18.37	18.65	46.00	-27.35	AVG	P
11	16.5020	0.56	38.43	38.99	60.00	-21.01	QP	P
12	16.5020	0.56	31.36	31.92	50.00	-18.08	AVG	P

Remarks: 1. Result = Read Value + Factor

2. Factor = LISN (ISN) Factor + Cable Loss



Power	: AC 120V	Pol/Phase	: LINE
Test Mode 2	: 802.11g, CH1	Temperature	: 24 °C
Test Date	: 2012/02/13	Humidity	: 58 %

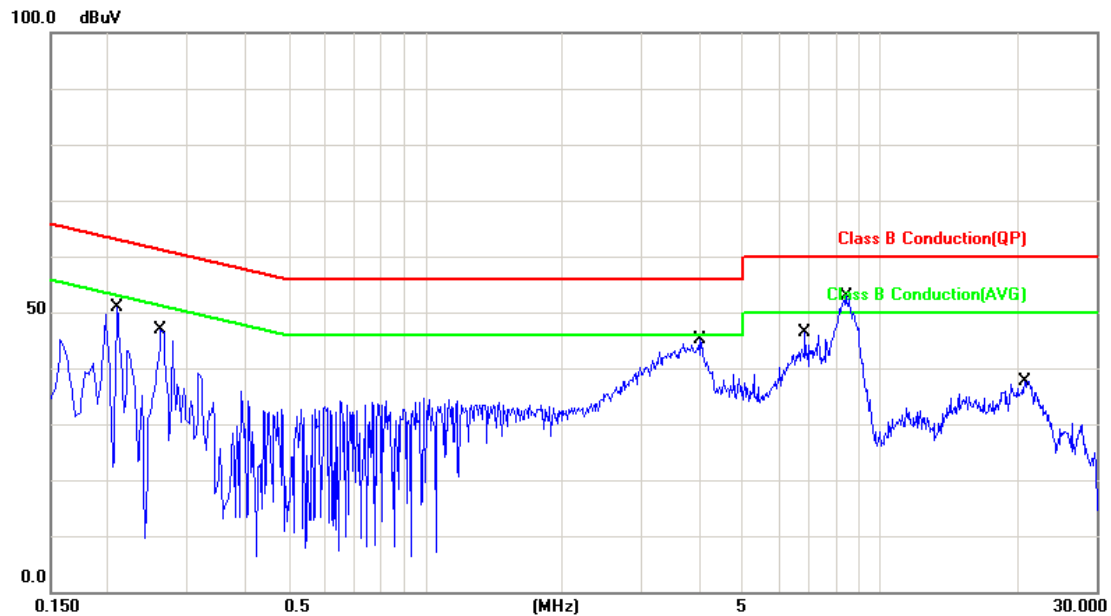


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2100	0.09	46.97	47.06	63.20	-16.14	QP	P
2	0.2100	0.09	29.55	29.64	53.20	-23.56	AVG	P
3	0.2620	0.09	44.41	44.50	61.36	-16.86	QP	P
4	0.2620	0.09	32.48	32.57	51.36	-18.79	AVG	P
5	4.0260	0.27	37.17	37.44	56.00	-18.56	QP	P
6	4.0260	0.27	26.64	26.91	46.00	-19.09	AVG	P
7	6.8660	0.35	38.48	38.83	60.00	-21.17	QP	P
8	6.8660	0.35	30.25	30.60	50.00	-19.40	AVG	P
9	8.4300	0.39	47.63	48.02	60.00	-11.98	QP	P
10	8.4300	0.39	37.67	38.06	50.00	-11.94	AVG	P
11	20.8460	0.63	30.26	30.89	60.00	-29.11	QP	P
12	20.8460	0.63	23.66	24.29	50.00	-25.71	AVG	P

Remarks: 1. Result = Read Value + Factor
2. Factor = LISN (ISN) Factor + Cable Loss



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode 2	: 802.11g, CH1	Temperature	: 24 °C
Test Date	: 2012/02/13	Humidity	: 58 %

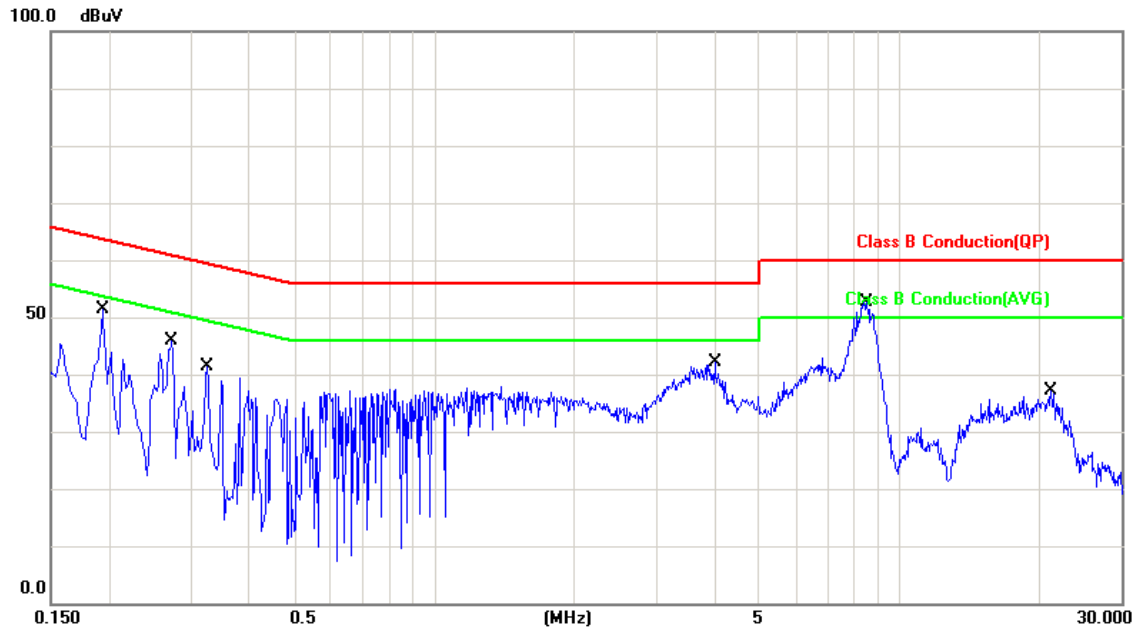


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1940	0.11	49.99	50.10	63.86	-13.76	QP	P
2	0.1940	0.11	36.39	36.50	53.86	-17.36	AVG	P
3	0.2740	0.11	42.48	42.59	60.99	-18.40	QP	P
4	0.2740	0.11	30.35	30.46	50.99	-20.53	AVG	P
5	0.3260	0.10	37.10	37.20	59.55	-22.35	QP	P
6	0.3260	0.10	21.78	21.88	49.55	-27.67	AVG	P
7	4.0140	0.28	35.53	35.81	56.00	-20.19	QP	P
8	4.0140	0.28	26.16	26.44	46.00	-19.56	AVG	P
9	8.5460	0.40	48.06	48.46	60.00	-11.54	QP	P
10	8.5460	0.40	39.76	40.16	50.00	-9.84	AVG	P
11	21.1780	0.65	30.85	31.50	60.00	-28.50	QP	P
12	21.1780	0.65	22.28	22.93	50.00	-27.07	AVG	P

Remarks: 1. Result = Read Value + Factor

2. Factor = LISN (ISN) Factor + Cable Loss



Power	: AC 120V	Pol/Phase	: LINE
Test Mode 2	: 802.11n HT20, CH1	Temperature	: 24 °C
Test Date	: 2012/02/13	Humidity	: 58 %

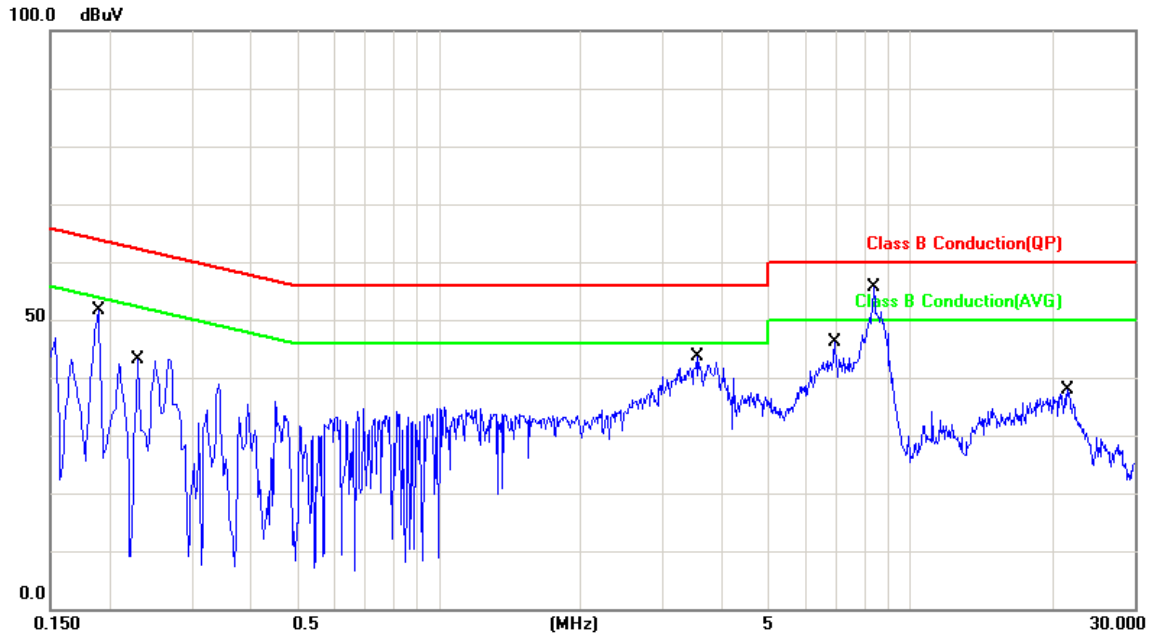


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1900	0.09	48.98	49.07	64.03	-14.96	QP	P
2	0.1900	0.09	35.72	35.81	54.03	-18.22	AVG	P
3	0.2300	0.09	35.55	35.64	62.45	-26.81	QP	P
4	0.2300	0.09	25.02	25.11	52.45	-27.34	AVG	P
5	3.5460	0.26	39.91	40.17	56.00	-15.83	QP	P
6	3.5460	0.26	30.58	30.84	46.00	-15.16	AVG	P
7	6.9500	0.35	38.66	39.01	60.00	-20.99	QP	P
8	6.9500	0.35	30.51	30.86	50.00	-19.14	AVG	P
9	8.4100	0.39	48.95	49.34	60.00	-10.66	QP	P
10	8.4100	0.39	39.57	39.96	50.00	-10.04	AVG	P
11	21.6780	0.64	30.48	31.12	60.00	-28.88	QP	P
12	21.6780	0.64	21.83	22.47	50.00	-27.53	AVG	P

Remarks: 1. Result = Read Value + Factor

2. Factor = LISN (ISN) Factor + Cable Loss



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode 2	: 802.11n HT20, CH1	Temperature	: 24 °C
Test Date	: 2012/02/13	Humidity	: 58 %

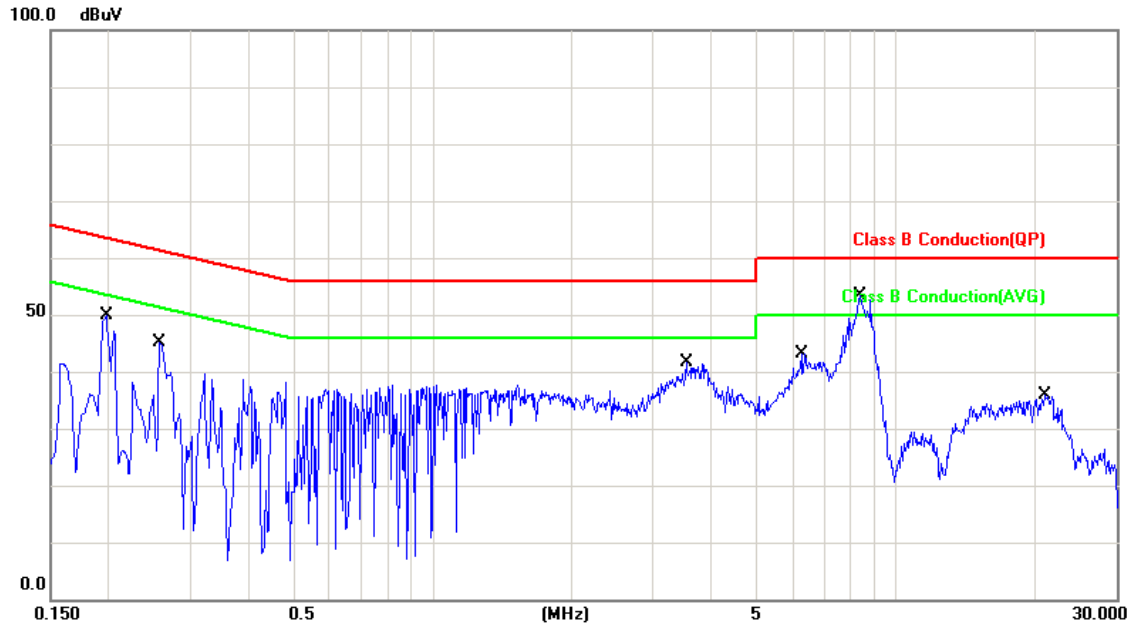


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1980	0.11	47.57	47.68	63.69	-16.01	QP	P
2	0.1980	0.11	35.14	35.25	53.69	-18.44	AVG	P
3	0.2580	0.11	41.61	41.72	61.49	-19.77	QP	P
4	0.2580	0.11	32.11	32.22	51.49	-19.27	AVG	P
5	3.5460	0.27	35.20	35.47	56.00	-20.53	QP	P
6	3.5460	0.27	23.16	23.43	46.00	-22.57	AVG	P
7	6.2580	0.34	36.52	36.86	60.00	-23.14	QP	P
8	6.2580	0.34	26.97	27.31	50.00	-22.69	AVG	P
9	8.3900	0.39	47.76	48.15	60.00	-11.85	QP	P
10	8.3900	0.39	39.30	39.69	50.00	-10.31	AVG	P
11	21.0060	0.65	30.33	30.98	60.00	-29.02	QP	P
12	21.0060	0.65	23.32	23.97	50.00	-26.03	AVG	P

Remarks: 1. Result = Read Value + Factor
2. Factor = LISN (ISN) Factor + Cable Loss



Power	: AC 120V	Pol/Phase	: LINE
Test Mode 2	: 802.11n HT40, CH3	Temperature	: 24 °C
Test Date	: 2012/02/13	Humidity	: 58 %

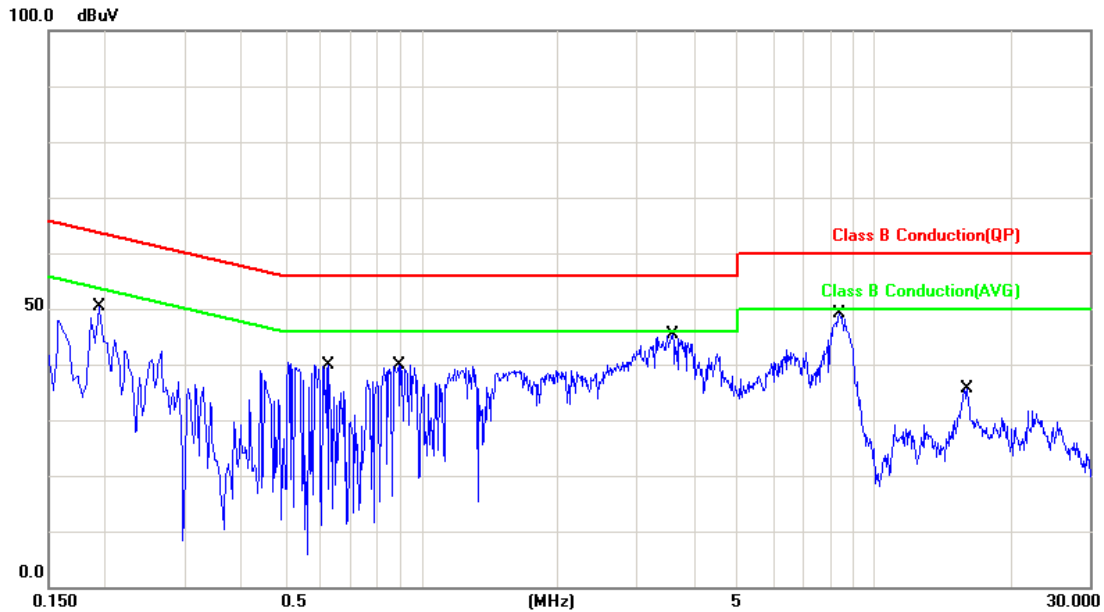


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1940	0.09	49.83	49.92	63.86	-13.94	QP	P
2	0.1940	0.09	37.70	37.79	53.86	-16.07	AVG	P
3	0.6260	0.11	37.94	38.05	56.00	-17.95	QP	P
4	0.6260	0.11	19.54	19.65	46.00	-26.35	AVG	P
5	0.8940	0.14	37.99	38.13	56.00	-17.87	QP	P
6	0.8940	0.14	26.15	26.29	46.00	-19.71	AVG	P
7	3.5980	0.26	40.78	41.04	56.00	-14.96	QP	P
8	3.5980	0.26	30.36	30.62	46.00	-15.38	AVG	P
9	8.3780	0.39	43.28	43.67	60.00	-16.33	QP	P
10	8.3780	0.39	32.64	33.03	50.00	-16.97	AVG	P
11	16.0900	0.54	29.18	29.72	60.00	-30.28	QP	P
12	16.0900	0.54	22.04	22.58	50.00	-27.42	AVG	P

Remarks: 1. Result = Read Value + Factor

2. Factor = LISN (ISN) Factor + Cable Loss



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode 2	: 802.11n HT40, CH3	Temperature	: 24 °C
Test Date	: 2012/02/13	Humidity	: 58 %

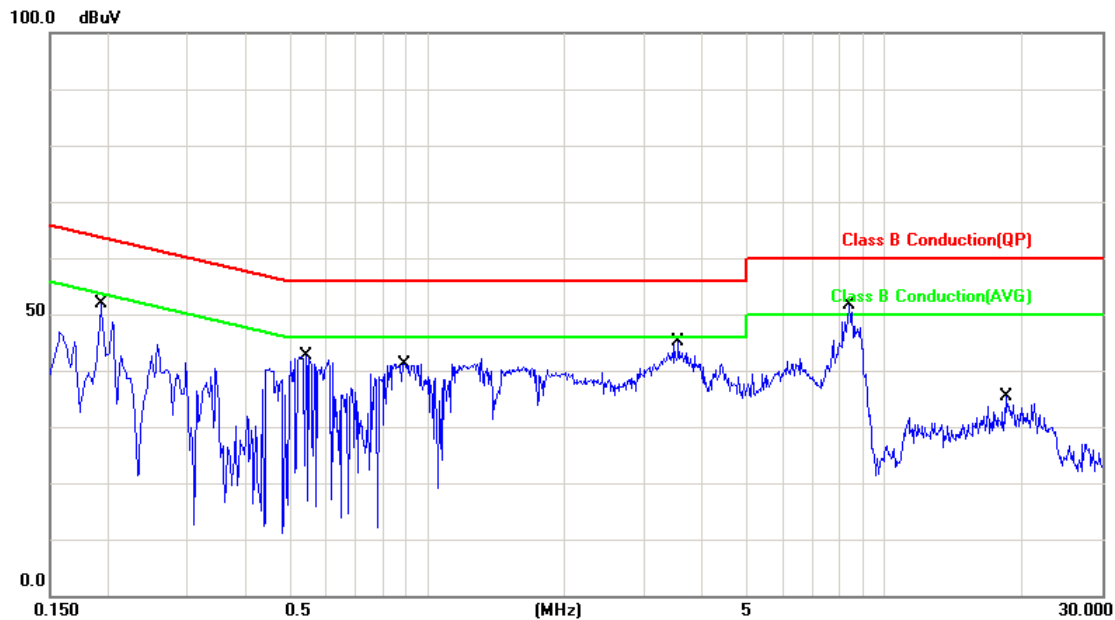

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1940	0.11	48.92	49.03	63.86	-14.83	QP	P
2	0.1940	0.11	37.60	37.71	53.86	-16.15	AVG	P
3	0.5460	0.11	41.13	41.24	56.00	-14.76	QP	P
4	0.5460	0.11	26.87	26.98	46.00	-19.02	AVG	P
5	0.8980	0.15	39.60	39.75	56.00	-16.25	QP	P
6	0.8980	0.15	27.66	27.81	46.00	-18.19	AVG	P
7	3.5500	0.27	38.95	39.22	56.00	-16.78	QP	P
8	3.5500	0.27	27.62	27.89	46.00	-18.11	AVG	P
9	8.3940	0.39	43.12	43.51	60.00	-16.49	QP	P
10	8.3940	0.39	32.85	33.24	50.00	-16.76	AVG	P
11	18.4340	0.60	31.36	31.96	60.00	-28.04	QP	P
12	18.4340	0.60	26.53	27.13	50.00	-22.87	AVG	P

Remarks: 1. Result = Read Value + Factor
2. Factor = LISN (ISN) Factor + Cable Loss

Test engineer: Ben




4.6 Test Photographs

Front View



Rear View

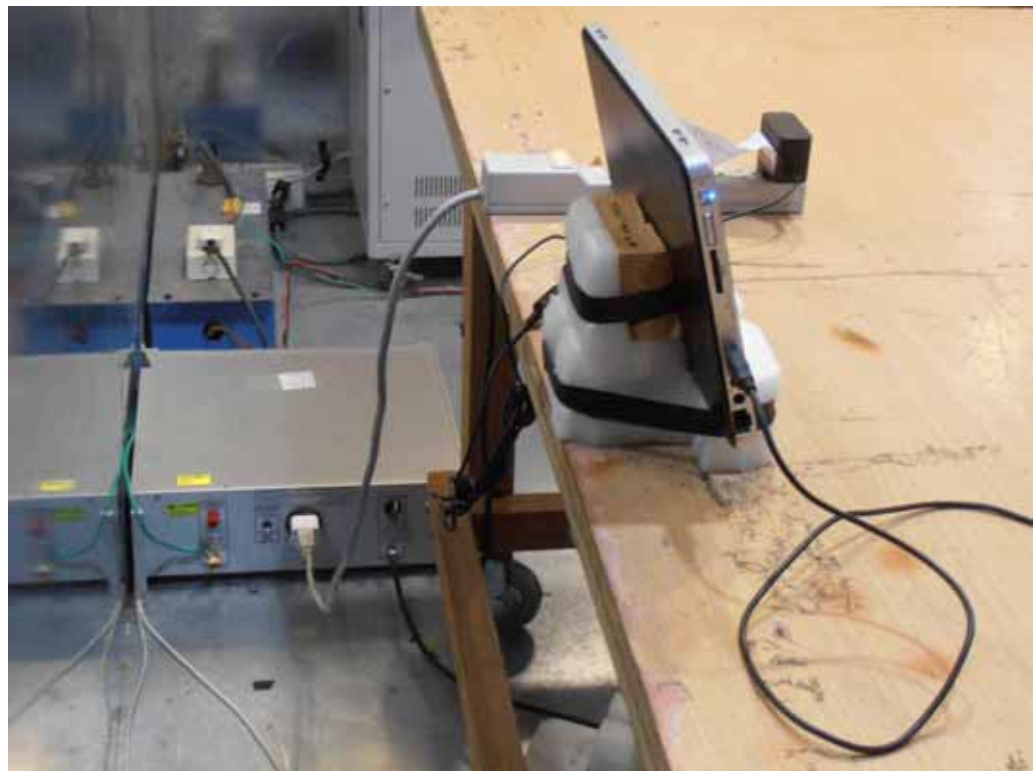



5. Test of Radiated Emission

5.1 Test Limit

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2009. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions for unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance Meters	Radiated (μ V / M)	Radiated (dB μ V/ M)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0

For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the below table.

Frequency (MHz)	Distance Meters	Radiated (dB μ V/ M)
30-230	10	30
230-1000	10	37


5.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.




5.3 Typical Test Setup

Below 1GHz Test Setup

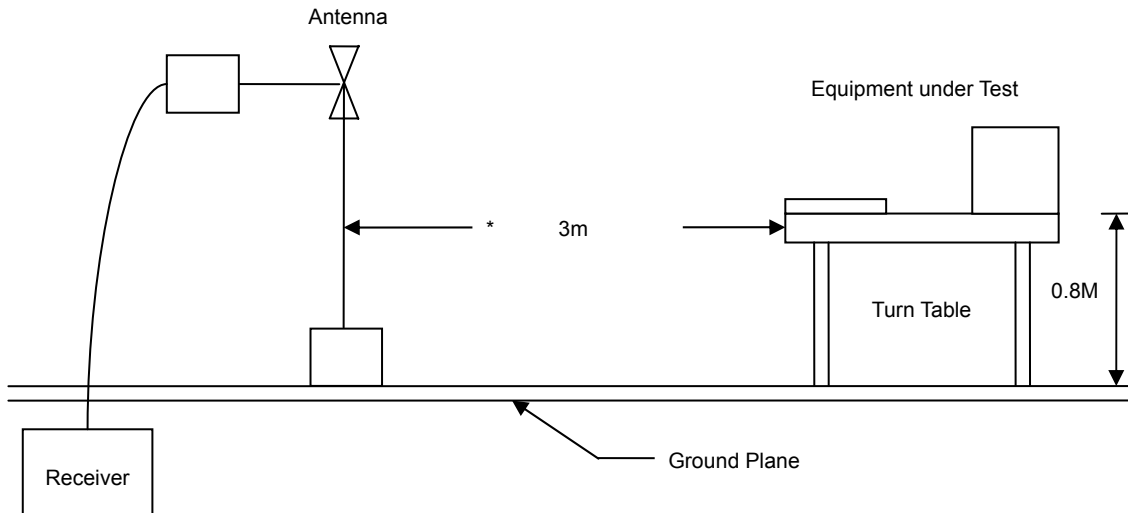

Above 1GHz Test Setup

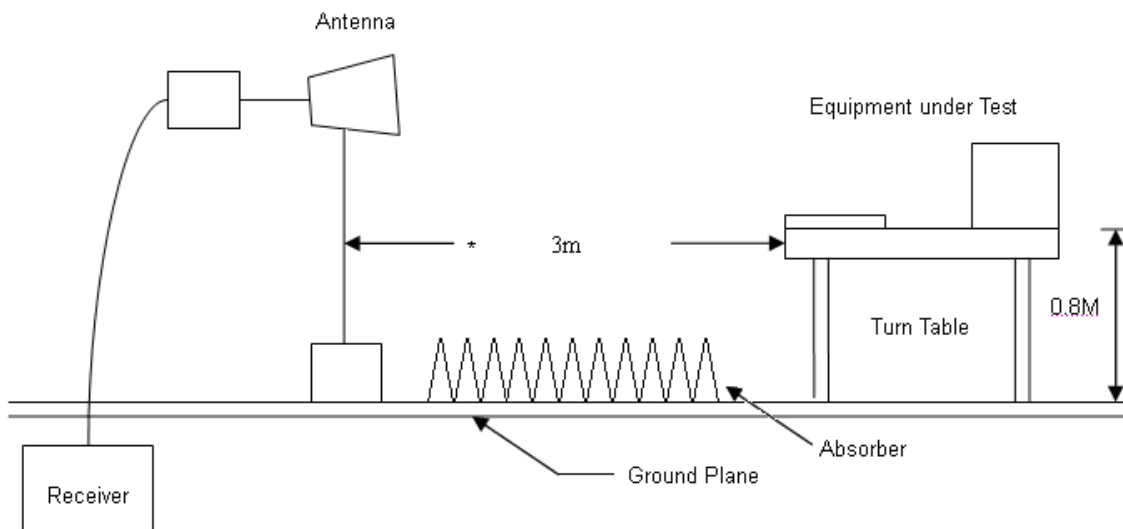


5.4 Measurement Equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
Amplifier	Agilent	8447D	2944A10531	2012/01/13	2013/01/12
Bilog Antenna	Schaffner	CBL6112D	22242	2012/01/12	2013/01/11
EMI Receiver	R&S	ESCI	101200	2011/07/26	2012/07/25
Spectrum Analyzer	R&S	FSP40	100047	2011/05/05	2012/05/04
Horn Antenna	EMCO	3115	31589	2011/05/02	2012/05/01
Preamplifier	Agilent	8449B	3008A01954	2011/03/02	2012/03/01



5.5 Test Result and Data

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11g, CH1	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

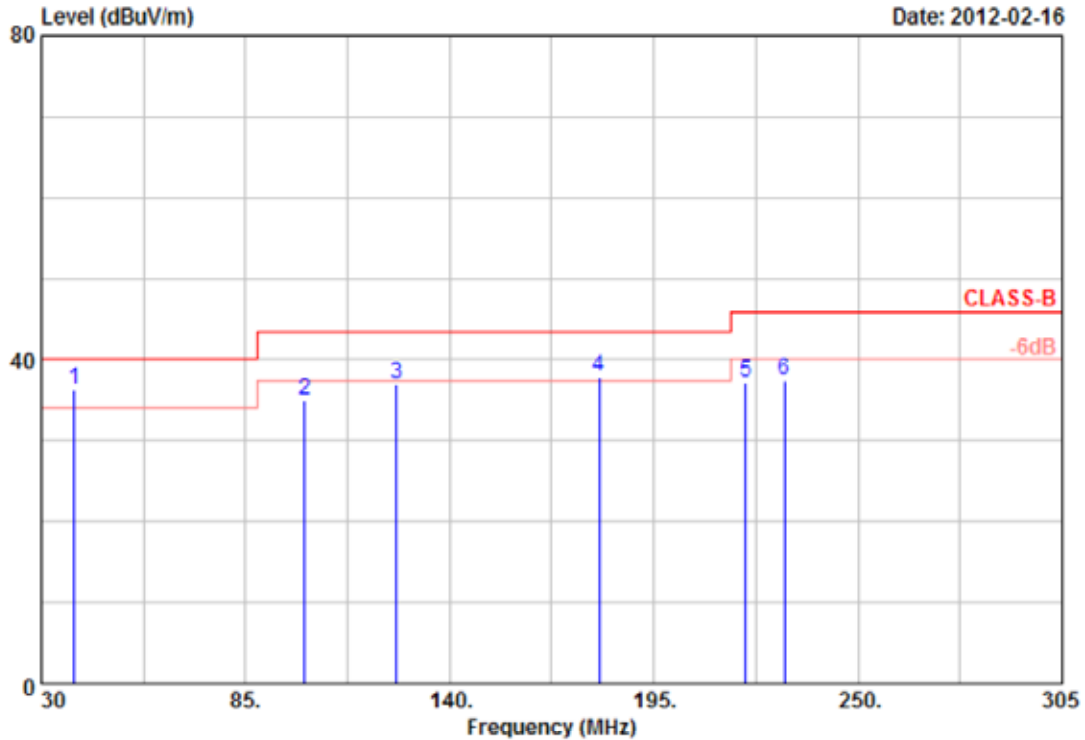


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	38.80	37.95	-1.68	36.27	40.00	-3.73	QP	100	360
2	100.95	43.62	-8.56	35.06	43.50	-8.44	Peak	100	360
3	125.70	42.48	-5.38	37.10	43.50	-6.40	Peak	100	360
4	180.15	43.00	-5.15	37.85	43.50	-5.65	QP	100	360
5	219.75	43.31	-6.04	37.27	46.00	-8.73	Peak	100	360
6	230.20	45.19	-7.84	37.35	46.00	-8.65	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11g, CH1	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

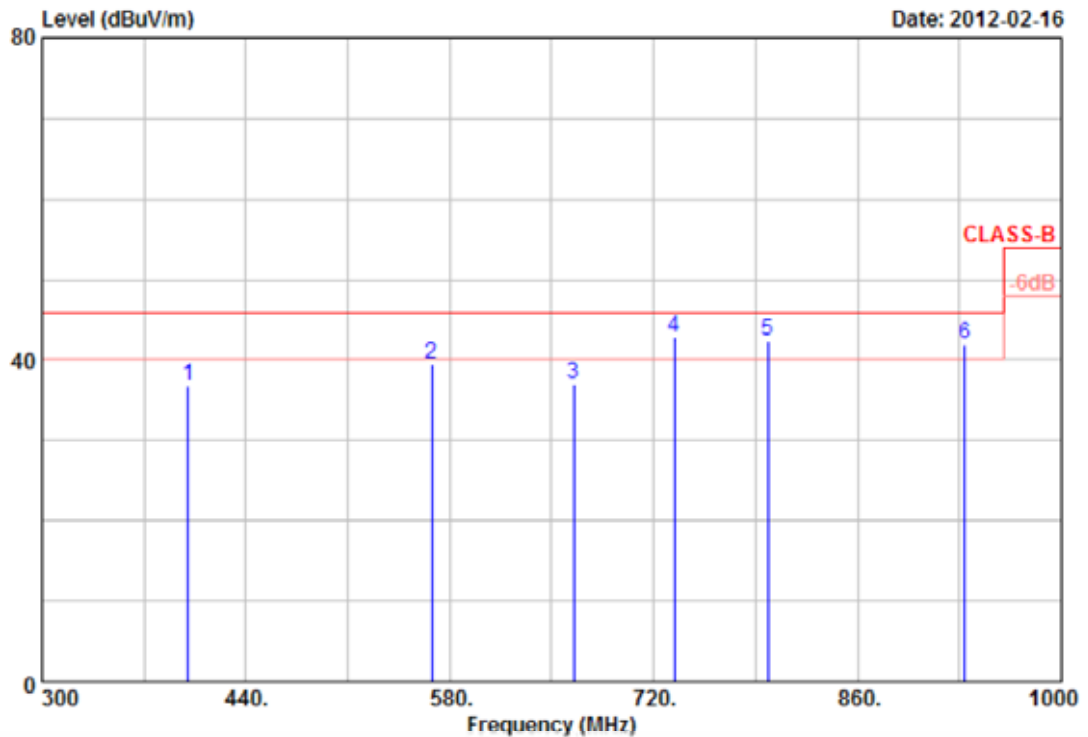


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	400.10	42.09	-5.39	36.70	46.00	-9.30	Peak	100	0
2	567.40	32.39	7.11	39.50	46.00	-6.50	Peak	100	0
3	665.40	38.36	-1.31	37.05	46.00	-8.95	Peak	100	0
4	734.00	35.82	6.92	42.74	46.00	-3.26	QP	100	0
5	798.40	36.52	5.82	42.34	46.00	-3.66	QP	100	0
6	933.50	32.46	9.44	41.90	46.00	-4.10	QP	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11g, CH1	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

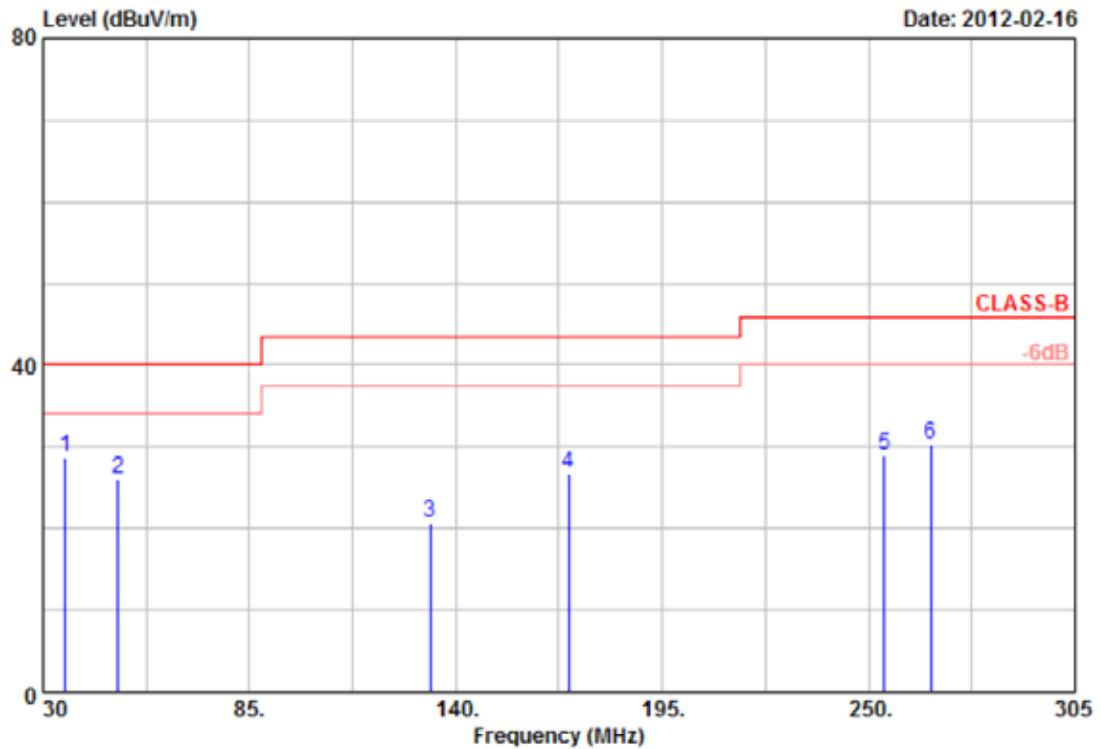


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	36.05	35.44	-6.78	28.66	40.00	-11.34	Peak	100	360
2	50.08	35.16	-9.08	26.08	40.00	-13.92	Peak	100	360
3	133.13	36.45	-15.79	20.66	43.50	-22.84	Peak	100	360
4	169.98	37.65	-10.97	26.68	43.50	-16.82	Peak	100	360
5	254.13	42.39	-13.51	28.88	46.00	-17.12	Peak	100	360
6	266.50	44.31	-13.94	30.37	46.00	-15.63	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11g, CH1	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

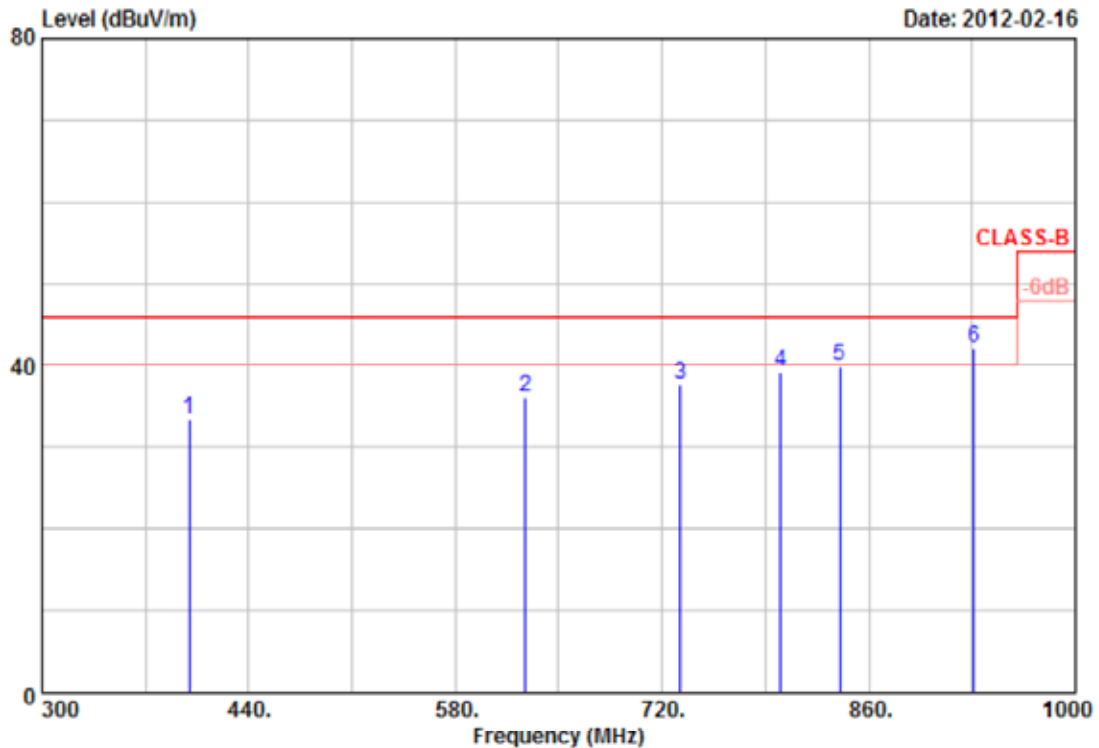


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	399.40	42.80	-9.28	33.52	46.00	-12.48	Peak	100	0
2	627.60	32.14	3.92	36.06	46.00	-9.94	Peak	100	0
3	732.60	33.68	3.98	37.66	46.00	-8.34	Peak	100	0
4	800.50	33.16	6.14	39.30	46.00	-6.70	Peak	100	0
5	840.40	31.35	8.52	39.87	46.00	-6.13	Peak	100	0
6	931.40	35.53	6.64	42.17	46.00	-3.83	QP	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11b, CH1	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

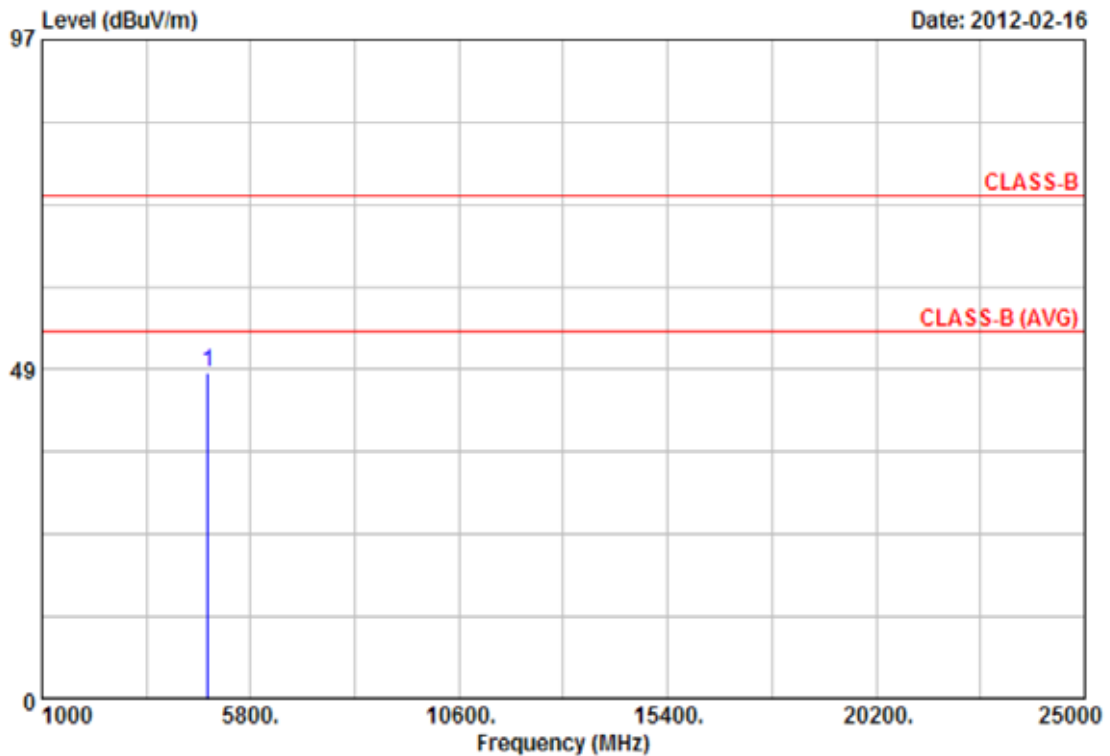


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4825.34	42.54	5.64	48.18	74.00	-25.82	Peak	130	201

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11b, CH1	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

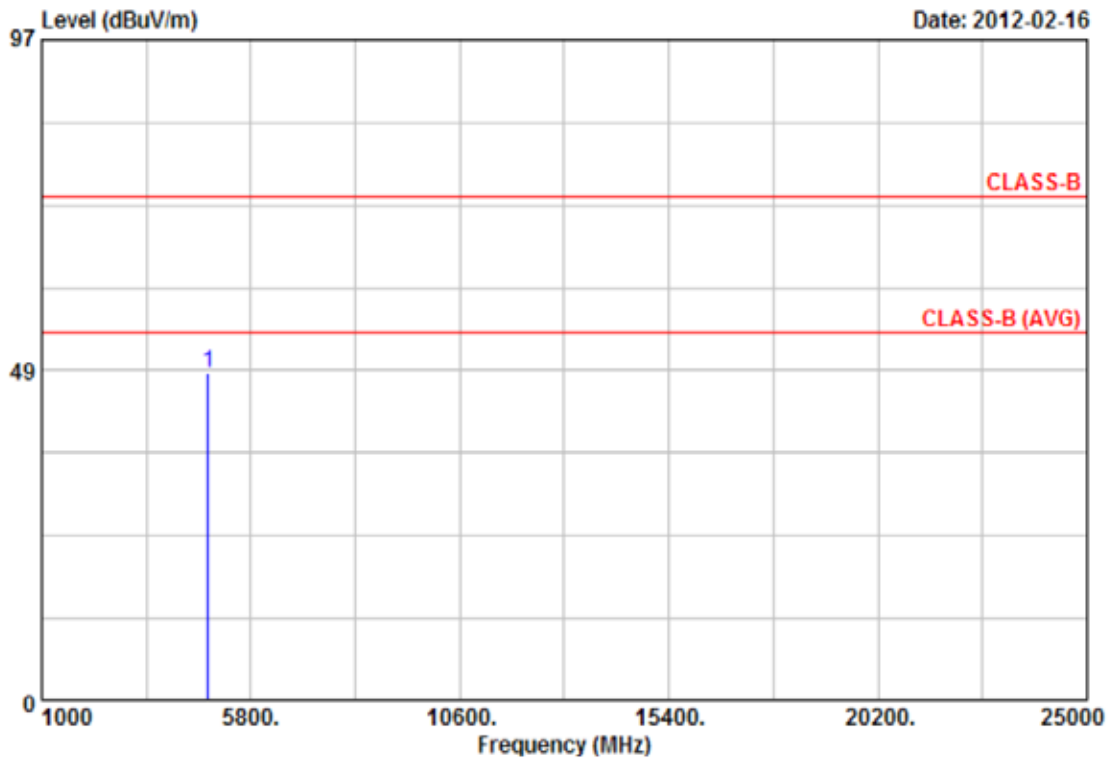


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.50	44.16	3.95	48.11	74.00	-25.89	Peak	130	58

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11b, CH6	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

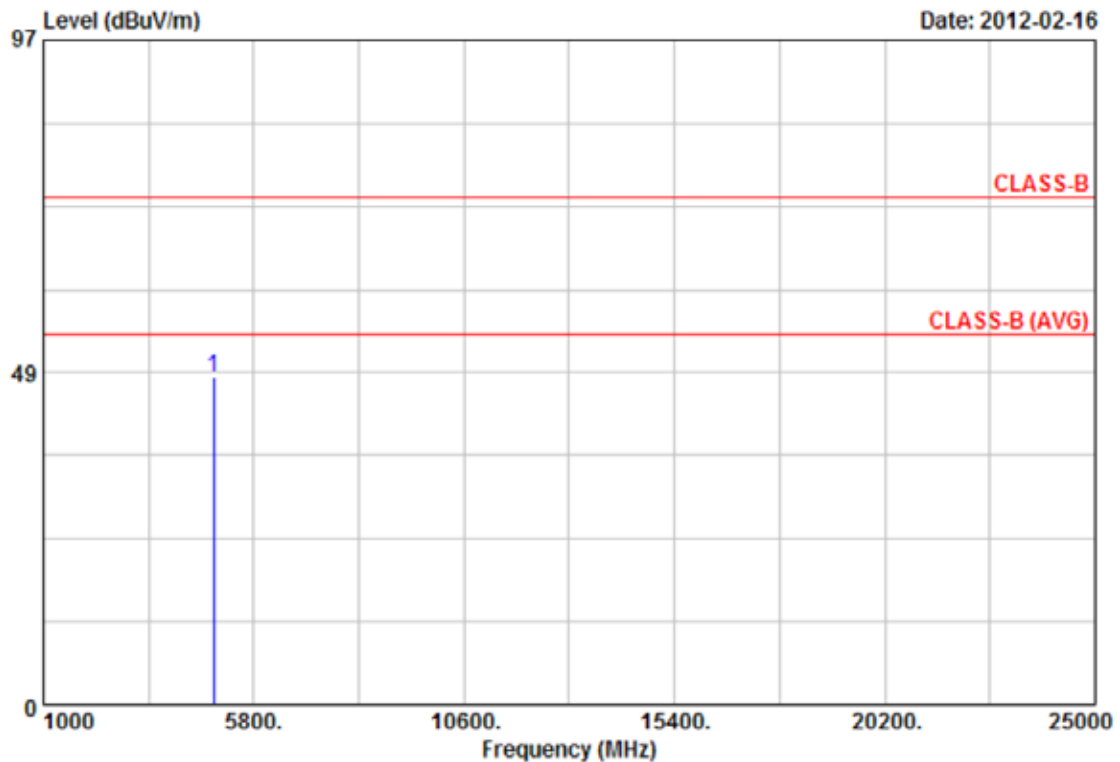


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.13	41.19	6.57	47.76	74.00	-26.24	Peak	130	201

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11b, CH6	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

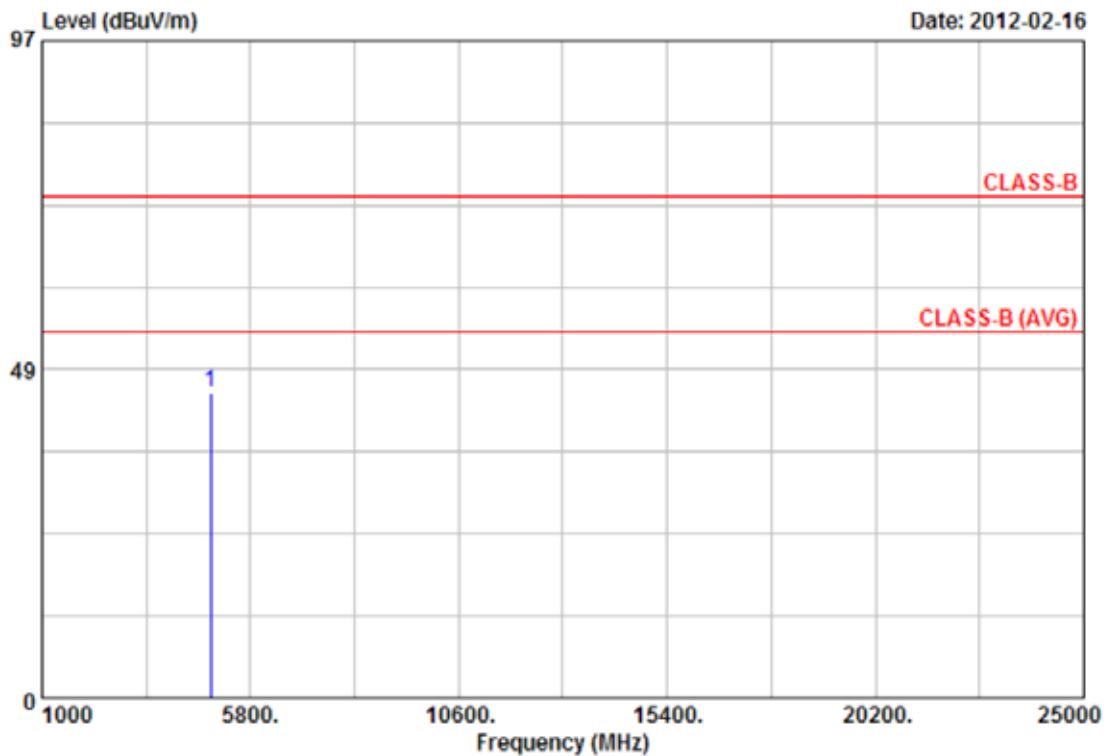


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.11	40.46	4.73	45.19	74.00	-28.81	Peak	130	58

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11b, CH11	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

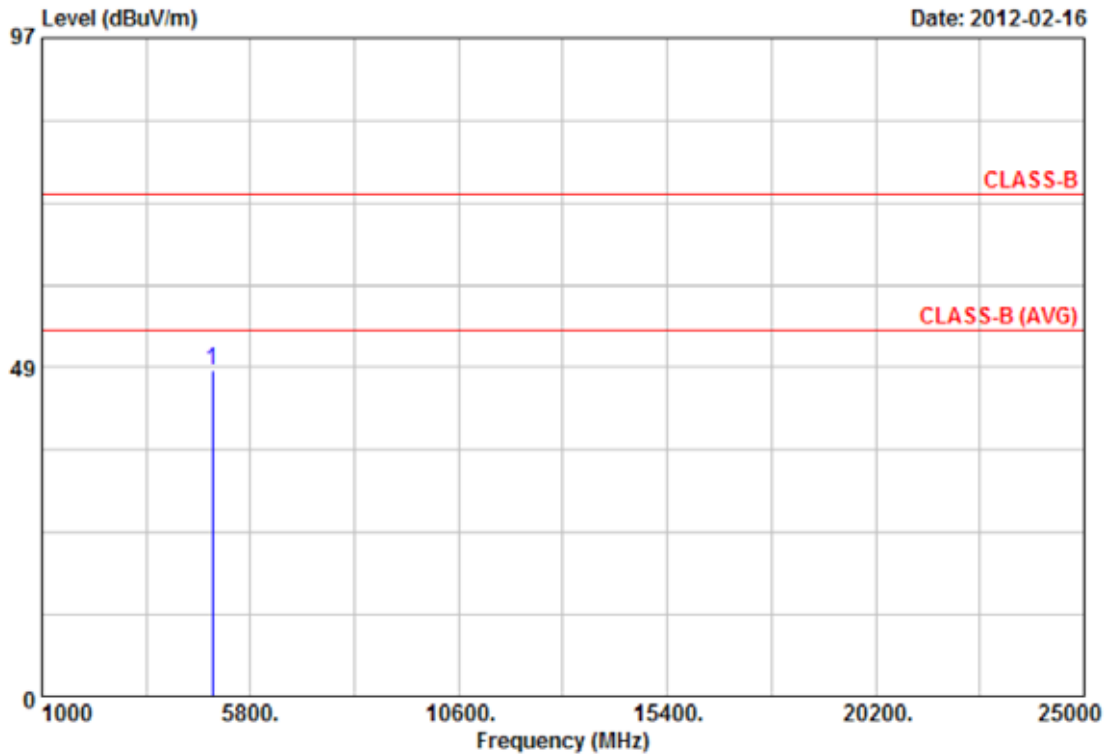


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4924.51	41.05	7.16	48.21	74.00	-25.79	Peak	130	201

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11b, CH11	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

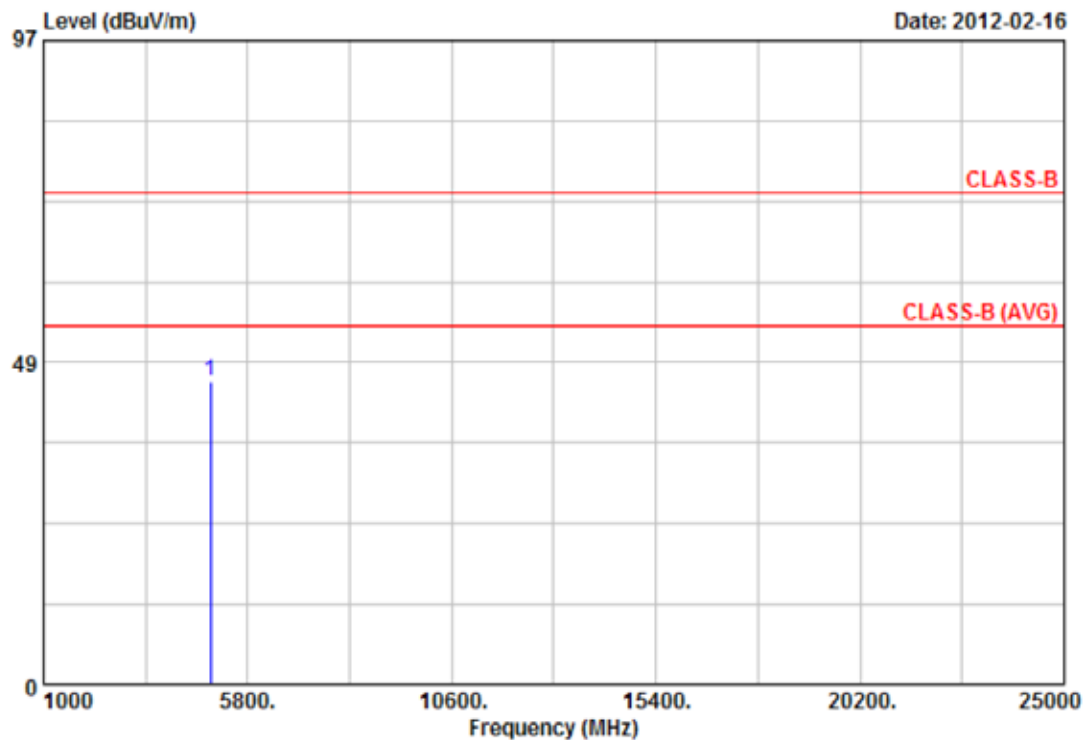


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4926.03	40.64	5.15	45.79	74.00	-28.21	Peak	130	58

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11g, CH1	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

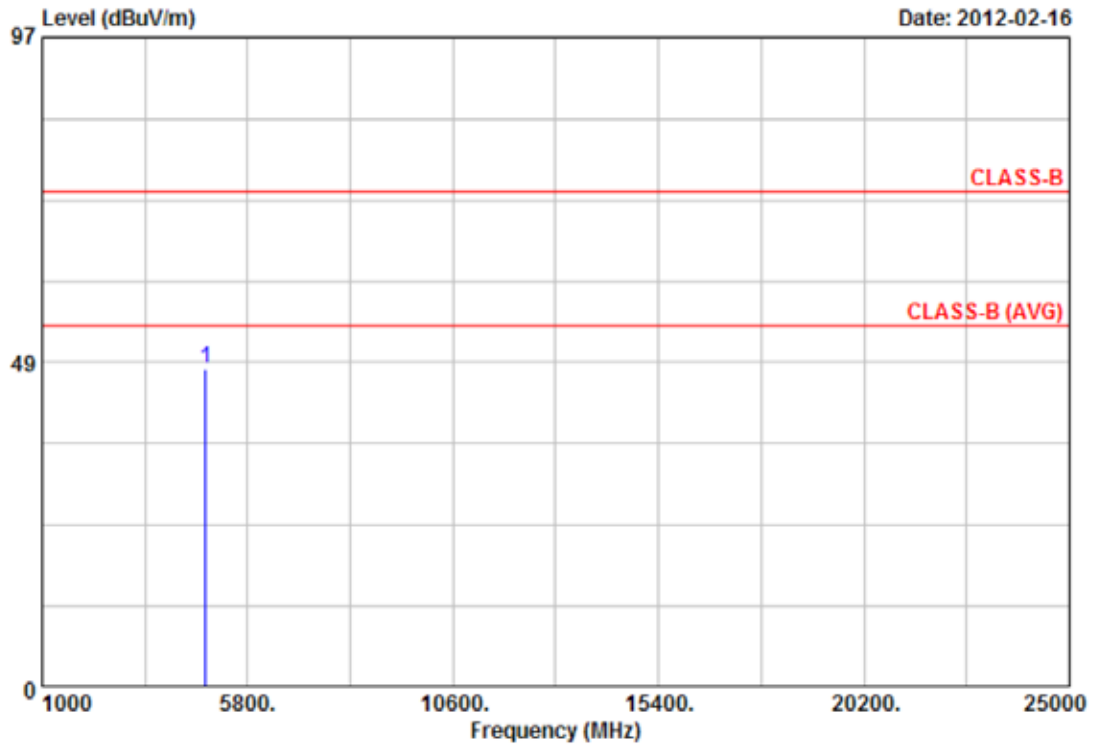


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4825.30	41.96	5.64	47.60	74.00	-26.40	Peak	130	201

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11g, CH1	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

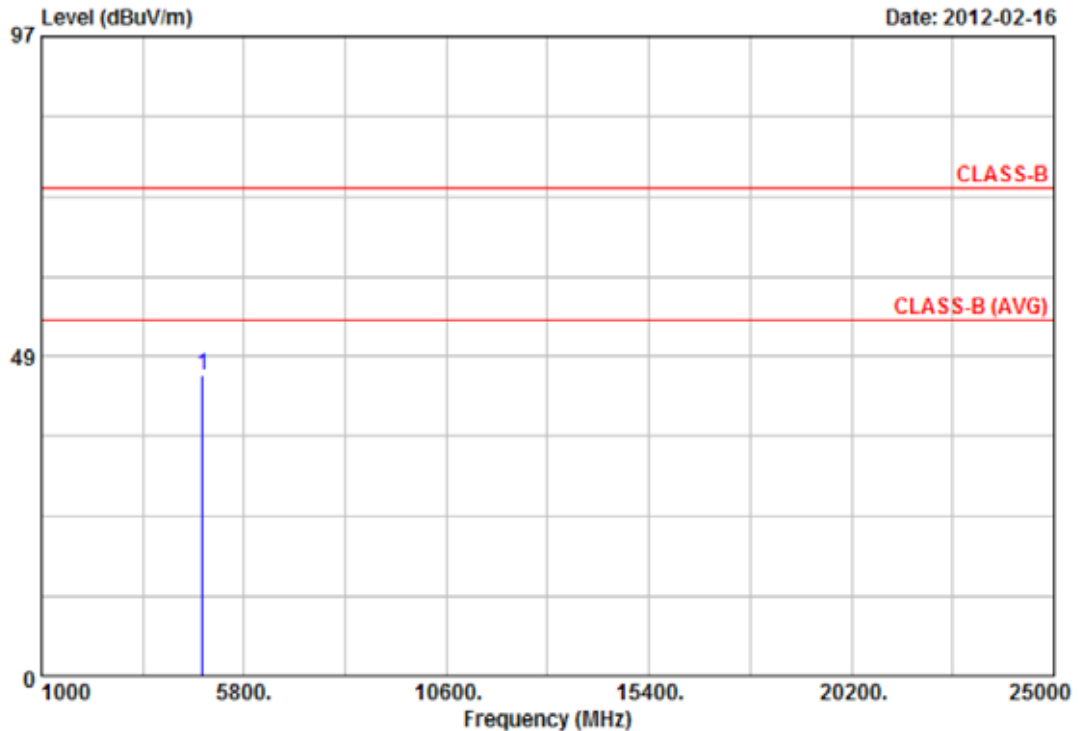


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4825.33	41.63	3.97	45.60	74.00	-28.40	Peak	130	58

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11g, CH6	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

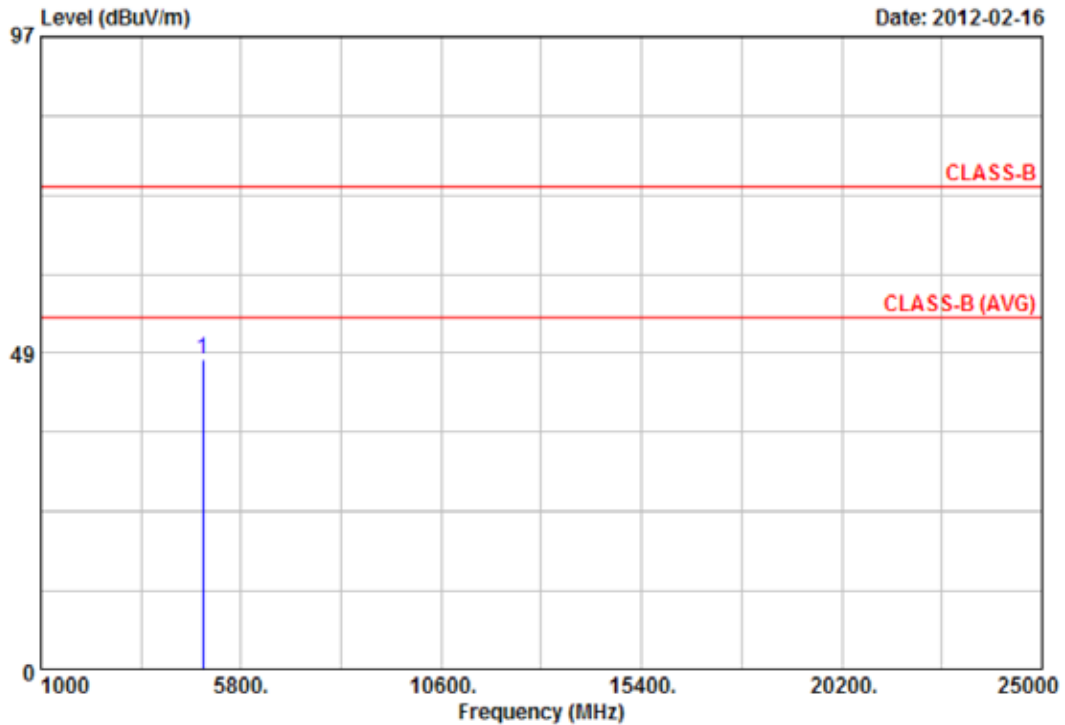


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4875.25	40.82	6.62	47.44	74.00	-26.56	Peak	130	201

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11g, CH6	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

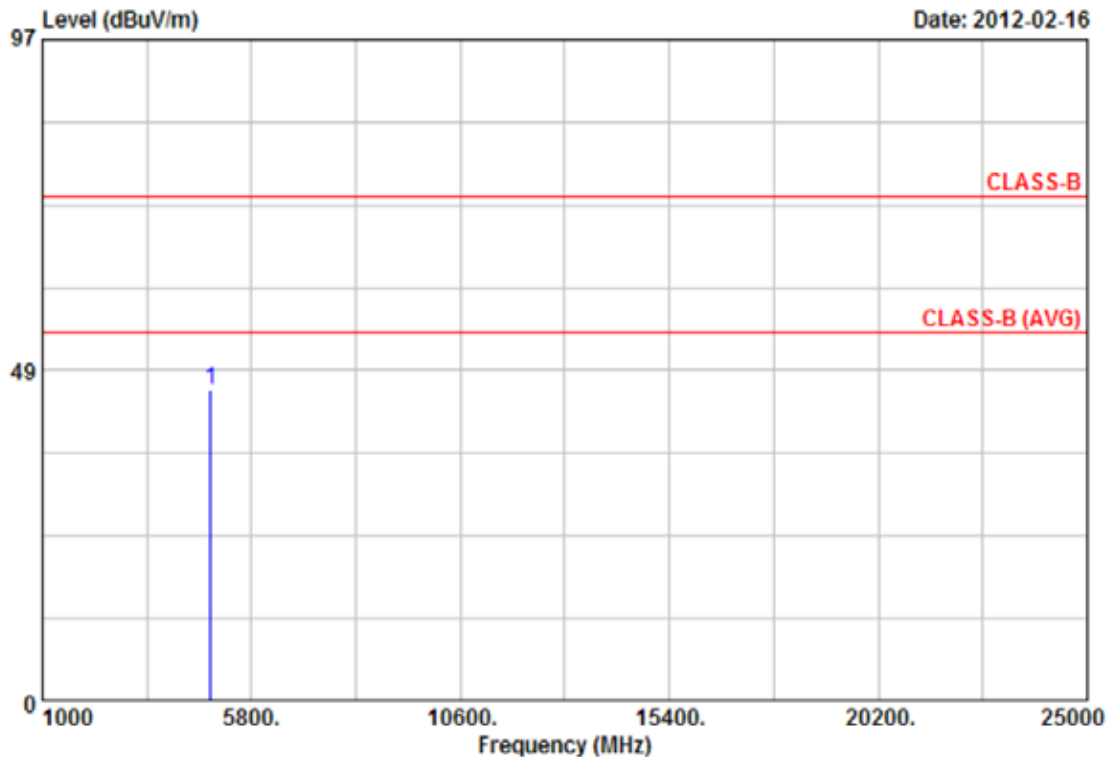


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4872.61	41.00	4.71	45.71	74.00	-28.29	Peak	130	58

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11g, CH11	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

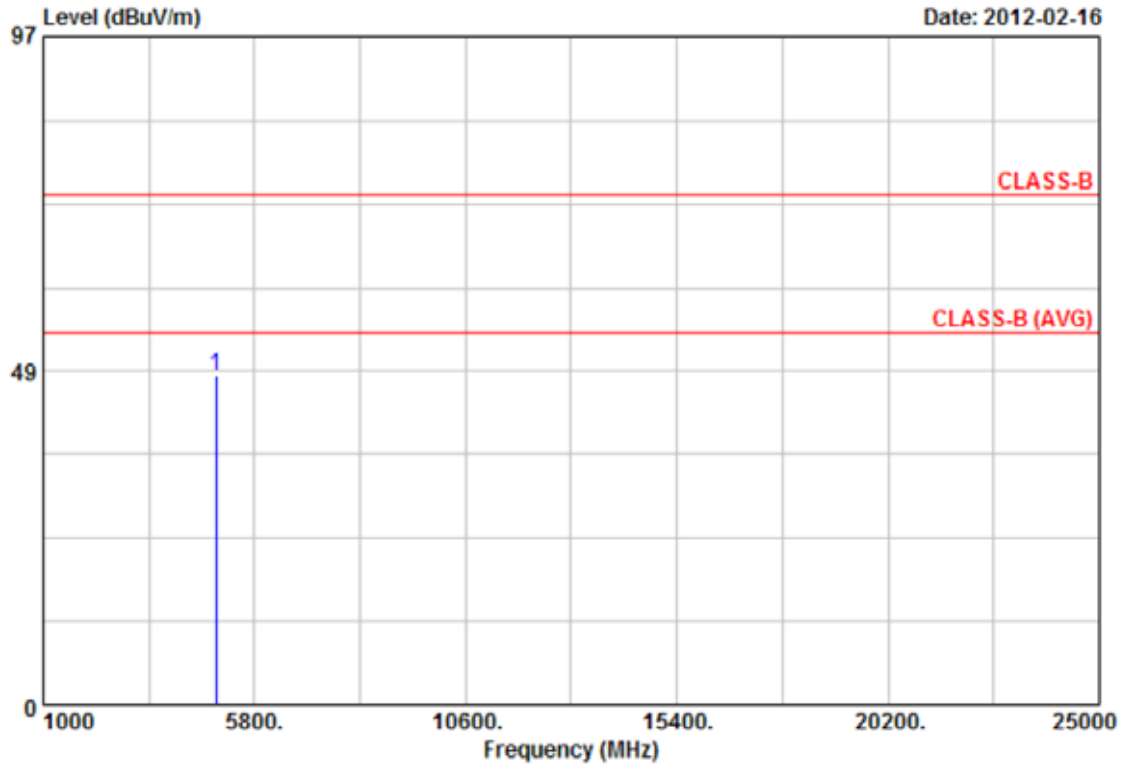


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4924.56	40.54	7.16	47.70	74.00	-26.30	Peak	130	201

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11g, CH11	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

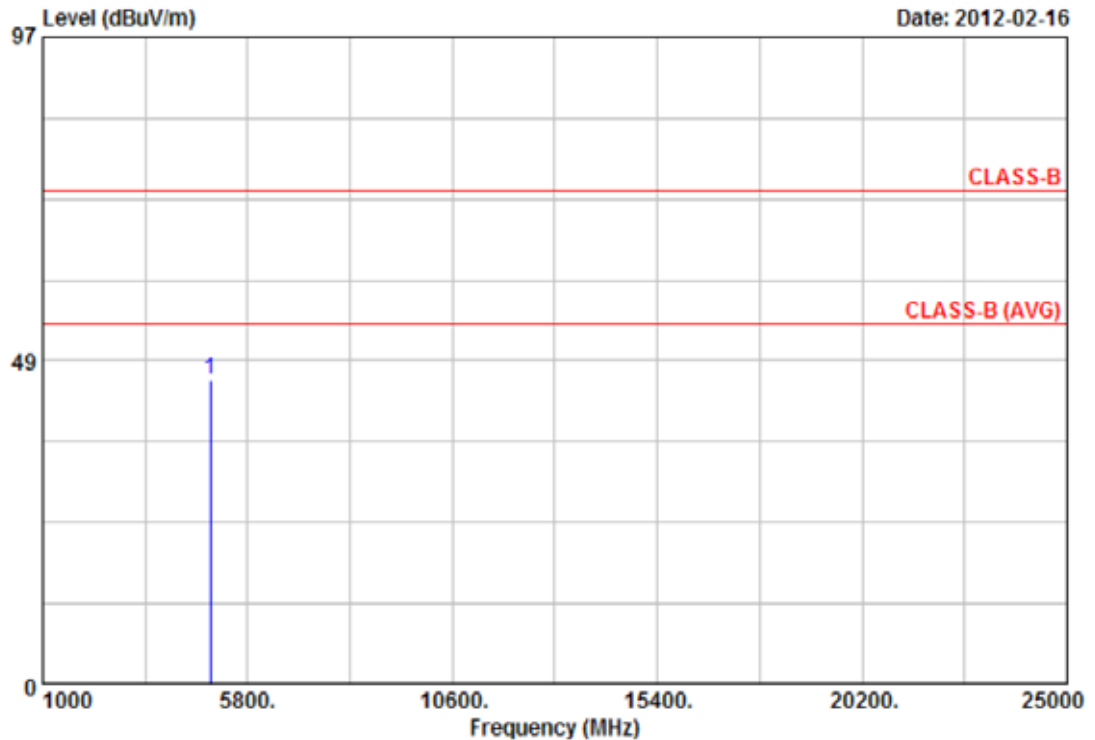


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4925.75	40.61	5.15	45.76	74.00	-28.24	Peak	130	58

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11n HT20, CH1	Temperatur	: 20 °C
Memo	:	Humidity	: 68 %

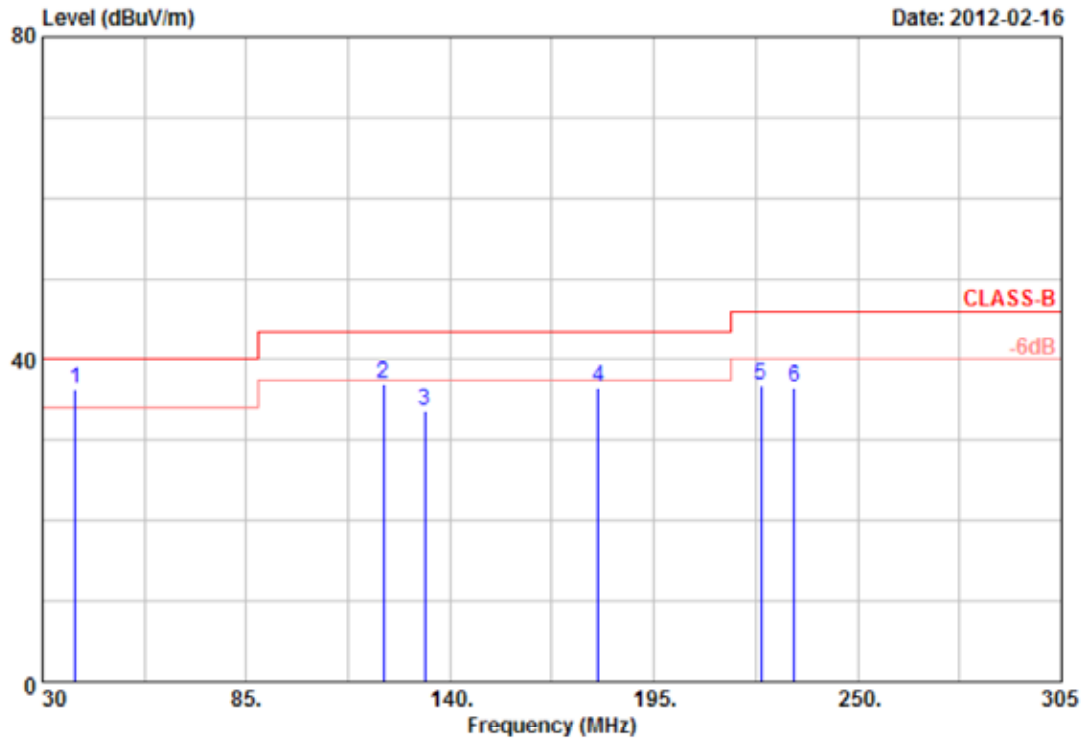


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	38.80	37.91	-1.68	36.23	40.00	-3.77	QP	100	360
2	122.13	41.68	-4.76	36.92	43.50	-6.58	Peak	100	360
3	133.13	40.61	-6.90	33.71	43.50	-9.79	Peak	100	360
4	179.88	41.62	-5.06	36.56	43.50	-6.94	Peak	100	360
5	223.88	43.51	-6.63	36.88	46.00	-9.12	Peak	100	360
6	232.95	44.38	-7.85	36.53	46.00	-9.47	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11n HT20, CH1	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

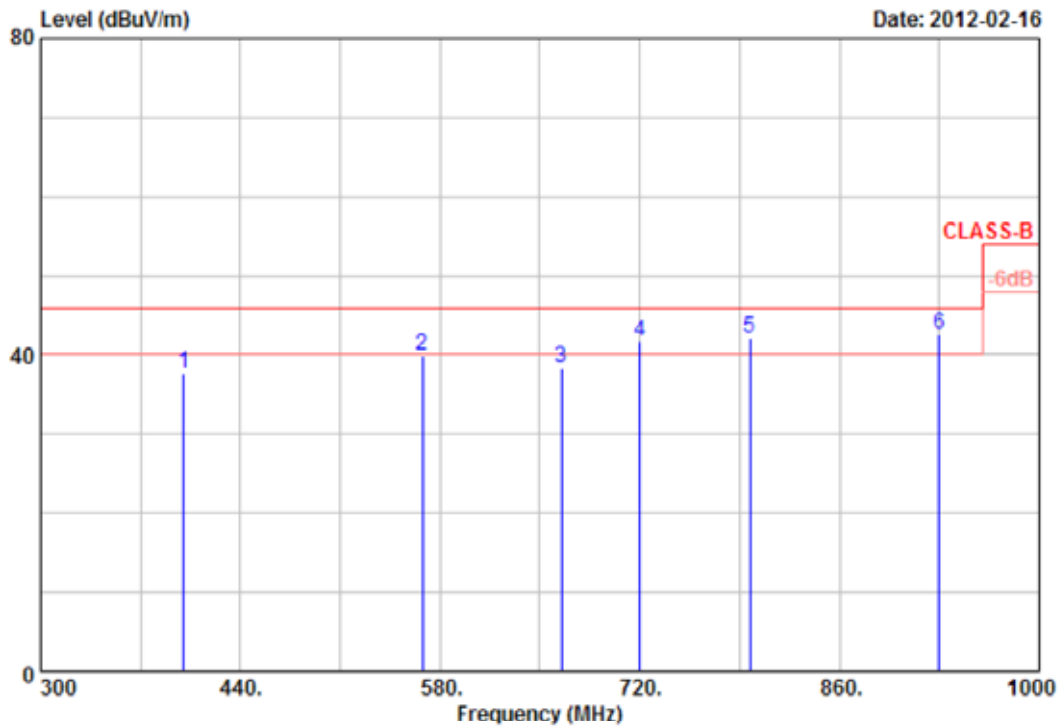


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	400.10	42.94	-5.39	37.55	46.00	-8.45	Peak	100	0
2	567.40	32.67	7.11	39.78	46.00	-6.22	Peak	100	0
3	665.40	39.69	-1.31	38.38	46.00	-7.62	Peak	100	0
4	720.00	35.23	6.41	41.64	46.00	-4.36	QP	100	0
5	797.00	36.17	5.94	42.11	46.00	-3.89	QP	100	0
6	930.00	33.92	8.73	42.65	46.00	-3.35	QP	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11n HT20, CH1	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

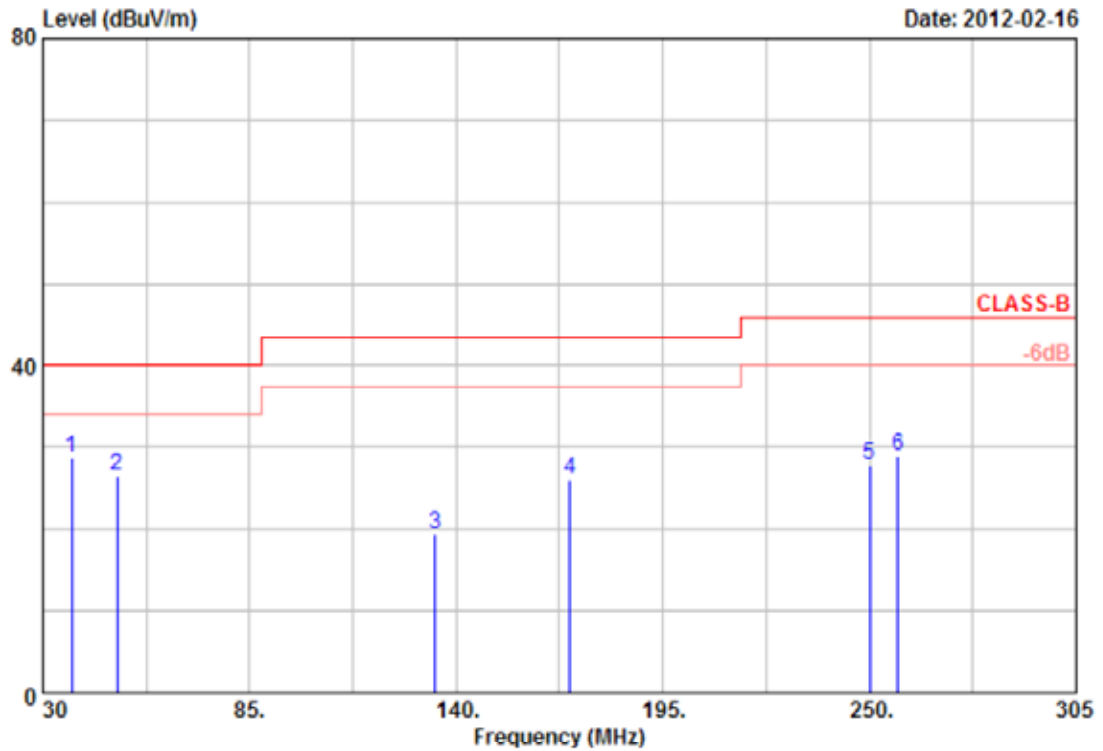


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	37.70	35.81	-7.05	28.76	40.00	-11.24	Peak	100	360
2	49.80	35.51	-9.01	26.50	40.00	-13.50	Peak	100	360
3	134.50	34.35	-14.98	19.37	43.50	-24.13	Peak	100	360
4	170.25	37.41	-11.29	26.12	43.50	-17.38	Peak	100	360
5	250.00	41.45	-13.52	27.93	46.00	-18.07	Peak	100	360
6	257.70	42.35	-13.37	28.98	46.00	-17.02	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11n HT20, CH1	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

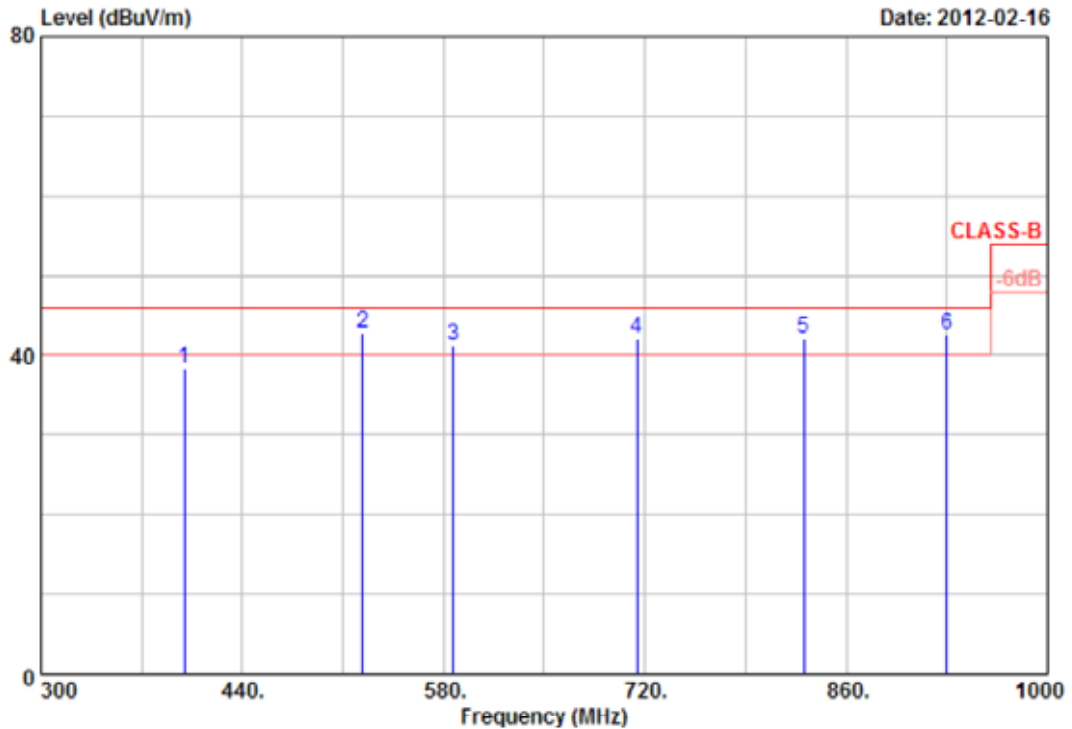


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	399.40	47.51	-9.28	38.23	46.00	-7.77	Peak	100	0
2	524.00	41.49	1.25	42.74	46.00	-3.26	QP	100	0
3	587.00	39.55	1.67	41.22	46.00	-4.78	QP	100	0
4	714.40	38.87	3.26	42.13	46.00	-3.87	QP	100	0
5	830.60	33.54	8.59	42.13	46.00	-3.87	QP	100	0
6	930.00	35.68	6.82	42.50	46.00	-3.50	QP	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11n HT20, CH1	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

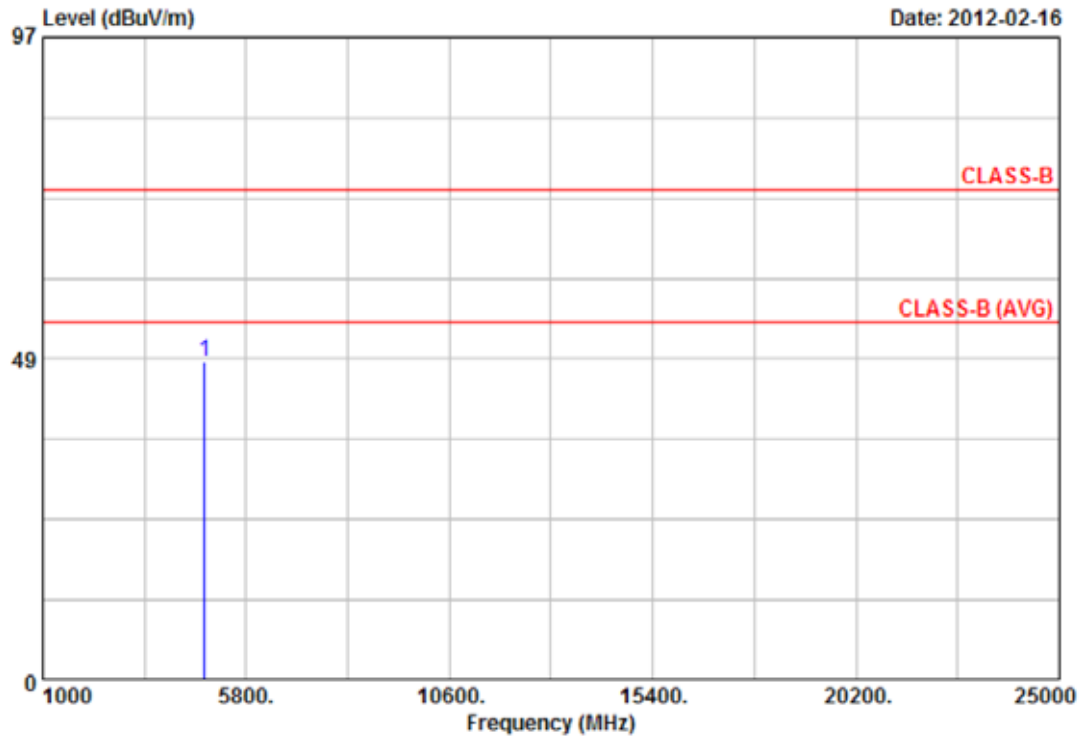


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4825.94	42.57	5.65	48.22	74.00	-25.78	Peak	130	201

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11n HT20, CH1	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

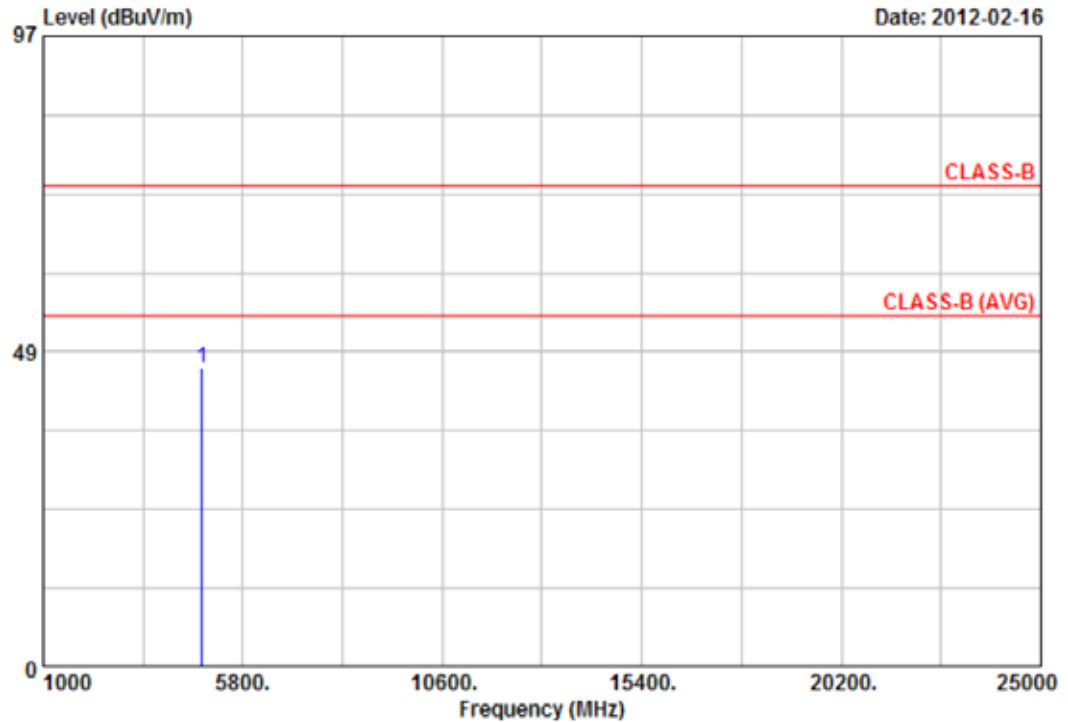


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4826.10	42.04	3.98	46.02	74.00	-27.98	Peak	130	58

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11n HT20, CH6	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

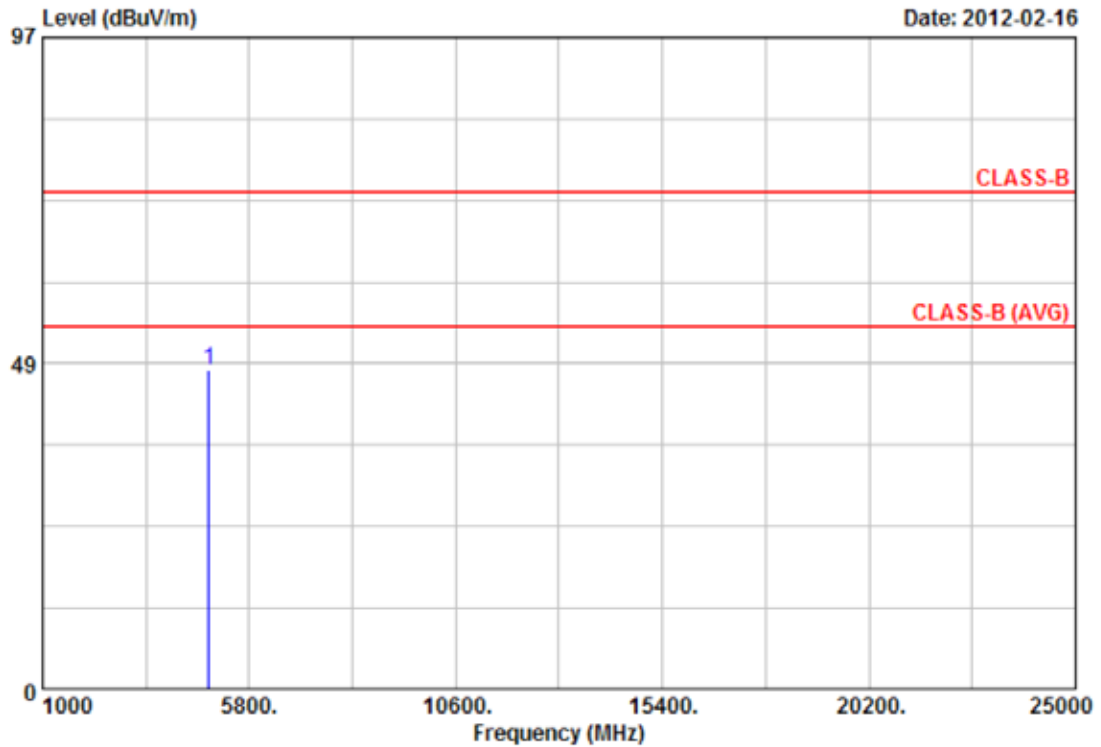


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4872.09	41.12	6.55	47.67	74.00	-26.33	Peak	130	201

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 2	: 802.11n HT20, CH6	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

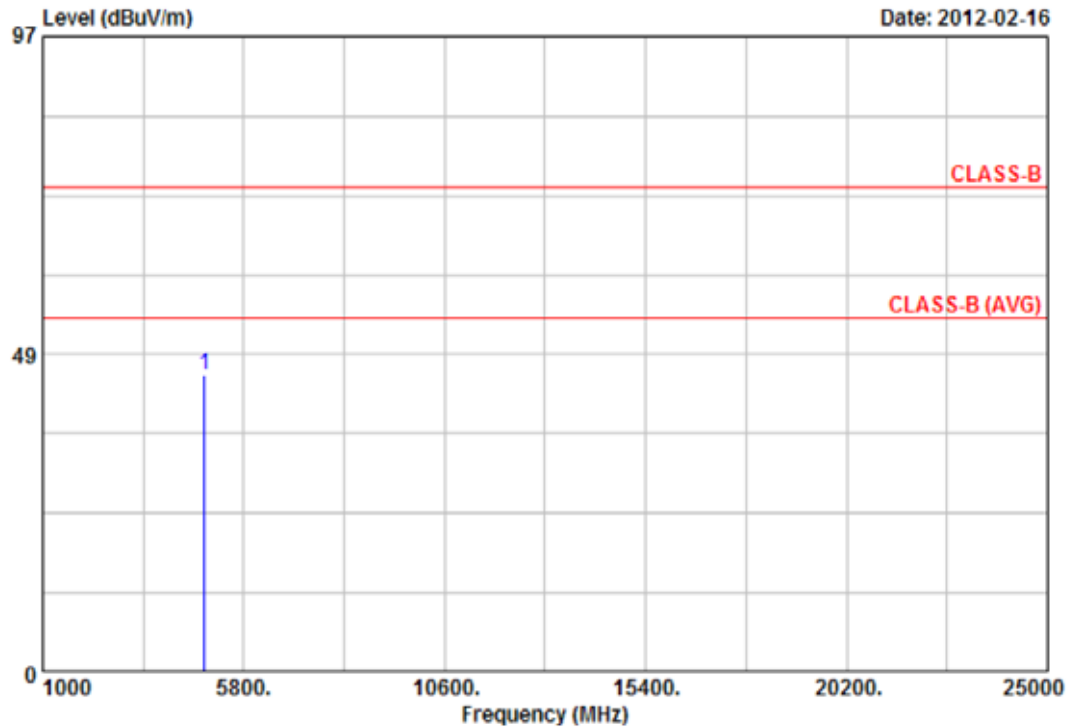


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4872.70	40.66	4.71	45.37	74.00	-28.63	Peak	130	58

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11n HT20, CH11	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

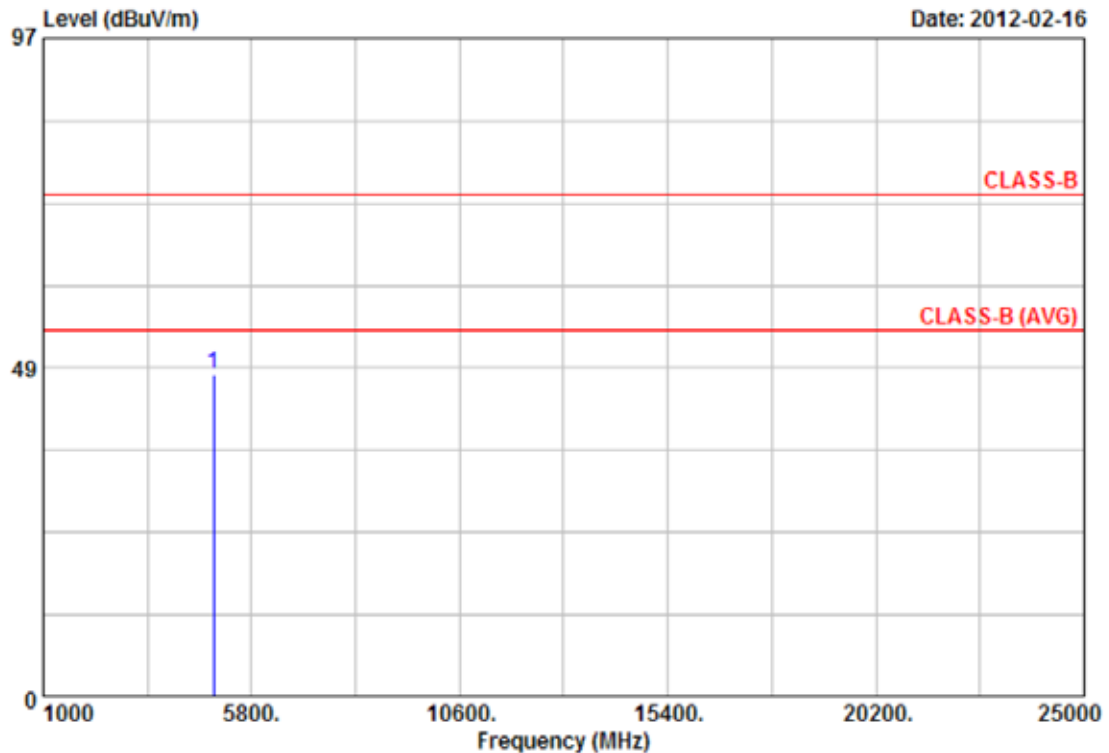


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4925.90	40.39	7.17	47.56	74.00	-26.44	Peak	130	201

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11n HT20, CH11	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

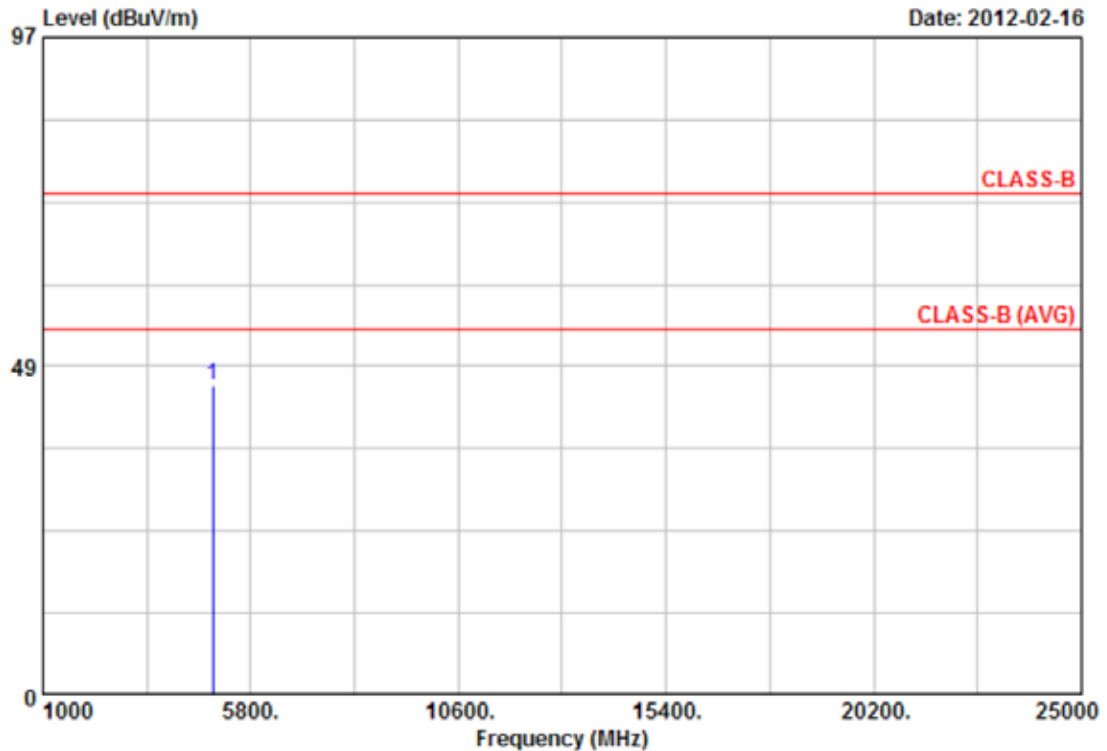


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.53	40.59	5.15	45.74	74.00	-28.26	Peak	130	58

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11n HT40, CH3	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

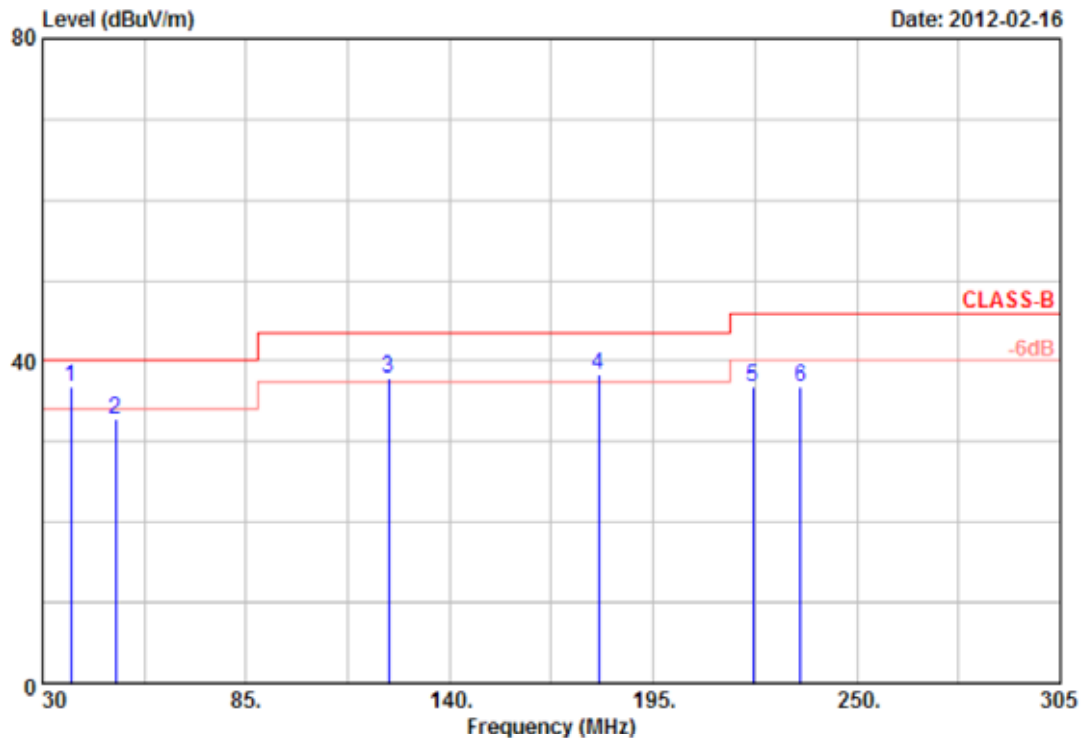


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	37.70	38.56	-1.78	36.78	40.00	-3.22	QP	100	360
2	49.80	39.45	-6.64	32.81	40.00	-7.19	Peak	100	360
3	123.50	42.69	-4.84	37.85	43.50	-5.65	QP	100	360
4	180.15	43.54	-5.15	38.39	43.50	-5.11	QP	100	360
5	221.95	43.18	-6.32	36.86	46.00	-9.14	Peak	100	360
6	234.88	44.57	-7.85	36.72	46.00	-9.28	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11n HT40, CH3	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

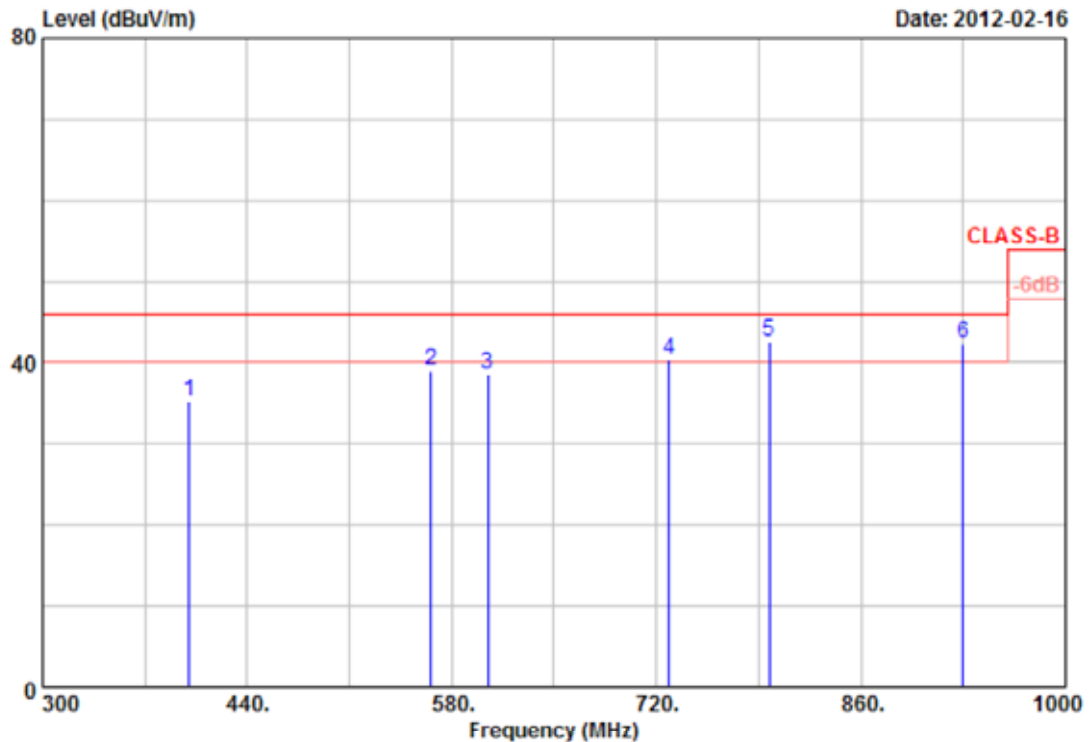


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	400.10	40.57	-5.39	35.18	46.00	-10.82	Peak	100	0
2	566.00	32.17	6.78	38.95	46.00	-7.05	Peak	100	0
3	604.50	35.53	2.96	38.49	46.00	-7.51	Peak	100	0
4	728.40	33.43	6.82	40.25	46.00	-5.75	QP	100	0
5	797.00	36.52	5.94	42.46	46.00	-3.54	QP	100	0
6	930.00	33.70	8.73	42.43	46.00	-3.57	QP	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11n HT40, CH3	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

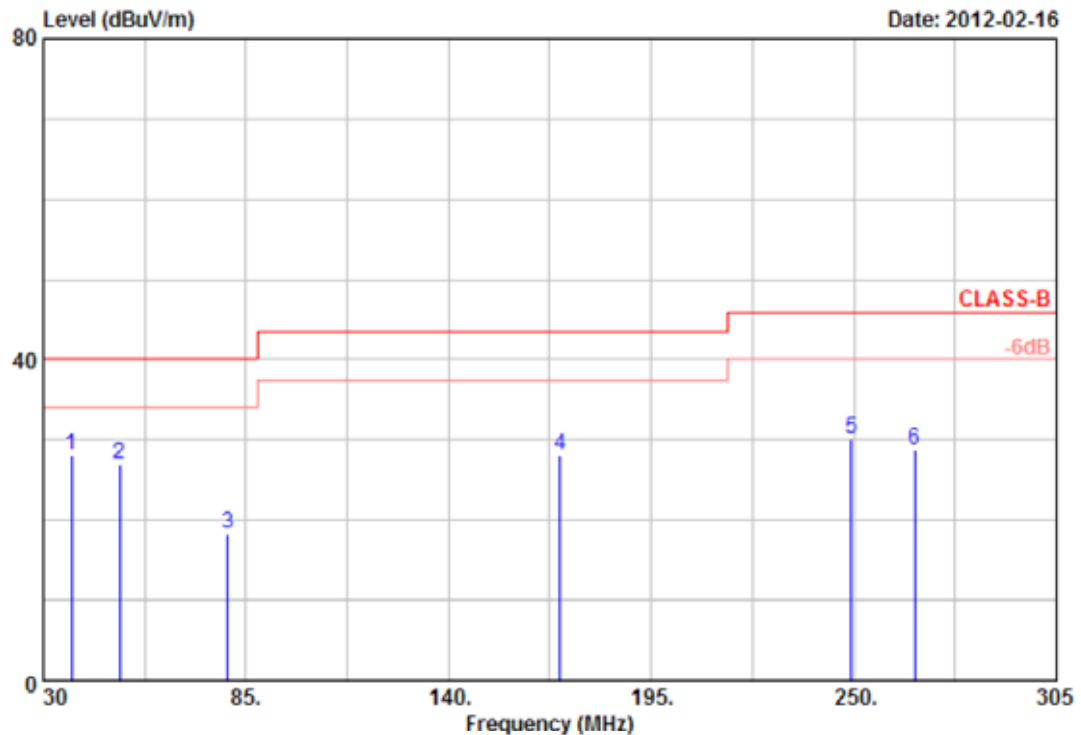


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	37.70	35.19	-7.05	28.14	40.00	-11.86	Peak	100	360
2	50.63	36.36	-9.38	26.98	40.00	-13.02	Peak	100	360
3	80.05	36.87	-18.63	18.24	40.00	-21.76	Peak	100	360
4	170.25	39.41	-11.29	28.12	43.50	-15.38	Peak	100	360
5	249.45	43.54	-13.50	30.04	46.00	-15.96	Peak	100	360
6	266.50	42.69	-13.94	28.75	46.00	-17.25	Peak	100	360

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11n HT40, CH3	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

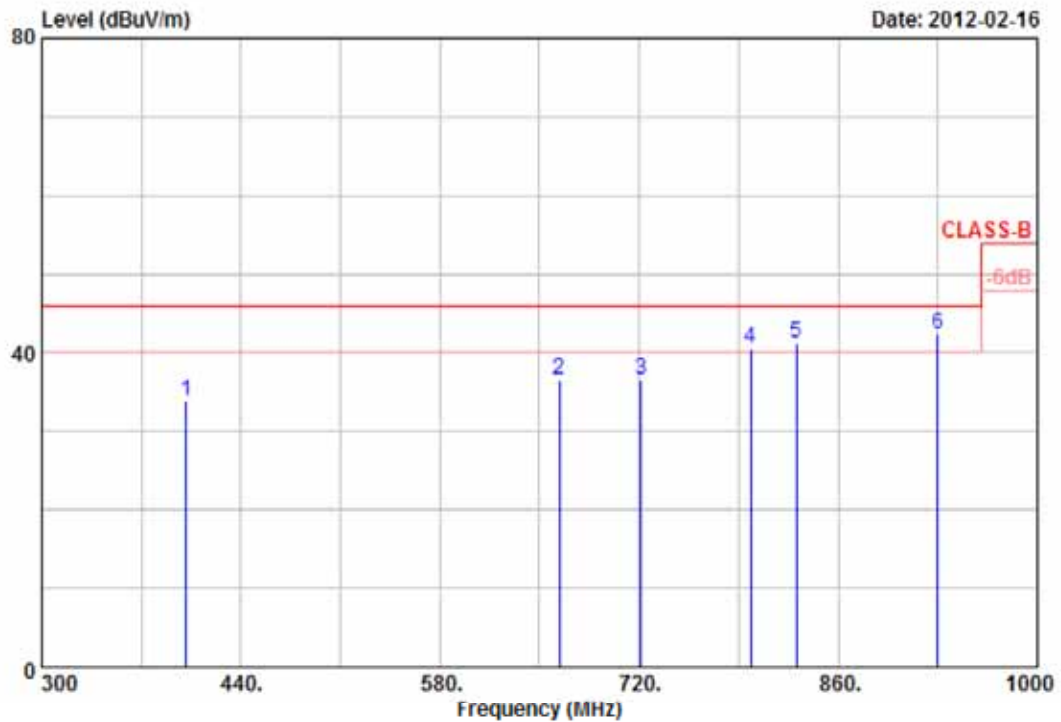


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	401.50	42.79	-9.02	33.77	46.00	-12.23	Peak	100	0
2	664.00	36.76	-0.22	36.54	46.00	-9.46	Peak	100	0
3	721.40	32.59	3.99	36.58	46.00	-9.42	Peak	100	0
4	798.40	34.55	6.07	40.62	46.00	-5.38	QP	100	0
5	830.60	32.66	8.59	41.25	46.00	-4.75	QP	100	0
6	930.00	35.62	6.82	42.44	46.00	-3.56	QP	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11n HT40, CH3	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

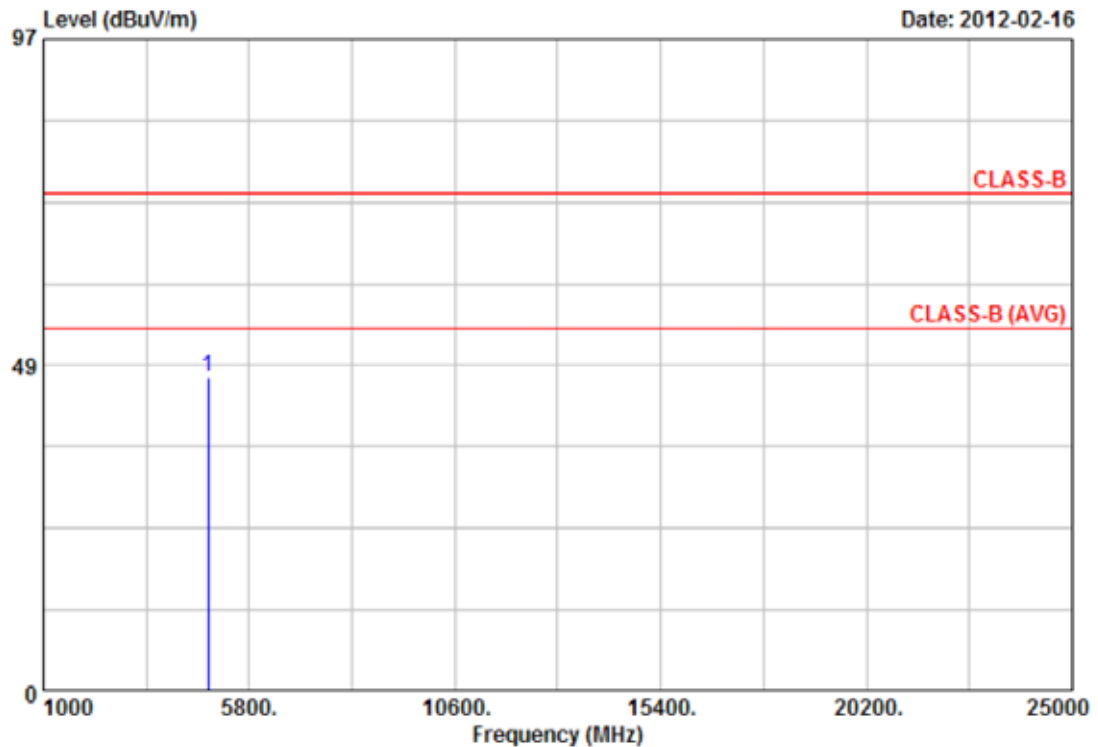


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4846.26	40.63	6.05	46.68	74.00	-27.32	Peak	130	201

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11n HT40, CH3	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

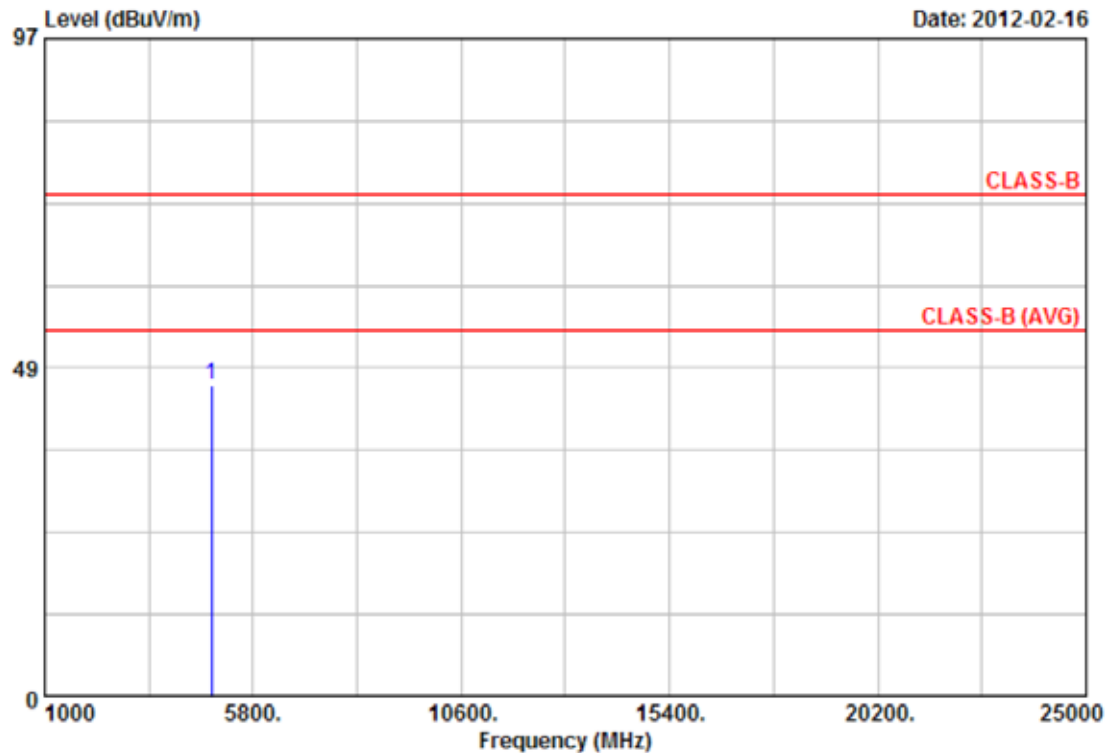


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4844.15	41.80	4.26	46.06	74.00	-27.94	Peak	130	58

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11n HT40, CH6	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

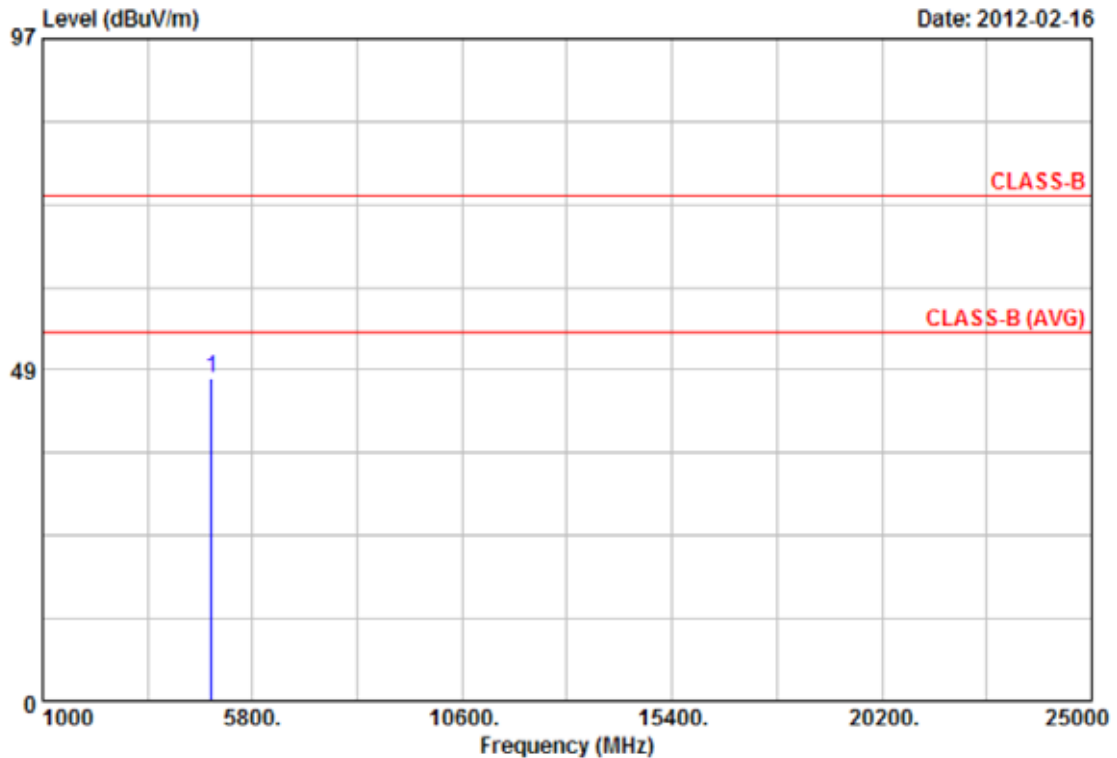


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4871.99	40.85	6.55	47.40	74.00	-26.60	Peak	130	201

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11n HT40, CH6	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

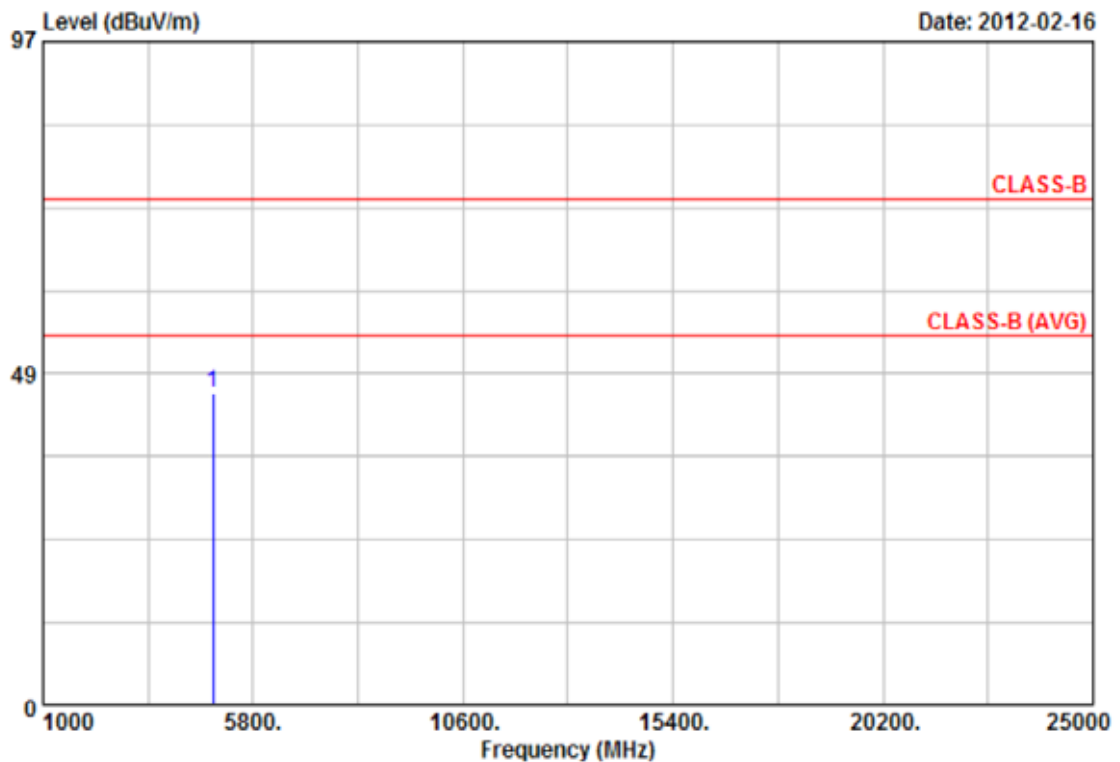


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.95	40.93	4.74	45.67	74.00	-28.33	Peak	130	58

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 1	: 802.11n HT40, CH9	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

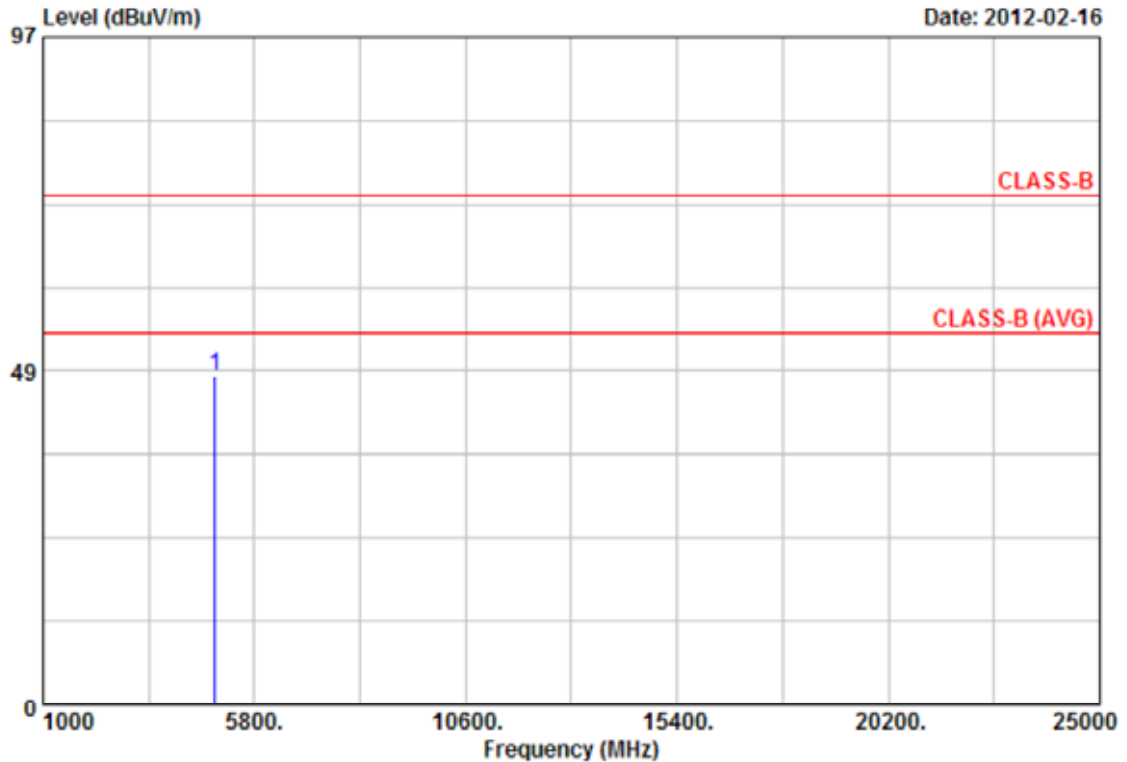


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4904.98	40.60	7.12	47.72	74.00	-26.28	Peak	130	201

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 1	: 802.11n HT40, CH9	Temperature	: 20 °C
Memo	:	Humidity	: 68 %

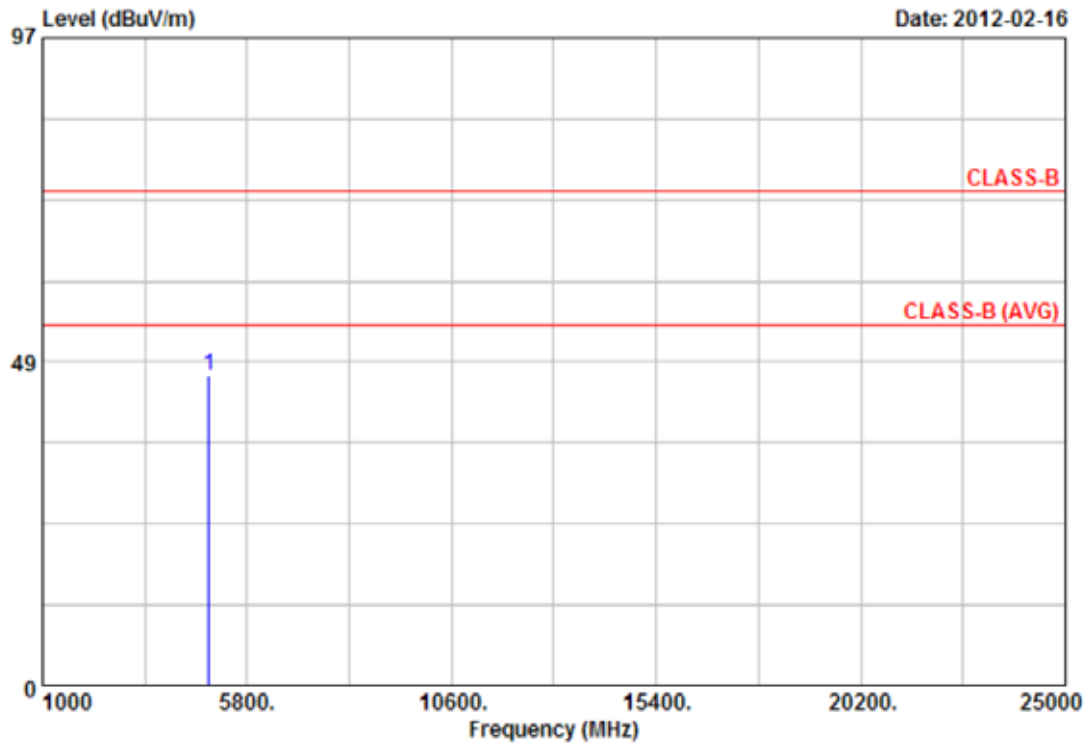

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4904.15	41.36	5.14	46.50	74.00	-27.50	Peak	130	58

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz (detector sample mode) for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.