

RADIATED EMISSION TEST REPORT

Product Name: Dual Technology Outdoor Detector

FCC ID: JE4CAV005

Model Number: WatchOut 315DT

Applicant:

RISCO LTD.
14 HACHOMA ST.
RISHON LET'ZION 75665
ISRAEL

Test Lab:
Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669 USA

Date Receipt: 1/18/2010

Date Tested: 2/2/2010

Tested By: Joe Scoglio

Approved by: Mario de Aranzeta

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

TABLE OF CONTENTS

ATTESTATIONS	3
REPORT SUMMARY	4
TEST ENVIRONMENT.....	4
TEST SETUP SUMMARY.....	4
DUT SPECIFICATION	5
EMC EQUIPMENT LIST	6
TEST PROCEDURE	7
RADIATION INTERFERENCE	8

APPLICANT: RISCO LTD.

FCC ID: JE4CAV005

REPORT #: R\RISCO_JE4\120UT10\120UT10TestReport.doc Page 2 of 9

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

ATTESTATIONS

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025:2005 requirements.



Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669

Authorized Signatory Name:

Mario de Aranzeta C.E.T.
Compliance Engineer/ Lab. Supervisor

Date: February 5, 2010

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

REPORT SUMMARY

Disclaimer	The test results only relate to the item tested.
Applicable Rule(s)	Pt 15.109, Pt 15.107, ANSI C63.4: 2003, 15.245
Related Report	No Related Report

TEST ENVIRONMENT

Test Facility	Timco Engineering, Inc. 849 NW State Road 45 Newberry, FL 32669 USA.
Test Condition in the laboratory	Temperature: 26°C Relative humidity: 50%

TEST SETUP SUMMARY

Test Setup Diagram/ Description	The DUT was placed on the turntable per setup per ANSI C63.4: 2003. A test set up photo is provided for clarification.
Deviation from the standard/procedure	No deviation
Modification of DUT	No modification

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

DUT SPECIFICATION

DUT Description	Dual Technology Outdoor Detector
FCC Identified	FCC ID: JE4CAV005
IC Cert. No.	N/A
Model Number	WatchOut 315DT
Serial Number	N/A
Operating Frequency	10.525 GHz
Test Frequencies	10.525 GHz
DUT Power Source	<input type="checkbox"/> 110-120Vac/50- 60Hz
	<input type="checkbox"/> DC Power 12V
	<input checked="" type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
Type of Equipment	<input checked="" type="checkbox"/> Fixed
	<input type="checkbox"/> Mobile
	<input type="checkbox"/> Portable

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/20/07	3/19/10
3-Meter OATS	TEI	N/A	N/A	Listed 1/11/09	1/10/12
Antenna: Biconnical	Eaton	94455-1	1057	CAL 12/12/09	12/12/11
Antenna: Biconnical	Eaton	94455-1	1096	CAL 10/11/08	10/11/10
Antenna: Biconnical	Electro-Metrics	BIA-25	1171	CAL 7/18/09	7/18/11
Analyzer Blue Tower Quasi-Peak Adapter	HP	85655a	2811A01279	CAL 5/17/09	5/17/11
Analyzer Blue Tower RF Preselector	HP	85685A	2926A00983	CAL 5/17/09	5/17/11
Analyzer Blue Tower Spectrum Analyzer	HP	8566B	2928A04729 2848A18049	CAL 5/17/09	5/17/11
LISN	Electro-Metrics	ANS-25/2	2604	CAL 10/5/08	10/5/10
LISN	Electro-Metrics	EM-7820	2682	CAL 7/23/09	7/23/11
Antenna: Log-Periodic	Eaton	96005	1243	CAL 12/14/09	12/14/11

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

TEST PROCEDURE

(As applicable)

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC. The UUT was transmitting a signal during the testing.

RADIATION INTERFERENCE: The test procedure used was ANSI C63.4-2003 using an Agilent/HP spectrum receiver with a preselector. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz up to 1.0 GHz and 1.0 MHz with a video BW of 3.0 MHz above 1.0 GHz.

FORMULA OF CONVERSION FACTORS: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

$$\begin{aligned} \text{Freq (MHz) METER READING + ACF} &= \text{FS} \\ 33 \quad 20 \text{ dBuV} + 10.36 \text{ dB} &= 30.36 \text{ dBuV/m @ 3m} \end{aligned}$$

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI C63.4-2003 using a 50 μ H LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed. The ambient temperature of in the laboratory was 26 C with a relative humidity of 30%.

ANSI STANDARD C63.4-2003 MEASUREMENT PROCEDURES: The UUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The UUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1 m to 4 m. The antenna was placed in both the horizontal and vertical planes.

The situation was similar for the conducted measurement except that the table did not rotate. The UUT was setup as described in ANSI C63.4-2003 with the UUT 40 cm from the vertical ground wall.

CONVERSION FACTORS AND PROCEDURES ABOVE 40 GHZ: Harmonic mixers were used above 40 GHz a measurement distance of 1 meter is usually used but in some cases if there is nothing to observe then a distance of 0.5 m is used. The antenna gain, mixer correction factor, and distance correction factor are corrected for in the field strength.

APPLICANT: Risco

FCC ID: JE4CAV005

REPORT #: Z:\R\RISCO\120UT10\120UT10TestReport

Page 7 of 9

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

RADIATION INTERFERENCE


RULES PART NUMBER: 15.245, 15.205, and 15.209

REQUIREMENTS:

Fundamental Frequency MHz	Field strength of fundamental dB μ V/m	Field Strength of Harmonics dB μ V/m
902 – 928	114	64
2435 – 2465	114	64
5785 – 5815	114	64
10500 – 10550	128	88
24075 – 24175	128	88

Emissions radiated outside of the specified frequency bands, except for harmonics, to the general radiated emission limits in 15.209.

TEST DATA:

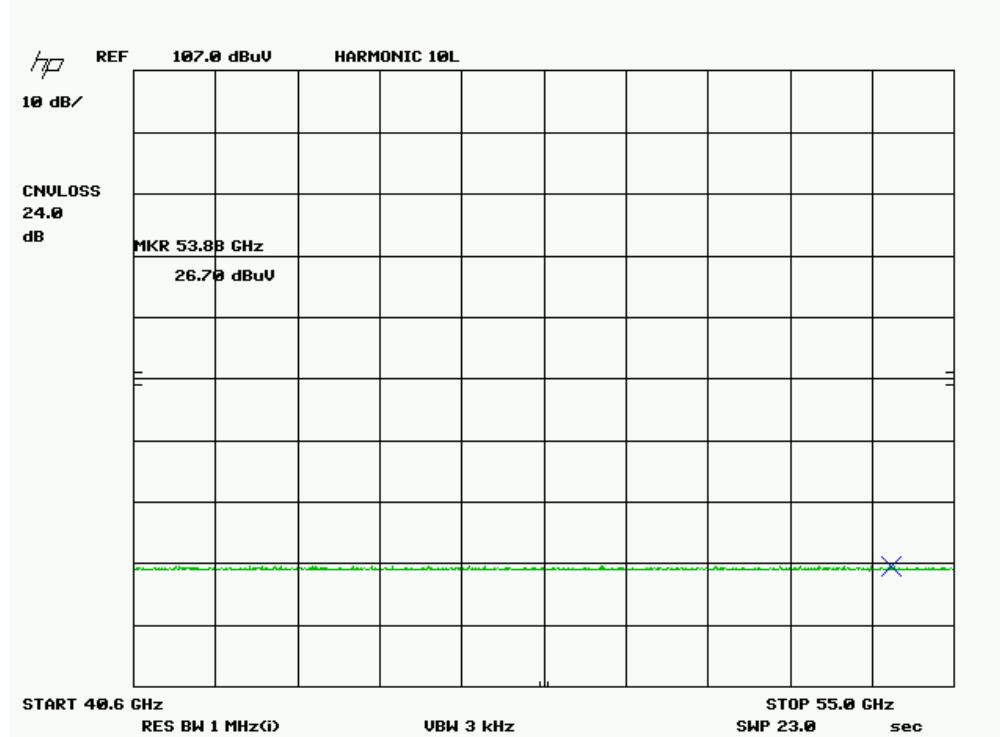

The device under test is a pulse modulated device which we examined in both a normal and then a mode where we de-spread the modulation to a CW carrier. We measured the harmonic of the CW carrier with both peak and average detectors. This was done so a pulse desensitization factor would not need to be applied. No significant emissions were noted at this harmonic in either mode or using either detector. The average plot was included as the limit is expressed as an average value. The peak value again would be a noise floor measurement.

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

At 0.5 meter

Emission Frequency GHz	Meter Reading dB μ V	Ant. Polarity	Conv Loss dB	Correction Factor dB/m	D.C.F. dB	Field Strength dB μ V/m
40	26.7	V	0	38.7	-15.5	49.9
55	26.7	V	-2	41.5	-15.5	50.7

D.C.F. is a distance correction factor to correct the 0.5 meter measurement distance back to the 3 meter FCC limit distance

No significant emissions noted in either V or H polarity.

The conversion loss shown in the table is the difference between the nominal loss in the mixer 24 dB and the actual loss of the mixer at the frequency of interest in the table. This was done because the mixer's conversion loss isn't flat across the band of interest and the Agilent 8566B only allows 1 conversion loss to be input. This nominal value can be seen in the plot.