



COMPLIANCE DOCUMENT
AGENCY CE, IC, FCC, RCM

CHANGING THIS DOCUMENT MAY AFFECT
AGENCY APPROVAL AND/OR TECHNICAL FILE.
SEE GRACO ENGINEERING STD.2.7001. 318-163

NUMBER 130881			
PARTS LIST			
ITEM	PART NO.	QTY	UNIT

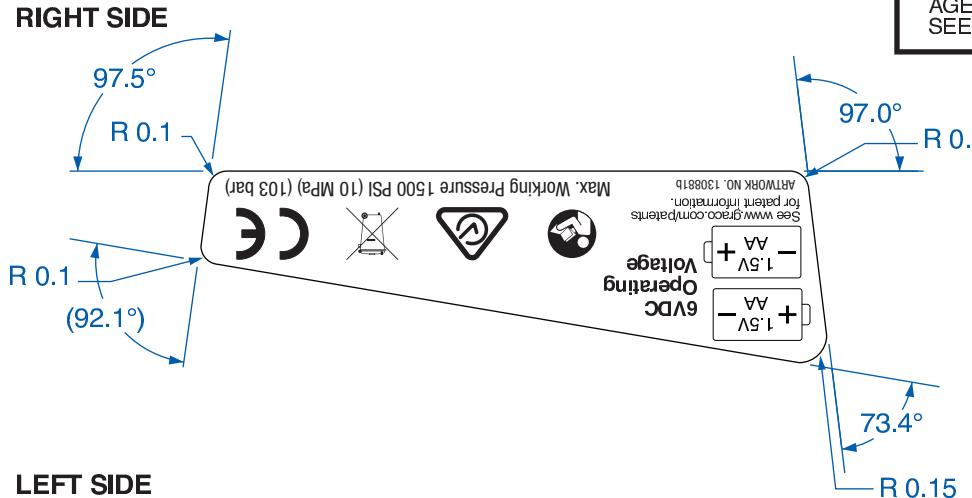

LEFT SIDE

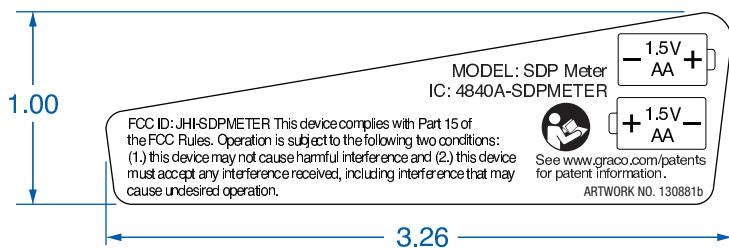

INCH: ASME Y14.5M

NOTES:

MATERIAL: .002" matte silver polyester with .001" clear polyester lamination.

ADHESIVE: Permanent pressure sensitive adhesive

APPLICATION: Die Cast Aluminum

EXPOSURE: Indoor/Outdoor

TEMPERATURE RANGE: 4° C (158° F) Max
-70° C (-15° F) Min

MUST BE ROHS COMPLIANT.

MUST BE CSA CERTIFIED.

COLOR KEY

1 Black

ADOBE ILLUSTRATOR-DWG

				UNLESS OTHERWISE NOTED DIMENSIONS ARE IN MILLIMETERS SILICONE-FREE STD. 4.1208 DIM & TOL STD. 1.0402 & ASME Y14.5M-1994 TOLERANCES: SEE GRACO STANDARDS CENTERLINE VARIANCE STD 1.0406 HOLES STD 1.0407 SHEET METAL STD 4.0100 PLATED & HTTR PARTS STD 1.0409 BURRS & EDGES STD 1.0420 THREADS STD 1.0425 SURFACE ROUGHNESS STD 1.0445	SCALE 1/1	 GRACO	THIS DRAWING SHALL BE USED ONLY AS SPECIFIED BY GRACO. ANY OTHER USE, REPRODUCTION OR DISCLOSURE TO OTHERS WITHOUT WRITTEN PERMISSION IS PROHIBITED.
B	REMOVE WORD "CONTAINS"	Z132630	5/6/19	DECIMALS $\pm .03$ $\pm .01$ $\pm .005$	ANGLES $\pm .005$ $\pm 1/2^\circ$	ENGINEER NAME M.BAUCK	MATERIAL SEE NOTES SPEC. NO.
A	RELEASED L141M	Z130858	4/10/19	FINISH SPEC. NO.			
LTR	DESCRIPTION	ECO	DATE				SIZE A 1 OF 1
	REVISIONS						SHEET NUMBER 130881 SERIES