

# FCC Test Report

**Equipment** : 5GHz 802.11n 3T3R wifi module  
**Brand Name** : SMC  
**Model No.** : SMC-RT359333DB5  
**FCC ID** : JI5-RT359333DB5  
**Standard** : 47 CFR FCC Part 15.407  
**Frequency** : 5150 MHz – 5250 MHz  
5725 MHz – 5850 MHz  
**FCC Classification** : NII  
**Applicant** : SMC Networks Inc  
20 Mason, Irvine, California, United States, CA 92618  
**Manufacturer** : MAINTEK COMPUTER  
233 Jinfeng Rd., Suzhou, Jiangsu, PRC  
**Function** : ☒ Indoor  
**Operate Mode** : Client

The product sample received on May 20, 2016 and completely tested on Jun. 24, 2016. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

  
Kevin Liang / Assistant Manager



## Table of Contents

|          |                                                  |           |
|----------|--------------------------------------------------|-----------|
| <b>1</b> | <b>GENERAL DESCRIPTION .....</b>                 | <b>5</b>  |
| 1.1      | Information.....                                 | 5         |
| 1.2      | Testing Applied Standards .....                  | 8         |
| 1.3      | Testing Location Information .....               | 8         |
| 1.4      | Measurement Uncertainty .....                    | 9         |
| <b>2</b> | <b>TEST CONFIGURATION OF EUT.....</b>            | <b>10</b> |
| 2.1      | The Worst Case Modulation Configuration .....    | 10        |
| 2.2      | Test Channel Mode .....                          | 11        |
| 2.3      | The Worst Case Measurement Configuration.....    | 12        |
| 2.4      | Accessories and Support Equipment .....          | 13        |
| 2.5      | Test Setup Diagram .....                         | 13        |
| <b>3</b> | <b>TRANSMITTER TEST RESULT .....</b>             | <b>14</b> |
| 3.1      | AC Power-line Conducted Emissions .....          | 14        |
| 3.2      | Emission Bandwidth .....                         | 16        |
| 3.3      | Maximum Conducted Output Power .....             | 17        |
| 3.4      | Peak Power Spectral Density.....                 | 20        |
| 3.5      | Unwanted Emissions.....                          | 23        |
| 3.6      | Frequency Stability.....                         | 27        |
| <b>4</b> | <b>TEST EQUIPMENT AND CALIBRATION DATA .....</b> | <b>29</b> |

### Appendix I. Test Result of AC Power-line Conducted Emissions

#### Appendix A. Test Result of Emission Bandwidth

#### Appendix B. Test Result of Maximum Conducted Output Power

#### Appendix C. Test Result of Power Spectral Density

#### Appendix D. Unwanted Emissions

#### Appendix E. Frequency Stability

#### Appendix F. Test Photos

#### Appendix G. Photographs of EUT

## Summary of Test Result

| Conformance Test Specifications |                  |                                   |          |
|---------------------------------|------------------|-----------------------------------|----------|
| Report Clause                   | Ref. Std. Clause | Description                       | Result   |
| 1.1.2                           | 15.203           | Antenna Requirement               | Complied |
| 3.1                             | 15.207           | AC Power-line Conducted Emissions | Complied |
| 3.2                             | 15.407(a)        | Emission Bandwidth                | Complied |
| 3.3                             | 15.407(a)        | Maximum Conducted Output Power    | Complied |
| 3.4                             | 15.407(a)        | Peak Power Spectral Density       | Complied |
| 3.5                             | 15.407(b)        | Unwanted Emissions                | Complied |
| 3.6                             | 15.407(g)        | Frequency Stability               | Complied |



SPORTON INTERNATIONAL INC.  
TEL : 886-3-327-3456  
FAX : 886-3-327-0973

# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

| Band | Mode | BWch (MHz) | Nss-Min   | Nant | Worst Data Rate / MCS |
|------|------|------------|-----------|------|-----------------------|
| All  | 11a  | 20         | 1         | 1    | 6 Mbps                |
| All  | HT20 | 20         | 1,(M0-23) | 3    | MCS 0                 |
| All  | HT40 | 40         | 1,(M0-23) | 3    | MCS 0                 |

**Note:**

- ♦ 5.2G is the 5.2GHz Band (5.15-5.25GHz).
- ♦ 5.8G is the 5.8GHz Band (5.725-5.850GHz).
- ♦ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ BWch is the nominal channel bandwidth.
- ♦ Nss-Min is the minimum number of spatial streams.
- ♦ Nant is the number of outputs. e.g., 2(2,3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.

**1.1.2 Antenna Information**

| Antenna Category                    |                                                                                                                                                                                                                                                                                                                   |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | Integral antenna (antenna permanently attached)                                                                                                                                                                                                                                                                   |
| <input checked="" type="checkbox"/> | Temporary RF connector provided                                                                                                                                                                                                                                                                                   |
| <input type="checkbox"/>            | No temporary RF connector provided<br>Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path. |
| <input type="checkbox"/>            | External antenna (dedicated antennas)                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/>            | Single power level with corresponding antenna(s).                                                                                                                                                                                                                                                                 |
| <input type="checkbox"/>            | Multiple power level and corresponding antenna(s).                                                                                                                                                                                                                                                                |
| <input type="checkbox"/>            | RF connector provided                                                                                                                                                                                                                                                                                             |
| <input type="checkbox"/>            | Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type...)                                                                                                                                                                                                                                       |
| <input type="checkbox"/>            | Standard antenna connector. (e.g., SMA, N, BNC, and TNC type...)                                                                                                                                                                                                                                                  |

| Antenna General Information |           |           |            |
|-----------------------------|-----------|-----------|------------|
| No.                         | Ant. Cat. | Ant. Type | Gain (dBi) |
| 1                           | Integral  | PIFA      | 1.9        |

**1.1.3 Type of EUT**

| Identify EUT                        |                                                                                                                                   |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| EUT Serial Number                   | N/A                                                                                                                               |
| Presentation of Equipment           | <input checked="" type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype     |
| Type of EUT                         |                                                                                                                                   |
| <input checked="" type="checkbox"/> | Stand-alone                                                                                                                       |
| <input type="checkbox"/>            | Combined (EUT where the radio part is fully integrated within another device)<br>Combined Equipment - Brand Name / Model No.: ... |
| <input type="checkbox"/>            | Plug-in radio (EUT intended for a variety of host systems)<br>Host System - Brand Name / Model No.: ...                           |
| <input type="checkbox"/>            | Other:                                                                                                                            |

**1.1.4 Mode Test Duty Cycle**

| Operated Mode for Worst Duty Cycle                                |                                          |
|-------------------------------------------------------------------|------------------------------------------|
| Test Signal Duty Cycle (x)                                        | Power Duty Factor<br>[dB] – (10 log 1/x) |
| <input checked="" type="checkbox"/> 100.00% - IEEE 802.11a (HT20) | 0                                        |
| <input checked="" type="checkbox"/> 100.00% - IEEE 802.11n (HT20) | 0                                        |
| <input checked="" type="checkbox"/> 100.00% - IEEE 802.11n (HT40) | 0                                        |

**1.1.5 EUT Operational Condition**

|                          |                                              |                                                      |                                  |
|--------------------------|----------------------------------------------|------------------------------------------------------|----------------------------------|
| <b>Supply Voltage</b>    | <input type="checkbox"/> AC mains            | <input checked="" type="checkbox"/> DC               |                                  |
| <b>Type of DC Source</b> | <input type="checkbox"/> External AC Adapter | <input checked="" type="checkbox"/> From Host System | <input type="checkbox"/> Battery |

## 1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 789033 D02 v01r02
- ♦ FCC-16-24-UNII
- ♦ FCC KDB 662911 D01 v02r01

## 1.3 Testing Location Information

| Testing Location                    |               |                                                                                       |                  |            |
|-------------------------------------|---------------|---------------------------------------------------------------------------------------|------------------|------------|
| <input checked="" type="checkbox"/> | <b>HWA YA</b> | <b>ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.</b> |                  |            |
|                                     |               | <b>TEL : 886-3-327-3456 FAX : 886-3-318-0055</b>                                      |                  |            |
| Test Condition                      | Test Site No. | Test Engineer                                                                         | Test Environment | Test Date  |
| AC Conduction                       | CO04-HY       | Rya                                                                                   | 23.5°C / 65%     | 16/06/2016 |
| RF Conducted                        | TH01-HY       | Lisa                                                                                  | 23.5°C / 65%     | 30/05/2016 |
| Radiated                            | 03CH03-HY     | Jeff                                                                                  | 21.2°C / 60%     | 30/05/2016 |

Test site registered number [ 553509 ] with FCC.



## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

| Measurement Uncertainty            |               |             |
|------------------------------------|---------------|-------------|
| Test Item                          |               | Uncertainty |
| AC power-line conducted emissions  |               | ±2.26 dB    |
| Emission bandwidth, 26dB bandwidth |               | ±1.42 %     |
| RF output power, conducted         |               | ±0.63 dB    |
| Power density, conducted           |               | ±0.81 dB    |
| Unwanted emissions, conducted      | 9 – 150 kHz   | ±0.38 dB    |
|                                    | 0.15 – 30 MHz | ±0.42 dB    |
|                                    | 30 – 1000 MHz | ±0.51 dB    |
|                                    | 1 – 18 GHz    | ±0.67 dB    |
|                                    | 18 – 40 GHz   | ±0.83 dB    |
|                                    | 40 – 200 GHz  | N/A         |
| All emissions, radiated            | 9 – 150 kHz   | ±2.49 dB    |
|                                    | 0.15 – 30 MHz | ±2.28 dB    |
|                                    | 30 – 1000 MHz | ±2.56 dB    |
|                                    | 1 – 18 GHz    | ±3.59 dB    |
|                                    | 18 – 40 GHz   | ±3.82 dB    |
|                                    | 40 – 200 GHz  | N/A         |
| Temperature                        |               | ±0.8 °C     |
| Humidity                           |               | ±3 %        |
| DC and low frequency voltages      |               | ±3 %        |
| Time                               |               | ±1.42 %     |
| Duty Cycle                         |               | ±1.42 %     |

## 2 Test Configuration of EUT

### 2.1 The Worst Case Modulation Configuration

| Worst Modulation Used for Conformance Testing |                              |                 |                       |
|-----------------------------------------------|------------------------------|-----------------|-----------------------|
| Modulation Mode                               | Transmit Chains ( $N_{TX}$ ) | Data Rate / MCS | Worst Data Rate / MCS |
| 11a                                           | 1                            | 6-54Mbps        | 6 Mbps                |
| HT20                                          | 3                            | MCS 0-23        | MCS 0                 |
| HT40                                          | 3                            | MCS 0-23        | MCS 0                 |

## 2.2 Test Channel Mode

|                       |                    |
|-----------------------|--------------------|
| Test Software Version | QA_RT3593_V1.0.4.0 |
|-----------------------|--------------------|

| Band | Mode | BWch (MHz) | Ch. (MHz) | Power Setting |
|------|------|------------|-----------|---------------|
| 5.2G | 11a  | 20         | 5180      | 0E            |
| 5.2G | 11a  | 20         | 5200      | 0D            |
| 5.2G | 11a  | 20         | 5240      | 14            |
| 5.2G | HT20 | 20         | 5180      | 09,04,0F      |
| 5.2G | HT20 | 20         | 5200      | 06,03,09      |
| 5.2G | HT20 | 20         | 5240      | 04,04,09      |
| 5.2G | HT40 | 40         | 5190      | 08,04,0D      |
| 5.2G | HT40 | 40         | 5230      | 08,07,0C      |

| Band | Mode | BWch (MHz) | Ch. (MHz) | Power Setting |
|------|------|------------|-----------|---------------|
| 5.8G | 11a  | 20         | 5745      | 11            |
| 5.8G | 11a  | 20         | 5785      | 13            |
| 5.8G | 11a  | 20         | 5825      | 15            |
| 5.8G | HT20 | 20         | 5745      | 01,0A,06      |
| 5.8G | HT20 | 20         | 5785      | 01,0A,05      |
| 5.8G | HT20 | 20         | 5825      | 04,0E,07      |
| 5.8G | HT40 | 40         | 5755      | 03,0C,07      |
| 5.8G | HT40 | 40         | 5795      | 03,0C,07      |

### Abbreviation Explanation

| Band | Mode  | BWch (MHz) | Nss-Min  | Nant | Ch. (MHz) | Range | Test Cond. | Abbreviation                          |
|------|-------|------------|----------|------|-----------|-------|------------|---------------------------------------|
| 5.2G | VHT40 | 40         | 1,(M0-9) | 2    | 5190      | L     | TN,VN      | 5.2G;VHT40;40;1,(M0-9);2;5190;L;TN,VN |
| 5.2G | VHT80 | 80         | 1,(M0-9) | 2    | 5210      | S     | TN,VN      | 5.2G;VHT80;80;1,(M0-9);2;5210;S;TN,VN |

Note:

- ♦ Test range channel consist of L (Low Ch.), M (Middle Ch.), H (High Ch.), S (Single Ch. or Intra- band Ch.) and C (Inter-band Ch.).

## 2.3 The Worst Case Measurement Configuration

| The Worst Case Mode for Following Conformance Tests |                                                                                         |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------|
| <b>Tests Item</b>                                   | AC power-line conducted emissions                                                       |
| <b>Condition</b>                                    | AC power-line conducted measurement for line and neutral<br>Test Voltage: 120Vac / 60Hz |
| <b>Operating Mode</b>                               | Operating Mode Description                                                              |
| 1                                                   | Transmit Mode                                                                           |

| The Worst Case Mode for Following Conformance Tests |                                                                                                      |
|-----------------------------------------------------|------------------------------------------------------------------------------------------------------|
| <b>Tests Item</b>                                   | Emission Bandwidth, Maximum Conducted Output Power, Peak Power Spectral Density, Frequency Stability |
| <b>Test Condition</b>                               | Conducted measurement at transmit chains                                                             |


| The Worst Case Mode for Following Conformance Tests |                                                                                                                                                                                                                                                                              |
|-----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tests Item</b>                                   | Transmitter Bandedge Emissions , Transmitter Unwanted Emissions                                                                                                                                                                                                              |
| <b>Test Condition</b>                               | Conducted measurement<br>Radiated measurement<br>If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type. |
| <b>User Position</b>                                | <input checked="" type="checkbox"/> EUT will be placed in fixed position.                                                                                                                                                                                                    |
|                                                     | <input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions.                                                                                                                                                                             |
|                                                     | <input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions.                                                                                                                                                      |
| <b>Operating Mode &lt; 1GHz</b>                     | <input checked="" type="checkbox"/> 1. Transmit Mode                                                                                                                                                                                                                         |
| <b>Orthogonal Planes of EUT</b>                     | <b>X Plane</b>                                                                                                                                                                                                                                                               |
|                                                     |                                                                                                                                                                                          |

## 2.4 Accessories and Support Equipment

### Support Local

| No. | Equipment        | Brand | Model      | FCC ID | Description |
|-----|------------------|-------|------------|--------|-------------|
| 1   | Notebook         | DELL  | E5510      | R33002 | -           |
| 2   | AC Adapter of NB | DELL  | LA65NS2-01 | DoC    | AC 100-240V |

## 2.5 Test Setup Diagram

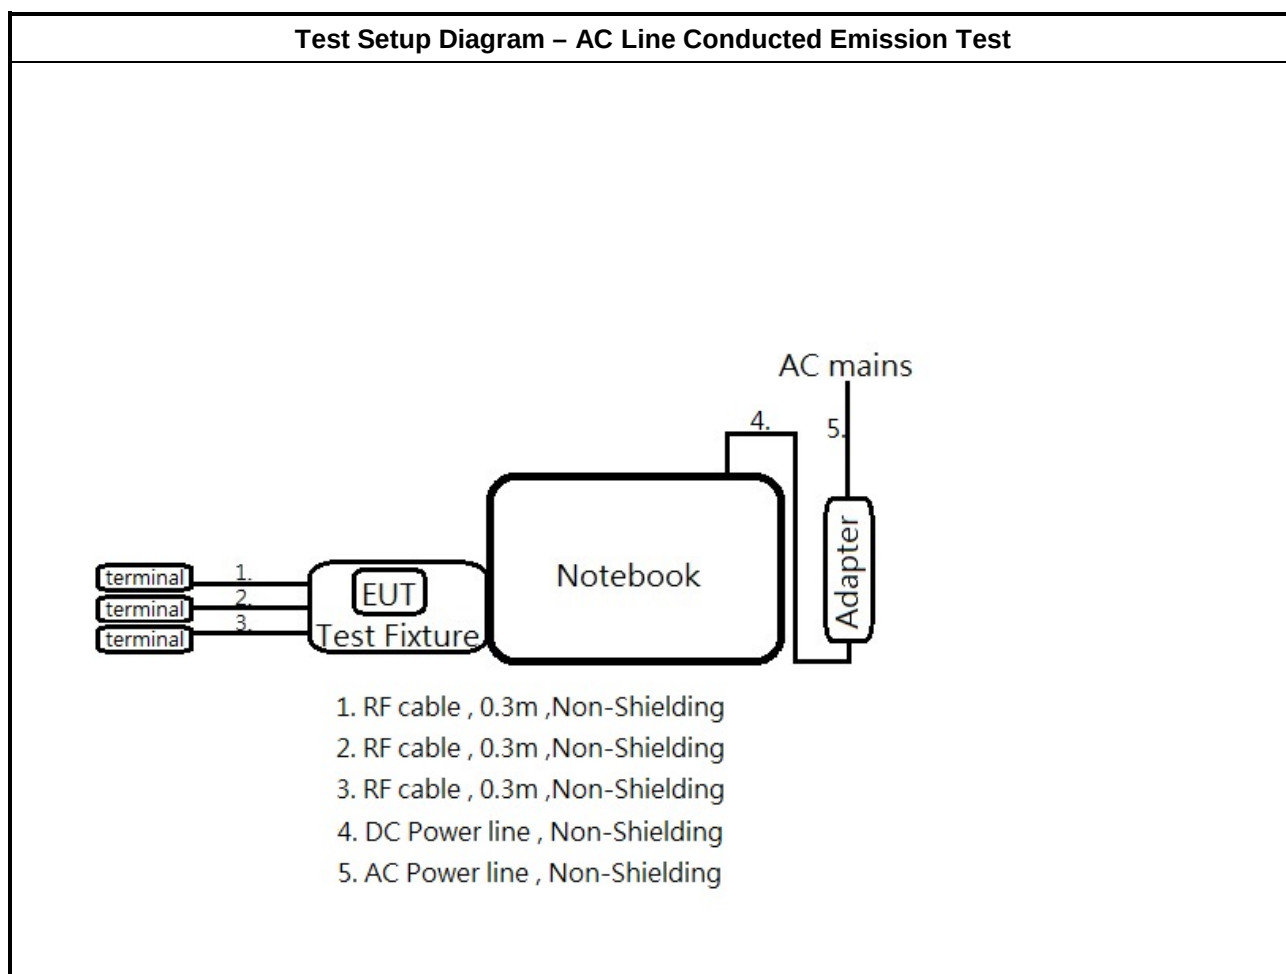

### 3 Transmitter Test Result

### 3.1 AC Power-line Conducted Emissions

### 3.1.1 AC Power-line Conducted Emissions Limit

| AC Power-line Conducted Emissions Limit |            |           |
|-----------------------------------------|------------|-----------|
| Frequency Emission (MHz)                | Quasi-Peak | Average   |
| 0.15-0.5                                | 66 - 56 *  | 56 - 46 * |
| 0.5-5                                   | 56         | 46        |
| 5-30                                    | 60         | 50        |

Note 1: \* Decreases with the logarithm of the frequency.


### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.1.3 Test Procedures

| Test Method                                                                                                      |
|------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions. |

### 3.1.4 Test Setup

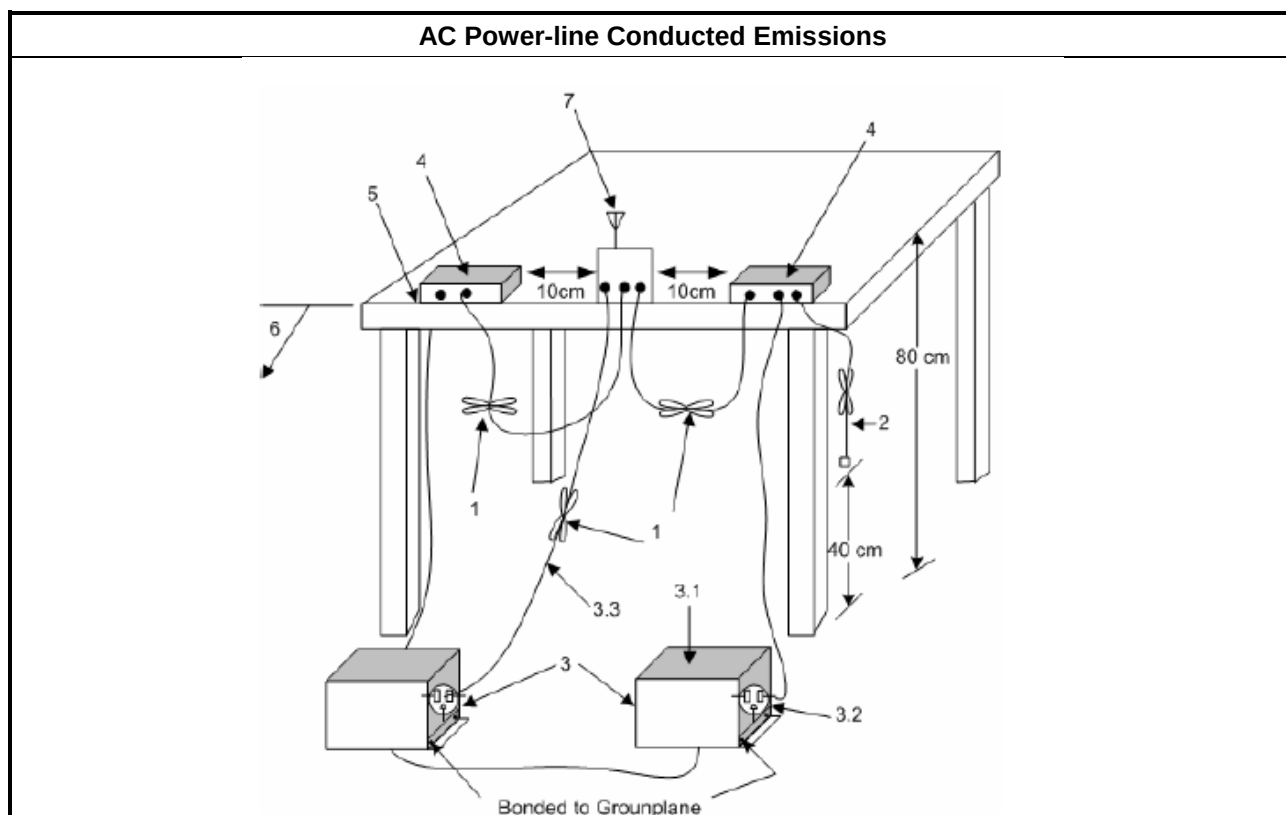



### **3.1.5 Test Result of AC Power-line Conducted Emissions**

Refer as Appendix I

## 3.2 Emission Bandwidth

### 3.2.1 Emission Bandwidth Limit

| Emission Bandwidth Limit            |                                                                                                                                                                             |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>UNII Devices</b>                 |                                                                                                                                                                             |
| <input checked="" type="checkbox"/> | For the 5.15-5.25 GHz band, N/A                                                                                                                                             |
| <input type="checkbox"/>            | For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.  |
| <input type="checkbox"/>            | For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. |
| <input checked="" type="checkbox"/> | For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.                                                                                                         |


### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.2.3 Test Procedures

| Test Method                                                                                                                    |                                                                             |
|--------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>For the emission bandwidth shall be measured using one of the options below:</li> </ul> |                                                                             |
| <input checked="" type="checkbox"/>                                                                                            | Refer as FCC KDB 789033, clause C for EBW and clause D for OBW measurement. |
| <input type="checkbox"/>                                                                                                       | Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.          |

### 3.2.4 Test Setup

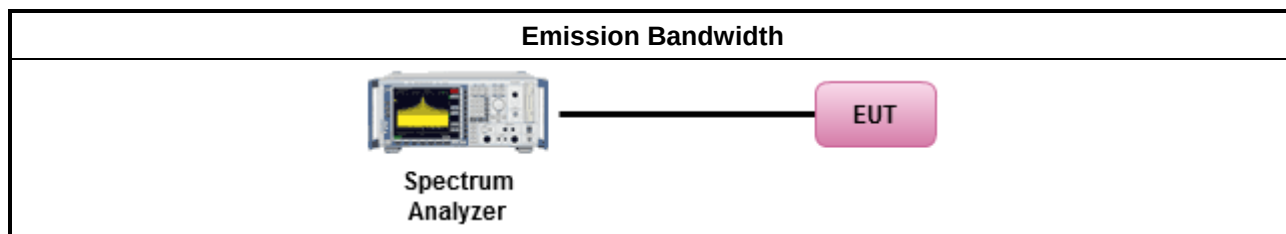

### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix A



### 3.3 Maximum Conducted Output Power

#### 3.3.1 Maximum Conducted Output Power Limit

| Maximum Conducted Output Power Limit                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>UNII Devices</b>                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                |
| <ul style="list-style-type: none"> <li>For the 5.15-5.25 GHz band:</li> </ul>                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                                                                                                                                                                                                                              | <ul style="list-style-type: none"> <li>Outdoor AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math>. e.i.r.p. at any elevation angle above 30 degrees <math>\leq 125</math>mW [21dBm]</li> </ul> |
|                                                                                                                                                                                                                                                                                                                                                              | <ul style="list-style-type: none"> <li>Indoor AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math></li> </ul>                                                                                    |
|                                                                                                                                                                                                                                                                                                                                                              | <ul style="list-style-type: none"> <li>Point-to-point AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 23</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 23)</math>.</li> </ul>                                                                         |
|                                                                                                                                                                                                                                                                                                                                                              | <ul style="list-style-type: none"> <li>Mobile or Portable Client: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 250 mW. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 24 - (G_{TX} - 6)</math>.</li> </ul>                                                                |
| <ul style="list-style-type: none"> <li>For the 5.25-5.35 GHz band, the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 250 mW or <math>11 \text{ dBm} + 10 \log B</math>, where B is the 26 dB emission bandwidth in MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 24 - (G_{TX} - 6)</math>.</li> </ul>  |                                                                                                                                                                                                                                                                                                                                |
| <ul style="list-style-type: none"> <li>For the 5.47-5.725 GHz band, the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 250 mW or <math>11 \text{ dBm} + 10 \log B</math>, where B is the 26 dB emission bandwidth in MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 24 - (G_{TX} - 6)</math>.</li> </ul> |                                                                                                                                                                                                                                                                                                                                |
| <ul style="list-style-type: none"> <li>For the 5.725-5.85 GHz band:</li> </ul>                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                                                                                                                                                                                                                              | <ul style="list-style-type: none"> <li>Point-to-multipoint systems (P2M): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math>.</li> </ul>                                                           |
|                                                                                                                                                                                                                                                                                                                                                              | <ul style="list-style-type: none"> <li>Point-to-point systems (P2P): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W.</li> </ul>                                                                                                                                                  |
| $P_{Out}$ = maximum conducted output power in dBm,<br>$G_{TX}$ = the maximum transmitting antenna directional gain in dBi.                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                |


### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

| Test Method                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>Maximum Conducted Output Power</li> </ul> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                                                                  | [duty cycle $\geq 98\%$ or external video / power trigger]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <input checked="" type="checkbox"/>                                              | Refer as FCC KDB 789033, clause E Method SA-1 (spectral trace averaging).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <input type="checkbox"/>                                                         | Refer as FCC KDB 789033, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                                                                                  | duty cycle $< 98\%$ and average over on/off periods with duty factor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <input type="checkbox"/>                                                         | Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <input type="checkbox"/>                                                         | Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                                                                                  | Wideband RF power meter and average over on/off periods with duty factor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <input type="checkbox"/>                                                         | Refer as FCC KDB 789033, clause E Method PM (using an RF average power meter).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <ul style="list-style-type: none"> <li>For conducted measurement.</li> </ul>     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                                                                  | <ul style="list-style-type: none"> <li>If the EUT supports multiple transmit chains using options given below:<br/>Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li> <li>If multiple transmit chains, EIRP calculation could be following as methods:<br/> <math display="block">P_{\text{total}} = P_1 + P_2 + \dots + P_n</math> (calculated in linear unit [mW] and transfer to log unit [dBm])<br/> <math display="block">\text{EIRP}_{\text{total}} = P_{\text{total}} + \text{DG}</math> </li> </ul> |

### 3.3.4 Test Setup

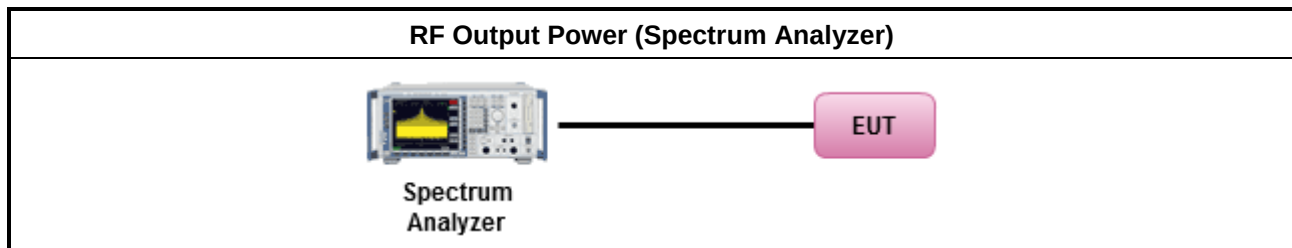


### 3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix B

### 3.3.6 Test Result of Maximum Peak Conducted Output Power(for reference)

#### Test Setup

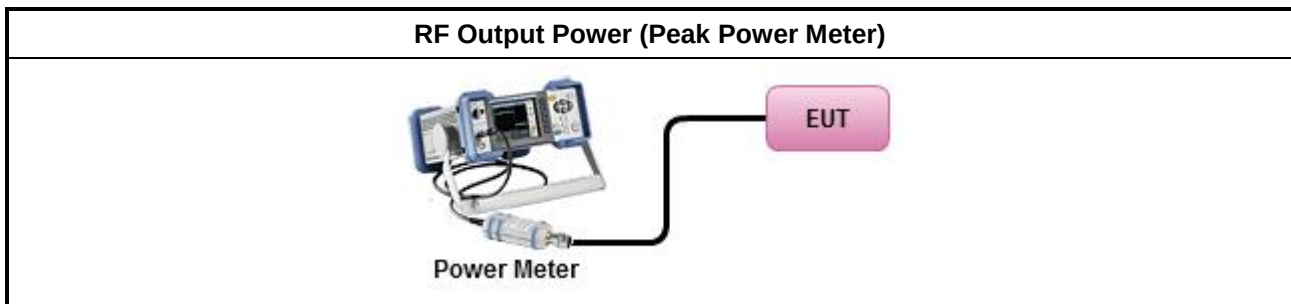

Refer as Appendix B.2

### 3.4 Peak Power Spectral Density

#### 3.4.1 Peak Power Spectral Density Limit

| Peak Power Spectral Density Limit                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>UNII Devices</b>                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                             |
| <ul style="list-style-type: none"> <li>For the 5.15-5.25 GHz band:</li> </ul>                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                             |
|                                                                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 6)</math>.</li> </ul>            |
|                                                                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 6)</math>.</li> </ul>             |
|                                                                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If <math>G_{TX} &gt; 23</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 23)</math>.</li> </ul>   |
|                                                                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>Mobile or Portable Client: the peak power spectral density (PPSD) <math>\leq 11</math> dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 11 - (G_{TX} - 6)</math>.</li> </ul>            |
| <ul style="list-style-type: none"> <li>For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) <math>\leq 11</math> dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 11 - (G_{TX} - 6)</math>.</li> </ul>                                                                             |                                                                                                                                                                                                                                             |
| <ul style="list-style-type: none"> <li>For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) <math>\leq 11</math> dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 11 - (G_{TX} - 6)</math>.</li> </ul>                                                                            |                                                                                                                                                                                                                                             |
| <ul style="list-style-type: none"> <li>For the 5.725-5.85 GHz band:</li> </ul>                                                                                                                                                                                                                                |                                                                                                                                                                                                                                             |
|                                                                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 30 - (G_{TX} - 6)</math>.</li> </ul> |
|                                                                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>Point-to-point systems (P2P): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz.</li> </ul>                                                                                     |
| <p><b>PPSD</b> = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz<br/> <b><math>G_{TX}</math></b> = the maximum transmitting antenna directional gain in dBi.</p> |                                                                                                                                                                                                                                             |


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.4.3 Test Procedures

| Test Method                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <ul style="list-style-type: none"> <li>Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:</li> </ul>                                                                                                                                                                                                                                                                                                                            |  |
| <input type="checkbox"/> Refer as FCC KDB 789033, F5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  |
| [duty cycle ≥ 98% or external video / power trigger]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |
| <input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause E Method SA-1 (spectral trace averaging).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |  |
| <input type="checkbox"/> Refer as FCC KDB 789033, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |
| duty cycle < 98% and average over on/off periods with duty factor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |
| <input type="checkbox"/> Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |
| <input type="checkbox"/> Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |
| <ul style="list-style-type: none"> <li>For conducted measurement.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |  |
| <ul style="list-style-type: none"> <li>If the EUT supports multiple transmit chains using options given below:</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |
| <input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N <sub>TX</sub> output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. |  |
| <input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,                                                                                                                                                                                                                                |  |
| <input type="checkbox"/> Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.                                                                                                                                                                                                                                                                                                                                         |  |
| <ul style="list-style-type: none"> <li>If multiple transmit chains, EIRP PPSD calculation could be following as methods:<br/> <math display="block">PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n</math> (calculated in linear unit [mW] and transfer to log unit [dBm])<br/> <math display="block">EIRP_{total} = PPSD_{total} + DG</math> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                  |  |

### 3.4.4 Test Setup

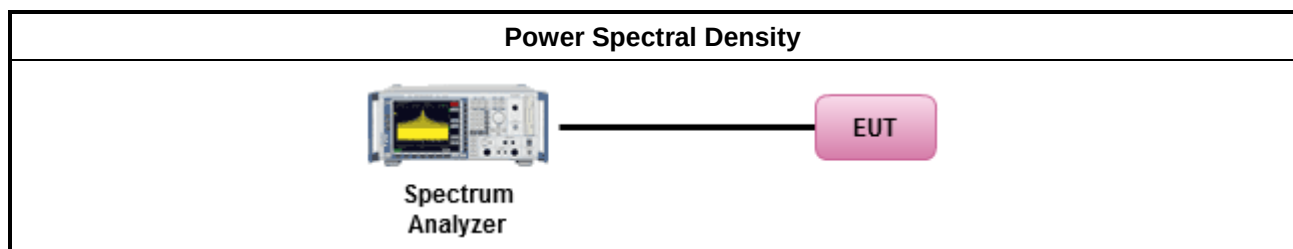



### **3.4.5 Test Result of Peak Power Spectral Density**

Refer as Appendix C

### 3.5 Unwanted Emissions

#### 3.5.1 Transmitter Radiated Unwanted Emissions Limit

| Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit |                       |                         |                      |
|-------------------------------------------------------------------------------|-----------------------|-------------------------|----------------------|
| Frequency Range (MHz)                                                         | Field Strength (uV/m) | Field Strength (dBuV/m) | Measure Distance (m) |
| 0.009~0.490                                                                   | 2400/F(kHz)           | 48.5 - 13.8             | 300                  |
| 0.490~1.705                                                                   | 24000/F(kHz)          | 33.8 - 23               | 30                   |
| 1.705~30.0                                                                    | 30                    | 29                      | 30                   |
| 30~88                                                                         | 100                   | 40                      | 3                    |
| 88~216                                                                        | 150                   | 43.5                    | 3                    |
| 216~960                                                                       | 200                   | 46                      | 3                    |
| Above 960                                                                     | 500                   | 54                      | 3                    |

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

| Un-restricted band emissions above 1GHz Limit |                                                                                                                                                                       |
|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating Band                                | Limit                                                                                                                                                                 |
| 5.15 - 5.25 GHz                               | e.i.r.p. -27 dBm [68.2 dBuV/m@3m]                                                                                                                                     |
| 5.25 - 5.35 GHz                               | e.i.r.p. -27 dBm [68.2 dBuV/m@3m]                                                                                                                                     |
| 5.47 - 5.725 GHz                              | e.i.r.p. -27 dBm [68.2 dBuV/m@3m]                                                                                                                                     |
| 5.725 - 5.85 GHz                              | 5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m]<br>5.85 5.86 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m]<br>Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m] |

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.5.3 Test Procedures


| Test Method |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             | <ul style="list-style-type: none"> <li>Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).</li> </ul> |
|             | <ul style="list-style-type: none"> <li>The average emission levels shall be measured in [duty cycle <math>\geq</math> 98 or duty factor].</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|             | <ul style="list-style-type: none"> <li>For the transmitter unwanted emissions shall be measured using following options below:</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|             | <ul style="list-style-type: none"> <li>Refer as FCC KDB 789033, clause H)2) for unwanted emissions into non-restricted bands.</li> <li>Refer as FCC KDB 789033, clause H)1) for unwanted emissions into restricted bands.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|             | <input type="checkbox"/> Refer as FCC KDB 789033, H)6) Method AD (Trace Averaging).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|             | <input checked="" type="checkbox"/> Refer as FCC KDB 789033, H)6) Method VB (Reduced VBW).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|             | <input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|             | <input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|             | <input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause H)5) measurement procedure peak limit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|             | <input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|             | <ul style="list-style-type: none"> <li>For radiated measurement.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|             | <ul style="list-style-type: none"> <li>Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|             | <ul style="list-style-type: none"> <li>Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|             | <ul style="list-style-type: none"> <li>Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|             | <ul style="list-style-type: none"> <li>The any unwanted emissions level shall not exceed the fundamental emission level.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|             | <ul style="list-style-type: none"> <li>All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

| Test Method |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             | <ul style="list-style-type: none"> <li>For conducted and cabinet radiation measurement, refer as FCC KDB 789033, clause H)3).</li> </ul>                                                                                                                                                                                                                                                                                                                                            |
|             | <ul style="list-style-type: none"> <li>For conducted unwanted emissions into non-restricted bands (relative emission limits).<br/>Devices with multiple transmit chains:<br/>Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.</li> </ul> |
|             | <ul style="list-style-type: none"> <li>For conducted unwanted emissions into restricted bands (absolute emission limits).<br/>Devices with multiple transmit chains using options given below:<br/>(1) Measure and sum the spectra across the outputs or<br/>(2) Measure and add 10 log(N) dB</li> </ul>                                                                                                                                                                            |
|             | <ul style="list-style-type: none"> <li>For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.</li> </ul>                                                                                      |




### 3.5.4 Test Setup

#### Transmitter Radiated Unwanted Emissions (below 1GHz)

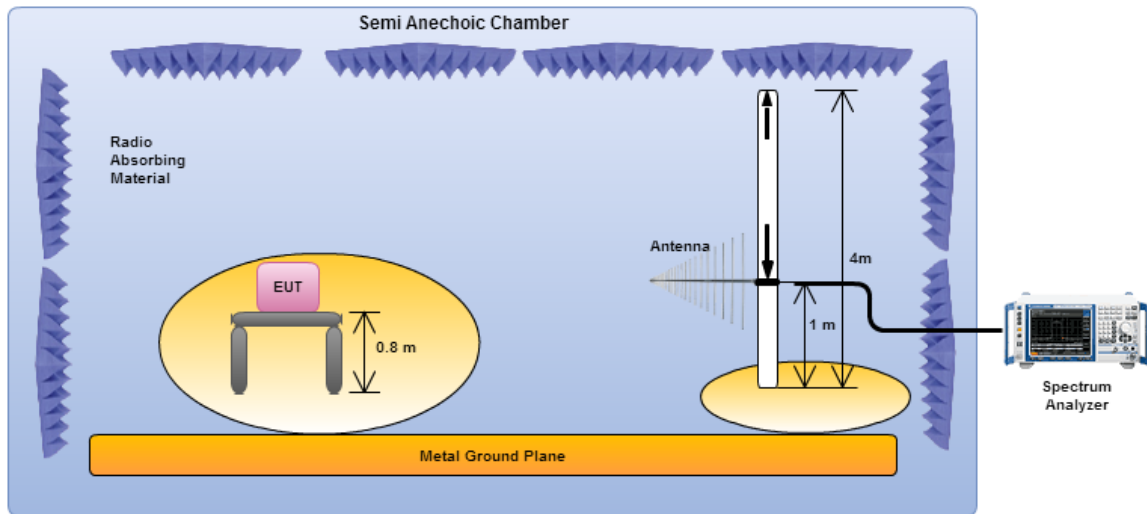


Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna.

#### Transmitter Radiated Unwanted Emissions (Above 1GHz)

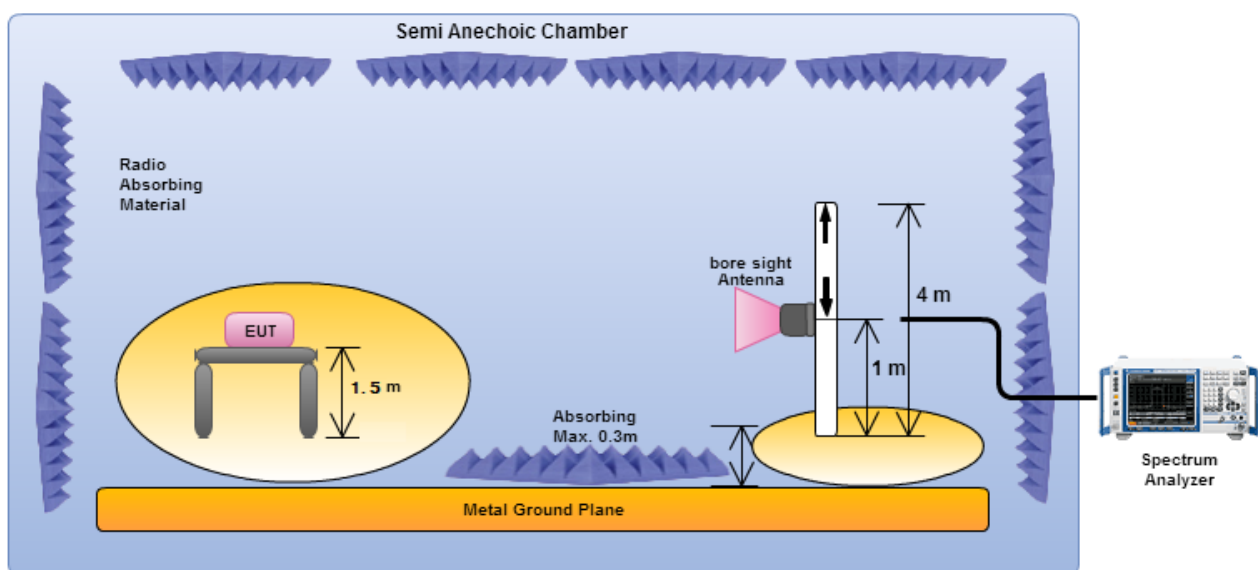

Electric field tests shall be performed in the frequency range of 1 GHz to 10th harmonic of highest fundamental frequency or 40 GHz using a calibrated horn antenna.

#### Transmitter Conducted Unwanted Emissions



### **3.5.5 Transmitter Unwanted Emissions (Below 30MHz)**

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

### **3.5.6 Transmitter Unwanted Emissions**

Antenna-ports conducted measurements are used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands; in the meanwhile, an additional radiated test with 50ohm terminator for cabinet spurious emission is also performed.

### **3.5.7 Test Result of Conducted test of spurious emission**

Refer as Appendix D

### **3.5.8 Test Result of Radatied test of spurious emission**

Refer as Appendix D

## 3.6 Frequency Stability

### 3.6.1 Frequency Stability Limit

| Frequency Stability Limit                                                                                                                                                                 |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <b>UNII Devices</b>                                                                                                                                                                       |  |
| <ul style="list-style-type: none"> <li>In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.</li> </ul> |  |
| <b>IEEE Std. 802.11</b>                                                                                                                                                                   |  |
| <ul style="list-style-type: none"> <li>The transmitter center frequency tolerance shall be <math>\pm 20</math> ppm maximum for the 5 GHz band.</li> </ul>                                 |  |


### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.6.3 Test Procedures

| Test Method                                                                                                      |                                                                                                           |
|------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>Refer as ANSI C63.10, clause 6.8 for frequency stability tests</li> </ul> |                                                                                                           |
|                                                                                                                  | <ul style="list-style-type: none"> <li>Frequency stability with respect to ambient temperature</li> </ul> |
|                                                                                                                  | <ul style="list-style-type: none"> <li>Frequency stability when varying supply voltage</li> </ul>         |

### 3.6.4 Test Setup

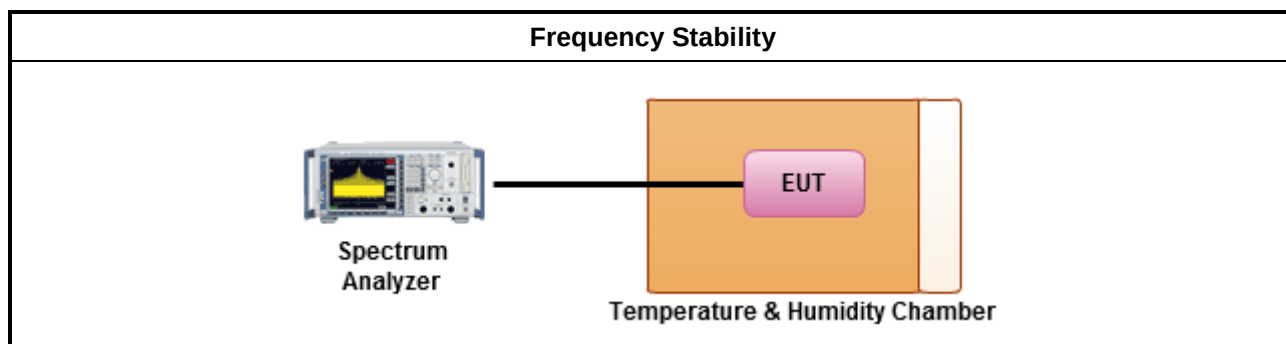



### **3.6.5 Test Result of Frequency Stability**

Refer as Appendix E

## 4 Test Equipment and Calibration Data

### Instrument for AC Conduction

| Instrument   | Manufacturer | Model No. | Serial No.     | Characteristics | Calibration Last Cal. | Calibration Due Date |
|--------------|--------------|-----------|----------------|-----------------|-----------------------|----------------------|
| EMC Receiver | KEYSIGHT     | N9038A    | MY54130031     | 20Hz ~ 8.4GHz   | Apr. 14, 2016         | Apr. 13, 2017        |
| LISN         | MessTec      | NNB-2/16Z | 2001/009       | 9kHz ~ 30MHz    | Oct. 21, 2015         | Oct. 20, 2016        |
| RF Cable-CON | HUBER+SUHNER | RG213/U   | 07611832010001 | 9kHz ~ 30MHz    | Feb. 26, 2016         | Feb. 25, 2017        |
| EMI Filter   | LINDGREN     | LRE-2060  | 1004           | < 450 Hz        | N/A                   | N/A                  |

### Instrument for Conducted Test


| Instrument        | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Last Cal. | Calibration Due Date |
|-------------------|--------------|-----------|------------|-----------------|-----------------------|----------------------|
| Spectrum Analyzer | R&S          | FSV 40    | 101500     | 9KHz~40GHz      | May 12, 2016          | May 11, 2017         |
| Power Sensor      | Anritsu      | MA2411B   | 917017     | 300MHz ~ 40GHz  | Feb. 04, 2016         | Feb. 03, 2017        |
| Power Meter       | Anritsu      | ML2495A   | 949003     | 300MHz ~ 40GHz  | Feb. 04, 2016         | Feb. 03, 2017        |
| Signal Generator  | R&S          | SMR40     | 100116     | 10MHz ~ 40GHz   | Jul. 28, 2015         | Jul. 27, 2016        |
| DC Power Source   | G.W.         | GPC-6030D | C671845    | DC 1V ~ 60V     | Jul. 22, 2015         | Jul. 21, 2016        |

### Instrument for Radiated Test

| Instrument               | Manufacturer   | Model No.               | Serial No.  | Characteristics    | Calibration Last Cal. | Calibration Due Date |
|--------------------------|----------------|-------------------------|-------------|--------------------|-----------------------|----------------------|
| 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M                  | 03CH03-HY   | 30MHz ~ 1GHz<br>3m | Nov. 28, 2015         | Nov. 27, 2016        |
| 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M                  | 03CH03-HY   | 1GHz ~ 18GHz<br>3m | Dec. 16, 2015         | Dec. 15, 2016        |
| Amplifier                | HP             | 8447D                   | 2944A08033  | 10kHz ~ 1.3GHz     | May 10, 2016          | May 09, 2017         |
| Amplifier                | Agilent        | 8449B                   | 3008A02120  | 1GHz ~ 26.5GHz     | Sep. 02, 2015         | Sep. 01, 2016        |
| Spectrum                 | R&S            | FSV40                   | 101513      | 9kHz ~ 40GHz       | Feb. 16, 2016         | Feb. 15, 2017        |
| Bilog Antenna            | SCHAFFNER      | CBL 6112D               | 22237       | 30MHz ~ 1GHz       | Sep. 18, 2015         | Sep. 17, 2016        |
| Horn Antenna             | SCHWARZBECK    | BBHA9120D               | 1531        | 1GHz ~ 18GHz       | Apr. 22, 2016         | Apr. 21, 2017        |
| Horn Antenna             | SCHWARZBECK    | BBHA9170                | BBHA9170154 | 18GHz ~ 40GHz      | Jan. 29, 2016         | Jan. 28, 2017        |
| 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M                  | 03CH03-HY   | 30MHz ~ 1GHz<br>3m | Nov. 28, 2015         | Nov. 27, 2016        |
| Amplifier                | MITEQ          | JS44-18004000-3<br>3-8P | 1840917     | 18GHz ~ 40GHz      | Jun. 02, 2015         | Jun. 01, 2017        |
| Loop Antenna             | TESEQ          | HLA 6120                | 31244       | 9 kHz~30 MHz       | Feb. 02, 2015         | Feb. 01, 2017        |
| DC Power Source          | G.W.           | GPC-6030D               | C671845     | DC 1V ~ 60V        | Jul. 22, 2015         | Jul. 21, 2016        |

## AC Power-line Conducted Emissions Result

|                    |                              |             |         |
|--------------------|------------------------------|-------------|---------|
| Operating Mode     | 1                            | Power Phase | Neutral |
| Operating Function | AC Power & Radio link (WLAN) |             |         |

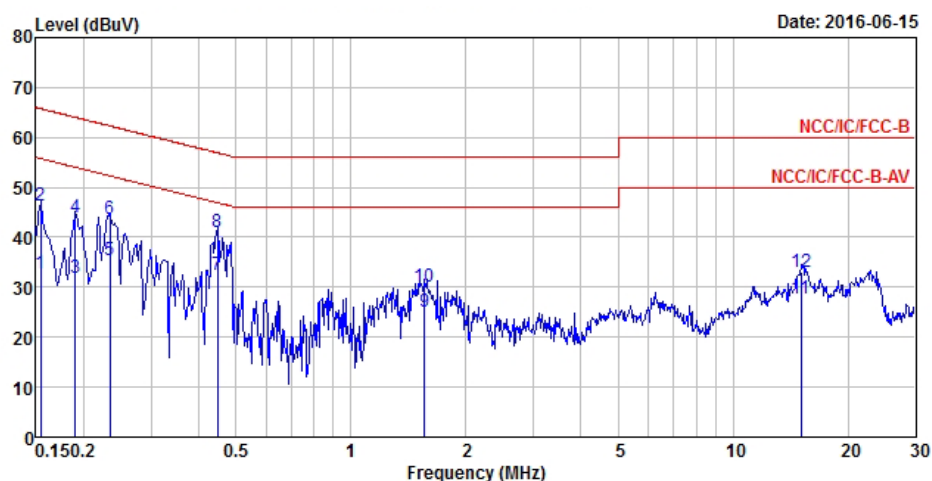


|    | Freq  | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  |
|----|-------|-------|------------|------------|------------|-------------|------------|---------|
|    | MHz   | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |
| 1  | 0.15  | 32.84 | -22.94     | 55.78      | 22.78      | 0.10        | 0.10       | Average |
| 2  | 0.15  | 46.33 | -19.45     | 65.78      | 36.27      | 0.10        | 0.10       | QP      |
| 3  | 0.19  | 31.96 | -22.06     | 54.02      | 21.91      | 0.09        | 0.10       | Average |
| 4  | 0.19  | 43.95 | -20.07     | 64.02      | 33.90      | 0.09        | 0.10       | QP      |
| 5  | 0.23  | 35.51 | -16.79     | 52.30      | 25.46      | 0.09        | 0.10       | Average |
| 6  | 0.23  | 43.72 | -18.58     | 62.30      | 33.67      | 0.09        | 0.10       | QP      |
| 7  | 0.45  | 32.59 | -14.34     | 46.93      | 22.53      | 0.10        | 0.10       | Average |
| 8  | 0.45  | 41.00 | -15.93     | 56.93      | 30.94      | 0.10        | 0.10       | QP      |
| 9  | 1.56  | 25.18 | -20.82     | 46.00      | 15.07      | 0.14        | 0.10       | Average |
| 10 | 1.56  | 30.18 | -25.82     | 56.00      | 20.07      | 0.14        | 0.10       | QP      |
| 11 | 15.07 | 27.80 | -22.20     | 50.00      | 17.17      | 0.59        | 0.10       | Average |
| 12 | 15.07 | 32.95 | -27.05     | 60.00      | 22.32      | 0.59        | 0.10       | QP      |

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

## AC Power-line Conducted Emissions Result

|                    |                              |             |      |
|--------------------|------------------------------|-------------|------|
| Operating Mode     | 1                            | Power Phase | Line |
| Operating Function | AC Power & Radio link (WLAN) |             |      |

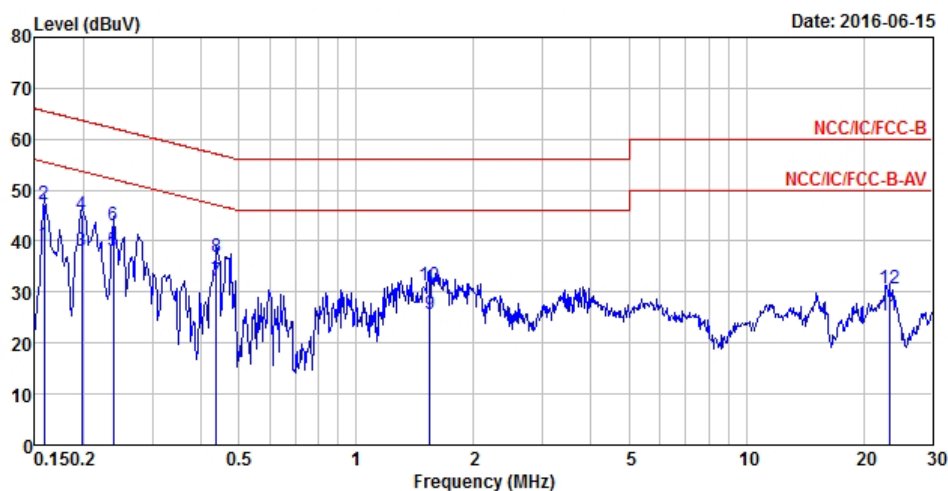

|    | Freq  | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  |
|----|-------|-------|------------|------------|------------|-------------|------------|---------|
|    | MHz   | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |
| 1  | 0.16  | 39.17 | -16.39     | 55.56      | 29.09      | 0.12        | 0.10       | Average |
| 2  | 0.16  | 47.38 | -18.18     | 65.56      | 37.30      | 0.12        | 0.10       | QP      |
| 3  | 0.20  | 38.13 | -15.58     | 53.71      | 28.05      | 0.12        | 0.10       | Average |
| 4  | 0.20  | 45.19 | -18.52     | 63.71      | 35.11      | 0.12        | 0.10       | QP      |
| 5  | 0.24  | 37.96 | -14.21     | 52.17      | 27.88      | 0.12        | 0.10       | Average |
| 6  | 0.24  | 43.21 | -18.96     | 62.17      | 33.13      | 0.12        | 0.10       | QP      |
| 7  | 0.44  | 32.29 | -14.82     | 47.11      | 22.20      | 0.13        | 0.10       | Average |
| 8  | 0.44  | 36.99 | -20.12     | 57.11      | 26.90      | 0.13        | 0.10       | QP      |
| 9  | 1.54  | 25.70 | -20.30     | 46.00      | 15.55      | 0.18        | 0.10       | Average |
| 10 | 1.54  | 31.25 | -24.75     | 56.00      | 21.10      | 0.18        | 0.10       | QP      |
| 11 | 23.26 | 25.47 | -24.53     | 50.00      | 14.02      | 1.28        | 0.20       | Average |
| 12 | 23.26 | 30.82 | -29.18     | 60.00      | 19.37      | 1.28        | 0.20       | QP      |

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)



Summary

| Mode                     | N dB<br>(Hz) | OBW<br>(Hz) | ITU-Code |
|--------------------------|--------------|-------------|----------|
| 5.2G;11a;20;1;1(2)       | 20M          | 16.467M     | 16M5D1D  |
| 5.8G;11a;20;1;1(2)       | 16.6M        | 16.567M     | 16M6D1D  |
| 5.2G;HT20;20;1,(M0-23);3 | 20M          | 17.816M     | 17M8D1D  |
| 5.8G;HT20;20;1,(M0-23);3 | 17.7M        | 17.716M     | 17M7D1D  |
| 5.2G;HT40;40;1,(M0-23);3 | 41.2M        | 36.032M     | 36M0D1D  |
| 5.8G;HT40;40;1,(M0-23);3 | 36.35M       | 36.232M     | 36M2D1D  |







Result

| Mode                                  | Result | Limit | P1-N dB<br>(Hz) | P1-OBW<br>(Hz) | P2-N dB<br>(Hz) | P2-OBW<br>(Hz) | P3-N dB<br>(Hz) | P3-OBW<br>(Hz) |
|---------------------------------------|--------|-------|-----------------|----------------|-----------------|----------------|-----------------|----------------|
| 5.2G;11a;20;1;1(2);5180;L;TN,VN       | Pass   | Inf   |                 |                | 19.625M         | 16.467M        |                 |                |
| 5.2G;11a;20;1;1(2);5200;M;TN,VN       | Pass   | Inf   |                 |                | 19.675M         | 16.467M        |                 |                |
| 5.2G;11a;20;1;1(2);5240;H;TN,VN       | Pass   | Inf   |                 |                | 20M             | 16.467M        |                 |                |
| 5.8G;11a;20;1;1(2);5745;L;TN,VN       | Pass   | 500k  |                 |                | 16.475M         | 16.567M        |                 |                |
| 5.8G;11a;20;1;1(2);5785;M;TN,VN       | Pass   | 500k  |                 |                | 16.55M          | 16.542M        |                 |                |
| 5.8G;11a;20;1;1(2);5825;H;TN,VN       | Pass   | 500k  |                 |                | 16.6M           | 16.517M        |                 |                |
| 5.2G;HT20;20;1,(M0-23);3;5180;L;TN,VN | Pass   | Inf   | 19.775M         | 17.516M        | 19.975M         | 17.816M        | 20M             | 17.641M        |
| 5.2G;HT20;20;1,(M0-23);3;5200;M;TN,VN | Pass   | Inf   | 19.55M          | 17.466M        | 18.975M         | 17.191M        | 19.55M          | 17.391M        |
| 5.2G;HT20;20;1,(M0-23);3;5240;H;TN,VN | Pass   | Inf   | 19.625M         | 17.441M        | 19.4M           | 17.416M        | 19.6M           | 17.491M        |
| 5.8G;HT20;20;1,(M0-23);3;5745;L;TN,VN | Pass   | 500k  | 17.675M         | 17.666M        | 17.6M           | 17.566M        | 17.575M         | 17.591M        |
| 5.8G;HT20;20;1,(M0-23);3;5785;M;TN,VN | Pass   | 500k  | 17.7M           | 17.716M        | 17.625M         | 17.591M        | 17.575M         | 17.566M        |
| 5.8G;HT20;20;1,(M0-23);3;5825;H;TN,VN | Pass   | 500k  | 17.2M           | 17.466M        | 17.525M         | 17.441M        | 17.625M         | 17.641M        |
| 5.2G;HT40;40;1,(M0-23);3;5190;L;TN,VN | Pass   | Inf   | 39.9M           | 35.732M        | 38.5M           | 35.032M        | 40.15M          | 35.682M        |
| 5.2G;HT40;40;1,(M0-23);3;5230;H;TN,VN | Pass   | Inf   | 40.65M          | 35.832M        | 40.45M          | 35.932M        | 41.2M           | 36.032M        |
| 5.8G;HT40;40;1,(M0-23);3;5755;L;TN,VN | Pass   | 500k  | 36.35M          | 35.832M        | 36.15M          | 35.932M        | 36.3M           | 35.882M        |
| 5.8G;HT40;40;1,(M0-23);3;5795;H;TN,VN | Pass   | 500k  | 34.65M          | 35.632M        | 36.1M           | 36.232M        | 36.35M          | 35.982M        |



EBW Result





Appendix A

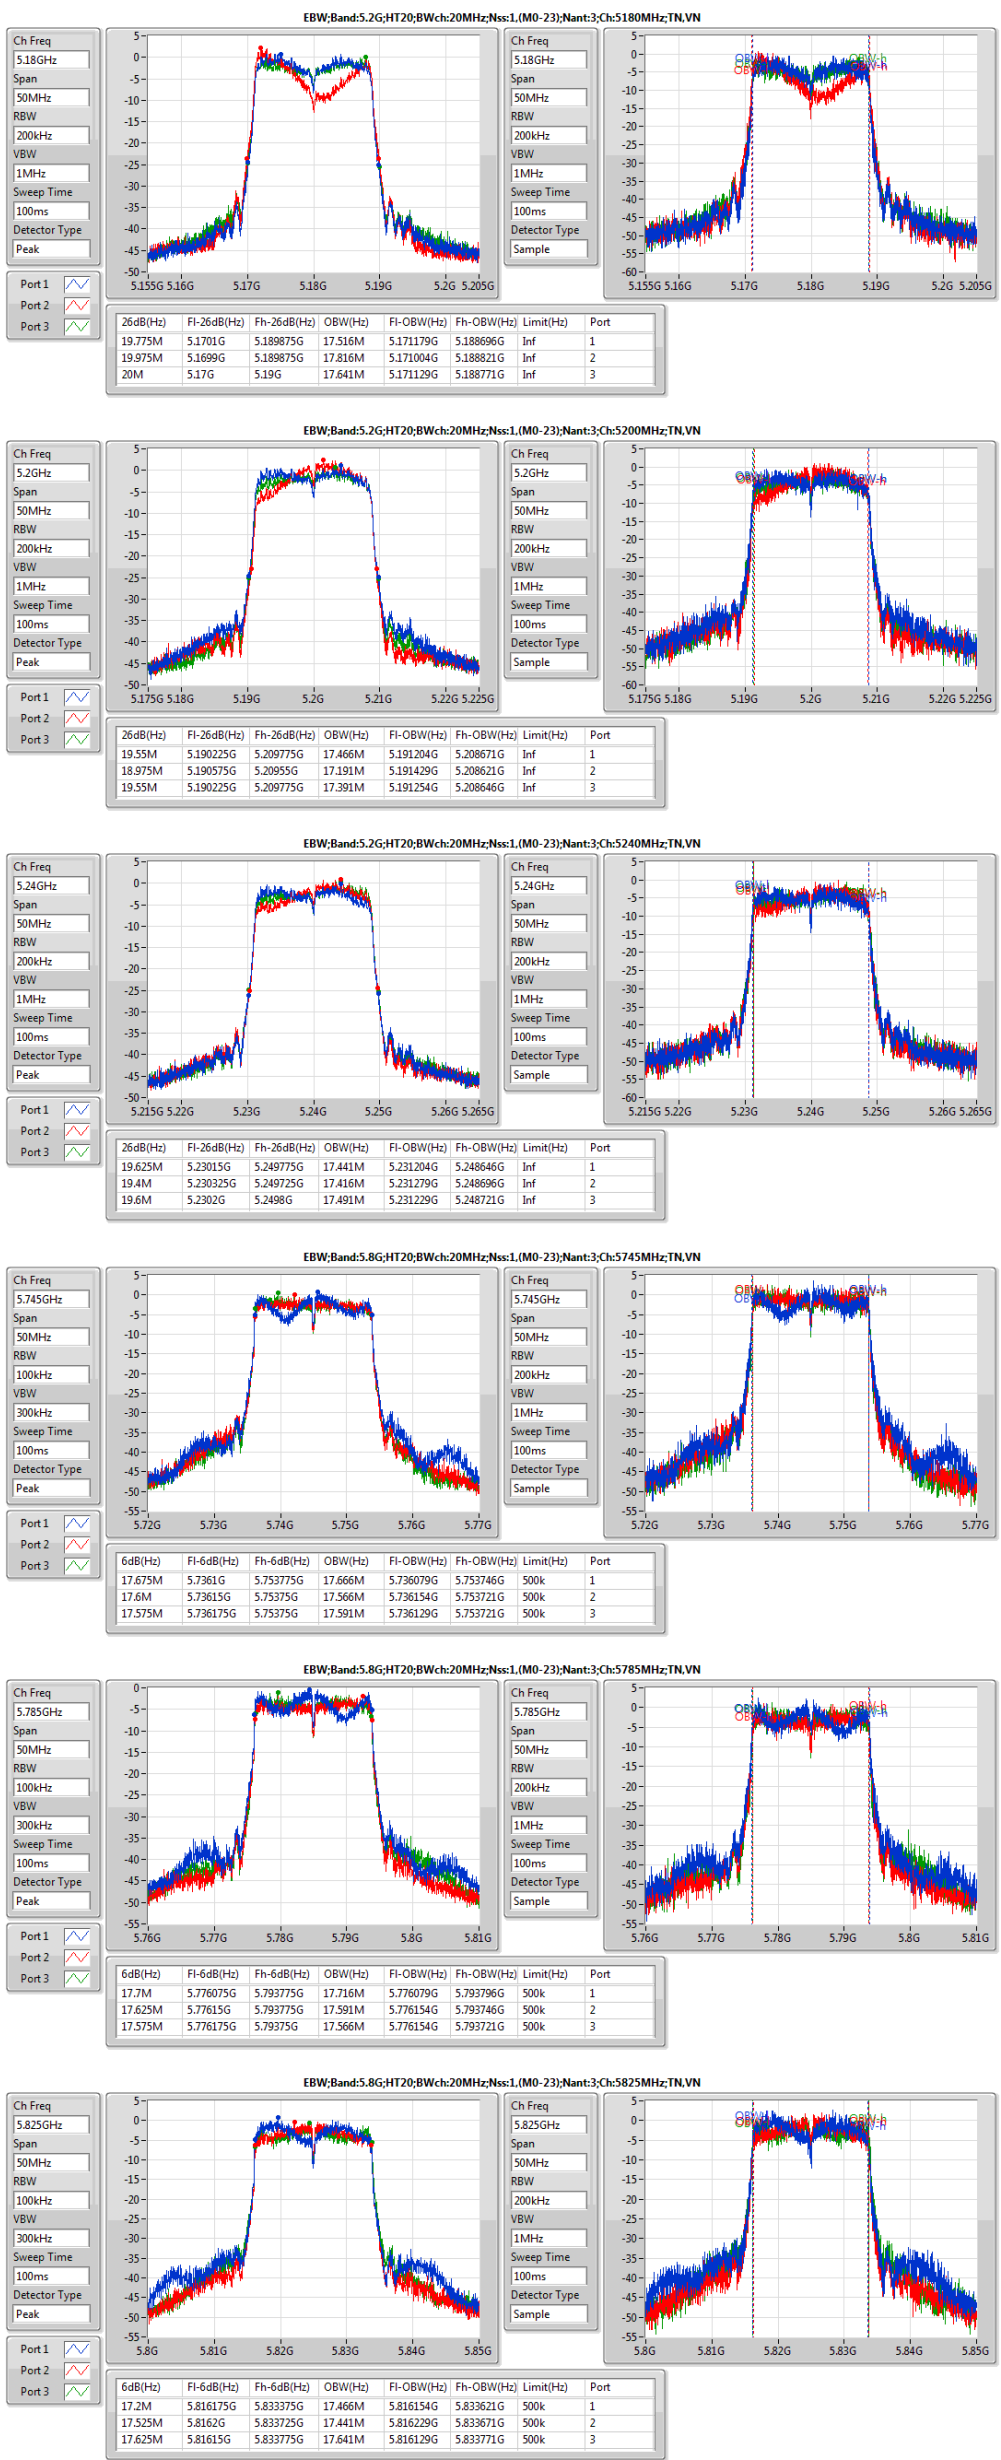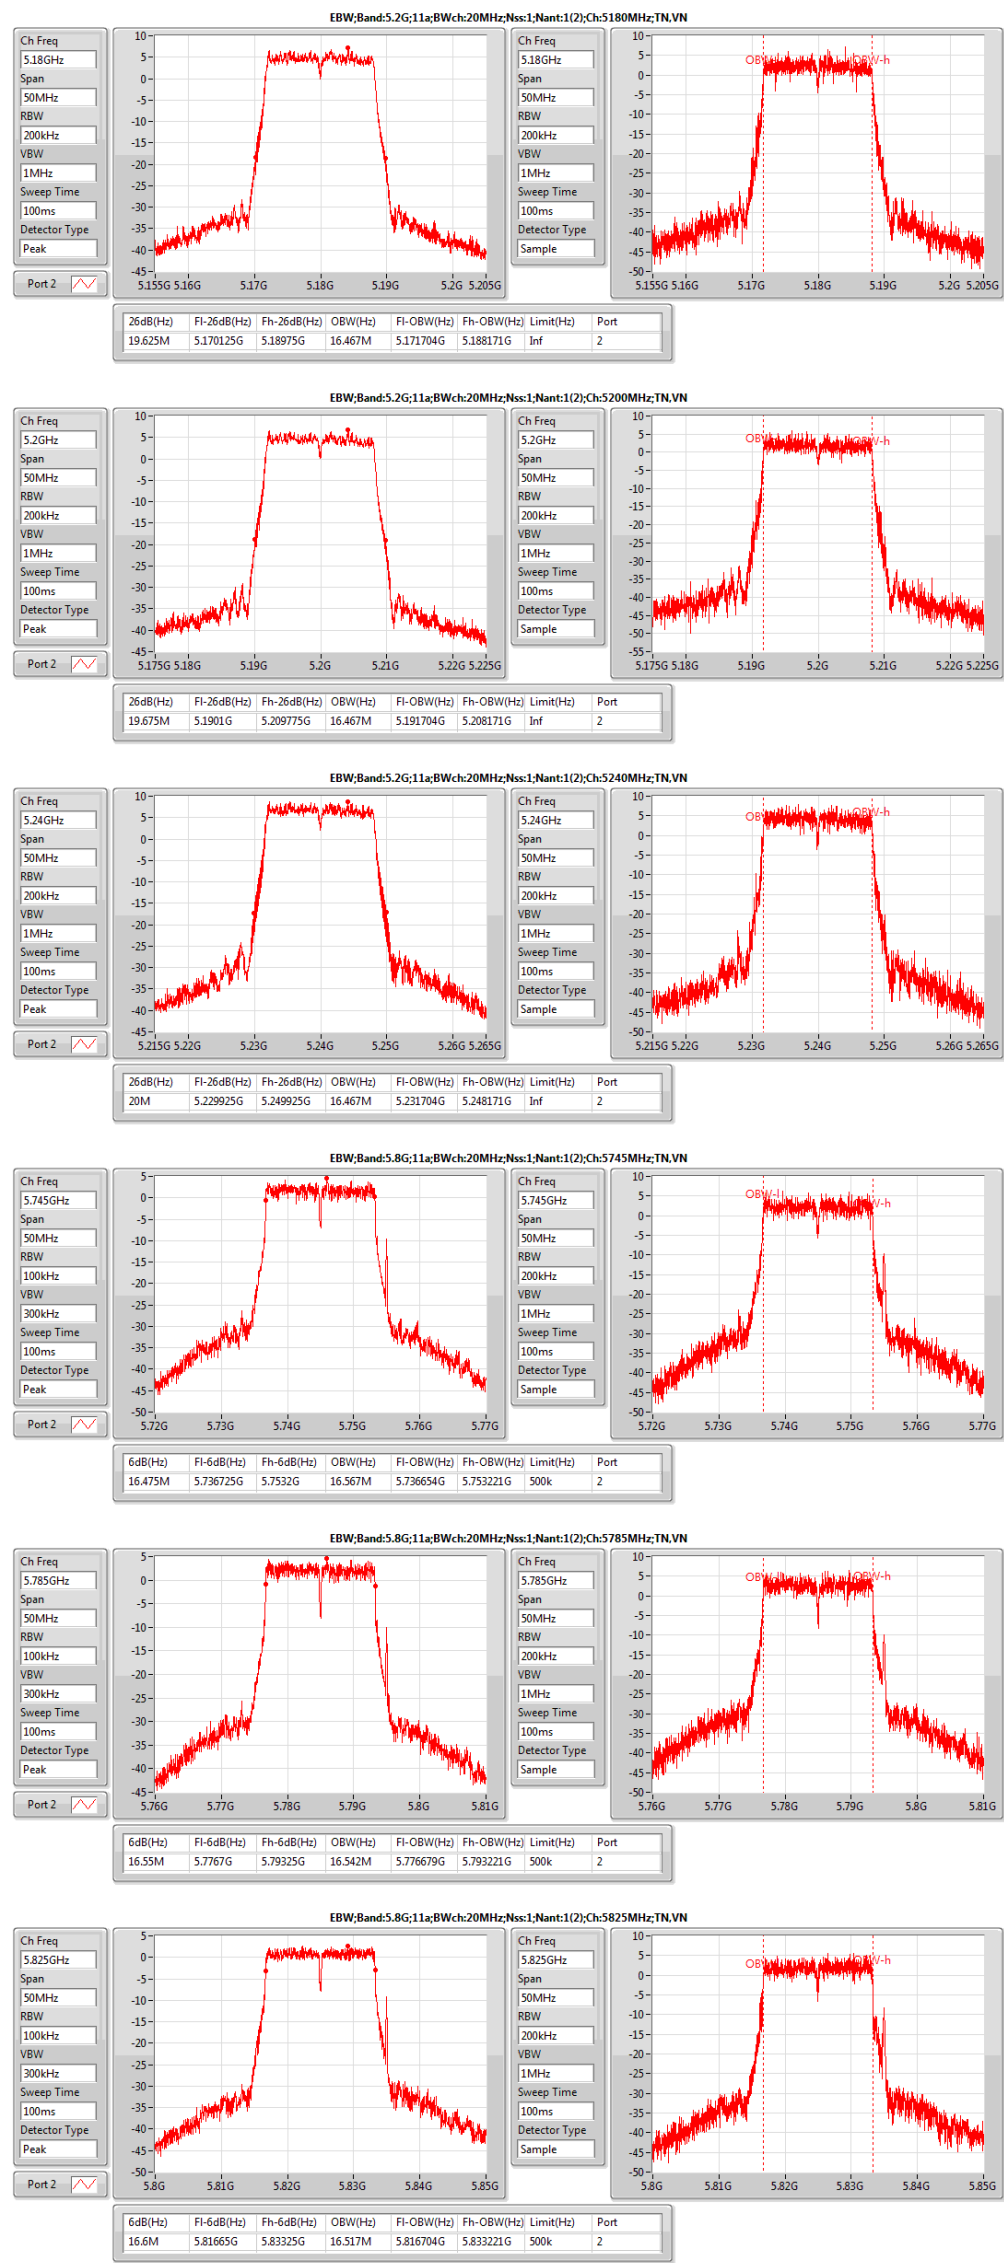



EBW Result

Appendix A

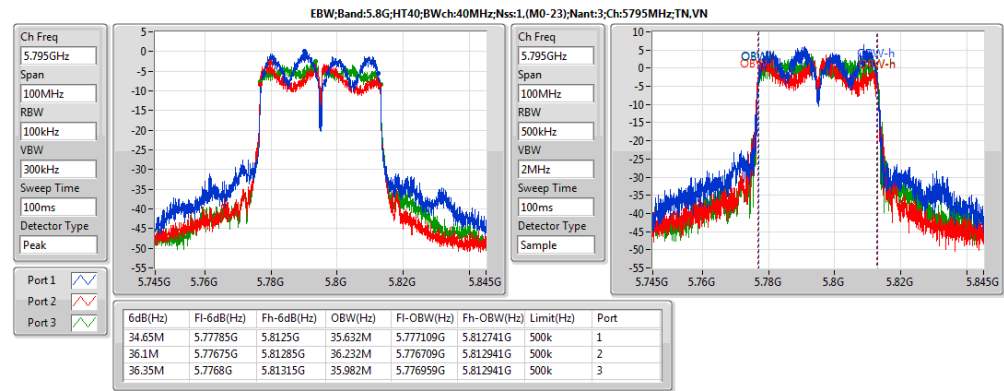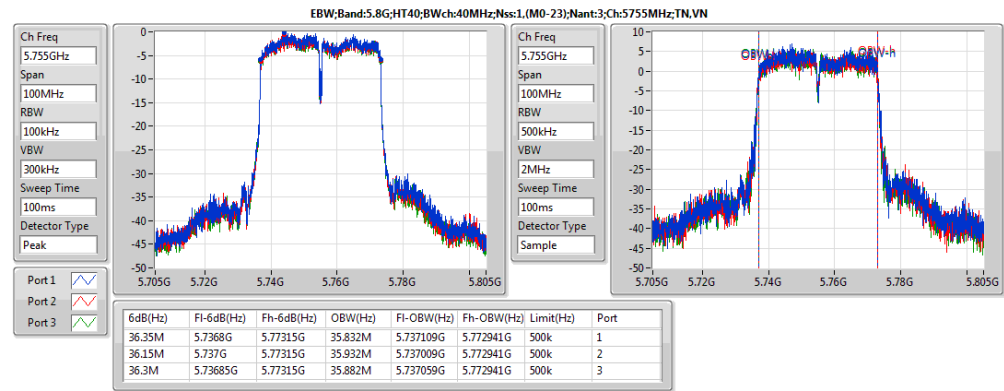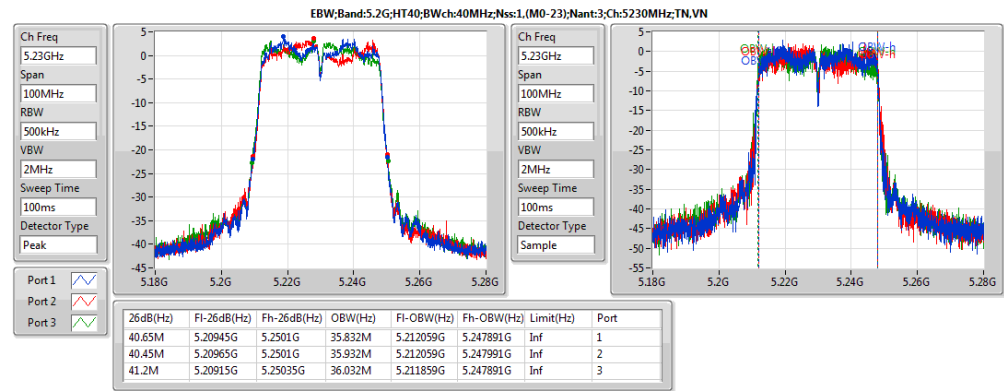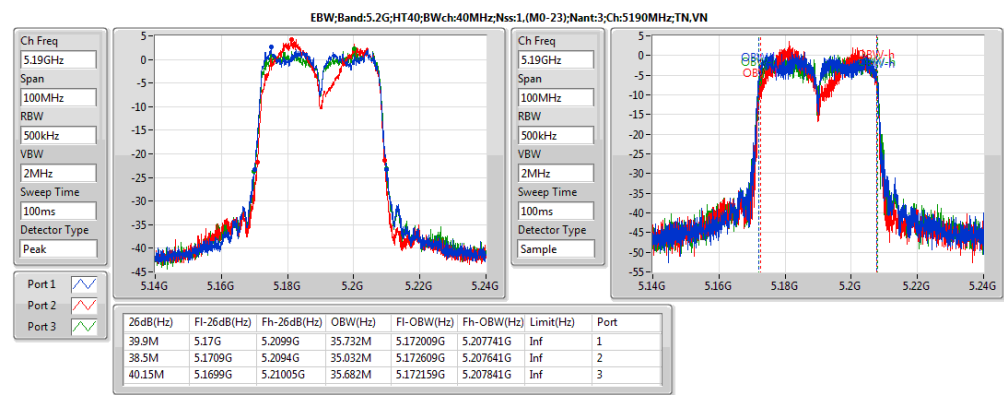



Summary

| Mode                     | Sum<br>(dBm) | Sum<br>(W) | EIRP<br>(dBm) | EIRP<br>(W) |
|--------------------------|--------------|------------|---------------|-------------|
| 5.2G;11a;20;1;1(2)       | 20.78        | 0.11967    | 22.68         | 0.18535     |
| 5.8G;11a;20;1;1(2)       | 17.1         | 0.05129    | 19.00         | 0.07943     |
| 5.2G;HT20;20;1,(M0-23);3 | 15.92        | 0.03908    | 17.82         | 0.06053     |
| 5.8G;HT20;20;1,(M0-23);3 | 17.73        | 0.05929    | 19.63         | 0.09183     |
| 5.2G;HT40;40;1,(M0-23);3 | 16.55        | 0.04519    | 18.45         | 0.06998     |
| 5.8G;HT40;40;1,(M0-23);3 | 17.85        | 0.06095    | 19.75         | 0.09441     |



Result

| Mode                                  | Result | DG<br>(dBi) | EIRP<br>(dBm) | EIRP Lim.<br>(dBm) | Sum<br>(dBm) | Sum Lim.<br>(dBm) | P1<br>(dBm) | P2<br>(dBm) | P3<br>(dBm) |
|---------------------------------------|--------|-------------|---------------|--------------------|--------------|-------------------|-------------|-------------|-------------|
| 5.2G;11a;20;1;1(2);5180;L;TN,VN       | Pass   | 1.90        | 20.52         | 36.00              | 18.62        | 30.00             |             | 18.62       |             |
| 5.2G;11a;20;1;1(2);5200;M;TN,VN       | Pass   | 1.90        | 19.37         | 36.00              | 17.47        | 30.00             |             | 17.47       |             |
| 5.2G;11a;20;1;1(2);5240;H;TN,VN       | Pass   | 1.90        | 22.68         | 36.00              | 20.78        | 30.00             |             | 20.78       |             |
| 5.8G;11a;20;1;1(2);5745;L;TN,VN       | Pass   | 1.90        | 18.58         | 36.00              | 16.68        | 30.00             |             | 16.68       |             |
| 5.8G;11a;20;1;1(2);5785;M;TN,VN       | Pass   | 1.90        | 19.00         | 36.00              | 17.1         | 30.00             |             | 17.10       |             |
| 5.8G;11a;20;1;1(2);5825;H;TN,VN       | Pass   | 1.90        | 18.53         | 36.00              | 16.63        | 30.00             |             | 16.63       |             |
| 5.2G;HT20;20;1,(M0-23);3;5180;L;TN,VN | Pass   | 1.90        | 17.13         | 36.00              | 15.23        | 30.00             | 10.97       | 9.72        | 10.60       |
| 5.2G;HT20;20;1,(M0-23);3;5200;M;TN,VN | Pass   | 1.90        | 17.82         | 36.00              | 15.92        | 30.00             | 11.20       | 11.42       | 10.80       |
| 5.2G;HT20;20;1,(M0-23);3;5240;H;TN,VN | Pass   | 1.90        | 17.11         | 36.00              | 15.21        | 30.00             | 10.40       | 10.28       | 10.63       |
| 5.8G;HT20;20;1,(M0-23);3;5745;L;TN,VN | Pass   | 1.90        | 18.84         | 36.00              | 16.94        | 30.00             | 12.02       | 12.30       | 12.19       |
| 5.8G;HT20;20;1,(M0-23);3;5785;M;TN,VN | Pass   | 1.90        | 18.85         | 36.00              | 16.95        | 30.00             | 12.37       | 11.88       | 12.28       |
| 5.8G;HT20;20;1,(M0-23);3;5825;H;TN,VN | Pass   | 1.90        | 19.63         | 36.00              | 17.73        | 30.00             | 13.36       | 12.90       | 12.58       |
| 5.2G;HT40;40;1,(M0-23);3;5190;L;TN,VN | Pass   | 1.90        | 17.51         | 36.00              | 15.61        | 30.00             | 10.84       | 10.87       | 10.81       |
| 5.2G;HT40;40;1,(M0-23);3;5230;H;TN,VN | Pass   | 1.90        | 18.45         | 36.00              | 16.55        | 30.00             | 11.97       | 11.61       | 11.75       |
| 5.8G;HT40;40;1,(M0-23);3;5755;L;TN,VN | Pass   | 1.90        | 19.75         | 36.00              | 17.85        | 30.00             | 13.72       | 12.43       | 12.99       |
| 5.8G;HT40;40;1,(M0-23);3;5795;H;TN,VN | Pass   | 1.90        | 19.70         | 36.00              | 17.80        | 30.00             | 13.82       | 12.38       | 12.75       |

| Maximum Conducted Output Power (5150-5250MHz band) |                 |             |                            |              |              |           |
|----------------------------------------------------|-----------------|-------------|----------------------------|--------------|--------------|-----------|
| Condition                                          |                 |             | RF Output Peak Power (dBm) |              |              |           |
| Modulation Mode                                    | N <sub>TX</sub> | Freq. (MHz) | Chain Port 1               | Chain Port 2 | Chain Port 3 | Sum Chain |
| 11a                                                | 3               | 5180        | -                          | 23.54        | -            | 23.54     |
| 11a                                                | 3               | 5200        | -                          | 22.51        | -            | 22.51     |
| 11a                                                | 3               | 5240        | -                          | 25.73        | -            | 25.73     |
| HT20                                               | 3               | 5180        | 16.15                      | 14.37        | 15.91        | 20.32     |
| HT20                                               | 3               | 5200        | 16.40                      | 16.62        | 15.92        | 21.10     |
| HT20,                                              | 3               | 5240        | 15.62                      | 15.38        | 15.85        | 20.39     |
| HT40                                               | 3               | 5190        | 15.70                      | 15.89        | 15.59        | 20.50     |
| HT40                                               | 3               | 5230        | 17.24                      | 16.55        | 17.04        | 21.72     |

| Maximum Conducted Output Power (5725-5825MHz band) |                 |             |                            |              |              |           |
|----------------------------------------------------|-----------------|-------------|----------------------------|--------------|--------------|-----------|
| Condition                                          |                 |             | RF Output Peak Power (dBm) |              |              |           |
| Modulation Mode                                    | N <sub>TX</sub> | Freq. (MHz) | Chain Port 1               | Chain Port 2 | Chain Port 3 | Sum Chain |
| 11a                                                | 3               | 5745        | -                          | 21.66        | -            | 21.66     |
| 11a                                                | 3               | 5785        | -                          | 21.91        | -            | 21.91     |
| 11a                                                | 3               | 5805        | -                          | 21.63        | -            | 21.63     |
| HT20                                               | 3               | 5745        | 17.21                      | 17.48        | 17.22        | 22.08     |
| HT20                                               | 3               | 5785        | 18.16                      | 16.41        | 17.23        | 22.10     |
| HT20,                                              | 3               | 5805        | 18.66                      | 17.89        | 17.55        | 22.83     |
| HT40                                               | 3               | 5755        | 18.20                      | 17.42        | 17.57        | 22.52     |
| HT40                                               | 3               | 5795        | 18.49                      | 17.11        | 18.01        | 22.68     |





Summary













| Mode                     | PD<br>(dBm/RBW) | EIRP.PD<br>(dBm/RBW) |
|--------------------------|-----------------|----------------------|
| 5.2G;11a;20;1;1(2)       | 8.61            | 10.51                |
| 5.8G;11a;20;1;1(2)       | 4.43            | 6.33                 |
| 5.2G;HT20;20;1,(M0-23);3 | 5.94            | 12.61                |
| 5.8G;HT20;20;1,(M0-23);3 | 4.93            | 11.60                |
| 5.2G;HT40;40;1,(M0-23);3 | 3.23            | 9.90                 |
| 5.8G;HT40;40;1,(M0-23);3 | 4.14            | 10.81                |







Result

| Mode                                  | Result | Meas.RBW<br>(Hz) | Lim.RBW<br>(Hz) | BWCF<br>(dB) | DG<br>(dBi) | Sum.Max<br>(dBm/RBW) | PD<br>(dBm/RBW) | PD.Limit<br>(dBm/RBW) | EIRP.PD<br>(dBm/RBW) | EIRP.PD.Li<br>m<br>(dBm/RBW) | P1<br>(dBm/RBW) | P2<br>(dBm/RBW) | P3<br>(dBm/RBW) |
|---------------------------------------|--------|------------------|-----------------|--------------|-------------|----------------------|-----------------|-----------------------|----------------------|------------------------------|-----------------|-----------------|-----------------|
| 5.2G;11a;20;1;1(2);5180;L;TN,VN       | Pass   | 1M               | 1M              | 0.00         | 1.90        | 6.32                 | 6.32            | 17.00                 | 8.22                 | Inf                          |                 | 6.32            |                 |
| 5.2G;11a;20;1;1(2);5200;M;TN,VN       | Pass   | 1M               | 1M              | 0.00         | 1.90        | 6.00                 | 6.00            | 17.00                 | 7.90                 | Inf                          |                 | 6.00            |                 |
| 5.2G;11a;20;1;1(2);5240;H;TN,VN       | Pass   | 1M               | 1M              | 0.00         | 1.90        | 8.61                 | 8.61            | 17.00                 | 10.51                | Inf                          |                 | 8.61            |                 |
| 5.8G;11a;20;1;1(2);5745;L;TN,VN       | Pass   | 500k             | 500k            | 0.00         | 1.90        | 3.58                 | 3.58            | 30.00                 | 5.48                 | 36.00                        |                 | 3.58            |                 |
| 5.8G;11a;20;1;1(2);5785;M;TN,VN       | Pass   | 500k             | 500k            | 0.00         | 1.90        | 4.43                 | 4.43            | 30.00                 | 6.33                 | 36.00                        |                 | 4.43            |                 |
| 5.8G;11a;20;1;1(2);5825;H;TN,VN       | Pass   | 500k             | 500k            | 0.00         | 1.90        | 3.28                 | 3.28            | 30.00                 | 5.18                 | 36.00                        |                 | 3.28            |                 |
| 5.2G;HT20;20;1,(M0-23);3;5180;L;TN,VN | Pass   | 1M               | 1M              | 0.00         | 6.67        | 5.43                 | 5.43            | 16.33                 | 12.10                | Inf                          | 0.86            | 1.94            | 0.28            |
| 5.2G;HT20;20;1,(M0-23);3;5200;M;TN,VN | Pass   | 1M               | 1M              | 0.00         | 6.67        | 5.94                 | 5.94            | 16.33                 | 12.61                | Inf                          | 0.84            | 2.52            | 0.97            |
| 5.2G;HT20;20;1,(M0-23);3;5240;H;TN,VN | Pass   | 1M               | 1M              | 0.00         | 6.67        | 5.33                 | 5.33            | 16.33                 | 12.00                | Inf                          | 0.13            | 1.63            | 1.09            |
| 5.8G;HT20;20;1,(M0-23);3;5745;L;TN,VN | Pass   | 500k             | 500k            | 0.00         | 6.67        | 4.93                 | 4.93            | 29.33                 | 11.60                | 35.33                        | 1.58            | 0.27            | 0.76            |
| 5.8G;HT20;20;1,(M0-23);3;5785;M;TN,VN | Pass   | 500k             | 500k            | 0.00         | 6.67        | 3.28                 | 3.28            | 29.33                 | 9.95                 | 35.33                        | 0.07            | -1.31           | -0.74           |
| 5.8G;HT20;20;1,(M0-23);3;5825;H;TN,VN | Pass   | 500k             | 500k            | 0.00         | 6.67        | 3.87                 | 3.87            | 29.33                 | 10.55                | 35.33                        | 0.71            | 0.18            | -0.15           |
| 5.2G;HT40;40;1,(M0-23);3;5190;L;TN,VN | Pass   | 1M               | 1M              | 0.00         | 6.67        | 2.59                 | 2.59            | 16.33                 | 9.26                 | Inf                          | -2.32           | -0.34           | -2.54           |
| 5.2G;HT40;40;1,(M0-23);3;5230;H;TN,VN | Pass   | 1M               | 1M              | 0.00         | 6.67        | 3.23                 | 3.23            | 16.33                 | 9.90                 | Inf                          | -0.68           | -0.76           | -0.89           |
| 5.8G;HT40;40;1,(M0-23);3;5755;L;TN,VN | Pass   | 500k             | 500k            | 0.00         | 6.67        | 4.14                 | 4.14            | 29.33                 | 10.81                | 35.33                        | -0.29           | -0.34           | -0.41           |
| 5.8G;HT40;40;1,(M0-23);3;5795;H;TN,VN | Pass   | 500k             | 500k            | 0.00         | 6.67        | 2.61                 | 2.61            | 29.33                 | 9.28                 | 35.33                        | 0.21            | -2.67           | -2.60           |



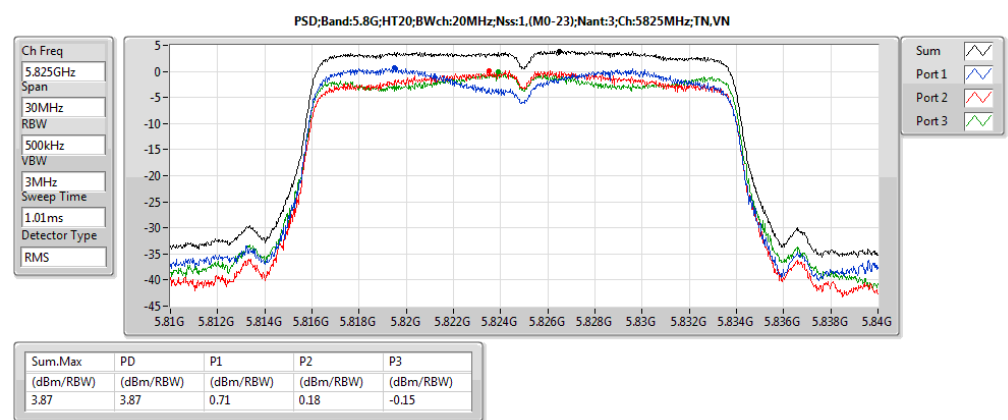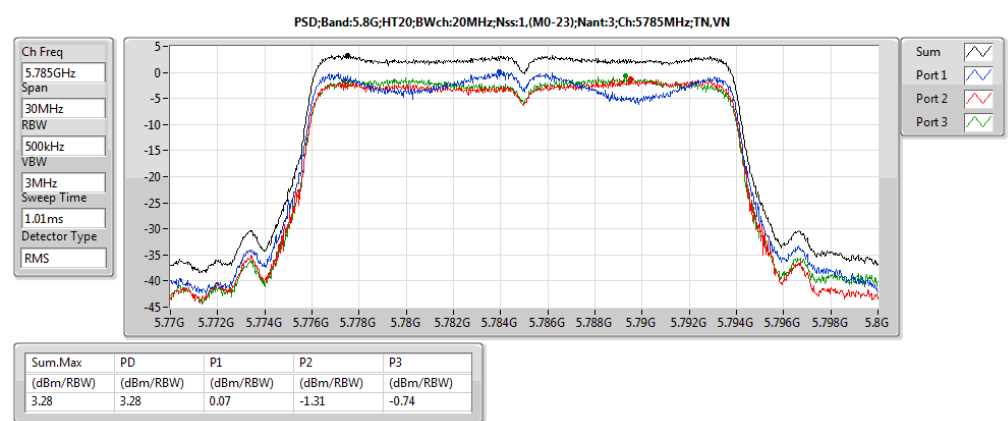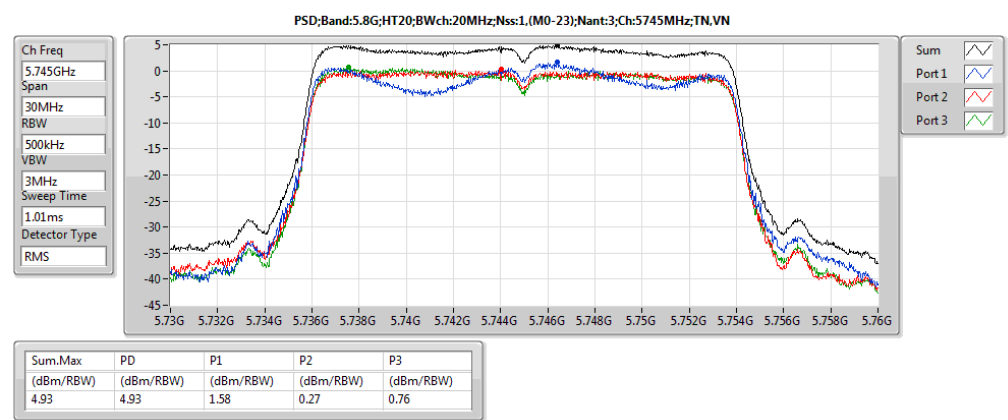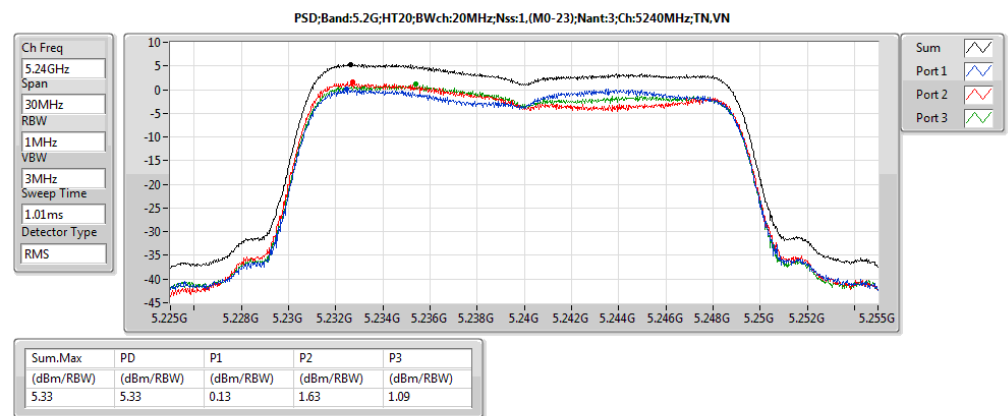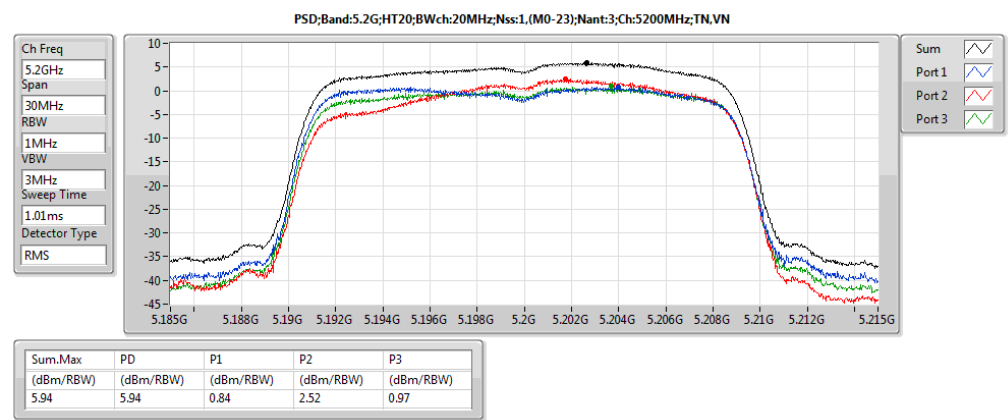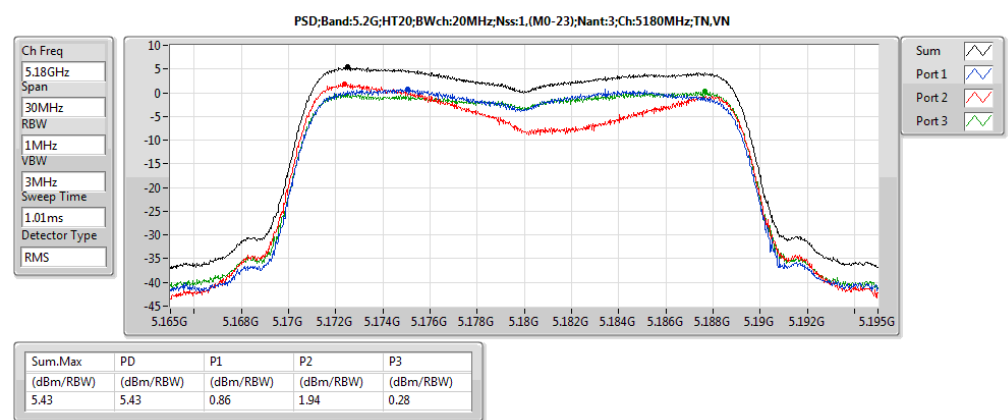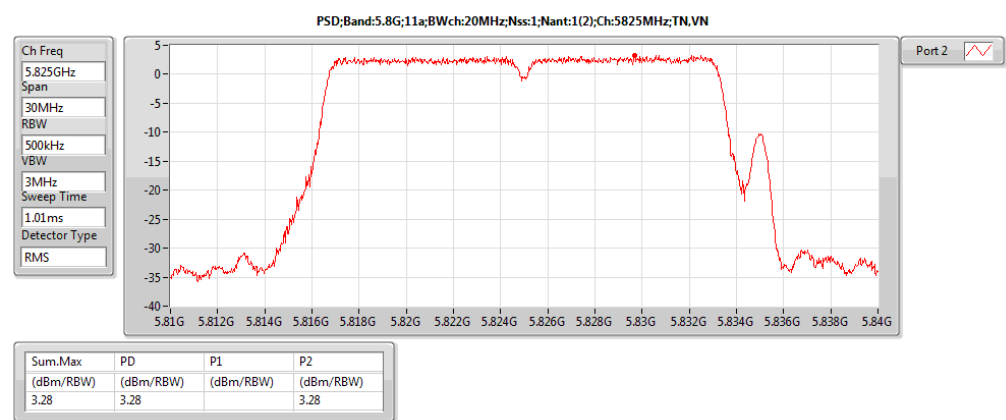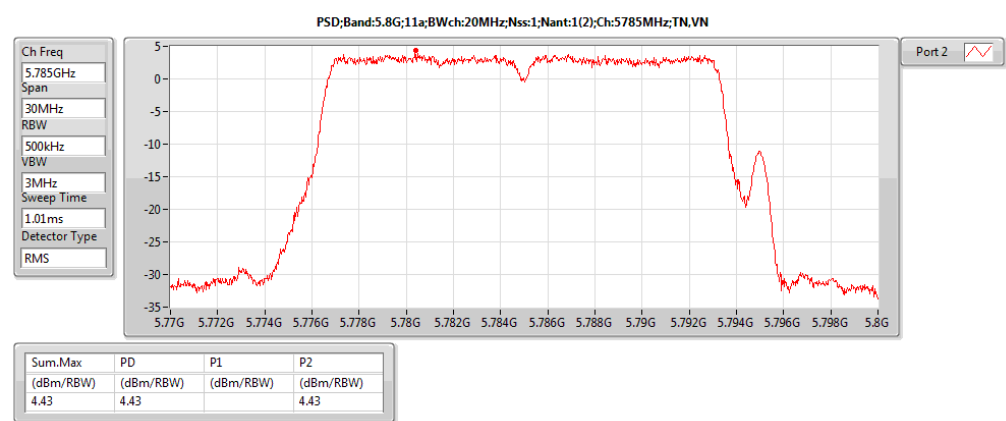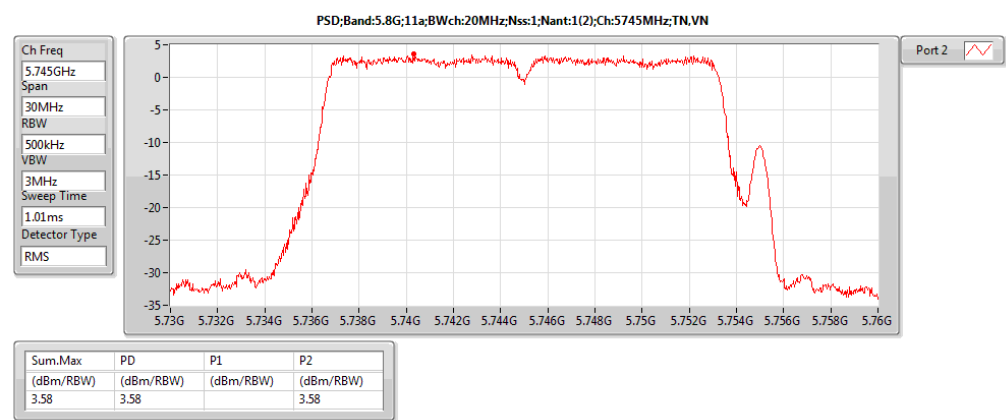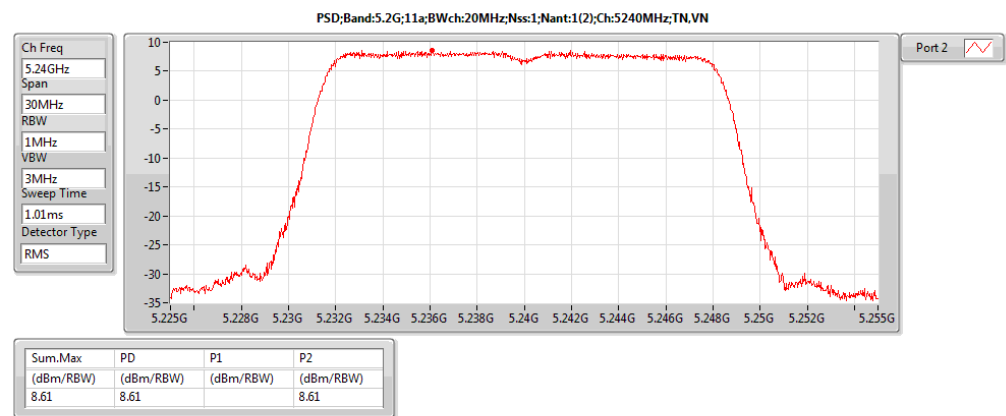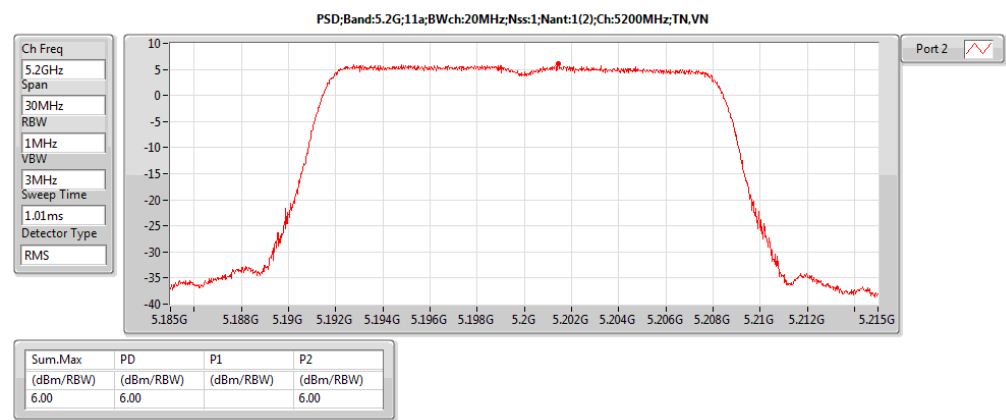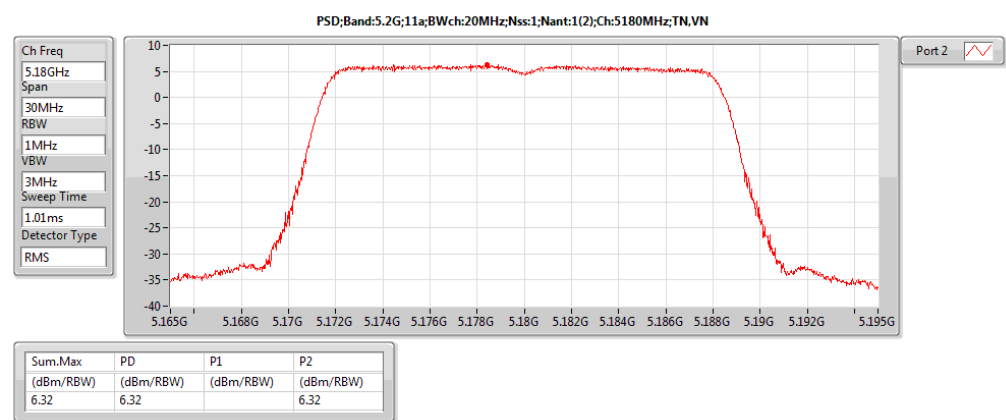

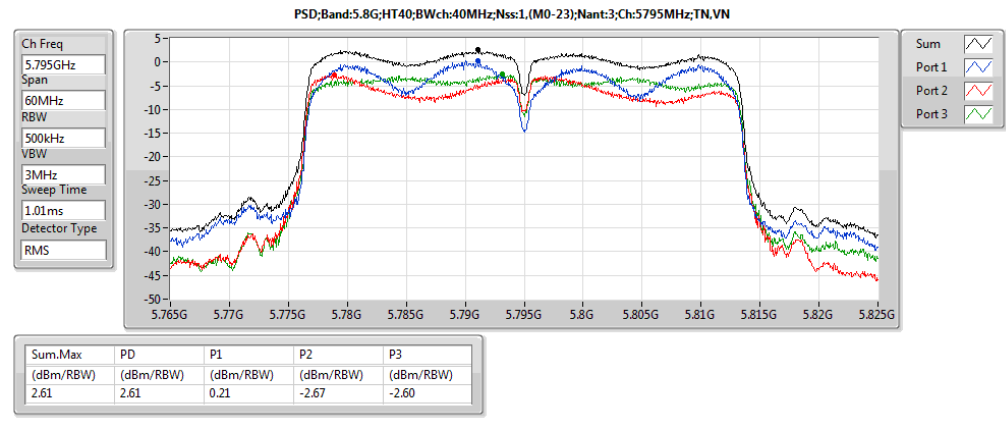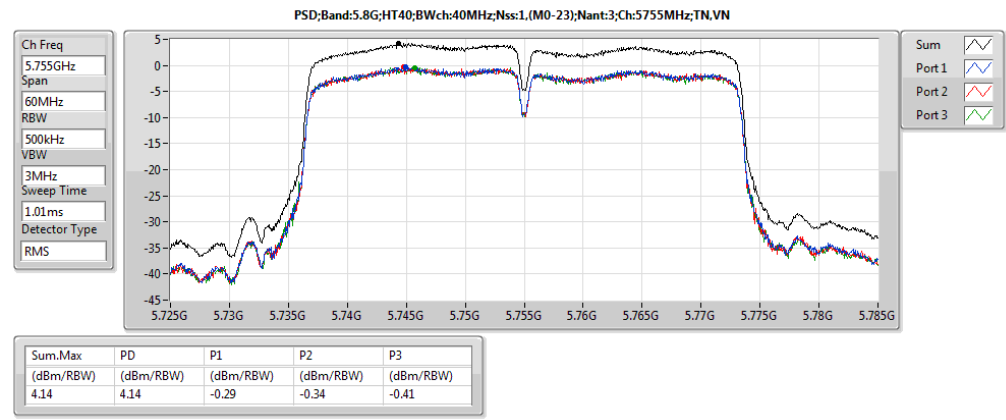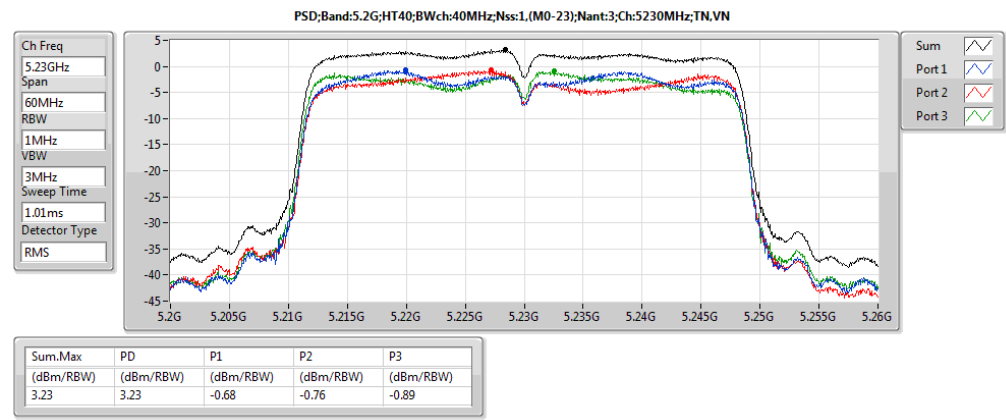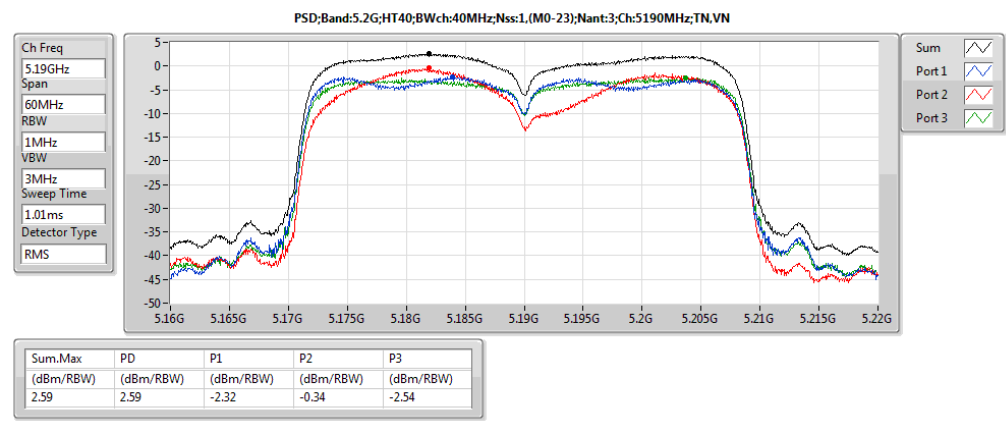



Summary

| Mode                                  | Result | F-Start<br>(Hz) | F-Stop<br>(Hz) | RBW<br>(Hz) | Type | Freq<br>(Hz) | EIRP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | DG<br>(dBi) | Loss<br>(dB) | Refl<br>(dB) | Psum<br>(dBm) | P1<br>(dBm) | P2<br>(dBm) | P3<br>(dBm) |
|---------------------------------------|--------|-----------------|----------------|-------------|------|--------------|---------------|----------------|----------------|-------------|--------------|--------------|---------------|-------------|-------------|-------------|
| 5.2G;HT20;20;1,(M0-23);3;5200;M;TN,VN | Pass   | 5.11G           | 5.15G          | 1M          | AV   | 5.14792G     | -42.31        | -41.30         | -1.01          | 6.67        | 6.43         | 0.00         | -48.98        | -53.75      | -54.21      | -53.33      |
| 5.8G;HT20;20;1,(M0-23);3;5745;L;TN,VN | Pass   | 1G              | 5.685G         | 1M          | AV   | 5.14154G     | -41.42        | -41.30         | -0.12          | 6.67        | 6.43         | 0.00         | -48.09        | -55.20      | -49.59      | -58.17      |
| 5.2G;HT20;20;1,(M0-23);3;5200;M;TN,VN | Pass   | 5.11G           | 5.15G          | 1M          | AV   | 5.14792G     | -42.31        | -41.30         | -1.01          | 6.67        | 6.43         | 0.00         | -48.98        | -53.75      | -54.21      | -53.33      |
| 5.8G;HT20;20;1,(M0-23);3;5745;L;TN,VN | Pass   | 1G              | 5.685G         | 1M          | AV   | 5.14154G     | -41.42        | -41.30         | -0.12          | 6.67        | 6.43         | 0.00         | -48.09        | -55.20      | -49.59      | -58.17      |
| 5.2G;HT20;20;1,(M0-23);3;5200;M;TN,VN | Pass   | 5.11G           | 5.15G          | 1M          | AV   | 5.14792G     | -42.31        | -41.30         | -1.01          | 6.67        | 6.43         | 0.00         | -48.98        | -53.75      | -54.21      | -53.33      |
| 5.8G;HT20;20;1,(M0-23);3;5745;L;TN,VN | Pass   | 1G              | 5.685G         | 1M          | AV   | 5.14154G     | -41.42        | -41.30         | -0.12          | 6.67        | 6.43         | 0.00         | -48.09        | -55.20      | -49.59      | -58.17      |












Result










| Mode                                  | Result | F-Start<br>(Hz) | F-Stop<br>(Hz) | RBW<br>(Hz) | Type | Freq<br>(Hz) | EIRP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | DG<br>(dBi) | Loss<br>(dB) | Refl<br>(dB) | Psum<br>(dBm) | P1<br>(dBm) | P2<br>(dBm) | P3<br>(dBm) |
|---------------------------------------|--------|-----------------|----------------|-------------|------|--------------|---------------|----------------|----------------|-------------|--------------|--------------|---------------|-------------|-------------|-------------|
| 5.2G;11a;20;1;1(2);5180;L;TN,VN       | Pass   | 1G              | 5.11G          | 1M          | PK   | 4.40308G     | -48.58        | -27.00         | -21.58         | 2.00        | 6.10         | 0.00         | -50.58        | -           | -50.58      |             |
| 5.2G;11a;20;1;1(2);5180;L;TN,VN       | Pass   | 5.11G           | 5.15G          | 1M          | PK   | 5.14936G     | -26.28        | -21.30         | -4.98          | 2.00        | 6.43         | 0.00         | -28.28        | -           | -28.28      |             |
| 5.2G;11a;20;1;1(2);5180;L;TN,VN       | Pass   | 5.35G           | 5.39G          | 1M          | PK   | 5.36088G     | -39.22        | -21.30         | -17.92         | 2.00        | 6.54         | 0.00         | -41.22        | -           | -41.22      |             |
| 5.2G;11a;20;1;1(2);5180;L;TN,VN       | Pass   | 5.39G           | 7G             | 1M          | PK   | 5.661285G    | -39.20        | -27.00         | -12.20         | 2.00        | 6.74         | 0.00         | -41.20        | -           | -41.20      |             |
| 5.2G;11a;20;1;1(2);5180;L;TN,VN       | Pass   | 1G              | 5.11G          | 1M          | AV   | 5.11G        | -52.42        | -41.30         | -11.12         | 2.00        | 6.42         | 0.00         | -54.42        | -           | -54.42      |             |
| 5.2G;11a;20;1;1(2);5180;L;TN,VN       | Pass   | 5.11G           | 5.15G          | 1M          | AV   | 5.12792G     | -43.21        | -41.30         | -1.91          | 2.00        | 6.42         | 0.00         | -45.21        | -           | -45.21      |             |
| 5.2G;11a;20;1;1(2);5180;L;TN,VN       | Pass   | 5.35G           | 5.39G          | 1M          | AV   | 5.3828G      | -51.29        | -41.30         | -9.99          | 2.00        | 6.55         | 0.00         | -53.29        | -           | -53.29      |             |
| 5.2G;11a;20;1;1(2);5180;L;TN,VN       | Pass   | 5.39G           | 7G             | 1M          | AV   | 5.45601G     | -51.04        | -41.30         | -9.74          | 2.00        | 6.59         | 0.00         | -53.04        | -           | -53.04      |             |
| 5.2G;11a;20;1;1(2);5200;M;TN,VN       | Pass   | 1G              | 5.11G          | 1M          | PK   | 5.11G        | -41.36        | -21.30         | -20.06         | 2.00        | 6.42         | 0.00         | -43.36        | -           | -43.36      |             |
| 5.2G;11a;20;1;1(2);5200;M;TN,VN       | Pass   | 5.11G           | 5.15G          | 1M          | PK   | 5.14736G     | -31.70        | -21.30         | -10.40         | 2.00        | 6.43         | 0.00         | -33.70        | -           | -33.70      |             |
| 5.2G;11a;20;1;1(2);5200;M;TN,VN       | Pass   | 5.35G           | 5.39G          | 1M          | PK   | 5.37344G     | -40.10        | -21.30         | -18.80         | 2.00        | 6.54         | 0.00         | -42.10        | -           | -42.10      |             |
| 5.2G;11a;20;1;1(2);5200;M;TN,VN       | Pass   | 5.39G           | 7G             | 1M          | PK   | 5.638745G    | -38.11        | -27.00         | -11.11         | 2.00        | 6.72         | 0.00         | -40.11        | -           | -40.11      |             |
| 5.2G;11a;20;1;1(2);5200;M;TN,VN       | Pass   | 1G              | 5.11G          | 1M          | AV   | 1G           | -50.03        | -41.30         | -8.73          | 2.00        | 4.94         | 0.00         | -52.03        | -           | -52.03      |             |
| 5.2G;11a;20;1;1(2);5200;M;TN,VN       | Pass   | 5.11G           | 5.15G          | 1M          | AV   | 5.1472G      | -42.47        | -41.30         | -1.17          | 2.00        | 6.43         | 0.00         | -44.47        | -           | -44.47      |             |
| 5.2G;11a;20;1;1(2);5200;M;TN,VN       | Pass   | 5.35G           | 5.39G          | 1M          | AV   | 5.3828G      | -51.59        | -41.30         | -10.29         | 2.00        | 6.55         | 0.00         | -53.59        | -           | -53.59      |             |
| 5.2G;11a;20;1;1(2);5200;M;TN,VN       | Pass   | 5.39G           | 7G             | 1M          | AV   | 5.456815G    | -51.39        | -41.30         | -10.09         | 2.00        | 6.59         | 0.00         | -53.39        | -           | -53.39      |             |
| 5.2G;11a;20;1;1(2);5240;H;TN,VN       | Pass   | 1G              | 5.11G          | 1M          | PK   | 5.11G        | -39.29        | -21.30         | -17.99         | 2.00        | 6.42         | 0.00         | -41.29        | -           | -41.29      |             |
| 5.2G;11a;20;1;1(2);5240;H;TN,VN       | Pass   | 5.11G           | 5.15G          | 1M          | PK   | 5.1496G      | -34.69        | -21.30         | -13.39         | 2.00        | 6.43         | 0.00         | -36.69        | -           | -36.69      |             |
| 5.2G;11a;20;1;1(2);5240;H;TN,VN       | Pass   | 5.35G           | 5.39G          | 1M          | PK   | 5.37272G     | -36.61        | -21.30         | -15.31         | 2.00        | 6.54         | 0.00         | -38.61        | -           | -38.61      |             |
| 5.2G;11a;20;1;1(2);5240;H;TN,VN       | Pass   | 5.39G           | 7G             | 1M          | PK   | 5.546975G    | -36.19        | -27.00         | -9.19          | 2.00        | 6.66         | 0.00         | -38.19        | -           | -38.19      |             |
| 5.2G;11a;20;1;1(2);5240;H;TN,VN       | Pass   | 1G              | 5.11G          | 1M          | AV   | 1.03288G     | -43.21        | -41.30         | -1.91          | 2.00        | 4.95         | 0.00         | -45.21        | -           | -45.21      |             |
| 5.2G;11a;20;1;1(2);5240;H;TN,VN       | Pass   | 5.11G           | 5.15G          | 1M          | AV   | 5.14904G     | -46.20        | -41.30         | -4.90          | 2.00        | 6.43         | 0.00         | -48.20        | -           | -48.20      |             |
| 5.2G;11a;20;1;1(2);5240;H;TN,VN       | Pass   | 5.35G           | 5.39G          | 1M          | AV   | 5.36952G     | -48.60        | -41.30         | -7.30          | 2.00        | 6.54         | 0.00         | -50.60        | -           | -50.60      |             |
| 5.2G;11a;20;1;1(2);5240;H;TN,VN       | Pass   | 5.39G           | 7G             | 1M          | AV   | 5.458425G    | -48.13        | -41.30         | -6.83          | 2.00        | 6.60         | 0.00         | -50.13        | -           | -50.13      |             |
| 5.8G;11a;20;1;1(2);5745;L;TN,VN       | Pass   | 1G              | 5.685G         | 1M          | PK   | 5.58193G     | -32.35        | -27.00         | -5.35          | 2.00        | 6.68         | 0.00         | -34.35        | -           | -34.35      |             |
| 5.8G;11a;20;1;1(2);5745;L;TN,VN       | Pass   | 5.685G          | 5.725G         | 1M          | PK   | 5.69212G     | -31.00        | -27.00         | -4.00          | 2.00        | 6.77         | 0.00         | -33.00        | -           | -33.00      |             |
| 5.8G;11a;20;1;1(2);5745;L;TN,VN       | Pass   | 5.85G           | 5.89G          | 1M          | PK   | 5.88904G     | -36.46        | -27.00         | -9.46          | 2.00        | 6.94         | 0.00         | -38.46        | -           | -38.46      |             |
| 5.8G;11a;20;1;1(2);5745;L;TN,VN       | Pass   | 5.89G           | 7G             | 1M          | PK   | 5.980465G    | -37.05        | -27.00         | -10.05         | 2.00        | 7.03         | 0.00         | -39.05        | -           | -39.05      |             |
| 5.8G;11a;20;1;1(2);5745;L;TN,VN       | Pass   | 1G              | 5.685G         | 1M          | AV   | 5.14154G     | -43.97        | -41.30         | -2.67          | 2.00        | 6.43         | 0.00         | -45.97        | -           | -45.97      |             |
| 5.8G;11a;20;1;1(2);5785;M;TN,VN       | Pass   | 1G              | 5.685G         | 1M          | PK   | 5.18839G     | -32.01        | -27.00         | -5.01          | 2.00        | 6.45         | 0.00         | -34.01        | -           | -34.01      |             |
| 5.8G;11a;20;1;1(2);5785;M;TN,VN       | Pass   | 5.685G          | 5.725G         | 1M          | PK   | 5.68796G     | -34.27        | -27.00         | -7.27          | 2.00        | 6.76         | 0.00         | -36.27        | -           | -36.27      |             |
| 5.8G;11a;20;1;1(2);5785;M;TN,VN       | Pass   | 5.85G           | 5.89G          | 1M          | PK   | 5.88608G     | -37.72        | -27.00         | -10.72         | 2.00        | 6.94         | 0.00         | -39.72        | -           | -39.72      |             |
| 5.8G;11a;20;1;1(2);5785;M;TN,VN       | Pass   | 5.89G           | 7G             | 1M          | PK   | 5.958265G    | -35.67        | -27.00         | -8.67          | 2.00        | 7.00         | 0.00         | -37.67        | -           | -37.67      |             |
| 5.8G;11a;20;1;1(2);5785;M;TN,VN       | Pass   | 1G              | 5.685G         | 1M          | AV   | 5.14154G     | -44.00        | -41.30         | -2.70          | 2.00        | 6.43         | 0.00         | -46.00        | -           | -46.00      |             |
| 5.8G;11a;20;1;1(2);5825;H;TN,VN       | Pass   | 1G              | 5.685G         | 1M          | PK   | 5.16965G     | -30.24        | -27.00         | -3.24          | 2.00        | 6.44         | 0.00         | -32.24        | -           | -32.24      |             |
| 5.8G;11a;20;1;1(2);5825;H;TN,VN       | Pass   | 5.685G          | 5.725G         | 1M          | PK   | 5.70116G     | -34.17        | -27.00         | -7.17          | 2.00        | 6.77         | 0.00         | -36.17        | -           | -36.17      |             |
| 5.8G;11a;20;1;1(2);5825;H;TN,VN       | Pass   | 5.85G           | 5.89G          | 1M          | PK   | 5.87744G     | -33.18        | -27.00         | -6.18          | 2.00        | 6.93         | 0.00         | -35.18        | -           | -35.18      |             |
| 5.8G;11a;20;1;1(2);5825;H;TN,VN       | Pass   | 5.89G           | 7G             | 1M          | PK   | 5.95327G     | -36.48        | -27.00         | -9.48          | 2.00        | 7.00         | 0.00         | -38.48        | -           | -38.48      |             |
| 5.8G;11a;20;1;1(2);5825;H;TN,VN       | Pass   | 1G              | 5.685G         | 1M          | AV   | 5.14154G     | -42.54        | -41.30         | -1.24          | 2.00        | 6.43         | 0.00         | -44.54        | -           | -44.54      |             |
| 5.2G;HT20;20;1;(M0-23);3;5180;L;TN,VN | Pass   | 1G              | 5.11G          | 1M          | PK   | 4.40308G     | -40.22        | -27.00         | -13.22         | 6.67        | 6.10         | 0.00         | -46.89        | -51.82      | -50.88      | -52.43      |
| 5.2G;HT20;20;1;(M0-23);3;5180;L;TN,VN | Pass   | 5.11G           | 5.15G          | 1M          | PK   | 5.1276G      | -31.07        | -21.30         | -9.77          | 6.67        | 6.42         | 0.00         | -37.74        | -42.37      | -43.00      | -42.20      |
| 5.2G;HT20;20;1;(M0-23);3;5180;L;TN,VN | Pass   | 5.35G           | 5.39G          | 1M          | PK   | 5.38832G     | -33.67        | -21.30         | -12.37         | 6.67        | 6.55         | 0.00         | -40.34        | -45.65      | -45.07      | -44.67      |
| 5.2G;HT20;20;1;(M0-23);3;5180;L;TN,VN | Pass   | 5.39G           | 7G             | 1M          | PK   | 5.621035G    | -32.85        | -27.00         | -5.85          | 6.67        | 6.71         | 0.00         | -39.52        | -43.73      | -44.76      | -44.45      |
| 5.2G;HT20;20;1;(M0-23);3;5180;L;TN,VN | Pass   | 1G              | 5.11G          | 1M          | AV   | 5.11G        | -48.96        | -41.30         | -7.66          | 6.67        | 6.42         | 0.00         | -55.63        | -60.58      | -59.45      | -61.38      |
| 5.2G;HT20;20;1;(M0-23);3;5180;L;TN,VN | Pass   | 5.11G           | 5.15G          | 1M          | AV   | 5.128G       | -42.46        | -41.30         | -1.16          | 6.67        | 6.42         | 0.00         | -49.13        | -52.55      | -55.31      | -54.30      |
| 5.2G;HT20;20;1;(M0-23);3;5180;L;TN,VN | Pass   | 5.35G           | 5.39G          | 1M          | AV   | 5.37712G     | -46.19        | -41.30         | -4.89          | 6.67        | 6.55         | 0.00         | -52.86        | -56.69      | -59.37      | -57.28      |
| 5.2G;HT20;20;1;(M0-23);3;5180;L;TN,VN | Pass   | 5.39G           | 7G             | 1M          | AV   | 5.398855G    | -46.03        | -41.30         | -4.73          | 6.67        | 6.56         | 0.00         | -52.70        | -57.50      | -59.60      | -56.02      |
| 5.2G;HT20;20;1;(M0-23);3;5200;M;TN,VN | Pass   | 1G              | 5.11G          | 1M          | PK   | 4.4524G      | -40.20        | -27.00         | -13.20         | 6.67        | 6.12         | 0.00         | -46.87        | -50.96      | -51.80      | -52.25      |
| 5.2G;HT20;20;1;(M0-23);3;5200;M;TN,VN | Pass   | 5.11G           | 5.15G          | 1M          | PK   | 5.14728G     | -31.22        | -21.30         | -9.92          | 6.67        | 6.43         | 0.00         | -37.89        | -43.35      | -42.26      | -42.44      |
| 5.2G;HT20;20;1;(M0-23);3;5200;M;TN,VN | Pass   | 5.35G           | 5.39G          | 1M          | PK   | 5.38552G     | -34.27        | -21.30         | -12.97         | 6.67        | 6.55         | 0.00         | -40.94        | -44.15      | -47.05      | -46.52      |
| 5.2G;HT20;20;1;(M0-23);3;5200;M;TN,VN | Pass   | 5.39G           | 7G             | 1M          | PK   | 5.60896G     | -32.64        | -27.00         | -5.64          | 6.67        | 6.70         | 0.00         | -39.31        | -42.18      | -45.81      | -45.16      |
| 5.2G;HT20;20;1;(M0-23);3;5200;M;TN,VN | Pass   | 1G              | 5.11G          | 1M          | AV   | 5.11G        | -48.85        | -41.30         | -7.55          | 6.67        | 6.42         | 0.00         | -55.52        | -60.45      | -59.36      | -61.26      |
| 5.2G;HT20;20;1;(M0-23);3;5200;M;TN,VN | Pass   | 5.11G           | 5.15G          | 1M          | AV   | 5.14792G     | -42.31        | -41.30         | -1.01          | 6.67        | 6.43         | 0.00         | -48.98        | -53.75      | -54.21      | -53.33      |
| 5.2G;HT20;20;1;(M0-23);3;5200;M;TN,VN | Pass   | 5.35G           | 5.39G          | 1M          | AV   | 5.38968G     | -46.52        | -41.30         | -5.22          | 6.67        | 6.55         | 0.00         | -53.19        | -58.47      | -58.63      | -56.97      |
| 5.2G;HT20;20;1;(M0-23);3;5200;M;TN,VN | Pass   | 5.39G           | 7G             | 1M          | AV   | 5.45923G     | -45.83        | -41.30         | -4.53          | 6.67        | 6.60         | 0.00         | -52.50        | -56.82      | -57.71      | -57.32      |
| 5.2G;HT20;20;1;(M0-23);3;5240;H;TN,VN | Pass   | 1G              | 5.11G          | 1M          | PK   | 4.44418G     | -40.40        | -27.00         | -13.40         | 6.67        | 6.12         | 0.00         | -47.07        | -51.65      | -52.16      | -51.72      |
| 5.2G;HT20;20;1;(M0-23);3;5240;H;TN,VN | Pass   | 5.11G           | 5.15G          | 1M          | PK   | 5.14704G     | -34.17        | -21.30         | -12.87         | 6.67        | 6.43         | 0.00         | -40.84        | -45.80      | -44.58      | -46.73      |
| 5.2G;HT20;20;1;(M0-23);3;5240;H;TN,VN | Pass   | 5.35G           | 5.39G          | 1M          | PK   | 5.37368G     | -33.85        | -21.30         | -12.55         | 6.67        | 6.54         | 0.00         | -40.52        | -44.63      | -46.50      | -44.96      |
| 5.2G;HT20;20;1;(M0-23);3;5240;H;TN,VN | Pass   | 5.39G           | 7G             | 1M          | PK   | 5.79894G     | -31.06        | -27.00         | -4.06          | 6.67        | 6.86         | 0.00         | -37.73        | -39.02      | -47.97      | -45.64      |
| 5.2G;HT20;20;1;(M0-23);3;5240;H;TN,VN | Pass   | 1G              | 5.11G          | 1M          | AV   | 5.11G        | -48.72        | -41.30         | -7.42          | 6.67        | 6.42         | 0.00         | -55.39        | -59.88      | -59.34      | -61.58      |
| 5.2G;HT20;20;1;(M0-23);3;5240;H;TN,VN | Pass   | 5.11G           | 5.15G          | 1M          | AV   | 5.148G       | -47.12        | -41.30         | -5.82          | 6.67        | 6.43         | 0.00         | -53.79        | -59.03      | -57.11      | -60.07      |



| Mode                                  | Result | F-Start<br>(Hz) | F-Stop<br>(Hz) | RBW<br>(Hz) | Type | Freq<br>(Hz) | EIRP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | DG<br>(dBi) | Loss<br>(dB) | Refl<br>(dB) | Psum<br>(dBm) | P1<br>(dBm) | P2<br>(dBm) | P3<br>(dBm) |
|---------------------------------------|--------|-----------------|----------------|-------------|------|--------------|---------------|----------------|----------------|-------------|--------------|--------------|---------------|-------------|-------------|-------------|
| 5.2G;HT20;20;1,(M0-23);3;5240;H;TN,VN | Pass   | 5.35G           | 5.39G          | 1M          | AV   | 5.37792G     | -46.04        | -41.30         | -4.74          | 6.67        | 6.55         | 0.00         | -52.71        | -57.24      | -58.97      | -56.58      |
| 5.2G;HT20;20;1,(M0-23);3;5240;H;TN,VN | Pass   | 5.39G           | 7G             | 1M          | AV   | 5.4383G      | -45.91        | -41.30         | -4.61          | 6.67        | 6.58         | 0.00         | -52.58        | -57.43      | -57.96      | -56.75      |
| 5.8G;HT20;20;1,(M0-23);3;5745;L;TN,VN | Pass   | 1G              | 5.685G         | 1M          | PK   | 5.20713G     | -28.81        | -27.00         | -1.81          | 6.67        | 6.46         | 0.00         | -35.48        | -41.32      | -37.45      | -45.31      |
| 5.8G;HT20;20;1,(M0-23);3;5745;L;TN,VN | Pass   | 5.685G          | 5.725G         | 1M          | PK   | 5.69292G     | -27.27        | -27.00         | -0.27          | 6.67        | 6.77         | 0.00         | -33.94        | -41.29      | -35.61      | -42.67      |
| 5.8G;HT20;20;1,(M0-23);3;5745;L;TN,VN | Pass   | 5.85G           | 5.89G          | 1M          | PK   | 5.87488G     | -31.57        | -27.00         | -4.57          | 6.67        | 6.93         | 0.00         | -38.24        | -45.88      | -43.29      | -41.12      |
| 5.8G;HT20;20;1,(M0-23);3;5745;L;TN,VN | Pass   | 5.89G           | 7G             | 1M          | PK   | 5.98546G     | -32.23        | -27.00         | -5.23          | 6.67        | 7.03         | 0.00         | -38.90        | -48.53      | -40.28      | -46.78      |
| 5.8G;HT20;20;1,(M0-23);3;5745;L;TN,VN | Pass   | 1G              | 5.685G         | 1M          | AV   | 5.14154G     | -41.42        | -41.30         | -0.12          | 6.67        | 6.43         | 0.00         | -48.09        | -55.20      | -49.59      | -58.17      |
| 5.8G;HT20;20;1,(M0-23);3;5785;M;TN,VN | Pass   | 1G              | 5.685G         | 1M          | PK   | 5.62878G     | -29.47        | -27.00         | -2.47          | 6.67        | 6.72         | 0.00         | -36.14        | -42.36      | -38.42      | -43.82      |
| 5.8G;HT20;20;1,(M0-23);3;5785;M;TN,VN | Pass   | 5.685G          | 5.725G         | 1M          | PK   | 5.6882G      | -29.11        | -27.00         | -2.11          | 6.67        | 6.76         | 0.00         | -35.78        | -41.95      | -38.00      | -43.82      |
| 5.8G;HT20;20;1,(M0-23);3;5785;M;TN,VN | Pass   | 5.85G           | 5.89G          | 1M          | PK   | 5.88992G     | -31.82        | -27.00         | -4.82          | 6.67        | 6.94         | 0.00         | -38.49        | -44.98      | -41.57      | -43.98      |
| 5.8G;HT20;20;1,(M0-23);3;5785;M;TN,VN | Pass   | 5.89G           | 7G             | 1M          | PK   | 5.98879G     | -33.08        | -27.00         | -6.08          | 6.67        | 7.03         | 0.00         | -39.75        | -49.87      | -41.44      | -46.24      |
| 5.8G;HT20;20;1,(M0-23);3;5785;M;TN,VN | Pass   | 1G              | 5.685G         | 1M          | AV   | 5.14154G     | -41.76        | -41.30         | -0.46          | 6.67        | 6.43         | 0.00         | -48.43        | -55.10      | -50.15      | -57.92      |
| 5.8G;HT20;20;1,(M0-23);3;5825;H;TN,VN | Pass   | 1G              | 5.685G         | 1M          | PK   | 5.61941G     | -29.49        | -27.00         | -2.49          | 6.67        | 6.71         | 0.00         | -36.16        | -42.11      | -38.97      | -42.68      |
| 5.8G;HT20;20;1,(M0-23);3;5825;H;TN,VN | Pass   | 5.685G          | 5.725G         | 1M          | PK   | 5.6938G      | -29.61        | -27.00         | -2.61          | 6.67        | 6.77         | 0.00         | -36.28        | -39.98      | -42.03      | -41.41      |
| 5.8G;HT20;20;1,(M0-23);3;5825;H;TN,VN | Pass   | 5.85G           | 5.89G          | 1M          | PK   | 5.8772G      | -30.34        | -27.00         | -3.34          | 6.67        | 6.93         | 0.00         | -37.01        | -45.64      | -38.54      | -44.99      |
| 5.8G;HT20;20;1,(M0-23);3;5825;H;TN,VN | Pass   | 5.89G           | 7G             | 1M          | PK   | 5.978245G    | -33.00        | -27.00         | -6.00          | 6.67        | 7.02         | 0.00         | -39.67        | -48.21      | -42.03      | -45.23      |
| 5.8G;HT20;20;1,(M0-23);3;5825;H;TN,VN | Pass   | 1G              | 5.685G         | 1M          | AV   | 5.14154G     | -41.47        | -41.30         | -0.17          | 6.67        | 6.43         | 0.00         | -48.14        | -55.42      | -49.67      | -57.68      |
| 5.2G;HT40;40;1,(M0-23);3;5190;L;TN,VN | Pass   | 1G              | 5.07G          | 1M          | PK   | 4.49206G     | -40.28        | -27.00         | -13.28         | 6.67        | 6.14         | 0.00         | -46.95        | -53.00      | -51.32      | -51.08      |
| 5.2G;HT40;40;1,(M0-23);3;5190;L;TN,VN | Pass   | 5.07G           | 5.15G          | 1M          | PK   | 5.14856G     | -31.02        | -21.30         | -9.72          | 6.67        | 6.43         | 0.00         | -37.69        | -43.32      | -43.13      | -41.26      |
| 5.2G;HT40;40;1,(M0-23);3;5190;L;TN,VN | Pass   | 5.35G           | 5.43G          | 1M          | PK   | 5.38776G     | -32.57        | -21.30         | -11.27         | 6.67        | 6.55         | 0.00         | -39.24        | -42.15      | -46.60      | -44.41      |
| 5.2G;HT40;40;1,(M0-23);3;5190;L;TN,VN | Pass   | 5.43G           | 7G             | 1M          | PK   | 5.70004G     | -31.34        | -27.00         | -4.34          | 6.67        | 6.77         | 0.00         | -38.01        | -40.48      | -45.52      | -43.91      |
| 5.2G;HT40;40;1,(M0-23);3;5190;L;TN,VN | Pass   | 1G              | 5.07G          | 1M          | AV   | 5.07G        | -49.20        | -41.30         | -7.90          | 6.67        | 6.40         | 0.00         | -55.87        | -58.98      | -61.29      | -62.38      |
| 5.2G;HT40;40;1,(M0-23);3;5190;L;TN,VN | Pass   | 5.07G           | 5.15G          | 1M          | AV   | 5.14968G     | -42.79        | -41.30         | -1.49          | 6.67        | 6.43         | 0.00         | -49.46        | -54.35      | -54.94      | -53.51      |
| 5.2G;HT40;40;1,(M0-23);3;5190;L;TN,VN | Pass   | 5.35G           | 5.43G          | 1M          | AV   | 5.38408G     | -44.57        | -41.30         | -3.27          | 6.67        | 6.55         | 0.00         | -51.24        | -53.95      | -58.97      | -56.53      |
| 5.2G;HT40;40;1,(M0-23);3;5190;L;TN,VN | Pass   | 5.43G           | 7G             | 1M          | AV   | 5.44256G     | -44.66        | -41.30         | -3.36          | 6.67        | 6.59         | 0.00         | -51.33        | -54.27      | -57.84      | -57.07      |
| 5.2G;HT40;40;1,(M0-23);3;5230;H;TN,VN | Pass   | 1G              | 5.07G          | 1M          | PK   | 4.49206G     | -40.34        | -27.00         | -13.34         | 6.67        | 6.14         | 0.00         | -47.01        | -51.26      | -51.41      | -52.84      |
| 5.2G;HT40;40;1,(M0-23);3;5230;H;TN,VN | Pass   | 5.07G           | 5.15G          | 1M          | PK   | 5.12616G     | -31.70        | -21.30         | -10.40         | 6.67        | 6.42         | 0.00         | -38.37        | -41.21      | -44.41      | -44.74      |
| 5.2G;HT40;40;1,(M0-23);3;5230;H;TN,VN | Pass   | 5.35G           | 5.43G          | 1M          | PK   | 5.42808G     | -32.38        | -21.30         | -11.08         | 6.67        | 6.58         | 0.00         | -39.05        | -41.25      | -47.12      | -45.21      |
| 5.2G;HT40;40;1,(M0-23);3;5230;H;TN,VN | Pass   | 5.43G           | 7G             | 1M          | PK   | 5.70161G     | -30.75        | -27.00         | -3.75          | 6.67        | 6.78         | 0.00         | -37.42        | -39.67      | -45.10      | -43.72      |
| 5.2G;HT40;40;1,(M0-23);3;5230;H;TN,VN | Pass   | 1G              | 5.07G          | 1M          | AV   | 5.07G        | -49.42        | -41.30         | -8.12          | 6.67        | 6.40         | 0.00         | -56.09        | -58.97      | -61.96      | -62.56      |
| 5.2G;HT40;40;1,(M0-23);3;5230;H;TN,VN | Pass   | 5.07G           | 5.15G          | 1M          | AV   | 5.12664G     | -43.21        | -41.30         | -1.91          | 6.67        | 6.42         | 0.00         | -49.88        | -53.01      | -55.07      | -56.65      |
| 5.2G;HT40;40;1,(M0-23);3;5230;H;TN,VN | Pass   | 5.35G           | 5.43G          | 1M          | AV   | 5.38232G     | -44.43        | -41.30         | -3.13          | 6.67        | 6.55         | 0.00         | -51.10        | -53.49      | -57.73      | -57.92      |
| 5.2G;HT40;40;1,(M0-23);3;5230;H;TN,VN | Pass   | 5.43G           | 7G             | 1M          | AV   | 5.446485G    | -44.46        | -41.30         | -3.16          | 6.67        | 6.59         | 0.00         | -51.13        | -54.01      | -57.83      | -56.79      |
| 5.8G;HT40;40;1,(M0-23);3;5755;L;TN,VN | Pass   | 1G              | 5.645G         | 1M          | PK   | 5.62642G     | -29.79        | -27.00         | -2.79          | 6.67        | 6.72         | 0.00         | -36.46        | -40.28      | -40.80      | -43.10      |
| 5.8G;HT40;40;1,(M0-23);3;5755;L;TN,VN | Pass   | 5.645G          | 5.725G         | 1M          | PK   | 5.71428G     | -27.61        | -27.00         | -0.61          | 6.67        | 6.79         | 0.00         | -34.28        | -39.36      | -38.55      | -39.30      |
| 5.8G;HT40;40;1,(M0-23);3;5755;L;TN,VN | Pass   | 5.85G           | 5.93G          | 1M          | PK   | 5.8604G      | -31.06        | -27.00         | -4.06          | 6.67        | 6.91         | 0.00         | -37.73        | -42.10      | -43.25      | -42.23      |
| 5.8G;HT40;40;1,(M0-23);3;5755;L;TN,VN | Pass   | 5.93G           | 7G             | 1M          | PK   | 5.94284G     | -33.20        | -27.00         | -6.20          | 6.67        | 6.99         | 0.00         | -39.87        | -48.51      | -43.12      | -43.96      |
| 5.8G;HT40;40;1,(M0-23);3;5755;L;TN,VN | Pass   | 1G              | 5.645G         | 1M          | AV   | 5.39417G     | -42.54        | -41.30         | -1.24          | 6.67        | 6.56         | 0.00         | -49.21        | -54.97      | -51.74      | -56.71      |
| 5.8G;HT40;40;1,(M0-23);3;5795;H;TN,VN | Pass   | 1G              | 5.645G         | 1M          | PK   | 5.61713G     | -29.68        | -27.00         | -2.68          | 6.67        | 6.71         | 0.00         | -36.35        | -41.07      | -42.33      | -40.23      |
| 5.8G;HT40;40;1,(M0-23);3;5795;H;TN,VN | Pass   | 5.645G          | 5.725G         | 1M          | PK   | 5.69204G     | -27.33        | -27.00         | -0.33          | 6.67        | 6.77         | 0.00         | -34.00        | -38.33      | -40.54      | -37.88      |
| 5.8G;HT40;40;1,(M0-23);3;5795;H;TN,VN | Pass   | 5.85G           | 5.93G          | 1M          | PK   | 5.89944G     | -30.17        | -27.00         | -3.17          | 6.67        | 6.95         | 0.00         | -36.84        | -44.01      | -44.79      | -38.72      |
| 5.8G;HT40;40;1,(M0-23);3;5795;H;TN,VN | Pass   | 5.93G           | 7G             | 1M          | PK   | 5.953005G    | -32.94        | -27.00         | -5.94          | 6.67        | 7.00         | 0.00         | -39.61        | -49.92      | -46.13      | -41.26      |
| 5.8G;HT40;40;1,(M0-23);3;5795;H;TN,VN | Pass   | 1G              | 5.645G         | 1M          | AV   | 5.4592G      | -42.83        | -41.30         | -1.53          | 6.67        | 6.60         | 0.00         | -49.50        | -54.39      | -54.81      | -53.68      |




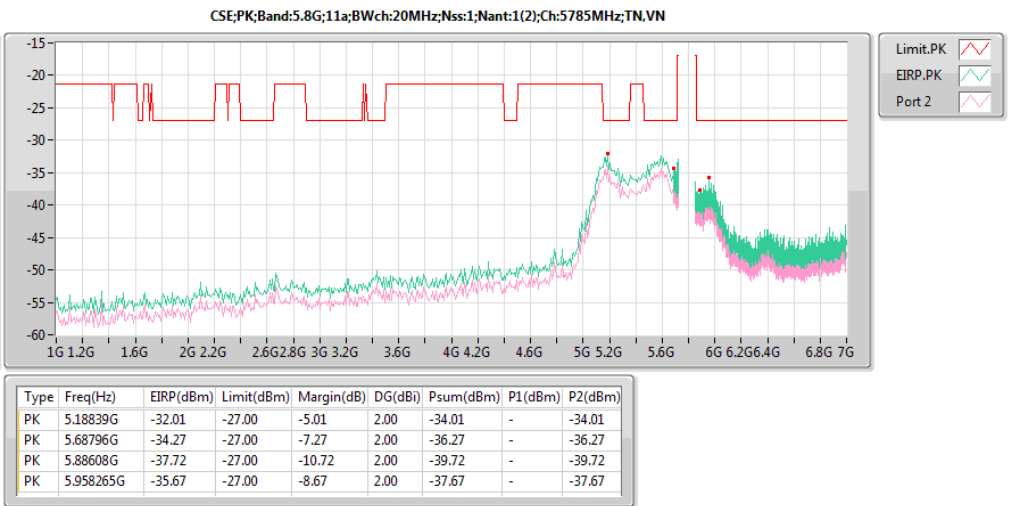
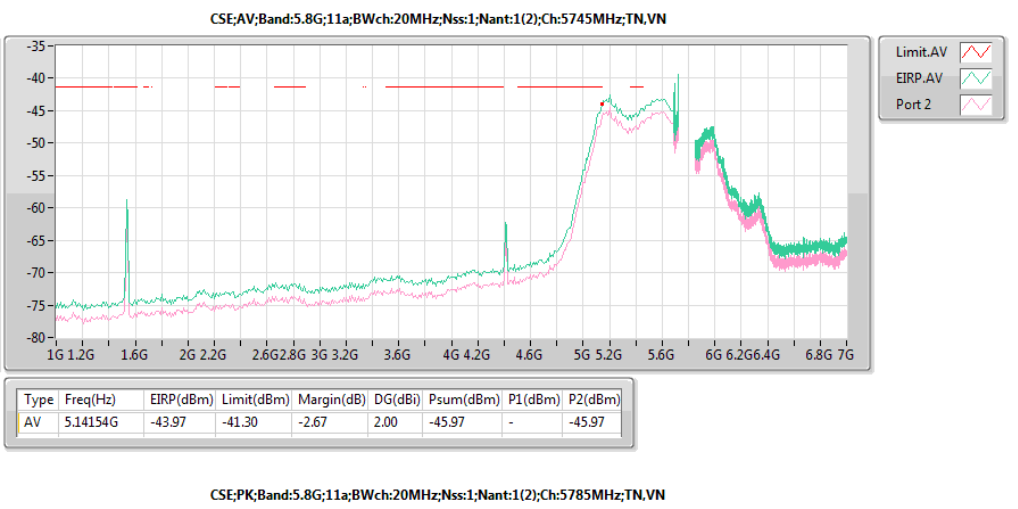
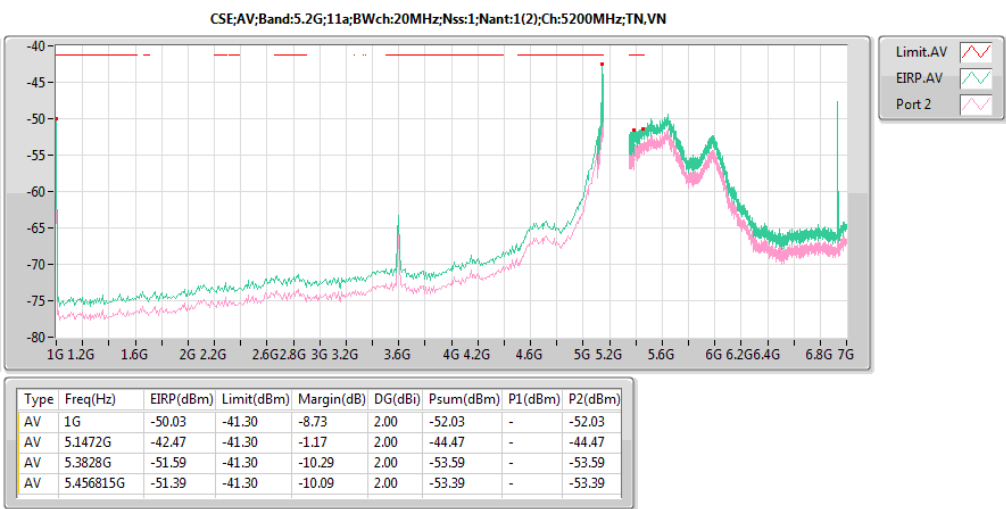
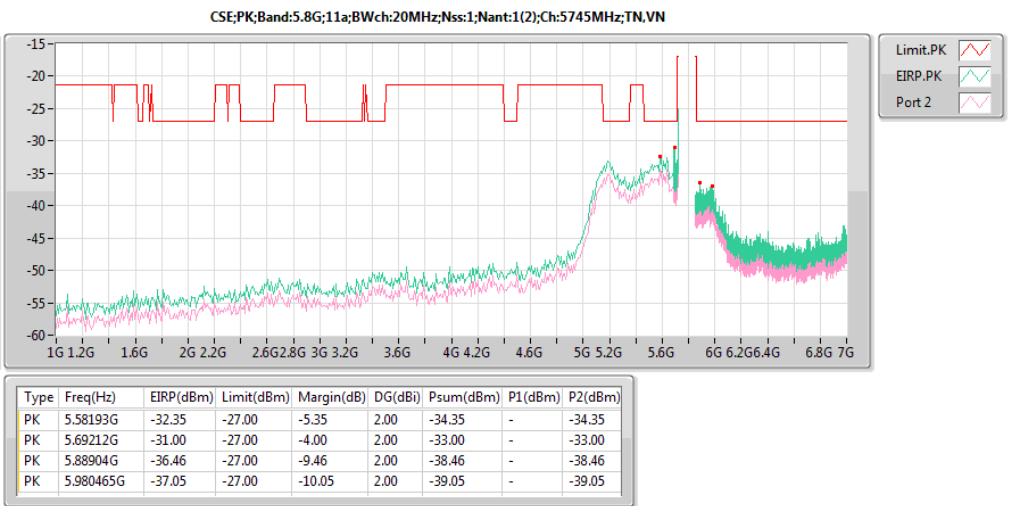
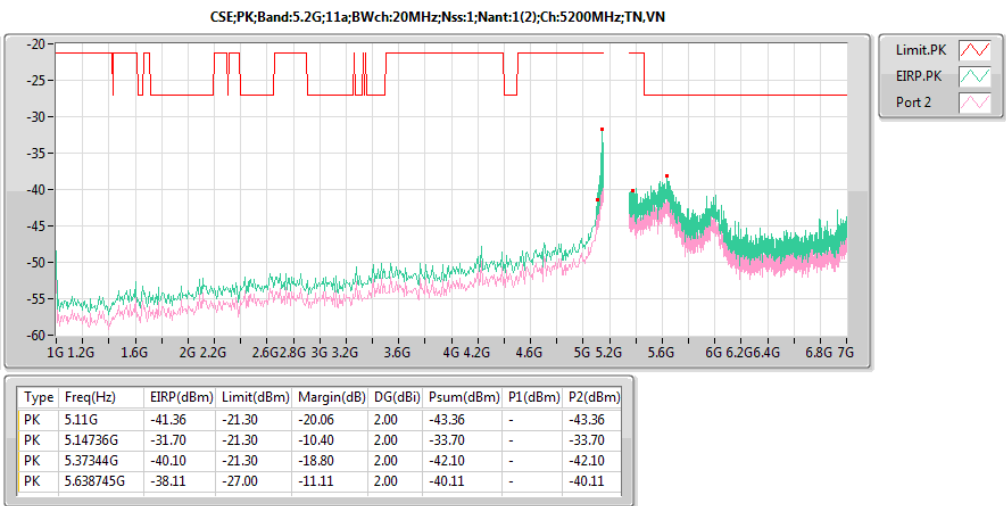
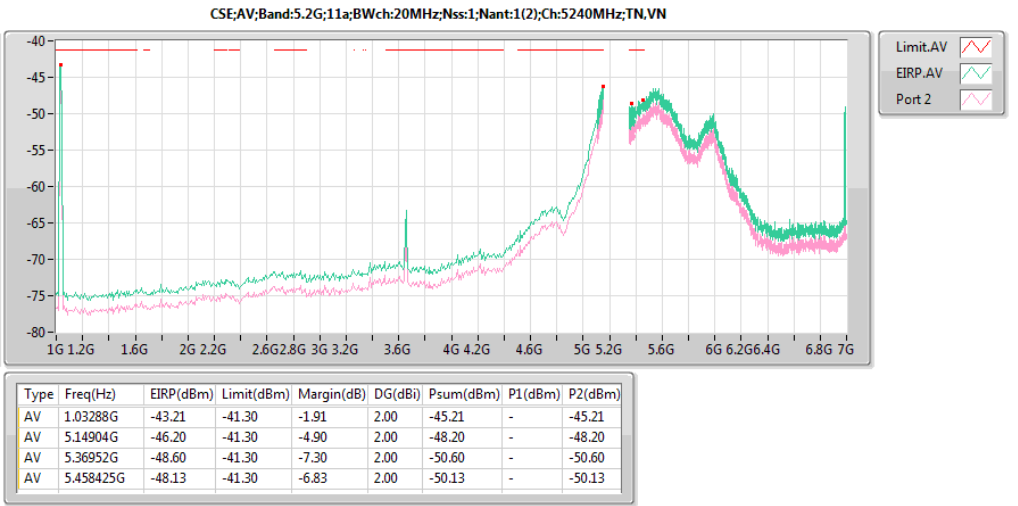
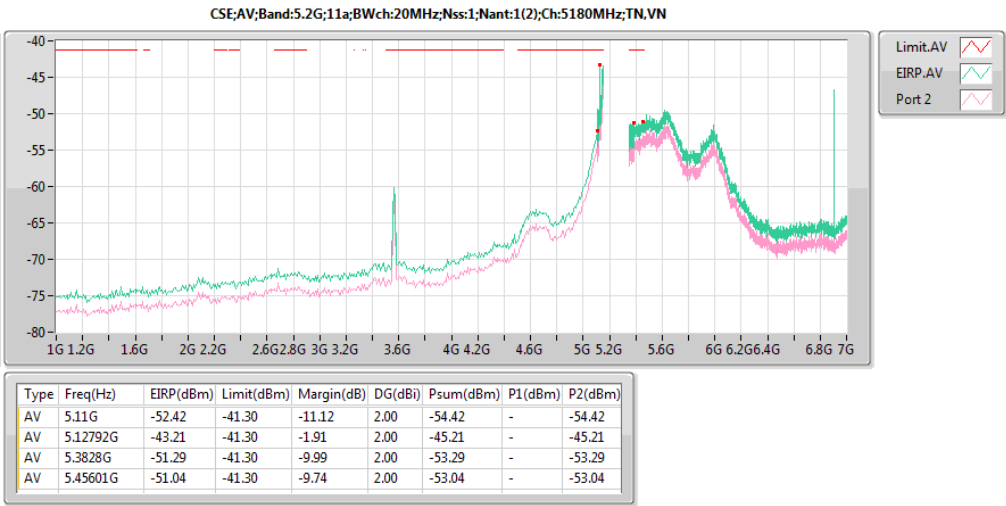
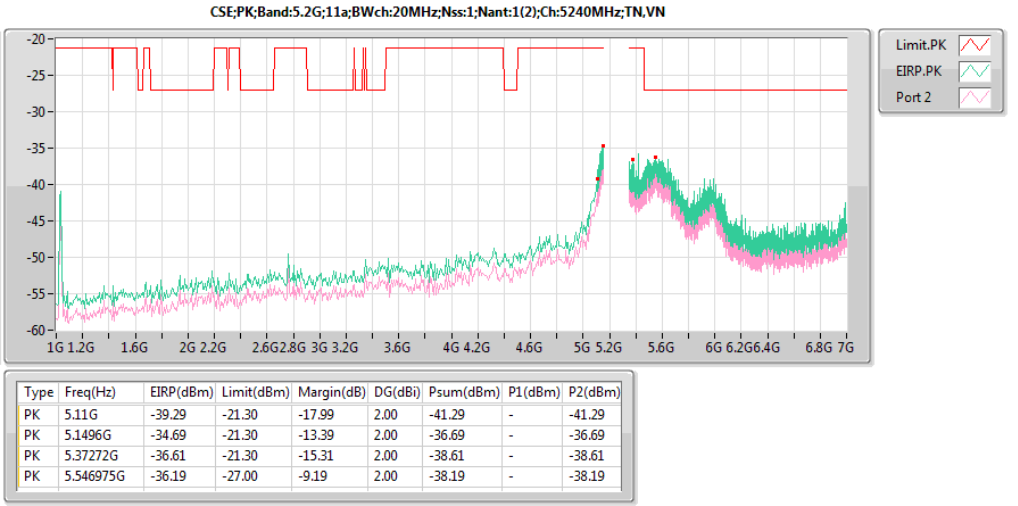
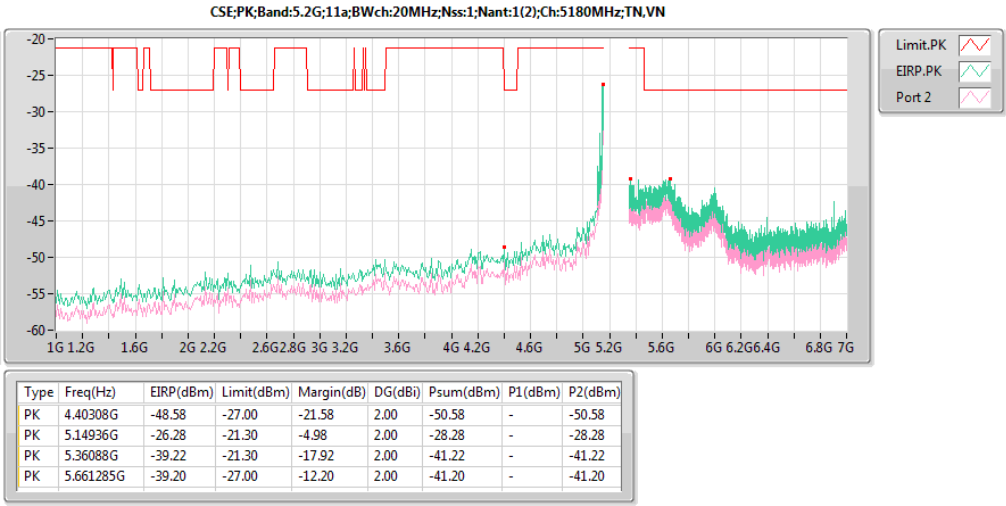


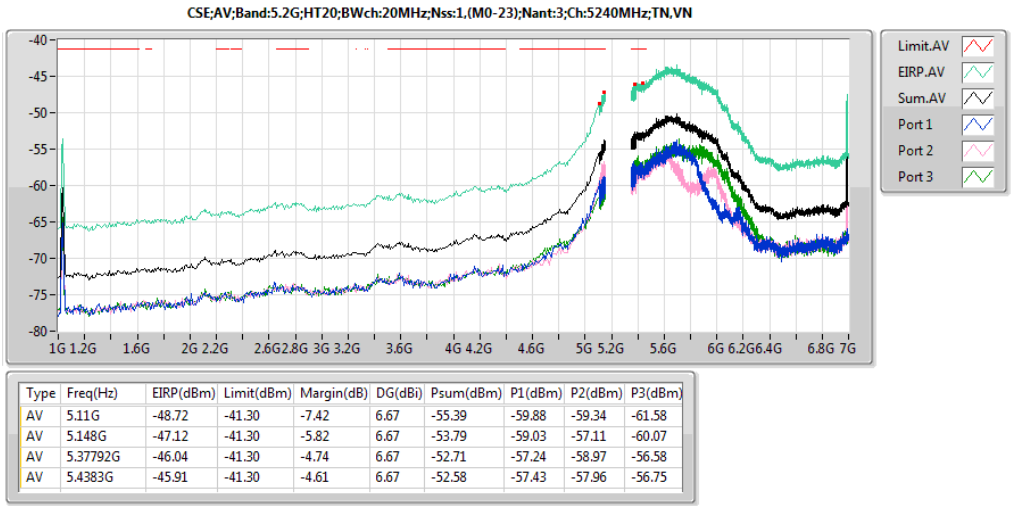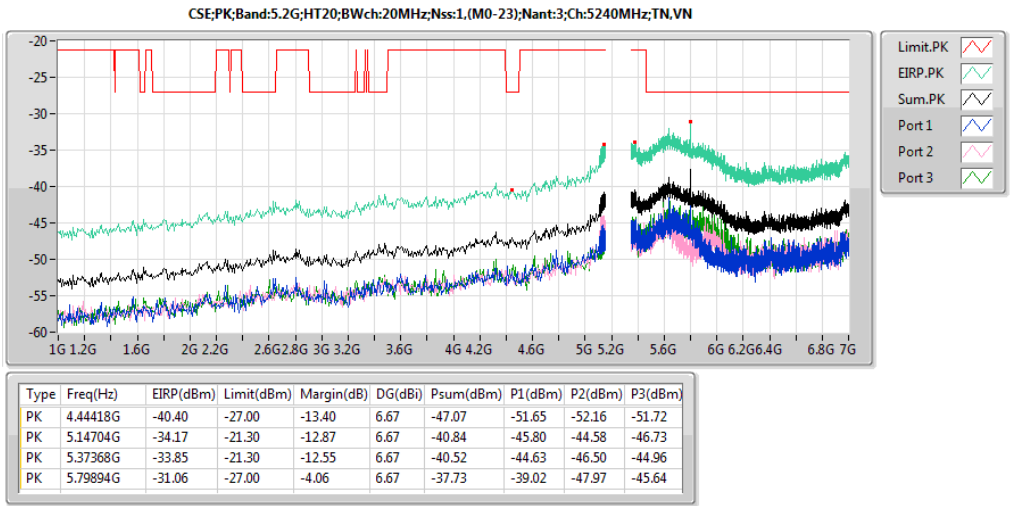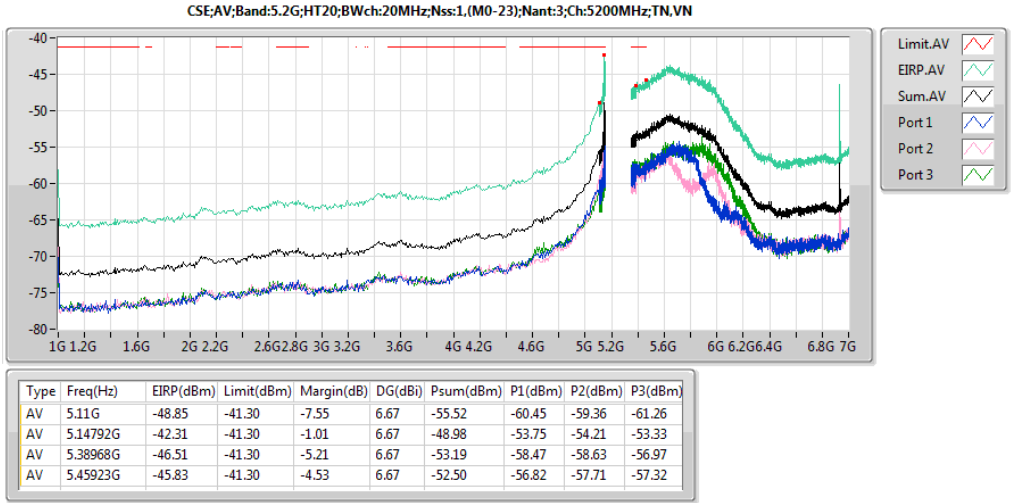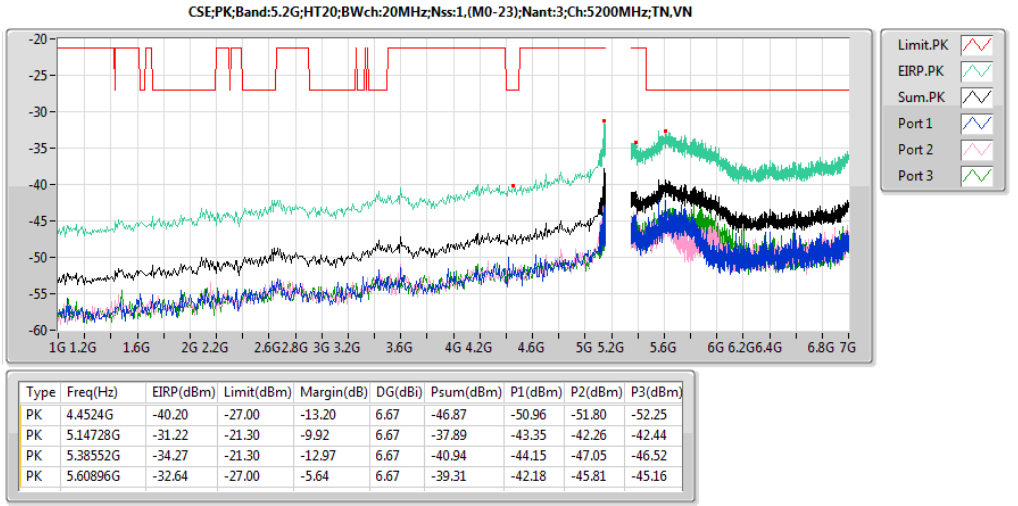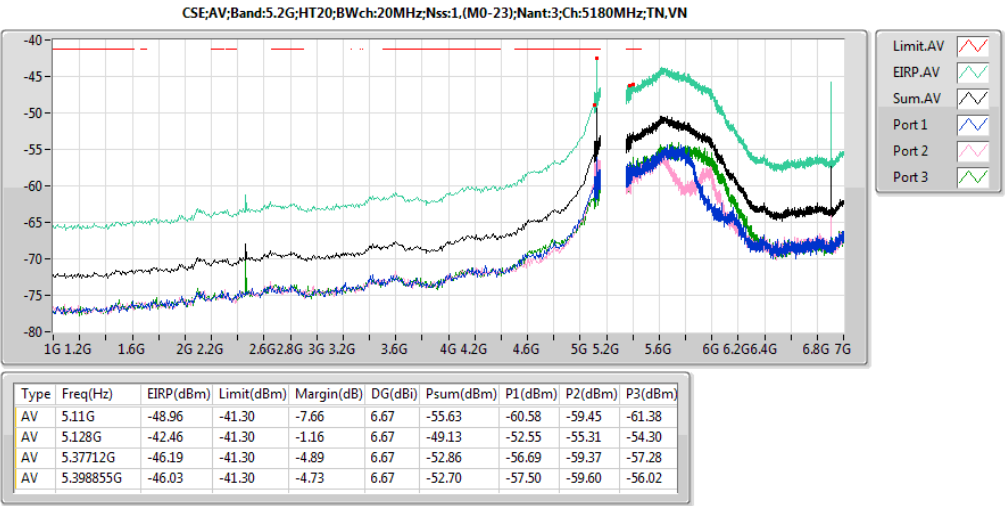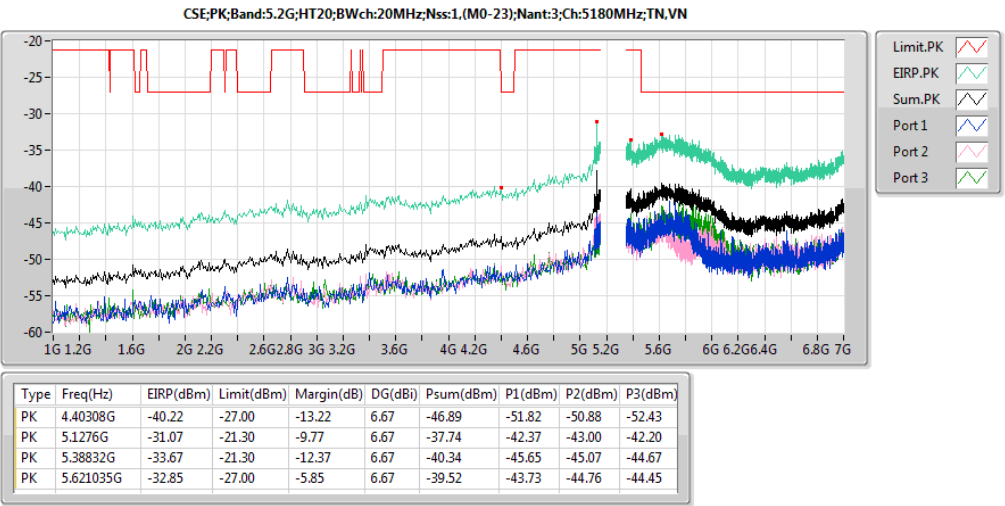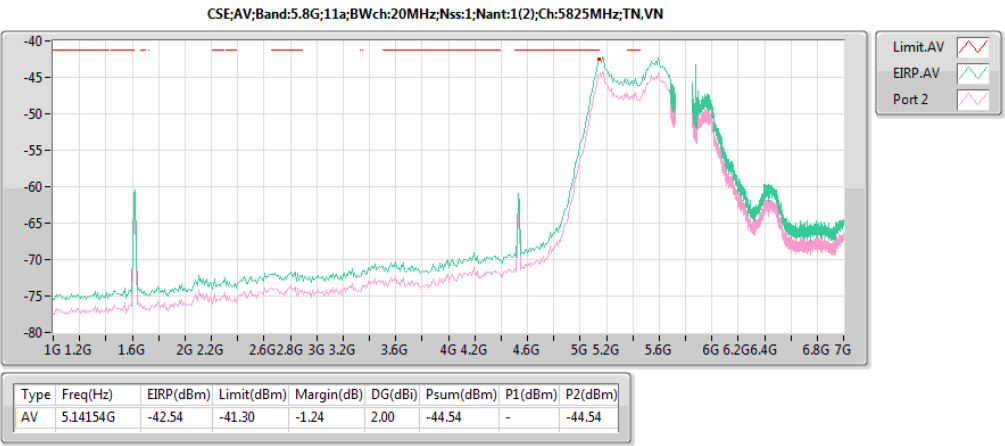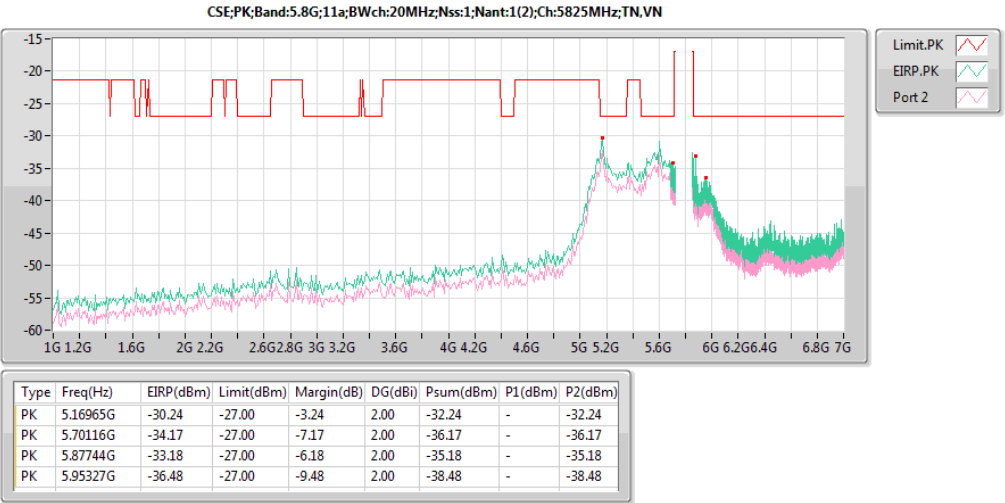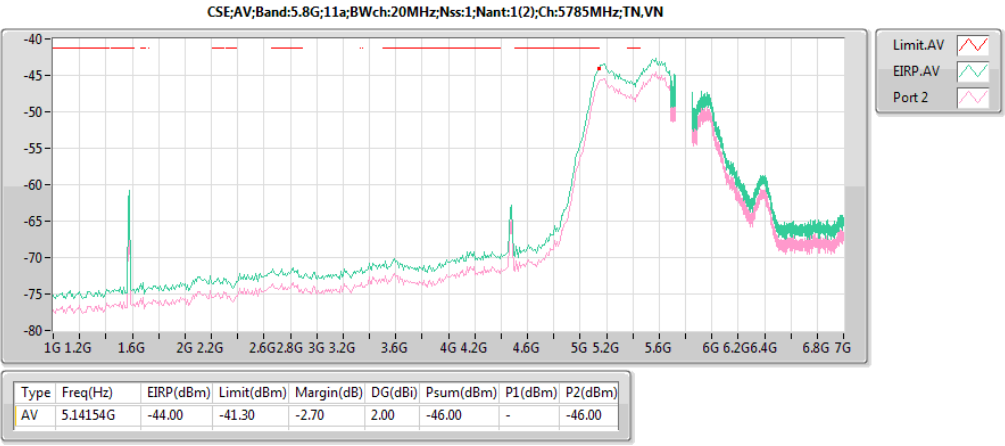







CSE Result

Appendix D

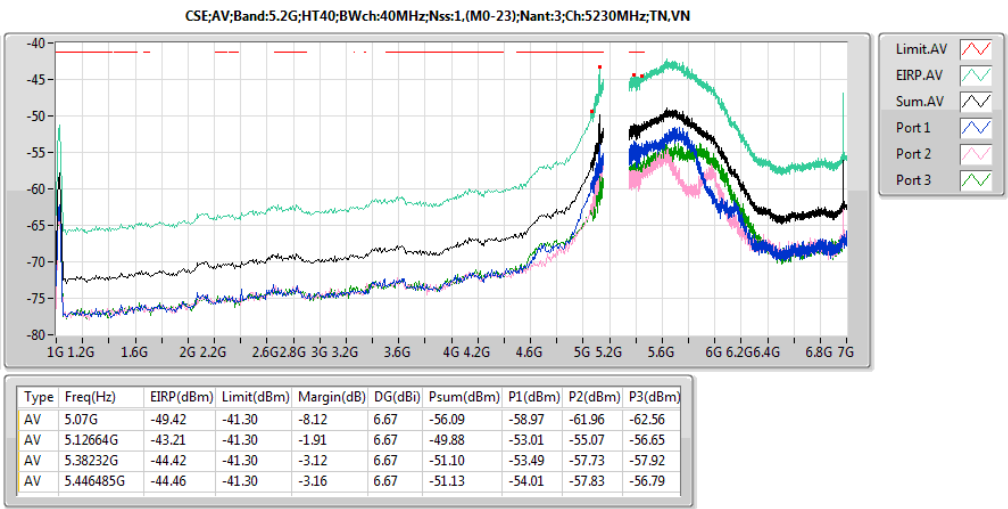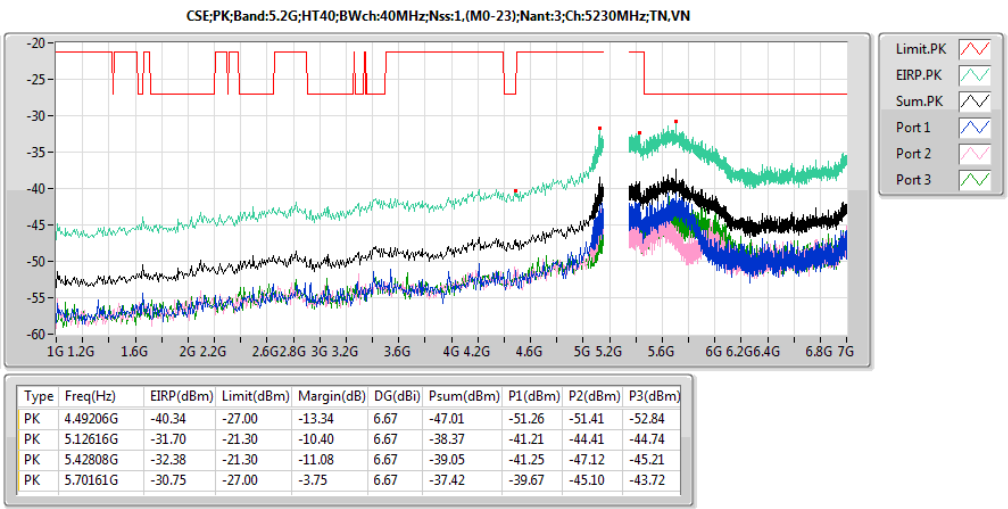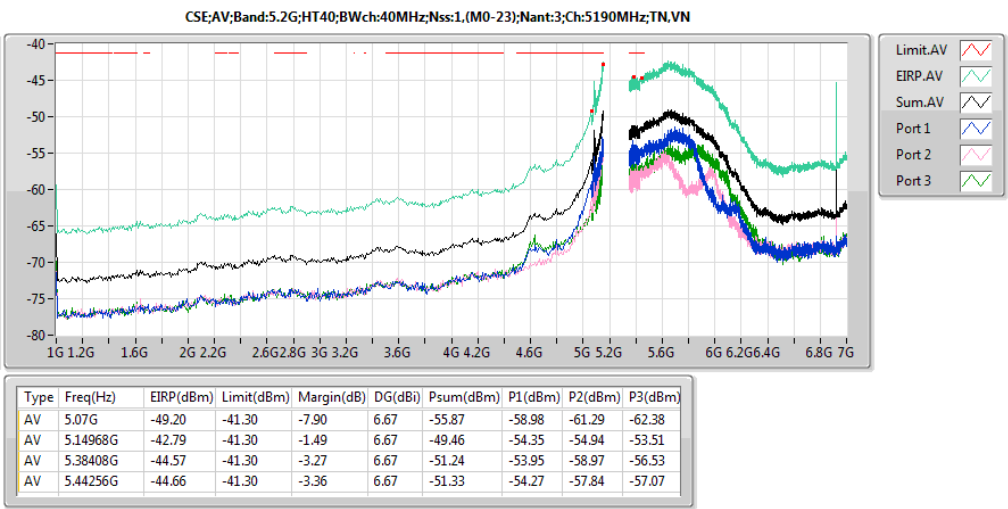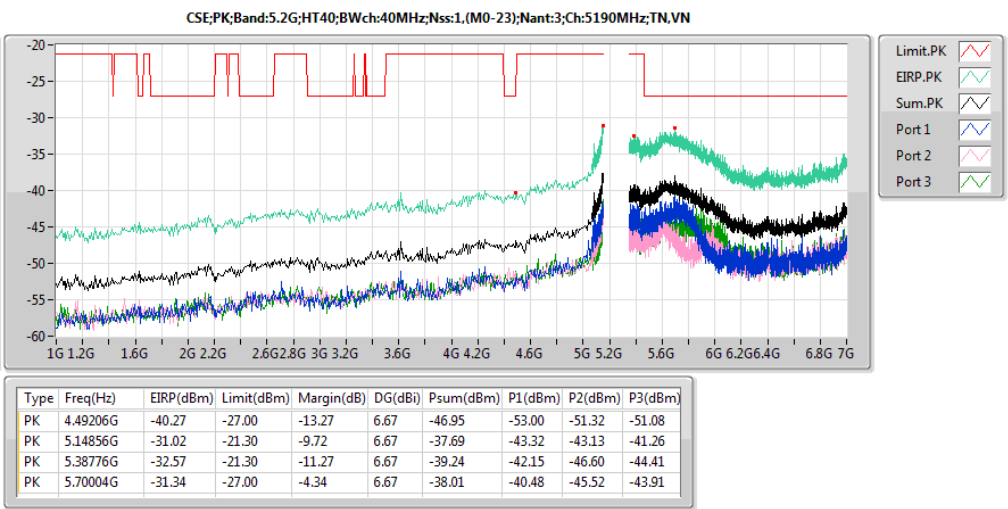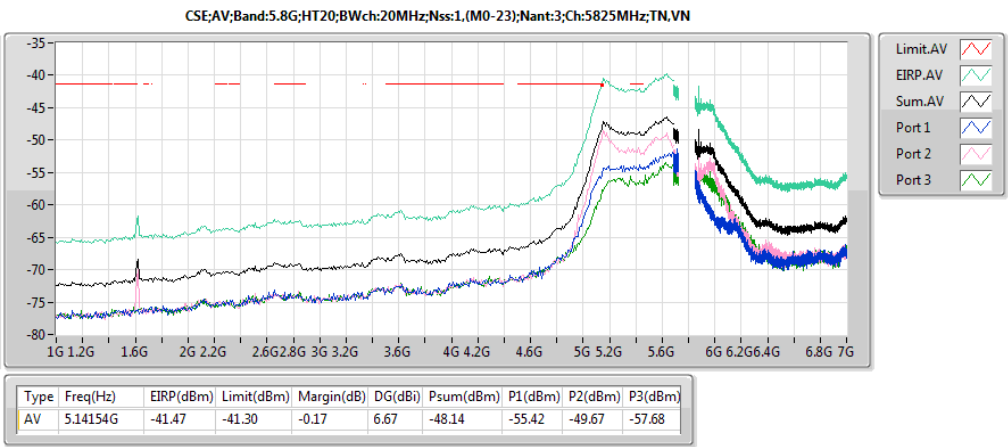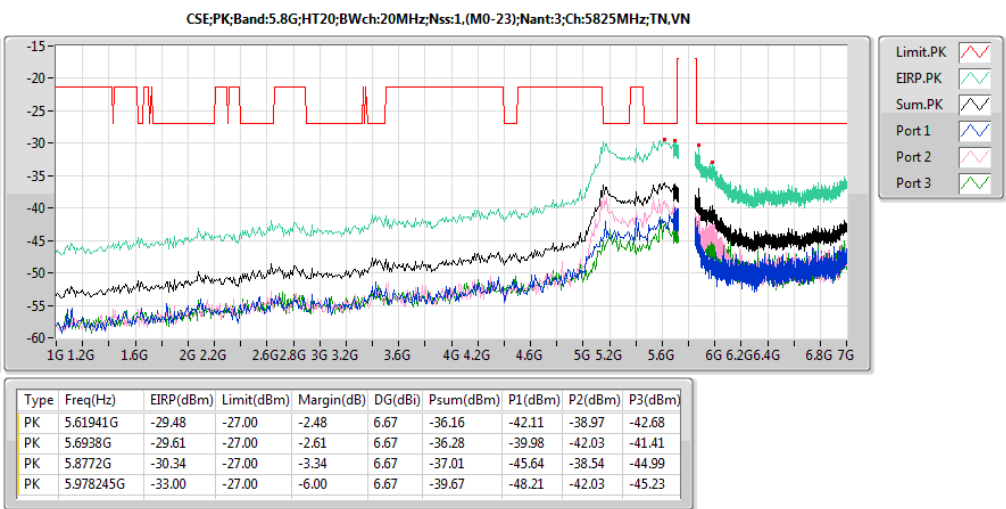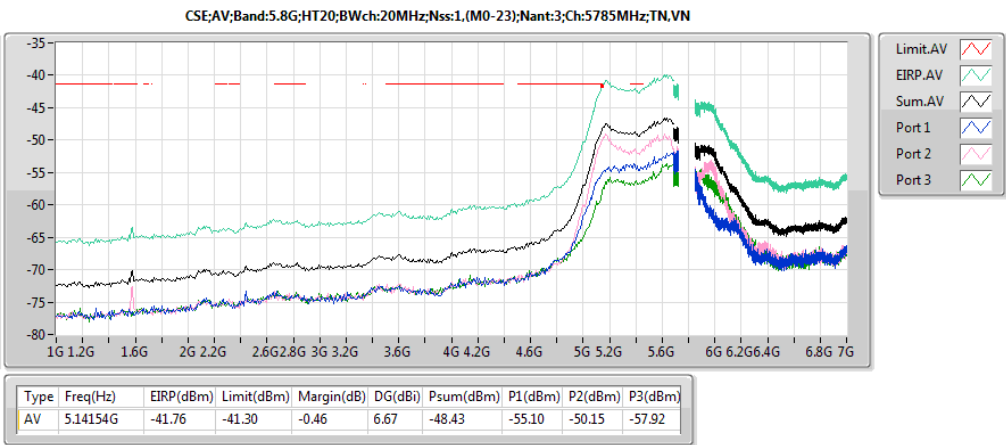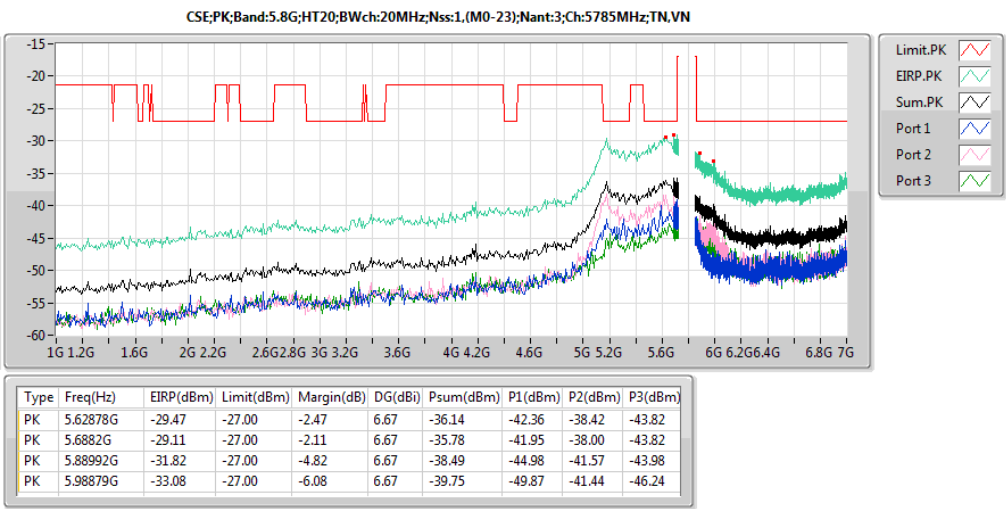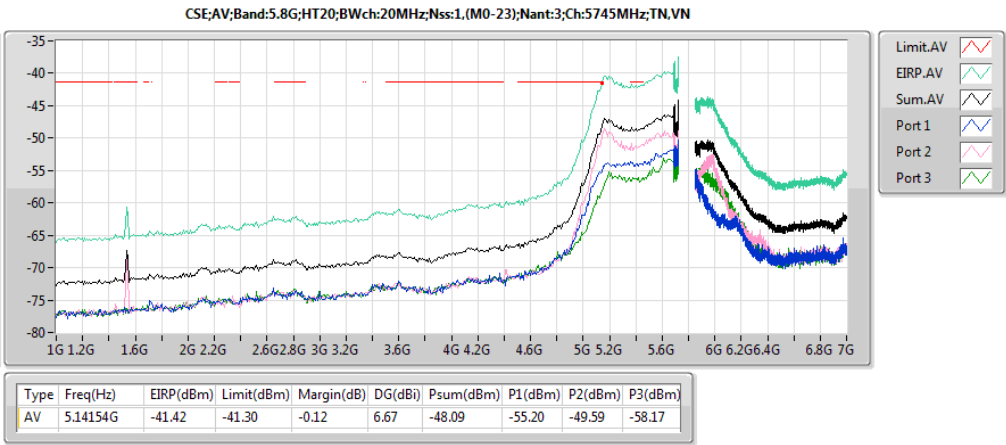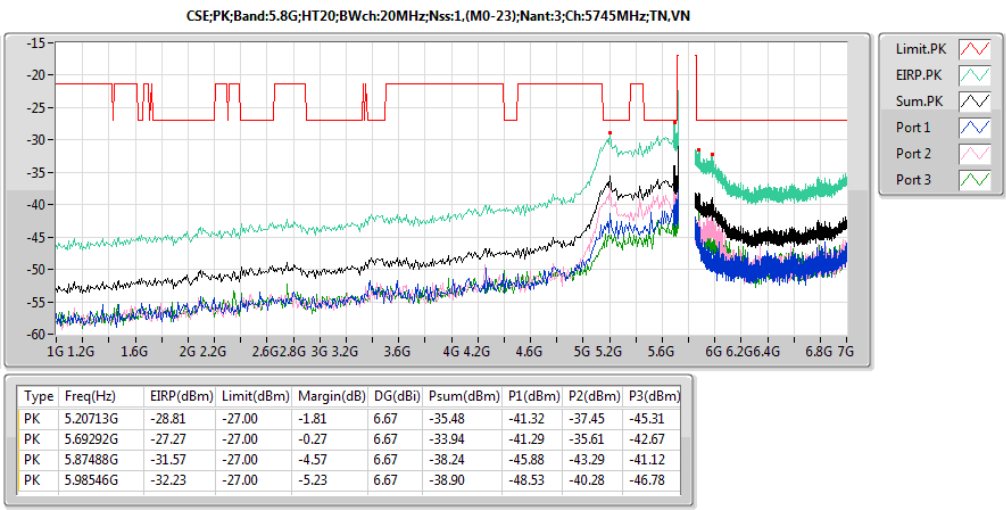



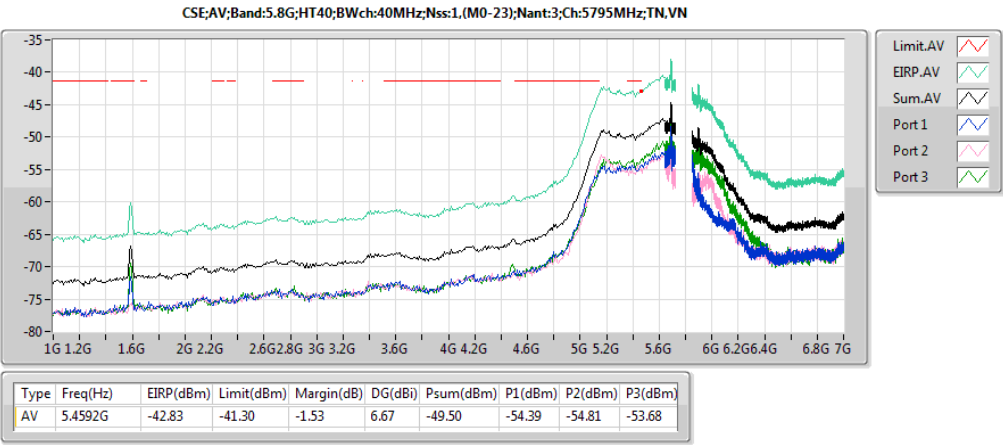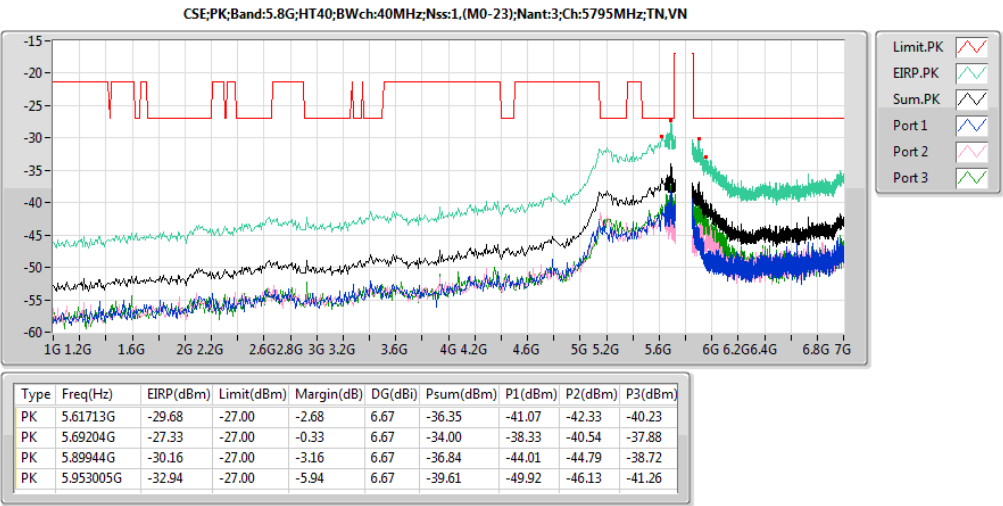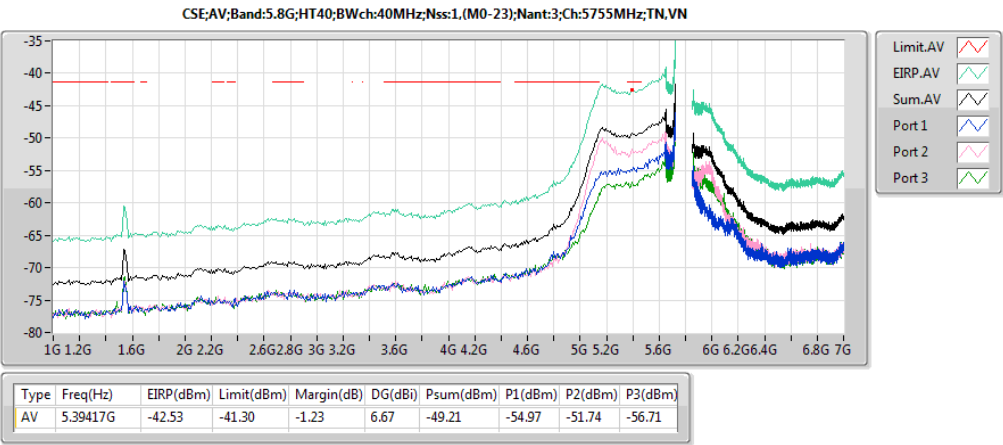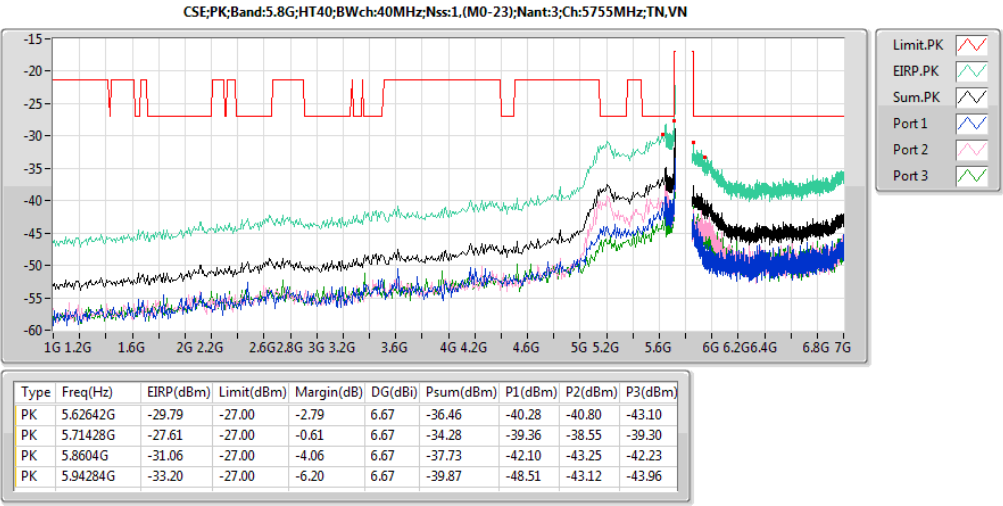



Summary

| Mode                                  | Result | F-Start<br>(Hz) | F-Stop<br>(Hz) | RBW<br>(Hz) | Type | Freq<br>(Hz) | EIRP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | DG<br>(dBi) | Loss<br>(dB) | Refl<br>(dB) | Psum<br>(dBm) | P1<br>(dBm) | P2<br>(dBm) | P3<br>(dBm) |
|---------------------------------------|--------|-----------------|----------------|-------------|------|--------------|---------------|----------------|----------------|-------------|--------------|--------------|---------------|-------------|-------------|-------------|
| 5.2G;HT20;20;1,(M0-23);3;5200;M;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 15.600625G   | -45.82        | -41.30         | -4.52          | 6.67        | 11.24        | 0.00         | -52.49        | -59.25      | -54.53      | -60.38      |
| 5.8G;HT20;20;1,(M0-23);3;5825;H;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 11.648875G   | -47.23        | -41.30         | -5.93          | 6.67        | 9.62         | 0.00         | -53.90        | -56.93      | -57.91      | -63.75      |
| 5.2G;HT20;20;1,(M0-23);3;5200;M;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 15.600625G   | -45.82        | -41.30         | -4.52          | 6.67        | 11.24        | 0.00         | -52.49        | -59.25      | -54.53      | -60.38      |
| 5.8G;HT20;20;1,(M0-23);3;5825;H;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 11.648875G   | -47.23        | -41.30         | -5.93          | 6.67        | 9.62         | 0.00         | -53.90        | -56.93      | -57.91      | -63.75      |
| 5.2G;HT20;20;1,(M0-23);3;5200;M;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 15.600625G   | -45.82        | -41.30         | -4.52          | 6.67        | 11.24        | 0.00         | -52.49        | -59.25      | -54.53      | -60.38      |
| 5.8G;HT20;20;1,(M0-23);3;5825;H;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 11.648875G   | -47.23        | -41.30         | -5.93          | 6.67        | 9.62         | 0.00         | -53.90        | -56.93      | -57.91      | -63.75      |



Result

| Mode                                  | Result | F-Start<br>(Hz) | F-Stop<br>(Hz) | RBW<br>(Hz) | Type | Freq<br>(Hz) | EIRP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | DG<br>(dBi) | Loss<br>(dB) | Refl<br>(dB) | Psum<br>(dBm) | P1<br>(dBm) | P2<br>(dBm) | P3<br>(dBm) |
|---------------------------------------|--------|-----------------|----------------|-------------|------|--------------|---------------|----------------|----------------|-------------|--------------|--------------|---------------|-------------|-------------|-------------|
| 5.2G;11a;20;1;1(2);5180;L;TN,VN       | Pass   | 7G              | 40G            | 1M          | PK   | 10.361875G   | -35.36        | -27.00         | -8.36          | 2.00        | 9.02         | 0.00         | -37.36        | -           | -37.36      |             |
| 5.2G;11a;20;1;1(2);5180;L;TN,VN       | Pass   | 7G              | 40G            | 1M          | PK   | 15.547G      | -41.34        | -21.30         | -20.04         | 2.00        | 11.22        | 0.00         | -43.34        | -           | -43.34      |             |
| 5.2G;11a;20;1;1(2);5180;L;TN,VN       | Pass   | 7G              | 40G            | 1M          | PK   | 36.935125G   | -47.42        | -27.00         | -20.42         | 2.00        | 16.11        | 0.00         | -49.42        | -           | -49.42      |             |
| 5.2G;11a;20;1;1(2);5180;L;TN,VN       | Pass   | 7G              | 40G            | 1M          | AV   | 15.542875G   | -52.05        | -41.30         | -10.75         | 2.00        | 11.22        | 0.00         | -54.05        | -           | -54.05      |             |
| 5.2G;11a;20;1;1(2);5180;L;TN,VN       | Pass   | 7G              | 40G            | 1M          | AV   | 38.68825G    | -67.05        | -41.30         | -25.75         | 2.00        | 16.34        | 0.00         | -69.05        | -           | -69.05      |             |
| 5.2G;11a;20;1;1(2);5180;L;TN,VN       | Pass   | 7G              | 40G            | 1M          | AV   | 39.971125G   | -67.07        | -41.30         | -25.77         | 2.00        | 16.50        | 0.00         | -69.07        | -           | -69.07      |             |
| 5.2G;11a;20;1;1(2);5200;M;TN,VN       | Pass   | 7G              | 40G            | 1M          | PK   | 10.399G      | -34.89        | -27.00         | -7.89          | 2.00        | 9.04         | 0.00         | -36.89        | -           | -36.89      |             |
| 5.2G;11a;20;1;1(2);5200;M;TN,VN       | Pass   | 7G              | 40G            | 1M          | PK   | 15.60475G    | -37.51        | -21.30         | -16.21         | 2.00        | 11.24        | 0.00         | -39.51        | -           | -39.51      |             |
| 5.2G;11a;20;1;1(2);5200;M;TN,VN       | Pass   | 7G              | 40G            | 1M          | PK   | 36.9145G     | -46.77        | -27.00         | -19.77         | 2.00        | 16.11        | 0.00         | -48.77        | -           | -48.77      |             |
| 5.2G;11a;20;1;1(2);5200;M;TN,VN       | Pass   | 7G              | 40G            | 1M          | AV   | 15.575875G   | -60.69        | -41.30         | -19.39         | 2.00        | 11.23        | 0.00         | -62.69        | -           | -62.69      |             |
| 5.2G;11a;20;1;1(2);5200;M;TN,VN       | Pass   | 7G              | 40G            | 1M          | AV   | 15.5965G     | -46.63        | -41.30         | -5.33          | 2.00        | 11.24        | 0.00         | -48.63        | -           | -48.63      |             |
| 5.2G;11a;20;1;1(2);5200;M;TN,VN       | Pass   | 7G              | 40G            | 1M          | AV   | 38.774875G   | -66.54        | -41.30         | -25.24         | 2.00        | 16.35        | 0.00         | -68.54        | -           | -68.54      |             |
| 5.2G;11a;20;1;1(2);5240;H;TN,VN       | Pass   | 7G              | 40G            | 1M          | PK   | 10.477375G   | -33.10        | -27.00         | -6.10          | 2.00        | 9.08         | 0.00         | -35.10        | -           | -35.10      |             |
| 5.2G;11a;20;1;1(2);5240;H;TN,VN       | Pass   | 7G              | 40G            | 1M          | PK   | 36.968125G   | -47.48        | -27.00         | -20.48         | 2.00        | 16.12        | 0.00         | -49.48        | -           | -49.48      |             |
| 5.2G;11a;20;1;1(2);5240;H;TN,VN       | Pass   | 7G              | 40G            | 1M          | PK   | 37.4425G     | -48.32        | -27.00         | -21.32         | 2.00        | 16.18        | 0.00         | -50.32        | -           | -50.32      |             |
| 5.2G;11a;20;1;1(2);5240;H;TN,VN       | Pass   | 7G              | 40G            | 1M          | AV   | 15.716125G   | -51.42        | -41.30         | -10.12         | 2.00        | 11.28        | 0.00         | -53.42        | -           | -53.42      |             |
| 5.2G;11a;20;1;1(2);5240;H;TN,VN       | Pass   | 7G              | 40G            | 1M          | AV   | 38.713G      | -67.10        | -41.30         | -25.80         | 2.00        | 16.35        | 0.00         | -69.10        | -           | -69.10      |             |
| 5.2G;11a;20;1;1(2);5240;H;TN,VN       | Pass   | 7G              | 40G            | 1M          | AV   | 39.95875G    | -67.12        | -41.30         | -25.82         | 2.00        | 16.50        | 0.00         | -69.12        | -           | -69.12      |             |
| 5.8G;11a;20;1;1(2);5745;L;TN,VN       | Pass   | 7G              | 40G            | 1M          | PK   | 11.483875G   | -40.00        | -21.30         | -18.70         | 2.00        | 9.55         | 0.00         | -42.00        | -           | -42.00      |             |
| 5.8G;11a;20;1;1(2);5745;L;TN,VN       | Pass   | 7G              | 40G            | 1M          | PK   | 17.225875G   | -44.45        | -27.00         | -17.45         | 2.00        | 11.81        | 0.00         | -46.45        | -           | -46.45      |             |
| 5.8G;11a;20;1;1(2);5745;L;TN,VN       | Pass   | 7G              | 40G            | 1M          | PK   | 17.234125G   | -42.71        | -27.00         | -15.71         | 2.00        | 11.82        | 0.00         | -44.71        | -           | -44.71      |             |
| 5.8G;11a;20;1;1(2);5745;L;TN,VN       | Pass   | 7G              | 40G            | 1M          | PK   | 28.726375G   | -44.87        | -27.00         | -17.87         | 2.00        | 14.77        | 0.00         | -46.87        | -           | -46.87      |             |
| 5.8G;11a;20;1;1(2);5745;L;TN,VN       | Pass   | 7G              | 40G            | 1M          | AV   | 11.488G      | -47.58        | -41.30         | -6.28          | 2.00        | 9.55         | 0.00         | -49.58        | -           | -49.58      |             |
| 5.8G;11a;20;1;1(2);5745;L;TN,VN       | Pass   | 7G              | 40G            | 1M          | AV   | 38.80375G    | -67.20        | -41.30         | -25.90         | 2.00        | 16.36        | 0.00         | -69.20        | -           | -69.20      |             |
| 5.8G;11a;20;1;1(2);5745;L;TN,VN       | Pass   | 7G              | 40G            | 1M          | AV   | 39.979375G   | -67.36        | -41.30         | -26.06         | 2.00        | 16.50        | 0.00         | -69.36        | -           | -69.36      |             |
| 5.8G;11a;20;1;1(2);5785;M;TN,VN       | Pass   | 7G              | 40G            | 1M          | PK   | 11.56225G    | -40.32        | -21.30         | -19.02         | 2.00        | 9.58         | 0.00         | -42.32        | -           | -42.32      |             |
| 5.8G;11a;20;1;1(2);5785;M;TN,VN       | Pass   | 7G              | 40G            | 1M          | PK   | 17.362G      | -47.37        | -27.00         | -20.37         | 2.00        | 11.86        | 0.00         | -49.37        | -           | -49.37      |             |
| 5.8G;11a;20;1;1(2);5785;M;TN,VN       | Pass   | 7G              | 40G            | 1M          | PK   | 28.92025G    | -45.07        | -27.00         | -18.07         | 2.00        | 14.81        | 0.00         | -47.07        | -           | -47.07      |             |
| 5.8G;11a;20;1;1(2);5785;M;TN,VN       | Pass   | 7G              | 40G            | 1M          | AV   | 11.566375G   | -47.54        | -41.30         | -6.24          | 2.00        | 9.59         | 0.00         | -49.54        | -           | -49.54      |             |
| 5.8G;11a;20;1;1(2);5785;M;TN,VN       | Pass   | 7G              | 40G            | 1M          | AV   | 38.667625G   | -67.10        | -41.30         | -25.80         | 2.00        | 16.34        | 0.00         | -69.10        | -           | -69.10      |             |
| 5.8G;11a;20;1;1(2);5785;M;TN,VN       | Pass   | 7G              | 40G            | 1M          | AV   | 38.7625G     | -66.96        | -41.30         | -25.66         | 2.00        | 16.35        | 0.00         | -68.96        | -           | -68.96      |             |
| 5.8G;11a;20;1;1(2);5825;H;TN,VN       | Pass   | 7G              | 40G            | 1M          | PK   | 11.64475G    | -39.86        | -21.30         | -18.56         | 2.00        | 9.62         | 0.00         | -41.86        | -           | -41.86      |             |
| 5.8G;11a;20;1;1(2);5825;H;TN,VN       | Pass   | 7G              | 40G            | 1M          | PK   | 17.461G      | -36.21        | -27.00         | -9.21          | 2.00        | 11.89        | 0.00         | -38.21        | -           | -38.21      |             |
| 5.8G;11a;20;1;1(2);5825;H;TN,VN       | Pass   | 7G              | 40G            | 1M          | PK   | 37.463125G   | -48.16        | -27.00         | -21.16         | 2.00        | 16.18        | 0.00         | -50.16        | -           | -50.16      |             |
| 5.8G;11a;20;1;1(2);5825;H;TN,VN       | Pass   | 7G              | 40G            | 1M          | AV   | 11.648875G   | -47.41        | -41.30         | -6.11          | 2.00        | 9.62         | 0.00         | -49.41        | -           | -49.41      |             |
| 5.8G;11a;20;1;1(2);5825;H;TN,VN       | Pass   | 7G              | 40G            | 1M          | AV   | 38.651125G   | -67.57        | -41.30         | -26.27         | 2.00        | 16.34        | 0.00         | -69.57        | -           | -69.57      |             |
| 5.8G;11a;20;1;1(2);5825;H;TN,VN       | Pass   | 7G              | 40G            | 1M          | AV   | 38.750125G   | -66.63        | -41.30         | -25.33         | 2.00        | 16.35        | 0.00         | -68.63        | -           | -68.63      |             |
| 5.2G;HT20;20;1,(M0-23);3;5180;L;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 10.35775G    | -35.82        | -27.00         | -8.82          | 6.67        | 9.02         | 0.00         | -42.49        | -54.12      | -43.09      | -54.74      |
| 5.2G;HT20;20;1,(M0-23);3;5180;L;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 37.355875G   | -39.75        | -27.00         | -12.75         | 6.67        | 16.17        | 0.00         | -46.42        | -51.21      | -50.79      | -51.63      |
| 5.2G;HT20;20;1,(M0-23);3;5180;L;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 38.098375G   | -40.04        | -27.00         | -13.04         | 6.67        | 16.27        | 0.00         | -46.71        | -53.81      | -49.07      | -53.20      |
| 5.2G;HT20;20;1,(M0-23);3;5180;L;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 15.542875G   | -47.08        | -41.30         | -5.78          | 6.67        | 11.22        | 0.00         | -53.75        | -60.71      | -60.11      | -56.20      |
| 5.2G;HT20;20;1,(M0-23);3;5180;L;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 38.75425G    | -57.78        | -41.30         | -16.48         | 6.67        | 16.35        | 0.00         | -64.45        | -69.20      | -69.19      | -69.28      |
| 5.2G;HT20;20;1,(M0-23);3;5180;L;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 39.967G      | -58.17        | -41.30         | -16.87         | 6.67        | 16.50        | 0.00         | -64.84        | -69.52      | -70.07      | -69.29      |
| 5.2G;HT20;20;1,(M0-23);3;5200;M;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 10.399G      | -39.85        | -27.00         | -12.85         | 6.67        | 9.04         | 0.00         | -46.52        | -55.57      | -47.57      | -56.88      |
| 5.2G;HT20;20;1,(M0-23);3;5200;M;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 34.501375G   | -40.04        | -27.00         | -13.04         | 6.67        | 15.76        | 0.00         | -46.71        | -50.16      | -52.27      | -52.40      |
| 5.2G;HT20;20;1,(M0-23);3;5200;M;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 37.40125G    | -39.87        | -27.00         | -12.87         | 6.67        | 16.17        | 0.00         | -46.54        | -53.13      | -49.67      | -51.86      |
| 5.2G;HT20;20;1,(M0-23);3;5200;M;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 15.600625G   | -45.82        | -41.30         | -4.52          | 6.67        | 11.24        | 0.00         | -52.49        | -59.25      | -54.53      | -60.38      |
| 5.2G;HT20;20;1,(M0-23);3;5200;M;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 38.67175G    | -58.18        | -41.30         | -16.88         | 6.67        | 16.34        | 0.00         | -64.85        | -69.94      | -69.44      | -69.50      |
| 5.2G;HT20;20;1,(M0-23);3;5200;M;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 38.750125G   | -57.87        | -41.30         | -16.57         | 6.67        | 16.35        | 0.00         | -64.54        | -69.57      | -69.10      | -69.27      |
| 5.2G;HT20;20;1,(M0-23);3;5240;H;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 10.477375G   | -46.68        | -27.00         | -19.68         | 6.67        | 9.08         | 0.00         | -53.35        | -62.68      | -58.24      | -55.88      |
| 5.2G;HT20;20;1,(M0-23);3;5240;H;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 36.3865G     | -40.12        | -27.00         | -13.12         | 6.67        | 16.04        | 0.00         | -46.79        | -55.32      | -48.72      | -53.39      |
| 5.2G;HT20;20;1,(M0-23);3;5240;H;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 37.00525G    | -40.11        | -27.00         | -13.11         | 6.67        | 16.12        | 0.00         | -46.78        | -48.53      | -54.39      | -54.77      |
| 5.2G;HT20;20;1,(M0-23);3;5240;H;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 37.430125G   | -39.43        | -27.00         | -12.43         | 6.67        | 16.18        | 0.00         | -46.10        | -51.10      | -50.42      | -51.13      |
| 5.2G;HT20;20;1,(M0-23);3;5240;H;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 15.72025G    | -50.11        | -41.30         | -8.81          | 6.67        | 11.28        | 0.00         | -56.78        | -58.66      | -63.72      | -65.03      |
| 5.2G;HT20;20;1,(M0-23);3;5240;H;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 38.700625G   | -57.85        | -41.30         | -16.55         | 6.67        | 16.34        | 0.00         | -64.52        | -69.33      | -69.56      | -68.99      |
| 5.2G;HT20;20;1,(M0-23);3;5240;H;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 39.967G      | -58.17        | -41.30         | -16.87         | 6.67        | 16.50        | 0.00         | -64.84        | -69.83      | -69.74      | -69.29      |
| 5.8G;HT20;20;1,(M0-23);3;5745;L;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 11.483875G   | -34.57        | -21.30         | -13.27         | 6.67        | 9.55         | 0.00         | -41.24        | -45.59      | -43.38      | -57.49      |
| 5.8G;HT20;20;1,(M0-23);3;5745;L;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 17.225875G   | -39.20        | -27.00         | -12.20         | 6.67        | 11.81        | 0.00         | -45.87        | -51.13      | -52.23      | -49.14      |
| 5.8G;HT20;20;1,(M0-23);3;5745;L;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 17.242375G   | -36.94        | -27.00         | -9.94          | 6.67        | 11.82        | 0.00         | -43.61        | -50.62      | -45.59      | -51.35      |
| 5.8G;HT20;20;1,(M0-23);3;5745;L;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 28.718125G   | -39.24        | -27.00         | -12.24         | 6.67        | 14.77        | 0.00         | -45.91        | -50.52      | -50.06      | -51.62      |
| 5.8G;HT20;20;1,(M0-23);3;5745;L;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 11.488G      | -48.16        | -41.30         | -6.86          | 6.67        | 9.55         | 0.00         | -54.83        | -58.69      | -58.05      | -64.29      |













| Mode                                  | Result | F-Start<br>(Hz) | F-Stop<br>(Hz) | RBW<br>(Hz) | Type | Freq<br>(Hz) | EIRP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | DG<br>(dBi) | Loss<br>(dB) | Refl<br>(dB) | Psum<br>(dBm) | P1<br>(dBm) | P2<br>(dBm) | P3<br>(dBm) |
|---------------------------------------|--------|-----------------|----------------|-------------|------|--------------|---------------|----------------|----------------|-------------|--------------|--------------|---------------|-------------|-------------|-------------|
| 5.8G;HT20;20;1,(M0-23);3;5745;L;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 38.746G      | -58.01        | -41.30         | -16.71         | 6.67        | 16.35        | 0.00         | -64.68        | -69.42      | -69.59      | -69.34      |
| 5.8G;HT20;20;1,(M0-23);3;5745;L;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 39.962875G   | -58.32        | -41.30         | -17.02         | 6.67        | 16.50        | 0.00         | -64.99        | -69.91      | -69.36      | -70.03      |
| 5.8G;HT20;20;1,(M0-23);3;5785;M;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 11.56225G    | -41.21        | -21.30         | -19.91         | 6.67        | 9.58         | 0.00         | -47.88        | -52.44      | -50.39      | -58.45      |
| 5.8G;HT20;20;1,(M0-23);3;5785;M;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 36.92275G    | -39.54        | -27.00         | -12.54         | 6.67        | 16.11        | 0.00         | -46.21        | -52.05      | -50.92      | -50.17      |
| 5.8G;HT20;20;1,(M0-23);3;5785;M;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 37.3765G     | -40.31        | -27.00         | -13.31         | 6.67        | 16.17        | 0.00         | -46.98        | -51.15      | -52.24      | -51.93      |
| 5.8G;HT20;20;1,(M0-23);3;5785;M;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 38.106625G   | -40.37        | -27.00         | -13.37         | 6.67        | 16.27        | 0.00         | -47.04        | -53.08      | -54.14      | -49.58      |
| 5.8G;HT20;20;1,(M0-23);3;5785;M;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 11.566375G   | -51.02        | -41.30         | -9.72          | 6.67        | 9.59         | 0.00         | -57.69        | -62.25      | -60.49      | -66.71      |
| 5.8G;HT20;20;1,(M0-23);3;5785;M;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 38.7625G     | -57.63        | -41.30         | -16.33         | 6.67        | 16.35        | 0.00         | -64.30        | -69.23      | -68.99      | -69.00      |
| 5.8G;HT20;20;1,(M0-23);3;5785;M;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 39.967G      | -58.19        | -41.30         | -16.89         | 6.67        | 16.50        | 0.00         | -64.86        | -69.63      | -69.80      | -69.47      |
| 5.8G;HT20;20;1,(M0-23);3;5825;H;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 11.657125G   | -35.71        | -21.30         | -14.41         | 6.67        | 9.63         | 0.00         | -42.38        | -45.31      | -47.33      | -50.03      |
| 5.8G;HT20;20;1,(M0-23);3;5825;H;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 17.4775G     | -33.11        | -27.00         | -6.11          | 6.67        | 11.90        | 0.00         | -39.78        | -44.03      | -45.77      | -44.08      |
| 5.8G;HT20;20;1,(M0-23);3;5825;H;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 37.372375G   | -40.13        | -27.00         | -13.13         | 6.67        | 16.17        | 0.00         | -46.80        | -51.93      | -53.40      | -50.05      |
| 5.8G;HT20;20;1,(M0-23);3;5825;H;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 38.07775G    | -39.79        | -27.00         | -12.79         | 6.67        | 16.26        | 0.00         | -46.46        | -49.60      | -51.60      | -53.30      |
| 5.8G;HT20;20;1,(M0-23);3;5825;H;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 11.648875G   | -47.23        | -41.30         | -5.93          | 6.67        | 9.62         | 0.00         | -53.90        | -56.93      | -57.91      | -63.75      |
| 5.8G;HT20;20;1,(M0-23);3;5825;H;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 38.659375G   | -58.06        | -41.30         | -16.76         | 6.67        | 16.34        | 0.00         | -64.73        | -69.55      | -69.35      | -69.62      |
| 5.8G;HT20;20;1,(M0-23);3;5825;H;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 39.9835G     | -58.18        | -41.30         | -16.88         | 6.67        | 16.50        | 0.00         | -64.85        | -69.87      | -69.41      | -69.60      |
| 5.2G;HT40;40;1,(M0-23);3;5190;L;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 10.3825G     | -41.78        | -27.00         | -14.78         | 6.67        | 9.03         | 0.00         | -48.45        | -58.93      | -49.32      | -58.81      |
| 5.2G;HT40;40;1,(M0-23);3;5190;L;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 36.84025G    | -39.56        | -27.00         | -12.56         | 6.67        | 16.10        | 0.00         | -46.23        | -49.92      | -52.64      | -50.87      |
| 5.2G;HT40;40;1,(M0-23);3;5190;L;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 37.4095G     | -40.23        | -27.00         | -13.23         | 6.67        | 16.18        | 0.00         | -46.90        | -55.50      | -49.65      | -51.69      |
| 5.2G;HT40;40;1,(M0-23);3;5190;L;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 38.12725G    | -40.14        | -27.00         | -13.14         | 6.67        | 16.27        | 0.00         | -46.81        | -51.79      | -53.33      | -50.18      |
| 5.2G;HT40;40;1,(M0-23);3;5190;L;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 15.57175G    | -49.09        | -41.30         | -7.79          | 6.67        | 11.23        | 0.00         | -55.76        | -72.78      | -59.59      | -58.23      |
| 5.2G;HT40;40;1,(M0-23);3;5190;L;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 15.58G       | -48.43        | -41.30         | -7.13          | 6.67        | 11.23        | 0.00         | -55.10        | -68.61      | -59.19      | -57.58      |
| 5.2G;HT40;40;1,(M0-23);3;5190;L;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 38.746G      | -58.06        | -41.30         | -16.76         | 6.67        | 16.35        | 0.00         | -64.73        | -69.68      | -68.76      | -70.17      |
| 5.2G;HT40;40;1,(M0-23);3;5230;H;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 10.45675G    | -46.16        | -27.00         | -19.16         | 6.67        | 9.07         | 0.00         | -52.83        | -58.75      | -57.77      | -56.56      |
| 5.2G;HT40;40;1,(M0-23);3;5230;H;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 33.981625G   | -40.13        | -27.00         | -13.13         | 6.67        | 15.68        | 0.00         | -46.80        | -51.34      | -53.19      | -50.58      |
| 5.2G;HT40;40;1,(M0-23);3;5230;H;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 34.489G      | -40.22        | -27.00         | -13.22         | 6.67        | 15.76        | 0.00         | -46.89        | -51.06      | -51.14      | -53.05      |
| 5.2G;HT40;40;1,(M0-23);3;5230;H;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 37.40125G    | -40.16        | -27.00         | -13.16         | 6.67        | 16.17        | 0.00         | -46.83        | -53.98      | -52.08      | -49.77      |
| 5.2G;HT40;40;1,(M0-23);3;5230;H;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 15.70375G    | -52.67        | -41.30         | -11.37         | 6.67        | 11.28        | 0.00         | -59.34        | -60.69      | -66.31      | -71.09      |
| 5.2G;HT40;40;1,(M0-23);3;5230;H;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 38.6965G     | -58.13        | -41.30         | -16.83         | 6.67        | 16.34        | 0.00         | -64.80        | -69.32      | -69.60      | -69.80      |
| 5.2G;HT40;40;1,(M0-23);3;5230;H;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 39.94225G    | -58.38        | -41.30         | -17.08         | 6.67        | 16.50        | 0.00         | -65.05        | -69.47      | -70.65      | -69.46      |
| 5.8G;HT40;40;1,(M0-23);3;5755;L;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 11.51275G    | -39.48        | -21.30         | -18.18         | 6.67        | 9.56         | 0.00         | -46.15        | -51.61      | -56.99      | -48.14      |
| 5.8G;HT40;40;1,(M0-23);3;5755;L;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 17.258875G   | -36.33        | -27.00         | -9.33          | 6.67        | 11.82        | 0.00         | -43.00        | -50.64      | -53.92      | -44.26      |
| 5.8G;HT40;40;1,(M0-23);3;5755;L;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 37.397125G   | -39.31        | -27.00         | -12.31         | 6.67        | 16.17        | 0.00         | -45.98        | -50.60      | -49.41      | -52.92      |
| 5.8G;HT40;40;1,(M0-23);3;5755;L;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 38.048875G   | -39.57        | -27.00         | -12.57         | 6.67        | 16.26        | 0.00         | -46.24        | -53.15      | -50.29      | -50.19      |
| 5.8G;HT40;40;1,(M0-23);3;5755;L;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 11.508625G   | -49.07        | -41.30         | -7.77          | 6.67        | 9.56         | 0.00         | -55.74        | -60.01      | -64.44      | -58.83      |
| 5.8G;HT40;40;1,(M0-23);3;5755;L;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 38.713G      | -57.99        | -41.30         | -16.69         | 6.67        | 16.35        | 0.00         | -64.66        | -69.91      | -68.59      | -69.92      |
| 5.8G;HT40;40;1,(M0-23);3;5755;L;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 39.95875G    | -58.29        | -41.30         | -16.99         | 6.67        | 16.50        | 0.00         | -64.96        | -70.30      | -69.64      | -69.33      |
| 5.8G;HT40;40;1,(M0-23);3;5795;H;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 11.587G      | -42.33        | -21.30         | -21.03         | 6.67        | 9.60         | 0.00         | -49.00        | -52.11      | -52.93      | -58.71      |
| 5.8G;HT40;40;1,(M0-23);3;5795;H;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 36.918625G   | -40.11        | -27.00         | -13.11         | 6.67        | 16.11        | 0.00         | -46.78        | -53.56      | -54.12      | -48.96      |
| 5.8G;HT40;40;1,(M0-23);3;5795;H;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 37.41775G    | -40.11        | -27.00         | -13.11         | 6.67        | 16.18        | 0.00         | -46.78        | -51.92      | -51.42      | -51.33      |
| 5.8G;HT40;40;1,(M0-23);3;5795;H;TN,VN | Pass   | 7G              | 40G            | 1M          | PK   | 38.12725G    | -40.23        | -27.00         | -13.23         | 6.67        | 16.27        | 0.00         | -46.90        | -51.18      | -50.25      | -54.72      |
| 5.8G;HT40;40;1,(M0-23);3;5795;H;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 11.587G      | -51.15        | -41.30         | -9.85          | 6.67        | 9.60         | 0.00         | -57.82        | -61.21      | -61.29      | -68.16      |
| 5.8G;HT40;40;1,(M0-23);3;5795;H;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 38.675875G   | -58.23        | -41.30         | -16.93         | 6.67        | 16.34        | 0.00         | -64.90        | -69.20      | -69.86      | -69.99      |
| 5.8G;HT40;40;1,(M0-23);3;5795;H;TN,VN | Pass   | 7G              | 40G            | 1M          | AV   | 38.750125G   | -57.88        | -41.30         | -16.58         | 6.67        | 16.35        | 0.00         | -64.55        | -69.26      | -69.13      | -69.58      |





















CSE Result





Appendix D

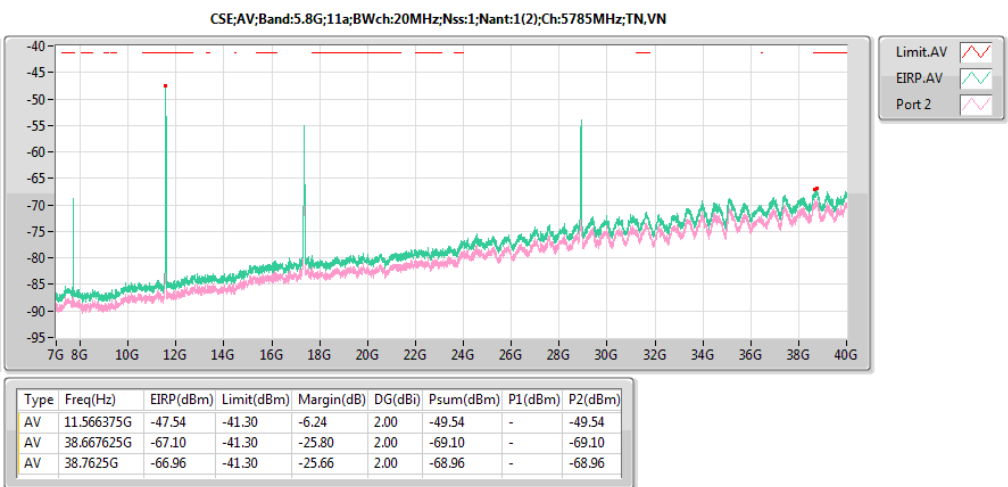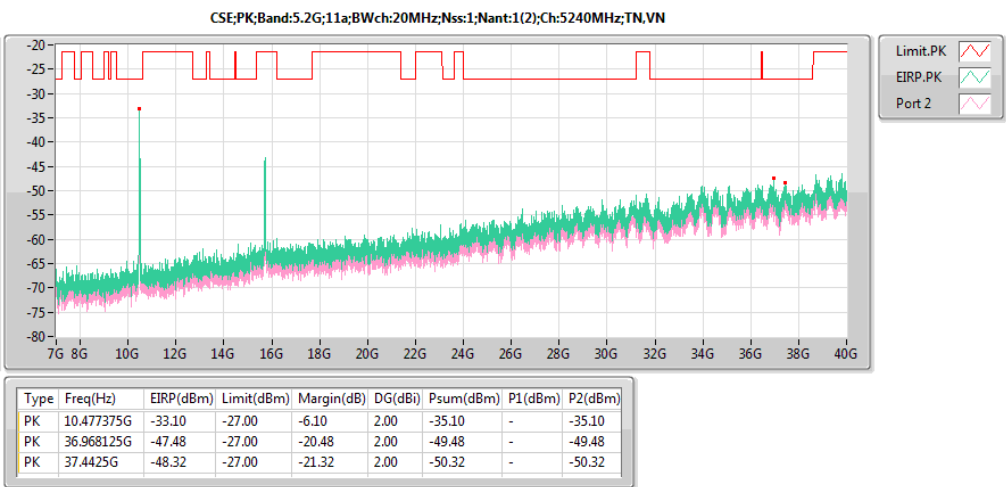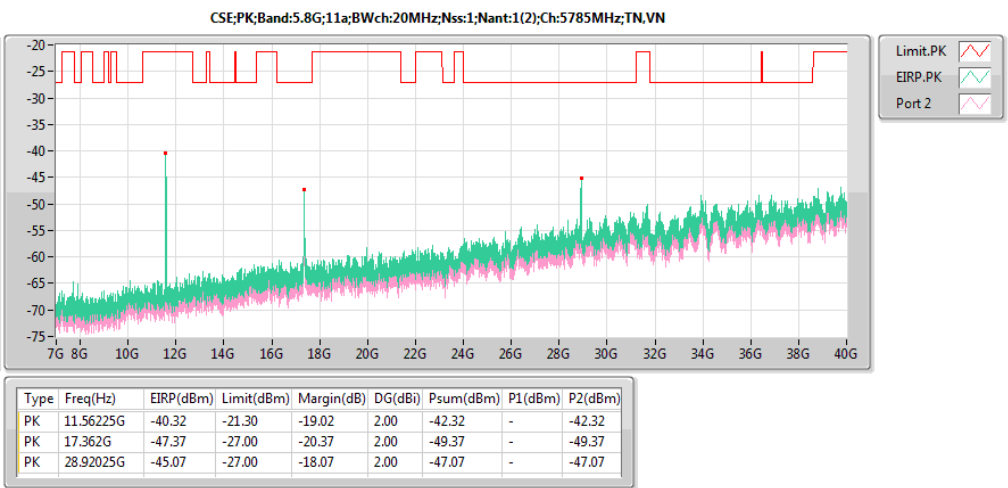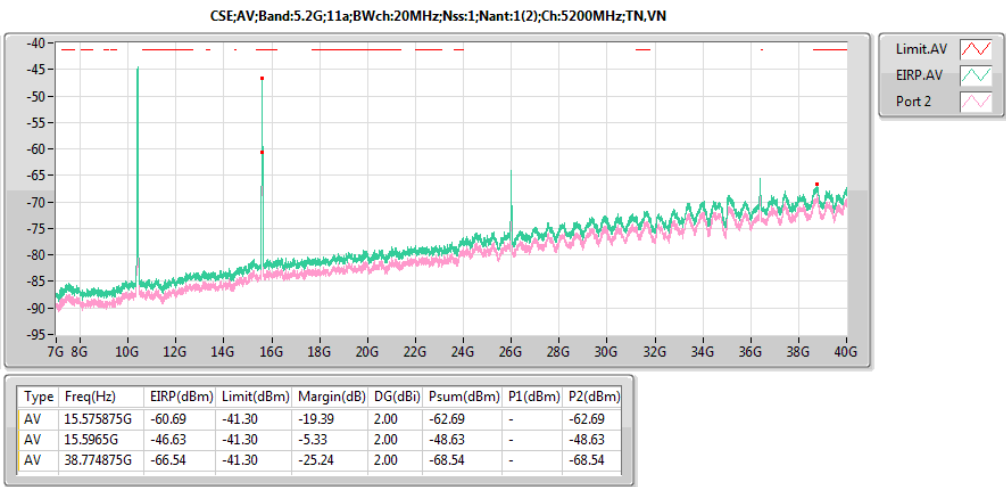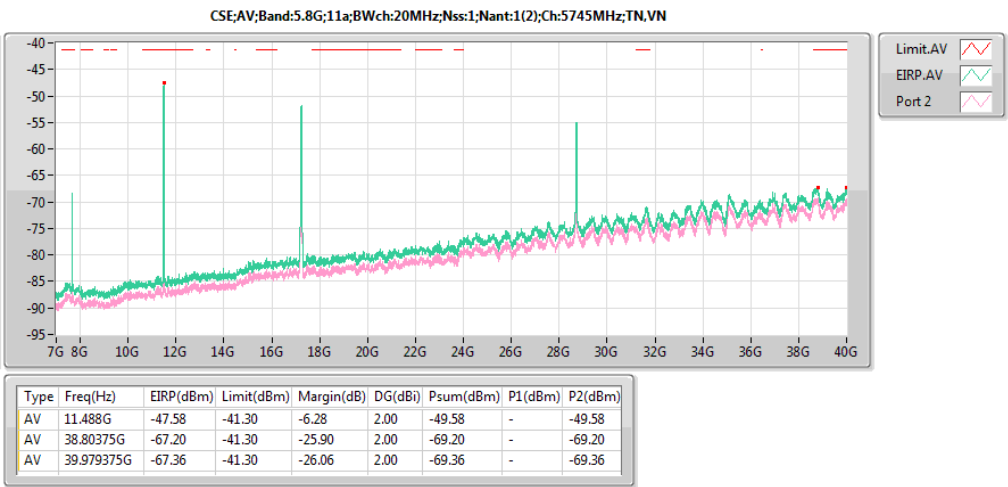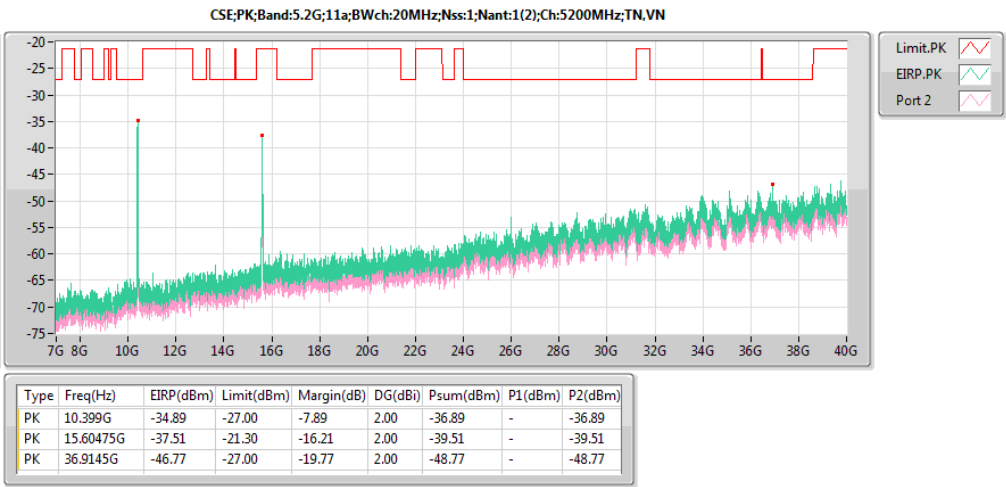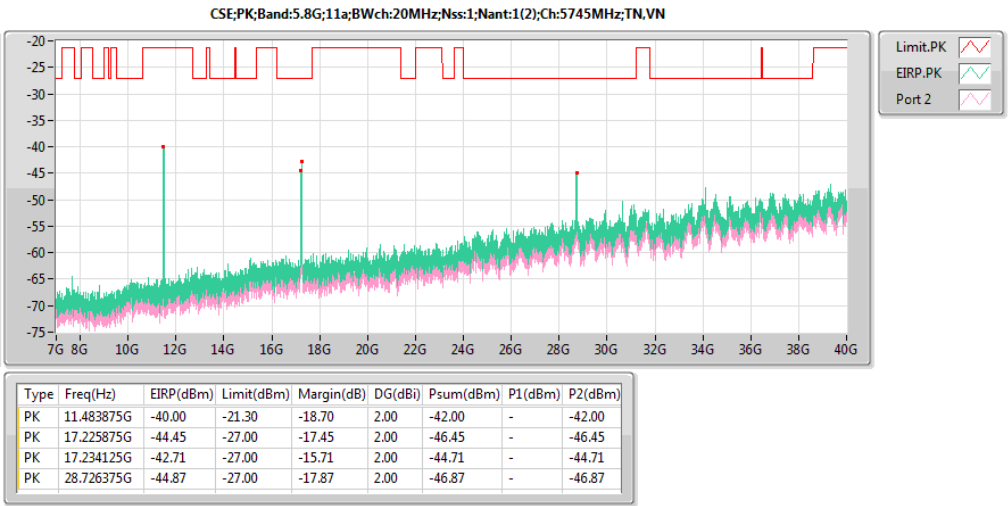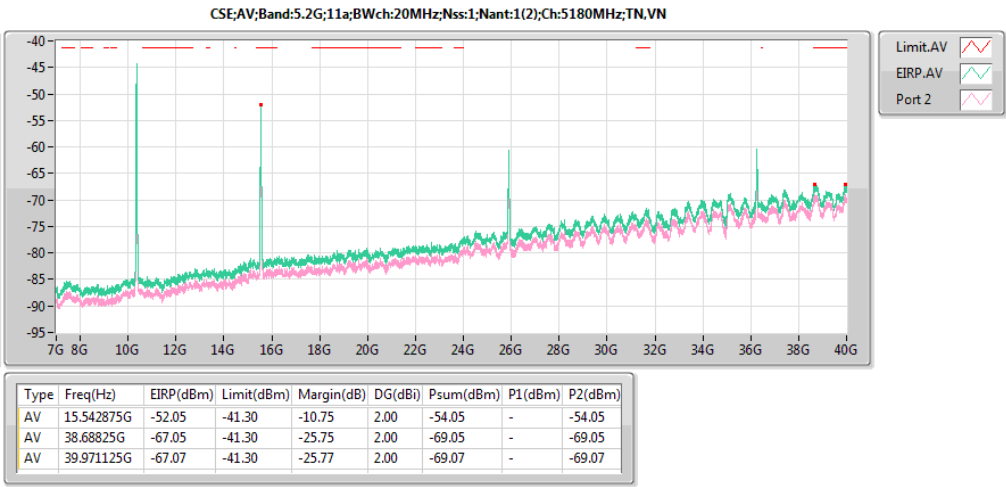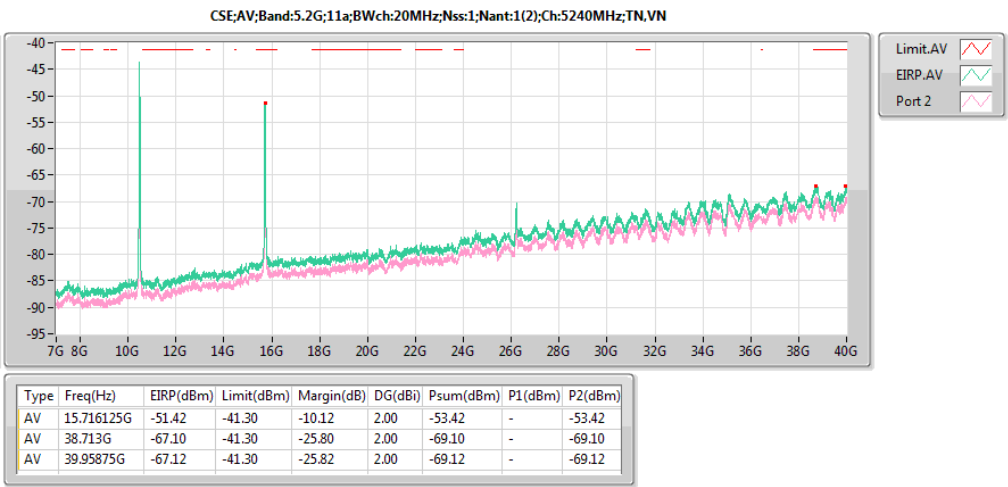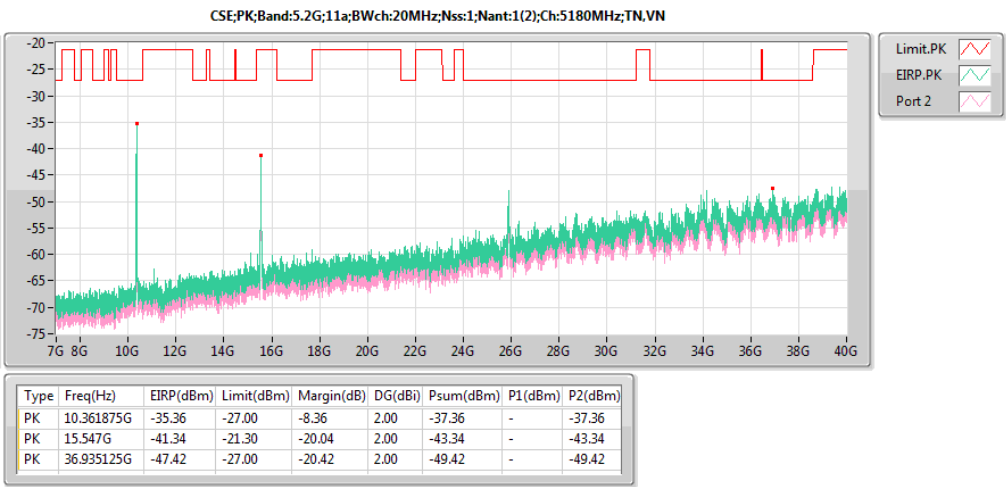



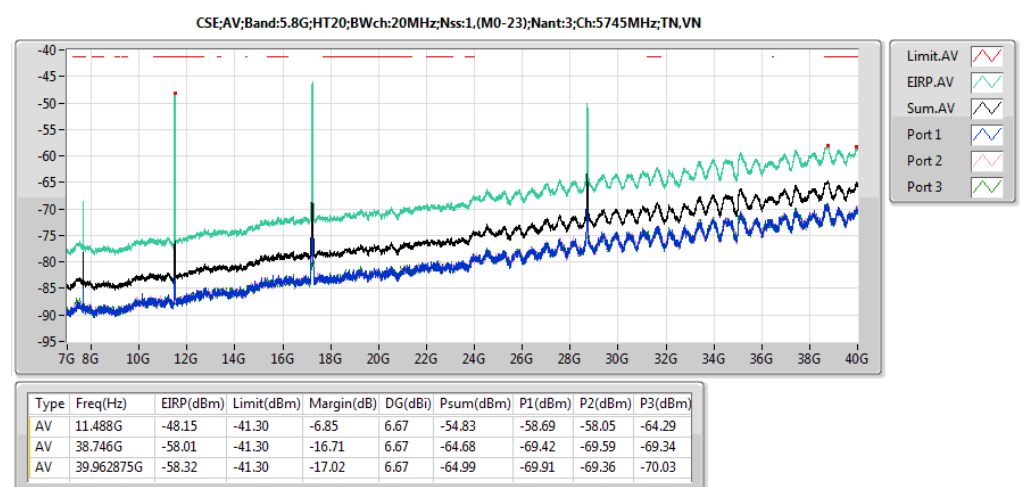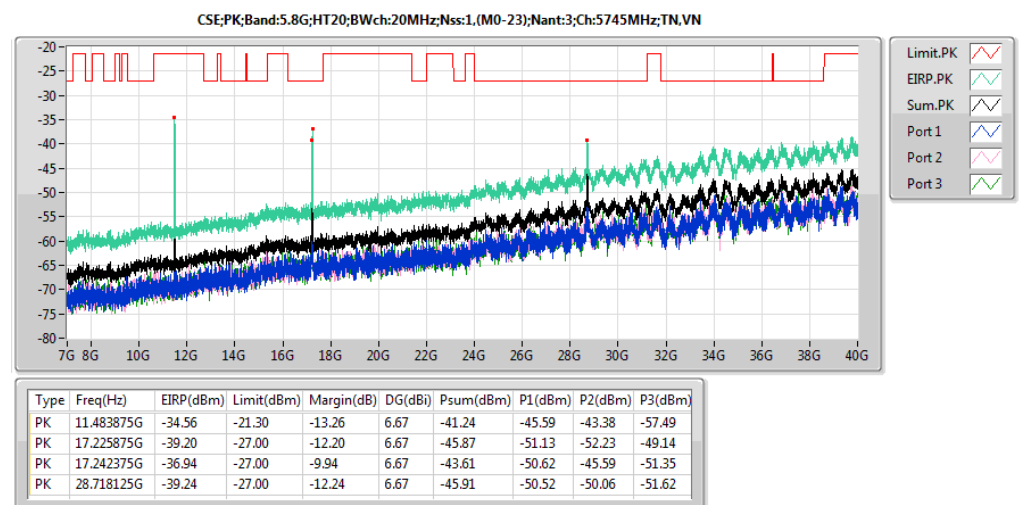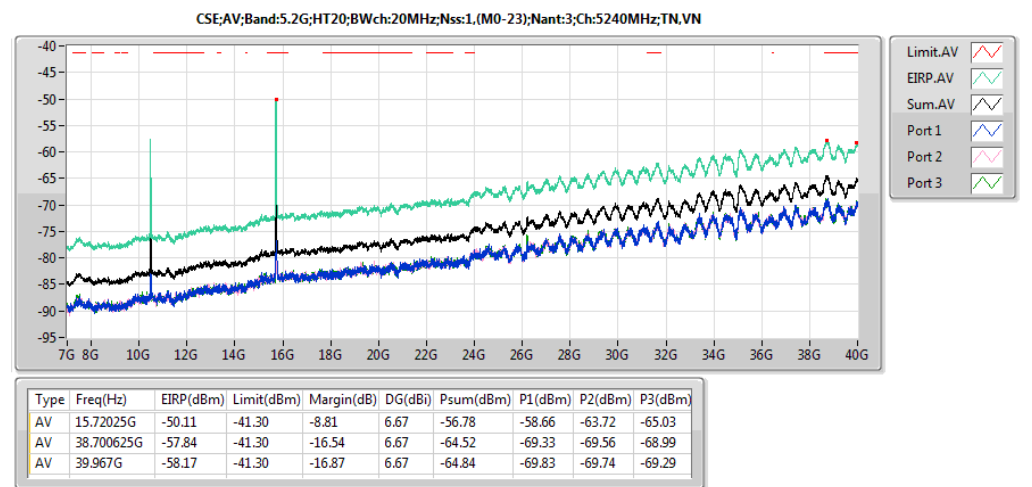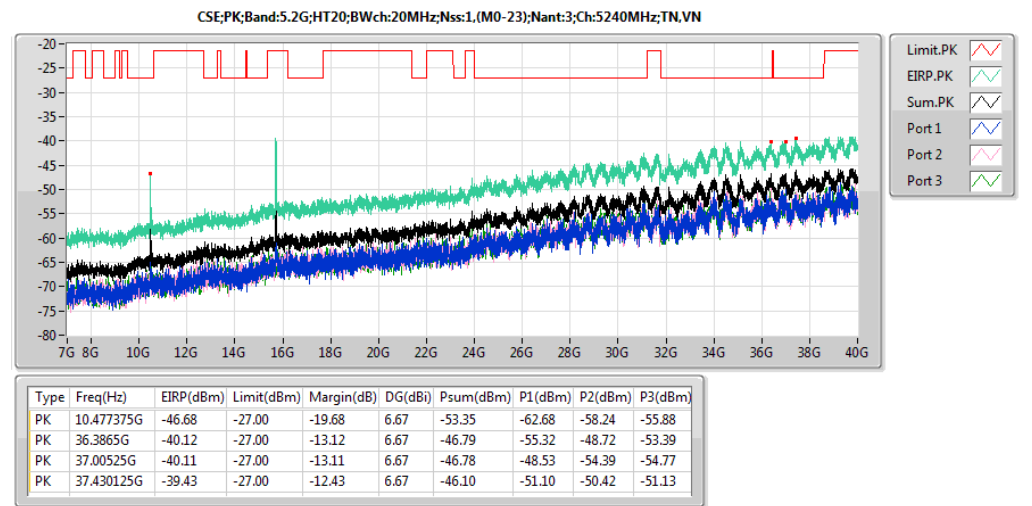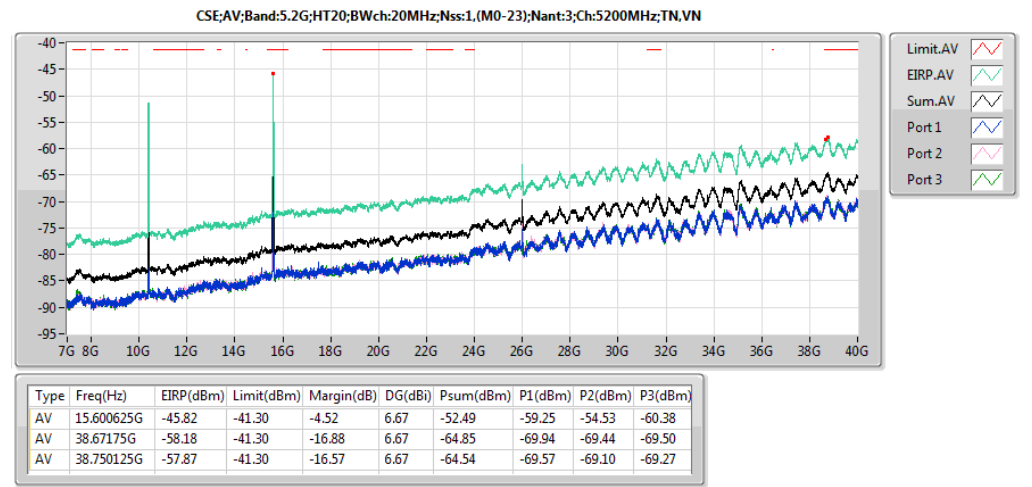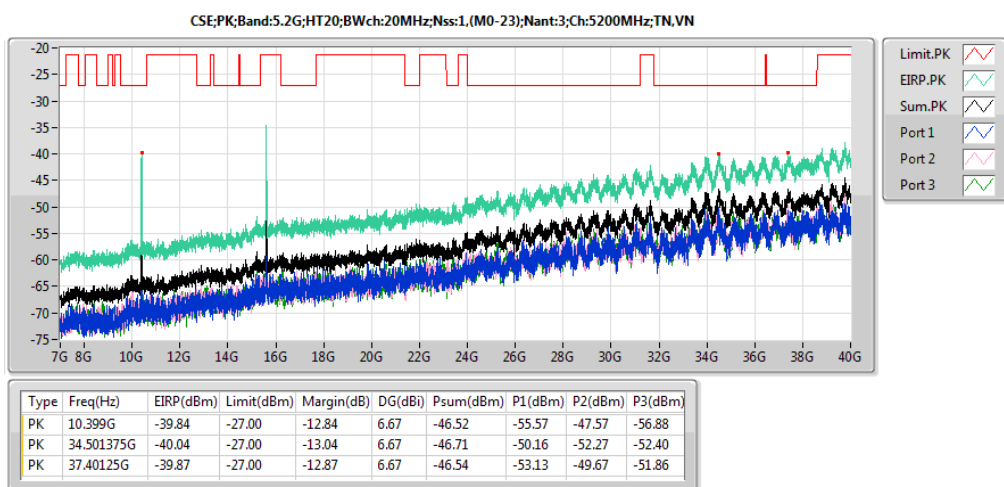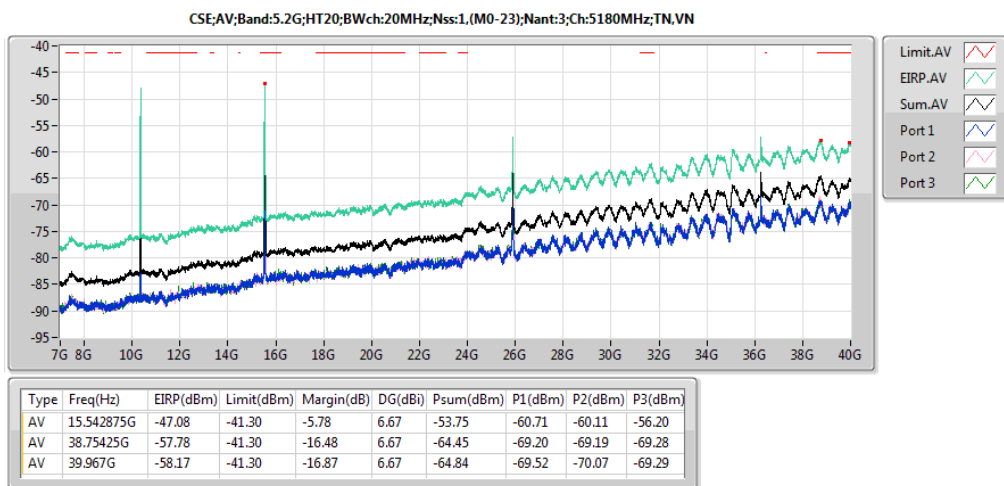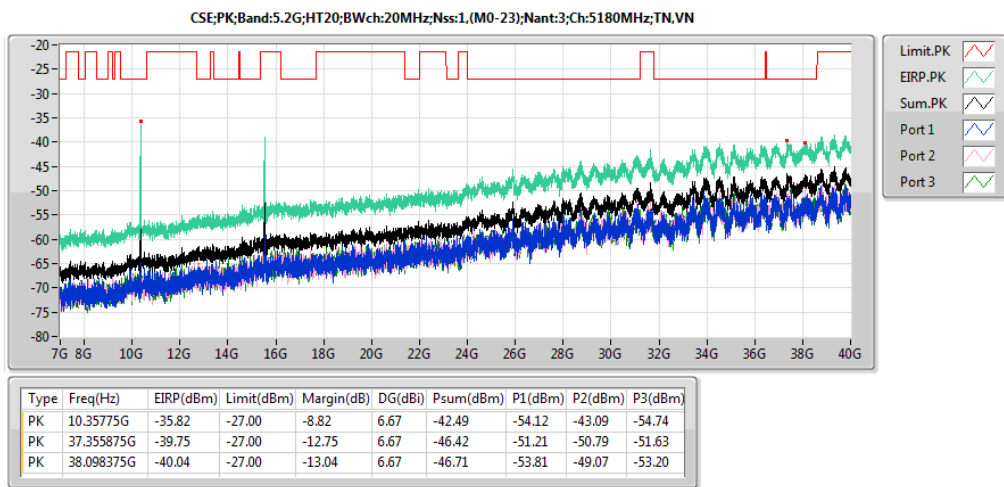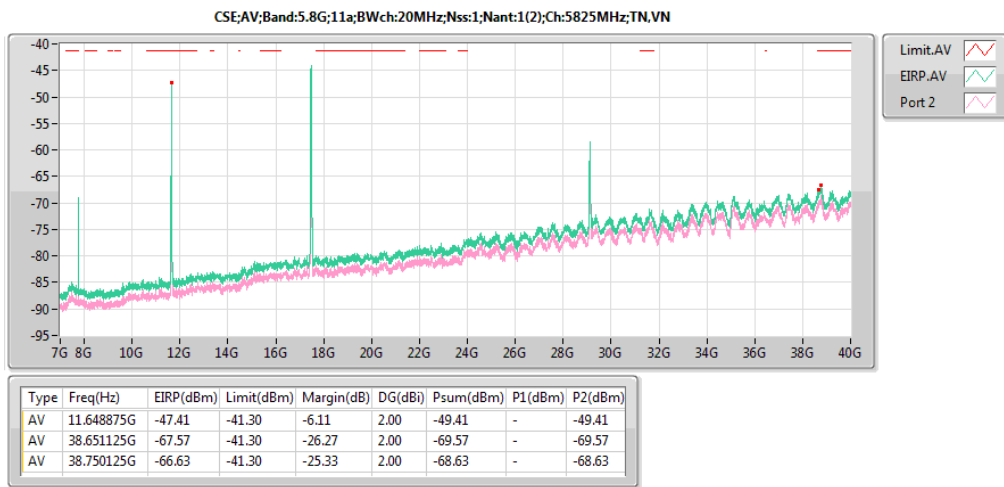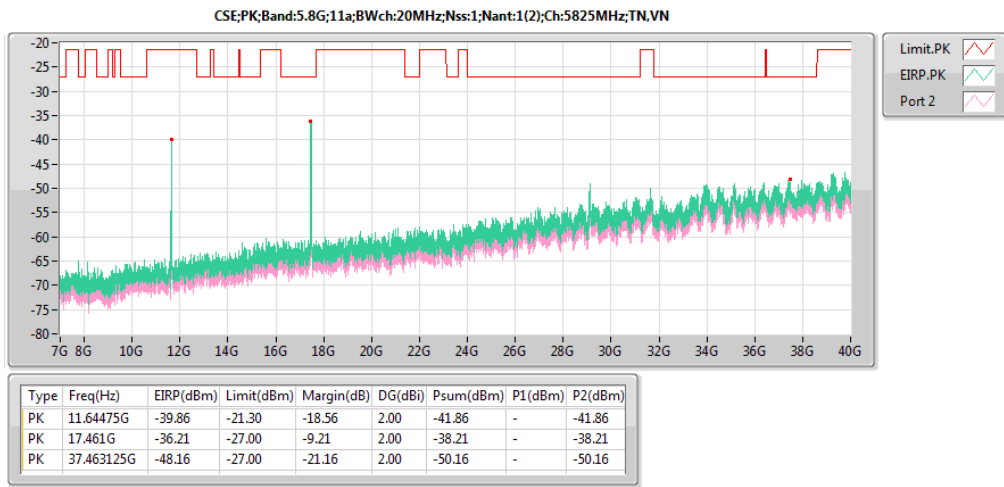


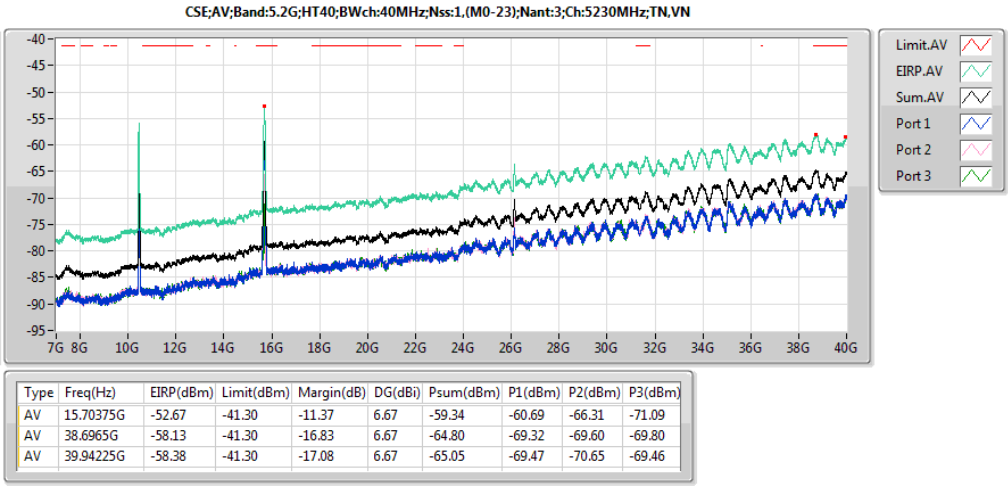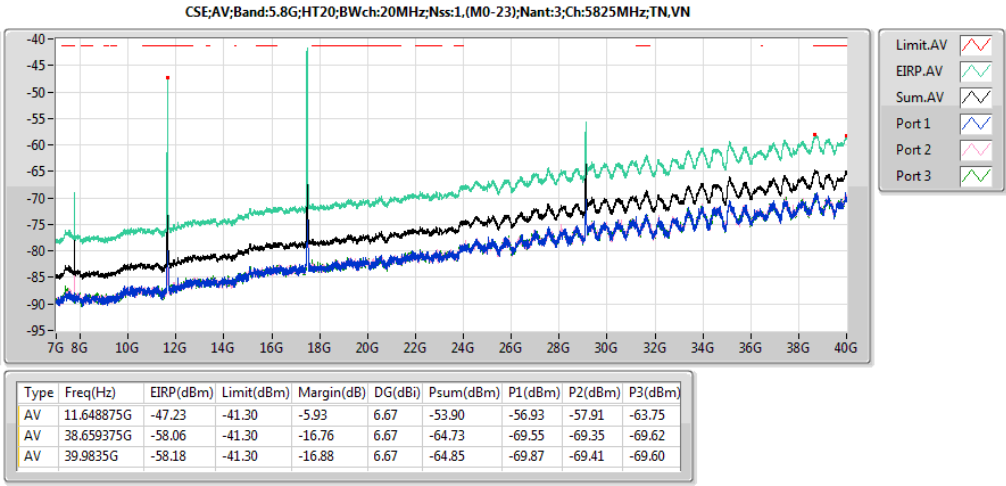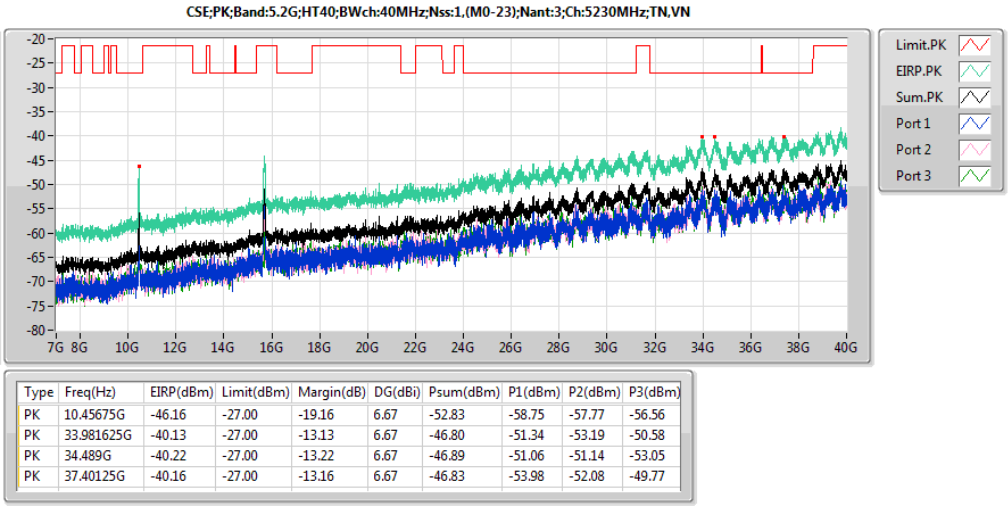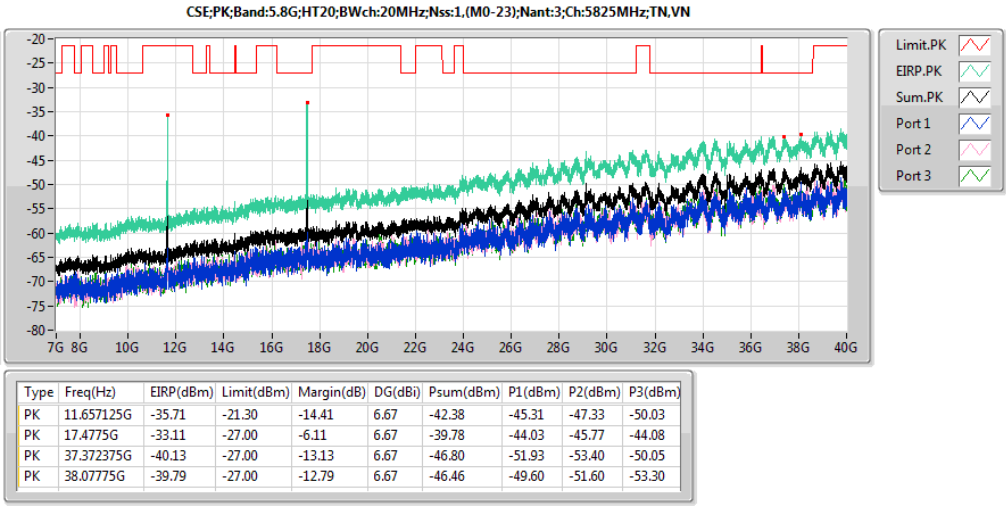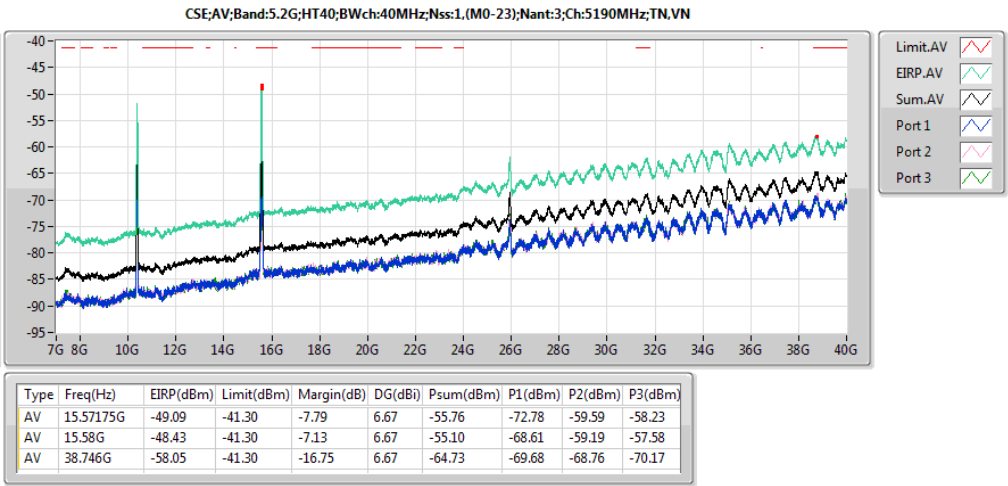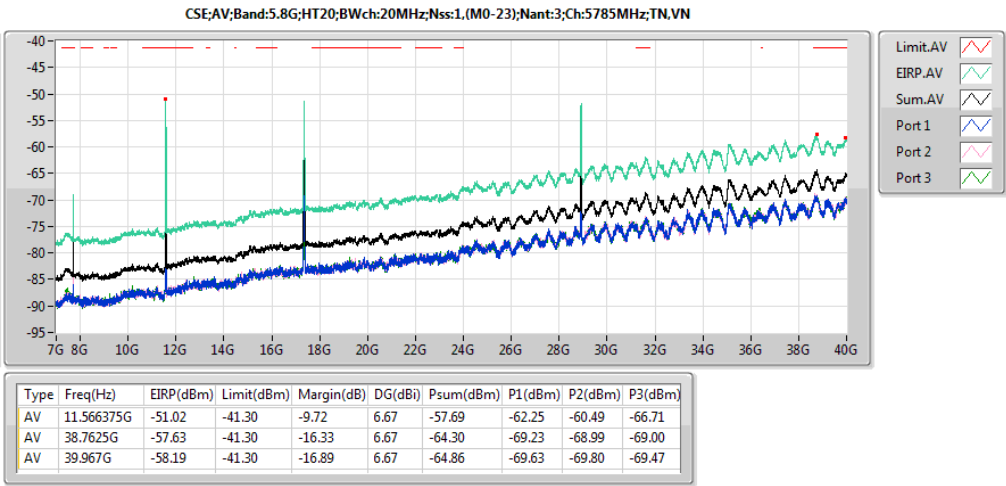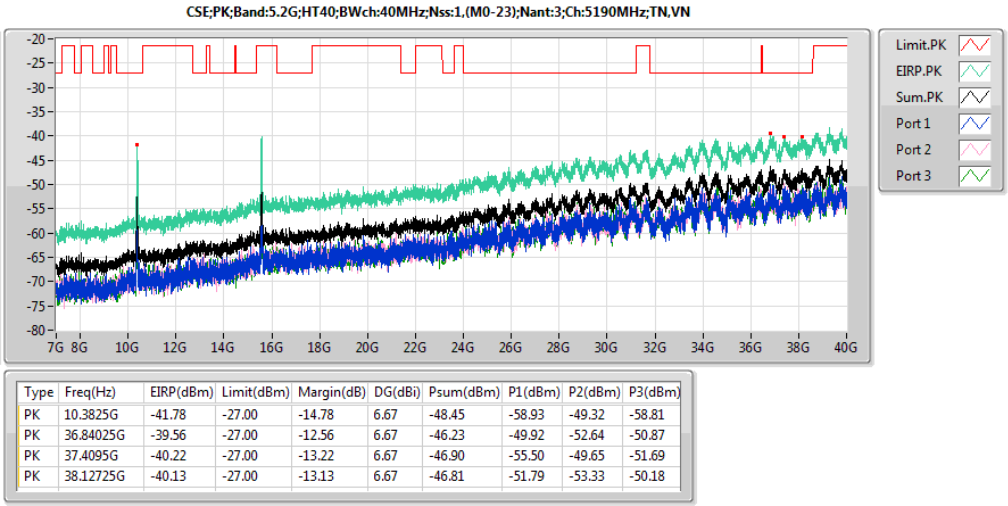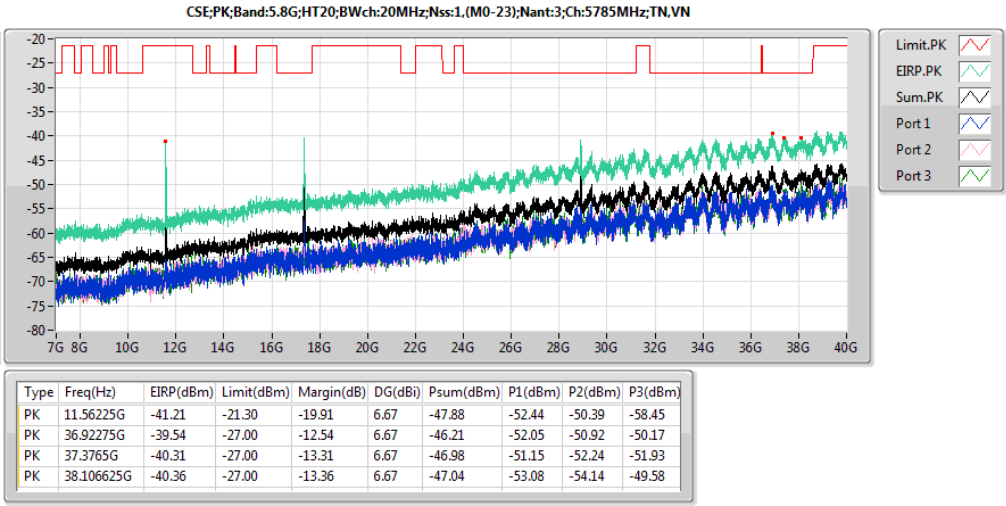

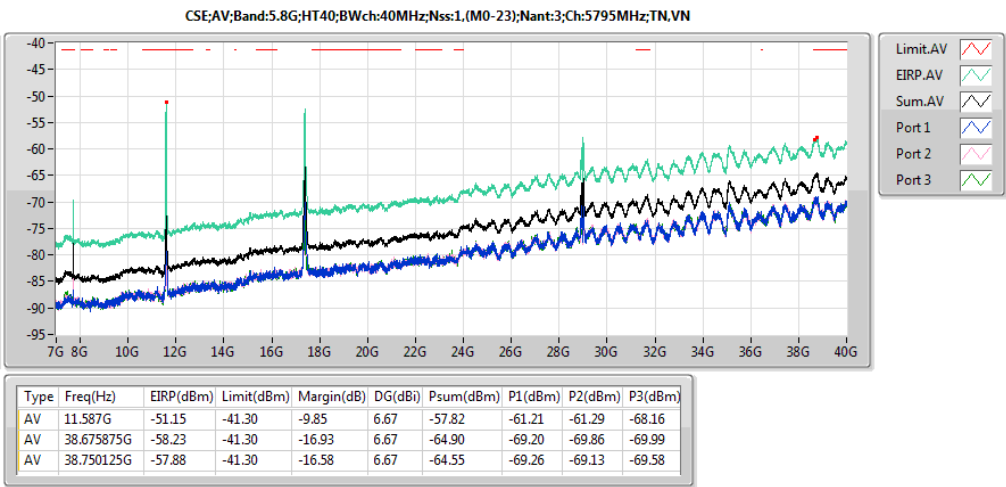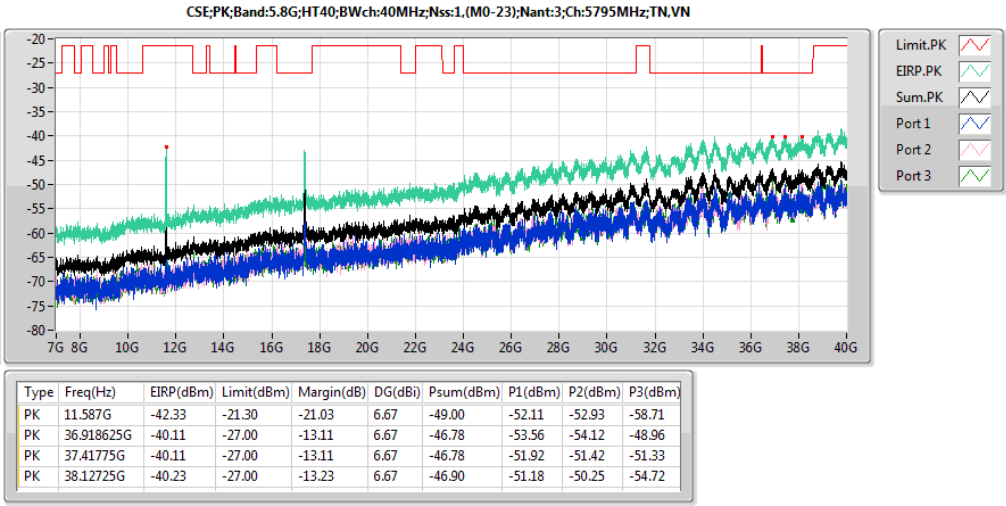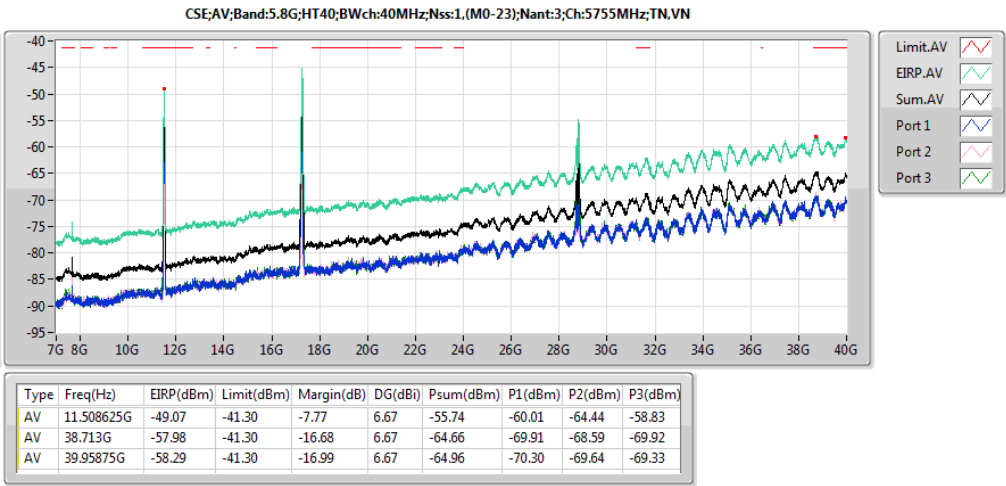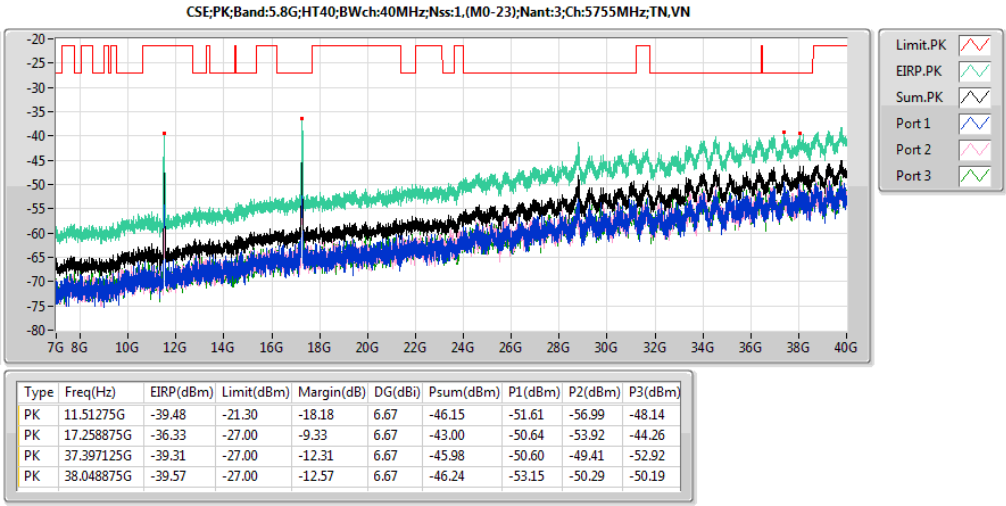




### Transmitter Radiated Unwanted Emissions (Below 1GHz)
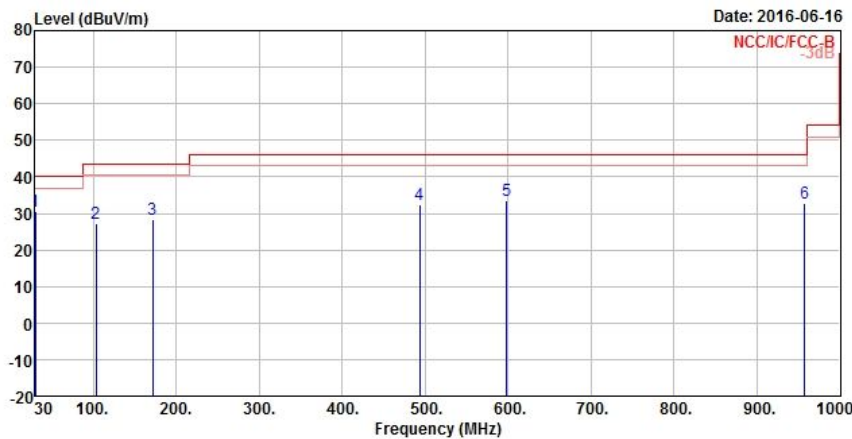
| Transmitter Radiated Unwanted Emissions (Below 1GHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |        |            |              |                   |                   |        |            |  |      |       |            |            |                   |                   |        |        |  |     |        |    |        |      |      |    |    |   |        |       |       |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |          |   |         |       |        |       |       |       |      |            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------|------------|--------------|-------------------|-------------------|--------|------------|--|------|-------|------------|------------|-------------------|-------------------|--------|--------|--|-----|--------|----|--------|------|------|----|----|---|--------|-------|-------|-------|-------|-------|------|------------|---|---------|-------|--------|-------|-------|-------|------|------------|---|---------|-------|--------|-------|-------|-------|------|------------|---|---------|-------|--------|-------|-------|-------|------|------------|---|---------|-------|--------|-------|-------|-------|------|----------|---|---------|-------|--------|-------|-------|-------|------|------------|
| Operating Mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 1             |        |            | Polarization |                   | V                 |        |            |  |      |       |            |            |                   |                   |        |        |  |     |        |    |        |      |      |    |    |   |        |       |       |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |          |   |         |       |        |       |       |       |      |            |
| Operating Function                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Transmit Mode |        |            |              |                   |                   |        |            |  |      |       |            |            |                   |                   |        |        |  |     |        |    |        |      |      |    |    |   |        |       |       |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |          |   |         |       |        |       |       |       |      |            |
| <div><div><div>Level (dBuV/m)</div><div><div><div>Date: 2016-06-16</div><div>NCC/IC/FCC-B</div><div>-30dB</div></div></div><div><table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level</th><th>Cable Preamp Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>30.000</td><td>30.54</td><td>-9.46</td><td>40.00</td><td>31.69</td><td>25.62</td><td>0.78</td><td>27.55 Peak</td></tr><tr><td>2</td><td>103.720</td><td>27.38</td><td>-16.12</td><td>43.50</td><td>35.43</td><td>17.74</td><td>1.58</td><td>27.37 Peak</td></tr><tr><td>3</td><td>171.620</td><td>28.43</td><td>-15.07</td><td>43.50</td><td>37.52</td><td>15.89</td><td>2.07</td><td>27.05 Peak</td></tr><tr><td>4</td><td>493.660</td><td>32.43</td><td>-13.57</td><td>46.00</td><td>32.92</td><td>23.70</td><td>3.54</td><td>27.73 Peak</td></tr><tr><td>5</td><td>598.420</td><td>33.54</td><td>-12.46</td><td>46.00</td><td>32.67</td><td>24.83</td><td>4.06</td><td>28.02 QP</td></tr><tr><td>6</td><td>957.320</td><td>32.60</td><td>-13.40</td><td>46.00</td><td>26.80</td><td>27.98</td><td>5.19</td><td>27.37 Peak</td></tr></table></div></div></div> |               |        |            |              |                   |                   |        |            |  | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Cable Preamp Loss | Factor | Remark |  | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | 1 | 30.000 | 30.54 | -9.46 | 40.00 | 31.69 | 25.62 | 0.78 | 27.55 Peak | 2 | 103.720 | 27.38 | -16.12 | 43.50 | 35.43 | 17.74 | 1.58 | 27.37 Peak | 3 | 171.620 | 28.43 | -15.07 | 43.50 | 37.52 | 15.89 | 2.07 | 27.05 Peak | 4 | 493.660 | 32.43 | -13.57 | 46.00 | 32.92 | 23.70 | 3.54 | 27.73 Peak | 5 | 598.420 | 33.54 | -12.46 | 46.00 | 32.67 | 24.83 | 4.06 | 28.02 QP | 6 | 957.320 | 32.60 | -13.40 | 46.00 | 26.80 | 27.98 | 5.19 | 27.37 Peak |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Freq          | Level  | Over Limit | Limit Line   | ReadAntenna Level | Cable Preamp Loss | Factor | Remark     |  |      |       |            |            |                   |                   |        |        |  |     |        |    |        |      |      |    |    |   |        |       |       |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |          |   |         |       |        |       |       |       |      |            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | MHz           | dBuV/m | dB         | dBuV/m       | dBuV              | dB/m              | dB     | dB         |  |      |       |            |            |                   |                   |        |        |  |     |        |    |        |      |      |    |    |   |        |       |       |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |          |   |         |       |        |       |       |       |      |            |
| 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 30.000        | 30.54  | -9.46      | 40.00        | 31.69             | 25.62             | 0.78   | 27.55 Peak |  |      |       |            |            |                   |                   |        |        |  |     |        |    |        |      |      |    |    |   |        |       |       |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |          |   |         |       |        |       |       |       |      |            |
| 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 103.720       | 27.38  | -16.12     | 43.50        | 35.43             | 17.74             | 1.58   | 27.37 Peak |  |      |       |            |            |                   |                   |        |        |  |     |        |    |        |      |      |    |    |   |        |       |       |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |          |   |         |       |        |       |       |       |      |            |
| 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 171.620       | 28.43  | -15.07     | 43.50        | 37.52             | 15.89             | 2.07   | 27.05 Peak |  |      |       |            |            |                   |                   |        |        |  |     |        |    |        |      |      |    |    |   |        |       |       |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |          |   |         |       |        |       |       |       |      |            |
| 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 493.660       | 32.43  | -13.57     | 46.00        | 32.92             | 23.70             | 3.54   | 27.73 Peak |  |      |       |            |            |                   |                   |        |        |  |     |        |    |        |      |      |    |    |   |        |       |       |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |          |   |         |       |        |       |       |       |      |            |
| 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 598.420       | 33.54  | -12.46     | 46.00        | 32.67             | 24.83             | 4.06   | 28.02 QP   |  |      |       |            |            |                   |                   |        |        |  |     |        |    |        |      |      |    |    |   |        |       |       |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |          |   |         |       |        |       |       |       |      |            |
| 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 957.320       | 32.60  | -13.40     | 46.00        | 26.80             | 27.98             | 5.19   | 27.37 Peak |  |      |       |            |            |                   |                   |        |        |  |     |        |    |        |      |      |    |    |   |        |       |       |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |          |   |         |       |        |       |       |       |      |            |
| <div>Note 1: "&gt;20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.<br/>Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)<br/>Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).<br/>Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.</div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |               |        |            |              |                   |                   |        |            |  |      |       |            |            |                   |                   |        |        |  |     |        |    |        |      |      |    |    |   |        |       |       |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |            |   |         |       |        |       |       |       |      |          |   |         |       |        |       |       |       |      |            |

### Transmitter Radiated Unwanted Emissions (Below 1GHz)

|                    |               |              |   |
|--------------------|---------------|--------------|---|
| Operating Mode     | 1             | Polarization | H |
| Operating Function | Transmit Mode |              |   |

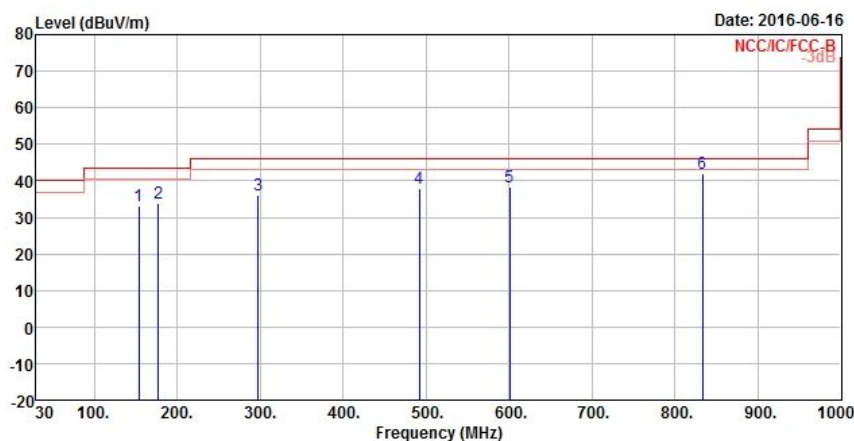

|   | Freq    | Level  | Over Limit | Limit Line | ReadAntenna Level | Cable Preamp Loss | Factor | Remark     |
|---|---------|--------|------------|------------|-------------------|-------------------|--------|------------|
|   | MHz     | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m              | dB     | dB         |
| 1 | 154.160 | 33.13  | -10.37     | 43.50      | 41.61             | 16.72             | 1.94   | 27.14 Peak |
| 2 | 177.440 | 33.69  | -9.81      | 43.50      | 42.94             | 15.67             | 2.11   | 27.03 Peak |
| 3 | 297.720 | 35.91  | -10.09     | 46.00      | 40.29             | 19.73             | 2.60   | 26.71 Peak |
| 4 | 491.720 | 37.91  | -8.09      | 46.00      | 38.43             | 23.66             | 3.53   | 27.71 Peak |
| 5 | 600.360 | 38.42  | -7.58      | 46.00      | 37.53             | 24.84             | 4.07   | 28.02 Peak |
| 6 | 833.160 | 42.08  | -3.92      | 46.00      | 38.15             | 26.97             | 4.65   | 27.69 Peak |


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).


Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5150-5250MHz
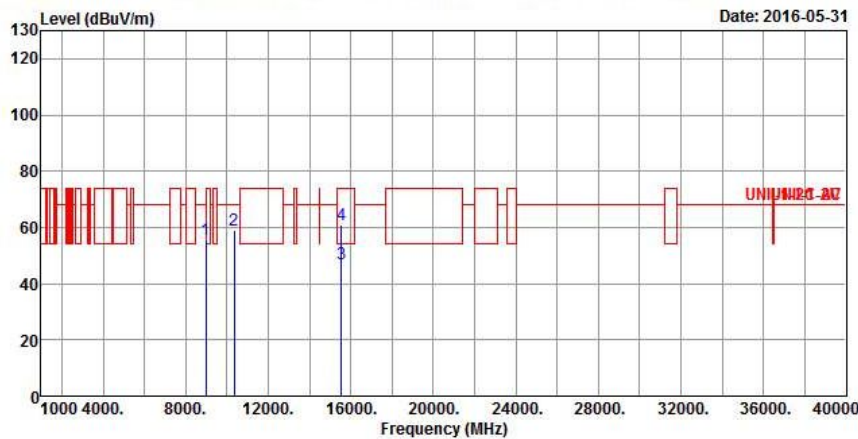
| Transmitter Radiated Unwanted Emissions (Above 1GHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |           |        |        |        |                  |       |        |               |  |      |       |      |       |             |       |        |  |  |     |        |       |      |       |      |        |        |  |  |  |    |        |      |      |    |    |   |          |       |        |       |       |       |      |            |   |           |       |       |       |       |       |      |            |   |           |       |       |       |       |       |       |               |   |           |       |        |       |       |       |       |            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--------|--------|--------|------------------|-------|--------|---------------|--|------|-------|------|-------|-------------|-------|--------|--|--|-----|--------|-------|------|-------|------|--------|--------|--|--|--|----|--------|------|------|----|----|---|----------|-------|--------|-------|-------|-------|------|------------|---|-----------|-------|-------|-------|-------|-------|------|------------|---|-----------|-------|-------|-------|-------|-------|-------|---------------|---|-----------|-------|--------|-------|-------|-------|-------|------------|
| Modulation Mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 11a       |        |        |        | Test Freq. (MHz) | 5180  |        |               |  |      |       |      |       |             |       |        |  |  |     |        |       |      |       |      |        |        |  |  |  |    |        |      |      |    |    |   |          |       |        |       |       |       |      |            |   |           |       |       |       |       |       |      |            |   |           |       |       |       |       |       |       |               |   |           |       |        |       |       |       |       |            |
| N <sub>TX</sub>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 1         |        |        |        | Polarization     | V     |        |               |  |      |       |      |       |             |       |        |  |  |     |        |       |      |       |      |        |        |  |  |  |    |        |      |      |    |    |   |          |       |        |       |       |       |      |            |   |           |       |       |       |       |       |      |            |   |           |       |       |       |       |       |       |               |   |           |       |        |       |       |       |       |            |
| <div><div><div>Level (dBuV/m)</div><div>Date: 2016-05-31</div><div>Frequency (MHz)</div></div><table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>Limit</th><th>Line</th><th>Level</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th></th><th></th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>8990.000</td><td>55.58</td><td>-12.62</td><td>68.20</td><td>43.36</td><td>37.29</td><td>8.03</td><td>33.10 Peak</td></tr><tr><td>2</td><td>10360.000</td><td>59.12</td><td>-9.08</td><td>68.20</td><td>44.31</td><td>39.23</td><td>8.47</td><td>32.89 Peak</td></tr><tr><td>3</td><td>15540.000</td><td>47.13</td><td>-6.87</td><td>54.00</td><td>30.76</td><td>38.30</td><td>10.41</td><td>32.34 Average</td></tr><tr><td>4</td><td>15540.000</td><td>60.97</td><td>-13.03</td><td>74.00</td><td>44.60</td><td>38.30</td><td>10.41</td><td>32.34 Peak</td></tr></table></div> |           |        |        |        |                  |       |        |               |  | Freq | Level | Over | Limit | ReadAntenna | Cable | Preamp |  |  | MHz | dBuV/m | Limit | Line | Level | Loss | Factor | Remark |  |  |  | dB | dBuV/m | dBuV | dB/m | dB | dB | 1 | 8990.000 | 55.58 | -12.62 | 68.20 | 43.36 | 37.29 | 8.03 | 33.10 Peak | 2 | 10360.000 | 59.12 | -9.08 | 68.20 | 44.31 | 39.23 | 8.47 | 32.89 Peak | 3 | 15540.000 | 47.13 | -6.87 | 54.00 | 30.76 | 38.30 | 10.41 | 32.34 Average | 4 | 15540.000 | 60.97 | -13.03 | 74.00 | 44.60 | 38.30 | 10.41 | 32.34 Peak |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Freq      | Level  | Over   | Limit  | ReadAntenna      | Cable | Preamp |               |  |      |       |      |       |             |       |        |  |  |     |        |       |      |       |      |        |        |  |  |  |    |        |      |      |    |    |   |          |       |        |       |       |       |      |            |   |           |       |       |       |       |       |      |            |   |           |       |       |       |       |       |       |               |   |           |       |        |       |       |       |       |            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | MHz       | dBuV/m | Limit  | Line   | Level            | Loss  | Factor | Remark        |  |      |       |      |       |             |       |        |  |  |     |        |       |      |       |      |        |        |  |  |  |    |        |      |      |    |    |   |          |       |        |       |       |       |      |            |   |           |       |       |       |       |       |      |            |   |           |       |       |       |       |       |       |               |   |           |       |        |       |       |       |       |            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |           |        | dB     | dBuV/m | dBuV             | dB/m  | dB     | dB            |  |      |       |      |       |             |       |        |  |  |     |        |       |      |       |      |        |        |  |  |  |    |        |      |      |    |    |   |          |       |        |       |       |       |      |            |   |           |       |       |       |       |       |      |            |   |           |       |       |       |       |       |       |               |   |           |       |        |       |       |       |       |            |
| 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 8990.000  | 55.58  | -12.62 | 68.20  | 43.36            | 37.29 | 8.03   | 33.10 Peak    |  |      |       |      |       |             |       |        |  |  |     |        |       |      |       |      |        |        |  |  |  |    |        |      |      |    |    |   |          |       |        |       |       |       |      |            |   |           |       |       |       |       |       |      |            |   |           |       |       |       |       |       |       |               |   |           |       |        |       |       |       |       |            |
| 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 10360.000 | 59.12  | -9.08  | 68.20  | 44.31            | 39.23 | 8.47   | 32.89 Peak    |  |      |       |      |       |             |       |        |  |  |     |        |       |      |       |      |        |        |  |  |  |    |        |      |      |    |    |   |          |       |        |       |       |       |      |            |   |           |       |       |       |       |       |      |            |   |           |       |       |       |       |       |       |               |   |           |       |        |       |       |       |       |            |
| 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 15540.000 | 47.13  | -6.87  | 54.00  | 30.76            | 38.30 | 10.41  | 32.34 Average |  |      |       |      |       |             |       |        |  |  |     |        |       |      |       |      |        |        |  |  |  |    |        |      |      |    |    |   |          |       |        |       |       |       |      |            |   |           |       |       |       |       |       |      |            |   |           |       |       |       |       |       |       |               |   |           |       |        |       |       |       |       |            |
| 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 15540.000 | 60.97  | -13.03 | 74.00  | 44.60            | 38.30 | 10.41  | 32.34 Peak    |  |      |       |      |       |             |       |        |  |  |     |        |       |      |       |      |        |        |  |  |  |    |        |      |      |    |    |   |          |       |        |       |       |       |      |            |   |           |       |       |       |       |       |      |            |   |           |       |       |       |       |       |       |               |   |           |       |        |       |       |       |       |            |
| <div>Note 1: "&gt;20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</div> <div>Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)</div> <div>Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</div> <div>Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</div> <div>Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.</div> <div>Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</div>                                                                                                                                                                                                                                                                                                                           |           |        |        |        |                  |       |        |               |  |      |       |      |       |             |       |        |  |  |     |        |       |      |       |      |        |        |  |  |  |    |        |      |      |    |    |   |          |       |        |       |       |       |      |            |   |           |       |       |       |       |       |      |            |   |           |       |       |       |       |       |       |               |   |           |       |        |       |       |       |       |            |

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |     |                  |      |
|-----------------|-----|------------------|------|
| Modulation Mode | 11a | Test Freq. (MHz) | 5180 |
| N <sub>TX</sub> | 1   | Polarization     | H    |

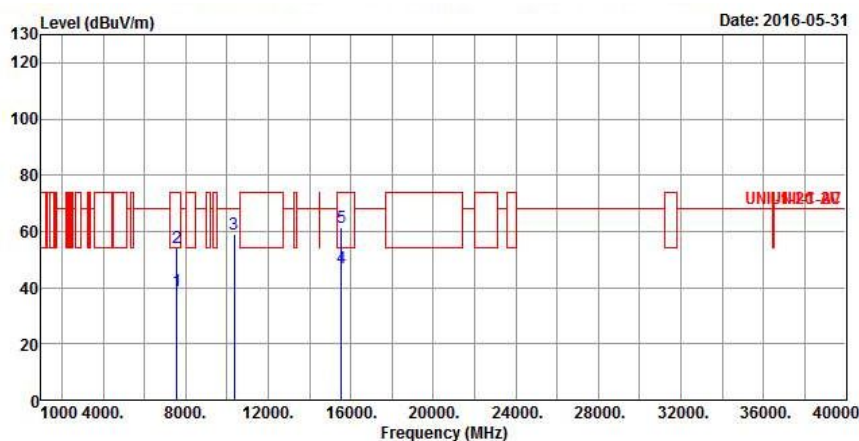

|   | Freq      | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp |               |
|---|-----------|--------|--------|--------|-------------|-------|--------|---------------|
|   | MHz       | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Remark        |
|   |           |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB            |
| 1 | 7572.000  | 38.79  | -15.21 | 54.00  | 28.11       | 36.42 | 7.13   | 32.87 Average |
| 2 | 7572.000  | 54.19  | -19.81 | 74.00  | 43.51       | 36.42 | 7.13   | 32.87 Peak    |
| 3 | 10360.000 | 58.83  | -9.37  | 68.20  | 44.02       | 39.23 | 8.47   | 32.89 Peak    |
| 4 | 15540.000 | 47.15  | -6.85  | 54.00  | 30.78       | 38.30 | 10.41  | 32.34 Average |
| 5 | 15540.000 | 61.60  | -12.40 | 74.00  | 45.23       | 38.30 | 10.41  | 32.34 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |     |                  |      |
|-----------------|-----|------------------|------|
| Modulation Mode | 11a | Test Freq. (MHz) | 5200 |
| N <sub>TX</sub> | 1   | Polarization     | V    |

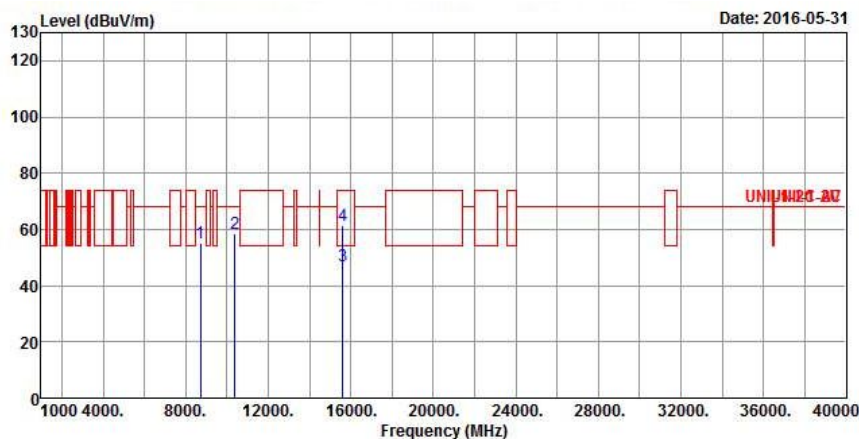

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Cable Loss | Preamp Factor | Remark        |
|---|-----------|--------|------------|------------|-------------------|------------|---------------|---------------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m       | dB            | dB            |
| 1 | 8714.000  | 55.32  | -12.88     | 68.20      | 43.55             | 36.96      | 7.83          | 33.02 Peak    |
| 2 | 10400.000 | 58.71  | -9.49      | 68.20      | 43.79             | 39.28      | 8.49          | 32.85 Peak    |
| 3 | 15600.000 | 46.94  | -7.06      | 54.00      | 30.62             | 38.16      | 10.52         | 32.36 Average |
| 4 | 15600.000 | 61.47  | -12.53     | 74.00      | 45.15             | 38.16      | 10.52         | 32.36 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |     |                  |      |
|-----------------|-----|------------------|------|
| Modulation Mode | 11a | Test Freq. (MHz) | 5200 |
| N <sub>TX</sub> | 1   | Polarization     | H    |

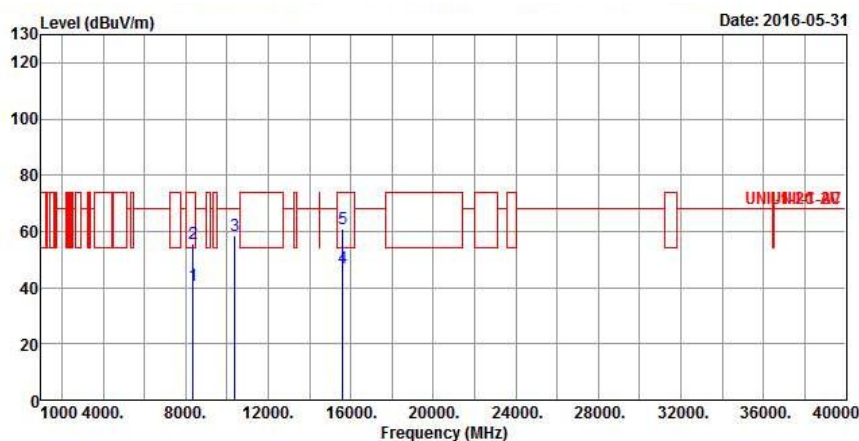

|   | Freq      | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp |               |
|---|-----------|--------|--------|--------|-------------|-------|--------|---------------|
|   | MHz       | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Remark        |
|   |           |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB            |
| 1 | 8375.000  | 40.72  | -13.28 | 54.00  | 29.13       | 36.80 | 7.73   | 32.94 Average |
| 2 | 8375.000  | 55.70  | -18.30 | 74.00  | 44.11       | 36.80 | 7.73   | 32.94 Peak    |
| 3 | 10400.000 | 58.65  | -9.55  | 68.20  | 43.73       | 39.28 | 8.49   | 32.85 Peak    |
| 4 | 15600.000 | 46.96  | -7.04  | 54.00  | 30.64       | 38.16 | 10.52  | 32.36 Average |
| 5 | 15600.000 | 60.98  | -13.02 | 74.00  | 44.66       | 38.16 | 10.52  | 32.36 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |     |                  |      |
|-----------------|-----|------------------|------|
| Modulation Mode | 11a | Test Freq. (MHz) | 5240 |
| N <sub>TX</sub> | 1   | Polarization     | V    |

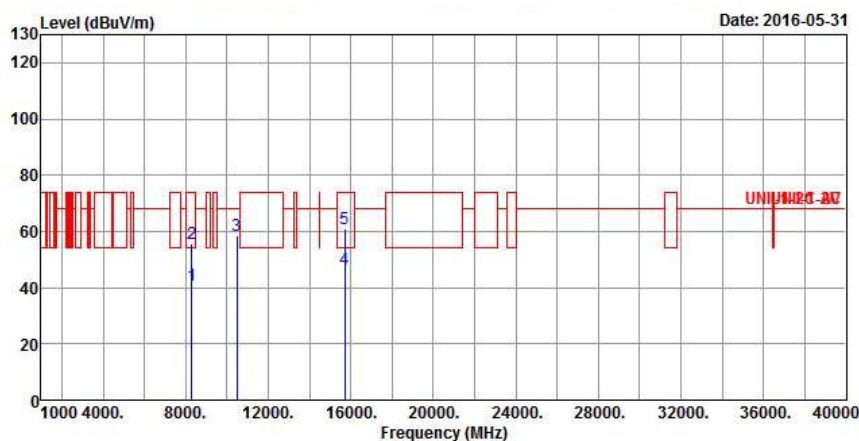

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Cable Loss | Preamplifier Factor | Remark        |
|---|-----------|--------|------------|------------|-------------------|------------|---------------------|---------------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m       | dB                  | dB            |
| 1 | 8291.000  | 40.89  | -13.11     | 54.00      | 29.30             | 36.87      | 7.66                | 32.94 Average |
| 2 | 8291.000  | 55.42  | -18.58     | 74.00      | 43.83             | 36.87      | 7.66                | 32.94 Peak    |
| 3 | 10480.000 | 58.51  | -9.69      | 68.20      | 43.36             | 39.38      | 8.55                | 32.78 Peak    |
| 4 | 15720.000 | 46.70  | -7.30      | 54.00      | 30.47             | 37.87      | 10.75               | 32.39 Average |
| 5 | 15720.000 | 61.03  | -12.97     | 74.00      | 44.80             | 37.87      | 10.75               | 32.39 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |     |                  |      |
|-----------------|-----|------------------|------|
| Modulation Mode | 11a | Test Freq. (MHz) | 5240 |
| N <sub>TX</sub> | 1   | Polarization     | H    |

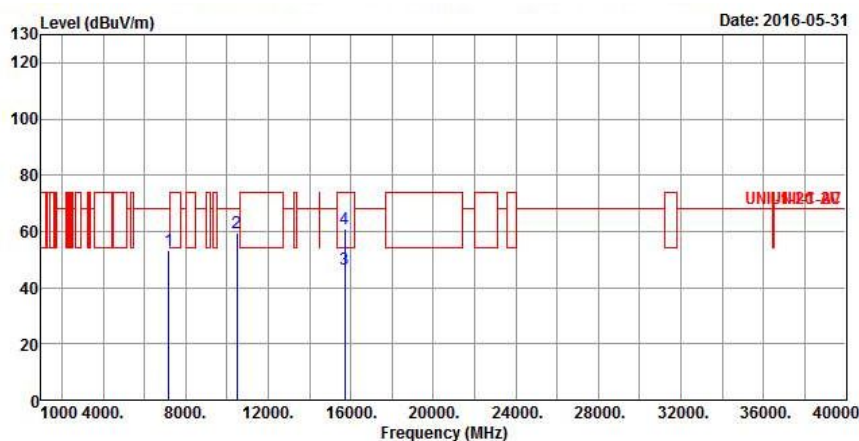

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Cable Loss | Preamp Factor | Remark        |
|---|-----------|--------|------------|------------|-------------------|------------|---------------|---------------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m       | dB            | dB            |
| 1 | 7181.000  | 53.46  | -14.74     | 68.20      | 43.64             | 35.53      | 7.05          | 32.76 Peak    |
| 2 | 10480.000 | 59.63  | -8.57      | 68.20      | 44.48             | 39.38      | 8.55          | 32.78 Peak    |
| 3 | 15720.000 | 46.61  | -7.39      | 54.00      | 30.38             | 37.87      | 10.75         | 32.39 Average |
| 4 | 15720.000 | 61.09  | -12.91     | 74.00      | 44.86             | 37.87      | 10.75         | 32.39 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |      |                  |      |
|-----------------|------|------------------|------|
| Modulation Mode | HT20 | Test Freq. (MHz) | 5180 |
| N <sub>TX</sub> | 3    | Polarization     | V    |

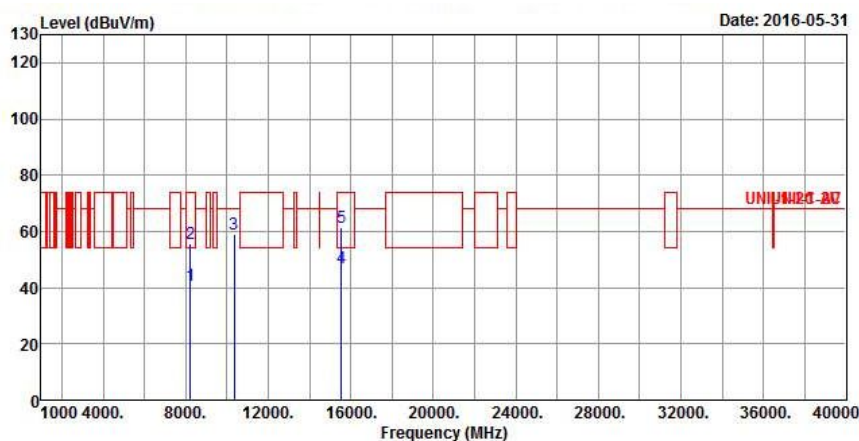

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Cable Loss | Preamplifier | Remark        |
|---|-----------|--------|------------|------------|-------------------|------------|--------------|---------------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m       | dB           | dB            |
| 1 | 8247.000  | 40.90  | -13.10     | 54.00      | 29.31             | 36.90      | 7.63         | 32.94 Average |
| 2 | 8247.000  | 55.72  | -18.28     | 74.00      | 44.13             | 36.90      | 7.63         | 32.94 Peak    |
| 3 | 10360.000 | 59.05  | -9.15      | 68.20      | 44.24             | 39.23      | 8.47         | 32.89 Peak    |
| 4 | 15540.000 | 47.04  | -6.96      | 54.00      | 30.67             | 38.30      | 10.41        | 32.34 Average |
| 5 | 15540.000 | 61.45  | -12.55     | 74.00      | 45.08             | 38.30      | 10.41        | 32.34 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |      |                  |      |
|-----------------|------|------------------|------|
| Modulation Mode | HT20 | Test Freq. (MHz) | 5180 |
| N <sub>TX</sub> | 3    | Polarization     | H    |

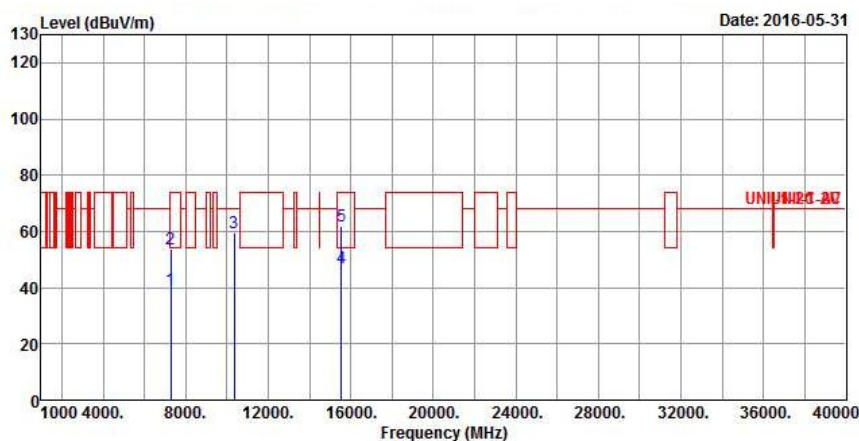

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Cable Preamp Loss | Factor | Remark        |
|---|-----------|--------|------------|------------|-------------------|-------------------|--------|---------------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m              | dB     | dB            |
| 1 | 7281.000  | 39.37  | -14.63     | 54.00      | 29.36             | 35.77             | 7.03   | 32.79 Average |
| 2 | 7281.000  | 53.84  | -20.16     | 74.00      | 43.83             | 35.77             | 7.03   | 32.79 Peak    |
| 3 | 10360.000 | 59.35  | -8.85      | 68.20      | 44.54             | 39.23             | 8.47   | 32.89 Peak    |
| 4 | 15540.000 | 47.03  | -6.97      | 54.00      | 30.66             | 38.30             | 10.41  | 32.34 Average |
| 5 | 15540.000 | 61.87  | -12.13     | 74.00      | 45.50             | 38.30             | 10.41  | 32.34 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |      |                  |      |
|-----------------|------|------------------|------|
| Modulation Mode | HT20 | Test Freq. (MHz) | 5200 |
| N <sub>TX</sub> | 3    | Polarization     | V    |

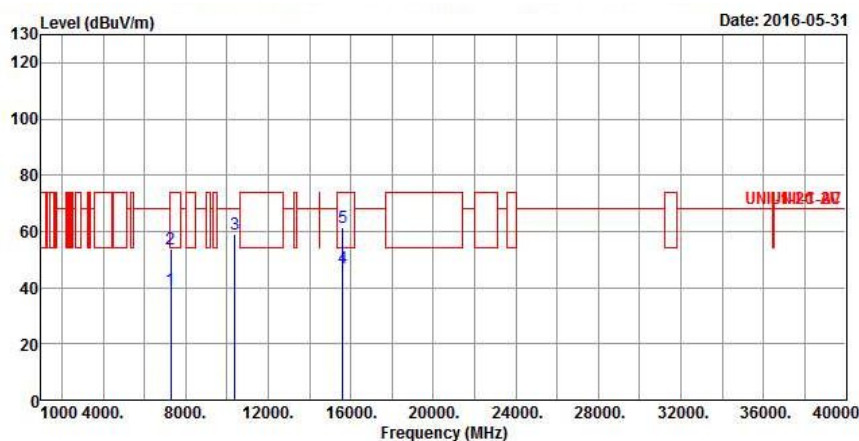

|   | Freq      | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp |               |
|---|-----------|--------|--------|--------|-------------|-------|--------|---------------|
|   | MHz       | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Remark        |
|   |           |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB            |
| 1 | 7281.000  | 39.30  | -14.70 | 54.00  | 29.29       | 35.77 | 7.03   | 32.79 Average |
| 2 | 7281.000  | 53.63  | -20.37 | 74.00  | 43.62       | 35.77 | 7.03   | 32.79 Peak    |
| 3 | 10400.000 | 58.97  | -9.23  | 68.20  | 44.05       | 39.28 | 8.49   | 32.85 Peak    |
| 4 | 15600.000 | 46.85  | -7.15  | 54.00  | 30.53       | 38.16 | 10.52  | 32.36 Average |
| 5 | 15600.000 | 61.50  | -12.50 | 74.00  | 45.18       | 38.16 | 10.52  | 32.36 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |      |                  |      |
|-----------------|------|------------------|------|
| Modulation Mode | HT20 | Test Freq. (MHz) | 5200 |
| N <sub>TX</sub> | 3    | Polarization     | H    |

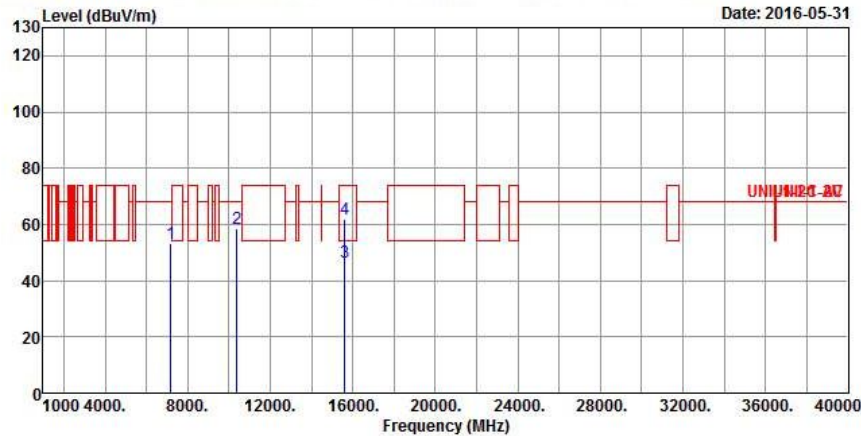

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Cable Loss | Preamp Factor | Remark        |
|---|-----------|--------|------------|------------|-------------------|------------|---------------|---------------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m       | dB            | dB            |
| 1 | 7177.000  | 53.03  | -15.17     | 68.20      | 43.22             | 35.52      | 7.05          | 32.76 Peak    |
| 2 | 10400.000 | 58.66  | -9.54      | 68.20      | 43.74             | 39.28      | 8.49          | 32.85 Peak    |
| 3 | 15600.000 | 46.76  | -7.24      | 54.00      | 30.44             | 38.16      | 10.52         | 32.36 Average |
| 4 | 15600.000 | 62.02  | -11.98     | 74.00      | 45.70             | 38.16      | 10.52         | 32.36 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |      |                  |      |
|-----------------|------|------------------|------|
| Modulation Mode | HT20 | Test Freq. (MHz) | 5240 |
| N <sub>TX</sub> | 3    | Polarization     | V    |

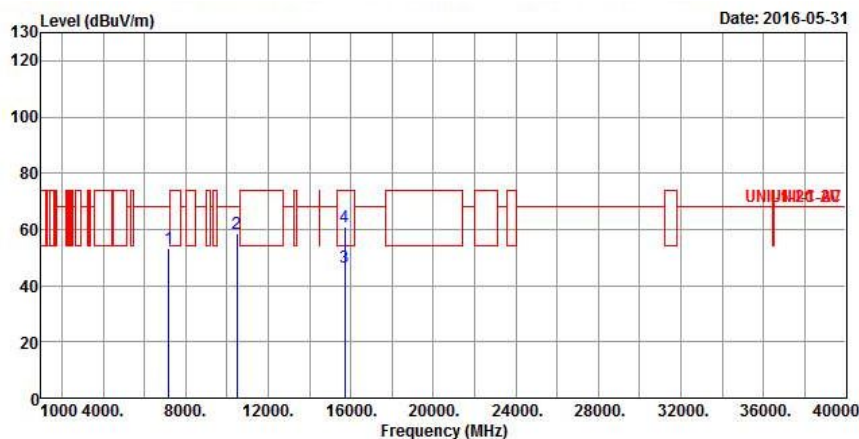

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Cable Preamp Loss | Factor | Remark        |
|---|-----------|--------|------------|------------|-------------------|-------------------|--------|---------------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m              | dB     | dB            |
| 1 | 7177.000  | 53.18  | -15.02     | 68.20      | 43.37             | 35.52             | 7.05   | 32.76 Peak    |
| 2 | 10480.000 | 58.65  | -9.55      | 68.20      | 43.50             | 39.38             | 8.55   | 32.78 Peak    |
| 3 | 15720.000 | 46.49  | -7.51      | 54.00      | 30.26             | 37.87             | 10.75  | 32.39 Average |
| 4 | 15720.000 | 60.79  | -13.21     | 74.00      | 44.56             | 37.87             | 10.75  | 32.39 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |      |                  |      |
|-----------------|------|------------------|------|
| Modulation Mode | HT20 | Test Freq. (MHz) | 5240 |
| N <sub>TX</sub> | 3    | Polarization     | H    |

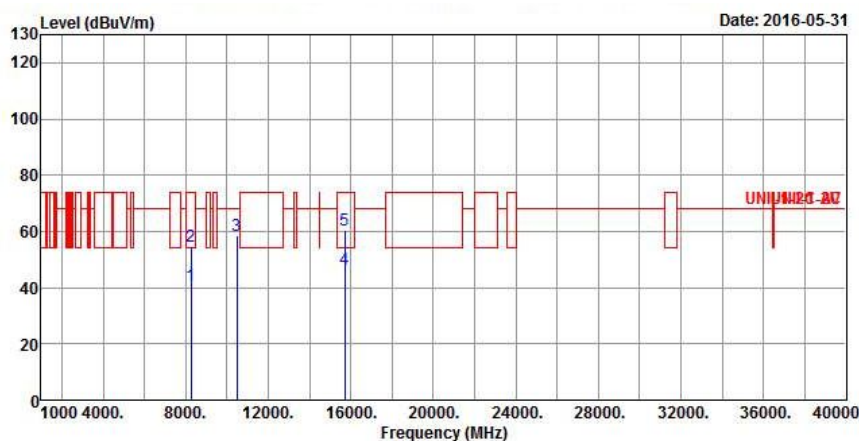

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Cable Loss | Preamplifier Factor | Remark        |
|---|-----------|--------|------------|------------|-------------------|------------|---------------------|---------------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m       | dB                  | dB            |
| 1 | 8259.000  | 40.82  | -13.18     | 54.00      | 29.23             | 36.89      | 7.64                | 32.94 Average |
| 2 | 8259.000  | 54.90  | -19.10     | 74.00      | 43.31             | 36.89      | 7.64                | 32.94 Peak    |
| 3 | 10480.000 | 58.34  | -9.86      | 68.20      | 43.19             | 39.38      | 8.55                | 32.78 Peak    |
| 4 | 15720.000 | 46.55  | -7.45      | 54.00      | 30.32             | 37.87      | 10.75               | 32.39 Average |
| 5 | 15720.000 | 60.51  | -13.49     | 74.00      | 44.28             | 37.87      | 10.75               | 32.39 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |      |                  |      |
|-----------------|------|------------------|------|
| Modulation Mode | HT40 | Test Freq. (MHz) | 5190 |
| N <sub>TX</sub> | 3    | Polarization     | V    |

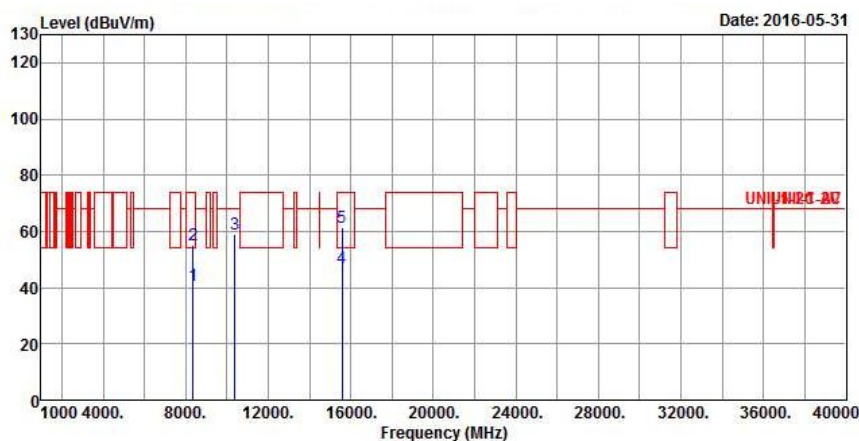

|   | Freq      | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp |               |
|---|-----------|--------|--------|--------|-------------|-------|--------|---------------|
|   | MHz       | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Remark        |
|   |           |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB            |
| 1 | 8375.000  | 40.58  | -13.42 | 54.00  | 28.99       | 36.80 | 7.73   | 32.94 Average |
| 2 | 8375.000  | 54.96  | -19.04 | 74.00  | 43.37       | 36.80 | 7.73   | 32.94 Peak    |
| 3 | 10380.000 | 59.20  | -9.00  | 68.20  | 44.33       | 39.26 | 8.48   | 32.87 Peak    |
| 4 | 15570.000 | 46.82  | -7.18  | 54.00  | 30.48       | 38.23 | 10.46  | 32.35 Average |
| 5 | 15570.000 | 61.40  | -12.60 | 74.00  | 45.06       | 38.23 | 10.46  | 32.35 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |      |                  |      |
|-----------------|------|------------------|------|
| Modulation Mode | HT40 | Test Freq. (MHz) | 5190 |
| N <sub>TX</sub> | 3    | Polarization     | H    |

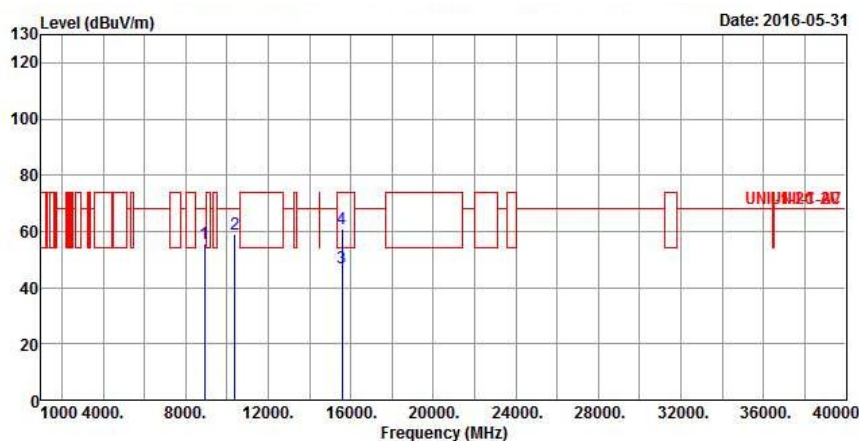

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Cable Loss | Preamp Factor | Remark        |
|---|-----------|--------|------------|------------|-------------------|------------|---------------|---------------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m       | dB            | dB            |
| 1 | 8930.000  | 55.84  | -12.36     | 68.20      | 43.71             | 37.22      | 7.99          | 33.08 Peak    |
| 2 | 10380.000 | 59.01  | -9.19      | 68.20      | 44.14             | 39.26      | 8.48          | 32.87 Peak    |
| 3 | 15570.000 | 46.81  | -7.19      | 54.00      | 30.47             | 38.23      | 10.46         | 32.35 Average |
| 4 | 15570.000 | 60.92  | -13.08     | 74.00      | 44.58             | 38.23      | 10.46         | 32.35 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |      |                  |      |
|-----------------|------|------------------|------|
| Modulation Mode | HT40 | Test Freq. (MHz) | 5230 |
| N <sub>TX</sub> | 3    | Polarization     | V    |

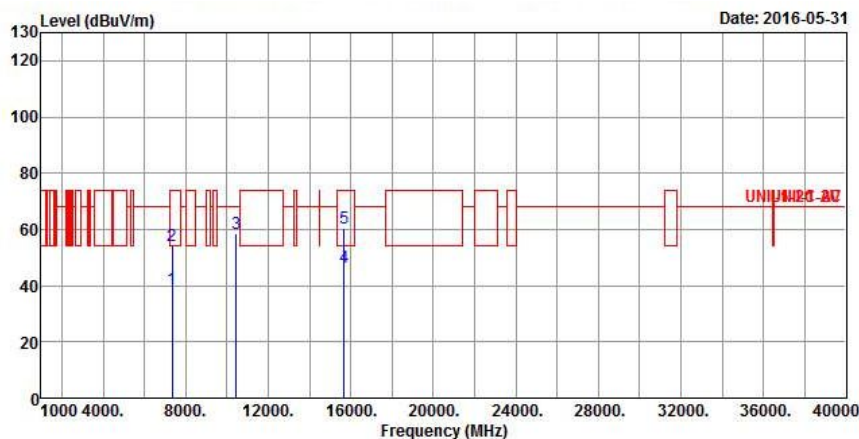

|   | Freq      | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp |               |
|---|-----------|--------|--------|--------|-------------|-------|--------|---------------|
|   | MHz       | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Remark        |
|   |           |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB            |
| 1 | 7341.000  | 38.91  | -15.09 | 54.00  | 28.78       | 35.92 | 7.02   | 32.81 Average |
| 2 | 7341.000  | 54.24  | -19.76 | 74.00  | 44.11       | 35.92 | 7.02   | 32.81 Peak    |
| 3 | 10460.000 | 58.53  | -9.67  | 68.20  | 43.45       | 39.35 | 8.53   | 32.80 Peak    |
| 4 | 15690.000 | 46.42  | -7.58  | 54.00  | 30.18       | 37.94 | 10.69  | 32.39 Average |
| 5 | 15690.000 | 60.26  | -13.74 | 74.00  | 44.02       | 37.94 | 10.69  | 32.39 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |      |                  |      |
|-----------------|------|------------------|------|
| Modulation Mode | HT40 | Test Freq. (MHz) | 5230 |
| N <sub>TX</sub> | 3    | Polarization     | H    |

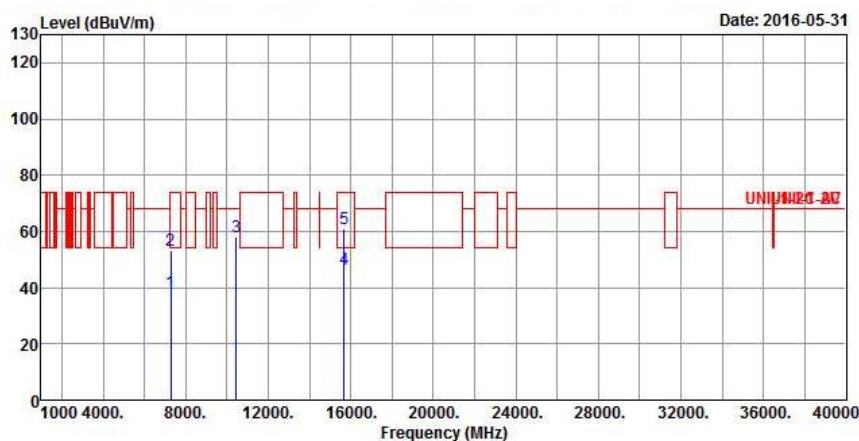

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Cable Loss | Preamp Factor | Remark        |
|---|-----------|--------|------------|------------|-------------------|------------|---------------|---------------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m       | dB            | dB            |
| 1 | 7273.000  | 38.27  | -15.73     | 54.00      | 28.27             | 35.76      | 7.03          | 32.79 Average |
| 2 | 7273.000  | 53.27  | -20.73     | 74.00      | 43.27             | 35.76      | 7.03          | 32.79 Peak    |
| 3 | 10460.000 | 58.21  | -9.99      | 68.20      | 43.13             | 39.35      | 8.53          | 32.80 Peak    |
| 4 | 15690.000 | 46.41  | -7.59      | 54.00      | 30.17             | 37.94      | 10.69         | 32.39 Average |
| 5 | 15690.000 | 60.76  | -13.24     | 74.00      | 44.52             | 37.94      | 10.69         | 32.39 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5725-5850MHz

| Transmitter Radiated Unwanted Emissions (Above 1GHz) |     |                  |      |
|------------------------------------------------------|-----|------------------|------|
| Modulation Mode                                      | 11a | Test Freq. (MHz) | 5745 |
| N <sub>TX</sub>                                      | 1   | Polarization     | V    |

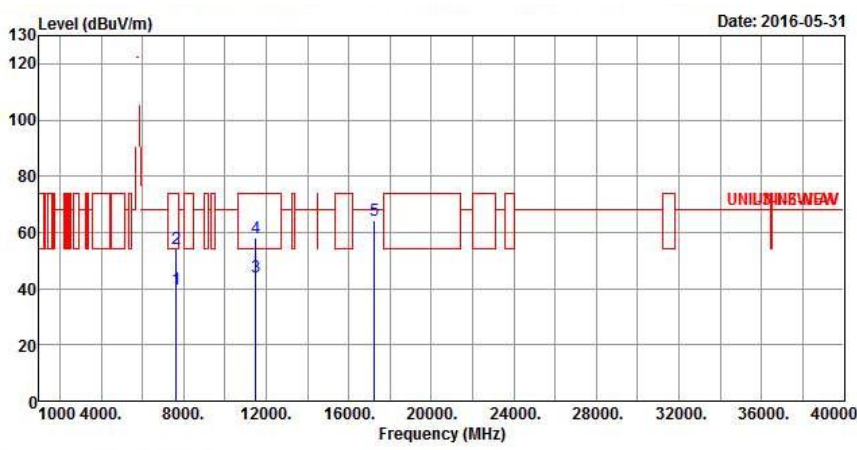

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Cable Preamp Loss | Factor | Remark        |
|---|-----------|--------|------------|------------|-------------------|-------------------|--------|---------------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m              | dB     | dB            |
| 1 | 7636.000  | 40.01  | -13.99     | 54.00      | 29.22             | 36.52             | 7.15   | 32.88 Average |
| 2 | 7636.000  | 54.21  | -19.79     | 74.00      | 43.42             | 36.52             | 7.15   | 32.88 Peak    |
| 3 | 11490.000 | 43.93  | -10.07     | 54.00      | 27.60             | 40.00             | 8.79   | 32.46 Average |
| 4 | 11490.000 | 58.14  | -15.86     | 74.00      | 41.81             | 40.00             | 8.79   | 32.46 Peak    |
| 5 | 17235.000 | 64.08  | -4.12      | 68.20      | 43.77             | 40.96             | 10.89  | 31.54 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |     |                  |      |
|-----------------|-----|------------------|------|
| Modulation Mode | 11a | Test Freq. (MHz) | 5745 |
| N <sub>TX</sub> | 1   | Polarization     | H    |

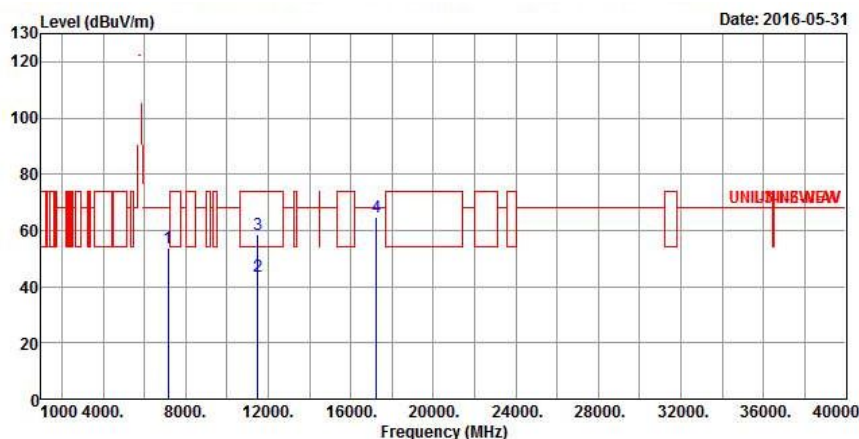

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7141.000  | 53.60  | -14.60     | 68.20      | 43.85             | 35.44          | 7.07       | 32.76         | Peak    |
| 2 | 11490.000 | 43.87  | -10.13     | 54.00      | 27.54             | 40.00          | 8.79       | 32.46         | Average |
| 3 | 11490.000 | 58.56  | -15.44     | 74.00      | 42.23             | 40.00          | 8.79       | 32.46         | Peak    |
| 4 | 17235.000 | 64.66  | -3.54      | 68.20      | 44.35             | 40.96          | 10.89      | 31.54         | Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |     |                  |      |
|-----------------|-----|------------------|------|
| Modulation Mode | 11a | Test Freq. (MHz) | 5785 |
| N <sub>TX</sub> | 1   | Polarization     | V    |

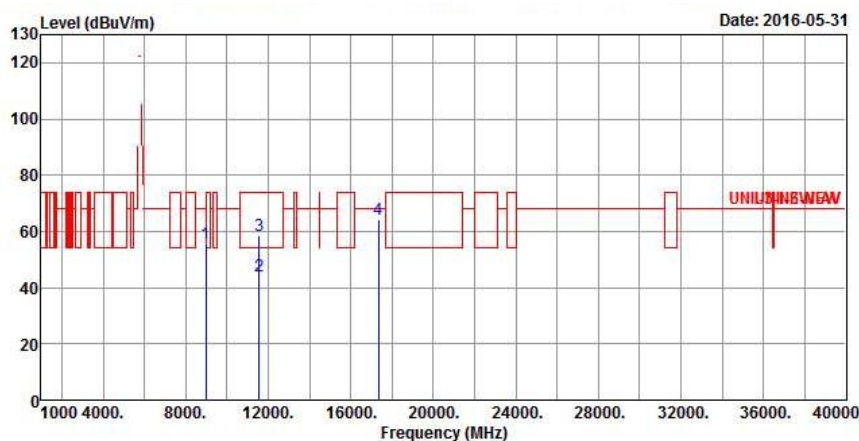

|   | Freq      | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp |               |
|---|-----------|--------|--------|--------|-------------|-------|--------|---------------|
|   | MHz       | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Remark        |
|   |           |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB            |
| 1 | 8998.000  | 55.78  | -12.42 | 68.20  | 43.55       | 37.30 | 8.04   | 33.11 Peak    |
| 2 | 11570.000 | 44.25  | -9.75  | 54.00  | 27.97       | 39.86 | 8.89   | 32.47 Average |
| 3 | 11570.000 | 58.31  | -15.69 | 74.00  | 42.03       | 39.86 | 8.89   | 32.47 Peak    |
| 4 | 17355.000 | 64.51  | -3.69  | 68.20  | 43.89       | 41.25 | 10.94  | 31.57 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |     |                  |      |
|-----------------|-----|------------------|------|
| Modulation Mode | 11a | Test Freq. (MHz) | 5785 |
| N <sub>TX</sub> | 1   | Polarization     | H    |

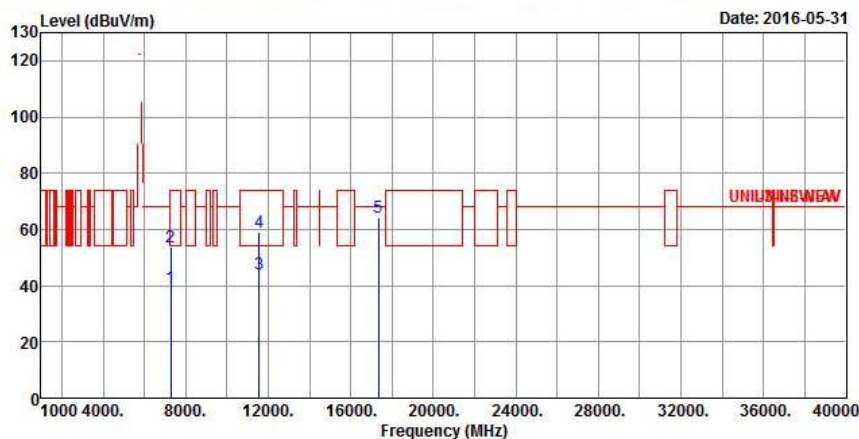

|   | Freq      | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp |               |
|---|-----------|--------|--------|--------|-------------|-------|--------|---------------|
|   | MHz       | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Remark        |
|   |           |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB            |
| 1 | 7281.000  | 39.32  | -14.68 | 54.00  | 29.31       | 35.77 | 7.03   | 32.79 Average |
| 2 | 7281.000  | 53.86  | -20.14 | 74.00  | 43.85       | 35.77 | 7.03   | 32.79 Peak    |
| 3 | 11570.000 | 44.18  | -9.82  | 54.00  | 27.90       | 39.86 | 8.89   | 32.47 Average |
| 4 | 11570.000 | 58.95  | -15.05 | 74.00  | 42.67       | 39.86 | 8.89   | 32.47 Peak    |
| 5 | 17355.000 | 64.35  | -3.85  | 68.20  | 43.73       | 41.25 | 10.94  | 31.57 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |     |                  |      |
|-----------------|-----|------------------|------|
| Modulation Mode | 11a | Test Freq. (MHz) | 5825 |
| N <sub>TX</sub> | 1   | Polarization     | V    |

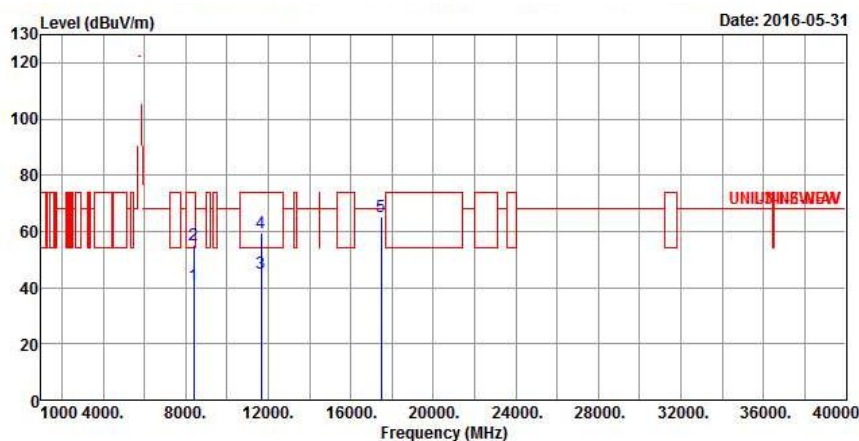

|   | Freq      | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp |               |
|---|-----------|--------|--------|--------|-------------|-------|--------|---------------|
|   | MHz       | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Remark        |
|   |           |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB            |
| 1 | 8399.000  | 40.63  | -13.37 | 54.00  | 29.04       | 36.78 | 7.75   | 32.94 Average |
| 2 | 8399.000  | 55.07  | -18.93 | 74.00  | 43.48       | 36.78 | 7.75   | 32.94 Peak    |
| 3 | 11650.000 | 44.93  | -9.07  | 54.00  | 28.70       | 39.70 | 9.01   | 32.48 Average |
| 4 | 11650.000 | 59.52  | -14.48 | 74.00  | 43.29       | 39.70 | 9.01   | 32.48 Peak    |
| 5 | 17475.000 | 65.25  | -2.95  | 68.20  | 44.33       | 41.54 | 10.99  | 31.61 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |     |                  |      |
|-----------------|-----|------------------|------|
| Modulation Mode | 11a | Test Freq. (MHz) | 5825 |
| N <sub>TX</sub> | 1   | Polarization     | H    |

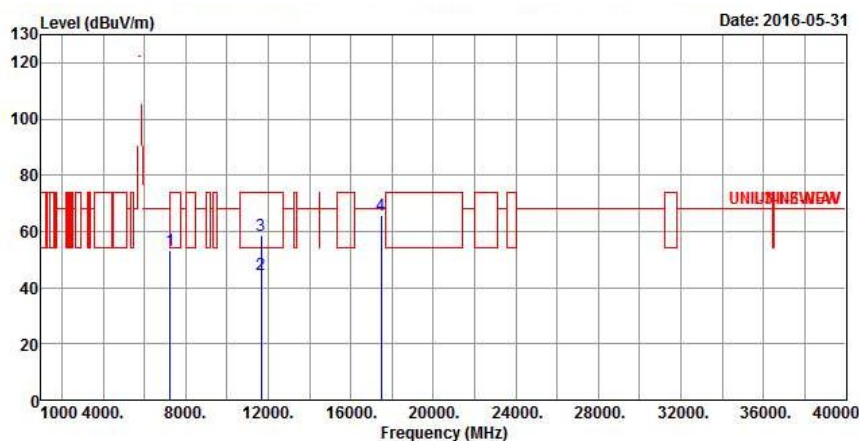

|   | Freq      | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp |               |
|---|-----------|--------|--------|--------|-------------|-------|--------|---------------|
|   | MHz       | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Remark        |
|   |           |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB            |
| 1 | 7248.000  | 53.07  | -15.13 | 68.20  | 43.12       | 35.70 | 7.03   | 32.78 Peak    |
| 2 | 11650.000 | 44.80  | -9.20  | 54.00  | 28.57       | 39.70 | 9.01   | 32.48 Average |
| 3 | 11650.000 | 58.51  | -15.49 | 74.00  | 42.28       | 39.70 | 9.01   | 32.48 Peak    |
| 4 | 17475.000 | 65.61  | -2.59  | 68.20  | 44.69       | 41.54 | 10.99  | 31.61 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |      |                  |      |
|-----------------|------|------------------|------|
| Modulation Mode | HT20 | Test Freq. (MHz) | 5745 |
| N <sub>TX</sub> | 3    | Polarization     | V    |

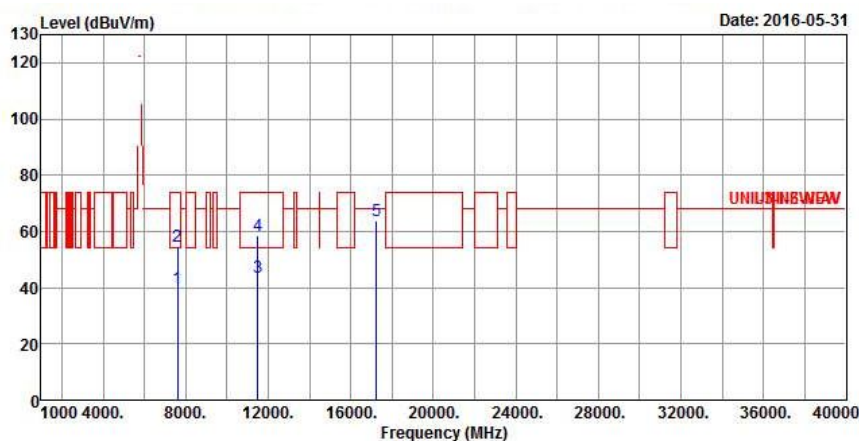

|   | Freq      | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp |               |
|---|-----------|--------|--------|--------|-------------|-------|--------|---------------|
|   | MHz       | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Remark        |
|   |           |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB            |
| 1 | 7608.000  | 39.85  | -14.15 | 54.00  | 29.11       | 36.47 | 7.15   | 32.88 Average |
| 2 | 7608.000  | 54.48  | -19.52 | 74.00  | 43.74       | 36.47 | 7.15   | 32.88 Peak    |
| 3 | 11490.000 | 43.64  | -10.36 | 54.00  | 27.31       | 40.00 | 8.79   | 32.46 Average |
| 4 | 11490.000 | 58.42  | -15.58 | 74.00  | 42.09       | 40.00 | 8.79   | 32.46 Peak    |
| 5 | 17235.000 | 63.79  | -4.41  | 68.20  | 43.48       | 40.96 | 10.89  | 31.54 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |      |                  |      |
|-----------------|------|------------------|------|
| Modulation Mode | HT20 | Test Freq. (MHz) | 5745 |
| N <sub>TX</sub> | 3    | Polarization     | H    |

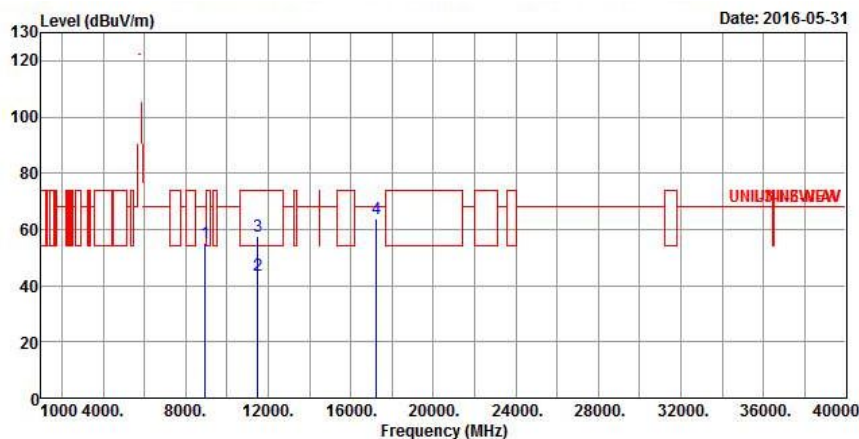

|   | Freq      | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp |               |
|---|-----------|--------|--------|--------|-------------|-------|--------|---------------|
|   | MHz       | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Remark        |
|   |           |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB            |
| 1 | 8966.000  | 55.18  | -13.02 | 68.20  | 42.99       | 37.26 | 8.02   | 33.09 Peak    |
| 2 | 11490.000 | 43.54  | -10.46 | 54.00  | 27.21       | 40.00 | 8.79   | 32.46 Average |
| 3 | 11490.000 | 57.39  | -16.61 | 74.00  | 41.06       | 40.00 | 8.79   | 32.46 Peak    |
| 4 | 17235.000 | 63.99  | -4.21  | 68.20  | 43.68       | 40.96 | 10.89  | 31.54 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |      |                  |      |
|-----------------|------|------------------|------|
| Modulation Mode | HT20 | Test Freq. (MHz) | 5785 |
| N <sub>TX</sub> | 3    | Polarization     | V    |

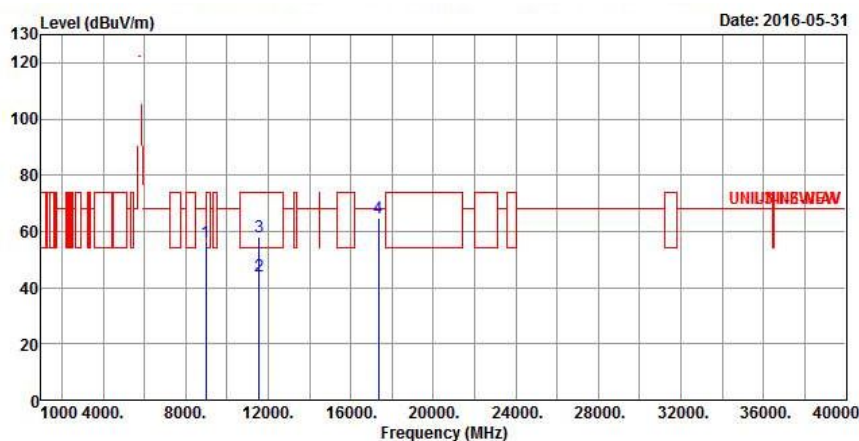

|   | Freq      | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp |               |
|---|-----------|--------|--------|--------|-------------|-------|--------|---------------|
|   | MHz       | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Remark        |
|   |           |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB            |
| 1 | 8994.000  | 55.98  | -12.22 | 68.20  | 43.75       | 37.29 | 8.04   | 33.10 Peak    |
| 2 | 11570.000 | 44.07  | -9.93  | 54.00  | 27.79       | 39.86 | 8.89   | 32.47 Average |
| 3 | 11570.000 | 58.21  | -15.79 | 74.00  | 41.93       | 39.86 | 8.89   | 32.47 Peak    |
| 4 | 17355.000 | 64.58  | -3.62  | 68.20  | 43.96       | 41.25 | 10.94  | 31.57 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |      |                  |      |
|-----------------|------|------------------|------|
| Modulation Mode | HT20 | Test Freq. (MHz) | 5785 |
| N <sub>TX</sub> | 3    | Polarization     | H    |

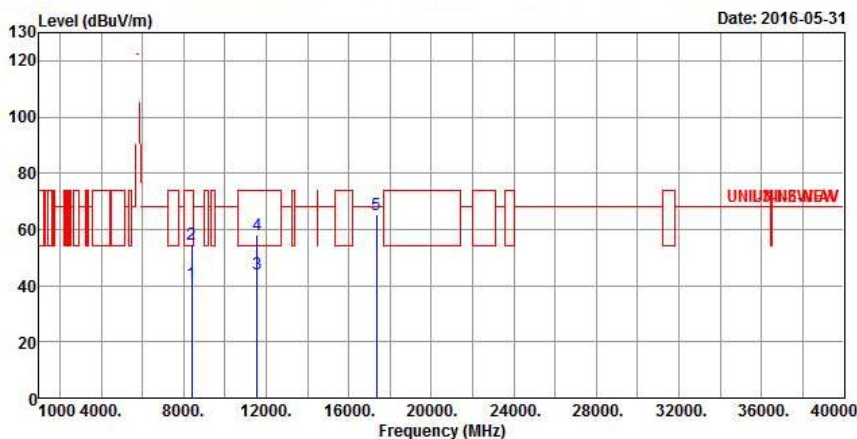

|   | Freq      | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp |               |
|---|-----------|--------|--------|--------|-------------|-------|--------|---------------|
|   | MHz       | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Remark        |
|   |           |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB            |
| 1 | 8379.000  | 40.65  | -13.35 | 54.00  | 29.06       | 36.80 | 7.73   | 32.94 Average |
| 2 | 8379.000  | 54.79  | -19.21 | 74.00  | 43.20       | 36.80 | 7.73   | 32.94 Peak    |
| 3 | 11570.000 | 44.03  | -9.97  | 54.00  | 27.75       | 39.86 | 8.89   | 32.47 Average |
| 4 | 11570.000 | 58.10  | -15.90 | 74.00  | 41.82       | 39.86 | 8.89   | 32.47 Peak    |
| 5 | 17355.000 | 65.07  | -3.13  | 68.20  | 44.45       | 41.25 | 10.94  | 31.57 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |      |                  |      |
|-----------------|------|------------------|------|
| Modulation Mode | HT20 | Test Freq. (MHz) | 5825 |
| N <sub>TX</sub> | 3    | Polarization     | V    |

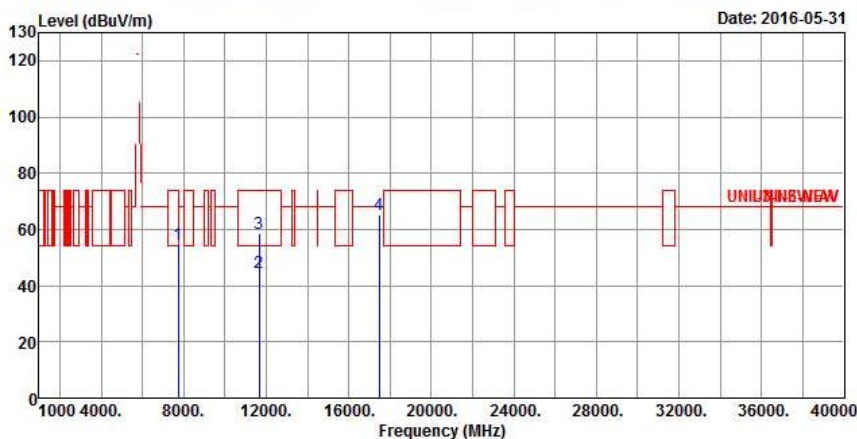

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB         | dB            |         |
| 1 | 7756.000  | 54.59  | -13.61     | 68.20      | 43.65             | 36.71      | 7.13          | Peak    |
| 2 | 11650.000 | 44.59  | -9.41      | 54.00      | 28.36             | 39.70      | 9.01          | Average |
| 3 | 11650.000 | 58.63  | -15.37     | 74.00      | 42.40             | 39.70      | 9.01          | Peak    |
| 4 | 17475.000 | 65.11  | -3.09      | 68.20      | 44.19             | 41.54      | 10.99         | Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |      |                  |      |
|-----------------|------|------------------|------|
| Modulation Mode | HT20 | Test Freq. (MHz) | 5825 |
| N <sub>TX</sub> | 3    | Polarization     | H    |

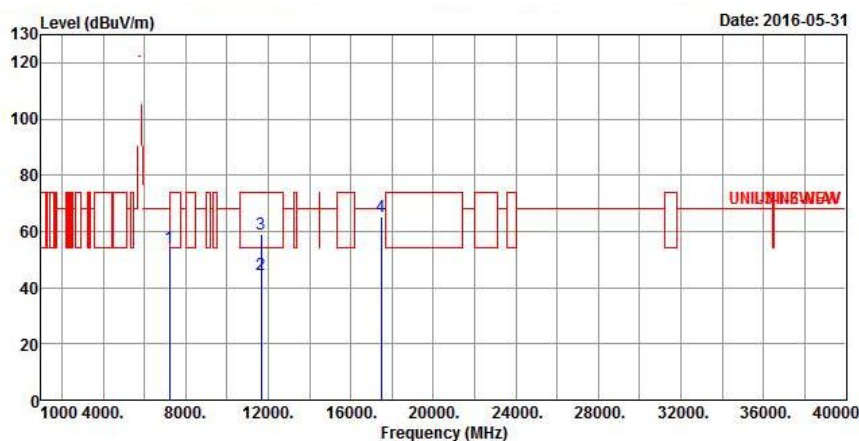

|   | Freq      | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp |               |
|---|-----------|--------|--------|--------|-------------|-------|--------|---------------|
|   | MHz       | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Remark        |
|   |           |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB            |
| 1 | 7229.000  | 54.14  | -14.06 | 68.20  | 44.23       | 35.65 | 7.04   | 32.78 Peak    |
| 2 | 11650.000 | 44.52  | -9.48  | 54.00  | 28.29       | 39.70 | 9.01   | 32.48 Average |
| 3 | 11650.000 | 59.12  | -14.88 | 74.00  | 42.89       | 39.70 | 9.01   | 32.48 Peak    |
| 4 | 17475.000 | 65.43  | -2.77  | 68.20  | 44.51       | 41.54 | 10.99  | 31.61 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |      |                  |      |
|-----------------|------|------------------|------|
| Modulation Mode | HT40 | Test Freq. (MHz) | 5755 |
| N <sub>TX</sub> | 3    | Polarization     | V    |

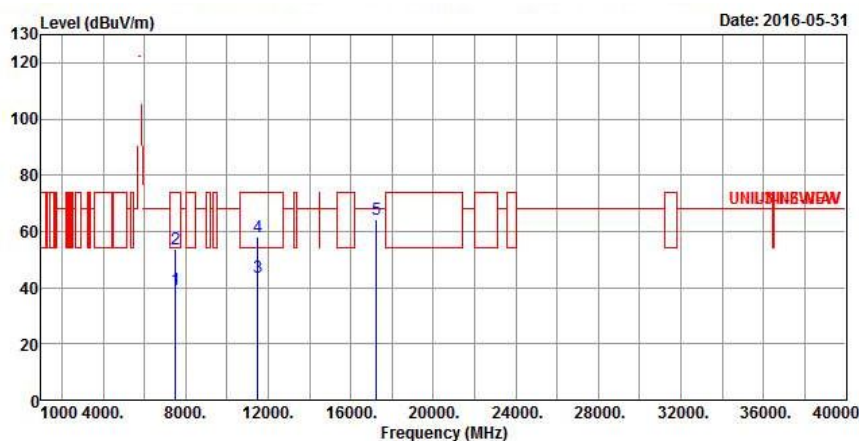

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Cable Preamp Loss | Factor | Remark        |
|---|-----------|--------|------------|------------|-------------------|-------------------|--------|---------------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m              | dB     | dB            |
| 1 | 7513.000  | 39.14  | -14.86     | 54.00      | 28.59             | 36.32             | 7.09   | 32.86 Average |
| 2 | 7513.000  | 53.70  | -20.30     | 74.00      | 43.15             | 36.32             | 7.09   | 32.86 Peak    |
| 3 | 11510.000 | 43.66  | -10.34     | 54.00      | 27.34             | 39.98             | 8.80   | 32.46 Average |
| 4 | 11510.000 | 58.16  | -15.84     | 74.00      | 41.84             | 39.98             | 8.80   | 32.46 Peak    |
| 5 | 17265.000 | 64.38  | -3.82      | 68.20      | 43.99             | 41.04             | 10.90  | 31.55 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |      |                  |      |
|-----------------|------|------------------|------|
| Modulation Mode | HT40 | Test Freq. (MHz) | 5755 |
| N <sub>TX</sub> | 3    | Polarization     | H    |

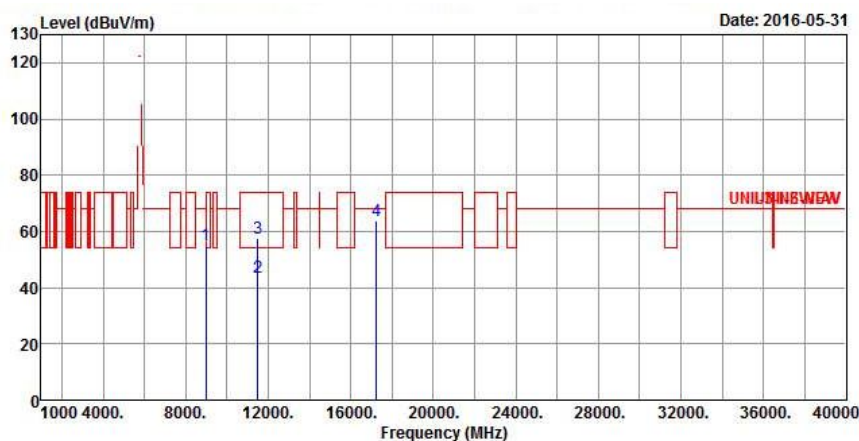

|   | Freq      | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp |               |
|---|-----------|--------|--------|--------|-------------|-------|--------|---------------|
|   | MHz       | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Remark        |
|   |           |        | dB     | dBuV/m | dBuV        | dB    | dB     |               |
| 1 | 8990.000  | 55.37  | -12.83 | 68.20  | 43.15       | 37.29 | 8.03   | 33.10 Peak    |
| 2 | 11510.000 | 43.58  | -10.42 | 54.00  | 27.26       | 39.98 | 8.80   | 32.46 Average |
| 3 | 11510.000 | 57.78  | -16.22 | 74.00  | 41.46       | 39.98 | 8.80   | 32.46 Peak    |
| 4 | 17265.000 | 63.95  | -4.25  | 68.20  | 43.56       | 41.04 | 10.90  | 31.55 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |      |                  |      |
|-----------------|------|------------------|------|
| Modulation Mode | HT40 | Test Freq. (MHz) | 5795 |
| N <sub>TX</sub> | 3    | Polarization     | V    |

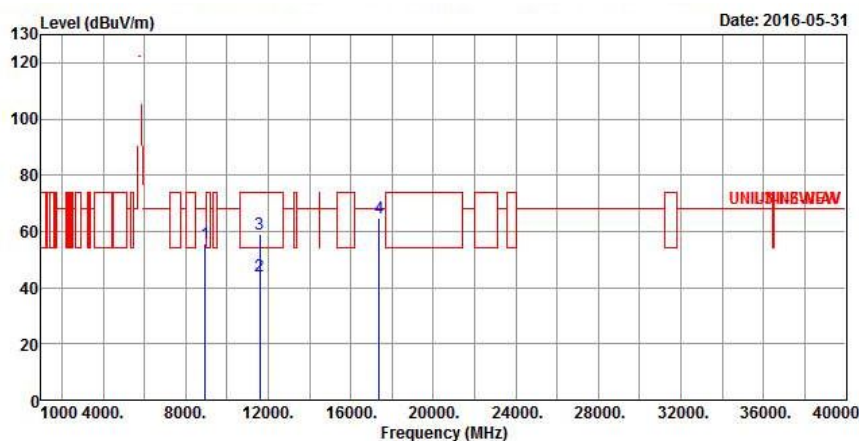

|   | Freq      | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp |               |
|---|-----------|--------|--------|--------|-------------|-------|--------|---------------|
|   | MHz       | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Remark        |
|   |           |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB            |
| 1 | 8942.000  | 55.60  | -12.60 | 68.20  | 43.45       | 37.23 | 8.00   | 33.08 Peak    |
| 2 | 11590.000 | 44.19  | -9.81  | 54.00  | 27.92       | 39.82 | 8.92   | 32.47 Average |
| 3 | 11590.000 | 59.11  | -14.89 | 74.00  | 42.84       | 39.82 | 8.92   | 32.47 Peak    |
| 4 | 17385.000 | 64.70  | -3.50  | 68.20  | 44.02       | 41.32 | 10.95  | 31.59 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### Transmitter Radiated Unwanted Emissions (Above 1GHz)

|                 |      |                  |      |
|-----------------|------|------------------|------|
| Modulation Mode | HT40 | Test Freq. (MHz) | 5795 |
| N <sub>TX</sub> | 3    | Polarization     | H    |

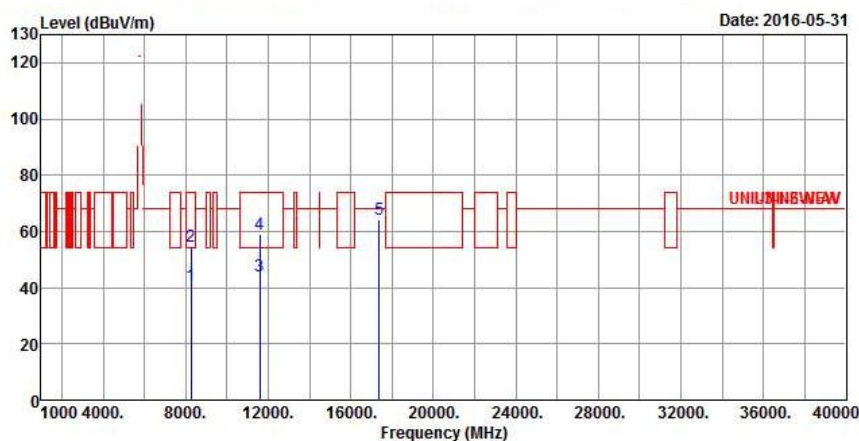

|   | Freq      | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp |               |
|---|-----------|--------|--------|--------|-------------|-------|--------|---------------|
|   | MHz       | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Remark        |
|   |           |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB            |
| 1 | 8267.000  | 40.74  | -13.26 | 54.00  | 29.15       | 36.89 | 7.64   | 32.94 Average |
| 2 | 8267.000  | 54.84  | -19.16 | 74.00  | 43.25       | 36.89 | 7.64   | 32.94 Peak    |
| 3 | 11590.000 | 44.15  | -9.85  | 54.00  | 27.88       | 39.82 | 8.92   | 32.47 Average |
| 4 | 11590.000 | 58.94  | -15.06 | 74.00  | 42.67       | 39.82 | 8.92   | 32.47 Peak    |
| 5 | 17385.000 | 64.48  | -3.72  | 68.20  | 43.80       | 41.32 | 10.95  | 31.59 Peak    |

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Summary

| Mode                          | Result | Ch<br>(Hz) | Center<br>(Hz) | Fl<br>(Hz) | Fh<br>(Hz) | ppm   | Limit<br>(ppm) | Port | Remark |
|-------------------------------|--------|------------|----------------|------------|------------|-------|----------------|------|--------|
| 5.2G;11a;20;1;1;5200;M;T30,VN | Pass   | 5.2G       | 5.19996427G    | NaN        | NaN        | 6.871 | 20             | 1    | 0 min  |





Result

| Mode                           | Result | Ch<br>(Hz) | Center<br>(Hz) | Fl<br>(Hz) | Fh<br>(Hz) | ppm   | Limit<br>(ppm) | Port | Remark |
|--------------------------------|--------|------------|----------------|------------|------------|-------|----------------|------|--------|
| 5.2G;11a;20;1;1;5200;M;TN,VN   | Pass   | 5.2G       | 5.19996724G    | NaN        | NaN        | 6.3   | 20             | 1    | 0 min  |
| 5.2G;11a;20;1;1;5200;M;TN,VN   | Pass   | 5.2G       | 5.19996723G    | NaN        | NaN        | 6.302 | 20             | 1    | 2 min  |
| 5.2G;11a;20;1;1;5200;M;TN,VN   | Pass   | 5.2G       | 5.19996727G    | NaN        | NaN        | 6.295 | 20             | 1    | 5 min  |
| 5.2G;11a;20;1;1;5200;M;TN,VN   | Pass   | 5.2G       | 5.19996717G    | NaN        | NaN        | 6.313 | 20             | 1    | 10 min |
| 5.2G;11a;20;1;1;5200;M;TN,VL   | Pass   | 5.2G       | 5.1999672G     | NaN        | NaN        | 6.307 | 20             | 1    | 0 min  |
| 5.2G;11a;20;1;1;5200;M;TN,VL   | Pass   | 5.2G       | 5.19996712G    | NaN        | NaN        | 6.323 | 20             | 1    | 2 min  |
| 5.2G;11a;20;1;1;5200;M;TN,VL   | Pass   | 5.2G       | 5.19996716G    | NaN        | NaN        | 6.316 | 20             | 1    | 5 min  |
| 5.2G;11a;20;1;1;5200;M;TN,VL   | Pass   | 5.2G       | 5.1999671G     | NaN        | NaN        | 6.328 | 20             | 1    | 10 min |
| 5.2G;11a;20;1;1;5200;M;TN,VH   | Pass   | 5.2G       | 5.19996723G    | NaN        | NaN        | 6.302 | 20             | 1    | 0 min  |
| 5.2G;11a;20;1;1;5200;M;TN,VH   | Pass   | 5.2G       | 5.19996722G    | NaN        | NaN        | 6.303 | 20             | 1    | 2 min  |
| 5.2G;11a;20;1;1;5200;M;TN,VH   | Pass   | 5.2G       | 5.19996718G    | NaN        | NaN        | 6.311 | 20             | 1    | 5 min  |
| 5.2G;11a;20;1;1;5200;M;TN,VH   | Pass   | 5.2G       | 5.19996723G    | NaN        | NaN        | 6.302 | 20             | 1    | 10 min |
| 5.2G;11a;20;1;1;5200;M;T50,VN  | Pass   | 5.2G       | 5.19998936G    | NaN        | NaN        | 2.046 | 20             | 1    | 0 min  |
| 5.2G;11a;20;1;1;5200;M;T50,VN  | Pass   | 5.2G       | 5.19998931G    | NaN        | NaN        | 2.055 | 20             | 1    | 2 min  |
| 5.2G;11a;20;1;1;5200;M;T50,VN  | Pass   | 5.2G       | 5.1999894G     | NaN        | NaN        | 2.038 | 20             | 1    | 5 min  |
| 5.2G;11a;20;1;1;5200;M;T50,VN  | Pass   | 5.2G       | 5.19998944G    | NaN        | NaN        | 2.03  | 20             | 1    | 10 min |
| 5.2G;11a;20;1;1;5200;M;T40,VN  | Pass   | 5.2G       | 5.19996695G    | NaN        | NaN        | 6.355 | 20             | 1    | 0 min  |
| 5.2G;11a;20;1;1;5200;M;T40,VN  | Pass   | 5.2G       | 5.19996751G    | NaN        | NaN        | 6.249 | 20             | 1    | 2 min  |
| 5.2G;11a;20;1;1;5200;M;T40,VN  | Pass   | 5.2G       | 5.19996793G    | NaN        | NaN        | 6.167 | 20             | 1    | 5 min  |
| 5.2G;11a;20;1;1;5200;M;T40,VN  | Pass   | 5.2G       | 5.19996847G    | NaN        | NaN        | 6.064 | 20             | 1    | 10 min |
| 5.2G;11a;20;1;1;5200;M;T30,VN  | Pass   | 5.2G       | 5.19996427G    | NaN        | NaN        | 6.871 | 20             | 1    | 0 min  |
| 5.2G;11a;20;1;1;5200;M;T30,VN  | Pass   | 5.2G       | 5.19996435G    | NaN        | NaN        | 6.856 | 20             | 1    | 2 min  |
| 5.2G;11a;20;1;1;5200;M;T30,VN  | Pass   | 5.2G       | 5.19996436G    | NaN        | NaN        | 6.854 | 20             | 1    | 5 min  |
| 5.2G;11a;20;1;1;5200;M;T30,VN  | Pass   | 5.2G       | 5.19996435G    | NaN        | NaN        | 6.857 | 20             | 1    | 10 min |
| 5.2G;11a;20;1;1;5200;M;T20,VN  | Pass   | 5.2G       | 5.19996729G    | NaN        | NaN        | 6.29  | 20             | 1    | 0 min  |
| 5.2G;11a;20;1;1;5200;M;T20,VN  | Pass   | 5.2G       | 5.19996744G    | NaN        | NaN        | 6.261 | 20             | 1    | 2 min  |
| 5.2G;11a;20;1;1;5200;M;T20,VN  | Pass   | 5.2G       | 5.19996748G    | NaN        | NaN        | 6.254 | 20             | 1    | 5 min  |
| 5.2G;11a;20;1;1;5200;M;T20,VN  | Pass   | 5.2G       | 5.19996751G    | NaN        | NaN        | 6.248 | 20             | 1    | 10 min |
| 5.2G;11a;20;1;1;5200;M;T10,VN  | Pass   | 5.2G       | 5.19997514G    | NaN        | NaN        | 4.78  | 20             | 1    | 0 min  |
| 5.2G;11a;20;1;1;5200;M;T10,VN  | Pass   | 5.2G       | 5.19997505G    | NaN        | NaN        | 4.799 | 20             | 1    | 2 min  |
| 5.2G;11a;20;1;1;5200;M;T10,VN  | Pass   | 5.2G       | 5.19997502G    | NaN        | NaN        | 4.805 | 20             | 1    | 5 min  |
| 5.2G;11a;20;1;1;5200;M;T10,VN  | Pass   | 5.2G       | 5.19997499G    | NaN        | NaN        | 4.809 | 20             | 1    | 10 min |
| 5.2G;11a;20;1;1;5200;M;T0,VN   | Pass   | 5.2G       | 5.19998766G    | NaN        | NaN        | 2.373 | 20             | 1    | 0 min  |
| 5.2G;11a;20;1;1;5200;M;T0,VN   | Pass   | 5.2G       | 5.19998629G    | NaN        | NaN        | 2.636 | 20             | 1    | 2 min  |
| 5.2G;11a;20;1;1;5200;M;T0,VN   | Pass   | 5.2G       | 5.19998628G    | NaN        | NaN        | 2.638 | 20             | 1    | 5 min  |
| 5.2G;11a;20;1;1;5200;M;T0,VN   | Pass   | 5.2G       | 5.19998606G    | NaN        | NaN        | 2.681 | 20             | 1    | 10 min |
| 5.2G;11a;20;1;1;5200;M;T-10,VN | Pass   | 5.2G       | 5.19999627G    | NaN        | NaN        | 0.718 | 20             | 1    | 0 min  |
| 5.2G;11a;20;1;1;5200;M;T-10,VN | Pass   | 5.2G       | 5.19999677G    | NaN        | NaN        | 0.62  | 20             | 1    | 2 min  |
| 5.2G;11a;20;1;1;5200;M;T-10,VN | Pass   | 5.2G       | 5.19999701G    | NaN        | NaN        | 0.575 | 20             | 1    | 5 min  |
| 5.2G;11a;20;1;1;5200;M;T-10,VN | Pass   | 5.2G       | 5.19999698G    | NaN        | NaN        | 0.581 | 20             | 1    | 10 min |
| 5.2G;11a;20;1;1;5200;M;T-20,VN | Pass   | 5.2G       | 5.20000276G    | NaN        | NaN        | 0.53  | 20             | 1    | 0 min  |
| 5.2G;11a;20;1;1;5200;M;T-20,VN | Pass   | 5.2G       | 5.20000296G    | NaN        | NaN        | 0.569 | 20             | 1    | 2 min  |
| 5.2G;11a;20;1;1;5200;M;T-20,VN | Pass   | 5.2G       | 5.20000298G    | NaN        | NaN        | 0.573 | 20             | 1    | 5 min  |
| 5.2G;11a;20;1;1;5200;M;T-20,VN | Pass   | 5.2G       | 5.2000031G     | NaN        | NaN        | 0.596 | 20             | 1    | 10 min |
| 5.2G;11a;20;1;1;5200;M;T-30,VN | Pass   | 5.2G       | 5.20000377G    | NaN        | NaN        | 0.725 | 20             | 1    | 0 min  |
| 5.2G;11a;20;1;1;5200;M;T-30,VN | Pass   | 5.2G       | 5.20000376G    | NaN        | NaN        | 0.724 | 20             | 1    | 2 min  |
| 5.2G;11a;20;1;1;5200;M;T-30,VN | Pass   | 5.2G       | 5.20000374G    | NaN        | NaN        | 0.719 | 20             | 1    | 5 min  |
| 5.2G;11a;20;1;1;5200;M;T-30,VN | Pass   | 5.2G       | 5.20000374G    | NaN        | NaN        | 0.719 | 20             | 1    | 10 min |