

**TEST REPORT
Class II Permissive Change**

**Report Number: 30646311
Project Number: 3064631
January 29, 2005**

Testing performed on the

**VitalSense Transmitter
Modes: XHR
FCC ID: JIAXTP1
to**

**FCC Part 15, Subpart C (15.229)
for
Mini Mitter Co., Inc.**



A2LA Certificate Number: 1755-01

Test Performed by:
Intertek Testing Services
1365 Adams Court
Menlo Park, CA 94025

Test Authorized by:
Mini Mitter Co., Inc.
20300 Empire Ave., Bidg B-3
Bend, OR 97701


Prepared by:



David Chernomordik

Date: 01/29/2005

Reviewed by:



Ollie Moyrong

Date: 01/29/2005

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.

TABLE OF CONTENTS

1.0	Introduction	3
2.0	Summary of Tests	4
3.0	General Description	5
3.1	Product Description	5
3.2	Related Submittal(s) Grants	6
3.3	Test Methodology	6
3.4	Test Facility	6
4.0	System Test Configuration	7
4.1	Support Equipment and description.....	7
4.2	Block Diagram of Test Setup.....	7
4.3	Justification.....	7
4.4	Software Exercise Program.....	7
4.5	Mode of operation during test.....	8
4.6	Modifications required for Compliance.....	8
4.7	Additions, deviations and exclusions from standards.....	8
5.0	Radiated emission measurements	9
5.1	Requirements	9
5.2	Procedure	9
5.3	Field Strength Calculation	10
5.4	Test Result	11
5.5	Configuration photographs	14
6.0	Document History	17



1.0 Introduction

Mini Mitter has added a new Heart-Rate/Respiration Rate Sensor (XHR) to its VitalSense Integrated Physiological Monitoring System.

The two Temperature Sensors: Capsule and Arm Patch are presently authorized under FCC ID: JIAXTP1. The new XHR Sensor uses the same carrier frequency, data rate, modulation rate and index, and pseudo-random time-domain multiplexing scheme used in the temperature sensors. The topology and components of the transmitter portion of the XHR are identical to the Capsule temperature sensor. The antenna of the XHR sensor is identical to the Arm Patch sensor.

Due to the similarities of the new XHR sensor to the presently authorized sensors, the XHR sensor may be authorized under Permissive Change.

The only required tests to be performed are:

- Field Strength on the fundamental.
- Spurious radiated emissions outside of the band.



2.0 Summary of Tests

FCC ID: JIAXTP1

TEST	REFERENCE	RESULTS
Field Strength on the fundamental	15.229(a)	Complies
Spurious radiated emissions outside of the band	15.229(c)	Complies

Date of test: January 4, 2005

3.0 General Description**3.1 Product Description****Overview of the EUT**

Applicant name & address	Mini Mitter Co., Inc. 20300 Empire Ave., Bidg B-3 Bend, OR 97701
Manufacturer	Mini Mitter Co., Inc.
FCC Identifier	JIAAXTP1
Type of Modulation	FSK
Rated RF Output	Not rated
Frequency Range	40.66 – 40.70 MHz
Number of Channel(s)	One
Antenna	Integral part of the EUT

A pre-production version of the EUT was received on November 23, 2004 in good operating condition. As declared by the Applicant, it is identical to the production units.

3.2 Related Submittal(s) Grants

None.

3.3 Test Methodology

The radiated emissions measurements were performed according to the procedures in ANSI C63.4 (1992). Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **"Data Sheet"** of this Application. All other measurements were made in accordance with the procedures in parts 2 and 15 of CFR 47.

3.4 Test Facility


The test site used to collect the radiated data is site 1 (10-m semi-anechoic chamber). The site measurement data have been fully placed on file with the FCC and A2LA accredited.

4.0 System Test Configuration

4.1 Support Equipment and description

None. EUT operates as stand-alone equipment.

4.2 Block Diagram of Test Setup

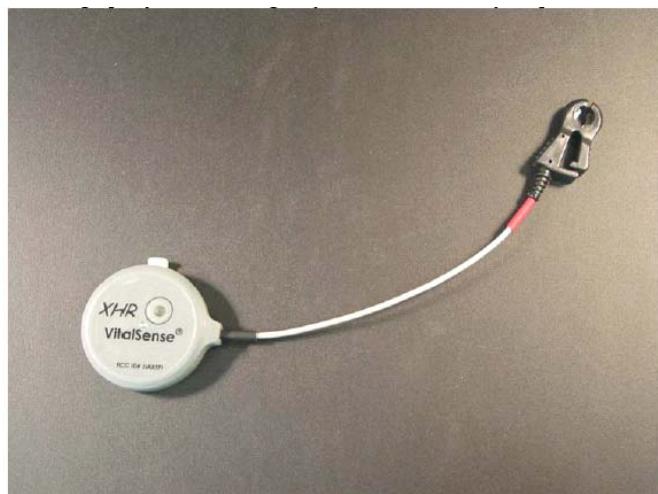

4.3 Justification

For emission testing, the Equipment Under Test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT is a stand-alone equipment; therefore, no peripherals were attached for the test.

For radiated emission measurements, the EUT was affixed to a non-conductive support and placed on the non-conductive turntable. The EUT is a stand-alone equipment, so there were no external I/O cables to maximize during testing. The position of the transmitter was varied about the 3-orthogonal axis. The worse case data is reported (transmitter lying along the y-axis) and the worse case axis is pictured in the test set-up photographs. The EUT is wired to transmit full power.

4.4 Software Exercise Program

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.



4.5 Mode of operation during test

For emissions testing, the unit was setup to transmit continuously to simplify the measurement methodology.

4.6 Modifications required for Compliance

Intertek installed no modifications during compliance testing in order to bring the product into compliance.

4.7 Additions, deviations and exclusions from standards

No additions, deviations or exclusion have been made from standard.

5.0 Radiated emission measurements

FCC Rules: 15.229(a), 15.229(c)

5.1 Requirements

The Field Strength of any emissions within the band shall not exceed 60 dB(μ V/m) at 3 m. The Field Strength of any emissions appearing outside the band shall not exceed the following general radiated emission limits in 15.209.

Radiated Emissions Limits, Section 15.209(a)

Frequency, MHz	Field Strength at 3m dB(μ V/m)
30-88	40.0
88-216	43.5
216-960	46.0
Above 960	54.0

5.2 Procedure

Radiated emission measurements were performed from 30 MHz to 1000 MHz. Spectrum Analyzer Resolution Bandwidth is 100 kHz or greater.

The EUT is placed on the wooden turntable. The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. All readings are extrapolated back to the equivalent three-meter reading using inverse scaling with distance.

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included. All measurements were performed with peak detection unless otherwise specified.

5.3 Field Strength Calculation

$$FS = RA + AF + CF - AG$$

Where FS = Field Strength in dB(μ V/m)

RA = Receiver Amplitude (including preamplifier) in dB(μ V)

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB(1/m)

AG = Amplifier Gain in dB

Assume a receiver reading of 52.0 dB(μ V) is obtained. The antenna factor of 7.4 dB(1/m) and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB(μ V/m). This value in dB(μ V/m) was converted to its corresponding level in μ V/m.

$$RA = 52.0 \text{ dB}(\mu\text{V}) \quad AF = 7.4 \text{ dB}(1/\text{m})$$

$$CF = 1.6 \text{ dB} \quad AG = 29.0 \text{ dB}$$

$$FS = 52 + 7.4 + 1.6 - 29 = 32 \text{ dB}(\mu\text{V}/\text{m})$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(32 \text{ dB}(\mu\text{V}/\text{m})/20)] = 39.8 \mu\text{V}/\text{m}$$

5.4 Test Result

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.


The following levels of the Field Strength on the fundamental frequency were measured:

Frequency, MHz	Polarization	Field Strength at 3 m, dB(μ V/m)	Field Strength Limit, dB(μ V/m)	Margin, dB
40.68	H	44.4	60.0	-15.6
40.68	V	39.4	60.0	-20.4

The level of the Field Strength of the spurious radiated emissions (worst-case) is below the limit by 3.8 dB

The level of the Field Strength on the band-edge frequencies is more than 30 dB below the limit, as can be seen from the graph below, extracted from the original Application for certification.



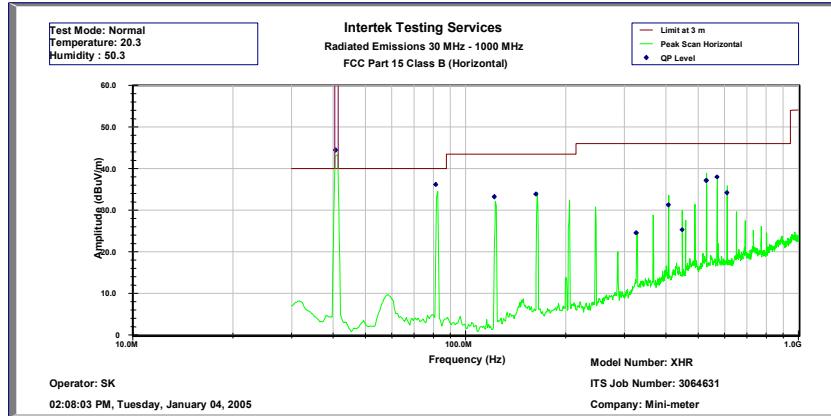

**Intertek Testing Services
Radiated Emissions 30 MHz - 1000 MHz
FCC Part 15 Class B (QP-Horizontal)**

Operator: SK

Model Number: XHR
ITS Job Number: 3064631
Company: Mini-meter


02:08:01 PM, Tuesday, January 04, 2005

Frequency	Quasi Pk FS	Limit@3m	Margin	RA	CF	AG	AF
Hz	dB(uV/m)	dB(uV/m)	dB	dB(uV)	dB	dB	dB(1/m)
40.68	44.4	60.0	-15.6	64.1	3.8	32.4	8.9
81.35	36.2	40.0	-3.8	56.7	4.1	32.3	7.7
122.0	33.2	43.5	-10.3	55.0	4.3	32.3	6.2
162.7	33.9	43.5	-9.6	52.7	4.6	32.3	8.8
325.4	24.6	46.0	-21.4	35.4	5.4	32.2	16.0
406.8	31.3	46.0	-14.7	41.2	5.9	32.3	16.5
447.5	25.3	46.0	-20.7	34.8	6.2	32.3	16.6
528.9	37.1	46.0	-8.9	43.2	6.7	32.4	19.6
569.6	38.0	46.0	-8.0	44.5	6.8	32.5	19.2
610.3	34.2	46.0	-11.8	40.3	6.8	32.5	19.6

Test Mode: Normal

Temperature: 20.3

Humidity : 50.3

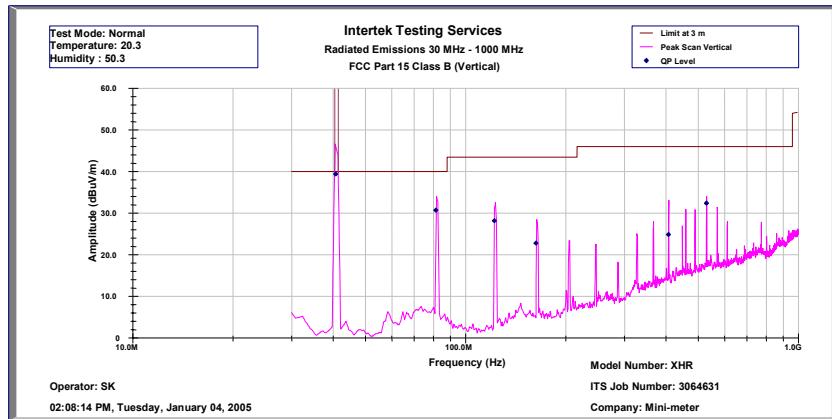

Intertek Testing Services
Radiated Emissions 30 MHz - 1000 MHz
FCC Part 15 Class B (QP-Vertical)

Operator: SK

02:08:14 PM, Tuesday, January 04, 2005

Model Number: XHR
ITS Job Number: 3064631
Company: Mini-meter


Frequency Hz	Quasi Pk FS dB(uV/m)	Limit@3m dB(uV/m)	Margin dB	RA dB(uV)	Cable dB	AG dB	AF dB(1/m)
40.68	39.4	60.0	-20.6	61.6	3.8	32.4	6.3
81.35	30.7	40.0	-9.3	51.9	4.1	32.3	7.0
122.0	28.2	43.5	-15.3	49.6	4.3	32.3	6.5
162.7	22.8	43.5	-20.7	42.0	4.6	32.3	8.5
406.8	24.9	46.0	-21.1	34.8	5.9	32.3	16.5
528.6	33.4	46.0	-12.6	39.2	6.7	32.4	19.9

Test Mode: Normal
Temperature: 20.3
Humidity : 50.3

5.5 Configuration photographs



Configuration photographs (Continued)

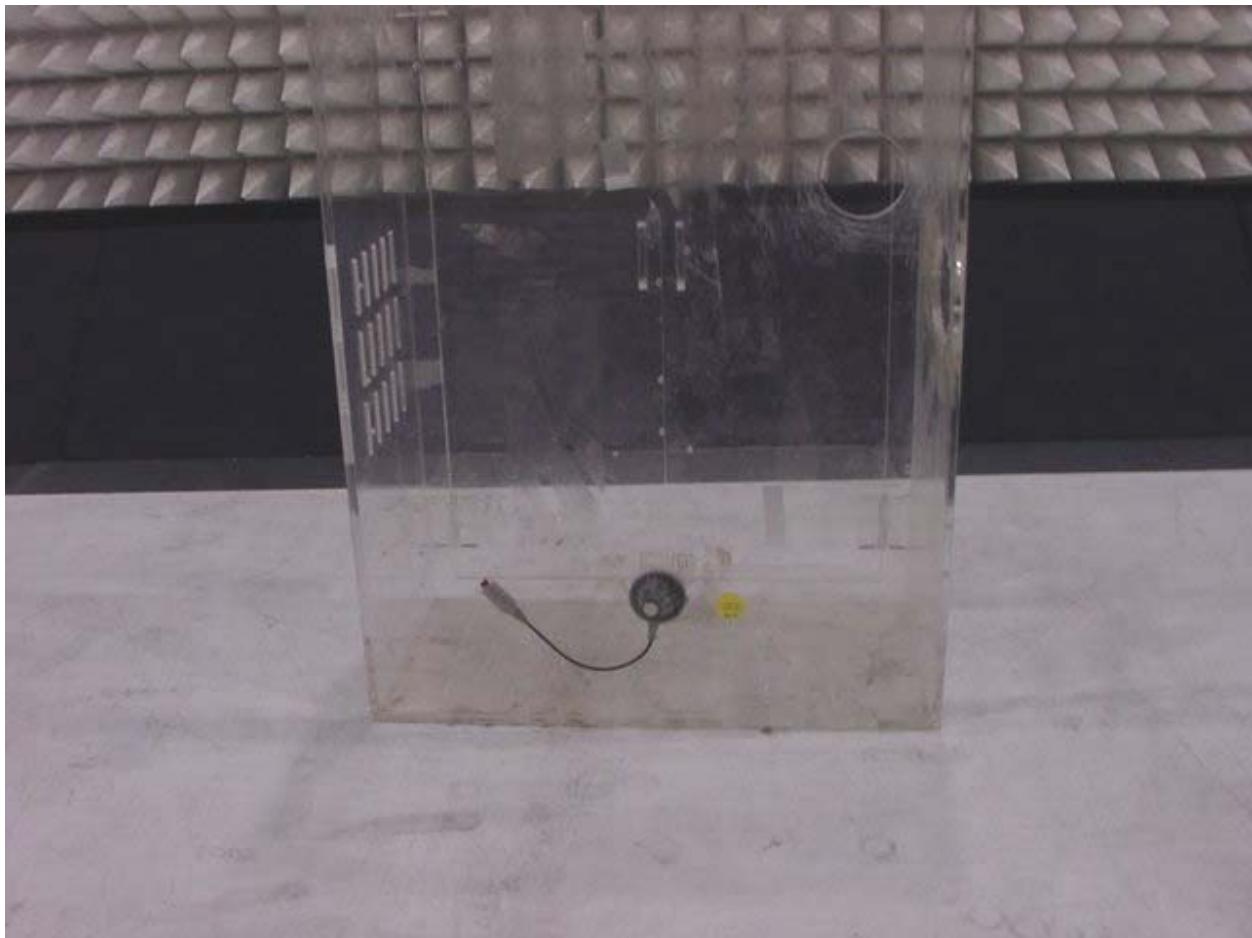



6.0 List of Test Equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list:

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. INTERVAL	CAL. DUE
RF Filter Section	Hewlett Packard	85460A	3448A00267	12	9/10/05
EMI Receiver	Hewlett Packard	8546A	3710A00373	12	9/10/05
BI-Log Antenna	EMCO	3143	9509-1164	12	4/06/05
Pre-Amplifier	Sonoma Inst.	310	185634	12	3/25/05



6.0 Document History

Revision/ Job Number	Writer Initials	Date	Change
1.0 / 3064631	DC	January 29, 2005	Original document