

FCC REPORT

Applicant: H.K. Youngs Watch Co., Ltd.

Address of Applicant: Units 1-12, 10/F, Hope Sea Industrial Centre, No.26, Lam Hing St., Kowloon Bay, Kowloon, Hong Kong

Equipment Under Test (EUT)

Product Name: GPS WATCH

Model No.: YP11545, YC11006, YC11005

Trade Mark: Youngs

FCC ID: JJ8-11006

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249:2010

Date of sample receipt: May 10, 2012

Date of Test: May 14-28, 2012

Date of report issued: May 28, 2012

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS International Electrical Approvals or testing done by GTS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by GTS International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

2 Version

Version No.	Date	Description
00	May 28, 2012	Original

Prepared By:

Oscar. Li

Project Engineer

Date:

May 28, 2012

Check By:

Hans. Hu

Reviewer

Date:

May 28, 2012

3 Contents

	Page
1 COVER PAGE	1
2 VERSION.....	2
3 CONTENTS.....	3
4 TEST SUMMARY.....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST MODE	6
5.4 DESCRIPTION OF SUPPORT UNITS.....	6
5.5 TEST FACILITY	6
5.6 TEST LOCATION.....	6
5.7 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
5.8 TEST INSTRUMENTS LIST.....	7
6 TEST RESULTS AND MEASUREMENT DATA.....	8
6.1 ANTENNA REQUIREMENT:	8
6.2 RADIATED EMISSION METHOD	9
6.2.1 <i>Field Strength of The Fundamental Signal</i>	11
6.2.2 <i>Spurious emissions</i>	11
6.2.3 <i>Bandedge emissions</i>	13
6.3 20dB OCCUPY BANDWIDTH.....	14
7 TEST SETUP PHOTO.....	15
8 EUT CONSTRUCTIONAL DETAILS	16

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	N/A
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	N/A
20dB Occupied Bandwidth	15.215 (c)	Pass

Pass: The EUT complies with the essential requirements in the standard.

N/A: not applicable.

5 General Information

5.1 Client Information

Applicant:	H.K. Youngs Watch Co., Ltd.
Address of Applicant:	Units 1-12, 10/F, Hope Sea Industrial Centre, No.26, Lam Hing St., Kowloon Bay, Kowloon, Hong Kong
Manufacturer:	Dalas Timepiece (ShenZhen) Co., Ltd.
Address of Manufacturer:	No.11, YunFeng Rd., QueShan Industrial District, Dalang St., ShenZhen , China
Factory:	Dalas Timepiece (ShenZhen) Co., Ltd.
Address of factory :	No.11, YunFeng Rd., QueShan Industrial District, Dalang St., ShenZhen , China

5.2 General Description of E.U.T.

Product Name:	GPS WATCH
Model No.:	YP11545, YC11006, YC11005
Operation Frequency:	2457MHz
Channel numbers:	1
Modulation technology:	GFSK
Antenna Type:	Integral
Antenna gain:	-1dBi
Power supply:	DC 3V(Type: CR2032)
Remark:	Only the model YP11545 was tested. YC11006, YC11005 and YP11545 are identical in the same PCB layout, interior structure and electrical circuits. The only differences are the model name and appearance color for commercial purpose.

5.3 Test mode

Transmitting mode	Keep transmitting mode.
-------------------	-------------------------

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	68.46	71.20	70.14

Final Test Mode:

According to ANSI C63.4 standards, the test results are both the “worst case” and “worst setup”:
Y axis (see the test setup photo)

5.4 Description of Support Units

None.

5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission.

The acceptance letter from the FCC is maintained in our files. Registration 600491, July 20, 2010.

- **Industry Canada (IC)**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been

Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

5.6 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China Tel: 0755-27798480 Fax: 0755-27798960

5.7 Other Information Requested by the Customer


None.

5.8 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 30 2011	Mar. 29 2013
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 04 2011	Jul. 03 2012
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Feb. 25 2012	Feb. 24 2013
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 30 2011	June 29 2012
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 30 2011	Mar. 29 2013
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	Mar. 31 2012	Mar. 30 2013
9	Coaxial Cable	GTS	N/A	GTS211	Mar. 31 2012	Mar. 30 2013
10	Coaxial cable	GTS	N/A	GTS210	Mar. 31 2012	Mar. 30 2013
11	Coaxial Cable	GTS	N/A	GTS212	Mar. 31 2012	Mar. 30 2013
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 04 2011	Jul. 03 2012
13	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jul. 04 2011	Jul. 03 2012
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 30 2011	June 29 2012
15	Band filter	Amindeon	82346	GTS219	Mar. 31 2012	Mar. 30 2013


6 Test results and Measurement Data

6.1 Antenna requirement:

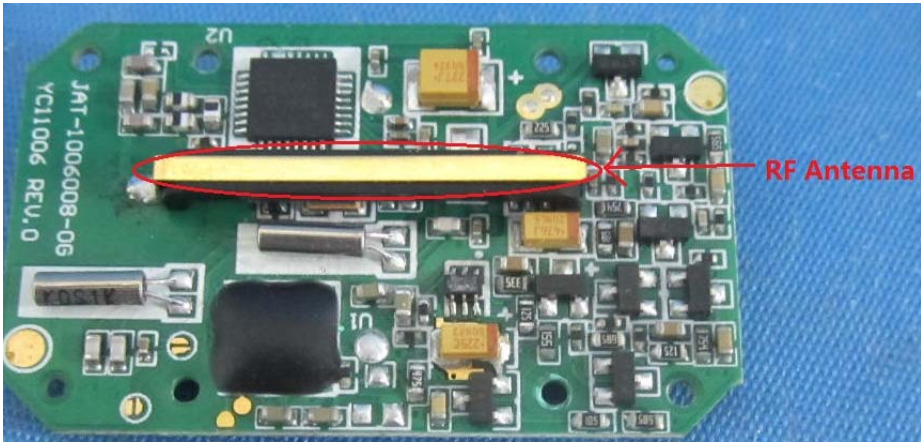Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna: The antenna is Integral antenna, the best case gain of the antenna is -1dBi	
	

6.2 Radiated Emission Method

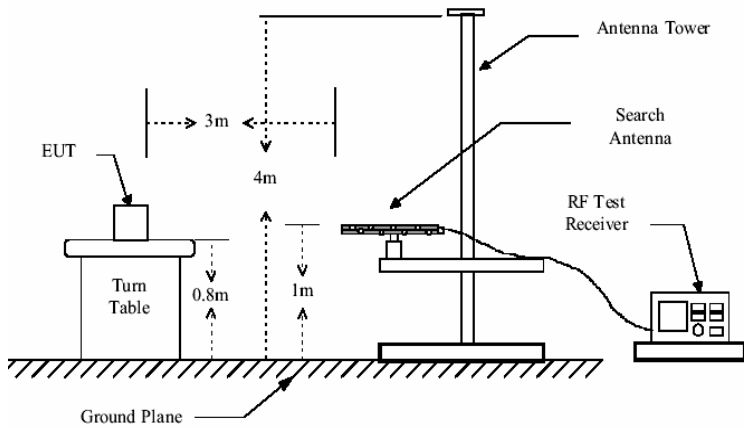Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.4:2003				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit: (Field strength of the fundamental signal)	Frequency		Limit (dBuV/m @3m)		Remark
	2400MHz-2483.5MHz		94.00		Average Value
			114.00		Peak Value
Limit: (Spurious Emissions)	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.00		Quasi-peak Value
	88MHz-216MHz		43.50		Quasi-peak Value
	216MHz-960MHz		46.00		Quasi-peak Value
	960MHz-1GHz		54.00		Quasi-peak Value
	Above 1GHz		54.00		Average Value
			74.00		Peak Value
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	Below 1GHz				
					
	Above 1GHz				

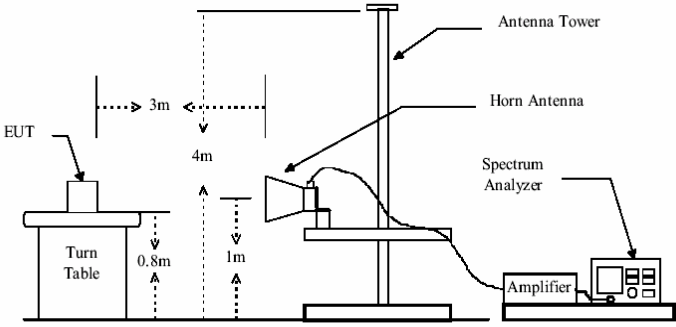	 The diagram illustrates the test setup. An EUT (Equipment Under Test) is placed on a turn table at a height of 0.8m. The turn table is rotated 360 degrees. The EUT is positioned 3m away from the antenna tower. The antenna tower has a horn antenna at a height of 4m. The antenna height is varied from 1m to 4m. The test receiver system consists of a spectrum analyzer and an amplifier.
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Transmitting mode
Test results:	Pass

Measurement data:

6.2.1 Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2457.00	66.94	27.47	2.87	29.99	67.29	114.00	-46.71	Horizontal
2457.00	70.85	27.47	2.87	29.99	71.20	114.00	-42.80	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2457.00	62.17	27.47	2.87	29.99	62.52	94.00	-31.48	Horizontal
2457.00	65.28	27.47	2.87	29.99	65.63	94.00	-28.37	Vertical

6.2.2 Spurious emissions

■ Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
33.45	41.69	14.85	0.14	32.23	24.45	40.00	-15.55	Vertical
58.20	39.49	15.35	0.18	31.97	23.05	40.00	-16.95	Vertical
104.90	38.14	12.64	0.26	31.72	19.32	43.50	-24.18	Vertical
143.83	40.35	12.86	0.31	31.95	21.57	43.50	-21.93	Vertical
431.03	39.42	15.46	0.85	32.09	23.64	46.00	-22.36	Vertical
912.86	37.91	24.42	1.74	31.47	32.60	46.00	-13.40	Vertical
33.92	41.22	11.64	0.14	32.23	20.77	40.00	-19.23	Horizontal
51.12	38.18	14.82	0.18	32.01	21.17	40.00	-18.83	Horizontal
100.58	39.03	11.89	0.26	31.69	19.49	43.50	-24.01	Horizontal
272.28	39.28	11.93	0.56	32.29	19.48	46.00	-26.52	Horizontal
627.27	38.75	20.07	1.23	31.40	28.65	46.00	-17.35	Horizontal
881.41	39.76	24.50	1.70	31.47	34.49	46.00	-11.51	Horizontal

■ Above 1GHz

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4914.00	39.08	31.89	4.50	24.08	51.39	74.00	-22.61	Vertical
7371.00	38.51	36.49	6.16	26.90	54.26	74.00	-19.74	Vertical
9828.00	36.58	38.52	7.76	25.32	57.54	74.00	-16.46	Vertical
12285.00	*					74.00		Vertical
14742.00	*					74.00		Vertical
4914.00	37.85	31.89	4.50	24.08	50.16	74.00	-23.84	Horizontal
7371.00	36.63	36.49	6.16	26.90	52.38	74.00	-21.62	Horizontal
9828.00	34.54	38.52	7.76	25.32	55.50	74.00	-18.50	Horizontal
12285.00	*					74.00		Horizontal
14742.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4914.00	27.65	31.89	4.50	24.08	39.96	54.00	-14.04	Vertical
7371.00	26.97	36.49	6.16	26.90	42.72	54.00	-11.28	Vertical
9828.00	23.86	38.52	7.76	25.32	44.82	54.00	-9.18	Vertical
12285.00	*					54.00		Vertical
14742.00	*					54.00		Vertical
4914.00	25.97	31.89	4.50	24.08	38.28	54.00	-15.72	Horizontal
7371.00	26.27	36.49	6.16	26.90	42.02	54.00	-11.98	Horizontal
9828.00	21.36	38.52	7.76	25.32	42.32	54.00	-11.68	Horizontal
12285.00	*					54.00		Horizontal
14742.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

6.2.3 Bandedge emissions

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	56.79	27.46	2.77	30.37	56.65	74.00	-17.35	Horizontal
2390.00	65.70	27.43	2.82	30.18	65.77	74.00	-8.23	Horizontal
2483.50	64.60	27.36	2.89	30.18	64.67	74.00	-9.33	Horizontal
2500.00	59.99	27.41	2.84	29.93	60.31	74.00	-13.69	Horizontal
2310.00	58.39	27.81	2.77	30.37	58.60	74.00	-15.40	Vertical
2390.00	66.43	27.33	2.82	30.18	66.40	74.00	-7.60	Vertical
2483.50	65.43	27.40	2.89	30.18	65.54	74.00	-8.46	Vertical
2500.00	61.05	27.39	2.84	29.93	61.35	74.00	-12.65	Vertical


Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	37.97	27.84	2.77	30.37	38.21	54.00	-15.79	Horizontal
2390.00	43.55	27.46	2.82	30.18	43.65	54.00	-10.35	Horizontal
2483.50	40.48	27.44	2.89	30.18	40.63	54.00	-13.37	Horizontal
2500.00	37.35	27.47	2.84	29.93	37.73	54.00	-16.27	Horizontal
2310.00	40.41	27.82	2.77	30.37	40.63	54.00	-13.37	Vertical
2390.00	44.61	27.51	2.82	30.18	44.76	54.00	-9.24	Vertical
2483.50	41.90	27.43	2.89	30.18	42.04	54.00	-11.96	Vertical
2500.00	39.42	27.49	2.84	29.93	39.82	54.00	-14.18	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor


6.3 20dB Occupy Bandwidth

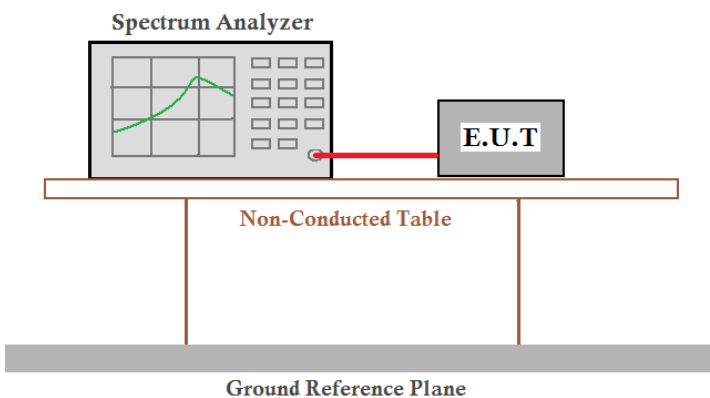Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.4:2003
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Transmitting mode
Test results:	Pass

Measurement Data



Operation Frequency	20dB bandwidth(MHz)	Result
2457MHz	0.99048	Pass

Test plot as follows:

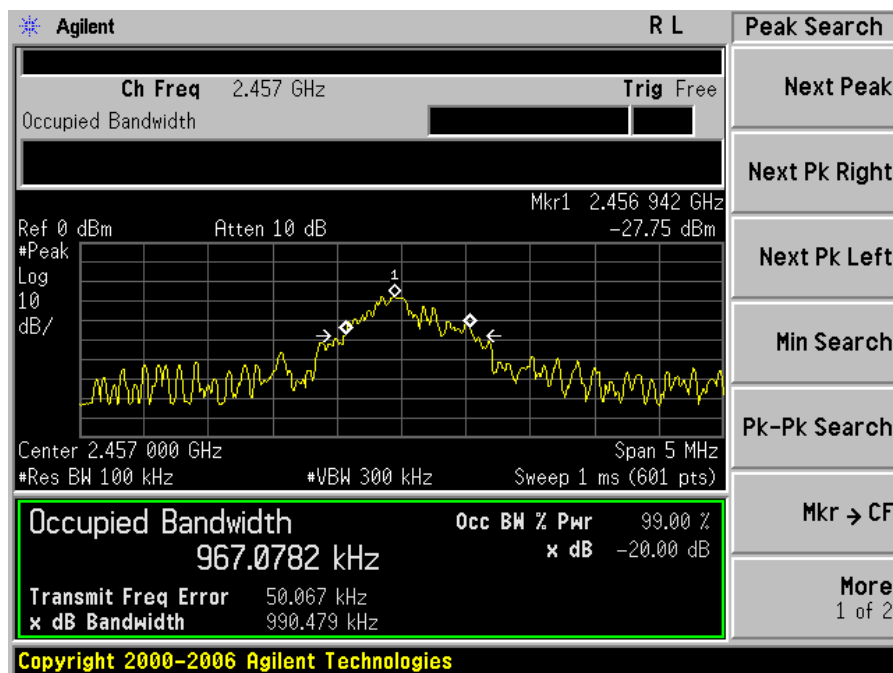

7 Test Setup Photo

Radiated Emission

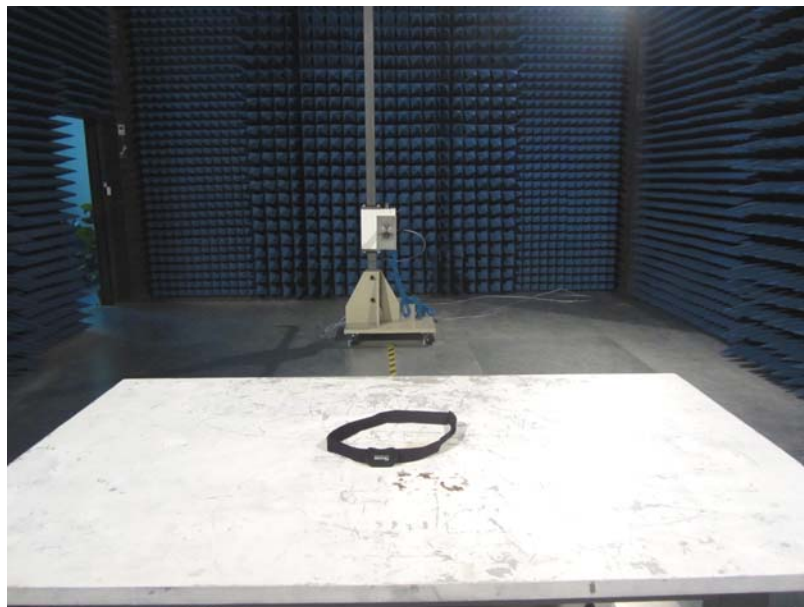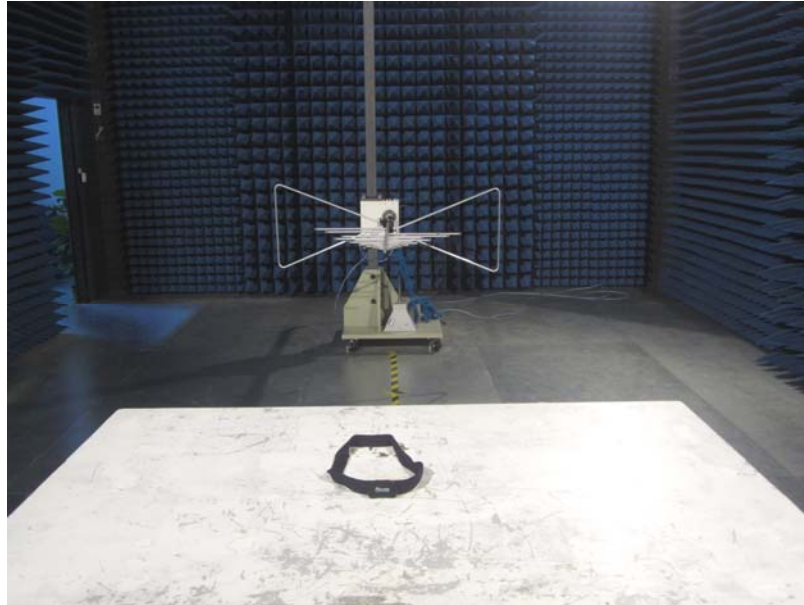



8 EUT Constructional Details









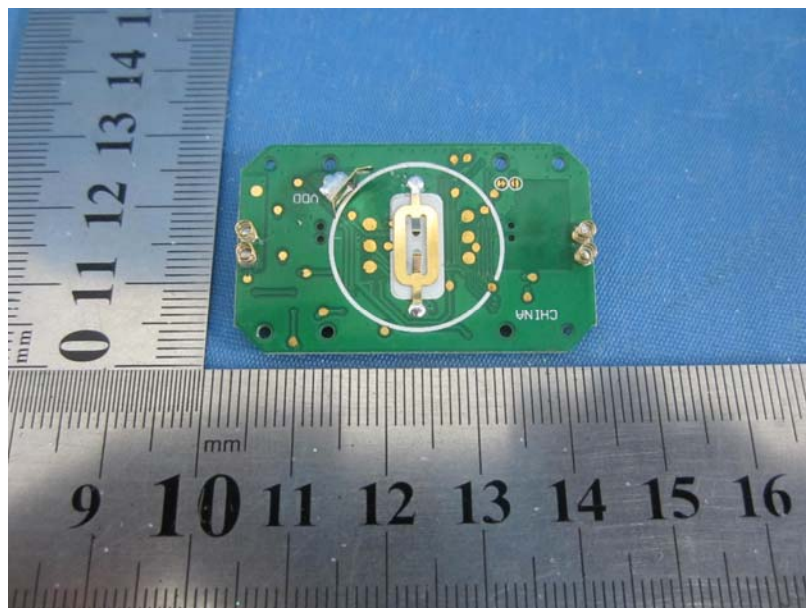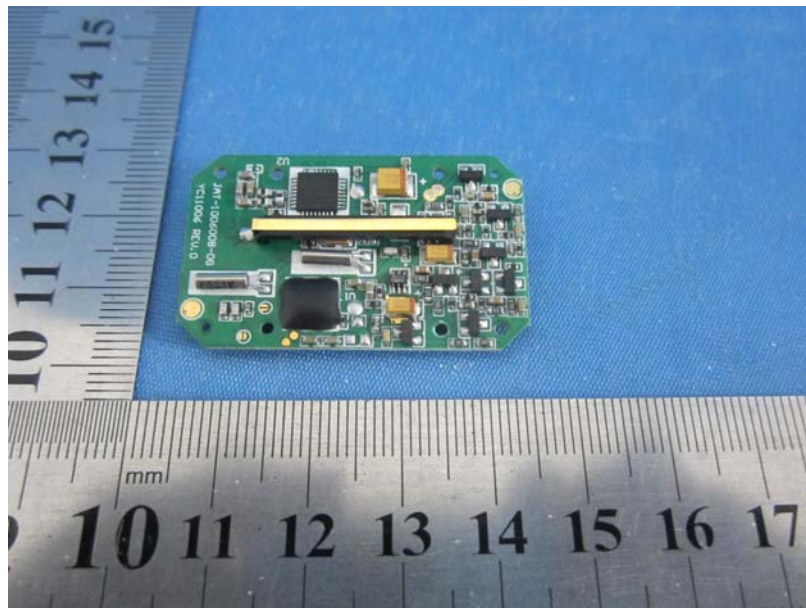

-----End-----