
FCC Test Report

Report No.: AGC14G120401-5F2C

FCC ID : JJMFUSION

PRODUCT DESIGNATION : GSM/WCDMA mobile phone/Smart phone (Fusion)

BRAND NAME : NUQLEO

MODEL NAME : QS-G3UCT1BK, QS-G3UCT1BL, QS-G3UCT1RD,
QS-G3UCT1WH, QS-G3UCT1SL, QS-G3UCT1YL,
QS-G3UCT1PR, QS-G3UCT1GN, QS-G3UCT1PK,
QS-G3UCT1OR

CLIENT : Accvent LLC

DATE OF ISSUE : May 14, 2012

STANDARD(S) : FCC Part 15 Rules

REPORT VERSION : V1.0

Attestation of Global Compliance Co., Ltd.

CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

VERIFICATION OF COMPLIANCE

Applicant:	Accvent LLC 454 Holiday Drive Hallandale,Florida,33009.USA
Manufacturer:	Accvent LLC 454 Holiday Drive Hallandale,Florida,33009.USA
Product Designation:	GSM/WCDMA mobile phone/Smart phone (Fusion)
Brand name:	NUQLEO
Test Model:	QS-G3UCT1BK
Series Model:	QS-G3UCT1BL, QS-G3UCT1RD, QS-G3UCT1WH, QS-G3UCT1SL, QS-G3UCT1YL, QS-G3UCT1PR, QS-G3UCT1GN, QS-G3UCT1PK, QS-G3UCT1OR
Model Difference:	All above models are the except for appearance.
FCC ID:	JJMFUSION
Report Number:	AGC14G120401-5F2C
Date of Test:	May 04 to May 12, 2012

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules and RSS-210 requirement.

Tested By: Leo Lee
Leo Lee May 14, 2012

Reviewed By: Forrest Lei
Forrest Lei May 14, 2012

Approved By: Solger Zhang
Solger Zhang May 14, 2012

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION	4
1.2 TABLE OF CARRIER FREQUENCIES	4
1.3 IEEE 802.11N MODULATION SCHEME	5
1.4 RELATED SUBMITTAL(S) / GRANT (S).....	5
1.5 TEST METHODOLOGY	5
1.6 TEST FACILITY	5
1.7 SPECIAL ACCESSORIES	5
1.8 EQUIPMENT MODIFICATIONS.....	5
2. SYSTEM TEST CONFIGURATION	6
2.1 CONFIGURATION OF EUT SYSTEM.....	6
2.2 EQUIPMENT USED IN EUT SYSTEM.....	6
3. SUMMARY OF TEST RESULTS.....	7
4. DESCRIPTION OF TEST MODES	7
5 PEAK OUTPUT POWER.....	8
5.1 MEASUREMENT PROCEDURE	8
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	8
5.3 MEASUREMENT EQUIPMENT USED.....	8
5.4 LIMITS AND MEASUREMENT RESULT	9
6 6 DB BANDWIDTH.....	11
6.1 MEASUREMENT PROCEDURE	11
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	11
6.3 MEASUREMENT EQUIPMENT USED.....	11
6.4 LIMITS AND MEASUREMENT RESULTS.....	11
7. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY.....	19
7.1 MEASUREMENT PROCEDURE	19
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	19
7.3 MEASUREMENT EQUIPMENT USED.....	19
7.4 LIMITS AND MEASUREMENT RESULT	19
8. RADIATED EMISSION MEASUREMENT	25
8.1 MEASUREMENT PROCEDURE	25
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	25
8.3 MEASUREMENT EQUIPMENT USED.....	26
8.4 LIMITS AND MEASUREMENT RESULT	27
9 BAND EDGE EMISSION.....	32
9.1 MEASUREMENT PROCEDURE	32
9.2 TEST SET-UP	32
9.3 TEST RESULT	32
10 FCC LINE CONDUCTED EMISSION TEST	41
10.1 LIMITS OF LINE CONDUCTED EMISSION TEST	41
10.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	41
10.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	42
10.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	42
10.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST.....	43

APPENDIX I.....	45
PHOTOGRAPHS OF THE EUT.....	45
APPENDIX II.....	52
PHOTOGRAPHS OF THE TEST SETUP	52

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

The EUT is a GSM/WCDMA mobile phone/Smart phone (Fusion) designed as an “Wifi Device”. It is designed by way of utilizing the DS/SS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.412 GHz to 2.462GHz
Max. Output Power	11b:12.88 dBm,11g:11.74 dBm,11n(20):11.38 dBm
Modulation	DS/SS,OFDM
Data Rate	DS/SS(1/2/5.5/11),OFDM(6/9/12/18/24/36/48/54) See section 1.3 for 802.11n
Number of channels	11
Antenna Designation	Integrated Antenna
Antenna Gain(WIFI)	1.1dBi(Max.)
Power Supply	DC 3.7V by battery

1.2 TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	1	2412MHZ
	2	2417MHZ
	3	2422 MHZ
	4	2427 MHZ
	5	2432 MHZ
	6	2437 MHZ
	7	2442 MHZ
	8	2447 MHZ
	9	2452 MHZ
	10	2457 MHZ
	11	2462MHZ

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11

1.3 IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	Modilation	R	NBPSC	NCBPS	NCBPS	Data Rate(Mbps)
							800nsGI
					20MHz	20MHz	20MHz
0	1	BPSK	1/2	1	52	26	6.5
1	1	QPSK	1/2	2	104	52	13.0
2	1	QPSK	3/4	2	104	78	19.5
3	1	16-QAM	1/2	4	208	104	26.0
4	1	16-QAM	3/4	4	208	156	39.0
5	1	64-QAM	2/3	6	312	208	52.0
6	1	64-QAM	3/4	6	312	234	58.5
7	1	64-QAM	5/6	6	312	260	65.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

1.4 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: JJMFUSION**, filing to comply with the FCC Part 15 and RSS-210 requirements.

1.5 TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.6 TEST FACILITY

The test site used to collect the radiated data is located on the address of Attestation of Global Compliance Co., Ltd. 2F., No.2 Building, Huafeng No.1 Technical Industrial Park, Sanwei, Xixiang, Baoan District, Shenzhen. The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 and IC requirements in documents RS212.

FCC register No.: 259865

1.7 SPECIAL ACCESSORIES

Refer to section 2.2.


1.8 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2. SYSTEM TEST CONFIGURATION

2.1 CONFIGURATION OF EUT SYSTEM

Configure 1:



2.2 EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Note
1	GSM/WCDMA mobile phone/ Smart phone (Fusion)	QS-G3UCT1BK	FCC ID: JJMFUSION	EUT
2	Adapter	Fusion	N/A	Accessory
3	Battery	Fusion	N/A	Accessory
4	Earphone	N/A	N/A	Accessory
5	USB Cable	N/A	N/A	Accessory

Note: All the accessories have been used during the test except earphone.

The EUT in test setup diagram means "EUT system".

3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Peak Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant

4. DESCRIPTION OF TEST MODES

TEST MODES
Transmit by 802.11b with Date rate(1/2/5.5/11)
Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54)
Transmit by 802.11n (20MHz) with Date rate(6.5/13/19.5/26/39/52/58.5/65)
Normal (Wi-Fi)

Note: 1 The EUT has been set to operate continuously on the lowest, middle and highest operation frequency individually.

2 All modes under which configuration applicable have been tested and the worst mode test data recording in the test report.


3 For Radiated Emission, 3 axis were chosen for testing for each applicable modes.

5. PEAK OUTPUT POWER

5.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Connect EUT RF output port to power meter through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Set the RBW greater than 6DB bandwidth of emission.
5. Record the maximum power from the power meter.

5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

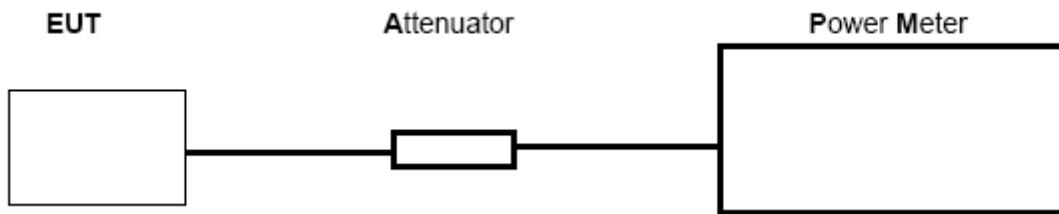

5.3 MEASUREMENT EQUIPMENT USED

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Power meter	Agilent	N1911A	N/A	06/27/2011	06/26/2012
Power sensor	Agilent	N192XA	N/A	06/27/2011	06/26/2012
RF attenuator	N/A	RFA20db	N/A	N/A	N/A
AGILENT	Agilent	E4440A	N/A	06/27/2011	06/26/2012

5.4 LIMITS AND MEASUREMENT RESULT

TEST ITEM	PEAK POWER
TEST MODE	802.11b with data rate 1

LIMITS AND MEASUREMENT RESULT				
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	12.21	12.88	30	Pass
2.437	12.13	12.81	30	Pass
2.462	7.14	7.56	30	Pass

TEST ITEM	PEAK POWER
TEST MODE	802.11g with data rate 6

LIMITS AND MEASUREMENT RESULT				
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	10.25	11.74	30	Pass
2.437	11.18	11.67	30	Pass
2.462	7.05	7.33	30	Pass

TEST ITEM	PEAK POWER
TEST MODE	802.11n 20 with data rate 6.5


LIMITS AND MEASUREMENT RESULT				
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	10.89	11.38	30	Pass
2.437	10.77	11.31	30	Pass
2.462	6.83	7.15	30	Pass

6. 6 DB BANDWIDTH

6.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz,
VBW= 100 KHz.
4. Set SPA Trace 1 Max hold, then View.

6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

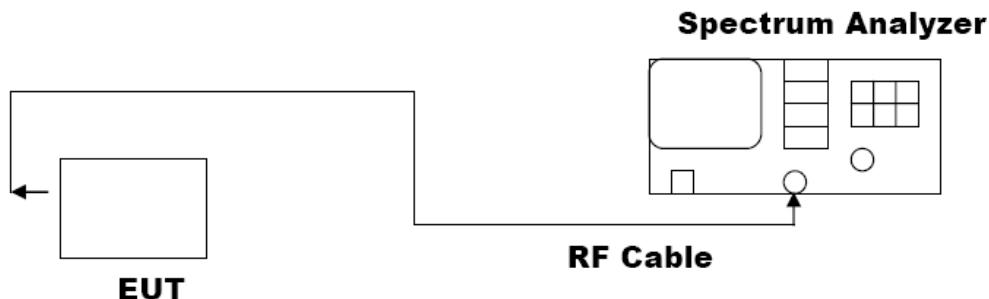

6.3 MEASUREMENT EQUIPMENT USED

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	06/27/2011	06/26/2012
RF attenuator	N/A	RFA20db	N/A	N/A	N/A

6.4 LIMITS AND MEASUREMENT RESULTS

TEST ITEM	6DB BANDWIDTH
TEST MODE	802.11b with data rate 11

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
>500KHZ	Low Channel	10.13	PASS
	Middle Channel	10.08	PASS
	High Channel	10.15	PASS

TEST ITEM	6DB BANDWIDTH		
TEST MODE	802.11g with data rate 54		

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)	Criteria	
>500KHZ	Low Channel	16.58	PASS
	Middle Channel	16.70	PASS
	High Channel	16.69	PASS

TEST ITEM	6DB BANDWIDTH		
TEST MODE	802.11n 20 with data rate 65		

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)	Criteria	
>500KHZ	Low Channel	17.79	PASS
	Middle Channel	17.76	PASS
	High Channel	17.83	PASS

TEST ITEM	99% OBW		
TEST MODE	802.11b with data rate 11		

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)	Criteria	
>500KHZ	Low Channel	14.10	PASS
	Middle Channel	14.07	PASS
	High Channel	14.29	PASS

TEST ITEM	99% OBW		
TEST MODE	802.11g with data rate 54		


LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)	Criteria	
>500KHZ	Low Channel	16.69	PASS
	Middle Channel	16.97	PASS
	High Channel	16.87	PASS

TEST ITEM	99% OBW		
TEST MODE	802.11n 20 with data rate 65		


LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)	Criteria	
>500KHZ	Low Channel	17.78	PASS
	Middle Channel	17.74	PASS
	High Channel	17.75	PASS

802.11b TEST RESULT


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

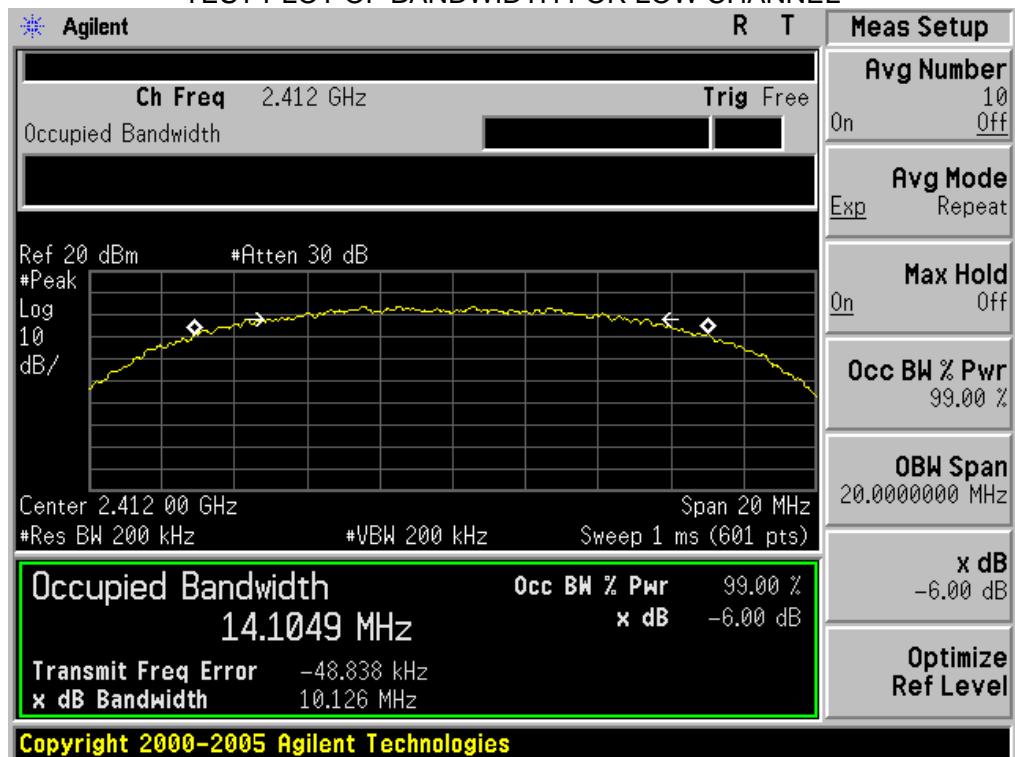

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

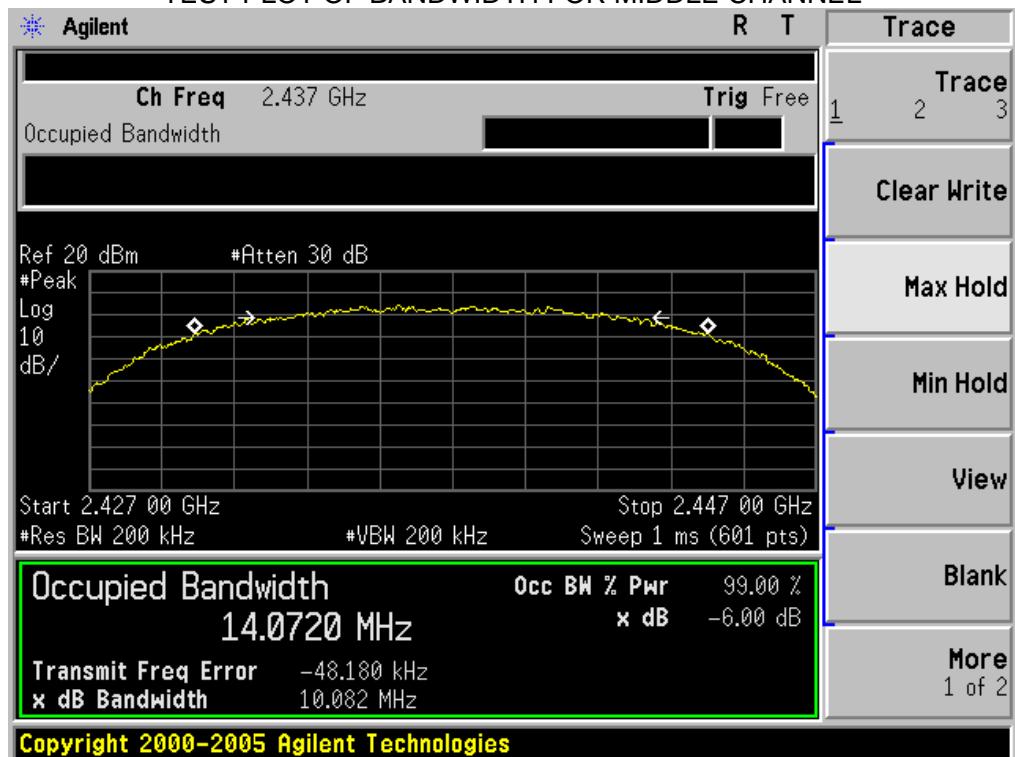


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

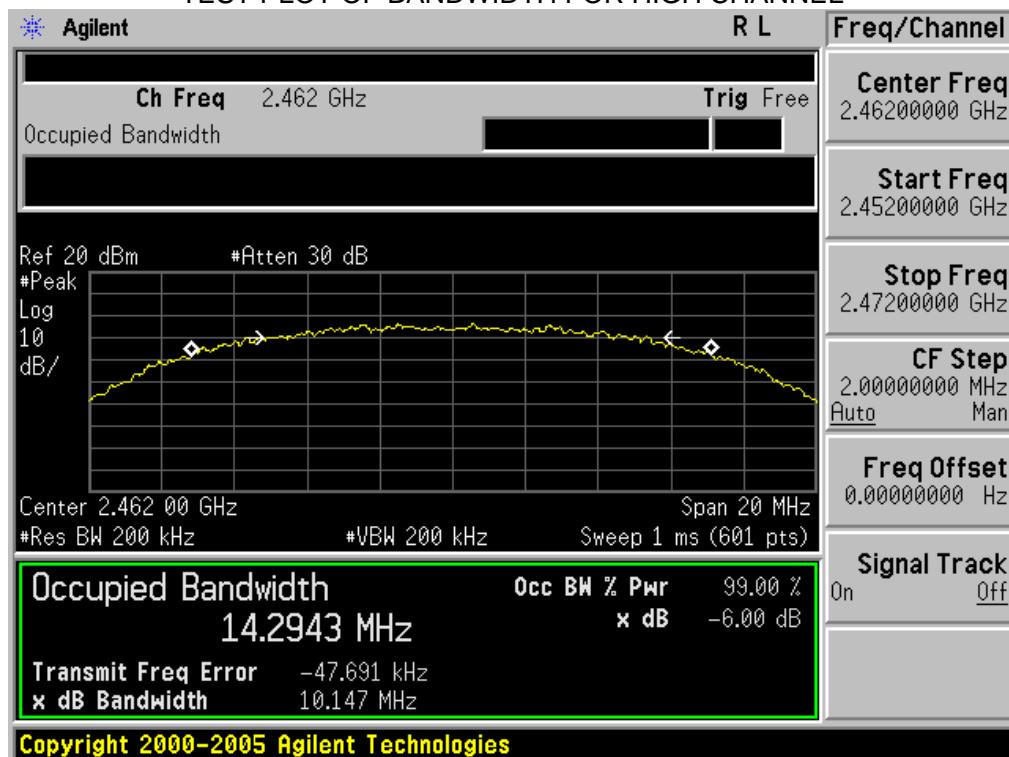


802.11g TEST RESULT


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

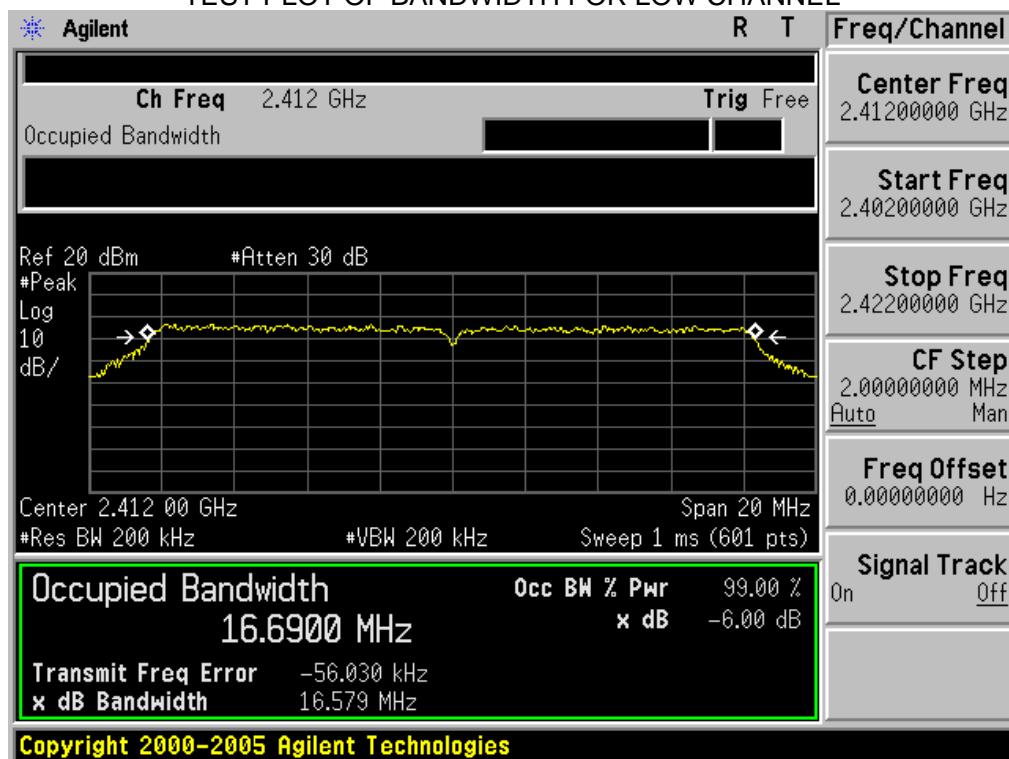

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

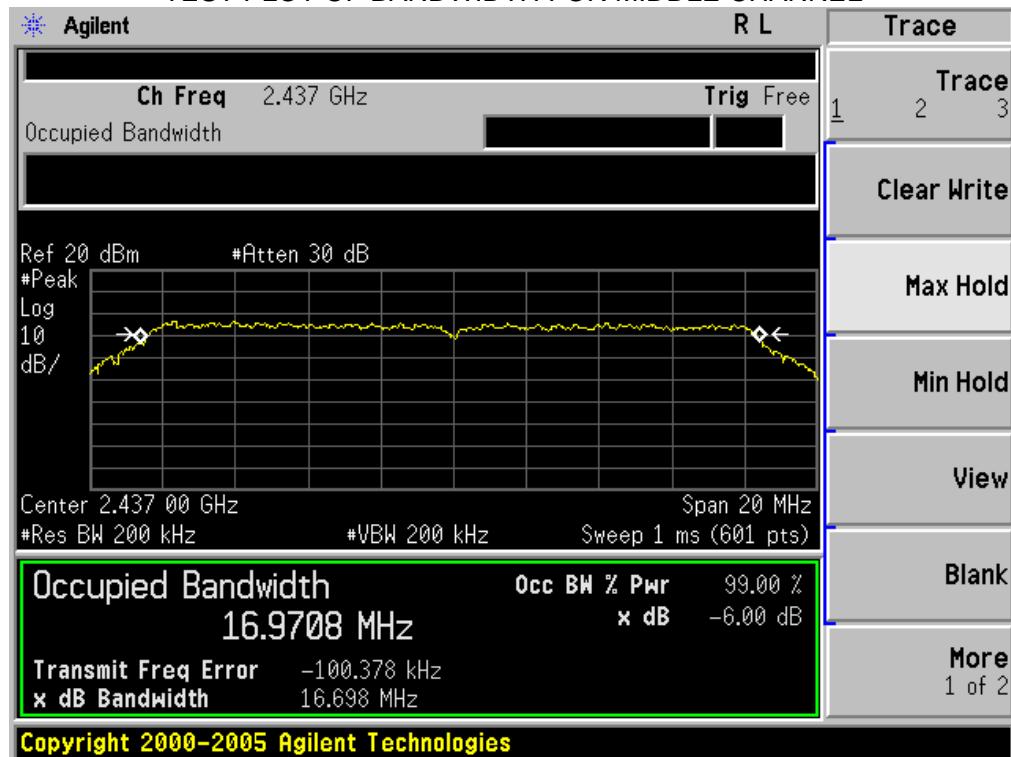


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

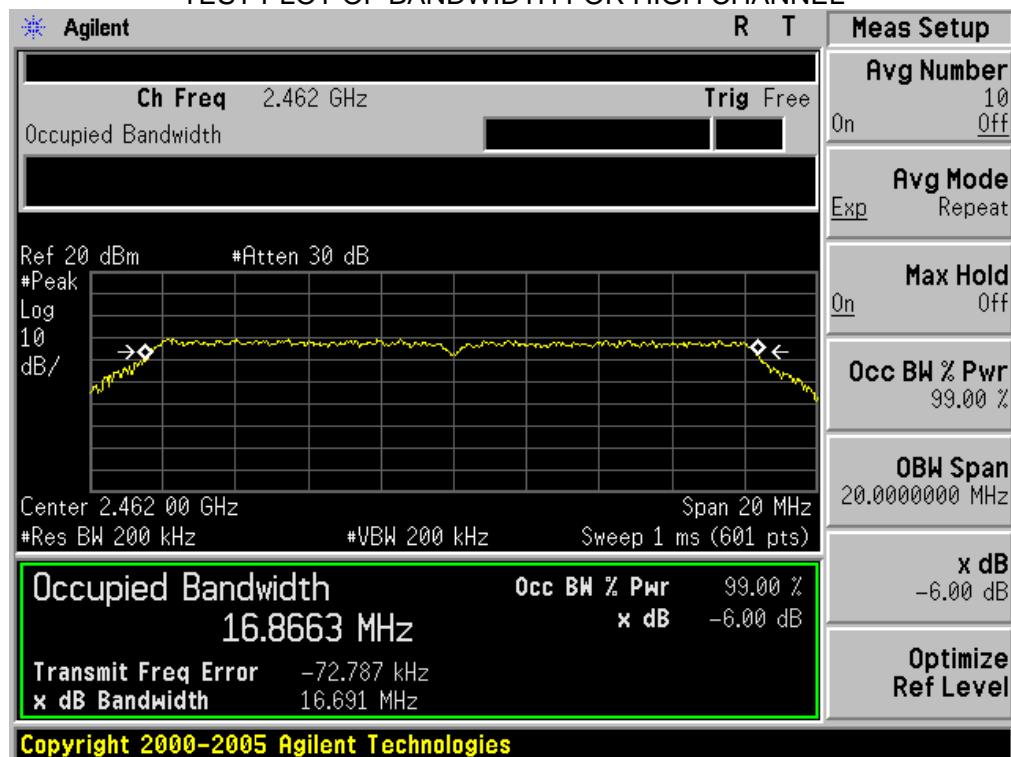



802.11n(20) TEST RESULT

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

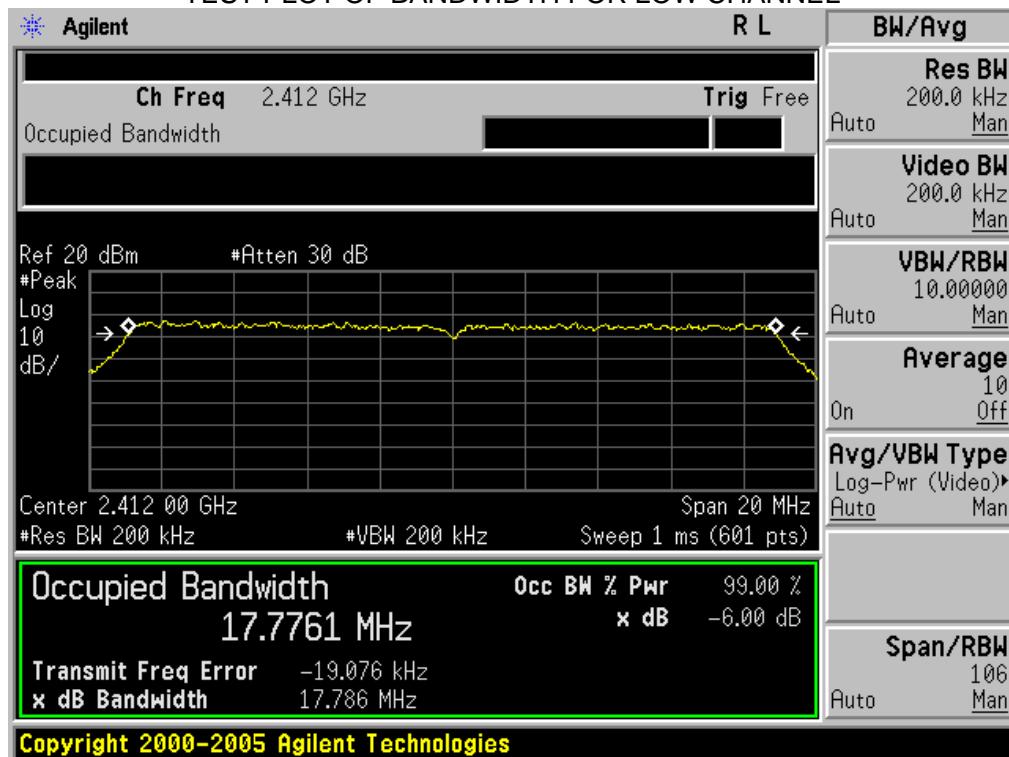

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

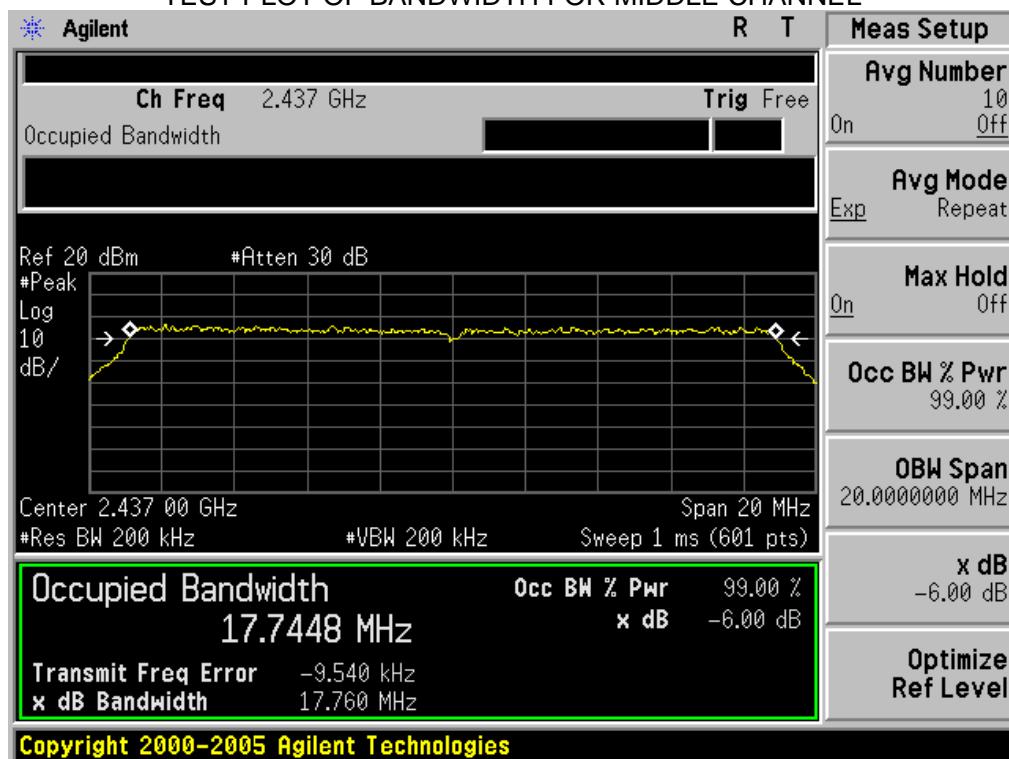

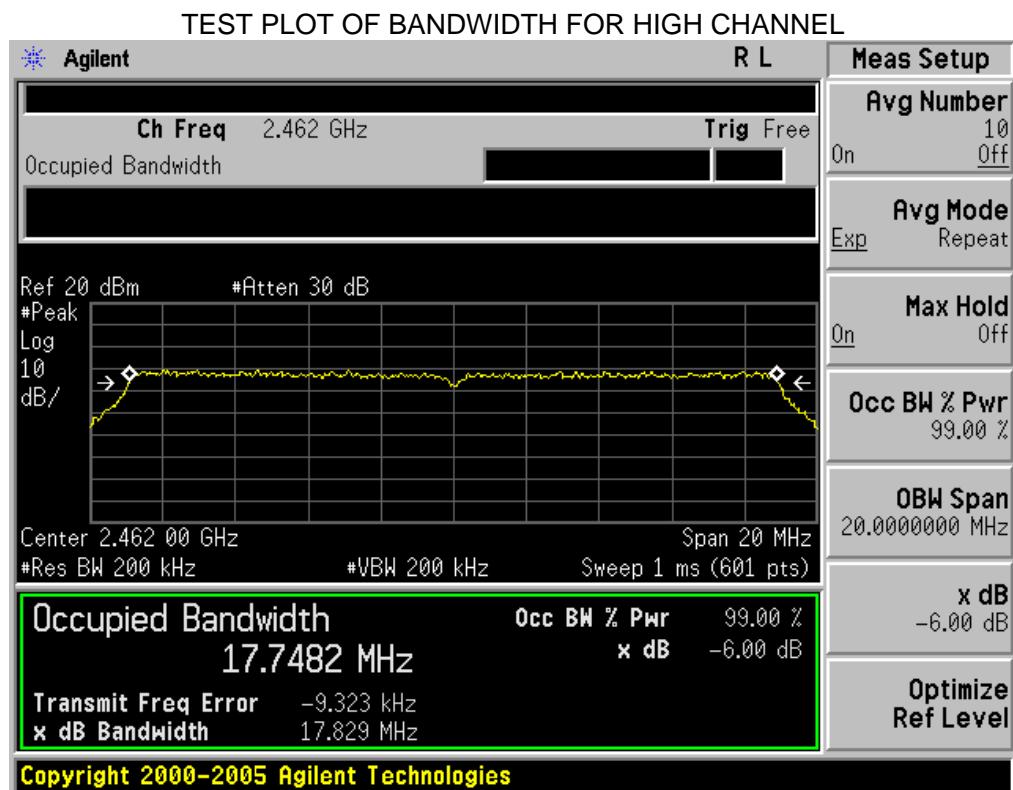

7. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

7.1 MEASUREMENT PROCEDURE

- (1). The EUT was placed on a turn table which is 0.8m above ground plane.
- (2). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (3). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (4). Set SPA Centre Frequency = Operation Frequency, RBW= 3 KHz,
VBW= 3 KHz., Sweep time= AUTO
- (5). Set SPA Trace 1 Max hold, then View.

7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer To Section 6.2

7.3 MEASUREMENT EQUIPMENT USED

Refer To Section 6.3

7.4 LIMITS AND MEASUREMENT RESULT

TEST ITEM	POWER PECTRAL DENSITY	
TEST MODE	802.11b with data rate 1	

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (dBm/3KHz)	Criteria	
8 dBm / 3KHz	Low Channel	-12.42	Pass
	Middle Channel	-12.11	Pass
	High Channel	-19.99	Pass


TEST ITEM	POWER PECTRAL DENSITY	
TEST MODE	802.11b with data rate 6	

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (dBm/3KHz)	Criteria	
8 dBm / 3KHz	Low Channel	-22.82	Pass
	Middle Channel	-22.24	Pass
	High Channel	-29.86	Pass


TEST ITEM	POWER PECTRAL DENSITY
TEST MODE	802.11n 20 with data rate 6.5

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (dBm/3KHz)	Criteria	
8 dBm / 3KHz	Low channel	-21.71	Pass
	Middle Channel	-21.11	Pass
	High channel	-28.44	Pass


802.11b TEST RESULT
TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

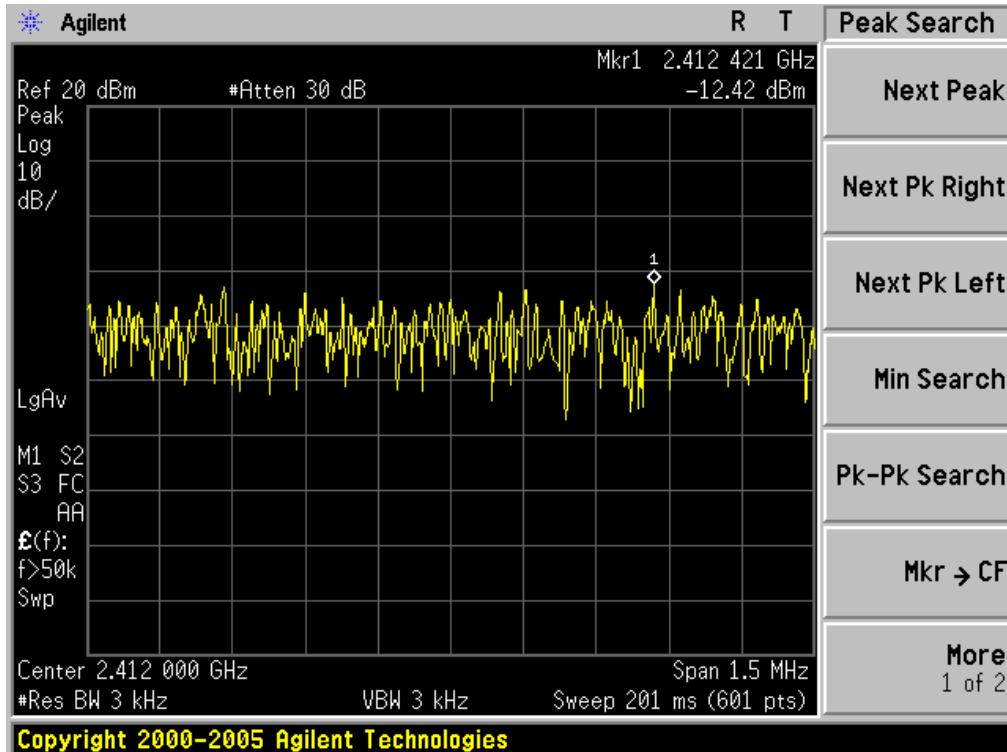

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

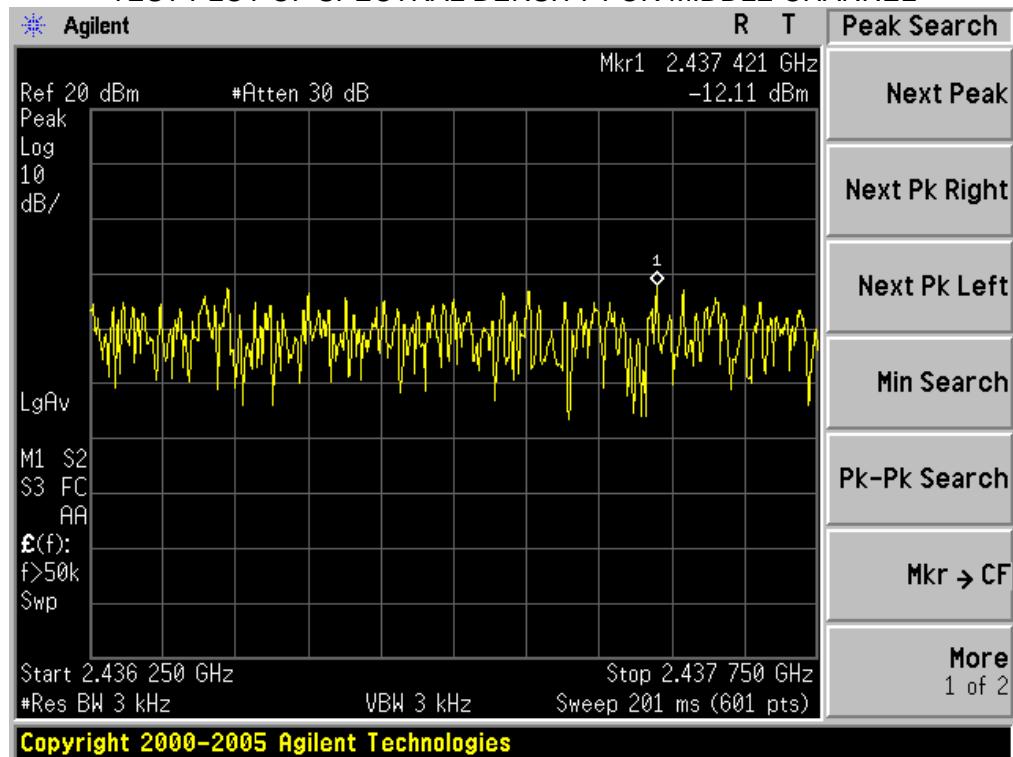


TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

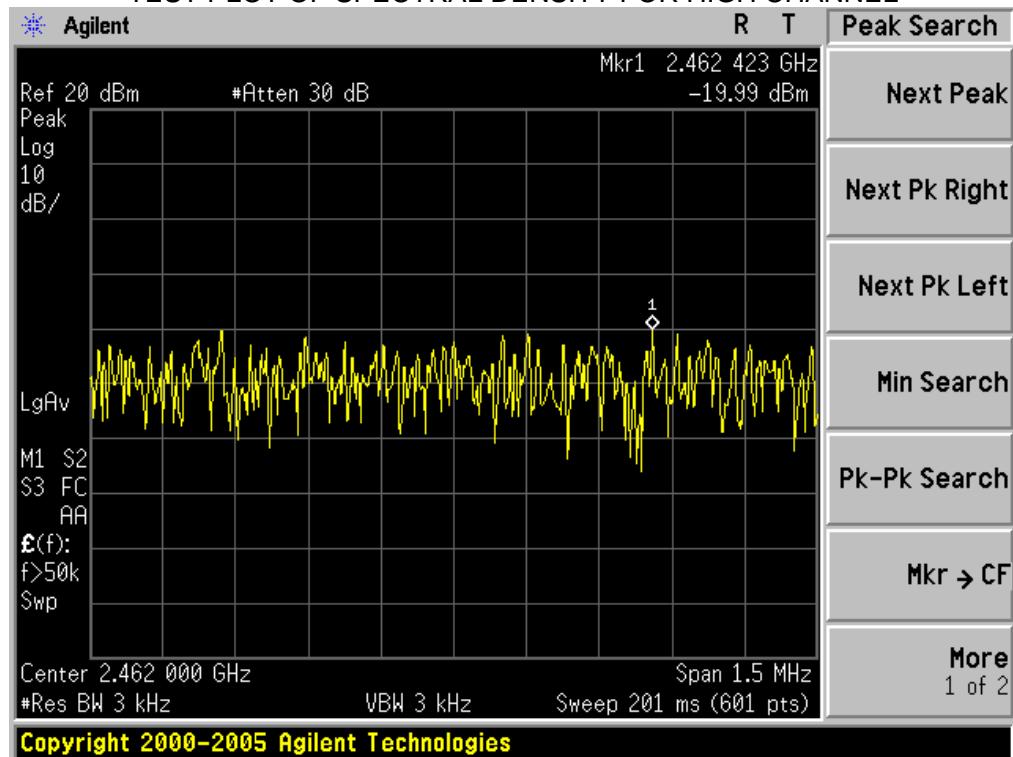


802.11g TEST RESULT


TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

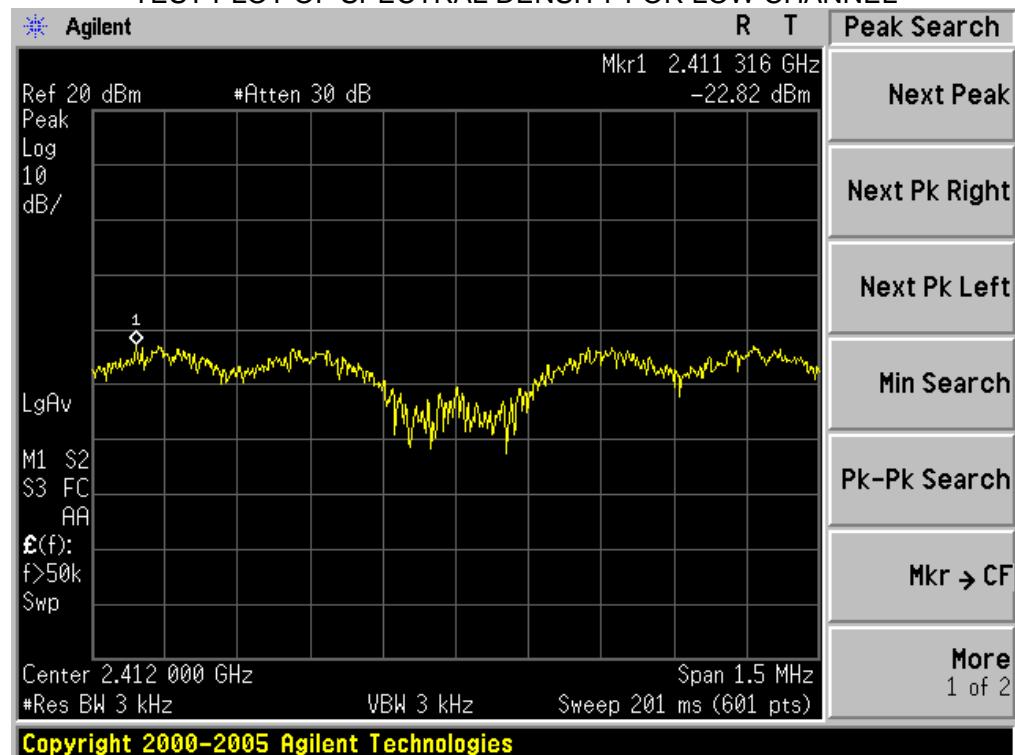

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

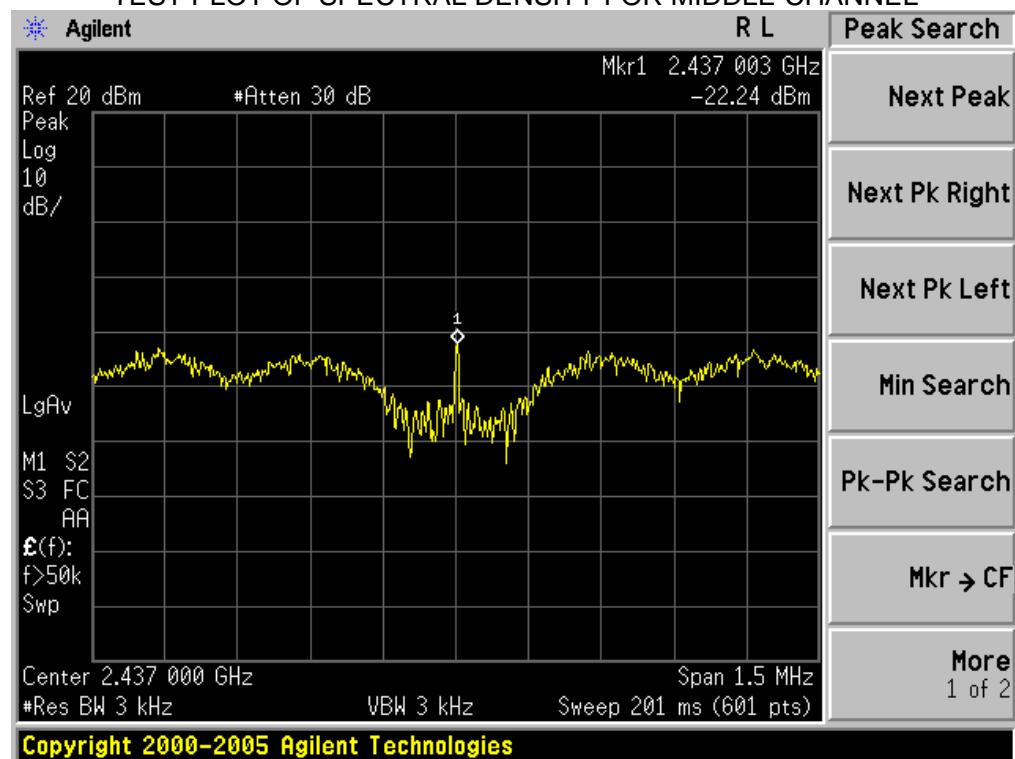


TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

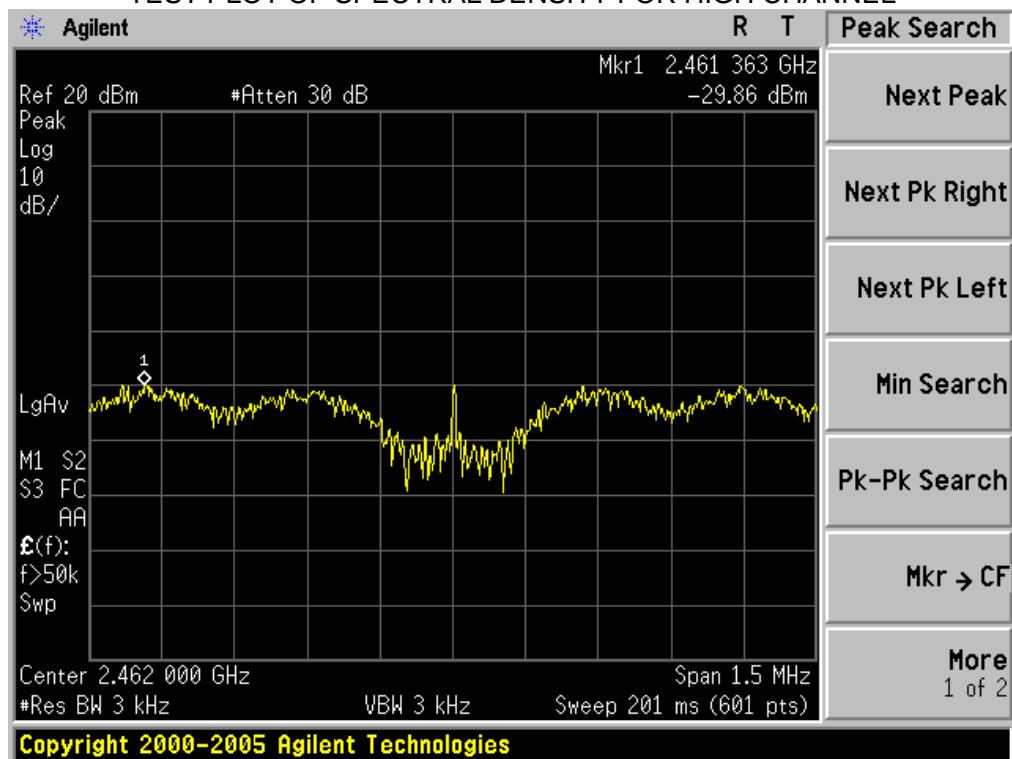


802.11n(20) TEST RESULT


TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

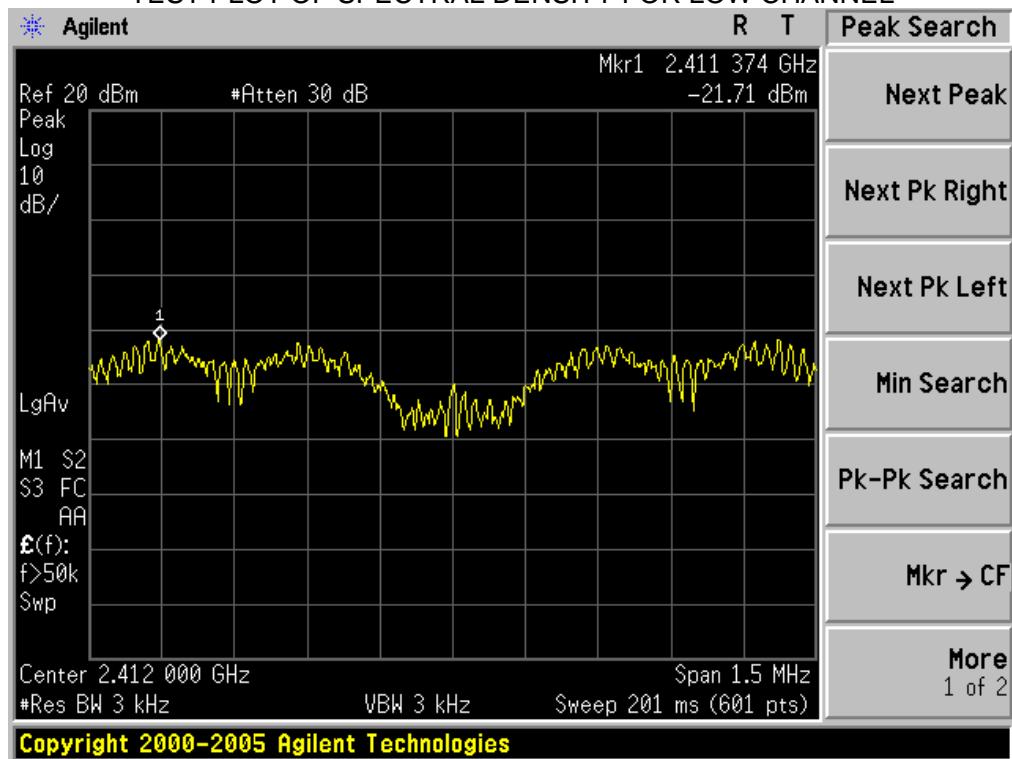

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

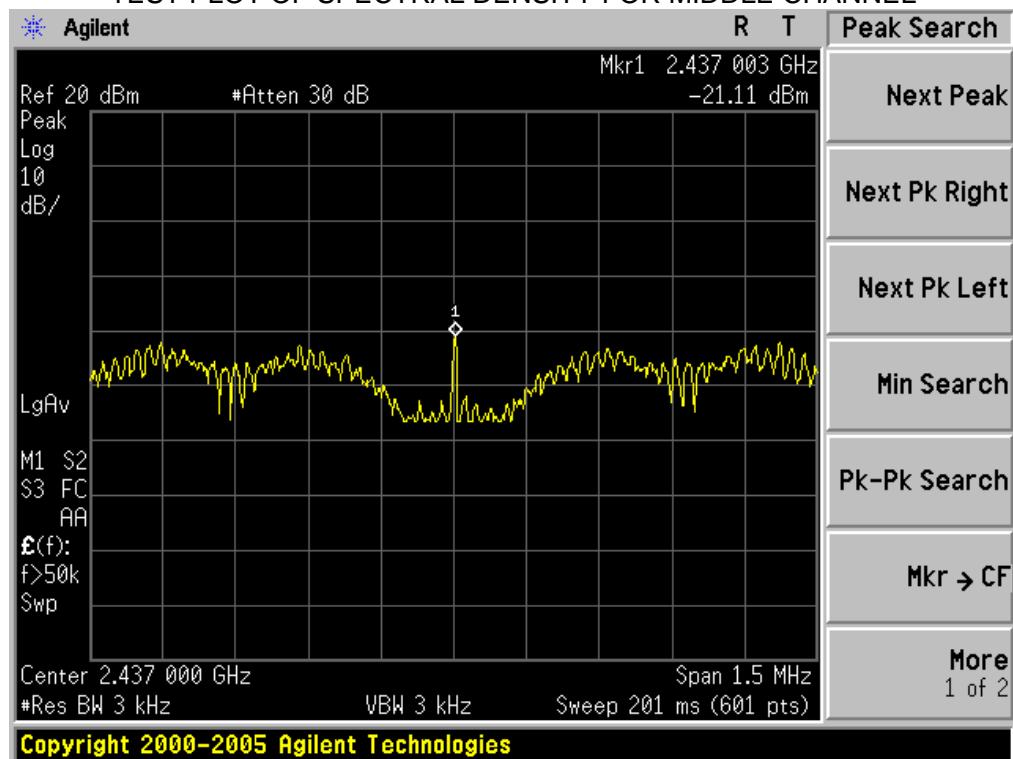

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

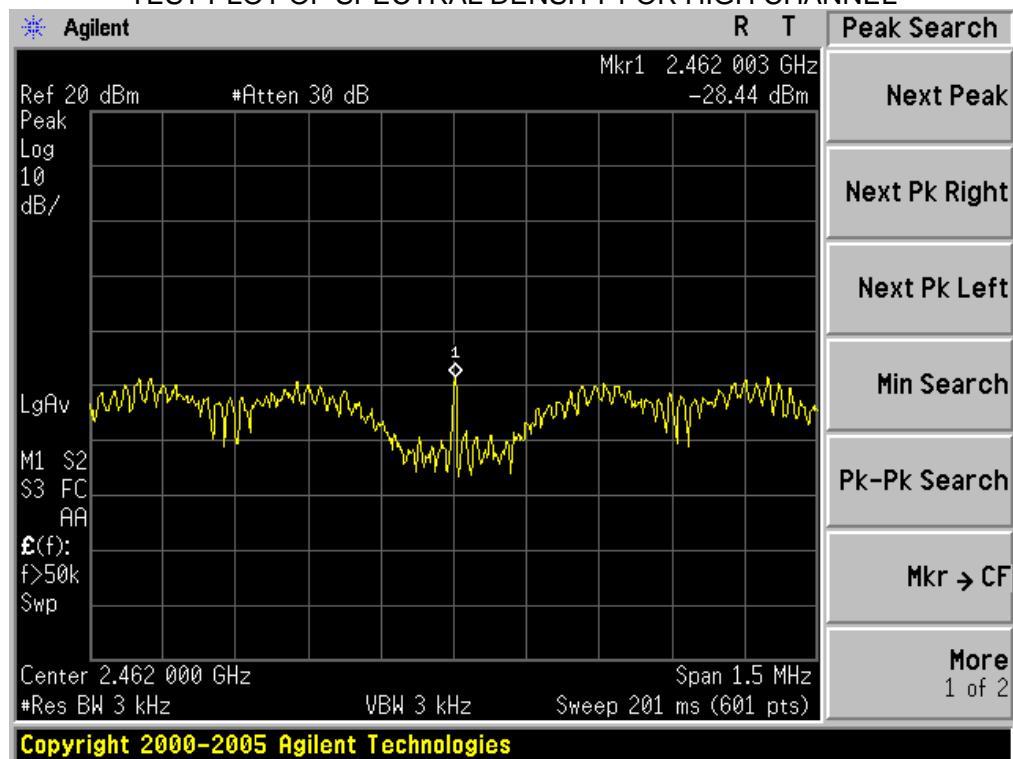


8. RADIATED EMISSION MEASUREMENT

8.1 MEASUREMENT PROCEDURE


- 1 Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 Meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2 Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine The position of the highest radiation.
- 3 The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4 For each suspected emissions, the antenna tower was scan (from 1M to 4M) and then the turntable was Rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5 Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode
- 6 For emission above 1GHZ, use 1MHZ VBW and RBW for peak reading. Then 1MHZ RBW and 10Hz VBW For average reading in spectrum analyzer.
- 7 When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one Complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the Pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 seconds interval during which the field strength is at its maximum value.
- 8 If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9 For testing above 1GHZ, the emissions level of the EUT in peak mode was lower than average limit (that Means the emissions level in peak mode also complies with the limit in average mode) then testing will be Stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average Mode again and reported.
- 10 in case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded Data should be QP measured by receiver. High-Low scan is not required in this case.

8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


RADIATED EMISSION TEST SETUP BELOW 30MHz

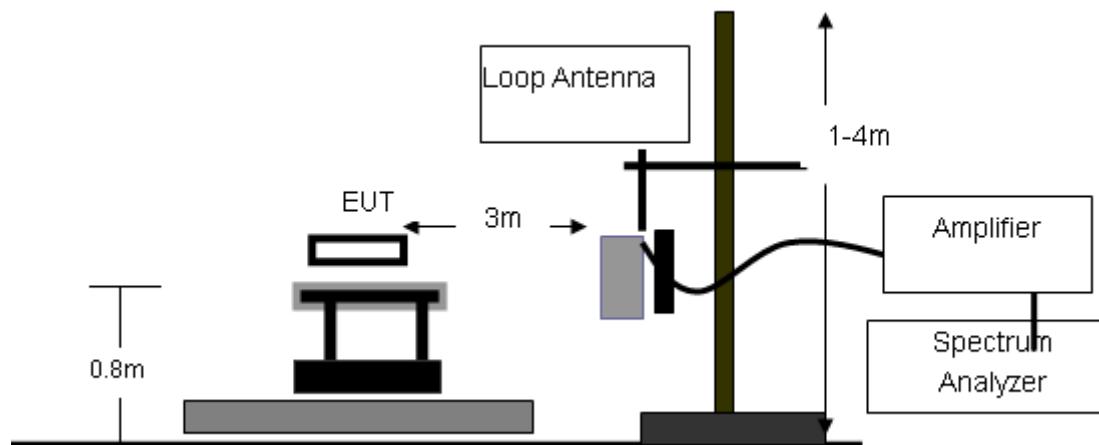

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

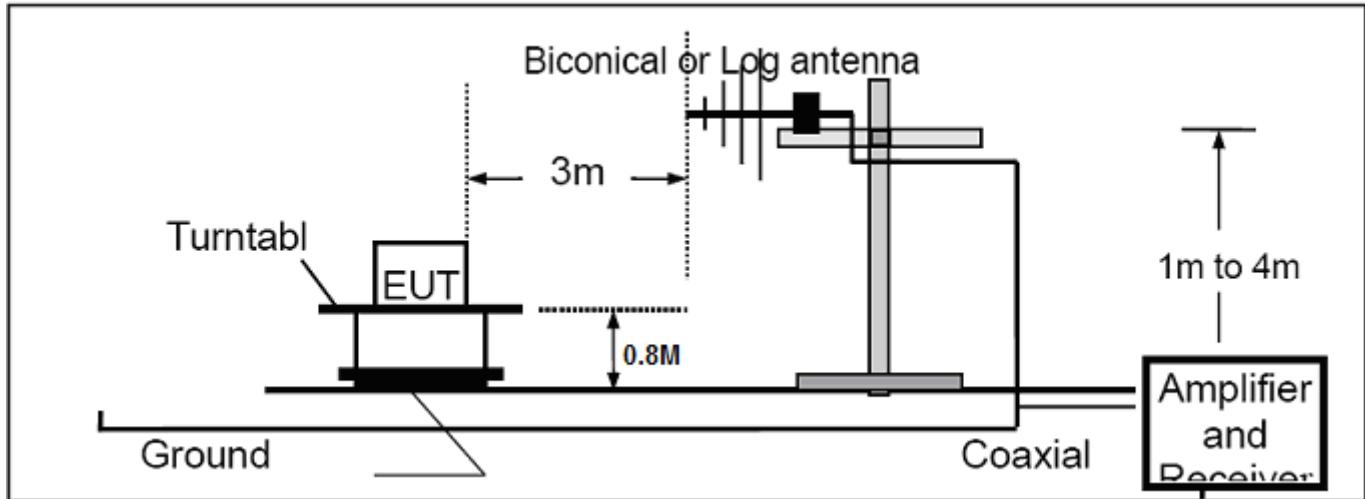

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

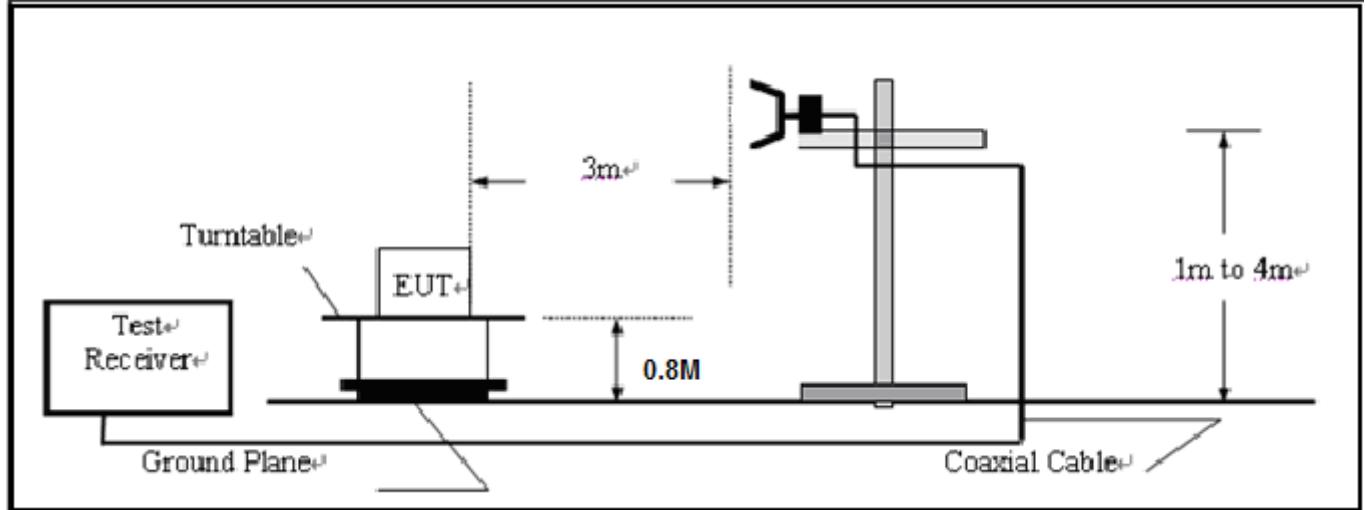

8.3 MEASUREMENT EQUIPMENT USED

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	06/27/2011	06/26/2012
Amplifier	EM	EM30180	0607030	06/27/2011	06/26/2012
Horn Antenna	EM	EM-AH-10180	N/A	06/27/2011	06/26/2012
Horn Antenna	A.H. Systems Inc.	SAS-574	--	06/27/2011	06/26/2012
EMI Test Receiver	Rohde & Schwarz	ESCI	N/A	06/27/2011	06/26/2012
Amplifier	EM	EM30180	N/A	06/27/2011	06/26/2012
Biological Antenna	A.H. Systems Inc.	SAS-521-4	N/A	06/27/2011	06/26/2012
Loop Antenna	A.H.	SAS-526B	264	06/27/2011	06/26/2012
Isolation Transformer	LETEAC	LTBK	--	06/27/2011	06/26/2012

8.4 LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed


Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested For restricted band radiated emission,
the test records reported below are the worst result compared to other modes.

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequency to 30MHz.

RADIATED EMISSION BELOW 1GHZ

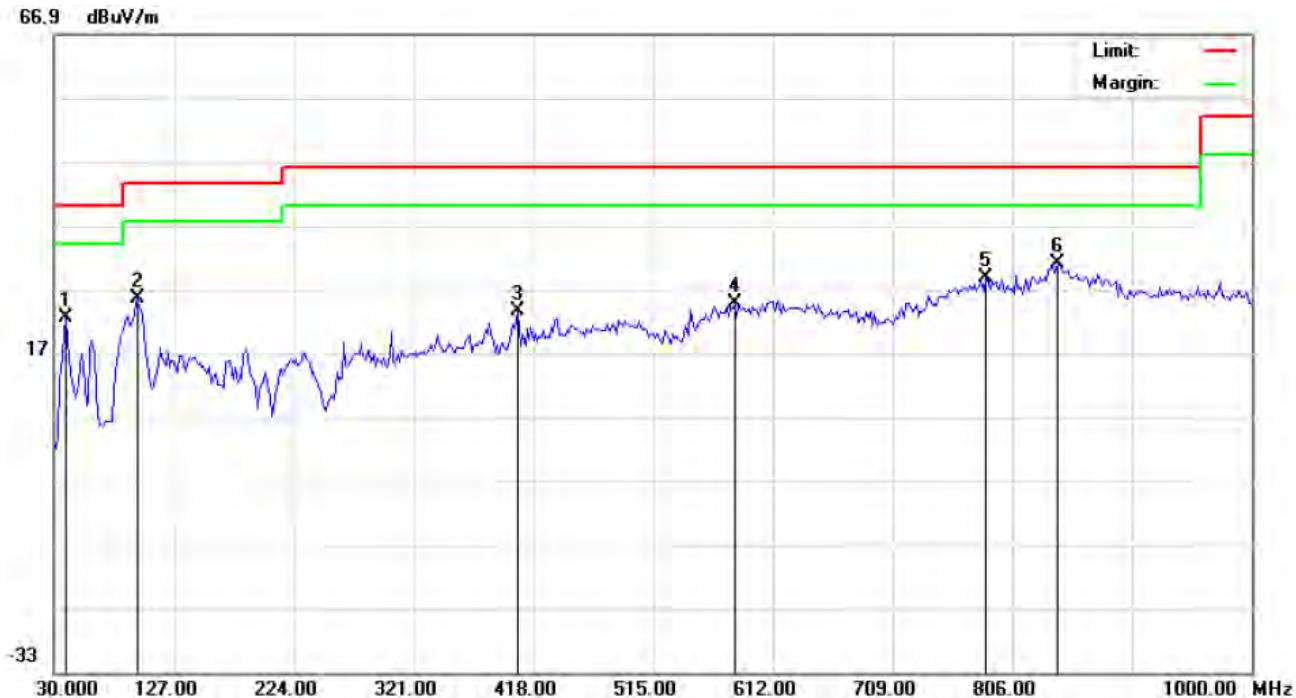

Site: site #1 Polarization: Horizontal Temperature: 26

Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %

EUT: GSM/WCDMA mobile phone/Smart phone Distance:


M/N: QS-G3UCT1BK

Mode: 802.11b-CH1-rate 5.5

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		39.7000	14.64	7.98	22.62	40.00	-17.38	peak			
2		97.9000	12.24	13.24	25.48	43.50	-18.02	peak			
3		405.0667	6.42	17.00	23.42	46.00	-22.58	peak			
4		581.2833	0.10	24.68	24.78	46.00	-21.22	peak			
5		784.9833	0.73	28.11	28.84	46.00	-17.16	peak			
6	*	843.1833	-0.05	30.99	30.94	46.00	-15.06	peak			

66.9 dBuV/m

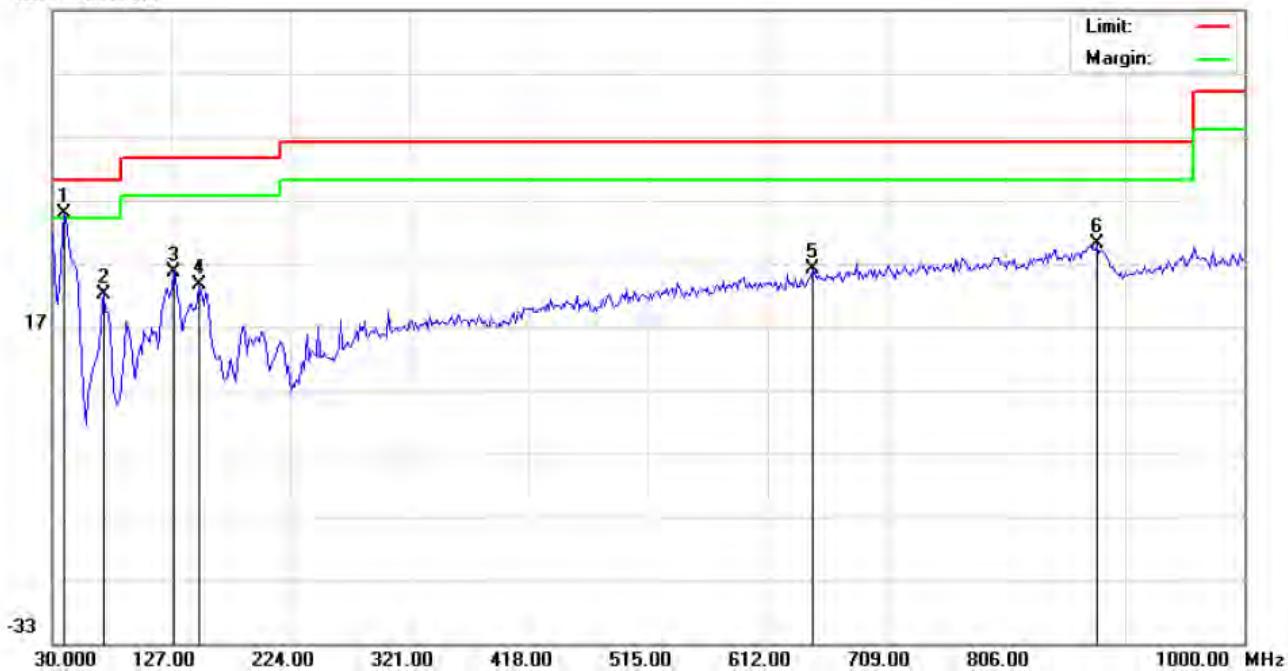

Site: site #1 Polarization: **Vertical** Temperature: 26

Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %

EUT: GSM/WCDMA mobile phone/Smart phone Distance:

M/N: QS-G3UCT1BK


Mode: 802.11b-CH1-rate 5.5

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	39.7000	28.87	5.88	34.75	40.00	-5.25	peak			
2		72.0333	17.17	4.84	22.01	40.00	-17.99	peak			
3		128.6167	15.60	9.81	25.41	43.50	-18.09	peak			
4		149.6333	4.58	18.90	23.48	43.50	-20.02	peak			
5		649.1833	0.74	25.24	25.98	46.00	-20.02	peak			
6		880.3667	-0.34	30.35	30.01	46.00	-15.99	peak			

Note: Measurement= Reading + Factor, Over=Measure-Limit.


RADIATED EMISSION ABOVE 1GHZ

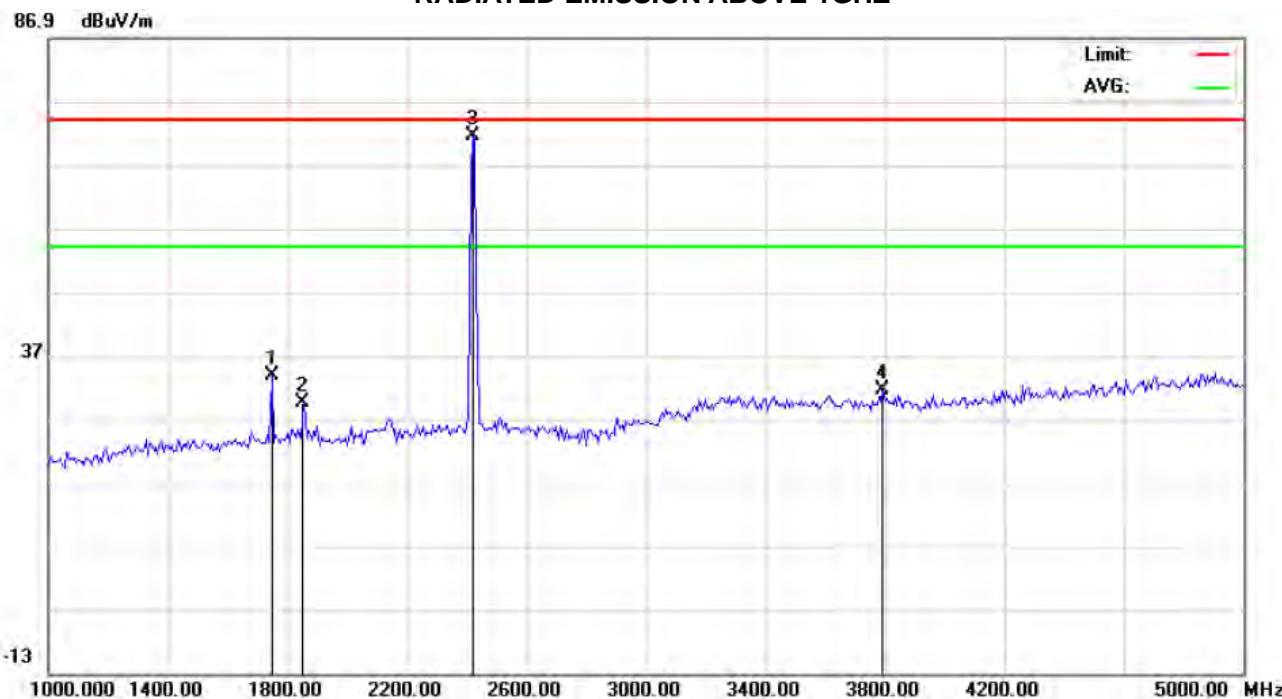

Site: site #1 Polarization: **Horizontal** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %
 EUT: GSM/WCDMA mobile phone/Smart phone Distance:
 M/N: QS-G3UCT1BK
 Mode: 802.11b-CH1-rate5.5
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1746.667	43.98	-10.25	33.73	74.00	-40.27	peak			
2		1853.333	39.57	-10.14	29.43	74.00	-44.57	peak			
3	*	2420.000	79.96	-8.32	71.64	74.00	-2.36	peak			
4		3793.333	38.75	-7.32	31.43	74.00	-42.57	peak			

86.9 dBuV/m

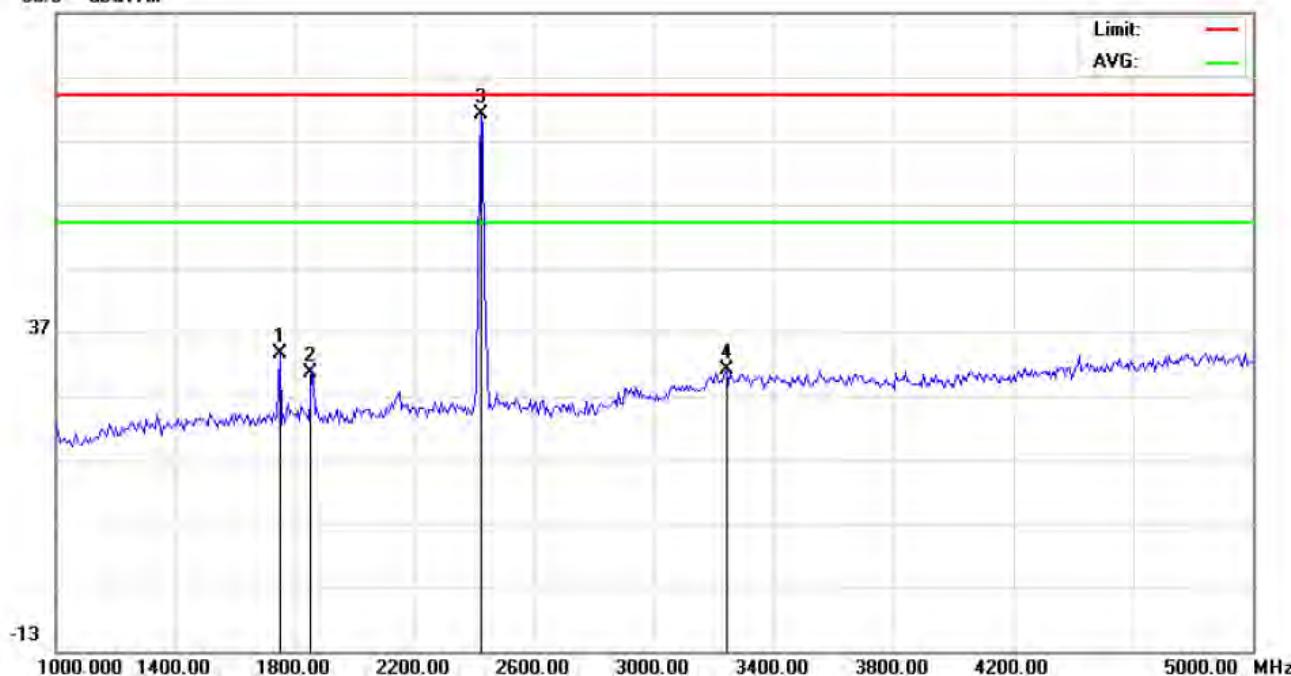

Site: site #1 Polarization: **Vertical** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %
 EUT: GSM/WCDMA mobile phone/Smart phone Distance:
 M/N: QS-G3UCT1BK
 Mode: 802.11b-CH1-rate 5.5
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1746.667	43.74	-10.25	33.49	74.00	-40.51	peak			
2		1853.333	40.76	-10.14	30.62	74.00	-43.38	peak			
3	*	2420.000	79.30	-8.32	70.98	74.00	-3.02	peak			
4		3240.000	39.29	-8.20	31.09	74.00	-42.91	peak			

Note: The other modes radiation emissions have more than 20dB margin.
 Measurement= Reading + Factor, Over=Measure-Limit.
 All modes radiation emission from 5GHz to 24GHz at least have 20dB margin.

9. BAND EDGE EMISSION

9.1 MEASUREMENT PROCEDURE


- 1, Set the EUT Work on the top, the bottom operation frequency individually.
2. Set SPA Start or Stop Frequency = Operation Frequency, RBW= 1MHz,
VBW= 1MHz.
3. The band edges was measured and recorded.

9.2 TEST SET-UP

The Same as described in section 8.2

9.3 TEST RESULT


86.9 dBuV/m

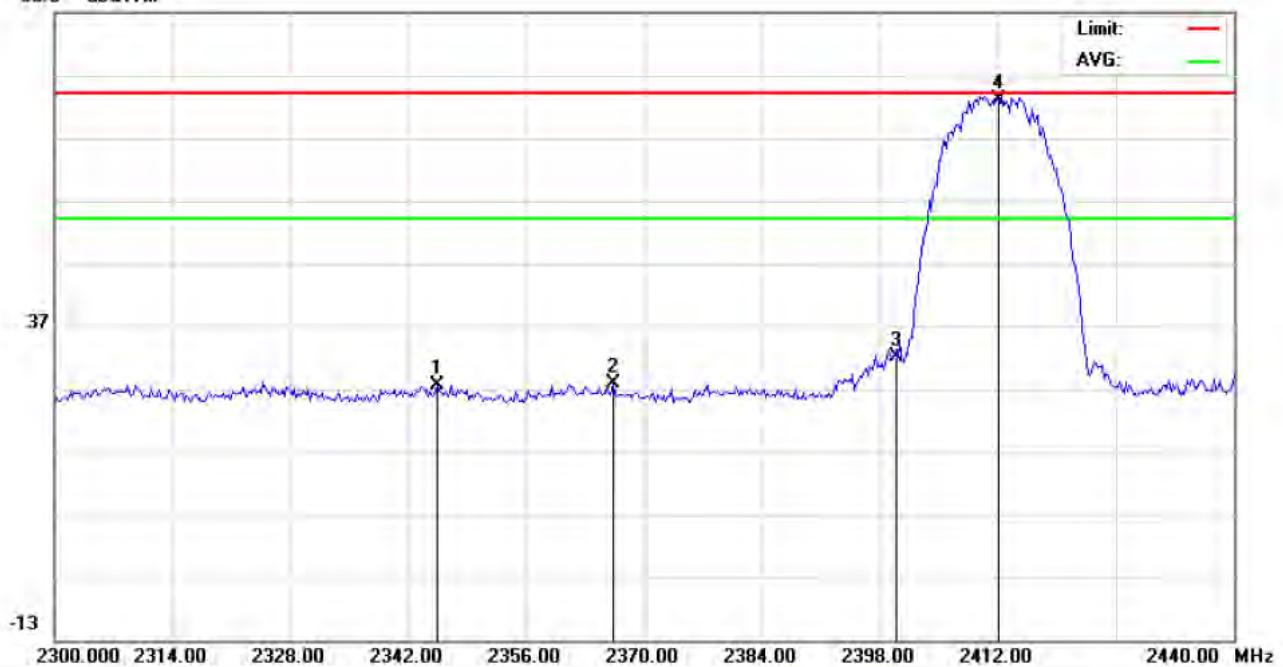

Site: site #1 Polarization: *Horizontal* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %
 EUT: GSM/WCDMA mobile phone/Smart phone Distance:
 M/N: QS-G3UCT1BK
 Mode: 802.11b-CH1-rate 5.5
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2345.500	36.17	-8.62	27.55	74.00	-46.45	peak			
2		2366.267	36.23	-8.53	27.70	74.00	-46.30	peak			
3		2400.000	40.38	-8.40	31.98	74.00	-42.02	peak			
4	*	2412.000	81.45	-8.35	73.10	74.00	-0.90	peak			

86.9 dB_{uV/m}

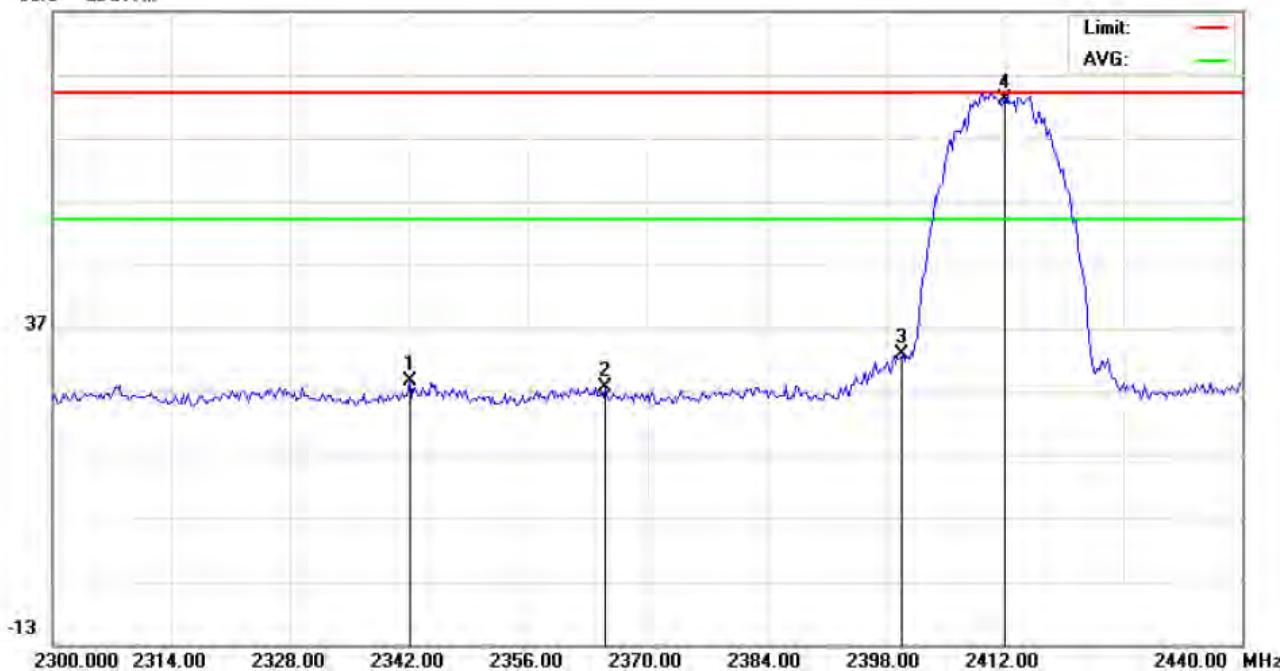

Site: site #1 Polarization: **Vertical** Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %


EUT: GSM/WCDMA mobile phone/Smart phone Distance:

M/N: QS-G3UCT1BK

Mode: 802.11b-CH1-rate 5.5

Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dB _{uV}	dB/m	dB _{uV/m}	dB _{uV/m}	dB		cm	degree	
1		2342.000	37.28	-8.63	28.65	74.00	-45.35	peak			
2		2365.100	36.10	-8.54	27.56	74.00	-46.44	peak			
3		2400.000	41.23	-8.40	32.83	74.00	-41.17	peak			
4	*	2412.000	81.37	-8.35	73.02	74.00	-0.98	peak			

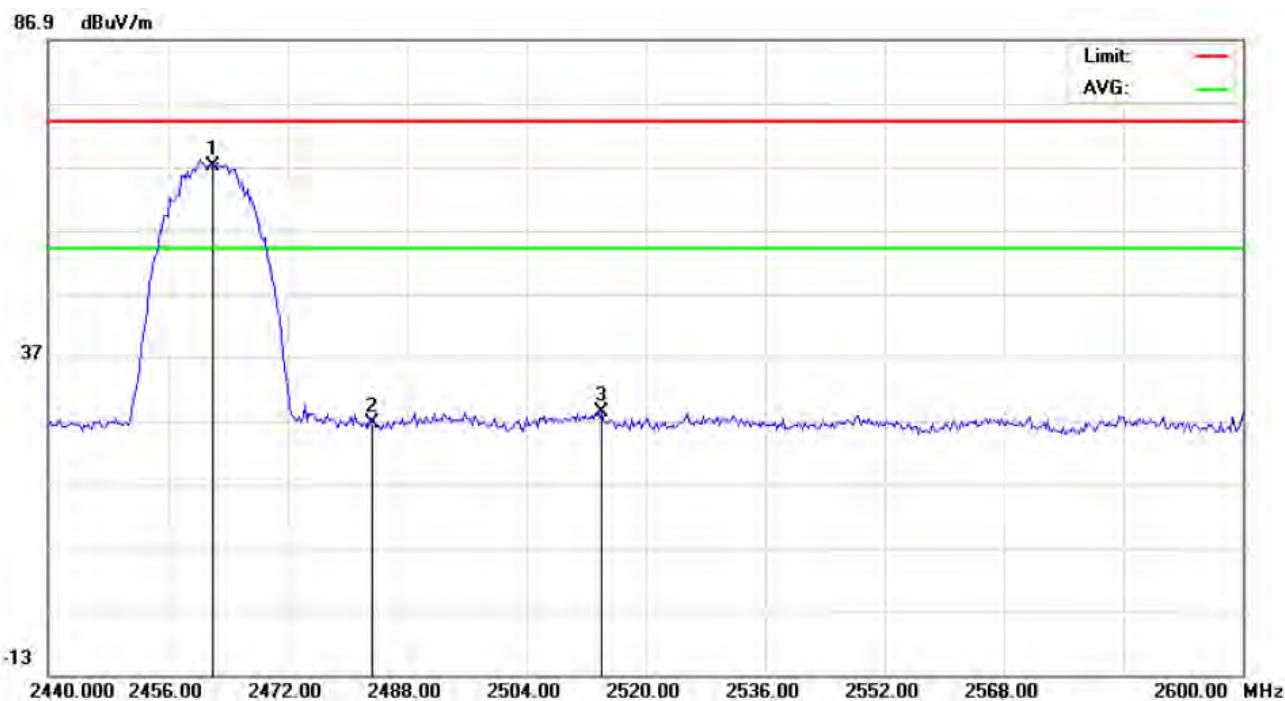

Site: site #1 Polarization: **Horizontal** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %
EUT: GSM/WCDMA mobile phone/Smart phone Distance:
M/N: QS-G3UCT1BK
Mode: 802.11b-CH11-rate5.5
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2462.000	75.19	-8.15	67.04	74.00	-6.96	peak			
2		2483.500	34.48	-8.07	26.41	74.00	-47.59	peak			
3		2514.133	36.31	-8.02	28.29	74.00	-45.71	peak			


86.9 dBuV/m

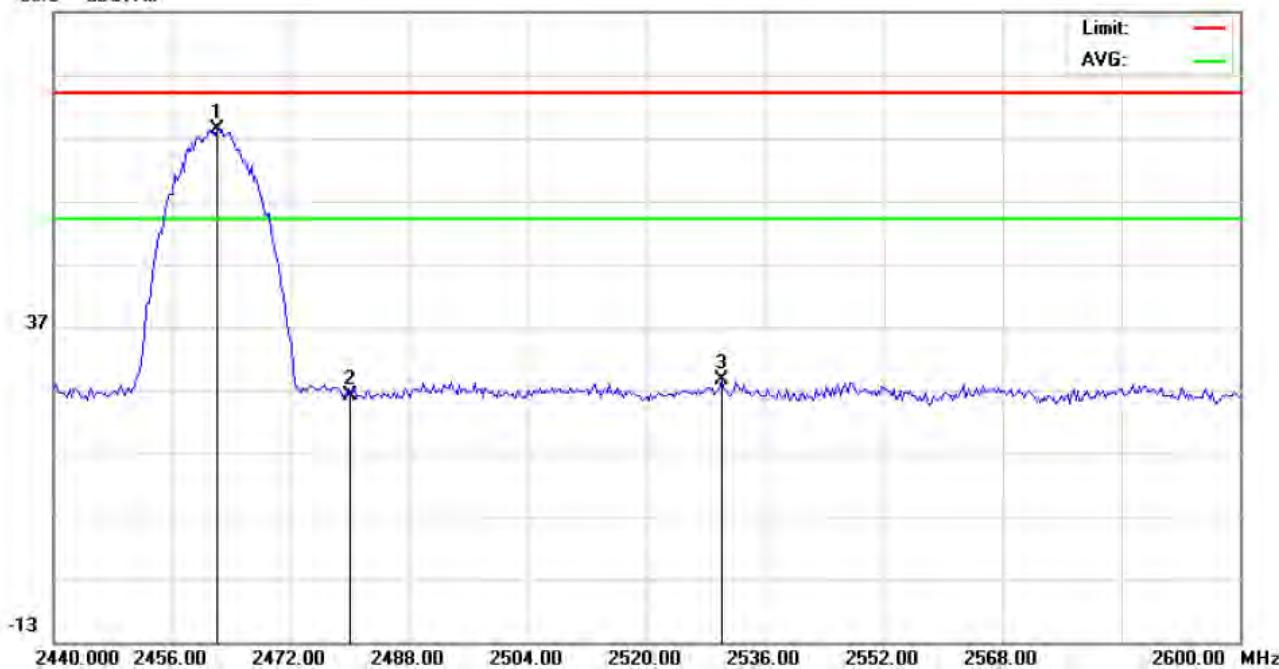

Site: site #1 Polarization: **Vertical** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %
 EUT: GSM/WCDMA mobile phone/Smart phone Distance:
 M/N: QS-G3UCT1BK
 Mode: 802.11b-CH1-rate5.5
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2462.000	76.47	-8.15	68.32	74.00	-5.68	peak			
2		2480.000	34.00	-8.08	25.92	74.00	-48.08	peak			
3		2530.133	36.53	-8.05	28.48	74.00	-45.52	peak			


86.9 dBuV/m

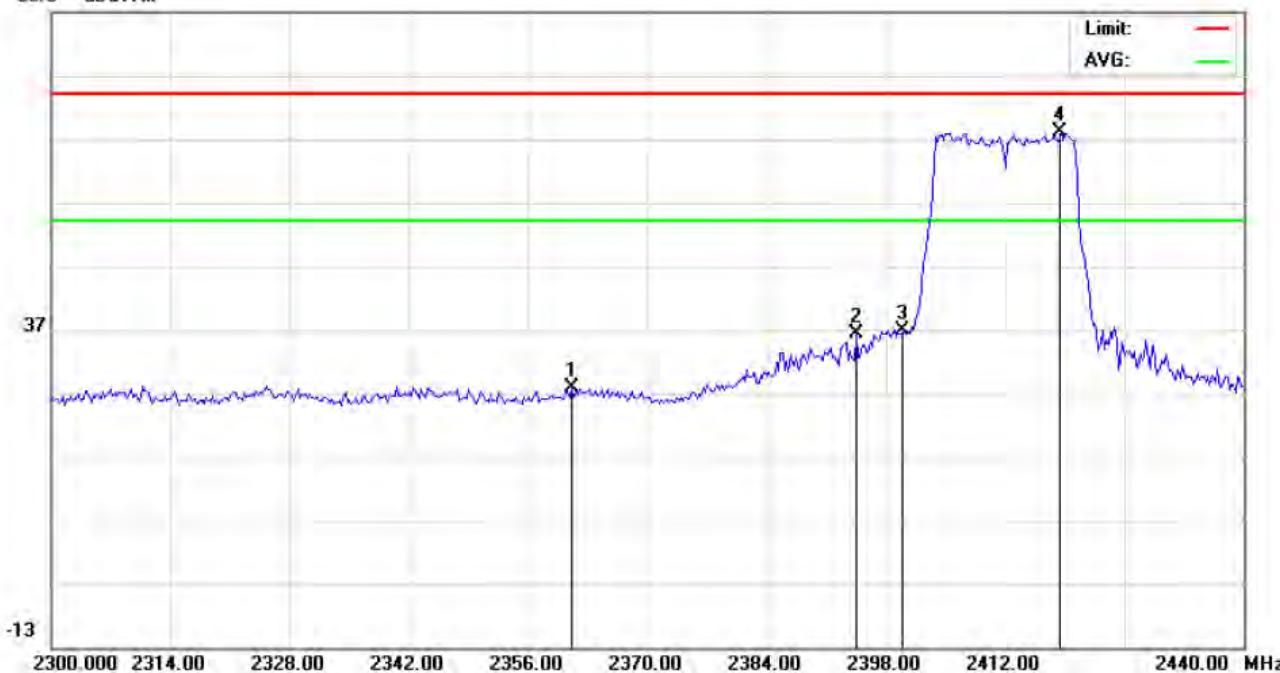

Site: site #1 Polarization: **Horizontal** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %
 EUT: GSM/WCDMA mobile phone/Smart phone Distance:
 M/N: QS-G3UCT1BK
 Mode: 802.11n(20)-CH1-rate6.5
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2361.133	36.31	-8.56	27.75	74.00	-46.25	peak			
2		2394.500	44.59	-8.42	36.17	74.00	-37.83	peak			
3		2400.000	45.19	-8.40	36.79	74.00	-37.21	peak			
4	*	2418.533	76.34	-8.33	68.01	74.00	-5.99	peak			

86.9 dBuV/m

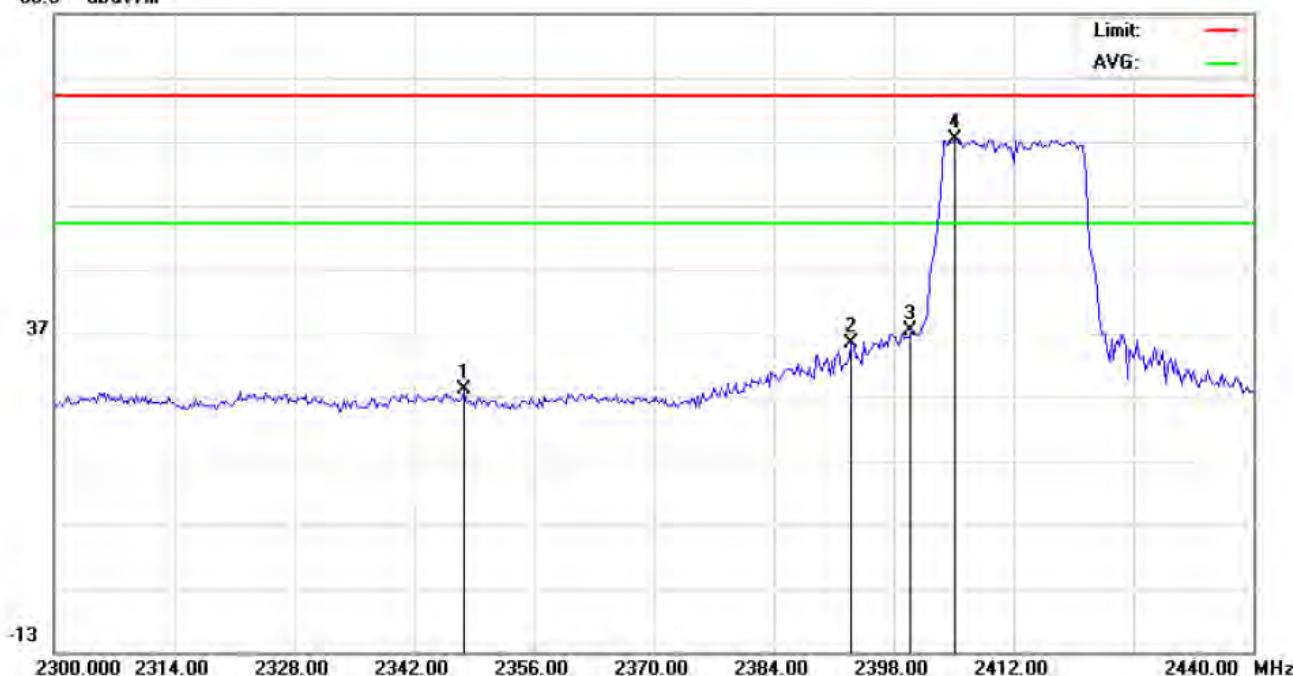

Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power: AC 120V/60Hz

Humidity: 60 %

EUT: GSM/WCDMA mobile phone/Smart phone

Distance:

M/N: QS-G3UCT1BK

Mode: 802.11n(20)-CH1-rate6.5

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2347.833	36.69	-8.61	28.08	74.00	-45.92	peak			
2		2393.100	43.63	-8.43	35.20	74.00	-38.80	peak			
3		2400.000	45.67	-8.40	37.27	74.00	-36.73	peak			
4	*	2405.233	75.74	-8.38	67.36	74.00	-6.64	peak			

86.9 dBuV/m



Site: site #1 Polarization: *Horizontal* Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %

EUT: GSM/WCDMA mobile phone/Smart phone Distance:

M/N: QS-G3UCT1BK

Mode: 802.11n(20)-CH11-rate6.5

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2462.000	70.77	-8.15	62.62	74.00	-11.38	peak			
2		2483.500	34.07	-8.07	26.00	74.00	-48.00	peak			
3		2533.333	35.83	-8.05	27.78	74.00	-46.22	peak			

86.9 dBuV/m



Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power: AC 120V/60Hz

Humidity: 60 %

EUT: GSM/WCDMA mobile phone/Smart phone

Distance:

M/N: QS-G3UCT1BK

Mode: 802.11n(20)-CH11-rate6.5

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2462.000	71.74	-8.15	63.59	74.00	-10.41	peak			
2		2483.500	34.10	-8.07	26.03	74.00	-47.97	peak			
3		2513.600	36.98	-8.02	28.96	74.00	-45.04	peak			

Note: the other modes radiation emission have enough 20dB margin.

Measurement= Reading + Factor, Over=Measure-Limit.

10. FCC LINE CONDUCTED EMISSION TEST


10.1 LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P. (dBuV)	Average (dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

**Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

10.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

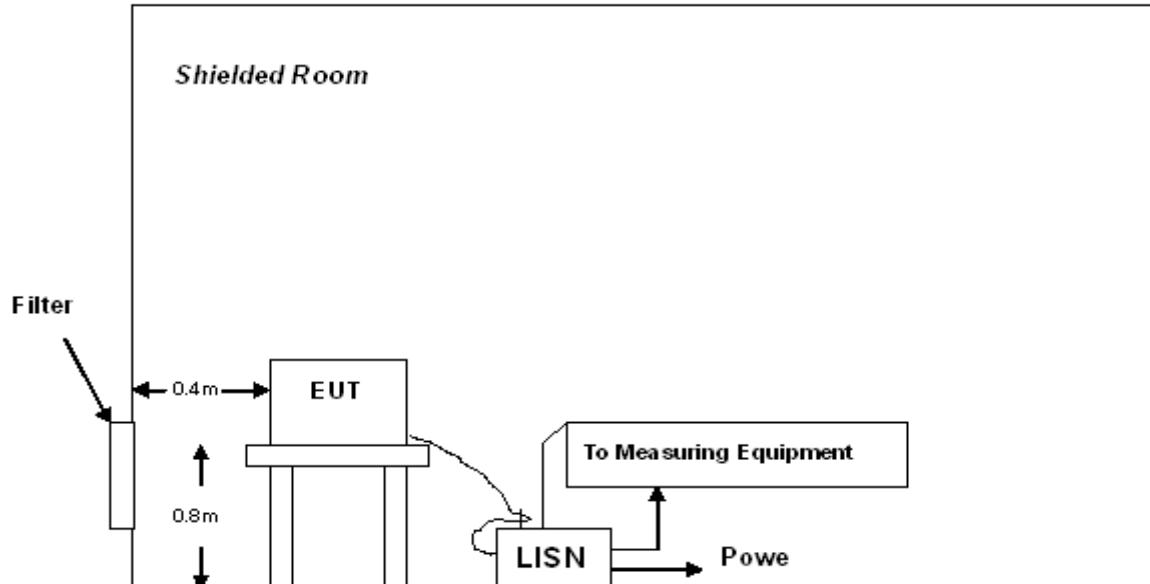

10.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST


- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) All support equipments received AC120V power from a LISN, if any.
- 5) The EUT received DC 5V power by adapter which received 120V/60Hz power from a LISN.
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) All test mode(s) were scanned during the preliminary test.

10.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3) The test data of the worst case condition(s) was reported on the Summary Data page.

10.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST


TEST RESULT OF L LINE

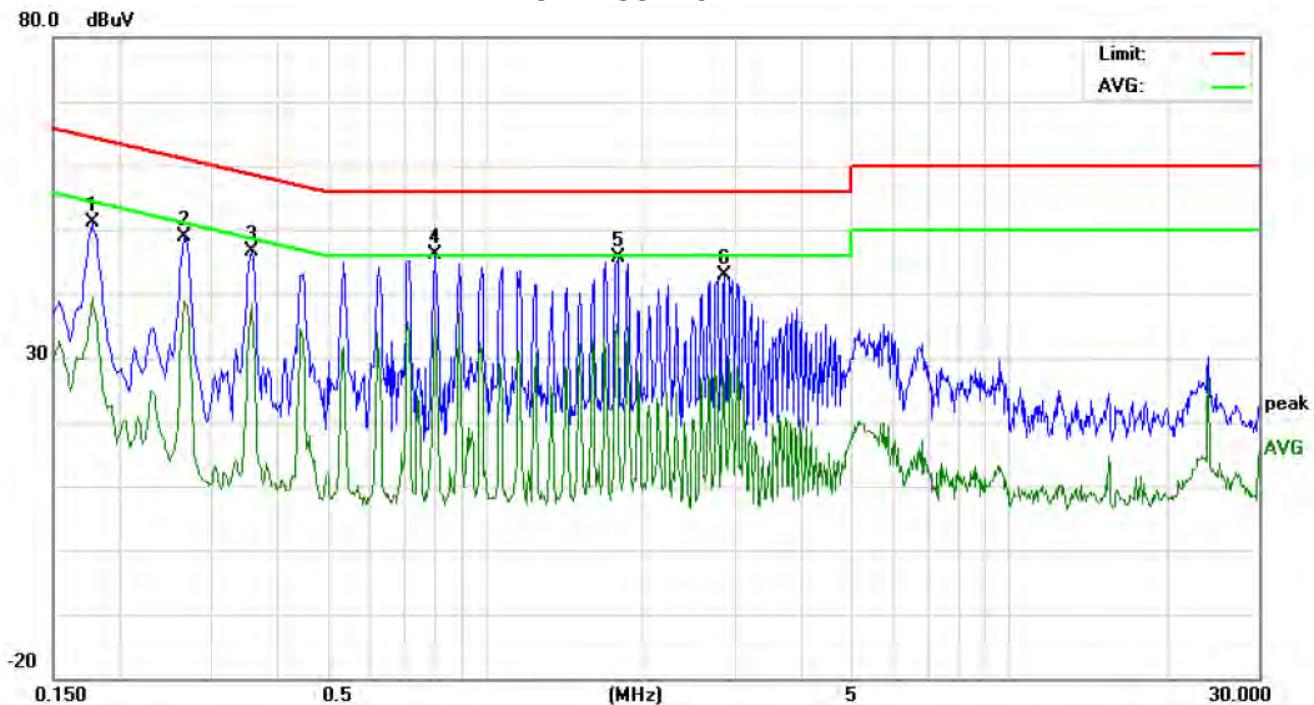

Site: Conduction Phase: **L1** Temperature: 26
 Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %
 EUT: GSM/WCDMA mobile phone/Smart phone(Fusion)
 M/N: QS-G3GUCT1BK
 Mode: Normal(WIFI)
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		dB	Peak	QP	AVG	QP	AVG	QP	AVG	
1	0.1779	40.81		29.20	10.19	51.00		39.39	64.58	54.58	-13.58	-15.19	P	
2	0.2660	38.63		28.70	10.28	48.91		38.98	61.24	51.24	-12.33	-12.26	P	
3	0.3578	36.29		28.02	10.31	46.60		38.33	58.78	48.78	-12.18	-10.45	P	
4	0.8020	35.75		26.59	10.28	46.03		36.87	56.00	46.00	-9.97	-9.13	P	
5	1.7940	35.31		21.90	10.29	45.60		32.19	56.00	46.00	-10.40	-13.81	P	
6	2.8699	32.43		14.66	10.52	42.95		25.18	56.00	46.00	-13.05	-20.82	P	

TEST RESULT OF N LINE

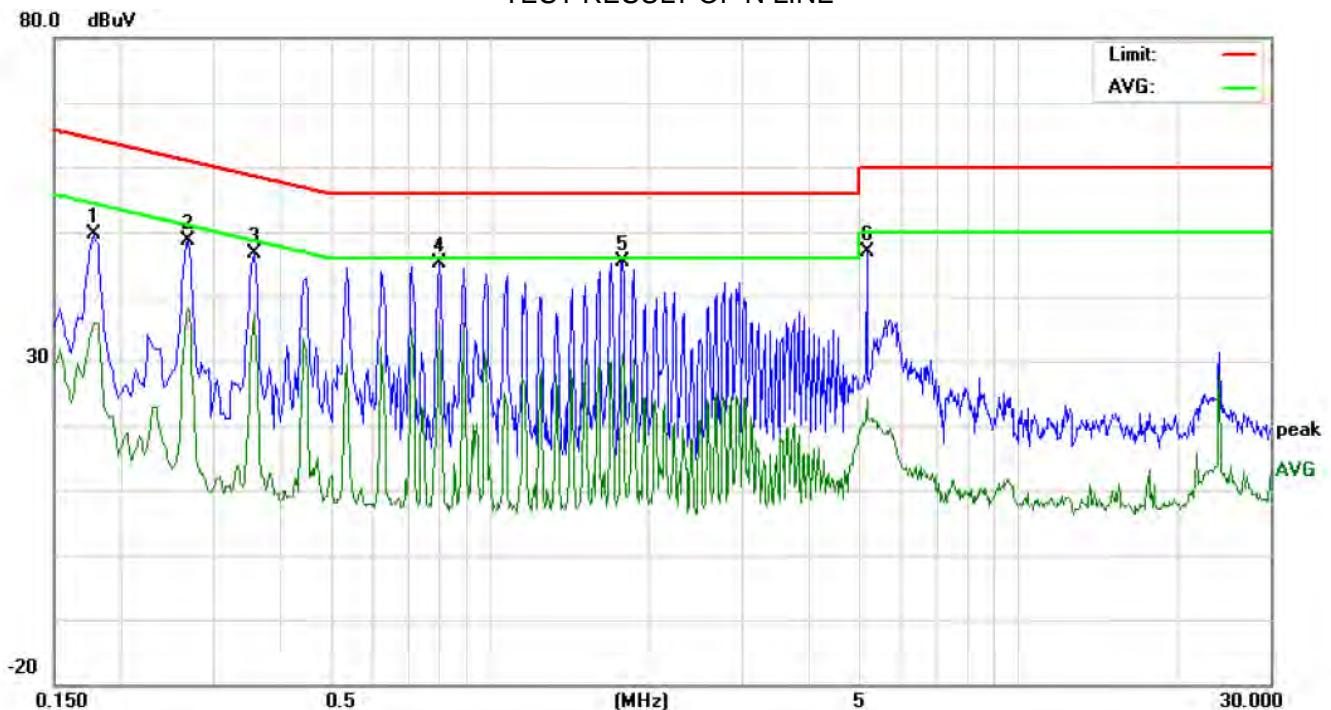

Site: Conduction Phase: **N** Temperature: 26
 Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %
 EUT: GSM/WCDMA mobile phone/Smart phone(Fusion)
 M/N: QS-G3GUCT1BK
 Mode: Normal(WIFI)
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1779	39.38		25.79	10.19	49.57		35.98	64.58	54.58	-15.01	-18.60	P	
2	0.2700	38.30		27.76	10.28	48.58		38.04	61.12	51.12	-12.54	-13.08	P	
3	0.3578	36.35		27.06	10.31	46.66		37.37	58.78	48.78	-12.12	-11.41	P	
4	0.8059	34.87		25.32	10.29	45.16		35.61	56.00	46.00	-10.84	-10.39	P	
5	1.7900	35.17		20.76	10.29	45.46		31.05	56.00	46.00	-10.54	-14.95	P	
6	5.1897	36.65		14.19	10.24	46.89		24.43	60.00	50.00	-13.11	-25.57	P	

APPENDIX I
PHOTOGRAPHS OF THE EUT
TOTAL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT




RIGHT VIEW OF EUT



OPEN VIEW OF EUT-1



INTERNAL VIEW OF EUT-1

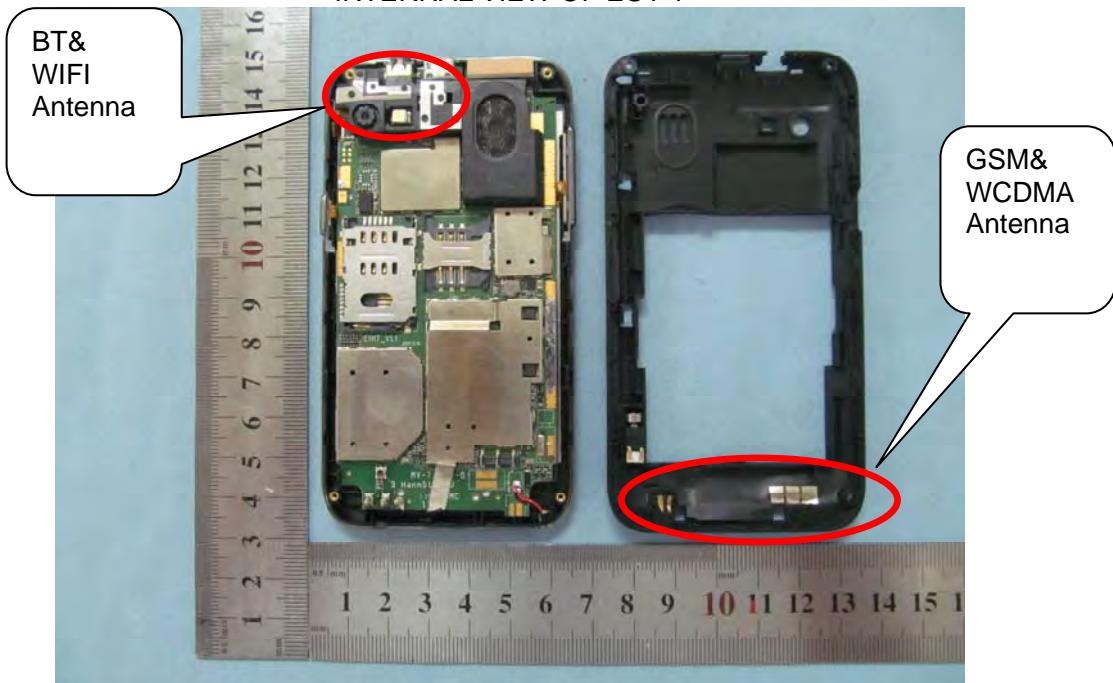

INTERNAL VIEW OF EUT-2




INTERNAL VIEW OF EUT-3




INTERNAL VIEW OF EUT-4



INTERNAL VIEW OF EUT-5

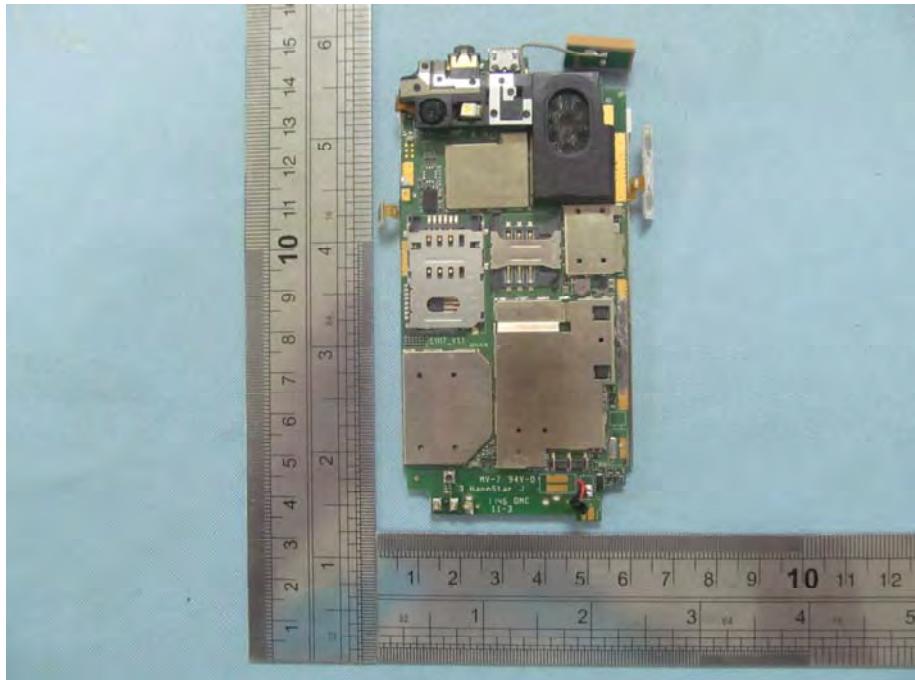

INTERNAL VIEW OF EUT-6

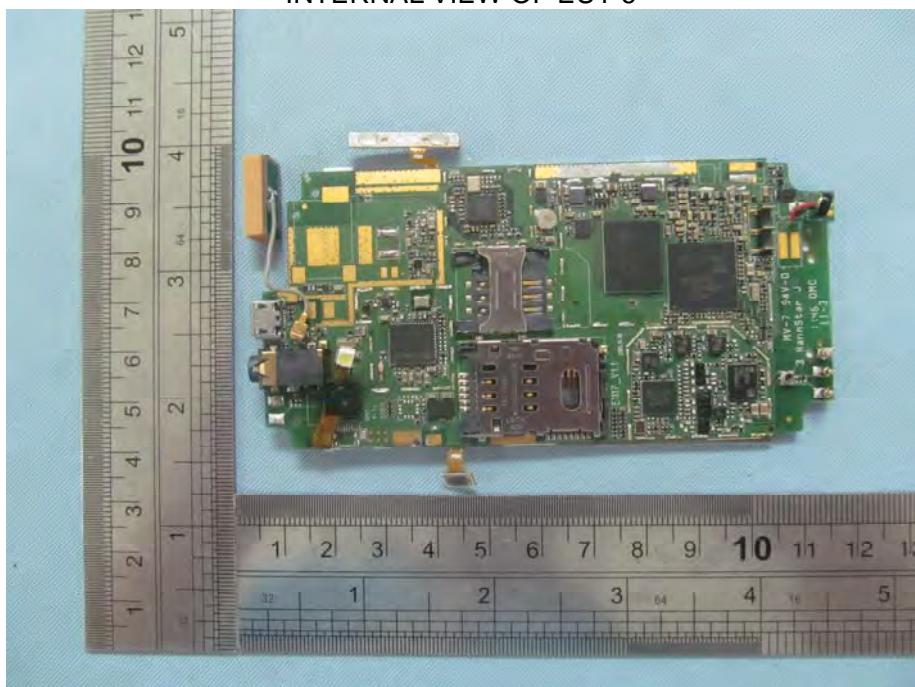


APPENDIX II
PHOTOGRAPHS OF THE TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

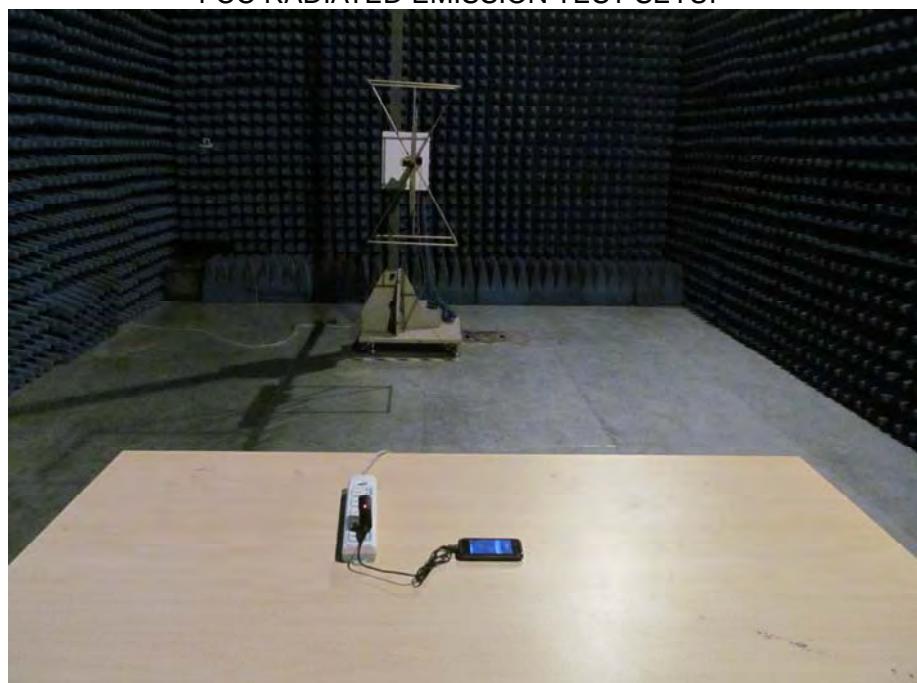

----END OF REPORT----