



# EMC

## TEST REPORT

REPORT NO. : F89031561  
MODEL NO. : M-S61  
DATE OF TEST : Mar. 16, 2000

PREPARED FOR: Logitech Far East Ltd.

ADDRESS: No. 2, Creation Rd. 4, Science-Based Ind. Park,  
Hsin Chu, Taiwan, R.O.C.

PREPARED BY: ADVANCE DATA TECHNOLOGY CORPORATION



Accredited Laboratory

No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien, Taiwan, R.O.C.

This test report consists of 15 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of our laboratory. It should not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. government. The test result in the report only applies to the tested sample.



**TABLE OF CONTENTS**

1. CERTIFICATION ..... 3

2. GENERAL INFORMATION ..... 4

    2.1 GENERAL DESCRIPTION OF EUT ..... 4

    2.2 DESCRIPTION OF SUPPORT UNITS ..... 5

    2.3 TEST METHODOLOGY AND CONFIGURATION ..... 5

3. TEST INSTRUMENTS ..... 6

    3.1 TEST INSTRUMENTS (EMISSION) ..... 6

    3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION ..... 7

4. TEST RESULTS (EMISSION) ..... 8

    4.1 RADIO DISTURBANCE ..... 8

    4.2 EUT OPERATION CONDITION ..... 8

    4.3 TEST DATA OF CONDUCTED EMISSION ..... 9

    4.4 TEST DATA OF RADIATED EMISSION ..... 11

5. PHOTOGRAPHS OF THE TEST CONFIGURATION WITH MINIMUM MARGIN ..... 13

6. APPENDIX - INFORMATION OF THE TESTING LABORATORY ..... 15



# 1. CERTIFICATION

Issue Date: Mar. 21, 2000

Reference No. 89031561

Product : Mouse  
 Trade Name : Logitech  
 Model No. : M-S61, M-SAT61, M-S62, M-SAT62  
 Applicant : Logitech Far East Ltd.  
 Standard : FCC Part 15, Subpart B, Class B  
 ANSI C63.4-1992  
 CISPR 22:1993+A1: 1995+A2: 1996, Class B

We hereby certify that one sample of the designation has been tested in our facility on Mar. 16, 2000. The test record, data evaluation and Equipment Under Test (EUT) configurations represent herein are true and accurate representation of the measurements of the sample's EMC characteristics under the conditions herein specified.

The test results show that the EUT as described in this report is in compliance with the Class B limits of conducted and radiated emission of applicable standards

TESTED BY: Dragon Liu, DATE: Mar. 21, 2000  
 ( Dragon Liu )

CHECKED BY: Rita Yi, DATE: Mar. 21, 2000  
 ( Rita Yi )

APPROVED BY: Fred Chen, DATE: Mar. 21, 2000  
 ( Fred Chen )

**ADVANCE DATA TECHNOLOGY CORPORATION**

**NVLAQ<sup>®</sup>**

Accredited Laboratory



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Product : Mouse  
 Model No. : M-S61  
 Power Supply Type : DC 5V (From PC)  
 Power Cord : N/A  
 Data Cable : Signal Cable, 1.8m

Note: The EUT is a mouse device with PS2 interface. It has four model names which are identical to each other in all aspects except for their outer appearance:

Model Name	Brand Name	Form of function button
M-S61	Logitech	Oval
M-SAT61		
M-S62	Logitech	Rectangular
M-SAT62		

From the above models, model: M-S61 was selected as representative model for the test and its data was recorded in this report.

For more detailed features description, please refer to user's manual.




## 2.2 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as a component installed into a system and tested together with necessary accessories or support units. The following support units or accessories are used to form representative test configuration during the tests.

No.	Product	Brand	Model No.	FCC ID	I/O Cable
1.	PERSONAL COMPUTER	IBM	2187-12W	FCC DoC	Nonshielded Power (1.8m)
2.	COLOR MONITOR	ADI	937G	BR8937G	Shielded Signal (1.2m) Nonshielded Power (1.8m)
3.	KEYBOARD	FORWARD	FDA-104GA	F4ZDA-104G	Shielded Signal (1.4m)
4.	PRINTER	HP	C2642A	B94C2642X	Shielded Signal (1.2m) Nonshielded Power (2.1m)
5.	MODEM	ACEEX	1414	IFAXDM1414	Shielded Signal (1.5m) Nonshielded Power (1.8m)

## 2.3 TEST METHODOLOGY AND CONFIGURATION

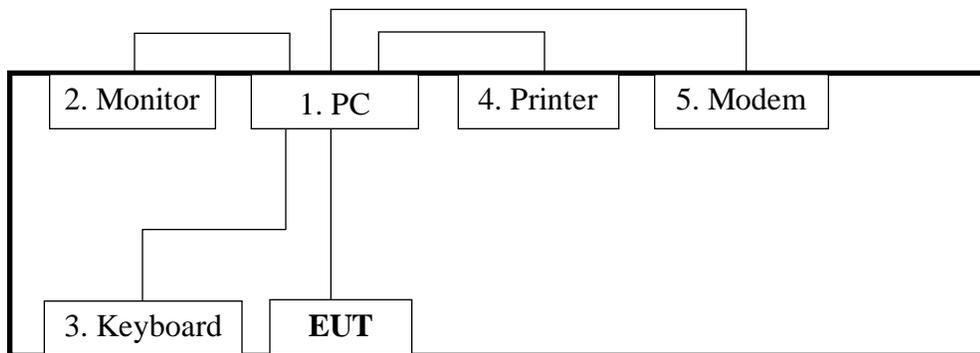

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 1992. Radiated testing was performed at an antenna to EUT distance of 10 m on an open area test site. Please refer to the photos of test configuration in Item 5.



### 3. TEST INSTRUMENTS

#### 3.1 TEST INSTRUMENTS (EMISSION)

##### CONDUCTED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ Test Receiver	ESCS 30	847124/029	Oct. 6, 2000
ROHDE & SCHWARZ LISN	ESHS-Z5	848773/004	Oct. 8, 2000
KYORITSU LISN	KNW-407	8/1395/12	Aug. 02, 2000
Shielded Room	Con A	ADT-CA	N/A

Note: 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per NAMAS document NIS81.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

##### RADIATED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
HP Spectrum Analyzer	8590L	3467U00646	Aug. 11, 2000
ADVANTEST Spectrum Analyzer	R3271A	85060311	May. 14, 2000
CHASE RF Pre_Amplifier	CPA9232	1010	Feb. 15, 2001
HP Pre_Amplifier	8449B	3008A01281	June 22, 2000
ROHDE & SCHWARZ Test Receiver	ESVS 10	84923/019	Jan. 12, 2001
CHASE Broadband Antenna	CBL6112B	2467	July 26, 2000
Schwarzbeck Horn_Antenna	BBHA9120-D1	D123	July 21, 2000
ROHDE & SCHWARZ Precision Dipole	HZ-12 (30~300MHz)	846932/0003	June 06, 2000
ROHDE & SCHWARZ Precision Dipole	HZ-13 (300~1000MHz)	846556/0007	June 17, 2000
CHANCE MOST Antenna Tower	AT-100	CM-A007	N/A
CHANCE MOST Turn Table	TC-008	CM-T007	N/A
CORCOM AC Filter	MRI2030	024/019	N/A
Open Field Test Site	Site B	ADT-RB	Oct. 03, 2000

Note: 1. The measurement uncertainty is less than +/- 3dB, which is calculated as per NAMAS document NIS81.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



## 3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION

### LIMIT OF RADIATED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (at 10m) *	Class B (at 10m) *
	dBuV/m	dBuV/m
30 - 230	40	30
230 - 1000	47	37

\* Detector Function: Quasi-Peak

### LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	Peak	Average	Peak	Average
Above 1000	80.0	60.0	74.0	54.0

- Note: (1) The lower limit shall apply at the transition frequencies.  
 (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 (3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### LIMIT OF CONDUCTED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- Note: (1) The lower limit shall apply at the transition frequencies.  
 (2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz  
 (3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.





### 4.3 TEST DATA OF CONDUCTED EMISSION

EUT: MouseMODEL: M-S616 dB Bandwidth: 9 kHzPHASE: LINE (L)

Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
		[dB (uV)]		[dB (Uv)]		[dB (uV)]		(dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.200	0.1	53.8	-	53.9	-	64.6	54.6	-10.7	-
0.302	0.1	42.8	-	42.9	-	61.6	51.6	-18.7	-
0.501	0.1	42.1	-	42.2	-	56.0	46.0	-13.8	-
0.603	0.1	40.5	-	40.6	-	56.0	46.0	-15.4	-
12.968	0.4	10.2	-	10.6	-	60.0	50.0	-49.4	-
22.218	0.6	11.6	-	12.2	-	60.0	50.0	-47.8	-

- Remarks:
1. "\*": Undetectable
  2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  4. The emission level of other frequencies were very low against the limit.
  5. Emission Level = Corr. Factor + Reading Value
  6. Margin value = Emission level - Limit value.



### 4.3 TEST DATA OF CONDUCTED EMISSION

EUT: MouseMODEL: M-S616 dB Bandwidth: 9 kHzPHASE: NEUTRAL (N)

Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
		[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.200	0.1	54.2	-	54.3	-	64.6	54.6	-10.3	-
0.302	0.1	47.1	-	47.2	-	61.6	51.6	-14.4	-
0.501	0.1	40.8	-	40.9	-	56.0	46.0	-15.1	-
0.603	0.1	40.1	-	40.2	-	56.0	46.0	-15.8	-
12.968	0.7	26.4	-	27.1	-	60.0	50.0	-32.9	-
22.218	0.9	20.4	-	21.3	-	60.0	50.0	-38.7	-

- Remarks:
1. "\*": Undetectable
  2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  4. The emission level of other frequencies were very low against the limit.
  5. Emission Level = Corr. Factor + Reading Value
  6. Margin value = Emission level - Limit value.



#### 4.4 TEST DATA OF RADIATED EMISSION

EUT: Mouse

MODEL: M-S61

ANT. POLARITY: Horizontal

DETECTOR FUNCTION: Quasi-peak

6 dB BANDWIDTH: 120 kHz

Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle
48.2	9.5	4.0	13.5	30.0	-16.5	394	209
167.1	11.6	5.1	16.7	30.0	-13.3	400	244
529.9	23.2	1.5	24.7	37.0	-12.3	331	70
553.0	24.0	0.4	24.4	37.0	-12.6	256	172
745.2	25.5	2.5	28.0	37.0	-9.0	227	266
746.3	25.5	2.8	28.3	37.0	-8.7	221	272
845.9	26.7	2.1	28.8	37.0	-8.2	188	316
936.1	27.4	2.3	29.7	37.0	-7.3	148	356
975.0	27.7	1.8	29.5	37.0	-7.5	100	349

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB)  
+ Reading Value (dBuV).
  2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level - Limit value



#### 4.4 TEST DATA OF RADIATED EMISSION

EUT: Mouse

MODEL: M-S61

ANT. POLARITY: Vertical

DETECTOR FUNCTION: Quasi-peak

6 dB BANDWIDTH: 120 kHz

Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle
43.4	11.6	12.8	24.4	30.0	-5.6	100	341
168.2	11.5	4.5	16.0	30.0	-14.0	100	349
201.9	11.1	4.1	15.2	30.0	-14.8	103	328
432.5	20.2	2.6	22.8	37.0	-14.2	103	310
816.0	26.1	3.1	29.2	37.0	-7.8	246	340
900.8	27.2	1.2	28.4	37.0	-8.6	353	327
930.9	27.4	1.5	28.9	37.0	-8.1	374	306
957.4	27.5	1.7	29.2	37.0	-7.8	400	347

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB)  
+ Reading Value (dBuV).
  2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level - Limit value




## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION WITH MINIMUM MARGIN

### CONDUCTED EMISSION TEST





### RADIATED EMISSION TEST

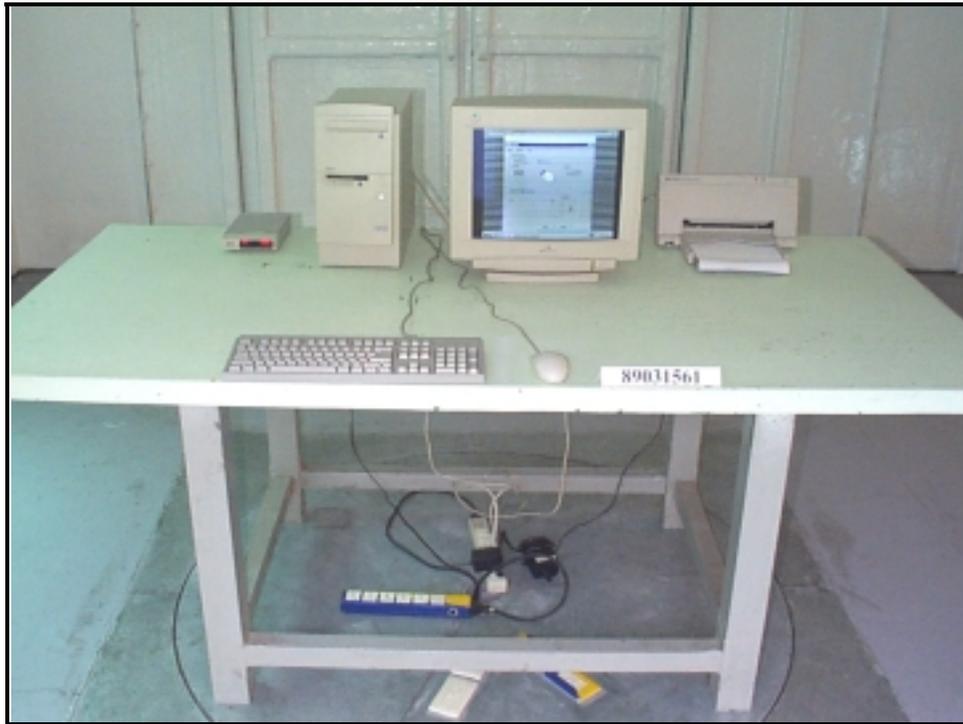



## 6. APPENDIX - INFORMATION OF THE TESTING LABORATORY

### Information of the testing laboratory

We, ADT Corp., are founded in 1988, to provide our best service in EMC and Safety consultation. Our laboratory is accredited by the following approval agencies according to ISO/IEC Guide 25 or EN 45001:

- |               |                                      |
|---------------|--------------------------------------|
| ● USA         | FCC, UL, NVLAP                       |
| ● Germany     | TUV Rheinland<br>TUV Product Service |
| ● Japan       | VCCI                                 |
| ● New Zealand | RFS                                  |
| ● Norway      | NEMKO, DNV                           |
| ● U.K.        | INCHCAPE                             |
| ● R.O.C.      | BSMI                                 |

Enclosed please find some certificates of our laboratory obtained from approval agencies. If you have any comments, please feel free to contact us with the following:

**Lin Kou EMC Lab.:**  
Tel: 886-2-26032180  
Fax: 886-2-26022943

**Hsin Chu EMC Lab:**  
Tel: 886-3-5935343  
Fax: 886-3-5935342

**Lin Kou Safety Lab.:**  
Tel: 886-2-26093195  
Fax: 886-2-26093184

**Design Center:**  
Tel: 886-2-26093195  
Fax: 886-2-26093184

E-mail: [service@mail.adt.com.tw](mailto:service@mail.adt.com.tw)  
<http://www.adt.com.tw>