



FCC RADIO TEST REPORT

FCC ID : JNZA00202
Equipment : Wireless Headset
Brand Name : Logitech, logitech G, logi, G
Model Name : A00202
Applicant : Logitech Far East Ltd
#2 Creation Rd., 4, Science-Based Ind.
Park, HsinChu , Taiwan
Manufacturer : Logitech Europe S.A
EPFL - Quartier de l' Innovation, Daniel Borel
Innovation Center, 1015 Lausanne, Switzerland.
Standard : FCC Part 15 Subpart C §15.247

The product was received on Feb. 13, 2025 and testing was performed from Mar. 24, 2025 to Apr. 10, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements	21
4 List of Measuring Equipment	22
5 Measurement Uncertainty	23
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Danny Lee

Report Producer: Michelle Chen



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs Bluetooth and SRD 2.4GHz	
Antenna Type SRD 2.4GHz: <Ant. 0>: Monopole Antenna <Ant. 1>: Monopole Antenna	

Antenna information		
2403.35 MHz ~ 2477.35 MHz	Peak Gain (dBi)	<Ant. 0>: -2.03 <Ant. 1>: -0.67

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH22-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786



1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2403.35	21	2445.35
	1	2405.35	22	2447.35
	2	2407.35	23	2449.35
	3	2409.35	24	2451.35
	4	2411.35	25	2453.35
	5	2413.35	26	2455.35
	6	2415.35	27	2457.35
	7	2417.35	28	2459.35
	8	2419.35	29	2461.35
	9	2421.35	30	2463.35
	10	2423.35	31	2465.35
	11	2425.35	32	2467.35
	12	2427.35	33	2469.35
	13	2429.35	34	2471.35
	14	2431.35	35	2473.35
	15	2433.35	36	2475.35
	16	2435.35	37	2477.35
	17	2437.35	-	-
	18	2439.35	-	-
	19	2441.35	-	-
20	2443.35	-	-	




2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	SRD 2.4GHz / pi/4-DQPSK
	Mode 1: SRD 2.4GHz Tx CH00_2403.35 MHz_3Mbps
	Mode 2: SRD 2.4GHz Tx CH19_2441.35 MHz_3Mbps
	Mode 3: SRD 2.4GHz Tx CH37_2477.35 MHz_3Mbps
AC Conducted Emission	Mode 1 :Bluetooth TX + 3.5mm Audio Port connect to Notebook + Microphone + USB Cable (Charging from Notebook)
	Mode 2 :SRD 2.4GHz TX + 3.5mm Audio Port connect to Notebook + Microphone + USB Cable (Charging from Notebook)
	Mode 3 :Bluetooth-LE TX + 3.5mm Audio Port connect to Notebook + Microphone + USB Cable (Charging from Notebook)
Remark:	
1. The worst case of Conducted Emission is mode 1; only the test data of it was reported.	
2. The detailed radiated test modes are shown in Appendix C.	
3. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

2.3 Connection Diagram of Test System

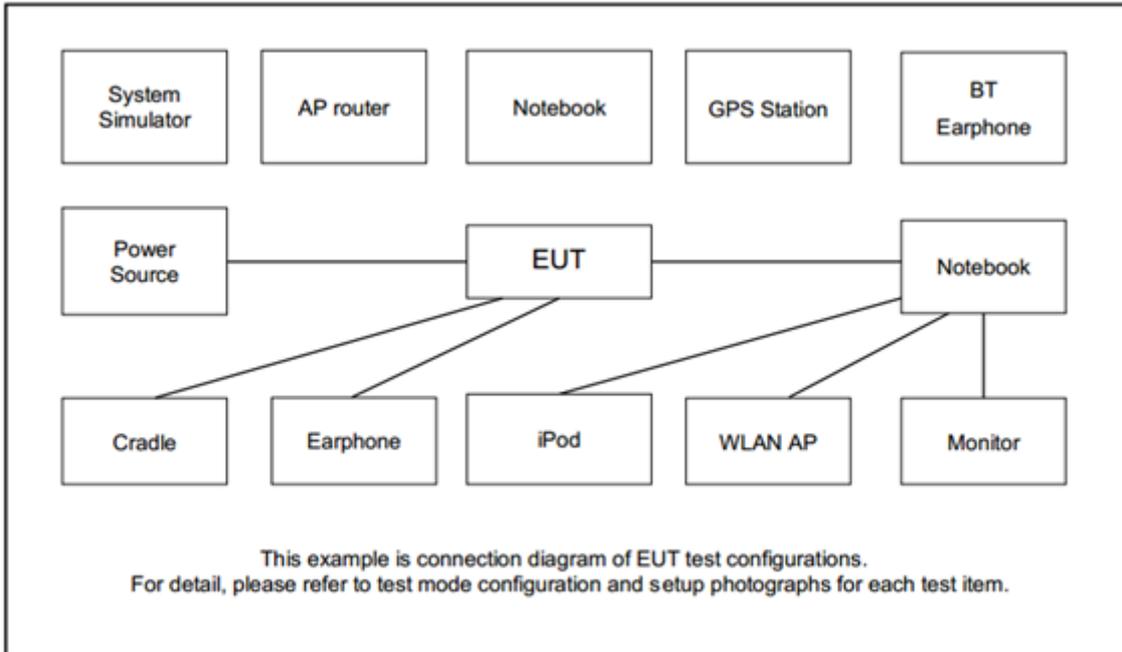

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A
2.	WLAN AP	ASUS	RT-AC52	MSQ-RTAC4A00	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Notebook	DELL	P129G001	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.5 EUT Operation Test Setup

The RF test items, utility “AvServe_R106 v2.106.9999.9999” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

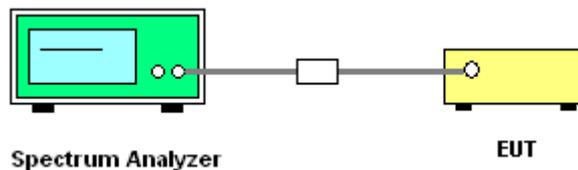

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.3 PKPM1.
2. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
3. The RF output of EUT is connected to the power meter by RF cable and attenuator.
4. The path loss is compensated to the results for each measurement.
5. Set the maximum power setting and enable the EUT to transmit continuously.
6. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

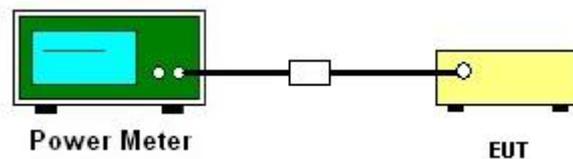

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

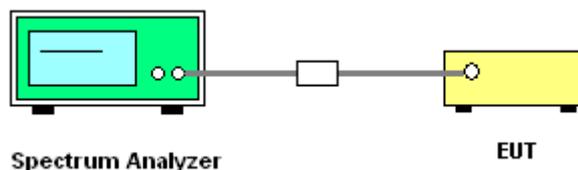

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

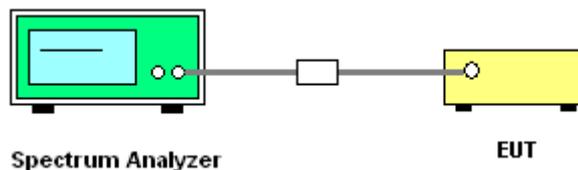

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

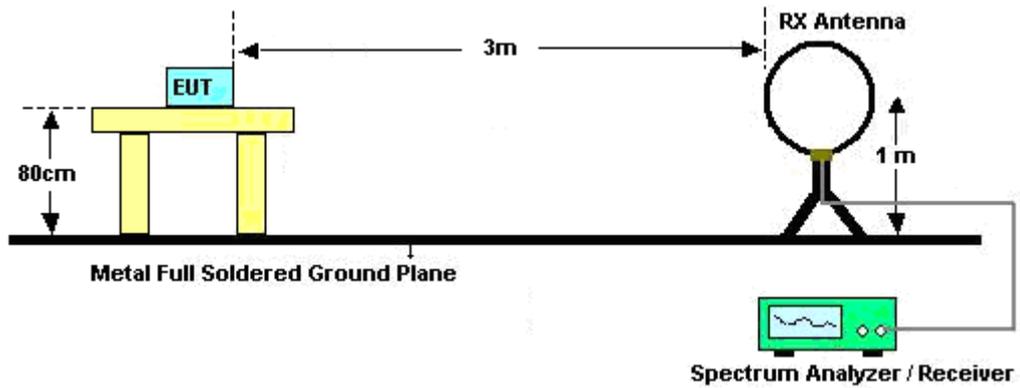


For radiated test from 30MHz to 1GHz

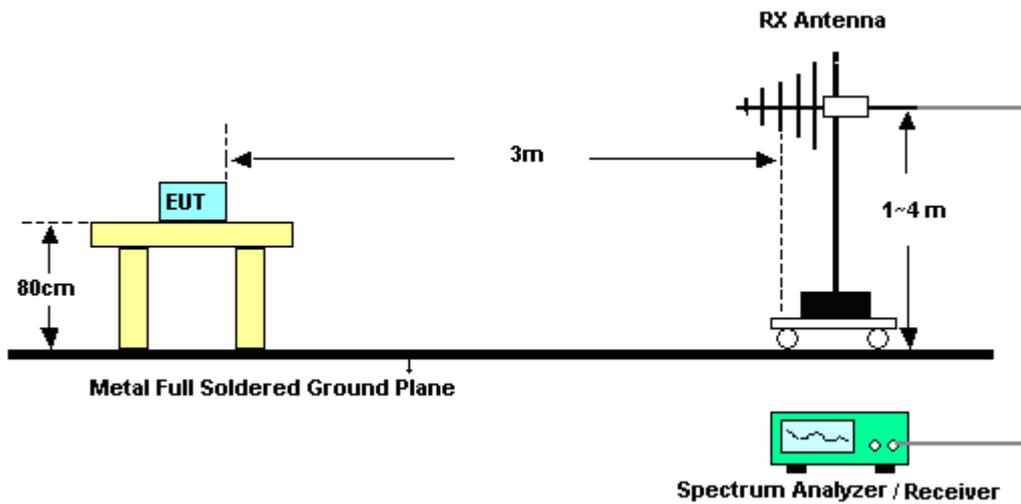

For radiated test from 1GHz to 18GHz

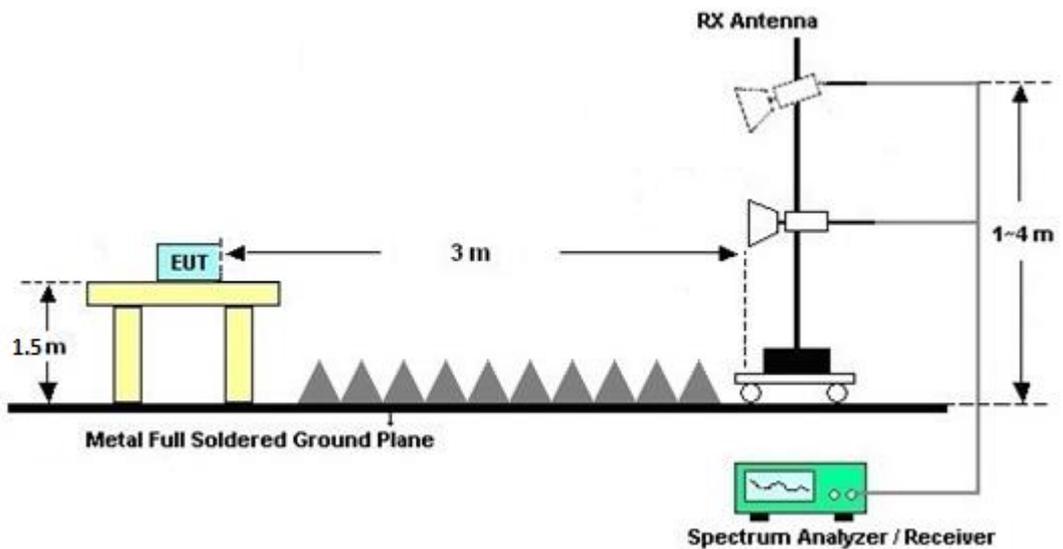

For radiated test above 18GHz

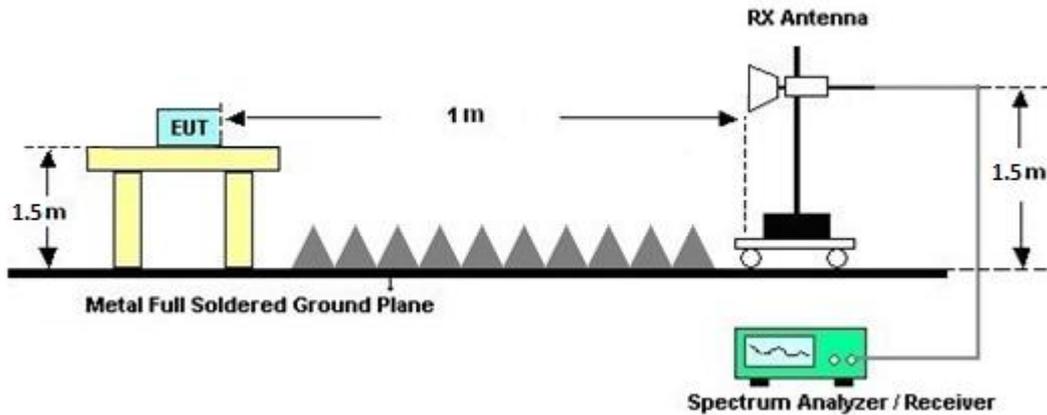

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

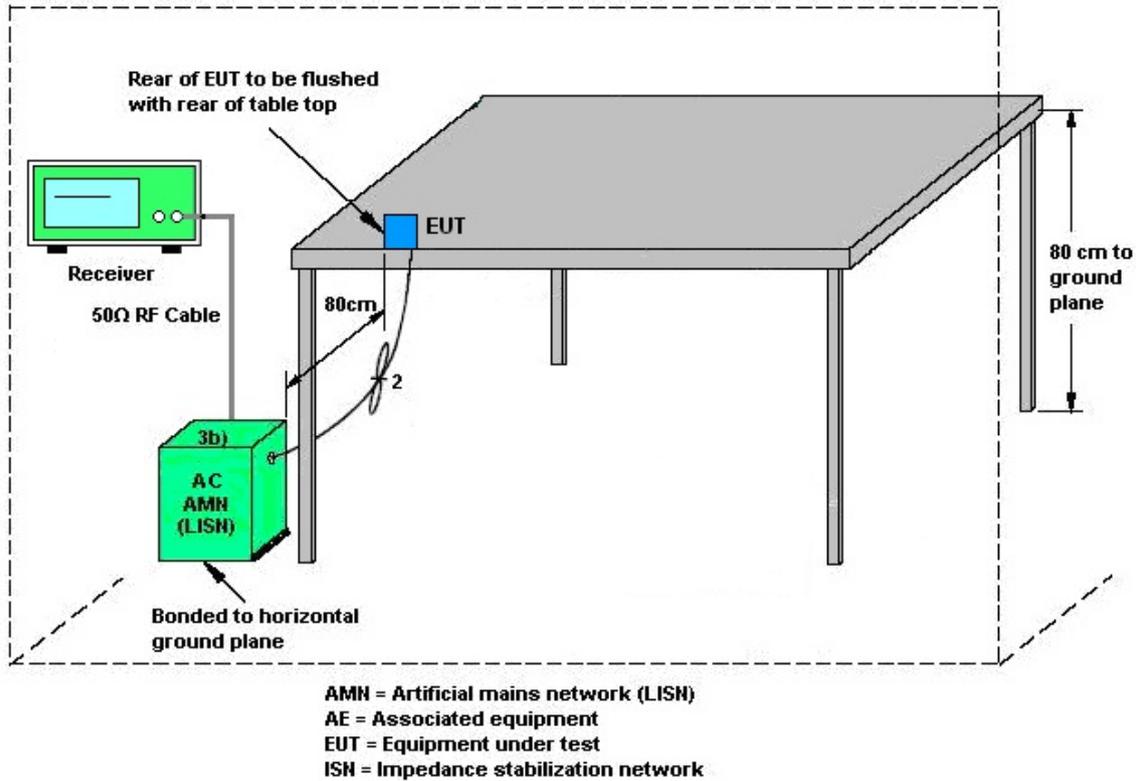

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9kHz~30MHz	Aug. 29, 2024	Apr. 01, 2025~ Apr. 09, 2025	Aug. 28, 2025	Radiation (03CH22-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63304 & 002	30MHz~1GHz	Dec. 17, 2024	Apr. 01, 2025~ Apr. 09, 2025	Dec. 16, 2025	Radiation (03CH22-HY)
Amplifier	SONOMA	310N	421581	N/A	Jul. 11, 2024	Apr. 01, 2025~ Apr. 09, 2025	Jul. 10, 2025	Radiation (03CH22-HY)
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02038	1GHz~18GHz	Jul. 29, 2024	Apr. 01, 2025~ Apr. 09, 2025	Jul. 28, 2025	Radiation (03CH22-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1230	18GHz~40GHz	Oct. 25, 2024	Apr. 01, 2025~ Apr. 09, 2025	Oct. 24, 2025	Radiation (03CH22-HY)
Amplifier	EMEC	EM01G18GA	060877	N/A	Sep. 27, 2024	Apr. 01, 2025~ Apr. 09, 2025	Sep. 26, 2025	Radiation (03CH22-HY)
Preamplifier	EMEC	EM18G40G	060873	18-40GHz	Sep. 02, 2024	Apr. 01, 2025~ Apr. 09, 2025	Sep. 01, 2025	Radiation (03CH22-HY)
Signal Analyzer	Keysight	N9010B	MY62170278	10Hz~44GHz	Sep. 24, 2024	Apr. 01, 2025~ Apr. 09, 2025	Sep. 23, 2025	Radiation (03CH22-HY)
Hygrometer	TECPEL	DTM-303A	TP201998	N/A	Oct. 24, 2024	Apr. 01, 2025~ Apr. 09, 2025	Oct. 23, 2025	Radiation (03CH22-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Apr. 01, 2025~ Apr. 09, 2025	N/A	Radiation (03CH22-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Apr. 01, 2025~ Apr. 09, 2025	N/A	Radiation (03CH22-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Apr. 01, 2025~ Apr. 09, 2025	N/A	Radiation (03CH22-HY)
Software	Audix	E3 6.09824_2019122	RK-002347	N/A	N/A	Apr. 01, 2025~ Apr. 09, 2025	N/A	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 05, 2025	Apr. 01, 2025~ Apr. 09, 2025	Mar. 04, 2026	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804390/2,804611/2,804615/2	N/A	Oct. 23, 2024	Apr. 01, 2025~ Apr. 09, 2025	Oct. 22, 2025	Radiation (03CH22-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Apr. 01, 2025~ Apr. 10, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Apr. 01, 2025~ Apr. 10, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 23, 2024	Apr. 01, 2025~ Apr. 10, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 03, 2025	Apr. 01, 2025~ Apr. 10, 2025	Mar. 02, 2026	Conduction (CO07-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 12, 2024	Apr. 01, 2025~ Apr. 10, 2025	Dec. 11, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	9kHz~30MHz	Mar. 24, 2025	Apr. 01, 2025~ Apr. 10, 2025	Mar. 23, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Apr. 01, 2025~ Apr. 10, 2025	Sep. 22, 2025	Conduction (CO07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Mar. 24, 2025~ Apr. 10, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	1036004	N/A	Jul. 04, 2024	Mar. 24, 2025~ Apr. 10, 2025	Jul. 03, 2025	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Jul. 04, 2024	Mar. 24, 2025~ Apr. 10, 2025	Jul. 03, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2024	Mar. 24, 2025~ Apr. 10, 2025	Aug. 22, 2025	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Mar. 24, 2025~ Apr. 10, 2025	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_v ersion_240513	N/A	Conducted Other Test Item	N/A	Mar. 24, 2025~ Apr. 10, 2025	N/A	Conducted (TH05-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.7 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Junyu Zhou	Temperature:	21~25	°C
Test Date:	2025/3/24~2025/4/10	Relative Humidity:	51~54	%

<Ant. 0>

TEST RESULTS DATA 6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
SRD 2.4G	3Mbps	1	0	2403.35	1.934	1.601	0.50	Pass
SRD 2.4G	3Mbps	1	19	2441.35	1.910	1.674	0.50	Pass
SRD 2.4G	3Mbps	1	37	2477.35	1.907	1.617	0.50	Pass

TEST RESULTS DATA Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
SRD 2.4G	3Mbps	1	0	2403.35	1.92	30.00	-2.03	-0.11	36.00	Pass
SRD 2.4G	3Mbps	1	19	2441.35	1.85	30.00	-2.03	-0.18	36.00	Pass
SRD 2.4G	3Mbps	1	37	2477.35	0.80	30.00	-2.03	-1.23	36.00	Pass

TEST RESULTS DATA Average Power Table (Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
SRD 2.4G	3Mbps	1	0	2403.35	-0.13	30.00	-2.03	-2.16	36.00	Pass
SRD 2.4G	3Mbps	1	19	2441.35	-0.50	30.00	-2.03	-2.53	36.00	Pass
SRD 2.4G	3Mbps	1	37	2477.35	-1.50	30.00	-2.03	-3.53	36.00	Pass

TEST RESULTS DATA Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
SRD 2.4G	3Mbps	1	0	2403.35	-0.83	-14.35	-2.03	8.00	Pass
SRD 2.4G	3Mbps	1	19	2441.35	-2.78	-16.85	-2.03	8.00	Pass
SRD 2.4G	3Mbps	1	37	2477.35	-3.55	-17.86	-2.03	8.00	Pass

Note: PSD (dBm / 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

<Ant. 1>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
SRD 2.4G	3Mbps	1	0	2403.35	1.911	1.649	0.50	Pass
SRD 2.4G	3Mbps	1	19	2441.35	1.908	1.635	0.50	Pass
SRD 2.4G	3Mbps	1	37	2477.35	1.908	1.669	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
SRD 2.4G	3Mbps	1	0	2403.35	1.99	30.00	-0.67	1.32	36.00	Pass
SRD 2.4G	3Mbps	1	19	2441.35	1.82	30.00	-0.67	1.15	36.00	Pass
SRD 2.4G	3Mbps	1	37	2477.35	1.03	30.00	-0.67	0.36	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
SRD 2.4G	3Mbps	1	0	2403.35	-0.03	30.00	-0.67	-0.70	36.00	Pass
SRD 2.4G	3Mbps	1	19	2441.35	-0.36	30.00	-0.67	-1.03	36.00	Pass
SRD 2.4G	3Mbps	1	37	2477.35	-1.40	30.00	-0.67	-2.07	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
SRD 2.4G	3Mbps	1	0	2403.35	-2.02	-16.16	-0.67	8.00	Pass
SRD 2.4G	3Mbps	1	19	2441.35	-2.59	-16.60	-0.67	8.00	Pass
SRD 2.4G	3Mbps	1	37	2477.35	-2.93	-16.60	-0.67	8.00	Pass


Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.




<Ant. 0>

6dB Bandwidth


6 dB Bandwidth Plot on Channel 0

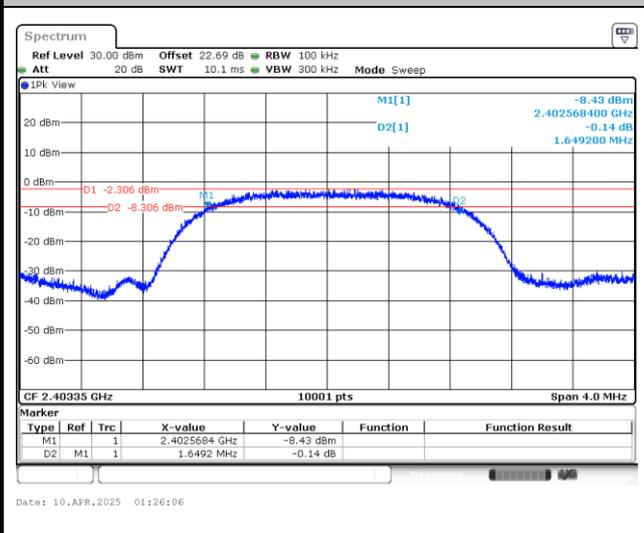

6 dB Bandwidth Plot on Channel 19

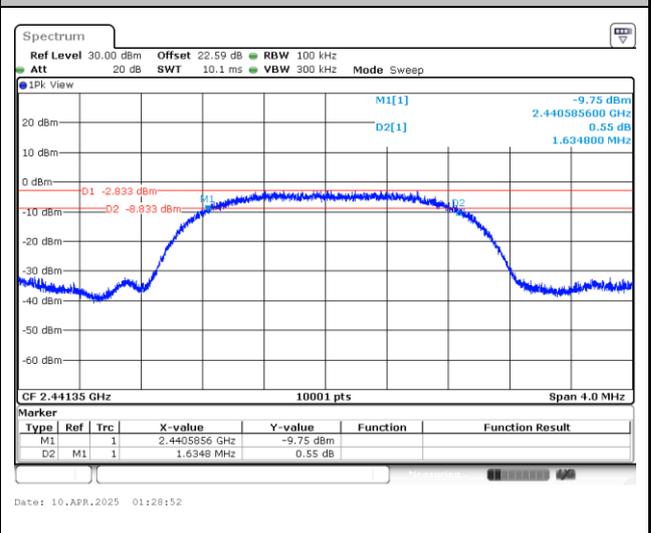


6 dB Bandwidth Plot on Channel 37

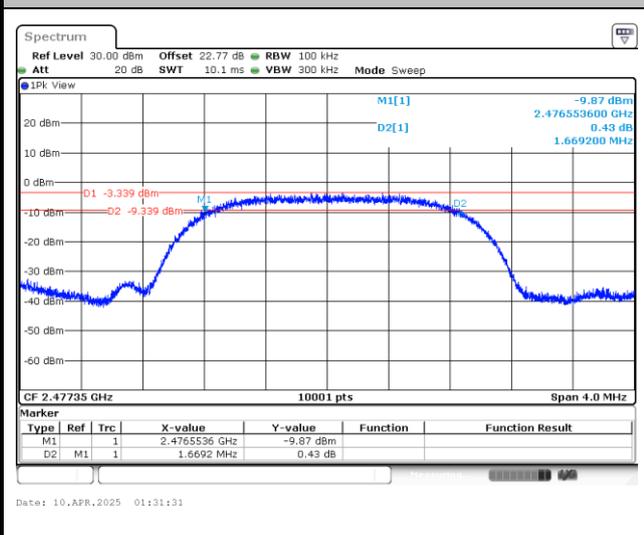




99% Occupied Bandwidth


99% Occupied Bandwidth Plot on Channel 0

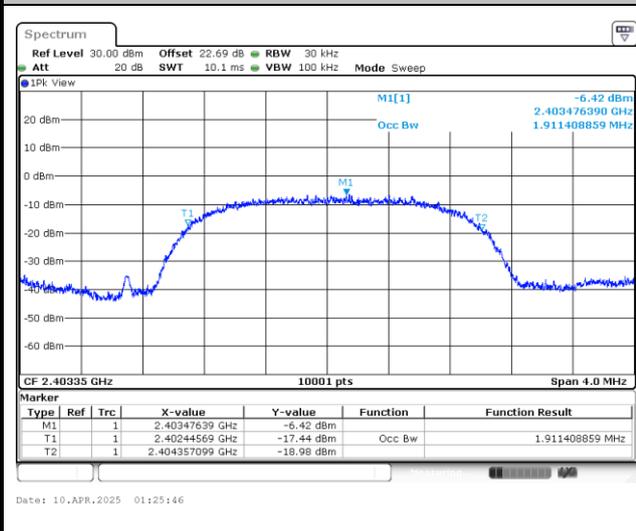

99% Occupied Bandwidth Plot on Channel 19

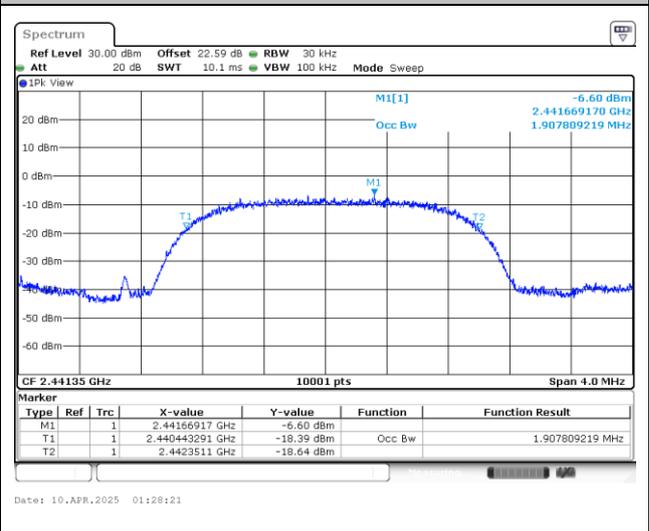


99% Occupied Bandwidth Plot on Channel 37

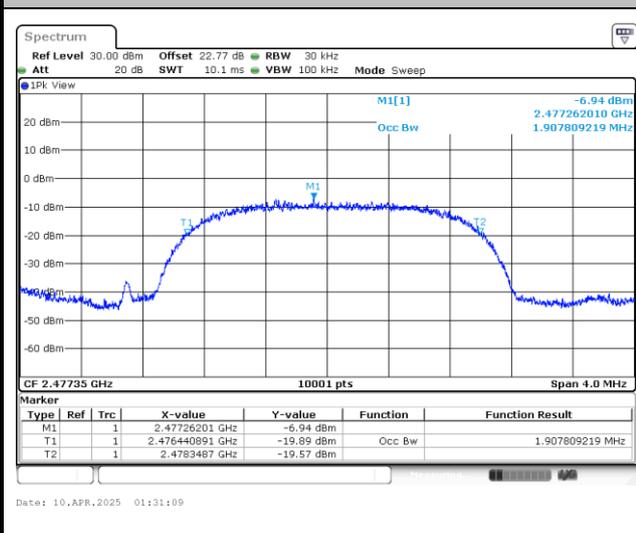




Power Spectral Density (dBm/3kHz)


Power Density (dBm/3kHz) Plot Channel 0

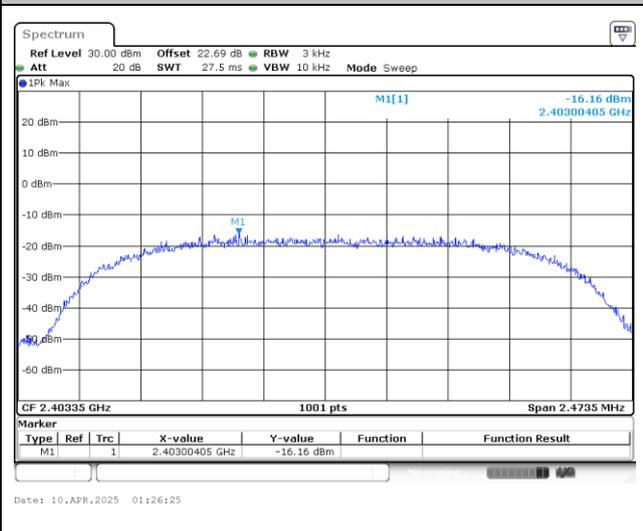

Power Density (dBm/3kHz) Plot Channel 19

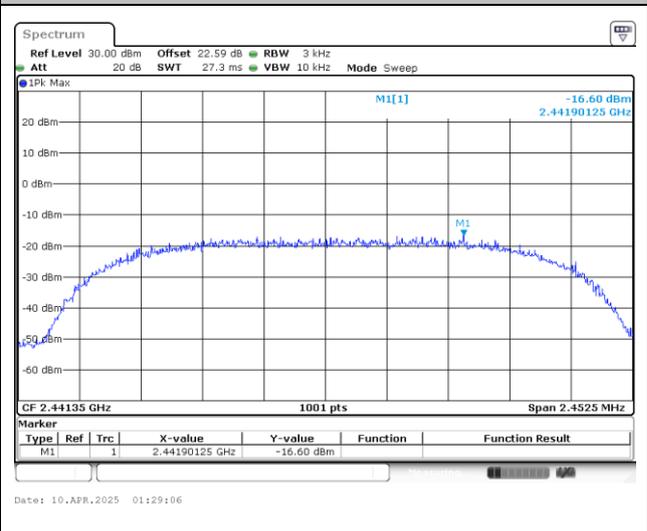

Power Density (dBm/3kHz) Plot Channel 37

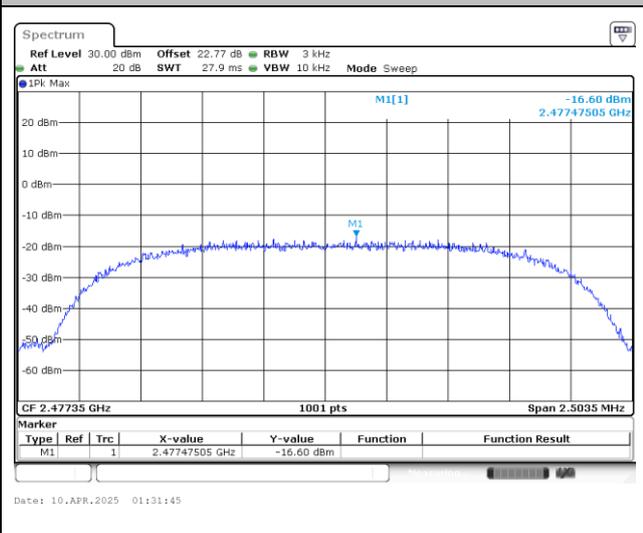





Band Edge and Conducted Spurious Emission

Channel 0


100kHz PSD reference Level Plot

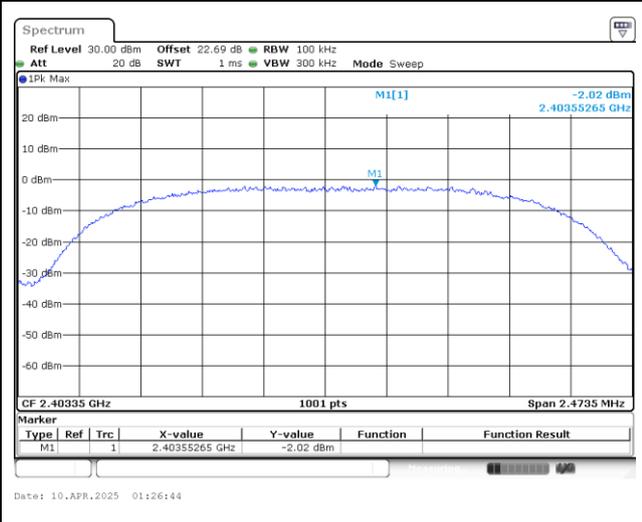


Plot on Channel 0

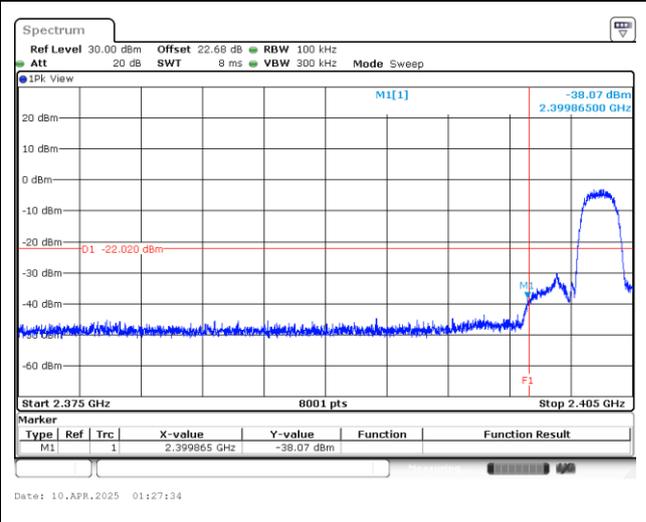

Spurious Emission 30MHz~1GHz Plot

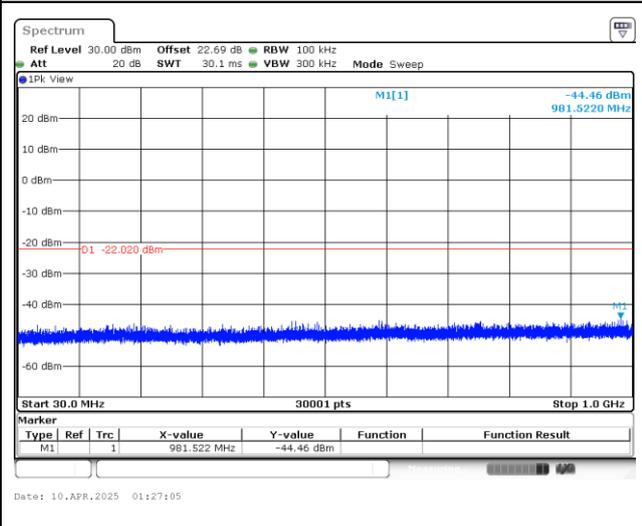


Spurious Emission 1GHz~26.5GHz Plot

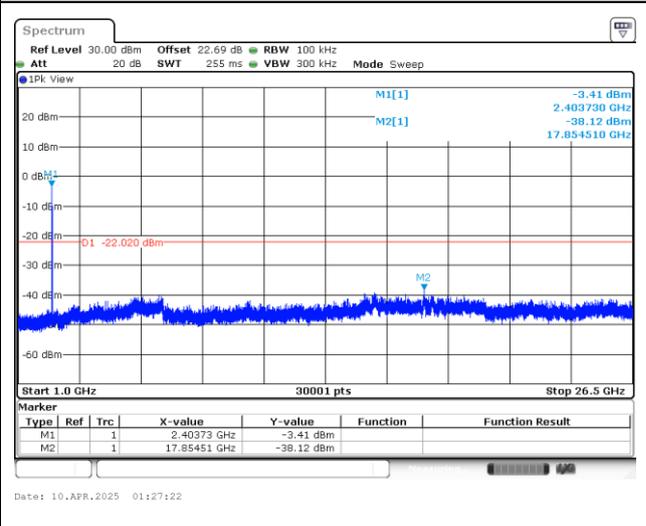




Channel 19

100kHz PSD reference Level Plot

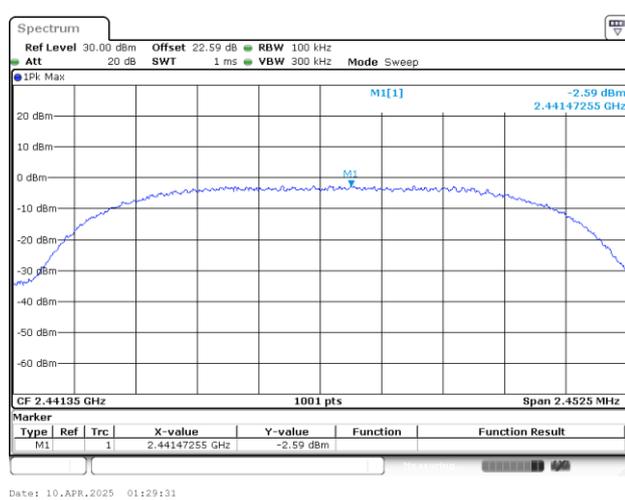


Plot on Channel 19

Spurious Emission 30MHz~1GHz Plot

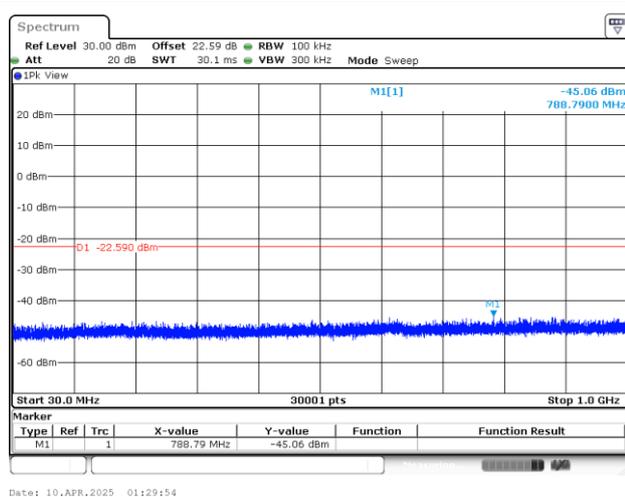


Spurious Emission 1GHz~26.5GHz Plot

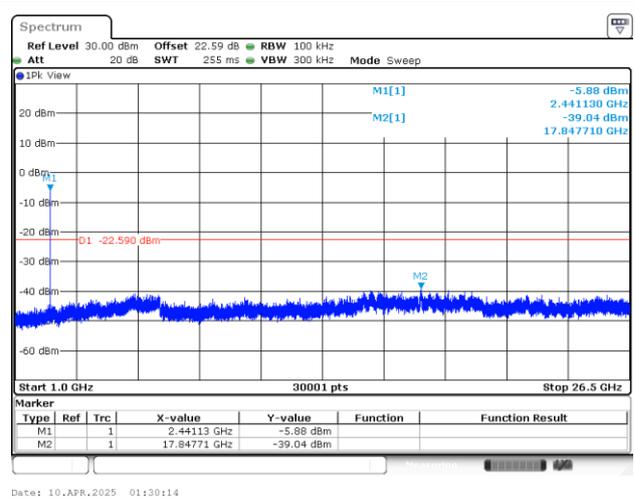




Channel 37


100kHz PSD reference Level Plot

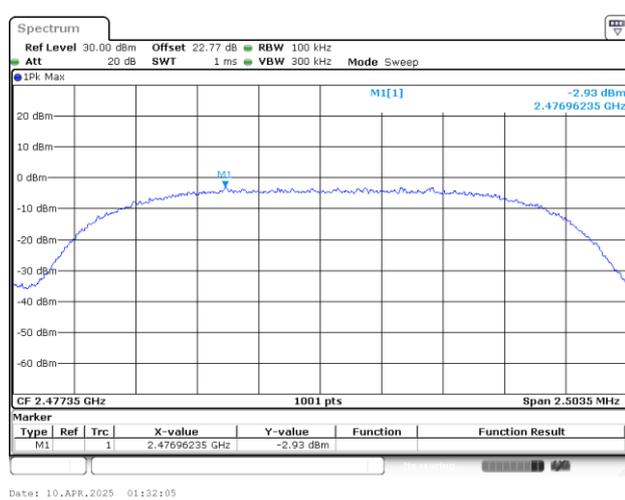


Plot on Channel 37

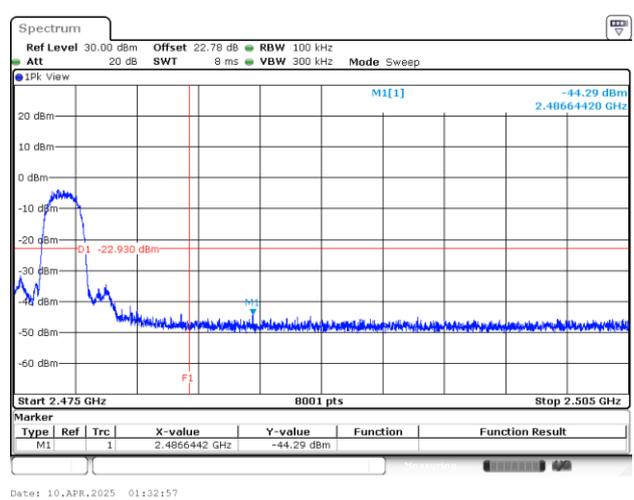

Spurious Emission 30MHz~1GHz Plot

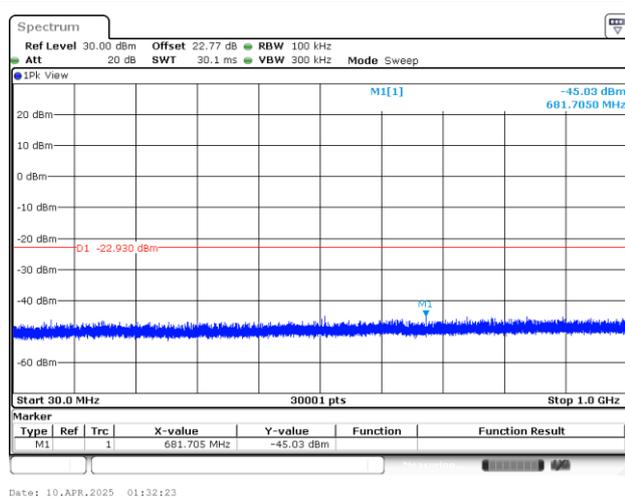


Spurious Emission 1GHz~26.5GHz Plot

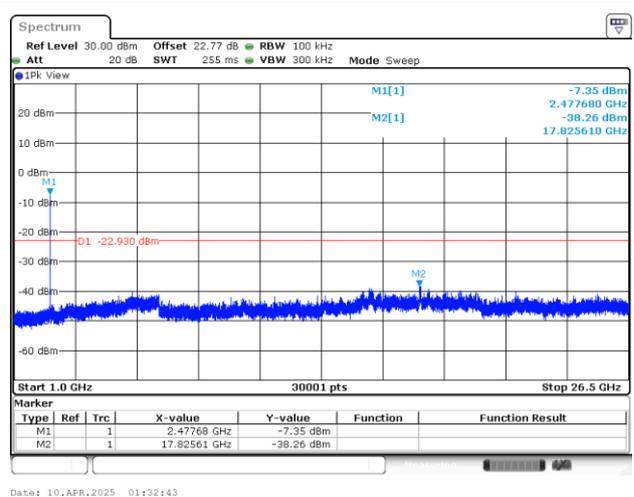



<Ant. 1>


6dB Bandwidth

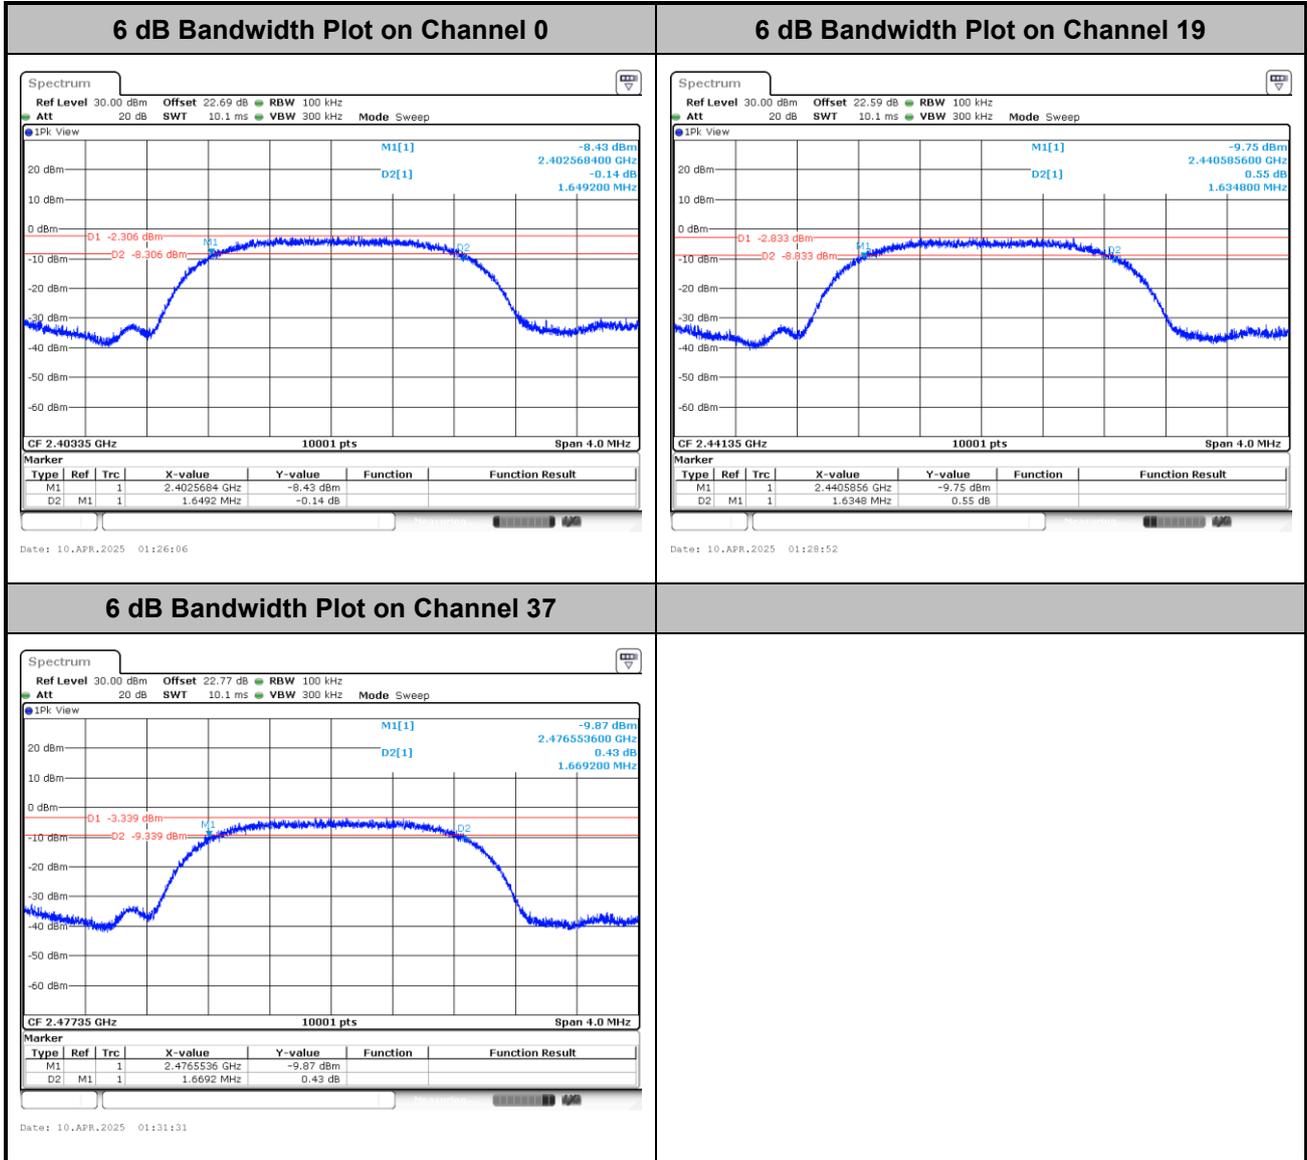




99% Occupied Bandwidth


99% Occupied Bandwidth Plot on Channel 0

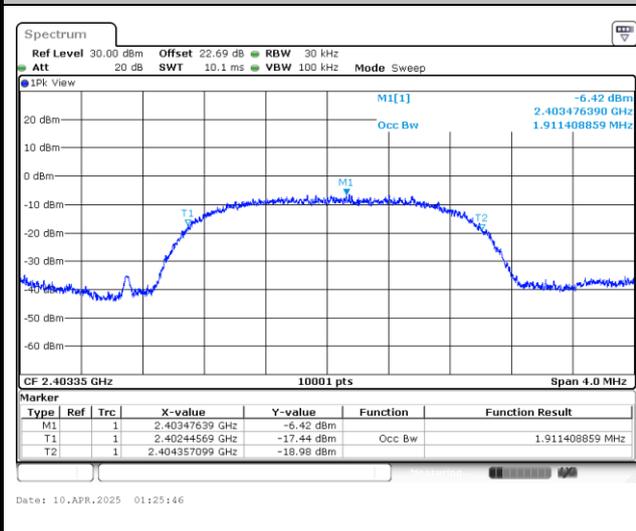

99% Occupied Bandwidth Plot on Channel 19

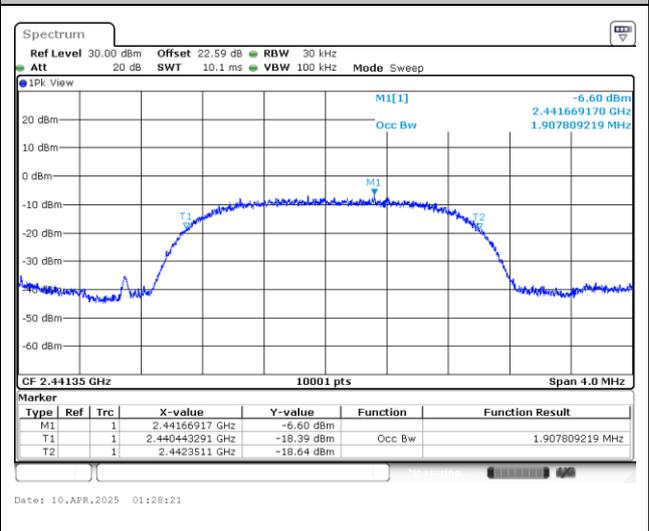


99% Occupied Bandwidth Plot on Channel 37

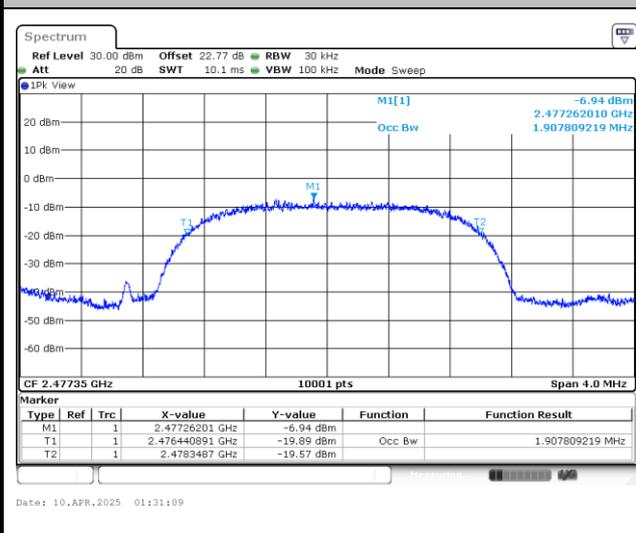




Power Spectral Density (dBm/3kHz)


Power Density (dBm/3kHz) Plot Channel 0

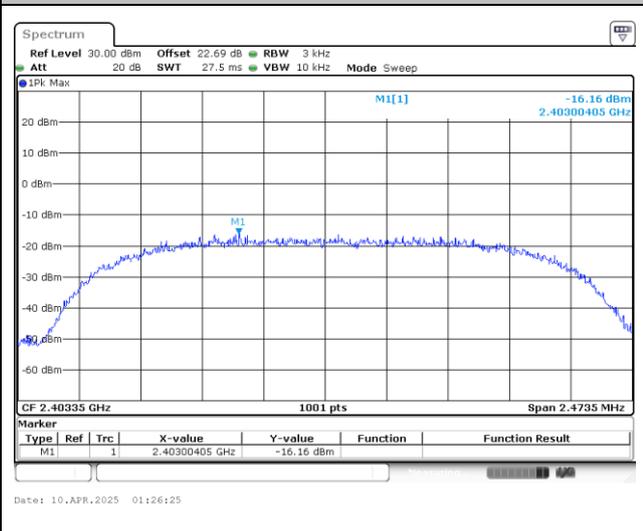

Power Density (dBm/3kHz) Plot Channel 19

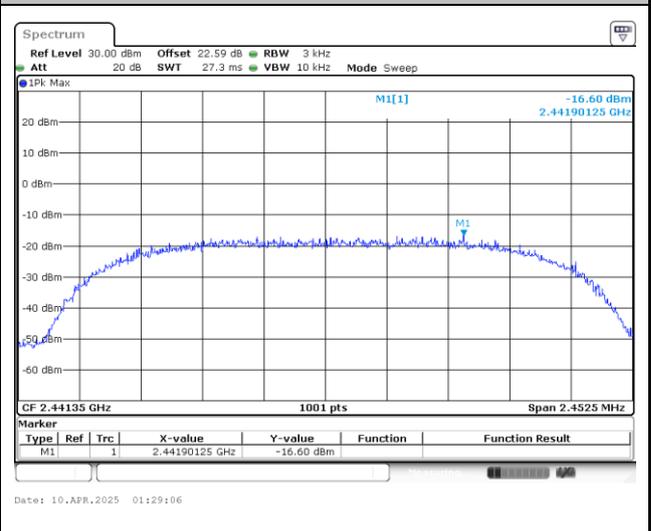

Power Density (dBm/3kHz) Plot Channel 37

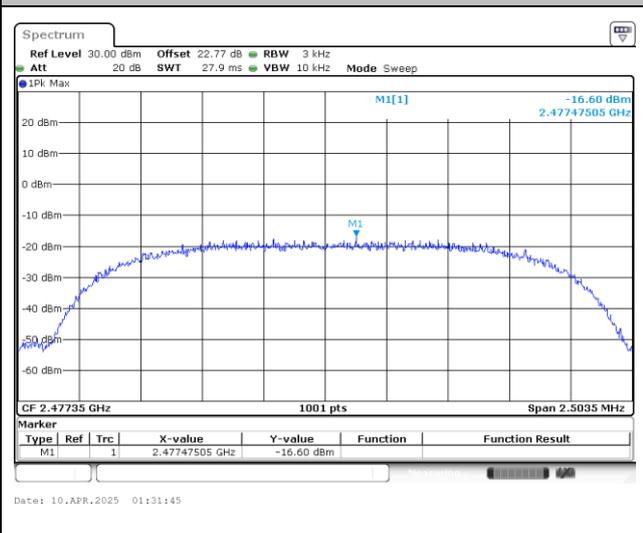





Band Edge and Conducted Spurious Emission

Channel 0


100kHz PSD reference Level Plot

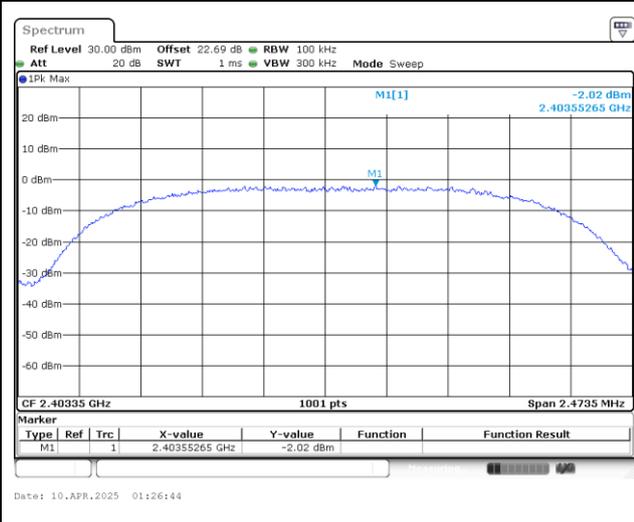


Plot on Channel 0

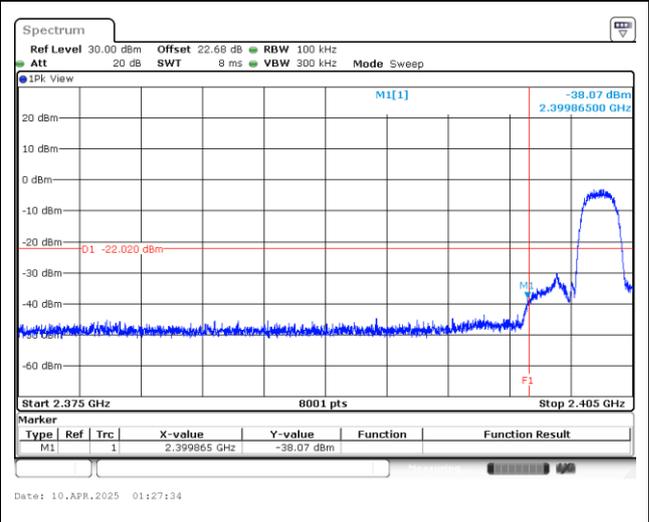

Spurious Emission 30MHz~1GHz Plot

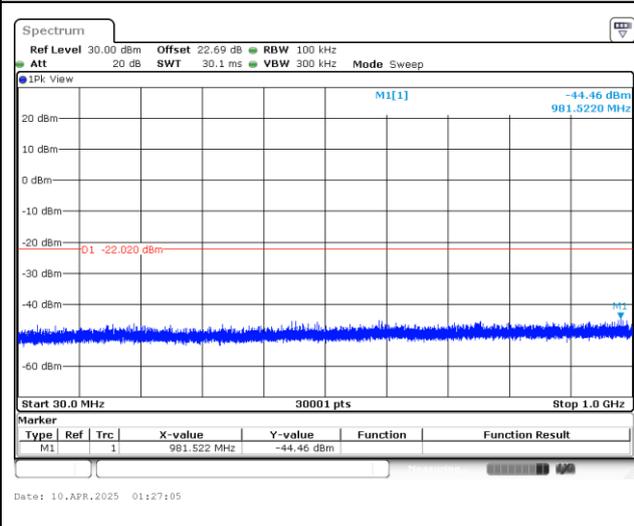


Spurious Emission 1GHz~26.5GHz Plot

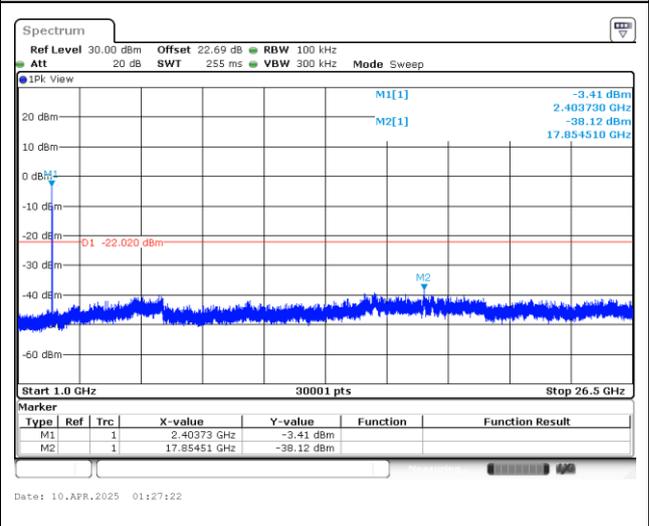




Channel 19

100kHz PSD reference Level Plot

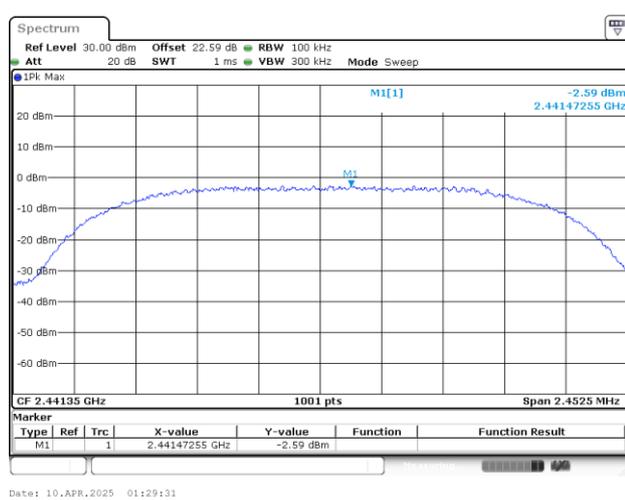


Plot on Channel 19

Spurious Emission 30MHz~1GHz Plot

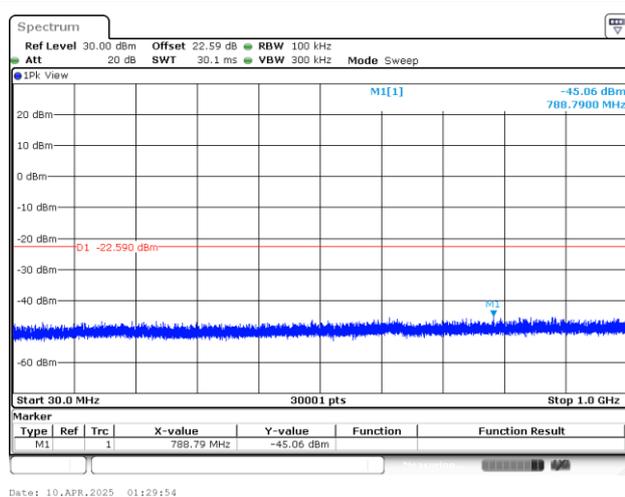


Spurious Emission 1GHz~26.5GHz Plot

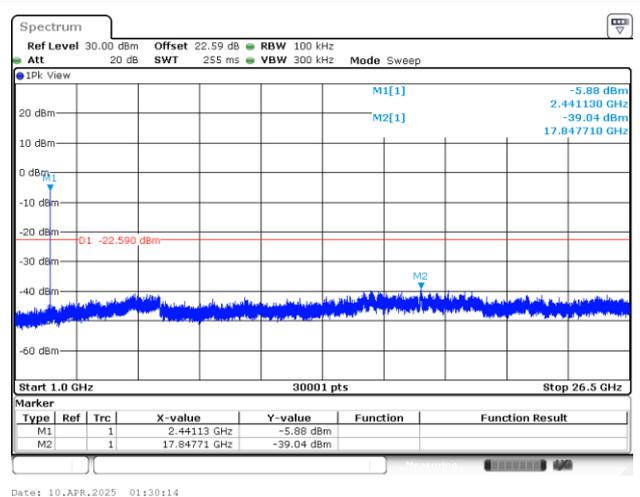




Channel 37


100kHz PSD reference Level Plot

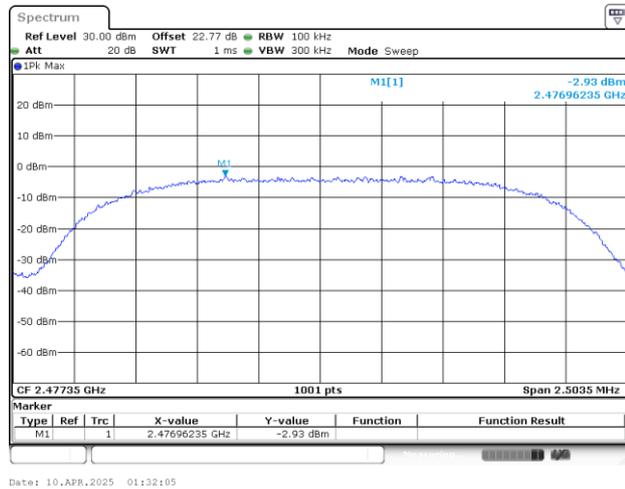


Plot on Channel 37

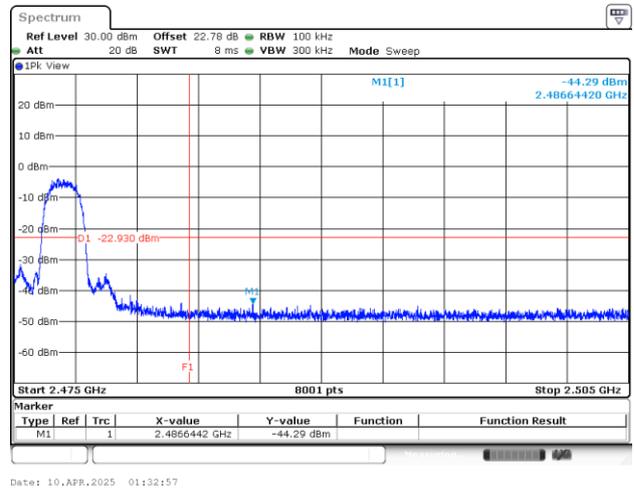

Spurious Emission 30MHz~1GHz Plot

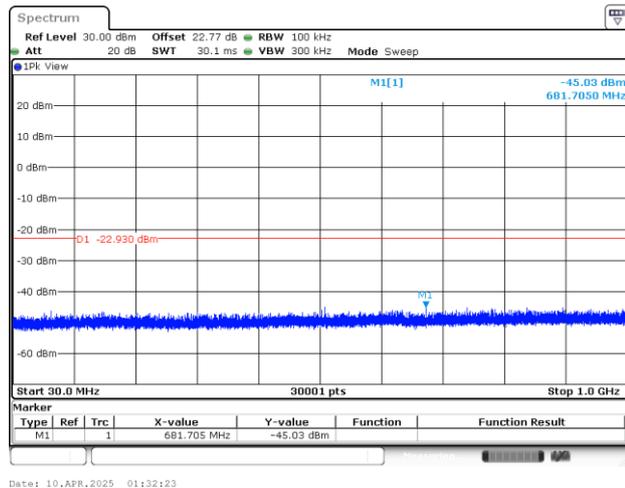

Spurious Emission 1GHz~26.5GHz Plot

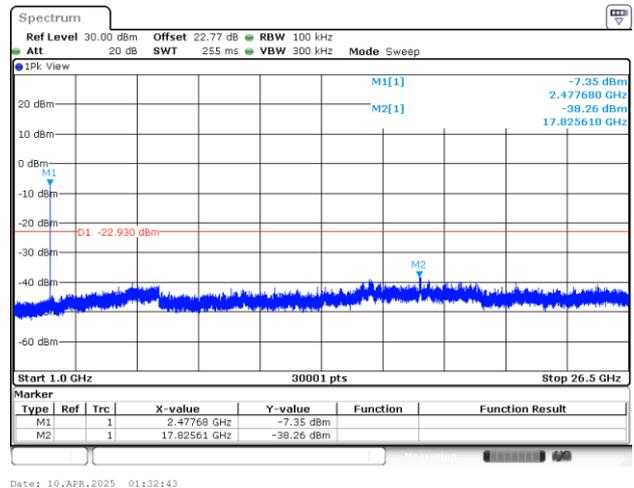




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Howard Huang	Temperature :	23.5~24.9°C
		Relative Humidity :	32.2~40.0%

EUT Information

Report NO : 521312
 Test Mode : Mode 1
 Test Voltage : Power From System
 Phase : Line

Full Spectrum

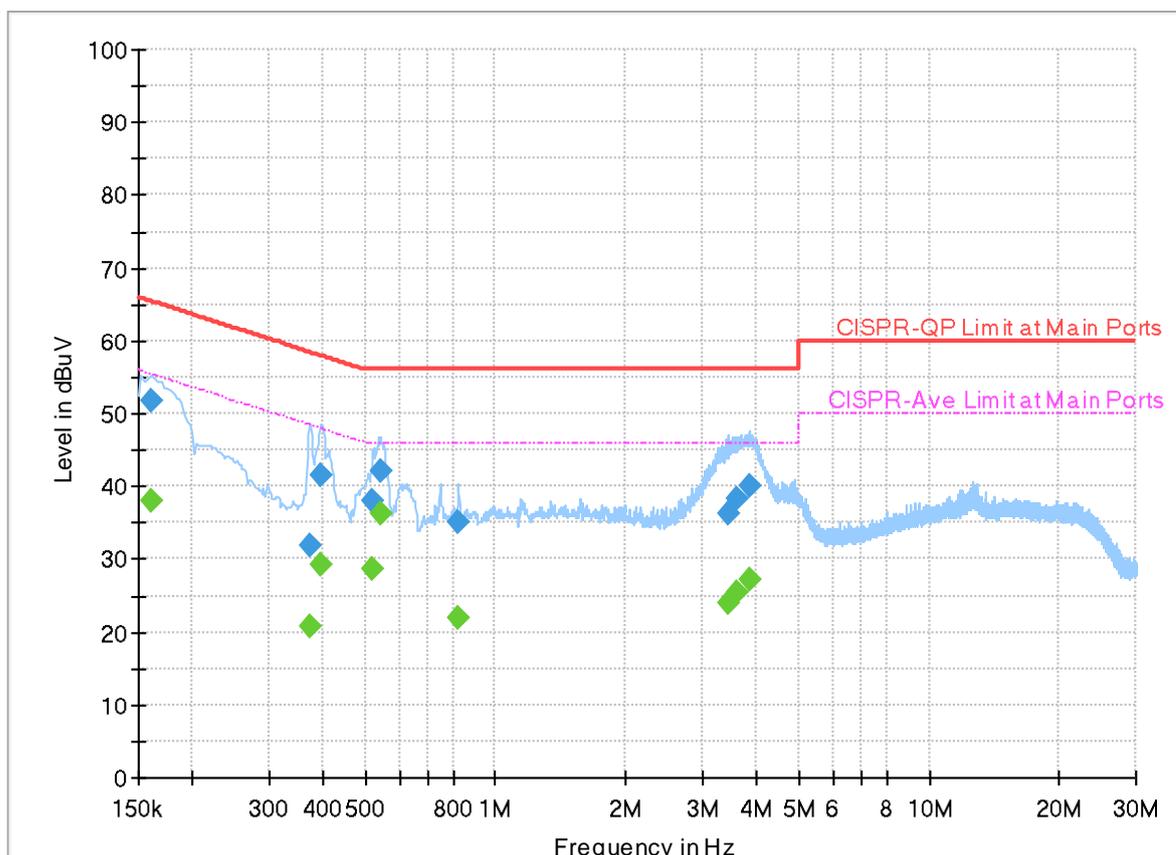


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.161250	---	38.03	55.40	17.37	L1	FLO	20.0
0.161250	51.73	---	65.40	13.67	L1	FLO	20.0
0.372750	---	20.82	48.44	27.62	L1	FLO	20.0
0.372750	32.00	---	58.44	26.44	L1	FLO	20.0
0.395250	---	29.24	47.95	18.71	L1	FLO	20.0
0.395250	41.66	---	57.95	16.29	L1	FLO	20.0
0.521250	---	28.68	46.00	17.32	L1	FLO	20.0
0.521250	38.02	---	56.00	17.98	L1	FLO	20.0
0.543750	---	36.30	46.00	9.70	L1	FLO	20.0
0.543750	42.09	---	56.00	13.91	L1	FLO	20.0
0.820500	---	22.06	46.00	23.94	L1	FLO	20.0
0.820500	34.97	---	56.00	21.03	L1	FLO	20.0
3.446250	---	24.11	46.00	21.89	L1	FLO	20.1
3.446250	36.24	---	56.00	19.76	L1	FLO	20.1
3.601500	---	25.53	46.00	20.47	L1	FLO	20.1
3.601500	38.16	---	56.00	17.84	L1	FLO	20.1
3.837750	---	27.33	46.00	18.67	L1	FLO	20.1
3.837750	40.03	---	56.00	15.97	L1	FLO	20.1

EUT Information

Report NO : 521312
 Test Mode : Mode 1
 Test Voltage : Power From System
 Phase : Neutral

Full Spectrum

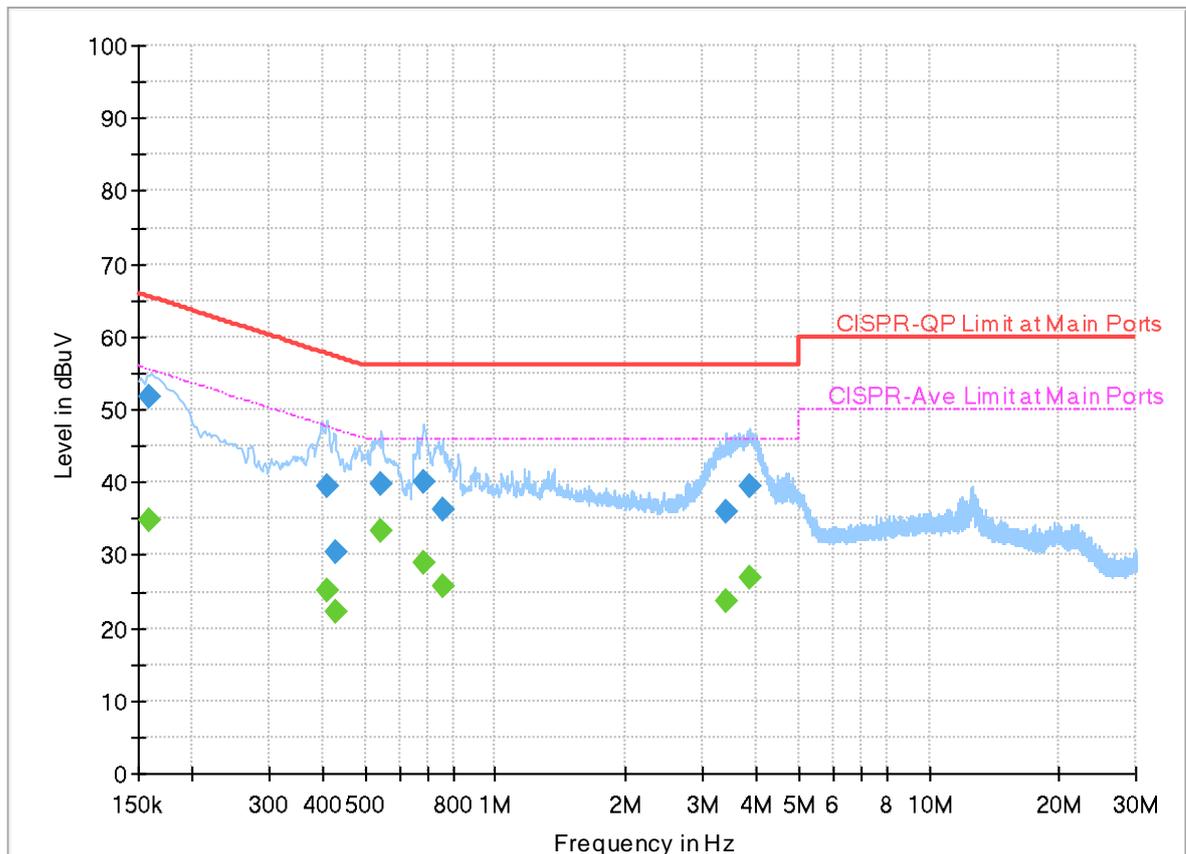

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.159000	---	34.81	55.52	20.71	N	FLO	20.0
0.159000	51.87	---	65.52	13.65	N	FLO	20.0
0.408750	---	25.22	47.67	22.45	N	FLO	20.0
0.408750	39.50	---	57.67	18.17	N	FLO	20.0
0.426750	---	22.30	47.32	25.02	N	FLO	20.0
0.426750	30.42	---	57.32	26.90	N	FLO	20.0
0.546000	---	33.41	46.00	12.59	N	FLO	20.0
0.546000	39.79	---	56.00	16.21	N	FLO	20.0
0.683250	---	29.05	46.00	16.95	N	FLO	20.0
0.683250	39.98	---	56.00	16.02	N	FLO	20.0
0.753000	---	25.69	46.00	20.31	N	FLO	20.0
0.753000	36.24	---	56.00	19.76	N	FLO	20.0
3.412500	---	23.71	46.00	22.29	N	FLO	20.1
3.412500	35.93	---	56.00	20.07	N	FLO	20.1
3.837750	---	27.00	46.00	19.00	N	FLO	20.1
3.837750	39.45	---	56.00	16.55	N	FLO	20.1



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Bill Chang and York Huang	Temperature :	18.8~22.7°C
		Relative Humidity :	58.1~62.4%

Note symbol

-L	Low channel location
-R	High channel location

C1-1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 9	2400-2483.5	0	SRD 2.4G pi/4-DQPSK	01	2403.35	3Mbps	-	-
Mode 10	2400-2483.5	0	SRD 2.4G pi/4-DQPSK	19	2441.35	3Mbps	-	-
Mode 11	2400-2483.5	0	SRD 2.4G pi/4-DQPSK	37	2477.35	3Mbps	-	-
Mode 12	2400-2483.5	0	SRD 2.4G pi/4-DQPSK	37	2477.35	3Mbps	-	LF



C1-2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
9	SRD 2.4G pi/4-DQPSK	01	2389.90	39.59	54.00	-14.41	V	Avg.	Pass	-	Band Edge
	SRD 2.4G pi/4-DQPSK	01	4806.70	46.22	74.00	-27.78	V	Peak	Pass	-	Harmonic
10	SRD 2.4G pi/4-DQPSK	19	2495.94	40.33	54.00	-13.67	V	Avg.	Pass	-	Band Edge
	SRD 2.4G pi/4-DQPSK	19	7324.05	39.25	54.00	-14.75	V	Avg.	Pass	-	Harmonic
11	SRD 2.4G pi/4-DQPSK	37	2483.51	43.29	54.00	-10.71	V	Avg.	Pass	-	Band Edge
	SRD 2.4G pi/4-DQPSK	37	7432.05	39.39	54.00	-14.61	H	Avg.	Pass	-	Harmonic
12	LF	37	30.97	30.59	40.00	-9.41	V	Peak	Pass	-	LF



Mode	9																																																																											
	Band Edge																																																																											
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH01_2403.35MHz																																																																											
ANT	0																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	<p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2372.79</td> <td>52.31</td> <td>74.00</td> <td>-21.69</td> <td>38.98</td> <td>27.30</td> <td>8.60</td> <td>32.58</td> <td>9.44</td> <td>351</td> <td>274</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2372.79	52.31	74.00	-21.69	38.98	27.30	8.60	32.58	9.44	351	274	PEAK	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2403.35</td> <td>84.75</td> <td>-----</td> <td>-----</td> <td>71.23</td> <td>27.44</td> <td>8.66</td> <td>32.60</td> <td>9.44</td> <td>351</td> <td>274</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2403.35	84.75	-----	-----	71.23	27.44	8.66	32.60	9.44	351	274	PEAK
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2372.79	52.31	74.00	-21.69	38.98	27.30	8.60	32.58	9.44	351	274	PEAK																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2403.35	84.75	-----	-----	71.23	27.44	8.66	32.60	9.44	351	274	PEAK																																																																
Avg	<p>Site : 03CH22-HY Condition: AVG_BE_54 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.40</td> <td>39.55</td> <td>54.00</td> <td>-14.45</td> <td>26.11</td> <td>27.38</td> <td>8.63</td> <td>32.59</td> <td>9.44</td> <td>351</td> <td>274</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2388.40	39.55	54.00	-14.45	26.11	27.38	8.63	32.59	9.44	351	274	AVERAGE	<p>Site : 03CH22-HY Condition: AVG_54 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2403.35</td> <td>82.13</td> <td>-----</td> <td>-----</td> <td>68.61</td> <td>27.44</td> <td>8.66</td> <td>32.60</td> <td>9.44</td> <td>351</td> <td>274</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2403.35	82.13	-----	-----	68.61	27.44	8.66	32.60	9.44	351	274	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2388.40	39.55	54.00	-14.45	26.11	27.38	8.63	32.59	9.44	351	274	AVERAGE																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2403.35	82.13	-----	-----	68.61	27.44	8.66	32.60	9.44	351	274	AVERAGE																																																																







Mode	9																																																																											
	Band Edge																																																																											
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH01_2403.35MHz																																																																											
ANT	0																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	<p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2352.58</td> <td>50.87</td> <td>74.00</td> <td>-23.13</td> <td>37.57</td> <td>27.30</td> <td>8.56</td> <td>32.56</td> <td>9.43</td> <td>200</td> <td>174</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2352.58	50.87	74.00	-23.13	37.57	27.30	8.56	32.56	9.43	200	174	PEAK	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2403.35</td> <td>81.19</td> <td>-----</td> <td>-----</td> <td>67.67</td> <td>27.44</td> <td>8.66</td> <td>32.60</td> <td>9.44</td> <td>200</td> <td>174</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2403.35	81.19	-----	-----	67.67	27.44	8.66	32.60	9.44	200	174	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2352.58	50.87	74.00	-23.13	37.57	27.30	8.56	32.56	9.43	200	174	PEAK																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2403.35	81.19	-----	-----	67.67	27.44	8.66	32.60	9.44	200	174	PEAK																																																																
Avg	<p>Site : 03CH22-HY Condition: AVG_BE_54 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.90</td> <td>39.59</td> <td>54.00</td> <td>-14.41</td> <td>26.13</td> <td>27.40</td> <td>8.63</td> <td>32.59</td> <td>9.44</td> <td>200</td> <td>174</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.90	39.59	54.00	-14.41	26.13	27.40	8.63	32.59	9.44	200	174	AVERAGE	<p>Site : 03CH22-HY Condition: AVG_54 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2403.35</td> <td>78.15</td> <td>-----</td> <td>-----</td> <td>64.63</td> <td>27.44</td> <td>8.66</td> <td>32.60</td> <td>9.44</td> <td>200</td> <td>174</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2403.35	78.15	-----	-----	64.63	27.44	8.66	32.60	9.44	200	174	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2389.90	39.59	54.00	-14.41	26.13	27.40	8.63	32.59	9.44	200	174	AVERAGE																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2403.35	78.15	-----	-----	64.63	27.44	8.66	32.60	9.44	200	174	AVERAGE																																																																



Mode	9																																																																															
	Harmonic																																																																															
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH01_2403.35MHz																																																																															
ANT	0																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4806.70</td> <td>46.10</td> <td>74.00</td> <td>-27.90</td> <td>32.77</td> <td>32.33</td> <td>12.43</td> <td>33.67</td> <td>1.41</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4806.70	46.10	74.00	-27.90	32.77	32.33	12.43	33.67	1.41	--	PEAK	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4806.70</td> <td>46.22</td> <td>74.00</td> <td>-27.78</td> <td>32.89</td> <td>32.33</td> <td>12.43</td> <td>33.67</td> <td>1.41</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4806.70	46.22	74.00	-27.78	32.89	32.33	12.43	33.67	1.41	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1	4806.70	46.10	74.00	-27.90	32.77	32.33	12.43	33.67	1.41	--	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1	4806.70	46.22	74.00	-27.78	32.89	32.33	12.43	33.67	1.41	--	PEAK																																																																					

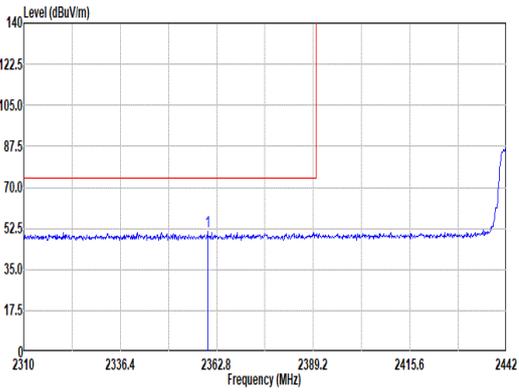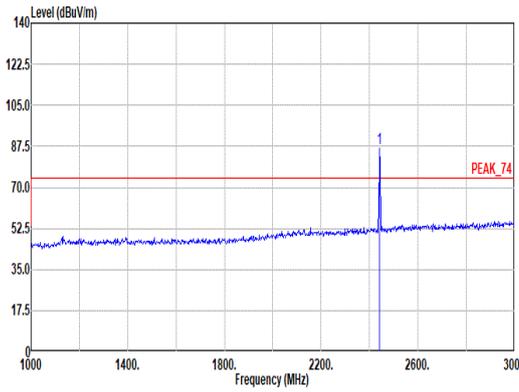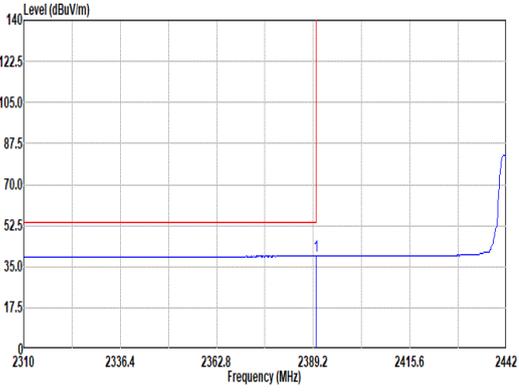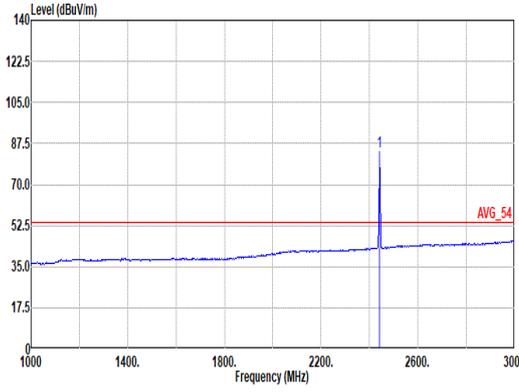

Mode	10																																																																											
	Band Edge - L																																																																											
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH19_2441.35MHz																																																																											
ANT	0																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	 <p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2360.29</td> <td>51.11</td> <td>74.00</td> <td>-22.89</td> <td>37.80</td> <td>27.30</td> <td>8.58</td> <td>32.57</td> <td>9.43</td> <td>103</td> <td>263</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2360.29	51.11	74.00	-22.89	37.80	27.30	8.58	32.57	9.43	103	263	PEAK	 <p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2441.35</td> <td>86.62</td> <td>-----</td> <td>-----</td> <td>72.88</td> <td>27.60</td> <td>8.73</td> <td>32.62</td> <td>9.45</td> <td>103</td> <td>263</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2441.35	86.62	-----	-----	72.88	27.60	8.73	32.62	9.45	103	263	PEAK
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2360.29	51.11	74.00	-22.89	37.80	27.30	8.58	32.57	9.43	103	263	PEAK																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2441.35	86.62	-----	-----	72.88	27.60	8.73	32.62	9.45	103	263	PEAK																																																																
Avg	 <p>Site : 03CH22-HY Condition: AVG_BE_54 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.99</td> <td>39.53</td> <td>54.00</td> <td>-14.47</td> <td>26.07</td> <td>27.40</td> <td>8.63</td> <td>32.59</td> <td>9.44</td> <td>103</td> <td>263</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.99	39.53	54.00	-14.47	26.07	27.40	8.63	32.59	9.44	103	263	AVERAGE	 <p>Site : 03CH22-HY Condition: AVG_54 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2441.35</td> <td>84.15</td> <td>-----</td> <td>-----</td> <td>70.41</td> <td>27.60</td> <td>8.73</td> <td>32.62</td> <td>9.45</td> <td>103</td> <td>263</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2441.35	84.15	-----	-----	70.41	27.60	8.73	32.62	9.45	103	263	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2389.99	39.53	54.00	-14.47	26.07	27.40	8.63	32.59	9.44	103	263	AVERAGE																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2441.35	84.15	-----	-----	70.41	27.60	8.73	32.62	9.45	103	263	AVERAGE																																																																



Mode	10																																							
	Band Edge - R																																							
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH19_2441.35MHz																																							
ANT	0																																							
Pol.	Horizontal	Fundamental																																						
Peak	<p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>1</th> <th>2494.37</th> <th>51.59</th> <th>74.00</th> <th>-22.41</th> <th>37.59</th> <th>27.80</th> <th>8.82</th> <th>32.66</th> <th>9.46</th> <th>103</th> <th>263</th> <th>PEAK</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2494.37</td> <td>51.59</td> <td>74.00</td> <td>-22.41</td> <td>37.59</td> <td>27.80</td> <td>8.82</td> <td>32.66</td> <td>9.46</td> <td>103</td> <td>263</td> <td>PEAK</td> </tr> </tbody> </table>	1	2494.37	51.59	74.00	-22.41	37.59	27.80	8.82	32.66	9.46	103	263	PEAK	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1	2494.37	51.59	74.00	-22.41	37.59	27.80	8.82	32.66	9.46	103	263	PEAK	Blank
1	2494.37	51.59	74.00	-22.41	37.59	27.80	8.82	32.66	9.46	103	263	PEAK																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																													
1	2494.37	51.59	74.00	-22.41	37.59	27.80	8.82	32.66	9.46	103	263	PEAK																												
Avg	<p>Site : 03CH22-HY Condition: AVG_BE_54 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>1</th> <th>2498.09</th> <th>40.25</th> <th>54.00</th> <th>-13.75</th> <th>26.24</th> <th>27.80</th> <th>8.83</th> <th>32.66</th> <th>9.46</th> <th>103</th> <th>263</th> <th>AVERAGE</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2498.09</td> <td>40.25</td> <td>54.00</td> <td>-13.75</td> <td>26.24</td> <td>27.80</td> <td>8.83</td> <td>32.66</td> <td>9.46</td> <td>103</td> <td>263</td> <td>AVERAGE</td> </tr> </tbody> </table>	1	2498.09	40.25	54.00	-13.75	26.24	27.80	8.83	32.66	9.46	103	263	AVERAGE	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1	2498.09	40.25	54.00	-13.75	26.24	27.80	8.83	32.66	9.46	103	263	AVERAGE	Blank
1	2498.09	40.25	54.00	-13.75	26.24	27.80	8.83	32.66	9.46	103	263	AVERAGE																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																													
1	2498.09	40.25	54.00	-13.75	26.24	27.80	8.83	32.66	9.46	103	263	AVERAGE																												



Mode	10																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH19_2441.35MHz																																																																																	
ANT	0																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2365.18</td> <td>50.83</td> <td>74.00</td> <td>-23.17</td> <td>37.51</td> <td>27.30</td> <td>8.59</td> <td>32.57</td> <td>9.43</td> <td>118</td> <td>4</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2365.18	50.83	74.00	-23.17	37.51	27.30	8.59	32.57	9.43	118	4	PEAK	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2441.35</td> <td>96.39</td> <td>-----</td> <td>-----</td> <td>82.65</td> <td>27.60</td> <td>8.73</td> <td>32.62</td> <td>9.45</td> <td>118</td> <td>4</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2441.35	96.39	-----	-----	82.65	27.60	8.73	32.62	9.45	118	4	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2365.18	50.83	74.00	-23.17	37.51	27.30	8.59	32.57	9.43	118	4	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2441.35	96.39	-----	-----	82.65	27.60	8.73	32.62	9.45	118	4	PEAK																																																																						
Avg	<p>Site : 03CH22-HY Condition: AVG_BE_54 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.80</td> <td>39.55</td> <td>54.00</td> <td>-14.45</td> <td>26.10</td> <td>27.39</td> <td>8.63</td> <td>32.59</td> <td>9.44</td> <td>118</td> <td>4</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2388.80	39.55	54.00	-14.45	26.10	27.39	8.63	32.59	9.44	118	4	AVERAGE	<p>Site : 03CH22-HY Condition: AVG_54 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2441.35</td> <td>93.89</td> <td>-----</td> <td>-----</td> <td>80.15</td> <td>27.60</td> <td>8.73</td> <td>32.62</td> <td>9.45</td> <td>118</td> <td>4</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2441.35	93.89	-----	-----	80.15	27.60	8.73	32.62	9.45	118	4	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2388.80	39.55	54.00	-14.45	26.10	27.39	8.63	32.59	9.44	118	4	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2441.35	93.89	-----	-----	80.15	27.60	8.73	32.62	9.45	118	4	AVERAGE																																																																						







Mode	10																																					
	Band Edge - R																																					
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH19_2441.35MHz																																					
ANT	0																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2496.58</td> <td>51.36</td> <td>74.00</td> <td>-22.64</td> <td>37.35</td> <td>27.80</td> <td>8.83</td> <td>32.66</td> <td>9.46</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2496.58	51.36	74.00	-22.64	37.35	27.80	8.83	32.66	9.46	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																														
1 2496.58	51.36	74.00	-22.64	37.35	27.80	8.83	32.66	9.46																														
Avg	<p>Site : 03CH22-HY Condition: AVG_BE_54 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2495.94</td> <td>40.33</td> <td>54.00</td> <td>-13.67</td> <td>26.32</td> <td>27.80</td> <td>8.83</td> <td>32.66</td> <td>9.46</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2495.94	40.33	54.00	-13.67	26.32	27.80	8.83	32.66	9.46	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																														
1 2495.94	40.33	54.00	-13.67	26.32	27.80	8.83	32.66	9.46																														



Mode	10																																																																																																																																			
	Harmonic																																																																																																																																			
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH19_2441.35MHz																																																																																																																																			
ANT	0																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																		
Peak Avg	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.70</td> <td>47.01</td> <td>74.00</td> <td>-26.99</td> <td>33.57</td> <td>32.57</td> <td>12.49</td> <td>33.67</td> <td>1.24</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7324.05</td> <td>49.72</td> <td>74.00</td> <td>-24.28</td> <td>32.16</td> <td>36.70</td> <td>15.41</td> <td>36.61</td> <td>1.01</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7324.05</td> <td>39.24</td> <td>54.00</td> <td>-14.76</td> <td>21.68</td> <td>36.70</td> <td>15.41</td> <td>36.61</td> <td>1.01</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4882.70	47.01	74.00	-26.99	33.57	32.57	12.49	33.67	1.24	--	--	PEAK	2	7324.05	49.72	74.00	-24.28	32.16	36.70	15.41	36.61	1.01	--	--	PEAK	3	7324.05	39.24	54.00	-14.76	21.68	36.70	15.41	36.61	1.01	--	--	Average	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.70</td> <td>47.26</td> <td>74.00</td> <td>-26.74</td> <td>33.82</td> <td>32.57</td> <td>12.49</td> <td>33.67</td> <td>1.24</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7324.05</td> <td>50.16</td> <td>74.00</td> <td>-23.84</td> <td>32.60</td> <td>36.70</td> <td>15.41</td> <td>36.61</td> <td>1.01</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7324.05</td> <td>39.25</td> <td>54.00</td> <td>-14.75</td> <td>21.69</td> <td>36.70</td> <td>15.41</td> <td>36.61</td> <td>1.01</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4882.70	47.26	74.00	-26.74	33.82	32.57	12.49	33.67	1.24	--	--	PEAK	2	7324.05	50.16	74.00	-23.84	32.60	36.70	15.41	36.61	1.01	--	--	PEAK	3	7324.05	39.25	54.00	-14.75	21.69	36.70	15.41	36.61	1.01	--	--	Average
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																							
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	4882.70	47.01	74.00	-26.99	33.57	32.57	12.49	33.67	1.24	--	--	PEAK																																																																																																																								
2	7324.05	49.72	74.00	-24.28	32.16	36.70	15.41	36.61	1.01	--	--	PEAK																																																																																																																								
3	7324.05	39.24	54.00	-14.76	21.68	36.70	15.41	36.61	1.01	--	--	Average																																																																																																																								
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																								
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	4882.70	47.26	74.00	-26.74	33.82	32.57	12.49	33.67	1.24	--	--	PEAK																																																																																																																								
2	7324.05	50.16	74.00	-23.84	32.60	36.70	15.41	36.61	1.01	--	--	PEAK																																																																																																																								
3	7324.05	39.25	54.00	-14.75	21.69	36.70	15.41	36.61	1.01	--	--	Average																																																																																																																								

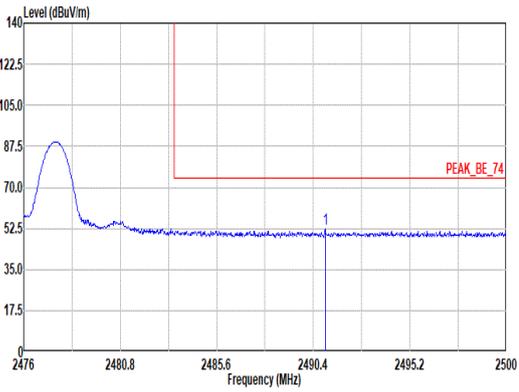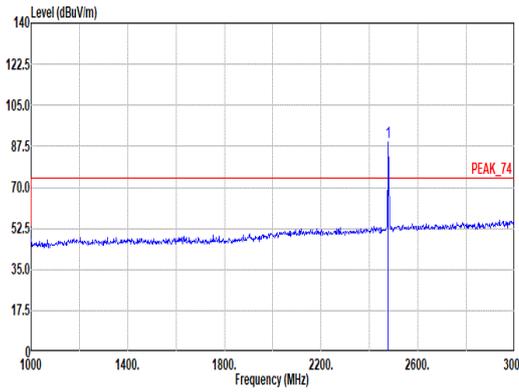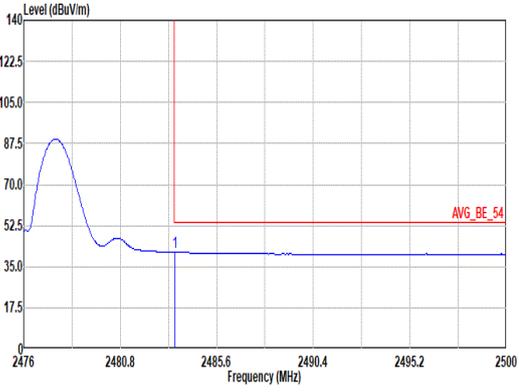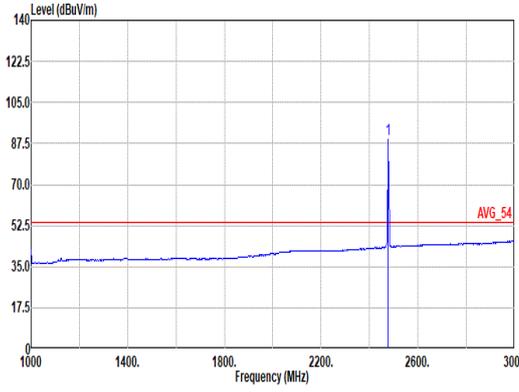

		11																																																																														
Mode	Band Edge																																																																															
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH37_2477.35MHz																																																																															
ANT	0																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) showing a peak at 2491.00 MHz. A red horizontal line indicates the limit at 74.00 dBuV/m. The peak is labeled PEAK_BE_74.</p> <p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2491.00</td> <td>52.05</td> <td>74.00</td> <td>-21.95</td> <td>38.04</td> <td>27.80</td> <td>8.82</td> <td>32.65</td> <td>9.46</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2491.00	52.05	74.00	-21.95	38.04	27.80	8.82	32.65	9.46	100	110	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) showing a peak at 2477.35 MHz. A red horizontal line indicates the limit at 75.45 dBuV/m. The peak is labeled PEAK_74.</p> <p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2477.35</td> <td>89.31</td> <td>-----</td> <td>-----</td> <td>75.45</td> <td>27.68</td> <td>8.79</td> <td>32.65</td> <td>9.46</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2477.35	89.31	-----	-----	75.45	27.68	8.79	32.65	9.46	100	110	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																								
1 2491.00	52.05	74.00	-21.95	38.04	27.80	8.82	32.65	9.46	100	110	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																								
1 2477.35	89.31	-----	-----	75.45	27.68	8.79	32.65	9.46	100	110	PEAK																																																																					
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) showing an average level at 2483.51 MHz. A red horizontal line indicates the limit at 54.00 dBuV/m. The level is labeled AVG_BE_54.</p> <p>Site : 03CH22-HY Condition: AVG_BE_54 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2483.51</td> <td>41.13</td> <td>54.00</td> <td>-12.87</td> <td>27.20</td> <td>27.74</td> <td>8.80</td> <td>32.65</td> <td>9.46</td> <td>100</td> <td>110</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2483.51	41.13	54.00	-12.87	27.20	27.74	8.80	32.65	9.46	100	110	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) showing an average level at 2477.35 MHz. A red horizontal line indicates the limit at 75.38 dBuV/m. The level is labeled AVG_54.</p> <p>Site : 03CH22-HY Condition: AVG_54 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2477.35</td> <td>89.24</td> <td>-----</td> <td>-----</td> <td>75.38</td> <td>27.68</td> <td>8.79</td> <td>32.65</td> <td>9.46</td> <td>100</td> <td>110</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2477.35	89.24	-----	-----	75.38	27.68	8.79	32.65	9.46	100	110	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																								
1 2483.51	41.13	54.00	-12.87	27.20	27.74	8.80	32.65	9.46	100	110	AVERAGE																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																								
1 2477.35	89.24	-----	-----	75.38	27.68	8.79	32.65	9.46	100	110	AVERAGE																																																																					



Mode	11																																																																											
	Band Edge																																																																											
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH37_2477.35MHz																																																																											
ANT	0																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	<p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.70</td> <td>53.39</td> <td>74.00</td> <td>-20.61</td> <td>39.46</td> <td>27.74</td> <td>8.80</td> <td>32.65</td> <td>9.46</td> <td>116</td> <td>204</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.70	53.39	74.00	-20.61	39.46	27.74	8.80	32.65	9.46	116	204	PEAK	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2477.35</td> <td>96.35</td> <td>-----</td> <td>-----</td> <td>82.49</td> <td>27.68</td> <td>8.79</td> <td>32.65</td> <td>9.46</td> <td>116</td> <td>204</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2477.35	96.35	-----	-----	82.49	27.68	8.79	32.65	9.46	116	204	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2483.70	53.39	74.00	-20.61	39.46	27.74	8.80	32.65	9.46	116	204	PEAK																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2477.35	96.35	-----	-----	82.49	27.68	8.79	32.65	9.46	116	204	PEAK																																																																
Avg	<p>Site : 03CH22-HY Condition: AVG_BE_54 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>43.29</td> <td>54.00</td> <td>-10.71</td> <td>29.36</td> <td>27.74</td> <td>8.80</td> <td>32.65</td> <td>9.46</td> <td>116</td> <td>204</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.51	43.29	54.00	-10.71	29.36	27.74	8.80	32.65	9.46	116	204	AVERAGE	<p>Site : 03CH22-HY Condition: AVG_54 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2477.35</td> <td>96.28</td> <td>-----</td> <td>-----</td> <td>82.42</td> <td>27.68</td> <td>8.79</td> <td>32.65</td> <td>9.46</td> <td>116</td> <td>204</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2477.35	96.28	-----	-----	82.42	27.68	8.79	32.65	9.46	116	204	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2483.51	43.29	54.00	-10.71	29.36	27.74	8.80	32.65	9.46	116	204	AVERAGE																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2477.35	96.28	-----	-----	82.42	27.68	8.79	32.65	9.46	116	204	AVERAGE																																																																



Mode	11																																																																																																																																													
	Harmonic																																																																																																																																													
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH37_2477.35MHz																																																																																																																																													
ANT	0																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4954.70</td> <td>46.33</td> <td>74.00</td> <td>-27.67</td> <td>32.63</td> <td>32.94</td> <td>12.56</td> <td>33.67</td> <td>1.09</td> <td>--</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7432.05</td> <td>49.61</td> <td>74.00</td> <td>-24.39</td> <td>32.46</td> <td>36.30</td> <td>15.54</td> <td>36.78</td> <td>1.03</td> <td>--</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7432.05</td> <td>39.39</td> <td>54.00</td> <td>-14.61</td> <td>22.24</td> <td>36.30</td> <td>15.54</td> <td>36.78</td> <td>1.03</td> <td>--</td> <td>--</td> <td>--</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4954.70	46.33	74.00	-27.67	32.63	32.94	12.56	33.67	1.09	--	--	--	PEAK	2	7432.05	49.61	74.00	-24.39	32.46	36.30	15.54	36.78	1.03	--	--	--	PEAK	3	7432.05	39.39	54.00	-14.61	22.24	36.30	15.54	36.78	1.03	--	--	--	AVERAGE	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4954.70</td> <td>47.17</td> <td>74.00</td> <td>-26.83</td> <td>33.47</td> <td>32.94</td> <td>12.56</td> <td>33.67</td> <td>1.09</td> <td>--</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7432.05</td> <td>49.44</td> <td>74.00</td> <td>-24.56</td> <td>32.29</td> <td>36.30</td> <td>15.54</td> <td>36.78</td> <td>1.03</td> <td>--</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7432.05</td> <td>39.23</td> <td>54.00</td> <td>-14.77</td> <td>22.00</td> <td>36.30</td> <td>15.54</td> <td>36.78</td> <td>1.03</td> <td>--</td> <td>--</td> <td>--</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4954.70	47.17	74.00	-26.83	33.47	32.94	12.56	33.67	1.09	--	--	--	PEAK	2	7432.05	49.44	74.00	-24.56	32.29	36.30	15.54	36.78	1.03	--	--	--	PEAK	3	7432.05	39.23	54.00	-14.77	22.00	36.30	15.54	36.78	1.03	--	--	--	AVERAGE
	Peak	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																		
1	4954.70	46.33	74.00	-27.67	32.63	32.94	12.56	33.67	1.09	--	--	--	PEAK																																																																																																																																	
2	7432.05	49.61	74.00	-24.39	32.46	36.30	15.54	36.78	1.03	--	--	--	PEAK																																																																																																																																	
3	7432.05	39.39	54.00	-14.61	22.24	36.30	15.54	36.78	1.03	--	--	--	AVERAGE																																																																																																																																	
Peak	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																		
1	4954.70	47.17	74.00	-26.83	33.47	32.94	12.56	33.67	1.09	--	--	--	PEAK																																																																																																																																	
2	7432.05	49.44	74.00	-24.56	32.29	36.30	15.54	36.78	1.03	--	--	--	PEAK																																																																																																																																	
3	7432.05	39.23	54.00	-14.77	22.00	36.30	15.54	36.78	1.03	--	--	--	AVERAGE																																																																																																																																	



Mode	12																																																																																																																																																																																							
	LF																																																																																																																																																																																							
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH37_2477.35MHz																																																																																																																																																																																							
ANT	0																																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																																						
QP/ Peak	<p>Site : 03CH22-HY Condition: QP 3m Bilog_63304_241217 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>22.61</td><td>40.00</td><td>-17.39</td><td>29.84</td><td>24.43</td><td>0.98</td><td>32.67</td><td>0.03</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>213.33</td><td>28.01</td><td>43.50</td><td>-15.49</td><td>43.04</td><td>14.97</td><td>2.58</td><td>32.62</td><td>0.04</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>229.82</td><td>28.77</td><td>46.00</td><td>-17.23</td><td>42.57</td><td>16.09</td><td>2.68</td><td>32.62</td><td>0.05</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>499.48</td><td>33.15</td><td>46.00</td><td>-12.85</td><td>37.89</td><td>23.90</td><td>3.94</td><td>32.80</td><td>0.22</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>736.16</td><td>30.80</td><td>46.00</td><td>-15.20</td><td>30.63</td><td>27.95</td><td>4.79</td><td>32.69</td><td>0.12</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>954.41</td><td>34.15</td><td>46.00</td><td>-11.85</td><td>28.37</td><td>31.46</td><td>5.42</td><td>31.30</td><td>0.20</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	30.97	22.61	40.00	-17.39	29.84	24.43	0.98	32.67	0.03	--	--	Peak	2	213.33	28.01	43.50	-15.49	43.04	14.97	2.58	32.62	0.04	--	--	Peak	3	229.82	28.77	46.00	-17.23	42.57	16.09	2.68	32.62	0.05	--	--	Peak	4	499.48	33.15	46.00	-12.85	37.89	23.90	3.94	32.80	0.22	--	--	Peak	5	736.16	30.80	46.00	-15.20	30.63	27.95	4.79	32.69	0.12	--	--	Peak	6	954.41	34.15	46.00	-11.85	28.37	31.46	5.42	31.30	0.20	--	--	Peak	<p>Site : 03CH22-HY Condition: QP 3m Bilog_63304_241217 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>30.59</td><td>40.00</td><td>-9.41</td><td>37.82</td><td>24.43</td><td>0.98</td><td>32.67</td><td>0.03</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>159.98</td><td>30.92</td><td>43.50</td><td>-12.58</td><td>44.84</td><td>16.40</td><td>2.24</td><td>32.64</td><td>0.08</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>267.65</td><td>27.49</td><td>46.00</td><td>-18.51</td><td>37.59</td><td>19.57</td><td>2.91</td><td>32.62</td><td>0.04</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>498.51</td><td>36.04</td><td>46.00</td><td>-9.96</td><td>40.78</td><td>23.90</td><td>3.94</td><td>32.80</td><td>0.22</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>749.74</td><td>33.65</td><td>46.00</td><td>-12.35</td><td>33.02</td><td>28.29</td><td>4.83</td><td>32.62</td><td>0.13</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>958.29</td><td>35.99</td><td>46.00</td><td>-10.01</td><td>30.10</td><td>31.50</td><td>5.44</td><td>31.26</td><td>0.21</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	30.97	30.59	40.00	-9.41	37.82	24.43	0.98	32.67	0.03	--	--	Peak	2	159.98	30.92	43.50	-12.58	44.84	16.40	2.24	32.64	0.08	--	--	Peak	3	267.65	27.49	46.00	-18.51	37.59	19.57	2.91	32.62	0.04	--	--	Peak	4	498.51	36.04	46.00	-9.96	40.78	23.90	3.94	32.80	0.22	--	--	Peak	5	749.74	33.65	46.00	-12.35	33.02	28.29	4.83	32.62	0.13	--	--	Peak	6	958.29	35.99	46.00	-10.01	30.10	31.50	5.44	31.26	0.21	--	--	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																																												
1	30.97	22.61	40.00	-17.39	29.84	24.43	0.98	32.67	0.03	--	--	Peak																																																																																																																																																																												
2	213.33	28.01	43.50	-15.49	43.04	14.97	2.58	32.62	0.04	--	--	Peak																																																																																																																																																																												
3	229.82	28.77	46.00	-17.23	42.57	16.09	2.68	32.62	0.05	--	--	Peak																																																																																																																																																																												
4	499.48	33.15	46.00	-12.85	37.89	23.90	3.94	32.80	0.22	--	--	Peak																																																																																																																																																																												
5	736.16	30.80	46.00	-15.20	30.63	27.95	4.79	32.69	0.12	--	--	Peak																																																																																																																																																																												
6	954.41	34.15	46.00	-11.85	28.37	31.46	5.42	31.30	0.20	--	--	Peak																																																																																																																																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																																												
1	30.97	30.59	40.00	-9.41	37.82	24.43	0.98	32.67	0.03	--	--	Peak																																																																																																																																																																												
2	159.98	30.92	43.50	-12.58	44.84	16.40	2.24	32.64	0.08	--	--	Peak																																																																																																																																																																												
3	267.65	27.49	46.00	-18.51	37.59	19.57	2.91	32.62	0.04	--	--	Peak																																																																																																																																																																												
4	498.51	36.04	46.00	-9.96	40.78	23.90	3.94	32.80	0.22	--	--	Peak																																																																																																																																																																												
5	749.74	33.65	46.00	-12.35	33.02	28.29	4.83	32.62	0.13	--	--	Peak																																																																																																																																																																												
6	958.29	35.99	46.00	-10.01	30.10	31.50	5.44	31.26	0.21	--	--	Peak																																																																																																																																																																												



C2-1. Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 13	2400-2483.5	1	SRD 2.4G pi/4-DQPSK	01	2403.35	3Mbps	-	-
Mode 14	2400-2483.5	1	SRD 2.4G pi/4-DQPSK	19	2441.35	3Mbps	-	-
Mode 15	2400-2483.5	1	SRD 2.4G pi/4-DQPSK	37	2477.35	3Mbps	-	-
Mode 16	2400-2483.5	1	SRD 2.4G pi/4-DQPSK	37	2477.35	3Mbps	-	LF



C2-2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
13	SRD 2.4G pi/4-DQPSK	01	2389.34	39.84	54.00	-14.16	V	Avg.	Pass	-	Band Edge
	SRD 2.4G pi/4-DQPSK	01	4806.70	46.14	74.00	-27.86	H	Peak	Pass	-	Harmonic
14	SRD 2.4G pi/4-DQPSK	19	2494.40	40.42	54.00	-13.58	V	Avg.	Pass	-	Band Edge
	SRD 2.4G pi/4-DQPSK	19	7324.05	39.93	54.00	-14.07	H	Avg.	Pass	-	Harmonic
15	SRD 2.4G pi/4-DQPSK	37	2483.51	41.43	54.00	-12.57	V	Avg.	Pass	-	Band Edge
	SRD 2.4G pi/4-DQPSK	37	7432.05	38.66	54.00	-15.34	H	Avg.	Pass	-	Harmonic
16	LF	37	948.59	36.28	46.00	-9.72	V	Peak	Pass	-	LF

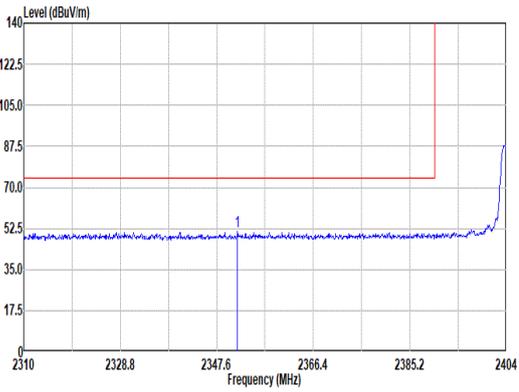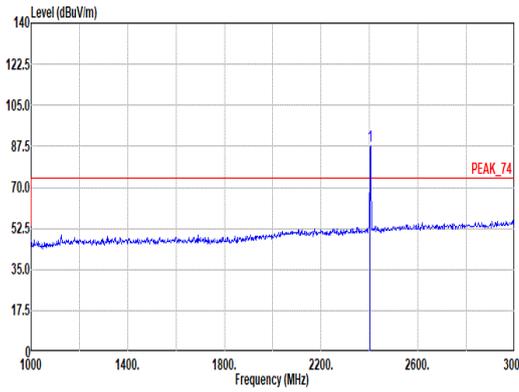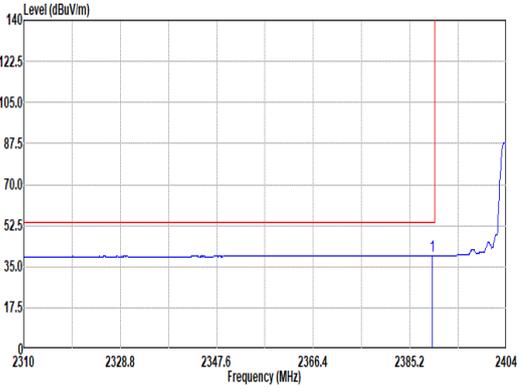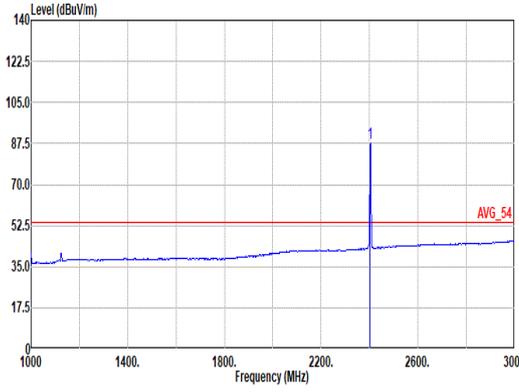

Mode	13																																																																											
	Band Edge																																																																											
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH01_2403.35MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	 <p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2351.64</td> <td>51.22</td> <td>74.00</td> <td>-22.78</td> <td>37.92</td> <td>27.30</td> <td>8.56</td> <td>32.56</td> <td>9.43</td> <td>307</td> <td>44</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2351.64	51.22	74.00	-22.78	37.92	27.30	8.56	32.56	9.43	307	44	PEAK	 <p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2403.35</td> <td>87.85</td> <td>-----</td> <td>-----</td> <td>74.33</td> <td>27.44</td> <td>8.66</td> <td>32.60</td> <td>9.44</td> <td>307</td> <td>44</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2403.35	87.85	-----	-----	74.33	27.44	8.66	32.60	9.44	307	44	PEAK
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2351.64	51.22	74.00	-22.78	37.92	27.30	8.56	32.56	9.43	307	44	PEAK																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2403.35	87.85	-----	-----	74.33	27.44	8.66	32.60	9.44	307	44	PEAK																																																																
Avg	 <p>Site : 03CH22-HY Condition: AVG_BE_54 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.62</td> <td>39.73</td> <td>54.00</td> <td>-14.27</td> <td>26.27</td> <td>27.40</td> <td>8.63</td> <td>32.59</td> <td>9.44</td> <td>307</td> <td>44</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.62	39.73	54.00	-14.27	26.27	27.40	8.63	32.59	9.44	307	44	AVERAGE	 <p>Site : 03CH22-HY Condition: AVG_54 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2403.35</td> <td>87.82</td> <td>-----</td> <td>-----</td> <td>74.30</td> <td>27.44</td> <td>8.66</td> <td>32.60</td> <td>9.44</td> <td>307</td> <td>44</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2403.35	87.82	-----	-----	74.30	27.44	8.66	32.60	9.44	307	44	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2389.62	39.73	54.00	-14.27	26.27	27.40	8.63	32.59	9.44	307	44	AVERAGE																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2403.35	87.82	-----	-----	74.30	27.44	8.66	32.60	9.44	307	44	AVERAGE																																																																







Mode	13																																																																	
	Band Edge																																																																	
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH01_2403.35MHz																																																																	
ANT	1																																																																	
Pol.	Vertical	Fundamental																																																																
Peak	<p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2376.83</td> <td>51.19</td> <td>74.00</td> <td>-22.81</td> <td>37.84</td> <td>27.30</td> <td>8.61 32.58 9.44 110 133 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2376.83	51.19	74.00	-22.81	37.84	27.30	8.61 32.58 9.44 110 133 PEAK	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2403.35</td> <td>92.30</td> <td>-----</td> <td>-----</td> <td>78.78</td> <td>27.44</td> <td>8.66 32.60 9.44 110 133 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2403.35	92.30	-----	-----	78.78	27.44	8.66 32.60 9.44 110 133 PEAK
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																											
1	2376.83	51.19	74.00	-22.81	37.84	27.30	8.61 32.58 9.44 110 133 PEAK																																																											
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																											
1	2403.35	92.30	-----	-----	78.78	27.44	8.66 32.60 9.44 110 133 PEAK																																																											
Avg	<p>Site : 03CH22-HY Condition: AVG_BE_54 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.34</td> <td>39.84</td> <td>54.00</td> <td>-14.16</td> <td>26.39</td> <td>27.39</td> <td>8.63 32.59 9.44 110 133 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.34	39.84	54.00	-14.16	26.39	27.39	8.63 32.59 9.44 110 133 AVERAGE	<p>Site : 03CH22-HY Condition: AVG_54 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2403.35</td> <td>91.96</td> <td>-----</td> <td>-----</td> <td>78.44</td> <td>27.44</td> <td>8.66 32.60 9.44 110 133 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2403.35	91.96	-----	-----	78.44	27.44	8.66 32.60 9.44 110 133 AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																											
1	2389.34	39.84	54.00	-14.16	26.39	27.39	8.63 32.59 9.44 110 133 AVERAGE																																																											
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																											
1	2403.35	91.96	-----	-----	78.44	27.44	8.66 32.60 9.44 110 133 AVERAGE																																																											





Mode	13																																																																	
	Harmonic																																																																	
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH01_2403.35MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal	Vertical																																																																
Peak Avg	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4806.70</td> <td>46.14</td> <td>74.00</td> <td>-27.86</td> <td>32.81</td> <td>32.33</td> <td>12.43</td> <td>33.67</td> <td>1.41</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	4806.70	46.14	74.00	-27.86	32.81	32.33	12.43	33.67	1.41	--	PEAK	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4806.70</td> <td>46.06</td> <td>74.00</td> <td>-27.94</td> <td>32.73</td> <td>32.33</td> <td>12.43</td> <td>33.67</td> <td>1.41</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	4806.70	46.06	74.00	-27.94	32.73	32.33	12.43	33.67	1.41	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																								
1	4806.70	46.14	74.00	-27.86	32.81	32.33	12.43	33.67	1.41	--	PEAK																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																								
1	4806.70	46.06	74.00	-27.94	32.73	32.33	12.43	33.67	1.41	--	PEAK																																																							

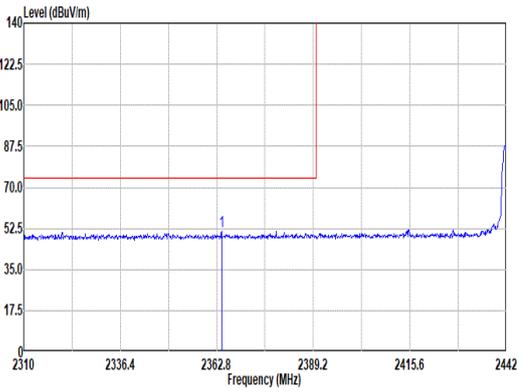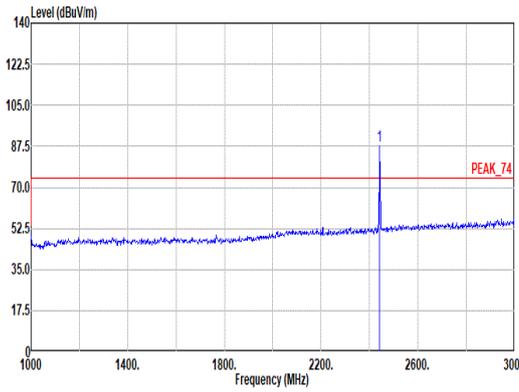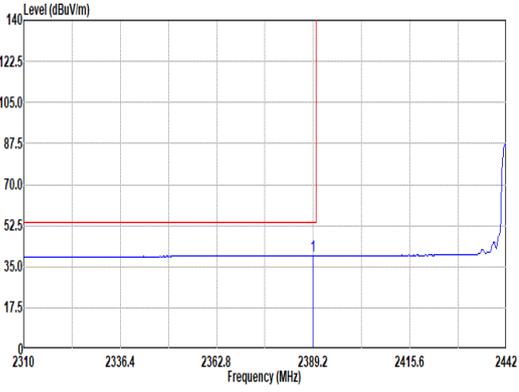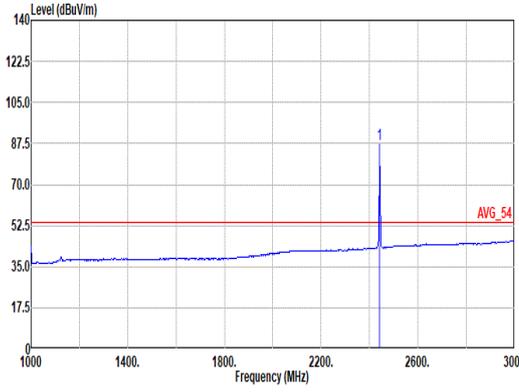

Mode	14																																																																															
	Band Edge - L																																																																															
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH19_2441.35MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	 <p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2364.12</td> <td>51.41</td> <td>74.00</td> <td>-22.59</td> <td>38.10</td> <td>27.30</td> <td>8.58</td> <td>32.57</td> <td>9.43</td> <td>319</td> <td>44 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2364.12	51.41	74.00	-22.59	38.10	27.30	8.58	32.57	9.43	319	44 PEAK	 <p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2441.35</td> <td>87.60</td> <td>-----</td> <td>-----</td> <td>73.86</td> <td>27.60</td> <td>8.73</td> <td>32.62</td> <td>9.45</td> <td>319</td> <td>44 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2441.35	87.60	-----	-----	73.86	27.60	8.73	32.62	9.45	319	44 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2364.12	51.41	74.00	-22.59	38.10	27.30	8.58	32.57	9.43	319	44 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2441.35	87.60	-----	-----	73.86	27.60	8.73	32.62	9.45	319	44 PEAK																																																																						
Avg	 <p>Site : 03CH22-HY Condition: AVG_BE_54 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2389.20</td> <td>39.67</td> <td>54.00</td> <td>-14.33</td> <td>26.22</td> <td>27.39</td> <td>8.63</td> <td>32.59</td> <td>9.44</td> <td>319</td> <td>44 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.20	39.67	54.00	-14.33	26.22	27.39	8.63	32.59	9.44	319	44 AVERAGE	 <p>Site : 03CH22-HY Condition: AVG_54 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2441.35</td> <td>87.35</td> <td>-----</td> <td>-----</td> <td>73.61</td> <td>27.60</td> <td>8.73</td> <td>32.62</td> <td>9.45</td> <td>319</td> <td>44 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2441.35	87.35	-----	-----	73.61	27.60	8.73	32.62	9.45	319	44 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2389.20	39.67	54.00	-14.33	26.22	27.39	8.63	32.59	9.44	319	44 AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2441.35	87.35	-----	-----	73.61	27.60	8.73	32.62	9.45	319	44 AVERAGE																																																																						

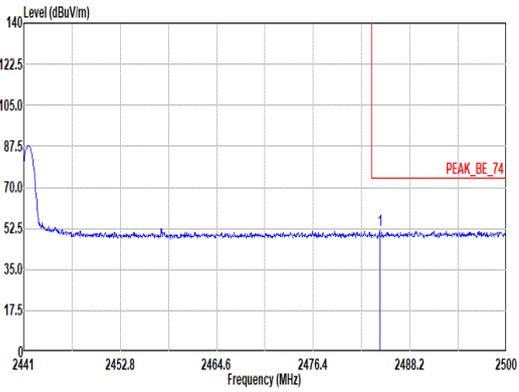
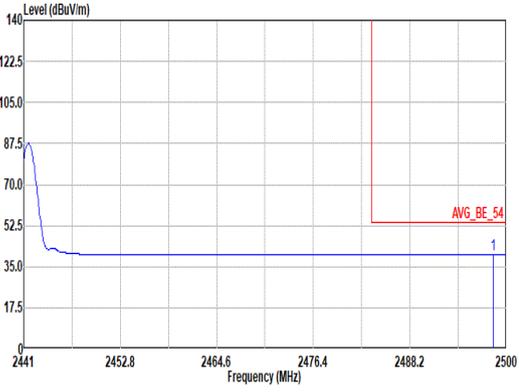


	14																																														
Mode	Band Edge - R																																														
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH19_2441.35MHz																																														
ANT	1																																														
Pol.	Horizontal	Fundamental																																													
Peak	 <p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2484.54</td> <td>51.72</td> <td>74.00</td> <td>-22.28</td> <td>37.77</td> <td>27.75</td> <td>8.81</td> <td>32.65</td> <td>9.46</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>319 44 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2484.54	51.72	74.00	-22.28	37.77	27.75	8.81	32.65	9.46									319 44 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 2484.54	51.72	74.00	-22.28	37.77	27.75	8.81	32.65	9.46																																							
								319 44 PEAK																																							
Avg	 <p>Site : 03CH22-HY Condition: AVG_BE_54 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2498.41</td> <td>40.39</td> <td>54.00</td> <td>-13.61</td> <td>26.38</td> <td>27.80</td> <td>8.83</td> <td>32.66</td> <td>9.46</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>319 44 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2498.41	40.39	54.00	-13.61	26.38	27.80	8.83	32.66	9.46									319 44 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 2498.41	40.39	54.00	-13.61	26.38	27.80	8.83	32.66	9.46																																							
								319 44 AVERAGE																																							



Mode	14																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH19_2441.35MHz																																																																																	
ANT	1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2350.66</td> <td>51.27</td> <td>74.00</td> <td>-22.73</td> <td>37.97</td> <td>27.30</td> <td>8.56</td> <td>32.56</td> <td>9.43</td> <td>100</td> <td>212</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2350.66	51.27	74.00	-22.73	37.97	27.30	8.56	32.56	9.43	100	212	PEAK	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2441.35</td> <td>92.46</td> <td>-----</td> <td>-----</td> <td>78.72</td> <td>27.60</td> <td>8.73</td> <td>32.62</td> <td>9.45</td> <td>100</td> <td>212</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2441.35	92.46	-----	-----	78.72	27.60	8.73	32.62	9.45	100	212	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2350.66	51.27	74.00	-22.73	37.97	27.30	8.56	32.56	9.43	100	212	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2441.35	92.46	-----	-----	78.72	27.60	8.73	32.62	9.45	100	212	PEAK																																																																						
Avg	<p>Site : 03CH22-HY Condition: AVG_BE_54 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.86</td> <td>40.04</td> <td>54.00</td> <td>-13.96</td> <td>26.58</td> <td>27.40</td> <td>8.63</td> <td>32.59</td> <td>9.44</td> <td>100</td> <td>212</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2389.86	40.04	54.00	-13.96	26.58	27.40	8.63	32.59	9.44	100	212	AVERAGE	<p>Site : 03CH22-HY Condition: AVG_54 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2441.35</td> <td>92.09</td> <td>-----</td> <td>-----</td> <td>78.35</td> <td>27.60</td> <td>8.73</td> <td>32.62</td> <td>9.45</td> <td>100</td> <td>212</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2441.35	92.09	-----	-----	78.35	27.60	8.73	32.62	9.45	100	212	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2389.86	40.04	54.00	-13.96	26.58	27.40	8.63	32.59	9.44	100	212	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2441.35	92.09	-----	-----	78.35	27.60	8.73	32.62	9.45	100	212	AVERAGE																																																																						

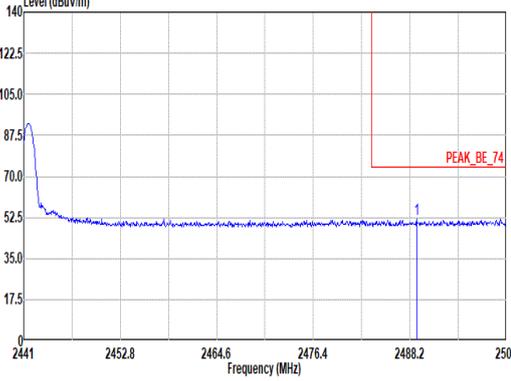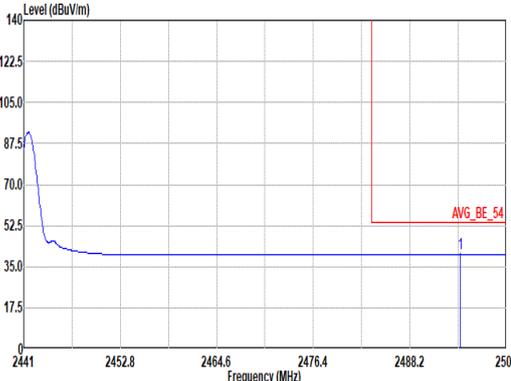

	14																																														
Mode	Band Edge - R																																														
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH19_2441.35MHz																																														
ANT	1																																														
Pol.	Vertical	Fundamental																																													
Peak	 <p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2489.03</td> <td>51.80</td> <td>74.00</td> <td>-22.20</td> <td>37.81</td> <td>27.79</td> <td>8.81</td> <td>32.65</td> <td>9.46</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 212 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2489.03	51.80	74.00	-22.20	37.81	27.79	8.81	32.65	9.46									100 212 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 2489.03	51.80	74.00	-22.20	37.81	27.79	8.81	32.65	9.46																																							
								100 212 PEAK																																							
Avg	 <p>Site : 03CH22-HY Condition: AVG_BE_54 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 2494.40</td> <td>40.42</td> <td>54.00</td> <td>-13.58</td> <td>26.42</td> <td>27.80</td> <td>8.82</td> <td>32.66</td> <td>9.46</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 212 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2494.40	40.42	54.00	-13.58	26.42	27.80	8.82	32.66	9.46									100 212 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 2494.40	40.42	54.00	-13.58	26.42	27.80	8.82	32.66	9.46																																							
								100 212 AVERAGE																																							



Mode	14																																																																																																																																			
	Harmonic																																																																																																																																			
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH19_2441.35MHz																																																																																																																																			
ANT	1																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																		
Peak Avg	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.70</td> <td>46.87</td> <td>74.00</td> <td>-27.13</td> <td>33.43</td> <td>32.57</td> <td>12.49</td> <td>33.67</td> <td>1.24</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7324.05</td> <td>50.48</td> <td>74.00</td> <td>-23.52</td> <td>32.92</td> <td>36.70</td> <td>15.41</td> <td>36.61</td> <td>1.01</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7324.05</td> <td>39.93</td> <td>54.00</td> <td>-14.07</td> <td>22.37</td> <td>36.70</td> <td>15.41</td> <td>36.61</td> <td>1.01</td> <td>--</td> <td>--</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4882.70	46.87	74.00	-27.13	33.43	32.57	12.49	33.67	1.24	--	--	PEAK	2	7324.05	50.48	74.00	-23.52	32.92	36.70	15.41	36.61	1.01	--	--	PEAK	3	7324.05	39.93	54.00	-14.07	22.37	36.70	15.41	36.61	1.01	--	--	AVERAGE	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.70</td> <td>46.53</td> <td>74.00</td> <td>-27.47</td> <td>33.09</td> <td>32.57</td> <td>12.49</td> <td>33.67</td> <td>1.24</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7324.05</td> <td>49.96</td> <td>74.00</td> <td>-24.04</td> <td>32.40</td> <td>36.70</td> <td>15.41</td> <td>36.61</td> <td>1.01</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7324.05</td> <td>39.67</td> <td>54.00</td> <td>-14.33</td> <td>22.11</td> <td>36.70</td> <td>15.41</td> <td>36.61</td> <td>1.01</td> <td>--</td> <td>--</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4882.70	46.53	74.00	-27.47	33.09	32.57	12.49	33.67	1.24	--	--	PEAK	2	7324.05	49.96	74.00	-24.04	32.40	36.70	15.41	36.61	1.01	--	--	PEAK	3	7324.05	39.67	54.00	-14.33	22.11	36.70	15.41	36.61	1.01	--	--	AVERAGE
	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	4882.70	46.87	74.00	-27.13	33.43	32.57	12.49	33.67	1.24	--	--	PEAK																																																																																																																								
2	7324.05	50.48	74.00	-23.52	32.92	36.70	15.41	36.61	1.01	--	--	PEAK																																																																																																																								
3	7324.05	39.93	54.00	-14.07	22.37	36.70	15.41	36.61	1.01	--	--	AVERAGE																																																																																																																								
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	4882.70	46.53	74.00	-27.47	33.09	32.57	12.49	33.67	1.24	--	--	PEAK																																																																																																																								
2	7324.05	49.96	74.00	-24.04	32.40	36.70	15.41	36.61	1.01	--	--	PEAK																																																																																																																								
3	7324.05	39.67	54.00	-14.33	22.11	36.70	15.41	36.61	1.01	--	--	AVERAGE																																																																																																																								



Mode	15																																																																											
	Band Edge																																																																											
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH37_2477.35MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	<p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2498.73</td> <td>52.22</td> <td>74.00</td> <td>-21.78</td> <td>38.21</td> <td>27.80</td> <td>8.83</td> <td>32.66</td> <td>9.46</td> <td>300</td> <td>236</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2498.73	52.22	74.00	-21.78	38.21	27.80	8.83	32.66	9.46	300	236	PEAK	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2477.35</td> <td>90.16</td> <td>-----</td> <td>-----</td> <td>76.30</td> <td>27.68</td> <td>8.79</td> <td>32.65</td> <td>9.46</td> <td>300</td> <td>236</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2477.35	90.16	-----	-----	76.30	27.68	8.79	32.65	9.46	300	236	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2498.73	52.22	74.00	-21.78	38.21	27.80	8.83	32.66	9.46	300	236	PEAK																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2477.35	90.16	-----	-----	76.30	27.68	8.79	32.65	9.46	300	236	PEAK																																																																
Avg	<p>Site : 03CH22-HY Condition: AVG_BE_54 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>40.93</td> <td>54.00</td> <td>-13.07</td> <td>27.00</td> <td>27.74</td> <td>8.80</td> <td>32.65</td> <td>9.46</td> <td>300</td> <td>236</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.51	40.93	54.00	-13.07	27.00	27.74	8.80	32.65	9.46	300	236	AVERAGE	<p>Site : 03CH22-HY Condition: AVG_54 3m 91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2477.35</td> <td>87.74</td> <td>-----</td> <td>-----</td> <td>73.88</td> <td>27.68</td> <td>8.79</td> <td>32.65</td> <td>9.46</td> <td>300</td> <td>236</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2477.35	87.74	-----	-----	73.88	27.68	8.79	32.65	9.46	300	236	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2483.51	40.93	54.00	-13.07	27.00	27.74	8.80	32.65	9.46	300	236	AVERAGE																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2477.35	87.74	-----	-----	73.88	27.68	8.79	32.65	9.46	300	236	AVERAGE																																																																



Mode	15																																																															
	Band Edge																																																															
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH37_2477.35MHz																																																															
ANT	1																																																															
Pol.	Vertical	Fundamental																																																														
Peak	<p>Site : 03CH22-HY Condition: PEAK_BE_74 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.06</td> <td>52.12</td> <td>74.00</td> <td>-21.88</td> <td>38.16</td> <td>27.76</td> <td>8.81</td> <td>32.65</td> <td>9.46</td> <td>142</td> <td>6 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2486.06	52.12	74.00	-21.88	38.16	27.76	8.81	32.65	9.46	142	6 PEAK	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2477.35</td> <td>92.85</td> <td>-----</td> <td>-----</td> <td>78.99</td> <td>27.68</td> <td>8.79</td> <td>32.65</td> <td>9.46</td> <td>142</td> <td>6 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2477.35	92.85	-----	-----	78.99	27.68	8.79	32.65	9.46	142	6 PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																						
1	2486.06	52.12	74.00	-21.88	38.16	27.76	8.81	32.65	9.46	142	6 PEAK																																																					
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																						
1	2477.35	92.85	-----	-----	78.99	27.68	8.79	32.65	9.46	142	6 PEAK																																																					
Avg	<p>Site : 03CH22-HY Condition: AVG_BE_54 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>41.43</td> <td>54.00</td> <td>-12.57</td> <td>27.50</td> <td>27.74</td> <td>8.80</td> <td>32.65</td> <td>9.46</td> <td>142</td> <td>6 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2483.51	41.43	54.00	-12.57	27.50	27.74	8.80	32.65	9.46	142	6 AVERAGE	<p>Site : 03CH22-HY Condition: AVG_54 3m 91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2477.35</td> <td>90.33</td> <td>-----</td> <td>-----</td> <td>76.47</td> <td>27.68</td> <td>8.79</td> <td>32.65</td> <td>9.46</td> <td>142</td> <td>6 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2477.35	90.33	-----	-----	76.47	27.68	8.79	32.65	9.46	142	6 AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																						
1	2483.51	41.43	54.00	-12.57	27.50	27.74	8.80	32.65	9.46	142	6 AVERAGE																																																					
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																						
1	2477.35	90.33	-----	-----	76.47	27.68	8.79	32.65	9.46	142	6 AVERAGE																																																					



Mode	15																																																																																																																																							
	Harmonic																																																																																																																																							
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH37_2477.35MHz																																																																																																																																							
ANT	1																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4954.70</td> <td>47.14</td> <td>74.00</td> <td>-26.86</td> <td>33.44</td> <td>32.94</td> <td>12.56</td> <td>33.67</td> <td>1.09</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7432.05</td> <td>49.43</td> <td>74.00</td> <td>-24.57</td> <td>32.28</td> <td>36.30</td> <td>15.54</td> <td>36.78</td> <td>1.03</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7432.05</td> <td>38.66</td> <td>54.00</td> <td>-15.34</td> <td>21.51</td> <td>36.30</td> <td>15.54</td> <td>36.78</td> <td>1.03</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4954.70	47.14	74.00	-26.86	33.44	32.94	12.56	33.67	1.09	--	--	PEAK	2	7432.05	49.43	74.00	-24.57	32.28	36.30	15.54	36.78	1.03	--	--	PEAK	3	7432.05	38.66	54.00	-15.34	21.51	36.30	15.54	36.78	1.03	--	--	Average	<p>Site : 03CH22-HY Condition: PEAK_74 3m 91200_02038_240729 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4954.70</td> <td>47.16</td> <td>74.00</td> <td>-26.84</td> <td>33.46</td> <td>32.94</td> <td>12.56</td> <td>33.67</td> <td>1.09</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7432.05</td> <td>49.18</td> <td>74.00</td> <td>-24.82</td> <td>32.03</td> <td>36.30</td> <td>15.54</td> <td>36.78</td> <td>1.03</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7432.05</td> <td>38.49</td> <td>54.00</td> <td>-15.51</td> <td>21.34</td> <td>36.30</td> <td>15.54</td> <td>36.78</td> <td>1.03</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4954.70	47.16	74.00	-26.84	33.46	32.94	12.56	33.67	1.09	--	--	PEAK	2	7432.05	49.18	74.00	-24.82	32.03	36.30	15.54	36.78	1.03	--	--	PEAK	3	7432.05	38.49	54.00	-15.51	21.34	36.30	15.54	36.78	1.03	--	--	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	4954.70	47.14	74.00	-26.86	33.44	32.94	12.56	33.67	1.09	--	--	PEAK																																																																																																																												
2	7432.05	49.43	74.00	-24.57	32.28	36.30	15.54	36.78	1.03	--	--	PEAK																																																																																																																												
3	7432.05	38.66	54.00	-15.34	21.51	36.30	15.54	36.78	1.03	--	--	Average																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	4954.70	47.16	74.00	-26.84	33.46	32.94	12.56	33.67	1.09	--	--	PEAK																																																																																																																												
2	7432.05	49.18	74.00	-24.82	32.03	36.30	15.54	36.78	1.03	--	--	PEAK																																																																																																																												
3	7432.05	38.49	54.00	-15.51	21.34	36.30	15.54	36.78	1.03	--	--	Average																																																																																																																												



Mode	16																																																																																																																																																																																																																	
	LF																																																																																																																																																																																																																	
	2400-2483.5_SRD 2.4G pi/4-DQPSK_CH37_2477.35MHz																																																																																																																																																																																																																	
ANT	1																																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																																
QP/ Peak	<p>Site : 03CH22-HY Condition: QP 3m Bilog_63304_241217 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>30.97</td> <td>23.92</td> <td>40.00</td> <td>-16.08</td> <td>31.15</td> <td>24.43</td> <td>0.98</td> <td>32.67</td> <td>0.03</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>212.36</td> <td>28.83</td> <td>43.50</td> <td>-14.67</td> <td>43.77</td> <td>15.06</td> <td>2.58</td> <td>32.62</td> <td>0.04</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>229.82</td> <td>29.36</td> <td>46.00</td> <td>-16.64</td> <td>43.16</td> <td>16.09</td> <td>2.68</td> <td>32.62</td> <td>0.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>499.48</td> <td>33.68</td> <td>46.00</td> <td>-12.32</td> <td>38.42</td> <td>23.90</td> <td>3.94</td> <td>32.80</td> <td>0.22</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>754.59</td> <td>30.91</td> <td>46.00</td> <td>-15.09</td> <td>30.24</td> <td>28.30</td> <td>4.84</td> <td>32.60</td> <td>0.13</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>959.26</td> <td>34.37</td> <td>46.00</td> <td>-11.63</td> <td>28.47</td> <td>31.50</td> <td>5.44</td> <td>31.25</td> <td>0.21</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	30.97	23.92	40.00	-16.08	31.15	24.43	0.98	32.67	0.03	--	--	Peak	2	212.36	28.83	43.50	-14.67	43.77	15.06	2.58	32.62	0.04	--	--	Peak	3	229.82	29.36	46.00	-16.64	43.16	16.09	2.68	32.62	0.05	--	--	Peak	4	499.48	33.68	46.00	-12.32	38.42	23.90	3.94	32.80	0.22	--	--	Peak	5	754.59	30.91	46.00	-15.09	30.24	28.30	4.84	32.60	0.13	--	--	Peak	6	959.26	34.37	46.00	-11.63	28.47	31.50	5.44	31.25	0.21	--	--	Peak	<p>Site : 03CH22-HY Condition: QP 3m Bilog_63304_241217 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>30.97</td> <td>30.17</td> <td>40.00</td> <td>-9.83</td> <td>37.40</td> <td>24.43</td> <td>0.98</td> <td>32.67</td> <td>0.03</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>196.84</td> <td>29.53</td> <td>43.50</td> <td>-13.97</td> <td>44.73</td> <td>14.90</td> <td>2.48</td> <td>32.62</td> <td>0.04</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>259.89</td> <td>28.27</td> <td>46.00</td> <td>-17.73</td> <td>37.80</td> <td>20.18</td> <td>2.86</td> <td>32.62</td> <td>0.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>499.48</td> <td>31.83</td> <td>46.00</td> <td>-14.17</td> <td>36.57</td> <td>23.90</td> <td>3.94</td> <td>32.80</td> <td>0.22</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>619.76</td> <td>33.12</td> <td>46.00</td> <td>-12.88</td> <td>35.56</td> <td>25.80</td> <td>4.42</td> <td>32.77</td> <td>0.11</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>948.59</td> <td>36.28</td> <td>46.00</td> <td>-9.72</td> <td>30.90</td> <td>31.12</td> <td>5.41</td> <td>31.35</td> <td>0.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	30.97	30.17	40.00	-9.83	37.40	24.43	0.98	32.67	0.03	--	--	Peak	2	196.84	29.53	43.50	-13.97	44.73	14.90	2.48	32.62	0.04	--	--	Peak	3	259.89	28.27	46.00	-17.73	37.80	20.18	2.86	32.62	0.05	--	--	Peak	4	499.48	31.83	46.00	-14.17	36.57	23.90	3.94	32.80	0.22	--	--	Peak	5	619.76	33.12	46.00	-12.88	35.56	25.80	4.42	32.77	0.11	--	--	Peak	6	948.59	36.28	46.00	-9.72	30.90	31.12	5.41	31.35	0.20	--	--	Peak
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																							
1	30.97	23.92	40.00	-16.08	31.15	24.43	0.98	32.67	0.03	--	--	Peak																																																																																																																																																																																																						
2	212.36	28.83	43.50	-14.67	43.77	15.06	2.58	32.62	0.04	--	--	Peak																																																																																																																																																																																																						
3	229.82	29.36	46.00	-16.64	43.16	16.09	2.68	32.62	0.05	--	--	Peak																																																																																																																																																																																																						
4	499.48	33.68	46.00	-12.32	38.42	23.90	3.94	32.80	0.22	--	--	Peak																																																																																																																																																																																																						
5	754.59	30.91	46.00	-15.09	30.24	28.30	4.84	32.60	0.13	--	--	Peak																																																																																																																																																																																																						
6	959.26	34.37	46.00	-11.63	28.47	31.50	5.44	31.25	0.21	--	--	Peak																																																																																																																																																																																																						
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																							
1	30.97	30.17	40.00	-9.83	37.40	24.43	0.98	32.67	0.03	--	--	Peak																																																																																																																																																																																																						
2	196.84	29.53	43.50	-13.97	44.73	14.90	2.48	32.62	0.04	--	--	Peak																																																																																																																																																																																																						
3	259.89	28.27	46.00	-17.73	37.80	20.18	2.86	32.62	0.05	--	--	Peak																																																																																																																																																																																																						
4	499.48	31.83	46.00	-14.17	36.57	23.90	3.94	32.80	0.22	--	--	Peak																																																																																																																																																																																																						
5	619.76	33.12	46.00	-12.88	35.56	25.80	4.42	32.77	0.11	--	--	Peak																																																																																																																																																																																																						
6	948.59	36.28	46.00	-9.72	30.90	31.12	5.41	31.35	0.20	--	--	Peak																																																																																																																																																																																																						



Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
0	SRD 2.4GHz	100.00	-	-	10Hz
1	SRD 2.4GHz	100.00	-	-	10Hz

