



A D T

# FCC TEST REPORT

**REPORT NO.:** RF980509H01A

**MODEL NO.:** C-U0006

**RECEIVED:** May 11, 2009

**TESTED:** May 12 to 15, 2009

**ISSUED:** Sep. 30, 2009

**APPLICANT:** LOGITECH FAR EAST LTD.

**ADDRESS:** #2 Creation Rd. 4, Science-Based Ind. Park  
Hsinchu Taiwan, R.O.C.

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch

**TEST LOCATION:** No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung  
Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307,  
Taiwan

This test report consists of 29 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced, except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





## Table of Contents

1	CERTIFICATION.....	3
2	SUMMARY OF TEST RESULTS.....	4
2.1	MEASUREMENT UNCERTAINTY .....	4
3	GENERAL INFORMATION .....	5
3.1	GENERAL DESCRIPTION OF EUT.....	5
3.2	DESCRIPTION OF TEST MODES.....	6
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	6
3.4	DESCRIPTION OF SUPPORT UNITS.....	7
3.5	CONFIGURATION OF SYSTEM UNDER TEST .....	7
4	TEST PROCEDURES AND RESULTS .....	8
4.1	CONDUCTED EMISSION MEASUREMENT .....	8
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	8
4.1.2	TEST INSTRUMENTS .....	8
4.1.3	TEST PROCEDURES.....	9
4.1.4	TEST SETUP .....	9
4.1.5	EUT OPERATING CONDITIONS.....	10
4.1.6	TEST RESULTS.....	11
4.2	RADIATED EMISSION MEASUREMENT .....	13
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	13
4.2.2	TEST INSTRUMENTS .....	15
4.2.3	TEST PROCEDURES.....	16
4.2.4	DEVIATION FROM TEST STANDARD .....	16
4.2.5	TEST SETUP .....	17
4.2.6	EUT OPERATING CONDITIONS.....	17
4.2.7	TEST RESULTS.....	18
4.3	CONDUCTED - OUT BAND MEASUREMENT .....	25
4.3.1	LIMITS OF CONDUCTED - OUT BAND MEASUREMENT .....	25
4.3.2	TEST INSTRUMENTS .....	25
4.3.3	TEST PROCEDURE .....	25
4.3.4	DEVIATION FROM TEST STANDARD .....	25
4.3.5	EUT OPERATING CONDITION .....	25
4.3.6	TEST RESULTS.....	26
5	INFORMATION ON THE TESTING LABORATORIES .....	28
6	APPENDIX-A- MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....	29



A D T

# 1 CERTIFICATION

**PRODUCT :** 2.4GHz Transceiver  
**BRAND NAME :** Logitech  
**MODEL NO. :** C-U0006  
**TESTED :** May 12 to 15, 2009  
**TEST SAMPLE :** MASS-PRODUCTION  
**APPLICANT :** LOGITECH FAR EAST LTD.  
**STANDARDS :** 47 CFR Part 15, Subpart C (Section 15.249),  
ANSI C63.4-2003

The above equipment (Model: C-U0006) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :**  , **DATE:** Sep. 30, 2009  
( Claire Kuan, Specialist )

**TECHNICAL ACCEPTANCE :**  , **DATE:** Sep. 30, 2009  
Responsible for RF ( Hank Chung, Deputy Manager )

**APPROVED BY :**  , **DATE:** Sep. 30, 2009  
( May Chen, Deputy Manager )

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Paragraph	Test Type	Result	Remark
15.207	Conducted Emission Test	PASS	Minimum passing margin is -15.25dB at 0.338MHz
15.249	Radiated Emission Test	PASS	Minimum passing margin is -5.39dB at 431.99MHz
15.249	Band Edge Measurement	PASS	Meet the requirement of limit

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Value
Conducted Emission	2.45 dB
Radiated emissions (30MHz-1GHz)	3.94 dB
Radiated emissions (1GHz -18GHz)	2.49 dB
Radiated emissions (18GHz -40GHz)	2.70 dB

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	2.4GHz Transceiver
<b>MODEL NO.</b>	C-U0006
<b>FCC ID</b>	JNZCU0006
<b>POWER SUPPLY</b>	DC 5V from host equipment
<b>MODULATION TYPE</b>	GFSK
<b>CARRIER FREQUENCY OF EACH CHANNEL</b>	2405MHz ~ 2474MHz
<b>NUMBER OF CHANNEL</b>	12
<b>ANTENNA TYPE</b>	PIFA: PCB Printed Inverted F Antenna (Gain: 2.35dBi)
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	NA
<b>ASSOCIATED DEVICES</b>	NA

#### NOTE:

1. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



### 3.2 DESCRIPTION OF TEST MODES

Twelve channels are provided in this EUT.

Channel	Freq. (MHz)						
1	2405	4	2417	7	2441	10	2465
2	2408	5	2432	8	2444	11	2471
3	2414	6	2435	9	2462	12	2474

**NOTE:**

- 1. Below 1 GHz, the channel 1, 8, and 12 were pre-tested in chamber. The channel 12, worst case one, was chosen for final test.
- 2. Above 1 GHz, the channel 1, 8, and 12 were tested individually.

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a 2.4GHz Transceiver. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**47 CFR Part 15, Subpart C (Section 15.249)**  
**ANSI C63.4: 2003**

All tests have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

### 3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP17L	CN-ONF743-48643-7AV-0124	FCC DoC
2	iPod nano 1GB	Apple	A1137	6U6078FMUPR	FCC DoC
3	2.4GHz Cordless Mouse	Logitech	M-R0011	NA	NA

No.	Signal cable description
1	NA
2	1 m shielded cable, terminated with USB connector, w/o core.
3	NA

Note: 1. All power cords of the above support units are unshielded (1.8m).

### 3.5 CONFIGURATION OF SYSTEM UNDER TEST

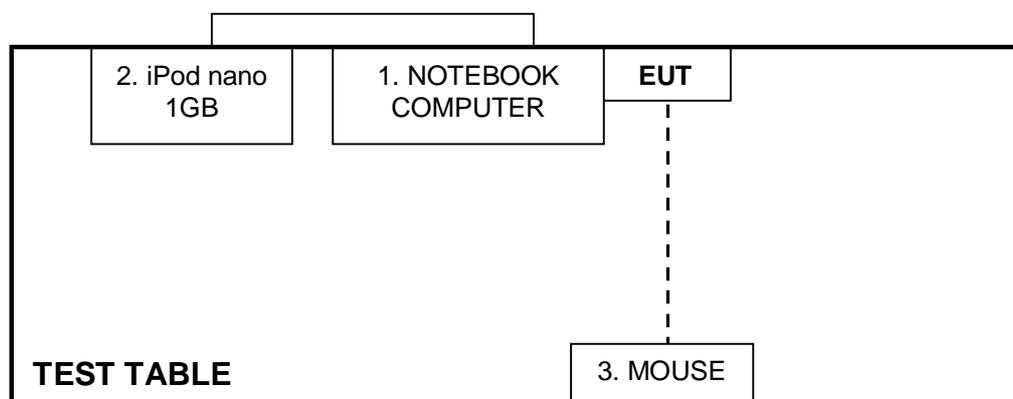



## 4 TEST PROCEDURES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 23, 2009	Mar. 22, 2010
Line-Impedance Stabilization Network (for EUT)	ENV-216	100071	Nov. 26, 2008	Nov. 25, 2009
Line-Impedance Stabilization Network (for Peripheral)	ESH3-Z5	848773/004	Nov. 05, 2008	Nov. 04, 2009
RF Cable (JYEBAO)	5DFB	COBCAB-001	Aug. 15, 2008	Aug. 14, 2009
50 ohms Terminator	50	3	Nov. 05, 2008	Nov. 04, 2009
Software	BV ADT_Cond_V7.3.7	NA	NA	NA


**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. B.
3. The VCCI Con B Registration No. is C-2193.

### 4.1.3 TEST PROCEDURES

- a. The EUT/HOST was placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT/HOST were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

### 4.1.4 TEST SETUP

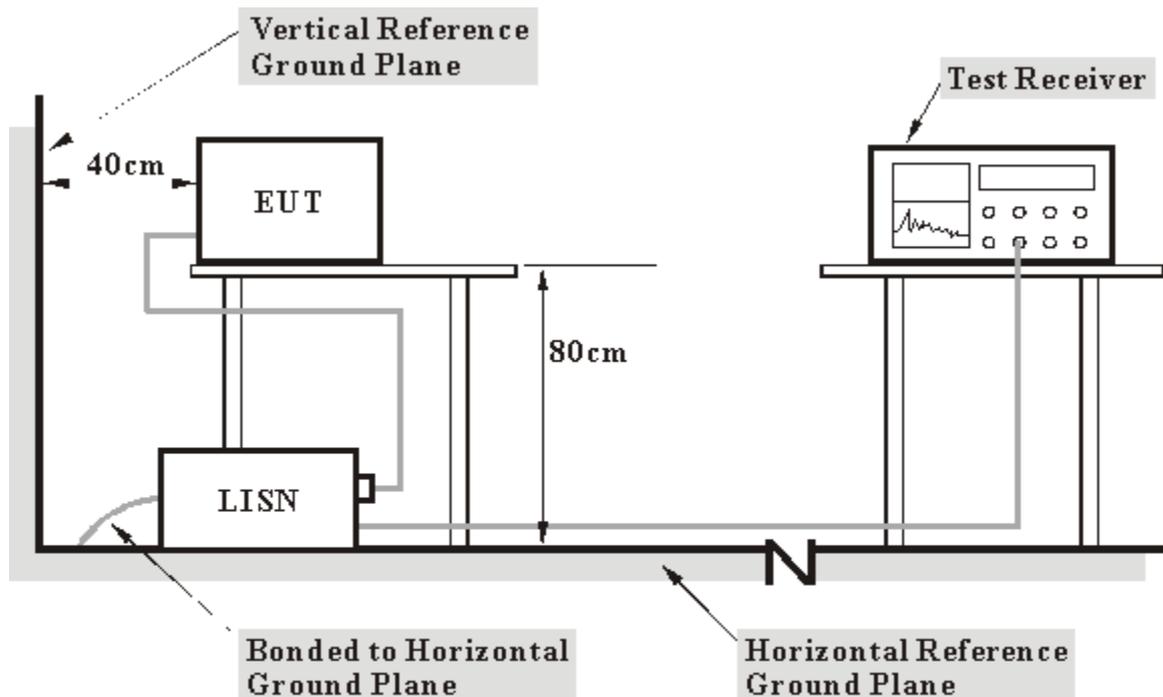

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.5 EUT OPERATING CONDITIONS


- a. Plug the EUT into support unit 1 (Notebook computer) and which placed on a testing table.
- b. The support unit 1 (Notebook computer) ran a test program “TXT Button function” to enable EUT under transmission condition continuously at specific channel frequency.

#### 4.1.6 TEST RESULTS

<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>6DB BANDWIDTH</b>	9 kHz
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 60%RH, 965 hPa	<b>PHASE</b>	Line (L)
<b>TESTED BY</b>	Eric Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.21	40.41	-	40.62	-	64.43	54.43	-23.81	-
2	0.232	0.26	40.17	-	40.43	-	62.38	52.38	-21.95	-
3	0.291	0.33	41.73	-	42.06	-	60.51	50.51	-18.45	-
4	0.982	0.30	25.89	-	26.19	-	56.00	46.00	-29.81	-
5	14.605	1.06	31.84	-	32.90	-	60.00	50.00	-27.10	-
6	23.586	1.65	29.64	-	31.29	-	60.00	50.00	-28.71	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

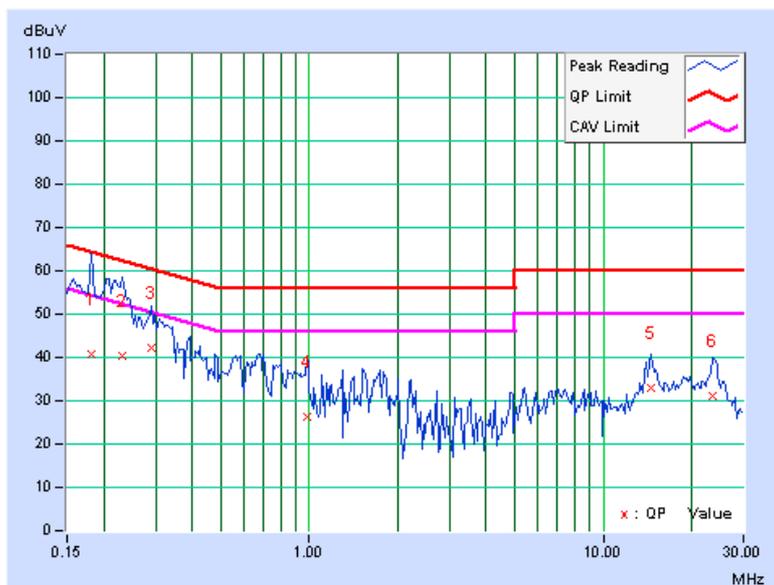

<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>6dB BANDWIDTH</b>	9 kHz
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 60%RH, 965 hPa	<b>PHASE</b>	Neutral (N)
<b>TESTED BY</b>	Eric Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.12	44.03	-	44.15	-	65.79	55.79	-21.63	-
2	0.298	0.27	41.54	-	41.81	-	60.29	50.29	-18.47	-
<b>3</b>	<b>0.338</b>	<b>0.32</b>	<b>43.69</b>	-	<b>44.01</b>	-	<b>59.26</b>	<b>49.26</b>	<b>-15.25</b>	-
4	0.443	0.39	38.10	-	38.49	-	57.01	47.01	-18.52	-
5	1.719	0.29	30.57	-	30.86	-	56.00	46.00	-25.14	-
6	15.129	0.89	30.39	-	31.28	-	60.00	50.00	-28.72	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

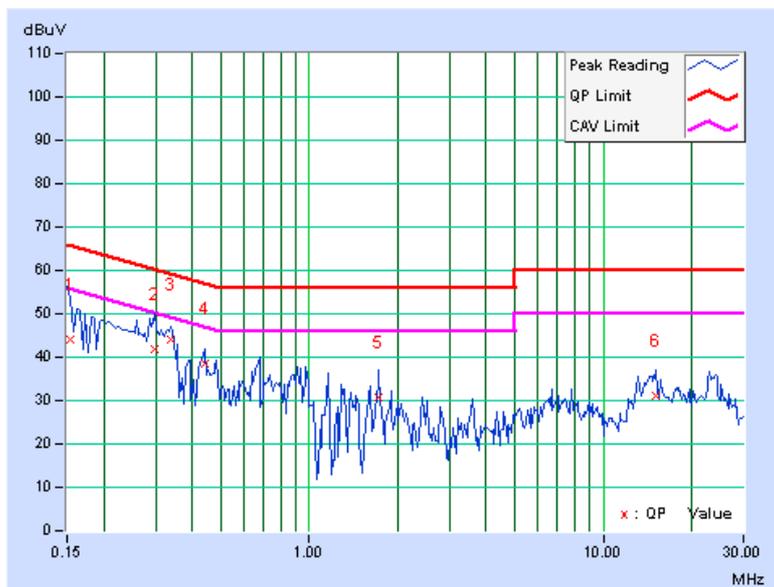

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.249 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
2400 ~ 2483.5	114	94
	Field Strength of Harmonics (dBuV/m)	
	74	54

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.



Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

<b>Frequencies (MHz)</b>	<b>Field strength (microvolts/meter)</b>	<b>Measurement distance (meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



#### 4.2.2 TEST INSTRUMENTS

<b>DESCRIPTION &amp; MANUFACTURER</b>	<b>MODEL NO.</b>	<b>SERIAL NO.</b>	<b>CALIBRATED DATE</b>	<b>CALIBRATED UNTIL</b>
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 09, 2008	Dec. 08, 2009
HP Pre_Amplifier	8449B	3008A01923	Nov. 10, 2008	Nov. 09, 2009
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Sep. 09, 2008	Sep. 08, 2009
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	April 29, 2009	April 28, 2010
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 09, 2008	Dec. 08, 2009
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 22, 2009	Jan. 21, 2010
RF Switches	EMH-011	08009	Oct. 07, 2008	Oct. 06, 2009
RF CABLE (Chaintek)	Sucoflex 106	28077	Aug. 15, 2008	Aug. 14, 2009
RF Cable	8DFB	STCCAB-30M- 1GHz	Oct. 07, 2008	Oct. 06, 2009
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA
CORCOM AC Filter	MRI2030	024/019	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: U3772) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in Open Site No. B.

4. The VCCI Site Registration No. is R-847.

5. The FCC Site Registration No. is 92753.

6. The CANADA Site Registration No. is IC 7450G-2.

#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.5 TEST SETUP

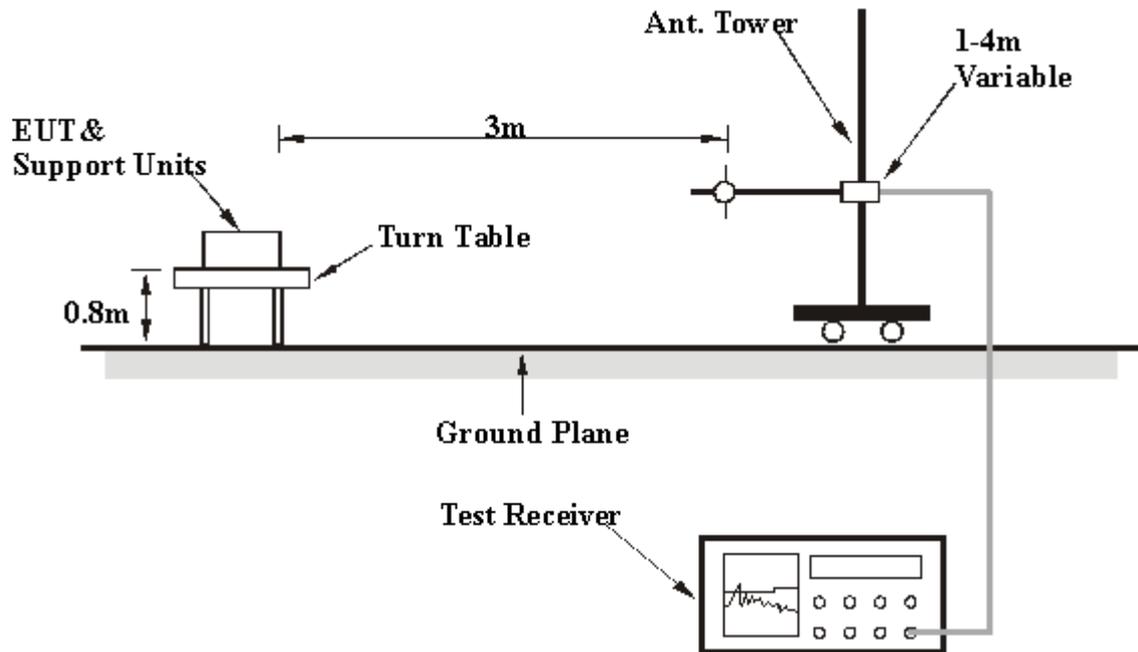

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



## 4.2.7 TEST RESULTS

<b>MODE</b>	Channel 1	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>FREQUENCY RANGE</b>	30-1000 MHz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	28 deg. C, 62%RH, 965 hPa	<b>TESTED BY</b>	Wen Yu

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	192.00	25.57 QP	43.50	-17.93	1.35 H	121	11.97	13.60
2	240.00	25.15 QP	46.00	-20.85	1.00 H	342	10.22	14.93
3	300.00	32.37 QP	46.00	-13.63	1.00 H	141	15.35	17.02
<b>4</b>	<b>431.99</b>	<b>40.61 QP</b>	<b>46.00</b>	<b>-5.39</b>	<b>2.09 H</b>	<b>347</b>	<b>18.99</b>	<b>21.62</b>
5	623.99	31.76 QP	46.00	-14.24	1.41 H	258	6.44	25.32
6	671.99	30.14 QP	46.00	-15.86	1.38 H	68	3.73	26.41
7	720.00	32.98 QP	46.00	-13.02	1.41 H	212	5.37	27.61
8	815.99	33.14 QP	46.00	-12.86	1.33 H	84	3.04	30.10
9	959.99	33.25 QP	46.00	-12.75	1.42 H	0	1.28	31.97

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	119.99	24.14 QP	43.50	-19.36	1.00 V	80	10.31	13.83
2	191.99	24.90 QP	43.50	-18.60	1.00 V	125	11.30	13.60
3	239.99	26.01 QP	46.00	-19.99	1.00 V	97	11.08	14.93
4	299.99	28.48 QP	46.00	-17.52	1.76 V	20	11.46	17.02
5	431.99	39.04 QP	46.00	-6.96	1.00 V	279	17.42	21.62
6	527.99	28.71 QP	46.00	-17.29	1.00 V	204	5.38	23.33
7	623.99	33.73 QP	46.00	-12.27	1.00 V	63	8.41	25.32
8	959.99	33.83 QP	46.00	-12.17	1.00 V	237	1.86	31.97

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



<b>MODE</b>	Channel 1	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>FREQUENCY RANGE</b>	1000~25000MHz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK)
<b>ENVIRONMENTAL CONDITIONS</b>	29 deg. C, 61%RH, 965 hPa	<b>TESTED BY</b>	Frank Liu

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.98 PK	74.00	-19.02	1.28 H	163	24.70	30.28
2	2390.00	42.61 AV	54.00	-11.39	1.28 H	163	12.33	30.28
3	*2405.00	90.60 PK	114.00	-23.40	1.28 H	163	60.26	30.34
4	*2405.00	53.80 AV	94.00	-40.20	1.28 H	163	23.46	30.34
5	4810.00	48.12 PK	74.00	-25.88	1.21 H	219	11.37	36.75
6	4810.00	11.32 AV	54.00	-42.68	1.21 H	219	-25.43	36.75
7	7215.00	51.62 PK	74.00	-22.38	1.57 H	312	8.48	43.14
8	7215.00	14.82 AV	54.00	-39.18	1.57 H	312	-28.32	43.14

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.00	58.69 PK	74.00	-15.31	1.00 V	211	28.41	30.28
2	2388.00	43.22 AV	54.00	-10.78	1.00 V	211	12.94	30.28
3	*2405.00	96.70 PK	114.00	-17.30	1.04 V	193	66.36	30.34
4	*2405.00	59.90 AV	94.00	-34.10	1.04 V	193	29.56	30.34
5	4810.00	48.53 PK	74.00	-25.47	1.01 V	249	11.78	36.75
6	4810.00	11.73 AV	54.00	-42.27	1.01 V	249	-25.02	36.75
7	7215.00	52.61 PK	74.00	-21.39	1.26 V	317	9.47	43.14
8	7215.00	15.81 AV	54.00	-38.19	1.26 V	317	-27.33	43.14

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. Duty cycle = 1.45%
  7. Average value = peak reading + 20log(duty cycle).



<b>MODE</b>	Channel 8	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>FREQUENCY RANGE</b>	1000~25000MHz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK)
<b>ENVIRONMENTAL CONDITIONS</b>	29 deg. C, 61%RH, 965 hPa	<b>TESTED BY</b>	Frank Liu

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2444.00	91.30 PK	114.00	-22.70	1.27 H	159	60.82	30.48
2	*2444.00	54.50 AV	94.00	-39.50	1.27 H	159	24.02	30.48
3	4888.00	48.30 PK	74.00	-25.70	1.24 H	216	11.34	36.96
4	4888.00	11.50 AV	54.00	-42.50	1.24 H	216	-25.46	36.96
5	7332.00	51.84 PK	74.00	-22.16	1.56 H	316	8.71	43.13
6	7332.00	15.04 AV	54.00	-38.96	1.56 H	316	-28.09	43.13

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2444.00	96.30 PK	114.00	-17.70	1.02 V	200	65.82	30.48
2	*2444.00	49.50 AV	94.00	-44.50	1.02 V	200	19.02	30.48
3	4888.00	48.73 PK	74.00	-25.27	1.02 V	284	11.77	36.96
4	4888.00	11.93 AV	54.00	-42.07	1.02 V	284	-25.03	36.96
5	7332.00	52.84 PK	74.00	-21.16	1.24 V	301	9.71	43.13
6	7332.00	16.04 AV	54.00	-37.96	1.24 V	301	-27.09	43.13

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. Duty cycle = 1.45%
  7. Average value = peak reading + 20log(duty cycle).



<b>MODE</b>	Channel 12	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>FREQUENCY RANGE</b>	1000~25000MHz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK)
<b>ENVIRONMENTAL CONDITIONS</b>	29 deg. C, 61%RH, 965 hPa	<b>TESTED BY</b>	Frank Liu


#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2474.00	92.60 PK	114.00	-21.40	1.22 H	170	62.01	30.59
2	*2474.00	55.80 AV	94.00	-38.20	1.22 H	170	25.21	30.59
3	2483.50	56.32 PK	74.00	-17.68	1.22 H	169	25.69	30.63
4	2483.50	42.98 AV	54.00	-11.02	1.22 H	169	12.35	30.63
5	4948.00	48.70 PK	74.00	-25.30	1.27 H	212	11.58	37.12
6	4948.00	11.90 AV	54.00	-42.10	1.27 H	212	-25.22	37.12
7	7422.00	51.96 PK	74.00	-22.04	1.54 H	324	8.83	43.13
8	7422.00	15.16 AV	54.00	-38.84	1.54 H	324	-27.97	43.13

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2474.00	96.20 PK	114.00	-17.80	1.00 V	202	65.61	30.59
2	*2474.00	59.40 AV	94.00	-34.60	1.00 V	202	28.81	30.59
3	2483.50	59.85 PK	74.00	-14.15	1.00 V	184	29.22	30.63
4	2483.50	42.97 AV	54.00	-11.03	1.00 V	184	12.34	30.63
5	4948.00	49.03 PK	74.00	-24.97	1.02 V	293	11.91	37.12
6	4948.00	12.23 AV	54.00	-41.77	1.02 V	293	-24.89	37.12
7	7422.00	53.40 PK	74.00	-20.60	1.28 V	303	10.27	43.13
8	7422.00	16.60 AV	54.00	-37.40	1.28 V	303	-26.53	43.13


- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ”: Fundamental frequency.
  6. Duty cycle = 1.45%
  7. Average value = peak reading + 20log(duty cycle).

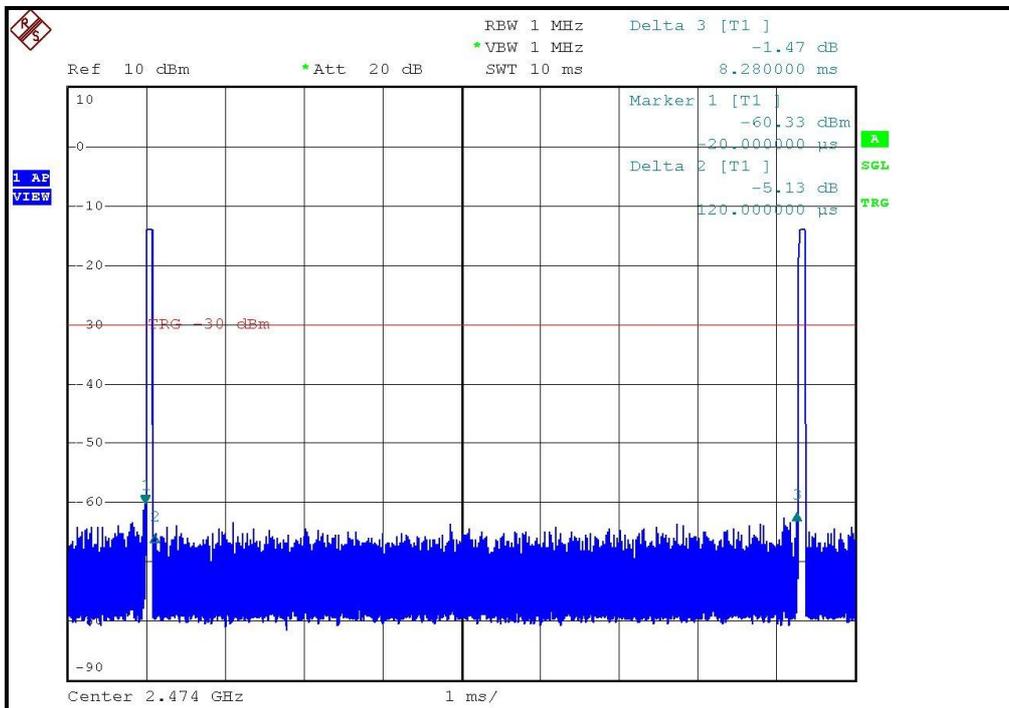


Date: 18.MAY.2009 18:08:32

$$20 \log (\text{Duty cycle}) = 20 \log (0.12 \text{ ms} / 8.28 \text{ ms}) = -36.8 \text{ dB}$$


RESTRICTED BANDEDGE (CH1, HORIZONTAL )

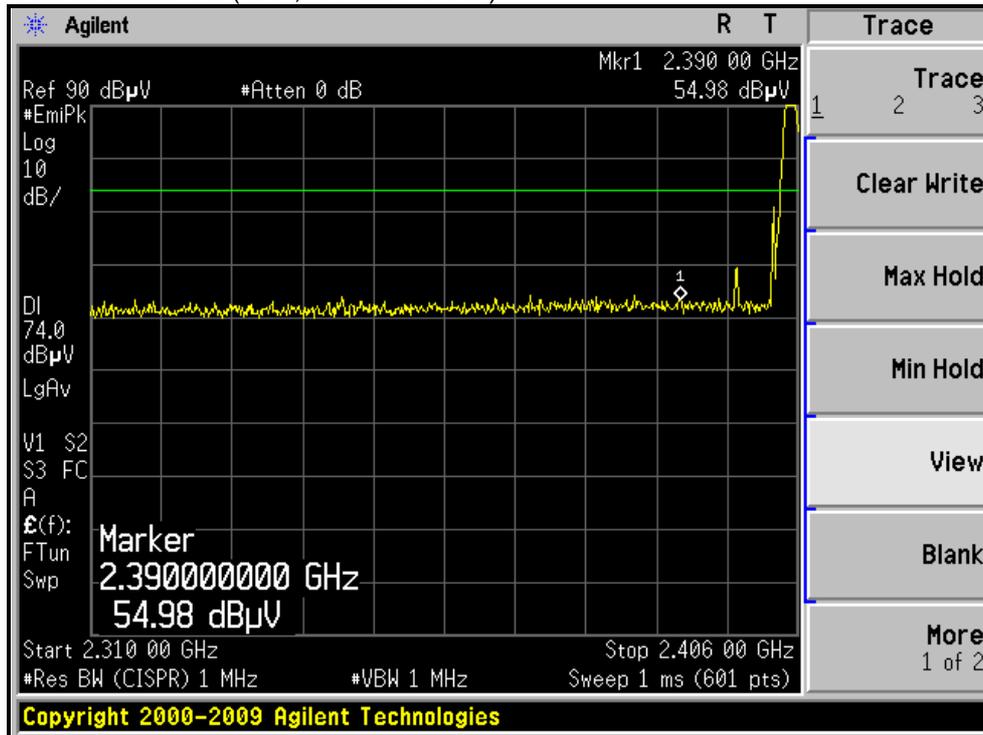


RESTRICTED BANDEDGE (CH1, VERTICAL )

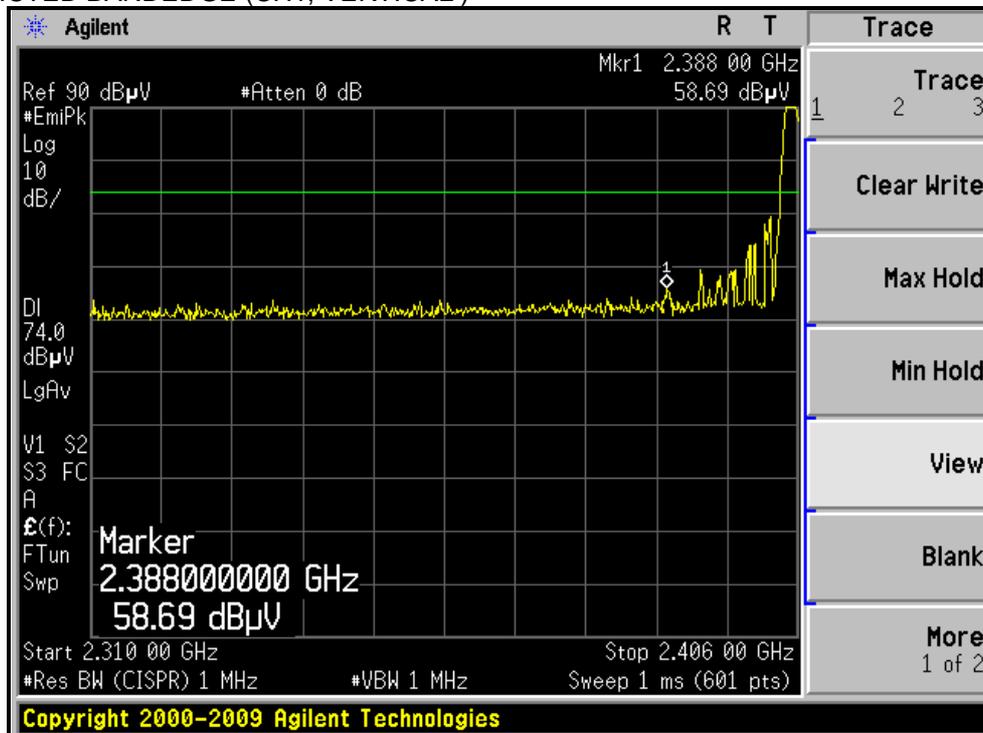

RESTRICTED BANDEDGE (CH12, HORIZONTAL)

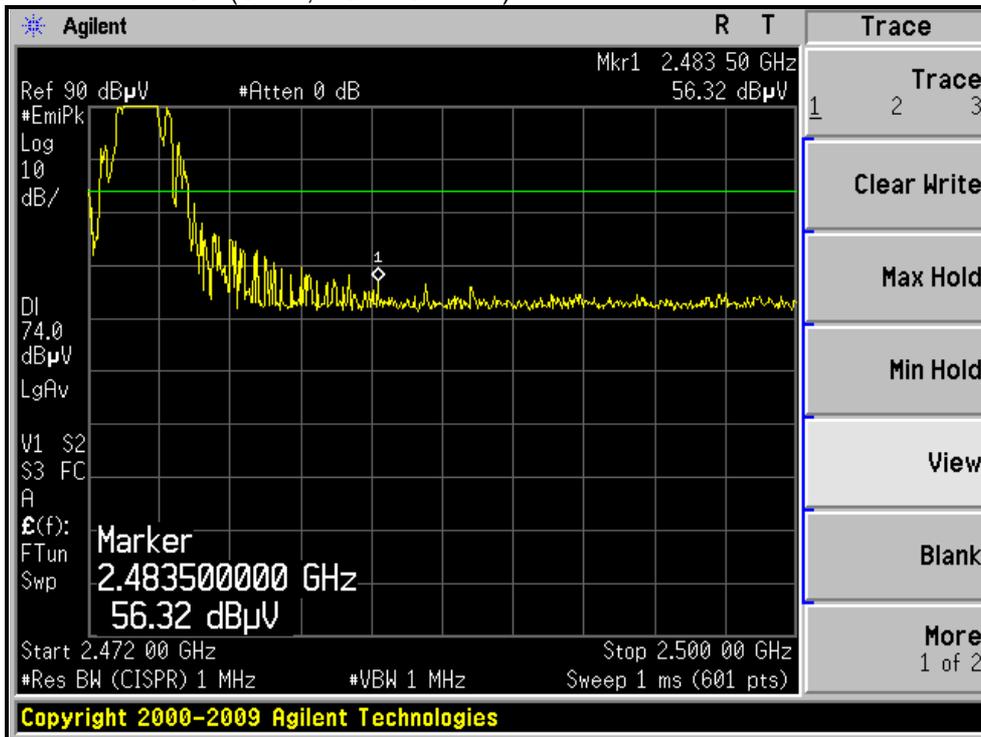

RESTRICTED BANDEDGE (CH12, VERTICAL)

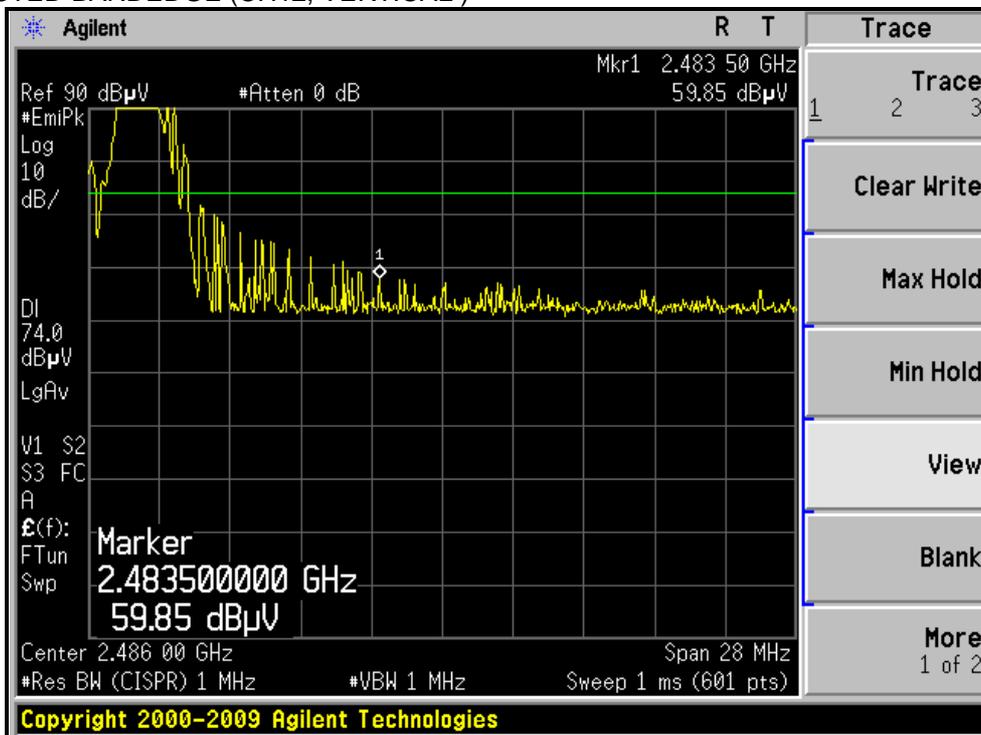



### 4.3 CONDUCTED - OUT BAND MEASUREMENT

#### 4.3.1 LIMITS OF CONDUCTED - OUT BAND MEASUREMENT

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

#### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 09, 2008	Aug. 08, 2009

**NOTE:**

- 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 300 MHz bandwidth from band edge. The band edges was measured and recorded.

#### 4.3.4 DEVIATION FROM TEST STANDARD



No deviation

#### 4.3.5 EUT OPERATING CONDITION



The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

### 4.3.6 TEST RESULTS

Emissions radiated outside of the specified frequency bands, please refer pages form 19 to 21 for met the requirement of the general radiated emission limits in § 15.209. CH1

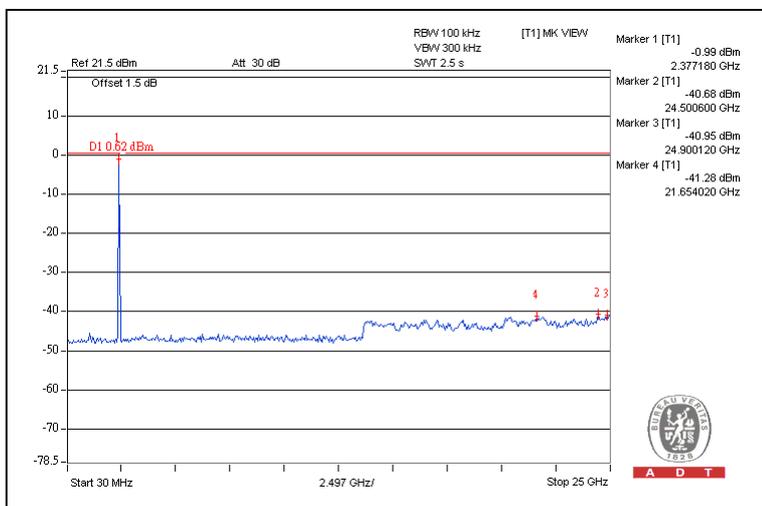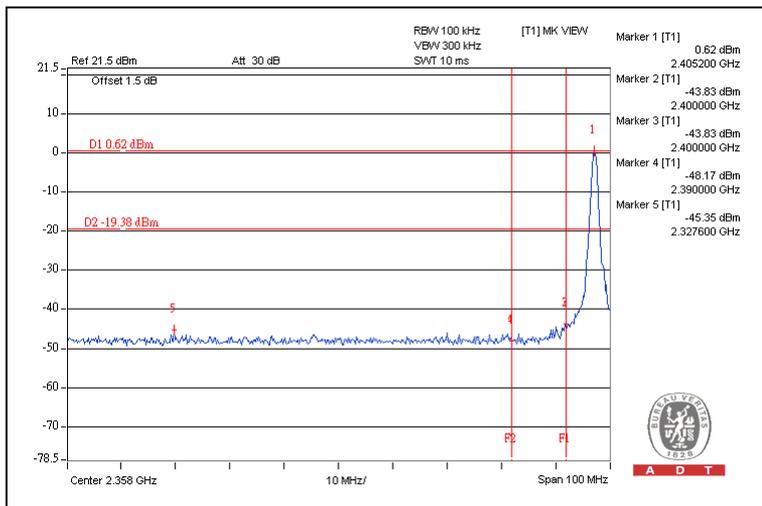

# CH12

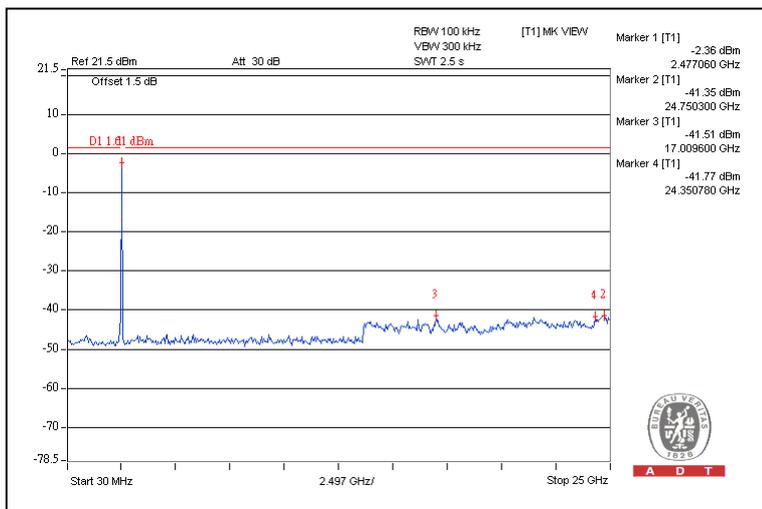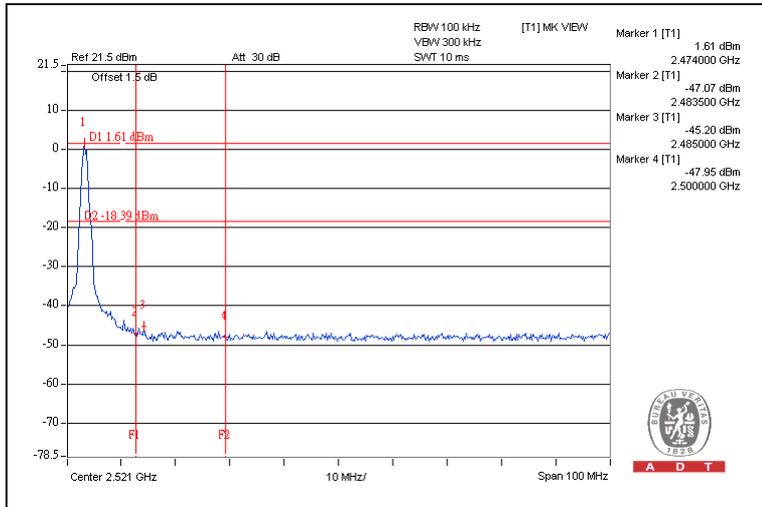



## 5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

<b>USA</b>	FCC, NVLAP
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA, CSA
<b>R.O.C.</b>	TAF, BSMI, NCC
<b>Netherlands</b>	Telefication
<b>Singapore</b>	GOST-ASIA (MOU)
<b>Russia</b>	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).  
If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**  
Tel: 886-2-26052180  
Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab:**  
Tel: 886-3-5935343  
Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**  
Tel: 886-3-3183232  
Fax: 886-3-3185050

**Email:** [service@adt.com.tw](mailto:service@adt.com.tw)  
**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



## **6 APPENDIX-A- MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

**--- END ---**