



A D T

FCC TEST REPORT

REPORT NO.: RF980602H01

MODEL NO.: E-R0005

RECEIVED: June 02, 2009

TESTED: June 06 to 11, 2009

ISSUED: June 16, 2009

APPLICANT: LOGITECH FAR EAST LTD.

ADDRESS: #2 Creation Rd. 4, Science-Based Ind. Park
Hsinchu Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

TEST LOCATION: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung
Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307,
Taiwan

This test report consists of 20 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced, except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





Table of Contents

1	CERTIFICATION	3
2	SUMMARY OF TEST RESULTS	4
2.1	MEASUREMENT UNCERTAINTY	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.2	DESCRIPTION OF TEST MODES	6
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	6
3.4	DESCRIPTION OF SUPPORT UNITS	7
3.5	CONFIGURATION OF SYSTEM UNDER TEST	7
4	TEST PROCEDURES AND RESULTS	8
4.1	RADIATED EMISSION MEASUREMENT	8
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	8
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST PROCEDURES	10
4.1.4	DEVIATION FROM TEST STANDARD	10
4.1.5	TEST SETUP	11
4.1.6	EUT OPERATING CONDITIONS	11
4.1.7	TEST RESULTS	12
4.2	CONDUCTED - OUT BAND MEASUREMENT	16
4.2.1	LIMITS OF CONDUCTED - OUT BAND MEASUREMENT	16
4.2.2	TEST INSTRUMENTS	16
4.2.3	TEST PROCEDURE	16
4.2.4	DEVIATION FROM TEST STANDARD	16
4.2.5	EUT OPERATING CONDITION	16
4.2.6	TEST RESULTS	17
5	INFORMATION ON THE TESTING LABORATORIES	19
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	20



A D T

1 CERTIFICATION

PRODUCT : Cordless Guitar Controller
BRAND NAME : Logitech
MODEL NO. : E-R0005
TESTED : June 06 to 11, 2009
TEST SAMPLE : ENGINEERING SAMPLE
APPLICANT : LOGITECH FAR EAST LTD.
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.249),
ANSI C63.4-2003

The above equipment (Model: E-R0005) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao , **DATE:** June 16, 2009
(Carol Liao, Specialist)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** June 16, 2009
Responsible for RF (Hank Chung, Deputy Manager)

APPROVED BY : May Chen , **DATE:** June 16, 2009
(May Chen, Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Paragraph	Test Type	Result	Remark
15.207	Conducted Emission Test	NA	Not Applicable
15.249	Radiated Emission Test	PASS	Minimum passing margin is -2.10dB at 2442.00MHz
15.249	Conducted out-band Emission Limit: 50 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Radiated emissions (30MHz-1GHz)	3.94 dB
Radiated emissions (1GHz -18GHz)	2.49 dB
Radiated emissions (18GHz -40GHz)	2.70 dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Cordless Guitar Controller
MODEL NO.	E-R0005
FCC ID	JNZER0005
POWER SUPPLY	DC 3V from two AA Alkaline batteries
MODULATION TYPE	GMSK
MODULATION TECHNOLOGY	FHSS
CARRIER FREQUENCY OF EACH CHANNEL	2402MHz ~ 2482MHz
NUMBER OF CHANNEL	41
ANTENNA TYPE	PCB printed antenna without connector (Antenna Gain : -0.14dBi)
DATA CABLE	NA
I/O PORTS	RJ11(Expansion port) x 1 Headset port x 1 (The function is not available now, so this port is not tested)
ASSOCIATED DEVICES	Cordless Transceiver (Brand: Microsoft, Model: 1086)

NOTE:

1. The EUT only has Transmitter function.
2. The EUT was pre-tested under the following test modes:

Test Mode	Description
Mode A	X-Y plane
Mode B	X-Z plane
Mode C	Y-Z plane

From the above modes, the worst radiated emission was found in **Mode C**. Therefore only the test data of the mode was recorded in this report individually.

3. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Forty-one channels are provided to this EUT.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	12	2426	24	2450	36	2474
1	2404	13	2428	25	2452	37	2476
2	2406	14	2430	26	2454	38	2478
3	2408	15	2432	27	2456	39	2480
4	2410	16	2434	28	2458	40	2482
5	2412	17	2436	29	2460		
6	2414	18	2438	30	2462		
7	2416	19	2440	31	2464		
8	2418	20	2442	32	2466		
9	2420	21	2444	33	2468		
10	2422	22	2446	34	2470		
11	2424	23	2448	35	2472		

NOTE:

1. Below 1 GHz, the channel 0, 20, and 40 were pre-tested in chamber. The channel 0, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 0, 20, and 40 were tested individually.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Cordless Guitar Controller. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C (Section 15.249)
ANSI C63.4: 2003

All tests have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP21L	CN-0GD366-70166-5B3-09ZX	QDS-BRCM1016
2	Cordless Transceiver	Microsoft	1086	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

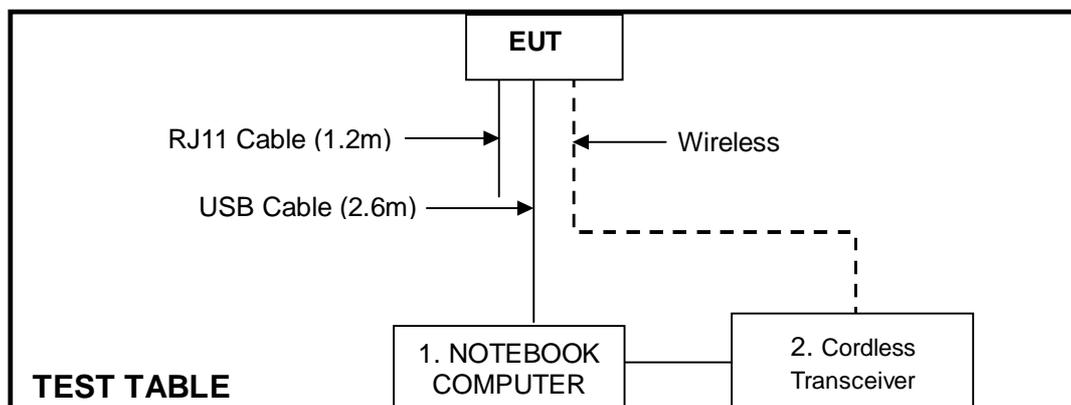

Note: USB connection to PC is for test control purpose and is not for normal use.

4 TEST PROCEDURES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.249 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
2400 ~ 2483.5	114	94
	Field Strength of Harmonics (dBuV/m)	
	74	54

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 9, 2008	Dec. 8, 2009
HP Pre_Amplifier	8449B	3008A01923	Nov. 10, 2008	Nov. 9, 2009
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Sep. 9, 2008	Sep. 8, 2009
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	April 29, 2009	April 28, 2010
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 09, 2008	Dec. 08, 2009
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 22, 2009	Jan. 21, 2010
RF Switches	EMH-011	08009	Oct. 07, 2008	Oct. 06, 2009
RF CABLE (Chaintek)	Sucoflex 106	28077	Aug. 15, 2008	Aug. 14, 2009
RF Cable	8DFB	STCCAB-30M-1GHz	Oct. 07, 2008	Oct. 06, 2009
Software	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in Open Site No. C.

4. The FCC Site Registration No. is 656396.

5. The VCCI Site Registration No. is R-1626.

6. The CANADA Site Registration No. is IC 7450G-3.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

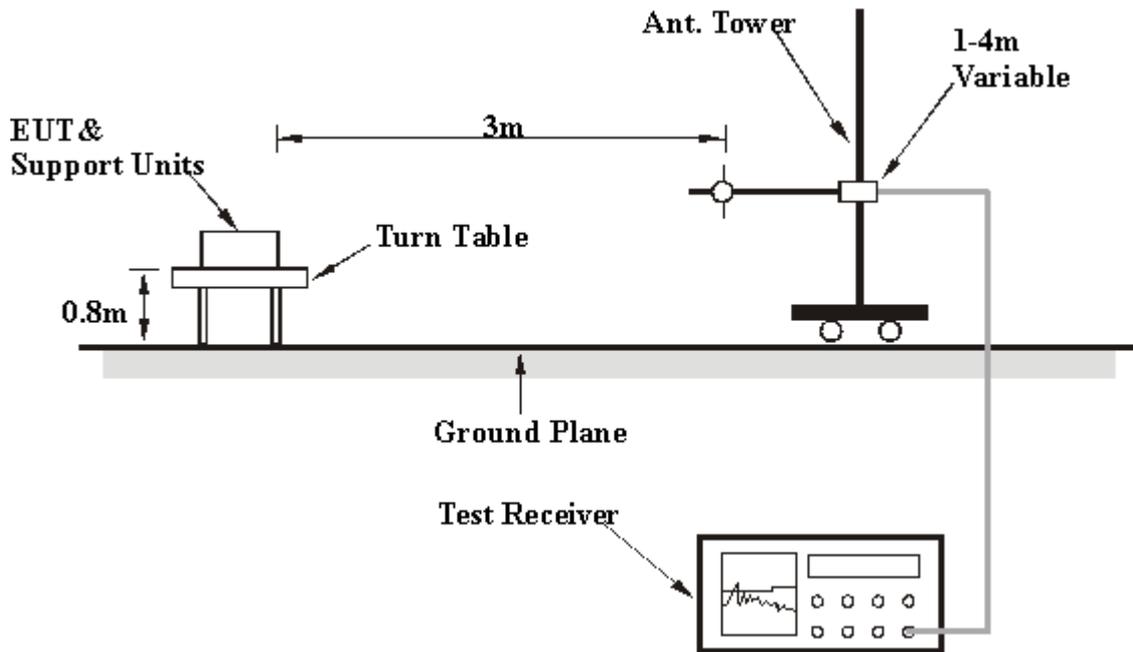

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. The support unit 1 (Notebook Computer) ran a test program “Control FCC Tool V1.0.0.1” to enable EUT under transmission condition continuously via one USB cable.



4.1.7 TEST RESULTS

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	DC 3V from batteries	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	30deg. C, 55%RH 965hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	177.36	24.69 QP	43.50	-18.81	1.56 H	225	10.31	14.38
2	189.23	27.85 QP	43.50	-15.65	1.11 H	24	14.79	13.06
3	199.99	28.25 QP	43.50	-15.25	1.65 H	326	15.86	12.39
4	213.01	29.64 QP	43.50	-13.86	1.62 H	221	16.77	12.87
5	479.99	30.60 QP	46.00	-15.40	1.87 H	42	8.71	21.89
6	960.02	32.30 QP	54.00	-21.70	1.00 H	108	1.99	30.31

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	177.40	28.20 QP	43.50	-15.30	1.20 V	24	13.83	14.37
2	192.20	30.00 QP	43.50	-13.50	1.26 V	326	17.13	12.87
3	229.61	28.20 QP	46.00	-17.80	1.11 V	8	14.71	13.49
4	440.01	29.65 QP	46.00	-16.35	1.65 V	86	8.96	20.69
5	480.00	26.36 QP	46.00	-19.64	1.11 V	9	4.47	21.89
6	584.18	24.21 QP	46.00	-21.79	1.32 V	63	-0.47	24.68
7	960.00	24.10 QP	46.00	-21.90	1.20 V	258	-6.21	30.31

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	DC 3V from batteries	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29deg. C, 63%RH 965hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00	46.12 PK	74.00	-27.88	1.06 H	170	15.80	30.32
2	2400.00	38.99 AV	54.00	-15.01	1.06 H	170	8.67	30.32
3	*2402.00	96.80 PK	114.00	-17.20	1.06 H	170	66.47	30.33
4	*2402.00	88.95 AV	94.00	-5.05	1.06 H	170	58.62	30.33
5	3603.00	46.19 PK	74.00	-27.81	1.22 H	73	12.97	33.22
6	3603.00	39.06 AV	54.00	-14.94	1.22 H	73	5.84	33.22
7	4804.00	46.71 PK	74.00	-27.29	1.19 H	306	9.98	36.73
8	4804.00	39.58 AV	54.00	-14.42	1.19 H	306	2.85	36.73
9	7206.00	53.44 PK	74.00	-20.56	1.62 H	89	10.30	43.14
10	7206.00	46.31 AV	54.00	-7.69	1.62 H	89	3.17	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00	47.91 PK	74.00	-26.09	1.45 V	29	17.59	30.32
2	2400.00	40.78 AV	54.00	-13.22	1.45 V	29	10.46	30.32
3	*2402.00	98.59 PK	114.00	-15.41	1.45 V	29	68.26	30.33
4	*2402.00	91.46 AV	94.00	-2.54	1.45 V	29	61.13	30.33
5	3603.00	48.22 PK	74.00	-25.78	1.43 V	79	15.00	33.22
6	3603.00	41.09 AV	54.00	-12.91	1.43 V	79	7.87	33.22
7	4804.00	46.58 PK	74.00	-27.42	1.03 V	62	9.85	36.73
8	4804.00	39.45 AV	54.00	-14.55	1.03 V	62	2.72	36.73
9	7206.00	52.69 PK	74.00	-21.31	1.40 V	189	9.55	43.14
10	7206.00	45.56 AV	54.00	-8.44	1.40 V	189	2.42	43.14

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. Dwell Time = 44ms
 7. Average value = peak reading + 20log(Dwell Time / 100ms).



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 20	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	DC 3V from batteries	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29deg. C, 63%RH 965hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2442.00	97.83 PK	114.00	-16.17	1.08 H	199	67.35	30.48
2	*2442.00	90.70 AV	94.00	-3.30	1.08 H	199	60.22	30.48
3	3662.00	45.84 PK	74.00	-28.16	1.38 H	58	12.44	33.40
4	3662.00	38.71 AV	54.00	-15.29	1.38 H	58	5.31	33.40
5	4884.00	46.58 PK	74.00	-27.42	1.26 H	89	9.63	36.95
6	4884.00	39.45 AV	54.00	-14.55	1.26 H	89	2.50	36.95
7	7326.00	53.10 PK	74.00	-20.90	1.09 H	274	9.97	43.13
8	7326.00	45.97 AV	54.00	-8.03	1.09 H	274	2.84	43.13
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2442.00	99.03 PK	114.00	-14.97	1.50 V	33	68.55	30.48
2	*2442.00	91.90 AV	94.00	-2.10	1.50 V	33	61.42	30.48
3	3662.00	47.29 PK	74.00	-26.71	1.50 V	83	13.89	33.40
4	3662.00	40.16 AV	54.00	-13.84	1.50 V	83	6.76	33.40
5	4884.00	46.63 PK	74.00	-27.37	1.08 V	2	9.68	36.95
6	4884.00	39.50 AV	54.00	-14.50	1.08 V	2	2.55	36.95
7	7326.00	52.84 PK	74.00	-21.16	1.38 V	200	9.71	43.13
8	7326.00	45.71 AV	54.00	-8.29	1.38 V	200	2.58	43.13

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. Dwell Time = 44ms
 7. Average value = peak reading + 20log(Dwell Time / 100ms).



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	DC 3V from batteries	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29deg. C, 63%RH 965hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2482.00	97.71 PK	114.00	-16.29	1.10 H	183	67.09	30.62
2	*2482.00	90.58 AV	94.00	-3.42	1.10 H	183	59.96	30.62
3	2483.50	53.14 PK	74.00	-20.86	1.10 H	183	22.51	30.63
4	2483.50	46.01 AV	54.00	-7.99	1.10 H	183	15.38	30.63
5	3722.00	44.93 PK	74.00	-29.07	1.00 H	279	11.35	33.58
6	3722.00	37.80 AV	54.00	-16.20	1.00 H	279	4.22	33.58
7	4964.00	46.08 PK	74.00	-27.92	1.50 H	29	8.92	37.16
8	4964.00	38.95 AV	54.00	-15.05	1.50 H	29	1.79	37.16
9	7446.00	53.22 PK	74.00	-20.78	1.40 H	304	10.10	43.12
10	7446.00	46.09 AV	54.00	-7.91	1.40 H	304	2.97	43.12
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2482.00	98.76 PK	114.00	-15.24	1.50 V	33	68.14	30.62
2	*2482.00	91.63 AV	94.00	-2.37	1.50 V	33	61.01	30.62
3	2483.50	54.19 PK	74.00	-19.81	1.50 V	33	23.56	30.63
4	2483.50	47.06 AV	54.00	-6.94	1.50 V	33	16.43	30.63
5	3722.00	47.14 PK	74.00	-26.86	1.11 V	4	13.56	33.58
6	3722.00	40.01 AV	54.00	-13.99	1.11 V	4	6.43	33.58
7	4964.00	46.58 PK	74.00	-27.42	1.58 V	62	9.42	37.16
8	4964.00	39.45 AV	54.00	-14.55	1.58 V	62	2.29	37.16
9	7446.00	52.40 PK	74.00	-21.60	1.48 V	102	9.28	43.12
10	7446.00	45.27 AV	54.00	-8.73	1.48 V	102	2.15	43.12

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. Dwell Time = 44ms
 7. Average value = peak reading + 20log(Dwell Time / 100ms).



4.2 CONDUCTED - OUT BAND MEASUREMENT

4.2.1 LIMITS OF CONDUCTED - OUT BAND MEASUREMENT

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2008	Dec. 08, 2009

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.2.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 300 MHz bandwidth from band edge. The band edges was measured and recorded.

4.2.4 DEVIATION FROM TEST STANDARD



No deviation

4.2.5 EUT OPERATING CONDITION



The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.2.6 TEST RESULTS

Emissions radiated outside of the specified frequency bands, please refer pages form 12 to 15 for met the requirement of the general radiated emission limits in § 15.209. CH0

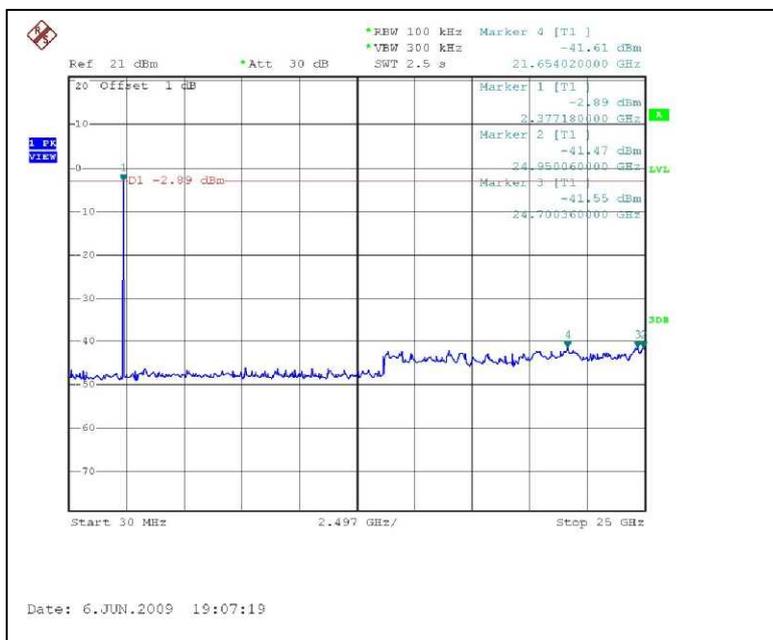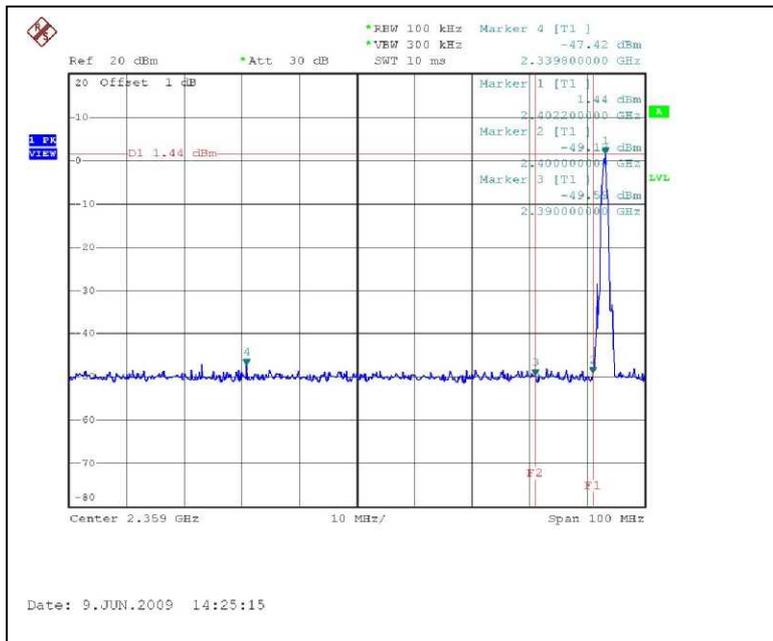

CH40

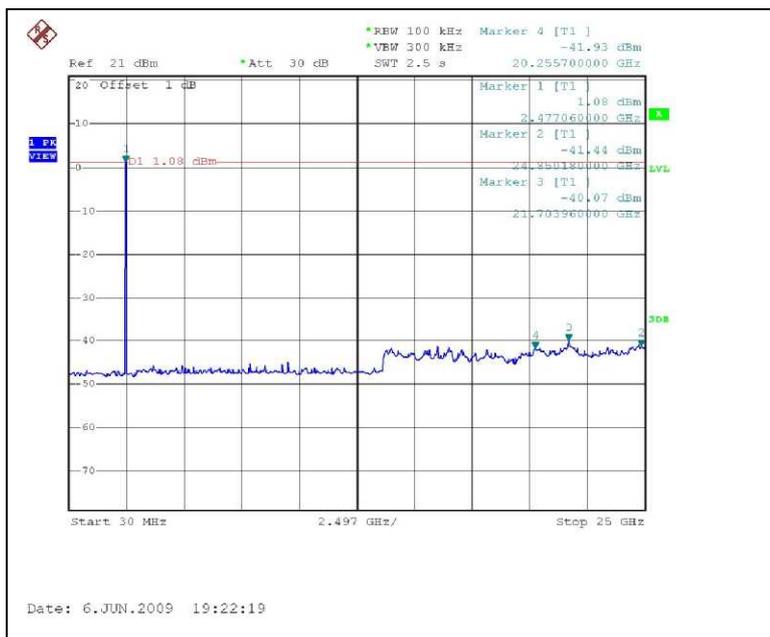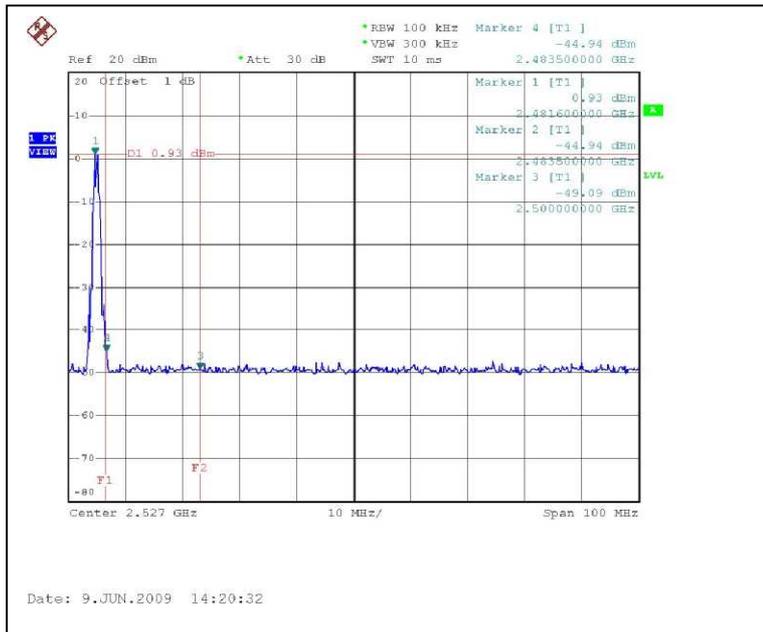



A D T

5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Email: service@adt.com.tw
Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---