

## FCC Test Report

**Report No.:** FC171110E06

**Test Model:** M-R0071

**Received Date:** Nov. 10, 2017

**Test Date:** Nov. 15, 2017

**Issued Date:** Jan. 17, 2018

**Applicant:** LOGITECH FAR EAST LTD.

**Address:** #2 Creation Rd. 4, Science-Based Ind. Park Hsinchu Taiwan, R.O.C.

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**Test Location (1):** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**Test Location (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin  
Chu Hsien 307, Taiwan R.O.C.

**FCC Registration /  
Designation Number:** 810758 / TW1085 for Test Location (1)  
960022 / TW1058 for Test Location (2)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

|   |           |
|---|-----------|
| <b>Release Control Record</b> .....   | <b>3</b>  |
| <b>1 Certificate of Conformity</b> .....  | <b>4</b>  |
| <b>2 Summary of Test Results</b> .....  | <b>5</b>  |
| 2.1 Measurement Uncertainty .....   | 5         |
| 2.2 Modification Record .....   | 5         |
| <b>3 General Information</b> .....  | <b>6</b>  |
| 3.1 Features of EUT .....   | 6         |
| 3.2 General Description of EUT .....  | 6         |
| 3.3 Operating Modes of EUT and Determination of Worst Case Operating Mode ..... | 7         |
| 3.4 Test Program Used and Operation Descriptions .....                          | 7         |
| 3.5 Primary Clock Frequencies of Internal Source .....                          | 7         |
| <b>4 Configuration and Connections with EUT</b> .....                           | <b>8</b>  |
| 4.1 Connection Diagram of EUT and Peripheral Devices .....                      | 8         |
| 4.2 Configuration of Peripheral Devices and Cable Connections .....             | 9         |
| <b>5 Radiated Emissions up to 1 GHz</b> .....                                   | <b>10</b> |
| 5.1 Limits .....  | 10        |
| 5.2 Test Instruments .....  | 11        |
| 5.3 Test Arrangement .....  | 12        |
| 5.4 Supplementary Information .....   | 12        |
| 5.5 Test Results .....  | 13        |
| <b>6 Radiated Emissions above 1 GHz</b> .....                                   | <b>15</b> |
| 6.1 Limits .....  | 15        |
| 6.2 Test Instruments .....  | 16        |
| 6.3 Test Arrangement .....  | 17        |
| 6.4 Supplementary Information .....   | 17        |
| 6.5 Test Results .....  | 18        |
| <b>7 Pictures of Test Arrangements</b> .....                                    | <b>20</b> |
| <b>Appendix – Information on the Testing Laboratories</b> .....                 | <b>21</b> |

### Release Control Record

| Issue No.   | Description       | Date Issued   |
|-------------|-------------------|---------------|
| FC171110E06 | Original release. | Jan. 17, 2018 |

## 1 Certificate of Conformity

**Product:** 2.4GHz Cordless Mouse

**Brand:** logitech G

**Test Model:** M-R0071

**Sample Status:** ENGINEERING SAMPLE

**Applicant:** LOGITECH FAR EAST LTD.

**Test Date:** Nov. 15, 2017

**Standards:** 47 CFR FCC Part 15, Subpart B, Class B  
ICES-003:2016 Issue 6, Class B  
ANSI C63.4:2014

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Mary Ko , **Date:** Jan. 17, 2018  
Mary Ko / Specialist

**Approved by :** Ken Lu , **Date:** Jan. 17, 2018  
Ken Lu / Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart B , Class B/ ICES-003:2016 Issue 6, Class

ANSI C63.4:2014

| FCC Clause | ICES-003 Clause | Test Item                         | Result/Remarks  | Verdict |
|------------|-----------------|-----------------------------------|---|---------|
| 15.107     | 6.1             | AC Power Line Conducted Emissions | Not applicable, because the port is absent in the EUT       | N/A     |
| 15.109     | 6.2.1           | Radiated Emissions up to 1 GHz    | Minimum passing Class B margin is -4.47 dB at 30.65 MHz     | Pass    |
|            | 6.2.2           | Radiated Emissions above 1 GHz    | Minimum passing Class B margin is -10.86 dB at 11060.00 MHz | Pass    |

Note: There is no deviation to the applied test methods and requirements covered by the scope of this report.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

| Measurement                    | Frequency    | Expanded Uncertainty (k=2) ( $\pm$ ) |
|--------------------------------|--------------|--------------------------------------|
| Radiated Emissions up to 1 GHz | 30MHz ~ 1GHz | 3.91 dB                              |
| Radiated Emissions above 1 GHz | 1GHz ~ 6GHz  | 4.73 dB                              |
|                                | 6GHz ~ 18GHz | 5.24 dB                              |

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 Features of EUT

The tests reported herein were performed according to the method specified by LOGITECH FAR EAST LTD. for detailed feature description, please refer to the manufacturer's specifications or user's manual.

#### 3.2 General Description of EUT

|                     |                       |
|---------------------|-----------------------|
| Product             | 2.4GHz Cordless Mouse |
| Brand               | logitech G            |
| Test Model          | M-R0071               |
| Status of EUT       | ENGINEERING SAMPLE    |
| Power Supply Rating | DC 1.5V from battery  |
| Antenna Type        | Refer to Note         |
| Antenna Connector   | Refer to Note         |
| Accessory Device    | NA                    |
| Data Cable Supplied | NA                    |

Note:

1. The EUT may have a lot of colors for marketing requirement.
2. The antennas provided to the EUT, please refer to the following table:

| Antenna Gain (dBi) | Frequency range(GHz) | Antenna Type         | Connecter Type |
|--------------------|----------------------|----------------------|----------------|
| 1.03               | 2.4~2.4835           | Ceramic chip antenna | None           |

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.3 Operating Modes of EUT and Determination of Worst Case Operating Mode

Test mode is presented in the report as below.

| Mode | Test Condition |
|------|----------------|
| 1    | Normal Mode    |

### 3.4 Test Program Used and Operation Descriptions


1. Turn on the power of all equipment.
2. Set the EUT under typical use condition.
3. Support unit A (PC) runs "EMC test.exe" then sends "H" messages to support unit C (Monitor).

### 3.5 Primary Clock Frequencies of Internal Source

The EUT is provided by LOGITECH FAR EAST LTD., for detailed internal source, please refer to the manufacturer's specifications.

## 4 Configuration and Connections with EUT

### 4.1 Connection Diagram of EUT and Peripheral Devices

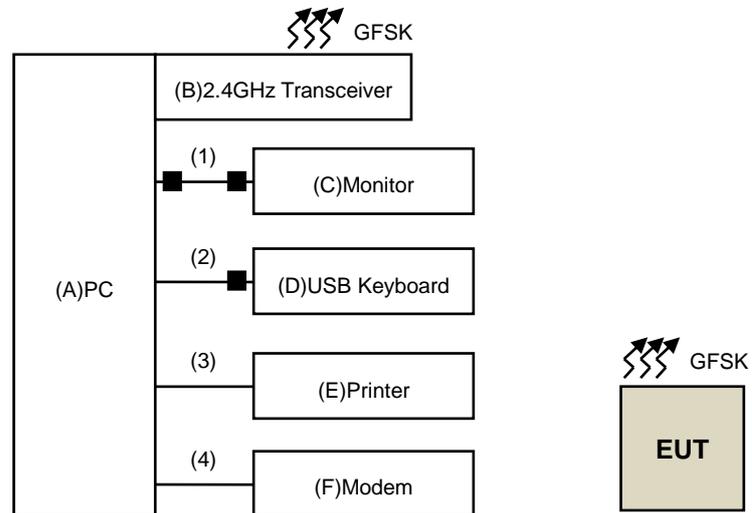

#### 4.2 Configuration of Peripheral Devices and Cable Connections

| ID | Product            | Brand    | Model No. | Serial No.                   | FCC ID        | Remarks            |
|----|--------------------|----------|-----------|------------------------------|---------------|--------------------|
| A  | PC                 | DELL     | 990X      | NA                           | NA            | Supplied by client |
| B  | 2.4GHz Transceiver | Logitech | C-U0008   | NA                           | JNZCU0008     | Supplied by client |
| C  | Monitor            | DELL     | E228WFPc  | CN-OX765G-6418<br>0-88P-09ZM | FCC DoC       | Provided by Lab    |
| D  | USB Keyboard       | DELL     | SK-8115   | MY-0J4635-71619<br>-67V-0111 | FCC Standards | Provided by Lab    |
| E  | Printer            | EPSON    | LQ-300+II | G88Y074085                   | FCC DoC       | Provided by Lab    |
| F  | Modem              | ACEEX    | 1414      | 0206026771                   | IFAXDM1414    | Provided by Lab    |

1. All power cords of the above support units are non-shielded (1.8m).

| ID | Descriptions | Qty. | Length (m) | Shielding (Yes/No) | Cores (Qty.) | Remarks         |
|----|--------------|------|------------|--------------------|--------------|-----------------|
| 1  | VGA Cable    | 1    | 1.8        | Yes                | 2            | Provided by Lab |
| 2  | USB Cable    | 1    | 1.8        | Yes                | 1            | Provided by Lab |
| 3  | USB Cable    | 1    | 1.8        | Yes                | 0            | Provided by Lab |
| 4  | RS-232 Cable | 1    | 1          | Yes                | 0            | Provided by Lab |

Note: The cores are originally attached to the cables.

## 5 Radiated Emissions up to 1 GHz

### 5.1 Limits

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

| Radiated Emissions Limits at 10 meters (dB $\mu$ V/m) |                             |                             |                   |                   |
|---|-----------------------------|-----------------------------|-------------------|-------------------|
| Frequencies (MHz)                                     | FCC 15B / ICES-003, Class A | FCC 15B / ICES-003, Class B | CISPR 22, Class A | CISPR 22, Class B |
| 30-88   | 39                          | 29.5                        | 40                | 30                |
| 88-216  | 43.5                        | 33.1                        |                   |                   |
| 216-230   | 46.4                        | 35.6                        |                   |                   |
| 230-960   |                             |                             |                   |                   |
| 960-1000  | 49.5                        | 43.5                        | 47                | 37                |

| Radiated Emissions Limits at 3 meters (dB $\mu$ V/m) |                             |                             |                   |                   |
|--|-----------------------------|-----------------------------|-------------------|-------------------|
| Frequencies (MHz)                                    | FCC 15B / ICES-003, Class A | FCC 15B / ICES-003, Class B | CISPR 22, Class A | CISPR 22, Class B |
| 30-88  | 49.5                        | 40                          | 50.5              | 40.5              |
| 88-216   | 54                          | 43.5                        |                   |                   |
| 216-230  | 56.9                        | 46                          |                   |                   |
| 230-960  |                             |                             |                   |                   |
| 960-1000   | 60                          | 54                          | 57.5              | 47.5              |

- Notes:
1. The lower limit shall apply at the transition frequencies.
  2. Emission level (dB $\mu$ V/m) = 20 log Emission level (uV/m).
  3. QP detector shall be applied if not specified.

## 5.2 Test Instruments

| DESCRIPTION & MANUFACTURER                 | MODEL NO.            | SERIAL NO.                                   | CALIBRATED DATE | CALIBRATED UNTIL |
|--|----------------------|--|-----------------|------------------|
| Test Receiver<br>Agilent                   | N9038A               | MY50010125                                   | Apr. 15, 2017   | Apr. 14, 2018    |
|  | N9038A               | MY50010132                                   | June. 16, 2017  | June. 15, 2018   |
| Pre-Amplifier<br>Sonoma                    | 310N                 | 352925                                       | Aug. 28, 2017   | Aug. 27, 2018    |
|  | 310N                 | 352926                                       | Aug. 28, 2017   | Aug. 27, 2018    |
| Trilog Broadband<br>Antenna<br>SCHWARZBECK | VULB 9168            | 9168-359                                     | Dec. 28, 2016   | Dec. 27, 2017    |
|  | VULB 9168            | 9168-358                                     | Dec. 16, 2016   | Dec. 15, 2017    |
| Fixed attenuator<br>Mini-Circuits          | UNAT-5+              | CHF-001                                      | Sep. 07, 2017   | Sep. 06, 2018    |
|  | UNAT-5+              | CHF-002                                      | Sep. 07, 2017   | Sep. 06, 2018    |
| RF Cable                                   | 8D-FB                | CHFCAB-001-1<br>CHFCAB-001-3<br>CHFCAB-001-4 | Sep. 20, 2017   | Sep. 19, 2018    |
|  |                      | CHFCAB-002-1<br>CHFCAB-002-3<br>CHFCAB-002-4 | Sep. 20, 2017   | Sep. 19, 2018    |
| Software<br>BVADT                          | ADT_Radiated_V8.7.08 | NA   | NA              | NA               |
| Antenna Tower & Turn<br>Table<br>CT        | NA                   | NA   | NA              | NA               |


**Note:**

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Chamber F room
3. The VCCI Site Registration No. is R-3252.
4. The CANADA Site Registration No. is IC 7450H-1.
5. Tested Date: Nov. 15, 2017.

### 5.3 Test Arrangement

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited test facility. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is up to 1 GHz.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency up to 1GHz.

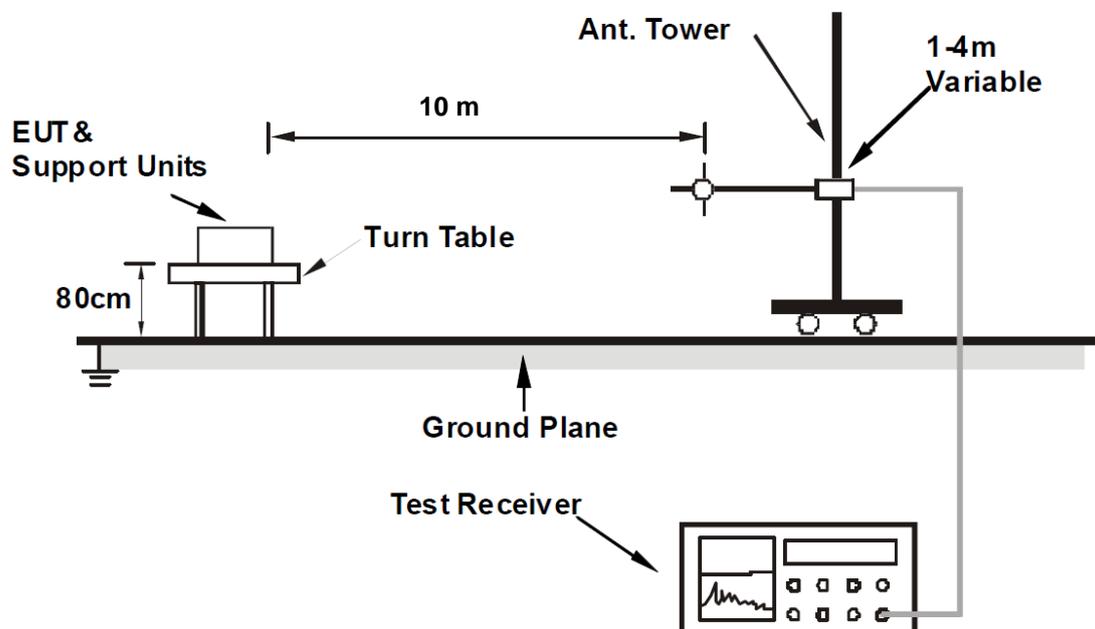

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

### 5.4 Supplementary Information

There is not any deviation from the test standards for the test method.


### 5.5 Test Results

|                 |                      |  |                         |
|-----------------|----------------------|--|-------------------------|
| Frequency Range | 30MHz ~ 1GHz         | Detector Function & Resolution Bandwidth | Quasi-Peak (QP), 120kHz |
| Input Power     | DC 1.5V from battery | Environmental Conditions                 | 23°C, 71%RH             |
| Tested by       | David Chuang         |  |                         |
| Test Mode       | Mode 1               |  |                         |

| Antenna Polarity & Test Distance : Horizontal at 10 m |                 |                         |                |             |                    |                      |                  |                          |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1   | 36.72           | 18.29 QP                | 30.00          | -11.71      | 3.00 H             | 14                   | 32.20            | -13.91                   |
| 2   | 60.87           | 17.89 QP                | 30.00          | -12.11      | 4.00 H             | 312                  | 31.64            | -13.75                   |
| 3   | 109.69          | 18.86 QP                | 30.00          | -11.14      | 4.00 H             | 175                  | 34.62            | -15.76                   |
| 4   | 366.47          | 21.63 QP                | 37.00          | -15.37      | 2.00 H             | 223                  | 31.40            | -9.77                    |
| 5   | 488.54          | 27.18 QP                | 37.00          | -9.82       | 2.00 H             | 66                   | 33.88            | -6.70                    |
| 6   | 579.75          | 30.01 QP                | 37.00          | -6.99       | 1.00 H             | 184                  | 34.82            | -4.81                    |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

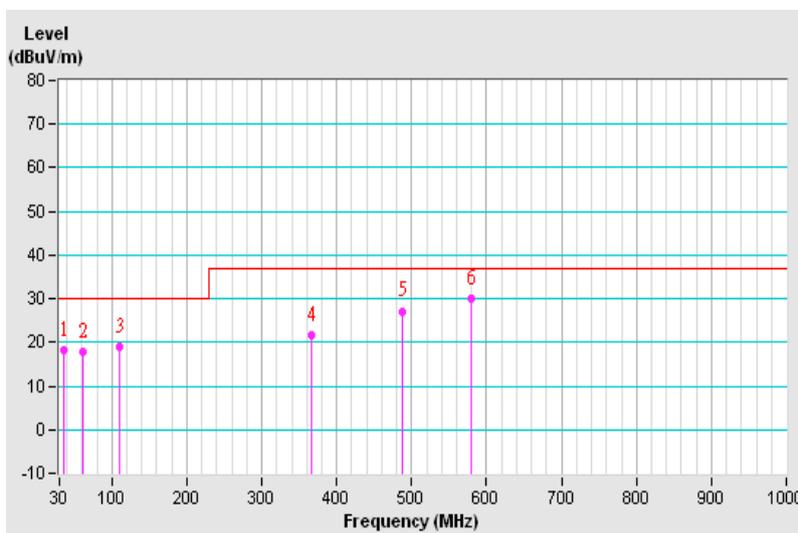


|                 |                      |  |                         |
|-----------------|----------------------|--|-------------------------|
| Frequency Range | 30MHz ~ 1GHz         | Detector Function & Resolution Bandwidth | Quasi-Peak (QP), 120kHz |
| Input Power     | DC 1.5V from battery | Environmental Conditions                 | 23°C, 71%RH             |
| Tested by       | David Chuang         |  |                         |
| Test Mode       | Mode 1               |  |                         |

| Antenna Polarity & Test Distance : Vertical at 10 m |                 |                         |                |             |                    |                      |                  |                          |
|---|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No  | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1   | 30.65           | 25.53 QP                | 30.00          | -4.47       | 4.00 V             | 121                  | 39.93            | -14.40                   |
| 2   | 59.97           | 23.56 QP                | 30.00          | -6.44       | 2.00 V             | 348                  | 36.94            | -13.38                   |
| 3   | 110.15          | 24.51 QP                | 30.00          | -5.49       | 1.00 V             | 62                   | 40.20            | -15.69                   |
| 4   | 218.16          | 22.65 QP                | 30.00          | -7.35       | 1.00 V             | 112                  | 38.38            | -15.73                   |
| 5   | 365.40          | 25.54 QP                | 37.00          | -11.46      | 1.00 V             | 112                  | 35.21            | -9.67                    |
| 6   | 488.74          | 25.22 QP                | 37.00          | -11.78      | 1.00 V             | 83                   | 31.47            | -6.25                    |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

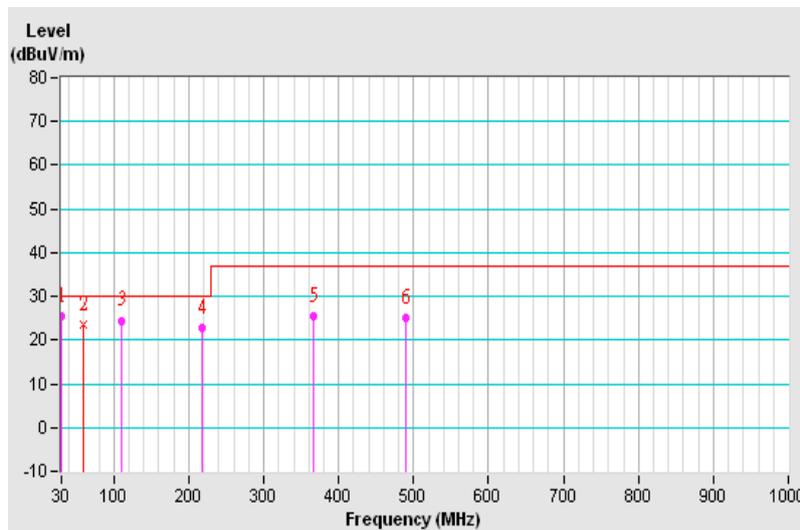

## 6 Radiated Emissions above 1 GHz

### 6.1 Limits

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

| Radiated Emissions Limits at 10 meters (dB $\mu$ V/m) |                             |                             |                   |                   |
|---|-----------------------------|-----------------------------|-------------------|-------------------|
| Frequencies (MHz)                                     | FCC 15B / ICES-003, Class A | FCC 15B / ICES-003, Class B | CISPR 22, Class A | CISPR 22, Class B |
| 1000-3000   | Avg: 49.5                   | Avg: 43.5                   | Not defined       | Not defined       |
| Above 3000  | Peak: 69.5                  | Peak: 63.5                  | Not defined       | Not defined       |

| Radiated Emissions Limits at 3 meters (dB $\mu$ V/m) |                             |                             |                     |                     |
|--|-----------------------------|-----------------------------|---------------------|---------------------|
| Frequencies (MHz)                                    | FCC 15B / ICES-003, Class A | FCC 15B / ICES-003, Class B | CISPR 22, Class A   | CISPR 22, Class B   |
| 1000-3000  | Avg: 60                     | Avg: 54                     | Avg: 56<br>Peak: 76 | Avg: 50<br>Peak: 70 |
| Above 3000   | Peak: 80                    | Peak: 74                    | Avg: 60<br>Peak: 80 | Avg: 54<br>Peak: 74 |

- Notes:
1. The lower limit shall apply at the transition frequencies.
  2. Emission level (dB $\mu$ V/m) = 20 log Emission level (uV/m).
  3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Frequency Range (For unintentional radiators)

| Highest frequency generated or used in the device or on which the device operates or tunes (MHz) | Upper frequency of measurement range (MHz)                         |
|--|--|
| Below 1.705  | 30   |
| 1.705-108  | 1000   |
| 108-500  | 2000   |
| 500-1000   | 5000   |
| Above 1000   | 5th harmonic of the highest frequency or 40GHz, whichever is lower |

## 6.2 Test Instruments

| DESCRIPTION & MANUFACTURER              | MODEL NO.                | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|---|--------------------------|------------|-----------------|------------------|
| Test Receiver<br>Agilent                | N9038A                   | MY50010125 | Apr. 15, 2017   | Apr. 14, 2018    |
| Pre-Amplifier<br>Agilent                | 8449B                    | 3008A01975 | Feb. 26, 2017   | Feb. 25, 2018    |
| Horn Antenna<br>SCHWARZBECK             | BBHA 9120D               | D123       | Dec. 15, 2016   | Dec. 14, 2017    |
| RF Coaxial Cable                        | EMC104-SM-SM-11000       | 170209     | Mar. 07, 2017   | Mar. 06, 2018    |
| RF Coaxial Cable                        | EMC104-SM-SM-6000        | 170207     | Mar. 07, 2017   | Mar. 06, 2018    |
| RF Coaxial Cable                        | EMC104-SM-SM-2500        | 170206     | Mar. 07, 2017   | Mar. 06, 2018    |
| Software<br>BVADT                       | ADT_Radiated_<br>V8.7.08 | NA         | NA              | NA               |
| Antenna Tower & Turn<br>Table<br>CT     | NA                       | NA         | NA              | NA               |
| Fix tool for Boresight<br>antenna tower | BAF-01                   | 5          | NA              | NA               |


**Note:**

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Chamber F room
3. Tested Date: Nov. 15, 2017

### 6.3 Test Arrangement

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The spectrum analyzer system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

Note: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection (PK) at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.

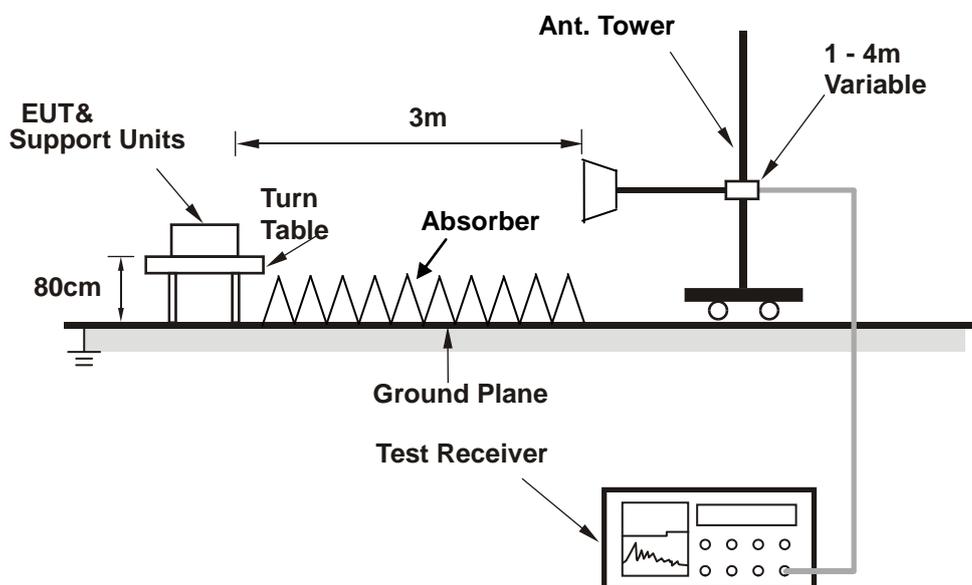

The test arrangement is in accordance with ANSI 63.4:2014. For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 6.4 Supplementary Information

There is not any deviation from the test standards for the test method


## 6.5 Test Results

|                 |                      |  |                                |
|-----------------|----------------------|--|--------------------------------|
| Frequency Range | 1GHz~12.5GHz         | Detector Function & Resolution Bandwidth | Peak (PK) / Average (AV), 1MHz |
| Input Power     | DC 1.5V from battery | Environmental Conditions                 | 24°C, 71%RH                    |
| Tested by       | David Chuang         |  |                                |
| Test Mode       | Mode 1               |  |                                |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | 1500.00         | 42.43 PK                | 74.00          | -31.57      | 1.00 H             | 140                  | 45.94            | -3.51                    |
| 2  | 1500.00         | 34.69 AV                | 54.00          | -19.31      | 1.00 H             | 140                  | 38.20            | -3.51                    |
| 3  | 1750.00         | 44.91 PK                | 74.00          | -29.09      | 1.00 H             | 183                  | 47.38            | -2.47                    |
| 4  | 1750.00         | 27.61 AV                | 54.00          | -26.39      | 1.00 H             | 183                  | 30.08            | -2.47                    |
| 5  | 2055.00         | 42.94 PK                | 74.00          | -31.06      | 1.00 H             | 134                  | 43.87            | -0.93                    |
| 6  | 2055.00         | 25.99 AV                | 54.00          | -28.01      | 1.00 H             | 134                  | 26.92            | -0.93                    |
| 7  | 3320.00         | 48.50 PK                | 74.00          | -25.50      | 1.00 H             | 147                  | 45.36            | 3.14                     |
| 8  | 3320.00         | 29.45 AV                | 54.00          | -24.55      | 1.00 H             | 147                  | 26.31            | 3.14                     |
| 9  | 3390.00         | 49.55 PK                | 74.00          | -24.45      | 1.00 H             | 327                  | 46.27            | 3.28                     |
| 10   | 3390.00         | 30.62 AV                | 54.00          | -23.38      | 1.00 H             | 327                  | 27.34            | 3.28                     |
| 11   | 11060.00        | 55.96 PK                | 74.00          | -18.04      | 1.00 H             | 13                   | 33.55            | 22.41                    |
| 12   | 11060.00        | 43.14 AV                | 54.00          | -10.86      | 1.00 H             | 13                   | 20.73            | 22.41                    |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

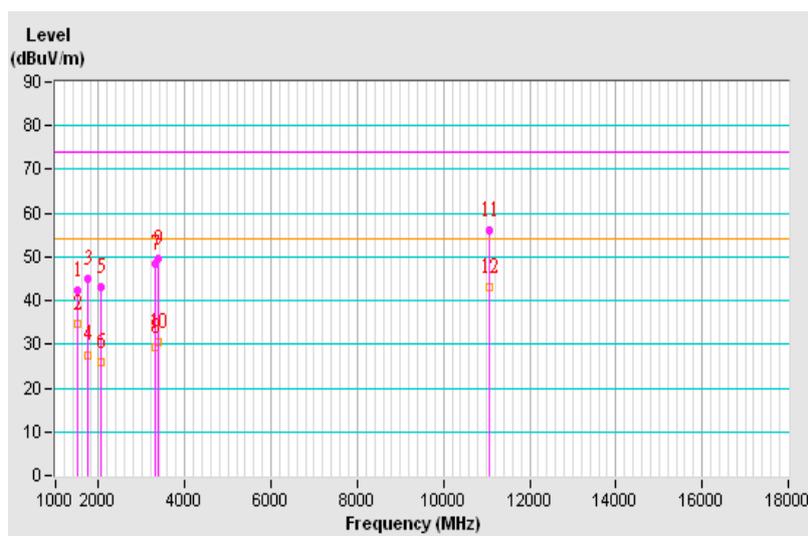


|                 |                      |  |                                |
|-----------------|----------------------|--|--------------------------------|
| Frequency Range | 1GHz~12.5GHz         | Detector Function & Resolution Bandwidth | Peak (PK) / Average (AV), 1MHz |
| Input Power     | DC 1.5V from battery | Environmental Conditions                 | 24°C, 71%RH                    |
| Tested by       | David Chuang         |  |                                |
| Test Mode       | Mode 1               |  |                                |

**Antenna Polarity & Test Distance : Vertical at 3 m**

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1  | 2000.00         | 40.53 PK                | 74.00          | -33.47      | 1.00 V             | 170                  | 41.78            | -1.25                    |
| 2  | 2000.00         | 26.05 AV                | 54.00          | -27.95      | 1.00 V             | 170                  | 27.30            | -1.25                    |
| 3  | 3000.00         | 43.23 PK                | 74.00          | -30.77      | 1.00 V             | 296                  | 40.54            | 2.69                     |
| 4  | 3000.00         | 32.75 AV                | 54.00          | -21.25      | 1.00 V             | 296                  | 30.06            | 2.69                     |
| 5  | 3390.00         | 43.48 PK                | 74.00          | -30.52      | 1.00 V             | 277                  | 40.20            | 3.28                     |
| 6  | 3390.00         | 28.59 AV                | 54.00          | -25.41      | 1.00 V             | 277                  | 25.31            | 3.28                     |
| 7  | 3950.00         | 42.03 PK                | 74.00          | -31.97      | 1.00 V             | 11                   | 37.17            | 4.86                     |
| 8  | 3950.00         | 29.23 AV                | 54.00          | -24.77      | 1.00 V             | 11                   | 24.37            | 4.86                     |
| 9  | 10660.00        | 55.37 PK                | 74.00          | -18.63      | 1.00 V             | 188                  | 34.49            | 20.88                    |
| 10 | 10660.00        | 41.70 AV                | 54.00          | -12.30      | 1.00 V             | 188                  | 20.82            | 20.88                    |
| 11 | 12490.00        | 55.67 PK                | 74.00          | -18.33      | 1.00 V             | 88                   | 34.13            | 21.54                    |
| 12 | 12490.00        | 41.95 AV                | 54.00          | -12.05      | 1.00 V             | 88                   | 20.41            | 21.54                    |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

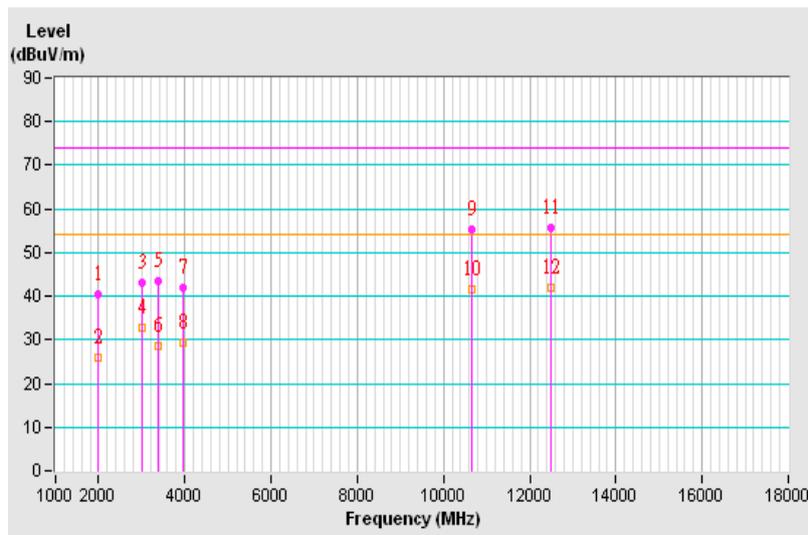

## 7 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---