



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	LOGITECH FAR EAST LTD.
Applicant Address	#2 Creation Rd. 4, Science-Based Ind. Park Hsinchu Taiwan, R.O.C.
FCC ID	JNZVR0001
Manufacturer's company	LOGITECH FAR EAST LTD.
Manufacturer Address	#2 Creation Rd. 4, Science-Based Ind. Park Hsinchu Taiwan, R.O.C.

Product Name	Wi-Fi Webcam
Brand Name	Logitech
Model Name	V-R0001
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Received Date	Mar. 15, 2012
Final Test Date	Jun. 23, 2012
Submission Type	Original Equipment

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a (5150 ~ 5250MHz / 5470 ~ 5725MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009** and **47 CFR FCC Part 15 Subpart E**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE.....	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION.....	3
3.1. Product Details	3
3.2. Accessories	5
3.3. Table for Filed Antenna	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units	9
3.8. Table for Parameters of Test Software Setting	10
3.9. Test Configurations.....	11
4. TEST RESULT.....	14
4.1. AC Power Line Conducted Emissions Measurement	14
4.2. 99% Occupied Bandwidth Measurement.....	18
4.3. Maximum Conducted Output Power Measurement.....	34
4.4. Power Spectral Density Measurement.....	38
4.5. Peak Excursion Measurement	46
4.6. Radiated Emissions Measurement.....	54
4.7. Band Edge Emissions Measurement.....	85
4.8. Frequency Stability Measurement.....	96
4.9. Antenna Requirements	98
5. LIST OF MEASURING EQUIPMENTS	99
6. TEST LOCATION.....	101
7. TAF CERTIFICATE OF ACCREDITATION.....	102
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A35
APPENDIX B. TEST PHOTOS	B1 ~ B6
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE	C1 ~ C3


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR231546AB	Rev. 01	Initial issue of report	Jul. 11, 2012

1. CERTIFICATE OF COMPLIANCE

Product Name : Wi-Fi Webcam
Brand Name : Logitech
Model Name : V-R0001
Applicant : LOGITECH FAR EAST LTD.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 15, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Jordan Hsiao

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	5.76 dB
4.2	15.407(a)	26dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	1.82dB
4.4	15.407(a)	Power Spectral Density	Complies	3.50 dB
4.5	15.407(a)	Peak Excursion	Complies	7.51 dB
4.6	15.407(b)	Radiated Emissions	Complies	4.05 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.09 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From Adapter and Battery
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	16 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS0 (20MHz): 18.24 MHz ; MCS0 (40MHz): 36.48 MHz
Conducted Output Power	Band 1: MCS0 (20MHz): 15.06 dBm ; MCS0 (40MHz): 14.53 dBm Band 2: MCS0 (20MHz): 13.81 dBm ; MCS0 (40MHz): 13.89 dBm Band 3: MCS0 (20MHz): 15.22 dBm ; MCS0 (40MHz): 14.21 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11a

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From Adapter and Battery
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	16
Channel Band Width (99%)	11a: 17.12 MHz
Conducted Output Power	Band 1: 15.18 dBm ; Band 2: 13.68 dBm ; Band 3: 15.26 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Single (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11a	V	X
IEEE 802.11n	V	V

IEEE 802.11n spec

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Datarate(Mbps)			
									800nsGI		400nsGI	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

3.2. Accessories

Power	Brand	Model	P/N	Rating
Adapter 1	Logitech	KSAS0060510100D5U	534-000565	Input:100-240V~50/60Hz 0.18A Output:5.1V-1.0A
Others				
USB Cable: Shielded, 1.8m				
Battery				
FCC Plug				
Pedestal				

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	INPAQ	-	PIFA Antenna	N/A	2.96	3.3

Note:

For IEEE 802.11a/n mode (1TX/1RX)

Ant. 1 can be used as transmitting/receiving antenna.

3.4. Table for Carrier Frequencies

For IEEE 802.11a, use Channel 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 132, 136, 140.

There are two bandwidth systems for IEEE 802.11n.

For both 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 132, 136, 140.

For both 40MHz bandwidth systems, use Channel 38, 46, 54, 62, 102, 110, 134.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
5250~5350 MHz Band 2	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310 MHz
	56	5280 MHz	64	5320 MHz
5470~5725 MHz Band 3	100	5500 MHz	118	5590 MHz
	102	5510 MHz	116	5580 MHz
	104	5520 MHz	132	5660 MHz
	108	5540 MHz	134	5670 MHz
	110	5550 MHz	136	5680 MHz
	112	5560 MHz	140	5700 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal Link		Auto	-	-
Max. Conducted Output Power Power Spectral Density	MCS0/20MHz	Band 1~2	MCS0	36/40/48/52/60/64	1
		Band 3	MCS0	100/116/140	
	MCS0/40MHz	Band 1~2	MCS0	38/46/54/62	1
		Band 3	MCS0	102/118/134	
	11a/BPSK	Band 1~2	6Mbps	36/40/48/52/60/64	1
		Band 3	6Mbps	100/116/140	
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement Peak Excursion	MCS0/20MHz	Band 1~2	MCS0	36/40/48/52/60/64	1
		Band 3	MCS0	100/116/140	
	MCS0/40MHz	Band 1~2	MCS0	38/46/54/62	1
		Band 3	MCS0	102/118/134	
	11a/BPSK	Band 1~2	6Mbps	36/40/48/52/60/64	1
		Band 3	6Mbps	100/116/140	
Radiated Emission Below 1GHz	Normal Link		Auto	-	-
Radiated Emission Above 1GHz	MCS0/20MHz	Band 1~2	MCS0	36/40/48/52/60/64	1
		Band 3	MCS0	100/116/140	
	MCS0/40MHz	Band 1~2	MCS0	38/46/54/62	1
		Band 3	MCS0	102/118/134	
	11a/BPSK	Band 1~2	6Mbps	36/40/48/52/60/64	1
		Band 3	6Mbps	100/116/140	
Band Edge Emission	MCS0/20MHz	Band 1~2	MCS0	36/40/48/52/60/64	1
		Band 3	MCS0	100/116/140	

	MCS0/40MHz	Band 1~2	MCS0	38/46/54/62	1
		Band 3	MCS0	102/118/134	
	11a/BPSK	Band 1~2	6Mbps	36/40/48/52/60/64	1
		Band 3	6Mbps	100/116/140	
Frequency Stability	Un-modulation		-	40/60	N/A

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. WiFi Video streaming + Microphone + Battery + Adapter – EUT With cradle

Mode 2. WiFi Video streaming + Microphone + Battery + EUT link with AP via WiFi + EUT link with Notebook via USB for storage and power – EUT with cradle.

Mode 2 generated the worst test results, so it was recorded in the report.

For Radiated Emission test:

For Radiated Emission test below 1GHz:

Mode 1. WiFi Video streaming + Microphone + Battery + Adapter – EUT With cradle

Mode 2. WiFi Video streaming + Microphone + Battery + EUT link with AP via WiFi + EUT link with Notebook via USB for storage and power – EUT with cradle.

Mode 2 generated the worst test results, so it was recorded in the report.

For Radiated Emission test Above 1GHz:

Mode 1. EUT with cradle.

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	1340	E2K4965AGNM
Mouse	Logitech	M-U0026	DoC
EARPHONES	E-books	E-EPC040	N/A
MIC	SONY	ECM-DS70p	N/A
Router	D-Link	DIR-815	N/A
Notebook	DELL	PP25L	E2K4965AGNM

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11n MCS0 20MHz / Ant. 1

Test Software Version	Hardware								
Frequency	5180 MHz	5200 MHz	5240 MHz	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz
MCS0 20MHz	18.00	18.00	18.00	18.00	18.00	18.00	18.00	18.00	18.00

Power Parameters of IEEE 802.11n MCS0 40MHz / Ant. 1

Test Software Version	Hardware						
Frequency	5190 MHz	5230 MHz	5270 MHz	5310 MHz	5510 MHz	5550 MHz	5670 MHz
MCS0 40MHz	17.00	18.00	18.00	18.00	16.00	18.00	18.00

Power Parameters of IEEE 802.11a / Ant. 1

Test Software Version	Hardware								
Frequency	5180 MHz	5200 MHz	5240 MHz	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz
IEEE 802.11a	18.00	18.00	18.00	18.00	18.00	18.00	18.00	18.00	18.00


During the test, “Hardware” under WIN XP was executed the test program to control the EUT continuously transmit RF signal.

3.9. Test Configurations

3.9.1. Radiation Emissions Test Configuration

Test Mode : Mode 2


Test Configuration: 30MHz ~1GHz

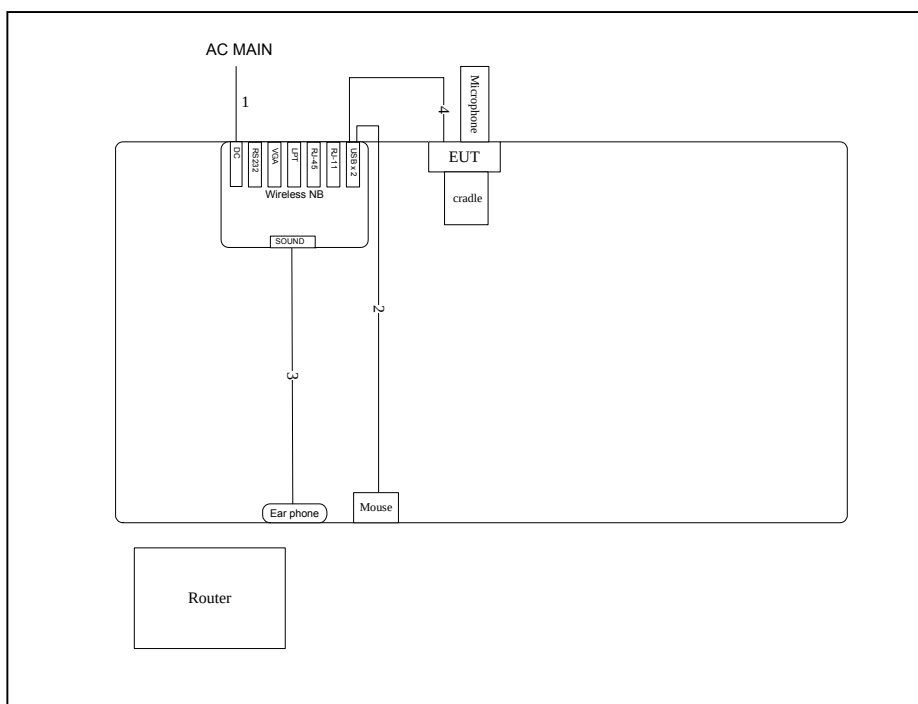

Item	Connection	Shield	Length
1	Power cable	No	2.6M
2	USB cable	No	1.8M
3	Earphones cable	No	1.1M
4	USB cable	Yes	1.8M

Test Mode : Mode 1


Test Configuration: above 1GHz

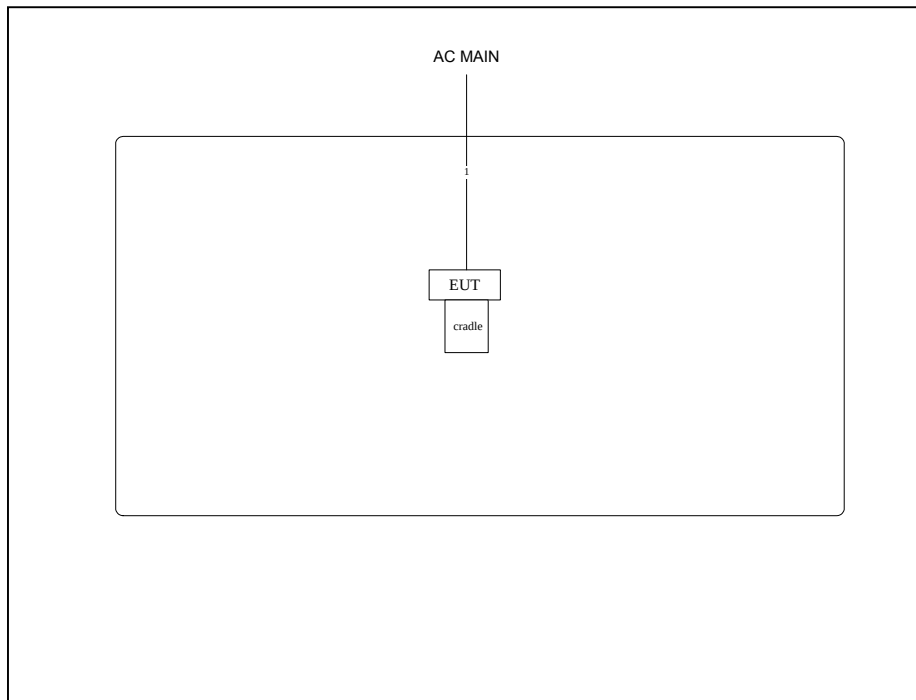

Item	Connection	Shield	Length
1	USB cable	Yes	1.8M

3.9.2. AC Power Line Conduction Emissions Test Configuration

Test Mode : Mode 2

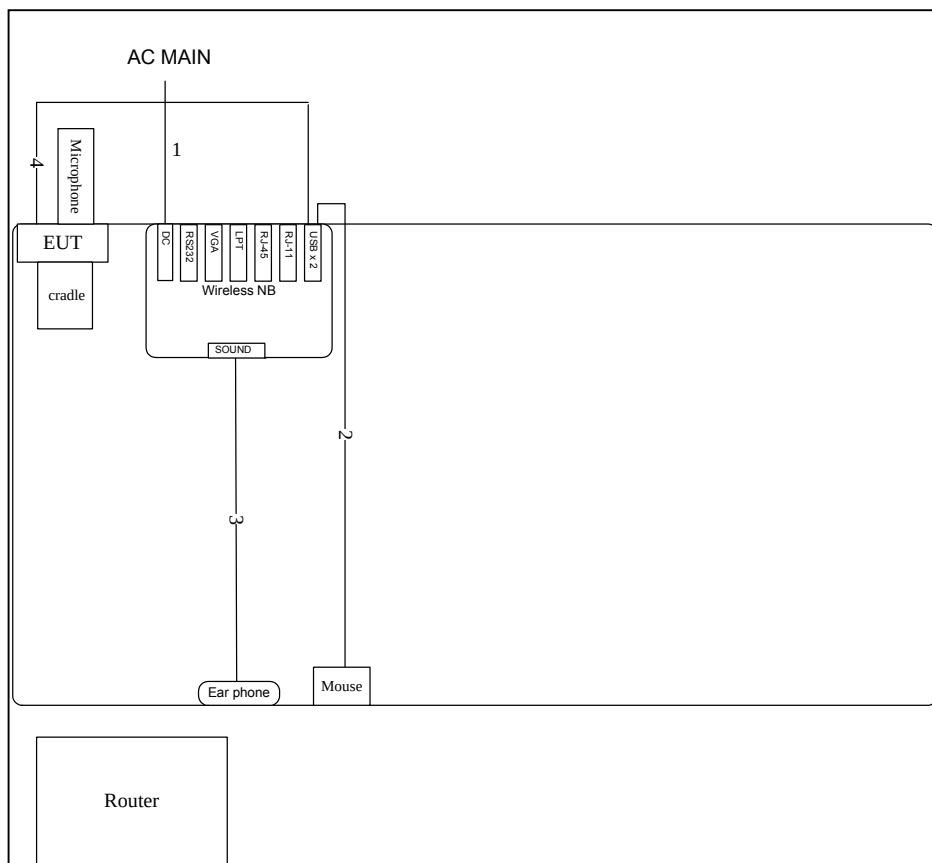

Item	Connection	Shield	Length
1	Power cable	No	2.6M
2	USB cable	No	1.8M
3	Earphones cable	No	1.1M
4	USB cable	Yes	1.8M

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

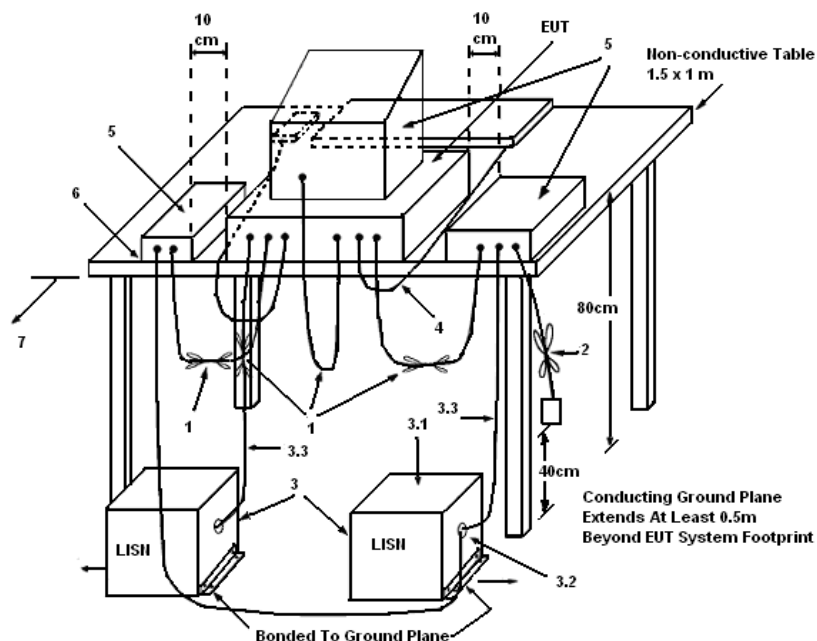

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	65%
Test Engineer	Simon Yang	Phase	Line
Configuration	Normal Link	Test Mode	Mode 2
Test Voltage	120V / 60Hz		

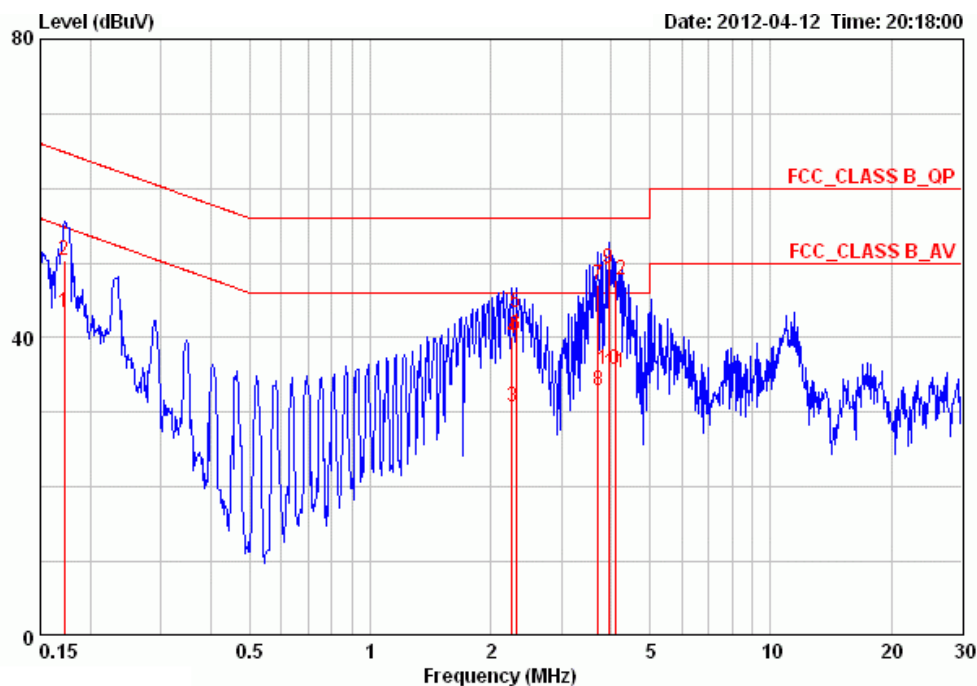

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.17215	43.47	-11.39	54.86	43.27	0.00	0.20	LINE	AVERAGE
2	0.17215	50.29	-14.57	64.86	50.09	0.00	0.20	LINE	QP
3	2.261	30.74	-15.26	46.00	30.54	0.00	0.20	LINE	AVERAGE
4	2.261	40.00	-16.00	56.00	39.80	0.00	0.20	LINE	QP
5	2.309	43.39	-12.61	56.00	43.19	0.00	0.20	LINE	QP
6	2.309	40.24	-5.76	46.00	40.04	0.00	0.20	LINE	AVERAGE
7	3.700	46.98	-9.02	56.00	46.68	0.00	0.30	LINE	QP
8	3.700	32.91	-13.09	46.00	32.61	0.00	0.30	LINE	AVERAGE
9	3.931	49.28	-6.72	56.00	48.98	0.00	0.30	LINE	QP
10	3.931	35.83	-10.17	46.00	35.53	0.00	0.30	LINE	AVERAGE
11	4.105	35.39	-10.61	46.00	35.09	0.00	0.30	LINE	AVERAGE
12	4.105	47.64	-8.36	56.00	47.34	0.00	0.30	LINE	QP

Temperature	23°C	Humidity	65%
Test Engineer	Simon Yang	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 2
Test Voltage	120V / 60Hz		

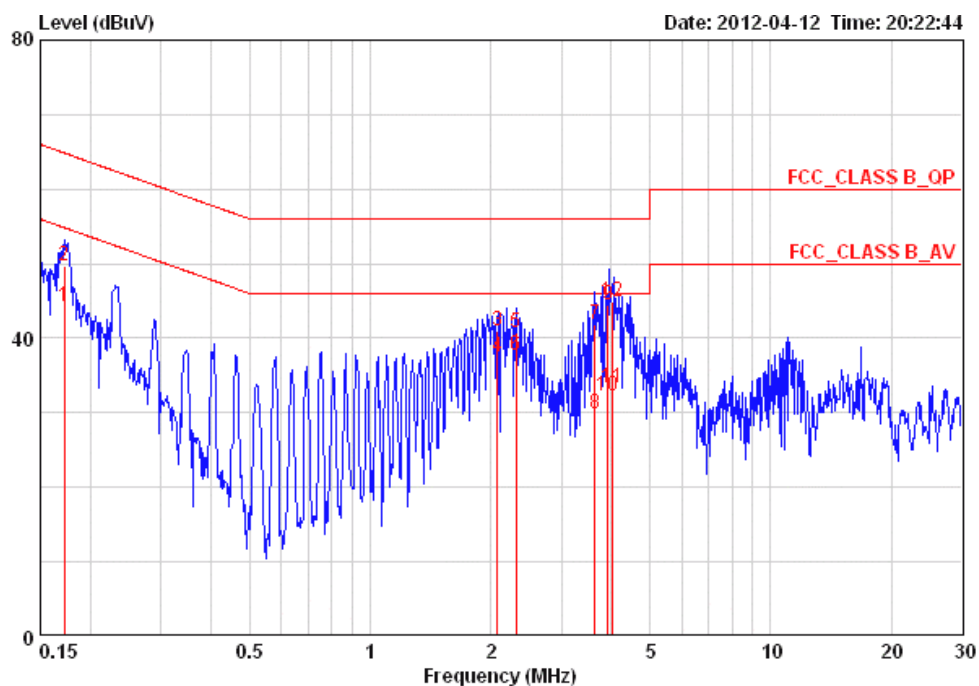

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.17215	44.19	-10.67	54.86	43.99	0.00	0.20	NEUTRAL	AVERAGE
2	0.17215	49.79	-15.07	64.86	49.59	0.00	0.20	NEUTRAL	QP
3	2.076	40.94	-15.06	56.00	40.74	0.00	0.20	NEUTRAL	QP
4	2.076	37.57	-8.43	46.00	37.37	0.00	0.20	NEUTRAL	AVERAGE
5	2.309	40.86	-15.14	56.00	40.66	0.00	0.20	NEUTRAL	QP
6	2.309	37.75	-8.25	46.00	37.55	0.00	0.20	NEUTRAL	AVERAGE
7	3.639	41.86	-14.14	56.00	41.56	0.00	0.30	NEUTRAL	QP
8	3.639	29.97	-16.03	46.00	29.67	0.00	0.30	NEUTRAL	AVERAGE
9	3.925	44.57	-11.43	56.00	44.27	0.00	0.30	NEUTRAL	QP
10	3.925	32.29	-13.71	46.00	31.99	0.00	0.30	NEUTRAL	AVERAGE
11	4.041	33.44	-12.56	46.00	33.14	0.00	0.30	NEUTRAL	AVERAGE
12	4.041	44.91	-11.09	56.00	44.61	0.00	0.30	NEUTRAL	QP

Note: Level = Read Level + LISN Factor + Cable Loss

4.2. 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 300 kHz and the video bandwidth of 1000 kHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.

4.2.4. Test Setup Layout

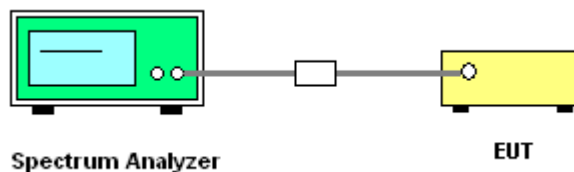

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 99% Occupied Bandwidth

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.64	18.08
40	5200 MHz	23.04	18.24
48	5240 MHz	22.08	18.08
52	5260 MHz	20.48	17.92
60	5300 MHz	20.48	17.92
64	5320 MHz	20.48	17.92
100	5500 MHz	20.48	17.92
116	5580 MHz	20.48	17.92
140	5700 MHz	20.48	17.92

Configuration IEEE 802.11n MCS0 40MHz / Ant. 1


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	40.64	36.48
46	5230 MHz	50.88	36.48
54	5270 MHz	40.96	36.48
62	5310 MHz	40.64	36.48
102	5510 MHz	40.64	36.48
110	5550 MHz	40.64	36.48
134	5670 MHz	40.64	36.48

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Ant. 1


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	22.40	16.96
40	5200 MHz	24.96	17.12
48	5240 MHz	24.16	16.96
52	5260 MHz	20.16	16.96
60	5300 MHz	20.00	16.96
64	5320 MHz	20.00	16.96
100	5500 MHz	21.12	16.96
116	5580 MHz	20.16	17.12
140	5700 MHz	20.00	16.96

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 / 5180 MHz

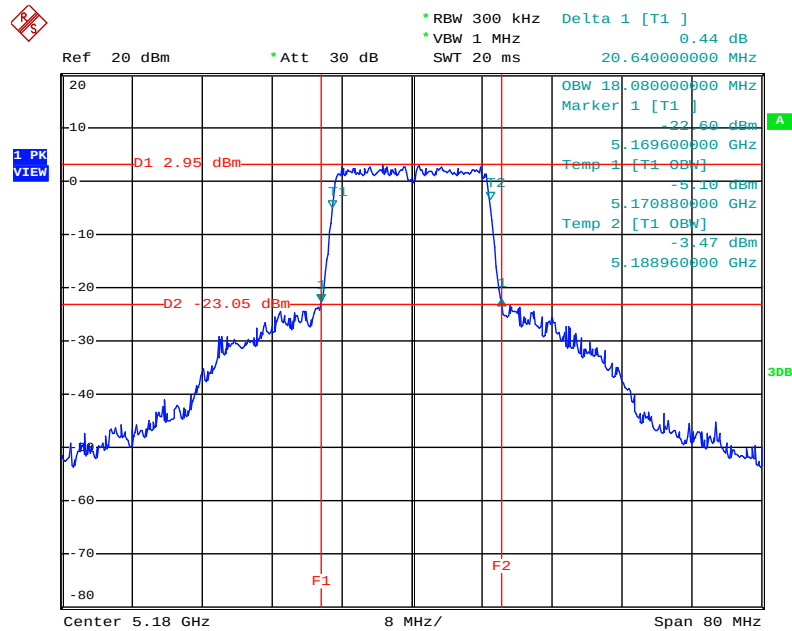


Date: 19.APR.2012 23:26:56

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 / 5200 MHz

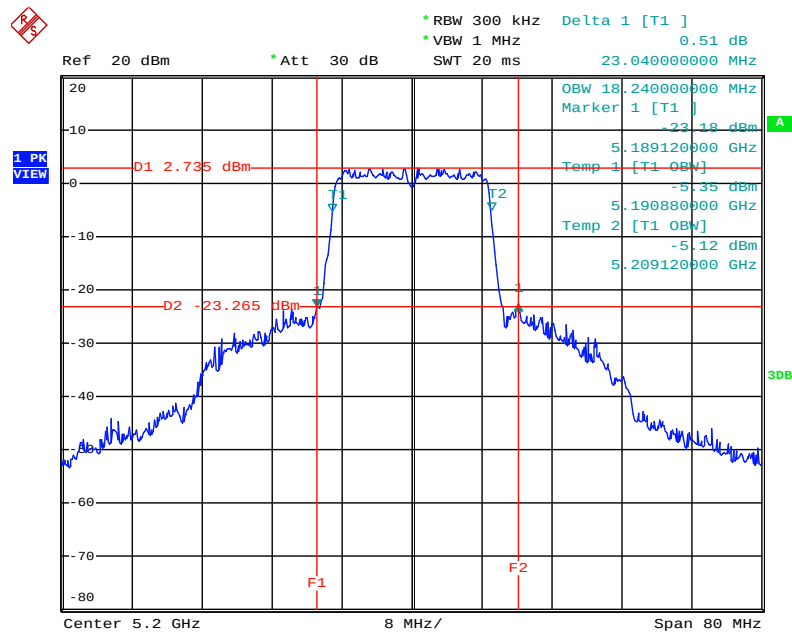


Date: 19.APR.2012 23:26:00

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 / 5240 MHz

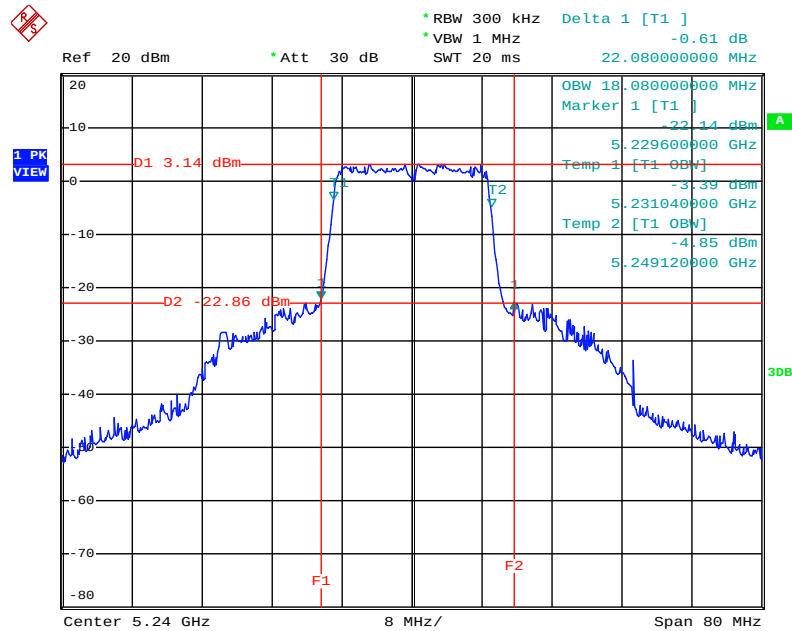


Date: 19.APR.2012 23:24:55

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 / 5260 MHz

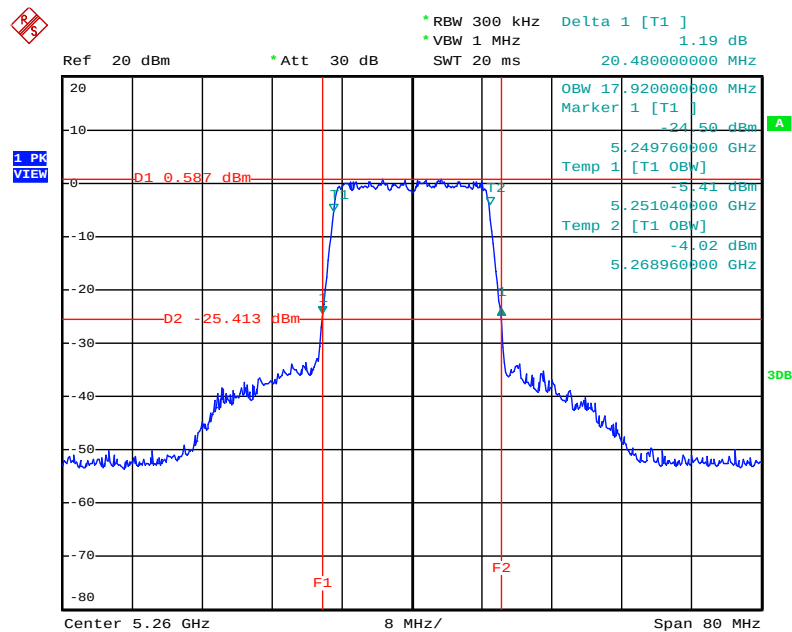


Date: 23.JUN.2012 16:45:30

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 / 5300 MHz

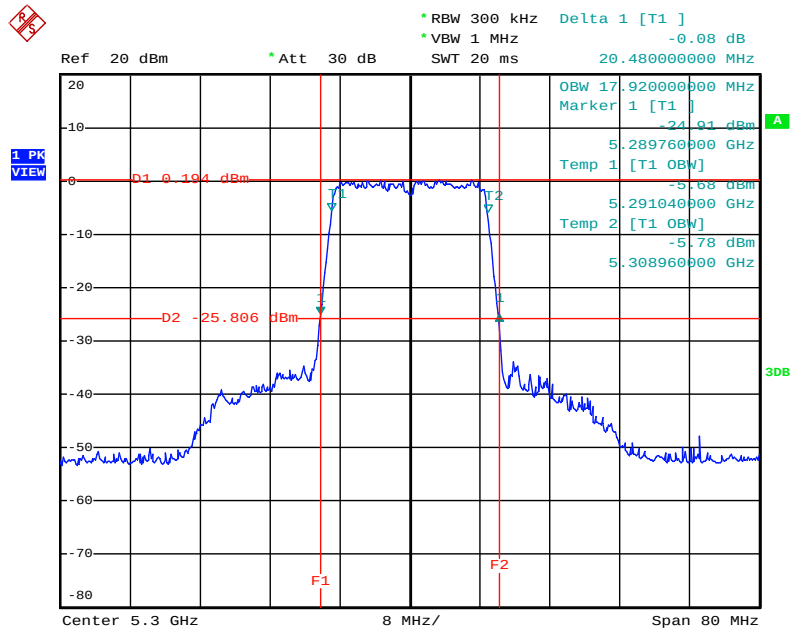


Date: 23.JUN.2012 16:41:39

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 / 5320 MHz

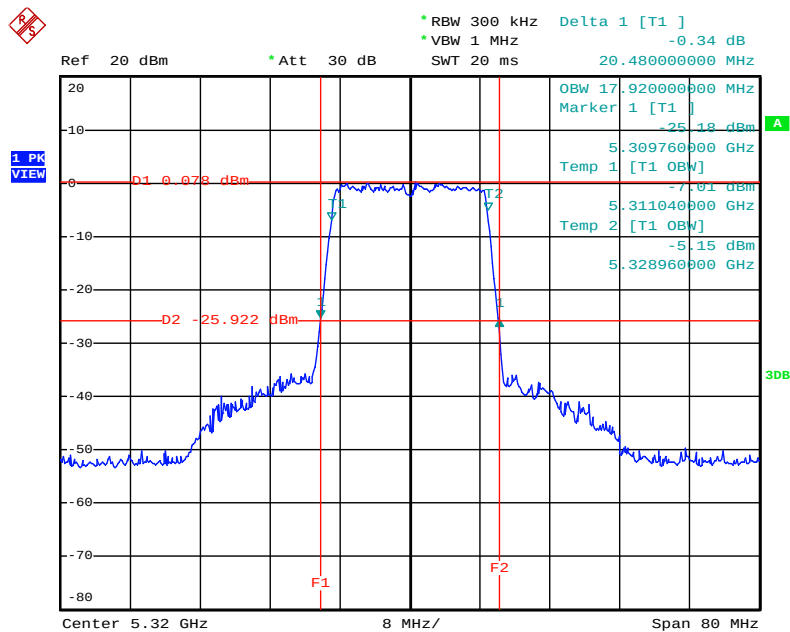


Date: 23.JUN.2012 16:40:43

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 / 5500 MHz

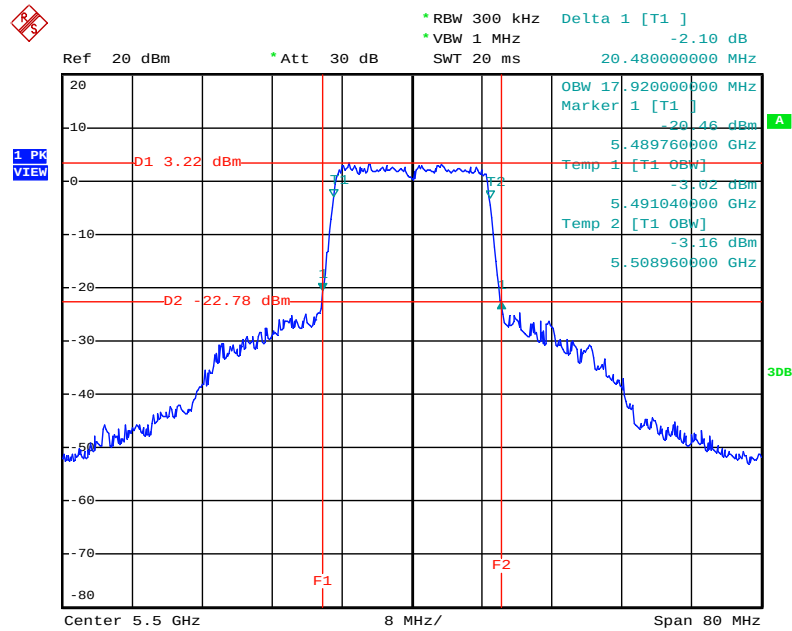


Date: 23.JUN.2012 16:34:25

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 / 5580 MHz

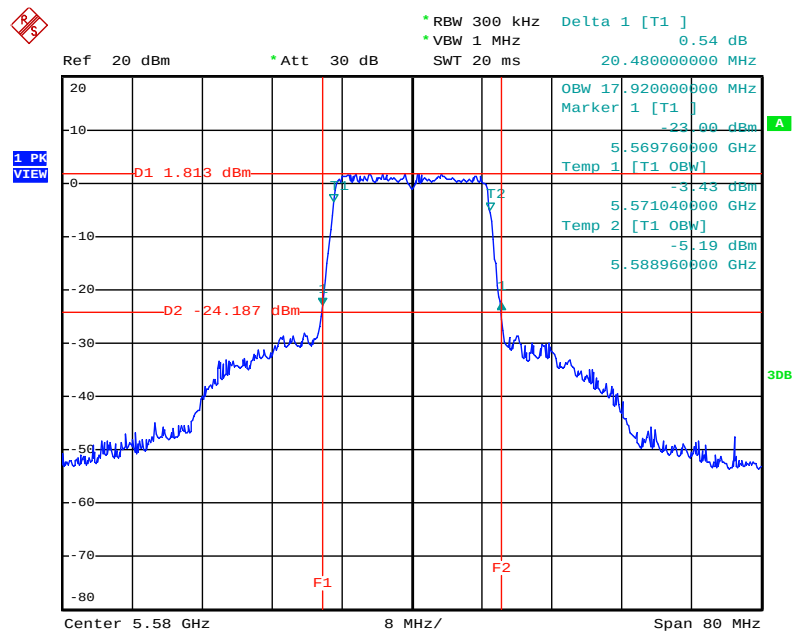


Date: 23.JUN.2012 16:36:07

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 / 5700 MHz

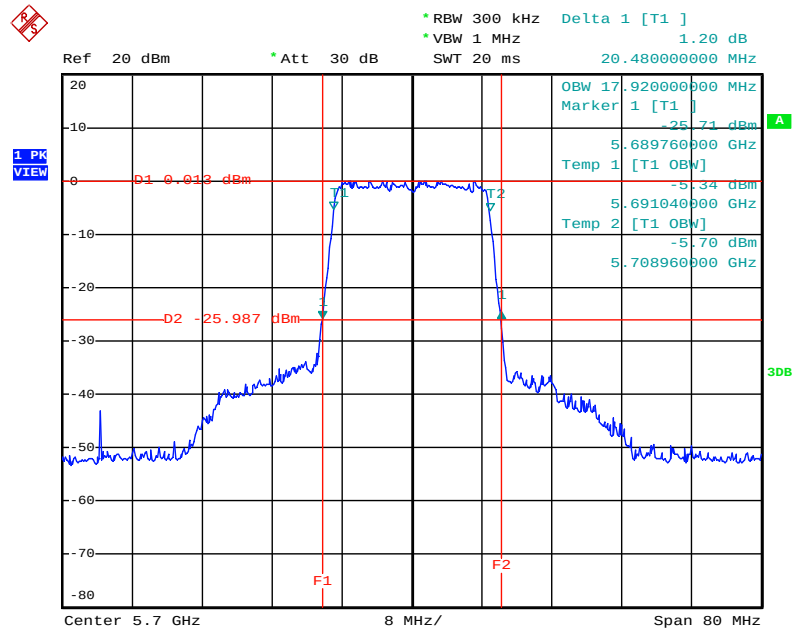


Date: 23.JUN.2012 16:32:55

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 / 5190 MHz

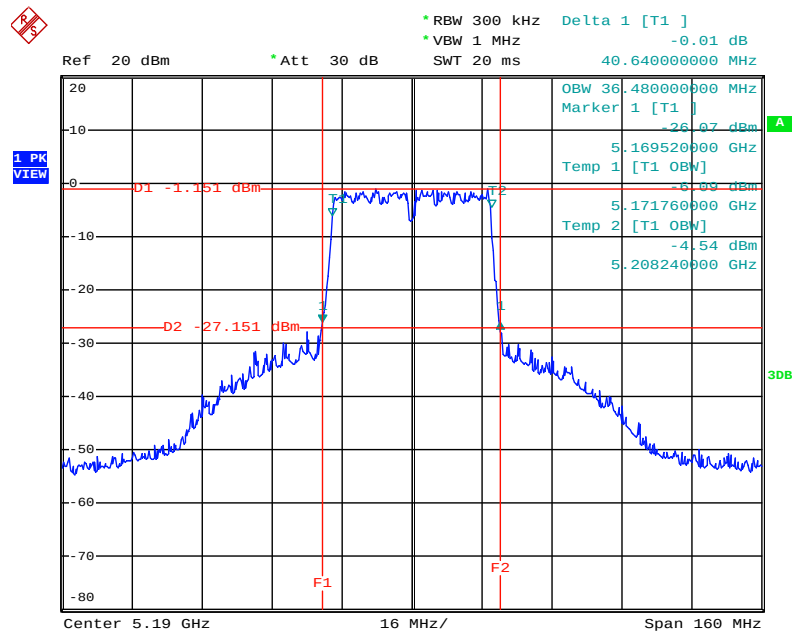


Date: 19.APR.2012 23:28:27

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 / 5230 MHz

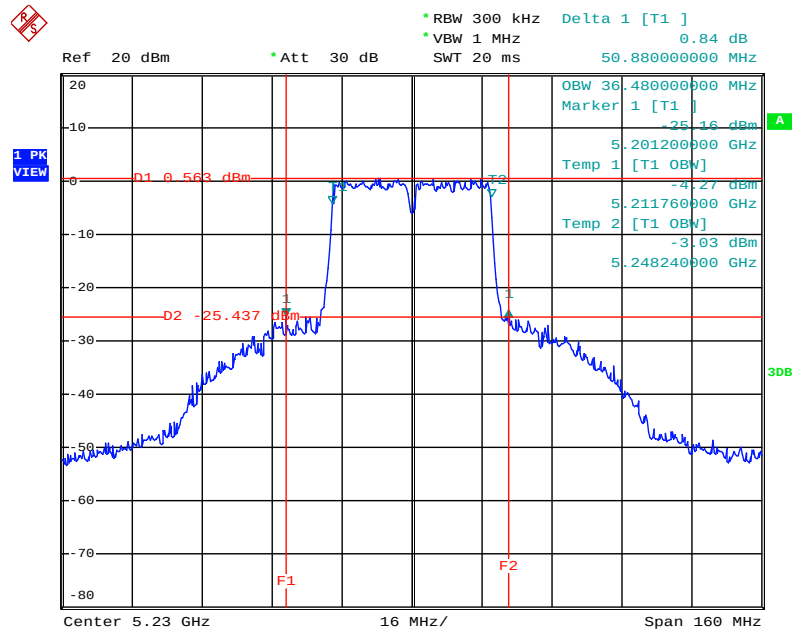


Date: 19.APR.2012 23:29:24

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 / 5270 MHz

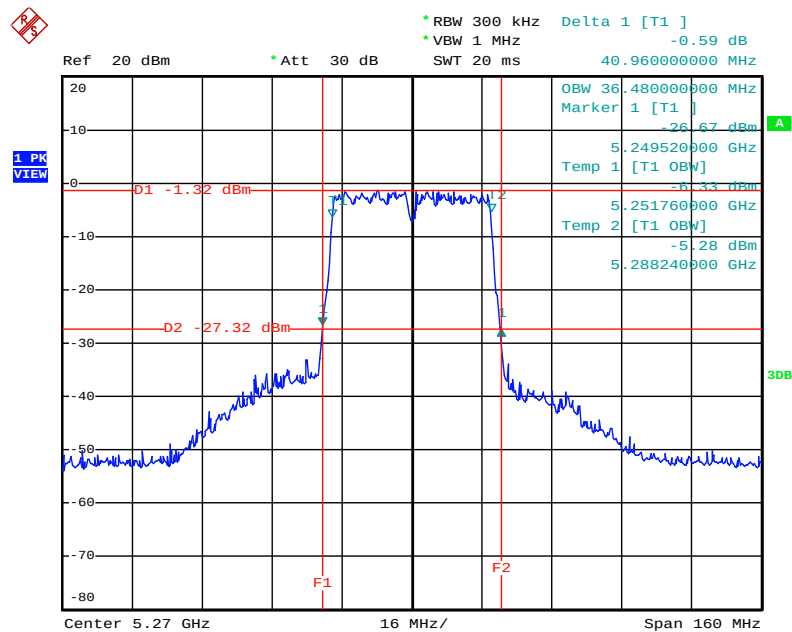


Date: 23.JUN.2012 16:47:35

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 / 5310 MHz

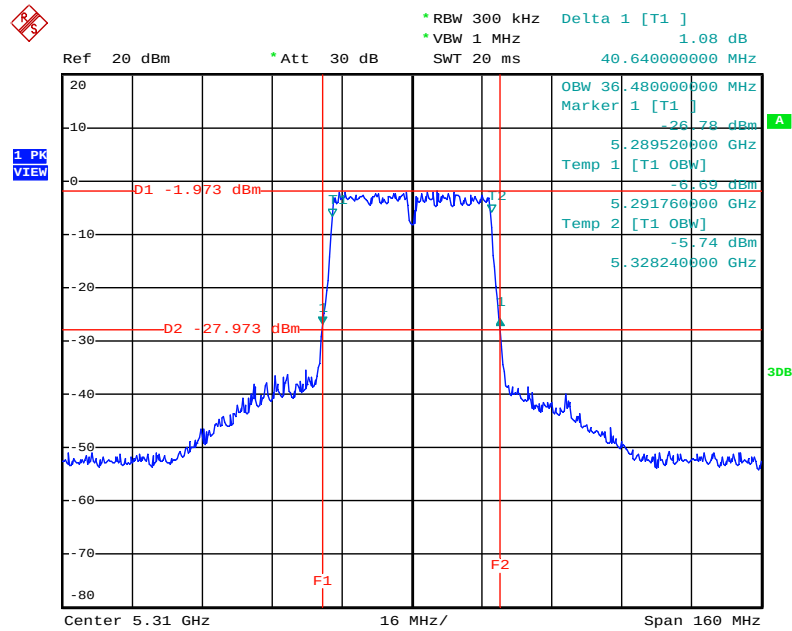


Date: 23.JUN.2012 16:51:10

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 / 5510 MHz

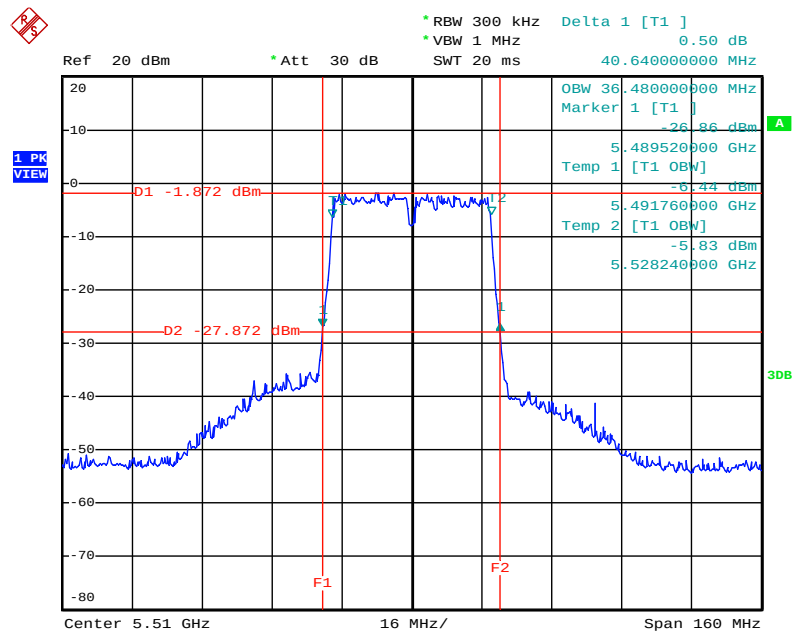


Date: 23.JUN.2012 16:56:02

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 / 5550 MHz

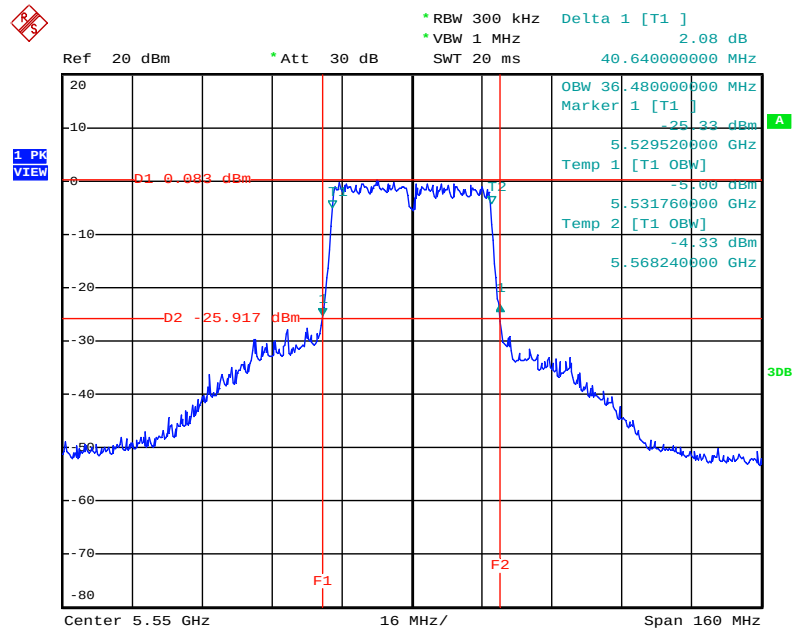


Date: 23.JUN.2012 17:08:04

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 / 5670 MHz

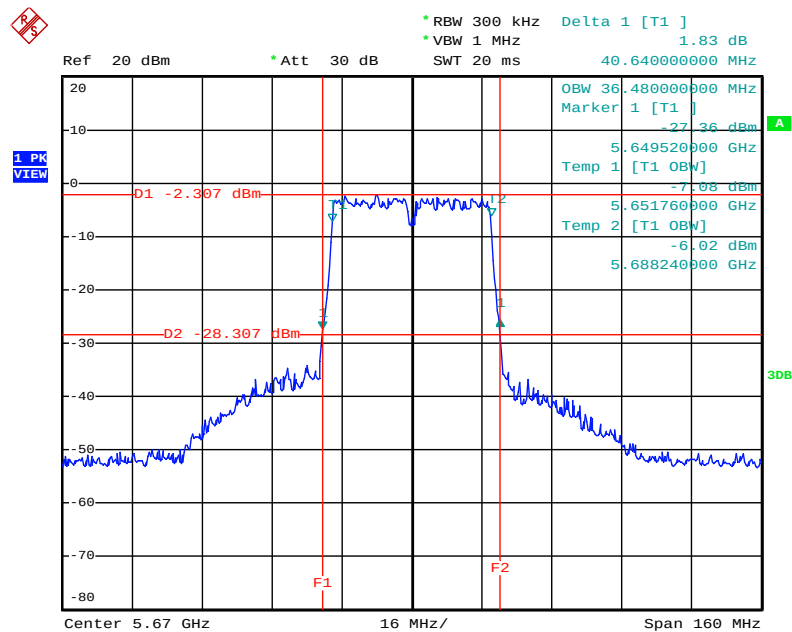


Date: 23.JUN.2012 17:10:45

26 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5180 MHz

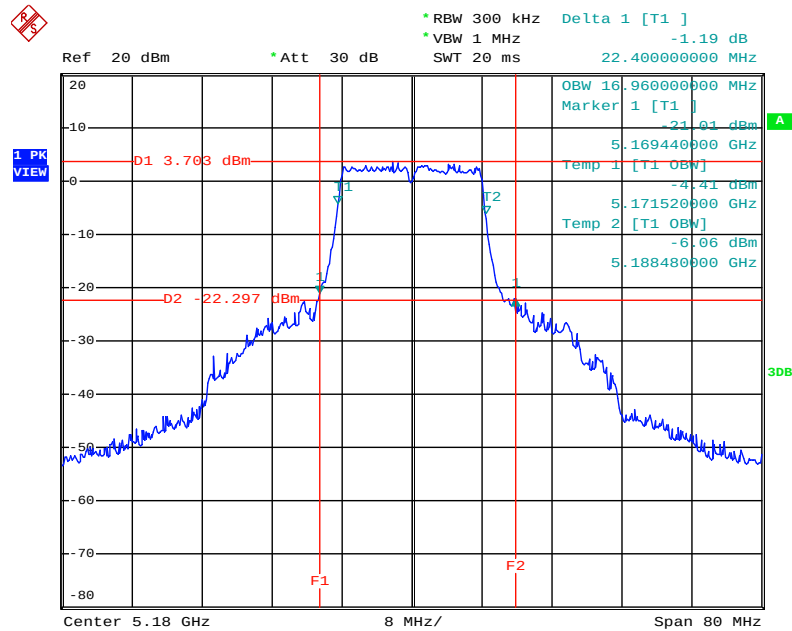


Date: 19.APR.2012 23:21:34

26 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5200 MHz

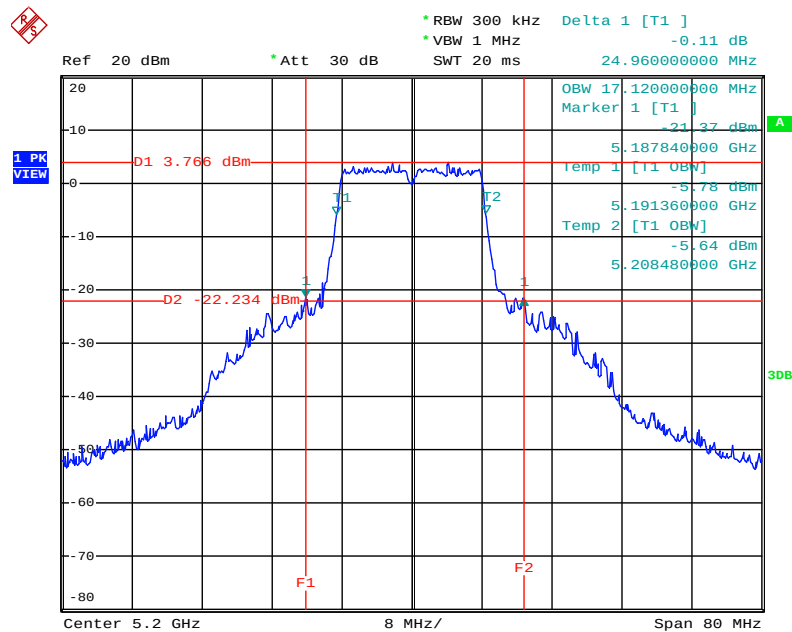


Date: 19.APR.2012 23:22:41

26 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5240 MHz

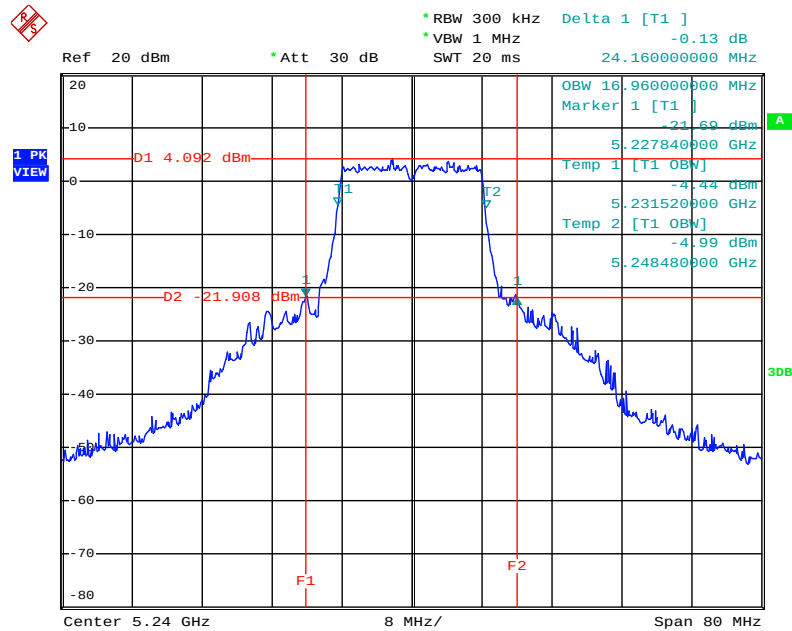


Date: 19.APR.2012 23:23:32

26 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5260 MHz

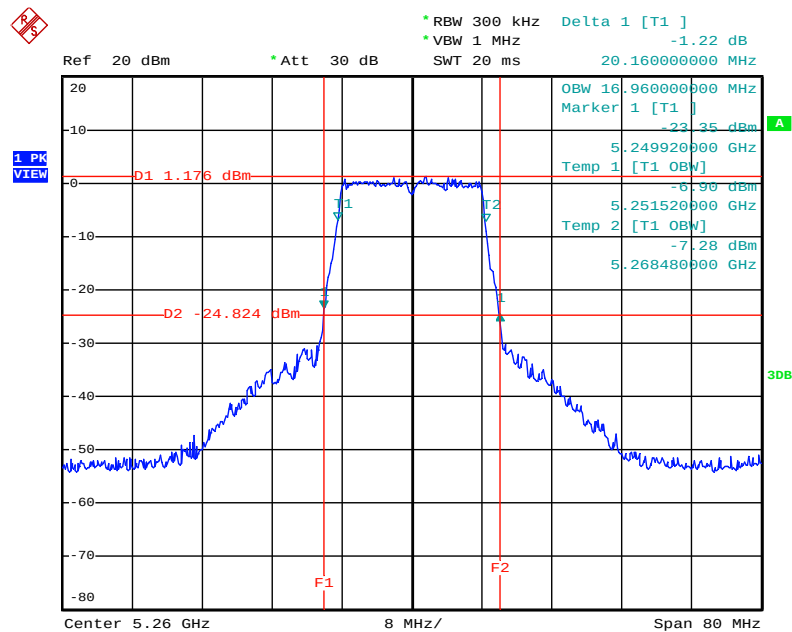


Date: 23.JUN.2012 16:15:32

26 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5300 MHz

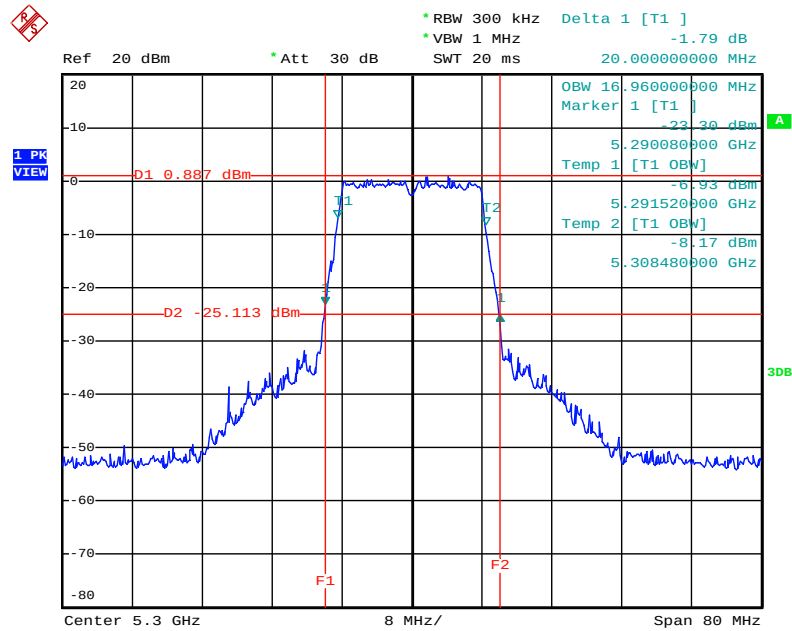


Date: 23.JUN.2012 16:17:18

26 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5320 MHz

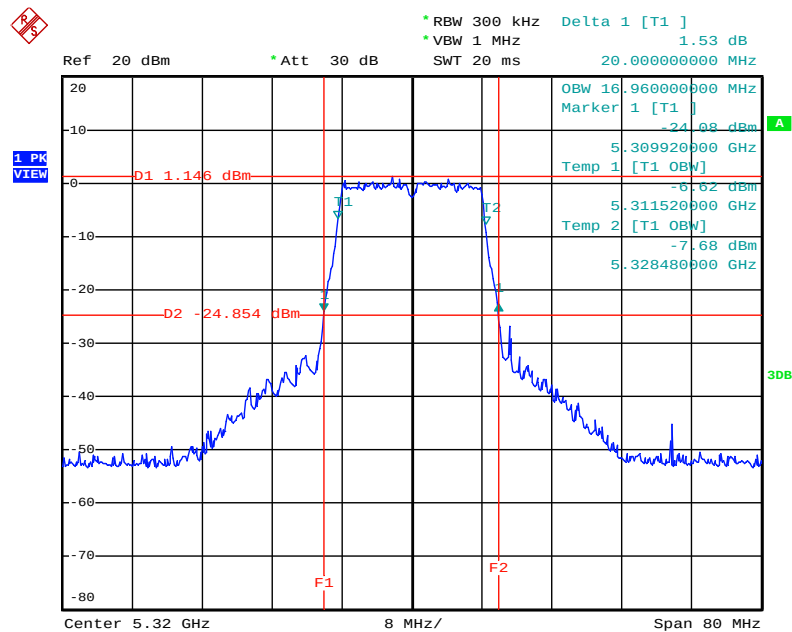


Date: 23.JUN.2012 16:24:04

26 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5500 MHz

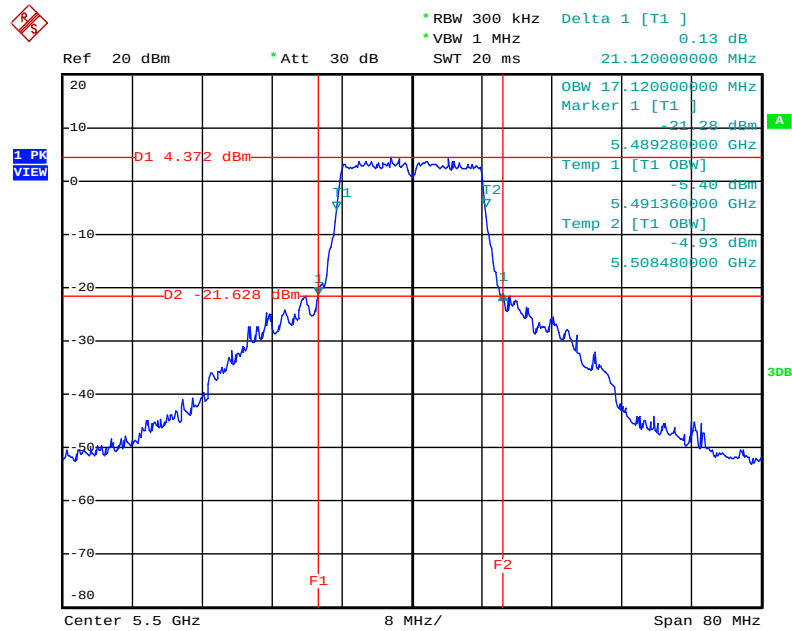


Date: 23.JUN.2012 16:25:44

26 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5580 MHz

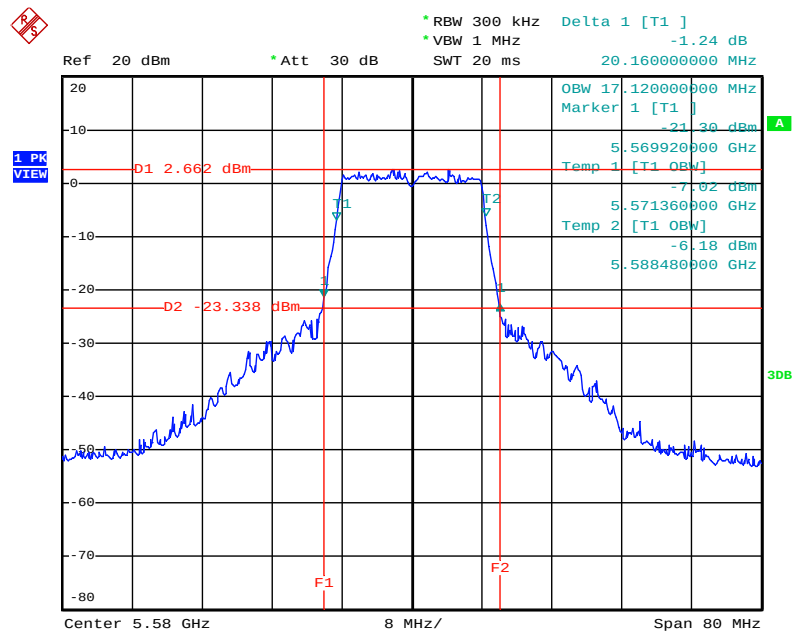

Date: 23.JUN.2012 16:28:07

26 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5700 MHz

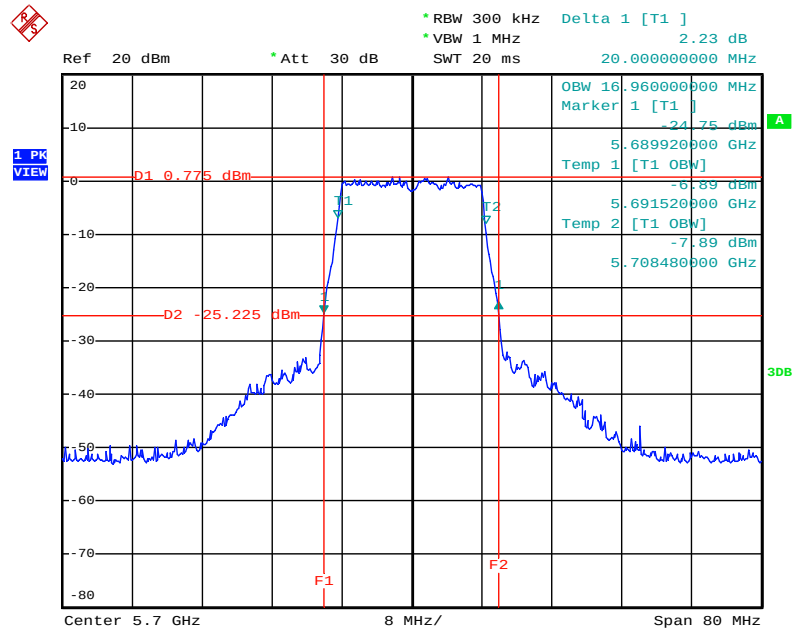

Date: 23.JUN.2012 16:30:08

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or $4 \text{ dBm} + 10\log B$, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.470-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or $11 \text{ dBm} + 10\log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725~5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W or $17 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 17 dBm in any 1MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain up to 23 dBi without any corresponding reduction in the transmitter peak output power or peak power spectral density. For fixed, point-to-point U-NII transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in peak transmitter power and peak power spectral density for each 1 dB of antenna gain in excess of 23 dBi would be required.

4.3.2. Measuring Instruments and Setting


The following table is the setting of the peak power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	AVERAGE

4.3.3. Test Procedures

Spectrum Parameter	Setting
RF Output Power Method	☒ ANSI C63.10 clause 6.10.2.1 (a) power meter method
RF Output Power Method	☐ ANSI C63.10 clause 6.10.2.1 (b) channel integration method
RF Output Power Method	☐ ANSI C63.10 clause 6.10.3.1 Method 1 - spectral trace averaging
RF Output Power Method	☐ ANSI C63.10 clause 6.10.3.2 Method 2 - zero-span mode with trace averaging

4.3.4. Test Setup Layout



4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n
Test Date	Apr. 19, 2012		

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	15.06	17.00	Complies
40	5200 MHz	14.80	17.00	Complies
48	5240 MHz	15.04	17.00	Complies
52	5260 MHz	13.81	24.00	Complies
60	5300 MHz	12.56	24.00	Complies
64	5320 MHz	13.09	24.00	Complies
100	5500 MHz	15.22	24.00	Complies
116	5580 MHz	13.48	24.00	Complies
140	5700 MHz	13.08	24.00	Complies

Configuration IEEE 802.11n MCS0 40MHz / Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	13.90	17.00	Complies
46	5230 MHz	14.53	17.00	Complies
54	5270 MHz	13.89	24.00	Complies
62	5310 MHz	13.31	24.00	Complies
102	5510 MHz	12.43	24.00	Complies
110	5550 MHz	14.21	24.00	Complies
134	5670 MHz	13.55	24.00	Complies

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11a
Test Date	Apr. 19, 2012		

Configuration IEEE 802.11a / Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	15.03	17.00	Complies
40	5200 MHz	15.00	17.00	Complies
48	5240 MHz	15.18	17.00	Complies
52	5260 MHz	13.68	24.00	Complies
60	5300 MHz	12.86	24.00	Complies
64	5320 MHz	13.13	24.00	Complies
100	5500 MHz	15.26	24.00	Complies
116	5580 MHz	14.00	24.00	Complies
140	5700 MHz	13.51	24.00	Complies

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4
5.25-5.35 GHz	11
5470-5725	11

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The test procedure is the same as section 4.6.3.
2. Trace A, Set RBW =1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
3. Delta Mark trace A Maximum frequency and trace B same frequency.
4. Repeat the above procedure until measurements for all frequencies were complete.

4.4.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
36	5180 MHz	-0.25	4.00	Complies
40	5200 MHz	-0.38	4.00	Complies
48	5240 MHz	0.15	4.00	Complies
52	5260 MHz	-0.09	11.00	Complies
60	5300 MHz	-0.50	11.00	Complies
64	5320 MHz	-0.15	11.00	Complies
100	5500 MHz	2.21	11.00	Complies
116	5580 MHz	1.02	11.00	Complies
140	5700 MHz	-0.71	11.00	Complies

Configuration IEEE 802.11n MCS0 40MHz / Ant. 1

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
38	5190 MHz	-4.25	4.00	Complies
46	5230 MHz	-3.04	4.00	Complies
54	5270 MHz	-1.55	11.00	Complies
62	5310 MHz	-2.58	11.00	Complies
102	5510 MHz	-2.74	11.00	Complies
110	5550 MHz	-0.89	11.00	Complies
134	5670 MHz	-3.29	11.00	Complies

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11a


Configuration IEEE 802.11a / Ant. 1

Channel	Frequency	Power Density (dBm)	Max. Limit(dBm)	Result
36	5180 MHz	-0.04	4.00	Complies
40	5200 MHz	-0.39	4.00	Complies
48	5240 MHz	0.50	4.00	Complies
52	5260 MHz	0.21	11.00	Complies
60	5300 MHz	0.08	11.00	Complies
64	5320 MHz	-0.05	11.00	Complies
100	5500 MHz	2.94	11.00	Complies
116	5580 MHz	1.33	11.00	Complies
140	5700 MHz	-0.61	11.00	Complies

Note: All the test values were listed in the report.


For plots, only the channel with maximum results was shown.

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 / 5240 MHz

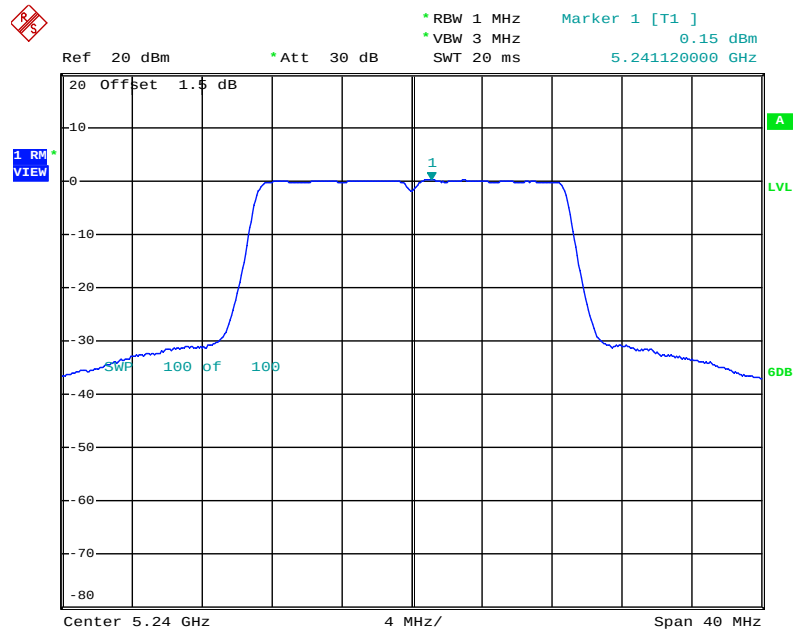


Date: 19.APR.2012 23:35:16

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 / 5260 MHz

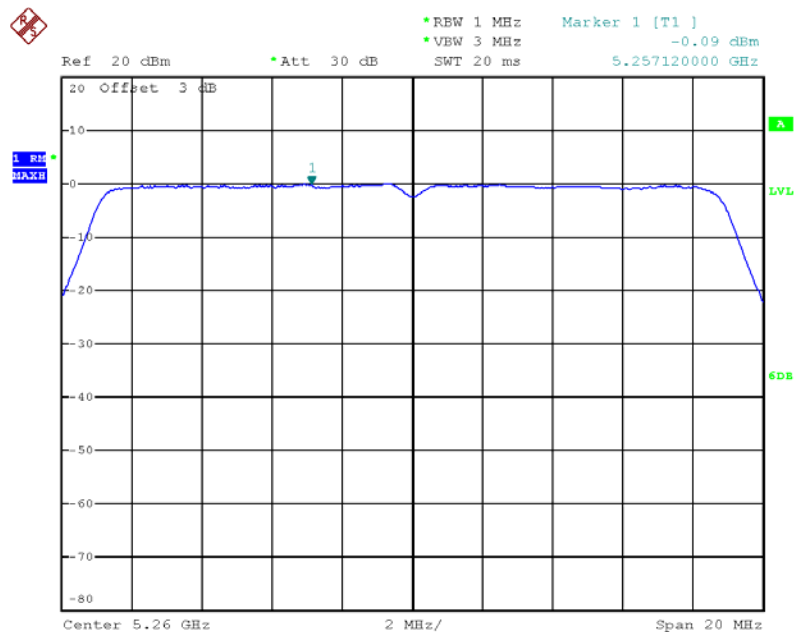


Date: 23.JUN.2012 16:44:52

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 / 5500 MHz

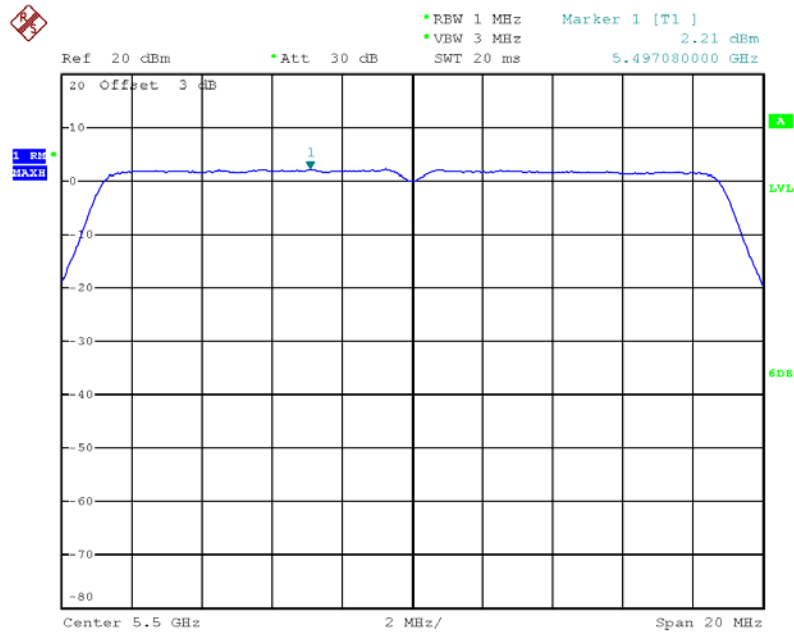


Date: 23.JUN.2012 16:34:50

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 / 5230 MHz

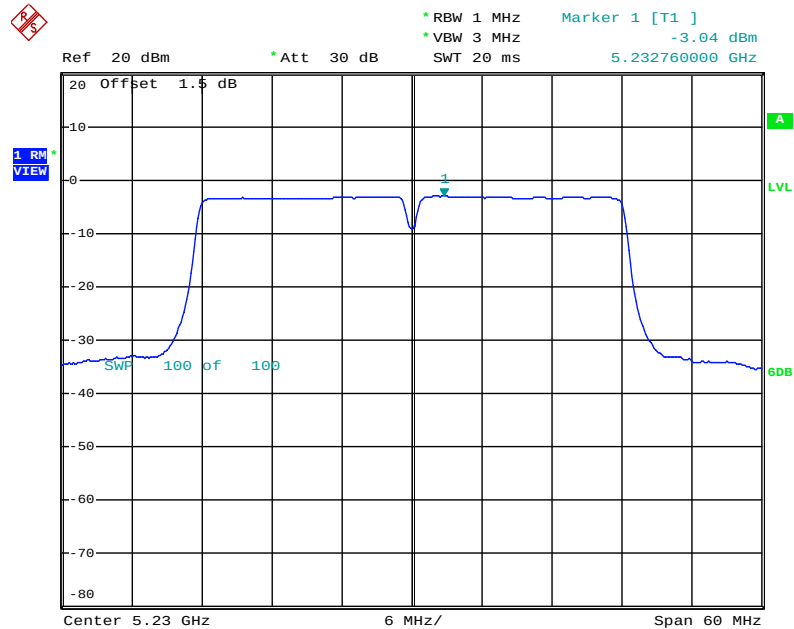


Date: 19.APR.2012 23:30:34

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 / 5270 MHz

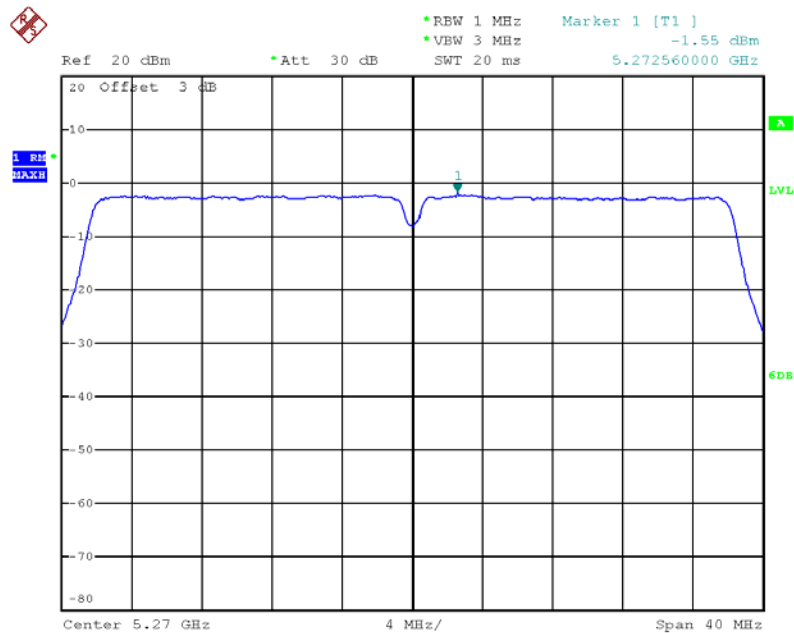


Date: 23.JUN.2012 16:48:40

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 / 5550 MHz

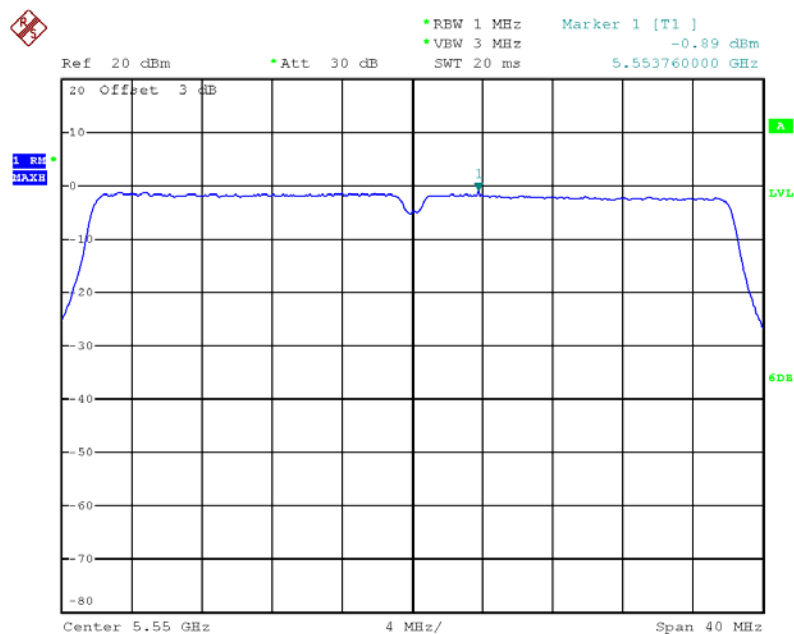


Date: 23.JUN.2012 17:08:31

Power Density Plot on Configuration IEEE 802.11a / Ant. 1 / 5240 MHz

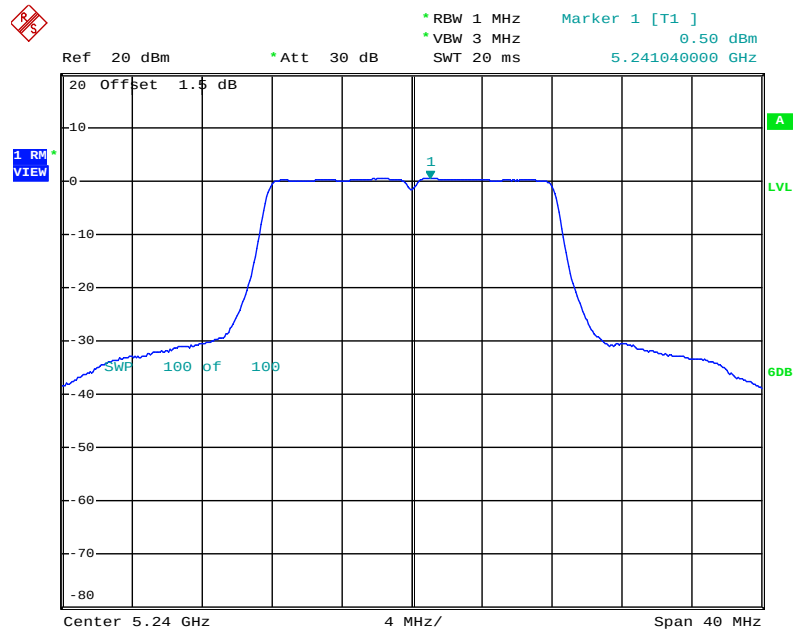


Date: 19.APR.2012 23:37:49

Power Density Plot on Configuration IEEE 802.11a / Ant. 1 / 5260 MHz

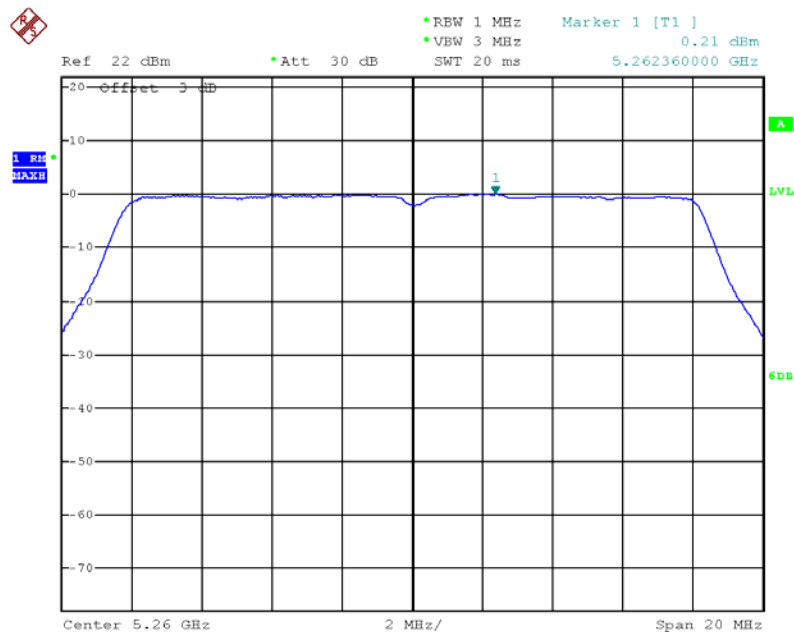

Date: 23.JUN.2012 16:14:33

Power Density Plot on Configuration IEEE 802.11a / Ant. 1 / 5500 MHz

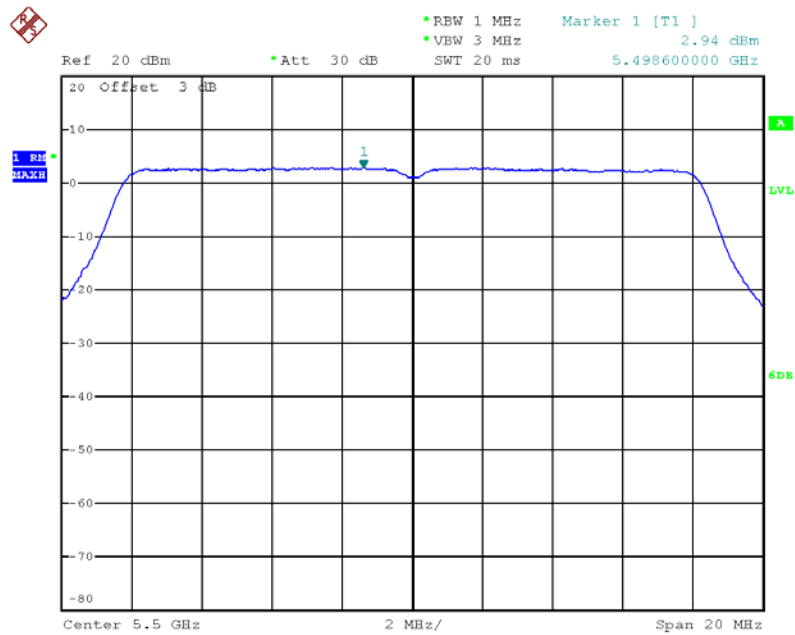

Date: 23.JUN.2012 16:26:06

4.5. Peak Excursion Measurement

4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 300 kHz (Average Trace)
Detector	Peak (Peak Trace) / Sample (Average Trace)
Trace	Max Hold
Sweep Time	60s

4.5.3. Test Procedures

1. The test procedure is the same as section 4.6.3.
2. Trace A, Set RBW =1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
3. Delta Mark trace A Maximum frequency and trace B same frequency.
4. Repeat the above procedure until measurements for all frequencies were complete.

4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Peak Excursion

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
36	5180 MHz	4.23	13	Complies
40	5200 MHz	4.87	13	Complies
48	5240 MHz	4.71	13	Complies
52	5260 MHz	5.02	13	Complies
60	5300 MHz	4.74	13	Complies
64	5320 MHz	5.10	13	Complies
100	5500 MHz	5.34	13	Complies
116	5580 MHz	4.46	13	Complies
140	5700 MHz	4.63	13	Complies

Configuration IEEE 802.11n MCS0 40MHz / Ant. 1

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
38	5190 MHz	5.16	13	Complies
46	5230 MHz	4.98	13	Complies
54	5270 MHz	4.88	13	Complies
62	5310 MHz	4.99	13	Complies
102	5510 MHz	5.04	13	Complies
110	5550 MHz	5.49	13	Complies
134	5670 MHz	4.21	13	Complies

Temperature	23°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	IEEE 802.11a


Configuration IEEE 802.11a / Ant. 1

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
36	5180 MHz	4.86	13	Complies
40	5200 MHz	4.50	13	Complies
48	5240 MHz	4.71	13	Complies
52	5260 MHz	4.96	13	Complies
60	5300 MHz	5.15	13	Complies
64	5320 MHz	4.53	13	Complies
100	5500 MHz	5.03	13	Complies
116	5580 MHz	5.16	13	Complies
140	5700 MHz	4.71	13	Complies

Note: All the test values were listed in the report.


For plots, only the channel with maximum results was shown.

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 / 5200 MHz

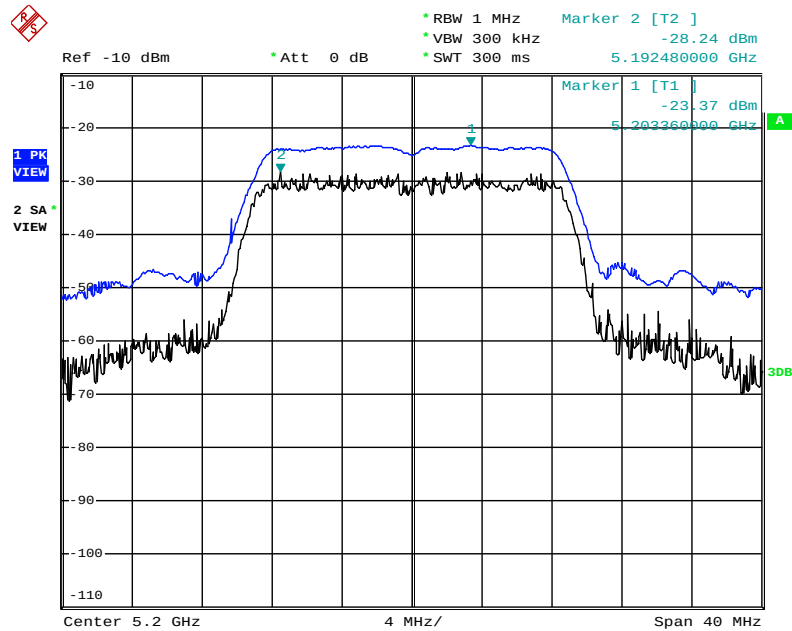


Date: 20.APR.2012 00:27:01

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 / 5320 MHz

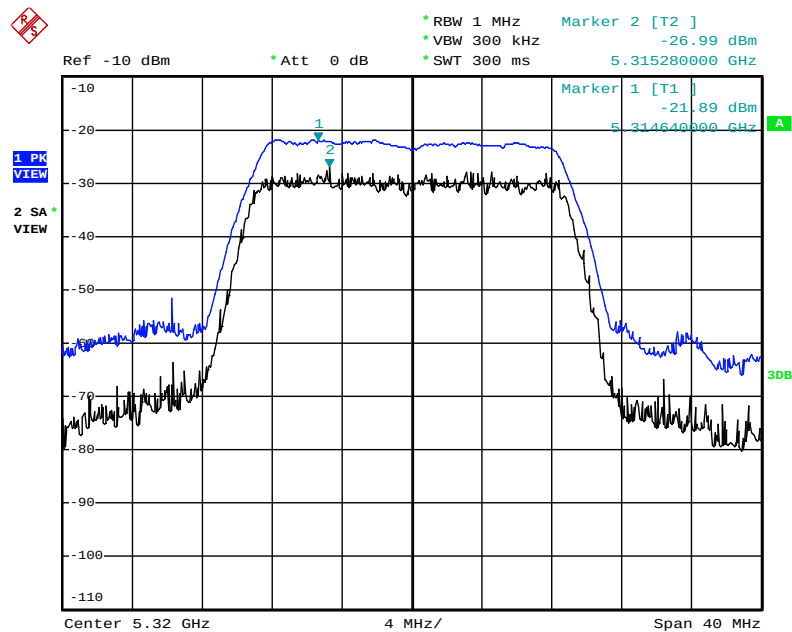


Date: 23.JUN.2012 17:24:46

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 / 5500 MHz

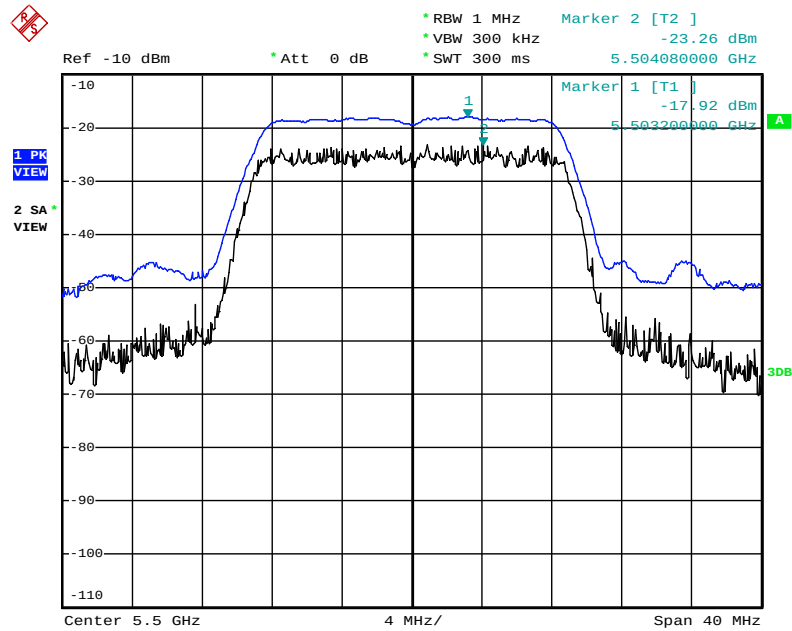


Date: 23.JUN.2012 17:25:47

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 / 5190 MHz

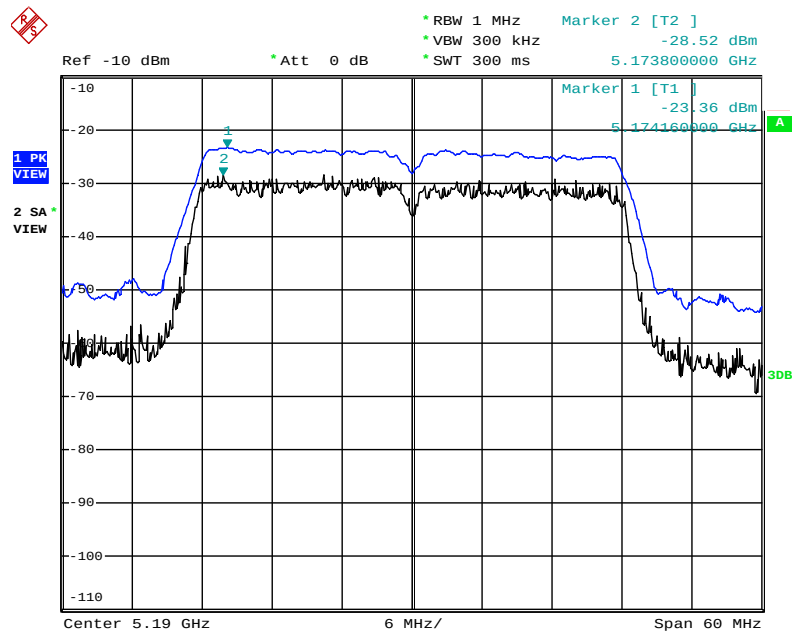


Date: 20.APR.2012 00:29:45

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 / 5310 MHz

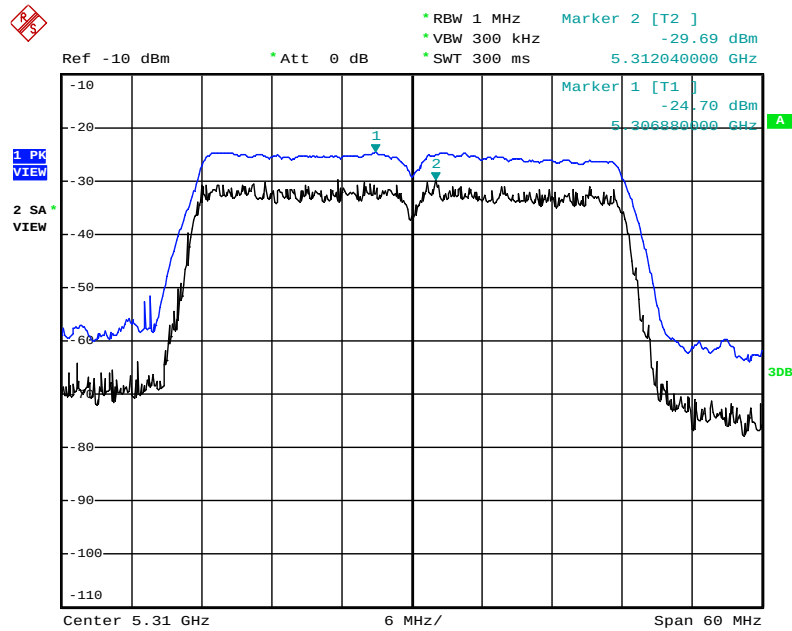


Date: 23.JUN.2012 17:19:31

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 / 5550 MHz

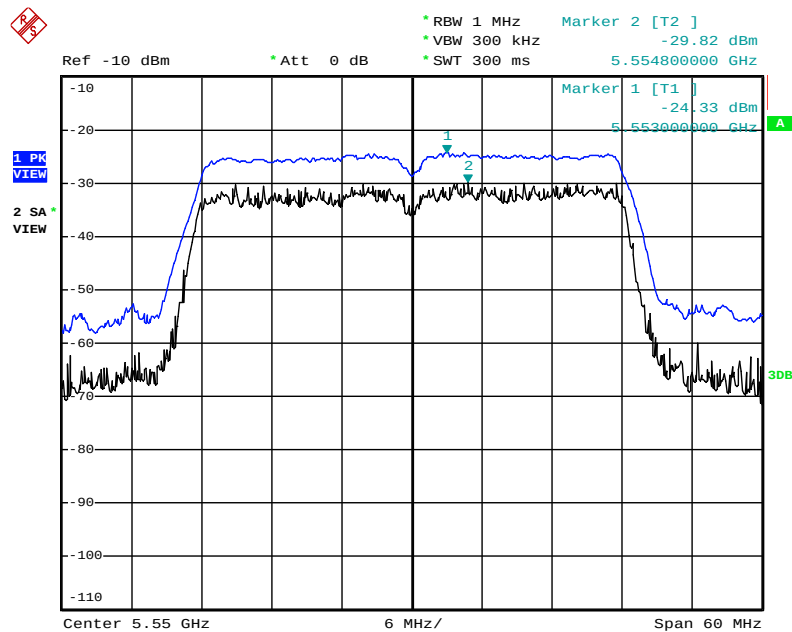


Date: 23.JUN.2012 17:17:25

Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 1 / 5180 MHz

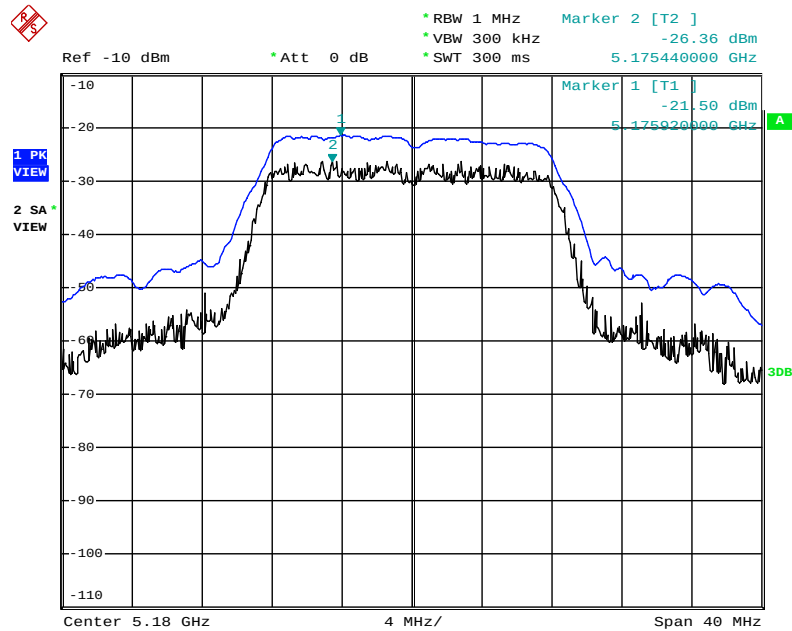


Date: 20.APR.2012 00:20:24

Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 1 / 5300 MHz

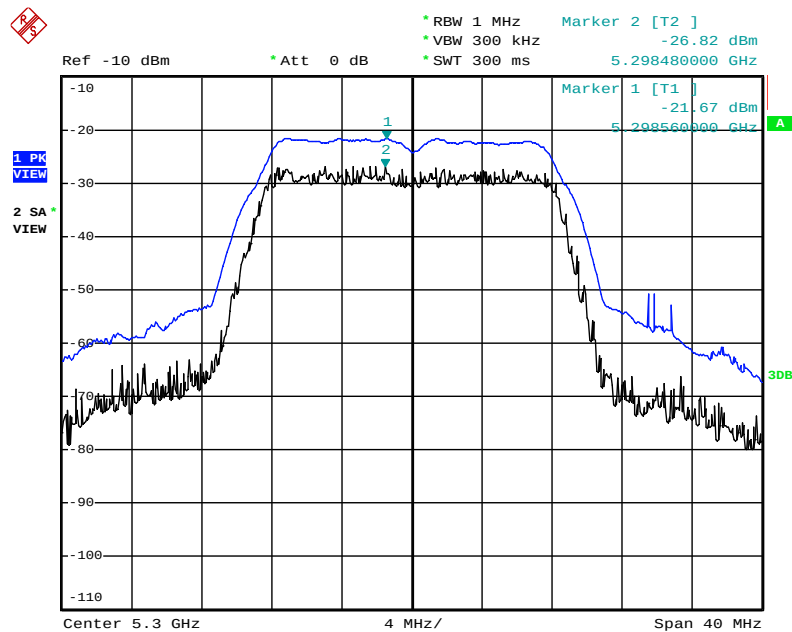

Date: 23.JUN.2012 17:33:52

Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 1 / 5580 MHz

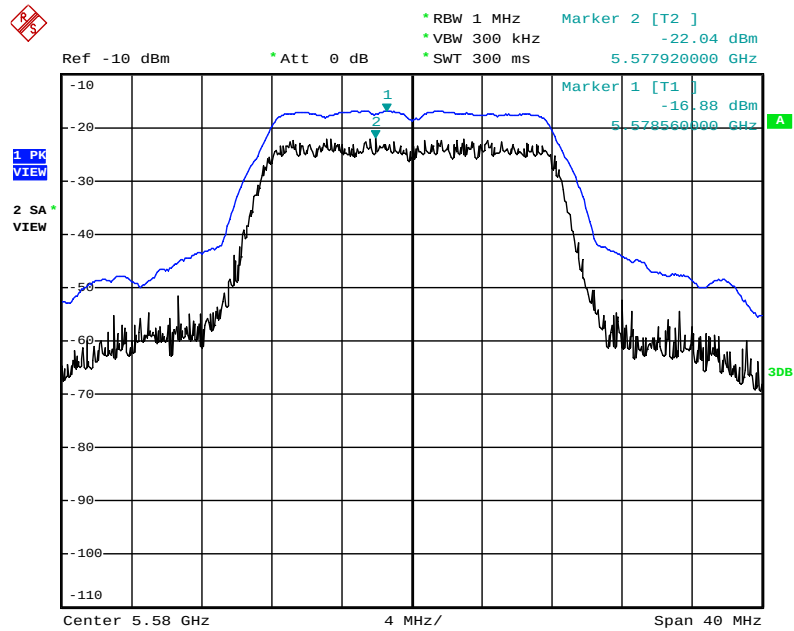

Date: 23.JUN.2012 17:30:28

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 1GHz

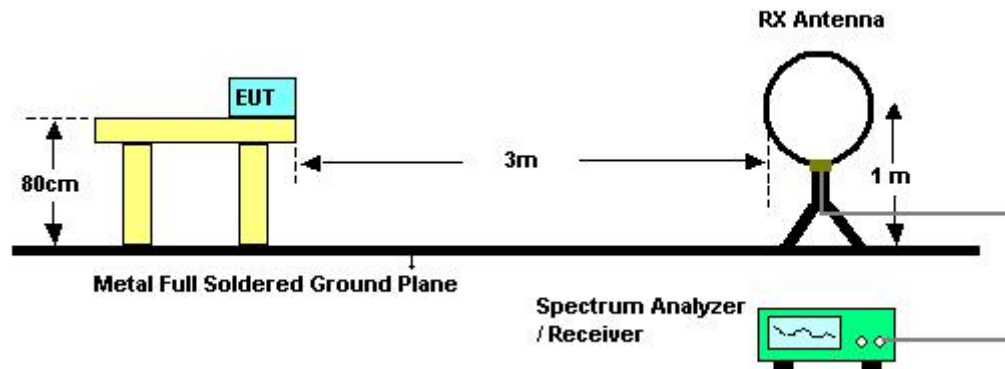

For radiated emissions above 1GHz

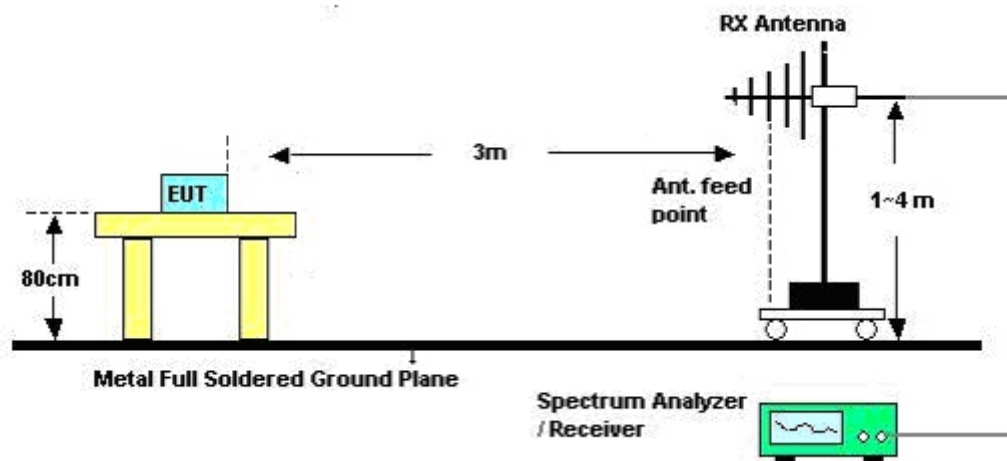

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	Normal Link
Test Date	Apr. 21, 2012		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	Normal Link
Test Mode	Mode 2		

Horizontal

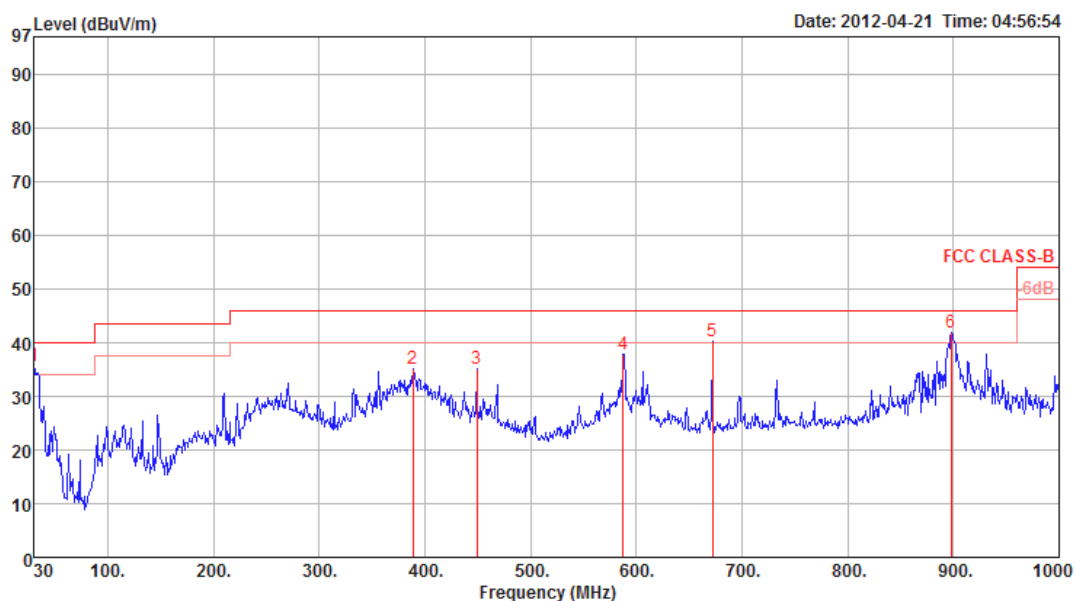

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	30.00	35.54	40.00	-4.46	45.26	0.83	27.80	17.25	0	400	Peak	HORIZONTAL
2	388.90	35.19	46.00	-10.81	43.80	2.95	27.52	15.96	0	400	Peak	HORIZONTAL
3	449.04	35.08	46.00	-10.92	42.76	3.24	27.85	16.93	0	400	Peak	HORIZONTAL
4	587.75	37.83	46.00	-8.17	42.97	3.68	28.10	19.28	0	400	Peak	HORIZONTAL
5	672.14	40.30	46.00	-5.70	44.68	4.02	28.03	19.63	0	400	Peak	HORIZONTAL
6	898.15	41.95	46.00	-4.05	43.77	4.59	27.40	20.99	0	400	Peak	HORIZONTAL

Vertical

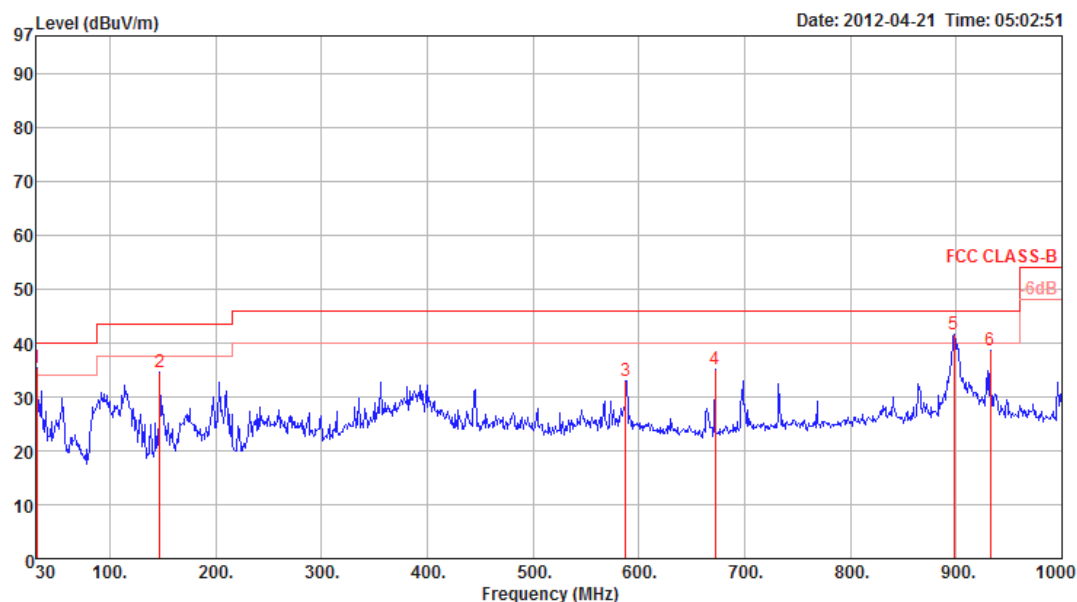

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	30.97	35.47	40.00	-4.53	45.17	0.85	27.80	17.25	0	100	Peak	VERTICAL
2	147.37	34.50	43.50	-9.00	49.46	1.78	27.36	10.62	0	100	Peak	VERTICAL
3	587.75	33.09	46.00	-12.91	38.23	3.68	28.10	19.28	0	100	Peak	VERTICAL
4	672.14	35.18	46.00	-10.82	39.56	4.02	28.03	19.63	0	100	Peak	VERTICAL
5	898.15	41.55	46.00	-4.45	43.37	4.59	27.40	20.99	0	100	Peak	VERTICAL
6	932.10	38.59	46.00	-7.41	39.96	4.76	27.27	21.14	0	100	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 36 / Ant. 1
Test Date	Apr. 18, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15530.87	50.53	74.00	-23.47	42.02	6.13	37.67	35.29	Peak	100	293	HORIZONTAL
2	15534.46	37.03	54.00	-16.97	28.52	6.13	37.67	35.29	Average	100	293	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15535.87	37.14	54.00	-16.86	28.57	6.13	37.73	35.29	Average	100	185	VERTICAL
2	15545.77	50.60	74.00	-23.40	42.09	6.13	37.69	35.31	Peak	100	185	VERTICAL

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 40 / Ant. 1
Test Date	Apr. 18, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15597.79	37.01	54.00	-16.99	28.62	6.13	37.60	35.34	Average	100	142	HORIZONTAL
2	15608.69	50.78	74.00	-23.22	42.41	6.13	37.58	35.34	Peak	100	142	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15596.44	36.96	54.00	-17.04	28.57	6.13	37.60	35.34	Average	100	94	VERTICAL
2	15597.28	51.12	74.00	-22.88	42.73	6.13	37.60	35.34	Peak	100	94	VERTICAL

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 48 / Ant. 1
Test Date	Apr. 18, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15712.31	37.11	54.00	-16.89	28.87	6.14	37.48	35.38	Average	100	81	HORIZONTAL
2	15722.15	51.60	74.00	-22.40	43.37	6.14	37.48	35.39	Peak	100	81	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15710.10	37.16	54.00	-16.84	28.92	6.14	37.48	35.38	Average	100	104	VERTICAL
2	15723.08	50.44	74.00	-23.56	42.21	6.14	37.48	35.39	Peak	100	104	VERTICAL

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 52 / Ant. 1
Test Date	Jun. 19, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna			A/Pos	T/Pos
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	Pol/Phase	cm	deg
1 p	15780.12	55.81	74.00	-18.19	44.45	7.93	35.01	38.44	Peak	HORIZONTAL	118	234
2 a	15782.04	42.25	54.00	-11.75	30.88	7.94	35.01	38.44	Average	HORIZONTAL	118	234

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna			A/Pos	T/Pos
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	Pol/Phase	cm	deg
1 p	15779.24	56.12	74.00	-17.88	44.76	7.93	35.01	38.44	Peak	VERTICAL	100	352
2 a	15782.50	42.15	54.00	-11.85	30.78	7.94	35.01	38.44	Average	VERTICAL	100	352

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 60 / Ant. 1
Test Date	Jun. 19, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna			A/Pos	T/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	Pol/Phase	cm	deg
1	10599.89	40.03	68.30	-28.27	30.07	6.60	35.12	38.48	Average	HORIZONTAL	102	245
2	10601.63	55.07	74.00	-18.93	45.09	6.60	35.10	38.48	Peak	HORIZONTAL	102	245
3 p	15898.00	56.05	74.00	-17.95	44.75	7.97	35.09	38.42	Peak	HORIZONTAL	102	183
4 a	15901.58	41.47	54.00	-12.53	30.16	7.98	35.09	38.42	Average	HORIZONTAL	102	183

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna			A/Pos	T/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	Pol/Phase	cm	deg
1 p	10597.81	56.21	68.30	-12.09	46.25	6.60	35.12	38.48	Peak	VERTICAL	100	70
2	10599.94	41.06	68.30	-27.24	31.10	6.60	35.12	38.48	Average	VERTICAL	100	70
3	15899.81	55.42	74.00	-18.58	44.12	7.97	35.09	38.42	Peak	VERTICAL	100	95
4 a	15900.42	42.59	54.00	-11.41	31.29	7.97	35.09	38.42	Average	VERTICAL	100	95

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 64 / Ant. 1
Test Date	Jun. 19, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna			A/Pos	T/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	Pol/Phase	cm	deg
1	10639.03	54.36	74.00	-19.64	44.38	6.59	35.08	38.47	Peak	HORIZONTAL	100	240
2	10640.21	39.74	54.00	-14.26	29.76	6.59	35.08	38.47	Average	HORIZONTAL	100	240
3 a	15957.50	42.03	54.00	-11.97	30.78	8.00	35.16	38.41	Average	HORIZONTAL	100	169
4 p	15959.08	55.78	74.00	-18.22	44.53	8.00	35.16	38.41	Peak	HORIZONTAL	100	169

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna			A/Pos	T/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	Pol/Phase	cm	deg
1	10639.94	40.97	54.00	-13.03	30.99	6.59	35.08	38.47	Average	VERTICAL	102	68
2	10640.17	53.20	74.00	-20.80	43.22	6.59	35.08	38.47	Peak	VERTICAL	102	68
3 a	15957.50	42.25	54.00	-11.75	31.00	8.00	35.16	38.41	Average	VERTICAL	100	95
4 p	15962.48	55.72	74.00	-18.28	44.47	8.00	35.16	38.41	Peak	VERTICAL	100	174

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 100 / Ant. 1
Test Date	Jun. 19, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna			A/Pos	T/Pos
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	Pol/Phase	cm	deg
1 a	10999.88	40.84	54.00	-13.16	30.79	6.46	34.81	38.40	Average	HORIZONTAL	100	199
2 p	11002.43	56.44	74.00	-17.56	46.39	6.46	34.81	38.40	Peak	HORIZONTAL	100	199

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna			A/Pos	T/Pos
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	Pol/Phase	cm	deg
1 p	10999.02	57.23	74.00	-16.77	47.18	6.46	34.81	38.40	Peak	VERTICAL	147	304
2 a	10999.88	41.78	54.00	-12.22	31.73	6.46	34.81	38.40	Average	VERTICAL	147	304

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 116 / Ant. 1
Test Date	Jun. 19, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	A/Pos	T/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			cm	deg
1 p	11159.11	52.81	74.00	-21.19	42.63	6.56	34.81	38.43	Peak	HORIZONTAL	100	245
2 a	11159.82	41.78	54.00	-12.22	31.60	6.56	34.81	38.43	Average	HORIZONTAL	100	245

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	A/Pos	T/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			cm	deg
1 p	11159.12	58.87	74.00	-15.13	48.69	6.56	34.81	38.43	Peak	VERTICAL	100	144
2 a	11159.96	44.90	54.00	-9.10	34.72	6.56	34.81	38.43	Average	VERTICAL	100	144

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 140 / Ant. 1
Test Date	Jun. 19, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		Pol/Phase	A/Pos	T/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark		cm	deg
1 p	11398.90	51.01	74.00	-22.99	40.66	6.69	34.82	38.48	Peak	HORIZONTAL	100	88
2 a	11399.00	41.14	54.00	-12.86	30.79	6.69	34.82	38.48	Average	HORIZONTAL	100	88

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		Pol/Phase	A/Pos	T/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark		cm	deg
1 p	11398.98	52.27	74.00	-21.73	41.92	6.69	34.82	38.48	Peak	VERTICAL	100	46
2 a	11399.31	40.82	54.00	-13.18	30.47	6.69	34.82	38.48	Average	VERTICAL	100	46

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 38 / Ant. 1
Test Date	Apr. 18, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15571.92	37.01	54.00	-16.99	28.60	6.13	37.61	35.33	Average	100	151 HORIZONTAL
2	15572.63	50.91	74.00	-23.09	42.50	6.13	37.61	35.33	Peak	100	151 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15563.24	50.63	74.00	-23.37	42.16	6.13	37.65	35.31	Peak	100	246 VERTICAL
2	15566.67	37.09	54.00	-16.91	28.64	6.13	37.65	35.33	Average	100	246 VERTICAL

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 46 / Ant. 1
Test Date	Apr. 18, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15688.65	51.74	74.00	-22.26	43.46	6.14	37.51	35.37	Peak	100	240	HORIZONTAL
2	15697.15	37.23	54.00	-16.77	28.98	6.14	37.49	35.38	Average	100	240	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15686.57	51.55	74.00	-22.45	43.27	6.14	37.51	35.37	Peak	100	318	VERTICAL
2	15695.80	37.23	54.00	-16.77	28.98	6.14	37.49	35.38	Average	100	318	VERTICAL

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 54 / Ant. 1
Test Date	Jun. 19, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	A/Pos	T/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			cm	deg
1 p	15809.69	53.35	74.00	-20.65	41.99	7.95	35.03	38.44	Peak	HORIZONTAL	100	224
2 a	15809.96	39.24	54.00	-14.76	27.88	7.95	35.03	38.44	Average	HORIZONTAL	100	224

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	A/Pos	T/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			cm	deg
1 p	15809.55	53.46	74.00	-20.54	42.10	7.95	35.03	38.44	Peak	VERTICAL	100	329
2 a	15809.90	39.14	54.00	-14.86	27.78	7.95	35.03	38.44	Average	VERTICAL	100	329

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 62 / Ant. 1
Test Date	Jun. 19, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		Pol/Phase	A/Pos	T/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark		cm	deg
1 p	10619.81	54.21	74.00	-19.79	44.23	6.60	35.10	38.48	Peak	HORIZONTAL	100	231
2 a	10619.99	41.22	54.00	-12.78	31.24	6.60	35.10	38.48	Average	HORIZONTAL	100	231
3	15930.07	40.43	54.00	-13.57	29.15	7.99	35.12	38.41	Average	HORIZONTAL	100	221
4	15930.20	53.92	74.00	-20.08	42.64	7.99	35.12	38.41	Peak	HORIZONTAL	100	221

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		Pol/Phase	A/Pos	T/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark		cm	deg
1 a	10620.05	41.94	54.00	-12.06	31.96	6.60	35.10	38.48	Average	VERTICAL	100	278
2 p	10620.12	55.23	74.00	-18.77	45.25	6.60	35.10	38.48	Peak	VERTICAL	100	278
3	15929.81	53.56	74.00	-20.44	42.28	7.99	35.12	38.41	Peak	VERTICAL	100	33
4	15930.30	40.70	54.00	-13.30	29.44	7.99	35.14	38.41	Average	VERTICAL	100	33

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 102 / Ant. 1
Test Date	Jun. 19, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	A/Pos	T/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			cm	deg
1 p	11019.70	52.60	74.00	-21.40	42.54	6.47	34.81	38.40	Peak	HORIZONTAL	100	108
2 a	11020.00	41.23	54.00	-12.77	31.17	6.47	34.81	38.40	Average	HORIZONTAL	100	108

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	A/Pos	T/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			cm	deg
1 a	11019.86	43.79	54.00	-10.21	33.73	6.47	34.81	38.40	Average	VERTICAL	125	261
2 p	11020.48	57.11	74.00	-16.89	47.05	6.47	34.81	38.40	Peak	VERTICAL	125	261

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 110 / Ant. 1
Test Date	Jun. 19, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna			A/Pos	T/Pos
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	Pol/Phase	cm	deg
1 a	11099.88	42.32	54.00	-11.68	32.19	6.52	34.81	38.42	Average	HORIZONTAL	100	238
2 p	11100.15	54.93	74.00	-19.07	44.80	6.52	34.81	38.42	Peak	HORIZONTAL	100	238

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna			A/Pos	T/Pos
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	Pol/Phase	cm	deg
1 a	11099.99	44.72	54.00	-9.28	34.59	6.52	34.81	38.42	Average	VERTICAL	100	144
2 p	11100.46	57.43	74.00	-16.57	47.30	6.52	34.81	38.42	Peak	VERTICAL	100	144

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 134 / Ant. 1
Test Date	Jun. 19, 2012		

Horizontal

		Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	A/Pos	T/Pos
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			cm	deg
1	a	11339.83	41.49	54.00	-12.51	31.19	6.65	34.82	38.47	Average	HORIZONTAL	100	284
2	p	11340.14	53.93	74.00	-20.07	43.63	6.65	34.82	38.47	Peak	HORIZONTAL	100	284

Vertical

		Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	A/Pos	T/Pos
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			cm	deg
1	a	11340.00	42.99	54.00	-11.01	32.69	6.65	34.82	38.47	Average	VERTICAL	100	120
2	p	11340.47	55.43	74.00	-18.57	45.13	6.65	34.82	38.47	Peak	VERTICAL	100	120

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 36 / Ant. 1
Test Date	Apr. 18, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15536.51	37.02	54.00	-16.98	28.51	6.13	37.67	35.29	Average	100	188	HORIZONTAL
2	15538.01	50.83	74.00	-23.17	42.36	6.13	37.65	35.31	Peak	100	188	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15532.98	50.80	74.00	-23.20	42.23	6.13	37.73	35.29	Peak	100	50	VERTICAL
2	15535.96	37.14	54.00	-16.86	28.57	6.13	37.73	35.29	Average	100	50	VERTICAL

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 40 / Ant. 1
Test Date	Apr. 18, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15591.09	50.99	74.00	-23.01	42.60	6.13	37.60	35.34 Peak	100	264	HORIZONTAL
2	15594.17	36.86	54.00	-17.14	28.47	6.13	37.60	35.34 Average	100	264	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15593.27	51.59	74.00	-22.41	43.20	6.13	37.60	35.34 Peak	100	170	VERTICAL
2	15598.14	36.85	54.00	-17.15	28.46	6.13	37.60	35.34 Average	100	170	VERTICAL

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 48 / Ant. 1
Test Date	Apr. 18, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15712.63	37.06	54.00	-16.94	28.82	6.14	37.48	35.38	Average	100	109	HORIZONTAL
2	15717.24	50.38	74.00	-23.62	42.15	6.14	37.48	35.39	Peak	100	109	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15716.76	51.74	74.00	-22.26	43.51	6.14	37.48	35.39	Peak	100	12	VERTICAL
2	15722.66	37.05	54.00	-16.95	28.82	6.14	37.48	35.39	Average	100	12	VERTICAL

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 52 / Ant. 1
Test Date	Jun. 19, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna			A/Pos	T/Pos
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	Pol/Phase	cm	deg
1 p	15781.00	50.40	74.00	-23.60	39.04	7.93	35.01	38.44	Peak	HORIZONTAL	100	153
2 a	15783.54	41.20	54.00	-12.80	29.83	7.94	35.01	38.44	Average	HORIZONTAL	100	153

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna			A/Pos	T/Pos
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	Pol/Phase	cm	deg
1 p	15776.08	56.38	74.00	-17.62	45.00	7.93	34.99	38.44	Peak	VERTICAL	100	360
2 a	15783.84	41.21	54.00	-12.79	29.84	7.94	35.01	38.44	Average	VERTICAL	100	360

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 60 / Ant. 1
Test Date	Jun. 19, 2012		

Horizontal

		Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna			A/Pos	T/Pos
		MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	Pol/Phase	cm	deg
1	a	10600.08	41.67	54.00	-12.33	31.71	6.60	35.12	38.48	Average	HORIZONTAL	128	298
2		10600.44	51.61	74.00	-22.39	41.65	6.60	35.12	38.48	Peak	HORIZONTAL	128	298
3	p	15900.31	53.40	74.00	-20.60	42.10	7.97	35.09	38.42	Peak	HORIZONTAL	127	100
4		15901.72	41.45	54.00	-12.55	30.14	7.98	35.09	38.42	Average	HORIZONTAL	127	100

Vertical

		Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna			A/Pos	T/Pos
		MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	Pol/Phase	cm	deg
1		10599.95	40.49	68.30	-27.81	30.53	6.60	35.12	38.48	Average	VERTICAL	100	272
2		10602.31	55.56	74.00	-18.44	45.58	6.60	35.10	38.48	Peak	VERTICAL	100	272
3	a	15900.74	42.23	54.00	-11.77	30.92	7.98	35.09	38.42	Average	VERTICAL	100	40
4	p	15901.77	55.69	74.00	-18.31	44.38	7.98	35.09	38.42	Peak	VERTICAL	100	40

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 64 / Ant. 1
Test Date	Jun. 19, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	Pol/Phase	A/Pos	T/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			cm	deg
1	10640.01	40.49	54.00	-13.51	30.51	6.59	35.08	38.47	Average	HORIZONTAL	132	293
2 p	10641.74	53.04	74.00	-20.96	43.06	6.59	35.08	38.47	Peak	HORIZONTAL	132	293
3 a	15960.26	41.37	54.00	-12.63	30.12	8.00	35.16	38.41	Average	HORIZONTAL	100	40
4	15960.87	52.42	74.00	-21.58	41.17	8.00	35.16	38.41	Peak	HORIZONTAL	100	40

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	Pol/Phase	A/Pos	T/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			cm	deg
1 a	10640.07	41.81	54.00	-12.19	31.83	6.59	35.08	38.47	Average	VERTICAL	100	279
2 p	10642.26	53.91	74.00	-20.09	43.93	6.59	35.08	38.47	Peak	VERTICAL	100	279
3	15961.93	41.41	54.00	-12.59	30.16	8.00	35.16	38.41	Average	VERTICAL	100	190
4	15961.99	50.83	74.00	-23.17	39.58	8.00	35.16	38.41	Peak	VERTICAL	100	190

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 100 / Ant. 1
Test Date	Jun. 19, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna			A/Pos	T/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	Pol/Phase	cm	deg
1 a	10999.97	44.55	54.00	-9.45	34.50	6.46	34.81	38.40	Average	HORIZONTAL	127	292
2 p	11000.63	54.46	74.00	-19.54	44.41	6.46	34.81	38.40	Peak	HORIZONTAL	127	292

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna			A/Pos	T/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	Pol/Phase	cm	deg
1 a	10999.95	44.30	54.00	-9.70	34.25	6.46	34.81	38.40	Average	VERTICAL	157	302
2 p	11000.51	51.94	74.00	-22.06	41.89	6.46	34.81	38.40	Peak	VERTICAL	157	302

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 116 / Ant. 1
Test Date	Jun. 19, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna			A/Pos	T/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	Pol/Phase	cm	deg
1 a	11157.53	42.90	54.00	-11.10	32.72	6.56	34.81	38.43	Average	HORIZONTAL	120	216
2 p	11157.65	55.27	74.00	-18.73	45.09	6.56	34.81	38.43	Peak	HORIZONTAL	120	216

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna			A/Pos	T/Pos
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	Pol/Phase	cm	deg
1 a	11160.03	44.12	54.00	-9.88	33.94	6.56	34.81	38.43	Average	VERTICAL	100	119
2 p	11161.48	56.52	74.00	-17.48	46.34	6.56	34.81	38.43	Peak	VERTICAL	100	119

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 140 / Ant. 1
Test Date	Jun. 19, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna			A/Pos	T/Pos
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	Pol/Phase	cm	deg
1 a	11399.94	42.53	54.00	-11.47	32.18	6.69	34.82	38.48	Average	HORIZONTAL	100	88
2 p	11401.64	56.10	74.00	-17.90	45.75	6.69	34.82	38.48	Peak	HORIZONTAL	100	88

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna			A/Pos	T/Pos
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	Pol/Phase	cm	deg
1 a	11400.13	41.41	54.00	-12.59	31.06	6.69	34.82	38.48	Average	VERTICAL	100	248
2 p	11402.21	53.62	74.00	-20.38	43.27	6.69	34.82	38.48	Peak	VERTICAL	100	248

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for Peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 36, 40, 48 /Ant. 1
Test Date	Apr. 18, 2012		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5149.68	59.18	74.00	-14.82	22.08	3.43	33.67	0.00	Peak	100	162	HORIZONTAL
2	5150.00	43.78	54.00	-10.22	6.68	3.43	33.67	0.00	Average	100	162	HORIZONTAL
3	5171.83	105.35				3.44	33.70	0.00	Peak	100	162	HORIZONTAL
4	5171.99	95.77				3.44	33.70	0.00	Average	100	162	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5146.15	51.77	74.00	-22.23	14.67	3.43	33.67	0.00	Peak	100	167	HORIZONTAL
2	5150.00	39.55	54.00	-14.45	2.45	3.43	33.67	0.00	Average	100	167	HORIZONTAL
3	5207.05	104.96				3.45	33.76	0.00	Peak	100	167	HORIZONTAL
4	5208.01	95.37				3.45	33.76	0.00	Average	100	167	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5149.52	50.78	74.00	-23.22	13.68	3.43	33.67	0.00	Peak	100	180	VERTICAL
2	5150.00	38.90	54.00	-15.10	1.80	3.43	33.67	0.00	Average	100	180	VERTICAL
3	5231.83	93.07				3.46	33.82	0.00	Average	100	180	VERTICAL
4	5232.79	102.72				3.46	33.82	0.00	Peak	100	180	VERTICAL
5	5350.00	38.55	54.00	-15.45	1.03	3.49	34.03	0.00	Average	100	180	VERTICAL
6	5352.89	49.88	74.00	-24.12	12.36	3.49	34.03	0.00	Peak	100	180	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch52, 60 ,64 / Ant. 1
Test Date	Jun. 19, 2012		

Channel 52

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5252.80	104.53				6.56	34.22	0.00 Peak	113	170	HORIZONTAL
2	5254.40	95.01				6.56	34.22	0.00 Average	113	170	HORIZONTAL
3	5350.00	44.04	54.00	-9.96	3.00	6.62	34.42	0.00 Average	113	170	HORIZONTAL
4	5350.40	55.41	74.00	-18.59	14.37	6.62	34.42	0.00 Peak	113	170	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5260 MHz.

Channel 60

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5302.00	95.43				6.59	34.32	0.00 Average	113	169	HORIZONTAL
2	5302.00	104.99				6.59	34.32	0.00 Peak	113	169	HORIZONTAL
3	5350.00	44.00	54.00	-10.00	2.96	6.62	34.42	0.00 Average	113	169	HORIZONTAL
4	5350.00	56.10	74.00	-17.90	15.06	6.62	34.42	0.00 Peak	113	169	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5313.20	94.78				6.60	34.32	0.00 Average	112	170	HORIZONTAL
2	5313.20	104.46				6.60	34.32	0.00 Peak	112	170	HORIZONTAL
3	5350.00	44.28	54.00	-9.72	3.24	6.62	34.42	0.00 Average	112	170	HORIZONTAL
4	5350.00	57.89	74.00	-16.11	16.85	6.62	34.42	0.00 Peak	112	170	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch100, 140 / Ant. 1
Test Date	Jun. 19, 2012		

Channel 100

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark		
			dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg
1	5460.00	44.22	54.00	-9.78	2.91	6.68	34.63	0.00	Average	107	178 HORIZONTAL
2	5460.00	57.71	74.00	-16.29	16.40	6.68	34.63	0.00	Peak	107	178 HORIZONTAL
3	5468.80	64.88	68.30	-3.42	23.52	6.69	34.67	0.00	Peak	107	178 HORIZONTAL
4	5496.80	99.42				6.71	34.70	0.00	Average	107	178 HORIZONTAL
5	5499.00	108.96				6.71	34.70	0.00	Peak	107	178 HORIZONTAL

Item 4, 5 are the fundamental frequency at 5500 MHz.

Channel 140

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark		
			dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg
1	5696.80	98.23				6.73	34.86	0.00	Average	102	169 HORIZONTAL
2	5697.80	108.01				6.73	34.86	0.00	Peak	102	169 HORIZONTAL
3	5725.00	64.42	68.30	-3.88	22.79	6.74	34.89	0.00	Peak	102	169 HORIZONTAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 38, 46 / Ant. 1
Test Date	Apr. 18, 2012		

Channel 38

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5149.68	68.23	74.00	-5.77	31.13	3.43	33.67	0.00 Peak	110	170	HORIZONTAL
2	5150.00	53.91	54.00	-0.09	16.81	3.43	33.67	0.00 Average	110	170	HORIZONTAL
3	5173.33	102.62				3.44	33.70	0.00 Peak	110	170	HORIZONTAL
4	5174.30	93.07				3.44	33.70	0.00 Average	110	170	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5149.36	50.58	74.00	-23.42	13.48	3.43	33.67	0.00 Peak	100	40	VERTICAL
2	5150.00	39.30	54.00	-14.70	2.20	3.43	33.67	0.00 Average	100	40	VERTICAL
3	5213.65	101.08				3.45	33.79	0.00 Peak	100	40	VERTICAL
4	5214.30	91.62				3.45	33.79	0.00 Average	100	40	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch54, 62 / Ant. 1
Test Date	Jun. 19, 2012		

Channel 54

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5273.60	101.91				6.57	34.25	0.00	Peak	113	164 HORIZONTAL
2	5274.40	92.70				6.57	34.25	0.00	Average	113	164 HORIZONTAL
3	5350.00	44.01	54.00	-9.99	2.97	6.62	34.42	0.00	Average	113	164 HORIZONTAL
4	5352.00	55.34	74.00	-18.66	14.30	6.62	34.42	0.00	Peak	113	164 HORIZONTAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

Channel 62

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5312.80	102.69				6.60	34.32	0.00	Peak	112	165 HORIZONTAL
2	5313.60	93.27				6.60	34.32	0.00	Average	112	165 HORIZONTAL
3	5350.00	49.74	54.00	-4.26	8.70	6.62	34.42	0.00	Average	112	165 HORIZONTAL
4	5350.40	63.62	74.00	-10.38	22.58	6.62	34.42	0.00	Peak	112	165 HORIZONTAL

Item 1, 2 are the fundamental frequency at 5310 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch102, 110, ,134 / Ant. 1
Test Date	Jun. 19, 2012		

Channel 102

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5460.00	46.66	54.00	-7.34	5.35	6.68	34.63	0.00	Average	108	166 HORIZONTAL
2	5460.00	62.75	74.00	-11.25	21.44	6.68	34.63	0.00	Peak	108	166 HORIZONTAL
3	5470.00	67.95	68.30	-0.35	26.59	6.69	34.67	0.00	Peak	108	166 HORIZONTAL
4	5498.00	93.92				6.71	34.70	0.00	Average	108	166 HORIZONTAL
5	5498.80	103.64				6.71	34.70	0.00	Peak	108	166 HORIZONTAL

Item 4, 5 are the fundamental frequency at 5510 MHz.

Channel 110

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5458.80	56.86	74.00	-17.14	15.55	6.68	34.63	0.00	Peak	107	174 HORIZONTAL
2	5460.00	44.06	54.00	-9.94	2.75	6.68	34.63	0.00	Average	107	174 HORIZONTAL
3	5470.00	55.64	68.30	-12.66	14.28	6.69	34.67	0.00	Peak	107	174 HORIZONTAL
4	5555.60	97.83				6.72	34.75	0.00	Average	107	174 HORIZONTAL
5	5556.80	107.74				6.72	34.75	0.00	Peak	107	174 HORIZONTAL

Item 4, 5 are the fundamental frequency at 5550 MHz.

Channel 134

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5665.60	96.26				6.73	34.83	0.00	Average	104	173 HORIZONTAL
2	5666.00	106.28				6.73	34.83	0.00	Peak	104	173 HORIZONTAL
3	5725.00	59.00	68.30	-9.30	17.37	6.74	34.89	0.00	Peak	104	173 HORIZONTAL

Item 1, 2 are the fundamental frequency at 5670 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 36, 40,48 / Ant. 1
Test Date	Apr. 18, 2012		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5149.04	58.36	74.00	-15.64	21.26	3.43	33.67	0.00	Peak	100	174	HORIZONTAL
2	5150.00	42.65	54.00	-11.35	5.55	3.43	33.67	0.00	Average	100	174	HORIZONTAL
3	5173.27	95.55				3.44	33.70	0.00	Average	100	174	HORIZONTAL
4	5173.27	105.14				3.44	33.70	0.00	Peak	100	174	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5149.04	50.44	74.00	-23.56	13.34	3.43	33.67	0.00	Peak	100	176	HORIZONTAL
2	5150.00	38.95	54.00	-15.05	1.85	3.43	33.67	0.00	Average	100	176	HORIZONTAL
3	5198.72	95.63				3.45	33.76	0.00	Average	100	176	HORIZONTAL
4	5199.36	105.04				3.45	33.76	0.00	Peak	100	176	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5148.08	51.04	74.00	-22.96	13.94	3.43	33.67	0.00	Peak	100	186	VERTICAL
2	5150.00	38.77	54.00	-15.23	1.67	3.43	33.67	0.00	Average	100	186	VERTICAL
3	5232.79	94.06				3.46	33.82	0.00	Average	100	186	VERTICAL
4	5233.27	103.39				3.46	33.82	0.00	Peak	100	186	VERTICAL
5	5350.00	38.54	54.00	-15.46	1.02	3.49	34.03	0.00	Average	100	186	VERTICAL
6	5352.40	49.60	74.00	-24.40	12.08	3.49	34.03	0.00	Peak	100	186	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 52, 60, 64 / Ant. 1
Test Date	Jun. 19, 2012		

Channel 52

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	5252.80	104.62				6.56	34.22	0.00	Peak	113	167	HORIZONTAL
2	5254.80	95.31				6.56	34.22	0.00	Average	113	167	HORIZONTAL
3	5350.00	44.02	54.00	-9.98	2.98	6.62	34.42	0.00	Average	113	167	HORIZONTAL
4	5352.40	56.03	74.00	-17.97	14.99	6.62	34.42	0.00	Peak	113	167	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5260 MHz.

Channel 60

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	5301.60	96.71				6.59	34.32	0.00	Average	112	170	HORIZONTAL
2	5302.80	105.69				6.59	34.32	0.00	Peak	112	170	HORIZONTAL
3	5350.00	44.01	54.00	-9.99	2.97	6.62	34.42	0.00	Average	112	170	HORIZONTAL
4	5350.40	56.70	74.00	-17.30	15.66	6.62	34.42	0.00	Peak	112	170	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	5313.20	95.82				6.60	34.32	0.00	Average	112	168	HORIZONTAL
2	5313.20	104.97				6.60	34.32	0.00	Peak	112	168	HORIZONTAL
3	5350.00	44.32	54.00	-9.68	3.28	6.62	34.42	0.00	Average	112	168	HORIZONTAL
4	5350.40	61.02	74.00	-12.98	19.98	6.62	34.42	0.00	Peak	112	168	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	23°C	Humidity	59%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 100, 140 / Ant. 1
Test Date	Jun. 19, 2012		

Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5459.40	57.89	74.00	-16.11	16.58	6.68	34.63	0.00	Peak	109	172	HORIZONTAL
2	5460.00	44.22	54.00	-9.78	2.91	6.68	34.63	0.00	Average	109	172	HORIZONTAL
3	5469.80	62.47	68.30	-5.83	21.11	6.69	34.67	0.00	Peak	109	172	HORIZONTAL
4	5497.60	108.89				6.71	34.70	0.00	Peak	109	172	HORIZONTAL
5	5498.40	99.60				6.71	34.70	0.00	Average	109	172	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5500 MHz.

Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5696.80	108.21				6.73	34.86	0.00	Peak	102	167	HORIZONTAL
2	5697.40	98.82				6.73	34.86	0.00	Average	102	167	HORIZONTAL
3	5726.00	60.89	68.30	-7.41	19.26	6.74	34.89	0.00	Peak	102	167	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.8. Frequency Stability Measurement

4.8.1. Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user's manual or $\pm 20\text{ppm}$ (IEEE 802.11nspecification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6 \text{ ppm}$ and the limit is less than $\pm 20\text{ppm}$ (IEEE 802.11nspecification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is $-30^\circ\text{C} \sim 50^\circ\text{C}$.

4.8.4. Test Setup Layout

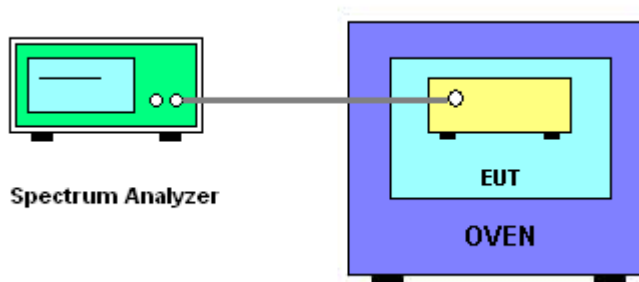

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)	
(V)	5200	5300
126.50	5199.9668	5299.9940
110.00	5199.9724	5299.9520
93.50	5199.9755	5299.9640
Max. Deviation (MHz)	0.033200	0.048000
Max. Deviation (ppm)	6.38	9.06

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)	
(°C)	5200	5300
-30	5199.9777	5299.9720
-20	5199.9775	5299.9642
-10	5199.9756	5299.9528
0	5199.9755	5299.9628
10	5199.9731	5299.9580
20	5199.9724	5299.9628
30	5199.9720	5299.9648
40	5199.9718	5299.9648
50	5199.9711	5299.9720
Max. Deviation (MHz)	0.028900	0.047200
Max. Deviation (ppm)	5.56	8.9057

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Sep. 14, 2011	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 14, 2011	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9K ~ 30MHz	Nov. 30, 2011	Conduction (CO01-CB)
PULSE LIMITER	R&S	ESH3-Z2	100430	9K~30MHz	Feb. 03, 2012	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 4, 2011	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Jan. 11, 2012	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 25, 2011	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 22, 2011	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 29, 2011	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz~40GHz	Nov. 03, 2011	Radiation (05CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 20, 2012	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Sep. 09, 2010*	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N/A	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N/A	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Sep. 26, 2011	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	May 20, 2011	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	May 20, 2012	Conducted (TH01-CB)
Thermo-Hygro Meter	N/A	HC 520	#1	15~70 degree	Nov. 02, 2011	Conducted (TH01-CB)
Signal Generator	R&S	SMR40	100302	10MHz-40GHz	Nov. 22, 2011	Conducted (TH01-CB)
RF Power Divider	HP	11636A	00306	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	44100	1839	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Power Splitter	Anaren	42100	17930	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
Signal generator	R&S	SMU200A	102782	10MHz-40GHz	Jun. 07, 2011	Conducted (TH01-CB)
Horn Antenna	COM-POWER	AH-118	071187	1GHz – 18GHz	Mar. 18, 2012	Conducted (TH01-CB)
Horn Antenna	COM-POWER	AH-118	071042	1GHz – 18GHz	Nov. 01, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-12	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-13	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 01, 2011	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 01, 2011	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-110702

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Road, Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2010 to January 09, 2013
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : July 02, 2011

P1, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix