

FCC Test Report (2.4GHz WLAN)

Report No.: RFBDKG-WTW-P21060167

FCC ID: JNZVR0028

Test Model: VR0028

Received Date: June 21, 2021

Test Date: June 25 to July 03, 2021

Issued Date: Aug. 10, 2021

Applicant: Logitech Far East Ltd

Address: 7700 Gateway Boulevard Newark California United States

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
3 General Information	7
3.1 General Description of EUT (2.4GHz WLAN).....	7
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Duty Cycle of Test Signal.....	11
3.4 Description of Support Units.....	12
3.4.1 Configuration of System under Test.....	13
3.5 General Description of Applied Standards and References.....	15
4 Test Types and Results	16
4.1 Radiated Emission and Bandedge Measurement.....	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	16
4.1.2 Test Instruments.....	17
4.1.3 Test Procedures.....	19
4.1.4 Deviation from Test Standard.....	20
4.1.5 Test Setup.....	20
4.1.6 EUT Operating Conditions.....	21
4.1.7 Test Results.....	22
4.2 Conducted Emission Measurement.....	33
4.2.1 Limits of Conducted Emission Measurement.....	33
4.2.2 Test Instruments.....	33
4.2.3 Test Procedures.....	34
4.2.4 Deviation from Test Standard.....	34
4.2.5 Test Setup.....	34
4.2.6 EUT Operating Conditions.....	34
4.2.7 Test Results.....	35
4.3 6dB Bandwidth Measurement.....	37
4.3.1 Limits of 6dB Bandwidth Measurement.....	37
4.3.2 Test Setup.....	37
4.3.3 Test Instruments.....	37
4.3.4 Test Procedure.....	37
4.3.5 Deviation from Test Standard.....	37
4.3.6 EUT Operating Conditions.....	37
4.3.7 Test Result.....	38
4.4 Conducted Output Power Measurement.....	40
4.4.1 Limits of Conducted Output Power Measurement.....	40
4.4.2 Test Setup.....	40
4.4.3 Test Instruments.....	40
4.4.4 Test Procedures.....	40
4.4.5 Deviation from Test Standard.....	40
4.4.6 EUT Operating Conditions.....	40
4.4.7 Test Results.....	41
4.5 Power Spectral Density Measurement.....	43
4.5.1 Limits of Power Spectral Density Measurement.....	43
4.5.2 Test Setup.....	43
4.5.3 Test Instruments.....	43
4.5.4 Test Procedure.....	43
4.5.5 Deviation from Test Standard.....	43
4.5.6 EUT Operating Condition.....	43

4.5.7 Test Results	44
4.6 Conducted Out of Band Emission Measurement.....	46
4.6.1 Limits of Conducted Out of Band Emission Measurement	46
4.6.2 Test Setup.....	46
4.6.3 Test Instruments	46
4.6.4 Test Procedure	46
4.6.5 Deviation from Test Standard	46
4.6.6 EUT Operating Condition	46
4.6.7 Test Results	46
5 Pictures of Test Arrangements.....	50
Annex A - Band-Edge Measurement.....	51
Appendix – Information of the Testing Laboratories	54

Release Control Record

Issue No.	Description	Date Issued
RFBDKG-WTW-P21060167	Original release.	Aug. 10, 2021

1 Certificate of Conformity

Product: TAP Scheduler

Brand: Logitech

Test Model: VR0028

Sample Status: Engineering sample

Applicant: Logitech Far East Ltd

Test Date: June 25 to July 03, 2021

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Phoenix Huang , **Date:** Aug. 10, 2021
Phoenix Huang / Specialist

Approved by : Clark Lin , **Date:** Aug. 10, 2021
Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -5.39 dB at 14.83594 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -4.0 dB at 2483.50 MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note:

- For 2.4 GHz band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Conducted emissions	-	2.5 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.4 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.3 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (2.4GHz WLAN)

Product	TAP Scheduler
Brand	Logitech
Test Model	VR0028
Status of EUT	Engineering sample
Power Supply Rating	56 Vdc from POE
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11 Mbps 802.11g: up to 54 Mbps 802.11n: up to 72.2 Mbps
Operating Frequency	2.412 ~ 2.462 GHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20): 11
Output Power	300.608 mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Cable Supplied	NA

Note:

1. There are WLAN and Bluetooth technology used for the EUT.
2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4GHz)	WLAN (5GHz)
2	WLAN (2.4GHz)	Bluetooth
3	WLAN (5GHz)	Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The antenna provided to the EUT, please refer to the following table:

Brand	Model	Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connector Type
FIH	S0A260020A0	3	2.4~2.4835	Monopole	None
		4.06	5.15~5.25		
		3.99	5.25~5.35		
		2.95	5.47~5.725		
		1.9	5.725~5.85		

4. The EUT incorporates a SISO function:

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	1TX	1RX
802.11g	1TX	1RX
802.11n (HT20)	1TX	1RX

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.
6. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
-	√	√	√	√	-

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE $<$ 1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Test Condition:

Applicable To	Environmental Conditions	Input Power (System)	Tested By
RE \geq 1G	25deg. C, 65%RH	120Vac, 60Hz	Nelson Teng
RE $<$ 1G	25deg. C, 70%RH	120Vac, 60Hz	Ryan Du
PLC	25deg. C, 75%RH	120Vac, 60Hz	Ryan Du
APCM	25deg. C, 60%RH	120Vac, 60Hz	Kevin Ko


3.3 Duty Cycle of Test Signal

Duty cycle of test signal is $\geq 98\%$, duty factor is not required.

802.11b: Duty cycle = $8.383 \text{ ms} / 8.425 \text{ ms} = 0.995$

802.11g: Duty cycle = $2.689 \text{ ms} / 2.735 \text{ ms} = 0.983$

802.11n (HT20): Duty cycle = $2.508 \text{ ms} / 2.555 \text{ ms} = 0.982$

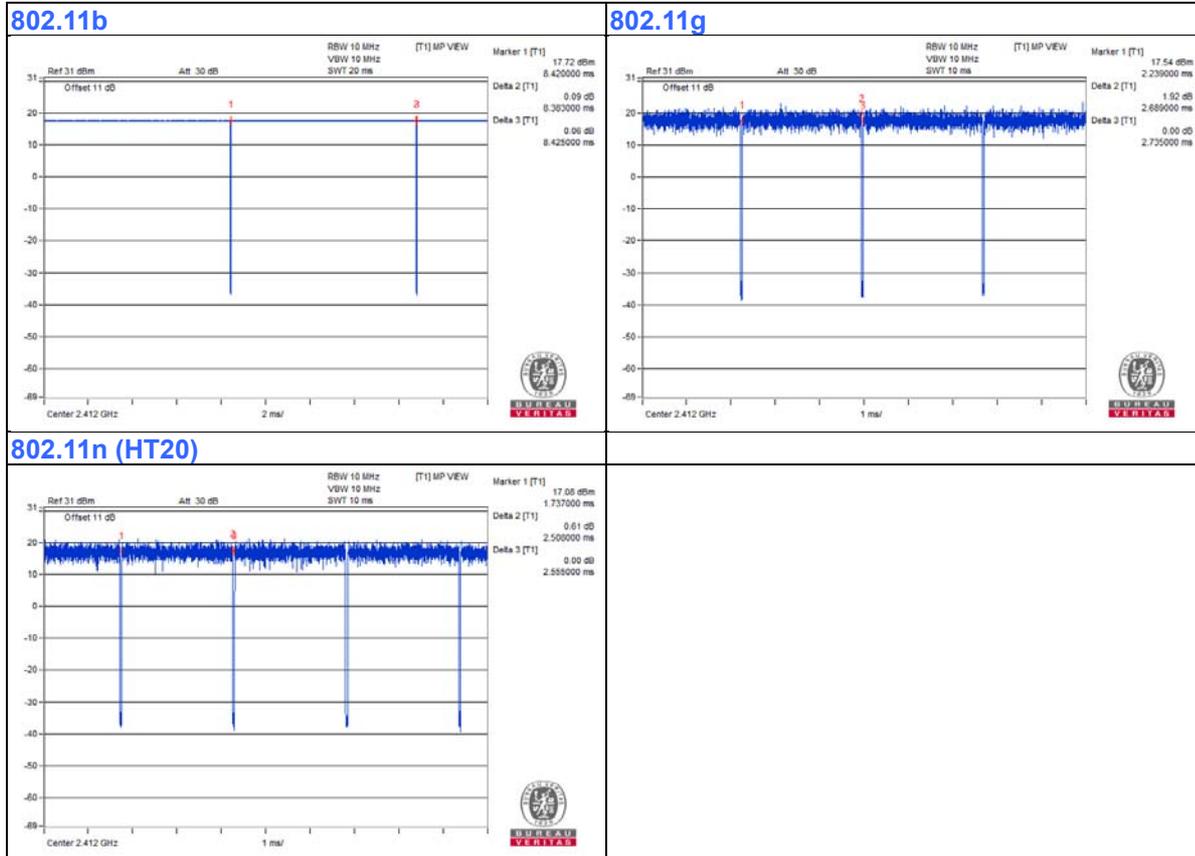

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	PoE	BulletPoE	BPI100-H	NA	NA	Supplied by client
B.	Laptop	Lenovo	20U5S01X00 L14	PF-1ANPYA	NA	Provided by Lab


Note:

1. All power cords of the above support units are non-shielded (1.8m).


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	AC Cable	1	1.8	No	0	Provided by Lab
3.	RJ-45 Cable	1	1.5	No	0	Supplied by client

3.4.1 Configuration of System under Test

For AC Power Conducted Emission test:

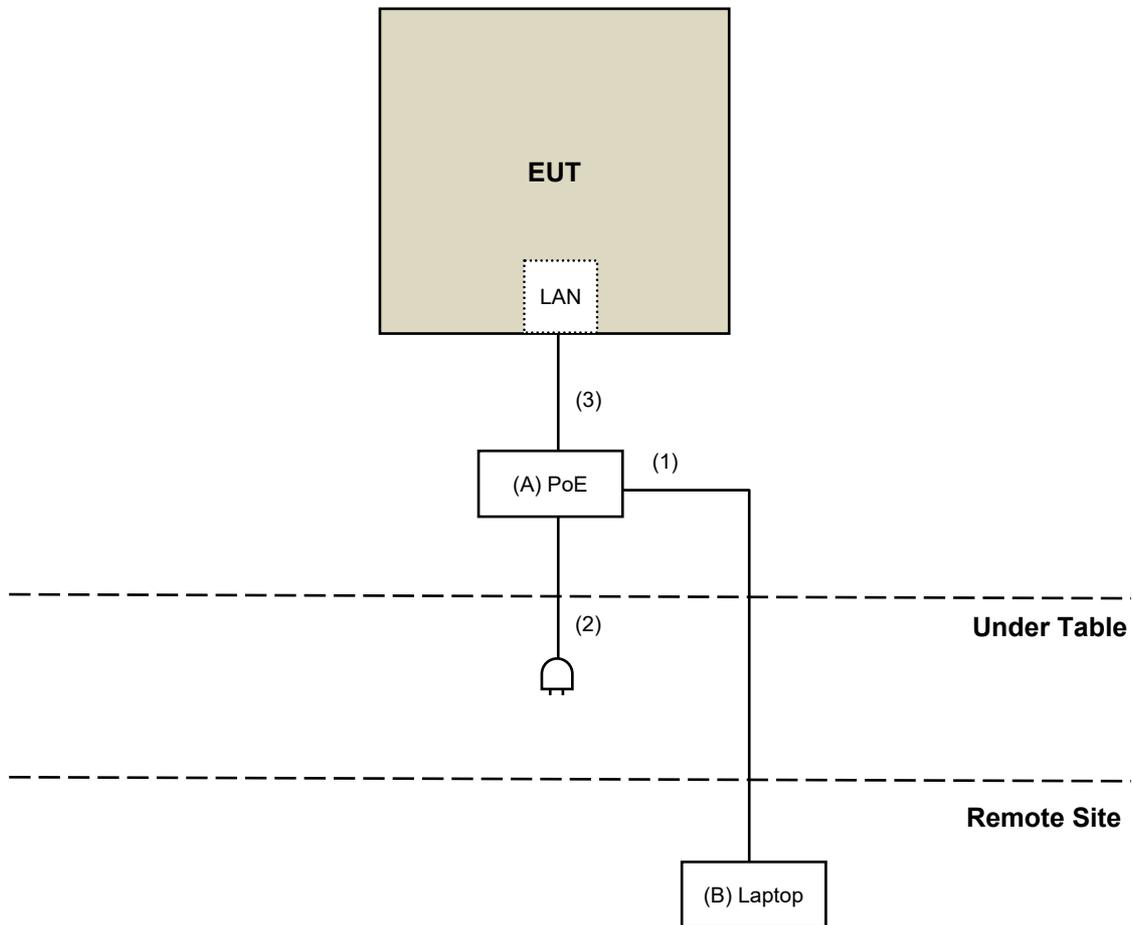

For Radiated Emission test:

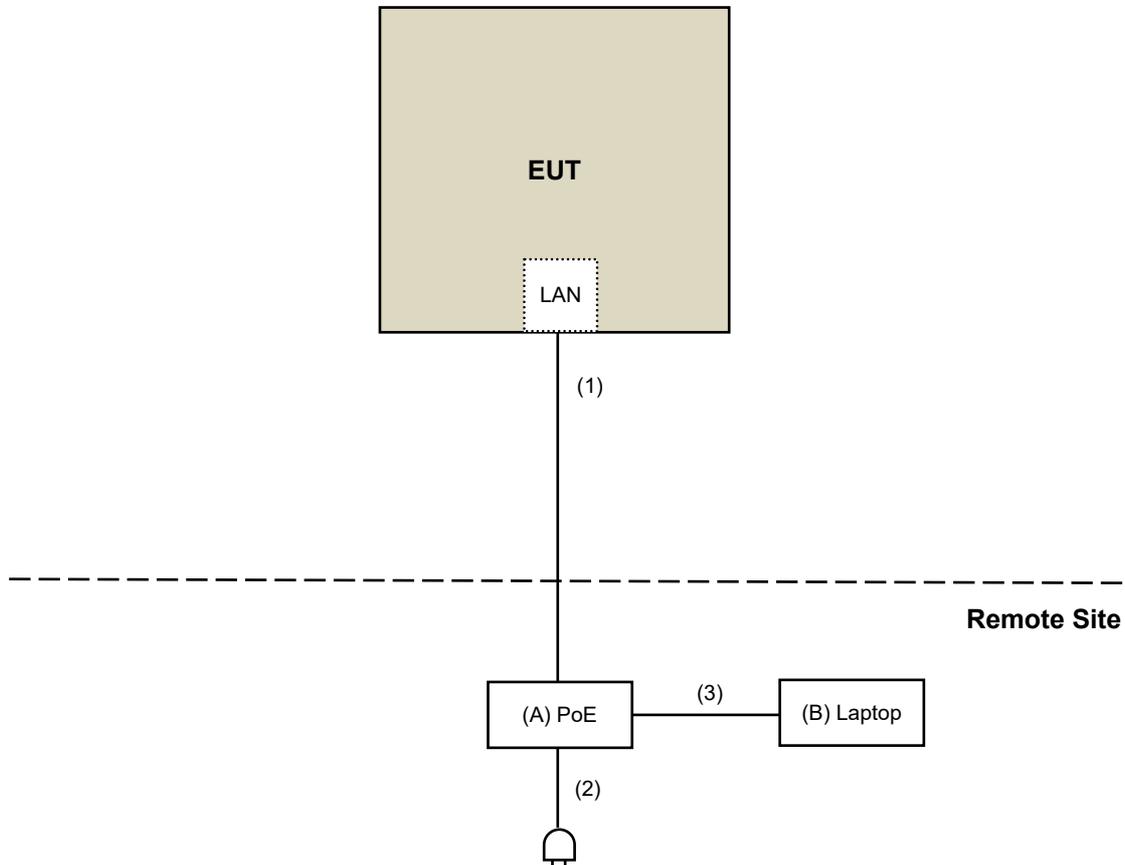

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For Radiated emission test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 06, 2020	July 05, 2021
Pre-Amplifier EMCI	EMC001340	980142	May 24, 2021	May 23, 2022
Loop Antenna Electro-Metrics	EM-6879	264	Mar. 05, 2021	Mar. 04, 2022
RF Cable	5D-FB	LOOPCAB-001	Jan. 07, 2021	Jan. 06, 2022
RF Cable	5D-FB	LOOPCAB-002	Jan. 07, 2021	Jan. 06, 2022
Pre-Amplifier Mini-Circuits	ZFL-1000VH2	QA0838008	Oct. 20, 2020	Oct. 19, 2021
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Nov. 05, 2020	Nov. 04, 2021
RF Cable	8D	966-3-1	Mar. 16, 2021	Mar. 15, 2022
RF Cable	8D	966-3-2	Mar. 16, 2021	Mar. 15, 2022
RF Cable	8D	966-3-3	Mar. 16, 2021	Mar. 15, 2022
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Sep. 24, 2020	Sep. 23, 2021
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 22, 2020	Nov. 21, 2021
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 11, 2021	Jan. 10, 2022
RF Cable	EMC104-SM-SM-1500	180504	Apr. 26, 2021	Apr. 25, 2022
RF Cable	EMC104-SM-SM-2000	180601	June 08, 2021	June 07, 2022
RF Cable	EMC104-SM-SM-6000	210201	May 13, 2021	May 12, 2022
Spectrum Analyzer Keysight	N9030A	MY54490679	July 13, 2020	July 12, 2021
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 11, 2021	Jan. 10, 2022
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 22, 2020	Nov. 21, 2021
RF Cable	EMC102-KM-KM-1200	160924	Jan. 11, 2021	Jan. 10, 2022
RF Cable	EMC-KM-KM-4000	200214	Mar. 10, 2021	Mar. 09, 2022
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. Tested Date: June 30 to July 03, 2021

For other test items:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	101516	Mar. 08, 2021	Mar. 07, 2022
Power meter Anritsu	ML2495A	1529002	June 21, 2021	June 20, 2022
Power sensor Anritsu	MA2411B	1339443	May 31, 2021	May 30, 2022
10dB Attenuator Woken	MDCS18N-10	MDCS18N-10-01	Apr. 13, 2021	Apr. 12, 2022
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- NOTE:**
1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: June 25, 2021

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

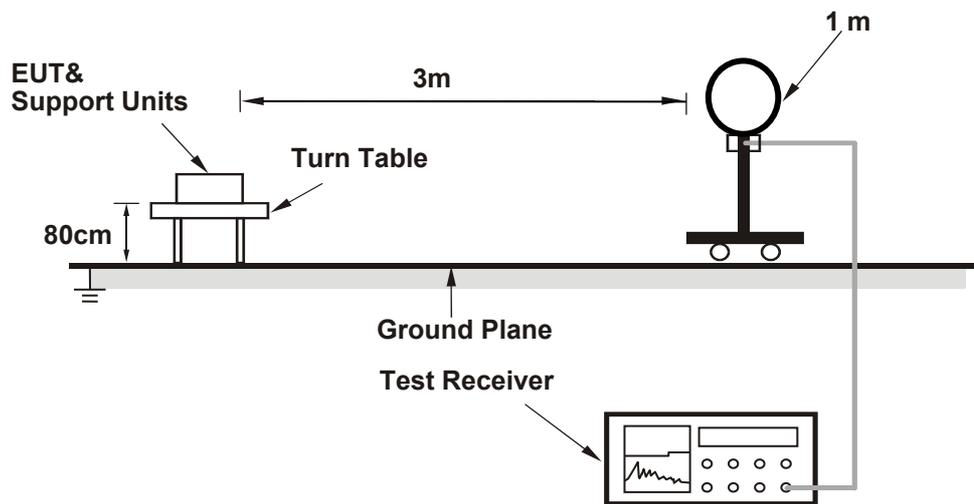

For Radiated emission 30MHz to 1GHz

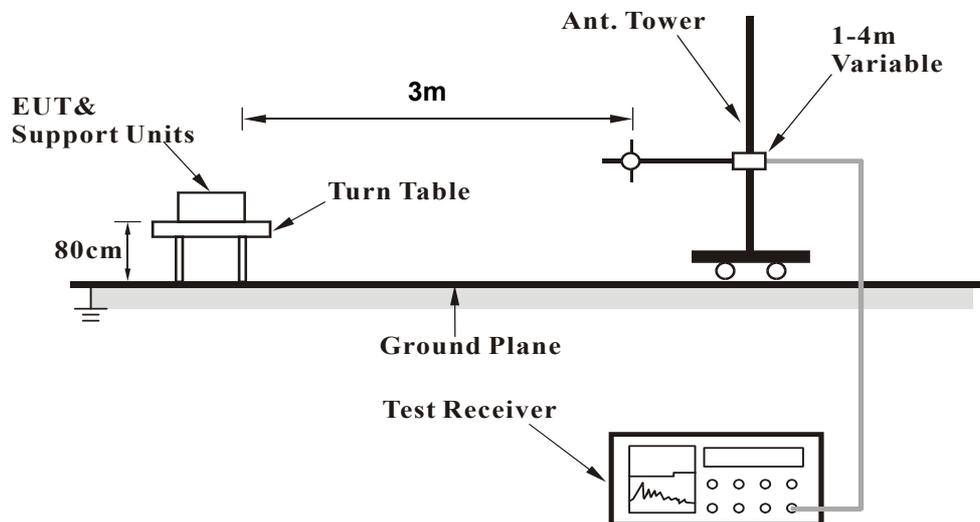

For Radiated emission above 1GHz

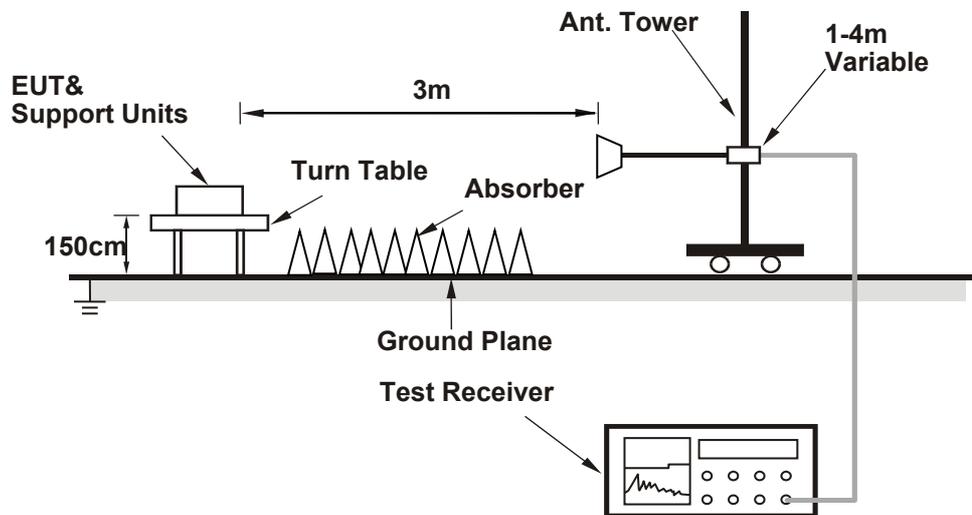

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Controlling software (SP META) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data:

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.6 PK	74.0	-17.4	2.16 H	53	57.8	-1.2
2	2390.00	46.0 AV	54.0	-8.0	2.16 H	53	47.2	-1.2
3	*2412.00	111.8 PK			2.16 H	53	113.0	-1.2
4	*2412.00	109.4 AV			2.16 H	53	110.6	-1.2
5	4824.00	47.3 PK	74.0	-26.7	1.61 H	170	43.6	3.7
6	4824.00	45.2 AV	54.0	-8.8	1.61 H	170	41.5	3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.30	57.3 PK	74.0	-16.7	1.53 V	266	58.5	-1.2
2	2389.30	46.7 AV	54.0	-7.3	1.53 V	266	47.9	-1.2
3	*2412.00	112.6 PK			1.53 V	266	113.8	-1.2
4	*2412.00	110.1 AV			1.53 V	266	111.3	-1.2
5	4824.00	51.2 PK	74.0	-22.8	1.53 V	168	47.5	3.7
6	4824.00	49.5 AV	54.0	-4.5	1.53 V	168	45.8	3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.4 PK	74.0	-15.6	2.17 H	54	59.6	-1.2
2	2390.00	45.3 AV	54.0	-8.7	2.17 H	54	46.5	-1.2
3	*2437.00	108.0 PK			2.17 H	54	109.2	-1.2
4	*2437.00	105.7 AV			2.17 H	54	106.9	-1.2
5	2483.50	65.0 PK	74.0	-9.0	2.17 H	54	66.2	-1.2
6	2483.50	49.6 AV	54.0	-4.4	2.17 H	54	50.8	-1.2
7	4874.00	47.3 PK	74.0	-26.7	1.64 H	184	43.5	3.8
8	4874.00	44.9 AV	54.0	-9.1	1.64 H	184	41.1	3.8
9	7311.00	45.8 PK	74.0	-28.2	2.15 H	210	36.1	9.7
10	7311.00	37.2 AV	54.0	-16.8	2.15 H	210	27.5	9.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.7 PK	74.0	-15.3	1.49 V	268	59.9	-1.2
2	2390.00	45.2 AV	54.0	-8.8	1.49 V	268	46.4	-1.2
3	*2437.00	108.1 PK			1.49 V	268	109.3	-1.2
4	*2437.00	105.9 AV			1.49 V	268	107.1	-1.2
5	2483.50	65.5 PK	74.0	-8.5	1.49 V	268	66.7	-1.2
6	2483.50	49.7 AV	54.0	-4.3	1.49 V	268	50.9	-1.2
7	4874.00	51.5 PK	74.0	-22.5	1.50 V	165	47.7	3.8
8	4874.00	49.7 AV	54.0	-4.3	1.50 V	165	45.9	3.8
9	7311.00	44.8 PK	74.0	-29.2	1.67 V	149	35.1	9.7
10	7311.00	34.6 AV	54.0	-19.4	1.67 V	149	24.9	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.5 PK			1.16 H	55	110.7	-1.2
2	*2462.00	107.4 AV			1.16 H	55	108.6	-1.2
3	2484.70	58.1 PK	74.0	-15.9	1.16 H	55	59.3	-1.2
4	2484.70	47.6 AV	54.0	-6.4	1.16 H	55	48.8	-1.2
5	4924.00	47.5 PK	74.0	-26.5	1.65 H	176	43.6	3.9
6	4924.00	44.8 AV	54.0	-9.2	1.65 H	176	40.9	3.9
7	7386.00	45.2 PK	74.0	-28.8	2.09 H	220	35.5	9.7
8	7386.00	36.7 AV	54.0	-17.3	2.09 H	220	27.0	9.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.6 PK			1.78 V	267	112.8	-1.2
2	*2462.00	109.4 AV			1.78 V	267	110.6	-1.2
3	2486.23	56.3 PK	74.0	-17.7	1.78 V	267	57.5	-1.2
4	2486.23	48.3 AV	54.0	-5.7	1.78 V	267	49.5	-1.2
5	2489.04	57.8 PK	74.0	-16.2	1.78 V	267	59.0	-1.2
6	2489.04	47.1 AV	54.0	-6.9	1.78 V	267	48.3	-1.2
7	4924.00	51.6 PK	74.0	-22.4	1.47 V	174	47.7	3.9
8	4924.00	49.7 AV	54.0	-4.3	1.47 V	174	45.8	3.9
9	7386.00	44.7 PK	74.0	-29.3	1.69 V	150	35.0	9.7
10	7386.00	34.4 AV	54.0	-19.6	1.69 V	150	24.7	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.5 PK	74.0	-11.5	1.04 H	58	63.7	-1.2
2	2390.00	48.8 AV	54.0	-5.2	1.04 H	58	50.0	-1.2
3	*2412.00	109.9 PK			1.04 H	58	111.1	-1.2
4	*2412.00	99.2 AV			1.04 H	58	100.4	-1.2
5	4824.00	45.3 PK	74.0	-28.7	1.68 H	106	41.6	3.7
6	4824.00	33.5 AV	54.0	-20.5	1.68 H	106	29.8	3.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.3 PK	74.0	-11.7	1.55 V	267	63.5	-1.2
2	2390.00	49.2 AV	54.0	-4.8	1.55 V	267	50.4	-1.2
3	*2412.00	110.3 PK			1.55 V	267	111.5	-1.2
4	*2412.00	99.3 AV			1.55 V	267	100.5	-1.2
5	4824.00	46.6 PK	74.0	-27.4	1.53 V	145	42.9	3.7
6	4824.00	34.5 AV	54.0	-19.5	1.53 V	145	30.8	3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.7 PK	74.0	-16.3	1.57 H	282	58.9	-1.2
2	2390.00	44.1 AV	54.0	-9.9	1.57 H	282	45.3	-1.2
3	*2437.00	117.1 PK			1.13 H	41	118.3	-1.2
4	*2437.00	105.9 AV			1.13 H	41	107.1	-1.2
5	2483.50	66.4 PK	74.0	-7.6	1.50 H	283	67.6	-1.2
6	2483.50	49.4 AV	54.0	-4.6	1.50 H	283	50.6	-1.2
7	4874.00	45.3 PK	74.0	-28.7	1.69 H	111	41.5	3.8
8	4874.00	33.5 AV	54.0	-20.5	1.69 H	111	29.7	3.8
9	7311.00	44.6 PK	74.0	-29.4	2.13 H	212	34.9	9.7
10	7311.00	36.2 AV	54.0	-17.8	2.13 H	212	26.5	9.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.5 PK	74.0	-15.5	1.74 V	269	59.7	-1.2
2	2390.00	45.2 AV	54.0	-8.8	1.74 V	269	46.4	-1.2
3	*2437.00	116.9 PK			1.75 V	270	118.1	-1.2
4	*2437.00	105.8 AV			1.75 V	270	107.0	-1.2
5	2483.50	65.3 PK	74.0	-8.7	1.77 V	274	66.5	-1.2
6	2483.50	49.8 AV	54.0	-4.2	1.77 V	274	51.0	-1.2
7	4874.00	47.3 PK	74.0	-26.7	1.53 V	160	43.5	3.8
8	4874.00	34.9 AV	54.0	-19.1	1.53 V	160	31.1	3.8
9	7311.00	44.9 PK	74.0	-29.1	1.66 V	142	35.2	9.7
10	7311.00	34.7 AV	54.0	-19.3	1.66 V	142	25.0	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.4 PK			1.18 H	55	108.6	-1.2
2	*2462.00	97.2 AV			1.18 H	55	98.4	-1.2
3	2483.50	62.1 PK	74.0	-11.9	1.18 H	55	63.3	-1.2
4	2483.50	48.0 AV	54.0	-6.0	1.18 H	55	49.2	-1.2
5	4924.00	45.4 PK	74.0	-28.6	1.69 H	120	41.5	3.9
6	4924.00	33.5 AV	54.0	-20.5	1.69 H	120	29.6	3.9
7	7386.00	45.7 PK	74.0	-28.3	2.06 H	234	36.0	9.7
8	7386.00	37.1 AV	54.0	-16.9	2.06 H	234	27.4	9.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.4 PK			1.77 V	267	111.6	-1.2
2	*2462.00	99.5 AV			1.77 V	267	100.7	-1.2
3	2483.50	69.1 PK	74.0	-4.9	1.77 V	267	70.3	-1.2
4	2483.50	50.0 AV	54.0	-4.0	1.77 V	267	51.2	-1.2
5	4924.00	47.1 PK	74.0	-26.9	1.51 V	153	43.2	3.9
6	4924.00	34.7 AV	54.0	-19.3	1.51 V	153	30.8	3.9
7	7386.00	44.3 PK	74.0	-29.7	1.73 V	153	34.6	9.7
8	7386.00	34.2 AV	54.0	-19.8	1.73 V	153	24.5	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.3 PK	74.0	-7.7	1.02 H	58	67.5	-1.2
2	2390.00	49.4 AV	54.0	-4.6	1.02 H	58	50.6	-1.2
3	*2412.00	109.1 PK			1.02 H	58	110.3	-1.2
4	*2412.00	98.4 AV			1.02 H	58	99.6	-1.2
5	4824.00	45.4 PK	74.0	-28.6	1.67 H	108	41.7	3.7
6	4824.00	33.4 AV	54.0	-20.6	1.67 H	108	29.7	3.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	1.49 V	267	66.5	-1.2
2	2390.00	49.3 AV	54.0	-4.7	1.49 V	267	50.5	-1.2
3	*2412.00	108.4 PK			1.49 V	267	109.6	-1.2
4	*2412.00	97.9 AV			1.49 V	267	99.1	-1.2
5	4824.00	47.1 PK	74.0	-26.9	1.44 V	149	43.4	3.7
6	4824.00	34.6 AV	54.0	-19.4	1.44 V	149	30.9	3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.3 PK	74.0	-15.7	1.53 H	283	59.5	-1.2
2	2390.00	44.4 AV	54.0	-9.6	1.53 H	283	45.6	-1.2
3	*2437.00	116.2 PK			1.16 H	51	117.4	-1.2
4	*2437.00	104.8 AV			1.16 H	51	106.0	-1.2
5	2483.50	66.2 PK	74.0	-7.8	1.53 H	283	67.4	-1.2
6	2483.50	48.9 AV	54.0	-5.1	1.53 H	283	50.1	-1.2
7	4874.00	45.3 PK	74.0	-28.7	1.71 H	134	41.5	3.8
8	4874.00	33.2 AV	54.0	-20.8	1.71 H	134	29.4	3.8
9	7311.00	45.5 PK	74.0	-28.5	2.09 H	231	35.8	9.7
10	7311.00	36.9 AV	54.0	-17.1	2.09 H	231	27.2	9.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.4 PK	74.0	-15.6	1.78 V	278	59.6	-1.2
2	2390.00	44.9 AV	54.0	-9.1	1.78 V	278	46.1	-1.2
3	*2437.00	116.5 PK			1.78 V	278	117.7	-1.2
4	*2437.00	105.0 AV			1.78 V	278	106.2	-1.2
5	2483.50	65.1 PK	74.0	-8.9	1.78 V	278	66.3	-1.2
6	2483.50	49.5 AV	54.0	-4.5	1.78 V	278	50.7	-1.2
7	4874.00	47.3 PK	74.0	-26.7	1.48 V	141	43.5	3.8
8	4874.00	34.6 AV	54.0	-19.4	1.48 V	141	30.8	3.8
9	7311.00	43.9 PK	74.0	-30.1	1.71 V	153	34.2	9.7
10	7311.00	34.0 AV	54.0	-20.0	1.71 V	153	24.3	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.0 PK			1.16 H	55	109.2	-1.2
2	*2462.00	97.6 AV			1.16 H	55	98.8	-1.2
3	2483.50	69.1 PK	74.0	-4.9	1.16 H	55	70.3	-1.2
4	2483.50	49.6 AV	54.0	-4.4	1.16 H	55	50.8	-1.2
5	4924.00	45.7 PK	74.0	-28.3	1.70 H	111	41.8	3.9
6	4924.00	33.8 AV	54.0	-20.2	1.70 H	111	29.9	3.9
7	7386.00	45.5 PK	74.0	-28.5	2.10 H	239	35.8	9.7
8	7386.00	37.2 AV	54.0	-16.8	2.10 H	239	27.5	9.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.4 PK			1.78 V	267	111.6	-1.2
2	*2462.00	98.9 AV			1.78 V	267	100.1	-1.2
3	2483.50	68.9 PK	74.0	-5.1	1.78 V	267	70.1	-1.2
4	2483.50	50.0 AV	54.0	-4.0	1.78 V	267	51.2	-1.2
5	4924.00	46.8 PK	74.0	-27.2	1.50 V	159	42.9	3.9
6	4924.00	34.5 AV	54.0	-19.5	1.50 V	159	30.6	3.9
7	7386.00	44.0 PK	74.0	-30.0	1.72 V	138	34.3	9.7
8	7386.00	34.2 AV	54.0	-19.8	1.72 V	138	24.5	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.


Below 1GHz Data:

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.45	28.6 QP	40.0	-11.4	2.00 H	126	37.8	-9.2
2	55.57	28.7 QP	40.0	-11.3	2.00 H	247	37.0	-8.3
3	88.34	25.9 QP	43.5	-17.6	2.00 H	255	39.7	-13.8
4	179.55	32.6 QP	43.5	-10.9	1.50 H	43	41.7	-9.1
5	254.49	25.9 QP	46.0	-20.1	1.00 H	124	34.4	-8.5
6	443.59	26.7 QP	46.0	-19.3	1.50 H	29	28.9	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

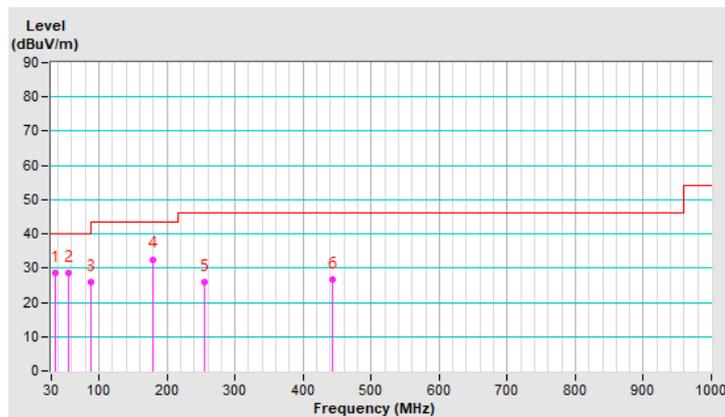


RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.35	32.9 QP	40.0	-7.1	1.50 V	341	42.2	-9.3
2	60.67	25.6 QP	40.0	-14.4	1.00 V	142	34.5	-8.9
3	115.25	22.8 QP	43.5	-20.7	1.50 V	351	33.0	-10.2
4	176.89	25.8 QP	43.5	-17.7	1.00 V	337	34.7	-8.9
5	186.30	30.5 QP	43.5	-13.0	1.00 V	126	40.4	-9.9
6	435.50	25.9 QP	46.0	-20.1	2.00 V	322	28.3	-2.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

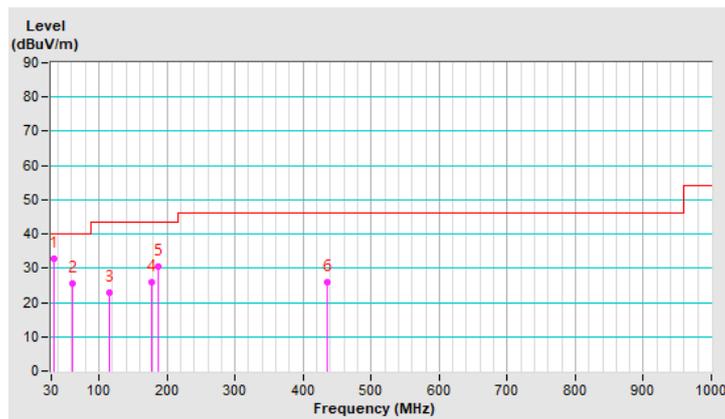

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 20, 2020	Oct. 19, 2021
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 27, 2020	Oct. 26, 2021
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 26, 2021	Mar. 25, 2022
50 ohms Terminator	50	3	Oct. 26, 2020	Oct. 25, 2021
RF Cable	5D-FB	COCCAB-001	Sep. 26, 2020	Sep. 25, 2021
Fixed attenuator EMCI	STI02-2200-10	005	Aug. 29, 2020	Aug. 28, 2021
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: July 03, 2021

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

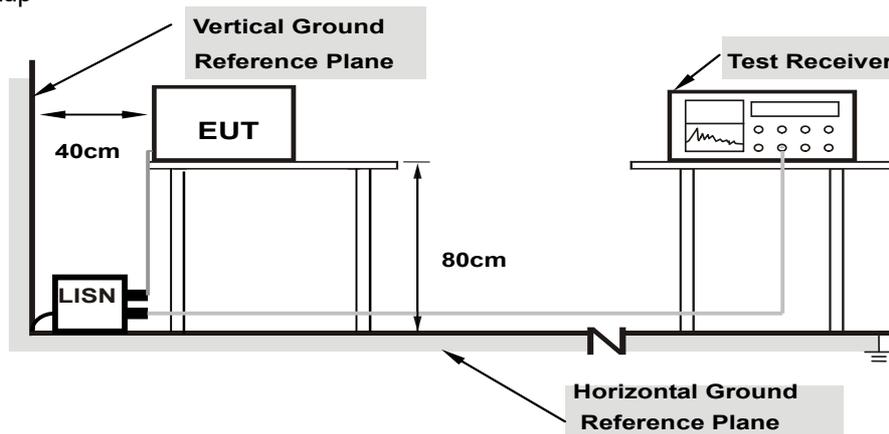

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.95	31.53	17.61	41.48	27.56	65.79	55.79	-24.31	-28.23
2	0.20078	9.97	36.94	27.71	46.91	37.68	63.58	53.58	-16.67	-15.90
3	0.38438	9.99	18.96	11.23	28.95	21.22	58.18	48.18	-29.23	-26.96
4	0.75156	10.01	15.68	6.69	25.69	16.70	56.00	46.00	-30.31	-29.30
5	14.83594	10.82	34.49	33.79	45.31	44.61	60.00	50.00	-14.69	-5.39
6	28.92969	11.29	23.68	23.21	34.97	34.50	60.00	50.00	-25.03	-15.50

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

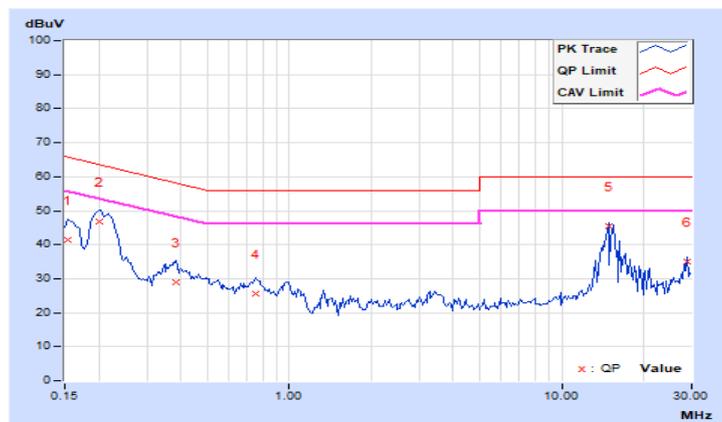


RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.92	32.40	18.63	42.32	28.55	65.58	55.58	-23.26	-27.03
2	0.20078	9.95	33.81	23.73	43.76	33.68	63.58	53.58	-19.82	-19.90
3	0.36875	9.96	15.42	4.98	25.38	14.94	58.53	48.53	-33.15	-33.59
4	3.14063	10.09	11.55	2.47	21.64	12.56	56.00	46.00	-34.36	-33.44
5	14.84375	10.63	31.75	28.67	42.38	39.30	60.00	50.00	-17.62	-10.70
6	27.45313	10.91	27.12	24.87	38.03	35.78	60.00	50.00	-21.97	-14.22

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

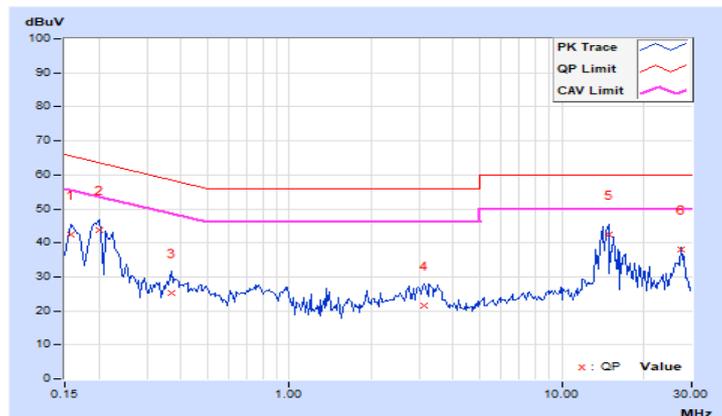


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup

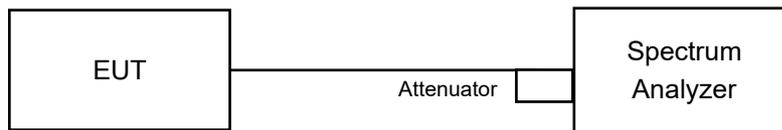

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	8.1	0.5	Pass
6	2437	8.59	0.5	Pass
11	2462	8.11	0.5	Pass

802.11g


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	15.72	0.5	Pass
6	2437	16.13	0.5	Pass
11	2462	12.63	0.5	Pass

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	16.37	0.5	Pass
6	2437	16.44	0.5	Pass
11	2462	12.62	0.5	Pass

Spectrum Plot of Worst Value


802.11b / CH1

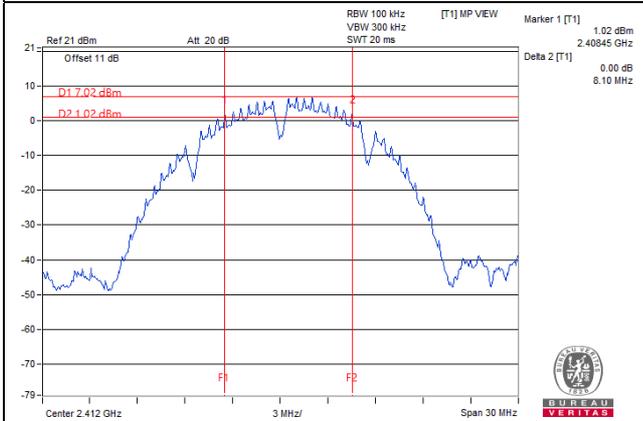

802.11g / CH11

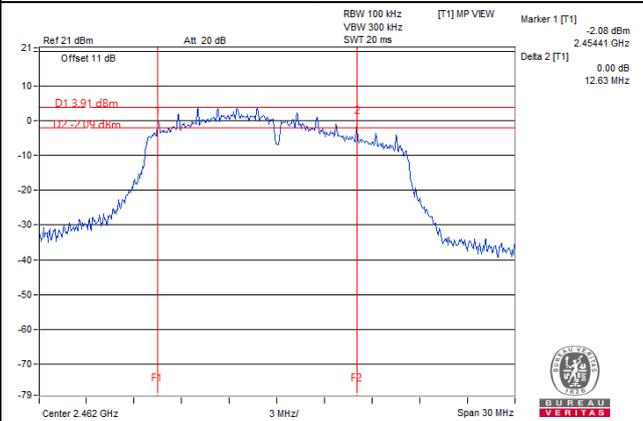

802.11n (HT20) / CH11

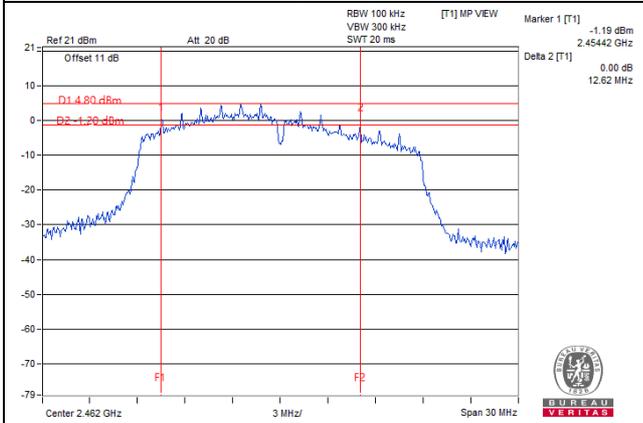


4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 Test Setup

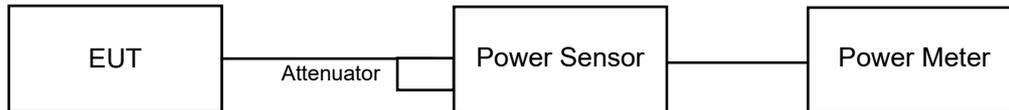

4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

FOR PEAK POWER

802.11b

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	53.456	17.28	30	Pass
6	2437	76.736	18.85	30	Pass
11	2462	126.183	21.01	30	Pass

802.11g

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	180.302	22.56	30	Pass
6	2437	300.608	24.78	30	Pass
11	2462	176.604	22.47	30	Pass

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	168.655	22.27	30	Pass
6	2437	286.418	24.57	30	Pass
11	2462	190.985	22.81	30	Pass

FOR AVERAGE POWER

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	31.55	14.99
6	2437	46.989	16.72
11	2462	84.528	19.27

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	42.073	16.24
6	2437	146.893	21.67
11	2462	24.604	13.91

802.11n (HT20)


Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	36.813	15.66
6	2437	111.173	20.46
11	2462	25.527	14.07

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup

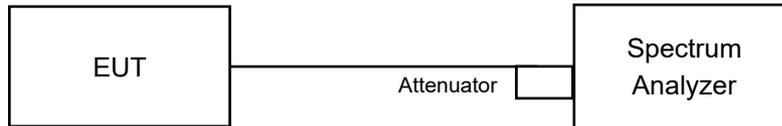

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set the VBW $\geq 3 \times \text{RBW}$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
1	2412	-6.89	8.00	Pass
6	2437	-5.89	8.00	Pass
11	2462	-4.18	8.00	Pass

802.11g


Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
1	2412	-8.25	8.00	Pass
6	2437	-3.24	8.00	Pass
11	2462	-9.75	8.00	Pass

802.11n (HT20)


Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
1	2412	-9.24	8.00	Pass
6	2437	-4.79	8.00	Pass
11	2462	-9.89	8.00	Pass

Spectrum Plot of Worst Value


802.11b / CH11

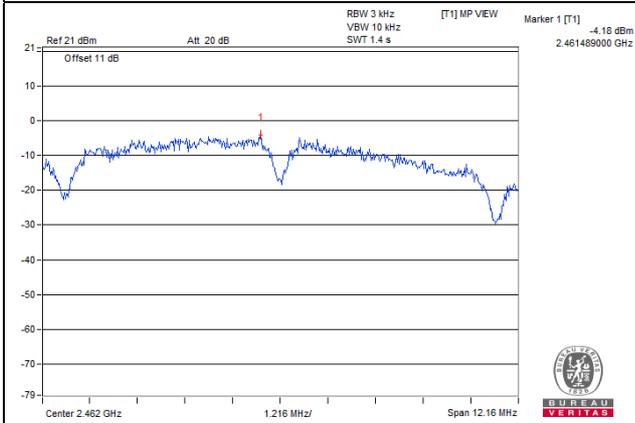

802.11g / CH6

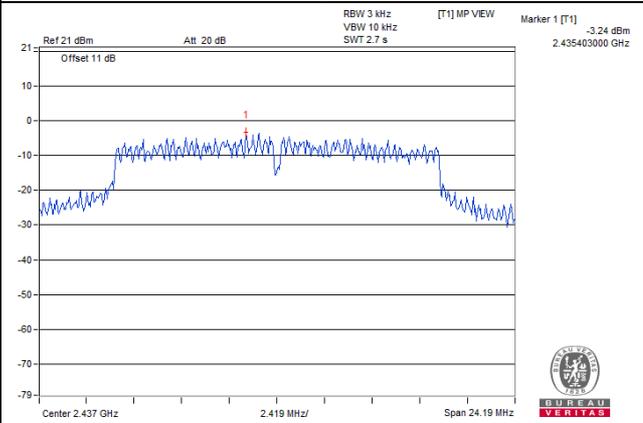

802.11n (HT20) / CH6

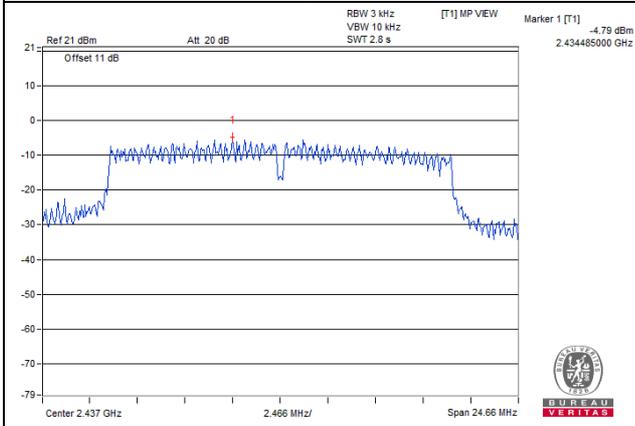


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup

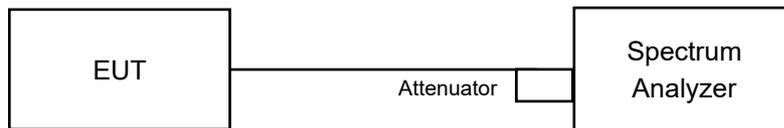

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition



Same as Item 4.3.6

4.6.7 Test Results



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b



CH 1

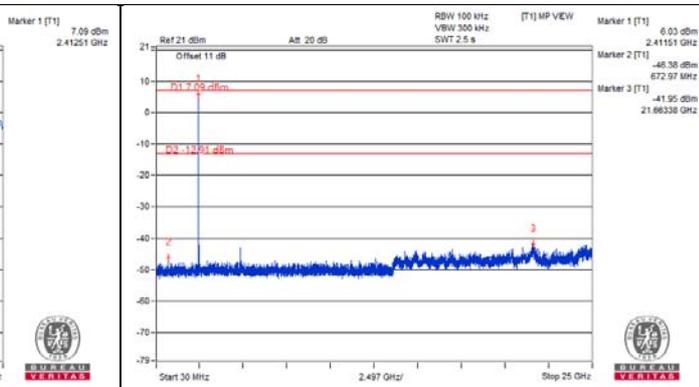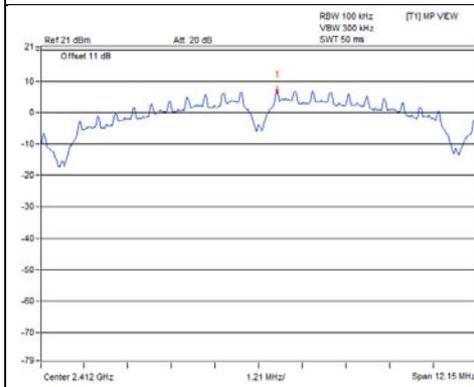



CH 6

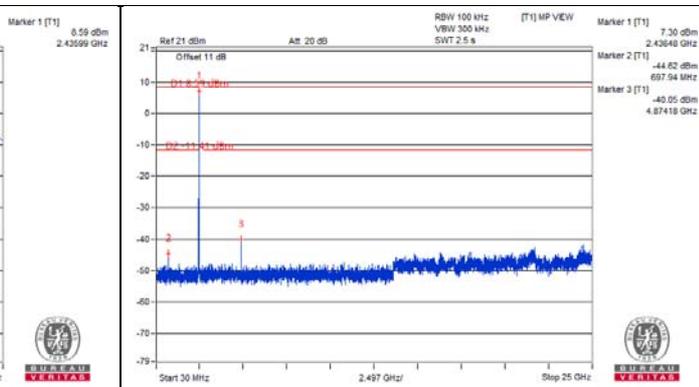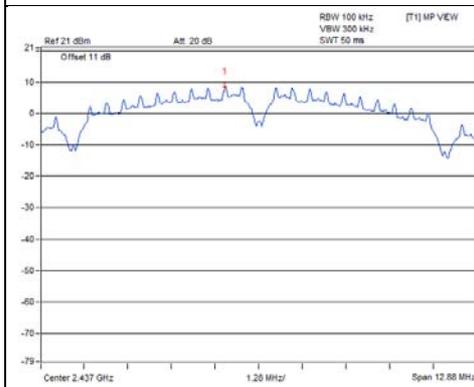

CH 11

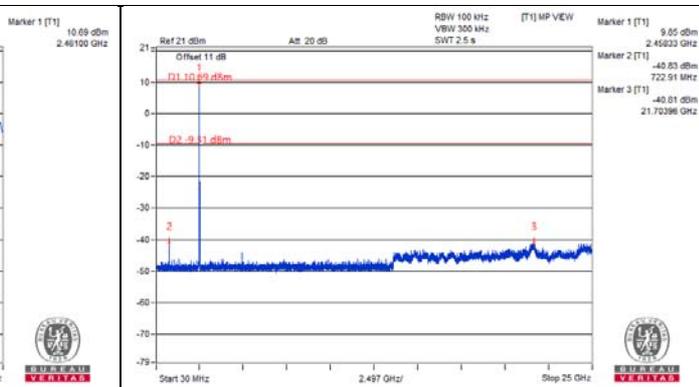
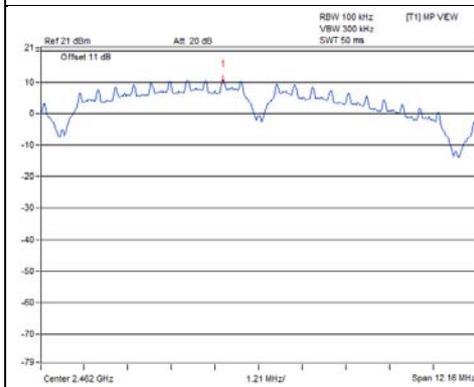


CH 1 Band edge

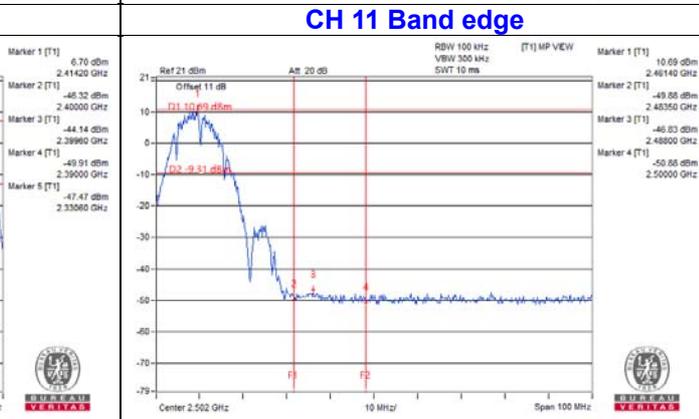
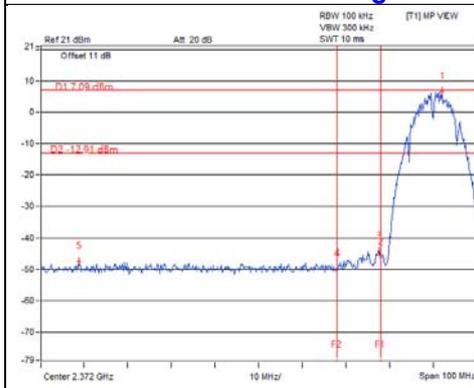


802.11g



CH 1

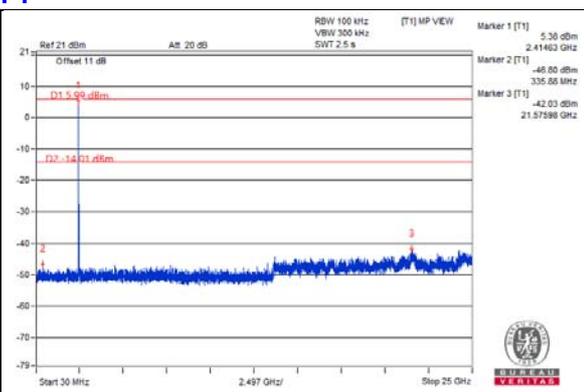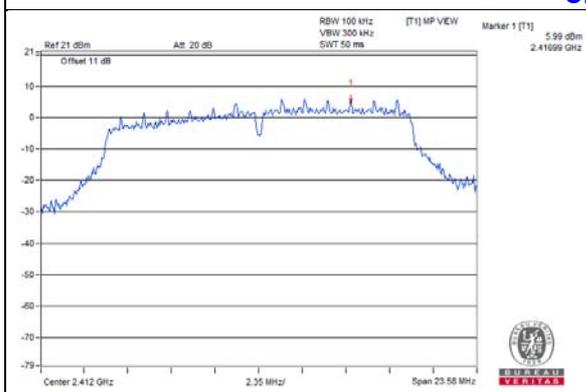



CH 6

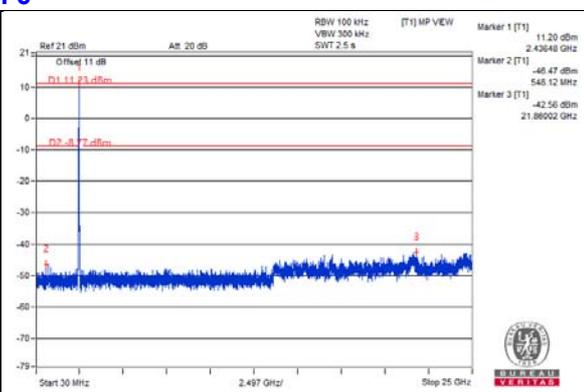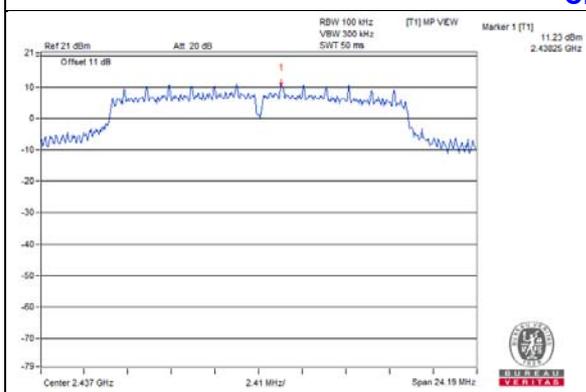

CH 11

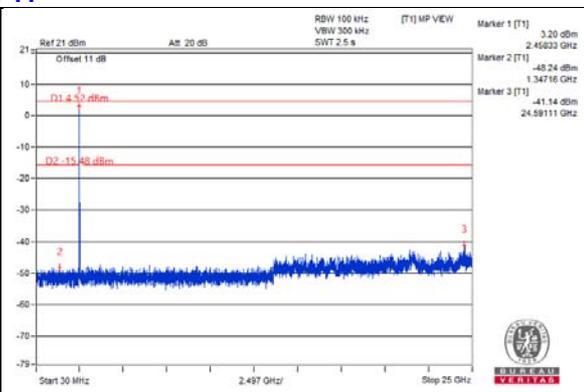
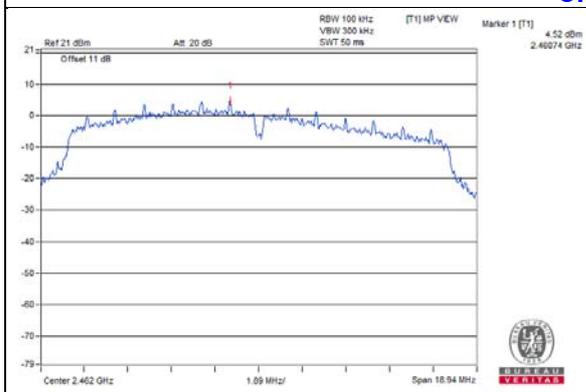


CH 1 Band edge

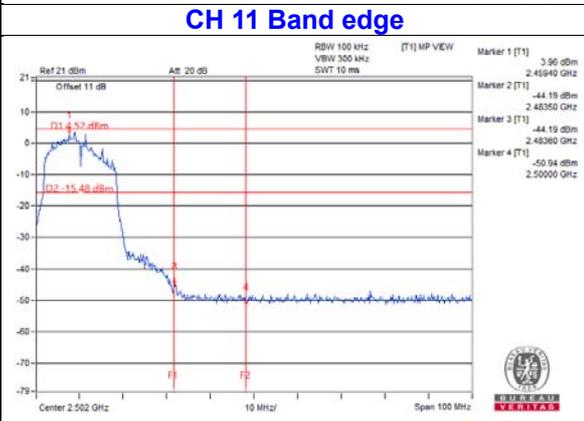
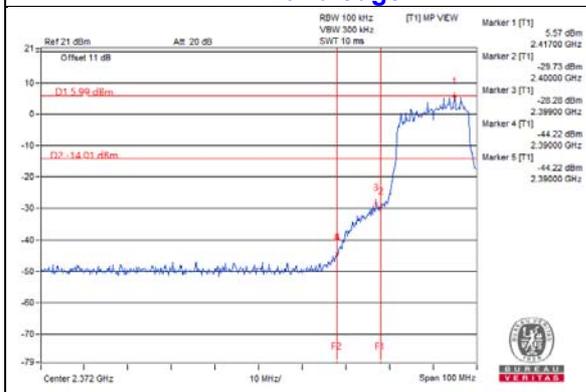


802.11n (HT20)



CH 1

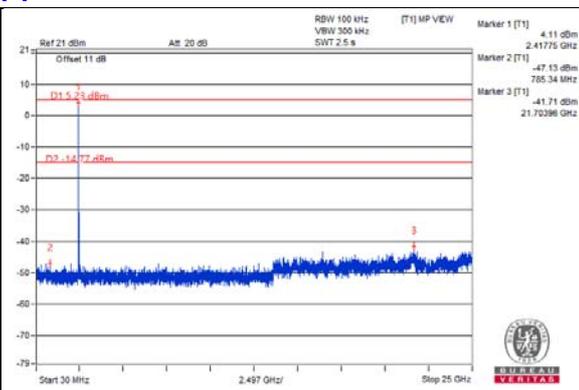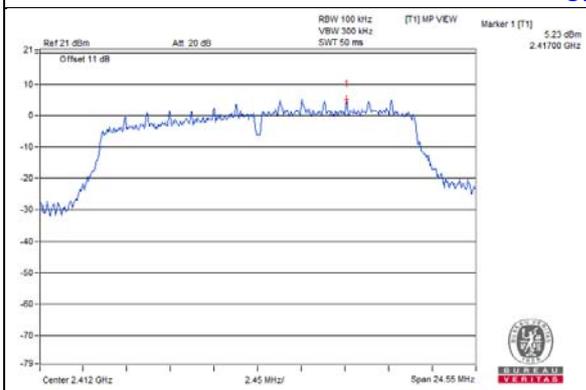


CH 6

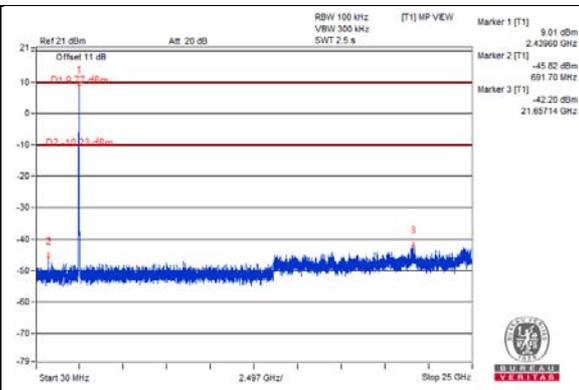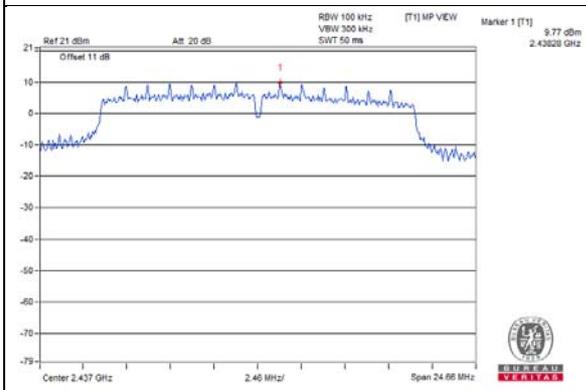


CH 11

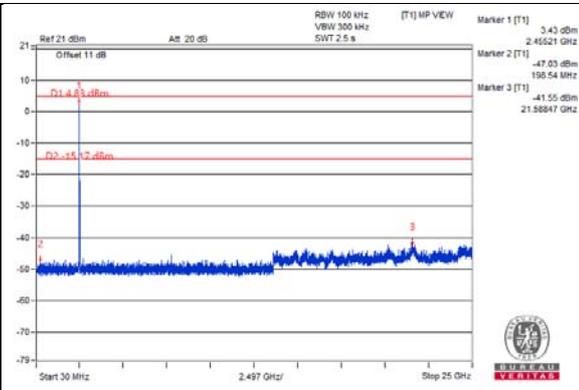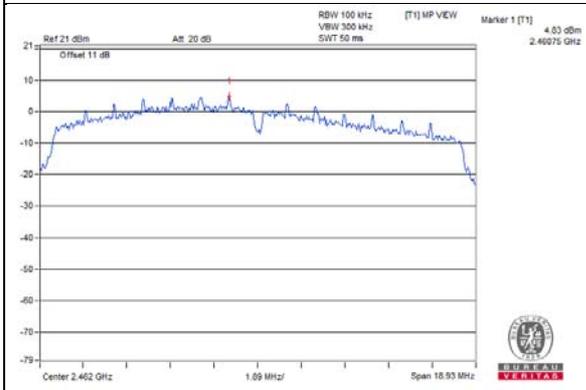

CH 1 Band edge

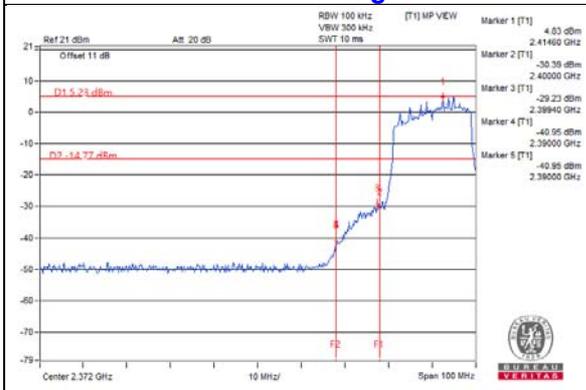


CH 11 Band edge

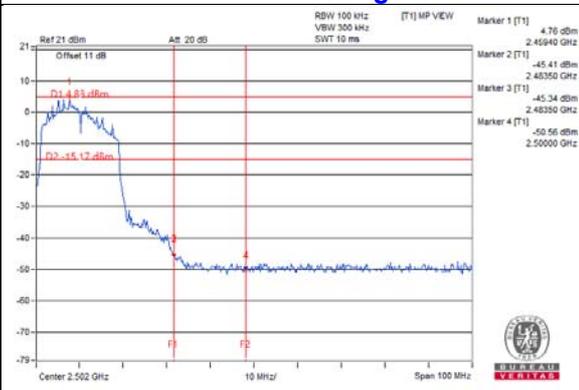

5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A - Band-Edge Measurement

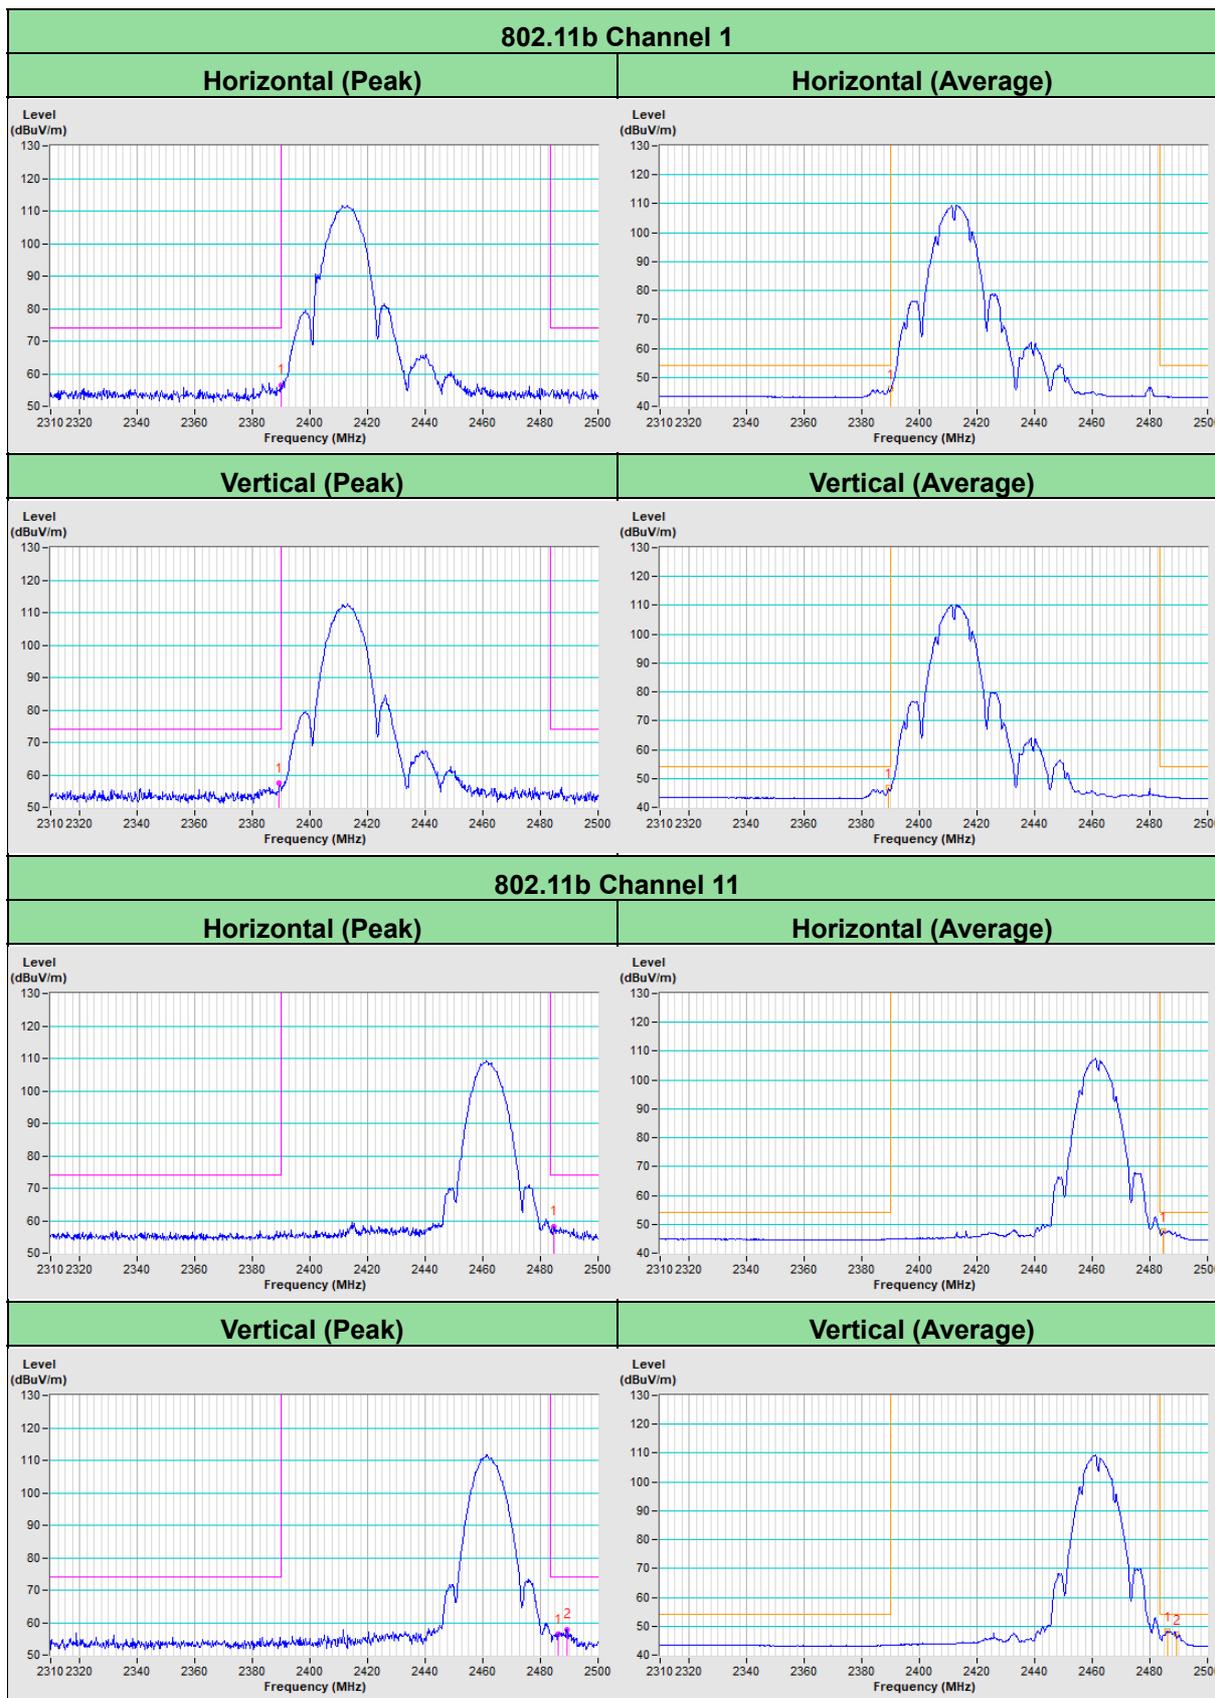


802.11g Channel 1

Horizontal (Peak)	Horizontal (Average)
-------------------	----------------------

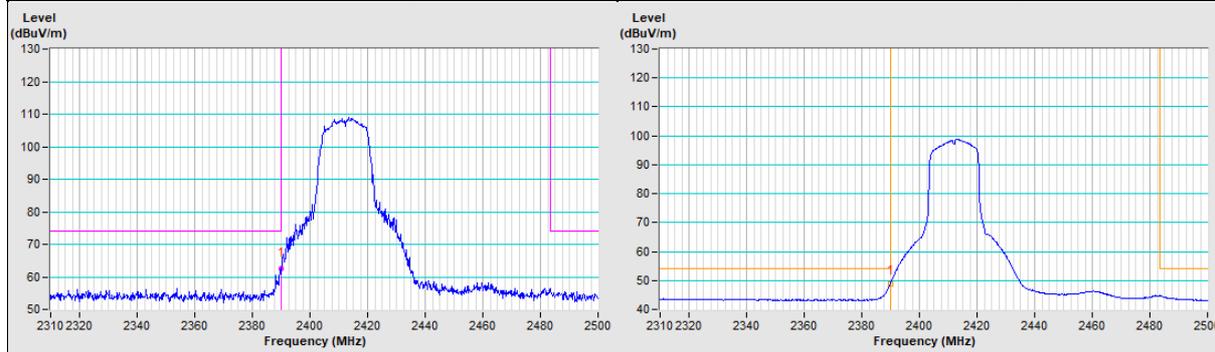


Vertical (Peak)	Vertical (Average)
-----------------	--------------------

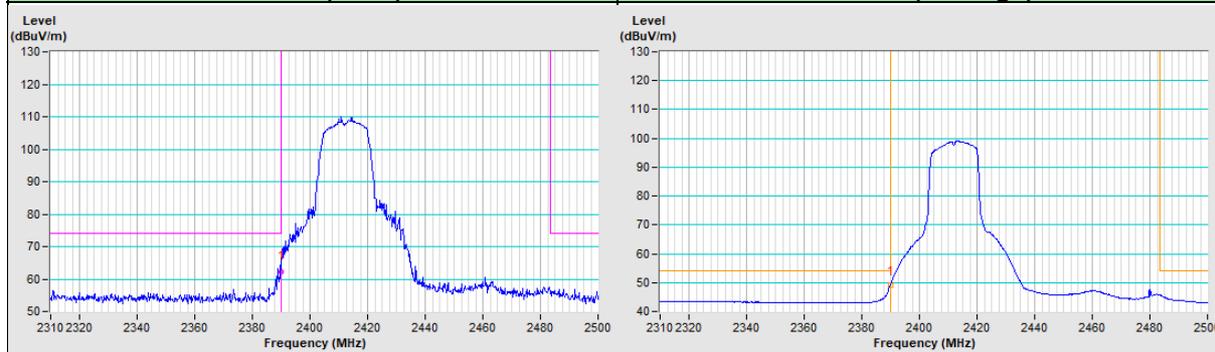


802.11g Channel 11

Horizontal (Peak)	Horizontal (Average)
-------------------	----------------------

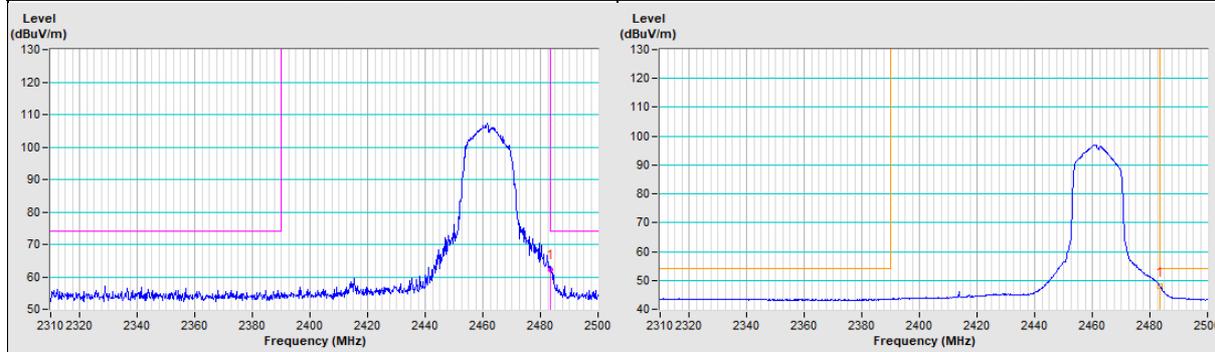


Vertical (Peak)	Vertical (Average)
-----------------	--------------------

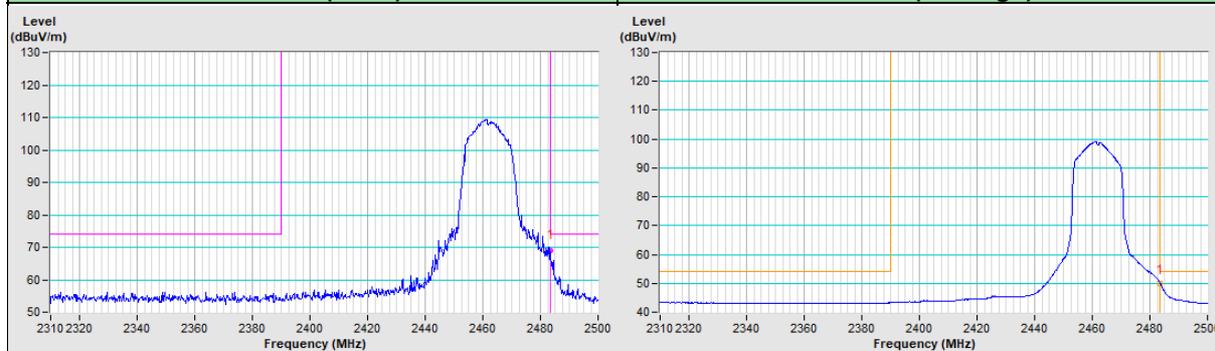


802.11n (HT20) Channel 1

Horizontal (Peak)	Horizontal (Average)
-------------------	----------------------

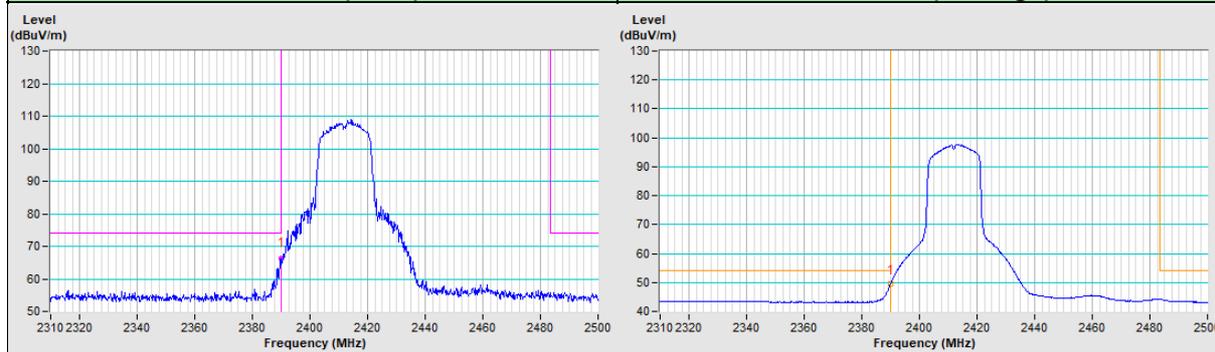


Vertical (Peak)	Vertical (Average)
-----------------	--------------------

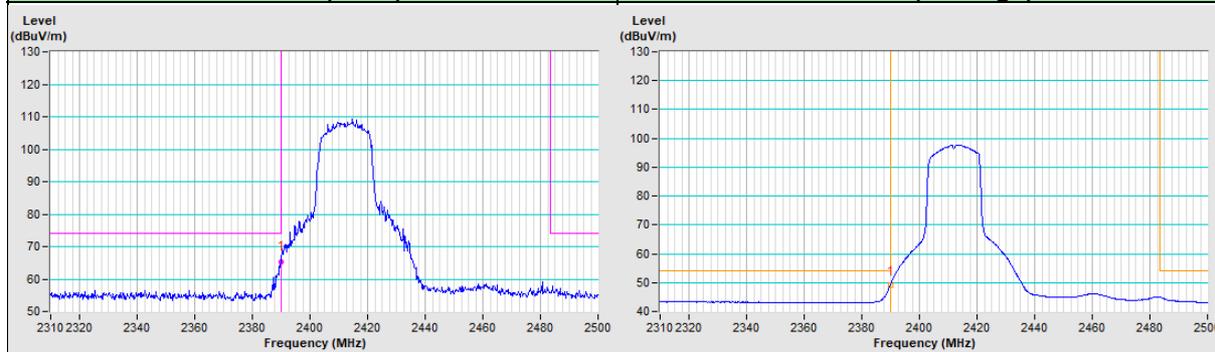


802.11n (HT20) Channel 11

Horizontal (Peak)	Horizontal (Average)
-------------------	----------------------

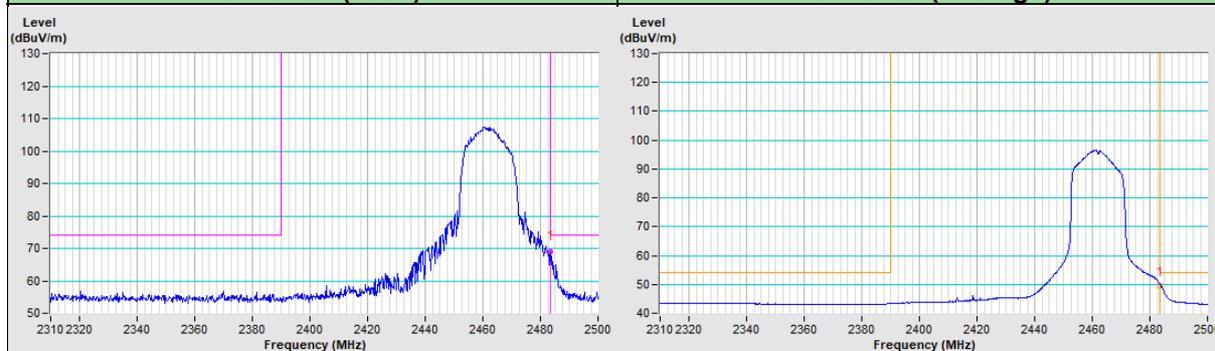

Vertical (Peak)	Vertical (Average)
-----------------	--------------------

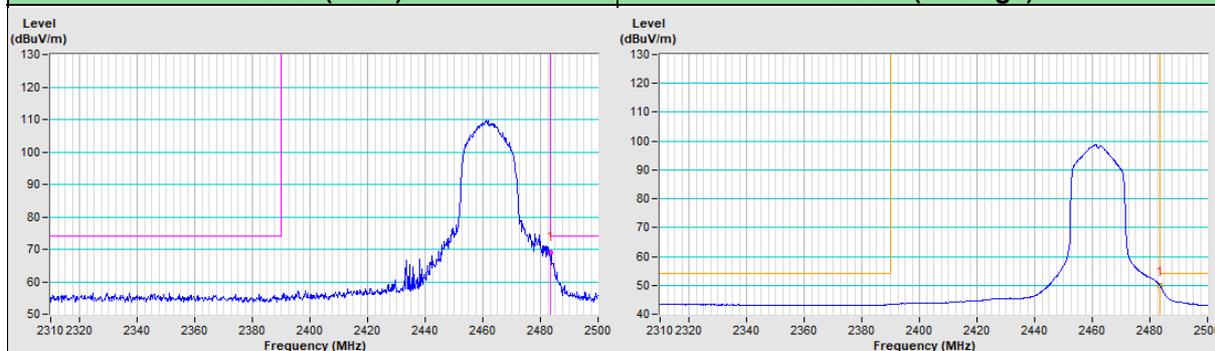

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---