

FCC Test Report (2.4GHz WLAN)

Report No.: RFBDKG-WTW-P21070273

FCC ID: JNZVR0030

Test Model: VR0030

Received Date: 2021/7/9

Test Date: 2021/7/28 ~ 2021/8/17

Issued Date: 2021/9/1

Applicant: LOGITECH FAR EAST LTD.

Address: 7700 Gateway Boulevard Newark California United States

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT (2.4GHz WLAN)	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	14
3.5 General Description of Applied Standards and References	15
4 Test Types and Results	16
4.1 Radiated Emission and Bandedge Measurement.....	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement	16
4.1.2 Test Instruments	17
4.1.3 Test Procedures.....	19
4.1.4 Deviation from Test Standard	19
4.1.5 Test Setup.....	20
4.1.6 EUT Operating Conditions.....	21
4.1.7 Test Results	22
4.2 Conducted Emission Measurement	33
4.2.1 Limits of Conducted Emission Measurement	33
4.2.2 Test Instruments	33
4.2.3 Test Procedures.....	34
4.2.4 Deviation from Test Standard	34
4.2.5 Test Setup.....	34
4.2.6 EUT Operating Conditions.....	34
4.2.7 Test Results	35
4.3 6dB Bandwidth Measurement	37
4.3.1 Limits of 6dB Bandwidth Measurement.....	37
4.3.2 Test Setup.....	37
4.3.3 Test Instruments	37
4.3.4 Test Procedure	37
4.3.5 Deviation from Test Standard	37
4.3.6 EUT Operating Conditions.....	37
4.3.7 Test Result.....	38
4.4 Conducted Output Power Measurement.....	40
4.4.1 Limits of Conducted Output Power Measurement	40
4.4.2 Test Setup.....	40
4.4.3 Test Instruments	40
4.4.4 Test Procedures.....	40
4.4.5 Deviation from Test Standard	40
4.4.6 EUT Operating Conditions.....	40
4.4.7 Test Results	41
4.5 Power Spectral Density Measurement.....	43
4.5.1 Limits of Power Spectral Density Measurement	43
4.5.2 Test Setup.....	43
4.5.3 Test Instruments	43
4.5.4 Test Procedure	43
4.5.5 Deviation from Test Standard	43
4.5.6 EUT Operating Condition	43

4.5.7 Test Results	44
4.6 Conducted Out of Band Emission Measurement	46
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	46
4.6.2 Test Setup.....	46
4.6.3 Test Instruments	46
4.6.4 Test Procedure	46
4.6.5 Deviation from Test Standard	46
4.6.6 EUT Operating Condition	46
4.6.7 Test Results	46
5 Pictures of Test Arrangements.....	53
Annex A - Band-Edge Measurement.....	54
Appendix – Information of the Testing Laboratories	57

Release Control Record

Issue No.	Description	Date Issued
RFBDKG-WTW-P21070273	Original release.	2021/9/1

1 Certificate of Conformity

Product: RoomMate

Brand: logitech

Test Model: VR0030

Sample Status: Engineering sample

Applicant: LOGITECH FAR EAST LTD.

Test Date: 2021/7/28 ~ 2021/8/17

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Vivian Huang , **Date:** 2021/9/1
Vivian Huang / Specialist

Approved by : Clark Lin , **Date:** 2021/9/1
Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -24.30 dB at 23.13672 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -4.1 dB at 4824.00 MHz, 4874.00 MHz, 2390.00 MHz and 2483.50 MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is MHF(I-PEX) not a standard connector.

Note:

- For 2.4 GHz band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Conducted emissions	-	2.5 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.4 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.3 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (2.4GHz WLAN)

Product	RoomMate
Brand	logitech
Test Model	VR0030
Status of EUT	Engineering sample
Power Supply Rating	19 Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11 Mbps 802.11g: up to 54 Mbps 802.11n: up to 144.4 Mbps
Operating Frequency	2.412 ~ 2.462 GHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20): 11
Output Power	426.141 mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1; Remote x 1 (FCC ID: JNZRR0016)
Cable Supplied	NA

Note:

1. The EUT has below radios as following table:

Radio 1	Radio 2
WLAN (2.4GHz + 5GHz)	Bluetooth

2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4GHz)	WLAN (5GHz)
2	WLAN (2.4GHz)	Bluetooth
3	WLAN (5GHz)	Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT must be supplied with a power adapter and following below table:

Brand	Model No.	Spec.
logitech	DSA-90PFE-19 3 190474	Input: 100-240 Vac, 1.5 A, 50/60Hz AC power cord (shielded, 0.9 m) Output: 19 Vdc, 4.74 A DC output cable (shielded, 1.5 m, with one core)

4. The antennas provided to the EUT, please refer to the following table:

Antenna No.	RF Chain No.	Brand	Model	Antenna Net Gain(dBi)	Frequency Range (GHz)	Antenna Type	Connector Type
1	Chain 0	Speed	F-0R-CC-6029-001-00	3.89 3.69 1.96 3.3 2.84	2.4~2.4835 5.15~5.25 5.25~5.35 5.47~5.725 5.725~5.850	Monopole	MHF(I-PEX)
2	Chain 1	Speed	F-0R-CC-6029-002-00	2.1 4.5 3.95 4.59 4.92	2.4~2.4835 5.15~5.25 5.25~5.35 5.47~5.725 5.725~5.850	Monopole	MHF(I-PEX)

Note:

1. The Bluetooth technology will fix transmission on Chain (0).

5. The EUT incorporates a MIMO function:

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	2TX	2RX
802.11g	2TX	2RX
802.11n (HT20)	2TX	2RX

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

7. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Note:

The EUT had been pre-tested on the positioned of laying-flat and wall-mount. The worst case was found when positioned of on laying-flat.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE $\geq$ 1G	25deg. C, 71%RH	120Vac, 60Hz	Sampson Chen
RE<1G	24deg. C, 70%RH	120Vac, 60Hz	Sampson Chen
PLC	25deg. C, 71%RH	120Vac, 60Hz	Sampson Chen
APCM	25deg. C, 60%RH	120Vac, 60Hz	Leon Dai


3.3 Duty Cycle of Test Signal

Duty cycle of test signal is $\geq 98\%$, duty factor is not required.

802.11b: Duty cycle = 12.481 ms/12.587 ms = 0.992

802.11g: Duty cycle = 2.061 ms/2.102 ms = 0.98

802.11n (HT20): Duty cycle = 1.929 ms/1.969 ms = 0.98

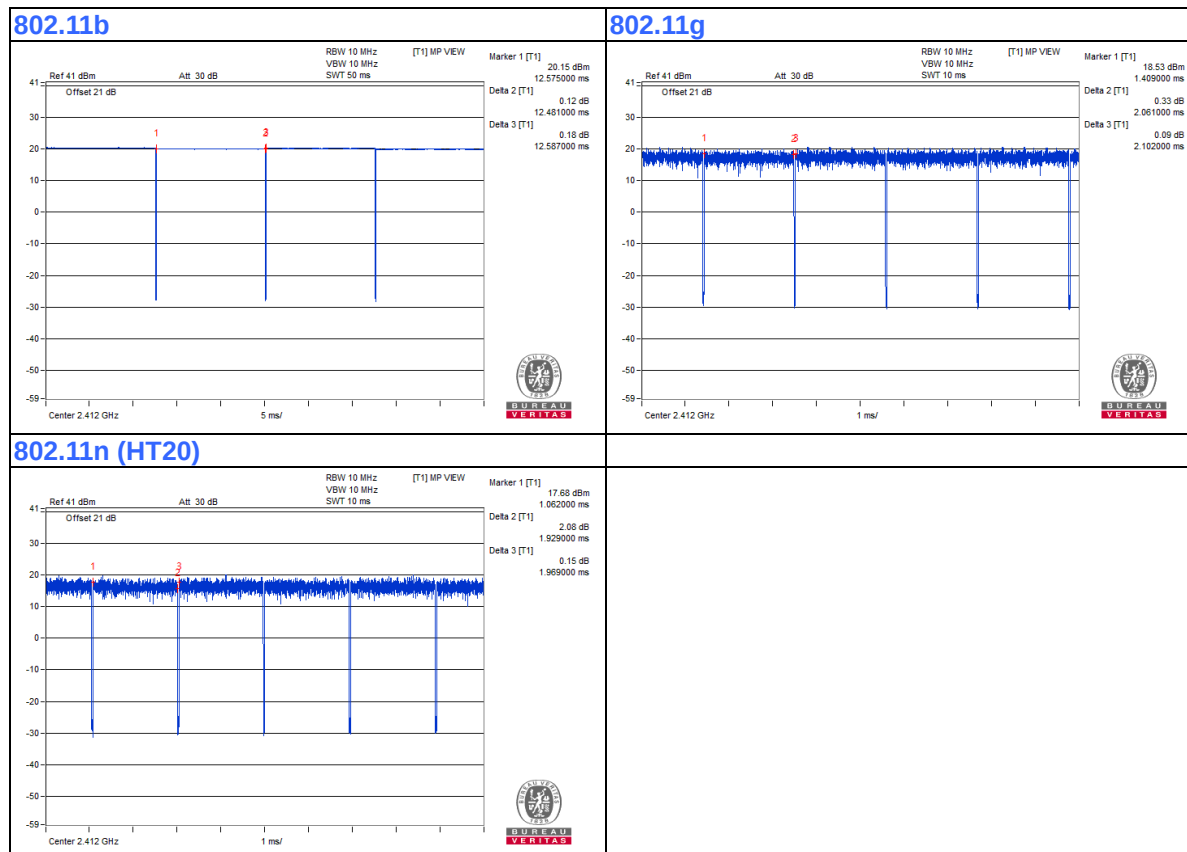

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Monitor	NEOKA	24NS50	NA	NA	Provided by Lab
B.	Monitor	DELL	P2415Q	CN-0J1P7F-QDC00-8 5L-13GB-A09	FCC DoC	Provided by Lab
C.	Mouse	Lemel	M857C	NA	NA	Provided by Lab
D.	Keyboard	Logitech	Y-U0009	NA	NA	Provided by Lab
E.	Camera	Logitech	VU0062	NA	NA	Supplied by client
F.	Laptop	Lenovo	20U5S01X00 L14	PF-1ANPYA	FCC DoC	Provided by Lab
G.	Router	ASUS	RT-N12+	NA	NA	Provided by Lab


Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	HDMI Cable	1	1.8	Yes	0	Provided by Lab
2.	HDMI Cable	1	3	Yes	0	Provided by Lab
3.	DC Cable	1	1.5	Yes	1	Supplied by client
4.	AC Cable	1	0.9	Yes	0	Supplied by client
5.	RJ-45 Cable	1	10	No	0	Provided by Lab
6.	HDMI Cable	1	1.8	Yes	0	Provided by Lab
7.	USB Cable	1	1.4	Yes	0	Provided by Lab
8.	USB Cable	1	1.5	Yes	0	Provided by Lab
9.	USB Cable	1	1.8	Yes	1	Supplied by client
10.	RJ-45 Cable	1	10	No	0	Provided by Lab

Note: The core(s) is(are) originally attached to the cable(s).

3.4.1 Configuration of System under Test

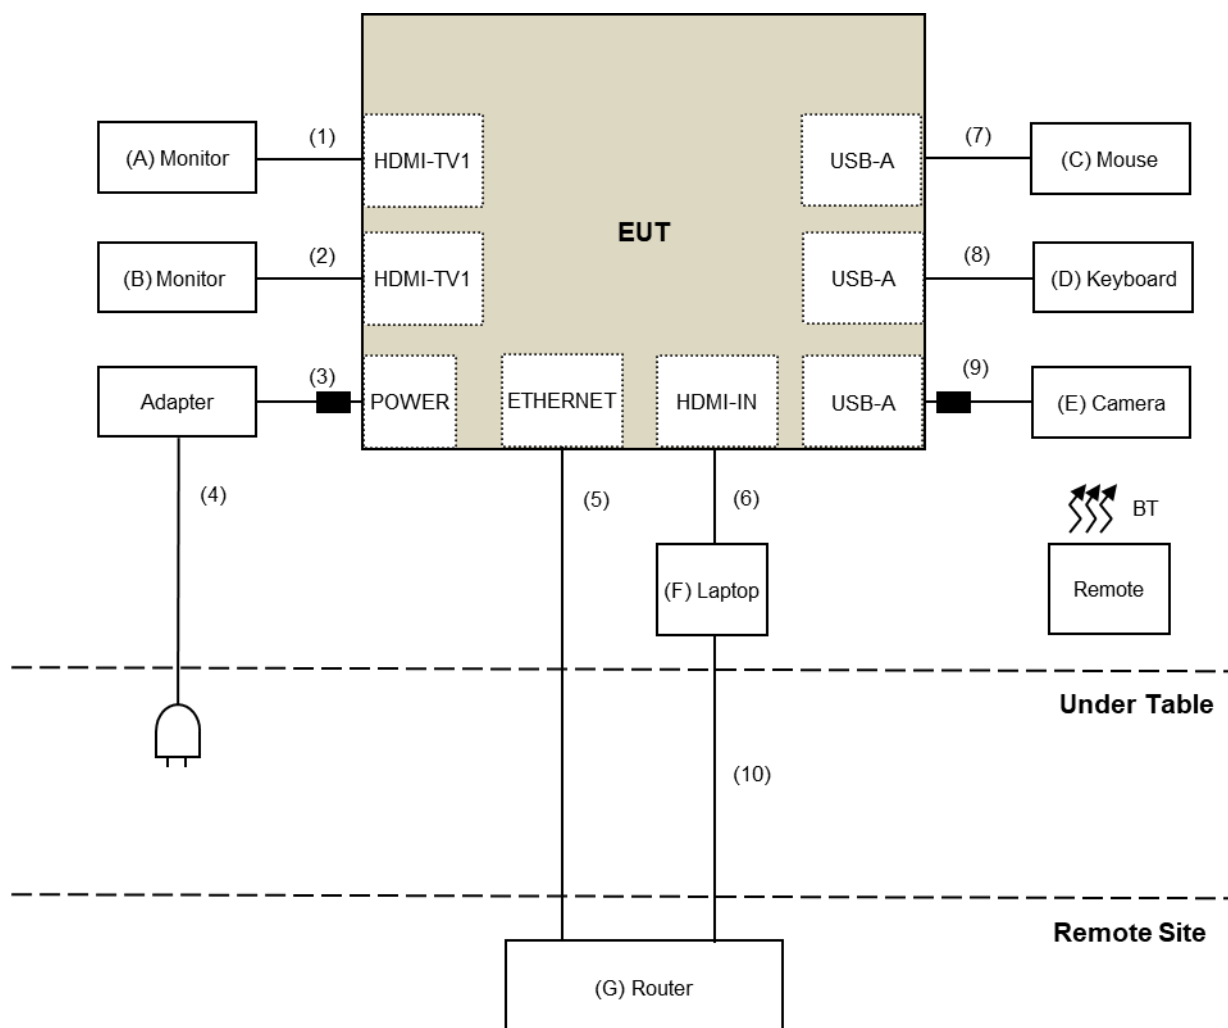

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For Radiated Emission and Bandedge test:

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
MXE EMI Receiver(20 Hz to 44 GHz) Keysight	N9038A	MY54450088	2021/7/6	2022/7/5
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Pre_Amplifier EMCI	EMC001340	980142	2021/5/24	2022/5/23
LOOP ANTENNA Electro-Metrics	EM-6879	264	2021/3/5	2022/3/4
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-001	2021/1/7	2022/1/6
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-002	2021/1/7	2022/1/6
Pre_Amplifier Mini-Circuits	ZFL-1000VH2	QA0838008	2020/10/20	2021/10/19
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	2020/11/5	2021/11/4
RF Coaxial Cable COMMATE/PEWC	8D	966-3-1	2021/3/16	2022/3/15
RF Coaxial Cable COMMATE/PEWC	8D	966-3-2	2021/3/16	2022/3/15
RF Coaxial Cable COMMATE/PEWC	8D	966-3-3	2021/3/16	2022/3/15
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	2020/9/24	2021/9/23
Horn Antenna Schwarzbeck	BBHA9120-D	9120D-406	2020/11/22	2021/11/21
Pre_Amplifier EMCI	EMC12630SE	980384	2021/1/11	2022/1/10
RF Coaxial Cable EMCI	EMC104-SM-SM-1500	180504	2021/4/26	2022/4/25
RF Coaxial Cable EMCI	EMC104-SM-SM-2000	180601	2021/6/8	2022/6/7
RF Coaxial Cable EMCI	EMC104-SM-SM-6000	210201	2021/5/13	2022/5/12
Fix tool for Boresight antenna tower LIOW GUU	FBA-01	FBA_SIP01	NA	NA
Spectrum Analyzer Keysight	N9030A	MY54490679	2021/7/9	2022/7/8
Pre_Amplifier EMCI	EMC184045SE	980387	2021/1/11	2022/1/10
SHF-EHF Horn Schwarzbeck	BBHA 9170	BBHA9170519	2020/11/22	2021/11/21
RF Cable-Frequency range: 1-40GHz EMCI	EMC102-KM-KM-1200	160924	2021/1/11	2022/1/10
RF cable (40GHz) EMCI	EMC-KM-KM-4000	200214	2021/3/10	2022/3/9

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. Tested Date: 2021/7/28 ~2021/8/17

For other test items:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	101516	2021/3/8	2022/3/7
Power meter Anritsu	ML2495A	1529002	2021/6/21	2022/6/20
Power sensor Anritsu	MA2411B	1339443	2021/5/31	2022/5/30
Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	2021/4/13	2022/4/12
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- NOTE:**
1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: 2021/8/6

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

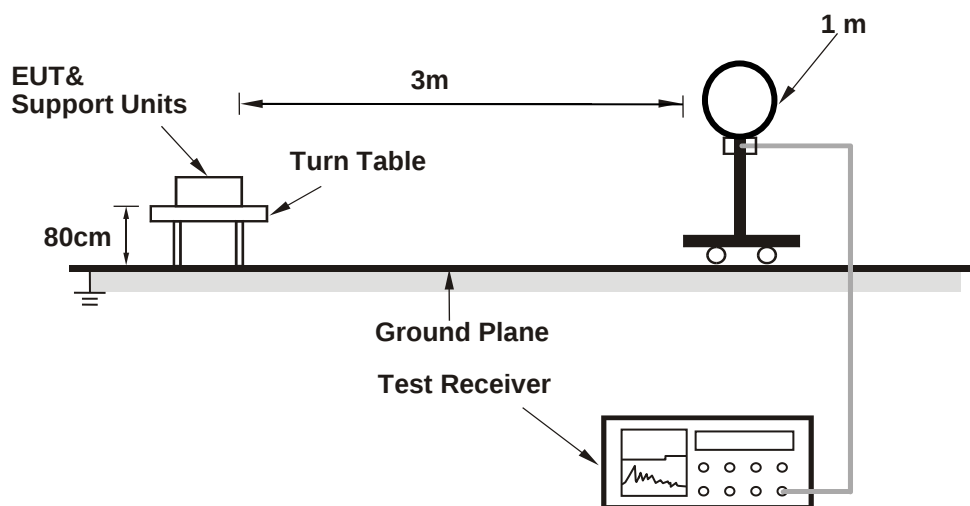

For Radiated emission 30MHz to 1GHz

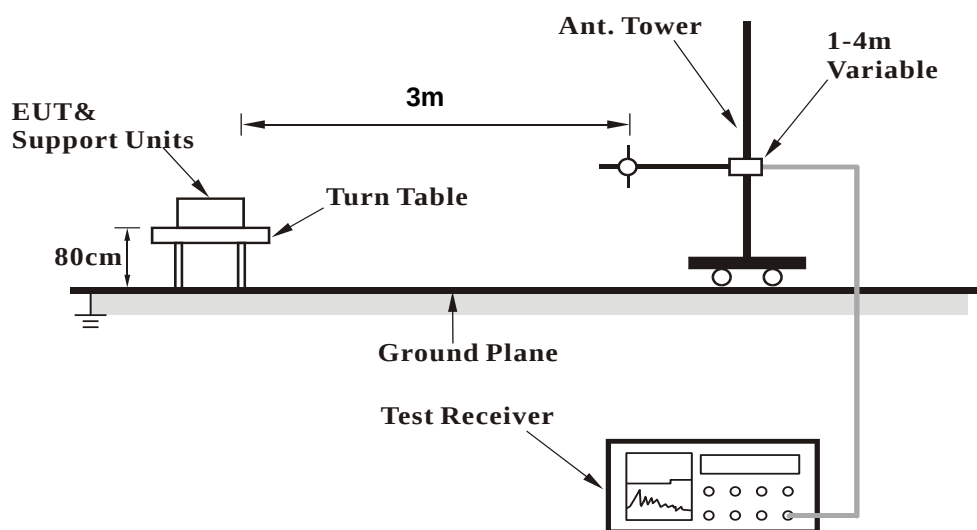

For Radiated emission above 1GHz

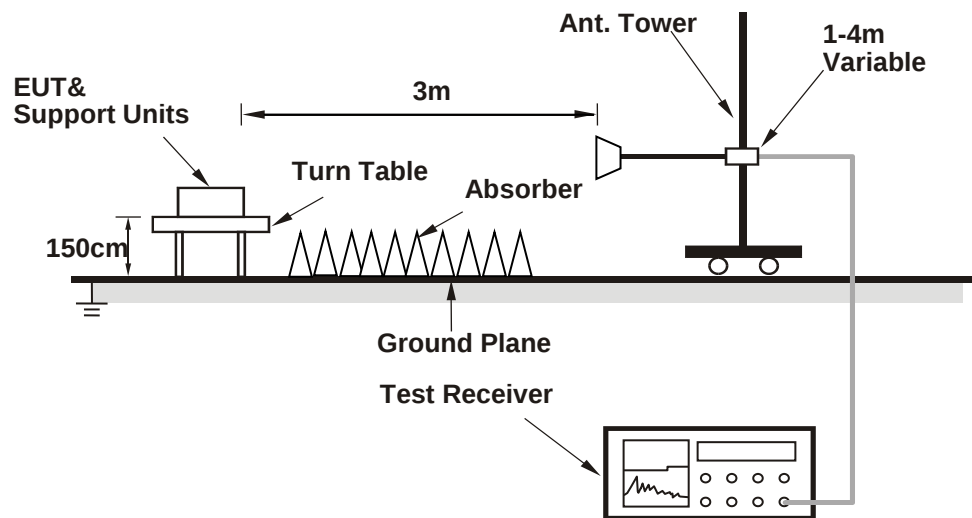

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Controlling software (qdart.win.4.8_installer_00074.101-30-20_06_01_09) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data:

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.9 PK	74.0	-15.1	2.40 H	278	60.1	-1.2
2	2390.00	46.1 AV	54.0	-7.9	2.40 H	278	47.3	-1.2
3	*2412.00	109.4 PK			2.40 H	278	110.6	-1.2
4	*2412.00	106.5 AV			2.40 H	278	107.7	-1.2
5	4824.00	49.5 PK	74.0	-24.5	1.29 H	199	45.8	3.7
6	4824.00	40.1 AV	54.0	-13.9	1.29 H	199	36.4	3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.1 PK	74.0	-15.9	1.51 V	159	59.3	-1.2
2	2390.00	45.8 AV	54.0	-8.2	1.51 V	159	47.0	-1.2
3	*2412.00	105.7 PK			1.51 V	159	106.9	-1.2
4	*2412.00	103.1 AV			1.51 V	159	104.3	-1.2
5	4824.00	54.2 PK	74.0	-19.8	3.09 V	89	50.5	3.7
6	4824.00	49.9 AV	54.0	-4.1	3.09 V	89	46.2	3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.6 PK	74.0	-16.4	2.14 H	284	58.8	-1.2
2	2390.00	45.9 AV	54.0	-8.1	2.14 H	284	47.1	-1.2
3	*2437.00	110.1 PK			2.14 H	284	111.3	-1.2
4	*2437.00	106.5 AV			2.14 H	284	107.7	-1.2
5	2483.50	55.6 PK	74.0	-18.4	2.14 H	284	56.8	-1.2
6	2483.50	44.4 AV	54.0	-9.6	2.14 H	284	45.6	-1.2
7	4874.00	48.8 PK	74.0	-25.2	1.56 H	197	45.0	3.8
8	4874.00	40.5 AV	54.0	-13.5	1.56 H	197	36.7	3.8
9	7311.00	42.7 PK	74.0	-31.3	2.08 H	211	33.0	9.7
10	7311.00	35.2 AV	54.0	-18.8	2.08 H	211	25.5	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.9 PK	74.0	-18.1	1.47 V	168	57.1	-1.2
2	2390.00	44.2 AV	54.0	-9.8	1.47 V	168	45.4	-1.2
3	*2437.00	105.0 PK			1.47 V	168	106.2	-1.2
4	*2437.00	102.4 AV			1.47 V	168	103.6	-1.2
5	2483.50	54.5 PK	74.0	-19.5	1.47 V	168	55.7	-1.2
6	2483.50	43.7 AV	54.0	-10.3	1.47 V	168	44.9	-1.2
7	4874.00	56.6 PK	74.0	-17.4	3.22 V	80	52.8	3.8
8	4874.00	49.9 AV	54.0	-4.1	3.22 V	80	46.1	3.8
9	7311.00	47.8 PK	74.0	-26.2	2.47 V	105	38.1	9.7
10	7311.00	40.1 AV	54.0	-13.9	2.47 V	105	30.4	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.8 PK			2.43 H	291	113.0	-1.2
2	*2462.00	109.3 AV			2.43 H	291	110.5	-1.2
3	2483.50	59.0 PK	74.0	-15.0	2.43 H	291	60.2	-1.2
4	2483.50	47.9 AV	54.0	-6.1	2.43 H	291	49.1	-1.2
5	4924.00	48.7 PK	74.0	-25.3	1.32 H	205	44.8	3.9
6	4924.00	39.2 AV	54.0	-14.8	1.32 H	205	35.3	3.9
7	7386.00	41.9 PK	74.0	-32.1	1.98 H	228	32.2	9.7
8	7386.00	34.8 AV	54.0	-19.2	1.98 H	228	25.1	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.0 PK			1.54 V	153	107.2	-1.2
2	*2462.00	103.5 AV			1.54 V	153	104.7	-1.2
3	2483.50	59.1 PK	74.0	-14.9	1.54 V	153	60.3	-1.2
4	2483.50	47.7 AV	54.0	-6.3	1.54 V	153	48.9	-1.2
5	4924.00	53.0 PK	74.0	-21.0	3.13 V	83	49.1	3.9
6	4924.00	49.2 AV	54.0	-4.8	3.13 V	83	45.3	3.9
7	7386.00	46.8 PK	74.0	-27.2	2.51 V	111	37.1	9.7
8	7386.00	39.4 AV	54.0	-14.6	2.51 V	111	29.7	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.4 PK	74.0	-11.6	2.40 H	282	63.6	-1.2
2	2390.00	49.9 AV	54.0	-4.1	2.40 H	282	51.1	-1.2
3	*2412.00	112.0 PK			2.40 H	282	113.2	-1.2
4	*2412.00	102.6 AV			2.40 H	282	103.8	-1.2
5	4824.00	47.9 PK	74.0	-26.1	1.33 H	205	44.2	3.7
6	4824.00	36.0 AV	54.0	-18.0	1.33 H	205	32.3	3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.3 PK	74.0	-10.7	3.07 V	77	64.5	-1.2
2	2390.00	49.7 AV	54.0	-4.3	3.07 V	77	50.9	-1.2
3	*2412.00	111.8 PK			3.07 V	77	113.0	-1.2
4	*2412.00	102.5 AV			3.07 V	77	103.7	-1.2
5	4824.00	49.6 PK	74.0	-24.4	3.11 V	92	45.9	3.7
6	4824.00	38.4 AV	54.0	-15.6	3.11 V	92	34.7	3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.4 PK	74.0	-11.6	2.12 H	280	63.6	-1.2
2	2390.00	46.8 AV	54.0	-7.2	2.12 H	280	48.0	-1.2
3	*2437.00	114.2 PK			2.12 H	280	115.4	-1.2
4	*2437.00	104.7 AV			2.12 H	280	105.9	-1.2
5	2483.50	59.4 PK	74.0	-14.6	2.12 H	280	60.6	-1.2
6	2483.50	49.2 AV	54.0	-4.8	2.12 H	280	50.4	-1.2
7	4874.00	48.1 PK	74.0	-25.9	1.36 H	202	44.3	3.8
8	4874.00	38.0 AV	54.0	-16.0	1.36 H	202	34.2	3.8
9	7311.00	41.9 PK	74.0	-32.1	2.05 H	208	32.2	9.7
10	7311.00	32.8 AV	54.0	-21.2	2.05 H	208	23.1	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.5 PK	74.0	-12.5	3.04 V	84	62.7	-1.2
2	2390.00	45.1 AV	54.0	-8.9	3.04 V	84	46.3	-1.2
3	*2437.00	114.0 PK			3.04 V	84	115.2	-1.2
4	*2437.00	104.5 AV			3.04 V	84	105.7	-1.2
5	2483.50	58.5 PK	74.0	-15.5	3.04 V	84	59.7	-1.2
6	2483.50	47.9 AV	54.0	-6.1	3.04 V	84	49.1	-1.2
7	4874.00	53.6 PK	74.0	-20.4	3.05 V	94	49.8	3.8
8	4874.00	40.3 AV	54.0	-13.7	3.05 V	94	36.5	3.8
9	7311.00	45.1 PK	74.0	-28.9	2.56 V	101	35.4	9.7
10	7311.00	34.8 AV	54.0	-19.2	2.56 V	101	25.1	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.6 PK			2.33 H	278	112.8	-1.2
2	*2462.00	102.5 AV			2.33 H	278	103.7	-1.2
3	2483.50	62.7 PK	74.0	-11.3	2.33 H	278	63.9	-1.2
4	2483.50	49.9 AV	54.0	-4.1	2.33 H	278	51.1	-1.2
5	4924.00	47.5 PK	74.0	-26.5	1.36 H	211	43.6	3.9
6	4924.00	35.6 AV	54.0	-18.4	1.36 H	211	31.7	3.9
7	7386.00	40.7 PK	74.0	-33.3	2.17 H	215	31.0	9.7
8	7386.00	32.1 AV	54.0	-21.9	2.17 H	215	22.4	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.8 PK			3.21 V	92	111.0	-1.2
2	*2462.00	100.3 AV			3.21 V	92	101.5	-1.2
3	2483.50	60.0 PK	74.0	-14.0	3.21 V	92	61.2	-1.2
4	2483.50	48.7 AV	54.0	-5.3	3.21 V	92	49.9	-1.2
5	4924.00	49.2 PK	74.0	-24.8	3.02 V	92	45.3	3.9
6	4924.00	37.7 AV	54.0	-16.3	3.02 V	92	33.8	3.9
7	7386.00	44.8 PK	74.0	-29.2	2.61 V	98	35.1	9.7
8	7386.00	33.1 AV	54.0	-20.9	2.61 V	98	23.4	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.2 PK	74.0	-11.8	1.80 H	286	63.4	-1.2
2	2390.00	49.6 AV	54.0	-4.4	1.80 H	286	50.8	-1.2
3	*2412.00	110.5 PK			1.80 H	286	111.7	-1.2
4	*2412.00	100.9 AV			1.80 H	286	102.1	-1.2
5	4824.00	47.7 PK	74.0	-26.3	1.39 H	208	44.0	3.7
6	4824.00	36.1 AV	54.0	-17.9	1.39 H	208	32.4	3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.1 PK	74.0	-11.9	3.14 V	77	63.3	-1.2
2	2390.00	49.0 AV	54.0	-5.0	3.14 V	77	50.2	-1.2
3	*2412.00	110.0 PK			3.14 V	77	111.2	-1.2
4	*2412.00	100.3 AV			3.14 V	77	101.5	-1.2
5	4824.00	49.6 PK	74.0	-24.4	3.02 V	93	45.9	3.7
6	4824.00	37.7 AV	54.0	-16.3	3.02 V	93	34.0	3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.4 PK	74.0	-12.6	2.12 H	287	62.6	-1.2
2	2390.00	47.5 AV	54.0	-6.5	2.12 H	287	48.7	-1.2
3	*2437.00	114.9 PK			2.12 H	287	116.1	-1.2
4	*2437.00	104.5 AV			2.12 H	287	105.7	-1.2
5	2483.50	59.6 PK	74.0	-14.4	2.12 H	287	60.8	-1.2
6	2483.50	49.1 AV	54.0	-4.9	2.12 H	287	50.3	-1.2
7	4874.00	49.0 PK	74.0	-25.0	1.38 H	208	45.2	3.8
8	4874.00	37.4 AV	54.0	-16.6	1.38 H	208	33.6	3.8
9	7311.00	41.2 PK	74.0	-32.8	2.17 H	233	31.5	9.7
10	7311.00	32.5 AV	54.0	-21.5	2.17 H	233	22.8	9.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.5 PK	74.0	-12.5	3.00 V	75	62.7	-1.2
2	2390.00	47.4 AV	54.0	-6.6	3.00 V	75	48.6	-1.2
3	*2437.00	114.6 PK			3.00 V	75	115.8	-1.2
4	*2437.00	104.4 AV			3.00 V	75	105.6	-1.2
5	2483.50	58.7 PK	74.0	-15.3	3.00 V	75	59.9	-1.2
6	2483.50	48.2 AV	54.0	-5.8	3.00 V	75	49.4	-1.2
7	4874.00	53.8 PK	74.0	-20.2	3.06 V	91	50.0	3.8
8	4874.00	40.1 AV	54.0	-13.9	3.06 V	91	36.3	3.8
9	7311.00	44.9 PK	74.0	-29.1	2.47 V	116	35.2	9.7
10	7311.00	34.5 AV	54.0	-19.5	2.47 V	116	24.8	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.3 PK			2.32 H	278	111.5	-1.2
2	*2462.00	100.4 AV			2.32 H	278	101.6	-1.2
3	2483.50	60.2 PK	74.0	-13.8	2.32 H	278	61.4	-1.2
4	2483.50	49.8 AV	54.0	-4.2	2.32 H	278	51.0	-1.2
5	4924.00	47.5 PK	74.0	-26.5	1.38 H	207	43.6	3.9
6	4924.00	35.7 AV	54.0	-18.3	1.38 H	207	31.8	3.9
7	7386.00	40.9 PK	74.0	-33.1	2.06 H	201	31.2	9.7
8	7386.00	32.3 AV	54.0	-21.7	2.06 H	201	22.6	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.0 PK			2.94 V	86	111.2	-1.2
2	*2462.00	100.3 AV			2.94 V	86	101.5	-1.2
3	2483.50	62.2 PK	74.0	-11.8	2.94 V	86	63.4	-1.2
4	2483.50	49.7 AV	54.0	-4.3	2.94 V	86	50.9	-1.2
5	4924.00	48.9 PK	74.0	-25.1	3.26 V	93	45.0	3.9
6	4924.00	37.9 AV	54.0	-16.1	3.26 V	93	34.0	3.9
7	7386.00	44.9 PK	74.0	-29.1	2.57 V	107	35.2	9.7
8	7386.00	33.2 AV	54.0	-20.8	2.57 V	107	23.5	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.


Below 1GHz Data:

RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	104.16	34.9 QP	43.5	-8.6	3.00 H	93	46.4	-11.5
2	127.58	37.1 QP	43.5	-6.4	1.00 H	53	46.2	-9.1
3	284.92	32.3 QP	46.0	-13.7	1.00 H	93	39.4	-7.1
4	328.35	33.7 QP	46.0	-12.3	1.00 H	309	39.2	-5.5
5	408.03	38.3 QP	46.0	-7.7	1.00 H	14	41.8	-3.5
6	500.01	34.9 QP	46.0	-11.1	1.50 H	53	35.9	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

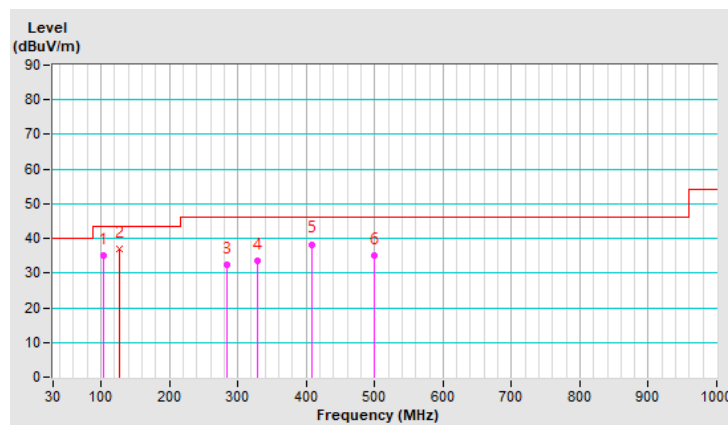


RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.02	34.6 QP	40.0	-5.4	1.00 V	306	43.9	-9.3
2	103.89	35.5 QP	43.5	-8.0	1.00 V	26	47.1	-11.6
3	124.55	37.3 QP	43.5	-6.2	1.00 V	38	46.7	-9.4
4	384.05	35.5 QP	46.0	-10.5	1.50 V	231	39.8	-4.3
5	500.01	37.4 QP	46.0	-8.6	1.50 V	2	38.4	-1.0
6	846.74	35.1 QP	46.0	-10.9	3.00 V	205	29.3	5.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

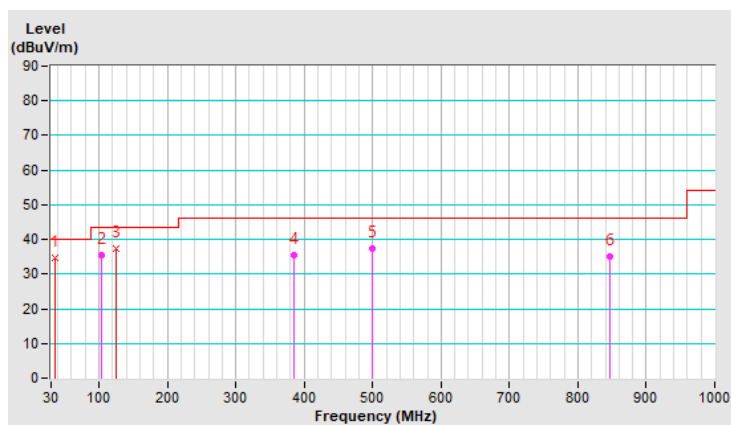

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	2020/10/20	2021/10/19
LISN R&S	ESH3-Z5	848773/004	2020/10/27	2021/10/26
LISN R & S	ESH3-Z5	835239/001	2021/3/26	2022/3/25
50 ohms Terminator	50	3	2020/10/26	2021/10/25
RF Coaxial Cable JYEBO	5D-FB	COCCAB-001	2020/9/26	2021/9/25
Fixed attenuator STI	STI02-2200-10	005	2020/8/29	2021/8/28
Software BVADT	BVADT_Cond_V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: 2021/8/9

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

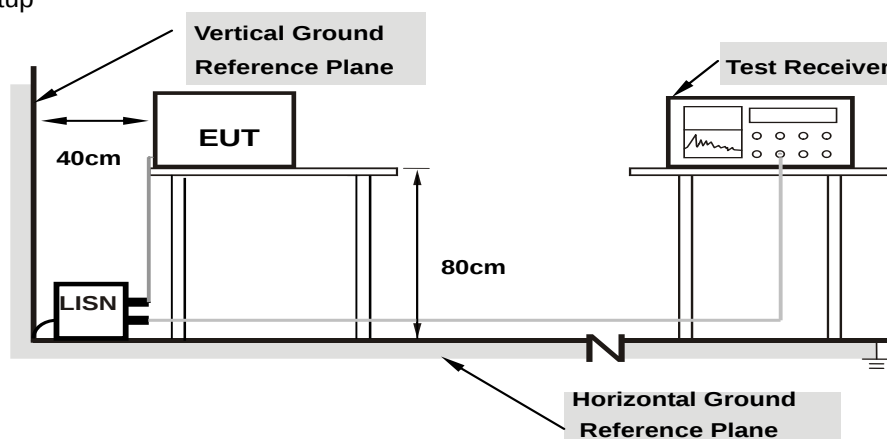

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.95	24.86	16.83	34.81	26.78	66.00	56.00	-31.19	-29.22
2	0.16953	9.96	17.83	9.75	27.79	19.71	64.98	54.98	-37.19	-35.27
3	0.20859	9.97	11.49	1.29	21.46	11.26	63.26	53.26	-41.80	-42.00
4	0.40391	9.99	18.59	10.55	28.58	20.54	57.77	47.77	-29.19	-27.23
5	2.86719	10.11	10.47	-1.39	20.58	8.72	56.00	46.00	-35.42	-37.28
6	22.55859	11.18	15.60	14.43	26.78	25.61	60.00	50.00	-33.22	-24.39

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

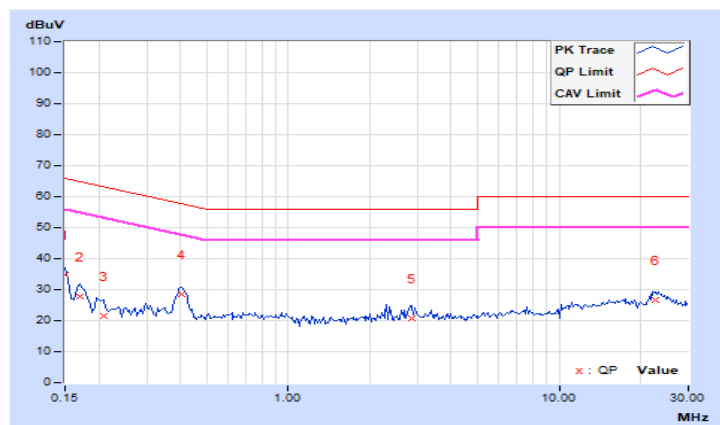


RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.92	21.98	14.57	31.90	24.49	66.00	56.00	-34.10	-31.51
2	0.17734	9.94	14.12	8.72	24.06	18.66	64.61	54.61	-40.55	-35.95
3	0.40000	9.96	16.80	8.57	26.76	18.53	57.85	47.85	-31.09	-29.32
4	2.76563	10.07	12.72	0.23	22.79	10.30	56.00	46.00	-33.21	-35.70
5	16.09375	10.68	11.41	6.44	22.09	17.12	60.00	50.00	-37.91	-32.88
6	23.13672	10.88	17.49	14.82	28.37	25.70	60.00	50.00	-31.63	-24.30

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

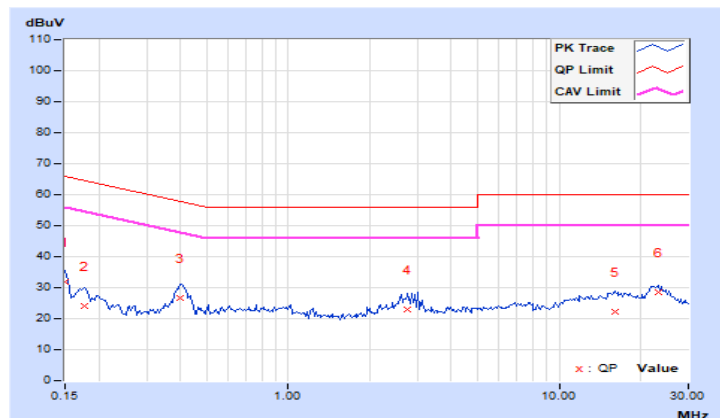


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	8.62	8.14	0.5	Pass
6	2437	8.16	8.15	0.5	Pass
11	2462	8.14	8.15	0.5	Pass

802.11g


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.36	15.25	0.5	Pass
6	2437	15.98	15.55	0.5	Pass
11	2462	15.19	15.4	0.5	Pass

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.81	15.36	0.5	Pass
6	2437	16.95	16.95	0.5	Pass
11	2462	15.19	15.51	0.5	Pass

Spectrum Plot of Worst Value


802.11b_Chain 0 / CH11

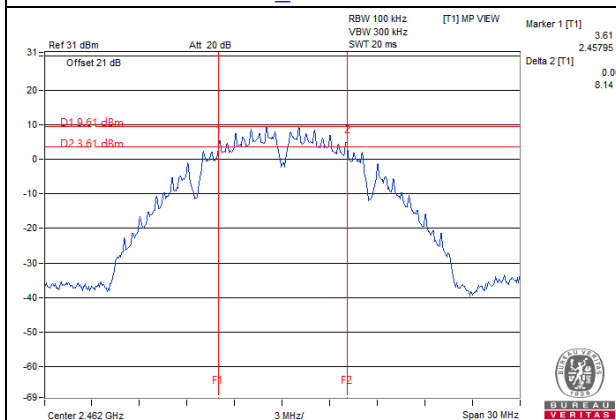

802.11g_Chain 0 / CH11

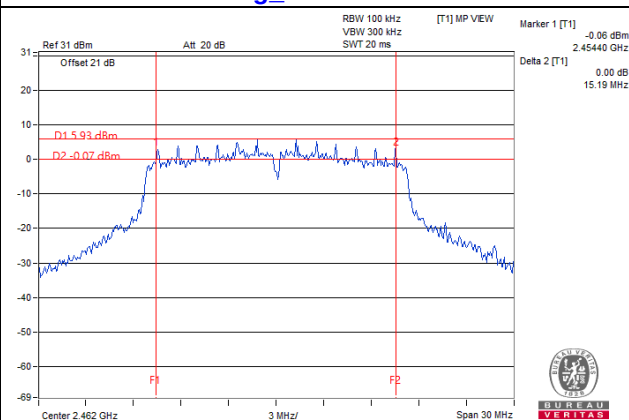

802.11n (HT20)_Chain 0 / CH11

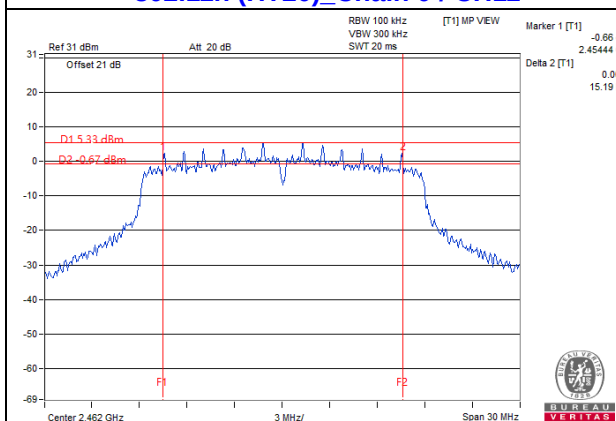


4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

FOR PEAK POWER

802.11b

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.67	20.42	226.835	23.56	30	Pass
6	2437	20.79	21.27	253.918	24.05	30	Pass
11	2462	20.75	20.74	237.427	23.76	30	Pass

Note: The maximum gain is 3.89 dBi < 6dBi, so the output power limit shall not be reduced.

802.11g

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.48	20.01	211.917	23.26	30	Pass
6	2437	23.35	23.19	424.721	26.28	30	Pass
11	2462	20.52	20.37	221.613	23.46	30	Pass

Note: The maximum gain is 3.89 dBi < 6dBi, so the output power limit shall not be reduced.

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.48	19.31	174.026	22.41	30	Pass
6	2437	23.33	23.24	426.141	26.30	30	Pass
11	2462	19.41	19.45	175.402	22.44	30	Pass

Note: The maximum gain is 3.89 dBi < 6dBi, so the output power limit shall not be reduced.

FOR AVERAGE POWER

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
1	2412	18.23	18.02	129.914	21.14
6	2437	19.01	19.23	163.369	22.13
11	2462	18.75	18.79	150.673	21.78

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
1	2412	16.17	15.77	79.157	18.98
6	2437	20.37	20.14	212.169	23.27
11	2462	16.08	15.69	77.619	18.90

802.11n (HT20)


Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
1	2412	15.31	15.08	66.173	18.21
6	2437	20.45	20.17	214.909	23.32
11	2462	15.11	15.23	65.777	18.18

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1			
1	2412	-7.45	-8.69	-5.02	7.95	Pass
6	2437	-9.10	-6.73	-4.74	7.95	Pass
11	2462	-7.56	-7.90	-4.72	7.95	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 6.05\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(6.05-6) = 7.95\text{dBm}$.

802.11g

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1			
1	2412	-10.88	-10.56	-7.71	7.95	Pass
6	2437	-7.01	-7.87	-4.41	7.95	Pass
11	2462	-11.28	-10.74	-7.99	7.95	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 6.05\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(6.05-6) = 7.95\text{dBm}$.


802.11n (HT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1			
1	2412	-12.54	-11.91	-9.20	7.95	Pass
6	2437	-7.21	-5.52	-3.27	7.95	Pass
11	2462	-11.88	-11.62	-8.74	7.95	Pass


- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 6.05\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(6.05-6) = 7.95\text{dBm}$.

Spectrum Plot of Worst Value


802.11b Chain 1 / CH6

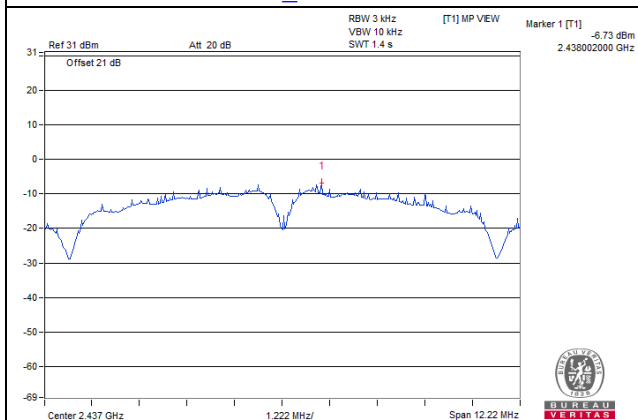

802.11g Chain 0 / CH6

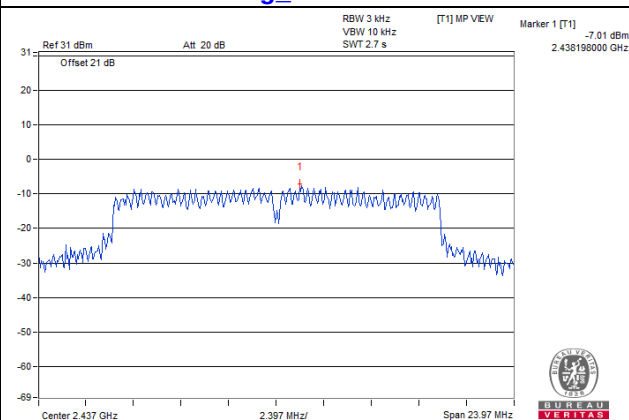

802.11n (HT20) Chain 1 / CH6

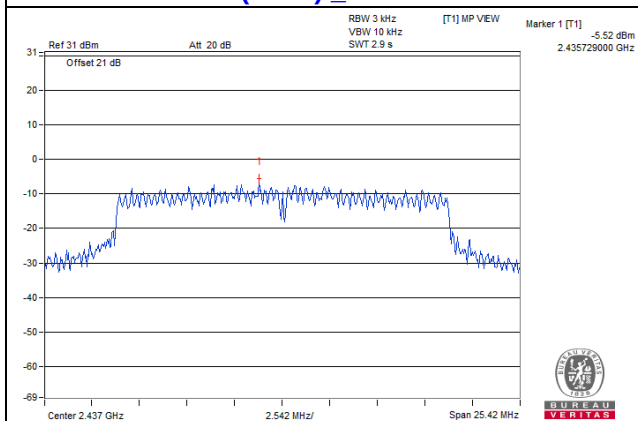


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition


Same as Item 4.3.6

4.6.7 Test Results


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b Chain 0


CH 1

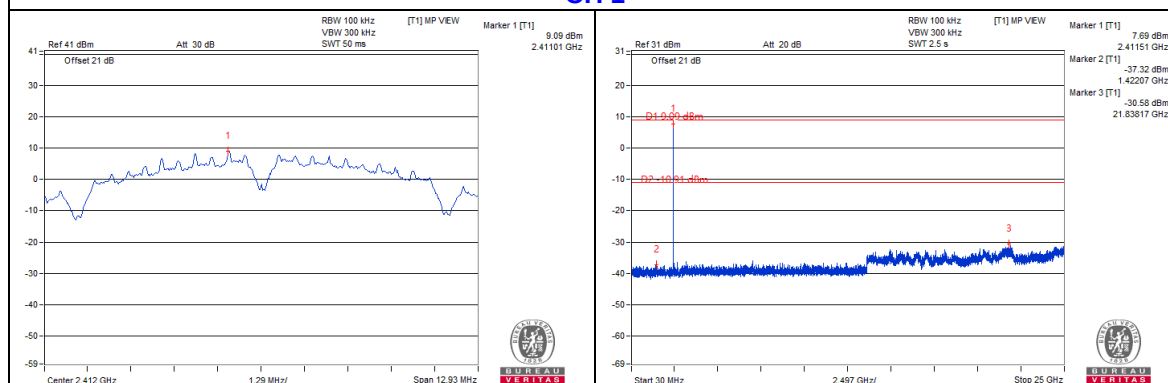


CH 6

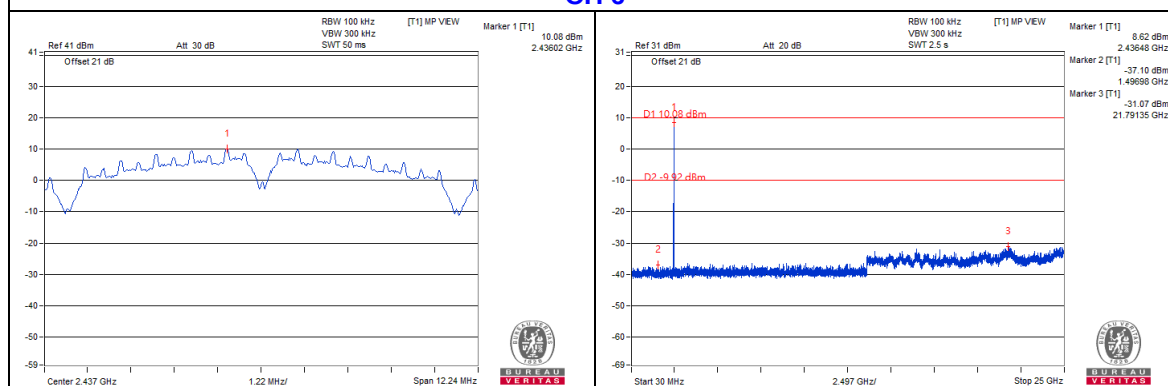


CH 11

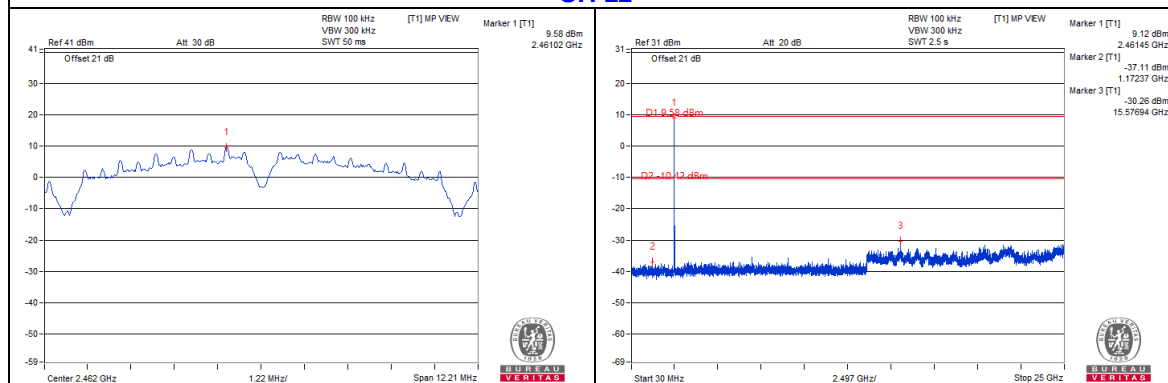

CH 1 Band edge

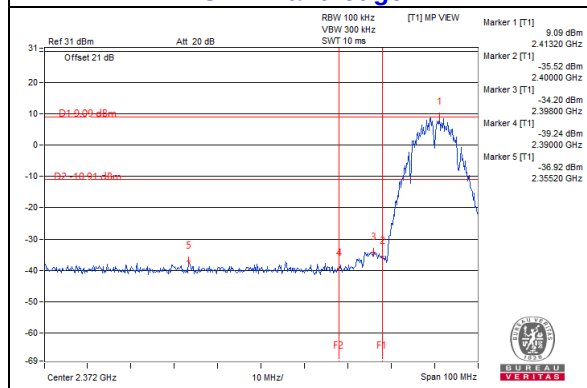


CH 11 Band edge

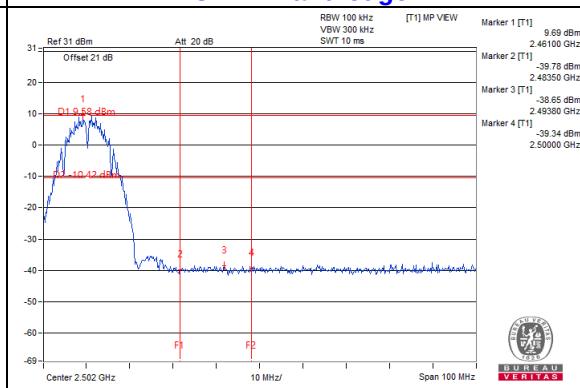


Chain 1


CH 1

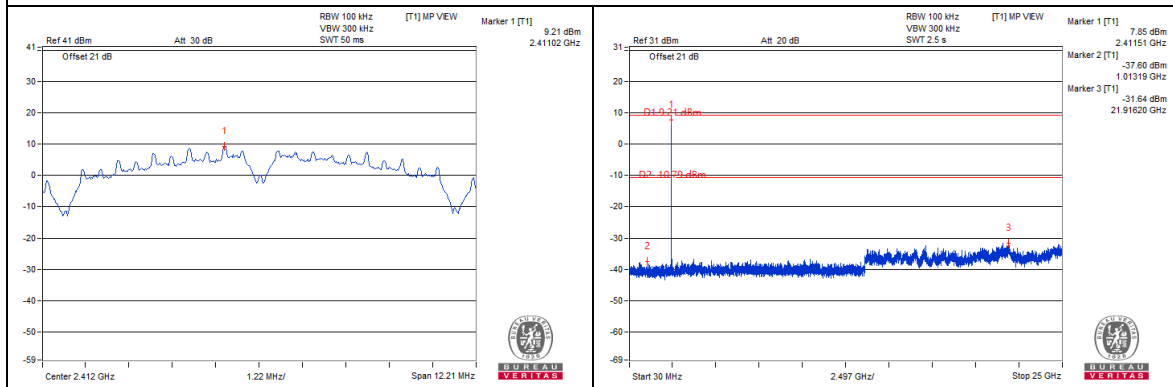


CH 6

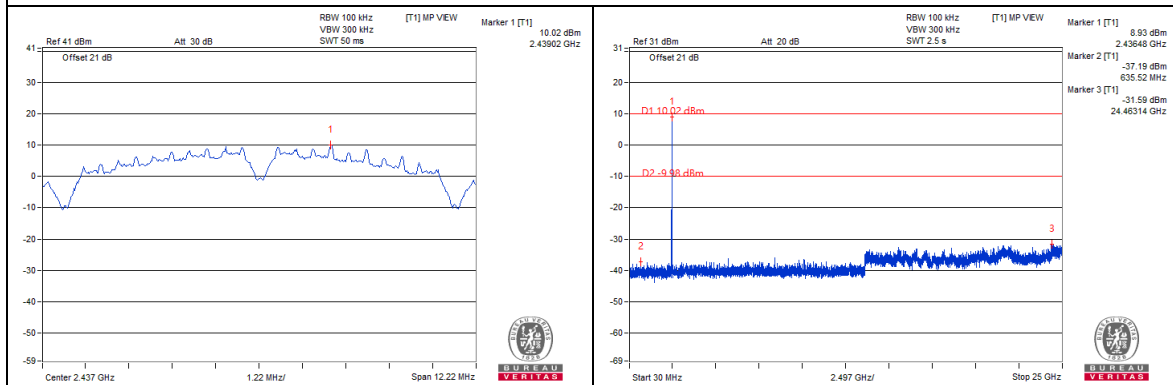


CH 11

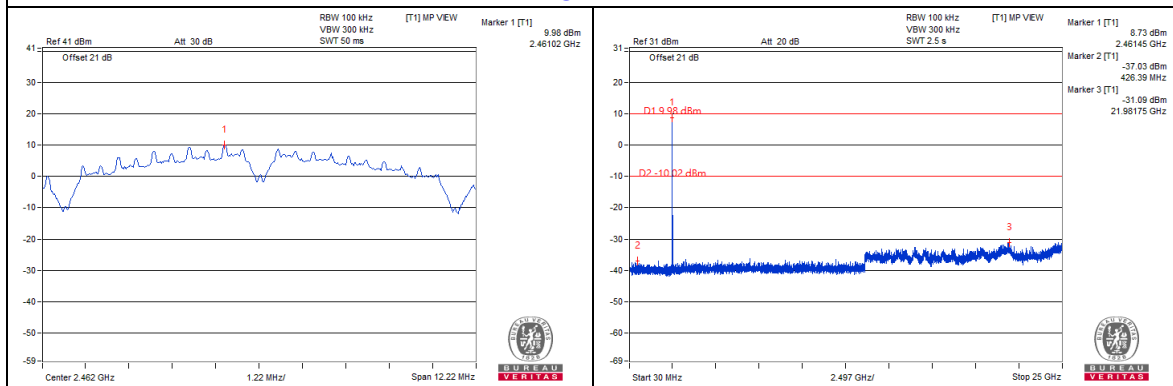

CH 1 Band edge

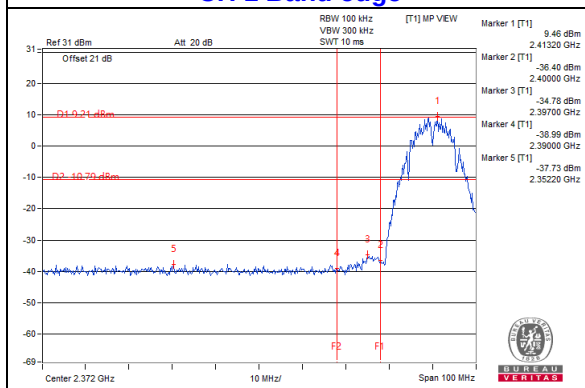


CH 11 Band edge

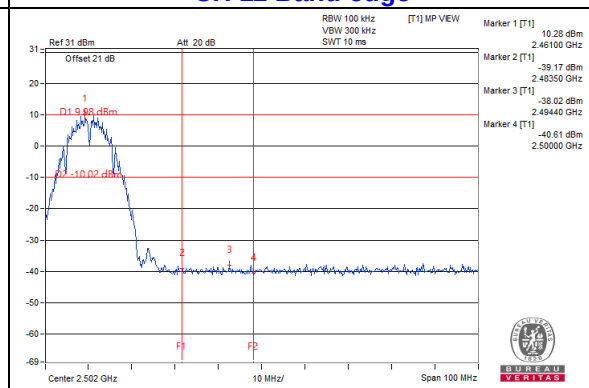


802.11g Chain 0


CH 1

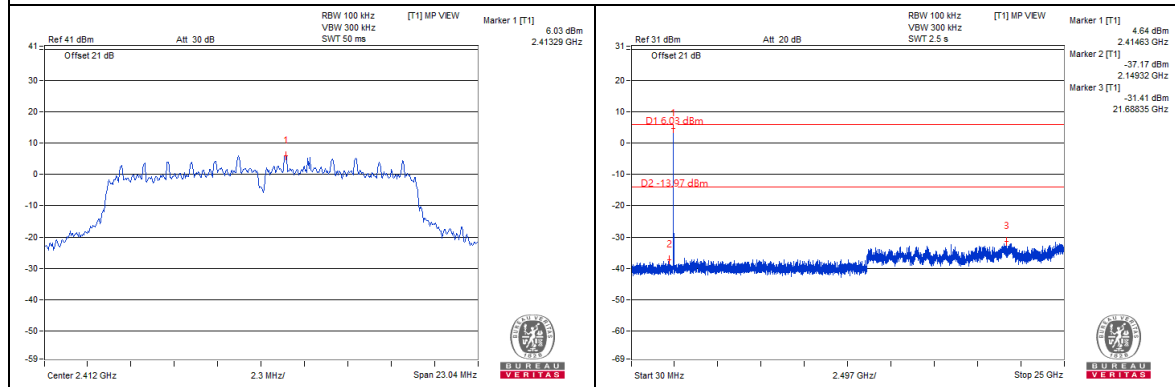


CH 6

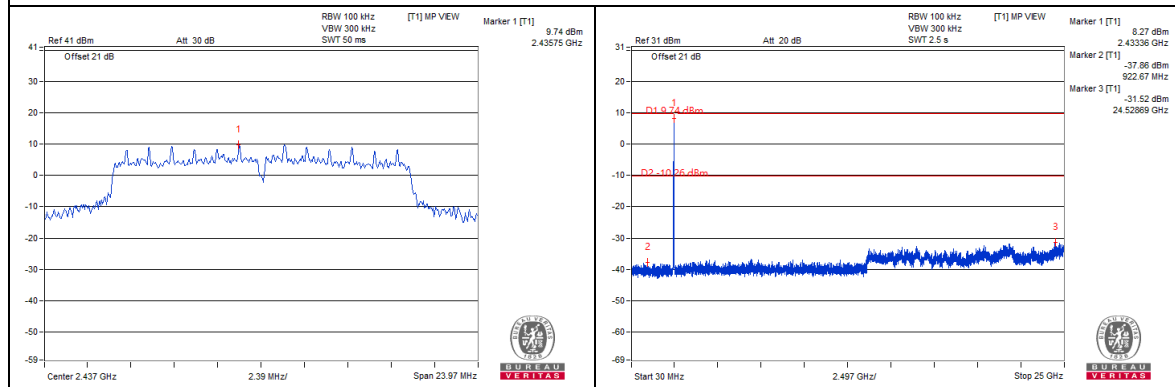


CH 11

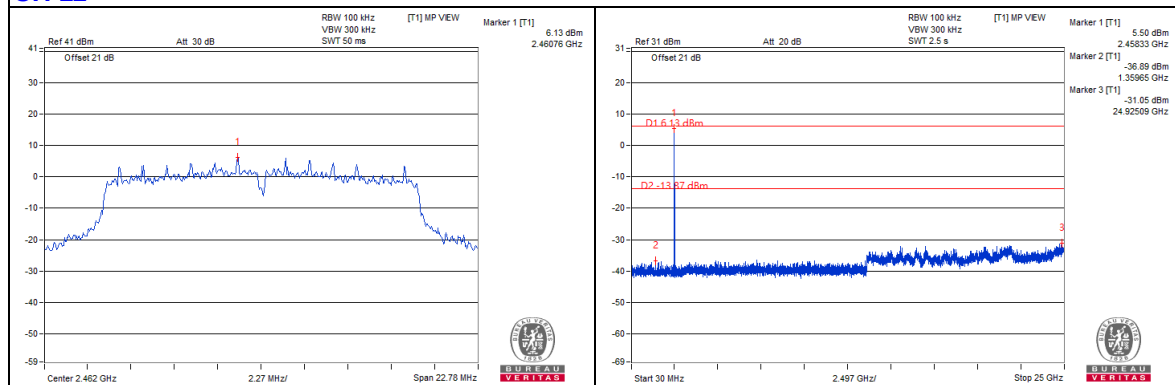

CH 1 Band edge

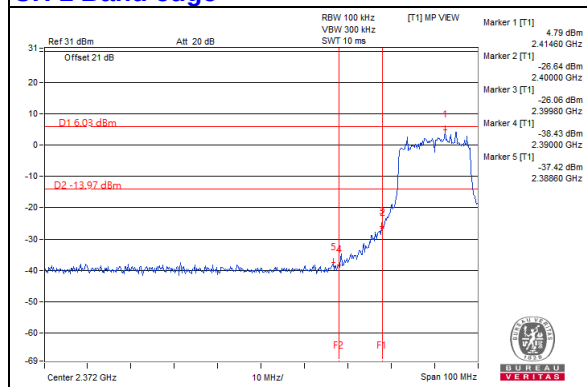


CH 11 Band edge

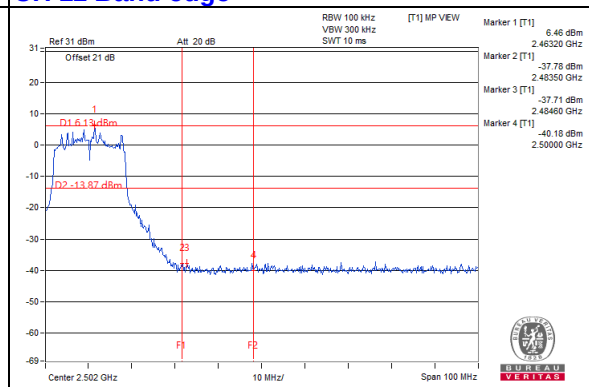


Chain 1


CH 1

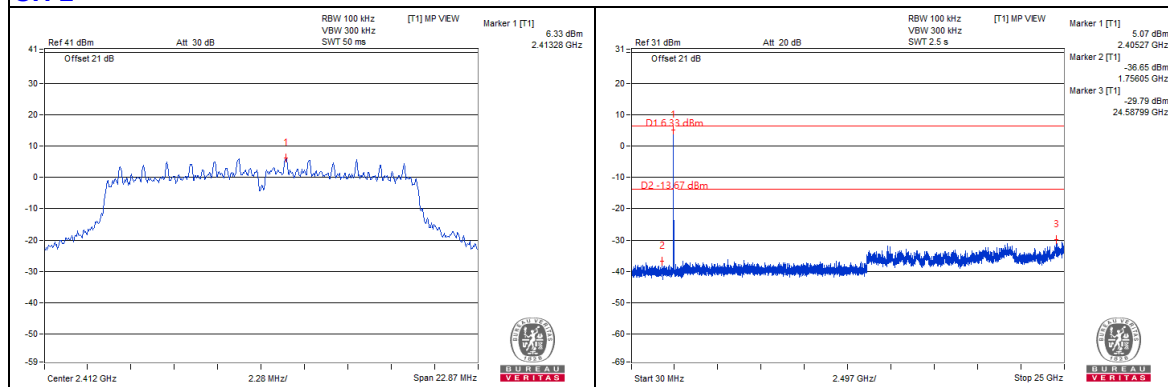


CH 6

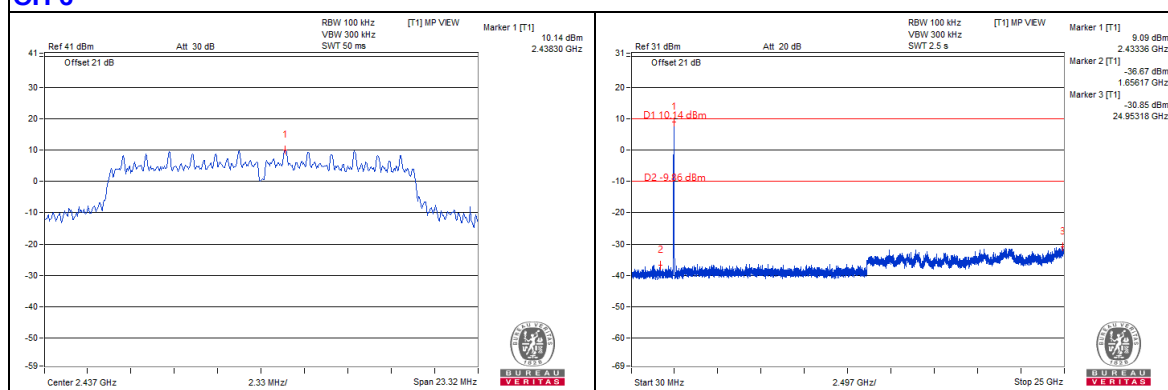


CH 11

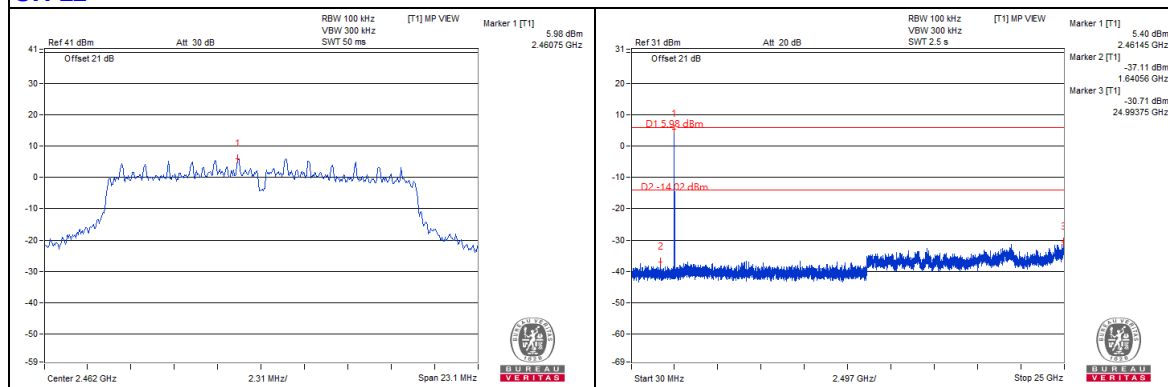

CH 1 Band edge

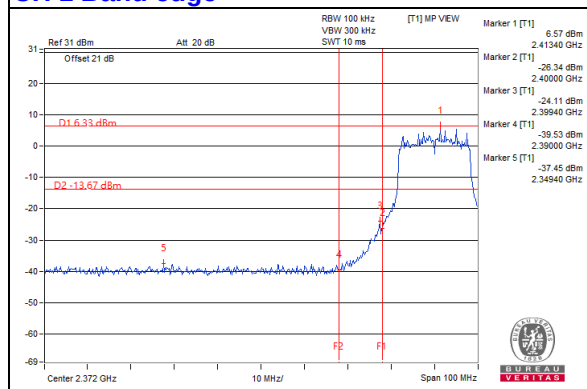


CH 11 Band edge

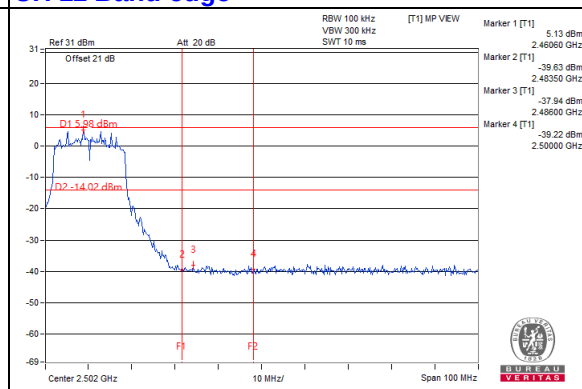


802.11n (HT20)

Chain 0


CH 1

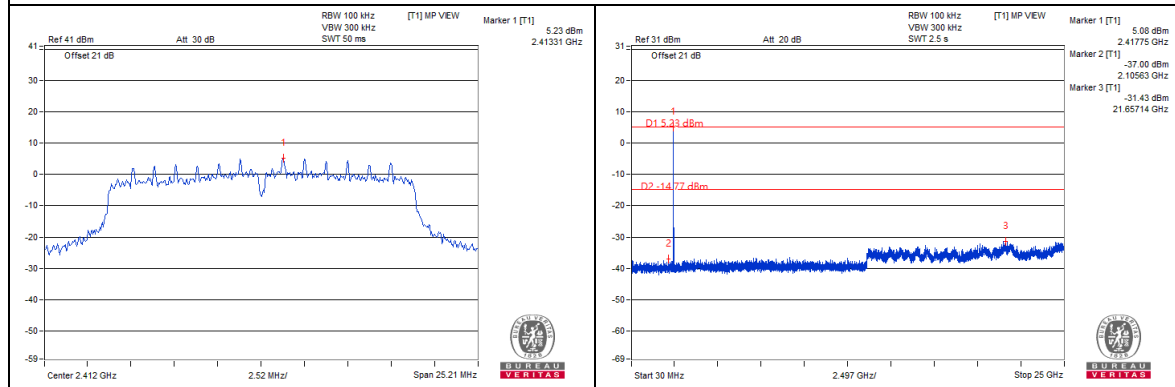


CH 6

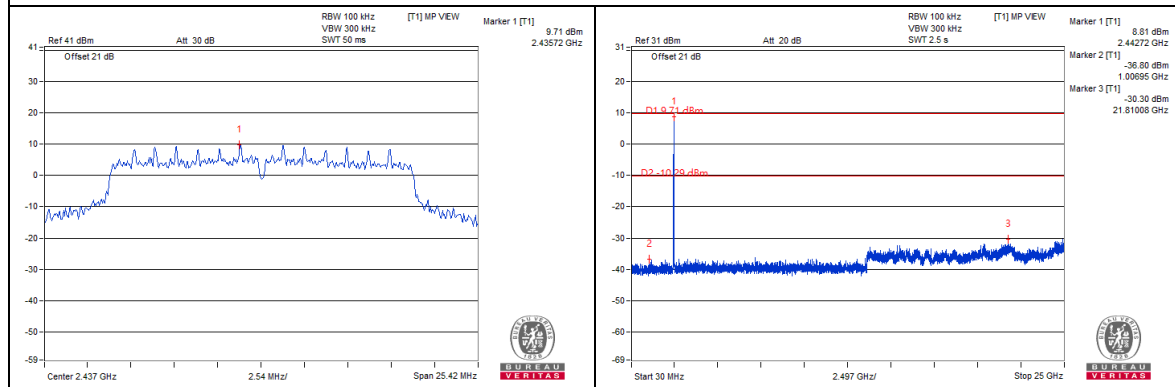


CH 11

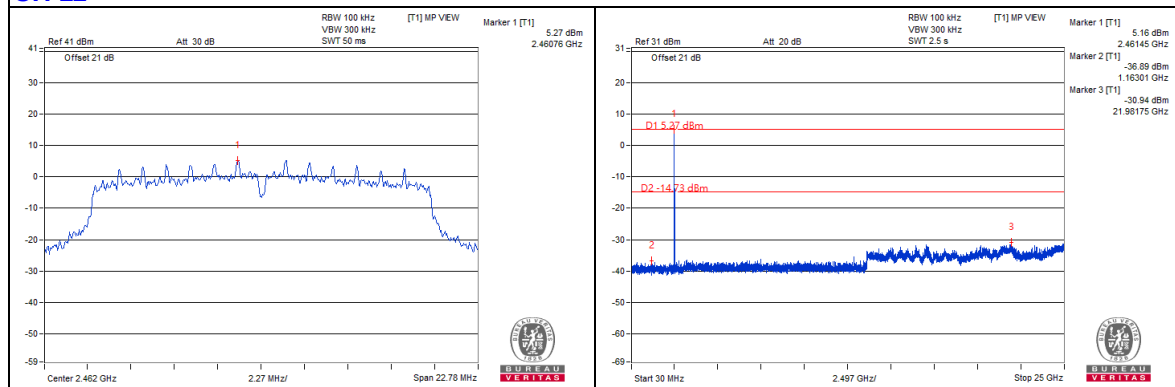

CH 1 Band edge

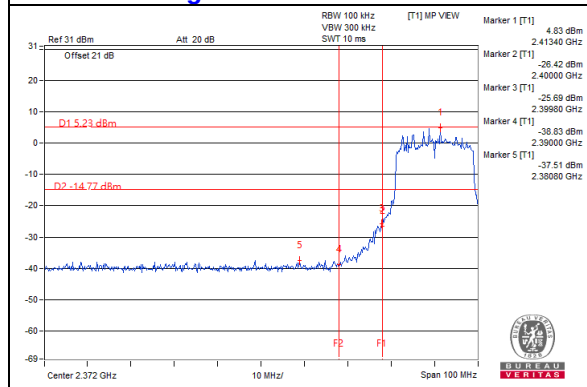


CH 11 Band edge

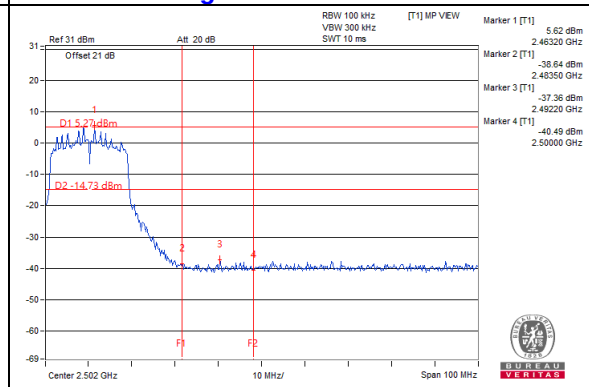


Chain 1


CH 1

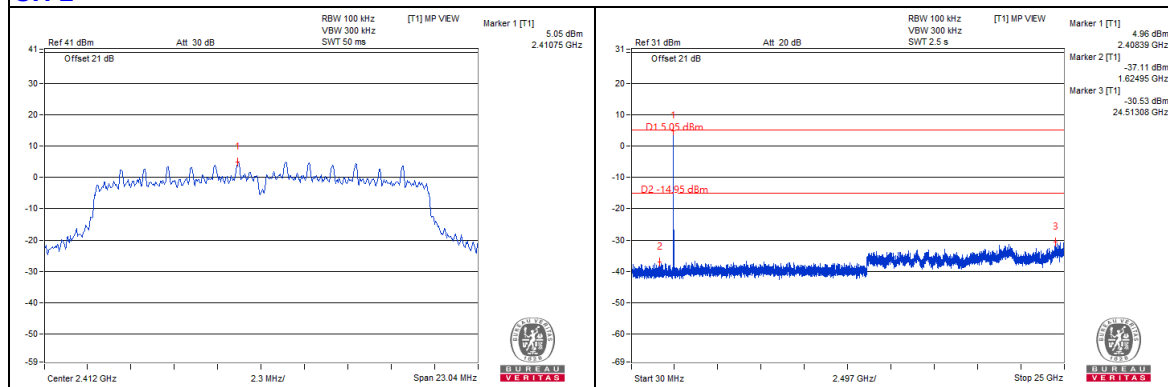


CH 6

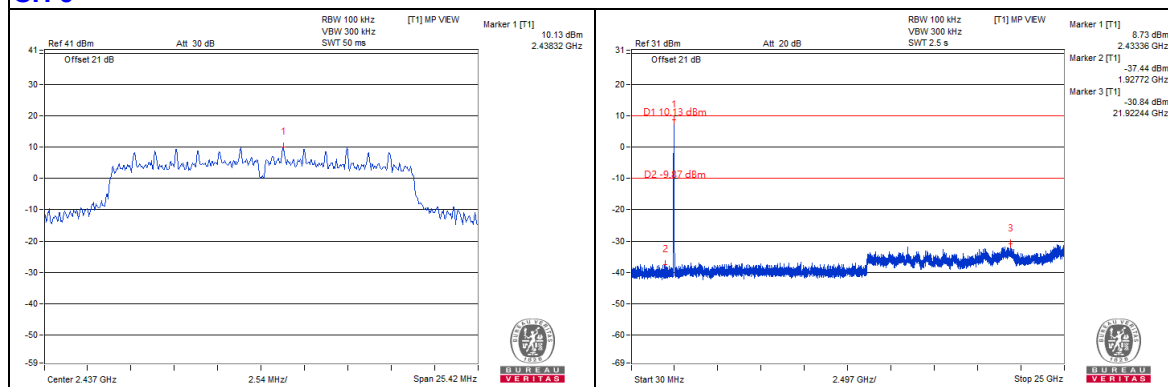


CH 11

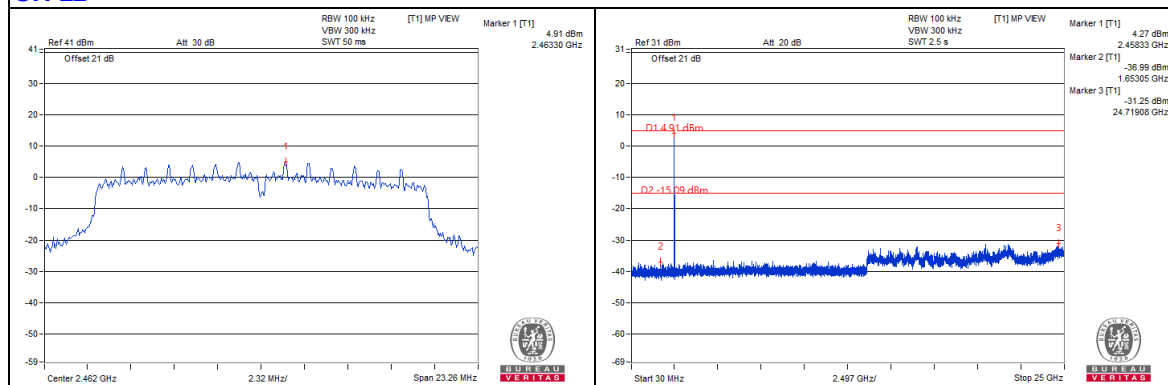

CH 1 Band edge

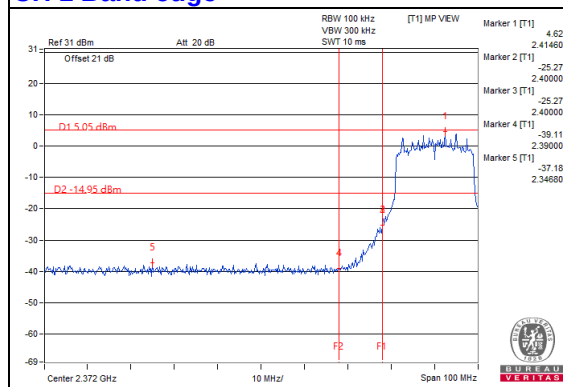


CH 11 Band edge

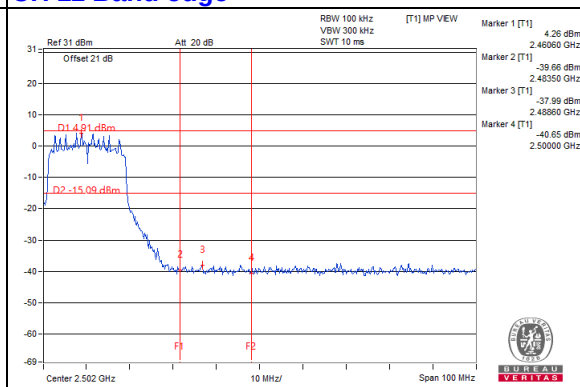



5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Annex A - Band-Edge Measurement

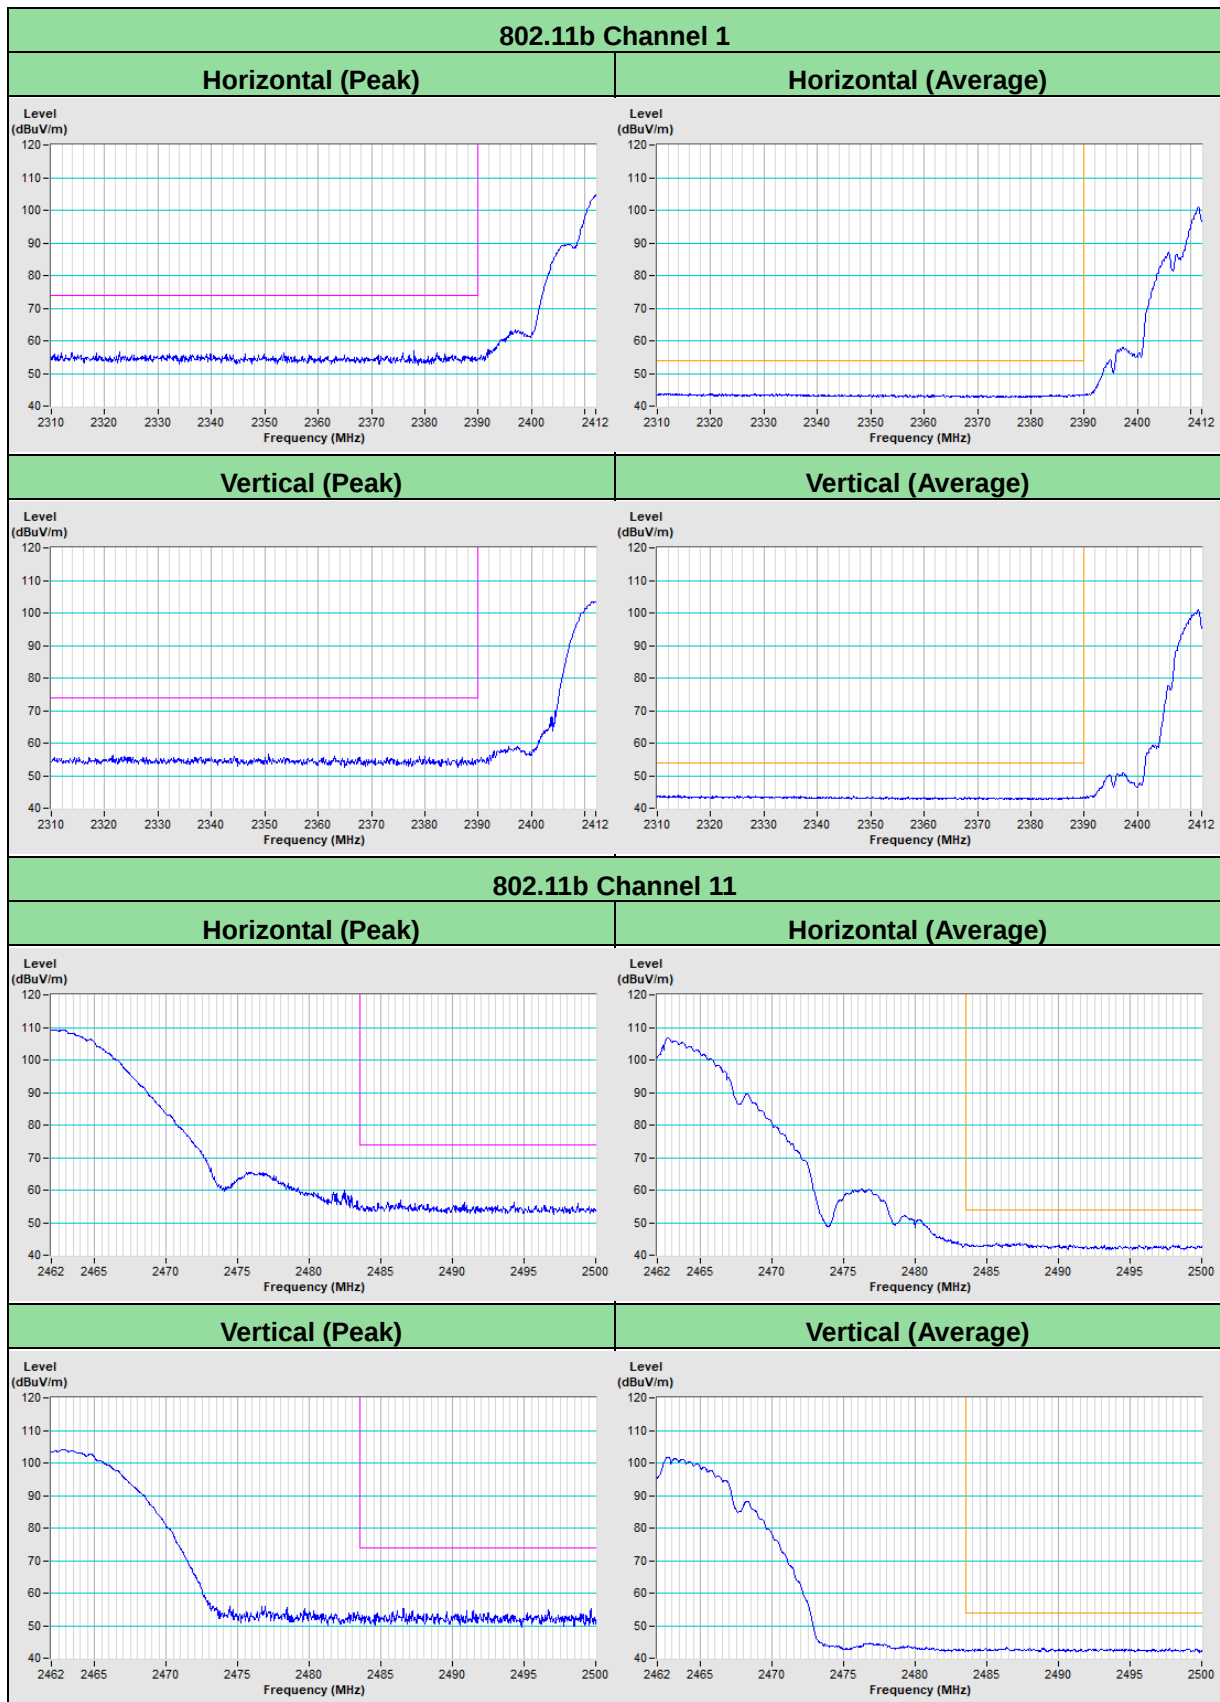

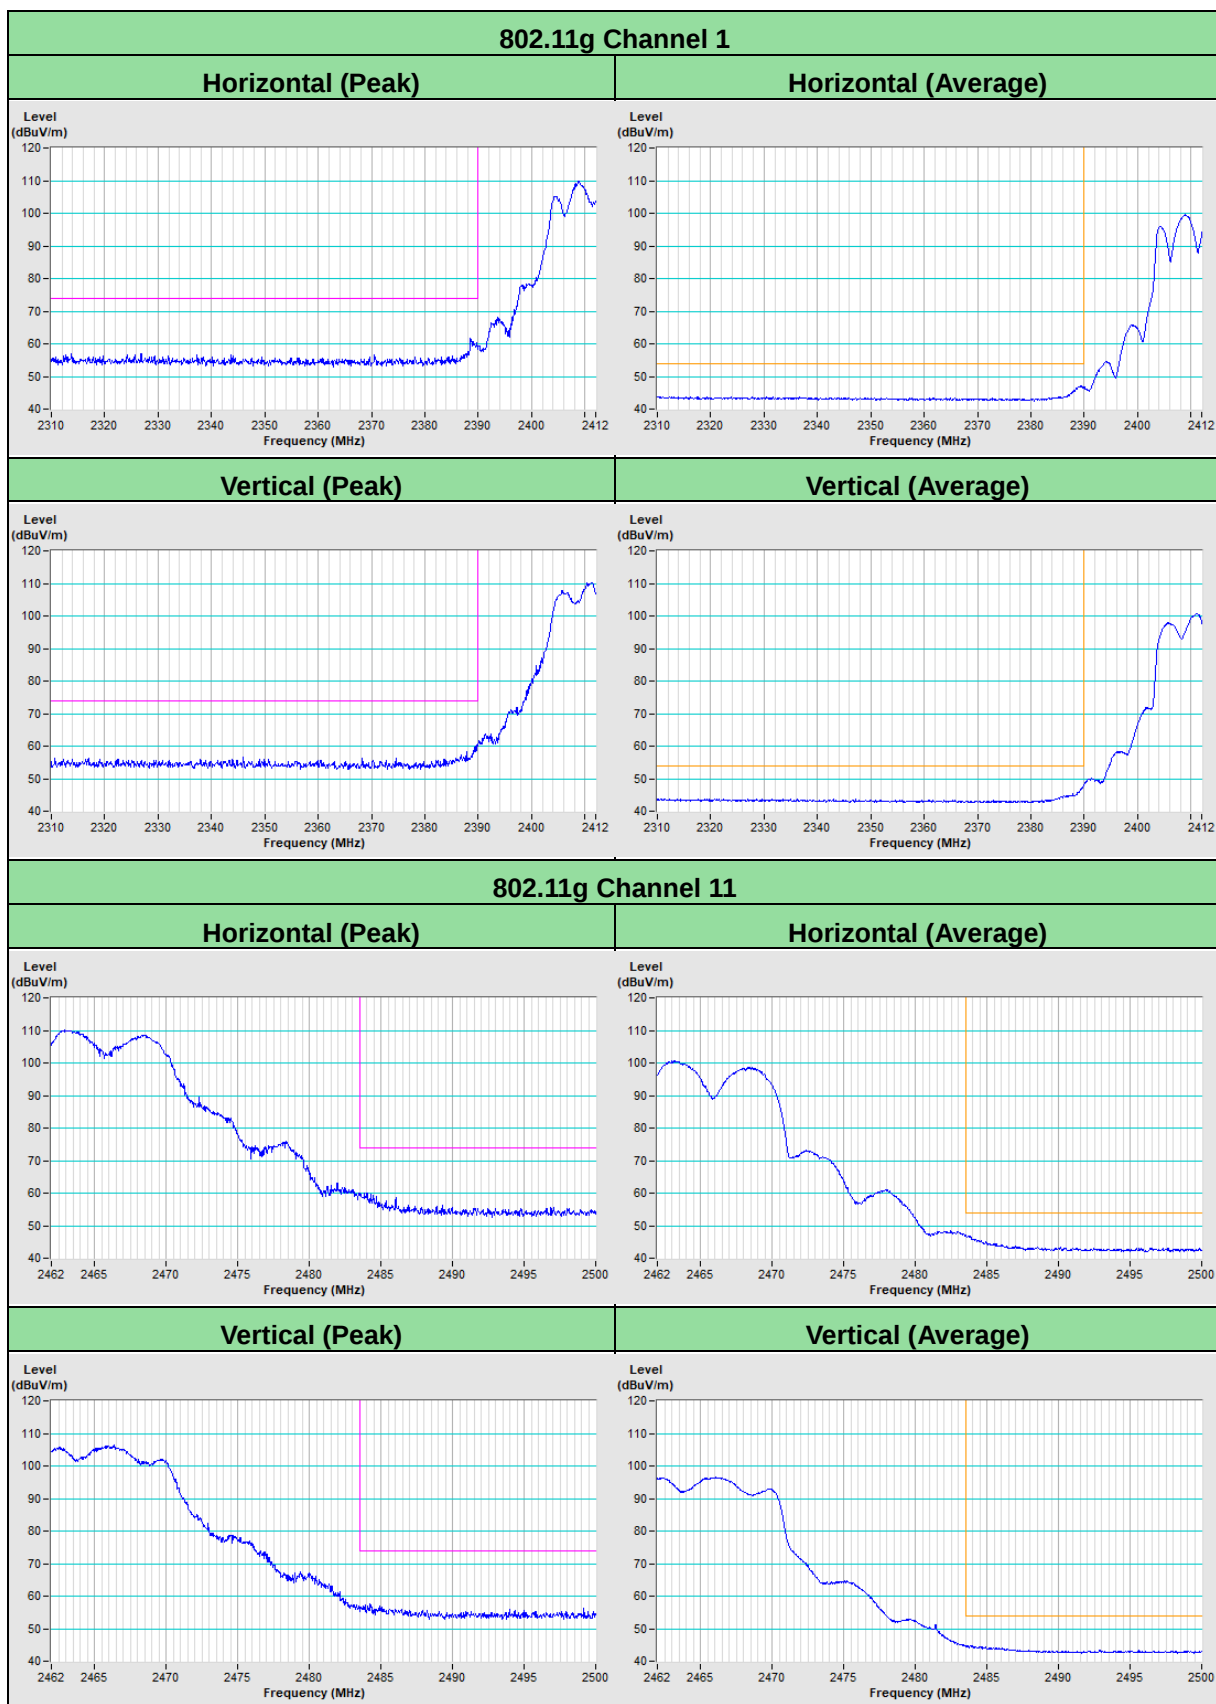

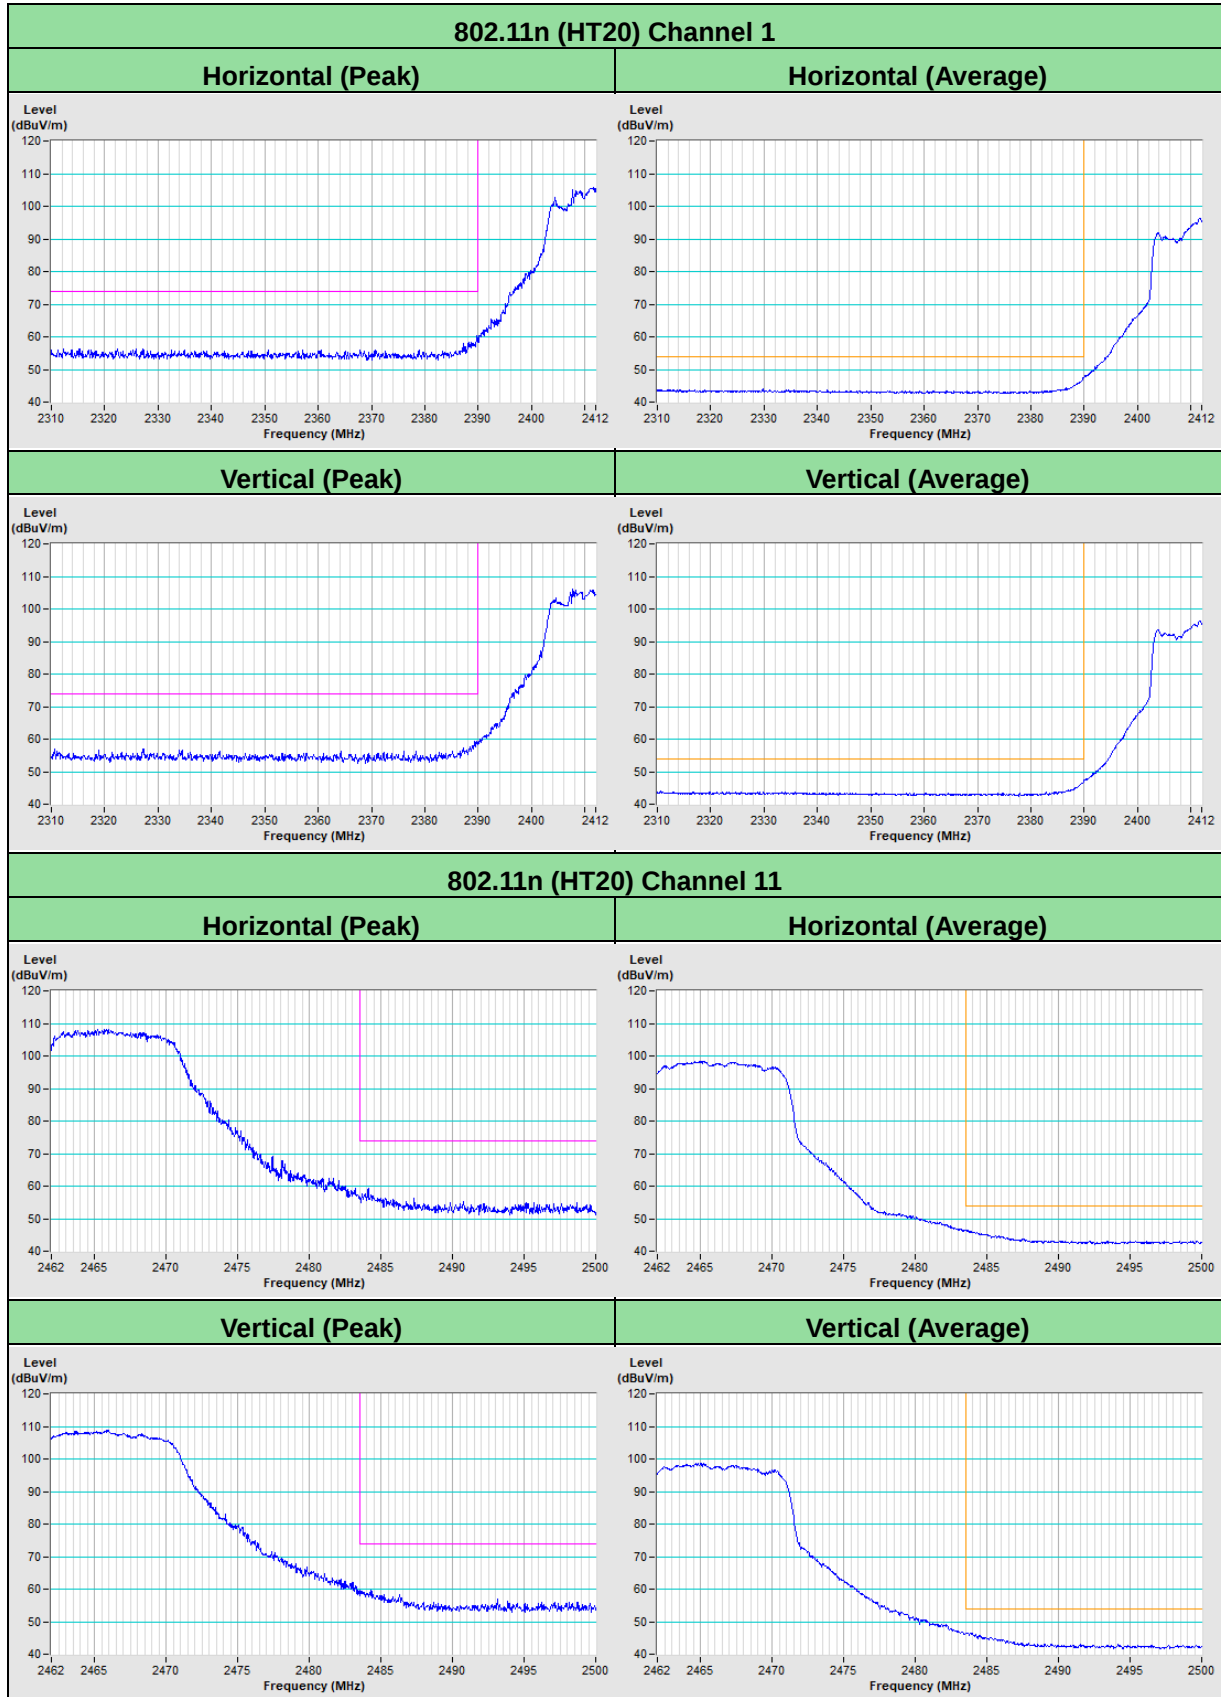

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---