



FCC TEST REPORT

REPORT NO.: RF110321E07

MODEL NO.: Y-R0021

FCC ID: JNZYR0021

RECEIVED: Mar. 21, 2011

TESTED: Mar. 29 to Apr. 08, 2011

ISSUED: Apr. 12, 2011

APPLICANT: LOGITECH FAR EAST LTD.

ADDRESS: #2 Creation Rd. 4, Science-Based Ind. Park
Hsinchu Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (2): No.49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 40 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 CERTIFICATION	5
2 SUMMARY OF TEST RESULTS.....	6
2.1 MEASUREMENT UNCERTAINTY	7
3 GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT.....	8
3.2 DESCRIPTION OF TEST MODES.....	9
3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	10
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.5 DESCRIPTION OF SUPPORT UNITS	12
3.6 CONFIGURATION OF SYSTEM UNDER TEST.....	12
4 TEST PROCEDURES AND RESULTS	13
4.1 NUMBER OF HOPPING FREQUENCY USED	13
4.1.1 LIMIT OF HOPPING FREQUENCY USED.....	13
4.1.2 TEST INSTRUMENTS.....	13
4.1.3 TEST PROCEDURES	13
4.1.4 DEVIATION FROM TEST STANDARD	13
4.1.5 TEST SETUP	14
4.1.6 TEST RESULTS	14
4.2 DWELL TIME ON EACH CHANNEL	16
4.2.1 LIMIT OF DWELL TIME USED	16
4.2.2 TEST INSTRUMENTS.....	16
4.2.3 TEST PROCEDURES	16
4.2.4 DEVIATION FROM TEST STANDARD	17
4.2.5 TEST SETUP	17
4.2.6 TEST RESULTS.....	17
4.3 CHANNEL BANDWIDTH	19
4.3.1 LIMITS OF CHANNEL BANDWIDTH	19
4.3.2 TEST INSTRUMENTS.....	19
4.3.3 TEST PROCEDURE.....	19
4.3.4 DEVIATION FROM TEST STANDARD	19
4.3.5 TEST SETUP	20
4.3.6 EUT OPERATING CONDITION	20
4.3.7 TEST RESULTS	21
4.4 HOPPING CHANNEL SEPARATION	22
4.4.1 LIMIT OF HOPPING CHANNEL SEPARATION.....	22
4.4.2 TEST INSTRUMENTS.....	22
4.4.3 TEST PROCEDURES	22
4.4.4 DEVIATION FROM TEST STANDARD	22
4.4.5 TEST SETUP	22
4.4.6 TEST RESULTS.....	23
4.5 MAXIMUM PEAK OUTPUT POWER	24
4.5.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	24
4.5.2 INSTRUMENTS	24



A D T

4.5.3	TEST PROCEDURES	24
4.5.4	DEVIATION FROM TEST STANDARD	24
4.5.5	TEST SETUP	25
4.5.6	EUT OPERATING CONDITION	25
4.5.7	TEST RESULTS	26
4.6	RADIATED EMISSION MEASUREMENT	27
4.6.1	LIMITS OF RADIATED EMISSION MEASUREMENT	27
4.6.2	TEST INSTRUMENTS.....	28
4.6.3	TEST PROCEDURES	30
4.6.4	DEVIATION FROM TEST STANDARD	30
4.6.5	TEST SETUP	31
4.6.6	TEST RESULTS	32
4.7	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	36
4.8.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	36
4.8.2	TEST INSTRUMENTS.....	36
4.8.3	TEST PROCEDURE.....	36
4.8.4	DEVIATION FROM TEST STANDARD	36
4.8.5	EUT OPERATING CONDITION	36
4.8.6	TEST RESULTS	37
5	INFORMATION ON THE TESTING LABORATORIES.....	39
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	40



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
Original release	NA	Apr. 12, 2011



1 CERTIFICATION

PRODUCT : Bluetooth Keyboard
BRAND NAME : Logitech
MODEL NO. : Y-R0021
APPLICANT : LOGITECH FAR EAST LTD.
TESTED DATE : Mar. 29 to Apr. 08, 2011
TEST SAMPLE : ENGINEERING SAMPLE
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003
ANSI C63.10-2009

The above equipment (Model: Y-R0021) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : , **DATE:** Apr. 12, 2011
(Claire Kuan, Specialist)

APPROVED BY : , **DATE:** Apr. 12, 2011
(May Chen, Deputy Manager)



A D T

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	NA	Power supply is 3VDC from batteries
15.247(a)(1) 15.247(b)(1)	Number of Hopping Frequency Used Spec.: At least 75 channels	PASS	Meet the requirement of limit
15.247(a)(1) (iii)	Dwell Time on Each Channel Spec.: Max. 0.4 second within 31.6 second	PASS	Meet the requirement of limit
15.247(a)(1) 15.215(c)	1. Hopping Channel Separation Spec. : Min. 25 kHz or 20 dB bandwidth, which ever is greater 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit
15.247(b)(1)	Maximum Peak Output Power Spec.: max. 1W	PASS	Meet the requirement of limit
15.247(d)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -5.5dB at 58.66MHz
15.247(d)	Conducted Out-Band Emissions Measurement	PASS	Meet the requirement of limit
15.203	Antenna Requirement	PASS	No Antenna connector is used.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Radiated emissions (30MHz-1GHz)	3.21 dB
Radiated emissions (1GHz ~18GHz)	2.19 dB
Radiated emissions (18GHz ~40GHz)	2.55 dB



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Bluetooth Keyboard
MODEL NO.	Y-R0021
FCC ID	JNZYR0021
POWER SUPPLY	DC 3V from batteries
MODULATION TYPE	GFSK
MODULATION TECHNOLOGY	FHSS
TRANSFER RATE	DH 1
FREQUENCY RANGE	2402MHz ~ 2480MHz
NUMBER OF CHANNEL	79
CHANNEL SPACING	1 MHz
MAXIMUM OUTPUT POWER	0.7mW
ANTENNA TYPE	PCB printed whip antenna(Gain: -2.91dBi)
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT has one RFID Passive tag inside.
2. The above EUT information was declared by the manufacturer and for more detailed feature descriptions, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

Seventy-nine channels are provided to this EUT.

Channel	Freq. (MHz)						
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
-	-	√	√	√	-

Where **PLC**: Power Line Conducted Emission

RE < 1G: Radiated Emission below 1GHz

RE ≥ 1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Below 1 GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	39	FHSS	GFSK	DH1

Radiated Emission Test (Above 1 GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0, 39, 78	FHSS	GFSK	DH1

Conducted Out-Band Emission Measurement:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0, 78	FHSS	GFSK	DH1

Antenna Port Conducted Measurement:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0, 39, 78	FHSS	GFSK	DH1



A D T

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE ³ 1G	22deg. C, 60%RH, 1025 hPa	DC 3V from batteries	Frank Liu
RE<1G	20deg. C, 72%RH, 1022 hPa	DC 3V from batteries	Kent Liu
PLC	20deg. C, 60%RH, 1025 hPa	DC 3V from batteries	Rex Huang
APCM	20deg. C, 60%RH, 1025 hPa	DC 3V from batteries	Rex Huang

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003


ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit.

3.6 CONFIGURATION OF SYSTEM UNDER TEST

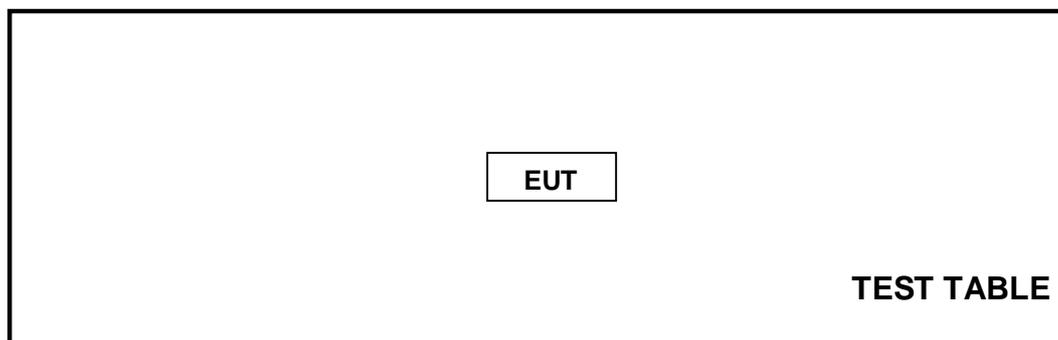

4 TEST PROCEDURES AND RESULTS

4.1 NUMBER OF HOPPING FREQUENCY USED

4.1.1 LIMIT OF HOPPING FREQUENCY USED

At least 75 hopping frequencies, and should be equally spaced.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.1.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP


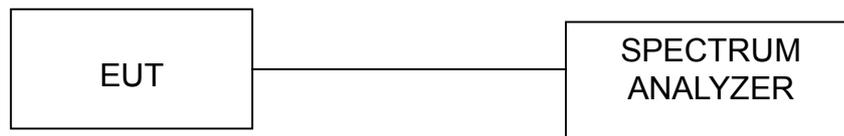


4.1.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.



A D T

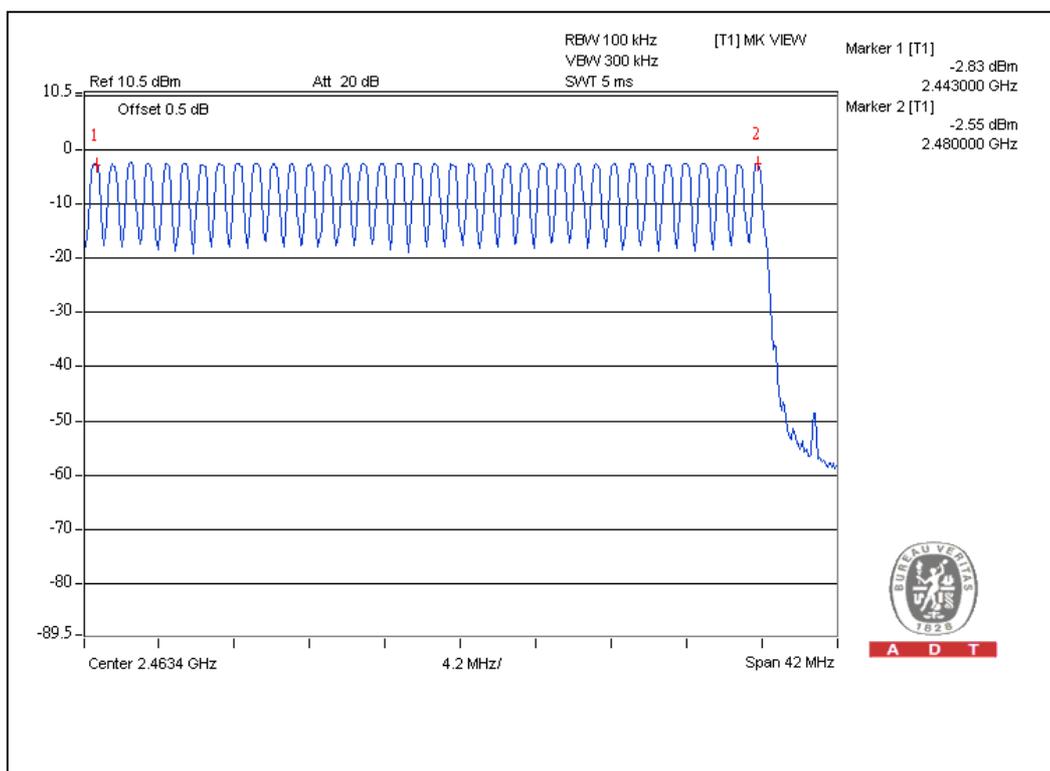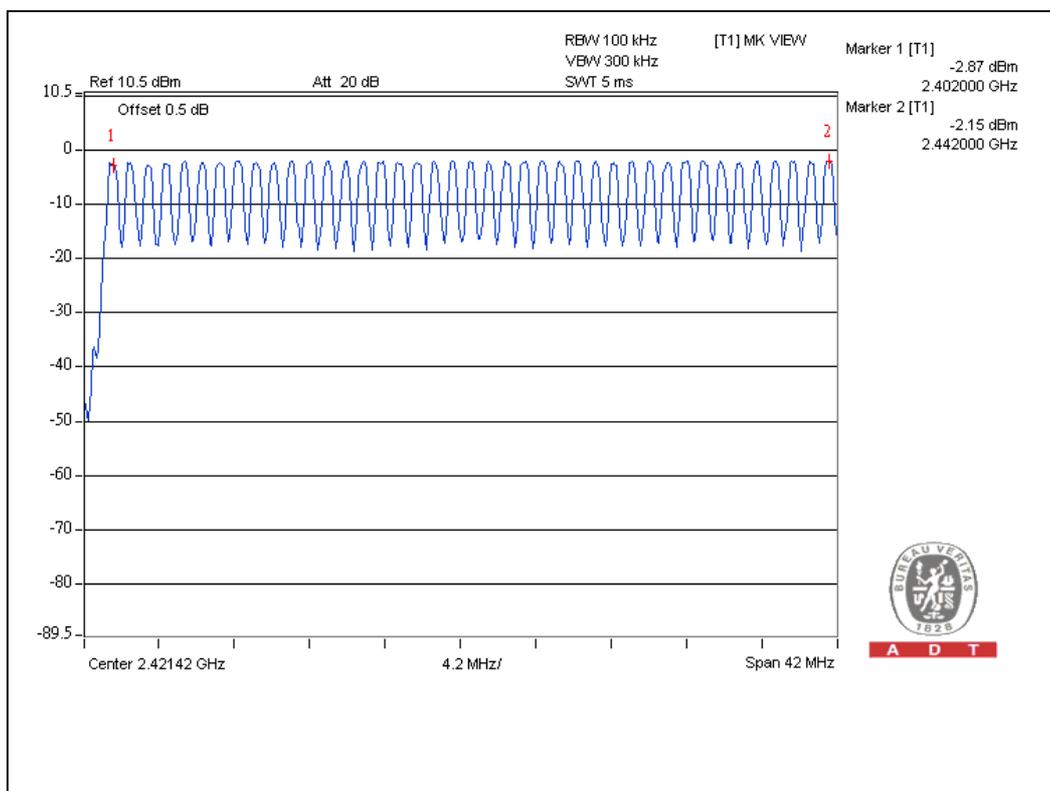

4.2 DWELL TIME ON EACH CHANNEL

4.2.1 LIMIT OF DWELL TIME USED

For FHSS, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 31.6 second period. For hybrid systems, the average time of occupancy on any frequency should not exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.2.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP



4.2.6 TEST RESULTS



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	48 (times / 5 sec) *6.32=303.36 times	0.21	63.7	400

Test plots of the transmitting time slot are shown on next page.



A D T

DH1

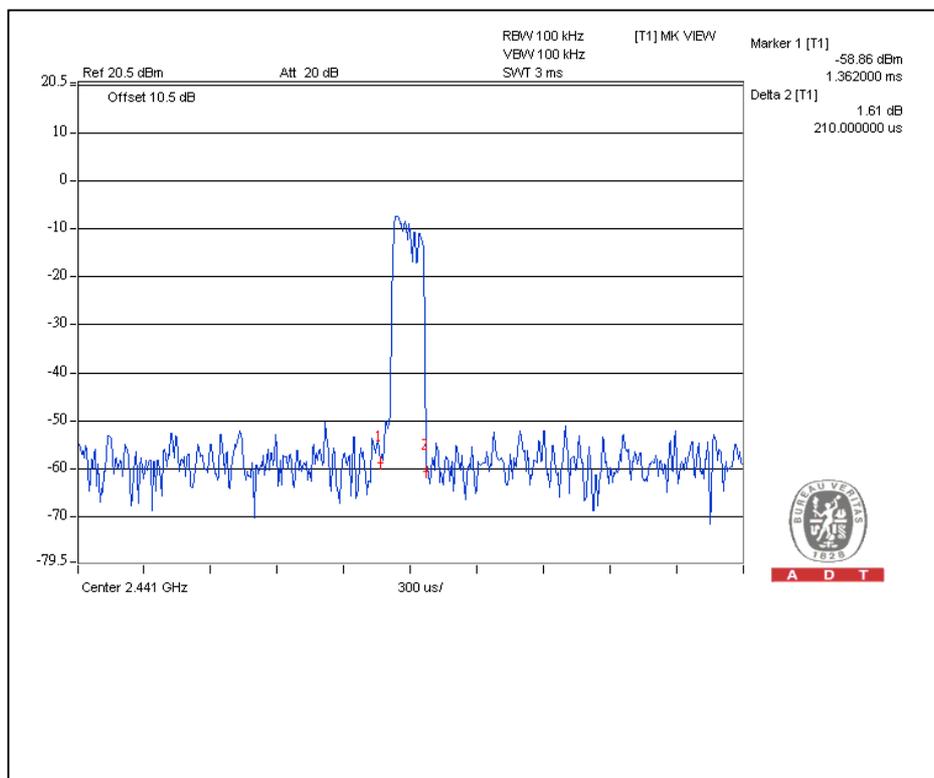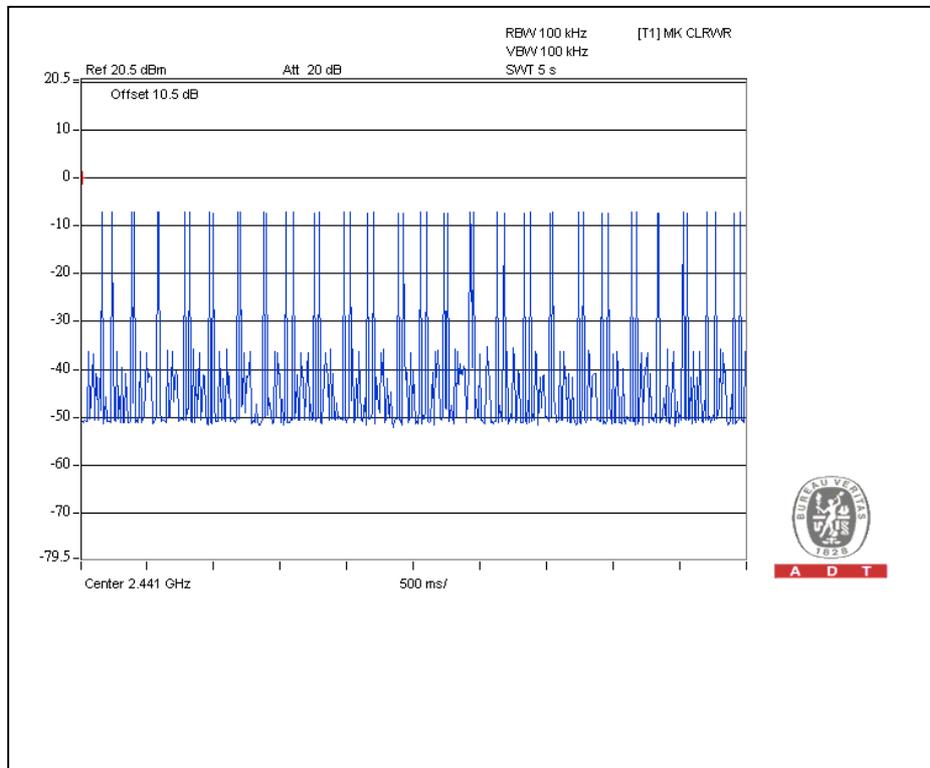



4.3 CHANNEL BANDWIDTH

4.3.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

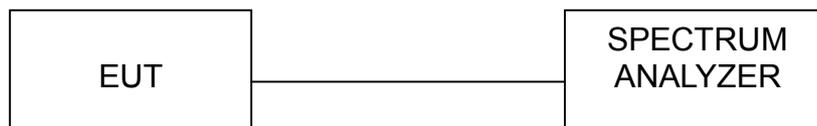

4.3.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.




A D T

4.3.7 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	0.967
39	2441	0.966
78	2480	0.967

Channel 0

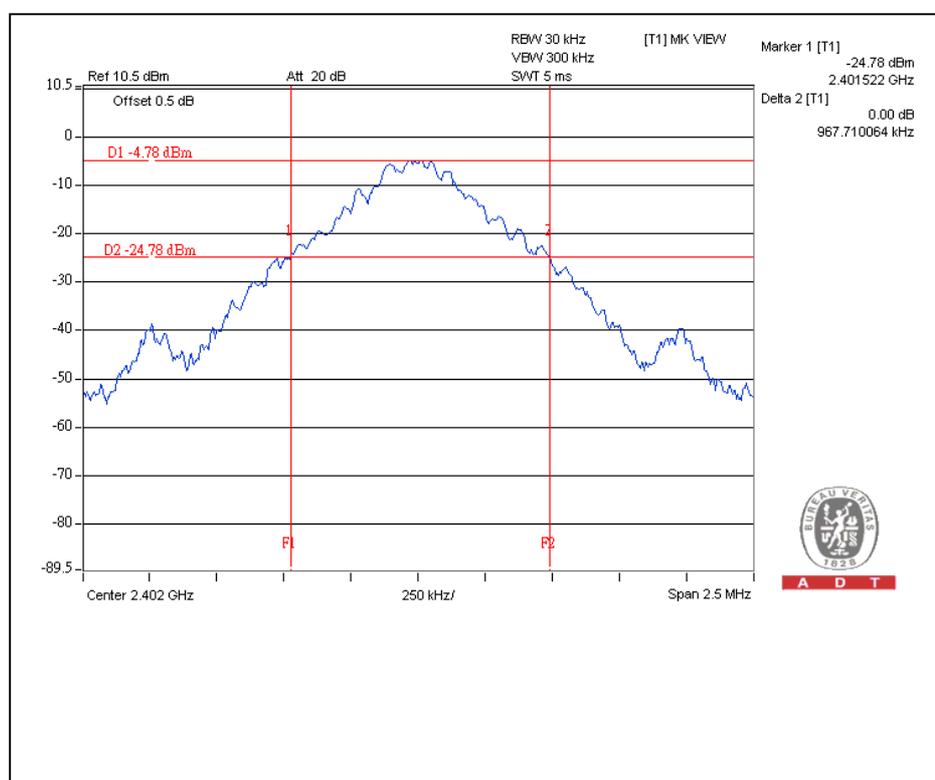

4.4 HOPPING CHANNEL SEPARATION

4.4.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25 kHz or 20dB hopping channel bandwidth (whichever is greater).

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

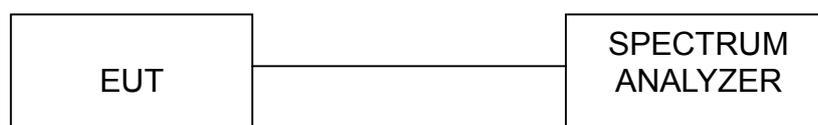

4.5 MAXIMUM PEAK OUTPUT POWER

4.5.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 1W.

4.5.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3 MHz RBW and 10 MHz VBW.
4. Measure the captured power within the band and recording the plot.
5. Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.5.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.




A D T

4.5.7 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER OUTPUT (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
0	2402	-1.9	0.65	1	PASS
39	2441	-1.6	0.69	1	PASS
78	2480	-1.7	0.68	1	PASS

Channel 39

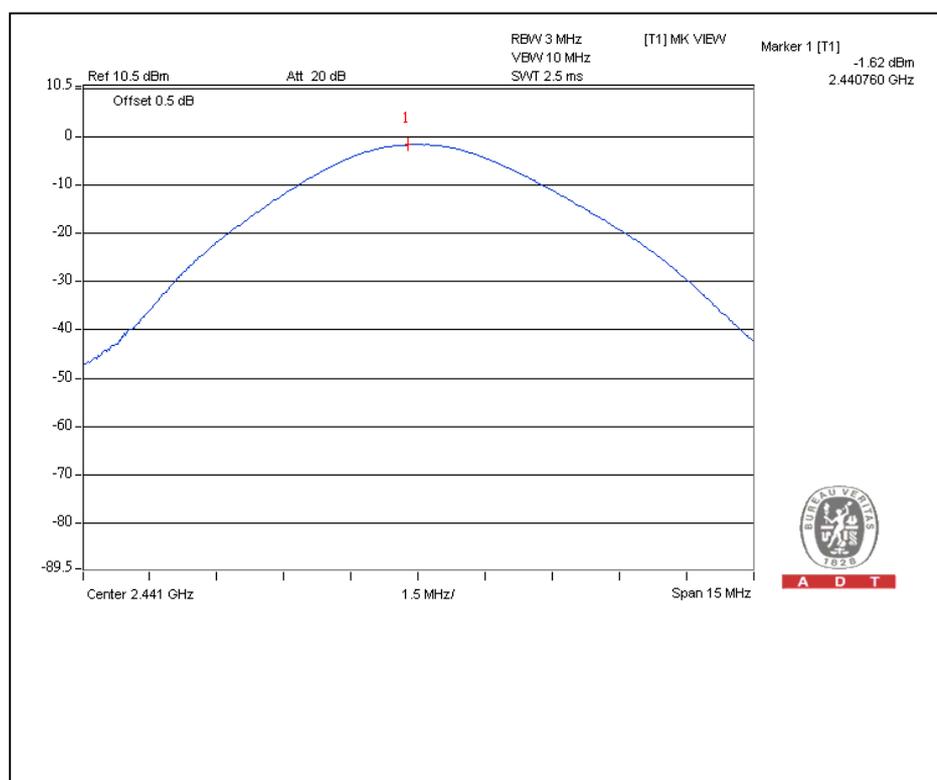

4.6 RADIATED EMISSION MEASUREMENT

4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

1. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
2. Section 15.205 restricted bands of operation shall compliance with the limits in Section 15.209.



A D T

4.6.2 TEST INSTRUMENTS

For below 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4443A	MY48250349	July 29, 2010	July 28, 2011
	E4443A	MY49420002	Aug. 11, 2010	Aug. 10, 2011
Agilent Pre-Selector	N9039A	MY46520331	Aug. 11, 2010	Aug. 10, 2011
	N9039A	MY46520309	July 29, 2010	July 28, 2011
Agilent Signal Generator	N5181A	MY49060520	Aug. 12, 2010	Aug. 11, 2011
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-01	Nov. 16, 2010	Nov. 15, 2011
	ZFL-1000VH2B	AMP-ZFL-02	Nov. 16, 2010	Nov. 15, 2011
Mini-Circuits Pre Amplifier (1~18GHz)	ZVA-183-S+	AMP-ZVA-01	Nov. 16, 2010	Nov. 15, 2011
SPACEK LABS (18~40GHz)	SLKKa-48-6	9K16	Nov. 16, 2010	Nov. 15, 2011
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-359	April 30, 2010	April 29, 2011
	VULB 9168	9168-358	April 30, 2010	April 29, 2011
SCHWARZBECK Horn Antenna	BBHA 9170	9170-424	Oct. 08, 2010	Oct. 07, 2011
	BBHA 9120	9120D-783	Oct. 08, 2010	Oct. 07, 2011
RF CABLE	NA	RF104-110 RF104-206 RF104-209	Dec. 22, 2010	Dec. 21, 2011
RF Cable	8DFB	CHFCAB-001 CHFCAB-002 CHFCAB-003	Nov. 16, 2010	Nov. 15, 2011
Software	ADT_Radiated_ V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in 10m Chamber No. F.

3. The FCC Site Registration No. is 928149.

4. The VCCI Site Registration No. is R-3252 & G-136.

5. The CANADA Site Registration No. is IC 7450H-1.



A D T

For above 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 14, 2010	July 13, 2011
Agilent Pre-Selector	N9039A	MY46520311	July 14, 2010	July 13, 2011
Agilent Signal Generator	N5181A	MY49060517	July 14, 2010	July 13, 2011
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-03	Nov. 16, 2010	Nov. 15, 2011
Agilent Pre-Amplifier	8449B	3008A02578	July 05, 2010	July 04, 2011
Miteq Pre-Amplifier	AFS33-1800265 0-30-8P-44	881786	NA	NA
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-360	Apr. 29, 2010	Apr. 28, 2011
AISI Horn_Antenna	AIH.8018	0000320091110	Nov. 12, 2010	Nov. 11, 2011
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 08, 2010	Oct. 07, 2011
RF CABLE	NA	RF104-201 RF104-203 RF104-204	Dec. 27, 2010	Dec. 26, 2011
RF Cable	NA	CHGCAB_001	NA	NA
Software	ADT_Radiated_ V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.

4.6.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 10 meters chamber room for below 1GHz test and 3 meters chamber room for above 1GHz test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

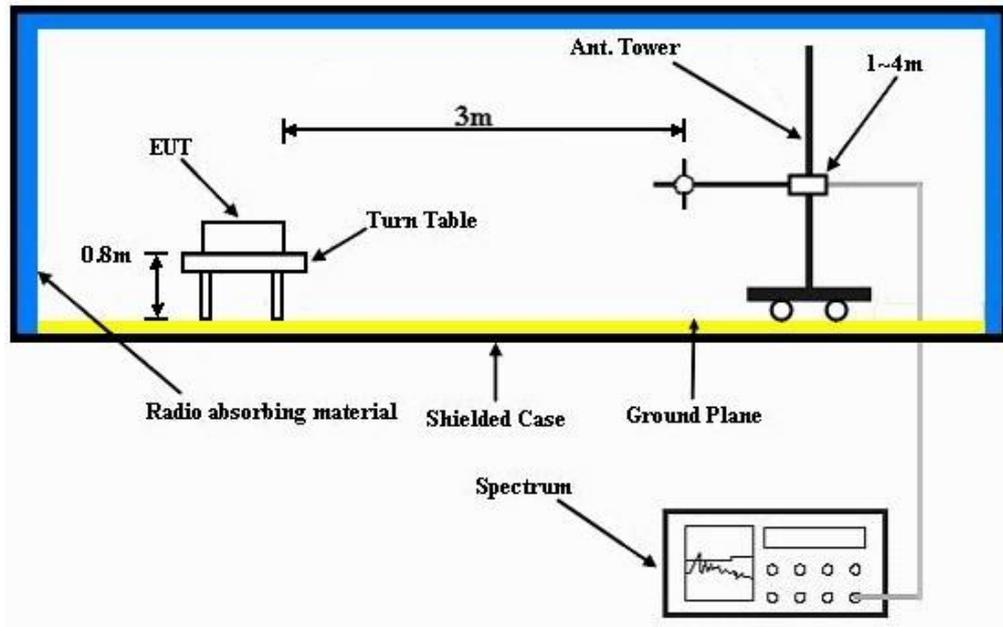

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.6.6 TEST RESULTS

BELOW 1GHz WORST-CASE DATA : GFSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	DC 3V from batteries	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	18deg. C, 63%RH 1025 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	228.00	38.4 QP	46.0	-7.6	1.25 H	136	26.08	12.28
2	239.96	31.2 QP	46.0	-14.8	1.25 H	137	18.32	12.90
3	779.97	32.9 QP	46.0	-13.1	1.00 H	61	8.18	24.73
4	792.05	33.3 QP	46.0	-12.7	1.00 H	98	8.38	24.89
5	815.97	33.9 QP	46.0	-12.1	1.00 H	103	8.62	25.30
6	864.05	36.6 QP	46.0	-9.5	1.00 H	65	10.37	26.18
7	876.01	32.1 QP	46.0	-13.9	1.00 H	61	5.75	26.38
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.00	34.2 QP	40.0	-5.8	1.00 V	26	20.35	13.85
2	58.66	34.5 QP	40.0	-5.5	1.00 V	198	20.90	13.63
3	76.54	32.4 QP	40.0	-7.6	1.25 V	127	22.13	10.30
4	228.00	25.3 QP	46.0	-20.7	1.75 V	205	13.02	12.28
5	284.14	26.9 QP	46.0	-19.1	1.50 V	360	12.11	14.81
6	720.05	26.7 QP	46.0	-19.3	1.00 V	306	2.81	23.93
7	864.05	29.3 QP	46.0	-16.7	1.75 V	341	3.10	26.18

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

ABOVE 1GHZ WORST-CASE DATA

GFSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	DC 3V from batteries	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	22deg. C, 60%RH 1025 hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.7 PK	74.0	-20.3	1.00 H	72	42.85	10.85
2	2390.00	15.7 AV	54.0	-38.3	1.00 H	72	-1.25	10.85
3	*2402.00	97.3 PK			1.00 H	72	86.44	10.86
4	*2402.00	59.3 AV			1.00 H	72	42.34	10.86
5	4804.00	51.7 PK	74.0	-22.3	1.04 H	283	39.39	12.31
6	4804.00	13.7 AV	54.0	-40.3	1.04 H	283	-4.71	12.31
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.4 PK	74.0	-19.6	1.01 V	292	42.93	11.47
2	2390.00	16.4 AV	54.0	-37.6	1.01 V	292	-1.17	11.47
3	*2402.00	92.2 PK			1.01 V	294	80.72	11.48
4	*2402.00	54.2 AV			1.01 V	294	36.62	11.48
5	4804.00	52.7 PK	74.0	-21.3	1.00 V	309	39.77	12.93
6	4804.00	14.7 AV	54.0	-39.3	1.00 V	309	-4.33	12.93

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH1 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625*2 per 1.25ms per channel. Therefore, the duty cycle correction factor be equal to: $20\log(1.25/100) = -38\text{dB}$
 7. Average value = peak reading + $20\log(\text{duty cycle})$.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	DC 3V from batteries	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	22deg. C, 60%RH 1025 hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	98.2 PK			1.00 H	69	87.31	10.89
2	*2441.00	60.2 AV			1.00 H	69	43.21	10.89
3	4882.00	52.4 PK	74.0	-21.6	1.06 H	284	40.06	12.34
4	4882.00	14.4 AV	54.0	-39.6	1.06 H	284	-4.04	12.34
5	7323.00	56.7 PK	74.0	-17.3	1.29 H	64	43.00	13.70
6	7323.00	18.7 AV	54.0	-35.3	1.29 H	64	-1.10	13.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	93.6 PK			1.00 V	284	82.09	11.51
2	*2441.00	55.6 AV			1.00 V	284	37.99	11.51
3	4882.00	52.4 PK	74.0	-21.6	1.00 V	304	39.44	12.96
4	4882.00	14.4 AV	54.0	-39.6	1.00 V	304	9.34	12.96
5	7323.00	58.1 PK	74.0	-15.9	1.00 V	214	43.78	14.32
6	7323.00	20.1 AV	54.0	-33.9	1.00 V	214	-0.32	14.32

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH1 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625*2 per 1.25ms per channel. Therefore, the duty cycle correction factor be equal to: $20\log(1.25/100) = -38\text{dB}$
 7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	DC 3V from batteries	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	22deg. C, 60%RH 1025 hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	99.5 PK			1.00 H	77	88.58	10.92
2	*2480.00	61.5 AV			1.00 H	77	44.48	10.92
3	2483.60	56.0 PK	74.0	-18.0	1.00 H	77	45.08	10.92
4	2483.60	18.0 AV	54.0	-36.0	1.00 H	77	14.98	10.92
5	4960.00	51.9 PK	74.0	-22.1	1.07 H	292	39.52	12.38
6	4960.00	13.9 AV	54.0	-40.1	1.07 H	292	-4.58	12.38
7	7440.00	56.4 PK	74.0	-17.6	1.23 H	73	42.66	13.74
8	7440.00	18.4 AV	54.0	-35.6	1.23 H	73	-1.44	13.74
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	95.2 PK			1.05 V	293	83.66	11.54
2	*2480.00	57.2 AV			1.05 V	293	39.56	11.54
3	2483.50	55.1 PK	74.0	-18.9	1.05 V	293	43.56	11.54
4	2483.50	17.1 AV	54.0	-36.9	1.05 V	293	-0.54	11.54
5	4960.00	51.6 PK	74.0	-22.4	1.00 V	296	38.60	13.00
6	4960.00	13.6 AV	54.0	-40.4	1.00 V	296	-5.50	13.00
7	7440.00	57.4 PK	74.0	-16.6	1.00 V	213	43.04	14.36
8	7440.00	19.4 AV	54.0	-34.6	1.00 V	213	-1.06	14.36

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH1 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625*2 per 1.25ms per channel. Therefore, the duty cycle correction factor be equal to: $20\log(1.25/100) = -38\text{dB}$
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

4.7 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.8.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz RBW).

4.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges were measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation


4.8.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.


4.8.6 TEST RESULTS

Emissions radiated outside of the specified frequency bands, please refer following pages for met the requirement of the general radiated emission limits in § 15.209.

CH0

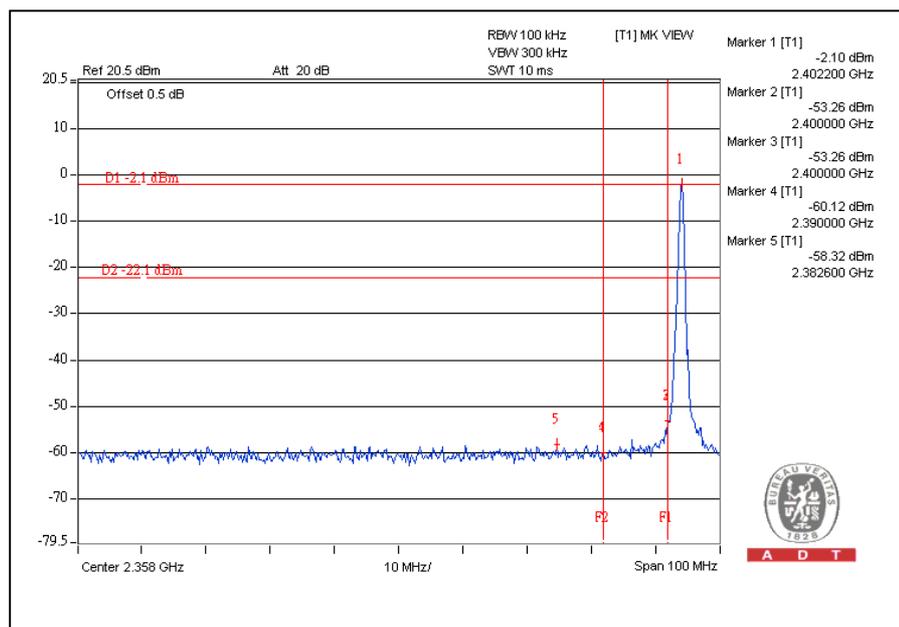


CH78

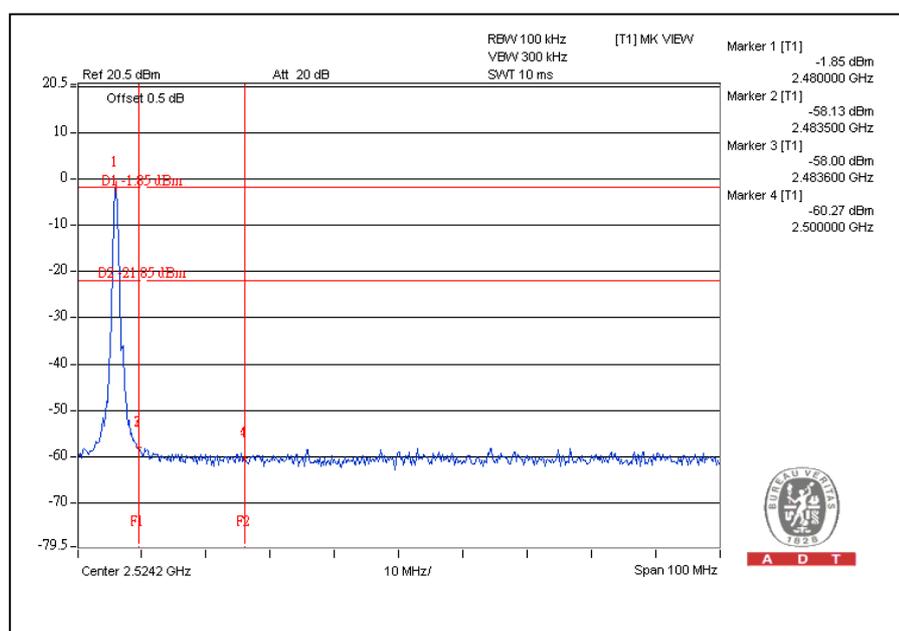




A D T

CH0

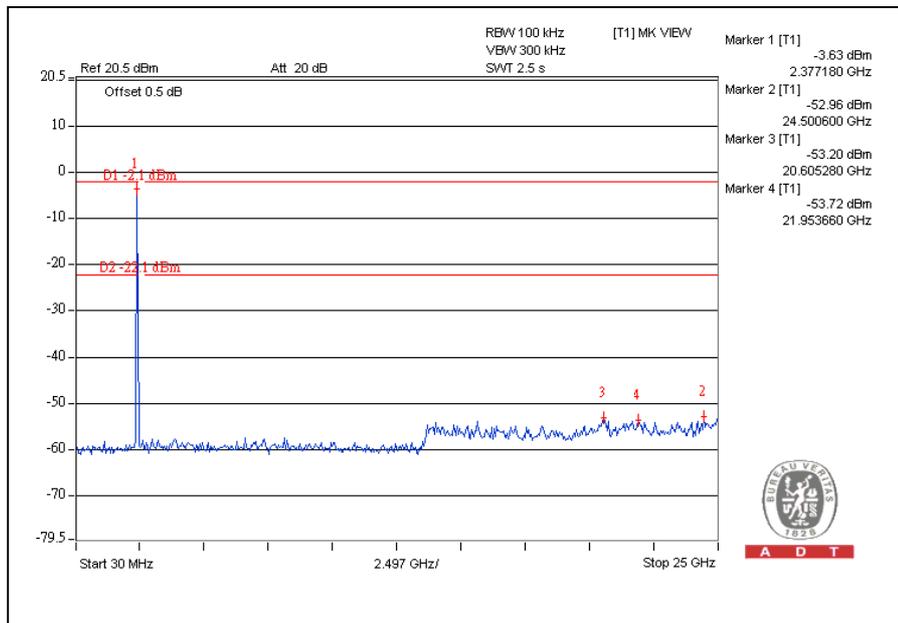

CH78

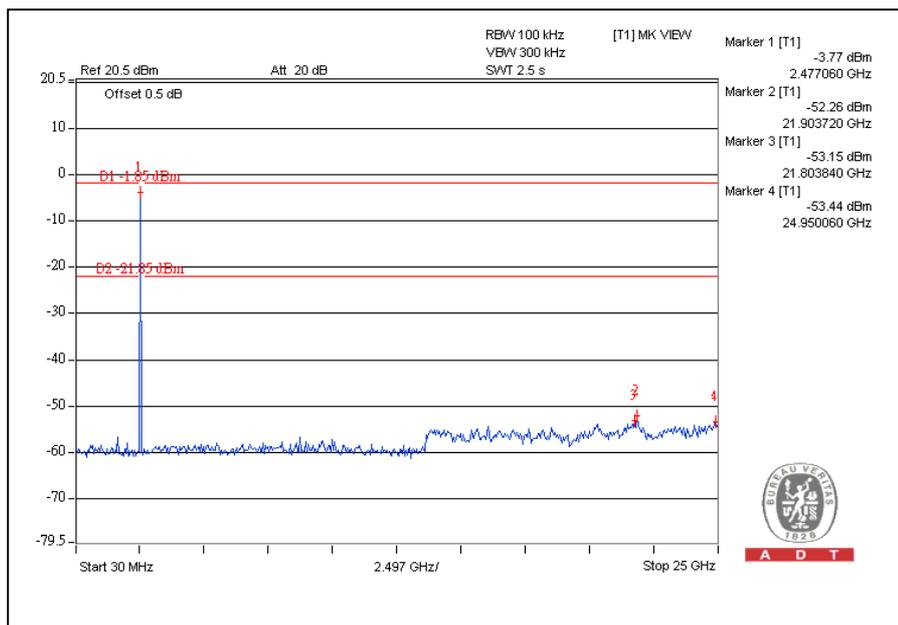



5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025:

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5.phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---