

## 8. Spurious Emissions - Radiated -

### 8.1 Measurement procedure

[FCC 15.247(d), 15.205, 15.209, KDB 558074 D01 v03r05, Section 12.1]

Test was applied by following conditions.

Test method	:	ANSI C63.10
Frequency range	:	9kHz to 25GHz
Test place	:	3m Semi-anechoic chamber
EUT was placed on	:	Styrofoam table / (W)1.0m × (D)1.0m × (H)0.8m (below 1GHz) Styrofoam table / (W)0.6m × (D)0.6m × (H)1.5m (above 1GHz)
Antenna distance	:	3m
Test receiver setting	:	Below 1GHz
- Detector	:	Average (9kHz-90kHz, 110kHz-490kHz), Quasi-peak
- Bandwidth	:	200Hz, 120kHz
Spectrum analyzer setting	:	Above 1GHz
- Peak	:	RBW=1MHz, VBW=3MHz, Span=0Hz, Sweep=auto
- Average	:	RBW=1MHz, VBW=10Hz, Span=0Hz, Sweep=auto Display mode=Linear

#### Average Measurement Setting [VBW]

Mode	Duty Cycle (%)	T <sub>on</sub> (us)	T <sub>off</sub> (us)	Determined VBW Setting
IEEE802.11b	99.22	1024	8	10Hz (Duty Cycle $\geq$ 98%)
IEEE802.11g	99.27	1362	10	10Hz (Duty Cycle $\geq$ 98%)
IEEE802.11n(HT20)	99.38	1276	8	10Hz (Duty Cycle $\geq$ 98%)


Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, Biconical antenna, Log periodic antenna and Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop antenna is 1m above the ground plane.

The EUT is Placed on a turntable, which is 0.8m/1.5m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

- Test configuration

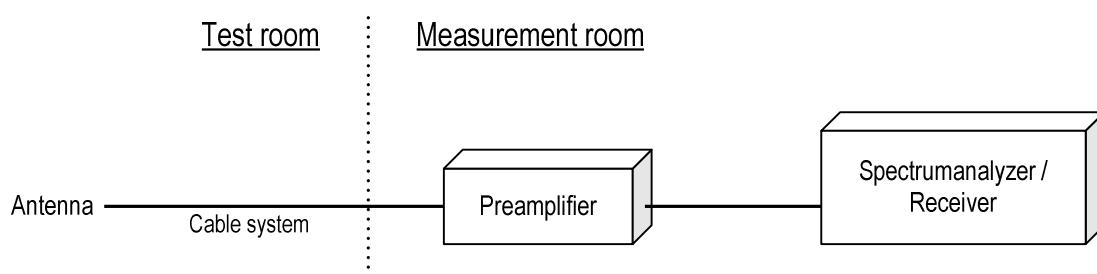

## 8.2 Calculation method

[9kHz to 150kHz]

Emission level = Reading + (Ant. factor + Cable system loss )

Margin = Limit – Emission level

[150kHz to 25GHz]

Emission level = Reading + (Ant. factor + Cable system loss – Amp. Gain)

Margin = Limit – Emission level

Example:

Limit @ 4824.0MHz : 74.0dBuV/m (Peak Limit)

S.A Reading = 49.5dBuV Cable system loss = 8.4dB

Result = 49.5 + 8.4 = 45.1dBuV/m

Margin = 74.0 - 45.1 = 16.1dB

## 8.3 Limit

Frequency [MHz]	Field strength		Distance [m]
	[uV/m]	[dBuV/m]	
0.009-0.490	2400 / F [kHz]	20logE [uV/m]	300
0.490-1.705	24000 / F [kHz]	20logE [uV/m]	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20log Emission [uV/m]
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition modulation.

#### 8.4 Test data


Date	:	December 12, 2016		
Temperature	:	22.5 [°C]	Test engineer	
Humidity	:	21.5 [%]		
Test place	:	3m Semi-anechoic chamber		<u>Kazunori Saito</u>
Date	:	December 15, 2016		
Temperature	:	21.9 [°C]	Test engineer	
Humidity	:	25.7 [%]		
Test place	:	3m Semi-anechoic chamber		<u>Kazunori Saito</u>
Date	:	December 16, 2016		
Temperature	:	22.9 [°C]	Test engineer	
Humidity	:	23.3 [%]		
Test place	:	3m Semi-anechoic chamber		<u>Kazunori Saito</u>

### 11.4.1 Transmission mode

[11b]

Channel Low  
BELOW 1GHz

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

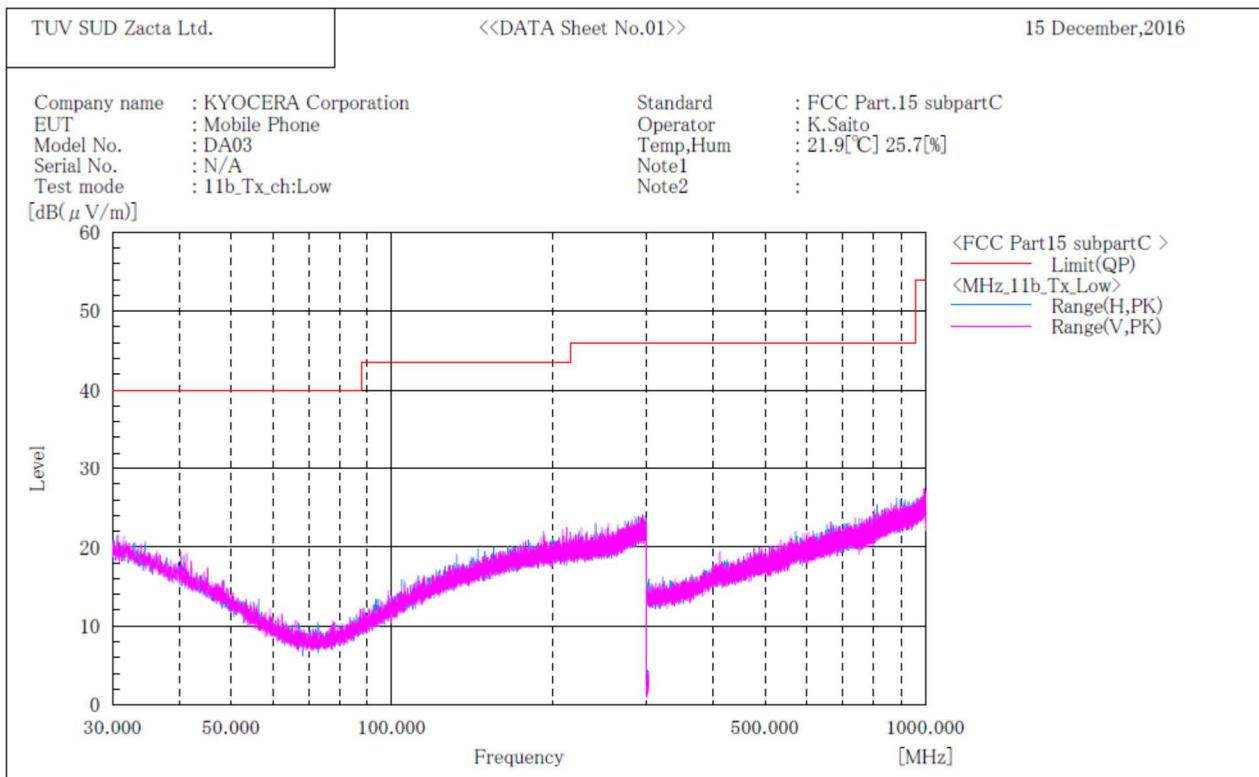

#### Final Result


No.	Frequency (P)	c. f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

#### Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11b]**  
**Channel Low**  
**ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

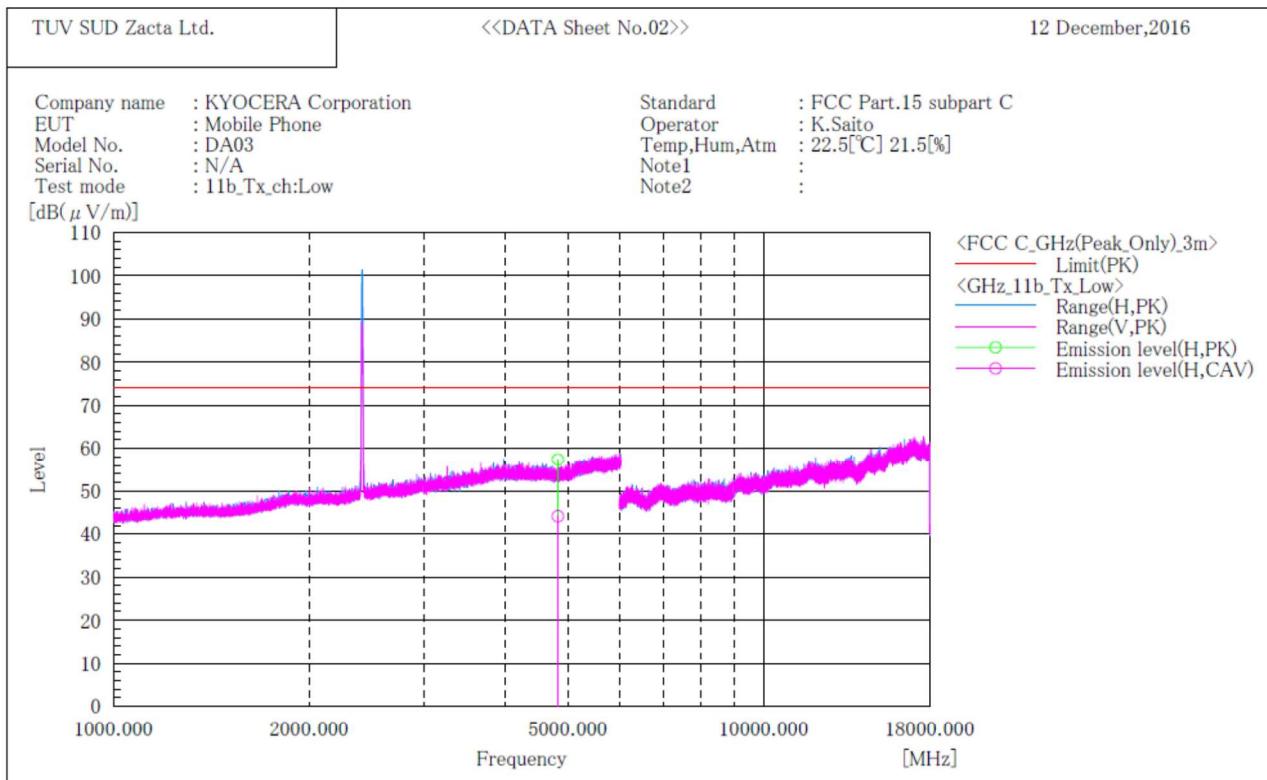

Final Result


No.	Frequency (P) [MHz]	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	4824.000	H 49.1	35.8	8.3	57.4	44.1	74.0	16.6	9.9	107.0	48.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

**[11b]**  
**Channel Middle**  
**BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

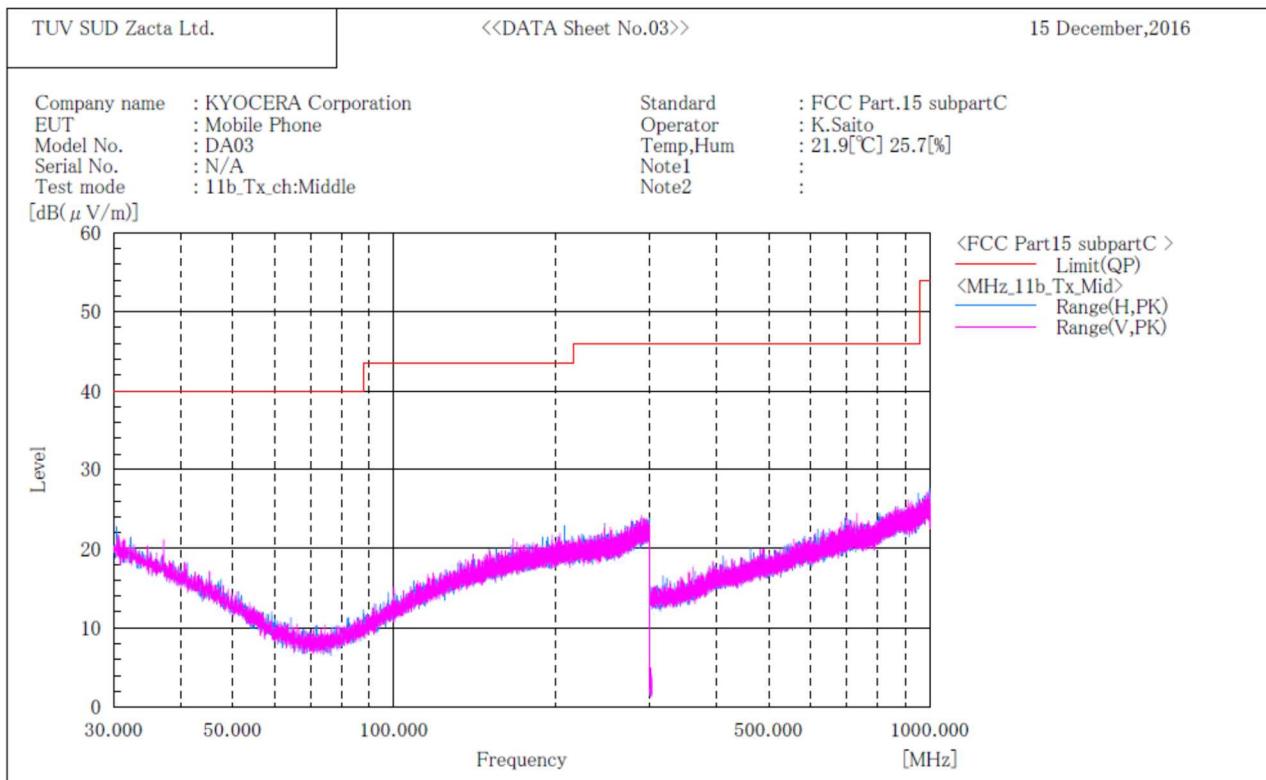

Final Result


No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11b]**  
**Channel Middle**  
**ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

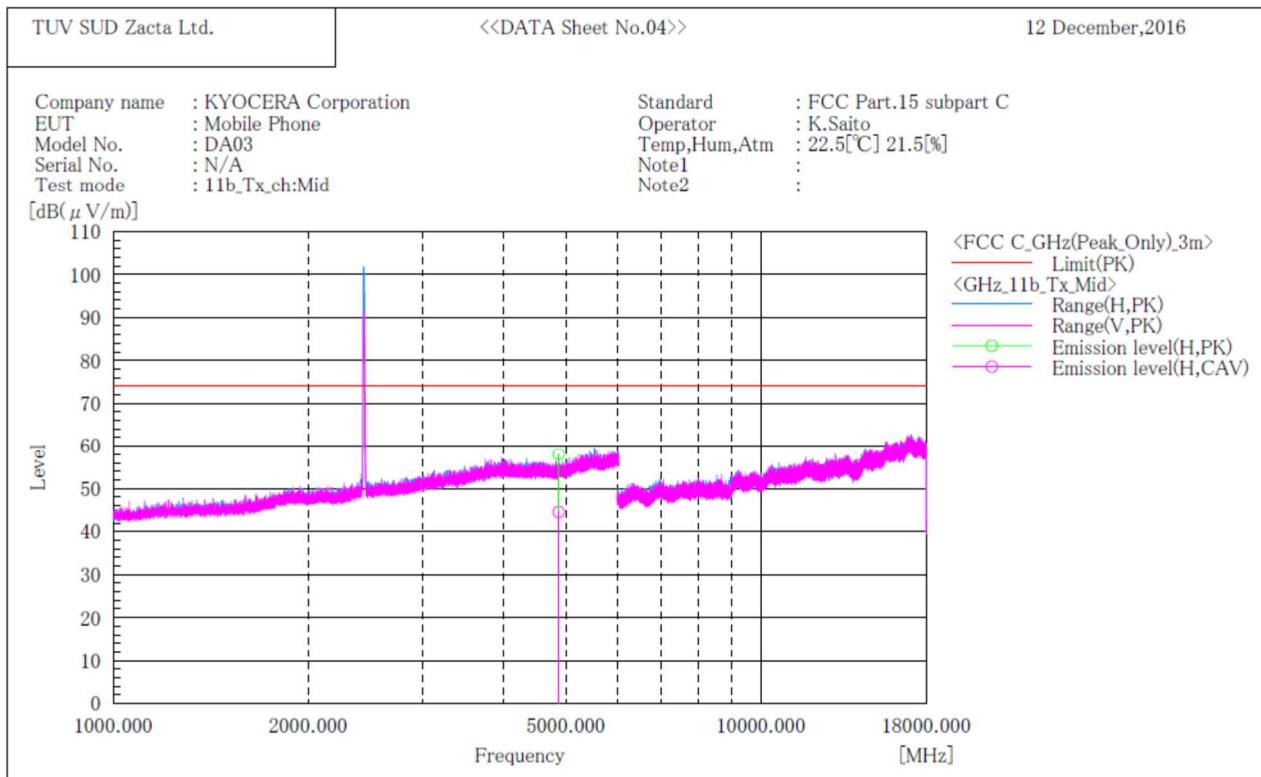

Final Result

No.	Frequency [MHz]	(P) PK	Reading PK [dB( $\mu$ V) ]	Reading CAV [dB( $\mu$ V) ]	c. f [dB( $\mu$ V) ]	Result PK [dB(1/m) ]	Result CAV [dB( $\mu$ V/m) ]	Limit PK [dB( $\mu$ V/m) ]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	4874.000	H	49.4	35.9	8.6	58.0	44.5	74.0	16.0	9.5	120.0	54.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11b]  
Channel High  
BELOW 1GHz

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

TUV SUD Zacta Ltd.		<<DATA Sheet No.05>>		15 December,2016	
Company name	: KYOCERA Corporation	Standard	: FCC Part.15 subpartC		
EUT	: Mobile Phone	Operator	: K.Saito		
Model No.	: DA03	Temp,Hum	: 21.9[°C] 25.7[%]		
Serial No.	: N/A	Note1	: :		
Test mode	: 11b_Tx_ch:High	Note2	: :		
[dB(μV/m)]					

Level [dB(μV/m)]

Frequency [MHz]

<FCC Part15 subpartC >

Limit(QP)

<MHz\_11b\_Tx\_High>

Range(H,PK)

Range(V,PK)

## Final Result


No.	Frequency (P)	c. f	Height	Angle	Remark
	[MHz]		[dB(1/m)]	[cm]	[°]

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
  2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11b]**  
**Channel High**  
**ABOVE 1GHZ**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

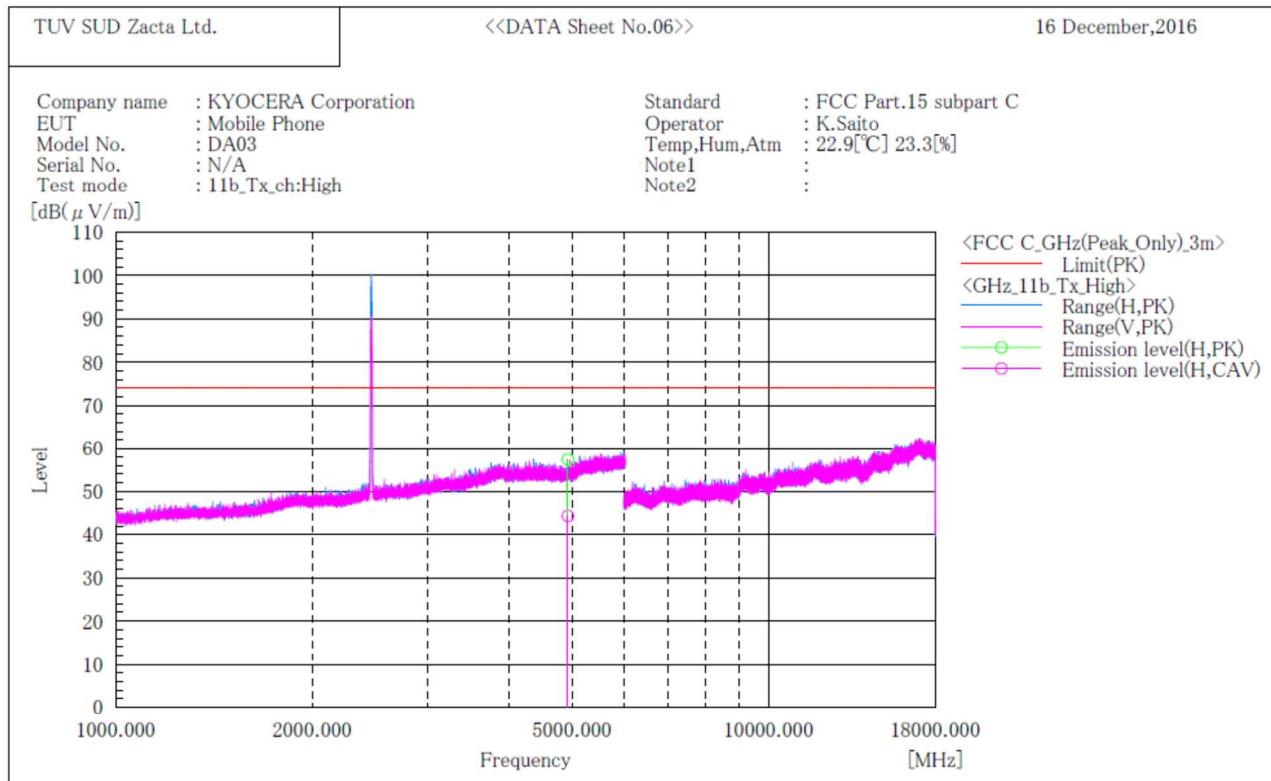

Final Result


No.	Frequency [MHz]	(P) PK [dB( $\mu$ V)]	Reading CAV [dB( $\mu$ V)]	c. f [dB(1/m)]	Result PK [dB( $\mu$ V/m)]	Result CAV [dB( $\mu$ V/m)]	Limit PK [dB( $\mu$ V/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	4924.000	H 48.6	35.5	8.8	57.4	44.3	74.0	16.6	9.7	139.0	46.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

**[11g]**  
**Channel Low**  
**BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

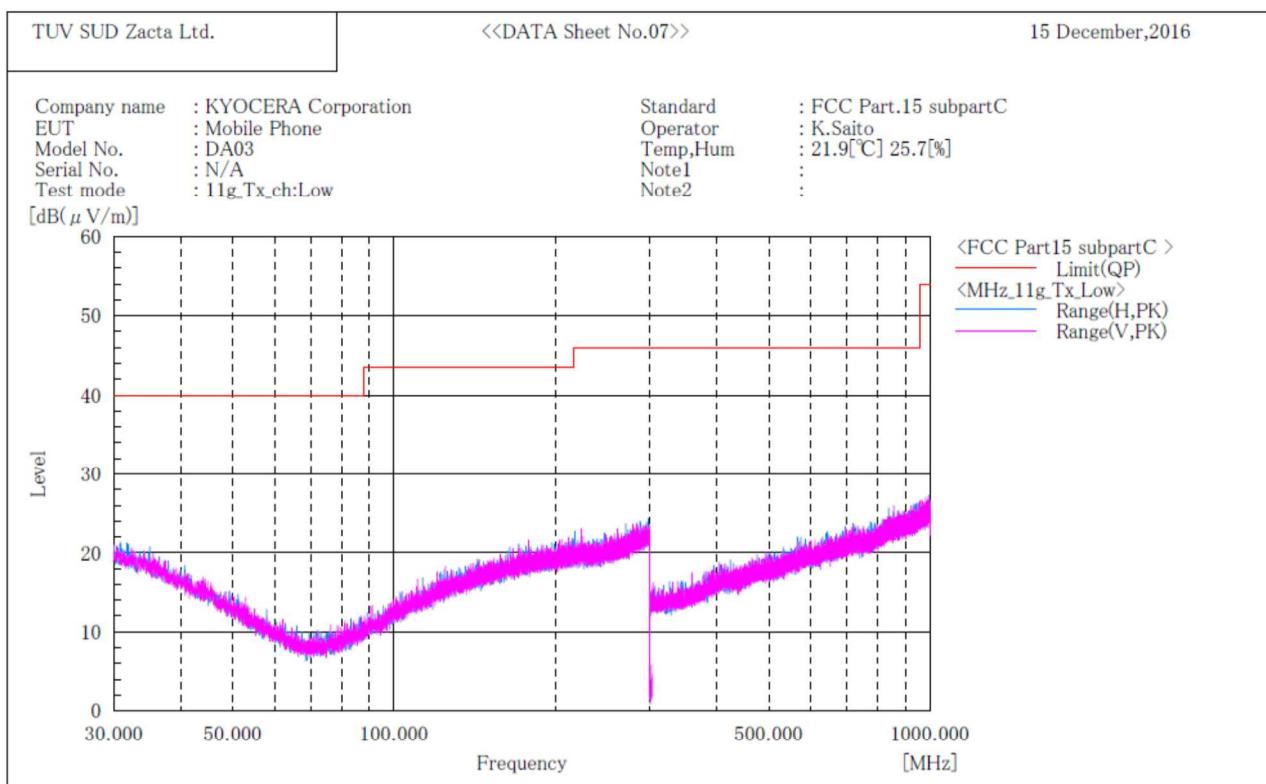

Final Result


No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11g]**  
**Channel Low**  
**ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

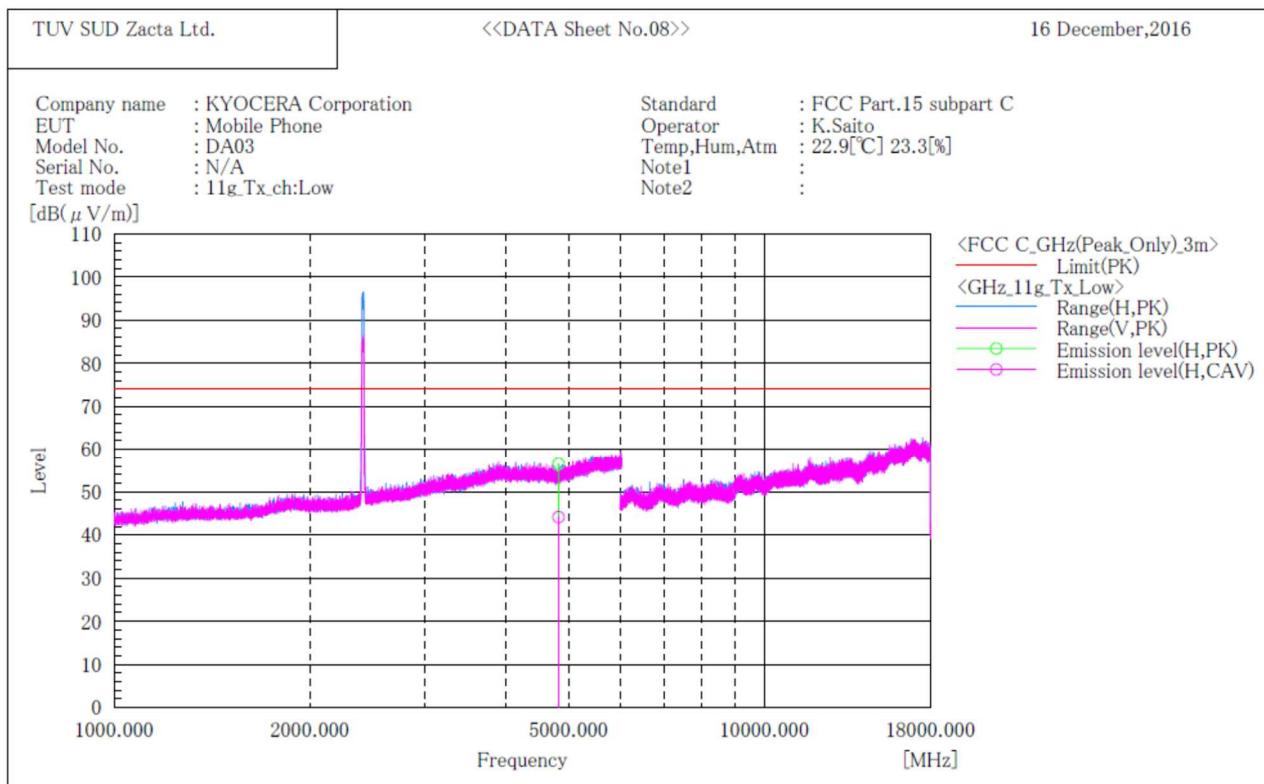

Final Result

No.	Frequency [MHz]	(P) H	Reading PK [dB( $\mu$ V) ]	Reading CAV [dB( $\mu$ V) ]	c. f 8.3	Result PK [dB(1/m) ]	Result CAV [dB( $\mu$ V/m) ]	Limit PK [dB( $\mu$ V/m) ]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	4824.000	H	48.2	35.8	8.3	56.5	44.1	74.0	17.5	-44.1	140.0	60.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp) ]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11g]  
Channel Middle  
BELOW 1GHz

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

TUV SUD Zacta Ltd.	<<DATA Sheet No.09>>		15 December,2016
Company name : KYOCERA Corporation	Standard : FCC Part.15 subpartC		
EUT : Mobile Phone	Operator : K.Saito		
Model No. : DA03	Temp,Hum : 21.9[°C] 25.7[%]		
Serial No. : N/A	Note1 :		
Test mode : 11g.Tx_ch:Middle	Note2 :		
[dB(μV/m)]			

Level

Frequency [MHz]

<FCC Part15 subpartC >

Limit(QP)

Range(H,PK)

Range(V,PK)

## Final Result


No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
  2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11g]**  
**Channel Middle**  
**ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

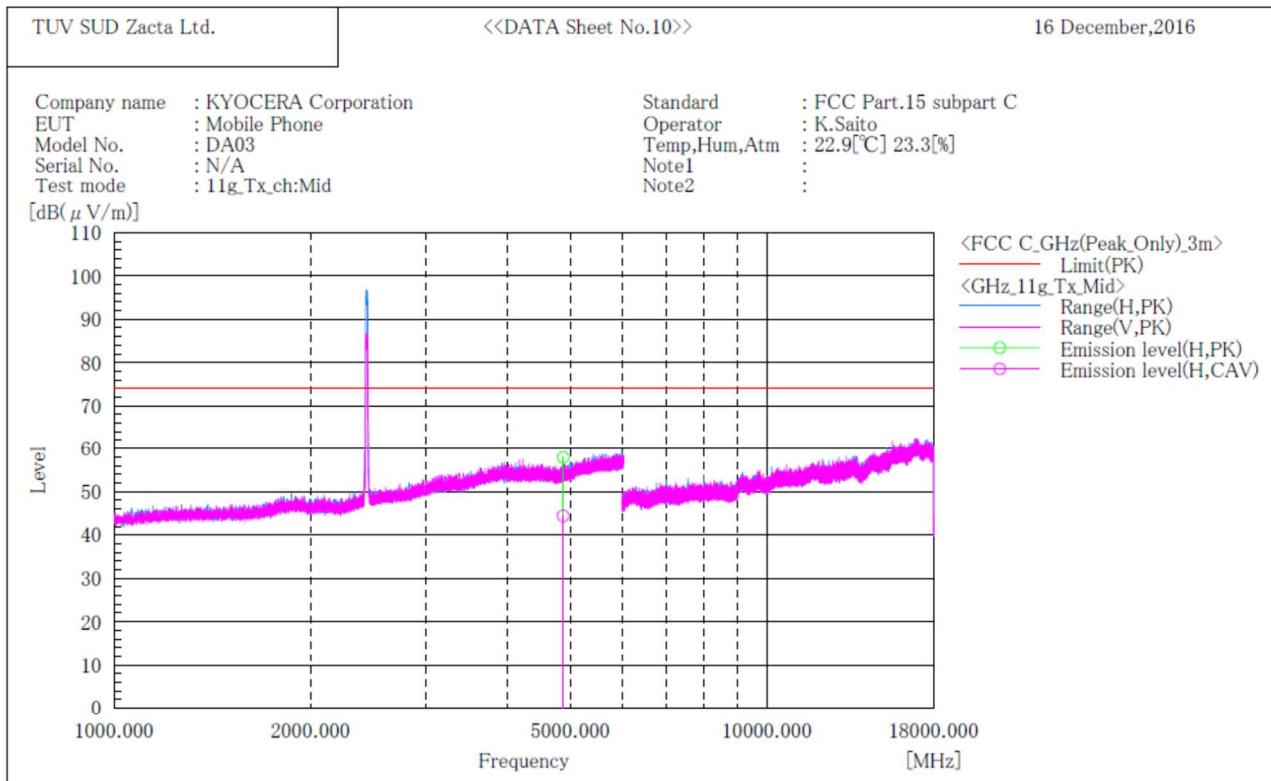

## Final Result


No.	Frequency [MHz]	(P) PK	Reading [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	4874.000	H	49.3	35.8	8.6	57.9	44.4	74.0	16.1	9.6	153.0	49.0	

## Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

**[11g]**  
**Channel High**  
**BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

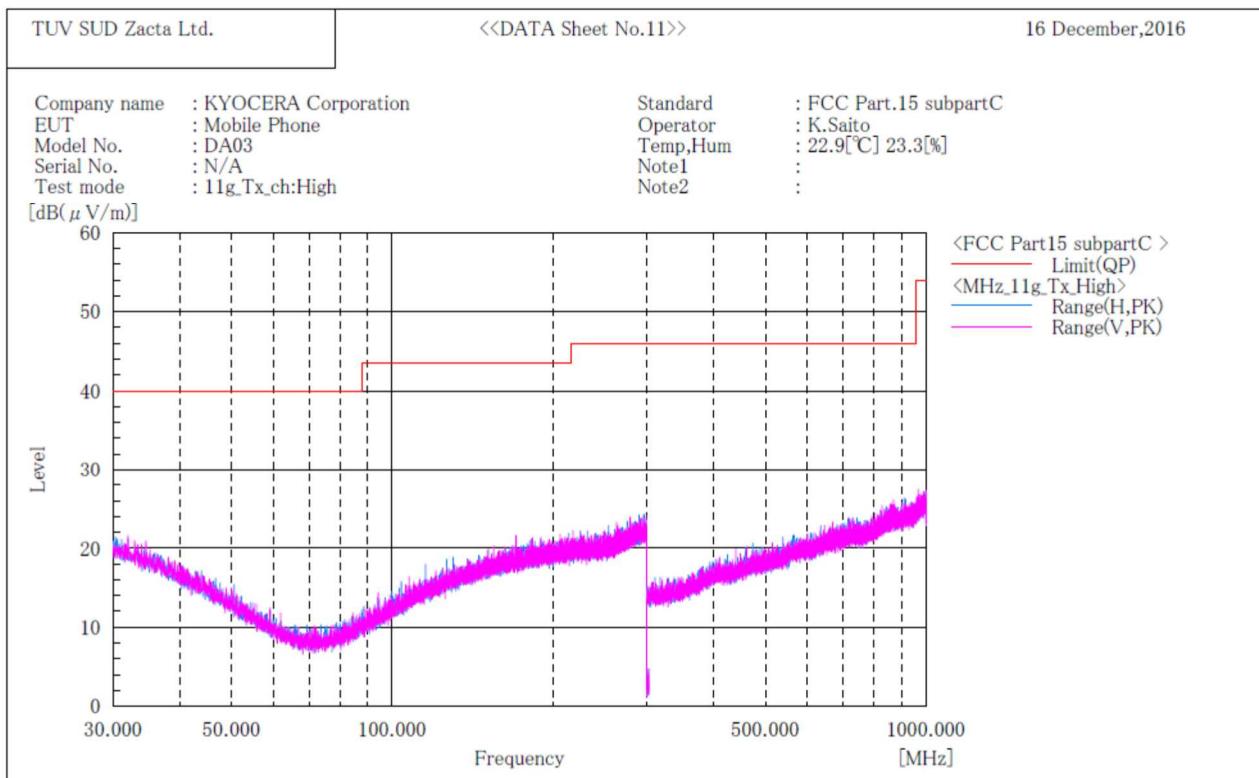

Final Result


No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11g]**  
**Channel High**  
**ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

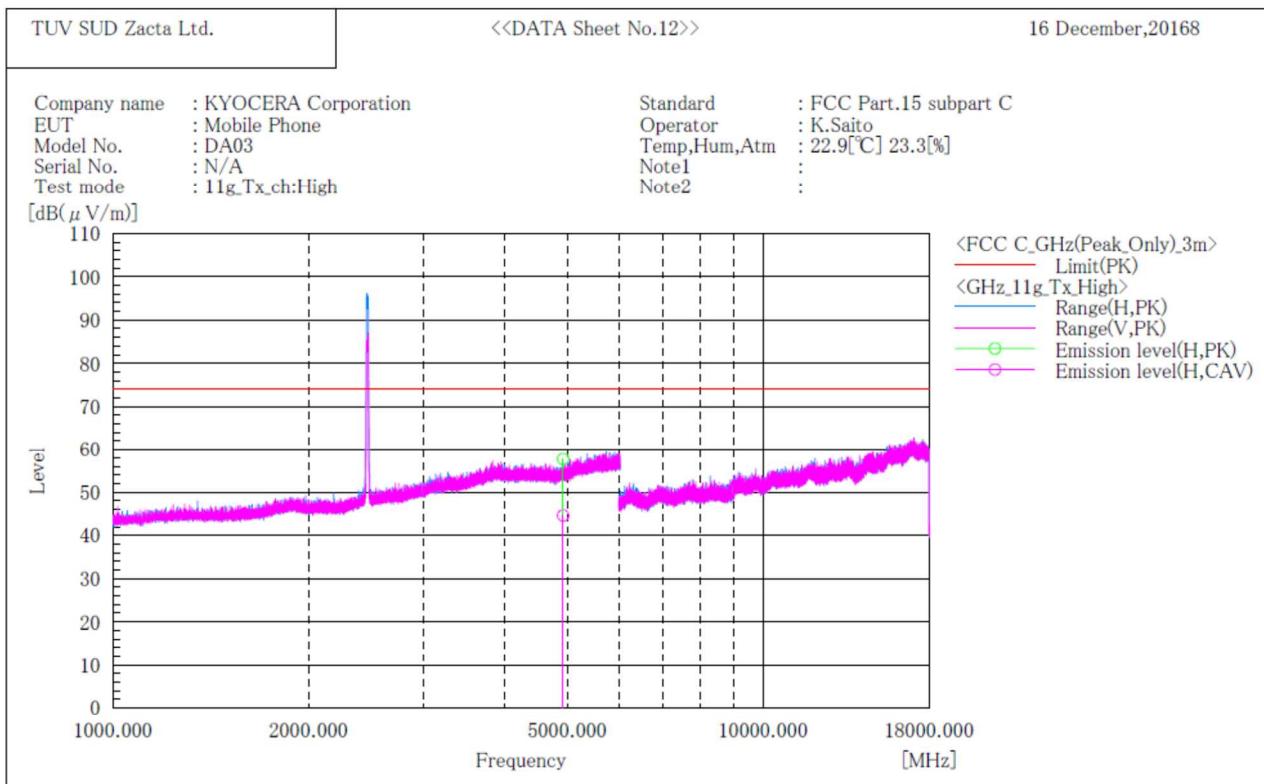

Final Result


No.	Frequency [MHz]	(P) H	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	4924.000	H	48.9	35.8	8.8	57.7	44.6	74.0	16.3	9.4	146.0	67.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

**[11n(HT20)]**  
**Channel Low**  
**BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

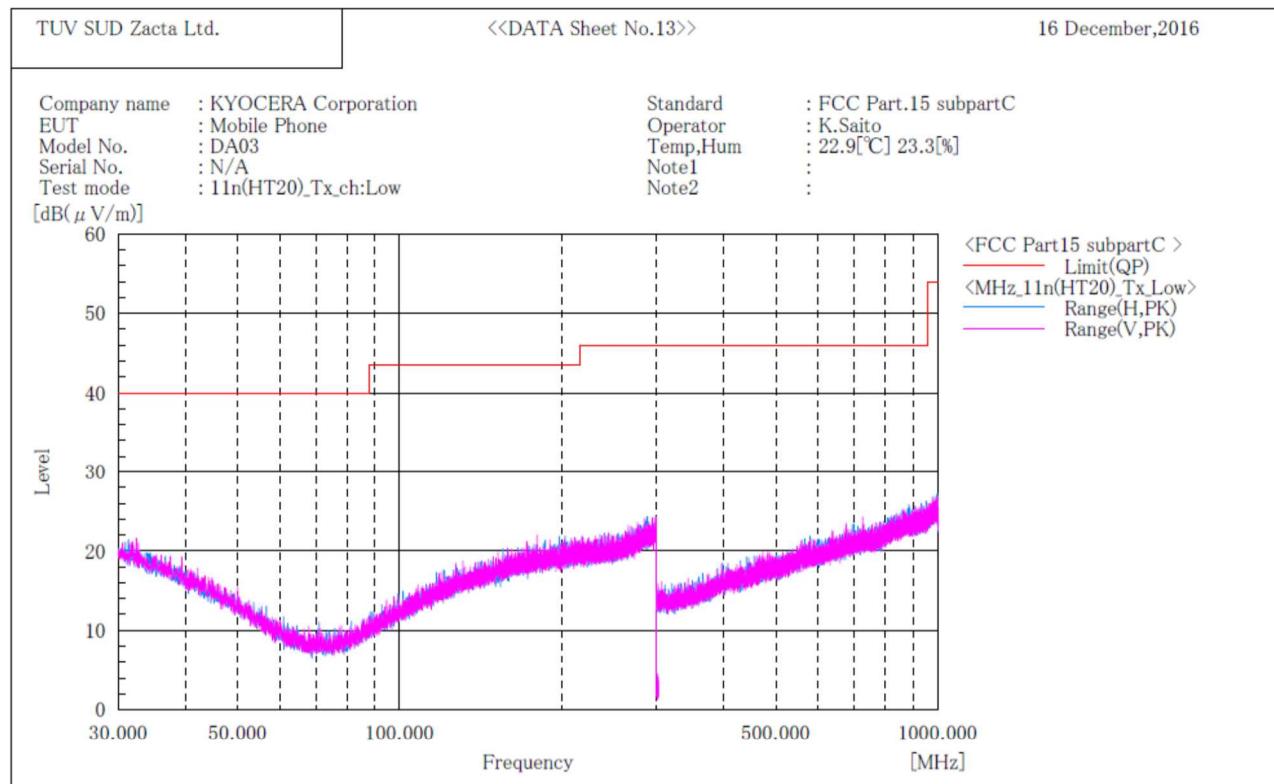

Final Result


No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11n(HT20)]**  
**Channel Low**  
**ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

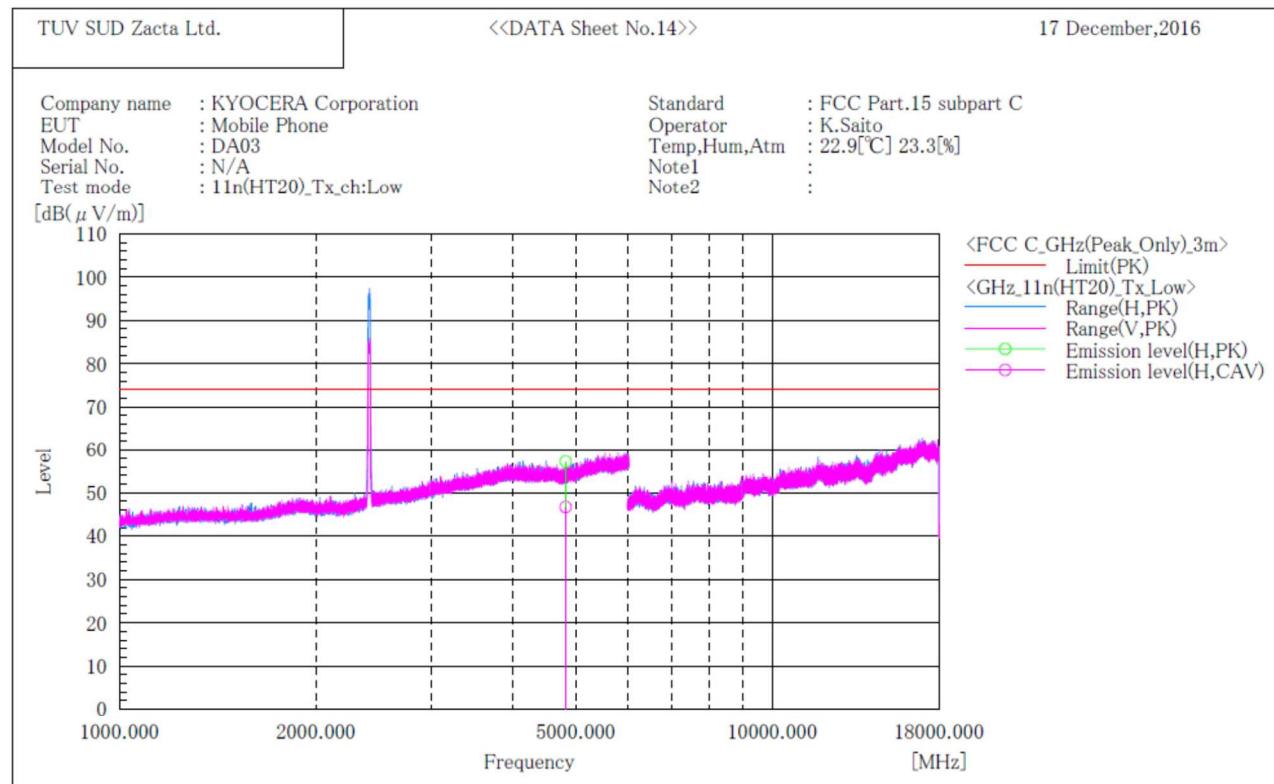

## Final Result


No.	Frequency [MHz]	(P) PK [dB( $\mu$ V)]	Reading CAV [dB( $\mu$ V)]	c. f [dB(1/m)]	Result PK [dB( $\mu$ V/m)]	Result CAV [dB( $\mu$ V/m)]	Limit PK [dB]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	4824.000	H 48.9	38.4	8.3	57.2	46.7	74.0	16.8	7.3	154.0	68.0	

## Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

**[11n(HT20)]**  
**Channel Middle**  
**BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

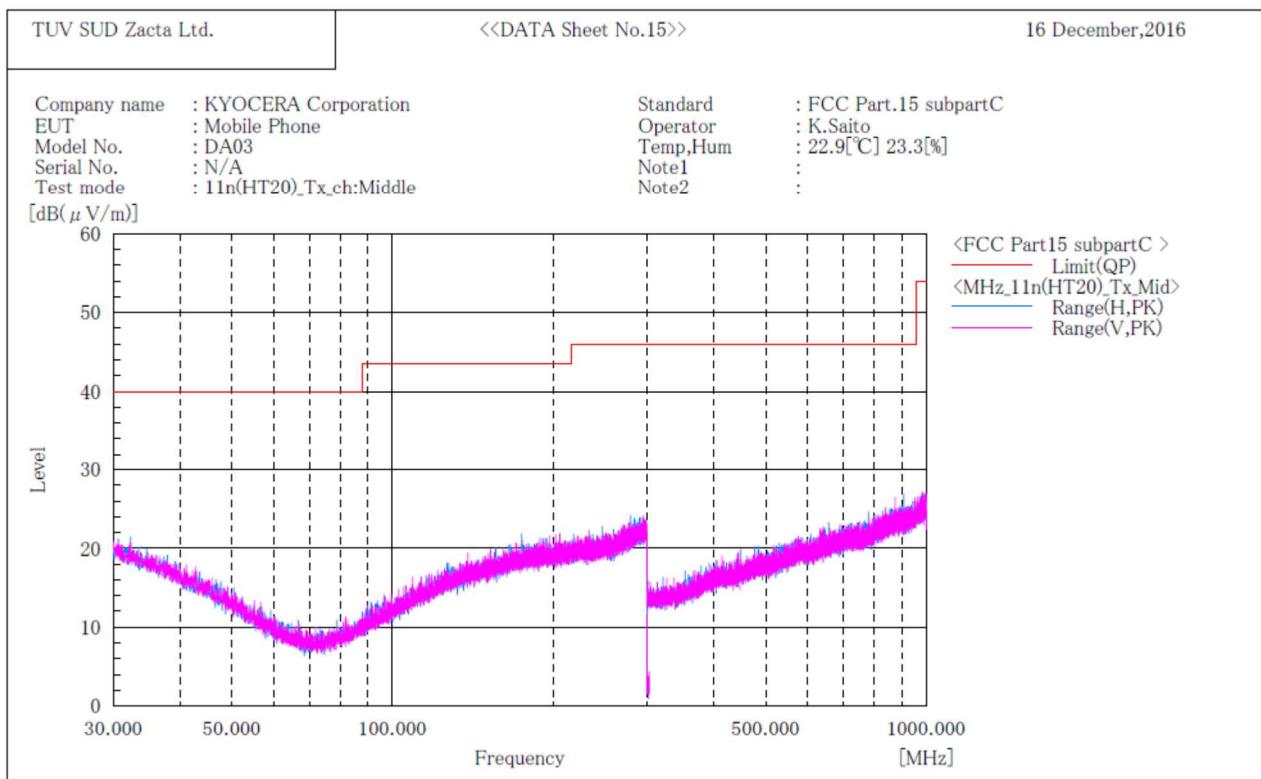

Final Result


No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11n(HT20)]**  
**Channel Middle**  
**ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

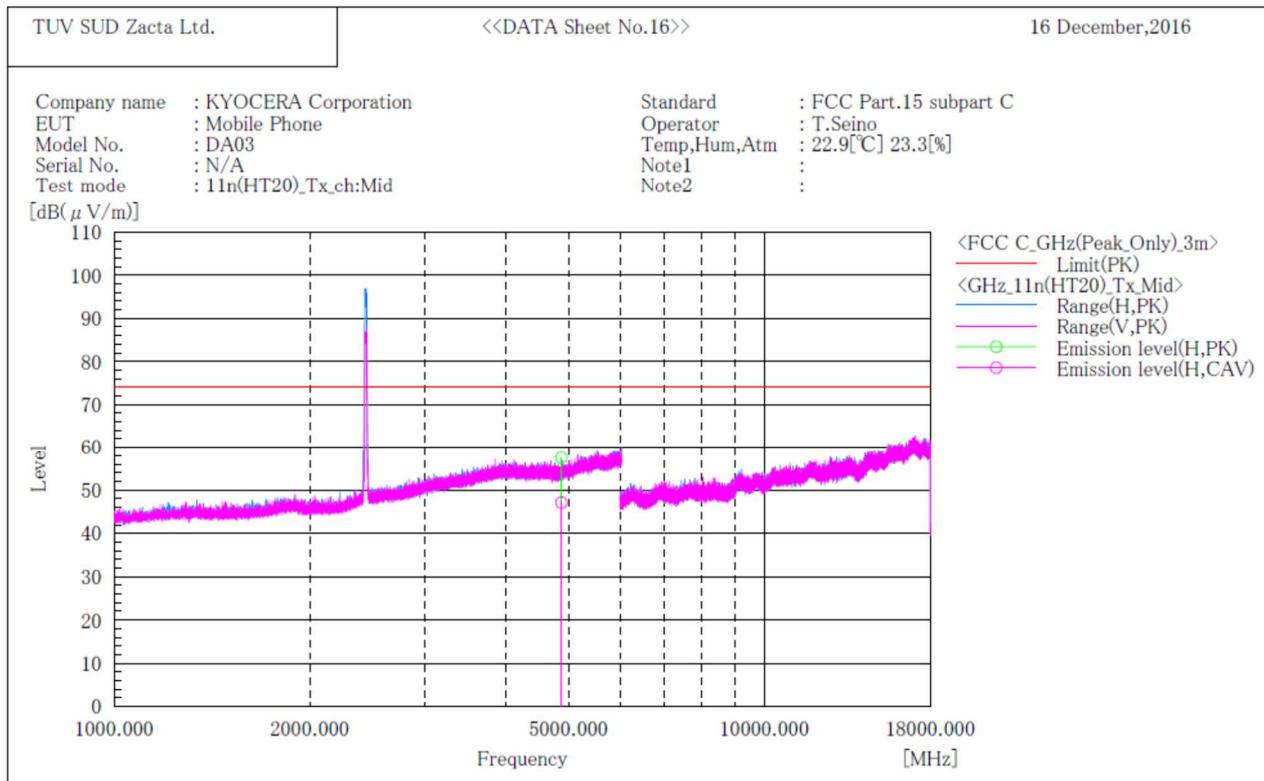

## Final Result


No.	Frequency [MHz]	(P) H	Reading PK [dB( $\mu$ V)]	Reading CAV [dB( $\mu$ V)]	c. f 8.6	Result PK [dB(1/m)]	Result CAV [dB( $\mu$ V/m)]	Limit PK [dB( $\mu$ V/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	4874.000	H	48.9	38.5	8.6	57.5	47.1	74.0	16.5	6.9	134.0	112.0	

## Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

**[11n(HT20)]**  
**Channel High**  
**BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

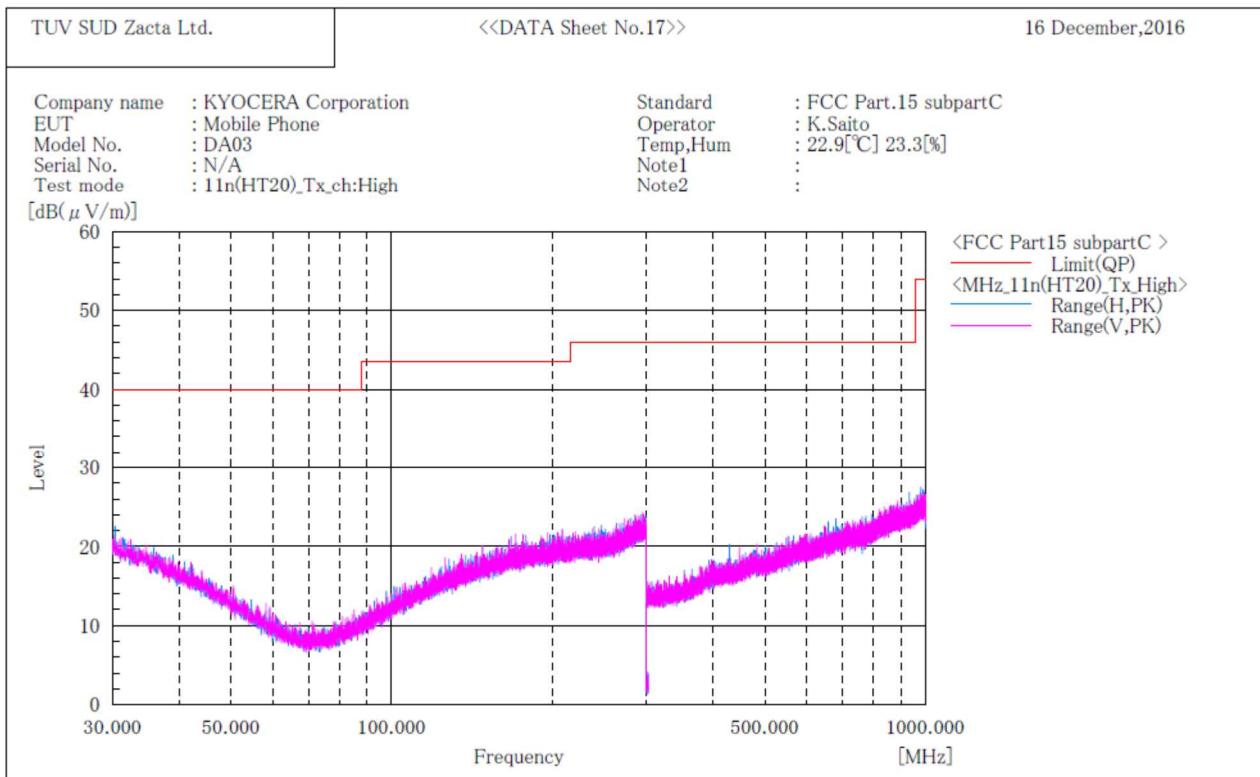

Final Result


No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11n(HT20)]**  
**Channel High**  
**ABOVE 1GHZ**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

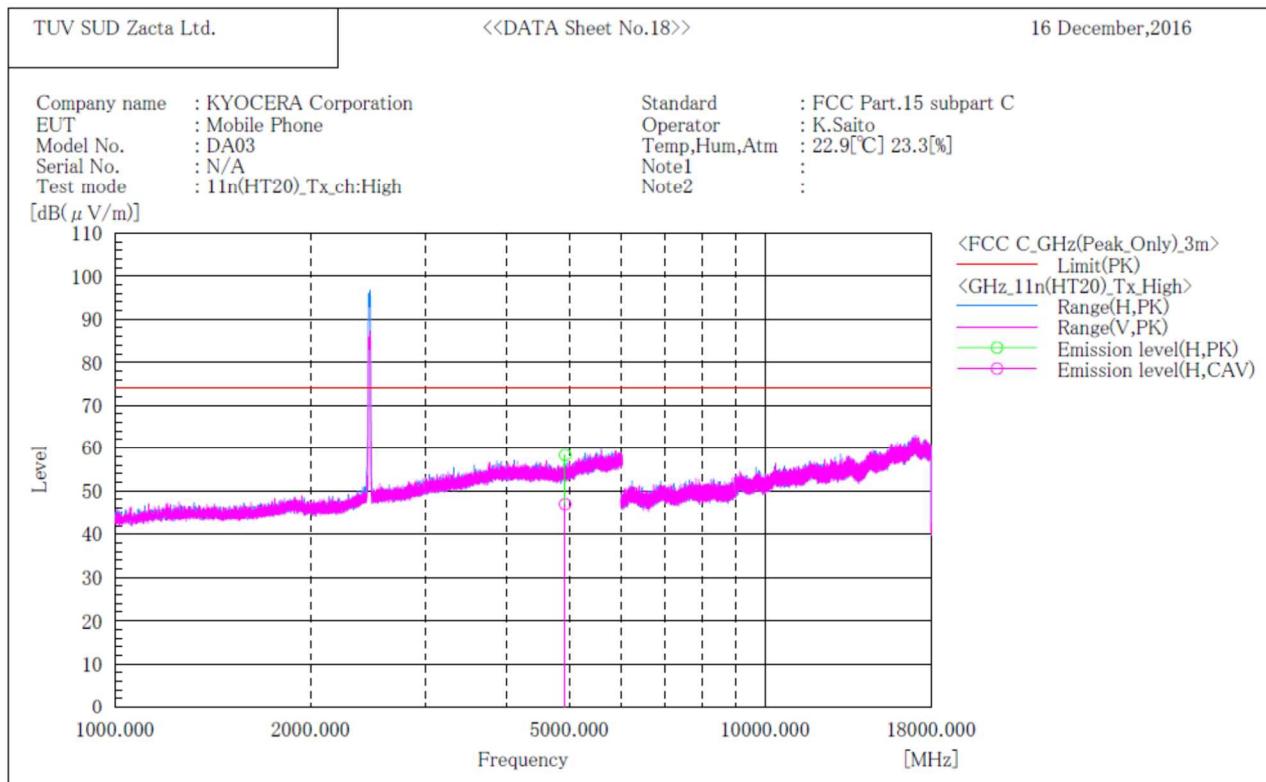

Final Result

No.	Frequency [MHz]	(P) H	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	4924.000	H	49.5	38.1	8.8	58.3	46.9	74.0	15.7	7.1	147.0	54.0	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

### 11.4.2 Receive mode

#### Channel Low BELOW 1GHz

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

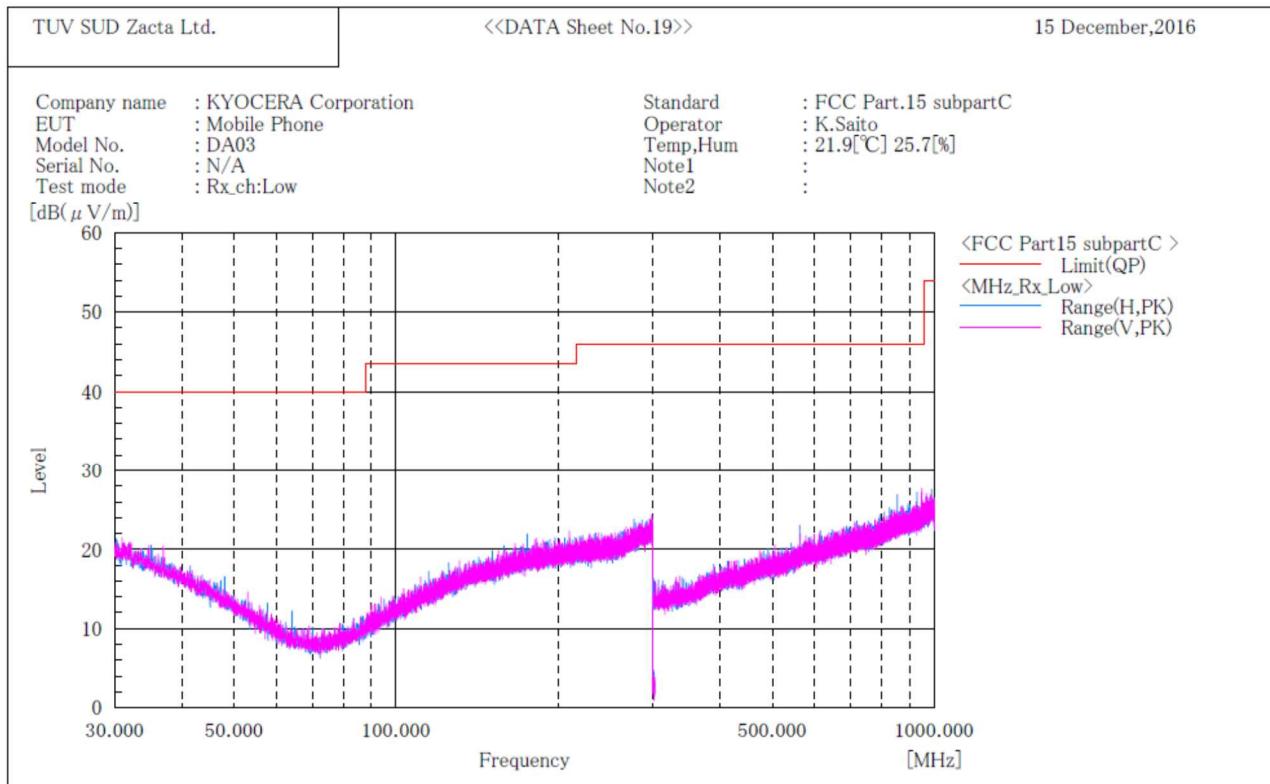


#### Final Result

No.	Frequency (P)	c. f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

#### Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz and 1GHz to 25GHz at the 3 meters distance.

**Channel Middle  
BELOW 1GHz**

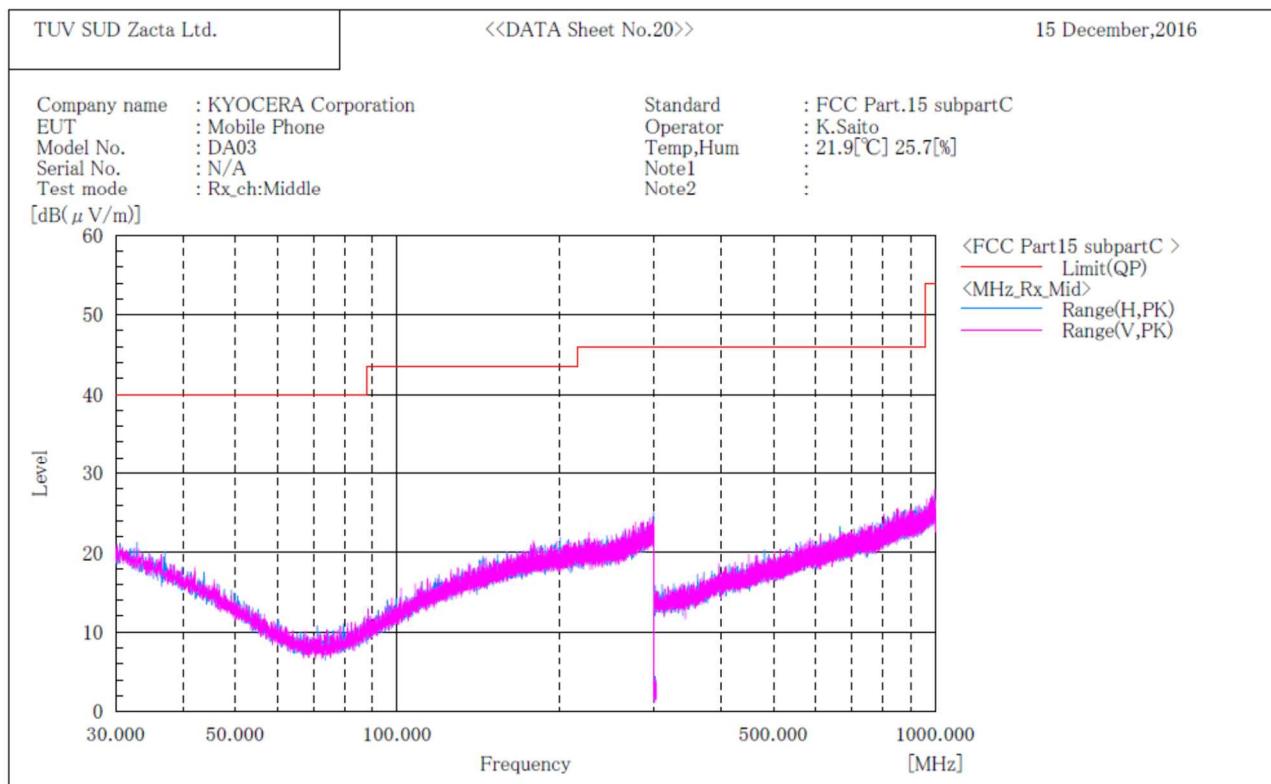
\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*
  
[ 3m Semi-anechoic chamber ]

**Final Result**

No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz and 1GHz to 25GHz at the 3 meters distance.

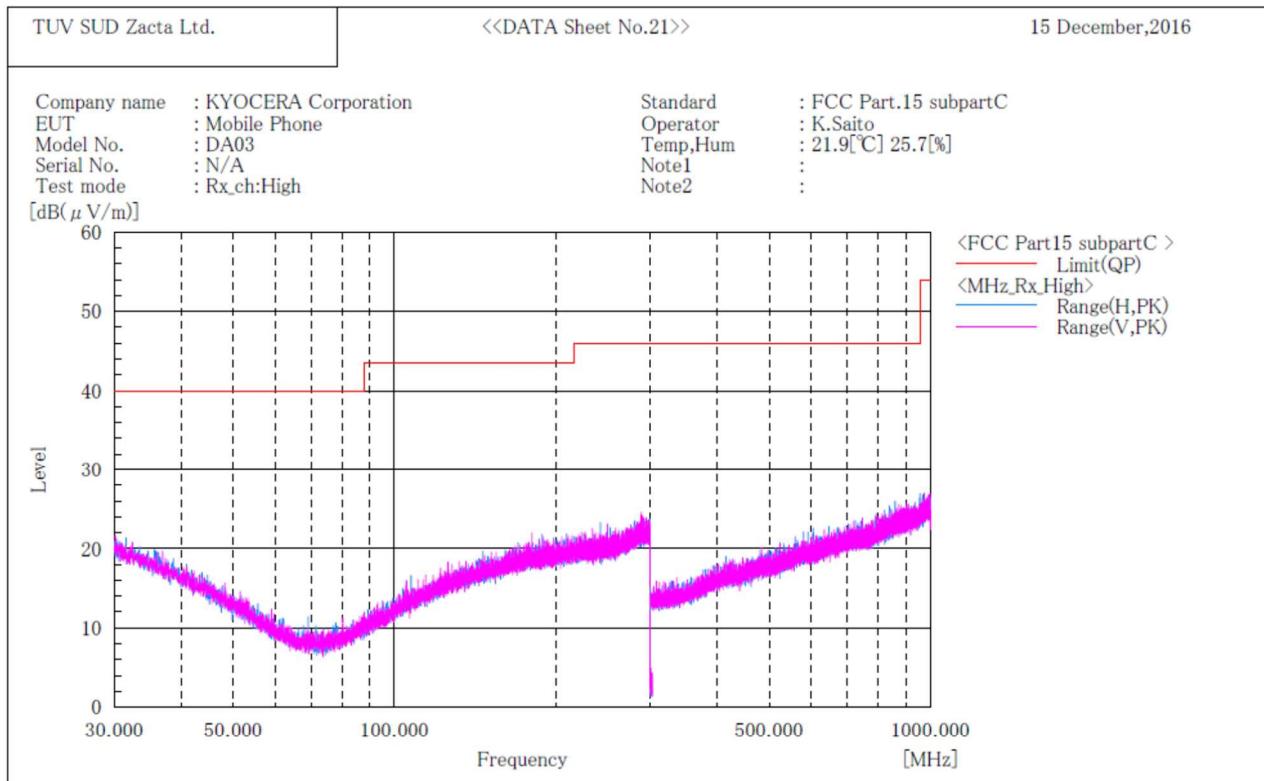**Channel High  
BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

**Final Result**

No.	Frequency (P) [MHz]	c. f [dB(1/m)]	Height [cm]	Angle [°]	Remark
-----	------------------------	-------------------	----------------	--------------	--------

**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz and 1GHz to 25GHz at the 3 meters distance.

## 9. Restricted Band of Operation

### 9.1 Measurement procedure

[FCC 15.247(d), 15.205, 15.209, KDB 558074 D01 v03r05, Section 12.0]

Test was applied by following conditions.

Test method	:	ANSI C63.10
Test place	:	3m Semi-anechoic chamber
EUT was placed on	:	Styrofoam table / (W)1.0m × (D)1.0m × (H)0.8m (below 1GHz) Styrofoam table / (W)0.6m × (D)0.6m ×(H)1.5m (above 1GHz)
Antenna distance	:	3m
Spectrum analyzer setting	:	
- Peak	:	RBW=1MHz, VBW=3MHz, Span=Arbitrary setting, Sweep=auto
- Average	:	RBW=1MHz, VBW=10Hz, Span=Arbitrary setting, Sweep=auto Display mode=Linear

#### Average Measurement Setting [VBW]

Mode	Duty Cycle (%)	T <sub>on</sub> (us)	T <sub>off</sub> (us)	Determined VBW Setting
IEEE802.11b	99.22	1024	8	10Hz (Duty Cycle $\geq$ 98%)
IEEE802.11g	99.27	1362	10	10Hz (Duty Cycle $\geq$ 98%)
IEEE802.11n(HT20)	99.38	1276	8	10Hz (Duty Cycle $\geq$ 98%)


Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

Radiated emission measurements are performed at 3m distance with the broadband antenna (Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission.

The EUT is Placed on a turntable, which is 0.8m/1.5m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

- Test configuration

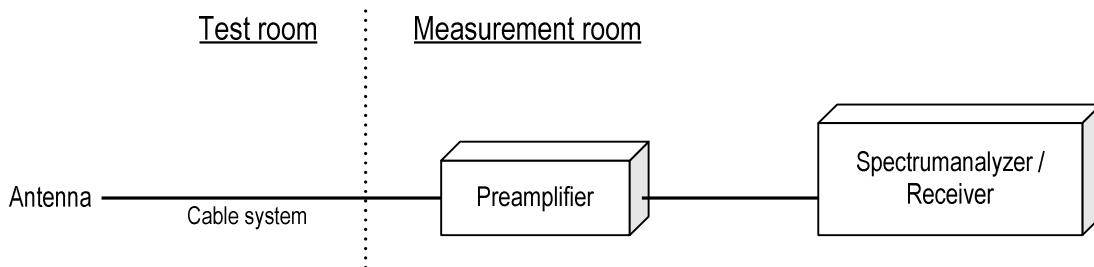

### 9.2 Limit

Emission at the boundary of the restricted band provided by 15.205 shall be lower than 15.209 limit.

### 9.3 Measurement Result

#### [IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]

Channel	Frequency [MHz]	Results Chart	Result
Low	2412	See the Trace Data	Pass
High	2462	See the Trace Data	Pass

### 9.4 Test data


Date : December 20, 2016  
 Temperature : 22.9 [°C]  
 Humidity : 23.3 [%]  
 Test place : 3m Semi-anechoic chamber

Test engineer :


Kazunori Saito

## [IEEE802.11b]

## Channel Low Horizontal Peak

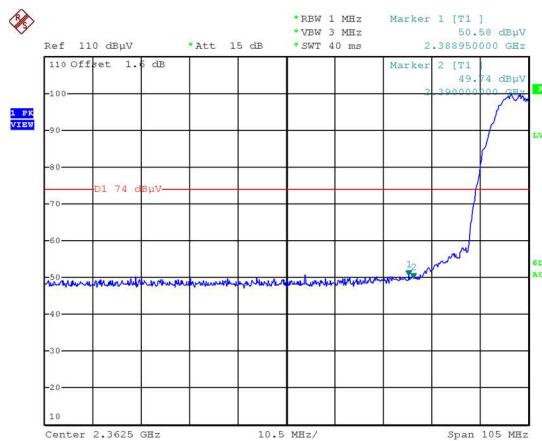


## Average

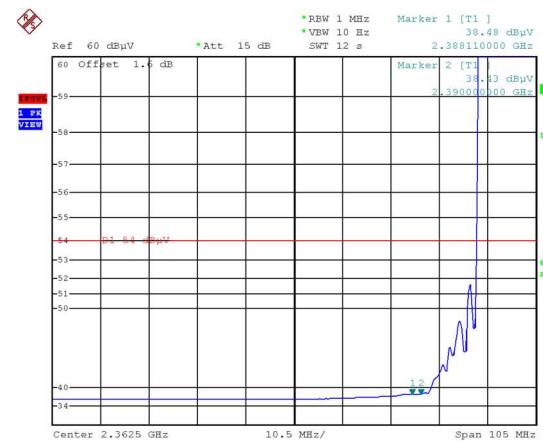


Date: 20.DEC.2016 23:04:22

Date: 20.DEC.2016 23:06:14

## Vertical Peak

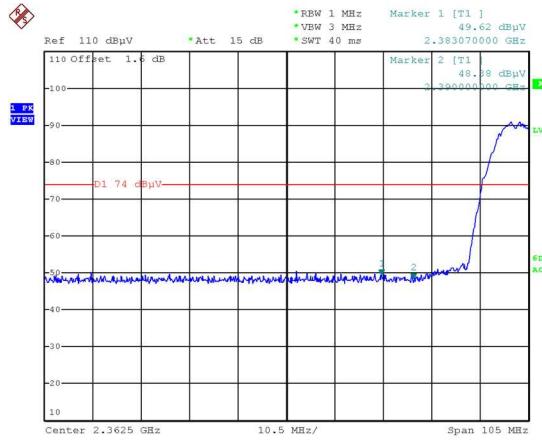


## Average

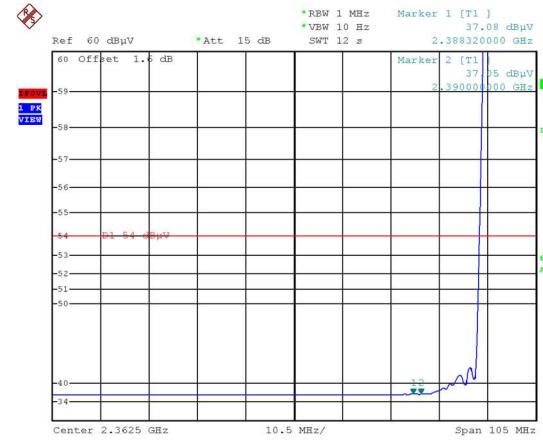

Date: 20.DEC.2016 23:11:13

Date: 20.DEC.2016 23:12:18

## Channel High Horizontal Peak

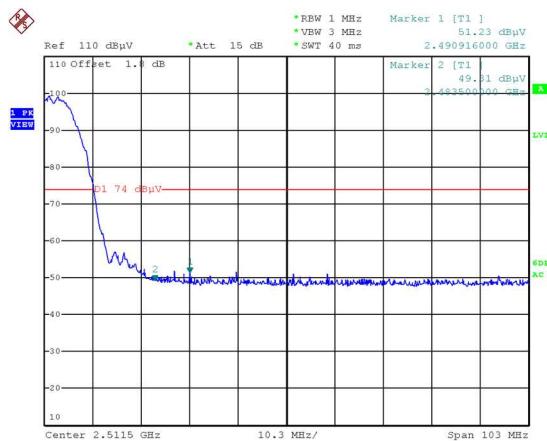


## Average




Date: 20.DEC.2016 23:17:59

Date: 20.DEC.2016 23:19:03

## Vertical Peak

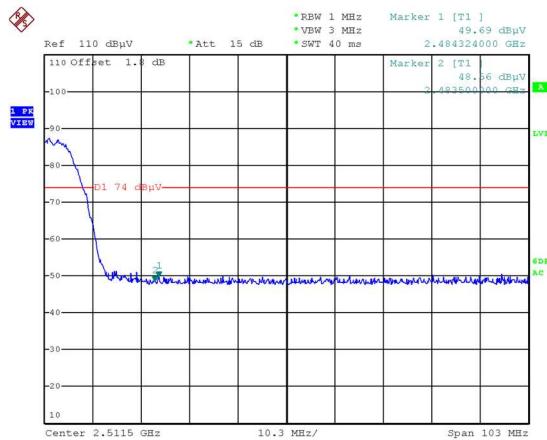

## Average

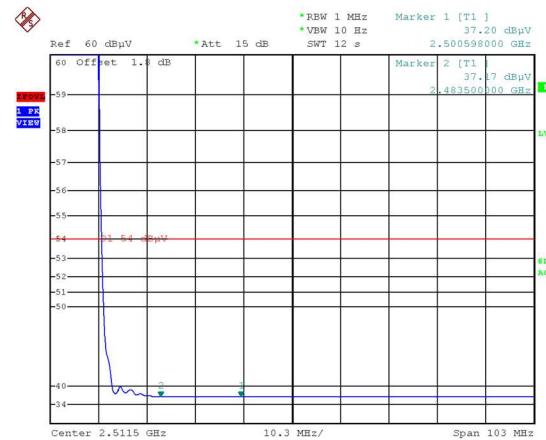


Date: 20.DEC.2016 23:21:54

Date: 20.DEC.2016 23:23:40

[IEEE802.11g]

## Channel Low Horizontal Peak

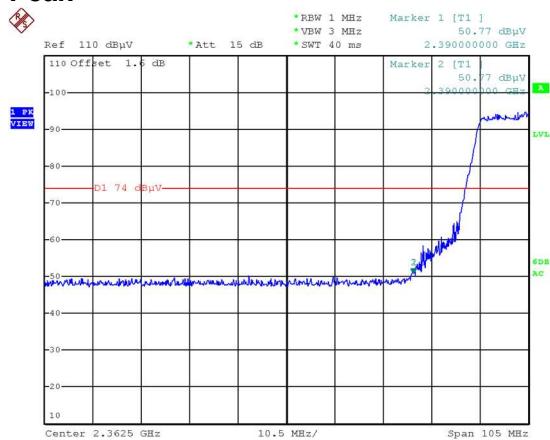


Date: 20.DEC.2016 23:35:26

## Average




Date: 20.DEC.2016 23:37:41

## Vertical Peak

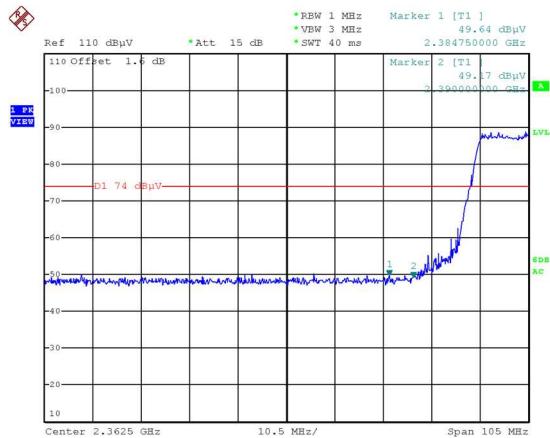


Date: 20.DEC.2016 23:40:22

## Average

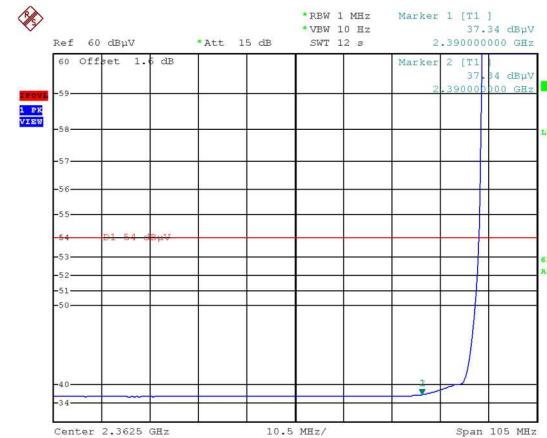


Date: 20.DEC.2016 23:41:17

## Channel High Horizontal Peak

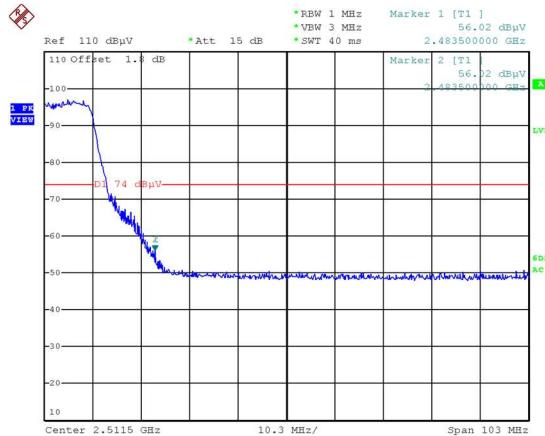


Date: 20.DEC.2016 23:47:22

## Average

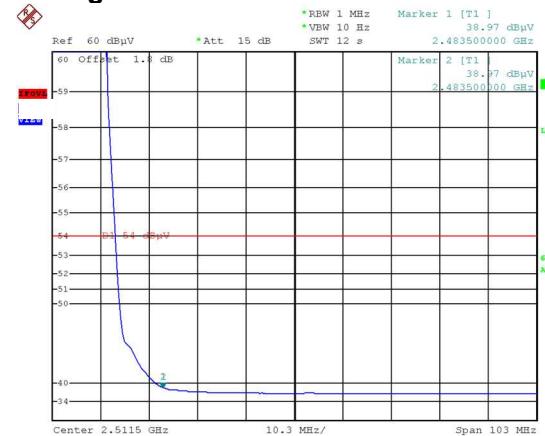


Date: 20.DEC.2016 23:48:12

## Vertical Peak

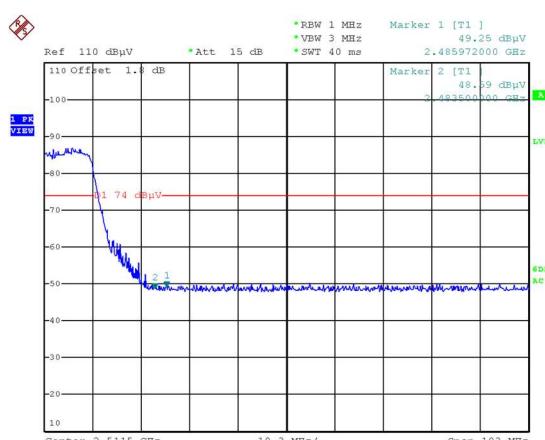

Date: 20.DEC.2016 23:51:29


## Average

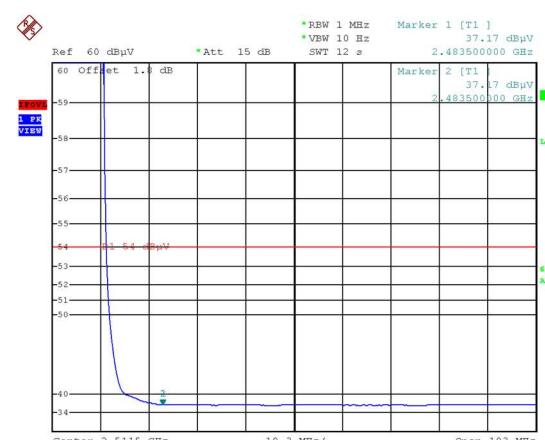

Date: 20.DEC.2016 23:52:25

## [IEEE802.11n (HT20)]

### Channel Low Horizontal Peak

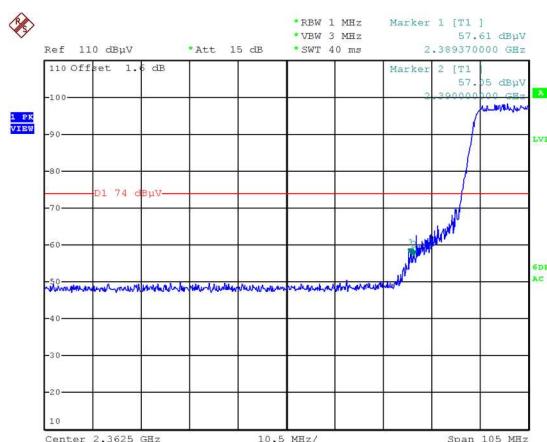


Date: 21.DEC.2016 00:05:22

### Average




Date: 21.DEC.2016 00:06:16

### Vertical Peak

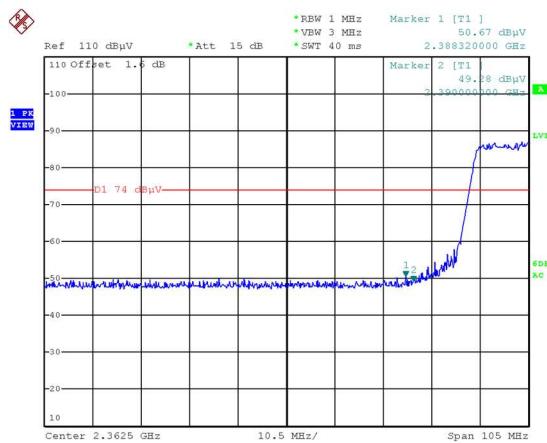


Date: 21.DEC.2016 00:09:04

### Average

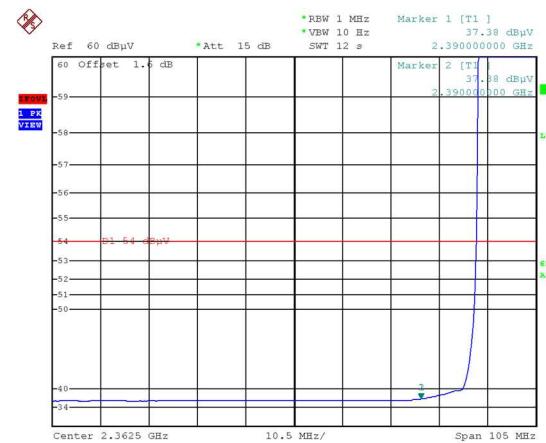


Date: 21.DEC.2016 00:09:43

## Channel High Horizontal Peak

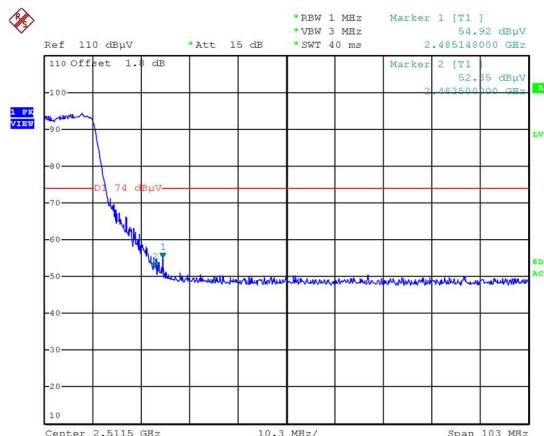


Date: 21.DEC.2016 00:14:09

## Average

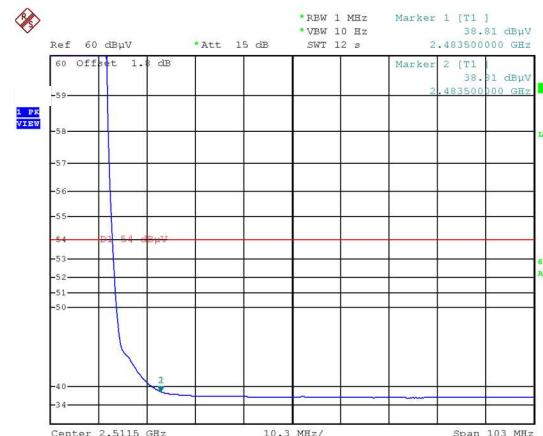


Date: 21.DEC.2016 00:15:20

## Vertical Peak

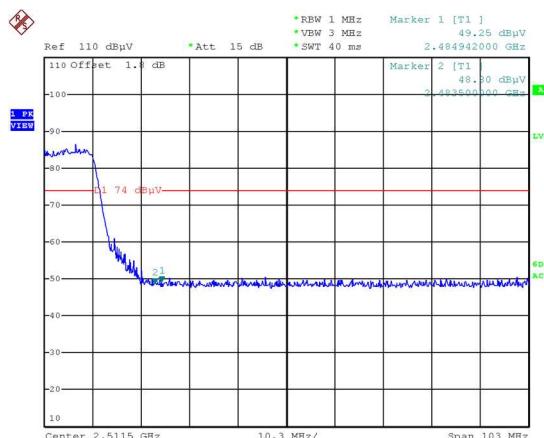

Date: 21.DEC.2016 00:18:23

## Average

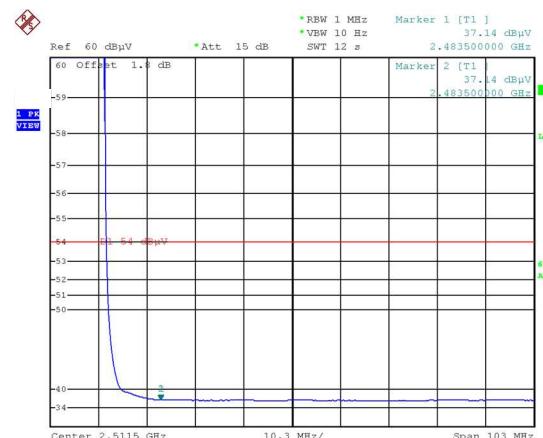

Date: 21.DEC.2016 00:19:03

## 10. Transmitter Power Spectral Density

### 10.1 Measurement procedure


[FCC 15.247(e), KDB 558074 D01 v03r05, Section 10.2]

The peak power is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = 1.5 times the 6 dB bandwidth.
- b) RBW = 3kHz - 100kHz.
- c) VBW  $\geq$  3 x RBW.
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

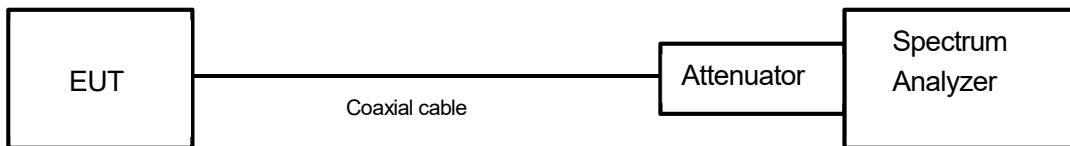

### 10.2 Limit

The peak power spectral density shall not be greater than 8dBm in any 3kHz band.

### 10.3 Measurement result

Date : October 31, 2016  
 Temperature : 20.6 [°C]  
 Humidity : 46.5 [%]  
 Test place : Shielded room No.4

Test engineer :

Kazunori Saito

## [IEEE802.11b]

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2412	-15.63	10.52	-5.11	8.00	13.11	PASS
Middle	2437	-15.78	10.52	-5.26	8.00	13.26	PASS
High	2462	-16.40	10.52	-5.88	8.00	13.88	PASS

Calculation;

$$\text{Transmitter Power Spectral Density Level (Margin)} = \text{Limit} - (\text{Reading} + \text{Factor})$$

## [IEEE802.11g]

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2412	-23.27	10.52	-12.75	8.00	20.75	PASS
Middle	2437	-22.83	10.52	-12.31	8.00	20.31	PASS
High	2462	-22.91	10.52	-12.39	8.00	20.39	PASS

Calculation;

$$\text{Transmitter Power Spectral Density Level (Margin)} = \text{Limit} - (\text{Reading} + \text{Factor})$$

## [IEEE802.11n (HT20)]

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2412	-23.13	10.52	-12.61	8.00	20.61	PASS
Middle	2437	-23.83	10.52	-13.31	8.00	21.31	PASS
High	2462	-24.15	10.52	-13.63	8.00	21.63	PASS

Calculation;

$$\text{Transmitter Power Spectral Density Level (Margin)} = \text{Limit} - (\text{Reading} + \text{Factor})$$



## 10.4 Trace data [IEEE802.11b]

## Channel Low



## Channel Middle




## Channel High




[IEEE802.11g]


## Channel Low

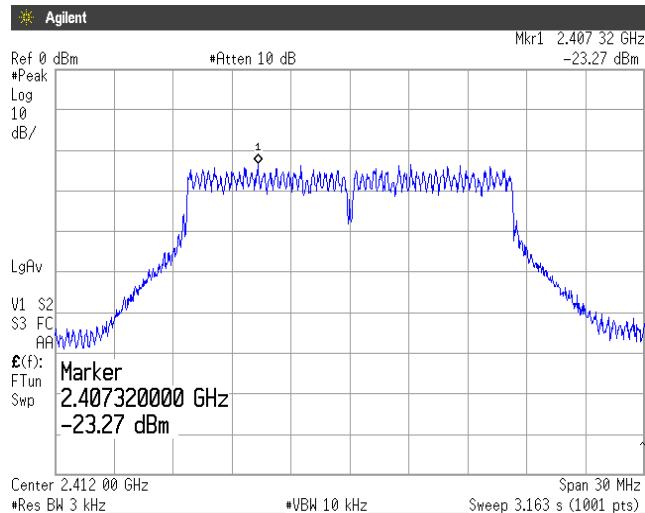

## Channel Middle

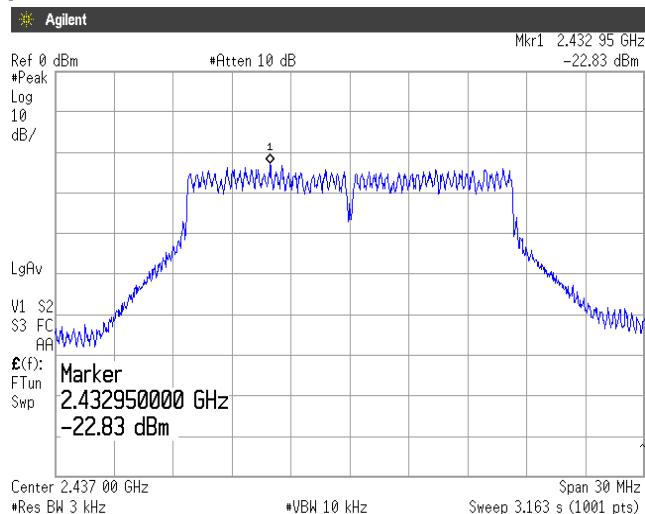

## Channel High

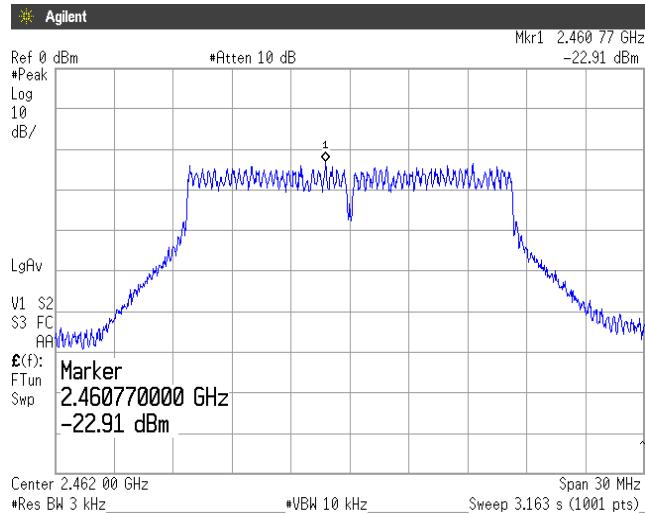





Zacta

## [IEEE802.11n (HT20)]


## Channel Low

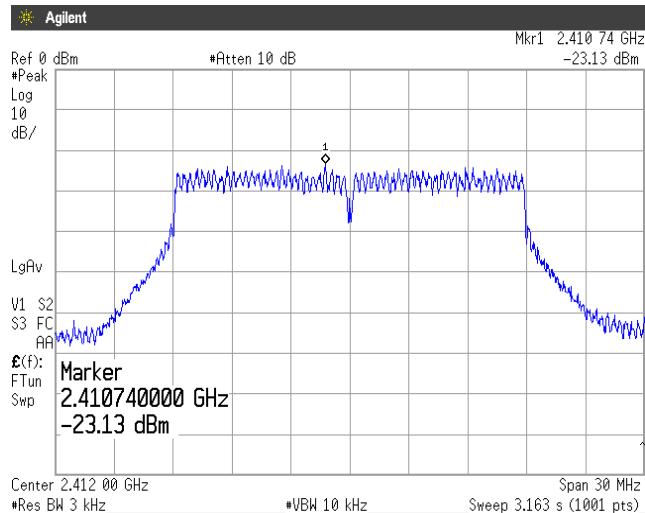

## Channel Middle

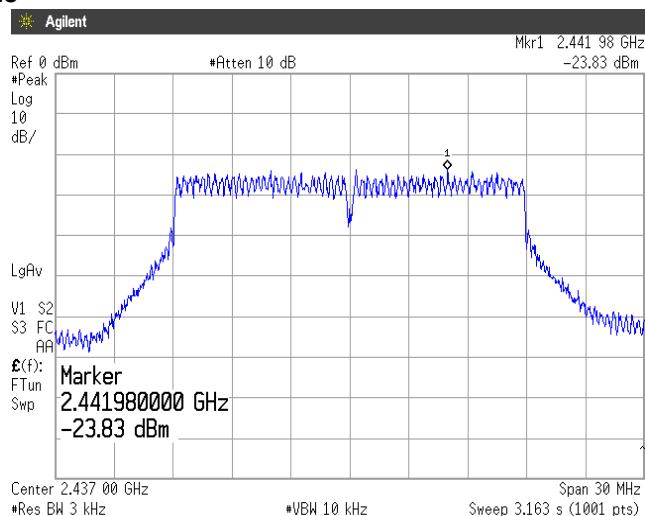

## Channel High

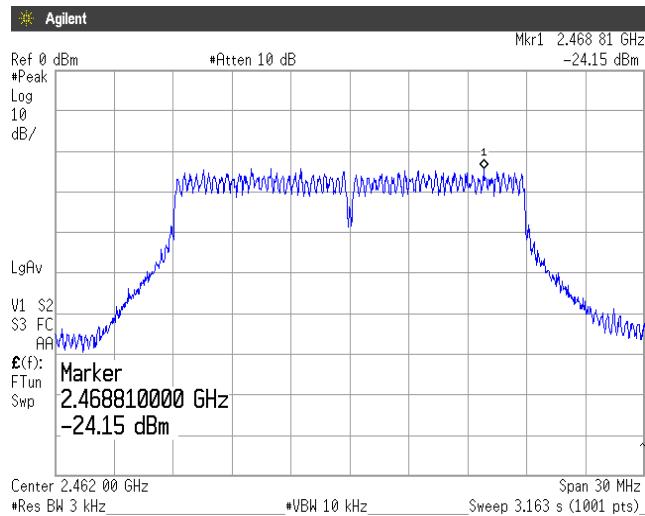

## 11. AC Power Line Conducted Emissions

### 11.1 Measurement procedure [FCC 15.207]

Test was applied by following conditions.


Test method	:	ANSI C63.10
Frequency range	:	0.15MHz to 30MHz
Test place	:	3m Semi-anechoic chamber
EUT was placed on	:	FRP table / (W)2.0m × (D)1.0m × (H)0.8m
Vertical Metal Reference Plane	:	(W)2.0m × (H)2.0m 0.4m away from EUT
Test receiver setting		
- Detector	:	Quasi-peak, Average
- Bandwidth	:	9kHz

EUT and peripherals are connected to  $50\Omega/50\mu\text{H}$  Line Impedance Stabilization Network (LISN) which are connected to reference ground plane, and are placed 80cm away from EUT. Excess of AC power cable is bundled in center.

LISN for peripheral is terminated in  $50\Omega$ .

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Maximum emission configuration is determined by manipulating the EUT, peripherals, interconnecting cables. Then, emission measurements are performed with test receiver in above setting to each current-carrying conductor of the mains port. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits.

#### - Test configuration

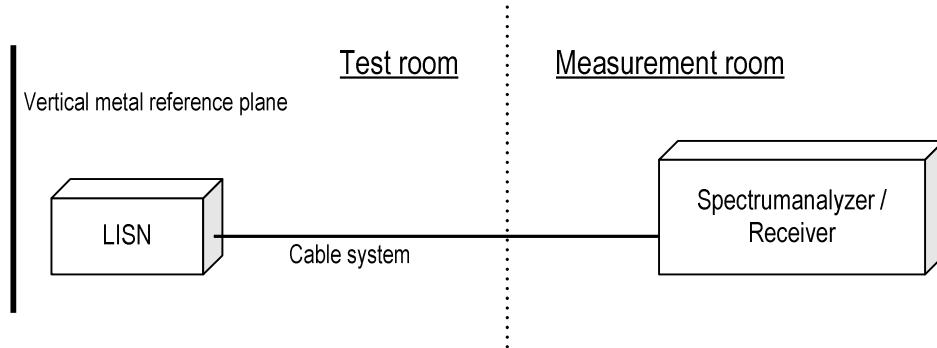

### 11.2 Calculation method

Emission level = Reading + (LISN. factor + Cable system loss)

Margin = Limit – Emission level

Example:

Limit @ 0.403MHz : 57.8dB $\mu$ V(Quasi-peak)  
: 47.8dB $\mu$ V(Average)

(Quasi peak) Reading = 22.7dB $\mu$ V c.f = 10.4dB

Emission level = 22.7 + 10.4 = 33.1dB $\mu$ V

Margin = 57.8 – 33.1 = 24.7dB

(Average) Reading = 6.5dB $\mu$ V c.f = 10.4dB

Emission level = 6.5 + 10.4 = 16.9dB $\mu$ V

Margin = 47.8 – 16.9 = 30.9dB


### 11.3 Limit

Frequency [MHz]	Limit	
	QP [dBuV]	AV [dBuV]
0.15-0.5	66-56*	56-46*
0.5-5	56	46
5-30	60	50

\*: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 11.4 Test data

\*\*\*\*\* CONDUCTED EMISSION at MAINS PORT \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

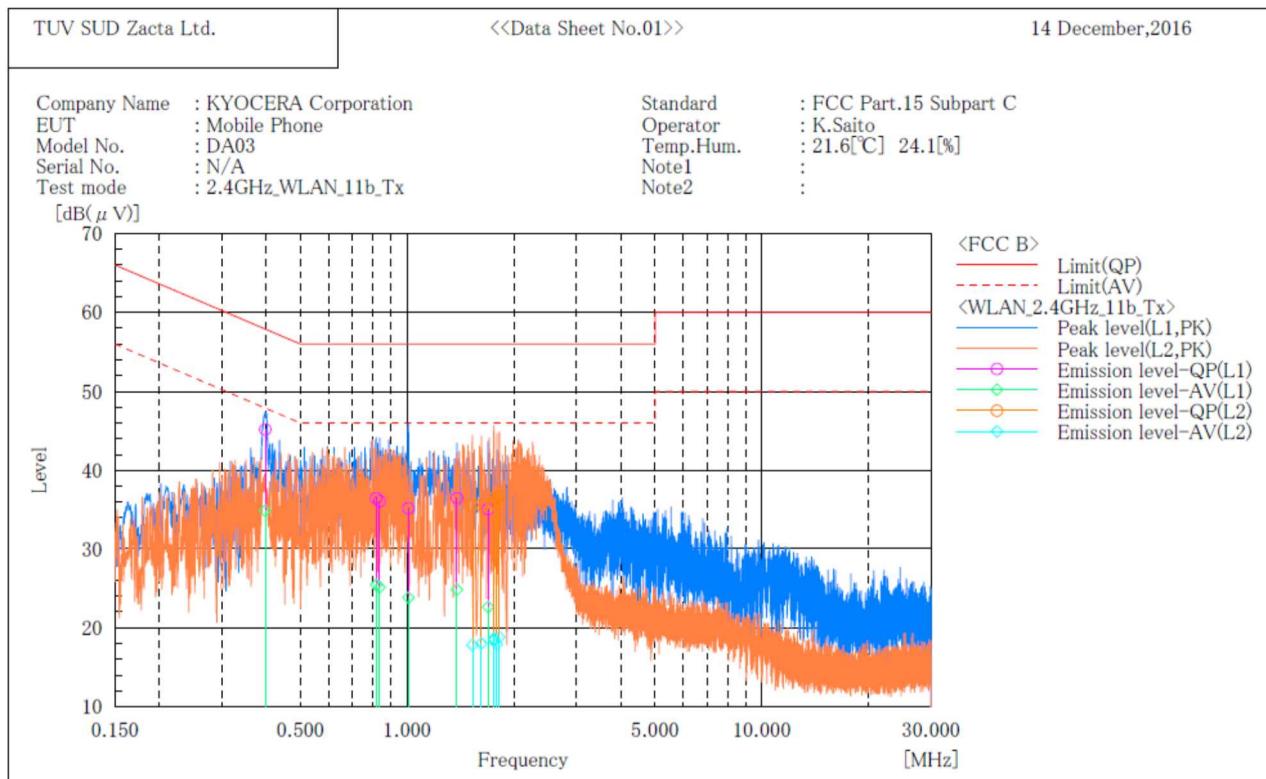

#### Final Result

--- L1 Phase ---												
No.	Frequency	Reading QP	Reading AV	c. f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Remark	
	[MHz]	[dB( $\mu$ V)]	[dB( $\mu$ V)]		[dB]	[dB( $\mu$ V)]	[dB( $\mu$ V)]	[dB( $\mu$ V)]	[dB]	[dB]		
1	0.398	34.9	24.5	10.3	45.2	34.8	57.9	47.9	12.7	13.1		
2	0.818	26.1	15.1	10.3	36.4	25.4	56.0	46.0	19.6	20.6		
3	0.836	25.7	14.8	10.3	36.0	25.1	56.0	46.0	20.0	20.9		
4	1.008	24.7	13.4	10.4	35.1	23.8	56.0	46.0	20.9	22.2		
5	1.381	26.0	14.4	10.4	36.4	24.8	56.0	46.0	19.6	21.2		
6	1.691	24.6	12.2	10.4	35.0	22.6	56.0	46.0	21.0	23.4		

--- L2 Phase ---												
No.	Frequency	Reading QP	Reading AV	c. f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Remark	
	[MHz]	[dB( $\mu$ V)]	[dB( $\mu$ V)]		[dB]	[dB( $\mu$ V)]	[dB( $\mu$ V)]	[dB( $\mu$ V)]	[dB]	[dB]		
1	1.527	25.1	7.4	10.4	35.5	17.8	56.0	46.0	20.5	28.2		
2	1.619	25.1	7.6	10.4	35.5	18.0	56.0	46.0	20.5	28.0		
3	1.756	25.5	8.2	10.4	35.9	18.6	56.0	46.0	20.1	27.4		
4	1.756	26.0	8.0	10.4	36.4	18.4	56.0	46.0	19.6	27.6		
5	1.790	25.9	7.5	10.4	36.3	17.9	56.0	46.0	19.7	28.1		
6	1.819	26.3	8.4	10.4	36.7	18.8	56.0	46.0	19.3	27.2		

## **12. Antenna requirement**

According to FCC section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The antenna is a special antenna mounted inside of the EUT. Therefore, the EUT complies with the antenna requirement of FCC section 15.203.

## 13. Uncertainty of measurement

Expanded uncertainties stated are calculated with a coverage Factor k=2.

Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028-0011 determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission at mains port	±3.0dB
Radiated emission (9kHz – 30MHz)	±4.4dB
Radiated emission (30MHz – 1000MHz)	±4.5dB
Radiated emission (1000MHz – 26GHz)	±3.9dB

## 14. Laboratory Information

---

### 1. Location

Name: Yonezawa Testing Center  
 Address: 5-4149-7, Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan  
 Phone: +81-238-28-2881  
 Fax: +81-238-28-2888

### 2. Accreditation and Registration

- 1) NVLAP  
LAB CODE: 200306-0
- 2) VLAC  
Accreditation No.: VLAC-013
- 3) BSMI  
Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018
- 4) FCC

Registration number	Expiration date
540072	2017-2-20

- 5) Industry Canada

Site number	Facility	Expiration date
4224A-4	3m Semi-anechoic chamber	2017-12-03
4224A-5	10m Semi-anechoic chamber No.1	2017-12-03
4224A-6	10m Semi-anechoic chamber No.2	2019-12-14

- 6) VCCI Council

Registration number	Expiration date
A-0166	2017-07-03

## Appendix A. Test equipment

### Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	Jul. 31, 2017	Jul. 15, 2016
Microwave cable	RS	YH-13S5	N/A(S403)	May 31, 2017	May 24, 2016
Attenuator	Weinschel	56-10	J4993	Nov. 30, 2016	Nov. 12, 2015
Attenuator	Weinschel	56-10	J4993	Nov. 30, 2017	Nov. 1, 2016
Microwave cable	SUHNER	SUCOFLEX104/1.5m	322087/4	Jul. 31, 2017	Jul. 20, 2016
Power meter	ROHDE&SCHWARZ	NRP2	103269	Jun. 30, 2017	Jun. 27, 2016
Power sensor	ROHDE&SCHWARZ	NRP-Z81	102459	Jun. 30, 2017	Jun. 27, 2016

### Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100764	Aug. 31, 2017	Aug. 19, 2016
Preamplifier	ANRITSU	MH648A	M96057	May 31, 2017	May 10, 2016
Loop antenna	ROHDE&SCHWARZ	HFH2-Z2	892246/010	May 31, 2017	May 9, 2016
Attenuator	TDC	TAT-43B-06	N/A(S209)	May 31, 2017	May 10, 2016
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	2155	Jun. 30, 2017	Jun. 2, 2016
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	Jun. 30, 2017	Jun. 2, 2016
Attenuator	TME	CFA-01NPJ-6	N/A(S273)	May 31, 2017	May 25, 2016
Attenuator	TME	CFA-01NPJ-3	N/A(S270)	May 31, 2017	May 25, 2016
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	Jul. 31, 2017	Jul. 15, 2016
Preamplifier	TSJ	MLA-1840-B03-35	1240332	Jun. 30, 2017	Jun. 16, 2016
Double ridged guide antenna	EMCO	3115	5205	Mar. 31, 2017	Mar. 3, 2016
Double ridged guide antenna	ETS LINDGREN	3117	00052315	Feb. 28, 2017	Feb. 23, 2016
Attenuator	Agilent Technologies	8491B	MY39268633	Feb. 28, 2017	Feb. 23, 2016
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170189	Jun. 30, 2017	Jun. 16, 2016
Preamplifier	TSJ	MLA-1840-B03-35	1240332	Jun. 30, 2017	Jun. 16, 2016
Microwave cable	SUHNER	SUCOFELX102/2m	31648	Mar. 31, 2017	Mar. 29, 2016
Notch filter	Micro-Tronics	BRM50702	045	Apr. 30, 2017	Apr. 8, 2016
Microwave cable	SUHNER	SUCOFLEX104/9m	346316/4	May 31, 2017	May 25, 2016
		SUCOFLEX104/1m	322084/4	May 31, 2017	May 25, 2016
		SUCOFLEX104/1.5m	317226/4	May 31, 2017	May 25, 2016
		SUCOFLEX104/7m	41625/6	May 31, 2017	May 25, 2016
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.3.61	N/A	N/A
Absorber	RIKEN	PFP30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	May 31, 2017	May 11, 2016
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	May 31, 2017	May 12, 2016


### Conducted emission at mains port

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100764	Aug. 31, 2017	Aug. 19, 2016
Attenuator	HUBER+SUHNER	6810.01.A	N/A(S411)	Feb. 28, 2017	Feb. 23, 2016
Line impedance stabilization network for EUT	Kyoritsu Electrical Works, Ltd.	KNW-407F	8-2003-1	Mar. 31, 2017	Mar. 28, 2016
Coaxial cable	FUJIKURA	5D-2W/4m	N/A(S330)	Feb. 28, 2017	Feb. 23, 2016
Coaxial cable	FUJIKURA	5D-2W/1m	N/A(S193)	Feb. 28, 2017	Feb. 23, 2016
Coaxial cable	SUHNER	RG214/U/10m	N/A(S194)	Feb. 28, 2017	Feb. 23, 2016
PC	DELL	DIMENSION	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/CE-AJ	0611193/V5.6.000	N/A	N/A


\*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.

## ***Appendix B. Duty Cycle***

## [Plot & Calculation]

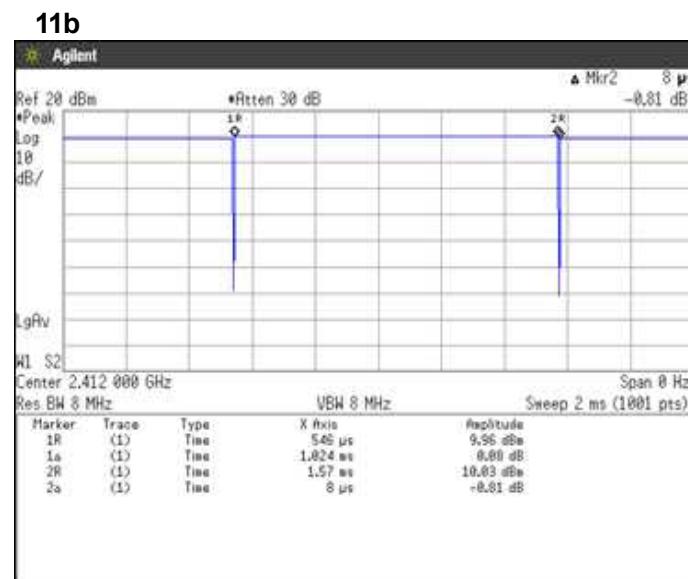

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 1024[\mu\text{s}] / (1024[\mu\text{s}] + 8[\mu\text{s}]) = 99.22\%$$

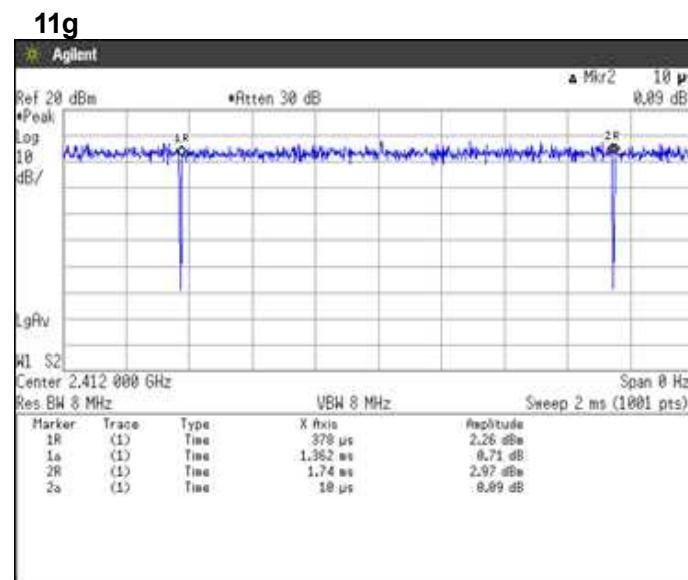


$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 1362[\mu\text{s}] / (1362[\mu\text{s}] + 10[\mu\text{s}]) = 99.27\%]$$



Zacta

### 11n (HT20)

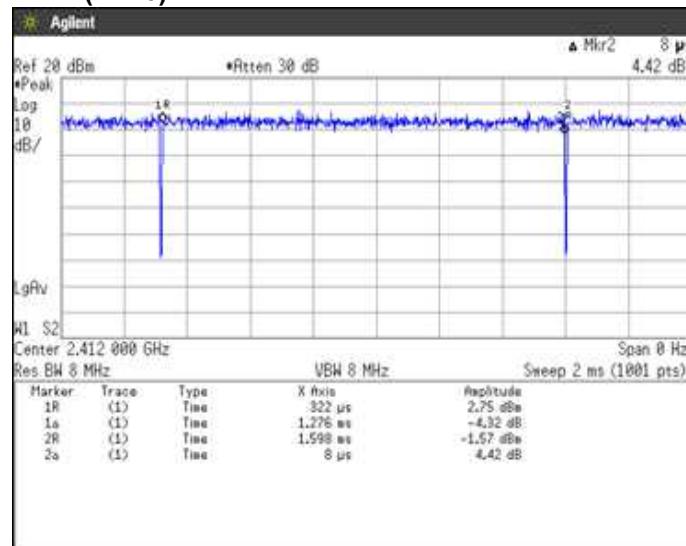

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 1276[\mu\text{s}] / (1276[\mu\text{s}] + 8[\mu\text{s}]) = 99.38\%]$$