



Zacta

# TEST REPORT

Report number : JPD-TR-17099-0

Issue date : May 10, 2017

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

## FCC Part 27 Subpart C FCC Part 27 Subpart H

The test results are traceable to the international or national standards.

|                            |                       |
|----------------------------|-----------------------|
| Applicant                  | : KYOCERA Corporation |
| Equipment under test (EUT) | : Mobile Phone        |
| Model number               | : DA58                |
| FCC ID                     | : JOYDA58             |

Date of test : March 16, 17, 2017  
April 3, 4, 5, 12, 13, 2017  
Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center  
5-4149-7, Hachimanpara, Yonezawa-shi,  
Yamagata, 992-1128 Japan  
Phone: +81-238-28-2881 Fax: +81-238-28-2888  
Test results : Complied

The results in this report are applicable only to the equipment tested.  
This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.  
This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, ILAC-MRA, or any agency of the federal government.

Tested by : Tadahiro Seino  
Tadahiro Seino

Approved by : Hiroaki Suzuki  
Hiroaki Suzuki  
Lab Manager of RF Lab



## Table of contents

---

|                                                                      | Page      |
|----------------------------------------------------------------------|-----------|
| <b>1. Summary of Test .....</b>                                      | <b>4</b>  |
| 1.1 Purpose of test .....                                            | 4         |
| 1.2 Standards .....                                                  | 4         |
| 1.3 List of applied test to the EUT .....                            | 4         |
| 1.4 Modification to the EUT by laboratory .....                      | 4         |
| <b>2. Equipment Under Test .....</b>                                 | <b>5</b>  |
| 2.1 General Description of equipment .....                           | 5         |
| 2.2 EUT information .....                                            | 5         |
| 2.3 Variation of the family model(s) .....                           | 6         |
| 2.4 Description of Test mode .....                                   | 6         |
| <b>3. Configuration of equipment .....</b>                           | <b>7</b>  |
| 3.1 Equipment(s) used .....                                          | 7         |
| 3.2 System configuration .....                                       | 7         |
| <b>4. Effective Radiated Power .....</b>                             | <b>8</b>  |
| 4.1 Measurement procedure .....                                      | 8         |
| 4.2 Calculation method .....                                         | 9         |
| 4.3 Limit .....                                                      | 9         |
| 4.4 Test data .....                                                  | 10        |
| <b>5. Peak to Average Ratio .....</b>                                | <b>11</b> |
| 5.1 Measurement procedure .....                                      | 11        |
| 5.2 Limit .....                                                      | 11        |
| 5.3 Measurement result .....                                         | 11        |
| 5.4 Trace data .....                                                 | 12        |
| <b>6. Occupied Bandwidth .....</b>                                   | <b>14</b> |
| 6.1 Measurement procedure .....                                      | 14        |
| 6.2 Limit .....                                                      | 14        |
| 6.3 Measurement result .....                                         | 15        |
| 6.4 Trace data .....                                                 | 16        |
| <b>7. Band Edge Spurious and Harmonic at Antenna Terminals .....</b> | <b>18</b> |
| 7.1 Measurement procedure .....                                      | 18        |
| 7.2 Limit .....                                                      | 18        |
| 7.3 Measurement result .....                                         | 19        |
| 7.4 Trace data .....                                                 | 20        |
| <b>8. Radiated Emissions and Harmonic Emissions .....</b>            | <b>42</b> |
| 8.1 Measurement procedure .....                                      | 42        |
| 8.2 Calculation method .....                                         | 43        |
| 8.3 Limit .....                                                      | 43        |
| 8.4 Test data .....                                                  | 44        |
| <b>9. Frequency Stability .....</b>                                  | <b>47</b> |
| 9.1 Measurement procedure .....                                      | 47        |
| 9.2 Limit .....                                                      | 47        |
| 9.3 Measurement result .....                                         | 48        |
| <b>10. Uncertainty of measurement .....</b>                          | <b>49</b> |



Zacta

**11. Laboratory Information .....50**

**Appendix A. Test equipment .....51**

## 1. Summary of Test

### 1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 27 Subpart C and Subpart H.

### 1.2 Standards

CFR47 FCC Part 27 Subpart C  
CFR47 FCC Part 27 Subpart H

#### 1.2.1 Test Methods

KDB 971168 D01 Power Meas License Digital Systems v02r02  
ANSI/TIA/EIA-603-D-2010

#### 1.2.2 Deviation from standards

None

### 1.3 List of applied test to the EUT

| Test items<br>Section | Test items                                          | Condition | Result                 |
|-----------------------|-----------------------------------------------------|-----------|------------------------|
| 2.1046                | Conducted Output Power                              | Conducted | PASS <sup>Note 1</sup> |
| 27.50                 | Effective Radiated Power                            | Radiated  | PASS                   |
| 27.50                 | Peak to Average Ratio                               | Conducted | PASS                   |
| 2.1049                | Occupied Bandwidth                                  | Conducted | PASS                   |
| 27.53<br>2.1051       | Band Edge Spurious and Harmonic at Antenna Terminal | Conducted | PASS                   |
| 27.53<br>2.1053       | Radiated emissions and Harmonic Emissions           | Radiated  | PASS                   |
| 27.54<br>2.1055       | Frequency Stability                                 | Conducted | PASS                   |

Note 1: Refer to RF Exposure Report (Test Report\_SAR)

#### 1.3.1 Test set up

Table-Top

### 1.4 Modification to the EUT by laboratory

None

## 2. Equipment Under Test

---

### 2.1 General Description of equipment

EUT is the Mobile Phone.

### 2.2 EUT information

|                                               |   |                                                                                                                                                   |
|-----------------------------------------------|---|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Applicant                                     | : | KYOCERA Corporation<br>Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa,<br>Japan<br>Phone: +81-45-943-6253 Fax: +81-45-943-6314 |
| Equipment under test                          | : | Mobile Phone                                                                                                                                      |
| Trade name                                    | : | Kyocera                                                                                                                                           |
| Model number                                  | : | DA58                                                                                                                                              |
| Serial number                                 | : | N/A                                                                                                                                               |
| EUT condition                                 | : | Pre-Production                                                                                                                                    |
| Power ratings                                 | : | Battery: DC 3.8V                                                                                                                                  |
| Size                                          | : | (W) 71.0 × (D) 13.6 × (H) 145.0 mm                                                                                                                |
| Environment                                   | : | Indoor and Outdoor use                                                                                                                            |
| Terminal limitation                           | : | -20°C to 60°C                                                                                                                                     |
| RF Specification<br>Frequency of<br>Operation | : | Up Link<br>LTE Band X VII: 704-716MHz<br><br>Down Link<br>LTE Band X VII: 734-746MHz                                                              |
| Modulation type                               | : | QPSK, 16QAM                                                                                                                                       |
| Emission designator                           | : | BW 5M QPSK: 4M48G7D, 16QAM: 4M49W7D<br>BW 10M QPSK: 8M97G7D, 16QAM: 8M99W7D                                                                       |
| Effective Radiated<br>Power (E.R.P.)          | : | QPSK: 0.030W (14.8dBm)<br>16QAM: 0.027W (14.3dBm)                                                                                                 |
| Antenna type                                  | : | Internal antenna                                                                                                                                  |
| Antenna gain                                  | : | -6.1 dBi                                                                                                                                          |

### 2.3 Variation of the family model(s)

Not applicable

### 2.4 Description of Test mode

The EUT had been tested under operating condition.  
There are three channels have been tested as following:

| Band           | Modulation | Bandwidth | Channel | Frequency [MHz] |
|----------------|------------|-----------|---------|-----------------|
| LTE Band X VII | QPSK       | 5MHz      | 23755   | 706.5           |
|                |            |           | 23790   | 710.0           |
|                |            |           | 23825   | 713.5           |
|                |            | 10MHz     | 23780   | 709.0           |
|                |            |           | 23790   | 710.0           |
|                |            |           | 23800   | 711.0           |
|                | 16QAM      | 5MHz      | 23755   | 706.5           |
|                |            |           | 23790   | 710.0           |
|                |            |           | 23825   | 713.5           |
|                |            | 10MHz     | 23780   | 709.0           |
|                |            |           | 23790   | 710.0           |
|                |            |           | 23800   | 711.0           |

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in X axis and the worst case recorded.



Zacta

### 3. Configuration of equipment

---

#### 3.1 Equipment(s) used

| No. | Equipment    | Company | Model No. | Serial No. | FCC ID / DoC | Comment |
|-----|--------------|---------|-----------|------------|--------------|---------|
| 1   | Mobile Phone | KYOCERA | DA58      | N/A        | JOYDA58      | EUT     |

#### 3.2 System configuration

1. Mobile Phone  
(EUT)

Note1: Numbers assigned to equipment or cables on this diagram correspond to the list in "3.1 Equipment(s) used".

## 4. Effective Radiated Power

### 4.1 Measurement procedure [FCC 27.50]

#### <Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Log periodic antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.

#### <Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- a) Span = 1.5 times the OBW
- b) RBW = 1-5% of the expected OBW, not to exceed 1MHz
- c) VBW  $\geq 3 \times$  RBW
- d) Number of sweep points  $\geq 2 \times$  span / RBW
- e) Sweep time = auto-couple
- f) Detector = RMS (power averaging)
- g) If the EUT can be configured to transmit continuously (i.e., burst duty cycle  $\geq 98\%$ ), then set the trigger to free run.
- h) If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle  $< 98\%$ ), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

#### - Test configuration

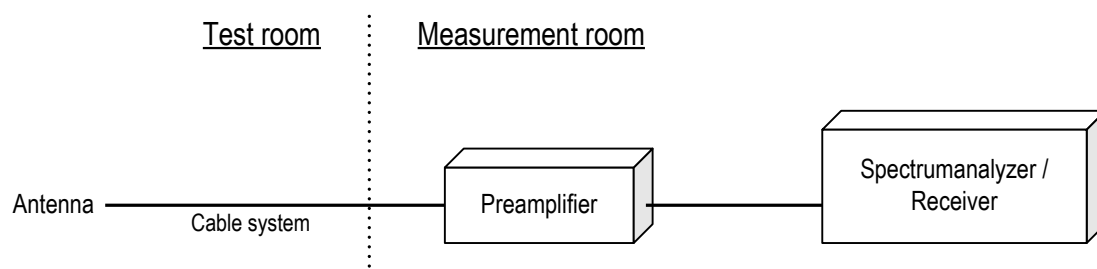



## 4.2 Calculation method

Result (ERP) = S.G Reading – Cable loss + Antenna Gain

Margin = Limit – Result (ERP)

Example:

Limit @ 710MHz : 34.7dBm

S.G Reading = 25.5dBm Cable loss = 0.7dB Ant. Gain = -10.1dBd

Result =  $25.5 - 0.7 + (-10.1) = 14.8\text{dBm}$

Margin =  $34.7 - 14.8 = 19.9\text{dB}$

## 4.3 Limit

3 W (34.7dBm)

**4.4 Test data**

Date : April 3, 2017  
 Temperature : 20.1 [°C]  
 Humidity : 26.2 [%]  
 Test place : 3m Semi-anechoic chamber

Test engineer : Tadahiro Seino

Date : April 4, 2017  
 Temperature : 22.3 [°C]  
 Humidity : 26.3 [%]  
 Test place : 3m Semi-anechoic chamber

Test engineer : Tadahiro Seino

Date : April 12, 2017  
 Temperature : 24.2 [°C]  
 Humidity : 24.7 [%]  
 Test place : 3m Semi-anechoic chamber

Test engineer : Tadahiro Seino

**[LTE Band X VII]  
 QPSK, BW 5MHz**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 706.5           | -13.4             | 24.9              | 0.7             | -10.0          | 14.2         | 34.7        | 20.5        |
| H   | 710.0           | -12.9             | 25.5              | 0.7             | -10.1          | 14.8         | 34.7        | 19.9        |
| H   | 713.5           | -13.7             | 24.9              | 0.7             | -10.1          | 14.1         | 34.7        | 20.6        |

**16QAM, BW 5MHz**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 706.5           | -15.1             | 23.1              | 0.7             | -10.0          | 12.4         | 34.7        | 22.3        |
| H   | 710.0           | -14.7             | 23.7              | 0.7             | -10.1          | 13.0         | 34.7        | 21.7        |
| H   | 713.5           | -15.2             | 22.9              | 0.7             | -10.1          | 12.1         | 34.7        | 22.6        |

**QPSK, BW 10MHz**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 709.0           | -13.1             | 25.2              | 0.7             | -10.1          | 14.5         | 34.7        | 20.2        |
| H   | 710.0           | -12.9             | 25.5              | 0.7             | -10.1          | 14.8         | 34.7        | 19.9        |
| H   | 711.0           | -13.2             | 25.2              | 0.7             | -10.1          | 14.5         | 34.7        | 20.2        |

**16QAM, BW 10MHz**

| H/V | Frequency [MHz] | S.A Reading [dBm] | S.G Reading [dBm] | Cable loss [dB] | Ant.Gain [dBi] | Result [dBm] | Limit [dBm] | Margin [dB] |
|-----|-----------------|-------------------|-------------------|-----------------|----------------|--------------|-------------|-------------|
| H   | 709.0           | -14.2             | 24.1              | 0.7             | -10.1          | 13.4         | 34.7        | 21.3        |
| H   | 710.0           | -13.4             | 25.0              | 0.7             | -10.1          | 14.3         | 34.7        | 20.4        |
| H   | 711.0           | -13.5             | 24.9              | 0.7             | -10.1          | 14.2         | 34.7        | 20.5        |

## 5. Peak to Average Ratio


### 5.1 Measurement procedure [FCC 27.50]

The peak to average ratio was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- a) Power Stat CCDF mode
- b) Set resolution / measurement bandwidth  $\geq$  signal's occupied bandwidth.
- c) Set the number of counts to a value that stabilizes the measured CCDF curve.
- d) Set the measurement interval as follows:
  - 1) For continuous transmissions, set to 1ms.
  - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst duration.
- e) Record the maximum PAPR level associated with a probability of 0.1%.

- Test configuration

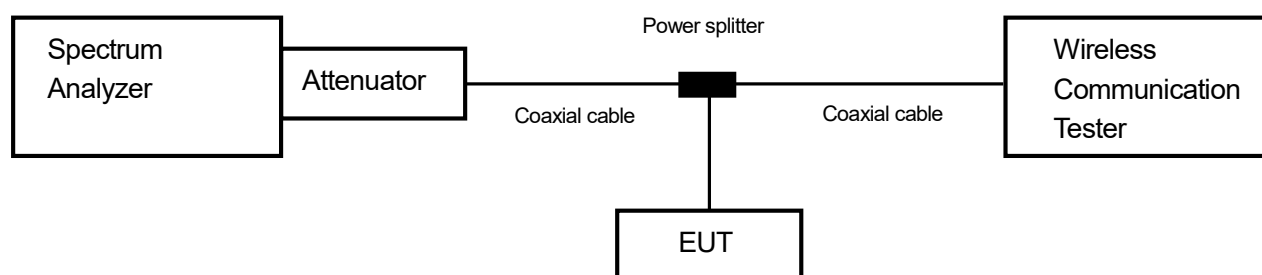

### 5.2 Limit

13dB or less


### 5.3 Measurement result

Date : March 17, 2017  
 Temperature : 22.8 [°C]  
 Humidity : 48.2 [%]  
 Test place : Shielded room No.4


Test engineer :  
 Tadahiro Seino

| Band              | Channel | Frequency [MHz] | Modulation | BW [MHz] | RB   | Peak to Average Power Ratio [dB] | Limit [dB] |
|-------------------|---------|-----------------|------------|----------|------|----------------------------------|------------|
| LTE<br>Band X VII | 23790   | 710.0           | QPSK       | 5        | 25-0 | 5.06                             | 13         |
|                   |         |                 |            | 10       | 50-0 | 4.59                             | 13         |
|                   |         |                 | 16QAM      | 5        | 25-0 | 5.98                             | 13         |
|                   |         |                 |            | 10       | 50-0 | 6.33                             | 13         |


**5.4 Trace data**  
**[LTE Band X VII]**  
**Channel: 23790**  
**QPSK, BW 5MHz, RB25-0**

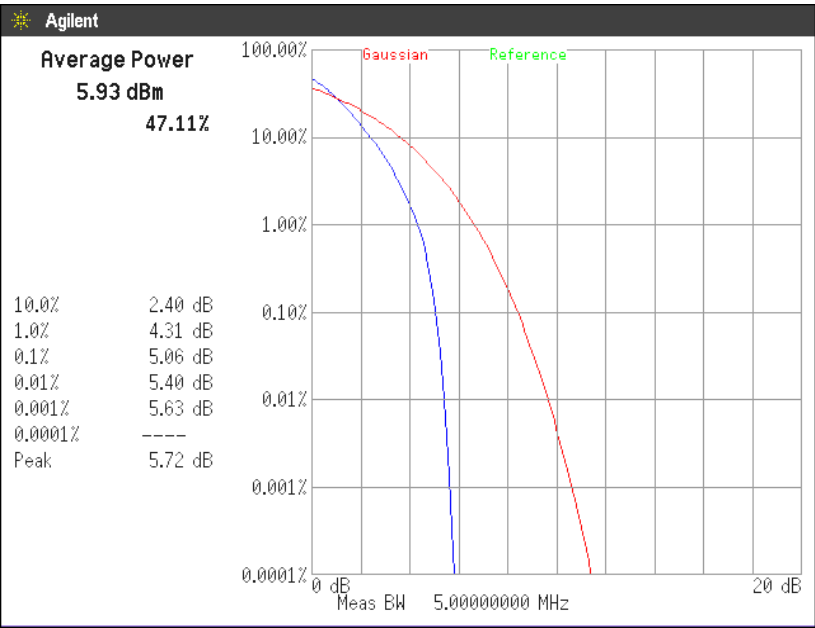


**QPSK, BW 10MHz, RB50-0**

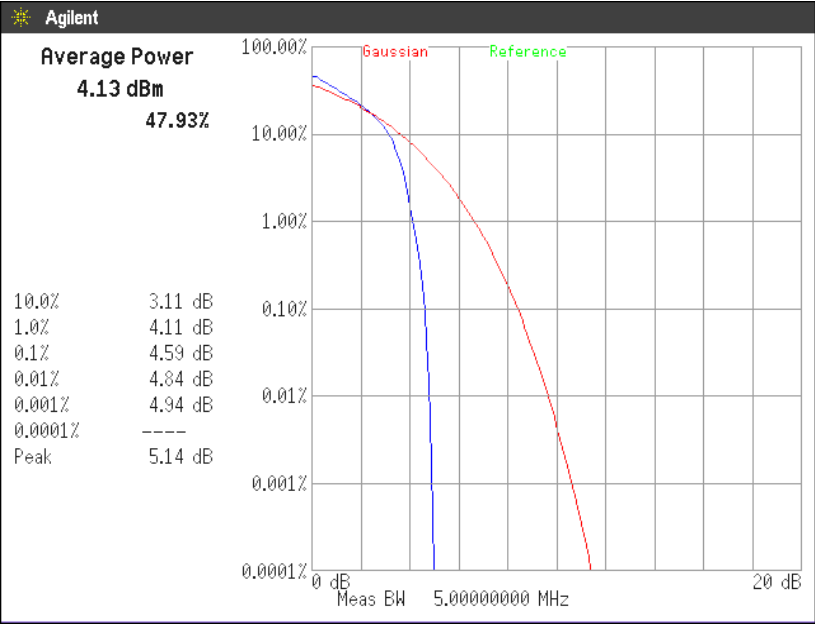

16QAM, BW 5MHz, RB25-0

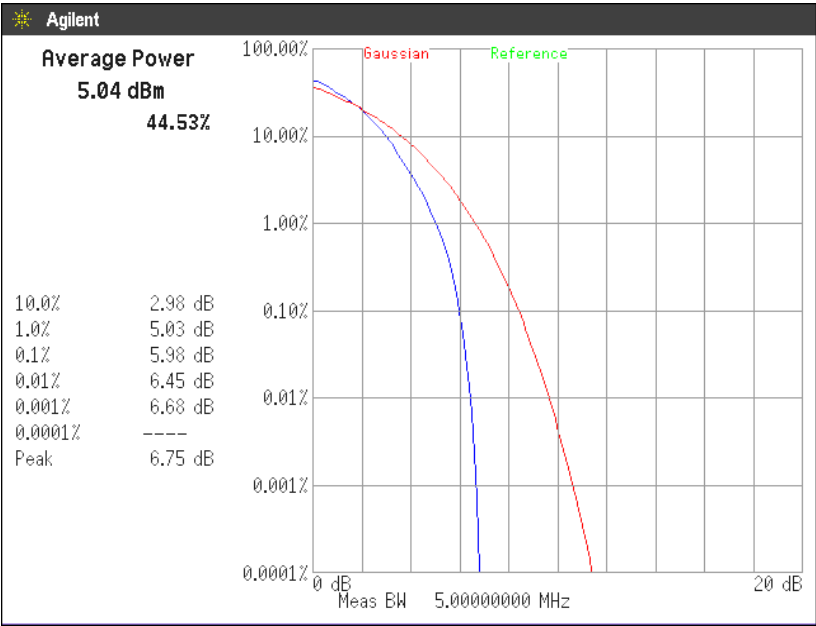

16QAM, BW 10MHz, RB50-0

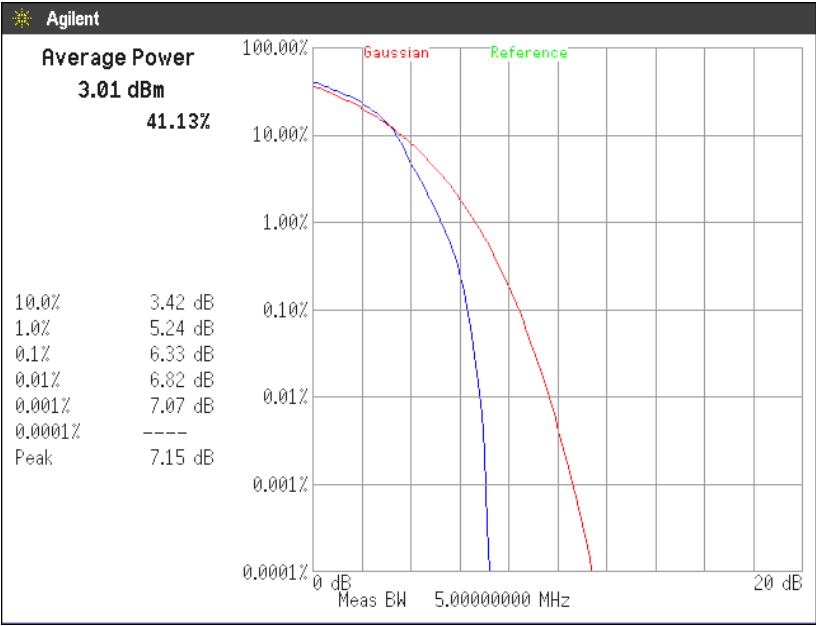

## 6. Occupied Bandwidth


### 6.1 Measurement procedure [FCC 2.1049]

The Occupied bandwidth was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- a) RBW = 1-5% of the expected OBW & VBW  $\geq 3 \times$  RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

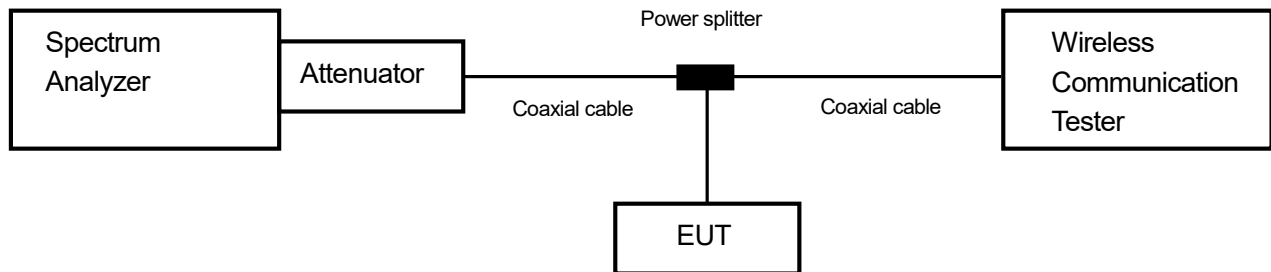

### 6.2 Limit

None

### 6.3 Measurement result

Date : March 17, 2017

Temperature : 22.8 [°C]

Humidity : 48.2 [%]

Test place : Shielded room No.4


Test engineer :

Tadahiro Seino


| BW    | Mode  | UL RB Allocation | UL RB Start | Frequency [MHz] | 26dB Bandwidth [MHz] | 99% OBW [MHz] |
|-------|-------|------------------|-------------|-----------------|----------------------|---------------|
| 5MHz  | QPSK  | 12               | 7           | 710.0           | 3.303                | 2.3344        |
|       |       | 25               | 0           |                 | 4.954                | 4.4797        |
| 5MHz  | 16QAM | 12               | 7           | 710.0           | 3.360                | 2.3473        |
|       |       | 25               | 0           |                 | 4.975                | 4.4925        |
| 10MHz | QPSK  | 25               | 12          | 710.0           | 6.123                | 4.7202        |
|       |       | 50               | 0           |                 | 9.879                | 8.9659        |
| 10MHz | 16QAM | 25               | 12          | 710.0           | 6.062                | 4.7397        |
|       |       | 50               | 0           |                 | 9.851                | 8.9863        |

**6.4 Trace data**  
**[LTE Band X VII]**  
**Channel: 23790**


**QPSK, BW 5MHz**  
**RB12-7**

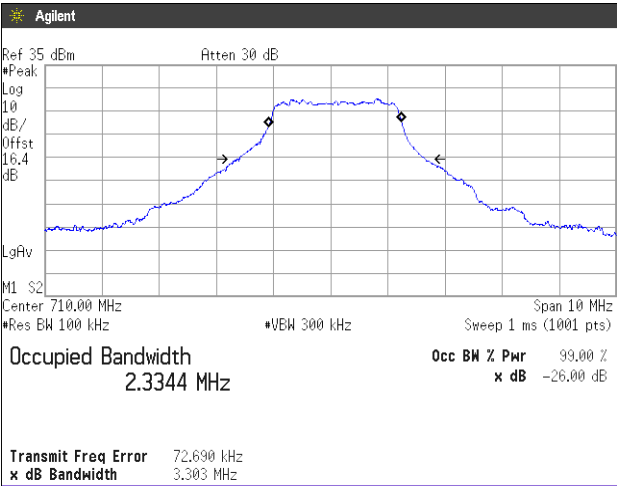


**RB25-0**

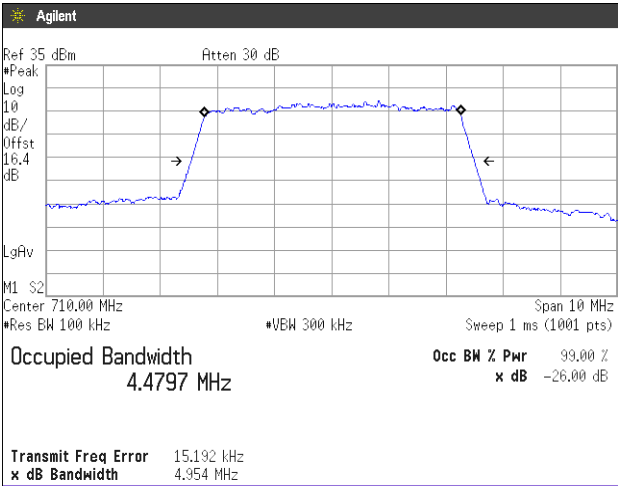

**16QAM, BW 5MHz**  
**RB12-7**

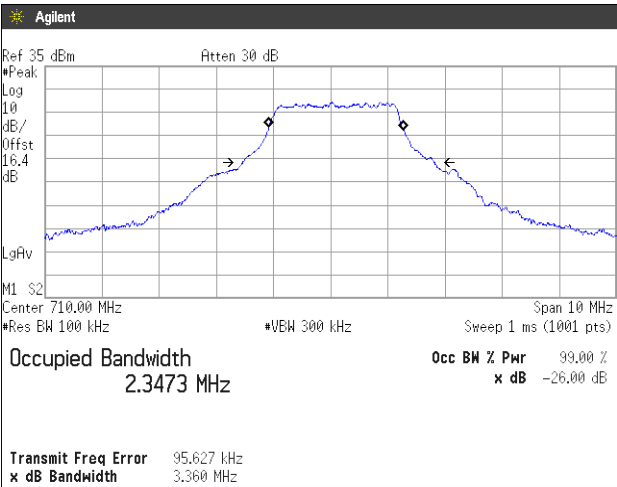


**RB25-0**

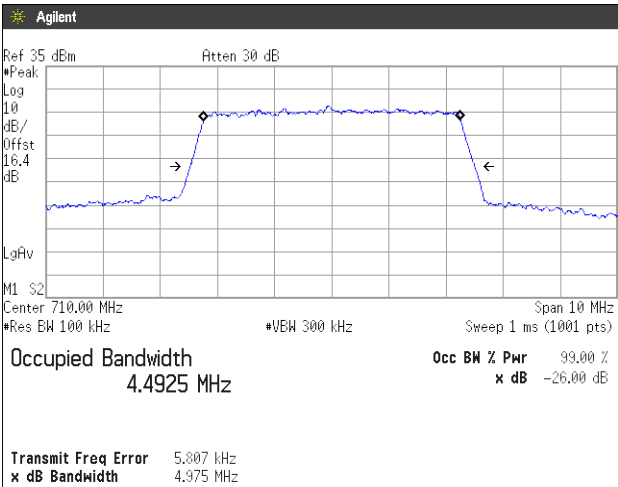





**QPSK, BW 10MHz**  
**RB25-12**

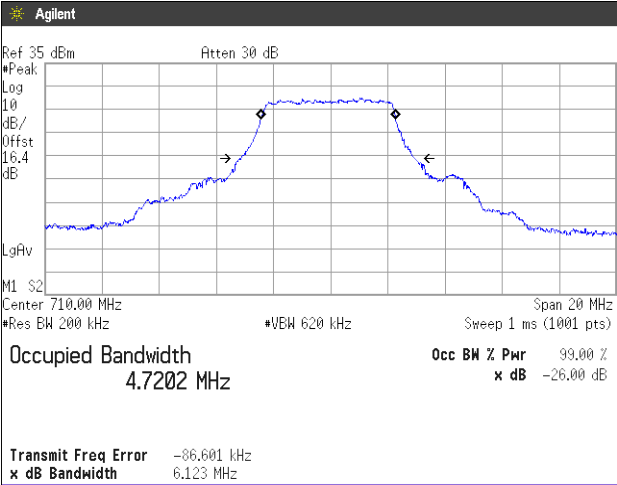


**RB50-0**

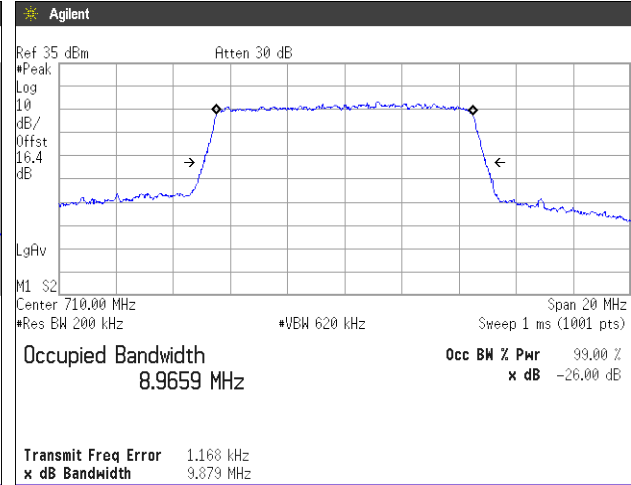

**16QAM, BW 10MHz**  
**RB25-12**

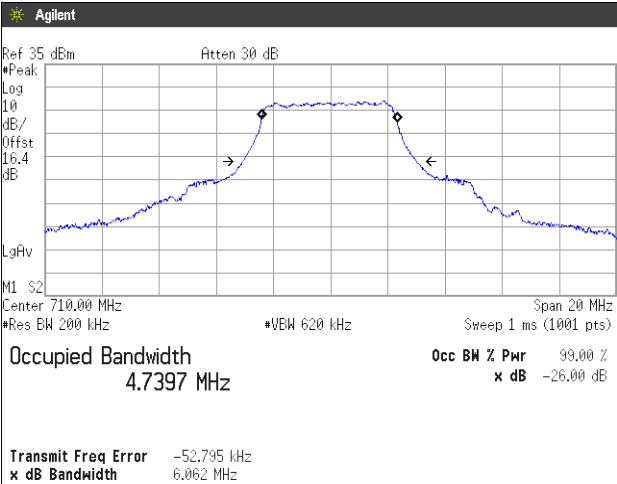

**RB50-0**

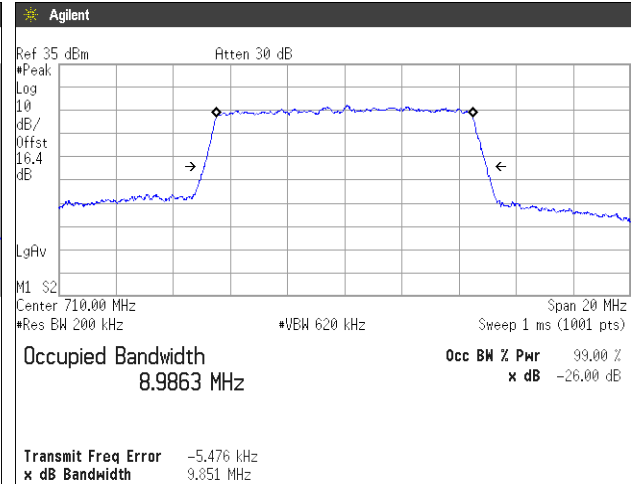

## 7. Band Edge Spurious and Harmonic at Antenna Terminals

### 7.1 Measurement procedure [FCC 27.53, 2.1051]

The band edge spurious and harmonic was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;


<Band Edge>

- a) Span was set large enough so as to capture all out of band emissions near the band edge
- b) RBW  $\geq 1\%$  of the emission bandwidth or  $2\%$  of the emission bandwidth
- c) VBW  $\geq 3 \times$  RBW
- d) Detector = RMS
- e) Trace mode = Max hold
- f) Sweep time = auto-couple
- g) Number of sweep point  $\geq 2 \times$  span / RBW

<Spurious Emissions>

- a) RBW = 1MHz & VBW  $\geq 3 \times$  RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple
- e) Number of sweep point  $\geq 2 \times$  span / RBW

- Test configuration

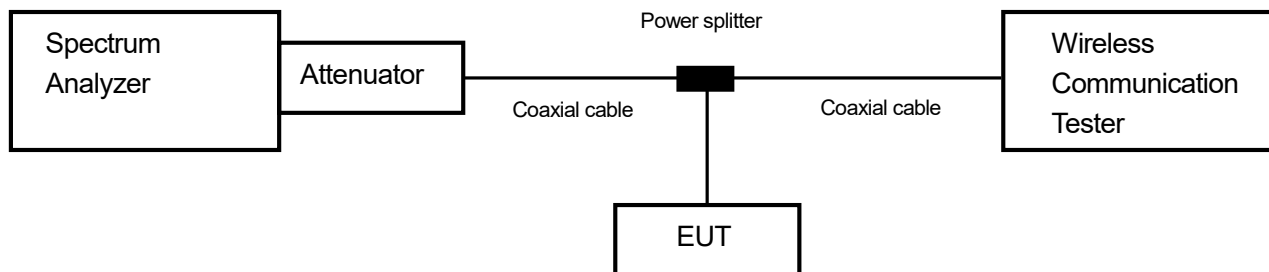

### 7.2 Limit

-13dBm or less

### 7.3 Measurement result

Date : March 17, 2017

Temperature : 22.8 [°C]

Humidity : 48.2 [%]



Test place : Shielded room No.4

Test engineer :



Tadahiro Seino

| Band              | Modulation | Bandwidth | Results            |      |
|-------------------|------------|-----------|--------------------|------|
| LTE<br>Band X VII | QPSK       | 5MHz      | See the trace data | PASS |
|                   |            | 10MHz     | See the trace data | PASS |
|                   | 16QAM      | 5MHz      | See the trace data | PASS |
|                   |            | 10MHz     | See the trace data | PASS |



**7.4 Trace data**  
**[LTE Band X VII]**  
**(Band Edge)**  
**QPSK, BW 5MHz, RB1-0**  
**Channel: Low**

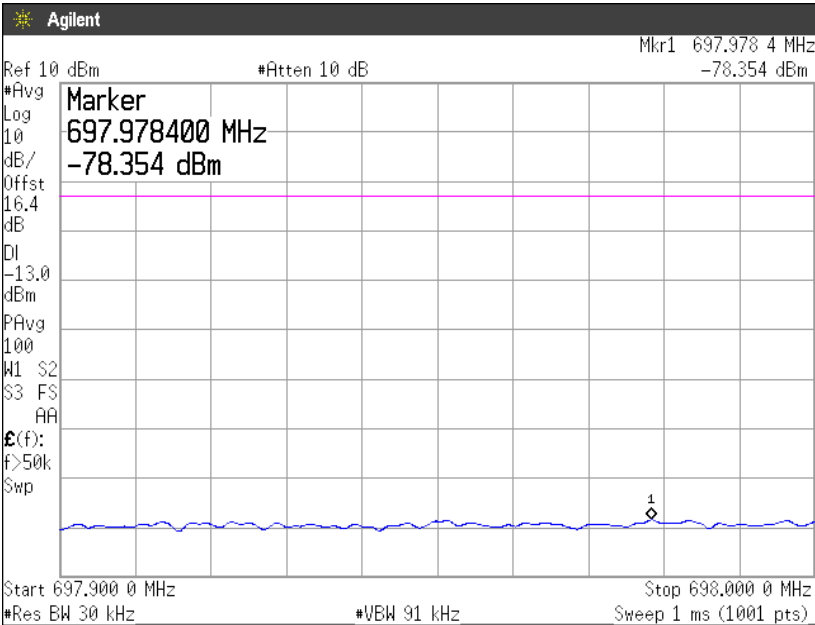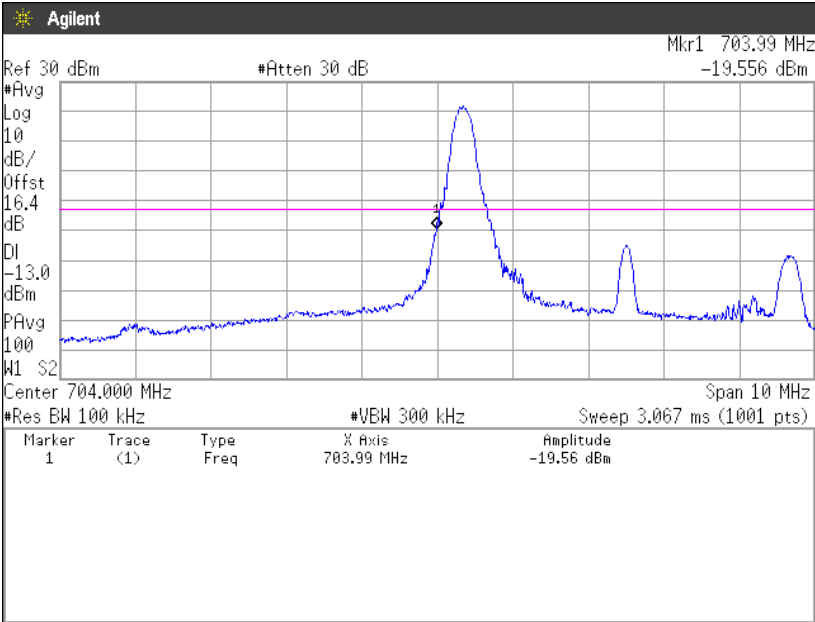



**QPSK, BW 5MHz, RB1-24**  
**Channel: High**

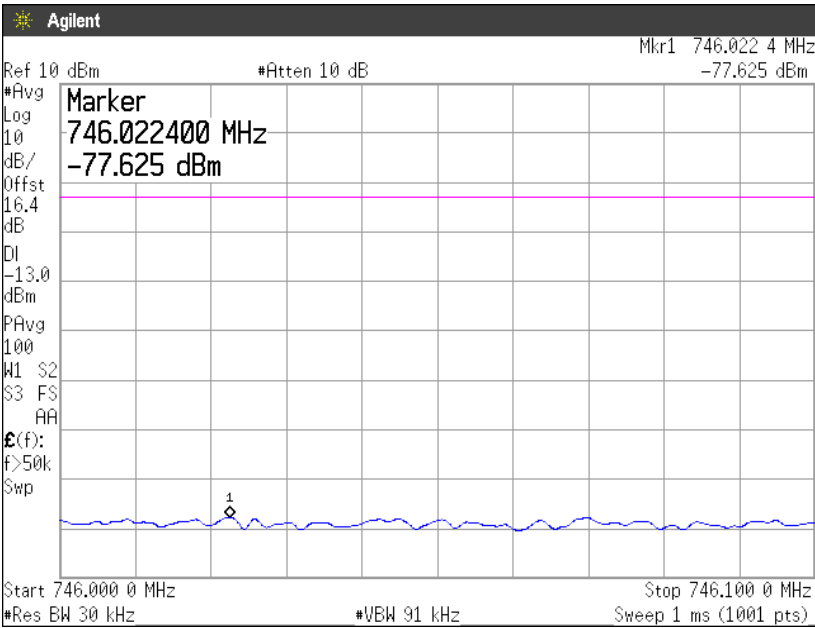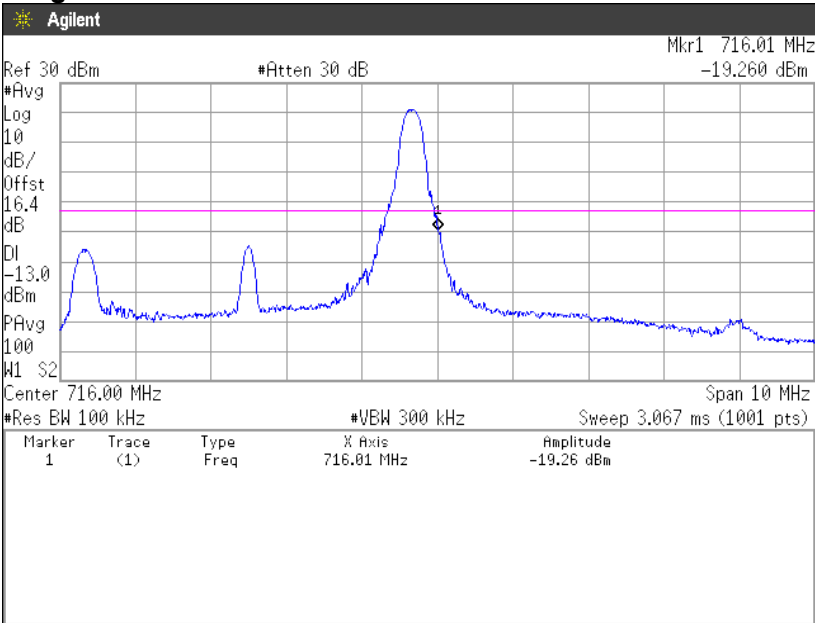



**QPSK, BW 5MHz, RB25-0**  
**Channel: Low**

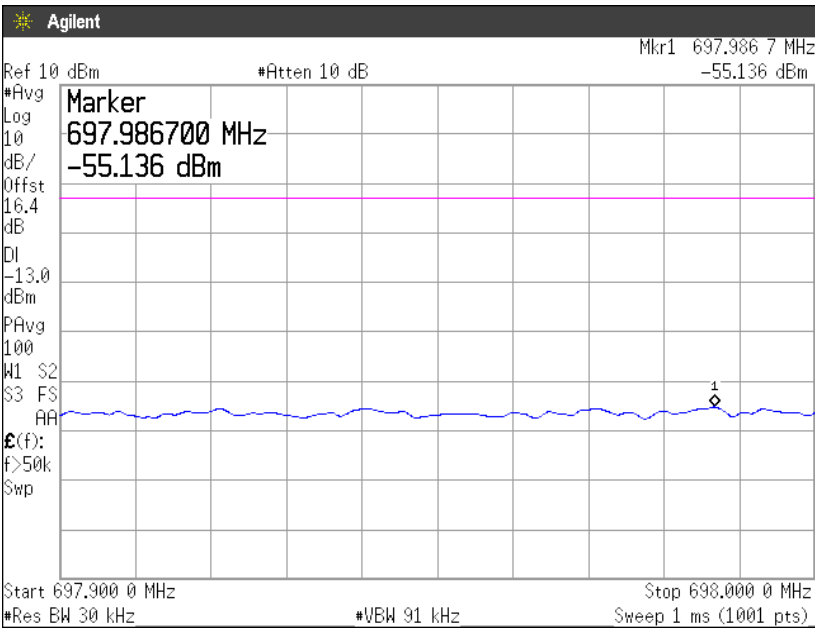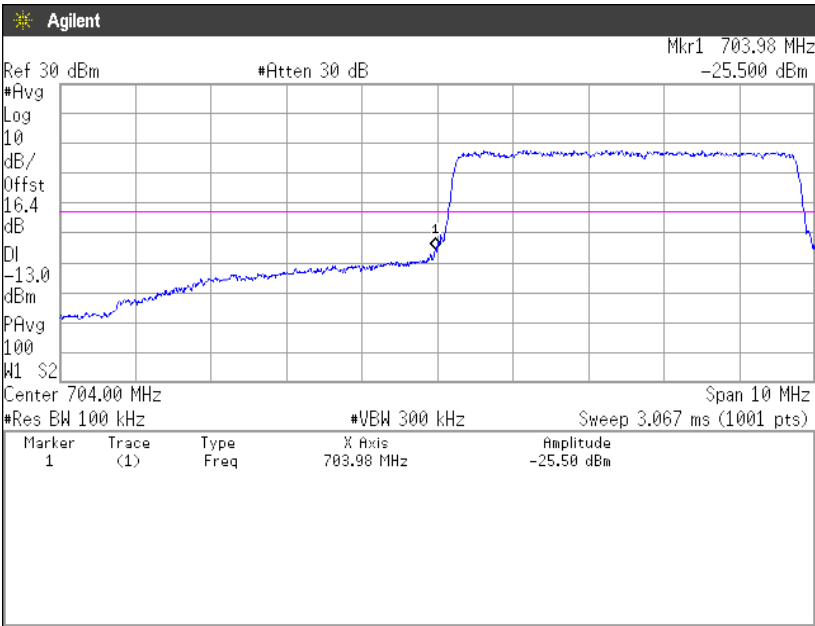

**QPSK, BW 5MHz, RB25-0**  
**Channel: High**

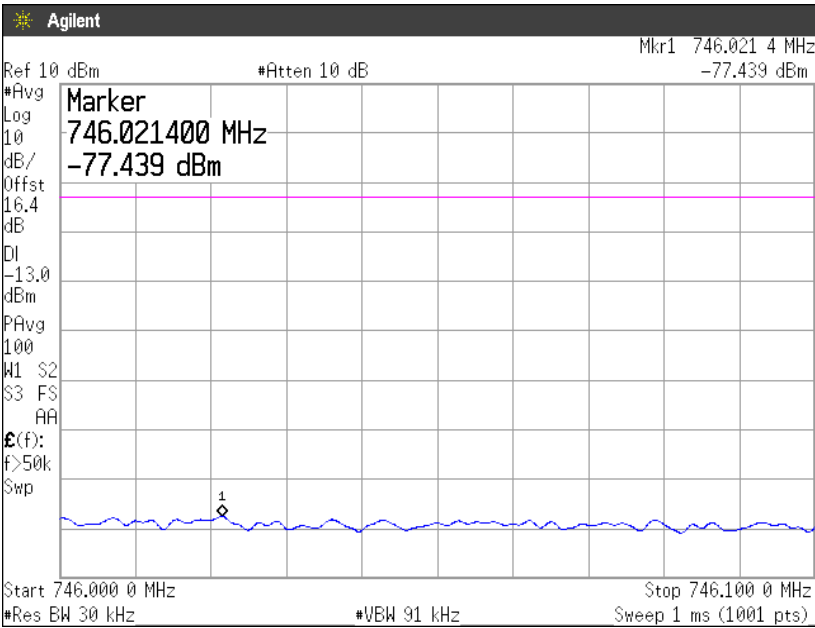
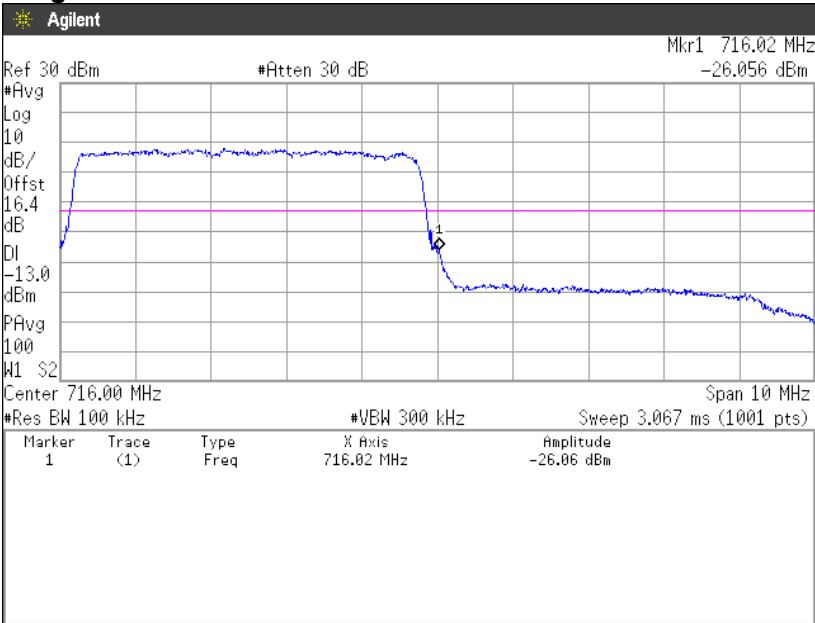


16QAM, BW 5MHz, RB1-0  
Channel: Low

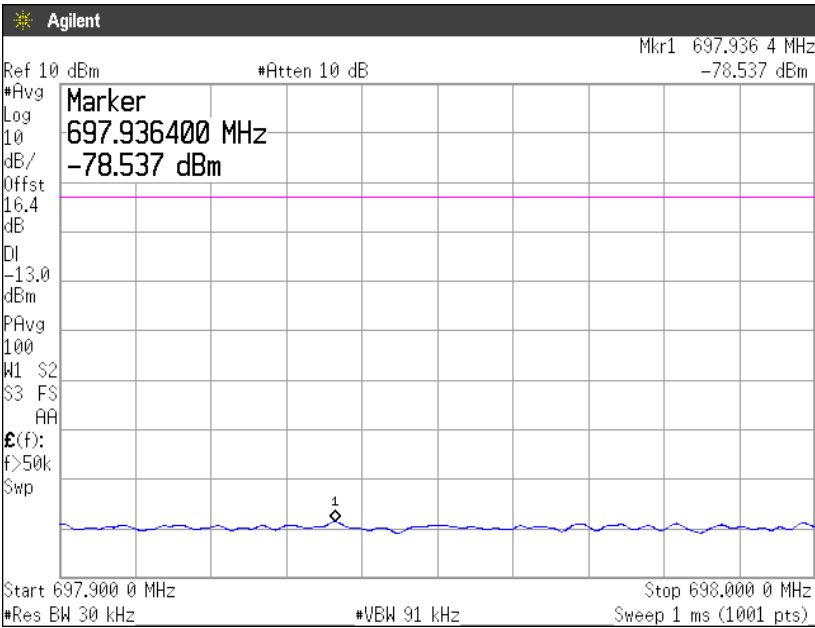
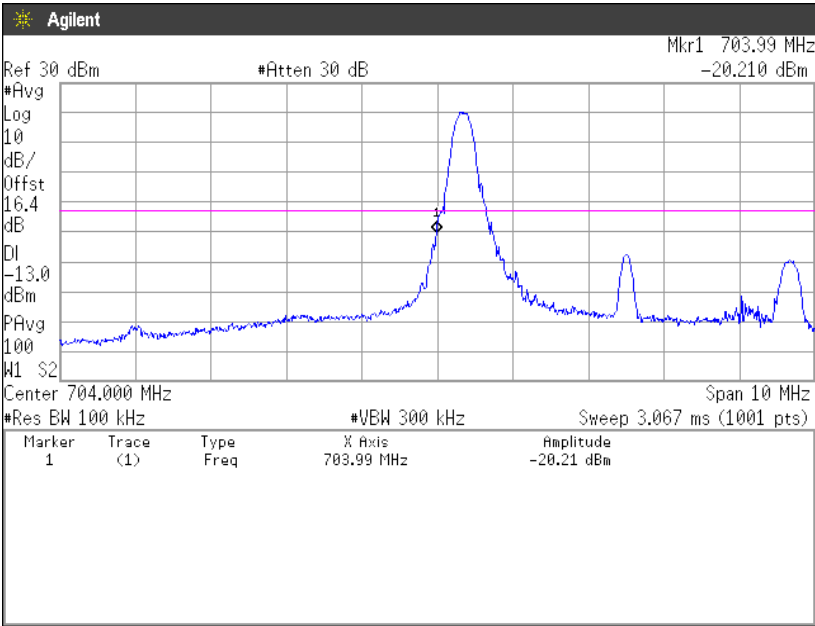






16QAM, BW 5MHz, RB1-24  
Channel: High

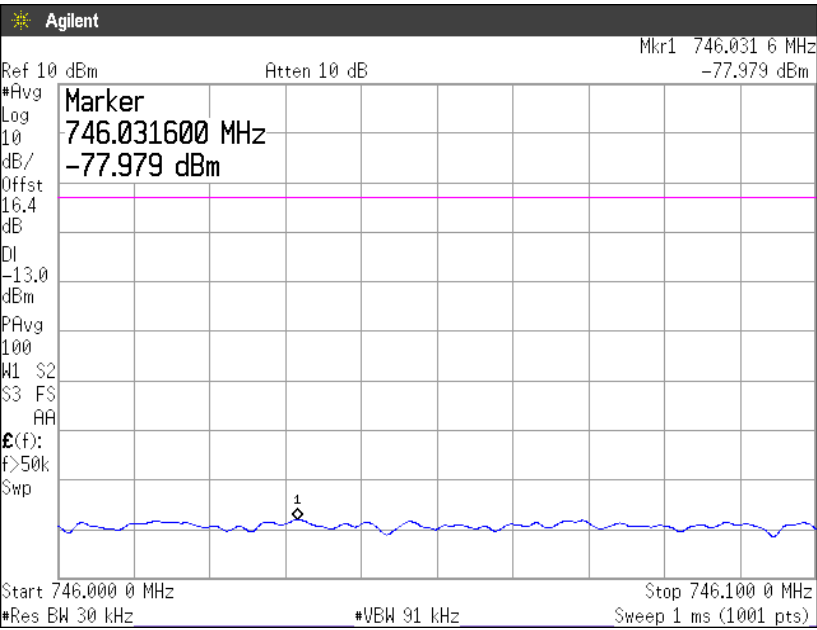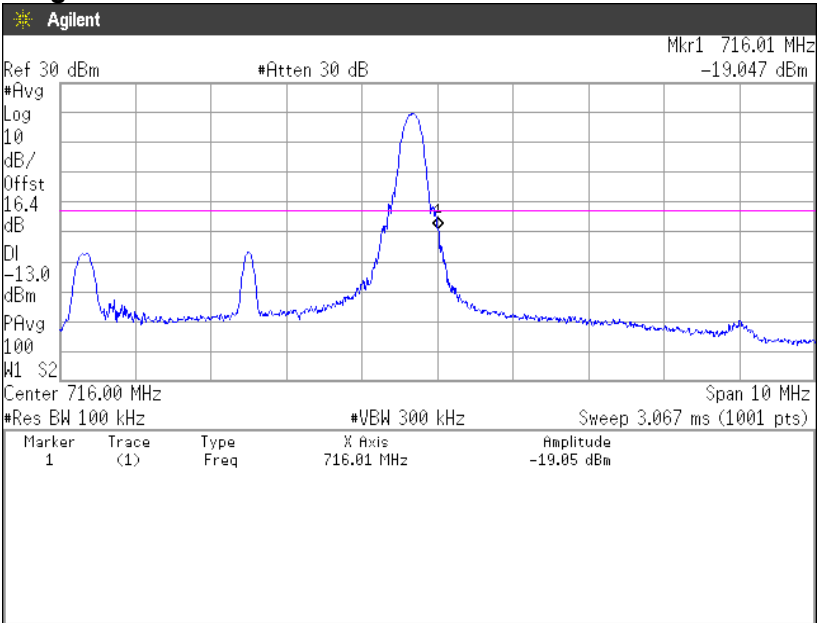



**16QAM, BW 5MHz, RB25-0**  
**Channel: Low**

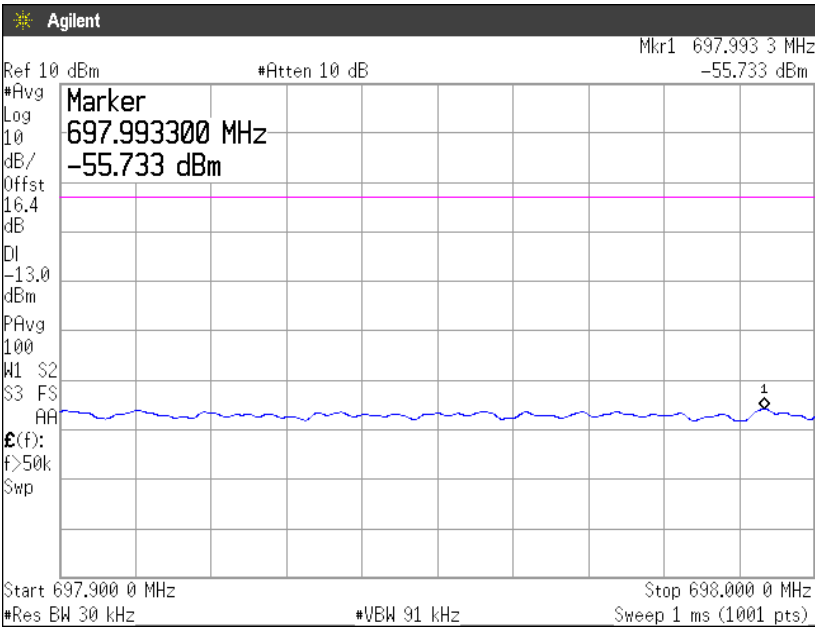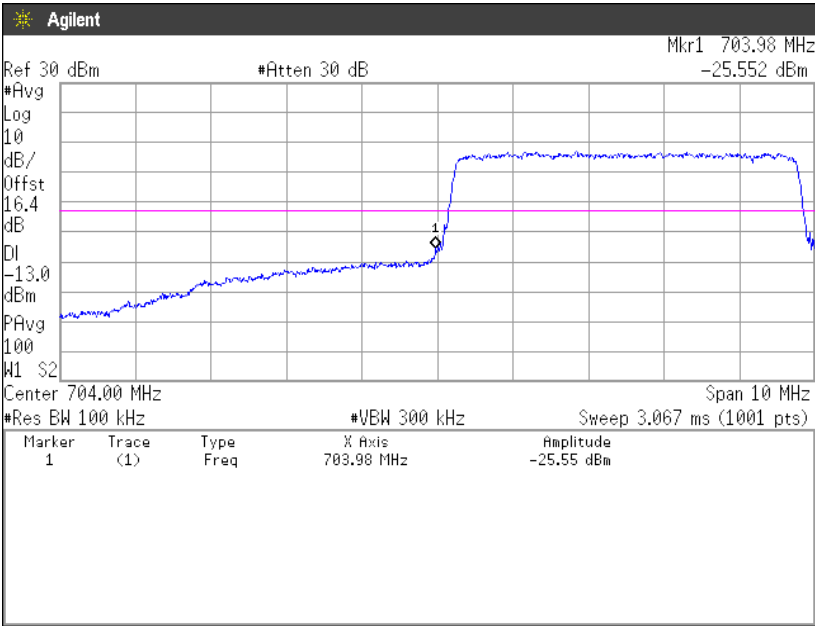



16QAM, BW 5MHz, RB25-0  
Channel: High

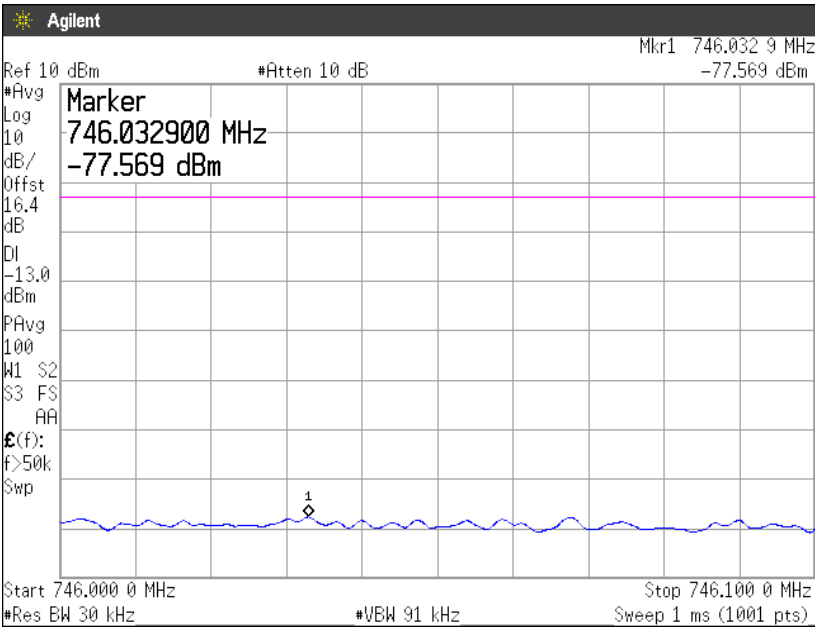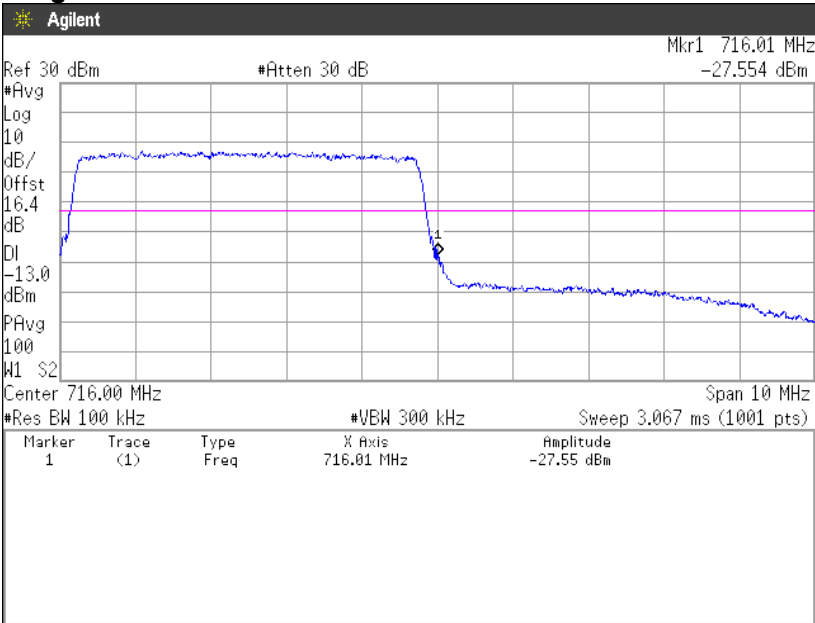



**QPSK, BW 10MHz, RB1-0**  
**Channel: Low**

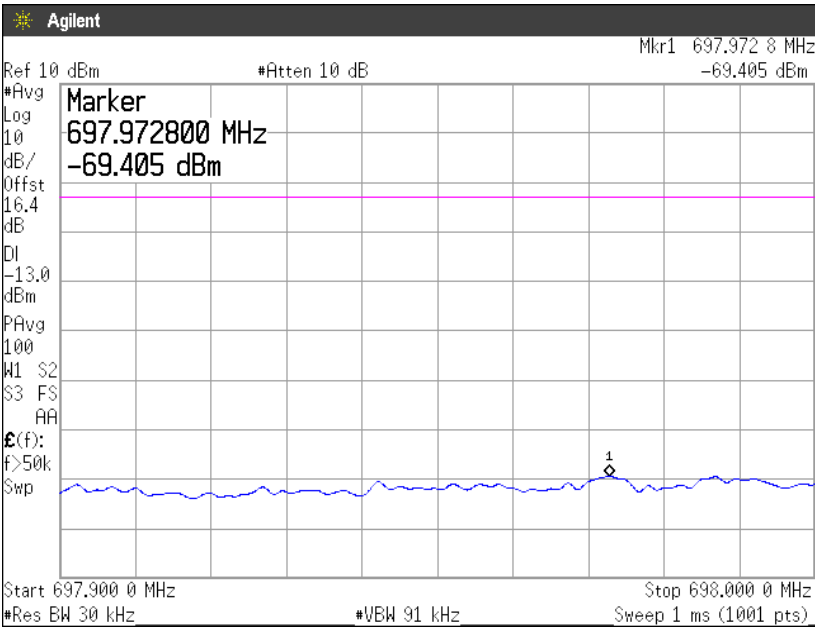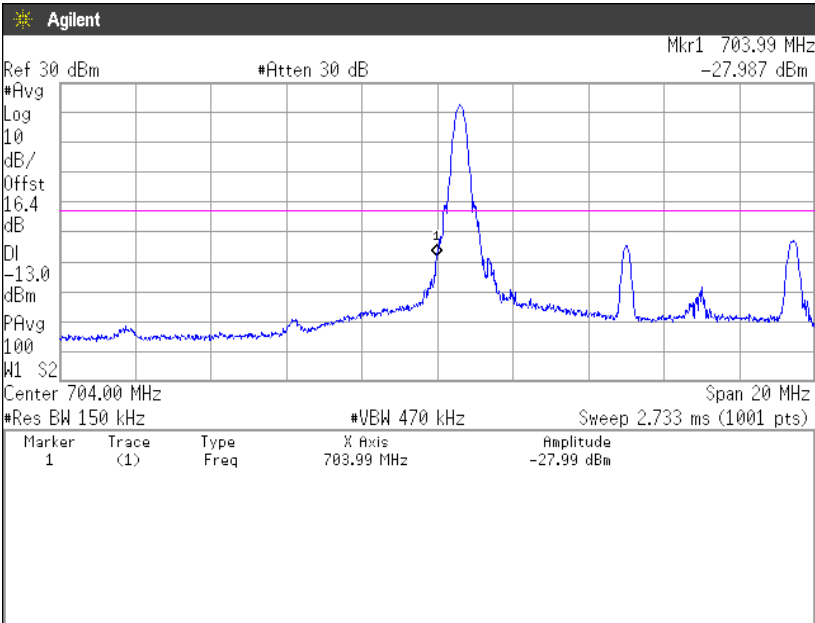



**QPSK, BW 10MHz, RB1-49**  
**Channel: High**

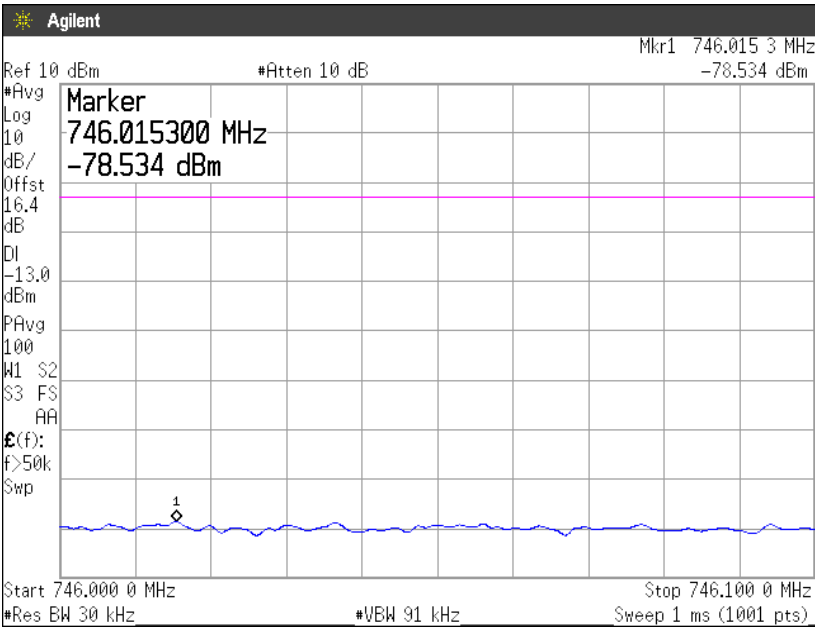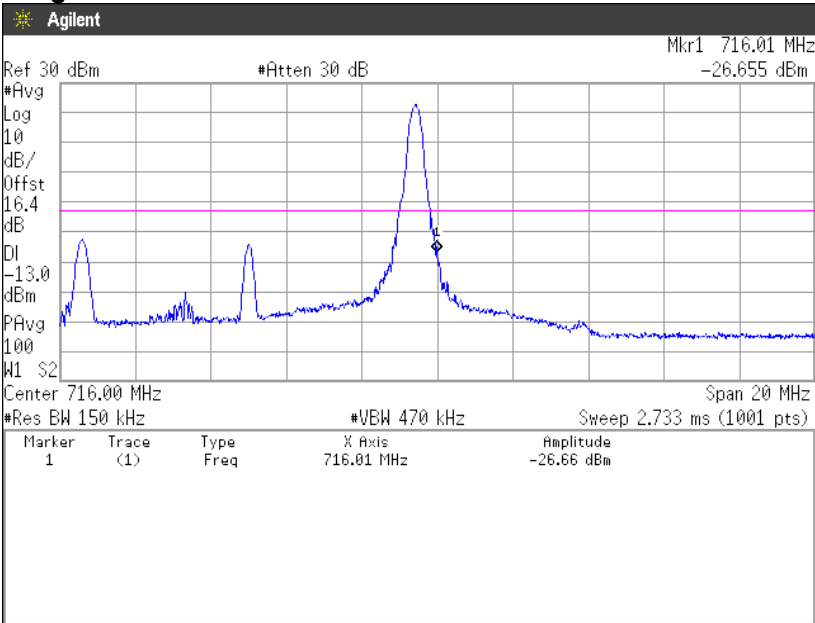



**QPSK, BW 10MHz, RB50-0**  
**Channel: Low**

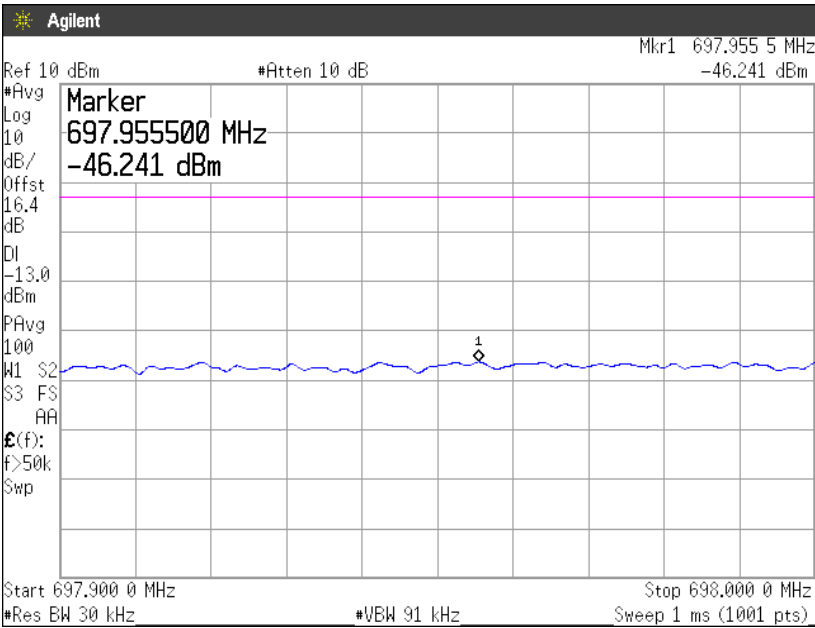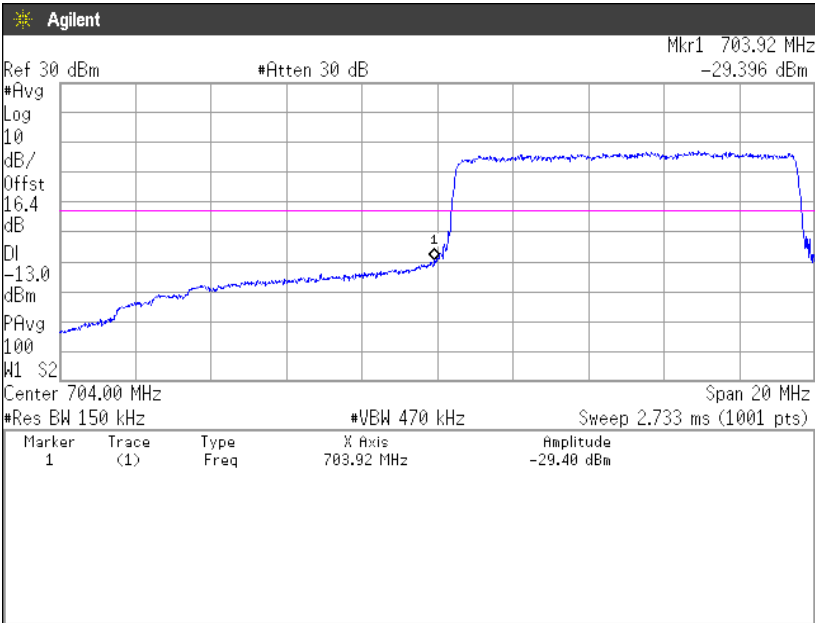

**QPSK, BW 10MHz, RB50-0**  
**Channel: High**

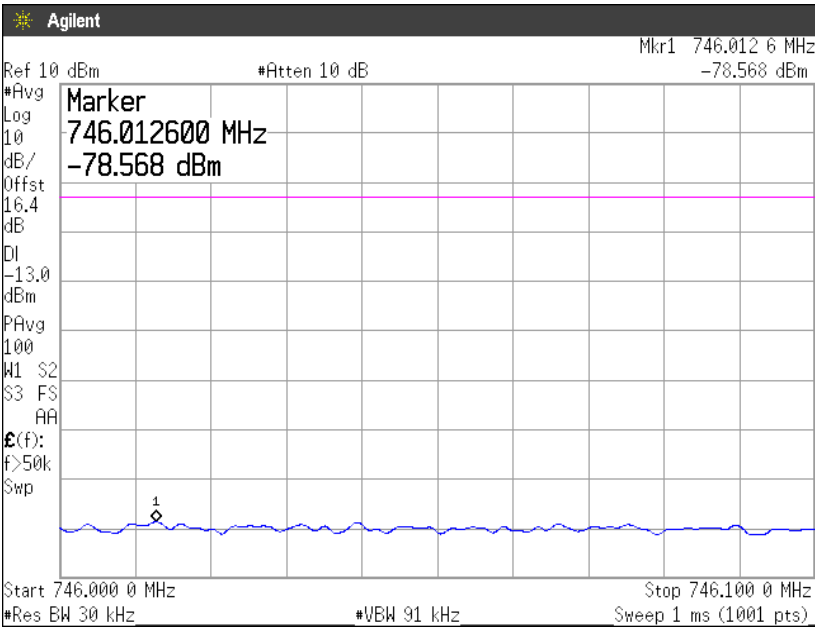
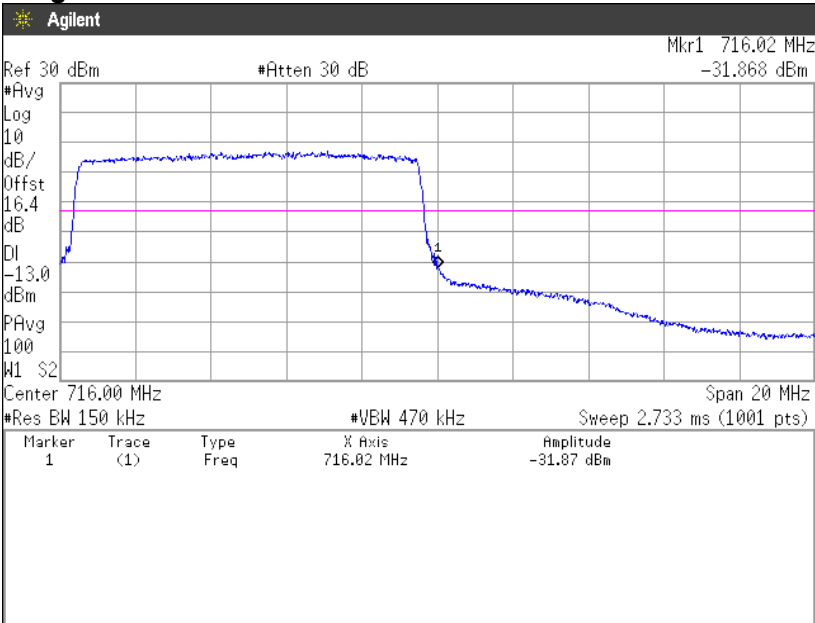


**16QAM, BW 10MHz, RB1-0**  
**Channel: Low**

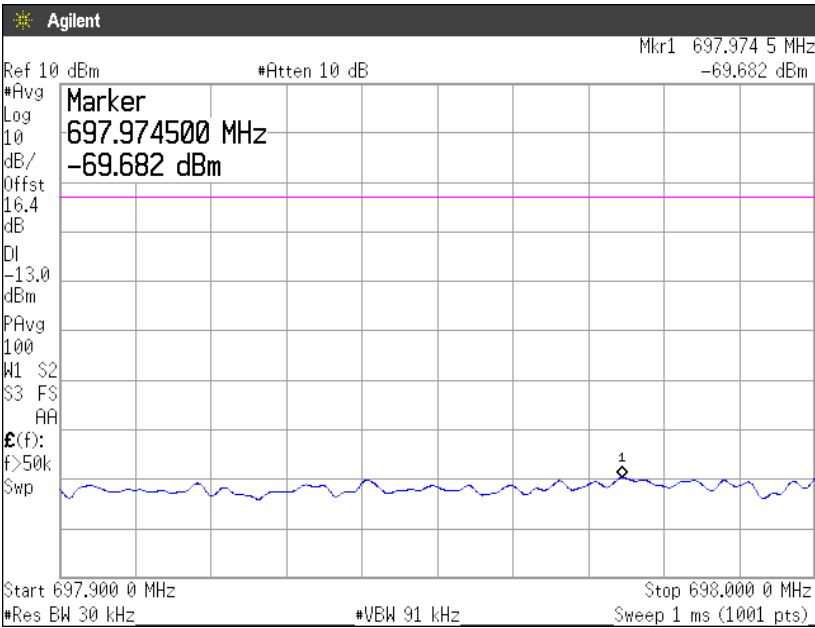
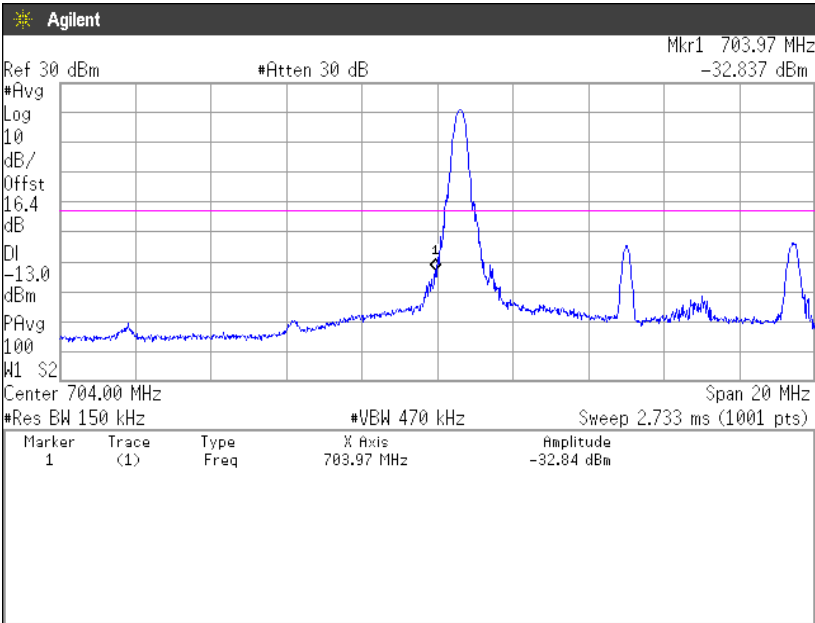






**16QAM, BW 10MHz, RB1-49**  
**Channel: High**

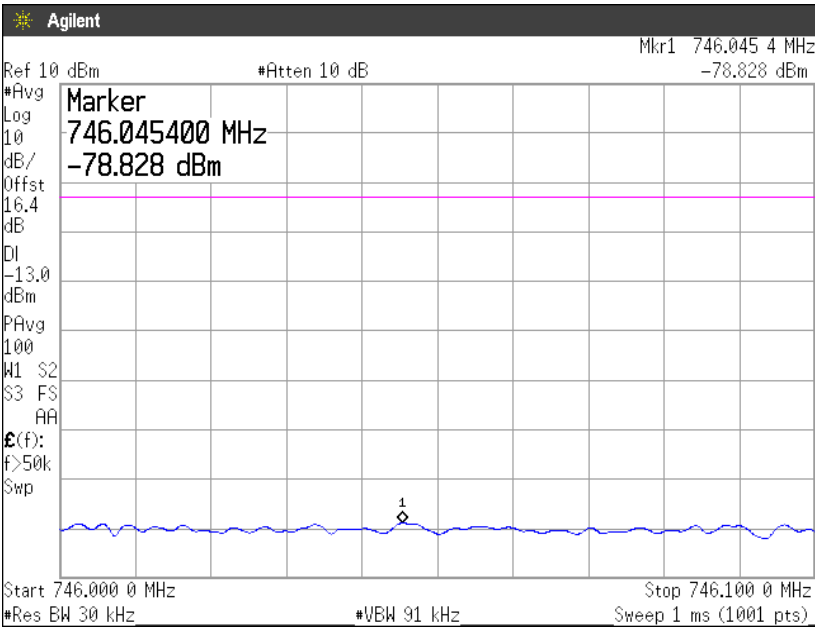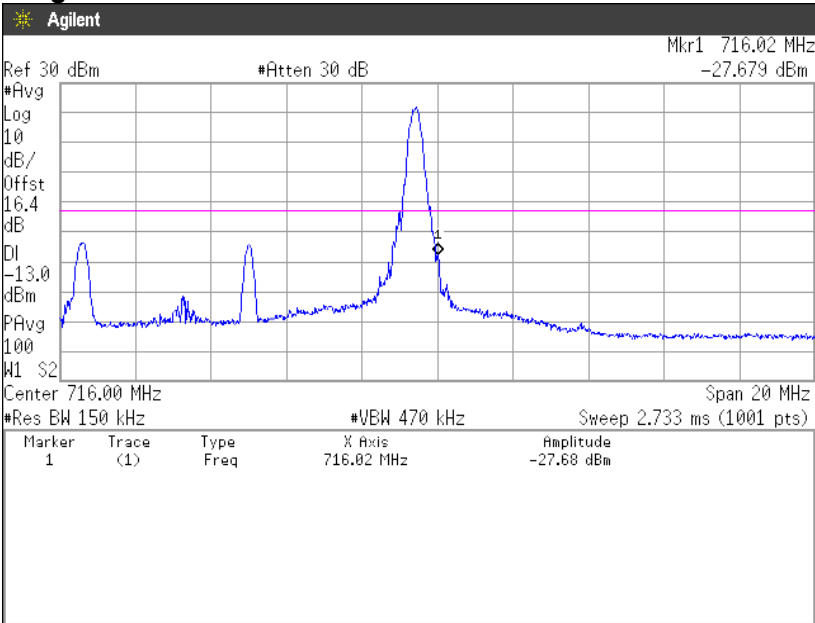

**16QAM, BW 10MHz, RB50-0**  
**Channel: Low**

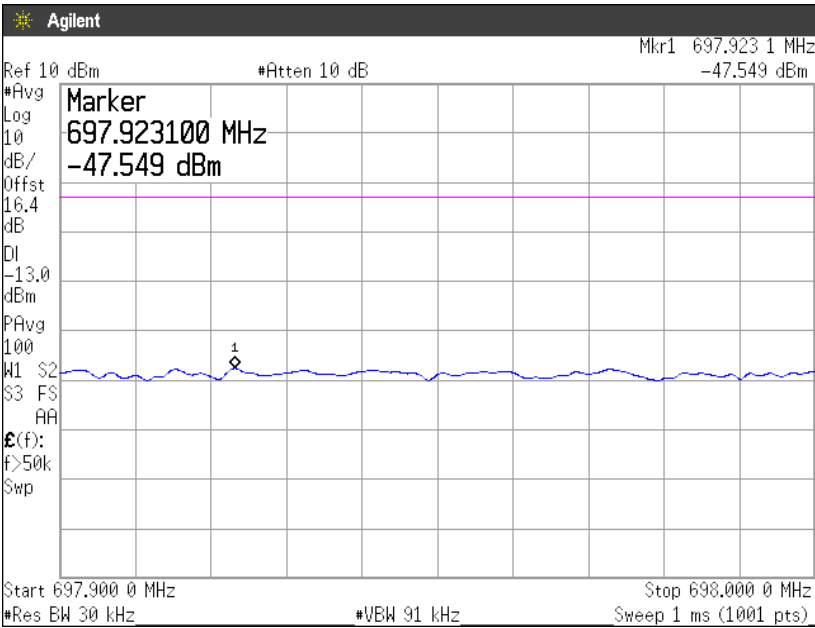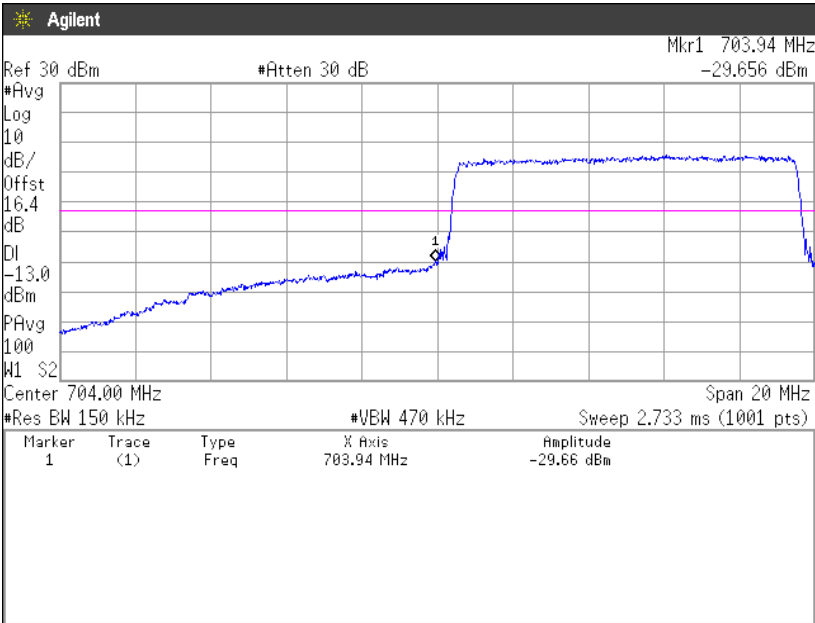


**16QAM, BW 10MHz, RB50-0**  
**Channel: High**

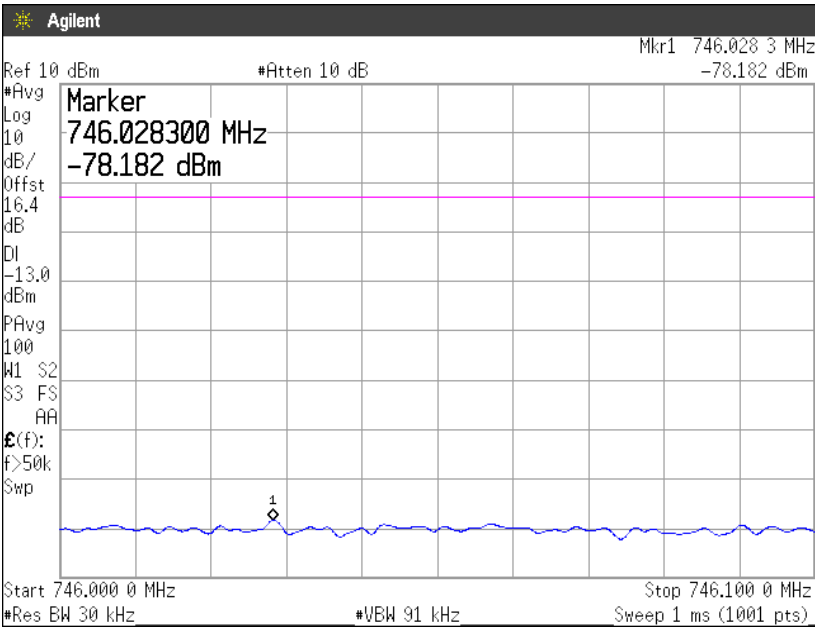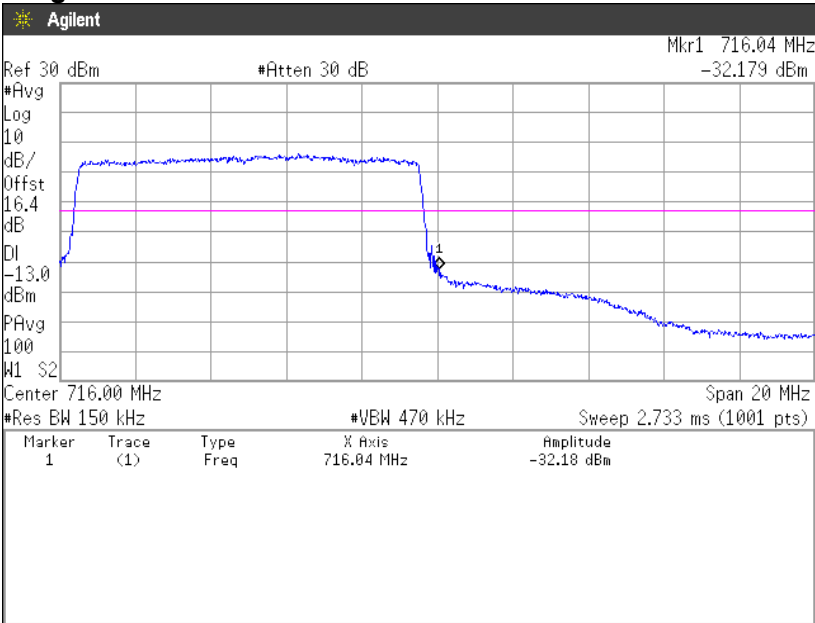


(Spurious Emissions)

Note: Conducted spurious test was measured in the worst case of conducted output power.


QPSK, BW 10MHz, RB1-25  
Channel: 23780  
30MHz-5GHz

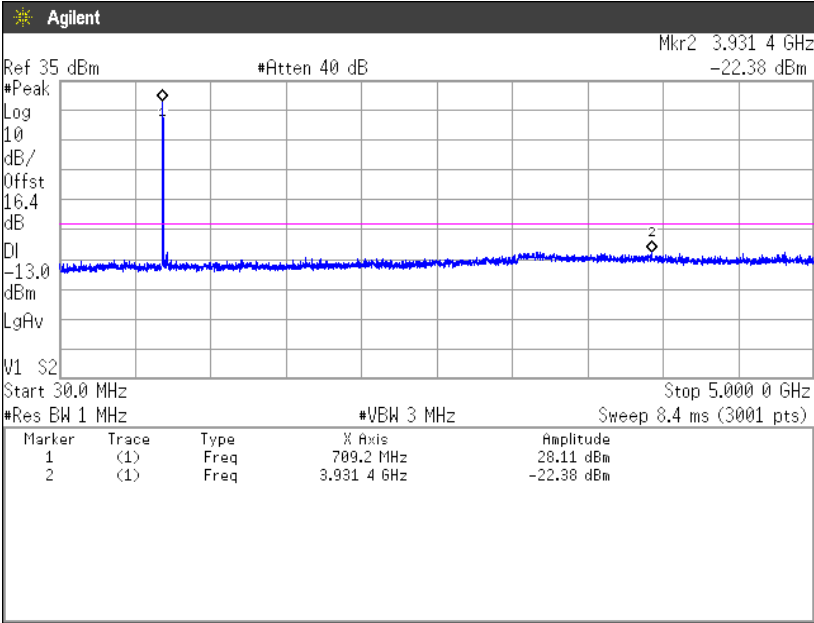


5GHz-10GHz

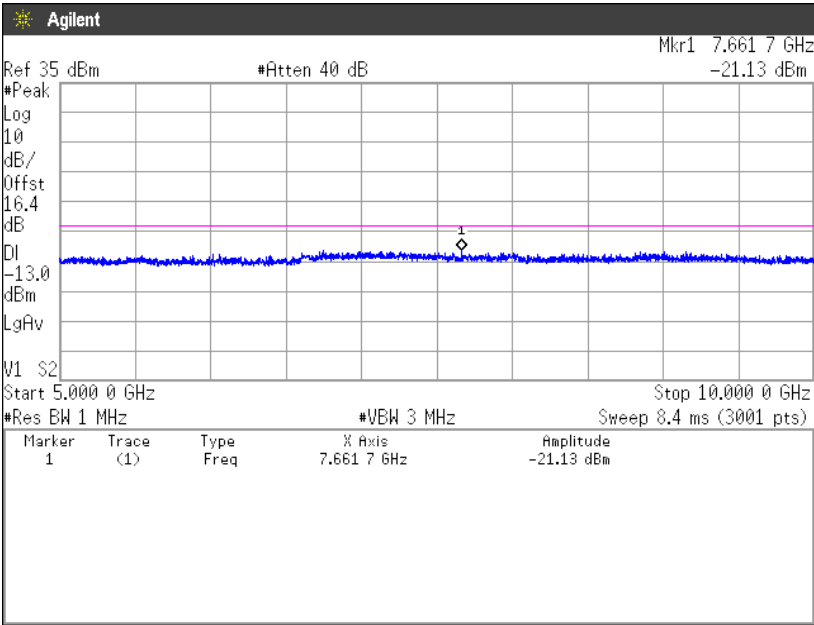


**Channel: 23790**  
**30MHz-5GHz**

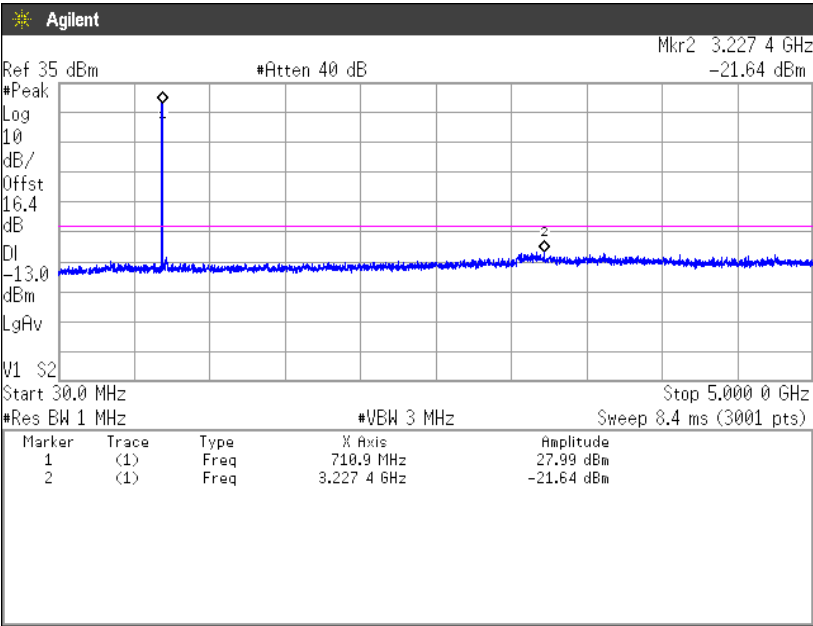


**5GHz-10GHz**

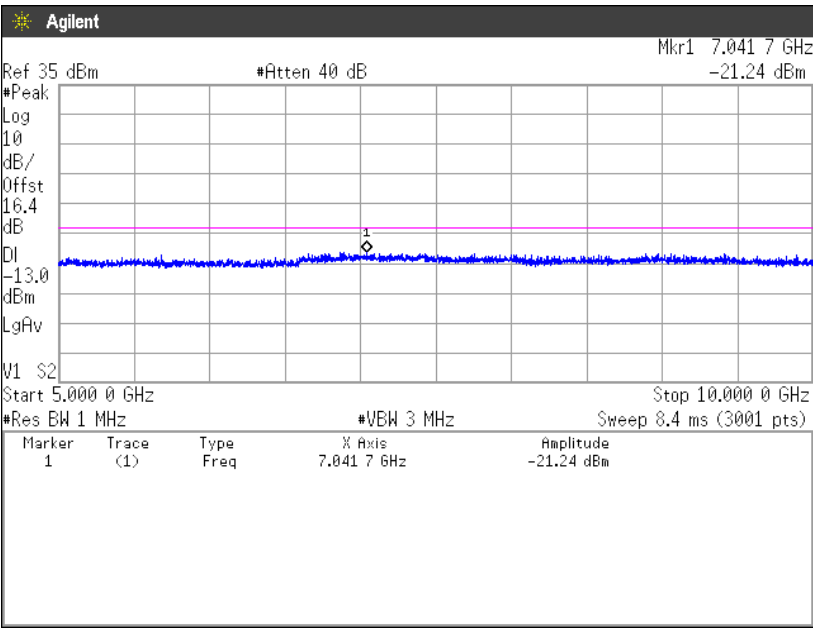


**Channel: 23800  
30MHz-5GHz**

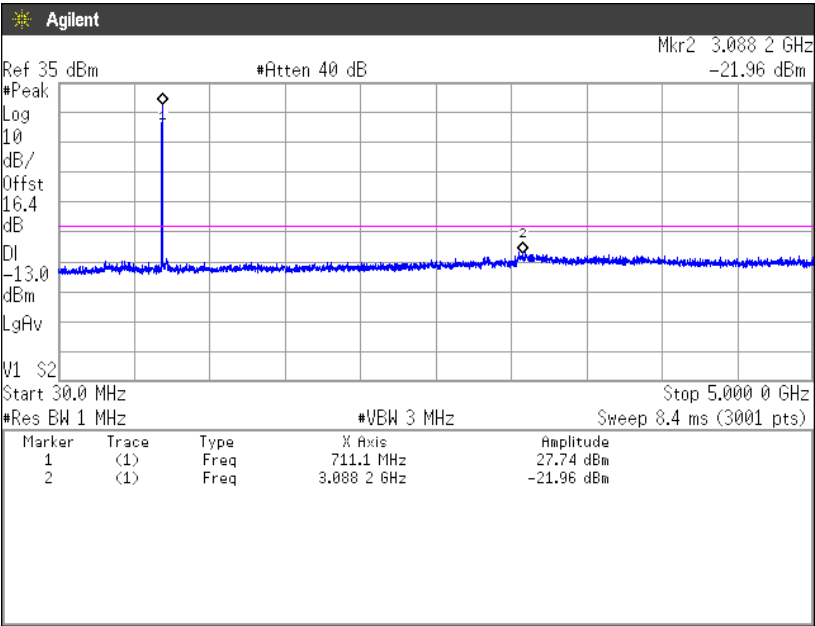


**5GHz-10GHz**

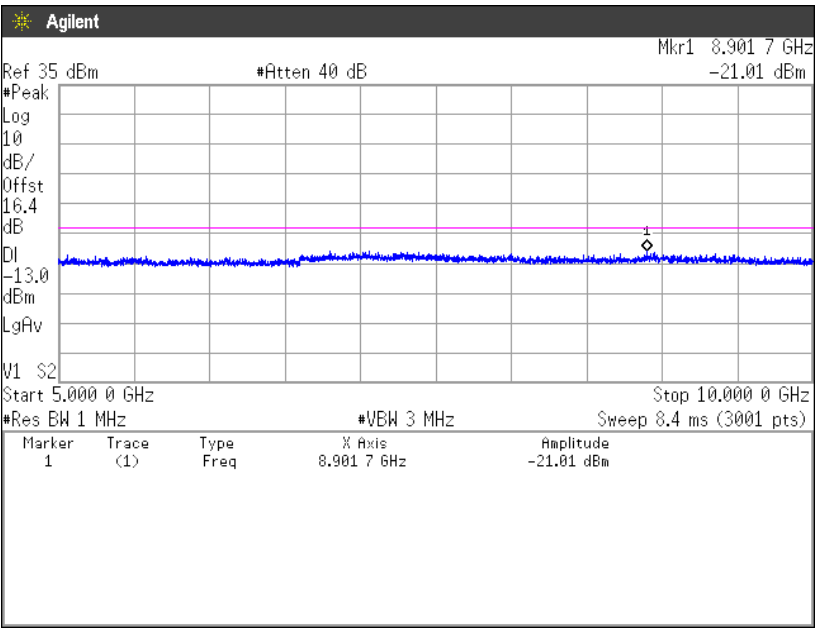


16QAM, BW 5MHz, RB1-12  
Channel: 23755  
30MHz-5GHz

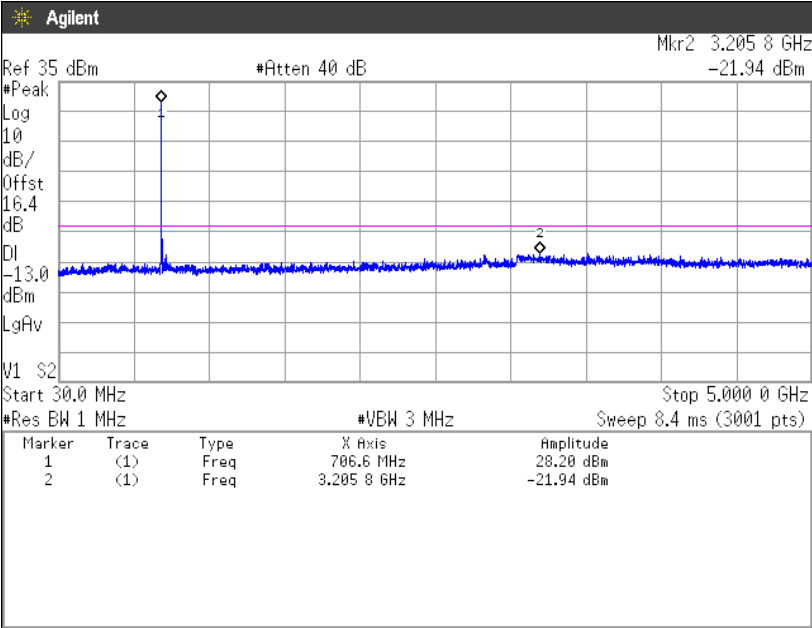


5GHz-10GHz

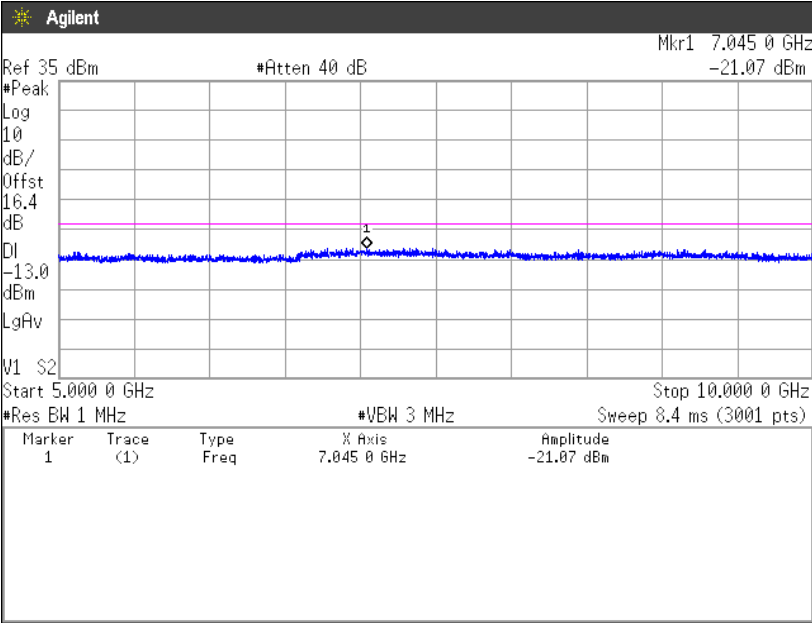

**Channel: 23790**  
**30MHz-5GHz**

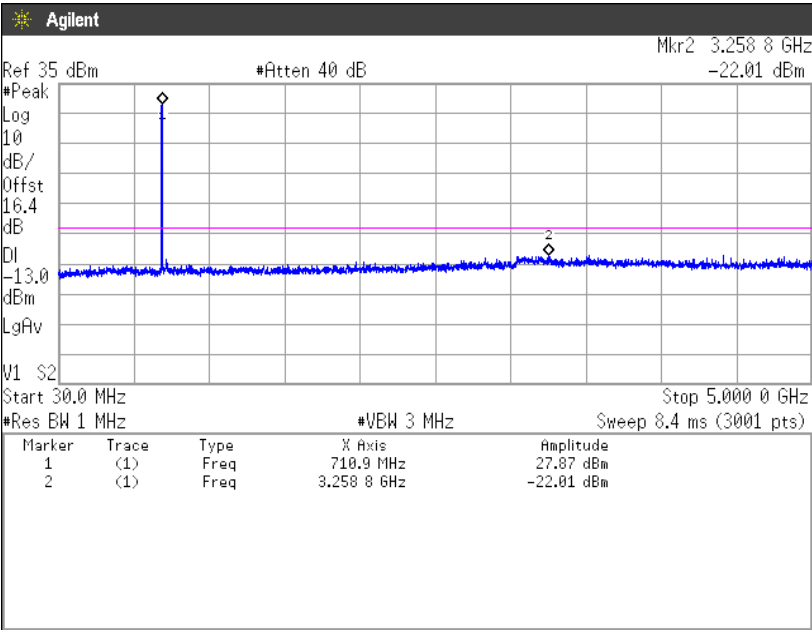


**5GHz-10GHz**

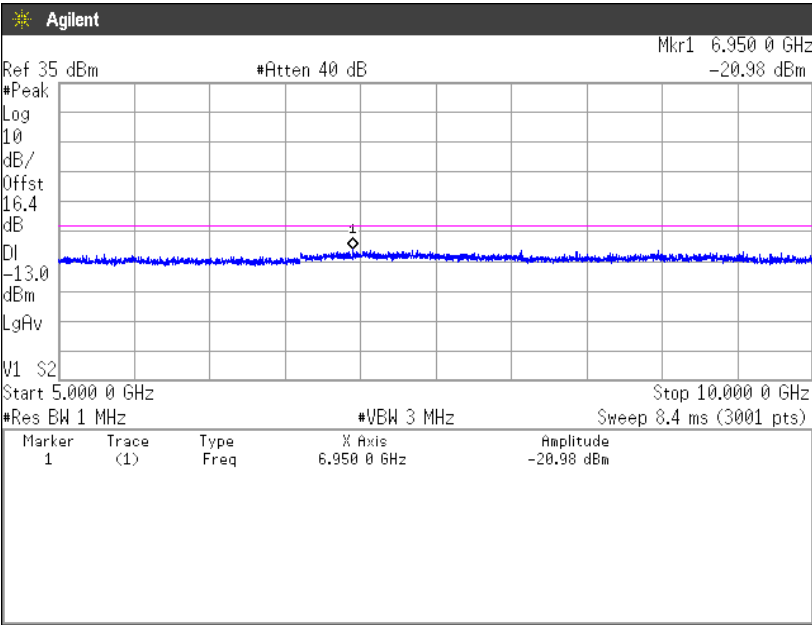




**Channel: 23825**  
**30MHz-5GHz**

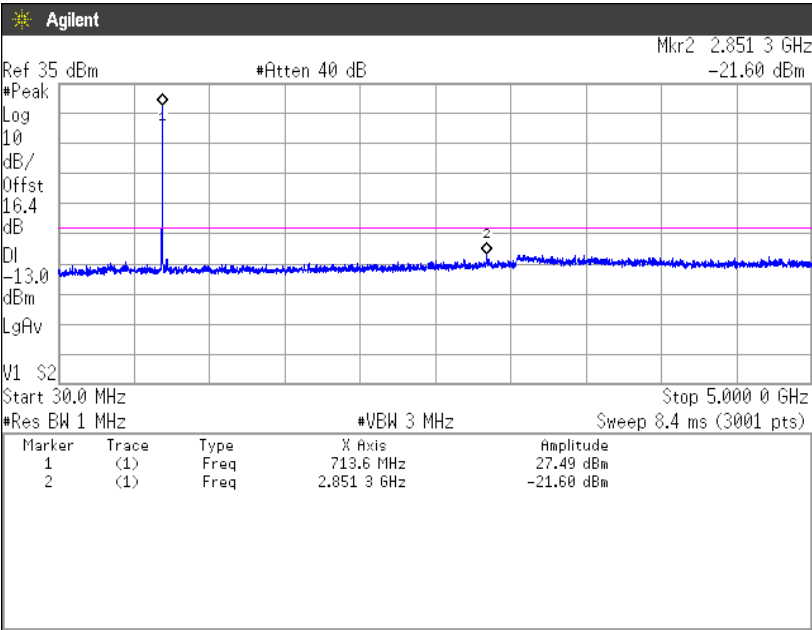

**5GHz-10GHz**

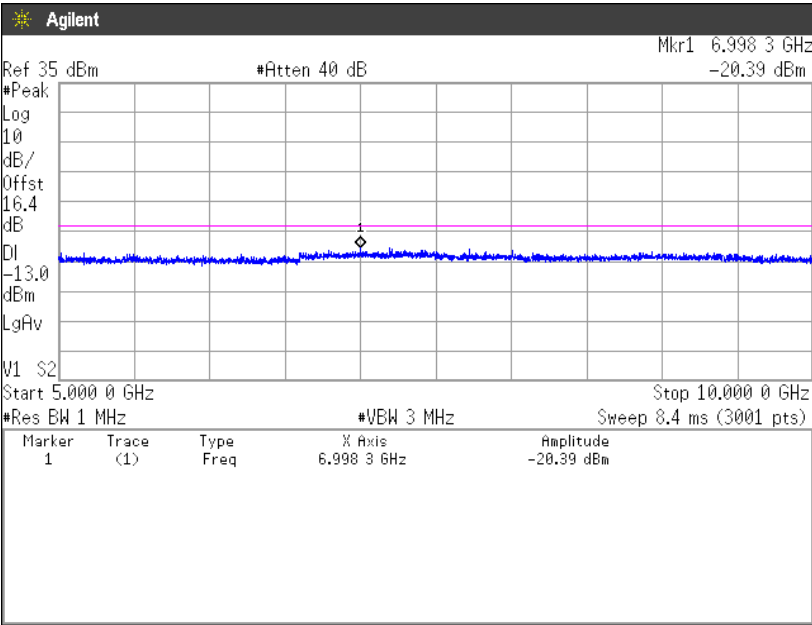

## 8. Radiated Emissions and Harmonic Emissions

### 8.1 Measurement procedure [FCC 27.53, 2.1053]

#### <Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Biconical antenna, Log periodic antenna and double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission. The frequency is investigated up to 20GHz.

#### <Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- a) RBW = 100kHz for below 1GHz and 1MHz for above 1GHz / VBW  $\geq 3 \times$  RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

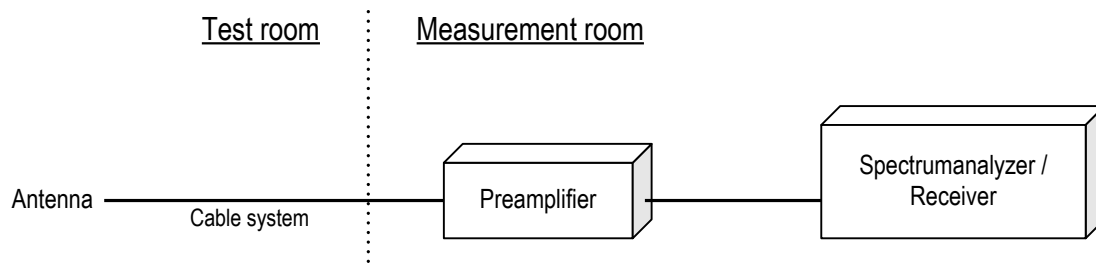

## 8.2 Calculation method

Result = S.G Reading – Cable loss + Antenna Gain

Margin = Limit – Result (ERP)

Example:

Limit @ 1413MHz : -13.0dBm

S.G Reading = -55.6dBm Cable loss = 1.0dB Ant. Gain = 5.9dBd

Result = -55.6 - 1.0 + 5.9 = -50.7dBm

Margin = -13.0 - (-50.7) = 37.7dB

## 8.3 Limit

-13dBm or less

#### 8.4 Test data

|             |   |                          |               |   |                       |
|-------------|---|--------------------------|---------------|---|-----------------------|
| Date        | : | April 4, 2017            | Test engineer | : | <u>Tadahiro Seino</u> |
| Temperature | : | 22.3 [°C]                |               |   |                       |
| Humidity    | : | 26.3 [%]                 |               |   |                       |
| Test place  | : | 3m Semi-anechoic chamber |               |   |                       |
|             |   |                          |               |   |                       |
| Date        | : | April 5, 2017            | Test engineer | : | <u>Tadahiro Seino</u> |
| Temperature | : | 22.3 [°C]                |               |   |                       |
| Humidity    | : | 21.6 [%]                 |               |   |                       |
| Test place  | : | 3m Semi-anechoic chamber |               |   |                       |
|             |   |                          |               |   |                       |
| Date        | : | April 12, 2017           | Test engineer | : | <u>Tadahiro Seino</u> |
| Temperature | : | 24.2 [°C]                |               |   |                       |
| Humidity    | : | 24.7 [%]                 |               |   |                       |
| Test place  | : | 3m Semi-anechoic chamber |               |   |                       |

**[LTE Band X VII]  
QPSK, BW 5MHz  
Channel: 23755**

| H/V | Frequency<br>[MHz] | S.A Reading<br>[dBm] | S.G Reading<br>[dBm] | Cable loss<br>[dB] | Ant.Gain<br>[dBd] | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|-----|--------------------|----------------------|----------------------|--------------------|-------------------|-----------------|----------------|----------------|
| H   | 1413.4             | -52.8                | -56.3                | 1.0                | 5.9               | -51.3           | -13.0          | 38.3           |

**Channel: 23790**

| H/V | Frequency<br>[MHz] | S.A Reading<br>[dBm] | S.G Reading<br>[dBm] | Cable loss<br>[dB] | Ant.Gain<br>[dBd] | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|-----|--------------------|----------------------|----------------------|--------------------|-------------------|-----------------|----------------|----------------|
| H   | 1420.4             | -51.4                | -54.6                | 1.0                | 6.0               | -49.6           | -13.0          | 36.6           |

**Channel: 23825**

| H/V | Frequency<br>[MHz] | S.A Reading<br>[dBm] | S.G Reading<br>[dBm] | Cable loss<br>[dB] | Ant.Gain<br>[dBd] | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|-----|--------------------|----------------------|----------------------|--------------------|-------------------|-----------------|----------------|----------------|
| H   | 1427.0             | -50.8                | -53.2                | 1.0                | 6.1               | -48.1           | -13.0          | 35.1           |

**16QAM, BW 5MHz****Channel: 23755**

| H/V | Frequency<br>[MHz] | S.A Reading<br>[dBm] | S.G Reading<br>[dBm] | Cable loss<br>[dB] | Ant.Gain<br>[dBd] | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|-----|--------------------|----------------------|----------------------|--------------------|-------------------|-----------------|----------------|----------------|
| H   | 1413.4             | -53.2                | -58.3                | 1.0                | 5.9               | -53.3           | -13.0          | 40.3           |

**Channel: 23790**

| H/V | Frequency<br>[MHz] | S.A Reading<br>[dBm] | S.G Reading<br>[dBm] | Cable loss<br>[dB] | Ant.Gain<br>[dBd] | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|-----|--------------------|----------------------|----------------------|--------------------|-------------------|-----------------|----------------|----------------|
| H   | 1420.4             | -51.6                | -54.2                | 1.0                | 6.0               | -49.2           | -13.0          | 36.2           |

**Channel: 23825**

| H/V | Frequency<br>[MHz] | S.A Reading<br>[dBm] | S.G Reading<br>[dBm] | Cable loss<br>[dB] | Ant.Gain<br>[dBd] | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|-----|--------------------|----------------------|----------------------|--------------------|-------------------|-----------------|----------------|----------------|
| H   | 1427.4             | -51.2                | -53.8                | 1.0                | 6.1               | -48.7           | -13.0          | 35.7           |

**QPSK, BW 10MHz****Channel: 23780**

| H/V | Frequency<br>[MHz] | S.A Reading<br>[dBm] | S.G Reading<br>[dBm] | Cable loss<br>[dB] | Ant.Gain<br>[dBd] | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|-----|--------------------|----------------------|----------------------|--------------------|-------------------|-----------------|----------------|----------------|
| H   | 1418.3             | -53.4                | -55.8                | 1.0                | 6.0               | -50.8           | -13.0          | 37.8           |

**Channel: 23790**

| H/V | Frequency<br>[MHz] | S.A Reading<br>[dBm] | S.G Reading<br>[dBm] | Cable loss<br>[dB] | Ant.Gain<br>[dBd] | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|-----|--------------------|----------------------|----------------------|--------------------|-------------------|-----------------|----------------|----------------|
| H   | 1420.2             | -50.8                | -52.9                | 1.0                | 6.0               | -47.9           | -13.0          | 34.9           |

**Channel: 23800**

| H/V | Frequency<br>[MHz] | S.A Reading<br>[dBm] | S.G Reading<br>[dBm] | Cable loss<br>[dB] | Ant.Gain<br>[dBd] | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|-----|--------------------|----------------------|----------------------|--------------------|-------------------|-----------------|----------------|----------------|
| H   | 1422.2             | -49.9                | -51.8                | 1.0                | 6.0               | -46.8           | -13.0          | 33.8           |

**16QAM, BW 10MHz****Channel: 23780**

| H/V | Frequency<br>[MHz] | S.A Reading<br>[dBm] | S.G Reading<br>[dBm] | Cable loss<br>[dB] | Ant.Gain<br>[dBd] | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|-----|--------------------|----------------------|----------------------|--------------------|-------------------|-----------------|----------------|----------------|
| H   | 1418.2             | -52.3                | -58.3                | 1.0                | 6.0               | -53.3           | -13.0          | 40.3           |

**Channel: 23790**

| H/V | Frequency<br>[MHz] | S.A Reading<br>[dBm] | S.G Reading<br>[dBm] | Cable loss<br>[dB] | Ant.Gain<br>[dBd] | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|-----|--------------------|----------------------|----------------------|--------------------|-------------------|-----------------|----------------|----------------|
| H   | 1420.2             | -52.0                | -58.2                | 1.0                | 6.0               | -53.2           | -13.0          | 40.2           |

**Channel: 23800**


| H/V | Frequency<br>[MHz] | S.A Reading<br>[dBm] | S.G Reading<br>[dBm] | Cable loss<br>[dB] | Ant.Gain<br>[dBd] | Result<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|-----|--------------------|----------------------|----------------------|--------------------|-------------------|-----------------|----------------|----------------|
| H   | 1422.2             | -50.1                | -54.1                | 1.0                | 6.0               | -49.1           | -13.0          | 36.1           |

## 9. Frequency Stability

### 9.1 Measurement procedure [FCC 27.54, 2.1055]

The EUT was placed inside of a constant temperature chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. The frequency drift was measured with the normal Temperature and voltage tolerance and it is presented as the ppm unit.

- Test configuration

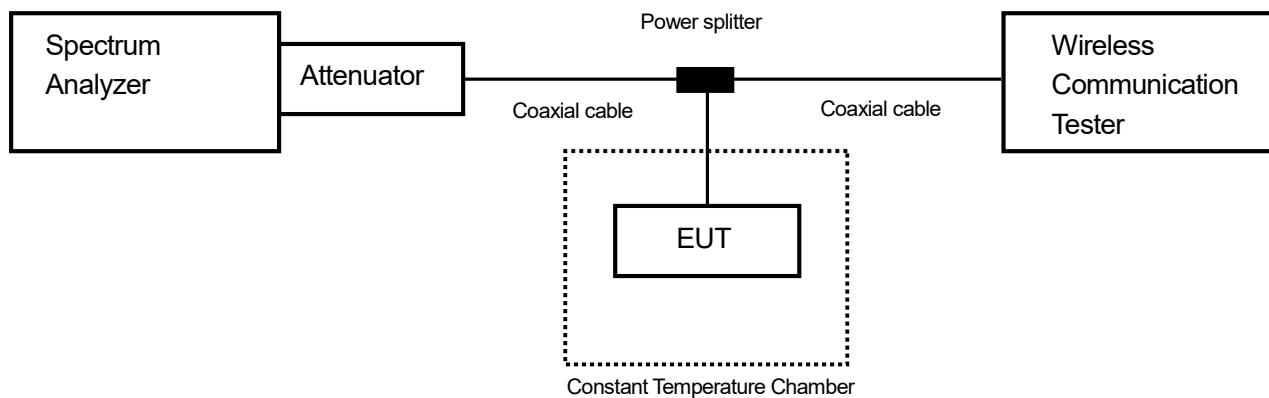

### 9.2 Limit

$\pm 2.5\text{ppm}$

### 9.3 Measurement result

Date : March 16, 2017

Temperature : 23.1 [°C]

Humidity : 47.7 [%]

Test place : Shielded room No.4

Test engineer :

Tadahiro Seino

#### [LTE Band X VII]

(Channel: 23790)

| Limit: $\pm 0.00025\% = \pm 2.5\text{ppm}$ |                     |                                |                              |                |        |
|--------------------------------------------|---------------------|--------------------------------|------------------------------|----------------|--------|
| Power Supply<br>[V]                        | Temperature<br>[°C] | Measurements Frequency<br>[Hz] | Frequency Tolerance<br>[ppm] | Limit<br>[ppm] | Result |
| 3.80                                       | 25(Ref.)            | 709,999,998                    | 0.00000                      | $\pm 2.5$      | Pass   |
|                                            | 50                  | 709,999,997                    | -0.00042                     | $\pm 2.5$      | Pass   |
|                                            | 40                  | 709,999,997                    | -0.00110                     | $\pm 2.5$      | Pass   |
|                                            | 30                  | 709,999,997                    | -0.00115                     | $\pm 2.5$      | Pass   |
|                                            | 20                  | 710,000,003                    | 0.00825                      | $\pm 2.5$      | Pass   |
|                                            | 10                  | 710,000,003                    | 0.00792                      | $\pm 2.5$      | Pass   |
|                                            | 0                   | 710,000,003                    | 0.00732                      | $\pm 2.5$      | Pass   |
|                                            | -10                 | 710,000,004                    | 0.00904                      | $\pm 2.5$      | Pass   |
|                                            | -20                 | 710,000,003                    | 0.00817                      | $\pm 2.5$      | Pass   |
|                                            | -30                 | 709,999,996                    | -0.00162                     | $\pm 2.5$      | Pass   |
| 3.42                                       | 25                  | 709,999,997                    | -0.00110                     | $\pm 2.5$      | Pass   |
| 4.18                                       | 25                  | 709,999,996                    | -0.00242                     | $\pm 2.5$      | Pass   |

Calculation;

Frequency Tolerance (ppm) = Measurements Frequency (Hz) – Reference Frequency (Hz) / Reference Frequency (Hz) x 1000000



## 10. Uncertainty of measurement

Expanded uncertainties stated are calculated with a coverage Factor  $k=2$ .

Please note that these results are not taken into account when determining compliance or non-compliance with test result.

| Test item                           | Measurement uncertainty |
|-------------------------------------|-------------------------|
| Conducted emission at mains port    | $\pm 3.0\text{dB}$      |
| Radiated emission (9kHz – 30MHz)    | $\pm 4.4\text{dB}$      |
| Radiated emission (30MHz – 1000MHz) | $\pm 4.5\text{dB}$      |
| Radiated emission (1000MHz – 26GHz) | $\pm 3.9\text{dB}$      |

## 11. Laboratory Information

### 1. Location

Name: Yonezawa Testing Center  
 Address: 5-4149-7, Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan  
 Phone: +81-238-28-2881  
 Fax: +81-238-28-2888

### 2. Accreditation and Registration

- 1) NVLAP  
LAB CODE: 200306-0
- 2) VLAC  
Accreditation No.: VLAC-013
- 3) BSMI  
Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

#### 4) Industry Canada

| Site number | Facility                       | Expiration date |
|-------------|--------------------------------|-----------------|
| 4224A-4     | 3m Semi-anechoic chamber       | 2017-12-03      |
| 4224A-5     | 10m Semi-anechoic chamber No.1 | 2017-12-03      |
| 4224A-6     | 10m Semi-anechoic chamber No.2 | 2019-12-14      |

#### 5) VCCI Council

| Registration number | Expiration date |
|---------------------|-----------------|
| A-0166              | 2017-07-03      |

## Appendix A. Test equipment

### Antenna port conducted test

| Equipment                        | Company              | Model No.        | Serial No.             | Cal. Due      | Cal. Date     |
|----------------------------------|----------------------|------------------|------------------------|---------------|---------------|
| Spectrum analyzer                | Agilent Technologies | E4440A           | US40420937             | Jul. 31, 2017 | Jul. 15, 2016 |
| Microwave cable                  | RS                   | YH-13S5          | N/A(S403)              | May 31, 2017  | May 24, 2016  |
| Attenuator                       | Weinschel            | 56-10            | J4993                  | Nov. 30, 2017 | Nov. 1, 2016  |
| Microwave cable                  | SUHNER               | SUCOFLEX104/1.5m | 322087/4               | Jul. 31, 2017 | Jul. 20, 2016 |
| Power divider                    | ANRITSU              | K240B            | 020205                 | Jul. 31, 2017 | Jul. 20, 2016 |
| Wideband Radio Frequency Tester  | ROHDE&SCHWARZ        | CMW500           | 1201.0002K50-126079-rh | Oct. 31, 2017 | Oct. 7, 2016  |
| Temperature and humidity chamber | ESPEC                | PL1KP            | 14007261               | Jan. 31, 2018 | Jan. 20, 2017 |

### Radiated emission

| Equipment                       | Company              | Model No.         | Serial No.             | Cal. Due      | Cal. Date     |
|---------------------------------|----------------------|-------------------|------------------------|---------------|---------------|
| EMI Receiver                    | ROHDE&SCHWARZ        | ESCI              | 100764                 | Aug. 31, 2017 | Aug. 19, 2016 |
| Spectrum analyzer               | Agilent Technologies | E4440A            | US40420937             | Jul. 31, 2017 | Jul. 15, 2016 |
| Preamplifier                    | ANRITSU              | MH648A            | M96057                 | Feb. 28, 2018 | Feb. 1, 2017  |
| Biconical antenna               | Schwarzbeck          | VHA9103/BBA9106   | 2155                   | Jun. 30, 2017 | Jun. 2, 2016  |
| Log periodic antenna            | Schwarzbeck          | UHALP9108A        | 0560                   | Jun. 30, 2017 | Jun. 2, 2016  |
| Attenuator                      | TME                  | CFA-01NPJ-6       | N/A(S275)              | Feb. 28, 2018 | Feb. 3, 2017  |
| Attenuator                      | TME                  | CFA-01NPJ-3       | N/A(S272)              | Feb. 28, 2018 | Feb. 2, 2017  |
| Preamplifier                    | TSJ                  | MLA-100M18-B02-40 | 1929118                | Feb. 28, 2018 | Feb. 3, 2017  |
| Attenuator                      | AEROFLEX             | 26A-10            | 081217-08              | May 31, 2017  | May 24, 2016  |
| Double ridged guide antenna     | EMCO                 | 3115              | 5205                   | Mar. 31, 2017 | Mar. 3, 2016  |
| Double ridged guide antenna     | EMCO                 | 3115              | 5205                   | Mar. 31, 2018 | Mar. 15, 2017 |
| Double ridged guide antenna     | ETS LINDGREN         | 3117              | 00052315               | Feb. 28, 2018 | Feb. 23, 2017 |
| Attenuator                      | Agilent Technologies | 8491B             | MY39268633             | Feb. 28, 2018 | Feb. 2, 2017  |
| Broad-Band Horn Antenna         | Schwarzbeck          | BBHA9170          | BBHA9170189            | Jun. 30, 2017 | Jun. 16, 2016 |
| Preamplifier                    | TSJ                  | MLA-1840-B03-35   | 1240332                | Jun. 30, 2017 | Jun. 16, 2016 |
| Notch Filter                    | Micro-Tronics        | BRM50706          | 003                    | Jul. 31, 2017 | Jul. 20, 2016 |
| High Pass Filter                | Micro-Tronics        | HPM50115          | 004                    | Jul. 31, 2017 | Jul. 20, 2016 |
| Signal generator                | ROHDE&SCHWARZ        | SMB100A           | 177525                 | Jun. 30, 2017 | Jun. 21, 2016 |
| RF power amplifier              | R&K                  | CGA020M602-2633R  | B40240                 | May 31, 2017  | May 10, 2016  |
| Microwave cable                 | SUHNER               | SUCOFLEX102/2m    | 31648                  | Mar. 31, 2018 | Mar. 13, 2017 |
| Dipole antenna                  | Schwarzbeck          | VHAP              | 1021                   | Oct. 31, 2017 | Oct. 2, 2015  |
| Dipole antenna                  | Schwarzbeck          | UHAP              | 993                    | Oct. 31, 2017 | Oct. 2, 2015  |
| Double ridged guide antenna     | EMCO                 | 3115              | 00058532               | Dec. 31, 2017 | Dec. 6, 2016  |
| Wideband Radio Frequency Tester | ROHDE&SCHWARZ        | CMW500            | 1201.0002K50-126079-rh | Oct. 31, 2017 | Oct. 7, 2016  |
| Microwave cable                 | SUHNER               | SUCOFLEX104/9m    | MY30037/4              | Feb. 28, 2018 | Feb. 3, 2017  |
|                                 |                      | SUCOFLEX104/1m    | my24610/4              | Feb. 28, 2018 | Feb. 3, 2017  |
|                                 |                      | SUCOFLEX104/8m    | SN MY30031/4           | Feb. 28, 2018 | Feb. 2, 2017  |
|                                 |                      | SUCOFLEX104/1.5m  | 322086/4               | May 31, 2017  | May 10, 2016  |
|                                 |                      | SUCOFLEX104/1.5m  | 317226/4               | May 31, 2017  | May 10, 2016  |
|                                 |                      | SUCOFLEX104/7m    | 41625/6                | Feb. 28, 2018 | Feb. 3, 2017  |
| PC                              | DELL                 | DIMENSION E521    | 75465BX                | N/A           | N/A           |
| Software                        | TOYO Corporation     | EP5/RE-AJ         | 0611193/V5.6.0         | N/A           | N/A           |
| Absorber                        | RIKEN                | PFP30             | N/A                    | N/A           | N/A           |
| 3m Semi an-echoic Chamber       | TOKIN                | N/A               | N/A(9002-NSA)          | May 31, 2017  | May 11, 2016  |
| 3m Semi an-echoic Chamber       | TOKIN                | N/A               | N/A(9002-SVSWR)        | May 31, 2017  | May 12, 2016  |

\*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.