

TEST REPORT

Report number : JPD-TR-17105-0

Issue date : May 15, 2017

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

FCC Part15 Subpart E

The test results are traceable to the international or national standards.

Applicant	: KYOCERA Corporation
Equipment under test (EUT)	: Mobile Phone
Model number	: DA58
FCC ID	: JOYDA58

Date of test : March 22, 23, 2017
April 12, 13, 14, 15, 17, 18, 19, 20, 24, 2017
Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center
5-4149-7, Hachimanpara, Yonezawa-shi,
Yamagata, 992-1128 Japan
Phone: +81-238-28-2881 Fax: +81-238-28-2888
Test results : Complied

The results in this report are applicable only to the equipment tested.

This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.

This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, ILAC-MRA, or any agency of the federal government.

Tested by : Taiki Watanabe Tadahiro Seino
Taiki Watanabe Tadahiro Seino

Tested by : Hikaru Shibata
Hikaru Shibata

Approved by : Hiroaki Suzuki
Hiroaki Suzuki
Lab Manager of RF Lab



Table of contents

	Page
1. Summary of Test	4
1.1 Purpose of test	4
1.2 Standards	4
1.3 List of applied test to the EUT	4
1.4 Modification to the EUT by laboratory	4
2. Equipment Under Test	5
2.1 General Description of equipment	5
2.2 EUT information	5
2.3 Variation of the family model(s)	6
2.4 Operating channels and frequencies	6
2.5 Operating mode	8
2.6 Operating mode	8
3. Configuration of equipment	9
3.1 Equipment(s) used	9
3.2 Cable(s) used	9
3.3 System configuration	9
4. 26dB Bandwidth and 99% Occupied Bandwidth	10
4.1 Measurement procedure	10
4.2 Limit	10
4.3 Measurement result	10
4.4 Trace data	12
5. Maximum Conducted Output Power	23
5.1 Measurement procedure	23
5.2 Limit	23
5.3 Measurement result	25
5.4 Trace data	27
6. Peak Power Spectral Density	38
6.1 Measurement procedure	38
6.2 Limit	38
6.3 Measurement result	39
6.4 Trace data	41
7. Radiated Emissions (Restricted Bands of Operation)	52
7.1 Measurement procedure	52
7.2 Calculation method	53
7.3 Limit	54
7.4 Test data	55
8. Frequency Stability	141
8.1 Measurement procedure	141
8.2 Limit	141
8.3 Measurement result	142
9. AC Power Line Conducted Emissions	144
9.1 Measurement procedure	144



Zacta

9.2 Calculation method.....	144
9.3 Limit.....	144
9.4 Test data.....	145
10. Duty Cycle.....	148
10.1 Measurement procedure.....	148
10.2 Limit.....	148
10.3 Measurement result.....	148
10.4 Trace data	151
11. Antenna requirement.....	156
12. Uncertainty of measurement.....	157
13. Laboratory Information	158
Appendix A. Test equipment	159

1. Summary of Test

1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 15 Subpart E.

1.2 Standards

CFR47 FCC Part 15 Subpart E

1.2.1 Test Methods

ANSI C63.10-2013, KDB789033 D02 General UNII Test Procedures New Rules v01r03

1.2.2 Deviation from standards

None

1.3 List of applied test to the EUT

Test items Section	Test items	Condition	Result
15.407(a)	26dB Bandwidth	Conducted	PASS
15.407(a)	Maximum Conducted Output Power	Conducted	PASS
15.407(a)	Peak Power Spectral Density	Conducted	PASS
15.407(b) 15.205 15.209	Radiated emissions (Restricted Bands of Operation)	Radiated	PASS
15.407(g)	Frequency Stability	Conducted	PASS
15.207	AC Power Line Conducted Emissions	Conducted	PASS

1.3.1 Test set up

Table-Top

1.4 Modification to the EUT by laboratory

None

2. Equipment Under Test

2.1 General Description of equipment

EUT is the Mobile Phone.

2.2 EUT information

Applicant	: KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment under test	: Mobile Phone
Trade name	: Kyocera
Model number	: DA58
Serial number	: N/A
EUT condition	: Pre-Production
Power ratings	: Battery: DC 3.8V
Size	: (W) 71.0 × (D) 13.6 × (H) 145.0 mm
Environment	: Indoor and Outdoor use
Terminal limitation	: -20°C to 60°C
RF Specification Protocol	: IEEE802.11a, IEEE802.11n(HT20), IEEE802.11n(HT40) IEEE802.11ac(HT20), IEEE802.11ac(HT40), IEEE802.11ac(HT80)
Frequency range	: IEEE802.11a/n/ac(HT20): 5180MHz-5320MHz, 5500MHz-5700MHz IEEE802.11n/ac(HT40): 5190MHz-5310MHz, 5510MHz-5670MHz IEEE802.11ac(HT80): 5210MHz, 5290MHz, 5530MHz, 5610MHz
Number of RF Channels	: IEEE802.11a/n/ac(HT20): 19 Channels IEEE802.11n/ac(HT40): 9 Channels IEEE802.11ac(HT80): 4 Channels
Modulation type	: IEEE802.11a/n/ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Data rate	: IEEE802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE802.11n (HT20 LGI): 6.5, 13, 19.5, 26, 39, 52, 58.5, 65Mbps IEEE802.11n (HT20 SGI): 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65, 72.2Mbps IEEE802.11ac (HT20 LGI): 6.5, 13, 19.5, 26, 39, 52, 58.5, 65, 78, 86.5Mbps IEEE802.11ac (HT20 SGI): 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65, 72.2, 86.6, 96.1Mbps IEEE802.11n (HT40 LGI): 13.5, 27, 40.5, 54, 81, 108, 121.5, 135Mbps IEEE802.11n (HT40 SGI): 15, 30, 45, 60, 90, 120, 135, 150Mbps IEEE802.11ac (HT40 LGI): 13.5, 27, 40.5, 54, 81, 108, 121.5, 135, 162, 180Mbps IEEE802.11ac (HT40 SGI): 15, 30, 45, 60, 90, 120, 135, 150, 180, 200Mbps IEEE802.11ac (HT80 LGI): 29.3, 58.5, 87.8, 117, 175.5, 234, 263.3, 292.6, 351, 390Mbps IEEE802.11ac (HT80 SGI): 32.5, 65, 97.5, 130, 195, 260, 292.5, 325, 390, 433.3Mbps

Channel separation : IEEE802.11a/n/ac (HT20): 20MHz
IEEE802.11n/ac (HT40): 40MHz
IEEE802.11ac (HT80): 80MHz

Output power : 30.799mW (IEEE802.11a)
31.944mW (IEEE802.11n: HT20)
21.271mW (IEEE802.11n: HT40)
18.878mW (IEEE802.11ac: HT80)

Antenna type : Internal antenna

Antenna gain : 5.15-5.25GHz band: -5.4dBi
5.25-5.35GHz band: -4.8dBi
5.47-5.725GHz band: -6.4dBi

2.3 Variation of the family model(s)

Not applicable

2.4 Operating channels and frequencies

[IEEE802.11a/n/ac (HT20)]

Channel	Frequency [MHz]
36	5180
40	5200
44	5220
48	5240
52	5260
56	5280
60	5300
64	5320
100	5500
104	5520
108	5540
112	5560
116	5580
120	5600
124	5620
128	5640
132	5660
136	5680
140	5700



Zacta

[IEEE802.11n/ac (HT40)]

Channel	Frequency [MHz]
38	5190
46	5230
54	5270
62	5310
102	5510
110	5550
118	5590
126	5630
134	5670

[IEEE802.11ac (HT80)]

Channel	Frequency [MHz]
42	5210
58	5290
106	5530
122	5610

2.5 Operating mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Band	IEEE802.11a/n/ac (HT20)		IEEE802.11n/ac (HT40)		IEEE802.11ac (HT80)	
	Channel	Frequency [MHz]	Channel	Frequency [MHz]	Channel	Frequency [MHz]
5.2GHz Band	36	5180	38	5190	42	5210
	40	5200	-	-	-	-
	48	5240	46	5230	-	-
5.3GHz Band	52	5260	54	5270	58	5290
	56	5280	-	-	-	-
	64	5320	62	5310	-	-
5.6GHz Band	100	5500	102	5510	106	5530
	116	5580	110	5550	122	5610
	140	5700	134	5670	-	-

The pre-test has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

Band	Modulation Type	Data Rate
5.2GHz Band	IEEE802.11a: OFDM	6Mbps
	IEEE802.11n (HT20): OFDM	MCS0 (6.5Mbps)
	IEEE802.11n (HT40): OFDM	MCS0 (13.5Mbps)
	IEEE802.11ac (HT80): OFDM	MCS0 (29.3Mbps)
5.3GHz Band	IEEE802.11a: OFDM	6Mbps
	IEEE802.11n (HT20): OFDM	MCS0 (6.5Mbps)
	IEEE802.11n (HT40): OFDM	MCS0 (13.5Mbps)
	IEEE802.11ac (HT80): OFDM	MCS0 (29.3Mbps)
5.6GHz Band	IEEE802.11a: OFDM	6Mbps
	IEEE802.11n (HT20): OFDM	MCS0 (6.5Mbps)
	IEEE802.11n (HT40): OFDM	MCS0 (13.5Mbps)
	IEEE802.11ac (HT80): OFDM	MCS0 (29.3Mbps)

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in Y axis and the worst case recorded.

2.6 Operating mode

[Tx mode]

- i) Test program setup to the DM tool
- ii) Select a Test mode
Operating frequency: 5.2GHz Band, 5.3GHz Band, 5.6GHz Band
- iii) Start test mode

[Rx mode]

- i) Test program setup to the DM tool
- ii) Select a Test mode
Operating frequency: 5.2GHz Band, 5.3GHz Band, 5.6GHz Band
- iii) Start test mode

3. Configuration of equipment

3.1 Equipment(s) used

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	Mobile Phone	KYOCERA	DA58	N/A	JOYDA58	EUT
2	AC Adapter	au	N/A	N/A	N/A	*


*: AC power line Conducted Emission Test.

3.2 Cable(s) used

No.	Cable	Length[m]	Shield	Connector	Comment
a	Micro USB cable(for AC Adapter)	1.0	Yes	Metal	*

*: AC power line Conducted Emission Test.

3.3 System configuration

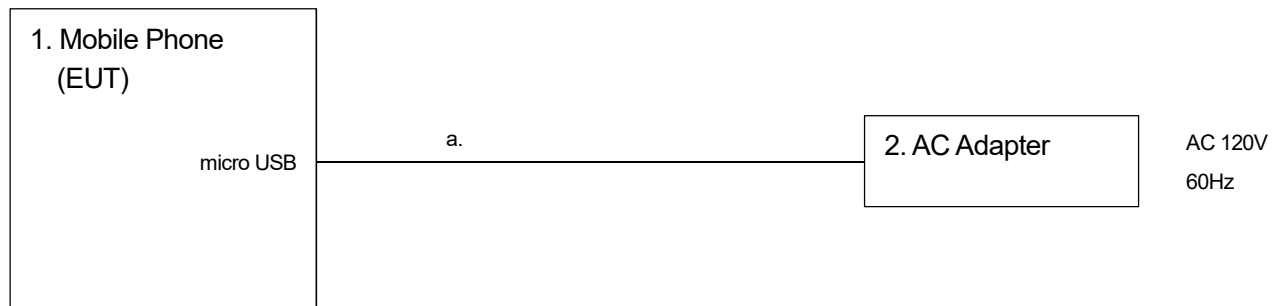

Note1: Numbers assigned to equipment or cables on this diagram correspond to the list in "3.1 Equipment(s) used" and "3.2 Cable(s) used".

4. 26dB Bandwidth and 99% Occupied Bandwidth

4.1 Measurement procedure

[FCC 15.407(a), KDB 789033 D02, Section C, D]

The 26dB bandwidth and 99% occupied bandwidth is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- RBW=200kHz/430kHz/820kHz, VBW=620kHz/1.3MHz/2.4MHz, Span=40MHz/80MHz/160MHz
- Sweep=auto, Detector=Peak, Trace mode=Max hold


The EUT was set to operate with following conditions.

- 5.2GHz Band, 5.3GHz Band, 5.6GHz Band

The test mode of EUT is as follows.

- Tx mode

- Test configuration



4.2 Limit

None

4.3 Measurement result

Date : March 22, 2017
 Temperature : 23.8 [°C]
 Humidity : 48.2 [%]
 Test place : Shielded room No.4

Test engineer :
 Tadahiro Seino


Mode	Band	Channel	Frequency (MHz)	26dB bandwidth (MHz)	99% Occupied bandwidth (MHz)
802.11a	5.2GHz Band	36	5180	22.008	16.7202
		40	5200	22.026	16.7871
		48	5240	22.124	16.7516
	5.3GHz Band	52	5260	21.853	16.7388
		56	5280	21.631	16.7519
		64	5320	21.638	16.7378
	5.6GHz Band	100	5500	22.112	16.8448
		116	5580	21.811	16.7879
		140	5700	21.808	16.7247

Mode	Band	Channel	Frequency (MHz)	26dB bandwidth (MHz)	99% Occupied bandwidth (MHz)
802.11n (20MHz)	5.2GHz Band	36	5180	22.235	17.8334
		40	5200	22.376	17.8262
		48	5240	22.031	17.8139
	5.3GHz Band	52	5260	22.440	17.8181
		56	5280	22.363	17.8359
		64	5320	21.920	17.8195
	5.6GHz Band	100	5500	21.907	17.8377
		116	5580	22.222	17.8471
		140	5700	22.301	17.8475


Mode	Band	Channel	Frequency (MHz)	26dB bandwidth (MHz)	99% Occupied bandwidth (MHz)
802.11n (40MHz)	5.2GHz Band	38	5190	43.788	36.1808
		46	5230	42.981	36.1031
	5.3GHz Band	54	5270	43.885	36.2026
		62	5310	43.710	36.1612
	5.6GHz Band	102	5510	43.216	36.1511
		110	5550	43.309	36.1648
		134	5670	43.482	36.1503

Mode	Band	Channel	Frequency (MHz)	26dB bandwidth (MHz)	99% Occupied bandwidth (MHz)
802.11ac (80MHz)	5.2GHz Band	42	5210	84.290	74.6361
	5.3GHz Band	58	5290	83.558	74.5783
	5.6GHz Band	106	5530	83.577	74.6020
		122	5610	83.168	74.6116


4.4 Trace data
[IEEE802.11a]
(5.2GHz Band)
Channel: 36

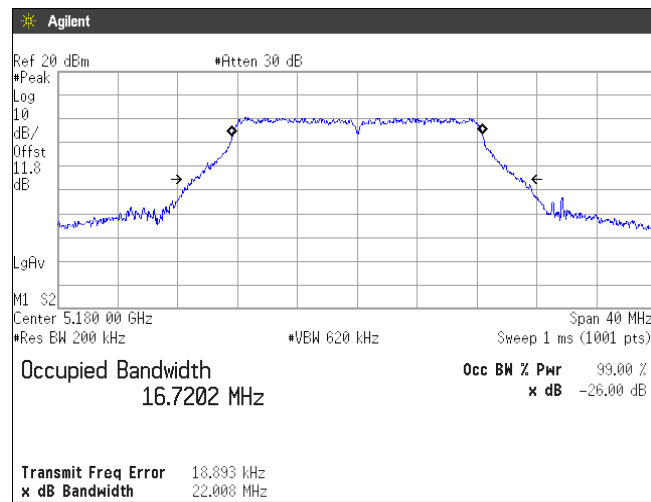

Channel: 40

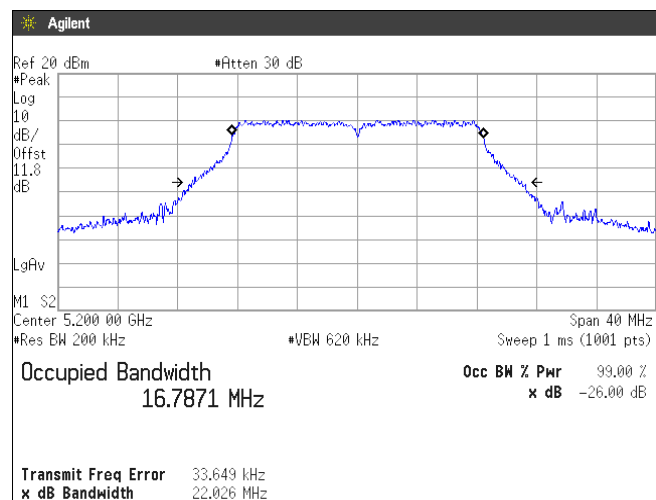


Channel: 48

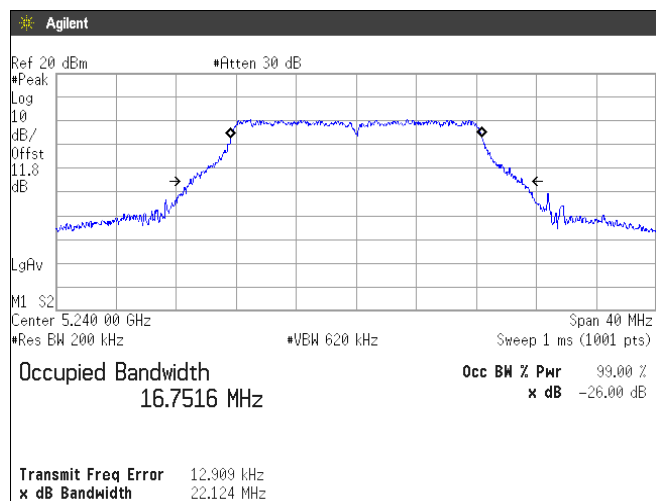


(5.3GHz Band)


Channel: 52

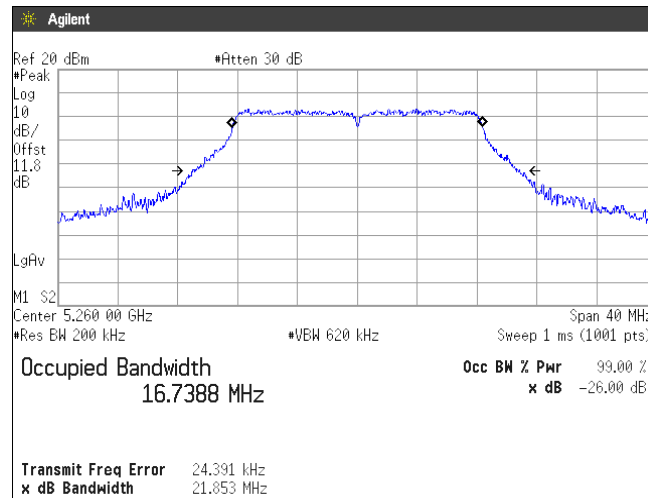


Channel: 56

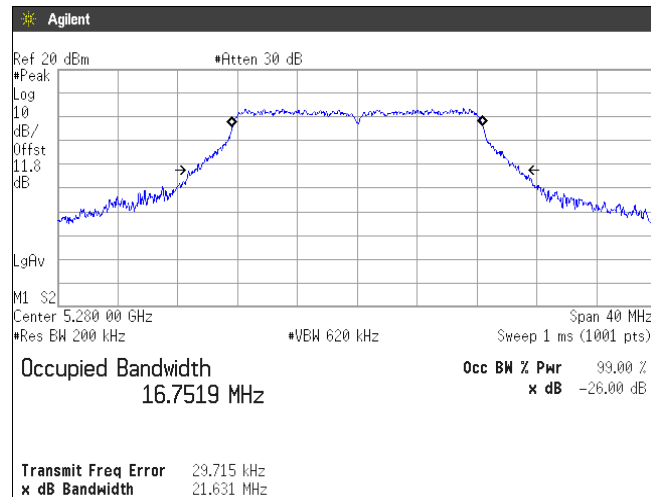


Channel: 64

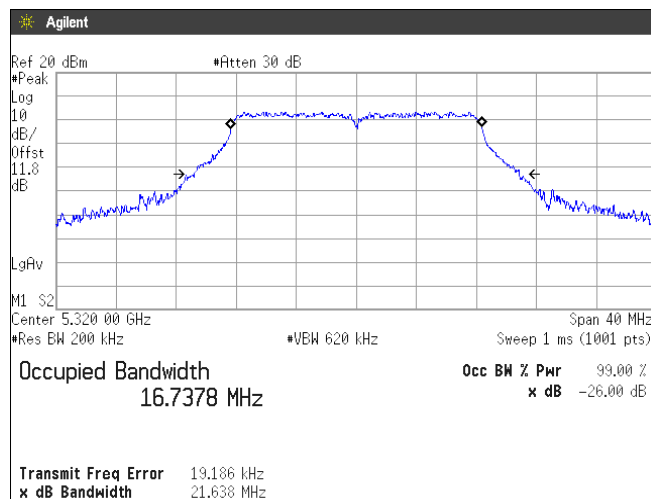


(5.6GHz Band)
Channel: 100

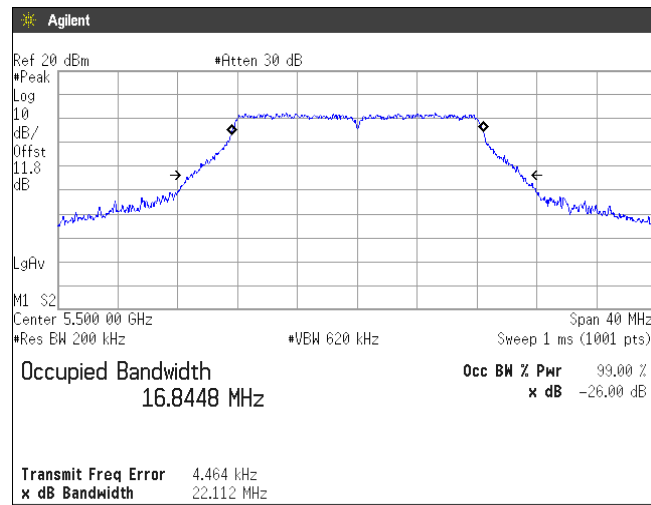


Channel: 116

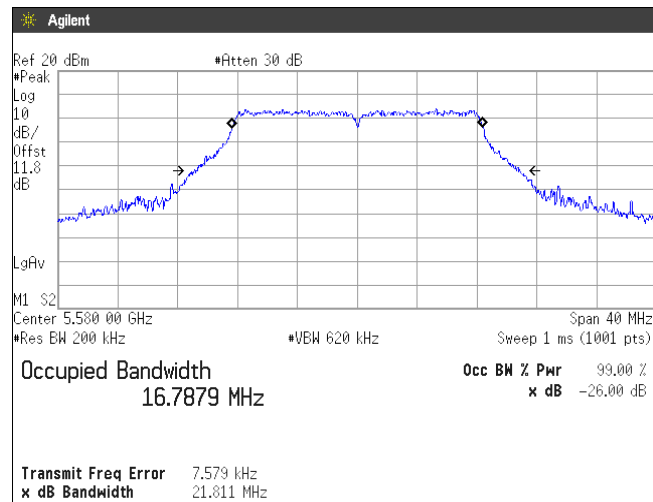


Channel: 140

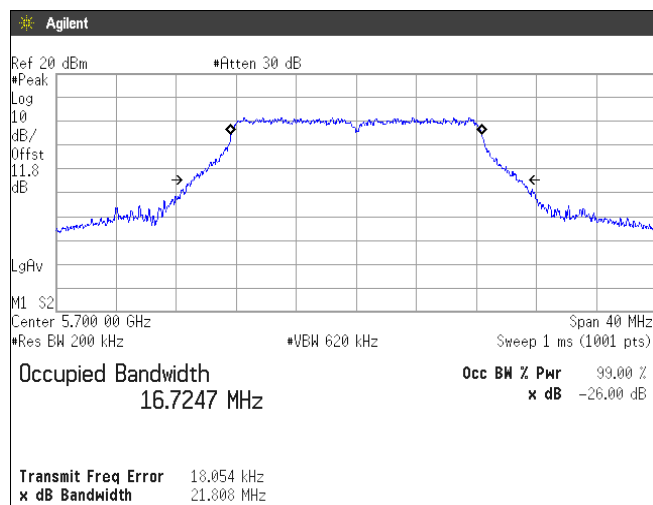


[IEEE802.11n (HT20)]
(5.2GHz Band)
Channel: 36

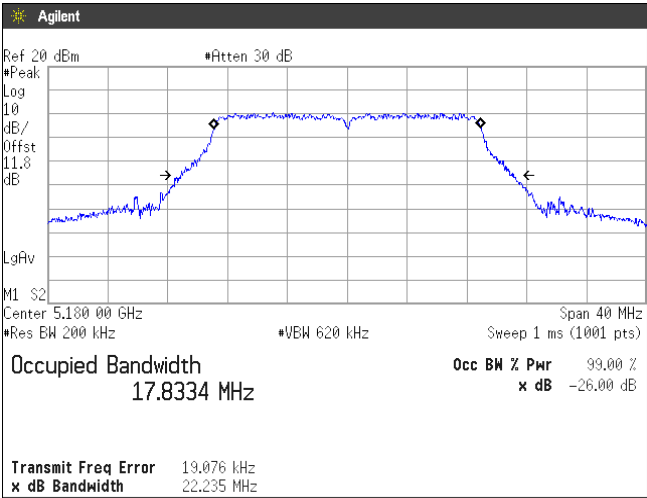


Channel: 40

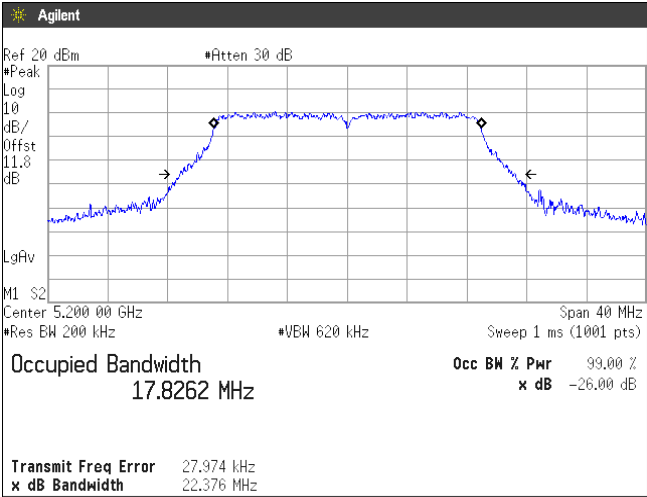


Channel: 48

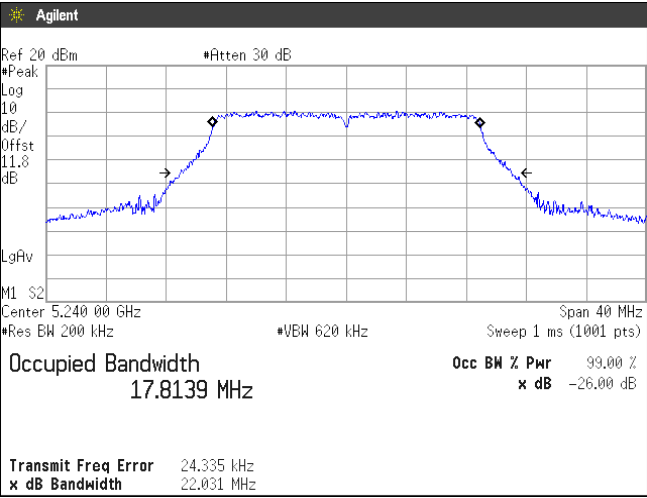


(5.3GHz Band)
Channel: 52

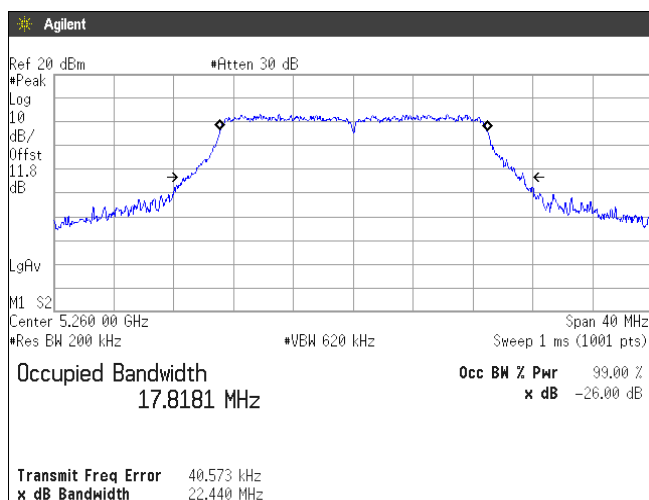


Channel: 56

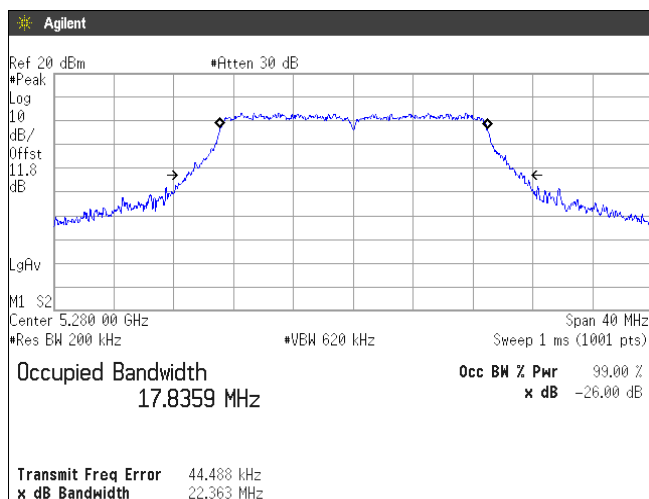


Channel: 64

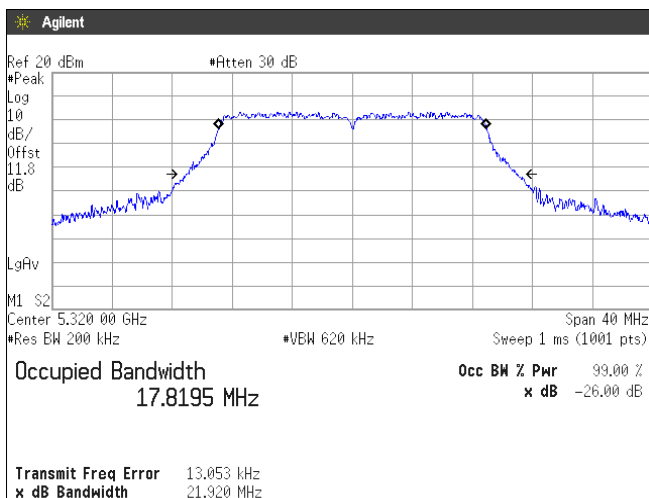


(5.6GHz Band)
Channel: 100

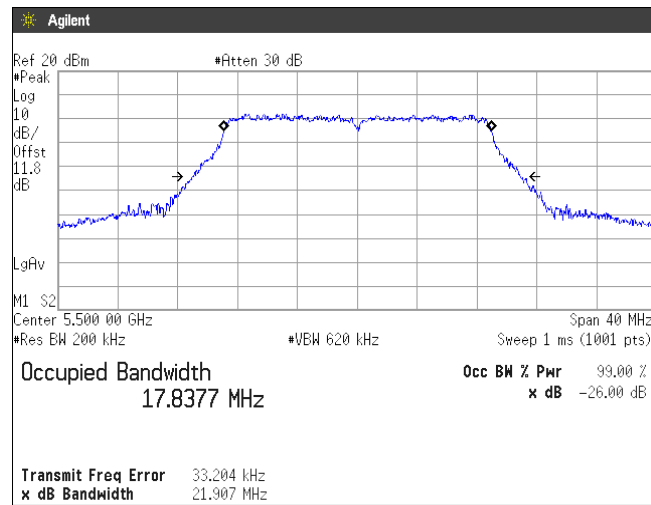


Channel: 116

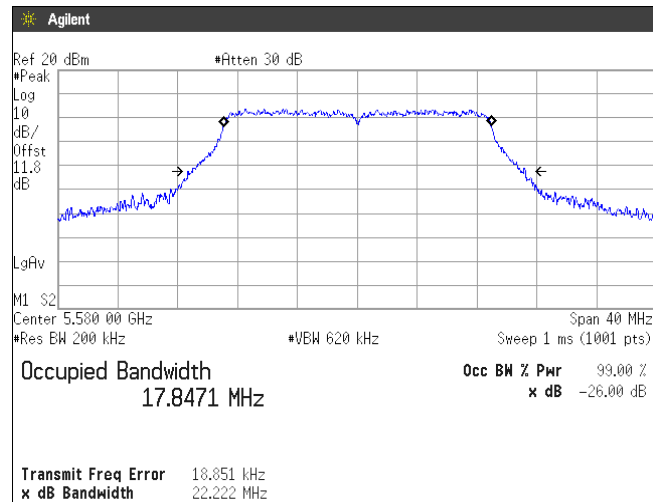


Channel: 140

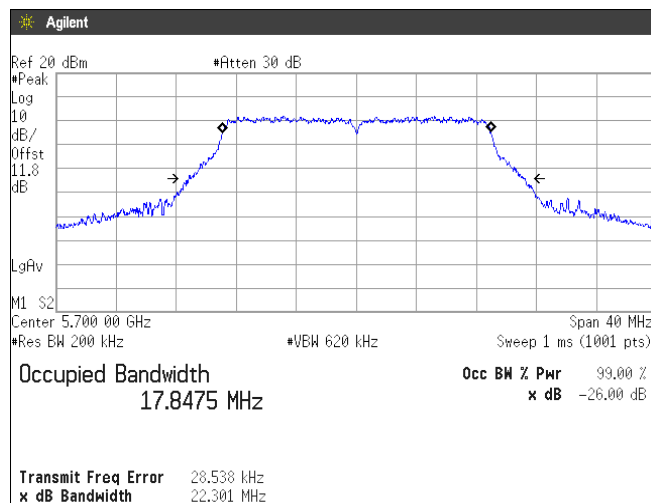


[IEEE802.11n (HT40)]
(5.2GHz Band)
Channel: 38

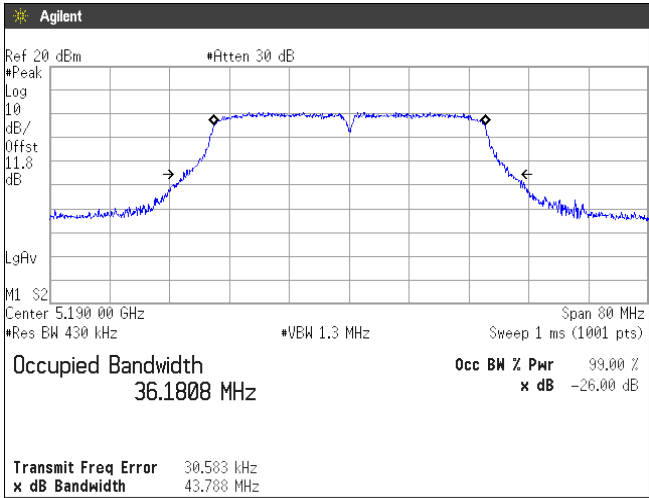


Channel: 46

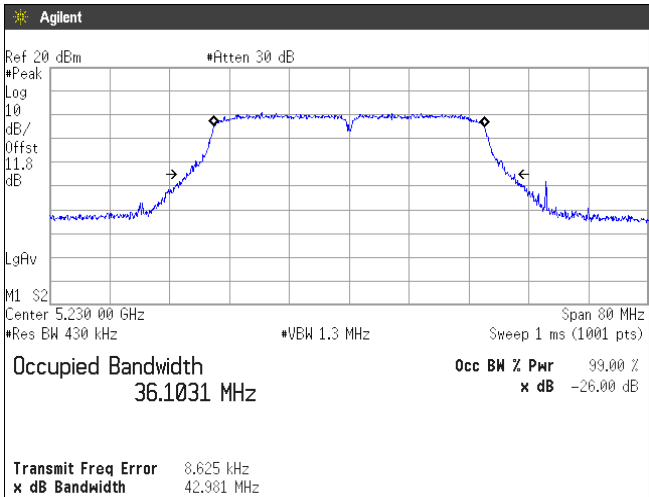


(5.3GHz Band)
Channel: 54

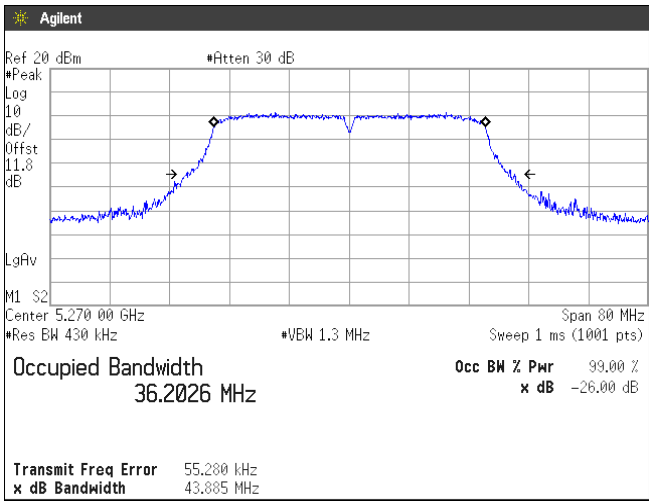


Channel: 62

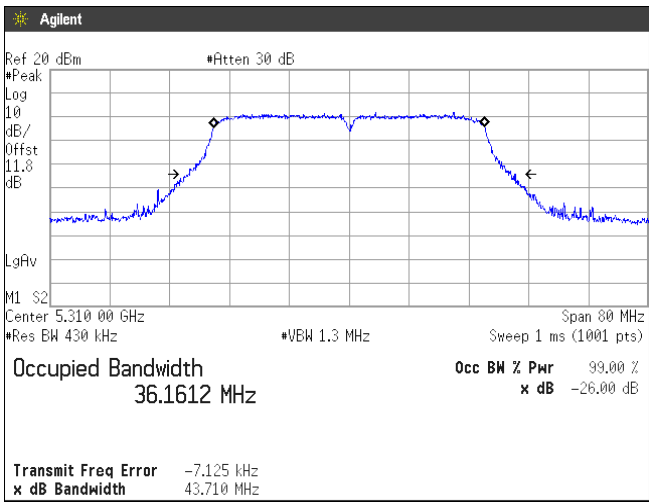


(5.6GHz Band)
Channel: 102

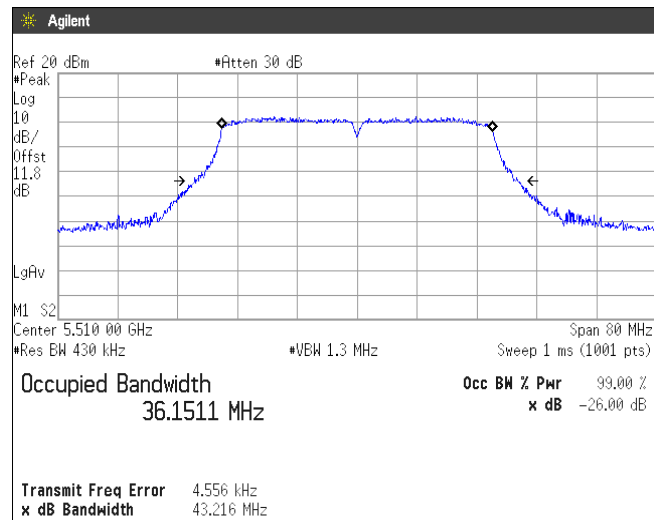


Channel: 110

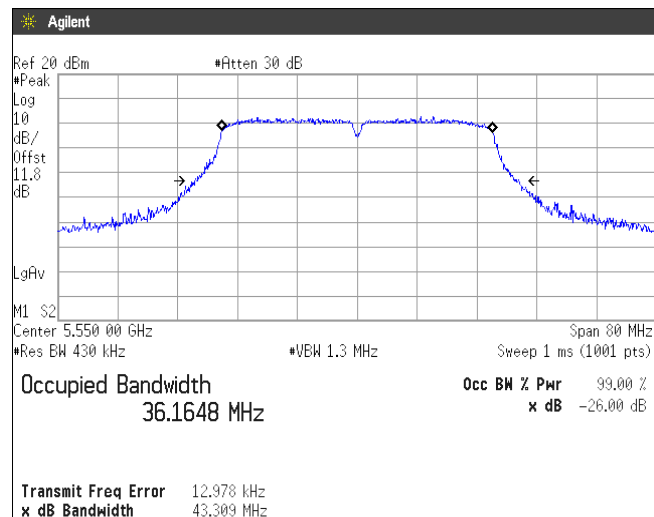


Channel: 134

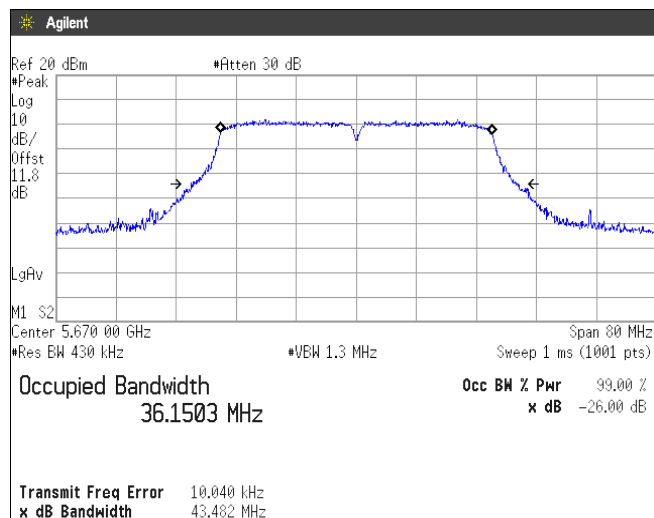


[IEEE802.11ac (HT80)]
(5.2GHz Band)
Channel: 42

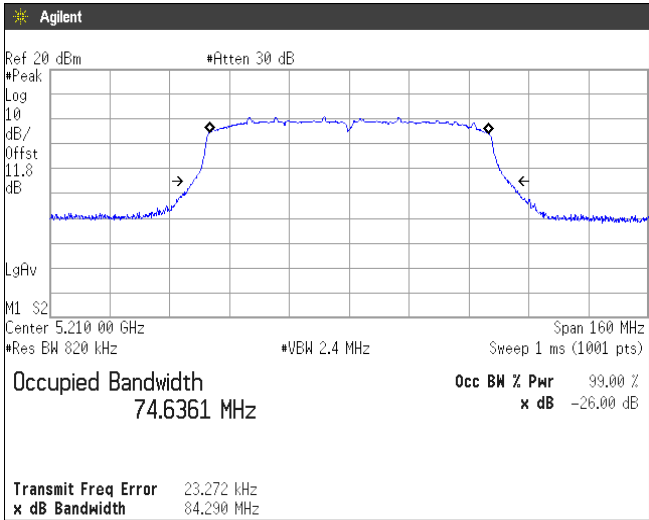


(5.3GHz Band)
Channel: 58

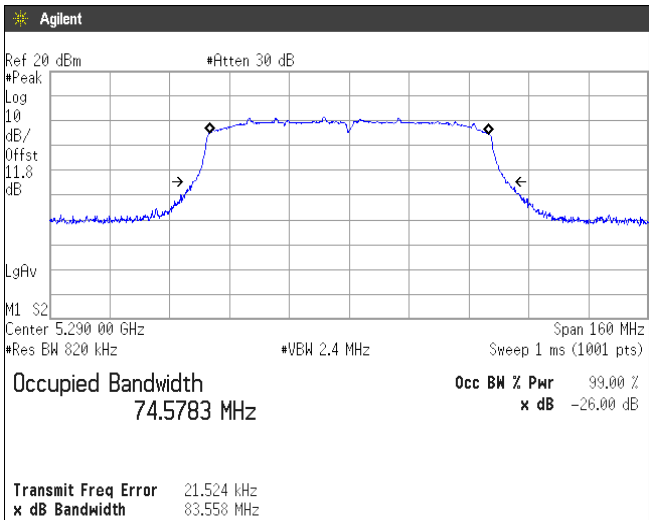

(5.6GHz Band)
Channel: 106

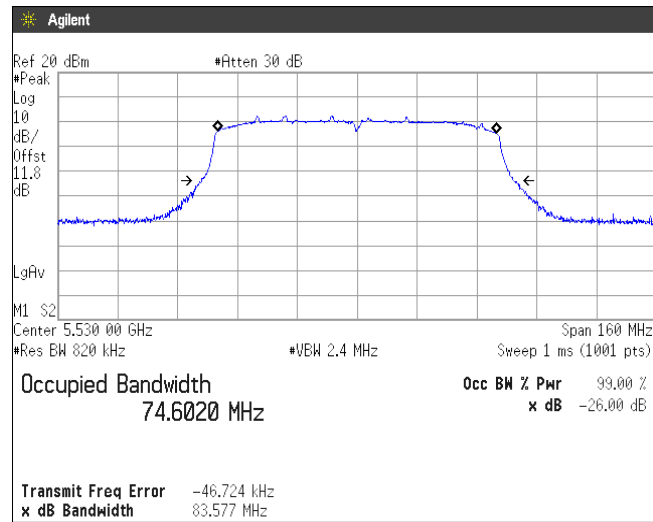

Channel: 122

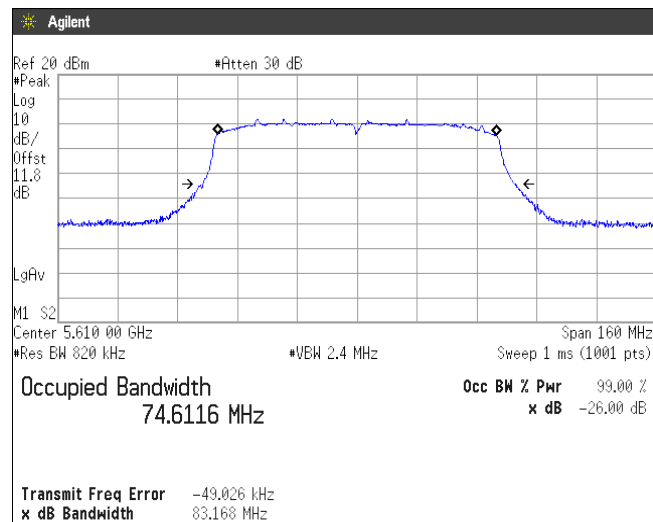

5. Maximum Conducted Output Power

5.1 Measurement procedure

[FCC 15.407(a), KDB 789033 D02, Section E.2.b)Method SA-1, d)Method SA-2]

The peak power is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- RBW=1MHz, VBW=3MHz, Span=35MHz/70MHz/140MHz, Sweep=auto, Detector=RMS, Trace mode=Averaging


The EUT was set to operate with following conditions.

- 5.2GHz Band, 5.3GHz Band, 5.6GHz Band

The test mode of EUT is as follows.

- Tx mode

- Test configuration

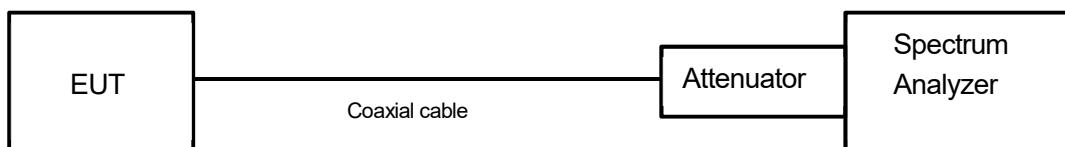

5.2 Limit

- (1) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi.
- (2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10\log B$, where B is the 26dB emission bandwidth in megahertz.
- (3) For the 5.725-5.85GHz bands, the maximum conducted output power over the frequency band of operation shall not exceed 1W.

<Output Power Limit Calculation>

Band	Mode	Power Limit (mW)	Calculated Limit (dBm)	Antenna Gain (dBi)	Determined Limit (dBm)
5.2GHz Band	802.11a	250	23.97	-5.4	23.97
	802.11n HT20				
	802.11n HT40				
	802.11ac HT80				

Band	Mode	Power Limit (mW)	Calculated Limit (dBm)	Antenna Gain (dBi)	Determined Limit (dBm)
		Least 26dBc BW (MHz)			
5.3GHz Band	802.11a	250	23.97	-4.8	23.97
		21.494	24.32		
	802.11n HT20	250	23.97		23.97
		22.217	24.47		
	802.11n HT40	250	23.97		23.97
		42.725	27.31		
	802.11ac HT80	250	23.97		23.97
		83.558	30.22		

Band	Mode	Power Limit (mW)	Calculated Limit (dBm)	Antenna Gain (dBi)	Determined Limit (dBm)
		Least 26dBc BW (MHz)			
5.6GHz Band	802.11a	250	23.97	-6.4	23.97
		21.63	24.35		
	802.11n HT20	250	23.97		23.97
		21.852	24.39		
	802.11n HT40	250	23.97		23.97
		43.014	27.34		
	802.11ac HT80	250	23.97		23.97
		83.168	30.20		

5.3 Measurement result

Date : March 22, 2017
 Temperature : 23.8 [°C]
 Humidity : 48.2 [%]
 Test place : Shielded room No.4

Test engineer : Tadahiro Seino

Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)	Test Result (mW)
				On Time(ms)	On+Off Time(ms)	X			
802.11a	36	5180	13.15	1.364	1.372	0.994	0.025	13.175	20.775
	40	5200	13.15					13.175	20.775
	48	5240	12.90					12.925	19.613
	52	5260	13.37	1.364	1.372	0.994	0.025	13.395	21.854
	56	5280	13.39					13.415	21.955
	64	5320	13.49					13.515	22.467
	100	5500	12.04	1.364	1.372	0.994	0.025	12.065	16.089
	116	5580	13.62					13.645	23.149
	140	5700	11.89					11.915	15.543

Note: X = On time / (On + Off time), DCF=10log (1/x)

Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)	Test Result (mW)
				On Time(ms)	On+Off Time(ms)	X			
802.11n (20MHz)	36	5180	13.19	1.274	1.284	0.992	0.034	13.224	21.009
	40	5200	13.06					13.094	20.389
	48	5240	12.95					12.984	19.879
	52	5260	13.45	1.276	1.284	0.994	0.027	13.477	22.270
	56	5280	13.44					13.467	22.218
	64	5320	13.47					13.497	22.372
	100	5500	12.05	1.274	1.284	0.992	0.034	12.084	16.158
	116	5580	13.65					13.684	23.356
	140	5700	11.75					11.784	15.080

Note: X = On time / (On + Off time), DCF=10log (1/x)


Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)	Test Result (mW)
				On Time(ms)	On+Off Time(ms)	X			
802.11n (40MHz)	38	5190	13.18	0.635	0.646	0.983	0.075	13.255	21.157
	46	5230	12.97					13.045	20.159
	54	5270	12.14	0.634	0.645	0.983	0.075	12.215	16.652
	62	5310	11.40					11.475	14.043
	102	5510	12.10	0.634	0.646	0.981	0.081	12.181	16.525
	110	5550	12.11					12.191	16.563
	134	5670	11.74					11.821	15.210

Note: X = On time / (On + Off time), DCF=10log (1/x)


Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)	Test Result (mW)
				On Time(ms)	On+Off Time(ms)	X			
802.11ac (80MHz)	42	5210	12.30	0.248	0.258	0.959	0.180	12.480	17.703
	58	5290	11.73	0.248	0.258	0.961	0.172	11.902	15.494
	106	5530	11.38	0.247	0.258	0.957	0.189	11.569	14.352
	122	5610	11.49	0.248	0.258	0.961	0.172	11.662	14.662

Note: X = On time / (On + Off time), DCF=10log (1/x)


5.4 Trace data
[IEEE802.11a]
(5.2GHz Band)
Channel: 36

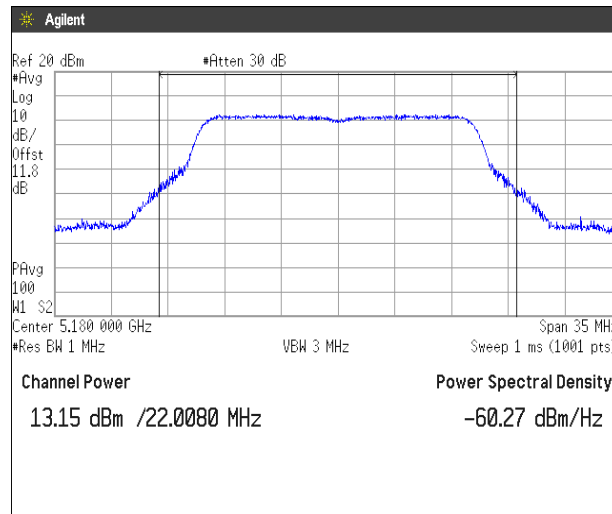


Channel: 40

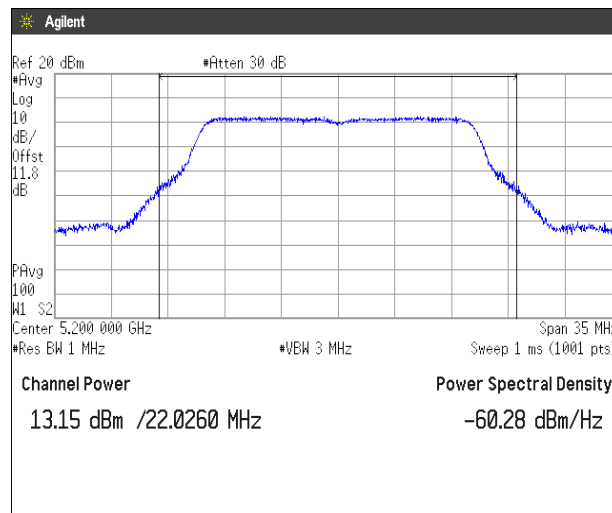


Channel: 48

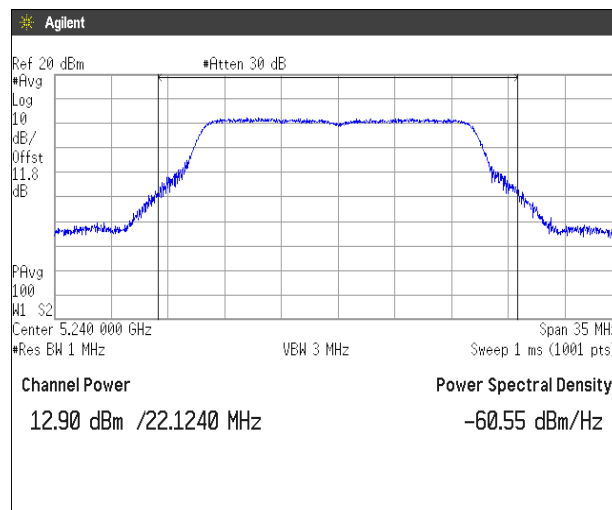


(5.3GHz Band)
Channel: 52

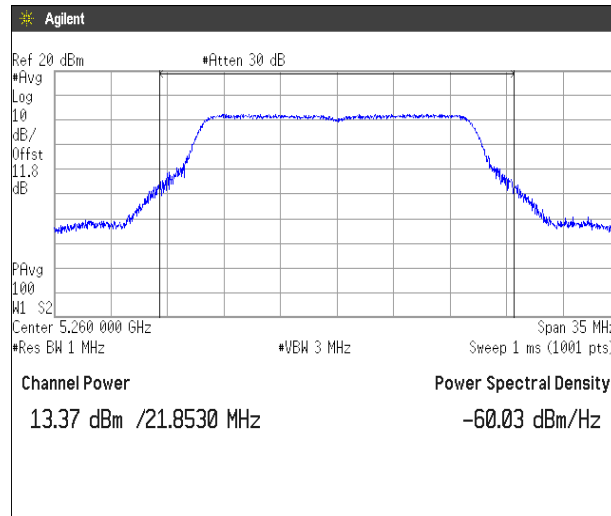


Channel: 56

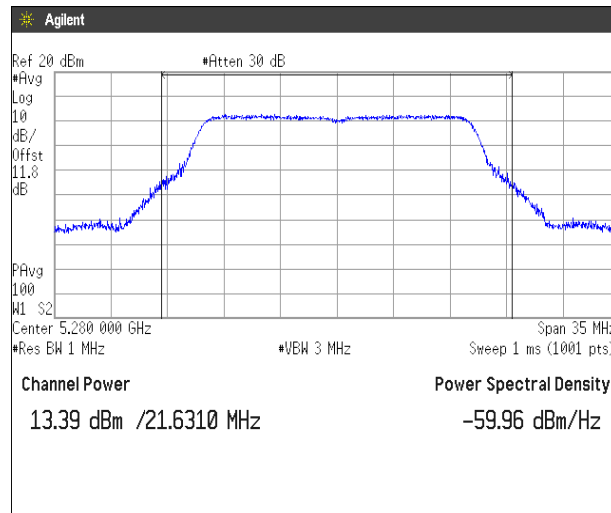


Channel: 64

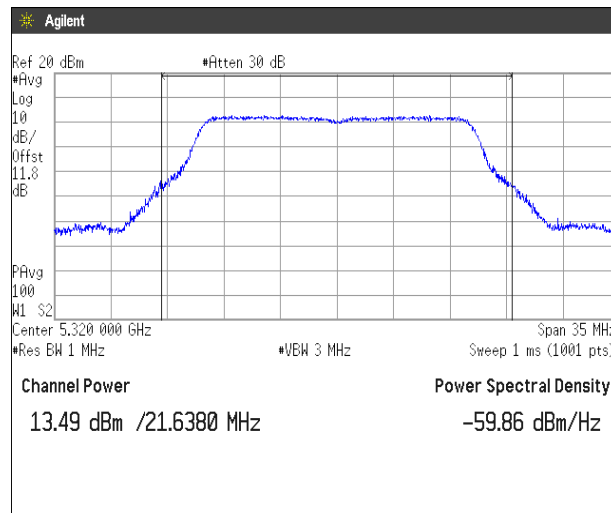


(5.6GHz Band)
Channel: 100

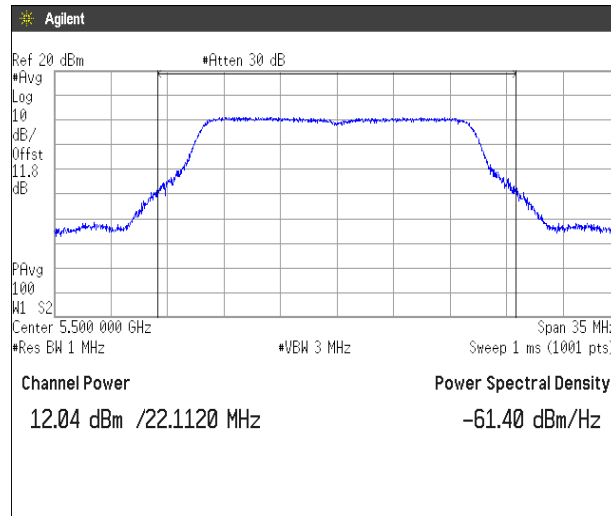


Channel: 116

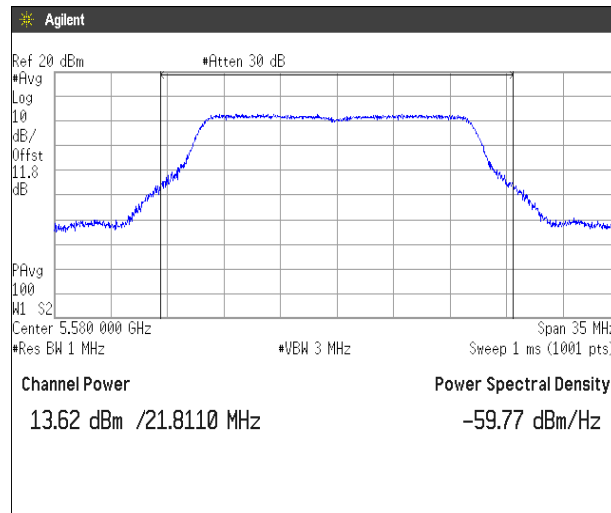


Channel: 140

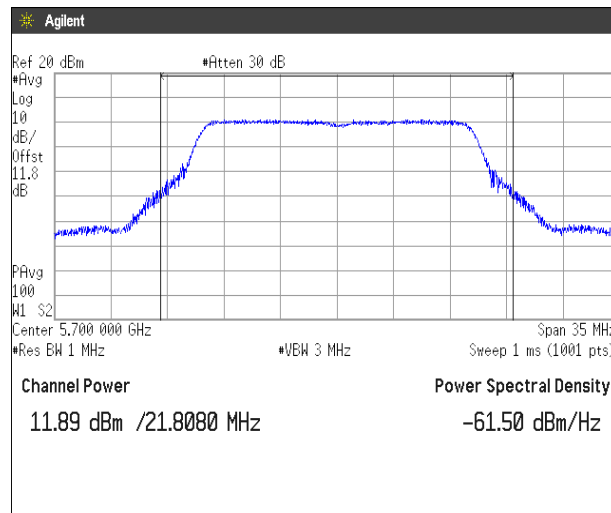


**[IEEE802.11n (HT20)]
(5.2GHz Band)
Channel: 36**

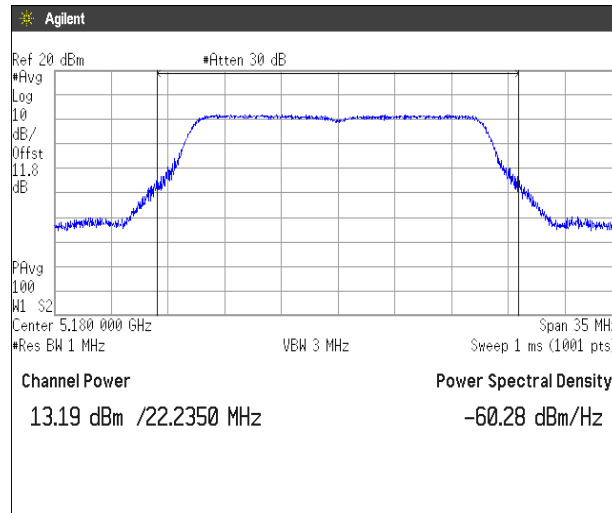


Channel: 40

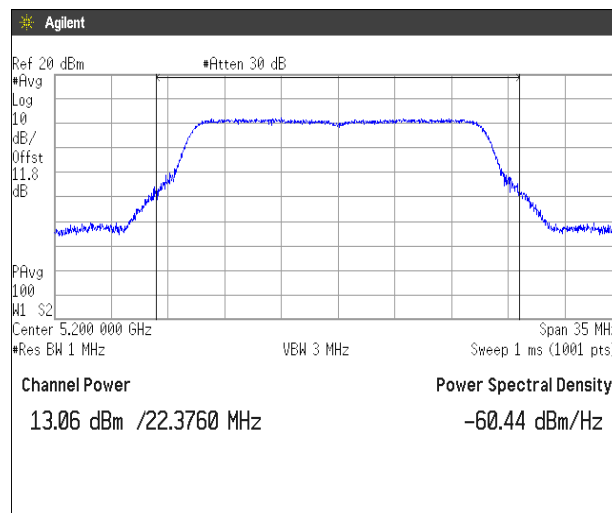


Channel: 48

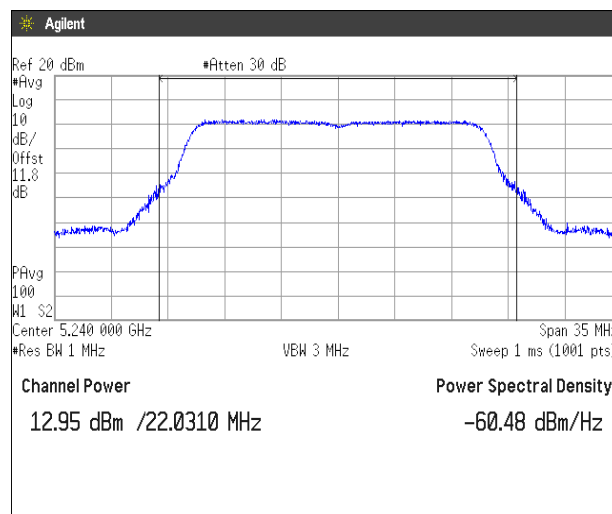


(5.3GHz Band)
Channel: 52

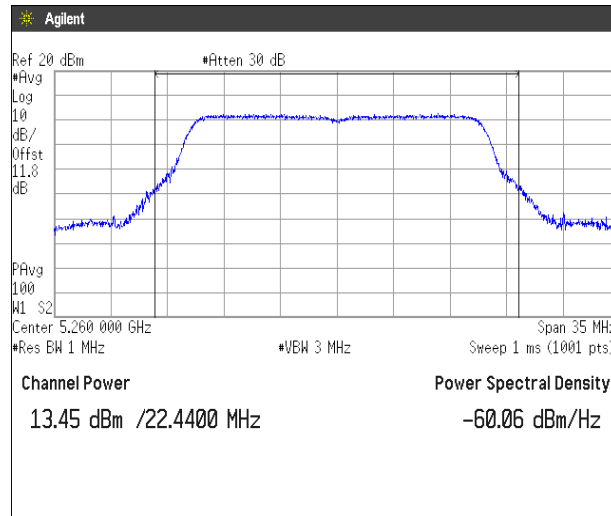


Channel: 56

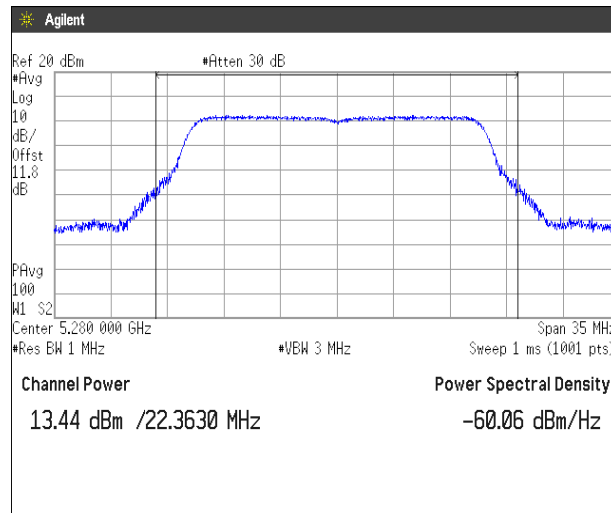


Channel: 64

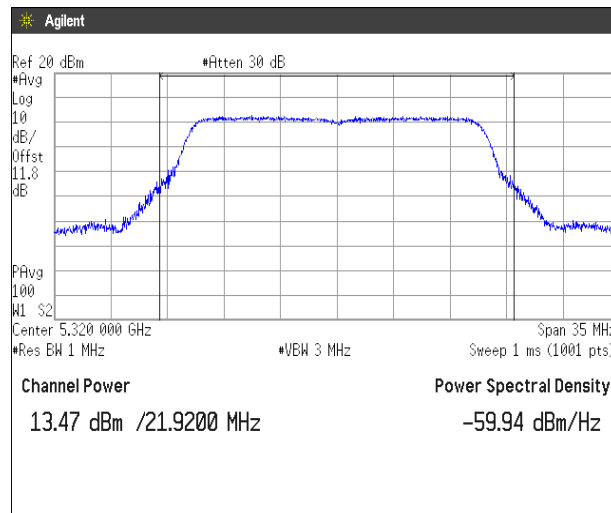


(5.6GHz Band)
Channel: 100

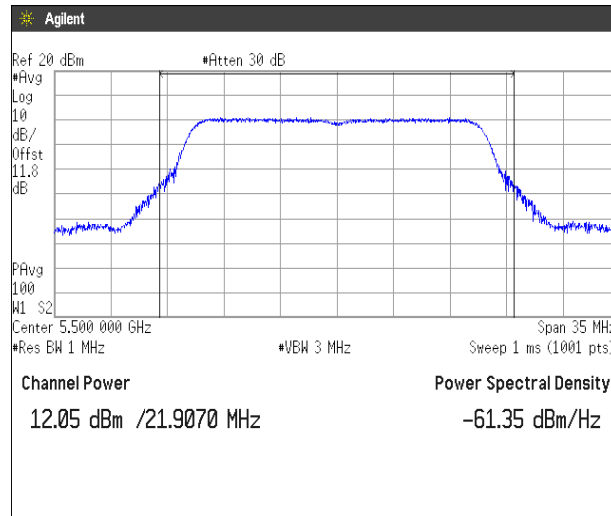


Channel: 116

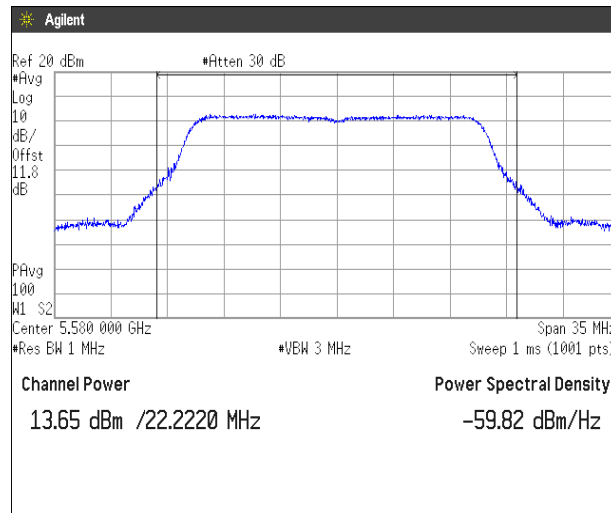


Channel: 140

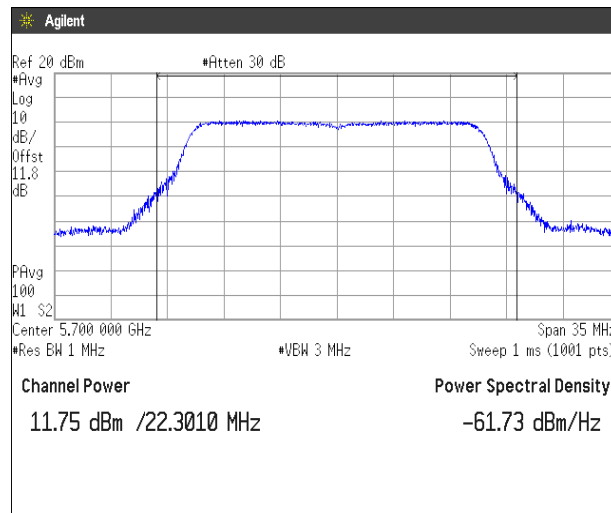


**[IEEE802.11n (HT40)]
(5.2GHz Band)
Channel: 38**

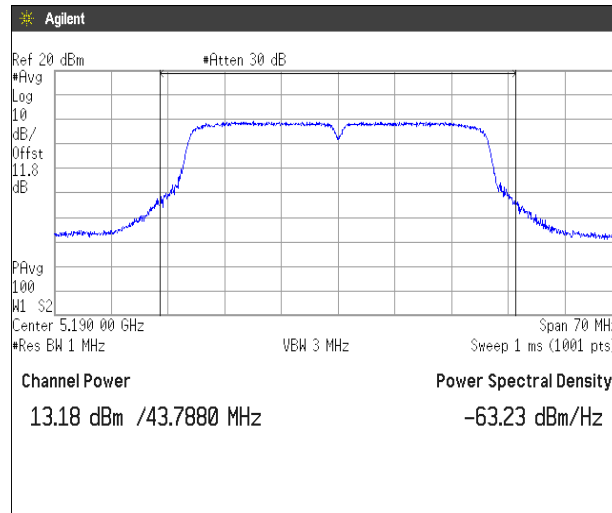


Channel: 46

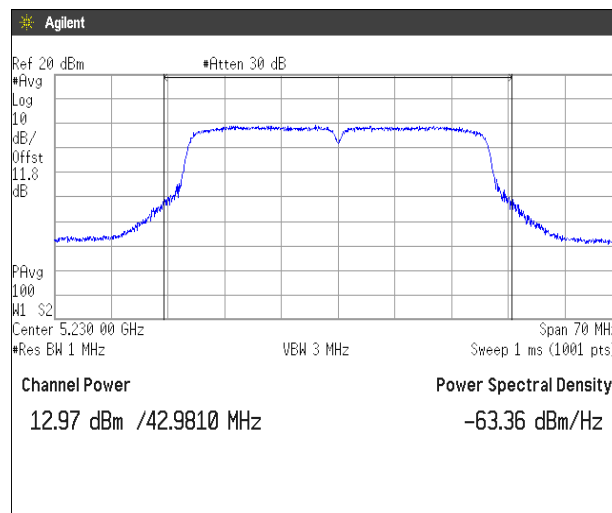


(5.3GHz Band)
Channel: 54

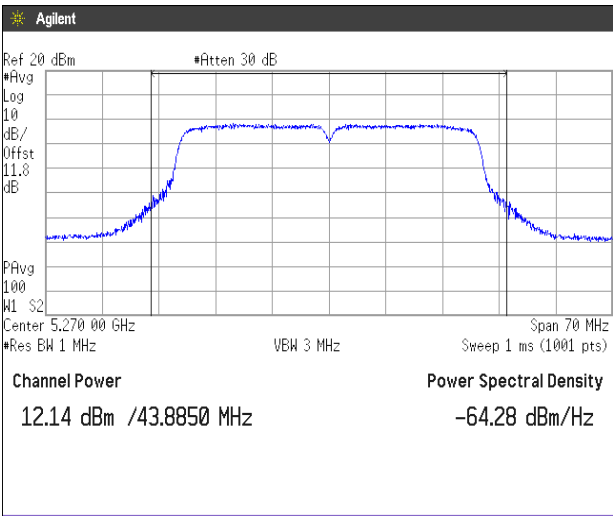


Channel: 62

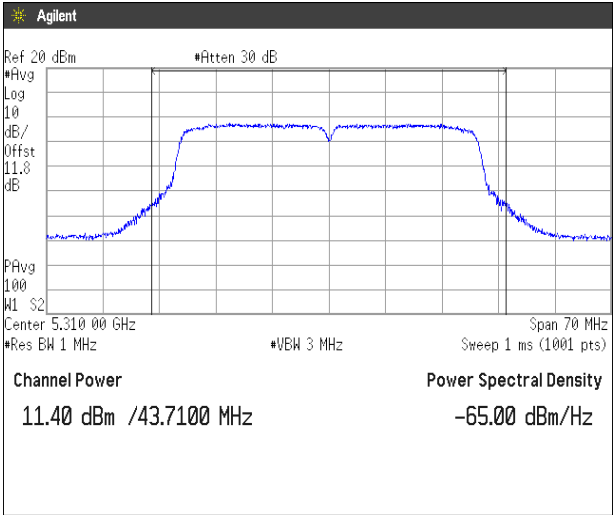


(5.6GHz Band)
Channel: 102

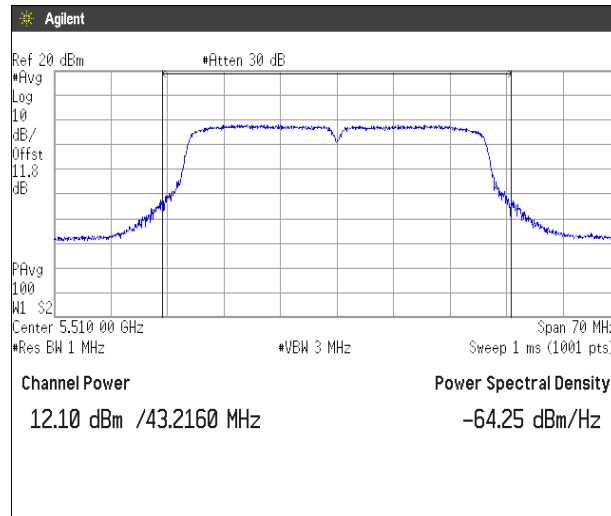


Channel: 110

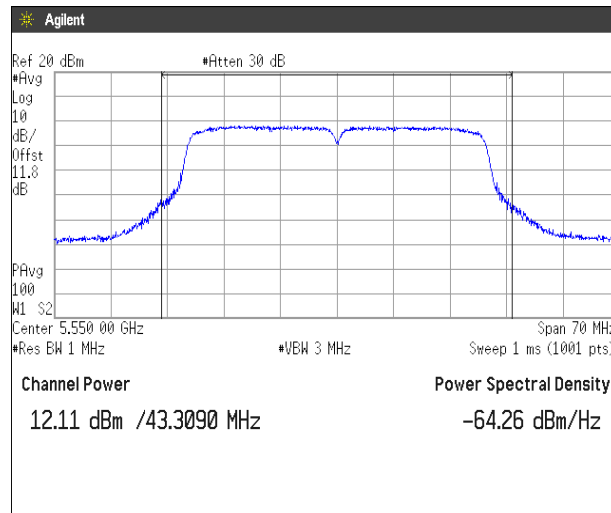


Channel: 134

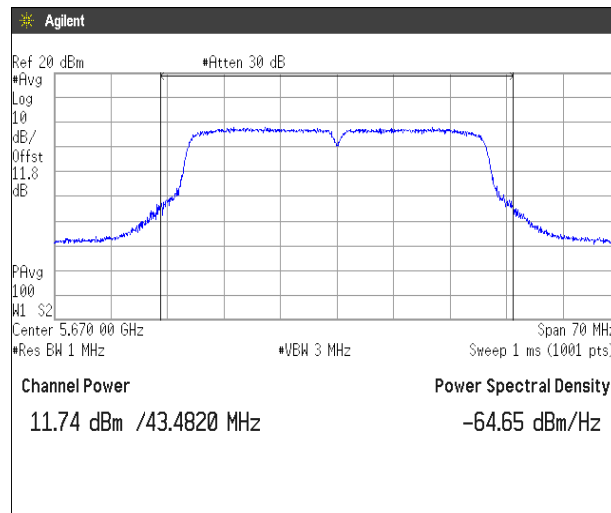


[IEEE802.11ac (HT80)]
(5.2GHz Band)
Channel: 42

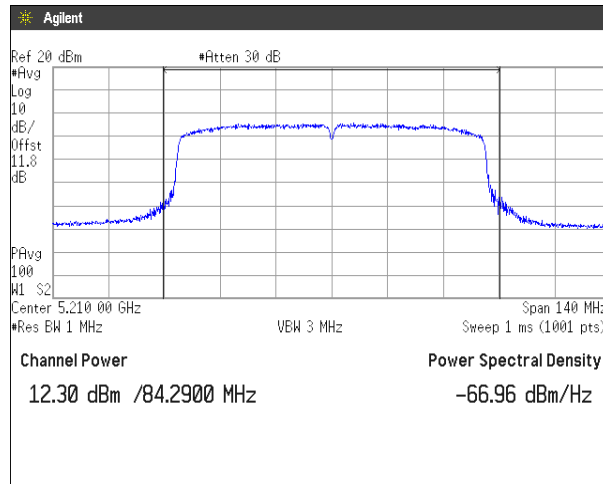


(5.3GHz Band)
Channel: 58

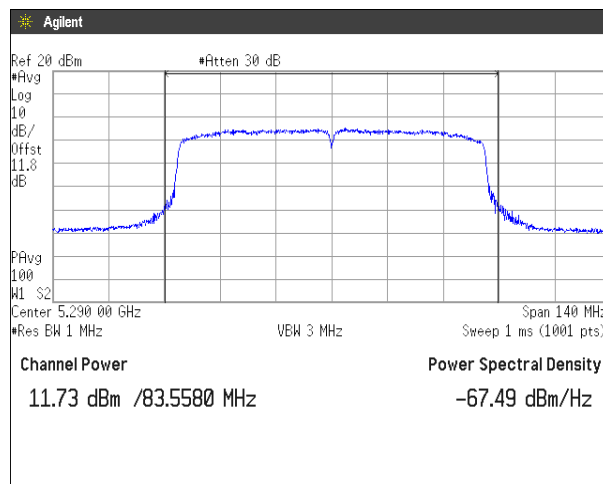

(5.6GHz Band)
Channel: 106

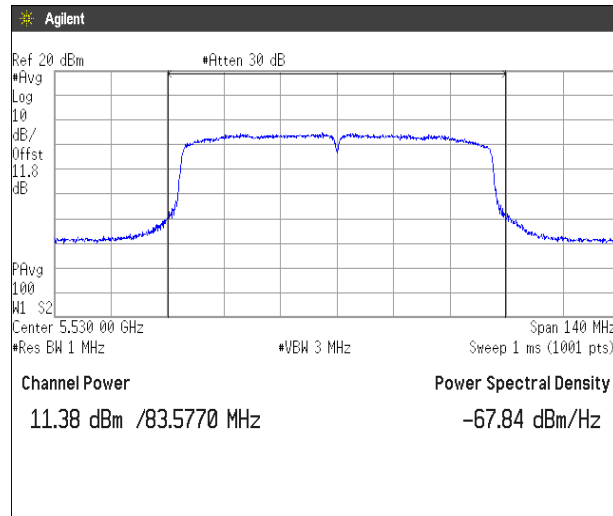

Channel: 122

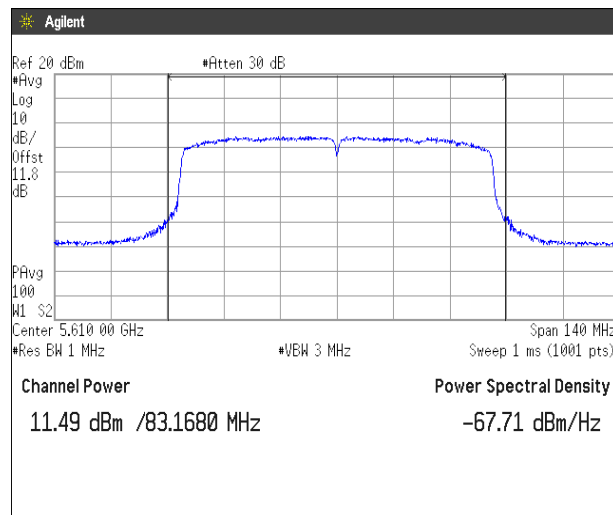

6. Peak Power Spectral Density

6.1 Measurement procedure

[FCC 15.407(a), KDB 789033 D02, Section F]

The peak power spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- RBW=1MHz, VBW=3MHz, Span=25MHz/50MHz/100MHz, Sweep=Auto, Detector=RMS, Trace mode=Averaging


The EUT was set to operate with following conditions.

- 5.2GHz Band, 5.3GHz Band, 5.6GHz Band

The test mode of EUT is as follows.

- Tx mode

- Test configuration

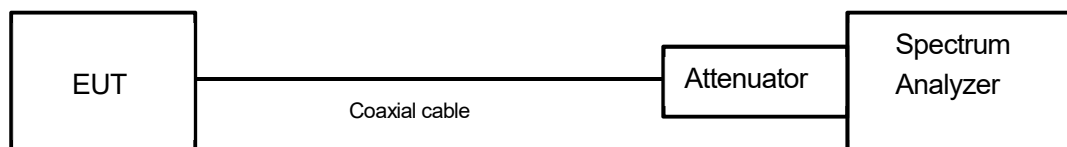

6.2 Limit

- (1) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6dBi.
- (2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6dBi.
- (3) For the 5.725-5.85GHz bands, the maximum power spectral density shall not exceed 30dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

<Peak Power Spectral Density Limit Calculation>

Band	Antenna Gain (dBi)	Limit
5.2GHz Band	-5.4	11dBm/MHz
5.3GHz Band	-4.8	11dBm/MHz
5.6GHz Band	-6.4	11dBm/MHz

6.3 Measurement result

Date : March 23, 2017
 Temperature : 23.6 [°C]
 Humidity : 49.0 [%]
 Test place : Shielded room No.4

Test engineer : Tadahiro Seino

Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)
				On Time(ms)	On+Off Time(ms)	X		
802.11a	36	5180	-0.072	1.364	1.372	0.994	0.025	-0.047
	40	5200	0.127					0.152
	48	5240	0.099					0.124
	52	5260	2.533	1.364	1.372	0.994	0.025	2.558
	56	5280	2.614					2.639
	64	5320	2.642					2.667
	100	5500	1.232	1.364	1.372	0.994	0.025	1.257
	116	5580	2.815					2.840
	140	5700	1.221					1.246

Note: X = On time / (On + Off time), DCF=10log (1/x)

Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)
				On Time(ms)	On+Off Time(ms)	X		
802.11n (20MHz)	36	5180	-0.506	1.274	1.284	0.992	0.034	-0.472
	40	5200	-0.508					-0.474
	48	5240	-0.320					-0.286
	52	5260	2.314	1.276	1.284	0.994	0.027	2.341
	56	5280	2.291					2.318
	64	5320	2.428					2.455
	100	5500	1.195	1.274	1.284	0.992	0.034	1.229
	116	5580	2.675					2.709
	140	5700	0.741					0.775

Note: X = On time / (On + Off time), DCF=10log (1/x)


Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)
				On Time(ms)	On+Off Time(ms)	X		
802.11n (40MHz)	38	5190	-3.389	0.635	0.646	0.983	0.075	-3.314
	46	5230	-3.314					-3.239
	54	5270	-2.998	0.634	0.645	0.983	0.075	-2.923
	62	5310	-2.578					-2.503
	102	5510	-1.936	0.634	0.646	0.981	0.081	-1.855
	110	5550	-1.830					-1.749
	134	5670	-2.335					-2.254

Note: X = On time / (On + Off time), DCF=10log (1/x)


Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)
				On Time(ms)	On+Off Time(ms)	X		
802.11ac (80MHz)	42	5210	-6.718	0.248	0.258	0.961	0.172	-6.546
	58	5290	-6.149	0.248	0.258	0.963	0.163	-5.986
	106	5530	-5.575	0.247	0.258	0.957	0.189	-5.386
	122	5610	-5.498	0.248	0.258	0.961	0.172	-5.326

Note: X = On time / (On + Off time), DCF=10log (1/x)


6.4 Trace data
[IEEE802.11a]
(5.2GHz Band)
Channel: 36

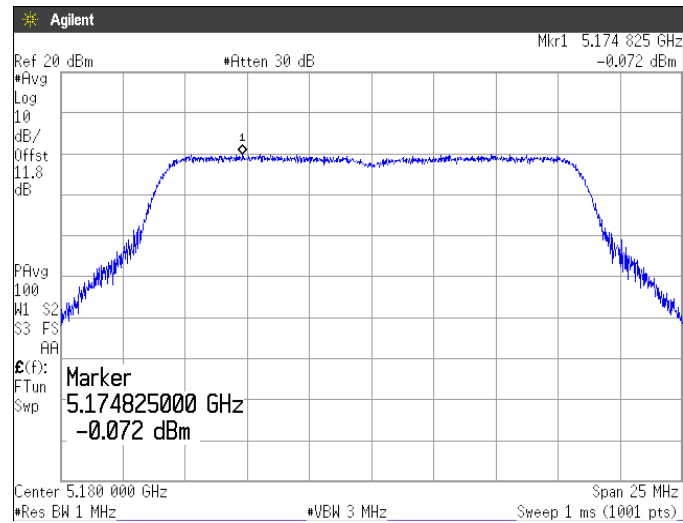


Channel: 40

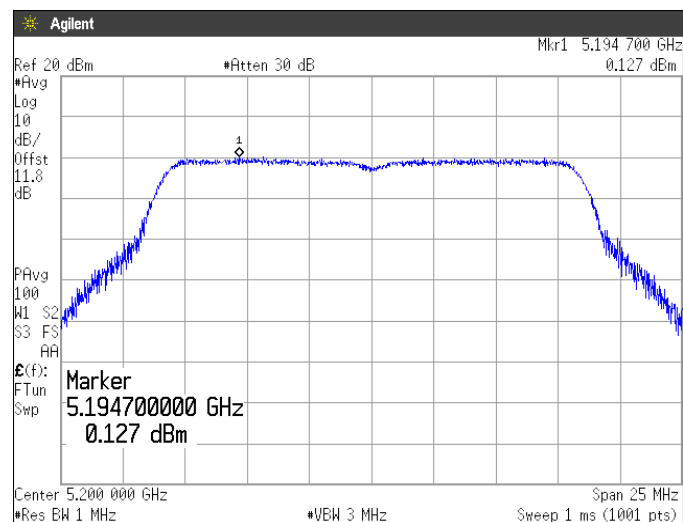


Channel: 48

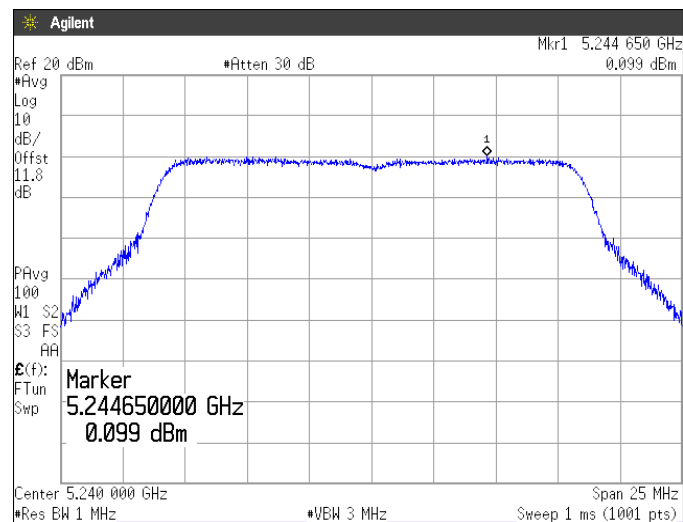


(5.3GHz Band)
Channel: 52

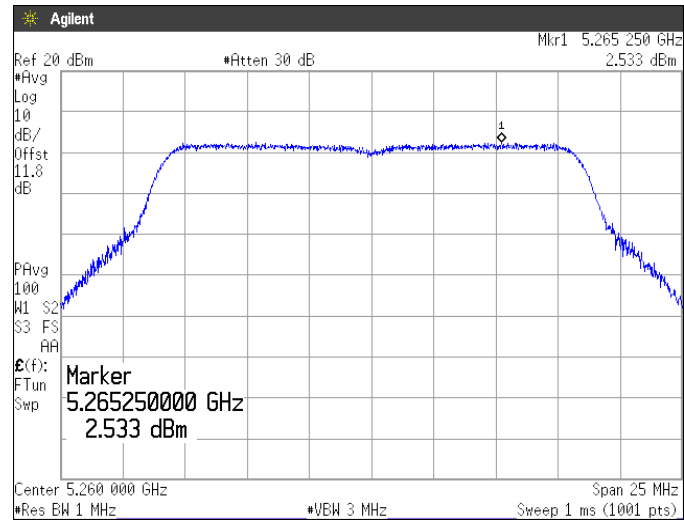


Channel: 56

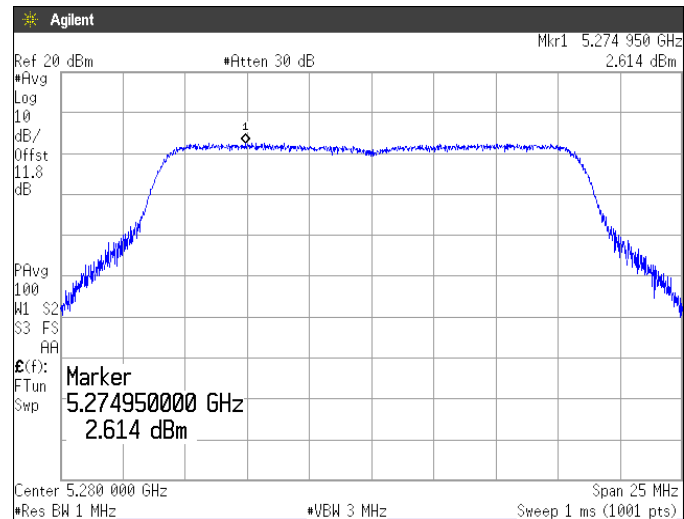


Channel: 64

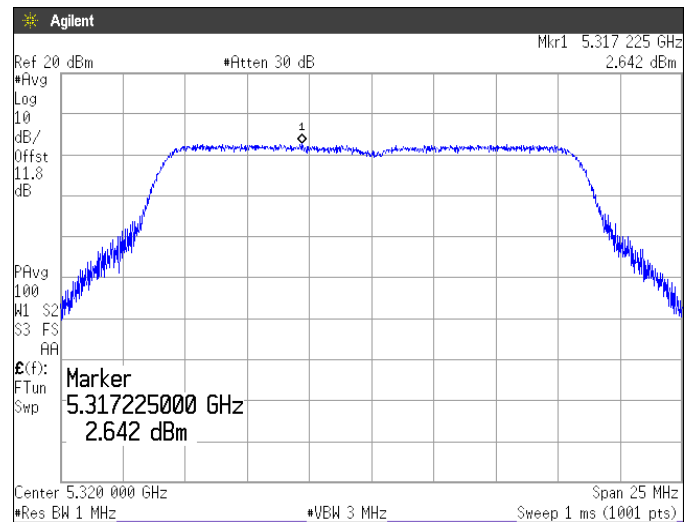


(5.6GHz Band)
Channel: 100

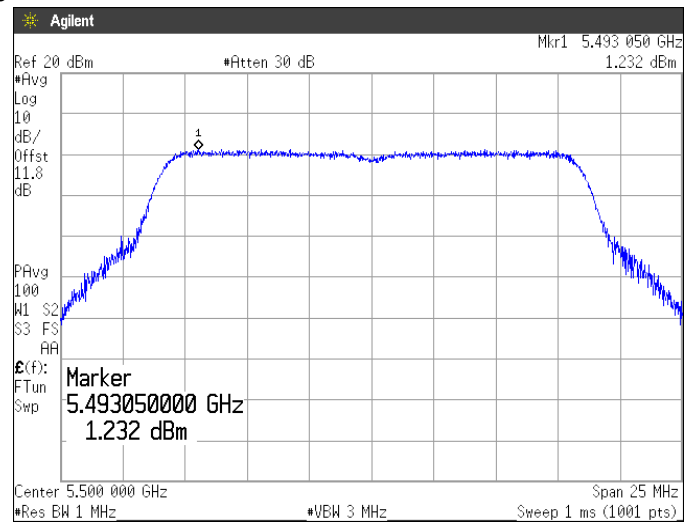


Channel: 116

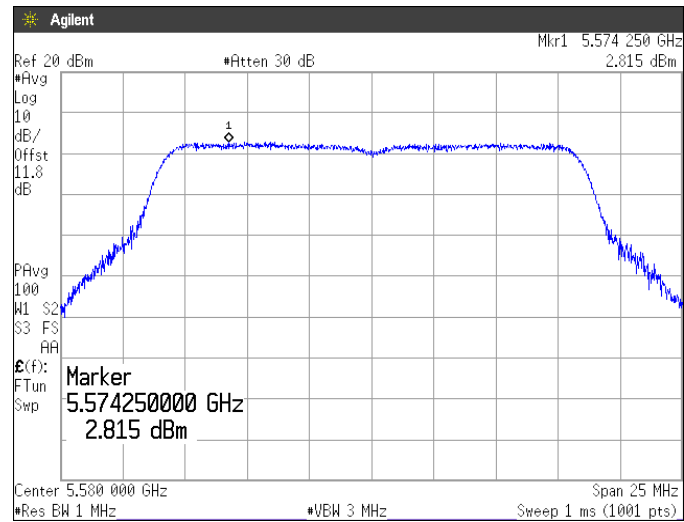


Channel: 140

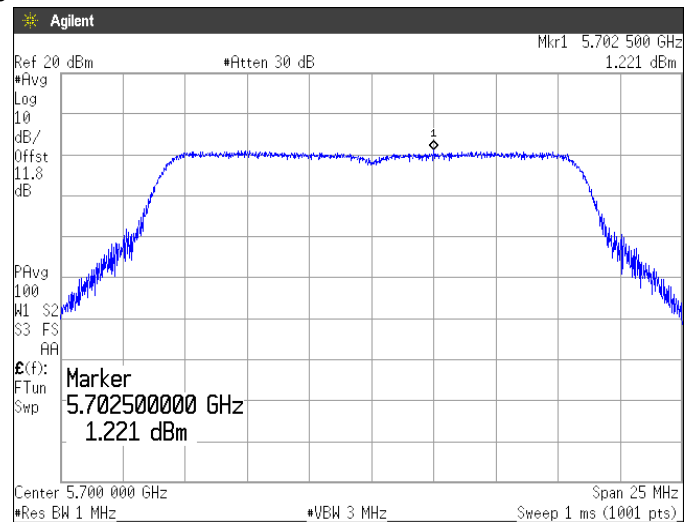


**[IEEE802.11n (HT20)]
(5.2GHz Band)
Channel: 36**

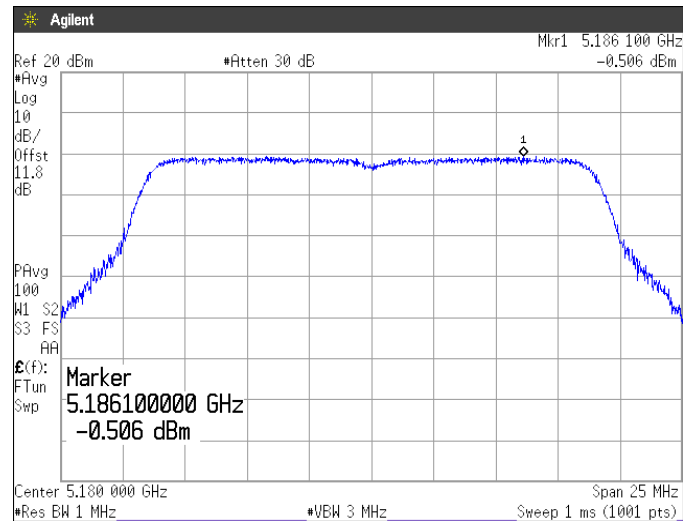


Channel: 40

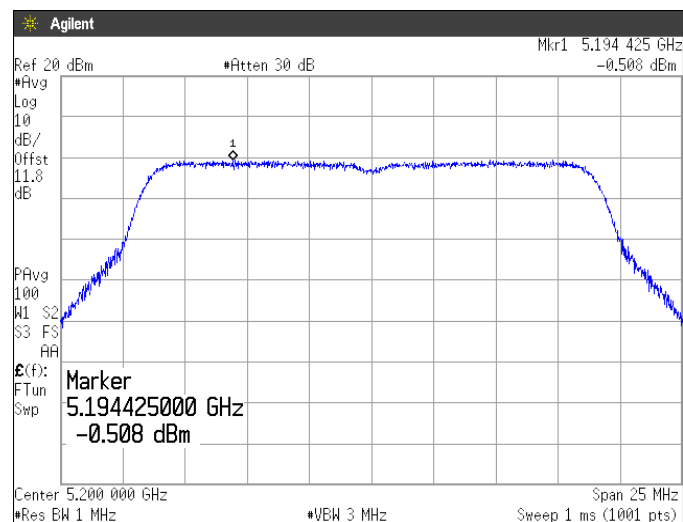


Channel: 48

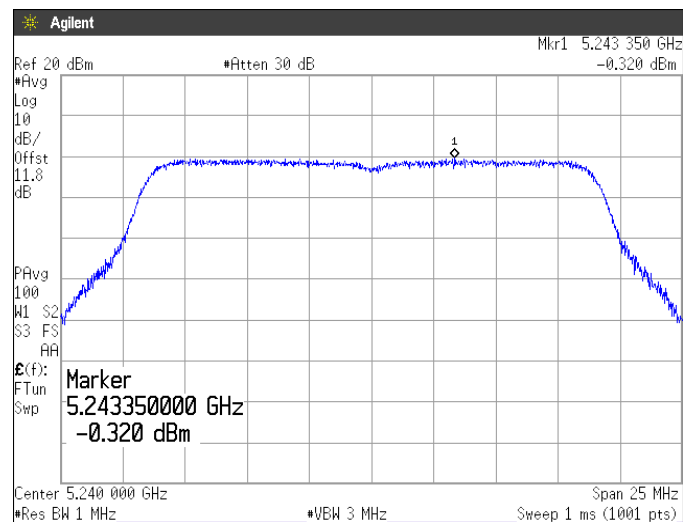


(5.3GHz Band)
Channel: 52

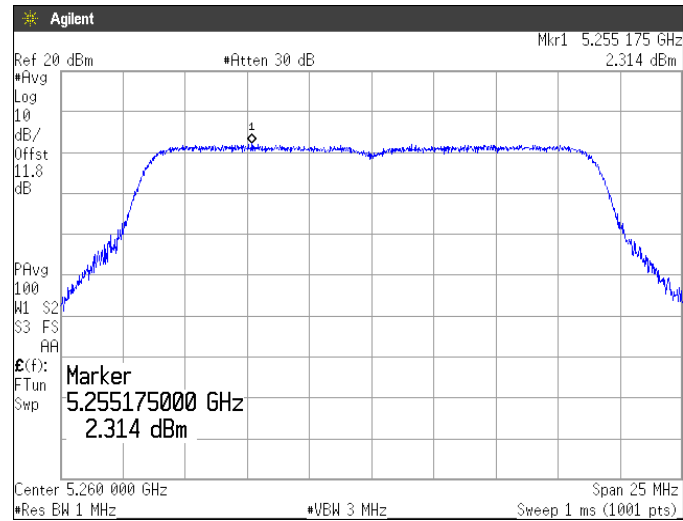

Channel: 56

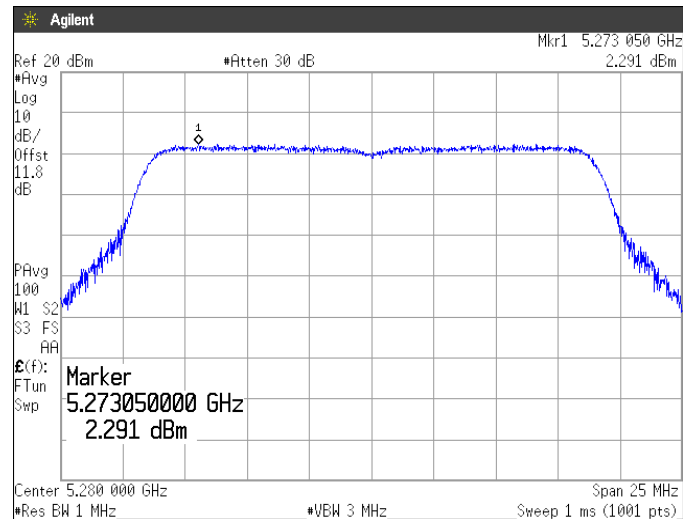


Channel: 64

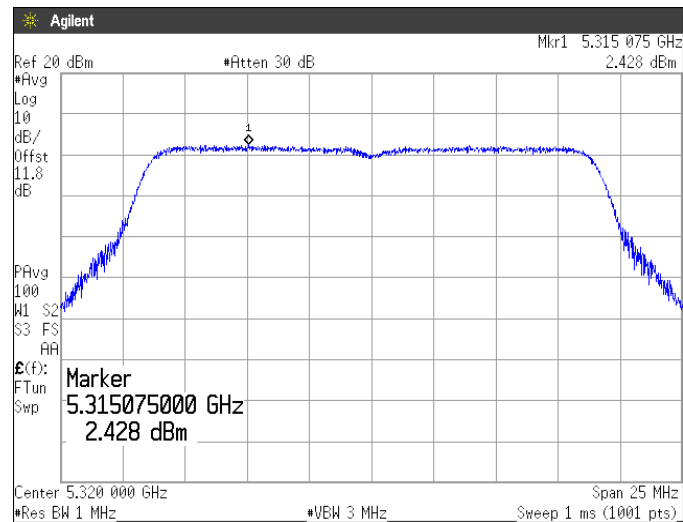


(5.6GHz Band)


Channel: 100

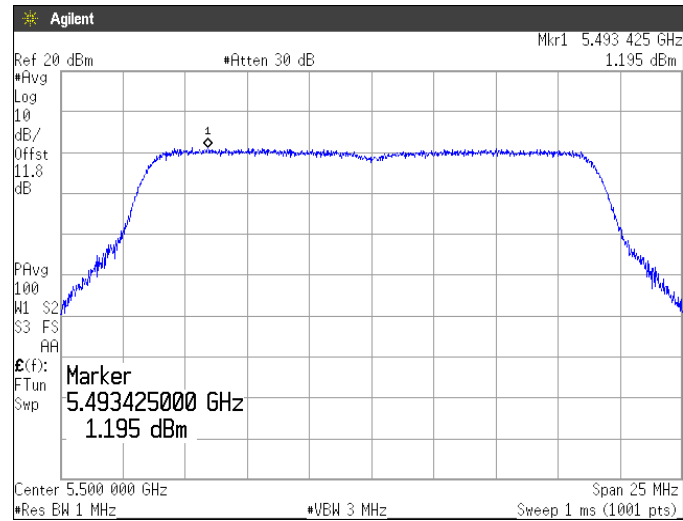


Channel: 116

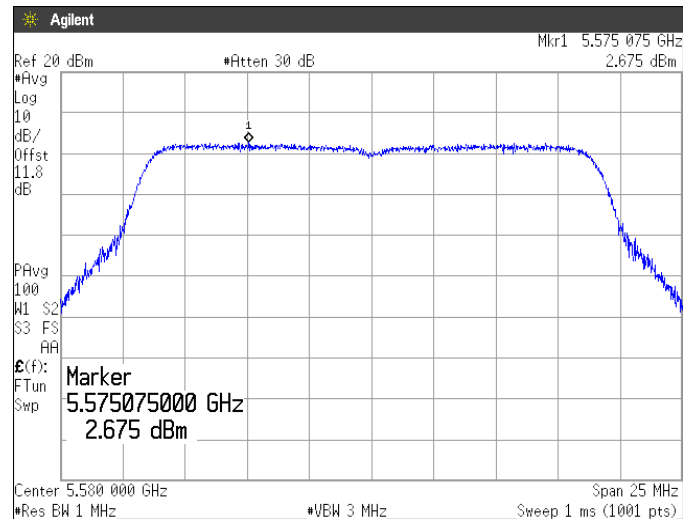


Channel: 140

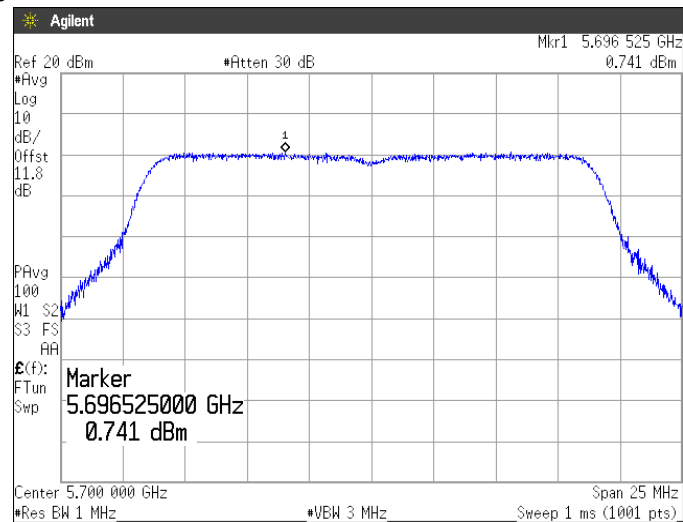


[IEEE802.11n (HT40)]
(5.2GHz Band)
Channel: 38

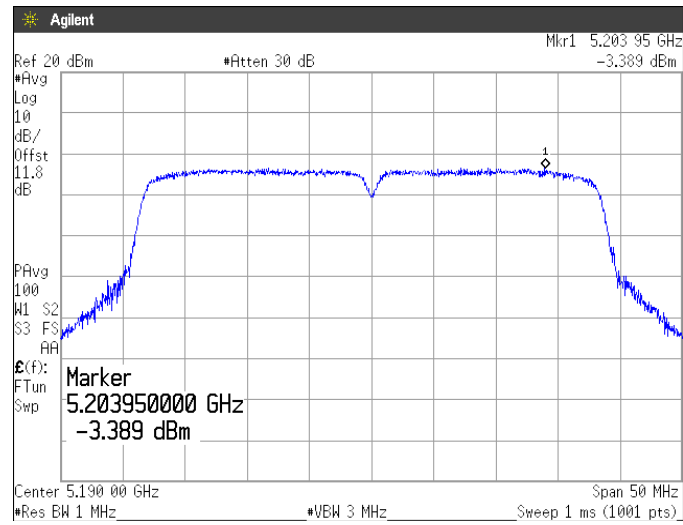


Channel: 46

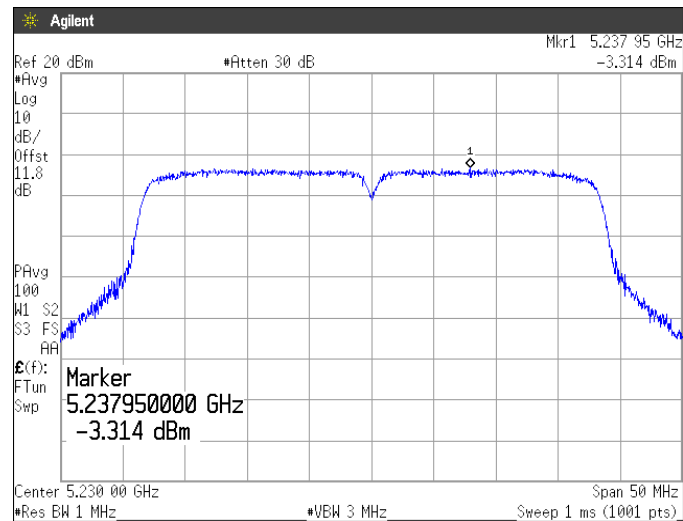


(5.3GHz Band)
Channel: 54

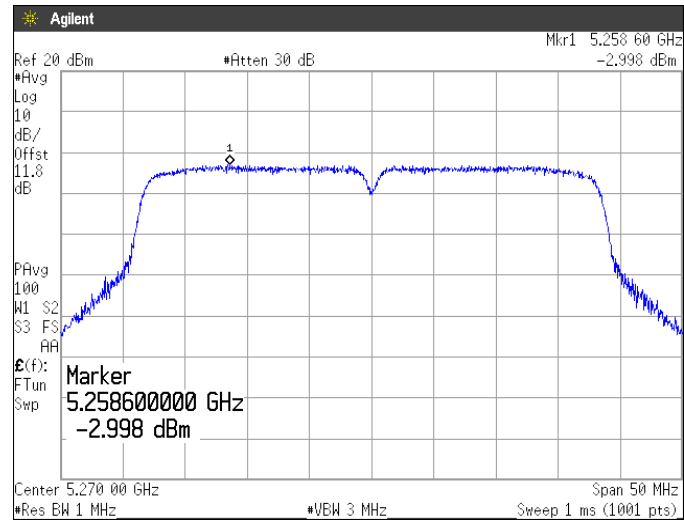


Channel: 62

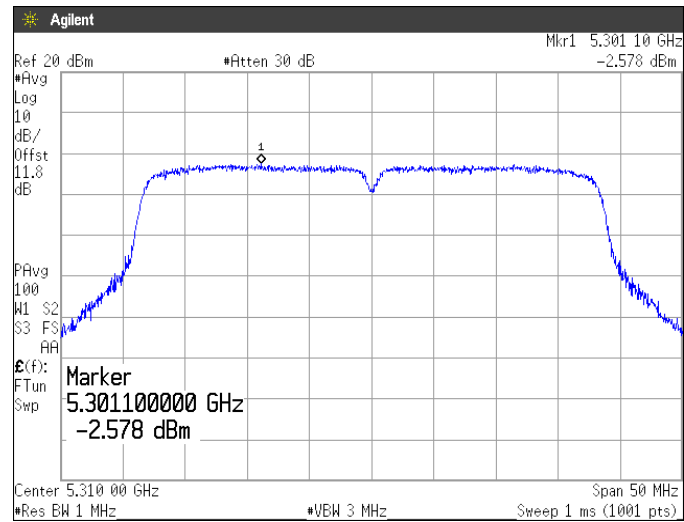


(5.6GHz Band)
Channel: 102

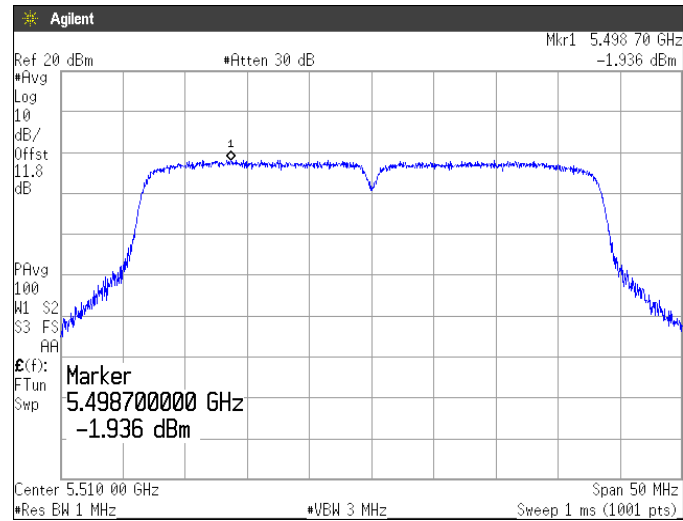


Channel: 110

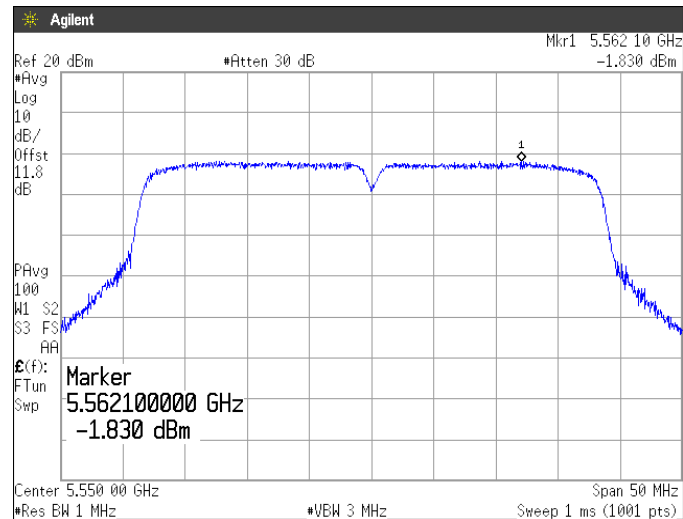


Channel: 134

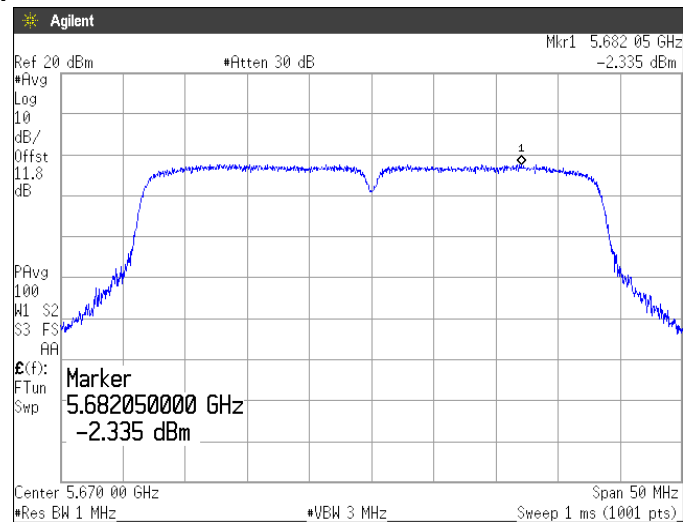


[IEEE802.11ac (HT80)]
(5.2GHz Band)
Channel: 42

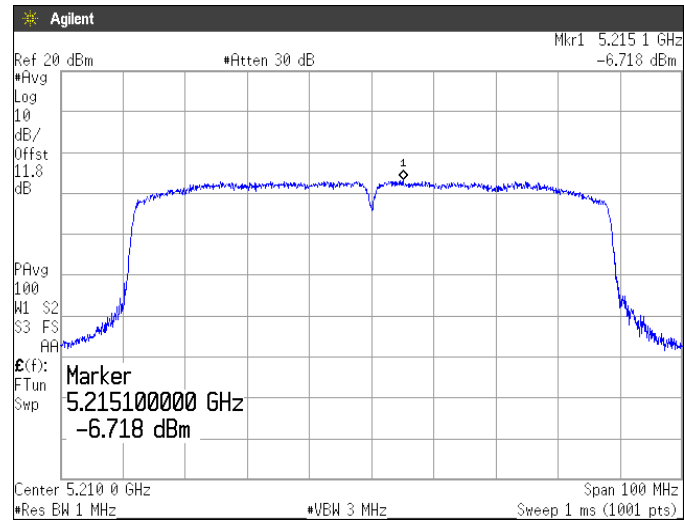


(5.3GHz Band)
Channel: 58

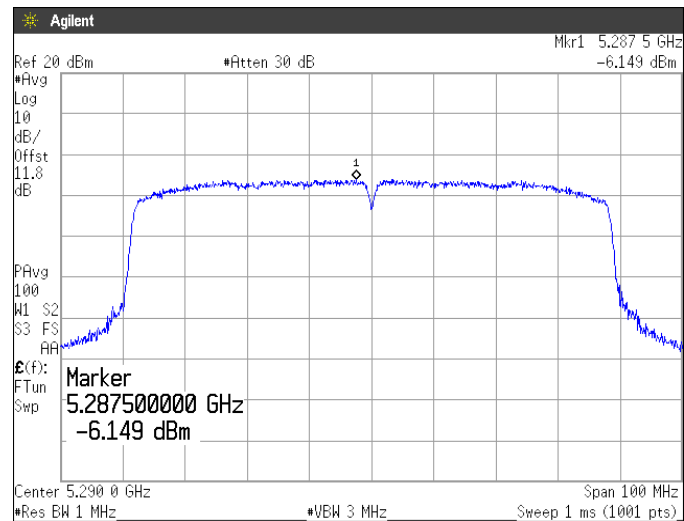

(5.6GHz Band)
Channel: 106

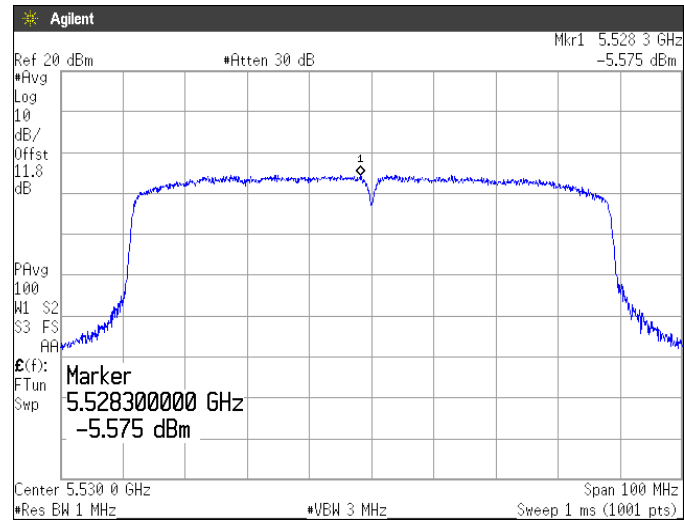

Channel: 122

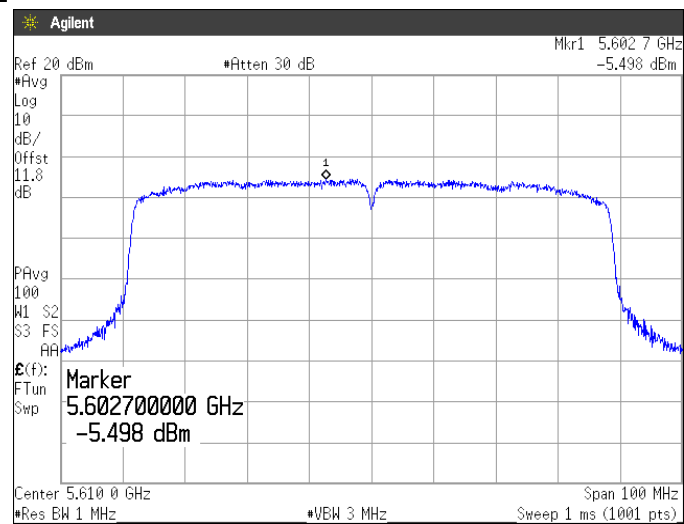

7. Radiated Emissions (Restricted Bands of Operation)

7.1 Measurement procedure

[FCC 15.407(b), 15.205, 15.209, KDB 789033 D02, Section G.4, 5, 6.c)Method AD]

Test was applied by following conditions.

Test method	: ANSI C63.10
Frequency range	: 30MHz to 40GHz
Test place	: 3m Semi-anechoic chamber No.1
EUT was placed on	: Styrofoam table / (W)1.0m × (D)1.0m ×(H)0.8m (below 1GHz) Styrofoam table / (W)1.5m × (D)1.0m ×(H)1.5m (above 1GHz)
Antenna distance	: 3m
Test receiver setting	Below 1GHz
- Detector	: Quasi-peak
- Bandwidth	: 120kHz
Spectrum analyzer setting	Above 1GHz
- Peak	: RBW=1MHz, VBW=3MHz, Span=0Hz, Sweep=auto, Detector=Peak Trace mode=Max hold
- Average	: RBW=1MHz, VBW=3MHz, Span=0Hz, Sweep=auto, Detector=RMS Trace mode=Averaging(300 counts)

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, Biconical antenna, Log periodic antenna, Double ridged guide antenna and Broad-band horn Antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop antenna is 1m above the ground plane.

The EUT is Placed on a turntable, which is 0.8m (below 1GHz) and 1.5m (above 1GHz) above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.


The EUT was set to operate with following conditions.

- 5.2GHz Band, 5.3GHz Band, 5.6GHz Band

The test mode of EUT is as follows.

- Tx mode, Rx mode

- Test configuration

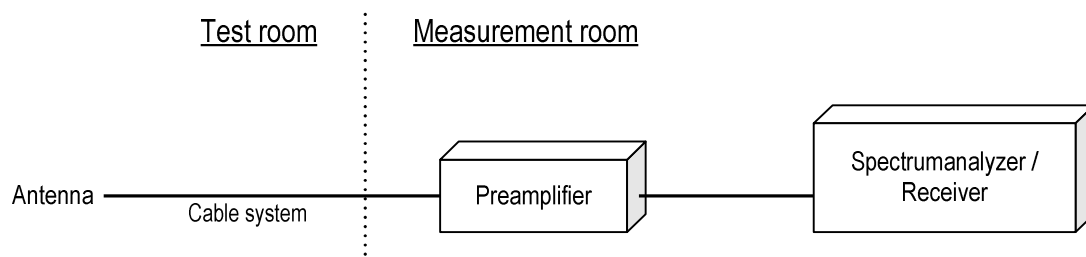

Duty cycle result

Mode	Band	On Time(ms)	On+Off Time(ms)	Duty Cycle (%)	DCF (dB)
802.11a	W52	1.364	1.372	99.417	-
	W53	1.364	1.372	99.417	-
	W56	1.364	1.372	99.417	-
802.11n (20MHz)	W52	1.274	1.284	99.221	-
	W53	1.276	1.284	99.377	-
	W56	1.274	1.284	99.221	-
802.11n (40MHz)	W52	0.635	0.646	98.297	-
	W53	0.634	0.645	98.295	-
	W56	0.634	0.646	98.142	-
802.11ac (80MHz)	W52	0.2475	0.2580	95.930	0.180
	W53	0.2480	0.2580	96.124	0.172
	W56	0.2470	0.2580	95.736	0.189

7.2 Calculation method

[150kHz to 25GHz]

Emission level = Reading + (Ant. factor + Cable system loss – Amp. Gain)

Margin = Limit – Emission level

Example:

Detector: Peak

Limit @ 5147.0MHz : 74.0dBuV/m (Peak Limit)

S.A Reading = 40.9dBuV Cable system loss = 16.4dB

Result = 40.9 + 16.4 = 57.3dBuV/m

Margin = 74.0 – 57.3 = 16.7dB

7.3 Limit

- (1) For transmitters operating in the 5.15-5.25GHz band: all emissions outside of the 5.15-5.35GHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35GHz band: all emissions outside of the 5.15-5.35GHz band shall not exceed an EIRP of -27dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: all emissions outside of the 5.47 5-5.725GHz band shall not exceed an EIRP of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85GHz band: all emissions within the frequency range from the band edge to 10MHz above or below the band edge shall not exceed an EIRP of -17dBm/MHz; for frequencies 10MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27dBm/MHz.

Frequency [MHz]	Field strength		Distance [m]
	[uV/m]	[dBuV/m]	
0.009-0.490	2400 / F [kHz]	20logE [uV/m]	300
0.490-1.705	24000 / F [kHz]	20logE [uV/m]	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20log Emission [uV/m]
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition modulation.

7.4 Test data


Date : April 24, 2017
 Temperature : 23.8 [°C]
 Humidity : 24.2 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Taiki Watanabe


7.4.1 Restricted Bandedge

[IEEE802.11a]


5.2GHz Band, Channel Low
 Horizontal
 Peak

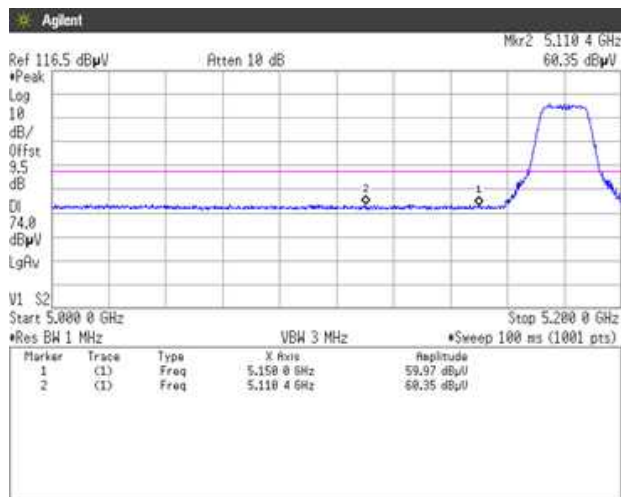


Average

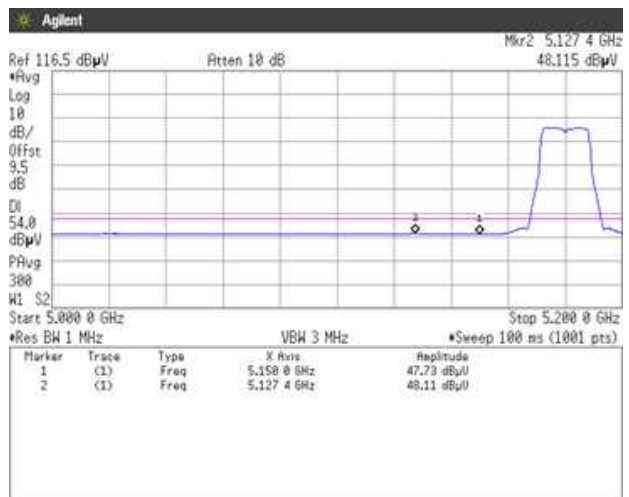

Vertical
 Peak

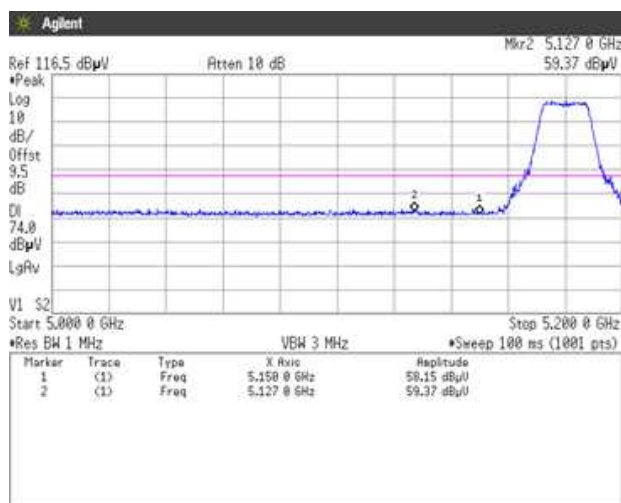


Average

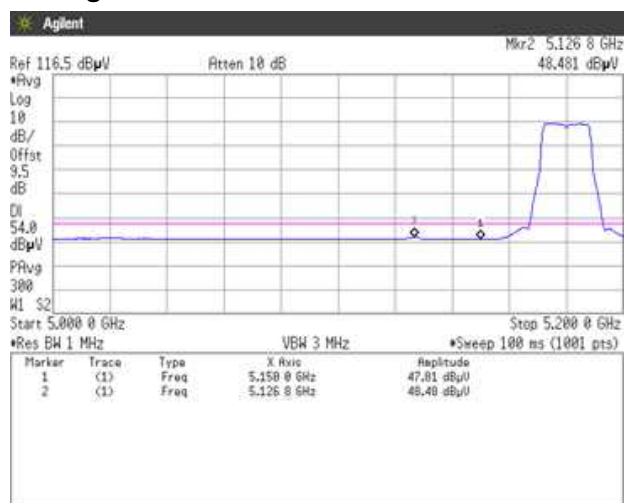


[IEEE802.11a]


5.3GHz Band, Channel High
Horizontal
Peak

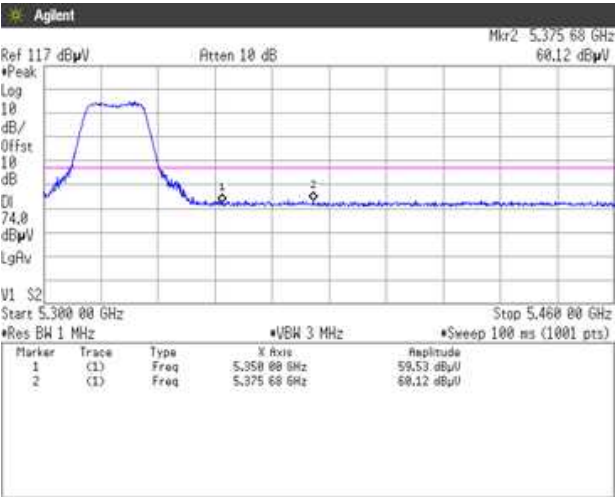


Average

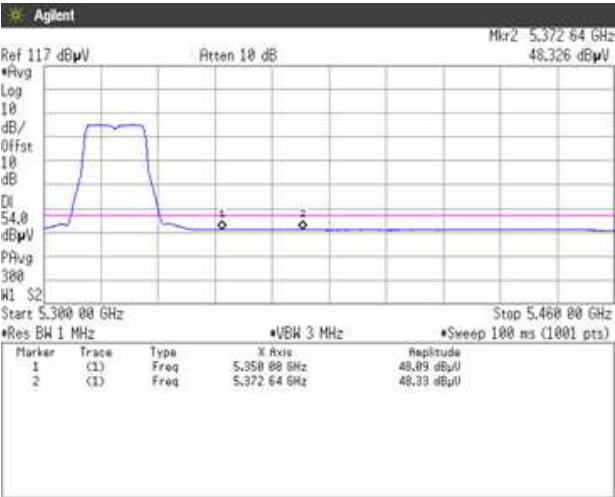

Vertical
Peak

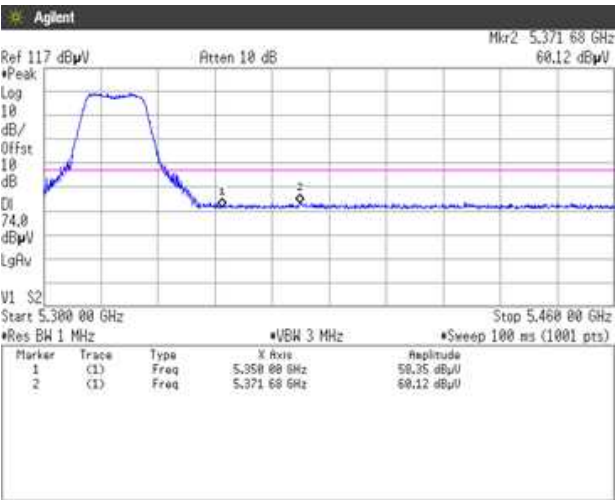


Average

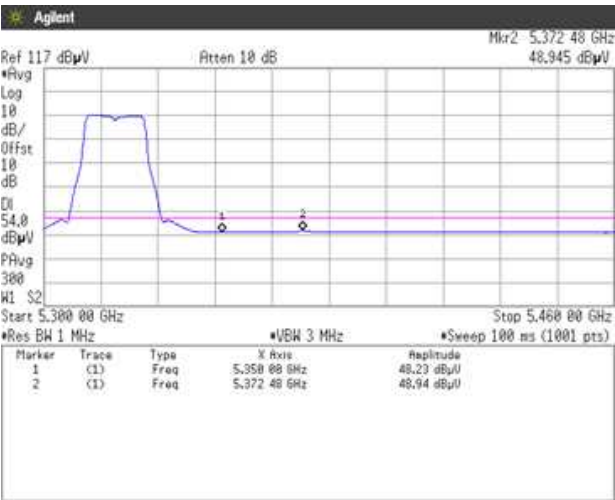


[IEEE802.11a]


5.6GHz Band, Channel Low
Horizontal
Peak

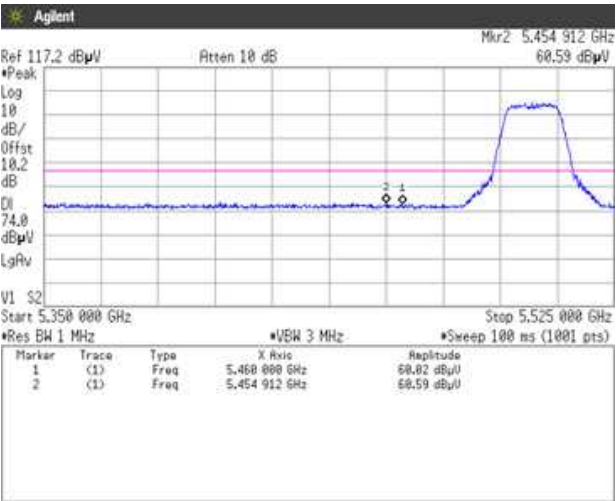


Average

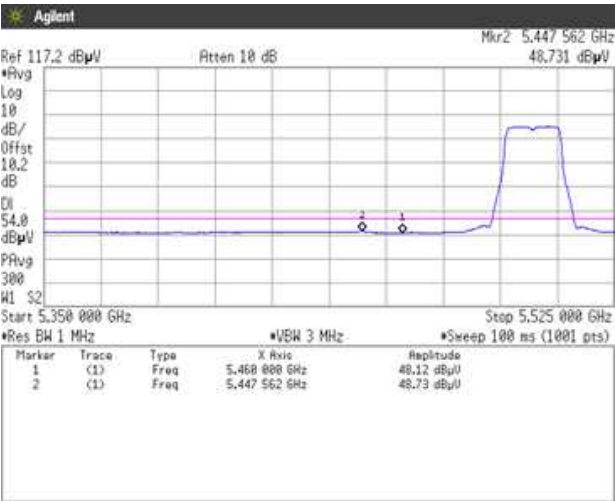

Vertical
Peak

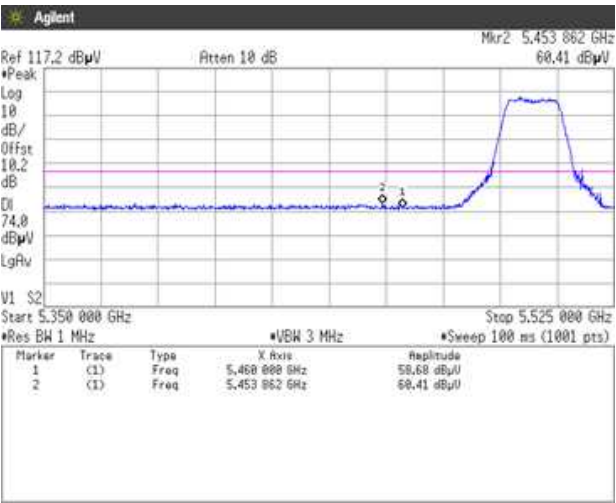


Average

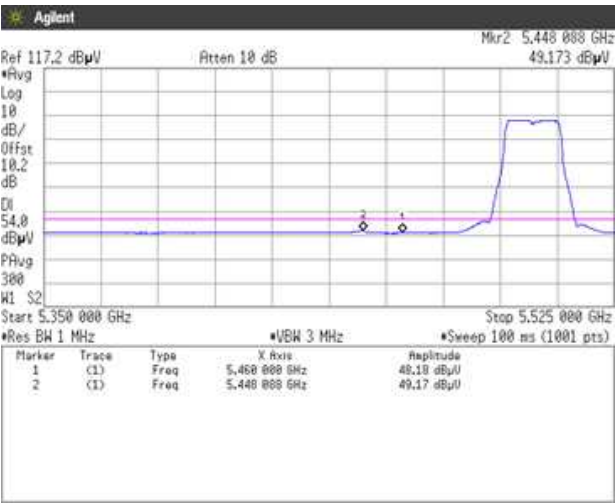


[IEEE802.11n (HT20)]

5.2GHz Band, Channel Low
Horizontal
Peak

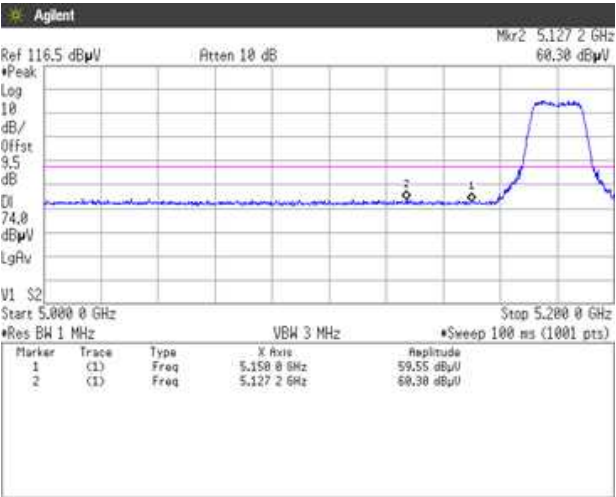


Average

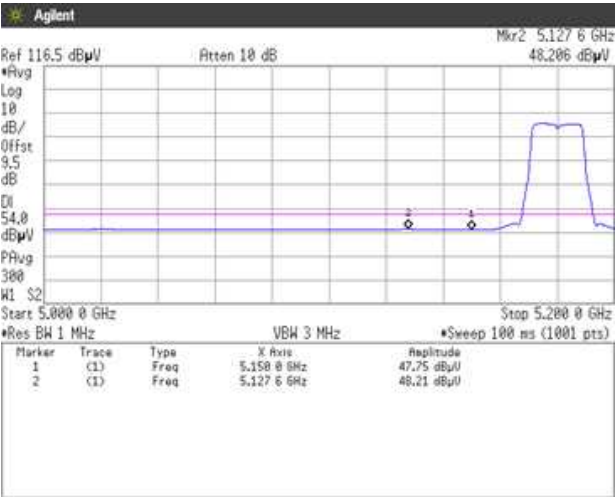

Vertical
Peak




Average

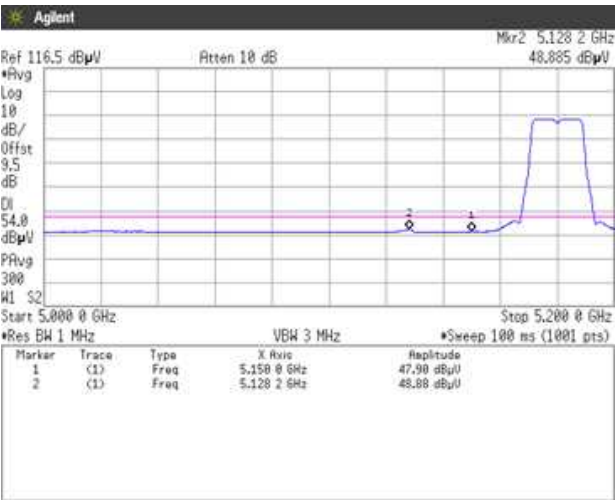


[IEEE802.11n (HT20)]


5.3GHz Band, Channel High
Horizontal
Peak

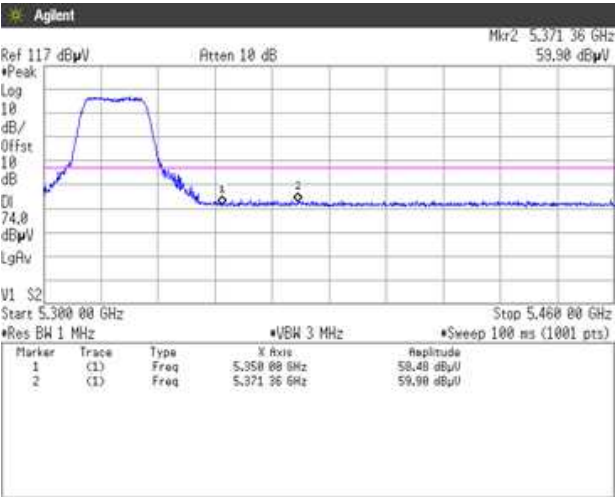


Average

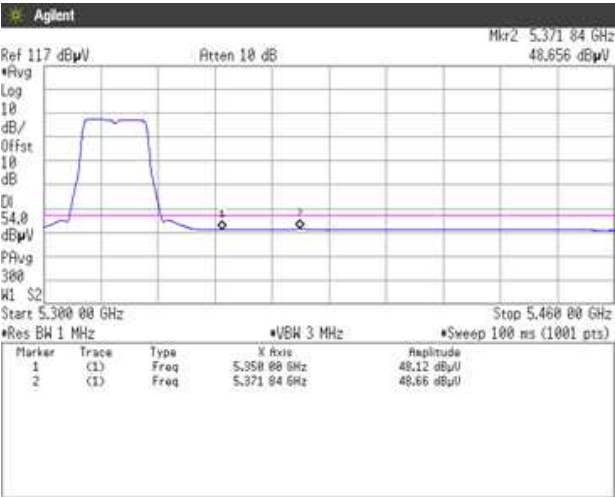

Vertical
Peak

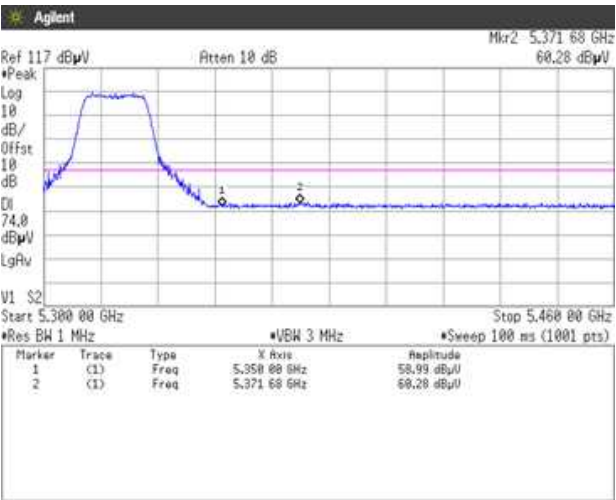


Average

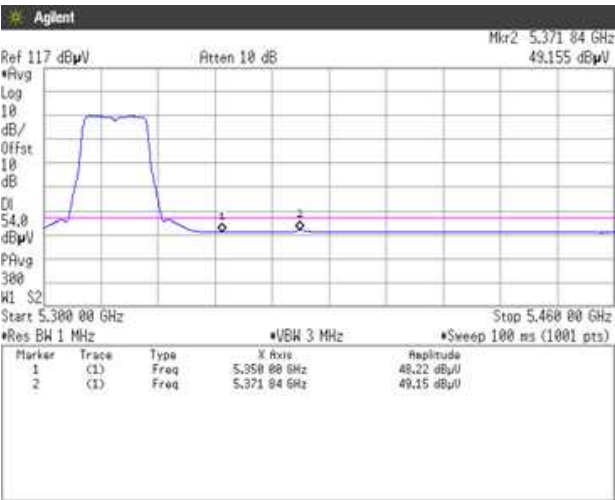


[IEEE802.11n (HT20)]


5.6GHz Band, Channel Low Horizontal Peak

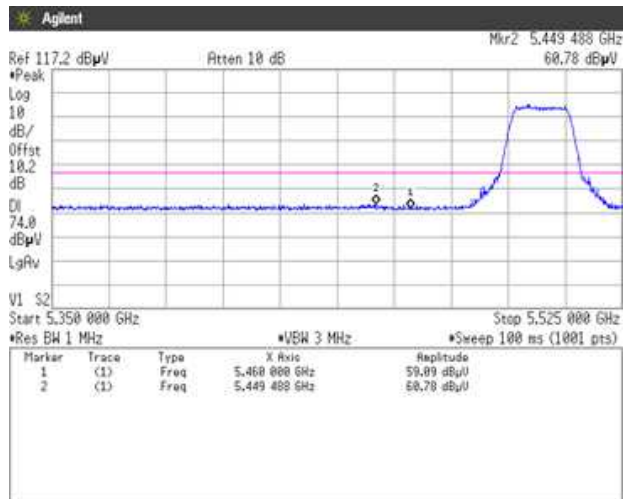


Average

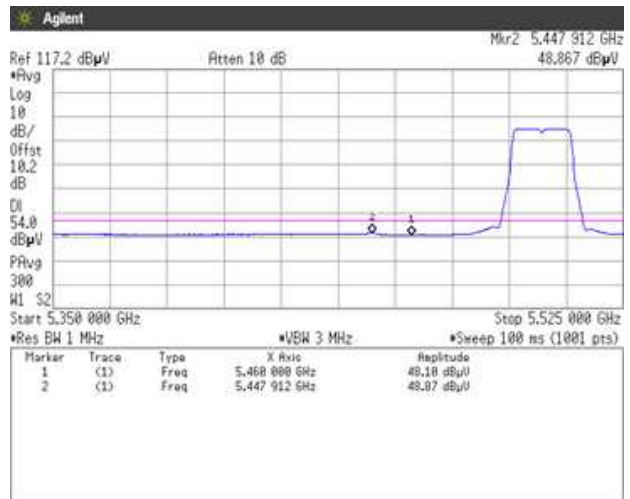

Vertical Peak

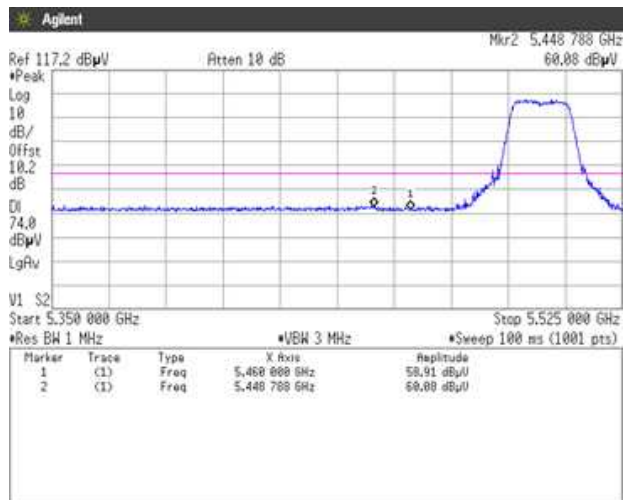


Average

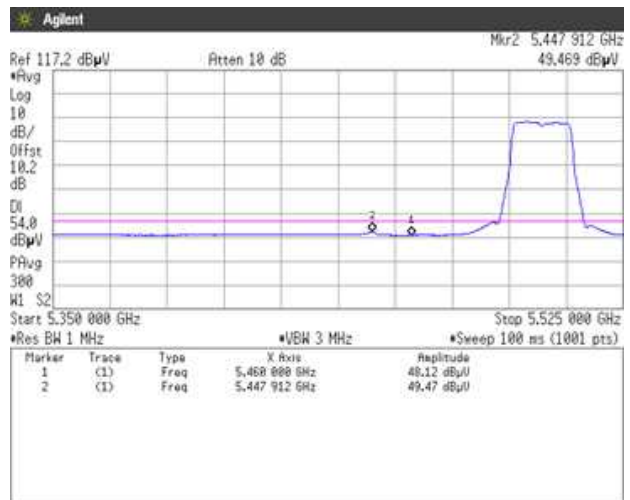


[IEEE802.11n (HT40)]


5.2GHz Band, Channel Low
Horizontal
Peak

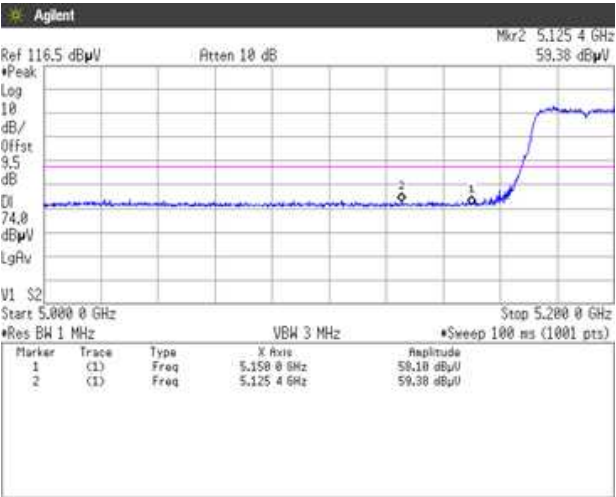


Average

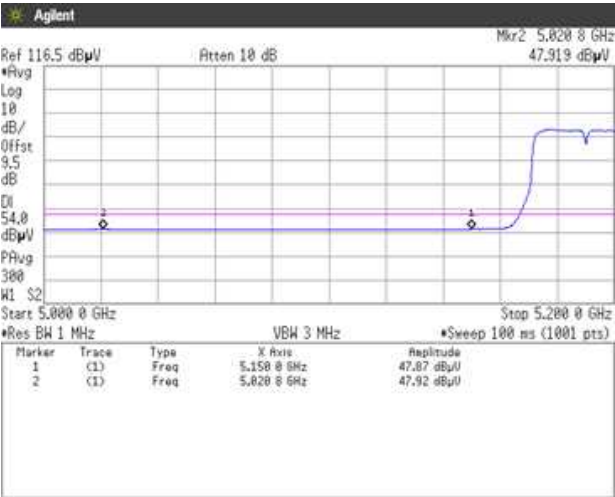

Vertical
Peak

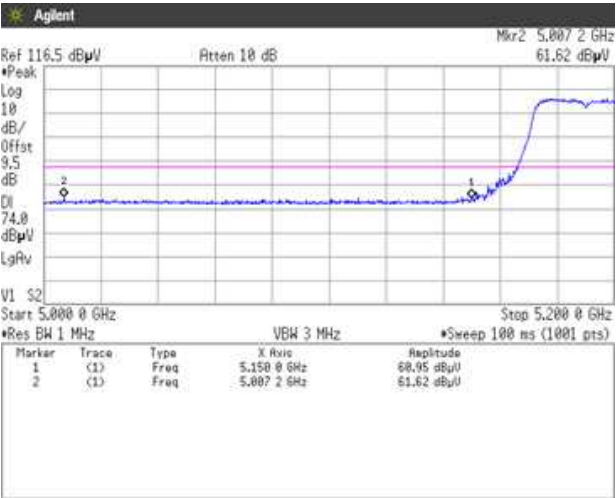


Average

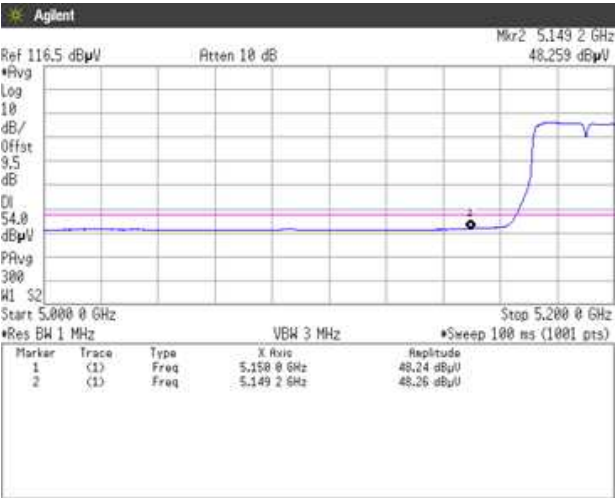


[IEEE802.11n (HT40)]


5.3GHz Band, Channel High
Horizontal
Peak

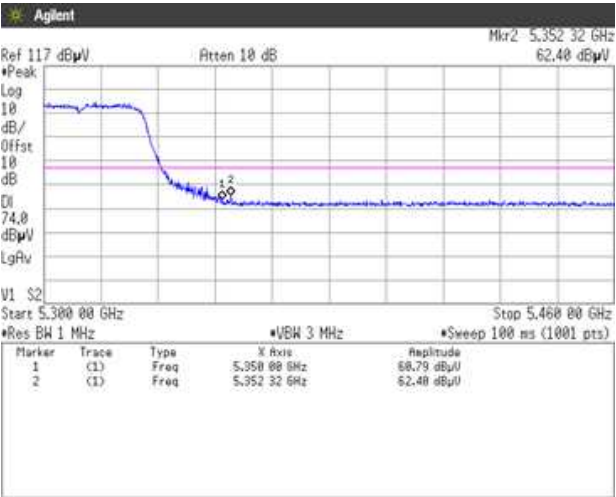


Average

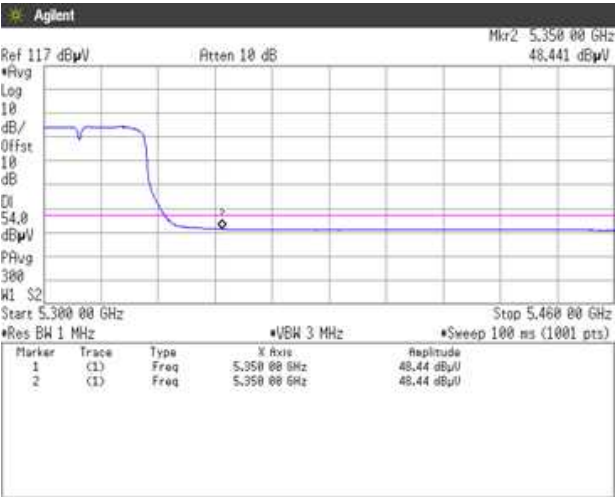

Vertical
Peak

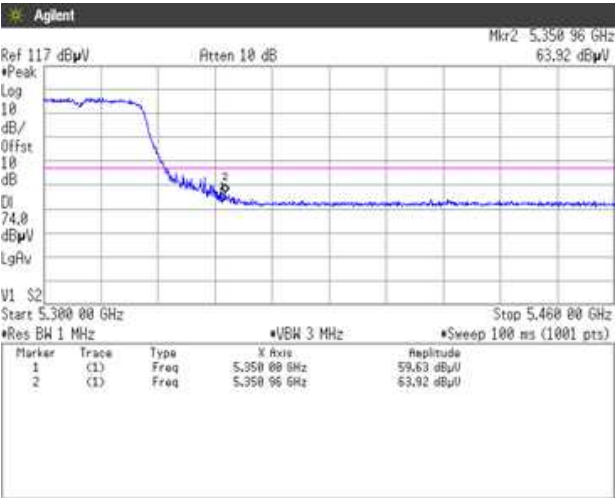


Average

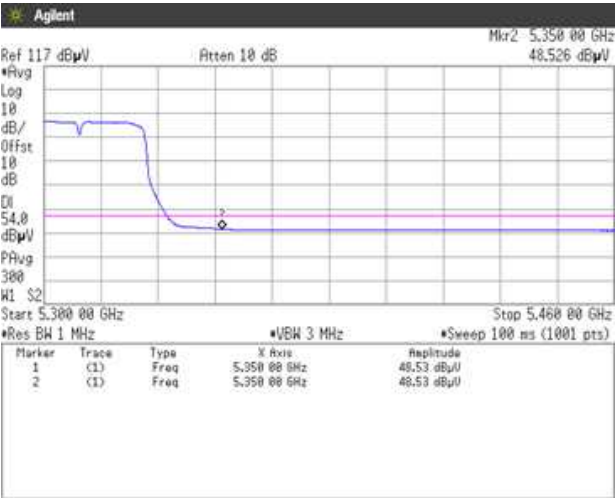


[IEEE802.11n (HT40)]


5.6GHz Band, Channel Low Horizontal Peak

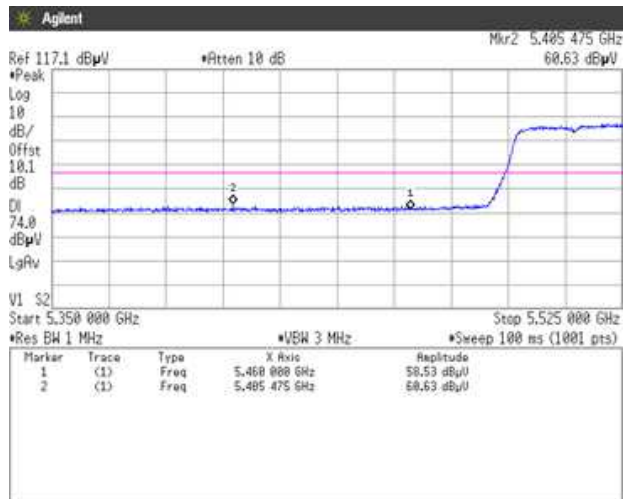


Average

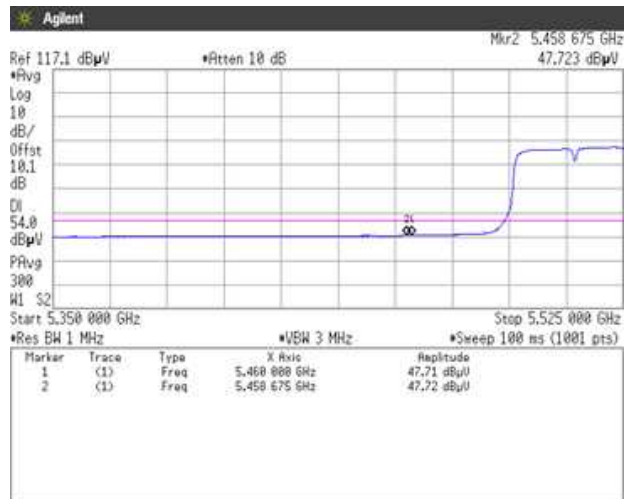

Vertical Peak

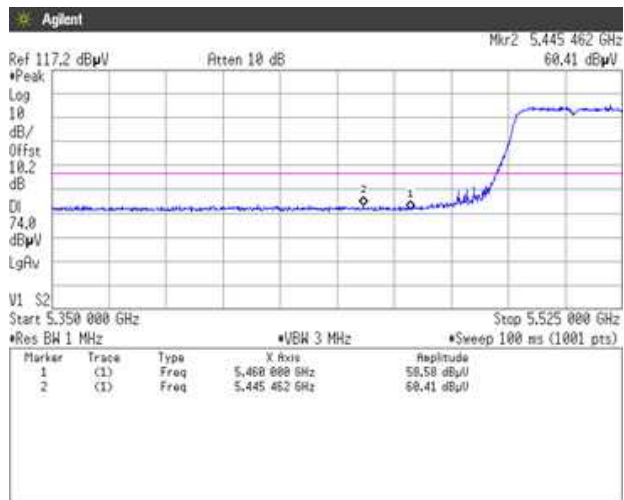


Average

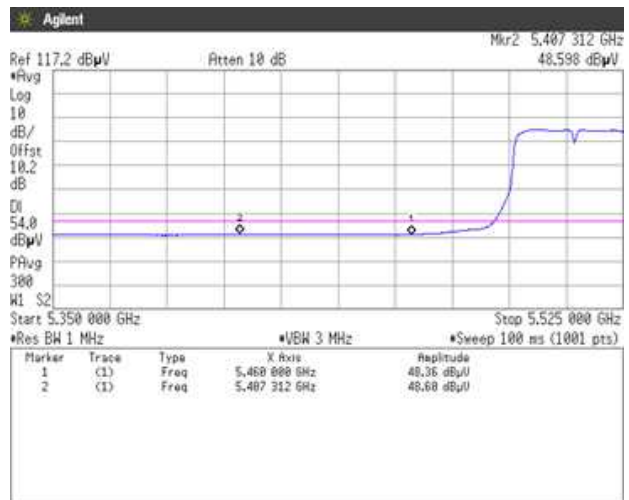


[IEEE802.11ac (HT80)]


5.2GHz Band, Channel Low
Horizontal
Peak

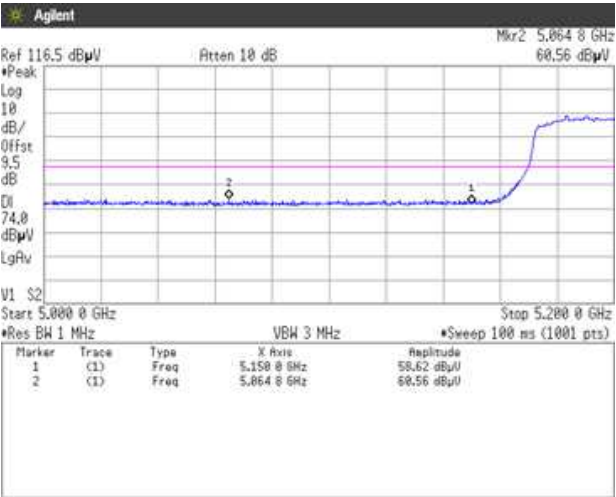


Average

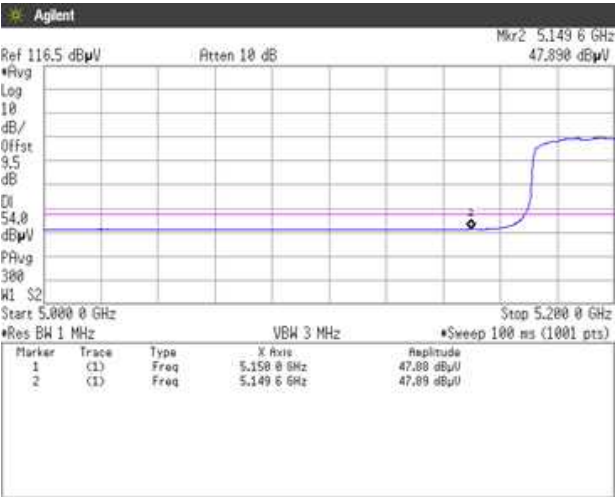

Vertical
Peak

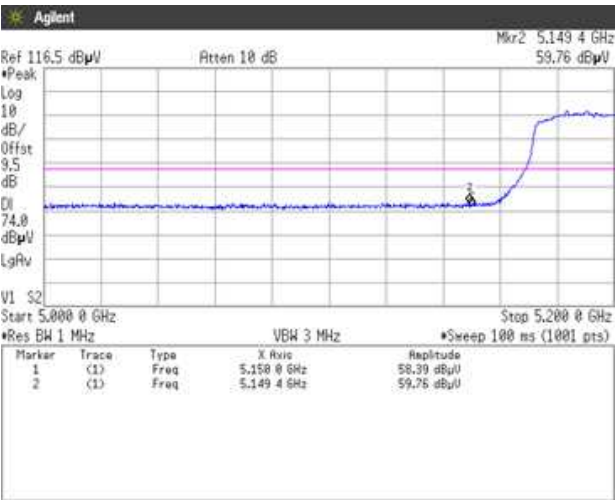


Average

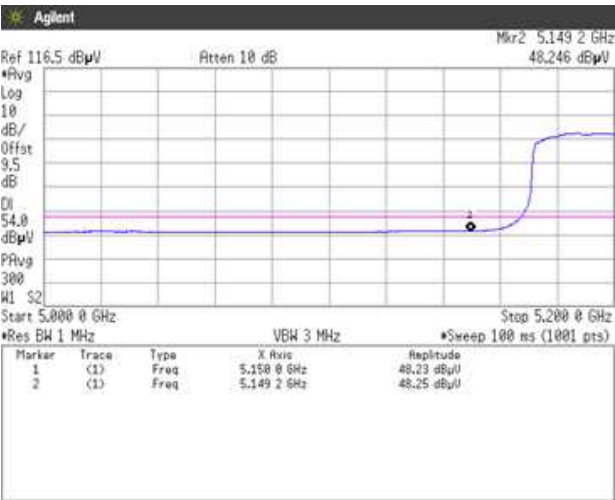


[IEEE802.11ac (HT80)]


5.3GHz Band, Channel High
Horizontal
Peak

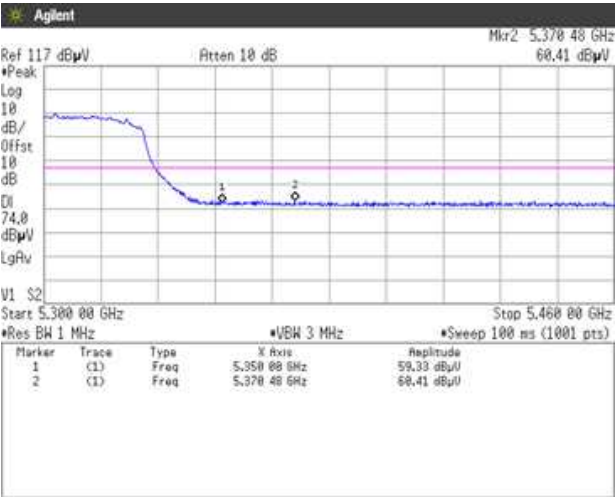


Average

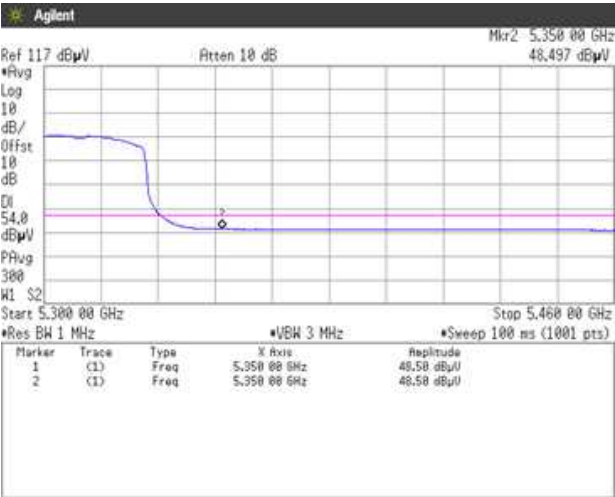

Vertical
Peak

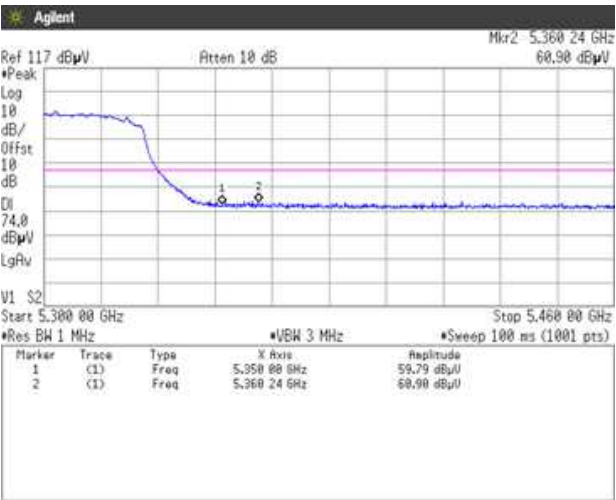


Average

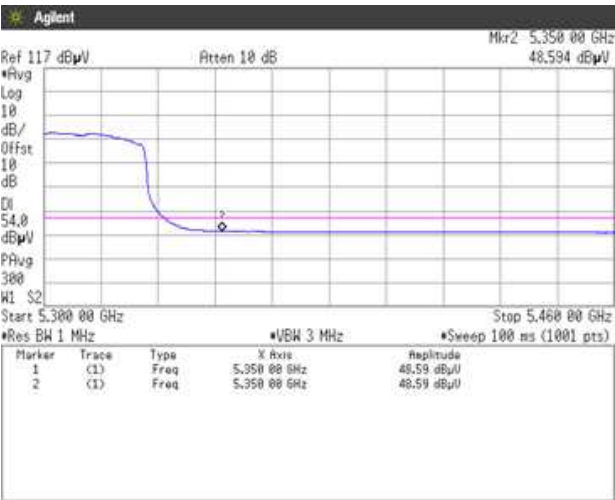


[IEEE802.11ac (HT80)]


5.6GHz Band, Channel Low
Horizontal
Peak

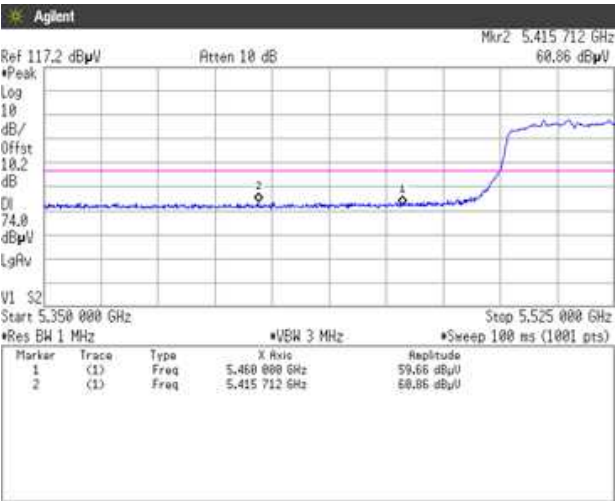


Average

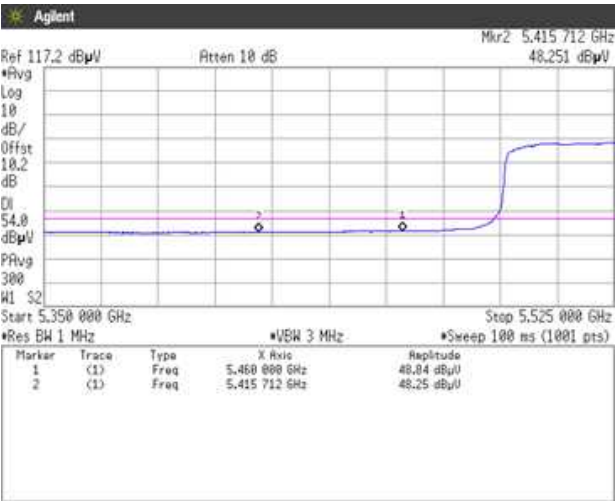

Vertical
Peak

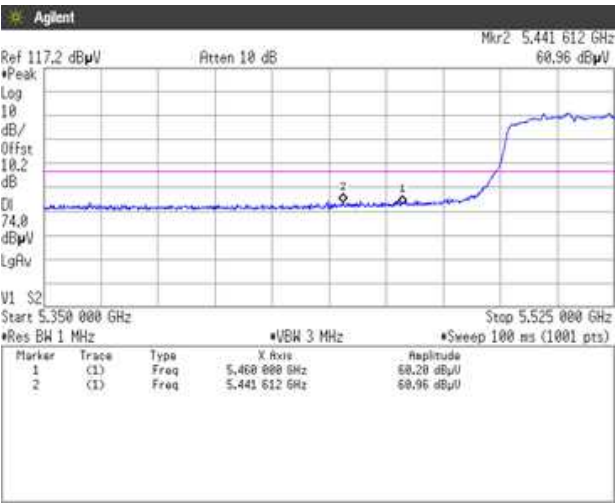


Average

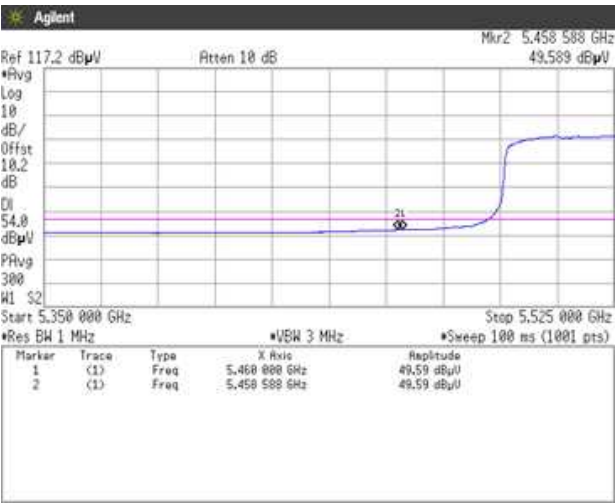


7.4.2 Non-Restricted Bandedge

[IEEE802.11a]

5.6GHz Band, Channel High
Peak
Horizontal

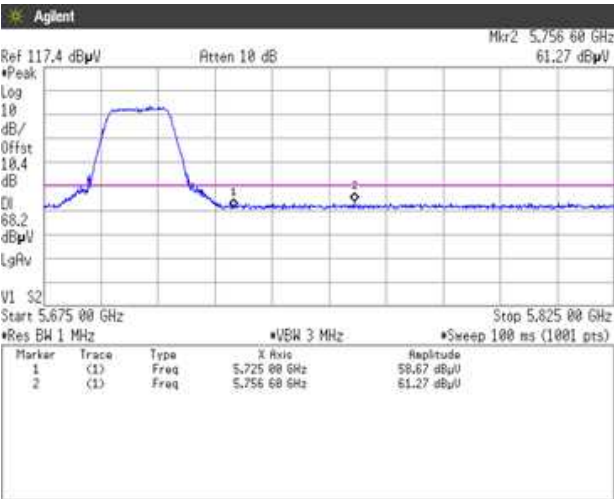


Vertical

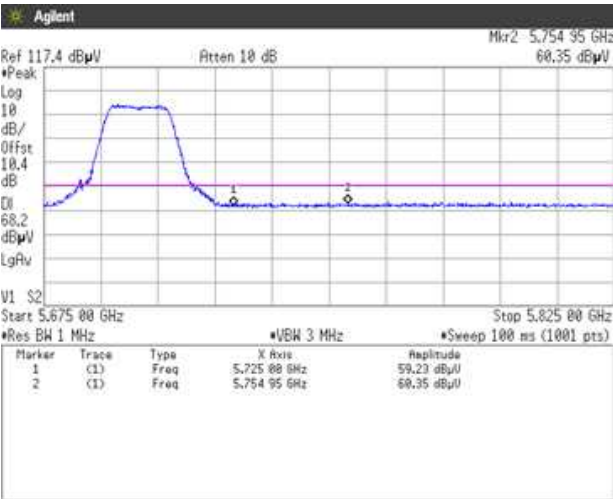


[IEEE802.11n (HT20)]



5.6GHz Band, Channel High
Peak
Horizontal

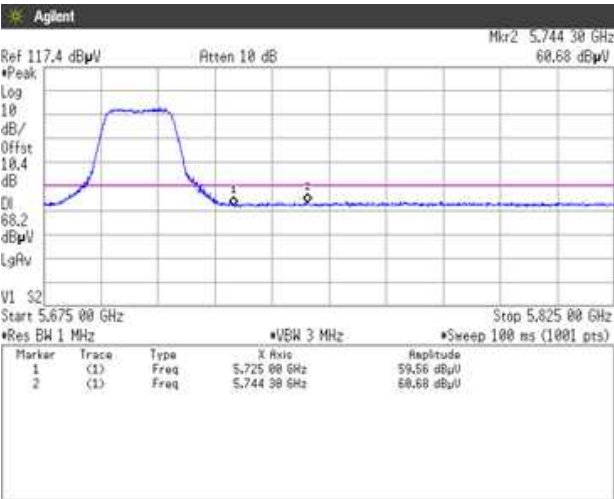



Vertical

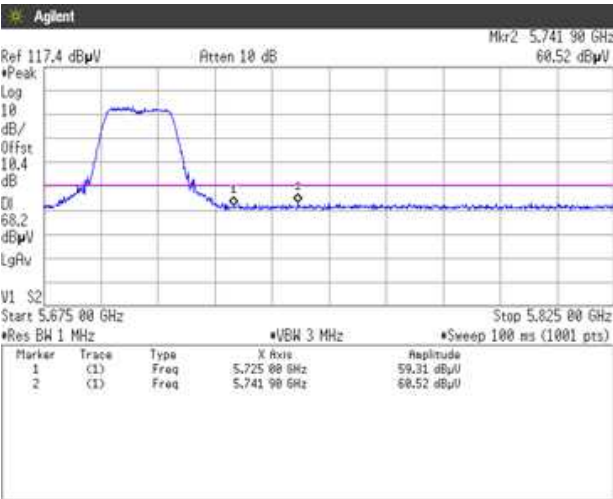

[IEEE802.11n (HT40)]

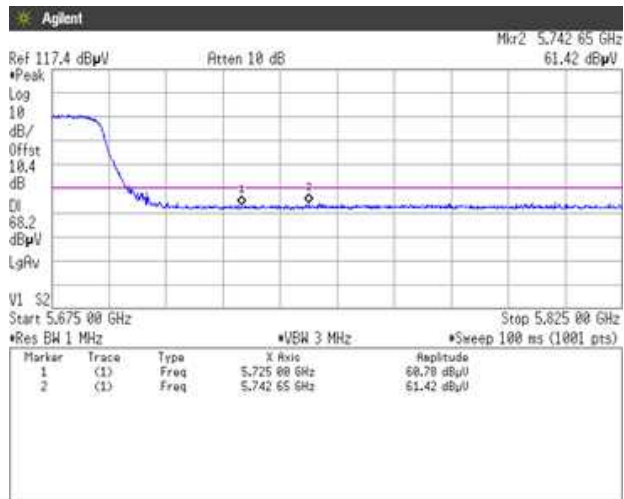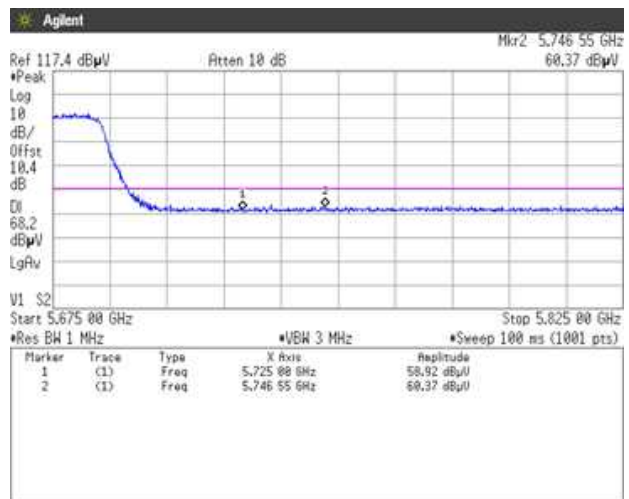**5.6GHz Band, Channel High
Peak
Horizontal**
**Vertical**

[IEEE802.11ac (HT80)]

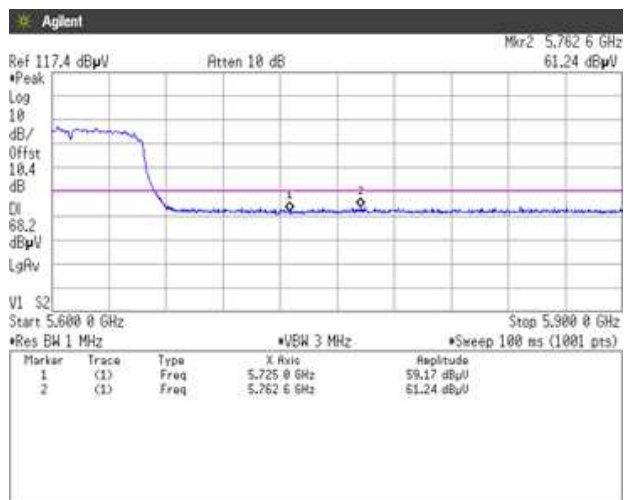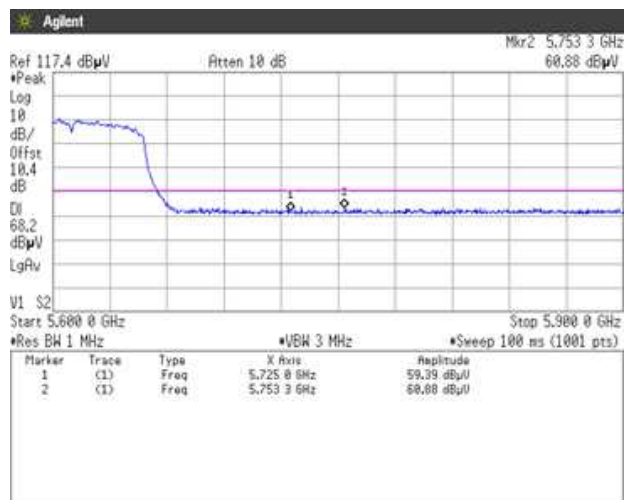**5.6GHz Band, Channel High
Peak
Horizontal**
**Vertical**

7.4.3 Radiated Emissions

Date	: April 12, 2017		
Temperature	: 23.8 [°C]		
Humidity	: 26.2 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Hikaru Shibata</u>
Date	: April 13, 2017		
Temperature	: 23.3 [°C]		
Humidity	: 20.1 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Hikaru Shibata</u>
Date	: April 14, 2017		
Temperature	: 24.3 [°C]		
Humidity	: 21.6 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Hikaru Shibata</u>
Date	: April 14-15, 2017		
Temperature	: 21.4 [°C]		
Humidity	: 24.8 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Hikaru Shibata</u>
Date	: April 17, 2017		
Temperature	: 20.3 [°C]		
Humidity	: 33.3 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	: April 18, 2017		
Temperature	: 21.5 [°C]		
Humidity	: 42.0 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	: April 19, 2017		
Temperature	: 23.8 [°C]		
Humidity	: 27.7 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	: April 20, 2017		
Temperature	: 24.3 [°C]		
Humidity	: 23.1 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>

**[IEEE802.11a]
(5.2GHz Band)**

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a	36	5180	10360.00	H	PK	47.7	10.3		58.0	68.2	10.2
	40	5200	10400.00	H	PK	47.1	10.3		57.4	68.2	10.8
	48	5240	10480.00	H	PK	46.8	10.5		57.3	68.2	10.9

(5.3GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a	52	5260	10520.00	H	PK	47.1	10.5		57.6	68.2	10.6
	56	5280	10560.00	H	PK	46.6	10.5		57.1	68.2	11.1
	64	5320	10640.00	H	PK	47.9	10.6		58.5	74.0	15.5
			10640.00	H	AV	40.1	10.6		50.7	54.0	3.3

(5.6GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a	100	5500	5466.50	H	PK	49.7	10.1		59.8	68.2	8.4
			5467.00	V	PK	50.2	10.1		60.3	68.2	7.9
			11000.00	V	PK	48.5	10.9		59.4	74.0	14.6
			11000.00	V	AV	36.9	10.9		47.8	54.0	6.2
	116	5580	11160.00	V	PK	47.9	10.9		58.8	74.0	15.2
			11160.00	V	AV	42.1	10.9		53.0	54.0	1.0
	140	5700	11400.00	V	PK	47.1	11.1		58.2	74.0	15.8
			11400.00	V	AV	35.9	11.1		47.0	54.0	7.0

Note:

1. Emission Level (Margin) = Limit - [Reading + C.F (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 30MHz to 1000MHz at the 3 meters distance.
3. No emission was detected in the receive mode.

[IEEE802.11n (HT20)] (5.2GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (20MHz)	36	5180	10360.00	H	PK	47.8	10.3		58.1	68.2	10.1
	40	5200	10400.00	H	PK	47.4	10.3		57.7	68.2	10.5
	48	5240	10480.00	H	PK	47.1	10.5		57.6	68.2	10.6

(5.3GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (20MHz)	52	5260	10520.00	H	PK	47.3	10.5		57.8	68.2	10.4
	56	5280	10560.00	H	PK	46.6	10.5		57.1	68.2	11.1
	64	5320	10640.00	H	PK	46.9	10.6		57.5	74.0	16.5
			10640.00	H	AV	38.9	10.6		49.5	54.0	4.5

(5.6GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (20MHz)	100	5500	5461.50	H	PK	50.3	10.2		60.5	68.2	7.7
			5465.40	V	PK	50.1	10.2		60.3	68.2	7.9
			11000.00	H	PK	46.6	11.1		57.7	74.0	16.3
			11000.00	H	AV	39.4	11.1		50.5	54.0	3.5
	116	5580	11160.00	H	PK	46.6	11.2		57.8	74.0	16.2
			11160.00	H	AV	38.1	11.2		49.3	54.0	4.7
	140	5700	11400.00	H	PK	47.0	11.5		58.5	74.0	15.5
			11400.00	H	AV	38.8	11.5		50.3	54.0	3.7

Note:

1. Emission Level (Margin) = Limit - [Reading + C.F (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 30MHz to 1000MHz at the 3 meters distance.
3. No emission was detected in the receive mode.

[IEEE802.11n (HT40)]
(5.2GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (40MHz)	38	5190	10380.00	H	PK	47.1	10.3		57.4	68.2	10.8
	46	5230	10460.00	H	PK	47.4	10.4		57.8	68.2	10.4

(5.3GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (40MHz)	54	5270	10540.00	H	PK	47.2	10.5		57.7	68.2	10.5
	62	5310	10620.00	H	PK	46.4	10.5		56.9	74.0	17.1
			10620.00	H	AV	39.0	10.5		49.5	54.0	4.5

(5.6GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (40MHz)	102	5510	5468.02	H	PK	50.8	10.2		61.0	68.2	7.2
			5461.78	V	PK	50.2	10.2		60.4	68.2	7.8
			11020.00	H	PK	47.1	11.1		58.2	74.0	15.8
			11020.00	H	AV	39.3	11.1		50.4	54.0	3.6
	110	5550	11100.00	H	PK	47.4	11.2		58.6	74.0	15.4
			11100.00	H	AV	38.8	11.2		50.0	54.0	4.0
	134	5670	11340.00	H	PK	46.4	11.4		57.8	74.0	16.2
			11340.00	H	AV	37.9	11.4		49.3	54.0	4.7

Note:

1. Emission Level (Margin) = Limit - [Reading + C.F (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 30MHz to 1000MHz at the 3 meters distance.
3. No emission was detected in the receive mode.

[IEEE802.11ac (HT80)]**(5.2GHz Band)**

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac (80MHz)	42	5210	10420.00	H	PK	46.2	10.4		56.6	68.2	11.6

(5.3GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac (80MHz)	58	5290	10580.00	H	PK	46.6	10.5		57.1	68.2	11.1

(5.6GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac (80MHz)	106	5530	5467.60	H	PK	50.6	10.2		60.8	68.2	7.4
			5467.60	V	PK	51.0	10.2		61.2	68.2	7.0
			11060.00	H	PK	46.3	11.2		57.5	74.0	16.5
			11060.00	H	AV	37.9	11.2	0.189	49.3	54.0	4.7
	122	5610	11220.00	H	PK	46.5	11.3		57.8	74.0	16.2
			11220.00	H	AV	37.6	11.3	0.189	49.1	54.0	4.9

Note:

1. Emission Level (Margin) = Limit - [Reading + C.F (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 30MHz to 1000MHz at the 3 meters distance.
3. No emission was detected in the receive mode.


7.4.4 Measurement chart

7.4.4.1 Transmission mode

[11a]

W52 / Channel Low
BELOW 1GHz

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

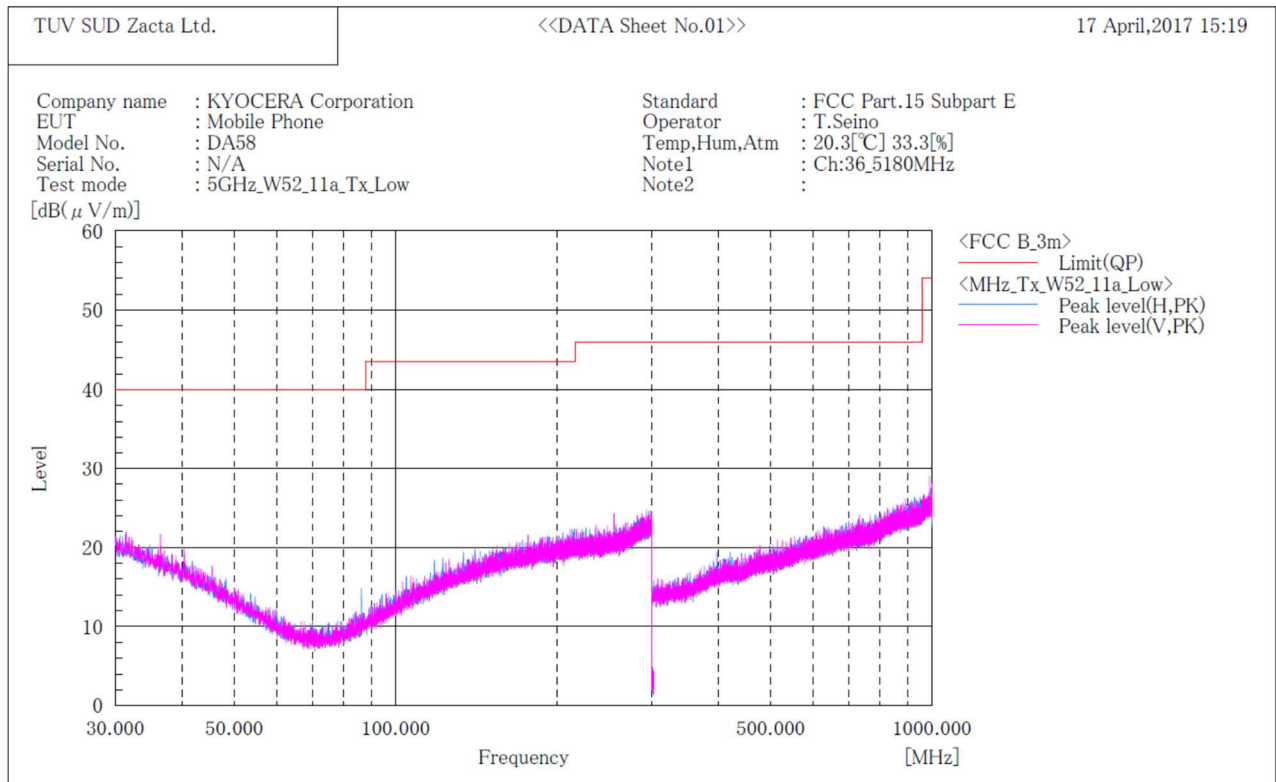

Final Result


No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11a]
W52 / Channel Low
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

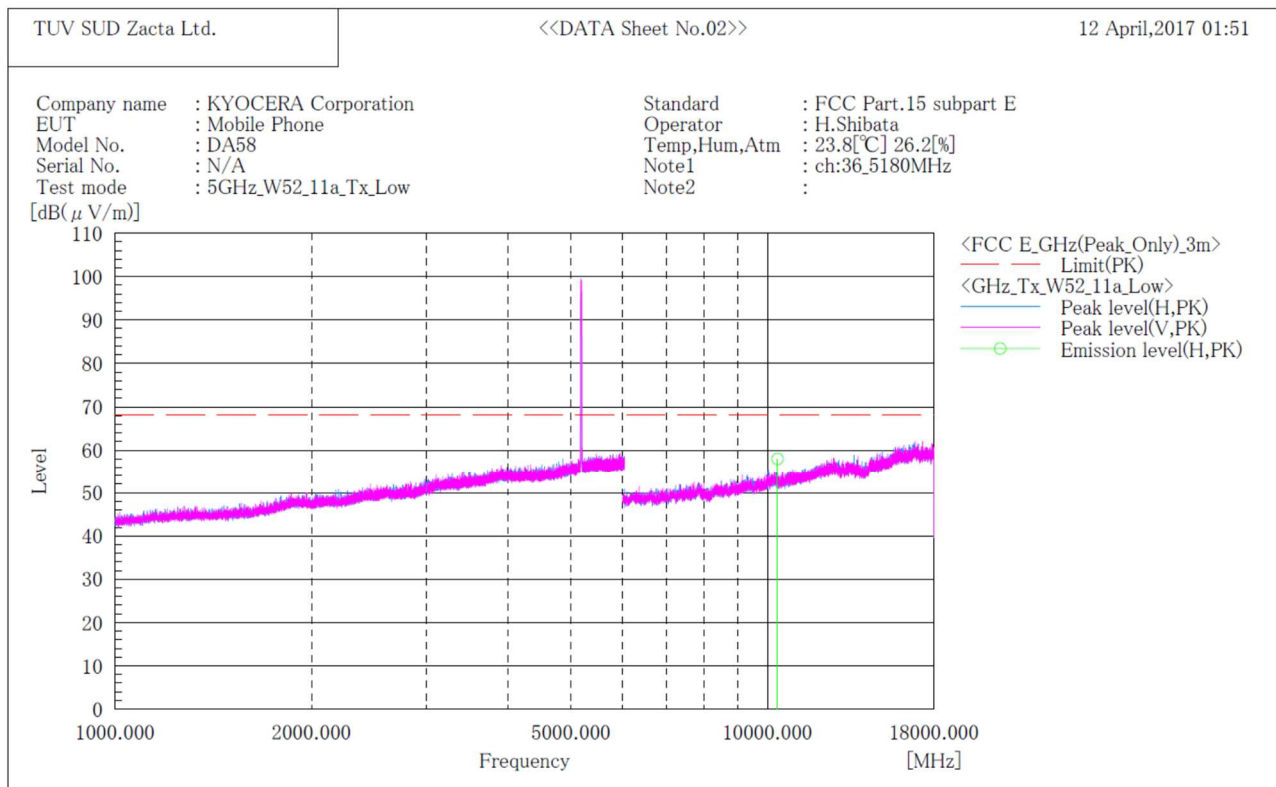

Final Result


No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]	Remark
1	10360.000	H	47.7	10.3	58.0	68.2	10.2	168.0	117.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

[11a]
W52 / Channel Middle
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

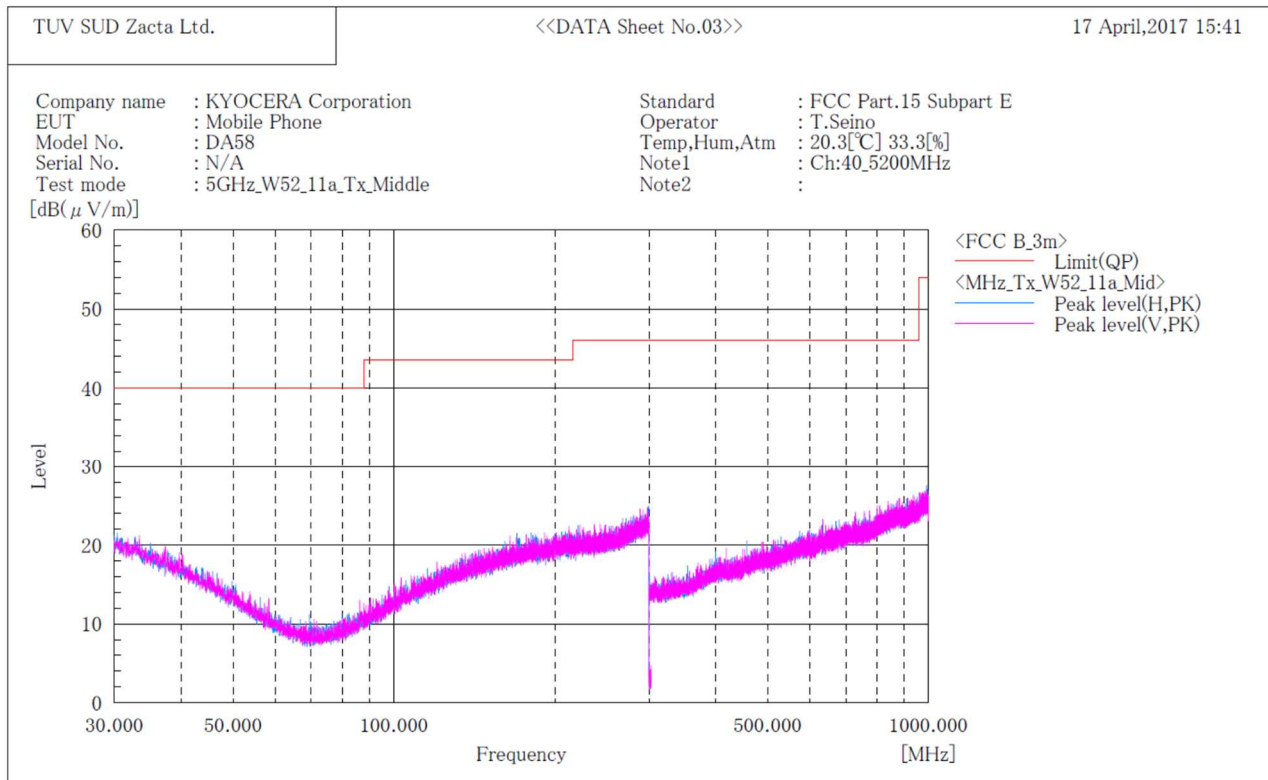

Final Result

No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



Zacta

[11a]
W52 / Channel Middle
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

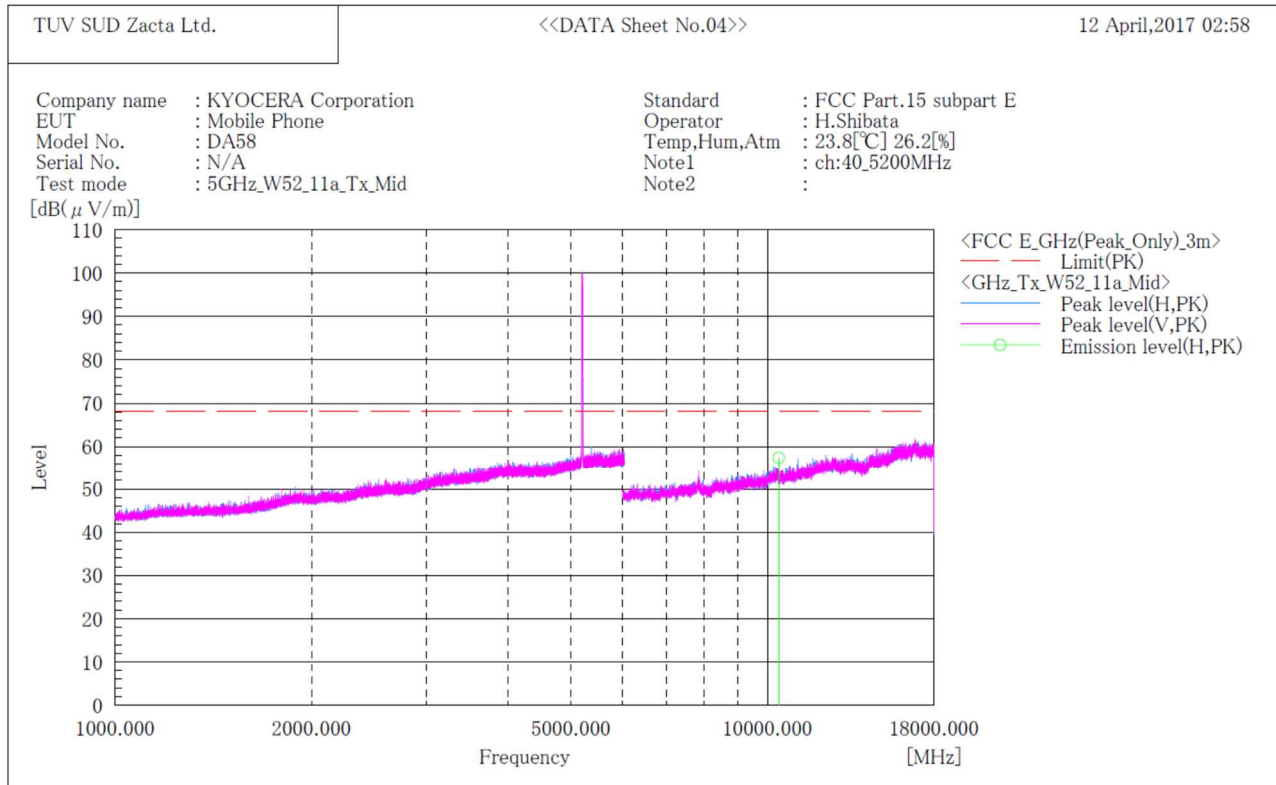

Final Result


No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		PK [dB(μV)]	[dB(1/m)]	PK [dB(μV/m)]	PK [dB(μV/m)]	PK [dB]	[cm]	[°]	
1	10400.000	H	47.1	10.3	57.4	68.2	10.8	151.0	163.0	

Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

[11a]
W52 / Channel High
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

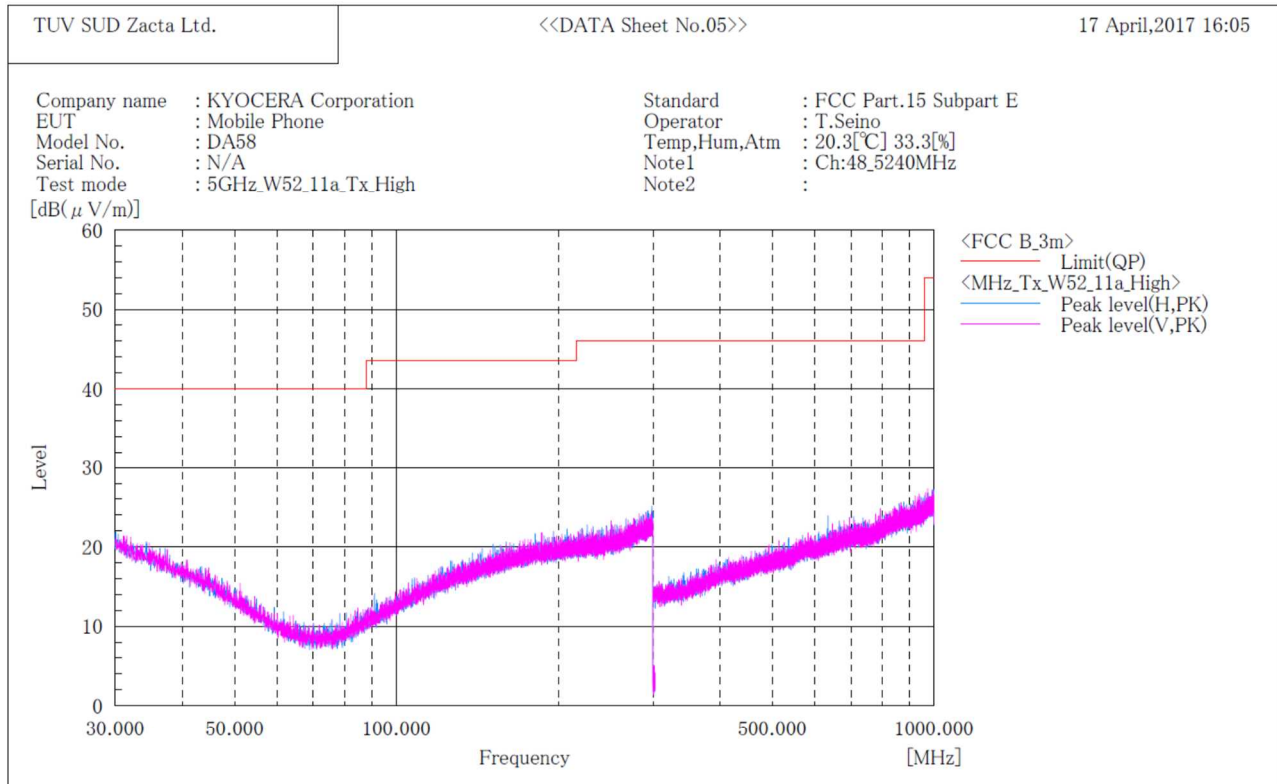

Final Result

No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



Zacta

[11a]
W52 / Channel High
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

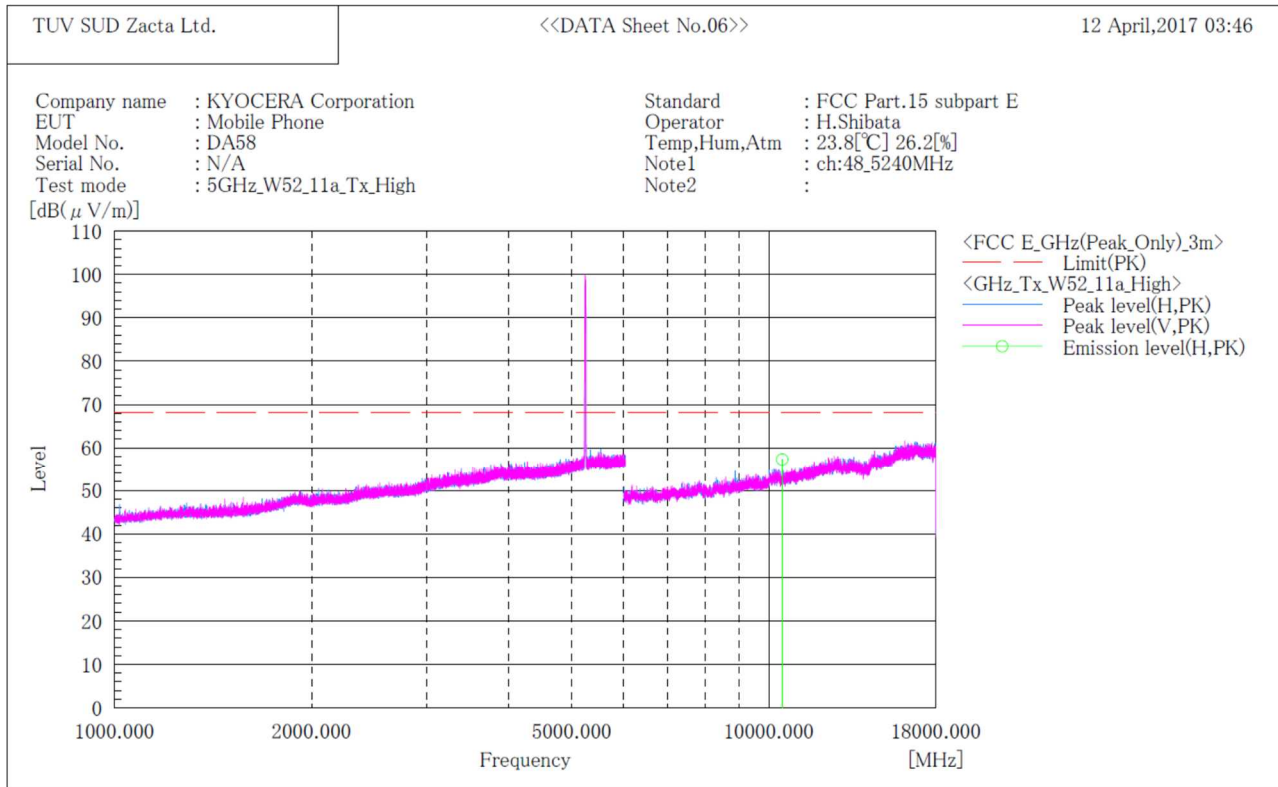

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]	Remark
1	10480.000	H	46.8	10.5	57.3	68.2	10.9	156.0	119.0	

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



Zacta

**[11a]
W53 / Channel Low
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

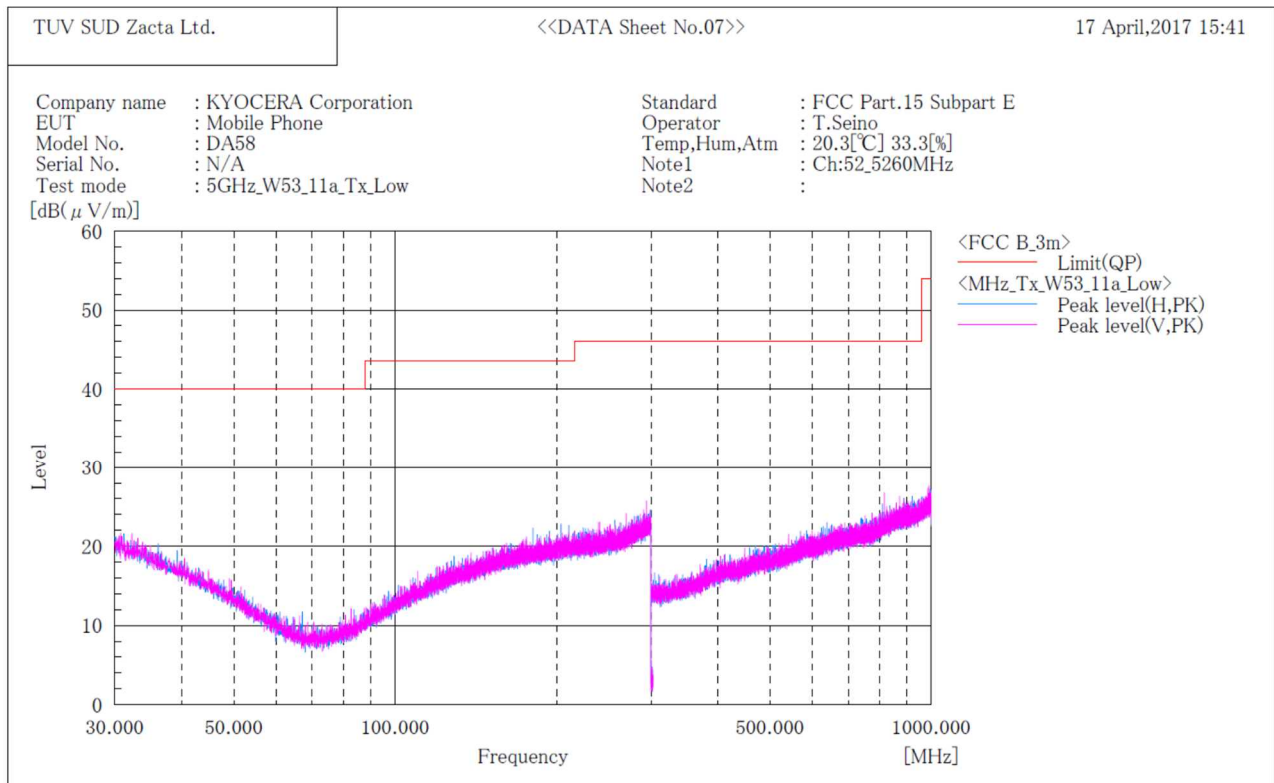

Final Result

No.	Frequency (P)	c.f	Height	Angle
	[MHz]	[dB(1/m)]	[cm]	[°]

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



Zacta

[11a]
W53 / Channel Low
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

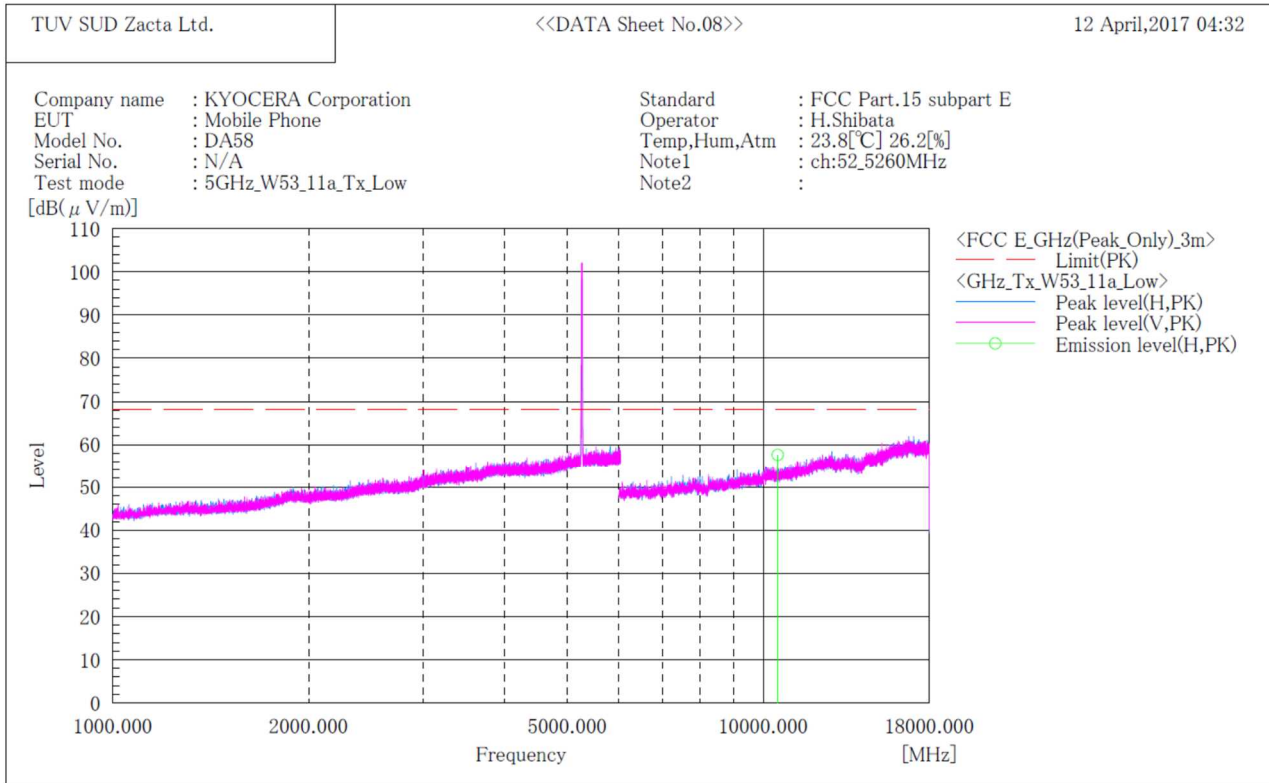

Final Result


No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]	Remark
1	10520.000	H	47.1	10.5	57.6	68.2	10.6	152.0	162.0	

Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

[11a]
W53 / Channel Middle
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

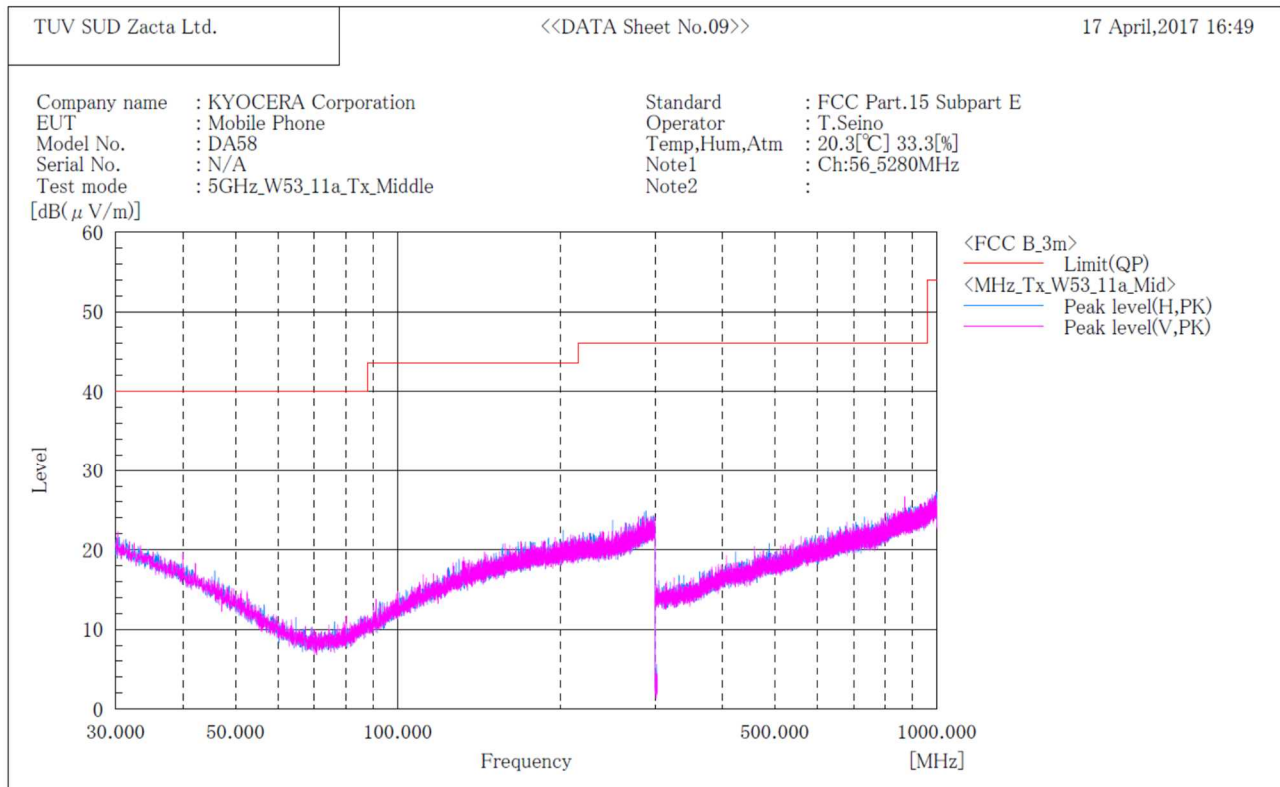

Final Result


No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11a]
W53 / Channel Middle
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

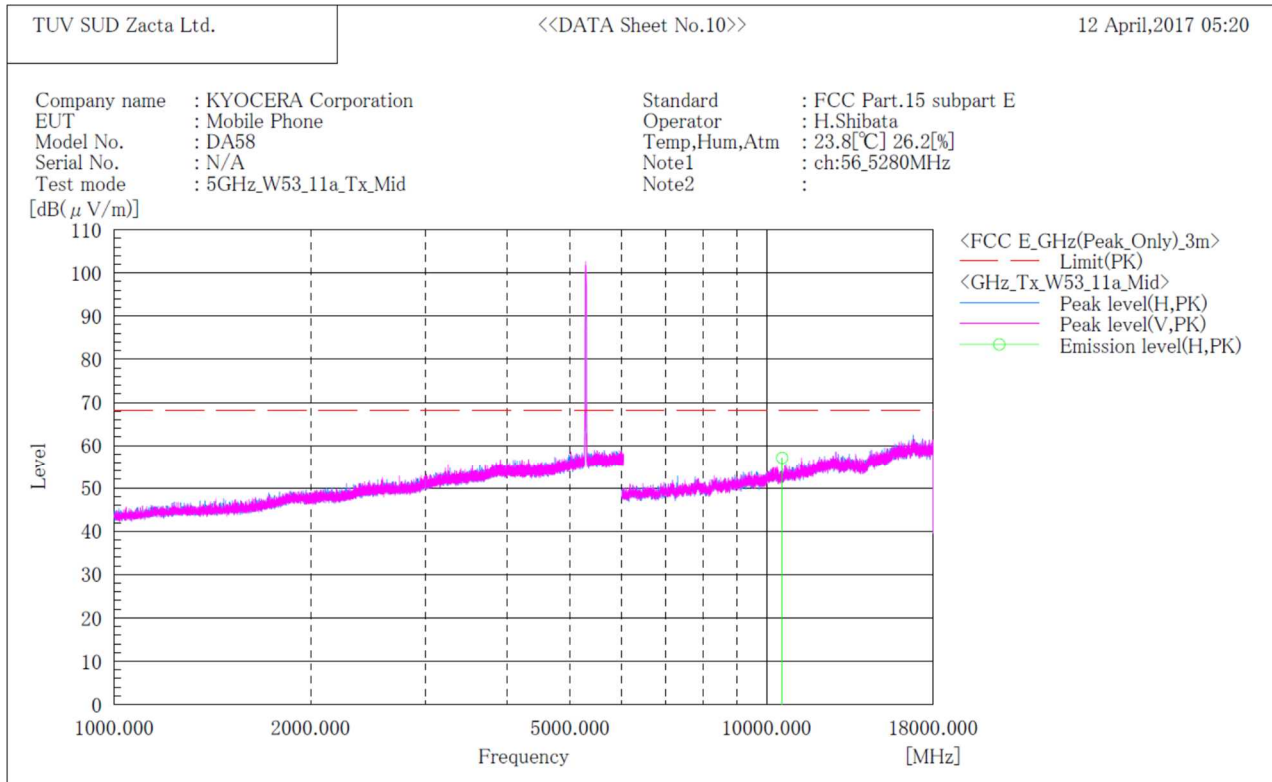

Final Result


No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]	Remark
1	10560.000	H	46.6	10.5	57.1	68.2	11.1	153.0	159.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

[11a]
W53 / Channel High
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

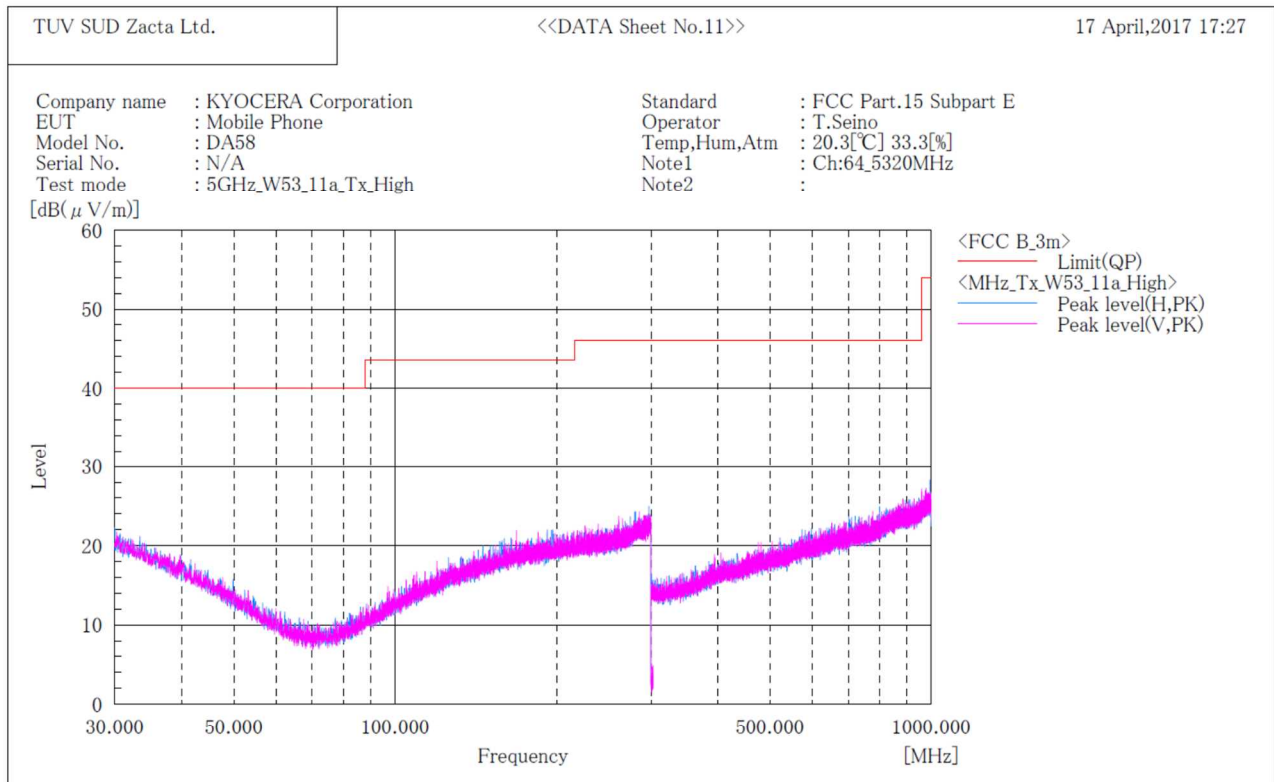

Final Result


No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11a]
W53 / Channel High
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

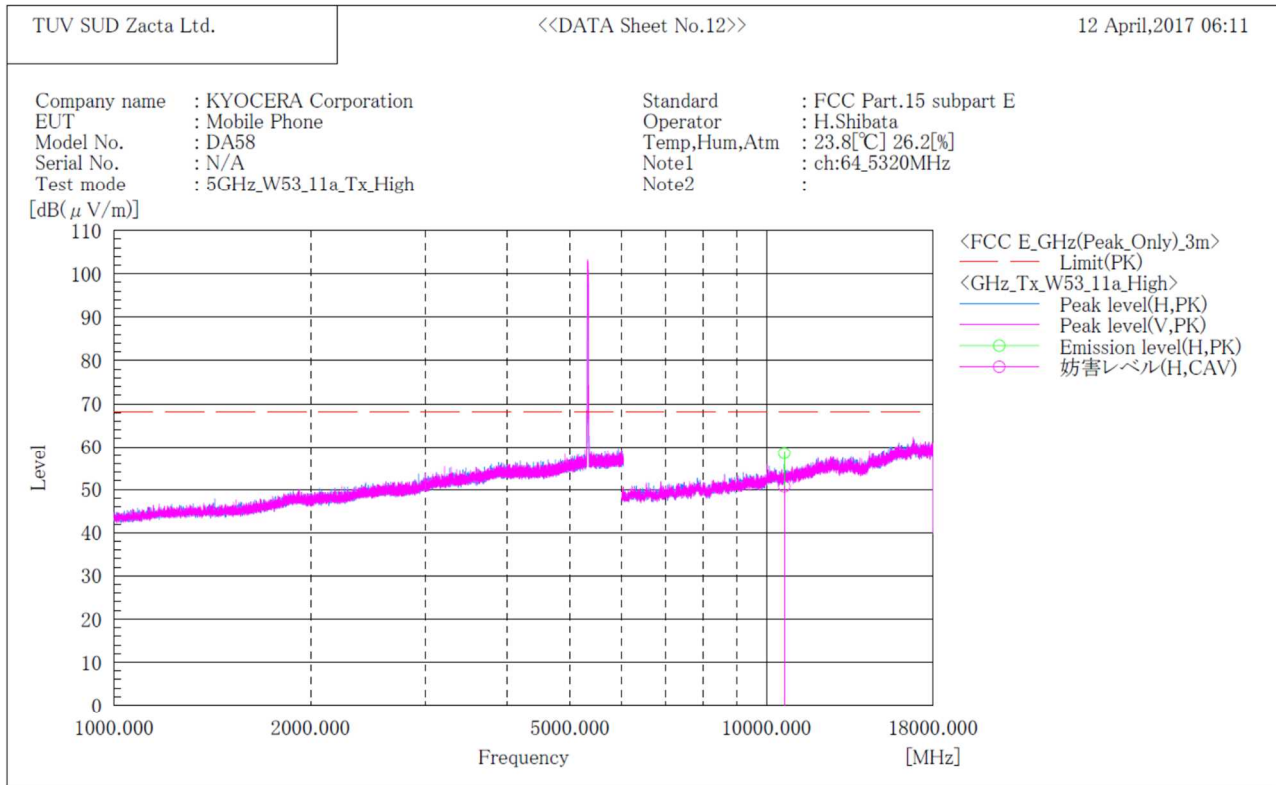

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	10640.000	H	47.9	40.1	10.6	58.5	50.7	74.0	15.5	3.3	151.0	160.0	

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.



Zacta

[11a]
W56 / Channel Low
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

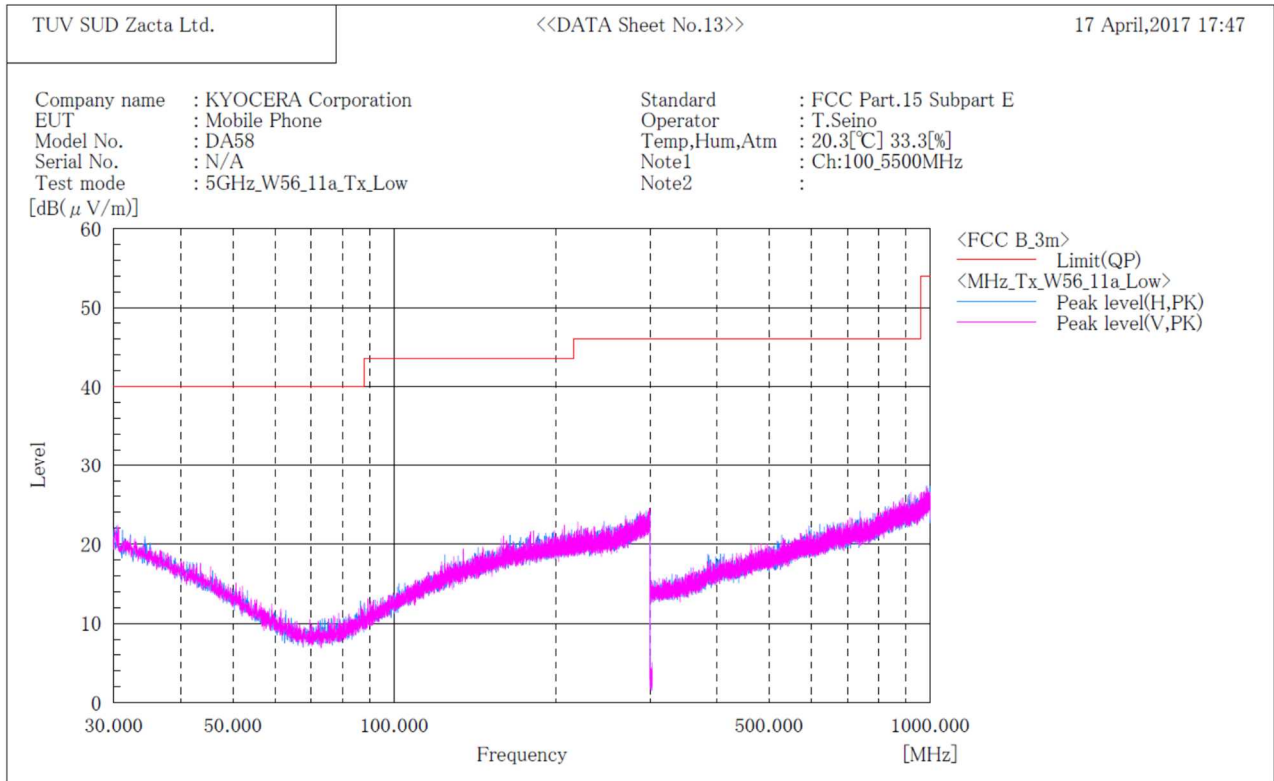

Final Result


No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11a]
W56 / Channel Low
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

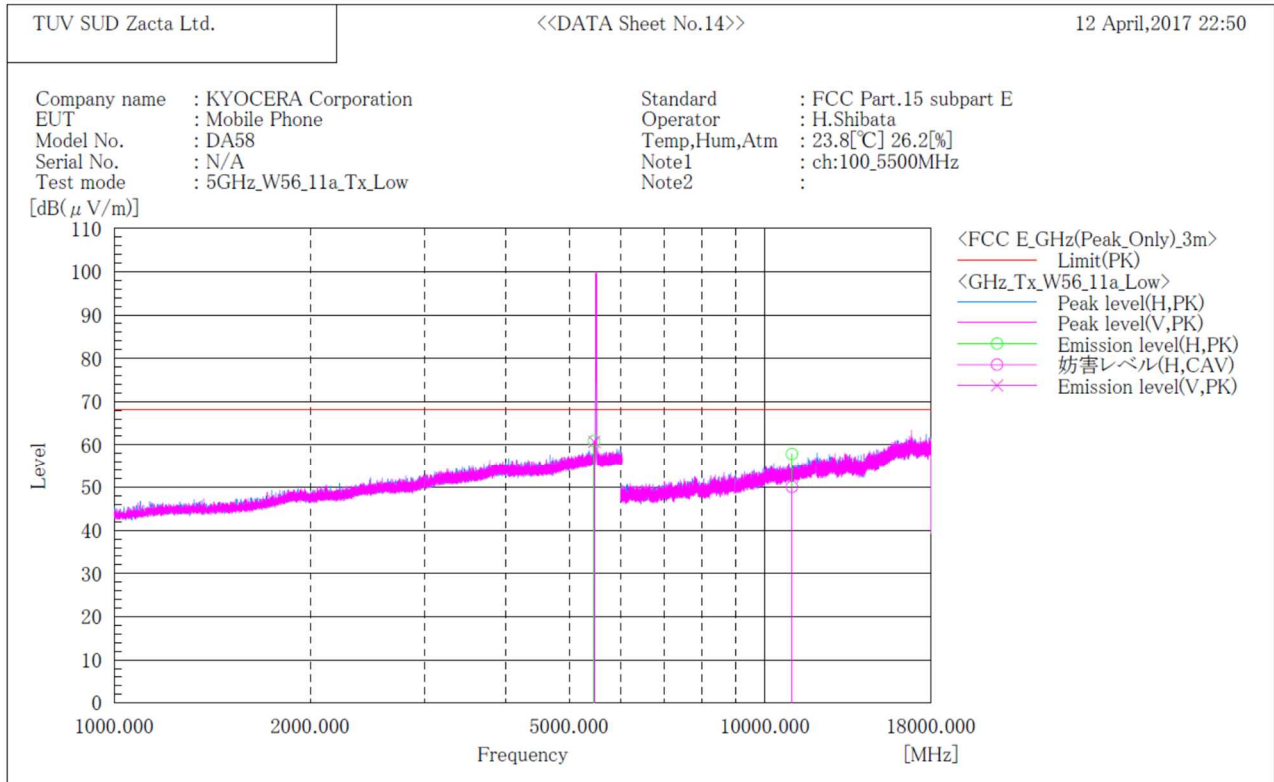

Final Result


No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	5462.100	H	50.7		10.2	60.9		68.2	7.3		161.0	214.0	
2	5462.500	V	50.5		10.2	60.7		68.2	7.5		151.0	202.0	
3	11000.000	H	46.8	39.0	11.1	57.9	50.1	74.0	16.1	3.9	160.0	185.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

[11a]
W56 / Channel Middle
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

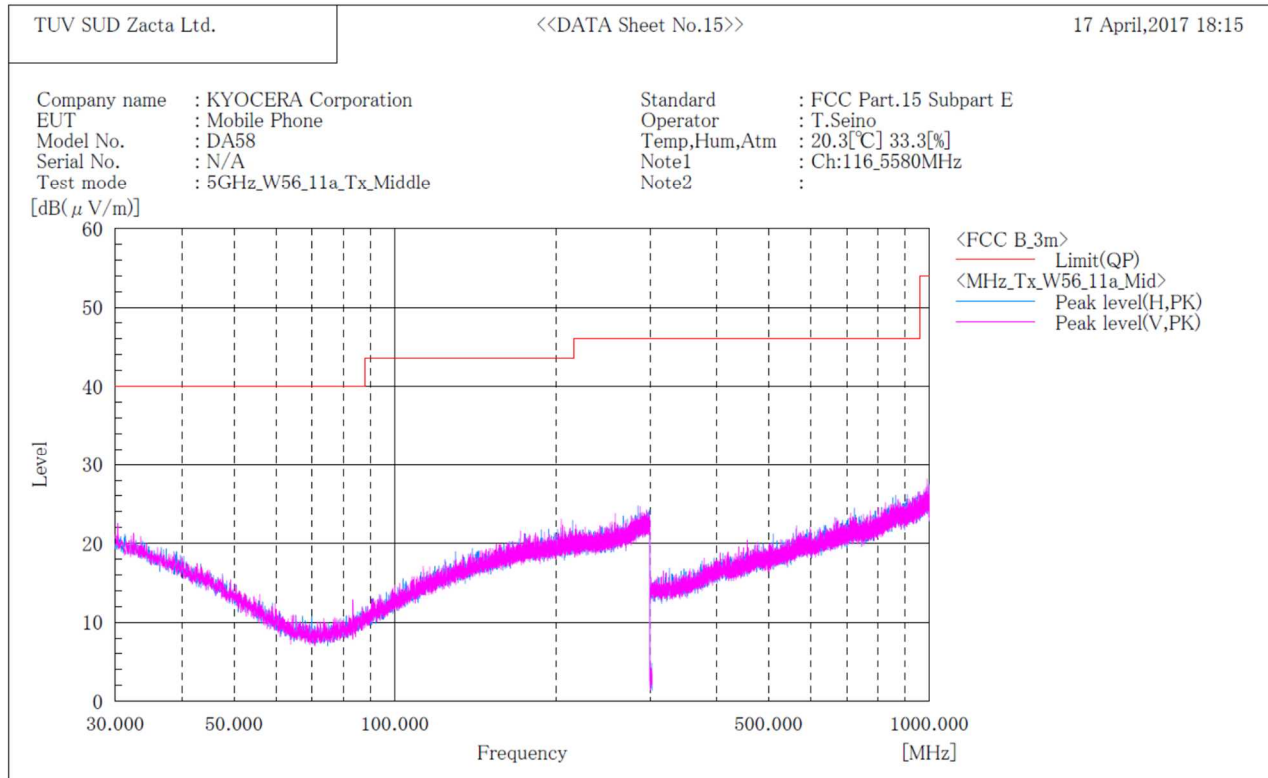

Final Result

No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



Zacta

**[11a]
W56 / Channel Middle
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

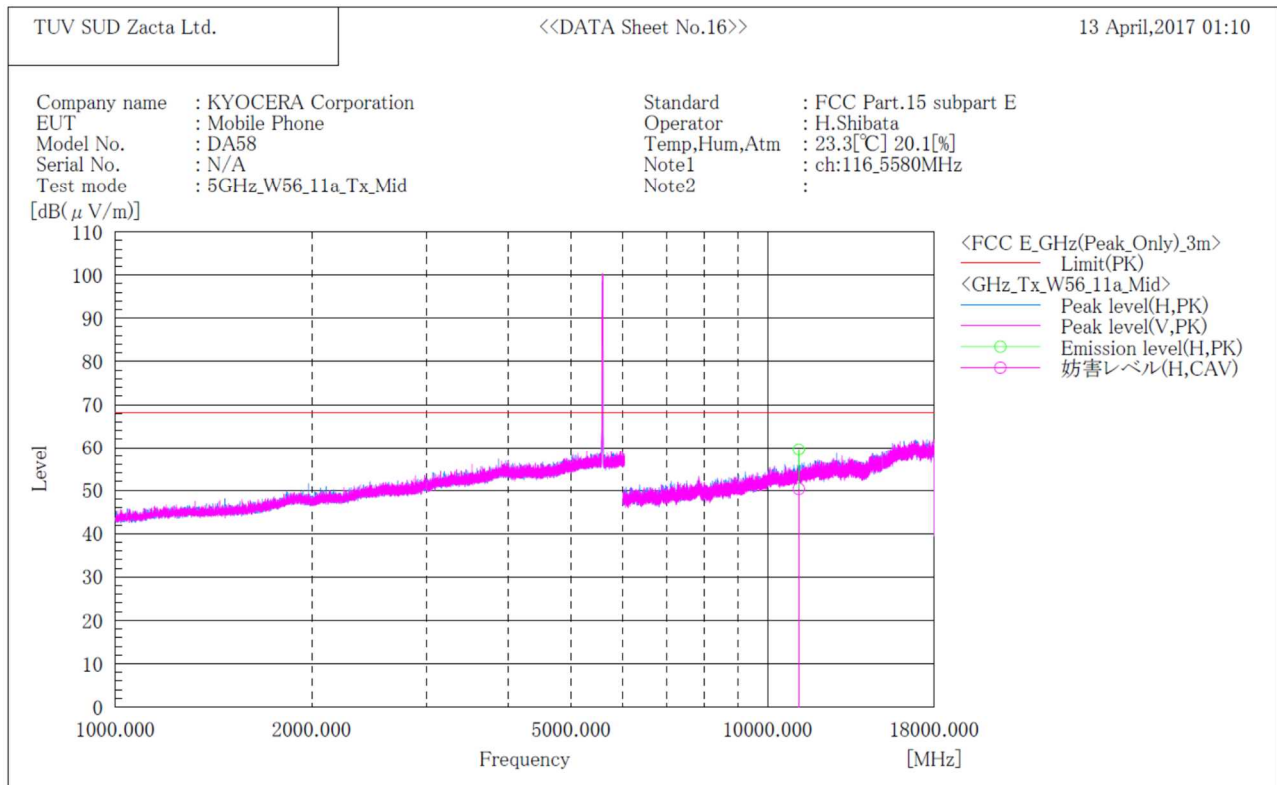

Final Result


No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	11160.000	H	48.3	39.1	11.2	59.5	50.3	74.0	14.5	3.7	145.0	190.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

[11a]
W56 / Channel High
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

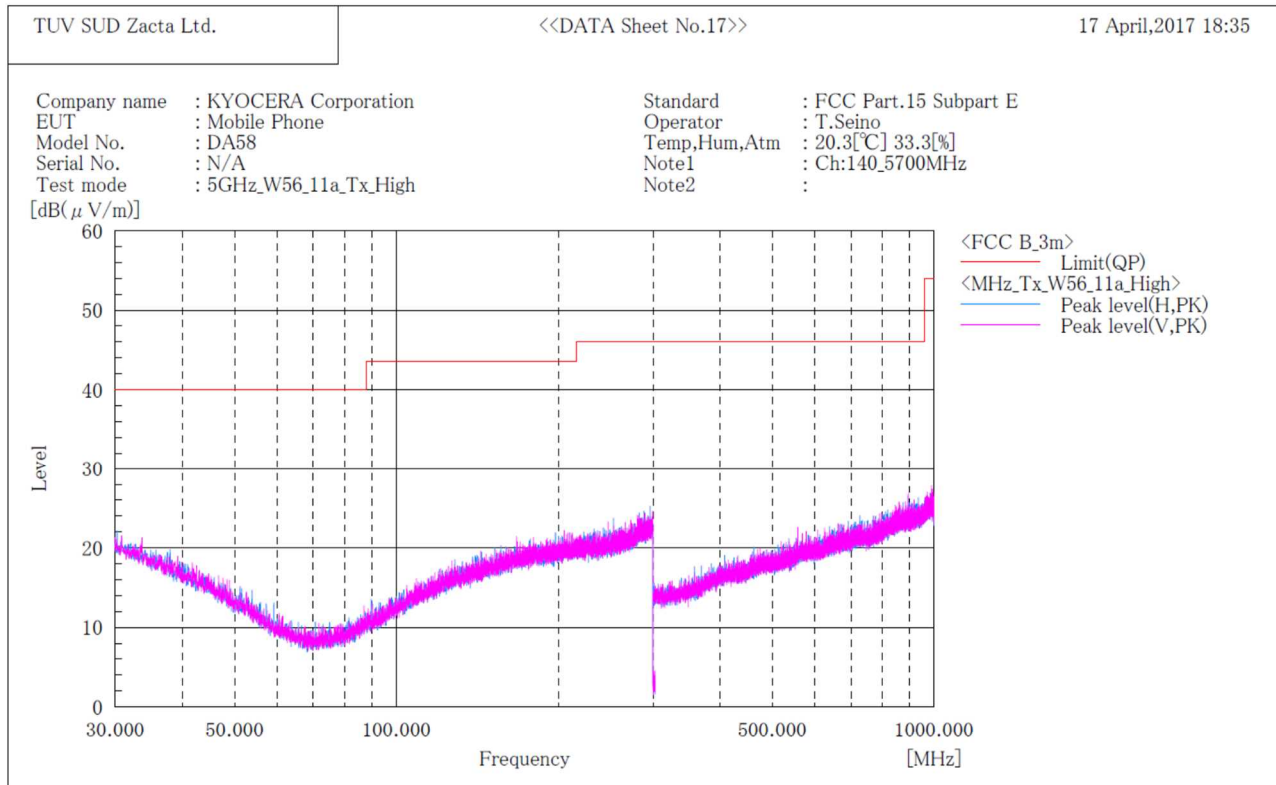

Final Result

No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



Zacta

[11a]
W56 / Channel High
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

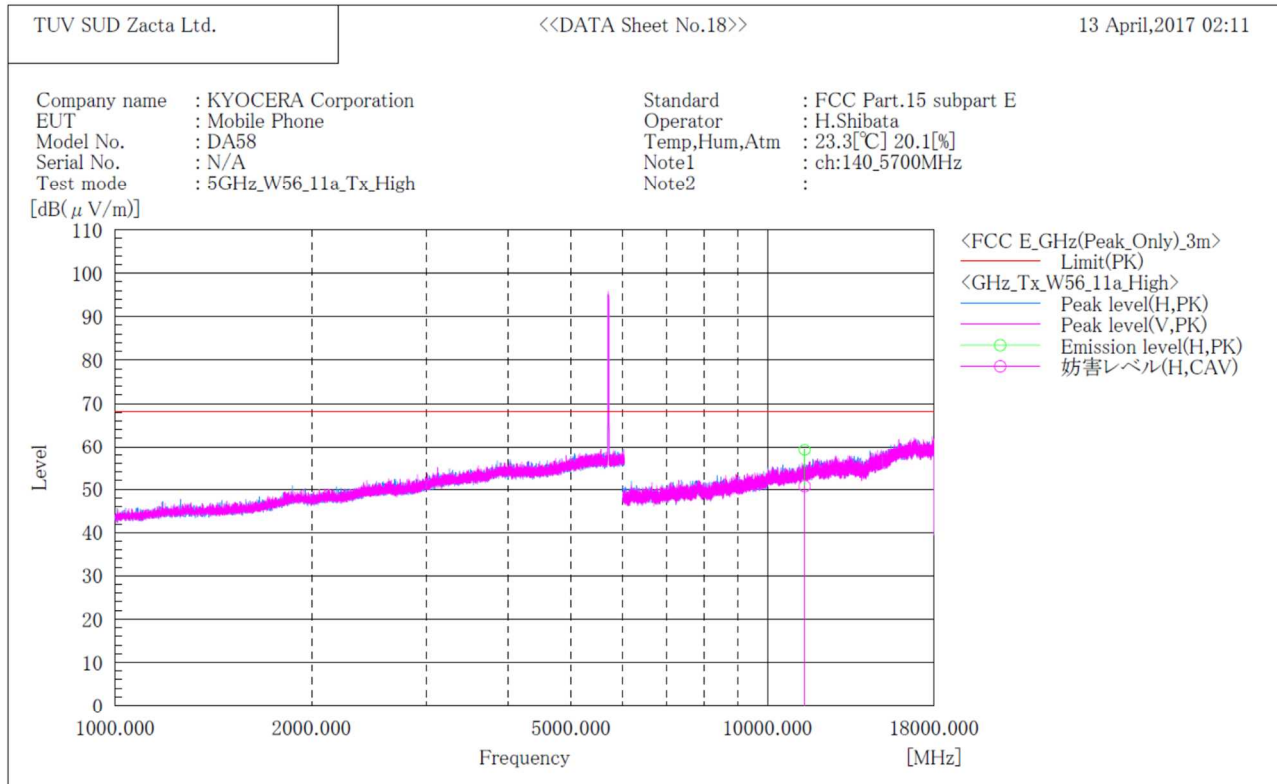

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [°]	Remark
1	11400.000	H	47.7	39.2	11.5	59.2	50.7	74.0	14.8	3.3	168.0	188.0	

Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.